DOD-STD-35-22A(MI)

16 October 1978
SUPERSEDING
MIL-STD-35-22(MI)
2 JANUARY 1974

MILITARY STANDARD

NUTS

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

FSC EDS

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Nuts
Automated Engineering
Document Preparation System

DOD-STD-35-22A(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-22A(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for nuts.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	13
	2.1	Issues of documents	13
	2.2	Other publications	14
	3.	DEFINITIONS	17
	4.	GENERAL REQUIREMENTS	19
	4.1	Introduction	19
	4.2	Specification Requirement Sheet (SRS)	19
	4.3	Configuration	19
	4.3.1	Dimensions	19
	4.3.2	Illustrations	19
	4.4	Units of measure	19
	5.	DETAILED REQUIREMENTS	21
	5.1	Introduction	21
	5.2	MSE Formats	21
	5.3	Referenced documents	21
	5.4	Test matrix	21
	5.5	Tabulation	23
	5.6	Keyword Code Index (KCI) and Standard Paragraphs	25
	5.6.1	Interrelationship of Codes	25
	5.6.2	Automatic MSE Data	25
	5.6.3	DOD-STD-35 Tables	25

TABLES

Table	I.	Title Index	2
	II.	Test matrix	22
	III.	Tabulation candidates	23

APPENDICES

Appendix	A.	Illustrations	83
	B.	Characteristic Code Index	89
		Index	91

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for nuts.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
NUT, BLIND RIVET, FLAT HEAD	156001	MS27130	
NUT, CAP	156002	FF-N-836	SQ, HEX, SLTD, CSTL, CLINCH, KNURLED AND WELDING
		MS24679	LOW CROWN
		MS24680	HIGH CROWN
		MIL-N-45913	SELF-LKG, HEX, PREVAILING TRQ
		MS51865	SELF-LKG, GENL PURPOSE
NUT, CASTELLATED	156003	FF-N-836	HEX, CAP, SLTD, CLINCH, KNURLED AND WELDING
		MS21025	HEX, BRG RTNG
		AN320	PLAIN, SHEAR
		MS9358	HEX, MIL-S-8879 THREAD
		MS9359	HEX, MIL-S-8879 THD, SILVER PLD
		MS21244	HEX, CBORED, 450 DEG F
		AN310	PLAIN, AIRFRAME
		AN121441 THRU AN121575	PLAIN HEX
NUT, CLINCH	156004	MIL-N-82512	
		MS3214	PLAIN, FLUSH
		MIL-N-45938	PLAIN, SELF-LKG
NUT, DOUBLE HEXAGON	156005	MIL-N-25027	SELF-LOCKING, STEEL
		MS90415	SELF-LKG, 160 KSI, 450 DEG F

Source: https://assist.dla.mil -- Downloaded: 20261O-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
NUT, DOUBLE HEXAGON	156005 (CONT)	MS9767	CUPWASHER LKG, CAD PLATE
NUT, EYE, THIMBLE	156006	MS21303	HOT DIP GALV (POLE LINE)
NUT, JAM	156007	FF-N-836	SQ, HEX, CAP, SLTD, CSTL, CLINCH, KNURLED AND WELDING
		AN316	HEX
		NAS509	DRILLED
		MS21264	DRILLED
NUT, PLAIN	156008	FF-N-836	SQ, HEX, SLTD, CSTL, CLINCH, KNURLED AND WELDING
		MS16994	KNURLED
		AN315	AIRFRAME
		MIL-N-21337	ROUND, RTNG, BEARING
		MS19067	ROUND, RTNG, BEARING, LIGHT SERIES
		MS19068	ROUND, RTNG, BEARING, RGLR SERIES
		MS3186	SLTD, HEX, CONN MTG
		MS15983	PLATE, NONCTSK
		MS51941	PLATE
		MS51984	CONE SEAT, HEX, WHEEL MTG
		MS53069	ASSEMBLED WSHR, FLOATING
		AN121501 THRU AN121525	PLAIN
NUT, PLAIN, HEX	156009	FF-N-836	SLTD, CSTL, CLINCH, KNURLED AND WELDING
		MS16203	NONMAGNETIC
		MS17187	(SYNCHRO)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
NUT, PLAIN, HEX	156009 (CONT)	MS25082	ELECTRICAL THIN
		MS27952	JAM, LH
		MS35649	MACHINE, UNC
		MS35650	MACHINE, UNF
		MS35690	UNC AND UNF
		MS35692	SLOTTED, UNC AND UNF
		MS45905	FINISHED, LH
		MS51858	PLASTIC, NYLON
		MS51967	CD PLD, UNC
		MS51968	CD PLD, UNF
		MS51969	BLK OXIDE FNSH, BRASS UNC
		MS51970	BLK OXIDE FNSH
		MS51971	PASSIVATED, CRES, UNC
		MS51972	PASSIVATED, CRES, UNF
		NAS1423	DRILLED JAM, THIN
		MS9099	BOSS CONN, AL
		MS9100	BOSS CONN, CRES
		MS9200	BOSS CONN, AL
		MS9201	BOSS CONN, CRES
		MS9356	MIL-S-8879 THD
		MS9357	MIL-S-8879 THD, SILVER PLD
		MS9360	MIL-S-8879 THD, SILVER PLD, DRILLED
		MS9361	CHECK
		MS9362	CHECK, SILVER PLD
		MS9363	SLTD, SHEAR, MIL-S-8879 THD
		MS9364	SLTD, SHEAR, SILVER PLD
		MS9553	BOSS CONN, CRES
		MS9881	CAD PLD
		MS9882	DRILLED, CAD PLD, MIL-S-8879 THREAD
		MS16203	NON-MAGNETIC

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:23Z
Check the source to verify that this is the currentversion before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
NUT, PLAIN, HEX	156009 (CONT)	MS16285	SEMI-FINISHED, HEAVY DUTY 1000 DEG F
		MS16286	FINISHED, 1000 DEG F
		MS17354	BOSS CONN, AL
		MS51983	SINGLE BALL SEAT, WHEEL MTG
		AN924	BULKHEAD
		AN3066	CONDUIT COUPLING
		AN150401 THRU AN150425	CHECK
		AN150426 THRU AN150450	SHEAR, SLOTTED
NUT, PROPELLER	156010	MS5011	HUB RETAINING
		MS27422	SHAFT THREAD
NUT, SELF-LOCKING	156011	FF-N-836	SQ, HEX, CAP, SLTD, CSTL, CLINCH, KNURLED AND WELDING
		MS21133	STEEL, 180 KSI FTU, 450 DEG F, FLANGED
		MIL-N-3336	INSTRUMENT MTG
		MIL-N-7873	STEEL, 1200 DEG F
		MIL-N-8922	STEEL, 450 DEG F, 220 KSI
		MS21084	STEEL, 220 KSI FTU, 450 DEG F, FLANGED
		MIL-N-8984	STEEL, 450 DEG F, 260 KSI
		MS21085	STEEL, 260 KSI FTU, 450 DEG F FLANGED
		MIL-N-25027	STEEL
		MS3376	CRES, 12 POINT CAPTIVE WASHER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
NUT, SELF-LOCKING	156011 (CONT)	MS14144	LIGHTWEIGHT CSTL 450 DEG F
		MS14145	LIGHTWEIGHT, THIN, CSTL 450 DEG F
		MS21063	CHAN, FLTG, LOW HGT, STEEL, 250 DEG F
		MS21064	CHAN, FLTG, LOW HGT, STEEL, 450 DEG F
		MS21065	CHAN, FLTG, LOW HGT, CRES, 450 DEG F AND 800 DEG F
		MS21066	CHAN, FLTG, LOW HGT, STEEL, 250 DEG F, 100 DEG CTSK
		MS21067	CHAN, FLTG, LOW HGT, STEEL, 450 DEG F, 100 DEG CTSK
		MS21068	CHAN, FLTG, LOW HGT, CRES, 450 DEG F, 800 DEG F, 100 DEG CTSK
		MS21079	GANG CHAN, 250 DEG F
		NAS577	BARREL FLOATING
		NAS1731	BLIND, SERRATED HD 450 DEG F
		NAS1734	BLIND, ELP HD 450 DEG F
		NAS1735	BLIND, ELP HD, CLOSED END, 450 DEG F
		NAS1870	PLATE, TWO LUG, DEEP CBORE, FLTG 125 KSI FTU AND 800 DEG F
		MIL-N-45913	PREVAILING TRQ

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
NUT, SELF-LOCKING	156011 (CONT)	MS51866	SPLINE, 250 DEG F
		MS51988	FLANGED, CDPL
		MS33737	CLIP-IN, INSTR
		NAS1474	PLATE, TWO LUG, CAP, FLTG, REDUCED RIVET SPACING
NUT, SELF-LOCKING, CASTELLATED	156012	MIL-N-25027	STEEL
		MS14146	HEX, CBORED, CAPTIVE WASHER, 450 DEG F
		MS17825	HEX, -250 DEG F, NONMETALLIC INSERT
		MS17826	HEX, -250 DEG F, NONMETALLIC INSERT, THIN
		MS21224	HEX, 250 DEG F, NONMETALLIC INSERT, CBORED
		MS21225	HEX, 800 DEG F
NUT, SELF-LOCKING, HEX	156013	MIL-N-7873	STEEL, 1200 DEG F
		MS20500	1200 DEG F
		MIL-N-25027	STEEL
		MS16228	250 DEG F, CRES
		MS17828	NONMETALLIC INSERT, REGULAR HGT, 250 DEG F, NI-CU
		MS17829	NONMETALLIC INSERT, REGULAR HGT, 250 DEG F, STEEL
		MS17830	NONMETALLIC INSERT, REGULAR HGT, 250 DEG F, CRES
		MS21042	RING BASE, 450 DEG F, STEEL

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
NUT, SELF-LOCKING, HEX	156013 (CONT)	MS21043	RING BASE, 800 DEG F
		MS21044	REGULAR HGT, 250 DEG F, 125 AND 60 KSI
		MS21045	REGULAR HGT, 450 DEG F, 125 KSI
		MS21046	REGULAR HGT, 800 DEG F, 125 KSI
		MS21083	NONMETALLIC INSERT, LOW HGT, 250 DEG F
		MS21245	THIN, 450 DEG F, 70 KSI
		MIL-N-45913	PREVAILING TRQ
		MS51922	PREVAILING TRQ, GENERAL PURPOSE
		MS51943	CRITICAL INSTL, 250 DEG F
NUT, SELF-LOCKING, PLATE	156014	MIL-N-7873	STEEL, 1200 DEG F
		MS20501	TWO LUG, 1200 DEG F
		MIL-N-25027	STEEL
		MS21047	TWO LUG, LOW HGT, 450 DEG F
		MS21048	TWO LUG LOW HGT, 450 DEG F AND 800 DEG F, CRES
		MS21049	TWO LUG, 100 DEG CTSK, 450 DEG F
		MS21050	100 DEG CTSK, 450 DEG F AND 800 DEG F, CRES
		MS21051	ONE LUG, LOW HGT, 450 DEG F, 125 KSI

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
NUT, SELF-LOCKING, PLATE	156014 (CONT)	MS21052	ONE LUG, LOW HGT, 450 DEG F AND 800 DEG F,
		MS21053	ONE LUG, LOW HGT, 450 DEG F, 100 DEG CTSK
		MS21054	ONE LUG, LOW HGT, 450 DEG F AND 800 DEG F, 100 DEG CTSK, CRES
		MS21055	CORNER, LOW HGT 450 DEG F
		MS21056	CORNER, LOW HGT 450 DEG F AND 800 DEG F, CRES
		MS21057	CORNER, 100 DEG CTSK, 450 DEG F
		MS21058	CORNER, 100 DEG CTSK, 450 DEG F AND 800 DEG F, CRES
		MS21059	TWO LUG FLTG, LOW HGT, 450 DEG F
		MS21060	TWO LUG FLTG, LOW HGT, 450 DEG F AND 800 DEG F CRES
		MS21061	ONE LUG FLTG, 450 DEG F
		MS21062	ONE LUG FLTG, LOW HGT, 450 DEG F AND 800 DEG F, CRES
		MS21069	TWO LUG, REDUCED RIVET SPACING, 450 DEG F
		MS21070	TWO LUG, REDUCED RIVET SPACING, 450 DEG F AND 800 DEG F, CRES

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
NUT, SELF-LOCKING, PLATE	156014 (CONT)	MS21071	ONE LUG, REDUCED RIVET SPACING, 450 DEG F
		MS21072	ONE LUG, REDUCED RIVET SPACING, 450 DEG F AND 800 DEG F, CRES
		MS21073	CORNER, REDUCED RIVET SPACING, 450 DEG F, LOW HGT
		MS21074	CORNER, REDUCED RIVET SPACING, 450 DEG F AND 800 DEG F, LOW HGT, CRES
		MS21075	TWO LUG FLTG, REDUCED RIVET SPACING, LOW HGT, 450 DEG F
		MS21076	TWO LUG FLTG, REDUCED RIVET SPACING, 450 DEG F AND 800 DEG F, CRES
		MS21077	TWO LUG FLTG, NONMETALLIC INSERT, 250 DEG F
		MS21078	TWO LUG, NONMETALLIC INSERT, 250 DEG F
		MS21080	ONE LUG, NONMETALLIC INSERT, 250 DEG F
		MS21081	CORNER, NONMETALLIC INSERT, 250 DEG F

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
NUT, SELF-LOCKING, PLATE	156014 (CONT)	MS21082	ONE LUG FLTG, NONMETALLIC INSERT, 250 DEG F
		MS21086	SIDE BY SIDE RIVETS, LOW HGT 450 DEG F
		MS21087	SIDE BY SIDE RIVETS, 450 DEG F AND 800 DEG F, CRES
		AN256	RIGHT ANGLE
NUT, SPANNER	156015	MIL-N-21337	ROUND, RING, BEARING
		MS27955	PLAIN ROUND
		MS9951	CUPWASHER LOCKED
		MS9984	END SLOTS, CUPWASHER LOCKED, A-286, SILVER PLD MIL-S-8879
		MS172236 THRU MS172270	BEARING RETAINING
		MS172321 THRU MS172370	AERONAUTICAL
NUT, SQUARE, PLAIN	156016	FF-N-836	CAP, SLTD, CSTL CLINCH, KNURLED AND WELDING
		MS16211	UNFIN COPPER SILICON, NONMAGNETIC
		MS27040	CADMIUM PLATED
		MS21304	
NUT, SQUARE, HEX, CAP, SLOTTED, CASTELLATED, CLINCH, KNURLED, WELDING	156017	FF-N-836	SINGLE BALL SEAT
		MIL-F-19700	SQ, HEX, TYPE I, II, III, IV, V, FASTENER
		ANSI-B18.2.2	SQUARE

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
NUT, STAMPED	156018	MIL-N-3337	SHEET, SPRING
		MS90723	SHEET, SPRING, J TYPE
		MS90724	SHEET, SPRING, U TYPE
		MS27151	STANDARD
		MS51857	PUSH-ON, STEEL
NUT, WELDING	156019	FF-N-836	SQ, HEX, CAP, SLTD, CSTL, CLINCH, KNURLED
		MS27127	PILOTLESS
		MS27128	PILOT
NUT, WING	156020	FF-N-845	PLAIN
		MS35425	PLAIN
		MS35426	PLAIN UNF
		MS90342	GROOVED WASHER
NUT, PLATE, RIGHT ANGLE	156021	AN256	SELF-LOCKING

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on the date of invitation for bids or request for proposals, form a part of this standard to the extent specified herein.

SPECIFICATION

FEDERAL

FF-N-836	Nut, Square, Hex, Cap, Slotted, Castle, Knurled, Welding and Single Ball Seat
PPP-H-1581	Hardware (Fastener and Related Items), Packaging and Packing for Shipment and Storage Of

MILITARY

MIL-B-857	Bolts, Nuts, and Studs
MIL-S-1222	Nut, Plain, Hex, High Temperature
MIL-N-3336	Nut, Self-Locking, Instrument Mounting
MIL-I-6866	Inspection, Penetrant Method Of
MIL-I-6868	Inspection Process, Magnetic Particle
MIL-S-7742	Screw Threads, Standard, Optimum Selected Series, General Specification For
MIL-N-7873	Nut, Self-Locking, Steel, 1200 Degrees F
MIL-C-8837	Coating, Cadmium (Vacuum Deposited)
MIL-S-8879	Screw Threads, Controlled Radius Root With Increased Minor Diameter, General Specification For
MIL-N-8922	Nut, Self-Locking, Steel, 450 Degrees F, 220 KSI
MIL-N-8984	Nut, Self-Locking, Steel, 450 Degrees F, 260 KSI
MIL-N-8985	Nut, Self-Locking, Steel, 260 KSI FTU 450 Degrees F

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

MIL-I-17214	Indicator, Permeability, Low-Mu (Go-No-Go)
MIL-N-25027	Nut, Self-Locking, Steel
MIL-N-45913	Nut, Self-Locking, Prevailing Torque
MIL-N-45938	Nut, Clinch, Plain, Round

STANDARDS

FEDERAL

FED-STD-00H28	Screw Thread Standards for Federal Services
FED-STD-151	Metal, Test Method
FED-STD-406	Plastic, Methods of Testing

MILITARY

MIL-STD-1312	Fastener, Test Methods

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ANSIB46.1	Surface Texture

(Application for copies should be addressed to the American National Standards Institute, 1430 Broadway, New York, NY 10018.)

ASTMB117	Method of Salt Spray (Fog) Testing
ASTMB154	Mercurous Nitrate Test for Copper and Copper Alloys, Standard Method Of
ASTME10	Method of Test for Brinell Hardness
ASTME18	Rockwell Hardness and Rockwell Superficial Hardness of Metallic Materials, Test For
ASTME380	Metric Practice Guide

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

(Application for copies should be addressed to American Society for Testing and Materials, 1916 Race St., Philadelphia, PA 19103.)

IFI106 Surface Discontinuities on Nuts for Automotive Applications

(Application for copies should be addressed to Industrial Fasteners Institute, 1505 East Ohio Building, 1717 East Ninth St., Cleveland, Ohio 44114.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to nuts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for nuts, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to nuts.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to nuts.

4.3.2 Illustrations. Illustrations applicable to nuts are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Test matrix. A test matrix is supplied as a guide for selecting documents to specify tests (see table II). The test matrix presents documents most applicable for use to satisfy the statement "TEST PER (DOC DES)". Any document listed in the Title Index may be used to satisfy the statement. However, the selected document from the Title Index must contain the desired test. Government test method documents and approved industry standards such as ASTM test methods may also be used to satisfy the statement "TEST PER (DOC DES)".

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE II. TEST MATRIX.

DOCUMENT	TEST CODE	Thread Designation (US) 2233	Thread Designation (SI) 2247	Embrittlement Relief 1996	Surface Roughness 3253	Metric Practices 2247	Hardness 3143	Wrench Torque 2135	Locking Torque 2151	Axial Tensile Strength 1834	Stress Durability 1876	Proof Load 1886	Discontinuities 3265	Resistance to Removal 1912
FF-N-836		X	X		X		X				X		X	
MIL-S-1222				X			X					X		
MIL-S-7742		X	X											
MIL-N-7873								X	X					
MIL-N-8879		X	X											
MIL-N-8922									X					
MIL-N-8984									X					
MIL-N-8985									X					
MIL-N-25027				X	X		X	X	X	X	X		X	X
MIL-N-45913				X			X	X	X			X		
MIL-N-45938				X										X
MIL-N-82512														X
MIL-STD-1312							X	X		X	X			
ASTMB17							X							
ASTME10							X							
ASTME18							X							
ASTME380						X								
ASTME384							X							
HBH28		X	X											
IFI106													X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

5.5 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table III provides codes for column headings which may be used for nut characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

TABLE III. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
2235	THREAD (DES)	2249	THREAD DIA X PITCH	7022	WT MAX EA OUNCES
7023	WT MAX EA POUNDS	7021	WT MAX EA GRAMS	7024	WT MAX EA KILOGRAMS
7041	WT PER 100 OUNCES	7042	WT PER 100 POUNDS	7043	WT PER 100 GRAMS
7044	WT PER 100 KILOGRAMS	6996	WT NOM EA OUNCES	6997	WT NOM EA POUNDS
6998	WT NOM EA GRAMS	6999	WT NOM EA KILOGRAMS		

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the currentversion before use.

5.6 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.6.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.6.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.6.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT	0700
ONE SECTION DOCUMENT	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6874 THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).

0107

0108 0108.

SCOPE.

SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR *TITLE CODE*.

PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.

PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

6941 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.

6942 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION	
TYPE (DESIGNATION)	2201
GRADE (DESIGNATION)	2203
CLASS (DESIGNATION)	2205
STYLE (DESIGNATION)	2207
COMPOSITION (DESIGNATION)	2263
TEMPERATURE RATING	
MAXIMUM SERVICE (DEGREES CELSIUS)	4905
MINIMUM SERVICE (DEGREES CELSIUS)	4904
CONFIGURATION	
(ILLUSTRATION NUMBER)	1009
*UNITS (SELECT ONE)	
U.S. (SELECT ONE)	
(INCHES)	7572

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CLASSIFICATION.
2201	TYPE. TYPE 2201 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
2203	GRADE. GRADE 2203 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
2205	CLASS. CLASS 2205 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
2207	STYLE. STYLE 2207 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
2263	COMPOSITION. COMPOSITION 2263 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
	TEMPERATURE RATING.
4905	THE MAXIMUM SERVICE TEMPERATURE RATING SHALL BE 4905 DEGREES CELSIUS.
4904	THE MINIMUM SERVICE TEMPERATURE RATING SHALL BE 4904 DEGREES CELSIUS.
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONFIGURATION (CONT)	
U.S. (CONT)	
(FEET)	7573
(YARDS)	7574
SI (SELECT ONE)	
(CENTIMETERS)	7576
(MILLIMETERS)	7577
(METERS)	7578
ILLUSTRATIONS	
(NUMBER)	4950

NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.

TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7573	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN FEET OR DEGREES.
7574	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN YARDS OR DEGREES.
7576	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN CENTIMETERS OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
7578	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN METERS OR DEGREES.
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE IX IS USED.	
METALS	
DISSIMILAR METALS.	7580
DESIGN AND CONSTRUCTION	
BEARING SURFACE (SELECT ONE)	
MAXIMUM DEVIATION FROM PERPENDICULAR AXIS (INCH)	2209
MAXIMUM DEVIATION FROM PERPENDICULAR AXIS (MILLIMETERS)	2265
MAXIMUM DEVIATION FROM PERPENDICULAR AXIS (DEGREES)	2267

Source: https://assist.dla.mil -- Downloaded: 20261O-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

7580 METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.

DESIGN AND CONSTRUCTION.

2209 BEARING SURFACE. THE BEARING SURFACE DEVIATION FROM THE PERPENDICULAR AXIS SHALL BE NOT GREATER THAN 2209 INCH.

2265 BEARING SURFACE. THE BEARING SURFACE DEVIATION FROM THE PERPENDICULAR AXIS SHALL BE NOT GREATER THAN 2265 MILLIMETERS.

2267 BEARING SURFACE. THE BEARING SURFACE DEVIATION FROM THE PERPENDICULAR AXIS SHALL BE NOT GREATER THAN 2267 DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
CONCENTRICITY (SELECT ONE)	
MAXIMUM DEVIATION (INCH)	2269
MAXIMUM DEVIATION (MILLIMETERS)	2271
COLOR	
COLOR (NAME)	2211
(DESIGNATION)	2213
*PER DOCUMENT (DOC DES)	2215
CLASS (NUMBER)	2217
KNURLING	
PER DOCUMENT (DOC DES)	2219
TYPE (SELECT ONE)	
SPIRAL.	2221
DIAMOND.	2223
90 DEGREE "V".	2225
CLASS (SELECT ONE)	
FINE.	2227
MEDIUM.	2229
COARSE.	2231

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2269	CONCENTRICITY. THE DEVIATION FROM CONCENTRICITY OF THE OUTER SURFACE SHALL BE NOT GREATER THAN 2269 INCH.
2271	CONCENTRICITY. THE DEVIATION FROM CONCENTRICITY OF THE OUTER SURFACE SHALL BE NOT GREATER THAN 2271 MILLIMETERS.
	COLOR.
2211	THE COLOR SHALL BE 2211.
2213	COLOR DESIGNATION 2213 SHALL APPLY.
2215	THE COLOR SHALL BE IN ACCORDANCE WITH 2215.
2217	COLOR CLASS NUMBER 2217 SHALL APPLY.
	KNURLING.
2219	KNURLING SHALL BE IN ACCORDANCE WITH 2219.
2221	KNURLING SHALL BE OF THE SPIRAL TYPE.
2223	KNURLING SHALL BE OF THE DIAMOND TYPE.
2225	KNURLING SHALL BE OF THE 90 DEGREE V TYPE.
2227	KNURLING SHALL BE OF THE FINE CLASS.
2229	KNURLING SHALL BE OF THE MEDIUM CLASS.
2231	KNURLING SHALL BE OF THE COARSE CLASS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
THREAD DESIGNATION (SELECT ONE)	
U.S. (SELECT ONE)	
PER DOCUMENT (DOC DES)	2233
THREAD DESIGNATION (SPECIFY)	2235
THREAD DIRECTION (LH OR RH)	2237
SI (SELECT ONE)	
PER DOCUMENT (DOC DES)	2247
THREAD CALLOUT (DIAMETER X PITCH)	2249
THREAD DIRECTION (LH OR RH)	2251
THREAD FORMING METHOD (SELECT ONE)	
PER DOCUMENT (DOC DES)	2253

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	THREAD DESIGNATION.
2233	THE THREAD DESIGNATION SHALL BE IN ACCORDANCE WITH 2233.
2235	THE THREAD DESIGNATION SHALL BE 2235.
2237	THE DIRECTION OF THE THREADS SHALL BE 2237.
2247	THE THREAD DESIGNATION SHALL BE IN ACCORDANCE WITH 2247.
2249	THE THREAD CALLOUT SHALL BE 2249.
2251	THE DIRECTION OF THE THREAD SHALL BE 2251.
	THREAD FORMING METHOD.
2253	THE THREAD FORMING METHOD SHALL BE IN ACCORDANCE WITH 2253.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
THREAD FORMING METHOD (CONT)	
THREAD AREA FORMED BY: (SELECT ONE)	
CUTTING.	2255
ROLLING.	2257
MOLDING.	2259
(SPECIFY)	2261
WEIGHT	
MAXIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2255	THE THREAD AREA SHALL BE FORMED BY CUTTING.
2257	THE THREAD AREA SHALL BE FORMED BY ROLLING.
2259	THE THREAD AREA SHALL BE FORMED BY MOLDING.
2261	THE THREAD AREA SHALL BE FORMED BY 2261.
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7023	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).
7021	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
WEIGHT (CONT)	
MAXIMUM WEIGHT PER 100 (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7041
(POUNDS)	7042
SI (SELECT ONE)	
(GRAMS)	7043
(KILOGRAMS)	7044
NOMINAL WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	6996
(POUNDS)	6997
SI (SELECT ONE)	
(GRAMS)	6998
(KILOGRAMS)	6999

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7041	MAXIMUM WEIGHT PER 100. THE WEIGHT PER 100 UNITS SHALL BE NOT GREATER THAN 7041 OUNCE(S).
7042	MAXIMUM WEIGHT PER 100. THE WEIGHT PER 100 UNITS SHALL BE NOT GREATER THAN 7042 POUND(S).
7043	MAXIMUM WEIGHT PER 100. THE WEIGHT PER 100 UNITS SHALL BE NOT GREATER THAN 7043 GRAM(S).
7044	MAXIMUM WEIGHT PER 100. THE WEIGHT PER 100 UNITS SHALL BE NOT GREATER THAN 7044 KILOGRAM(S).
6996	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6996 OUNCE(S).
6997	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6997 POUND(S).
6998	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6998 GRAM(S).
6999	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6999 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
WEIGHT (CONT)	
NOMINAL WEIGHT PER 100 (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7035
(POUNDS)	7036
SI (SELECT ONE)	
(GRAMS)	7037
(KILOGRAMS)	7038
AXIAL TENSILE STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1853
AS FOLLOWS:	1856
MINIMUM ULTIMATE TENSILE STRENGTH (SELECT ONE)	
(THOUSAND POUNDS PER SQUARE INCH)	1858
(KILOPASCALS)	1861

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7035	NOMINAL WEIGHT PER 100. THE WEIGHT PER 100 UNITS SHALL BE 7035 OUNCE(S).
7036	NOMINAL WEIGHT PER 100. THE WEIGHT PER 100 UNITS SHALL BE 7036 POUND(S).
7037	NOMINAL WEIGHT PER 100. THE WEIGHT PER 100 UNITS SHALL BE 7037 GRAM(S).
7038	NOMINAL WEIGHT PER 100. THE WEIGHT PER 100 UNITS SHALL BE 7038 KILOGRAM(S).
1853	AXIAL TENSILE STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1853.
1856	AXIAL TENSILE STRENGTH. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1858	THE ULTIMATE TENSILE STRENGTH SHALL BE NOT LESS THAN 1858 THOUSAND POUNDS PER SQUARE INCH.
1861	THE ULTIMATE TENSILE STRENGTH SHALL BE NOT LESS THAN 1861 KILOPASCAL(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
AXIAL TENSILE STRENGTH (CONT)	
AS FOLLOWS: (CONT)	
MINIMUM YIELD TENSILE STRENGTH (SELECT ONE)	
(THOUSAND POUNDS PER SQUARE INCH)	1863
(KILOPASCALS)	1865
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1831
PER DOCUMENT (DOC DES)	1834
CARBURIZATION AND DECARBURIZATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3003
PER MIL-B-857 LIMITS.	3009
AS FOLLOWS:	3027

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1863	THE YIELD TENSILE STRENGTH SHALL BE NOT LESS THAN 1863 THOUSAND POUNDS PER SQUARE INCH.
1865	THE YIELD TENSILE STRENGTH SHALL BE NOT LESS THAN 1865 KILOPASCAL(S).
1831	AXIAL TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1831.
1834	AXIAL TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1834.
3003	CARBURIZATION AND DECARBURIZATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3003.
3009	CARBURIZATION AND DECARBURIZATION. THE DECARBURIZATION OF THE THREAD AREA SHALL BE NOT GREATER THAN THE LIMITS SHOWN IN MIL-B-857.
3027	CARBURIZATION AND DECARBURIZATION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CARBURIZATION AND DECARBURIZATION (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM DECARBURIZATION DEPTH (SELECT ONE)	
(INCH)	3037
(MILLIMETERS)	3083
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3085
PER MIL-B-857.	3093
CHEMICAL ANALYSIS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3121
AS FOLLOWS:	3123
SUPPLIER CERTIFICATION.	3125
COMPOSITION ____	3135

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3037	THE DECARBURIZATION DEPTH SHALL BE NOT GREATER THAN 3037 INCH(S).
3083	THE DECARBURIZATION DEPTH SHALL BE NOT GREATER THAN 3083 MILLIMETER(S).
3085	CARBURIZATION AND DECARBURIZATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3085.
3093	CARBURIZATION AND DECARBURIZATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-B-857.
3121	CHEMICAL ANALYSIS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3121.
3123	CHEMICAL ANALYSIS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3125	SUPPLIER CERTIFICATION MAY BE ACCEPTED IN LIEU OF A SPECIFIC CHEMICAL ANALYSIS.
3135	COMPOSITION OF MATERIAL SHALL BE 3135.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CHEMICAL ANALYSIS (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3127
PER DOCUMENT (DOC DES)	3131
METHOD (NUMBER)	3133
DISCONTINUITIES	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3259
AS FOLLOWS:	3263
MAXIMUM DEPTH (SELECT ONE)	
(INCH)	3267
(MILLIMETERS)	3255
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3243
PER DOCUMENT (DOC DES)	3265

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3127	CHEMICAL ANALYSIS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3127.
3131	CHEMICAL ANALYSIS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3131.
3133	TEST METHOD 3133 SHALL APPLY.
3259	DISCONTINUITIES. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3259.
3263	DISCONTINUITIES. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3267	THE DEPTH OF DISCONTINUITIES SHALL BE NOT GREATER THAN 3267 INCH.
3255	THE DEPTH OF DISCONTINUITIES SHALL BE NOT GREATER THAN 3255 MILLIMETER(S).
3243	DISCONTINUITIES. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3243.
3265	DISCONTINUITIES. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3265.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
EMBRITTLEMENT RELIEF	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2011
AS FOLLOWS:	2021
NO EMBRITTLEMENT FROM PLATING PROCESS.	2023
EMBRITTLEMENT SHALL BE MINIMIZED.	2026
EMBRITTLEMENT RELIEF TREATMENT PER PLATING OR COATING SPECIFICATION.	2028
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1995
PER DOCUMENT (DOC DES)	1996
METHOD (DESIGNATION)	1988
TEST DURATION (HOURS)	1998
FLATTENING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1955
NO CRACKS OR FRACTURES.	1958

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2011	EMBRITTLEMENT RELIEF. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2011.
2021	EMBRITTLEMENT RELIEF. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2023	THERE SHALL BE NO EMBRITTLEMENT FROM THE PLATING PROCESS.
2026	EMBRITTLEMENT SHALL BE MINIMIZED.
2028	EMBRITTLEMENT RELIEF SHALL BE IN ACCORDANCE WITH THE PLATING DOCUMENT.
1995	EMBRITTLEMENT RELIEF. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1995.
1996	EMBRITTLEMENT RELIEF. TESTING SHALL BE IN ACCORDANCE WITH 1996.
1988	TEST METHOD 1988 SHALL APPLY.
1998	THE TEST DURATION SHALL BE 1998 HOURS.
1955	FLATTENING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1955.
1958	FLATTENING. THE NUT SHALL NOT CRACK OR FRACTURE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLATTENING (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1941
PER MIL-B-857.	1945
HARDNESS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3159
AS FOLLOWS:	3181
HARDNESS TESTER (NAME)	3183
HARDNESS SCALE (DESIGNATION)	3185
HARDNESS VALUE	
MINIMUM (NUMBER)	3192
MAXIMUM (NUMBER)	3194
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3141
PER DOCUMENT (DOC DES)	3143

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1941	FLATTENING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1941.
1945	FLATTENING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-B-857.
3159	HARDNESS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3159.
3181	HARDNESS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3183	THE 3183 HARDNESS TESTER SHALL BE USED.
3185	THE 3185 SCALE SHALL APPLY.
3192	THE HARDNESS VALUE SHALL BE NOT LESS THAN 3192.
3194	THE HARDNESS VALUE SHALL BE NOT GREATER THAN 3194.
3141	HARDNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3141.
3143	HARDNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3143.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LOCKING TORQUE (SELF-LOCKING NUTS)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3089
AS FOLLOWS:	2137
MAXIMUM TORQUE (SELECT ONE)	
(POUND-INCHES)	2141
(NEWTON METERS)	2143
BREAKAWAY TORQUE (SELECT ONE)	
(POUND-INCHES)	2131
(NEWTON METERS)	2145
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3075
PER DOCUMENT (DOC DES)	2151
TEST METHOD (DESIGNATION)	2153

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3089	LOCKING TORQUE (SELF-LOCKING NUTS). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3089.
2137	LOCKING TORQUE (SELF-LOCKING NUTS). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2141	THE LOCKING TORQUE SHALL BE NOT GREATER THAN 2141 POUND-INCHES.
2143	THE LOCKING TORQUE SHALL BE NOT GREATER THAN 2143 NEWTON METERS.
2131	THE BREAKAWAY TORQUE SHALL BE NOT LESS THAN 2131 POUND-INCHES.
2145	THE BREAKAWAY TORQUE SHALL BE NOT LESS THAN 2145 NEWTON METERS.
3075	LOCKING TORQUE (SELF-LOCKING NUTS). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3075.
2151	LOCKING TORQUE (SELF-LOCKING NUTS). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2151.
2153	TEST METHOD 2153 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAGNETIC PERMEABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3152
MAXIMUM PERMEABILITY (MU)	3154
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3156
PER MIL-I-17214.	3158
PREVAILING TORQUE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3117
PER MIL-N-45913 LIMITS.	2155
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3103
PER MIL-N-45913.	2157
PROOF LOAD	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1893

Source: https://assist.dla.mil -- Downloaded: 20261O-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3152	MAGNETIC PERMEABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3152.
3154	MAGNETIC PERMEABILITY. THE MAGNETIC PERMEABILITY SHALL BE NOT GREATER THAN 3154 MU.
3156	MAGNETIC PERMEABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3156.
3158	MAGNETIC PERMEABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-I-17214.
3117	PREVAILING TORQUE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3117.
2155	PREVAILING TORQUE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE LIMITS SPECIFIED IN MIL-N-45913.
3103	PREVAILING TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3103.
2157	PREVAILING TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-N-45913.
1893	PROOF LOAD. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1893.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PROOF LOAD (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	1897
NO PERMANENT DEFORMATION, CRACKS, OR OTHER FAILURE.	1899
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1873
PER DOCUMENT (DOC DES)	1886
RESISTANCE TO CHEMICAL REAGENTS (NONMETALLIC)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2088
AS FOLLOWS:	2083
NO EVIDENCE OF DEGRADATION OR PERMANENT DISCOLORATION.	2092
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2094

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1897	PROOF LOAD. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1899	THERE SHALL BE NO PERMANENT DEFORMATION, CRACKS, OR OTHER FAILURE.
1873	PROOF LOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1873.
1886	PROOF LOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1886.
2088	RESISTANCE TO CHEMICAL REAGENTS (NONMETALLIC). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2088.
2083	RESISTANCE TO CHEMICAL REAGENTS (NONMETALLIC). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2092	THERE SHALL BE NO EVIDENCE OF DEGRADATION OR PERMANENT DISCOLORATION.
2094	RESISTANCE TO CHEMICAL REAGENTS (NONMETALLIC). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2094.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO CHEMICAL REAGENTS (NONMETALLIC) (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-406, METHOD 7011.	2096
REAGENTS (NAME)	2098
RESISTANCE TO REMOVAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1923
AS FOLLOWS:	2101
MINIMUM PUSHOUT FORCE (SELECT ONE)	
(POUNDS)	2105
(KILOGRAMS)	2107
MINIMUM PULLOUT FORCE (SELECT ONE)	
(POUNDS)	2111
(KILOGRAMS)	2113
MINIMUM TORQUEOUT FORCE (SELECT ONE)	
(POUND-INCHES)	2117
(NEWTON METERS)	2119

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2096	RESISTANCE TO CHEMICAL REAGENTS (NONMETALLIC). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 7011 OF MIL-STD-406.
2098	THE CHEMICAL REAGENT(S) SHALL BE 2098.
1923	RESISTANCE TO REMOVAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1923.
2101	RESISTANCE TO REMOVAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2105	THE PUSHOUT FORCE SHALL BE NOT LESS THAN 2105 POUND(S).
2107	THE PUSHOUT FORCE SHALL BE NOT LESS THAN 2107 KILOGRAMS.
2111	THE PULLOUT FORCE SHALL BE NOT LESS THAN 2111 POUND(S).
2113	THE PULLOUT FORCE SHALL BE NOT LESS THAN 2113 KILOGRAMS.
2117	THE TORQUEOUT FORCE SHALL BE NOT LESS THAN 2117 POUND-INCH(S).
2119	THE TORQUEOUT FORCE SHALL BE NOT LESS THAN 2119 NEWTON METERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO REMOVAL (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1907
PER DOCUMENT (DOC DES)	1912
SALT SPRAY/FOG	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6356
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE.	6357
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6353
PER ASTMB117.	6354
EXPOSURE PERIOD (HOURS)	4783
STRESS CORROSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2075

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1907	RESISTANCE TO REMOVAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1907.
1912	RESISTANCE TO REMOVAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1912.
6356	SALT SPRAY/FOG. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6356.
6357	SALT SPRAY/FOG. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
6353	SALT SPRAY/FOG. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6353.
6354	SALT SPRAY/FOG. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMB117.
4783	DURATION OF TEST SHALL BE 4783 HOUR(S).
2075	STRESS CORROSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2075.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STRESS CORROSION (CONT)	
REQUIREMENTS (CONT)	
NO DAMAGE OR CORROSION.	2081
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2057
PER DOCUMENT (DOC DES)	3007
STRESS DURABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1989
NO DEFORMATION, CRACKS, OR EVIDENCE OF FAILURE.	2121
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1969
PER MIL-STD-1312, TEST 14.	2123
TEST LOADING METHOD ____	2125
TEST DURATION (HOURS)	2127
TEST TEMPERATURE (DEGREES CELSIUS)	2129

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2081	STRESS CORROSION. THERE SHALL BE NO EVIDENCE OF DAMAGE OR CORROSION.
2057	STRESS CORROSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2057.
3007	STRESS CORROSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3007.
1989	STRESS DURABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1989.
2121	STRESS DURABILITY. THERE SHALL BE NO DEFORMATION, CRACKS, OR EVIDENCE OF FAILURE.
1969	STRESS DURABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1969.
2123	STRESS DURABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH TEST 14 OF MIL-STD-1312.
2125	THE TEST LOADING METHOD SHALL BE 2125.
2127	THE TEST DURATION SHALL BE NOT LESS THAN 2127 HOURS.
2129	THE TEST TEMPERATURE SHALL BE 2129 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STRESS EMBRITTLEMENT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2043
NO EVIDENCE OF CRACKING.	2034
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2027
PER MIL-N-25027.	2036
MINIMUM TEST DURATION (HOURS)	2038
SURFACE ROUGHNESS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3271
AS FOLLOWS:	3281
MAXIMUM ROUGHNESS HEIGHT, ARITHMETICAL AVERAGE, OF NUT BEARING SURFACE (SELECT ONE)	
(MICROINCHES)	3287
(MICROMETERS)	3289

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2043	STRESS EMBRITTLEMENT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2043.
2034	STRESS EMBRITTLEMENT. THERE SHALL BE NO EVIDENCE OF CRACKING.
2027	STRESS EMBRITTLEMENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2027.
2036	STRESS EMBRITTLEMENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-N-20527.
2038	THE TEST DURATION SHALL BE NOT LESS THAN 2038 HOURS.
3271	SURFACE ROUGHNESS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3271.
3281	SURFACE ROUGHNESS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3287	THE ARITHMETICAL AVERAGE ROUGHNESS HEIGHT OF THE NUT BEARING SURFACE SHALL BE NOT GREATER THAN 3287 MICROINCHES.
3289	THE ARITHMETICAL AVERAGE ROUGHNESS HEIGHT OF THE NUT BEARING SURFACE SHALL BE NOT GREATER THAN 3289 MICROMETERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SURFACE ROUGHNESS (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM ROUGHNESS HEIGHT, ARITHMETICAL AVERAGE, OF NUT THREAD (SELECT ONE)	
(MICROINCHES)	3297
(MICROMETERS)	3299
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3251
PER DOCUMENT (DOC DES)	3253
TENSION FATIGUE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2179
THREAD AREA SHALL NOT FRACTURE.	2181
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2183

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3297	THE ARITHMETICAL AVERAGE ROUGHNESS HEIGHT OF THE NUT THREAD SHALL BE NOT GREATER THAN 3297 MICROINCHES.
3299	THE ARITHMETICAL AVERAGE ROUGHNESS HEIGHT OF THE NUT THREAD SHALL BE NOT GREATER THAN 3299 MICROMETERS.
3251	SURFACE ROUGHNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3251.
3253	SURFACE ROUGHNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3253.
2179	TENSION FATIGUE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2179.
2181	TENSION FATIGUE. THERE SHALL BE NO LOAD LOSS DUE TO THREAD FRACTURE.
2183	TENSION FATIGUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2183.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TENSION FATIGUE (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-1312, TEST 11.	2185
TEST LOAD (SELECT ONE)	
(POUNDS)	2187
(NEWTONS)	2189
TEST DURATION	
(HOURS)	2191
THICKNESS OF METALLIC COATING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2103
NOTE: REQUIREMENTS FOR PLATING THICKNESS AND OTHER PARAMETERS MAY BE SPECIFIED IN THE FINISH TABLE IN DOD-STD-35, TABLE IX.	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2109
PER MIL-STD-1312, TEST 12.	3111

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2185	TENSION FATIGUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH TEST 11 OF MIL-STD-1312.
2187	THE TEST LOAD SHALL BE 2187 POUNDS.
2189	THE TEST LOAD SHALL BE 2189 NEWTONS.
2191	THE TEST DURATION SHALL BE 2191 HOURS.
2103	THICKNESS OF METALLIC COATING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2103.
2109	THICKNESS OF METALLIC COATING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2109.
3111	THICKNESS OF METALLIC COATING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH TEST 12 OF MIL-STD-1312.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THICKNESS OF METALLIC COATING (CONT)	
PER MIL-STD-1312, TEST 12. (CONT)	
METHODS (SELECT ONE)	
DROP.	2139
MAGNETIC.	2193
EDDY CURRENT.	2195
MICROSCOPIC.	2197
DIMENSIONAL CHANGE.	2199
ANODIC DISSOLUTION.	1931
STRIP AND WEIGH.	1933
VIBRATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4681
AS FOLLOWS:	2159
NO EVIDENCE OF FAILURE.	2161
MAXIMUM ROTATION BETWEEN NUT AND BOLT (DEGREES)	2163
NO REMOVAL OR INSTALLATION WITH FINGERS.	2165

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2139	THE DROP METHOD SHALL BE USED.
2193	THE MAGNETIC METHOD SHALL BE USED.
2195	THE EDDY CURRENT METHOD SHALL BE USED.
2197	THE MICROSCOPIC METHOD SHALL BE USED.
2199	THE DIMENSIONAL CHANGE METHOD SHALL BE USED.
1931	THE ANODIC DISSOLUTION METHOD SHALL BE USED.
1933	THE STRIP AND WEIGH METHOD SHALL BE USED.
4681	VIBRATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4681.
2159	VIBRATION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2161	THERE SHALL BE NO EVIDENCE OF FAILURE.
2163	ROTATION BETWEEN NUT AND BOLT SHALL BE NOT GREATER THAN 2163 DEGREES.
2165	THERE SHALL BE NO REMOVAL OR INSTALLATION OF NUT WITH FINGERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1505
PER MIL-STD-1312, TEST 7.	2167
CLAMP TORQUE (SELECT ONE)	
(POUND-INCHES)	2169
(NEWTON METERS)	2171
BAKE TEMPERATURE (DEGREES CELSIUS)	2173
TEST DURATION (HOURS)	2175
WRENCH TORQUE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3061
NO DEFORMATION OF WRENCHING SURFACE.	2133
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3045
PER DOCUMENT (DOC DES)	2135

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
1505	VIBRATION. TESTING SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1505.
2167	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH TEST 7 OF MIL-STD-1312.
2169	THE CLAMP TORQUE SHALL BE 2169 POUND-INCHES.
2171	THE CLAMP TORQUE SHALL BE 2171 NEWTON METERS.
2173	THE BAKE TEMPERATURE SHALL BE 2173 DEGREES CELSIUS.
2175	THE TEST DURATION SHALL BE 2175 HOURS.
3061	WRENCH TORQUE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3061.
2133	WRENCH TORQUE. THERE SHALL BE NO DEFORMATION OF WRENCHING SURFACE.
3045	WRENCH TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3045.
2135	WRENCH TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2135.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-130.	7629
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI


(Project EDS-A259)


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX A

ILLUSTRATIONS


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

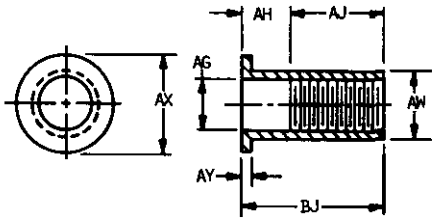





INSTALLATION

156-01-1

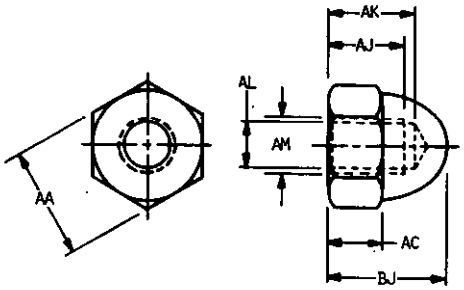


156-01-2



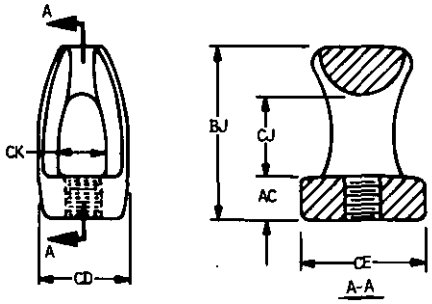


156-01-6

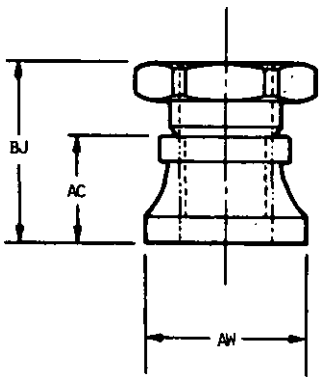



156-01-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

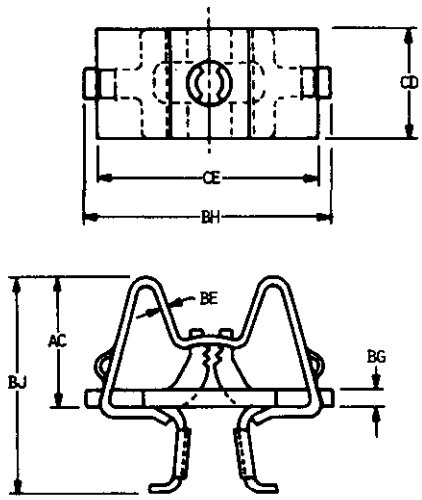


156-01-14

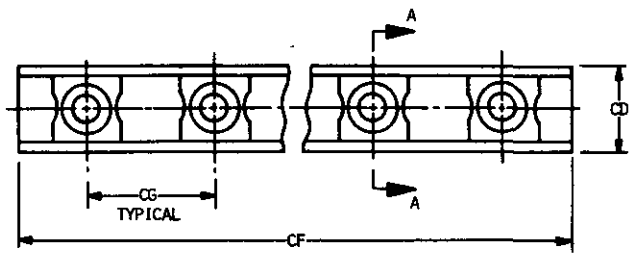




156-01-11


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

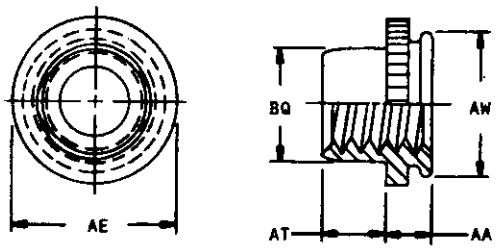

156-01-29

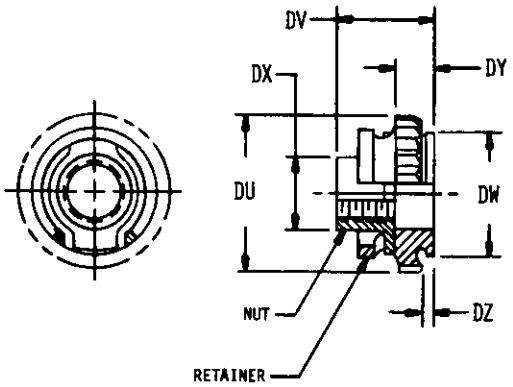

156-04-2

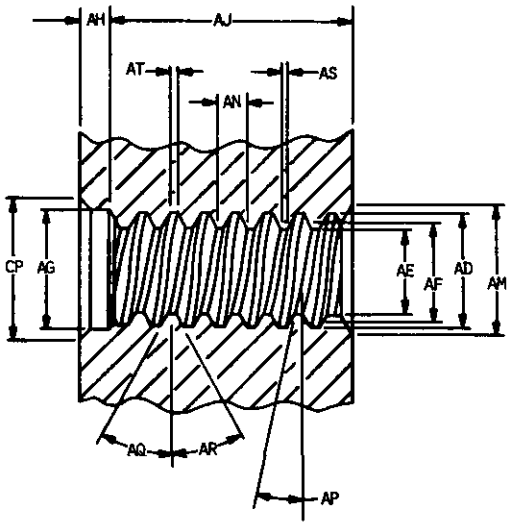

156-05-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	26	1989	66	2137	56	2223	36
0102	26	1995	52	2139	74	2225	36
0103	26	1996	52	2141	56	2227	36
0104	26	1998	52	2143	56	2229	36
0105	26	2011	52	2145	56	2231	36
0107	28	2021	52	2151	56	2233	38
0108	28	2023	52	2153	56	2235	38
0700	26	2026	52	2155	58	2237	38
0800	26	2027	68	2157	58	2239	38
1003	26	2028	52	2159	74	2241	38
1004	26	2034	68	2161	74	2243	38
1005	26	2036	68	2163	74	2245	38
1006	26	2038	68	2165	74	2247	38
1038	26	2043	68	2167	76	2249	38
1009	32	2057	66	2169	76	2251	38
1505	76	2075	64	2171	76	2253	38
1831	46	2081	66	2173	76	2255	40
1834	46	2083	60	2175	76	2257	40
1853	44	2088	60	2179	70	2259	40
1856	44	2092	60	2181	70	2261	40
1858	44	2094	60	2183	70	2263	30
1861	44	2096	62	2185	72	2265	34
1863	46	2098	62	2187	72	2267	34
1865	46	2101	62	2189	72	2269	36
1873	60	2103	72	2191	72	2271	36
1886	50	2105	62	2193	74	3003	46
1893	58	2107	62	2195	74	3007	66
1897	60	2109	72	2197	74	3009	46
1899	50	2111	62	2199	74	3027	46
1907	64	2113	62	2201	30	3037	48
1912	64	2117	62	2203	30	3045	76
1923	62	2119	62	2205	30	3061	76
1931	74	2121	66	2207	30	3075	56
1933	74	2123	66	2209	34	3083	48
1941	54	2125	66	2211	36	3085	48
1945	54	2127	66	2213	36	3089	56
1955	52	2129	66	2215	36	3093	48
1958	52	2131	56	2217	36	3103	58
1969	66	2133	76	2219	36	3111	72
1988	52	2135	76	2221	36	3117	58

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3121	48	6356	64	7578	32		
3123	48	6357	64	7580	34		
3125	48	6369	26	7629	78		
3127	50	6372	78				
3131	50	6870	78				
3133	50	6873	26				
3135	48	6874	28				
3141	54	6941	28				
3143	54	6942	28				
3152	58	6991	78				
3154	58	6992	78				
3156	58	6993	78				
3158	58	6994	78				
3159	54	6995	78				
3181	54	6996	42				
3183	54	6997	42				
3185	54	6998	42				
3192	54	6999	42				
3194	54	7001	78				
3243	50	7002	78				
3251	70	7003	78				
3253	70	7004	78				
3255	50	7005	78				
3259	50	7021	40				
3263	50	7022	40				
3265	50	7023	40				
3267	50	7024	40				
3271	68	7035	44				
3281	68	7036	44				
3287	68	7037	44				
3289	68	7038	44				
3297	70	7041	42				
3299	70	7042	42				
4681	74	7043	42				
4783	64	7044	42				
4904	30	7572	32				
4905	30	7573	32				
4950	32	7574	32				
6353	64	7576	32				
6354	64	7577	32				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Additional Part Marking	78
Additional Requirements	78
Aperture Cards Required	28
Applicable Documents	80
Axial Tensile Strength	44
Base Document	26
Bearing Surface	34
Carburization and Decarburization	46
Chemical Analysis	48
City, State, Zip	26
Class	30
Classification	30
Color	36
Company Name/Command	26
Concentricity	36
Configuration	30
Contract Number/Office Symbol	26
Control	26
Date	26
Design and Construction	34
Discontinuities	50
Embrittlement Relief	52
Finishes	34
Flattening	52
Format	26
Government Design Activity FSCM	26
Grade	30
Hardness	54
Illustrations	32
Knurling	36
Locking Torque (Self-Locking Nuts)	56

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Magnetic Permeability	58
Materials	34
Metals	34
Nomenclature	80
Notes	80
Packaging	80
Part Marking	78
Part Number	28
Part Number Cross-Reference	80
Phone Number	26
Prevailing Torque	58
Proof Load	58
Quality Assurance Provisions	80
Requester FSCM	26
Requester's Name	26
Resistance to Chemical Reagents (Nonmetallic)	60
Resistance to Removal	62
Revision of AEDPS Document (Number)	28
Salt Spray/Fog	64
Scope	28
Source Table	28
Street/Building	26
Stress Corrosion	64
Stress Durability	66
Stress Embrittlement	68
Style	30
Superseded Document	80
Surface Roughness	68
System Application	26
Tabulated Characteristics	32
Temperature Rating	30
Tension Fatigue	70
Thickness of Metallic Coating	72
Thread Designation	38
Thread Forming Method	38
Type	30
Units of Measure	28

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Vibration	74
Weight	40
Workmanship	78
Wrench Torque	76

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-22A(MI), dated 16 October 1978 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-22A(MI), dated 16 October 1978 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE DOD-STD 35-22A

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander,
U.S. Army Missile R & D Command,
ATTN: DRDMI-ESD,
Redstone Arsenal, Alabama 35809

FOLD

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currentversion before use.