DOD-STD-35-24A(MI)
15 December 1978
SUPERSEDING
MIL-STD-35-24(MI)
17 DECEMBER 1973

MILITARY STANDARD

BEARINGS

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

FSC EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Bearings
Automated Engineering
Document Preparation System

DOD-STD-35-24A(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-24A(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for Bearings.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35 and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	13
	2.1	Issues of documents	13
	2.2	Other publications	14
	3.	DEFINITIONS	17
	4.	GENERAL REQUIREMENTS	19
	4.1	Introduction	19
	4.2	Specification Requirement Sheet (SRS)	19
	4.3	Configuration	19
	4.3.1	Dimensions	19
	4.3.2	Illustrations	19
	4.4	Units of measure	19
	5.	DETAILED REQUIREMENTS	21
	5.1	Introduction	21
	5.2	MSE Formats	21
	5.3	Referenced documents	21
	5.4	Test matrix	21
	5.5	Tabulation	23
	5.6	Keyword Code Index (KCI) and Standard Paragraphs	25
	5.6.1	Interrelationship of Codes	25
	5.6.2	Automatic MSE Data	25
	5.6.3	DOD-STD-35 Tables	25

TABLES

Table	I.	Title Index	3
	II.	Test matrix	22
	III.	Tabulation candidates	23

APPENDICES

Appendix	A.	Illustrations	143
	B.	Characteristic Code Index	159
		Index	167

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for bearings.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included-in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for an MSE shall be selected from one of the E titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
BEARING, BALL, ANNULAR	112004	FF-B-171	GENERAL PURPOSE
		MIL-B-22227	MOTOR GENERATOR
		MS17107	TYPE I
		MS17108	TYPE II
		MIL-B-16129	OPEN TYPE FOR GYROSCOPES
		MIL-B-27931	QUIET OPERATION
		MIL-B-22446	HIGH GRADE
		MIL-B-81793	PRECISION
		MIL-B-83175	HIGH SPEED TURBINE ACFT
BEARING, BALL, ANNULAR, AIRFRAME, ANTIFRICTION	112001	MIL-B-7949	MINUS 65 DEG F TO 350 DEG F
		MS21428	EXTRA LIGHT DTY
		MS27640	HEAVY DUTY
		MS27641	INTMD DUTY
		MS27642	EXTRA LIGHT DTY
		MS27643	DOUBLE ROW HEAVY DUTY SELF-ALIGNING
		MS27644	DOUBLE ROW H D
		MS27645	LT AND HVY DTY, SELF-ALIGNING
		MS27646	EXTRA LIGHT DTY
		MS27647	EXTRA WIDE, DBL ROW, INTMD DUTY
		MS27648	EXTERNALLY SELF ALIGNING, EXTRA LIGHT DUTY
		MS27649	INTMD DUTY
BEARING, BALL, ANNULAR, DEEP GROOVE	112005	MIL-B-81793	PRCN FOR INSTR AND ROTATING COMPONENTS
BEARING, BALL, BELLCRANK	112002	MIL-B-6038	ANTIFRICTION AIRFRAME
		MS20218	
BEARING, BALL, DOUBLE ROW	112003	MIL-B-6039	ANTIFRICTION SEALED, ROD-END SELF ALIGNING

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
BEARING, BALL, DOUBLE ROW	112003 (CONT)	MS21150	PRECISION, SOLID SHANK TYPE I
		MS21151	PRECISION, EXTERNAL THREAD TYPE II
		MS21152	PRECISION, HOLLOW SHANK, TYPE III
		MS21153	PRECISION, INTERNAL THREAD SELF-ALIGNING, TYPE IV
		MS21154	PLAIN, GROOVED OUTER RING
BEARING, BALL, DUPLEX	112031	FF-B-171	FACE TO FACE, BACK TO BACK, OR TANDEM
BEARING, BALL, THRUST	112028	FF-B-171	GENERAL PURPOSE
BEARING, RADIAL BALL	112030	MIL-B-81793	PRCN CMPNTS
BEARING, ROLLER, CYLINDRICAL	112032	FF-B-185	GENERAL PURPOSE
BEARING, ROLLER, SELF-ALIGNING, AIRFRAME, ANTIFRICTION	112022	MIL-B-8914	AIRCRAFT CONTROL SYSTEMS
		MS28912	SINGLE ROW, SEALED, TYPE I
		MS28913	DOUBLE ROW, SEALED, TYPE II
		MS28914	DOUBLE ROW, WIDE INNER RACE SEALED TYPE III
		MS28915	DOUBLE ROW, TORQUE TUBE SEALED TYPE IV

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEx. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
BEARINGS, JEWEL SAPPHIRE OR RUBY, SYNTHETIC	112013	MIL-B-27497	PRECISION ITEMS
		MS27041	BAR HOLE
		MS27042	OLIVE HOLE, DOUBLE CUP
		MS27043	OLIVE HOLE, RINGSTONE
		MS27044	OLIVE HOLE RINGSTONE
		MS27045	VEE
		MS27046	CUP
		MS27047	ENDSTONE
		MS27048	OLIVE HOLE, SINGLE CUP
		MS27049	BAR HOLE, BOMBE
BEARINGS, PLAIN, ROD-END, TFE LINED, SELF-ALIGNING	112014	MIL-B-81935	SELF LUB MINUS 65 DEG F TO PLUS 325 DEG FAHRENHEIT
		MS21242	ROLLER, TYPE 1, EXT THD HD
		MS21243	ROLLER, TYPE 2, EXTERNAL THREAD HEAVY DUTY
BEARINGS, PLAIN, SELF-ALIGNING	112017	MIL-B-8942	TFE LINED
		MS21230	GROOVED OUTER RING, WIDE
		MS21231	WIDE
		MS21232	GROOVED OUTER RING, NARROW
		MS21233	NARROW
BEARINGS, PLAIN, SELF-ALIGNING, ALL METAL	112015	MIL-B-8976	AIRFRAME
		MS21154	GROOVED OUTER RING
		MS21155	PLAIN OUTER RING

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
BEARINGS, PLAIN, SELF-ALIGNING, ALL METAL	112015 (CONT)	MIL-B-81936	BE-CU, CRES RACE
		MIL-B-81820	SELF-LUBRICATING LOW SPEED
		MS14101	NARROW, GROOVED OUTER RING
		MS14102	WIDE, CHAMFERED OUTER RING
		MS14103	WIDE, GROOVED OUTER RING
		MS14104	NARROW, CHAM OUTER RING
BEARINGS, ROLLER	112019	MIL-B-18367	CYL, RADIAL AND THRUST, SPECIAL PRECISION
		MIL-B-38506	CYLINDRICAL, AN/FPS-35
BEARINGS, ROLLER, CYLINDRICAL AND BEARINGS, ROLLER, SELF-ALIGNING	112018	FF-B-185	CYLINDRICAL AND SELF-ALIGNING
		MS19073	SINGLE ROW WITH INNER RING RET RIBS, OUTER RING RET SNAP RINGS, NON LOCATING
		MS19074	CYL OUTER RING
		MS19075	CYL INNER RING, TWO RET RIBS ON OUTER RING, ONE DIR LOCATING
		MS19076	NON-LOCATING
		MS19077	OUTER RING RET RIB, DIRECTION LOCATING
		MS19078	INNER RING RET RIB ONE DIR LOCATING
		MS19079	TWO DIRECTION LOCATING

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE 1. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
BEARINGS, ROLLER, NEEDLE	112020	MIL-B-3990	AIRFRAME, ANTIFRICTION,
		MS21432	TRACK ROLLER INTEGRAL STUD, TYPE VIII
		MS24461	SINGLE ROW, HVY DTY, TYP I
		MS24462	THIN SHELL, TYPE II
		MS24463	SLFALIGNG, HVY DUTY, TYP III
		MS24464	DOUBLE ROW, HVY DTY, TYPE IV, SELF-ALIGNING
		MS24465	SINGLE ROW, HVY DTY, TRACK ROLLER, TYPE V
		MS24466	DOUBLE ROW, TYP VI, TRACK RLR
BEARINGS, ROLLER, ROD-END	112021	MIL-B-8952	ANTIFRICTION, SELF ALIGNING
		MS21220	INTERNAL THREAD HVY DTY, TYPE 2
		MS21221	EXTERNAL THREAD HVY DTY, TYPE 1
		MS21223	EXTERNAL THREAD HVY DTY, TYPE 2
BEARINGS, ROLLER, TAPERED	112024	FF-B-187	GENERAL PURPOSE
		MS19081	SINGLE ROW NORMAL ANGLE
		MS19082	NORMAL ANGLE
		MS19083	STEEP ANGLE
		MS19084	STEEP ANGLE, FLANGED CUP
		MS19085	TWO ROWS, NORMAL ANGLE, ONE DOUBLE CONE, TWO SINGLE CUPS
		MS19086	TWO SINGLE CONES
		MS19087	STEEP ANGLE, ONE DOUBLE CUP

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
BEARINGS, ROLLER, TAPERED	112024 (CONT)	MS19088	NORMAL ANGLE, NON-ADJUSTABLE
		MS19089	STEEP ANGLE
BEARINGS, ROLLER, THRUST	112023	MIL-B-17380	CYLINDRICAL ROLLERS
BEARINGS, SLEEVE	112025	MIL-B-81934	PLAIN AND FLGD, SELF LUB
		MS21240	PLAIN TFE LINED
		MS21241	FLANGED, TFE LINED
		MIL-B-13506	STEEL BACKED
BEARINGS, SLEEVE, (BRONZE, PLAIN OR FLANGED)	112027	FF-B-195	TUBULAR-SHAPED
		MS13824	FLANGED, 2 X 1-25/64 INCHES
		MS13825	FLANGED, 1-3/4 X 1-13/32 INCHS
		MS13826	FLANGED, 1-5/8 X 1-3/16 INCHES
		MS13828	PLAIN, 2 X 1-7/32 INCHES
		MS13829	PLAIN, 2 X 1-1/8 INCHES
		MS13830	PLAIN, 1-3/4 X 1-7/16 INCHES
		MS13831	PLAIN, 1-5/8 X 1-3/64 INCHES
		MS13834	PLAIN, 1-9/16 X 1 INCHES
		MS13835	PLAIN, 1-7/16 X 7/8 INCHES
		MS13836	PLAIN, 1-1/2 X 3/4 INCHES
		MS13837	PLAIN, 1-7/16 X 1 INCHES
		MS13852	FLANGED, 3-3/4 X 3-3/4 INCHES
		MS13853	FLANGED, 3-3/4 X 3 INCHES
		MS13854	FLANGED, 3-3/4 X 1-21/32 INCHS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
BEARINGS, SLEEVE, (BRONZE, PLAIN OR FLANGED)	112027 (CONT)	MS13855	PLAIN, 3-3/4 X 2-27/32 INCHES
		MS13856	PLAIN, 3-3/4 X 2-1/8 INCHES
		MS13857	PLAIN, 3-3/4 X 1-3/4 INCHES
		MS13858	PLAIN, 3-3/4 X 1-25/64 INCHES
		MS13859	PLAIN, 3-1/2 X 2-5/32 INCHES
		MS13860	PLAIN, 3-1/4 X 2 INCHES
		MS13861	PLAIN, 3-1/4 X 1-23/32 INCHES
		MS13862	PLAIN, 3-1/4 X 1-7/16 INCHES
		MS13891	FLANGED, 3-1/2 X 3-1/2 INCHES
		MS13892	FLANGED, 3-1/2 X 1-15/16 INS
		MS13893	FLANGED, 3-1/4 X 2-15/16 INS
		MS13894	FLANGED, 3-1/4 X 2-3/4 INCHES
		MS13895	FLANGED, 3-1/4 X 2-23/64 INS
		MS13896	FLANGED, 3-1/4 X 1-13/32 INS
		MS13897	FLANGED, 3 X 3-1/2 INCHES
		MS13898	FLANGED, 3 X 2-15/16 INCHES
		MS13899	BEARING, SLEEVE
		MS13900	PLAIN, 3-1/2 X 3-15/32 INCHES
		MS13901	PLAIN, 3-1/2 X 2-9/16 INCHES
		MS13902	PLAIN, 3-1/2 X 2-3/16 INCHES
		MS13903	PLAIN, 3-1/2 X 1-27/32 INCHES
		MS13904	PLAIN, 3-1/2 X 1-1/8 INCHES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
BEARINGS, SLEECE, (BRONZE, PLAIN OR FLANGED)	112027 (CONT)	MS13905	PLAIN, 3-1/2 X 1-11/16 INCHES
		MS13906	PLAIN, 3-1/4 X 2-9/16 INCHES
		MS13907	PLAIN, 3-1/4 X 2-1/16 INCHES
		MS13908	PLAIN, 3-1/4 X 1-13/16 INCHES
		MS13909	PLAIN, 3-1/4 X 1-1/2 INCHES
		MS13910	PLAIN, 3-1/4 X 1-9/64 INCHES
		MS13911	PLAIN, 3 X 2-1/2 INCHES
		MS13912	PLAIN, 3 X 2-1/4 INCHES
		MS13913	PLAIN, 3 X 1-5/8 INCHES
		MS13914	PLAIN, 3 X 1-3/8 INCHES
		MS13915	PLAIN, 3 X 1-1/8 INCHES
		MS13916	PLAIN, 3 X 1-15/16 INCHES
		MS13917	PLAIN, 3 X 1-3/4 INCHES
		MS13918	PLAIN, 3 X 1-3/8 INCHES
		MS13919	PLAIN, 2-3/4 X 2-7/16 INCHES
		MS13920	PLAIN, 2-3/4 X 2 INCHES
		MS13921	PLAIN, 2-3/4 X 1-23/32 INCHES
		MS13922	PLAIN, 2-3/4 X 1-1/2 INCHES
		MS13923	PLAIN, 2-3/4 X 1-1/4 INCHES
		MS13924	PLAIN, 2-9/16 X 2-7/32 INCHS
		MS13925	PLAIN, 2-9/16 X 1-23/32 INCHES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
BEARINGS, SLEEVE, (BRONZE, PLAIN OR FLANGED)	112027 (CONT)	MS13926	PLAIN, 2-9/16 X 1-29/64 INCHES
		MS13927	PLAIN, 2-1/2 X 1-1/4 INCHES
		MS13963	PISTON PIN
		MS13964	FLANGED, 2-7/8 X 3-1/4 INCH
		MS13965	FLANGED, 2-7/8 X 2-1/4 INCHES
		MS13966	FLANGED, 2-5/8 X 2-3/4 INCHES
		MS13967	FLANGED, 2-5/8 X 1-5/8 INCHES
		MS13968	FLANGED, 2-5/8 X 1-1/8 INCHES
		MS13969	FLANGED, 2-1/2 X 1-7/8 INCHES
		MS13970	FLANGED, 2-1/2 X 1-3/8 INCHES
		MS13971	FLANGED, 2-1/2 X 1-5/16 INCHES
		MS13972	FLANGED, 2-1/4 X 1-7/8 INCHES
		MS13973	FLANGED, 2-1/4 X 1-5/8 INCHES
		MS13974	FLANGED, 2-1/4 X 1-3/8 INCHES
		MS13975	FLANGED, 2-1/16 X 1-5/8
		MS13976	PLAIN, 2-7/8 X 1-15/16 INCHES
		MS13977	PLAIN, 2-7/8 X 1-9/16 INCHES
		MS13978	PLAIN, 2-7/8 X 1-5/32 INCHES
		MS13979	PLAIN, 2-5/8 X 2-7/16 INCHES
		MS13980	PLAIN, 2-5/8 X 1-31/32 INCHES
		MS13981	PLAIN, 2-5/8 X 1-19/32 INCHES
		MS13982	PLAIN, 2-5/8 X 1-1/4 INCHES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT).

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
BEARINGS, SLEEVE, (BRONZE, PLAIN OR FLANGED)	112027 (CONT)	MS13983	PLAIN, 2-5/8 X 31/32 INCHES
		MS13984	PLAIN, 2-1/2 X 1-11/16 INCHES
		MS13985	PLAIN, 2-1/2 X 1-5/16 INCHES
		MS13986	PLAIN, 2-1/2 X 1-1/16 INCHES
		MS13987	PLAIN, 2-1/4 X 1-5/8 INCHES
		MS13988	PLAIN, 2-1/4 X 1-5/16 INCHES
		MS13989	PLAIN, 2-1/4 X 1-1/16 INCHES
		MS13990	PLAIN, 2-1/16 X 1-3/8 INCHES
		MS13991	PLAIN, 2-1/4 X 1-3/8 INCHES
		MS13992	PLAIN, 2-1/4 X 13/16 INCHES
		MS13993	PLAIN, 2-1/8 X 1-3/16 INCHES
		MS13994	PLAIN, 2-1/16 X 1-1/16 INCHES
		MS13995	PLAIN, 1-13/16 X 1 INCH

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

FEDERAL

FF-B-171	Bearings, Ball, Annular (General Purpose)
FF-B-185	Bearings, Roller, Cylindrical; and Bearings, Roller, Self-Aligning
FF-B-195	Bearing, Sleeve, (Bronze, Plain, or Flanged)

MILITARY

MIL-B-3990	Bearing, Roller, Needle, Airframe Anti Friction
MIL-B-6038	Bearing, Ball, Bellcrank, Anti-Friction, Airframe
MIL-B-6039	Bearing, Double Row, Ball, Sealed, Rod End, Anti-Friction, Self-Aligning
MIL-B-7949	Bearings, Ball Airframe Anti Friction
MIL-B-8914	Bearing, Roller, Self-Aligning, Airframe, Anti-friction
MIL-B-8942	Bearings, Plain, TFE Lined, Self-Aligning
MIL-B-8948	Bearing, Plain, Rod End, TFE Lined, Self-Aligning
MIL-B-8952	Bearing, Roller, Rod End, Anti Friction, Self-Aligning
MIL-B-8976	Bearing, Plain, Self-Aligning, All-Metal
MIL-B-13506	Bearing, Sleeve (Steel Backed)
MIL-B-17931	Bearing, Ball, Annular, For Quiet Operation
MIL-B-18367	Bearings, Roller, Cylindrical, Radial and Thrust, Special Precision
MIL-B-81819	Bearing, Plain, Self-Lubricating, Self-Aligning, High Speed Oscillation

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

MIL-B-81820	Bearing, Plain, Self-Aligning, Self-Lubricating, Low Speed Oscillation
MIL-B-81934	Bearing, Sleeve, Plain and Flanged, Self-Lubricating
MIL-B-81935	Bearings, Plain, Rod End, Self-Aligning, Self-Lubricating
MIL-B-81936	Bearings, Self-Aligning, (BeCu, Cres Race)

STANDARDS

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-130	Identification Marking of Military Property
MIL-STD-206	Friction Torque Testing for Instrument Ball Bearings. Parts 1 and 2
MIL-STD-810	Environmental Test Methods
MIL-STD-1523	Age Control of Age-Sensitive Elastomeric Materials

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTMD256	Impact Resistance of Plastics and Electrical Insulating Materials, Methods of Test For
ASTMD638	Tensile Properties of Plastics , Test For
ASTMD695	Compressive Properties of Rigid Plastics, Test For
ASTMD732	Shear Strength of Plastics, Standard Method of Test For
ASTMD790	Flexural Properties of Plastics, Test For

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

ASTME380 Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, PA 19103.)

ANSIB46.1 Surface Texture

(Application for copies should be addressed to the American National Standards Institute, Inc., 1430 Broadway, New York, NY 10018.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Bearings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for Bearings, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Bearings.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Bearings.

4.3.2 Illustrations. Illustrations applicable to Bearings are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has a capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Test matrix. A test matrix is supplied as a guide for selecting documents to specify tests (see table II). The test matrix presents documents most applicable for use to satisfy the statement "TEST PER (DOC DES)". Any document listed in the Title Index may be used to satisfy the statement. However, the selected document from the Title Index must contain the desired test. Government test method documents and approved industry standards such as ASTM test methods may also be used to satisfy the statement "TEST PER (DOC DES)".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE II. TEST MATRIX.

DOCUMENT	CODE	2023	1994	2122	2152	2192	2332	2422	2462	1981	2009	1942	2522	2672	2712
	TEST	Axial Internal Play	Axial Strength Limit Load	Static Fracture Load	Bond Integrity	Conformity	Fluid Compatibility	No-Load Breakaway Torque	Oscillation Radial Load	Radial Dynamic Load	Radial Internal Play	Radial Strength Limit Load	Radial Static Fracture Load	Stability	Surface Concentricity
FF-B-171															X
FF-B-185															X
FF-B-195															X
MIL-B-3990			X	X							X			X	
MIL-B-6038		X									X		X		
MIL-B-6039										X	X	X	X		
MIL-B-7949			X	X						X	X	X	X	X	
MIL-B-8914		X	X	X							X	X	X		
MIL-B-8942				X			X	X	X						
MIL-B-8952										X	X	X	X		
MIL-B-8976											X	X			
MIL-B-13506					X										
MIL-B-17931											X				
MIL-B-81819			X			X	X								
MIL-B-81820			X		X	X		X	X			X			
MIL-B-81934							X		X			X			
MIL-B-81935			X	X				X							
MIL-B-81936			X								X				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

5.5 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table III provides codes for column headings which may be used for bearing characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

TABLE III. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1620	AXIAL LOAD RTG POUNDS	1622	AXIAL LOAD RATING (N)	1654	THR LIM LD RTG POUNDS
1656	THR LIM LD RATING (N)	1658	RDL LIM LD RTG POUNDS	1660	RDL LIM LD RATING (N)
1662	EQUIV LOAD POUNDS	1664	EQUIV LOAD NEWTONS	1674	ROLLER COMPLEMENT
1562	MAX RDL RO INNER RACE INCH	1564	MAX RDL RO INNER RACE MILLIMETER	1619	MAX RDL RO OUTER RACE INCH
1621	MAX RDL RO OUTER RACE MILLIMETER	1570	MAX PRLSM OF SIDES INNER RACE INCH	1572	MAX PRLSM OF SIDES INNER RACE MILLIMETER
1574	MAX PRLSM OF SIDES OUTER RACE INCH	1576	MAX PRLSM OF SIDES OUTER RACE MILLIMETER	1580	MAX SIDE RO WITH BORE INNER RACE INCH
1582	MAX SI RO WITH BORE INNER RACE MILLIMETER	1584	MAX OD SQ WITH SIDE RO INCH	1586	MAX OD SQ WITH SI RO MILLIMETER
1588	MAX RCWY RO W/SIDE INNER RACE INCH	1590	MAX RCWY RO W/SIDE INNER RACE MILLIMETER	1592	MAX RCWY RO W/SIDE OUTER RACE INCH
1594	MAX RCWY RO W/SIDE OUTER RACE MILLIMETER	1596	MAX ROLLER ELEM CRCMF VARIATION INCH	1598	MAX ROLLER ELEM CRCMF VARIATION MILLIMETER

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES. (CONT)

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1670	MAX ROLLER LENGTH VAR INCH	1672	MAX ROLLER LENGTH VAR MILLIMETER	1755	ROD-END SCR THD EXTERNAL
1757	ROD-END SCR THD INTERNAL	1860	MAX END PLAY INCH	1862	MAX END PLAY MILLIMETER
1864	MAX RAD PLAY INCH	1866	MAX RAD PLAY (MM)	1676	BRG PRE-LOAD (LBS)
1678	BIG PRE-LOAD NEWTONS	7022	MAX WT PER UNIT OUNCES	7023	MAX WT PER UNIT POUNDS
7021	MAX WT PER UNIT GRAMS	7024	MAX WT PER UNIT KILOGRAMS	6996	NOM WT PER UNIT POUNDS
6997	NOM WT PER UNIT OUNCES	6998	NOM WT PER UNIT GRAMS	6999	NOM WT PER UNIT KILOGRAMS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

5.6 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes. to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page' presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.6.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.6.2 Automatic MSE data. Some statements, such as Altitude and Temperature will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.6.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*C0MPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1O06
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT	0700
ONE SECTION DOCUMENT	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:23Z
Check the source to verify that this is the currenversion before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 11006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	

SOURCE(S).

6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCIRBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6874 THE FOLLOWING SUGGESTED SOURCES SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).

0107

0108 0108.

SCOPE.

SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.

PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.

PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

6941 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.

6942 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION	
TYPE (DESIGNATION)	1600
CLASS (DESIGNATION)	1602
GRADE (DESIGNATION)	1604
COMPOSITION (DESIGNATION)	1606
RATINGS	
AXIAL LOAD RATING (SELECT ONE)	
(POUNDS)	1620
(NEWTONS)	1622
RADIAL LOAD RATING, BASED ON 90 DEGREE CYCLES	
OUTER CASE (I) (SELECT ONE)	
(POUNDS)	1624
*CYCLES (QUANTITY)	1626
(NEWTONS)	1628
*CYCLES (QUANTITY)	1630
INNER CASE (II) (SELECT ONE)	
(POUNDS)	1632
*CYCLES (QUANTITY)	1634
(NEWTONS)	1636
*CYCLES (QUANTITY)	1638

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CLASSIFICATION.
1600	TYPE. TYPE 1600 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1602	CLASS. CLASS 1602 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1604	GRADE. GRADE 1604 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1606	COMPOSITION. COMPOSITION 1606 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
	RATINGS.
	AXIAL LOAD RATING.
1620	THE AXIAL LOAD RATING SHALL BE 1620 POUND(S).
1622	THE AXIAL LOAD "RATING SHALL BE 1622 NEWTON(S).
	RADIAL LOAD RATING.
1624 1626	THE RADIAL LOAD RATING OF THE OUTER CASE SHALL BE 1624 POUNDS BASED ON 1626 COMPLETE 90 DEGREE CYCLES.
1628 1630	THE RADIAL LOAD RATING OF THE OUTER CASE SHALL BE 1628 NEWTONS BASED ON 1630 COMPLETE 90 DEGREE CYCLES.
1632 1634	THE RADIAL LOAD RATING OF THE INNER CASE SHALL BE 1632 POUNDS BASED ON 1634 COMPLETE 90 DEGREE CYCLES.
1636 1638	THE RADIAL LOAD RATING OF THE INNER CASE SHALL BE 1636 NEWTONS BASED ON 1638 COMPLETE 90 DEGREE CYCLES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RATINGS (CONT)	
RATED RADIAL CAPACITY, BASED ON HOURS AVERAGE LIFE	
CAPACITY (POUNDS)	1640
*AVERAGE LIFE (HOURS)	1642
*SPEED (REVOLUTIONS PER MINUTE)	1644
CAPACITY (NEWTONS)	1646
*AVERAGE LIFE (HOURS)	1648
*SPEED (REVOLUTIONS PER MINUTE)	1652
THRUST LIMIT LOAD RATING (SELECT ONE)	
(POUNDS)	1654
(NEWTONS)	1656
RADIAL LIMIT LOAD RATING (SELECT ONE)	
(POUNDS)	1658
(NEWTONS)	1660
EQUIVALENT LOAD (SELECT ONE)	
(POUNDS)	1662
(NEWTONS)	1664
TEMPERATURE	
MAXIMUM OPERATING (DEGREES CELSIUS)	6794
MAXIMUM NONOPERATING (DEGREES CELSIUS)	6795
MAXIMUM STORAGE (DEGREES CELSIUS)	6796

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

RATED RADIAL CAPACITY.

1640 THE RATED RADIAL CAPACITY SHALL BE 1640 POUND(S).
1642 BASED ON AN AVERAGE LIFE OF 1642 HOUR(S) AT A SPEED
1644 OF 1644 REVOLUTIONS PER MINUTE.

1646 THE RATED RADIAL CAPACITY SHALL BE 1646 NEWTON(S).
1648 BASED ON AN AVERAGE LIFE OF 1648 HOUR(S) AT A SPEED
1652 OF 1652 REVOLUTIONS PER MINUTE.

THRUST LIMIT LOAD RATING.

1654 THE THRUST LIMIT LOAD RATING SHALL BE 1654 POUND(S).

1656 THE THRUST LIMIT LOAD RATING SHALL BE 1656 NEWTON(S).

RADIAL LIMIT LOAD RATING.

1658 THE RADIAL LIMIT LOAD RATING SHALL BE 1658 POUND(S).

1660 THE RADIAL LIMIT LOAD RATING SHALL BE 1660 NEWTON(S).

EQUIVALENT LOAD.

1662 THE EQUIVALENT LOAD SHALL BE 1662 POUND(S).

1664 THE EQUIVALENT LOAD SHALL BE 1664 NEWTON(S).

6794 MAXIMUM OPERATING TEMPERATURE. THE OPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6794 DEGREES CELSIUS.

6795 MAXIMUM NONOPERATING TEMPERATURE. THE NONOPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6795 DEGREES CELSIUS.

6796 MAXIMUM STORAGE TEMPERATURE. THE STORAGE TEMPERATURE SHALL BE NOT GREATER THAN 6796 DEGREES CELSIUS,

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE (CONT)	
MAXIMUM SERVICE (DEGREES CELSIUS)	6797
MAXIMUM AMBIENT OPERATING (DEGREES CELSIUS)	6798
MINIMUM OPERATING (DEGREES CELSIUS)	6799
MINIMUM STORAGE (DEGREES CELSIUS)	6801
MINIMUM SERVICE (DEGREES CELSIUS)	6802
MINIMUM AMBIENT OPERATING (DEGREES CELSIUS)	6803
NOMINAL STORAGE (DEGREES CELSIUS)	6804
DESIGN RELIABILITY	
FAILURE RATE (PERCENT PER 1000 HOURS)	7025
CONFIDENCE LEVEL (PERCENT)	7026
RATING TEMPERATURE (DEGREES CELSIUS)	7029

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6797	MAXIMUM SERVICE TEMPERATURE. THE SERVICE TEMPERATURE SHALL BE NOT GREATER THAN 6797 DEGREES CELSIUS.
6798	MAXIMUM AMBIENT OPERATING TEMPERATURE. THE AMBIENT OPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6798 DEGREES CELSIUS.
6799	MINIMUM OPERATING TEMPERATURE. THE OPERATING TEMPERATURE SHALL BE NOT LESS THAN 6799 DEGREES CELSIUS.
6801	MINIMUM STORAGE TEMPERATURE. THE STORAGE TEMPERATURE SHALL SHALL BE NOT LESS THAN 6801 DEGREES CELSIUS.
6802	MINIMUM SERVICE TEMPERATURE. THE SERVICE TEMPERATURE SHALL BE NOT LESS THAN 6802 DEGREES CELSIUS.
6803	MINIMUM AMBIENT OPERATING TEMPERATURE. THE AMBIENT OPERATING TEMPERATURE SHALL BE LESS THAN 6803 DEGREES CELSIUS.
6804	NOMINAL STORAGE TEMPERATURE. THE STORAGE TEMPERATURE SHALL BE 6804 DEGREES CELSIUS,
	DESIGN RELIABILITY. THE ITEM(S) SHALL BE DESIGNED, USING MATERIALS AND MANUFACTURING PROCESSES CAPABLE OF MEETING THE FOLLOWING CONDITIONS:
7025	THE FAILURE RATE SHALL BE LESS THAN 7025 PERCENT PER 1000 HOURS.
7026	THE CONFIDENCE LEVEL SHALL BE 7026 PERCENT.
7029	THE DESIGN RELIABILITY SHALL BE AT A TEMPERATURE OF 7029 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STORAGE CONDITIONS	
(YEARS)	1529
CERTIFY MAXIMUM CURE DATE TO DELIVERY (QUARTERS)	4942
CERTIFY MINIMUM SHELF LIFE AFTER DELIVERY (QUARTERS)	4943
CERTIFY MAXIMUM MANUFACTURE DATE TO DELIVERY (QUARTERS)	4944
AGE LIMITATION PER MIL-STD-1523.	5209
PERFORMANCE CHARACTERISTICS (SEE TABLE XII, DOD-STD-35)	
NOTE : AUTOMATIC WHEN TABLE XII IS USED.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1529	ITEMS SHALL WITHSTAND 1529 YEARS OF STORAGE WHEN PROPERLY PRESERVED, PACKAGED AND MECHANICALLY PROTECTED WITHOUT REQUIRING MAJOR REPAIR.
4942	MANUFACTURER SHALL CERTIFY THAT THE CURE DATE SHALL BE NOT GREATER THAN 4942 QUARTERS PRIOR TO DELIVERY DATE.
4943	MANUFACTURER SHALL CERTIFY THAT THERE SHALL BE NOT LESS THAN 4943 QUARTERS OF SHELF LIFE AFTER DELIVERY.
4944	MANUFACTURER SHALL CERTIFY THAT THE DATE OF MANUFACTURE SHALL BE NOT GREATER THAN 4944 QUARTERS PRIOR TO DATE OF DELIVERY.
5209	AGE LIMITATIONS OF THE FINISHED PRODUCT SHALL BE IN ACCORDANCE WITH MIL-STD-1523.

PERFORMANCE CHARACTERISTICS. PERFORMANCE CHARACTERISTICS SHALL BE AS SHOWN IN THE PERFORMANCE CHARACTERISTICS TABLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1022
*UNITS (SELECT ONE)	
U.S. (SELECT ONE)	
(INCHES)	7572
(FEET)	7573
(YARDS)	7574
SI (SELECT ONE)	
(CENTIMETERS)	7576
(MILLIMETERS)	7577
(METERS)	7578
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950

NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7573	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED SHALL BE IN FEET OR DEGREES.
7574	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN YARDS OR DEGREES.
7576	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN CENTIMETERS OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
7578	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN METERS OR DEGREES.
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	
MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE IX IS USED.	
METALS	
DISSIMILAR METALS.	7580
DESIGN AND CONSTRUCTION	
MAXIMUM RADIAL RUNOUT	
INNER RACE (SELECT ONE)	
(INCH)	1562
(MILLIMETER)	1564

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

7580 METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.

DESIGN AND CONSTRUCTION.

MAXIMUM RADIAL RUNOUT.

1562 INNER RACE RADIAL RUNOUT SHALL BE NOT GREATER THAN 1562 INCH.

1564 INNER RACE RADIAL RUNOUT SHALL BE NOT GREATER THAN 1564 MILLIMETER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
MAXIMUM RADIAL RUNOUT (CONT)	
OUTER RACE (SELECT ONE)	
(INCH)	1619
(MILLIMETER)	1621
MAXIMUM PARALLELISM OF SIDES	
INNER RACE (SELECT ONE)	
(INCH)	1570
(MILLIMETER)	1572
OUTER RACE (SELECT ONE)	
(INCH)	1574
(MILLIMETER)	1576
MAXIMUM SIDE RUNOUT WITH BORE	
INNER RACE (SELECT ONE)	
(INCH)	1580
(MILLIMETER)	1582

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH
1619	OUTER RACE RADIAL RUNOUT SHALL BE NOT GREATER THAN 1619 INCH.	
1622	OUTER RACE RADIAL RUNOUT SHALL BE NOT GREATER THAN 1621 MILLIMETER.	
	MAXIMUM PARALLELISM OF SIDES.	
1570	INNER RACE PARALLELISM OF SIDES SHALL BE NOT GREATER THAN 1570 INCH.	
1572	INNER RACE-PARALLELISM OF SIDES SHALL BE NOT GREATER THAN 1572 MILLIMETER.	
1574	OUTER RACE PARALLELISM OF SIDES SHALL BE NOT GREATER THAN 1574 INCH.	
1576	OUTER RACE PARALLELISM OF SIDES SHALL BE NOT GREATER THAN 1576 MILLIMETER.	
	MAXIMUM SIDE RUNOUT WITH BORE.	
1580	INNER RACE SIDE RUNOUT WITH BORE SHALL BE NOT GREATER THAN 1580 INCH.	
1582	INNER RACE SIDE RUNOUT WITH BORE SHALL BE NOT GREATER THAN 1582 MILLIMETER.	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
MAXIMUM OUTSIDE DIAMETER SQUARE WITH SIDE RUNOUT	
OUTER RACE (SELECT ONE)	
(INCH)	1584
(MILLIMETER)	1586
MAXIMUM RACEWAY RUNOUT WITH SIDE	
INNER RACE (SELECT ONE)	
(INCH)	1588
(MILLIMETER)	1590
OUTER RACE (SELECT ONE)	
(INCH)	1592
(MILLIMETER)	1594
MAXIMUM ROLLING ELEMENT VARIATION	
CIRCUMFERENCE (SELECT ONE)	
(INCH)	1596
(MILLIMETER)	1598

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

MAXIMUM OUTSIDE DIAMETER SQUARE WITH SIDE RUNOUT.

1584 OUTER RACE OUTSIDE DIAMETER SQUARE WITH SIDE RUNOUT SHALL BE NOT GREATER THAN 1584 INCH.

1586 OUTER RACE OUTSIDE DIAMETER SQUARE WITH SIDE RUNOUT SHALL BE NOT GREATER THAN 1586 MILLIMETER.

MAXIMUM RACEWAY RUNOUT WITH SIDE.

1588 INNER RACE RACEWAY RUNOUT WITH SIDE SHALL BE NOT GREATER THAN 1588 INCH.

1590 INNER RACE RACEWAY RUNOUT WITH SIDE SHALL BE NOT GREATER THAN 1590 MILLIMETER.

1592 OUTER RACE RACEWAY RUNOUT WITH SIDE SHALL BE NOT GREATER THAN 1592 INCH.

1594 OUTER RACE RACEWAY RUNOUT WITH SIDE SHALL BE NOT GREATER THAN 1594 MILLIMETER.

MAXIMUM ROLLING ELEMENT VARIATION

1596 THE CIRCUMFERENCE VARIATION OF ROLLING ELEMENTS USED IN THE SAME BEARING SHALL BE NOT GREATER THAN 1596 INCH.

1598 THE CIRCUMFERENCE VARIATION OF ROLLING ELEMENTS USED IN THE SAME BEARING SHALL BE NOT GREATER THAN 1598 MILLIMETER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
MAXIMUM ROLLING ELEMENT VARIATION (CONT)	
LENGTH (SELECT ONE)	
(INCH)	1670
(MILLIMETER)	1672
ROLLER COMPLIMENT	
(QUANTITY OF ROLLERS)	1674
ROD-END SHANK SCREW THREADS	
EXTERNAL THREADS	
THREAD CALLOUT (DESIGNATION)	1755
THREAD DOCUMENT (DOC DES)	1756
INTERNAL THREADS	
THREAD CALLOUT (DESIGNATION)	1757
THREAD DOCUMENT (DOC DES)	1758
BALL COMPLIMENT (EQUALLY SPACED)	
(QUANTITY)	1760

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1670	THE LENGTH VARIATION OF ROLLING ELEMENTS USED IN THE SAME BEARING SHALL BE NOT GREATER THAN 1670 INCH.
1672	THE LENGTH VARIATION OF ROLLING ELEMENTS USED IN THE SAME BEARING SHALL BE NOT GREATER THAN 1672 MILLIMETER.
1674	ROLLER COMPLIMENT. THE QUANTITY OF ROLLERS IN THE BEARING SHALL BE 1674.
	ROD-END SHANK SCREW THREADS.
1755	THE EXTERNAL THREADS FOR THE ROD-END SHANK SCREW SHALL BE 1755.
1756	THE EXTERNAL THREADS SHALL BE IN ACCORDANCE WITH 1756.
1757	THE INTERNAL THREADS FOR THE ROD-END SHANK SCREW SHALL BE 1757.
1758	THE INTERNAL THREADS SHALL BE IN ACCORDANCE WITH 1758.
1760	BALL COMPLIMENT. THE BALL COMPLIMENT SHALL CONSIST OF 1760 EQUALLY SPACED BALLS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
BALL SIZE (SELECT ONE)	
(INCHES)	
(MILLIMETERS)	
BALL TOLERANCE CONFORMANCE (SELECT ONE)	
AFBMA GRADE (DESIGNATION)	1762
OTHER	1764
EARING PRECISION TOLERANCE (SELECT ONE)	
GRADE ABEC- (DESIGNATION)	1766
GRADE RBEC- (DESIGNATION)	1768
THER ____	1850
M TORQUE	1852
TING (MILLIGRAM-MILLIMETERS)	1854
NG (MILLIGRAM-MILLIMETERS)	1856
ND PLAY (SELECT ONE)	1858
TER)	1860
	1862



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	BALL SIZE.
1762	THE BALL SIZE SHALL BE 1762 INCH(S).
1764	THE BALL SIZE SHALL BE 1764 MILLIMETER(S).
	BALL TOLERANCE CONFORMANCE.
1766	THE BEARING BALLS SHALL CONFORM TO AFBMA GRADE 1766.
1768	THE BEARING BALLS SHALL CONFORM TO 1768.
	BEARING PRECISION TOLERANCE.
1850	THE BEARING TOLERANCES SHALL BE IN ACCORDANCE WITH ABEC- 1850.
1852	THE BEARING TOLERANCES SHALL BE IN ACCORDANCE WITH RBEC- 1852.
1854	THE BEARING TOLERANCES SHALL BE IN ACCORDANCE WITH 1854.
	MAXIMUM TORQUE.
1856	THE STARTING TORQUE SHALL BE NOT GREATER THAN 1856 MILLIGRAM-MILLIMETER(S).
1858	THE RUNNING TORQUE SHALL BE NOT GREATER THAN 1858 MILLIGRAM-MILLIMETER(S).
	MAXIMUM END PLAY.
1860	THE END PLAY SHALL BE NOT GREATER THAN 1860 INCH.
1862	THE END PLAY SHALL BE NOT GREATER THAN 1862 MILLIMETER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
MAXIMUM RADIAL PLAY (SELECT ONE)	
(INCH)	1864
(MILLIMETER)	1866
LUBRICATION OF VOIDS	
LUBRICANT _____	1722
LUBRICANT DOCUMENT (DOC DES)	1723
FILL LEVEL (PERCENT)	1724
SURFACE LUBRICATION	
COMPONENTS _____	4405
SURFACE _____	4406
LUBRICANT _____	4407
LUBRICANT DOCUMENT (DOC DES)	4408
PRE-LUBRICATED BEARINGS	
LUBRICANT _____	1726
BEARING CONTACT ANGLE (SELECT ONE)	
(DEGREES)	1666
OTHER _____	1668
BEARING PRELOAD (SELECT ONE)	
(POUNDS)	1676

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	MAXIMUM RADIAL PLAY.
1864	THE RADIAL PLAY SHALL BE NOT GREATER THAN 1864 INCH.
1866	THE REAIAL PLAY SHALL BE NOT GREATER THAN 1866 MILLIMETER.
	LUBRICATION OF VOIDS.
1722	LUBRICANT FOR BEARING VOIDS SHALL BE 1722.
1723	LUBRICANT SHALL BE IN ACCORDANCE WITH 1723.
1724	LUBRICANT SHALL BE FILLED TO 1724 PERCENT OF THE FULL LEVEL.
	SURFACE LUBRICATION.
4405	THE COMPONENT(S) LUBRICATED SHALL BE 4405.
4406	THE SURFACE(S) TO BE LUBRICATED SHALL BE 4406.
4497	THE SURFACE LUBRICANT SHALL BE 4407.
4408	THE SURFACE LUBRICANT SHALL BE IN ACCORDANCE WITH 4408.
1726	PRE-LUBRICATED BEARINGS. BEARINGS SHALL BE PRE-LUBRICATED WITH 1726.
	BEARING CONTACT ANGLE.
1666	THE BEARING CONTACT ANGLE SHALL BE 1666 DEGREES.
1668	THE BEARING CONTACT ANGLE SHALL BE 1668.
	BEARING PRE-LOAD.
1676	PRE-LOAD SHALL BE 1676 POUND(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
BEARING PRELOAD (CONT)	
(NEWTONS)	1678
MAXIMUM RACEWAY CURVATURE	
PERCENT OF BALL DIAMETER	
INNER RACE GROOVE (PERCENT)	1680
OUTER RACE GROOVE (PERCENT)	1682
WEIGHT	
MAXIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1678 PRE-LOAD SHALL BE 1678 Newton

MAXIMUM RACEWAY CURVATURE.

1680 THE INNER RACE GROOVE RADIUS SHALL BE NOT GREATER THAN 1680 PERCENT OF THE BALL DIAMETER.

1682 THE OUTER RACE GROOVE RADIUS SHALL BE NOT GREATER THAN 1682 PERCENT OF THE BALL DIAMETER.

7022 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).

7023 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).

7021 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).

7024 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
WEIGHT (CONT)	
NOMINAL WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	6996
(POUNDS)	6997
SI (SELECT ONE)	
(GRAMS)	6998
(KILOGRAMS)	6999
AXIAL INTERNAL PLAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1837
AS FOLLOWS:	1839
NO EVIDENCE THAT SMOOTHNESS OF OPERATION HAS LESSENED	1841
MAXIMUM AXIAL INTERNAL PLAY (SELECT ONE)	
(INCH)	1843
(MILLIMETER)	1845

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODESTANDARD PARAGRAPH

6996 NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6996 OUNCE(S).

6997 NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6997 POUND(S).

6998 NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6998 GRAM(S).

6999 NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6999 KILOGRAM(S).

1837 AXIAL INTERNAL PLAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1837.

1839 AXIAL INTERNAL PLAY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

1841 THERE SHALL BE NO EVIDENCE THAT SMOOTHNESS OF BEARING OPERATION HAS LESSENED.

1843 AXIAL INTERNAL PLAY SHALL BE NOT GREATER THAN 1843 INCH.

1845 AXIAL INTERNAL PLAY SHALL BE NOT GREATER THAN 1845 MILLIMETER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
AXIAL INTERNAL PLAY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2019
PER DOCUMENT (DOC DES)	2023
AXIAL TEST LOAD (SELECT ONE)	
(POUNDS)	2020
(NEWTONS)	2025
TEST LOAD SHALL BE APPLIED ALTERNATELY IN OPPOSITE DIRECTIONS.	2021
TEST TEMPERATURE (DEGREES CELSIUS)	2022
AXIAL STRENGTH LIMIT LOAD	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1816
AS FOLLOWS:	1818
NO EVIDENCE THAT SMOOTHNESS OF BEARING OPERATION HAS LESSENED.	
MAXIMUM PERMANENT DEFORMATION (SELECT ONE)	
(INCH)	1822

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2019 AXIAL INTERNAL PLAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2019.

2023 AXIAL INTERNAL PLAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 20230

2020 THE AXIAL TEST LOAD SHALL BE 2020 POUND(S).

2025 THE AXIAL TEST LOAD SHALL BE 2025 NEWTON(S).

2021 THE TEST LOAD SHALL BE APPLIED ALTERNATELY IN OPPOSITE DIRECTIONS.

2022 THE TEST TEMPERATURE SHALL BE 2022 DEGREES CELSIUS.

1816 AXIAL STRENGTH LIMIT LOAD. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1816.

1818 AXIAL STRENGTH LIMIT LOAD. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

1819 THERE SHALL BE NO EVIDENCE THAT SMOOTHNESS OF BEARING OPERATION HAS LESSENED.

1822 THE PERMANENT DEFORMATION SHALL BE NOT GREATER THAN 1822 INCH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
AXIAL STRENGTH LIMIT LOAD (CONT)	
MAXIMUM PERMANENT DEFORMATION (CONT)	
(MILLIMETER)	1824
MINIMUM AXIAL LIMIT LOAD (SELECT ONE)	
(POUNDS)	1821
(NEWTONS)	1826
MAXIMUM AXIAL PLAY FROM INITIAL MEASUREMENT (SELECT ONE)	
(INCH)	1823
(MILLIMETER)	1828
(PERCENT)	1830
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1995
PER DOCUMENT (DOC DES)	1994
PRELOAD (SELECT ONE)	
(POUNDS)	1996
(NEWTONS)	1997
PRELOAD DURATION (MINUTES)	1998

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1824 THE PERMANENT DEFORMATION SHALL BE NOT GREATER THAN 1824 Millimeter

1821 THE AXIAL LIMIT LOAD SHALL BE NOT LESS THAN 1821 POUND(S).

1826 THE AXIAL LIMIT LOAD SHALL BE NOT LESS THAN 1826 NEWTON(S).

1823 THE AXIAL PLAY FROM INITIAL MEASUREMENT SHALL BE NOT GREATER THAN 1823 INCH.

1828 THE AXIAL PLAY FROM INITIAL MEASUREMENT SHALL BE NOT GREATER THAN 1828 MILLIMETER.

1830 THE AXIAL PLAY SHALL BE NOT GREATER THAN 1830 PERCENT OF THE INITIAL Measurement

1995 AXIAL STRENGTH LIMIT LOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1995.

1994 AXIAL STRENGTH LIMIT LOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1994.

1996 THE PRELOAD SHALL BE 1996 POUND(S)o

1997 THE PRELOAD SHALL BE 1997 NEWTON(S).

1998 THE PRELOAD DURATION SHALL BE 1998 MINUTE(S),

Source: https://assist.dla.mil -- Downloaded: 2026t0-26T07:23Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
AXIAL STRENGTH LIMIT LOAD (CONT)	
PER DOCUMENT (CONT)	
TEST LOAD (SELECT ONE)	
(POUNDS)	2000
(NEWTONS)	2003
LOAD DURATION (MINUTES)	2001
AXIAL STRENGTH STATIC FRACTURE LOAD	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2100
AS FOLLOWS:	2102
NO EVIDENCE OF CRACKS OR FRACTURES.	2104
BEARING CAPABLE OF BEING TURNED BY HAND.	2106
RATED LIMITLOAD (SELECT ONE)	
(POUNDS)	2108
(NEWTONS)	2110
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2120
PER DOCUMENT (DOC DES)	2122

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2000 THE TEST LOAD SHALL BE 2000 POUND(S).

2003 THE TEST LOAD SHALL BE 2003 NEWTON(S).

2001 THE TEST LOAD DURATION SHALL BE 2001 MINUTE(S).

2300 AXIAL STRENGTH STATIC FRACTURE LOAD. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2100.

2102 AXIAL STRENGTH STATIC FRACTURE LOAD. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2104 THERE SHALL BE NO EVIDENCE OF CRACKS OR FRACTURES.

2106 THE BEARING SHALL BE CAPABLE OF BEING TURNED BY HAND.

2108 THE RATED LIMIT LOAD SHALL BE 2108 POUND(S),

2110 THE RATED LIMIT LOAD SHALL BE 2110 NEWTON(S).

2120 AXIAL STRENGTH STATIC FRACTURE LOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2120.

2122 AXIAL STRENGTH STATIC FRACTURE LOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2122.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
AXIAL STRENGTH STATIC FRACTURE LOAD (CONT)	
PER DOCUMENT (CONT)	
MINIMUM STATIC AXIAL LOAD (PERCENT OF RATED)	2124
TEST LOAD DURATION (MINUTES)	2126
BOND INTEGRITY (ADHESION)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2130
AS FOLLOWS:	2132
NO EVIDENCE OF SEPARATION OR FLAKING OF LINERS.	2134
NO VOIDS IN ADHESIVE BOND.	2136
NO EVIDENCE OF CONTAMINANTS, CRACKS OR BUBBLES IN LINER.	2138
ADHERENCE TO METALLIC SUBSTRATE (PERCENT)	2140
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2150
PER DOCUMENT (DOC DES)	2152

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2124	THE STATIC AXIAL LOAD SHALL BE NOT LESS THAN 2124 PERCENT OF RATED LOAD.
2126	THE TEST LOAD DURATION SHALL BE 2126 MINUTE(S).
2130	BOND INTEGRITY (ADHESION). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2130.
2132	BOND INTEGRITY (ADHESION). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2134	THERE SHALL BE NO EVIDENCE OF SEPARATION OR FLAKING OF LINERS.
2136	THERE SHALL BE NO VOIDS IN THE ADHESIVE BOND.
2138	THERE SHALL BE NO EVIDENCE OF CONTAMINANTS, CRACKS OR BUBBLES IN THE LINER.
2140	THE ADHERENCE TO THE METALLIC SUBSTRATE SHALL BE 2140 PERCENT OF THE CONTACT AREA.
2150	BOND INTEGRITY (ADHESION). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2150.
2152	BOND INTEGRITY (ADHESION). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2152.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
COMPRESSIVE STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	3420
AS FOLLOWS:	3422
MINIMUM COMPRESSIVE STRENGTH (SELECT ONE)	
(THOUSAND POUNDS PER SQUARE INCH)	3424
(MEGAPASCALS)	3426
TEST METHODS (SELECT ONE)	
PER BASE DOUCMENT EXCEPT _____	3440
PER ASTMD695.	3442
TEST LOAD (SELECT ONE)	
(POUNDS)	3444
(NEWTONS)	3446
CONFORMITY (SPHERICAL BEARINGS)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2160
AS FOLLOWS:	2162

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3420	COMPRESSIVE STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3420.
3422	COMPRESSIVE STRENGTH. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3424	COMPRESSIVE STRENGTH SHALL BE NOT LESS THAN 3424 THOUSAND POUNDS PER SQUARE INCH.
3426	COMPRESSIVE STRENGTH SHALL BE NOT LESS THAN 3426 MEGAPASCALS.
3440	COMPRESSIVE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3440.
3442	COMPRESSIVE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD695.
3444	TEST LOAD SHALL BE 3444 POUND(S).
3446	TEST LOAD SHALL BE 3446 NEWTON(S).
2160	CONFORMITY (SPHERICAL BEARINGS). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2160.
2162	CONFORMITY (SPHERICAL BEARINGS). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONFORMITY (SPHERICAL BEARINGS) (CONT)	
AS FOLLOWS: (CONT)	
THE LINER SURFACE CURVATURE SHALL BE GREATER THAN THE BALL RADIUS.	2164
(INCH)	2166
(MILLIMETER)	2168
MAXIMUM OVERFORMING AT OUTER TEN PERCENT OF RACE WIDTH (SELECT ONE)	
(INCH)	2170
TOLERANCE (INCH)	2172
(MILLIMETER)	2174
TOLERANCE (MILLIMETER)	2176
MINIMUM MID-POINT VARIATION TO OUTER TEN PERCENT OF RACE WIDTH (SELECT ONE)	
(INCH)	2178
(MILLIMETER)	2180
MAXIMUM CIRCUMFERENTIAL VARIATION (SELECT ONE)	
(INCH)	2182

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2166 THE LINER SURFACE CURVATURE SHALL BE GREATER THAN THE BALL RADIUS.

2166 THE VARIATION OF DISTANCE BETWEEN THE LINER SURFACE AND THE BALL RADIUS SHALL BE NOT GREATER THAN 2166 INCH.

2168 THE VARIATION OF DISTANCE BETWEEN THE LINER SURFACE AND THE BALL RADIUS SHALL BE NOT GREATER THAN 2168 MILLIMETER.

2170 THE OVERFORMING AT THE OUTER 10 PERCENT OF RACE WIDTH SHALL BE NOT GREATER THAN 2170 INCH.

2172 THE OVERFORMING TOLERANCE SHALL BE 2172 INCH.

2174 THE OVERFORMING AT THE OUTER 10 PERCENT OF RACE WIDTH SHALL BE NOT GREATER THAN 2174 MILLIMETER.

2176 THE OVERFORMING TOLERANCE SHALL BE 2176 MILLIMETER.

2178 THE MID-POINT VARIATION TO OUTER 10 PERCENT OF THE RACE WIDTH SHALL BE NOT LESS THAN 2178 INCH.

2180 THE MID-POINT VARIATION TO OUTER 10 PERCENT OF THE RACE WIDTH SHALL BE NOT LESS THAN 2180 MILLIMETER.

2182 THE CIRCUMFERENTIAL VARIATION SHALL BE NOT GREATER THAN 2182 INCH.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONFORMITY (SPHERICAL BEARINGS) (CONT)	
MAXIMUM CIRCUMFERENTIAL VARIATION (CONT)	
(MILLIMETER)	2184
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2190
PER DOCUMENT (DOC DES)	2192
USE OPTICAL COMPARATOR OR OTHER ACCURATE TECHNIQUE.	2194
DUST	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4724
AS FOLLOWS:	2200
NO EVIDENCE OF PHYSICAL DAMAGE.	2202
NO EVIDENCE OF DUST PENETRATION.	2204
NO DEGRADATION OF BEARING PERFORMANCE.	2206
MINIMUM RETENTION OF LUBRICANT BY WEIGHT (PERCENT)	2208

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2184	THE CIRCUMFERENTIAL VARIATION SHALL BE NOT GREATER THAN 2184 MILLIMETER.
2190	CONFORMITY (SPHERICAL BEARINGS). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2190.
2192	CONFORMITY (SPHERICAL BEARINGS). TESTING SHALL BE PERFORMED IN ACCORDANCE WTIH 2192.
2194	USE OPTICAL COMPARATOR OR OTHER ACCURATE TECHNIQUE TO MEASURE CONFORMITY.
4724	DUST. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4724.
2200	DUST. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2202	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2204	THERE SHALL BE NO EVIDENCE OF DUST PENETRATION.
2206	THERE SHALL BE NO DEGRADATION OF BEARING PERFORMANCE.
2208	THE LUBRICANT RETENTION SHALL BE NOT LESS THAN 2208 PERCENT BY WEIGHT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DUST (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4895
PER MIL-STD-810, METHOD 510.	4953
TEST SPECIMENS SHALL BE OPERATED DURING TEST STEP(S) (NUMBERS)	4872
*DuRATION OF OPERATION (HOURS)	6299
SPECIMEN ORIENTATION SHALL BE CHANGED DURING TEST.	1539
SECOND 6-HOUR TEST IMMEDIATELY FOLLOWING TEMPERATURE STABILIZATION IN STEP 2.	4956
STEP 2 AND STEP 3 TEMPERATURE (DEGREES CELSIUS)	4840
END WASHER PUSHOUT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2210
AS FOLLOWS:	2212
NO EVIDENCE OF END WASHER LOOSENESS OR SMOOTHNESS OF BEARING OPERATION HAS LESSENED.	2214

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4895 DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4895.

4953 DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 510 OF MIL-STD-810.

4872 ITEMS SHALL BE OPERATED DURING STEP(S) 4872.

6299 DURATION OF OPERATION SHALL BE 6299 HOUR(S).

1539 ORIENTATION SHALL BE CHANGED DURING THE TEST.

4956 THE SECOND 6-HOUR TEST SHALL BE PERFORMED IMMEDIATELY AFTER REACHING STABILIZATION IN STEP 2.

4840 THE TEMPERATURE SHALL BE 4840 DEGREES CELSIUS FOR STEPS 2 AND 3.

2210 END WASHER PUSHOUT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2210.

2212 END WASHER PUSHOUT. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2214 THERE SHALL BE NO EVIDENCE OF END WASHER LOOSENESS OR THAT SMOOTHNESS OF BEARING OPERATION HAS LESSENED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
END WASHER PUSHOUT (CONT)	
AS FOLLOWS: (CONT)	
MINIMUM PUSHOUT FORCE (SELECT ONE)	
(POUNDS)	
(NEWTONS)	2216
TEST METHODS (SELECT ONE)	2218
PER BASE DOCUMENT EXCEPT _____	
PER MIL-B-3990.	2230
TEST LOAD (SELECT ONE)	2232
(POUNDS)	
(NEWTONS)	2234
TEST DURATION (MINUTES)	2236
LEXURAL STRENGTH	2238
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	
AS FOLLOWS:	3460
MINIMUM FLEXURAL STRENGTH (SELECT ONE)	3462
(THOUSAND POUNDS PER SQUARE INCH)	
(MEGAPASCALS)	3464
	3466

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2216 THE PUSHOUT FORCE SHALL BE NOT LESS THAN 2216 POUND(S).

2218 THE PUSHOUT FORCE SHALL BE NOT LESS THAN 2218 NEWTON(S).

2230 END WASHER PUSHOUT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2230.

2232 END WASHER PUSHOUT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-B-3990.

2234 THE TEST LOAD SHALL BE 2234 POUND(S).

2236 THE TEST LOAD SHALL BE 2236 NEWTON(S).

2238 THE TEST DURATION SHALL BE 2238 MINUTE(S).

3460 FLEXURAL STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3460.

3462 FLEXURAL STRENGTH. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

3464 FLEXURAL STRENGTH SHALL BE NOT LESS THAN 3464 THOUSAND POUNDS PER SQUARE INCH.

3466 FLEXURAL STRENGTH SHALL BE NOT LESS THAN 3466 MEGAPASCALS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLEXURAL STRENGTH (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3480
PER ASTMD790.	3482
TEST LOAD (SELECT ONE)	
(POUNDS)	3484
(NEWTONS)	3486
FATIGUE LOAD (ROD END BEARINGS)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2250
AS FOLLOWS:	2252
NO EVIDENCE OF BEARING FAILURE AT SPECIFIED LOADS AND CYCLING.	2254
MINIMUM CYCLES (QUANTITY)	2256
MINIMUM LOAD (PERCENT OF FATIGUE LOAD)	2258
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2260

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

3480 FLEXURAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH BASE DOCUMENT, EXCEPT 3480.

3482 FLEXURAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD790.

3484 TEST LOAD SHALL BE 3484 POUND(S).

3486 TEST LOAD SHALL BE 3486 Newtons

2250 FATIGUE LOAD (ROD-END BEARINGS). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2250.

2252 FATIGUE LOAD (ROD-END BEARINGS). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2254 THERE SHALL BE NO EVIDENCE OF BEARING FAILURE AT SPECIFIED LOADS AND CYCLING.

2256 THE NUMBER OF REQUIRED CYCLES SHALL BE NOT LESS THAN 2256.

2258 THE LOAD SHALL BE NOT LESS THAN 2258 PERCENT OF THE FATIGUE LOAD.

2260 FATIGUE LOAD (ROD-END BEARINGS). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2260.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FATIGUE LOAD (ROD END BEARINGS) (CONT)	
TEST METHODS (CONT)	
PER MIL-B-81935.	2262
MAXIMUM FATIGUE LOAD (SELECT ONE)	
(POUNDS)	2264
(NEWTONS)	2266
LOAD TOLERANCE (PERCENT)	2268
TESTING SPEED, CYCLES PER MINUTE (QUANTITY)	2270
FLUID COMPATIBILITY (BEARINGS WITH LINERS)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2300
AS FOLLOWS:	2302
NO EVIDENCE OF VOIDS IN LINER.	2304
NO EVIDENCE OF CORROSION.	2306
NO EMBEDDED CONTAMINANTS IN LINER.	2308
NO POROSITY, TEARING OR SEAM INTERRUPTION BY VOIDS.	2310
MAXIMUM LINER WEAR (SELECT ONE)	2312

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2262 FATIGUE LOAD (ROD-END BEARINGS). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-B-81935.

2264 THE FATIGUE LOAD SHALL BE NOT GREATER THAN 2264 POUND(S).

2266 THE FATIGUE LOAD SHALL BE NOT GREATER THAN 2266 NEWTON(S).

2268 THE FATIGUE LOAD TOLERANCE SHALL BE 2268 PERCENT.

2270 THE TESTING SPEED SHALL BE 2270 CYCLES PER MINUTE,

2300 FLUID COMPATIBILITY (BEARINGS WITH LINERS).
THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2300.

2302 FLUID COMPATIBILITY (BEARINGS WITH LINERS). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2304 THERE SHALL BE NO EVIDENCE OF VOIDS IN THE LINER.

2306 THERE SHALL BE NO EVIDENCE OF CORRISON.

2308 THERE SHALL BE NO EVIDENCE OF EMBEDDED CONTAMINANTS IN THE LINER.

2310 THERE SHALL BE NO EVIDENCE OF POROSITY, TEARING OR SEAM INTERRUPTION BY VOIDS.

2312 THE LINER WEAR SHALL BE NOT GREATER THAN 2312 INCH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLUID COMPATIBILITY (BEARINGS WITH LINERS) (CONT)	
MAXIMUM LINE-R WEAR (CONT)	
(MILLIMETER)	2314
MINIMUM LINER ADHERENCE OF CONTACT AREA TO SUBSTRATE (PERCENT)	2316
MAXIMUM DIAMETER OF CIRCLE, CIRCUMSCRIBING ALLOWABLE VOIDS (SELECT ONE)	
(INCH)	2318
(MILLIMETER)	2320
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2330
PER DOCUMENT (DOC DES)	2332
TEST FLUIDS AS FOLLOWS:	2334
A. (NAME) ____	2336
B. (NAME) ____	2338
C. (NAME) ____	2340
D. (NAME) ____	2342
E. (NAME) ____	2344

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2314 THE LINER WEAR SHALL BE NOT GREATER THAN 2314 MILLIMETER.

2316 THE LINER ADHERENCE OF CONTACT AREA TO SUBSTRATE SHALL BE NOT LESS THAN 2316 PERCENT.

2318 THE DIAMETER OF THE CIRCLE CIRCUMSCRIBING ALLOWABLE VOIDS SHALL BE NOT GREATER THAN 2318 INCH.

2320 THE DIAMETER OF THE CIRCLE CIRCUMSCRIBING ALLOWABLE VOIDS SHALL BE NOT GREATER THAN 2320 MILLIMETER.

2330 FLUID COMPATIBILITY (BEARINGS WITH LINERS). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2330.

2332 FLUID COMPATIBILITY (BEARINGS WITH LINERS). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2332.

2334 TESTING FLUIDS SHALL BE AS FOLLOWS:

2336 TEST FLUID A SHALL BE 2336.

2338 TEST FLUID B SHALL BE 2338.

2340 TEST FLUID C SHALL BE 2340.

2342 TEST FLUID D SHALL BE 2342.

2344 TEST FLUID E SHALL BE 2344.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLUID COMPATIBILITY (BEARINGS WITH LINERS) (CONT)	
PER DOCUMENT (CONT)	
FLUID TEMPERATURE (DEGREES CELSIUS)	2346
IMMERSION TIME (HOURS)	2348
FOLLOWING FLUID COMPATIBILITY TEST BEARING SHALL BE SUBJECTED TO THE OSCILLATION LOAD TEST WITHIN (MINUTES)	2350
FRICTION TORQUE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2370
AS FOLLOWS:	2372
AVERAGE TORQUE, ARITHMETIC MEAN	
(MILLIGRAM-MILLIMETERS)	2374
MAXIMUM TORQUE (MILLIGRAM-MILLIMETERS)	2376
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2380
PER MIL-STD-206.	2382
TEST LOAD (GRAMS)	2384

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2346 THE TEST FLUID TEMPERATURE SHALL BE 2346 DEGREES CELSIUS.

2348 THE IMMERSION TIME SHALL BE 2348 HOUR(S).

2350 FOLLOWING THE FLUID COMPATIBILITY TEST BEARING(S) SHALL BE SUBJECTED TO THE OSCILLATION LOAD TEST WITHIN 2350 MINUTE(S).

2370 FRICTION TORQUE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2370.

2372 FRICTION TORQUE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2374 THE AVERAGE TORQUE (ARITHMETIC MEAN OF BEARING TORQUE) SHALL BE 2374 MILLIGRAM-MILLIMETER(S).

2376 THE MAXIMUM TORQUE (MAXIMAL VALUE OF BEARING TORQUE) SHALL BE NOT GREATER THAN 2376 MILLIGRAM-MILLIMETER(S).

2380 FRICTION TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2380.

2382 FRICTION TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-206.

2384 THE TEST LOAD SHALL BE 2384 GRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FRICTION TORQUE (CONT)	
PER MIL-STD-206 (CONT)	
TEST TEMPERATURE (DEGREES CELSIUS)	2386
MAXIMUM RELATIVE HUMIDITY (PERCENT)	2388
HARDNESS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2390
PER HARDNESS TABLE, SEE TEST METHODS	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2394

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2386	THE TEST TEMPERATURE SHALL BE 2386 DEGREES CELSIUS.
2388	THE RELATIVE HUMIDITY FOR TEST SHALL BE NOT GREATER THAN 2388 PERCENT.
2390	HARDNESS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2390.
2394	HARDNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2394.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME

HARDNESS (CONT)

TEST METHODS (CONT)

TEST PER HARDNESS TABLE

NOTE: THIS TABLE IS USED IN SPECIFYING HARDNESS. REQUIREMENTS FOR SINGLE OR MULTIPLE COMPONENTS

HUMIDITY

REQUIREMENTS (SELECT ONE)

PER BASE DOCUMENT EXCEPT ____ 4798

NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE. 4799

NO DEGRADATION OF PERFORMANCE. 4835

REMAIN WITHIN SPECIFIED TOLERANCE. 4791

TEST METHODS (SELECT ONE)

PER BASE DOCUMENT EXCEPT ____ 4788

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

HARDNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE HARDNESS TABLE PARAMETERS.

HARDNESS TABLE

COMPONENT	LEGEND/ SURFACE	SCALE/ NUMBER(S)	TEST DOCUMENT	TEST METHOD
4035	4036	4037	4038	4039
4040	4041	4042	4043	4044
4045	4046	4047	4048	4049
4050	4051	4052	4053	4054
4055	4056	4057	4058	4059
4060	4061	4062	4063	4064
4065	4066	4067	4068	4069
4070	4071	4072	4073	4074
4075	4076	4077	4078	4079
4080	4081	4082	4083	4084

4798 HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.

4799 HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.

4815 THERE SHALL BE NO DEGRADATION OF PERFORMANCE.

4791 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

4788 HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-810, METHOD 507.	4871
*PROCEDURE NUMBER (SELECT ONE)	
TEST PROCEDURE I.	4767
EXTREME TEMPERATURE BEFORE TESTING (DEGREES CELSIUS)	4777
*DURATION OF TEMPERATURE EXPOSURE (HOURS)	4778
TEST PROCEDURE II.	6334
CYCLE LIMITED TO 24 HOURS DURATION.	4736
TEST PROCEDURE III.	6335
TEST PROCEDURE IV.	6336
TEST PROCEDURE V.	6337
NUMBER OF CYCLES (NO.)	4800
WATER PURITY BY CONDUCTIVITY METHOD.	4764
IMPACT STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3500

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4871	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 507 OF MIL-STD-810.
4767	PROCEDURE NUMBER I SHALL APPLY.
4777	SPECIMEN(S) SHALL BE EXPOSED TO 4777 DEGREES CELSIUS BEFORE TESTING.
4778	DURATION OF EXPOSURE TO EXTREME TEMPERATURE SHALL BE 4778 HOUR(S).
6334	PROCEDURE NUMBER II SHALL APPLY.
4716	CYCLES SHALL BE LIMITED TO 24 HOURS DURATION.
6335	PROCEDURE NUMBER III SHALL APPLY.
6336	PROCEDURE NUMBER IV SHALL APPLY.
6337	PROCEDURE NUMBER V SHALL APPLY.
4800	THERE SHALL BE 4800 TEST CYCLES.
4764	WATER PURITY SHALL BE DETERMINED BY THE CONDUCTIVITY METHOD.
3500	IMPACT STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMPACT STRENGTH (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	3502
IZOD IMPACT STRENGTH (NUMBER)	3504
NOTCH IMPACT STRENGTH (SELECT ONE)	
(POUND-FEET PER INCH)	3506
(NEWTON METERS PER MILLIMETER)	3508
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3520
PER ASTMD256	3522
(METHOD)	3524
SPECIMEN (DIRECTION OF CUT)	3526

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3502	IMPACT STRENGTH. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3504	THE IMPACT STRENGTH SHALL BE IZOD NUMBER 3504.
3506	THE IMPACT STRENGTH SHALL BE 3506 POUND-FEET PER INCH OF NOTCH.
3508	THE IMPACT STRENGTH SHALL BE 3508 NEWTON METERS PER MILLIMETER OF NOTCH.
3520	IMPACT STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3520.
3522	IMPACT STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD256.
3524	TEST METHOD 3524 SHALL APPLY.
3526	THE DIRECTION OF CUT OF THE SPECIMEN SHALL BE 3526.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NO-LOAD BREAKAWAY TORQUE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2400
AS FOLLOWS:	2402
ROTATE IN EITHER DIRECTION.	2404
NO AXIAL OR RADIAL LOOSENESS.	2406
NO LOAD BREAKAWAY TORQUE	
MINIMUM (SELECT ONE)	
(POUND-INCHES)	2408
(NEWTON METERS)	2410
MAXIMUM (SELECT ONE)	
(POUND-INCHES)	2412
(NEWTON METERS)	2414
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2420
PER DOCUMENT (DOC DES)	2422

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2400	NO-LOAD BREAKAWAY TORQUE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2400.
2402	NO-LOAD BREAKAWAY TORQUE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2404	THE BEARING SHALL BE CAPABLE OF BEING ROTATED IN EITHER DIRECTION.
2406	THERE SHALL BE NO AXIAL OR RADIAL LOOSENESS.
2408	THE NO-LOAD BREAKAWAY TORQUE SHALL BE NOT LESS THAN 2408 POUND-INCHES.
2410	THE NO-LOAD BREAKAWAY TORQUE SHALL BE NOT LESS THAN 2410 NEWTON METERS.
2412	THE NO-LOAD BREAKAWAY TORQUE SHALL BE NOT GREATER THAN 2412 POUND-INCHES.
2414	THE NO-LOAD BREAKAWAY TORQUE SHALL BE NOT GREATER THAN 2414 NEWTON METERS.
2420	NO-LOAD BREAKAWAY TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2420.
2422	NO-LOAD BREAKAWAY TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2422.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OSCILLATION RADIAL LOAD (BEARINGS WITH LINERS)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2430
AS FOLLOWS:	2432
NO EMBEDDED CONTAMINANTS, POROSITY OR TEARING OF LINERS.	2434
NO INTERRUPTION OF LINER EDGES AND SEAMS BY VOIDS.	2436
NO ROUGHNESS, LOOSENESS OR UNSMOOTH OPERATION OF THE BEARING.	2438
MAXIMUM DIAMETER OF CIRCLE CIRCUMSCRIBING ALLOWABLE VOIDS (SELECT ONE)	
(INCH)	2440
(MILLIMETER)	2442
MINIMUM LINER ADHERENCE OF CONTACT AREA TO SUBSTRATE (PERCENT)	2444
MAXIMUM LOADED ROTATIONAL BREAKAWAY TORQUE (SELECT ONE)	
(POUND-INCHES)	2446

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2430 OSCILLATION RADIAL LOAD (BEARINGS WITH LINERS). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2430.

2432 OSCILLATION RADIAL LOAD (BEARINGS WITH LINERS). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2434 THERE SHALL BE NO EMBEDDED CONTAMINANTS, POROSITY OR TEARING OF THE LINERS.

2436 THERE SHALL BE NO INTERRUPTION OF LINER EDGES AND SEAMS BY VOIDS.

2438 THERE SHALL BE NO ROUGHNESS, LOOSENESS OR UNSMOOTH OPERATION OF THE BEARING.

2440 THE DIAMETER OF THE CIRCLE CIRCUMSCRIBING ALLOWABLE VOIDS SHALL BE NOT GREATER THAN 2440 INCH.

2442 THE DIAMETER OF THE CIRCLE CIRCUMSCRIBING ALLOWABLE VOIDS SHALL BE NOT GREATER THAN 2442 MILLIMETER.

2444 THE LINER ADHERENCE OF CONTACT AREA TO SUBSTRATE SHALL BE NOT LESS THAN 2444 PERCENT.

2446 THE LOADED ROTATIONAL BREAKAWAY TORQUE SHALL BE NOT GREATER THAN 2446 POUND-INCHES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OSCILLATION RADIAL LOAD (BEARINGS WITH LINERS) (CONT)	
MAXIMUM LOADED ROTATIONAL BREAKAWAY TORQUE (CONT)	
(NEWTON METERS)	2448
MAXIMUM LINER WEAR (SELECT ONE)	
(INCH)	2450
(MILLIMETER)	2452
(PERCENT OF INITIAL MEASUREMENT)	2454
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2460
PER DOCUMENT (DOC DES)	2462
OSCILLATION LOAD (SELECT ONE)	
(POUNDS)	2464
(NEWTONS)	2466
OSCILLATION ARC (DEGREES)	2468
OSCILLATION RATE (CYCLES PER MINUTE)	2470
MAXIMUM CYCLES (QUANTITY)	2472

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2448 THE LOADED ROTATIONAL BREAKAWAY TORQUE SHALL BE NOT GREATER THAN 2448 NEWTON METERS.

2450 THE LINER WEAR SHALL BE NOT GREATER THAN 2450 INCH.

2452 THE LINER WEAR SHALL BE NOT GREATER THAN 2452 MILLIMETER.

2454 THE LINER WEAR SHALL BE NOT GREATER THAN 2454 PERCENT OF INITIAL MEASUREMENT.

2460 OSCILLATION RADIAL LOAD (BEARINGS WITH LINERS). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2460.

2462 OSCILLATION RADIAL LOAD (BEARINGS WITH LINERS). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2462.

2464 THE OSCILLATION LOAD SHALL BE 2464 POUND(S).

2466 THE OSCILLATION LOAD SHALL BE 2466 NEWTON(S).

2468 THE OSCILLATION ARC SHALL BE 2468 DEGREES.

2470 THE OSCILLATION RATE SHALL BE 2470 CYCLES PER MINUTE.

2472 THE QUANTITY OF CYCLES SHALL BE NOT GREATER THAN 2472.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RADIAL DYNAMIC LOAD	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1800
AS FOLLOWS:	1802
NO EVIDENCE OF ROUGHNESS, LOOSENESS OR FAILURE OF THE BEARING TO OPERATE SMOOTHLY.	
NO BALL OR RACEWAY DEFECTS.	
MINIMUM DYNAMIC LOAD (SELECT ONE)	
(POUNDS)	
(NEWTONS)	
DYNAMIC LOAD TOLERANCE (PERCENT)	
MINIMUM LIFE CYCLES (QUANTITY)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	
PER DOCUMENT (DOC DES)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1800 RADIAL DYNAMIC LOAD. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1800.

1802 RADIAL DYNAMIC LOAD. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

1801 THERE SHALL BE NO EVIDENCE OF ROUGHNESS, LOOSENESS OR FAILURE OF THE BEARING TO OPERATE SMOOTHLY.

1805 THERE SHALL BE NO BALL OR RACEWAY DEFECTS.

1803 THE RADIAL DYNAMIC LOAD SHALL BE NOT LESS THAN 1803 POUND(S).

1807 THE RADIAL DYNAMIC LOAD SHALL BE NOT LESS THAN 1807 NEWTON(S).

1809 THE RADIAL DYNAMIC LOAD TOLERANCE SHALL BE 1809 PERCENT.

1811 THE LIFE OF THE BEARING SHALL BE NOT LESS THAN 1811 CYCLES.

1979 RADIAL DYNAMIC LOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1979.

1981 RADIAL DYNAMIC LOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RADIAL DYNAMIC LOAD (CONT)	
PER DOCUMENT (CONT)	
OSCILLATION LOAD (SELECT ONE)	
(POUNDS)	1971
(NEWTONS)	1977
OSCILLATION ARC (DEGREES)	1972
OSCILLATION RATE (CYCLES PER MINUTE)	1973
OSCILLATION CYCLES (QUANTITY)	1975
RADIAL INTERNAL PLAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	
AS FOLLOWS:	
NO EVIDENCE THAT SMOOTHNESS OF BEARING OPERATION HAS LESSENED	1833
MAXIMUM INTERNAL PLAY (SELECT ONE)	
(INCH)	1835
(MILLIMETER)	1836

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1971	THE OSCILLATION LOAD SHALL BE 1971 POUND(S).
1977	THE OSCILLATION LOAD SHALL BE 1977 NEWTON(S).
1972	THE OSCILLATION ARC SHALL BE 1972 DEGREES.
1973	THE OSCILLATION RATE SHALL BE 1973 CYCLES PER MINUTE.
1975	THE OSCILLATION QUANTITY OF CYCLES SHALL BE 1975.
1831	RADIAL INTERNAL PLAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1831.
1832	RADIAL INTERNAL PLAY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1833	THERE SHALL BE NO EVIDENCE THAT SMOOTHNESS OF BEARING OPERATION HAS LESSENED.
1835	THE RADIAL INTERNAL PLAY SHALL BE NOT GREATER THAN 1835 INCH.
1836	THE RADIAL INTERNAL PLAY SHALL BE NOT GREATER THAN 1836 MILLIMETER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RADIAL INTERNAL PLAY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2008
PER DOCUMENT (DOC DES)	2009
TEST LOAD (SELECT ONE)	
(POUNDS)	2010
(NEWTONS)	2012
TEST LOAD SHALL BE APPLIED ALTERNATELY IN OPPOSITE DIRECTIONS	2014
TEST TEMPERATURE (DEGREES CELSIUS)	2016
RADIAL STRENGTH LIMIT LOAD	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1784
AS FOLLOWS:	1786
NO EVIDENCE OF PHYSICAL DAMAGE OR SMOOTHNESS OF BEARING OPERATION HAS LESSENED	1787

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2008	RADIAL INTERNAL PLAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2008.
2009	RADIAL INTERNAL PLAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2009.
2010	THE TEST LOAD SHALL BE 2010 POUND(S).
2012	THE TEST LOAD SHALL BE 2012 NEWTON(S).
2014	THE TEST LOAD SHALL BE APPLIED ALTERNATELY IN OPPOSITE DIRECTIONS.
2016	THE TEST TEMPERATURE SHALL BE 2016 DEGREES CELSIUS.
1784	RADIAL STRENGTH LIMIT LOAD. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1784.
1786	RADIAL STRENGTH LIMIT LOAD. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1787	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE OR SMOOTHNESS OF THE BEARING OPERATION HAS LESSENED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RADIAL STRENGTH LIMIT LOAD (CONT)	
AS FOLLOWS: (CONT)	
RADIAL STRENGTH LIMIT LOAD RATING (SELECT ONE)	
(POUNDS)	1790
(NEWTONS)	1792
MAXIMUM PLAY FROM INITIAL RADIAL PLAY (SELECT ONE)	
(INCH)	1793
(MILLIMETER)	1795
MAXIMUM DEPTH OF PERMANENT DEFORMATION (SELECT ONE)	
(INCH)	1789
(MILLIMETER)	1797
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1940
PER DOCUMENT (DOC DES)	1942
PRE-LOAD (SELECT ONE)	
(POUNDS)	1944

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1790 RADIAL STRENGTH LIMIT LOAD RATING SHALL BE 1790 POUND(S).

1792 RADIAL STRENGTH LIMIT LOAD RATING SHALL BE 1792 NEWTON(S).

1793 THE INTERNAL RAIDAL PLAY SHALL BE NOT GREATER THAN 1793 INCH.

1795 THE INTERNAL RADIAL PLAY SHALL BE NOT GREATER THAN 1795 MILLIMETER.

1789 THE PERMANENT DEFORMATION DEPTH SHALL BE NOT GREATER THAN 1789 INCH.

1797 THE PERMANENT DEFORMATION DEPTH SHALL BE NOT GREATER THAN 1797 MILLIMETER.

1940 RADIAL STRENGTH LIMIT LOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1940.

1942 RADIAL STRENGTH LIMIT LOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1942.

1944 THE PRE-LOAD SHALL BE 1944 POUND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RADIAL STRENGTH LIMIT LOAD (CONT)	
PRE-LOAD (CONT)	
(NEWTONS)	1946
PRE-LOAD DURATION (SELECT ONE)	
(MINUTES)	1948
(SECONDS)	1950
TEST LOAD (SELECT ONE)	
(POUNDS)	1953
(NEWTONS)	1955
TEST LOAD DURATION (SELECT ONE)	
(MINUTES)	1954
(SECONDS)	1956
RADIAL STATIC FRACTURE LOAD	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2500
AS FOLLOWS:	2502
NO EVIDENCE OF CRACKS OR FRACTURES.	2504
BEARING CAPABLE OF BEING TURNED BY HAND.	2506

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1946 THE PRE-LOAD SHALL BE 1946 NEWTON(S).

1948 THE PRE-LOAD DURATION SHALL BE 1948 MINUTE(S).

1950 THE PRE-LOAD DURATION SHALL BE 1950 SECOND(S).

1953 THE TEST LOAD SHALL BE 1953 POUND(S).

1955 THE TEST LOAD SHALL BE 1955 NEWTON(S).

1954 THE TEST LOAD DURATION SHALL BE 1954 MINUTE(S).

1956 THE TEST LOAD DURATION SHALL BE 1956 SECOND(S).

2500 RADIAL STATIC FRACTURE LOAD. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2500.

2502 RADIAL STATIC FRACTURE LOAD. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2504 THERE SHALL BE NO EVIDENCE OF CRACKS OR FRACTURES.

2506 THE BEARING SHALL BE CAPABLE OF BEING TURNED BY HAND.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RADIAL STATIC FRACTURE LOAD (CONT)	
AS FOLLOWS: (CONT)	
RATED LIMIT LOAD (SELECT ONE)	
(POUNDS)	2508
(NEWTONS)	2510
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2520
PER DOCUMENT (DOC DES)	2522
MIMIMUM RADIAL STATIC FRACTURE LOAD (PERCENT OF RATED)	2524
TEST DURATION (MINUTES)	2526
SALT SPRAY/FOG	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6356
AS FOLLOWS:	2540
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE.	2542
BEARING SHALL BE CAPABLE OF BEING FREELY OSCILLATED OR ROTATED BY HAND.	2544

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2508	THE RATED LIMIT LOAD SHALL BE 2508 POUND(S).
2510	THE RATED LIMIT LOAD SHALL BE 2510 NEWTON(S).
2520	RADIAL STATIC FRACTURE LOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2520.
2522	RADIAL STATIC FRACTURE LOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2522.
2524	THE RADIAL STATIC FRACTURE LOAD SHALL BE NOT LESS THAN 2524 PERCENT OF THE RATED LOAD.
2526	THE TEST DURATION SHALL BE 2526 MINUTE(S).
6356	SALT SPRAY/FOG. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH BASE DOCUMENT, EXCEPT 6356.
2540	SALT SPRAY/FOG. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2542	THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE.
2544	THE BEARING SHALL BE CAPABLE OF BEING FREELY OSCILLATED OR ROTATED BY HAND.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT SPRAY/FOG (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6353
PER ASTMB117.	6354
EXPOSURE PERIOD (HOURS)	4783
SEAL RETENTION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2600
AS FOLLOWS:	2602
NO LOOSENESS OR DISLODGEMENT.	2604
NO EVIDENCE OF PHYSICAL DAMAGE.	2606
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2610
PER MIL-B-7949.	2612
MINIMUM TORQUE LOAD (SELECT ONE)	
(POUND-INCHES)	2614
(NEWTON METERS)	2616
APPLY TORQUE LOAD IN DIRECTION TENDING TO DISLODGE SEAL.	2618

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6353 SALT SPRAY/FOG. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6353.

6354 SALT SPRAY/FOG. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMB117.

4783 DURATION OF THE TEST SHALL BE 4783 HOUR(S).

2600 SEAL RETENTION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2600.

2602 SEAL RETENTION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2604 THERE SHALL BE NO LOOSENESS OR DISLODGEMENT OF THE SEAL.

2606 THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

2610 SEAL RETENTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2610.

2612 SEAL RETENTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-B-7949.

2614 TORQUE LOAD SHALL BE NOT LESS THAN 2614 POUND-INCHES.

2616 TORQUE LOAD SHALL BE NOT LESS THAN 2616 NEWTON METERS.

2618 APPLY TORQUE LOAD IN DIRECTION TENDING TO DISLODGE SEAL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHEAR STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3540
AS FOLLOWS:	3542
MINIMUM SHEAR STRENGTH (SELECT ONE)	
(THOUSAND POUNDS PER SQUARE INCH)	3544
(MEGAPASCALS)	3546
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3560
PER ASTMD732.	3562
TEST LOAD (SELECT ONE)	
(POUNDS)	3564
(NEWTONS)	3566
SHOCK	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	7315
NO EVIDENCE OF PHYSICAL DAMAGE.	7316

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

3540 SHEAR STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3540.

3542 SHEAR STRENGTH. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

3544 SHEAR STRENGTH SHALL BE NOT LESS THAN 3544 THOUSAND POUNDS PER SQUARE INCH.

3546 SHEAR STRENGTH SHALL BE NOT LESS THAN 3546 MEGAPASCALS.

3560 SHEAR STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3560.

3562 SHEAR STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD732.

3564 TEST LOAD SHALL BE 3564 POUND(S).

3566 TEST LOAD SHALL BE 3566 NEWTON(S).

7315 SHOCK. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 7315.

7316 SHOCK. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	7311
PER DOCUMENT (DOC DES)	2630
DROP HEIGHT (SELECT ONE)	
(FEET)	2632
(METERS)	2634
IMPACT MATERIAL	2636
IMPACT ORIENTATION	2638
STABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2650
AS FOLLOWS:	2652
NO EVIDENCE THAT SMOOTHNESS OF BEARING OPERATION HAS LESSENED.	2654
MAXIMUM DIMENSIONAL CHANGE (SELECT ONE)	
(INCH)	2656
(MILLIMETER)	2658
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2670

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7311	SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT? EXCEPT 7311.
2630	SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2630.
2632	DROP HEIGHT SHALL BE 2632 FEET.
2634	DROP HEIGHT SHALL BE 2634 METERS.
2636	THE IMPACT MATERIAL SHALL BE 2636.
2638	IMPACT ORIENTATION SHALL BE 2638.
2650	STABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2650.
2652	STABILITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2654	THERE SHALL BE NO EVIDENCE THAT SMOOTHNESS OF BEARING OPERATION HAS LESSENED.
2656	THE DIMENSIONAL CHANGE SHALL BE NOT GREATER THAN 2656 INCH.
2658	THE DIMENSIONAL CHANGE SHALL BE NOT GREATER THAN 2658 MILLIMETER.
2670	STABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2670.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STABILITY (CONT)	
TEST METHODS (CONT)	
PER DOCUMENT (DOC DES)	2672
HIGH TEST TEMPERATURE (DEGREES CELSIUS)	2674
TEMPERATURE DURATION (HOURS)	2676
LOW TEST TEMPERATURE (DEGREES CELSIUS)	2678
TEMPERATURE DURATION (HOURS)	2680
SURFACE CONCENTRICITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2700
PER SURFACE CONCENTRICITY TABLE	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2672 STABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2672.

2674 THE HIGH TEST TEMPERATURE SHALL BE 2674 DEGREES CELSIUS.

2676 THE HIGH TEST TEMPERATURE DURATION SHALL BE 2676 HOUR(S).

2678 THE LOW TEST TEMPERATURE SHALL BE 2678 DEGREES CELSIUS.

2680 THE LOW TEST TEMPERATURE DURATION SHALL BE 2680 HOUR(S).

2700 SURFACE CONCENTRICITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENTS EXCEPT 2700.

SURFACE CONCENTRICITY TABLE.

COMPONENT	SURFACES	MAXIMUM (INCH)	DEVIATION (MILLIMETER)
2720	2721	2722	2723
2724	2725	2726	2727
2728	2729	2730	2731
2732	2733	2734	2735
2736	2737	2738	2739
2740	2741	2742	2743
2744	2745	2746	2747
2748	2749	2750	2751
2752	2753	2754	2755
2756	2757	2758	2759
2760	2761	2762	2763
2764	2765	2766	2767

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SURFACE CONCENTRICITY (CONT)	
PER SURFACE CONCENTRICITY TABLE. (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2710
PER DOCUMENT (DOC DES)	2712
SURFACE PARALLELISM	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2800

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

SURFACE CONCENTRICITY TABLE (CONT)

NOTE A 2780.
NOTE B 2781.
NOTE C 2782.
NOTE D 2783.
NOTE E 2784.
NOTE F 2785.
NOTE G 2786.
NOTE H 2737.
NOTE I 2788.
NOTE J 2789.
NOTE K 2736.
NOTE L 2791.

2710 SURFACE CONCENTRICITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2710.

2712 SURFACE CONCENTRICITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2712.

2800 SURFACE PARALLELISM. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2800.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SURFACE PARALLELISM (CONT)	
PER SURFACE PARALLELISM TABLE.	2854
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2810
PER FF-B-171.	2812

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2854 SURFACE PARALLELISM. THE REQUIREMENT(S) SHALL BE AS SPECIFIED IN THE SURFACE PARALLELISM TABLE.

SURFACE PARALLELISM TABLE

SURFACES		MAXIMUM DEVIATION (INCH)	(MILLIMETER)
2820	2821	2822	2823
2824	2825	2826	2827
2828	2829	2830	2833
2832	2833	2834	2835
2836	2837	2838	2839
2840	2843	2842	2843
2844	2845	2846	2847
2848	2849	2850	2851
2852	2853	2854	2855
2856	2857	2858	2859
2860	2861	2862	2863
2864	2865	2866	2867

NOTE A 2880.
NOTE B 2881.
NOTE c 2882.
NOTE D 2883.
NOTE E 2884.
NOTE F 2885.
NOTE G 2886.
NOTE H 2887.
NOTE I 2888.
NOTE J 2889.
NOTE K 2890.
NOTE L 2891.

2810 SURFACE PARALLELISM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2810.

2812 SURFACE PARALLELISM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH FF-B-171.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SURFACE PERPENDICULARITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2900
PER SURFACE PERPENDICULARITY TABLE	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2900 SURFACE PERPENDICULARITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2900.

SURFACE PERPENDICULARITY. THE REQUIREMENT(S) SHALL BE AS SPECIFIED IN THE SURFACE PERPENDICULARITY TABLE.

SURFACE PERPENDICULARITY TABLE

COMPONENT	SURFACES	MAXIMUM DEVIATION (INCH)	(MILLIMETER)
2920	2921	2922	2923
2924	2925	2926	2927
2928	2929	2930	2931
2932	2933	2934	2935
2936	2937	2938	2939
2940	2941	2942	2943
2944	2945	2946	2947
2948	2949	2950	2951
2952	2953	2954	2955
2956	2957	2958	2959
2960	2961	2962	2963
2964	2965	2966	2967

NOTE A 2980.
NOTE B 2981.
NOTE C 2982.
NOTE D 2983.
NOTE E 2984.
NOTE F 2985.
NOTE G 2986.
NOTE H 2987.
NOTE I 2988.
NOTE J 2989.
NOTE K 2990.
NOTE L 2991.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SURFACE PERPENDICULARITY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2910
PER MIL-B-18367.	2912
SURFACE TEXTURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4200
AS FOLLOWS:	4202
NO EVIDENCE OF SURFACE DEFECTS.	4204

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2910	SURFACE PERPENDICULARITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2910.
2912	SURFACE PERPENDICULARITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-B-18367.
4200	SURFACE TEXTURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4200.
4202	SURFACE TEXTURE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
4204	THERE SHALL BE NO EVIDENCE OF SURFACE DEFECTS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SURFACE TEXTURE (CONT)	
AS FOLLOWS: (CONT)	
PER SURFACE TEXTURE TABLE	
NOTE: THIS TABLE IS USED FOR SPECIFYING ROUGHNESS HEIGHT (ARITHMETICAL AVERAGE DEVIATION), AND WAVINESS HEIGHT (PEAK TO VALLEY DISTANCE)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4210
PER ANSIB461.	4232

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

SURFACE TEXTURE. THE REQUIREMENT(S) SHALL BE AS SPECIFIED IN THE SURFACE TEXTURE TABLE,

SURFACE TEXTURE TABLE

COMPONENT	LEGEND/ SURFACE	MAXIMUM ROUGHNESS HEIGHT MICRO-INCHES	MAXIMUM ROUGHNESS HEIGHT MICRO-METERS	MAXIMUM WAVINESS HEIGHT INCH	MAXIMUM WAVINESS HEIGHT MILLI-METER
4260	4261	4262	4263	4264	4265
4266	4267	4268	4269	4270	4271
4272	4273	4274	4275	4276	4277
4278	4279	4280	4281	4282	4283
4284	4285	4286	4287	4288	4289
4290	4291	4292	4293	4294	4295
4296	4297	4298	4299	4300	4301
4302	4303	4304	4305	4306	4307
4308	4309	4310	4311	4312	4313
4314	4315	4316	4317	4318	4319

NOTE A 4380.
NOTE B 4381.
NOTE C 4382.
NOTE D 4383.
NOTE E 4384.
NOTE F 4385.
NOTE G 4386.
NOTE H 4387.
NOTE I 4388.
NOTE J 4389.
NOTE K 4390.

4210 SURFACE TEXTURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4210.

4212 SURFACE TEXTURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ANSIB461.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, HIGH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6228
AS FOLLOWS:	3100
NO EVIDENCE OF PHYSICAL DAMAGE.	3102
NO IMPAIRED RETENTION OF Lubricant	3104
MAXIMUM LUBRICANT LOSS BY WEIGHT (PERCENT)	3106
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6217
PER MIL-STD-810, METHOD 501.	6218
*PROCEDURE (ROMAN NUMERAL)	6219
STORAGE TEMPERATURE (DEGREES CELSIUS)	6220
STORAGE DURATION (HOURS)	6221
HIGHEST OPERATING TEMPERATURE (DEGREES CELSIUS)	6222
OPERATION TIME (SELECT ONE)	
(MINUTES)	6224

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6228 TEMPERATURE, HIGH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6228.

3100 TEMPERATURE, HIGH. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

3102 THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

3104 THERE SHALL BE NO EVIDENCE OF SEAL INCOMPATIBILITY TO LUBRICANT, WARPAGE, EMBRITTLEMENT OR DETERIORATION THAT WOULD IMPAIR RETENTION OF THE LUBRICANT.

3106 THE LUBRICANT LOSS BY WEIGHT SHALL BE NOT GREATER THAN 3106 PERCENT.

6217 TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6217.

6218 TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 501 OF MIL-STD-810.

6219 PROCEDURE NUMBER 6219 SHALL APPLY.

6220 STORAGE TEMPERATURE SHALL BE 6220 DEGREES CELSIUS.

6221 STORAGE DURATION SHALL BE 6221 HOUR(S).

6222 HIGHEST OPERATING TEMPERATURE SHALL BE 6222 DEGREES CELSIUS.

6224 OPERATING TIME SHALL BE 6224 MINUTE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, HIGH (CONT)	
OPERATION TIME (CONT)	
(HOURS)	6225
TEMPERATURE, LOW	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6318
AS FOLLOWS:	3120
NO EVIDENCE OF PHYSICAL DAMAGE.	3122
MAXIMUM NO-LOAD BREAKAWAY TORQUE (SELECT ONE)	
(POUND-INCHES)	3124
(NEWTON METERS)	3126
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6231
PER MIL-STD-810, METHOD 502.	6232
STORAGE TEMPERATURE (DEGREES CELSIUS)	6234
STORAGE DURATION (HOURS)	6235

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6225 OPERATING TIME SHALL BE 6225 HOUR(S).

6318 TEMPERATURE, LOW. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6318.

3120 TEMPERATURE, LOW. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

3122 THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

3124 NO-LOAD BREAKAWAY TORQUE SHALL BE NOT GREATER THAN 3124 POUND-INCHES.

3126 NO-LOAD BREAKAWAY TORQUE SHALL BE NOT GREATER THAN 3126 NEWTON METERS.

6231 TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6231.

6232 TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 502 OF MIL-STD-810.

6234 STORAGE TEMPERATURE SHALL BE 6234 DEGREES CELSIUS.

6235 STORAGE DURATION SHALL BE 6235 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, LOW (CONT)	
PER MIL-STD-810, METHOD 502. (CONT)	
LOWEST OPERATING TEMPERATURE (DEGREES CELSIUS)	6236
CHAMBER AIR VELOCITY (SELECT ONE)	
(FEET PER SECOND)	6237
(METERS PER SECOND)	6238
OPERATION TIME (SELECT ONE)	
(MINUTES)	6315
(HOURS)	6316
TENSILE STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3600
AS FOLLOWS:	3602
MINIMUM TENSILE STRENGTH (SELECT ONE)	
(THOUSAND POUNDS PER SQUARE INCH)	3604
(MEGAPASCALS)	3606
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3620

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6236 LOWEST OPERATING TEMPERATURE SHALL BE 6236 DEGREES CELSIUS.

6237 CHAMBER AIR VELOCITY SHALL BE 6237 FEET PER SECOND.

6238 CHAMBER AIR VELOCITY SHALL BE 6238 METERS PER SECOND.

6315 OPERATING TIME SHALL BE 6315 MINUTE(S).

6316 OPERATING TIME SHALL BE 6316 HOUR(S).

3600 TENSILE STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3600.

3602 TENSILE STRENGTH. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

3604 TENSILE STRENGTH SHALL BE NOT LESS THAN 3604 THOUSAND POUNDS PER SQUARE INCH.

3606 TENSILE STRENGTH SHALL BE NOT LESS THAN 3606 MEGAPASCALS.

3620 TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3620.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TENSILE STRENGTH (CONT)	
TEST METHODS (CONT)	
PER ASTMD638.	3622
TEST LOAD (SELECT ONE)	
(POUNDS)	3624
(NEWTONS)	3626
ULTIMATE STATIC LOAD	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3200
AS FOLLOWS:	3202
REMAIN WITHIN SPECIFIED TOLERANCE.	3204
NO FRACTURES OF ROD END BODY.	3206
TEST METHODS (SELECT) ONE)	
PER BASE DOCUMENT EXCEPT ____	3220
PER MIL-B-81935.	3222
ULTIMATE STATIC LOAD (SELECT ONE)	
(POUNDS)	3224

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

3622 TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD638.

3624 TEST LOAD SHALL B3 3624 POUND(S).

3626 TEST LOAD SHALL BE 3626 NEWTON(S).

3200 ULTIMATE STATIC LOAD. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3200.

3202 ULTIMATE STATIC LOAD. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

3204 THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

3206 THERE SHALL BE NO EVIDENCE OF CRACKS OR FRACTURES OF THE ROD-END BODY.

3220 ULTIMATE STATIC LOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3220.

3222 ULTIMATE STATIC LOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-B-81935.

3224 THE ULTIMATE STATIC LOAD SHALL BE 3224 POUND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ULTIMATE STATIC LOAD (CONT)	
ULTIMATE STATIC LOAD (CONT)	
(NEWTONS)	3226
LOAD RATE	
(PERCENT PER SECOND)	3228
TEST DURATION	
(MINUTES)	3230
VIBRATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4681
NO EVIDENCE OF PHYSICAL DAMAGE.	4682
REMAIN WITHIN SPECIFIED TOLERANCE,	1538
NO LOOSENESS OR DETACHMENT OF CLOSURES.	3306
MAXIMUM FREQUENCY LIMIT	
LOW BAND (ANDERONS)	3308
MEDIUM BAND (ANDERONS)	3310
HIGH BAND (ANDERONS)	3312

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

3226 THE ULTIMATE STATIC LOAD SHALL BE 3226 NEWTONS.

3228 THE LOAD RATE SHALL BE 3228 PERCENT PER SECOND OF THE ULTIMATE STATIC LOAD.

3230 THE DURATION OF TEST SHALL BE 3230 MINUTES.

4681 VIBRATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4681.

4682 VIBRATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

1538 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

3306 THERE SHALL BE NO LOOSENESS OR DETACHMENT OF CLOSURES.

3308 LOW BAND FREQUENCY SHALL BE NOT GREATER THAN 3308 ANDERONS.

3310 MEDIUM BAND FREQUENCY SHALL BE NOT GREATER THAN 3310 ANDERONS.

3312 HIGH BAND FREQUENCY SHALL BE NOT GREATER THAN 3312 ANDERONS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1505
PER MIL-STD-810, METHOD 514.	1514
*PROCEDURE NUMBER (ROMAN NUMERAL)	1518
EQUIPMENT (CATEGORY)	1540
PER MIL-B-17931.	3322
TEST LOAD (SELECT ONE)	
(POUNDS)	3324
(NEWTONS)	3326
WOBBLE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3400
AS FOLLOWS:	3402
NO EVIDENCE OF UNSMOOTH OPERATION	3404
MAXIMUM WOBBLE (SELECT ONE)	
(INCH)	3406
(MILLIMETERS)	3408

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1505	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1505.
1514	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 514 OF MIL-STD-810.
1518	PROCEDURE NUMBER 1518 SHALL APPLY.
1540	THE EQUIPMENT CATEGORY SHALL BE 1540 IN ACCORDANCE WITH METHOD 514 OF MIL-STD-810.
3322	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-B-17931.
3324	THE TEST LOAD SHALL BE 3324 POUND(S).
3326	THE TEST LOAD SHALL BE 3326 NEWTON(S).
3400	WOBBLE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3400.
3402	WOBBLE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3404	THERE SHALL BE NO EVIDENCE OF UNSMOOTH OPERATION.
3406	THE WOBBLE SHALL BE NOT GREATER THAN 3406 INCH.
3408	THE WOBBLE SHALL BE NOT GREATER THAN 3408 MILLIMETER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WOBBLE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3410
PER MIL-B-6038.	3412
NUMBER OF MEASUREMENT POINTS (QUANTITY)	3414
MEASUREMENT POINTS SHALL BE SPACED EQUALLY ABOUT THE BEARING AXIS AND LIE IN A PLANE PARALLEL TO BEARING FLANGE FACES.	3416
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

3410 WOBBLE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3410.

3412 WOBBLE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-B-6038.

3414 THE NUMBER OF MEASUREMENT POINTS SHALL BE 3414.

3416 MEASUREMENT POINTS SHALL BE EQUALLY SPACED ABOUT THE BEARING AXIS AND LIE IN A PLANE PARALLEL TO THE BEARING FLANGE FACES.

MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.

6870 WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.

ADDITIONAL REQUIREMENTS.

7001 (A) 7001.

7002 (B) 7002.

7003 (c) 7003.

7004 (D) 7004.

7005 (E) 7005.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-130.	7629
ADDITIONAL PART MARKING	
A_____	6991
B_____	6992
C_____	6993
D_____	6994
E_____	6995
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH	
6372	PART MARKING.	PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7629	PART MARKING.	PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.
	ADDITIONAL PART MARKING.	
6991	(A) 6991.	
6992	(B) 6992.	
6993	(C) 6993.	
6994	(D) 6994.	
6995	(E) 6995.	

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI

(Project EDS-A250)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX A


ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

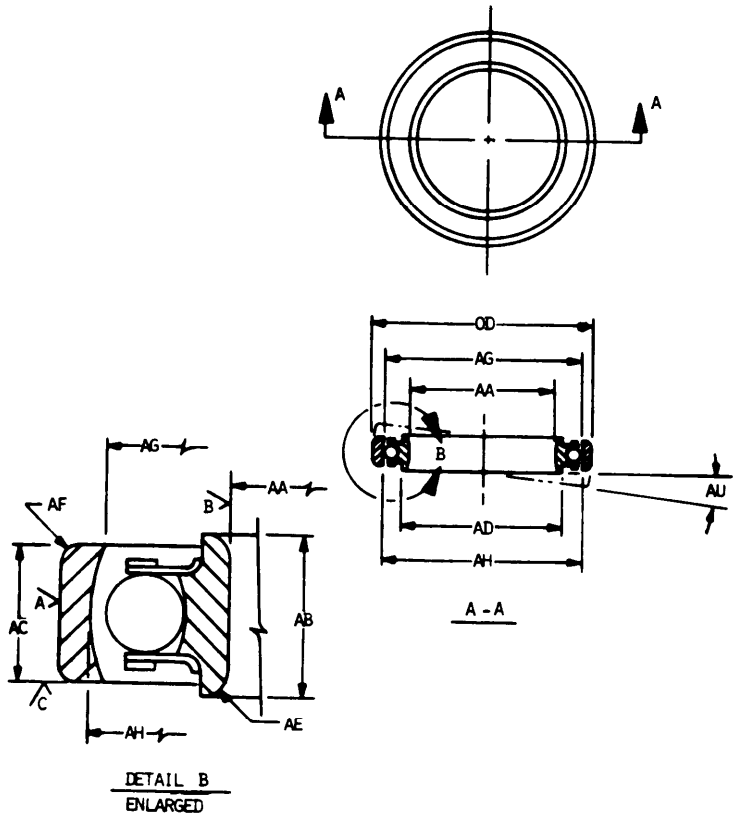


112-01-1

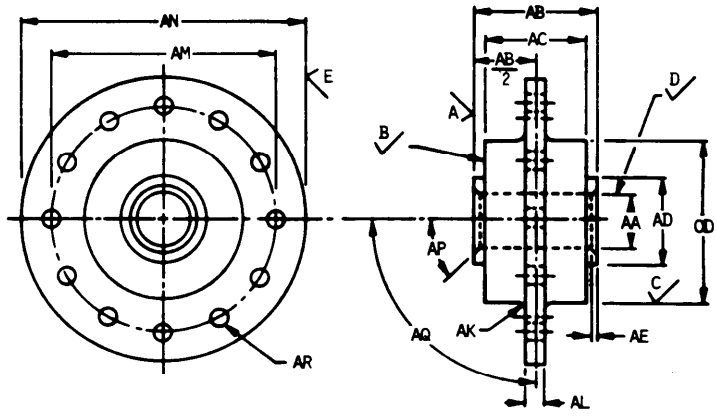


112-01-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

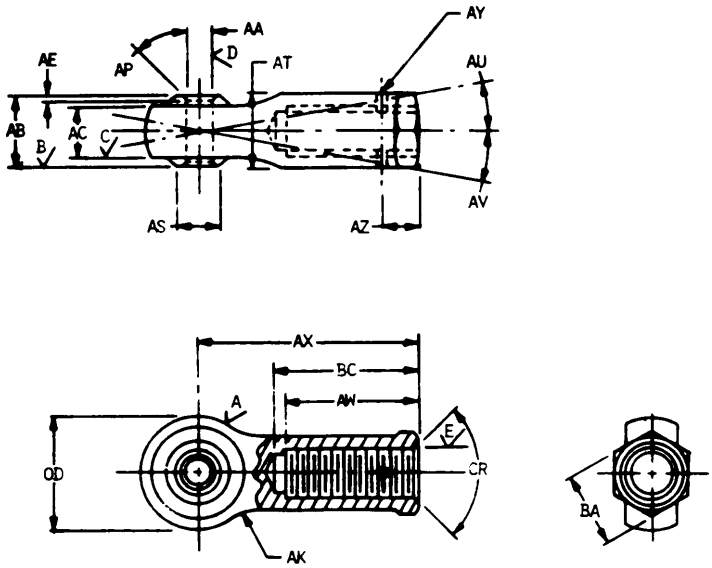


112-01-3

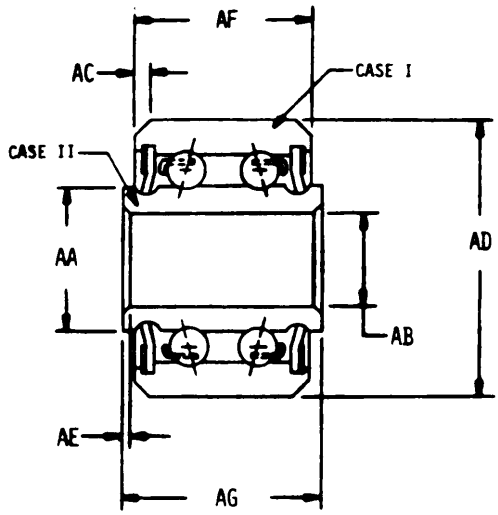


112-01-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

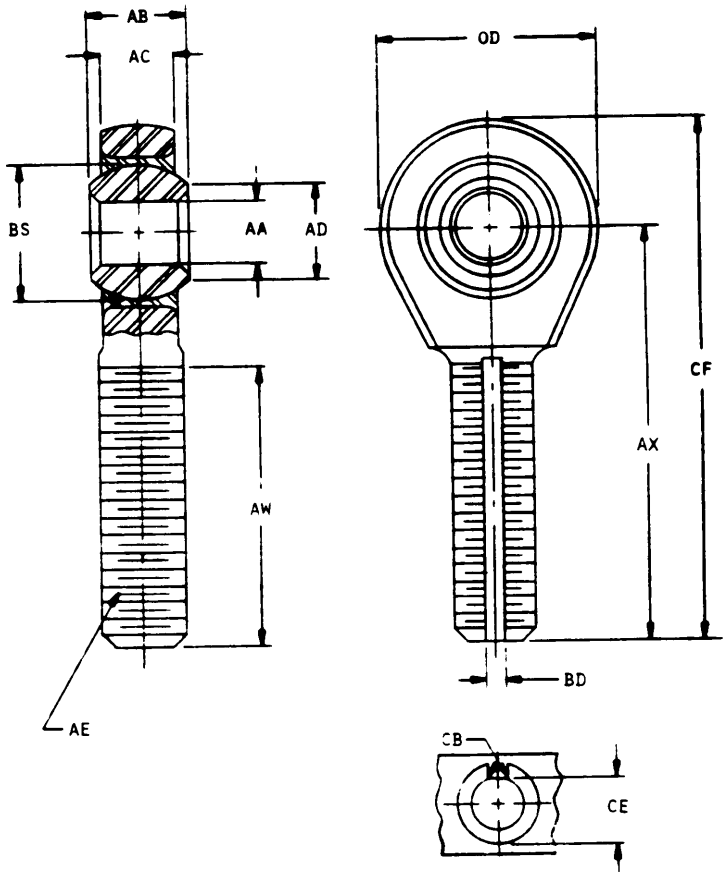


112-01-4

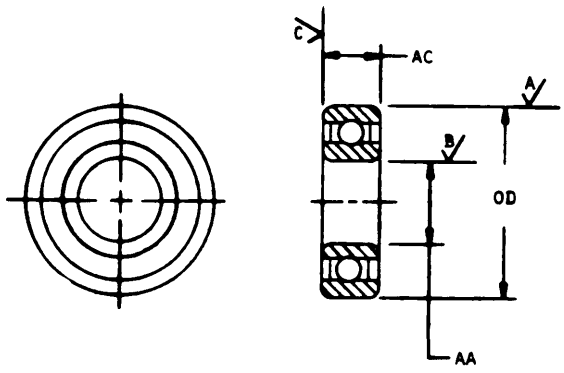


112-01-6


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

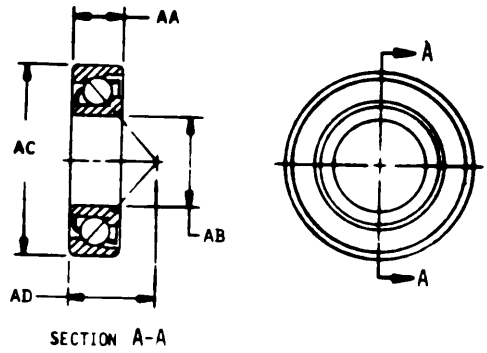

112-01-7

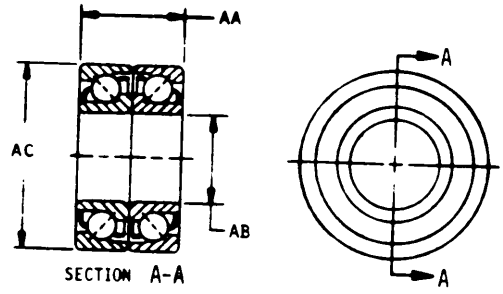


112-01-8

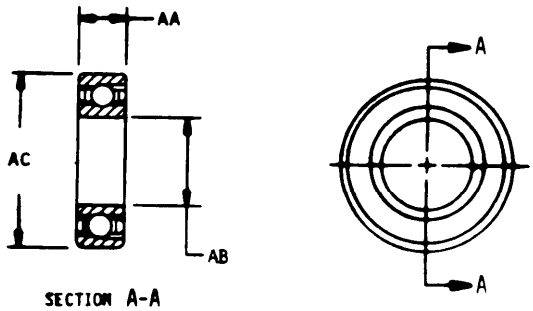


112-01-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

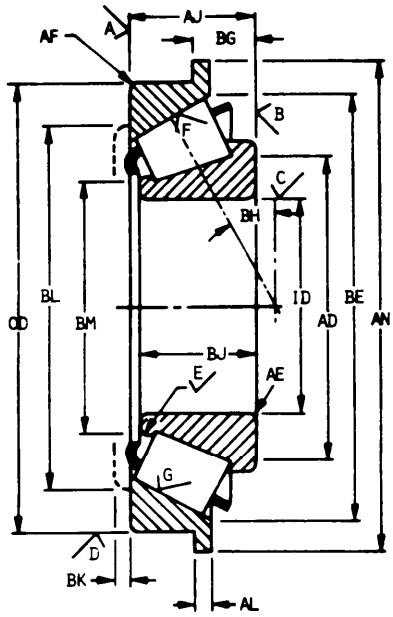


112-02-2

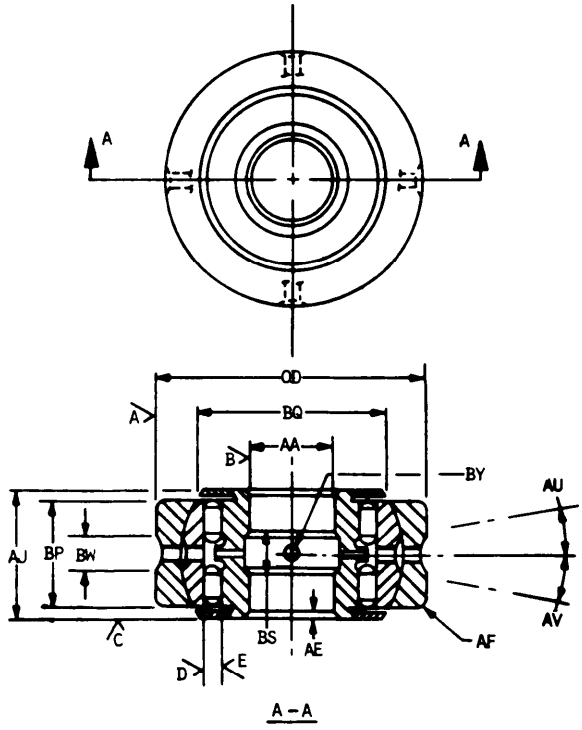


112-02-1


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

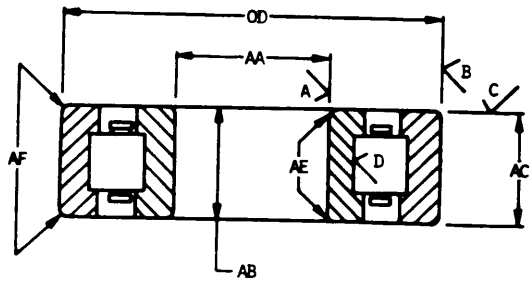

112-02-3

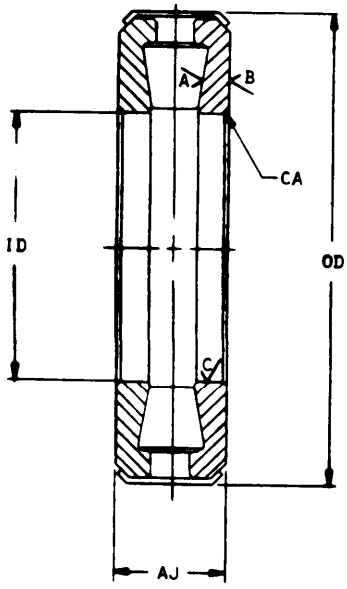


112-02-4

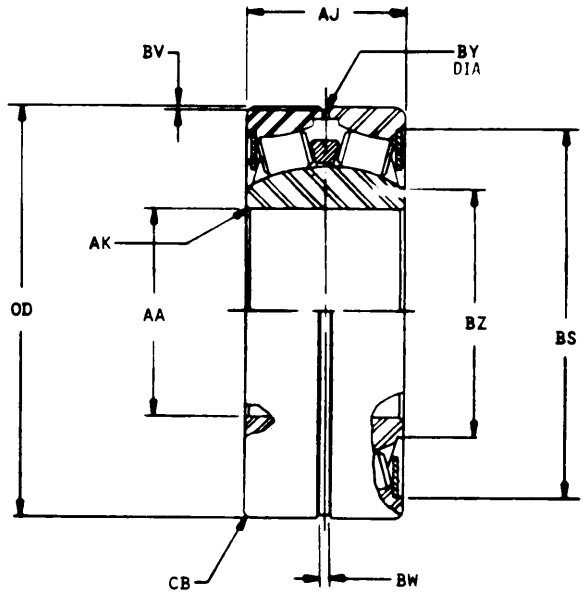


112-02-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

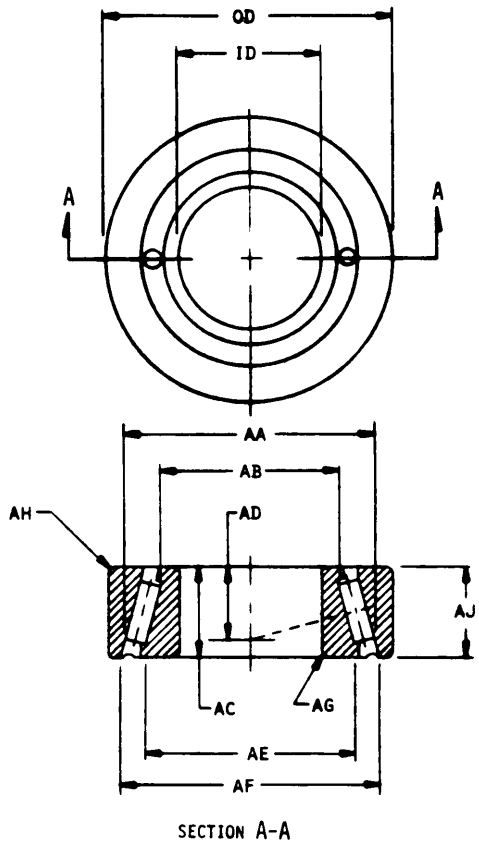


SECTION A-A

112-02-6

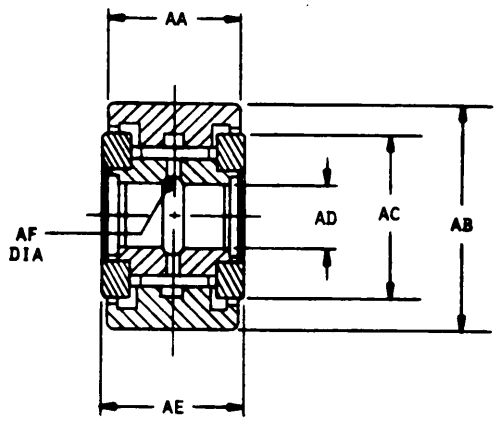


112-02-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

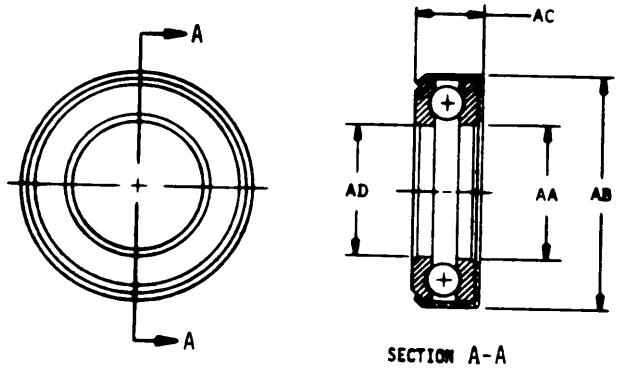



112-02-8

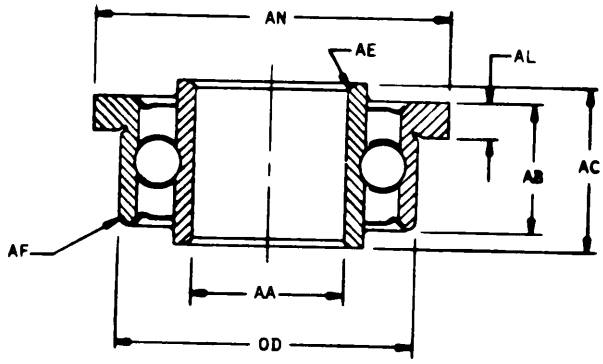


112-02-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

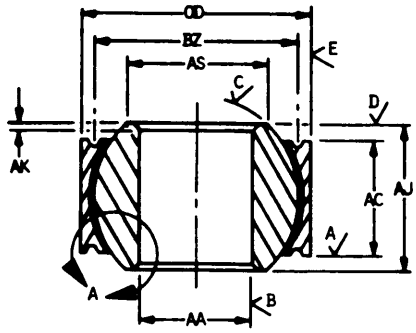


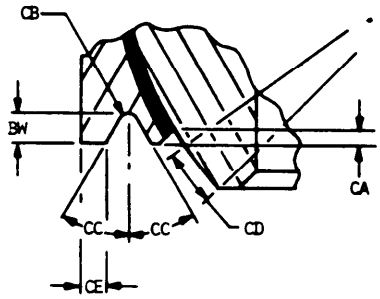


112-03-1

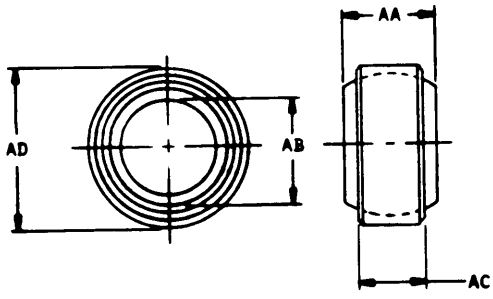


112-03-2




112-03-3



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

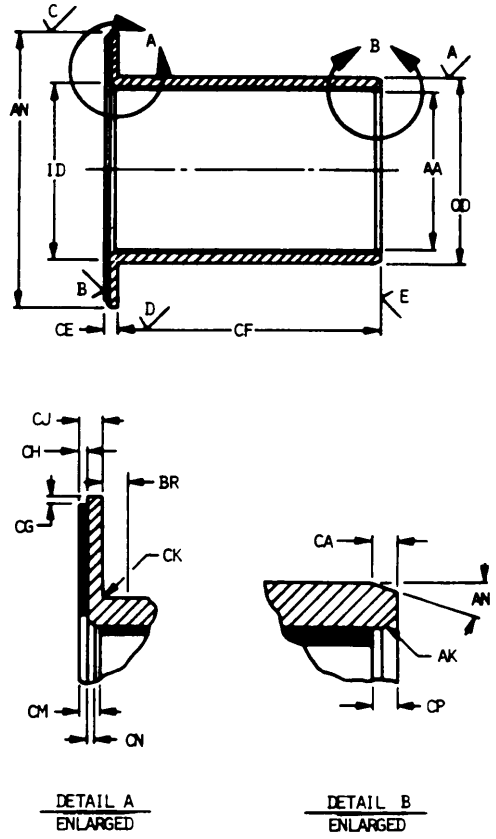


112-04-1

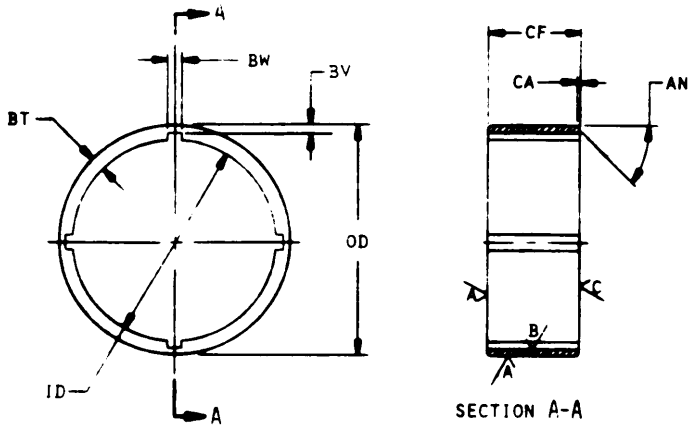



112-04-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

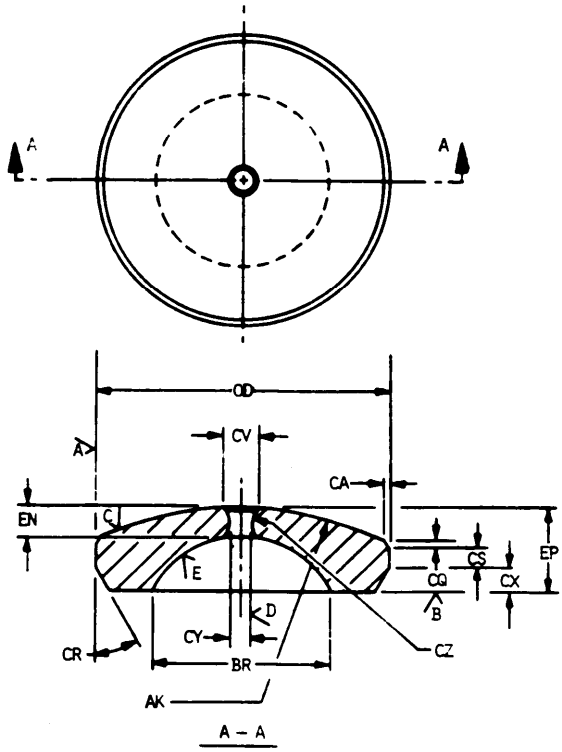

112-05-1




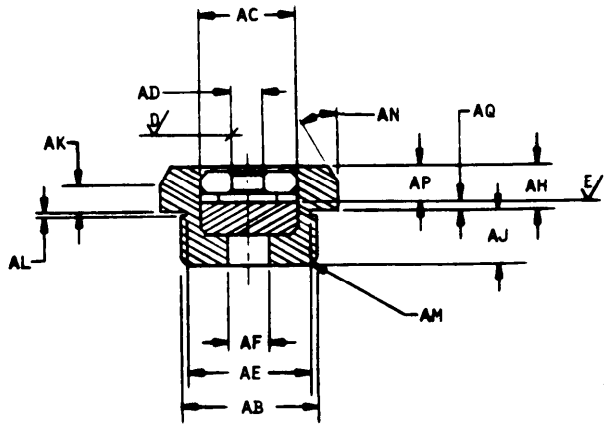


SECTION A-A


112-05-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

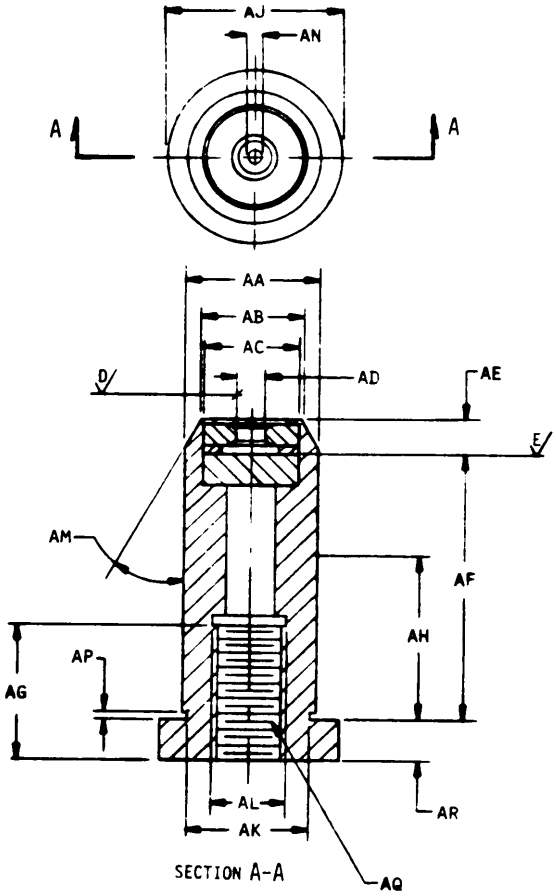


112-05-3

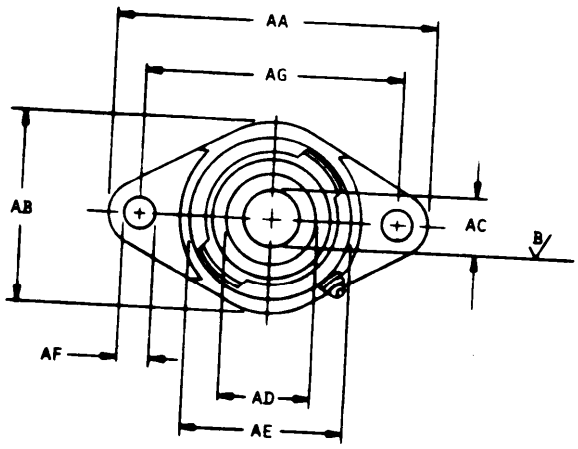

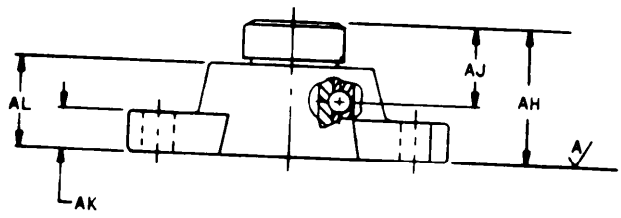


112-06-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

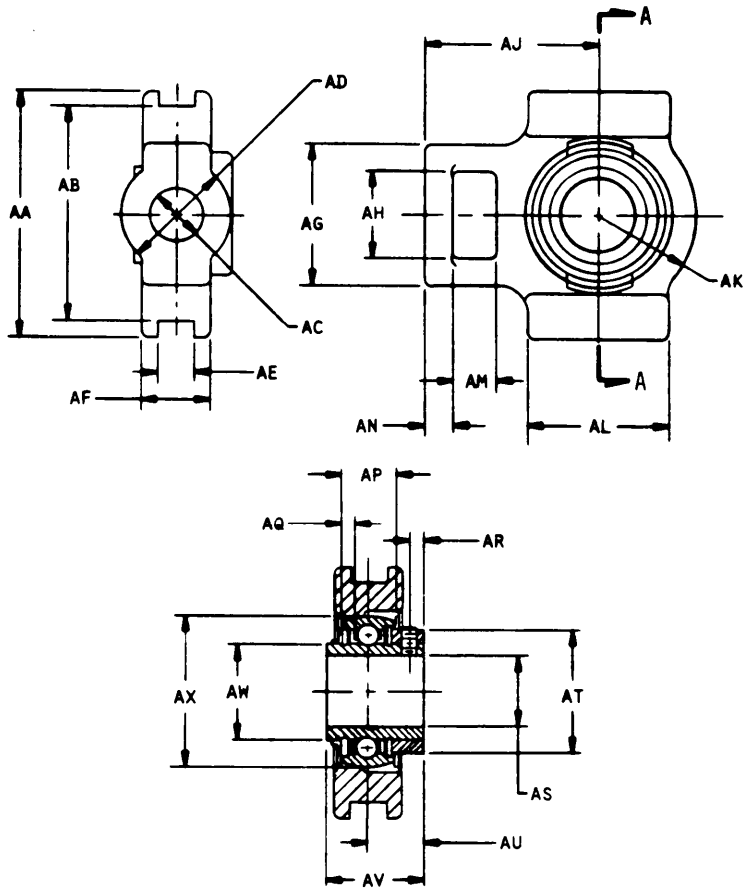

SECTION A-A

112-06-2

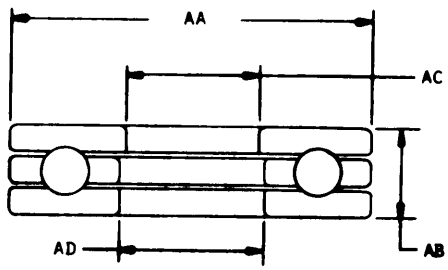

112-07-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	26	1604	38	1756	46	1837	54
0102	26	1606	38	1757	46	1839	54
0103	26	1619	42	1758	46	1841	54
0104	26	1620	38	1760	46	1843	54
0105	26	1621	42	1762	48	1845	54
0107	28	1622	38	1764	48	1850	48
0108	28	1624	38	1766	48	1852	48
0780	26	1626	38	1768	48	1854	48
0800	26	1628	38	1784	100	1856	48
1003	26	1630	38	1786	100	1858	48
1004	26	1632	38	1787	100	1860	48
1005	26	1634	38	1789	102	1862	48
1006	26	1636	38	1790	102	1864	50
1008	26	1638	38	1792	102	1866	50
1009	38	1640	32	1793	102	1940	102
1505	136	1642	32	1795	102	1942	102
1514	136	1644	32	1797	102	1944	102
1518	136	1646	32	1800	96	1946	104
1529	36	1648	32	1801	96	1948	104
1538	134	1652	32	1802	96	1950	104
1539	78	1654	32	1803	96	1953	104
1540	136	1656	32	1805	96	1954	104
1562	40	1658	32	1807	96	1955	104
1564	40	1660	32	1809	96	1956	104
1570	42	1662	32	1811	96	1971	98
1572	42	1664	32	1816	56	1972	98
1574	42	1666	50	1818	56	1973	98
1576	42	1668	50	1819	56	1975	98
1580	42	1670	46	1821	58	1977	98
1582	42	1672	46	1822	56	1979	96
1584	44	1674	46	1823	58	1981	96
1586	44	1676	50	1824	58	1994	58
1588	44	1678	52	1826	58	1995	58
1590	44	1680	52	1828	58	1996	58
1592	44	1682	52	1830	58	1997	58
1594	44	1722	50	1831	98	1998	58
1596	44	1723	50	1832	98	2000	60
1598	44	1724	50	1833	98	2001	60
1600	30	1726	50	1835	98	2003	60
1602	30	1755	46	1836	98	2008	100

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2009	100	2182	66	2318	78	2440	92
2010	100	2184	68	2320	78	2442	92
2012	100	2190	68	2330	78	2444	92
2014	100	2192	68	2332	78	2446	92
2016	100	2194	68	2334	78	2448	94
2019	56	2200	68	2336	78	2450	94
2020	56	2202	68	2338	78	2452	94
2021	56	2204	68	2340	78	2454	94
2022	56	2206	68	2342	78	2460	94
2023	56	2208	68	2344	78	2462	94
2025	56	2210	70	2346	80	2464	94
2100	60	2212	70	2348	80	2466	94
2102	60	2214	70	2350	80	2468	94
2104	60	2216	72	2370	80	2470	94
2106	60	2218	72	2372	80	2474	94
2108	60	2230	72	2374	80	2500	104
2110	60	2232	72	2376	80	2502	104
2120	60	2234	72	2380	80	2504	104
2122	60	2236	72	2382	80	2506	104
2124	62	2238	72	2384	80	2508	106
2126	62	2250	74	2386	82	2510	106
2130	62	2252	74	2388	82	2520	106
2132	62	2254	74	2390	82	2522	106
2134	62	2256	74	2394	82	2524	106
2136	62	2258	74	2396	84	2526	106
2138	62	2260	74	2400	88	2540	106
2140	62	2262	76	2402	88	2542	106
2150	62	2264	76	2404	88	2544	106
2152	62	2266	76	2406	90	2600	108
2160	64	2268	76	2408	90	2602	108
2162	64	2270	76	2410	90	2604	108
2164	66	2300	76	2412	90	2606	108
2166	66	2302	76	2414	90	2610	108
2168	66	2304	76	2420	90	2612	108
2170	66	2306	76	2422	90	2614	108
2172	66	2308	76	2430	92	2616	108
2174	66	2310	76	2432	92	2618	108
2176	66	2312	76	2434	92	2630	112
2178	66	2314	78	2436	92	2632	112
2180	66	2316	78	2438	92	2634	112

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2636	112	2744	115	2821	119	2862	119
2638	112	2745	115	2822	119	2863	119
2650	112	2746	115	2823	119	2864	119
2652	112	2747	115	2824	119	2865	119
2654	112	2748	115	2825	119	2866	119
2656	112	2749	115	2826	119	2867	119
2658	112	2750	115	2827	119	2880	119
2670	112	2751	115	2828	119	2881	119
2672	114	2752	115	2829	119	2882	119
2674	114	2753	115	2830	119	2883	119
2676	114	2754	115	2831	119	2884	119
2678	114	2755	115	2832	119	2885	119
2680	114	2756	115	2833	119	2886	119
2700	114	2757	115	2834	119	2887	119
2710	116	2758	115	2835	119	2888	119
2712	116	2759	115	2836	119	2889	119
2720	115	2760	115	2837	119	2890	119
2721	115	2761	115	2838	119	2891	119
2722	115	2762	115	2839	119	2900	120
2723	115	2763	115	2840	119	2910	122
2724	115	2764	115	2841	119	2912	122
2725	115	2765	115	2843	119	2920	121
2726	115	2766	115	2844	119	2921	121
2727	115	2767	115	2845	119	2922	121
2728	115	2780	117	2846	119	2923	121
2729	115	2781	117	2847	119	2924	121
2730	115	2782	117	2848	119	2925	121
2731	115	2783	117	2849	119	2926	121
2732	115	2784	117	2850	119	2927	121
2733	115	2785	117	2851	119	2928	121
2734	115	2786	117	2852	119	2929	121
2735	115	2787	117	2853	119	2930	121
2736	115	2788	117	2854	116	2931	121
2737	115	2789	117	2855	119	2932	121
2738	115	2790	117	2856	119	2933	121
2739	115	2791	117	2857	119	2934	121
2740	115	2800	116	2858	119	2935	121
2741	115	2810	118	2859	119	2936	121
2742	115	2812	118	2860	119	2937	121
2743	115	2820	119	2861	119	2938	121

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2939	121	3100	126	3444	64	4040	85
2940	121	3102	126	3446	64	4041	85
2941	121	3104	126	3460	72	4042	85
2942	121	3106	126	3462	72	4043	85
2943	121	3120	128	3464	72	4044	85
2944	121	3122	128	3466	72	4045	85
2945	121	3124	128	3480	74	4046	85
2946	121	3126	128	3482	74	4047	85
2947	121	3141	638	3484	74	4048	85
2948	121	3200	132	3486	74	4049	85
2949	121	3202	132	3500	86	4050	85
2950	121	3204	132	3502	88	4051	85
2951	121	3206	132	3504	88	4052	85
2952	121	3220	132	3506	88	4053	85
2953	121	3222	132	3508	88	4054	85
2954	121	3224	132	3520	88	4055	85
2955	121	3226	134	3522	88	4056	85
2956	121	3228	134	3524	88	4057	85
2957	121	3230	134	3526	88	4058	85
2958	121	3306	134	3540	110	4059	85
2959	121	3308	134	3542	110	4060	85
2960	121	3310	134	3544	110	4061	85
2961	121	3312	134	3546	110	4062	85
2962	121	3322	136	3560	110	4063	85
2963	121	3324	136	3562	110	4064	85
2964	121	3326	136	3564	110	4065	85
2965	121	3400	136	3566	110	4066	85
2967	121	3402	136	3600	130	4067	85
2980	121	3404	136	3602	130	4068	85
2981	121	3406	136	3604	130	4069	85
2982	121	3408	136	3606	130	4070	85
2983	121	3410	138	3620	130	4071	85
2984	121	3412	138	3622	132	4072	85
2985	121	3414	138	3624	132	4073	85
2986	121	3420	64	3626	132	4074	85
2987	121	3422	64	4035	85	4075	85
2988	121	3424	64	4036	85	4076	85
2989	121	3426	64	4037	85	4077	85
2990	121	3440	64	4038	85	4078	85
2991	121	3442	64	4039	85	4079	85

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4080	85	4290	125	4390	125	6231	128
4081	85	4291	125	4405	50	6232	128
4082	85	4292	125	4406	50	6234	128
4083	85	4293	125	4407	50	6235	128
4084	85	4294	125	4408	50	6236	130
4200	122	4295	125	4681	134	6237	130
4202	122	4296	125	4682	134	6238	130
4204	122	4297	125	4716	86	6299	70
4210	124	4298	125	4724	68	6315	130
4212	124	4299	125	4764	86	6316	130
4260	125	4300	125	4767	86	6318	128
4261	125	4301	125	4777	86	6334	86
4262	125	4302	125	4778	86	6335	86
4263	125	4303	125	4783	108	6336	86
4264	125	4304	125	4788	84	6337	86
4265	125	4305	125	4791	84	6353	108
4266	125	4306	125	4798	84	6354	108
4267	125	4307	125	4799	84	6356	106
4268	125	4308	125	4800	86	6369	26
4269	125	4309	125	4815	84	6372	140
4270	125	4310	125	4840	70	6794	32
4271	125	4311	125	4871	86	6795	32
4272	125	4312	125	4872	70	6796	32
4273	125	4313	125	4895	70	6797	34
4274	125	4314	125	4942	36	6798	34
4275	125	4315	125	4943	36	6799	34
4276	125	4316	125	4944	36	6801	34
4277	125	4317	125	4950	38	6802	34
4278	125	4318	125	4953	70	6803	34
4279	125	4319	125	4956	70	6804	34
4280	125	4380	125	5209	36	6870	638
4281	125	4381	125	6217	126	6873	26
4282	125	4382	125	6218	126	6874	28
4283	125	4383	125	6219	126	6941	28
4284	125	4384	125	6220	126	6942	28
4285	125	4385	125	6221	126	6991	140
4286	125	4386	125	6222	126	6992	140
4287	125	4387	125	6224	126	6993	140
4288	125	4388	125	6225	128	6994	140
4289	125	4389	125	6228	126	6995	140

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
6996	54						
6997	54						
6998	54						
6999	54						
7001	638						
7002	638						
7003	638						
7004	638						
7005	638						
7021	52						
7022	52						
7023	52						
7024	52						
7025	34						
7026	34						
7029	34						
7311	112						
7315	110						
7316	110						
7572	38						
7573	38						
7574	38						
7576	38						
7577	38						
7578	38						
7580	40						
7629	148						

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Additional Part Marking	140
Additional Requirements	138
Aperture Cards Required	28
Applicable Documents	140
Axial Internal Play	54
Axial Load Rating	30
Axial Strength Limit Load	56
Axial Strength Static Fracture Load	60
Ball Compliment	46
Ball Size	48
Ball Tolerance Conformance	48
Base Document	26
Bearing Contact Angle	50
Bearing Precision Tolerance	48
Bearing Preload	50
Bond Integrity (Adhesion)	62
City, State, Zip	26
Class	30
Classification	30
Company Name/Command	26
Composition	30
Compressive Strength	64
Configuration	38
Conformity (Spherical Bearings)	64
Contract Number/Office Symbol	26
Control, Source	26
Control, Specification	28
Date	26
Design and Construction	40
Design Reliability	34
Dust	68
End Washer Pushout	70
Equivalent Load	32
Fatigue Load (Rod End Bearings)	74
Finishes	40
Flexural Strength	72
Fluid Compatibility (Bearings with Liners	76
Format	26
Friction Torque	80

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Government Design Activity FSCM	26
Grade	30
Hardness	82
Humidity	84
Illustrations	38
Impact Strength	86
Lubrication of Voids	50
Materials	40
Maximum End Play	48
Maximum Outside Diameter Square with Side Runout	44
Maximum Parallelism of Sides	42
Maximum Raceway Curvature	52
Maximum Raceway Runout with Side	44
Maximum Radial Play	50
Maximum Radial Runout	40
Maximum Rolling Element Variation	44
Maximum Side Runout with Bore	42
Maximum Torque	48
Metals	40
Mounting Hardware	138
No-Load Breakaway Torque	90
Nomenclature	140
Notes	140
Oscillation Radial Load (Bearings with Liners)	92
Packaging	140
Part Marking	140
Part Number	28
Part Number Cross-Reference	140
Performance Characteristics	36
Phone Number	26
Pre-Lubricated Bearings	50
Quality Assurance Provisions	140
Radial Dynamic Load	96
Radial Internal Play	98
Radial Limit Load Rating	32

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

Page

Radial Load Rating - 30
Radial Static Fracture Load- 104
Radial Strength Limit Load - 100
Rated Radial Capacity- 32
Ratings - 30
Requester FSCM - 26
Requester's Name - 26
Revision of AEDPS Document (Number)- 28
Rod-End Shank Screw Threads- 46
Roller Compliment- 46

Salt Spray/Fog - 106
Scope - 28
Seal Retention - 108
Shear Strength - 110
Shock - 110
Source Table - 28
Stability- 112
Storage Conditions - 36
Street/Building- 26
Superseded Document- 140
Surface Concentricity- 114
Surface Lubrication- 50
Surface Parallelism- 116
Surface Perpendicularity - 120
Surface Texture- 122
System Application - 26

Tabulated Characteristics- 40
Temperature- 32
Temperature, High- 126
Temperature, Low - 128
Tensile Strength - 130
Thrust Limit Load Rating - 32
Type - 30

Ultimate Static Load - 132
Units of Measure - 28, 38

Vibration- 134

Weight - 52
Wobble - 136
Workmanship- 138

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET ___ OF ___

*TITLE CODE 1 2 3 4 5 6	*REQUESTER NO. 7 8 9 10 11 12	CHAR CODE 13 14 15 16
*REQUESTER'S NAME		Ø 1 Ø 1
*COMPANY NAME/COMMAND		Ø 1 Ø 2
*STREET/BUILDING		Ø 1 Ø 3
*CITY, STATE, ZIP		Ø 1 Ø 4
*PHONE NO. INCLUDE A/C AUTOVON IF APPLICABLE		Ø 1 Ø 5
*DATE		1 Ø Ø 3
*REQUESTER FSCM		1 Ø Ø 4
*CONTRACT NO./OFFICE SYMBOL		1 Ø Ø 5
*BASE DOCUMENT		1 Ø Ø 6
*SYSTEM APPLICATION		1 Ø Ø 8
*GOVERNMENT DESIGN ACTIVITY FSCM		6 3 6 9
*FORMAT SIX SECTION DOCUMENT.		Ø 7 Ø Ø
ONE SECTION DOCUMENT.		Ø 8 Ø Ø
SEARCH ONLY.		Ø 1 Ø 6
APERTURE CARDS REQUIRED.		Ø 1 Ø 7
REVISION OF AEDPS DOCUMENT NO.		Ø 1 Ø 8
*CONTROL SOURCE.		6 8 7 3
SPECIFICATION.		6 8 7 4
*SOURCE TABLE		9 1 5 1
UNIT OF MEASURE U.S.		6 9 4 1
SI.		6 9 4 2

CHARACTERISTIC VALUE

20 25 30 35 40 45 50 55 60 65 70 75

LINE NO. 79 80

PLEASE SUPPLY THE FOLLOWING:

DASH-NUMBERED PART _____ REV _____ NOTICE # _____

AS A FINAL CHECK, SCAN THE SRS FOR THE FOLLOWING COMMON ERRORS:

- ☐ MANDATORY CHARACTERISTIC CODES AND VALUES NOT SUPPLIED
- ☐ ZERO (Ø) WRITTEN WITHOUT VIRGULE (Ø)
- ☐ USE OF POUND SIGN (#) WITHOUT ACCOMPANYING CHARACTERISTIC VALUE
- ☐ POUND SIGN (#) OMITTED FROM END OF STATEMENT (CHARACTERISTIC VALUE)
- ☐ CHARACTERISTIC CODE USED MORE THAN ONCE (OTHER THAN MULTILINE STATEMENT)
- ☐ MULTILINE STATEMENT NOT NUMBERED IN COLUMN 80

*MANDATORY

DLA-DTD-35 [illegible]

171/172

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET ___ OF ___

TITLE CODE 1 2 3 4 5 6	REQUESTER NO. 7 8 9 10 11 12	CHAR CODE 13 14 15 16	CHARACTERISTIC VALUE 20 25 30 35 40 45 50 55 60 65 70 75 79	LINE NO. 80

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander,
U.S. Army Missile R & D Command
ATTN: DRDMI-ESD
Redstone A rsenal, Alabama 35809

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.