DOD-STD-35-25A(MI)
15 February 1979
SUPERSEDING
MIL-STD-35-25(MI)
17 DECEMBER 1973

MILITARY STANDARD

FILTERS, ELECTRONIC

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

FSC EDS

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Filters, Electronic
Automated Engineering
Document Preparation System

DOD-STD-35-25A(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-25A(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for Filters, Electronic.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	3
	2.1	Issues of documents	3
	2.2	Other publications	4
	3.	DEFINITIONS	5
	4.	GENERAL REQUIREMENTS	6
	4.1	Introduction	6
	4.2	Specification Requirement Sheet (SRS)	6
	4.3	Configuration	6
	4.3.1	Dimensions	6
	4.3.2	Illustrations	6
	4.4	Units of measure	6
	5.	DETAILED REQUIREMENTS	7
	5.1	Introduction	7
	5.2	MSE Formats	7
	5.3	Referenced documents	7
	5.4	Test matrix	7
	5.5	Tabulation	8
	5.6	Keyword Code Index (KCI) and Standard Paragraphs	11
	5.6.1	Interrelationship of Codes	11
	5.6.2	Automatic MSE Data	11
	5.6.3	DOD-STD-35 Tables	11

TABLES

Table	I.	Title Index	2
	II.	Test matrix	8
	III.	Tabulation candidates	9

APPENDICES

Appendix	A.	Illustrations	130
	B.	Characteristic Code Index	170
		Index	179

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the currenversion before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for Filters, Electronic.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. It is recommended that MIL-STD-1395, Selection and Use of Filters and Networks, be reviewed prior to using this dash-numbered part book.

The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
FILTER, RADIO INTERFERENCE	060001	MIL-F-12548	LOW PASS, HIGH PASS
		MIL-F-15733	GENL SPEC
		MIL-F-25562	RADAR BEACON INPUT FILTER
FILTER, ANTENNA	060002	MIL-F-18398	FILTER NETWORKS
FILTER ASSEMBLY	060003	MIL-F-5263	ACFT COMMS
FILTER, BANDPASS	060004	MIL-F-14136	KITS OF SELD RANGES
		MIL-F-14263	54.0-70.9 MEGAHERTZ
		MIL-F-18327	GENL SPEC
		MIL-F-25880	EQPT CPLG
		MIL-F-81150	TORPEDO USAGE
FILTER, BAND SUPPRESSION	060005	MIL-F-18327	GENL SPEC
		MIL-F-25880	EQPT CPLG
FILTER, DUAL FUNCTIONING	060006	MIL-F-18327	GENL SPEC
FILTER, HIGHPASS	060007	MIL-F-12548	RF
		MIL-F-18327	GENL SPEC
FILTER, LOWPASS	060008	MIL-F-12548	RF
		MIL-F-18327	GENL SPEC
		MIL-F-81154	TORPEDO USAGE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-F-15733	Filters, Radio Interference, General Specifications For
MIL-F-18327	Filters; High Pass, Low Pass, Band Pass, Band Suppression and Dual Functioning General Specification For
MIL-F-25880	Filter, Band Pass, Band Suppression F-339/A

STANDARDS

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-130	Identification Marking of U. S. Military Property
MIL-STD-202	Test Methods for Electronic and Electrical Parts
MIL-STD-1285	Marking of Electrical and Electronic Parts

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTME380	Metric Practice Guide
ASTMD92	Method of Test for Flash and Fire Points by Cleveland Open Cup

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currenversion before use.

3. DEFINITIONS

Definitions contained in DOD STD-35 are applicable to Filters, Electronic.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for Filters, Electronic, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered parts. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Filters, Electronic.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Filters, Electronic.

4.3.2 Illustrations. Illustrations applicable to Filters, Electronic are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Test matrix. A test matrix is supplied as a guide for selecting documents to specify tests (see table II). The test matrix presents documents most applicable for use to satisfy the statement "TEST PER (DOC DES)". Any document listed in the Title Index may be used to satisfy the statement. However, the selected document from the Title Index must contain the desired test. Government test method documents and approved industry standards such as ASTM test methods may also be used to satisfy the statement "TEST PER (DOC DES)".

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE II. TEST MATRIX.

DOCUMENT	TEST CODE	Insertion Loss 1694	Temperature Rise 1772
MIL-F-15733		X	X
MIL-F-18327		X	X

5.5 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table III provides codes for column headings which may be used for electronic filter characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
2800	INSERTION LOSS FREQUENCY KILOHERTZ	2809	INSERTION LOSS FREQUENCY KILOHERTZ	2818	INSERTION LOSS FREQUENCY KILOHERTZ
2827	INSERTION LOSS FREQUENCY KILOHERTZ	2836	INSERTION LOSS FREQUENCY KILOHERTZ	2845	INSERTION LOSS FREQUENCY KILOHERTZ
2854	INSERTION LOSS FREQUENCY KILOHERTZ	2863	INSERTION LOSS FREQUENCY MEGAHERTZ	2872	INSERTION LOSS FREQUENCY MEGAHERTZ
2881	INSERTION LOSS FREQUENCY MEGAHERTZ	2890	INSERTION LOSS FREQUENCY MEGAHERTZ	2899	INSERTION LOSS FREQUENCY MEGAHERTZ
2908	INSERTION LOSS FREQUENCY MEGAHERTZ	2917	INSERTION LOSS FREQUENCY MEGAHERTZ	2926	INSERTION LOSS FREQUENCY GIGAHERTZ
2935	INSERTION LOSS FREQUENCY GIGAHERTZ	2944	INSERTION LOSS FREQUENCY GIGAHERTZ	2953	INSERTION LOSS FREQUENCY GIGAHERTZ
2962	INSERTION LOSS FREQUENCY GIGAHERTZ	2971	INSERTION LOSS FREQUENCY GIGAHERTZ	2980	INSERTION LOSS FREQUENCY GIGAHERTZ
2801	INSERTION LOSS DECIBELS	2810	INSERTION LOSS DECIBELS	2819	INSERTION LOSS DECIBELS
2828	INSERTION LOSS DECIBELS	2837	INSERTION LOSS DECIBELS	2846	INSERTION LOSS DECIBELS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES. (CONT)

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
2855	INSERTION LOSS DECIBELS	2864	INSERTION LOSS DECIBELS	2873	INSERTION LOSS DECIBELS
2882	INSERTION LOSS DECIBELS	2891	INSERTION LOSS DECIBELS	2900	INSERTION LOSS DECIBELS
2909	INSERTION LOSS DECIBELS	2918	INSERTION LOSS DECIBELS	2927	INSERTION LOSS DECIBELS
2936	INSERTION LOSS DECIBELS	2945	INSERTION LOSS DECIBELS	2954	INSERTION LOSS DECIBELS
2963	INSERTION LOSS DECIBELS	2972	INSERTION LOSS DECIBELS	2981	INSERTION LOSS DECIBELS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

5.6 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type apnt covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.6.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.6.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.6.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applidable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT	0700
ONE SECTION DOCUMENT	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT):	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6874	THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).
0107	
0108	0108.
	SCOPE.
	SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.
	PART NUMBER. THE PART NUMBER FOR THE ITME IS SUPPLIED BY COMPUTER.
	PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.
6941	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.
6942	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIIFED.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE RATING	
MAXIMUM OPERATING (DEGREES CELSIUS)	5069
MAXIMUM NONOPERATING (DEGREES CELSIUS)	5071
MAXIMUM STORAGE (DEGREES CELSIUS)	7302
MAXIMUM SERVICE (DEGREES CELSIUS)	4905
MAXIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5054
MINIMUM OPERATING (DEGREES CELSIUS)	5068
MINIMUM NONOPERATING (DEGREES CELSIUS)	5070
MINIMUM STORAGE (DEGREES CELSIUS)	7301
MINIMUM SERVICE (DEGREES CELSIUS)	4904
MINIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5052
NOMINAL OPERATING (DEGREES CELSIUS)	5046
NOMINAL STORAGE (DEGREES CELSIUS)	5048

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	TEMPERATURE RATING.
5069	THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS.
5071	THE MAXIMUM NONOPERATING TEMPERATURE RATING SAHLL BE 5071 DEGREES CELSIUS.
7302	THE MAXIMUM STORAGE TEMPERATURE RATING SAHLL BE 7302 DEGREES CELSIUS.
4905	THE MAXIMUM SERVICE TEMPERATURE RATING SHALL BE 4905 DEGREES CELSIUS.
5054	THE MAXIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5054 DEGREES CELSIUS.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.
5070	THE MINIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5070 DEGREES CELSIUS.
7301	THE MINIMUM STORAGE TEMPERATURE RATING SHALL BE 7301 DEGREES CELSIUS.
4904	THE MINIMUM SERVICE TEMPERATURE RATING SHALL BE 4904 DEGREES CELSIUS.
5052	THE MINIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5052 DEGREES CELSIUS.
5046	THE NOMINAL OPERATING TEMPERATURE RATING SHALL BE 5046 DEGREES CELSIUS.
5048	THE NOMINAL STORAGE TEMPERATURE RATING SHALL BE 5048 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CURRENT RATING	
MINIMUM CURRENT (SELECT ONE)	
(AMPERES)	7591
(MILLIAMPERES)	7592
MAXIMUM CURRENT (SELECT ONE)	
(AMPERES)	7594
(MILLIAMPERES)	7595
NOMINAL CURRENT (SELECT ONE)	
(AMPERES)	7597
(MILLIAMPERES)	7598
POWER RATING	
MINIMUM POWER (SELECT ONE)	
(WATTS)	7631
(KILOWATTS)	7632
(MILLIWATTS)	7633
(VOLTAMPERES)	7645
MAXIMUM POWER (SELECT ONE)	
(WATTS)	7634
(KILOWATTS)	7635
(MILLIWATTS)	7636
(VOLTAMPERES)	7646

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CURRENT RATING.
7591	THE MINIMUM CURRENT RATING SHALL BE 7591 AMPERE(S).
7592	THE MINIMUM CURRENT RATING SHALL BE 7592 MILLIAMPERE(S).
7594	THE MAXIMUM CURRENT RATING SHALL BE 7594 AMPERE(S).
7595	THE MAXIMUM CURRENT RATING SHALL BE 7595 MILLIAMPERE(S).
7597	THE NOMINAL CURRENT RATING SHALL BE 7597 AMPERE(S).
7598	THE NOMINAL CURRENT RATING SHALL BE 7598 MILLIAMPERE(S).
	POWER RATING.
7631	THE MINIMUM POWER RATING SHALL BE 7631 WATT(S).
7632	THE MINIMUM POWER RATING SHALL BE 7632 KILOWATT(S).
7633	THE MINIMUM POWER RATING SHALL BE 7633 MILLIWATT(S).
7645	THE MINIMUM POWER RATING SHALL BE 7645 VOLTAMPERE(S).
7634	THE MAXIMUM POWER RATING SHALL BE 7634 WATT(S).
7635	THE MAXIMUM POWER RATING SHALL BE 7635 KILOWATT(S).
7636	THE MAXIMUM POWER RATING SHALL BE 7636 MILLIWATT(S).
7646	THE MAXIMUM POWER RATING SHALL BE 7646 VOLTAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
POWER RATING (CONT)	
NOMINAL POWER (SELECT ONE)	
(WATTS)	7637
(KILOWATTS)	7638
(MILLIWATTS)	7639
(VOLTAMPERES)	7647
VOLTAGE RATING	
MINIMUM VOLTAGE (SELECT ONE)	
VOLTS	
(VOLTS AC)	7600
(VOLTS DC)	7601
(VOLTS RMS)	7602
MILLIVOLTS	
(MILLIVOLTS AC)	7603
(MILLIVOLTS DC)	7604
(MILLIVOLTS RMS)	7605
MAXIMUM VOLTAGE (SELECT ONE)	
VOLTS	
(VOLTS AC)	7609
(VOLTS DC)	7610
(VOLTS RMS)	7611

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7637	THE NOMINAL POWER RATING SHALL BE 7637 WATT(S).
7638	THE NOMINAL POWER RATING SHALL BE 7638 KILOWATT(S).
7639	THE NOMINAL POWER RATING SHALL BE 7639 MILLIWATT(S).
7647	THE NOMINAL POWER RATING SHALL BE 7647 VOLTAMPERE(S).
	VOLTAGE RATING.
7600	THE MINIMUM VOLTAGE RATING SHALL BE 7600 VOLT(S) AC.
7601	THE MINIMUM VOLTAGE RATING SHALL BE 7601 VOLT(S) DC.
7602	THE MINIMUM VOLTAGE RATING SHALL BE 7602 VOLT(S) RMS.
7603	THE MINIMUM VOLTAGE RATING SHALL BE 7603 MILLIVOLT(S) AC.
7604	THE MINIMUM VOLTAGE RATING SHALL BE 7604 MILLIVOLT(S) DC.
7605	THE MINIMUM VOLTAGE RATING SHALL BE 7605 MILLIVOLT(S) RMS.
7609	THE MAXIMUM VOLTAGE RATING SHALL BE 7609 VOLT(S) AC.
7610	THE MAXIMUM VOLTAGE RATING SHALL BE 7610 VOLT(S) DC.
7611	THE MAXIMUM VOLTAGE RATING SHALL BE 7611 VOLT(S) RMS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VOLTAGE RATING (CONT)	
MAXIMUM VOLTAGE (CONT)	
MILLIVOLTS	
(MILLIVOLTS AC)	7612
(MILLIVOLTS DC)	7613
(MILLIVOLTS RMS)	7614
NOMINAL VOLTAGE (SELECT ONE)	
VOLTS	
(VOLTS AC)	7618
(VOLTS DC)	7619
(VOLTS RMS)	7620
MILLIVOLTS	
(MILLIVOLTS AC)	7621
(MILLIVOLTS DC)	7622
(MILLIVOLTS RMS)	7623
FREQUENCY RATING (SELECT ONE)	
(HERTZ)	7627
(MEGAHERTZ)	7628
(KILOHERTZ)	7641

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7612	THE MAXIMUM VOLTAGE RATING SHALL BE 7612 MILLIVOLT(S) AC.
7613	THE MAXIMUM VOLTAGE RATING SHALL BE 7613 MILLIVOLT(S) DC.
7614	THE MAXIMUM VOLTAGE RATING SHALL BE 7614 MILLIVOLT(S) RMS.
7618	THE NOMINAL VOLTAGE RATING SHALL BE 7618 VOLT(S) AC.
7619	THE NOMINAL VOLTAGE RATING SHALL BE 7619 VOLT(S) DC.
7620	THE NOMINAL VOLTAGE RATING SHALL BE 7620 VOLT(S) RMS.
7621	THE NOMINAL VOLTAGE RATING SHALL BE 7621 MILLIVOLT(S) AC.
7622	THE NOMINAL VOLTAGE RATING SHALL BE 7622 MILLIVOLT(S) DC.
7623	THE NOMINAL VOLTAGE RATING SHALL BE 7623 MILLIVOLT(S) RMS.
	FREQUENCY RATING.
7627	THE FREQUENCY RATING SHALL BE 7627 HERTZ.
7628	THE FREQUENCY RATING SHALL BE 7628 MEGAHERTZ.
7641	THE FREQUENCY RATING SHALL BE 7641 KILOHERTZ.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ALTITUDE RATING	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5060
SEA LEVEL TO (METERS)	5061
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5062
SEA LEVEL TO (METERS)	5063
CLASSIFICATION	
TYPE (DESIGNATION)	1562
STYLE (DESIGNATION)	1564
CURRENT RATING (DESIGNATION)	1566
INSERTION LOSS CHARACTERISTIC (DESIGNATION)	1568
TERMINAL TYPE AND DIMENSION (DESIGNATION)	1570
OPERATING TEMPERATURE RANGE (DESIGNATION)	1572
GRADE (DESIGNATION)	1574

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ALTITUDE RATING.
5060	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5060 FEET.
5061	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5961 METERS.
5062	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5062 FEET.
5063	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5063 METERS.
	CLASSIFICATION.
1562	THE TYPE DESIGNATION SHALL BE 1562 IN ACCORDANCE WITH THE BASE DOCUMENT.
1564	THE STYLE DESIGNATION SHALL BE 1564 IN ACCORDANCE WITH THE BASE DOCUMENT.
1566	THE CURRENT RATING DESIGNATION SHALL BE 1566 IN ACCORDANCE WITH THE BASE DOCUMENT
1568	THE INSERTION LOSS CHARACTERISTIC SHALL BE 1568 IN ACCORDANCE WITH THE BASE DOCUMENT.
1570	THE TERMINAL TYPE AND DIMENSION DESIGNATION SHALL BE 1570 IN ACCORDANCE WITH THE BASE DOCUMENT.
1572	THE OPERATING TEMPERATURE RANGE DESIGNATION SHALL BE 1572 IN ACCORDANCE WITH THE BASE DOCUMENT.
1574	THE GRADE DESIGNATION SHALL BE 1574 IN ACCORDANCE WITH THE BASE DOCUMENT.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION (CONT)	
OTHER ____	1576
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
*UNITS (SELECT ONE)	
U.S.	
INCHES.	7572
SI (SELECT ONE)	
CENTIMETERS.	7576
MILLIMETERS.	7577
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950

NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR. CODE	STANDARD PARAGRAPH
1576	THE CLASSIFICATION DESIGNATION SHALL BE 1576 IN ACCORDANCE WITH THE BASE DOCUMENT.
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7576	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN CENTIMETERS OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	
MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE IX IS USED.	
METALS	
DISSIMILAR METALS.	7580

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
	FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
7580	METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION	
ENCLOSURE (SELECT ONE)	
ENCASED.	1578
ENCAPSULATED.	1580
HERMETICALLY SEALED.	1582
OTHER ____	1584
MOUNTING MEANS (SELECT ONE)	
BRACKET.	1586
THREADED STUD.	1588
THREADED INSERT.	1590
PRINTED CIRCUIT.	1592
THREADED BUSHING.	1594
EYELET.	1596
OTHER ____	1598

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	DESIGN AND CONSTRUCTION.
1578	ENCLOSURE. THE ITEM(S) SHALL BE ENCASED.
1580	ENCLOSURE. THE ITEM(S) SHALL BE ENCAPSULATED.
1582	ENCLOSURE. THE ITEM(S) SHALL BE HERMETICALLY SEALED.
1584	ENCLOSURE. THE ITEM(S) SHALL BE 1584.
1586	MOUNTING MEANS. THE ITEM(S) SHALL BE MOUNTED BY MEANS OF A BRACKET.
1588	MOUNTING MEANS. THE ITEM(S) SHALL BE MOUNTED BY MEANS OF A THREADED STUD.
1590	MOUNTING MEANS. THE ITEM(S) SHALL BE MOUNTED BY MEANS OF A THREADED INSERT.
1592	MOUNTING MEANS. THE ITEM(S) SHALL BE MOUNTED BY MEANS OF A PRINTED CIRCUIT.
1594	MOUNTING MEANS. THE ITEM(S) SHALL BE MOUNTED BY MEANS OF A THREADED BUSHING.
1596	MOUNTING MEANS. THE ITEM(S) SHALL BE MOUNTED BY MEANS OF AN EYELET.
1598	MOUNTING MEANS. THE ITEM(S) SHALL BE MOUNTED BY MEANS OF 1598.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
NUMBER OF SECTIONS (CIRCUITS)	
(QUANTITY)	1600
CIRCUIT CONFIGURATION (SELECT ONE)	
L TYPE.	1602
PI TYPE.	1604
T TYPE.	1606
OTHER ____	1608
WEIGHT	
MAXIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1600	NUMBER OF SECTIONS (CIRCUITS). THERE SHALL BE 1600 SECTION(S) (CIRCUIT(S)).
1602	CIRCUIT CONFIGURATION. THE CIRCUIT CONFIGURATION SHALL BE L TYPE.
1604	CIRCUIT CONFIGURATION. THE CIRCUIT CONFIGURATION SHALL BE PI TYPE.
1606	CIRCUIT CONFIGURATION. THE CIRCUIT CONFIGURATION SHALL BE T TYPE.
1608	CIRCUIT CONFIGURATION. THE CIRCUIT CONFIGURATION SHALL BE 1608.
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7023	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
MAXIMUM WEIGHT PER UNIT (CONT)	
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024
NOMINAL WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	6996
(POUNDS)	6997
SI (SELECT ONE)	
(GRAMS)	6998
(KILOGRAMS)	6999

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7021	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).
6996	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6996 OUNCE(S).
6997	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6997 POUND(S).
6998	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6998 GRAM(S).
6999	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6999 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELECTRICAL CHARACTERISTICS	
PER ELECTRICAL CHARACTERISITCS TABLE.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

ELECTRICAL CHARACTERISTICS. THE ELECTRICAL CHARACTERISTICS SHALL BE IN ACCORDANCE WITH THE ELECTRICAL CHARACTERISTICS TABLE.

ELECTRICAL CHARACTERISTICS TABLE

CHARACTERISTIC		1	2	3	4
SOURCE IMPEDANCE	(OHMS)	3000	3001	3002	3003
LOAD IMPEDANCE	(OHMS)	3004	3005	3006	3007
REFERENCE FREQUENCY	(HERTZ)	3008	3009	3010	3011
REFERENCE FREQUENCY	(KILOHERTZ)	3012	3013	3014	3015
REFERENCE FREQUENCY	(MEGAHERTZ)	3016	3017	3018	3019
REFERENCE FREQUENCY	(GIGAHERTZ)	3020	3021	3022	3023
INSERTION LOSS	(DECIBELS)	3024	3025	3026	3027
MINIMUM DISCRIMINATION	(DECIBELS)	3028	3029	3030	3031
FREQUENCY RANGE	(KILOHERTZ)	3032	3033	3034	3035
FREQUENCY RANGE	(MEGAHERTZ)	3036	3037	3038	3039
FREQUENCY RANGE	(GIGAHERTZ)	3040	3041	3042	3043
MAXIMUM DISCRIMINATION	(DECIBELS)	3044	3045	3046	3047
FREQUENCY RANGE	(KILOHERTZ)	3048	3049	3050	3051
FREQUENCY RANGE	(MEGAHERTZ)	3052	3053	3054	3055
FREQUENCY RANGE	(GIGAHERTZ)	3056	3057	3058	3059
OPERATING VOLTAGE	(VOLTS DC)	3060	3061	3062	3063
OPERATING VOLTAGE	(VOLTS AC)	3064	3065	3066	3067
CUTOFF FREQUENCY	(HERTZ)	3068	3069	3070	3071
CUTOFF FREQUENCY	(KILOHERTZ)	3072	3073	3074	3075
CUTOFF FREQUENCY	(MEGAHERTZ)	3076	3077	3078	3079
PASSBAND (BANDWIDTH)	(HERTZ)	3080	3081	3082	3083
PASSBAND (BANDWIDTH)	(KILOHERTZ)	3084	3085	3086	3087
PASSBAND (BANDWIDTH)	(MEGAHERTZ)	3088	3089	3090	3091
PASSBAND (BANDWIDTH)	(PERCENT)	3092	3093	3094	3095
PASSBAND RESPONSE VARIATION (RIPPLE)	(DECIBELS)	3096	3097	3098	3099
FREQUENCY RANGE	(HERTZ)	3100	3101	3102	3103
FREQUENCY RANGE	(KILOHERTZ)	3104	3105	3106	3107
FREQUENCY RANGE	(MEGAHERTZ)	3108	3109	3110	3111
STOP BAND	(HERTZ)	3112	3113	3114	3115
STOP BAND	(KILOHERTZ)	3116	3117	3118	3119
STOP BAND	(MEGAHERTZ)	3120	3121	3122	3123

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELECTRICAL CHARACTERISTICS (CONT)	
PER ELECTRICAL CHARACTERISTICS TABLE. (CONT)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

ELECTRICAL CHARACTERISTICS TABLE (CONT)

CHARACTERISTIC		1	2	3	4
SHAPE FACTOR		3124	3125	3126	3127
DC RESISTANCE	(OHMS)	3128	3129	3130	3131
VOLTAGE DROP	(VOLTS)	3132	3133	3134	3135
CENTER FREQUENCY	(HERTZ)	3136	3137	3138	3139
CENTER FREQUENCY	(KILOHERTZ)	3140	3141	3142	3143
CENTER FREQUENCY	(MEGAHERTZ)	3144	3145	3146	3147
CENTER FREQUENCY	(GIGAHERTZ)	3148	3149	3150	3151
INPUT IMPEDANCE	(OHMS)	3152	3153	3154	3155
OUTPUT IMPEDANCE	(OHMS)	3156	3157	3158	3159
DUTY CYCLE	(PERCENT)	3160	3161	3162	3163
PEAK TRANSIENT VOLTAGE	(VOLTS)	3164	3165	3166	3167
3168		3169	3170	3171	3172
3173		3174	3175	3176	3177
3178		3179	3180	3181	3182
3183		3184	3185	3186	3187
3188		3189	3190	3191	3192
3193		3194	3195	3196	3197

ELECTRICAL CHARACTERISTICS TABLE (CONT)

CHARACTERISTIC		5	6	7	8
SOURCE IMPEDANCE	(OHMS)	3200	3201	3202	3203
LOAD IMPEDANCE	(OHMS)	3204	3205	3206	3207
REFERENCE FREQUENCY	(HERTZ)	3208	3209	3210	3211
REFERENCE FREQUENCY	(KILOHERTZ)	3212	3213	3214	3215
REFERENCE FREQUENCY	(MEGAHERTZ)	3216	3217	3218	3219
REFERENCE FREQUENCY	(GIGAHERTZ)	3220	3221	3222	3223
INSERTION LOSS	(DECIBELS)	3224	3225	3226	3227
MINIMUM DISCRIMINATION	(DECIBELS)	3228	3229	3230	3231
FREQUENCY RANGE	(KILOHERTZ)	3232	3233	3234	3235
FREQUENCY RANGE	(MEGAHERTZ)	3236	3237	3238	3239
FREQUENCY RANGE	(GIGAHERTZ)	3240	3241	3242	3243
MAXIMUM DISCRIMINATION	(DECIBELS)	3244	3245	3246	3247
FREQUENCY RANGE	(KILOHERTZ)	3248	3249	3250	3251
FREQUENCY RANGE	(MEGAHERTZ)	3252	3253	3254	3255

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELECTRICAL CHARACTERISTICS (CONT)	
PER ELECTRICAL CHARACTERISTICS TABLE. (CONT)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

ELECTRICAL CHARACTERISTICS TABLE (CONT)

CHARACTERISTIC		5	6	7	8
FREQUENCY RANGE	(GIGAHERTZ)	3256	3257	3258	3259
OPERATING VOLTAGE	(VOLTS DC)	3260	3261	3262	3263
OPERATING VOLTAGE	(VOLTS AC)	3264	3265	3266	3267
CUTOFF FREQUENCY	(HERTZ)	3268	3269	3270	3271
CUTOFF FREQUENCY	(KILOHERTZ)	3272	3273	3274	3275
CUTOFF FREQUENCY	(MEGAHERTZ)	3276	3277	3278	3279
PASSBAND (BANDWIDTH)	(HERTZ)	3280	3281	3282	3283
PASSBAND (BANDWIDTH)	(KILOHERTZ)	3284	3285	3286	3287
PASSBAND (BANDWIDTH)	(MEGAHERTZ)	3288	3289	3290	3291
PASSBAND (BANDWIDTH)	(PERCENT)	3292	3293	3294	3295
PASSBAND RESPONSE VARIATION (RIPPLE)	(DECIBELS)	3296	3297	3298	3299
FREQUENCY RANGE	(HERTZ)	3300	3301	3302	3303
FREQUENCY RANGE	(KILOHERTZ)	3304	3305	3306	3307
FREQUENCY RANGE	(MEGAHERTZ)	3308	3309	3310	3311
STOP BAND	(HERTZ)	3312	3313	3314	3315
STOP BAND	(KILOHERTZ)	3316	3317	3318	3319
STOP BAND	(MEGAHERTZ)	3320	3321	3322	3323
SHAPE FACTOR		3324	3325	3326	3327
DC RESISTANCE	(OHMS)	3328	3329	3330	3331
VOLTAGE DROP	(VOLTS)	3332	3333	3334	3335
CENTER FREQUENCY	(HERTZ)	3336	3337	3338	3339
CENTER FREQUENCY	(KILOHERTZ)	3340	3341	3342	3343
CENTER FREQUENCY	(MEGAHERTZ)	3344	3345	3346	3347
CENTER FREQUENCY	(GIGAHERTZ)	3348	3349	3350	3351
INPUT IMPEDANCE	(OHMS)	3352	3353	3354	3355
OUTPUT IMPEDANCE	(OHMS)	3356	3357	3358	3359
DUTY CYCLE	(PERCENT)	3360	3361	3362	3363
PEAK TRANSIENT VOLTAGE	(VOLTS)	3364	3365	3366	3367
3168		3368	3369	3370	3371
3173		3372	3373	3374	3375
3178		3376	3377	3378	3379
3183		3380	3381	3382	3383
3188		3384	3385	3386	3387
3193		3388	3389	3390	3391

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELECTRICAL CHARACTERISTICS (CONT)	
PER ELECTRICAL CHARACTERISTICS TABLE. (CONT)	
ACCELERATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6272
NO EVIDENCE OF PHYSICAL DAMAGE.	6273
REMAIN WITHIN SPECIFIED TOLERANCE.	6277
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6250
PER MIL-STD-202, METHOD 212.	6251

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE STANDARD PARAGRAPH

ELECTRICAL CHARACTERISTICS TABLE (CONT)

NOTE A: 3394.

NOTE B: 3395.

NOTE C: 3396.

NOTE D: 3397.

NOTE E: 3398.

6272 ACCELERATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6272.

6273 ACCELERATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

6277 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

6250 ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENTS, EXCEPT 6250.

6251 ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 212 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATION (CONT)	
PER MIL-STD-202, METHOD 212. (CONT)	
*TEST CONDITION LETTER (SELECT ONE)	
TEST CONDITION LETTER A.	6226
*LEVEL (SELECT ONE)	
20 G'S.	4863
50 G'S.	4864
100 G'S.	4865
TEST CONDITION LETTER B.	6233
*LEVEL (SELECT ONE)	
10,000 G'S.	4868
20,000 G'S.	4892
DIRECTION (SELECT ONE)	
ONE DIRECTION.	1557
BOTH DIRECTIONS.	1558
TEST CONDITION LETTER C.	6239
*LEVEL (G'S.)	4893
MOUNTING (SELECT ONE)	
MOUNT BY ANY SUITABLE METHOD.	6263
MOUNT BY NORMAL METHOD.	6264
MOUNT PER DOCUMENT (DOC DES)	6265
PERCENT RATED LOAD APPLIED (PERCENT)	6210

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6226	TEST CONDITION LETTER A SHALL APPLY.
4863	THE TEST LEVEL SHALL BE 20 G'S.
4864	THE TEST LEVEL SHALL BE 50 G'S.
4865	THE TEST LEVEL SHALL BE 100 G'S.
6233	TEST CONDITION LETTER B SHALL APPLY.
4868	THE TEST LEVEL SHALL BE 10,000 G'S.
4892	THE TEST LEVEL SHALL BE 20,000 G'S.
1557	THE SPECIMEN SHALL BE ACCELERATED IN ONE DIRECTION ONLY.
1558	THE SPECIMEN SHALL BE ACCELERATED IN BOTH DIRECTIONS.
6239	TEST CONDITION LETTER C SHALL APPLY.
4893	THE TEST LEVEL SHALL BE 4893 G'S.
6263	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
6264	MOUNTING SHALL BE BY THE NORMAL METHOD.
6265	MOUNTING SHALL BE IN ACCORDANCE WITH 6265.
6210	THE ELECTRICAL LOAD SHALL BE 6210 PERCENT OF THE RATED LOAD.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CAPACITANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1609
AS FOLLOWS:	1611
MAXIMUM CAPACITANCE (SELECT ONE)	
(PICOFARADS)	1613
(MICROFARADS)	1615
CAPACITANCE (SELECT ONE)	
(PICOFARADS)	1617
(MICROFARADS)	1619
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1621
PER MIL-STD-202, METHOD 305.	1623
TEST FREQUENCY (SELECT ONE)	
(HERTZ)	1625
(KILOHERTZ)	1627
(MEGAHERTZ)	1629
MAGNITUDE OF POLARIZING VOLTAGE (VOLTS, DC)	1631

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1609	CAPACITANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1609.
1611	CAPACITANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1613	THE CAPACITANCE SHALL BE NOT GREATER THAN 1613 PICOFARADS.
1615	THE CAPACITANCE SHALL BE NOT GREATER THAN 1615 MICROFARADS.
1617	THE CAPACITANCE SHALL BE 1617 PICOFARADS.
1619	THE CAPACITANCE SHALL BE 1619 MICROFARADS.
1621	CAPACITANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1621.
1623	CAPACITANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 305 OF MIL-STD-202.
1625	THE TEST FREQUENCY SHALL BE 1625 HERTZ.
1627	THE TEST FREQUENCY SHALL BE 1627 KILOHERTZ.
1629	THE TEST FREQUENCY SHALL BE 1629 MEGAHERTZ.
1631	THE MAGNITUDE OF THE POLARIZING VOLTAGE SHALL BE 1631 VOLTS, DC.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CAPACITANCE (CONT)	
MAGNITUDE OF POLARIZING VOLTAGE (CONT)	
PLUS VOLTAGE TOLERANCE (VOLTS, DC)	1633
MINUS VOLTAGE TOLERANCE (VOLTS, DC)	1635
MEASUREMENT ACCURACY (SELECT ONE)	
(PERCENT)	1637
(PICOFARADS)	1639
POINTS OF MEASUREMENT (SELECT ONE)	
TERMINAL TO GROUND.	1641
OTHER ____	1643
DC RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1610
PER ELECTRICAL CHARACTERISTICS TABLE.	1612
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1614
PER MIL-STD-202, METHOD 303.	1616

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1633	THE PLUS VOLTAGE TOLERANCE SHALL BE 1633 VOLTS, DC.
1635	THE MINUS VOLTAGE TOLERANCE SHALL BE 1635 VOLTS, DC.
1637	THE ACCURACY OF THE MEASUREMENTS SHALL BE 1637 PERCENT.
1639	THE ACCURACY OF THE MEASUREMENTS SHALL BE 1639 PICOFARADS.
1641	THE POINTS OF MEASUREMENT SHALL BE TERMINAL TO GROUND.
1643	THE POINTS OF MEASUREMENT SHALL BE 1643.
1610	DC RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1610.
1612	DC RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE ELECTRICAL CHARACTERISTICS TABLE.
1614	DC RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1614.
1616	DC RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 303 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DC RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 303. (CONT)	
LIMIT OF ERROR OF MEASURING APPARATUS (PERCENT)	1618
TEST VOLTAGE (VOLTS DC)	1620
MAXIMUM PERIOD OF UNINTERRUPTED VOLTAGE (SECONDS)	1622
POINT(S) OF MEASUREMENT ____	1624
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4908
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4906
MAXIMUM LEAKAGE CURRENT (MILLIAMPERES)	4894
REMAIN WITHIN SPECIFIED TOLERANCE.	4901
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4884

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
1618	THE LIMIT OF ERROR OF THE MEASURING APPARATUS SHALL BE 1618 PERCENT.
1620	THE TEST VOLTAGE SHALL BE 1620 VOLTS, DC.
1622	THE PERIOD OF UNINTERRUPTED VOLTAGE SHALL BE NOT GREATER THAN 1622 SECONDS.
1624	POINT(S) OF MEASUREMENT SHALL BE 1624.
4908	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4908.
4906	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4894	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4894 MILLIAMPERE(S).
4901	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4884	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4884.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 301.	6300
*ALTITUDE PER METHOD 105 OF MIL-STD-202	
*TEST CONDITION (LETTER)	4886
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4885
(VOLTS, AC)	4849
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	6311
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	6312
BETWEEN MUTUALLY INSULATED PARTS.	6292
BETWEEN ALL INSULATED PARTS AND GROUND.	6293
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	6294
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4859

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6300	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.
4886	ALTITUDE SHALL BE IN ACCORDANCE WITH TEST CONDITION LETTER 4886 OF METHOD 105 OF MIL-STD-202.
4885	TEST VOLTAGE SHALL BE 4885 VOLTS, DC.
4849	TEST VOLTAGE SHALL BE 4849 VOLTS, AC.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
6311	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
6312	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
6292	BETWEEN MUTUALLY INSULATED PARTS.
6293	BETWEEN ALL INSULATED PARTS AND GROUND.
6294	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
4859	SPECIAL PREPARATION SHALL BE IN ACCORDANCE WITH 4859.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
DURATION OF VOLTAGE APPLICATION (SECONDS)	4891
MOUNTING PER DOCUMENT (DOC DES)	6280
REGULATION OF TEST VOLTAGE (PERCENT)	6308
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4900
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4902
(MILLIAMPERES)	6310
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4874
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4856
MAXIMUM CURRENT LEAKAGE MILLIAMPERE(S)	4875
REMAIN WITHIN SPECIFIED TOLERANCE.	4847

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4891	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4891 SECOND(S).
6280	MOUNTING SHALL BE IN ACCORDANCE WITH 6280.
6308	REGULATION OF THE TEST VOLTAGE SHALL BE WITHIN 6308 PERCENT.
4900	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4900 KILOVOLTAMPERE(S).
4902	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4902 AMPERE(S).
6310	THE SURGE CURRENT SHALL BE NOT GREATER THAN 6310 MILLIAMPERE(S).
4874	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.
4856	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4875	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4875 MILLIAMPERE(S).
4847	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT.)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4861
PER MIL-STD-202, METHOD 301.	4862
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4854
(VOLTS, AC)	4855
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	4842
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	4848
BETWEEN MUTUALLY INSULATED PARTS.	4844
BETWEEN ALL INSULATED PARTS AND GROUND.	4845
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	4846
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4850
DURATION OF VOLTAGE APPLICATION (SECONDS)	4867

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4861	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861:
4862	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.
4854	TEST VOLTAGE SHALL BE 4854 VOLTS, DC.
4855	TEST VOLTAGE SHALL BE 4855 VOLTS, AC.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
4842	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
4848	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
4844	BETWEEN MUTUALLY INSULATED PARTS.
4845	BETWEEN ALL INSULATED PARTS AND GROUND.
4846	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
4850	SPECIAL PREPARATION OR CONDITIONS SHALL BE IN ACCORDANCE WITH 4850.
4867	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4867 SECOND(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
MOUNTING PER DOCUMENT (DOC DES)	5000
REGULATION OF TEST VOLTAGE (PERCENT)	4869
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4870
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4717
(MILLIAMPERES)	4897
METHOD OF VOLTAGE CONNECTION PER DOCUMENT (DOC DES)	6267
DISCRIMINATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1626
PER ELECTRICAL CHARACTERISTICS TABLE.	1628
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1630

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
5000	MOUNTING SHALL BE IN ACCORDANCE WITH 5000.
4869	REGULATION OF TEST VOLTAGE SHALL BE WITHIN 4869 PERCENT.
4870	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4870 KILOVOLTAMPERE(S).
4717	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4717 AMPERE(S).
4897	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4897 MILLIAMPERE(S).
6267	METHOD OF CONNECTION OF TEST VOLTAGE SHALL BE IN ACCORDANCE WITH 6267.
1626	DISCRIMINATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1626.
1628	DISCRIMINATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE ELECTRICAL CHARACTERISTICS TABLE.
1630	DISCRIMINATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1630.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DISCRIMINATION (CONT)	
TEST METHODS (CONT)	
PER MIL-F-18327.	1632
TEST FREQUENCY (SELECT ONE)	
(HERTZ)	1634
(KILOHERTZ)	1636
(MEGAHERTZ)	1638
(GIGAHERTZ)	1640
FLAMMABILITY (EXTERNAL FLAME)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1642
AS FOLLOWS:	1644
MAXIMUM FLAME DURATION (SELECT ONE)	
(SECONDS)	1646
(MINUTES)	1648
NO VISIBLE FLAME.	1650
NO DRIPPING OF FLAMING MATERIAL.	1652
NO VIOLENT BURNING.	1654
NO EXPLOSION.	1656

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1632	DISCRIMINATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-18327.
1634	THE TEST FREQUENCY SHALL BE 1634 HERTZ.
1636	THE TEST FREQUENCY SHALL BE 1636 KILOHERTZ.
1638	THE TEST FREQUENCY SHALL BE 1638 MEGAHERTZ.
1640	THE TEST FREQUENCY SHALL BE 1640 GIGAHERTZ.
1642	FLAMMABILITY (EXTERNAL FLAME). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1642.
1644	FLAMMABILITY (EXTERNAL FLAME). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1646	THE TIME FOR BURNING OF VISIBLE FLAME FROM SPECIMEN SHALL BE NOT GREATER THAN 1646 SECONDS.
1648	THE TIME FOR BURNING OF VISIBLE FLAME FROM SPECIMEN SHALL BE NOT GREATER THAN 1648 MINUTES.
1650	THERE SHALL BE NO BURNING OF VISIBLE FLAME FROM THE SPECIMEN.
1652	THERE SHALL BE NO DRIPPING OF FLAMING MATERIAL.
1654	THERE SHALL BE NO VIOLENT BURNING.
1656	THERE SHALL BE NO EXPLOSION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLAMMABILITY (EXTERNAL FLAME) (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1658
PER MIL-STD-202, METHOD 111.	1660
AXIS OF FLAME (AXIS)	1662
POINT OF FLAME IMPINGEMENT (LOCATION)	1664
FLAME APPLICATION DURATION (SELECT ONE)	
(SECONDS)	1666
(MINUTES)	1668
FLASHPOINT OF IMPREGNANT OR POTTING COMPOUND	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1670
MINIMUM FLASHPOINT (DEGREES CELSIUS)	1672
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1674
PER ASTMD92.	1676

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1658	FLAMMABILITY (EXTERNAL FLAME). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1658.
1660	FLAMMABILITY (EXTERNAL FLAME). TESTING SHALL BE PERFORMED IN ACCORDANCE WTIH MIL-STD-202, METHOD 111.
1662	THE AXIS OF THE FLAME SHALL BE 1662.
1664	THE POINT OF IMPINGEMENT OF THE APPLIED FLAME SHALL BE 1664.
1666	THE DURATION OF THE APPLIED FLAME SHALL BE 1666 SECONDS.
1668	THE DURATION OF THE APPLIED FLAME SHALL BE 1668 MINUTES.
1670	FLASHPOINT OF IMPREGNANT OR POTTING COMPOUND. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1670.
1672	FLASHPOINT OF IMPREGNANT OR POTTING COMPOUND. THE FLASHPOINT SHALL BE NOT LESS THAN 1672 DEGREES CELSIUS.
1674	FLASHPOINT OF IMPREGNANT OR POTTING COMPOUND. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1674.
1676	FLASHPOINT OF IMPREGNANT OR POTTING COMPOUND. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD92.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4798
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	4799
NO DEGRADATION OF PERFORMANCE.	4815
REMAIN WITHIN SPECIFIED TOLERANCE.	4791
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1477
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	4795
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	4805
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	4813
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	4803
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4788

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4798	HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.
4799	HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OF PHYSICAL DAMAGE.
4815	THERE SHALL BE NO DEGRADATION OF PERFORMANCE.
4791	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1477	THERE SHALL BE NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DIELECTRIC WITHSTANDING VOLTAGE IS PERFORMED.
4795	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4795 MEGOHM(S) AT HIGH HUMIDITY.
4805	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4805 MEGOHM(S) AFTER DRYING.
4813	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4813 MILLIAMPERE(S) AT HIGH HUMIDITY.
4803	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4803 MILLIAMPERE(S) AFTER DRYING.
4788	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 103.	4853
*TEST CONDITION (LETTER)	4890
POLARIZING VOLTAGE (VOLTS, DC)	4793
DURATION OF POLARIZING VOLTAGE APPLICATION (HOURS)	4790
POINTS OF APPLICATION OF POLARIZING VOLTAGE:	
BETWEEN MUTUALLY INSULATED PARTS.	4969
BETWEEN ALL INSULATED PARTS AND GROUND.	4970
BETWEEN CURRENT CARRYING PARTS AND CASE.	4971
BETWEEN CURRENT CARRYING PARTS AND GROUND.	6202
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	6207
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	6206

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4853	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 103 OF MIL-STD-202.
4890	TEST CONDITION LETTER 4890 SHALL APPLY.
4793	MAGNITUDE OF THE POLARIZING VOLTAGE SHALL BE 4793 VOLTS, DC.
4790	DURATION OF APPLICATION OF VOLTAGE SHALL BE 4790 HOUR(S).
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
4969	BETWEEN MUTUALLY INSULATED PARTS.
4970	BETWEEN ALL INSULATED PARTS AND GROUND.
4971	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
6202	BETWEEN CURRENT CARRYING PARTS AND GROUND.
6207	DIELECTRIC WITHSTANDING VOLTAGE TEST SHALL BE PERFORMED AT HIGH HUMIDITY.
6206	DIELECTRIC WITHSTANDING VOLTAGE TEST SHALL BE PERFORMED AFTER DRYING.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMMERSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4819
NO EVIDENCE OF PHYSICAL DAMAGE.	4820
REMAIN WITHIN SPECIFIED TOLERANCE.	4822
MINIMUM INSULATION RESISTANCE (MEGOHMS)	4825
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENTS EXCEPT ____	4809
PER MIL-STD-202, METHOD 104.	4810
*TEST CONDITION (LETTER)	4811
MEASUREMENTS AFTER FINAL CYCLE (HOURS)	4812
TIME BEFORE MEASUREMENTS AFTER FINAL CYCLE (HOURS)	4814
IMPEDANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1678
PER ELECTRICAL CHARACTERISTICS TABLE.	1680

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4819	IMMERSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4819.
4820	IMMERSION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4822	ITEM(S) SHALL REMAIN WITH SPECIFIED TOLERANCE.
4825	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 4825 MEGOHM(S).
4809	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4809.
4810	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 104 OF MIL-STD-202.
4811	TEST CONDITION LETTER 4811 SHALL APPLY.
4812	FINAL MEASUREMENT(S) SHALL BE MADE WITHIN 4812 HOUR(S) AFTER FINAL CYCLE.
4814	MEASUREMENTS SHALL BE NOT MADE UNTIL 4814 HOUR(S) AFTER THE FINAL CYCLE.
1678	IMPEDANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1678.
1680	IMPEDANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE ELECTRICAL CHARACTERISTICS TABLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMPEDANCE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1682
PER MIL-F-18327.	1684
INSERTION LOSS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1686
PER ELECTRICAL CHARACTERISTICS TABLE.	1688

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1682	IMPEDANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1682.
1684	IMPEDANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-18327.
1686	INSERTION LOSS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1686.
1688	INSERTION LOSS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE ELECTRICAL CHARACTERISTICS TABLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSERTION LOSS (CONT)	
REQUIREMENTS (CONT)	
PER INSERTION LOSS TABLE.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

INSERTION LOSS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE INSERTION LOSS TABLE.

INSERTION LOSS TABLE

FREQUENCY		INSERTION LOSS (DECIBELS)							
UNIT	VALUE	1	2	3	4	5	6	7	8
KILOHERTZ	2800	2801	2802	2803	2804	2805	2806	2807	2808
KILOHERTZ	2809	2810	2811	2812	2813	2814	2815	2816	2817
KILOHERTZ	2818	2819	2820	2821	2822	2823	2824	2825	2826
KILOHERTZ	2827	2828	2829	2830	2831	2832	2833	2834	2835
KILOHERTZ	2836	2837	2838	2839	2840	2841	2842	2843	2844
KILOHERTZ	2845	2846	2847	2848	2849	2850	2851	2852	2853
KILOHERTZ	2854	2855	2856	2857	2858	2859	2860	2861	2862
MEGAHERTZ	2863	2864	2865	2866	2867	2868	2869	2870	2871
MEGAHERTZ	2872	2873	2874	2875	2876	2877	2878	2879	2880
MEGAHERTZ	2881	2882	2883	2884	2885	2886	2887	2888	2889
MEGAHERTZ	2890	2891	2892	2893	2894	2895	2896	2897	2898
MEGAHERTZ	2899	2900	2901	2902	2903	2904	2905	2906	2907
MEGAHERTZ	2908	2909	2910	2911	2912	2913	2914	2915	2916
MEGAHERTZ	2917	2918	2919	2920	2921	2922	2923	2924	2925
GIGAHERTZ	2926	2927	2928	2929	2930	2931	2932	2933	2934
GIGAHERTZ	2935	2936	2937	2938	2939	2940	2941	2942	2943
GIGAHERTZ	2944	2945	2946	2947	2948	2949	2950	2951	2952
GIGAHERTZ	2953	2954	2955	2956	2957	2958	2959	2960	2961
GIGAHERTZ	2962	2963	2964	2965	2966	2967	2968	2969	2970
GIGAHERTZ	2971	2972	2973	2974	2975	2976	2977	2978	2979
GIGAHERTZ	2980	2981	2982	2983	2984	2985	2986	2987	2988

NOTE A: 2989.

NOTE B: 2990.

NOTE C: 2991.

NOTE D: 2992.

NOTE E: 2993.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSERTION LOSS (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1692
PER DOCUMENT (DOC DES) ____	1694
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1380
AS FOLLOWS:	6359
*MINIMUM INSULATION RESISTANCE (SELECT ONE)	
SINGLE TEST	
(MEGOHMS)	1386
MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	1384
*SECOND TEST (MEGOHMS)	1387
REMAIN WITHIN SPECIFIED TOLERANCE.	1388
NO EVIDENCE OF PHYSICAL DAMAGE.	1407

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1692	INSERTION LOSS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1692.
1694	INSERTION LOSS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1694.
1380	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.
6359	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1386	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 1386 MEGOHM(S).
1384	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1384 MEGOHM(S) AT THE FIRST TEST TEMPERATURE.
1387	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1387 MEGOHM(S) AT THE SECOND TEST TEMPERATURE.
1388	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1407	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1371
PER MIL-STD-202, METHOD 302.	1511
*CONDITION (SELECT ONE)	
TEST CONDITION (LETTER)	1378
TEST VOLTAGE (VOLTS, DC)	1373
ELECTRIFICATION TIME (SECONDS)	1376
MAXIMUM MEASUREMENT ERROR AT REQUIRED VALUE (PERCENT)	1377
POINTS OF APPLICATION OF TEST VOLTAGE:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	1497
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	1498
BETWEEN MUTUALLY INSULATED PARTS.	1522
BETWEEN INSULATED PARTS AND GROUND.	1523
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	1524

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1371	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.
1511	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 302 OF MIL-STD-202.
1378	TEST CONDITION LETTER 1378 SHALL APPLY.
1373	TEST POTENTIAL SHALL BE 1373 VOLTS, DC.
1376	ELECTRIFICATION DURATION SHALL BE 1376 SECOND(S).
1377	THE MEASUREMENT ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1377 PERCENT.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
1497	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
1498	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
1522	BETWEEN MUTUALLY INSULATED PARTS.
1523	BETWEEN ALL INSULATED PARTS AND GROUND.
1524	BETWEEN CURRENT CARRYING PARTS AND THE CASE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 302. (CONT)	
SPECIAL PREPARATIONS OR CONDITIONS PER DOCUMENT (DOC DES)	1520
FIRST TEST TEMPERATURE (DEGREES CELSIUS)	1372
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	1381
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1383
MOISTURE RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1400
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	1396
REMAIN WITHIN SPECIFIED TOLERANCE.	1398
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1394
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	1429
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	1404

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1520	SPECIAL PREPARATIONS OR CONDITIONS SHALL BE IN ACCORDANCE WITH 1520.
1372	FIRST TEST TEMPERATURE SHALL BE 1372 DEGREES CELSIUS.
1381	SECOND TEST TEMPERATURE SHALL BE 1381 DEGREES CELSIUS.
1383	TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1383 DEGREES CELSIUS.
1400	MOISTURE RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1400.
1396	MOISTURE RESISTANCE. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
1398	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1394	THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING OR INSULATION BREAKDOWN, WHEN DIELECTRIC WITHSTANDING VOLTAGE IS APPLIED.
1429	CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1429 MILLIAMPERE(S) AT HIGH HUMIDITY.
1404	CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1404 MILLIAMPERE(S) AFTER DRYING.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE (CONT)	
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE. (CONT)	
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	1432
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	1406
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1391
PER MIL-STD-202, METHOD 106.	1397
POLARIZING VOLTAGE (VOLTS, DC)	1395
LOADING VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4981
(VOLTS, AC)	4980
PERCENT OF SAMPLE SUBJECTED TO POLARIZING VOLTAGE (PERCENT)	4991
STEP 7A NOT APPLICABLE.	4985
STEP 7B NOT APPLICABLE.	4986
MOUNT PER DOCUMENT (DOC DES)	1449
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	4983

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1432	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1432 MEGOHM(S) AT HIGH HUMIDITY.
1406	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1406 MEGOHM(S) AFTER DRYING.
1391	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1391.
1397	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 106 OF MIL-STD-202.
1395	POLARIZING VOLTAGE SHALL BE 1395 VOLTS, DC.
4981	LOADING VOLTAGE SHALL BE 4981 VOLTS, DC.
4980	LOADING VOLTAGE SHALL BE 4980 VOLTS, AC.
4991	4991 PERCENT OF THE SAMPLE SHALL BE SUBJECTED TO THE POLARIZING VOLTAGE.
4985	STEP 7A OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
4986	STEP 7B OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
1449	MOUNTING SHALL BE IN ACCORDANCE WITH 1449.
4983	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 106. (CONT)	
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	4984
OVERLOAD	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1700
AS FOLLOWS:	1702
NO EVIDENCE OF PHYSICAL DAMAGE.	1704
REMAIN WITHIN THE FOLLOWING SPECIFIED TOLERANCES:	
INSULATION RESISTANCE.	1708
VOLTAGE DROP.	1710
OTHER ____	1712
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1714
PER MIL-F-15733.	1716
TEST TEMPERATURE (DEGREES CELSIUS)	1718

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4984	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.
1700	OVERLOAD. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1700.
1702	OVERLOAD. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1704	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
	THE ITEM(S) SHALL REMAIN WITHIN THE FOLLOWING SPECIFIED TOLERANCE(S):
1708	INSULATION RESISTANCE.
1710	VOLTAGE DROP.
1712	1712.
1714	OVERLOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1714.
1716	OVERLOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-15733.
1718	THE TEST TEMPERATURE SHALL BE 1718 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OVERLOAD (CONT)	
PER MIL-F-15733. (CONT)	
TEST CURRENT (SELECT ONE)	
(AMPERES)	1720
(PERCENT OF RATED CURRENT)	1722
TEST FREQUENCY (SELECT ONE)	
(HERTZ)	1724
(KILOHERTZ)	1726
(MEGAHERTZ)	1728
(GIGAHERTZ)	1730
MAXIMUM RATED (PERCENT)	1732
OVERLOAD DURATION (SELECT ONE)	
(SECONDS)	1734
(MINUTES)	1736
RELIABILITY SCREENING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	6929

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1720	THE TEST CURRENT SHALL BE 1720 AMPERES.
1722	THE TEST CURRENT SHALL BE 1722 PERCENT OF RATED CURRENT.
1724	THE TEST FREQUENCY SHALL BE 1724 HERTZ.
1726	THE TEST FREQUENCY SHALL BE 1726 KILOHERTZ.
1728	THE TEST FREQUENCY SHALL BE 1728 MEGAHERTZ.
1730	THE TEST FREQUENCY SHALL BE 1730 GIGAHERTZ.
1732	THE TEST FREQUENCY SHALL BE 1732 PERCENT OF THE RATED FREQUENCY.
1734	THE OVERLOAD DURATION SHALL BE 1734 SECONDS.
1736	THE OVERLOAD DURATION SHALL BE 1736 MINUTES.
6929	RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6929.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RELIABILITY SCREENING (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE.	6930
REMAIN WITHIN SPECIFIED TOLERANCE.	6937
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6696
PER MIL-STD-202, METHOD 108.	6697
*DURATION (SELECT ONE)	
TEST CONDITION (LETTER)	6698
(HOURS)	6699
*DUTY CYCLE (SELECT ONE)	
1.5 HOURS ON AND 0.5 HOUR OFF.	6710
STEADY STATE.	6713
*TEST TEMPERATURE (DEGREES CELSIUS)	6700
*TOLERANCE (DEGREES CELSIUS)	6701
STILL AIR REQUIRED.	6923

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6930	RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6937	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
6696	RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASIC DOCUMENT, EXCEPT 6696.
6697	RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 108 OF MIL-STD-202.
6698	TEST CONDITION LETTER 6698 SHALL APPLY.
6699	DURATION OF THE TEST SHALL BE 6699 HOUR(S).
6710	DUTY CYCLE SHALL BE ONE AND ONE-HALF HOURS ON AND ONE-HALF HOUR OFF.
6713	DUTY CYCLE SHALL BE STEADY STATE.
6700	TEST TEMPERATURE SHALL BE 6700 DEGREES CELSIUS.
6701	TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 6701 DEGREES CELSIUS.
6923	TEST CHAMBER SHALL HAVE STILL AIR.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RELIABILITY SCREENING (CONT)	
PER MIL-STD-202, METHOD 108. (CONT)	
POWER APPLIED TIMES RATED POWER (NUMBER)	6921
MAXIMUM VOLTAGE (VOLTS)	6939
TEST POTENTIAL (SELECT ONE)	
(VOLTS, AC)	6706
(VOLTS, DC)	6707
ELECTRICAL LOAD (OHMS)	6920
MEASUREMENT INTERVALS (HOURS)	6922
MOUNT PER DOCUMENT (DOC DES)	6924
RESISTANCE TO SOLDERING HEAT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4700
NO EVIDENCE OF PHYSICAL DAMAGE.	4701
REMAIN WITHIN SPECIFIED TOLERANCE.	4718
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4689

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6921	ITEM(S) SHALL BE TESTED AT 6921 TIMES THE RATED POWER.
6939	APPLIED VOLTAGE SHALL BE NOT GREATER THAN 6939 VOLTS.
6706	TEST POTENTIAL SHALL BE 6706 VOLTS, AC.
6707	TEST POTENTIAL SHALL BE 6707 VOLTS, DC.
6920	THE ELECTRICAL LOAD SHALL BE 6920 OHMS.
6922	MEASUREMENTS SHALL BE TAKEN AT 6922 HOUR INTERVALS DURING THE TEST.
6924	MOUNTING SHALL BE IN ACCORDANCE WITH 6924.
4700	RESISTANCE TO SOLDERING HEAT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4700.
4701	RESISTANCE TO SOLDERING HEAT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4718	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4689	RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANDE WITH THE BASE DOCUMENT, EXCEPT 4689.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO SOLDERING HEAT (CONT.)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 210.	4698
*TEST CONDITION (LETTER)	4691
NUMBER OF TERMINATIONS TESTED (QUANTITY)	4694
DEPTH OF IMMERSION IN SOLDER (SELECT ONE)	
(INCHES)	4692
(MILLIMETERS)	4669
IMMERSION IN FLUX PERMITTED.	4671
SPECIAL PREPARATIONS PERMITTED.	4989
COOLING TIME (MINUTES)	4695
RESISTANCE TO SOLVENTS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4834
NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.	4830
MARKING SHALL REMAIN LEGIBLE.	4836

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4698	RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 210 OF MIL-STD-202.
4691	TEST CONDITION LETTER 4691 SHALL APPLY.
4694	4694 TERMINATION(S) PER UNIT SHALL BE TESTED.
4692	DEPTH OF IMMERSION IN SOLDER SHALL BE 4692 INCH(S).
4669	DEPTH OF IMMERSION IN SOLDER SHALL BE 4669 MILLIMETER(S).
4671	IMMERSION OF TERMINATION IN FLUX SHALL BE PERMITTED.
4989	SPECIAL PREPARATION SHALL BE PERMITTED.
4695	COOLING TIME SHALL BE 4695 MINUTES PRIOR TO FINAL EXAMINATION AND MEASUREMENTS.
4834	RESISTANCE TO SOLVENTS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4834.
4830	RESISTANCE TO SOLVENTS. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
4836	MARKING SHALL REMAIN LEGIBLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO SOLVENTS (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4829
PER MIL-STD-202, METHOD 215.	4839
SOLVENT(S) TO BE ADDED (NAME)	4838
SOLVENT(S) TO BE DELETED (SUBPARAGRAPH LETTER)	4835
BRUSHED AREA (SELECT ONE)	
BRUSH MARKING AREA.	4831
ALL OF SPECIMEN TO BE BRUSHED.	6279
SALT SPRAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4878
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE.	4782

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4829	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4829.
4839	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 215 OF MIL-STD-202. THE SPECIMENS SHALL BE DIVIDED INTO GROUPS OF EQUAL NUMBER TO THE EXTENT POSSIBLE.
4838	IN ADDITION TO THE SPECIFIED SOLVENT(S), 4838 SHALL ALSO BE USED.
4835	BRUSHING SHALL BE PERFORMED WITH THE SOLVENTS IN ACCORDANCE WITH METHOD 215 OF MIL-STD-202, EXCEPT THAT SOLUTION(S) 4835 SHALL NOT BE USED.
4831	THE MARKING AREA SHALL BE BRUSHED.
6279	THE ENTIRE SURFACE SHALL BE BRUSHED.
4878	SALT SPRAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4878.
4782	SALT SPRAY. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT SPRAY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4770
PER MIL-STD-202, METHOD 101.	4771
*TEST CONDITION (LETTER)	4772
MOUNTING (SELECT ONE)	
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4773
MOUNTING SHALL BE BY NORMAL METHOD.	4765
MOUNTING SHALL BE BY ANY SUITABLE METHOD.	4766
SEAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4745
AS FOLLOWS:	6370
SPECIFIED TEST METHOD SENSITIVITY.	4746
NO BUBBLES INDICATIVE OF LEAKAGE.	4748
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4734

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4770	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4770.
4771	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 101 OF MIL-STD-202.
4772	TEST CONDITION LETTER 4772 SHALL APPLY.
4773	MOUNTING SHALL BE IN ACCORDANCE WITH 4773.
4765	MOUNTING SHALL BE BY THE NORMAL METHOD.
4766	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4745	SEAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4745.
6370	SEAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
4746	THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE SPECIFIED TEST METHOD SENSITIVITY.
4748	THERE SHALL BE NO BUBBLES INDICATIVE OF LEAKAGE.
4734	SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4734.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 112.	4732
*TEST CONDITION LETTER	
LETTER A.	4737
LIQUID FOR BATH (NAME)	4738
MINIMUM BATH (TEMPERATURE (DEGREES CELSIUS)	4739
LETTER B.	6320
LIQUID FOR BATH (NAME)	6321
MINIMUM BATH TEMPERATURE (DEGREES CELSIUS)	6322
LETTER C.	6323
*LEAK RATE SENSITIVITY (ATM CC/SEC)	4741
*TEST PROCEDURE (SELECT ONE)	
TEST PROCEDURE I.	4740
VACUUM PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	4742
(KILOPASCALS)	4736

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4732	SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 112 OF MIL-STD-202.
4737	TEST CONDITION LETTER A SHALL APPLY.
4738	LIQUID FOR BUBBLE BATH SHALL BE 4738.
4739	TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 4739 DEGREES CELSIUS.
6320	TEST CONDITION LETTER B SHALL APPLY.
6321	LIQUID FOR BUBBLE TEST BATH SHALL BE 6321.
6322	TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 6322 DEGREES CELSIUS.
6323	TEST CONDITION LETTER C SHALL APPLY.
4741	LEAK SENSITIVITY RATE SHALL BE 4741 ATM CC/SEC.
4740	PROCEDURE NUMBER I SHALL APPLY.
4742	VACUUM PRESSURE SHALL BE 4742 POUNDS PER SQUARE INCH.
4736	VACUUM PRESSURE SHALL BE 4736 KILOPASCALS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
TEST PROCEDURE (CONT)	
TEST PROCEDURE II.	6324
BACKFILL PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	6325
(KILOPASCALS)	6326
NUMBER OF PRESSURE CYCLES (QUANTITY)	4749
TEST PROCEDURE III.	6328
GROSS LEAK TEST CONDITION (LETTER)	4750
TEST PROCEDURE IV.	6329
CHAMBER PRESSURE (SELECT ONE)	
(TORR)	4751
(KILOPASCALS)	4735
DURATION OF REDUCED PRESSURE (MINUTES)	4752
GROSS LEAK TEST CONDITION (LETTER)	6330
LETTER D.	6331
ANY SUITABLE MOUNTING FIXTURE.	4743

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6324	PROCEDURE NUMBER II SHALL APPLY.
6325	BACKFILL PRESSURE SHALL BE 6325 POUNDS PER SQUARE INCH.
6326	BACKFILL PRESSURE SHALL BE 6326 KILOPASCALS.
4749	THERE SHALL BE 4749 PRESSURE CYCLE(S).
6328	PROCEDURE NUMBER III SHALL APPLY.
4750	GROSS LEAK TEST CONDITION LETTER 4750 SHALL APPLY.
6329	PROCEDURE NUMBER IV SHALL APPLY.
4751	CHAMBER PRESSURE SHALL BE 4751 TORR.
4735	CHAMBER PRESSURE SHALL BE 4735 KILOPASCALS.
4752	DURATION AT LOW PRESSURE SHALL BE 4752 MINUTE(S).
6330	GROSS LEAK TEST CONDITION LETTER 6330 SHALL APPLY.
6331	TEST CONDITION LETTER D SHALL APPLY.
4743	MOUNTING SHALL BE BY ANY SUITABLE METHOD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
TEST CONDITION LETTER (CONT)	
LETTER E.	6332
ANY SUITABLE MOUNTING FIXTURE.	6333
SHOCK, HIGH IMPACT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1494
NO EVIDENCE OF PHYSICAL DAMAGE.	1495
REMAIN WITHIN SPECIFIED TOLERANCE.	1464
NO DISCONTINUITY DURING TEST.	1451
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1486
PER MIL-STD-202, METHOD 207.	1482
*MOUNTING FIXTURE (SELECT ONE)	
FIGURE NUMBER FROM METHOD 207 OF MIL-STD-202 (NUMBER)	1488
ANY SUITABLE MOUNTING FIXTURE.	1478

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6332	TEST CONDITION LETTER E SHALL APPLY.
6333	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
1494	SHOCK, HIGH IMPACT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1494.
1495	SHOCK, HIGH IMPACT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1464	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1451	THERE SHALL BE NO DISCONTINUITY DURING THE TEST.
1486	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1486.
1482	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 207 OF MIL-STD-202.
1488	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH FIGURE 1488 OF METHOD 207 OF MIL-STD-202.
1478	THE MOUNTING FIXTURE SHALL BE ANY SUITABLE MOUNTING FIXTURE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, HIGH IMPACT (CONT)	
MOUNTING FIXTURE (CONT)	
MOUNTING FIXTURE PER DOCUMENT (DOC DES)	1468
PERCENT RATED LOAD APPLIED (PERCENT)	6203
SHOCK, SPECIFIED PULSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1508
NO EVIDENCE OF PHYSICAL DAMAGE.	1509
NO DISCONTINUITY DURING TEST.	1471
REMAIN WITHIN SPECIFIED TOLERANCE.	4703
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1502
PER MIL-STD-202, METHOD 213.	1500
*TEST CONDITION (LETTER)	1504
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	4686
NORMAL MOUNTING METHOD.	4685
MOUNT PER DOCUMENT (DOC DES)	4684

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1468	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH 1468.
6203	THE ELECTRICAL LOAD SHALL BE 6203 PERCENT OF THE RATED LOAD.
1508	SHOCK, SPECIFIED PULSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1508.
1509	SHOCK, SPECIFIED PULSE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1471	THERE SHALL BE NO DISCONTINUITY DURING THE TEST.
4703	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1502	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1502.
1500	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 213 OF MIL-STD-202.
1504	TEST CONDITION LETTER 1504 SHALL APPLY.
4686	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4685	MOUNTING SHALL BE BY THE NORMAL METHOD.
4684	MOUNTING SHALL BE IN ACCORDANCE WITH 4684.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, SPECIFIED PULSE (CONT)	
PER MIL-STD-202, METHOD 213. (CONT)	
PERCENT RATED LOAD APPLIED (PERCENT)	6204
SOLDERABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4674
NO EVIDENCE OF PHYSICAL DAMAGE.	4675
MEET EVALUATION CRITERIA SPECIFIED IN METHOD 208 OF MIL-STD-202.	4672
REMAIN WITHIN SPECIFIED TOLERANCE.	4677
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4662
PER MIL-STD-202, METHOD 208.	4683
NUMBER OF TERMINALS TO BE TESTED (QUANTITY)	4666
DEPTH OF IMMERSION (SELECT ONE)	
(INCHES)	4667
(MILLIMETERS)	4663

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6204	THE ELECTRICAL LOAD SHALL BE 6204 PERCENT OF THE RATED LOAD.
4674	SOLDERABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4674.
4675	SOLDERABILITY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4672	THE RESULTS OF THE SOLDERABILITY TEST SHALL BE IN ACCORDANCE WITH THE ACCEPTANCE CRITERIA OF METHOD 208 OF MIL-STD-202.
4677	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4662	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4662.
4683	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 208 OF MIL-STD-202.
4666	4666 TERMINATION(S) PER UNIT SHALL BE TESTED.
4667	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4667 INCH(S).
4663	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4663 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SOLDERABILITY (CONT)	
PER MIL-STD-202, METHOD 208. (CONT)	
DISTANCE WRAP WIRE APPLIED FROM BODY (SELECT ONE)	
(INCHES)	4664
(MILLIMETERS)	4665
SPECIAL PREPARATIONS PERMITTED.	6205
STABILITY AT TEMPERATURE EXTREMES	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1740
AS FOLLOWS:	1742
REMAIN WITHIN SPECIFIED DIELECTRIC WITHSTANDING VOLTAGE REQUIREMENTS.	1744
REMAIN WITHIN TOLERANCES SPECIFIED IN ELECTRICAL CHARACTERISTICS TABLE.	1746
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1748
PER MIL-F-18327.	1750

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4664	THE WRAP WIRE SHALL BE 4664 INCH(S) FROM THE BODY.
4665	THE WRAP WIRE SHALL BE 4665 MILLIMETER(S) FROM THE BODY.
6205	SPECIAL PREPARATION SHALL BE PERMITTED.
1740	STABILITY AT TEMPERATURE EXTREMES. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT, 1740.
1742	STABILITY AT TEMPERATURE EXTREMES. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1744	THE ITEM(S) SHALL REMAIN WITHIN THE SPECIFIED DIELECTRIC WITHSTANDING VOLTAGE REQUIREMENTS.
1746	THE ITEM(S) SHALL REMAIN WITHIN THE TOLERANCE(S) SPECIFIED IN THE ELECTRICAL CHARACTERISTICS TABLE.
1748	STABILITY AT TEMPERATURE EXTREMES. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1748.
1750	STABILITY AT TEMPERATURE EXTREMES. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-18327.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STABILITY AT TEMPERATURE EXTREMES (CONT)	
PER MIL-F-18327. (CONT)	
MINIMUM EXPOSURE DURATION	
(MINUTES)	1752
(HOURS)	1754
MINIMUM TEST TEMPERATURE (DEGREES CELSIUS)	1756
MAXIMUM TEST TEMPERATURE (DEGREES CELSIUS)	1758
TEMPERATURE RISE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1760
AS FOLLOWS:	1762
MAXIMUM TEMPERATURE RISE (DEGREES CELSIUS)	1764
NOMINAL TEMPERATURE RISE (DEGREES CELSIUS)	1766
NO EVIDENCE OF PHYSICAL DAMAGE.	1768
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1770

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1752 THE EXPOSURE DURATION SHALL BE NOT LESS THAN 1752 MINUTE(S).

1754 THE EXPOSURE DURATION SHALL BE NOT LESS THAN 1754 HOUR(S).

1756 THE MINIMUM TEST TEMPERATURE SHALL BE 1756 DEGREES CELSIUS.

1758 THE MAXIMUM TEST TEMPERATURE SHALL BE 1758 DEGREES CELSIUS.

1760 TEMPERATURE RISE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1760.

1762 TEMPERATURE RISE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

1764 THE TEMPERATURE RISE SHALL BE NOT GREATER THAN 1764 DEGREES CELSIUS.

1766 THE TEMPERATURE RISE SHALL BE 1766 DEGREES CELSIUS.

1768 THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

1770 TEMPERATURE RISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1770.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE RISE (CONT)	
TEST METHODS (CONT)	
PER DOCUMENT (DOC DES)	1772
TEST VOLTAGE (VOLTS)	1774
TEST CURRENT (AMPERES)	1776
TEST FREQUENCY (SELECT ONE)	
(HERTZ)	1778
(KILOHERTZ)	1780
(MEGAHERTZ)	1782
(GIGAHERTZ)	1784
TERMINAL STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1418
NO EVIDENCE OF PHYSICAL DAMAGE.	1433
REMAIN WITHIN SPECIFIED TOLERANCE.	6296
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1410

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1772	TEMPERATURE RISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1772.
1774	THE TEST VOLTAGE SHALL BE 1774 VOLT(S).
1776	THE TEST CURRENT SHALL BE 1776 AMPERE(S).
1778	THE TEST FREQUENCY SHALL BE 1778 HERTZ.
1780	THE TEST FREQUENCY SHALL BE 1780 KILOHERTZ.
1782	THE TEST FREQUENCY SHALL BE 1782 MEGAHERTZ.
1784	THE TEST FREQUENCY SHALL BE 1784 GIGAHERTZ.
1418	TERMINAL STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1418.
1433	TERMINAL STRENGTH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6296	ITEM(S) SHALL REMAIN WITHIN SPECIIFED TOLERANCE.
1410	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1410.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINAL STRENGTH (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 211.	1375
*TEST CONDITIONS	
TEST CONDITION A, APPLIED FORCE (SELECT ONE)	
(POUNDS)	1411
(NEWTONS)	1419
TEST CONDITION B, BENDS (NUMBER)	1412
TEST CONDITION C, LOAD (SELECT ONE)	
(POUNDS)	1413
(KILOGRAMS)	1420
TEST CONDITION D.	1414
TEST CONDITION E, TORQUE (SELECT ONE)	
(POUND-INCHES)	1416
(NEWTON METERS)	1421

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1375	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 211 OF MIL-STD-202.
1411	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1411 POUND(S).
1419	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1419 NEWTON(S).
1412	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION B. THERE SHALL BE 1412 BEND(S).
1413	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1413 POUND(S).
1420	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1420 KILOGRAM(S).
1414	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION D.
1416	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1416 POUND-INCH(S).
1421	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1421 NEWTON METER(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currentversion before use.

KEWYORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THERMAL SHOCK (TEMPERATURE CYCLING)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4722
NO EVIDENCE OF PHYSICAL DAMAGE.	4723
REMAIN WITHIN SPECIFIED TOLERANCE.	4726
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4713
PER MIL-STD-202, METHOD 107.	4714
*TEST CONDITION (LETTER)	4715
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4719
VIBRATION, HIGH FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1455
NO EVIDENCE OF PHYSICAL DAMAGE.	1456
NO DISCONTINUITY DURING TEST.	1473
REMAIN WITH SPECIFIED TOLERANCE.	1469
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1446

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4722	THERMAL SHOCK (TEMPERATURE CYCLING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4722.
4723	THERMAL SHOCK (TEMPERATURE CYCLING). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4726	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4713	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4713.
4714	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 107 OF MIL-STD-202.
4715	TEST CONDITION LETTER 4715 SHALL APPLY.
4719	MOUNTING SHALL BE IN ACCORDANCE WITH 4719.
1455	VIBRATION, HIGH FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1455.
1456	VIBRATION, HIGH FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1473	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1469	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1446	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1446.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, HIGH FREQUENCY (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 204.	1447
*TEST CONDITION (LETTER).	1448
PERCENT RATED LOAD APPLIED (PERCENT)	6200
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4709
NORMAL MOUNTING METHOD.	4708
MOUNT PER DOCUMENT (DOC DES)	4707
METHOD OF DETERMINING MECHANICAL RESONANCE (SELECT ONE)	
VISUALLY BY MEANS OF A STROBOTAC.	1533
ELECTRICAL OUTPUT INDICATORS.	1534
VIBRATION, LOW FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1475
NO EVIDENCE OF PHYSICAL DAMAGE.	1476

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1447	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 204 OF MIL-STD-202.
1448	TEST CONDITION LETTER 1448 SHALL APPLY.
6200	THE LOAD SHALL BE 6200 PERCENT OF THE RATED LOAD.
4709	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4708	MOUNTING SHALL BE BY THE NORMAL METHOD.
4707	MOUNTING SHALL BE IN ACCORDANCE WITH 4707.
1533	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE VISUALLY BY MEANS OF A STROBOTAC.
1534	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE BY ELECTRICAL OUTPUT INDICATORS.
1475	VIBRATION, LOW FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1475.
1476	VIBRATION, LOW FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
REMAIN WITHIN SPECIFIED TOLERANCE.	1480
NO DISCONTINUITY DURING TEST.	1490
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1466
PER MIL-STD-202, METHOD 201.	1467
DURATION OF VIBRATION PER AXIS (HOURS)	1470
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4731
NORMAL MOUNTING METHOD.	4730
MOUNT PER DOCUMENT (DOC DES)	4729
DIRECTION OF MOTION	
PARALLEL TO LONGITUDINAL AXIS.	1535
PERPENDICULAR TO LONGITUDINAL AXIS.	1536
ON THE CENTERLINE OF MOST SENSITIVE AXIS.	4979
90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.	4978

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1480	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1490	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1466	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1466.
1467	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 201 OF MIL-STD-202.
1470	DURATION OF TEST SHALL BE 1470 HOUR(S) PER AXIS.
4731	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4730	MOUNTING SHALL BE BY THE NORMAL METHOD.
4729	MOUNTING SHALL BE IN ACCORDANCE WITH 4729.
1535	THE DIRECTION OF MOTION SHALL BE PARALLEL TO THE LONGITUDINAL AXIS.
1536	THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE LONGITUDINAL AXIS.
4979	THE DIRECTION OF MOTION SHALL BE ON THE CENTERLINE OF THE MOST SENSITIVE AXIS.
4978	THE DIRECTION OF MOTION SHALL BE 90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY (CONT)	
DIRECTION OF MOTION (CONT)	
THREE MUTUALLY PERPENDICULAR DIRECTIONS.	1537
PERCENT RATED LOAD APPLIED (PERCENT)	6201
VIBRATION, RANDOM	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1435
NO EVIDENCE OF PHYSICAL DAMAGE.	1436
REMAIN WITHIN SPECIFIED TOLERANCE.	1538
NO DISCONTINUITY DURING TEST.	1374
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1426
PER MIL-STD-202, METHOD 214.	1427
*TEST CONDITION (ROMAN NUMERAL AND LETTER)	1428
*DURATION OF APPLICATION (SELECT ONE)	
(MINUTES)	1438
(HOURS)	1431

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1537	THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUALLY PERPENDICULAR DIRECTIONS.
6201	THE LOAD SHALL BE 6201 PERCENT OF THE RATED LOAD.
1435	VIBRATION, RANDOM. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1435.
1436	VIBRATION, RANDOM. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1538	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1374	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1426	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1426.
1427	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 214 OF MIL-STD-202.
1428	TEST CONDITION NUMBER AND LETTER 1428 SHALL APPLY.
1438	THE DURATION OF THE TEST SHALL BE 1438 MINUTE(S).
1431	THE DURATION OF THE TEST SHALL BE 1431 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
PER MIL-STD-202, METHOD 214. (CONT)	
MONITORING INSTRUMENTATION OF EXCITATION (SELECT ONE)	
ANY SUITABLE SYSTEM.	1452
CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.	1453
CALIBRATED OSCILLOSCOPE.	1459
NUMBER OF VIBRATION MONITORING TEST POINTS (QUANTITY)	1430
LOCATION OF MONITORING POINTS (SELECT ONE)	
ANY SUITABLE LOCATION.	1439
AS CLOSE AS PRACTICAL TO TEST SPECIMEN.	1462
PERCENT OF RATED LOAD APPLIED (PERCENT)	4678
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4977
NORMAL MOUNTING METHOD.	4976
MOUNT PER DOCUMENT (DOC DES)	4975

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1452	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE ANY SUITABLE INSTRUMENTATION SYSTEM.
1453	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.
1459	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED OSCILLOSCOPE.
1430	THERE SHALL BE 1430 VIBRATION MONITORING POINT(S).
1439	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE ANY SUITABLE LOCATION.
1462	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE AS CLOSE AS PRACTICAL TO THE TEST SPECIMEN(S).
4678	THE LOAD SHALL BE 4678 PERCENT OF THE RATED LOAD.
4977	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4976	MOUNTING SHALL BE BY THE NORMAL METHOD.
4975	MOUNTING SHALL BE IN ACCORDANCE WITH 4975.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VOLTAGE DROP	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1786
SEE ELECTRICAL CHARACTERISTICS TABLE.	1788
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1790
PER MIL-F-15733.	1792
TEST CURRENT (AMPERES)	1794
LOAD TYPE ____	1796
VOLTAGE STANDING WAVE RATIO (VSWR)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1800
AS FOLLOWS:	1802
MAXIMUM VSWR (RATIO)	1804
VSWR FREQUENCY (SELECT ONE)	
(MEGAHERTZ)	1806
(GIGAHERTZ)	1808

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1786	VOLTAGE DROP. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1786.
1788	VOLTAGE DROP. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE ELECTRICAL CHARACTERISTICS TABLE.
1790	VOLTAGE DROP. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1790.
1792	VOLTAGE DROP. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-15733.
1794	THE TEST CURRENT SHALL BE 1794 AMPERE(S).
1796	THE LOAD TYPE SHALL BE 1796.
1800	VOLTAGE STANDING WAVE RATIO (VSWR). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1800.
1802	VOLTAGE STANDING WAVE RATIO (VSWR). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1804	THE VOLTAGE STANDING WAVE RATIO SHALL BE NOT GREATER THAN 1804.
1806	THE VSWR FREQUENCY SHALL BE 1806 MEGAHERTZ.
1808	THE VSWR FREQUENCY SHALL BE 1808 GIGAHERTZ.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VOLTAGE STANDING WAVE RATIO (VSWR) (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1810
PER MIL-F-25880.	1812
TEST FREQUENCY (SELECT ONE)	
(MEGAHERTZ)	1814
(GIGAHERTZ)	1816
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1810	VOLTAGE STANDING WAVE RATIO (VSWR). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1810.
1812	VOLTAGE STANDING WAVE RATIO (VSWR). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-25880.
1814	THE TEST FREQUENCY SHALL BE 1814 MEGAHERTZ.
1816	THE TEST FREQUENCY SHALL BE 1816 GIGAHERTZ.
	MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PART MARKING (CONT)	
MIL-STD-1285.	7630
MIL-STD-130.	7629
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995
DEFINITION OF HERMETIC SEALING	
NOTE: AUTOMATIC WHEN CODE 1582 IS USED TO REQUIRE HERMETIC SEALING.	
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.
	DEFINITION OF HERMETIC SEALING. FOR THE PURPOSE OF THIS DOCUMENT, A HERMETICALLY-SEALED ITEM IS ONE IN WHICH THE ELEMENT IS CONTAINED WITHIN A SEALED ENCLOSURE OF CERAMIC. GLASS OR METAL, OR A COMBINATION THEREOF, WHERE SEALING IS ACCOMPLISHED BY MATERIAL FUSION, WELDING, BRAZING OR SOLDERING.

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI


(Project EDS-A271)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.


APPENDIX A

ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

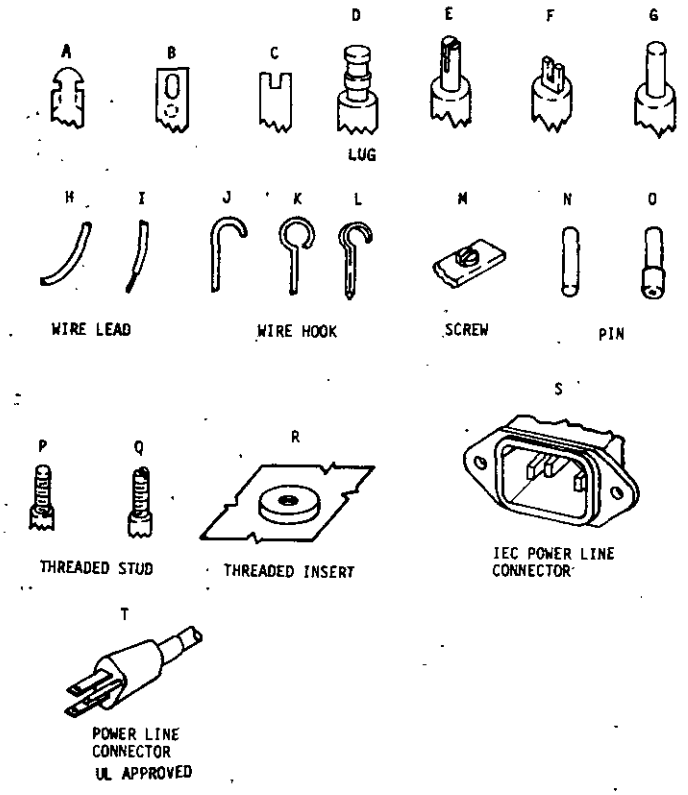


060-01-1

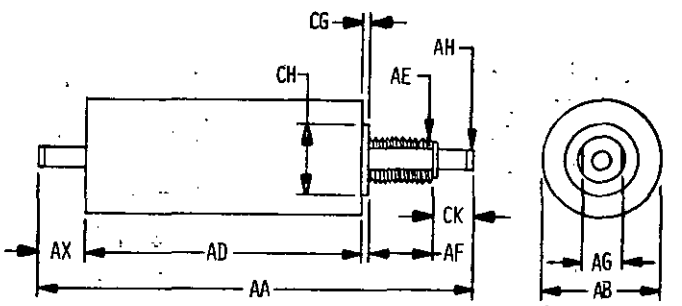


060-02-1


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

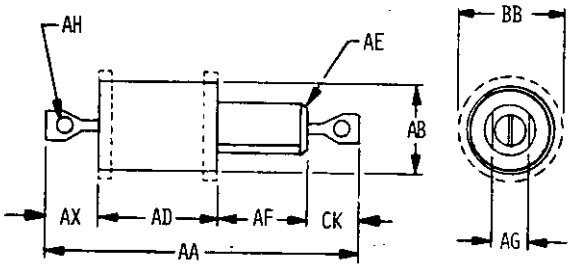


060-02-2

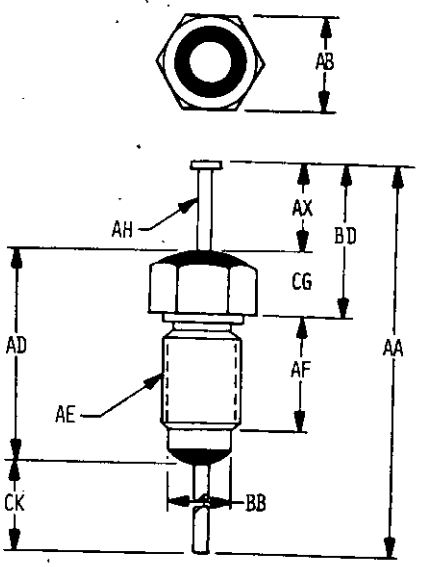


060-02-3






060-02-4

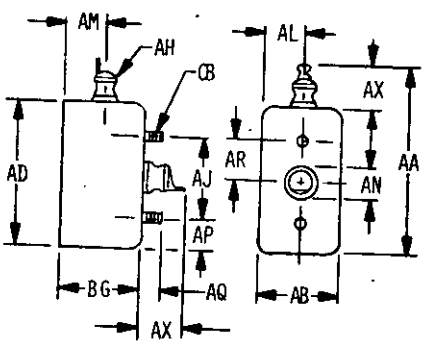


060-02-5


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

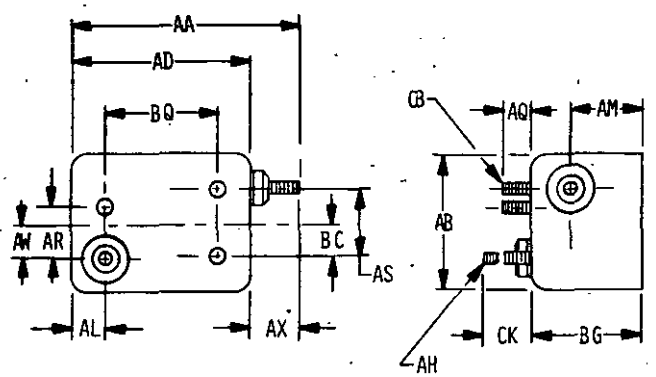

060-02-6

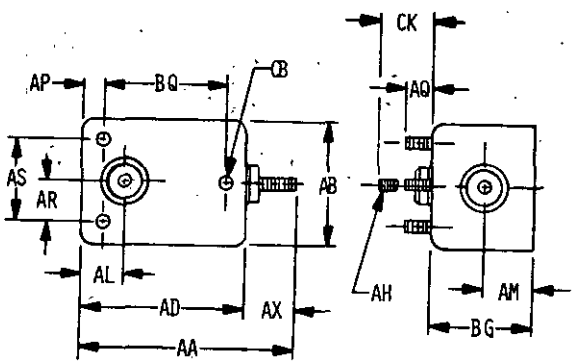


060-02-7

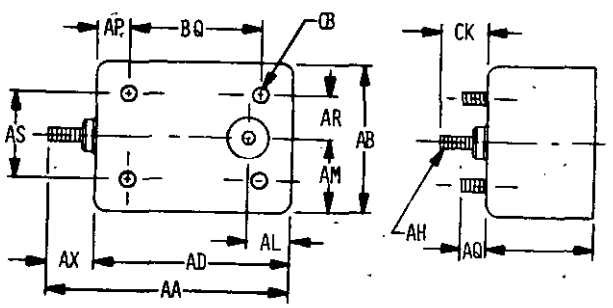


060-02-8


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

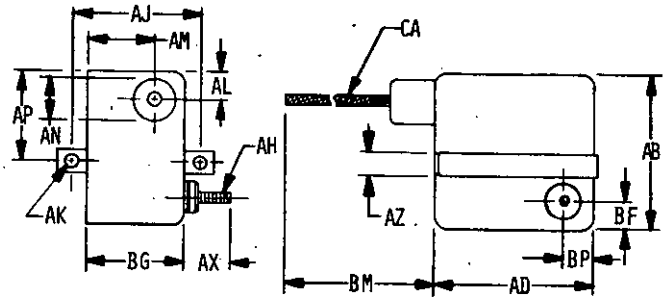

060-02-9

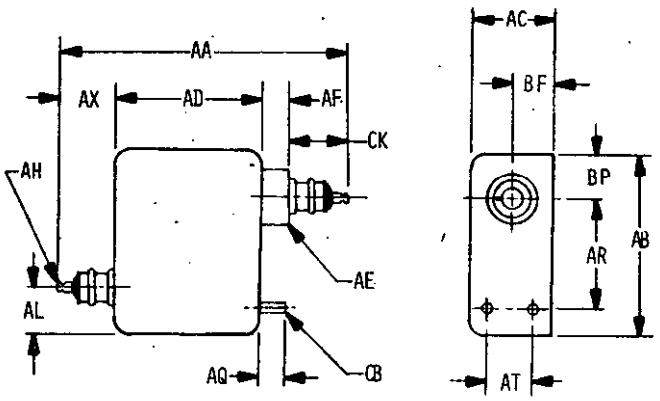


060-02-10

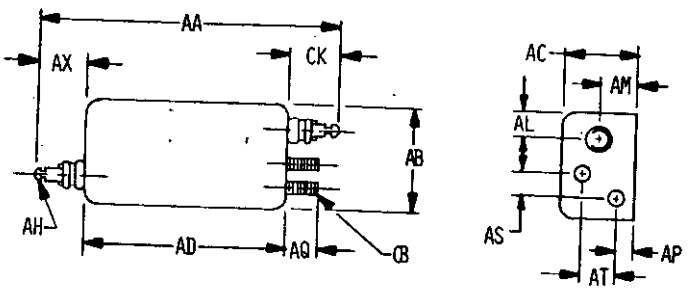


060-02-11


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

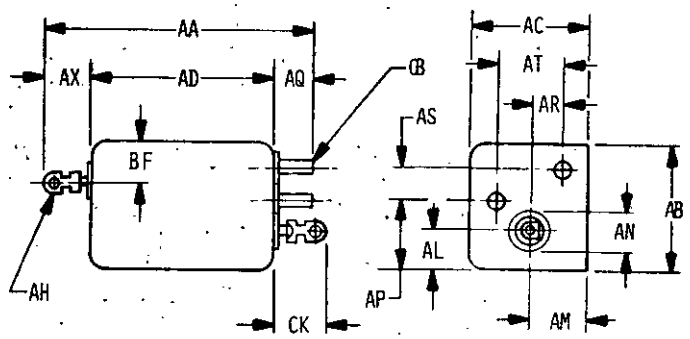

060-02-12

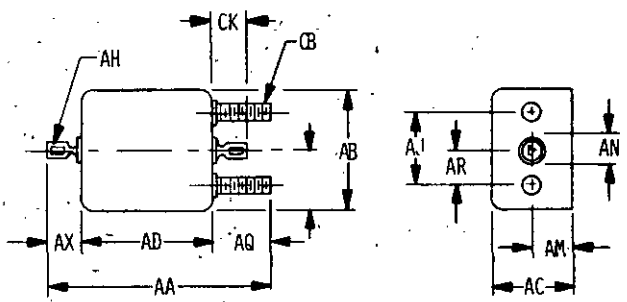


060-02-13

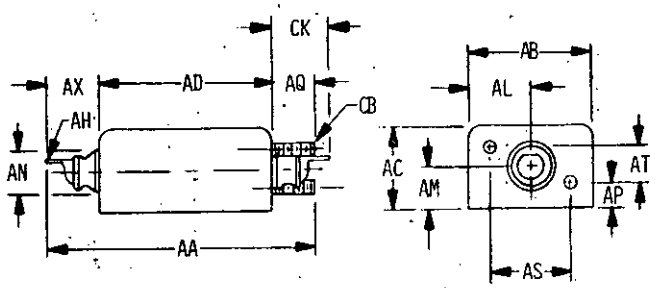


060-02-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

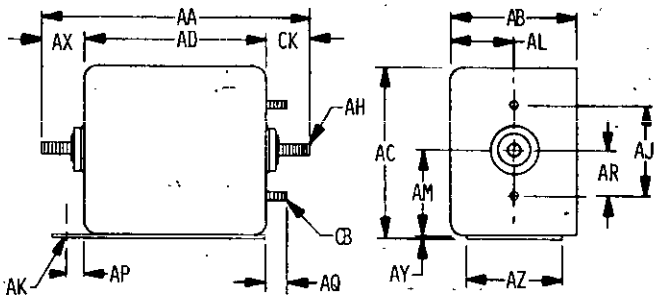


NOTE: TERMINAL END VIEWS ARE DIMENSIONALLY SYMMETRICAL

060-02-15

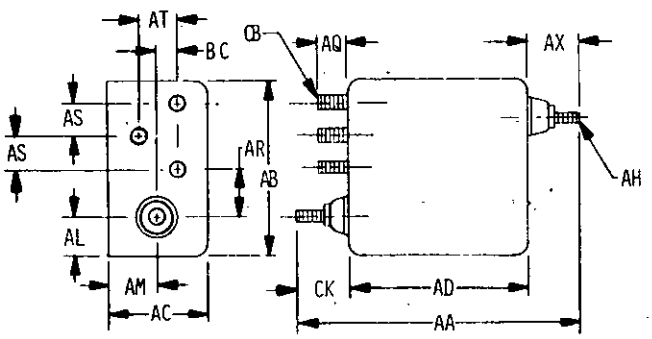


060-02-16

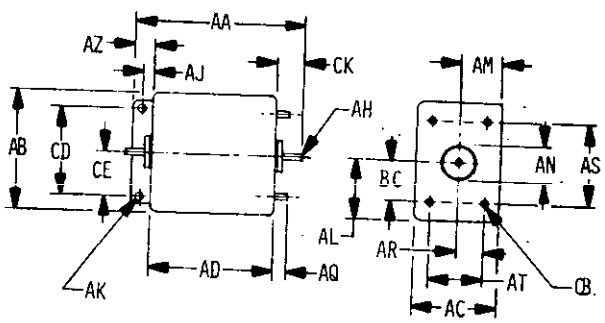

NOTE: TERMINAL END VIEWS ARE DIMENSIONALLY SYMMETRICAL


060-02-17

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

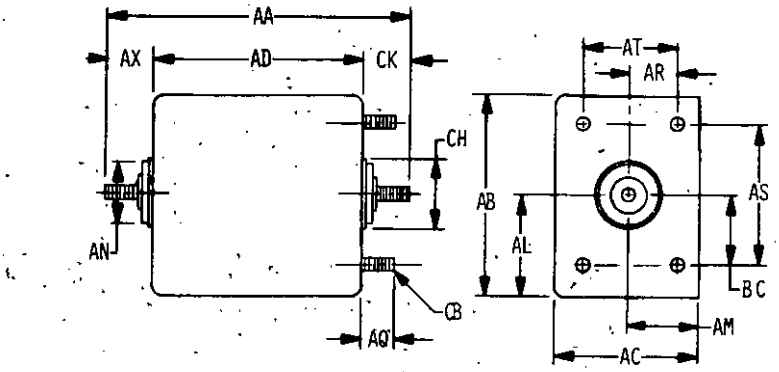


NOTE: TERMINAL END VIEWS ARE DIMENSIONALLY SYMMETRICAL

060-02-18

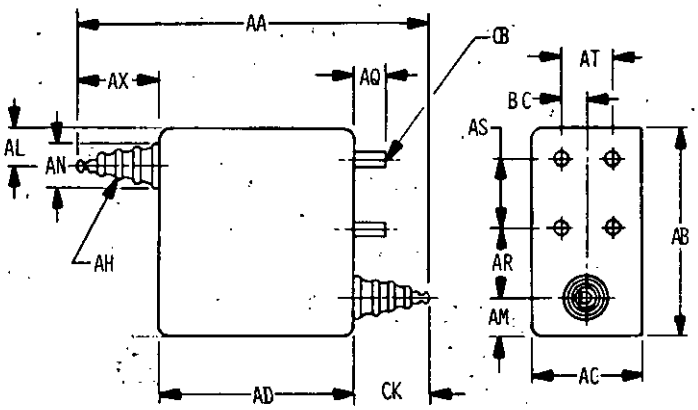


060-02-19

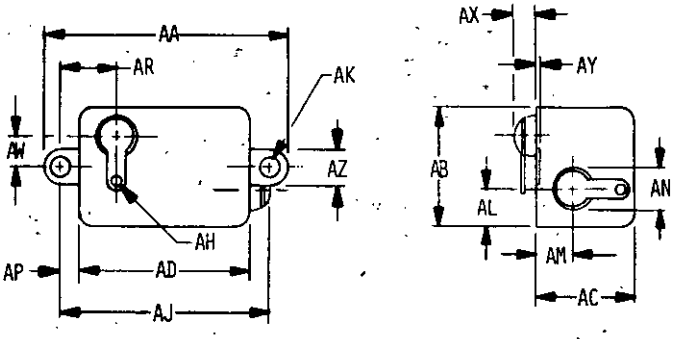


060-02-20

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

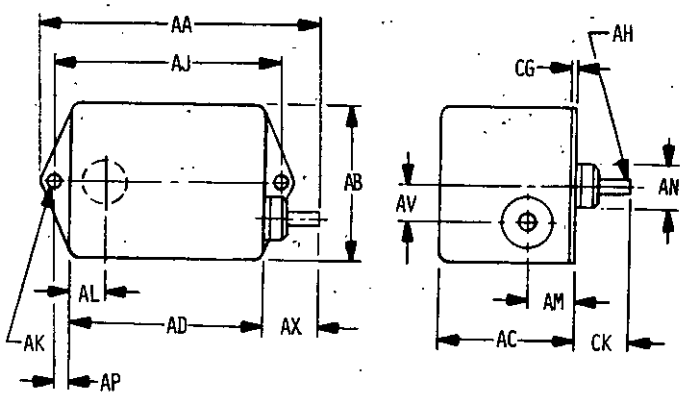


060-02-21

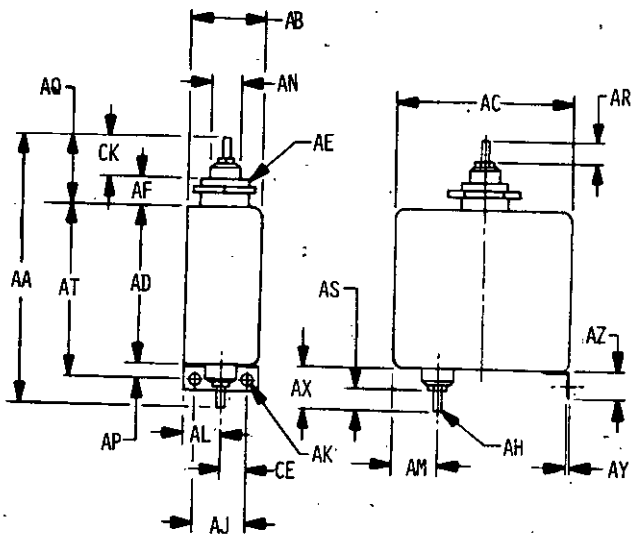


060-02-22

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

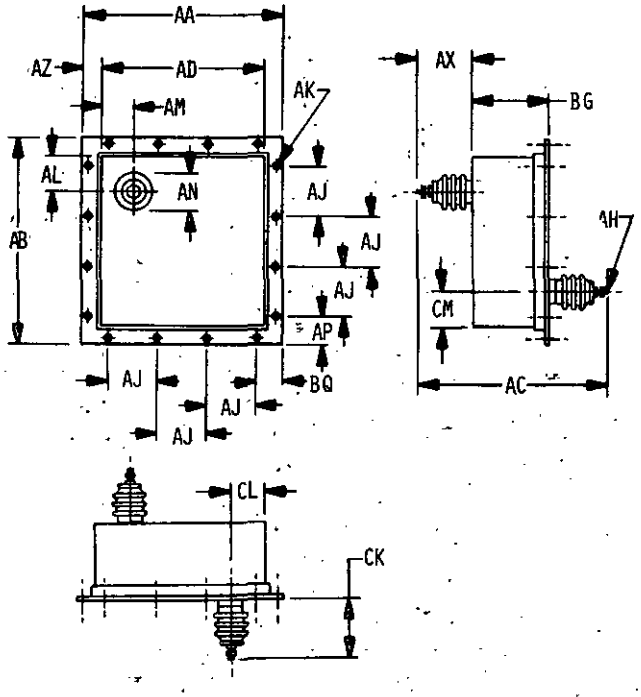


060-02-23

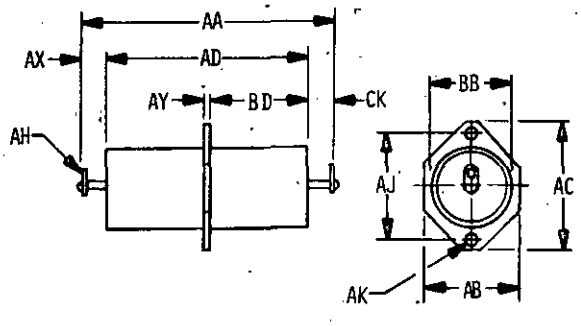


060-02-24

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

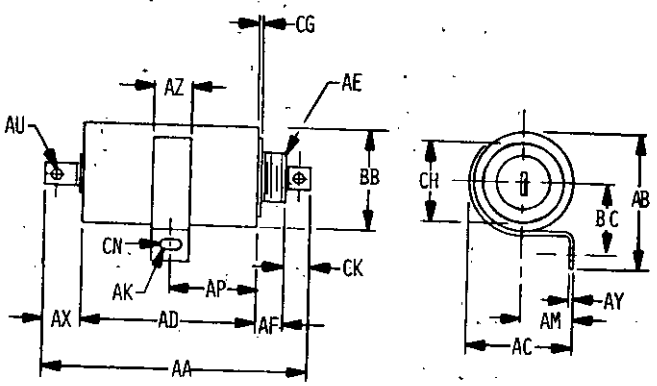


060-02-25

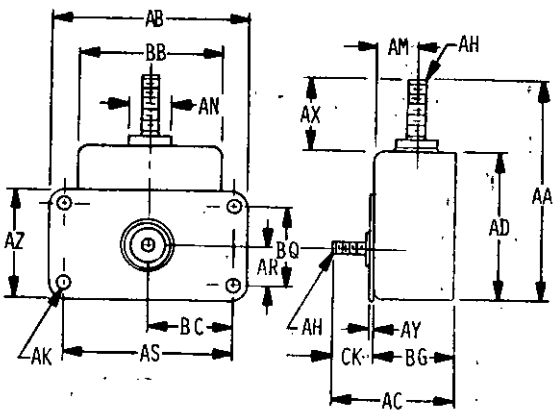


060-02-26

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

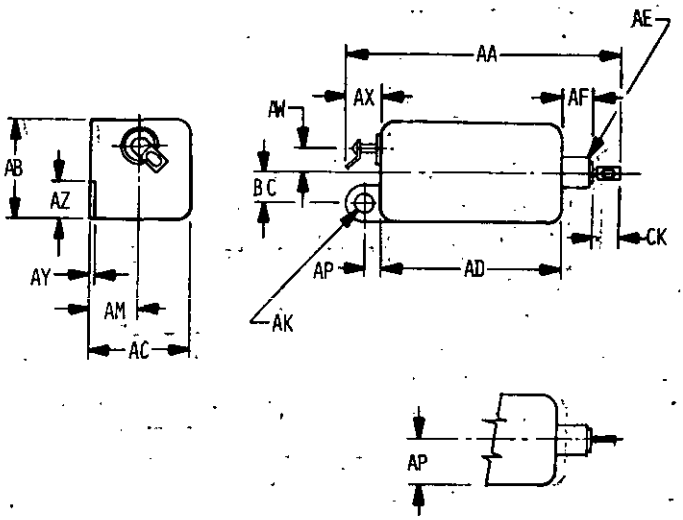


060-02-27

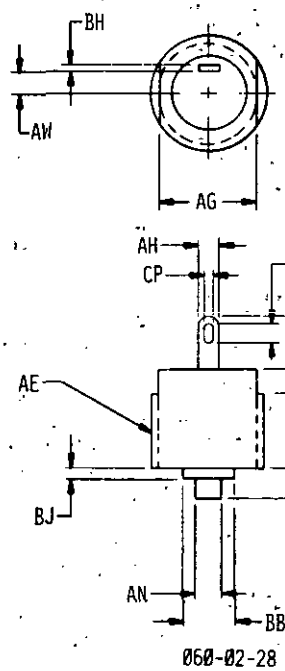


060-02-28

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

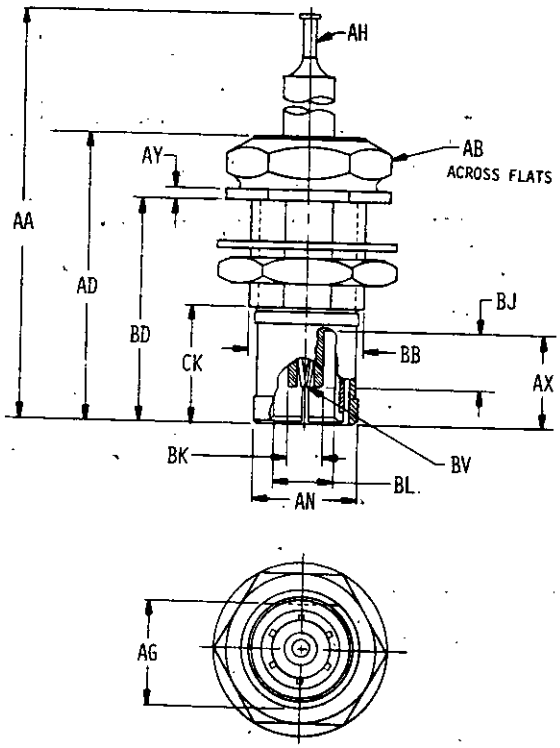


060-02-29

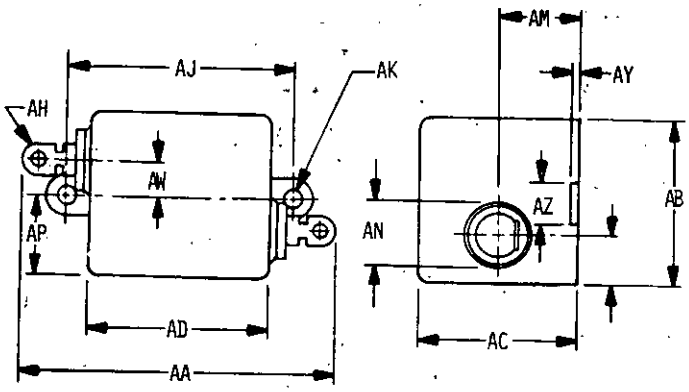


NOTE: TERMINAL END VIEWS ARE DIMENSIONALLY SYMMETRICAL

060-03-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

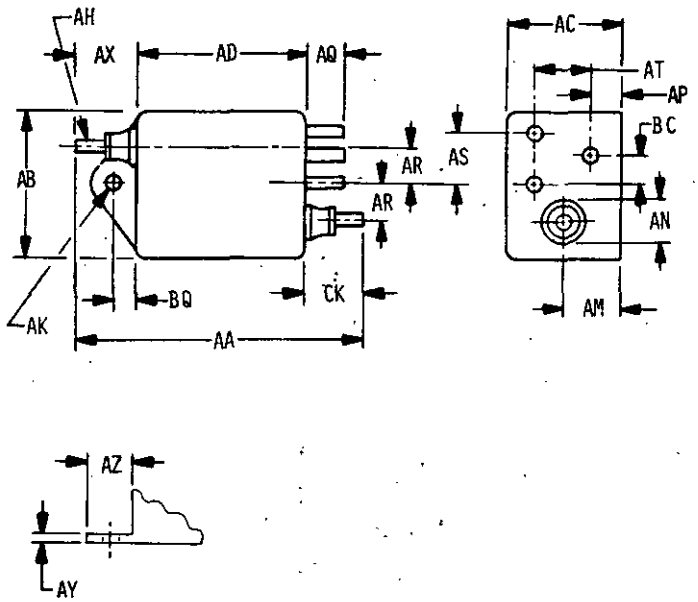


060-03-2

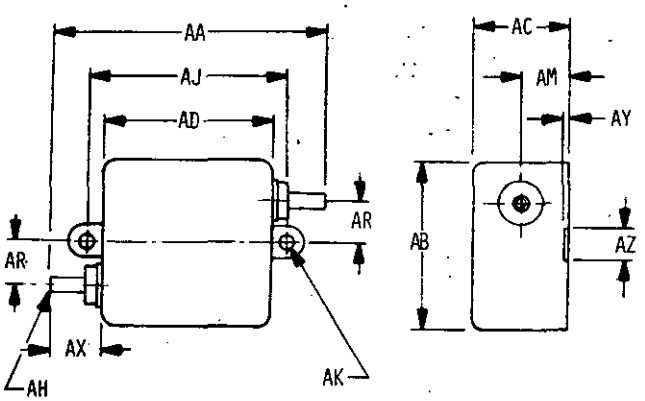


NOTE: TERMINAL END VIEWS ARE DIMENSIONALLY SYMMETRICAL

060-03-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

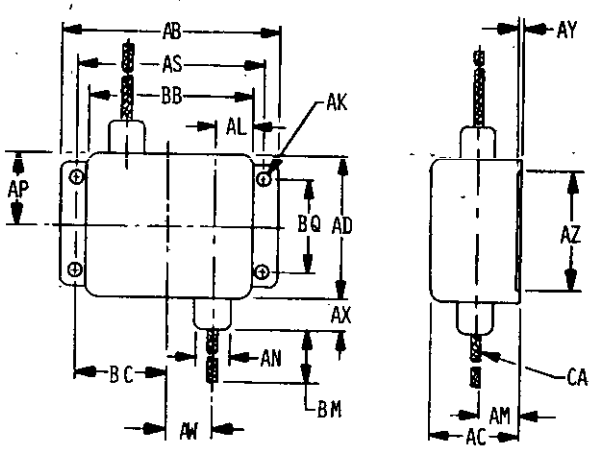


060-03-4

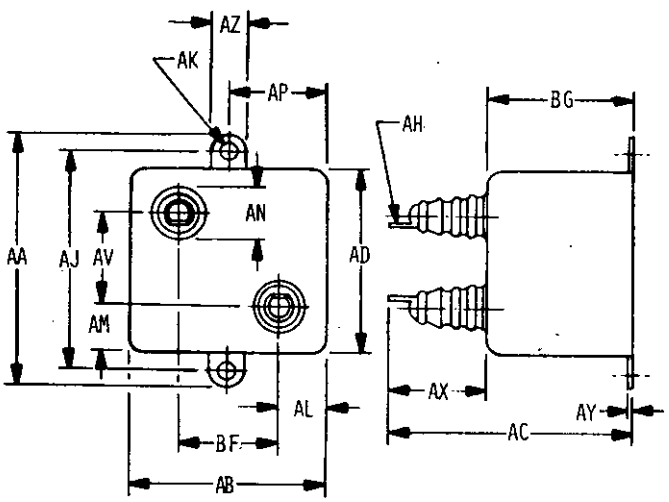


060-03-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

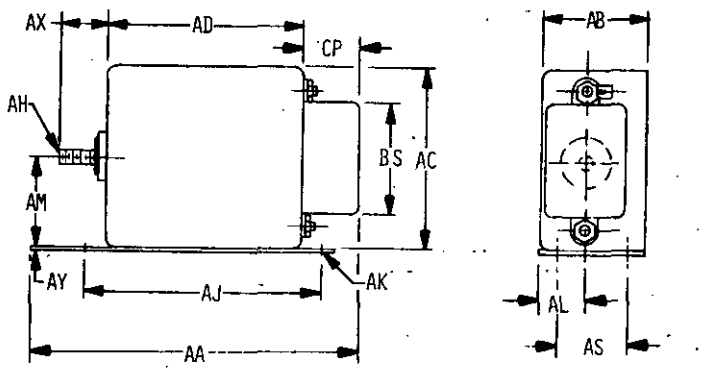


060-03-6

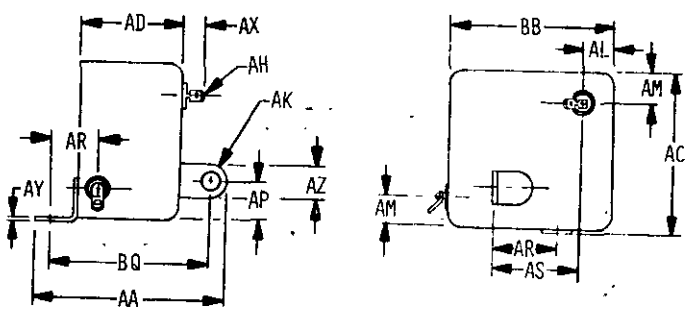


NOTE: MOUNTING BRACKETS ARE IDENTICAL

060-03-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

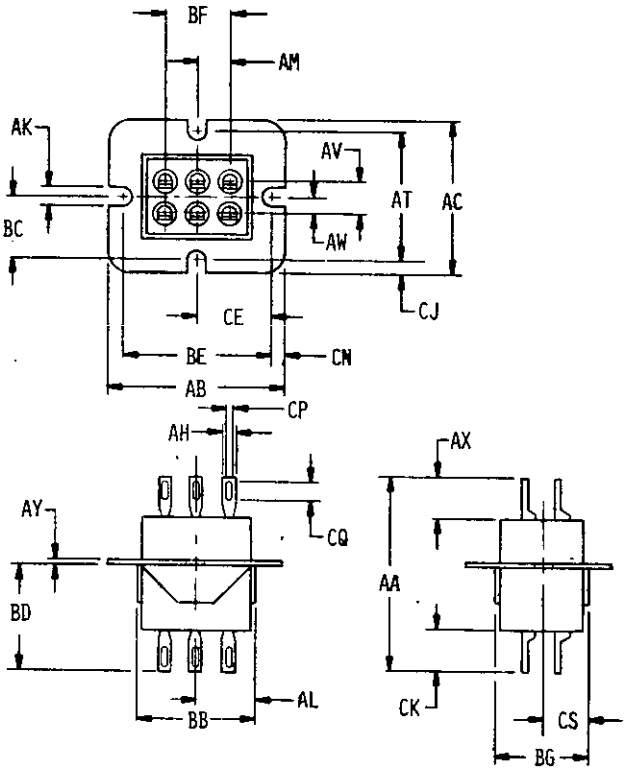


060-03-8

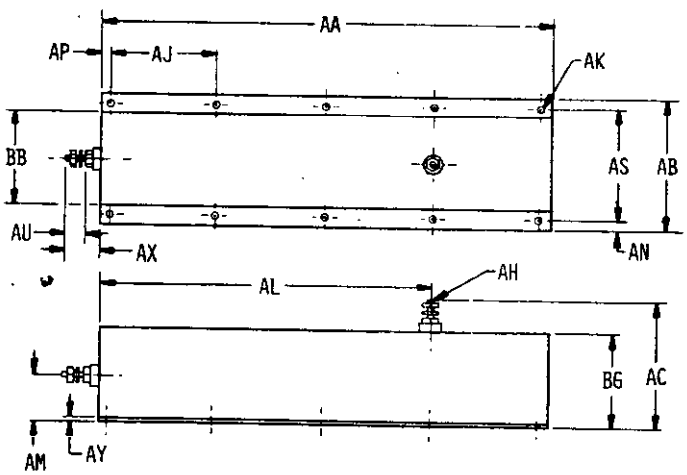


060-03-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

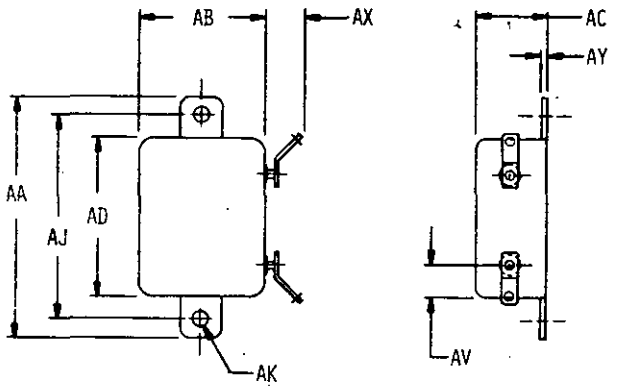


060-03-10

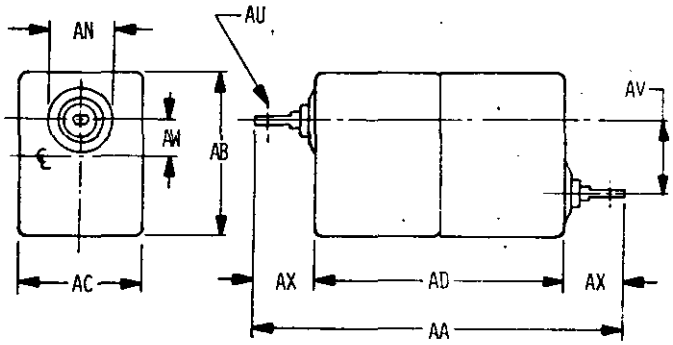

NOTE: TERMINAL END VIEWS ARE DIMENSIONALLY SYMMETRICAL


060-04-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

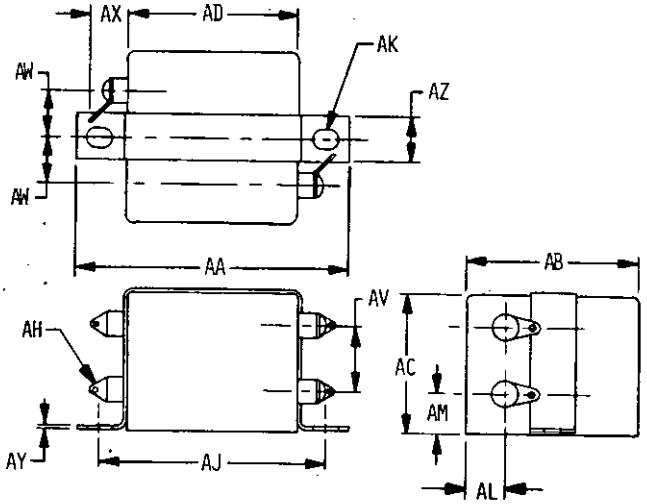

NOTE: TERMINAL END VIEWS ARE DIMENSIONALLY SYMMETRICAL


060-05-1

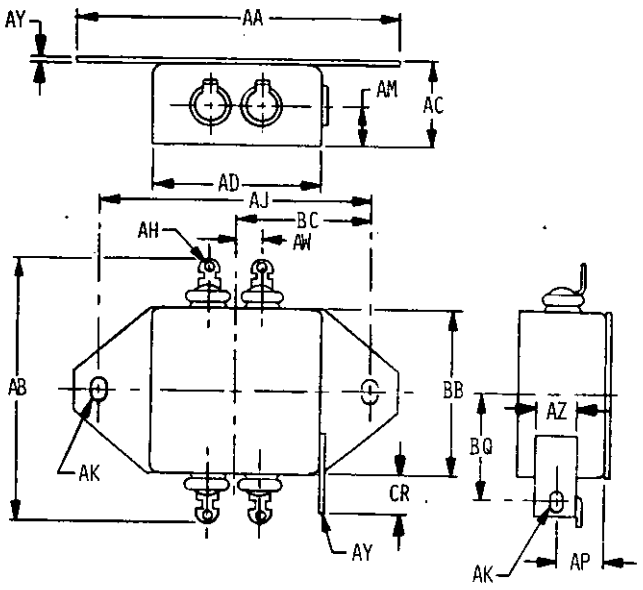

NOTE: TERMINAL END VIEWS ARE DIMENSIONALLY SYMMETRICAL


060-05-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

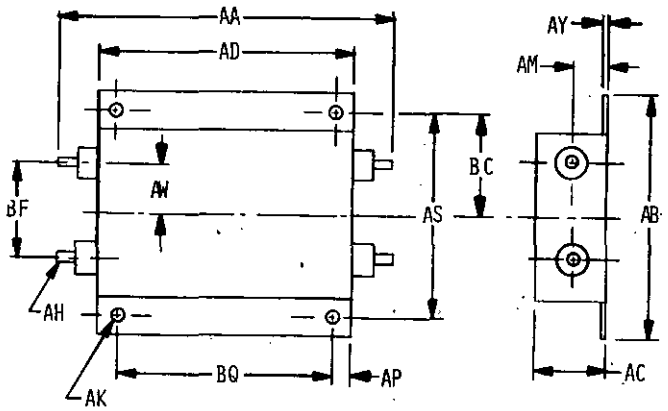


NOTE: TERMINAL END VIEWS ARE DIMENSIONALLY SYMMETRICAL

060-05-3

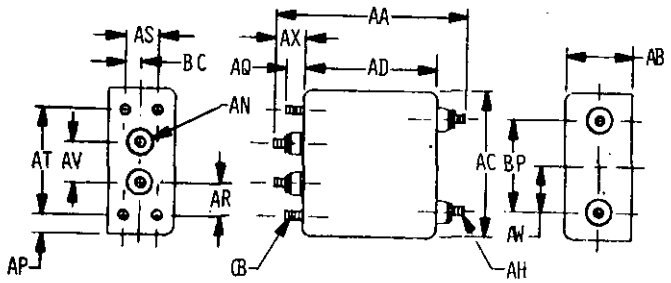


060-05-4

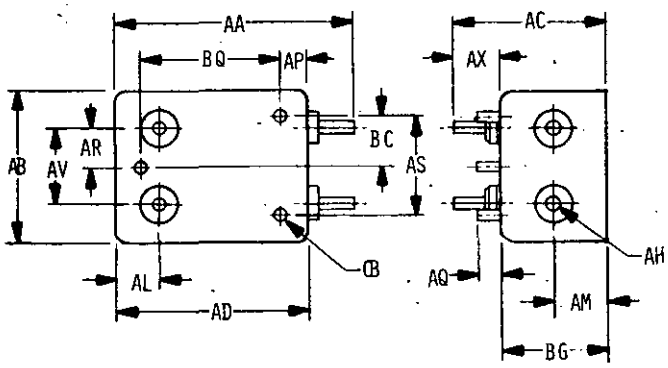


060-05-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

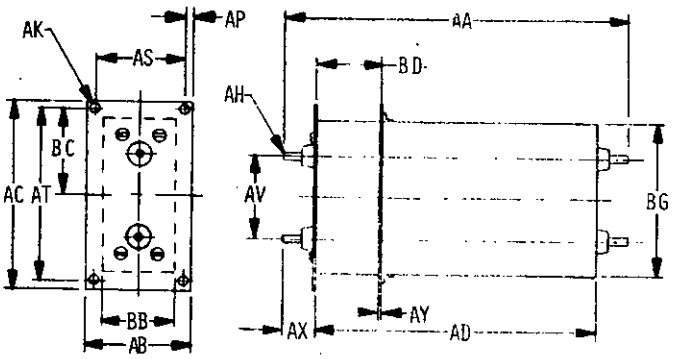


NOTE: TERMINAL END VIEWS ARE DIMENSIONALLY SYMMETRICAL

MIL-STD-35-6

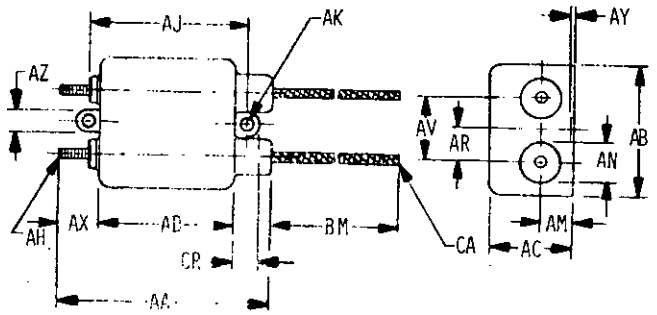

MIL-STD-35-7


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

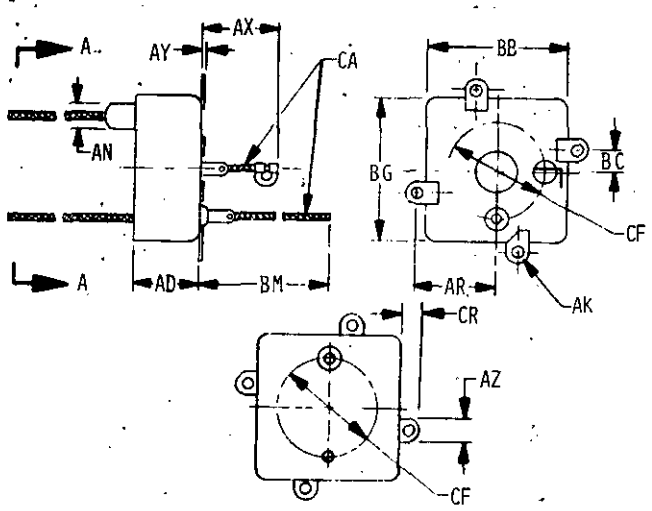

VIEW A-A


060-05-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

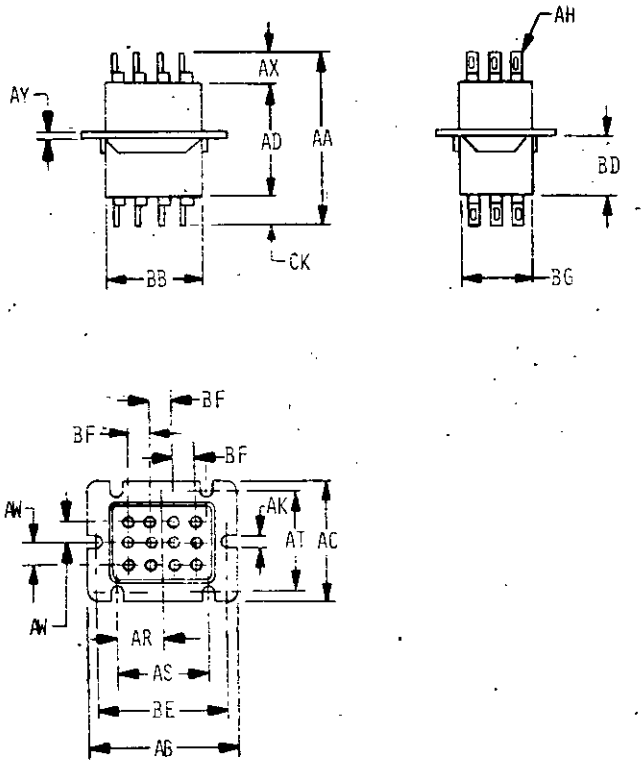



060-06-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

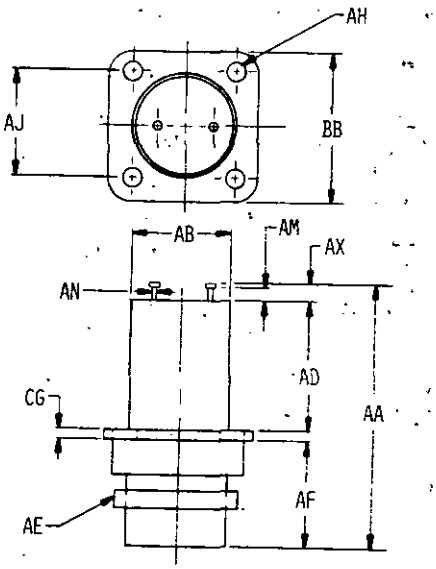


Ø6Ø-Ø6-2



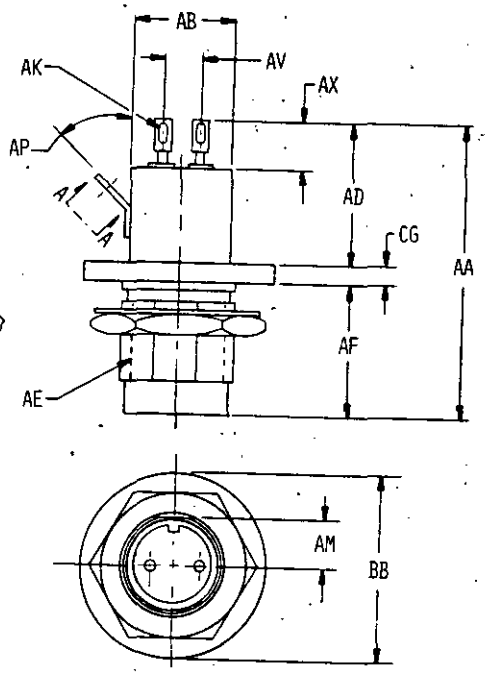


Ø6Ø-Ø6-3


Source: https://assist.dla.mil -- Downloaded: 2026Ø1Ø-26T07:23Z
Check the source to verify that this is the current version before use.

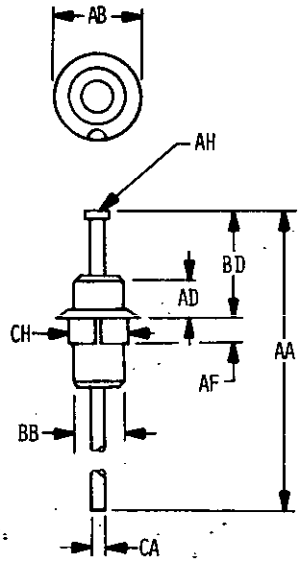

060-07-1

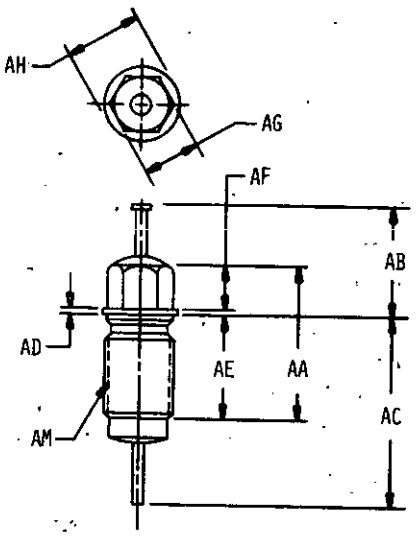


060-07-2

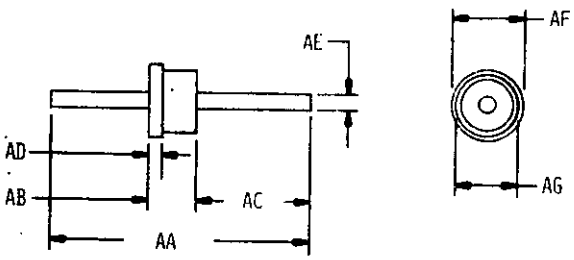


060-07-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

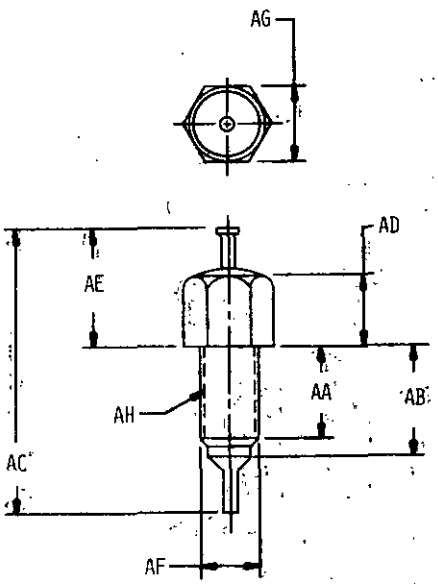


060-07-4

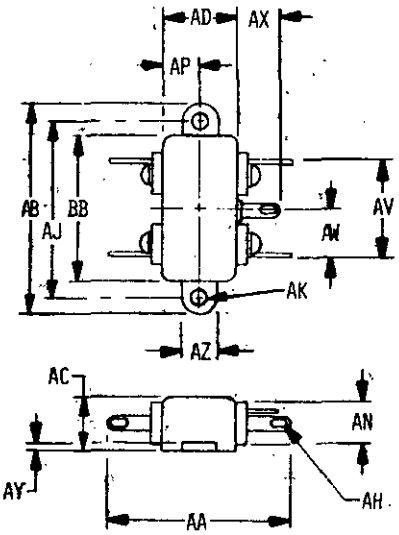


060-08-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

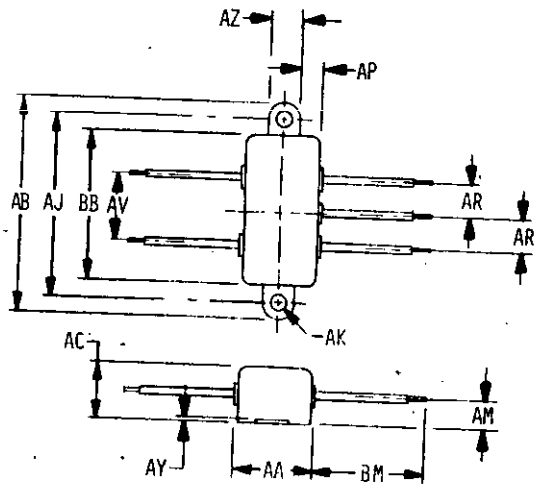


060-08-3

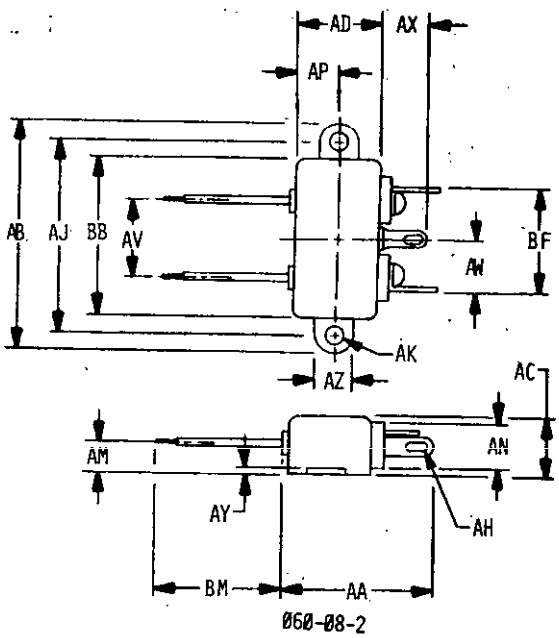


060-08-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

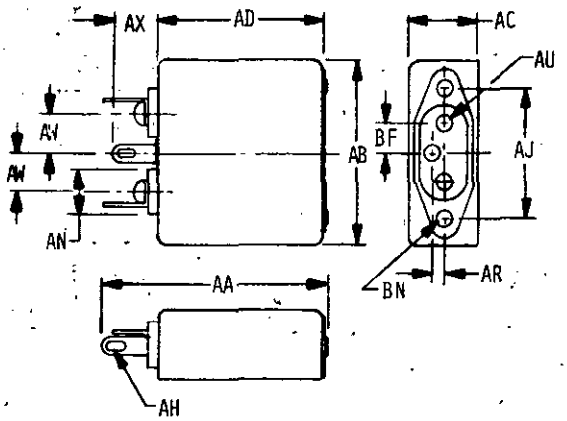


060-08-4

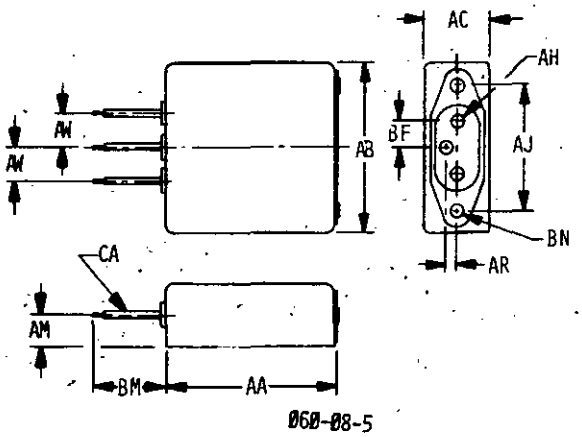


060-08-5


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

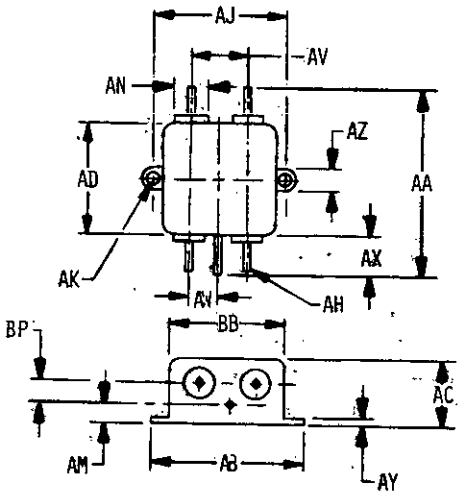


060-08-6

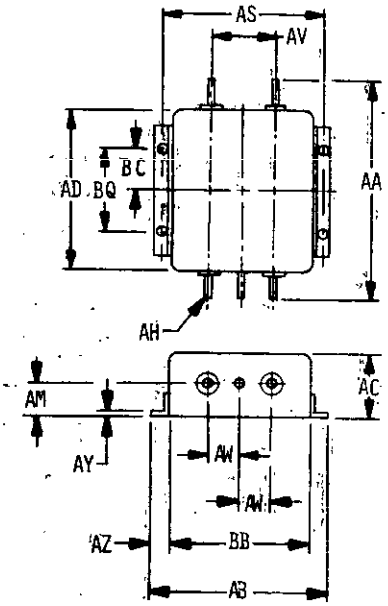

060-08-7

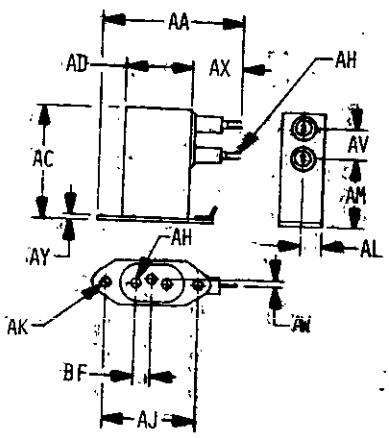


060-08-8

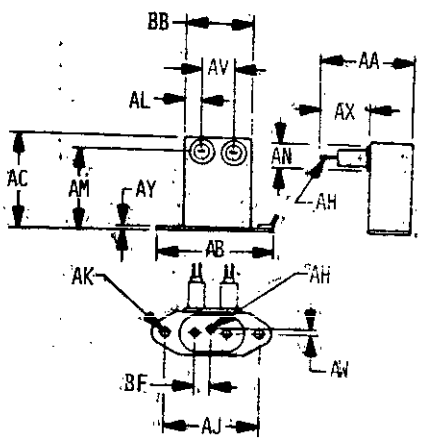


060-08-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

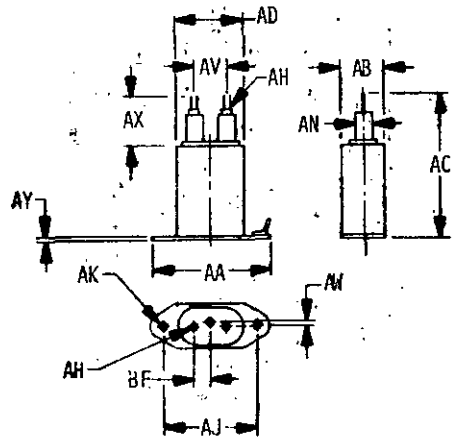


060-08-10

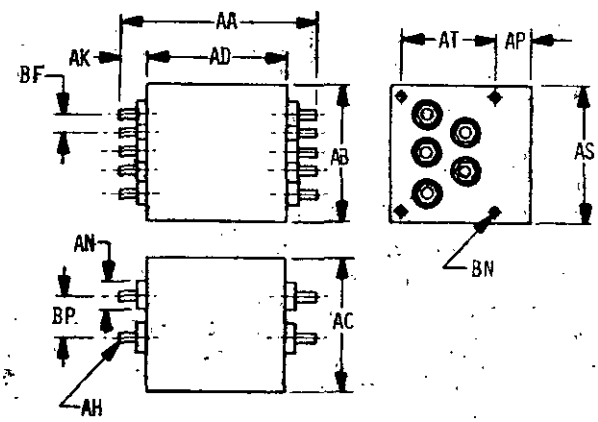


NOTE: TERMINAL END VIEWS ARE DIMENSIONALLY SYMMETRICAL

060-08-11

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

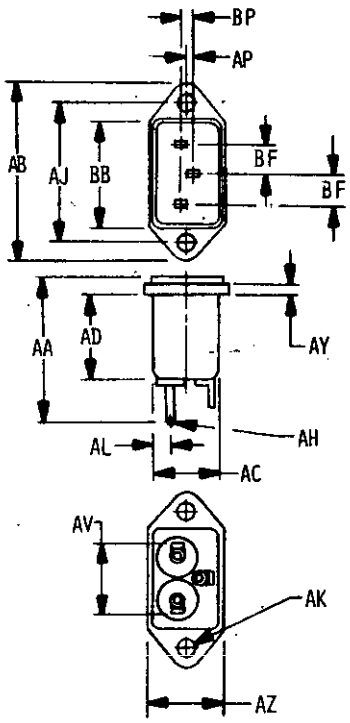


060-08-12

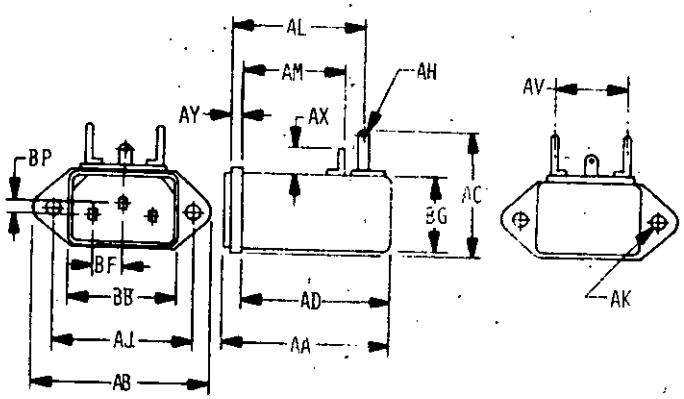


060-08-13


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

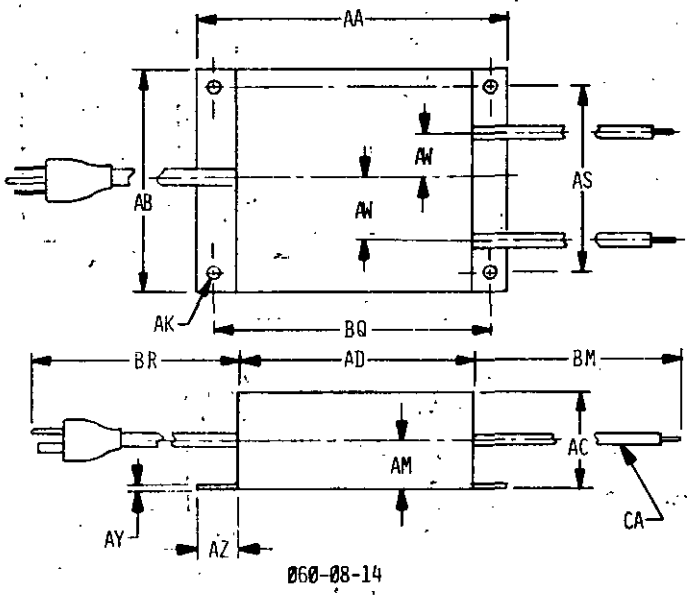

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

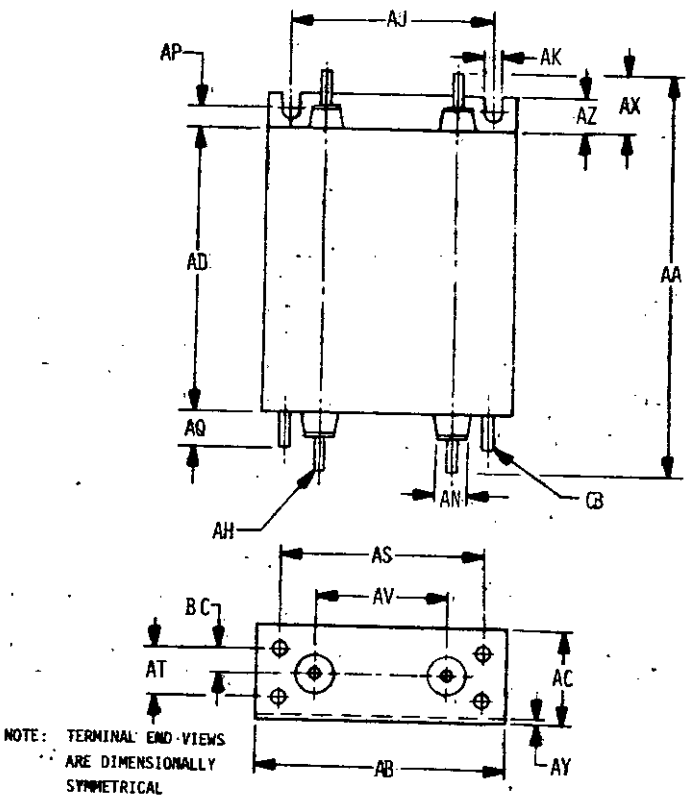


060-08-15

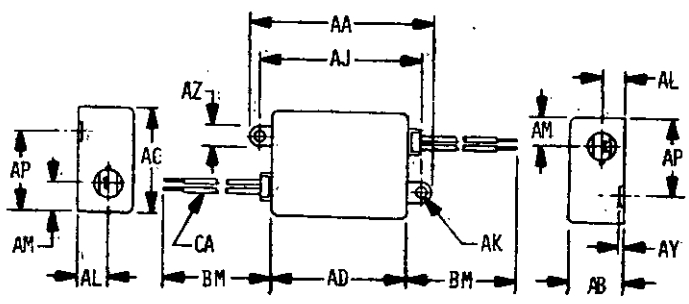


060-08-16


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

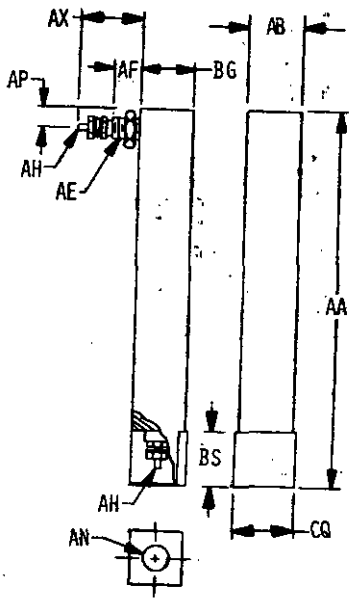

Ø6Ø-Ø8-17

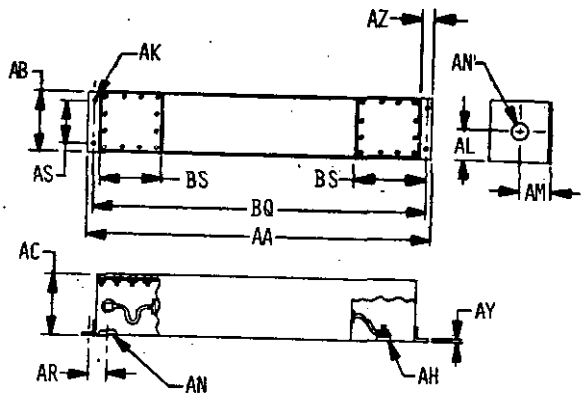


Ø6Ø-Ø8-18

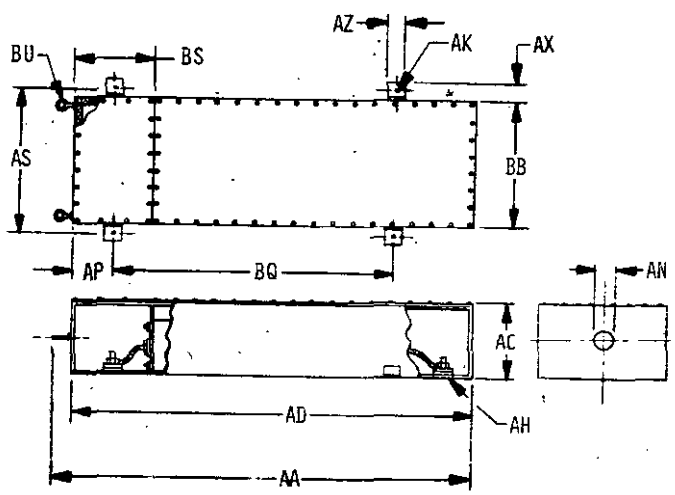


Ø6Ø-Ø8-19


Source: https://assist.dla.mil -- Downloaded: 2026Ø1-26T07:23Z
Check the source to verify that this is the current version before use.

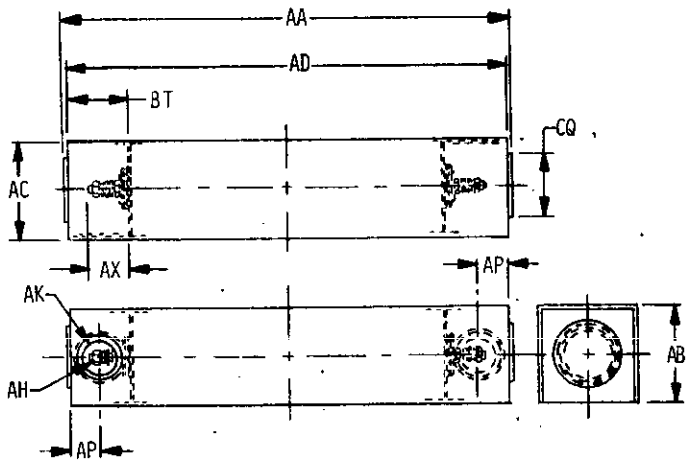

060-08-20

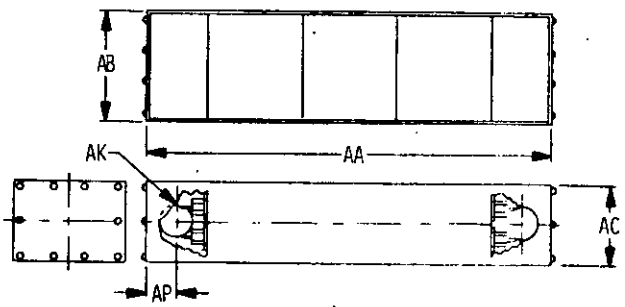


060-08-21

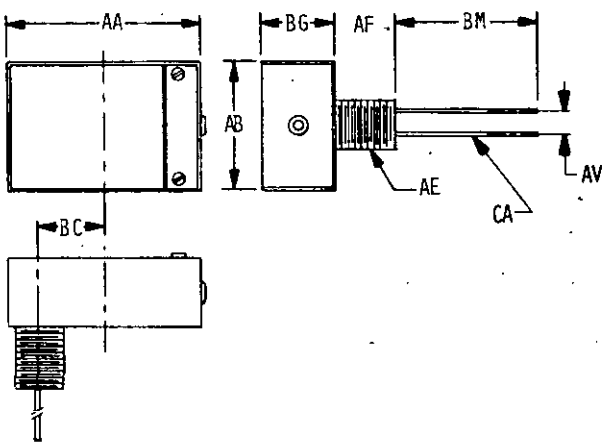


060-08-22

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

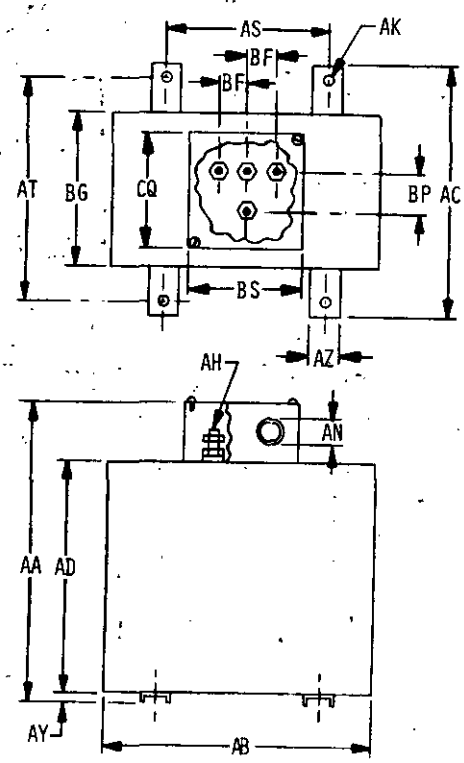


060-08-23

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

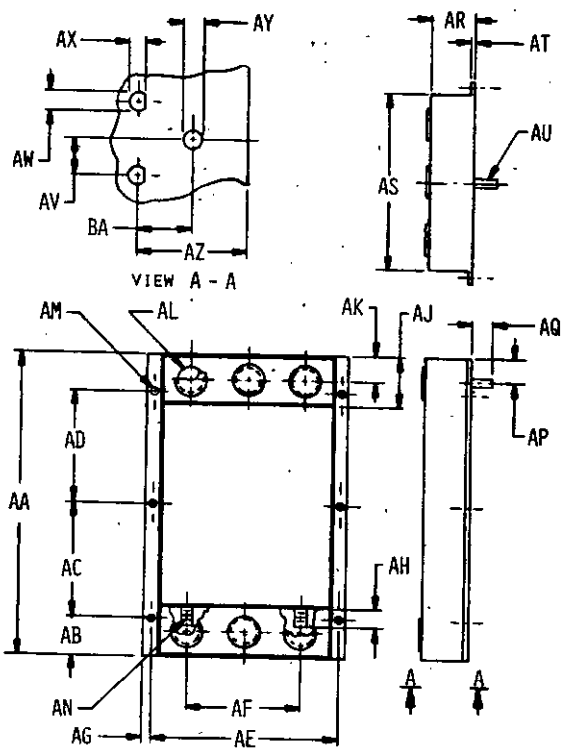


060-08-24

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

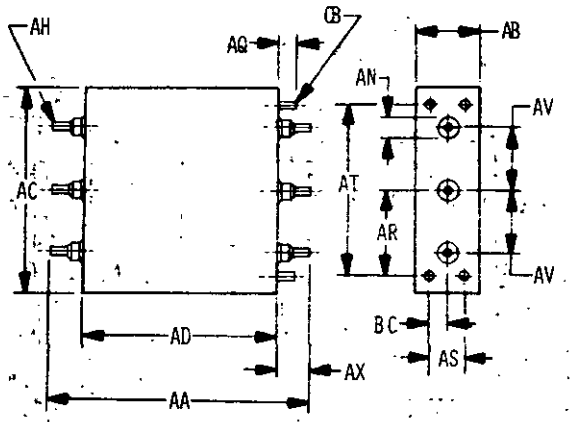

NOTE: TERMINAL END VIEWS ARE DIMENSIONALLY SYMMETRICAL.


060-09-1

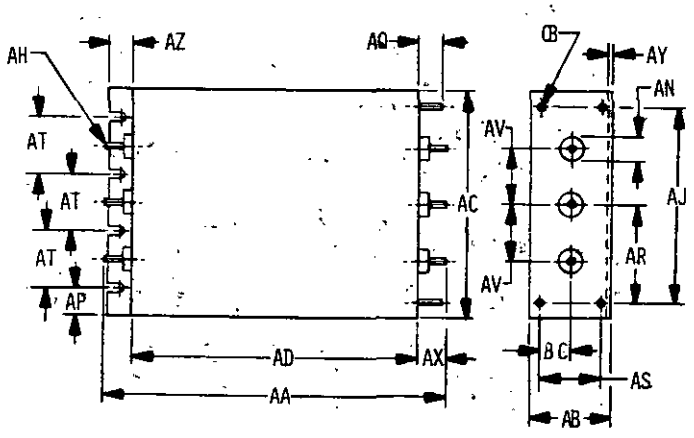

NOTE: TERMINAL END VIEWS ARE DIMENSIONALLY SYMMETRICAL


060-09-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

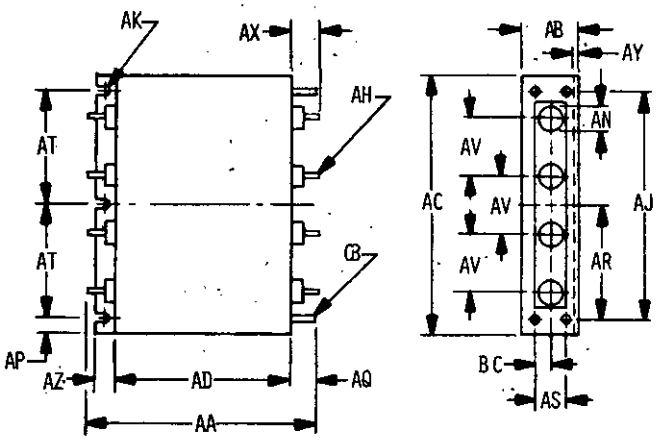

NOTE: TERMINAL END VIEWS ARE DIMENSIONALLY SYMMETRICAL


060-10-1

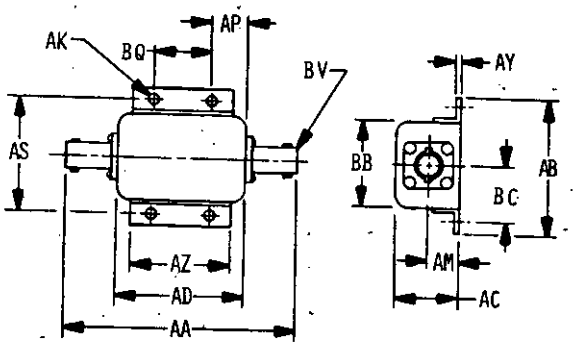

NOTE: TERMINAL END VIEWS ARE DIMENSIONALLY SYMMETRICAL


060-11-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

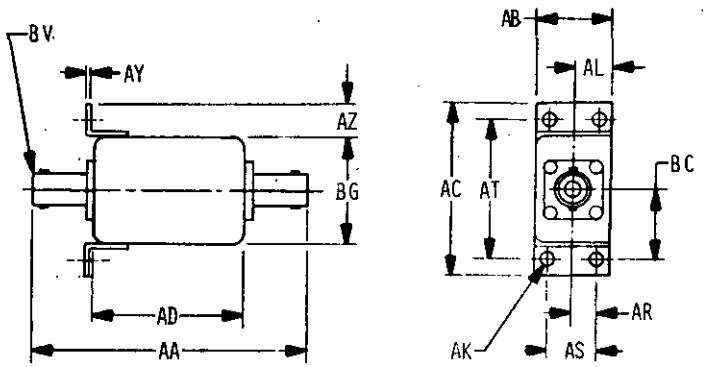


NOTE: TERMINAL END VIEWS ARE DIMENSIONALLY SYMMETRICAL

060-11-2

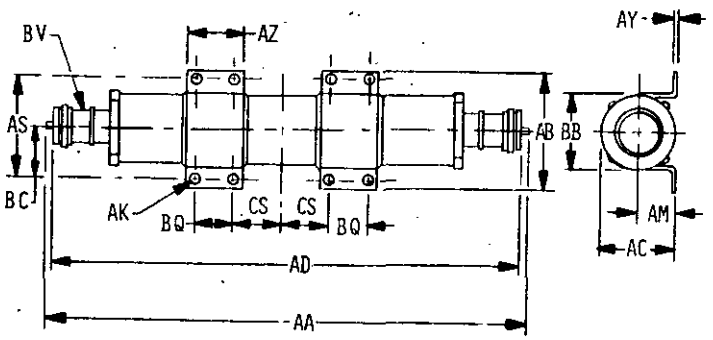

060-11-3



060-12-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	12	1410	110	1473	114	1578	30
0102	12	1411	112	1475	116	1580	30
0103	12	1412	112	1476	116	1582	30
0104	12	1413	112	1477	64	1584	30
0105	12	1414	112	1478	100	1586	30
0107	14	1416	112	1480	118	1588	30
0108	14	1418	110	1482	108	1590	30
0700	12	1419	112	1486	100	1592	30
0800	12	1420	112	1488	100	1594	30
1003	12	1421	112	1490	118	1596	30
1004	12	1426	120	1494	108	1598	30
1005	12	1427	120	1495	108	1600	32
1006	12	1428	120	1497	76	1602	32
1008	12	1429	78	1498	76	1604	32
1009	26	1430	122	1500	102	1606	32
1371	76	1431	120	1502	102	1608	32
1372	78	1432	80	1504	102	1609	46
1373	76	1433	110	1508	102	1610	48
1374	120	1435	120	1509	102	1611	46
1375	112	1436	120	1511	76	1612	48
1376	76	1438	120	1520	78	1613	46
1377	76	1439	122	1522	76	1614	48
1378	76	1446	114	1523	76	1615	46
1380	74	1447	116	1524	76	1616	48
1381	78	1448	116	1533	116	1617	46
1383	78	1449	80	1534	116	1618	50
1384	74	1451	100	1535	118	1619	46
1386	74	1452	122	1536	118	1620	50
1387	74	1453	122	1537	120	1621	46
1388	74	1455	114	1538	120	1622	58
1391	80	1456	114	1557	44	1623	46
1394	78	1459	122	1558	44	1624	50
1395	80	1462	122	1562	24	1625	46
1396	78	1464	100	1564	24	1626	58
1397	80	1466	118	1566	24	1627	46
1398	78	1467	118	1568	24	1628	58
1400	78	1468	102	1570	24	1629	46
1404	78	1469	114	1572	24	1630	58
1406	80	1470	118	1574	24	1631	46
1407	74	1471	102	1576	26	1632	60

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1633	48	1710	82	1792	124	2828	73
1634	60	1712	82	1794	124	2829	73
1635	48	1714	82	1796	124	2830	73
1636	60	1716	82	1800	124	2831	73
1637	48	1718	82	1802	124	2832	73
1638	60	1720	84	1804	124	2833	73
1639	48	1722	84	1806	124	2834	73
1640	60	1724	84	1808	124	2835	73
1641	48	1726	84	1810	126	2836	73
1642	60	1728	84	1812	126	2837	73
1643	48	1730	84	1814	126	2838	73
1644	60	1732	84	1816	126	2839	73
1646	60	1734	84	2800	73	2840	73
1648	60	1736	84	2801	73	2841	73
1650	60	1740	106	2802	73	2842	73
1652	60	1742	106	2803	73	2843	73
1654	60	1744	106	2804	73	2844	73
1656	60	1746	106	2805	73	2845	73
1658	62	1748	106	2806	73	2846	73
1660	62	1750	106	2807	73	2847	73
1662	62	1752	108	2808	73	2848	73
1664	62	1754	108	2809	73	2849	73
1666	62	1756	108	2810	73	2850	73
1668	62	1758	108	2811	73	2851	73
1670	62	1760	108	2812	73	2852	73
1672	62	1762	108	2813	73	2853	73
1674	62	1764	108	2814	73	2854	73
1676	62	1766	108	2815	73	2855	73
1678	68	1768	108	2816	73	2856	73
1680	68	1770	108	2817	73	2857	73
1682	70	1772	110	2818	73	2858	73
1684	70	1774	110	2819	73	2859	73
1686	70	1776	110	2820	73	2860	73
1688	70	1778	110	2821	73	2861	73
1692	74	1780	110	2822	73	2862	73
1694	74	1782	110	2823	73	2863	73
1700	82	1784	110	2824	73	2864	73
1702	82	1786	124	2825	73	2865	73
1704	82	1788	124	2826	73	2866	73
1708	82	1790	124	2827	73	2867	73

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2868	73	2908	73	2948	73	2988	73
2869	73	2909	73	2949	73	2989	43
2870	73	2910	73	2950	73	2990	43
2871	73	2911	73	2951	73	2991	43
2872	73	2912	73	2952	73	2992	43
2873	73	2913	73	2953	73	2993	43
2874	73	2914	73	2954	73	3000	37
2875	73	2915	73	2955	73	3001	37
2876	73	2916	73	2956	73	3002	37
2877	73	2917	73	2957	73	3003	37
2878	73	2918	73	2958	73	3004	37
2879	73	2919	73	2959	73	3005	37
2880	73	2920	73	2960	73	3006	37
2881	73	2921	73	2961	73	3007	37
2882	73	2922	73	2962	73	3008	37
2883	73	2923	73	2963	73	3009	37
2884	73	2924	73	2964	73	3010	37
2885	73	2925	73	2965	73	3011	37
2886	73	2926	73	2966	73	3012	37
2887	73	2927	73	2967	73	3013	37
2888	73	2928	73	2968	73	3014	37
2889	73	2929	73	2969	73	3015	37
2890	73	2930	73	2970	73	3016	37
2891	73	2931	73	2971	73	3017	37
2892	73	2932	73	2972	73	3018	37
2893	73	2933	73	2973	73	3019	37
2894	73	2934	73	2974	73	3020	37
2895	73	2935	73	2975	73	3021	37
2896	73	2936	73	2976	73	3022	37
2897	73	2937	73	2977	73	3023	37
2898	73	2938	73	2978	73	3024	37
2899	73	2939	73	2979	73	3025	37
2900	73	2940	73	2980	73	3026	37
2901	73	2941	73	2981	73	3027	37
2902	73	2942	73	2982	73	3028	37
2903	73	2943	73	2983	73	3029	37
2904	73	2944	73	2984	73	3030	37
2905	73	2945	73	2985	73	3031	37
2906	73	2946	73	2986	73	3032	37
2907	73	2947	73	2987	73	3033	37

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3034	37	3074	37	3114	37	3154	39
3035	37	3075	37	3115	37	3155	39
3036	37	3076	37	3116	37	3156	39
3037	37	3077	37	3117	37	3157	39
3038	37	3078	37	3118	37	3158	39
3039	37	3079	37	3119	37	3159	39
3040	37	3080	37	3120	37	3160	39
3041	37	3081	37	3121	37	3161	39
3042	37	3082	37	3122	37	3162	39
3043	37	3083	37	3123	37	3163	39
3044	37	3084	37	3124	39	3164	39
3045	37	3085	37	3125	39	3165	39
3046	37	3086	37	3126	39	3166	39
3047	37	3087	37	3127	39	3167	39
3048	37	3088	37	3128	39	3168	39
3049	37	3089	37	3129	39	3169	39
3050	37	3090	37	3130	39	3170	39
3051	37	3091	37	3131	39	3171	39
3052	37	3092	37	3132	39	3172	39
3053	37	3093	37	3133	39	3173	39
3054	37	3094	37	3134	39	3174	39
3055	37	3095	37	3135	39	3175	39
3056	37	3096	37	3136	39	3176	39
3057	37	3097	37	3137	39	3177	39
3058	37	3098	37	3138	39	3178	39
3059	37	3099	37	3139	39	3179	39
3060	37	3100	37	3140	39	3180	39
3061	37	3101	37	3141	39	3181	39
3062	37	3102	37	3142	39	3182	39
3063	37	3103	37	3143	39	3183	39
3064	37	3104	37	3144	39	3184	39
3065	37	3105	37	3145	39	3185	39
3066	37	3106	37	3146	39	3186	39
3067	37	3107	37	3147	39	3187	39
3068	37	3108	37	3148	39	3188	39
3069	37	3109	37	3149	39	3189	39
3070	37	3110	37	3150	39	3190	39
3071	37	3111	37	3151	39	3191	39
3072	37	3112	37	3152	39	3192	39
3073	37	3113	37	3153	39	3193	39

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3194	39	3236	39	3276	41	3316	41
3195	39	3237	39	3277	41	3317	41
3196	39	3238	39	3278	41	3318	41
3197	39	3239	39	3279	41	3319	41
3200	39	3240	39	3280	41	3320	41
3201	39	3241	39	3281	41	3321	41
3202	39	3242	39	3282	41	3322	41
3203	39	3243	39	3283	41	3323	41
3204	39	3244	39	3284	41	3324	41
3205	39	3245	39	3285	41	3325	41
3206	39	3246	39	3286	41	3326	41
3207	39	3247	39	3287	41	3327	41
3208	39	3248	39	3288	41	3328	41
3209	39	3249	39	3289	41	3329	41
3210	39	3250	39	3290	41	3330	41
3211	39	3251	39	3291	41	3331	41
3212	39	3252	39	3292	41	3332	41
3213	39	3253	39	3293	41	3333	41
3214	39	3254	39	3294	41	3334	41
3215	39	3255	39	3295	41	3335	41
3216	39	3256	41	3296	41	3336	41
3217	39	3257	41	3297	41	3337	41
3218	39	3258	41	3298	41	3338	41
3219	39	3259	41	3299	41	3339	41
3220	39	3260	41	3300	41	3340	41
3221	39	3261	41	3301	41	3341	41
3222	39	3262	41	3302	41	3342	41
3223	39	3263	41	3303	41	3343	41
3224	39	3264	41	3304	41	3344	41
3225	39	3265	41	3305	41	3345	41
3226	39	3266	41	3306	41	3346	41
3227	39	3267	41	3307	41	3347	41
3228	39	3268	41	3308	41	3348	41
3229	39	3269	41	3309	41	3349	41
3230	39	3270	41	3310	41	3350	41
3231	39	3271	41	3311	41	3351	41
3232	39	3272	41	3312	41	3352	41
3233	39	3273	41	3313	41	3353	41
3234	39	3274	41	3314	41	3354	41
3235	39	3275	41	3315	41	3355	41

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3356	41	4666	104	4736	96	4822	68
3357	41	4667	104	4737	96	4825	68
3358	41	4669	90	4738	96	4829	92
3359	41	4671	90	4739	96	4830	90
3360	41	4672	104	4740	96	4831	92
3361	41	4674	104	4741	96	4834	90
3362	41	4675	104	4742	96	4835	92
3363	41	4677	104	4743	90	4836	90
3364	41	4678	122	4745	94	4838	92
3365	41	4683	104	4746	94	4839	92
3366	41	4684	102	4748	94	4842	56
3367	41	4685	102	4749	90	4844	56
3368	41	4686	102	4750	90	4845	56
3369	41	4689	88	4751	90	4846	56
3370	41	4691	90	4752	90	4847	54
3371	41	4692	90	4765	94	4848	56
3372	41	4694	90	4766	94	4849	52
3373	41	4695	90	4770	94	4850	56
3374	41	4698	90	4771	94	4853	66
3375	41	4700	88	4772	94	4854	56
3376	41	4701	88	4773	94	4855	56
3377	41	4703	102	4782	92	4856	54
3378	41	4707	116	4788	64	4859	52
3379	41	4708	116	4790	66	4861	56
3380	41	4709	116	4791	64	4862	56
3381	41	4713	114	4793	66	4863	44
3382	41	4714	114	4795	64	4864	44
3383	41	4715	114	4798	64	4865	44
3384	41	4717	58	4799	64	4867	56
3385	41	4718	88	4803	64	4868	44
3386	41	4719	114	4805	64	4869	58
3387	41	4722	114	4809	68	4870	58
3388	41	4723	114	4810	68	4874	54
3389	41	4726	114	4811	68	4875	54
3390	41	4729	118	4812	68	4878	92
3391	41	4730	118	4813	64	4884	50
4662	104	4731	118	4814	68	4885	52
4663	104	4732	96	4815	64	4886	52
4664	106	4734	94	4819	68	4890	66
4665	106	4735	98	4820	68	4891	54

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4892	44	5071	16	6328	98	6997	34
4893	44	6200	116	6329	98	6998	34
4894	50	6201	120	6330	98	6999	34
4897	58	6202	66	6331	98	7001	126
4900	54	6203	102	6332	100	7002	126
4901	50	6204	104	6333	100	7003	126
4902	54	6205	106	6359	74	7004	126
4904	16	6206	66	6369	12	7005	126
4905	16	6207	66	6370	94	7021	34
4906	50	6210	44	6372	126	7022	32
4908	50	6226	44	6696	86	7023	32
4950	26	6233	44	6697	86	7024	34
4969	66	6239	44	6698	86	7301	16
4970	66	6250	42	6699	86	7302	16
4971	66	6251	42	6700	86	7572	26
4975	122	6263	44	6701	86	7576	26
4976	122	6264	44	6706	88	7577	26
4977	122	6265	44	6707	88	7580	28
4978	118	6267	58	6710	86	7591	18
4979	118	6272	42	6713	86	7592	18
4980	80	6273	42	6870	126	7594	18
4981	90	6277	42	6873	12	7595	18
4983	86	6279	92	6874	14	7597	18
4984	82	6280	54	6920	88	7598	18
4985	80	6292	52	6921	88	7600	20
4986	80	6293	52	6922	88	7601	20
4989	90	6294	52	6923	86	7602	20
4991	80	6296	110	6924	88	7603	20
5000	58	6300	52	6929	84	7604	20
5046	16	6308	54	6930	86	7605	20
5048	16	6310	54	6937	86	7609	20
5052	16	6311	52	6939	88	7610	20
5054	16	6312	52	6941	14	7611	20
5060	24	6320	96	6942	14	7612	22
5061	24	6321	96	6991	128	7613	22
5062	24	6322	96	6992	128	7614	22
5063	24	6323	96	6993	128	7618	22
5068	16	6324	98	6994	128	7619	22
5069	16	6325	98	6995	128	7620	22
5070	16	6326	98	6996	34	7621	22

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
7622	22						
7623	22						
7627	22						
7628	22						
7629	128						
7630	128						
7631	18						
7632	18						
7633	18						
7634	18						
7635	18						
7636	18						
7637	20						
7638	20						
7639	20						
7641	22						
7645	18						
7646	18						
7647	20						

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Acceleration	42
Additional Part Marking	128
Additional Requirements	128
Altitude Rating	24
Aperture Cards Required	14
Applicable Documents	128
Base Document	12
Capacitance	46
Circuit Configuration	32
City, State, Zip	12
Classification	24
Company Name/Command	12
Configuration	26
Contract Number/Office Symbol	12
Control, Source	12
Control, Specification	14
Current Rating	18
Date	12
DC Resistance	48
Definition of Hermetic Sealing	128
Design and Construction	30
Dielectric Withstanding Voltage at Reduced Barometric Pressure	50
Dielectric Withstanding Voltage at Sea Level	54
Discrimination	58
Electrical Characteristics	36
Enclosure	30
Finishes	28
Flammability (External Flame)	60
Flashpoint of Impregnant or Potting Compound	62
Format	12
Frequency Rating	22
Government Design Activity FSCM	12
Humidity	64
Illustrations	26
Immersion	68
Impedance	68
Insertion Loss	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Insulation Resistance	74
Materials	28
Metals	28
Moisture Resistance	78
Mounting Hardware	126
Mounting Means	30
Nomenclature	128
Notes	128
Number of Sections (Circuits)	32
Overload	82
Packaging	128
Part Marking	126
Part Number	14
Part Number Cross-Reference	128
Phone Number	12
Power Rating	18
Quality Assurance Provisions	128
Reliability Screening	84
Requester FSCM	12
Requester's Name	12
Resistance to Soldering Heat	88
Resistance to Solvents	90
Revision of AEDPS Document (Number)	14
Salt Spray	92
Scope	14
Seal	94
Shock, High Impact	100
Shock, Specified Pulse	102
Solderability	104
Source Table	14
Stability at Temperature Extremes	106
Street/Building	12
Superseded Document	128
System Application	12
Tabulated Characteristics	28
Temperature Rating	16
Temperature Rise	108

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Terminal Strength	110
Thermal Shock (Temperature Cycling)	114
Units of Measure	14, 26
Vibration, High Frequency	114
Vibration, Low Frequency	116
Vibration, Random	120
Voltage Drop	124
Voltage Rating	20
Voltage Standing Wave Ratio (VSWR)	124
Weight	32
Workmanship	126

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-25A(MI), dated 15 February 1979 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-25A(MI), dated 15 February 1979 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
DOD-STD-35-25(MI) FILTERS, ELECTRONIC

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:23Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander,
U.S. Army Missile R & D Command
ATTN: DRDMI-ESD
Redstone Arsenal, Alabama 35809

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.