DOD-STD-35-27A(MI)
2 February 1979
SUPERSEDING
MIL-STD-35-27(MI)
2 JANUARY 1974

MILITARY STANDARD

SPRINGS

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

FSC EDS

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Springs
Automated Engineering
Document Preparation System

DOD-STD- 35-27A(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-27A(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for Springs.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	4
	2.1	Issues of documents	4
	2.2	Other publications	5
	3.	DEFINITIONS	6
	4.	GENERAL REQUIREMENTS	7
	4.1	Introduction	7
	4.2	Specification Requirement Sheet (SRS)	7
	4.3	Configuration	7
	4.3.1	Dimensions	7
	4.3.2	Illustrations	7
	4.4	Units of measure	7
	5.	DETAILED REQUIREMENTS	8
	5.1	Introduction	8
	5.2	MSE Formats	8
	5.3	Referenced documents	8
	5.4	Test matrix	8
	5.5	Tabulation	9
	5.6	Keyword Code Index (KCI) and Standard Paragraphs	11
	5.6.1	Interrelationship of Codes	11
	5.6.2	Automatic MSE Data	11
	5.6.3	DOD-STD-35 Tables	11

TABLES

Table	I.	Title Index	3
	II.	Test matrix	9
	III.	Tabulation candidates	10

APPENDICES

Appendix	A.	Illustrations	92
	B.	Characteristic Code Index	106
		Index	110

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for springs.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see Table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil - Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
SPRING, BELLEVILLE	162010	MS75044	
SPRING, COMPRESSION,	162001	MIL-S-6715	HELICAL
		MIL-S-13572	HELICAL EXT
		MS24585	HELICAL
		MS24586	HELICAL, EXT
		MS13806	BRUSH, GEN
		MS39134	MECH, AUTO
		MS51014	SPARK PLUG CA TERMINAL
		MS51015	RETAINER, ELEC
SPRING, COMPRESSION,	162002	MIL-S-6715	STRANDED WIRE
		MIL-S-13572	HELICAL EXT
SPRING, CONSTANT FORCE	162003	MIL-S-6715	
		MIL-S-13572	HELICAL, CRPSN AND EXT
SPRING, ESCAPEMENT	162011	MIL-S-20561	COROSION RES
SPRING, EXTENSION	162004	MIL-S-6715	HELICAL
		MIL-S-13572	HELICAL CRPSN
		MS24586	HELICAL
		MS90296	BAND, PARACHUTE CONTAINER
SPRING, FLAT	162005	MIL-S-6715	
		MIL-S-13572	HELICAL, CPRSN AND EXT
SPRING, GARTER	162006	MIL-S-6715	
		MIL-S-13572	HELICAL, CPRSN AND EXT
SPRING, TORSION, HELICAL	162007	MIL-S-6715	
SPRING, TORSION, SPIRAL	162008	MIL-S-6715	
		MIL-S-13572	HELICAL, CPRSN AND EXT
SPRING, VOLUTE	162009	MIL-S-6715	
		MIL-S-13572	HELICAL, CPRSN AND EXT

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

FEDERAL

QQ-P-416	Plating, Cadmium (Electrodeposited)
QQ-Z-325	Zink Coating, Electrodeposited Requirements For

MILITARY

MIL-S-116	Preservation-packaging, Methods of
MIL-S-6715	Springs: Helical, Aircraft
MIL-S-6866	Inspection, Penetrant Method of
MIL-I-6868	Inspection Process, Magnetic Particle
MIL-H-6875	Heat Treatment of Steels (Aircraft Practice), Process For
MIL-S-13572	Springs, Helical, Compression and Extension
MIL-S-16232	Phosphate Coating, Heavy, Manganese or Zink Base
MIL-S-20561	Spring, Excapement, Corrosion-resisting

STANDARDS

MILITARY

DOD-STD-35	Automated Engineering Document Preparation Systems
MIL-STD-130	Identification Marking of U.S. Property
MIL-STD-186	Protective Finishing Systems for Rockets, Guided Missiles, Support Equipment and Related Materials

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

MIL-STD-271	Nondestructive Testing Requirements for Metals
MIL-STD-810	Environmental Test Methods
MIL-STD-1246	Product Cleanliness Levels and Contamination Control Program
MIL-STD-1312	Fasteners, Test Methods

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTME380	Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, Pa. 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to springs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for a spring, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to springs.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to springs.

4.3.2 Illustrations. Illustrations applicable to springs are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has a capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Test matrix. A test matrix is supplied as a guide for selecting documents to specify tests (see table II). The test matrix presents documents most applicable for use to satisfy the statement "TEST PER (DOC DES)". Any document listed in the Title Index may be used to satisfy the statement. However, the selected document from the Title Index must contain the desired test. Government test method documents and approved industry standards such as ASTM test methods may also be used to satisfy the statement "TEST PER (DOC DES)".

Source: https://assist.dla.mil - Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE II. TEST MATRIX.

DOCUMENT	CODE	TEST						
		Decarburization	Bending-Ductility	Embrittlement Relief	Spring Rate	Surface Defects	Deflection	Solid Height
		2243	2143	2443	3243	3443	2343	3143
QQ-P-416		X			X			
QQ-Z-325				X				
MIL-S-6715			X				X	
MIL-I-6866						X		
MIL-I-6868						X		
MIL-S-13572		X			X		X	X
MIL-S-16232				X				
MIL-S-20561			X					

5.5 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table III provides codes for column headings which may be used for spring characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil --Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE III TABULATION CANDIDATES

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1756	NO OF FREE COILS, MIN	1758	NO OF FREE COILS, MAX	1934	PITCH PER INCHES
1936	PITCH PER MILLIMETER	1926	MANDREL DIA INCHES	1928	MANDREL DIA MM
1808	SHAFT DIA INCHES	1810	SHAFT DIA MM	1720	SPRING TYPE
1882	MIN SPRING RATE LB/IN	1884	MIN SPRING RATE GR/ME	1886	MAX SPRING RATE LB/IN
1888	MAX SPRING RATE GR/ME	2331	DEFLECTION MAX INCHES	2333	DEFLECTION MAX MM
3625	FREE LENGTH IN	3627	FREE LENGTH MM	3131	MAX SOLID HEIGHT MM
3129	MAX SOLID HEIGHT IN				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

5.6 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.6.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.6.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.6.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT	0700
ONE SECTION DOCUMENT	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OR PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6874 THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).

0107

0108 0108.

SCOPE.

SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.

PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.

PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

6941 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.

6942 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE RATING	
MAXIMUM SERVICE (DEGREES CELSIUS)	4905
MAXIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5054
MINIMUM OPERATING (DEGREES CELSIUS)	5068
CLASSIFICATION	
TYPE (DESIGNATION)	1720
GRADE (DESIGNATION)	1722
STYLE (DESIGNATION)	1724
CLASS (DESIGNATION)	1726
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
*UNITS (SELECT ONE)	
U.S. (SELECT ONE)	
INCHES.	7572
FEET.	7573

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	TEMPERATURE RATING.
4905	THE MAXIMUM SERVICE TEMPERATURE RATING SHALL BE 4905 DEGREES CELSIUS.
5054	THE MAXIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5054 DEGREES CELSIUS.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.
	CLASSIFICATION.
1720	TYPE. TYPE 1720 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1722	GRADE. GRADE 1722 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1724	STYLE. STYLE 1724 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1726	CLASS. CLASS 1726 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7573	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN FEET OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONFIGURATION (CONT)	
UNITS (CONT)	
SI (SELECT ONE)	
MILLIMETERS.	7577
METERS.	7578
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950

NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.

TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)

MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)

NOTE: AUTOMATIC WHEN TABLE VII IS USED.

FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)

NOTE: AUTOMATIC WHEN TABLE IX IS USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

7577 ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.

7578 ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN METERS OR DEGREES.

ILLUSTRATIONS.

4950 ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.

MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION	
WIRE TAPER	
LENGTH OF WIRE TAPER AT SPRING ENDS	
MINIMUM (SELECT ONE)	
(INCHES)	1702
(MILLIMETERS)	1704
MAXIMUM (SELECT ONE)	
(INCHES)	1706
(MILLIMETERS)	1708
TAPERED END DIAMETER	
MINIMUM (SELECT ONE)	
(INCHES)	1710
(MILLIMETERS)	1712
MAXIMUM (SELECT ONE)	
(INCHES)	1714
(MILLIMETERS)	1716

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

DESIGN AND CONSTRUCTION.

WIRE TAPER.

1702 THE LENGTH OF THE WIRE TAPER AT THE SPRING ENDS SHALL BE NOT LESS THAN 1702 INCH(S).

1704 THE LENGTH OF THE WIRE TAPER AT THE SPRING ENDS SHALL BE NOT LESS THAN 1704 MILLIMETERS.

1706 THE LENGTH OF THE WIRE TAPER AT THE SPRING ENDS SHALL BE NOT GREATER THAN 1706 INCH(S).

1708 THE LENGTH OF THE WIRE TAPER AT THE SPRING ENDS SHALL BE NOT GREATER THAN 1708 MILLIMETERS.

TAPERED END DIAMETER.

1710 THE TAPERED END DIAMETER SHALL BE NOT LESS THAN 1710 INCH(S).

1712 THE TAPERED END DIAMETER SHALL BE NOT LESS THAN 1712 MILLIMETERS.

1714 THE TAPERED END DIAMETER SHALL BE NOT GREATER THAN 1714 INCH(S).

1716 THE TAPERED END DIAMETER SHALL BE NOT GREATER THAN 1716 MILLIMETERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
END SQUARENESS	
SPRING END SQUARENESS WITH SPRING AXIS, PLUS OR MINUS (DEGREES)	1613
BEARING SURFACE	
*SPRING END 1 MINIMUM BEARING SURFACE (DEGREES)	1730
*SPRING END 2 MINIMUM BEARING SURFACE (DEGREES)	1732
GROUND ENDS	
BEARING ENDS FLATTENED BY GRINDING (SELECT ONE)	
SIDE OPPOSITE COIL.	1735
BOTH SIDES.	1740
MINIMUM THICKNESS AT TIP AFTER GRINDING (SELECT ONE)	
(INCH)	1742
(MILLIMETERS)	1744

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1613 END SQUARENESS. THE SPRING END SQUARENESS DEVIATION FROM THE PERFENDICULAR AXIS SHALL BE NOT GREATER THAN 1613 PLUS OR MINUS DEGREES.

BEARING SURFACE.

1730 THE SPRING END NUMBER 1 BEARING SURFACE SHALL BE NOT LESS THAN 1730 DEGREES.

1732 THE SPRING END NUMBER 2 BEARING SURFACE SHALL BE NOT LESS THAN 1732 DEGREES.

GROUND ENDS.

1735 THE BEARING ENDS OF THE SPRING SHALL BE FLATTENED BY GRINDING THE SIDE OPPOSITE THE COIL.

1740 THE BEARING ENDS OF THE SPRING SHALL BE FLATTENED BY GRINDING BOTH SIDES OF THE SPRING.

1742 THE MINIMUM THICKNESS AT THE TIP OF THE COIL AFTER GRINDING SHALL BE 1742 INCH.

1744 THE MINIMUM THICKNESS AT THE TIP OF THE COIL AFTER GRINDING SHALL BE 1744 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
STOCK SHAPE (SELECT ONE)	
ROUND.	1920
SQUARE.	1930
FLAT.	1922
OTHER ____.	1924
MANDREL DIAMETER (SELECT ONE)	
(INCHES)	1926
(MILLIMETERS)	1928
PITCH (SELECT ONE)	
COILS PER INCH (QUANTITY)	1934
COILS PER MILLIMETER (QUANTITY)	1936
END ORIENTATION	
SPRING END POSITION RELATIVE TO AXIS	
END 1 MINIMUM (DEGREES)	1746
END 2 MINIMUM (DEGREES)	1748

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1920	STOCK SHAPE. THE SPRING STOCK SHAPE SHALL BE ROUND.
1930	STOCK SHAPE. THE SPRING STOCK SHAPE SHALL BE SQUARE.
1922	STOCK SHAPE. THE SPRING STOCK SHAPE SHALL BE FLAT.
1924	STOCK SHAPE. THE SPRING STOCK SHAPE SHALL BE 1924.
1926	MANDREL DIAMETER. THE SPRING MANDREL DIAMETER SHALL BE 1926 INCH(S).
1928	MANDREL DIAMETER. THE SPRING MANDREL DIAMETER SHALL BE 1928 MILLIMETERS.
1934	PITCH. THE PITCH OF THE SPRING SHALL BE 1934 COILS PER INCH.
1936	PITCH. THE PITCH OF THE SPRING SHALL BE 1936 COILS PER MILLIMETER.
	END ORIENTATION.
1746	THE POSITION OF SPRING END NUMBER 1 RELATIVE TO THE SPRING AXIS SHALL BE NOT LESS THAN 1746 DEGREES.
1748	THE POSITION OF SPRING END NUMBER 2 RELATIVE TO THE SPRING AXIS SHALL BE NOT LESS THAN 1748 DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
CONCENTRICITY	
MAXIMUM DEVIATION (SELECT ONE)	
(INCH)	1752
(MILLIMETERS)	1754
NUMBER OF FREE COILS	
MINIMUM (QUANTITY)	1756
MAXIMUM (QUANTITY)	1758
DIRECTION OF HELIX (SELECT ONE)	
RIGHT HAND.	1661
LEFT HAND.	1663
STRANDED WIRE	
NUMBER OF STRANDS (QUANTITY)	1766
STRAND DIAMETER (SELECT ONE)	
(INCH)	1768
(MILLIMETERS)	1780

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1752 CONCENTRICITY. THE DEVIATION FROM CONCENTRICITY OF COILS WITH THE SPRING CENTER SHALL BE NOT GREATER THAN 1752 INCH.

1754 CONCENTRICITY. THE DEVIATION FROM CONCENTRICITY OF COILS WITH THE SPRING CENTER SHALL BE NOT GREATER THAN 1754 MILLIMETERS.

NUMBER OF FREE COILS.

1756 THE NUMBER OF FREE COILS SHALL BE NOT LESS THAN 1756.

1758 THE NUMBER OF FREE COILS SHALL BE NOT GREATER THAN 1758.

1661 DIRECTION OF HELIX. THE DIRECTION OF THE SPRING HELIX SHALL BE RIGHT HAND.

1663 DIRECTION OF HELIX. THE DIRECTION OF THE SPRING HELIX SHALL BE LEFT HAND.

STRANDED WIRE.

1766 THE NUMBER OF STRANDS SHALL BE 1766.

1768 THE DIAMETER OF THE WIRE STRANDS SHALL BE 1768 INCH.

1780 THE DIAMETER OF THE WIRE STRANDS SHALL BE 1780 MILLIMETERS.

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
DIRECTION OF STRAND HELIX (SELECT ONE)	
RIGHT HAND.	1782
LEFT HAND.	1784
OPTIONAL.	1786
PITCH OF STRAND HELIX	
MINIMUM (SELECT ONE)	
(INCHES)	1788
(MILLIMETERS)	1790
MAXIMUM (SELECT ONE)	
(INCHES)	1792
(MILLIMETERS)	1794
WIRE END CLOSURE (SELECT ONE)	
BRAZED.	1796
FUZED.	1797
ROUNDED.	1798

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1782	DIRECTION OF STRAND HELIX. THE DIRECTION OF THE STRAND HELIX SHALL BE RIGHT HAND.
1784	DIRECTION OF STRAND HELIX. THE DIRECTION OF THE STRAND HELIX SHALL BE LEFT HAND.
1786	DIRECTION OF STRAND HELIX. THE DIRECTION OF THE STRAND HELIX SHALL BE OPTIONAL.
	PITCH OF STRAND HELIX.
1788	THE PITCH OF THE STRAND HELIX SHALL BE NOT LESS THAN 1788 INCH.
1790	THE PITCH OF THE STRAND HELIX SHALL BE NOT LESS THAN 1790 MILLIMETER.
1792	THE PITCH OF THE STRAND HELIX SHALL BE NOT GREATER THAN 1792 INCH.
1794	THE PITCH OF THE STRAND HELIX SHALL BE NOT GREATER THAN 1794 MILLIMETER.
1796	WIRE END CLOSURE. THE STRANDED WIRE END CLOSURE SHALL BE BRAZED.
1797	WIRE END CLOSURE. THE STRANDED WIRE END CLOSURE SHALL BE FUZED.
1798	WIRE END CLOSURE. THE STRANDED WIRE END CLOSURE SHALL BE ROUNDED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
SOLID DIAMETER	
SOLID DIAMETER SHALL BE AS FOLLOWS:	1760
MINIMUM (SELECT ONE)	
(INCHES)	1800
(MILLIMETERS)	1802
MAXIMUM (SELECT ONE)	
(INCHES)	1804
(MILLIMETERS)	1806
SHAFT DIAMETER	
MAXIMUM SHAFT DIAMETER (SELECT ONE)	
(INCHES)	1808
(MILLIMETERS)	1810

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1760	SOLID DIAMETER. THE SPRING SOLID DIAMETER SHALL BE AS FOLLOWS:
1800	THE SPRING SOLID DIAMETER SHALL BE NOT LESS THAN 1800 INCH(S).
1802	THE SPRING SOLID DIAMETER SHALL BE NOT LESS THAN 1802 MILLIMETERS.
1804	THE SPRING SOLID DIAMETER SHALL BE NOT GREATER THAN 1804 INCH(S).
1806	THE SPRING SOLID DIAMETER SHALL BE NOT GREATER THAN 1806 MILLIMETERS.
1808	SHAFT DIAMETER. THE DIAMETER OF THE SHAFT OVER WHICH THE SPRING OPERATES FREELY SHALL BE NOT GREATER THAN 1808 INCH(S).
1810	SHAFT DIAMETER. THE DIAMETER OF THE SHAFT OVER WHICH THE SPRING OPERATES FREELY SHALL BE NOT GREATER THAN 1810 MILLIMETERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
BORE DIAMETER	
MINIMUM (SELECT ONE)	
(INCHES)	1812
(MILLIMETERS)	1814
INITIAL OPERATING POSITION	
DEFLECTION FROM FREE TO INITIAL OPERATING POSITION SHALL BE AS FOLLOWS:	1762
MINIMUM (SELECT ONE)	
(INCHES)	1816
(MILLIMETERS)	1818
(DEGREES)	1820
MAXIMUM (SELECT ONE)	
(INCHES)	1822
(MILLIMETERS)	1824
(DEGREES)	1826

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1812 BORE DIAMETER. THE DIAMETER OF THE BORE IN WHICH THE SPRING SHALL OPERATE FREELY SHALL BE NOT LESS THAN 1812 INCH(S).

1814 BORE DIAMETER. THE DIAMETER OF THE BORE IN WHICH THE SPRING SHALL OPERATE FREELY SHALL BE NOT LESS THAN 1814 MILLIMETERS.

1762 INITIAL OPERATING POSITION. DEFLECTION FROM FREE TO INITIAL OPERATING POSITION SHALL BE AS FOLLOWS:

1816 DEFLECTION SHALL BE NOT LESS THAN 1816 INCH(S).

1818 DEFLECTION SHALL BE NOT LESS THAN 1818 MILLIMETERS.

1820 DEFLECTION SHALL BE NOT LESS THAN 1820 DEGREES.

1822 DEFLECTION SHALL BE NOT GREATER THAN 1822 INCH(S).

1824 DEFLECTION SHALL BE NOT GREATER THAN 1824 MILLIMETERS.

1826 DEFLECTION SHALL BE NOT GREATER THAN 1826 DEGREES.

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
FINAL OPERATING POSITION	
AS FOLLOWS:	1828
MINIMUM (SELECT ONE)	
(INCHES)	1830
(MILLIMETERS)	1832
(DEGREES)	1834
MAXIMUM (SELECT ONE)	
(INCHES)	1836
(MILLIMETERS)	1838
(DEGREES)	1839
SURFACE ROUGHNESS	
MAXIMUM (SELECT ONE)	
(MICROINCHES)	1840
(MICROMETERS)	1850
SURFACE WAVINESS	
MAXIMUM (SELECT ONE)	
(INCHES)	1842
(MILLIMETERS)	1844

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1828	FINAL OPERATING POSITION. DEFLECTION FROM FREE TO FINAL OPERATING POSITION SHALL BE AS FOLLOWS:
1830	DEFLECTION SHALL BE NOT LESS THAN 1830 INCH(S).
1832	DEFLECTION SHALL BE NOT LESS THAN 1832 MILLIMETERS.
1834	DEFLECTION SHALL BE NOT LESS THAN 1834 DEGREES.
1836	DEFLECTION SHALL BE NOT GREATER THAN 1836 INCH(S).
1838	DEFLECTION SHALL BE NOT GREATER THAN 1838 MILLIMETERS.
1839	DEFLECTION SHALL BE NOT GREATER THAN 1839 DEGREES.
1840	SURFACE ROUGHNESS. SURFACE ROUGHNESS SHALL BE NOT GREATER THAN 1840 MICROINCHES.
1850	SURFACE ROUGHNESS. SURFACE ROUGHNESS SHALL BE NOT GREATER THAN 1850 MICROMETERS.
1842	SURFACE WAVINESS. SURFACE WAVINESS SHALL BE NOT GREATER THAN 1842 INCH(S).
1844	SURFACE WAVINESS. SURFACE WAVINESS SHALL BE NOT GREATER THAN 1844 MILLIMETERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
SPRING BEARING SURFACE ROUGHNESS HEIGHT	
MAXIMUM (SELECT ONE)	
(MICROINCHES)	1864
(MICROMETERS)	1866
SPRING BEARING SURFACE WAVINESS	
MAXIMUM (SELECT ONE)	
(INCH)	1868
(MILLIMETERS)	1870
FATIGUE LIFE	
MINIMUM (CYCLES)	1872
BAND LENGTH (SELECT ONE)	
(INCHES)	1874
(MILLIMETERS)	1876
DRUM DIAMETER (SELECT ONE)	
(INCHES)	1878
(MILLIMETERS)	1880

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1864	SPRING BEARING SURFACE ROUGHNESS. THE ARITHMETICAL AVERAGE ROUGHNESS HEIGHT OF THE SPRING BEARING SURFACES SHALL BE NOT GREATER THAN 1864 MICROINCHES.
1866	SPRING BEARING SURFACE ROUGHNESS. THE ARITHMETICAL AVERAGE ROUGHNESS HEIGHT OF THE SPRING BEARING SURFACES SHALL BE NOT GREATER THAN 1866 MICROMETERS.
1868	SPRING BEARING SURFACE WAVINESS. THE SPRING BEARING SURFACE WAVINESS SHALL BE NOT GREATER THAN 1868 INCH.
1870	SPRING BEARING SURFACE WAVINESS. THE SPRING BEARING SURFACE WAVINESS SHALL BE NOT GREATER THAN 1870 MILLIMETERS.
1872	FATIGUE LIFE. THE FATIGUE LIFE OF THE SPRING SHALL BE NOT LESS THAN 1872 CYCLES.
1874	BAND LENGTH. THE BAND LENGTH OF THE SPRING SHALL BE 1874 INCHES.
1876	BAND LENGTH. THE BAND LENGTH OF THE SPRING SHALL BE 1876 MILLIMETERS.
1878	DRUM DIAMETER. THE DRUM DIAMETER OVER WHICH THE SPRING SHALL OPERATE SHALL BE 1878 INCH(S).
1880	DRUM DIAMETER. THE DRUM DIAMETER OVER WHICH THE SPRING SHALL OPERATE SHALL BE 1880 MILLIMETERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
SPRING RATE	
AS FOLLOWS:	1862
MINIMUM (SELECT ONE)	
(POUNDS PER INCH)	1882
(GRAMS PER METER)	1884
MAXIMUM (SELECT ONE)	
(POUNDS PER INCH)	1886
(NEWTON METERS)	1888
HEAT TREATMENT	
AS FOLLOWS:	1890
PER MIL-H-6875.	1892
PER MIL-H-7199.	1894
PER MIL-H-81200.	1896
OTHER ____.	1898

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1862	SPRING RATE. THE SPRING RATE SHALL BE AS FOLLOWS:
1882	THE SPRING RATE SHALL BE NOT LESS THAN 1882 POUNDS PER INCH.
1884	THE SPRING RATE SHALL BE NOT LESS THAN 1884 GRAMS PER METER.
1886	THE SPRING RATE SHALL BE NOT GREATER THAN 1886 POUNDS PER INCH.
1888	THE SPRING RATE SHALL BE NOT GREATER THAN 1888 NEWTON METERS.
1890	HEAT TREATMENT. HEAT TREATMENT OF THE SPRING SHALL BE AS FOLLOWS:
1892	HEAT TREATMENT SHALL BE PERFORMED IN ACCORDANCE WITH MIL-H-6875.
1894	HEAT TREATMENT SHALL BE PERFORMED IN ACCORDANCE WITH MIL-H-7199.
1896	HEAT TREATMENT SHALL BE PERFORMED IN ACCORDANCE WITH MIL-H-81200.
1898	HEAT TREATMENT SHALL BE PERFORMED IN ACCORDANCE WITH 1898.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
CLEANLINESS	
AS FOLLOWS: (SELECT ONE)	1932
PER MIL-STD-186.	1906
PER MIL-P-116.	1908
PER MIL-STD-1246.	1910
OTHER ____.	1912
TENSILE STRENGTH, FINISHED SPRING	
MINIMUM (SELECT ONE)	
(KSI)	1914
(MPA)	1916
WEIGHT	
MINIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	6943
(POUNDS)	6944

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1932 CLEANLINESS. CLEANLINESS OF THE SPRING SHALL BE AS FOLLOWS:

1906 CLEANLINESS SHALL BE IN ACCORDANCE WITH MIL-STD-186.

1908 CLEANLINESS SHALL BE IN ACCORDANCE WITH MIL-P-116.

1910 CLEANLINESS SHALL BE IN ACCORDANCE WITH MIL-STD-1246.

1912 CLEANLINESS SHALL BE IN ACCORDANCE WITH 1912.

TENSILE STRENGTH, FINISHED SPRING.

1914 TENSILE STRENGTH OF THE SPRING SHALL BE NOT LESS THAN 1914 THOUSAND POUNDS PER SQUARE INCH.

1916 TENSILE STRENGTH OF THE SPRING SHALL BE NOT LESS THAN 1916 MEGAPASCALS.

WEIGHT.

6943 MINIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT LESS THAN 6943 OUNCE(S).

6944 MINIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT LESS THAN 6944 POUND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
MINIMUM WEIGHT PER UNIT (CONT)	
SI (SELECT ONE)	
(GRAMS)	6945
(KILOGRAMS)	6946
MINIMUM WEIGHT PER 100 (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7031
(POUNDS)	7032
SI (SELECT ONE)	
(GRAMS)	7033
(KILOGRAMS)	7034
BENDING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2121
NO CRACKS OR FRACTURES.	2125

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6945	MINIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT LESS THAN 6945 GRAM(S).
6946	MINIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT LESS THAN 6946 KILOGRAM(S).
7031	MINIMUM WEIGHT PER 100. THE WEIGHT PER 100 UNITS SHALL BE NOT LESS THAN 7031 OUNCE(S).
7032	MINIMUM WEIGHT PER 100. THE WEIGHT PER 100 UNITS SHALL BE NOT LESS THAN 7032 POUND(S).
7033	MINIMUM WEIGHT PER 100. THE WEIGHT PER 100 UNITS SHALL BE NOT LESS THAN 7033 GRAM(S).
7034	MINIMUM WEIGHT PER 100. THE WEIGHT PER 100 UNITS SHALL BE NOT LESS THAN 7034 KILOGRAM(S).
2121	BENDING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2121.
2125	BENDING. THERE SHALL BE NO CRACKS OR FRACTURES AS A RESULT OF THE BEND TEST.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
BENDING (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2141
PER DOCUMENT (DOC DES)	2143
AS FOLLOWS:	2145
BEND ANGLE OF FINISHED SPRING WIRE (DEGREES)	2147
ROD DIAMETER (SELECT ONE)	
(INCHES)	2149
(MILLIMETERS)	2151
DECARBURIZATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2221
AS FOLLOWS:	2223
NO DECARBURIZATION	2225
MAXIMUM TOTAL DECARBURIZATION (SELECT ONE)	
(INCH)	2227
(MILLIMETERS)	2229

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2141	BENDING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2141.
2143	BENDING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2143.
2145	BENDING. THE BEND TEST SHALL BE PERFORMED AS FOLLOWS:
2147	THE BEND ANGLE OF THE FINISHED SPRING WIRE AROUND THE TEST ROD SHALL BE 2147 DEGREES.
2149	THE DIAMETER OF THE ROD USED FOR THE BEND TEST SHALL BE 2149 INCH(S).
2151	THE DIAMETER OF THE ROD USED FOR THE BEND TEST SHALL BE 2151 MILLIMETERS.
2221	DECARBURIZATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2221.
2223	DECARBURIZATION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2225	THERE SHALL BE NO DECARBURIZATION DUE TO THE PLATING PROCESS.
2227	THE MAXIMUM TOTAL DECARBURIZATION SHALL BE 2227 INCH.
2229	THE MAXIMUM TOTAL DECARBURIZATION SHALL BE 2229 MILLIMETERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DECARBURIZATION (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM PARTIAL DECARBURIZATION (SELECT ONE)	
(INCH)	2231
(MILLIMETERS)	2233
SECTIONAL THICKNESS (PERCENT)	2235
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2290
PER DOCUMENT (DOC DES)	2237
DEFLECTION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2311
AS FOLLOWS:	2323
MAXIMUM DEFLECTION FROM FREE POSITION WITHOUT PERMANENT SET (SELECT ONE)	
(INCHES)	2325
(MILLIMETERS)	2327

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2231	THE MAXIMUM PARTIAL DECARBURIZATION SHALL BE 2231 INCH.
2233	THE MAXIMUM PARTIAL DECARBURIZATION SHALL BE 2233 MILLIMETERS.
2235	DECARBURIZATION SHALL NOT EXCEED 2235 PERCENT OF THE SECTIONAL THICKNESS.
2290	DECARBURIZATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2290.
2237	DECARBURIZATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2237.
2311	DEFLECTION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2311.
2323	DEFLECTION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2325	THE DEFLECTION FROM THE FREE POSITION WITHOUT PERMANENT SET SHALL BE NOT GREATER THAN 2325 INCH(S).
2327	THE DEFLECTION FROM THE FREE POSITION WITHOUT PERMANENT SET SHALL BE NOT GREATER THAN 2327 MILLIMETERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DEFLECTION (CONT)	
MAXIMUM DEFLECTION FROM FREE POSITION WITHOUT PERMANENT SET (CONT)	
(DEGREES)	2329
MAXIMUM DEFLECTION FROM FREE POSITION TO SOLID HEIGHT (SELECT ONE)	
(INCHES)	2331
(MILLIMETERS)	2333
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2341
PER DOCUMENT (DOC DES)	2343
EMBRITTLEMENT RELIEF	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2421
AS FOLLOWS:	2423
NO EMBRITTLEMENT FROM PLATING PROCESS.	2425
EMBRITTLEMENT SHALL BE MINIMIZED.	2427
EMBRITTLEMENT RELIEF TREATMENT PER PLATING OR COATING SPECIFICATION.	2429

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2329	THE DEFLECTION FROM THE FREE POSITION WITHOUT PERMANENT SET SHALL BE NOT GREATER THAN 2329 DEGREES.
2331	THE DEFLECTION FROM THE FREE POSITION TO SOLID HEIGHT SHALL BE NOT GREATER THAN 2329 INCH(S).
2333	THE DEFLECTION FROM THE FREE POSITION TO SOLID HEIGHT SHALL BE NOT GREATER THAN 2333 MILLIMETERS.
2341	DEFLECTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2341.
2343	DEFLECTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2343.
2421	EMBRITTLEMENT RELIEF. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2421.
2423	EMBRITTLEMENT RELIEF. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2425	NO EMBRITTLEMENT FROM PLATING PROCESS.
2427	EMBRITTLEMENT SHALL BE MINIMIZED.
2429	EMBRITTLEMENT RELIEF TREATMENT SHALL BE PERFORMED IN ACCORDANCE WITH THE PLATING OR COATING SPECIFICATION.

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
EMBRITTLEMENT RELIEF (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2441
PER DOCUMENT (DOC DES)	2443
AS FOLLOWS:	2445
BAKE TIME (HOURS)	2447
TOLERANCE (MINUTES)	2449
TEMPERATURE (DEGREES CELSIUS)	2451
TOLERANCE (DEGREES CELSIUS)	2453
TIME PERMITTED BETWEEN PLATING AND BAKING (MINUTES)	2455
FATIGUE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2521
AS FOLLOWS:	2523
NO CRACKS OR BREAKS.	2525
MAXIMUM PERMANENT SET (SELECT ONE)	
(INCHES)	2527
(MILLIMETERS)	2529
MAXIMUM PERMANENT SET (DEGREES)	2531

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2441	EMBRITTLEMENT RELIEF. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2441.
2443	EMBRITTLEMENT RELIEF. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2443.
2445	EMBRITTLEMENT RELIEF. TESTING SHALL BE AS FOLLOWS:
2447	BAKE TIME SHALL BE 2447 HOURS.
2449	TIME TOLERANCE SHALL BE 2449 MINUTES.
2451	BAKE TEMPERATURE SHALL BE 2451 DEGREES CELSIUS.
2453	TEMPERATURE TOLERANCE SHALL BE 2453 DEGREES CELSIUS.
2455	THE TIME BETWEEN PLATING AND BAKING SHALL BE 2455 MINUTES.
2521	FATIGUE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2521.
2523	FATIGUE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2525	THERE SHALL BE NO CRACKS OR BREAKS INDICATING FATIGUE.
2527	PERMANENT SET SHALL BE NOT GREATER THAN 2527 INCH(S).
2529	PERMANENT SET SHALL BE NOT GREATER THAN 2529 MILLIMETERS.
2531	PERMANENT SET SHALL BE NOT GREATER THAN 2531 DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FATIGUE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2541
AS FOLLOWS:	2543
ALTERNATE DEFLECTION FROM INITIAL TO FINAL OPERATING POSITION (CYCLES)	2545
TEST TEMPERATURE (DEGREES CELSIUS)	2547
INSPECTION INTERVALS (CYCLES INTERVALS)	2549
INSPECTION METHOD (SELECT ONE)	
VISUAL.	2551
PER MIL-STD-271.	2553
FREE LENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3621
AS FOLLOWS:	3623
LENGTH AFTER APPLICATION AND RELEASE OF MAXIMUM WORKING LOAD (SELECT ONE)	
(INCHES)	3625
(MILLIMETERS)	3227

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2541	FATIGUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2541.
2543	FATIGUE. TESTING SHALL BE PERFORMED AS FOLLOWS:
2545	DEFLECTIONS FROM INITIAL TO FINAL OPERATING POSITION SHALL BE 2545 CYCLES.
2547	THE TEST TEMPERATURE SHALL BE 2547 DEGREES.
2549	INSPECTION SHALL BE PERFORMED AT 2549 CYCLE INTERVALS.
2551	THE INSPECTION METHOD SHALL BE VISUAL.
2553	THE INSPECTION METHOD SHALL BE IN ACCORDANCE WITH MIL-STD-271.
3621	FREE LENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3621.
3623	FREE LENGTH. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3625	THE SPRING FREE LENGTH SHALL BE 3625 INCH(S).
3227	THE SPRING FREE LENGTH SHALL BE 3627 MILLIMETERS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FREE LENGTH (CONT)	
REQUIREMENTS (CONT)	
NUMBER OF LOADINGS BEFORE MEASUREMENT (QUANTITY)	3629
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3641
PER MIL-S-6715.	3645
AS FOLLOWS:	3643
MAXIMUM WORKING LOAD ____.	3649
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4798
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	4799
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4788

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3629	THE QUANTITY OF LOADINGS BEFORE MEASUREMENT SHALL BE 3629.
3641	FREE LENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3641.
3645	FREE LENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-6715.
3643	FREE LENGTH. TESTING SHALL BE AS FOLLOWS:
3649	THE WORKING LOAD SHALL BE NOT GREATER THAN 3649.
4798	HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.
4799	HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
4788	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-810, METHOD 507.	4871
*PROCEDURE NUMBER (SELECT ONE)	
TEST PROCEDURE I.	4767
EXTREME TEMPERATURE BEFORE TESTING (DEGREES CELSIUS)	4777
*DURATION OF TEMPERATURE EXPOSURE (HOURS)	4778
TEST PROCEDURE II.	6334
CYCLE LIMITED TO 24 HOURS DURATION.	4716
TEST PROCEDURE III.	6335
TEST PROCEDURE IV.	6336
TEST PROCEDURE V.	6337
NUMBER OF CYCLES (NUMBER)	4800
WATER PURITY BY CONDUCTIVITY METHOD.	4764

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4871	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 507 OF MIL-STD-810.
4767	PROCEDURE NUMBER I SHALL APPLY.
4777	SPECIMEN(S) SHALL BE EXPOSED TO 4777 DEGREES CELSIUS BEFORE TESTING.
4778	DURATION OF EXPOSURE TO EXTREME TEMPERATURE SHALL BE 4778 HOUR(S).
6334	PROCEDURE NUMBER II SHALL APPLY.
4716	CYCLES SHALL BE LIMITED TO 24 HOURS DURATION.
6335	PROCEDURE NUMBER III SHALL APPLY.
6336	PROCEDURE NUMBER IV SHALL APPLY.
6337	PROCEDURE NUMBER V SHALL APPLY.
4800	THERE SHALL BE 4800 CYCLE(S).
4764	WATER PURITY SHALL BE DETERMINED BY THE CONDUCTIVITY METHOD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
PER MIL-STD-810, METHOD 507. (CONT)	
OPERATION AND MEASUREMENT AT HIGH TEMPERATURE PORTION OF CYCLE(S) (NUMBER)	4916
OPERATION AND MEASUREMENT AT LOW TEMPERATURE PORTION OF CYCLE(S) (NUMBER)	1554
INITIAL TENSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2621
NO PERMANENT SET	2623
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2641
PER MIL-S-13572	2643

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4916	OPERATION AND MEASUREMENTS SHALL BE PERFORMED AT HIGH TEMPERATURE DURING CYCLE(S) 4916.
1554	OPERATION AND MEASUREMENTS SHALL BE PERFORMED AT LOW TEMPERATURE DURING CYCLE(S) 1554.
2621	INITIAL TENSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2621.
2623	INITIAL TENSION. THERE SHALL BE NO PERMANENT SET CAUSED BY INITIAL TENSION TESTS.
2641	INITIAL TENSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2641.
2643	INITIAL TENSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-13572.

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INITIAL TENSION (CONT)	
TEST METHODS (CONT)	
AS FOLLOWS:	2645
MINIMUM INITIAL TENSION (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	2647
(POUNDS)	2649
SI (SELECT ONE)	
(GRAMS)	2651
(KILOGRAMS)	2653
MAXIMUM INITIAL TENSION (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	2655
(POUNDS)	2657
SI (SELECT ONE)	
(GRAMS)	2659
(KILOGRAMS)	2661

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2645	INITIAL TENSION. TESTING SHALL BE PERFORMED AS FOLLOWS:
2647	THE INITIAL TENSION SHALL BE NOT LESS THAN 2647 OUNCES.
2649	THE INITIAL TENSION SHALL BE NOT LESS THAN 2649 POUNDS.
2651	THE INITIAL TENSION SHALL BE NOT LESS THAN 2651 GRAMS.
2653	THE INITIAL TENSION SHALL BE NOT LESS THAN 2653 KILOGRAMS.
2655	THE INITIAL TENSION SHALL BE NOT GREATER THAN 2655 OUNCES.
2657	THE INITIAL TENSION SHALL BE NOT GREATER THAN 2657 POUNDS.
2659	THE INITIAL TENSION SHALL BE NOT GREATER THAN 2659 GRAMS.
2661	THE INITIAL TENSION SHALL BE NOT GREATER THAN 2661 KILOGRAMS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LOAD	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2721
AS FOLLOWS:	2723
REMAIN WITHIN SPECIFIED TOLERANCE.	2725
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2741
AS FOLLOWS:	2745
MINIMUM LOAD (SELECT ONE)	
U.S. (SELECT ONE)	
(POUND-INCHES)	2747
(OUNCES)	2749
(POUNDS)	1833
SI (SELECT ONE)	
(NEWTON METERS)	2751
(GRAMS)	2753
(NEWTONS)	2755

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2721	LOAD. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2721.
2723	LOAD. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2725	THE SPRING SHALL REMAIN WITHIN SPECIFIED TOLERANCE AFTER TESTING.
2741	LOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2741.
2745	LOAD. TESTING SHALL BE PERFORMED AS FOLLOWS:
2747	THE SPRING LOAD SHALL BE NOT LESS THAN 2747 POUND-INCHES.
2749	THE SPRING LOAD SHALL BE NOT LESS THAN 2749 OUNCES.
1833	THE SPRING LOAD SHALL BE NOT LESS THAN 1833 POUNDS.
2751	THE SPRING LOAD SHALL BE NOT LESS THAN 2751 NEWTON METERS.
2753	THE SPRING LOAD SHALL BE NOT LESS THAN 2753 GRAMS.
2755	THE SPRING LOAD SHALL BE NOT LESS THAN 2755 NEWTONS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LOAD (CONT)	
AS FOLLOWS (CONT)	
MAXIMUM LOAD (SELECT ONE)	
U.S. (SELECT ONE)	
(POUND-INCHES)	2757
(OUNCES)	2759
(POUNDS)	1835
SI (SELECT ONE)	
(NEWTON METERS)	2761
(GRAMS)	2763
(NEWTONS)	2765
MAXIMUM DEFLECTION (SELECT ONE)	
(INCHES)	1831
(MILLIMETERS)	2767
(DEGREES)	2769
LOAD, FINAL OPERATING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2821

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2757	THE SPRING LOAD SHALL BE NOT GREATER THAN 2757 POUND-INCHES.
2759	THE SPRING LOAD SHALL BE NOT GREATER THAN 2759 OUNCES.
1835	THE SPRING LOAD SHALL BE NOT GREATER THAN 1835 POUNDS.
2761	THE SPRING LOAD SHALL BE NOT GREATER THAN 2761 NEWTON METERS.
2763	THE SPRING LOAD SHALL BE NOT GREATER THAN 2763 GRAMS.
2765	THE SPRING LOAD SHALL BE NOT GREATER THAN 2765 NEWTONS.
1831	THE SPRING DEFLECTION SHALL BE NOT GREATER THAN 1831 INCH(S).
2767	THE SPRING DEFLECTION SHALL BE NOT GREATER THAN 2767 MILLIMETERS.
2769	THE SPRING DEFLECTION SHALL BE NOT GREATER THAN 2769 DEGREES.
2821	LOAD, FINAL OPERATING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2821.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LOAD, FINAL OPERATING (CONT)	
REQUIREMENTS (CONT)	
REMAIN WITHIN SPECIFIED TOLERANCE.	2823
TEST METHOD (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2841
AS FOLLOWS:	2843
DEFLECTION TO FINAL OPERATING POSITION (SELECT ONE)	
(INCHES)	2845
(MILLIMETERS)	2847
(DEGREES)	2849
MINIMUM LOAD (SELECT ONE)	
U.S. (SELECT ONE)	
(POUND-INCHES)	2851
(OUNCES)	2853
(POUNDS)	2855

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2823	LOAD, FINAL OPERATING. THE FINAL OPERATING LOAD SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
2841	LOAD, FINAL OPERATING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2841.
2843	LOAD, FINAL OPERATING. TESTING SHALL BE PERFORMED AS FOLLOWS:
2845	THE DEFLECTION OF THE SPRING TO FINAL OPERATING POSITION SHALL BE 2845 INCH(S).
2847	THE DEFLECTION OF THE SPRING TO FINAL OPERATING POSITION SHALL BE 2847 MILLIMETERS.
2849	THE DEFLECTION OF THE SPRING TO FINAL OPERATING POSITION SHALL BE 2849 DEGREES.
2851	THE SPRING LOAD SHALL BE NOT LESS THAN 2851 POUND-INCHES.
2853	THE SPRING LOAD SHALL BE NOT LESS THAN 2853 OUNCES.
2855	THE SPRING LOAD SHALL BE NOT LESS THAN 2855 POUNDS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LOAD, FINAL OPERATING (CONT)	
MINIMUM LOAD (CONT)	
SI (SELECT ONE)	
(NEWTON METERS)	2857
(GRAMS)	2859
(KILOGRAMS)	2861
MAXIMUM LOAD (SELECT ONE)	
U.S. (SELECT ONE)	
(POUND-INCHES)	2863
(OUNCES)	2865
(POUNDS)	2867
SI (SELECT ONE)	
(NEWTON METERS)	2869
(GRAMS)	2871
(NEWTONS)	2873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2857	THE SPRING LOAD SHALL BE NOT LESS THAN 2857 NEWTON METERS.
2859	THE SPRING LOAD SHALL BE NOT LESS THAN 2859 GRAMS.
2861	THE SPRING LOAD SHALL BE NOT LESS THAN 2861 NEWTONS.
2863	THE SPRING LOAD SHALL BE NOT GREATER THAN 2863 POUND-INCHES.
2865	THE SPRING LOAD SHALL BE NOT GREATER THAN 2865 OUNCES.
2867	THE SPRING LOAD SHALL BE NOT GREATER THAN 2867 POUNDS.
2869	THE SPRING LOAD SHALL BE NOT GREATER THAN 2869 NEWTON METERS.
2871	THE SPRING LOAD SHALL BE NOT GREATER THAN 2871 GRAMS.
2873	THE SPRING LOAD SHALL BE NOT GREATER THAN 2873 NEWTONS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LOAD, INITIAL OPERATING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2921
REMAIN WITHIN SPECIFIED TOLERANCES.	2923
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2941
AS FOLLOWS:	2943
DEFLECTION TO INITIAL OPERATING POSITION (SELECT ONE)	
(INCHES)	2945
(MILLIMETERS)	2947
(DEGREES)	2949
MINIMUM LOAD (SELECT ONE)	
U.S. (SELECT ONE)	
(POUND-INCHES)	2951
(OUNCES)	2953
(POUNDS)	2955

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2921	LOAD, INITIAL OPERATING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2921.
2923	LOAD, INITIAL OPERATING. THE INITIAL OPERATING LOAD SHALL REMAIN WITHIN SPECIFIED TOLERANCES.
2941	LOAD, INITIAL OPERATING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2941.
2943	LOAD, INITIAL OPERATING. TESTING SHALL BE PERFORMED AS FOLLOWS:
2945	THE DEFLECTION OF THE SPRING TO THE INITIAL OPERATION POSITION SHALL BE 2945 INCH(S).
2947	THE DEFLECTION OF THE SPRING TO THE INITIAL OPERATION POSITION SHALL BE 2947 MILLIMETERS.
2949	THE DEFLECTION OF THE SPRING TO THE INITIAL OPERATION POSITION SHALL BE 2949 DEGREES.
2951	THE SPRING LOAD SHALL BE NOT LESS THAN 2951 POUND-INCHES.
2953	THE SPRING LOAD SHALL BE NOT LESS THAN 2953 OUNCES.
2955	THE SPRING LOAD SHALL BE NOT LESS THAN 2955 POUNDS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LOAD, INITIAL OPERATING (CONT)	
MINIMUM LOAD (CONT)	
SI (SELECT ONE)	
(NEWTON METERS)	2957
(GRAMS)	2959
(NEWTONS)	2961
MAXIMUM LOAD (SELECT ONE)	
U.S. (SELECT ONE)	
(POUND-INCHES)	2963
(OUNCES)	2965
(POUNDS)	2967
SI (SELECT ONE)	
NEWTON METERS)	2969
(GRAMS)	2971
(NEWTONS)	2973
PERMANENT SET	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3021

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2957	THE SPRING LOAD SHALL BE NOT LESS THAN 2957 NEWTON METERS.
2959	THE SPRING LOAD SHALL BE NOT LESS THAN 2959 GRAMS.
2961	THE SPRING LOAD SHALL BE NOT LESS THAN 2961 NEWTONS.
2963	THE SPRING LOAD SHALL BE NOT GREATER THAN 2963 POUND-INCHES.
2965	THE SPRING LOAD SHALL BE NOT GREATER THAN 2965 OUNCES.
2967	THE SPRING LOAD SHALL BE NOT GREATER THAN 2967 POUNDS.
2969	THE SPRING LOAD SHALL BE NOT GREATER THAN 2969 NEWTON METERS.
2971	THE SPRING LOAD SHALL BE NOT GREATER THAN 2971 GRAMS.
2973	THE SPRING LOAD SHALL BE NOT GREATER THAN 2973 NEWTONS.
3021	PERMANENT SET. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3021.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PERMANENT SET (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	3023
MAXIMUM PERMANENT SET (SELECT ONE)	
(INCH)	3025
(MILLIMETERS)	3027
(DEGREES)	3029
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3041
AS FOLLOWS:	3043
MINIMUM TEST LOAD (SELECT ONE)	
U.S. (SELECT ONE)	
(POUNDS)	3045
(POUND-INCHES)	3047
SI (SELECT ONE)	
(NEWTONS)	3049
(NEWTON METERS)	3051

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

3023 PERMANENT SET. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

3025 PERMANENT SET SHALL BE NOT GREATER THAN 3025 INCH(S).

3027 PERMANENT SET SHALL BE NOT GREATER THAN 3027 MILLIMETERS.

3029 PERMANENT SET SHALL BE NOT GREATER THAN 3029 DEGREES.

3041 PERMANENT SET. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3041.

3043 PERMANENT SET. TESTING SHALL BE PERFORMED AS FOLLOWS:

3045 THE TEST LOAD SHALL BE NOT LESS THAN 3045 POUND(S).

3047 THE TEST LOAD SHALL BE NOT LESS THAN 3047 POUND-INCH(S).

3049 THE TEST LOAD SHALL BE NOT LESS THAN 3049 NEWTONS.

3051 THE TEST LOAD SHALL BE NOT LESS THAN 3051 NEWTON METERS.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PERMANENT SET (CONT)	
AS FOLLOWS (CONT)	
MINIMUM TEST DEFLECTION (SELECT ONE)	
(INCHES)	3053
(MILLIMETERS)	3055
(DEGREES)	3057
MINIMUM TEST TEMPERATURE	
(DEGREES CELSIUS)	3059
TEST CYCLES (NUMBER)	3061
SALT FOG	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4998
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.	4999
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4779
PER MIL-STD-810, METHOD 509.	4780
SALT SOLUTION (PERCENT)	4786
EXPOSURE PERIOD (HOURS)	4783
DRYING PERIOD (HOURS)	4775

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3053	THE TEST DEFLECTION SHALL BE NOT LESS THAN 3053 INCH(S).
3055	THE TEST DEFLECTION SHALL BE NOT LESS THAN 3055 MILLIMETERS.
3057	THE TEST DEFLECTION SHALL BE NOT LESS THAN 3057 DEGREES.
3059	THE TEST TEMPERATURE SHALL BE NOT LESS THAN 3059 DEGREES CELSIUS.
3061	THE NUMBER OF TEST CYCLES SHALL BE 3061.
4998	SALT FOG. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4998.
4999	SALT FOG. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
4779	SALT FOG. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4779.
4780	SALT FOG. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 509 OF MIL-STD-810.
4786	SOLUTION SHALL BE 4786 PERCENT SALT.
4783	DURATION OF THE TEST SHALL BE 4783 HOUR(S).
4775	DRYING PERIOD SHALL BE 4775 HOUR(S).

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SOLID HEIGHT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3121
AS FOLLOWS:	3123
MINIMUM (SELECT ONE)	
(INCHES)	3125
(MILLIMETERS)	3127
MAXIMUM (SELECT ONE)	
(INCHES)	3129
(MILLIMETERS)	3131
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3141
PER DOCUMENT (DOC DES)	3143
AS FOLLOWS:	3145
MAXIMUM TEST LOAD (SELECT ONE)	
(POUNDS)	3147
(KILOGRAMS)	3149

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3121	SOLID HEIGHT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3121.
3123	SOLID HEIGHT. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3125	THE SOLID HEIGHT SHALL BE NOT LESS THAN 3125 INCH(S).
3127	THE SOLID HEIGHT SHALL BE NOT LESS THAN 3127 MILLIMETERS.
3129	THE SOLID HEIGHT SHALL BE NOT GREATER THAN 3129 INCH(S).
3131	THE SOLID HEIGHT SHALL BE NOT GREATER THAN 3131 MILLIMETERS.
3141	SOLID HEIGHT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3141.
3143	SOLID HEIGHT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3143.
3145	SOLID HEIGHT. TESTING SHALL BE PERFORMED AS FOLLOWS:
3147	THE TEST LOAD SHALL BE NOT GREATER THAN 3147 POUNDS.
3149	THE TEST LOAD SHALL BE NOT GREATER THAN 3149 KILOGRAMS.

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SOLID HEIGHT (CONT)	
AS FOLLOWS (CONT)	
MINIMUM SOLID HEIGHT (SELECT ONE)	
(INCHES)	1705
(MILLIMETERS)	3151
MAXIMUM SOLID HEIGHT (SELECT ONE)	
(INCHES)	1707
(MILLIMETERS)	3153
SPRING RATE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3221
REMAIN WITHIN SPECIFIED TOLERANCE.	3223
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3241
PER DOCUMENT (DOC DES)	3243

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1705	THE SOLID HEIGHT SHALL BE NOT LESS THAN 1705 INCHES.
3151	THE SOLID HEIGHT SHALL BE NOT LESS THAN 3151 MILLIMETERS.
1707	THE SOLID HEIGHT SHALL BE NOT GREATER THAN 1707 INCHES.
3153	THE SOLID HEIGHT SHALL BE NOT GREATER THAN 3153 MILLIMETERS.
3221	SPRING RATE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3221.
3223	SPRING RATE. THE SPRING SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
3241	SPRING RATE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3241.
3243	SPRING RATE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3243.

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SPRING RATE (CONT)	
TEST METHODS (CONT)	
AS FOLLOWS:	3245
MINIMUM SPRING RATE (SELECT ONE)	
U.S. (SELECT ONE)	
(POUNDS PER INCH)	1891
(DEGREES PER POUND-INCH)	3247
SI (SELECT ONE)	
(GRAMS PER METER)	3249
(DEGREES PER GRAM-METER)	3251
MAXIMUM SPRING RATE (SELECT ONE)	
U.S. (SELECT ONE)	
(POUNDS PER INCH)	1893
(DEGREES PER POUND INCH)	3253
SI (SELECT ONE)	
(GRAMS PER METER)	3255
(DEGREES PER GRAM-METER)	3257

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3245	SPRING RATE. TESTING SHALL BE PERFORMED AS FOLLOWS:
1891	THE SPRING RATE SHALL BE NOT LESS THAN 1891 POUNDS PER INCH.
3247	THE SPRING RATE SHALL BE NOT LESS THAN 3247 DEGREES PER POUND-INCH.
3249	THE SPRING RATE SHALL BE NOT LESS THAN 3249 GRAMS PER METER.
3251	THE SPRING RATE SHALL BE NOT LESS THAN 3251 DEGREES PER GRAM-METER.
1893	THE SPRING RATE SHALL BE NOT GREATER THAN 1893 POUNDS PER INCH.
3253	THE SPRING RATE SHALL BE NOT GREATER THAN 3253 DEGREES PER POUND INCH.
3255	THE SPRING RATE SHALL BE NOT GREATER THAN 3255 GRAMS PER METER.
3257	THE SPRING RATE SHALL BE NOT GREATER THAN 3257 DEGREES PER GRAM-METER.

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STRESS CORROSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3321
NO PHYSICAL DAMAGE.	3323
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3341
PER METHOD 9 OF MIL-STD-1312	3343
MINIMUM TEST LOAD (SELECT ONE)	
(POUNDS)	3345
(NEWTONS)	3347
MINIMUM TEST DURATION (HOURS)	3349
SURFACE DEFECTS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3421
NO LAPS, CRACKS, SEAMS, OR TEARS.	3423

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3321	STRESS CORROSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3321.
3323	STRESS CORROSION. THERE SHALL BE NO PHYSICAL DAMAGE CAUSED BY STRESS CORROSION.
3341	STRESS CORROSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3341.
3343	STRESS CORROSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 9 OF MIL-STD-1312.
3345	THE TEST LOAD SHALL BE NOT LESS THAN 3345 POUNDS.
3347	THE TEST LOAD SHALL BE NOT LESS THAN 3347 NEWTONS.
3349	THE TEST DURATION SHALL BE NOT LESS THAN 3349 HOURS.
3421	SURFACE DEFECTS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3421.
3423	SURFACE DEFECTS. THERE SHALL BE NO LAPS, CRACKS, SEAMS, OR TEARS.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SURFACE DEFECTS (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3441
PER DOCUMENT (DOC DES)	3443
WORKING STRESS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3521
PER MAXIMUM WORKING STRESS TABLE.	
NOTE: THIS TABLE IS USED FOR SPECIFYING STRESS LOADS AND VALUES.	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3541
PER MIL-S-6715	3543

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

3441 SURFACE DEFECTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3441.

3443 SURFACE DEFECTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3443.

3521 WORKING STRESS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3521.

MAXIMUM WORKING STRESS

STRESS TYPE	STRESS (KSI)	STRESS (MPA)
4100	4101	4110
4102	4103	4112
4104	4105	4114
4106	4107	4116
4108	4109	4118

3541 WORKING STRESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3541.

3543 WORKING STRESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-6715.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WORKING STRESS (CONT)	
TEST METHODS (CONT)	
AS FOLLOWS:	3545
MAXIMUM WORKING STRESS (SELECT ONE)	
(KSI)	3547
(MPA)	3549
MAXIMUM DEFLECTION (SELECT ONE)	
(INCHES)	3551
(MILLIMETERS)	3553
(DEGREES)	3555
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3545	WORKING STRESS. TESTING SHALL BE AS FOLLOWS:
3547	WORKING STRESS SHALL BE NOT GREATER THAN 3547 THOUSAND POUNDS PER SQUARE INCH.
3549	WORKING STRESS SHALL BE NOT GREATER THAN 3549 MEGAPASCALS.
3551	DEFLECTION SHALL BE NOT GREATER THAN 3551 INCH(S).
3553	DEFLECTION SHALL BE NOT GREATER THAN 3553 MILLIMETERS.
3555	DEFLECTION SHALL BE NOT GREATER THAN 3555 DEGREES.
	MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-130.	7629
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35-1)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35-1)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.
	ADDITIONAL PART MARKING
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI


(project EDS-A262)

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX A

ILLUSTRATIONS


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

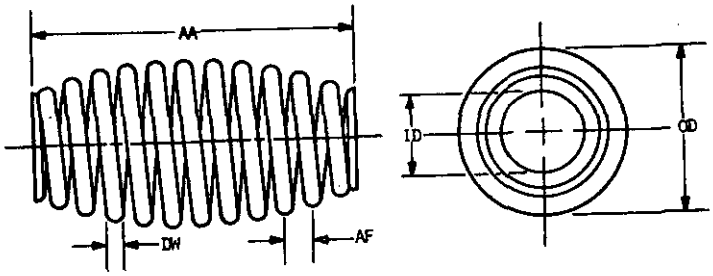

NOTES: 1. SEE END STYLE FIGURE FOR END CONFIGURATIONS.

2. RIGHT HAND HELIX SHOWN, SEE SECTION 3 OF SPECIFICATION FOR REQUIRED DIRECTION OF HELIX.

162-01-2

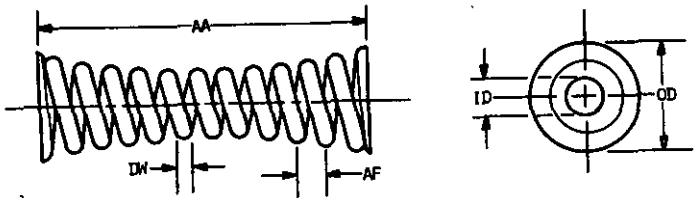


NOTES: 1. SEE END STYLE FIGURE FOR END CONFIGURATIONS.

2. RIGHT HAND HELIX SHOWN, SEE SECTION 3 OF SPECIFICATION FOR REQUIRED DIRECTION OF HELIX.

162-01-3


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

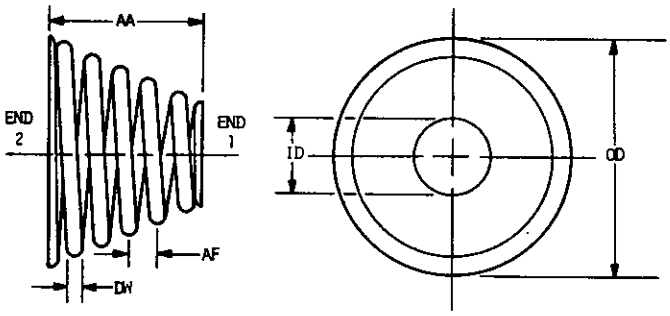

NOTES: 1. SEE END STYLE FIGURE FOR END CONFIGURATIONS.

2. RIGHT HAND HELIX SHOWN, SEE SECTION 3 OF SPECIFICATION FOR REQUIRED DIRECTION OF HELIX.

162-01-4

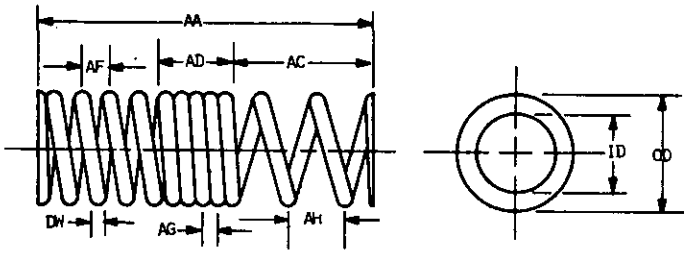


NOTES: 1. SEE END STYLE FIGURE FOR END CONFIGURATIONS.

2. RIGHT HAND HELIX SHOWN, SEE SECTION 3 OF SPECIFICATION FOR REQUIRED DIRECTION OF HELIX.

162-01-5


Source: https://assist.dla.mil --Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

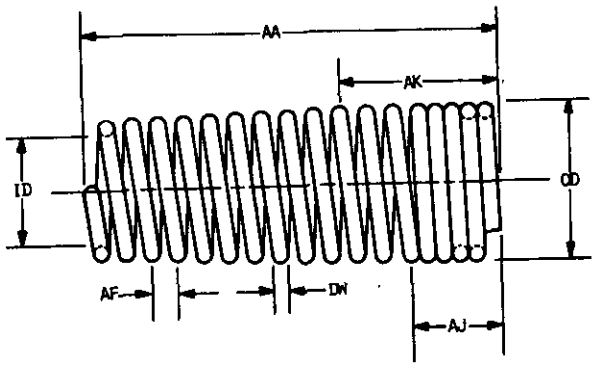

NOTES: 1. SEE END STYLE FIGURE FOR END CONFIGURATIONS.

2. RIGHT HAND HELIX SHOWN, SEE SECTION 3 OF SPECIFICATION FOR REQUIRED DIRECTION OF HELIX.

162-01-6

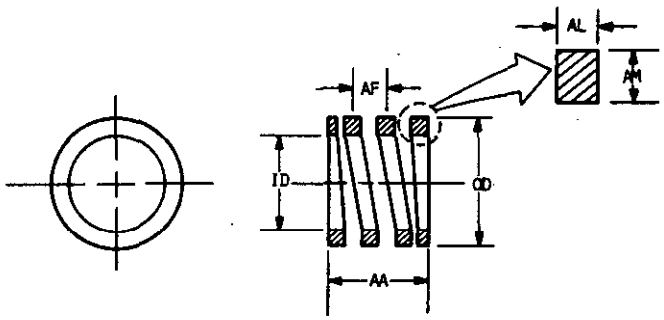


NOTES: 1. SEE END STYLE FIGURE FOR END CONFIGURATIONS.


2. RIGHT HAND HELIX SHOWN, SEE SECTION 3 OF SPECIFICATION FOR REQUIRED DIRECTION OF HELIX.

162-01-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

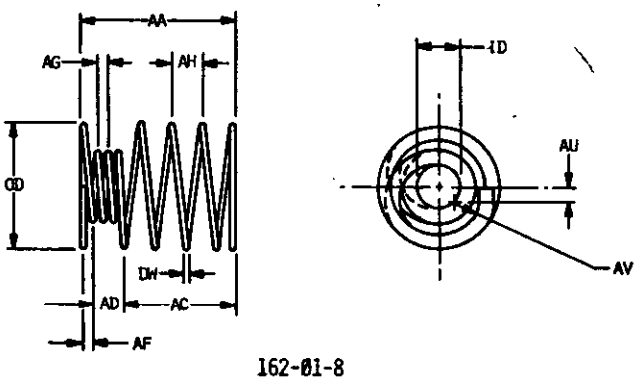

162-01-8

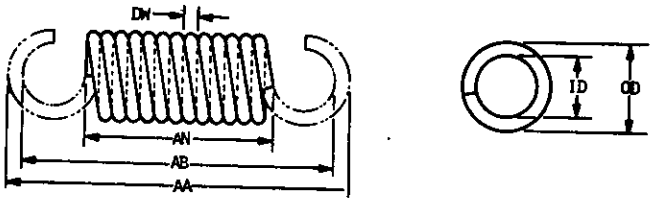


NOTES: 1. SEE END STYLE FIGURE FOR END CONFIGURATIONS.

2. RIGHT HAND HELIX SHOWN, SEE SECTION 3 OF SPECIFICATION FOR REQUIRED DIRECTION OF HELIX.

162-02-1


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

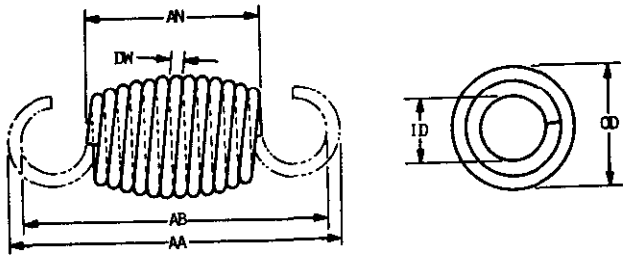

NOTES: 1. SEE END STYLE FIGURE FOR END CONFIGURATIONS.

2. LEFT HAND HELIX SHOWN, SEE SECTION 3 OF SPECIFICATION FOR REQUIRED DIRECTION OF HELIX.

162-02-2

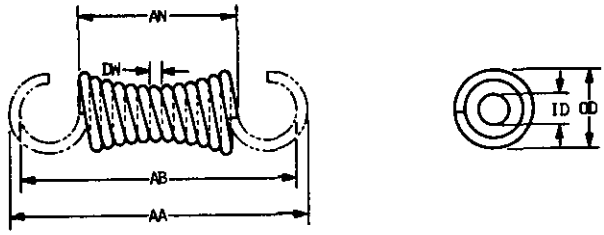


NOTES: 1. SEE END STYLE FIGURE FOR END CONFIGURATIONS.

2. RIGHT HAND HELIX SHOWN, SEE SECTION 3 OF SPECIFICATION FOR REQUIRED DIRECTION OF HELIX.

162-02-3


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

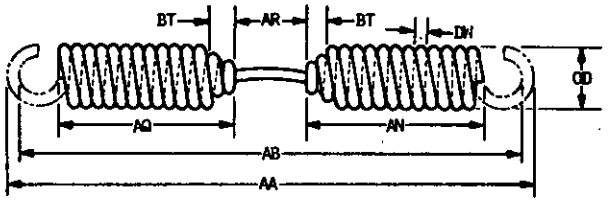

NOTES: 1. SEE END STYLE FIGURE FOR END CONFIGURATIONS.


2. RIGHT HAND HELIX SHOWN, SEE SECTION 3 OF SPECIFICATION FOR REQUIRED DIRECTION OF HELIX.

162-02-4

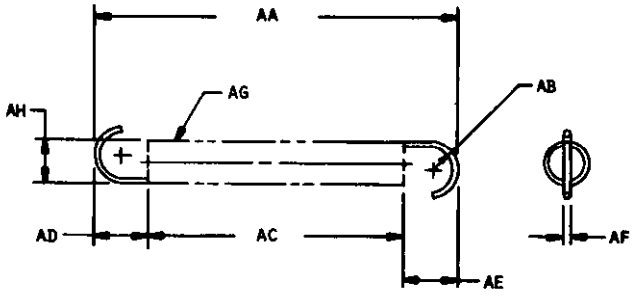

162-02-5


Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

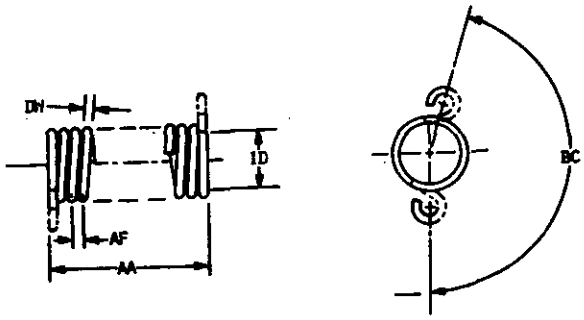

NOTES: 1. SEE END STYLE FIGURE FOR END CONFIGURATIONS.

2. LEFT HAND HELIX SHOWN, SEE SECTION 3 OF SPECIFICATION FOR REQUIRED DIRECTION OF HELIX.

162-03-1

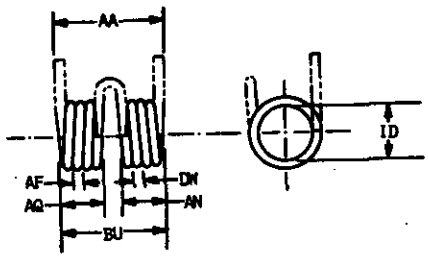


NOTES: 1. SEE END STYLE FIGURE FOR END CONFIGURATION.

2. SEE BRIDGE STYLE FIGURE FOR BRIDGE CONFIGURATION.


3. RIGHT HAND HELIX SHOWN, SEE SECTION 3 OF SPECIFICATION FOR REQUIRED DIRECTION OF HELIX.

162-03-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

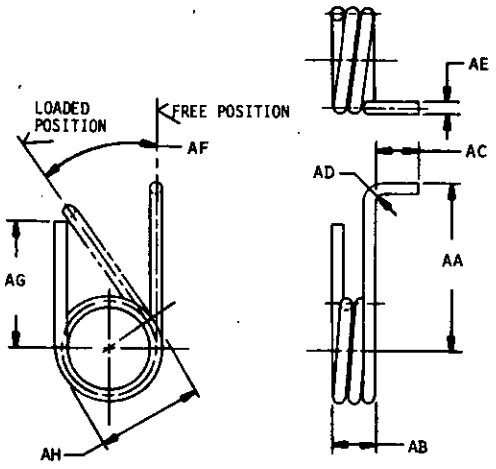


162-03-3

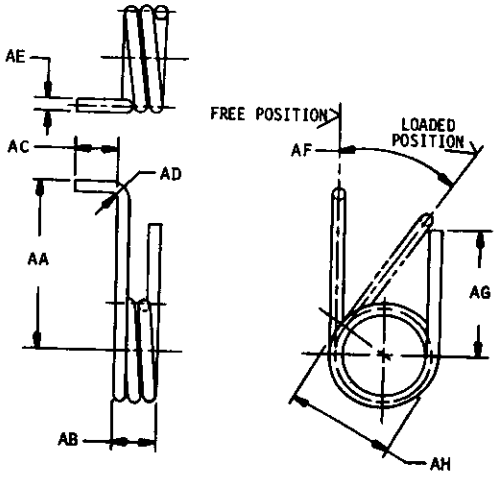


162-03-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

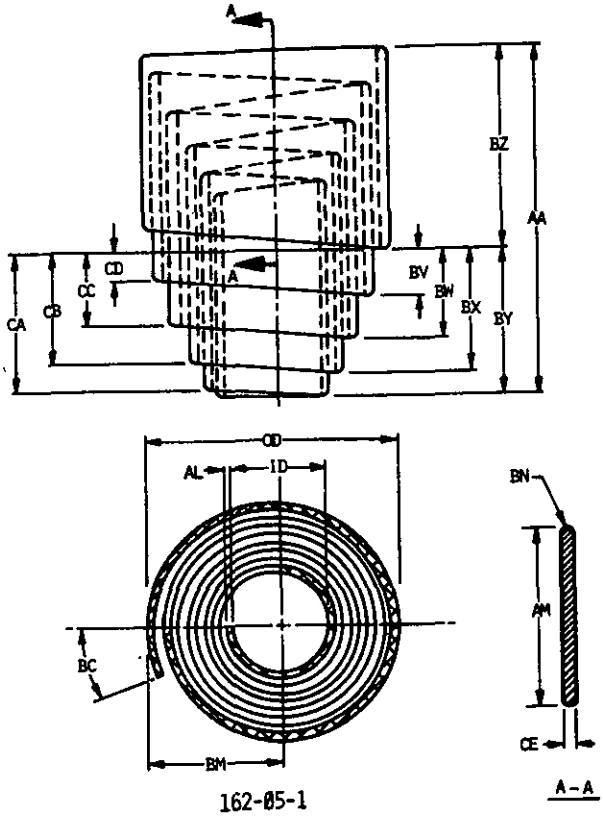


162-05-1

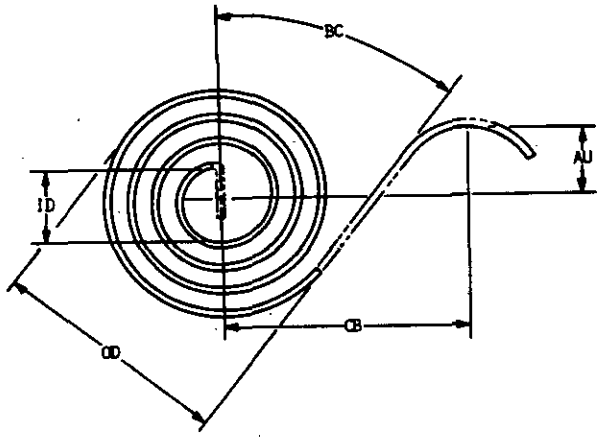



162-04-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

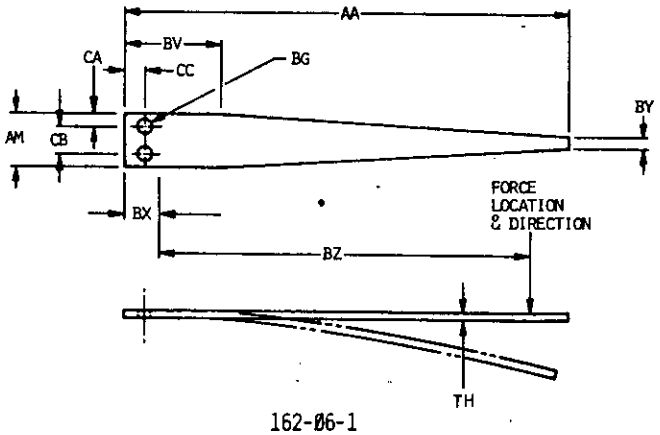


162-06-1

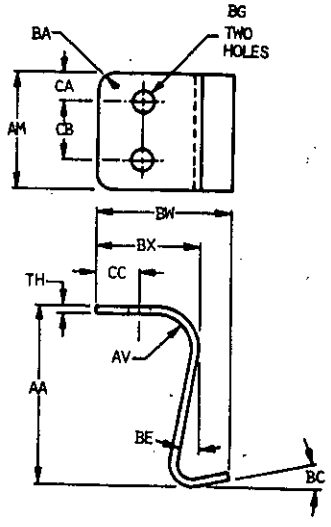




162-06-2


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

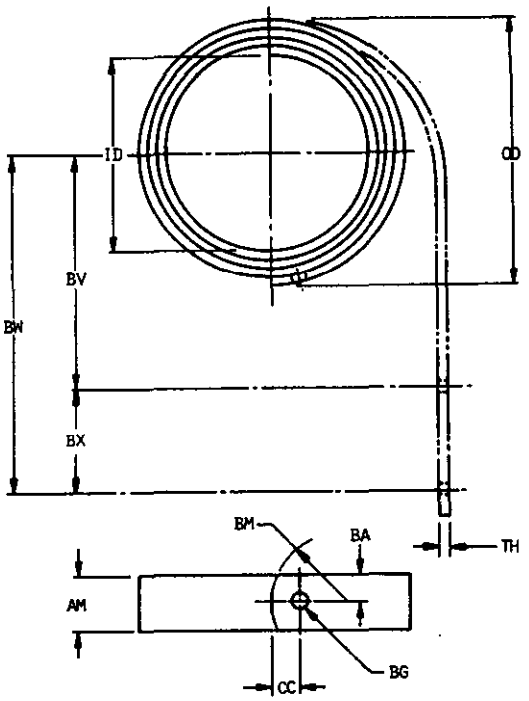

162-07-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

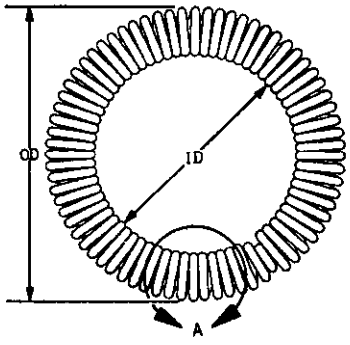

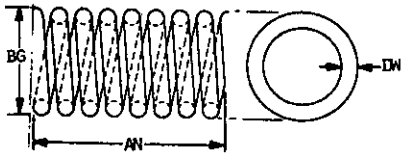


DETAIL A
(ENLARGED)


NOTES: 1. SEE END STYLE FIGURE FOR END CONFIGURATIONS.

162-08-1

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.



162-09-1

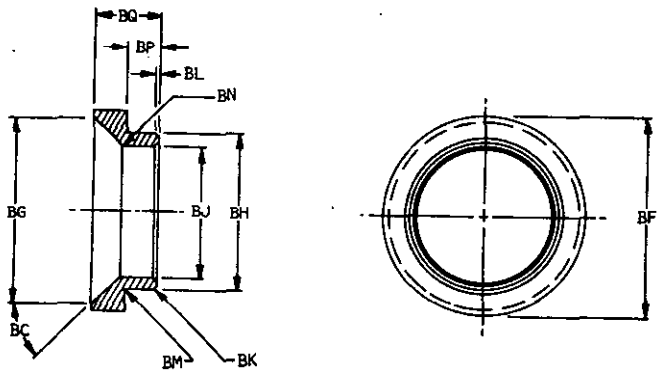

162-16-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	12	1748	24	1835	64	1930	24
0102	12	1752	26	1836	34	1932	40
0103	12	1754	26	1838	34	1934	24
0104	12	1756	26	1839	34	1936	24
0105	12	1758	26	1840	34	2121	42
0107	14	1760	30	1842	34	2125	42
0108	14	1762	32	1844	34	2141	44
0700	12	1766	26	1850	34	2143	44
0800	12	1768	26	1862	38	2145	44
1003	12	1780	26	1864	36	2147	44
1004	12	1782	28	1866	36	2149	44
1005	12	1784	28	1868	36	2151	44
1006	12	1786	28	1870	36	2221	44
1008	12	1788	28	1872	36	2223	44
1009	16	1790	28	1874	36	2225	44
1554	58	1792	28	1876	36	2227	44
1613	22	1794	28	1878	36	2229	44
1661	26	1796	28	1880	36	2231	46
1663	26	1797	28	1882	38	2233	46
1702	20	1798	28	1884	38	2235	46
1704	20	1800	30	1886	38	2237	46
1705	80	1802	30	1888	38	2290	46
1706	20	1804	30	1890	38	2311	46
1707	80	1806	30	1891	82	2323	46
1708	20	1808	30	1892	38	2325	46
1710	20	1810	30	1893	82	2327	46
1712	20	1812	32	1894	38	2329	48
1714	20	1814	32	1896	38	2331	48
1716	20	1816	32	1898	38	2333	48
1720	16	1818	32	1906	48	2341	48
1722	16	1820	32	1908	40	2343	48
1724	16	1822	32	1910	40	2421	48
1726	16	1824	32	1912	40	2423	48
1730	22	1826	32	1914	48	2425	48
1732	22	1828	34	1916	40	2427	48
1735	22	1830	34	1920	24	2429	48
1740	22	1831	64	1922	24	2441	50
1742	22	1832	34	1924	24	2443	50
1744	22	1833	62	1926	24	2445	50
1746	24	1834	34	1928	24	2447	50

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2449	50	2757	64	2965	72	3247	82
2451	50	2759	64	2967	72	3249	82
2453	50	2761	64	2969	72	3251	82
2455	50	2763	64	2971	72	3253	82
2521	50	2765	64	2973	72	3255	82
2523	50	2767	64	3021	72	3257	82
2525	50	2769	64	3023	74	3321	84
2527	50	2821	64	3025	74	3323	84
2529	50	2823	66	3027	74	3341	84
2531	50	2841	66	3029	74	3343	84
2541	52	2843	66	3041	74	3345	84
2543	52	2845	66	3043	74	3347	84
2545	52	2847	66	3045	74	3349	84
2547	52	2849	66	3047	74	3421	84
2549	52	2851	66	3049	74	3423	84
2551	52	2853	66	3051	74	3441	86
2553	52	2855	66	3053	76	3443	86
2621	58	2857	68	3055	76	3521	86
2623	58	2859	68	3057	76	3541	86
2641	58	2861	68	3059	76	3543	86
2643	58	2863	68	3061	76	3545	88
2645	60	2865	68	3121	78	3547	88
2647	60	2867	68	3123	78	3549	88
2649	60	2869	68	3125	78	3551	88
2651	60	2871	68	3127	78	3553	88
2653	60	2873	68	3129	78	3555	88
2655	60	2921	70	3131	78	3621	52
2657	60	2923	70	3141	78	3623	52
2659	60	2941	70	3143	78	3625	52
2661	60	2943	70	3145	78	3629	54
2721	62	2945	70	3147	78	3641	54
2723	62	2947	70	3149	78	3643	54
2725	62	2949	70	3151	80	3645	54
2741	62	2951	70	3153	80	3649	54
2745	62	2953	70	3221	80	4100	87
2747	62	2955	70	3223	80	4101	87
2749	62	2957	72	3227	52	4102	87
2751	62	2959	72	3241	80	4103	87
2753	62	2961	72	3243	80	4104	87
2755	62	2963	72	3245	82	4105	87

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4106	87	6941	14				
4107	87	6942	14				
4108	87	6943	40				
4109	87	6944	40				
4110	87	6945	42				
4112	87	6946	42				
4114	87	6991	90				
4116	87	6992	90				
4118	87	6993	90				
4716	56	6994	90				
4764	56	6995	90				
4767	56	7001	88				
4775	76	7002	88				
4777	56	7003	88				
4778	56	7004	88				
4779	76	7005	88				
4780	76	7031	42				
4783	76	7032	42				
4786	76	7033	42				
4788	54	7034	42				
4798	54	7572	16				
4799	54	7573	16				
4800	56	7577	18				
4871	56	7578	18				
4905	16	7629	90				
4916	58						
4950	18						
4998	76						
4999	76						
5054	16						
5068	16						
6334	56						
6335	56						
6336	56						
6337	56						
6369	12						
6372	90						
6870	88						
6873	12						
6874	14						

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Additional Part Marking	90
Additional Requirements	88
Aperture Cards Required	14
Applicable Documents	90
Band Length	36
Base Document	12
Bearing Surface	22
Bending	42
Bore Diameter	32
City, State, Zip	12
Class	16
Classification	16
Cleanliness	40
Company Name/Command	12
Concentricity	26
Configuration	16
Contract Number/Office Symbol	12
Control, Source	12
Control, Specification	14
Date	12
Decarburization	44
Deflection	46
Design and Construction	20
Direction of Helix	26
Direction of Strand Helix	28
Drum Diameter	36
Embrittlement Relief	48
End Orientation	24
End Squareness	22
Fatigue	50
Fatigue Life	36
Final Operating Position	34
Finishes	18
Format	12
Free Length	52
Government Design Activity FSCM	12
Grade	16
Ground Ends	22

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Heat Treatment	38
Humidity	54
Illustrations	18
Initial Operating Position	32
Initial Tension	58
Load	62
Load, Final Operating	64
Load, Initial Operating	70
Mandrel Diameter	24
Materials	18
Mounting Hardware	88
Nomenclature	90
Notes	90
Number of Coils	26
Packaging	90
Part Marking	90
Part Number	14
Part Number Cross-Reference	90
Permanent Set	72
Phone Number	12
Pitch	24
Pitch of Strand Helix	28
Quality Assurance Provisions	90
Requester FSCM	12
Requester's Name	12
Revision of AEDPS Document (Number)	14
Salt Fog	76
Scope	14
Shaft Diameter	30
Solid Diameter	30
Solid Height	78
Source Table	14
Spring Bearing Surface Roughness Height	36
Spring Bearing Surface Waviness	36
Spring Rate	38, 80
Stock Shape	24

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Stranded Wire	26
Street/Building	12
Stress Corrosion	84
Style	16
Superseded Document	90
Surface Defects	84
Surface Roughness	34
Surface Waviness	34
System Application	12
Tabulated Characteristics	18
Tapered End Diameter	20
Temperature Rating	16
Tensile Strength, Finished Spring	40
Type	16
Units of Measure	14, 16
Weight	40
Wire End Closure	28
Wire Taper	20
Working Stress	86
Workmanship	88

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-27A(MI), dated 2 February 1979 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
DoD-STD 35-27A

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander,
U.S. Army Missile R & D Command
ATTN: DRDMI-ESD
Redstone Arsenal, Alabama 35809

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.