DOD-STD-35-30A(MI)
15 February 1979
SUPERSEDING
MIL-STD-35-30(MI)
12 NOVEMBER 1973

MILITARY STANDARD

CIRCUIT BREAKERS

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

FSC EDS

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Circuit Breakers
Automated Engineering
Document Preparation System

DOD-STD-35-30A(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-30A(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for Circuit Breakers.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	4
	2.1	Issues of documents	4
	2.2	Other publications	5
	3.	DEFINITIONS	6
	4.	GENERAL REQUIREMENTS	7
	4.1	Introduction	7
	4.2	Specification Requirement Sheet (SRS)	7
	4.3	Configuration	7
	4.3.1	Dimensions	7
	4.3.2	Illustrations	7
	4.4	Units of measure	7
	5.	DETAILED REQUIREMENTS	8
	5.1	Introduction	8
	5.2	MSE Formats	8
	5.3	Referenced documents	8
	5.4	Test matrix	8
	5.5	Tabulation	9
	5.6	Keyword Code Index (KCI) and Standard Paragraphs	11
	5.6.1	Interrelationship of Codes	11
	5.6.2	Automatic MSE Data	11
	5.6.3	DOD-STD-35 Tables	11

TABLES

Table	I.	Title Index	2
	II.	Test matrix	9
	III.	Tabulation candidates	10

APPENDICES

Appendix	A.	Illustrations	152
	B.	Characteristic Code Index	190
		Index	196

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for Circuit Breakers.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. It is recommended that MIL-STD-1498, Selection and Use of Circuit Breakers, be reviewed prior to using this dash-numbered part book.

The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
CIRCUIT BREAKER	052006	W-C-375	MOLDED CASE
		MIL-C-5809	TRIP-FREE, AIRCRAFT
		MIL-C-7079	NON TRIP-FREE
		MIL-C-8379	ELECTRICALLY OPERATED
		MIL-C-13516	28 VOLT
		MIL-C-17361	INSULATED ENCLOSURE
		MIL-C-17587	OPEN FRAME
		MIL-C-17588	125 AND BELOW
		MIL-C-27715	TRIP-FREE, HIGH TEMPERATURE
		MIL-C-39019	TRIP-FREE, LOW POWER
		MIL-C-55629	UNSEALED, TRIP-FREE
		MIL-C-83383	REMOTE CONTROL TRIP-FREE
		MS3320	1-20 AMPS TRIP-FREE
		MS14105	25-35 AMPS TRIP-FREE
		MS14153	1-35 AMPS, 3 PH TRIP-FREE
		MS14154	2-10 AMPS, 3 PH TRIP-FREE
		MS21984	5-60 AMPS, 3 PH TRIP-FREE
		MS22073	1/2-10 AMPS TRIP-FREE
		MS22074	1-5 AMPS TRIP-FREE
		MS24506	5-50 AMPS NON TRIP-FREE
		MS24509	3-35 AMPS TOGGLE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
CIRCUIT BREAKER	052006 (CONT)	MS24510	3-35 AMPS PUSH-PULL
		MS24571	2 1/2-50 AMPS TRIP-FREE
		MS25017	5-50 AMPS TRIP-FREE
		MS25244	5-35 AMPS TRIP-FREE
		MS25304	0.1-50 AMP TRIP-FREE
		MS25337	5-50 AMP TRIP-FREE
		MS25361	50-100 AMPS TRIP-FREE
		MS26574	1/2-10 AMPS TRIP-FREE
		MS90351	5-50 AMPS 3 PH TRIP-FREE
CIRCUIT BREAKER, MAGNETIC, TRIP-FREE	052001	MIL-C-5809	GENERAL SPECIFICATION
		MIL-C-8379	ELECTRICALLY OPERATED
		MIL-C-17361	INSULATED ENCLOSURE
		MIL-C-39019	LOW POWER
		MIL-C-55629	UNSEALED
		MIL-C-83383	REMOTE CONTROL
CIRCUIT BREAKER, REMOTE CONTROL	052002	MIL-C-83383	TRIP-FREE
CIRCUIT BREAKER, THERMAL, NON TRIP-FREE	052004	MIL-C-7079	GENERAL SPECIFICATION
CIRCUIT BREAKER, THERMAL, TRIP-FREE	052005	MIL-C-5809	GENERAL SPECIFICATION
		MIL-C-13516	28 VOLT
		MIL-C-27715	HIGH TEMP
		MIL-C-83383	REMOTE CONTROL

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-S-901	Shock Tests (High Impact) Shipboard Machinery, Equipment and Systems, Requirements For
MIL-C-7079	Circuit Breakers, Non Trip-Free, General Specification For
MIL-E-13856	Electrical Components for Automotive Vehicles; Waterproofness Tests
MIL-F-13927	Fungus Resistance Test; Automotive Components
MIL-C-83383	Circuit Breakers, Remote Control, Thermal, Trip-Free, General Specification For

STANDARDS

MILITARY

DOD-STD-35	*Automated Engineering Document Preparation* System
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-167-1	Mechanical Vibrations of Shipboard Equipment (Type I - Environmental and Type II - Internally Excited)
MIL-STD-202	Test Methods for Electronic and Electrical Parts
MIL-STD-461	Electromagnetic Interference Characteristics, Requirements for Equipment
MIL-STD-462	*Electromagnetic Interference Characteristics*, Measurement Of
MIL-STD-810	Environmental Test Methods for Aerospace and Ground Equipment

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

MIL-STD-1285 Marking of Electrical and Electronic Parts

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTME380 Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Circuit Breakers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for Circuit Breakers, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Circuit Breakers.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Circuit Breakers.

4.3.2 Illustrations. Illustrations applicable to Circuit Breakers are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Test matrix. A test matrix is supplied as a guide for selecting documents to specify tests (see table II). The test matrix presents documents most applicable for use to satisfy the statement "TEST PER (DOC DES)". Any document listed in the Title Index may be used to satisfy the statement. However, the selected document from the Title Index must contain the desired test. Government test method documents and approved industry standards such as ASTM test methods may also be used to satisfy the statement "TEST PER (DOC DES)".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE II. TEST MATRIX.

DOCUMENT	CODE	1610	1680	1736	1772	1848	1862	1880	1912	1932	1970	2312	3700	3702	2326
	TEST	Calibration	Coordination	Endurance, Electrical	Endurance, Mechanical	Inclination	Interrupting Capacity	Operating Force	Overload	Reclosing	Strength of Actuating Means	Strength of Mounting Means	Temperature, High	Temperature, Low	Temperature, Rise
MIL-C-5809		X		X	X		X	X	X	X	X	X			
MIL-C-7079		X		X	X		X	X	X	X	X	X	X		X
MIL-C-13516		X		X					X						
MIL-C-17361		X		X	X	X	X								X
MIL-C-17587		X		X	X	X	X								X
MIL-C-17588		X		X		X	X								X
MIL-C-39019		X		X	X		X	X			X		X	X	X
MIL-C-55629		X		X	X		X	X			X	X	X	X	X
MIL-C-83383		X	X	X	X		X	X	X				X	X	X

5.5 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table III provides codes for column headings which may be used for circuit breaker characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
7609	MAXIMUM VOLTAGE RATING VOLTS AC	7610	MAXIMUM VOLTAGE RATING VOLTS DC	7611	MAXIMUM VOLTAGE RATING VOLTS RMS
7594	MAXIMUM CURRENT RATING AMPERES	7595	MAXIMUM CURRENT RATING MILLIAMPS	7627	FREQUENCY RATING HERTZ
7618	NOMINAL VOLTAGE RATING VOLTS AC	7619	NOMINAL VOLTAGE RATING VOLTS DC	7620	NOMINAL VOLTAGE RATING VOLTS RMS
7597	NOMINAL CURRENT RATING AMPERES	7598	NOMINAL CURRENT RATING MILLIAMPS		

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

5.6 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.6.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.6.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.6.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT	0700
ONE SECTION DOCUMENT	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6874	THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).
0107	
0108	0108. SCOPE. SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.
	PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.
	PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.
6941	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.
6942	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION	
TYPE (DESIGNATION)	1562
STYLE (DESIGNATION)	1564
GRADE (DESIGNATION)	1566
CLASSIFICATION (DESIGNATION)	1568
ACCESSORY (DESIGNATION)	1570
ALTITUDE RATING	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5060
SEA LEVEL TO (METERS)	5061
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5062
SEA LEVEL TO (METERS)	5063

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CLASSIFICATION.
1562	THE ITEM(S) TYPE DESIGNATION SHALL BE 1562 IN ACCORDANCE WITH THE BASE DOCUMENT.
1564	THE ITEM(S) STYLE DESIGNATION SHALL BE 1564 IN ACCORDANCE WITH THE BASE DOCUMENT.
1566	THE ITEM(S) GRADE DESIGNATION SHALL BE 1566 IN ACCORDANCE WITH THE BASE DOCUMENT.
1568	THE ITEM(S) CLASSIFICATION SHALL BE 1568 IN ACCORDANCE WITH THE BASE DOCUMENT.
1570	THE ITEM(S) ACCESSORY DESIGNATION SHALL BE 1570 IN ACCORDANCE WITH THE BASE DOCUMENT.
	ALTITUDE RATING.
5060	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5060 FEET.
5061	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5061 METERS.
5062	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5062 FEET.
5063	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5063 METERS.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE RATING	
MAXIMUM OPERATING (DEGREES CELSIUS)	5069
MAXIMUM NONOPERATING (DEGREES CELSIUS)	5071
MAXIMUM STORAGE (DEGREES CELSIUS)	7302
MAXIMUM SERVICE (DEGREES CELSIUS)	4905
MAXIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5054
MINIMUM OPERATING (DEGREES CELSIUS)	5068
MINIMUM NONOPERATING (DEGREES CELSIUS)	5070
MINIMUM STORAGE (DEGREES CELSIUS)	7301
MINIMUM SERVICE (DEGREES CELSIUS)	4904
MINIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5052
NOMINAL OPERATING (DEGREES CELSIUS)	5046
NOMINAL STORAGE (DEGREES CELSIUS)	5048

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currenversion before use.

CHAR CODE	STANDARD PARAGRAPH
	TEMPERATURE RATING.
5069	THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS.
5071	THE MAXIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5071 DEGREES CELSIUS.
7302	THE MAXIMUM STORAGE TEMPERATURE RATING SHALL BE 7302 DEGREES CELSIUS.
4905	THE MAXIMUM SERVICE TEMPERATURE RATING SHALL BE 4905 DEGREES CELSIUS.
5054	THE MAXIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5054 DEGREES CELSIUS.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.
5070	THE MINIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5070 DEGREES CELSIUS.
7301	THE MINIMUM STORAGE TEMPERATURE RATING SHALL BE 7031 DEGREES CELSIUS.
4904	THE MINIMUM SERVICE TEMPERATURE RATING SHALL BE 4904 DEGREES CELSIUS.
5052	THE MINIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5052 DEGREES CELSIUS.
5046	THE NOMINAL OPERATING TEMPERATURE RATING SHALL BE 5046 DEGREES CELSIUS.
5048	THE NOMINAL STORAGE TEMPERATURE RATING SHALL BE 5048 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CURRENT RATING	
MINIMUM CURRENT (SELECT ONE)	
(AMPERES)	7591
(MILLIAMPERES)	7592
MAXIMUM CURRENT (SELECT ONE)	
(AMPERES)	7594
(MILLIAMPERES)	7595
NOMINAL CURRENT (SELECT ONE)	
(AMPERES)	7597
(MILLIAMPERES)	7598
POWER RATING	
MINIMUM POWER (SELECT ONE)	
(WATTS)	7631
(KILOWATTS)	7632
(MILLIWATTS)	7633
(VOLTAMPERES)	7645
MAXIMUM POWER (SELECT ONE)	
(WATTS)	7634
(KILOWATTS)	7635
(MILLIWATTS)	7636
(VOLTAMPERES)	7646

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CURRENT RATING.
7591	THE MINIMUM CURRENT RATING SHALL BE 7591 AMPERE(S).
7592	THE MINIMUM CURRENT RATING SHALL BE 7592 MILLIAMPERE(S).
7594	THE MAXIMUM CURRENT RATING SHALL BE 7594 AMPERE(S).
7595	THE MAXIMUM CURRENT RATING SHALL BE 7595 MILLIAMPERE(S).
7597	THE NOMINAL CURRENT RATING SHALL BE 7597 AMPERE(S).
7598	THE NOMINAL CURRENT RATING SHALL BE 7598 MILLIAMPERE(S).
	POWER RATING.
7631	THE MINIMUM POWER RATING SHALL BE 7631 WATT(S).
7632	THE MINIMUM POWER RATING SHALL BE 7632 KILOWATT(S).
7633	THE MINIMUM POWER RATING SHALL BE 7633 MILLIWATT(S).
7645	THE MINIMUM POWER RATING SHALL BE 7645 VOLTAMPERE(S).
7634	THE MAXIMUM POWER RATING SHALL BE 7634 WATT(S).
7635	THE MAXIMUM POWER RATING SHALL BE 7635 KILOWATT(S).
7636	THE MAXIMUM POWER RATING SHALL BE 7636 MILLIWATT(S).
7646	THE MAXIMUM POWER RATING SHALL BE 7646 VOLTAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
POWER RATING (CONT)	
NOMINAL POWER (SELECT ONE)	
(WATTS)	7637
(KILOWATTS)	7638
(MILLIWATTS)	7639
(VOLTAMPERES)	7647
VOLTAGE RATING	
MINIMUM VOLTAGE (SELECT ONE)	
VOLTS	
(VOLTS AC)	7600
(VOLTS DC)	7601
(VOLTS RMS)	7602
MILLIVOLTS	
(MILLIVOLTS AC)	7603
(MILLIVOLTS DC)	7604
(MILLIVOLTS RMS)	7605
MAXIMUM VOLTAGE (SELECT ONE)	
VOLTS	
(VOLTS AC)	7609
(VOLTS DC)	7610
(VOLTS RMS)	7611

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7637	THE NOMINAL POWER RATING SHALL BE 7637 WATT(S).
7638	THE NOMINAL POWER RATING SHALL BE 7638 KILOWATT(S).
7639	THE NOMINAL POWER RATING SHALL BE 7639 MILLIWATT(S).
7647	THE NOMINAL POWER RATING SHALL BE 7647 VOLTAMPERE(S).
	VOLTAGE RATING.
7600	THE MINIMUM VOLTAGE RATING SHALL BE 7600 VOLT(S) AC.
7601	THE MINIMUM VOLTAGE RATING SHALL BE 7601 VOLT(S) DC.
7602	THE MINIMUM VOLTAGE RATING SHALL BE 7602 VOLT(S) RMS.
7603	THE MINIMUM VOLTAGE RATING SHALL BE 7603 MILLIVOLT(S) AC.
7604	THE MINIMUM VOLTAGE RATING SHALL BE 7604 MILLIVOLT(S) DC.
7605	THE MINIMUM VOLTAGE RATING SHALL BE 7605 MILLIVOLT(S) RMS.
7609	THE MAXIMUM VOLTAGE RATING SHALL BE 7609 VOLT(S) AC.
7610	THE MAXIMUM VOLTAGE RATING SHALL BE 7610 VOLT(S) DC.
7611	THE MAXIMUM VOLTAGE RATING SHALL BE 7611 VOLT(S) RMS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VOLTAGE RATING (CONT)	
MAXIMUM VOLTAGE (CONT)	
MILLIVOLTS	
(MILLIVOLTS AC)	7612
(MILLIVOLTS DC)	7613
(MILLIVOLTS RMS)	7614
NOMINAL VOLTAGE (SELECT ONE)	
VOLTS	
(VOLTS AC)	7618
(VOLTS DC)	7619
(VOLTS RMS)	7620
MILLIVOLTS	
(MILLIVOLTS AC)	7621
(MILLIVOLTS DC)	7622
(MILLIVOLTS RMS)	7623
FREQUENCY RATING	
(HERTZ)	7627

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7612	THE MAXIMUM VOLTAGE RATING SHALL BE 7612 MILLIVOLT(S) AC.
7613	THE MAXIMUM VOLTAGE RATING SHALL BE 7613 MILLIVOLT(S) DC.
7614	THE MAXIMUM VOLTAGE RATING SHALL BE 7614 MILLIVOLT(S) RMS.
7618	THE NOMINAL VOLTAGE RATING SHALL BE 7618 VOLT(S) AC.
7619	THE NOMINAL VOLTAGE RATING SHALL BE 7619 VOLT(S) DC.
7620	THE NOMINAL VOLTAGE RATING SHALL BE 7620 VOLT(S) RMS.
7621	THE NOMINAL VOLTAGE RATING SHALL BE 7621 MILLIVOLT(S) AC.
7622	THE NOMINAL VOLTAGE RATING SHALL BE 7622 MILLIVOLT(S) DC.
7623	THE NOMINAL VOLTAGE RATING SHALL BE 7623 MILLIVOLT(S) RMS.
	FREQUENCY RATING.
7627	THE FREQUENCY RATING SHALL BE 7627 HERTZ.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
*UNITS (SELECT ONE)	
U.S.	
INCHES.	7572
SI (SELECT ONE)	
CENTIMETERS.	7576
MILLIMETERS.	7577
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950

NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.

TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)

MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)

NOTE: AUTOMATIC WHEN TABLE VII IS USED.

FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)

NOTE: AUTOMATIC WHEN TABLE IX IS USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7576	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN CENTIMETERS OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.

MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
METALS	
DISSIMILAR METALS.	7580
DESIGN AND CONSTRUCTION	
ENCLOSURE (SELECT ONE)	
WATERPROOF.	1572
NONWATERPROOF.	1574
SEALED.	1576
UNSEALED.	1577
HERMETICALLY SEALED.	1578
OTHER ____	1580
WEIGHT	
MAXIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7580	METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.
	DESIGN AND CONSTRUCTION.
1572	ENCLOSURE. THE ITEM(S) ENCLOSURE SHALL BE WATERPROOF.
1574	ENCLOSURE. THE ITEM(S) ENCLOSURE SHALL BE NONWATERPROOF.
1576	ENCLOSURE. THE ITEM(S) ENCLOSURE SHALL BE SEALED.
1577	ENCLOSURE. THE ITEM(S) ENCLOSURE SHALL BE UNSEALED.
1578	ENCLOSURE. THE ITEM(S) ENCLOSURE SHALL BE HERMETICALLY SEALED.
1580	ENCLOSURE. THE ITEM(S) ENCLOSURE SHALL BE 1580.
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7023	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
MAXIMUM WEIGHT PER UNIT (CONT)	
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024
NOMINAL WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	6996
(POUNDS)	6997
SI (SELECT ONE)	
(GRAMS)	6998
(KILOGRAMS)	6999
ACCELERATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6272
NO EVIDENCE OF PHYSICAL DAMAGE.	6273

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7021	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).
6996	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6996 OUNCE(S).
6997	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6997 POUND(S).
6998	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6998 GRAM(S).
6999	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6999 KILOGRAM(S).
6272	ACCELERATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6272.
6273	ACCELERATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATION (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
REMAIN WITHIN SPECIFIED TOLERANCE.	6277
NO DISCONTINUITY.	7345
NO LAMP IN TEST CIRCUIT SHALL LIGHT.	1547
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6250
PER MIL-STD-202, METHOD 212.	6251
*TEST CONDITION LETTER (SELECT ONE)	
TEST CONDITION LETTER A.	6226
*LEVEL (SELECT ONE)	
20 G'S.	4863
50 G'S.	4864
100 G'S.	4865
TEST CONDITION LETTER B.	6233
*LEVEL (SELECT ONE)	
10,000 G'S.	4868
20,000 G'S.	4892

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6277	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
7345	THERE SHALL BE NO ELECTRICAL DISCONTINUITY DURING THE TEST.
1547	NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.
6250	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6250.
6251	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 212 OF MIL-STD-202.
6226	TEST CONDITION LETTER A SHALL APPLY.
4863	THE TEST LEVEL SHALL BE 20 G'S.
4864	THE TEST LEVEL SHALL BE 50 G'S.
4865	THE TEST LEVEL SHALL BE 100 G'S.
6233	TEST CONDITION LETTER B SHALL APPLY.
4868	THE TEST LEVEL SHALL BE 10,000 G'S.
4892	THE TEST LEVEL SHALL BE 20,000 G'S.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATION (CONT)	
TEST CONDITION LETTER B. (CONT)	
DIRECTION (SELECT ONE)	
ONE DIRECTION.	1557
BOTH DIRECTIONS.	1558
TEST CONDITION LETTER C.	6239
*LEVEL (G'S.)	4893
MOUNTING (SELECT ONE)	
MOUNT BY ANY SUITABLE METHOD.	6263
MOUNT BY NORMAL METHOD.	6264
MOUNT PER DOCUMENT (DOC DES)	6265
PERCENT RATED LOAD APPLIED (PERCENT)	6210
MONITOR PER METHOD 310 OF MIL-STD-202	
*TEST CIRCUIT (LETTER)	1548
*TEST CONDITION (LETTER)	1549

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1557	THE SPECIMEN SHALL BE ACCELERATED IN ONE DIRECTION ONLY.
1558	THE SPECIMEN SHALL BE ACCELERATED IN BOTH DIRECTIONS.
6239	TEST CONDITION LETTER C SHALL APPLY.
4893	THE TEST LEVEL SHALL BE 4893 G'S.
6263	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
6264	MOUNTING SHALL BE BY THE NORMAL METHOD.
6265	MOUNTING SHALL BE IN ACCORDANCE WITH 6265.
6210	THE ELECTRICAL LOAD SHALL BE 6210 PERCENT OF THE RATED LOAD.
1548	MONITORING DURING THE TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1548 SHALL APPLY.
1549	TEST CONDITION LETTER 1549 IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CALIBRATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1600
PER CALIBRATION (TRIPPING TIMES) TABLE.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE | STANDARD PARAGRAPH

1600 CALIBRATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1600.

CALIBRATION. THE TRIPPING TIME(S) SHALL BE IN ACCORDANCE WITH THE CURRENT RATING AND TRIPPING RANGE TABLE.

CALIBRATION (TRIPPING TIMES) TABLE

OVERLOAD (PERCENT OF RATED CURRENT)	TRIPPING TIMES (SECONDS)		
	LOW TEMPERATURE	ROOM AMBIENT	HIGH TEMPERATURE
2001	2003	2005	2009
2008	2010	2012	2014
2015	2017	2019	2021
2022	2024	2026	2028
2029	2031	2033	2035
2036	2038	2040	2042
2043	2045	2047	2049
2050	2052	2054	2056
2057	2059	2061	2063
2064	2066	2068	2070
2071	2073	2075	2077
2078	2080	2082	2084
2085	2087	2089	2091
2092	2094	2096	2098

NOTE A: 2100.
NOTE B: 2101.
NOTE C: 2102.
NOTE D: 2103.
NOTE E: 2104.
NOTE F: 2105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CALIBRATION (CONT)	
PER CALIBRATION (TRIPPING TIMES) TABLE. (CONT)	
MAXIMUM TEMPERATURE RISE (DEGREES CELSIUS)	1604
NO TRIPPING WHEN SUBJECTED TO TEST CURRENTS.	1606
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1608
PER DOCUMENT (DOC DES)	1610
TEST CURRENT (SELECT ONE)	
(PERCENT OF RATED)	1612
(AMPERES)	1614
(MILLIAMPERES)	1616
PER CALIBRATION TRIPPING TIMES TABLE.	1618
CONTACT RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1620

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1604	THE TEMPERATURE RISE SHALL BE NOT GREATER THAN 1604 DEGREES CELSIUS.
1606	THERE SHALL BE NO TRIPPING WHEN SUBJECTED TO TEST CURRENT(S).
1608	CALIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1608.
1610	CALIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1610.
1612	THE TEST CURRENT SHALL BE 1612 PERCENT OF THE RATED CURRENT.
1614	THE TEST CURRENT SHALL BE 1614 AMPERE(S).
1616	THE TEST CURRENT SHALL BE 1616 MILLIAMPERE(S).
1618	THE TEST CURRENT SHALL BE PER THE CALIBRATION (TRIPPING TIMES) TABLE.
1620	CONTACT RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1620.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT RESISTANCE (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	1622
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	1624
(MILLIOHMS)	1626
MAXIMUM VOLTAGE DROP (SELECT ONE)	
(VOLTS)	1628
(MILLIVOLTS)	1630
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1632
PER MIL-STD-202, METHOD 307.	1634
TEST CURRENT (SELECT ONE)	
MAXIMUM RATED CURRENT.	1636
(AMPERES)	1638
(MILLIAMPERES)	1640

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1622	CONTACT RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1624	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1624 OHMS.
1626	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1626 MILLIOHMS.
1628	THE VOLTAGE DROP SHALL BE NOT GREATER THAN 1628 VOLTS.
1630	THE VOLTAGE DROP SHALL BE NOT GREATER THAN 1630 MILLIVOLTS.
1632	CONTACT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1632.
1634	CONTACT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-202, METHOD 307.
1636	THE TEST CURRENT SHALL BE THE MAXIMUM RATED CURRENT FOR THE CONTACTS.
1638	THE TEST CURRENT SHALL BE 1638 AMPERE(S).
1640	THE TEST CURRENT SHALL BE 1640 MILLIAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 307. (CONT)	
MAXIMUM OPEN CIRCUIT TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	1642
(MILLIVOLTS, DC)	1644
(VOLTS, AC)	1646
(MILLIVOLTS, AC)	1648
NUMBER OF ACTIVATIONS PRIOR TO MEASUREMENT (QUANTITY)	1650
NUMBER OF TEST ACTIVATIONS (QUANTITY)	1652
NUMBER OF MEASUREMENTS PER ACTIVATION (QUANTITY)	1654
MAXIMIM MEASUREMENT ERROR (PERCENT)	1656
METHOD OF CONNECTION ____	1658
POINTS OF MEASUREMENT ____	1660

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1642	THE OPEN-CIRCUIT TEST VOLTAGE SHALL BE NOT GREATER THAN 1642 VOLTS, DC.
1644	THE OPEN-CIRCUIT TEST VOLTAGE SHALL BE NOT GREATER THAN 1644 MILLIVOLTS, DC.
1646	THE OPEN-CIRCUIT TEST VOLTAGE SHALL BE NOT GREATER THAN 1646 VOLTS, AC.
1648	THE OPEN-CIRCUIT TEST VOLTAGE SHALL BE NOT GREATER THAN 1648 MILLIVOLTS, AC.
1650	THERE SHALL BE 1650 ACTIVATION(S) PRIOR TO MEASUREMENT.
1652	THERE SHALL BE 1652 TEST ACTIVATION(S).
1654	THERE SHALL BE 1654 MEASUREMENT(S) PER ACTIVATION.
1656	THE MEASUREMENT ERROR SHALL BE NOT GREATER THAN 1656 PERCENT.
1658	THE METHOD OF CONNECTION SHALL BE 1658.
1660	THE POINT(S) OF MEASUREMENT SHALL BE 1660.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
COORDINATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1670
AS FOLLOWS:	1672
NO ELECTRICAL OR MECHANICAL MALFUNCTION.	1674
CIRCUIT BREAKER WITH HIGHER RATING SHALL NOT TRIP AND CIRCUIT BREAKER WITH LOWER RATING SHALL TRIP.	1676
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1678
PER DOCUMENT (DOC DES)	1680
OVERLOAD (PERCENT OF CURRENT RATING)	1682
CIRCUIT BREAKER RATINGS	
LOWER RATING (AMPERES)	1684
HIGHER RATING (AMPERES)	1686

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1670	COORDINATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1670.
1672	COORDINATION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1674	THERE SHALL BE NO ELECTRICAL OR MECHANICAL MALFUNCTION.
1676	THE CIRCUIT BREAKER WITH THE HIGHER RATING SHALL NOT TRIP AND THE CIRCUIT BREAKER WITH THE LOWER RATING SHALL TRIP.
1678	COORDINATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1678.
1680	COORDINATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1680.
1682	THE OVERLOAD SHALL BE 1682 PERCENT OF THE CURRENT RATING.
1684	THE CIRCUIT BREAKER WITH THE LOWER RATING SHALL BE RATED AT 1684 AMPERE(S).
1686	THE CIRCUIT BREAKER WITH THE HIGHER RATING SHALL BE RATED AT 1686 AMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4908
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4906
MAXIMUM LEAKAGE (MILLIAMPERES)	4894
REMAIN WITHIN SPECIFIED TOLERANCE.	4901
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4884
PER MIL-STD-202, METHOD 301.	6300
*ALTITUDE PER METHOD 105 OF MIL-STD-202	
*TEST CONDITION (LETTER)	4886
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4885
(VOLTS, AC)	4849

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4908	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4908.
4906	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4894	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4894 MILLIAMPERE(S).
4901	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4884	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4884.
6300	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.
4886	ALTITUDE SHALL BE IN ACCORDANCE WITH TEST CONDITION LETTER 4886 OF METHOD 105 OF MIL-STD-202.
4885	TEST VOLTAGE SHALL BE 4885 VOLTS, DC.
4849	TEST VOLTAGE SHALL BE 4849 VOLTS, AC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	6311
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	6312
BETWEEN MUTUALLY INSULATED PARTS.	6292
BETWEEN ALL INSULATED PARTS AND GROUND.	6293
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	6294
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4859
DURATION OF VOLTAGE APPLICATION (SECONDS)	4891
MOUNTING PER DOCUMENT (DOC DES)	6280
REGULATION OF TEST VOLTAGE (PERCENT)	6308
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4900

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
6311	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
6312	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
6292	BETWEEN MUTUALLY INSULATED PARTS.
6293	BETWEEN ALL INSULATED PARTS AND GROUND.
6294	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
4859	SPECIAL PREPARATION SHALL BE IN ACCORDANCE WITH 4859.
4891	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4891 SECOND(S).
6280	MOUNTING SHALL BE IN ACCORDANCE WITH 6280.
6308	REGULATION OF THE TEST VOLTAGE SHALL BE WITHIN 6308 PERCENT.
4900	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4900 KILOVOLTAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERSITIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4902
(MILLIAMPERES)	6310
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4874
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4856
MAXIMUM LEAKAGE (MILLIAMPERES)	4875
REMAIN WITHIN SPECIFIED TOLERANCE.	4847
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4861
PER MIL-STD-202, METHOD 301.	4862

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4902	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4902 AMPERE(S).
6310	THE SURGE CURRENT SHALL BE NOT GREATER THAN 6310 MILLIAMPERE(S).
4874	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.
4856	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4875	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4875 MILLIAMPERE(S).
4847	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4861	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861.
4862	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4854
(VOLTS, AC)	4855
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	4842
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	4848
BETWEEN MUTUALLY INSULATED PARTS.	4844
BETWEEN ALL INSULATED PARTS AND GROUND.	4845
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	4846
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4850
DURATION OF VOLTAGE APPLICATION (SECONDS)	4867
MOUNTING PER DOCUMENT (DOC DES)	5000
REGULATION OF TEST VOLTAGE (PERCENT)	4869
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4870

Source: https://assist.dla.mil Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4854	TEST VOLTAGE SHALL BE 4854 VOLTS, DC.
4855	TEST VOLTAGE SHALL BE 4855 VOLTS, AC.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
4842	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
4848	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
4844	BETWEEN MUTUALLY INSULATED PARTS.
4845	BETWEEN ALL INSULATED PARTS AND GROUND.
4846	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
4850	SPECIAL PREPARATION OR CONDITONS SHALL BE IN ACCORDANCE WITH 4850.
4867	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4867 SECOND(S).
5000	MOUNTING SHALL BE IN ACCORDANCE WITH 5000.
4869	REGULATION OF TEST VOLTAGE SHALL BE WITHIN 4869 PERCENT.
4870	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4870 KILOVOLTAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4717
(MILLIAMPERES)	4897
METHOD OF VOLTAGE CONNECTION PER DOCUMENT *(DOC DES)*	6267
ELECTROMAGNETIC INTERFERENCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1690
PER MIL-STD-461 LIMITS.	1692
NO ELECTRICAL OR MECHANICAL MALFUNCTION.	1694
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1696
PER MIL-STD-461, APPENDIX METHOD (DESIGNATION)	1698
PER MIL-STD-462.	1700

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4717 THE SURGE CURRENT SHALL BE NOT GREATER THAN 4717 AMPERE(S).

4897 THE SURGE CURRENT SHALL BE NOT GREATER THAN 4897 MILLIAMPERE(S).

6267 METHOD OF CONNECTION OF TEST VOLTAGE SHALL BE IN ACCORDANCE WITH 6267.

1690 ELECTROMAGNETIC INTERFERENCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1690.

1692 ELECTROMAGNETIC INTERFERENCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE LIMITS PER MIL-STD-461.

1694 THERE SHALL BE NO ELECTRICAL OR MECHANICAL MALFUNCTION.

1696 ELECTROMAGNETIC INTERFERENCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1696.

1698 ELECTROMAGNETIC INTERFERENCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE MIL-STD-461 APPENDIX. METHOD 1698 SHALL APPLY.

1700 ELECTROMAGNETIC INTERFERENCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-462. THE FOLLOWING METHOD(S) SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELECTROMAGNETIC INTERFERENCE (CONT)	
PER MIL-STD-462. (CONT)	
*TEST METHODS	
CE (NUMBER)	1702
RE (NUMBER)	1704
CS (NUMBER)	1706
RS (NUMBER)	1708
CRE (NUMBER)	1710
ENDURANCE, ELECTRICAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1712
AS FOLLOWS:	1714
NO MECHANICAL OR ELECTRICAL FAILURE.	1716
NO WELDING OF CONTACTS.	1718
MINIMUM TERMINAL TEMPERATURE RISE (DEGREES CELSIUS)	1720
MINIMUM INSULATION RESISTANCE (MEGOHMS)	1722
NO EVIDENCE OF DAMAGE.	1724

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1702	METHOD CE 1702.
1704	METHOD RE 1704.
1706	METHOD CS 1706.
1708	METHOD RS 1708.
1710	METHOD CRE 1710.
1712	ENDURANCE, ELECTRICAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1712.
1714	ENDURANCE, ELECTRICAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1716	THERE SHALL BE NO MECHANICAL OR ELECTRICAL FAILURE.
1718	THERE SHALL BE NO WELDING OF CONTACTS.
1720	THE TEMPERATURE RISE OF THE TERMINALS SHALL BE NOT GREATER THAN 1720 DEGREES CELSIUS.
1722	THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 1722 MEGOHMS.
1724	THERE SHALL BE NO EVIDENCE OF DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE, ELECTRICAL (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	1726
(MILLIOHMS)	1728
MAXIMIM CONTACT VOLTAGE DROP (SELECT ONE)	
(VOLTS)	1730
(MILLIVOLTS)	1732
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1734
PER DOCUMENT (DOC DES)	1736
TEST TEMPERATURE (DEGREES CELSIUS)	1738
TEST ALTITUDE (SELECT ONE)	
AS SPECIFIED HEREIN.	1740
(FEET)	1742
(METERS)	1744

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1726	CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1726 OHM(S).
1728	CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1728 MILLIOHMS.
1730	CONTACT VOLTAGE DROP SHALL BE NOT GREATER THAN 1730 VOLT(S).
1732	CONTACT VOLTAGE DROP SHALL BE NOT GREATER THAN 1732 MILLIVOLTS.
1734	ENDURANCE, ELECTRICAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1734.
1736	ENDURANCE, ELECTRICAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1736.
1738	THE TEST TEMPERATURE SHALL BE 1738 DEGREES CELSIUS.
1740	THE TEST ALTITUDE SHALL BE AS SPECIFIED HEREIN.
1742	THE TEST ALTITUDE SHALL BE 1742 FEET.
1744	THE TEST ALTITUDE SHALL BE 1744 METERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE, ELECTRICAL (CONT)	
PER DOCUMENT (CONT)	
MINIMUM NUMBER OF TEST CYCLES (QUANTITY)	1746
MINIMUM NUMBER OF TEST CYCLES AT EACH CONTACT LOAD RATING (QUANTITY)	1748
TEST LOAD ____	1750
ENDURANCE, MECHANICAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1752
AS FOLLOWS:	1754
REMAIN MECHANICALLY AND ELECTRICALLY OPERATIVE.	1756
EACH SET OF CONTACTS SHALL OPEN AND CLOSE ITS INDIVIDUAL CIRCUIT IN PROPER SEQUENCE.	1758
REMAIN WITHIN SPECIFIED TOLERANCES.	1760
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1770

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1746	THERE SHALL BE NOT LESS THAN 1746 TEST CYCLES.
1748	THERE SHALL BE NOT LESS THAN 1748 TEST CYCLES AT EACH CONTACT LOAD RATING.
1750	THE TEST LOAD SHALL BE 1750.
1752	ENDURANCE, MECHANICAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1752.
1754	ENDURANCE, MECHANICAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1756	THE ITEM(S) SHALL REMAIN MECHANICALLY AND ELECTRICALLY OPERATIVE.
1758	EACH SET OF CONTACTS SHALL OPEN AND CLOSE ITS INDIVIDUAL CIRCUIT IN PROPER SEQUENCE.
1760	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE(S).
1770	ENDURANCE, MECHANICAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1770.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE, MECHANICAL (CONT)	
TEST METHODS (CONT)	
PER DOCUMENT (DOC DES)	1772
TEST CYCLES (SELECT ONE)	
(QUANTITY)	1774
(TIMES SPECIFIED MINIMUM ELECTRICAL ENDURANCE CYCLES)	1776
CONTACT LOAD VOLTAGE (SELECT ONE)	
(PERCENT OF SPECIFIED)	1778
(VOLTS, AC)	1780
(VOLTS, DC)	1782
CONTACT LOAD CURRENT (SELECT ONE)	
(PERCENT OF RATED)	1784
LOAD TYPE (TYPE)	1786
(AMPERES)	1788
EXPLOSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1800

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1772	ENDURANCE, MECHANICAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1772.
1774	THERE SHALL BE 1774 TEST CYCLES.
1776	THE NUMBER OF TEST CYCLES SHALL BE 1776 TIMES THE SPECIFIED MINIMUM NUMBER OF ELECTRICAL ENDURANCE CYCLES.
1778	THE CONTACT LOAD VOLTAGE SHALL BE 1778 PERCENT OF THE SPECIFIED LOAD VOLTAGE.
1780	THE CONTACT LOAD VOLTAGE SHALL BE 1780 VOLTS, AC.
1782	THE CONTACT LOAD VOLTAGE SHALL BE 1782 VOLTS, DC.
1784	THE CONTACT LOAD CURRENT SHALL BE 1784 PERCENT OF THE RATED LOAD CURRENT.
1786	THE LOAD TYPE SHALL BE 1786.
1788	THE CONTACT LOAD CURRENT SHALL BE 1788 AMPERE(S).
1800	EXPLOSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1800.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
EXPLOSION (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	1802
REMAIN ELECTRICALLY AND MECHANICALLY OPERATIVE.	1804
NO EXPLOSION WITHIN CIRCUIT BREAKER OR CHAMBER.	1806
NO EXPLOSION IN CHAMBER WHETHER OR NOT EXPLOSION OCCURS IN CIRCUIT BREAKER.	1808
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1810
PER MIL-STD-202, METHOD 109.	1812
LOAD (PERCENT OF RATED LOAD)	1814
LOAD (TYPE)	1816
CHAMBER TEMPERATURE (DEGREES CELSIUS)	1818
TEST VOLTAGE (SELECT ONE)	
(VOLTS, AC)	1820
FREQUENCY (HERTZ)	1822
(VOLTS, DC)	1824

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1802	EXPLOSION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1804	THE ITEM(S) SHALL REMAIN ELECTRICALLY AND MECHANICALLY OPERATIVE.
1806	THERE SHALL BE NO EXPLOSION WITHIN THE CIRCUIT BREAKER OR CHAMBER.
1808	THERE SHALL BE NO EXPLOSION IN THE CHAMBER WHETHER OR NOT AN EXPLOSION OCCURS IN THE CIRCUIT BREAKER.
1810	EXPLOSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1810.
1812	EXPLOSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-202, METHOD 109.
1814	THE LOAD SHALL BE 1814 PERCENT OF THE RATED LOAD.
1816	THE LOAD TYPE SHALL BE 1816.
1818	THE CHAMBER TEMPERATURE SHALL BE 1818 DEGREES CELSIUS.
1820	THE TEST VOLTAGE SHALL BE 1820 VOLTS AC.
1822	THE AC VOLTAGE FREQUENCY SHALL BE 1822 HERTZ.
1824	THE TEST VOLTAGE SHALL BE 1824 VOLTS DC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4760
FUNGUS RESISTANT BY CERTIFICATION OR BY TEST.	4761
NO EVIDENCE OF FUNGUS GROWTH WHEN TESTED.	4762
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4754
PER MIL-STD-810, METHOD 508.	4755
TEST PERIOD (DAYS)	4756
PER MIL-F-13927.	2500
CLASS (SELECT ONE)	
1.	2502
2.	2504
3.	2506

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4760	FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.
4761	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED, THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4762	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4754	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.
4755	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.
4756	TEST PERIOD SHALL BE 4756 DAY(S).
2500	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-13927.
2502	SPECIMENS SHALL BE CLASSIFIED CLASS 1.
2504	SPECIMENS SHALL BE CLASSIFIED CLASS 2.
2506	SPECIMENS SHALL BE CLASSIFIED CLASS 3.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FUNGUS (CONT)	
PER MIL-F-13927. (CONT)	
TEST METHOD (SELECT ONE)	
A.	2508
B.	2510
HOLD-IN CAPACITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1826
AS FOLLOWS:	1828
EXPLOSIVE MIXTURE SHALL NOT IGNITE.	1830
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1832
PER MIL-C-7079.	1834
TEST CURRENT (SELECT ONE)	
(PERCENT OF RATED)	1836
(AMPERES)	1838

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2508	TEST METHOD A SHALL APPLY.
2510	TEST METHOD B SHALL APPLY.
1826	HOLD-IN CAPACITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1826.
1828	HOLD-IN CAPACITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1830	THE EXPLOSIVE MIXTURE SHALL NOT IGNITE.
1832	HOLD-IN CAPACITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1832.
1834	HOLD-IN CAPACITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-7079.
1836	THE TEST CURRENT SHALL BE 1836 PERCENT OF THE RATED CURRENT.
1838	THE TEST CURRENT SHALL BE 1838 AMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4798
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	4799
NO DEGRADATION OF PERFORMANCE.	4815
REMAIN WITHIN SPECIFIED TOLERANCE.	4791
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1477
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	4795
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	4805
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	4813
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	4803

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4798	HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.
4799	HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
4815	THERE SHALL BE NO DEGRADATION OF PERFORMANCE.
4791	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1477	THERE SHALL BE NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DIELECTRIC WITHSTANDING VOLTAGE IS PERFORMED.
4795	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4795 MEGOHM(S) AT HIGH HUMIDITY.
4805	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4805 MEGOHM(S) AFTER DRYING.
4813	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4813 MILLIAMPERE(S) AT HIGH HUMIDITY.
4803	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4803 MILLIAMPERE(S) AFTER DRYING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4788
PER MIL-STD-202, METHOD 103.	4853
*TEST CONDITION (LETTER)	4890
POLARIZING VOLTAGE (VOLTS, DC)	4793
DURATION OF POLARIZING VOLTAGE APPLICATION (HOURS)	4790
POINTS OF APPLICATION OF POLARIZING VOLTAGE:	
BETWEEN MUTUALLY INSULATED PARTS.	4969
BETWEEN ALL INSULATED PARTS AND GROUND.	4970
BETWEEN CURRENT CARRYING PARTS AND CASE.	4971
BETWEEN CURRENT CARRYING PARTS AND GROUND.	6202
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	6207
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	6206

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4788	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.
4853	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 103 OF MIL-STD-202.
4890	TEST CONDITION LETTER 4890 SHALL APPLY.
4793	MAGNITUDE OF THE POLARIZING VOLTAGE SHALL BE 4793 VOLTS, DC.
4790	DURATION OF APPLICATION OF VOLTAGE SHALL BE 4790 HOUR(S).
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
4969	BETWEEN MUTUALLY INSULATED PARTS.
4970	BETWEEN ALL INSULATED PARTS AND GROUND.
4971	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
6202	BETWEEN CURRENT CARRYING PARTS AND GROUND.
6207	DIELECTRIC WITHSTANDING VOLTAGE TEST SHALL BE PERFORMED AT HIGH HUMIDITY.
6206	DIELECTRIC WITHSTANDING VOLTAGE TEST SHALL BE PERFORMED AFTER DRYING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMMERSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4819
NO EVIDENCE OF PHYSICAL DAMAGE.	4820
REMAIN WITHIN SPECIFIED TOLERANCE.	4822
MINIMUM INSULATION RESISTANCE (MEGOHMS)	4825
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4809
PER MIL-STD-202, METHOD 104.	4810
*TEST CONDITION (LETTER)	4811
MEASUREMENTS AFTER FINAL CYCLE (HOURS)	4812
TIME BEFORE MEASUREMENTS AFTER FINAL CYCLE (HOURS)	4814
INCLINATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1840
AS FOLLOWS:	1842

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the currenversion before use.

CHAR CODE	STANDARD PARAGRAPH
4819	IMMERSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4819.
4820	IMMERSION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4822	ITEM(S) SHALL REMAIN WITH SPECIFIED TOLERANCE.
4825	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 4825 MEGOHM(S).
4809	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4809.
4810	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 104 OF MIL-STD-202.
4811	TEST CONDITION LETTER 4811 SHALL APPLY.
4812	FINAL MEASUREMENT(S) SHALL BE MADE WITHIN 4812 HOUR(S) AFTER FINAL CYCLE.
4814	MEASUREMENTS SHALL BE NOT MADE UNITL 4814 HOUR(S) AFTER THE FINAL CYCLE.
1840	INCLINATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1840.
1842	INCLINATION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INCLINATION (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM VARIATION IN CALIBRATION (PERCENT)	1844
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1846
PER DOCUMENT (DOC DES)	1848
INCLINATION FROM HORIZONTAL OR VERTICAL (DEGREES)	1850
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1380
AS FOLLOWS:	6359
*MINIMUM INSULATION RESISTANCE (SELECT ONE)	
SINGLE TEST	
(MEGOHMS)	1386

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1844	THE VARIATION IN CALIBRATION SHALL BE NOT GREATER THAN 1844 PERCENT.
1846	INCLINATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1846.
1848	INCLINATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1848.
1850	THE INCLINATION SHALL BE 1850 DEGREES FROM THE HORIZONTAL OR VERTICAL.
1380	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.
6359	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1386	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 1386 MEGOHM(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
MINIMUM INSULATION RESISTANCE (CONT)	
MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	1384
*SECOND TEST (MEGOHMS)	1387
REMAIN WITHIN SPECIFIED TOLERANCE.	1388
NO EVIDENCE OF PHYSICAL DAMAGE.	1407
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1371
PER MIL-STD-202, METHOD 302.	1511
*CONDITION (SELECT ONE)	
TEST CONDITION (LETTER)	1378
TEST VOLTAGE (VOLTS, DC)	1373
ELECTRIFICATION TIME (SECONDS)	1376
MAXIMUM MEASUREMENT ERROR AT REQUIRED VALUE (PERCENT)	1377

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1384	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1384 MEGOHM(S) AT THE FIRST TEST TEMPERATURE.
1387	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1387 MEGOHM(S) AT THE SECOND TEST TEMPERATURE.
1388	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1407	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1371	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.
1511	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 302 OF MIL-STD-202.
1378	TEST CONDITION LETTER 1378 SHALL APPLY.
1373	TEST POTENTIAL SHALL BE 1373 VOLTS, DC.
1376	ELECTRIFICATION DURATION SHALL BE 1376 SECOND(S).
1377	THE MEASUREMENT ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1377 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 302. (CONT)	
POINTS OF APPLICATION OF TEST VOLTAGE:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	1497
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	1498
BETWEEN MUTUALLY INSULATED PARTS.	1522
BETWEEN INSULATED PARTS AND GROUND.	1523
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	1524
SPECIAL PREPARATIONS OR CONDITIONS PER DOCUMENT (DOC DES)	1520
FIRST TEST TEMPERATURE (DEGREES CELSIUS)	1372
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	1381
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1383

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
1497	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
1498	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
1522	BETWEEN MUTUALLY INSULATED PARTS.
1523	BETWEEN ALL INSULATED PARTS AND GROUND.
1524	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
1520	SPECIAL PREPARATIONS OR CONDITIONS SHALL BE IN ACCORDANCE WITH 1520.
1372	FIRST TEST TEMPERATURE SHALL BE 1372 DEGREES CELSIUS.
1381	SECOND TEST TEMPERATURE SHALL BE 1381 DEGREES CELSIUS.
1383	TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1383 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INTERRUPTING CAPACITY (RUPTURE CAPACITY, SHORT CIRCUIT)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1852
AS FOLLOWS:	1854
PER INTERRUPTING CAPACITY TABLE.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1852 INTERRUPTING CAPACITY (RUPTURE CAPACITY, SHORT CIRCUIT). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1852.

1854 INTERRUPTING CAPACITY (RUPTURE CAPACITY, SHORT CIRCUIT). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

INTERRUPTING CAPACITY TABLE

AMPERES	VOLTS DC	VOLTS AC	FREQUENCY (HZ)
2200	2201	2202	2203
2204	2205	2206	2207
2208	2209	2210	2211
2212	2213	2214	2215
2216	2217	2218	2219
2220	2221	2222	2223
2224	2225	2226	2227
2228	2229	2230	2231
2232	2233	2234	2235
2236	2237	2238	2239

NOTE A: 2240.
NOTE B: 2241.
NOTE C: 2242.
NOTE D: 2243.
NOTE E: 2244.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INTERRUPTING CAPACITY (RUPTURE CAPACITY, SHORT CIRCUIT) (CONT)	
TEST METHODS (SELECT ONE)	1860
PER DOCUMENT (DOC DES)	1862
MOISTURE RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1400
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	1396
REMAIN WITHIN SPECIFIED TOLERANCE.	1398
NO EVIDENCE OR ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1394
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	1429
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	1404
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	1432
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	1406

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1860	INTERRUPTING CAPACITY (RUPTURE CAPACITY, SHORT CIRCUIT). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1860.
1862	INTERRUPTING CAPACITY (RUPTURE CAPACITY, SHORT CIRCUIT). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1862.
1400	MOISTURE RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1400.
1396	MOISTURE RESISTANCE. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
1398	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1394	THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING OR INSULATION BREAKDOWN, WHEN DIELECTRIC WITHSTANDING VOLTAGE IS APPLIED.
1429	CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1429 MILLIAMPERE(S) AT HIGH HUMIDITY.
1404	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1404 MILLIAMPERE(S) AFTER DRYING.
1432	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1432 MEGOHM(S) AT HIGH HUMIDITY.
1406	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1406 MEGOHM(S) AFTER DRYING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE (CONT)	
. TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1391
PER MIL-STD-202, METHOD 106.	1397
POLARIZING VOLTAGE (VOLTS, DC)	1395
LOADING VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4981
(VOLTS, AC)	4980
PERCENT OF SAMPLE SUBJECTED TO POLARIZING VOLTAGE (PERCENT)	4991
STEP 7A NOT APPLICABLE.	4985
STEP 7B NOT APPLICABLE.	4986
MOUNT PER DOCUMENT (DOC DES)	1449
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	4983
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	4984

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1391	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1391.
1397	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 106 OF MIL-STD-202.
1395	POLARIZING VOLTAGE SHALL BE 1395 VOLTS, DC.
4981	LOADING VOLTAGE SHALL BE 4981 VOLTS, DC.
4980	LOADING VOLTAGE SHALL BE 4980 VOLTS, AC.
4991	4991 PERCENT OF THE SAMPLE SHALL BE SUBJECTED TO THE POLARIZING VOLTAGE.
4985	STEP 7A OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
4986	STEP 7B OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
1449	MOUNTING SHALL BE IN ACCORDANCE WITH 1449.
4983	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.
4984	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OPERATING FORCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1864
AS FOLLOWS:	1866
ACTUATING FORCE (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	1868
(POUNDS)	1870
SI	
(NEWTONS)	1872
NO SHORT CIRCUIT IN CIRCUIT BREAKERS.	1874
NO EVIDENCE OF PHYSICAL DAMAGE.	1876
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1878
PER DOCUMENT (DOC DES)	1880
TEST FORCE (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	1882
(POUNDS)	1884

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1864	OPERATING FORCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1864.
1866	OPERATING FORCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1868	THE ACTUATING FORCE SHALL BE 1868 OUNCE(S).
1870	THE ACTUATING FORCE SHALL BE 1870 POUND(S).
1872	THE ACTUATING FORCE SHALL BE 1872 NEWTON(S).
1874	THERE SHALL BE NO SHORT CIRCUIT IN THE CIRCUIT BREAKER(S).
1876	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1878	OPERATING FORCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1878.
1880	OPERATING FORCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1880.
1882	THE TEST FORCE SHALL BE 1882 OUNCE(S).
1884	THE TEST FORCE SHALL BE 1884 POUND(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OPERATING FORCE (CONT)	
TEST FORCE (CONT)	
SI	
(NEWTONS)	1886
NUMBER OF ACTUATIONS (QUANTITY)	1888
OVERLOAD	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1890
AS FOLLOWS:	1892
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	1894
(MILLIOHMS)	1896
MAXIMUM VOLTAGE DROP ACROSS CLOSED CONTACTS (SELECT ONE)	
(VOLTS)	1898
(MILLIVOLTS)	1900
PERCENT OF APPLIED LOAD VOLTAGE (PERCENT)	1902

Source: https://assist.dla.mil Downloaded: 2026-04-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1886	THE TEST FORCE SHALL BE 1886 NEWTON(S).
1888	THERE SHALL BE 1888 ACTUATION(S).
1890	OVERLOAD. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1890.
1892	OVERLOAD. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1894	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1894 OHM(S).
1896	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1896 MILLIOHMS.
1898	THE VOLTAGE DROP ACROSS CLOSED CONTACTS SHALL BE NOT GREATER THAN 1898 VOLT(S).
1900	THE VOLTAGE DROP ACROSS CLOSED CONTACTS SHALL BE NOT GREATER THAN 1900 MILLIVOLTS.
1902	THE VOLTAGE DROP ACROSS CLOSED CONTACTS SHALL BE NOT GREATER THAN 1902 PERCENT OF THE APPLIED LOAD VOLTAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OVERLOAD (CONT)	
AS FOLLOWS: (CONT)	
MINIMUM VOLTAGE ACROSS OPEN CONTACTS	
(PERCENT OF APPLIED LOAD VOLTAGE)	1904
REMAIN MECHANICALLY AND ELECTRICALLY OPERATIVE.	1906
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1910
PER DOCUMENT (DOC DES)	1912
NUMBER OF OPERATIONS (QUANTITY)	1914
OVERLOAD CURRENT (SELECT ONE)	
(AMPERES)	1916
(PERCENT OF RATED LOAD)	1918
CYCLING RATE (CYCLES PER MINUTE)	1920
RECLOSING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1922

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1904	THE VOLTAGE ACROSS THE OPEN CONTACTS SHALL BE NOT LESS THAN 1904 PERCENT OF THE APPLIED LOAD VOLTAGE.
1906	THE ITEM(S) SHALL REMAIN MECHANICALLY AND ELECTRICALLY OPERATIVE.
1910	OVERLOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1910.
1912	OVERLOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1912.
1914	THERE SHALL BE 1914 OPERATIONS.
1916	THE OVERLOAD CURRENT SHALL BE 1916 AMPERE(S).
1918	THE OVERLOAD CURRENT SHALL BE 1918 PERCENT OF THE RATED LOAD.
1920	THE CYCLING RATE SHALL BE 1920 CYCLES PER MINUTE.
1922	RECLOSING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1922.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RECLOSING (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	1924
REMAIN OPEN AFTER BEING TRIPPED.	1926
NO CONTINUITY BETWEEN TRIPPED CONTACTS.	1928
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1930
PER DOCUMENT (DOC DES)	1932
TEST TEMPERATURE (DEGREES CELSIUS)	1934
RESISTANCE TO SOLDERING HEAT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4700
NO EVIDENCE OF PHYSICAL DAMAGE.	4701
REMAIN WITHIN SPECIFIED TOLERANCE.	4718
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4689

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1924	RECLOSING. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1926	THE CIRCUIT BREAKER(S) SHALL REMAIN OPEN AFTER BEING TRIPPED.
1928	THERE SHALL BE NO CONTINUITY BETWEEN TRIPPED CONTACTS.
1930	RECLOSING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1930.
1932	RECLOSING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1932.
1934	THE TEST TEMPERATURE SHALL BE 1934 DEGREES CELSIUS.
4700	RESISTANCE TO SOLDERING HEAT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4700.
4701	RESISTANCE TO SOLDERING HEAT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4718	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4689	RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4689.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO SOLDERING HEAT (CONT)	
TEST METHODS (CONT)	
PER MILL-STD-202, METHOD 210.	4698
*TEST CONDITION (LETTER)	4691
NUMBER OF TERMINATIONS TESTED (QUANTITY)	4694
DEPTH OF IMMERSION IN SOLDER	
(INCHES)	4692
(MILLIMETERS)	4669
IMMERSION IN FLUX PERMITTED.	4671
SPECIAL PREPARATIONS PERMITTED.	4989
COOLING TIME (MINUTES)	4695
SALT SPRAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4878
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE.	4782

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4698	RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 210 OF MIL-STD-202.
4691	TEST CONDITION LETTER 4691 SHALL APPLY.
4694	4694 TERMINATION(S) PER UNIT SHALL BE TESTED.
4692	DEPTH OF IMMERSION IN SOLDER SHALL BE 4692 INCH(S).
4669	DEPTH OF IMMERSION IN SOLDER SHALL BE 4669 MILLIMETER(S).
4671	IMMERSION OF TERMINATIONS IN FLUX SHALL BE PERMITTED.
4989	SPECIAL PREPARATION SHALL BE PERMITTED.
4695	COOLING TIME SHALL BE 4695 MINUTES PRIOR TO FINAL EXAMINATION AND MEASUREMENTS.
4878	SALT SPRAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4878.
4782	SALT SPRAY. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT SPRAY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4770
PER MIL-STD-202, METHOD 101.	4771
*TEST CONDITION (LETTER)	4772
MOUNTING (SELECT ONE)	
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4773
MOUNTING SHALL BE BY NORMAL METHOD.	4765
MOUNTING SHALL BE BY ANY SUITABLE METHOD.	4766
SAND AND DUST	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4958
NO EVIDENCE OF DUST PENETRATION.	4959
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4952

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
4770	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4770.
4771	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 101 OF MIL-STD-202.
4772	TEST CONDITION LETTER 4772 SHALL APPLY.
4773	MOUNTING SHALL BE IN ACCORDANCE WITH 4773.
4765	MOUNTING SHALL BE BY THE NORMAL METHOD.
4766	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4958	SAND AND DUST. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4958.
4959	SAND AND DUST. THERE SHALL BE NO EVIDENCE OF DUST PENETRATION.
4952	SAND AND DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4952.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SAND AND DUST (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 110.	4960
TEST SPECIMENS SHALL BE OPERATED DURING TEST STEPS (NUMBER)	4872
*DURATION OF OPERATION (HOURS)	6299
SPECIMEN ORIENTATION SHALL BE CHANGED DURING TEST.	1539
SECOND 6-HOUR TEST REQUIRED IMMEDIATELY FOLLOWING TEMPERATURE STABILIZATION IN STEP 2.	4956
SEAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4745
AS FOLLOWS:	6370
SPECIFIED TEST METHOD SENSITIVITY.	4746
NO BUBBLES INDICATIVE OF LEAKAGE.	4748
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4734

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4960	SAND AND DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 110 OF MIL-STD-202.
4872	ITEM(S) SHALL BE OPERATED DURING STEP(S) 4872.
6299	DURATION OF OPERATION SHALL BE 6299 HOUR(S).
1539	ORIENTATION SHALL BE CHANGED DURING THE TEST.
4956	THE SECOND 6-HOUR TEST SHALL BE PERFORMED IMMEDIATELY AFTER REACHING TEMPERATURE STABILIZATION IN STEP 2.
4745	SEAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4745.
6370	SEAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
4746	THE REQUIREMENTS SHALL BE IN ACCORDANCE WITH THE SPECIFIED TEST METHOD SENSITIVITY.
4748	THERE SHALL BE NO BUBBLES INDICATIVE OF LEAKAGE.
4734	SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4734.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 112.	4732
*TEST CONDITION LETTER	
LETTER A.	4737
LIQUID FOR BATH (NAME)	4738
MINIMUM BATH TEMPERATURE (DEGREES CELSIUS)	4739
LETTER B.	6320
LIQUID FOR BATH (NAME)	6321
MINIMUM BATH TEMPERATURE (DEGREES CELSIUS)	6322
LETTER C.	6323
*LEAK RATE SENSITIVITY (ATM CC/SEC)	4741
*TEST PROCEDURE (SELECT ONE)	
TEST PROCEDURE I.	4740
VACUUM PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	4742
(KILOPASCALS)	4736

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4732	SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 112 OF MIL-STD-202.
4737	TEST CONDITION LETTER A SHALL APPLY.
4738	LIQUID FOR BUBBLE BATH SHALL BE 4738.
4739	TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 4739 DEGREES CELSIUS.
6320	TEST CONDITION LETTER B SHALL APPLY.
6321	LIQUID FOR BUBBLE TEST BATH SHALL BE 6321.
6322	TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 6322 DEGREES CELSIUS.
6323	TEST CONDITION LETTER C SHALL APPLY.
4741	LEAK SENSITIVITY RATE SHALL BE 4741 ATM CC/SEC.
4740	PROCEDURE NUMBER I SHALL APPLY.
4742	VACUUM PRESSURE SHALL BE 4742 POUNDS PER SQUARE INCH.
4736	VACUUM PRESSURE SHALL BE 4736 KILOPASCALS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
TEST PROCEDURE (CONT)	
TEST PROCEDURE II.	6324
BACKFILL PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	6325
(KILOPASCALS)	6326
NUMBER OF PRESSURE CYCLES (QUANTITY)	4749
TEST PROCEDURE III.	6328
GROSS LEAK TEST CONDITION (LETTER)	4750
TEST PROCEDURE IV.	6329
CHAMBER PRESSURE (SELECT ONE)	
(TORR)	4751
(KILOPASCALS)	4735
DURATION OF REDUCED PRESSURE (MINUTES)	4752
GROSS LEAK TEST CONDITION (LETTER)	6330
LETTER D.	6331
ANY SUITABLE MOUNTING FIXTURE.	4743

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6324	PROCEDURE NUMBER II SHALL APPLY.
6325	BACKFILL PRESSURE SHALL BE 6325 POUNDS PER SQUARE INCH.
6326	BACKFILL PRESSURE SHALL BE 6326 KILOPASCALS.
4749	THERE SHALL BE 4749 PRESSURE CYCLE(S).
6328	PROCEDURE NUMBER III SHALL APPLY.
4750	GROSS LEAK TEST CONDITION LETTER 4750 SHALL APPLY.
6329	PROCEDURE NUMBER IV SHALL APPLY.
4751	CHAMBER PRESSURE SHALL BE 4751 TORR.
4735	CHAMBER PRESSURE SHALL BE 4735 KILOPASCALS.
4752	DURATION AT LOW PRESSURE SHALL BE 4752 MINUTE(S).
6330	GROSS LEAK TEST CONDITION LETTER 6330 SHALL APPLY.
6331	TEST CONDITION LETTER D SHALL APPLY.
4743	MOUNTING SHALL BE BY ANY SUITABLE METHOD.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
TEST CONDITION LETTER (CONT)	
LETTER E.	6332
ANY SUITABLE MOUNTING FIXTURE.	6333
SHOCK, HIGH IMPACT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1494
NO EVIDENCE OF PHYSICAL DAMAGE.	1495
REMAIN WITHIN SPECIFIED TOLERANCE.	1464
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY DURING TEST.	1451
MAXIMUM DISCONTINUITY (SELECT ONE)	
(MICROSECONDS)	2520
(MILLISECONDS)	2522
NO LAMP IN TEST CIRCUIT SHALL LIGHT.	1550
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1486

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6332	TEST CONDITION LETTER E SHALL APPLY.
6333	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
1494	SHOCK, HIGH IMPACT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1494.
1495	SHOCK, HIGH IMPACT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1464	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1451	THERE SHALL BE NO DISCONTINUITY DURING THE TEST.
2520	DISCONTINUITY SHALL BE NOT GREATER THAN 2520 MICROSECOND(S).
2522	DISCONTINUITY SHALL BE NOT GREATER THAN 2522 MILLISECOND(S).
1550	NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.
1486	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1486.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, HIGH IMPACT (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 207.	1482
*MOUNTING FIXTURE (SELECT ONE)	
FIGURE NUMBER FROM METHOD 207 OF MIL-STD-202 (NUMBER)	1488
ANY SUITABLE MOUNTING FIXTURE.	1478
MOUNTING FIXTURE PER DOCUMENT (DOC DES)	1468
MONITOR CONTACT CHATTER PER METHOD 310 OF MIL-STD-202.	
*TEST CIRCUIT (LETTER)	1487
*TEST CONDITION (LETTER)	1479
PERCENT RATED LOAD APPLIED (PERCENT)	6203
PER MIL-S-901.	4132
EQUIPMENT GRADE (LETTER)	4133

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
1482	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 207 OF MIL-STD-202.
1488	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH FIGURE 1488 OF METHOD 207 OF MIL-STD-202.
1478	THE MOUNTING FIXTURE SHALL BE ANY SUITABLE MOUNTING FIXTURE.
1468	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH 1468.
1487	MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1487 SHALL APPLY.
1479	TEST CONDITION LETTER 1479 OF METHOD 310 OF MIL-STD-202 SHALL APPLY.
6203	THE ELECTRICAL LOAD SHALL BE 6203 PERCENT OF THE RATED LOAD.
4132	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-901.
4133	THE EQUIPMENT GRADE SHALL BE 4133.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, HIGH IMPACT (CONT)	
PER MIL-S-901. (CONT)	
EQUIPMENT CLASSIFICATION (SELECT ONE)	
DECK MOUNTED.	4135
SHELL MOUNTED.	4136
HULL MOUNTED.	4134
SUBSIDIARY COMPONENT.	4138
SUBASSEMBLIES.	4139
PRINCIPAL UNIT.	4137
TEST CLASSIFICATION (SELECT ONE)	
LIGHTWEIGHT.	4143
MEDIUMWEIGHT.	4144
TEST TYPE (LETTER)	4146
METHOD OF MOUNTING (FIXTURE)	4147
EQUIPMENT CLASS (NUMERAL)	4142
SHOCK, SPECIFIED PULSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1508

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4135	THE EQUIPMENT CLASSIFICATION SHALL BE DECK MOUNTED.
4136	THE EQUIPMENT CLASSIFICATION SHALL BE SHELL MOUNTED.
4134	THE EQUIPMENT CLASSIFICATION SHALL BE HULL MOUNTED.
4138	THE EQUIPMENT CLASSIFICATION SHALL BE SUBSIDIARY COMPONENT.
4139	THE EQUIPMENT CLASSIFICATION SHALL BE SUBASSEMBLIES.
4137	THE EQUIPMENT CLASSIFICATION SHALL BE PRINCIPAL UNIT.
4143	THE TEST CLASSIFICATION SHALL BE LIGHTWEIGHT.
4144	THE TEST CLASSIFICATION SHALL BE MEDIUMWEIGHT.
4146	THE TEST TYPE SHALL BE 4146.
4147	THE METHOD OF MOUNTING SHALL BE IN ACCORDANCE WITH FIXTURE 4147.
4142	THE EQUIPMENT CLASS SHALL BE 4142.
1508	SHOCK, SPECIFIED PULSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1508.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, SPECIFIED PULSE (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE.	1509
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY DURING TEST.	1471
MAXIMUM DISCONTINUITY (SELECT ONE)	
(MICROSECONDS)	2530
(MILLISECONDS)	2532
NO LAMP IN TEST CIRCUIT SHALL LIGHT.	1551
REMAIN WITHIN SPECIFIED TOLERANCE.	4703
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1502
PER MIL-STD-202, METHOD 213.	1500
*TEST CONDITION (LETTER)	1504
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	4686
NORMAL MOUNTING MEANS.	4685
MOUNT PER DOCUMENT (DOC DES)	4684

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1509	SHOCK, SPECIFIED PULSE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1471	THERE SHALL BE NO DISCONTINUITY DURING THE TEST.
2530	DISCONTINUITY SHALL BE NOT GREATER THAN 2530 MICROSECOND(S).
2532	DISCONTINUITY SHALL BE NOT GREATER THAN 2532 MILLISECOND(S).
1551	NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.
4703	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1502	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1502.
1500	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 213 OF MIL-STD-202.
1504	TEST CONDITION LETTER 1504 SHALL APPLY.
4686	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4685	MOUNTING SHALL BE BY THE NORMAL METHOD.
4684	MOUNTING SHALL BE IN ACCORDANCE WITH 4684.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, SPECIFIED PULSE (CONT)	
PER MIL-STD-202, METHOD 213. (CONT)	
MONITOR CONTACT CHATTER PER METHOD 310 OF MIL-STD-202	
*TEST CIRCUIT (LETTER)	1503
*TEST CONDITION (LETTER)	1499
PERCENT RATED LOAD APPLIED (PERCENT)	6204
SOLDERABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4674
NO EVIDENCE OF PHYSICAL DAMAGE.	4675
MEET EVALUATION CRITERIA SPECIFIED IN METHOD 208 OF MIL-STD-202.	4672
REMAIN WITHIN SPECIFIED TOLERANCE.	4677

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1503	MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT 1503 SHALL APPLY.
1499	TEST CONDITION LETTER 1499 OF METHOD 310 OF MIL-STD-202 SHALL APPLY.
6204	THE ELECTRICAL LOAD SHALL BE 6204 PERCENT OF THE RATED LOAD.
4674	SOLDERABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4674.
4675	SOLDERABILITY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4672	THE RESULTS OF THE SOLDERABILITY TEST SHALL BE IN ACCORDANCE WITH THE ACCEPTANCE CRITERIA OF METHOD 208 OF MIL-STD-202.
4677	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SOLDERABILITY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4662
PER MIL-STD-202, METHOD 208.	4683
NUMBER OF TERMINALS TO BE TESTED (QUANTITY)	4666
DEPTH OF IMMERSION (SELECT ONE)	
(INCHES)	4667
(MILLIMETERS)	4663
DISTANCE WRAP WIRE APPLIED FROM BODY (SELECT ONE)	
(INCHES)	4664
(MILLIMETERS)	4665
SPECIAL PREPARATIONS PERMITTED.	6205
STRENGTH OF ACTUATING MEANS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1958
AS FOLLOWS:	1960

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4662	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4662.
4683	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 208 OF MIL-STD-202.
4666	4666 TERMINATION(S) PER UNIT SHALL BE TESTED.
4667	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4667 INCH(S).
4663	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4663 MILLIMETER(S).
4664	THE WRAP WIRE SHALL BE 4664 INCH(S) FROM THE BODY.
4665	THE WRAP WIRE SHALL BE 4665 MILLIMETER(S) FROM THE BODY.
6205	SPECIAL PREPARATION SHALL BE PERMITTED.
1958	STRENGTH OF ACTUATING MEANS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1958.
1960	STRENGTH OF ACTUATING MEANS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STRENGTH OF ACTUATING MEANS (CONT)	
AS FOLLOWS: (CONT)	
NO EVIDENCE OF DAMAGE.	1962
REMAIN WITHIN SPECIFIED TOLERANCES.	1964
NO ELECTRICAL DISCONTINUITY.	1966
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1968
PER DOCUMENT (DOC DES)	1970
TEST LOAD (SELECT ONE)	
(POUNDS)	1972
(NEWTONS)	1974
LOAD DURATION (SELECT ONE)	
(SECONDS)	1976
(MINUTES)	1978
TEST TORQUE (SELECT ONE)	
(POUND-INCHES)	1980
(NEWTON METERS)	1982

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1962	THERE SHALL BE NO EVIDENCE OF DAMAGE.
1964	THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE(S).
1966	THERE SHALL BE NO ELECTRICAL DISCONTINUITY.
1968	STRENGTH OF ACTUATING MEANS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1968.
1970	STRENGTH OF ACTUATING MEANS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1970.
1972	THE TEST LOAD SHALL BE 1972 POUNDS.
1974	THE TEST LOAD SHALL BE 1974 NEWTONS.
1976	THE TEST LOAD DURATION SHALL BE 1976 SECONDS.
1978	THE TEST LOAD DURATION SHALL BE 1978 MINUTE(S).
1980	THE TEST TORQUE SHALL BE 1980 POUND-INCH(S).
1982	THE TEST TORQUE SHALL BE 1982 NEWTON METER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERSITIC NAME	CHAR CODE
STRENGTH OF ACTUATING MEANS (CONT)	
PER DOCUMENT (CONT)	
TORQUE DURATION (SELECT ONE)	
(SECONDS)	1984
(MINUTES)	1986
STRENGTH OF MOUNTING MEANS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2300
AS FOLLOWS:	2302
NO EVIDENCE OF DAMAGE.	2304
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2310
PER DOCUMENT (DOC DES)	2312
TEST TORQUE (SELECT ONE)	
(POUND-INCHES)	2314
(NEWTON METERS)	2316

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1984	THE DURATION OF THE TEST TORQUE SHALL BE 1984 SECOND(S).
1986	THE DURATION OF THE TEST TORQUE SHALL BE 1986 MINUTE(S).
2300	STRENGTH OF MOUNTING MEANS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2300.
2302	STRENGTH OF MOUNTING MEANS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2304	THERE SHALL BE NO EVIDENCE OF DAMAGE.
2310	STRENGTH OF MOUNTING MEANS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2310.
2312	STRENGTH OF MOUNTING MEANS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2312.
2314	THE TEST TORQUE SHALL BE 2314 POUND-INCH(S).
2316	THE TEST TORQUE SHALL BE 2316 NEWTON METER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERSITIC NAME	CHAR CODE
TEMPERATURE, HIGH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6228
NO EVIDENCE OF PHYSICAL DAMAGE.	6229
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6217
PER DOCUMENT (DOC DES)	3700
PROCEDURE (ROMAN NUMERAL)	6219
STORAGE TEMPERATURE (DEGREES CELSIUS)	6220
STORAGE DURATION (HOURS)	6221
HIGHEST OPERATING TEMPERATURE (DEGREES CELSIUS)	6222
OPERATION TIME (SELECT ONE)	
(MINUTES)	6224
(HOURS)	6225
TEMPERATURE, LOW	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6318

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6228	TEMPERATURE, HIGH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6228.
6229	TEMPERATURE, HIGH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6217	TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6217.
3700	TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3700.
6219	PROCEDURE NUMBER 6219 SHALL APPLY.
6220	STORAGE TEMPERATURE SHALL BE 6220 DEGREES CELSIUS.
6221	STORAGE DURATION SHALL BE 6221 HOUR(S).
6222	HIGHEST OPERATING TEMPERATURE SHALL BE 6222 DEGREES CELSIUS.
6224	OPERATING TIME SHALL BE 6224 MINUTE(S).
6225	OPERATING TIME SHALL BE 6225 HOUR(S).
6318	TEMPERATURE, LOW. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6318.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, LOW (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE.	6319
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6231
PER DOCUMENT (DOC DES)	3702
STORAGE TEMPERATURE (DEGREES CELSIUS)	6234
STORAGE DURATION (HOURS)	6235
LOWEST OPERATING TEMPERATURE (DEGREES CELSIUS)	6236
CHAMBER AIR VELOCITY (SELECT ONE)	
(FEET PER SECOND)	6237
(METERS PER SECOND)	6238
OPERATION TIME (SELECT ONE)	
(MINUTES)	6315
(HOURS)	6316

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6319	TEMPERATURE, LOW. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6231	TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6231.
3702	TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3702.
6234	STORAGE TEMPERATURE SHALL BE 6234 DEGREES CELSIUS.
6235	STORAGE DURATION SHALL BE 6235 HOUR(S).
6236	LOWEST OPERATING TEMPERATURE SHALL BE 6236 DEGREES CELSIUS.
6237	CHAMBER AIR VELOCITY SHALL BE 6237 FEET PER SECOND.
6238	CHAMBER AIR VELOCITY SHALL BE 6238 METERS PER SECOND.
6315	OPERATING TIME SHALL BE 6315 MINUTE(S).
6316	OPERATING TIME SHALL BE 6316 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE RISE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2320
MAXIMUM TEMPERATURE RISE (DEGREES CELSIUS)	2322
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2324
PER DOCUMENT (DOC DES)	2326
TEST CURRENT (SELECT ONE)	
(PERCENT OF RATED CURRENT)	2328
(AMPERES)	2330
TEST CURRENT APPLICATION DURATION (SELECT ONE)	
(MINUTES)	2332
(HOURS)	2334
TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	2336
(VOLTS, AC)	2338

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2320	TEMPERATURE RISE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2320.
2322	TEMPERATURE RISE. THE TEMPERATURE RISE SHALL BE NOT GREATER THAN 2322 DEGREES CELSIUS.
2324	TEMPERATURE RISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2324.
2326	TEMPERATURE RISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2326.
2328	THE TEST CURRENT SHALL BE 2328 PERCENT OF THE RATED CURRENT.
2330	THE TEST CURRENT SHALL BE 2330 AMPERE(S).
2332	THE TEST CURRENT APPLICATION DURATION SHALL BE 2332 MINUTES.
2334	THE TEST CURRENT APPLICATION DURATION SHALL BE 2334 HOUR(S).
2336	THE TEST VOLTAGE SHALL BE 2336 VOLTS, DC.
2338	THE TEST VOLTAGE SHALL BE 2338 VOLTS, AC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE RISE (CONT)	
PER DOCUMENT (CONT)	
NUMBER OF READINGS (QUANTITY)	2340
READING INTERVAL (MINUTES)	2342
TERMINAL STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1418
NO EVIDENCE OF PHYSICAL DAMAGE.	1433
REMAIN WITHIN SPECIFIED TOLERANCE.	6296
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1410
PER MIL-STD-202, METHOD 211.	1375
*TEST CONDITIONS	
TEST CONDITION A, APPLIED FORCE (SELECT ONE)	
(POUNDS)	1411
(NEWTONS)	1419

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2340	THERE SHALL BE 2340 READINGS.
2342	THE READING INTERVAL SHALL BE 2342 MINUTE(S).
1418	TERMINAL STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1418.
1433	TERMINAL STRENGTH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6296	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1410	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1410.
1375	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 211 OF MIL-STD-202.
1411	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1411 POUND(S).
1419	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1419 NEWTON(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINAL STRENGTH (CONT)	
TEST CONDITIONS (CONT)	
TEST CONDITION B, BENDS (NUMBER)	1412
TEST CONDITION C, LOAD (SELECT ONE)	
(POUNDS)	1413
(KILOGRAMS)	1420
TEST CONDITION D.	1414
TEST CONDITION E, TORQUE (SELECT ONE)	
(POUND-INCHES)	1416
(NEWTON METERS)	1421
THERMAL SHOCK (TEMPERATURE CYCLING)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4722
NO EVIDENCE OF PHYSICAL DAMAGE.	4723
REMAIN WITHIN SPECIFIED TOLERANCE.	4726

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1412	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION B. THERE SHALL BE 1412 BEND(S).
1413	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1413 POUND(S).
1420	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1420 KILOGRAM(S).
1414	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION D.
1416	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1416 POUND-INCH(S).
1421	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1421 NEWTON METERS.
4722	THERMAL SHOCK (TEMPERATURE CYCLING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4722.
4723	THERMAL SHOCK (TEMPERATURE CYCLING). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4726	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THERMAL SHOCK (TEMPERATURE CYCLING) (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4713
PER MIL-STD-202, METHOD 107.	4714
*TEST CONDITION (LETTER)	4715
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4719
TRANSIENT SUSCEPTIBILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2344
AS FOLLOWS:	2346
NO ELECTRICAL OR MECHANICAL MALFUNCTION.	2348
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2350
PER MIL-C-83383.	2352
TEST VOLTAGE (VOLTS)	2354
NUMBER OF TEST CYCLES (QUANTITY)	2356

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4713	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4713.
4714	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 107 OF MIL-STD-202.
4715	TEST CONDITION LETTER 4715 SHALL APPLY.
4719	MOUNTING SHALL BE IN ACCORDANCE WITH 4719.
2344	TRANSIENT SUSCEPTIBILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2344.
2346	TRANSIENT SUSCEPTIBILITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2348	THERE SHALL BE NO ELECTRICAL OR MECHANICAL MALFUNCTION.
2350	TRANSIENT SUSCEPTIBILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2350.
2352	TRANSIENT SUSCEPTIBILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-83383.
2354	THE TEST VOLTAGE SHALL BE 2354 VOLT(S).
2356	THERE SHALL BE 2356 TEST CYCLES.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, HIGH FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1455
NO EVIDENCE OF PHYSICAL DAMAGE.	1456
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY DURING TEST.	1473
MAXIMUM DISCONTINUITY (SELECT ONE)	
(MICROSECONDS)	2540
(MILLISECONDS)	2542
NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.	1552
REMAIN WITHIN SPECIFIED TOLERANCE.	1469
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1446
PER MIL-STD-202, METHOD 204.	1447
*TEST CONDITION (LETTER)	1448
PERCENT RATED LOAD APPLIED (PERCENT)	6200

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1455	VIBRATION, HIGH FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1455.
1456	VIBRATION, HIGH FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1473	THERE SHALL BE NO DISCONTINUITY DURING TEST.
2540	DISCONTINUITY SHALL BE NOT GREATER THAN 2540 MICROSECOND(S).
2542	DISCONTINUITY SHALL BE NOT GREATER THAN 2542 MILLISECOND(S).
1552	NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.
1469	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1446	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1446.
1447	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 204 OF MIL-STD-202.
1448	TEST CONDITION LETTER 1448 SHALL APPLY.
6200	THE LOAD SHALL BE 6200 PERCENT OF THE RATED LOAD.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, HIGH FREQUENCY (CONT)	
PER MIL-STD-202, METHOD 204. (CONT)	
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4709
NORMAL MOUNTING MEANS.	4708
MOUNT PER DOCUMENT (DOC DES)	4707
METHOD OF DETERMINING MECHANICAL RESONANCE (SELECT ONE)	
VISUALLY BY MEANS OF A STROBOTAC.	1533
ELECTRICAL OUTPUT INDICATORS.	1534
MONITOR CONTACT CHATTER IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202.	
*TEST CIRCUIT (LETTER)	1442
*TEST CONDITION (LETTER)	1444
VIBRATION, LOW FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1475

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4709	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4708	MOUNTING SHALL BE BY THE NORMAL METHOD.
4707	MOUNTING SHALL BE IN ACCORDANCE WITH 4707.
1533	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE VISUALLY BY MEANS OF A STROBOTAC.
1534	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE BY ELECTRICAL OUTPUT INDICATORS.
1442	MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1442 SHALL APPLY.
1444	TEST CONDITION LETTER 1444 OF METHOD 310 OF MIL-STD-202 SHALL APPLY.
1475	VIBRATION, LOW FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1475.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE.	1476
REMAIN WITHIN SPECIFIED TOLERANCE.	1480
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY DURING TEST.	1490
MAXIMUM DISCONTINUITY (SELECT ONE)	
(MICROSECONDS)	2550
(MILLISECONDS)	2552
NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.	1553
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1466
PER MIL-STD-202, METHOD 210.	1467
DURATION OF VIBRATION PER AXIS (HOURS)	1470

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1476	VIBRATION, LOW FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1480	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1490	THERE SHALL BE NO DISCONTINUITY DURING TEST.
2550	DISCONTINUITY SHALL BE NOT GREATER THAN 2550 MICROSECOND(S).
2552	DISCONTINUITY SHALL BE NOT GREATER THAN 2552 MILLISECOND(S).
1553	NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.
1466	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1466.
1467	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 201 OF MIL-STD-202.
1470	DURATION OF TEST SHALL BE 1470 HOUR(S) PER AXIS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY (CONT)	
PER MIL-STD-202, METHOD 210. (CONT)	
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4731
NORMAL MOUNTING MEANS.	4730
MOUNT PER DOCUMENT (DOC DES)	4729
DIRECTION OF MOTION (SELECT ONE)	
PARALLEL TO LONGITUDINAL AXIS.	1535
PERPENDICULAR TO LONGITUDINAL AXIS.	1536
ON THE CENTERLINE OF MOST SENSITIVE AXIS.	4979
90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.	4978
THREE MUTUALLY PERPENDICULAR DIRECTIONS.	1537
MONITOR CONTACT CHATTER IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202.	
*TEST CIRCUIT (LETTER)	1491
*TEST CONDITION (LETTER)	1492
PERCENT RATED LOAD APPLIED (PERCENT)	6201

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4731	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4730	MOUNTING SHALL BE BY THE NORMAL METHOD.
4729	MOUNTING SHALL BE IN ACCORDANCE WITH 4729.
1535	THE DIRECTION OF MOTION SHALL BE PARALLEL TO THE LONGITUDINAL AXIS.
1536	THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE LONGITUDINAL AXIS.
4979	THE DIRECTION OF MOTION SHALL BE ON THE CENTERLINE OF THE MOST SENSITIVE AXIS.
4978	THE DIRECTION OF MOTION SHALL BE 90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.
1537	THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUALLY PERPENDICULAR DIRECTIONS.
1491	MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1491 SHALL APPLY.
1492	TEST CONDITION LETTER 1492 OF METHOD 310 OF MIL-STD-202 SHALL APPLY.
6201	THE LOAD SHALL BE 6201 PERCENT OF THE RATED LOAD.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1435
NO EVIDENCE OF PHYSICAL DAMAGE.	1436
REMAIN WITHIN SPECIFIED TOLERANCE.	1538
DISCONTINUITY DURING TEST (SELECT ONE)	
NO DISCONTINUITY.	1374
MAXIMUM (MILLISECONDS)	1545
MAXIMUM (MICROSECONDS)	1546
NO LAMP IN TEST CIRCUIT SHALL LIGHT.	1457
TEST METHOD (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1426
PER MIL-STD-202, METHOD 214.	1427
*TEST CONDITION (ROMAN NUMERAL AND LETTER)	1428
*DURATION OF APPLICATION (SELECT ONE)	
(MINUTES)	1438
(HOURS)	1431

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1435	VIBRATION, RANDOM. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1435.
1436	VIBRATION, RANDOM. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1538	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1374	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1545	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1545 MILLISECOND(S).
1546	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1546 MICROSECOND(S).
1457	NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.
1426	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1426.
1427	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 214 OF MIL-STD-202.
1428	TEST CONDITION NUMBER AND LETTER 1428 SHALL APPLY.
1438	THE DURATION OF THE TEST SHALL BE 1438 MINUTE(S).
1431	THE DURATION OF THE TEST SHALL BE 1431 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
PER MIL-STD-202, METHOD 214. (CONT)	
MONITORING INSTRUMENTATION OF EXCITATION (SELECT ONE)	
ANY SUITABLE SYSTEM.	1452
CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.	1453
CALIBRATED OSCILLOSCOPE.	1459
NUMBER OF VIBRATION MONITORING TEST POINTS (QUANTITY)	1430
LOCATION OF MONITORING POINTS (SELECT ONE)	
ANY SUITABLE LOCATION.	1439
AS CLOSE AS PRACTICAL TO TEST SPECIMEN.	1462
MONITOR CONTACT CHATTER IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202.	
*TEST CIRCUIT (LETTER)	1402
*TEST CONDITION (LETTER)	1382

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1452	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE ANY SUITABLE INSTRUMENTATION SYSTEM.
1453	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.
1459	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED OSCILLOSCOPE.
1430	THERE SHALL BE 1430 VIBRATION MONITORING POINT(S).
1439	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE ANY SUITABLE LOCATION.
1462	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE AS CLOSE AS PRACTICAL TO THE TEST SPECIMEN(S).
1402	MONITORING DURING THE TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1402 SHALL APPLY.
1382	TEST CONDITION LETTER 1382 IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
PER MIL-STD-202, METHOD 214. (CONT)	
PERCENT OF RATED LOAD APPLIED (PERCENT)	4678
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4977
NORMAL MOUNTING METHOD.	4976
MOUNT PER DOCUMENT (DOC DES)	4975
PER MIL-STD-167-1.	2560
TYPES OF VIBRATION REQUIRED (ROMAN NUMERAL)	2562
WATERPROOFNESS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2360
NO EVIDENCE OF WATER LEAKAGE.	2362
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2364
PER MIL-E-13856.	2366

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4678	THE LOAD SHALL BE 4678 PERCENT OF THE RATED LOAD.
4977	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4976	MOUNTING SHALL BE BY THE NORMAL METHOD.
4975	MOUNTING SHALL BE IN ACCORDANCE WITH 4975.
2560	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-167-1.
2562	TESTING SHALL BE PERFORMED PER TYPE 2562 CLASSIFICATION.
2360	WATERPROOFNESS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2360.
2362	WATERPROOFNESS. THERE SHALL BE NO EVIDENCE OF WATER LEAKAGE.
2364	WATERPROOFNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2364.
2366	WATERPROOFNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-E-13856.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WATERPROOFNESS (CONT)	
PER MIL-E-13856. (CONT)	
TYPE (SELECT ONE)	
I.	2368
II.	2370
CLASS (SELECT ONE)	
1.	2372
2.	2374
3.	2376
4.	2378
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2368	THE SWITCH SHALL BE CLASSIFIED AS TYPE I.
2370	THE SWITCH SHALL BE CLASSIFIED AS TYPE II.
2372	THE SWITCH SHALL BE CLASSIFIED AS CLASS 1.
2374	THE SWITCH SHALL BE CLASSIFIED AS CLASS 2.
2376	THE SWITCH SHALL BE CLASSIFIED AS CLASS 3.
2378	THE SWITCH SHALL BE CLASSIFIED AS CLASS 4.
	MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995
DEFINITION OF HERMETIC SEALING	
NOTE: AUTOMATIC WHEN CODE 1578 IS USED TO REQUIRE HERMETIC SEALING.	
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

DEFINITION OF HERMETIC SEALING. FOR THE PURPOSE OF THIS DOCUMENT, A HERMETICALLY-SEALED ITEM IS ONE IN WHICH THE ELEMENT IS CONTAINED WITHIN A SEALED ENCLOSURE OF CERAMIC, GLASS OR METAL, OR A COMBINATION THEREOF, WHERE SEALING IS ACCOMPLISHED BY MATERIAL FUSION, WELDING, BRAZING OR SOLDERING.

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI


(Project EDS-A280)

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.


APPENDIX A


ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

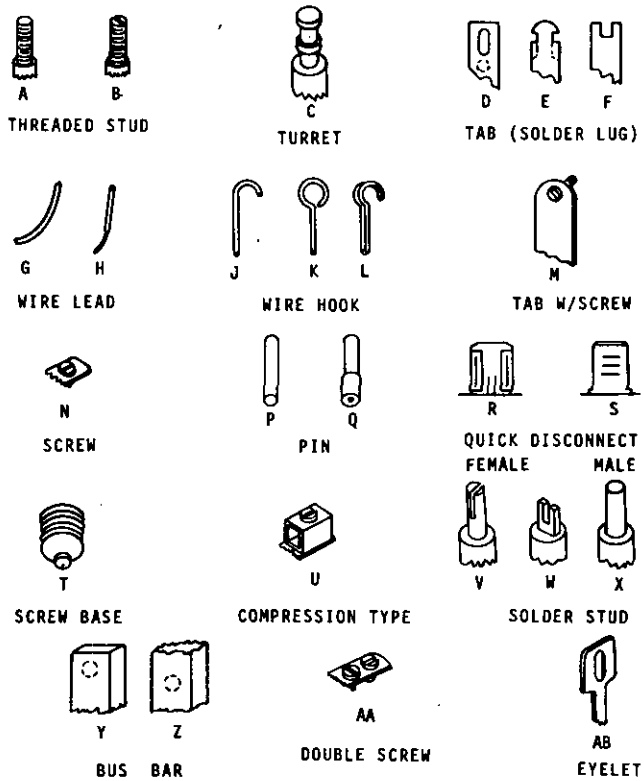


Ø52-Ø1-1



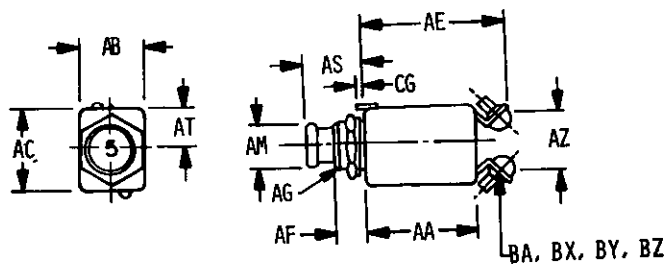


Ø52-Ø2-1

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

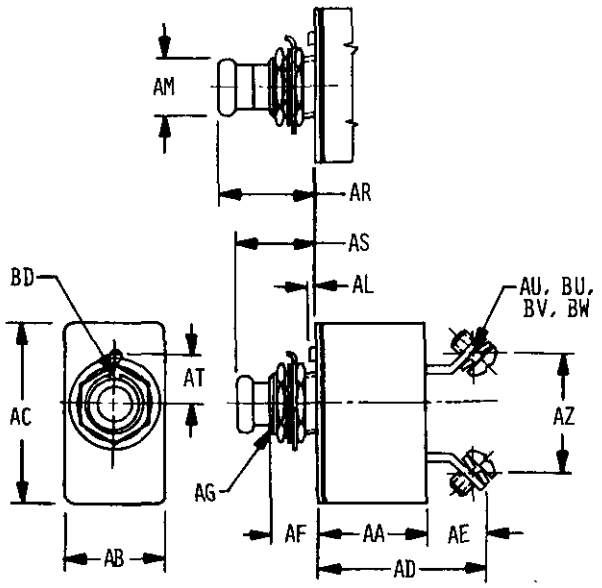


Ø52-Ø2-2

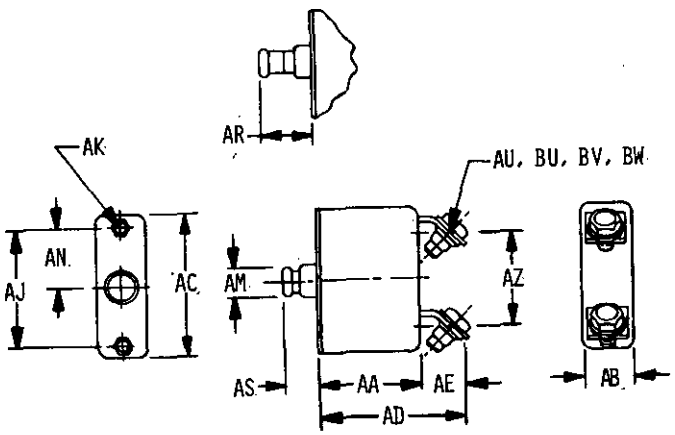


Ø52-Ø2-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

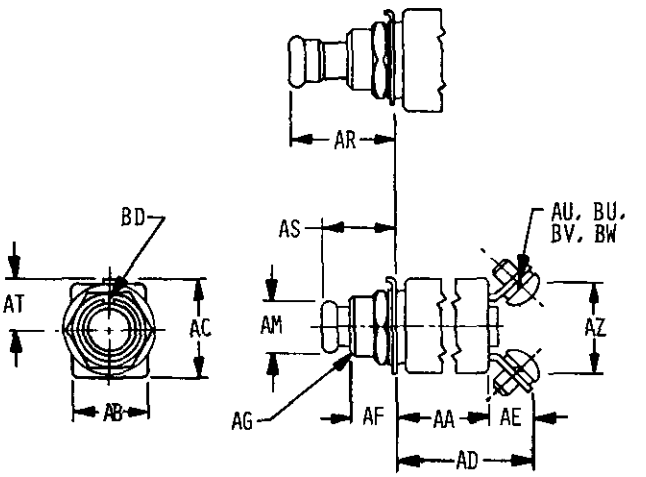


052-03-1

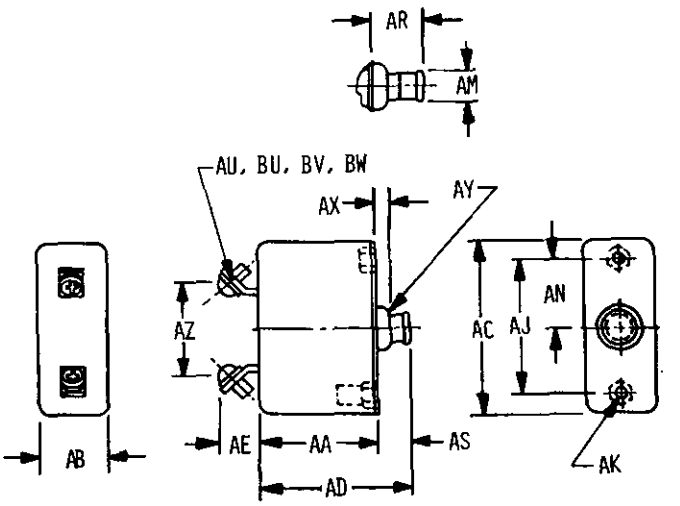


052-03-2

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

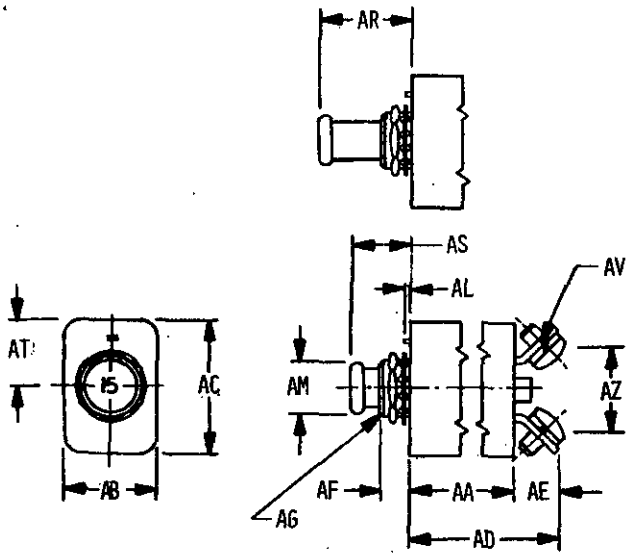


052-03-3

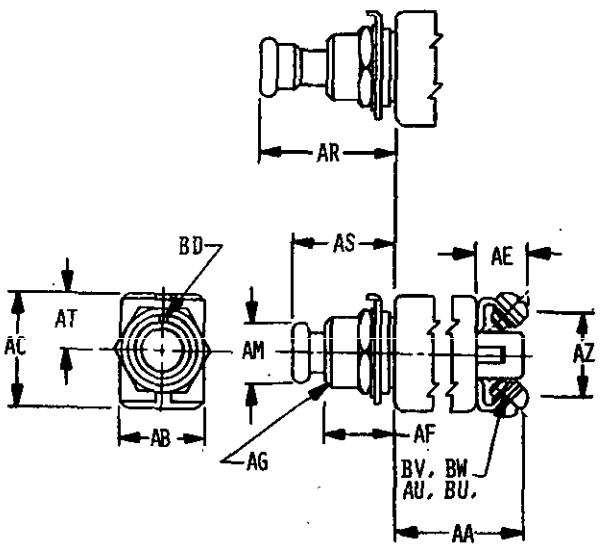


052-03-4

Source: https://assist.dla.mil/ Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

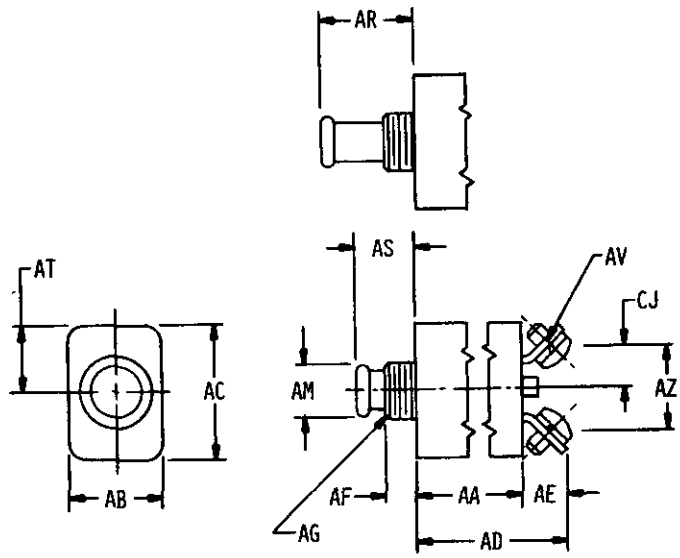


Ø52-Ø3-5

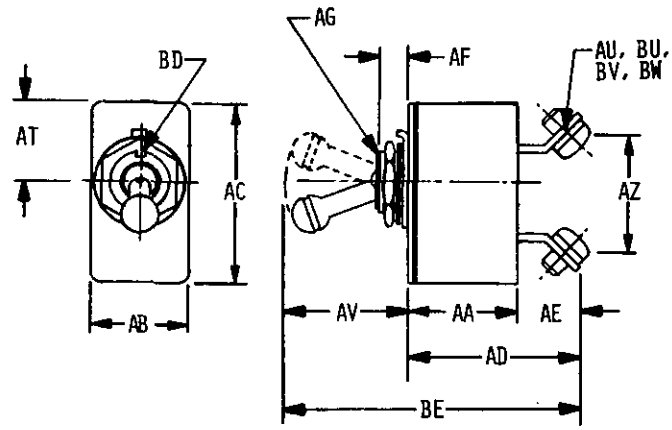


Ø52-Ø4-1

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

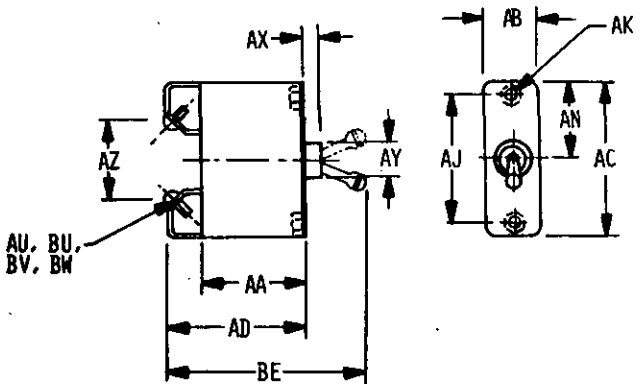


052-04-2

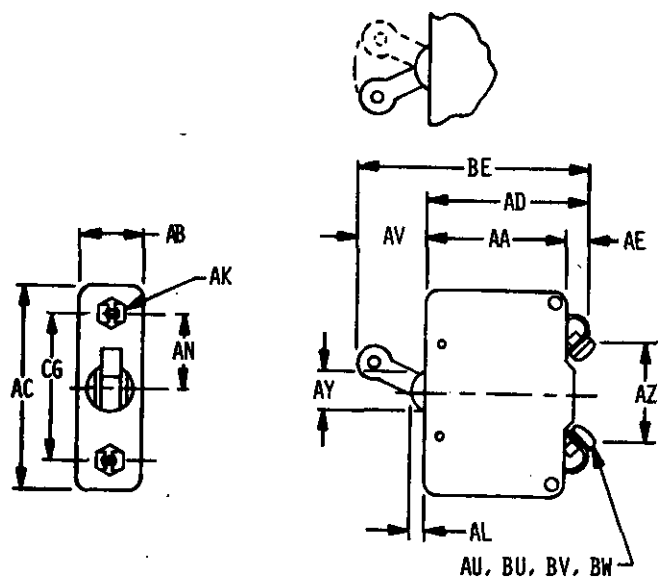


052-05-1

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

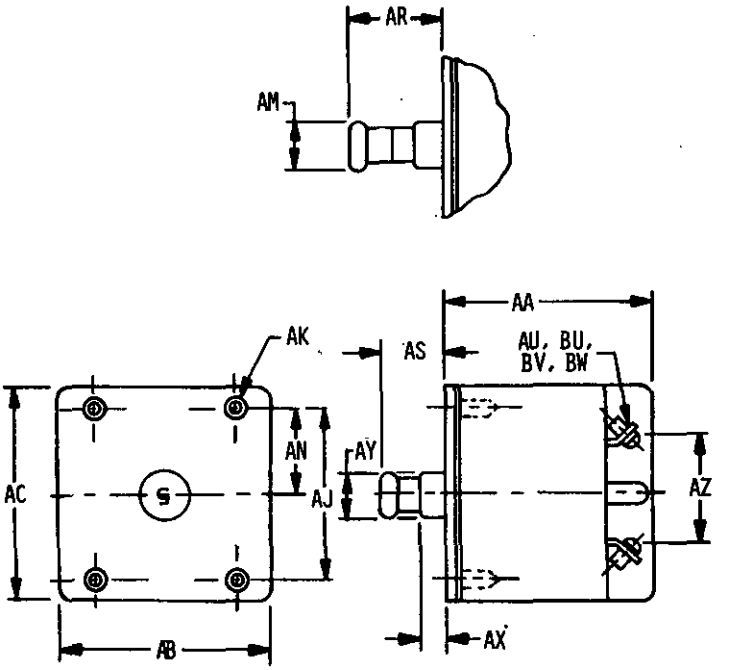


Ø52-Ø6-1

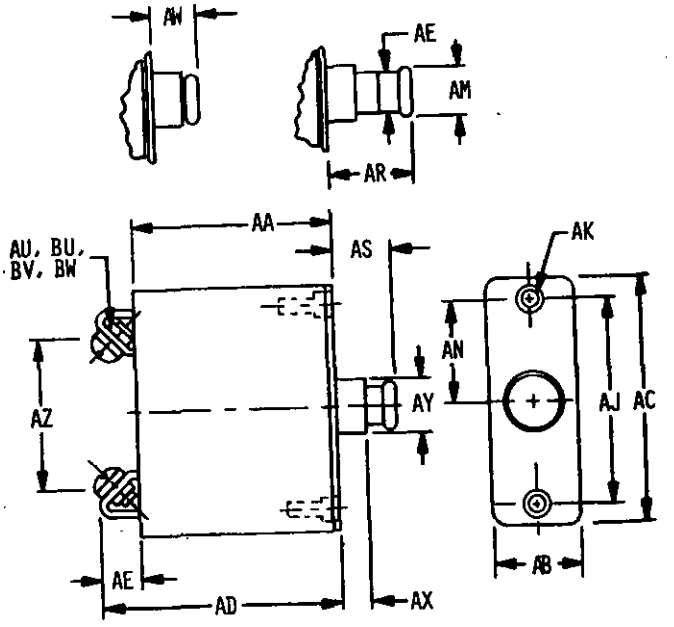


Ø52-Ø7-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

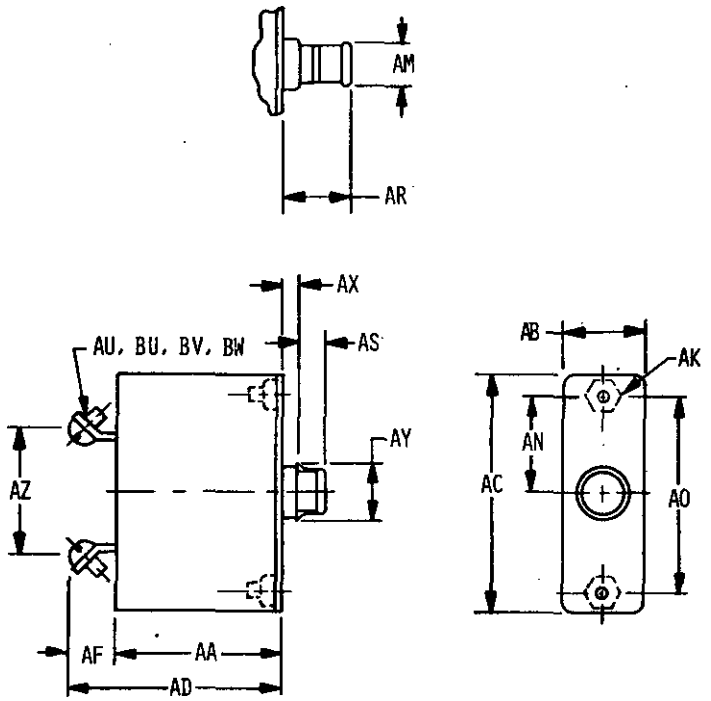


Ø52-Ø8-1

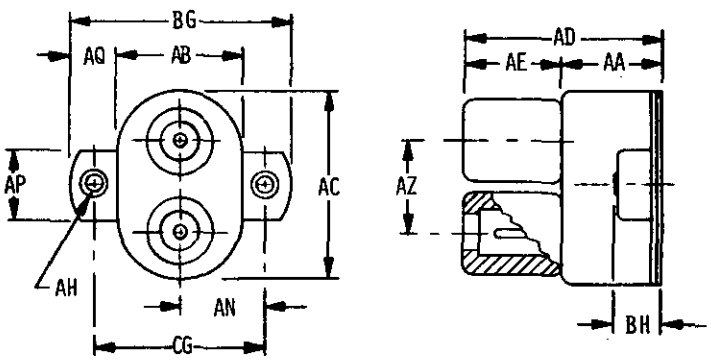


Ø52-Ø9-1

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

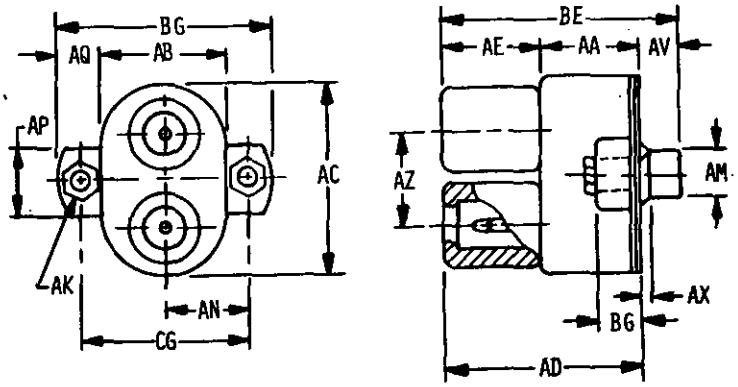


Ø52-10-1

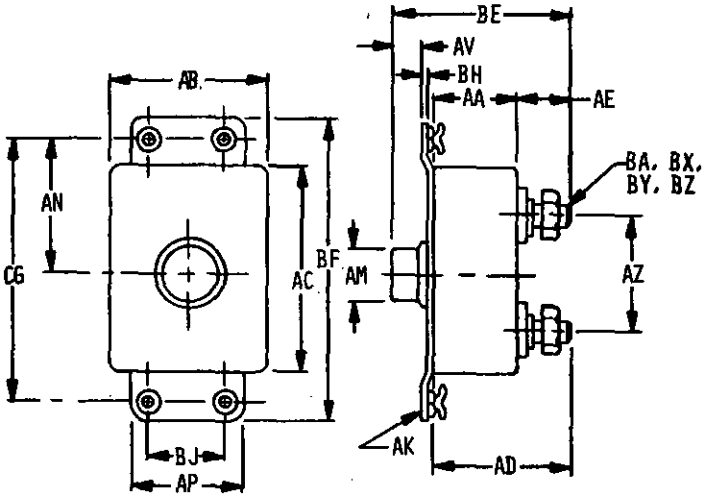


Ø52-11-1

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

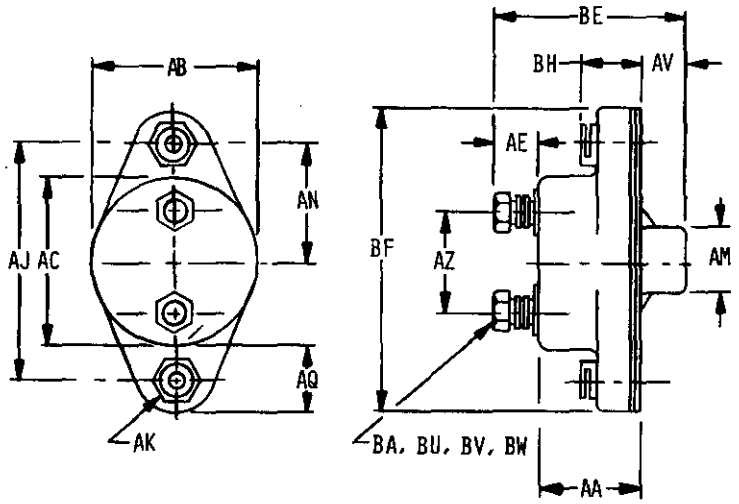


Ø52-11-2

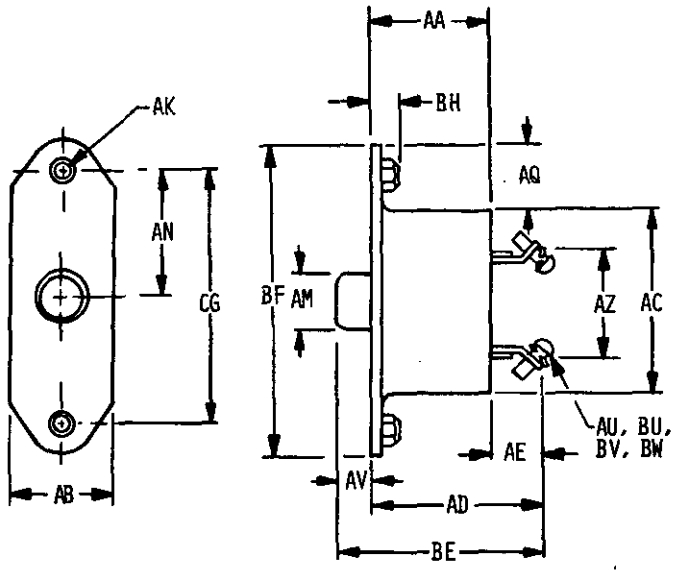


Ø52-11-3

Source: https://assist.dla.mil Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

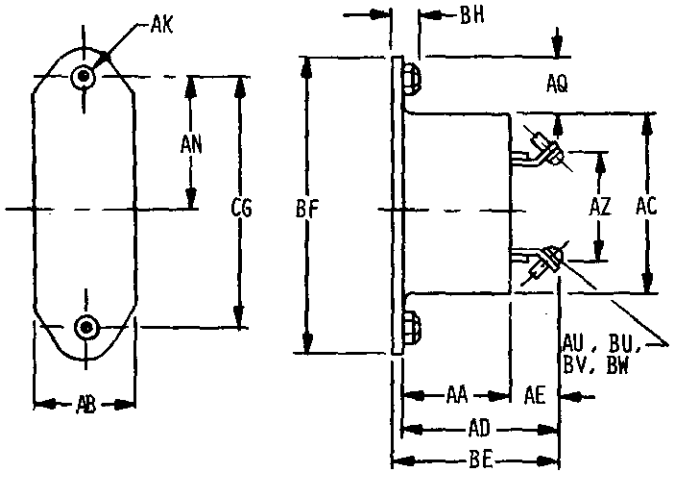


052-12-1

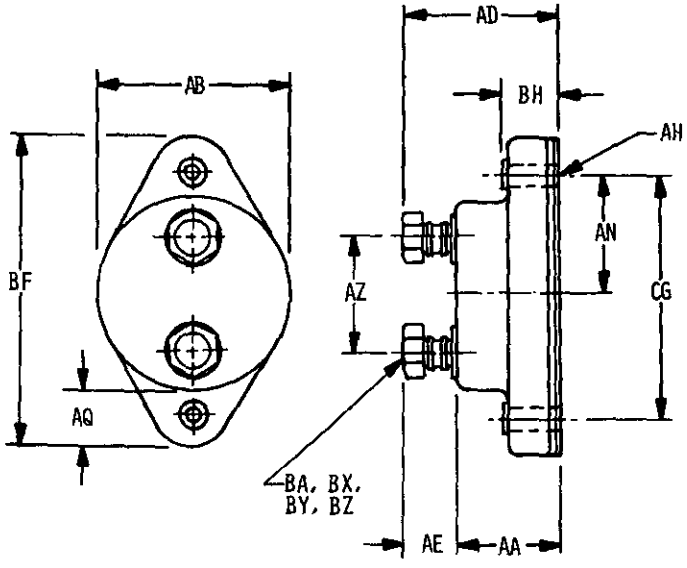



052-12-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

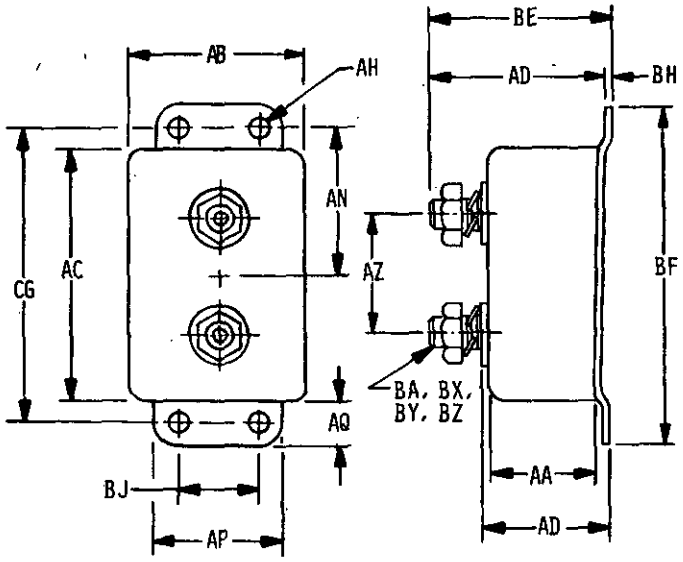


Ø52-12-3



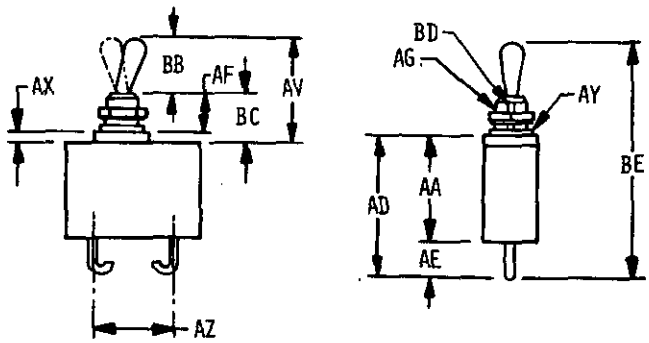


Ø52-13-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

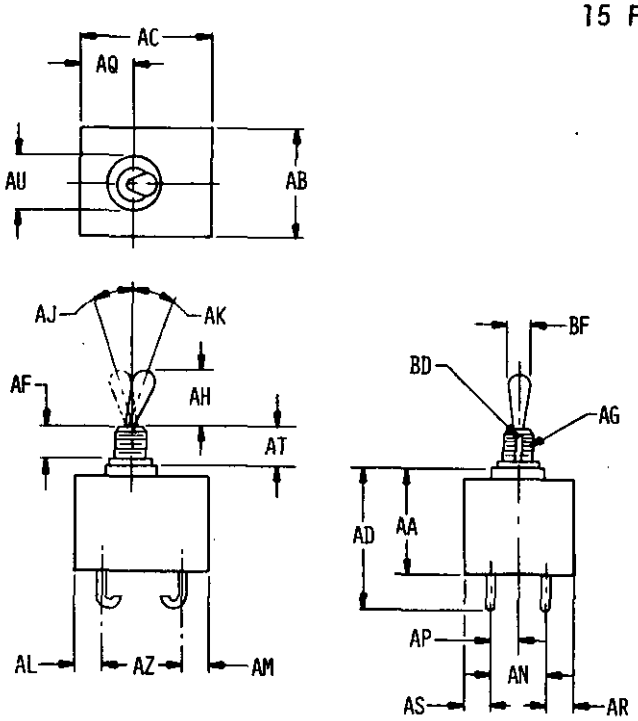


052-13-2

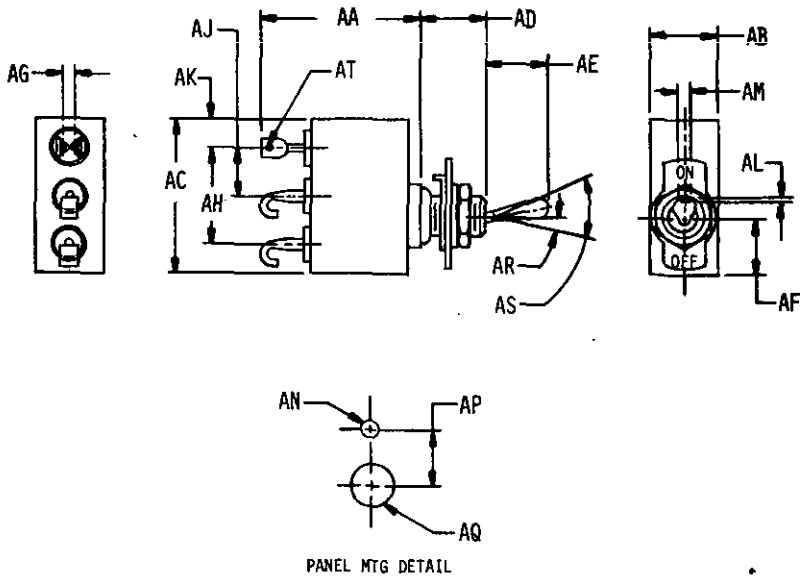


PANEL MTG DETAIL

052-13-3


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

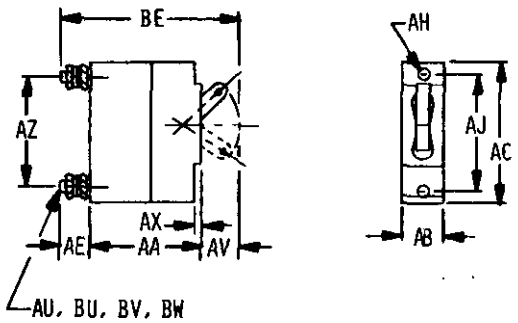


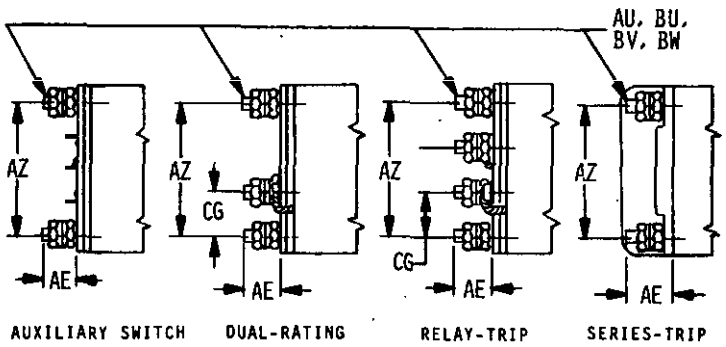

Ø52-14-1


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

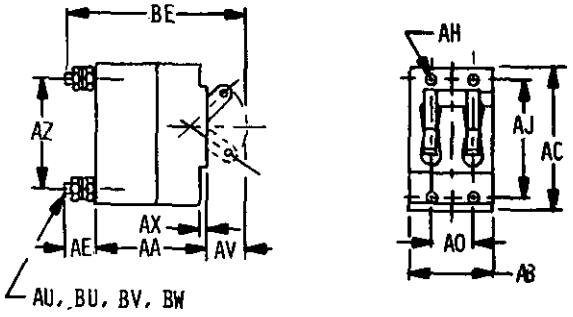

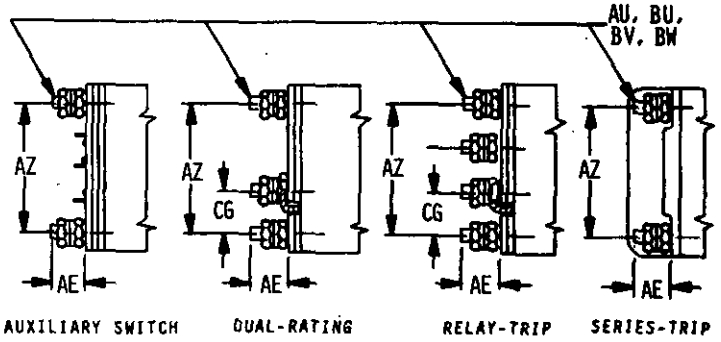


052-14-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

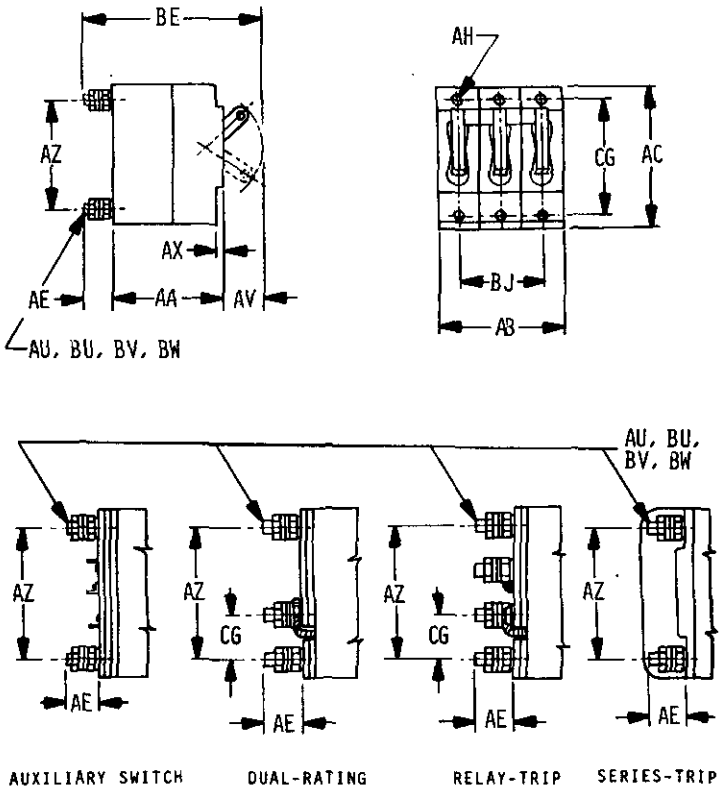


052-14-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

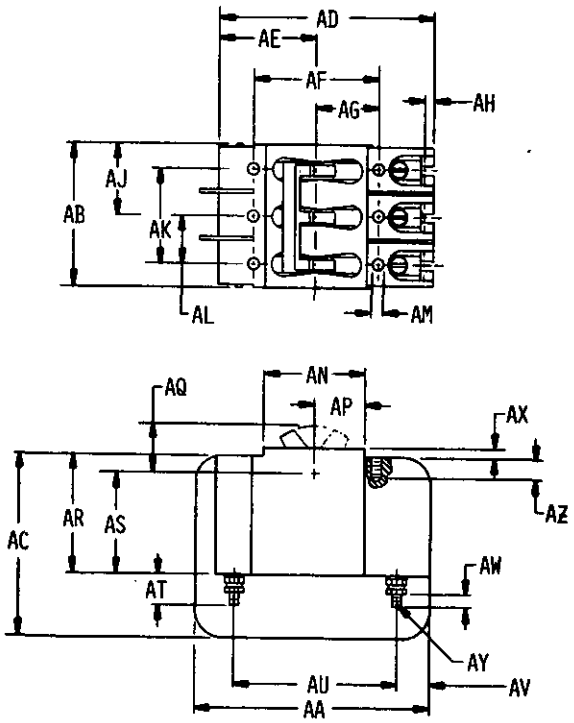


052-14-4


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

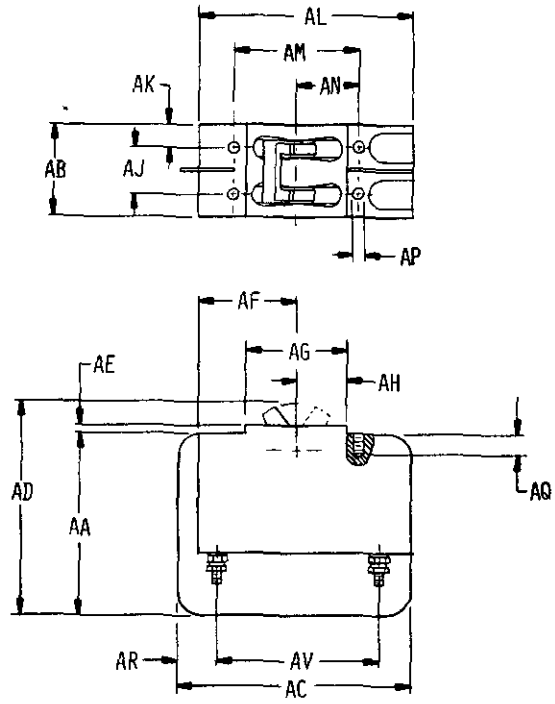


052-14-5

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

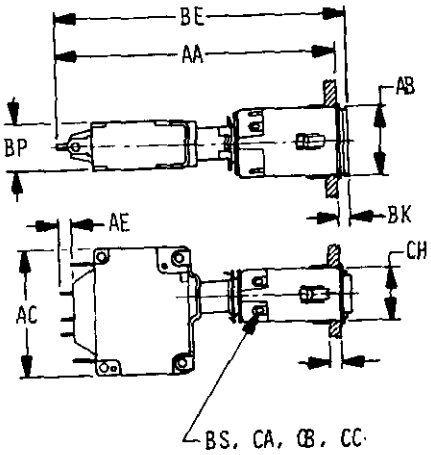




A. HORIZONTAL SPLIT




B. 3-WAY, BOTTOM SPLIT

052-15-1

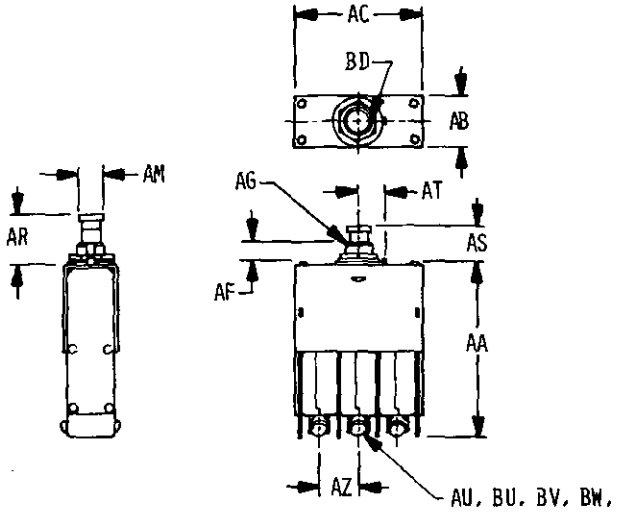


052-16-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

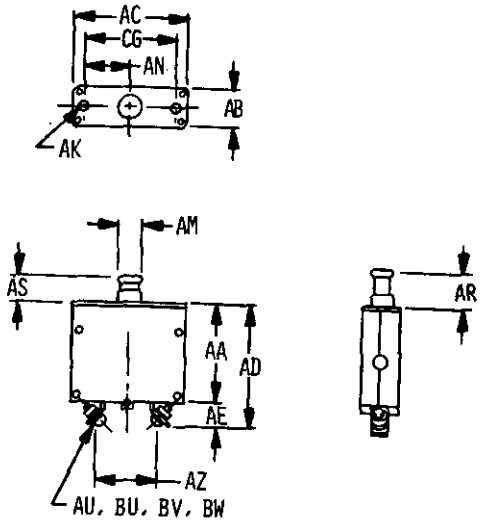


Ø52-16-2

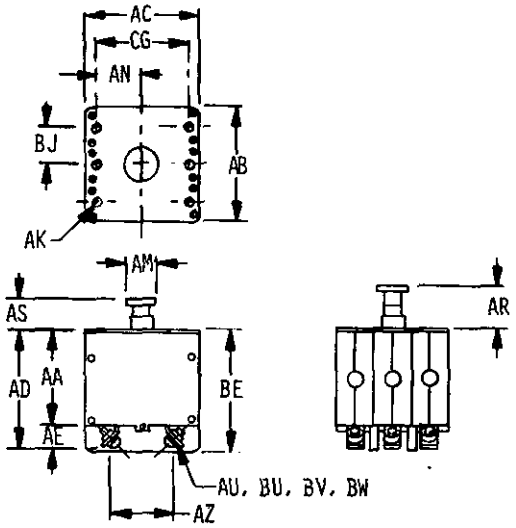


Ø52-16-3

Source: https://assist.dla.mil -- Downloaded: 2026Ø10-26T07:23Z
Check the source to verify that this is the current version before use.

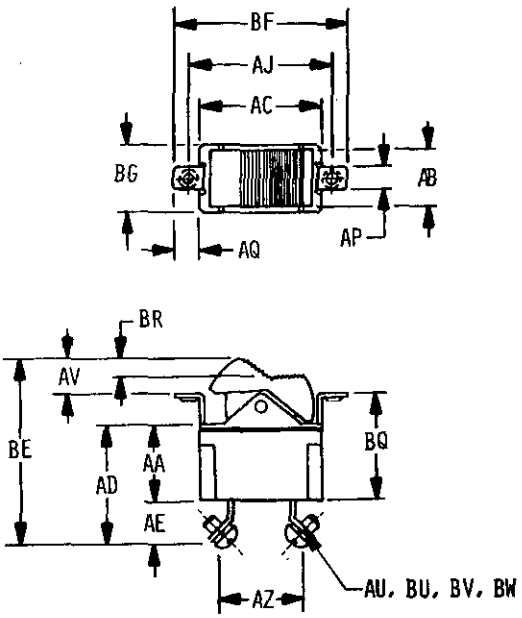


Ø52-17-1

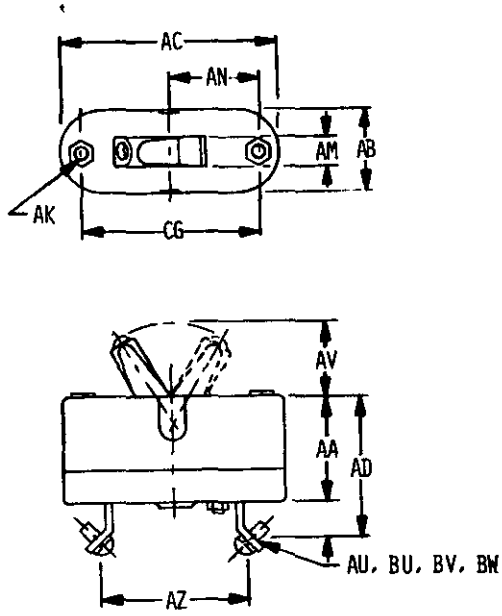


Ø52-18-1

Source: https://assist.dla.mil -- Downloaded: 2026Ø10-26T07:23Z
Check the source to verify that this is the current version before use.

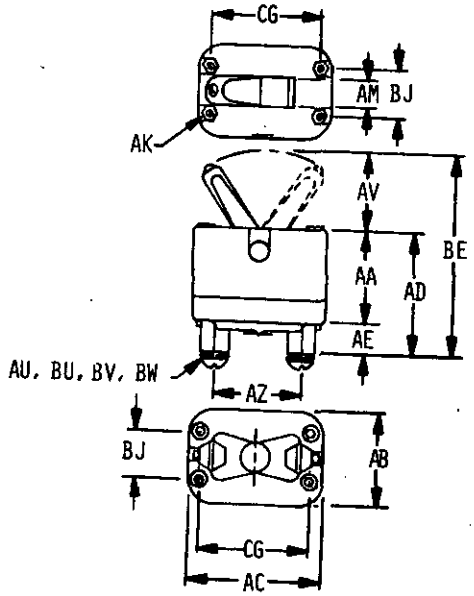


Ø52-18-2

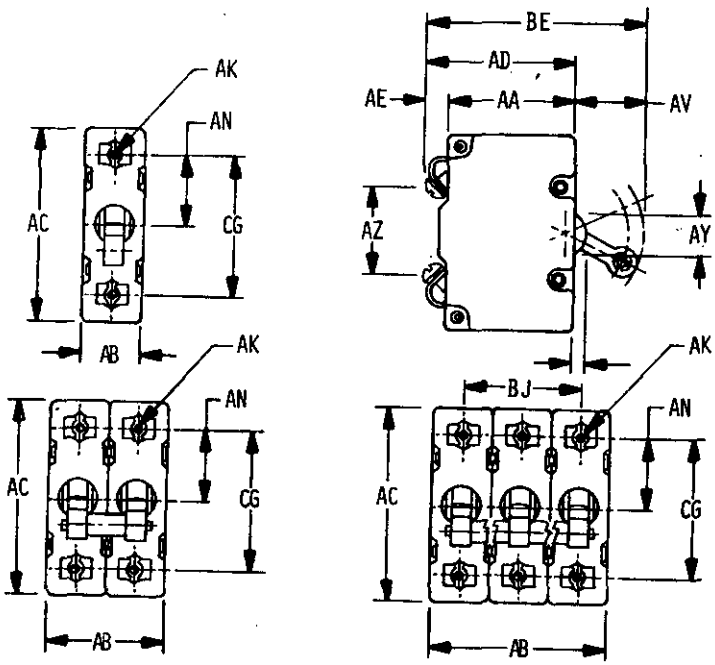


Ø52-18-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

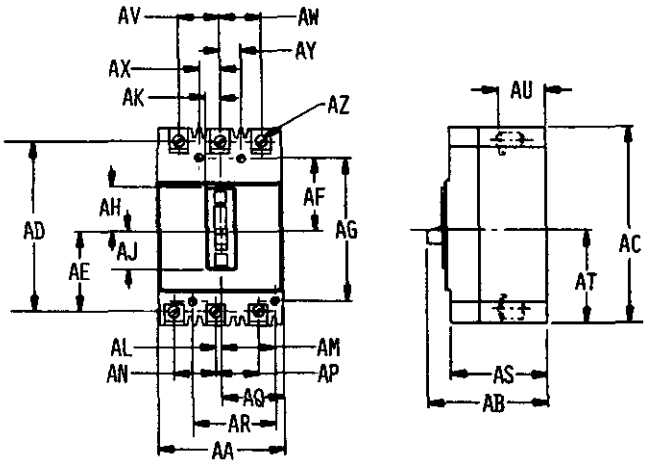


Ø52-18-4

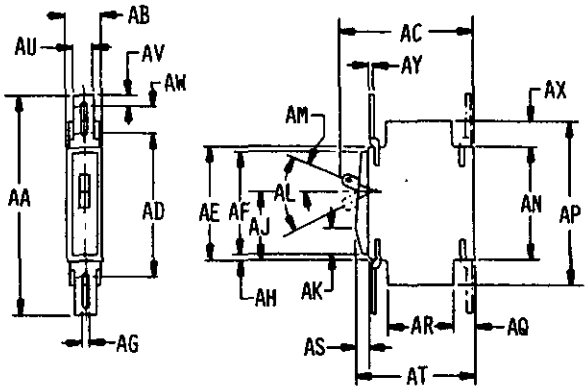


Ø52-18-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

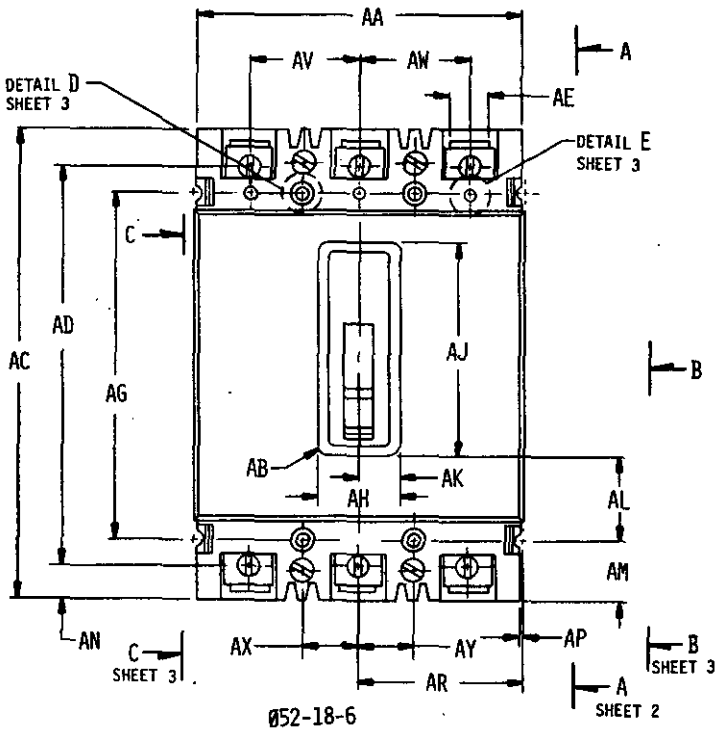


Ø52-18-6
SHEET 1 OF 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

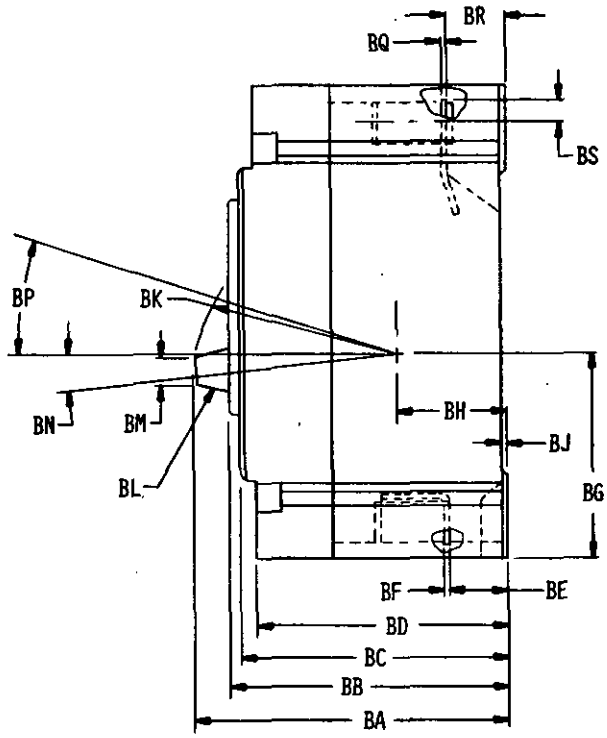


VIEW A-A
052-18-6
SHEET 2 OF 3


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.




VIEW B-B



VIEW C-C




DETAIL D



DETAIL E


Ø52-18-6
SHEET 3 OF 3

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

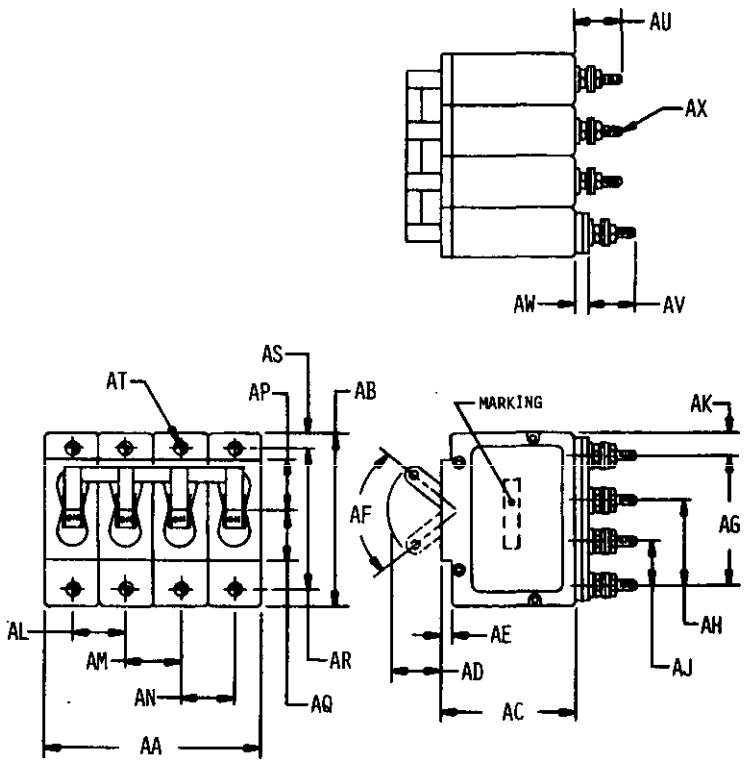


052-18-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

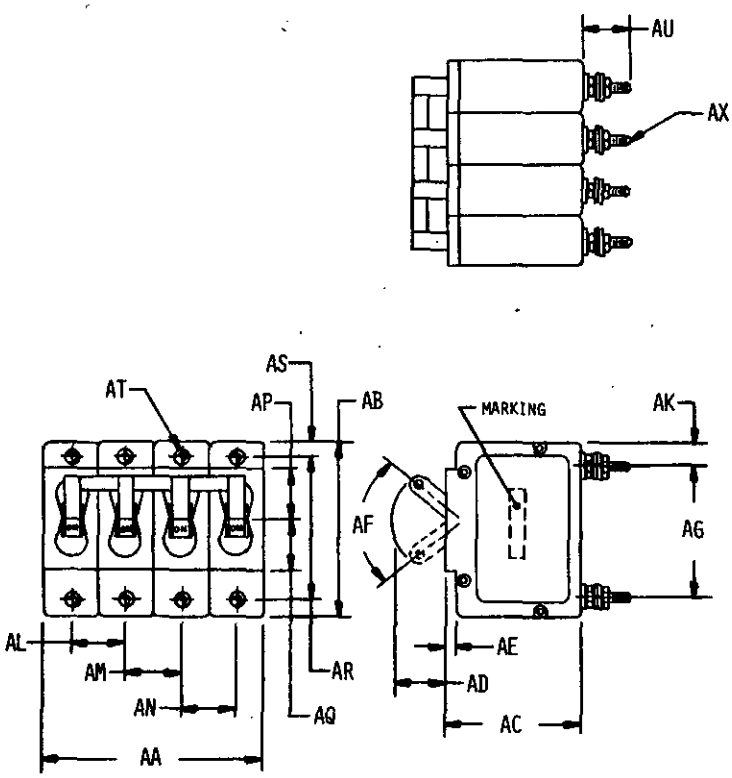


052-18-8

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

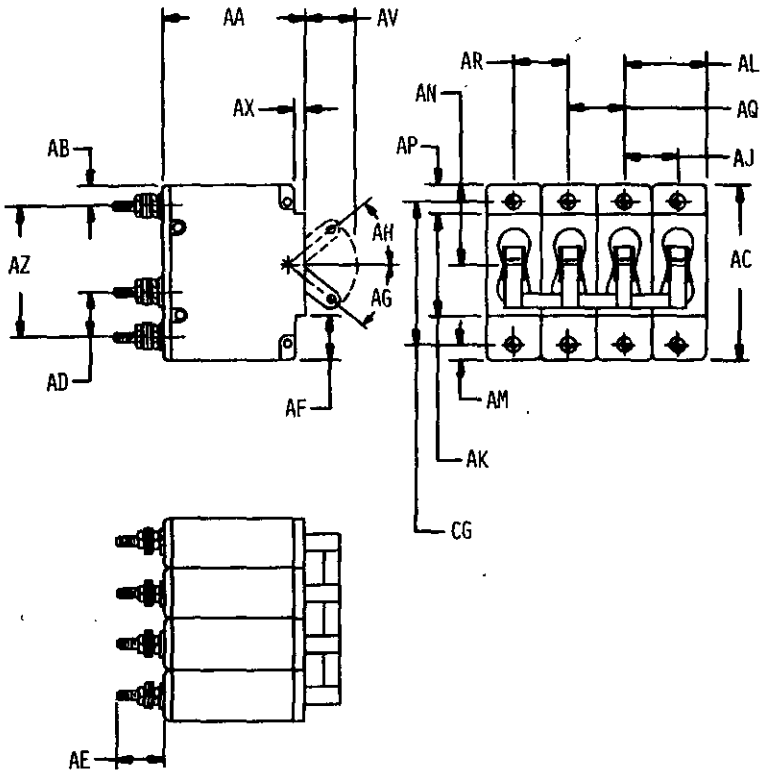


052-18-9

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

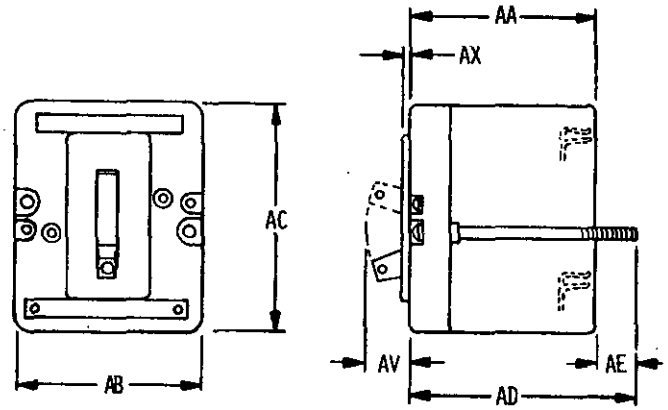


Ø52-19-1

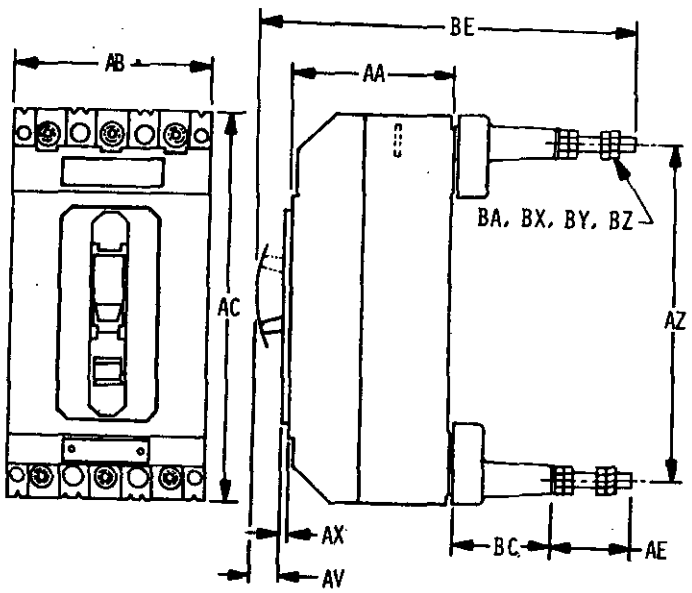


Ø52-19-2

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

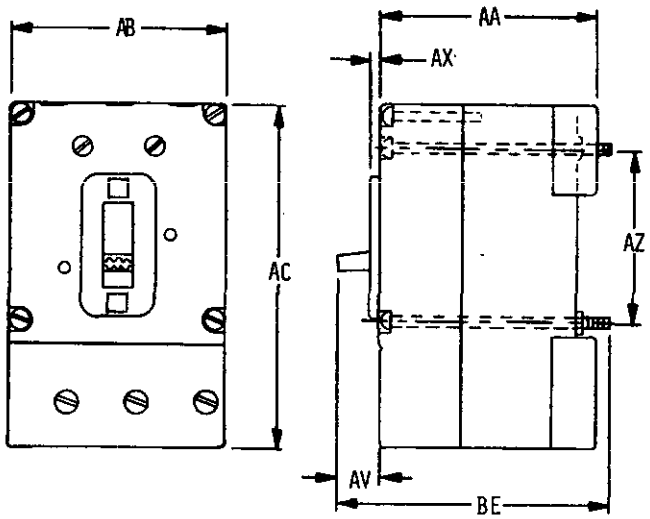


052-19-3

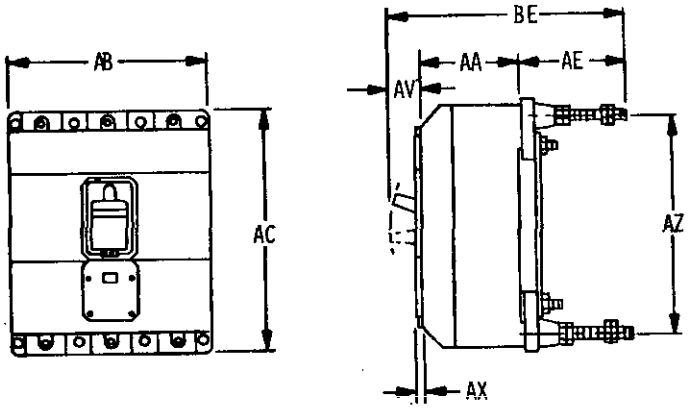


052-19-4

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

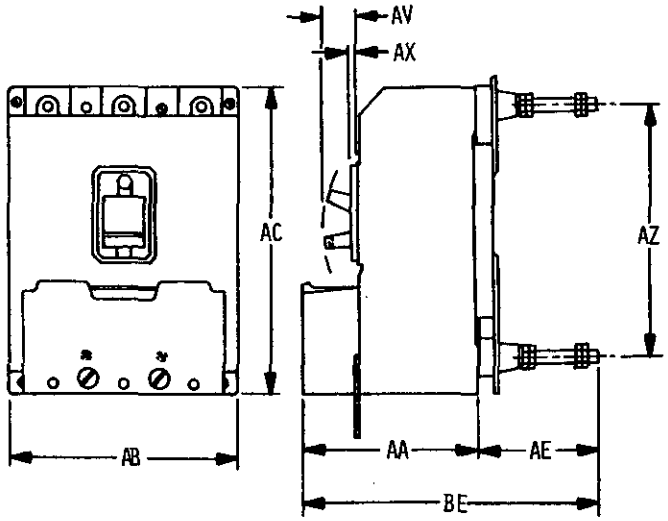


Ø52-19-5

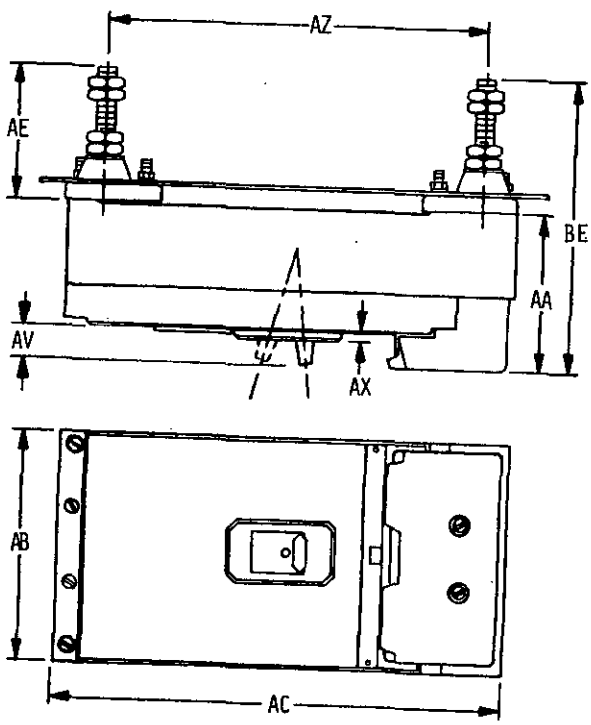


Ø52-19-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

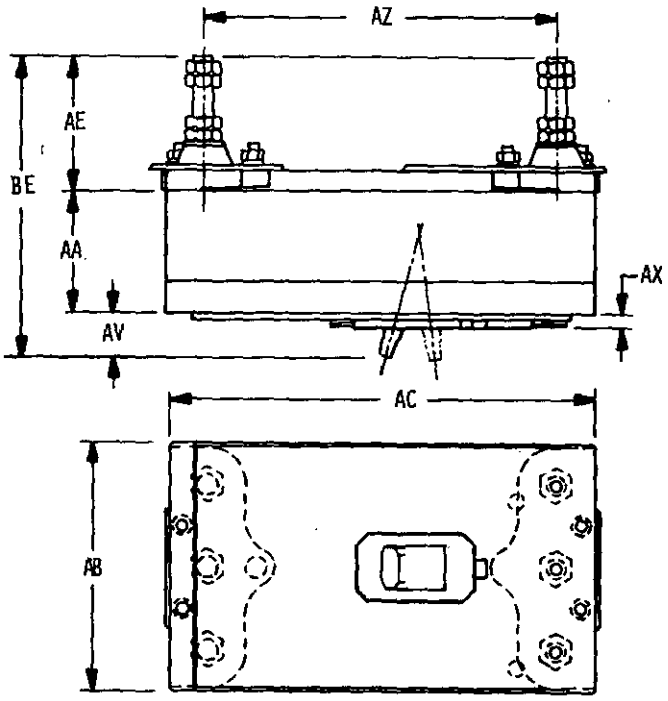


052-19-7

Source: https://assist.dla.mil/ Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

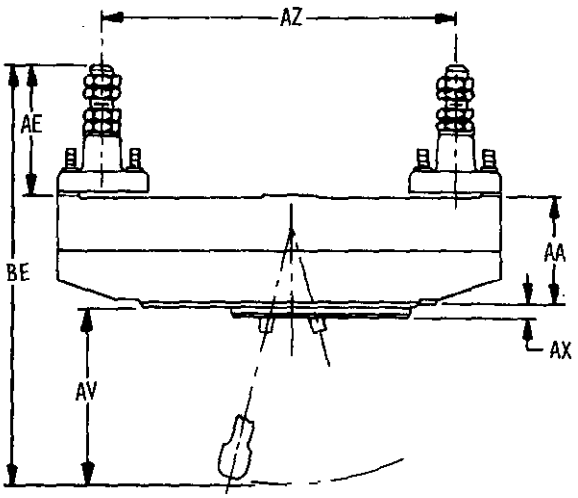


052-19-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

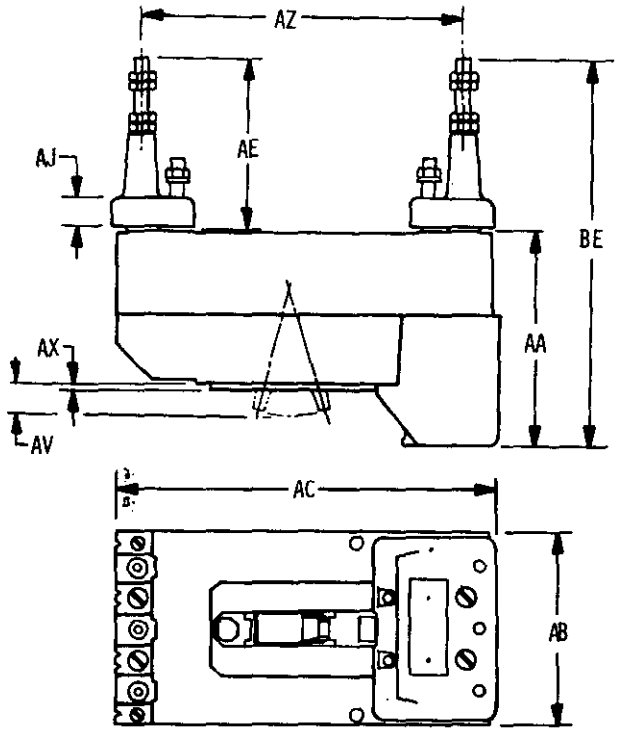


B52-19-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

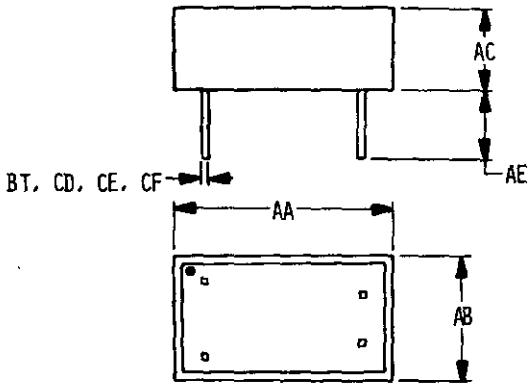


052-20-1

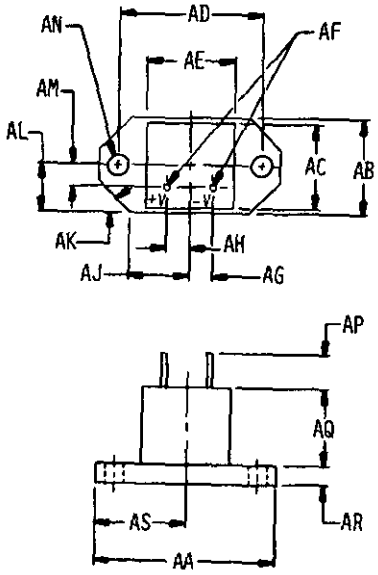


052-21-1

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currentversion before use.



052-22-1



052-22-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	12	1406	84	1467	138	1538	142
0102	12	1407	78	1468	108	1539	100
0103	12	1410	128	1469	134	1545	142
0104	12	1411	128	1470	138	1546	142
0105	12	1412	130	1471	112	1547	32
0107	14	1413	130	1473	134	1548	34
0108	14	1414	130	1475	136	1549	34
0700	12	1416	130	1476	138	1550	106
0800	12	1418	128	1477	70	1551	112
1003	12	1419	128	1478	108	1552	134
1004	12	1420	130	1479	108	1553	138
1005	12	1421	130	1480	138	1557	34
1006	12	1426	142	1482	108	1558	34
1008	12	1427	142	1486	106	1562	16
1009	26	1428	142	1487	108	1564	16
1371	78	1429	84	1488	108	1566	16
1372	80	1430	144	1490	138	1568	16
1373	78	1431	142	1491	140	1570	16
1374	142	1432	84	1492	140	1572	28
1375	128	1433	128	1494	106	1574	28
1376	78	1435	142	1495	106	1576	28
1377	78	1436	142	1497	80	1577	28
1378	78	1438	142	1498	80	1578	28
1380	76	1439	144	1499	114	1580	28
1381	30	1442	136	1500	112	1600	36
1382	144	1444	136	1502	112	1604	38
1383	80	1446	134	1503	114	1606	38
1384	78	1447	134	1504	112	1608	38
1386	76	1448	134	1508	110	1610	38
1387	78	1449	86	1509	112	1612	38
1388	78	1451	106	1511	78	1614	38
1391	96	1452	144	1520	80	1616	38
1394	94	1453	144	1522	80	1618	38
1395	86	1455	134	1523	80	1620	38
1396	84	1456	134	1524	80	1622	40
1397	96	1457	142	1533	136	1624	40
1398	84	1459	144	1534	136	1626	40
1400	84	1462	144	1535	140	1628	40
1402	144	1464	106	1536	140	1630	40
1404	84	1466	138	1537	140	1632	40

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1634	40	1724	56	1822	64	1906	92
1636	40	1726	58	1824	64	1910	92
1638	40	1728	58	1826	68	1912	92
1640	40	1730	58	1828	68	1914	92
1642	42	1732	58	1830	68	1916	92
1644	42	1734	58	1832	68	1918	92
1646	42	1736	58	1834	68	1920	92
1648	42	1738	58	1836	68	1922	92
1650	42	1740	58	1838	68	1924	94
1652	42	1742	58	1840	74	1926	94
1654	42	1744	58	1842	74	1928	94
1656	42	1746	60	1844	76	1930	94
1658	42	1748	60	1846	76	1932	94
1660	42	1750	60	1848	76	1934	94
1670	44	1752	60	1850	76	1958	116
1672	44	1754	60	1852	82	1960	116
1674	44	1756	60	1854	82	1962	118
1676	44	1758	60	1860	84	1964	118
1678	44	1760	60	1862	84	1966	118
1680	44	1770	60	1864	88	1968	118
1682	44	1772	62	1866	88	1970	118
1684	44	1774	62	1868	88	1972	118
1686	44	1776	62	1870	88	1974	118
1690	54	1778	62	1872	88	1976	118
1692	54	1780	62	1874	88	1978	118
1694	54	1782	62	1876	88	1980	118
1696	54	1784	62	1878	88	1982	118
1698	54	1786	62	1880	88	1984	120
1700	54	1788	62	1882	88	1986	120
1702	56	1800	62	1884	88	2001	37
1704	56	1802	64	1886	90	2003	37
1706	56	1804	64	1888	90	2005	37
1708	56	1806	64	1890	90	2008	37
1710	56	1808	64	1892	90	2009	37
1712	56	1810	64	1894	90	2010	37
1714	56	1812	64	1896	90	2012	37
1716	56	1814	64	1898	90	2014	37
1718	56	1816	64	1900	90	2015	37
1720	56	1818	64	1902	90	2017	37
1722	56	1820	64	1904	92	2019	37

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2021	37	2091	37	2229	83	2354	132
2022	37	2092	37	2230	83	2356	132
2024	37	2094	37	2231	83	2360	146
2026	37	2096	37	2232	83	2362	146
2028	37	2098	37	2233	83	2364	146
2029	37	2100	37	2234	83	2366	146
2031	37	2101	37	2235	83	2368	148
2033	37	2102	37	2236	83	2370	148
2035	37	2103	37	2237	83	2372	148
2036	37	2104	37	2238	83	2374	148
2038	37	2105	37	2239	83	2376	148
2040	37	2200	83	2240	83	2378	148
2042	37	2201	83	2241	83	2500	66
2043	37	2202	83	2242	83	2502	66
2045	37	2203	83	2243	83	2504	66
2047	37	2204	83	2244	83	2506	66
2049	37	2205	83	2300	120	2508	68
2050	37	2206	83	2302	120	2510	68
2052	37	2207	83	2304	120	2520	106
2054	37	2208	83	2310	120	2522	106
2056	37	2209	83	2312	120	2530	112
2057	37	2210	83	2314	120	2532	112
2059	37	2211	83	2316	120	2540	134
2061	37	2212	83	2320	126	2542	134
2063	37	2213	83	2322	126	2550	138
2064	37	2214	83	2324	126	2552	138
2066	37	2215	83	2326	126	2560	146
2068	37	2216	83	2328	126	2562	146
2070	37	2217	83	2330	126	3700	122
2071	37	2218	83	2332	126	3702	124
2073	37	2219	83	2334	126	4132	108
2075	37	2220	83	2336	126	4133	108
2077	37	2221	83	2338	126	4134	110
2078	37	2222	83	2340	128	4135	110
2080	37	2223	83	2342	128	4136	110
2082	37	2224	83	2344	132	4137	110
2084	37	2225	83	2346	132	4138	110
2085	37	2226	83	2348	132	4139	110
2087	37	2227	83	2350	132	4142	110
2089	37	2228	83	2352	132	4143	110

Source: https://assist.dla.mil Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4144	110	4726	130	4798	70	4878	96
4146	110	4729	140	4799	70	4884	46
4147	110	4730	140	4803	70	4885	46
4662	116	4731	140	4805	70	4886	46
4663	116	4732	142	4809	74	4890	72
4664	116	4734	100	4810	74	4891	48
4665	116	4735	104	4811	74	4892	32
4666	116	4736	102	4812	74	4893	34
4667	116	4737	102	4813	70	4894	46
4669	96	4738	102	4814	74	4897	54
4671	96	4739	102	4815	70	4900	48
4672	114	4740	102	4819	74	4901	46
4674	114	4741	102	4820	74	4902	50
4675	114	4742	102	4822	74	4904	18
4677	114	4743	104	4825	74	4905	18
4678	146	4745	100	4842	52	4906	46
4683	116	4746	100	4844	52	4908	46
4684	112	4748	100	4845	52	4950	26
4685	112	4749	104	4846	52	4952	98
4686	112	4750	104	4847	50	4956	100
4689	94	4751	104	4848	52	4958	98
4691	96	4752	104	4849	46	4959	98
4692	96	4754	66	4850	52	4960	100
4694	96	4755	66	4853	72	4969	72
4695	96	4756	66	4854	52	4970	72
4698	96	4760	66	4855	52	4971	72
4700	94	4761	66	4856	50	4975	146
4701	94	4762	66	4859	48	4975	146
4703	112	4765	98	4861	50	4977	146
4707	136	4766	98	4862	50	4978	140
4708	136	4770	98	4863	32	4979	140
4709	136	4771	98	4864	32	4980	86
4713	132	4772	98	4865	32	4981	86
4714	132	4773	98	4867	52	4983	86
4715	132	4782	96	4868	32	4984	86
4717	54	4788	72	4869	52	4985	86
4718	94	4790	72	4870	52	4986	86
4719	132	4791	70	4872	100	4989	96
4722	130	4793	72	4874	50	4991	86
4723	130	4795	70	4875	50	5000	52

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
5046	18	6251	32	6870	148	7604	22
5048	18	6263	34	6873	12	7605	22
5052	18	6264	34	6874	14	7609	22
5054	18	6265	34	6941	14	7610	22
5060	16	6267	54	6942	14	7611	22
5061	16	6272	30	6991	150	7612	24
5062	16	6273	30	6992	150	7613	24
5063	16	6277	32	6993	150	7614	24
5068	18	6280	48	6994	150	7618	24
5069	18	6292	48	6995	150	7619	24
5070	18	6293	48	6996	30	7620	24
5071	18	6294	48	6997	30	7621	24
6200	134	6296	128	6998	30	7622	24
6201	140	6299	100	6999	30	7623	24
6202	72	6300	46	7001	148	7627	24
6203	138	6308	48	7002	148	7629	150
6204	114	6310	50	7003	148	7630	150
6205	116	6311	48	7004	148	7631	20
6206	72	6312	48	7005	148	7632	20
6207	72	6315	124	7021	30	7633	20
6210	34	6316	124	7022	28	7634	20
6217	122	6318	122	7023	28	7635	20
6219	122	6319	124	7024	30	7636	20
6220	122	6320	102	7301	18	7637	22
6221	122	6321	102	7312	18	7638	22
6222	122	6322	102	7345	32	7639	22
6224	122	6323	102	7572	26	7645	20
6225	122	6324	104	7576	26	7646	20
6226	32	6325	104	7577	26	7647	22
6228	122	6326	104	7580	28		
6229	122	6328	104	7591	20		
6231	124	6329	104	7592	20		
6233	32	6330	104	7594	20		
6234	124	6331	104	7595	20		
6235	124	6332	106	7597	20		
6236	124	6333	106	7598	20		
6237	124	6359	76	7600	22		
6238	124	6369	12	7601	22		
6239	34	6370	106	7602	22		
6250	32	6372	150	7603	22		

Source: https://assist.dla.mil/ Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Acceleration	30
Additional Part Marking	150
Additional Requirements	148
Altitude Rating	16
Aperture Cards Required	14
Applicable Documents	150
Base Document	12
Calibration	36
City, State, Zip	12
Classification	16
Company Name/Command	12
Configuration	26
Contact Resistance	38
Contract Number/Office Symbol	12
Control, Source	12
Control, Specification	14
Coordination	44
Current Rating	20
Date	12
Definition of Hermetic Sealing	150
Design and Construction	28
Dielectric Withstanding Voltage at Reduced Barometric Pressure	46
Dielectric Withstanding Voltage at Sea Level	50
Electromagnetic Interference	54
Enclosure	28
Endurance, Electrical	56
Endurance, Mechanical	60
Explosion	62
Finishes	26
Format	12
Frequency Rating	24
Fungus	66
Government Design Activity FSCM	12
Hold-In Capacity	68
Humidity	70
Illustrations	26
Immersion	74

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Inclination	74
Insulation Resistance	76
Interrupting Capacity (Rupture Capacity, Short Circuit)	82
Materials	26
Metals	28
Moisture Resistance	84
Mounting Hardware	148
Nomenclature	150
Notes	150
Operating Force	88
Overload	90
Packaging	150
Part Marking	150
Part Number	14
Part Number Cross-Reference	150
Phone Number	12
Power Rating	20
Quality Assurance Provisions	150
Reclosing	92
Requester FSCM	12
Requester's Name	12
Resistance to Soldering Heat	94
Revision of AEDPS Document (Number)	14
Salt Spray	96
Sand and Dust	98
Scope	14
Seal	100
Shock, High Impact	106
Shock, Specified Pulse	110
Solderability	114
Source Table	14
Street/Building	12
Strength of Actuating Means	116
Strength of Mounting Means	120
Superseded Document	150
System Application	12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Tabulated Characteristics	26
Temperature, High	122
Temperature, Low	122
Temperature Rating	18
Temperature Rise	126
Terminal Strength	128
Thermal Shock (Temperature Cycling)	130
Transient Susceptibility	132
Units of Measure	14, 26
Vibration, High Frequency	134
Vibration, Low Frequency	136
Vibration, Random	142
Voltage Rating	22
Waterproofness	146
Weight	28
Workmanship	148

☆U.S. GOVERNMENT PRINTING OFFICE: 1979—603-022:1094
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-30A(MI), dated 15 February 1979 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-30A(MI), dated 15 February 1979 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not *constitute or imply authorization to waive any* portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

DOD STD-35-30A(MI) CIRCUIT BREAKER

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander,
U.S. Army Missile R & D Command
ATTN: DRDMI-ESD
Redstone Arsenal, AL 35809

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.