DOD-STD-35-31A(MI)
23 March 1979
SUPERSEDING
MIL-STD-35-31(MI)
21 DECEMBER 1973

MILITARY STANDARD

BOLTS AND STUDS

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

FSC EDS

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Bolts and Studs
Automated Engineering
Document Preparation System

DOD-STD-35-31A(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-31A(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for Bolts and Studs.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document *(DOD-STD-35D and subsequent revisions) be followed explicitly in order* to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	33
	2.1	Issues of documents	33
	2.2	Other publications	34
	3.	DEFINITIONS	36
	4.	GENERAL REQUIREMENTS	37
	4.1	Introduction	37
	4.2	Specification Requirement Sheet (SRS)	37
	4.3	Configuration	37
	4.3.1	Dimensions	37
	4.3.2	Illustrations	37
	4.4	Units of measure	37
	5.	DETAILED REQUIREMENTS	38
	5.1	Introduction	38
	5.2	MSE Formats	38
	5.3	Referenced documents	38
	5.4	Test matrix	38
	5.5	Tabulation	40
	5.6	Keyword Code Index (KCI) and Standard Paragraphs	41
	5.6.1	Interrelationship of Codes	41
	5.6.2	Automatic MSE Data	41
	5.6.3	DOD-STD-35 Tables	41

TABLES

Tables	I.	Title Index	2
	II.	Test matrix	39
	III.	Tabulation candidates	40

APPENDIXES

Appendix	A.	Illustrations	104
	B.	Characteristic Code Index	121
		Index	124

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS) provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for Bolts and Studs.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. It is recommended that MIL-STD-1598, Studs Preferred for Design, Listing of, be reviewed prior to using this dash-numbered part book for studs.

The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
BOLTS, AIRCRAFT	152001	MIL-B-6812	
		MS20073	DRILLED HD, FINE THD
		MS20074	DRILLED HD, CRS THD
		AN3 THRU AN20	MACHINE
		AN173 THRU AN186	CLOSE TOL
BOLTS, CARRIAGE	152002	MIL-H-55053	POLE LINE HDW
		MS20069	POLE LINE
BOLTS, CLEVIS	152003	AN21 THRU AN36	
BOLTS, EYE	152004	AN42 THRU AN49	
		FF-T-791	TURNBUCKLE
		MS27950	TURNBUCKLE, GP
		MIL-H-55053	POLE LINE HDW
		MS35796	THIMBLE, STR
		MS35797	THIMBLE, BENT
		MIL-B-45908	SHOULDER
		MS51937	SHOULDER
BOLTS	152005	FF-B-584	
		MIL-F-8975	FASTENERS (BOLTS) BLIND H STR INSTL FORMED
		MIL-B-52209	ASSEMBLIES, HOOK, TIE
		MS16204	FLH, UNC-2A, NMAG

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
BOLTS	152005 (CONT)	NAS498 NAS464 NAS333 THRU NAS340	SHEAR SHEAR CL TOL 100 DEG CL TOL H STR
		NAS501	STABILIZED NMAG CL TOL
		NAS563 THRU NAS572	FULLY THD, FULLY IDENTIFIED HD ALLOY STL
		NAS621 NAS673 THRU NAS678	CL TOL HEX HD TITANIUM, .190 TO .500
		NAS1266 THRU NAS1270	LOCK, HEX HD CL TOL
		NAS2005	LOCK, TNSN PROTRUDING HD PULL TYPE
		NAS2105 THRU NAS2112	LOCK, TNSN 100 DEG (AN509) HD
		NAS2206 THRU NAS2210	LOCK, TENSION, PROTRUDING HD, STUMP TYPE
		NAS2306 THRU NAS2310	LOCK, TENSION, 100 DEGREE (AN509) HD, STUMP TYPE
		NAS2406 THRU NAS2412	LOCK, SHEAR PROTRUDING HD PULL TYPE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
BOLTS	152005	NAS2506 THRU NAS2512	LOCK, SHEAR, 100 DEGREE HD PULL TYPE
		NAS2606 THRU NAS2612	LOCK, SHEAR PROTRUDING HD, STUMP TYPE
		NAS2706 THRU NAS2712	LOCK, TNSN PULL TYPE
		NAS1589	FASTENER THREADED, CRSN AND HEAT RES
		NAS1578	SHEAR, PAN HD 1200, DEGREE F
		NAS1579	SHEAR, PAN HD 1200 DEGREE F
		NAS4002	ALLOY STL EXTLY THREADED
		NAS6203 THRU NAS6220	HEX HD, CL TOL ALLOY STL SHORT THD
		NAS6604 THRU NAS6620	HEX HD, CL TOL ALLOY STL L THD
		NAS4004	FSTNR, 6AL-4V TITANIUM ALLOY EXT THD
		NAS6403 THRU NAS6420	HEX HD CL TOL SHORT THD SLFLKG AND NONLKG

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
BOLTS	152005 (CONT)	NAS6804 THRU NAS6820	HEX HD CL TOL 6AL-4V LG THD SLFLKG AND NONLKG
BOLTS, FIRE BRICK ANCHOR	152006	MIL-B-15382	
BOLTS, HOOK-TURNBUCKLE	152007	FF-T-791 MS27593	GENERAL PURPOSE
BOLTS, INTERNAL WRENCHING	152008	MIL-B-7838 MS20004 THRU MS20024	160 KSI 160 AND 96 KSI
BOLTS, LAG	152009	FF-B-561 MS16201 MS16992 MIL-H-55053 MS35801	SLTD FLH, CONE PT NMAG HEX HD, GIMLET PT HDW, POLE LINE POLE LINE, FETTER DRIVE
BOLTS, MACHINE, DOUBLE HEX WASHER HEAD, FULL SHANK	152010	MS9110 MS9111 MS9112 MS9113 MS9932 MS9933 MS9934 MS9935 MS9936 MS9937 MS9938 MS9941 MS9942 MS9943	CL TOL .190-32 CL TOL .250-28 CL TOL .3125-24 CL TOL .375-24 CD PL .190-32 CD PL .250-28 CD PL .3125-24 CD PL .375-24 CD PL .4375-20 CD PL .500-20 CD PL .5623-18 CD PL .190-32, DRILLED CD PL .250-28, DRILLED CD PL .3125-24, DRILLED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
BOLTS, MACHINE, DOUBLE HEX WASHER HEAD, FULL SHANK	152010 (CONT)	MS9944	CD PL .375-24, DRILLED
		MS9945	CD PL .4375-20, DRILLED
		MS9947	CD PL .5625-18, DRILLED
BOLTS, MACHINE, DOUBLE HEX WASHER, PITCH DIAMETER SHANK	152011	MS9208	NI-CAD PL .190-32
		MS9209	NI-CAD PL .250-28
		MS9210	NI-CAD PL .3125-24
		MS9211	NI-CAD PL .375-24
		MS9212	NI-CAD .4375-20
		MS9213	NI-CAD PL .500-20
		MS9214	NI-CAD PL .5625-18
		MS9217	NI-CAD PL .190-32, DRILLED
		MS9218	NI-CAD PL .250-28, DRILLED
		MS9219	NI-CAD PL .3125-24, DRILLED
		MS9220	NI-CAD PL .375-24, DRILLED
		MS9221	NI-CAD PL .4375-20, DRILLED
		MS9222	NI-CAD PL .500-20, DRILLED
		MS9223	NI-CAD PL .5625-18

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
BOLTS, MACHINE, DOUBLE HEX WASHER, PITCH DIAMETER SHANK	152011 (CONT)	MS9556	AMS 5731, .190-32
		MS9557	AMS 5731, .250-28
		MS9558	AMS 5731, .3125-24
		MS9559	AMS 5731, .375-24
		MS9560	AMS 5731, .4375-20
		MS9561	AMS 5731, .500-20
		MS9562	AMS 5731, .5625-18
		MS9565	AMS 5731, .190-32, DRILLED
		MS9566	AMS 5731, .250-28, DRILLED
		MS9567	AMS 5731, .3125-24, DRILLED
		MS9568	AMS 5731, .375-24, DRILLED
		MS9569	AMS5731, .4375-20
		MS9570	AMS 5731, .500-20
		MS9571	AMS 5731, .5625-18
		MS9574	SIL PLD, .190-32, DRILLED
		MS9575	SIL PLD, .250-28, DRILLED
		MS9576	SIL PLD, .3125-24, DRILLED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
BOLTS, MACHINE, DOUBLE HEX WASHER, PITCH DIAMETER SHANK	152011 (CONT)	MS9577	SIL PLD, .375-24, DRILLED
		MS9578	SIL PLD, .4375-20, DRILLED
		MS9579	SIL PLD, .500-20, DRILLED
		MS9580	SIL PLD, .5625-18, DRILLED
		MS9676	AMS 5731, CUPWASHER LKD, .190-32
		MS9677	AMS 5731, CUPWASHER LKD, .250-28
		MS9678	AMS 5731, CUPWASHER LKD, .3125-24
		MS9679	AMS 5731, CUPWASHER LKD, .375-24
		MS9680	CAD PLATED, CUPWASHER LKD, .190-32
		MS9681	CAD PLATED, CUPWASHER LKD, .250-28
		MS9682	CAD PLATED, CUPWASHER LKD, .3125-24
		MS9683	CAD PLATED, CUPWASHER LKD, .375-24
		MS9696	AMS 5708, .190-32
		MS9697	AMS 5708, .250-28
		MS9698	AMS 5708, .3125-24

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
BOLTS, MACHINE, DOUBLE HEX WASHER, PITCH DIAMETER SHANK	152011 (CONT)	MS9699	AMS 5708, .375-24
		MS9700	AMS 5708, .4375-20
		MS9701	AMS 5708, .500-20
		MS9702	AMS 5708, .5625-18
		MS9705	AMS 5708, .190-32, DRILLED
		MS9706	AMS 5708, .250-28, DRILLED
		MS9707	AMS 5708, .3125-24, DRILLED
		MS9708	AMS 5708, .375-24, DRILLED
		MS9709	AMS 5708, .4375-20, DRILLED
		MS9710	AMS 5708, .500-20, DRILLED
		MS9711	AMS 5708, .5625-18, DRILLED
		MS9714	SIL PLD, .190-32, DRILLED
		MS9715	SIL PLD, .250-28, DRILLED
		MS9716	SIL PLD, .3125-24, DRILLED
		MS9717	SIL PLD, .375-24, DRILLED

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
BOLTS, MACHINE, DOUBLE HEX WASHER, PITCH DIAMETER SHANK	152011 (CONT)	MS9718	SIL PLD, .4375-20, DRILLED
		MS9719	SIL PLD, .500-20, DRILLED
		MS9720	SIL PLD, .5625-18, DRILLED
		MS9732	CRES AMS 5643, .190-32
		MS9733	CRES AMS 5643, .250-28
		MS9734	CRES AMS 5643, .3125-24
		MS9735	CRES AMS 5643, .375-24
		MS9736	CRES AMS 5643, .4375-20
		MS9737	CRES AMS 5643, .500-20
		MS9738	CRES AMS 5643, .5625-18
		MS9741	CRES AMS 5643, .190-32, DRILLED
		MS9742	CRES AMS 5643, .250-28, DRILLED
		MS9743	CRES AMS 5643, .3125-24, DRILLED
		MS9744	CRES AMS 5643, .375-24, DRILLED
		MS9745	CRES AMS 5643, .4375-20, DRILLED
		MS9746	CRES AMS 5643, .500-20, DRILLED

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
BOLTS, MACHINE, DOUBLE HEX WASHER, PITCH DIAMETER SHANK	152011 (CONT)	MS9747	CRES AMS 5643, .5625-18, DRILLED
		MS9750	TITANIUM AMS 4967, .190-32
		MS9751	TITANIUM AMS 4967, .250-28
		MS9752	TITANIUM AMS 4967, .3125-24
		MS9753	TITANIUM AMS 4967, .375-24
		MS9754	TITANIUM AMS 4967, .4375-20
		MS9755	TITANIUM AMS 4967, .500-20
		MS9756	TITANIUM AMS 4967, .5625-18
		MS9759	TITANIUM AMS 4967, .190-32, DRILLED
		MS9760	TITANIUM AMS 4967, .250-28, DRILLED
		MS9761	TITANIUM AMS 4967, .3125-24, DRILLED
		MS9762	TITANIUM AMS 4967, .375-24, DRILLED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
BOLTS, MACHINE, DOUBLE HEX WASHER, PITCH DIAMETER SHANK	152011 (CONT)	MS9763	TITANIUM AMS 4967, .4375-20, DRILLED
		MS9764	TITANIUM AMS 4967, .500-20, DRILLED
		MS9765	TITANIUM AMS 4967, .5625-18, DRILLED
		MS9885	AMS 5616, .190-32
		MS9886	AMS 5615, .250-28
		MS9887	AMS 5616, .375-24
		MS9889	AMS5616, .4375-20
		MS9890	AMS 5616, .500-20
		MS9891	AMS 5616, .5625-18
		MS9894	AMS 5616, .190-32, DRILLED
		MS9895	AMS 5616, .250-28, DRILLED
		MS9896	AMS 5616, .3125-24, DRILLED
		MS9897	AMS 5616, .375-24, DRILLED
		MS9898	AMS 5616, .4375-20, DRILLED
		MS9899	AMS 5616, .500-20, DRILLED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
BOLTS, MACHINE, DOUBLE HEX WASHER, PITCH DIAMETER SHANK	152011 (CONT)	MS9900	AMS 5616, .5625-18, DRILLED
		MS9914	CAD PLD, .190-32
		MS9915	CAD PLD, .250-28
		MS9916	CAD PLD, .3125-24
		MS9917	CAD PLD, .375-24
		MS9918	CAD PLD, .4375-20
		MS9919	CAD PLD, .500-20
		MS9920	CAD PLD, .5625-18
		MS9923	CAD PLD, .190-32, DRILLED
		MS9925	CAD PLD, .3125-24, DRILLED
		MS9926	CAD PLD, .375-24, DRILLED
		MS9927	CAD PLD, .4375-20, DRILLED
		MS9928	CAD PLD, .500-20, DRILLED
		MS9929	CAD PLD, .5625-18, DRILLED
		MS21279	CONTROLLED ROOT RAD, .190-32
		MS21280	CONTROLLED ROOT RAD, .250-28
		MS21281	CONTROLLED ROOT RAD, .3125-24

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
BOLTS, MACHINE, DOUBLE HEX WASHER, PITCH DIAMETER SHANK	152011 (CONT)	MS21282	CONTROLLED ROOT RAD, .375-24
		MS21283	CONTROLLED ROOT RAD, .4375-20
		MS21284	CONTROLLED ROOT RAD, .500-20
		MS21285	CONTROLLED ROOT RAD, .5625-18
		MS21288	CONTROLLED ROOT RAD, .190-32, DRILLED
		MS21289	CONTROLLED ROOT RAD, .250-28, DRILLED
		MS21290	CONTROLLED ROOT RAD, .3125-24, DRILLED
		MS21291	CONTROLLED ROOT RAD, .375-24, DRILLED
		MS21292	CONTROLLED ROOT RAD, .4375-20, DRILLED
		MS21293	CONTROLLED ROOT RAD, .500-20, DRILLED
		MS21294	CONTROLLED ROOT RAD, .5625-18, DRILLED
BOLTS, MACHINE, HEX HEAD, FULL SHANK	152012	MIL-B-7874	1200 DEGREES F
		MS9489	CRES, .190-32
		MS9490	CRES, .250-28
		MS9491	CRES, .3125-24
		MS9492	CRES, .375-24
		MS9493	CRES, .4375-20
		MS9494	CRES, .500-20
		MS9495	CRES, .5625-18
		MS9496	CRES, .625-18
		MS9497	CRES, .750-16

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
BOLTS, MACHINE, HEX HEAD, FULL SHANK	152012 (CONT)	MS9500	CRES, .190-32, DRILLED
		MS9501	CRES, .250-28, DRILLED
		MS9502	CRES, .3125-24, DRILLED
		MS9503	CRES, .375-24, DRILLED
		MS9504	CRES, .4375-20, DRILLED
		MS9505	CRES, .500-20, DRILLED
		MS9506	CRES, .5625-18, DRILLED
		MS9507	CRES, .625-18, DRILLED
		MS9508	CRES, .750-16, DRILLED
		MS9529	CAD PLD, .190-32, DRILLED
		MS9583	CRES, .190-32, DRILLED 6 HOLES
		MS9584	CRES, .250-28, DRILLED 6 HOLES
		MS9585	CRES, .3125-24, DRILLED 6 HOLES
		MS9586	CRES, .375-24, DRILLED 6 HOLES
		MS9587	CRES, .4375-20, DRILLED 6 HOLES
		MS9588	CRES, .500-20, DRILLED 6 HOLES
		MS9589	CRES, .5625-18, DRILLED 6 HOLES
		MS9590	CRES, .025-18, DRILLED 6 HOLES
		MS9591	CRES, .750-16, DRILLED 6 HOLES
		MS9642	TITANIUM, .190-32, DRILLED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
BOLTS, MACHINE, HEX HEAD, FULL SHANK	152012 (CONT)	MS9643	TITANIUM, .250-28, DRILLED
		MS9644	TITANIUM, .3125-24, DRILLED
		MS9645	TITANIUM, .375-24, DRILLED
		MS9646	TITANIUM, .4375-20, DRILLED
		MS9647	TITANIUM, .500-20, DRILLED
		MS9648	TITANIUM, .5625-18, DRILLED
		MS9651	TITANIUM, .190-32
		MS9652	TITANIUM, .250-18
		MS9653	TITANIUM, .3125-24
		MS9654	TITANIUM, .375-24
		MS9655	TITANIUM, .4375-20
		MS9656	TITANIUM, .500-20
		MS9657	TITANIUM, .5625-18
		MS9783	AMS 5643, .190-32
		MS9784	AMS 5643, .250-28
		MS9785	AMS 5643, .3125-24
		MS9786	AMS 5643, .375-24
		MS9787	AMS 5643, .4375-20

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
BOLTS, MACHINE, HEX HEAD, FULL SHANK	152012 (CONT)	MS9788	AMS 5643, .500-20
		MS9789	AMS 5643, .5625-18
		MS9790	AMS 5643, .625-18
		MS9791	AMS 5643, .750-16
		MS9794	AMS 5643, .190-32, DRILLED
		MS9795	AMS 5643, .250-28, DRILLED
		MS9796	AMS 5643, .3125-24, DRILLED
		MS9797	AMS 5643, .375-24, DRILLED
		MS9798	AMS 5643, .4375, DRILLED
		MS9799	AMS 5643, .500-20, DRILLED
		MS9800	AMS 5643, .5625-20, DRILLED
		MS9801	AMS 5643, .625-18, DRILLED
		MS9802	AMS 5643, .750-16, DRILLED
		MS9964	DRILLED, 6 HOLE
		MS16205	SILICON BRONZE, NMAG
		MS16206	ALUMINUM, NMAG
		MS16208	CRES, NMAG 1200 DEG F
		NAS1003 THRU NAS1020	NMAG AND HEAT RES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
BOLTS, MACHINE, HEX HEAD, PITCH DIAMETER SHANK	152013	MS20033 THRU MS20046	1200 DEG F
		MS9283	BLACK OXIDE, .190-32
		MS9284	BLACK OXIDE, .250-28
		MS9285	BLACK OXIDE, .3125-24
		MS9286	BLACK OXIDE, .375-24
		MS9294	BLACK OXIDE, .190-32, DRILLED
		MS9295	BLACK OXIDE, .250-28, DRILLED
		MS9296	BLACK OXIDE, .3125-24, DRILLED
		MS9297	BLACK OXIDE, .375-24, DRILLED
		MS9440	NI-CAD PLD, .190-32, DRILLED
		MS9441	NI-CAD PLD, .250-28, DRILLED
		MS9442	NI-CAD PLD, .3125-24, DRILLED
		MS9443	NI-CAD PLD, .375-24, DRILLED
		MS9444	NI-CAD PLD, .4375-20, DRILLED
		MS9445	NI-CAD PLD, .500-20, DRILLED
		MS9446	NI-CAD PLD, .5625-18, DRILLED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
BOLTS, MACHINE, HEX HEAD, PITCH DIAMETER SHANK	152013 (CONT)	MS9447	NI-CAD PLD, .625-18, DRILLED
		MS9448	NI-CAD PLD, .750-16, DRILLED
		MS9451	NI-CAD PLD, .190-32
		MS9452	NI-CAD PLD, .250-28
		MS9453	NI-CAD PLD, .3125-24
		MS9454	NI-CAD PLD, .375-24
		MS9455	NI-CAD PLD, .4375-20
		MS9456	NI-CAD PLD, .500-20
		MS9457	NI-CAD PLD, .5625-18
		MS9458	NI-CAD PLD, .625-18
		MS9459	NI-CAD PLD, .750-16
		MS9518	CAD PLD, .190-32
		MS9519	CAD PLD, .250-28
		MS9520	CAD PLD, .3125-24
		MS9521	CAD PLD, .375-24
		MS9522	CAD PLD, .4375-20
		MS9523	CAD PLD, .500-20
		MS9524	CAD PLD, .5625-18
		MS9525	CAD PLD, .625-18
		MS9526	CAD PLD, .750-16

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
BOLTS, MACHINE, HEX HEAD, PITCH DIAMETER SHANK	152013 (CONT)	MS9530	CAD PLD, .250-28, DRILLED
		MS9531	CAD PLD, .3125-24, DRILLED
		MS9532	CAD PLD, .375-24, DRILLED
		MS9533	CAD PLD, .4375-20, DRILLED
		MS9534	CAD PLD, .500-20, DRILLED
		MS9535	CAD PLD, .5625-18, DRILLED
		MS9536	CAD PLD, .625-18, DRILLED
		MS9537	CAD PLD, .750-16, DRILLED
		MS9624	TITANIUM, .190-32, DRILLED
		MS9625	TITANIUM, .250-28, DRILLED
		MS9626	TITANIUM, .3125-24, DRILLED
		MS9627	TITANIUM, .375-24, DRILLED
		MS9628	TITANIUM, .4375-20, DRILLED
		MS9629	TITANIUM, .500-20, DRILLED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
BOLTS, MACHINE, HEX HEAD, PITCH DIAMETER SHANK	152013 (CONT)	MS9630	TITANIUM, .5625-18, DRILLED
		MS9633	TITANIUM, .190-32
		MS9634	TITANIUM, .250-28
		MS9635	TITANIUM, .3125-24
		MS9636	TITANIUM, .375-24
		MS9637	TITANIUM, .4375-20
		MS9638	TITANIUM, .500-20
		MS9639	TITANIUM, .5625-18
		MS9685	NI-CAD PL, .190-32, DRILLED
		MS9686	NI-CAD PL, .250-28, DRILLED
		MS9687	NI-CAD PL, .3125-24, DRILLED
		MS9688	NI-CAD PL, .375-24, DRILLED
		MS9689	NI-CAD PL, .4375-20, DRILLED
		MS9690	NI-CAD PL, .500-20, DRILLED
		MS9691	NI-CAD PL, .5625-18, DRILLED
		MS9692	NI-CAD PL, .625-18, DRILLED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
BOLTS, MACHINE, HEX HEAD, PITCH DIAMETER SHANK	152013 (CONT)	MS9693	NI-CAD PL, .750-16, DRILLED
		MS9805	CRES, .190-32
		MS9806	CRES, .250-28
		MS9807	CRES, .3125-24
		MS9808	CRES, .375-24
		MS9809	CRES, .4375-20
		MS9810	CRES, .500-20
		MS9811	CRES, .5625-18
		MS9812	CRES, .625-18
		MS9813	CRES, .750-16
		MS9816	CRES, .190-32, DRILLED
		MS9817	CRES, .250-28, DRILLED
		MS9818	CRES, .3125-24, DRILLED
		MS9819	CRES, .375-24, DRILLED
		MS9820	CRES, .4375-20, DRILLED
		MS9821	CRES, .500-20, DRILLED
		MS9822	CRES, .5625-18, DRILLED
		MS9823	CRES, .625-18, DRILLED
		MS9824	CRES- .750-16, DRILLED
BOLTS, MACHINE, HEX AND SQUARE HEAD	152014	FF-B-575	BOLT, HEX AND SQUARE
		MS35355	CAP ON ZINC PL
		MS35356	PHOS COATED
BOLTS, MACHINE, SQUARE HEAD	152015	MIL-H-55053	HDW, POLE LINE
		MS35798	GALVANIZED (POLE LINE)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
BOLTS, MACHINE, TENSILE	152016	MIL-B-8831	180 KSI, EXT WR, FLGD HD
		MIL-B-8906	220 KSI, EXT WR, FLGD HD
		MIL-B-8907	260 KSI, EXT WR, FLGD HD
		MS21250	180 KSI, EXT WR, FLGD HD
BOLTS, MACHINE, 12 POINT HEAD	152017	MS9088	CAD PLD, .190-32, DRILLED
		MS9089	CAD PLD, .250-28, DRILLED
		MS9090	CAD PLD, .3125-24, DRILLED
		MS9091	CAD PLD, .375-24, DRILLED
		MS9093	CAD PLD, .500-20, DRILLED
		MS9146	CAD PLD, .190-32
		MS9147	CAD PLD, .250-28
		MS9148	CAD PLD, .3125-24
		MS9149	CAD PLD, .375-24
		MS9150	CAD PLD, .4375-20
		MS9151	CAD PLD, .500-20
		MS9158	BLACK OXIDE, .250-28
		MS9160	BLACK OXIDE, .375-24
		MS9169	BLACK OXIDE, .190-32, DRILLED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
BOLTS, MACHINE, 12 POINT HEAD	152017 (CONT)	MS9170	BLACK OXIDE, .250-28, DRILLED
		MS9171	BLACK OXIDE, .3125-24, DRILLED
		MS9172	BLACK OXIDE, .375-24, DRILLED
		MS9173	BLACK OXIDE, .4375-20, DRILLED
		MS9174	BLACK OXIDE, .500-20, DRILLED
		MS9175	BLACK OXIDE, .5625-18, DRILLED
		MS9224	HEAT RES, .5625-18
BOLTS, SELF-LOCKING	152018	MIL-B-45912	BOLT, SLFLKG, HEX HEAD, STEEL
		MIL-B-23470	TRQ CONTROLLED
		MS21091	75 AND 125 KSI, FLUSH HEAD
		MS21092	48 AND 80 KSI, FLUSH HD, CRES
		MS21094	75 AND 125 KSI, HEX HD
		MS21095	48 AND 80 KSI, HEX HD, CRES
		MS21096	75 AND 125 KSI, PAN HEAD
		MS21097	48 AND 80 KSI, PAN HD, CRES
		MS21098	160 KSI, 12 POINT HEAD
		MS21099	80 KSI, 12 PT HEAD, CRES
		MS35764	HEX HD, GRADE 8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
BOLTS, SELF RETAINING	152019	MIL-B-83050	BOLT, SLFRTNG, IMPEDANCE TYPE
		MS27576	IMPEDANCE TYPE, 95 KSI, HEX HD
		MS27577	IMPEDANCE TYPE, 95 KSI, FL HD
		MS33602	DESIGN AND USAGE REQTS
BOLTS, SHOULDER	152020	MS21301	BOLT, SHOULDER GENERATOR
		MS13814	
		MS51946	RIBBED, SPLINED 3/4-INCH
		MS51949	WHEEL MOUNTING, KEYED HEAD
BOLTS, SQUARE NECK	152021	MS16207	CARRIAGE, COP SILICON, NMAG
		MS35754	CTSK (PLOW), CAD OR ZINC PLATED
BOLTS, TEE HEAD	152022	MIL-B-45887	BOLTS, TEE HEAD
		MS9397	CAD PLD, .190-32
		MS9398	CAD PLD, .250-28
		MS9399	CAD PLD, .3125-24
		MS9400	CAD PLD, .375-24
		MS9401	CAD PLD, .4375-20
		MS9402	CAD PLD, .500-20
		MS9432	AMS 5735, .190-32
		MS9433	AMS 5735, .3125-24
		MS9434	AMS 5735, .3125-24
		MS9435	AMS 5735, .375-24

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
BOLTS, TEE HEAD	152022 (CONT)	MS9436	AMS 5735, .4375-20
		MS9437	AMS 5735, .500-20
		MS90729	CSK HEAD
BOLTS, THIMBLE EYE	152023	MIL-H-55053	HDW POLE LINE
		MS35796	STR, POLE LINE
		MS35797	BENT, POLE LINE
BOLTS, TIBIAL	152024	MIL-B-36772	
BOLTS, TOGGLE	152025	FF-B-588	
BOLTS, TRACK	152026	MIL-B-3964	
		MS35474	OVAL NECK
BOLTS, TYPE I THROUGH V, STANDARD	152027	MIL-B-857	
BOLTS, WELDING	152028	MS51933	FINE THREAD
		MS51934	COARSE THREAD
BOLTS, WHEEL MOUNTING	152029	MS51947	SPLINED, .750 INCH
BOLT, TENSION	152030	MS21296	MP35N, 260 KSI FTU, 12 PT EXT WRNG, FLGD HD, 700 DEG F (371.1 DEG C)
STUDS, CONTINUOUS THREAD	152031	MIL-S-1222	HIGH TEMP
		MS16187	B16 ALLOY
STUDS, LOCKED IN	152032	MIL-S-45909	RING LOCKED
		MS51989	RING LKD, SERR
		MS51992	RING LKD, SERR, HIGH STRENGTH
		MIL-S-45915	KEY LKD, SERR
		MS51833	KEY LKD, LTWT
		MS51834	KEY LKD, HD

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
STUDS, LOCKED IN	152032 (CONT)	MIL-S-45933 MS51999	KEYRING LDK, 125 AND 160 KSI RING LKD, SERR, USAGE LIMITATIONS
STUDS, PLAIN	152033	FF-S-1362 MS51864	STUDS, PLAIN GENERAL PURPOSE
STUDS, SHOULDERED	152034	MS51950	WHEEL MOUNTING
STUDS, SHOULDERED, STEPPED	152035	MS51951	WHEEL MOUNTING
STUDS, STEPPED, 1.5 DIAMETER ENGAGEMENT	152037	AN150501 THRU AN150800	.250-20 X .190-32
		AN150801 THRU AN151100	.3125-18 X .250-28
		AN151101 THRU AN151400	.375-16 X .3125-24
		AN151401 THRU AN151700	.4375-14 X .375-24
		AN152601 THRU AN152900	DRILLED, .250-20 X .190-32
		AN152901 THRU AN153200	DRILLED, .3125-18 X .250-20

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
STUDS, STEPPED, 1.5 DIAMETER ENGAGEMENT	152037 (CONT)	MS17293	CONTROLLED ROOT RAD .250-20 X .190-32
		MS17294	CONTROLLED ROOT RAD .3125-18 X .250-28
		MS17295	CONTROLLED ROOT RAD .375-16 X .3125-24
		MS17296	CONTROLLED ROOT RAD .4375-14 X .375-24
		MS17297	CONTROLLED ROOT RAD, DRILLED, .3125-18 X .250-28
		MS17298	CONTROLLED ROOT RAD, DRILLED, .375-16 X .3125-24
STUDS, STEPPED, NECKED, 1.5 DIAMETER ENGAGEMENT	152038	AN158901 THRU AN159200	.4375-14 X .375-24
STUDS, STEPPED, 2.0 DIAMETER ENGAGEMENT	152039	AN154701 THRU AN155000	.250-20 X .190-32
		AN156801 THRU AN157100	DRILLED, .250-20 X .190-32
		MS9827	.250-20 X .190-32
		MS9828	.3125-18 X .250-28
		MS9829	.375-16 X .3125-24

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
STUDS, STEPPED, 2.0 DIAMETER ENGAGEMENT	152039 (CONT)	MS9830	.4375-14 X .375-24
		MS9831	.500-13 X .4375-20
		MS9832	.5625-12 X .500-20
		MS9833	.625-11 X .5625-18
		MS9834	DRILLED, .250-20 X .190-32
		MS9835	DRILLED, .3125-18 X .250-28
		MS9836	DRILLED, .375-16 X .3125-24
		MS9837	DRILLED, .4375-14 X .375-24
		MS9838	DRILLED, .500-13 X .4375-20
		MS9839	DRILLED, .5625-12 X .500-20
		MS9840	DRILLED, .625-11 X .5625-18
STUDS, STEPPED, NECKED, 2 DIAMETER ENGAGEMENT	152040	AN162501 THRU AN162800	DRILLED, .4375-14 X .375-24
STUDS, STRAIGHT	152041	MIL-S-24287	BOLT-STUD, NUTS ALLOY STEEL (FOR SERVICE TO 700 DEG F AND FATIGUE APPLS, ISSUE CONTD)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
STUDS, STRAIGHT	152041 (CONT)	MIL-S-24354	BOLT-STUD, BOLT NUT CRE AND NONFERROUS MATL (FOR FATIGUE OPNS, ISSUE CONTROLLED)
		AN126587 THRU AN126652	.375-16 X .375-24
		AN126881 THRU AN127192	NECKED, .375-16 X .375-24
		AN127193 THRU AN127492	NECKED, .4375-14 X .4375-20
		AN128363 THRU AN128686	DRILLED, .250-20 X .250-28
		AN128687 THRU AN128998	DRILLED, .3125-18 X .3125-24
		AN129293 THRU AN129604	DRILLED, NECKED, .375-16 X .375-24
		MS17299	CONTROLLED ROOT RAD, .190-24 X .190-32
		MS17300	CONTROLLED ROOT RAD, .250-20 X .250-28
		MS17301	CONTROLLED ROOT RAD, .3125-18 X .3125-24

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
STUDS, STRAIGHT	152041 (CONT)	MS17302	CONTROLLED ROOT RAD, DRILLED .250-20 X .250-28
		MS17303	CONTROLLED ROOT RAD, DRILLED .3125-18 X .3125-24
STUDS, WELDING	152042	MIL-S-24149	STUDS, WELDING
		FF-T-791	TURNBUCKLE
		MS27951	TURNBUCKLE
STUD, SELF-CLINCHING	152043	MS21326	STUD, SELF-CLINCHING

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

FEDERAL

FF-S-85	Screw, Caps, Slotted and Hexagon Head
FF-S-86	Screw, Cap, Socket Head
FF-S-1362	Stud, Plain, General Purpose
QQ-P-416	Plating, Cadmium (Electrodeposited)

MILITARY

MIL-B-857	Bolts, Nuts, and Studs
MIL-B-7838	Bolt, Internal Wrenching, 160 KSI Ftu
MIL-B-7874	Bolt, Machine, 1200° F
MIL-B-8831	Bolt, Tensile, Steel, 180 KSI Ftu, 450° F, External Wrenching, Flanged Head
MIL-B-8906	Bolt, Tensile, Steel, 220 KSI Ftu, 450° F External Wrenching, Flanged Head
MIL-B-8907	Bolt, Tensile, Steel, 260 KSI Ftu, 450° F External Wrenching, Flanged Head
MIL-B-45912	Bolt, Self-Locking, Hexagon Head, Steel
MIL-F-8961	Fastener, Externally Threaded, 450 Degree F and 1200 Degree F Self-Locking Design
MIL-F-18240	Fastener, Externally Threaded, 250° F Self-Locking Element For
MIL-I-17214	Indicator, Permeability, Low Mu (Go-No-Go)
MIL-S-7742	Fastener, Externally Threaded, 250° F Self-Locking Element For

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

MIL-S-45909	Stud, Locked In - Ring Lock Serrated
MIL-S-45915	Stud, Lock In - Key Locked
MIL-S-45933	Stud, Keyring Locked, 125 and 160 KSI, Ftu: General Specification For

STANDARDS

FEDERAL

FED-STD-151	Metal Test Methods

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-130	Identification Marking of Military Property
MIL-STD-1312	Fasteners, Test Methods
MIL-STD-1598	Studs, Preferred For Design, Listing Of

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ANSIB46.1	Surface Texture
ANSIB18.6.4	Slotted and Recessed Head Tapping Screws and Metallic Drive Screws

(Application for copies should be addressed to American National Standards Institute (ANSI), 1430 Broadway, New York, NY 10018.)

ASTMA370	Method and Definitions for Mechanical Testing of Steel Products
ASTME8	Tension Testing of Metallic Materials, Methods Of
ASTME10	Method of Test for Brinell Hardness of Metallic Materials

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

ASTME18	Rockwell Hardness and Rockwell Superficial Hardness of Metallic Materials, Test For
ASTME92	Method of Test for Vickers Hardness of Metallic Materials
ASTME112	Estimating the Average Grain Size of Metals
ASTME151	Tension Tests of Material at Elevated Temperatures with Rapid Heating and Conventional or Rapid Strain Rates, Recommended Practice For
ASTME380	Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, PA 19103.)

NAS621	Fasteners, Titanium Alloy Procurement Specification
NAS4002	Fasteners, Alloy Steel, Externally Threaded
NAS4003	Fasteners, A286 CRES, Externally Threaded
NAS4004	Fasteners, 6AL-4V Titanium Alloy Externally Threaded

(Application for copies should be addressed to the Aerospace Industries Association of America, Inc., 1825 DeSales Street, N.W., Washington, D.C. 20036.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Bolts and Studs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for Bolts or Studs, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Bolts and Studs.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Bolts and Studs.

4.3.2 Illustrations. Illustrations applicable to Bolts and Studs are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has a capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Test matrix. A test matrix is supplied as a guide for selecting documents to specify tests (see table II). The test matrix presents documents most applicable for use to satisfy the statement "TEST PER (DOC DES)". Any document listed in the Title Index may be used to satisfy the statement. However, the selected document from the Title Index must contain the desired test. Government test method documents and approved industry standards such as ASTM test methods may also be used to satisfy the statement "TEST PER (DOC DES)".

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE II. TEST MATRIX.

DOCUMENT	CODE	Carburization and Decarburization 2664	Chemical Analysis 2676	Ductility 1931	Fatigue Strength 2423	Grain Flow 2499	Hardness 2157	Hydrogen Embrittlement 2371	Resistance to Pullout 2491	Surface Defects 2773	Tensile Strength 2811	Thread Forming 2859	Torque, Locking 2639
FF-S-85		X	X							X			
FF-S-86				X									
FF-S-1362						X						X	
QQ-P-416							X	X					
FED-STD-H28												X	
MIL-STD-151			X										
MIL-STD-1312					X		X	X			X		
MIL-B-857		X											
MIL-B-7838					X	X						X	
MIL-B-7874						X							
MIL-B-8831					X	X							
MIL-B-8906						X						X	
MIL-B-8907		X				X						X	
MIL-F-8961													X
MIL-F-18240													X
MIL-S-7742										X			
MIL-S-45909									X				
MIL-S-45915									X				
MIL-S-45933									X				
ASTMA370				X							X		
ASTME8											X		
ASTME10							X						
ASTME18							X						
ASTME92							X						
ASTME112						X							
ASTME151					X								
NAS621										X		X	
NAS4002						X							
NAS4003						X					X	X	X
NAS4004						X					X	X	X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

5.5 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table III provides codes for column headings which may be used for bolts and studs characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

TABLE III. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1771	THD DES	1773	THD DES END 1	1775	THD DES END 2
1777	INTL THD DES	2795	ULT TNSL STR KSI	2797	ULT TNSL STR MPA
2799	TNSL YIELD STR KSI	2801	TNSL YIELD STR MPA	7044	WT PER 100 KILOGRAMS
2805	PROOF STR POUNDS	2807	PROOF STR NEWTONS	7042	WT PER 100 POUNDS
7041	WT PER 100 OUNCES	7021	WT MAX EA GRAMS	7022	WT MAX EA OUNCES
7023	WT MAX EA POUNDS	6996	WT NOM EA OUNCES	6997	WT NOM EA POUNDS
6998	WT NOM EA GRAMS	6999	WT NOM EA KILOGRAMS	1778	SIZE DES
1769	THREAD DOC DES				

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

5.6 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.6.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.6.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.6.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT	0700
ONE SECTION DOCUMENT	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6874	THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).
0107	
0108	0108. SCOPE.
	SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.
	PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.
	PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.
6941	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.
6942	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION	
IN ACCORDANCE WITH BASE DOCUMENT	
TYPE (DESIGNATION)	1751
GRADE (DESIGNATION)	1753
CLASS (DESIGNATION)	1755
STYLE (DESIGNATION)	1757
COMPOSITION (DESIGNATION)	1759
TEMPERATURE RATING	
MAXIMUM SERVICE (DEGREES CELSIUS)	4905
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
*UNITS (SELECT ONE)	
U.S.	
INCHES.	7572
SI	
MILLIMETERS.	7577

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CLASSIFICATION.
1751	TYPE. TYPE 1751 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1753	GRADE. GRADE 1753 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1755	CLASS. CLASS 1755 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1757	STYLE. STYLE 1757 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1759	COMPOSITION. COMPOSITION 1759 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
	TEMPERATURE RATING.
4905	THE MAXIMUM SERVICE TEMPERATURE RATING SHALL BE 4905 DEGREES CELSIUS.
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950
NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.	
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	
MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE IX IS USED.	
METALS	
DISSIMILAR METALS.	7580

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.
	MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
	FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
7580	METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION	
BEARING SURFACE	
MAXIMUM DEVIATION FROM 90 DEGREE AXIS (DEGREES)	1901
COLOR	
COLOR (NAME)	1761
(DESIGNATION)	1763
*PER DOCUMENT (DESIGNATION)	1765
CLASS (NUMBER)	1767
THREADS, (SELECT AS REQUIRED)	
PER DOCUMENT (DOC DES)	1769
ITEMS THREAD (DESIGNATION)	1771
END 1 THREAD (DESIGNATION)	1773
END 2 THREAD (DESIGNATION)	1775
INTERNAL THREAD (DESIGNATION)	1777
SIZE	
(DESIGNATION)	1778

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	DESIGN AND CONSTRUCTION
1901	BEARING SURFACE. THE DEVIATION OF THE HEAD OR SHOULDER BEARING SURFACE FROM THE 90 DEGREE CENTRAL AXIS OF THE ITEM SHALL BE NOT GREATER THAN 1901 DEGREES.
	COLOR.
1761	THE COLOR SHALL BE 1761.
1763	COLOR DESIGNATION 1763 SHALL APPLY.
1765	THE COLOR SHALL BE IN ACCORDANCE WITH 1765.
1767	COLOR CLASS NUMBER 1767 SHALL APPLY.
1769	THREADS. THREADS SHALL BE IN ACCORDANCE WITH 1769.
1771	THE THREAD OF THE ITEM(S) SHALL BE 1771.
1773	THE EXTERNAL THREAD OF END 1 SHALL BE 1773.
1775	THE EXTERNAL THREAD OF END 2 SHALL BE 1775.
1777	THE INTERNAL THREAD OF THE ITEM SHALL BE 1777.
	SIZE.
1778	THE ITEM SIZE SHALL BE 1778.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR. CODE
DESIGN AND CONSTRUCTION (CONT)	
WEIGHT/MASS	
MAXIMUM WEIGHT/MASS PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024
MAXIMUM WEIGHT/MASS PER 100 (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7041
(POUNDS)	7042
SI (SELECT ONE)	
(GRAMS)	7043
(KILOGRAMS)	7044

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7023	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).
7021	MAXIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	MAXIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).
7041	MAXIMUM WEIGHT PER 100. THE WEIGHT PER 100 UNITS SHALL BE NOT GREATER THAN 7041 OUNCE(S).
7042	MAXIMUM WEIGHT PER 100. THE WEIGHT PER 100 UNITS SHALL BE NOT GREATER THAN 7042 POUND(S).
7043	MAXIMUM MASS PER 100. THE MASS PER 100 UNITS SHALL BE NOT GREATER THAN 7043 GRAM(S).
7044	MAXIMUM MASS PER 100. THE MASS PER 100 UNITS SHALL BE NOT GREATER THAN 7044 LOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
WEIGHT/MASS (CONT)	
NOMINAL WEIGHT/MASS PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	6996
(POUNDS)	6997
SI (SELECT ONE)	
(GRAMS)	6998
(KILOGRAMS)	6999
BENDING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2297
UNTHREADED SHANK, NO CRACK OR FRACTURE.	2299
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2281
PER MIL-B-857.	2283

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6996	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6996 OUNCE(S).
6997	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6997 POUND(S).
6998	NOMINAL MASS PER UNIT. THE MASS PER UNIT SHALL BE 6998 GRAM(S).
6999	NOMINAL MASS PER UNIT. THE MASS PER UNIT SHALL BE 6999 KILOGRAM(S).
2297	BENDING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2297.
2299	BENDING. THE UNTHREADED SHANK SHALL NOT CRACK OR FRACTURE.
2281	BENDING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2281.
2283	BENDING. TESTING SHALL BE PERFORMED IN ACCORDACNE WITH MIL-B-857.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CARBURIZATION AND DECARBURIZATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2645
AS FOLLOWS:	2633
MAXIMUM DEPTH (SELECT ONE)	
(INCHES)	2651
(MILLIMETERS)	2653
MAXIMUM PERCENT OF SECTIONAL THICKNESS	
(PERCENT)	2655
MAXIMUM LIMITS, PER MIL-B-8907.	2657
MAXIMUM LIMITS, PER MIL-B-857.	2658
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2662
PER DOCUMENT (DOC DES)	2664

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2645	CARBURIZATION AND DECARBURIZATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2645.
2633	CARBURIZATION AND DECARBURIZATION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2651	THE DECARBURIZED DEPTH SHALL BE NOT GREATER THAN 2651 INCH(S).
2653	THE DECARBURIZED DEPTH SHALL BE NOT GREATER THAN 2653 MILLIMETER(S).
2655	THE PERCENT OF THE SECTIONAL THICKNESS SHALL BE NOT GREATER THAN 2655 PERCENT.
2657	THE DECARBURIZATION OF THE THREAD AREA SHALL BE NOT GREATER THAN THE LIMITS SHOWN IN MIL-B-8907.
2658	THE DECARBURIZATION OF THE THREAD AREA SHALL BE NOT GREATER THAN THE LIMITS SHOWN IN MIL-B-857.
2662	CARBURIZATION AND DECARBURIZATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2662.
2664	CARBURIZATION AND DECARBURIZATION. TESTING SHALL BE IN ACCORDANCE WITH 2664.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CHEMICAL ANALYSIS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2666
AS FOLLOWS:	2668
SUPPLIER CERTIFICATION.	2672
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2674
PER DOCUMENT (DOC DES)	2676
METHOD (NUMBER)	2678
DUCTILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1939
MINIMUM ELONGATION (PERCENT)	1941
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1921

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2666	CHEMICAL ANALYSIS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2666.
2668	CHEMICAL ANALYSIS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2672	SUPPLIER CERTIFICATION MAY BE ACCEPTED IN LIEU OF A SPECIFIC CHEMICAL ANALYSIS.
2674	CHEMICAL ANALYSIS. TESTING SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2674.
2676	CHEMICAL ANALYSIS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2676.
2678	TEST METHOD 2678 SHALL APPLY.
1939	DUCTILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1939.
1941	DUCTILITY. THE MINIMUM ELONGATION IN A FOUR DIAMETER LENGTH SHALL BE 1941 PERCENT.
1921	DUCTILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1921.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DUCTILITY (CONT)	
TEST METHODS (CONT)	
PER DOCUMENT (DOC DES)	1931
FATIGUE STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2411
MINIMUM TEST (CYCLES)	2413
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2415
PER DOCUMENT (DOC DES)	2423
MINIMUM HIGH TENSION LOAD (SELECT ONE)	
(POUNDS)	2425
(NEWTONS)	2427
LOW TENSION LOAD (SELECT ONE)	
(POUNDS)	2441
(NEWTONS)	2443

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1931	DUCTILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1931.
2411	FATIGUE STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2411.
2413	FATIGUE STRENGTH. THE TEST SPECIMEN SHALL WITHSTAND NOT LESS THAN 2413 CYCLES.
2415	FATIGUE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2415.
2423	FATIGUE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2423.
2425	THE HIGH TENSION LOAD SHALL BE NOT LESS THAN 2425 POUNDS.
2427	THE HIGH TENSION LOAD SHALL BE NOT LESS THAN 2427 NEWTONS.
2441	THE LOW TENSION LOAD SHALL BE 2441 POUNDS.
2443	THE LOW TENSION LOAD SHALL BE 2443 NEWTONS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
GRAIN FLOW	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2493
FOLLOW THREAD CONTOUR.	2495
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2497
PER DOCUMENT (DOC DES)	2499
TEST METHOD ____	2541
HARDNESS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2133
AS FOLLOWS:	2139
HARDNESS TESTER (NAME)	2141
HARDNESS SCALE (DESIGNATION)	2143
HARDNESS VALUE	
MINIMUM (NUMBER)	2150
MAXIMUM (NUMBER)	2153

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
2493	GRAIN FLOW. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2493.
2495	GRAIN FLOW. THE GRAIN FLOW IN ROLLED THREADS SHALL FOLLOW THREAD CONTOUR WITH MAXIMUM DENSITY AT ROOT RADIUS.
2497	GRAIN FLOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2497.
2499	GRAIN FLOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2499.
2541	TEST METHOD 2541 SHALL APPLY.
2133	HARDNESS. THE HARDNESS SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2133.
2139	HARDNESS. THE HARDNESS SHALL BE AS FOLLOWS:
2141	THE 2141 TESTER SHALL BE USED.
2143	THE 2143 SCALE SHALL APPLY.
2150	THE HARDNESS VALUE SHALL BE NOT LESS THAN 2150.
2153	THE HARDNESS VALUE SHALL BE NOT GREATER THAN 2153.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HARDNESS (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2155
PER DOCUMENT (DOC DES)	2157
TEST METHOD (NUMBER)	2159
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4798
NO CORROSION OR DAMAGE.	4799
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4788
PER MIL-STD-1312, TEST 3.	4881
TEST DURATION (HOURS)	4816
HYDROGEN EMBRITTLEMENT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2353

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2155	HARDNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2155.
2157	HARDNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2157.
2159	TEST METHOD 2159 SHALL APPLY.
4798	HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.
4799	HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
4788	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.
4881	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH TEST 3 OF MIL-STD-1312.
4816	DURATION OF THE TEST SHALL BE 4816 HOUR(S).
2353	HYDROGEN EMBRITTLEMENT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2353.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HYDROGEN EMBRITTLEMENT (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	2361
NO EMBRITTLEMENT FROM PLATING PROCESS.	2363
EMBRITTLEMENT RELIEF PER PLATING DOCUMENT.	2365
SUPPLIER CERTIFICATION.	2367
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2369
PER DOCUMENT (DOC DES)	2371
BAKING TEMPERATURE (DEGREES CELSIUS)	2373
TEMPERATURE TOLERANCE PLUS OR MINUS (DEGREES CELSIUS)	2375
BAKING PERIOD (HOURS)	2377
MAGNETIC PERMEABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1711
MAXIMUM PERMEABILITY (MU)	1713

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2361	HYDROGEN EMBRITTLEMENT. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2363	THERE SHALL BE NO EMBRITTLEMENT FROM THE PLATING PROCESS.
2365	EMBRITTLEMENT RELIEF SHALL BE IN ACCORDANCE WITH THE PLATING DOCUMENT.
2367	SUPPLIER CERTIFICATION MAY BE ACCEPTED IN LIEU OF TESTING.
2369	HYDROGEN EMBRITTLEMENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2369.
2371	HYDROGEN EMBRITTLEMENT. TESTING SHALL BE IN ACCORDANCE WITH 2371.
2373	THE BAKING TEMPERATURE SHALL BE 2373 DEGREES CELSIUS.
2375	THE BAKING TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2375 DEGREES CELSIUS.
2377	THE BAKING PERIOD SHALL BE 2377 HOUR(S).
1711	MAGNETIC PERMEABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1711.
1713	MAGNETIC PERMEABILITY. MAGNETIC PERMEABILITY SHALL BE NOT GREATER THAN 1713 MU.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAGNETIC PERMEABILITY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1715
INDICATOR PER MIL-I-17214.	1717
RESISTANCE TO PULLOUT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2481
MINIMUM AXIAL LOAD (SELECT ONE)	
(POUNDS)	2483
(NEWTONS)	2485
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2489
PER DOCUMENT (DOC DES)	2491
SALT SPRAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4878

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1715	MAGNETIC PERMEABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1715.
1717	MAGNETIC PERMEABILITY. TESTING SHALL BE PERFORMED WITH MIL-I-17214 INDICATOR.
2481	RESISTANCE TO PULLOUT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2481.
2483	RESISTANCE TO PULLOUT. THE AXIAL LOAD SHALL BE NOT LESS THAN 2483 POUND(S).
2485	RESISTANCE TO PULLOUT. THE AXIAL LOAD SHALL BE NOT LESS THAN 2485 NEWTON(S).
2489	RESISTANCE TO PULLOUT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2489.
2491	RESISTANCE TO PULLOUT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2491.
4878	SALT SPRAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4878.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT SPRAY (CONT)	
REQUIREMENTS (CONT)	
NO CORROSION, DAMAGE OR DEGRADATION.	4782
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4770
PER MIL-STD-1312, TEST 1.	4768
SHEAR, STRENGTH (DOUBLE)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1781
AS FOLLOWS:	1783
MINIMUM ULTIMATE STRENGTH (SELECT ONE)	
(THOUSAND POUNDS PER SQUARE INCH)	1785
(MEGAPASCALS)	1787

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4782	SALT SPRAY. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
4770	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4770.
4768	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH TEST 1 OF MIL-STD-1312.
1781	SHEAR STRENGTH (DOUBLE). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1781.
1783	SHEAR STRENGTH (DOUBLE). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1785	THE ULTIMATE STRENGTH SHALL BE NOT LESS THAN 1785 THOUSAND POUNDS PER SQUARE INCH.
1787	THE ULTIMATE STRENGTH SHALL BE NOT LESS THAN 1787 MEGAPASCAL(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHEAR STRENGTH (DOUBLE) (CONT)	
AS FOLLOWS: (CONT)	
MINIMUM YIELD STRENGTH (SELECT ONE)	
(THOUSAND POUNDS PER SQUARE INCH)	1789
(MEGAPASCALS)	1791
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1793
PER MIL-STD-1312, TEST 13.	1795
SHEAR STRENGTH (SINGLE)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1797
AS FOLLOWS:	1799
MINIMUM ULTIMATE STRENGTH (SELECT ONE)	
(THOUSAND POUNDS PER SQUARE INCH)	1871
(MEGAPASCALS)	1873

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1789	THE YIELD STRENGTH SHALL BE NOT LESS THAN 1789 THOUSAND POUNDS PER SQUARE INCH.
1791	THE YIELD STRENGTH SHALL BE NOT LESS THAN 1791 MEGAPASCAL(S).
1793	SHEAR STRENGTH (DOUBLE). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1793.
1795	SHEAR STRENGTH (DOUBLE). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH TEST 13 OF MIL-STD-1312.
1797	SHEAR STRENGTH (SINGLE). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1797.
1799	SHEAR STRENGTH (SINGLE). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1871	THE ULTIMATE STRENGTH SHALL BE NOT LESS THAN 1871 THOUSAND POUNDS PER SQUARE INCH.
1873	THE ULTIMATE STRENGTH SHALL BE NOT LESS THAN 1873 MEGAPASCAL(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHEAR STRENGTH (SINGLE) (CONT)	
AS FOLLOWS: (CONT)	
MINIMUM YIELD STRENGTH (SELECT ONE)	
(THOUSAND POUNDS PER SQUARE INCH)	1865
(MEGAPASCALS)	1867
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1831
PER MIL-STD-1312, TEST 20.	1833
STRESS CORROSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2701
NO CRACKS, PHYSICAL DAMAGE OR CORROSION.	2703
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2705
PER MIL-STD-1312, TEST 9.	2707

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1865	THE YIELD STRENGTH SHALL BE NOT LESS THAN 1865 THOUSAND POUNDS PER SQUARE INCH.
1867	THE YIELD STRENGTH SHALL BE NOT LESS THAN 1867 MEGAPASCAL(S).
1831	SHEAR STRENGTH (SINGLE). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1831.
1833	SHEAR STRENGTH (SINGLE). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH TEST 20 OF MIL-STD-1312.
2701	STRESS CORROSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2701.
2703	STRESS CORROSION. THE TEST SPECIMEN SHALL SHOW NO EVIDENCE OF CRACKS, PHYSICAL DAMAGE OR CORROSION.
2705	STRESS CORROSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2705.
2707	STRESS CORROSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH TEST 9 OF MIL-STD-1312.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STRESS CORROSION (CONT)	
PER MIL-STD-1312, TEST 9. (CONT)	
TEST LOAD (SELECT ONE)	
(POUNDS)	2709
(NEWTONS)	2711
INDUCED LOAD PERCENT OF MINIMUM ULTIMATE TENSILE STRENGTH (PERCENT)	2713
TEST DURATION (HOURS)	2715
DURATION TOLERANCE PLUS OR MINUS (MINUTES)	2717
STRESS RELAXATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2719
MAXIMUM ELONGATION (SELECT ONE)	
(INCHES)	2721
(MILLIMETERS)	2723
PERCENT INCREASE FROM INITIAL (PERCENT)	2725

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2709	THE TEST LOAD SHALL BE 2709 POUND(S).
2711	THE TEST LOAD SHALL BE 2711 NEWTON(S).
2713	THE INDUCED TEST LOAD SHALL BE THE EQUIVALENT OF 2713 PERCENT OF THE MINIMUM ULTIMATE TENSILE STRENGTH.
2715	THE TEST DURATION SHALL BE 2715 HOUR(S).
2717	THE TEST DURATION TOLERANCE SHALL BE PLUS OR MINUS 2717 MINUTE(S).
2719	STRESS RELAXATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2719.
2721	STRESS RELAXATION. THE ELONGATION SHALL BE NOT GREATER THAN 2721 INCH(S).
2723	STRESS RELAXATION. THE ELONGATION SHALL BE NOT GREATER THAN 2723 MILLIMETER(S).
2725	STRESS RELAXATION. THE PERCENT OF ELONGATION SHALL BE NOT GREATER THAN 2725 PERCENT OF THE INITIAL MEASUREMENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STRESS RELAXATION (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2727
PER MIL-STD-1312, TEST 17.	2729
TEST LOAD (SELECT ONE)	
(THOUSAND POUNDS PER SQUARE INCH)	2731
(MEGAPASCALS)	2733
DURATION (HOURS)	2735
TEMPERATURE (DEGREES CELSIUS)	2737
TOLERANCE PLUS OR MINUS (DEGREES CELSIUS)	2739
STRESS RUPTURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2741
AS FOLLOWS: (SELECT ONE)	2743
TEST SPECIMEN TO FAILURE (MINIMUM FRACTURE POINT)	2745
NO FRACTURE AT ELAPSED TIME LIMIT.	2747

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2727	STRESS RELAXATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2727.
2729	STRESS RELAXATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH TEST 17 OF MIL-STD-1312.
2731	THE TEST LOAD SHALL BE 2731 THOUSAND POUNDS PER SQUARE INCH.
2733	THE TEST LOAD SHALL BE 2733 MEGAPASCAL(S).
2735	THE TEST DURATION SHALL BE 2735 HOUR(S).
2737	THE TEST TEMPERATURE SHALL BE 2737 DEGREES CELSIUS.
2739	THE TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2739 DEGREES CELSIUS.
2741	STRESS RUPTURE. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2741.
2743	STRESS RUPTURE. REQUIREMENT(S) SHALL BE AS FOLLOWS:
2745	THE FAILURE POINT OF THE ITEM SHALL BE NOT LESS THAN 2745.
2747	THERE SHALL BE NO FRACTURE AT THE END OF THE TEST TIME.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STRESS RUPTURE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2749
PER MIL-STD-1312, TEST 10.	2751
TEST LOAD	
(THOUSAND POUNDS PER SQUARE INCH)	2753
(MEGAPASCALS)	2755
TEST TEMPERATURE (DEGREES CELSIUS)	2757
TOLERANCE PLUS OR MINUS (DEGREES CELSIUS)	2759
TEST DURATION (HOURS)	2761
SURFACE DEFECTS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2763
PER FF-S-85 LIMITATIONS.	2765
PER MIL-S-45909 LIMITATIONS.	2767
PER NAS621 LIMITATIONS.	2769

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2749	STRESS RUPTURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2749.
2751	STRESS RUPTURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH TEST 10 OF MIL-STD-1312.
2753	THE TEST LOAD SHALL BE 2753 THOUSAND POUNDS PER SQUARE INCH.
2755	THE TEST LOAD SHALL BE 2755 MEGAPASCAL(S).
2757	THE TEST TEMPERATURE SHALL BE 2757 DEGREES CELSIUS.
2759	THE TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2759 DEGREES CELSIUS.
2761	THE TEST DURATION SHALL BE 2761 HOUR(S).
2763	SURFACE DEFECTS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2763.
2765	SURFACE DEFECTS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE LIMITATIONS OF FF-S-85.
2767	SURFACE DEFECTS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE LIMITATIONS OF MIL-S-45909.
2769	SURFACE DEFECTS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE LIMITATIONS OF NAS621.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SURFACE DEFECTS (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2771
PER DOCUMENT (DOC DES)	2773
SURFACE ROUGHNESS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2775
AS FOLLOWS:	2777
MAXIMUM ROUGHNESS HEIGHT, ARITHMETICAL AVERAGE	
HEAD AND/OR SHANK (SELECT ONE)	
(MICROINCHES)	2779
(MICROMETERS)	2781
THREAD (SELECT ONE)	
(MICROINCHES)	2783
(MICROMETERS)	2785

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2771	SURFACE DEFECTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2771.
2773	SURFACE DEFECTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2773.
2775	SURFACE ROUGHNESS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2775.
2777	SURFACE ROUGHNESS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2779	THE ARITHMETICAL AVERAGE ROUGHNESS HEIGHT OF THE HEAD AND/OR SHANK SHALL BE NOT GREATER THAN 2779 MICROINCH(S).
2781	THE ARITHMETICAL AVERAGE ROUGHNESS HEIGHT OF THE HEAD AND/OR SHANK SHALL BE NOT GREATER THAN 2781 MICROMETER(S).
2783	THE ARITHMETICAL AVERAGE ROUGHNESS HEIGHT OF THE THREAD SHALL BE NOT GREATER THAN 2783 MICROINCH(S).
2785	THE ARITHMETICAL AVERAGE ROUGHNESS HEIGHT OF THE THREAD SHALL BE NOT GREATER THAN 2785 MICROMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SURFACE ROUGHNESS (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2787
PER ANSIB46.1.	2789
TENSILE STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2791
AS FOLLOWS:	2793
MINIMUM ULTIMATE TENSILE STRENGTH (SELECT ONE)	
(THOUSAND POUNDS PER SQUARE INCH)	2795
(MEGAPASCALS)	2797
MINIMUM TENSILE YIELD STRENGTH (SELECT ONE)	
(THOUSAND POUNDS PER SQUARE INCH)	2799
(MEGAPASCALS)	2801

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2787	SURFACE ROUGHNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2787.
2789	SURFACE ROUGHNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ANSIB46.1.
2791	TENSILE STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2791.
2793	TENSILE STRENGTH. THE TENSILE STRENGTH SHALL BE AS FOLLOWS:
2795	THE ULTIMATE TENSILE STRENGTH SHALL BE NOT LESS THAN 2795 THOUSAND POUNDS PER SQUARE INCH.
2797	THE ULTIMATE TENSILE STRENGTH SHALL BE NOT LESS THAN 2797 MEGAPASCAL(S).
2799	THE TENSILE YIELD STRENGTH SHALL BE NOT LESS THAN 2799 THOUSAND POUNDS PER SQUARE INCH.
2801	THE TENSILE YIELD STRENGTH SHALL BE NOT LESS THAN 2801 MEGAPASCAL(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TENSILE STRENGTH (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM REDUCTION IN AREA (PERCENT)	2803
MINIMUM PROOF STRENGTH (SELECT ONE)	
(POUNDS)	2805
(NEWTONS)	2807
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2809
PER DOCUMENT (DOC DES)	2811
TENSION LOAD RATE (SELECT ONE)	
(POUNDS PER SQUARE INCH PER MINUTE)	2813
(MEGAPASCALS PER MINUTE)	2815
SPECIMEN REDUCED SHANK DIAMETER (SELECT ONE)	
(INCHES)	2817
(MILLIMETERS)	2819

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2803	THE REDUCTION IN AREA SHALL BE NOT GREATER THAN 2803 PERCENT OF THE ORIGINAL CROSS SECTIONAL AREA OF THE SPECIMEN.
2805	THE PROOF STRENGTH SHALL BE NOT LESS THAN 2805 POUND(S).
2807	THE PROOF STRENGTH SHALL BE NOT LESS THAN 2807 NEWTON(S).
2809	TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2809.
2811	TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2811.
2813	THE TENSION LOAD RATE SHALL BE 2813 POUNDS PER SQUARE INCH PER MINUTE.
2815	THE TENSION LOAD RATE SHALL BE 2815 MEGAPASCALS PER MINUTE.
2817	THE REDUCED SHANK DIAMETER OF THE SPECIMEN SHALL BE 2817 INCH(S).
2819	THE REDUCED SHANK DIAMETER OF THE SPECIMEN SHALL BE 2819 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TENSILE STRENGTH (CONT)	
PER DOCUMENT (CONT)	
TEST TEMPERATURE (DEGREES CELSIUS)	2821
TOLERANCE PLUS OR MINUS (DEGREES CELSIUS)	2823
TEMPERATURE DURATION (MINUTES)	2825
TEST FIXTURE TYPE (DESIGNATION)	2827
TENSION FATIGUE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2829
MINIMUM (CYCLES)	2831
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2833
PER MIL-STD-1312, TEST 11.	2835
MINIMUM HIGH TENSION LOAD (SELECT ONE)	
(POUNDS)	2837
(NEWTONS)	2839

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2821	THE TEST TEMPERATURE SHALL BE 2821 DEGREES CELSIUS.
2823	THE TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2823 DEGREES CELSIUS.
2825	THE TEMPERATURE DURATION SHALL BE 2825 MINUTE(S).
2827	TEST FIXTURE TYPE 2827 SHALL BE USED.
2829	TENSION FATIGUE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2829.
2831	TENSION FATIGUE. THE TEST SPECIMEN SHALL WITHSTAND NOT LESS THAN 2831 CYCLES.
2833	TENSION FATIGUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2833.
2835	TENSION FATIGUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH TEST 11 OF MIL-STD-1312.
2837	THE HIGH TENSION LOAD SHALL BE NOT LESS THAN 2837 POUND(S).
2839	THE HIGH TENSION LOAD SHALL BE NOT LESS THAN 2839 NEWTON(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TENSION FATIGUE (CONT)	
PER MIL-STD-1312, TEST 11. (CONT)	
LOW TENSION LOAD (SELECT ONE)	
(POUNDS)	2841
(NEWTONS)	2843
LOW LOAD PERCENT OF HIGH LOAD (PERCENT)	2845
MAXIMUM TEST SPEED (CYCLES PER MINUTE)	2847
THICKNESS OF METALLIC COATING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1721
REQUIREMENTS FOR PLATING THICKNESS AND OTHER PARAMETERS.	
NOTE: SEE FINISH TABLE, TABLE IX, OF DOD-STD-35.	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2849
PER PLATING DOCUMENT.	2851

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2841	THE LOW TENSION LOAD SHALL BE 2841 POUND(S).
2843	THE LOW TENSION LOAD SHALL BE 2843 NEWTON(S).
2845	THE LOW TENSION LOAD SHALL BE 2845 PERCENT OF THE HIGH TENSION LOAD.
2847	THE TEST SPEED SHALL BE NOT GREATER THAN 2847 CYCLES PER MINUTE.
1721	THICKNESS OF METALLIC COATING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1721.
2849	THICKNESS OF METALLIC COATING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2849.
2851	THICKNESS OF METALLIC COATING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE PLATING SPECIFICATION.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THICKNESS OF METALLIC COATING (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-1312, TEST 12.	2853
TEST METHOD (NUMBER)	2856
THREAD FORMING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1723
THREAD FORMED BY (SELECT ONE)	
ROLLING.	1729
CUTTING.	1727
FORGING.	1731
OTHER (SPECIFY)	1725
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2857
PER DOCUMENT (DOC DES)	2859

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2853	THICKNESS OF METALLIC COATING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH TEST 12 OF MIL-STD-1312.
2856	THE TEST METHOD USED SHALL BE 2856.
1723	THREAD FORMING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1723.
1729	THREAD FORMING. THE THREADS SHALL BE FORMED BY ROLLING.
1727	THREAD FORMING. THE THREADS SHALL BE FORMED BY CUTTING.
1731	THREAD FORMING. THE THREADS SHALL BE FORMED BY FORGING.
1725	THREAD FORMING. THE THREADS SHALL BE FORMED BY 1725.
2857	THREAD FORMING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2857.
2859	THREAD FORMING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2859.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TORQUE, LOCKING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2561
AS FOLLOWS:	2563
MAXIMUM INSERTION AND REMOVAL TORQUE (SELECT ONE)	
(POUND-INCHES)	2565
(NEWTON METERS)	2567
MINIMUM BREAKAWAY TORQUE (SELECT ONE)	
(POUND-INCHES)	2872
(NEWTON METERS)	2631
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2641
PER DOCUMENT (DOC DES)	2639

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2561	TORQUE, LOCKING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2561.
2563	TORQUE, LOCKING. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2565	THE INSERTION AND REMOVAL TORQUE SHALL BE NOT GREATER THAN 2565 POUND-INCHES.
2567	THE INSERTION AND REMOVAL TORQUE SHALL BE NOT GREATER THAN 2567 NEWTON METERS.
2872	THE BREAKAWAY TORQUE SHALL BE NOT LESS THAN 2872 POUND-INCHES.
2631	THE BREAKAWAY TORQUE SHALL BE NOT LESS THAN 2631 NEWTON METERS.
2641	TORQUE, LOCKING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2641.
2639	TORQUE, LOCKING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2639.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TORSIONAL STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1733
AS FOLLOWS:	1735
MINIMUM TORSIONAL STRENGTH (SELECT ONE)	
(POUND-INCHES)	1737
(NEWTON METERS)	1739
NO CRACKING OR FRACTURES.	1741
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2381
PER ANSIB18.6.4.	2383
SHANK DIAMETER (SELECT ONE)	
(INCHES)	2385
(MILLIMETERS)	2387
LOADING METHOD (SELECT ONE)	
HAND TORQUE.	2389
MACHINE TORQUE.	2391

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1733	TORSIONAL STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1733.
1735	TORSIONAL STRENGTH. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1737	TORSIONAL STRENGTH SHALL BE NOT LESS THAN 1737 POUND-INCH(S).
1739	TORSIONAL STRENGTH SHALL BE NOT LESS THAN 1739 NEWTON METER(S).
1741	THERE SHALL BE NO CRACKING OR FRACTURES.
2381	TORSIONAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2381.
2383	TORSIONAL STRENGTH. TESTING SHALL BE IN ACCORDANCE WITH ANSIB18.6.4.
2385	SHANK DIAMETER SHALL BE 2385 INCH(S).
2387	SHANK DIAMETER SHALL BE 2387 MILLIMETER(S).
2389	LOADING SHALL BE DONE BY HAND TORQUE.
2391	LOADING SHALL BE DONE BY MACHINE TORQUE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TORSIONAL STRENGTH (CONT)	
PER ANSIB18.6.4. (CONT)	
MINIMUM LOAD (SELECT ONE)	
(POUNDS)	2571
(NEWTONS)	2573
VIBRATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4681
AS FOLLOWS:	1743
MAXIMUM ROTATION (DEGREES)	1745
NO FRACTURES OR CRACKS.	1747
NO LOCKING ELEMENT FAILURE.	1749
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1505
PER MIL-STD-1312, TEST 7.	2875
TEST LOAD (SELECT ONE)	
(POUNDS)	2877
(NEWTONS)	2879

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2571	THE LOAD SHALL BE NOT LESS THAN 2571 POUND(S).
2573	THE LOAD SHALL BE NOT LESS THAN 2573 NEWTON(S).
4681	VIBRATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4681.
1743	VIBRATION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1745	THE ROTATION OF THE ITEM SHALL BE NOT GREATER THAN 1745 DEGREES DURING THE VIBRATION TEST.
1747	THERE SHALL BE NO FRACTURES OR CRACKS.
1749	THERE SHALL BE NO LOCKING ELEMENT FAILURE.
1505	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1505.
2875	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH TEST 7 OF MIL-STD-1312.
2877	THE TEST LOAD SHALL BE 2877 POUNDS.
2879	THE TEST LOAD SHALL BE 2879 NEWTON(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION (CONT)	
PER MIL-STD-1312, TEST 7. (CONT)	
BAKE TEMPERATURE (DEGREES CELSIUS)	2881
TEST DURATION (HOURS)	2883
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-130.	7629

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2881	THE BAKE TEMPERATURE SHALL BE 2881 DEGREES CELSIUS.
2883	THE TEST DURATION SHALL BE 2883 HOUR(S).
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI


(Project EDS-A292)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.


APPENDIX A

ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

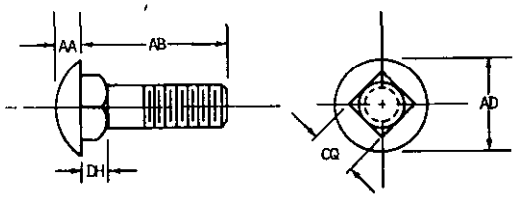


152-01-1

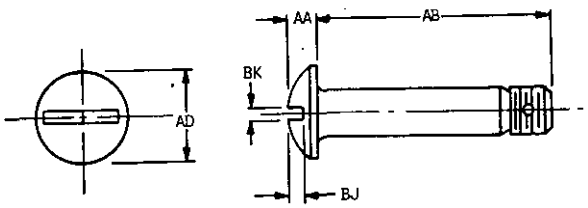


152-01-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

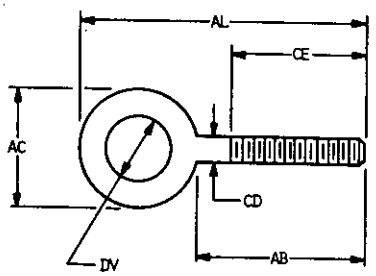


152-01-4

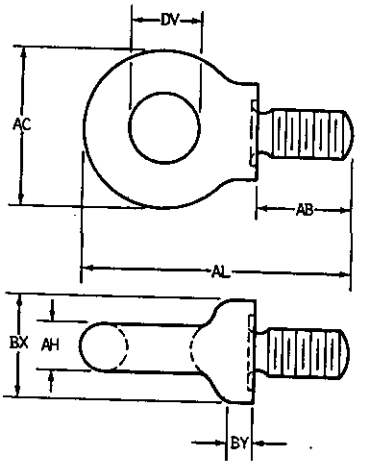


152-01-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

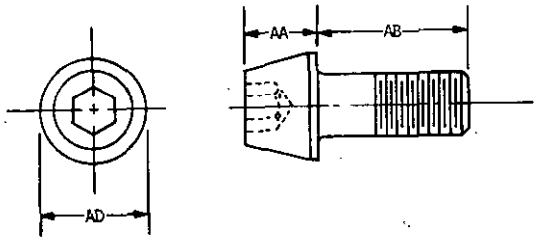


152-01-5

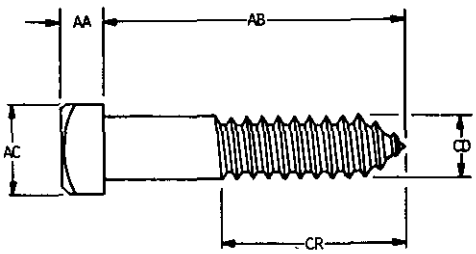


152-01-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

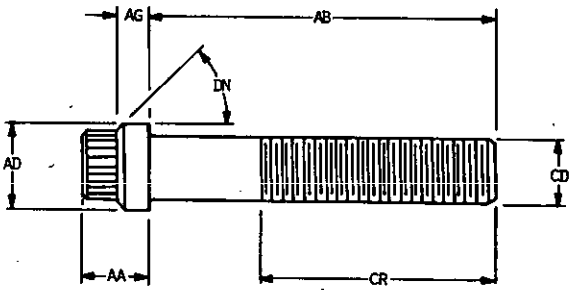


152-01-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

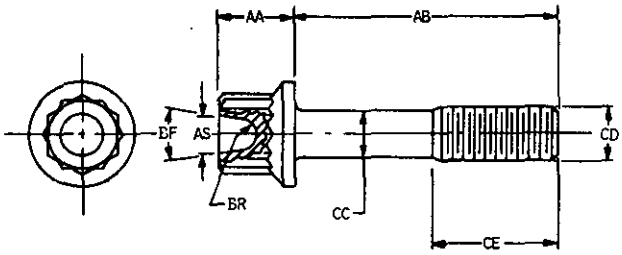


152-01-8

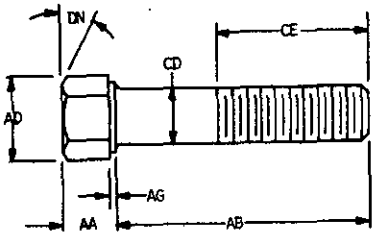


152-01-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

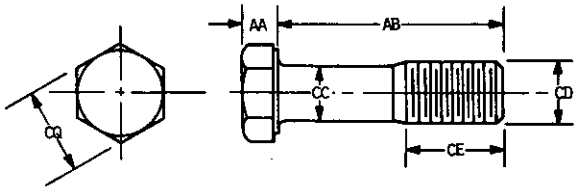


152-01-10

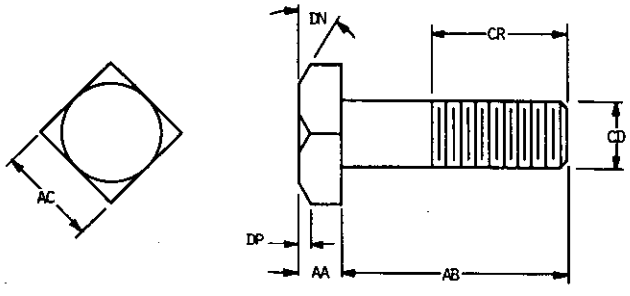


152-01-11

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

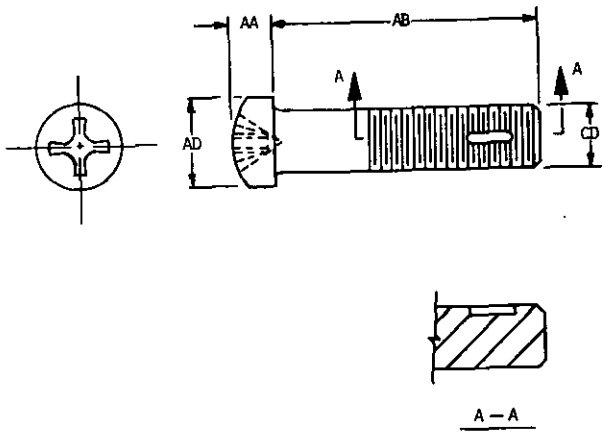


152-01-12

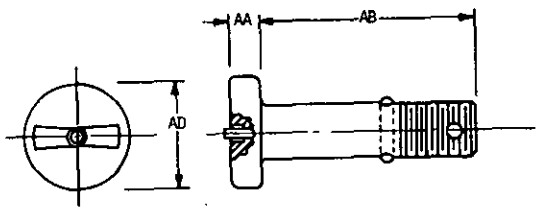


(MIL-B-23964)

152-01-13

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

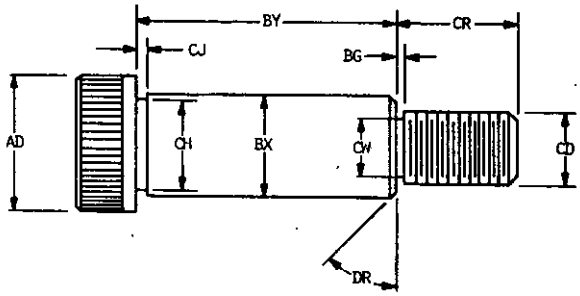


152-01-14

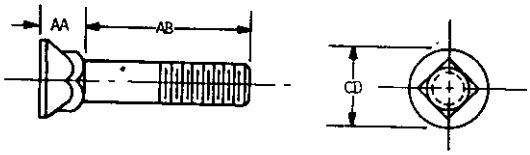



152-01-15

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

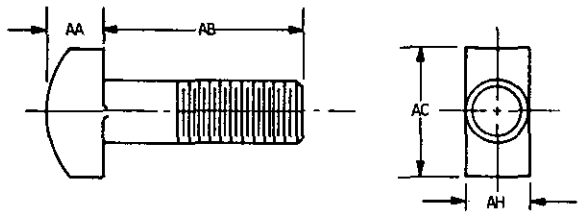


152-01-16






A-A

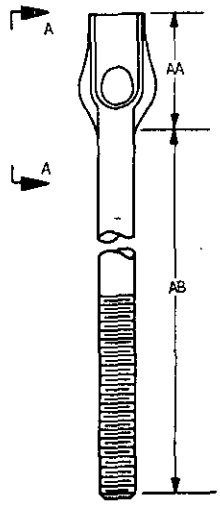


(MS35796)

152-01-17

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

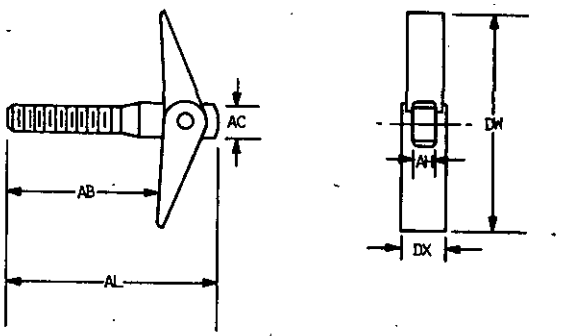


152-01-18

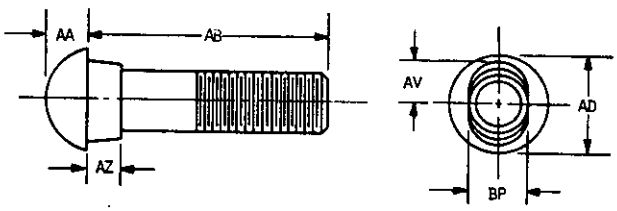


152-01-19

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

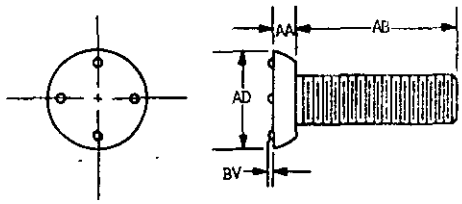


152-01-20

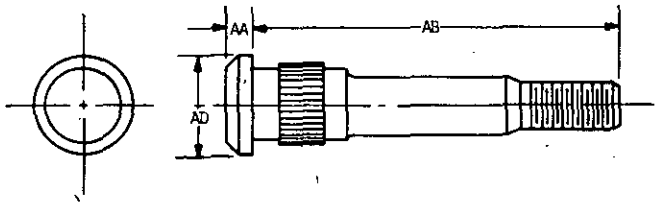


152-01-21

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

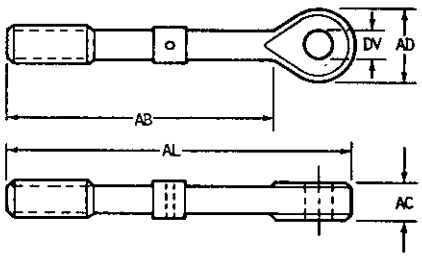


152-01-22

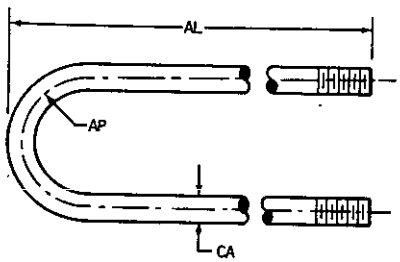


152-01-23

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

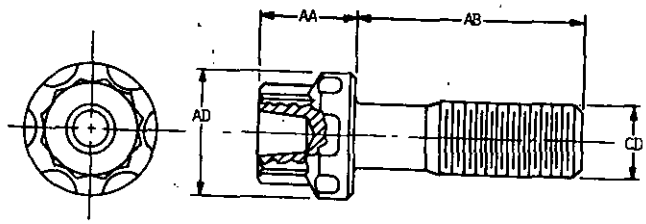


152-01-24

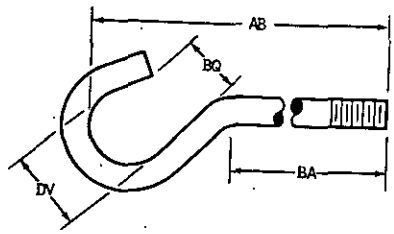

152-01-25


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

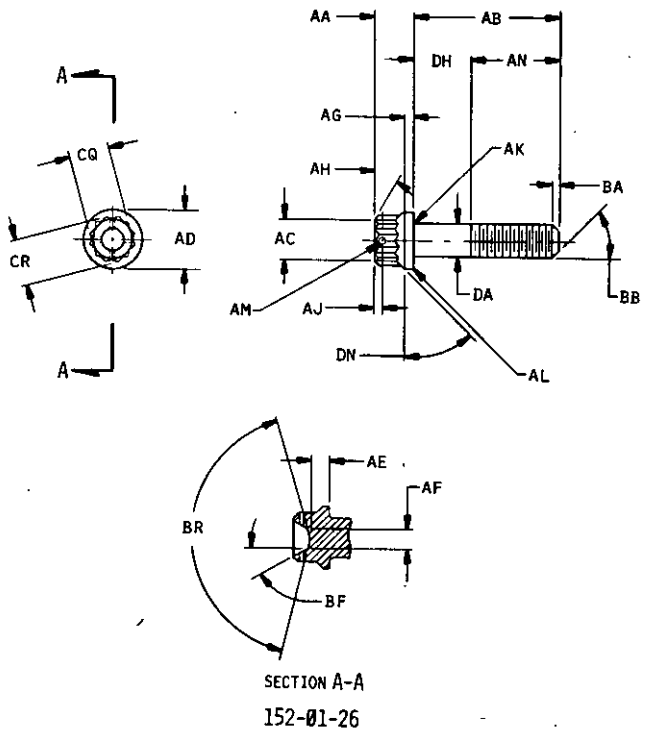


SECTION A-A

152-01-26

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

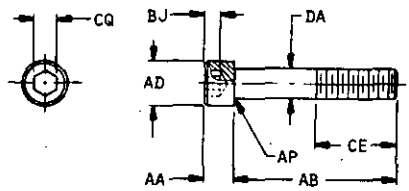


152-01-27

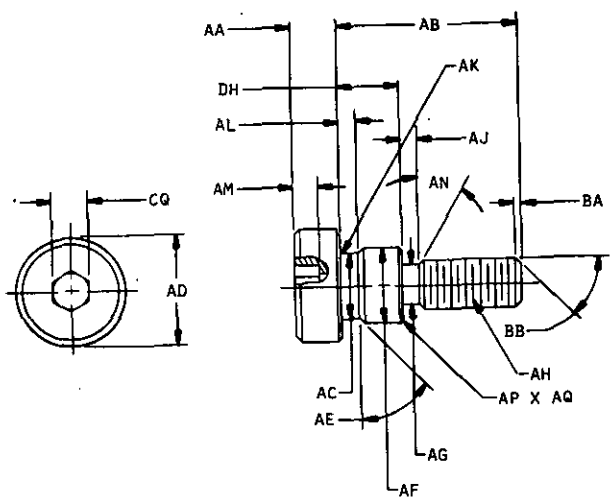

152-01-28

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

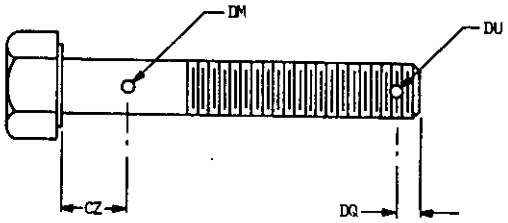

152-06-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	42	1761	50	2283	54	2565	94
0102	42	1763	50	2297	54	2567	94
0103	42	1765	50	2299	54	2571	98
0104	42	1767	50	2353	64	2573	98
0105	42	1769	50	2361	66	2633	56
0107	44	1771	50	2363	66	2639	94
0108	44	1773	50	2365	66	2641	94
0700	42	1775	50	2367	66	2645	56
0800	42	1777	50	2369	66	2651	56
1003	42	1781	70	2371	66	2653	56
1004	42	1783	70	2373	66	2655	56
1005	42	1785	70	2375	66	2657	56
1006	42	1787	70	2377	66	2658	56
1008	42	1789	72	2381	96	2662	56
1009	46	1791	72	2383	96	2664	56
1505	98	1793	72	2385	96	2666	58
1711	66	1795	72	2387	96	2668	58
1713	66	1797	72	2389	96	2672	58
1715	68	1799	72	2391	96	2674	58
1717	68	1831	74	2411	60	2676	58
1721	90	1833	74	2413	60	2678	58
1723	92	1865	74	2415	60	2701	74
1725	92	1867	74	2423	60	2703	74
1727	92	1871	72	2425	60	2705	74
1729	92	1873	72	2427	60	2707	74
1731	92	1901	50	2441	60	2709	76
1733	96	1921	58	2443	60	2711	76
1735	96	1931	60	2481	68	2713	76
1737	96	1938	58	2483	68	2715	76
1739	96	1941	58	2485	68	2717	76
1741	96	2133	62	2489	68	2719	76
1743	98	2139	62	2491	68	2721	76
1745	98	2141	62	2493	62	2723	76
1747	98	2143	62	2495	62	2725	76
1749	98	2150	62	2497	62	2727	78
1751	46	2153	62	2499	62	2729	78
1753	46	2155	64	2531	94	2731	78
1755	46	2157	64	2541	62	2733	78
1757	46	2159	64	2561	94	2735	78
1759	46	2281	54	2563	94	2737	78

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2739	78	2819	86	6372	100		
2741	78	2821	88	6870	100		
2743	78	2823	88	6873	42		
2745	78	2825	88	6874	44		
2747	78	2827	88	6941	44		
2749	80	2829	88	6942	44		
2751	80	2831	88	6991	102		
2753	80	2833	88	6992	102		
2755	80	2835	88	6993	102		
2757	80	2837	88	6994	102		
2759	80	2839	88	6995	102		
2761	80	2841	90	6996	54		
2763	80	2843	90	6997	54		
2765	80	2845	90	6998	54		
2767	80	2847	90	6999	54		
2769	80	2849	90	7001	100		
2771	82	2851	90	7002	100		
2773	82	2853	92	7003	100		
2775	82	2856	92	7004	100		
2777	82	2857	92	7005	100		
2779	82	2859	92	7021	52		
2781	82	2872	94	7022	52		
2783	82	2875	98	7023	52		
2785	82	2877	98	7024	52		
2787	84	2879	98	7041	52		
2789	84	2881	100	7042	52		
2791	84	2883	100	7043	52		
2793	84	4681	98	7044	52		
2795	84	4768	70	7572	46		
2797	84	4770	70	7577	46		
2799	84	4782	70	7580	48		
2801	84	4788	64	7629	100		
2803	86	4798	64				
2805	86	4799	64				
2807	86	4816	64				
2809	86	4878	68				
2811	86	4881	64				
2813	86	4905	46				
2815	86	4950	48				
2817	86	6369	42				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Additional Part Marking	102
Additional Requirements	100
Aperture Cards Required	44
Applicable Documents	102
Base Document	42
Bearing Surface	50
Bending	54
Carburization and Decarburization	56
Chemical Analysis	58
City, State, Zip	42
Class	46
Classification	46
Color	50
Company Name/Command	42
Composition	46
Configuration	46
Contract Number/Office Symbol	42
Control Source	42
Control Specification	44
Date	42
Design and Construction	50
Ductility	58
Fatigue Strength	60
Finishes	48
Format	42
Government Design Activity FSCM	42
Grade	46
Grain Flow	62
Hardness	62
Humidity	64
Hydrogen Embrittlement	64
Illustrations	48
Magnetic Permeability	66
Materials	48
Metals	48
Nomenclature	102
Notes	102

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Packaging	102
Part Marking	100
Part Number	44
Part Number Cross-Reference	102
Phone Number	42
Quality Assurance Provisions	102
Requester FSCM	42
Requester's Name	42
Resistance to Pullout	68
Revision of AEDPS Document (Number)	44
Salt Spray	68
Scope	44
Shear Strength (Double)	70
Shear Strength (Single)	72
Size	50
Source Table	44
Street/Building	42
Stress Corrosion	74
Stress Relaxation	76
Stress Rupture	78
Style	46
Superseded Document	102
Surface Defects	80
Surface Roughness	82
System Application	42
Tabulated Characteristics	48
Temperature Rating	46
Tensile Strength	84
Tension Fatigue	88
Thickness of Metallic Coating	90
Thread Forming	92
Threads	50
Torque, Locking	94
Torsional Strength	96
Type	46
Units of Measure	44, 46
Vibration	98
Weight/Mass	52
Workmanship	100

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:23Z
Check the source to verify that this is the currentversion before use.

The digital copy of DOD-STD-35-31A(MI), dated 23 March 1979 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-31A(MI), dated 23 March 1979 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-31A(MI), dated 23 March 1979 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
U.S. Army Missile R&D Command
ATTN: DRDMI-ESD
Redstone Arsenal, AL 35809

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.