DOD-STD-35-38A(MI)
15 February 1979
SUPERSEDING
MIL-STD-35-38(MI)
3 MAY 1974

MILITARY STANDARD

CRYSTAL UNITS (QUARTZ)

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

FSC EDS

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Crystal Units, Quartz
Automated Engineering
Document Preparation System

DOD-STD-35-38A(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-38A(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for Crystal Units, Quartz.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicity in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	3
	2.1	Issues of documents	3
	2.2	Other publications	3
	3.	DEFINITIONS	5
	4.	GENERAL REQUIREMENTS	7
	4.1	Introduction	7
	4.2	Specification Requirement Sheet (SRS)	7
	4.3	Configuration	7
	4.3.1	Dimensions	7
	4.3.2	Illustrations	7
	4.4	Units of measure	7
	5.	DETAILED REQUIREMENTS	9
	5.1	Introduction	9
	5.2	MSE Formats	9
	5.3	Referenced documents	9
	5.4	Tabulation	9
	5.5	Keyword Code Index (KCI) and Standard Paragraphs	11
	5.5.1	Interrelationship of Codes	11
	5.5.2	Automatic MSE Data	11
	5.5.3	DOD-STD-35 Tables	11

TABLES

Table	I.	Title Index	2
	II.	Tabulation candidates	10

APPENDICES

Appendix	A.	Illustrations	103
	B.	Characteristic Code Index	111
		Index	117

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for Crystal Units, Quartz.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. It is recommended that MIL-STD-683, Crystal Units (Quartz) and Crystal Holders (Enclosures), Selection of, be reviewed prior to using this dash-numbered part book.

The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:24Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
CRYSTAL UNITS, QUARTZ	064001	MIL-C-3098	GENERAL SPECIFICATION

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-C-3098	Crystal Units, Quartz, General Specification For

STANDARDS

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-683	Crystal Units (Quartz) and Crystal Holders (Enclosures), Selection Of
MIL-STD-1285	Marking of Electrical and Electronic Parts
MIL-STD-1523	Age Control of Age-Sensitive Elastomeric Materials

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTME380	Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, Pa. 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Crystal Units, Quartz.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for Crystal Units, Quartz, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Crystal Units, Quartz.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Crystal Units, Quartz.

4.3.2 Illustrations. Illustrations applicable to Crystal Units, Quartz are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a charactersitic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table II provides codes for column headings which may be used for Crystal Units, Quartz characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE II. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
7627	FREQUENCY RATING HERTZ	7628	FREQUENCY RATING MEGAHERTZ	7641	FREQUENCY RATING KILOHERTZ
1652	DRIVE LEVEL MINIMUM MILLIWATTS	1654	DRIVE LEVEL MAXIMUM MILLIWATTS	5069	OPR TEMP MAXIMUM DEG C
5068	OPR TEMP MINIMUM DEG C	7302	STOR TEMP MAXIMUM DEG C	7301	STOR TEMP MINIMUM DEG C
1626	FREQUENCY TOLERANCE (PERCENT)	1628	FREQUENCY STABILITY (PCT MIN)	1631	FREQUENCY STABILITY (PCT MAX)
5054	MAX AMB OPER TEMP DEG C	5052	MIN AMB OPER TEMP DEG C	1608	FREQUENCY RANGE (DES)
1590	CRYSTAL TYPE DES	1670	MIN ARESN LOAD CAP RTG (PF)	1672	MAX ARESN LOAD CAP RTG (PF)
1627	FREQUENCY TOLERANCE (PPM)	1629	FREQUENCY STABILITY (PPM)		

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

5.5 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.5.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.5.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.5.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT.	0700
ONE SECTION DOCUMENT.	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6874	THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).
0107	
0108	0108. SCOPE. SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.
	PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.
	PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.
6941	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.
6942	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION	
IN ACCORDANCE WITH THE BASE DOCUMENT	
TYPE (DESIGNATION)	1590
FREQUENCY RATING (SELECT ONE)	
(HERTZ)	7627
(MEGAHERTZ)	7628
(KILOHERTZ)	7641
FREQUENCY TOLERANCE RATING	
PLUS OR MINUS (PERCENT)	1626
PLUS OR MINUS (PARTS PER MILLION)	1627
FREQUENCY STABILITY RATING	
MINIMUM (PERCENT)	1628
MAXIMUM (PERCENT)	1631
PLUS OR MINUS (PARTS PER MILLION)	1629
MODE OF OSCILLATION RATING (SELECT ONE)	
FUNDAMENTAL.	1630
THIRD OVERTONE.	1632
FIFTH OVERTONE.	1634
SEVENTH OVERTONE.	1636

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CLASSIFICATION.
1590	TYPE 1590 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
	FREQUENCY RATING.
7627	THE FREQUENCY RATING SHALL BE 7627 HERTZ.
7628	THE FREQUENCY RATING SHALL BE 7628 MEGAHERTZ.
7641	THE FREQUENCY RATING SHALL BE 7641 KILOHERTZ.
	FREQUENCY TOLERANCE RATING.
1626	THE FREQUENCY TOLERANCE RATING SHALL BE PLUS OR MINUS 1626 PERCENT.
1627	THE FREQUENCY TOLERANCE RATING SHALL BE PLUS OR MINUS 1627 PARTS PER MILLION.
	FREQUENCY STABILITY RATING.
1628	THE FREQUENCY STABILITY RATING SHALL BE NOT LESS THAN 1628 PERCENT.
1631	THE FREQUENCY STABILITY RATING SHALL BE NOT GREATER THAN 1631 PERCENT.
1629	THE FREQUENCY STABILITY RATING SHALL BE PLUS OR MINUS 1629 PARTS PER MILLION.
	MODE OF OSCILLATION RATING.
1630	THE MODE OF OSCILLATION RATING SHALL BE FUNDAMENTAL.
1632	THE MODE OF OSCILLATION RATING SHALL BE THIRD OVERTONE.
1634	THE MODE OF OSCILLATION RATING SHALL BE FIFTH OVERTONE.
1636	THE MODE OF OSCILLATION RATING SHALL BE SEVENTH OVERTONE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FIGURE OF MERIT RATING	
(Q FACTOR)	1642
DRIVE LEVEL RATING	
MINIMUM (MILLIWATTS)	1652
MAXIMUM (MILLIWATTS)	1654
TYPE OF RESONANCE RATING (SELECT ONE)	
SERIES.	1658
ANTIRESONANCE.	1660
ANTIRESONANCE LOAD CAPACITANCE RATING	
MINIMUM (PICOFARADS)	1670
MAXIMUM (PICOFARADS)	1672
TEMPERATURE TYPE RATING (SELECT ONE)	
CONTROLLED.	1662
NONCONTROLLED.	1664
TEMPERATURE RATING	
MAXIMUM OPERATING (DEGREES CELSIUS)	5069
MAXIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5054

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	FIGURE OF MERIT RATING.
1642	THE FIGURE OF MERIT (Q FACTOR) RATING SHALL BE 1642.
	DRIVE LEVEL RATING.
1652	THE RATED DRIVE LEVEL SHALL BE NOT LESS THAN 1652 MILLIWATT(S).
1654	THE RATED DRIVE LEVEL SHALL BE NOT GREATER THAN 1654 MILLIWATT(S).
	TYPE OF RESONANCE RATING.
1658	THE TYPE OF RESONANCE RATING SHALL BE SERIES.
1660	THE TYPE OF RESONANCE RATING SHALL BE ANTIRESONANCE.
1670	THE MINIMUM ANTIRESONANCE LOAD CAPACITANCE RATING SHALL BE 1670 PICOFARADS.
1672	THE MAXIMUM ANTIRESONANCE LOAD CAPACITANCE RATING SHALL BE 1672 PICOFARADS.
	TEMPERATURE TYPE RATING.
1662	THE TEMPERATURE TYPE RATING SHALL BE CONTROLLED.
1664	THE TEMPERATURE TYPE RATING SHALL BE NONCONTROLLED.
	TEMPERATURE RATING.
5069	THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS.
5054	THE MAXIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5054 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE RATING (CONT)	
MAXIMUM STORAGE (DEGREES CELSIUS)	7302
MINIMUM OPERATING (DEGREES CELSIUS)	5068
MINIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5052
MINIMUM STORAGE (DEGREES CELSIUS)	7301
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
*UNITS (SELECT ONE)	
U.S.	
INCHES.	7572
SI (SELECT ONE)	
CENTIMETERS.	7576
MILLIMETERS.	7577

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7302	THE MAXIMUM STORAGE TEMPERATURE RATING SHALL BE 7302 DEGREES CELSIUS.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.
5052	THE MINIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5052 DEGREES CELSIUS.
7301	THE MINIMUM STORAGE TEMPERATURE RATING SHALL BE 7301 DEGREES CELSIUS.
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7576	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN CENTIMETERS OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ILLUSTRATIONS	
(NUMBER)	4950
NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.	
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	
MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE IX IS USED.	
METALS	
DISSIMILAR METALS.	7580

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.
	MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
	FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
7580	METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION	
HOLDER (SELECT ONE)	
METAL HERMETICALLY SEALED.	1562
GLASS HERMETICALLY SEALED.	1564
PLASTIC SEALED.	1566
OTHER ____	1568
CRYSTAL ELEMENT CUT (DESIGNATION)	1570
CRYSTAL MOUNTING (SELECT ONE)	
WIRE MOUNTED.	1600
PRESSURE MOUNTED.	1602
SPACER MOUNTED.	1604
FREQUENCY RANGE (DESIGNATION)	1608
WEIGHT	
MAXIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	DESIGN AND CONSTRUCTION.
	HOLDER.
1562	THE HOLDER SHALL BE METAL HERMETICALLY SEALED.
1564	THE HOLDER SHALL BE GLASS HERMETICALLY SEALED.
1566	THE HOLDER SHALL BE PLASTIC SEALED.
1568	THE HOLDER SHALL BE 1568.
1570	CRYSTAL ELEMENT CUT. THE CRYSTAL ELEMENT SHALL BE 1570 CUT.
	CRYSTAL MOUNTING.
1600	THE CRYSTAL SHALL BE WIRE MOUNTED.
1602	THE CRYSTAL SHALL BE PRESSURE MOUNTED.
1604	THE CRYSTAL SHALL BE SPACER MOUNTED.
1608	FREQUENCY RANGE. THE CRYSTAL FREQUENCY RANGE SHALL BE 1608.

7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7023	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).
7021	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
WEIGHT (CONT)	
NOMINAL WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	6996
(POUNDS)	6997
SI (SELECT ONE)	
(GRAMS)	6998
(KILOGRAMS)	6999
ACCELERATED AGING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1700
AS FOLLOWS:	1704
MAXIMUM FREQUENCY CHANGE (PERCENT)	1708
FREQUENCY CHANGE PERMITTED (PARTS PER MILLION)	1710
MAXIMUM RESISTANCE (OHMS)	1712
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1716

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6996	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6996 OUNCE(S).
6997	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6997 POUND(S).
6998	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6998 GRAM(S).
6999	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6999 KILOGRAM(S).
1700	ACCELERATED AGING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1700.
1704	ACCELERATED AGING. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1708	THE FREQUENCY CHANGE SHALL BE NOT GREATER THAN 1708 PERCENT.
1710	THE FREQUENCY CHANGE PERMITTED SHALL BE 1710 PARTS PER MILLION.
1712	THE EQUIVALENT RESISTANCE OF THE COMPONENT SHALL BE NOT GREATER THAN 1712 OHM(S).
1716	ACCELERATED AGING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1716.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATED AGING (CONT)	
TEST METHODS (CONT)	
PER MIL-C-3098.	1720
AGING TEMPERATURE (DEGREES CELSIUS)	1724
PLUS TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1728
MINUS TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1732
AGING DURATION (HOURS)	1736
STABILIZATION TIME (HOURS)	1740
ACCELERATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6272
NO EVIDENCE OF PHYSICAL DAMAGE.	6273
REMAIN WITHIN SPECIFIED TOLERANCE.	6277
MAXIMUM FREQUENCY CHANGE (PERCENT)	2502
MAXIMUM RESISTANCE (OHMS)	2506

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currenversion before use.

CHAR CODE	STANDARD PARAGRAPH
1720	ACCELERATED AGING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-3098.
1724	THE AGING TEMPERATURE SHALL BE 1724 DEGREES CELSIUS.
1728	THE PLUS TEMPERATURE TOLERANCE SHALL BE 1728 DEGREES CELSIUS.
1732	THE MINUS TEMPERATURE TOLERANCE SHALL BE 1732 DEGREES CELSIUS.
1736	THE AGING DURATION SHALL BE 1736 HOUR(S).
1740	THE COMPONENT SHALL BE ALLOWED TO STABILIZE AT ROOM AMBIENT FOR 1740 HOUR(S).
6272	ACCELERATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6272.
6273	ACCELERATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6277	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
2502	THE FREQUENCY CHANGE SHALL BE NOT GREATER THAN 2502 PERCENT.
2506	THE EQUIVALENT RESISTANCE SHALL BE NOT GREATER THAN 2506 OHM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATION (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6250
PER MIL-STD-202, METHOD 212.	6251
*TEST CONDITION LETTER (SELECT ONE)	
TEST CONDITION LETTER A.	6226
*LEVEL (SELECT ONE)	
20 G'S.	4863
50 G'S.	4864
100 G'S.	4865
TEST CONDITION LETTER B.	6233
*LEVEL (SELECT ONE)	
10,000 G'S.	4868
20,000 G'S.	4892
DIRECTION (SELECT ONE)	
ONE DIRECTION.	1557
BOTH DIRECTIONS.	1558
MOUNTING (SELECT ONE)	
MOUNT BY ANY SUITABLE METHOD.	6263
MOUNT BY NORMAL METHOD.	6264
MOUNT PER DOCUMENT (DOC DES)	6265

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6250	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6250.
6251	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 212 OF MIL-STD-202.
6226	TEST CONDITION LETTER A SHALL APPLY.
4863	THE TEST LEVEL SHALL BE 20 G'S.
4864	THE TEST LEVEL SHALL BE 50 G'S.
4865	THE TEST LEVEL SHALL BE 100 G'S.
6233	TEST CONDITION LETTER B SHALL APPLY.
4868	THE TEST LEVEL SHALL BE 10,000 G'S.
4892	THE TEST LEVEL SHALL BE 20,000 G'S.
1557	THE SPECIMEN SHALL BE ACCELERATED IN ONE DIRECTION ONLY.
1558	THE SPECIMEN SHALL BE ACCELERATED IN BOTH DIRECTIONS.
6263	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
6264	MOUNTING SHALL BE BY THE NORMAL METHOD.
6265	MOUNTING SHALL BE IN ACCORDANCE WITH 6265.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
AGING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1752
AS FOLLOWS:	1756
MAXIMUM FREQUENCY CHANGE (PERCENT)	1760
FREQUENCY CHANGE PERMITTED (PARTS PER MILLION)	1762
REMAIN WITHIN SPECIFIED TOLERANCES.	1764
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1768
PER MIL-C-3098.	1772
AGING TEMPERATURE (DEGREES CELSIUS)	1776
PLUS TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1780
MINUS TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1784
MEASUREMENT TEMPERATURE VARIATION (DEGREES CELSIUS)	1788
FREQUENCY MEASUREMENT INTERVALS (DAYS)	1792
TEST DURATION (DAYS)	1796

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1752	AGING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1752.
1756	AGING. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1760	THE FREQUENCY DIFFERENCE FROM THE INITIAL TO THE FINAL MEASUREMENT SHALL BE NOT GREATER THAN 1760 PERCENT.
1762	THE FREQUENCY CHANGE PERMITTED SHALL BE 1762 PARTS PER MILLION.
1764	THE COMPONENT SHALL REMAIN WITHIN SPECIFIED TOLERANCE(S).
1768	AGING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1768.
1772	AGING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-3098.
1776	THE AGING TEMPERATURE SHALL BE 1776 DEGREES CELSIUS.
1780	THE PLUS TEMPERATURE TOLERANCE SHALL BE 1780 DEGREES CELSIUS.
1784	THE MINUS TEMPERATURE TOLERANCE SHALL BE 1784 DEGREES CELSIUS.
1788	THE DIFFERENCE BETWEEN THE INITIAL MEASUREMENT TEMPERATURE AND SUBSEQUENT MEASUREMENT TEMPERATURES SHALL BE NOT GREATER THAN 1788 DEGREES CELSIUS.
1792	THE INTERVAL BETWEEN FREQUENCY MEASUREMENTS SHALL BE 1792 DAY(S).
1796	THE TEST DURATION SHALL BE 1796 DAY(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
BOND STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1800
AS FOLLOWS:	1804
MINIMUM BOND STRENGTH (GRAMS)	1808
BREAKAGE OF RESONATOR NOT A FAILURE.	1812
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1816
PER MIL-C-3098.	1820
TEST FORCE APPLICATION (SELECT ONE)	
SHEAR.	1824
TENSION.	1828
TEST FORCE TIME (SELECT ONE)	
(MINUTES)	1832
(SECONDS)	1836

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1800	BOND STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1800.
1804	BOND STRENGTH. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1808	THE BOND STRENGTH OF THE JUNCTION BETWEEN EACH SUPPORT AND THE SURFACE OF THE RESONATOR SHALL BE NOT LESS THAN 1808 GRAM(S).
1812	BREAKAGE OF THE QUARTZ RESONATOR DURING TEST SHALL NOT CONSTITUTE FAILURE.
1816	BOND STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1816.
1820	BOND STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-3098.
1824	THE TEST FORCE SHALL BE APPLIED IN SHEAR.
1828	THE TEST FORCE SHALL BE APPLIED IN TENSION.
1832	THE TEST FORCE SHALL BE APPLIED FOR 1832 MINUTE(S).
1836	THE TEST FORCE SHALL BE APPLIED FOR 1836 SECOND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CAPACITANCE, SHUNT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1910
AS FOLLOWS:	1914
MAXIMUM SHUNT CAPACITANCE (PICOFARADS)	1918
MINIMUM SHUNT CAPACITANCE (PICOFARADS)	1920
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1922
PER METHOD 305 OF MIL-STD-202.	1926
TEST FREQUENCY (SELECT ONE)	
(KILOHERTZ)	1930
(MEGAHERTZ)	1934
LIMIT OF ACCURACY OF MEASUREMENT (PERCENT)	1938
POLARIZING VOLTAGE (VOLTS DC)	1942
CAPACITANCE MEASUREMENT POINTS.	1946

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1910	CAPACITANCE, SHUNT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1910.
1914	CAPACITANCE, SHUNT. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1918	THE SHUNT CAPACITANCE SHALL BE NOT GREATER THAN 1918 PICOFARAD(S).
1920	THE SHUNT CAPACITANCE SHALL BE NOT LESS THAN 1920 PICOFARAD(S).
1922	CAPACITANCE, SHUNT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1922.
1926	CAPACITANCE, SHUNT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 305 OF MIL-STD-202.
1930	THE TEST FREQUENCY SHALL BE 1930 KILOHERTZ.
1934	THE TEST FREQUENCY SHALL BE 1934 MEGAHERTZ.
1938	THE LIMIT OF ACCURACY OF THE MEASUREMENT SHALL BE PLUS OR MINUS 1938 PERCENT.
1942	THE MAGNITUDE OF THE POLARIZING VOLTAGE SHALL BE 1942 VOLT(S) DC.
1946	THE CAPACITANCE SHALL BE MEASURED FROM PIN-TO-PIN, WITH THE CRYSTAL HOLDER UNGROUNDED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4908
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4906
MAXIMUM LEAKAGE (MILLIAMPERES)	4894
REMAIN WITHIN SPECIFIED TOLERANCE.	4901
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4884
PER MIL-STD-202, METHOD 301.	6300
*ALTITUDE PER METHOD 105 OF MIL-STD-202	
*TEST CONDITION (LETTER)	4886
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4885
(VOLTS, AC)	4849

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4908	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4908.
4906	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4894	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4894 MILLIAMPERE(S).
4901	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4884	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4884.
6300	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.
4886	ALTITUDE SHALL BE IN ACCORDANCE WITH TEST CONDITION LETTER 4886 OF METHOD 105 OF MIL-STD-202.
4885	TEST VOLTAGE SHALL BE 4885 VOLTS, DC.
4849	TEST VOLTAGE SHALL BE 4849 VOLTS, AC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	6311
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	6312
BETWEEN MUTUALLY INSULATED PARTS.	6292
BETWEEN ALL INSULATED PARTS AND GROUND.	6293
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	6294
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4859
DURATION OF VOLTAGE APPLICATION (SECONDS)	4891
MOUNTING PER DOCUMENT (DOC DES)	6280
REGULATION OF TEST VOLTAGE (PERCENT)	6308
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4900

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:

6311 BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.

6312 BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.

6292 BETWEEN MUTUALLY INSULATED PARTS.

6293 BETWEEN ALL INSULATED PARTS AND GROUND.

6294 BETWEEN CURRENT CARRYING PARTS AND THE CASE.

4859 SPECIAL PREPARATION SHALL BE IN ACCORDANCE WITH 4859.

4891 DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4891 SECOND(S).

6280 MOUNTING SHALL BE IN ACCORDANCE WITH 6280.

6308 REGULATION OF THE TEST VOLTAGE SHALL BE WITHIN 6308 PERCENT.

4900 THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4900 KILOVOLTAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4902
(MILLIAMPERES)	6310
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4874
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4856
MAXIMUM LEAKAGE (MILLIAMPERES)	4875
REMAIN WITHIN SPECIFIED TOLERANCE.	4847
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4861

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4902	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4902 AMPERE(S).
6310	THE SURGE CURRENT SHALL BE NOT GREATER THAN 6310 MILLIAMPERE(S).
4874	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.
4856	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4875	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4875 MILLIAMPERE(S).
4847	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4861	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 301.	4862
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4854
(VOLTS, AC)	4855
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	4842
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	4848
BETWEEN MUTUALLY INSULATED PARTS.	4844
BETWEEN ALL INSULATED PARTS AND GROUND.	4845
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	4846
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4850
DURATION OF VOLTAGE APPLICATION (SECONDS)	4867

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4862	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.
4854	TEST VOLTAGE SHALL BE 4854 VOLTS, DC.
4855	TEST VOLTAGE SHALL BE 4855 VOLTS, AC.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
4842	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
4848	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
4844	BETWEEN MUTUALLY INSULATED PARTS.
4845	BETWEEN ALL INSULATED PARTS AND GROUND.
4846	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
4850	SPECIAL PREPARATION OR CONDITIONS SHALL BE IN ACCORDANCE WITH 4850.
4867	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4867 SECOND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
MOUNTING PER DOCUMENT (DOC DES)	5000
REGULATION OF TEST VOLTAGE (PERCENT)	4869
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4870
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4717
(MILLIAMPERES)	4897
METHOD OF VOLTAGE CONNECTION PER DOCUMENT (DOC DES)	6267
FREQUENCY AND EQUIVALENT RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2004
AS FOLLOWS:	2008
FREQUENCY (SELECT ONE)	
(KILOHERTZ)	2012
(MEGAHERTZ)	2016

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
5000	MOUNTING SHALL BE IN ACCORDANCE WITH 5000.
4869	REGULATION OF TEST VOLTAGE SHALL BE WITHIN 4869 PERCENT.
4870	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4870 KILOVOLTAMPERE(S).
4717	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4717 AMPERE(S).
4897	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4897 MILLIAMPERE(S).
6267	METHOD OF CONNECTION OF TEST VOLTAGE SHALL BE IN ACCORDANCE WITH 6267.
2004	FREQUENCY AND EQUIVALENT RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2004.
2008	FREQUENCY AND EQUIVALENT RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2012	THE FREQUENCY OF THE COMPONENT SHALL BE 2012 KILOHERTZ.
2016	THE FREQUENCY OF THE COMPONENT SHALL BE 2016 MEGAHERTZ.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FREQUENCY AND EQUIVALENT RESISTANCE (CONT)	
AS FOLLOWS: (CONT)	
FREQUENCY TOLERANCE (SELECT ONE)	
PARTS PER MILLION TOLERANCE	
PLUS TOLERANCE (PARTS PER MILLION)	2018
MINUS TOLERANCE (PARTS PER MILLION)	2022
PERCENT TOLERANCE	
PLUS TOLERANCE (PERCENT)	2026
MINUS TOLERANCE (PERCENT)	2030
MAXIMUM EQUIVALENT RESISTANCE (OHMS)	2034
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2038
PER MIL-C-3098.	2042
TEMPERATURE CONDITIONS (SELECT ONE)	
NONCONTROLLED, ROOM TEMPERATURE.	2046
CONTROLLED, REFERENCE TEMPERATURE (DEGREES CELSIUS)	2050

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2018	THE PLUS FREQUENCY TOLERANCE SHALL BE 2018 PARTS PER MILLION.
2022	THE MINUS FREQUENCY TOLERANCE SHALL BE 2022 PARTS PER MILLION.
2026	THE PLUS FREQUENCY TOLERANCE SHALL BE 2026 PERCENT.
2030	THE MINUS FREQUENCY TOLERANCE SHALL BE 2030 PERCENT.
2034	THE EQUIVALENT RESISTANCE OF THE COMPONENT SHALL BE NOT GREATER THAN 2034 OHM(S).
2038	FREQUENCY AND EQUIVALENT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2038.
2042	FREQUENCY AND EQUIVALENT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-3098.
2046	THE FREQUENCY AND EQUIVALENT RESISTANCE MEASUREMENTS SHALL BE MADE WITH THE COMPONENT IN THERMAL EQUILIBRIUM AT ROOM TEMPERATURE.
2050	THE FREQUENCY AND EQUIVALENT RESISTANCE MEASUREMENTS SHALL BE MADE WITH THE COMPONENT IN THERMAL EQUILIBRIUM AT 2050 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FREQUENCY AND EQUIVALENT RESISTANCE (CONT)	
PER MIL-C-3098. (CONT)	
DRIVE LEVEL (MILLIWATTS)	2054
IMMERSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4819
NO EVIDENCE OF PHYSICAL DAMAGE.	4820
REMAIN WITHIN SPECIFIED TOLERANCE.	4822
MINIMUM INSULATION RESISTANCE (MEGOHMS)	4825
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4809
PER MIL-STD-202, METHOD 104.	4810
*TEST CONDITION (LETTER)	4811
MEASUREMENTS AFTER FINAL CYCLE (HOURS)	4812
TIME BEFORE MEASUREMENTS AFTER FINAL CYCLE (HOURS)	4814

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2054	THE DRIVE LEVEL SHALL BE 2054 MILLIWATT(S).
4819	IMMERSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4819.
4820	IMMERSION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4822	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4825	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 4825 MEGOHM(S).
4809	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4809.
4810	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 104 OF MIL-STD-202.
4811	TEST CONDITION LETTER 4811 SHALL APPLY.
4812	FINAL MEASUREMENT(S) SHALL BE MADE WITHIN 4812 HOUR(S) AFTER FINAL CYCLE.
4814	MEASUREMENTS SHALL BE NOT MADE UNTIL 4814 HOUR(S) AFTER THE FINAL CYCLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1380
AS FOLLOWS:	6359
*MINIMUM INSULATION RESISTANCE (SELECT ONE)	
SINGLE TEST	
(MEGOHMS)	1386
MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	1384
*SECOND TEST (MEGOHMS)	1387
REMAIN WITHIN SPECIFIED TOLERANCE.	1388
NO EVIDENCE OF PHYSICAL DAMAGE.	1407
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1371

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1380	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.
6359	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1386	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 1386 MEGOHM(S).
1384	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1384 MEGOHM(S) AT THE FIRST TEST TEMPERATURE.
1387	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1387 MEGOHM(S) AT THE SECOND TEST TEMPERATURE.
1388	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1407	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1371	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 302.	1511
*CONDITION (SELECT ONE)	
TEST CONDITION (LETTER)	1378
TEST VOLTAGE (VOLTS, DC)	1373
ELECTRIFICATION TIME (SECONDS)	1376
MAXIMUM MEASUREMENT ERROR AT REQUIRED VALUE (PERCENT)	1377
POINTS OF APPLICATION OF TEST VOLTAGE:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	1497
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	1498
BETWEEN MUTUALLY INSULATED PARTS.	1522
BETWEEN INSULATED PARTS AND GROUND.	1523
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	1524

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1511	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 302 OF MIL-STD-202.
1378	TEST CONDITION LETTER 1378 SHALL APPLY.
1373	TEST POTENTIAL SHALL BE 1373 VOLTS, DC.
1376	ELECTRIFICATION DURATION SHALL BE 1376 SECOND(S).
1377	THE MEASUREMENT ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1377 PERCENT.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
1497	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
1498	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
1522	BETWEEN MUTUALLY INSULATED PARTS.
1523	BETWEEN ALL INSULATED PARTS AND GROUND.
1524	BETWEEN CURRENT CARRYING PARTS AND THE CASE.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 302. (CONT)	
SPECIAL PREPARATIONS OR CONDITIONS PER DOCUMENT (DOC DES)	1520
FIRST TEST TEMPERATURE (DEGREES CELSIUS)	1372
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	1381
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1383
LOW TEMPERATURE STORAGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2100
AS FOLLOWS:	2104
FREQUENCY (SELECT ONE)	
(KILOHERTZ)	2108
(MEGAHERTZ)	2112
FREQUENCY TOLERANCE (PERCENT)	2116
MAXIMUM EQUIVALENT RESISTANCE (OHMS)	2120
FREQUENCY CHANGE PERMITTED (PARTS PER MILLION)	2121
EQUIVALENT RESISTANCE CHANGE PERMITTED (PERCENT)	2122

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1520	SPECIAL PREPARATIONS OR CONDITIONS SHALL BE IN ACCORDANCE WITH 1520.
1372	FIRST TEST TEMPERATURE SHALL BE 1372 DEGREES CELSIUS.
1381	SECOND TEST TEMPERATURE SHALL BE 1381 DEGREES CELSIUS.
1383	TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1383 DEGREES CELSIUS.
2100	LOW TEMPERATURE STORAGE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2100.
2104	LOW TEMPERATURE STORAGE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2108	THE FREQUENCY OF THE COMPONENT SHALL BE 2108 KILOHERTZ.
2112	THE FREQUENCY OF THE COMPONENT SHALL BE 2112 MEGAHERTZ.
2116	THE ALLOWABLE FREQUENCY TOLERANCE SHALL BE PLUS OR MINUS 2116 PERCENT.
2120	THE EQUIVALENT RESISTANCE OF THE COMPONENT SHALL BE NOT GREATER THAN 2120 OHM(S).
2121	THE FREQUENCY CHANGE PERMITTED SHALL BE 2121 PARTS PER MILLION.
2122	THE EQUIVALENT RESISTANCE CHANGE PERMITTED SHALL BE 2122 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LOW TEMPERATURE STORAGE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2124
PER MIL-C-3098.	2128
MOISTURE RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1400
AS FOLLOWS:	2520
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	2522
REMAIN WITHIN SPECIFIED TOLERANCE.	1398
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	1406
FREQUENCY CHANGE PERMITTED (PARTS PER MILLION)	2524
EQUIVALENT RESISTANCE CHANGE PERMITTED (PERCENT)	2526
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1391

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2124	LOW TEMPERATURE STORAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2124.
2128	LOW TEMPERATURE STORAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-3098.
1400	MOISTURE RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1400.
2520	MOISTURE RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2522	THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
1398	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1406	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1406 MEGOHM(S) AFTER DRYING.
2524	THE FREQUENCY CHANGE PERMITTED SHALL BE 2524 PARTS PER MILLION.
2526	THE EQUIVALENT RESISTANCE CHANGE PERMITTED SHALL BE 2526 PERCENT.
1391	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1391.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 106.	1397
STEP 7B NOT APPLICABLE.	4986
MOUNT PER DOCUMENT (DOC DES)	1449
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	4984
PERFORM FREQUENCY AND EQUIVALENT RESISTANCE MEASUREMENTS AFTER DRYING.	2550
RADIOGRAPHIC	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6291
NO INHOMOGENEITIES, FOREIGN PARTICLES, INCORRECT ALIGNMENT, DEFECTS.	6371
*DISPOSITION OF NEGATIVES OR RECORDS (SELECT ONE)	
DELIVERED.	4857
NOT DELIVERED.	4858

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1397	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 106 OF MIL-STD-202.
4986	STEP 7B OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
1449	MOUNTING SHALL BE IN ACCORDANCE WITH 1449.
4984	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.
2550	THE FREQUENCY AND EQUIVALENT RESISTANCE SHALL BE MEASURED AFTER DRYING.
6291	RADIOGRAPHIC. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6291.
6371	RADIOGRAPHIC. THE EXAMINATION OF THE RADIOGRAPHS OF THE ITEMS SHALL SHOW: NO INHOMOGENEITIES, NO FOREIGN PARTICLES WITHIN THE ENCLOSURE, ALL PARTS CORRECTLY ALIGNED WITH EACH OTHER, NO DEFECTIVE WORKMANSHIP DETAILS, OR ANY OTHER DEFECTS SPECIFIED HEREIN. MANUFACTURERS SHALL PROVIDE A MEANS OF IDENTIFYING ITEMS ON THE NEGATIVES (OR NONFILM RECORDS, IF APPLICABLE).
4857	NEGATIVES (OR NONFILM RECORDS, IF APPLICABLE) SHALL BE DELIVERED WITH EACH SHIPMENT OF ITEMS.
4858	NEGATIVES (OR NONFILM RECORDS, IF APPLICABLE) SHALL BE MADE AVAILABLE FOR EXAMINATION UPON REQUEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RADIOGRAPHIC (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6282
PER MIL-STD-202, METHOD 209.	4843
SOURCE-OBJECT DISTANCE (SELECT ONE)	
(METERS)	6286
(INCHES)	6285
VIEWING EQUIPMENT (IDENTIFY) ____	6287
MAGNIFICATION (X-POWER)	6288
DEFECTS SOUGHT (IDENTIFY) ____	6289
NONFILM TECHNIQUES ALLOWED.	6284
PENETRAMETER WIRE SIZE (SELECT ONE)	
(AWG)	6283
(MILLIMETERS)	5297

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6282	RADIOGRAPHIC. RADIOGRAPHIC INSPECTION SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6282.
4843	RADIOGRAPHIC. RADIOGRAPHIC INSPECTION SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 209 OF MIL-STD-202.
6286	THE SOURCE-OBJECT DISTANCE (THE DISTANCE FROM THE FOCAL SPOT OF THE X-RAY TUBE TO THE OBJECT BEING RADIOGRAPHED) SHALL BE 6286 METER(S).
6285	THE SOURCE-OBJECT DISTANCE (THE DISTANCE FROM THE FOCAL SPOT OF THE X-RAY TUBE TO THE OBJECT BEING RADIOGRAPHED) SHALL BE 6285 INCHES.
6287	THE VIEWING EQUIPMENT SHALL BE 6287.
6288	THE IMAGES SHALL BE VIEWED 6288 X-POWER MAGNIFICATION.
6289	THE DEFECTS TO BE SOUGHT SHALL BE 6289.
6284	NONFILM TECHNIQUES MAY BE USED, IF DESIRED. RECORDS SHALL BE MAINTAINED, FOR EXAMINATION OR DELIVERY, AS SPECIFIED.
6283	TO FURTHER INSURE ADEQUATE QUALITY, A RADIOGRAPH OF THE PENETRAMETER SHALL BE INCLUDED ON EACH RADIOGRAPHIC FILM. THE PENETRAMETER SHALL BE MADE FROM A SAMPLE ITEM OF THE SAME TYPE AS THE ITEM BEING INSPECTED (RADIOGRAPHED). THE PENETRAMETER SHOULD UTILIZE AN AWG SIZE 6283 COPPER WIRE ON THE SIDE OF THE ITEM FARTHEST FROM THE X-RAY FILM.
5297	TO FURTHER INSURE ADEQUATE QUALITY, A RADIOGRAPH OF THE PENETRAMETER SHALL BE INCLUDED ON EACH RADIOGRAPHIC FILM. THE PENETRAMETER SHALL BE MADE FROM A SAMPLE ITEM OF THE SAME TYPE AS THE ITEM BEING INSPECTED (RADIOGRAPHED). THE PENETRAMETER SHOULD UTILIZE A 5297 MILLIMETER COPPER WIRE ON THE SIDE OF THE ITEM FARTHEST FROM THE X-RAY FILM.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RANDOM DROP	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4967
AS FOLLOWS:	2150
NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.	2152
FREQUENCY CHANGE PERMITTED (PARTS PER MILLION)	2154
EQUIVALENT RESISTANCE CHANGE PERMITTED (PERCENT)	2156
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4963
PER MIL-STD-202, METHOD 203.	4972
REDUCED DRIVE LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2200
AS FOLLOWS:	2204
MAXIMUM EQUIVALENT RESISTANCE (OHMS)	2208
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2212

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
4967	RANDOM DROP. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4967.
2150	RANDOM DROP. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2152	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
2154	THE FREQUENCY CHANGE PERMITTED SHALL BE 2154 PARTS PER MILLION.
2156	THE EQUIVALENT RESISTANCE CHANGE PERMITTED SHALL BE 2156 PERCENT.
4963	RANDOM DROP. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4963.
4972	RANDOM DROP. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 203 OF MIL-STD-202.
2200	REDUCED DRIVE LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2200.
2204	REDUCED DRIVE LEVEL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2208	THE EQUIVALENT RESISTANCE SHALL BE NOT GREATER THAN 2208 OHM(S).
2212	REDUCED DRIVE LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2212.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
REDUCED DRIVE LEVEL (CONT)	
TEST METHODS (CONT)	
PER MIL-C-3098.	2216
RESISTANCE TO SOLDERING HEAT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4700
NO EVIDENCE OF PHYSICAL DAMAGE.	4701
REMAIN WITHIN SPECIFIED TOLERANCE.	4718
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4689
PER MIL-STD-202, METHOD 210.	4698
*TEST CONDITION (LETTER)	4691
NUMBER OF TERMINATIONS TESTED (QUANTITY)	4694
DEPTH OF IMMERSION IN SOLDER (SELECT ONE)	
(INCHES)	4692
(MILLIMETERS)	4669
IMMERSION IN FLUX PERMITTED.	4671
SPECIAL PREPARATIONS PERMITTED.	4989
COOLING TIME (MINUTES)	4695

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2216	REDUCED DRIVE LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-3098.
4700	RESISTANCE TO SOLDERING HEAT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4700.
4701	RESISTANCE TO SOLDERING HEAT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4718	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4689	RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4689.
4698	RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 210 OF MIL-STD-202.
4691	TEST CONDITION LETTER 4691 SHALL APPLY.
4694	4694 TERMINATION(S) PER UNIT SHALL BE TESTED.
4692	DEPTH OF IMMERSION IN SOLDER SHALL BE 4692 INCH(S).
4669	DEPTH OF IMMERSION IN SOLDER SHALL BE 4669 MILLIMETER(S).
4671	IMMERSION OF TERMINATION IN FLUX SHALL BE PERMITTED.
4989	SPECIAL PREPARATION SHALL BE PERMITTED.
4695	COOLING TIME SHALL BE 4695 MINUTES PRIOR TO FINAL EXAMINATION AND MEASUREMENTS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT SPRAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4878
AS FOLLOWS:	2600
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE.	2602
FREQUENCY AND RESISTANCE REMAIN WITHIN SPECIFIED TOLERANCES.	2603
FREQUENCY CHANGE PERMITTED (PARTS PER MILLION)	2604
EQUIVALENT RESISTANCE CHANGE PERMITTED (PERCENT)	2605
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4770
PER MIL-STD-202, METHOD 101.	4771
*TEST CONDITION (LETTER)	4772
MOUNTING (SELECT ONE)	
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4773
MOUNTING SHALL BE BY NORMAL METHOD.	4765
MOUNTING SHALL BE BY ANY SUITABLE METHOD.	4766
MEASURE FREQUENCY AND RESISTANCE AFTER TEST.	2606

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4878	SALT SPRAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4878.
2600	SALT SPRAY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2602	THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
2603	THE FREQUENCY AND EQUIVALENT RESISTANCE SHALL REMAIN WITHIN SPECIFIED TOLERANCE(S).
2604	THE FREQUENCY CHANGE PERMITTED SHALL BE 2604 PARTS PER MILLION.
2605	THE EQUIVALENT RESISTANCE CHANGE PERMITTED SHALL BE 2605 PERCENT.
4770	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4770.
4771	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 101 OF MIL-STD-202.
4772	TEST CONDITION LETTER 4772 SHALL APPLY.
4773	MOUNTING SHALL BE IN ACCORDANCE WITH 4773.
4765	MOUNTING SHALL BE BY THE NORMAL METHOD.
4766	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
2606	THE FREQUENCY AND EQUIVALENT RESISTANCE SHALL BE MEASURED AFTER TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4745
AS FOLLOWS:	6370
MAXIMUM LEAKAGE RATE (ATM CC/SEC)	2702
BLUE GLOW EVIDENCE OF SEAL.	2706
FREQUENCY CHANGE PERMITTED (PARTS PER MILLION)	2704
EQUIVALENT RESISTANCE CHANGE PERMITTED (PERCENT)	2708
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4734
PER MIL-STD-202, METHOD 112.	4732
*TEST CONDITION LETTER	
LETTER C.	6323
*LEAK RATE SENSITIVITY (ATM CC/SEC)	4741
*TEST PROCEDURE (SELECT ONE)	
TEST PROCEDURE III.	6328
GROSS LEAK TEST CONDITION (LETTER)	4750

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4745	SEAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4745.
6370	SEAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2702	THE LEAKAGE RATE SHALL BE NOT GREATER THAN 2702 ATM CC/SEC.
2706	THE PRESENCE OF A BLUE GLOW INSIDE THE GLASS ENVELOPE SHALL BE EVIDENCE OF A SATISFACTORY SEAL.
2704	THE FREQUENCY CHANGE PERMITTED SHALL BE 2704 PARTS PER MILLION.
2708	THE EQUIVALENT RESISTANCE CHANGE PERMITTED SHALL BE 2708 PERCENT.
4734	SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4734.
4732	SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 112 OF MIL-STD-202.
6323	TEST CONDITION LETTER C SHALL APPLY.
4741	LEAK SENSITIVITY RATE SHALL BE 4741 ATM CC/SEC.
6328	PROCEDURE NUMBER III SHALL APPLY.
4750	GROSS LEAK TEST CONDITION LETTER 4750 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
TEST PROCEDURE (CONT)	
TEST PROCEDURE IV.	6329
CHAMBER PRESSURE (SELECT ONE)	
(TORR)	4751
(KILOPASCALS)	4735
DURATION OF REDUCED PRESSURE (MINUTES)	4752
GROSS LEAK TEST CONDITION (LETTER)	6330
PER MIL-C-3098.	2710
TEST TEMPERATURE (DEGREES CELSIUS)	2714
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2718
TEMPERATURE HOLDING DURATION (MINUTES)	2722
STORAGE PERIOD (HOURS)	2726
HEAT CYCLES (NUMBER)	2730

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6329	PROCEDURE NUMBER IV SHALL APPLY.
4751	CHAMBER PRESSURE SHALL BE 4751 TORR.
4735	CHAMBER PRESSURE SHALL BE 4735 KILOPASCALS.
4752	DURATION AT LOW PRESSURE SHALL BE 4752 MINUTE(S).
6330	GROSS LEAK TEST CONDITION LETTER 6330 SHALL APPLY.
2710	SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-3098.
2714	THE TEST TEMPERATURE SHALL BE 2714 DEGREES CELSIUS.
2718	THE TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2718 DEGREES CELSIUS.
2722	THE COMPONENT SHALL BE HELD AT THE TEST TEMPERATURE FOR 2722 MINUTE(S).
2726	THE COMPONENT SHALL BE STORED AT ROOM TEMPERATURE FOR 2726 HOUR(S).
2730	THERE SHALL BE 2730 HEAT CYCLES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, SPECIFIED PULSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1508
AS FOLLOWS:	2750
NO EVIDENCE OF PHYSICAL DAMAGE.	2752
FREQUENCY CHANGE PERMITTED (PARTS PER MILLION)	2756
EQUIVALENT RESISTANCE CHANGE PERMITTED (PERCENT)	2758
MEASUREMENTS BEFORE AND AFTER TEST.	2754
REMAIN WITHIN SPECIFIED TOLERANCE.	4703
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1502
PER MIL-STD-202, METHOD 213.	1500
*TEST CONDITION (LETTER)	1504
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	4686
NORMAL MOUNTING METHOD.	4685
SOLDERABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4674

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1508	SHOCK, SPECIFIED PULSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1508.
2570	SHOCK, SPECIFIED PULSE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2752	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2756	FREQUENCY CHANGE PERMITTED SHALL BE 2756 PARTS PER MILLION.
2758	EQUIVALENT RESISTANCE CHANGE PERMITTED SHALL BE 2758 PERCENT.
2754	FREQUENCY AND EQUIVALENT RESISTANCE MEASUREMENTS SHALL BE MADE BEFORE AND AFTER TEST.
4703	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1502	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1502.
1500	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 213 OF MIL-STD-202.
1504	TEST CONDITION LETTER 1504 SHALL APPLY.
4686	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4685	MOUNTING SHALL BE BY THE NORMAL METHOD.
4674	SOLDERABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4674.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SOLDERABILITY (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE.	4675
MEET EVALUATION CRITERIA SPECIFIED IN METHOD 208 OF MIL-STD-202.	4672
REMAIN WITHIN SPECIFIED TOLERANCE.	4677
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4662
PER MIL-STD-202, METHOD 208.	4683
NUMBER OF TERMINALS TO BE TESTED (QUANTITY)	4666
DEPTH OF IMMERSION (SELECT ONE)	
(INCHES)	4667
(MILLIMETERS)	4663
DISTANCE WRAP WIRE APPLIED FROM BODY (SELECT ONE)	
(INCHES)	4664
(MILLIMETERS)	4665
SPECIAL PREPARATIONS PERMITTED.	6205

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4675	SOLDERABILITY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4672	THE RESULTS OF THE SOLDERABILITY TEST SHALL BE IN ACCORDANCE WITH THE ACCEPTANCE CRITERIA OF METHOD 208 OF MIL-STD-202.
4677	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4662	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4662.
4683	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 208 OF MIL-STD-202.
4666	4666 TERMINATION(S) PER UNIT SHALL BE TESTED.
4667	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4667 INCH(S).
4663	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4663 MILLIMETER(S).
4664	THE WRAP WIRE SHALL BE 4664 INCH(S) FROM THE BODY.
4665	THE WRAP WIRE SHALL BE 4665 MILLIMETER(S) FROM THE BODY.
6205	SPECIAL PREPARATION SHALL BE PERMITTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE RUN	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2302
AS FOLLOWS:	2306
REMAIN WITHIN SPECIFIED FREQUENCY AND EQUIVALENT RESISTANCE TOLERANCES.	2310
CONFORM TO OPERATING TEMPERATURE RATING RANGE.	2311
FREQUENCY CHANGE PERMITTED (PARTS PER MILLION)	2312
EQUIVALENT RESISTANCE CHANGE PERMITTED (PERCENT)	2313
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2314
PER MIL-C-3098.	2318
TEMPERATURE CONDITIONS (SELECT ONE)	
CONTROLLED TYPE (SELECT ONE)	
METHOD A, CONTINUOUS MEASUREMENT.	2322
RATE OF TEMPERATURE CHANGE (DEGREES CELSIUS PER MINUTE)	2326

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2302	TEMPERATURE RUN. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2302.
2306	TEMPERATURE RUN. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2310	THE COMPONENT SHALL REMAIN WITHIN SPECIFIED FREQUENCY AND EQUIVALENT RESISTANCE TOLERANCES.
2311	THE COMPONENT SHALL CONFORM TO THE OPERATING TEMPERATURE RATING RANGE.
2312	THE FREQUENCY CHANGE PERMITTED SHALL BE 2312 PARTS PER MILLION.
2313	THE EQUIVALENT RESISTANCE CHANGE PERMITTED SHALL BE 2313 PERCENT.
2314	TEMPERATURE RUN. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2314.
2318	TEMPERATURE RUN. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-3098.
2322	THE MEASUREMENTS SHALL BE TAKEN CONTINUOUSLY OVER THE OPERATING TEMPERATURE RANGE.
2326	THE RATE OF TEMPERATURE CHANGE SHALL BE 2326 DEGREES CELSIUS PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE RUN (CONT)	
CONTROLLED TYPE (CONT)	
METHOD B, INCREMENTAL MEASUREMENT.	2330
TEMPERATURE INTERVALS (DEGREES CELSIUS)	2334
MAXIMUM RATE OF TEMPERATURE CHANGE (DEGREES CELSIUS PER SECOND)	2336
NONCONTROLLED TYPE	
TIME TO TRAVERSE TEMPERATURE RANGE (MINUTES)	2338
TERMINAL STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1418
NO EVIDENCE OF PHYSICAL DAMAGE.	1433
REMAIN WITHIN SPECIFIED TOLERANCE.	6296
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1410
PER MIL-STD-202, METHOD 211.	1375

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2330	THE MEASUREMENTS SHALL BE TAKEN AT SPECIFIED TEMPERATURE INTERVALS.
2334	THE TEMPERATURE INTERVALS SHALL BE 2334 DEGREES CELSIUS.
2336	THE RATE OF TEMPERATURE CHANGE SHALL BE NOT GREATER THAN 2336 DEGREES CELSIUS PER SECOND.
2338	THE TIME REQUIRED TO TRAVERSE THE OPERATING TEMPERATURE RANGE SHALL BE 2338 MINUTE(S).
1418	TERMINAL STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1418.
1433	TERMINAL STRENGTH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6296	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1410	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1410.
1375	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 211 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINAL STRENGTH (CONT)	
PER MIL-STD-202, METHOD 211. (CONT)	
*TEST CONDITIONS	
TEST CONDITION A, APPLIED FORCE (SELECT ONE)	
(POUNDS)	1411
(NEWTONS)	1419
TEST CONDITION B, BENDS (NUMBER)	1412
TEST CONDITION C, LOAD (SELECT ONE)	
(POUNDS)	1413
(KILOGRAMS)	1420
THERMAL SHOCK (TEMPERATURE CYCLING)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4722
AS FOLLOWS:	2830
NO EVIDENCE OF PHYSICAL DAMAGE.	2832
MEASUREMENTS BEFORE AND AFTER TEST.	2834
REMAIN WITHIN SPECIFIED TOLERANCE.	4726

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1411	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1411 POUND(S).
1419	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1419 NEWTON(S).
1412	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION B. THERE SHALL BE 1412 BEND(S).
1413	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1413 POUND(S).
1420	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1420 KILOGRAM(S).
4722	THERMAL SHOCK (TEMPERATURE CYCLING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4722.
2830	THERMAL SHOCK (TEMPERATURE CYCLING). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2832	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2834	FREQUENCY AND EQUIVALENT RESISTANCE MEASUREMENTS SHALL BE MADE IMMEDIATELY BEFORE AND AFTER THE TEST.
4726	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THERMAL SHOCK (TEMPERATURE CYCLING) (CONT)	
AS FOLLOWS: (CONT)	
FREQUENCY CHANGE PERMITTED (PARTS PER MILLION)	2836
EQUIVALENT RESISTANCE CHANGE PERMITTED (PERCENT)	2838
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4713
PER MIL-STD-202, METHOD 107.	4714
*TEST CONDITION (LETTER)	4715
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4719
PER MIL-C-3098.	2904
IMMERSION TIME IN BOILING WATER (SECONDS)	2908
IMMERSION TIME IN ICE WATER (SECONDS)	2912
UNWANTED MODES	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2400
NO UNWANTED MODES.	2404
RESISTANCE TWICE MAIN MODE.	2408

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2836	THE FREQUENCY CHANGE PERMITTED SHALL BE 2836 PARTS PER MILLION.
2838	THE EQUIVALENT RESISTANCE CHANGE PERMITTED SHALL BE 2838 PERCENT.
4713	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4713.
4714	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 107 OF MIL-STD-202.
4715	TEST CONDITION LETTER 4715 SHALL APPLY.
4719	MOUNTING SHALL BE IN ACCORDANCE WITH 4719.
2904	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-3098.
2908	THE COMPONENT SHALL BE IMMERSED IN BOILING WATER FOR 2908 SECOND(S).
2912	THE COMPONENT SHALL BE IMMERSED IN ICE WATER FOR 2912 SECOND(S).
2400	UNWANTED MODES. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2400.
2404	UNWANTED MODES. THERE SHALL BE NO UNWANTED MODES OF OSCILLATION (RESONANT FREQUENCIES OTHER THAN DESIRED OPERATING FREQUENCY).
2408	UNWANTED MODES. THE UNWANTED MODE SHALL HAVE A RESISTANCE THAT EXCEEDS TWICE THE MAIN MODE RESISTANCE, BUT NOT LESS THAN SPECIFIED MAIN MODE RESISTANCE.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
UNWANTED MODES (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2412
PER MIL-C-3098, METHOD I, FUNDAMENTAL UNITS.	2416
PER MIL-C-3098, METHOD II, OVERTONE UNITS.	2420
VIBRATION, HIGH FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1455
AS FOLLOWS:	3000
NO EVIDENCE OF PHYSICAL DAMAGE.	3002
MAXIMUM FREQUENCY CHANGE (PERCENT)	3004
FREQUENCY CHANGE PERMITTED (PARTS PER MILLION)	3008
REMAIN WITHIN SPECIFIED TOLERANCE.	1469
MAXIMUM CHANGE IN RESISTANCE (PERCENT)	3006
EQUIVALENT RESISTANCE CHANGE PERMITTED (PERCENT)	3010
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1446

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2412	UNWANTED MODES. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2412.
2416	UNWANTED MODES. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD I OF MIL-C-3098.
2420	UNWANTED MODES. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD II OF MIL-C-3098.
1455	VIBRATION, HIGH FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1455.
3000	VIBRATION, HIGH FREQUENCY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3002	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
3004	THE FREQUENCY CHANGE SHALL BE NOT GREATER THAN 3004 PERCENT.
3008	THE FREQUENCY CHANGE PERMITTED SHALL BE 3008 PARTS PER MILLION.
1469	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
3006	THE CHANGE IN THE EQUIVALENT RESISTANCE SHALL BE NOT GREATER THAN 3006 PERCENT.
3010	THE EQUIVALENT RESISTANCE CHANGE PERMITTED SHALL BE 3010 PERCENT.
1446	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1446.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, HIGH FREQUENCY (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 204.	1447
*TEST CONDITION (LETTER)	1448
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOJNTING METHOD.	4709
NORMAL MOUNTING METHOD.	4708
MOUNT PER DOCUMENT (DOC DES)	4707
METHOD OF DETERMINING MECHANICAL RESONANCE (SELECT ONE)	
VISUALLY BY MEANS OF A STROBOTAC.	1533
ELECTRICAL OUTPUT INDICATORS.	1534
VIBRATION, LOW FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1475
AS FOLLOWS:	3100
NO EVIDENCE OF PHYSICAL DAMAGE.	3102
REMAIN WITHIN SPECIFIED TOLERANCE.	1480
MAXIMUM FREQUENCY CHANGE (PERCENT)	3104
FREQUENCY CHANGE PERMITTED (PARTS PER MILLION)	3108

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1447	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 204 OF MIL-STD-202.
1448	TEST CONDITION LETTER 1448 SHALL APPLY.
4709	MOUNTING SHALL BE ANY SUITABLE METHOD.
4708	MOUNTING SHALL BE BY THE NORMAL METHOD.
4707	MOUNTING SHALL BE IN ACCORDANCE WITH 4707.
1533	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE VISUALLY BY MEANS OF A STROBOTAC.
1534	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE BY ELECTRICAL OUTPUT INDICATORS.
1475	VIBRATION, LOW FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1475.
3100	VIBRATION, LOW FREQUENCY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3102	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1480	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
3104	THE FREQUENCY CHANGE SHALL BE NOT GREATER THAN 3104 PERCENT.
3108	THE FREQUENCY CHANGE PERMITTED SHALL BE 3108 PARTS PER MILLION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM CHANGE IN RESISTANCE (PERCENT)	3106
EQUIVALENT RESISTANCE CHANGE PERMITTED (PERCENT)	3110
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1466
PER MIL-STD-202, METHOD 201.	1467
DURATION OF VIBRATION PER AXIS (HOURS)	1470
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4731
NORMAL MOUNTING METHOD.	4730
MOUNT PER DOCUMENT (DOC DES)	4729
DIRECTION OF MOTION	
PARALLEL TO LONGITUDINAL AXIS.	1535
PERPENDICULAR TO LONGITUDINAL AXIS.	1536
ON THE CENTERLINE OF MOST SENSITIVE AXIS.	4979
90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.	4978
THREE MUTUALLY PERPENDICULAR DIRECTIONS.	1537

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3106	THE CHANGE IN THE EQUIVALENT RESISTANCE SHALL BE NOT GREATER THAN 3106 PERCENT.
3110	THE EQUIVALENT RESISTANCE CHANGE PERMITTED SHALL BE 3110 PERCENT.
1466	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1466.
1467	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 201 OF MIL-STD-202.
1470	DURATION OF TEST SHALL BE 1470 HOUR(S) PER AXIS.
4731	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4730	MOUNTING SHALL BE BY THE NORMAL METHOD.
4729	MOUNTING SHALL BE IN ACCORDANCE WITH 4729.
1535	THE DIRECTION OF MOTION SHALL BE PARALLEL TO THE LONGITUDINAL AXIS.
1536	THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE LONGITUDINAL AXIS.
4979	THE DIRECTION OF MOTION SHALL BE ON THE CENTERLINE OF THE MOST SENSITIVE AXIS.
4978	THE DIRECTION OF MOTION SHALL BE 90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.
1537	THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUALLY PERPENDICULAR DIRECTIONS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1435
AS FOLLOWS:	3120
NO EVIDENCE OF PHYSICAL DAMAGE.	3122
REMAIN WITHIN SPECIFIED TOLERANCE.	1538
DISCONTINUITY DURING TEST (SELECT ONE)	
NO DISCONTINUITY.	1374
MAXIMUM (MILLISECONDS)	1545
MAXIMUM (MICROSECONDS)	1546
FREQUENCY CHANGE PERMITTED (PARTS PER MILLION)	3124
EQUIVALENT RESISTANCE CHANGE PERMITTED (PERCENT)	3126
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1426
PER MIL-STD-202, METHOD 214.	1427
*TEST CONDITION (ROMAN NUMERAL AND LETTER)	1428

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1435	VIBRATION, RANDOM. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1435.
3120	VIBRATION, RANDOM. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3122	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1538	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1374	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1545	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1545 MILLISECOND(S).
1546	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1546 MICROSECOND(S).
3124	THE FREQUENCY CHANGE PERMITTED SHALL BE 3124 PARTS PER MILLION.
3126	THE EQUIVALENT RESISTANCE CHANGE PERMITTED SHALL BE 3126 PERCENT.
1426	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1426.
1427	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 214 OF MIL-STD-202.
1428	TEST CONDITION NUMBER AND LETTER 1428 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
PER MIL-STD-202, METHOD 214. (CONT)	
*DURATION OF APPLICATION (SELECT ONE)	
(MINUTES)	1438
(HOURS)	1431
MONITORING INSTRUMENTATION OF EXCITATION (SELECT ONE)	
ANY SUITABLE SYSTEM.	1452
CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.	1453
CALIBRATED OSCILLOSCOPE.	1459
NUMBER OF VIBRATION MONITORING TEST POINTS (QUANTITY)	1430
LOCATION OF MONITORING POINTS (SELECT ONE)	
ANY SUITABLE LOCATION.	1439
AS CLOSE AS PRACTICAL TO TEST SPECIMEN.	1462

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1438	THE DURATION OF THE TEST SHALL BE 1438 MINUTE(S).
1431	THE DURATION OF THE TEST SHALL BE 1431 HOUR(S).
1452	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE ANY SUITABLE INSTRUMENTATION SYSTEM.
1453	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.
1459	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED OSCILLOSCOPE.
1430	THERE SHALL BE 1430 VIBRATION MONITORING POINT(S).
1439	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE ANY SUITABLE LOCATION.
1462	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE AS CLOSE AS PRACTICAL TO THE TEST SPECIMEN(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
PER MIL-STD-202, METHOD 214. (CONT)	
MONITOR CONTACT CHATTER IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202.	
*TEST CIRCUIT (LETTER)	1402
*TEST CONDITION (LETTER)	1382
PERCENT OF RATED LOAD APPLIED (PERCENT)	4678
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4977
NORMAL MOUNTING METHOD.	4976
MOUNT PER DOCUMENT (DOC DES)	4975

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1402	MONITORING DURING THE TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1402 SHALL APPLY.
1382	TEST CONDITION LETTER 1382 IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202 SHALL APPLY.
4678	THE LOAD SHALL BE 4678 PERCENT OF THE RATED LOAD.
4977	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4976	MOUNTING SHALL BE BY THE NORMAL METHOD.
4975	MOUNTING SHALL BE IN ACCORDANCE WITH 4975.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STORAGE CONDITIONS	
(YEARS)	1529
CERTIFY MAXIMUM CURE DATE TO DELIVERY (QUARTERS)	4942
CERTIFY MINIMUM SHELF LIFE AFTER DELIVERY (QUARTERS)	4943
CERTIFY MAXIMUM MANUFACTURE DATE TO DELIVERY (QUARTERS)	4944
AGE LIMITATION PER MIL-STD-1523.	5209
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	STORAGE CONDITIONS.
1529	ITEMS SHALL WITHSTAND 1529 YEARS OF STORAGE WHEN PROPERLY PRESERVED, PACKAGED AND MECHANICALLY PROTECTED WITHOUT REQUIRING MAJOR REPAIR.
4942	MANUFACTURER SHALL CERTIFY THAT THE CURE DATE SHALL BE NOT GREATER THAN 4942 QUARTERS PRIOR TO DELIVERY DATE.
4943	MANUFACTURER SHALL CERTIFY THAT THERE SHALL BE NOT LESS THAN 4943 QUARTERS OF SHELF LIFE AFTER DELIVERY.
4944	MANUFACTURER SHALL CERTIFY THAT THE DATE OF MANUFACTURE SHALL BE NOT GREATER THAN 4944 QUARTERS PRIOR TO DATE OF DELIVERY.
5209	AGE LIMITATIONS OF THE FINISHED PRODUCT SHALL BE IN ACCORDANCE WITH MIL-STD-1523.
	MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995
DEFINITION OF HERMETIC SEALING	
NOTE: AUTOMATIC WHEN CODES 1564 OR 1562 ARE USED TO REQUIRE HERMETIC SEALING.	
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.
	DEFINITION OF HERMETIC SEALING. FOR THE PURPOSE OF THIS DOCUMENT, A HERMETICALLY-SEALED ITEM IS ONE IN WHICH THE ELEMENT IS CONTAINED WITHIN A SEALED ENCLOSURE OF CERAMIC, GLASS OR METAL, OR A COMBINATION THEREOF, WHERE SEALING IS ACCOMPLISHED BY MATERIAL FUSION, WELDING, BRAZING OR SOLDERING.

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User acitivty:
Army-MU

Preparing activity:
Army-MI


(Project EDS-A266)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.


APPENDIX A

ILLUSTRATIONS


Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

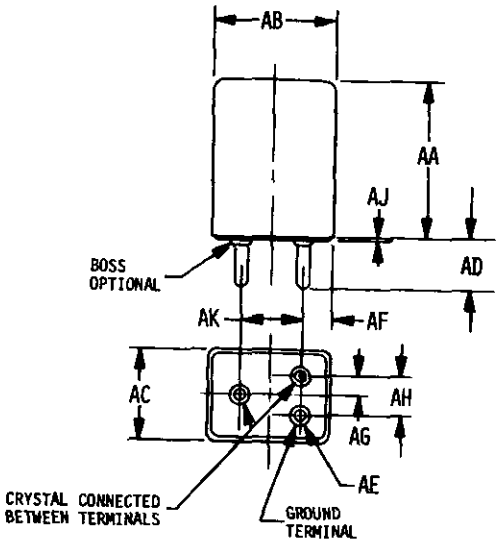


064-01-1

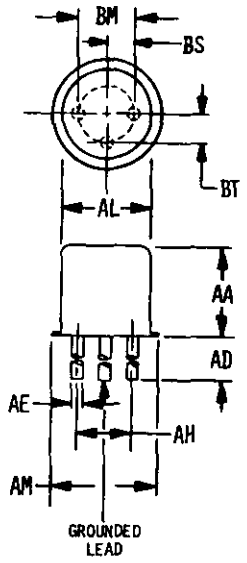

064-01-2

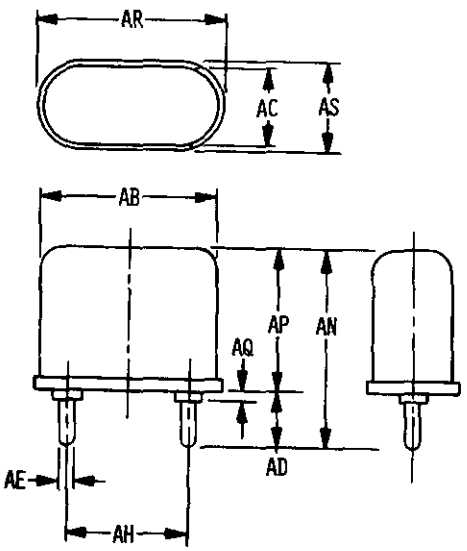


064-01-3

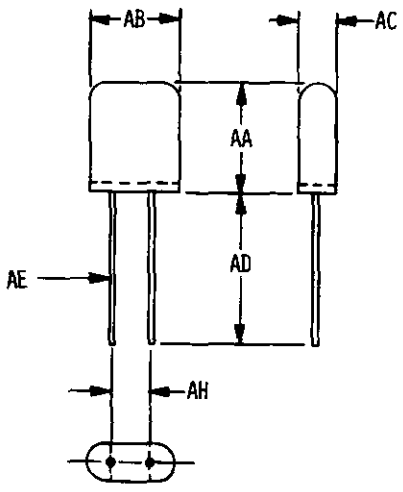


064-01-4


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

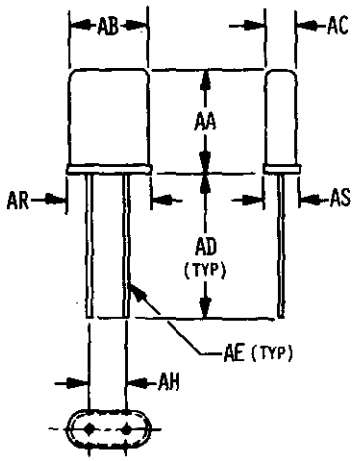


064-01-5

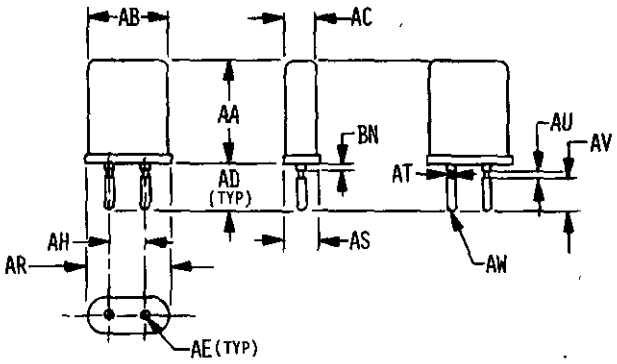

064-01-6

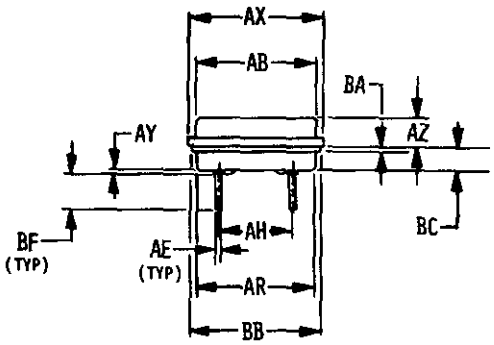


064-01-7

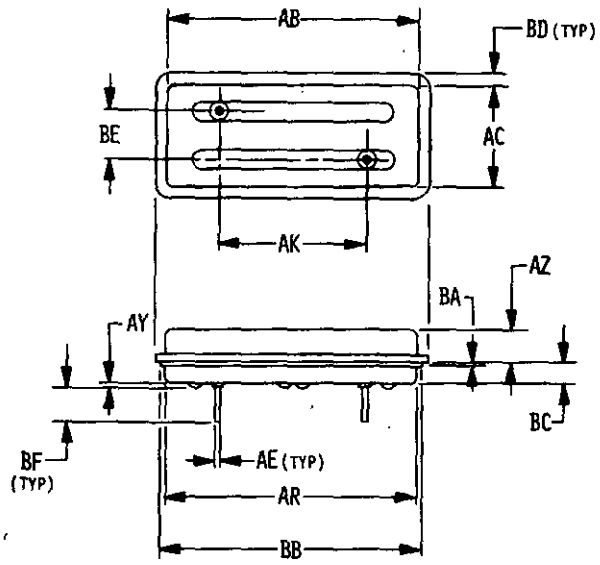


064-01-8


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

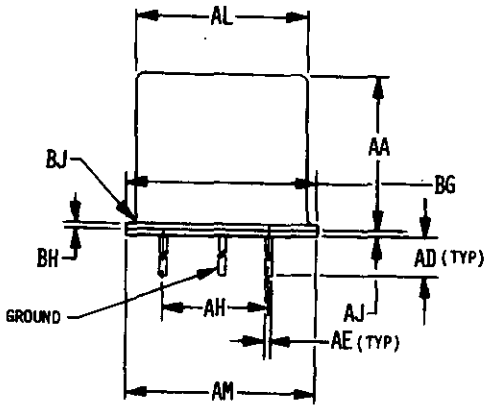


864-01-9

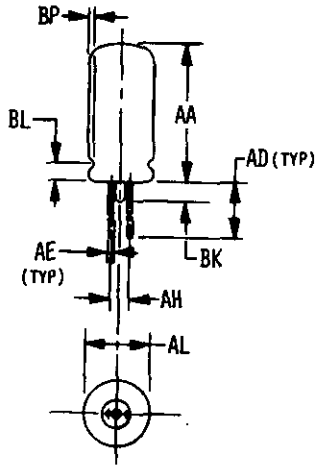

864-01-10

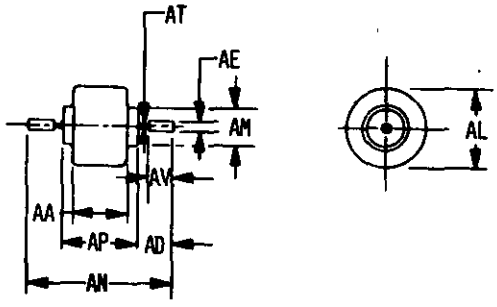


864-01-11

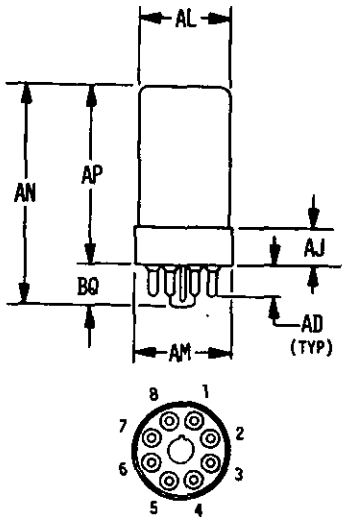


864-01-12


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

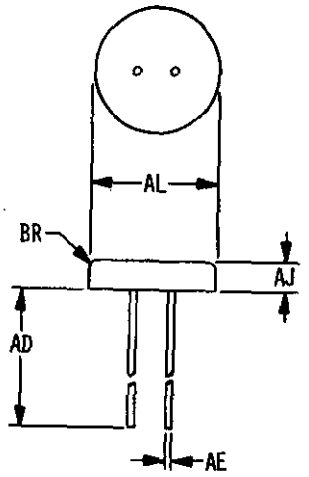

064-01-13

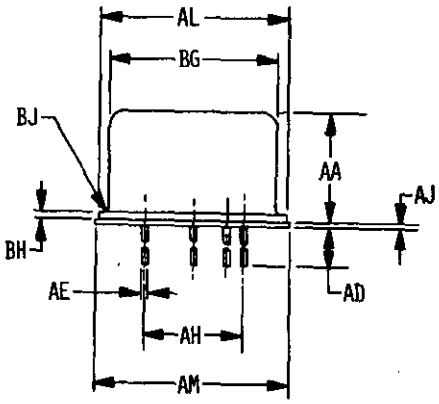


064-01-14

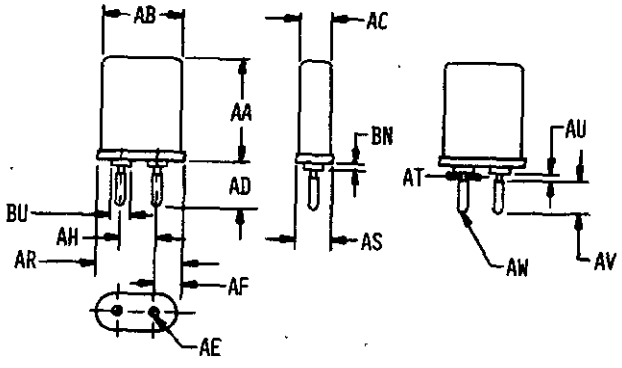


064-01-15

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

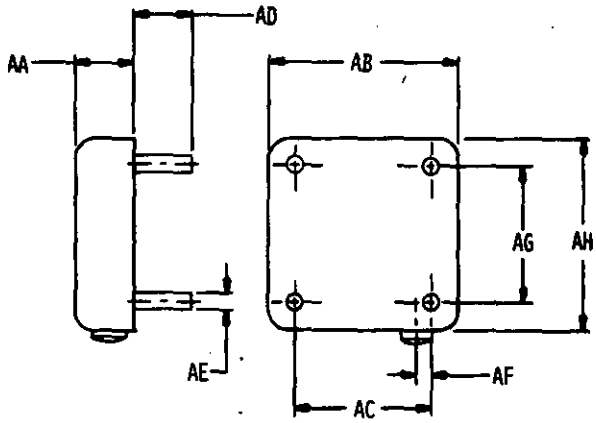

864-01-16

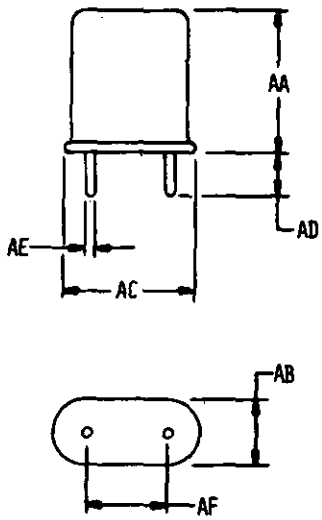

864-01-17

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	12	1412	82	1529	98	1704	26
0102	12	1413	82	1533	88	1708	26
0103	12	1418	80	1534	88	1710	26
0104	12	1419	82	1535	90	1712	26
0105	12	1420	82	1536	90	1716	26
0107	14	1426	92	1537	90	1720	28
0108	14	1427	92	1538	92	1724	28
0700	12	1428	92	1545	92	1728	28
0800	12	1430	94	1546	92	1732	28
1003	12	1431	94	1557	30	1736	28
1004	12	1433	80	1558	30	1740	28
1005	12	1435	92	1562	24	1752	32
1006	12	1438	94	1564	24	1756	32
1008	12	1439	94	1566	24	1760	32
1009	20	1446	86	1568	24	1762	32
1371	52	1447	88	1570	24	1764	32
1372	56	1448	88	1590	16	1768	32
1373	54	1449	60	1600	24	1772	32
1374	92	1452	94	1602	24	1776	32
1375	80	1453	94	1604	24	1780	32
1376	54	1455	86	1608	24	1784	32
1377	54	1459	94	1626	16	1788	32
1378	54	1462	94	1627	16	1792	32
1380	52	1466	90	1628	16	1796	32
1381	56	1467	90	1629	16	1800	34
1382	96	1469	86	1630	16	1804	34
1383	56	1478	90	1631	16	1808	34
1384	52	1475	88	1632	16	1812	34
1386	52	1488	88	1634	16	1816	34
1387	52	1497	54	1636	16	1820	34
1388	52	1498	54	1642	18	1824	34
1391	58	1500	74	1652	18	1828	34
1397	60	1502	74	1654	18	1832	34
1398	58	1504	74	1658	18	1836	34
1400	58	1508	74	1660	18	1910	36
1402	96	1511	54	1662	18	1914	36
1406	58	1520	56	1664	18	1918	36
1407	52	1522	54	1670	18	1920	36
1410	80	1523	54	1672	18	1922	36
1411	82	1524	54	1700	26	1926	36

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1930	36	2310	78	2750	74	4678	96
1934	36	2311	78	2752	74	4683	76
1938	36	2312	78	2754	74	4685	74
1942	36	2313	78	2756	74	4686	74
1946	36	2314	78	2758	74	4689	66
2004	46	2318	78	2830	82	4691	66
2008	46	2322	78	2832	82	4692	66
2012	46	2326	78	2834	82	4694	66
2016	46	2334	80	2836	84	4695	66
2018	48	2336	80	2838	84	4698	66
2022	48	2338	80	2904	84	4700	66
2026	48	2400	84	2908	84	4701	66
2030	48	2404	84	2912	84	4703	74
2034	48	2408	84	3000	86	4707	88
2038	48	2412	86	3002	86	4708	88
2042	48	2416	86	3004	86	4709	88
2046	48	2420	86	3006	86	4713	84
2050	48	2502	28	3008	86	4714	84
2054	50	2506	28	3010	86	4715	84
2100	56	2520	58	3100	88	4717	46
2104	56	2522	58	3102	88	4718	66
2108	56	2524	58	3104	88	4719	84
2112	56	2526	58	3106	90	4722	82
2116	56	2550	60	3108	88	4726	82
2120	56	2600	68	3110	90	4729	90
2121	56	2602	68	3122	92	4730	90
2122	56	2603	68	3124	92	4731	90
2124	58	2604	68	3126	92	4732	70
2128	58	2605	68	4662	76	4734	70
2150	64	2606	68	4663	76	4735	72
2152	64	2702	70	4664	76	4741	70
2154	64	2704	70	4665	76	4745	70
2156	64	2706	70	4666	76	4750	70
2200	64	2708	70	4667	76	4751	72
2204	64	2710	72	4669	66	4752	72
2208	64	2714	72	4671	66	4765	68
2212	64	2718	72	4672	76	4766	68
2216	66	2722	72	4674	74	4770	68
2302	78	2726	72	4675	76	4771	68
2306	78	2730	72	4677	76	4772	68

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4773	68	4891	40	6272	28	6996	26
4809	50	4892	30	6273	28	6997	26
4810	50	4894	38	6277	28	6998	26
4811	50	4897	46	6280	40	6999	26
4812	50	4900	40	6282	62	7001	98
4814	50	4901	38	6283	62	7002	98
4819	50	4902	42	6284	62	7003	98
4820	50	4906	38	6285	62	7004	98
4822	50	4908	38	6286	62	7005	98
4825	50	4942	98	6287	62	7021	24
4842	44	4943	98	6288	62	7022	24
4843	62	4944	98	6289	62	7023	24
4844	44	4950	22	6291	60	7024	24
4845	44	4963	64	6293	40	7301	20
4846	44	4967	64	6294	40	7302	20
4847	42	4972	64	6296	80	7572	20
4848	44	4975	96	6300	38	7576	20
4849	38	4976	96	6308	40	7577	20
4850	44	4977	96	6310	42	7580	22
4854	44	4978	90	6311	40	7627	16
4855	44	4979	90	6312	40	7628	16
4856	42	4984	60	6323	70	7629	100
4857	60	4986	60	6328	70	7630	100
4858	60	4989	66	6329	72	7641	16
4859	40	5000	46	6330	72		
4861	42	5052	20	6359	52		
4862	44	5054	18	6369	12		
4863	30	5068	20	6370	70		
4864	30	5069	18	6371	60		
4865	30	5209	98	6372	100		
4867	44	5297	62	6870	98		
4868	30	6205	76	6873	12		
4869	46	6226	30	6874	14		
4870	46	6233	30	6941	14		
4874	42	6250	30	6942	14		
4875	42	6251	30	6991	100		
4878	68	6263	30	6992	100		
4884	38	6264	30	6993	100		
4885	38	6265	30	6994	100		
4886	38	6267	46	6995	100		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Accelerated Aging	26
Acceleration	28
Additional Part Marking	100
Additional Requirements	98
Aging	32
Aperture Cards Required	14
Applicable Documents	100
Base Document	12
Bond Strength	34
Capacitance, Shunt	36
City, State, Zip	12
Classification	16
Company Name/Command	12
Configuration	20
Contract Number/Office Symbol	12
Control, Source	12
Control, Specification	14
Crystal Element Cut	24
Crystal Mounting	24
Date	12
Definition of Hermetic Sealing	100
Design and Construction	24
Dielectric Withstanding Voltage at Reduced Barometric Pressure	38
Dielectric Withstanding Voltage at Sea Level	42
Drive Level Rating	16
Figure of Merit Rating	16
Finishes	22
Format	12
Frequency and Equivalent Resistance	46
Frequency Range	24
Frequency Rating	16
Frequency Stability Rating	16
Frequency Tolerance Rating	16
Government Design Activity FSCM	12
Holder	24
Illustrations	22
Immersion	50
Insulation Resistance	52

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Low Temperature Storage	56
Materials	22
Metals	22
Mode of Oscillation Rating	16
Moisture Resistance	58
Mounting Hardware	98
Nomenclature	100
Notes	100
Packaging	100
Part Marking	100
Part Number	14
Part Number Cross-Reference	100
Phone Number	12
Quality Assurance Provisions	100
Radiographic	60
Random Drop	64
Reduced Drive Level	64
Requester FSCM	12
Requester's Name	12
Resistance to Soldering Heat	66
Revision of AEDPS Document (Number)	14
Salt Spray	68
Scope	14
Seal	70
Shock, Specified Pulse	74
Solderability	74
Source Table	14
Storage Conditions	98
Street/Building	12
Superseded Document	100
System Application	12
Tabulated Characteristics	22
Temperature Rating	18
Temperature Run	78
Temperature Type Rating	18
Terminal Strength	80
Thermal Shock (Temperature Cycling)	82
Type of Resonance Rating	18

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

Page

Units of Measure - 14, 20
Unwanted Modes - 84

Vibration, High Frequency- 86
Vibration, Low Frequency - 88
Vibration, Random- 92

Weight - 24
Workmanship- 98

☆U.S. GOVERNMENT PRINTING OFFICE: 1980-603-121/584

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-38A(MI), dated 15 February 1979 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-38A(MI), dated 15 February 1979 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
DOD STD 35-38A

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
U.S. Army Missile R&D Command
ATTN: DRDMI-ESD
Redstone Arsenal, AL 35809

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.