DOD-STD-35-40A(MI)

28 August 1978

SUPERSEDING

MIL-STD-35-40(MI)

1 DECEMBER 1974

MILITARY STANDARD

RETAINING RINGS

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

FSC EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Retaining Rings
Automated Engineering
Document Preparation System

DOD-STD-35-40A(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-40A(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for retaining rings.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	3
	2.1	Issues of documents	3
	2.2	Other publications	4
	3.	DEFINITIONS	5
	4.	GENERAL REQUIREMENTS	7
	4.1	Introduction	7
	4.2	Specification Requirement Sheet (SRS)	7
	4.3	Configuration	7
	4.3.1	Dimensions	7
	4.3.2	Illustrations	7
	4.4	Units of measure	7
	5.	DETAILED REQUIREMENTS	9
	5.1	Introduction	9
	5.2	MSE Formats	9
	5.3	Referenced documents	9
	5.4	Tabulation	9
	5.5	Keyword Code Index (KCI) and Standard Paragraphs	11
	5.5.1	Interrelationship of Codes	11
	5.5.2	Automatic MSE Data	11
	5.5.3	DOD-STD-35 Tables	11

TABLES

Table	I.	Title Index	2
	II.	Tabulation candidates	9

APPENDICES

Appendix	A.	Illustrations	51
	B.	Characteristic Code Index	71
		Index	75

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for retaining rings.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid reduncancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
RINGS, RETAINING, REDUCED SECTION	161001	MIL-R-21248	REDUCED SECTION
		MS3215	EXT, "E", REINF
		MS3216	EXT, PRONG-LOCK
		MS16632	EXT, CRESCENT
		MS16633	EXT, "E"
		MS16634	EXT, BOWED "E"
RINGS, RETAINING, TAPERED SECTION	161002	MIL-R-21248	TAPERED SECTION
		MS3217	EXT, HEAVY DUTY
		MS16624	EXT, BASIC
		MS16625	INT, BASIC
		MS16626	EXT, INVERTED
		MS16627	INT, INVERTED
		MS16628	EXT, BOWED
		MS16629	INT, BOWED
		MS16630	EXT, BEVELED
		MS16631	INT, BEVELED
		MS90707	EXT GRIP
		MS90708	EXT INTLK
RINGS, RETAINING, SPIRAL	161003	MIL-R-27426	SPIRAL RTNG RINGS
RINGS, RETAINING	161004	MIL-R-21248	REDUCED AND TAPERED SECTION
		MIL-R-27426	SPIRAL
		MS3211	SNAP RTNG RING
		MS5009	SNAP RTNG RING
		MS13962	PISTON PIN RTNG
		MS25086	LOCK RTNG RING
		MS51990	LOCK, SERRATED
		MS51997	LOCK, SERRATED, HIGH STRENGTH
		MS90255	CONN RTNG RING
RING, RETAINING, SCREW	161005	MIL-R-48211	EXTERNAL THREAD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issues in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

FEDERAL

QQ-P-416	Plating, Cadmium (Electrodeposited)
QQ-Z-325	Zinc Coating, Electrodeposited, Requirements For
GGG-P-480	Pliers, Retaining Ring

MILITARY

MIL-P-16232	Phosphate Coatings, Heavy, Manganese or Zinc Base (For Ferrous Metals)
MIL-R-21248	Rings, Retaining (Tapered and Reduced Section Type)
MIL-R-27426	Rings, Retaining, Spiral (Uniform Cross Section)
MIL-C-81562	Coatings, Cadmium, Tin-Cadmium and Zinc (Mechanically Deposited)

STANDARDS

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-1312	Fasteners, Test Methods

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTME10	Brinell Hardness of Metallic Materials
ASTME18	Rockewell Hardness and Rockwell Superficial Hardness of Metallic Materials
ASTME380	Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Retaining Rings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for Retaining Rings, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are appliable to Retaining Rings.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Retaining Rings.

4.3.2 Illustrations. Illustrations applicable to Retaining Rings are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table II provides codes for column headings which may be used for retaining rings characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

TABLE II. TABULATION CANDIDATES

CODE 1582	COLUMN HEADING	CODE 1584	COLUMN HEADING	CODE 1604	COLUMN HEADING
	MAXIMUM AXIAL KINK INCH		MAXIMUM AXIAL KINK MILLIMETER		MAXIMUM DISH INCH
1606	MAXIMUM DISH MILLIMETER	1662	MAXIMUM MISALIGN INCH	1664	MAXIMUM MISALIGN MILLIMETER
1682	MAXIMUM PITCH INCH	1684	MAXIMUM PITCH MILLIMETER	1698	MAX RADIAL KINK INCH
1700	MAX RADIAL KINK MILLIMETER				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

5.5 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.5.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.5.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.5.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT.	0700
ONE SECTION DOCUMENT.	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 20261O-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6874	THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).
0107	
0108	0108.
	SCOPE.
	SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.
	PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.
	PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.
6941	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES.
6942	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION	
TYPE (DESIGNATION)	1570
CLASS (DESIGNATION)	1571
RATINGS	
DYNAMIC THRUST LOAD RATING	
RETAINING RING	
MAXIMUM IMPACT (SELECT ONE)	
(POUND-INCHES)	1620
(NEWTON METERS)	1622
MAXIMUM SUDDEN (PERCENT OF STATIC THRUST LOADING)	1624
MAXIMUM VIBRATION (SELECT ONE)	
(POUNDS)	1628
(NEWTONS)	1630

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

CLASSIFICATION.

1570 TYPE. TYPE 1570 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.

1571 CLASS. CLASS 1571 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.

DYNAMIC THRUST LOAD RATING.

1620 THE MAXIMUM DYNAMIC THRUST LOAD IMPACT RATING FOR THE RETAINING RING SHALL BE 1620 POUND-INCH(S).

1622 THE MAXIMUM DYNAMIC THRUST LOAD IMPACT RATING FOR THE RETAINING RING SHALL BE 1622 NEWTON METER(S).

1624 THE MAXIMUM DYNAMIC THRUST LOAD SUDDEN RATING FOR THE RETAINING RING SHALL BE 1624 PERCENT OF THE STATIC THRUST LOADING.

1628 THE MAXIMUM DYNAMIC THRUST LOAD VIBRATION RATING FOR THE RETAINING RING SHALL BE 1628 POUND(S).

1630 THE MAXIMUM DYNAMIC THRUST LOAD VIBRATION RATING FOR THE RETAINING RING SHALL BE 1630 NEWTON(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RATINGS (CONT)	
GROOVE	
MAXIMUM IMPACT (SELECT ONE)	
(POUND-INCHES)	1631
(NEWTON METERS)	1632
MAXIMUM SUDDEN (PERCENT OF STATIC THRUST LOADING)	1633
MAXIMUM VIBRATION (SELECT ONE)	
(POUNDS)	1634
(NEWTONS)	1635
STATIC THRUST LOAD RATING	
RETAINING RING (SELECT ONE)	
(POUNDS)	1730
(NEWTONS)	1732
GROOVE (SELECT ONE)	
(POUNDS)	1734

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1631	THE MAXIMUM DYNAMIC THRUST LOAD IMPACT RATING FOR THE GROOVE SHALL BE 1631 POUND-INCH(S).
1632	THE MAXIMUM DYNAMIC THRUST LOAD IMPACT RATING FOR THE GROOVE SHALL BE 1632 NEWTON METER(S).
1633	THE MAXIMUM DYNAMIC THRUST LOAD SUDDEN RATING FOR THE GROOVE SHALL BE 1633 PERCENT OF THE STATIC THRUST LOADING.
1634	THE MAXIMUM DYNAMIC THRUST LOAD VIBRATION RATING FOR THE GROOVE SHALL BE 1634 POUND(S).
1635	THE MAXIMUM DYNAMIC THRUST LOAD VIBRATION RATING FOR THE GROOVE SHALL BE 1635 NEWTON(S).
	STATIC THRUST LOAD RATING.
1730	THE MAXIMUM STATIC THRUST LOAD RATING FOR THE RETAINING RING SHALL BE 1730 POUND(S).
1732	THE MAXIMUM STATIC THRUST LOAD RATING FOR THE RETAINING RING SHALL BE 1732 NEWTON(S).
1734	THE MAXIMUM STATIC THRUST LOAD RATING FOR THE GROOVE SHALL BE 1734 POUND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RATINGS (CONT)	
GROOVE (CONT)	
(NEWTONS)	1735
DEFLECTION RATING	
MAXIMUM DEFLECTION (SELECT ONE)	
(INCH)	1738
(MILLIMETERS)	1739
RELATIVE ROTATIONAL THRUST LOAD RATING	
MAXIMUM LOAD (SELECT ONE)	
(POUNDS)	1747
(NEWTONS)	1748
ROTATIONAL SPEED RATING	
MAXIMUM SPEED (REVOLUTIONS PER MINUTE)	1750
SHEAR STRENGTH RATING	
MINIMUM RETAINING RING SHEAR STRENGTH (SELECT ONE)	
(POUNDS PER SQUARE INCH)	1752

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1735	THE MAXIMUM STATIC THRUST LOAD RATING FOR THE GROOVE SHALL BE 1735 NEWTON(S).
1738	DEFLECTION RATING. THE MAXIMUM DEFLECTION RATING SHALL BE 1738 INCH.
1739	DEFLECTION RATING. THE MAXIMUM DEFLECTION RATING SHALL BE 1739 MILLIMETERS(S).
1747	RELATIVE ROTATIONAL THRUST LOAD RATING. THE MAXIMUM RELATIVE ROTATIONAL THRUST LOAD RATING SHALL BE 1747 POUND(S).
1748	RELATIVE ROTATIONAL THRUST LOAD RATING. THE MAXIMUM RELATIVE ROTATIONAL THRUST LOAD RATING SHALL BE 1748 NEWTON(S).
1750	ROTATIONAL SPEED RATING. THE MAXIMUM ROTATIONAL SPEED RATING FOR THE RETAINING RING SHALL BE 1750 REVOLUTIONS PER MINUTE.
1752	SHEAR STRENGTH RATING. THE MINIMUM RETAINING RING SHEAR STRENGTH RATING SHALL BE 1752 POUNDS PER SQUARE INCH.

Source: https://assist.dla.mil - Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RATINGS (CONT)	
MINIMUM RETAINING RING SHEAR STRENGTH (CONT)	
(MEGAPASCALS)	1753
SPECIAL TOOLS (SELECT ONE)	
NO SPECIAL TOOLS REQUIRED.	1714
SPECIAL TOOLS PER GGG-P-480.	1715
*TYPE (NUMBER)	1716
*CLASS (NUMBER)	1718
*STYLE (LETTER)	1720
CONFIGURATION	
(ILLUSTRATION NUMBERS), SEE APPENDIX A	1009
RETAINING RING STYLE, 161-01 SERIES (NUMBER)	1564
CROSS SECTION STYLE, 161-02 SERIES (NUMBER)	1568
DIMENSION TABLE, (SEE TABLE III, DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1753	SHEAR STRENGTH RATING. THE MINIMUM RETAINING RING SHEAR STRENGTH RATING SHALL BE 1753 MEGAPASCAL(S).
1714	SPECIAL TOOLS. NO SPECIAL TOOL SHALL BE REQUIRED FOR INSERTING AND EXTRACTING THE RETAINING RING.
1715	SPECIAL TOOLS. SPECIAL TOOLS REQUIRED FOR INSERTING AND EXTRACTING THE RETAINING RING SHALL BE IN ACCORDANCE WITH GGG-P-480.
1716	TYPE 1716 SHALL APPLY.
1718	CLASS 1718 SHALL APPLY.
1720	STYLE 1720 SHALL APPLY.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
1564	THE RETAINING RING STYLE SHALL BE IN ACCORDANCE WITH STYLE NUMBER 1564.
1568	THE CROSS SECTION STYLE SHALL BE IN ACCORDANCE WITH STYLE NUMBER 1568.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONFIGURATION (CONT)	
*UNITS (SELECT ONE)	
U.S. (SELECT ONE)	
(INCHES)	7572
(FEET)	7573
(YARDS)	7574
SI (SELECT ONE)	
(CENTIMETERS)	7576
(MILLIMETERS)	7577
(METERS)	7578

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7573	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN FEET OR DEGREES.
7574	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN YARDS OR DEGREES.
7576	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN CENTIMETERS OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
7578	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN METERS OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950
NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.	
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	
MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE IX IS USED.	
METALS	
DISSIMILAR METALS.	7580

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.
	MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
	FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
7580	METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION	
TEMPERATURE	
MAXIMUM OPERATING (DEGREES CELSIUS)	6794
MAXIMUM SERVICE (DEGREES CELSIUS)	6797
MINIMUM OPERATING (DEGREES CELSIUS)	6799
MINIMUM SERVICE (DEGREES CELSIUS)	6802
TYPE (SELECT ONE)	
FLAT.	1756
BOWED.	1758
BEVELED EDGE.	1760
WEIGHT	
MAXIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S.	
(OUNCES)	7022
SI	
(GRAMS)	7021

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	DESIGN AND CONSTRUCTION.
6794	MAXIMUM OPERATING TEMPERATURE. THE OPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6794 DEGREES CELSIUS.
6797	MAXIMUM SERVICE TEMPERATURE. THE SERVICE TEMPERATURE SHALL BE NOT GREATER THAN 6797 DEGREES CELSIUS.
6799	MINIMUM OPERATING TEMPERATURE. THE OPERATING TEMPERATURE SHALL BE NOT LESS THAN 6799 DEGREES CELSIUS.
6802	MINIMUM SERVICE TEMPERATURE. THE SERVICE TEMPERATURE SHALL BE NOT LESS THAN 6802 DEGREES CELSIUS.
1756	TYPE. THE RETAINING RING SHALL BE A FLAT TYPE.
1758	TYPE. THE RETAINING RING SHALL BE A BOWED TYPE.
1760	TYPE. THE RETAINING RING SHALL BE A BEVELED EDGE TYPE.
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7021	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
WEIGHT (CONT)	
NOMINAL WEIGHT PER 100 (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7035
(POUNDS)	7036
SI (SELECT ONE)	
(GRAMS)	7037
(KILOGRAMS)	7038
AXIAL KINK	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1581
MAXIMUM AXIAL KINK (INCH)	1582
MAXIMUM AXIAL KINK (MILLIMETERS)	1584
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1579
PER MIL-R-21248.	1580

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7035	NOMINAL WEIGHT PER 100. THE WEIGHT PER 100 UNITS SHALL BE 7035 OUNCE(S).
7036	NOMINAL WEIGHT PER 100. THE WEIGHT PER 100 UNITS SHALL BE 7036 POUND(S).
7037	NOMINAL WEIGHT PER 100. THE WEIGHT PER 100 UNITS SHALL BE 7037 GRAM(S).
7038	NOMINAL WEIGHT PER 100. THE WEIGHT PER 100 UNITS SHALL BE 7038 KILOGRAM(S).
1581	AXIAL KINK. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1581.
1582	AXIAL KINK. THE AXIAL KINK SHALL BE NOT GREATER THAN 1582 INCH.
1584	AXIAL KINK. THE AXIAL KINK SHALL BE NOT GREATER THAN 1584 MILLIMETER(S).
1579	AXIAL KINK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1579.
1580	AXIAL KINK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-21248.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DISH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1603
MAXIMUM DISH (INCH)	1604
MAXIMUM DISH (MILLIMETERS)	1606
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1599
PER MIL-R-21248.	1600
PER MIL-R-27426.	1602
EMBRITTLEMENT RELIEF	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1828
NO CRACKS OR FAILURE BY FRACTURE.	1830
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1802
PER QQ-P-416.	1804

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1603	DISH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1603.
1604	DISH. THE DISH SHALL BE NOT GREATER THAN 1604 INCH.
1606	DISH. THE DISH SHALL BE NOT GREATER THAN 1606 MILLIMETER(S).
1599	DISH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1599.
1600	DISH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-21248.
1602	DISH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-27426.
1828	EMBRITTLEMENT RELIEF. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1828.
1830	EMBRITTLEMENT RELIEF. THE RETAINING RING SHALL NOT CRACK OR FAIL BY FRACTURE.
1802	EMBRITTLEMENT RELIEF. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1802.
1804	EMBRITTLEMENT RELIEF. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH QQ-P-416.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
EMBRITTLEMENT RELIEF (CONT)	
TEST METHODS (CONT)	
PER QQ-Z-325.	1806
PER MIL-P-16232.	1808
PER MIL-C-81562.	1810
HARDNESS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1862
HARDNESS (NUMBER)	1864
TEST INSTRUMENT (NAME)	1867
SCALE (LETTER)	1868
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1846
PER MIL-STD-1312, TEST 6.	1848
SURFACE PREPARATION BEFORE TEST ____	1849
SURFACE TO BE TESTED ____	1851
PER ASTME10.	1850

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1806	EMBRITTLEMENT RELIEF. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH QQ-Z-325.
1808	EMBRITTLEMENT RELIEF. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-P-16232.
1810	EMBRITTLEMENT RELIEF. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-81562.
1862	HARDNESS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1862.
1864	HARDNESS. THE HARDNESS SHALL BE 1864.
1867	THE TEST INSTRUMENT SHALL BE 1867.
1868	THE 1868 SCALE SHALL APPLY.
1846	HARDNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1846.
1848	HARDNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH TEST 6 OF MIL-STD-1312.
1849	SURFACE PREPARATION BEFORE TEST SHALL BE 1849.
1851	THE SURFACE TO BE TESTED SHALL BE 1851.
1850	HARDNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTME10.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HARDNESS (CONT)	
PER ASTME10. (CONT)	
SURFACE PREPARATION BEFORE TEST ____	1852
SURFACE TO BE TESTED ____	1853
PER ASTME18.	1854
SURFACE PREPARATION BEFORE TEST ____	1855
SURFACE TO BE TESTED ____	1856
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4798
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	4799
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4788
PER MIL-STD-1312, TEST 3.	4881
RELATIVE HUMIDITY (PERCENT)	4789
DURATION OF TEST (HOURS)	4816
MISALIGNMENT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1661

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1852	SURFACE PREPARATION BEFORE TEST SHALL BE 1852.
1853	THE SURFACE TO BE TESTED SHALL BE 1853.
1854	HARDNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTME18.
1855	SURFACE PREPARATION BEFORE TEST SHALL BE 1855.
1856	THE SURFACE TO BE TESTED SHALL BE 1856.
4798	HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.
4799	HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
4788	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.
4881	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH TEST 3 OF MIL-STD-1312.
4789	RELATIVE HUMIDITY SHALL BE 4789 PERCENT.
4816	DURATION OF THE TEST SHALL BE 4816 HOUR(S).
1661	MISALIGNMENT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1661.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MISALIGNMENT (CONT)	
REQUIREMENTS (CONT)	
MAXIMUM MISALIGNMENT (INCH)	1662
MAXIMUM MISALIGNMENT (MILLIMETERS)	1664
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1659.
PER MIL-R-27426.	1660
PERMANENT SET	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1902
AS FOLLOWS:	1903
MAXIMUM PERMANENT SET (PERCENT OF INITIAL FREE DIAMETER)	1904
NO EVIDENCE OF CRACKING.	1906
MINIMUM THREE POINT GROOVE CONTACT.	1910

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1662	MISALIGNMENT. THE MISALIGNMENT SHALL BE NOT GREATER THAN 1662 INCH.
1664	MISALIGNMENT. THE MISALIGNMENT SHALL BE NOT GREATER THAN 1664 MILLIMETER(S).
1659	MISALIGNMENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1659.
1660	MISALIGNMENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-27426.
1902	PERMANENT SET. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1902.
1903	PERMANENT SET. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1904	THE PERMANENT SET SHALL BE NOT GREATER THAN 1904 PERCENT OF THE INITIAL FREE DIAMETER.
1906	THERE SHALL BE NO EVIDENCE OF CRACKING.
1910	THE CONTACT SURFACE BETWEEN THE RETAINING RING AND THE GROOVE IN THE SHAFT SHALL BE NOT LESS THAN A THREE POINT CONTACT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PERMANENT SET (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1882
PER MIL-R-21248.	1884
COMPRESS-RELEASE CYCLES (NUMBER)	1886
TEST SHAFT DIAMETER (SELECT ONE)	
(INCHES)	1888
(MILLIMETERS)	1890
PITCH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1681
MAXIMUM PITCH (INCH)	1682
MAXIMUM PITCH (MILLIMETERS)	1684
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1679
PER MIL-R-21248.	1680

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1882	PERMANENT SET. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1882.
1884	PERMANENT SET. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-21248.
1886	THERE SHALL BE 1886 COMPRESS-RELEASE CYCLE(S) PERFORMED.
1888	THE TEST SHAFT DIAMETER SHALL BE 1888 INCH(S).
1890	THE TEST SHAFT DIAMETER SHALL BE 1890 MILLIMETER(S).
1681	PITCH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1681.
1682	PITCH. THE PITCH SHALL BE NOT GREATER THAN 1682 INCH.
1684	PITCH. THE PITCH SHALL BE NOT GREATER THAN 1684 MILLIMETER(S).
1679	PITCH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1679.
1680	PITCH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-21248.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RADIAL KINK	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1697
MAXIMUM RADIAL KINK (INCH)	1698
MAXIMUM RADIAL KINK (MILLIMETERS)	1700
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1695
PER MIL-R-21248.	1696
SALT SPRAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4878
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE.	4782
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4770
PER MIL-STD-1312, TEST 1.	4768

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1697	RADIAL KINK. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1697.
1698	RADIAL KINK. THE RADIAL KINK SHALL BE NOT GREATER THAN 1698 INCH.
1700	RADIAL KINK. THE RADIAL KINK SHALL BE NOT GREATER THAN 1700 MILLIMETER(S).
1695	RADIAL KINK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1695.
1696	RADIAL KINK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-21248.
4878	SALT SPRAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4878.
4782	SALT SPRAY. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
4770	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4770.
4768	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH TEST 1 OF MIL-STD-1312.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT SPRAY (CONT)	
PER MIL-STD-1312, TEST 1. (CONT)	
DURATION OF TEST (HOURS)	4783
TEST TEMPERATURE (DEGREES CELSIUS)	6367
VIBRATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4681
NO EVIDENCE OF PHYSICAL DAMAGE.	4682
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1505
PER MIL-STD-1312, TEST 7.	1651
DURATION OF TEST (HOURS)	1431
SINUSOIDAL WAVEFORM AT FREQUENCY OF (CYCLES PER MINUTE)	1652
SINUSOIDAL WAVEFORM AMPLITUDE (SELECT ONE)	
(INCHES)	1653
TOLERANCE (INCHES)	1654

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4783	DURATION OF THE TEST SHALL BE 4783 HOUR(S).
6367	TEMPERATURE SHALL BE 6367 DEGREES CELSIUS.
4681	VIBRATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4681.
4682	VIBRATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1505	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1505.
1651	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH TEST 7 OF MIL-STD-1312.
1431	THE DURATION OF THE TEST SHALL BE 1431 HOUR(S).
1652	THE SINUSOIDAL WAVE FORM SHALL BE AT A FREQUENCY OF 1652 CYCLES PER MINUTE.
1653	THE SINUSOIDAL WAVE FORM AMPLITUDE SHALL BE 1653 INCH(S).
1654	THE SINUSOIDAL WAVE FORM AMPLITUDE TOLERANCE SHALL BE 1654 INCH(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION (CONT)	
SINUSOIDAL WAVEFORM AMPLITUDE (CONT)	
(MILLIMETERS)	1655
TOLERANCE (MILLIMETERS)	1656
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-130.	7629

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1655	THE SINUSOIDAL WAVE FORM AMPLITUDE SHALL BE 1655 MILLIMETER(S).
1656	THE SINUSOIDAL WAVE FORM AMPLITUDE TOLERANCE SHALL BE 1656 MILLIMETER(S).
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI

(Project EDS-281)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX A

ILLUSTRATIONS


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

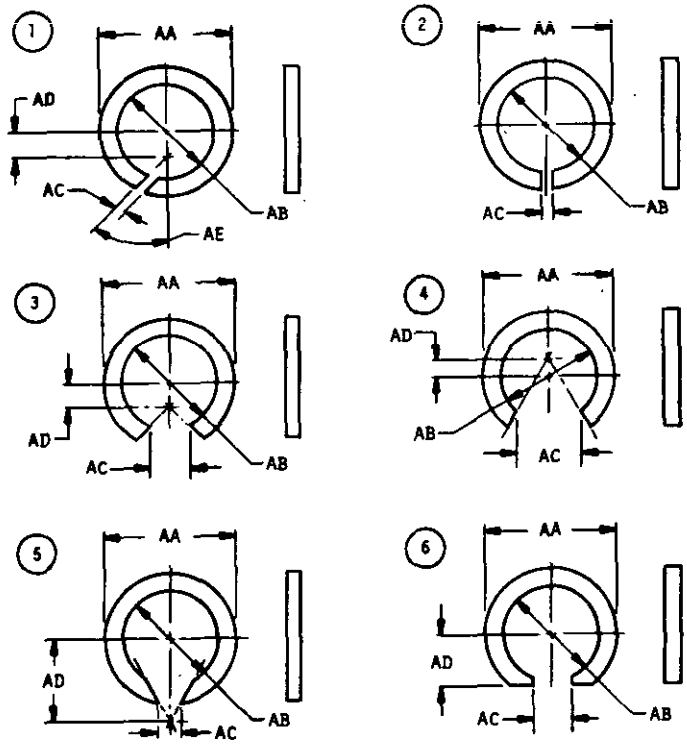


161-01-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

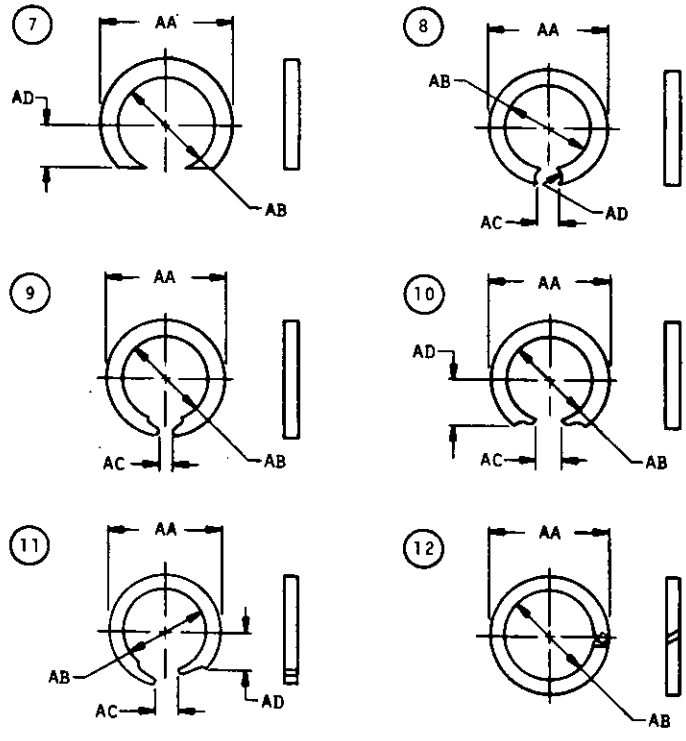


161-01-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

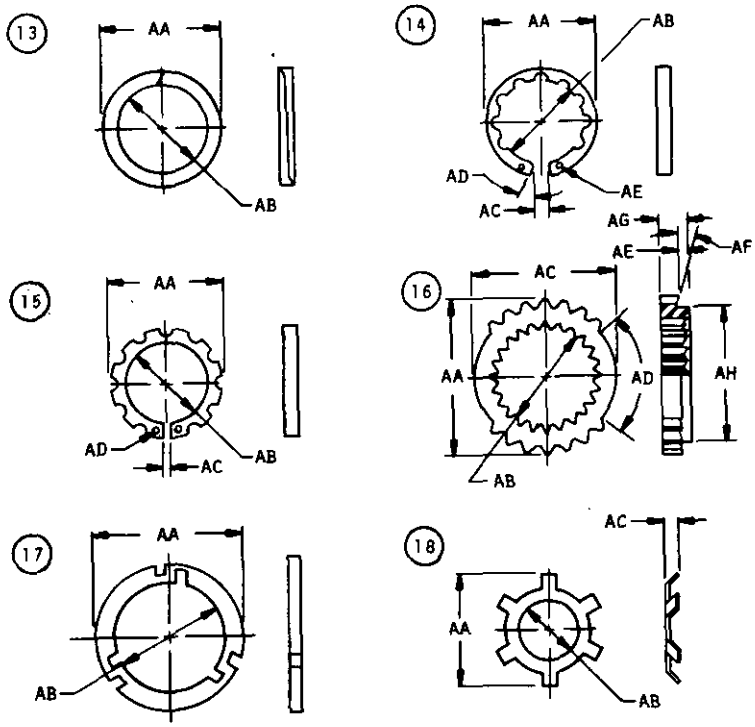


161-01-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

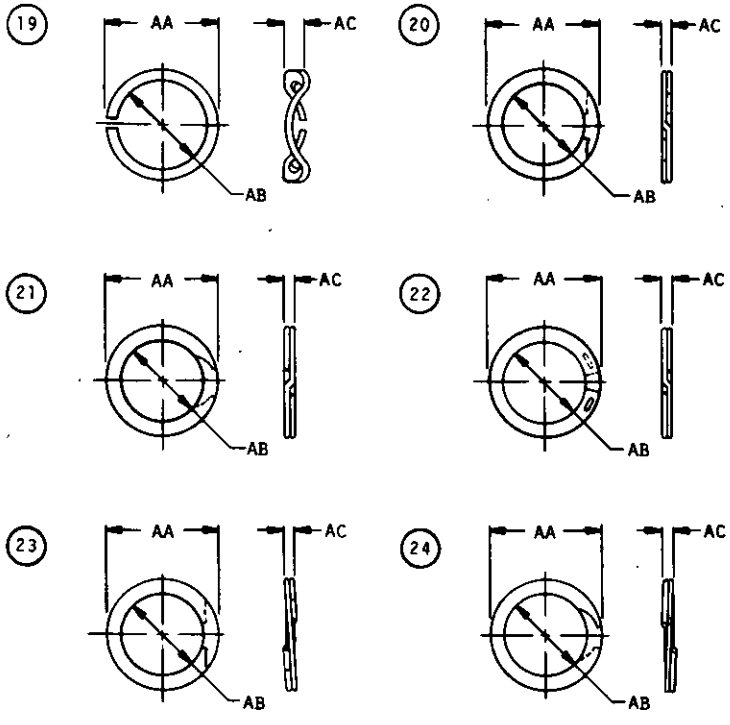


161-01-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

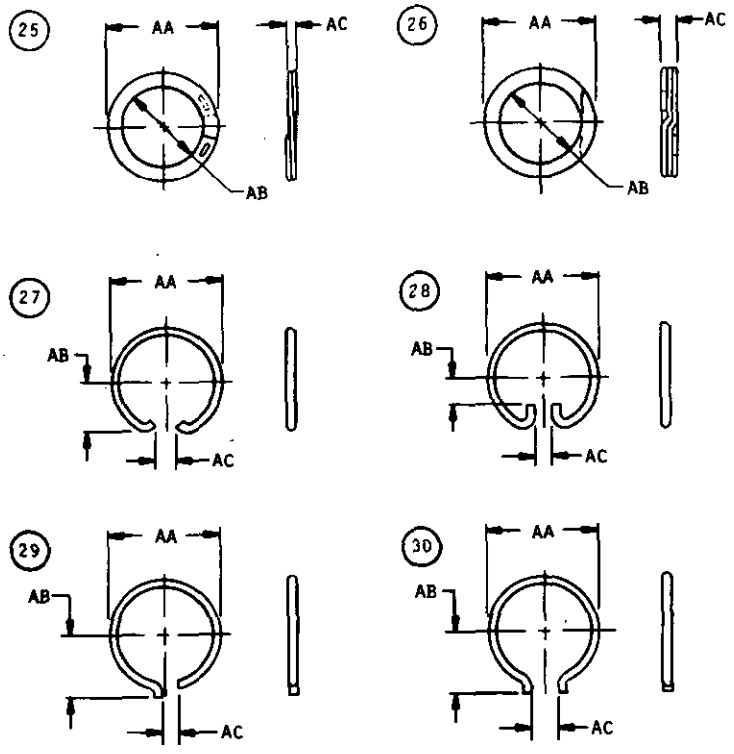


161-01-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

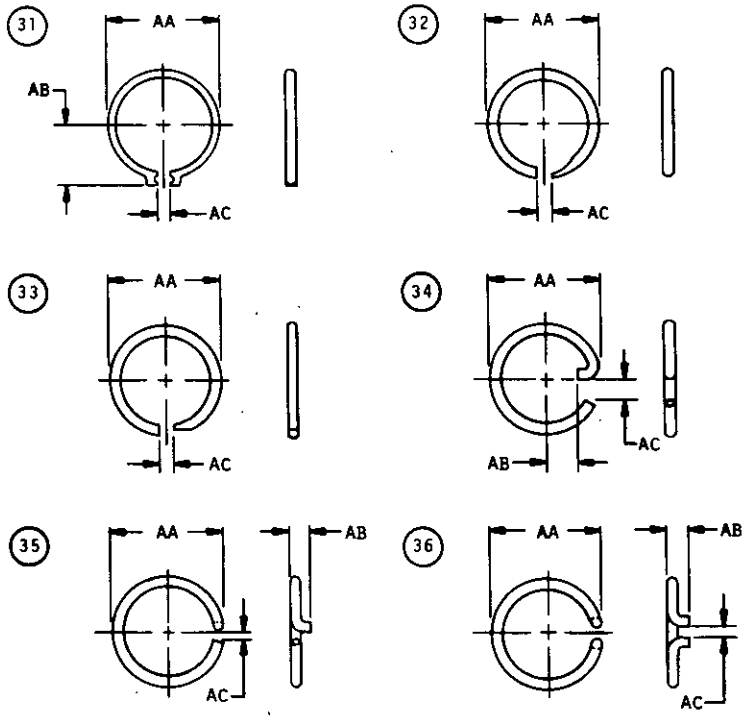


161-01-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

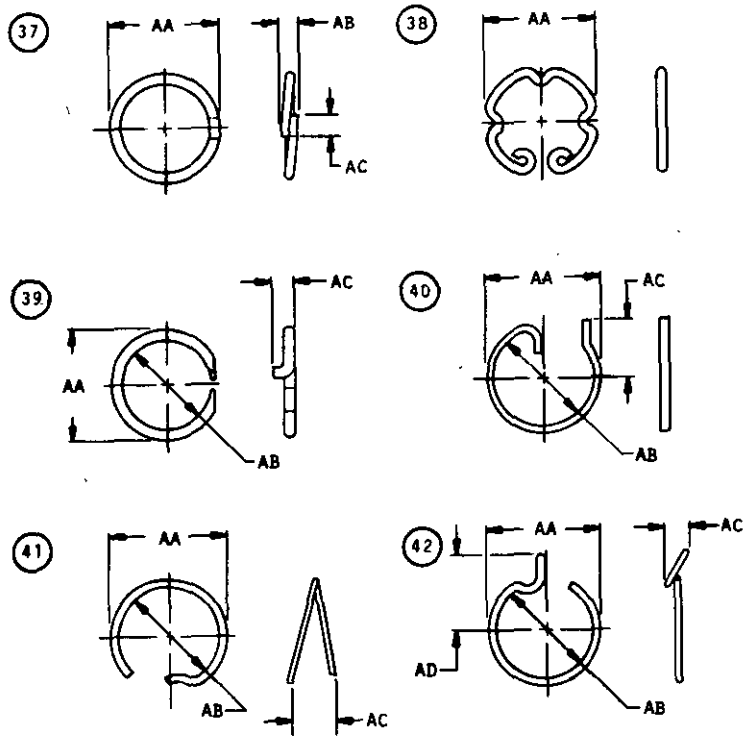


161-01-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

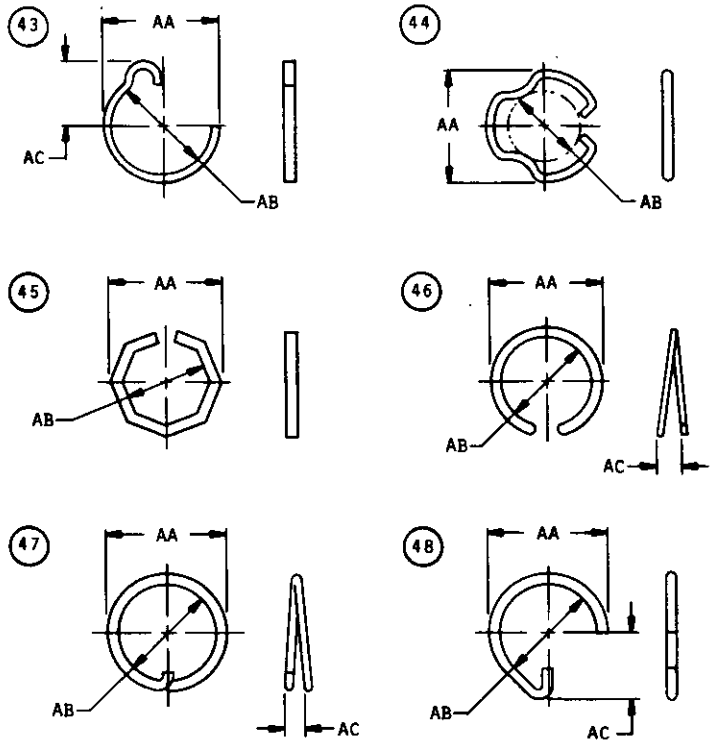


161-01-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

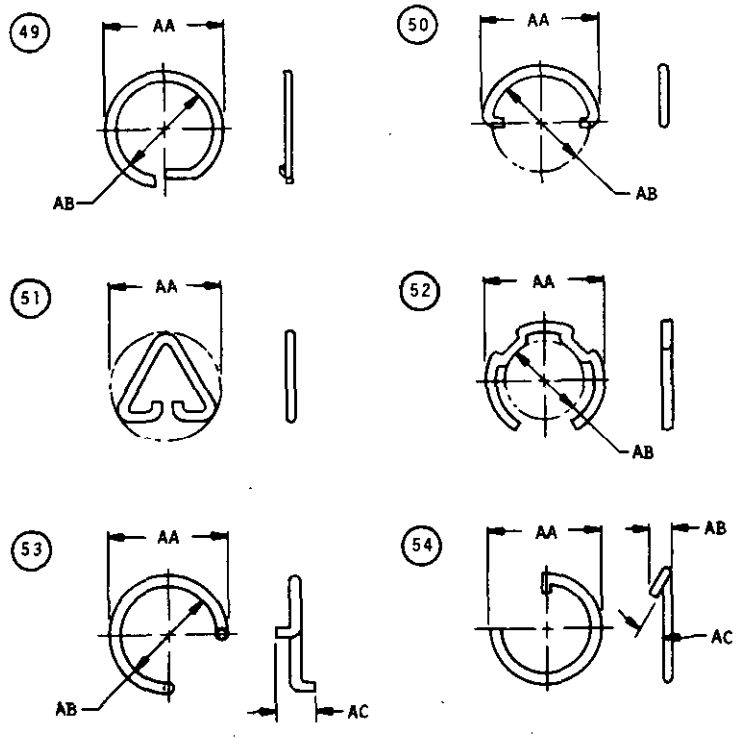


161-01-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

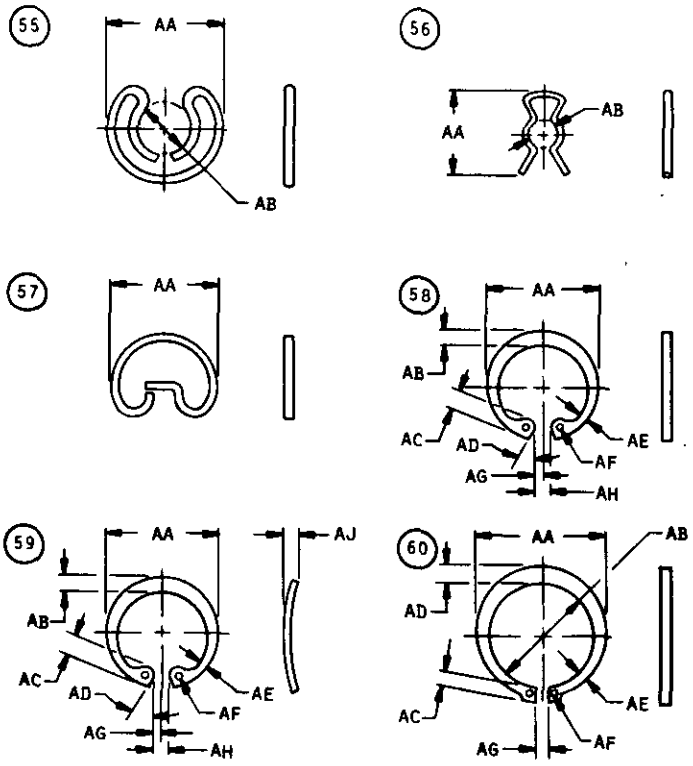


161-01-10

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

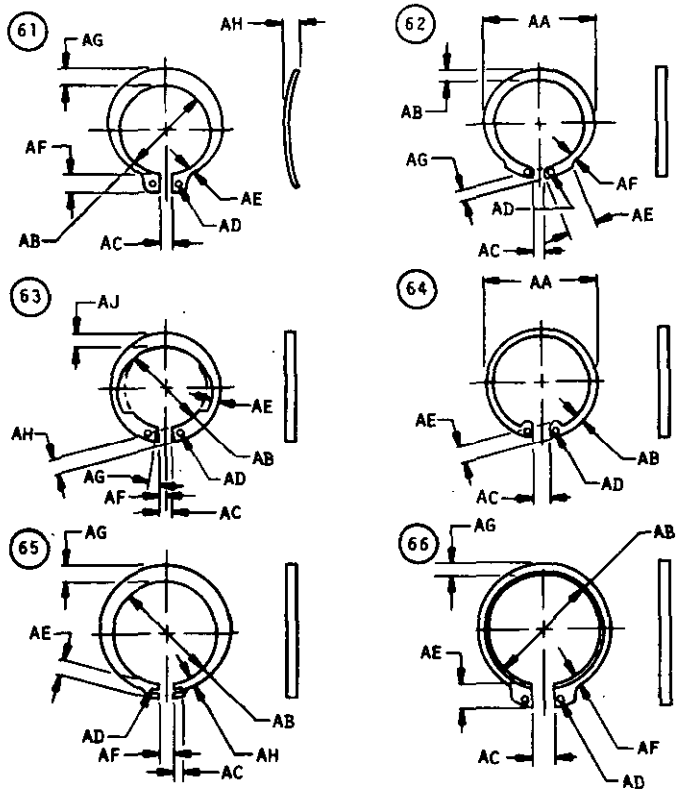


161-01-11

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

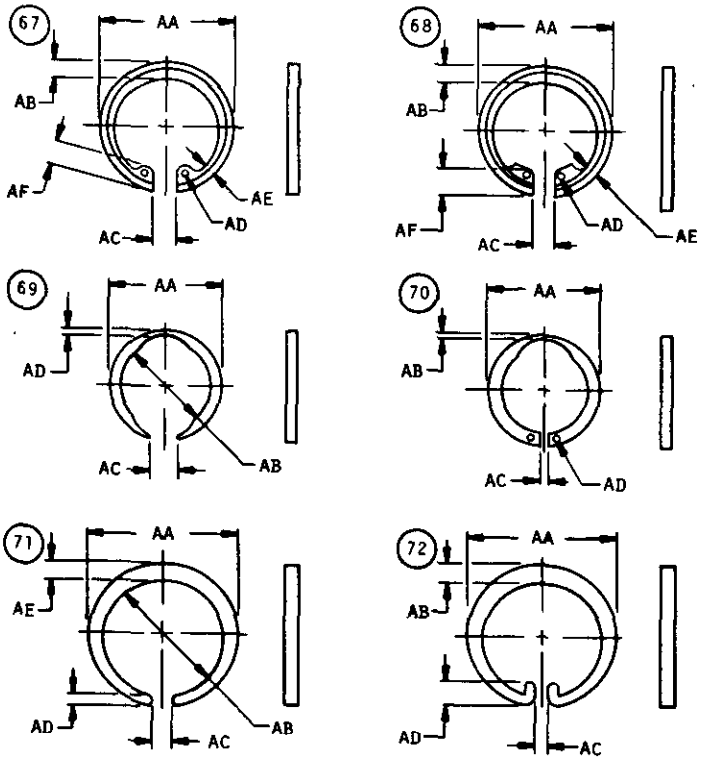


161-01-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

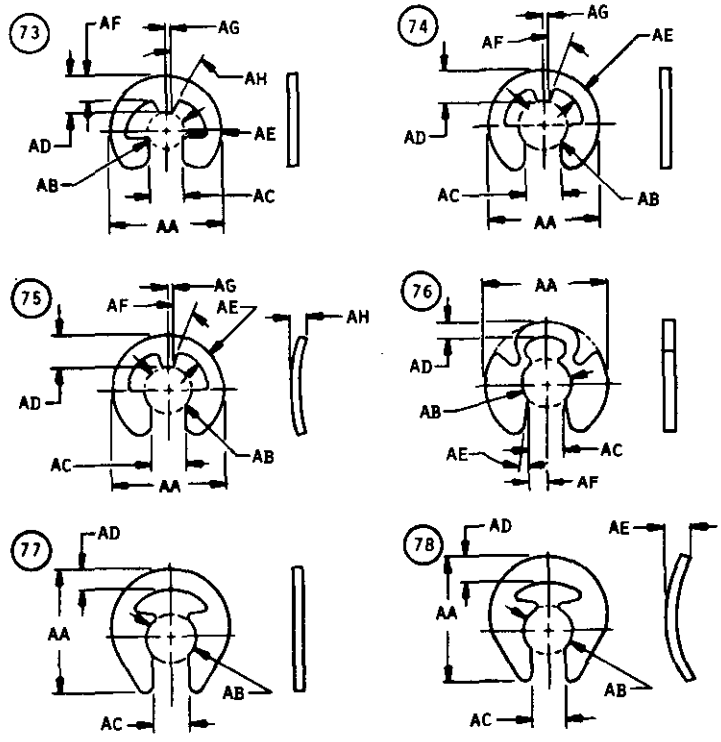


161-01-13

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

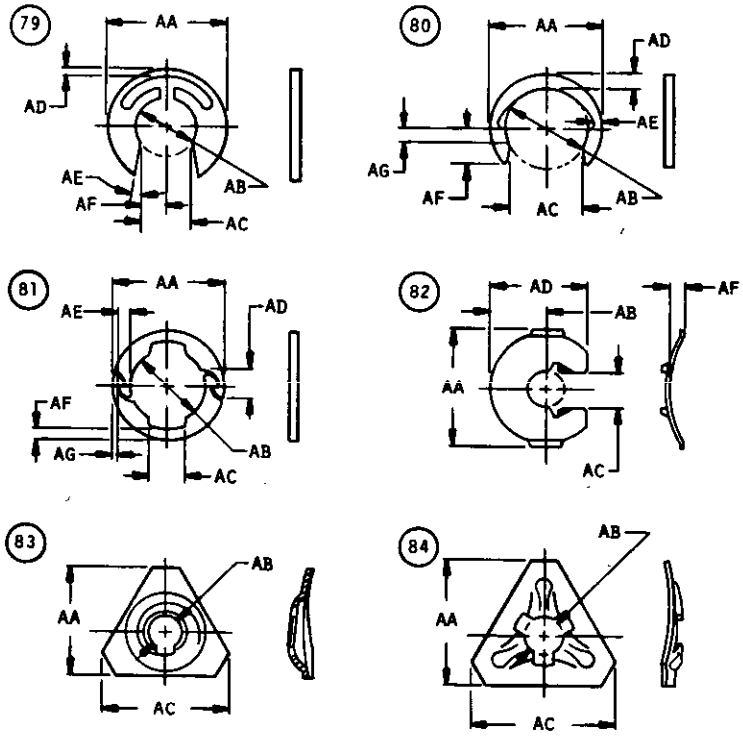


161-01-14

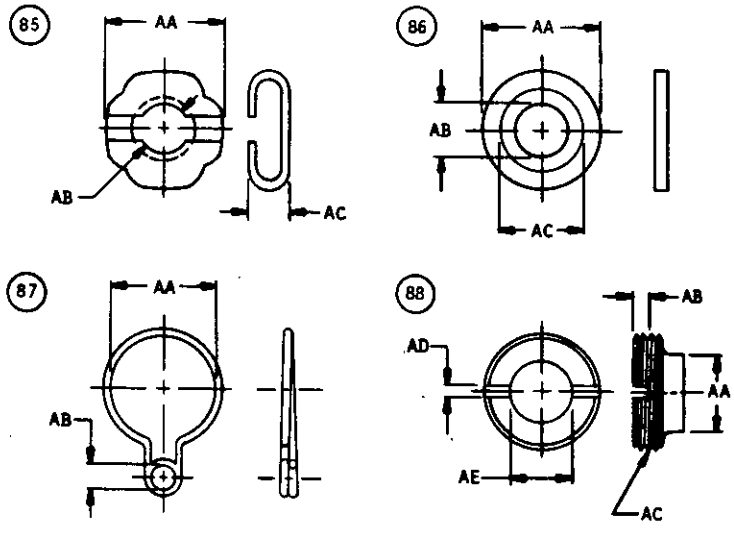


161-01-15

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

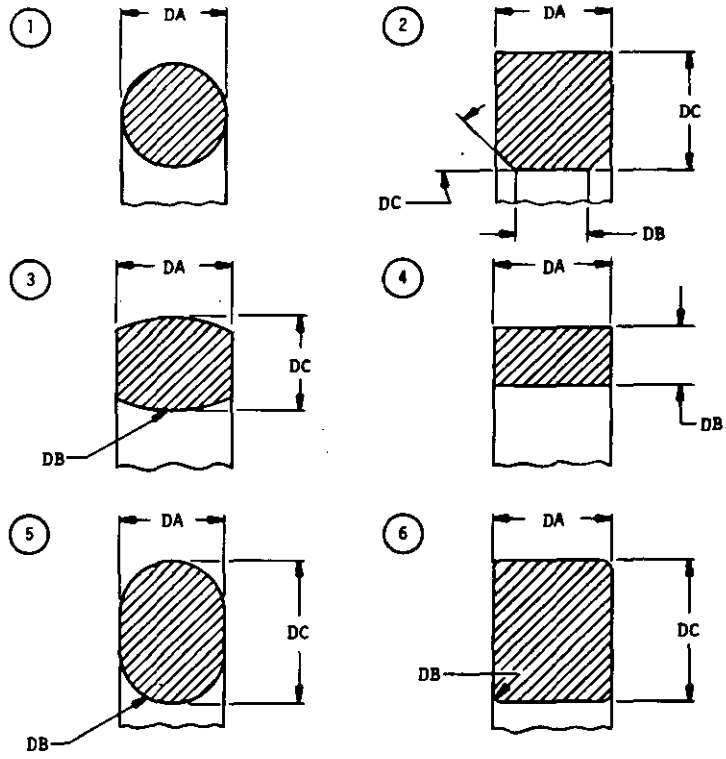


161-02-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

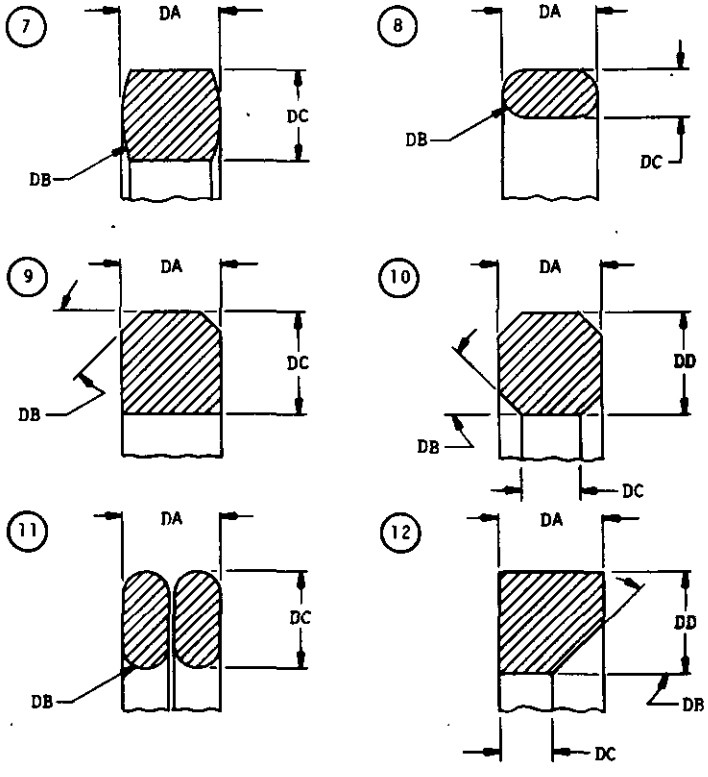


161-02-2

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

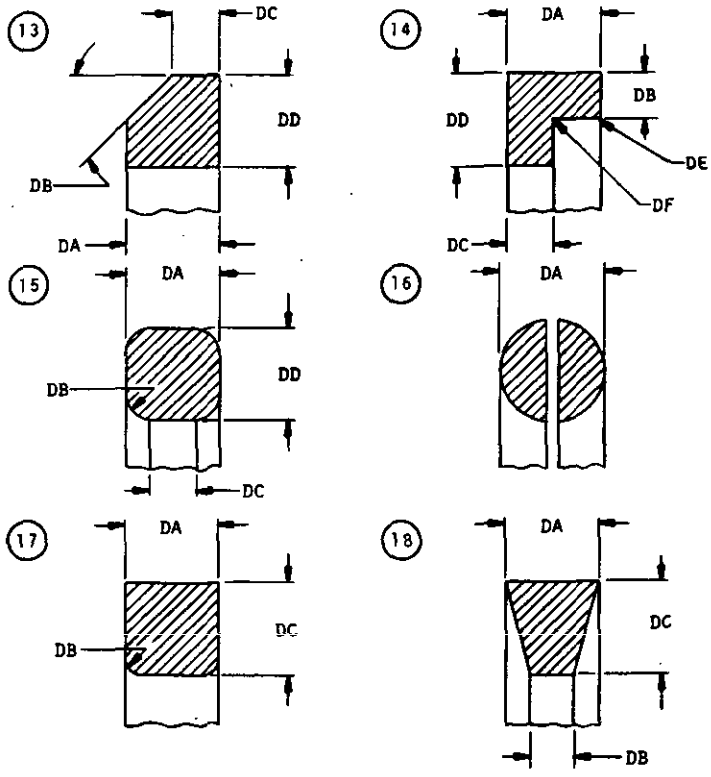

161-02-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

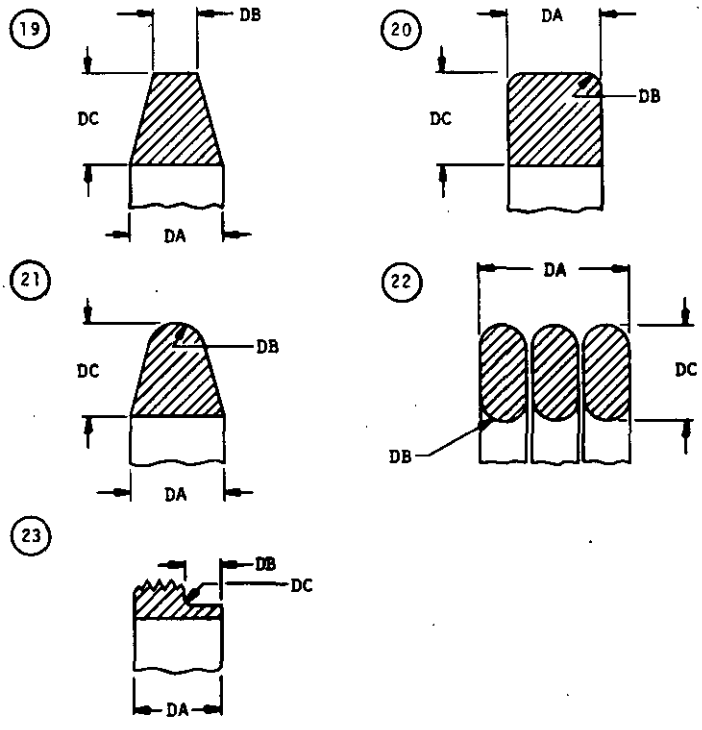

161-02-4

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	12	1634	18	1758	28	4789	36
0102	12	1635	18	1760	28	4798	36
0103	12	1651	44	1802	32	4799	36
0104	12	1652	44	1804	32	4816	36
0105	12	1653	44	1806	34	4878	42
0107	14	1654	44	1808	34	4881	36
0108	14	1655	46	1810	34	4950	26
0700	12	1656	46	1828	32	6367	44
0800	12	1659	38	1830	32	6369	12
1003	12	1660	38	1846	34	6372	46
1004	12	1661	36	1848	34	6794	28
1005	12	1662	38	1849	34	6797	28
1006	12	1664	38	1850	34	6799	28
1008	12	1679	40	1851	34	6802	28
1009	22	1680	40	1852	36	6870	46
1431	44	1681	40	1853	36	6873	12
1505	44	1682	40	1854	36	6874	14
1564	22	1684	40	1855	36	6941	14
1568	22	1695	42	1856	36	6942	14
1570	16	1696	42	1862	34	6991	48
1571	16	1697	42	1864	34	6992	48
1579	30	1698	42	1867	34	6993	48
1580	30	1700	42	1868	34	6994	48
1581	30	1714	22	1882	40	6995	48
1582	30	1715	22	1884	40	7001	46
1584	30	1716	22	1886	40	7002	46
1599	32	1718	22	1888	40	7003	46
1600	32	1720	22	1890	40	7004	46
1602	32	1730	18	1902	38	7005	46
1603	32	1732	18	1903	38	7021	28
1604	32	1734	18	1904	38	7022	28
1606	32	1735	20	1906	38	7035	30
1620	16	1738	20	1910	38	7036	30
1622	16	1739	20	4681	44	7037	30
1624	16	1747	20	4682	44	7038	30
1628	16	1748	20	4768	42	7572	24
1630	16	1750	20	4770	42	7573	24
1631	18	1752	20	4782	42	7574	24
1632	18	1753	22	4783	44	7576	24
1633	18	1756	28	4788	36	7577	24

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
7578	24						
7580	26						
7629	46						

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Additional Part Marking	48
Additional Requirements	46
Aperture Cards Required	14
Applicable Documents	48
Axial Kink	30
Base Document	12
City, State, Zip	12
Class	16
Classification	16
Classification Type	16
Company Name/Command	12
Configuration	22
Contract Number/Office Symbol	12
Control Source	12
Control Specification	14
Date	12
Deflection Rating	20
Design and Construction	28
Dish	32
Dynamic Thrust Load Rating	16
Embrittlement Relief	32
Finishes	26
Format	12
Government Design Activity FSCM	12
Hardness	34
Humidity	36
Illustrations	26
Materials	26
Metals	26
Misalignment	36
Nomenclature	48
Notes	48
Packaging	48
Part Marking	46

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Part Number	14
Part Number Cross-Reference	48
Permanent Set	38
Phone Number	12
Pitch	40
Quality Assurance Provisions	48
Radial Kink	42
Ratings	16
Relative Rotational Thrust Load Rating	20
Requester FSCM	12
Requester's Name	12
Revision of AEDPS Document Number	14
Rotational Speed Rating	20
Salt Spray	42
Scope	14
Shear Strength Rating	20
Source Table	14
Special Tools	22
Static Thrust Load Rating	18
Street/Building	12
Superseded Documents	48
System Application	12
Tabulated Characteristics	26
Temperature	28
Type	28
Units of Measure	14,24
Vibration	44
Weight	28
Workmanship	46

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-40A(MI), dated 28 August 1978 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

77/78

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-40A(MI), dated 28 August 1978 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander,
U.S. Army Missile R & D Command
ATTN: DRDMI-ESD
Redstone A rsenal, Alabama 35809

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.