DOD-STD-35-42A(MI)

31 AUGUST 1987

SUPERSEDING
MIL-STD-35-42
9 APRIL 1974

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

WAVEGUIDES

AREA EDS

NO DELIVERABLE DATA
REQUIRED BY THIS DOCUMENT

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL COMMAND
ALEXANDRIA, VA 22333

Waveguides
Automated Engineering
Document Preparation System

DOD-STD-35-42A(MI)

1. This Military Standard is approved for use by AMC, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Command, ATTN: AMSMI-RD-SE-TD-ST, Redstone Arsenal, Alabama 35898-5270, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-42A(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for Waveguides.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	3
	2.1	Government Documents	3
	2.1.1	Specifications and Standards	3
	2.2	Other Publications	3
	2.3	Order of Precedence	4
	3.	DEFINITIONS	5
	4.	GENERAL REQUIREMENTS	6
	4.1	Introduction	6
	4.2	Specification Requirement Sheet (SRS)	6
	4.3	Configuration	6
	4.3.1	Dimensions	6
	4.3.2	Illustrations	6
	4.4	Units of Measure	6
	5.	DETAILED REQUIREMENTS	7
	5.1	Introduction	7
	5.2	MSE Formats	7
	5.3	Referenced Documents	7
	5.4	Test Matrix	7
	5.5	Tabulation	9
	5.6	Keyword Code Index (KCI) and Standard Paragraphs	9
	5.6.1	Interrelationship of Codes	10
	5.6.2	Automatic MSE Data	10
	5.5.3	DOD-STD-35 Tables	10

TABLES

Table	I.	Title Index	2
	II.	Test Matrix	8
	III.	Tabulation Candidates	9

APPENDICES

APPENDIX	A.	Illustrations	78
	B.	Characteristic Code Index	94
		Index	98

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for Waveguides.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate a MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts, have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects applicable to all AEDPS dash-numbered parts and included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specification (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for a MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSEs for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes, listed in the Title Index and entered on a SRS, specifies that the title of the MSE will be the title shown in the Title Index.

Each MSE title, listed in the Title Index, is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference. When more than one document is listed for a MSE title, this information will be useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
WAVEGUIDE ASSEMBLY	090006	MIL-W-25913	FLEXIBLE AND RIGID
		MIL-W-87105	FLEXIBLE AND RIGID
WAVEGUIDE ASSEMBLY FLEXIBLE	090001	MIL-W-287	FLEXIBLE
WAVEGUIDE ASSEMBLY RIGID	090002	MIL-W-3970	RIGID
WAVEGUIDES	090007	MIL-W-85	RECTANGULAR RIGID
		MIL-W-23351	SINGLE AND DBL RIDGE, RIGID
		MIL-W-28839	ELLIPTICAL, FLEXIBLE AND SEMIRIGID

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Government Documents.

2.1.1 Specifications and Standards. Unless otherwise specified, the following specifications and standards, of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-W-287	Waveguide Assemblies, Flexible, Twistable and Nontwistable, General Specification for
MIL-W-25913	Waveguide, Ridged Assemblies, Flexible and Rigid, General Specification for

STANDARD

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-810	Environmental Test Methods and Engineering Guidelines

(Copies of specifications, standards, drawings, and publications, required by contractors in connection with specific procurement functions, should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other Publications. The following documents form a part of this standard to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the issue of the DoDISS specified in the solicitation. The issues of documents which have not been adopted shall be those in effect on the date of the cited DoDISS.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

ASTME18	Rockwell Hardness and Rockwell Superficial Hardness of Metallic Materials
ASTME380	Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, PA 19103.)

(Nongovernment standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of Precedence. In the event of conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to waveguides.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare a SRS for Waveguides, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Waveguides.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions, described in DOD-STD-35, are applicable to Waveguides.

4.3.2 Illustrations. Illustrations, applicable to Waveguides, are contained in Appendix A to this document.

4.4 Units of Measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE Formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced Documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Test Matrix. A test matrix is supplied as a guide for selecting documents to specify tests (see table II). The test matrix presents documents most applicable for use to satisfy the statement "TEST PER (DOC DES)". Any document listed in the Title Index may be used to satisfy the statement. However, the selected document from the Title Index must contain the desired test. Government test method documents and approved industry standards such as ASTM test methods may also be used to satisfy the statement "TEST PER (DOC DES)".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE II. TEST MATRIX

DOCUMENT / CODE	2062	2072	2082	2092	2102	2122	2132	2142	2162	2192	2198	2204	2212		
TEST	ATTENUATION	AXIAL TWIST	BENDING ANGLE	CHEMICAL COMPOSITION	COLD BENDING	FLEXURE	FREQUENCY RANGE	HEAT AGING	LEAKAGE/PRESSURIZATION	REPEATED TWIST	STABILITY OF ATTENUATION	TWIST MEASUREMENT	VSWR		
MIL-W-85	X						X					X			
MIL-W-287		X	X		X	X			X	X			X		
MIL-W-3970									X				X		
MIL-W-23351	X	X					X					X			
MIL-W-25913	X	X	X	X	X	X	X	X	X	X	X		X		
MIL-W-28839	X	X	X						X				X		
MIL-W-87105		X	X		X	X		X	X				X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.5 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table III provides codes for column headings which may be used for Waveguides characteristics. When different units of measure are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

TABLE III. TABULATION CANDIDATES

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1618	FREQUENCY HIGH GHZ	1619	FREQUENCY LOW GHZ	1622	FREQUENCY CUTOFF GHZ
7021	MAX WEIGHT GRAMS	7022	MAX WEIGHT OUNCES	7023	MAX WEIGHT POUNDS
7024	MAX WEIGHT KILOGRAMS				

5.6 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on a SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and it's associated code. Enter, on the SRS, the code and the characteristic value required. After the part's unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.6.1 Interrelationship of Codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The standard paragraph, of which the code is a part, is shown adjacent to the code on the right-hand page. When a characteristic value, entered with a code, becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact characteristic value entry, as supplied with the code, except for "X" entries.

5.6.2 Automatic MSE Data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without making additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.6.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in DOD-STD-35. Refer to DOD-STD-35 for general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

(THIS PAGE INTENTIONALLY LEFT BLANK)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*REQUESTER'S FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT.	0700
ONE SECTION DOCUMENT.	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currenversion before use.

CHAR CODE	STANDARD PARAGRAPH
6874	THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).
0107	
0108	0108. SCOPE.

SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.

PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.

PART NUMBER. THE PART NUMBER FOR THE ITEMS IS (THE SAME AS THE NUMBER OF THIS DOCUMENT) PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

6941	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.
6942	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ALTITUDE RATING	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5060
SEA LEVEL TO (METERS)	5061
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5062
SEA LEVEL TO (METERS)	5063
TEMPERATURE RATING	
MAXIMUM OPERATING (DEGREES CELSIUS)	5069
MAXIMUM STORAGE (DEGREES CELSIUS)	7302
MINIMUM OPERATING (DEGREES CELSIUS)	5068
MINIMUM STORAGE (DEGREES CELSIUS)	7301
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
DIMENSION TABLE, (SEE TABLE III, DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ALTITUDE RATING.
5060	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5060 FEET.
5061	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5061 METERS.
5062	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5062 FEET.
5063	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5063 METERS.
	TEMPERATURE RATING.
5069	THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS.
7302	THE MAXIMUM STORAGE TEMPERATURE RATING SHALL BE 7302 DEGREES CELSIUS.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.
7301	THE MINIMUM STORAGE TEMPERATURE RATING SHALL BE 7301 DEGREES CELSIUS.
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*UNITS (SELECT ONE)	
INCHES.	7572
MILLIMETERS.	7577
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950

NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.

TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)

MATERIALS (SEE TABLE VI, DOD-STD-35)

NOTE: AUTOMATIC WHEN TABLE VI IS USED.

FINISHES (SEE TABLE VII, DOD-STD-35)

NOTE: AUTOMATIC WHEN TABLE VII IS USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.

MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
METALS	
DISSIMILAR METALS	7580
DESIGN AND CONSTRUCTION	
WAVEGUIDE ASSEMBLY	2010
BEND ON PLANE (E OR H)	1571
SECTION (TYPE)	1570
ASSEMBLY SHALL INCLUDE:	
CHOKE FLANGE (PART NUMBER)	1574
*APPLICABLE (SPECIFICATION)	1575
COVER FLANGE (PART NUMBER)	1576
*APPLICABLE (SPECIFICATION)	1577
CONTACT FLANGE (PART NUMBER)	1578
*APPLICABLE (SPECIFICATION)	1579
WAVEGUIDE SECTION (PART NUMBER)	1580
*APPLICABLE (SPECIFICATION)	1581
ENDS	
CHOKE FLANGE, END 1.	1572
CHOKE FLANGE, END 2.	1583

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE | STANDARD PARAGRAPH

7580 METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.

DESIGN AND CONSTRUCTION.

2010 WAVEGUIDE ASSEMBLY. THE WAVEGUIDE ASSEMBLY SHALL BE OF THE DESIGN AND CONSTRUCTION SPECIFIED HEREIN.

1571 BEND SHALL BE ON THE 1571 PLANE.

1570 WAVEGUIDE SECTION SHALL BE OF THE 1570 TYPE.

THE ASSEMBLY SHALL INCLUDE THE FOLLOWING COMPONENTS:

1574 1575 CHOKE FLANGE, PART NUMBER 1574 PER SPECIFICATION 1575.

1576 1577 COVER FLANGE, PART NUMBER 1576 PER SPECIFICATION 1577.

1578 1579 CONTACT FLANGE, PART NUMBER 1578 PER SPECIFICATION 1579.

1580 1581 WAVEGUIDE SECTION, PART NUMBER 1580 PER SPECIFICATION 1581.

ENDS.

1572 END NUMBER 1 SHOWN ON THE ILLUSTRATION SHALL BE A CHOKE TYPE FLANGE.

1583 END NUMBER 2 SHOWN ON THE ILLUSTRATION SHALL BE A CHOKE TYPE FLANGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
COVER FLANGE, END 1.	1573
COVER FLANGE, END 2.	1584
CONTACT FLANGE, END 1.	1582
CONTACT FLANGE, END 2.	1585
PIN INSTALLATION (METHOD)	1586
ASSEMBLY FABRICATION (DOCUMENT IDENTIFIER)	2014
ECCENTRICITY MAXIMUM DEVIATION FROM MEAN THICKNESS (PERCENT)	1753
ANGULAR ALIGNMENT MAXIMUM DEVIATION OF FLANGE FROM PERPENDICULAR TO SECTION (MINUTES)	2020
BRAZING (DOCUMENT IDENTIFIER)	2030
(METHOD)	1774
WELDING (DOCUMENT IDENTIFIER)	2040

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1573	END NUMBER 1 SHOWN ON THE ILLUSTRATION SHALL BE A COVER TYPE FLANGE.
1584	END NUMBER 2 SHOWN ON THE ILLUSTRATION SHALL BE A COVER TYPE FLANGE.
1582	END NUMBER 1 SHOWN ON THE ILLUSTRATION SHALL BE A CONTACT TYPE FLANGE.
1585	END NUMBER 2 SHOWN ON THE ILLUSTRATION SHALL BE A CONTACT TYPE FLANGE.
1586	PIN INSTALLATION. PIN INSTALLATION SHALL BE BY 1586.
2014	ASSEMBLY FABRICATION. ASSEMBLY FABRICATION SHALL BE PER 2014.
1753	ECCENTRICITY. DEVIATION OF THE WALL THICKNESS AT ANY CROSS SECTION FROM THE MEAN WALL THICKNESS AT THAT CROSS SECTION SHALL BE NOT GREATER THAN 1753 PERCENT.
2020	ANGULAR ALIGNMENT. IN ASSEMBLING FLANGES TO A SECTION OF WAVEGUIDE, THE FLANGE FACE SHALL MAKE AN ANGLE OF 90 DEGREES + OR - 2020 MINUTE(S) WITH THE E- AND H- PLANES OF THE INTERNAL SURFACES OF THE WAVEGUIDE.
2030	BRAZING. BRAZING SHALL BE PER 2030.
1774	BRAZING SHALL BE PER 1774 METHOD.
2040	WELDING. WELDING SHALL BE PER 2040.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SURFACE ROUGHNESS	
MAXIMUM ARITHMETICAL AVERAGE (SELECT ONE)	
US	
INTERNAL (MICROINCH)	1814
EXTERNAL (MICROINCH)	1815
MATING SURFACE (MICROINCH)	1816
SI	
INTERNAL (MICROMETER)	2050
EXTERNAL (MICROMETER)	2052
MATING SURFACE (MICROMETER)	2054
BRIGHT, SMOOTH, DRY AND FREE OF SCALES OR OXIDES.	1817

PERFORMANCE CHARACTERISTICS (SEE TABLE X, DOD-STD-35)

NOTE: AUTOMATIC WHEN TABLE X IS USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	SURFACE ROUGHNESS.
1814	INTERNAL SURFACE ROUGHNESS SHALL BE LIMITED TO 1814 MICROINCH(S) MAXIMUM ARITHMETICAL AVERAGE.
1815	EXTERNAL SURFACE ROUGHNESS SHALL BE LIMITED TO 1815 MICROINCH(S) MAXIMUM ARITHMETICAL AVERAGE.
1816	MATING SURFACE ROUGHNESS SHALL BE LIMITED TO 1816 MICROINCH(S) MAXIMUM ARITHMETICAL AVERAGE.
2050	INTERNAL SURFACE ROUGHNESS SHALL BE LIMITED TO 2050 MICROMETER(S) MAXIMUM ARITHMETICAL AVERAGE.
2052	EXTERNAL SURFACE ROUGHNESS SHALL BE LIMITED TO 2052 MICROMETER(S) MAXIMUM ARITHMETICAL AVERAGE.
2054	MATING SURFACE ROUGHNESS SHALL BE LIMITED TO 2054 MICROMETER(S) MAXIMUM ARITHMETICAL AVERAGE.
1817	INTERIOR AND EXTERIOR SURFACES OF THE FINISHED WAVEGUIDE SHALL BE BRIGHT, SMOOTH, AND DRY, AND FREE FROM SCALES OR OXIDES.

PERFORMANCE CHARACTERISTICS. PERFORMANCE CHARACTERISTICS SHALL BE AS SHOWN IN THE PERFORMANCE CHARACTERISTICS TABLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WEIGHT/MASS	
MAXIMUM WEIGHT/MASS PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024
MAXIMUM WEIGHT/MASS PER UNIT LENGTH (SELECT ONE)	
U.S. PER FOOT (SELECT ONE)	
(OUNCES)	7050
(POUNDS)	7051
SI PER METER (SELECT ONE)	
(GRAMS)	7400
(KILOGRAMS)	7401

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7023	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).
7021	MAXIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	MAXIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).
7050	MAXIMUM WEIGHT PER FOOT. THE WEIGHT PER FOOT SHALL BE NOT GREATER THAN 7050 OUNCE(S).
7051	MAXIMUM WEIGHT PER FOOT. THE WEIGHT PER FOOT SHALL BE NOT GREATER THAN 7051 POUND(S).
7400	MAXIMUM MASS PER METER. THE MASS PER METER SHALL BE NOT GREATER THAN 7400 GRAM(S).
7401	MAXIMUM MASS PER METER. THE MASS PER METER SHALL BE NOT GREATER THAN 7401 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
BANDWIDTH RATIO SHALL BE ____	1703
ATTENTUATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1652
AS FOLLOWS:	2060
MAXIMUM ATTENUATION PER UNIT OF MEASURE (SELECT ONE)	
U.S.	
AT HIGH END OF FREQUENCY RANGE, MAX ATTENUATION PER 100 FEET (DECIBELS)	1653
AT LOW END OF FREQUENCY RANGE, MAX ATTENUATION PER 100 FEET (DECIBELS)	1654
AT HIGH END OF FREQUENCY RANGE, MAX ATTENUATION PER LINEAR FOOT (DECIBELS)	1655
AT LOW END OF FREQUENCY RANGE, MAX ATTENUATION PER LINEAR FOOT (DECIBELS)	1656
SI	
AT HIGH END OF FREQUENCY RANGE, MAX ATTENUATION PER 100 METERS (DECIBELS)	1659

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1703	BANDWIDTH RATIO. BANDWIDTH RATIO SHALL BE 1703.
1652	ATTENUATION. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1652.
2060	ATTENUATION. ATTENUATION SHALL BE AS FOLLOWS:
1653	ATTENUATION PER 100 LINEAR FEET, AT THE HIGH END OF THE FREQUENCY RANGE, SHALL BE NOT GREATER THAN 1653 DECIBEL(S).
1654	ATTENUATION PER 100 LINEAR FEET AT, THE LOW END OF THE FREQUENCY RANGE, SHALL BE NOT GREATER THAN 1654 DECIBEL(S).
1655	ATTENUATION PER LINEAR FOOT, AT THE HIGH END OF THE FREQUENCY RANGE, SHALL BE NOT GREATER THAN 1655 DECIBEL(S).
1656	ATTENUATION PER LINEAR FOOT, AT THE LOW END OF THE FREQUENCY RANGE, SHALL BE NOT GREATER THAN 1656 DECIBEL(S).
1659	ATTENUATION PER 100 LINEAR METERS, AT THE HIGH END OF THE FREQUENCY RANGE, SHALL BE NOT GREATER THAN 1659 DECIBEL(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
AT LOW END OF FREQUENCY RANGE, MAX ATTENUATION PER 100 METERS (DECIBELS)	1660
AT HIGH END OF FREQUENCY RANGE, MAX ATTENUATION PER METER (DECIBELS)	1661
AT LOW END OF FREQUENCY RANGE, MAX ATTENUATION PER METER (DECIBELS)	1662
MAXIMUM ATTENUATION OF COMPLETE ASSEMBLY	
AT HIGH END OF FREQUENCY RANGE (DECIBELS)	1657
AT LOW END OF FREQUENCY RANGE (DECIBELS)	1658
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1632
PER (DOC DES)	2062
FREQUENCY MEASURING DEVICE SHALL BE ____	1634
FREQUENCY TEST SET UP PER (ILLUSTRATION NUMBER)	1635
ATTENUATION TEST SET UP PER (ILLUSTRATION NUMBER)	1636
ATTENUATION TEST METHOD SHALL BE ____	1638

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
1660	ATTENUATION PER 100 LINEAR METERS, AT THE LOW END OF THE FREQUENCY RANGE, SHALL BE NOT GREATER THAN 1660 DECIBEL(S).
1661	ATTENUATION PER LINEAR METER, AT THE HIGH END OF THE FREQUENCY RANGE, SHALL BE NOT GREATER THAN 1661 DECIBEL(S).
1662	ATTENUATION PER LINEAR METER, AT THE LOW END OF THE FREQUENCY RANGE, SHALL BE NOT GREATER THAN 1662 DECIBEL(S).
1657	ATTENUATION OF THE COMPLETE ASSEMBLY, AT THE HIGH END OF THE FREQUENCY RANGE, SHALL BE NOT GREATER THAN 1657 DECIBEL(S).
1658	ATTENUATION OF THE COMPLETE ASSEMBLY, AT THE LOW END OF THE FREQUENCY RANGE, SHALL BE NOT GREATER THAN 1658 DECIBEL(S).
1632	ATTENUATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1632.
2062	ATTENUATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2062.
1634	THE FREQUENCY MEASURING DEVICE SHALL BE 1634.
1635	FREQUENCY MEASUREMENT TEST SET UP SHALL BE PER ILLUSTRATION 1635.
1636	ATTENUATION MEASUREMENT TEST SET UP SHALL BE PER ILLUSTRATION 1636.
1638	THE ATTENUATION MEASUREMENT TEST METHOD SHALL BE 1638.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
AXIAL TWIST	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ___	1922
AS FOLLOWS:	2070
STABILITY OF ATTENUATION SHALL BE ____	1924
MEET VSWR INITIAL LIMITS.	1923
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1912
PER (DOC DES)	2072
TWIST ANGLE (SELECT ONE)	
(DEGREES PER FOOT)	1915
(DEGREES PER METER)	2074
(DEGREES)	1920
CYCLES CLOCKWISE AND COUNTERCLOCKWISE (NUMBER)	1916
CYCLING RATE (TWISTS PER MINUTE)	1917
MEASURE ATTENUATION DURING TEST.	1918
MEASURE VSWR AFTER TEST.	1919

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1922	AXIAL TWIST. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1922.
2070	AXIAL TWIST. REQUIREMENT(S) SHALL BE AS FOLLOWS:
1924	STABILITY OF ATTENUATION SHALL BE 1924.
1923	VSWR SHALL MEET INITIAL LIMITS.
1912	AXIAL TWIST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1912.
2072	AXIAL TWIST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2072.
1915	TWIST ANGLE SHALL BE 1915 DEGREE(S) PER FOOT.
2074	TWIST ANGLE SHALL BE 2074 DEGREE(S) PER METER.
1920	TWIST ANGLE SHALL BE 1920 DEGREE(S).
1916	NUMBER OF CYCLES SHALL BE 1916 CLOCKWISE AND COUNTERCLOCKWISE.
1917	TWIST CYCLING RATE SHALL BE 1917 TWIST(S) PER MINUTE.
1918	STABILITY OF ATTENUATION SHALL BE MEASURED DURING TEST.
1919	VSWR SHALL BE MEASURED AFTER TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
BENDING ANGLE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1882
AS FOLLOWS:	2080
NO MECHANICAL DAMAGE.	1883
ATTENUATION WITHIN INITIAL LIMITS.	1884
VSWR WITHIN INITIAL LIMITS.	1885
STABILITY OF ATTENUATION SHALL BE ____	1886
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1872
PER (DOC DES)	2082
BENDING ANGLE (SELECT ONE)	
(DEGREES PER FOOT)	1875
(DEGREES PER METER)	2084
(DEGREES)	1887
PLANE OF BENDING (E OR H)	1876
CYCLES (NUMBER)	1877
CYCLING RATE (BEND PER MINUTE)	1878
MEASURE ATTENUATION DURING TEST.	1879
MEASURE VSWR AFTER TEST.	1880

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1882	BENDING ANGLE. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1882.
2080	BENDING ANGLE. REQUIREMENT(S) SHALL BE AS FOLLOWS:
1883	THERE SHALL BE NO MECHANICAL DAMAGE.
1884	ATTENUATION SHALL MEET INITIAL LIMITS.
1885	VSWR SHALL MEET INITIAL LIMITS.
1886	STABILITY OF ATTENUATION SHALL BE 1886.
1872	BENDING ANGLE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1872.
2082	BENDING ANGLE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2082.
1875	BENDING ANGLE SHALL BE 1875 DEGREE(S) PER FOOT.
2084	BENDING ANGLE SHALL BE 2084 DEGREE(S) PER METER.
1887	BENDING ANGLE SHALL BE 1887 DEGREE(S).
1876	PLANE OF BENDING SHALL BE 1876.
1877	NUMBER OF CYCLES SHALL BE 1877.
1878	BEND CYCLING RATE SHALL BE 1878 BEND(S) PER MINUTE.
1879	STABILITY OF ATTENUATION SHALL BE MEASURED DURING TEST.
1880	VSWR SHALL BE MEASURED AFTER TEST.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CHEMICAL COMPOSITION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2090
PER TABLE	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2091
PER (DOC DES)	2092

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE | STANDARD PARAGRAPH

2090 CHEMICAL COMPOSITION. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2090.

CHEMICAL COMPOSITION. CHEMICAL COMPOSITION OF THE WAVEGUIDE OR WAVEGUIDE ASSEMBLY, IN PERCENT BY WEIGHT, SHALL BE IN ACCORDANCE WITH THE CHEMICAL COMPOSITION TABLE.

CHEMICAL COMPOSITION TABLE

ELEMENT	PERCENT MINIMUM	PERCENT MAXIMUM
4140	4141	4142
4143	4144	4145
4146	4147	4148
4149	4150	4151
4152	4153	4154
4155	4156	4157
4158	4159	4160
4161	4162	4163
4164	4165	4166
4167	4168	4169
4170	4171	4172
4173	4174	4175
4176	4177	4178
4179	4180	4181
4182	4183	4184
4185	4186	4187

2091 CHEMICAL COMPOSITION. CHEMICAL ANALYSIS SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2091.

2092 CHEMICAL COMPOSITION. CHEMICAL ANALYSIS SHALL BE PERFORMED IN ACCORDANCE WITH 2092.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
COLD BENDING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1967
AS FOLLOWS:	2100
NO DAMAGE.	1968
ATTENUATION WITHIN INITIAL LIMITS.	1969
LEAKAGE WITHIN INITIAL LIMITS.	1970
VSWR WITHIN INITIAL LIMITS.	1971
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1952
PER (DOC DES)	2102
CHAMBER TEMPERATURE (DEGREES CELSIUS)	1955
TIME IN CHAMBER (HOURS)	1957
BEND ANGLE (SELECT ONE)	
(DEGREES PER FOOT)	1959
(DEGREES PER METER)	2104
(DEGREES)	1946
PLANE OF BENDING (E OR H)	1960
CYCLES (NUMBER)	1961

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1967	COLD BENDING. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1967.
2100	COLD BENDING. REQUIREMENT(S) SHALL BE AS FOLLOWS:
1968	THERE SHALL BE NO CHECKS, CRACKS, FRACTURES OR OTHER FLAWS IN THE JACKET OR METAL STRUCTURE.
1969	ATTENUATION SHALL MEET INITIAL LIMITS.
1970	LEAKAGE SHALL MEET INITIAL LIMITS.
1971	VSWR SHALL MEET INITIAL LIMITS.
1952	COLD BENDING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1952.
2102	COLD BENDING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2102.
1955	CHAMBER TEMPERATURE SHALL BE 1955 DEGREES CELSIUS.
1957	TIME IN CHAMBER SHALL BE 1957 HOUR(S).
1959	BEND ANGLE SHALL BE 1959 DEGREE(S) PER FOOT.
2104	BEND ANGLE SHALL BE 2104 DEGREE(S) PER METER.
1946	BEND ANGLE SHALL BE 1946 DEGREE(S).
1960	PLANE OF BENDING SHALL BE 1960.
1961	NUMBER OF CYCLES SHALL BE 1961.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CYCLING RATE (DEGREES PER SECOND)	1962
MEASURE ATTENUATION AFTER TEST.	1963
MEASURE LEAKAGE AFTER TEST.	1964
MEASURE VSWR AFTER TEST.	1965
EXTENSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1979
AS FOLLOWS:	2110
MAXIMUM DIMENSIONAL CHANGE (SELECT ONE)	
(INCHES)	1980
(MILLIMETERS)	2112
VSWR WITHIN INITIAL LIMITS.	1982
STABILITY OF ATTENUATION SHALL BE ____	1981
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1972
PER MIL-W-25913.	1983
EXTENSION RATE (EXTENSIONS PER MINUTE)	1973
CYCLES (QUANTITY)	1974
MEASURE ATTENUATION DURING TEST.	1975

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1962	BEND CYCLING RATE SHALL BE 1962 DEGREE(S) PER SECOND.
1963	ATTENUATION SHALL BE MEASURED AFTER TEST.
1964	LEAKAGE (PRESSURIZATION) SHALL BE MEASURED AFTER TEST.
1965	VSWR SHALL BE MEASURED AFTER TEST.
1979	EXTENSION. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1979.
2110	EXTENSION. REQUIREMENT(S) SHALL BE AS FOLLOWS:
1980	DIMENSIONAL CHANGE SHALL BE NOT GREATER THAN 1980 INCH(S).
2112	DIMENSIONAL CHANGE SHALL BE NOT GREATER THAN 2112 MILLIMETER(S).
1982	VSWR SHALL MEET INITIAL LIMITS.
1981	STABILITY OF ATTENUATION SHALL BE 1981.
1972	EXTENSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1972.
1983	EXTENSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-W-25913.
1973	EXTENSIONS SHALL BE APPLIED AT THE RATE OF 1973 PER MINUTE.
1974	NUMBER OF CYCLES SHALL BE 1974.
1975	STABILITY OF ATTENUATION SHALL BE MEASURED DURING TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MEASURE VSWR AFTER TEST.	1976
FLEXURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1904
AS FOLLOWS:	2120
STABILITY OF ATTENUATION SHALL BE ____	1905
VSWR WITHIN INITIAL LIMITS.	1906
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1892
PER (DOC DES)	2122
TEST METHOD (DESIGNATION)	1895
BEND ANGLE (SELECT ONE)	
(DEGREES PER FOOT)	1896
(DEGREES PER METER)	2124
(DEGREES)	1907
PLANE OF BENDING (E OR H)	1897
CYCLES (NUMBER)	1898
CYCLE RATE (BENDS PER MINUTE)	1899
ECCENTRICITY (PERCENT)	1900

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1976	VSWR SHALL BE MEASURED AFTER TEST.
1904	FLEXURE. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1904.
2120	FLEXURE. REQUIREMENT(S) SHALL BE AS FOLLOWS:
1905	STABILITY OF ATTENUATION SHALL BE 1905.
1906	VSWR SHALL MEET INITIAL LIMITS.
1892	FLEXURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1892.
2122	FLEXURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2122.
1895	TEST METHOD 1895 SHALL BE USED.
1896	BEND ANGLE SHALL BE 1896 DEGREE(S) PER FOOT.
2124	BEND ANGLE SHALL BE 2124 DEGREE(S) PER METER.
1907	BEND ANGLE SHALL BE 1907 DEGREE(S).
1897	PLANE OF BENDING SHALL BE 1897.
1898	NUMBER OF CYCLES SHALL BE 1898.
1899	BEND CYCLING RATE SHALL BE 1899 BEND(S) PER MINUTE.
1900	ECCENTRICITY SHALL BE 1900 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MEASURE ATTENUATION DURING TEST.	1901
MEASURE VSWR AFTER TEST.	1902
FREQUENCY RANGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1617
AS FOLLOWS:	2130
HIGH END OF RANGE (GIGAHERTZ)	1618
LOW END OF RANGE (GIGAHERTZ)	1619
OPERATION MODE (DESIGNATION)	1620
MINIMUM CUTOFF FREQUENCY (GIGAHERTZ)	1622
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1602
PER (DOC DES)	2132
FREQUENCY MEASUREMENT DEVICE SHALL BE ____	1604
FREQUENCY MEASUREMENT ILLUSTRATION (NUMBER)	1605

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1901	STABILITY OF ATTENUATION SHALL BE MEASURED DURING TEST.
1902	VSWR SHALL BE MEASURED AFTER TEST.
1617	FREQUENCY RANGE. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1617.
2130	FREQUENCY RANGE. REQUIREMENT(S) SHALL BE AS FOLLOWS:
1618	THE HIGH END OF RANGE SHALL BE 1618 GIGAHERTZ.
1619	THE LOW END OF RANGE SHALL BE 1619 GIGAHERTZ.
1620	OPERATION MODE SHALL BE 1620.
1622	MINIMUM CUTOFF FREQUENCY SHALL BE 1622 GIGAHERTZ.
1602	FREQUENCY RANGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1602.
2132	FREQUENCY RANGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2132.
1604	THE FREQUENCY MEASUREMENT DEVICE SHALL BE 1604.
1605	FREQUENCY MEASUREMENT TEST SET UP SHALL BE PER ILLUSTRATION 1605.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HARDNESS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1830
PER TABLE	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1827

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE | STANDARD PARAGRAPH

1830 HARDNESS. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1830.

HARDNESS. REQUIREMENT(S) SHALL BE AS SHOWN IN THE MATERIAL HARDNESS TABLE.

MATERIAL HARDNESS TABLE

MATERIAL	METHOD AND SCALE	HARDNESS VALUE	
		MINIMUM	MAXIMUM
4201	4202	4203	4204
4207	4208	4209	4210
4213	4214	4215	4216
4219	4220	4221	4222
4225	4226	4227	4228
4231	4232	4233	4234
4237	4238	4239	4240

1827 HARDNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1827.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PER TABLE	
HEAT AGING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2004
AS FOLLOWS:	2140
ATTENUATION WITHIN INITIAL LIMITS.	2005
VSWR WITHIN INITIAL LIMITS.	2006
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1992
PER (DOC DES)	2142
OVEN TEMPERATURE (DEGREES CELSIUS)	1995
TIME IN OVEN (DAYS)	1997

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE | STANDARD PARAGRAPH

HARDNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE MATERIAL HARDNESS TEST TABLE.

MATERIAL HARDNESS TEST TABLE

MATERIAL	TEST METHOD	TEST SPECIFICATION
4000	4001	4002
4003	4004	4005
4006	4007	4008
4009	4010	4011
4012	4013	4014
4015	4016	4017
4018	4019	4020

2004 HEAT AGING. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2004.

2140 HEAT AGING. REQUIREMENT(S) SHALL BE AS FOLLOWS:

2005 ATTENUATION SHALL MEET INITIAL LIMITS.

2006 VSWR SHALL MEET INITIAL LIMITS.

1992 HEAT AGING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1992.

2142 HEAT AGING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2142.

1995 OVEN TEMPERATURE SHALL BE 1995 DEGREES CELSIUS.

1997 TIME IN OVEN SHALL BE 1997 DAY(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MEASURE ATTENUATION AFTER TEST.	2001
MEASURE VSWR AFTER TEST.	2002
LEAKAGE (PRESSURIZATION)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2150
AS FOLLOWS:	2152
NO LEAKAGE OR JACKET ADHERENCE LOSS.	2154
VSWR WITHIN INITIAL LIMITS.	2156
STABILITY OF ATTENUATION SHALL BE ____	2158
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2160
PER (DOC DES)	2162
TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2164
(KILOPASCALS)	2166
TEST MEDIA (NAME)	2168
MEDIA TEMPERATURE (DEGREES CELSIUS)	2170
TEST DURATION (HOURS)	2172

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2001	ATTENUATION SHALL BE MEASURED AFTER TEST.
2002	VSWR SHALL BE MEASURED AFTER TEST.
2150	LEAKAGE (PRESSURIZATION). REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2150.
2152	LEAKAGE (PRESSURIZATION). REQUIREMENT(S) SHALL BE AS FOLLOWS:
2154	THERE SHALL BE NO LEAKAGE OR LOSS OF ADHERENCE OF THE JACKET.
2156	VSWR SHALL MEET INITIAL LIMITS.
2158	STABILITY OF ATTENUATION SHALL BE 2158.
2160	LEAKAGE (PRESSURIZATION). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2160.
2162	LEAKAGE (PRESSURIZATION). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2162.
2164	TEST PRESSURE SHALL BE 2164 POUNDS PER SQUARE INCH GAGE.
2166	TEST PRESSURE SHALL BE 2166 KILOPASCALS.
2168	TEST MEDIA SHALL BE 2168.
2170	MEDIA TEMPERATURE SHALL BE 2170 DEGREES CELSIUS.
2172	DURATION OF THE TEST SHALL BE 2172 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PRESSURE RISE TIME (MINUTES)	2174
MEASURE ATTENUATION AFTER TEST.	2176
MEASURE VSWR DURING TEST.	2178
MOISTURE RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1400
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	1396
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1391
PER MIL-STD-202, METHOD 106.	1397
STEP 7A NOT APPLICABLE.	4985
STEP 7B NOT APPLICABLE.	4986
MOUNT PER DOCUMENT (DOC DES)	1449
POWER HANDLING CAPABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1716

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2174	PRESSURE RISE TIME SHALL BE 2174 MINUTE(S).
2176	STABILITY OF ATTENUATION SHALL BE MEASURED DURING TEST.
2178	VSWR SHALL BE MEASURED DURING TEST.
1400	MOISTURE RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1400.
1396	MOISTURE RESISTANCE. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
1391	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1391.
1397	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 106 OF MIL-STD-202.
4985	STEP 7A OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
4986	STEP 7B OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
1449	MOUNTING SHALL BE IN ACCORDANCE WITH 1449.
1716	POWER HANDLING CAPABILITY. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1716.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
AS FOLLOWS:	2180
NO EVIDENCE OF DAMAGE.	1717
ATTENUATION WITHIN INITIAL LIMITS.	1718
VSWR WITHIN INITIAL LIMITS.	1719
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1710
PER MIL-W-287.	2182
APPLIED POWER (SELECT ONE)	
(MEGAWATTS)	1705
(KILOWATTS)	1706
FREQUENCY (GIGAHERTZ)	1707
SIMULATED ALTITUDE (SELECT ONE)	
(FEET)	1711
(METERS)	2184
TEST TEMPERATURE (DEGREES CELSIUS)	1712
TEST DURATION (MINUTES)	1708
MEASURE ATTENUATION AFTER TEST.	1713
MEASURE VSWR AFTER TEST.	1714

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2180	POWER HANDLING CAPABILITY. REQUIREMENT(S) SHALL BE AS FOLLOWS:
1717	THERE SHALL BE NO CRACKS, FRACTURES, OR OTHER FLAWS IN THE JACKET OR METAL STRUCTURES.
1718	ATTENUATION SHALL MEET INITIAL LIMITS.
1719	VSWR SHALL MEET INITIAL LIMITS.
1710	POWER HANDLING CAPABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1710.
2182	POWER HANDLING CAPABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-W-287.
1705	APPLIED POWER SHALL BE 1705 MEGAWATT(S).
1706	APPLIED POWER SHALL BE 1706 KILOWATT(S).
1707	FREQUENCY SHALL BE 1707 GIGAHERTZ.
1711	SIMULATED ALTITUDE SHALL BE 1711 FEET.
2184	SIMULATED ALTITUDE SHALL BE 2184 METER(S).
1712	TEST TEMPERATURE SHALL BE 1712 DEGREES CELSIUS.
1708	TEST DURATION SHALL BE 1708 MINUTE(S).
1713	ATTENUATION SHALL BE MEASURED AFTER TEST.
1714	VSWR SHALL BE MEASURED AFTER TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
REPEATED TWIST	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1942
AS FOLLOWS:	2190
STABILITY OF ATTENUATION SHALL BE ____	1944
VSWR WITHIN INITIAL LIMITS.	1943
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ___	1932
PER (DOC DES)	2192
TWIST ANGLE (SELECT ONE)	
(DEGREES PER FOOT)	1935
(DEGREES PER METER)	2194
(DEGREES)	1940
CYCLES (NUMBER)	1936
CYCLING RATE (TWISTS PER MINUTE)	1937
MEASURE ATTENUATION DURING TEST.	1938
MEASURE VSWR AFTER TEST.	1939

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1942	REPEATED TWIST. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1942.
2190	REPEATED TWIST. REQUIREMENT(S) SHALL BE AS FOLLOWS:
1944	STABILITY OF ATTENUATION SHALL BE 1944.
1943	VSWR SHALL MEET INITIAL LIMITS.
1932	REPEATED TWIST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1932.
2192	REPEATED TWIST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2192.
1935	TWIST ANGLE SHALL BE 1935 DEGREE(S) PER FOOT.
2194	TWIST ANGLE SHALL BE 2194 DEGREE(S) PER METER.
1940	TWIST ANGLE SHALL BE 1940 DEGREE(S).
1936	NUMBER OF CYCLES SHALL BE 1936.
1937	TWIST CYCLING RATE SHALL BE 1937 TWIST(S) PER MINUTE.
1938	STABILITY OF ATTENUATION SHALL BE MEASURED DURING TEST.
1939	VSWR SHALL BE MEASURED AFTER TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT SPRAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4878
NO EVIDENCE OF CORROSION.	2300
ATTENUATION WITHIN INITIAL LIMITS.	2302
VSWR WITHIN INITIAL LIMITS.	2304
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4770
PER MIL-STD-202, METHOD 101.	4771
*TEST CONDITION (LETTER)	4772
MOUNTING (SELECT ONE)	
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4773
MOUNTING SHALL BE BY NORMAL METHOD.	4765
MOUNTING SHALL BE BY ANY SUITABLE METHOD.	4766
MEASURE ATTENUATION BEFORE AND AFTER TEST.	2320
MEASURE VSWR AFTER TEST.	2322

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4878	SALT SPRAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4878.
2300	SALT SPRAY. THERE SHALL BE NO EVIDENCE OF DESTRUCTIVE CORROSION (ANY TYPE OF CORROSION WHICH IN ANY WAY INTERFERES WITH THE MECHANICAL OR ELECTRICAL PERFORMANCE).
2302	ATTENUATION SHALL MEET INITIAL LIMITS.
2304	VSWR SHALL MEET INITIAL LIMITS.
4770	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4770.
4771	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 101 OF MIL-STD-202.
4772	TEST CONDITION LETTER 4772 SHALL APPLY.
4773	MOUNTING SHALL BE IN ACCORDANCE WITH 4773.
4765	MOUNTING SHALL BE BY THE NORMAL METHOD.
4766	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
2320	ATTENUATION SHALL BE MEASURED BEFORE AND AFTER THE TEST.
2322	VSWR SHALL BE MEASURED AFTER THE TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, SPECIFIED PULSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1508
NO EVIDENCE OF PHYSICAL DAMAGE.	1509
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1502
PER MIL-STD-202, METHOD 213.	1500
*TEST CONDITION (LETTER)	1504
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	4686
NORMAL MOUNTING METHOD.	4685
MOUNT PER DOCUMENT (DOC DES)	4684
STABILITY OF ATTENUATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1868

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1508	SHOCK, SPECIFIED PULSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1508.
1509	SHOCK, SPECIFIED PULSE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1502	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1502.
1500	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 213 OF MIL-STD-202.
1504	TEST CONDITION LETTER 1504 SHALL APPLY.
4686	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4685	MOUNTING SHALL BE BY THE NORMAL METHOD.
4684	MOUNTING SHALL BE IN ACCORDANCE WITH 4684.
1868	STABILITY OF ATTENUATION. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1868.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM ATTENUATION CHANGE AFTER DEFORMATION (PERCENT)	1869
TEST METHOD (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1862
PER (DOC DES)	2198
MEASURE AT MIDBAND FREQUENCY.	1865
MEASURE AT INITIAL FREQUENCIES.	1866
THERMAL SHOCK (TEMPERATURE CYCLING)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4722
NO EVIDENCE OF PHYSICAL DAMAGE.	4723
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4713
PER MIL-STD-202, METHOD 107.	4714

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1869	STABILITY OF ATTENUATION. ATTENUATION SHALL BE NOT GREATER THAN 1869 PERCENT OF INITIAL REQUIREMENT(S) AT ANY TIME DURING PERFORMANCE OF THE APPLICABLE DEFORMATION TEST.
1862	STABILITY OF ATTENUATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1862.
2198	STABILITY OF ATTENUATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2198.
1865	ATTENUATION SHALL BE MEASURED AT MID BAND FREQUENCY WHILE SPECIMEN IS BEING DEFORMED.
1866	ATTENUATION SHALL BE MEASURED AT FREQUENCY(S) SPECIFIED FOR INITIAL ATTENUATION TEST WHILE SPECIMEN IS BEING DEFORMED.
4722	THERMAL SHOCK (TEMPERATURE CYCLING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4722.
4723	THERMAL SHOCK (TEMPERATURE CYCLING). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4713	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4713.
4714	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 107 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST CONDITION (LETTER)	4715
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4719
TWIST MEASUREMENT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1836
AS FOLLOWS:	2200
MAXIMUM TWIST (SELECT ONE)	
(DEGREES PER FOOT)	1837
(DEGREES PER METER)	2202
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1832
PER (DOC DES)	2204
VIBRATION, HIGH FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1455

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4715	TEST CONDITION LETTER 4715 SHALL APPLY.
4719	MOUNTING SHALL BE IN ACCORDANCE WITH 4719.
1836	TWIST MEASUREMENT. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1836.
2200	TWIST MEASUREMENT. REQUIREMENT(S) SHALL BE AS FOLLOWS:
1837	TWIST ALONG THE LONGITUDINAL AXIS SHALL BE NOT GREATER THAN 1837 DEGREES PER FOOT OF LENGTH ON THE FACE OF THE INTERIOR OR EXTERIOR SURFACES.
2202	TWIST ALONG THE LONGITUDINAL AXIS SHALL BE NOT GREATER THAN 2202 DEGREES PER METER OF LENGTH ON THE FACE OF THE INTERIOR OR EXTERIOR SURFACES.
1832	TWIST MEASUREMENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1832.
2204	TWIST MEASUREMENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2204.
1455	VIBRATION, HIGH FREQUENCY. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1455.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NO EVIDENCE OF PHYSICAL DAMAGE.	1456
ATTENUATION WITHIN INITIAL LIMITS.	2312
VSWR WITHIN INITIAL LIMITS.	2314
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1446
PER MIL-STD-202, METHOD 204.	1447
*TEST CONDITION (LETTER)	1448
PERCENT RATED LOAD APPLIED (PERCENT)	6200
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4709
NORMAL MOUNTING METHOD.	4708
MOUNT PER DOCUMENT (DOC DES)	4707
METHOD OF DETERMINING MECHANICAL RESONANCE (SELECT ONE)	
VISUALLY BY MEANS OF A STROBOTAC.	1533
ELECTRICAL OUTPUT INDICATORS.	1534
MEASURE ATTENUATION AFTER TEST.	2332
MEASURE VSWR AFTER TEST.	2334

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1456	VIBRATION, HIGH FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2312	ATTENUATION SHALL MEET INITIAL LIMITS.
2314	VSWR SHALL MEET INITIAL LIMITS.
1446	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1446.
1447	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 204 OF MIL-STD-202.
1448	TEST CONDITION LETTER 1448 SHALL APPLY.
6200	LOAD SHALL BE 6200 PERCENT OF THE RATED LOAD.
4709	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4708	MOUNTING SHALL BE BY THE NORMAL METHOD.
4707	MOUNTING SHALL BE IN ACCORDANCE WITH 4707.
1533	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE VISUALLY BY MEANS OF A STROBOTAC.
1534	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE BY ELECTRICAL OUTPUT INDICATORS.
2332	ATTENUATION SHALL BE MEASURED AFTER THE TEST.
2334	VSWR SHALL BE MEASURED AFTER THE TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1435
NO EVIDENCE OF PHYSICAL DAMAGE.	1436
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1426
PER MIL-STD-202, METHOD 214.	1427
*TEST CONDITION (ROMAN NUMERAL AND LETTER)	1428
*DURATION OF APPLICATION (SELECT ONE)	
(MINUTES)	1438
(HOURS)	1431
MONITORING INSTRUMENTATION OF EXCITATION (SELECT ONE)	
ANY SUITABLE SYSTEM.	1452
CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.	1453

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1435	VIBRATION, RANDOM. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1435.
1436	VIBRATION, RANDOM. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1426	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1426.
1427	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 214 OF MIL-STD-202.
1428	TEST CONDITION NUMBER AND LETTER 1428 SHALL APPLY.
1438	DURATION OF THE TEST SHALL BE 1438 MINUTE(S).
1431	DURATION OF THE TEST SHALL BE 1431 HOUR(S).
1452	MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE ANY SUITABLE INSTRUMENTATION SYSTEM.
1453	MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CALIBRATED OSCILLOSCOPE.	1459
NUMBER OF VIBRATION MONITORING TEST POINTS (QUANTITY)	1430
LOCATION OF MONITORING POINTS (SELECT ONE)	
ANY SUITABLE LOCATION.	1439
AS CLOSE AS PRACTICAL TO TEST SPECIMEN.	1462
METHOD MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4977
NORMAL MOUNTING METHOD.	4976
MOUNT PER DOCUMENT (DOC DES)	4975
VOLTAGE STANDING WAVE RATIO (VSWR)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1685
AS FOLLOWS:	2210
MAXIMUM ASSEMBLY (VSWR)	1686
*FREQUENCY (GIGAHERTZ)	1687

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1459	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED OSCILLOSCOPE.
1430	THERE SHALL BE 1430 VIBRATION MONITORING POINT(S).
1439	LOCATION OF VIBRATION MONITORING POINTS SHALL BE ANY SUITABLE LOCATION.
1462	LOCATION OF VIBRATION MONITORING POINTS SHALL BE AS CLOSE AS PRACTICAL TO THE TEST SPECIMEN(S).
4977	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4976	MOUNTING SHALL BE BY THE NORMAL METHOD.
4975	MOUNTING SHALL BE IN ACCORDANCE WITH 4975.
1685	VOLTAGE STANDING WAVE RADIO (VSWR). REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1685.
2210	VOLTAGE STANDING WAVE RADIO (VSWR). REQUIREMENT(S) SHALL BE AS FOLLOWS:
1686 1687	OVERALL VSWR OF THE ASSEMBLY, INCLUDING REFLECTIONS FROM THE CHOKE COVER JOINTS NECESSARY TO COUPLE THE ASSEMBLY TO THE TEST EQUIPMENT, SHALL BE NOT GREATER THAN 1686 AT A FREQUENCY OF 1687 GIGAHERTZ.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM (VSWR)	1690
*FREQUENCY (GIGAHERTZ)	1691
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT ____	1672
PER (DOC DES)	2212
FREQUENCY MEASURING DEVICE SHALL BE ____	1680
TEST SET UP PER (ILLUSTRATION)	1679
SLOTTED SECTION FOR MEASURING.	1681
HYBRID JUNCTION FOR MEASURING.	1682
FIXED SHORTING DEVICE.	1683
VARIABLE SHORTING DEVICE.	1684
MOUNTING HARDWARE (SEE TABLE VIII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VIII IS USED.	
WORKMANSHIP	
(DOC DES)	6870

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1690 1691	VSWR SHALL BE NOT GREATER THAN 1690 AT A FREQUENCY OF 1691 GIGAHERTZ.
1672	VOLTAGE STANDING WAVE RATIO (VSWR). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1672.
2212	VOLTAGE STANDING WAVE RATIO (VSWR). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2212.
1680	FREQUENCY MEASURING DEVICE SHALL BE 1680.
1679	VSWR TEST SET UP SHALL BE PER ILLUSTRATION 1679.
1681	VSWR MEASURING DEVICE SHALL BE A SLOTTED SECTION.
1682	VSWR MEASURING DEVICE SHALL BE A HYBRID JUNCTION SUCH AS A MAGIC TEE, BIDIRECTIONAL OR UNIDIRECTIONAL COUPLER.
1683	SHORTING DEVICE SHALL BE FIXED.
1684	SHORTING DEVICE SHALL BE VARIABLE.

MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.

6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.

6372 PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.

7630 PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.

7629 PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.

ADDITIONAL PART MARKING.

6991 (A) 6991.

6992 (B) 6992.

6993 (C) 6993.

6994 (D) 6994.

6995 (E) 6995.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

Custodians:
Army-MI

User activity:
Army-MU

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

Preparing activity:
Army-MI


(Project EDS-A368)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX A


ILLUSTRATIONS


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

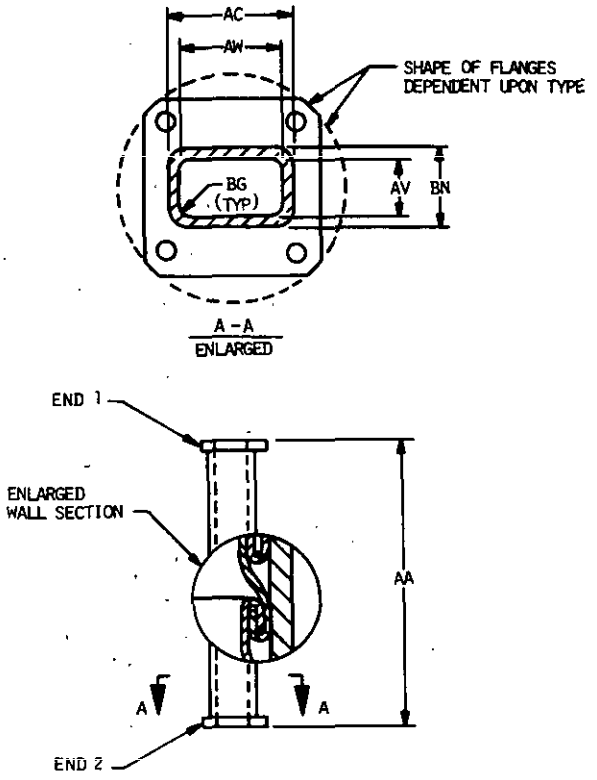

098-01-1


Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

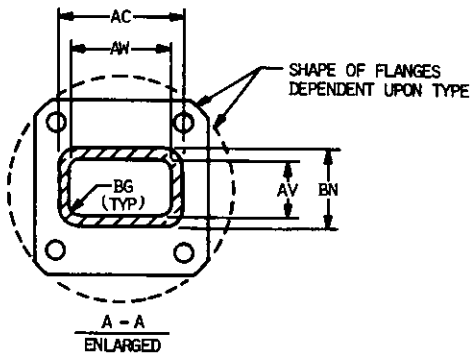

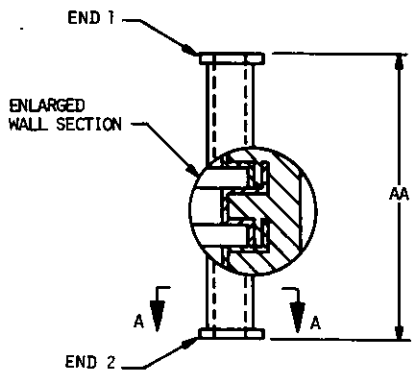


090-02-1


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

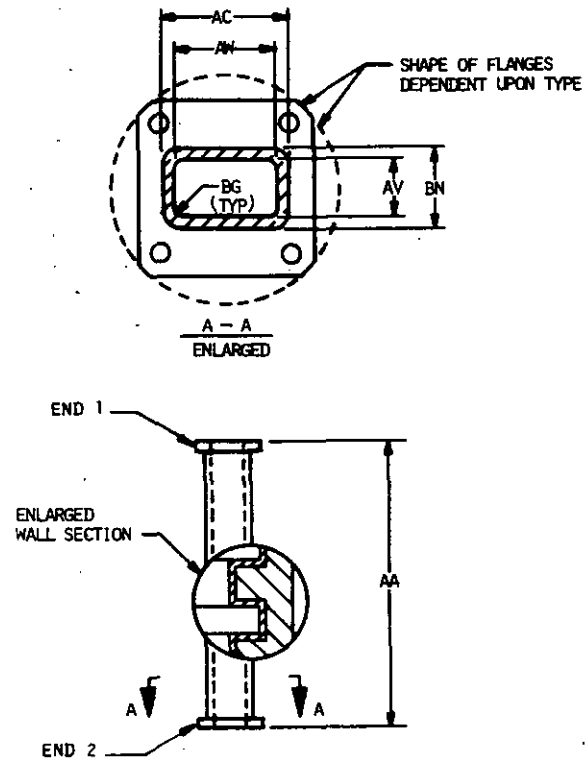

090-03-1


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

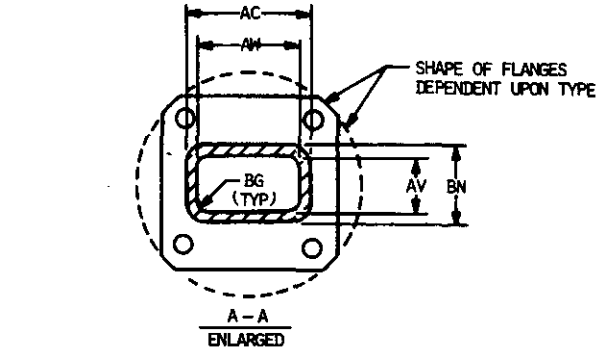

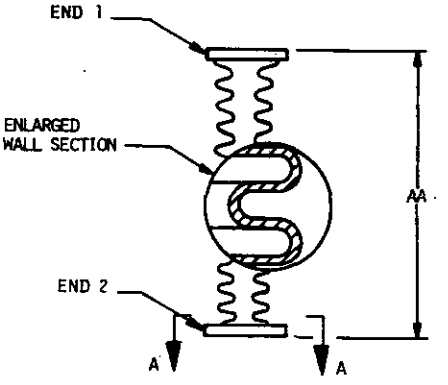


090-04-1


Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

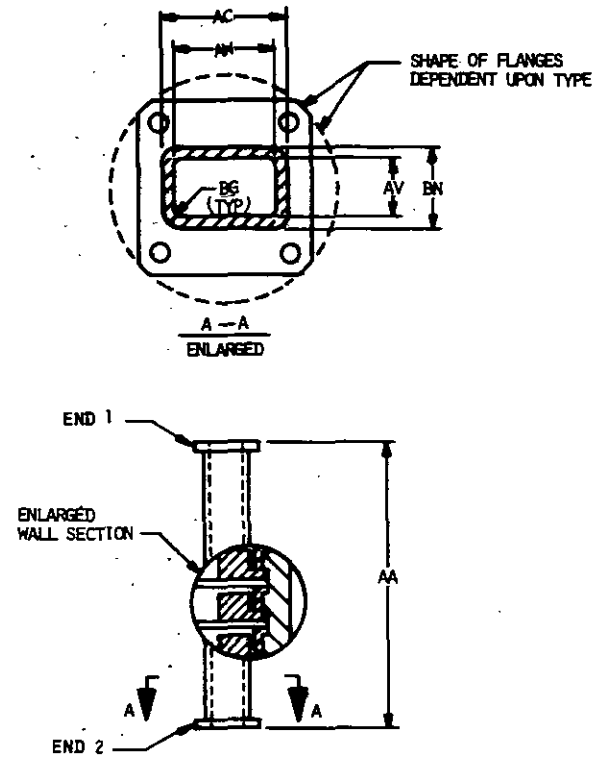

MS-1


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

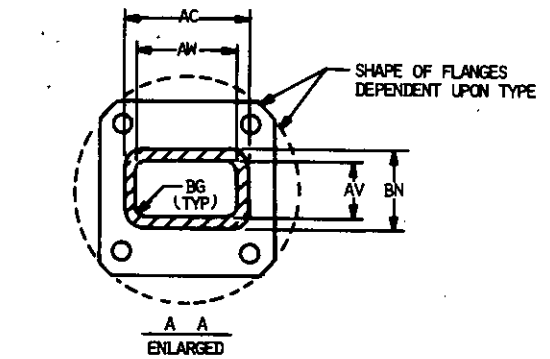

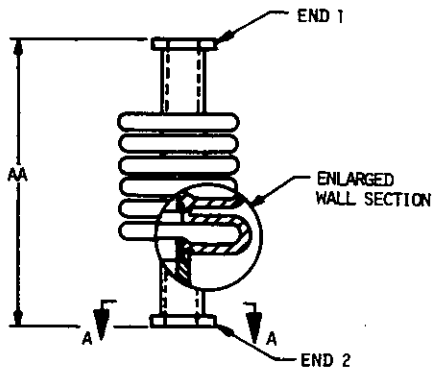



090-06-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

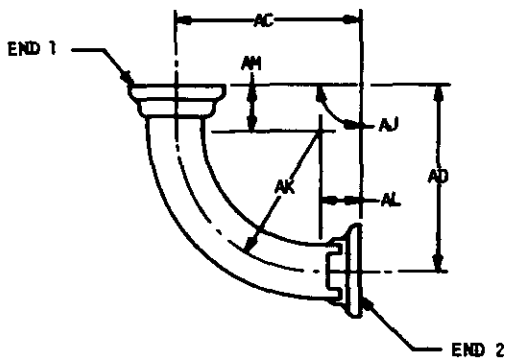


090-07-1



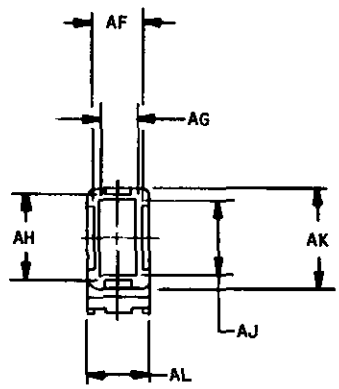


090-07-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

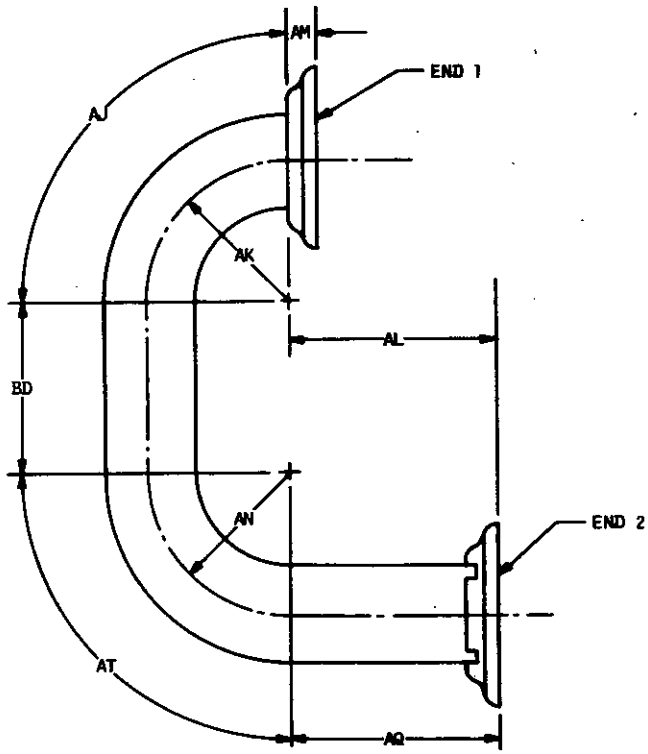


090-08-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

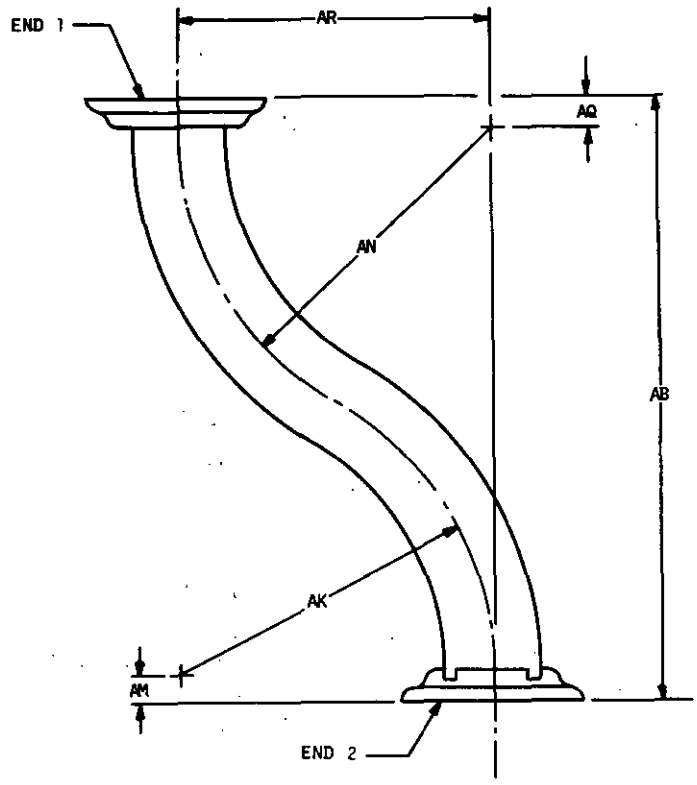


090-09-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

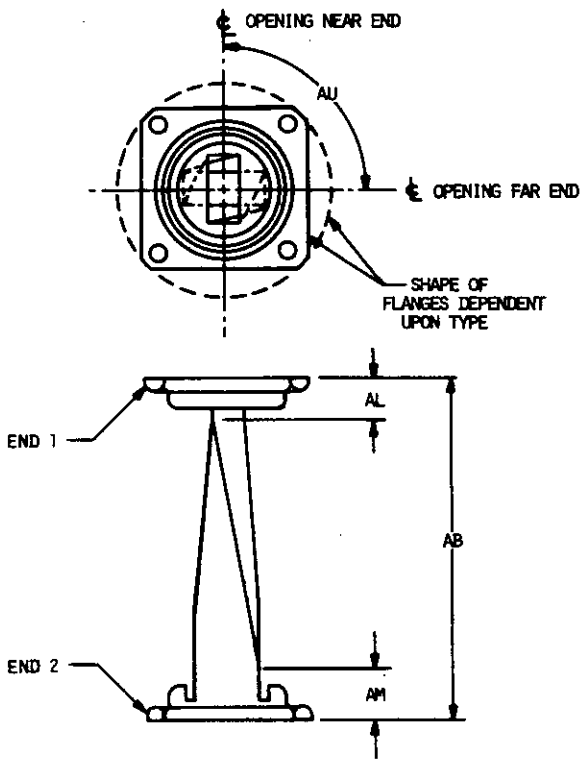


090-10-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

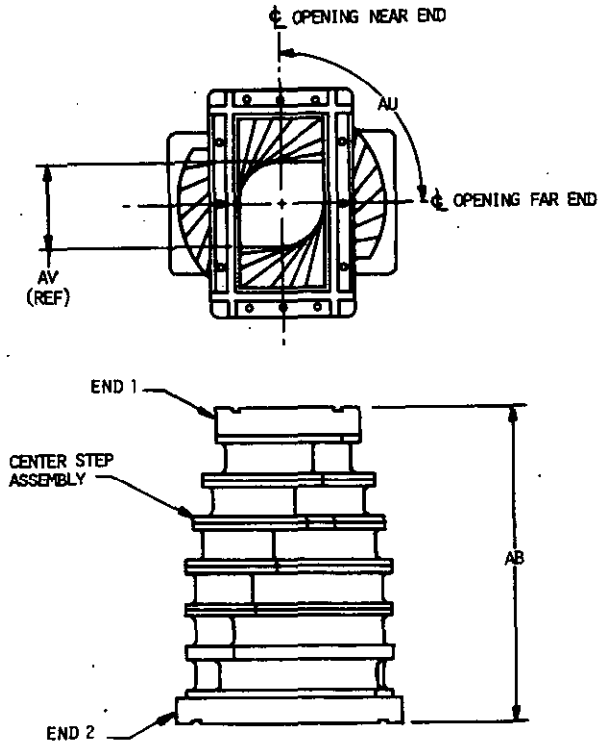


090-11-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

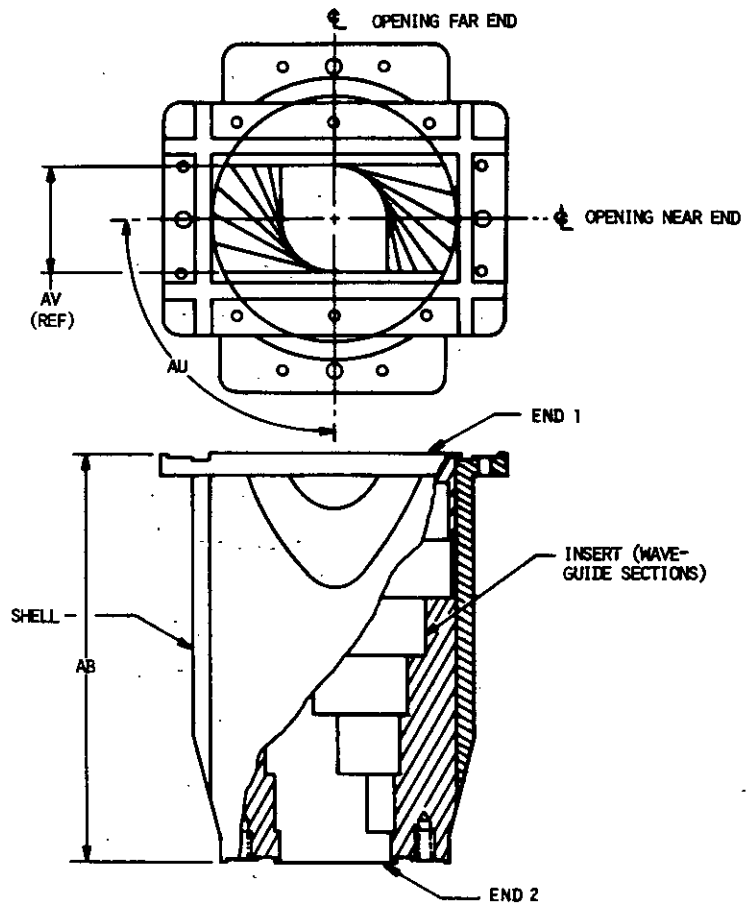


090-11-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

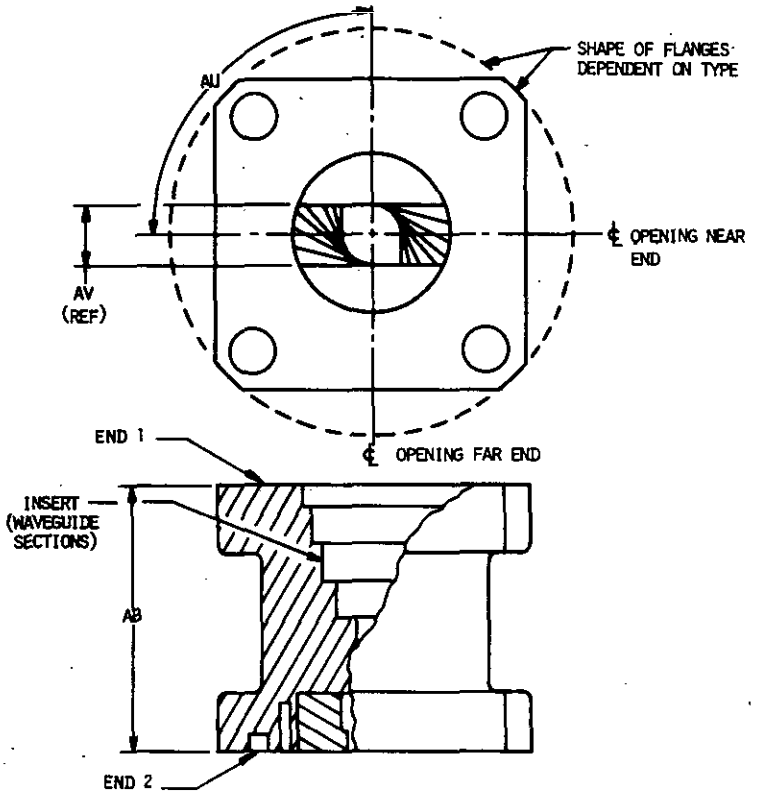


090-11-3

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

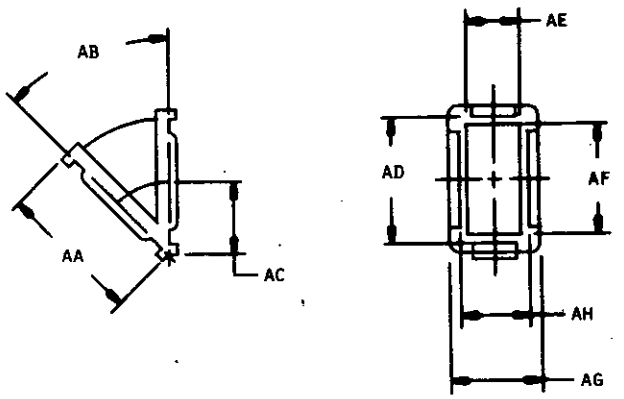


090-11-4

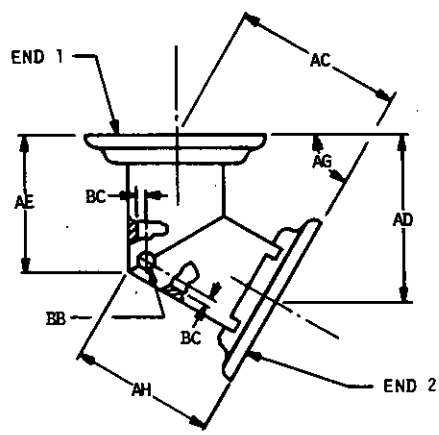

090-12-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

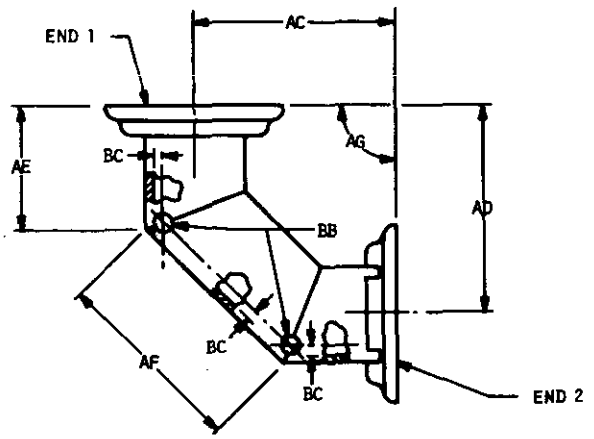

098-12-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	12	1508	60	1658	30	1836	64
0102	12	1509	60	1659	28	1837	64
0103	12	1533	66	1660	30	1862	62
0104	12	1534	66	1661	30	1865	62
0105	12	1570	20	1662	30	1866	62
0107	14	1571	20	1672	72	1868	60
0108	14	1572	20	1679	72	1869	62
0700	12	1573	22	1680	72	1872	34
0800	12	1574	20	1681	72	1875	34
1004	12	1575	20	1682	72	1876	34
1005	12	1576	20	1683	72	1877	34
1006	12	1577	20	1684	72	1878	34
1008	12	1578	20	1685	70	1879	34
1009	16	1579	20	1686	70	1880	34
1391	52	1580	20	1687	70	1882	34
1396	52	1581	20	1690	72	1883	34
1397	52	1582	22	1691	72	1884	34
1400	52	1583	20	1703	28	1885	34
1426	68	1584	22	1705	54	1886	34
1427	68	1585	22	1706	54	1887	34
1428	68	1586	22	1707	54	1892	42
1430	70	1602	44	1708	54	1895	42
1431	68	1604	44	1710	54	1896	42
1435	68	1605	44	1711	54	1897	42
1436	68	1617	44	1712	54	1898	42
1438	68	1618	44	1713	54	1899	42
1439	70	1619	44	1714	54	1900	42
1446	66	1620	44	1716	52	1901	44
1447	66	1622	44	1717	54	1902	44
1448	66	1632	30	1718	54	1904	42
1449	52	1634	30	1719	54	1905	42
1452	68	1635	30	1753	22	1906	42
1453	68	1636	30	1774	22	1907	42
1455	64	1638	30	1814	24	1912	32
1456	66	1652	28	1815	24	1915	32
1459	70	1653	28	1816	24	1916	32
1462	70	1654	28	1817	24	1917	32
1500	60	1655	28	1827	46	1918	32
1502	60	1656	28	1830	46	1919	32
1504	60	1657	30	1832	64	1920	32

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1922	32	1995	48	2154	50	4006	49
1923	32	1997	48	2156	50	4007	49
1924	32	2001	50	2158	50	4008	49
1932	56	2002	50	2160	50	4009	49
1935	56	2004	48	2162	50	4010	49
1936	56	2005	48	2164	50	4011	49
1937	56	2006	48	2166	50	4012	49
1938	56	2010	20	2168	50	4013	49
1939	56	2014	22	2170	50	4014	49
1940	56	2020	22	2172	50	4015	49
1942	56	2030	22	2174	52	4016	49
1943	56	2040	22	2176	52	4017	49
1944	56	2050	24	2178	52	4018	49
1946	38	2052	24	2180	54	4019	49
1952	38	2054	24	2182	54	4020	49
1955	38	2060	28	2184	54	4140	37
1957	38	2062	30	2190	56	4141	37
1959	38	2070	32	2192	56	4142	37
1960	38	2072	32	2194	56	4143	37
1961	38	2074	32	2198	62	4144	37
1962	40	2080	34	2200	64	4145	37
1963	40	2082	34	2202	64	4146	37
1964	40	2084	34	2204	64	4147	37
1965	40	2090	36	2210	70	4148	37
1967	38	2091	36	2212	72	4149	37
1968	38	2092	36	2300	58	4150	37
1969	38	2100	38	2302	58	4151	37
1970	38	2102	38	2304	58	4152	37
1971	38	2104	38	2312	66	4153	37
1972	40	2110	40	2314	66	4154	37
1973	40	2112	40	2320	58	4155	37
1974	40	2120	42	2322	58	4156	37
1975	40	2122	42	2332	66	4157	37
1976	42	2124	42	2334	66	4158	37
1979	40	2130	44	4000	49	4159	37
1980	40	2132	44	4001	49	4160	37
1981	40	2140	48	4002	49	4161	37
1982	40	2142	48	4003	49	4162	37
1983	40	2150	50	4004	49	4163	37
1992	48	2152	50	4005	49	4164	37

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4165	37	4226	47	5068	16		
4166	37	4227	47	5069	16		
4167	37	4228	47	6200	66		
4168	37	4231	47	6369	12		
4169	37	4232	47	6372	74		
4170	37	4233	47	6870	72		
4171	37	4234	47	6873	12		
4172	37	4237	47	6874	14		
4173	37	4238	47	6941	14		
4174	37	4239	47	6942	14		
4175	37	4240	47	6991	74		
4176	37	4684	60	6992	74		
4177	37	4685	60	6993	74		
4178	37	4686	60	6994	74		
4179	37	4707	66	6995	74		
4180	37	4708	66	7001	74		
4181	37	4709	66	7002	74		
4182	37	4713	62	7003	74		
4183	37	4714	62	7004	74		
4184	37	4715	64	7005	74		
4185	37	4719	64	7021	26		
4186	37	4722	62	7022	26		
4187	37	4723	62	7023	26		
4201	47	4765	58	7024	26		
4202	47	4766	58	7050	26		
4203	47	4770	58	7051	26		
4204	47	4771	58	7301	16		
4207	47	4772	58	7302	16		
4208	47	4773	58	7400	26		
4209	47	4878	58	7401	26		
4210	47	4950	18	7572	18		
4213	47	4975	70	7577	18		
4214	47	4976	70	7580	20		
4215	47	4977	70	7629	74		
4216	47	4985	52	7630	74		
4219	47	4986	52				
4220	47	5060	16				
4221	47	5061	16				
4222	47	5062	16				
4225	47	5063	16				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Additional Part Marking	74
Additional Requirements	74
Altitude Rating	16
Aperture Cards Required	14
Applicable Documents	76
Attenuation	28
Axial Twist	32
Bandwidth Ratio	28
Base Document	12
Bending Angle	34
Chemical Composition	36
City, State, Zip	12
Cold Bending	38
Company Name/Command	12
Configuration	16
Contract Number/Office Symbol	12
Control, Source	12
Control, Specification	14
Design and Construction	20
Extension	40
Finishes	18
Flexure	42
Format	12
Frequency Range	44
Government Design Activity FSCM	12
Hardness	46
Heat Aging	48
Illustrations	18
Leakage (Pressurization)	50
Materials	18
Metals	20
Moisture Resistance	52
Mounting Hardware	72

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Nomenclature	76
Notes	76
Packaging	76
Part Marking	74
Part Number	14
Part Number Cross-Reference	76
Performance Characteristics	24
Phone Number	12
Power Handling Capability	52
Quality Assurance Provisions	76
Repeated Twist	56
Requester's FSCM	12
Requester's Name	12
Revision of AEDPS Document (Number)	14
Salt Spray	58
Scope	14
Shock, Specified Pulse	60
Source Table	14
Stability of Attenuation	60
Street/Building	12
Superseded Document	76
System Application	12
Tabulated Characteristics	18
Temperature Rating	16
Thermal Shock (Temperature Cycling)	62
Twist Measurement	64
Units of Measure	14
Vibration, High Frequency	64
Vibration, Random	68
Voltage Standing Wave Ration (VSWR)	70
Weight/Mass	26
Workmanship	72

☆U.S. GOVERNMENT PRINTING OFFICE: 1987—704-036/74928

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

The digital copy of DOD-STD-35-42A(MI), dated 31 August 1987 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-42A(MI), dated 31 August 1987 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

COMMANDER
US ARMY MISSILE COMMAND
ATTN: AMSMI-RD-SE-TD-ST
REDSTONE ARSENAL, AL 35898-5270

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.