DOD-STD-35-44A(MI)

31 AUGUST 1987

SUPERSEDING
MIL-STD-35-44
19 MAY 1974

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

SYNCHROS

AREA EDS

NO DELIVERABLE DATA
REQUIRED BY THIS DOCUMENT

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL COMMAND
ALEXANDRIA, VA 22333

Synchros
Automated Engineering
Document Preparation System

DOD-STD-35-44A(MI)

1. This Military Standard is approved for use by AMC, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Command, ATTN: AMSMI-RD-SE-TD-ST, Redstone Arsenal, Alabama 35898-5270, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-44A(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for Synchros.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	3
	2.1	Government Documents	3
	2.1.1	Specifications and Standards	3
	2.2	Order of Precedence	3
	3.	DEFINITIONS	4
	4.	GENERAL REQUIREMENTS	5
	4.1	Introduction	5
	4.2	Specification Requirement Sheet (SRS)	5
	4.3	Configuration	5
	4.3.1	Dimensions	5
	4.3.2	Illustrations	5
	4.4	Units of Measure	5
	5.	DETAILED REQUIREMENTS	6
	5.1	Introduction	6
	5.2	MSE Formats	6
	5.3	Referenced Documents	6
	5.4	Tabulation	6
	5.5	Keyword Code Index (KCI) and Standard Paragraphs	7
	5.5.1	Interrelationship of Codes	7
	5.5.2	Automatic MSE Data	7
	5.5.3	DOD-STD-35 Tables	7

TABLES

Table	I.	Title Index	2
	II.	Tabulation Candidates	6

APPENDICES

APPENDIX	A.	Illustrations	132
	B.	Characteristic Code Index	144
		Index	150

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for Synchros.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate a MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts, have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects applicable to all AEDPS dash-numbered parts and included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specification (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for a MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSEs for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes, listed in the Title Index and entered on a SRS, specifies that the title of the MSE will be the title shown in the Title Index.

Each MSE title, listed in the Title Index, is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference. When more than one document is listed for a MSE title, this information will be useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
SYNCHRO, CONTROL DIFFERENTIAL TRANSMITTER	080007	MIL-S-20708	GENERAL SPEC.
SYNCHRO, CONTROL TRANSFORMER	080003	MIL-S-20708	GENERAL SPEC.
SYNCHRO, CONTROL TRANSMITTER	080005	MIL-S-20708	GENERAL SPEC.
SYNCHRO, TORQUE DIFFERENTIAL RECEIVER	080016	MIL-S-20708	GENERAL SPEC.
SYNCHRO, TORQUE DIFFERENTIAL TRANSMITTER	080014	MIL-S-20708	GENERAL SPEC.
SYNCHRO, TORQUE RECEIVER	080009	MIL-S-20708	GENERAL SPEC.
SYNCHRO, TORQUE RECEIVER-TRANSMITTER	080015	MIL-S-20708	GENERAL SPEC.
SYNCHRO, TORQUE TRANSMITTER	080012	MIL-S-20708	GENERAL SPEC.
SYNCHROS	080002	MIL-S-20708	GENERAL SPEC.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Government Documents.

2.1.1 Specifications and Standards. Unless otherwise specified, the following specifications and standards, of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-S-20708	Synchros, General Specification For

STANDARD

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-810	Environmental Test Methods and Engineering Guidelines

(Copies of specifications, standards, drawings, and publications, required by contractors in connection with specific procurement functions, should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Order of Precedence. In the event of conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Synchros.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare a SRS for Synchros, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Synchros.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions, described in DOD-STD-35, are applicable to Synchros.

4.3.2 Illustrations. Illustrations, applicable to Synchros, are contained in Appendix A to this document.

4.4 Units of Measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE Formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced Documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table II provides codes for column headings which may be used for Synchros characteristics. When different units of measure are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

TABLE II. TABULATION CANDIDATES

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1562	SYNCHRO SIZE	1568	PRIMARY VOLTAGE (VOLTS)	1586	NO. SPLINE TEETH
1590	TYPE				

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

5.5 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on a SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and it's associated code. Enter, on the SRS, the code and the characteristic value required. After the part's unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.5.1 Interrelationship of Codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The standard paragraph, of which the code is a part, is shown adjacent to the code on the right-hand page. When a characteristic value, entered with a code, becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact characteristic value entry, as supplied with the code, except for "X" entries.

5.5.2 Automatic MSE Data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without making additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.5.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in DOD-STD-35. Refer to DOD-STD-35 for general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*REQUESTER'S FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT.	0700
ONE SECTION DOCUMENT.	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6874	THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).
0107	
0108	0108. SCOPE.

SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.

PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.

PART NUMBER. THE PART NUMBER FOR THE ITEMS IS (THE SAME AS THE NUMBER OF THIS DOCUMENT) PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

6941	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.
6942	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ALTITUDE RATING	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5060
SEA LEVEL TO (METERS)	5061
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5062
SEA LEVEL TO (METERS)	5063
TEMPERATURE RATING	
MAXIMUM OPERATING (DEGREES CELSIUS)	5069
MAXIMUM STORAGE (DEGREES CELSIUS)	7302
MAXIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5054
MINIMUM OPERATING (DEGREES CELSIUS)	5068
MINIMUM STORAGE (DEGREES CELSIUS)	7301
MINIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5052
NOMINAL OPERATING (DEGREES CELSIUS)	5046

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ALTITUDE RATING.
5060	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5060 FEET.
5061	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5061 METERS.
5062	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5062 FEET.
5063	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5063 METERS.
	TEMPERATURE RATING.
5069	THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS.
7302	THE MAXIMUM STORAGE TEMPERATURE RATING SHALL BE 7302 DEGREES CELSIUS.
5054	THE MAXIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5054 DEGREES CELSIUS.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.
7301	THE MINIMUM STORAGE TEMPERATURE RATING SHALL BE 7301 DEGREES CELSIUS.
5052	THE MINIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5052 DEGREES CELSIUS.
5046	THE NOMINAL OPERATING TEMPERATURE RATING SHALL BE 5046 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NOMINAL STORAGE (DEGREES CELSIUS)	5048
CLASSIFICATION	
BASE DOCUMENT (TYPE)	1590
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
DIMENSION TABLE, (SEE TABLE III, DOD-STD-35)	
*UNITS (SELECT ONE)	
INCHES.	7572
MILLIMETERS.	7577
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950

NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
5048	THE NOMINAL STORAGE TEMPERATURE RATING SHALL BE 5048 DEGREES CELSIUS.
	CLASSIFICATION.
1590	TYPE. TYPE 1590 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	
MATERIALS (SEE TABLE VI, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VI IS USED.	
FINISHES (SEE TABLE VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
METALS	
DISSIMILAR METALS.	7580
DESIGN AND CONSTRUCTION	
SYNCHRO SIZE ____	1562
SUPPLY FREQUENCY (SELECT ONE)	
60 HERTZ.	1563
TOLERANCE (PERCENT)	1564

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.

FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

7580 METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.

DESIGN AND CONSTRUCTION

1562 SYNCHRO SIZE. SYNCHRO SIZE SHALL BE 1562.

1563 SUPPLY FREQUENCY. SUPPLY FREQUENCY SHALL BE 60 HERTZ.

1564 TOLERANCE SHALL BE PLUS OR MINUS 1564 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
400 HERTZ.	1565
TOLERANCE (PERCENT)	1566
PRIMARY VOLTAGE (VOLTS)	1568
TOLERANCE (PERCENT)	1569
DC ROTOR RESISTANCE (OHMS)	1580
DC STATOR RESISTANCE (OHMS)	1581
SHAFT SPLINE TEETH (NUMBER)	1586
ROTOR SHAFT HARDNESS (SELECT ONE)	
RANGE	
*(MINIMUM)	1587
*(MAXIMUM)	1588
(NOMINAL)	1589
THREADED PARTS	
SHAFT (DESIGNATION)	1593
*(SPECIFICATION)	1594
TERMINAL BLOCK (DESIGNATION)	1595
*(SPECIFICATION)	1596

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1565	SUPPLY FREQUENCY. SUPPLY FREQUENCY SHALL BE 400 HERTZ.
1566	TOLERANCE SHALL BE PLUS OR MINUS 1566 PERCENT.
1568	PRIMARY VOLTAGE. PRIMARY VOLTAGE SHALL BE 1568 VOLT(S).
1569	TOLERANCE SHALL BE PLUS OR MINUS 1569 PERCENT.
1580	DC ROTOR RESISTANCE. DC ROTOR RESISTANCE SHALL BE 1580 OHM(S).
1581	DC STATOR RESISTANCE. DC STATOR RESISTANCE SHALL BE 1581 OHM(S).
1586	SHAFT TEETH. NUMBER OF TEETH ON THE SPLINE SHALL BE 1586.
1587 1588	ROTOR SHAFT HARDNESS. HARDNESS SHALL BE EQUIVALENT TO A RANGE ON THE ROCKWELL C SCALE BETWEEN 1587 AND 1588.
1589	ROTOR SHAFT HARDNESS. HARDNESS SHALL BE EQUIVALENT TO 1589 ON THE ROCKWELL C SCALE.
	THREADED PARTS.
1593 1594	SHAFT THREADS SHALL BE 1593 IN ACCORDANCE WITH 1594.
1595 1596	TERMINAL BLOCK THREADS SHALL BE 1595 IN ACCORDANCE WITH 1596.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINALS (DESIGNATION)	1597
*(SPECIFICATION)	1598
SHAFT END HOUSING (DESIGNATION)	1599
*(SPECIFICATION)	1600
PERPENDICULARITY TIR (SELECT ONE)	
(INCHES)	1601
(MILLIMETERS)	2810
CONCENTRICITY TIR (SELECT ONE)	
(INCHES)	1602
(MILLIMETERS)	2820
RUNOUT TIR (SELECT ONE)	
(INCHES)	1603
(MILLIMETERS)	2830

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1597	TERMINAL THREADS SHALL BE 1597 IN ACCORDANCE WITH 1598.
1598	
1599	SHAFT END HOUSING THREADS SHALL BE 1599 IN ACCORDANCE WITH
1600	1600.
1601	PERPENDICULARITY. PERPENDICULARITY OF SYNCHRO SURFACES SHALL BE WITHIN 1601 INCH(S) TOTAL INDICATOR READING.
2810	PERPENDICULARITY. PERPENDICULARITY OF SYNCHRO SURFACES SHALL BE WITHIN 2810 MILLIMETER(S) TOTAL INDICATOR READING.
1602	CONCENTRICITY. CONCENTRICITY OF SYNCHRO SURFACES SHALL BE WITHIN 1602 INCH(S) TOTAL INDICATOR READING.
2820	CONCENTRICITY. CONCENTRICITY OF SYNCHRO SURFACES SHALL BE WITHIN 2820 MILLIMETER(S) TOTAL INDICATOR READING.
1603	RUNOUT. RUNOUT OF THE SYNCHRO ROTOR SHAFT SHALL BE NOT GREATER THAN 1603 INCH(S) TOTAL INDICATOR READING.
2830	RUNOUT. RUNOUT OF THE SYNCHRO ROTOR SHAFT SHALL BE NOT GREATER THAN 2830 MILLIMETER(S) TOTAL INDICATOR READING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WEIGHT/MASS	
MAXIMUM WEIGHT/MASS PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024
PERFORMANCE CHARACTERISTICS (SEE TABLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	
ACCELERATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6272
NO EVIDENCE OF PHYSICAL DAMAGE.	6273
REMAIN WITHIN SPECIFIED TOLERANCE.	6277

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7023	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).
7021	MAXIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	MAXIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).
	PERFORMANCE CHARACTERISTICS. PERFORMANCE CHARACTERISTICS SHALL BE AS SHOWN IN THE PERFORMANCE CHARACTERISTICS TABLE.
6272	ACCELERATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6272.
6273	ACCELERATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6277	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6250
PER MIL-STD-202, METHOD 212.	6251
*TEST CONDITION LETTER (SELECT ONE)	
TEST CONDITION LETTER A.	6226
*LEVEL (SELECT ONE)	
20 G'S.	4863
50 G'S.	4864
100 G'S.	4865
TEST CONDITION LETTER B.	6233
*LEVEL (SELECT ONE)	
10,000 G'S.	4868
20,000 G'S.	4892
DIRECTION (SELECT ONE)	
ONE DIRECTION.	1557
BOTH DIRECTIONS.	1558
TEST CONDITION LETTER C.	6239
*LEVEL (G'S)	4893

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6250	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6250.
6251	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 212 OF MIL-STD-202.
6226	TEST CONDITION LETTER A SHALL APPLY.
4863	THE TEST LEVEL SHALL BE 20 G'S.
4864	THE TEST LEVEL SHALL BE 50 G'S.
4865	THE TEST LEVEL SHALL BE 100 G'S.
6233	TEST CONDITION LETTER B SHALL APPLY.
4868	THE TEST LEVEL SHALL BE 10,000 G'S.
4892	THE TEST LEVEL SHALL BE 20,000 G'S.
1557	THE SPECIMEN SHALL BE ACCELERATED IN ONE DIRECTION ONLY.
1558	THE SPECIMEN SHALL BE ACCELERATED IN BOTH DIRECTIONS.
6239	TEST CONDITION LETTER C SHALL APPLY.
4893	THE TEST LEVEL SHALL BE 4893 G'S.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOUNTING (SELECT ONE)	
MOUNT BY ANY SUITABLE METHOD.	6263
MOUNT BY NORMAL METHOD.	6264
MOUNT PER DOCUMENT (DOC DES)	6265
PERCENT RATED LOAD APPLIED (PERCENT)	6210
ALTITUDE (HIGH TEMPERATURE)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2372
OPERATIONAL AT ALTITUDE AND TEMPERATURE.	2374
MAXIMUM BRUSH CONTACT RESISTANCE (OHMS)	2376
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2378
MAXIMUM TEMPERATURE RISE (DEGREES CELSIUS)	2380
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2352
PER MIL-S-20708.	2354
TEST TEMPERATURE (DEGREES CELSIUS)	2356

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6263	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
6264	MOUNTING SHALL BE BY THE NORMAL METHOD.
6265	MOUNTING SHALL BE IN ACCORDANCE WITH 6265.
6210	THE ELECTRICAL LOAD SHALL BE 6210 PERCENT OF THE RATED LOAD.
2372	ALTITUDE (HIGH TEMPERATURE). REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2372.
2374	ALTITUDE (HIGH TEMPERATURE). SYNCHROS SHALL BE CAPABLE OF OPERATION AT THE SPECIFIED ALTITUDE IN COMBINATION WITH THE SPECIFIED TEMPERATURE.
2376	AFTER TESTING, BRUSH CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2376 OHM(S).
2378	AFTER TESTING, INSULATION RESISTANCE SHALL BE NOT LESS THAN 2378 MEGOHM(S).
2380	AFTER TESTING, TEMPERATURE RISE SHALL BE NOT GREATER THAN 2380 DEGREE(S) CELSIUS.
2352	ALTITUDE (HIGH TEMPERATURE). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2352.
2354	ALTITUDE (HIGH TEMPERATURE). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-20708.
2356	TEST TEMPERATURE SHALL BE 2356 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DURATION AT TEMPERATURE (HOURS)	2360
TEST PRESSURE (SELECT ONE)	
(INCHES OF MERCURY)	2362
(KILOPASCALS)	2364
ALTITUDE (LOW TEMPERATURE)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2322
OPERATIONAL AT ALTITUDE AND TEMPERATURE.	2324
MAXIMUM BRUSH CONTACT RESISTANCE (OHMS)	2326
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2328
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2302
PER MIL-S-20708.	2304
TEST TEMPERATURE (DEGREES CELSIUS)	2306
DURATION AT TEMPERATURE (HOURS).	2310

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2360	TEMPERATURE SHALL BE MAINTAINED FOR NOT LESS THAN 2360 HOUR(S).
2362	PRESSURE SHALL BE REDUCED TO 2362 INCH(S) OF MERCURY.
2364	PRESSURE SHALL BE REDUCED TO 2364 KILOPASCAL(S).
2322	ALTITUDE (LOW TEMPERATURE). REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2322.
2324	ALTITUDE (LOW TEMPERATURE). SYNCHROS SHALL BE CAPABLE OF OPERATION AT THE ALTITUDE IN COMBINATION WITH THE SPECIFIED TEMPERATURE.
2326	AFTER TEST, BRUSH CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2326 OHM(S).
2328	AFTER TEST, INSULATION RESISTANCE SHALL BE NOT LESS THAN 2328 MEGOHM(S).
2302	ALTITUDE (LOW TEMPERATURE). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2302.
2304	ALTITUDE (LOW TEMPERATURE). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-20708.
2306	TEST TEMPERATURE SHALL BE 2306 DEGREES CELSIUS.
2310	TEMPERATURE SHALL BE MAINTAINED FOR NOT LESS THAN 2310 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST PRESSURE (SELECT ONE)	
(INCHES OF MERCURY)	2312
(KILOPASCALS)	2314
BRUSH CONTACT RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1638
MAXIMUM RESISTANCE VARIATION (OHMS)	1640
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1632
PER MIL-S-20708.	1634
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4908
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4906
MAXIMUM LEAKAGE (MILLIAMPERES)	4894

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2312	PRESSURE SHALL BE REDUCED TO 2312 INCH(S) OF MERCURY.
2314	PRESSURE SHALL BE REDUCED TO 2314 KILOPASCAL(S).
1638	BRUSH CONTACT RESISTANCE. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1638.
1640	BRUSH CONTACT RESISTANCE. VARIATION IN RESISTANCE SHALL BE NOT GREATER THAN PLUS OR MINUS 1640 OHM(S).
1632	BRUSH CONTACT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1632.
1634	BRUSH CONTACT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-20708.
4908	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4908.
4906	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4894	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4894 MILLIAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4884
PER MIL-STD-202, METHOD 301.	6300
*ALTITUDE PER MIL-STD-202, METHOD 105	
*TEST CONDITION (LETTER)	4886
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4885
(VOLTS, AC)	4849
POINTS OF VOLTAGE APPLICATION	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	6311
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	6312
BETWEEN MUTUALLY INSULATED PARTS.	6292
BETWEEN ALL INSULATED PARTS AND GROUND.	6293
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	6294

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4884	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4884.
6300	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.
4886	ALTITUDE SHALL BE IN ACCORDANCE WITH TEST CONDITION LETTER 4886 OF METHOD 105 OF MIL-STD-202.
4885	TEST VOLTAGE SHALL BE 4885 VOLTS, DC.
4849	TEST VOLTAGE SHALL BE 4849 VOLTS, AC.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
6311	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
6312	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
6292	BETWEEN MUTUALLY INSULATED PARTS.
6293	BETWEEN ALL INSULATED PARTS AND GROUND.
6294	BETWEEN CURRENT CARRYING PARTS AND THE CASE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4859
DURATION OF VOLTAGE APPLICATION (SECONDS)	4891
MOUNTING PER DOCUMENT (DOC DES)	6280
REGULATION OF TEST VOLTAGE (PERCENT)	6308
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4900
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4902
(MILLIAMPERES)	6310
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4874
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4856
MAXIMUM LEAKAGE (MILLIAMPERES)	4875

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4859	SPECIAL PREPARATION SHALL BE IN ACCORDANCE WITH 4859.
4891	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4891 SECOND(S).
6280	MOUNTING SHALL BE IN ACCORDANCE WITH 6280.
6308	REGULATION OF THE TEST VOLTAGE SHALL BE WITHIN 6308 PERCENT.
4900	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4900 KILOVOLTAMPERE(S).
4902	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4902 AMPERE(S).
6310	THE SURGE CURRENT SHALL BE NOT GREATER THAN 6310 MILLIAMPERE(S).
4874	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.
4856	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4875	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4875 MILLIAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4861
PER MIL-STD-202, METHOD 301.	4862
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4854
(VOLTS, AC)	4855
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	4842
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	4848
BETWEEN MUTUALLY INSULATED PARTS.	4844
BETWEEN ALL INSULATED PARTS AND GROUND.	4845
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	4846
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4850
DURATION OF VOLTAGE APPLICATION (SECONDS)	4867
MOUNTING PER DOCUMENT (DOS DES)	5000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4861	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861.
4862	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.
4854	TEST VOLTAGE SHALL BE 4854 VOLTS, DC.
4855	TEST VOLTAGE SHALL BE 4855 VOLTS, AC.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
4842	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
4848	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
4844	BETWEEN MUTUALLY INSULATED PARTS.
4845	BETWEEN ALL INSULATED PARTS AND GROUND.
4846	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
4850	SPECIAL PREPARATION OR CONDITIONS SHALL BE IN ACCORDANCE WITH 4850.
4867	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4867 SECOND(S).
5000	MOUNTING SHALL BE IN ACCORDANCE WITH 5000.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
REGULATION OF TEST VOLTAGE (PERCENT)	4869
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4870
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4717
(MILLIAMPERES)	4897
METHOD OF VOLTAGE CONNECTION PER DOCUMENT (DOC DES)	6267
ELECTRICAL ERROR	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1802
MAXIMUM ERROR (MINUTES)	1804
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1796
PER MIL-S-20708.	1797
METHODS (SELECT ONE)	
PROPORTIONAL VOLTAGE NULLING METHOD.	1798

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4869	REGULATION OF TEST VOLTAGE SHALL BE WITHIN 4869 PERCENT.
4870	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4870 KILOVOLTAMPERE(S).
4717	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4717 AMPERE(S).
4897	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4897 MILLIAMPERE(S).
6267	METHOD OF CONNECTION OF TEST VOLTAGE SHALL BE IN ACCORDANCE WITH 6267.
1802	ELECTRICAL ERROR. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1802.
1804	ELECTRICAL ERROR. ELECTRICAL ERROR SHALL BE NOT GREATER THAN 1804 MINUTE(S).
1796	ELECTRICAL ERROR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1796.
1797	ELECTRICAL ERROR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-20708.
1798	THE PROPORTIONAL VOLTAGE NULLING METHOD SHALL BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PROPORTIONAL VOLTAGE GRADIENT METHOD.	1799
ELECTRICAL ERROR COMPARISON METHOD.	1800
END PLAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1680
MAXIMUM END PLAY (INCHES)	1682
MAXIMUM END PLAY (MILLIMETERS)	1683
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1672
PER MIL-S-20708.	1674
TEST LOAD (SELECT ONE)	
(POUNDS)	1676
(OUNCES)	1677
(NEWTONS)	1678

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1799	THE PROPORTIONAL VOLTAGE GRADIENT METHOD SHALL BE USED.
1800	THE ELECTRICAL ERROR COMPARISON METHOD SHALL BE USED.
1680	END PLAY. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1680.
1682	END PLAY. END PLAY SHALL BE NOT GREATER THAN 1682 INCH(S).
1683	END PLAY. END PLAY SHALL BE NOT GREATER THAN 1683 MILLIMETER(S).
1672	END PLAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1672.
1674	END PLAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-20708.
1676	TEST LOAD SHALL BE 1676 POUND(S).
1677	TEST LOAD SHALL BE 1677 OUNCE(S).
1678	TEST LOAD SHALL BE 1678 NEWTON(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2721
CONTINUOUS OPERATION.	2722
AFTER TEST REQUIREMENTS	
MAXIMUM BRUSH CONTACT RESISTANCE (OHMS)	2724
MAXIMUM LEAKAGE CURRENT (MILLIAMPERES)	2726
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2728
MAXIMUM RADIAL PLAY (SELECT ONE)	
(INCHES)	2730
(MILLIMETERS)	2731
MAXIMUM END PLAY (SELECT ONE)	
(INCHES)	2732
(MILLIMETERS)	2733

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2721	ENDURANCE. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2721.
2722	ENDURANCE. SYNCHROS SHALL BE CAPABLE OF CONTINUOUS OPERATION.
2724	AFTER TEST, BRUSH CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2724 OHM(S).
2726	AFTER TEST, LEAKAGE CURRENT SHALL BE NOT GREATER THAN 2726 MILLIAMPERE(S).
2728	AFTER TEST, INSULATION RESISTANCE SHALL BE NOT LESS THAN 2728 MEGOHM(S).
2730	AFTER TEST, RADIAL PLAY SHALL BE NOT GREATER THAN 2730 INCH(S).
2731	AFTER TEST, RADIAL PLAY SHALL BE NOT GREATER THAN 2731 MILLIMETER(S).
2732	AFTER TEST, END PLAY SHALL BE NOT GREATER THAN 2732 INCH(S).
2733	AFTER TEST, END PLAY SHALL BE NOT GREATER THAN 2733 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM FRICTION TORQUE (SELECT ONE)	
(OUNCE-INCHES)	2734
(NEWTON METERS)	2735
MAXIMUM ELECTRICAL ERROR (MINUTES)	2736
MAXIMUM TOTAL NULL VOLTAGE (MILLIVOLTS)	2738
MAXIMUM FUNDAMENTAL NULL VOLTAGE (MILLIVOLTS)	2740
MAXIMUM RECEIVER ERROR (MINUTES)	2742
MAXIMUM SYCHRONIZING TIME AT 30 DEGREES (SECONDS)	2744
MAXIMUM SYCHRONIZING TIME AT 177 DEGREES (SECONDS)	2746
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2655
PER MIL-S-20708.	2656

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2734	AFTER TEST, FRICTION TORQUE SHALL BE NOT GREATER THAN 2734 OUNCE-INCH(S).
2735	AFTER TEST, FRICTION TORQUE SHALL BE NOT GREATER THAN 2735 NEWTON METER(S).
2736	AFTER TEST, ELECTRICAL ERROR SHALL BE NOT GREATER THAN 2736 MINUTE(S).
2738	AFTER TEST, TOTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 2738 MILLIVOLT(S).
2740	AFTER TEST, FUNDAMENTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 2740 MILLIVOLT(S).
2742	AFTER TEST, RECEIVER ERROR SHALL BE NOT GREATER THAN 2742 MINUTE(S).
2744	AFTER TEST, SYNCHRONIZING TIME AT 30 DEGREES SHALL BE NOT GREATER THAN 2744 SECOND(S).
2746	AFTER TEST, SYNCHRONIZING TIME AT 177 DEGREES SHALL BE NOT GREATER THAN 2746 SECOND(S).
2655	ENDURANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2655.
2656	ENDURANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-20708. THE ENDURANCE TEST TIME SCHEDULE SHALL BE AS SHOWN IN THE ENDURANCE TEST TIME SCHEDULE TABLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST TIME PER TABLE	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE STANDARD PARAGRAPH

ENDURANCE TEST TIME SCHEDULE TABLE

TIME		TEMPERATURE	
	TOLERANCE		TOLERANCE
(HOURS)	(PLUS OR MINUS)	(DEGREES C)	(PLUS OR MINUS)
4400	4401	4402	4403
4407	4408	4409	4410
4414	4415	4416	4417
4421	4422	4423	4424
4428	4429	4430	4431
4435	4436	4437	4438
4442	4443	4444	4445
4449	4450	4451	4452
4456	4457	4458	4459
4463	4464	4465	4466
4470	4471	4472	4473
4477	4478	4479	4480
4484	4485	4486	4487

ENDURANCE TEST TIME SCHEDULE TABLE (CONT.)

	ROTATION	
		TOLERANCE
POSITION	(RPM)	(PLUS TO MINUS)
4404	4405	4406
4411	4412	4413
4418	4419	4420
4425	4426	4427
4432	4433	4434
4439	4440	4441
4446	4447	4448
4453	4454	4455
4460	4461	4462
4467	4468	4469
4474	4475	4476
4481	4482	4483
4488	4489	4490

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
EXPLOSION PROOF	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2642
NO EXPLOSION.	2644
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2625
PER MIL-STD-202, METHOD 109.	2626
CHAMBER TEMPERATURE (DEGREES CELSIUS)	2627
ENERGIZING VOLTAGE (VOLTS)	2632
FRICTION TORQUE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1712
MAXIMUM (OUNCE-INCHES)	1714
MAXIMUM (NEWTON METERS)	1716
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1692

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2642	EXPLOSION PROOF. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2642.
2644	EXPLOSION PROOF. SYNCHROS SHALL BE CAPABLE OF OPERATION IN THE PRESENCE OF AN EXPLOSIVE-GASEOUS MIXTURE WITH AIR WITHOUT CAUSING AN EXPLOSION.
2625	EXPLOSION PROOF. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2625.
2626	EXPLOSION PROOF. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 109 OF MIL-STD-202.
2627	CHAMBER TEMPERATURE SHALL BE 2627 DEGREES CELSIUS.
2632	SYNCHROS SHALL BE ENERGIZED BY 2632 VOLT(S).
1712	FRICTION TORQUE. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1712.
1714	FRICTION TORQUE. TORQUE SHALL BE NOT GREATER THAN 1714 OUNCE-INCH(S).
1716	FRICTION TORQUE. TORQUE SHALL BE NOT GREATER THAN 1716 NEWTON METER(S).
1692	FRICTION TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1692.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PER MIL-S-20708.	1694
TEST LOAD (SELECT ONE)	
(OUNCES)	1696
(NEWTONS)	1697
TEST TEMPERATURE 1 (DEGREES CELSIUS)	1700
TEST TEMPERATURE 2 (DEGREES CELSIUS)	1702
TEST TEMPERATURE 3 (DEGREES CELSIUS)	1704
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4760
FUNGUS RESISTANT BY CERTIFICATION OR BY TEST.	4761
NO EVIDENCE OF FUNGUS GROWTH WHEN TESTED.	4762
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4754

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1694	FRICTION TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-20708.
1696	TEST LOAD SHALL BE 1696 OUNCE(S).
1697	TEST LOAD SHALL BE 1697 NEWTON(S).
1700	TEST TEMPERATURE 1 SHALL BE 1700 DEGREES CELSIUS.
1702	TEST TEMPERATURE 2 SHALL BE 1702 DEGREES CELSIUS.
1704	TEST TEMPERATURE 3 SHALL BE 1704 DEGREES CELSIUS.
4760	FUNGUS. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.
4761	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED, THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4762	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4754	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PER MIL-STD-810, METHOD 508.	4755
TEST PERIOD (DAYS)	4756
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4798
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	4799
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1477
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	4805
AFTER TEST REQUIREMENTS	
MAXIMUM BRUSH CONTACT RESISTANCE (OHMS)	2840
MAXIMUM LEAKAGE CURRENT (MILLIAMPERES)	2842
MAXIMUM FUNDAMENTAL NULL VOLTAGE (MILLIVOLTS)	2844
MAXIMUM TOTAL NULL VOLTAGE (MILLIVOLTS)	2846

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4755	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.
4756	TEST PERIOD SHALL BE 4756 DAY(S).
4798	HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.
4799	HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
1477	THERE SHALL BE NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DIELECTRIC WITHSTANDING VOLTAGE IS PERFORMED.
4805	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4805 MEGOHM(S) AFTER DRYING.
2840	AFTER TEST, BRUSH CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2840 OHM(S).
2842	AFTER TEST, LEAKAGE CURRENT SHALL BE NOT GREATER THAN 2842 MILLIAMPERE(S).
2844	AFTER TEST, FUNDAMENTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 2844 MILLIVOLT(S).
2846	AFTER TEST, TOTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 2846 MILLIVOLT(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM RECEIVER ERROR (MINUTES)	2848
MAXIMUM SYNCHRONIZING TIME, 30 DEGREES (SECONDS)	2850
MAXIMUM SYNCHRONIZING TIME, 177 DEGREES (SECONDS)	2852
MAXIMUM RADIAL PLAY (SELECT ONE)	
(INCHES)	2854
(MILLIMETERS)	2856
MAXIMUM END PLAY (SELECT ONE)	
(INCHES)	2858
(MILLIMETERS)	2860
MAXIMUM FRICTION TORQUE (SELECT ONE)	
(OUNCE-INCHES)	2862
(NEWTON METERS)	2864
MAXIMUM ELECTRICAL ERROR (MINUTES)	2866

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2848	AFTER TEST, RECEIVER ERROR SHALL BE NOT GREATER THAN 2848 MINUTE(S).
2850	AFTER TEST, SYNCHRONIZING TIME AT 30 DEGREES SHALL BE NOT GREATER THAN 2850 SECOND(S).
2852	AFTER TEST, SYNCHRONIZING TIME AT 177 DEGREES SHALL BE NOT GREATER THAN 2852 SECOND(S).
2854	AFTER TEST, RADIAL PLAY SHALL BE NOT GREATER THAN 2854 INCH(S).
2856	AFTER TEST, RADIAL PLAY SHALL BE NOT GREATER THAN 2856 MILLIMETER(S).
2858	AFTER TEST, END PLAY SHALL BE NOT GREATER THAN 2858 INCH(S).
2860	AFTER TEST, END PLAY SHALL BE NOT GREATER THAN 2860 MILLIMETER(S).
2862	AFTER TEST, FRICTION TORQUE SHALL BE NOT GREATER THAN 2862 OUNCE-INCH(S).
2864	AFTER TEST, FRICTION TORQUE SHALL BE NOT GREATER THAN 2864 NEWTON METER(S).
2866	AFTER TEST, ELECTRICAL ERROR SHALL BE NOT GREATER THAN 2866 MINUTE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4788
PER MIL-STD-202, METHOD 103.	4853
*TEST CONDITION (LETTER)	4890
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	6206
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1380
AS FOLLOWS:	6359
*MINIMUM INSULATION RESISTANCE (SELECT ONE)	
SINGLE TEST	
(MEGOHMS)	1386
MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	1384
*SECOND TEST (MEGOHMS)	1387

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4788	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.
4853	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 103 OF MIL-STD-202.
4890	TEST CONDITION LETTER 4890 SHALL APPLY.
6206	DIELECTRIC WITHSTANDING VOLTAGE TEST SHALL BE PERFORMED AFTER DRYING.
1380	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.
6359	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1386	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1386 MEGOHM(S).
1384	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1384 MEGOHM(S) AT THE FIRST TEST TEMPERATURE.
1387	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1387 MEGOHM(S) AT THE SECOND TEST TEMPERATURE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
REMAIN WITHIN SPECIFIED TOLERANCE.	1388
NO EVIDENCE OF PHYSICAL DAMAGE.	1407
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1371
PER MIL-STD-202, METHOD 302.	1511
*CONDITION (SELECT ONE)	
TEST CONDITION (LETTER)	1378
TEST VOLTAGE (VOLTS, DC).	1373
ELECTRIFICATION TIME (SECONDS)	1376
MAXIMUM MEASUREMENT ERROR AT REQUIRED VALUE (PERCENT)	1377
POINTS OF MEASUREMENT	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	1497
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	1498
BETWEEN MUTUALLY INSULATED PARTS.	1522
BETWEEN INSULATED PARTS AND GROUND.	1523
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	1524

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1388	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1407	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1371	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.
1511	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 302 OF MIL-STD-202.
1378	TEST CONDITION LETTER 1378 SHALL APPLY.
1373	TEST POTENTIAL SHALL BE 1373 VOLTS, DC.
1376	ELECTRIFICATION DURATION SHALL BE 1376 SECOND(S).
1377	MEASUREMENT ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1377 PERCENT.
	POINTS OF INSULATION RESISTANCE MEASUREMENT SHALL BE AS FOLLOWS:
1497	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
1498	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
1522	BETWEEN MUTUALLY INSULATED PARTS.
1523	BETWEEN ALL INSULATED PARTS AND GROUND.
1524	BETWEEN CURRENT CARRYING PARTS AND THE CASE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SPECIAL PREPARATIONS OR CONDITIONS FOR DOCUMENT (DOC DES)	1520
FIRST TEST TEMPERATURE (DEGREES CELSIUS)	1372
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	1381
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1383
MOISTURE RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1400
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	1396
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1394
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	1429
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	1404
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	1432
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	1406

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1520	SPECIAL PREPARATIONS OR CONDITIONS SHALL BE IN ACCORDANCE WITH 1520.
1372	FIRST TEST TEMPERATURE SHALL BE 1372 DEGREES CELSIUS.
1381	SECOND TEST TEMPERATURE SHALL BE 1381 DEGREES CELSIUS.
1383	TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1383 DEGREES CELSIUS.
1400	MOISTURE RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1400.
1396	MOISTURE RESISTANCE. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
1394	THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING OR INSULATION BREAKDOWN, WHEN DIELECTRIC WITHSTANDING VOLTAGE IS APPLIED.
1429	CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1429 MILLIAMPERE(S) AT HIGH HUMIDITY.
1404	CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1404 MILLIAMPERE(S) AFTER DRYING.
1432	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1432 MEGOHM(S) AT HIGH HUMIDITY.
1406	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1406 MEGOHM(S) AFTER DRYING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
AFTER DRYING REQUIREMENTS	
MAXIMUM BRUSH CONTACT RESISTANCE (OHMS)	2900
MAXIMUM FRICTION TORQUE (SELECT ONE)	
(OUNCE-INCHES)	2902
(NEWTON METERS)	2904
MAXIMUM ELECTRICAL ERROR (MINUTES)	2906
MAXIMUM RECEIVER ERROR (MINUTES)	2908
MAXIMUM SYCHRONIZING TIME, 30 DEGREES (SECONDS)	2910
MAXIMUM SYNCHRONIZING TIME, 177 DEGREES (SECONDS)	2912
MAXIMUM TOTAL NULL VOLTAGE (MILLIVOLTS)	2914
MAXIMUM FUNDAMENTAL NULL VOLTAGE (MILLIVOLTS)	2916
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1391
PER MIL-STD-202, METHOD 106.	1397

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2900	AFTER THE DRYING PERIOD, THE BRUSH CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2900 OHM(S).
2902	AFTER THE DRYING PERIOD, THE FRICTION TORQUE SHALL BE NOT GREATER THAN 2902 OUNCE-INCH(S).
2904	AFTER THE DRYING PERIOD, THE FRICTION TORQUE SHALL BE NOT GREATER THAN 2904 NEWTON METER(S).
2906	AFTER THE DRYING PERIOD, THE ELECTRICAL ERROR SHALL BE NOT GREATER THAN 2906 MINUTE(S).
2908	AFTER THE DRYING PERIOD, THE RECEIVER ERROR SHALL BE NOT GREATER THAN 2908 MINUTE(S).
2910	AFTER THE DRYING PERIOD, SYNCHRONIZING TIME AT 30 DEGREES SHALL BE NOT GREATER THAN 2910 SECOND(S).
2912	AFTER THE DRYING PERIOD, SYNCHRONIZING TIME AT 177 DEGREES SHALL BE NOT GREATER THAN 2912 SECOND(S).
2914	AFTER THE DRYING PERIOD, THE TOTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 2914 MILLIVOLT(S).
2916	AFTER THE DRYING PERIOD, THE FUNDAMENTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 2916 MILLIVOLT(S).
1391	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1391.
1397	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 106 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LOADING VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4981
(VOLTS, AC)	4980
STEP 7A NOT APPLICABLE.	4985
STEP 7B NOT APPLICABLE.	4986
MOUNT PER DOCUMENT (DOC DES)	1449
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	4983
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	4984
NULL VOLTAGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ___	1822
AS FOLLOWS:	1823
MAXIMUM TOTAL NULL VOLTAGE (MILLIVOLTS)	1824
MAXIMUM FUNDAMENTAL NULL VOLTAGE (MILLIVOLTS)	1825
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1812

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4981	LOADING VOLTAGE SHALL BE 4981 VOLTS, DC.
4980	LOADING VOLTAGE SHALL BE 4980 VOLTS, AC.
4985	STEP 7A OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
4986	STEP 7B OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
1449	MOUNTING SHALL BE IN ACCORDANCE WITH 1449.
4983	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.
4984	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.
1822	NULL VOLTAGE. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1822.
1823	NULL VOLTAGE. REQUIREMENTS SHALL BE AS FOLLOWS:
1824	TOTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 1824 MILLIVOLT(S).
1825	FUNDAMENTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 1825 MILLIVOLT(S).
1812	NULL VOLTAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1812.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PER MIL-S-20708.	1814
METHODS (SELECT ONE)	
FREQUENCY SENSITIVE VOLTMETER METHOD.	1815
PHASE-SENSITIVE VOLTMETER METHOD.	1816
PHASE SHIFT	
REQUIREMENTS (SELECT ONE)	
TEST BASE DOCUMENT EXCEPT ____	1784
PHASE SHIFT (DEGREES)	1786
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1778
PER MIL-S-20708.	1780
PRIMARY CURRENT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1724
MAXIMUM CURRENT (MILLIAMPERES)	1726
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1718

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1814	NULL VOLTAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-20708.
1815	THE FREQUENCY-SENSITIVE VOLTMETER METHOD SHALL BE USED.
1816	THE PHASE-SENSITIVE VOLTMETER METHOD SHALL BE USED.
1784	PHASE SHIFT. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1784.
1786	PHASE SHIFT. PHASE SHIFT SHALL BE 1786 DEGREE(S).
1778	PHASE SHIFT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1778.
1780	PHASE SHIFT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-20708.
1724	PRIMARY CURRENT. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1724.
1726	PRIMARY CURRENT. PRIMARY CURRENT SHALL BE NOT GREATER THAN 1726 MILLIAMPERE(S).
1718	PRIMARY CURRENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1718.

Source: https://assist.dla.mil --.Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PER MIL-S-20708.	1720
PRIMARY POWER	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1746
PRIMARY POWER (WATTS)	1748
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1736
PER MIL-S-20708.	1738
RADIAL PLAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1660
MAXIMUM RADIAL PLAY (INCHES)	1662
MAXIMUM RADIAL PLAY (MILLIMETERS)	1664
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1652
PER MIL-S-20708.	1654

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1720	PRIMARY CURRENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-20708.
1746	PRIMARY POWER. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1746.
1748	PRIMARY POWER. PRIMARY POWER SHALL BE 1748 WATT(S).
1736	PRIMARY POWER. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1736.
1738	PRIMARY POWER. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-20708.
1660	RADIAL PLAY. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1660.
1662	RADIAL PLAY. RADIAL PLAY SHALL BE NOT GREATER THAN 1662 INCH(S) TOTAL INDICATOR READING.
1664	RADIAL PLAY. RADIAL PLAY SHALL BE NOT GREATER THAN 1664 MILLIMETER(S) TOTAL INDICATOR READING.
1652	RADIAL PLAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1652.
1654	RADIAL PLAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-20708.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST LOAD (SELECT ONE)	
(POUNDS)	1655
(NEWTONS)	1658
RADIO NOISE (RADIATED AND CONDUCTED)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2481
AS FOLLOWS:	2480
RADIATED NOISE, MICROVOLTS/METER/KILOHERTZ BANDWIDTH, PER MIL-S-20708.	2482
CONDUCTED NOISE, MICROVOLTS/KILOHERTZ BANDWIDTH, PER MIL-S-20708.	2483
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2463
PER MIL-S-20708.	2464
RADIATED NOISE FREQUENCY RANGE	
*LOW (MEGAHERTZ)	2465
*HIGH (MEGAHERTZ)	2466

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1655	TEST LOAD SHALL BE 1655 POUND(S).
1658	TEST LOAD SHALL BE 1658 NEWTON(S).
2481	RADIO NOISE (RADIATED AND CONDUCTED). REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2481.
2480	RADIO NOISE (RADIATED AND CONDUCTED). REQUIREMENTS SHALL BE AS FOLLOWS.
2482	MEASURED RADIATED RADIO NOISE, IN MICROVOLTS/METER/KHZ BANDWIDTH, SHALL BE IN ACCORDANCE WITH THE RADIO NOISE LIMITS OF MIL-S-20708.
2483	MEASURED RADIO NOISE CONDUCTED INTO THE SUPPLY LINE, IN MICROVOLTS/KHZ BANDWIDTH, SHALL BE IN ACCORDANCE WITH THE RADIO NOISE LIMITS OF MIL-S-20708.
2463	RADIO NOISE (RADIATED AND CONDUCTED). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2463.
2464	RADIO NOISE (RADIATED AND CONDUCTED). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-20708.
2465 2466	RADIATED RADIO NOISE SHALL BE MEASURED IN THE FREQUENCY RANGE OF 2465 TO 2466 MEGAHERTZ.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONDUCTED NOISE FREQUENCY RANGE	
*LOW (MEGAHERTZ)	2467
*HIGH (MEGAHERTZ)	2468
ENERGIZING VOLTAGE (VOLTS)	2471
TOLERANCE (PERCENT)	2472
ROTATION SPEED (RPM)	2469
RECEIVER ERROR	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1866
MAXIMUM RECEIVER ERROR (MINUTES)	1868
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1852
PER MIL-S-20708.	1851
METHOD 1.	1853
TEST TEMPERATURE (DEGREES CELSIUS)	1855
METHOD 2.	1854
TEST TEMPERATURE (DEGREES CELSIUS)	1857

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2467 2468	CONDUCTED RADIO NOISE SHALL BE MEASURED IN THE FREQUENCY RANGE OF 2467 TO 2468 MEGAHERTZ.
2471	SYNCHROS SHALL BE ENERGIZED BY 2471 VOLT(S).
2472	TOLERANCE SHALL BE PLUS OR MINUS 2472 PERCENT.
2469	THE ROTOR SHALL BE ROTATED AT 2469 REVOLUTIONS PER MINUTE.
1866	RECEIVER ERROR. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1866.
1868	RECEIVER ERROR. RECEIVER ERROR SHALL BE NOT GREATER THAN 1868 MINUTE(S).
1852	RECEIVER ERROR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1852.
1851	RECEIVER ERROR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-20708.
1853	METHOD 1 SHALL BE USED.
1855	TEST TEMPERATURE SHALL BE 1855 DEGREES CELSIUS.
1854	METHOD 2 SHALL BE USED.
1857	TEST TEMPERATURE SHALL BE 1857 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ROTOR OPEN CIRCUIT IMPEDANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2038
AS FOLLOWS:	2039
MINIMUM IMPEDANCE (OHMS)	2040
MAXIMUM IMPEDANCE (OHMS)	2042
IMPEDANCE ANGLE (DEGREES)	2044
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2026
PER MIL-S-20708.	2028
ROTOR SHORT CIRCUIT IMPEDANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2010
AS FOLLOWS:	2011
MINIMUM IMPEDANCE (OHMS)	2012

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2038	ROTOR OPEN CIRCUIT IMPEDANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2038.
2039	ROTOR OPEN CIRCUIT IMPEDANCE. THE IMPEDANCE SHALL BE AS FOLLOWS:
2040	THE IMPEDANCE SHALL BE NOT LESS THAN 2040 OHM(S).
2042	THE IMPEDANCE SHALL BE NOT GREATER THAN 2042 OHM(S).
2044	THE IMPEDANCE ANGLE SHALL BE 2044 DEGREE(S).
2026	ROTOR OPEN CIRCUIT IMPEDANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2026.
2028	ROTOR OPEN CIRCUIT IMPEDANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-20708.
2010	ROTOR SHORT CIRCUIT IMPEDANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2010.
2011	ROTOR SHORT CIRCUIT IMPEDANCE. THE IMPEDANCE SHALL BE AS FOLLOWS:
2012	THE IMPEDANCE SHALL BE NOT LESS THAN 2012 OHM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM IMPEDANCE (OHMS)	2014
IMPEDANCE ANGLE (DEGREES)	2016
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2002
PER MIL-S-20708.	2004
SALT SPRAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4878
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE.	4782
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4770
PER MIL-STD-202, METHOD 101.	4771
*TEST CONDITION (LETTER)	4772
MOUNTING (SELECT ONE)	
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4773

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2014	THE IMPEDANCE SHALL BE NOT GREATER THAN 2014 OHM(S).
2016	THE IMPEDANCE ANGLE SHALL BE 2016 DEGREE(S).
2002	ROTOR SHORT CIRCUIT IMPEDANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2002.
2004	ROTOR SHORT CIRCUIT IMPEDANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-20708.
4878	SALT SPRAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4878.
4782	SALT SPRAY. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
4770	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4770.
4771	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 101 OF MIL-STD-202.
4772	TEST CONDITION LETTER 4772 SHALL APPLY.
4773	MOUNTING SHALL BE IN ACCORDANCE WITH 4773.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOUNTING SHALL BE BY NORMAL METHOD.	4765
MOUNTING SHALL BE BY ANY SUITABLE METHOD.	4766
SHOCK, HIGH IMPACT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1494
NO EVIDENCE OF PHYSICAL DAMAGE.	1495
AFTER TEST REQUIREMENTS	
MAXIMUM BRUSH CONTACT RESISTANCE (OHMS)	2950
MAXIMUM ELECTRICAL ERROR (MINUTES)	2952
MAXIMUM TOTAL NULL VOLTAGE (MILLIVOLTS)	2954
MAXIMUM FUNDAMENTAL NULL VOLTAGE (MILLIVOLTS)	2956
MAXIMUM RECEIVER ERROR (MINUTES)	2958
MAXIMUM SYNCHRONIZING TIME, 30 DEGREES (SECONDS)	2960
MAXIMUM SYNCHRONIZING TIME, 177 DEGREES (SECONDS)	2962

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4765	MOUNTING SHALL BE BY THE NORMAL METHOD.
4766	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
1494	SHOCK, HIGH IMPACT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1494.
1495	SHOCK, HIGH IMPACT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2950	AFTER TESTING, BRUSH CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2950 OHM(S).
2952	AFTER TESTING, THE ELECTRICAL ERROR SHALL BE NOT GREATER THAN 2952 MINUTE(S).
2954	AFTER TESTING, THE TOTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 2954 MILLIVOLT(S).
2956	AFTER TESTING, THE FUNDAMENTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 2956 MILLIVOLT(S).
2958	AFTER TESTING, THE RECEIVER ERROR SHALL BE NOT GREATER THAN 2958 MINUTE(S).
2960	AFTER TESTING, THE SYNCHRONIZING TIME AT 30 DEGREES SHALL BE NOT GREATER THAN 2960 SECOND(S).
2962	AFTER TESTING, THE SYNCHRONIZING TIME AT 177 DEGREES SHALL BE NOT GREATER THAN 2962 SECOND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM RADIAL PLAY (SELECT ONE)	
(INCHES)	2964
(MILLIMETERS)	2966
MAXIMUM END PLAY (SELECT ONE)	
(INCHES)	2968
(MILLIMETERS)	2970
MAXIMUM FRICTION TORQUE (SELECT ONE)	
(OUNCE-INCHES)	2972
(NEWTON METERS)	2974
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1486
PER MIL-STD-202, METHOD 207.	1482
MOUNTING FIXTURE (SELECT ONE)	
FIGURE NUMBER FROM MIL-STD-202, METHOD 207 (NUMBER)	1488
ANY SUITABLE MOUNTING FIXTURE.	1478
MOUNTING FIXTURE PER DOCUMENT (DOC DES)	1468

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
2964	AFTER TESTING, THE RADIAL PLAY SHALL BE NOT GREATER THAN 2964 INCH(S).
2966	AFTER TESTING, THE RADIAL PLAY SHALL BE NOT GREATER THAN 2966 MILLIMETER(S).
2968	AFTER TESTING, THE END PLAY SHALL BE NOT GREATER THAN 2968 INCH(S).
2970	AFTER TESTING, THE END PLAY SHALL BE NOT GREATER THAN 2970 MILLIMETER(S).
2972	AFTER TESTING, FRICTION TORQUE SHALL BE NOT GREATER THAN 2972 OUNCE-INCH(S).
2974	AFTER TESTING, FRICTION TORQUE SHALL BE NOT GREATER THAN 2974 NEWTON METER(S).
1486	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1486.
1482	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 207 OF MIL-STD-202.
1488	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH FIGURE 1488 OF METHOD 207 OF MIL-STD-202.
1478	THE MOUNTING FIXTURE SHALL BE ANY SUITABLE MOUNTING FIXTURE.
1468	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH 1468.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, SPECIFIED PULSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1508
NO EVIDENCE OF PHYSICAL DAMAGE.	1509
AFTER TESTING REQUIREMENTS	
MAXIMUM BRUSH CONTACT RESISTANCE (OHMS)	2154
MAXIMUM FUNDAMENTAL NULL VOLTAGE (MILLIVOLTS)	2158
MAXIMUM TOTAL NULL VOLTAGE (MILLIVOLTS)	2160
MAXIMUM RECEIVER ERROR (MINUTES)	2162
MAXIMUM SYCHRONIZING TIME, 30 DEGREES (SECONDS)	2164
MAXIMUM SYNCHRONIZING TIME, 177 DEGREES (SECONDS)	2166
MAXIMUM RADIAL PLAY (SELECT ONE)	
(INCHES)	2170
(MILLIMETERS)	2171

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1508	SHOCK, SPECIFIED PULSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT; EXCEPT 1508.
1509	SHOCK, SPECIFIED PULSE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2154	AFTER TEST, BRUSH CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2154 OHM(S).
2158	AFTER TEST, FUNDAMENTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 2158 MILLIVOLT(S).
2160	AFTER TEST, TOTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 2160 MILLIVOLT(S).
2162	AFTER TEST, RECEIVER ERROR SHALL BE NOT GREATER THAN 2162 MINUTE(S).
2164	AFTER TEST, SYNCHRONIZING TIME AT 30 DEGREES SHALL BE NOT GREATER THAN 2164 SECOND(S).
2166	AFTER TEST, SYNCHRONIZING TIME AT 177 DEGREES SHALL NOT BE GREATER THAN 2166 SECOND(S).
2170	AFTER TEST, RADIAL PLAY SHALL BE NOT GREATER THAN 2170 INCH(S).
2171	AFTER TEST, RADIAL PLAY SHALL BE NOT GREATER THAN 2171 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM END PLAY (SELECT ONE)	
(INCHES)	2172
(MILLIMETERS)	2175
MAXIMUM FRICTION TORQUE (SELECT ONE)	
(INCHES)	2173
(MILLIMETERS)	2176
MAXIMUM ELECTRICAL ERROR (MINUTES)	2174
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1502
PER MIL-STD-202, METHOD 213.	1500
TEST CONDITION (LETTER)	1504
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	4686
NORMAL MOUNTING METHOD.	4685
MOUNT PER DOCUMENT (DOC DES)	4684

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2172	AFTER TEST, END PLAY SHALL BE NOT GREATER THAN 2172 INCH(S).
2175	AFTER TEST, END PLAY SHALL BE NOT GREATER THAN 2175 MILLIMETER(S).
2173	AFTER TEST, FRICTION TORQUE SHALL BE NOT GREATER THAN 2173 OUNCE-INCH(S).
2176	AFTER TEST, FRICTION TORQUE SHALL BE NOT GREATER THAN 2176 NEWTON METER(S).
2174	AFTER TEST, ELECTRICAL ERROR SHALL BE NOT GREATER THAN 2174 MINUTE(S).
1502	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1502.
1500	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 213 OF MIL-STD-202.
1504	TEST CONDITION LETTER 1504 SHALL APPLY.
4686	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4685	MOUNTING SHALL BE BY THE NORMAL METHOD.
4684	MOUNTING SHALL BE IN ACCORDANCE WITH 4684.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SPINNING (RECEIVERS AND DIFFERENTIAL RECEIVERS)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1942
SYCHRONIZE OR STOP WITHOUT SPINNING.	1944
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1922
PER MIL-S-20708.	1924
ROTOR DISPLACEMENT FROM SYNCHRO ZERO (DEGREES)	1926
ENERGIZE (PERCENT OF PRIMARY VOLTAGE)	1930
STATOR OPEN CIRCUIT IMPEDANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2092

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1942	SPINNING (RECEIVERS AND DIFFERENTIAL RECEIVERS). REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1942.
1944	SPINNING (RECEIVERS AND DIFFERENTIAL RECEIVERS). ROTORS SHALL SYNCHRONIZE OR COME TO REST FROM ANY INITIAL ANGULAR POSITION WITHOUT SPINNING.
1922	SPINNING (RECEIVERS AND DIFFERENTIAL RECEIVERS). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1922.
1924	SPINNING (RECEIVERS AND DIFFERENTIAL RECEIVERS). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-20708.
1926	ROTOR DISPLACEMENT SHALL BE 1926 DEGREE(S) FROM SYNCHRO ZERO.
1930	SYNCHROS SHALL BE ENERGIZED WITH 1930 PERCENT OF PRIMARY VOLTAGE AT RATED FREQUENCY.
2092	STATOR OPEN CIRCUIT IMPEDANCE. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2092.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
AS FOLLOWS:	2093
MINIMUM IMPEDANCE (OHMS)	2094
MAXIMUM IMPEDANCE (OHMS)	2096
IMPEDANCE (OHMS)	2097
IMPEDANCE ANGLE (DEGREES)	2098
TEST METHOD (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2082
PER MIL-S-20708.	2084
STATOR OPEN CIRCUIT QUADRATURE IMPEDANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ___	2118
AS FOLLOWS:	2119
MINIMUM IMPEDANCE (OHMS)	2120
MAXIMUM IMPEDANCE (OHMS)	2122
IMPEDANCE (OHMS)	2123

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2093	STATOR OPEN CIRCUIT IMPEDANCE. IMPEDANCE SHALL BE AS FOLLOWS:
2094	IMPEDANCE SHALL BE NOT LESS THAN 2094 OHM(S).
2096	IMPEDANCE SHALL BE NOT GREATER THAN 2096 OHM(S).
2097	IMPEDANCE SHALL BE 2097 OHM(S).
2098	IMPEDANCE ANGLE SHALL BE 2098 DEGREE(S).
2082	STATOR OPEN CIRCUIT IMPEDANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2082.
2084	STATOR OPEN CIRCUIT IMPEDANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-20708.
2118	STATOR OPEN CIRCUIT QUADRATURE IMPEDANCE. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2118.
2119	STATOR OPEN CIRCUIT QUADRATURE IMPEDANCE. IMPEDANCE SHALL BE AS FOLLOWS:
2120	IMPEDANCE SHALL BE NOT LESS THAN 2120 OHM(S).
2122	IMPEDANCE SHALL BE NOT GREATER THAN 2122 OHM(S).
2123	IMPEDANCE SHALL BE 2123 OHM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2108
PER MIL-S-20708.	2110
STATOR SHORT CIRCUIT IMPEDANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2066
AS FOLLOWS:	2067
IMPEDANCE (OHMS)	2071
MINIMUM IMPEDANCE (OHMS)	2068
MAXIMUM IMPEDANCE (OHMS)	2070
IMPEDANCE ANGLE (DEGREES)	2072
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2056
PER MIL-S-20708.	2058

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2108	STATOR OPEN CIRCUIT QUADRATURE IMPEDANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2108.
2110	STATOR OPEN CIRCUIT QUADRATURE IMPEDANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-20708.
2066	STATOR SHORT CIRCUIT IMPEDANCE. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2066.
2067	STATOR SHORT CIRCUIT IMPEDANCE. IMPEDANCE SHALL BE AS FOLLOWS:
2071	IMPEDANCE SHALL BE 2071 OHM(S).
2068	IMPEDANCE SHALL BE NOT LESS THAN 2068 OHM(S).
2070	IMPEDANCE SHALL BE NOT GREATER THAN 2070 OHM(S).
2072	THE IMPEDANCE ANGLE SHALL BE 2072 DEGREE(S).
2056	STATOR SHORT CIRCUIT IMPEDANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2056.
2058	STATOR SHORT CIRCUIT IMPEDANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-20708.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STRUCTUREBORNE NOISE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2531
MAXIMUM STRUCTUREBORNE NOISE (DECIBELS)	2532
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2521
PER MIL-STD-740.	2522
TEST FREQUENCY RANGE	
*LOW FREQUENCY (HERTZ)	2524
*HIGH FREQUENCY (HERTZ)	2525
SYNCHRONIZING TIME	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1908
AS FOLLOWS:	1909
30-DEGREE DISPLACEMENT MAXIMUM TIME TO SYNCHRO ZERO (SECONDS)	1910

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2531	STRUCTUREBORNE NOISE. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2531.
2532	STRUCTUREBORNE NOISE. STRUCTUREBORNE NOISE SHALL BE NOT GREATER THAN 2532 DECIBEL(S).
2521	STRUCTUREBORNE NOISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2521.
2522	STRUCTUREBORNE NOISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-740.
2524 2525	TEST FREQUENCY RANGE SHALL BE 2524 TO 2525 HERTZ.
1908	SYNCHRONIZING TIME. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1908.
1909	SYNCHRONIZING TIME. REQUIREMENT(S) SHALL BE AS FOLLOWS:
1910	TIME TO RETURN TO SYNCHRO ZERO SHALL BE NOT GREATER THAN 1910 SECOND(S) FOR A DISPLACEMENT OF 30, PLUS OR MINUS 2 DEGREE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
177-DEGREE DISPLACEMENT MAXIMUM TIME TO SYNCHRO ZERO (SECONDS)	1911
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1878
PER MIL-S-20708.	1880
TEMPERATURE HIGH (AMBIENT AND OPERATIONAL)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2266
NO EVIDENCE OF PHYSICAL DAMAGE OR PERFORMANCE DEGRADATION.	2268
AFTER TEST REQUIREMENTS	
MAXIMUM BRUSH CONTACT RESISTANCE (OHMS)	2270
MAXIMUM ELECTRICAL ERROR (MINUTES)	2272
MAXIMUM TOTAL NULL VOLTAGE (MILLIVOLTS)	2274

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1911	TIME TO RETURN TO SYNCHRO ZERO SHALL BE NOT GREATER THAN 1911 SECOND(S) FOR A DISPLACEMENT OF 177, PLUS OR MINUS 2 DEGREE(S).
1878	SYNCHRONIZING TIME (RECEIVERS AND DIFFERENTIAL RECEIVERS). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1878.
1880	SYNCHRONIZING TIME (RECEIVERS AND DIFFERENTIAL RECEIVERS). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-20708.
2266	TEMPERATURE, HIGH (AMBIENT AND OPERATIONAL). REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2266.
2268	TEMPERATURE, HIGH (AMBIENT AND OPERATIONAL). SYNCHROS SHALL SHOW NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
2270	AFTER TEST, BRUSH CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2270 OHM(S).
2272	AFTER TEST, ELECTRICAL ERROR SHALL BE NOT GREATER THAN 2272 MINUTE(S).
2274	AFTER TEST, TOTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 2274 MILLIVOLT(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM FUNDAMENTAL NULL VOLTAGE (MILLIVOLTS)	2276
MAXIMUM RECEIVER ERROR (MINUTES)	2278
MAXIMUM SYCHRONIZING TIME, 30 DEGREES (MINUTES)	2280
MAXIMUM SYCHRONIZING TIME, 177 DEGREES (MINUTES)	2281
MAXIMUM FRICTION TORQUE (SELECT ONE)	
(OUNCE-INCHES)	2282
(NEWTON METERS)	2283
MAXIMUM LEAKAGE CURRENT (MILLIAMPERES)	2284
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2286
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2242
PER MIL-S-20708.	2244
INITIAL TEST TEMPERATURE (DEGREES CELSIUS)	2246
RAISE TO (DEGREES CELSIUS)	2252

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2276	AFTER TEST, FUNDAMENTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 2276 MILLIVOLT(S).
2278	AFTER TEST, RECEIVER ERROR SHALL BE NOT GREATER THAN 2278 MINUTE(S).
2280	AFTER TEST, SYNCHRONIZING TIME AT 30 DEGREES SHALL BE NOT GREATER THAN 2280 MINUTE(S).
2281	AFTER TEST, SYNCHRONIZING TIME AT 177 DEGREES SHALL BE NOT GREATER THAN 2281 SECOND(S).
2282	AFTER TEST, FRICTION TORQUE SHALL BE NOT GREATER THAN 2282 OUNCE-INCH(S).
2283	AFTER TEST, FRICTION TORQUE SHALL BE NOT GREATER THAN 2283 NEWTON METER(S).
2284	AFTER TEST, LEAKAGE CURRENT SHALL BE NOT GREATER THAN 2284 MILLIAMPERE(S).
2286	AFTER TEST, INSULATION RESISTANCE SHALL BE NOT LESS THAN 2286 MEGOHM(S).
2242	TEMPERATURE, HIGH (AMBIENT AND OPERATIONAL). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2242.
2244	TEMPERATURE, HIGH (AMBIENT AND OPERATIONAL). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-20708.
2246	INITIAL TEST TEMPERATURE SHALL BE 2246 DEGREES CELSIUS.
2252	TEMPERATURE SHALL BE RAISED TO 2252 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST DURATION (HOURS)	2256
TEMPERATURE LOW (AMBIENT AND OPERATIONAL)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2210
NO EVIDENCE OF PHYSICAL DAMAGE OR PERFORMANCE DEGRADATION.	2212
AFTER TEST REQUIREMENTS	
MAXIMUM BRUSH CONTACT RESISTANCE (OHMS)	2214
MAXIMUM LEAKAGE CURRENT (MILLIAMPERES)	2216
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2218
MAXIMUM ELECTRICAL ERROR (MINUTES)	2220
MAXIMUM TOTAL NULL VOLTAGE (MILLIVOLTS)	2222
MAXIMUM FUNDAMENTAL NULL VOLTAGE (MILLIVOLTS)	2224
MAXIMUM RECEIVER ERROR (MINUTES)	2226

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2256	DURATION OF TEST SHALL BE 2256 HOUR(S).
2210	TEMPERATURE, LOW (AMBIENT AND OPERATIONAL). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2210.
2212	TEMPERATURE, LOW (AMBIENT AND OPERATIONAL). THE SYNCHROS SHALL SHOW NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
2214	AFTER TEST, BRUSH CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2214 OHM(S).
2216	AFTER TEST, LEAKAGE CURRENT SHALL BE NOT GREATER THAN 2216 MILLIAMPERE(S).
2218	AFTER TEST, INSULATION RESISTANCE SHALL BE NOT LESS THAN 2218 MEGOHM(S).
2220	AFTER TEST, ELECTRICAL ERROR SHALL BE NOT GREATER THAN 2220 MINUTE(S).
2222	AFTER TEST, TOTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 2222 MILLIVOLT(S).
2224	AFTER TEST, FUNDAMENTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 2224 MILLIVOLT(S).
2226	AFTER TEST, RECEIVER ERROR SHALL BE NOT GREATER THAN 2226 MINUTE(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currenversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM SYNCHRONIZING TIME, 30 DEGREES (SECONDS)	2228
MAXIMUM SYNCHRONIZING TIME, 177 DEGREES (SECONDS)	2229
MAXIMUM FRICTION TORQUE (SELECT ONE)	
(OUNCE-INCHES)	2230
(NEWTON METERS)	2232
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2192
PER MIL-S-20708.	2194
INITIAL TEST TEMPERATURE (DEGREES CELSIUS)	2196
MINIMUM TEST DURATION (HOURS)	2200
RAISE TO (DEGREES CELSIUS)	2202
TEMPERATURE RISE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2421
MAXIMUM TEMPERATURE RISE (DEGREES CELSIUS)	2422

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2228	AFTER TEST, SYNCHRONIZING TIME AT 30 DEGREES SHALL BE NOT GREATER THAN 2228 SECOND(S).
2229	AFTER TEST, SYNCHRONIZING TIME AT 177 DEGREES SHALL BE NOT GREATER THAN 2229 SECOND(S).
2230	AFTER TEST, FRICTION TORQUE SHALL BE NOT GREATER THAN 2230 OUNCE-INCH(S).
2232	AFTER TEST, FRICTION TORQUE SHALL BE NOT GREATER THAN 2232 NEWTON METER(S).
2192	TEMPERATURE, LOW (AMBIENT AND OPERATIONAL). TESTING SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2192.
2194	TEMPERATURE, LOW (AMBIENT AND OPERATIONAL). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-20708.
2196	INITIAL TEST TEMPERATURE SHALL BE 2196 DEGREES CELSIUS.
2200	DURATION OF TEST SHALL BE NOT LESS THAN 2200 HOUR(S).
2202	TEMPERATURE SHALL BE RAISED TO 2202 DEGREES CELSIUS.
2421	TEMPERATURE RISE. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2421.
2422	TEMPERATURE RISE. TEMPERATURE RISE OF THE SYNCHRO SHALL BE NOT GREATER THAN 2422 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2401
PER MIL-S-20708.	2402
ENCLOSURE DURATION (HOURS)	2412
TERMINAL STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1418
NO EVIDENCE OF PHYSICAL DAMAGE.	1433
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1410
PER MIL-STD-202, METHOD 211.	1375
*TEST CONDITIONS	
TEST CONDITION A, APPLIED FORCE (SELECT ONE)	
(POUNDS)	1411
(NEWTONS)	1419

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2401	TEMPERATURE RISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2401.
2402	TEMPERATURE RISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-20708.
2412	PERIOD OF ENCLOSURE SHALL BE 2412 HOUR(S).
1418	TERMINAL STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1418.
1433	TERMINAL STRENGTH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1410	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1410.
1375	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 211 OF MIL-STD-202.
1411	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1411 POUND(S).
1419	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1419 NEWTON(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST CONDITION B, BENDS (NUMBER)	1412
TEST CONDITION C, LOAD (SELECT ONE)	
(POUNDS)	1413
(KILOGRAMS)	1420
TEST CONDITION D.	1414
TEST CONDITION E, TORQUE (SELECT ONE)	
(POUND-INCHES)	1416
(NEWTON METERS)	1421
THERMAL SHOCK (TEMPERATURE CYCLING)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ___	4722
NO EVIDENCE OF PHYSICAL DAMAGE.	4723
AFTER TEST REQUIREMENTS	
MINIMUM INSULATION RESISTANCE (MEGOHMS)	4728
NO EVIDENCE OF DIELECTRIC BREAKDOWN.	2798

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1412	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION B. THERE SHALL BE 1412 BEND(S).
1413	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1413 POUND(S).
1420	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1420 KILOGRAM(S).
1414	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION D.
1416	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1416 POUND-INCH(S).
1421	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1421 NEWTON METER(S).
4722	THERMAL SHOCK (TEMPERATURE CYCLING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4722.
4723	THERMAL SHOCK (TEMPERATURE CYCLING). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4728	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 4728 MEGOHMS.
2798	THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING OR INSULATION BREAKDOWN.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM LEAKAGE CURRENT (MILLIAMPERES)	6363
MAXIMUM BRUSH CONTACT RESISTANCE (OHMS)	2800
MAXIMUM FUNDAMENTAL NULL VOLTAGE (MILLIVOLTS)	2802
MAXIMUM TOTAL NULL VOLTAGE (MILLIVOLTS)	2804
MAXIMUM RECEIVER ERROR (MINUTES)	2806
MAXIMUM SYNCHRONIZING TIME, 30 DEGREES (SECONDS)	2808
MAXIMUM SYNCHRONIZING TIME, 177 DEGREES (SECONDS)	2811
MAXIMUM RADIAL PLAY (SELECT ONE)	
(INCHES)	2812
(MILLIMETERS)	2814
MAXIMUM END PLAY (SELECT ONE)	
(INCHES)	2816
(MILLIMETERS)	2818

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6363	AFTER TEST, LEAKAGE SHALL BE NOT GREATER THAN 6363 MILLIAMPERES.
2800	AFTER TEST, BRUSH CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2800 OHM(S).
2802	AFTER TEST, FUNDAMENTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 2802 MILLIVOLT(S).
2804	AFTER TEST, TOTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 2804 MILLIVOLT(S).
2806	AFTER TEST, RECEIVER ERROR SHALL BE NOT GREATER THAN 2806 MINUTE(S).
2808	AFTER TEST, SYNCHRONIZING TIME AT 30 DEGREES SHALL BE NOT GREATER THAN 2808 SECOND(S).
2811	AFTER TEST, SYNCHRONIZING TIME AT 177 DEGREES SHALL BE NOT GREATER THAN 2811 SECOND(S).
2812	AFTER TEST, RADIAL PLAY SHALL BE NOT GREATER THAN 2812 INCH(S).
2814	AFTER TEST, RADIAL PLAY SHALL BE NOT GREATER THAN 2814 MILLIMETER(S).
2816	AFTER TEST, END PLAY SHALL BE NOT GREATER THAN 2816 INCH(S).
2818	AFTER TEST, END PLAY SHALL BE NOT GREATER THAN 2818 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM FRICTION TORQUE (SELECT ONE)	
(OUNCE-INCHES)	2821
(NEWTON METERS)	2822
MAXIMUM ELECTRICAL ERROR (MINUTES)	2824
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4713
PER MIL-STD-202, METHOD 107.	4714
*TEST CONDITION (LETTER)	4715
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4719
TORQUE GRADIENT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2451
AS FOLLOWS:	2450

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2821	AFTER TEST, FRICTION TORQUE SHALL BE NOT GREATER THAN 2821 OUNCE-INCH(S).
2822	AFTER TEST, FRICTION TORQUE SHALL BE NOT GREATER THAN 2822 NEWTON METER(S).
2824	AFTER TEST, ELECTRICAL ERROR SHALL BE NOT GREATER THAN 2824 MINUTE(S).
4713	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4713.
4714	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 107 OF MIL-STD-202.
4715	TEST CONDITON LETTER 4715 SHALL APPLY.
4719	MOUNTING SHALL BE IN ACCORDANCE WITH 4719.
2451	TORQUE GRADIENT. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2451.
2450	TORQUE GRADIENT. TORQUE GRADIENT SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MINIMUM GRADIENT (SELECT ONE)	
(OUNCE-INCHES/DEGREE OF DEFLECTION)	2452
(NEWTON METERS/DEGREE OF DEFLECTION)	2453
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ___	2431
PER MIL-S-20708.	2432
DEFLECTIONS AS FOLLOWS	
DEFLECTION ONE (DEGREES)	2433
DEFLECTION TWO (DEGREES)	2434
DEFLECTION THREE (DEGREES)	2436
DEFLECTION FOUR (DEGREES)	2437
DEFLECTION FIVE (DEGREES)	2438
TRANSFORMATION RATIO	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1764

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
2452	GRADIENT SHALL BE NOT LESS THAN 2452 OUNCE-INCH(S) PER DEGREE OF DEFLECTION.
2453	GRADIENT SHALL BE NOT LESS THAN 2453 NEWTON METER(S) PER DEGREE OF DEFLECTION.
2431	TORQUE GRADIENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2431.
2432	TORQUE GRADIENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-20708.
	PREDETERMINED WEIGHTS OF EQUAL INCREMENTS SHALL BE APPLIED TO CAUSE DEFLECTIONS AS FOLLOWS:
2433	DEFLECTION ONE OF 2433 DEGREES.
2434	DEFLECTION TWO OF 2434 DEGREES.
2436	DEFLECTION THREE OF 2436 DEGREES.
2437	DEFLECTION FOUR OF 2437 DEGREES.
2438	DEFLECTION FIVE OF 2438 DEGREES.
1764	TRANSFORMATION RATIO. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1764.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
(TRANSFORMATION RATIO)	1766
TOLERANCE (PERCENT)	1768
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1758
PER MIL-S-20708.	1760
VARIATION OF VOLTAGE AND FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1986
OPERATE SUBJECT TO VOLTAGE AND FREQUENCY VARIATION.	1988
MAXIMUM POWER DRAIN (WATTS)	1990
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1972
PER MIL-S-20708.	1974

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1766	TRANSFORMATION RATIO. TRANSFORMATION RADIO SHALL BE 1766.
1768	TOLERANCE SHALL BE PLUS OR MINUS 1768 PERCENT.
1758	TRANSFORMATION RATIO. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1758.
1760	TRANSFORMATION RATIO. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-20708.
1986	VARIATION OF VOLTAGE AND FREQUENCY. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1986.
1988	VARIATION OF VOLTAGE AND FREQUENCY. SYNCHROS SHALL BE CAPABLE OF OPERATING SATISFACTORILY FROM POWER SOURCES SUBJECT TO VOLTAGE REGULATION, IN COMBINATION WITH THE FREQUENCY VARIATION SPECIFIED.
1990	POWER DRAWN FROM THE ENERGIZING SOURCE SHALL BE NOT GREATER THAN 1990 WATT(S).
1972	VARIATION OF VOLTAGE AND FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1972.
1974	VARIATION OF VOLTAGE AND FREQUENCY. TESTING SHALL BE IN ACCORDANCE WITH MIL-S-20708.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VOLTAGE ADJUSTMENT (PERCENT)	1976
FREQUENCY ADJUSTMENT (PERCENT)	1978
VIBRATION, HIGH FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1455
NO EVIDENCE OF PHYSICAL DAMAGE.	1456
AFTER TEST REQUIREMENTS	
MINIMUM INSULATION RESISTANCE (MEGOHMS)	1461
NO EVIDENCE OF DIELECTRIC BREAKDOWN.	2829
MAXIMUM LEAKAGE CURRENT (MILLIAMPERES)	6364
MAXIMUM BRUSH CONTACT RESISTANCE (OHMS)	2831
MAXIMUM FUNDAMENTAL NULL VOLTAGE (MILLIVOLTS)	2832
MAXIMUM TOTAL NULL VOLTAGE (MILLIVOLTS)	2834
MAXIMUM RECEIVER ERROR (MINUTES)	2836

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1976	AFTER STABILIZATION, VOLTAGE SHALL BE ADJUSTED TO PLUS 1976 PERCENT OF THE STANDARD TEST VOLTAGE.
1978	AFTER STABILIZATION, FREQUENCY SHALL BE ADJUSTED TO MINUS 1978 PERCENT OF THE STANDARD TEST FREQUENCY.
1455	VIBRATION, HIGH FREQUENCY. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1455.
1456	VIBRATION, HIGH FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1461	AFTER TEST, INSULATION RESISTANCE SHALL BE NOT LESS THAN 1461 MEGOHMS.
2829	THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING OR INSULATION BREAKDOWN.
6364	AFTER TEST, LEAKAGE SHALL BE NOT GREATER THAN 6364 MILLIAMPERES.
2831	AFTER TEST, BRUSH CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2831 OHM(S).
2832	AFTER TEST, FUNDAMENTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 2832 MILLIVOLT(S).
2834	AFTER TEST, TOTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 2834 MILLIVOLT(S).
2836	AFTER TEST, RECEIVER ERROR SHALL BE NOT GREATER THAN 2836 MINUTE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM SYNCHRONIZING TIME, 30 DEGREES (SECONDS)	2838
MAXIMUM SYNCHRONIZING TIME, 177 DEGREES (SECONDS)	2841
MAXIMUM RADIAL PLAY (SELECT ONE)	
(INCHES)	2843
(MILLIMETERS)	2845
MAXIMUM END PLAY (SELECT ONE)	
(INCHES)	2847
(MILLIMETERS)	2849
MAXIMUM FRICTION TORQUE (SELECT ONE)	
(OUNCE-INCHES)	2851
(NEWTON METERS)	2853
MAXIMUM ELECTRICAL ERROR (MINUTES)	2855
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1446

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2838	AFTER TEST, SYNCHRONIZING TIME AT 30 DEGREES SHALL BE NOT GREATER THAN 2838 SECOND(S).
2841	AFTER TEST, SYNCHRONIZING TIME AT 177 DEGREES SHALL BE NOT GREATER THAN 2841 SECOND(S).
2843	AFTER TEST, RADIAL PLAY SHALL BE NOT GREATER THAN 2843 INCH(S).
2845	AFTER TEST, RADIAL PLAY SHALL BE NOT GREATER THAN 2845 MILLIMETER(S).
2847	AFTER TEST, END PLAY SHALL BE NOT GREATER THAN 2847 INCH(S).
2849	AFTER TEST, END PLAY SHALL BE NOT GREATER THAN 2849 MILLIMETER(S).
2851	AFTER TEST, FRICTION TORQUE SHALL BE NOT GREATER THAN 2851 OUNCE-INCH(S).
2853	AFTER TEST, FRICTION TORQUE SHALL BE NOT GREATER THAN 2853 NEWTON METER(S).
2855	AFTER TEST, ELECTRICAL ERROR SHALL BE NOT GREATER THAN 2855 MINUTE(S).
1446	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1446.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PER MIL-STD-202, METHOD 204.	1447
*TEST CONDITION (LETTER)	1448
PERCENT RATED LOAD APPLIED (PERCENT)	6200
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4709
NORMAL MOUNTING METHOD.	4708
MOUNT PER DOCUMENT (DOC DES)	4707
METHOD OF DETERMINING MECHANICAL RESONANCE (SELECT ONE)	
VISUALLY BY MEANS OF A STROBOTAC.	1533
ELECTRICAL OUTPUT INDICATORS.	1534
DIRECTION OF MOTION (SELECT ONE)	
PARALLEL TO LONGITUDINAL AXIS.	4887
PERPENDICULAR TO LONGITUDINAL AXIS.	4888
THREE MUTUALLY PERPENDICULAR PLANES.	4889
VIBRATION, RANDOM	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1435

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1447	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 204 OF MIL-STD-202.
1448	TEST CONDITION LETTER 1448 SHALL APPLY.
6200	THE LOAD SHALL BE 6200 PERCENT OF THE RATED LOAD.
4709	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4708	MOUNTING SHALL BE BY THE NORMAL METHOD.
4707	MOUNTING SHALL BE IN ACCORDANCE WITH 4707.
1533	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE VISUALLY BY MEANS OF A STROBOTAC.
1534	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE BY ELECTRICAL OUTPUT INDICATORS.
4887	THE DIRECTION OF MOTION SHALL BE PARALLEL TO THE LONGITUDINAL AXIS.
4888	THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE LONGITUDINAL AXIS.
4889	THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUALLY PERPENDICULAR PLANES.
1435	VIBRATION, RANDOM. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1435.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NO EVIDENCE OF PHYSICAL DAMAGE.	1436
AFTER TEST REQUIREMENTS	
MINIMUM INSULATION RESISTANCE (MEGOHMS)	1441
NO EVIDENCE OF DIELECTRIC BREAKDOWN.	2857
MAXIMUM CURRENT LEAKAGE (MILLIAMPERES)	6366
MAXIMUM BRUSH CONTACT RESISTANCE (OHMS)	2861
MAXIMUM FUNDAMENTAL NULL VOLTAGE (MILLIVOLTS)	2863
MAXIMUM TOTAL NULL VOLTAGE (MILLIVOLTS)	2865
MAXIMUM RECEIVER ERROR (MINUTES)	2867
MAXIMUM SYNCHRONIZING TIME, 30 DEGREES (SECONDS)	2868
MAXIMUM SYNCHRONIZING TIME, 177 DEGREES (SECONDS)	2870
MAXIMUM RADIAL PLAY (SELECT ONE)	
(INCHES)	2872

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1436	VIBRATION, RANDOM. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1441	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 1441 MEGOHMS.
2857	THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING OR INSULATION BREAKDOWN.
6366	AFTER TEST, LEAKAGE SHALL BE NOT GREATER THAN 6366 MILLIAMPERES.
2861	AFTER TEST, BRUSH CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2861 OHM(S).
2863	AFTER TEST, FUNDAMENTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 2863 MILLIVOLT(S).
2865	AFTER TEST, TOTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 2865 MILLIVOLT(S).
2867	AFTER TEST, RECEIVER ERROR SHALL BE NOT GREATER THAN 2867 MINUTE(S).
2868	AFTER TEST, SYNCHRONIZING TIME AT 30 DEGREES SHALL BE NOT GREATER THAN 2868 SECOND(S).
2870	AFTER TEST, SYNCHRONIZING TIME AT 177 DEGREES SHALL BE NOT GREATER THAN 2870 SECOND(S).
2872	AFTER TEST, RADIAL PLAY SHALL BE NOT GREATER THAN 2872 INCH(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
(MILLIMETERS)	2874
MAXIMUM END PLAY (SELECT ONE)	
(INCHES)	2876
(MILLIMETERS)	2878
MAXIMUM FRICTION TORQUE (SELECT ONE)	
(OUNCE-INCHES)	2880
(NEWTON METERS)	2882
MAXIMUM ELECTRICAL ERROR (MINUTES)	2884
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1426
PER MIL-STD-202, METHOD 214.	1427
*TEST CONDITION (ROMAN NUMERAL AND LETTER)	1428
*DURATION OF APPLICATION (SELECT ONE)	
(MINUTES)	1438
(HOURS)	1431

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2874	AFTER TEST, RADIAL PLAY SHALL BE NOT GREATER THAN 2874 MILLIMETER(S).
2876	AFTER TEST, END PLAY SHALL BE NOT GREATER THAN 2876 INCH(S).
2878	AFTER TEST, END PLAY SHALL BE NOT GREATER THAN 2878 MILLIMETER(S).
2880	AFTER TEST, FRICTION TORQUE SHALL BE NOT GREATER THAN 2880 OUNCE-INCH(S).
2882	AFTER TEST, FRICTION TORQUE SHALL BE NOT GREATER THAN 2882 NEWTON METER(S).
2884	AFTER TEST, ELECTRICAL ERROR SHALL BE NOT GREATER THAN 2884 MINUTE(S).
1426	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1426.
1427	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 214 OF MIL-STD-202.
1428	TEST CONDITION NUMBER AND LETTER 1428 SHALL APPLY.
1438	THE DURATION OF THE TEST SHALL BE 1438 MINUTE(S).
1431	THE DURATION OF THE TEST SHALL BE 1431 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MONITORING INSTRUMENTATION OF EXCITATION (SELECT ONE)	
ANY SUITABLE SYSTEM.	1452
CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.	1453
CALIBRATED OSCILLOSCOPE.	1459
NUMBER OF VIBRATION MONITORING TEST POINTS (QUANTITY)	1430
LOCATION OF MONITORING POINTS (SELECT ONE)	
ANY SUITABLE LOCATION.	1439
AS CLOSE AS PRACTICAL TO TEST SPECIMEN.	1462
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4977
NORMAL MOUNTING METHOD.	4976
MOUNT PER DOCUMENT (DOC DES)	4975
WIRE LEAD STRESS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1625

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1452	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE ANY SUITABLE INSTRUMENTATION SYSTEM.
1453	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.
1459	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED OSCILLOSCOPE.
1430	THERE SHALL BE 1430 VIBRATION MONITORING POINT(S).
1439	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE ANY SUITABLE LOCATION.
1462	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE AS CLOSE AS PRACTICAL TO THE TEST SPECIMEN(S).
4977	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4976	MOUNTING SHALL BE BY THE NORMAL METHOD.
4975	MOUNTING SHALL BE IN ACCORDANCE WITH 4975.
1625	WIRE LEAD STRESS. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1625.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NO EVIDENCE OF DAMAGE.	1626
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1618
PER MIL-S-20708.	1619
TEST LOAD (SELECT ONE)	
(POUNDS)	1620
(NEWTONS)	1622
MOUNTING HARDWARE (SEE TABLE VIII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VIII IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
1626	WIRE LEAD STRESS. EACH LEAD SHALL BE CAPABLE OF WITHSTANDING THE STRESS WITHOUT INSULATION DAMAGE, BREAKAGE OF STRANDS, OR LEAD PULLOUT.
1618	WIRE LEAD STRESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1618.
1619	WIRE LEAD STRESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-20708.
1620	THE TEST LOAD SHALL BE 1620 POUND(S).
1622	THE TEST LOAD SHALL BE 1622 NEWTON(S).
	MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285	7630
MIL-STD-130.	7629
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

Custodians:
Army-MI

User activity:
Army-MU

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

Preparing activity:
Army-MI


(Project EDS-A370)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX A


ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

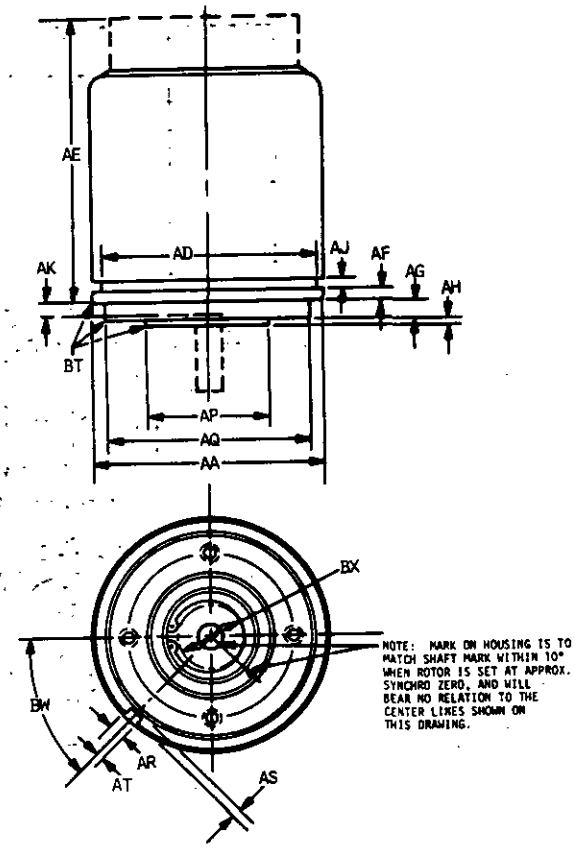


080-01-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

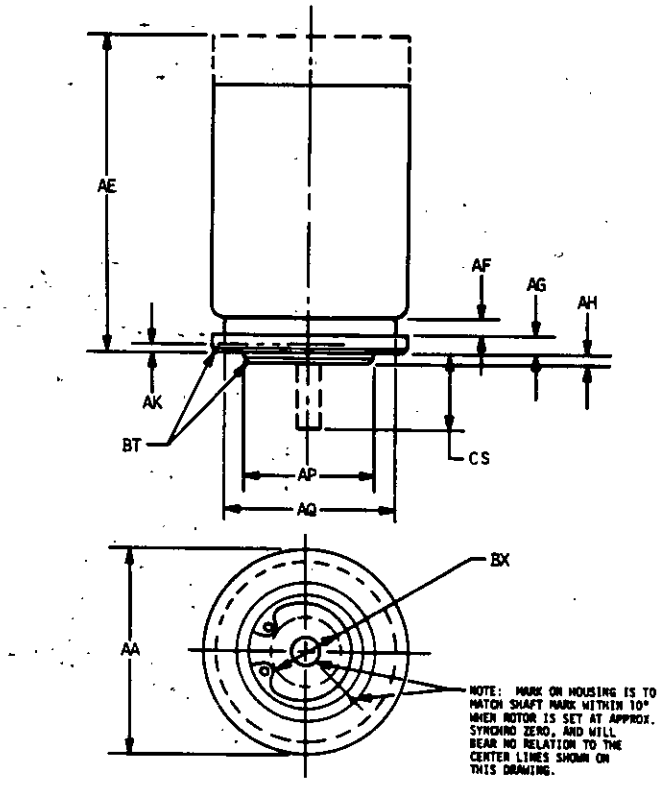


080-01-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

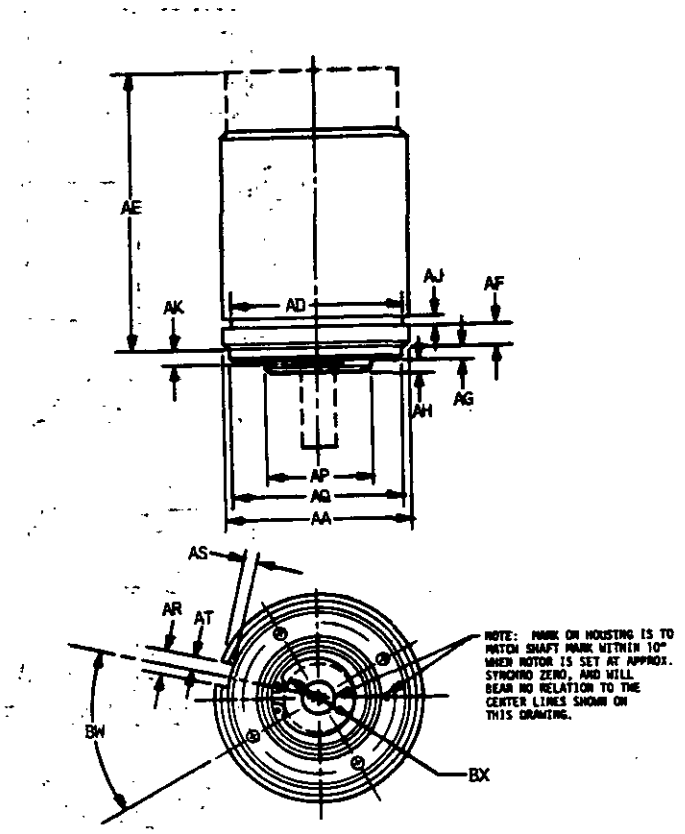


080-01-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

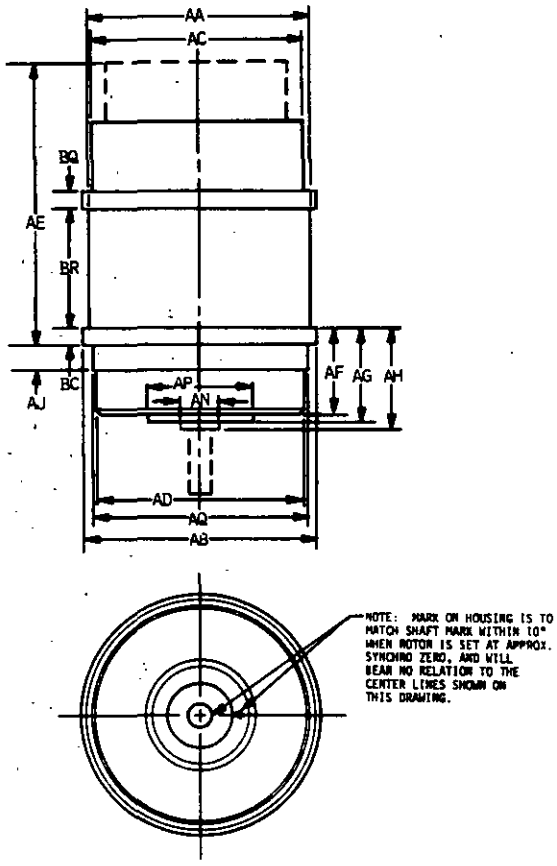


080-01-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

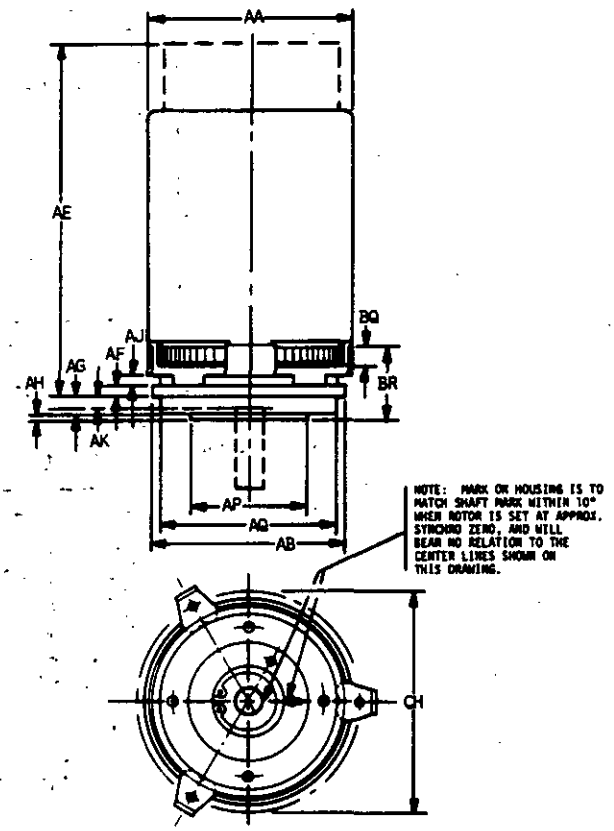


080-01-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

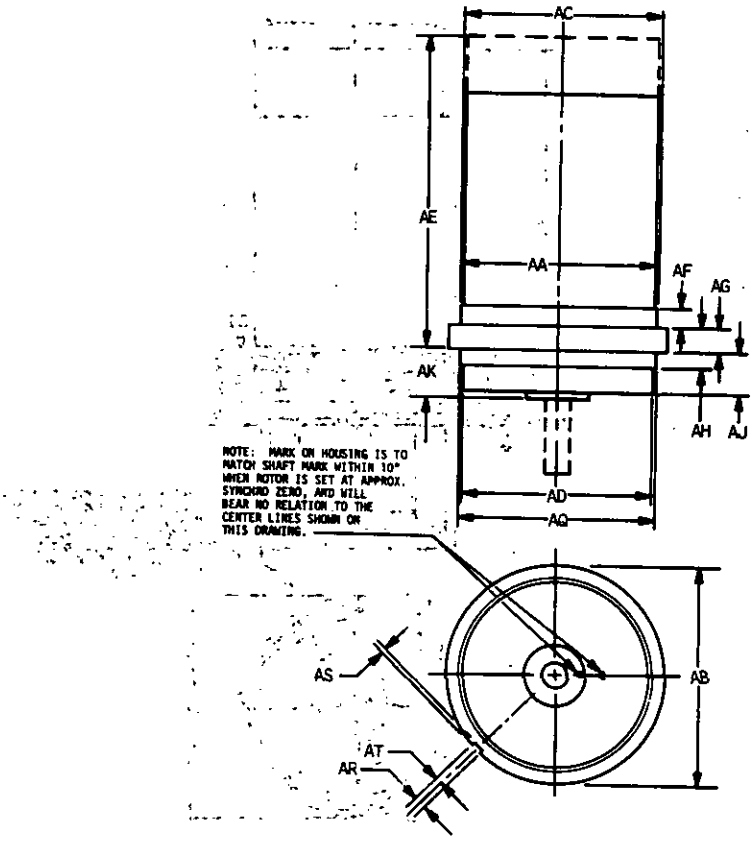


080-01-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

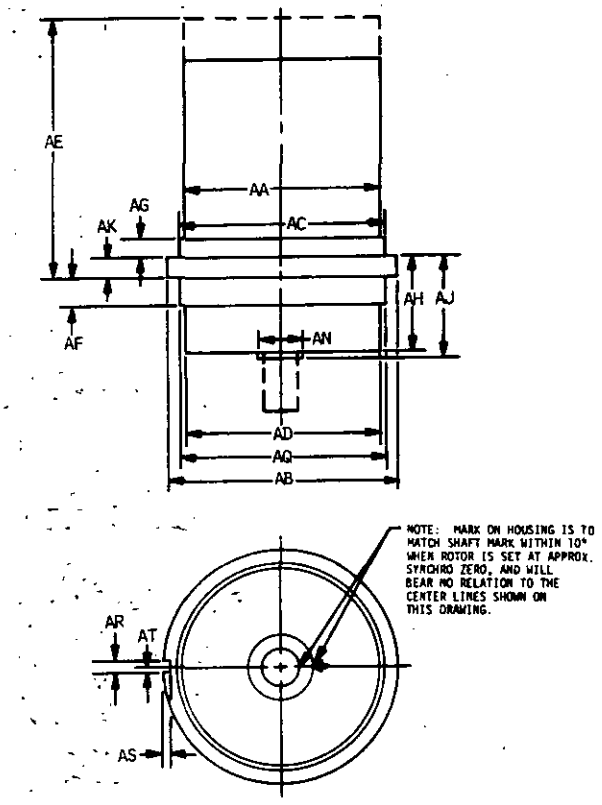


080-01-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

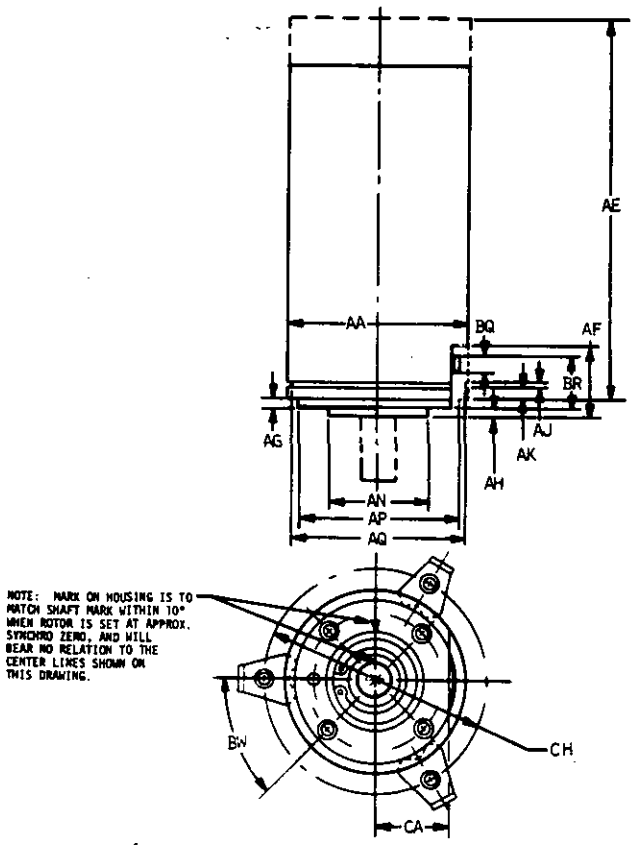


080-01-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

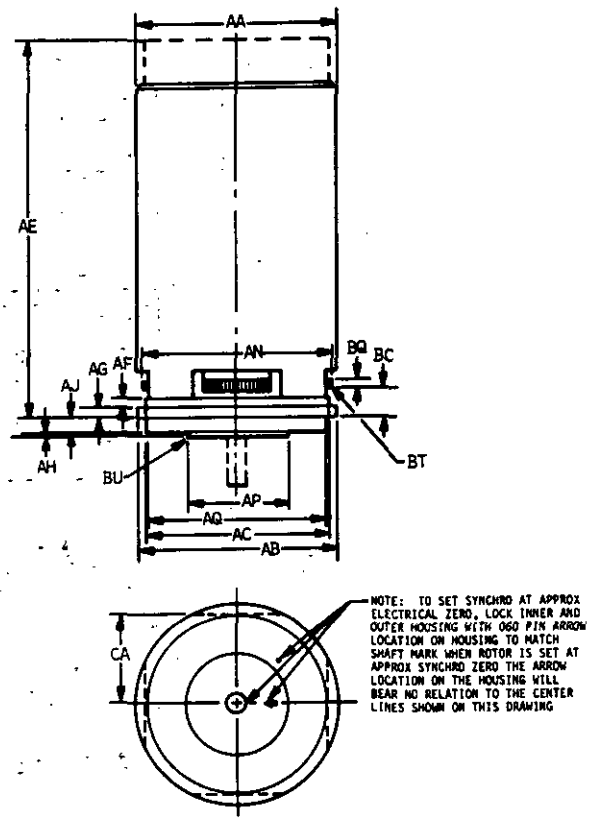


080-01-9


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

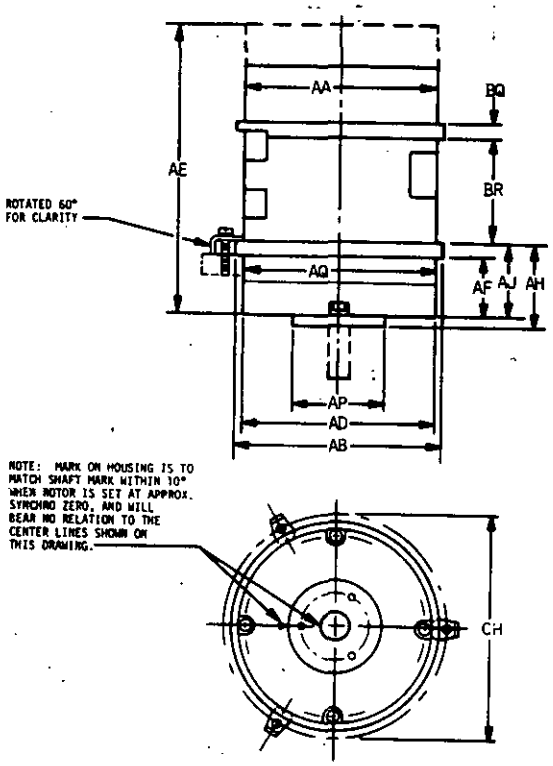

080-01-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

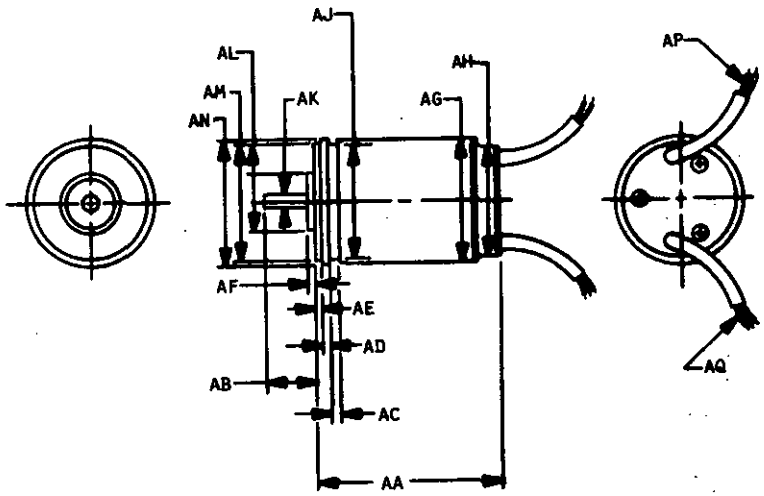



SHAFT DETAIL

080-01-11



080-04-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	8	1414	104	1500	84	1619	126
0102	8	1416	104	1502	84	1620	126
0103	8	1418	102	1504	84	1622	126
0104	8	1419	102	1508	82	1625	124
0105	8	1420	104	1509	82	1626	126
0107	10	1421	104	1511	58	1632	30
0108	10	1426	122	1520	60	1634	30
0700	8	1427	122	1522	58	1638	30
0800	8	1428	122	1523	58	1640	30
1004	8	1429	60	1524	58	1652	68
1005	8	1430	124	1533	118	1654	68
1006	8	1431	122	1534	118	1655	70
1008	8	1432	60	1557	24	1658	70
1009	14	1433	102	1558	24	1660	68
1371	58	1435	118	1562	16	1662	68
1372	60	1436	120	1563	16	1664	68
1373	58	1438	122	1564	16	1672	40
1375	102	1439	124	1565	18	1674	40
1376	58	1441	120	1566	18	1676	40
1377	58	1446	116	1568	18	1677	40
1378	58	1447	118	1569	18	1678	40
1380	56	1448	118	1580	18	1680	40
1381	60	1449	64	1581	18	1682	40
1383	60	1452	124	1586	18	1683	40
1384	56	1453	124	1587	18	1692	48
1386	56	1455	114	1588	18	1694	50
1387	56	1456	114	1589	18	1696	50
1388	58	1459	124	1590	14	1697	50
1391	62	1461	114	1593	18	1700	50
1394	60	1462	124	1594	18	1702	50
1396	60	1468	80	1595	18	1704	50
1397	62	1477	52	1596	18	1712	48
1400	60	1478	80	1597	20	1714	48
1404	60	1482	80	1598	20	1716	48
1406	60	1486	80	1599	20	1718	66
1407	58	1488	80	1600	20	1720	68
1410	102	1494	78	1601	20	1724	66
1411	102	1495	78	1602	20	1726	66
1412	104	1497	58	1603	20	1736	68
1413	104	1498	58	1618	126	1738	68

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1746	68	1922	86	2096	88	2232	100
1748	68	1924	86	2097	88	2242	96
1758	112	1926	86	2098	88	2244	96
1760	112	1930	86	2108	90	2246	96
1764	110	1942	86	2110	90	2252	96
1766	112	1944	86	2118	88	2256	98
1768	112	1972	112	2119	88	2266	94
1778	66	1974	112	2120	88	2268	94
1780	66	1976	114	2122	88	2270	94
1784	66	1978	114	2123	88	2272	94
1786	66	1986	112	2154	82	2274	94
1796	38	1988	112	2158	82	2276	96
1797	38	1990	112	2160	82	2278	96
1798	38	2002	76	2162	82	2280	96
1799	40	2004	76	2164	82	2281	96
1800	40	2010	74	2166	82	2282	96
1802	38	2011	74	2170	82	2283	96
1804	38	2012	74	2171	82	2284	96
1812	64	2014	76	2172	84	2286	96
1814	66	2016	76	2173	84	2302	28
1815	66	2026	74	2174	84	2304	28
1816	66	2028	74	2175	84	2306	28
1822	64	2038	74	2176	84	2310	28
1823	64	2039	74	2192	100	2312	30
1824	64	2040	74	2194	100	2314	30
1825	64	2042	74	2196	100	2322	28
1851	72	2044	74	2200	100	2324	28
1852	72	2056	90	2202	100	2326	28
1853	72	2058	90	2210	98	2328	28
1854	72	2066	90	2212	98	2352	26
1855	72	2067	90	2214	98	2354	26
1857	72	2068	90	2216	98	2356	26
1866	72	2070	90	2218	98	2360	28
1868	72	2071	90	2220	98	2362	28
1878	94	2072	90	2222	98	2364	28
1880	94	2082	88	2224	98	2372	26
1908	92	2084	88	2226	98	2374	26
1909	92	2092	86	2228	100	2376	26
1910	92	2093	88	2229	100	2378	26
1911	94	2094	88	2230	100	2380	26

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2401	102	2644	48	2834	114	2902	62
2402	102	2655	44	2836	114	2904	62
2412	102	2656	44	2838	116	2906	62
2421	100	2721	42	2840	52	2908	62
2422	100	2722	42	2841	116	2910	62
2431	110	2724	42	2842	52	2912	62
2432	110	2726	42	2843	116	2914	62
2433	110	2728	42	2844	52	2916	62
2434	110	2730	42	2845	116	2950	78
2436	110	2731	42	2846	52	2952	78
2437	110	2732	42	2847	116	2954	78
2438	110	2733	42	2848	54	2956	78
2450	108	2734	44	2849	116	2958	78
2451	108	2735	44	2850	54	2960	78
2452	110	2736	44	2851	116	2962	78
2453	110	2738	44	2852	54	2964	80
2463	70	2740	44	2853	116	2966	80
2464	70	2742	44	2854	54	2968	80
2465	70	2744	44	2855	116	2970	80
2466	70	2746	44	2856	54	2972	80
2467	72	2798	104	2857	120	2974	80
2468	72	2800	106	2858	54	4400	47
2469	72	2802	106	2860	54	4401	47
2471	72	2804	106	2861	120	4402	47
2472	72	2806	106	2862	54	4403	47
2480	70	2808	106	2863	120	4404	47
2481	70	2810	20	2864	54	4405	47
2482	70	2811	106	2865	120	4406	47
2483	70	2812	106	2866	54	4407	47
2521	92	2814	106	2867	120	4408	47
2522	92	2816	106	2868	120	4409	47
2524	92	2818	106	2870	120	4410	47
2525	92	2820	20	2872	120	4411	47
2531	92	2821	108	2874	122	4412	47
2532	92	2822	108	2876	122	4413	47
2625	48	2824	108	2878	122	4414	47
2626	48	2829	114	2880	122	4415	47
2627	48	2830	20	2882	122	4416	47
2632	48	2831	114	2884	122	4417	47
2642	48	2832	114	2900	62	4418	47

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4419	47	4459	47	4715	108	4867	36
4420	47	4460	47	4717	38	4868	24
4421	47	4461	47	4719	108	4869	38
4422	47	4462	47	4722	104	4870	38
4423	47	4463	47	4723	104	4874	34
4424	47	4464	47	4728	104	4875	34
4425	47	4465	47	4754	50	4878	76
4426	47	4466	47	4755	52	4884	32
4427	47	4467	47	4756	52	4885	32
4428	47	4468	47	4760	50	4886	32
4429	47	4469	47	4761	50	4887	118
4430	47	4470	47	4762	50	4888	118
4431	47	4471	47	4765	78	4889	118
4432	47	4472	47	4766	78	4890	56
4433	47	4473	47	4770	76	4891	34
4434	47	4474	47	4771	76	4892	24
4435	47	4475	47	4772	76	4893	24
4436	47	4476	47	4773	76	4894	30
4437	47	4477	47	4782	76	4897	38
4438	47	4478	47	4788	56	4900	34
4439	47	4479	47	4798	52	4902	34
4440	47	4480	47	4799	52	4906	30
4441	47	4481	47	4805	52	4908	30
4442	47	4482	47	4842	36	4950	14
4443	47	4483	47	4844	36	4975	124
4444	47	4484	47	4845	36	4976	124
4445	47	4485	47	4846	36	4977	124
4446	47	4486	47	4848	36	4980	64
4447	47	4487	47	4849	32	4981	64
4448	47	4488	47	4850	36	4983	64
4449	47	4489	47	4853	56	4984	64
4450	47	4490	47	4854	36	4985	64
4451	47	4684	84	4855	36	4986	64
4452	47	4685	84	4856	34	5000	36
4453	47	4686	84	4859	34	5046	12
4454	47	4707	118	4861	36	5048	14
4455	47	4708	118	4862	36	5052	12
4456	47	4709	118	4863	24	5054	12
4457	47	4713	108	4864	24	5060	12
4458	47	4714	108	4865	24	5061	12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
5062	12	6992	128				
5063	12	6993	128				
5068	12	6994	128				
5069	12	6995	128				
6200	118	7001	126				
6206	56	7002	126				
6210	26	7003	126				
6226	24	7004	126				
6233	24	7005	126				
6239	24	7021	22				
6250	24	7022	22				
6251	24	7023	22				
6263	26	7024	22				
6264	26	7301	12				
6265	26	7302	12				
6267	38	7572	14				
6272	22	7577	14				
6273	22	7580	16				
6277	22	7629	128				
6280	34	7630	128				
6292	32						
6293	32						
6294	32						
6300	32						
6308	34						
6310	34						
6311	32						
6312	32						
6359	56						
6363	106						
6364	114						
6366	120						
6369	8						
6372	128						
6870	126						
6873	8						
6874	10						
6941	10						
6942	10						
6991	128						

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Acceleration	22
Additional Part Marking	128
Additional Requirements	126
Altitude (High Temperature)	26
Altitude (Low Temperature)	28
Altitude Rating	12
Aperture Cards Required	10
Applicable Documents	130
Base Document	8
Brush Contact Resistance	30
City, State, Zip	8
Classification	14
Company Name/Command	8
Configuration	14
Contract Number/Office Symbol	8
Control, Source	8
Control, Specification	10
Definition of Hermetic Sealing	128
Design and Construction	16
Dielectric Withstanding Voltage At Reduced Barometric Pressure	30
Dielectric Withstanding Voltage At Sea Level	34
Electrical Error	38
End Play	40
Endurance	42
Explosion Proof	48
Finishes	16
Format	8
Friction Torque	48
Fungus	50
Government Design Activity FSCM	8
Humidity	52
Illustrations	14
Insulation Resistance	56

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Materials	16
Metals	16
Moisture Resistance	60
Mounting Hardware	126
Nomenclature	130
Notes	130
Null Voltage	64
Packaging	130
Part Marking	128
Part Number	10
Part Number Cross-Reference	130
Performance Characteristics	22
Phase Shift	66
Phone Number	8
Primary Current	66
Primary Power	68
Quality Assurance Provisions	130
Radial Play	68
Radio Noise (Radiated and Conducted)	70
Receiver Error	72
Requester's FSCM	8
Requester's Name	8
Revision of AEDPS Document (Number)	10
Rotor Open Circuit Impedance	74
Rotor Short Circuit Impedance	74
Salt Spray	76
Scope	10
Shock, High Impact	78
Shock, Specified Pulse	82
Source Table	10
Spinning (Receivers and Differential Receivers)	86
Stator Open Circuit Impedance	86
Stator Open Circuit Quadrature Impedance	88
Stator Short Circuit Impedance	90
Street/Building	8
Structureborne Noise	92
Superseded Document	130
Synchronizing Time	92
System Application	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Tabulated Characteristics	16
Temperature High (Ambient and Operational)	94
Temperature Low (Ambient and Operational)	98
Temperature Rating	12
Temperature Rise	100
Terminal Strength	102
Thermal Shock (Temperature Cycling)	104
Torque Gradient	108
Transformation Ratio	110
Units of Measure	10
Variation of Voltge and Frequency	112
Vibration, High Frequency	114
Vibration, Random	118
Weight/Mass	22
Wire Lead Stress	124
Workmanship	126

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-44A(MI), dated 31 Aug 1987 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-44A(MI), dated 31 Aug 1987 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.