DOD-STD-35-45A(MI)

31 AUGUST 1987

SUPERSEDING
MIL-STD-35-45(MI)
9 JULY 1974

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

RESOLVERS, ELECTRICAL

AREA EDS

NO DELIVERABLE DATA
REQUIRED BY THIS DOCUMENT

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL COMMAND
ALEXANDRIA, VA 22333

Resolvers
Automated Engineering
Document Preparation System

DOD-STD-35-45A(MI)

1. This Military Standard is approved for use by AMC, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Command, ATTN: AMSMI-RD-SE-TD-ST, Redstone Arsenal, Alabama 35898-5270, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-45A(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for Resolvers.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	3
	2.1	Government Documents	3
	2.1.1	Specifications and Standards	3
	2.2	Other Publications	4
	2.3	Order of Precedence	4
	3.	DEFINITIONS	5
	4.	GENERAL REQUIREMENTS	6
	4.1	Introduction	6
	4.2	Specification Requirement Sheet (SRS)	6
	4.3	Configuration	6
	4.3.1	Dimensions	6
	4.3.2	Illustrations	6
	4.4	Units of Measure	6
	5.	DETAILED REQUIREMENTS	7
	5.1	Introduction	7
	5.2	MSE Formats	7
	5.3	Referenced Documents	7
	5.4	Tabulation	7
	5.5	Keyword Code Index (KCI) and Standard Paragraphs	8
	5.5.1	Interrelationship of Codes	8
	5.5.2	Automatic MSE Data	8
	5.5.3	DOD-STD-35 Tables	8

TABLES

Table	I.	Title Index	2
	II.	Tabulation Candidates	7

APPENDICES

APPENDIX	A.	Illustrations	138
	B.	Characteristic Code Index	147
		Index	153

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for Resolvers.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate a MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts, have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects applicable to all AEDPS dash-numbered parts and included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specification (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for a MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSEs for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes, listed in the Title Index and entered on a SRS, specifies that the title of the MSE will be the title shown in the Title Index.

Each MSE title, listed in the Title Index, is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference. When more than one document is listed for a MSE title, this information will be useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX

MSE TITLE	TITLE CODE	BASE DOCUMENT	
		NUMBER	COVERAGE
RESOLVERS, ELECTRICAL, AC	083001	MIL-R-21530	MULTI FREQ
		MIL-R-23417	SINGLE FREQ
RESOLVERS, ELECTRICAL, LINEAR	083002	MIL-R-50781	LINEAR

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Government Documents.

2.1.1 Specifications and Standards. Unless otherwise specified, the following specifications and standards, of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-R-21530	Resolvers, Electrical, AC for use in Polaris Fleet Ballistic Missile Weapons System, General Specification for
MIL-R-23417	Resolvers, Electrical, General Specification for
MIL-R-50781	Resolvers, Electrical, Linear, General Specification for

STANDARD

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-130	Identification Marking of US Military Property
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-810	Environmental Test Methods and Engineering Guidelines
MIL-STD-1285	Electronic Parts Marking

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, drawings, and publications, required by contractors in connection with specific procurement functions, should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other Publications. The following documents form a part of this standard to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the issue of the DoDISS specified in the solicitation. The issues of documents which have not been adopted shall be those in effect on the date of the cited DoDISS.

ASTME380 Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, PA 19103.)

(Nongovernment standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of Precedence. In the event of conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currenversion before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Resolvers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare a SRS for Resolvers, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Resolvers.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions, described in DOD-STD-35, are applicable to Resolvers.

4.3.2 Illustrations. Illustrations, applicable to Resolvers, are contained in Appendix A to this document.

4.4 Units of Measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE Formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced Documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table II provides codes for column headings which may be used for Resolvers characteristics. When different units of measure are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

TABLE II. TABULATION CANDIDATES

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1562	RESOLVER SIZE	1563	SUPPLY FREQUENCY	1567	INPUT VOLTS
1580	TEST VOLTS	1581	TEST VOLTS TOLERANCE PERCENT	1582	TEST FREQ HERTZ
1583	TEST FREQ TOLERANCE PERCENT	1584	INPUT COIL IMPEDANCE OHMS	1585	MAXIMUM ELECTRICAL TRAVEL DEG

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.5 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on a SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and it's associated code. Enter, on the SRS, the code and the characteristic value required. After the part's unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.5.1 Interrelationship of Codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The standard paragraph, of which the code is a part, is shown adjacent to the code on the right-hand page. When a characteristic value, entered with a code, becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact characteristic value entry, as supplied with the code, except for "X" entries.

5.5.2 Automatic MSE Data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without making additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.5.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in DOD-STD-35. Refer to DOD-STD-35 for general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

(THIS PAGE INTENTIONALLY LEFT BLANK)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*REQUESTER'S FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT.	0700
ONE SECTION DOCUMENT.	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6874	THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).
0107	
0108	0108.
	SCOPE.
	SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.
	PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.
	PART NUMBER. THE PART NUMBER FOR THE ITEMS IS (THE SAME AS THE NUMBER OF THIS DOCUMENT) PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.
6941	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.
6942	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
DIMENSION TABLE, (SEE TABLE III, DOD-STD-35)	
*UNITS (SELECT ONE)	
INCHES	7572
MILLIMETERS	7577
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	
NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.	4950
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	
MATERIALS (SEE TABLE VI, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VI IS USED.	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.
	MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FINISHES (SEE TABLE VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
METALS	
DISSIMILAR METALS.	7580
DESIGN AND CONSTRUCTION	
RESOLVER SIZE (DESIGNATION)	1562
FREQUENCY (HERTZ)	1563
TOLERANCE (PERCENT)	1564
INPUT VOLTAGE (VOLTS RMS)	1567
TOLERANCE (PERCENT)	1568
COMPENSATION (SELECT ONE)	
RESISTOR COMPENSATED.	1571
WINDING COMPENSATED.	1572
RESISTOR AND WINDING COMPENSATED.	1573

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
7580	METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.
	DESIGN AND CONSTRUCTION.
1562	RESOLVER SIZE. RESOLVER SIZE SHALL BE 1562.
1563	FREQUENCY. SUPPLY FREQUENCY SHALL BE 1563 HERTZ.
1564	TOLERANCE SHALL BE PLUS OR MINUS 1564 PERCENT.
1567	INPUT VOLTAGE. INPUT VOLTAGE SHALL BE 1567 VOLT(S) RMS.
1568	TOLERANCE SHALL BE PLUS OR MINUS 1568 PERCENT.
1571	COMPENSATION. RESOLVER SHALL BE RESISTOR COMPENSATED.
1572	COMPENSATION. RESOLVER SHALL BE WINDING COMPENSATED.
1573	COMPENSATION. RESOLVER SHALL BE RESISTOR AND WINDING COMPENSATED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NOT COMPENSATED.	1574
EXCITATION WINDING (SELECT ONE)	
ROTOR.	1575
STATOR.	1576
INPUT TEST VOLTAGE AND FREQUENCY	
TEST VOLTAGE (VOLTS RMS)	1580
*TOLERANCE (PERCENT)	1581
TEST FREQUENCY (HERTZ)	1582
*TOLERANCE (PERCENT)	1583
INPUT COIL IMPEDANCE (OHMS)	1584
MAXIMUM EFFECTIVE ELECTRICAL TRAVEL (DEGREES)	1585
TRANSFORMATION RATIO (OUTPUT/INPUT) (RATIO)	1587
TOLERANCE (PERCENT)	1588
TRANSFORMATION RATIO (ROTOR/COMPENSATION) (RATIO)	1589
TOLERANCE (PERCENT)	1590
PHASE SHIFT (OUTPUT/INPUT) (DEGREES)	1592
TOLERANCE (DEGREES)	1594

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1574	COMPENSATION. RESOLVER SHALL NOT BE COMPENSATED.
1575	EXCITATION WINDING. THE EXCITATION WINDING OF THE RESOLVER SHALL BE THE ROTOR.
1576	EXCITATION WINDING. THE EXCITATION WINDING OF THE RESOLVER SHALL BE THE STATOR.
	INPUT TEST VOLTAGE AND FREQUENCY.
1580 1581	TEST VOLTAGE SHALL BE 1580 VOLT(S) RMS PLUS OR MINUS 1581 PERCENT.
1582 1583	TEST FREQUENCY SHALL BE 1582 HERTZ PLUS OR MINUS 1583 PERCENT.
1584	INPUT COIL IMPEDANCE. INPUT COIL IMPEDANCE SHALL BE 1584 OHM(S).
1585	MAXIMUM EFFECTIVE ELECTRICAL TRAVEL. MAXIMUM TRAVEL SHALL BE PLUS OR MINUS 1585 DEGREES.
1587	TRANSFORMATION RATIO (OUTPUT/INPUT). OUTPUT/INPUT TRANSFORMATION RATIO SHALL BE 1587.
1588	TOLERANCE SHALL BE PLUS OR MINUS 1588 PERCENT.
1589	TRANSFORMATION RATIO (ROTOR/COMPENSATION). ROTOR/COMPENSATION TRANSFORMATION RATIO SHALL BE 1589.
1590	TOLERANCE SHALL BE PLUS OR MINUS 1590 PERCENT.
1592	PHASE SHIFT (OUTPUT/INPUT). OUTPUT/INPUT PHASE SHIFT SHALL BE 1592 DEGREE(S).
1594	TOLERANCE SHALL BE PLUS OR MINUS 1594 DEGREE(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PHASE SHIFT (ROTOR/COMPENSATOR) (DEGREES)	1596
TOLERANCE (DEGREES)	1598
LOW CORNER FREQUENCY (HERTZ)	1600
RESONANT FREQUENCY.	
MINIMUM ROTOR (KILOHERTZ)	1604
MINIMUM COMPENSATOR (KILOHERTZ)	1606
DC RESISTANCE (ROTOR) (OHMS)	1620
TOLERANCE (PERCENT)	1621
DC RESISTANCE (STATOR) (OHMS)	1622
TOLERANCE (PERCENT)	1623
DC RESISTANCE (COMPENSATOR) (OHMS)	1624
TOLERANCE (PERCENT)	1625
SHAFT TEETH (QUANTITY)	1630
ROTOR HARDNESS ROCKWELL (SELECT ONE)	
RANGE (LOW VALUE)	1631
*TO (HIGH VALUE)	1632
NOMINAL (VALUE)	1633

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1596	PHASE SHIFT (ROTOR/COMPENSATOR). ROTOR/COMPENSATOR PHASE SHIFT SHALL BE 1596 DEGREE(S).
1598	TOLERANCE SHALL BE PLUS OR MINUS 1598 DEGREE(S).
1600	LOW CORNER FREQUENCY. MAXIMUM LOW CORNER FREQUENCY SHALL BE 1600 HERTZ.
	RESONANT FREQUENCY.
1604	MINIMUM ROTOR RESONANT FREQUENCY SHALL BE 1604 KILOHERTZ.
1606	MINIMUM COMPENSATOR RESONANT FREQUENCY SHALL BE 1606 KILOHERTZ.
1620	DC RESISTANCE (ROTOR). DC RESISTANCE SHALL BE 1620 OHM(S).
1621	TOLERANCE SHALL BE PLUS OR MINUS 1621 PERCENT.
1622	DC RESISTANCE (STATOR). DC RESISTANCE SHALL BE 1622 OHM(S).
1623	TOLERANCE SHALL BE PLUS OR MINUS 1623 PERCENT.
1624	DC RESISTANCE (COMPENSATOR). DC RESISTANCE SHALL BE 1624 OHM(S).
1625	TOLERANCE SHALL BE PLUS OR MINUS 1625 PERCENT.
1630	SHAFT TEETH. NUMBER OF TEETH ON THE SPLINE SHALL BE 1630.
1631 1632	ROTOR SHAFT HARDNESS. ROTOR SHAFT HARDNESS SHALL BE EQUIVALENT TO A RANGE ON THE ROCKWELL C SCALE OF 1631 TO 1632.
1633	ROTOR SHAFT HARDNESS. ROTOR SHAFT HARDNESS SHALL BE EQUIVALENT TO 1633 ON THE ROCKWELL C SCALE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PERPENDICULARITY (SELECT ONE)	
(INCH TIR)	1638
(MILLIMETER TIR)	2770
CONCENTRICITY (SELECT ONE)	
(INCH TIR)	1639
(MILLIMETER TIR)	2772
RUNOUT (SELECT ONE)	
(INCH TIR)	1637
(MILLIMETER TIR)	2774
ALTITUDE	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	6790
SEA LEVEL TO (METERS)	6791

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1638	PERPENDICULARITY. PERPENDICULARITY OF RESOLVER SURFACE SHALL BE 1638 INCH(S) TOTAL INDICATOR READING.
2770	PERPENDICULARITY. PERPENDICULARITY OF RESOLVER SURFACE SHALL BE 2770 MILLIMETER(S) TOTAL INDICATOR READING.
1639	CONCENTRICITY. CONCENTRICITY OF RESOLVER SURFACE SHALL BE 1639 INCH(S) TOTAL INDICATOR READING.
2772	CONCENTRICITY. CONCENTRICITY OF RESOLVER SURFACE SHALL BE 2772 MILLIMETER(S) TOTAL INDICATOR READING.
1637	RUNOUT. RUNOUT OF RESOLVER ROTOR SHAFT SHALL BE NOT GREATER THAN 1637 INCH(S) TOTAL INDICATOR READING.
2774	RUNOUT. RUNOUT OF RESOLVER ROTOR SHAFT SHALL BE NOT GREATER THAN 2774 MILLIMETER(S) TOTAL INDICATOR READING.
6790	OPERATING ALTITUDE. THE OPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6790 FEET.
6791	OPERATING ALTITUDE. THE OPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6791 METERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	6792
SEA LEVEL TO (METERS)	6793
TEMPERATURE	
MAXIMUM OPERATING (DEGREES CELSIUS)	6794
MAXIMUM NONOPERATING (DEGREES CELSIUS)	6795
MAXIMUM AMBIENT OPERATING (DEGREES CELSIUS)	6798
MINIMUM OPERATING (DEGREES CELSIUS)	6799
MINIMUM AMBIENT OPERATING (DEGREES CELSIUS)	6803
PERFORMANCE CHARACTERISTICS (SEE TABLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6792	NONOPERATING ALTITUDE. THE NONOPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6792 FEET.
6793	NONOPERATING ALTITUDE. THE NONOPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6793 METERS.
6794	MAXIMUM OPERATING TEMPERATURE. THE OPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6794 DEGREES CELSIUS.
6795	MAXIMUM NONOPERATING TEMPERATURE. THE NONOPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6795 DEGREES CELSIUS.
6798	MAXIMUM AMBIENT OPERATING TEMPERATURE. THE AMBIENT OPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6798 DEGREES CELSIUS.
6799	MINIMUM OPERATING TEMPERATURE. THE OPERATING TEMPERATURE SHALL BE NOT LESS THAN 6799 DEGREES CELSIUS.
6803	MINIMUM AMBIENT OPERATING TEMPERATURE. THE AMBIENT OPERATING TEMPERATURE SHALL BE NOT LESS THAN 6803 DEGREES CELSIUS.
	PERFORMANCE CHARACTERISTICS. PERFORMANCE CHARACTERISTICS SHALL BE AS SHOWN IN THE PERFORMANCE CHARACTERISTICS TABLE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WEIGHT/MASS	
MAXIMUM WEIGHT/MASS PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024
ACCELERATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6272
NO EVIDENCE OF PHYSICAL DAMAGE.	6273
AFTER TEST REQUIREMENTS	
MAXIMUM BRUSH CONTACT RESISTANCE (OHMS)	3110
MAXIMUM LEAKAGE CURRENT (AMPERES)	3111

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7023	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).
7021	MAXIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	MAXIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).
6272	ACCELERATION. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6272.
6273	ACCELERATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
3110	AFTER TEST, THE BRUSH CONTACT RESISTANCE SHALL BE NOT GREATER THAN 3110 OHM(S).
3111	AFTER TEST, THE DIELECTRIC WITHSTANDING VOLTAGE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 3111 MILLIAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MINIMUM INSULATION RESISTANCE (MEGOHMS)	3112
MAXIMUM FUNCTION ERROR (PERCENT)	3113
MAXIMUM ELECTRICAL ERROR (MINUTES)	3114
MAXIMUM TOTAL NULL VOLTAGE (MILLIVOLTS)	3115
MAXIMUM FUNDAMENTAL NULL VOLTAGE (MILLIVOLTS)	3116
MAXIMUM FRICTION TORQUE (SELECT ONE)	
(OUNCE-INCHES)	3117
(NEWTON METERS)	2970
MAXIMUM RADIAL PLAY (SELECT ONE)	
(INCHES)	3118
(MILLIMETERS)	2972
MAXIMUM END PLAY (SELECT ONE)	
(INCHES)	3119
(MILLIMETERS)	2974
MAXIMUM LINEARITY ERROR (PERCENT)	3120

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3112	AFTER TEST, INSULATION RESISTANCE SHALL BE NOT LESS THAN 3112 MEGOHM(S).
3113	AFTER TEST, FUNCTION ERROR SHALL BE NOT GREATER THAN 3113 PERCENT.
3114	AFTER TEST, ELECTRICAL ERROR SHALL BE NOT GREATER THAN 3114 MINUTE(S).
3115	AFTER TEST, TOTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 3115 MILLIVOLT(S).
3116	AFTER TEST, FUNDAMENTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 3116 MILLIVOLT(S).
3117	AFTER TEST, FRICTION TORQUE SHALL BE NOT GREATER THAN 3117 OUNCE-INCH(S).
2970	AFTER TEST, FRICTION TORQUE SHALL BE NOT GREATER THAN 2970 NEWTON METER(S).
3118	AFTER TEST, RADIAL PLAY SHALL BE NOT GREATER THAN 3118 INCH(S).
2972	AFTER TEST, RADIAL PLAY SHALL BE NOT GREATER THAN 2972 MILLIMETER(S).
3119	AFTER TEST, END PLAY SHALL BE NOT GREATER THAN 3119 INCH(S).
2974	AFTER TEST, END PLAY SHALL BE NOT GREATER THAN 2974 MILLIMETER(S).
3120	AFTER TEST, LINEARITY ERROR SHALL BE NOT GREATER THAN 3120 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6250
PER MIL-STD-202, METHOD 212.	6251
*TEST CONDITION LETTER (SELECT ONE)	
TEST CONDITION LETTER A.	6226
*LEVEL (SELECT ONE)	
20 G'S.	4863
50 G'S.	4864
100 G'S.	4865
TEST CONDITION LETTER B.	6233
*LEVEL (SELECT ONE)	
10,000 G'S.	4868
20,000 G'S.	4892
DIRECTION (SELECT ONE)	
ONE DIRECTION.	1557
BOTH DIRECTIONS.	1558
TEST CONDITION LETTER C.	6239
*LEVEL (G'S.)	4893

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6250	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6250.
6251	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 212 OF MIL-STD-202.
6226	TEST CONDITION LETTER A SHALL APPLY.
4863	THE TEST LEVEL SHALL BE 20 G'S.
4864	THE TEST LEVEL SHALL BE 50 G'S.
4865	THE TEST LEVEL SHALL BE 100 G'S.
6233	TEST CONDITION LETTER B SHALL APPLY.
4868	THE TEST LEVEL SHALL BE 10,000 G'S.
4892	THE TEST LEVEL SHALL BE 20,000 G'S.
1557	THE SPECIMEN SHALL BE ACCELERATED IN ONE DIRECTION ONLY.
1558	THE SPECIMEN SHALL BE ACCELERATED IN BOTH DIRECTIONS.
6239	TEST CONDITION LETTER C SHALL APPLY.
4893	THE TEST LEVEL SHALL BE 4893 G'S.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOUNTING (SELECT ONE)	
MOUNT BY ANY SUITABLE METHOD.	6263
MOUNT BY NORMAL METHOD.	6264
MOUNT BY DOCUMENT (DOC DES)	6265
ALTITUDE (HIGH TEMPERATURE)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2372
OPERATIONAL AT ALTITUDE AND TEMPERATURE.	2374
MINIMUM INSULATION RESISTANCE AT HIGH TEMPERATURE (MEGOHMS)	2377
AFTER TEST, MAXIMUM BRUSH CONTACT RESISTANCE (OHMS)	2376
AFTER TEST, MAXIMUM TEMPERATURE RISE (DEGREES CELSIUS)	2380
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2352
PER MIL-R-23417.	2354
TEST TEMPERATURE (DEGREES CELSIUS)	2356
TEMPERATURE DURATION (HOURS)	2360

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6263	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
6264	MOUNTING SHALL BE BY THE NORMAL METHOD.
6265	MOUNTING SHALL BE IN ACCORDANCE WITH 6265.
2372	ALTITUDE (HIGH TEMPERATURE). REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2372.
2374	ALTITUDE (HIGH TEMPERATURE). RESOLVERS SHALL BE CAPABLE OF OPERATION AT THE SPECIFIED ALTITUDE IN COMBINATION WITH THE SPECIFIED TEMPERATURE.
2377	AFTER HIGH TEMPERATURE STABILIZATION, INSULATION RESISTANCE SHALL BE NOT LESS THAN 2377 MEGOHM(S).
2376	AFTER TESTING, BRUSH CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2376 OHM(S).
2380	AFTER TESTING, TEMPERATURE RISE SHALL BE NOT GREATER THAN 2380 DEGREES CELSIUS.
2352	ALTITUDE (HIGH TEMPERATURE). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2352.
2354	ALTITUDE (HIGH TEMPERATURE). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-23417.
2356	TEST TEMPERATURE SHALL BE 2356 DEGREES CELSIUS.
2360	TEMPERATURE SHALL BE MAINTAINED FOR 2360 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PRESSURE/ALTITUDE (SELECT ONE)	
(INCHES OF MERCURY)	2362
(KILOPASCALS)	2776
ALTITUDE (LOW TEMPERATURE)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2322
OPERATIONAL AT ALTITUDE AND TEMPERATURE.	2324
AFTER TEST MAXIMUM BRUSH CONTACT RESISTANCE (OHMS)	2326
AFTER TEST MINIMUM INSULATION RESISTANCE (MEGOHMS)	2328
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2302
PER MIL-R-23417.	2304
TEST TEMPERATURE (DEGREES CELSIUS)	2306
TEMPERATURE DURATION (HOURS)	2310
PRESSURE/ALTITUDE (SELECT ONE)	
(INCHES OF MERCURY)	2312
(KILOPASCALS)	2778

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2362	PRESSURE SHALL BE REDUCED TO 2362 INCHES OF MERCURY.
2776	PRESSURE SHALL BE REDUCED TO 2776 KILOPASCAL(S).
2322	ALTITUDE (LOW TEMPERATURE). REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2322.
2324	ALTITUDE (LOW TEMPERATURE). RESOLVERS SHALL BE CAPABLE OF OPERATION AT THE SPECIFIED ALTITUDE IN COMBINATION WITH THE SPECIFIED TEMPERATURE.
2326	AFTER TESTING, BRUSH CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2326 OHM(S).
2328	AFTER TESTING, INSULATION RESISTANCE SHALL BE NOT LESS THAN 2328 MEGOHM(S).
2302	ALTITUDE (LOW TEMPERATURE). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2302.
2304	ALTITUDE (LOW TEMPERATURE). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-23417.
2306	TEST TEMPERATURE SHALL BE 2306 DEGREES CELSIUS.
2310	TEMPERATURE SHALL BE MAINTAINED FOR 2310 HOUR(S).
2312	PRESSURE SHALL BE REDUCED TO 2312 INCHES OF MERCURY.
2778	PRESSURE SHALL BE REDUCED TO 2778 KILOPASCAL(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
BRUSH CONTACT RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1644
AS FOLLOWS:	2780
ROTOR CONTINUITY.	1645
MAXIMUM RESISTANCE VARIATION (OHMS)	1646
MAXIMUM ROTOR RESISTANCE CHANGE (PERCENT)	1647
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1641
PER MIL-R-23417.	1642
COMPENSATING WINDINGS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1830
AS FOLLOWS:	2782
MAXIMUM FUNDAMENTAL NULL VOLTAGE (MILLIVOLTS PER VOLT)	1831

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1644	BRUSH CONTACT RESISTANCE. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1644.
2780	BRUSH CONTACT RESISTANCE. REQUIREMENT(S) SHALL BE AS FOLLOWS:
1645	EACH ROTOR WINDING SHALL SHOW CONTINUITY.
1646	VARIATION IN RESISTANCE SHALL BE NOT GREATER THAN 1646 OHM(S).
1647	DC ROTOR RESISTANCE CHANGE SHALL BE NOT GREATER THAN 1647 PERCENT.
1641	BRUSH CONTACT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1641.
1642	BRUSH CONTACT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-23417.
1830	COMPENSATING WINDINGS. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1830.
2782	COMPENSATING WINDINGS. REQUIREMENT(S) SHALL BE AS FOLLOWS:
1831	NULL VOLTAGE FUNDAMENTAL FREQUENCY COMPONENT SHALL BE NOT GREATER THAN 1831 MILLIVOLT(S) (RMS) PER VOLT INPUT (RMS).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM INEQUALITY OF COMPENSATING WINDINGS (MILLIVOLTS)	1833
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1827
PER MIL-R-23417.	1828
COMPENSATING ROTOR OPEN CIRCUIT IMPEDANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2118
AS FOLLOWS:	2784
IMPEDANCE RANGE MINIMUM (OHMS)	2120
* TO MAXIMUM (OHMS)	2122
NOMINAL (OHMS)	2123
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2108
PER MIL-R-23417.	2110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1833	INEQUALITY OF COMPENSATING WINDINGS SHALL BE NOT GREATER THAN 1833 MILLIVOLT(S) (RMS).
1827	COMPENSATING WINDINGS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1827.
1828	COMPENSATING WINDINGS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-23417.
2118	COMPENSATOR ROTOR OPEN CIRCUIT IMPEDANCE. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2118.
2784	COMPENSATOR ROTOR OPEN CIRCUIT IMPEDANCE. REQUIREMENT(S) SHALL BE AS FOLLOWS:
2120 2122	IMPEDANCE SHALL BE NOT LESS THAN 2120 OHM(S) NOR GREATER THAN 2122 OHM(S).
2123	IMPEDANCE SHALL BE 2123 OHM(S).
2108	COMPENSATOR ROTOR OPEN CIRCUIT IMPEDANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2108.
2110	COMPENSATOR ROTOR OPEN CIRCUIT IMPEDANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-23417.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4874
NO EVIDENCE OF FLASHOVER,MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4856
MAXIMUM LEAKAGE (MILLIAMPERES)	4875
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4861
PER MIL-STD-202, METHOD 301.	4862
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4854
(VOLTS, AC)	4855
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	4842
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	4848

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4874	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.
4856	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4875	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4875 MILLIAMPERE(S).
4861	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861.
4862	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.
4854	TEST VOLTAGE SHALL BE 4854 VOLTS, DC.
4855	TEST VOLTAGE SHALL BE 4855 VOLTS, AC.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
4842	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
4848	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
BETWEEN MUTUALLY INSULATED PARTS.	4844
BETWEEN ALL INSULATED PARTS AND GROUND.	4845
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	4846
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4850
DURATION OF VOLTAGE APPLICATION (SECONDS)	4867
MOUNTING PER DOCUMENT (DOC DES)	5000
REGULATION OF TEST VOLTAGE (PERCENT)	4869
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4870
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4717
(MILLIAMPERES)	4897
METHOD OF VOLTAGE CONNECTION PER DOCUMENT (DOC DES)	6267

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4844	BETWEEN MUTUALLY INSULATED PARTS.
4845	BETWEEN ALL INSULATED PARTS AND GROUND.
4846	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
4850	SPECIAL PREPARATION OR CONDITIONS SHALL BE IN ACCORDANCE WITH 4850.
4867	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4867 SECOND(S).
5000	MOUNTING SHALL BE IN ACCORDANCE WITH 5000.
4869	REGULATION OF TEST VOLTAGE SHALL BE WITHIN 4869 PERCENT.
4870	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4870 KILOVOLTAMPERE(S).
4717	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4717 AMPERE(S).
4897	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4897 MILLIAMPERE(S).
6267	METHOD OF CONNECTION OF TEST VOLTAGE SHALL BE IN ACCORDANCE WITH 6267.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
EFFECTIVE ELECTRICAL TRAVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1848
AS FOLLOWS:	2786
MAXIMUM INPHASE OUTPUT (VOLTS)	1850
MAXIMUM OUT-OF-PHASE OUTPUT (VOLTS)	1852
TRAVEL LIMITS (± DEGREES)	1854
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1842
PER MIL-R-50781.	1843
ELECTRICAL ERROR	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1802
MAXIMUM ERROR (MINUTES)	1804

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1848	EFFECTIVE ELECTRICAL TRAVEL. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1848.
2786	EFFECTIVE ELECTRICAL TRAVEL. EFFECTIVE ELECTRICAL TRAVEL SHALL BE AS FOLLOWS:
1850	INPHASE OUTPUT VOLTAGE SHALL BE NOT GREATER THAN 1850 VOLT(S).
1852	OUT-OF-PHASE OUTPUT VOLTAGE SHALL BE NOT GREATER THAN 1852 VOLT(S).
1854	EFFECTIVE ELECTRICAL TRAVEL LIMITS SHALL BE WITHIN PLUS OR MINUS 1854 DEGREE(S).
1842	EFFECTIVE ELECTRICAL TRAVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1842.
1843	EFFECTIVE ELECTRICAL TRAVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-50781.
1802	ELECTRICAL ERROR. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1802.
1804	ELECTRICAL ERROR. ELECTRICAL ERROR SHALL BE NOT GREATER THAN 1804 MINUTE(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1796
PER MIL-R-23417.	1797
PROPORTIONAL VOLTAGE NULLING METHOD.	1798
PROPORTIONAL VOLTAGE GRADIENT METHOD.	1799
ELECTROMAGNETIC INTERFERENCE (RADIO INTERFERENCE)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2474
AS FOLLOWS:	2788
MAXIMUM RADIATED INTERFERENCE (MICROVOLTS)	2475
APPLICABLE FREQUENCY RANGE (MEGAHERTZ)	2476
* TO (MEGAHERTZ)	2477
MAXIMUM CONDUCTED INTERFERENCE PER MIL-STD-462.	2481
APPLICABLE FREQUENCY RANGE (MEGAHERTZ)	2482
* TO (MEGAHERTZ)	2483

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1796	ELECTRICAL ERROR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1796.
1797	ELECTRICAL ERROR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-23417.
1798	PERFORM ELECTRICAL ERROR TEST USING THE PROPORTIONAL VOLTAGE NULLING METHOD.
1799	PERFORM ELECTRICAL ERROR TEST USING THE PROPORTIONAL VOLTAGE GRADIENT METHOD.
2474	ELECTROMAGNETIC INTERFERENCE (RADIO INTERFERENCE). REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2474.
2788	ELECTROMAGNETIC INTERFERENCE (RADIO INTERFERENCE). REQUIREMENT(S) SHALL BE AS FOLLOWS:
2475	RADIATED INTERFERENCE SHALL BE NOT GREATER THAN 2475 MICROVOLT(S).
2476 2477	APPLICABLE FREQUENCY RANGE SHALL BE 2476 MEGAHERTZ TO 2477 MEGAHERTZ.
2481	CONDUCTED RADIO INTERFERENCE SHALL BE NOT IN EXCESS OF LIMITS SPECIFIED IN MIL-STD-462.
2482 2483	APPLICABLE FREQUENCY RANGE SHALL BE 2482 MEGAHERTZ TO 2483 MEGAHERTZ.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2463
PER MIL-R-23417.	2464
ROTOR ROTATION AT (RPM)	2469
INPUT (VOLTS)	2471
TOLERANCE (PERCENT)	2472
END PLAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1680
MAXIMUM END PLAY (INCHES)	1682
MAXIMUM END PLAY (MILLIMETERS)	2800
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1672
PER MIL-R-23417.	1674

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2463	ELECTROMAGNETIC INTERFERENCE (RADIO INTERFERENCE). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2463.
2464	ELECTROMAGNETIC INTERFERENCE (RADIO INTERFERENCE). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-23417.
2469	ROTOR SHALL BE ROTATED AT 2469 REVOLUTIONS PER MINUTE.
2471	RESOLVERS SHALL BE ENERGIZED BY 2471 VOLT(S).
2472	VOLTAGE TOLERANCE SHALL BE 2472 PERCENT.
1680	END PLAY. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1680.
1682	END PLAY. END PLAY SHALL BE NOT GREATER THAN 1682 INCH(S).
2800	END PLAY. END PLAY SHALL BE NOT GREATER THAN 2800 MILLIMETER(S).
1672	END PLAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1672.
1674	END PLAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-23417.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST LOAD (SELECT ONE)	
(POUNDS)	1676
(OUNCES)	1677
(NEWTONS)	2802
ENDURANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2721
RESOLVERS CAPABLE OF CONTINUOUS OPERATION.	2722
AFTER TEST REQUIREMENTS	
MAXIMUM BRUSH CONTACT RESISTANCE (OHMS)	3099
MAXIMUM LEAKAGE CURRENT (MILLIAMPERES)	3100
MINIMUM INSULATION RESISTANCE (MEGOHMS)	3101
MAXIMUM FUNCTION ERROR (PERCENT)	3102
MAXIMUM ELECTRICAL ERROR (MINUTES)	3103
MAXIMUM TOTAL NULL VOLTAGE (MILLIVOLTS)	3104
MAXIMUM FUNDAMENTAL NULL VOLTAGE (MILLIVOLTS)	3105

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1676	TEST LOAD SHALL BE 1676 POUND(S).
1677	TEST LOAD SHALL BE 1677 OUNCE(S).
2802	TEST LOAD SHALL BE 2802 NEWTON(S).
2721	ENDURANCE. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2721.
2722	ENDURANCE. RESOLVERS SHALL BE CAPABLE OF CONTINUOUS OPERATION.
3099	AFTER TEST, BRUSH CONTACT RESISTANCE SHALL BE NOT GREATER THAN 3099 OHM(S).
3100	AFTER TEST, DIELECTRIC WITHSTANDING VOLTAGE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 3100 MILLIAMPERE(S).
3101	AFTER TEST, INSULATION RESISTANCE SHALL BE NOT LESS THAN 3101 MEGOHM(S).
3102	AFTER TEST, FUNCTION ERROR SHALL BE NOT GREATER THAN 3102 PERCENT.
3103	AFTER TEST, ELECTRICAL ERROR SHALL BE NOT GREATER THAN 3103 MINUTE(S).
3104	AFTER TEST, TOTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 3104 MILLIVOLT(S).
3105	AFTER TEST, FUNDAMENTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 3105 MILLIVOLT(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM FRICTION TORQUE (SELECT ONE)	
(OUNCE-INCHES)	3106
(NEWTON METERS)	2810
MAXIMUM RADIAL PLAY (SELECT ONE)	
(INCHES)	3107
(MILLIMETERS)	2812
MAXIMUM END PLAY (SELECT ONE)	
(INCHES)	3108
(MILLIMETERS)	2814
MAXIMUM LINEARITY ERROR (PERCENT)	3109
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2655
PER MIL-R-23417.	2656

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3106	AFTER TEST, FRICTION TORQUE SHALL BE NOT GREATER THAN 3106 OUNCE-INCH(S).
2810	AFTER TEST, FRICTION TORQUE SHALL BE NOT GREATER THAN 2810 NEWTON METER(S).
3107	AFTER TEST, RADIAL PLAY SHALL BE NOT GREATER THAN 3107 INCH(S).
2812	AFTER TEST, RADIAL PLAY SHALL BE NOT GREATER THAN 2812 MILLIMETER(S).
3108	AFTER TEST, END PLAY SHALL BE NOT GREATER THAN 3108 INCH(S).
2814	AFTER TEST, END PLAY SHALL BE NOT GREATER THAN 2814 MILLIMETER(S).
3109	AFTER TEST, LINEARITY ERROR SHALL BE NOT GREATER THAN 3109 PERCENT.
2655	ENDURANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2655.
2656	ENDURANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-23417.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST PARAMETERS PER TABLE	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

ENDURANCE TEST TIME SCHEDULE SHALL BE AS SHOWN IN THE ENDURANCE TEST TIME SCHEDULE TABLE.

ENDURANCE TEST TIME SCHEDULE TABLE

TIME		TEMPERATURE	
	TOLERANCE		TOLERANCE
(HOURS)	(PLUS OR MINUS)	(DEGREES C)	(PLUS OR MINUS)
4400	4401	4402	4403
4407	4408	4409	4410
4414	4415	4416	4417
4421	4422	4423	4424
4428	4429	4430	4431
4435	4436	4437	4438
4442	4443	4444	4445
4449	4450	4451	4452
4456	4457	4458	4459
4463	4464	4465	4466
4470	4471	4472	4473
4477	4478	4479	4480
4484	4485	4486	4487

ENDURANCE TEST TIME SCHEDULE TABLE (CONT.)

	ROTATION	
		TOLERANCE
POSITION	(RPM)	(PLUS OR MINUS)
4404	4405	4406
4411	4412	4413
4418	4419	4420
4425	4426	4427
4432	4433	4434
4439	4440	4441
4446	4447	4448
4453	4454	4455
4460	4461	4462
4467	4468	4469
4474	4475	4476
4481	4482	4483
4488	4489	4490

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
EXPLOSION PROOF	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2642
NO EXPLOSION.	2644
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2625
PER MIL-STD-202, METHOD 109.	2626
CHAMBER TEMPERATURE (DEGREES CELSIUS)	2628
ENERGIZING VOLTAGE (VOLTS)	2632
FRICTION TORQUE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1712

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2642	EXPLOSION PROOF. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2642.
2644	EXPLOSION PROOF. RESOLVERS SHALL BE CAPABLE OF OPERATION IN THE PRESENCE OF AN EXPLOSIVE-GASEOUS MIXTURE WITH AIR WITHOUT CAUSING AN EXPLOSION.
2625	EXPLOSION PROOF. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2625.
2626	EXPLOSION PROOF. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 109 OF MIL-STD-202.
2628	CHAMBER TEMPERATURE SHALL BE 2628 DEGREES CELSIUS.
2632	RESOLVERS SHALL BE ENERGIZED BY 2632 VOLT(S).
1712	FRICTION TORQUE. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1712.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
AS FOLLOWS:	2819
MAXIMUM TORQUE AT TEMPERATURE (SELECT ONE)	
U.S.	
(OUNCE-INCHES)	1714
* AT (DEGREES CELSIUS)	1715
(OUNCE-INCHES)	1716
* AT (DEGREES CELSIUS)	1717
(OUNCE-INCHES)	1718
* AT (DEGREES CELSIUS)	1719
SI	
(NEWTON METERS)	2820
* AT (DEGREES CELSIUS)	2822
(NEWTON METERS)	2824
* AT (DEGREES CELSIUS)	2826
(NEWTON METERS)	2828
* AT (DEGREES CELSIUS)	2830
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1692
PER MIL-R-23417.	1694
TEST LOAD (SELECT ONE)	
(OUNCES)	1696
(NEWTONS)	2832

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2819	FRICTION TORQUE. REQUIREMENT(S) SHALL BE AS FOLLOWS:
1714 1715	TORQUE SHALL BE NOT GREATER THAN 1714 OUNCE-INCH(S) AT 1715 DEGREES CELSIUS.
1716 1717	TORQUE SHALL BE NOT GREATER THAN 1716 OUNCE-INCH(S) AT 1717 DEGREES CELSIUS.
1718 1719	TORQUE SHALL BE NOT GREATER THAN 1718 OUNCE-INCH(S) AT 1719 DEGREES CELSIUS.
2820 2822	TORQUE SHALL BE NOT GREATER THAN 2820 NEWTON METER(S) AT 2822 DEGREES CELSIUS.
2824 2826	TORQUE SHALL BE NOT GREATER THAN 2824 NEWTON METER(S) AT 2826 DEGREES CELSIUS.
2828 2830	TORQUE SHALL BE NOT GREATER THAN 2828 NEWTON METER(S) AT 2830 DEGREES CELSIUS.
1692	FRICTION TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH BASE DOCUMENT, EXCEPT 1692.
1694	FRICTION TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-23417.
1696	TEST LOAD SHALL BE 1696 OUNCE(S).
2832	TEST LOAD SHALL BE 2832 NEWTON(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST TEMPERATURE 1 (DEGREES CELSIUS)	1700
TEST TEMPERATURE 2 (DEGREES CELSIUS)	1702
TEST TEMPERATURE 3 (DEGREES CELSIUS)	1706
FUNCTION ERROR	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2736
MAXIMUM ERROR (± PERCENT OF MAXIMUM OUTPUT)	2737
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2733
PER MIL-R-23417.	2734
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4760
FUNGUS RESISTANT BY CERTIFICATION OR BY TEST.	4761

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1700	TEST TEMPERATURE NO.1 SHALL BE 1700 DEGREES CELSIUS.
1702	TEST TEMPERATURE NO.2 SHALL BE 1702 DEGREES CELSIUS.
1706	TEST TEMPERATURE NO.3 SHALL BE 1706 DEGREES CELSIUS.
2736	FUNCTION ERROR. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2736.
2737	FUNCTION ERROR. FUNCTION ERROR SHALL BE NOT GREATER THAN PLUS OR MINUS 2737 PERCENT OF MAXIMUM OUTPUT.
2733	FUNCTION ERROR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2733.
2734	FUNCTION ERROR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-23417.
4760	FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.
4761	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED, THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NO EVIDENCE OF FUNGUS GROWTH WHEN TESTED.	4762
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4754
PER MIL-STD-810, METHOD 508.	4755
TEST PERIOD (DAYS)	4756
HARMONIC DISTORTION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1888
MAXIMUM DISTORTION (PERCENT)	1892
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1882
PER MIL-R-23417.	1884
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4798

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4762	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4754	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.
4755	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.
4756	TEST PERIOD SHALL BE 4756 DAY(S).
1888	HARMONIC DISTORTION. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1888.
1892	HARMONIC DISTORTION. HARMONIC DISTORTION SHALL BE NOT GREATER THAN 1892 PERCENT.
1882	HARMONIC DISTORTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1882.
1884	HARMONIC DISTORTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-23417.
4798	HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	4799
NO DEGRADATION OF PERFORMANCE.	4815
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1477
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	4795
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	4805
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	4813
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	4803
DURING TEST, MAXIMUM ANGULAR DEVIATION (SECONDS)	2980
AFTER TEST REQUIREMENTS	
MAXIMUM BRUSH CONTACT RESISTANCE (OHMS)	3088
MAXIMUM FRICTION ERROR (PERCENT)	3091
MAXIMUM ELECTRICAL ERROR (MINUTES)	3092
MAXIMUM TOTAL NULL VOLTAGE (MILLIVOLTS)	3093

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4799	HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
4815	THERE SHALL BE NO DEGRADATION OF PERFORMANCE.
1477	THERE SHALL BE NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DIELECTRIC WITHSTANDING VOLTAGE IS PERFORMED.
4795	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4795 MEGOHM(S) AT HIGH HUMIDITY.
4805	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4805 MEGOHM(S) AFTER DRYING.
4813	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4813 MILLIAMPERE(S) AT HIGH HUMIDITY.
4803	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4803 MILLIAMPERE(S) AFTER DRYING.
2980	DURING TEST, ANGULAR DEVIATION SHALL BE NOT GREATER THAN 2980 SECOND(S).
3088	AFTER TEST, BRUSH CONTACT RESISTANCE SHALL BE NOT GREATER THAN 3088 OHM(S).
3091	AFTER TEST, FUNCTION ERROR SHALL BE NOT GREATER THAN 3091 PERCENT.
3092	AFTER TEST, ELECTRICAL ERROR SHALL BE NOT GREATER THAN 3092 MINUTE(S).
3093	AFTER TEST, TOTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 3093 MILLIVOLT(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM FUNDAMENTAL NULL VOLTAGE (MILLIVOLTS)	3094
MAXIMUM FRICTION TORQUE (SELECT ONE)	
(OUNCE-INCHES)	3095
(NEWTON METERS)	2982
MAXIMUM RADIAL PLAY (SELECT ONE)	
(INCHES)	3096
(MILLIMETERS)	2984
MAXIMUM END PLAY (SELECT ONE)	
(INCHES)	3097
(MILLIMETERS)	2986
MAXIMUM LINEARITY ERROR (PERCENT)	3098
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4788
PER MIL-STD-202, METHOD 103.	4853
*TEST CONDITION (LETTER)	4890

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3094	AFTER TEST, FUNDAMENTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 3094 MILLIVOLT(S).
3095	AFTER TEST, FRICTION TORQUE SHALL BE NOT GREATER THAN 3095 OUNCE-INCH(S).
2982	AFTER TEST, FRICTION TORQUE SHALL BE NOT GREATER THAN 2982 NEWTON METER(S).
3096	AFTER TEST, RADIAL PLAY SHALL BE NOT GREATER THAN 3096 INCH(S).
2984	AFTER TEST, RADIAL PLAY SHALL BE NOT GREATER THAN 2984 MILLIMETER(S).
3097	AFTER TEST, END PLAY SHALL BE NOT GREATER THAN 3097 INCH(S).
2986	AFTER TEST, END PLAY SHALL BE NOT GREATER THAN 2986 MILLIMETER(S).
3098	AFTER TEST, LINEARITY ERROR SHALL BE NOT GREATER THAN 3098 PERCENT.
4788	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.
4853	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 103 OF MIL-STD-202.
4890	TEST CONDITION LETTER 4890 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	6207
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	6206
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1380
AS FOLLOWS:	6359
*MINIMUM INSULATION RESISTANCE (SELECT ONE)	
SINGLE TEST	
(MEGOHMS)	1386
MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	1384
*SECOND TEST (MEGOHMS)	1387
NO EVIDENCE OF PHYSICAL DAMAGE.	1407
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1371

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6207	THE DIELECTRIC WITHSTANDING VOLTAGE TEST SHALL BE PERFORMED AT HIGH HUMIDITY.
6206	THE DIELECTRIC WITHSTANDING VOLTAGE TEST SHALL BE PERFORMED AFTER DRYING.
1380	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.
6359	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1386	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1386 MEGOHM(S).
1384	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1384 MEGOHM(S) AT THE FIRST TEST TEMPERATURE.
1387	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1387 MEGOHM(S) AT THE SECOND TEST TEMPERATURE.
1407	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1371	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PER MIL-STD-202, METHOD 302.	1511
*CONDITION (SELECT ONE)	
TEST CONDITION (LETTER)	1378
TEST VOLTAGE (VOLTS, DC)	1373
ELECTRIFICATION TIME (SECONDS)	1376
MAXIMUM MEASUREMENT ERROR AT REQUIRED VALUE (PERCENT)	1377
POINTS OF MEASUREMENT	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	1497
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	1498
BETWEEN MUTUALLY INSULATED PARTS.	1522
BETWEEN INSULATED PARTS AND GROUND.	1523
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	1524
SPECIAL PREPARATIONS OR CONDITIONS PER DOCUMENT (DOC DES)	1520
FIRST TEST TEMPERATURE (DEGREES CELSIUS)	1372
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	1381

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1511	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 302 OF MIL-STD-202.
1378	TEST CONDITION LETTER 1378 SHALL APPLY.
1373	TEST POTENTIAL SHALL BE 1373 VOLTS, DC.
1376	ELECTRIFICATION DURATION SHALL BE 1376 SECOND(S).
1377	MEASUREMENT ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1377 PERCENT.
	POINTS OF INSULATION RESISTANCE MEASUREMENT SHALL BE AS FOLLOWS:
1497	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
1498	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
1522	BETWEEN MUTUALLY INSULATED PARTS.
1523	BETWEEN ALL INSULATED PARTS AND GROUND.
1524	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
1520	SPECIAL PREPARATIONS OR CONDITIONS SHALL BE IN ACCORDANCE WITH 1520.
1372	FIRST TEST TEMPERATURE SHALL BE 1372 DEGREES CELSIUS.
1381	SECOND TEST TEMPERATURE SHALL BE 1381 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INTERAXIS ERROR	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2131
MAXIMUM ERROR (± MINUTES)	2132
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2128
PER MIL-R-23417.	2129
INTERNAL CAPACITIES	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2765
AS FOLLOWS:	2850
MAXIMUM CAPACITY ROTOR TO FRAME (PICOFARADS)	2766
MAXIMUM CAPACITY BETWEEN ROTOR WINDINGS (PICOFARADS)	2767
MAXIMUM CAPACITY STATOR TO FRAME (PICOFARADS)	2768
MAXIMUM CAPACITY BETWEEN STATOR WINDINGS (PICOFARADS)	2769

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
2131	INTERAXIS ERROR. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2131.
2132	INTERAXIS ERROR. INTERAXIS ERROR SHALL BE NOT GREATER THAN PLUS OR MINUS 2132 MINUTE(S).
2128	INTERAXIS ERROR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2128.
2129	INTERAXIS ERROR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-23417.
2765	INTERNAL CAPACITIES. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2765.
2850	INTERNAL CAPACITIES. REQUIREMENT(S) SHALL BE AS FOLLOWS:
2766	CAPACITY FROM ROTOR WINDING TO FRAME SHALL BE NOT GREATER THAN 2766 PICOFARAD(S).
2767	CAPACITY BETWEEN ROTOR WINDINGS SHALL BE NOT GREATER THAN 2767 PICOFARAD(S).
2768	CAPACITY FROM STATOR WINDING TO FRAME SHALL BE NOT GREATER THAN 2768 PICOFARAD(S).
2769	CAPACITY BETWEEN STATOR WINDINGS SHALL BE NOT GREATER THAN 2769 PICOFARAD(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2761
PER MIL-R-21530.	2762
LINEARITY ERROR	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1876
ERROR WITHIN (PERCENT)	1878
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1870
PER MIL-R-50781.	1871
MOISTURE RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1400
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAMGE.	1396
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1394

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2761	INTERNAL CAPACITIES. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2761.
2762	INTERNAL CAPACITIES. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-21530.
1876	LINEARITY ERROR. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1876.
1878	LINEARITY ERROR. LINEARITY ERROR SHALL BE WITHIN 1878 PERCENT.
1870	LINEARITY ERROR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1870.
1871	LINEARITY ERROR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-50781.
1400	MOISTURE RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1400.
1396	MOISTURE RESISTANCE. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
1394	THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING OR INSULATION BREAKDOWN, WHEN DIELECTRIC WITHSTANDING VOLTAGE IS APPLIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	1429
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	1404
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	1432
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	1406
AFTER TEST REQUIREMENTS	
MAXIMUM BRUSH CONTACT RESISTANCE (OHMS)	3000
MAXIMUM FUNCTION ERROR (PERCENT)	3003
MAXIMUM ELECTRICAL ERROR (MINUTES)	3004
MAXIMUM TOTAL NULL VOLTAGE (MILLIVOLTS)	3005
MAXIMUM FUNDAMENTAL NULL VOLTAGE (MILLIVOLTS)	3006
MAXIMUM FRICTION TORQUE (SELECT ONE)	
(OUNCE-INCHES)	3007
(NEWTON METERS)	3200

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1429	CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1429 MILLIAMPERE(S) AT HIGH HUMIDITY.
1404	CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1404 MILLIAMPERE(S) AFTER DRYING.
1432	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1432 MEGOHM(S) AT HIGH HUMIDITY.
1406	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1406 MEGOHM(S) AFTER DRYING.
3000	AFTER TEST, BRUSH CONTACT RESISTANCE SHALL BE NOT GREATER THAN 3000 OHM(S).
3003	AFTER TEST, FUNCTION ERROR SHALL BE NOT GREATER THAN 3003 PERCENT.
3004	AFTER TEST, ELECTRICAL ERROR SHALL BE NOT GREATER THAN 3004 MINUTE(S).
3005	AFTER TEST, TOTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 3005 MILLIVOLT(S).
3006	AFTER TEST, FUNDAMENTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 3006 MILLIVOLT(S).
3007	AFTER TEST, FRICTION TORQUE SHALL BE NOT GREATER THAN 3007 OUNCE-INCH(S).
3200	AFTER TEST, FRICTION TORQUE SHALL BE NOT GREATER THAN 3200 NEWTON METER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM RADIAL PLAY (SELECT ONE)	
(INCHES)	3008
(MILLIMETERS)	3202
MAXIMUM END PLAY (SELECT ONE)	
(INCHES)	3009
(MILLIMETERS)	3204
MAXIMUM LINEARITY ERROR (PERCENT)	3010
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1391
PER MIL-STD-202, METHOD 106.	1397
STEP 7A NOT APPLICABLE.	4985
STEP 7B NOT APPLICABLE.	4986
MOUNT PER DOCUMENT (DOC DES)	1449
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	4983
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	4984

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3008	AFTER TEST, RADIAL PLAY SHALL BE NOT GREATER THAN 3008 INCH(S).
3202	AFTER TEST, RADIAL PLAY SHALL BE NOT GREATER THAN 3202 MILLIMETER(S).
3009	AFTER TEST, END PLAY SHALL BE NOT GREATER THAN 3009 INCH(S).
3204	AFTER TEST, END PLAY SHALL BE NOT GREATER THAN 3204 MILLIMETER(S).
3010	AFTER TEST, LINEARITY ERROR SHALL BE NOT GREATER THAN 3010 PERCENT.
1391	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1391.
1397	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 106 OF MIL-STD-202.
4985	STEP 7A OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
4986	STEP 7B OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
1449	MOUNTING SHALL BE IN ACCORDANCE WITH 1449.
4983	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.
4984	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NULL VOLTAGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1822
AS FOLLOWS:	2860
MAXIMUM TOTAL NULL VOLTAGE (MILLIVOLTS)	1824
MAXIMUM FUNDAMENTAL NULL VOLTAGE (MILLIVOLTS)	1825
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1812
PER MIL-R-23417.	1814
FREQUENCY-SENSITIVE VOLTMETER METHOD.	1815
PHASE-SENSITIVE VOLTMETER METHOD.	1816

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1822	NULL VOLTAGE. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1822.
2860	NULL VOLTAGE. REQUIREMENT(S) SHALL BE AS FOLLOWS:
1824	TOTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 1824 MILLIVOLT(S).
1825	FUNDAMENTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 1825 MILLIVOLT(S).
1812	NULL VOLTAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1812.
1814	NULL VOLTAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-23417.
1815	PERFORM NULL VOLTAGE TEST USING THE FREQUENCY-SENSITIVE VOLTMETER METHOD.
1816	PERFORM NULL VOLTAGE TEST USING THE PHASE-SENSITIVE VOLTMETER METHOD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PHASE SHIFT VARIATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1784
AS FOLLOWS:	2870
SHIFT DUE TO ROTATION WITHIN (DEGREES)	1786
SHIFT DUE TO ROTATION WITHIN (MINUTES)	1788
SHIFT DUE TO VOLTAGE WITHIN (DEGREES)	1789
SHIFT DUE TO VOLTAGE WITHIN (MINUTES)	1794
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1780
PER MIL-R-23417.	1781
PRIMARY CURRENT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1724
MAXIMUM PRIMARY CURRENT (MILLIAMPERES)	1726

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1784	PHASE SHIFT VARIATION. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1784.
2870	PHASE SHIFT VARIATION. PHASE SHIFT SHALL BE AS FOLLOWS:
1786	PHASE SHIFT DUE TO ROTATION SHALL BE WITHIN PLUS OR MINUS 1786 DEGREE(S).
1788	PHASE SHIFT DUE TO ROTATION SHALL BE WITHIN PLUS OR MINUS 1788 MINUTE(S)
1789	PHASE SHIFT DUE TO VOLTAGE SHALL BE WITHIN PLUS OR MINUS 1789 DEGREE(S).
1794	PHASE SHIFT DUE TO VOLTAGE SHALL BE WITHIN PLUS OR MINUS 1794 MINUTE(S).
1780	PHASE SHIFT VARIATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1780.
1781	PHASE SHIFT VARIATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-23417.
1724	PRIMARY CURRENT. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1724.
1726	PRIMARY CURRENT. PRIMARY CURRENT SHALL BE NOT GREATER THAN 1726 MILLIAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NOMINAL PRIMARY CURRENT (MILLIAMPERES)	1727
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1721
PER MIL-R-23417.	1722
PRIMARY POWER (ENERGIZING POWER)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1746
MAXIMUM POWER (WATTS)	1748
NOMINAL POWER (WATTS)	1749
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1736
PER MIL-R-23417.	1738

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1727	PRIMARY CURRENT. PRIMARY CURRENT SHALL BE 1727 MILLIAMPERE(S).
1721	PRIMARY CURRENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1721.
1722	PRIMARY CURRENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-23417.
1746	PRIMARY POWER (ENERGIZING POWER). REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1746.
1748	PRIMARY POWER (ENERGIZING POWER). PRIMARY POWER SHALL BE NOT GREATER THAN 1748 WATT(S).
1749	PRIMARY POWER (ENERGIZING POWER). PRIMARY POWER SHALL BE 1749 WATT(S).
1736	PRIMARY POWER (ENERGIZING POWER). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1736.
1738	PRIMARY POWER (ENERGIZING POWER). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-23417.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RADIAL PLAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1660
MAXIMUM RADIAL PLAY (INCHES TIR)	1662
MAXIMUM RADIAL PLAY (MILLIMETERS TIR)	2880
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1652
PER MIL-R-23417.	1654
TEST LOAD (SELECT ONE)	
(POUNDS)	1655
(NEWTONS)	2882
ROTOR OPEN CIRCUIT IMPEDANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2038

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1660	RADIAL PLAY. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1660.
1662	RADIAL PLAY. RADIAL PLAY SHALL BE NOT GREATER THAN 1662 INCH(S) TOTAL INDICATOR READING.
2880	RADIAL PLAY. RADIAL PLAY SHALL BE NOT GREATER THAN 2880 MILLIMETER(S) TOTAL INDICATOR READING.
1652	RADIAL PLAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1652.
1654	RADIAL PLAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-23417.
1655	TEST LOAD SHALL BE 1655 POUND(S).
2882	TEST LOAD SHALL BE 2882 NEWTON(S).
2038	ROTOR OPEN CIRCUIT IMPEDANCE. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2038.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
AS FOLLOWS:	2890
IMPEDANCE RANGE	
*MINIMUM (OHMS)	2040
*TO MAXIMUM (OHMS)	2042
NOMINAL IMPEDANCE (OHMS)	2043
IMPEDANCE ANGLE RANGE	
*MINIMUM (DEGREES)	2045
*TO MAXIMUM (DEGREES)	2046
MAXIMUM IMPEDANCE ANGLE (DEGREES)	2044
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2026
PER MIL-R-23417.	2028

ROTOR SHORT CIRCUIT IMPEDANCE

REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2010
AS FOLLOWS:	2896
IMPEDANCE RANGE	
*MINIMUM (OHMS)	2012
*TO MAXIMUM (OHMS)	2014

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2890	ROTOR OPEN CIRCUIT IMPEDANCE. REQUIREMENT(S) SHALL BE AS FOLLOWS:
2040 2042	IMPEDANCE SHALL BE NOT LESS THAN 2040 OHM(S) NOR GREATER THAN 2042 OHM(S).
2043	IMPEDANCE SHALL BE 2043 OHM(S).
2045 2046	IMPEDANCE ANGLE SHALL BE NOT LESS THAN 2045 DEGREE(S) NOR GREATER THAN 2046 DEGREE(S).
2044	IMPEDANCE ANGLE SHALL BE NOT GREATER THAN 2044 DEGREE(S).
2026	ROTOR OPEN CIRCUIT IMPEDANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2026.
2028	ROTOR OPEN CIRCUIT IMPEDANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-23417.
2010	ROTOR SHORT CIRCUIT IMPEDANCE. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2010.
2896	ROTOR SHORT CIRCUIT IMPEDANCE. REQUIREMENT(S) SHALL BE AS FOLLOWS:
2012 2014	IMPEDANCE SHALL BE NOT LESS THAN 2012 OHM(S) NOR GREATER THAN 2014 OHM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NOMINAL IMPEDANCE (OHMS)	2015
IMPEDANCE ANGLE RANGE	
*MINIMUM (DEGREES)	2017
*TO MAXIMUM (DEGREES)	2018
MAXIMUM IMPEDANCE ANGLE (DEGREES)	2016
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2002
PER MIL-R-23417.	2004
SALT SPRAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4878
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE.	4782
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4770
PER MIL-STD-202, METHOD 101.	4771
*TEST CONDITION (LETTER)	4772

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2015	IMPEDANCE SHALL BE 2015 OHM(S).
2017 2018	IMPEDANCE ANGLE SHALL BE NOT LESS THAN 2017. DEGREE(S) NOR GREATER THAN 2018 DEGREE(S).
2016	IMPEDANCE ANGLE SHALL BE NOT GREATER THAN 2016 DEGREE(S).
2002	ROTOR SHORT CIRCUIT IMPEDANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2002.
2004	ROTOR SHORT CIRCUIT IMPEDANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-23417.
4878	SALT SPRAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4878.
4782	SALT SPRAY. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
4770	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4770.
4771	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 101 OF MIL-STD-202.
4772	TEST CONDITION LETTER 4772 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOUNTING (SELECT ONE)	
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4773
MOUNTING SHALL BE BY NORMAL METHOD.	4765
MOUNTING SHALL BE BY ANY SUITABLE METHOD.	4766
SHOCK, HIGH IMPACT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1494
NO EVIDENCE OF PHYSICAL DAMAGE.	1495
AFTER TEST REQUIREMENTS	
MAXIMUM BRUSH CONTACT RESISTANCE (OHMS)	3055
MAXIMUM LEAKAGE CURRENT (MILLIAMPERES)	3056
MINIMUM INSULATION RESISTANCE (MEGOHMS)	3057
MAXIMUM FUNCTION ERROR (PERCENT)	3058
MAXIMUM ELECTRICAL ERROR (MINUTES)	3059
MAXIMUM TOTAL NULL VOLTAGE (MILLIVOLTS)	3060

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4773	MOUNTING SHALL BE IN ACCORDANCE WITH 4773.
4765	MOUNTING SHALL BE BY THE NORMAL METHOD.
4766	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
1494	SHOCK, HIGH IMPACT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1494.
1495	SHOCK, HIGH IMPACT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
3055	AFTER TEST, BRUSH CONTACT RESISTANCE SHALL BE NOT GREATER THAN 3055 OHM(S).
3056	AFTER TEST, DIELECTRIC WITHSTANDING VOLTAGE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 3056 MILLIAMPERE(S).
3057	AFTER TEST, INSULATION RESISTANCE SHALL BE NOT LESS THAN 3057 MEGOHM(S).
3058	AFTER TEST, FUNCTION ERROR SHALL BE NOT GREATER THAN 3058 PERCENT.
3059	AFTER TEST, ELECTRICAL ERROR SHALL BE NOT GREATER THAN 3059 MINUTE(S).
3060	AFTER TEST, TOTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 3060 MILLIVOLT(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM FUNDAMENTAL NULL VOLTAGE (MILLIVOLTS)	3061
MAXIMUM FRICTION TORQUE (SELECT ONE)	
(OUNCE-INCHES)	3062
(NEWTON METERS)	3210
MAXIMUM RADIAL PLAY (SELECT ONE)	
(INCHES)	3063
(MILLIMETERS)	3212
MAXIMUM END PLAY (SELECT ONE)	
(INCHES)	3064
(MILLIMETERS)	3214
MAXIMUM LINEARITY ERROR (PERCENT)	3065
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1486
PER MIL-STD-202, METHOD 207.	1482

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3061	AFTER TEST, FUNDAMENTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 3061 MILLIVOLT(S).
3062	AFTER TEST, FRICTION TORQUE SHALL BE NOT GREATER THAN 3062 OUNCE-INCH(S).
3210	AFTER TEST, FRICTION TORQUE SHALL BE NOT GREATER THAN 3210 NEWTON METER(S).
3063	AFTER TEST, RADIAL PLAY SHALL BE NOT GREATER THAN 3063 INCH(S).
3212	AFTER TEST, RADIAL PLAY SHALL BE NOT GREATER THAN 3212 MILLIMETER(S).
3064	AFTER TEST, END PLAY SHALL BE NOT GREATER THAN 3064 INCH (S).
3214	AFTER TEST, END PLAY SHALL BE NOT GREATER THAN 3214 MILLIMETER(S).
3065	AFTER TEST, LINEARITY ERROR SHALL BE NOT GREATER THAN 3065 PERCENT.
1486	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1486.
1482	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 207 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*MOUNTING FIXTURE (SELECT ONE)	
FIGURE NUMBER FROM MIL-STD-202, METHOD 207 (NUMBER)	1488
ANY SUITABLE MOUNTING FIXTURE.	1478
MOUNTING FIXTURE PER DOCUMENT (DOC DES)	1468
SHOCK, SPECIFIED PULSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1508
NO EVIDENCE OF PHYSICAL DAMAGE.	1509
AFTER TEST REQUIREMENTS	
MAXIMUM BRUSH CONTACT RESISTANCE (OHMS)	3066
MAXIMUM LEAKAGE CURRENT (MILLIAMPERES)	3067
MINIMUM INSULATION RESISTANCE (MEGOHMS)	3068
MAXIMUM FUNCTION ERROR (PERCENT)	3069
MAXIMUM ELECTRICAL ERROR (MINUTES)	3070
MAXIMUM TOTAL NULL VOLTAGE (MILLIVOLTS)	3071

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1488	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH FIGURE 1488 OF METHOD 207 OF MIL-STD-202.
1478	THE MOUNTING FIXTURE SHALL BE ANY SUITABLE MOUNTING FIXTURE.
1468	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH 1468.
1508	SHOCK, SPECIFIED PULSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1508.
1509	SHOCK, SPECIFIED PULSE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
3066	AFTER TEST, BRUSH CONTACT RESISTANCE SHALL BE NOT GREATER THAN 3066 OHM(S).
3067	AFTER TEST, DIELECTRIC WITHSTANDING VOLTAGE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 3067 MILLIAMPERE(S).
3068	AFTER TEST, INSULATION RESISTANCE SHALL BE NOT LESS THAN 3068 MEGOHM(S).
3069	AFTER TEST, FUNCTION ERROR SHALL BE NOT GREATER THAN 3069 PERCENT.
3070	AFTER TEST, ELECTRICAL ERROR SHALL BE NOT GREATER THAN 3070 MINUTE(S).
3071	AFTER TEST, TOTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 3071 MILLIVOLT(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM FUNDAMENTAL NULL VOLTAGE (MILLIVOLTS)	3072
MAXIMUM FRICTION TORQUE (SELECT ONE)	
(OUNCE-INCHES)	3073
(NEWTON METERS)	3220
MAXIMUM RADIAL PLAY (SELECT ONE)	
(INCHES)	3074
(MILLIMETERS)	3222
MAXIMUM END PLAY (SELECT ONE)	
(INCHES)	3075
(MILLIMETERS)	3224
MAXIMUM LINEARITY ERROR (PERCENT)	3076
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1502
PER MIL-STD-202, METHOD 213.	1500
*TEST CONDITION (LETTER)	1504

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3072	AFTER TEST, FUNDAMENTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 3072 MILLIVOLT(S).
3073	AFTER TEST, FRICTION TORQUE SHALL BE NOT GREATER THAN 3073 OUNCE-INCH(S).
3220	AFTER TEST, FRICTION TORQUE SHALL BE NOT GREATER THAN 3220 NEWTON METER(S).
3074	AFTER TEST, RADIAL PLAY SHALL BE NOT GREATER THAN 3074 INCH(S).
3222	AFTER TEST, RADIAL PLAY SHALL BE NOT GREATER THAN 3222 MILLIMETER(S).
3075	AFTER TEST, END PLAY SHALL BE NOT GREATER THAN 3075 INCH(S).
3224	AFTER TEST, END PLAY SHALL BE NOT GREATER THAN 3224 MILLIMETER(S).
3076	AFTER TEST, LINEARITY ERROR SHALL BE NOT GREATER THAN 3076 PERCENT.
1502	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1502.
1500	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 213 OF MIL-STD-202.
1504	TEST CONDITION LETTER 1504 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	4686
NORMAL MOUNTING METHOD.	4685
MOUNT PER DOCUMENT (DOC DES)	4684
STATOR OPEN CIRCUIT IMPEDANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2092
AS FOLLOWS:	2900
IMPEDANCE RANGE	
*MINIMUM (OHMS)	2094
*TO MAXIMUM (OHMS)	2095
NOMINAL IMPEDANCE (OHMS)	2096
IMPEDANCE ANGLE RANGE	
*MINIMUM (DEGREES)	2098
*TO MAXIMUM (DEGREES)	2099
MAXIMUM IMPEDANCE ANGLE (DEGREES)	2097
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2082
PER MIL-R-23417.	2084

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4686	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4685	MOUNTING SHALL BE BY THE NORMAL METHOD.
4684	MOUNTING SHALL BE IN ACCORDANCE WITH 4684.
2092	STATOR OPEN CIRCUIT IMPEDANCE. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2092.
2900	STATOR OPEN CIRCUIT IMPEDANCE. REQUIREMENT(S) SHALL BE AS FOLLOWS:
2094 2095	IMPEDANCE SHALL BE NOT LESS THAN 2094 OHM(S) NOR GREATER THAN 2095 OHM(S).
2096	IMPEDANCE SHALL BE 2096 OHM(S).
2098 2099	IMPEDANCE ANGLE SHALL BE NOT LESS THAN 2098 DEGREE(S) NOR GREATER THAN 2099 DEGREE(S).
2097	IMPEDANCE ANGLE SHALL BE NOT GREATER THAN 2097 DEGREE(S).
2082	STATOR OPEN CIRCUIT IMPEDANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2082.
2084	STATOR OPEN CIRCUIT IMPEDANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-23417.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STATOR SHORT CIRCUIT IMPEDANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2066
AS FOLLOWS:	2910
IMPEDANCE RANGE	
*MINIMUM (OHMS)	2068
*TO MAXIMUM (OHMS)	2070
NOMINAL (OHMS)	2071
IMPEDANCE ANGLE RANGE	
*MINIMUM (DEGREES)	2073
*TO MAXIMUM (DEGREES)	2074
MAXIMUM IMPEDANCE ANGLE (DEGREES)	2072
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2056
PER MIL-R-23417.	2058

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2066	STATOR SHORT CIRCUIT IMPEDANCE. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2066.
2910	STATOR SHORT CIRCUIT IMPEDANCE. REQUIREMENT(S) SHALL BE AS FOLLOWS:
2068 2070	IMPEDANCE SHALL BE NOT LESS THAN 2068 OHM(S) NOR GREATER THAN 2070 OHM(S).
2071	IMPEDANCE SHALL BE 2071 OHM(S).
2073 2074	IMPEDANCE ANGLE SHALL BE NOT LESS THAN 2073 DEGREE(S) NOR GREATER THAN 2074 DEGREE(S).
2072	IMPEDANCE ANGLE SHALL BE NOT GREATER THAN 2072 DEGREE(S).
2056	STATOR SHORT CIRCUIT IMPEDANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2056.
2058	STATOR SHORT CIRCUIT IMPEDANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-23417.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHIFT OF RESOLVER ZERO	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1986
AS FOLLOWS:	2920
MAXIMUM SHIFT WITH VOLTAGE (± MINUTES)	1988
MAXIMUM SHIFT WITH FREQUENCY (± MINUTES)	1990
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1972
PER MIL-R-23417.	1974
TEMPERATURE RISE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2421
MAXIMUM TEMPERATURE RISE (DEGREES CELSIUS)	2422

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1986	SHIFT OF RESOLVER ZERO. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1986.
2920	SHIFT OF RESOLVER ZERO. REQUIREMENT(S) SHALL BE AS FOLLOWS:
1988	SHIFT OF RESOLVER ZERO WITH VOLTAGE SHALL BE NOT GREATER THAN PLUS OR MINUS 1988 MINUTE(S).
1990	SHIFT OF RESOLVER ZERO WITH FREQUENCY SHALL BE NOT GREATER THAN PLUS OR MINUS 1990 MINUTE(S).
1972	SHIFT OF RESOLVER ZERO. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1972.
1974	SHIFT OF RESOLVER ZERO. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-23417.
2421	TEMPERATURE RISE. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2421.
2422	TEMPERATURE RISE. TEMPERATURE RISE SHALL BE NOT GREATER THAN 2422 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2401
PER MIL-R-23417.	2402
ENCLOSURE PERIOD (HOURS)	2412
TEMPERATURE HIGH (AMBIENT AND OPERATIONAL)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2266
NO EVIDENCE OF DAMAGE OR DEGRADATION.	2268
MEASUREMENTS AT TEMPERATURE	
MAXIMUM BRUSH CONTACT RESISTANCE (OHMS)	2270
MAXIMUM LEAKAGE CURRENT (MILLIAMPERES)	2284
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2286
MAXIMUM FUNCTION ERROR (PERCENT)	2278
MAXIMUM ELECTRICAL ERROR (MINUTES)	2272

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2401	TEMPERATURE RISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2401.
2402	TEMPERATURE RISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-23417.
2412	PERIOD OF ENCLOSURE SHALL BE 2412 HOUR(S).
2266	TEMPERATURE, HIGH (AMBIENT AND OPERATIONAL). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2266.
2268	TEMPERATURE, HIGH (AMBIENT AND OPERATIONAL). THE RESOLVERS SHALL SHOW NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
2270	AFTER TEMPERATURE STABILIZATION, BRUSH CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2270 OHM(S).
2284	AFTER TEMPERATURE STABILIZATION, LEAKAGE CURRENT SHALL BE NOT GREATER THAN 2284 MILLIAMPERE(S).
2286	AFTER TEMPERATURE STABILIZATION, INSULATION RESISTANCE SHALL BE NOT LESS THAN 2286 MEGOHM(S).
2278	AFTER TEMPERATURE STABILIZATION, FUNCTION ERROR SHALL BE NOT GREATER THAN 2278 PERCENT.
2272	AFTER TEMPERATURE STABILIZATION, ELECTRICAL ERROR SHALL BE NOT GREATER THAN 2272 MINUTE(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM TOTAL NULL VOLTAGE (MILLIVOLTS)	2274
MAXIMUM FUNDAMENTAL NULL VOLTAGE (MILLIVOLTS)	2276
MAXIMUM FRICTION TORQUE (SELECT ONE)	
(OUNCE-INCHES)	2282
(NEWTON METERS)	2950
MAXIMUM LINEARITY ERROR (PERCENT)	2287
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2242.
PER MIL-R-23417.	2244
INITIAL TEMPERATURE (DEGREES CELSIUS)	2246
TEMPERATURE DURATION (HOURS)	2250
INCREASED TEMPERATURE (DEGREES CELSIUS)	2252
TEMPERATURE DURATION (DEGREES CELSIUS)	2256
TEMPERATURE LOW (AMBIENT AND OPERATIONAL)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2210

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2274	AFTER TEMPERATURE STABILIZATION, TOTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 2274 MILLIVOLT(S).
2276	AFTER TEMPERATURE STABILIZATION, FUNDAMENTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 2276 MILLIVOLT(S).
2282	AFTER TEMPERATURE STABILIZATION, FRICTION TORQUE SHALL BE NOT GREATER THAN 2282 OUNCE-INCH(S).
2950	AFTER TEMPERATURE STABILIZATION, FRICTION TORQUE SHALL BE NOT GREATER THAN 2950 NEWTON METER(S).
2287	AFTER TEMPERATURE STABILIZATION, LINEARITY ERROR SHALL BE NOT GREATER THAN 2287 PERCENT.
2242	TEMPERATURE, HIGH (AMBIENT AND OPERATIONAL). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2242.
2244	TEMPERATURE, HIGH (AMBIENT AND OPERATIONAL). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-23417.
2246	INITIAL TEMPERATURE SHALL BE 2246 DEGREES CELSIUS.
2250	TEMPERATURE SHALL BE MAINTAINED FOR 2250 HOUR(S).
2252	TEMPERATURE SHALL BE RAISED TO 2252 DEGREES CELSIUS.
2256	TEMPERATURE SHALL BE MAINTAINED FOR 2256 HOUR(S).
2210	TEMPERATURE, LOW (AMBIENT AND OPERATIONAL). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT EXCEPT 2210.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NO EVIDENCE OF DAMAGE OR DEGRADATION.	2212
MAXIMUM BRUSH CONTACT RESISTANCE (OHMS)	2214
MAXIMUM LEAKAGE CURRENT (MILLIAMPERES)	2216
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2218
MAXIMUM FUNCTION ERROR (PERCENT)	2226
MAXIMUM ELECTRICAL ERROR (MINUTES)	2220
MAXIMUM TOTAL NULL VOLTAGE (MILLIVOLTS)	2222
MAXIMUM FUNDAMENTAL NULL VOLTAGE (MILLIVOLTS)	2224
MAXIMUM FRICTION TORQUE (SELECT ONE)	
(OUNCE-INCHES)	2230
(NEWTON METERS)	2960
MAXIMUM LINEARITY ERROR (PERCENT)	2232
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2192

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2212	TEMPERATURE, LOW (AMBIENT AND OPERATIONAL). THE RESOLVERS SHALL SHOW NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
2214	AFTER TEMPERATURE STABILIZATION, BRUSH CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2214 OHM(S).
2216	AFTER TEMPERATURE STABILIZATION, LEAKAGE CURRENT SHALL BE NOT GREATER THAN 2216 MILLIAMPERE(S).
2218	AFTER TEMPERATURE STABILIZATION, INSULATION RESISTANCE SHALL BE NOT LESS THAN 2218 MEGOHM(S).
2226	AFTER TEMPERATURE STABILIZATION, FUNCTION ERROR SHALL BE NOT GREATER THAN 2226 PERCENT.
2220	AFTER TEMPERATURE STABILIZATION, ELECTRICAL ERROR SHALL BE NOT GREATER THAN 2220 MINUTE(S).
2222	AFTER TEMPERATURE STABILIZATION, TOTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 2222 MILLIVOLT(S).
2224	AFTER TEMPERATURE STABILIZATION, FUNDAMENTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 2224 MILLIVOLT(S).
2230	AFTER TEMPERATURE STABILIZATION, FRICTION TORQUE SHALL BE NOT GREATER THAN 2230 OUNCE-INCH(S).
2960	AFTER TEMPERATURE STABILIZATION, FRICTION TORQUE SHALL BE NOT GREATER THAN 2960 NEWTON METER(S).
2232	AFTER TEMPERATURE STABILIZATION, LINEARITY ERROR SHALL BE NOT GREATER THAN 2232 PERCENT.
2192	TEMPERATURE, LOW (AMBIENT AND OPERATIONAL). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2192.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PER MIL-R-23417.	2194
INITIAL TEMPERATURE (DEGREES CELSIUS)	2196
TEMPERATURE DURATION (HOURS)	2200
INCREASED TEMPERATURE (DEGREES CELSIUS)	2202
TEMPERATURE DURATION (HOURS)	2206
TERMINAL STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1418
NO EVIDENCE OF PHYSICAL DAMAGE.	1433
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1410
PER MIL-STD-202, METHOD 211.	1375
*TEST CONDITIONS	
TEST CONDITION A, APPLIED FORCE (SELECT ONE)	
(POUNDS)	1411
(NEWTONS)	1419

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2194	TEMPERATURE, LOW (AMBIENT AND OPERATIONAL). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-23417.
2196	INITIAL TEST TEMPERATURE SHALL BE 2196 DEGREES CELSIUS.
2200	TEMPERATURE SHALL BE MAINTAINED FOR 2200 HOUR(S).
2202	TEMPERATURE SHALL BE RAISED TO 2202 DEGREES CELSIUS.
2206	TEMPERATURE SHALL BE MAINTAINED FOR 2206 HOUR(S).
1418	TERMINAL STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1418.
1433	TERMINAL STRENGTH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1410	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1410.
1375	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 211 OF MIL-STD-202.
1411	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1411 POUND(S).
1419	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1419 NEWTON(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST CONDITION B, BENDS (NUMBER)	1412
TEST CONDITION C, LOAD (SELECT ONE)	
(POUNDS)	1413
(KILOGRAMS)	1420
TEST CONDITION D.	1414
TEST CONDITON E, TORQUE (SELECT ONE)	
(POUND-INCHES)	1416
(NEWTON METERS)	1421
TRANSFORMATION RATIO (VARIATION AND EQUALITY)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1768
AS FOLLOWS:	2930
MAXIMUM VARIATION WITH INPUT (± PERCENT)	1769
MAXIMUM VARIATION OVER VOLTAGE RANGE	
*(PERCENT)	1770
*MINIMUM (VOLTS)	1771
*MAXIMUM (VOLTS)	1772

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1412	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION B. THERE SHALL BE 1412 BEND(S).
1413	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1413 POUND(S).
1420	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1420 KILOGRAM(S).
1414	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION D.
1416	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1416 POUND-INCH(S).
1421	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1421 NEWTON METER(S).
1768	TRANSFORMATION RATIO (VARIATION AND EQUALITY). REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1768.
2930	TRANSFORMATION RATIO (VARIATION AND EQUALITY). REQUIREMENT(S) SHALL BE AS FOLLOWS:
1769	VARIATION OF TRANSFORMATION RATIO WITH THE INPUT VOLTAGE SHALL BE NOT GREATER THAN PLUS OR MINUS 1769 PERCENT.
1770 1771 1772	VARIATION OF TRANSFORMATION RATIO SHALL BE NOT GREATER THAN 1770 PERCENT WITHIN THE VOLTAGE RANGE OF 1771 VOLT(S) TO 1772 VOLT(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM VARIATION OVER VOLTAGE RANGE	
*(PERCENT)	1773
*MINIMUM (VOLTS)	1774
*MAXIMUM (VOLTS)	1775
EQUALITY OUTPUT/INPUT MAXIMUM RATIO (PERCENT)	1777
EQUALITY ROTOR/COMPENSATOR MAXIMUM RATIO (PERCENT)	1778
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1758
PER MIL-R-23417.	1760
TEST VOLTAGE (VOLTS)	1761
VIBRATION, HIGH FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1455
NO EVIDENCE OF PHYSICAL DAMAGE.	1456
DURING TEST, MAXIMUM ANGULAR DEVIATION (SECONDS)	3240
AFTER TEST REQUIREMENTS	
MAXIMUM BRUSH CONTACT RESISTANCE (OHMS)	3022

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1773 1774 1775	VARIATION OF TRANSFORMATION RATIO SHALL BE NOT GREATER THAN 1773 PERCENT WITHIN THE VOLTAGE RANGE OF 1774 VOLT(S) TO 1775 VOLT(S).
1777	EQUALITY OF TRANSFORMATION RATIO (OUTPUT/INPUT) SHALL BE NOT GREATER THAN 1777 PERCENT.
1778	EQUALITY OF TRANSFORMATION RATIO (ROTOR/COMPENSATOR) SHALL BE NOT GREATER THAN 1778 PERCENT.
1758	TRANSFORMATION RATIO (VARIATION AND EQUALITY). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1758.
1760	TRANSFORMATION RATIO (VARIATION AND EQUALITY). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-23417.
1761	TEST VOLTAGE SHALL BE 1761 VOLT(S).
1455	VIBRATION, HIGH FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1455.
1456	VIBRATION, HIGH FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
3240	DURING TEST, ANGULAR DEVIATION SHALL BE NOT GREATER THAN 3240 SECOND(S).
3022	AFTER TEST, BRUSH CONTACT RESISTANCE SHALL BE NOT GREATER THAN 3022 OHM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM LEAKAGE CURRENT (MILLIAMPERES)	3023
MINIMUM INSULATION RESISTANCE (MEGOHMS)	3024
MAXIMUM FUNCTION ERROR (PERCENT)	3025
MAXIMUM ELECTRICAL ERROR (MINUTES)	3026
MAXIMUM TOTAL NULL VOLTAGE (MILLIVOLTS)	3027
MAXIMUM FUNDAMENTAL NULL VOLTAGE (MILLIVOLTS)	3028
MAXIMUM FRICTION TORQUE (SELECT ONE)	
(OUNCE-INCHES)	3029
(NEWTON METERS)	3242
MAXIMUM RADIAL PLAY (SELECT ONE)	
(INCHES)	3030
(MILLIMETERS)	3244
MAXIMUM END PLAY (SELECT ONE)	
(INCHES)	3031
(MILLIMETERS)	3246

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3023	AFTER TEST, DIELECTRIC WITHSTANDING VOLTAGE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 3023 MILLIAMPERE(S).
3024	AFTER TEST, INSULATION RESISTANCE SHALL BE NOT LESS THAN 3024 MEGOHM(S).
3025	AFTER TEST, FUNCTION ERROR SHALL BE NOT GREATER THAN 3025 PERCENT.
3026	AFTER TEST, ELECTRICAL ERROR SHALL BE NOT GREATER THAN 3026 MINUTE(S).
3027	AFTER TEST, TOTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 3027 MILLIVOLT(S).
3028	AFTER TEST, FUNDAMENTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 3028 MILLIVOLT(S).
3029	AFTER TEST, FRICTION TORQUE SHALL BE NOT GREATER THAN 3029 OUNCE-INCH(S).
3242	AFTER TEST, FRICTION TORQUE SHALL BE NOT GREATER THAN 3242 NEWTON METER(S).
3030	AFTER TEST, RADIAL PLAY SHALL BE NOT GREATER THAN 3030 INCH(S).
3244	AFTER TEST, RADIAL PLAY SHALL BE NOT GREATER THAN 3244 MILLIMETER(S).
3031	AFTER TEST, END PLAY SHALL BE NOT GREATER THAN 3031 INCH(S).
3246	AFTER TEST, END PLAY SHALL BE NOT GREATER THAN 3246 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM LINEARITY ERROR (PERCENT)	3032
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1446
PER MIL-STD-202, METHOD 204.	1447
*TEST CONDITION (LETTER)	1448
PERCENT RATED LOAD APPLIED (PERCENT)	6200
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4709
NORMAL MOUNTING METHOD.	4708
MOUNT PER DOCUMENT (DOC DES)	4707
METHOD OF DETERMINING MECHANICAL RESONANCE (SELECT ONE)	
VISUALLY BY MEANS OF A STROBOTAC.	1533
ELECTRICAL OUTPUT INDICATORS.	1534
VIBRATION, LOW FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1475
NO EVIDENCE OF PHYSICAL DAMAGE.	1476

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3032	AFTER TEST, LINEARITY ERROR SHALL BE NOT GREATER THAN 3032 PERCENT.
1446	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH BASE DOCUMENT, EXCEPT 1446.
1447	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 204 OF MIL-STD-202.
1448	TEST CONDITION LETTER 1448 SHALL APPLY.
6200	THE LOAD SHALL BE 6200 PERCENT OF THE RATED LOAD.
4709	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4708	MOUNTING SHALL BE BY THE NORMAL METHOD.
4707	MOUNTING SHALL BE IN ACCORDANCE WITH 4707.
1533	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE VISUALLY BY MEANS OF A STROBOTAC.
1534	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE BY ELECTRICAL OUTPUT INDICATORS.
1475	VIBRATION, LOW FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1475.
1476	VIBRATION, LOW FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DURING TEST, MAXIMUM ANGULAR DEVIATION (SECONDS)	3250
AFTER TEST REQUIREMENTS	
MAXIMUM BRUSH CONTACT RESISTANCE (OHMS)	3033
MAXIMUM LEAKAGE CURRENT (MILLIAMPERES)	3034
MINIMUM INSULATION RESISTANCE (MEGOHMS)	3035
MAXIMUM FUNCTION ERROR (PERCENT)	3036
MAXIMUM ELECTRICAL ERROR (MINUTES)	3037
MAXIMUM TOTAL NULL VOLTAGE (MILLIVOLTS)	3038
MAXIMUM FUNDAMENTAL NULL VOLTAGE (MILLIVOLTS)	3039
MAXIMUM FRICTION TORQUE (SELECT ONE)	
(OUNCE-INCHES)	3040
(NEWTON METERS)	3252
MAXIMUM RADIAL PLAY (SELECT ONE)	
(INCHES)	3041
(MILLIMETERS)	3254

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3250	DURING TEST, ANGULAR DEVIATION SHALL BE NOT GREATER THAN 3250 SECOND(S).
3033	AFTER TEST, BRUSH CONTACT RESISTANCE SHALL BE NOT GREATER THAN 3033 OHM(S).
3034	AFTER TEST, DIELECTRIC WITHSTANDING VOLTAGE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 3034 MILLIAMPERE(S).
3035	AFTER TEST, INSULATION RESISTANCE SHALL BE NOT LESS THAN 3035 MEGOHM(S).
3036	AFTER TEST, FUNCTION ERROR SHALL BE NOT GREATER THAN 3036 PERCENT.
3037	AFTER TEST, ELECTRICAL ERROR SHALL BE NOT GREATER THAN 3037 MINUTE(S).
3038	AFTER TEST, TOTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 3038 MILLIVOLT(S).
3039	AFTER TEST, FUNDAMENTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 3039 MILLIVOLT(S).
3040	AFTER TEST, FRICTION TORQUE SHALL BE NOT GREATER THAN 3040 OUNCE-INCH(S).
3252	AFTER TEST, FRICTION TORQUE SHALL BE NOT GREATER THAN 3252 NEWTON METER(S).
3041	AFTER TEST, RADIAL PLAY SHALL BE NOT GREATER THAN 3041 INCH(S).
3254	AFTER TEST, RADIAL PLAY SHALL BE NOT GREATER THAN 3254 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM END PLAY (SELECT ONE)	
(INCHES)	3042
(MILLIMETERS)	3256
MAXIMUM LINEARITY ERROR (PERCENT)	3043
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1466
PER MIL-STD-202, METHOD 201.	1467
DURATION OF VIBRATION PER AXIS (HOURS)	1470
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4731
NORMAL MOUNTING METHOD.	4730
MOUNT PER DOCUMENT (DOC DES)	4729
DIRECTION OF MOTION	
PARALLEL TO LONGITUDINAL AXIS.	1535
PERPENDICULAR TO LONGITUDINAL AXIS.	1536
ON THE CENTERLINE OF MOST SENSITIVE AXIS.	4979

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3042	AFTER TEST, END PLAY SHALL BE NOT GREATER THAN 3042 INCH(S).
3256	AFTER TEST, END PLAY SHALL BE NOT GREATER THAN 3256 MILLIMETER(S).
3043	AFTER TEST, LINEARITY ERROR SHALL BE NOT GREATER THAN 3043 PERCENT.
1466	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PEFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1466.
1467	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 201 OF MIL-STD-202.
1470	DURATION OF TEST SHALL BE 1470 HOUR(S) PER AXIS.
4731	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4730	MOUNTING SHALL BE BY THE NORMAL METHOD.
4729	MOUNTING SHALL BE IN ACCORDANCE WITH 4729.
1535	THE DIRECTION OF MOTION SHALL BE PARALLEL TO THE LONGITUDINAL AXIS.
1536	THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE LONGITUDINAL AXIS.
4979	THE DIRECTION OF MOTION SHALL BE ON THE CENTERLINE OF THE MOST SENSITIVE AXIS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.	4978
THREE MUTUALLY PERPENDICULAR DIRECTIONS.	1537
VIBRATION, RANDOM	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1435
NO EVIDENCE OF PHYSICAL DAMAGE.	1436
DURING TEST MAXIMUM ANGULAR DEVIATION (SECONDS)	3258
AFTER TEST REQUIREMENTS	
MAXIMUM BRUSH CONTACT RESISTANCE (OHMS)	3011
MAXIMUM LEAKAGE CURRENT (MILLIAMPERES)	3012
MINIMUM INSULATION RESISTANCE (MEGOHMS)	3013
MAXIMUM FRICTION ERROR (PERCENT)	3014
MAXIMUM ELECTRICAL ERROR (MINUTES)	3015

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4978	THE DIRECTION OF MOTION SHALL BE 90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.
1537	THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUALLY PERPENDICULAR DIRECTIONS.
1435	VIBRATION, RANDOM. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1435.
1436	VIBRATION, RANDOM. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
3258	DURING TEST, ANGULAR DEVIATION SHALL BE NOT GREATER THAN 3258 SECOND(S).
3011	AFTER TEST, BRUSH CONTACT RESISTANCE SHALL BE NOT GREATER THAN 3011 OHM(S).
3012	AFTER TEST, DIELECTRIC WITHSTANDING VOLTAGE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 3012 MILLIAMPERE(S).
3013	AFTER TEST, INSULATION RESISTANCE SHALL BE NOT LESS THAN 3013 MEGOHM(S).
3014	AFTER TEST, FUNCTION ERROR SHALL BE NOT GREATER THAN 3014 PERCENT.
3015	AFTER TEST, ELECTRICAL ERROR SHALL BE NOT GREATER THAN 3015 MINUTE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM TOTAL NULL VOLTAGE (MILLIVOLTS)	3016
MAXIMUM FUNDAMENTAL NULL VOLTAGE (MILLIVOLTS)	3017
MAXIMUM FRICTION TORQUE (SELECT ONE)	
(OUNCE-INCHES)	3018
(NEWTON METERS)	3260
MAXIMUM RADIAL PLAY (SELECT ONE)	
(INCHES)	3019
(MILLIMETERS)	3262
MAXIMUM END PLAY (SELECT ONE)	
(INCHES)	3020
(MILLIMETERS)	3264
MAXIMUM LINEARITY ERROR (PERCENT)	3021
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1426
PER MIL-STD-202, METHOD 214.	1427

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3016	AFTER TEST, TOTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 3016 MILLIVOLT(S).
3017	AFTER TEST, FUNDAMENTAL NULL VOLTAGE SHALL BE NOT GREATER THAN 3017 MILLIVOLT(S).
3018	AFTER TEST, FRICTION TORQUE SHALL BE NOT GREATER THAN 3018 OUNCE-INCH(S).
3260	AFTER TEST, FRICTION TORQUE SHALL BE NOT GREATER THAN 3260 NEWTON METER(S).
3019	AFTER TEST, RADIAL PLAY SHALL BE NOT GREATER THAN 3019 INCH(S).
3262	AFTER TEST, RADIAL PLAY SHALL BE NOT GREATER THAN 3262 MILLIMETER(S).
3020	AFTER TEST, END PLAY SHALL BE NOT GREATER THAN 3020 INCH(S).
3264	AFTER TEST, END PLAY SHALL BE NOT GREATER THAN 3264 MILLIMETER(S).
3021	AFTER TEST, LINEARITY ERROR SHALL BE NOT GREATER THAN 3021 PERCENT.
1426	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1426.
1427	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 214 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*TEST CONDITION (ROMAN NUMERAL AND LETTER)	1428
*DURATION OF APPLICATION (SELECT ONE)	
(MINUTES)	1438
(HOURS)	1431
MONITORING INSTRUMENTATION OF EXCITATION (SELECT ONE)	
ANY SUITABLE SYSTEM.	1452
CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.	1453
CALIBRATED OSCILLOSCOPE.	1459
NUMBER OF VIBRATION MONITORING TEST POINTS (QUANTITY)	1430
LOCATION OF MONITORING POINTS (SELECT ONE)	
ANY SUITABLE LOCATION.	1439
AS CLOSE AS PRACTICAL TO TEST SPECIMEN.	1462
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4977

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1428	TEST CONDITION NUMBER AND LETTER 1428 SHALL APPLY.
1438	THE DURATION OF THE TEST SHALL BE 1438 MINUTE(S).
1431	THE DURATION OF THE TEST SHALL BE 1431 HOUR(S).
1452	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE ANY SUITABLE INSTRUMENTATION SYSTEM.
1453	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.
1459	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED OSCILLOSCOPE.
1430	THERE SHALL BE 1430 VIBRATION MONITORING POINT(S).
1439	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE ANY SUITABLE LOCATION.
1462	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE AS CLOSE AS PRACTICAL TO THE TEST SPECIMEN(S).
4977	MOUNTING SHALL BE BY ANY SUITABLE METHOD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NORMAL MOUNTING METHOD.	4976
MOUNT PER DOCUMENT (DOC DES)	4975
VOLTAGE GRADIENT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1864
MAXIMUM GRADIENT (VOLTS/DEGREE)	1866
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1856
PER MIL-R-50781.	1858
ZERO SHIFT OF NULL SPACING AT 45 DEGREES	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1838
AS FOLLOWS:	2940
MAXIMUM SHIFT WITH VOLTAGE (± SECONDS)	1839
MAXIMUM SHIFT WITH FREQUENCY (± SECONDS)	1840

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4976	MOUNTING SHALL BE BY THE NORMAL METHOD.
4975	MOUNTING SHALL BE IN ACCORDANCE WITH 4975.
1864	VOLTAGE GRADIENT. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1864.
1866	VOLTAGE GRADIENT. VOLTAGE GRADIENT SHALL BE NOT GREATER THAN 1866 VOLT(S)/DEGREE.
1856	VOLTAGE GRADIENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1856.
1858	VOLTAGE GRADIENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-50781.
1838	ZERO SHIFT OF NULL SPACING AT 45 DEGREES. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1838.
2940	ZERO SHIFT OF NULL SPACING AT 45 DEGREES. THE ZERO SHIFT OF NULL SPACING AT 45 DEGREES SHALL BE AS FOLLOWS.
1839	ZERO SHIFT WITH VOLTAGE SHALL BE NOT GREATER THAN PLUS OR MINUS 1839 SECOND(S).
1840	ZERO SHIFT WITH FREQUENCY SHALL BE NOT GREATER THAN PLUS OR MINUS 1840 SECOND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1835
PER MIL-R-21530.	1836
MOUNTING HARDWARE (SEE TABLE VIII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VIII IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A_____	7001
B_____	7002
C_____	7003
D_____	7004
E_____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-130.	7629

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE | STANDARD PARAGRAPH

1835 ZERO SHIFT OF NULL SPACING AT 45 DEGREES. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1835.

1836 ZERO SHIFT OF NULL SPACING AT 45 DEGREES. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-21530.

MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.

6870 WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.

ADDITIONAL REQUIREMENTS.

7001 (A) 7001.

7002 (B) 7002.

7003 (C) 7003.

7004 (D) 7004.

7005 (E) 7005.

6372 PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.

7629 PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MIL-STD-1285.	7630
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995

APPLICABLE DOCUMENTS (SEE DOD-STD-35)

QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)

PACKAGING (SEE DOD-STD-35)

NOTES (SEE DOD-STD-35)

NOMENCLATURE (SEE DOD-STD-35)

SUPERSEDED DOCUMENT (SEE DOD-STD-35)

PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

Custodians:
Army-MI

User activity:
Army-MU

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

Preparing activity:
Army-MI


(Project EDS-A369)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX A


ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

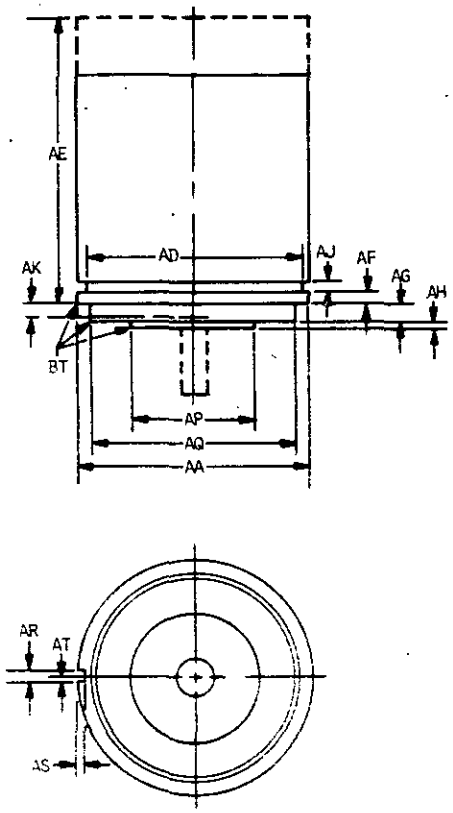


083-01-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

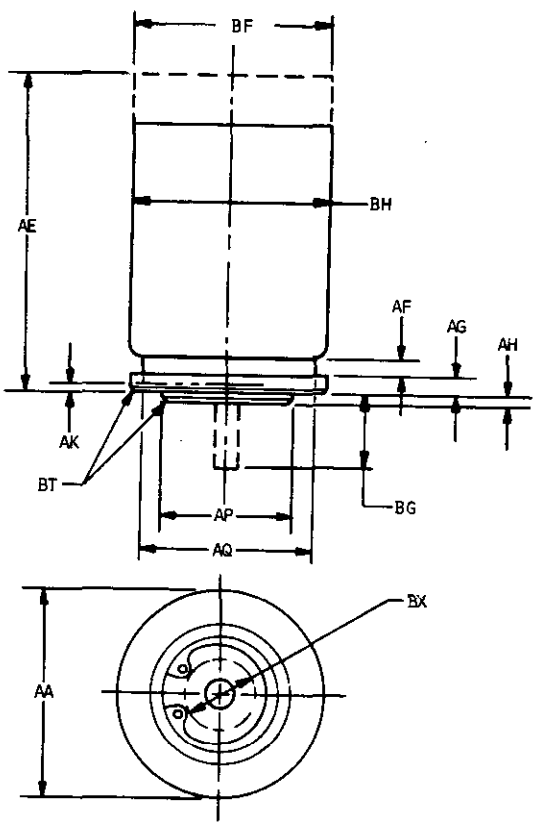


083-01-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

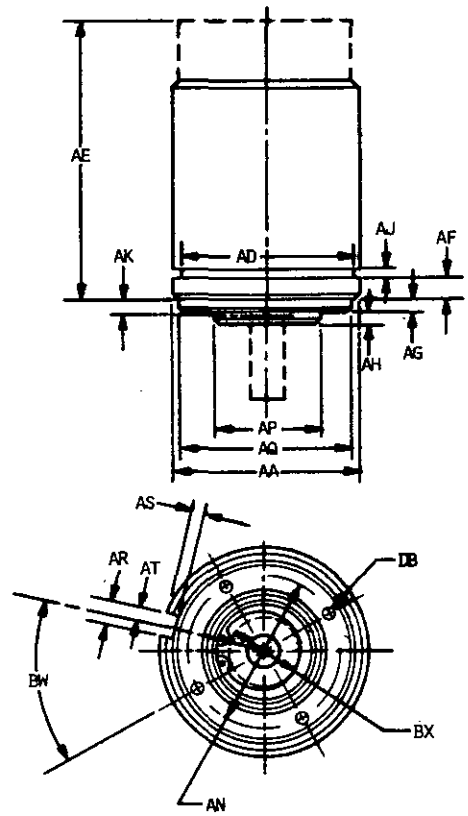


083-01-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

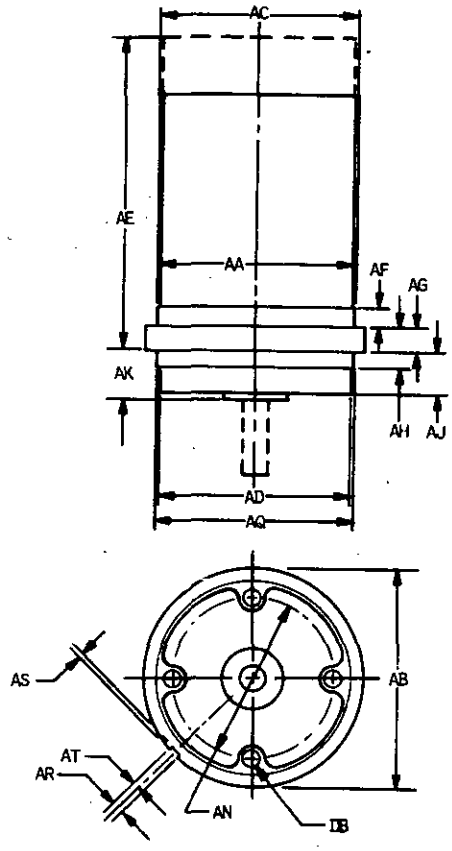


083-01-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

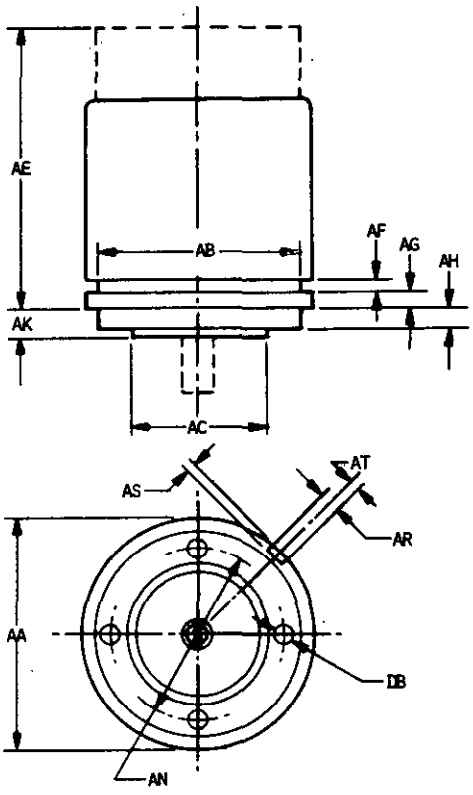


083-01-5

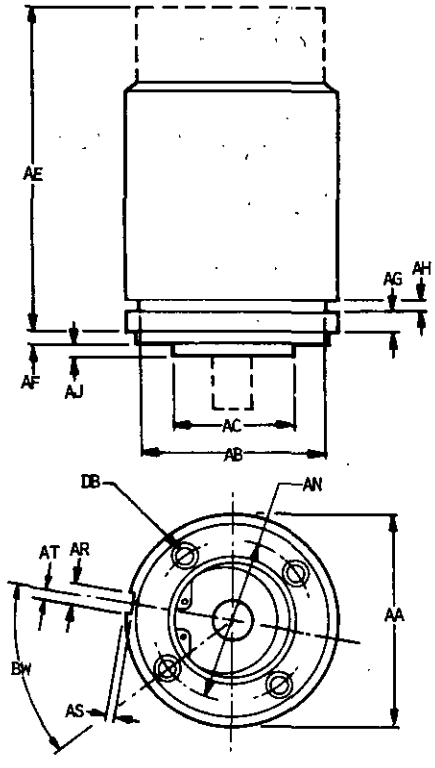


083-01-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

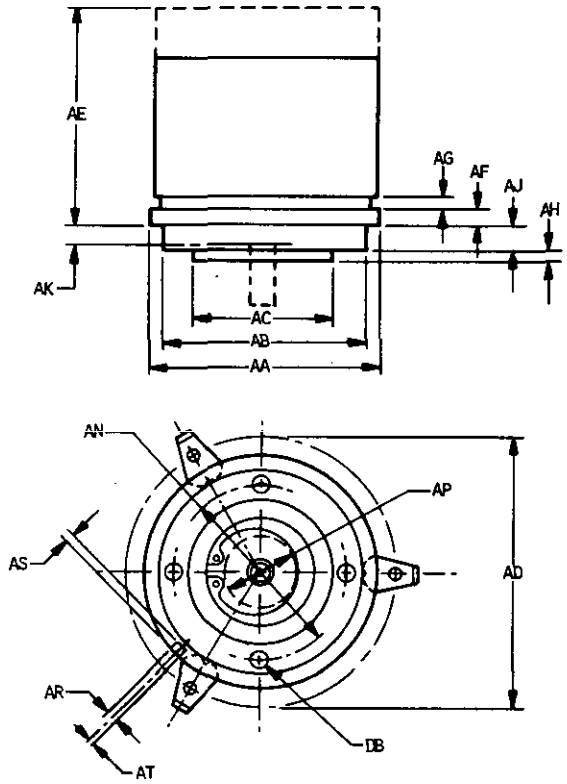


083-01-7

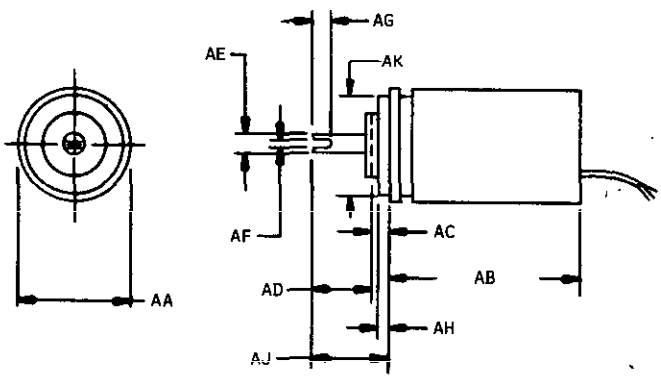


083-01-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

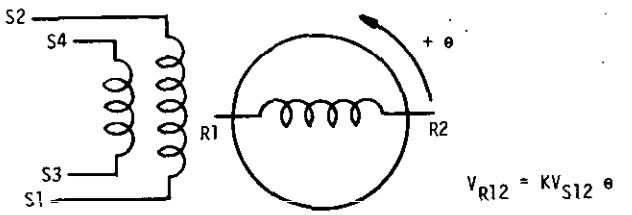

VIEW FROM SHAFT AT ELECTRICAL ZERO


Ø83-Ø4-1

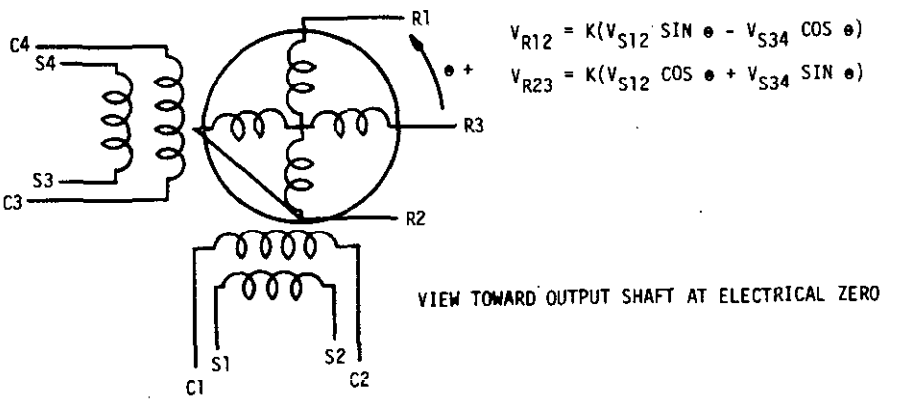


VIEW TOWARD OUTPUT SHAFT AT ELECTRICAL ZERO

Ø83-Ø4-2

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.



083-04-3

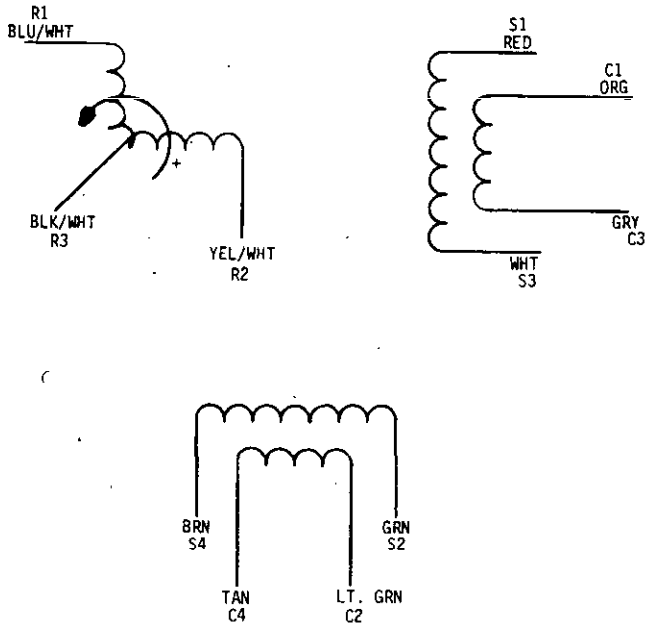

083-04-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	10	1418	112	1498	70	1594	18
0102	10	1419	112	1500	98	1596	20
0103	10	1420	114	1502	98	1598	20
0104	10	1421	114	1504	98	1600	20
0105	10	1426	128	1508	96	1604	20
0107	12	1427	128	1509	96	1606	20
0108	12	1428	130	1511	70	1620	20
0700	10	1429	76	1520	70	1621	20
0800	10	1430	130	1522	70	1622	20
1004	10	1431	130	1523	70	1623	20
1005	10	1432	76	1524	70	1624	20
1006	10	1433	112	1533	120	1625	20
1008	10	1435	126	1534	120	1630	20
1009	14	1436	126	1535	124	1631	20
1371	68	1438	130	1536	124	1632	20
1372	70	1439	130	1537	126	1633	20
1373	70	1446	120	1557	30	1637	22
1375	112	1447	120	1558	30	1638	22
1376	70	1448	120	1562	16	1639	22
1377	70	1449	78	1563	16	1641	36
1378	70	1452	130	1564	16	1642	36
1380	68	1453	130	1567	16	1644	36
1381	70	1455	116	1568	16	1645	36
1384	68	1456	116	1571	16	1646	36
1386	68	1459	130	1572	16	1647	36
1387	68	1462	130	1573	16	1652	86
1391	78	1466	124	1574	18	1654	86
1394	74	1467	124	1575	18	1655	86
1396	74	1468	96	1576	18	1660	86
1397	78	1470	124	1580	18	1662	86
1400	74	1475	120	1581	18	1672	48
1404	76	1476	120	1582	18	1674	48
1406	76	1477	64	1583	18	1676	50
1407	68	1478	96	1584	18	1677	50
1410	112	1482	94	1585	18	1680	48
1411	112	1486	94	1587	18	1682	48
1412	114	1488	96	1588	18	1692	58
1413	114	1494	92	1589	18	1694	58
1414	114	1495	92	1590	18	1696	58
1416	114	1497	70	1592	18	1700	60

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1702	60	1797	46	1972	104	2099	100
1706	60	1798	46	1974	104	2108	38
1712	56	1799	46	1986	104	2110	38
1714	58	1802	44	1988	104	2118	38
1715	58	1804	44	1990	104	2120	38
1716	58	1812	80	2002	90	2122	38
1717	58	1814	80	2004	90	2123	38
1718	58	1815	80	2010	88	2128	72
1719	58	1816	80	2012	88	2129	72
1721	84	1822	80	2014	88	2131	72
1722	84	1824	80	2015	90	2132	72
1724	82	1825	80	2016	90	2192	110
1726	82	1827	38	2017	90	2194	112
1727	84	1828	38	2018	90	2196	112
1736	84	1830	36	2026	88	2200	112
1738	84	1831	36	2028	88	2202	112
1746	84	1833	38	2038	86	2206	112
1748	84	1835	134	2040	88	2210	108
1749	84	1836	134	2042	88	2212	110
1758	116	1838	132	2043	88	2214	110
1760	116	1839	132	2044	88	2216	110
1761	116	1840	132	2045	88	2218	110
1768	114	1842	44	2046	88	2220	110
1769	114	1843	44	2056	102	2222	110
1770	114	1848	44	2058	102	2224	110
1771	114	1850	44	2066	102	2226	110
1772	114	1852	44	2068	102	2230	110
1773	116	1854	44	2070	102	2232	110
1774	116	1856	132	2071	102	2242	108
1775	116	1858	132	2072	102	2244	108
1777	116	1864	132	2073	102	2246	108
1778	116	1866	132	2074	102	2250	108
1780	82	1870	74	2082	100	2252	108
1781	82	1871	74	2084	100	2256	108
1784	82	1876	74	2092	100	2266	106
1786	82	1878	74	2094	100	2268	106
1788	82	1882	62	2095	100	2270	106
1789	82	1884	62	2096	100	2272	106
1794	82	1888	62	2097	100	2274	108
1796	46	1892	62	2098	100	2276	108

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2278	106	2483	46	2824	58	3016	128
2282	108	2625	56	2826	58	3017	128
2284	106	2626	56	2828	58	3018	128
2286	106	2628	56	2830	58	3019	128
2287	108	2632	56	2832	58	3020	128
2302	34	2642	56	2850	72	3021	128
2304	34	2644	56	2860	80	3022	116
2306	34	2655	52	2870	82	3023	118
2310	34	2656	52	2880	86	3024	118
2312	34	2721	50	2882	86	3025	118
2322	34	2722	50	2890	88	3026	118
2324	34	2733	60	2896	88	3027	118
2326	34	2734	60	2900	100	3028	118
2328	34	2736	60	2910	102	3029	118
2352	32	2737	60	2920	104	3030	118
2354	32	2761	74	2930	114	3031	118
2356	32	2762	74	2940	132	3032	120
2360	32	2765	72	2950	108	3033	122
2362	34	2766	72	2960	110	3034	122
2372	32	2767	72	2970	28	3035	122
2374	32	2768	72	2972	28	3036	122
2376	32	2769	72	2974	28	3037	122
2377	32	2770	22	2980	64	3038	122
2380	32	2772	22	2982	66	3039	122
2401	106	2774	22	2984	66	3040	122
2402	106	2776	34	2986	66	3041	122
2412	106	2778	34	3000	76	3042	124
2421	104	2780	36	3003	76	3043	124
2422	104	2782	36	3004	76	3055	92
2463	48	2784	38	3005	76	3056	92
2464	48	2786	44	3006	76	3057	92
2469	48	2788	46	3007	76	3058	92
2471	48	2800	48	3008	78	3059	92
2472	48	2802	50	3009	78	3060	92
2474	46	2810	52	3010	78	3061	94
2475	46	2812	52	3011	126	3062	94
2476	46	2814	52	3012	126	3063	94
2477	46	2819	58	3013	126	3064	94
2481	46	2820	58	3014	126	3065	94
2482	46	2822	58	3015	126	3066	96

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3067	96	3120	28	4418	55	4458	55
3068	96	3200	76	4419	55	4459	55
3069	96	3202	78	4420	55	4460	55
3070	96	3204	78	4421	55	4461	55
3071	96	3210	94	4422	55	4462	55
3072	98	3212	94	4423	55	4463	55
3073	98	3214	94	4424	55	4464	55
3074	98	3220	98	4425	55	4465	55
3075	98	3222	98	4426	55	4466	55
3076	98	3224	98	4427	55	4467	55
3088	64	3240	116	4428	55	4468	55
3091	64	3242	118	4429	55	4469	55
3092	64	3244	118	4430	55	4470	55
3093	64	3246	118	4431	55	4471	55
3094	66	3250	122	4432	55	4472	55
3095	66	3252	122	4433	55	4473	55
3096	66	3254	122	4434	55	4474	55
3097	66	3256	124	4435	55	4475	55
3098	66	3258	126	4436	55	4476	55
3099	50	3260	128	4437	55	4477	55
3100	50	3262	128	4438	55	4478	55
3101	50	3264	128	4439	55	4479	55
3102	50	4400	55	4440	55	4480	55
3103	50	4401	55	4441	55	4481	55
3104	50	4402	55	4442	55	4482	55
3105	50	4403	55	4443	55	4483	55
3106	52	4404	55	4444	55	4484	55
3107	52	4405	55	4445	55	4485	55
3108	52	4406	55	4446	55	4486	55
3109	52	4407	55	4447	55	4487	55
3110	26	4408	55	4448	55	4488	55
3111	26	4409	55	4449	55	4489	55
3112	28	4410	55	4450	55	4490	55
3113	28	4411	55	4451	55	4684	100
3114	28	4412	55	4452	55	4685	100
3115	28	4413	55	4453	55	4686	100
3116	28	4414	55	4454	55	4707	120
3117	28	4415	55	4455	55	4708	120
3118	28	4416	55	4456	55	4709	120
3119	28	4417	55	4457	55	4717	42

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4729	124	4868	30	6792	24		
4730	124	4869	42	6793	24		
4731	124	4870	42	6794	24		
4754	62	4874	40	6795	24		
4755	62	4875	40	6798	24		
4756	62	4878	90	6799	24		
4760	60	4890	66	6803	24		
4761	60	4892	30	6870	134		
4762	62	4893	30	6873	10		
4765	92	4897	42	6874	12		
4766	92	4950	14	6941	12		
4770	90	4975	132	6942	12		
4771	90	4976	132	6991	136		
4772	90	4977	130	6992	136		
4773	92	4978	126	6993	136		
4782	90	4979	124	6994	136		
4788	66	4983	78	6995	136		
4795	64	4984	78	7001	134		
4798	62	4985	78	7002	134		
4799	64	4986	78	7003	134		
4803	64	5000	42	7004	134		
4805	64	6200	120	7005	134		
4813	64	6206	68	7021	26		
4815	64	6207	68	7022	26		
4842	40	6226	30	7023	26		
4844	42	6233	30	7024	26		
4845	42	6239	30	7572	14		
4846	42	6250	30	7577	14		
4848	40	6251	30	7580	16		
4850	42	6263	32	7629	134		
4853	66	6264	32	7630	136		
4854	40	6265	32				
4855	40	6267	42				
4856	40	6272	26				
4861	40	6273	26				
4862	40	6359	68				
4863	30	6369	10				
4864	30	6372	134				
4865	30	6790	22				
4867	42	6791	22				

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Acceleration	26
Additional Part Marking	136
Additional Requirements	134
Altitude	22
Altitude (High Temperature)	32
Altitude (Low Temperature)	34
Aperture Cards Required	12
Applicable Documents	136
Base Document	10
Brush Contact Resistance	36
City, State, Zip	10
Company Name/Command	10
Compensating Windings	36
Compensating Rotor Open Circuit Impedance	38
Configuration	14
Contract Number/Office Symbol	10
Control, Source	10
Control, Specification	12
Design and Construction	16
Dielectric Withstanding Voltage At Sea Level	40
Effective Electrical Travel	46
Electrical Error	44
Electromagnetic Interference (Radio Interference)	46
End Play	48
Endurance	50
Explosion Proof	56
Finishes	16
Format	10
Friction Torque	56
Function Error	60
Fungus	60
Government Design Activity FSCM	10
Harmonic Distortion	62
Humidity	62

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Illustrations	14
Insulation Resistance	68
Interaxis Error	72
Internal Capacities	72
Linearity Error	74
Materials	14
Metals	16
Moisture Resistance	74
Mounting Hardware	134
Nomenclature	136
Notes	136
Null Voltage	80
Packaging	136
Part Marking	134
Part Number	12
Part Number Cross-Reference	136
Phone Number	10
Performance Characteristics	24
Phase Shift Variation	82
Primary Current	82
Primary Power (Energizing Power)	84
Quality Assurance Provisions	136
Radial Play	86
Requester's FSCM	10
Requester's Name	10
Revision of AEDPS Document (Number)	12
Rotor Open Circuit Impedance	86
Rotor Short Circuit Impedance	88

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Salt Spray	90
Scope	12
Shock, High Impact	92
Shock, Specified Pulse	96
Source Table	12
Stator Open Circuit Impedance	100
Stator Short Circuit Impedance	102
Shift or Resolver Zero	104
Street/Building	10
Superseded Document	136
System Application	10
Tabulated Characteristics	14
Temperature	24
Temperature High (Ambient and Operational)	106
Temperature Low (Ambient and Operational)	108
Temperature Rise	104
Terminal Strength	112
Transformation Ratio (Variation and Equality)	114
Units of Measure	12
Vibration, High Frequency	116
Vibration, Low Frequency	120
Vibration, Random	126
Voltage Gradient	132
Weight/Mass	26
Workmanship	134
Zero Shift of Null Spacing at 45 Degrees	132



☆U.S. GOVERNMENT PRINTING OFFICE: 1987-704-036/74930

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-45A(MI), dated 31 Aug 1987 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-45A(MI), dated 31 Aug 1987 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-45A(MI), dated 31 Aug 1987 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.