DOD-STD-35-4C(MI)

25 AUGUST 1978
SUPERSEDING
MIL-STD-35-4B(MI)
21 APRIL 1975

MILITARY STANDARD

CAPACITORS, FIXED

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM



FSC EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Capacitors, Fixed
Automated Engineering
Document Preparation System

DOD-STD-35-4C(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-4C(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for fixed capacitors.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	9
	2.1	Issues of documents	9
	2.2	Other publications	9
	3.	DEFINITIONS	11
	4.	GENERAL REQUIREMENTS	13
	4.1	Introduction	13
	4.2	Specification Requirement Sheet (SRS)	13
	4.3	Configuration	13
	4.3.1	Dimensions	13
	4.3.2	Illustrations	13
	4.4	Units of measure	13
	5.	DETAILED REQUIREMENTS	15
	5.1	Introduction	15
	5.2	MSE Formats	15
	5.3	Referenced documents	15
	5.4	Tabulation	15
	5.5	Keyword Code Index (KCI) and Standard Paragraphs	17
	5.5.1	Interrelationship of Codes	17
	5.5.2	Automatic MSE Data	17
	5.5.3	DOD-STD-35 Tables	17

TABLES

Table	I.	Title Index	2
	II.	Tabulation candidates	16
	III.	Electrical Characteristic	187

APPENDICES

Appendix	A.	Tables	185
	B.	Illustrations	191
	C.	Characteristic Code Index	257
		Index	269

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:23Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for fixed capacitors.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KC I)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable. for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
CAPACITOR, CHIP, MULTIPLE LAYER, FIXED, UNENCAPSULATED CERAMIC DIELECTRIC	003068	MIL-C-55681	ESTABLISHED RELIABILITY(ER)
CAPACITOR, FIXED, CERAMIC DIELECTRIC	003001	MIL-C-39014 MIL-C-11015	ER NON ER
CAPACITORS FIXED, CERAMIC DIELECTRIC, CHIP	003071	MIL-C-55681	ER
CAPACITOR, FIXED, CERAMIC DIELECTRIC, FEEDTHROUGH	003007	MIL-C-20 MIL-C-11015 MIL-C-11014 MIL-C-83439	NON ER NON ER ER NON ER
CAPACITOR, FIXED, CERAMIC DIELECTRIC, HIGH VOLTAGE	003072	MIL-C-20 MIL-C-11015 MIL-C-39014	NON ER NON ER ER
CAPACITOR, FIXED, CERAMIC DIELECTRIC, STANDOFF	003008	MIL-C-11015 MIL-C-39014	NON ER ER
CAPACITOR, FIXED, CERAMIC DIELECTRIC, TEMPERATURE COMPENSATING (INSULATED)	003006	MIL-C-20	ER AND NON ER
CAPACITOR, FIXED, CERAMIC DIELECTRIC, TEMPERATURE COMPENSATING (UNINSULATED)	003005	MIL-C-20	ER AND NON ER
CAPACITOR, FIXED, ELECTROLYTIC, ALUMINUM OXIDE, NONPOLARIZED	003010	MIL-C-39018	ER AND NON ER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
CAPACITOR, FIXED, ELECTRO-LYTIC, ALUMINUM OXIDE, POLARIZED	003009	MIL-C-39018	ER AND NON ER
CAPACITOR, FIXED, ELECTRO-LYTIC, DC, ALUMINUM DRY ELECTROLYTE, POLARIZED	003011	MIL-C-62	NON ER
CAPACITOR, FIXED, ELECTRO-LYTIC, NONSOLID ELECTRO-LYTE, TANTALUM	003025	MIL-C-39006	ER
CAPACITOR, FIXED, ELECTRO-LYTIC, NONSOLID ELECTRO-LYTE, TANTALUM CATHODE	003081	MIL-C-83500	NONHERMETICALLY SEALED IN METAL CASE
CAPACI TOR, FIXED, ELECTRO-LYTIC, NONSOLID ELECTRO-LYTE , TANTALUM, NONPOLAR-IZED, ETCHED FOIL	003017	MIL-C-39006	ER
CAPACI TOR, FIXED, ELECTRO-LYTIC, NONSOLID ELECTRO-LYTE, TANTALUM, NONPOLAR-IZED, PLAIN FOIL	003015	MIL-C-39006	ER
CAPACI TOR, FIXED, ELECTRO-LYTIC, NONSOLID ELECTRO-LYTE, TANTALUM, POLARIZED, ETCHED FOIL	003016	MIL-C-39006	ER
CAPACITOR, FIXED, ELECTRO-LYTIC, NONSOLID ELECTRO-LYTE, TANTALUM, POLARIZED, PLAIN FOIL	003034	MIL-C-39006	ER
CAPACITOR, FIXED, ELECTRO-LYTIC, NONSOLID ELECTRO-LYTE, TANTALUM, POLARIZED, SINTERED SLUG	003013	MIL-C-39006	ER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
CAPACITOR, FIXED, ELECTROLYTIC, TANTALUM	003021	MIL-C-39003	ER, SOLID ELECTROLYTE
		MIL-C-39006	ER, NONSOLID ELECTROLYTE,
		MIL-C-49137	NONHERMETIC SEAL
CAPACITOR, FIXED, ELECTROLYTIC, TANTALUM, SOLID ELECTROLYTE	003024	MIL-C-39003	ER
		MIL-C-49137	NONHERMETIC SEAL
CAPACITOR, FIXED, ELECTROLYTIC, TANTALUM, SOLID ELECTROLYTE, CHIP	003073	MIL-C-55365	ER
CAPACITOR, FIXED, FEED-THROUGH, METALLIZED PLASTIC	003079	MIL-C-83439	NON ER
CAPACITOR, FIXED, FEED-THROUGH, TANTALUM, SOLID ELECTROLYTE	003078	MIL-C-83439	NON ER
CAPACITOR, FIXED, GLASS DIELECTRIC	003027	MIL-C-23269	ER
CAPACITOR, FIXED, METALLIZED	003074	MIL-C-39022	ER, HERMETIC SEAL
		MIL-C-555144	ER, NONMETALLIC CASE
		MIL-C-8342L	ER, HERMETIC SEAL
CAPACITOR, FIXED, METALLIZED PAPER, (HERMETICALLY SEALED IN METAL CASE)	003028	MIL-C-39022	ER
		MIL-C-83421	ER
CAPACITOR, FIXED, METALLIZED PAPER, PLASTIC FILM DIELECTRIC (HERMETICALLY SEALED IN METAL CASE)	003075	MIL-C-39022	ER
		MIL-C-83421	ER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	COVERAGE
CAPACITOR, FIXED, METALLIZED PLASTIC DIELECTRIC, (HERMETICALLY SEALED IN METAL CASE)	003076	MIL-C-39022 MIL-C-83421	ER ER
CAPACITOR, FIXED, METALLIZED PLASTIC, NONMETAL CASE	003034	MIL-C-55514	ER
CAPACITOR, FIXED, MICA DIELECTRIC	003039	MIL-C-5 MIL-C-39001	NON ER ER
CAPACITOR, FIXED, MICA DIELECTRIC, BUTTON STYLE, FEEDTHROUGH	003040	MIL-C-10950	BUTTON STYLES
CAPACITOR, FIXED, MICA DIELECTRIC, BUTTON STYLE, FEEDTHROUGH, (HERMETICALLY SEALED)	003042	MIL-C-10950	BUTTON STYLES
CAPACITOR, FIXED, MICA DIELECTRIC, BUTTON STYLE, STANDOFF	003041	MIL-C-10950	BUTTON STYLES
CAPACITOR, FIXED, MICA DIELECTRIC, BUTTON STYLE, STANDOFF, (HERMETICALLY SEALED)	003043	MIL-C-10950	BUTTON STYLES
CAPACITOR, FIXED, MULTIELEMENT	003077	MIL-C-55365 MIL-C-55681	ER ER
CAPACITOR, FIXED, PAPER DIELECTRIC, (HERMETICALLY SEALED IN METAL CASE)	003044	MIL-C-19978	ER AND NON ER
CAPACITOR, FIXED, PAPER-PLASTIC DIELECTRIC, (HERMETICALLY SEALED IN CERAMIC CASE)	003048	MIL-C-19978	ER AND NON ER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
CAPACITOR, FIXED, PAPER-PLASTIC DIELECTRIC, (HERMETICALLY SEALED IN GLASS CASE)	003047	MIL-C-19978	ER AND NON ER
CAPACITOR, FIXED, PAPER-PLASTIC DIELECTRIC, (HERMETICALLY SEALED IN METAL CASE)	003049	MIL-C-19978	ER AND NON ER
CAPACITOR, FIXED, PLASTIC DIELECTRIC, (HERMETICALLY SEALED IN CERAMIC CASE)	003056	MIL-C-19978	ER AND NON ER
CAPACITOR, FIXED, PLASTIC DIELECTRIC, (HERMETICALLY SEALED IN GLASS CASE)	003057	MIL-C-19978	ER AND NON ER
CAPACITOR, FIXED, PLASTIC DIELECTRIC, (HERMETICALLY SEALED IN METAL CASE)	003055	MIL-C-19978	ER AND NON ER
CAPACITOR, FIXED, PLASTIC DIELECTRIC, NONMETALLIC CASE	003052	MIL-C-555L4	ER
CAPACITOR, FIXED, RADIO INTERFERENCE REDUCTION, AC FEEDTHROUGH (HERMETICALLY SEALED IN METAL CASE)	003060	MIL-C-11693	ER AND NON ER
CAPACITOR, FIXED, RADIO INTERFERENCE REDUCTION, DC FEEDTHROUGH (HERMETICALLY SEALED IN METAL CASE)	003061	MIL-C-11693	ER AND NON ER
CAPACITOR, FIXED, RADIO INTERFERENCE REDUCTIONS PAPER DIELECTRIC, AC BYPASS, (HERMETICALLY SEALED IN METAL CASE)	003064	MIL-C-112889	NON ER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX, (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	COVERAGE
CAPACITOR, FIXED, RADIO INTERFERENCE REDUCTION, PAPER DIELECTRIC, DC BYPASS, (HERMETICALLY SEALED IN METAL CASE)	003065	MIL-C-12889	NON ER
CAPACITOR, FIXED, SUPER METALLIZED PLASTIC FILM DIELECTRIC, (HERMETICALLY SEALED IN METAL CASE)	003070	MIL-C-83421	ER
CAPACITOR, FIXED, VACUUM DIELECTRIC	003080	MIL-C-23183	HIGH VOLTAGE APPLICATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-I-17214	Indicator, Permeability; Low-Mu (Go-No-Go)

STANDARDS

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-220	Method of Insertion Loss Measurement
MIL-STD-810	Environmental Test Methods for Aerospace and Ground Equipment
MIL-STD-1285	Marking of Electrical and Electronic Parts

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTMD92	Method of Test for Flash and Fire Points by Cleveland Open Cup
ASTME380	Metric Practice Guide

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

ASTMD1868	Standard Method for Detection and Measurement of Corona Pulses in Evaluation of Insulation

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, Pa. 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Capacitors, Fixed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for Capacitors, Fixed, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Capacitors, Fixed.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Capacitors, Fixed.

4.3.2 Illustrations. Illustrations applicable to Capacitors, Fixed are contained in Appendix B to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table 11 provides codes for column headings which may be used for fixed capacitor characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE II. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING		COLUMN HEADING
1386	MIN INSUL RES MEGOHM	1562	CAP, MICROFARAD	1563	CAP, PICOFARAD
1564	CAP TOL, PLUS PCT	1565	CAP TOL, MINUS PCT	1582	MAX RATED VOLTAGE, VOLTS
1587	MAXIMUM DC LEAKAGE MICROAMPS	1590	MAX DISS FACTOR, PERCENT	1596	MAXIMUM PWR FACTOR
1608	MAX SURGE VOLTAGE, VOLTS	1612	TEMP COEF, PPM/DEG	1624	MAXIMUM IMPEDANCE, OHMS
1658	MINIMUM QUALITY FACTOR	3111	FREQUENCY RATING, HERTZ	3119	MAX CUR RATINGt AMPERES
3127	MAXIMUM ESR, OHMS	3139	TEMP COEF TOLERANCE PPM/DEG	7021	MAXIMUM WEIGHT, GRAMS
7022	MAXIMUM WEIGHT, OUNCES	7023	MAXIMUM WEIGHTS POUNDS		

Source: https://assist.dla.mil -- Downloaded: 2026t0-26T07:23Z
Check the source to verify that this is the current version before use.

5.5 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix C, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.5.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.5.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.5.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	O103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT.	0700
ONE SECTION DOCUMENT.	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN-
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6874 THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).

0107

0108 0108.

SCOPE.

SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.

PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.

PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLEo REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

6941 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES.

6942 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION	
STYLE (DESIGNATION)	2020
CHARACTERISTIC (DESIGNATION)	2021
TERMINAL ASSEMBLY (DESIGNATION)	2022
TERMINAL FINISH (DESIGNATION)	2023
RATING	
WATT-SECOND RATING (WATT-SECONDS)	1696
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX B	1009
DIMENSION TABLE, (SEE TABLE III, DOD-STD-35)	
*UNITS (SELECT ONE)	
U.S. (INCHES)	7572
SI (MILLIMETERS)	7577

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CLASSIFICATION
2020	STYLE 2020 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
2021	CHARACTERISTIC 2021 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
2022	TERMINAL ASSEMBLY 2022 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
2023	TERMINAL FINISH 2023 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
	RATING.
1696	WATT-SECOND RATING. THE WATT-SECOND RATING SHALL BE 1696, AS CALCULATED USING THE FOLLOWING EQUATION: WATT-SECOND(S) EQUALS ONE-HALF THE PRODUCT OF CAPACITANCE IN FARADS AND THE SQUARE OF THE IMPRESSED DC VOLTAGE IN VOLTS.
	CONFIGURATION
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED SHALL BE IN INCHES OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES,

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX B	4950
NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.	
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	
MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE IX IS USED.	
METALS	
DISSIMILAR METALS.	7580

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.
	MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE : THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
	FINISH(S)* FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.
7580	METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORRQSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION	
ALTITUDE	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	6790
SEA LEVEL TO (METERS)	6791
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	6792
SEA LEVEL TO (METERS)	6793
CASE	
CONNECTION (SELECT ONE)	
SECTION ELECTRICALLY CONNECTED TO CASE.	2083
SECTION ELECTRICALLY ISOLATED FROM CASE.	2082
CASE INSULATED BY SLEEVE.	2083
SEALING (SELECT ONE)	
ENCAPSULATED.	2087
UNENCAPSULATED.	2088
HERMETIC.	1820

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	DESIGN AND CONSTRUCTION
6790	OPERATING ALTITUDE. THE OPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6790 FEET.
6791	OPERATING ALTITUDE- THE OPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6791 METERS.
6792	NONOPERATING ALTITUDE. THE NONOPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6792 FEET.
6793	NONOPERATING ALTITUDE. THE NONOPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6793 METERS.
	CASE.
20811	THE CAPACITOR SECTION SHALL BE ELECTRICALLY CONNECTED TO THE CASE.
2082	THE CAPACITOR SECTION SHALL BE ISOLATED FROM THE CASE.
2083	THE CAPACITOR CASE SHALL BE INSULATED BY MEANS OF A SLEEVE OR EQUIVALENT INSULATION METHOD.
2087	THE DEVICE SHALL BE ENCAPSULATED.
2088	THE DEVICE SHALL BE UNENCAPSULATED.
1820	THE DEVICE SHALL BE HERMETICALLY SEALED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
COOLING MEDIA	
OIL.	2089
DESIGN RELIABILITY	
FAILURE RATE (PERCENT PER 3000 HOURS)	7025
CONFIDENCE LEVEL (PERCENT)	7026
RATING TEMPERATURE (DEGREES CELSIUS)	7029
ELECTRICAL STRESS (PERCENT OF RATED VOLTAGE)	7030
DIELECTRIC VOLTAGE STRESS (SELECT ONE)	
MAXIMUM (VOLTS PER 0.001 INCH)	2078
MAXIMUM (VOLTS PER MILLIMETER)	2079
EXTENDED FOIL TECHNIQUE.	2080

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2089	COOLING MEDIA, THE INTERNAL COOLING MEDIA SHALL BE OIL.
	DESIGN RELIABILITY- THE ITEM(S) SHALL BE DESIGNED, USING MATERIALS AND MANUFACTURING PROCESSES CAPABLE OF MEETING THE FOLLOWING CONDITIONS:
7025	THE FAILURE RATE SHALL BE LESS THAN 7025 PERCENT PER 1000 HOURS.
7026	THE CONFIDENCE LEVEL SHALL BE 7026 PERCENT.
7029	THE DESIGN RELIABILITY SHALL BE AT A TEMPERATURE OF 7029 DEGREES CELSIUS.
7030	THE DESIGN RELIABILITY SHALL BE AT 7030 PERCENT OF THE RATED VOLTAGE.
2078	DIELECTRIC VOLTAGE STRESS. THE CAPACITOR SHALL BE MANUFACTURED SUCH THAT THE VOLTAGE STRESS SHALL BE NOT GREATER THAN 2078 VOLT(S) PER THOUSANDTH OF AN INCH OF DIELECTRIC THICKNESS.
2079	DIELECTRIC VOLTAGE STRESS. THE CAPACITOR SHALL BE MANUFACTURED SUCH THAT THE VOLTAGE STRESS SHALL BE NOT GREATER THAN 2079 VOLT(S) PER MILLIMETER OF DIELECTRIC THICKNESS.
2080	EXTENDED FOIL TECHNIQUE, THE CAPACITOR SECTION SHALL BE MANUFACTURED USING THE EXTENDED FOIL TECHNIQUE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
SCHEMATIC	
*ILLUSTRATION (NUMBER)	3000
*STYLE (NUMBER)	3002
NOTE: SEE APPENDIX B.	
TEMPERATURE	
MAXIMUM OPERATING (DEGREES CELSIUS)	6794
MAXIMUM NONOPERATING (DEGREES CELSIUS)	6795
MAXIMUM STORAGE (DEGREES CELSIUS)	6796
MAXIMUM SERVICE (DEGREES CELSIUS)	6797
MAXIMUM AMBIENT OPERATING (DEGREES CELSIUS)	6798
MINIMUM OPERATING (DEGREES CELSIUS)	6799
MINIMUM STORAGE (DEGREES CELSIUS)	6801
MINIMUM SERVICE (DEGREES CELSIUS)	6802
MINIMUM AMBIENT OPERATING (DEGREES CELSIUS)	6803

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPAH

3000 SCHEMATIC. THE SCHEMATIC IS SPECIFIED BY
3002 ILLUSTRATION 3000 AND STYLE 3002. ADDITIONAL SECTIONS SHOWN BY BROKEN LINES ARE NOT RESTRICTED TO THE NUMBER OF SECTIONS ILLUSTRATED BUT ARE SPECIFIED IN THE ELECTRICAL CHARACTERISTICS TABLE.

6794 MAXIMUM OPERATING TEMPERATURE. THE OPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6794 DEGREES CELSIUS.

6795 MAXIMUM NONOPERATING TEMPERATURE. THE NONOPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6795 DEGREES CELSIUS.

6796 MAXIMUM STORAGE TEMPERATURE. THE STORAGE TEMPERATURE SHALL BE NOT GREATER THAN 6796 DEGREES CELSIUS.

6797 MAXIMUM SERVICE TEMPERATURE. THE SERVICE TEMPERATURE SHALL BE NOT GREATER THAN 6797 DEGREES CELSIUS.

6798 MAXIMUM AMBIENT OPERATING TEMPERATURE. THE AMBIENT OPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6798 DEGREES CELSIUSe

6799 MINIMUM OPERATING TEMPERATURE. THE OPERATING TEMPERATURE SHALL BE NOT LESS THAN 6799 DEGREES CELSIUS.

6801 MINIMUM STORAGE TEMPERATURE. THE STORAGE TEMPERATURE SHALL BE BE NOT LESS THAN 6801 DEGREES CELSIUS,

6802 MINIMUM SERVICE TEMPERATURE. THE SERVICE TEMPERATURE SHALL BE NOT LESS THAN 6802 DEGREES CELSIUS.

6803 MINIMUM AMBIENT OPERATING TEMPERATURE. THE AMBIENT OPERATING TEMPERATURE SHALL BE NOT LESS THAN 6803 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
TEMPERATURE (CONT)	
NOMINAL STORAGE (DEGREES CELSIUS)	6804
NOMINAL OPERATING (DEGREES CELSIUS)	6805
VOLTAGE	
PER ELECTRICAL CHARACTERISITCS TABLE.	
NOTE: SEE APPENDIX A, TABLE III.	
WEIGHT	
MAXIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI	
(GRAMS)	7021
CAPACITANCE	
REQUIREMENTS PER ELECTRICAL CHARACTERISTICS TABLE.	
NOTE: SEE APPENDIX A, TABLE III (SELECT MICROFARADS OR PICOFARADS)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH

6804 NOMINAL STORAGE TEMPERATURE. THE STORAGE TEMPERATURE SHALL BE 6804 DEGREES CELSIUS.

6805 NOMINAL OPERATING TEMPERATURE. THE OPERATING TEMPERATURE SHALL BE 6805 DEGREES CELSIUS.

7022 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).

7023 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).

7021 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CAPACITANCE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1566
PER MIL-STD-202, METHOD 305.	1568
*TEST FREQUENCY (HERTZ)	1570
TEST FREQUENCY TOLERANCE (HERTZ)	1571
ACCURACY OF TEST EQUIPMENT (PERCENT)	1572
POLARIZING VOLTAGE (VOLTS, DC)	1573
IMPRESSED VOLTAGE	
MAXIMUM (VOLTS)	1574
MINIMUM (VOLTS)	2571
TEST VOLTAGE (VOLTS)	2568
TEST TEMPERATURE (DEGREES CELSIUS)	2569
CAPACITANCE DRIFT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1990

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1566	CAPACITANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1566.
1568	CAPACITANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 305 OF MIL-STD-202.
1570	THE TEST FREQUENCY SHALL BE 1570 HERTZ.
1571	THE TEST FREQUENCY TOLERANCE SHALL BE 1571 HERTZ.
1572	THE ACCURACY OF THE TEST EQUIPMENT SHALL BE WITHIN 1572 PERCENT OF THE READING.
1573	THE POLARIZING VOLTAGE SHALL BE 1573 VOLT(S) DC.
1574	THE IMPRESSED VOLTAGE SHALL BE NOT GREATER THAN 1574 VOLT(S).
2571	THE IMPRESSED VOLTAGE SHALL BE NOT LESS THAN 2571 VOLT(S).
2568	THE TEST VOLTAGE SHALL BE 2568 VOLT(S).
2569	THE TEST TEMPERATURE SHALL BE 2569 DEGREES CELSIUS.
1990	CAPACITANCE DRIFT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1990.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CAPACITANCE DRIFT (CONT)	
REQUIREMENTS (CONT)	
GREATER OF 0.2 PICOFARAD OR (PERCENT)	1613
GREATER OF 0.1 PICOFARAD OR (PERCENT)	1991
GREATER OF 0.05 PICOFARAD OR (PERCENT)	1992
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3987
PER TEMPERATURE COEFFICIENT TEST,	1988
CORONA	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2101
AS FOLLOWS:	2107
MINIMUM CORONA STARTING VOLTAGE (VOLTS)	2102
MINIMUM CORONA EXTINCTION VOLTAGE (VOLTS)	2103

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1613	CAPACITANCE DRIFT. CAPACITANCE CHANGE SHALL BE THE GREATER OF 1613 PERCENT OR 002 PICOFARAD.
1991	CAPACITANCE DRIFT. CAPACITANCE CHANGE SHALL BE THE GREATER OF 1991 PERCENT OR 0.1 PICOFARAD.
1992	CAPACITANCE DRIFT. CAPACITANCE CHANGE SHALL BE THE GREATER OF 1992 PERCENT OR 0005 PICOFARAD.
1987	CAPACITANCE DRIFT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1987.
1988	CAPACITANCE DRIFT. TESTING SHALL BE IN ACCORDANCE WITH THE TEMPERATURE COEFFICIENT TEST. THE DRIFT SHALL BE COMPUTED BY DIVIDING THE GREATEST SINGLE DIFFERENCE BETWEEN TWO OF THE THREE CAPACITANCE VALUES RECORDED AT 25 DEGREES CELSIUS BY THE VALUE DETERMINED AT THE REFERENCE TEMPERATURE.
2101	CORONA, THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2101.
2107	CORONA. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2102	THE VOLTAGE AT WHICH CORONA IS CONTINUOUS FOR MORE THAN 20 SECONDS (CORONA STARTING VOLTAGE) SHALL BE NOT LESS THAN 2102 VOLT(S).
2103	THE VOLTAGE AT WHICH CORONA DISAPPEARS COMPLETELY (CORONA EXTINCTION VOLTAGE) SHALL BE NOT LESS THAN 2103 VOLT(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERSITIC NAME	CHAR CODE
CORONA (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM APPARENT CORONA CHARGE AT CORONA STARTING VOLTAGE (PICOCOULOMBS)	2104
MAXIMUM CORONA CHARGE (PICOCOULOMBS)	2106
*AT TEST VOLTAGE (VOLTS)	2105
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2111
PER ASTMD1868.	2112
EQUIPMENT SENSITIVITY (PICOCOULOMBS)	2113
TEST VOLTAGE (VOLTS)	2114
TEST VOLTAGE TYPE (SELECT ONE)	
DC.	2116
AC.	2117
TEST VOLTAGE (PERCENT OF RATED)	2115
TEST VOLTAGE FREQUENCY (HERTZ)	2118
TEST VOLTAGE (VOLTS RMS) SUPERIMPOSED ON	2119
*VOLTAGE (VOLTS, DC)	2120

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2104	THE APPARENT CORONA CHARGE SHALL BE NOT GREATER THAN 2104 PICOCOULOMB(S) AT THE CORONA STARTING VOLTAGE.
2306 2105	THE APPARENT CORONA CHARGE SHALL BE NOT GREATER THAN 2106 PICOCOULOMB(S) AT 2105 VOLT(S).
2111	CORONA. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2111-
2312	CORONA. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD1868.
2113	THE EQUIPMENT SHALL HAVE THE CAPABILITY OF DETECTING A PULSE LEVEL OF 2113 PICOCOULOMB(S).
2114	THE TEST VOLTAGE SHALL BE 2114 VOLT(S).
2116	THE TEST VOLTAGE SHALL BE DC.
2117	THE TEST VOLTAGE SHALL BE AC.
2115	THE TEST VOLTAGE SHALL BE 2115 PERCENT OF RATED VOLTAGE.
2118	THE TEST VOLTAGE FREQUENCY SHALL BE 2118 HERTZ.
2119 2120	THE TEST VOLTAGE SHALL BE 2119 VOLT(S) RMS SUPERIMPOSED ON A DC VOLTAGE OF 2120 VOLT(S)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CURRENT RATING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1737
PER ELECTRICAL CHARACTERISTICS TABLE.	1735
*NOTE: SEE APPENDIX A, TABLE III.	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1739
AS FOLLOWS:	1697
TEST FREQUENCY (HERTZ)	1741
TEST VOLTAGE (VOLTS)	1742
TEST TEMPERATURE (DEGREES CELSIUS)	1744
CURRENT RATING, PULSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1726
AS FOLLOWS:	1734

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1737	CURRENT RATING, THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1737.
1735	CURRENT RATING, THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE VALUE(S) LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE.
1739	CURRENT RATING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1739.
1697	CURRENT RATING. TESTING SHALL BE PERFORMED AS FOLLOWS:
1741	THE TEST SHALL BE CONDUCTED AT A FREQUENCY OF 1741 HERTZ.
1742	THE TEST SHALL BE CONDUCTED AT A VOLTAGE OF 1742 VOLT(S).
1744	THE TEST SHALL BE CONDUCTED AT A TEMPERATURE OF 1744 DEGREES CELSIUS.
1726	CURRENT RATING, PULSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1726.
1734	CURRENT RATING, PULSE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CURRENT RATING, PULSE (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM TEMPERATURE RISE (DEGREES CELSIUS)	1711
DESIGN LIFE	
MINIMUM NUMBER OF PULSES (QUANTITY)	1786
PULSE RATE (PULSES PER SECOND)	1788
PER ELECTRICAL CHARACTERISTICS TABLE.	1740
*NOTE: SEE APPENDIX A, TABLE III-	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1728
AS FOLLOWS:	1745
PULSE PEAK CURRENT (AMPERES)	1730
PULSE REPETITION RATE (PULSES PER SECOND)	2097
PULSE RISE TIME (MICROSECONDS)	1731
PULSE FALL TIME (MICROSECONDS)	1732
PULSE DURATION (MICROSECONDS)	2096
TEST TEMPERATURE (DEGREES CELSIUS)	1733

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1711	THE CAPACITOR TEMPERATURE RISE SHALL BE NOT GREATER THAN 1711 DEGREES CELSIUS.
1786	THE ITEM(S) SHALL HAVE A DESIGN LIFE OF NOT LESS THAN 1786 PULSE(S).
1788	THE LIFE PULSE RATE SHALL BE 1788 PULSES PER SECOND.
1740	THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE VALUE(S) LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE.
1728	CURRENT RATING, PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1728.
1745	CURRENT RATING, PULSE. TESTING SHALL BE PERFORMED AS FOLLOWS:
1730	THE CURRENT PULSE PEAK SHALL BE 1730 AMPERE(S).
2097	THE PULSE REPETITION RATE SHALL BE 2097 PULSE(S) PER SECOND.
1731	THE PULSE RISE TIME SHALL BE 1731 MICROSECOND(S).
1732	THE PULSE FALL TIME SHALL BE 1732 MICROSECOND(S).
2096	THE PULSE DURATION SHALL BE 2096 MICROSECOND(S).
1733	THE TEST TEMPERATURE SHALL BE 1733 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CURRENT RATING, PULSE (CONT)	
AS FOLLOWS: (CONT)	
TEST DURATION (SECONDS)	3001
PEAK CHARGE (VOLTS)	1774
PEAK CHARGE TIME (MILLISECONDS)	1775
TIME-ON-CHARGE BEFORE DISCHARGE (MILLISECONDS)	1776
MAXIMUM VOLTAGE REVERSAL (PERCENT)	1777
MAXIMUM RINGING FREQUENCY (KILOHERTZ)	%78%
MINIMUM RINGING RISE TIME (NANOSECONDS)	1782
DC LEAKAGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1647
PER ELECTRICAL CHARACTERISTICS TABLE.	1648
*NOTE: SEE APPENDIX A, TABLE III.	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1652

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3001	THE TEST DURATION SHALL BE 3001 SECOND(S).
1774	THE PEAK CHARGE SHALL BE 1774 VOLT(S).
1775	THE PEAK CHARGE TIME SHALL BE 1775 MILLISECOND(S).
1776	THE TIME-ON-CHARGE BEFORE DISCHARGE SHALL BE 1776 MILLISECOND(S).
1777	THE VOLTAGE REVERSAL SHALL BE NOT GREATER THAN 1777 PERCENT.
1781	THE RINGING FREQUENCY SHALL BE NOT GREATER THAN 1781 KILOHERTZ.
1782	THE RINGING RISE TIME SHALL BE NOT LESS THAN 1782 NANOSECOND(S).
1647	DC LEAKAGE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1647.
1648	DC LEAKAGE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE VALUE(S) LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE.
1652	DC LEAKAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1652.

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DC LEAKAGE (CONT)	
TEST METHODS (CONT)	
AS FOLLOWS:	1649
TEST VOLTAGE (PERCENT OF RATED)	1743
TEST TEMPERATURE (DEGREES CELSIUS)	1749
MAXIMUM ELECTRIFICATION TIME (MINUTES)	1653
MAXIMUM CHARGING CURRENT (MILLIAMPERES)	1585
MEASUREMENT ACCURACY WITHIN (PERCENT)	1586
DC RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2559
MAXIMUM RESISTANCE (OHMS)	2560
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2562
AS FOLLOWS:	2563

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1649 DC LEAKAGE. TESTING SHALL BE PERFORMED AS FOLLOWS:

1743 TESTING SHALL BE AT 1743 PERCENT OF RATED VOLTAGE.

1749 THE TEST TEMPERATURE SHALL BE 1749 DEGREES CELSIUS.

1653 THE ELECTRIFICATION TIME SHALL BE NOT GREATER THAN 1653 MINUTE(S).

1585 THE CHARGING CURRENT SHALL BE NOT GREATER THAN 1585 MILLIAMPERE(S).

1586 THE MEASUREMENT ACCURACY SHALL BE WITHIN 1586 PERCENT OF THE MEASURED CURRENT.

2559 DC RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2559.

2560 DC RESISTANCE. THE RESISTANCE SHALL BE NOT GREATER THAN 2560 OHM(S).

2562 DC RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2562.

2563 DC RESISTANCE. TESTING SHALL BE PERFORMED AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DC RESISTANCE (CONT)	
AS FOLLOWS: (CONT)	
TEST CURRENT (SELECT ONE)	
(AMPERES)	2564
(PERCENT OF RATED)	2565
TEST TEMPERATURE (DEGREES CELSIUS)	2566
TEST DURATION (MINUTES)	2567
DIELECTRIC ABSORPTION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1941
MAXIMUM DIELECTRIC ABSORPTION (PERCENT)	1942
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1930
AS FOLLOWS:	1945
MAXIMUM TEST VOLTAGE (VOLTS, DC)	1932
MINIMUM ELECTRIFICATION TIME (MINUTES)	1933

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2564	THE TEST CURRENT SHALL BE 2564 AMPERE(S).
2565	THE TEST CURRENT SHALL BE 2565 PERCENT OF THE RATED CURRENT.
2566	THE TEST TEMPERATURE SHALL BE 2566 DEGREES CELSIUS.
2567	THE TEST DURATION SHALL BE 2567 MINUTE(S).
1941	DIELECTRIC ABSORPTION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1941.
1942	DIELECTRIC ABSORPTION. THE DIELECTRIC ABSORPTION SHALL BE NOT GREATER THAN 1942 PERCENT.
1930	DIELECTRIC ABSORPTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1930.
1945	DIELECTRIC ABSORPTION. TESTING SHALL BE PERFORMED AS FOLLOWS:
1932	TEST VOLTAGE SHALL BE NOT GREATER THAN 1932 VOLT(S) DC.
1933	ELECTRIFICATION TIME SHALL BE NOT LESS THAN 1933 MINUTE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC ABSORPTION (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM RECOVERY VOLTAGE (VOLTS, DC)	1934
MAXIMUM INITIAL SURGE CURRENT (MILLIAMPERES)	1935
DISCHARGE	
RESISTOR (OHMS)	1936
TOLERANCE (PERCENT)	1937
DURATION (SECONDS)	1938
TOLERANCE (SECONDS)	1939
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4908
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4906
MAXIMUM CAPACITANCE CHANGE (PERCENT)	1650

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1934	RECOVERY VOLTAGE SHALL BE NOT GREATER THAN 1934 VOLT(S) DC.
1935	INITIAL SURGE CURRENT SHALL BE NOT GREATER THAN 1935 MILLIAMPERE(S).
1936	A 1936 OHM RESISTOR SHALL BE USED FOR DISCHARGING THE CAPACITOR.
1937	THE RESISTOR TOLERANCE SHALL BE 1937 PERCENT.
1938	DURATION OF THE DISCHARGE SHALL BE 1938 SECOND(S).
1939	THE DISCHARGE DURATION TOLERANCE SHALL BE 1939 SECOND(S).
4908	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4908.
4906	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
1650	THE CHANGE IN CAPACITANCE SHALL BE NOT GREATER THAN 1650 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN. (CONT)	
MAXIMUM DC LEAKAGE (MILLIAMPERES)	2296
PER ELECTRICAL CHARACTERISTICS TABLE.	2169
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4884
PER MIL-STD-202, METHOD 301.	6300
*ALTITUDE (SELECT ONE)	
PER MIL-STD-202, METHOD 105, TEST CONDITION (LETTER)	4886
TEST PRESSURE EQUIVALENT (SELECT ONE)	
(FEET)	6303
(METERS)	6304

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2296	THE DC LEAKAGE SHALL BE NOT GREATER THAN 2296 MILLIAMPERE(S).
2169	THE ITEM(S) SHALL MEET THE REQUIREMENT(S) LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE AFTER THE TEST.
4884	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4884.
6300	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.
4886	ALTITUDE SHALL BE IN ACCORDANCE WITH TEST CONDITION LETTER 4886 OF METHOD 105 OF MIL-STD-202.
6303	THE TEST PRESSURE SHALL BE EQUIVALENT TO AN ALTITUDE OF 6303 FEET.
6304	THE TEST PRESSURE SHALL BE EQUIVALENT TO AN ALTITUDE OF 6304 METERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4885
(VOLTS, AC)	4849
TEST FREQUENCY (HERTZ)	6307
DURATION OF VOLTAGE APPLICATION (SECONDS)	4891
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4902
(MILLIAMPERES)	6310
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	6312
BETWEEN MUTUALLY INSULATED PARTS.	6292
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4874

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4885	TEST VOLTAGE SHALL BE 4885 VOLTS, DC.
4849	TEST VOLTAGE SHALL BE 4849 VOLTS, AC.
6307	FREQUENCY OF THE TEST VOLTAGE SHALL BE 6307 HERTZ.
4891	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4891 SECOND(S).
4902	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4902 AMPERE(S).
6310	THE SURGE CURRENT SHALL BE NOT GREATER THAN 6310 MILLIAMPERE(S).
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
6312	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
6292	BETWEEN MUTUALLY INSULATED PARTS.
4874	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4856
MAXIMUM CAPACITANCE CHANGE (PERCENT)	2170
MAXIMUM DC LEAKAGE (MILLIAMPERES)	2171
PER ELECTRICAL CHARACTERISTICS TABLE.	1814
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4861
PER MIL-STD-202, METHOD 301.	4862
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4854
(VOLTS, AC)	4855
TEST VOLTAGE FREQUENCY (HERTZ)	4852

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4856	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
2170	THE CHANGE IN CAPACITANCE SHALL BE NOT GREATER THAN 2170 PERCENT.
2171	THE DC LEAKAGE SHALL BE NOT GREATER THAN 2171 MILLIAMPERE(S).
1814	THE ITEM(S) SHALL MEET THE REQUIREMENT(S) LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE AFTER THE TEST.
4861	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861.
4862	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.
4854	TEST VOLTAGE SHALL BE 4854 VOLTS, DC.
4855	TEST VOLTAGE SHALL BE 4855 VOLTS, AC.
4852	FREQUENCY OF THE TEST VOLTAGE SHALL BE 4852 HERTZ.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
DURATION OF VOLTAGE APPLICATION (SECONDS)	4867
MAXIMUM (SURGE CURRENT (SELECT ONE)	
(AMPERES)	4717
(MILLIAMPERES)	4897
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	4848
BETWEEN MUTUALLY INSULATED PARTS.	4844
DISSIPATION FACTOR	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1655
PER ELECTRICAL CHARACTERISTICS TABLE.	3677
*NOTE: SEE APPENDIX A, TABLE III.	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1657

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4867	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4867 SECOND(S).
4717	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4717 AMPERE(S).
4897	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4897 MILLIAMPERE(S).
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
4848	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
4844	BETWEEN MUTUALLY INSULATED PARTS.
1655	DISSIPATION FACTOR. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1655.
3677	DISSIPATION FACTOR. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE VALUE(S) LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE.
1657	DISSIPATION FACTOR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1657.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DISSIPATION FACTOR (CONT)	
TEST METHODS (CONT)	
AS FOLLOWS:	1678
TEST FREQUENCY (HERTZ)	1592
TEST TEMPERATURE (DEGREES CELSIUS)	1591
MAXIMUM TEST VOLTAGE (VOLTS, RMS)	1593
POLARIZING VOLTAGE (VOLTS, DC)	1595
MEASUREMENT ACCURACY WITHIN (PERCENT)	1594
TEST VOLTAGE (VOLTS)	2570
EQUIVALENT SERIES RESISTANCE (ESR)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1755
PER ELECTRICAL CHARACTERISTICS TABLE.	1768
*NOTE: SEE APPENDIX A, TABLE III.	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	1757

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1678	DISSIPATION FACTOR. TESTING SHALL BE PERFORMED AS FOLLOWS:
1592	TESTING SHALL BE PERFORMED AT A FREQUENCY OF 1592 HERTZ.
1591	THE TEST TEMPERATURE SHALL BE 1591 DEGREES CELSIUS.
1593	THE TEST VOLTAGE SHALL BE NOT GREATER THAN 1593 VOLT(S) RMS.
1595	THE POLARIZING VOLTAGE SHALL BE 1595 VOLT(S) DC.
1594	THE- EQUIPMENT MEASURING ACCURACY SHALL BE WITHIN 1594 PERCENT.
2570	THE TEST VOLTAGE SHALL BE 2570 VOLT(S).
1755	EQUIVALENT SERIES RESISTANCE (ESR). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1755.
1768	EQUIVALENT SERIES RESISTANCE (ESR). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE VALUE(S) LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE.
1757	EQUIVALENT SERIES RESISTANCE (ESR). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1757.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
EQUIVALENT SERIES RESISTANCE (ESR) (CONT)	
TEST METHODS (CONT)	
AS FOLLOWS:	1769
TEST FREQUENCY (HERTZ)	1758
TEST VOLTAGE (VOLTS)	1759
POLARIZING VOLTAGE (VOLTS, DC)	1760
TEST TEMPERATURE (DEGREES CELSIUS)	
FLASH POINT, IMPREGNANT/FILLING COMPOUND	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	
MINIMUM FLASH POINT (DEGREES CELSIUS)	2132
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2136
PER ASTMD92.	2137

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1769	EQUIVALENT SERIES RESISTANCE (ESR). TESTING SHALL BE PERFORMED AS FOLLOWS:
1758	THE TEST SHALL BE CONDUCTED AT A FREQUENCY OF 1758 HERTZ.
1759	THE TEST SHALL BE CONDUCTED AT A VOLTAGE OF 1759 VOLT(S).
1760	THE TEST SHALL BE CONDUCTED AT A POLARIZING VOLTAGE OF 1760 VOLT(S) DC.
1761	THE TEST TEMPERATURE SHALL BE 1761 DEGREES CELSIUS.
2131	FLASH POINT, IMPREGNANT/FILLING COMPOUND. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2131.
2132	FLASH POINT, IMPREGNANT/FILLING COMPOUND. THE FLASH POINT SHALL BE NOT LESS THAN 2132 DEGREES CELSIUS.
2136	FLASH POINT, IMPREGNANT/FILLING COMPOUND. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2136.
2137	FLASH POINT, IMPREGNANT/FILLING COMPOUND. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD92 EXCEPT THAT THE FIRE POINT AND PRECISION DO NOT APPLY. IMPREGNANT OR FILLING COMPOUND SHALL BE SUBSTITUTED FOR THE WORD OIL THROUGHOUT THE TEST METHOD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FREQUENCY, OPERATING RANGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1891
AS FOLLOWS:	1944
MAXIMUM TEMPERATURE RISE AT MINIMUM FREQUENCY (DEGREES CELSIUS)	1897
MAXIMUM TEMPERATURE RISE AT MAXIMUM FREQUENCY (DEGREES CELSIUS)	1898
MAXIMUM INSERTION LOSS AT MAXIMUM FREQUENCY (DECIBELS)	1993
MAXIMUM INSERTION LOSS AT MINIMUM FREQUENCY (DECIBELS)	1994
MAXIMUM INSERTION LOSS AT INTERMEDIATE FREQUENCIES (DECIBELS)	1995
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1893
TEST PER MIL-STD-220.	1889

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1891	FREQUENCY, OPERATING RANGE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1891.
1944	FREQUENCY, OPERATING RANGE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1897	AT THE MINIMUM OPERATING FREQUENCY, THE TEMPERATURE RISE SHALL BE NOT GREATER THAN 1897 DEGREES CELSIUS.
1898	AT THE MAXIMUM OPERATING FREQUENCY, THE TEMPERATURE RISE SHALL BE NOT GREATER THAN 1898 DEGREES CELSIUS.
1993	AT THE MAXIMUM OPERATING FREQUENCY, THE INSERTION LOSS SHALL BE NOT GREATER THAN 1993 DECIBEL(S).
1994	AT THE MINIMUM OPERATING FREQUENCY, THE INSERTION LOSS SHALL BE NOT GREATER THAN 1994 DECIBEL(S).
1995	AT THE RESPECTIVE INTERMEDIATE TEST FREQUENCY(S), THE INSERTION LOSS(S) SHALL BE NOT GREATER THAN 1995 DECIBEL(S).
1893	FREQUENCY, OPERATING RANGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1893.
1889	FREQUENCY, OPERATING RANGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-220 AT THE FOLLOWING FREQUENCY(S):

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FREQUENCY, OPERATING RANGE (CONT)	
TEST PER MIL-STD-220. (CONT)	
*MINIMUM TEST FREQUENCY (MEGAHERTZ)	1894
*MAXIMUM TEST FREQUENCY (MEGAHERTZ)	1895
INTERMEDIATE FREQUENCIES (MEGAHERTZ)	1896
FREQUENCY RATING, CONTINUOUS CURRENT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1968
PER ELECTRICAL CHARACTERISTICS TABLE.	1772
*NOTE: SEE APPENDIX A, TABLE III.	
MAXIMUM TEMPERATURE RISE (DEGREES CELSIUS)	1963
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1778
PER MIL-STD-202, METHOD 108.	1771

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1894	THE TEST FREQUENCY SHALL BE NOT LESS THAN 1894 MEGAHERTZ.
1895	THE TEST FREQUENCY SHALL BE NOT GREATER THAN 1895 MEGAHERTZ.
1896	INTERMEDIATE TEST FREQUENCY(S) SHALL BE 1896 MEGAHERTZ.
	FREQUENCY RATING, CONTINUOUS CURRENT. THE EQUIPMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1968.
1772	FREQUENCY RATING, CONTINUOUS CURRENT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE VALUE(S) LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE .
1963	THE TEMPERATURE RISE DUE TO INTERNAL HEATING SHALL BE NOT GREATER THAN 1963 DEGREES CELSIUS.
1778	FREQUENCY RATING, CONTINUOUS CURRENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1778.
1771	FREQUENCY RATING, CONTINUOUS CURRENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 108 OF MIL-STD-202 AND THE FOLLOWING CONDITION(S):

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FREQUENCY RATING, CONTINUOUS CURRENT (CONT)	
PER MIL-STD-202, METHOD 108. (CONT)	
*DURATION (SELECT ONE)	
TEST CONDITION (LETTER)	1789
(HOURS)	1795
MAXIMUM TEST VOLTAGE (VOLTS)	1950
TEST FREQUENCY (HERTZ)	1952
TEST TEMPERATURE (DEGREES CELSIUS)	1955
VOLTAGE WAVE SHAPE (NAME)	1956
VOLTAGE RISE TIME (SELECT ONE)	
(MICROSECONDS)	1957
(MILLISECONDS)	1958
VOLTAGE FALL TIME (SELECT ONE)	
(MICROSECONDS)	1959
(MILLISECONDS)	1960
VOLTAGE DUTY CYCLE (PERCENT)	1961
STILL AIR REQUIRED.	196Z

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1789	TEST CONDITION LETTER 1789 SHALL APPLY.
1795	THE TEST SHALL BE PERFORMED FOR 1795 HOUR(S).
1950	THE APPLIED TEST VOLTAGE SHALL BE NOT GREATER THAN 1950 VOLT(S).
1952	THE TEST VOLTAGE SHALL BE AT A FREQUENCY OF 1952 HERTZ.
1955	THE TEST TEMPERATURE SHALL BE 1955 DEGREES CELSIUS.
1956	THE VOLTAGE WAVE SHAPE SHALL BE 1956.
1957	THE VOLTAGE RISE TIME SHALL BE 1957 MICROSECOND(S).
1958	THE VOLTAGE" RISE TIME SHALL BE 1958 MILLISECOND(S).
1959	THE VOLTAGE FALL TIME SHALL BE 1959 MICROSECOND(S).
1960	THE VOLTAGE FALL TIME SHALL BE 1960 MILLISECOND(S).
1961	THE VOLTAGE DUTY CYCLE SHALL BE 1961 PERCENT.
1962	TEST CHAMBER SHALL HAVE STILL AIR.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4760
FUNGUS RESISTANT BY CERTIFICATION OR BY TEST.	4761
NO EVIDENCE OF FUNGUS GROWTH WHEN TESTED.	4762
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4754
PER MIL-STD-810, METHOD 508.	4755
TEST PERIOD (DAYS)	4756
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4798

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4760	FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.
4761	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED? THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4762	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4754	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.
4755	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.
4756	TEST PERIOD SHALL BE 4756 DAY(S).
4798	HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	4799
NO DEGRADATION OF PERFORMANCE.	4815
REMAIN WITHIN SPECIFIED TOLERANCE.	4793
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1477
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	4805
MAXIMUM DC LEAKAGE AFTER DRYING (MILLIAMPERES)	4803
MAXIMUM CAPACITANCE CHANGE AFTER DRYING (PERCENT)	4802
MAXIMUM DISSIPATION FACTOR AFTER DRYING (PERCENT)	4806
PER ELECTRICAL CHARACTERISTICS TABLE.	1770

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4799	HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
4815	THERE SHALL BE NO DEGRADATION OF PERFORMANCE.
47911	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1477	THERE SHALL BE NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DIELECTRIC WITHSTANDING VOLTAGE IS PERFORMED.
4805	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4805 MEGOHM(S) AFTER DRYING.
4803	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4803 MILLIAMPERE(S) AFTER DRYING.
4802	CAPACITANCE CHANGE SHALL BE NOT GREATER THAN 4802 PERCENT AFTER DRYING.
4806	DISSIPATION FACTOR SHALL BE NOT GREATER THAN 4806 PERCENT AFTER DRYING.
1770	THE ITEM(S) SHALL MEET THE REQUIREMENT(S) LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE AFTER THE TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4788
PER MIL-STD-202, METHOD 103.	4853
*TEST CONDITION (LETTER)	4890
POLARIZING VOLTAGE (VOLTS, DC)	4793
DURATION OF POLARIZING VOLTAGE APPLICATION (HOURS)	4790
POINTS OF APPLICATION OF POLARIZING VOLTAGE:	
BETWEEN MUTUALLY INSULATED PARTS.	4969
BETWEEN ALL INSULATED PARTS AND GROUND.	4970
BETWEEN CURRENT CARRYING PARTS AND CASE.	4971
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	6206
PERFORM INSULATION RESISTANCE TEST AFTER DRYING.	6208

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH
4788	HUMIDITY.	TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.
4853	HUMIDITY.	TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 103 OF MIL-STD-202.
4890		TEST CONDITION LETTER 4890 SHALL APPLY.
4793		MAGNITUDE OF THE POLARIZING VOLTAGE SHALL BE 4793 VOLTS, DC.
4790		DURATION OF APPLICATION OF VOLTAGE SHALL BE 4790 HOUR(S).
		POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
4969		BETWEEN MUTUALLY INSULATED PARTS.
4970		BETWEEN ALL INSULATED PARTS AND GROUND.
4971		BETWEEN CURRENT CARRYING PARTS AND THE CASE.
6206		DIELECTRIC WITHSTANDING VOLTAGE TEST SHALL BE PERFORMED AFTER DRYING.
6208		INSULATION RESISTANCE TEST SHALL BE PERFORMED AFTER DRYING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMMERSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4819
NO EVIDENCE OF PHYSICAL DAMAGE.	4820
MAXIMUM CAPACITANCE CHANGE (PERCENT)	2073
MAXIMUM DC LEAKAGE (MILLIAMPERES)	2074
MINIMUM INSULATION RESISTANCE (MEGOHMS)	4825
MAXIMUM DISSIPATION FACTOR (PERCENT)	2075
PER ELECTRICAL CHARACTERISTICS TABLE.	1773
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4809
PER MIL-STD-202, METHOD 104.	4810
*TEST CONDITION (LETTER)	4811
MEASUREMENTS AFTER FINAL CYCLE (HOURS)	4812
TIME BEFORE MEASUREMENTS AFTER FINAL CYCLE (HOURS)	4814

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4819	IMMERSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4819.
4920	IMMERSION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2073	THE CHANGE IN CAPACITANCE SHALL BE NOT GREATER THAN 2073 PERCENT.
2074	THE DC LEAKAGE SHALL BE NOT GREATER THAN 2074 MILLIAMPERE(S).
4825	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 4825 MEGOHM(S).
2075	THE DISSIPATION FACTOR SHALL BE NOT GREATER THAN 2075 PERCENT.
1773	THE ITEM(S) SHALL MEET THE REQUIREMENT(S) LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE AFTER THE TEST.
4809	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4809.
4810	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 104 OF MIL-STD-202.
4811	TEST CONDITION LETTER 4811 SHALL APPLY.
4812	FINAL MEASUREMENT(S) SHALL BE MADE WITHIN 4812 HOUR(S) AFTER FINAL CYCLE.
4814	MEASUREMENTS SHALL BE NOT MADE UNTIL 4814 HOUR(S) AFTER THE FINAL CYCLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMPEDANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1679
PER ELECTRICAL CHARACTERISTICS TABLE.	1623
NOTE: SEE APPENDIX A, TABLE III.	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1687
AS FOLLOWS:	1627
TEST FREQUENCY (HERTZ)	1625
TEST TEMPERATURE (DEGREES CELSIUS)	1626
MAXIMUM TEST VOLTAGE (VOLTS, RMS)	1688
POLARIZING VOLTAGE (VOLTS, DC)	1691
MEASUREMENT ACCURACY WITHIN (PERCENT)	1693
PERMIT TRANSFER METHOD AT HIGH FREQUENCIES.	1694
INDUCTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2049

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1679	IMPEDENCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1679.
1623	IMPEDANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE VALUE(S) LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE.
1687	IMPEDANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1687.
1627	IMPEDANCE. TESTING SHALL BE PERFORMED AS FOLLOWS:
1625	TESTING SHALL BE PERFORMED AT A FREQUENCY OF 1625 HERTZ.
1626	THE TEST TEMPERATURE SHALL BE 1626 DEGREES CELSIUS.
1688	THE TEST VOLTAGE SHALL BE NOT GREATER THAN 1688 VOLT(S) RMS.
1691	THE POLARIZING VOLTAGE SHALL BE 1691 VOLT(S) DC.
1693	THE EQUIPMENT MEASURING ACCURACY SHALL BE WITHIN 1693 PERCENT.
1694	TRANSFER IMPEDANCE METHODS MAY BE EMPLOYED AT HIGH FREQUENCIES WHEN LEAD INDUCTANCE BECOMES A LIMITING FACTOR.
2049	INDUCTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2049.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INDUCTANCE (CONT)	
REQUIREMENTS (CONT)	
MAXIMUM INDUCTANCE (MICROHENRIES)	2052
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2043
SELF-RESONANT FREQUENCY OR RINGING FREQUENCY.	2044
SELF-RESONANT FREQUENCY.	2046
RINGING FREQUENCY.	2047
INSERTION LOSS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2041
AS FOLLOWS:	1911
*FIRST FREQUENCY (MEGAHERTZ)	1912
MAXIMUM INSERTION LOSS (DECIBELS)	1913
MINIMUM INSERTION LOSS (DECIBELS)	1996

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2052	INDUCTANCE. THE INDUCTANCE SHALL BE NOT GREATER THAN 2052 MICROHENRY(S).
2043	INDUCTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2043.
2044	INDUCTANCE. TESTING SHALL BE PERFORMED BY SELF-RESONANT FREQUENCY OR RINGING FREQUENCY METHOD.
2046	INDUCTANCE. TESTING SHALL BE PERFORMED BY THE SELF-RESONANT METHOD.
2047	INDUCTANCE. TESTING SHALL BE PERFORMED BY THE RINGING FREQUENCY METHOD.
2041	INSERTION LOSS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2041.
1911	INSERTION LOSS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1912	THE FIRST FREQUENCY SHALL BE 1912 MEGAHERTZ.
1913	THE INSERTION LOSS SHALL BE NOT GREATER THAN 1913 DECIBEL(S).
1996	THE INSERTION LOSS SHALL BE NOT LESS THAN 1996 DECIBEL(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSERTION LOSS (CONT)	
AS FOLLOWS: (CONT)	
SECOND FREQUENCY (MEGAHERTZ)	1915
MAXIMUM INSERTION LOSS (DECIBELS)	1916
MINIMUM INSERTION LOSS (DECIBELS)	1997
THIRD FREQUENCY (MEGAHERTZ)	1917
MAXIMUM INSERTION LOSS (DECIBELS).	1918
MINIMUM INSERTION LOSS (DECIBELS)	1998
FOURTH FREQUENCY (MEGAHERTZ)	1919
MAXIMUM INSERTION LOSS (DECIBELS)	1920
MINIMUM INSERTION LOSS (DECIBELS)	1999
FIFTH FREQUENCY (MEGAHERTZ)	1923
MAXIMUM INSERTION LOSS (DECIBELS)	1924
MINIMUM INSERTION LOSS (DECIBELS)	2000
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2031
PER MIL-STD-220 AT REQUIREMENTS FREQUENCIES.	2032

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1915	THE SECOND FREQUENCY SHALL BE 1915 MEGAHERTZ.
1916	THE INSERTION LOSS SHALL BE NOT GREATER THAN 1916 DECIBEL(S).
1997	THE INSERTION LOSS SHALL BE NOT LESS THAN 1997 DECIBEL(S).
1917	THE THIRD FREQUENCY SHALL BE 1917 MEGAHERTZ.
1918	THE INSERTION LOSS SHALL BE NOT GREATER THAN 1918 DECIBEL(S).
1998	THE INSERTION LOSS SHALL BE NOT LESS THAN 1998 DECIBEL(S).
1919	THE FOURTH FREQUENCY SHALL BE 1919 MEGAHERTZ.
1920	THE INSERTION LOSS SHALL BE NOT GREATER THAN 1920 DECIBEL(S).
1999	THE INSERTION LOSS SHALL BE NOT LESS THAN 1999 DECIBEL(S).
1923	THE FIFTH FREQUENCY SHALL BE 1923 MEGAHERTZ.
1924	THE INSERTION LOSS SHALL BE NOT GREATER THAN 1924 DECIBEL(S).
2000	THE INSERTION LOSS SHALL BE NOT LESS THAN 2000 DECIBEL(S).
2031	INSERTION LOSS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2031.
2032	INSERTION LOSS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-220 AT THE REQUIREMENTS FREQUENCY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1380
AS FOLLOWS:	6359
*MINIMUM INSULATION RESISTANCE (SELECT ONE)	
PER ELECTRICAL CHARACTERISTICS TABLE FOR SINGLE TEST.	1824
*NOTE: SEE APPENDIX A, TABLE III.	
MINIMUM INSULATION RESISTANCE FOR MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	1384
*SECOND TEST (MEGOHMS)	1387
REMAIN WITHIN SPECIFIED TOLERANCE.	1388
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1371
PER MIL-STD-202, METHOD 302.	1511

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1380	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.
6359	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1824	THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE VALUE(S) LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE.
1384	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1384 MEGOHM(S) AT THE FIRST TEST TEMPERATURE.
1387	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1387 MEGOHM(S) AT THE SECOND TEST TEMPERATURE.
1388	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1371	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.
1511	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 302 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 302. (CONT)	
*CONDITION (SELECT ONE)	
TEST CONDITION (LETTER)	1378
TEST VOLTAGE (VOLTS, DC)	1373
ELECTRIFICATION TIME (SELECT ONE)	
(SECONDS)	1376
(MINUTES)	1825
MAXIMUM MEASUREMENT ERROR AT REQUIRED VALUE (PERCENT)	1377
POINTS OF APPLICATION OF TEST VOLTAGE:	
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	1498
BETWEEN MUTUALLY INSULATED PARTS.	1522
SPECIAL PREPARATIONS OR CONDITIONS PER DOCUMENT (DOC DES)	1520
FIRST TEST TEMPERATURE (DEGREES CELSIUS)	1372
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	1381
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1383

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1378 TEST CONDITION LETTER 1378 SHALL APPLY.

1373 TEST POTENTIAL SHALL BE 1373 VOLTS, DC.

1376 ELECTRIFICATION DURATION SHALL BE 1376 SECOND(S).

1825 ELECTRIFICATION DURATION SHALL BE 1825 MINUTE(S).

1377 THE MEASUREMENT ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1377 PERCENT.

POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:

1498 BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.

1522 BETWEEN MUTUALLY INSULATED PARTS.

1520 SPECIAL PREPARATIONS OR CONDITIONS SHALL BE IN ACCORDANCE WITH 1520.

1372 FIRST TEST TEMPERATURE SHALL BE 1372 DEGREES CELSIUS.

1381 SECOND TEST TEMPERATURE SHALL BE 1381 DEGREES CELSIUS.

1383 TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1383 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	1400
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	1396
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1394
MAXIMUM CAPACITANCE CHANGE (PERCENT)	2071
MAXIMUM DC LEAKAGE AFTER DRYING (MILLIAMPERES)	1779
MAXIMUM DISSIPATION FACTOR (PERCENT)	2072
PER ELECTRICAL CHARACTERISTICS TABLE.	1909
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	1432
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	1406

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1400	MOISTURE RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1400.
1396	MOISTURE RESISTANCE. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
1394	THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING OR INSULATION BREAKDOWN, WHEN DIELECTRIC WITHSTANDING VOLTAGE IS APPLIED.
2071	THE CHANGE IN CAPACITANCE SHALL BE NOT GREATER THAN 2071 PERCENT.
1779	THE DC LEAKAGE SHALL BE NOT GREATER THAN 1779 MILLIAMPERE(S) AFTER DRYING.
2072	THE DISSIPATION FACTOR SHALL BE NOT GREATER THAN 2072 PERCENT.
1909	THE ITEM(S) SHALL MEET THE REQUIREMENT(S) LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE AFTER THE TEST.
1432	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1432 MEGOHM(S) AT HIGH HUMIDITY.
1406	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1406 MEGOHM(S) AFTER DRYING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1391
PER MIL-STD-202, METHOD 106.	1397
POLARIZING VOLTAGE (VOLTS, DC)	1395
LOADING VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4981
(VOLTS, AC)	4980
PERCENT OF SAMPLE SUBJECTED TO POLARIZING VOLTAGE (PERCENT)	4991
STEP 7A NOT APPLICABLE.	4985
STEP 7B NOT APPLICABLE.	4986
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	4983
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	4984
OPERATION IN OIL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1978

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1391 MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3391.

1397 MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 106 OF MIL-STD-202.

1395 POLARIZING VOLTAGE SHALL BE 1395 VOLTS, DC.

4981 LOADING VOLTAGE SHALL BE 4981 VOLTS, DC.

4980 LOADING VOLTAGE SHALL BE 4980 VOLTS, AC.

4991 4991 PERCENT OF THE SAMPLE SHALL BE SUBJECTED TO THE POLARIZING VOLTAGE.

4985 STEP 7A OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.

4986 STEP 7B OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.

4983 PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.

4984 PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.

1978 OPERATION IN OIL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OPERATION IN OIL (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	1943
NO DEGRADATION OF PERFORMANCE.	1972
NO EVIDENCE OF PHYSICAL DAMAGE,	1977
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1976
AS FOLLOWS:	1847
OIL (DOC DES)	1965
OIL (CLASS)	1966
TEST TEMPERATURE (DEGREES CELSIUS)	1967
AMBIENT PRESSURE EQUIVALENT (SELECT ONE)	
(FEET)	1969
(METERS)	1953
VACUUM PRESSURE (KILOPASCALS)	1970
VACUUM PRESSURE DURATION (HOURS)	1971

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1943	OPERATION IN OIL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1972	THERE SHALL BE NO DEGRADATION OF PERFORMANCE.
1977	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1976	OPERATION IN OIL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1976,
1847	OPERATION IN OIL. TESTING SHALL BE PERFORMED AS FOLLOWS:
1965	THE OIL SHALL BE IN ACCORDANCE WITH 1965.
1966	THE OIL SHALL BE CLASS 1966.
1967	THE TEST TEMPERATURE OF THE OIL SHALL BE 1967 DEGREES CELSIUS.
1969	THE AMBIENT PRESSURE SHALL BE EQUIVALENT TO 1969 FEET OF ALTITUDE.
1953	THE AMBIENT PRESSURE SHALL BE EQUIVALENT TO 1953 METERS OF ALTITUDE.
1970	THE TEST VACUUM SHALL BE 1970 KILOPASCAL(S).
1971	THE TEST VACUUM SHALL BE APPLIED FOR 1971 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OPERATION IN OIL (CONT)	
AS FOLLOWS: (CONT)	
POSITIVE PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	1973
POSITIVE PRESSURE DURATION (HOURS)	2002
(KILOPASCALS)	1951
POSITIVE PRESSURE DURATION (HOURS)	1974
TEST VOLTAGE (PERCENT OF RATED)	1975
OVERLOAD/VOLTAGE DROP	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2174
AS FOLLOWS:	2185
NO EVIDENCE OF PHYSICAL DAMAGE.	2175
MAXIMUM CAPACITANCE CHANGE (PERCENT)	2176
MAXIMUM DC LEAKAGE (MILLIAMPERES)	2177

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1973	A POSITIVE TEST PRESSURE OF 1973 POUNDS PER SQUARE INCH SHALL BE APPLIED.
2002	THE POSITIVE TEST PRESSURE SHALL BE APPLIED FOR 2002 HOUR(S).
1951	A POSITIVE TEST PRESSURE OF 1951 KILOPASCAL(S) SHALL BE APPLIED.
1974	THE POSITIVE TEST PRESSURE SHALL BE APPLIED FOR 1974 HOUR(S).
1975	THE TEST VOLTAGE SHALL BE 1975 PERCENT OF THE RATED VOLTAGE.
2174	OVERLOAD/VOLTAGE DROP. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2174.
2185	OVERLOAD/VOLTAGE DROP. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2175	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2176	THE CHANGE IN CAPACITANCE SHALL BE NOT GREATER THAN 2176 PERCENT.
2177	THE DC LEAKAGE SHALL BE NOT GREATER THAN 2177 MILLIAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OVERLOAD/VOLTAGE DROP (CONT)	
AS FOLLOWS: (CONT)	
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2178
MAXIMUM DISSIPATION FACTOR (PERCENT)	2179
MAXIMUM POWER FACTOR (NUMBER)	2180
MAXIMUM INSERTION LOSS (DECIBELS)	2181
MAXIMUM VOLTAGE DROP (VOLTS)	2190
PER ELECTRICAL CHARACTERISTICS TABLE.	2182
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2184
AS FOLLOWS:	2191
ELECTRICAL STRESS (SELECT ONE)	
CURRENT (AMPERES)	2186
CURRENT (PERCENT OF RATED)	2187
TEST TEMPERATURE (DEGREES CELSIUS)	2188
TEST DURATION (MINUTES)	2189

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2178	THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 2178 MEGOHM(S).
2179	THE DISSIPATION FACTOR SHALL BE NOT GREATER THAN 2179 PERCENT.
2180	THE POWER FACTOR SHALL BE NOT GREATER THAN 2180.
2181	THE INSERTION LOSS SHALL BE NOT GREATER THAN 2181 DECIBEL(S).
2190	THE VOLTAGE DROP SHALL BE NOT GREATER THAN 2190 VOLT(S).
2182	THE ITEM(S) SHALL MEET THE REQUIREMENT(S) LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE AFTER THE TEST.
2184	OVERLOAD/VOLTAGE DROP. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2184.
2191	OVERLOAD/VOLTAGE DROP. TESTING SHALL BE PERFORMED AS FOLLOWS:
2186	THE TEST CURRENT SHALL BE 2186 AMPERE(S).
2187	THE TEST CURRENT SHALL BE 2187 PERCENT OF RATED CURRENT.
2188	THE TEST TEMPERATURE SHALL BE 2388 DEGREES CELSIUS.
2189	THE TEST DURATION SHALL BE 2189 MINUTE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PERMEABILITY, MAGNETIC	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1714
MAXIMUM INITIAL RELATIVE PERMEABILITY (NUMBER)	1946
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1716
TEST PER MIL-I-17214.	1717
AS FOLLOWS:	1949
TEST FREQUENCY (HERTZ)	1948
FIELD STRENGTH (AMPERE/METER)	1718
FIELD DENSITY (TELSA)	1947
POWER FACTOR	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1668
PER ELECTRICAL CHARACTERISTICS TABLE.	1666
*NOTE: SEE APPENDIX A, TABLE III.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1714	PERMEABILITY, MAGNETIC. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1714.
1946	PERMEABILITY, MAGNETIC. THE INITIAL RELATIVE PERMEABILITY SHALL BE NOT GREATER THAN 1946 WHEN COMPARED TO AIR EQUAL TO 1.0.
1716	PERMEABILITY, MAGNETIC. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1716.
1717	PERMEABILITY, MAGNETIC, TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-I-17214.
1949	PERMEABILITY, MAGNETIC. TESTING SHALL BE PERFORMED AS FOLLOWS:
1948	THE TEST FREQUENCY SHALL BE 3948 HERTZ.
1718	THE FIELD STRENGTH SHALL BE 1718 AMPERE/METER.
1947	THE FIELD DENSITY SHALL BE 1947 TELSA.
1668	POWER FACTOR. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1668.
1666	POWER FACTOR. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE VALUE(S) LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
POWER FACTOR (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1672
AS FOLLOWS:	1675
TEST FREQUENCY (HERTZ)	1598
TEST TEMPERATURE (DEGREES CELSIUS)	1597
MAXIMUM TEST VOLTAGE (VOLTS, RMS)	1599
POLARIZING VOLTAGE (VOLTS)	1602
MEASUREMENT ACCURACY WITHIN (PERCENT)	1600
PRECONDITIONING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1698
NO EVIDENCE OF PHYSICAL DAMAGE.	1699
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1700

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1672	POWER FACTOR, TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1672.
1675	POWER FACTOR. TESTING SHALL BE PERFORMED AS FOLLOWS:
1598	TESTING SHALL BE PERFORMED AT A FREQUENCY OF 1598 HERTZ.
1597	THE TEST TEMPERATURE SHALL BE 1597 DEGREES CELSIUS.
1599	THE TEST VOLTAGE SHALL BE NOT GREATER THAN 1599 VOLT(S) RMS.
1602	THE POLARIZING VOLTAGE SHALL BE 1602 VOLT(S) DC.
1600	THE EQUIPMENT MEASURING ACCURACY SHALL BE WITHIN 1600 PERCENT.
1698	PRECONDITIONING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1698.
1699	PRECONDITIONING. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1700	PRECONDITIONING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1700.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PRECONDITIONING (CONT)	
TEST METHODS (CONT)	
EXPOSE TO A SATURATED STEAM ATMOSPHERE OF (POUNDS PER SQUARE INCH)	1667
DURATION OF EXPOSURE (MINUTES)	1701
EXPOSE TO A SATURATED STEAM ATMOSPHERE OF (KILOPASCALS)	1702
DURATION OF EXPOSURE (MINUTES)	1692
QUALITY FACTOR	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1665
PER ELECTRICAL CHARACTERISTICS TABLE,	1644
*NOTE: SEE APPENDIX A, TABLE III.	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1660
PER MIL-STD-202, METHOD 306.	1643
*TEST FREQUENCY (HERTZ)	1662
TOLERANCE (HERTZ)	1663

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1667	PRECONDITIONING. EXPOSE TO A SATURATED STEAM ATMOSPHERE OF 1667 POUNDS PER SQUARE INCH.
1701	DURATION OF EXPOSURE SHALL BE 1701 MINUTE(S).
1702	PRECONDITIONING. EXPOSE TO A SATURATED STEAM ATMOSPHERE OF 1702 KILOPASCAL(S).
1692	DURATION OF EXPOSURE SHALL BE 1692 MINUTE(S).
1665	QUALITY FACTOR. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1665.
1644	QUALITY FACTOR. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE VALUE(S) LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE.
1660	QUALITY FACTOR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1660.
1643	QUALITY FACTOR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 306 OF MIL-STD-202.
1662	THE TEST FREQUENCY SHALL BE 1662 HERTZ.
1663	THE TEST FREQUENCY TOLERANCE SHALL BE 1663 HERTZ-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RADIOGRAPHIC	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6291
NO INHOMOGENEITIES, FOREIGN PARTICLES, INCORRENT ALIGNMENT, DEFECTS	6371
*DISPOSITION OF NEGATIVES OR RECORDS (SELECT ONE)	
DELIVERED.	4857
NOT DELIVERED	4858
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6282
PER MIL-STD-202, METHOD 209.	4843

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6291	RADIOGRAPHIC. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6291.
6371	RADIOGRAPHIC. THE EXAMINATION OF THE RADIOGRAPHS OF THE ITEMS SHALL SHOW: NO INHOMOGENEITIES, NO FOREIGN PARTICLES WITHIN THE ENCLOSURE, ALL PARTS CORRECTLY ALIGNED WITH EACH OTHER, NO DEFECTIVE WORKMANSHIP DETAILS, OR ANY OTHER DEFECTS SPECIFIED HEREIN. MANUFACTURERS SHALL PROVIDE A MEANS OF IDENTIFYING ITEMS ON THE NEGATIVES (OR NONFILM RECORDS, IF APPLICABLE).
4857	NEGATIVES (OR NONFILM RECORDS, IF APPLICABLE) SHALL BE DELIVERED WITH EACH SHIPMENT OF ITEMS.
4858	NEGATIVES (OR NONFILM RECORDS, IF APPLICABLE) SHALL BE MADE AVAILABLE FOR EXAMINATION UPON REQUEST.
6282	RADIOGRAPHIC. RADIOGRAPHIC INSPECTION SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6282.
4843	RADIOGRAPHIC. RADIOGRAPHIC INSPECTION SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 209 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RADIOGRAPHIC (CONT)	
PER MIL-STD-202, METHOD 2090 (CONT)	
SOURCE-OBJECT DISTANCE (SELECT ONE)	
(METERS)	6286
(INCHES)	6285
VIEWING EQUIPMENT (IDENTIFY) ____	6287
MAGNIFICATION (X-POWER)	6288
DEFECTS SOUGHT (IDENTIFY) ____	6289
NONFILM TECHNIQUES ALLOWED.	6284
PENETRAMETER WIRE SIZE (SELECT ONE)	
(AWG)	6283
(MILLIMETERS)	5297

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6286	THE SOURCE-OBJECT DISTANCE (THE DISTANCE FROM THE FOCAL SPOT OF THE X-RAY TUBE TO THE OBJECT BEING RADIOGRAPHED) SHALL BE 6286 METER(S),
6285	THE SOURCE-OBJECT DISTANCE (THE DISTANCE FROM THE FOCAL SPOT OF THE X-RAY TUBE TO THE OBJECT BEING RADIOGRAPHED) SHALL BE 6285 INCHES.
6287	THE VIEWING EQUIPMENT SHALL BE 6287.
6288	THE IMAGES SHALL BE VIEWED AT 6288 X-POWER MAGNIFICATION,
6289	THE DEFECTS TO BE SOUGHT SHALL BE 6289.
6284	NONFILM TECHNIQUES MAY BE USED, IF DESIRED, RECORDS SHALL BE MAINTAINED, FOR EXAMINATION OR DELIVERY, AS SPECIFIED.
6283	TO FURTHER INSURE ADEQUATE QUALITY, A RADIOGRAPH OF THE PENETRAMETER SHALL BE INCLUDED ON EACH RADIOGRAPH FILM. THE PENETRAMETER SHALL BE MADE FROM A SAMPLE ITEM OF THE SAME TYPE AS THE ITEM BEING INSPECTED (RADIOGRAPHED), THE PENETRAMETER SHOULD UTILIZE AN AWG SIZE 6283 COPPER WIRE ON THE SIDE OF THE ITEM FARTHEST' FROM THE X-RAY FILM.
5297	TO FURTHER INSURE ADEQUATE QUALITY, A RADIOGRAPH OF THE PENETRAMETER SHALL BE INCLUDED ON EACH RADIOGRAPH FILM. THE PENETRAMETER SHALL BE MADE FROM A SAMPLE ITEM OF THE SAME TYPE AS THE ITEM BEING INSPECTED (RADIOGRAPHED), THE PENETRAMETER SHOULD UTILIZE 5297 MILLIMETER(S) DIAMETER WIRE ON THE SIDE OF THE ITEM FARTHEST FROM THE X-RAY FILM.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6929
NO EVIDENCE OF PHYSICAL DAMAGE.	6930
MAXIMUM CAPACITANCE CHANGE (PERCENT)	1707
MAXIMUM DC LEAKAGE (MILLIAMPERES)	1803
MINIMUM INSULATION RESISTANCE (MEGOHMS)	1800
MAXIMUM DISSIPATION FACTOR (PERCENT)	1709
MAXIMUM POWER FACTOR (NUMBER)	1801
MAXIMUM INSERTION LOSS (DECIBELS)	3802
PER ELECTRICAL CHARACTERISTICS TABLE.	1706

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6929	RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6929.
6930	RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING? STABILIZATION, LOAD LIFE, OVERLOAD). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1707	THE CHANGE IN CAPACITANCE SHALL BE NOT GREATER THAN 1707 PERCENT.
1803	THE DC LEAKAGE SHALL BE NOT GREATER THAN 1803 MILLIAMPERE(S).
1800	THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 1800 MEGOHM(S).
1709	THE DISSIPATION FACTOR SHALL BE NOT GREATER THAN 1709 PERCENT.
1801	THE POWER FACTOR SHALL BE NOT GREATER THAN 1801.
1802	THE INSERTION LOSS SHALL BE NOT GREATER THAN 1802 DECIBEL(S).
1706	THE ITEM(S) SHALL MEET THE REQUIREMENT(S) LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE AFTER THE TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD) (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6696
PER MIL-STD-202, METHOD 108.	6697
*DURATION (SELECT ONE)	
TEST CONDITION (LETTER)	6698
(HOURS)	6699
*TEST POTENTIAL (SELECT ONE)	
VOLTAGE (SELECT ONE)	
(VOLTS, AC)	6706
(VOLTS, DC)	6707
VOLTAGE (PERCENT OF RATED)	1684
*TEST TEMPERATURE (DEGREES CELSIUS)	6700
PLUS TOLERANCE (DEGREES CELSIUS)	1681
MINUS TOLERANCE (DEGREES CELSIUS)	1682

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH

6696 RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6696.

6697 RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 108 OF MIL-STD-202.

6698 TEST CONDITION LETTER 6698 SHALL APPLY.

6699 DURATION OF THE TEST SHALL BE 6699 HOUR(S).

6706 TEST POTENTIAL SHALL BE 6706 VOLTS, AC.

6707 TEST POTENTIAL SHALL BE 6707 VOLTS, DC.

1684 THE TEST VOLTAGE SHALL BE 1684 PERCENT OF THE RATED VOLTAGE.

6700 TEST TEMPERATURE SHALL BE 6700 DEGREES CELSIUS.

1681 TEST TEMPERATURE TOLERANCE SHALL BE PLUS 1681 DEGREES CELSIUS.

1682 TEST TEMPERATURE TOLERANCE SHALL BE MINUS 1682 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD) (CONT)	
PER MIL-STD-202, METHOD 108. (CONT)	
MAXIMUM SURGE VOLTAGE (PERCENT OF RATED)	1689
MAXIMUM SURGE CURRENT (AMPERES)	1690
STILL AIR REQUIRED.	6923
RESISTANCE TO SOLDERING HEAT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4700
NO EVIDENCE OF PHYSICAL DAMAGE.	4701
MAXIMUM CAPACITANCE CHANGE (PERCENT)	2076
MINIMUM INSULATION RESISTANCE (MEGOHMS)	4706
MAXIMUM DISSIPATION FACTOR (PERCENT)	1815
PER ELECTRICAL CHARACTERISTICS TABLE.	1816
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4689

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1689	THE SURGE VOLTAGE SHALL BE NOT GREATER THAN 1689 PERCENT OF RATED VOLTAGE.
1690	THE SURGE CURRENT SHALL BE NOT GREATER THAN 1690 AMPERE(S).
6923	TEST CHAMBER SHALL HAVE STILL AIR,
4700	RESISTANCE TO SOLDERING HEAT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4700.
4701	RESISTANCE TO SOLDERING HEAT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2076	THE CHANGE IN CAPACITANCE SHALL BE NOT GREATER THAN 2076 PERCENT.
4706	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 4706 MEGOHMS.
1815	THE DISSIPATION FACTOR SHALL BE NOT GREATER THAN 1815 PERCENT.
1816	THE ITEM(S) SHALL MEET THE REQUIREMENT(S) LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE AFTER THE TEST.
4689	RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4689.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO SOLDERING HEAT (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 210.	4698
*TEST CONDITION (LETTER)	4691
NUMBER OF TERMINATIONS TESTED (QUANTITY)	4694
DEPTH OF IMMERSION IN SOLDER (SELECT ONE)	
(INCHES)	4692
(MILLIMETERS)	4669
IMMERSION IN FLUX PERMITTED.	4671
SPECIAL PREPARATIONS PERMITTED.	4989
COOLING TIME (MINUTES)	4695
RESISTANCE TO SOLVENTS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4834
NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.	4830
NO DETERIORATION OF MATERIAL OR FINISH.	1785
MARKING SHALL REMAIN LEGIBLE.	4836

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4698 RESISTANCE TO SOLDERING HEAT, TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 210 OF MIL-STD-202.

4691 TEST CONDITION LETTER 4691 SHALL APPLY.

4694 4694 TERMINATION(S) PER UNIT SHALL BE TESTED.

4692 DEPTH OF IMMERSION IN SOLDER SHALL BE 4692 INCH(S).

4669 DEPTH OF IMMERSION IN SOLDER SHALL BE 4669 MILLIMETER(S).

4671 IMMERSION OF TERMINATION IN FLUX SHALL BE PERMITTED.

4989 SPECIAL PREPARATION SHALL BE PERMITTED.

4695 COOLING TIME SHALL BE 4695 MINUTES PRIOR TO FINAL EXAMINATION AND MEASUREMENTS,

4834 RESISTANCE TO SOLVENTS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4834.

4830 RESISTANCE TO SOLVENTS. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.

1785 THERE SHALL BE NO DETERIORATION OF MATERIAL OR FINISH.

4836 MARKING SHALL REMAIN LEGIBLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO SOLVENTS (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4829
PER MIL-STD-202, METHOD 215.	4839
SOLVENTS TO BE ADDED (NAME)	4838
SOLVENTS TO BE DELETED (SUBPARAGRAPH LETTER)	4835
BRUSH MARKING AREA,	4831
ALL OF SPECIMEN TO BE BRUSHED.	6279
SALT SPRAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4878
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE.	4782
PER ELECTRICAL CHARACTERISTICS TABLE.	1787

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4829	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4829.
4839	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 215 OF MIL-STD-202. THE SPECIMENS SHALL BE DIVIDED INTO GROUPS OF EQUAL NUMBER TO THE EXTENT POSSIBLE.
4838	IN ADDITION TO THE SPECIFIED SOLVENT(S), 4838 SHALL ALSO BE USED.
4835	BRUSHING SHALL BE PERFORMED WITH THE SOLVENTS IN ACCORDANCE WITH METHOD 215 OF MIL-STD-202, EXCEPT THAT SOLUTION(S) 4835 SHALL NOT BE USED.
4831	THE MARKING AREA SHALL BE BRUSHED.
6279	THE ENTIRE SURFACE SHALL BE BRUSHED.
4878	SALT SPRAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4878.
4782	SALT SPRAY, THERE SHALL BE NO EVIDENCE OF CORROSION PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
1787	THE ITEM(S) SHALL MEET THE REQUIREMENT(S) LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE AFTER THE TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT SPRAY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4770
PER MIL-STD-202, METHOD 101.	4771
*EXPOSURE DURATION (SELECT ONE)	
TEST CONDITION (LETTER)	4772
EXPOSURE PERIOD (HOURS)	4783
MOUNTING (SELECT ONE)	
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4773
MOUNTING SHALL BE BY NORMAL METHOD.	4765
MOUNTING SHALL BE BY ANY SUITABLE METHOD.	4766
SAND AND DUST	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4958
NO EVIDENCE OF DUST PENETRATION-	4959
PER ELECTRICAL CHARACTERISTICS TABLE.	1799

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4770	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4770.
4771	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 101 OF MIL-STD-202.
4772	TEST CONDITION LETTER 4772 SHALL APPLY.
4783	DURATION OF TEST SHALL BE 4783 HOUR(S).
4773	MOUNTING SHALL BE IN ACCORDANCE WITH 4773.
4765	MOUNTING SHALL BE BY THE NORMAL METHOD,
4766	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4958	SAND AND DUST. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4958.
4959	SAND AND DUST. THERE SHALL BE NO EVIDENCE OF DUST PENETRATION.
1799	THE ITEM(S) SHALL MEET THE REQUIREMENT(S) LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE AFTER THE TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SAND AND DUST (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4952
PER MIL-STD-202, METHOD 110.	4960
TEST SPECIMENS SHALL BE OPERATED DURING TEST STEPS (NUMBER)	4872
*DURATION OF OPERATION (SELECT ONE)	
(HOURS)	6299
(MINUTES)	6298
SECOND 6-HOUR TEST REQUIRED IMMEDIATELY FOLLOWING TEMPERATURE STABILIZATION IN STEP 2.	4956

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4952	SAND AND DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4952.
4960	SAND AND DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 11O OF MIL-STD-202.
4872	ITEM(S) SHALL BE OPERATED DURING STEP(S) 4872.
6299	DURATION OF OPERATION SHALL BE 6299 HOUR(S).
6298	DURATION OF OPERATION SHALL BE 6298 MINUTE(S).
4956	THE SECOND 6-HOUR TEST SHALL BE PERFORMED IMMEDIATELY AFTER REACHING TEMPERATURE STABILIZATION IN STEP 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4745
AS FOLLOWS:	6370
SPECIFIED TEST METHOD SENSITIVITY,	4746
NO BUBBLES INDICATIVE OF LEAKAGE.	4748
PER ELECTRICAL CHARACTERISTICS TABLE.	1780
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4734
PER MIL-STD-202, METHOD 112.	4732
*TEST CONDITION LETTER	
LETTER A.	4737
LIQUID FOR BATH (NAME)	4738
MINIMUM BATH TEMPERATURE (DEGREES CELSIUS)	4739
LETTER B.	6320

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH
4745	SEAL.	THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4745.
6370	SEAL.	THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
4746		THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE SPECIFIED TEST METHOD SENSITIVITY.
4748		THERE SHALL BE NO BUBBLES INDICATIVE OF LEAKAGE.
1780		THE ITEM(S) SHALL MEET THE REQUIREMENT(S) LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE AFTER THE TEST.
4734	SEAL.	TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4734.
4732	SEAL.	TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 112 OF MIL-STD-202.
4737		TEST CONDITION LETTER A SHALL APPLY.
4738		LIQUID FOR BUBBLE BATH SHALL BE 4738.
4739		TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT, LESS THAN 4739 DEGREES CELSIUS.
6320		TEST CONDITION LETTER B SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
LETTER B. (CONT)	
LIQUID FOR BATH (NAME)	6321
MINIMUM BATH TEMPERATURE (DEGREES CELSIUS)	6322
LETTER C.	6323
*LEAK RATE SENSITIVITY (ATM CC/SEC)	4743
*TEST PROCEDURE (SELECT ONE)	
TEST PROCEDURE I.	4740
VACUUM PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	4742
(KILOPASCALS)	4736
TEST PROCEDURE II.	6324
BACKFILL PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	6325
(KILOPASCALS)	6326
NUMBER OF PRESSURE CYCLES (QUANTITY)	4749

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6321	LIQUID FOR BUBBLE TEST BATH SHALL BE 6321.
6322	TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 6322 DEGREES CELSIUS.
6323	TEST CONDITION LETTER C SHALL APPLY.
4741	LEAK SENSITIVITY RATE SHALL BE 4741 ATM CC/SEC.
4740	PROCEDURE NUMBER I SHALL APPLY.
4742	VACUUM PRESSURE SHALL BE 4742 POUNDS PER SQUARE INCH.
4736	VACUUM PRESSURE SHALL BE 4736 KILOPASCALS.
6324	PROCEDURE NUMBER II SHALL APPLY.
6325	BACKFILL PRESSURE SHALL BE 6325 POUNDS PER SQUARE INCH.
6326	BACKFILL PRESSURE SHALL BE 6326 KILOPASCALS.
4749	THERE SHALL BE 4749 PRESSURE CYCLE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
LETTER C. (CONT)	
*TEST PROCEDURE III.	6328
GROSS LEAK TEST CONDITION (LETTER)	4750
TEST PROCEDURE IV.	6329
CHAMBER PRESSURE (SELECT ONE)	
(TORR)	4751
(KILOPASCALS)	4735
DURATION OF REDUCED PRESSURE (MINUTES)	4752
GROSS LEAK TEST CONDITION (LETTER)	6330
LETTER D.	6331
ANY SUITABLE MOUNTING FIXTURE.	4743
LETTER E.	6332
ANY SUITABLE MOUNTING FIXTURE.	6333
SHOCK, HIGH IMPACT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1494
NO EVIDENCE OF PHYSICAL DAMAGE.	1495

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH
6328	PROCEDURE NUMBER III SHALL APPLY.	
4750	GROSS LEAK TEST CONDITION LETTER 4750 SHALL APPLY.	
6329	PROCEDURE NUMBER IV SHALL APPLY.	
4751	CHAMBER PRESSURE SHALL BE 4751 TORR.	
4735	CHAMBER PRESSURE SHALL BE 4735 KILOPASCALS.	
4752	DURATION AT LOW PRESSURE SHALL BE 4752 MINUTE.	
6330	GROSS LEAK TEST CONDITION LETTER 6330 SHALL APPLY.	
6331	TEST CONDITION LETTER D SHALL APPLY.	
4743	MOUNTING SHALL BE BY ANY SUITABLE METHOD.	
6332	TEST CONDITION LETTER E SHALL APPLY.	
6333	MOUNTING SHALL BE BY ANY SUITABLE METHOD.	
1494	SHOCK, HIGH IMPACT.	THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1494.
1495	SHOCK, HIGH IMPACT.	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, HIGH IMPACT (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
MAXIMUM CAPACITANCE CHANGE (PERCENT)	2140
MAXIMUM DC LEAKAGE (MILLIAMPERES)	2141
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2142
MAXIMUM DISSIPATION FACTOR (PERCENT)	2143
NO OPEN, NO SHORT CIRCUITS.	2144
PER ELECTRICAL CHARACTERISTICS TABLE.	1819
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1486
PER MIL-STD-202, METHOD 207.	1482
*MOUNTING FIXTURE (SELECT ONE)	
FIGURE NUMBER FROM METHOD 207 OF MIL-STD-202 (NUMBER)	1488
ANY SUITABLE MOUNTING FIXTURE.	1478
MOUNTING FIXTURE PER DOCUMENT (DOC DES)	146 8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2140	THE CHANGE IN CAPACITANCE SHALL BE NOT GREATER THAN 2140 PERCENT.
2141	THE DC LEAKAGE SHALL BE NOT GREATER THAN 2141 MILLIAMPERE(S).
2142	THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 2142 MEGOHM(S)
2143	THE DISSIPATION FACTOR SHALL BE NOT GREATER THAN 2143 PERCENT
2144	THERE SHALL BE NO OPEN OR SHORT CIRCUITS DURING THE TEST.
1819	THE ITEM(S) SHALL MEET THE REQUIREMENT(S) LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE.
1486	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1486.
1482	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 207 OF MIL-STD-2020
1488	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH FIGURE 1488 OF METHOD 207 OF MIL-STD-202.
1478	THE MOUNTING FIXTURE SHALL BE ANY SUITABLE MOUNTING FIXTURE.
1468	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH 1468.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, SPECIFIED PULSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1508
NO EVIDENCE OF PHYSICAL DAMAGE.	1509
MAXIMUM CAPACITANCE CHANGE (PERCENT)	2145
MAXIMUM DC LEAKAGE (MILLIAMPERES)	2146
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2147
MAXIMUM DISSIPATION FACTOR (PERCENT)	2148
PER ELECTRICAL CHARACTERISTICS TABLE.	1823
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1502
PER MIL-STD-202, METHOD 213.	1500
*TEST CONDITION (LETTER)	1504

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1508	SHOCK, SPECIFIED PULSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1508.
1509	SHOCK, SPECIFIED PULSE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2145	THE CHANGE IN CAPACITANCE SHALL BE NOT GREATER THAN 2145 PERCENT.
2146	THE DC LEAKAGE SHALL BE NOT GREATER THAN 2146 MILLIAMPERE(S).
2147	THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 2147 MEGOHM(S).
2148	THE DISSIPATION FACTOR SHALL BE NOT GREATER THAN 2148 PERCENT.
1823	THE ITEM(S) SHALL MEET THE REQUIREMENT(S) LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE AFTER THE TEST.
1502	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1502.
1500	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 213 OF MIL-STD-202.
1504	TEST CONDITION LETTER 1504 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, SPECIFIED PULSE (CONT)	
PER MIL-STD-202, METHOD 213. (CONT)	
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	4686
NORMAL MOUNTING MEANS.	4685
MOUNT PER DOCUMENT (DOC DES)	4684
SOLDERABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4674
NO EVIDENCE OF PHYSICAL DAMAGE.	4675
MEET EVALUATION CRITERIA SPECIFIED IN MIL-STD-202, METHOD 208.	4672
PER ELECTRICAL CHARACTERISTICS TABLE.	L908
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4662
PER MIL-STD-202, METHOD 208.	4683

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4686	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4685	MOUNTING SHALL BE BY THE NORMAL METHOD.
4684	MOUNTING SHALL BE IN ACCORDANCE WITH 4684.
4674	SOLDERABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT ~~4674.~~
4675	SOLDERABILITY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4672	THE RESULTS OF THE SOLDERABILITY TEST SHALL BE IN ACCORDANCE WITH THE ACCEPTANCE CRITERIA OF METHOD 208 OF MIL-STD-202.
1908	THE ITEM(S) SHALL MEET THE REQUIREMENT(S) LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE AFTER THE TEST.
4662	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT ~~4662.~~
4683	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 208 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SOLDERABILITY (CONT)	
PER MIL-STD-202, METHOD 208. (CONT)	
NUMBER OF TERMINALS TO BE TESTED (QUANTITY)	4666
DEPTH OF IMMERSION (SELECT ONE)	
(INCHES)	4667
(MILLIMETERS)	4663
DISTANCE WRAP WIRE APPLIED FROM BODY (SELECT ONE)	
(INCHES)	4664
(MILLIMETERS)	4665
STABILITY AT LOW AND HIGH TEMPERATURES	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2299

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4666	4666 TERMINATION(S) PER UNIT SHALL BE TESTED.
4667	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4667 INCH(S).
4663	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4663 MILLIMETER(S).
4664	THE WRAP WIRE SHALL BE 4664 INCH(S) FROM THE BODY.
4665	THE WRAP WIRE SHALL BE 4665 MILLIMETER(S) FROM THE BODY.
2299	STABILITY AT LOW AND HIGH TEMPERATURES. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2299.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STABILITY AT LOW AND HIGH TEMPERATURES (CONT)	
REQUIREMENTS (CONT)	
PER STABILITY MEASUREMENTS/TEST TABLE.	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

STABILITY AT LOW AND HIGH TEMPERARURES. THE DEVICE(S) SHALL MEET THE REQUIREMENT(S) LISTED IN THE STABILITY MEASUREMENTS/ TEST TABLE.

STABILITY MEASUREMENTS/TEST TABLE

MEASUREMENT OR TEST	TEMP DEG C LOW	TEMP DEG C HIGH	STBLN TIME HOUR	STBLN TIME MIN	VOLT	SEE NOTE	MAX CHNG	MIN	MAX	UNIT OR PCT
2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311
2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323
2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335
2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347
2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359
2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371
2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383
2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395
2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407
2409	2410	2411	2412	2413	2414	2415	2416	2417	2438	2419
2421	2422	2423	2424	2425	2426	2427	2428	2429	2430	2431
2433	2434	2435	2436	2437	2438	2439	2440	2441	2442	2443
2445	2446	2447	2448	2449	2450	2451	2452	2453	2454	2455
2457	2458	2459	2460	2461	2462	2463	2464	2465	2466	2467
2469	2470	2471	2472	2473	2474	2475	2476	2477	2478	2479
2481	2482	2483	2484	2485	2486	2487	2488	2489	2490	2491
2493	2494	2495	2496	2497	2498	2499	2500	2501	2502	2503
2505	2506	2507	2508	2509	2510	2511	2512	2513	2514	2515
2517	2518	2519	2520	2521	2522	2523	2524	2525	2526	2527
2529	2530	2531	2532	2533	2534	2535	2536	2537	2538	2539

NOTE A – INITIAL MEASUREMENT FOR CALCULATING CHANGE
NOTE B – CHANGE FROM INITIAL MEASUREMENT
NOTE C – CHANGE FROM PREVIOUS MEASUREMENT
NOTE D – PER THE REQUIREMENTS SPECIFIED HEREIN
NOTE E – PER THE BASE DOCUMENT

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STABILITY AT LOW AND HIGH TEMPERATURES (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2293
TEST PER STABILITY MEASUREMENTS/TEST TABLE.	2294
TEMPERATURE COEFFICIENT/TEMPERATURE CHARACTERISTIC/ VOLTAGE TEMPERATURE LIMITS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1703
PER ELECTRICAL CHARACTERISTICS TABLE.	2295

*NOTE: SEE APPENDIX A, TABLE III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2293	STABILITY AT LOW AND HIGH TEMPERATURES. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2293.
2294	STABILITY AT LOW AND HIGH TEMPERATURES. TESTING SHALL BE PERFORMED AT THE CONDITIONS SPECIFIED IN THE STABILITY MEASUREMENTS/TEST TABLE. THE DEVICE SHALL REACH TEMPERATURE STABILIZATIONS AS DETERMINED BY SUCCESSIVE MEASUREMENTS WITHOUT PARAMETER CHANGE, BEFORE RECORDING VALUES FOR DETERMINATION OF PARAMETER LIMITS OR BE MAINTAINED AT THE TEST CONDITIONS FOR THE TIME LISTED IN THE TABLE, WHICHEVER IS LONGER.
1703	TEMPERATURE COEFFICIENT/TEMPERATURE CHARACTERISTIC/VOLTAGE TEMPERATURE LIMITS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1703.
2295	TEMPERATURE COEFFICIENT/TEMPERATURE CHARACTERISTIC/VOLTAGE TEMPERATURE LIMITS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE VALUE(S) LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE COEFFICIENT/TEMPERATURE CHARACTERISTIC/ VOLTAGE TEMPERATURE LIMITS (CONT)	
REQUIREMENTS (CONT)	
PER TEMPERATURE COEFFICIENT/TEMPERATURE CHARACTERISTIC/VOLTAGE TEMPERATURE LIMITS TABLE.	2200
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1710

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2200 TEMPERATURE COEFFICIENT/TEMPERATURE CHARACTERISTIC/VOLTAGE TEMPERATURE LIMITS. THERE SHALL BE NO INDICATION OF BREAKDOWN OR ARCING, NOR SHALL THERE BE ANY OPEN- OR SHORT-CIRCUITING, NOR ANY VISIBLE EVIDENCE OF MECHANICAL DAMAGE. THE CAPACITANCE CHANGE SHALL BE NOT GREATER THAN THE APPLICABLE VALUE SPECIFIED IN THE FOLLOWING TABLE. THE INITIAL PLUS 25 DEGREES CELSIUS CAPACITANCE VALUE SHALL BE USED FOR DETERMINATION OF CAPACITANCE CHANGE.

TEMPERATURE COEFFICIENT/TEMPERATURE CHARACTERISTIC TABLE

TEMPERATURE DEGREES CELSIUS			VOLTAGE		CAPACITANCE CHANGE LIMITS			
NOM	MINUS TOL	PLUS TOL	AC	DC	MINUS PCT	PLUS PCT	PPM/DEG C,MIN	PPM/DEG C,MA
2201	2202	2203	2204	2205	2206	2207	2208	2209
2210	2211	2212	2213	2214	2215	2216	2217	2218
2219	2220	2221	2222	2223	2224	2225	2226	2227
2228	2229	2230	2231	2232	2233	2234	2235	2236
2237	2238	2239	2240	2241	2242	2243	2244	2245
2246	2247	2248	2249	2250	2251	2252	2253	2254
2255	2256	2257	2258	2259	2260	2261	2262	2263
2264	2265	2266	2267	2268	2269	2270	2271	2272

1710 TEMPERATURE COEFFICIENT/TEMPERATURE CHARACTERISTIC/VOLTAGE TEMPERATURE LIMITS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1710.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE COEFFICIENT/TEMPERATURE CHARACTERISTIC/ VOLTAGE TEMPERATURE LIMITS (CONT)	
TEST METHODS (CONT)	
PER TEMPERATURE COEFFICIENT/TEMPERATURE CHARACTERISTIC/VOLTAGE TEMPERATURE LIMITS TABLE.	1712
TEMPERATURE, EXPOSURE, HIGH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1878
AS FOLLOWS:	1877
NO EVIDENCE OF PHYSICAL DAMAGE.	1888
MAXIMUM CAPACITANCE CHANGE (PERCENT)	1880
MAXIMUM DC LEAKAGE (MILLIAMPERES)	1885
MINIMUM INSULATION RESISTANCE (MEGOHMS)	1882

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1712	TEMPERATURE COEFFICIENT/TEMPERATURE CHARACTERISTIC/VOLTAGE TEMPERATURE LIMITS. THE CAPACITORS SHALL BE SUBJECTED TO THE TEMPERATURES IN THE ORDER SHOWN IN THE TEMPERATURE COEFFICIENT/ TEMPERATURE CHARACTERISTIC/VOLTAGE TEMPERATURE LIMITS TABLE . THE CAPACITANCE MEASUREMENT AT EACH TEMPERATURE SHALL BE RECORDED WHEN TWO SUCCESSIVE READINGS, TAKEN AT 5 MINUTE INTERVALS, INDICATE NO CHANGE IN CAPACITANCE. TESTS PERFORMED AT TEMPERATURES ABOVE 85 DEGREES CELSIUS MAY BE VOLTAGE DERATED WHERE APPLICABLE.
1878	TEMPERATURE? EXPOSURE, HIGH. THE REQUIREMENTS SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1878.
1877	TEMPERATURE, EXPOSURE, HIGH. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1888	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1880	THE CHANGE IN CAPACITANCE SHALL BE NOT GREATER THAN 1880 PERCENT.
1885	THE DC LEAKAGE SHALL BE NOT GREATER THAN 1885 MILLIAMPERE(S).
1882	THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 1882 MEGOHM(S)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, EXPOSURE, HIGH (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM DISSIPATION FACTOR (PERCENT)	1881
MAXIMUM POWER FACTOR (NUMBER)	1883
MAXIMUM INSERTION LOSS (DECIBELS)	1884
PER ELECTRICAL CHARACTERISTICS TABLE.	1886
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1869
AS FOLLOWS:	1876
TEST TEMPERATURE (DEGREES CELSIUS)	1870
TEST TEMPERATURE TOLERANCE	
PLUS (DEGREES CELSIUS)	1871
MINUS (DEGREES CELSIUS)	1872
TEST DURATION (HOURS)	1873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH
1881	THE DISSIPATION FACTOR SHALL BE NOT GREATER THAN 1881 PERCENT.	
1883	THE POWER FACTOR SHALL BE NOT GREATER THAN 1883.	
1884	THE INSERTION LOSS SHALL BE NOT GREATER THAN 1884 DECIBEL(S).	
1886	THE ITEM(S) SHALL MEET THE REQUIREMENT(S) LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE AFTER THE TEST.	
1869	TEMPERATURE, EXPOSURE, HIGH.	TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1869.
1876	TEMPERATURE, EXPOSURE, HIGH.	TESTING SHALL BE PERFORMED AS FOLLOWS:
1870	THE TEST TEMPERATURE SHALL BE 1870 DEGREES CELSIUS.	
1871	THE TEST TEMPERATURE PLUS TOLERANCE SHALL BE 1871 DEGREES CELSIUS.	
1872	THE TEST TEMPERATURE MINUS TOLERANCE SHALL BE 1872 DEGREES CELSIUS.	
1873	THE TEST DURATION SHALL BE 1873 HOUR(S).	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, EXPOSURE, LOW	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1858
AS FOLLOWS:	1866
NO EVIDENCE OF PHYSICAL DAMAGE.	1856
MAXIMUM CAPACITANCE CHANGE (PERCENT)	1859
MAXIMUM DC LEAKAGE (MILLIAMPERES)	1865
MINIMUM INSULATION RESISTANCE (MEGOHMS)	1862
MAXIMUM DISSIPATION FACTOR (PERCENT)	1861
MAXIMUM POWER FACTOR (NUMBER)	1863
MAXIMUM INSERTION LOSS (DECIBELS)	1864
PER ELECTRICAL CHARACTERISTICS TABLE.	1860
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1851
AS FOLLOWS:	1867

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1858	TEMPERATURE, EXPOSURE, LOW. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1858.
1866	TEMPERATURE, EXPOSURE, LOW. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1856	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1859	THE CHANGE IN CAPACITANCE SHALL BE NOT GREATER THAN 1859 PERCENT.
1865	THE DC LEAKAGE SHALL BE NOT GREATER THAN 1865 MILLIAMPERE(S).
1862	THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 1862 MEGOHM(S).
1861	THE DISSIPATION FACTOR SHALL BE NOT GREATER THAN 1861 PERCENT.
1863	THE POWER FACTOR SHALL BE NOT GREATER THAN 1863.
1864	THE INSERTION LOSS SHALL BE NOT GREATER THAN 1864 DECIBEL(S).
1860	THE ITEM(S) SHALL MEET THE REQUIREMENT(S) LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE AFTER THE TEST.
1851	TEMPERATURE, EXPOSURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1851.
1867	TEMPERATURE, EXPOSURE, LOW. TESTING SHALL BE PERFORMED AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE? EXPOSURET LOW (CONT)	
AS FOLLOWS: (CONT)	
TEST TEMPERATURE (DEGREES CELSIUS)	1852
TEST TEMPERATURE TOLERANCE	
PLUS (DEGREES CELSIUS)	1853
MINUS (DEGREES CELSIUS)	1854
TEST DURATION (HOURS)	1855
TEMPERATURE, OPERATION? LOW	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1842
AS FOLLOWS:	1837
NO EVIDENCE OF PHYSICAL DAMAGE.	1846
MAXIMUM CAPACITANCE CHANGE (PERCENT)	1843
MAXIMUM DISSIPATION FACTOR (PERCENT)	1845
MAXIMUM POWER FACTOR (NUMBER)	1849

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1852	THE TEST TEMPERATURE SHALL BE 1852 DEGREES CELSIUS.
1853	THE PLUS TEMPERATURE TOLERANCE SHALL BE 1853 DEGREES CELSIUS.
1854	THE MINUS TEMPERATURE TOLERANCE SHALL BE 1854 DEGREES CELSIUS.
1855	THE TEST DURATION SHALL BE 1855 HOUR(S).
1842	TEMPERATURE, OPERATION, LOW. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1842.
1837	TEMPERATURE, OPERATION, LOW. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1846	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1843	THE CHANGE IN CAPACITANCE SHALL BE NOT GREATER THAN 1843 PERCENT.
1845	THE DISSIPATION FACTOR SHALL BE NOT GREATER THAN 1845 PERCENT.
1849	THE POWER FACTOR SHALL BE NOT GREATER THAN 1849.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, OPERATION, LOW (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM INSERTION LOSS (DECIBELS)	1848
PER ELECTRICAL CHARACTERISTICS TABLE.	1844
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1804
AS FOLLOWS:	1838
TEST TEMPERATURE (DEGREES CELSIUS)	1807
TEST TEMPERATURE TOLERANCE	
PLUS (DEGREES CELSIUS)	1808
MINUS (DEGREES CELSIUS)	1809
TEST DURATION (HOURS)	1810
DUTY CYCLE (SELECT ONE)	
TEST VOLTAGE APPLIED CONTINUOUSLY.	1811
TEST VOLTAGE ON (HOURS)	1812
TEST VOLTAGE OFF (HOURS)	1813

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1848	THE INSERTION LOSS SHALL BE NOT GREATER THAN 1848 DECIBEL(S).
1844	THE ITEM(S) SHALL MEET THE REQUIREMENT(S) LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE AFTER THE TEST.
1804	TEMPERATURE, OPERATION, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1804.
1838	TEMPERATURE, OPERATION, LOW. TESTING SHALL BE PERFORMED AS FOLLOWS:
1807	THE TEST SHALL BE CONDUCTED AT A TEMPERATURE OF 1807 DEGREES CELSIUS.
1808	THE PLUS TEMPERATURE TOLERANCE SHALL BE 1808 DEGREES CELSIUS.
1809	THE MINUS TEMPERATURE TOLERANCE SHALL BE 1809 DEGREES CELSIUS.
1810	THE TEST DURATION SHALL BE 1810 HOUR(S).
181I	THE TEST VOLTAGE SHALL BE APPLIED CONTINUOUSLY.
1812	THE TEST VOLTAGE SHALL BE APPLIED FOR 1812 HOUR(S).
1813	THE TEST VOLTAGE SHALL BE OFF FOR 1813 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, OPERATION, LOW (CONT)	
AS FOLLOWS: (CONT)	
TEST VOLTAGE (PERCENT OF RATED)	1817
MAXIMUM TEST VOLTAGE SURGE (VOLTS)	1821
MAXIMUM TEST CURRENT SURGE (AMPERES)	1822
TERMINAL STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1418
NO EVIDENCE OF PHYSICAL DAMAGE.	1433
MAXIMUM CAPACITANCE CHANGE (PERCENT)	2149
PER ELECTRICAL CHARACTERISTICS TABLE.	1907
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1410
PER MIL-STD-202, METHOD 211.	1375

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1817	THE TEST VOLTAGE SHALL BE 1817 PERCENT OF RATED VOLTAGE.
1821	THE TEST VOLTAGE SURGE SHALL BE NOT GREATER THAN 1821 VOLT(S).
1822	THE TEST SURGE CURRENT SHALL BE NOT GREATER THAN 1822 AMPERE(S).
1418	TERMINAL STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1418.
1433	TERMINAL STRENGTH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2149	THE CHANGE IN CAPACITANCE SHALL BE NOT GREATER THAN 2149 PERCENT.
1907	THE ITEM(S) SHALL MEET THE REQUIREMENT(S) LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE AFTER THE TEST.
1410	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1410.
1375	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 211 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINAL STRENGTH (CONT)	
PER MIL-STD-202, METHOD 211. (CONT)	
*TEST CONDITIONS	
TEST CONDITION A, APPLIED FORCE (SELECT ONE)	
(POUNDS)	1411
(NEWTONS)	1419
TEST CONDITION B, BENDS (NUMBER)	1412
TEST CONDITION C, LOAD (SELECT ONE)	
(POUNDS)	1413
(KILOGRAMS)	1420
TEST CONDITION D.	1414
TEST CONDITION E, TORQUE (SELECT ONE)	
(POUND-INCHES)	1416
(NEWTON METERS)	1421

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH
1411	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1411 POUND(S).	
1419	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1419 NEWTON(S).	
1412	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION B. THERE SHALL BE 1412 BEND(S).	
1413	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1413 POUND(S).	
1420	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1420 KILOGRAM(S).	
1414	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION D.	
1416	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1416 POUND-INCH(S).	
1421	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1421 NEWTON METER(S).	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THERMAL SHOCK	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4722
NO EVIDENCE OF PHYSICAL DAMAGE.	4723
MAXIMUM CAPACITANCE CHANGE (PERCENT)	2150
MAXIMUM DC LEAKAGE (MILLIAMPERES)	2151
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2152
MAXIMUM DISSIPATION FACTOR (PERCENT)	2153
PER ELECTRICAL CHARACTERISTICS TABLE.	1833
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4713
PER MIL-STD-202, METHOD 107.	4714
*TEST CONDITION (LETTER)	4715
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4739

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4722	THERMAL SHOCK (TEMPERATURE CYCLING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4722.
4723	THERMAL SHOCK (TEMPERATURE CYCLING). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2150	THE CHANGE IN CAPACITANCE SHALL BE NOT GREATER THAN 2150 PERCENT.
2151	THE DC LEAKAGE SHALL BE NOT GREATER THAN 2151 MILLIAMPERE(S).
2152	THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 2152 MEGOHM(S).
2153	THE DISSIPATION FACTOR SHALL BE NOT GREATER THAN 2353 PERCENT.
1833	THE ITEM(S) SHALL MEET THE REQUIREMENT(S) LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE AFTER THE TEST.
4713	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT
4714	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 107 OF MIL-STD-202.
4715	TEST CONDITION LETTER 4715 SHALL APPLY.
4719	MOUNTING SHALL BE IN ACCORDANCE WITH 4719.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, HIGH FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1455
NO EVIDENCE OF PHYSICAL DAMAGE.	1456
MAXIMUM CAPACITANCE CHANGE (PERCENT)	2154
MAXIMUM DC LEAKAGE (MILLIAMPERES)	2155
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2156
MAXIMUM DISSIPATION FACTOR (PERCENT)	2157
NO OPEN, NO SHORT CIRCUITS.	2158
PER ELECTRICAL CHARACTERISTICS TABLE.	1839
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1446
PER MIL-STD-202, METHOD 204.	1447
*TEST CONDITION (LETTER)	1448

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1455	VIBRATION, HIGH FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1455.
1456	VIBRATION, HIGH FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2154	THE CHANGE IN CAPACITANCE SHALL BE NOT GREATER THAN 2154 PERCENT.
2355	THE DC LEAKAGE SHALL BE NOT GREATER THAN 2155 MILLIAMPERE(S).
2156	THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 2156 MEGOHM(S).
2157	THE DISSIPATION FACTOR SHALL BE NOT GREATER THAN 2157 PERCENT.
2158	THERE SHALL BE NO OPEN OR SHORT CIRCUITS DURING THE TEST.
1839	THE ITEM(S) SHALL MEET THE REQUIREMENT(S) LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE AFTER THE TEST.
1446	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1446.
1447	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 204 OF MIL-STD-202.
1448	TEST CONDITION LETTER 1448 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, HIGH FREQUENCY (CONT)	
PER MIL-STD-202, METHOD 204. (CONT)	
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4709
NORMAL MOUNTING MEANS.	4708
MOUNT PER DOCUMENT (DOC DES)	4707
METHOD OF DETERMINING MECHANICAL RESONANCE (SELECT ONE)	
VISUALLY BY MEANS OF A STROBOTAC.	1533
ELECTRICAL OUTPUT INDICATORS.	1534
VIBRATION, LOW FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1475
NO EVIDENCE OF PHYSICAL DAMAGE.	1476
MAXIMUM CAPACITANCE CHANGE (PERCENT)	2159
MAXIMUM DC LEAKAGE (MILLIAMPERES)	2160
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2161

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4709	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4708	MOUNTING SHALL BE BY THE NORMAL METHOD.
4707	MOUNTING SHALL BE IN ACCORDANCE WITH 4707.
1533	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE VISUALLY BY MEANS OF A STROBOTAC.
1534	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE BY ELECTRICAL OUTPUT INDICATORS.
1475	VIBRATION, LOW FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1475.
1476	VIBRATION, LOW FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2159	THE CHANGE IN CAPACITANCE SHALL BE NOT GREATER THAN 2159 PERCENT.
2160	THE DC LEAKAGE SHALL BE NOT GREATER THAN 2160 MILLIAMPERE(S).
2161	THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 2161 MEGOHM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
MAXIMUM DISSIPATION FACTOR (PERCENT)	2162
NO OPEN, NO SHORT CIRCUITS.	2163
PER ELECTRICAL CHARACTERISTICS TABLE.	1840
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1466
PER MIL-STD-202, METHOD 210.	1467
DURATION OF VIBRATION PER AXIS (HOURS)	1470
DIRECTION OF MOTION (SELECT ONE)	
PARALLEL TO LONGITUDINAL AXIS.	1535
PERPENDICULAR TO LONGITUDINAL AXIS.	1536
THREE MUTUALLY PERPENDICULAR DIRECTIONS.	1537
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4731
NORMAL MOUNTING METHOD.	4730
MOUNT PER DOCUMENT (DOC DES)	4729

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2162	THE DISSIPATION FACTOR SHALL BE NOT GREATER THAN 2162 PERCENT.
2163	THERE SHALL BE NO OPEN OR SHORT CIRCUITS DURING THE TEST.
1840	THE ITEM(S) SHALL MEET THE REQUIREMENT(S) LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE AFTER THE TEST.
1466	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1466.
1467	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 201 OF MIL-STD-202.
1470	DURATION OF TEST SHALL BE 1470 HOUR(S) PER AXIS.
1535	THE DIRECTION OF MOTION SHALL BE PARALLEL TO THE LONGITUDINAL AXIS.
1536	THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE LONGITUDINAL AXIS.
1537	THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUALLY PERPENDICULAR DIRECTIONS.
4731	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4730	MOUNTING SHALL BE BY THE NORMAL METHOD.
4729	MOUNTING SHALL BE IN ACCORDANCE WITH 4729.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1435
NO EVIDENCE OF PHYSICAL DAMAGE.	1436
MAXIMUM CAPACITANCE CHANGE (PERCENT)	2164
MAXIMUM DC LEAKAGE (MILLIAMPERES)	2165
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2166
MAXIMUM DISSIPATION FACTOR (PERCENT)	2167
NO OPEN, NO SHORT CIRCUITS.	2168
PER ELECTRICAL CHARACTERISTICS TABLE.	2172
TEST METHOD (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1426
PER MIL-STD-202, METHOD 214.	1427
*TEST CONDITION (ROMAN NUMERAL AND LETTER)	1428

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1435	VIBRATION, RANDOM. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1435.
1436	VIBRATION, RANDOM. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2164	THE CHANGE IN CAPACITANCE SHALL BE NOT GREATER THAN 2164 PERCENT.
2165	THE DC LEAKAGE SHALL BE NOT GREATER THAN 2165 MILLIAMPERE(S).
2166	THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 2166 MEGOHM(S).
2167	THE DISSIPATION FACTOR SHALL BE NOT GREATER THAN 2167 PERCENT.
2368	THERE SHALL BE NO OPEN OR SHORT CIRCUITS DURING THE TEST.
2172	THE ITEM(S) SHALL MEET THE REQUIREMENT(S) LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE AFTER THE TEST.
1426	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1426.
1427	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 214 OF MIL-STD-202.
1428	TEST CONDITION NUMBER AND LETTER 1428 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
PER MIL-STD-202, METHOD 214. (CONT).	
*DURATION OF APPLICATION (SELECT ONE)	
(MINUTES)	1438
(HOURS)	1431
MONITORING INSTRUMENTATION OF EXCITATION (SELECT ONE)	
ANY SUITABLE SYSTEM.	1452
CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.	1453
CALIBRATED OSCILLOSCOPE.	1459
NUMBER OF VIBRATION MONITORING TEST POINTS (QUANTITY)	1430
LOCATION OF MONITORING POINTS (SELECT ONE)	
ANY SUITABLE LOCATION.	1439
AS CLOSE AS PRACTICAL TO TEST SPECIMEN.	1462

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1438	THE DURATION OF THE TEST SHALL BE 1438 MINUTE(S).
1431	THE DURATION OF THE TEST SHALL BE 1431 HOUR(S).
1452	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE ANY SUITABLE INSTRUMENTATION SYSTEM.
453	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.
1459	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED OSCILLOSCOPE.
1430	THERE SHALL BE 1430 VIBRATION MONITORING POINT(S).
1439	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE ANY SUITABLE LOCATION.
1462	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE AS CLOSE AS PRACTICAL TO THE TEST SPECIMEN(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
PER MIL-STD-202, METHOD 214. (CONT)	
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4977
NORMAL MOUNTING METHOD.	4976
MOUNT PER DOCUMENT (DOC DES)	4975
VOLT AMPERE RATING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1747
PER ELECTRICAL CHARACTERISTICS TABLE.	1828
*NOTE: SEE APPENDIX A, TABLE III.	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1750
AS FOLLOWS:	1829
TEST FREQUENCY (HERTZ)	1751
TEST VOLTAGE (VOLTS)	1752
TEST TEMPERATURE (DEGREES CELSIUS)	1753

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4977 MOUNTING SHALL BE BY ANY SUITABLE METHOD.

4976 MOUNTING SHALL BE BY THE NORMAL METHOD.

4975 MOUNTING SHALL BE IN ACCORDANCE WITH 4975.

1747 VOLT AMPERE RATING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1747.

1828 VOLT AMPERE RATING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE VALUE(S) LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE.

1750 VOLT AMPERE RATING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1750.

1829 VOLT AMPERE RATING. TESTING SHALL BE PERFORMED AS FOLLOWS:

1751 TEST SHALL BE CONDUCTED AT A FREQUENCY OF 1751 HERTZ.

1752 TEST SHALL BE CONDUCTED AT A VOLTAGE OF 1752 VOLT(S).

1753 TEST SHALL BE CONDUCTED AT A TEMPERATURE OF 1753 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VOLTAGE, REVERSE RATING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1720
AS FOLLOWS:	1826
NO EVIDENCE OF PHYSICAL DAMAGE.	1721
MAXIMUM CAPACITANCE CHANGE (PERCENT)	1620
MAXIMUM DISSIPATION FACTOR (PERCENT)	1621
PER ELECTRICAL CHARACTERISTICS TABLE.	1729
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1723
AS FOLLOWS:	1827
REVERSE VOLTAGE (VOLTS, DC)	1614
DURATION OF APPLICATION (HOURS)	1615
TEST TEMPERATURE (DEGREES CELSIUS)	1619

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1720	VOLTAGE, REVERSE RATING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1720.
1826	VOLTAGE, REVERSE RATING. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1721	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1620	THE CHANGE IN CAPACITANCE SHALL BE NOT GREATER THAN 1620 PERCENT.
1621	THE DISSIPATION FACTOR SHALL BE NOT GREATER THAN 1621 PERCENT.
1729	THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE VALUE(S) LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE.
1723	VOLTAGE, REVERSE RATING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1723,
1827	VOLTAGE, REVERSE RATING. TESTING SHALL BE PERFORMED AS FOLLOWS:
1614	TESTING SHALL BE PERFORMED AT 1614 VOLT(S) DC.
1615	THE REVERSE VOLTAGE SHALL BE APPLIED FOR 1615 HOUR(S).
1619	THE TEST TEMPERATURE SHALL BE 1619 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VOLTAGE, REVERSE RATING (CONT)	
AS FOLLOWS: (CONT)	
FORWARD VOLTAGE (VOLTS, DC)	1724
DURATION OF FORWARD VOLTAGE (HOURS)	1616
TEST CURRENT (AMPERES)	1617
TEST CURRENT TOLERANCE (PERCENT)	1618
VOLTAGE, RIPPLE RATING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1981
AS FOLLOWS:	2094
RIPPLE VOLTAGE (MILLIVOLTS)	2090
MAXIMUM TEMPERATURE RISE (DEGREES CELSIUS)	1982
FREQUENCY (MEGAHERTZ)	2093
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1984
AS FOLLOWS:	2001

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1724	AFTER THE SPECIFIED TIME AT REVERSE VOLTAGE, A FORWARD VOLTAGE OF 1724 VOLT(S) SHALL BE APPLIED.
1616	THE FORWARD VOLTAGE SHALL BE APPLIED FOR 1616 HOUR(S) PRIOR TO PARAMETER MEASUREMENT.
1617	THE TEST CURRENT SHALL BE 1617 AMPERE(S).
1618	THE TEST CURRENT TOLERANCE SHALL BE 1618 PERCENT.
1981	VOLTAGE, RIPPLE RATING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1981.
2094	VOLTAGE, RIPPLE RATING. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2090	THE RIPPLE VOLTAGE SHALL BE 2090 MILLIVOLT(S).
1982	THE TEMPERATURE RISE SHALL BE NOT GREATER THAN 1982 DEGREES CELSIUS.
2093	THE FREQUENCY SHALL BE 2093 MEGAHERTZ.
1984	VOLTAGE, RIPPLE RATING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1984.
2001	VOLTAGE, RIPPLE RATING. TESTING SHALL BE PERFORMED AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VOLTAGE, RIPPLE RATING (CONT)	
AS FOLLOWS: (CONT)	
TEST FREQUENCY (MEGAHERTZ)	2091
AMBIENT TEMPERATURE (DEGREES CELSIUS)	1985
VOLTAGE STANDING WAVE RATIO (VSWR)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2061
MAXIMUM VSWR (NUMBER OF UNITS)	2062
MAXIMUM TEMPERATURE RISE (DEGREES CELSIUS)	2063
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2051
AS FOLLOWS:	1830
TEST FREQUENCY (MEGAHERTZ)	2053
OUTPUT LOAD (WATTS)	2054

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2091	TESTING SHALL BE PERFORMED AT A FREQUENCY OF 2091 MEGAHERTZ.
1985	THE AMBIENT TEMPERATURE SHALL BE 1985 DEGREES CELSIUS.
2061	VOLTAGE STANDING WAVE RATIO (VSWR). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2061.
2062	VOLTAGE STANDING WAVE RATIO (VSWR). THE VOLTAGE STANDING WAVE RATIO SHALL BE NOT GREATER THAN 2062.
2063	THE TEMPERATURE RISE SHALL BE NOT GREATER THAN 2063 DEGREES CELSIUS.
2051	VOLTAGE STANDING WAVE RATIO (VSWR). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2051.
1830	VOLTAGE STANDING WAVE RATIO (VSWR). TESTING SHALL BE PERFORMED AS FOLLOWS:
2053	THE TEST FREQUENCY SHALL BE 2053 MEGAHERTZ.
2054	THE TEST OUTPUT LOAD SHALL BE 2054 WATT(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VOLTAGE STANDING WAVE RATIO (VSWR) (CONT)	
AS FOLLOWS: (CONT)	
INPUT LOAD (SELECT ONE)	
(WATTS)	2055
(PERCENT OF RATED)	2056
TEST TEMPERATURE (DEGREES CELSIUS)	2057
VOLTAGE, SURGE RATING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1576
AS FOLLOWS:	1640
NO EVIDENCE OF PHYSICAL DAMAGE.	1641
MAXIMUM CAPACITANCE CHANGE (PERCENT)	1609
MINIMUM INSULATION RESISTANCE (MEGOHMS)	1611
PER ELECTRICAL CHARACTERISTICS TABLE.	1642
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1580

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH

2055 THE TEST INPUT LOAD SHALL BE 2055 WATT(S).

2056 THE TEST INPUT LOAD SHALL BE 2056 PERCENT OF RATED LOAD.

2057 THE TEST TEMPERATURE SHALL BE 2057 DEGREES CELSIUS.

1576 VOLTAGE, SURGE RATING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1576.

1640 VOLTAGE, SURGE RATING. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

1641 THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

1609 THE CHANGE IN CAPACITANCE SHALL BE NOT GREATER THAN 1609 PERCENT.

1611 THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 1611 MEGOHM(S).

1642 THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE VALUE(S) LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE .

1580 VOLTAGE, SURGE RATING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1580.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VOLTAGE, SURGE RATING (CONT)	
TEST METHODS (CONT)	
AS FOLLOWS:	1632
MAXIMUM APPLIED VOLTAGE (VOLTS)	1766
VOLTAGE ON TIME (SECONDS)	1633
VOLTAGE OFF TIME (MINUTES)	1634
VOLTAGE CYCLES (QUANTITY)	1645
TEST TEMPERATURE (DEGREES CELSIUS)	1589
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A_____	7001
B_____	7002
C_____	7003
D_____	7004
E_____	7005

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1632	VOLTAGE, SURGE RATING. TESTING SHALL BE PERFORMED AS FOLLOWS:
1766	THE VOLTAGE APPLIED SHALL BE NOT GREATER THAN 1766 VOLT(S).
1633	THE VOLTAGE SHALL BE ON FOR 1633 SECOND(S).
1634	THE VOLTAGE SHALL BE OFF FOR 1634 MINUTE(S).
1645	THE SURGE VOLTAGE TEST SHALL BE RUN FOR 1645 VOLTAGE CYCLE(S).
1589	THE TEST SHALL BE CONDUCTED AT A TEMPERATURE OF 1589 DEGREES CELSIUS.
	MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
POSITIVE TERMINAL (ANODE) MARKING	
PER BASE DOCUMENT EXCEPT _____	1763
IDENTIFY POSITIVE TERMINAL(S).	1764
PER ELECTRICAL CHARACTERISTICS TABLE.	1765
*NOTE: SEE APPENDIX A, TABLE III.	
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629
ADDITIONAL PART MARKING	
A_____	6991
B_____	6992
C_____	6993
D_____	6994
E_____	6995

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1763	POSITIVE TERMINAL MARKING. THE IDENTIFICATION OF THE POSITIVE TERMINAL(S) SHALL BE IN ACCORDANCE WITH THE MARKING REQUIREMENTS OF THE BASE DOCUMENT, EXCEPT 1763.
1764	POSITIVE TERMINAL MARKING. THE PART MARKING SHALL INCLUDE IDENTIFICATION OF THE POSITIVE (ANODE) TERMINAL(S).
1765	POSITIVE TERMINAL MARKING. THE PART MARKING SHALL INCLUDE IDENTIFICATION OF THE POSITIVE TERMINAL(S) LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE.
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.
	ADDITIONAL PART MARKING.
6991	(A) 6993.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DEFINITION OF HERMETIC SEALING	
NOTE: AUTOMATIC WHEN CODE 1820 IS USED TO REQUIRE HERMETIC SEALING.	
SHORTING WIRE	
UNINSULATED SHORTING WIRE INSTALLED BETWEEN TERMINALS.	2092
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	DEFINITION OF HERMETIC SEALING. FOR THE PURPOSE OF THIS DOCUMENT, A HERMETICALLY-SEALED ITEM IS ONE IN WHICH THE ELEMENT IS CONTAINED WITHIN A SEALED ENCLOSURE OF CERAMIC, GLASS OR METAL, OR A COMBINATION THEREOF, WHERE SEALING IS ACCOMPLISHED BY MATERIAL FUSION, WELDING, BRAZING OR SOLDERING.
2092	SHORTING WIRE. ALL UNITS SHALL BE SUPPLIED WITH AN UNINSULATED SHORTING WIRE CONNECTED BETWEEN THE TERMINALS.

Custodians:
Army-MI

Review activities:

Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User Activity:
Army-MU

Preparing Activity:

Army-MI

(Project EDS-A239)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX A

TABLES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE III. ELECTRICAL CHARACTERISTICS TABLE.

ELECTRICAL CHARACTERISTICS. CAPACITOR SECTION NUMBERS IDENTIFY EACH OF ONE OR MORE CAPACITORS MOUNTED IN A COMMON ENCLOSURE. EACH CAPACITOR SECTION SHALL MEET THE RESPECTIVE REQUIREMENTS LISTED IN THE ELECTRICAL CHARACTERISTICS TABLE.

ELECTRICAL CHARACTERISTICS TABLE

	CAPACITOR SECTION NUMBER			
	1	2	3	4
CAPACITANCE, MICROFARAD	1562	3060	3061	3062
CAPACITANCE, PICOFARAD	1563	3064	3065	3066
TOLERANCE, PLUS PCT	1564	3068	3069	3070
TOLERANCE, MINUS PCT	1565	3072	3073	3074
VOLTAGE RATING, VOLT MAX	1582	2065	3077	3078
TYPE VOLTAGE FOR RATING	1583	2066	3081	3082
VOLT RATING TEMP, CELSIUS	1584	2067	3085	3086
SURGE VOLTAGE, VOLT MAX,	1608	3088	3089	3090
DC LEAKAGE, MICROA MAX	1587	3092	3093	3094
INSUL RES, MEGOHMS MIN	1386	3096	3097	3098
DISSIPATION FAC, PCT MAX	1590	3100	3101	3102
POWER FACTOR, MAX	1596	3104	3105	3106
QUALITY FACTOR, MIN	1658	3108	3109	3110
FREQUENCY RATING, HERTZ	3111	3112	3113	3114
PULSE CURRENT, A MAX	2095	2098	3117	3118
CURRENT RATING, A MAX	3119	3120	3121	3122
VOLT AMPERE RATING, MIN	1601	3124	3125	3126
ESR, OHMS MAX	3127	3128	3129	3130
IMPEDANCE, OHMS MAX	1624	3132	3133	3134
TEMP COEF, PPM/DEG	1612	3136	3137	3138
TEMP COEF TOL, PPM/DEG	3139	3140	3141	3142
TEMP CHAR, PCT	3143	3144	3345	3346
TEMP CHAR TOL, PCT	3147	3148	3149	31150
POS TERM IDENTIFIER	1569	3152	3153	3154

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE III. ELECTRICAL CHARACTERISTICS TABLE. (CONT)

ELECTRICAL CHARACTERISTICS TABLE

	CAPACITOR SECTION NUMBER			
	5	6	7	8
CAPACITANCE, MICROFARAD	3155	3156	3157	3158
CAPACITANCE, PICOFARAD	3159	3160	3161	3162
TOLERANCE, PLUS PCT	3163	3164	3165	3166
TOLERANCE, MINUS PCT	3167	3168	3169	3170
VOLTAGE RATING, VOLT MAX	3171	3172	3173	3174
TYPE VOLTAGE FOR RATING	3175	3176	3177	3178
VOLT RATING TEMP, CELSIUS	31179	3180	3181	3382
SURGE VOLTAGE, VOLT MAX	3183	3184	3185	3186
DC LEAKAGE, MICROA MAX	3187	3188	3189	3190
INSUL RES, MEGOHMS MIN	3191	3192	3193	3194
DISSIPATION FAC, PCT MAX	3195	3196	3197	3198
POWER FACTOR, MAX	3199	3200	3201	3202
QUALITY FACTOR, MIN	3203	3204	3205	3206
FREQUENCY RATING, HERTZ	3207	3208	3209	3210
PULSE CURRENT, A MAX	3211	3212	3213	3214
CURRENT RATING, A MAX	3215	3216	3237	3218
VOLT AMPERE RATING, MIN	3219	3220	3221	3222
ESR, OHMS MAX	3223	3224	3225	3226
IMPEDANCE, OHMS MAX	3227	3228	3229	3230
TEMP COEF, PPM/DEG	3231	3232	3233	3234
TEMP COEF TOL, PPM/DEG	3235	3236	3237	3238
TEMP CHAR, PCT	3239	3240	3241	3242
TEMP CHAR TOL, PCT	3243	3244	3245	3246
POS TERM IDENTIFIER	3247	3248	3249	3250

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE III. ELECTRICAL CHARACTERISTICS TABLE. (CONT)

ELECTRICAL CHARACTERISTICS TABLE

	CAPACITOR SECTION NUMBER			
	9	10	11	12
CAPACITANCE, MICROFARAD	3251	3252	3253	3254
CAPACITANCE, PICOFARAD	3255	3256	3257	3258
TOLERANCE, PLUS PCT	3259	3260	3261	3262
TOLERANCE, MINUS PCT	3263	3264	3265	3266
VOLTAGE RATING, VOLT MAX	3267	3268	3269	3270
TYPE VOLTAGE FOR RATING	3271	3272	3273	3274
VOLT RATING TEMP, CELSIUS	3275	3276	3277	3278
SURGE VOLTAGE, VOLT MAX	3279	3280	3281	3282
DC LEAKAGE, MICROA MAX	3283	3284	3285	3286
INSUL RES, MEGOHMS MIN	3287	3288	3289	3290
DISSIPATION FAC, PCT MAX	3291	3292	3293	3294
POWER FACTOR, MAX	3295	3296	3297	3298
QUALITY FACTOR, MIN	3299	3300	3301	3302
FREQUENCY RATING, HERTZ	3303	3304	3305	3306
PULSE CURRENT, A MAX	3307	3308	3309	3310
CURRENT RATING, A MAX	3311	3312	3313	3314
VOLT AMPERE RATING, MIN	3315	3316	3317	3318
ESR, OHMS MAX	3319	3320	3321	3322
IMPEDANCE, OHMS MAX	3323	3324	3325	3326
TEMP COEF, PPM/DEG	3327	3328	3329	3330
TEMP COEF TOL, PPM/DEG	3331	3332	3333	3334
TEMP CHAR, PCT	3335	3336	3337	3338
TEMP CHAR TOL, PCT	3339	3340	3341	3342
POS TERM IDENTIFIER	3343	3344	3345	3346

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE III. ELECTRICAL CHARACTERISTICS TABLE. [CONT)

ELECTRICAL CHARACTERISTICS TABLE

	CAPACITOR SECTION NUMBER			
	13	14	15	16
CAPACITANCES MICROFARAD	3347	3348	3349	3350
CAPACITANCE, PICOFARAD	3351	3352	3353	3354
TOLERANCE, PLUS PCT	3355	3356	3357	3358
TOLERANCE, MINUS PCT	3359	3360	3361	3362
VOLTAGE RATING, VOLT MAX	3363	3364	3365	3366
TYPE VOLTAGE FOR RATING	3367	3368	3369	3370
VOLT RATING TEMP, CELSIUS	3371	3372	3373	3374
SURGE VOLTAGE, VOLT MAX	3375	3376	3377	3378
DC LEAKAGE, MICRO MAX	3379	3380	33811	3382
INSUL RES, MEGOHMS MIN	3383	3384	3385	3386
DISSIPATION FAC, PCT MAX	3387	3388	3389	3390
POWER FACTOR, MAX	33911	3392	3393	3394
QUALITY FACTOR, MIN	3395	3396	3397	3398
FREQUENCY RATING, HERTZ	3399	3400	3401	3402
PULSE CURRENT, A MAX	3403	3404	3405	3406
CURRENT RATING, A MAX	3407	3408	3409	3410
VOLT AMPERE RATING, MIN	3411	3432	3413	3414
ESR, OHMS MAX	3415	3416	3417	3418
IMPEDANCE, OHMS MAX	3419	3420	3421	3422
TEMP COEF, PPM/DEG	3423	3424	3425	3426
TEMP COEF TOL, PPM/DEG	3427	3428	3429	3430
TEMP CHAR, PCT	3431	3432	3433	3434
TEMP CHAR TOL, PCT	3435	3436	3437	3438
POS TERM IDENTIFIER	3439	3440	3441	3442


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX El


ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

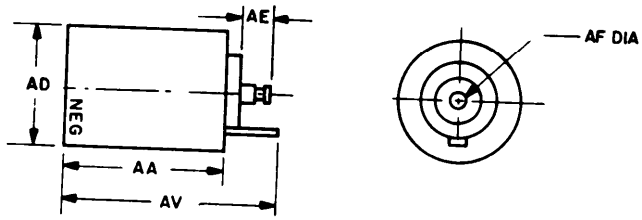

003-01-1

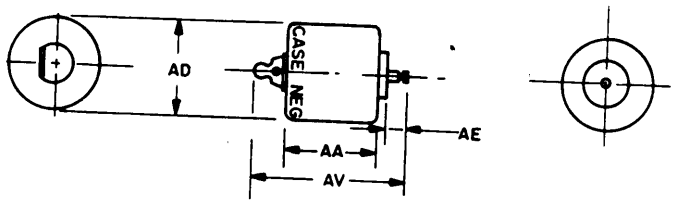


003-01-2

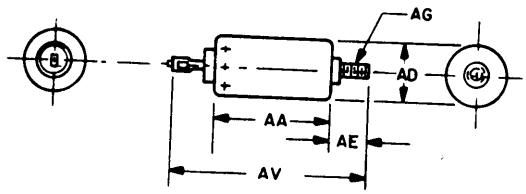


003-01-3


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

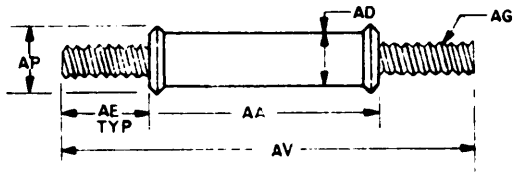

003-01-4

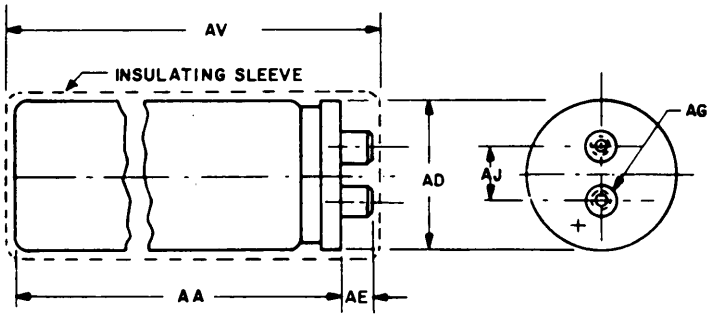


003-01-5

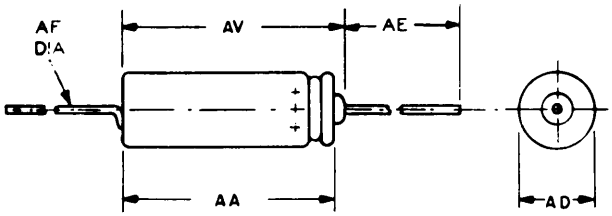


003-01-6


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

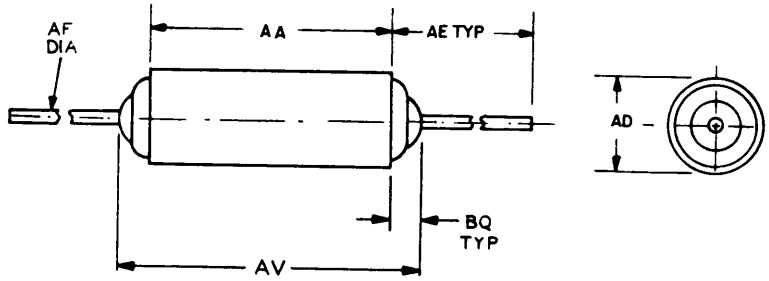

003-01-7

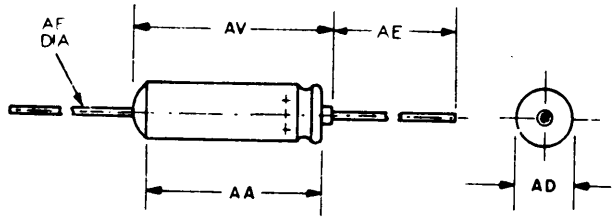


003-01-8

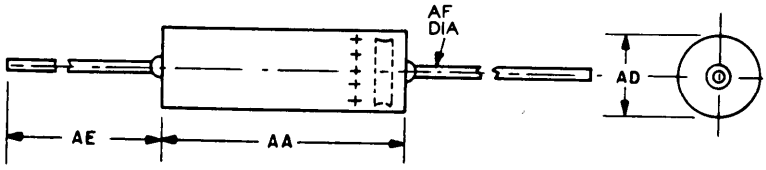


003-01-9


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

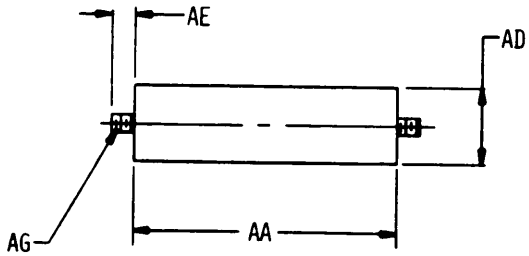

003-01-10

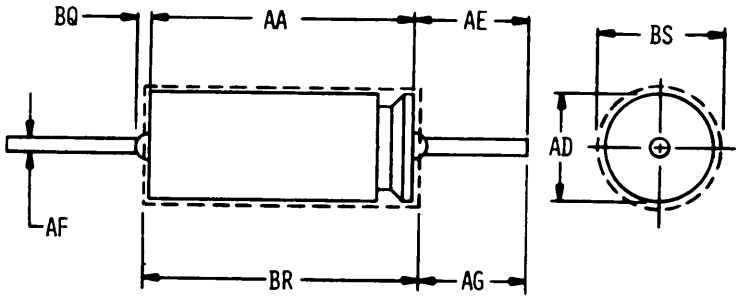


003-01-11

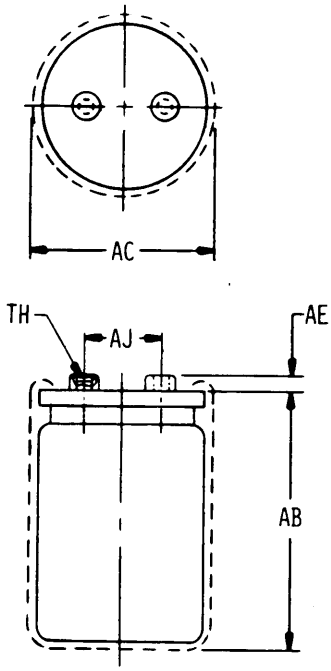


003-01-12


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

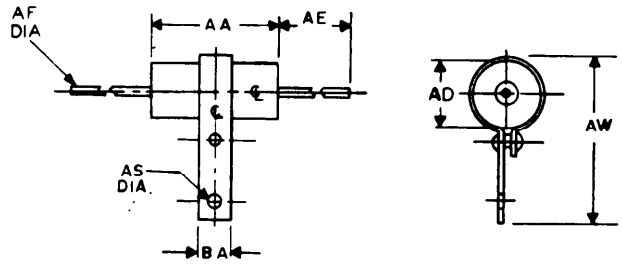


003-02-1

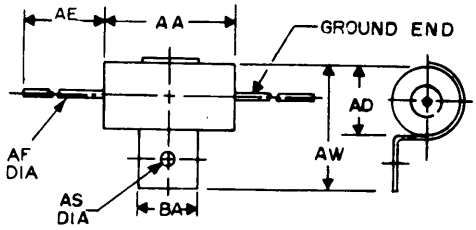

003-02-2

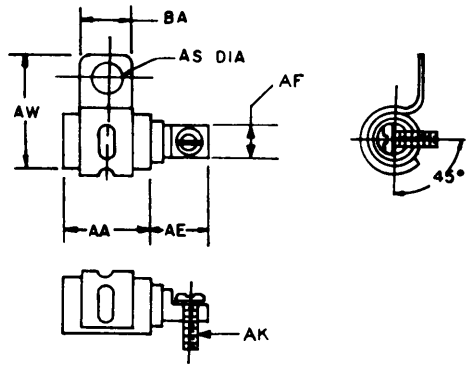


003-02-3

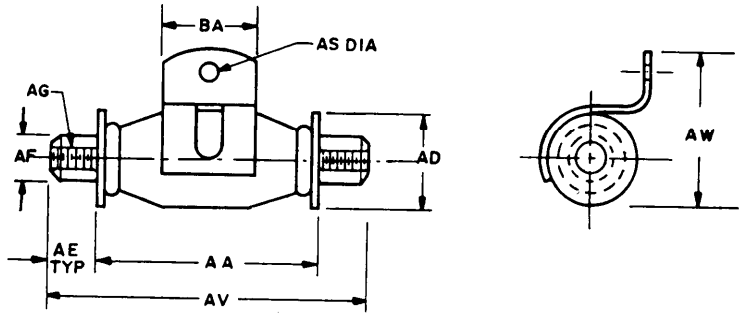


003-02-4


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

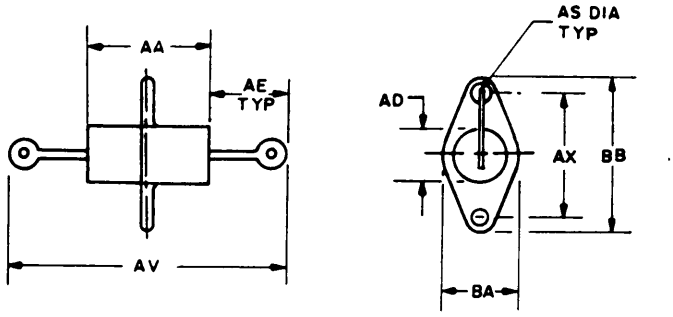

003-02-5

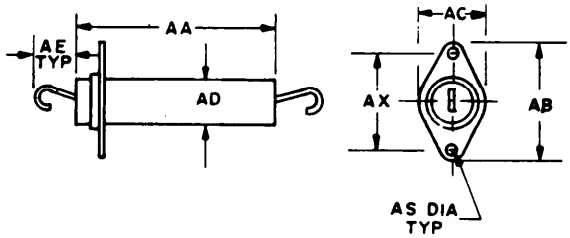


003-02-6

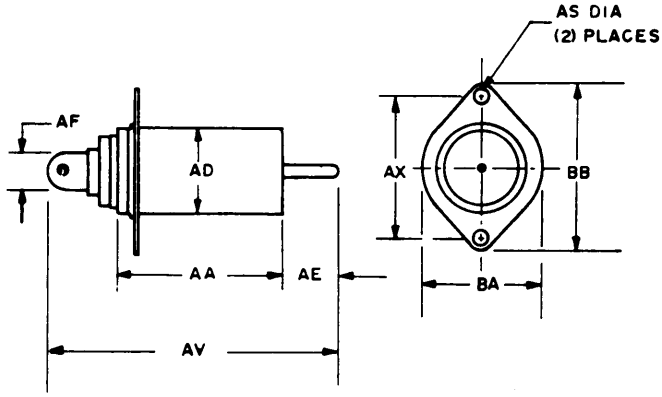


003-02-7


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

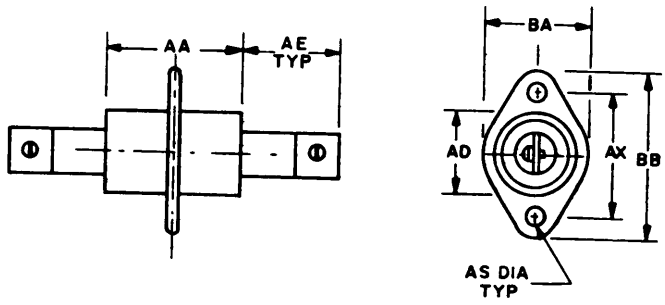


003-02-8



003-02-9




003-02-10

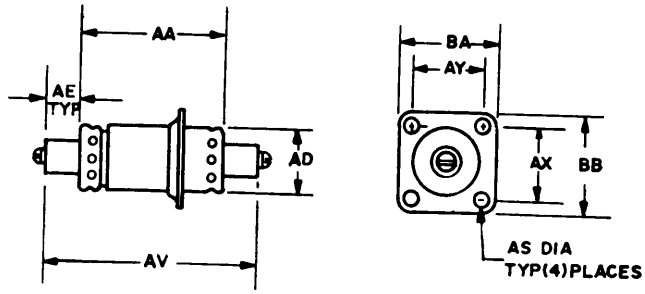


003-02-11


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

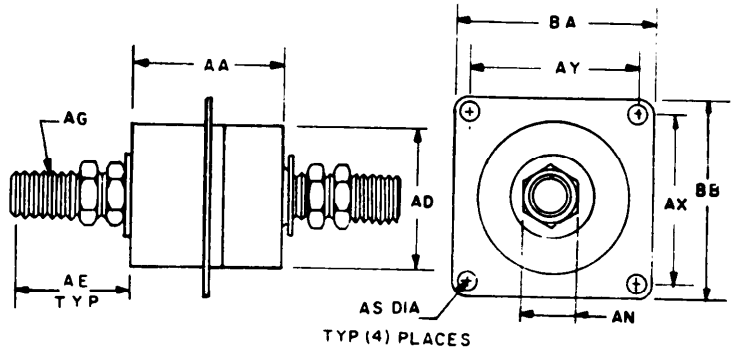

003-02-12

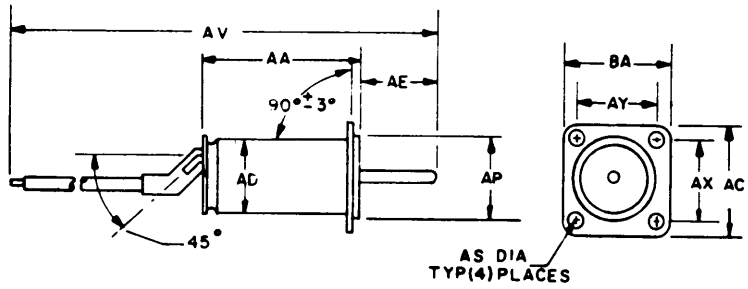


003-02-13

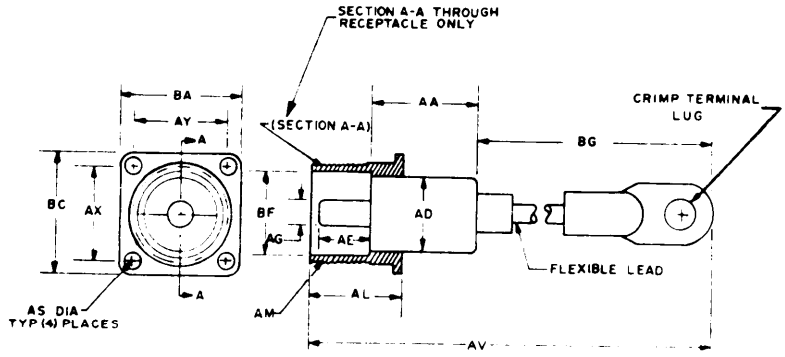


003-02-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

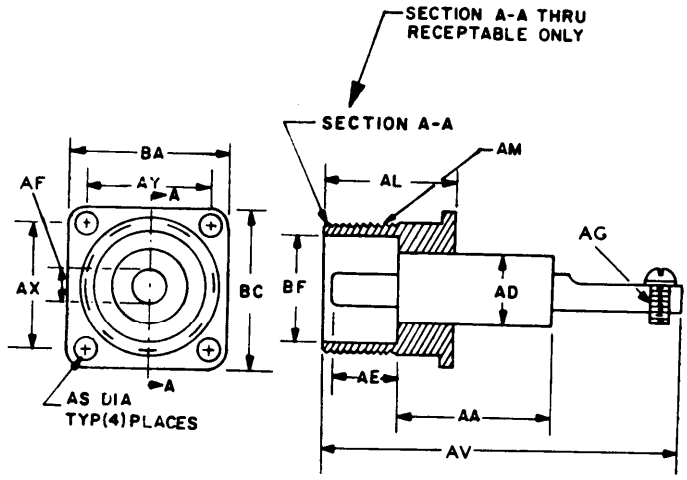


003-02-15

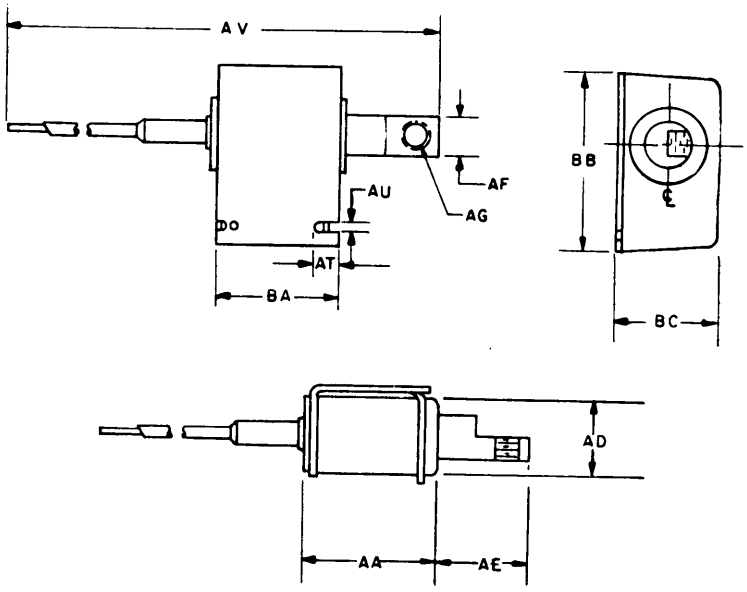


003-02-16

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

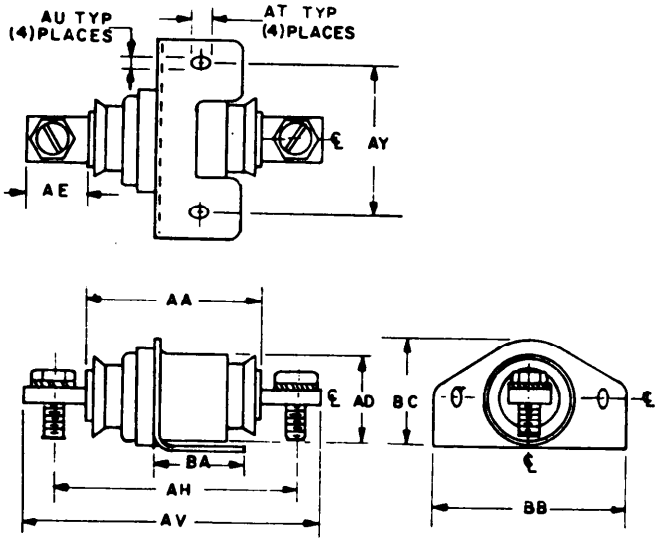


003-02-17

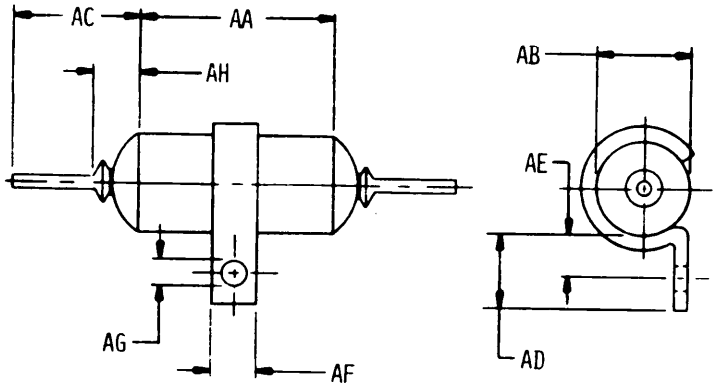


003-02-18


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.




003-03-1




003-03-2

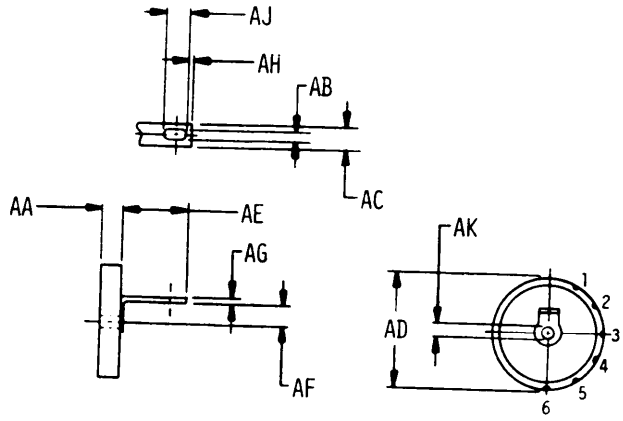


003-03-3






003-03-4


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

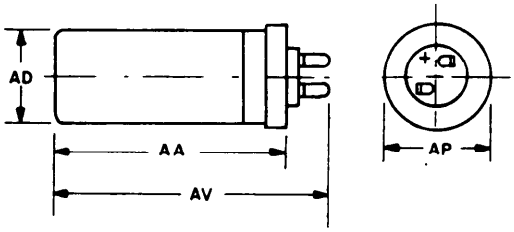


003-04-1

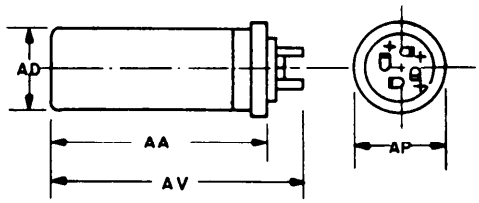

003-04-2

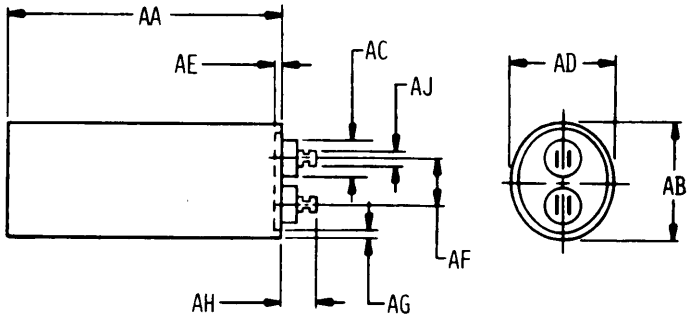


003-04-3

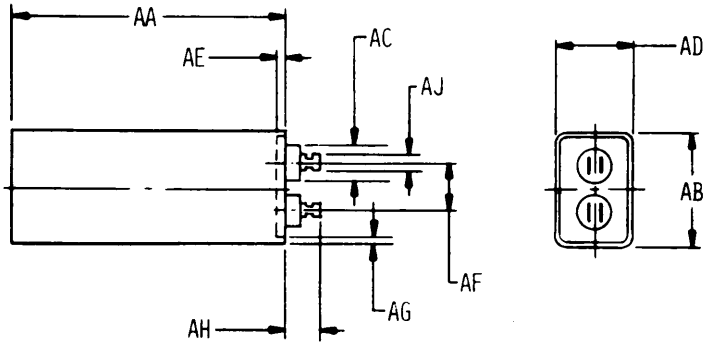


003-04-4


Source: https://assist.dla.mil -- Downloaded: 20261O-26T07:23Z
Check the source to verify that this is the current version before use.

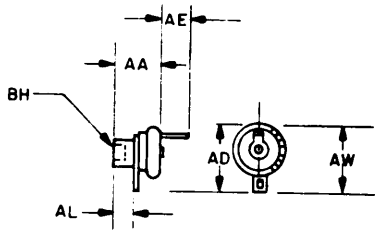


003-05-1

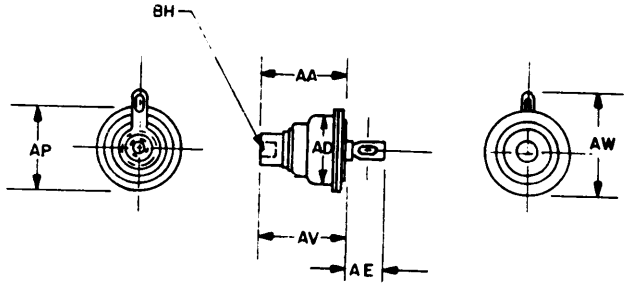


003-05-2

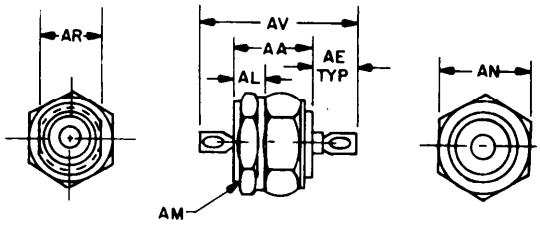

003-06-1

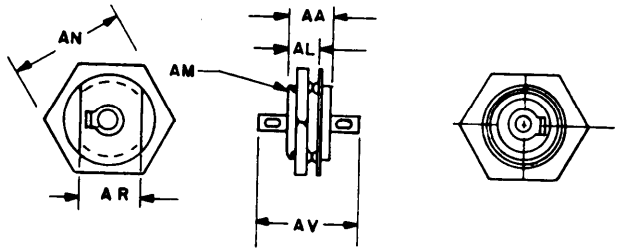


003-06-2

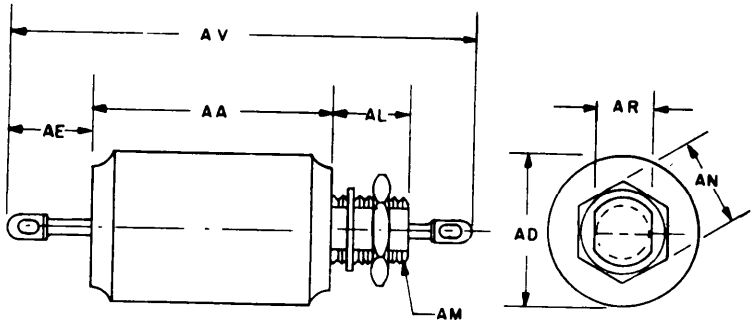


003-06-3


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

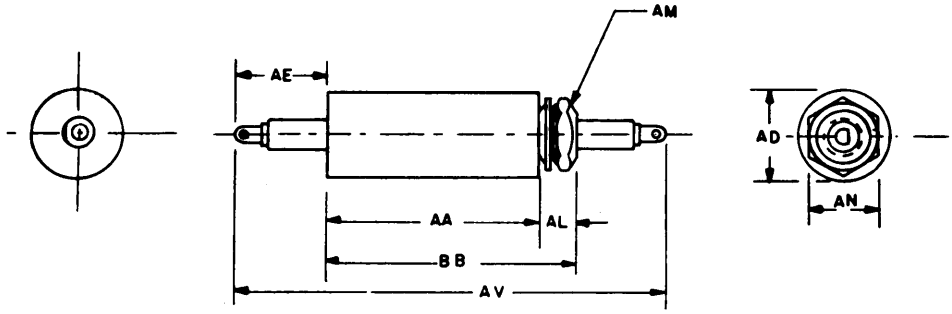

003-06-4

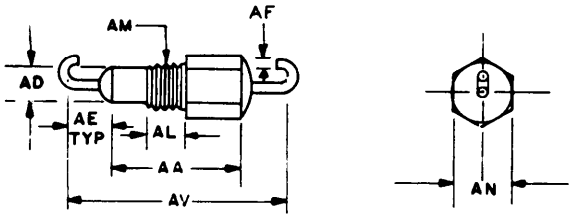


003-06-5

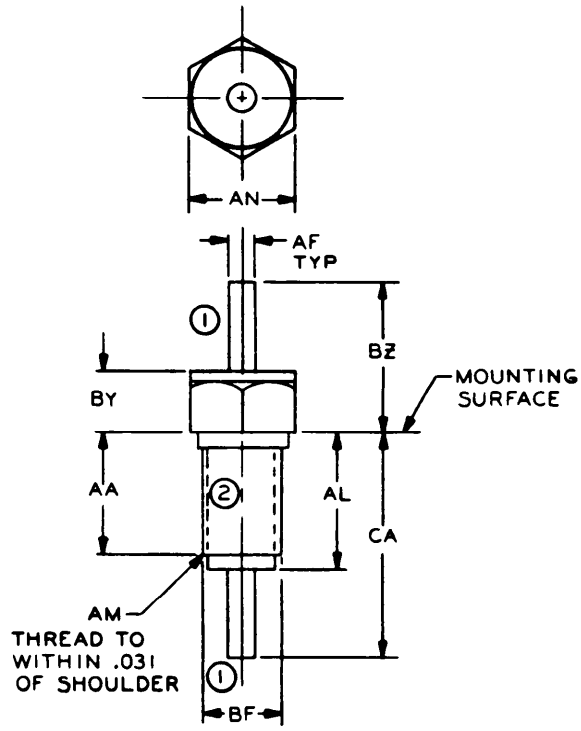


003-06-6


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

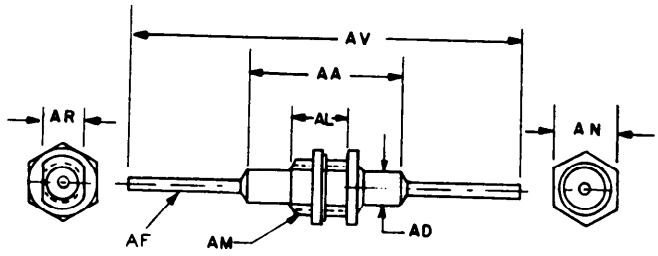


003-06-7

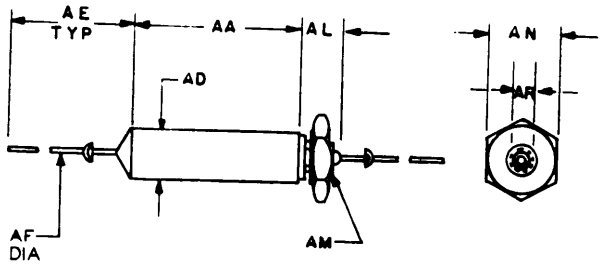

003-06-8

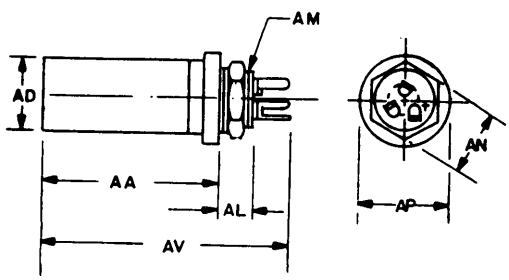


003-06-9

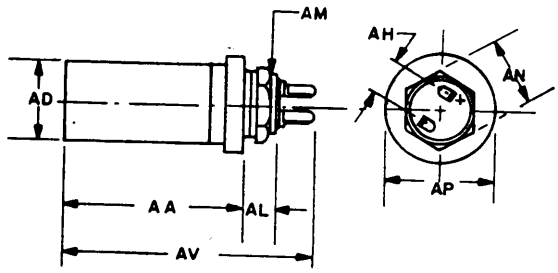


003-06-10


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

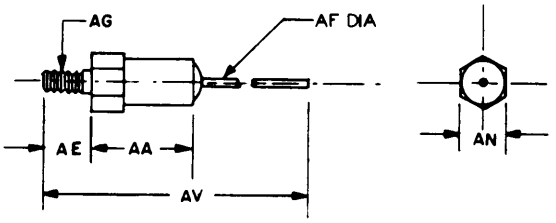


003-06-11

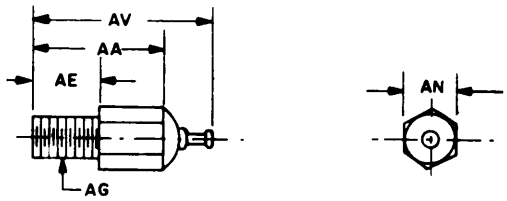

003-06-12

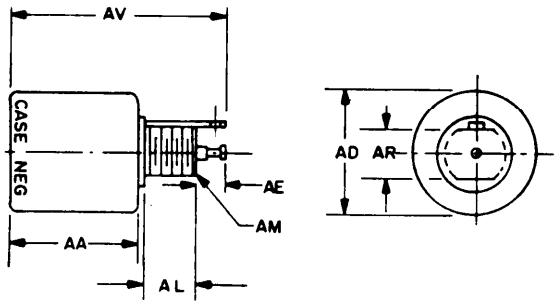


003-06-13

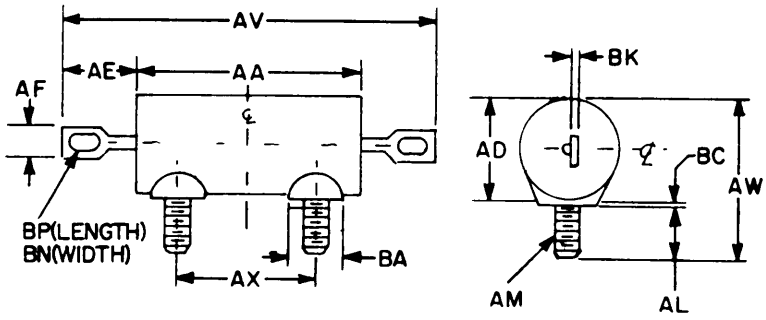



003-06-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

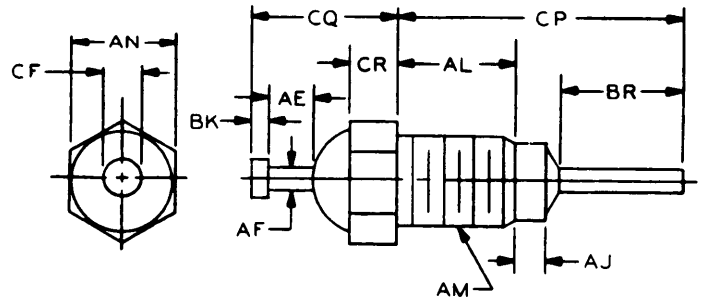


003-06-15



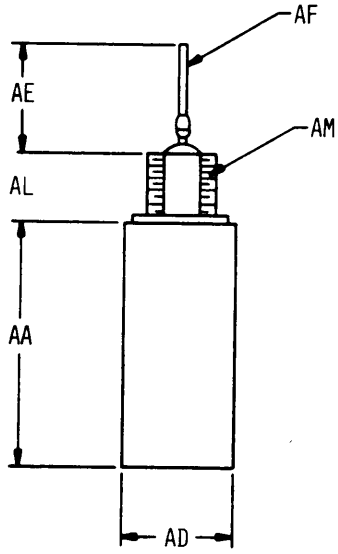


003-06-16


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

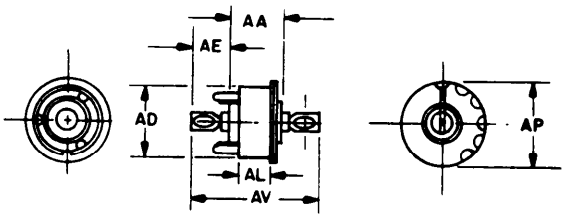


003-07-1




003-07-2



003-07-3




003-07-4

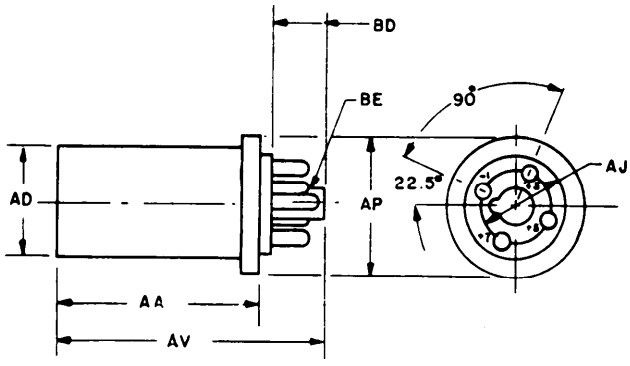


003-08-1


Source: https://assist.dla.mil -- Downloaded: 20261O-26T07:23Z
Check the source to verify that this is the current version before use.

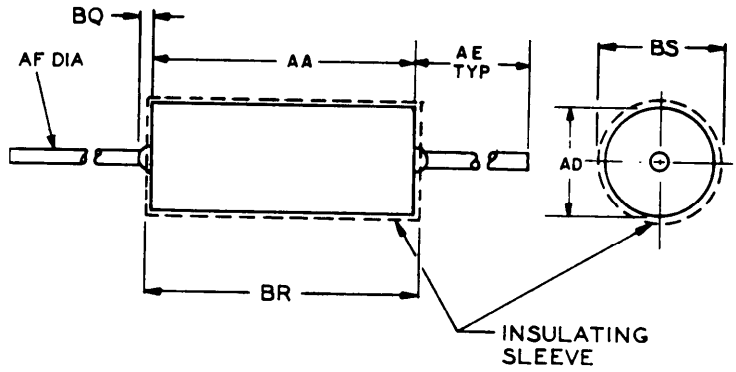

003-09-1

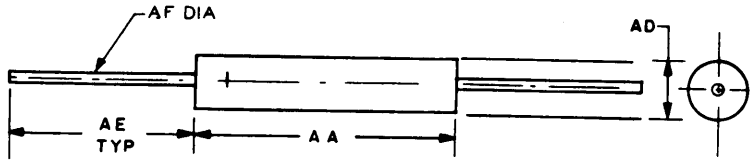


003-09-2

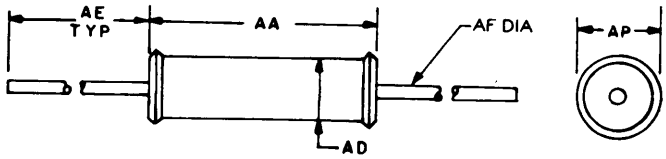


003-09-3


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

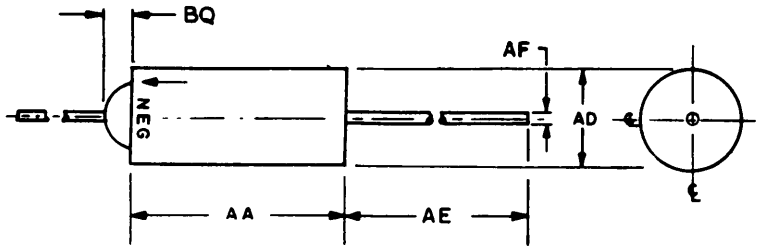

003-09-4

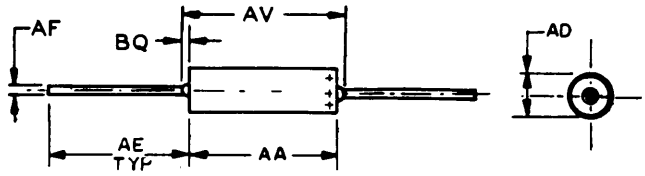


003-09-5

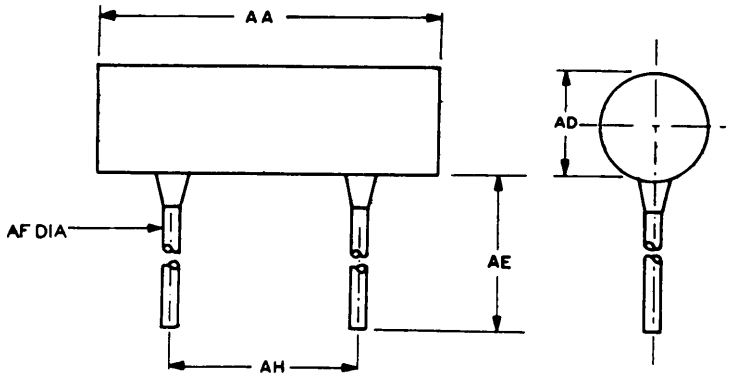


003-09-6


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

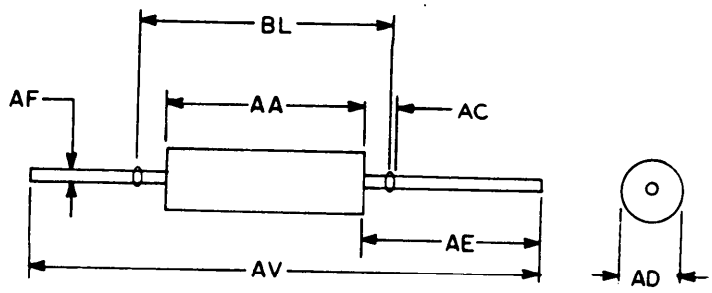

003-09-7

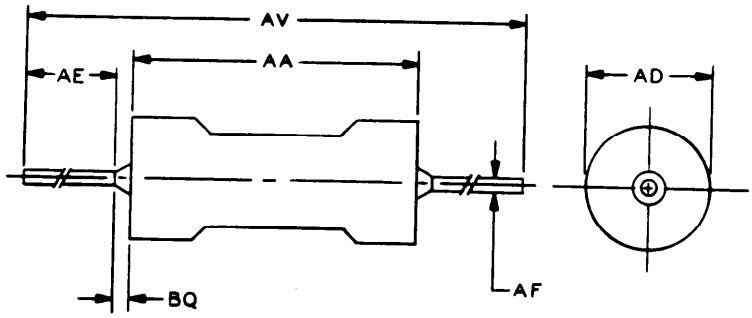


003-09-8

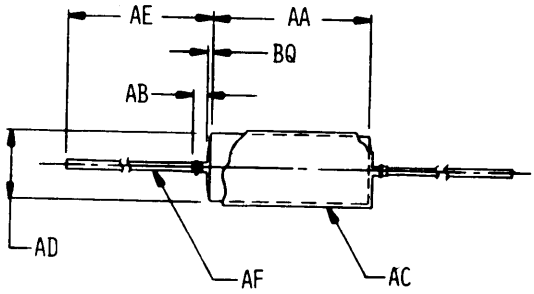


003-09-9


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

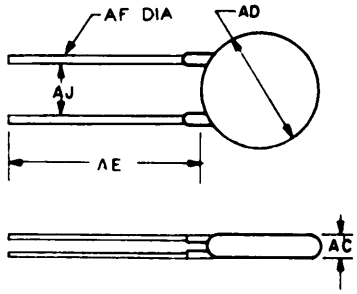

003-10-1

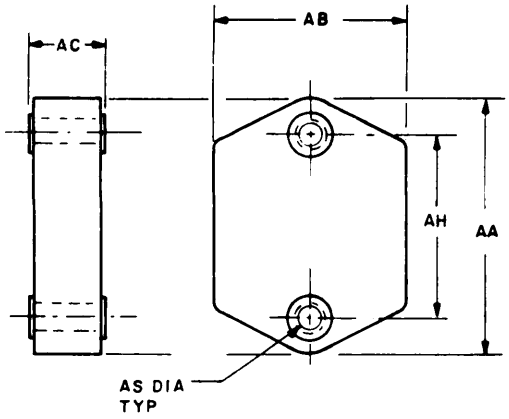


003-11-1

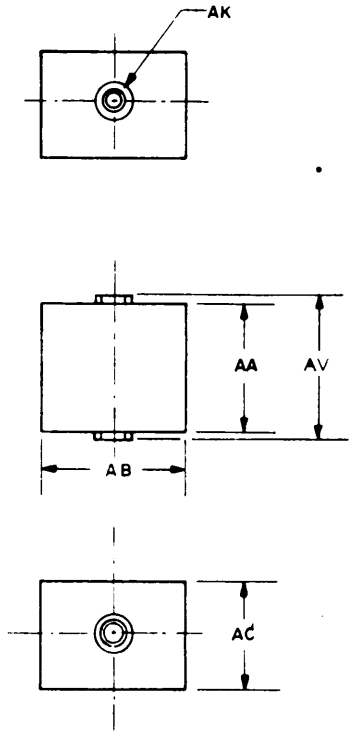


003-11-2


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

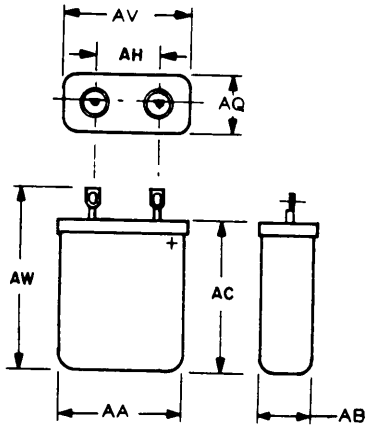


003-12-1

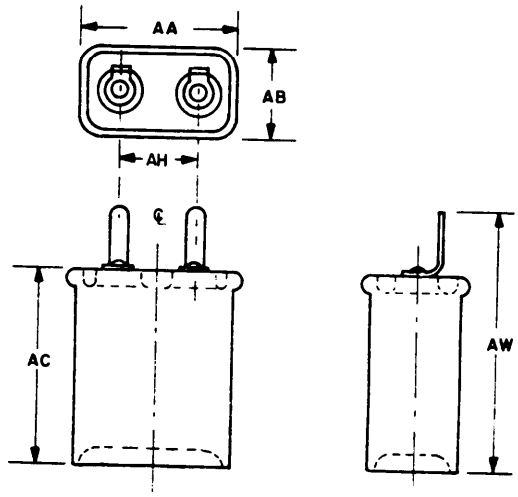

003-12-2

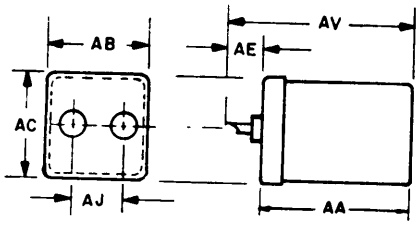


003-12-3

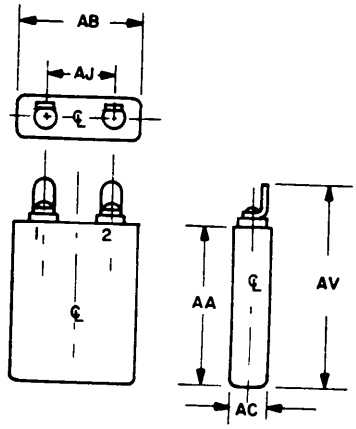


003-12-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

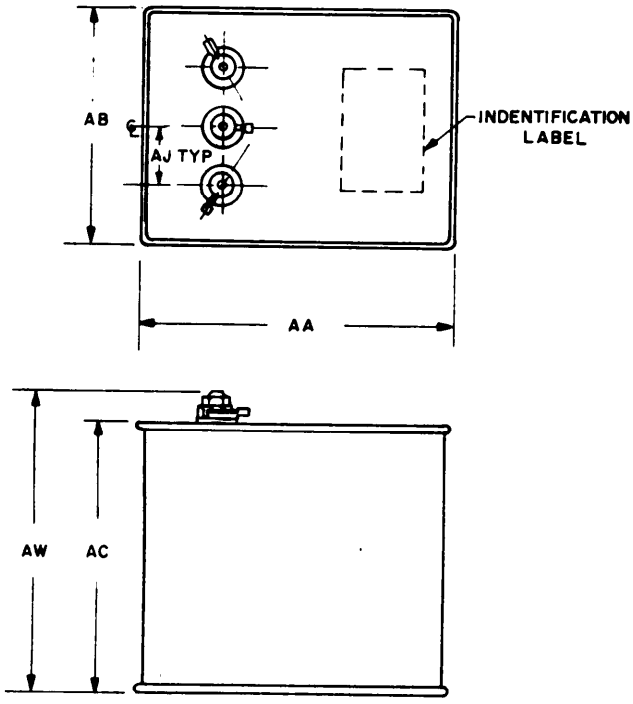


003-12-5

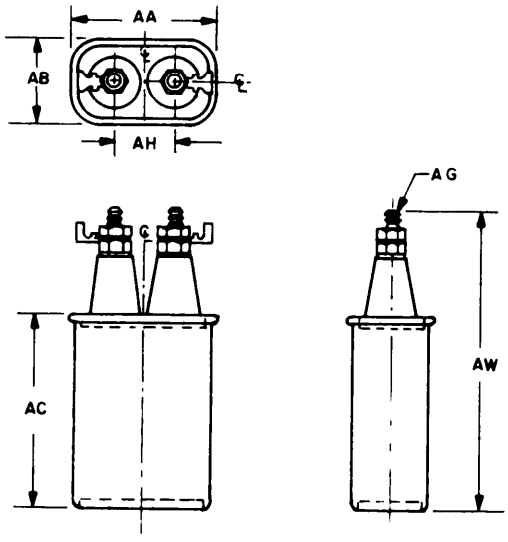


003-12-6

Source: https://assist.dla.mil -- Downloaded: 20261O-26T07:23Z
Check the source to verify that this is the current version before use.

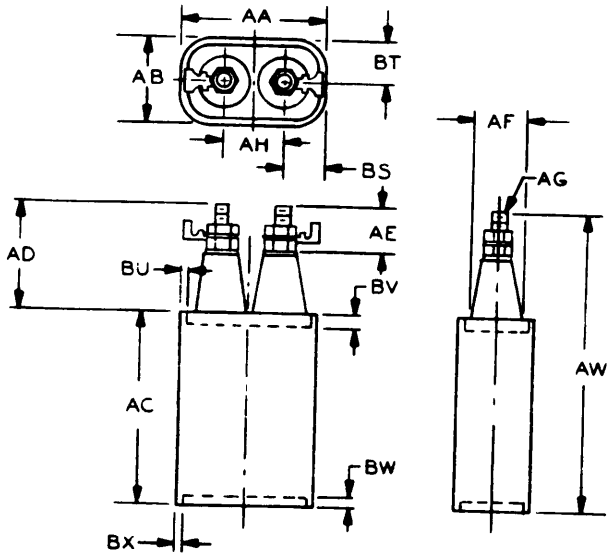


003-12-7

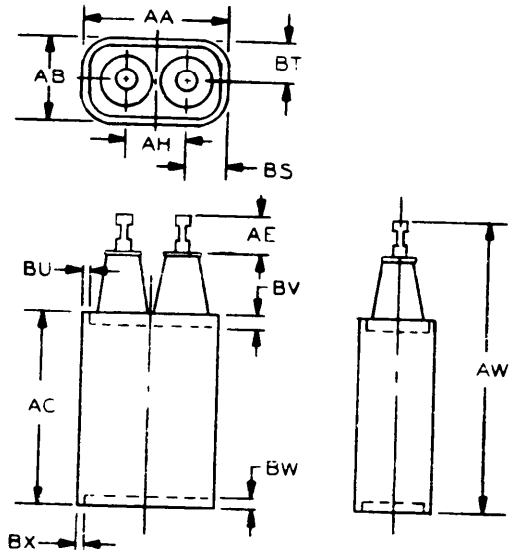


003-12-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

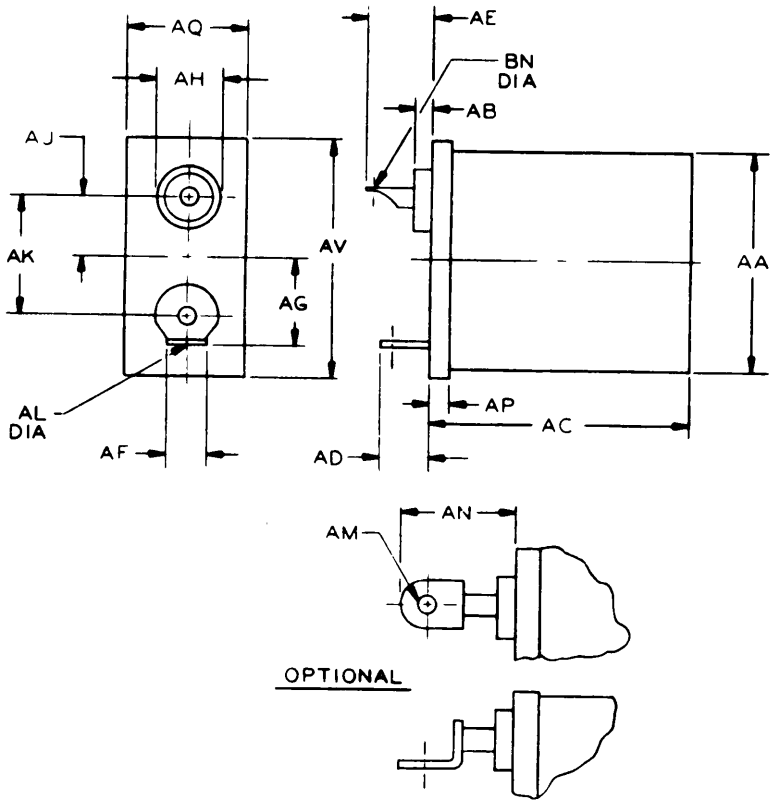


003-12-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

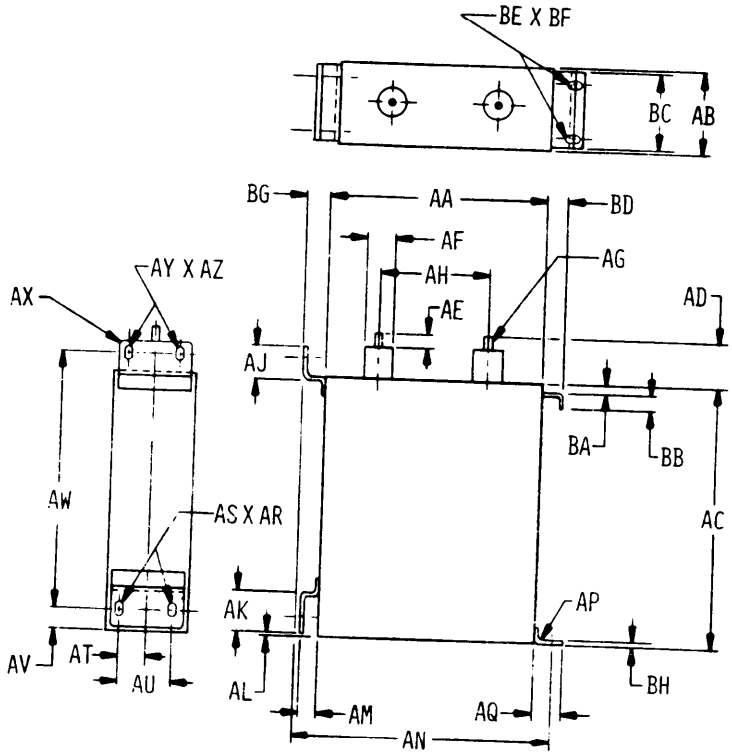


003-12-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

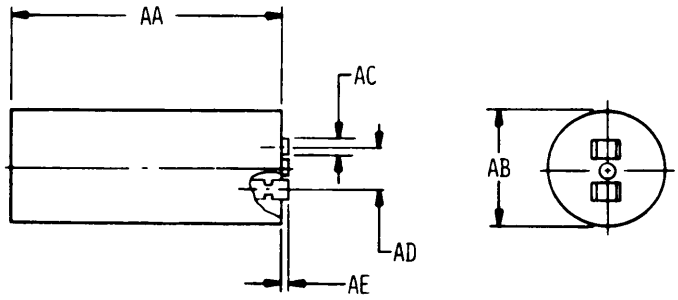


003-12-11

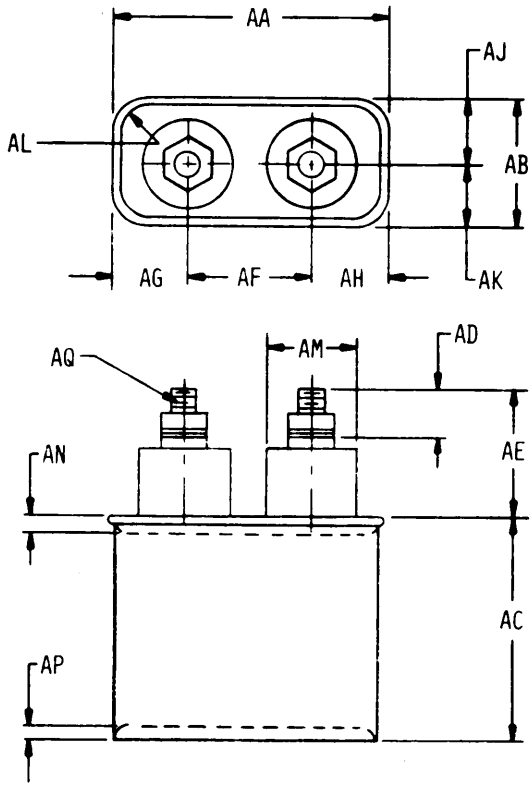


003-12-12


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

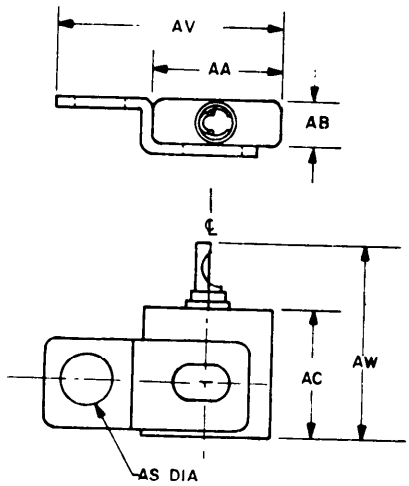


003-13-1

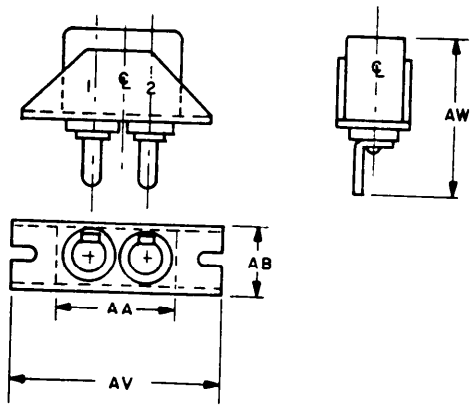

003-13-2

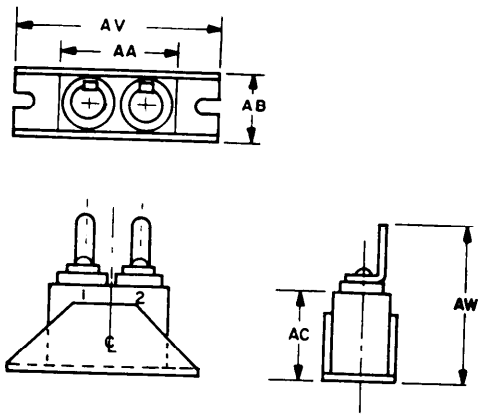


003-13-3

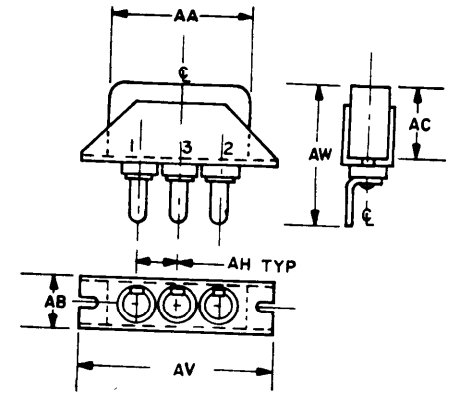


003-13-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

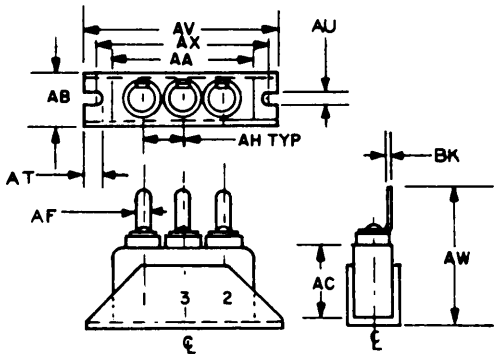


003-13-5

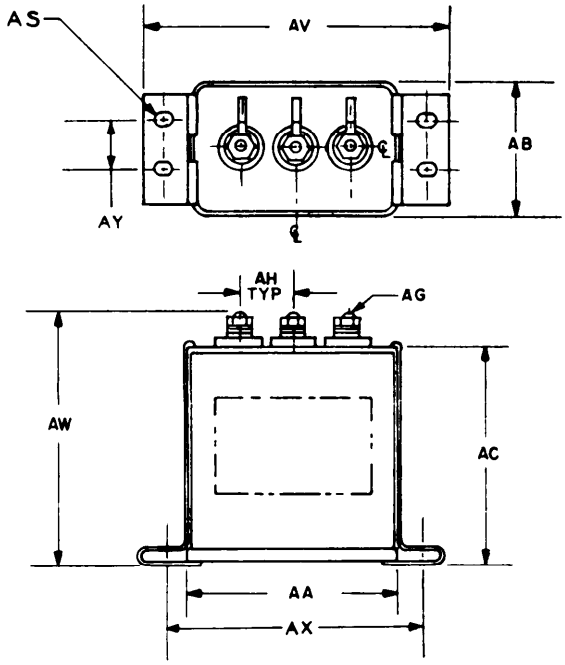


003-13-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

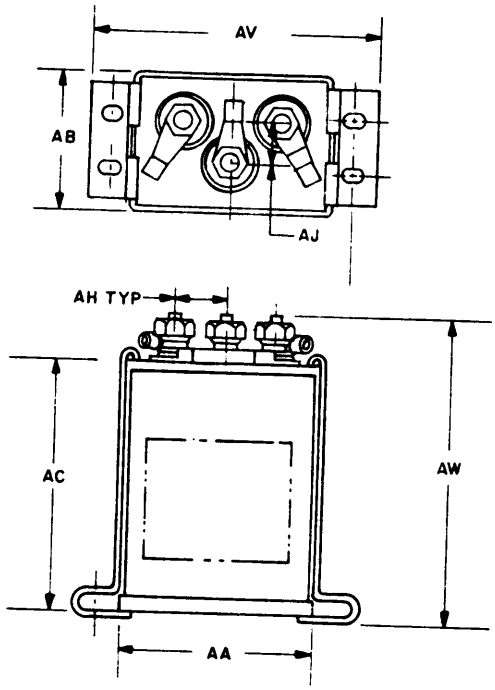


003-13-7

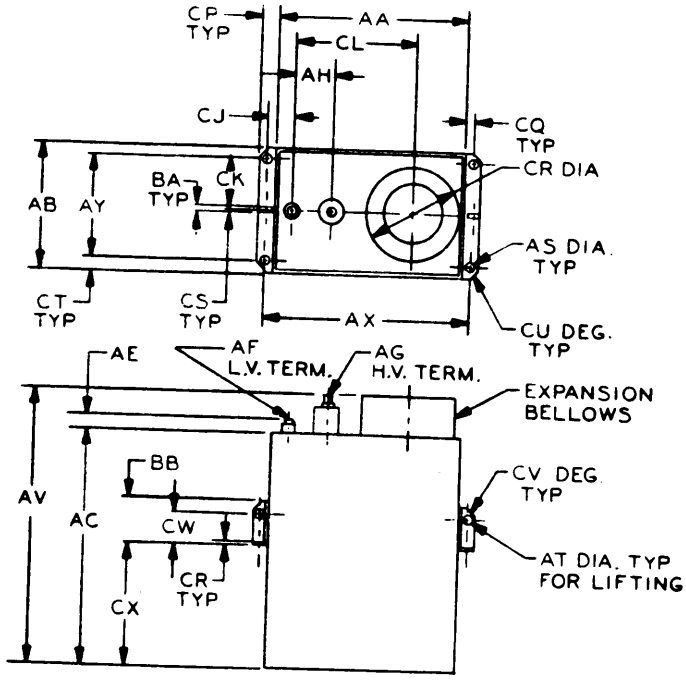


003-13-8


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

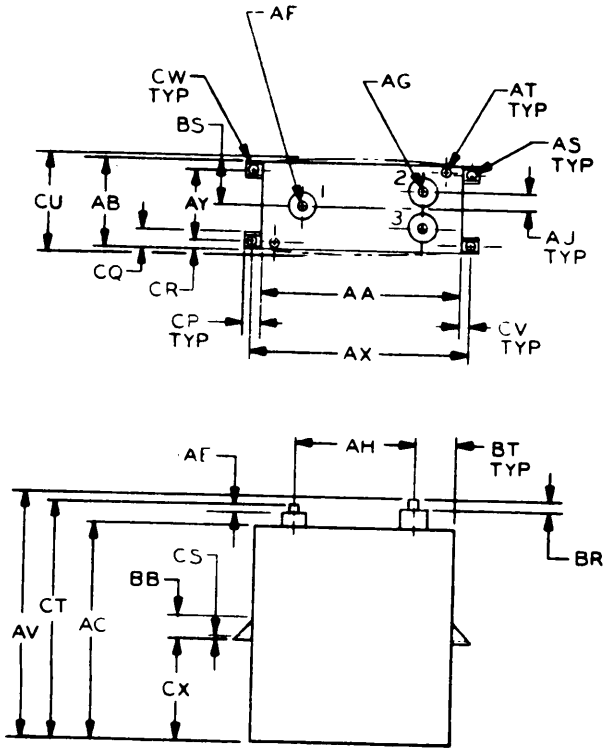


003-13-9


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

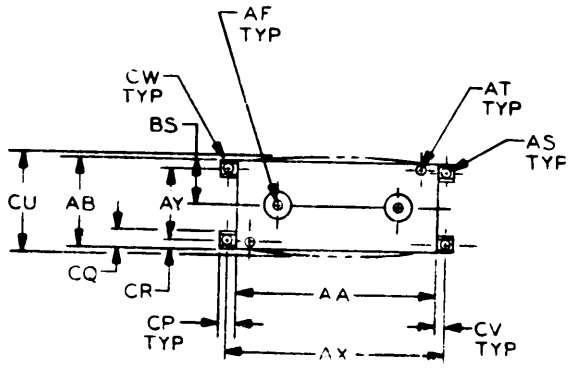

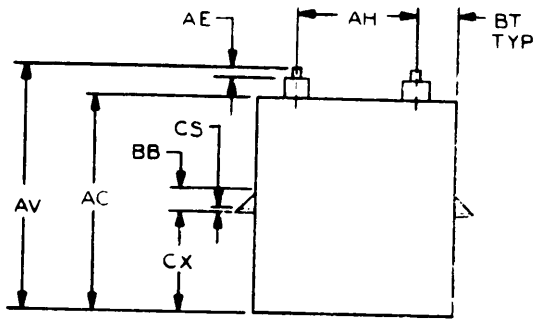


003-13-10

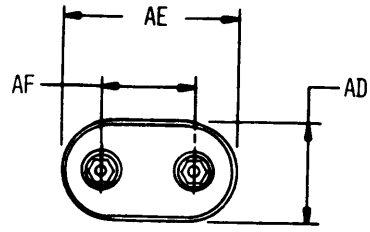

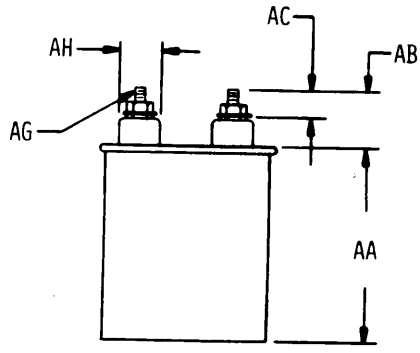


003-13-11


Source: https://assist.dla.mil -- Downloaded: 2026-01-26T07:23Z
Check the source to verify that this is the current version before use.




003-14-1




003-14-2




003-14-3

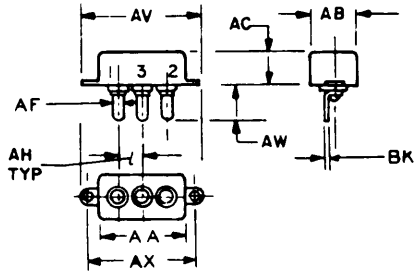

003-14-4

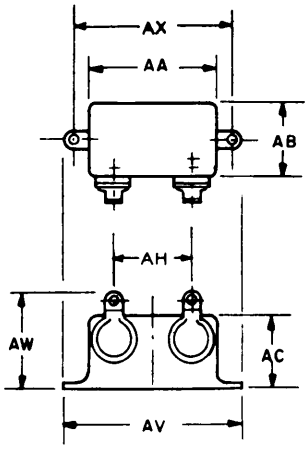


003-14-5

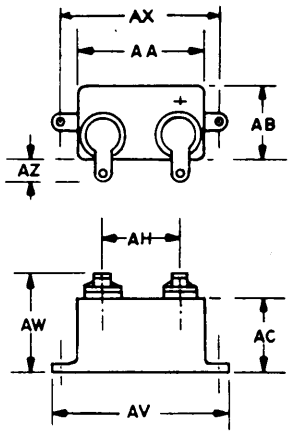


003-14-6


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

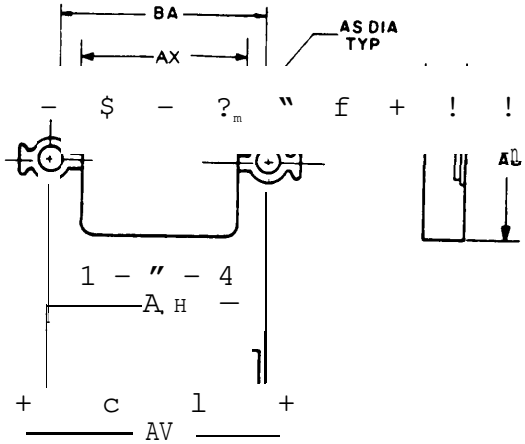


003-14-7

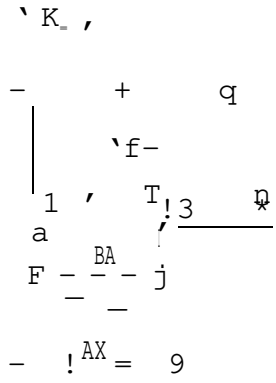


003-14-8

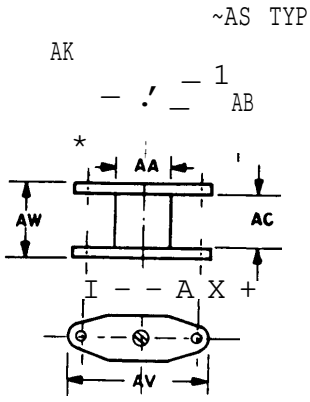


003-14-9

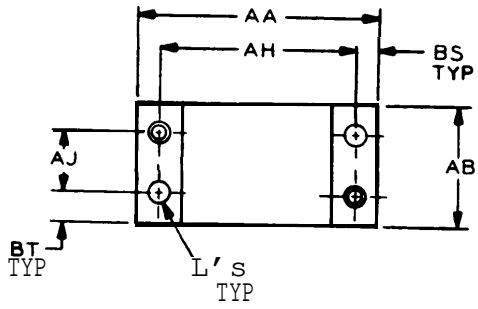

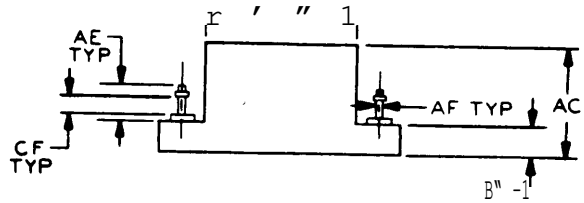


003-14-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

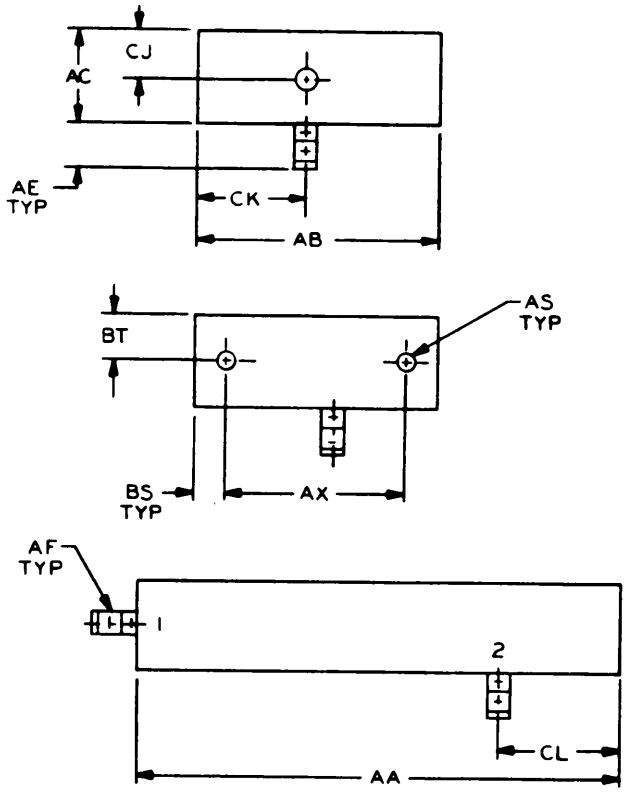


003-14-11

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

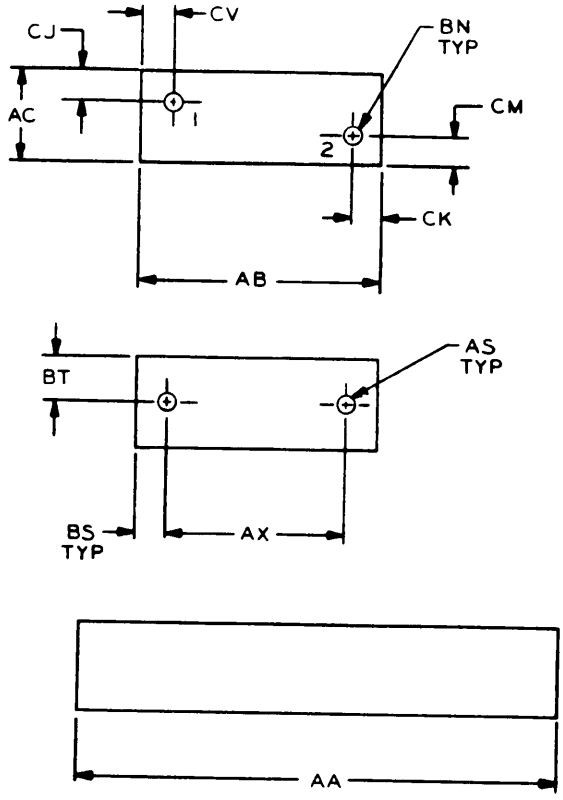


003-14-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

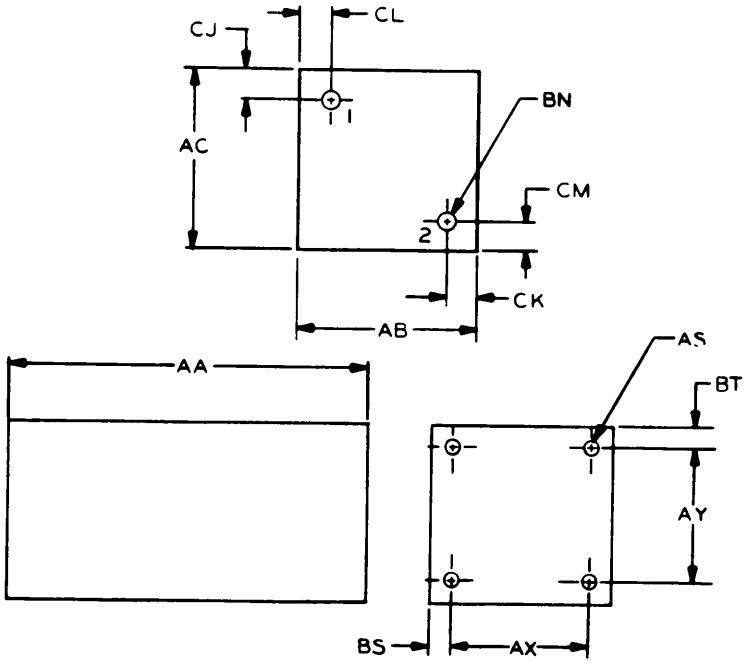


003-14-13

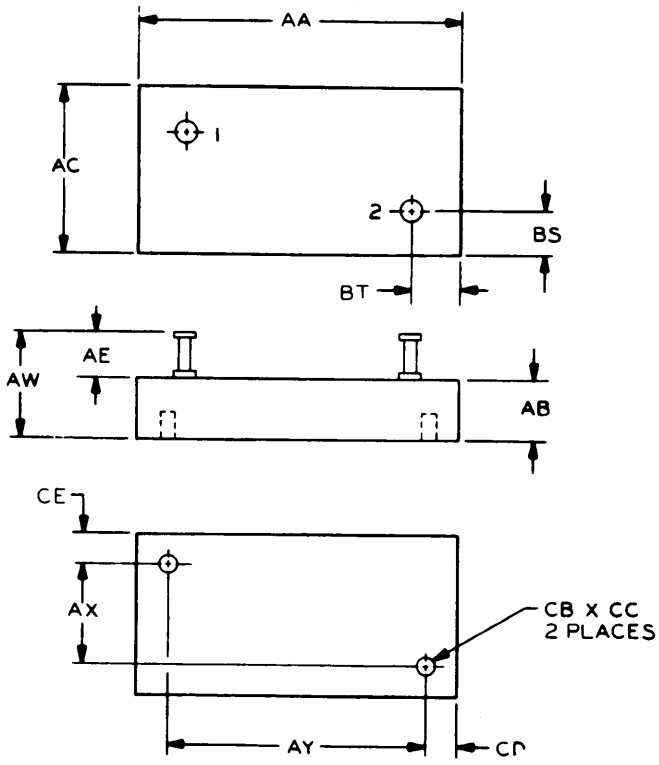


003-14-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

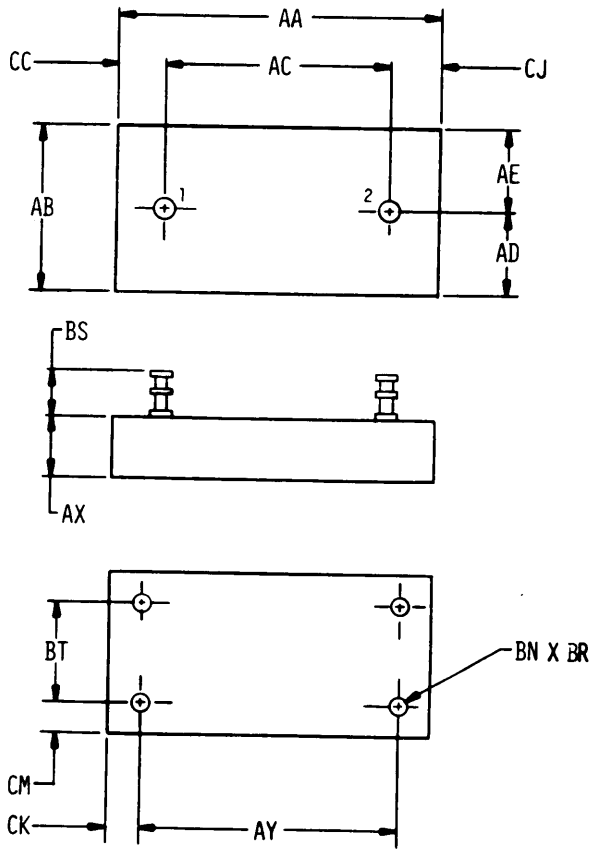


003-14-15


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

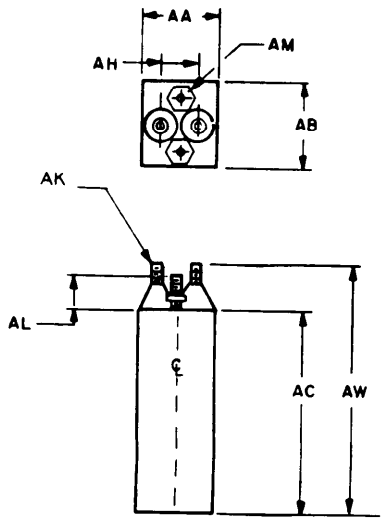


003-15-1

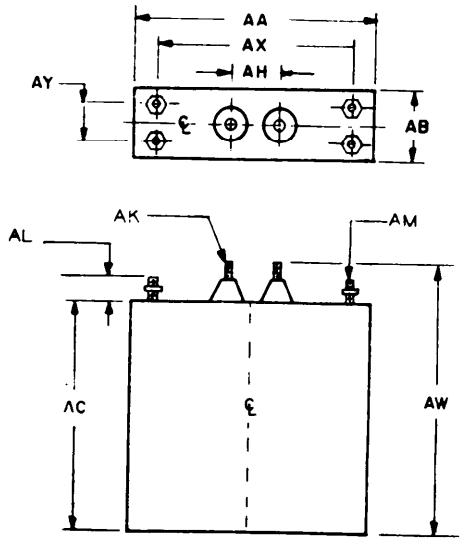

003-15-2

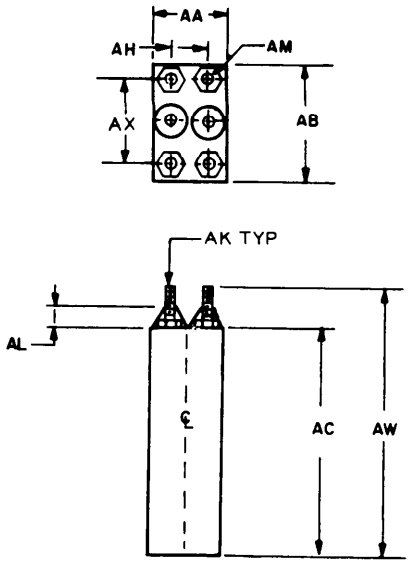


003-15-3

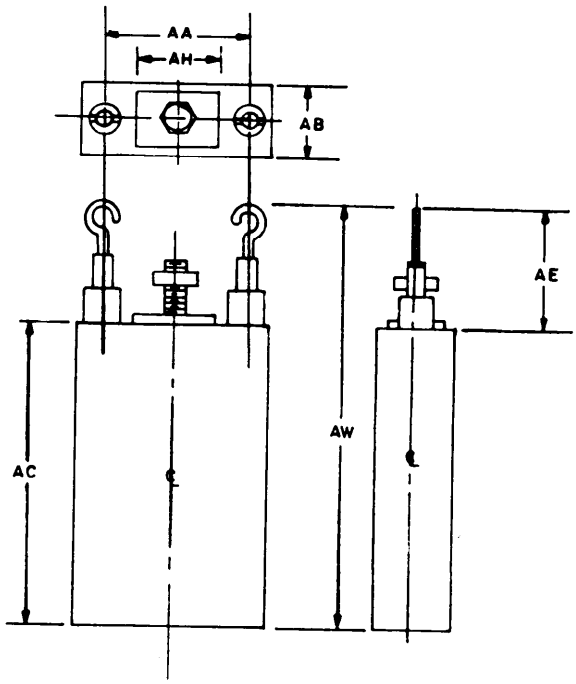


003-15-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

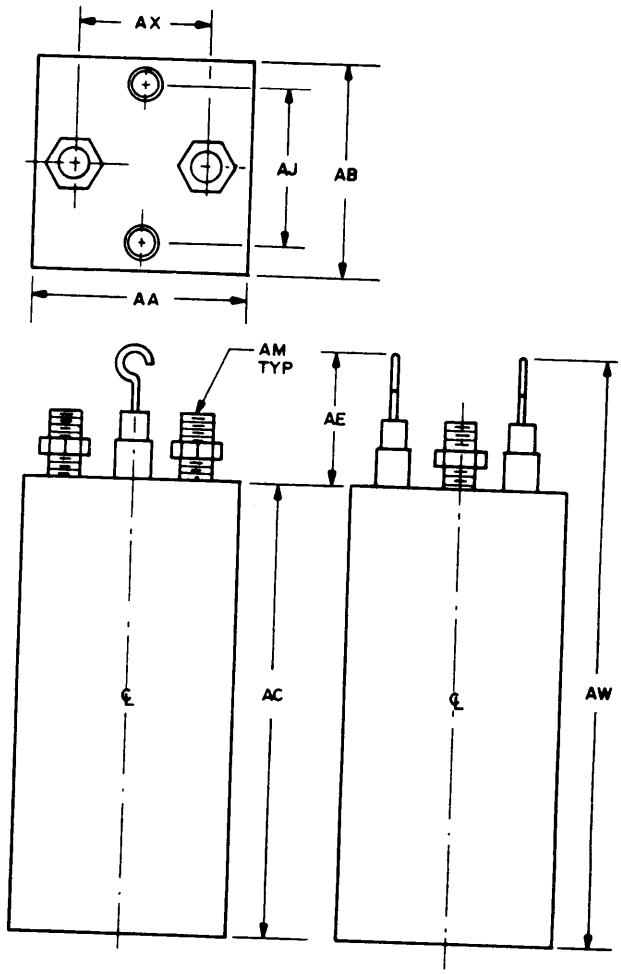


003-15-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

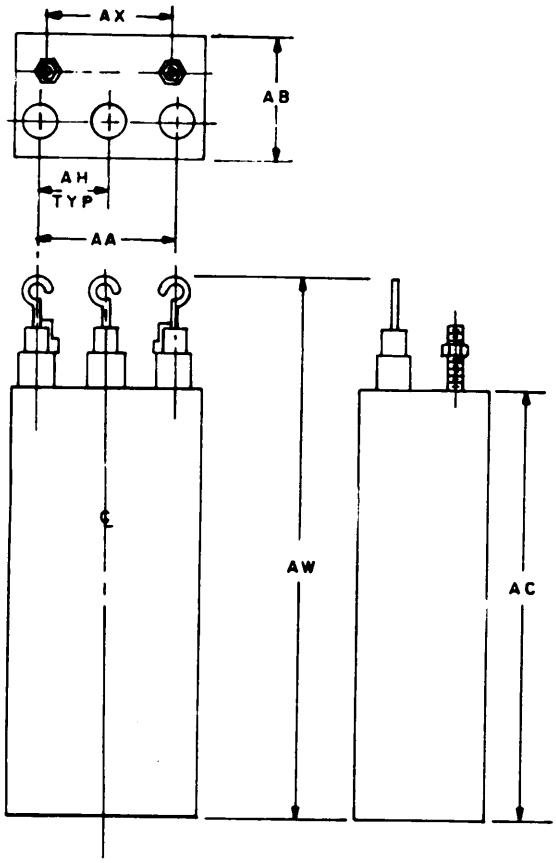


003-15-6

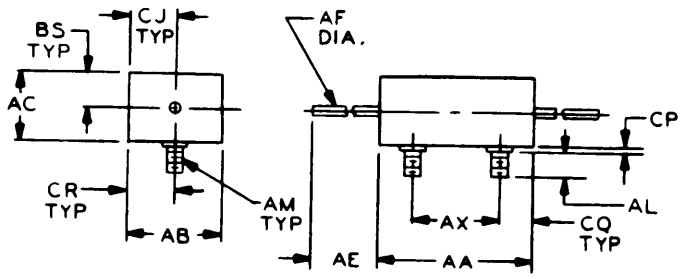

003-15-7


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

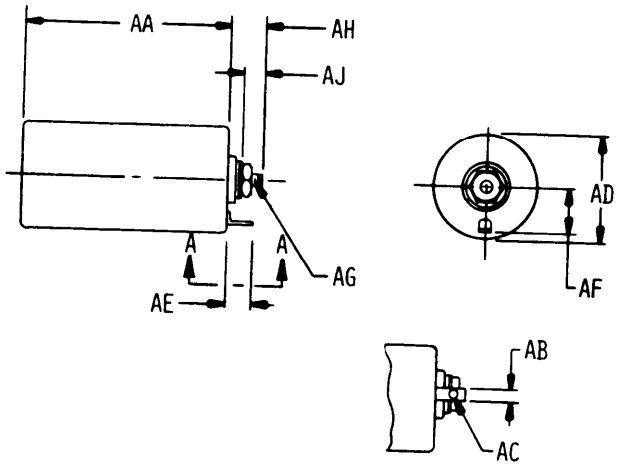


VIEW A-A

003-15-8


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

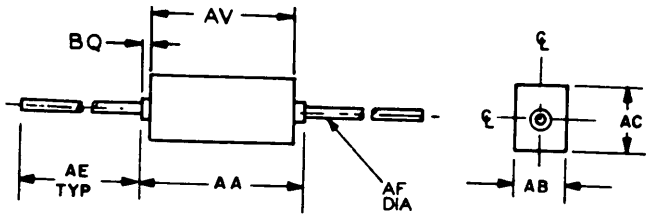

003-16-1

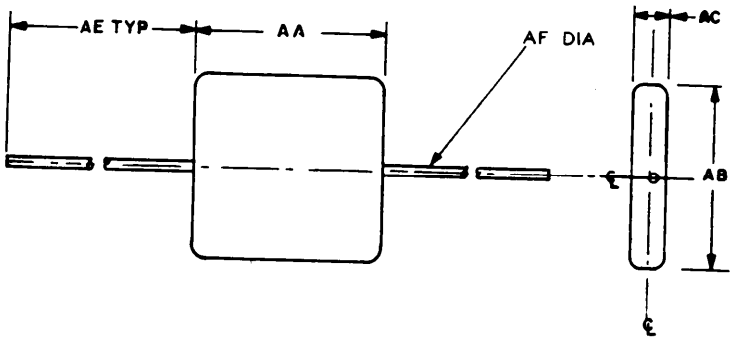


003-16-2

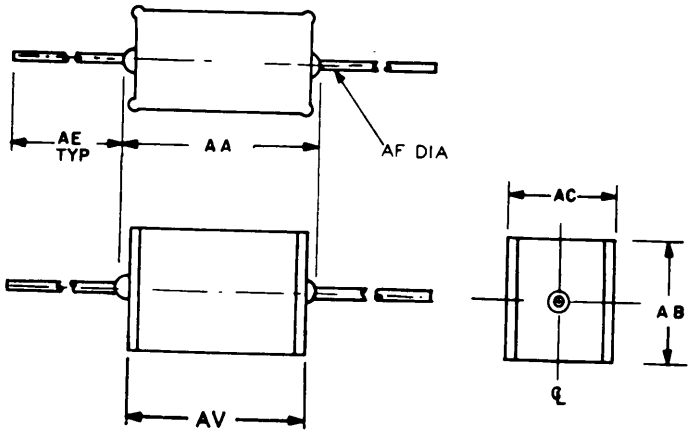


003-16-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

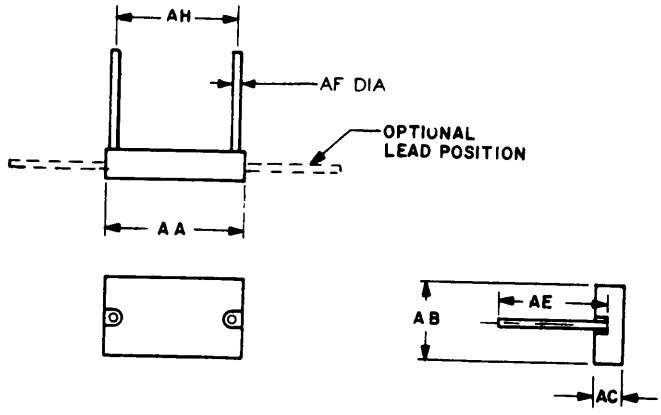


003-16-4

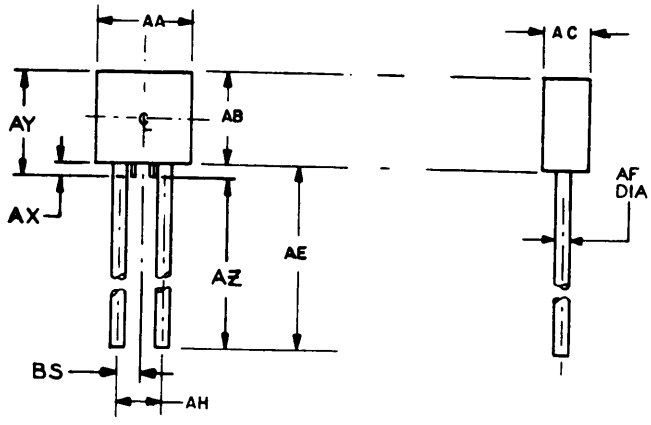


003-16-5


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

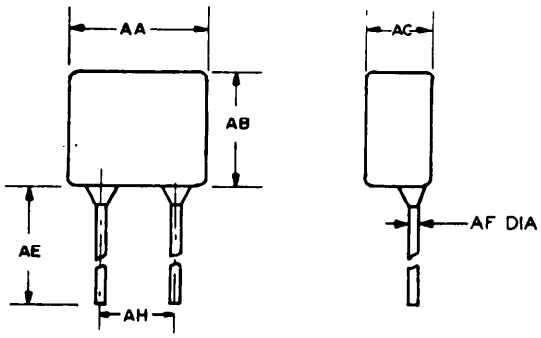


003-16-6

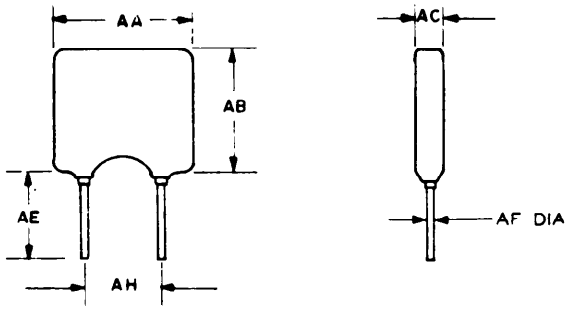

003-16-7

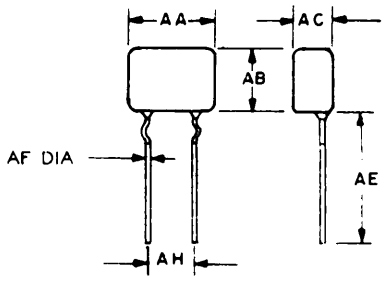


003-16-8

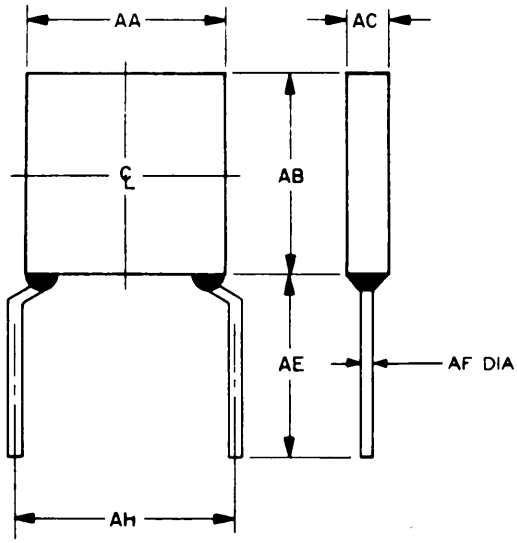


003-16-9


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

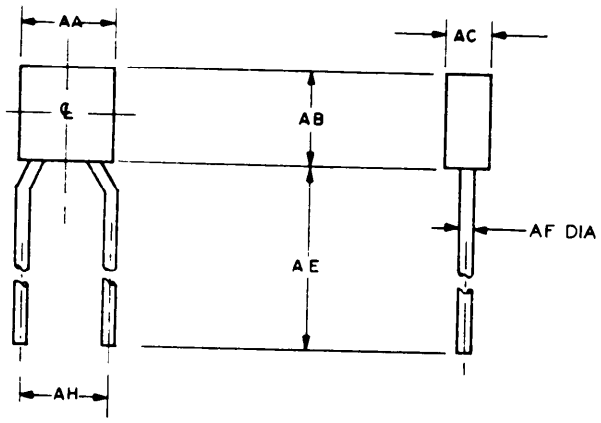


003-16-10

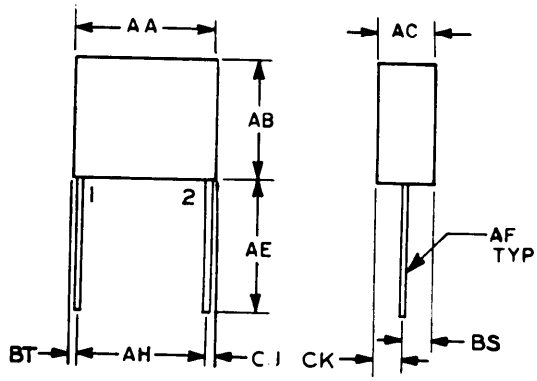

003-16-11

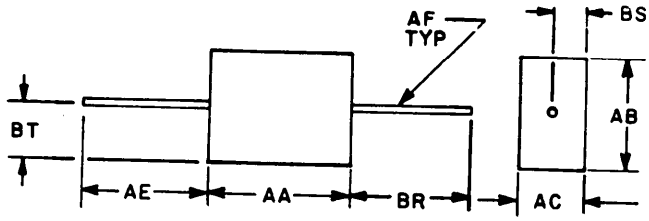


003-16-12

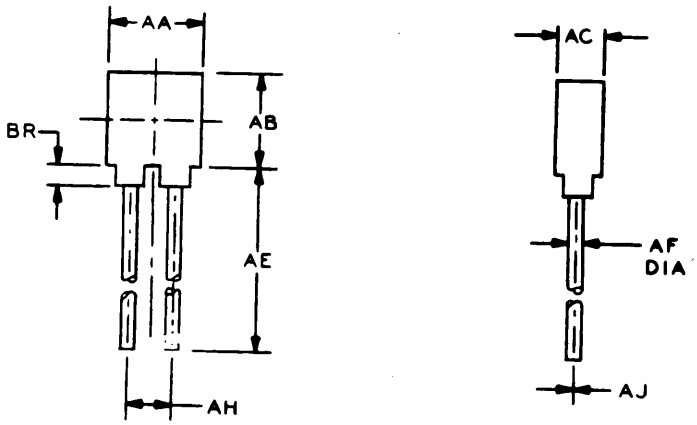


003-16-13

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

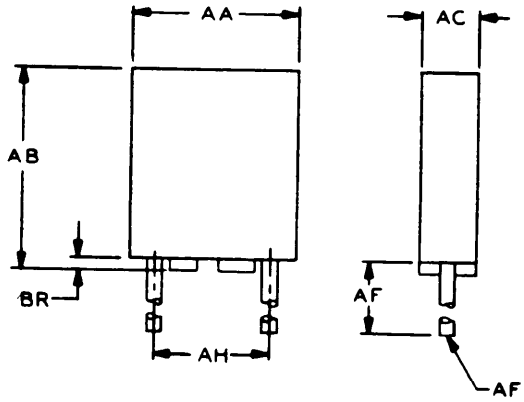


003-16-14

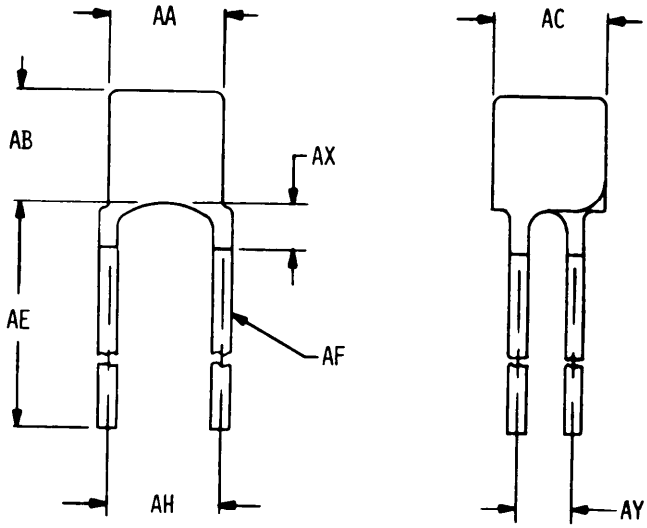



003-16-15

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

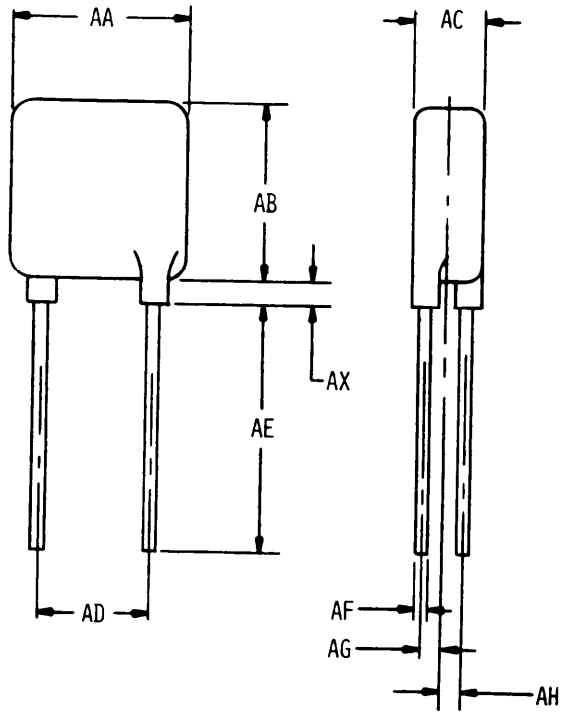



003-16-16

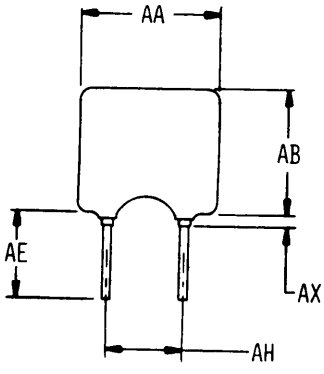




003-16-17






003-16-18


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

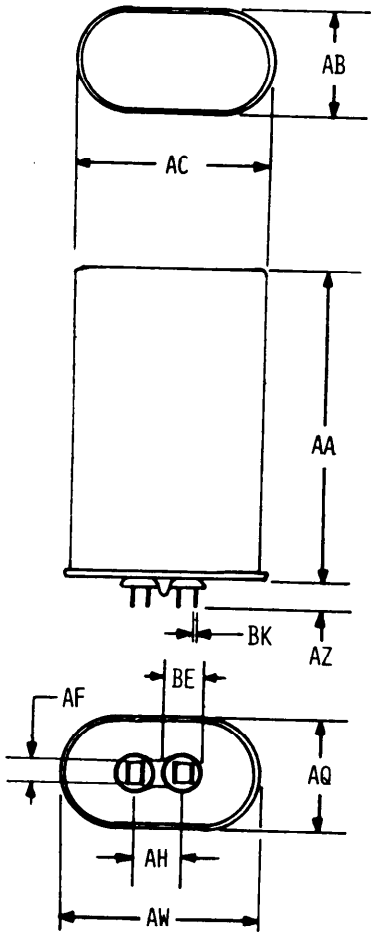

003-17-1

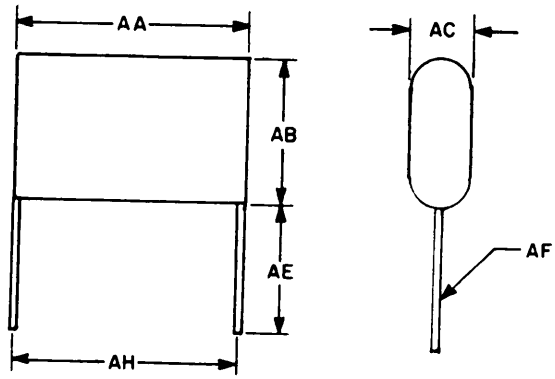


003-17-2

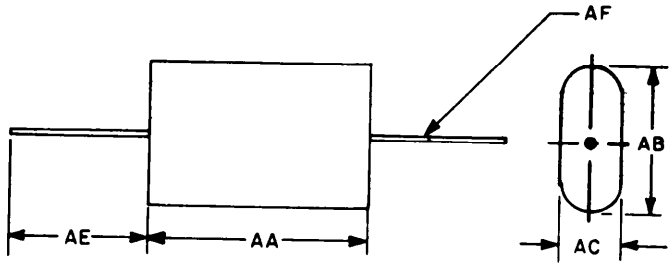


003-17-3


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

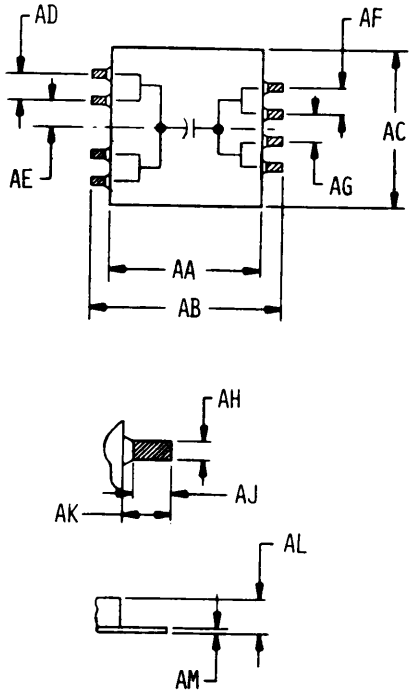


003-17-4

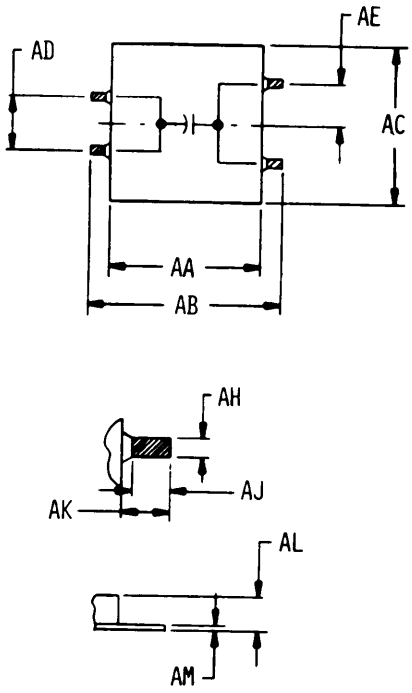

003-17-5

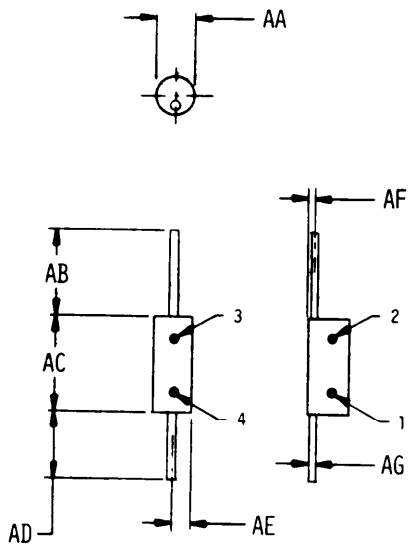


003-17-6

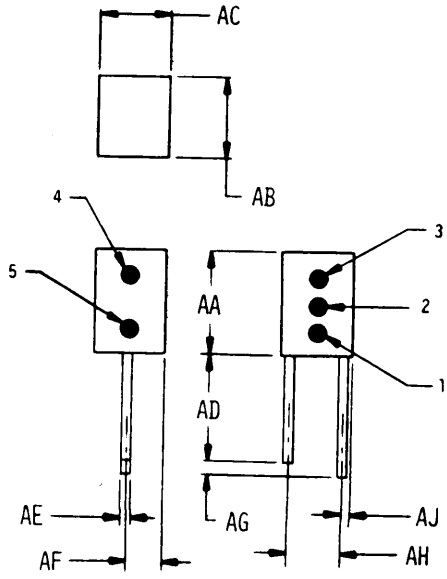


003-17-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

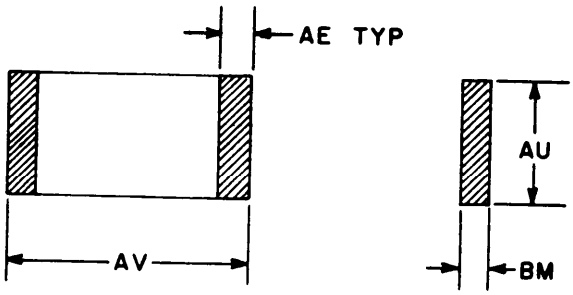


003-18-1

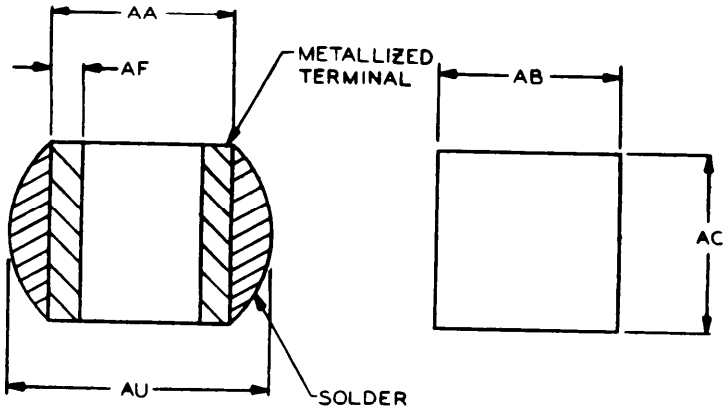


003-18-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

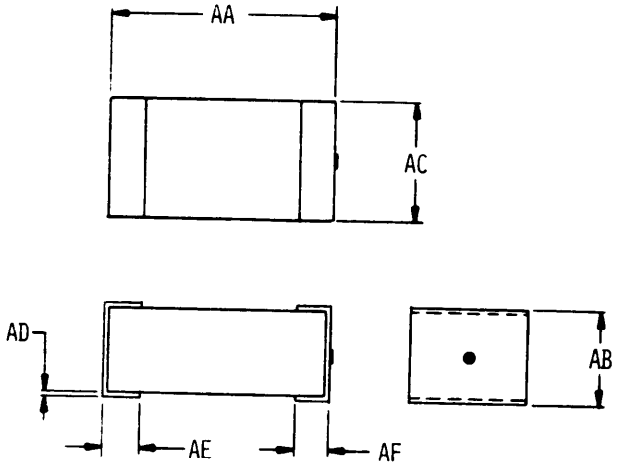


003-18-3

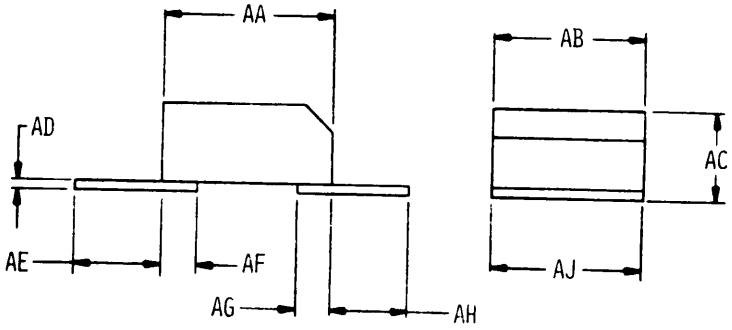


003-18-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

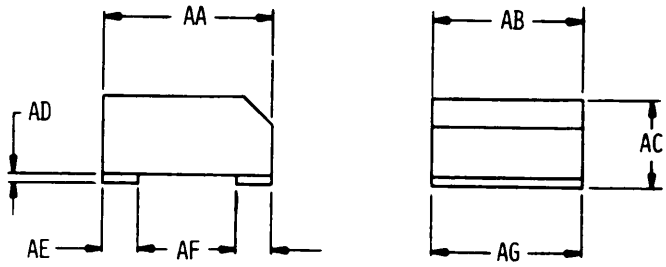


003-18-5

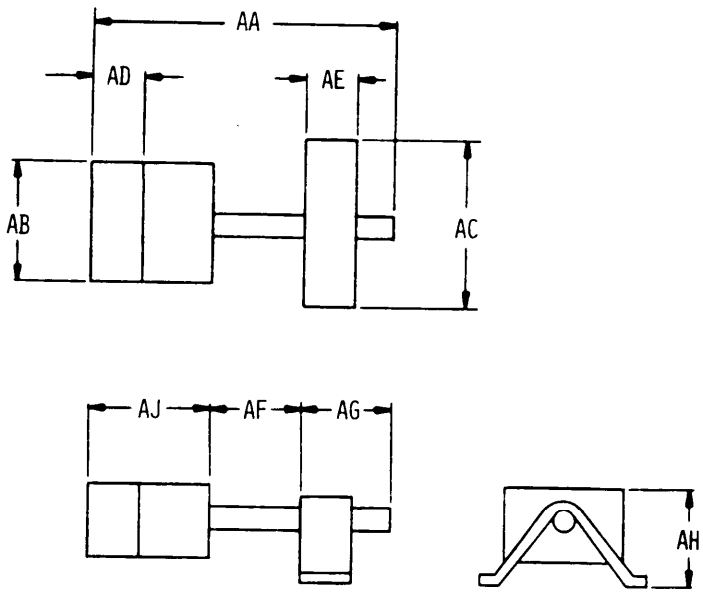


003-18-6


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

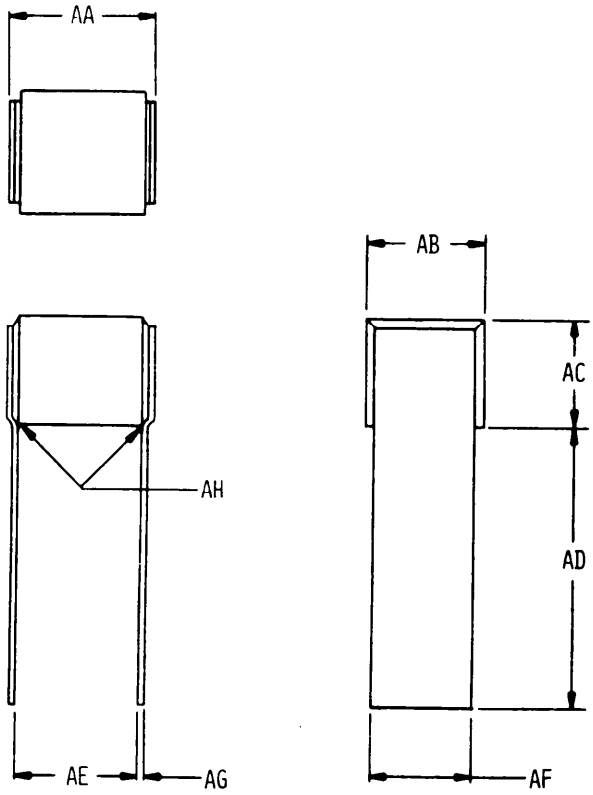

003-18-7

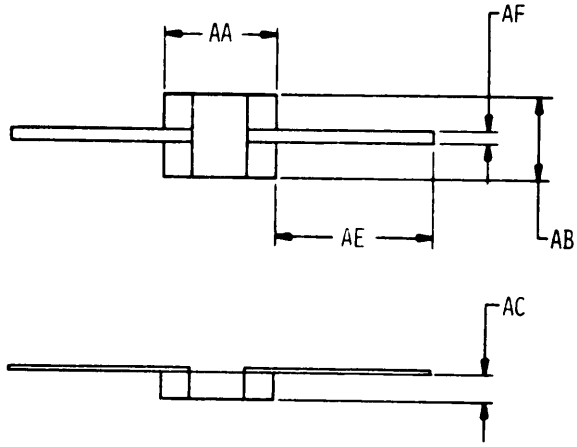


003-18-8

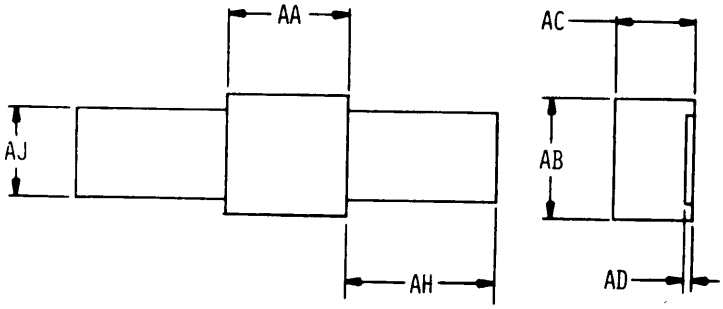


003-18-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

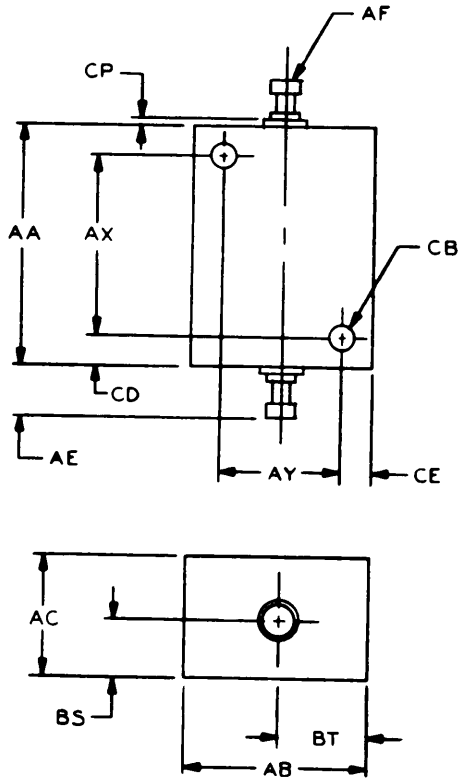


003-19-1

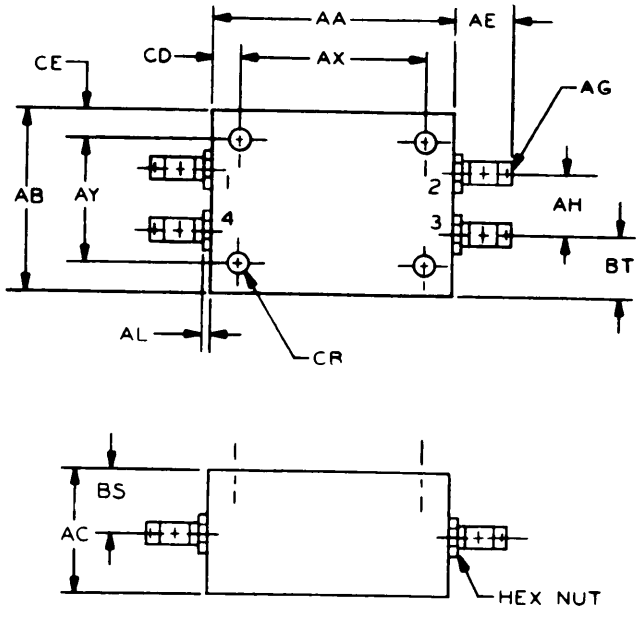


003-19-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

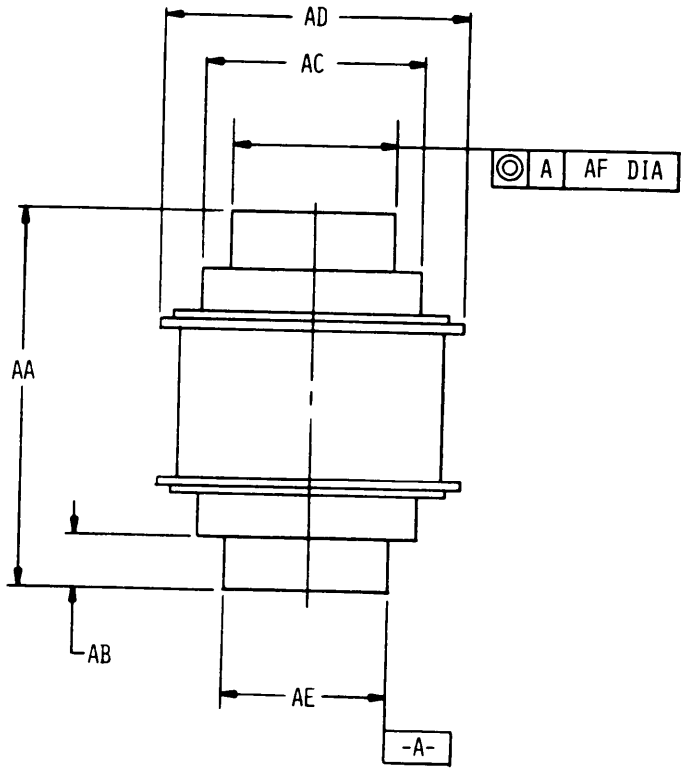


003-19-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

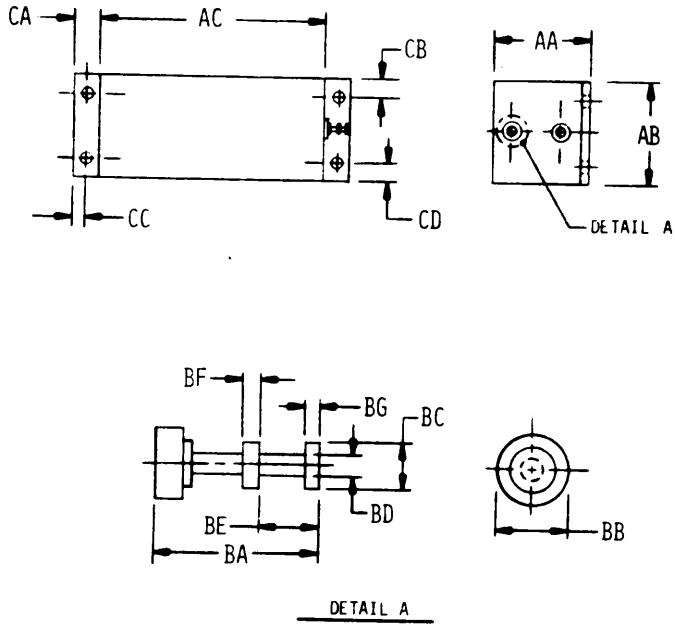


003-19-4

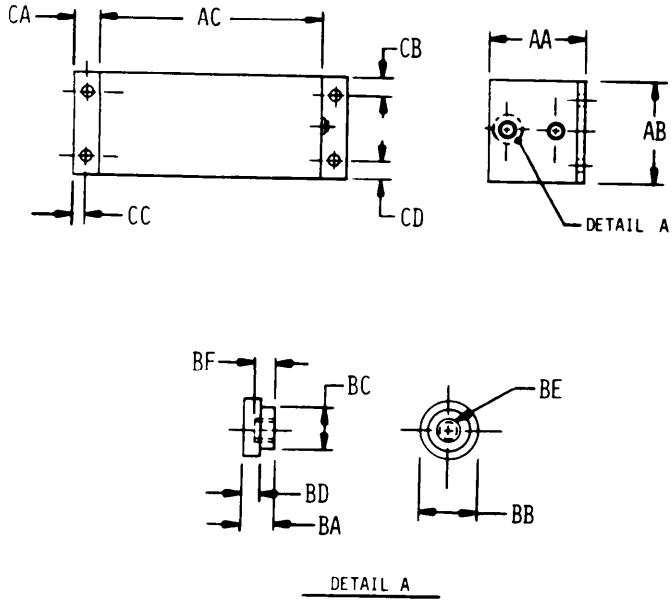


003-19-5


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

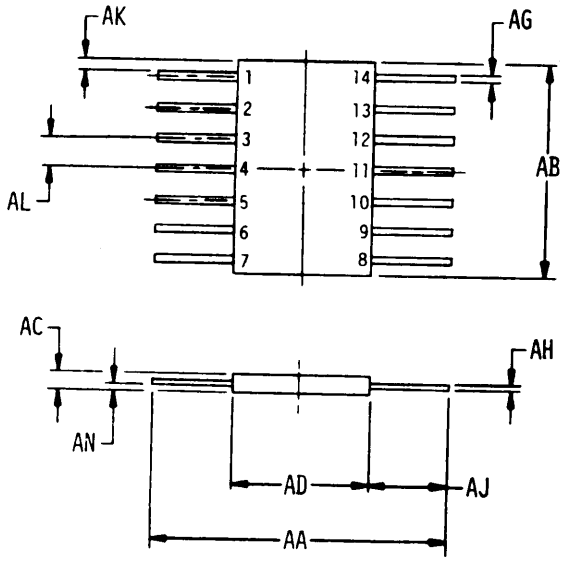


003-20-1

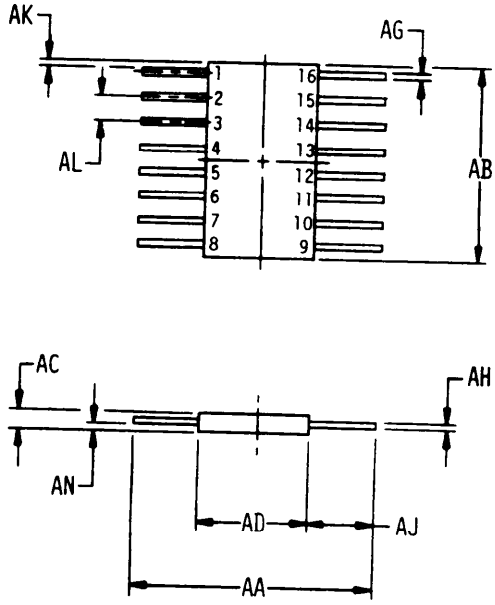

003-20-2

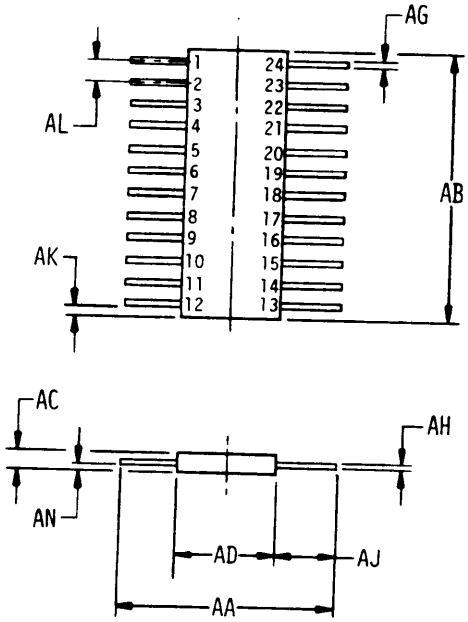


003-20-3

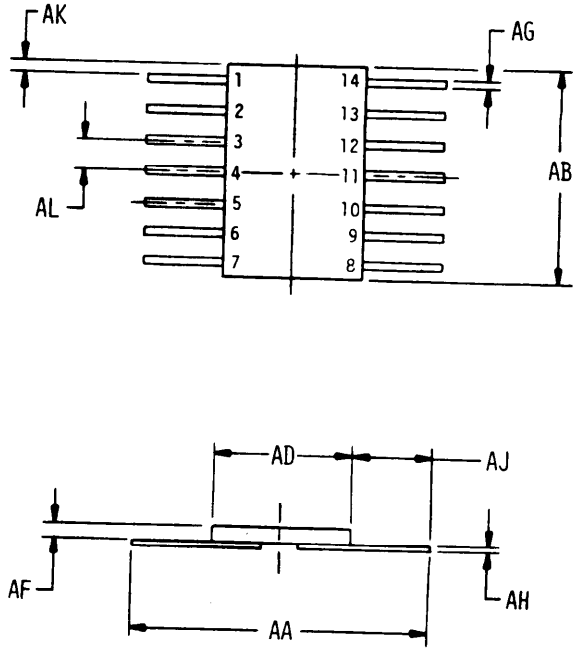


003-20-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

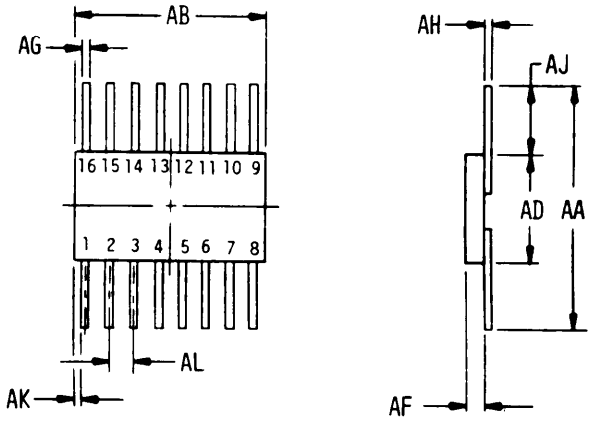


003-20-5

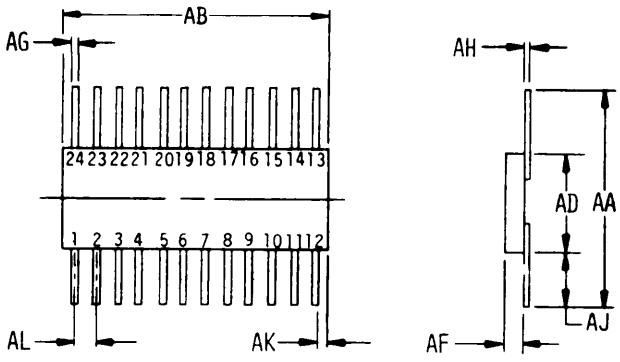


003-20-6


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

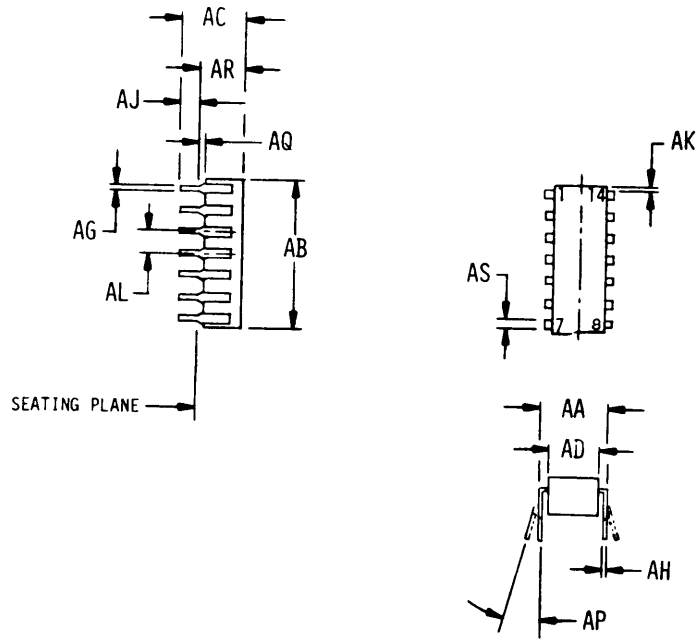

003-20-7

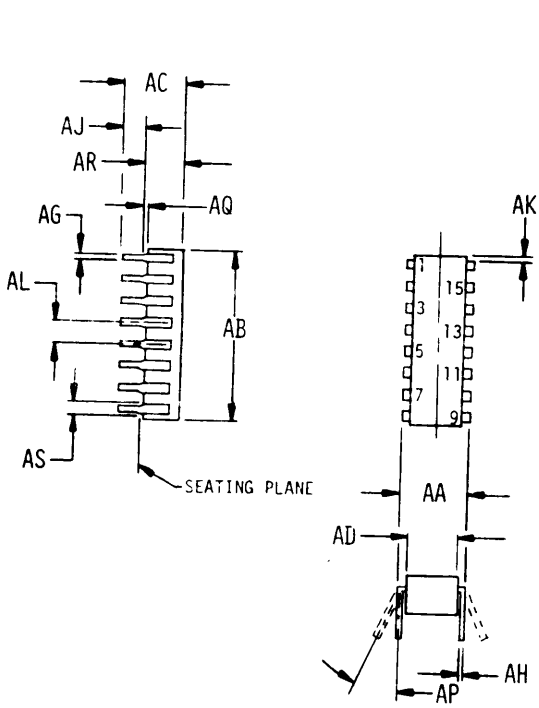


003-20-8

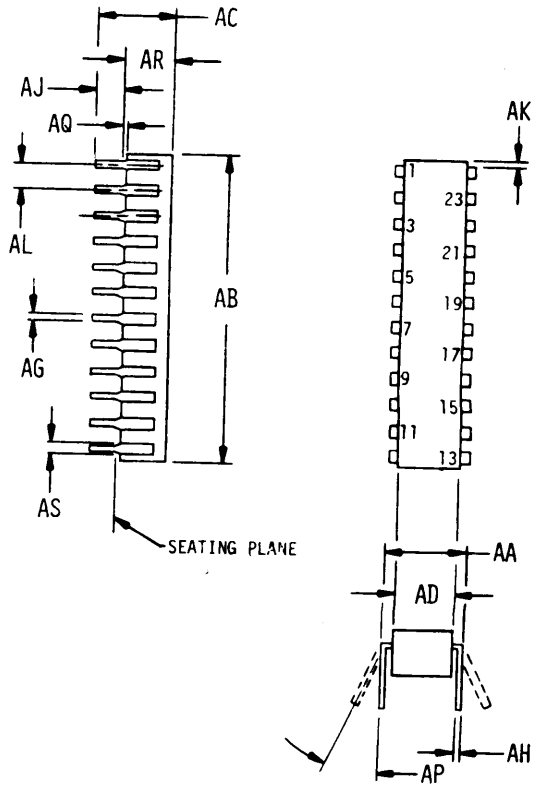


003-20-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

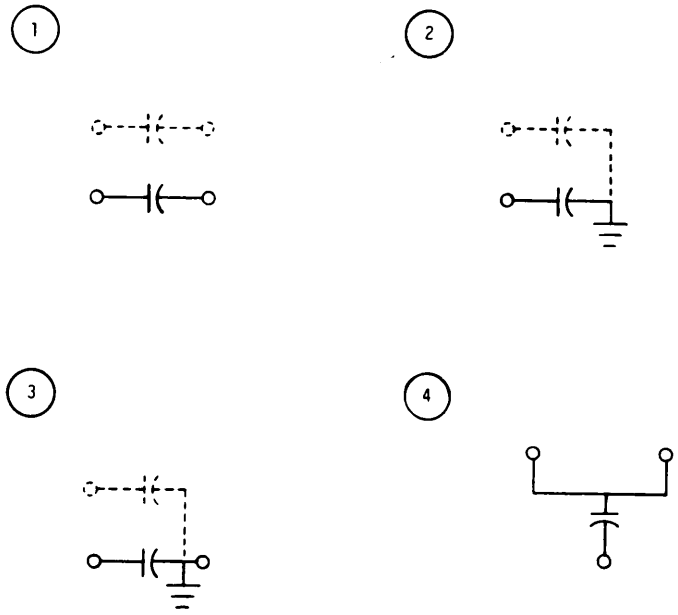


003-21-1

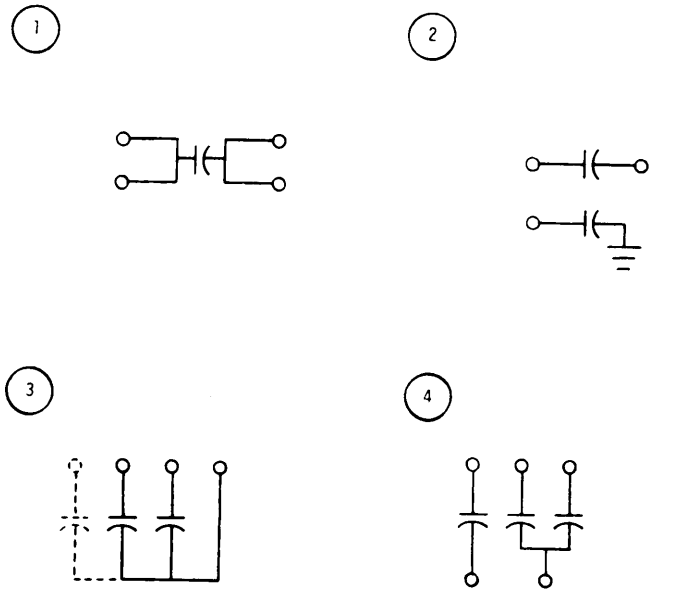


003-21-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

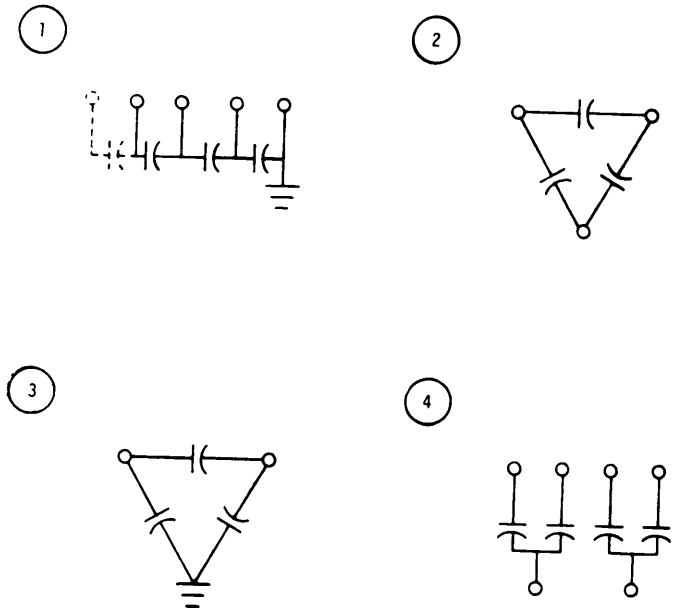


003-21-3

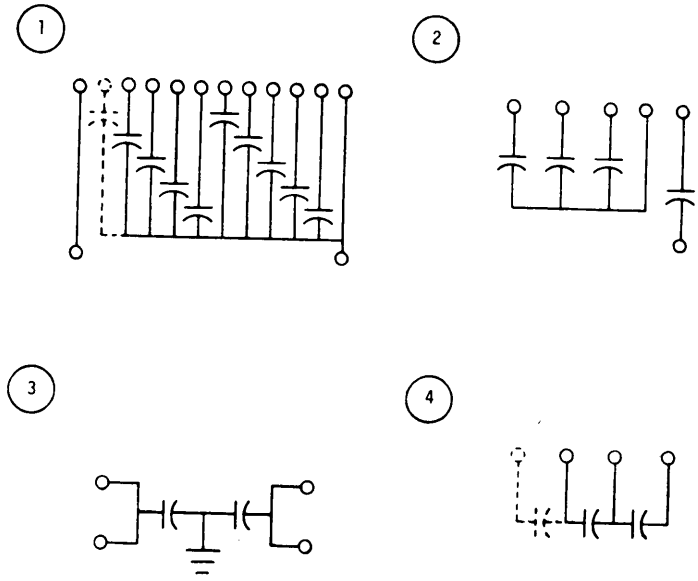


003-21-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

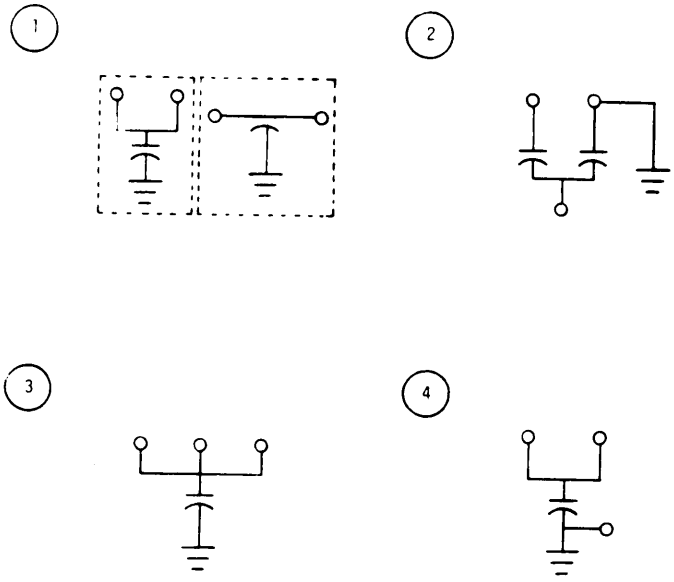

003-21-5

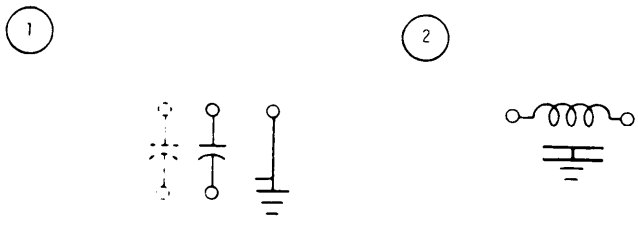

003-21-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX C

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	18	1414	154	Text	Text	Text	187
0102	18	1416	154	Text	Text	Text	10!!
0103	18	1418	152	Text	Text	Text	100
0104	18	1419	154	Text	Text	Text	1f!f)
0105	18	1420	Text	Text	Text	Text	100
0107	20	1421	Text	Text	Text	Text	~pv
0108	20	1426	Text	Text	Text	Text	100
0700	18	1427	Text	Text	Text	Text	187
0800	18	1428	Text	Text	Text	Text	i76
1003	18	1430	Text	Text	Text	Text	i76
1004	18	1431	Text	Text	Text	Text	1~7
1005	18	1432	Text	Text	Text	Text	36
1006	18	1433	Text	Text	Text	Text	~7fl
1008	18	1435	Text	Text	Text	Text	17 f.?
1009	22	1436	Text	Text	Text	Text	172
1371	84	1438	Text	Text	Text	Text	172
1372	86	1439	Text	Text	Text	Text	17?
1373	86	1446	Text	Text	Text	Text	170
1375	152	1447	Text	Text	Text	Text	17fl
1376	86	1448	Text	Text	Text	Text	170
1377	86	1452	Text	Text	Text	Text	?e
1374	86	1453	Text	Text	Text	Text	187
1380	84	1455	Text	Text	Text	Text	7s
1381	86	1456	Text	Text	Text	Text	7s
1383	86	1459	Text	Text	Text	Text	78
1384	84	1462	Text	Text	Text	Text	17~
1386	187	1466	Text	Text	Text	Text	176
1387	84	1467	Text	Text	Text	Text	178
1384	84	1468	Text	Text	Text	Text	i76
1391	90	1470	Text	Text	Text	Text	176
1394	88	1475	Text	Text	Text	Text	176
1395	90	1476	Text	Text	Text	Text	102
1396	88	1477	Text	Text	Text	Text	ii12
1397	90	1478	Text	Text	Text	Text	178
1400	88	1482	Text	Text	Text	Text	44
1406	88	1486	Text	Text	Text	Text	b4
1410	152	1488	Text	Text	Text	Text	46
1411	154	1494	Text	Text	Text	Text	51'!
1412	154	1495	Text	Text	Text	Text	44
1413	154	1498	Text	Text	Text	Text	f+6

Source: https://assist.dla.mil -- Downloaded: 2026t0-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1655	58	Text		1756	178	1820	26
1657	5P	Text		1758	60	1821	152
1658	187	Text		1759	62	1822	152
1660	10?	Text		1770	72	1823	139
1662	10?	Text		1771	66	1824	84
1663	102	Text		1772	66	1825	86
1665	102	Text		1773	76	1826	170
1666	98	Text		1774	44	1827	179
1667	102	Text		1775	44	1828	168
1668	98	Text		1776	44	1829	168
1672	100	Text		1777	44	1830	174
1675	10C	Text		1778	66	1833	156
1677	58	Text		1779	88	1837	148
1678	60	Text		1780	122	1838	150
1679	78	1733	42	1781	44	1839	158
1681	11C	1734	40	1782	44	1840	162
1682	110	Text		1785	114	1842	148
1684	11C	Text		1786	42	1843	148
1687	78	1739	40	1787	116	1844	150
1688	78	Text		1788	42	1845	148
1689	112	Text		1789	68	1846	148
1690	112	Text		1795	68	1847	92
1691	78	Text		1799	118	1848	150
1692	102	Text		1800	108	1849	148
1693	78	Text		1801	108	1851	146
1694	78	Text		1802	108	1852	148
1696	22	Text		1803	108	1853	148
1697	40	Text		1804	150	1854	148
1698	100	Text		1807	150	1855	148
1699	10C	Text		1808	150	1856	146
1700	100	1753	168	1809	150	1858	146
1701	102	1755	60	1810	150	1859	146
1702	102	Text		1811	150	1860	146
1703	138	Text		1812	150	1861	146
1706	108	Text		1813	150	1862	146
1707	108	Text		1814	56	1863	146
1709	108	Text		1815	112	1864	146
1710	140	Text		1816	112	1865	146
1711	42	Text		1817	152	1866	146
1712	142	Text		1819	128	1867	146

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1869	144	1933	48	1976	92	2057	176
1870	144	1934	50	1977	92	2061	174
1871	144	1935	50	1978	90	2062	174
1872	144	1936	50	1981	172	2063	174
1873	144	1937	50	1982	172	2065	187
1876	144	1938	50	1984	172	2066	187
1877	142	1939	50	1985	174	2067	187
1878	142	1941	48	1987	36	2071	88
1880	142	1942	48	1988	36	2072	88
1881	144	1943	92	1990	34	2073	76
1882	142	1944	64	1991	36	2074	76
1883	144	1945	48	1992	36	2075	76
1884	144	1946	98	1993	64	2076	112
1885	142	1947	98	1994	64	2078	28
1886	144	1948	98	1995	64	2079	28
1888	142	1949	98	1996	80	2080	28
1889	64	1950	68	1997	82	2081	26
1891	64	1951	94	1998	82	2082	26
1893	64	1952	68	1999	82	2083	26
1894	66	1953	92	2000	82	2087	26
1895	66	1955	68	2001	172	2088	26
1896	66	1956	68	2002	94	2089	28
1897	64	1957	68	2020	22	2090	172
1898	64	1958	68	2021	22	2091	174
1907	152	1959	68	2022	22	2092	182
1908	132	1960	68	2023	22	2093	172
1909	88	1961	68	2031	82	2094	172
1911	80	1962	68	2032	82	2095	187
1912	80	1963	66	2041	80	2096	42
1913	80	1965	92	2043	80	2097	42
1915	82	1966	92	2044	80	2098	187
1916	82	1967	92	2046	80	2101	36
1917	82	1968	66	2047	80	2102	36
1918	82	1969	92	2049	78	2103	36
1919	82	1970	92	2051	174	2104	38
1920	82	1971	92	2052	80	2105	38
1923	82	1972	92	2053	174	2106	38
1924	82	1973	94	2054	174	2107	36
1930	48	1974	94	2055	176	2111	38
1932	48	1975	94	2056	176	2112	38

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2113	38	2168	164	2218	141	2258	141
2114	38	2169	52	2219	141	2259	141
2115	38	2170	55	2220	141	2260	141
2116	38	2171	55	2221	141	2261	141
2117	38	2172	164	2222	141	2262	141
2118	38	2174	94	2223	141	2263	141
2119	38	2175	94	2224	141	2264	141
2120	38	2176	94	2225	141	2265	141
2131	62	2177	94	2226	141	2266	141
2132	62	2178	95	2227	141	2267	141
2136	62	2179	96	2228	141	2268	141
2137	62	2180	95	2229	141	2269	141
2140	128	2181	95	2230	141	2270	141
2141	128	2182	95	2231	141	2271	141
2142	128	2184	95	2232	141	2272	141
2143	128	2185	94	2233	141	2293	138
2144	128	2186	95	2234	141	2294	138
2145	130	2187	96	2235	141	2295	138
2146	130	2188	96	2236	141	2296	52
2147	130	2189	95	2237	141	2299	134
2148	130	2190	95	2238	141	2301	137
2149	152	2191	95	2239	141	2302	137
2150	156	2200	140	2240	141	2303	137
2151	156	2201	141	2241	141	2304	137
2152	156	2202	141	2242	141	2305	137
2153	156	2203	141	2247	141	2306	137
2154	158	2204	141	2244	141	2307	137
2155	158	2205	141	2245	141	2308	137
2156	158	2206	141	2246	141	2309	137
2157	158	2207	141	2247	141	2310	137
2158	158	2208	141	2248	141	2311	137
2159	160	2209	141	2249	141	2313	137
2160	160	2210	141	2250	141	2314	137
2161	160	2211	141	2251	141	2315	137
2162	162	2212	141	2252	141	2316	137
2163	162	2213	141	2253	141	2317	137
2164	164	2214	141	2254	141	2318	137
2165	164	2215	141	2255	141	2319	137
2166	164	2216	141	2256	141	2320	137
2167	164	2217	141	2257	141	2321	137

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.
2322	137
2323	137
2325	137
2326	137
2327	137
2328	137
2329	137
2330	137
2331	137
2332	137
2333	137
2334	137
2335	137
2337	137
2338	137
2339	137
2340	137
2341	137
2342	137
2343	137
2344	237
2345	137
2346	137
2347	137
2349	137
2350	137
2351	137
2352	137
2353	137
2354	137
2355	137
2356	137
2357	137
2358	137
2359	137
2361	137
2362	137
2363	137
2364	137
2365	137
2366	137
2367	137
2368	137
2369	137
2370	137
2371	137
2373	137
2374	137
2375	137
2376	137
2377	137
2378	137
2379	137
2380	137
2381	137
2382	137
2383	137
2385	137
2386	137
2387	137
2388	137
2389	137
2390	137
2391	137
2392	137
2393	137
2394	137
2395	137
2397	137
2398	137
2399	137
2400	137
2401	137
2402	137
2403	137
2404	137
2405	137
2406	137
2407	137
2409	137
2410	137
2411	137
2412	137
2413	137
2414	137
2415	137
2416	137
2417	137
2418	137
2419	137
2421	137
2422	137
2423	137
2424	137
2425	137
2426	137
2427	137
2428	137
2429	137
2430	137
2431	137
2433	137
2434	137
2435	137
2436	137
2437	137
2438	137
2439	137
2440	137
2441	137
2442	137
2443	137
2445	137
2446	137
2447	137
2448	137
2449	137
2450	137
2451	137
2452	137
2453	137
2454	137
2455	137
2457	137
2458	137
2459	137
2460	137
2461	137
2462	137
2463	137
2464	137
2465	137
2466	137
2467	137
2469	137
2470	137
2471	137
2472	137
2473	137
2474	137
2475	137
2476	137
2477	137
2478	137
2479	137
2481	137
2482	137
2483	137
2484	137
2485	137
2486	137
2487	137
2488	137
2489	137
2490	137
2491	137
2493	137
2494	137
2495	137
2496	137

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2497	137	2559	45	3097	187	3145	187
2498	137	2560	45	3098	187	3146	187
2499	137	2562	45	3100	187	3147	187
2500	137	2563	45	3101	187	3148	187
2501	137	2564	48	3102	187	3149	187
2502	137	2565	48	3104	187	3150	187
2503	137	2566	48	3105	187	3152	187
2505	137	2567	48	3106	187	3153	187
2506	137	2568	34	3108	187	3154	187
2507	137	2569	34	3109	187	3155	188
2508	137	2570	60	3110	187	3156	188
2509	137	2571	34	3111	187	3157	188
2510	137	3000	30	3112	187	3158	188
2511	137	3001	44	3113	187	3159	188
2512	237	3002	30	3114	187	3160	188
2513	137	3060	187	3117	187	3161	188
2514	137	3061	187	3118	187	3162	188
2515	137	3062	187	3119	187	3163	188
2517	137	3064	187	3120	187	3164	188
2518	137	3065	187	3121	187	3165	188
2519	137	3066	187	3122	187	3166	188
2520	137	3068	187	3124	187	3167	188
2521	137	3069	187	3125	187	3168	188
2522	137	3070	187	3126	187	3169	188
2523	137	3072	187	3127	187	3170	188
2524	137	3073	187	3128	187	3171	188
2525	137	3074	187	3129	187	3172	188
2526	137	3077	187	3130	187	3173	188
2527	137	3078	187	3132	187	3174	188
2529	137	3081	187	3133	187	3175	188
2530	137	3082	187	3134	187	3176	188
2531	137	3085	187	3136	187	3177	188
2532	137	3086	187	3137	187	3178	188
2533	137	3088	187	3138	187	3179	188
2534	137	3089	187	3139	187	3180	188
2535	137	3090	187	3140	187	3181	188
2536	137	3092	187	3141	187	3182	188
2537	137	3093	187	3142	187	3183	188
2539	137	3094	187	3143	187	3184	188
2539	137	3096	187	3144	187	3185	188

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3186	188	3226	188	3256	189	3306	189
3187	188	3277	188	3257	189	3307	189
3188	188	3228	188	3258	189	3308	189
3189	188	3229	188	3259	189	3309	189
3190	188	3230	188	3270	189	3310	189
3191	188	3231	188	3271	189	3311	189
3192	188	3232	188	3272	189	3312	189
3193	188	3233	188	3273	189	3313	189
3194	188	3234	188	3274	189	3314	189
3195	188	3235	189	3275	189	3315	109
3196	188	3236	188	3276	189	3316	189
3197	188	3237	188	3277	189	3317	189
3198	188	3238	188	3278	189	3318	189
3199	188	3239	188	3279	189	3319	189
3200	188	3240	188	3280	189	3320	189
3201	188	3241	188	3281	189	3321	189
3202	188	3242	188	3282	189	3322	189
3203	188	3243	188	3283	189	3323	189
3204	188	3244	188	3284	189	3324	189
3205	188	3245	188	3285	189	3325	189
3206	188	3246	188	3286	189	3326	189
3207	188	3247	188	3287	189	3327	189
3208	188	3248	188	3288	189	3328	189
3209	188	3249	188	3289	189	3329	189
3210	188	3250	188	3290	189	3330	189
3211	188	3251	189	3291	189	3331	189
3212	188	3252	189	3292	189	3332	189
3213	188	3253	189	3293	189	3333	189
3214	188	3254	189	3294	189	3374	189
3215	188	3255	189	3295	189	3335	189
3216	188	3256	189	3296	189	3336	189
3217	188	3257	189	3297	189	3337	189
3218	188	3258	189	3298	189	3338	189
3219	188	3259	189	3299	189	3339	189
3220	188	3260	189	3300	189	3340	189
3221	188	3261	189	3301	189	3341	189
3222	188	3262	189	3302	189	3342	189
3223	188	3263	189	3303	189	3343	189
3224	188	3264	189	3304	189	3344	189
3225	188	3265	189	3305	189	3345	189

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3346	190	3386	190	3426	190	4706	112
3347	190	3387	190	3427	190	4707	160
3348	190	3388	190	3428	190	4708	160
3349	190	3389	190	3429	190	4709	160
3350	190	3390	190	3430	190	4713	156
3351	190	3391	190	3431	190	4714	156
3352	190	3392	190	3432	190	4715	156
3353	190	3393	190	3433	190	4717	58
3354	190	3394	190	3434	190	4719	156
3355	190	3395	190	3435	190	4722	156
3356	190	3396	190	3436	190	4723	156
3357	190	3397	190	3437	190	4729	162
3358	190	3398	190	3438	190	4730	162
3359	190	3399	190	3439	190	4731	162
3360	190	3400	190	3440	190	4732	122
3361	190	3401	190	3441	190	4734	122
3362	190	3402	190	3442	190	4735	126
3363	190	3403	190	4652	132	4736	124
3364	190	3404	190	4653	134	4737	122
3365	190	3405	190	4654	134	4738	122
3366	190	3406	190	4655	134	4739	122
3367	190	3407	190	4656	134	4740	124
3368	190	3408	190	4657	134	4741	124
3369	190	3409	190	4659	114	4742	124
3370	190	3410	190	4671	114	4743	126
3371	190	3411	190	4672	132	4745	122
3372	190	3412	190	4674	132	4746	122
3373	190	3413	190	4675	132	4748	122
3374	190	3414	190	4683	132	4749	124
3375	190	3415	190	4684	132	4750	126
3376	190	3416	190	4685	132	4751	126
3377	190	3417	190	4686	132	4752	126
3378	190	3418	190	4689	112	4754	70
3379	190	3419	190	4691	114	4755	70
3380	190	3420	190	4692	114	4756	70
3381	190	3421	190	4694	114	4760	70
3382	190	3422	190	4695	114	4761	70
3383	190	3423	190	4698	114	4762	70
3384	190	3424	190	4700	112	4765	118
3385	190	3425	190	4701	112	4766	118

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4770	118	4855	55	6296	74	6697	110
4771	118	4856	56	6298	74	6698	110
4772	118	4857	104	6279	116	6699	110
4773	118	4858	104	6282	104	6700	110
4782	116	4861	56	6283	106	6706	110
4783	118	4862	56	6284	106	6707	110
4788	74	4867	58	6285	106	6790	26
4790	74	4872	120	6286	106	6791	26
4791	72	4874	54	6287	106	6792	26
4793	74	4878	116	6288	106	6793	26
4798	70	4884	52	6289	106	6794	30
4799	72	4885	54	6291	104	6795	30
4802	72	4886	52	6292	54	6796	30
4803	72	4890	74	6298	120	6797	30
4805	72	4891	54	6299	120	6798	30
4806	72	4897	58	6300	52	6799	30
4809	76	4902	54	6303	52	6801	30
4810	76	4906	50	6304	52	6802	30
4811	76	4908	50	6307	54	6803	30
4812	76	4950	24	6310	54	6804	32
4814	76	4952	127	6312	54	6805	32
4815	72	4956	120	6320	122	6870	178
4819	76	4958	118	6321	124	6873	18
4820	76	4959	118	6322	124	6874	20
4825	76	4960	120	6323	124	6923	112
4829	116	4969	74	6324	124	6929	108
4830	114	4970	74	6325	124	6930	108
4831	116	4971	74	6326	124	6941	20
4834	114	4975	168	6328	126	6942	20
4835	116	4976	168	6329	126	6991	180
4836	114	4977	168	6330	126	6992	180
4838	116	4980	90	6331	126	6993	180
4839	116	4981	90	6332	126	6994	180
4843	104	4983	90	6333	126	6995	180
4844	58	4984	90	6359	84	-'Gel	178
4848	58	4985	90	6359	18	7002	178
4849	54	4986	90	6370	122	7003	178
4852	56	4989	114	6371	104	7004	178
4853	74	4991	90	6372	180	7005	178
4854	56	5297	106	6696	110	7021	32

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
7022	32						
7023	32						
7025	28						
7026	28						
7029	28						
7030	28						
7572	22						
7577	22						
7580	24						
7629	180						
7630	180						

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Additional Part Marking	180
Additional Requirements	178
Altitude	26
Aperture Cards Required	20
Applicable Documents	182
Base Document	18
Capacitance	32
Capacitance Drift	34
Case	26
City, State, Zip	18
Classification	22
CompanyName/Command	18
Configuration	22
Contract Number/Office Symbol	18
Control	18
Cooling Media	28
Corona	36
Current Rating	40
Current Rating, Pulse	40
Date	18
DC Leakage	44
DC Resistance	46
Definition of Hermetic Sealing	182
Design and Construction	26
Design Reliability	28
Dielectric Absorption	48
Dielectric Voltage Stress	28
Dielectric Withstanding Voltage at Reduced Barometric Pressure	50
Dielectric Withstanding Voltage at Sea Level	54
Dissipation Factor	58
Equivalent Series Resistance (ESR)	60
Extended Foil Technique	28
Finishes	24
Flash point, Impregnant/Filling Compound	62
Format	18
Frequency, Operating Range	64
Frequency Rating, Continuous Current	66
Fungus	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Government Design Activity FSCM	18
Humidity	70
Illustrations	24
Immersion	76
Impedance	78
Inductance	78
Insertion Loss	80
Insulation Resistance	84
Materials	24
Metals	24
Moisture Resistance	88
Mounting Hardware	178
Nomenclature	182
Notes	182
Operation in Oil	90
Overload/Voltage Drop	94
Packaging	182
Part Marking	180
Part Number	20
Part Number Cross-Reference	182
Permeability, Magnetic	98
Phone Number	18
Power Factor	98
Positive Terminal (Anode) Marking	180
Preconditioning	100
Quality Assurance Provisions	182
Quality Factor	102
Radiographic	104
Rating	22
Reliability Screening (Burn-in, Ageing, Conditioning, Stabilization, Load Life, Overload)	108
Requester FSCM	18
Requester's Name	18
Resistance to Soldering Heat	112
Resistance to Solvents	114
Revision of AEDPS Document (Number)	20

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Salt Spray	116
Sand and Dust	118
Schematic	30
Scope	20
Seal	122
Shock, High Impact	126
Shock, Specified Pulse	130
Shorting Wire	182
Solderability	132
Source Table	20
Stability at Low and High Temperatures	134
Street/Building	18
Superseded Document	182
System Application	18
Tabulated Characteristics	24
Temperature	30
Temperature Coefficient/Temperature Characteristic/Voltage Temperature Limits	138
Temperature, Exposure, High	142
Temperature, Exposure, Low	146
Temperature, operation, Low	148
Terminal Strength	152
Thermal Shock	156
Units of Measure	20
Vibration, High Frequency	158
Vibration, Low Frequency	158
Vibration, Random	160
Voltage	164
Volt Ampere Rating	32
Voltage, Reverse Rating	168
Voltage, Ripple Rating	170
Voltage Standing Wave Ratio (VSWR)	172
Voltage, Surge Rating	174
Weight	176
Workmanship	32
	178

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET___OF___

*TITLE CODE 1 2 3 4 5 6	*REQUESTER NO. 7 8 9 10 11 12	CHAR CODE 13 14 15 16
*REQUESTER'S NAME		Ø 1 Ø 1
*COMPANY NAME/COMMAND		Ø 1 Ø 2
*STREET/BUILDING		Ø 1 Ø 3
*CITY, STATE, ZIP		Ø 1 Ø 4
*PHONE NO. INCLUDE A/C AUTOVON IF APPLICABLE		Ø 1 Ø 5
*DATE		1 Ø Ø 3
*REQUESTER FSCM		1 Ø Ø 4
*CONTRACT NO./OFFICE SYMBOL		1 Ø Ø 5
*BASE DOCUMENT		1 Ø Ø 6
*SYSTEM APPLICATION		1 Ø Ø 8
*GOVERNMENT DESIGN ACTIVITY FSCM		6 3 6 9
*FORMAT SIX SECTION DOCUMENT.		Ø 7 Ø Ø
ONE SECTION DOCUMENT.		Ø 8 Ø Ø
SEARCH ONLY.		Ø 1 Ø 6
APERTURE CARDS REQUIRED.		Ø 1 Ø 7
REVISION OF AEDPS DOCUMENT NO.		Ø 1 Ø 8
*CONTROL SOURCE.		6 8 7 3
SPECIFICATION.		6 8 7 4
*SOURCE TABLE		9 1 5 1
UNIT OF MEASURE U.S.		6 9 4 1
SI.		6 9 4 2

CHARACTERISTIC VALUE

20 25 30 35 40 45 50 55 60 65 70 75 LINE NO. 79 80

PLEASE SUPPLY THE FOLLOWING:

DASH-NUMBERED PART .. .. REV .. .. NOTICE # _____

AS A FINAL CHECK, SCAN THE SRS FOR THE FOLLOWING COMMON ERRORS:

- ☐ MANDATORY CHARACTERISTIC CODES AND VALUES NOT SUPPLIED
- ☐ ZERO (Ø) WRITTEN WITHOUT VIRGULE (Ø)
- ☐ USE OF POUND SIGN (#) WITHOUT ACCOMPANYING CHARACTERISTIC VALUE
- ☐ POUND SIGN (#) OMITTED FROM END OF STATEMENT (CHARACTERISTIC VALUE)
- ☐ CHARACTERISTIC CODE USED MORE THAN ONCE (OTHER THAN MULTILINE STATEMENT)
- ☐ MULTILINE STATEMENT NOT NUMBERED IN COLUMN 80


*MANDATORY

DOD-STD-80 17 OCT 78

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET___OF___

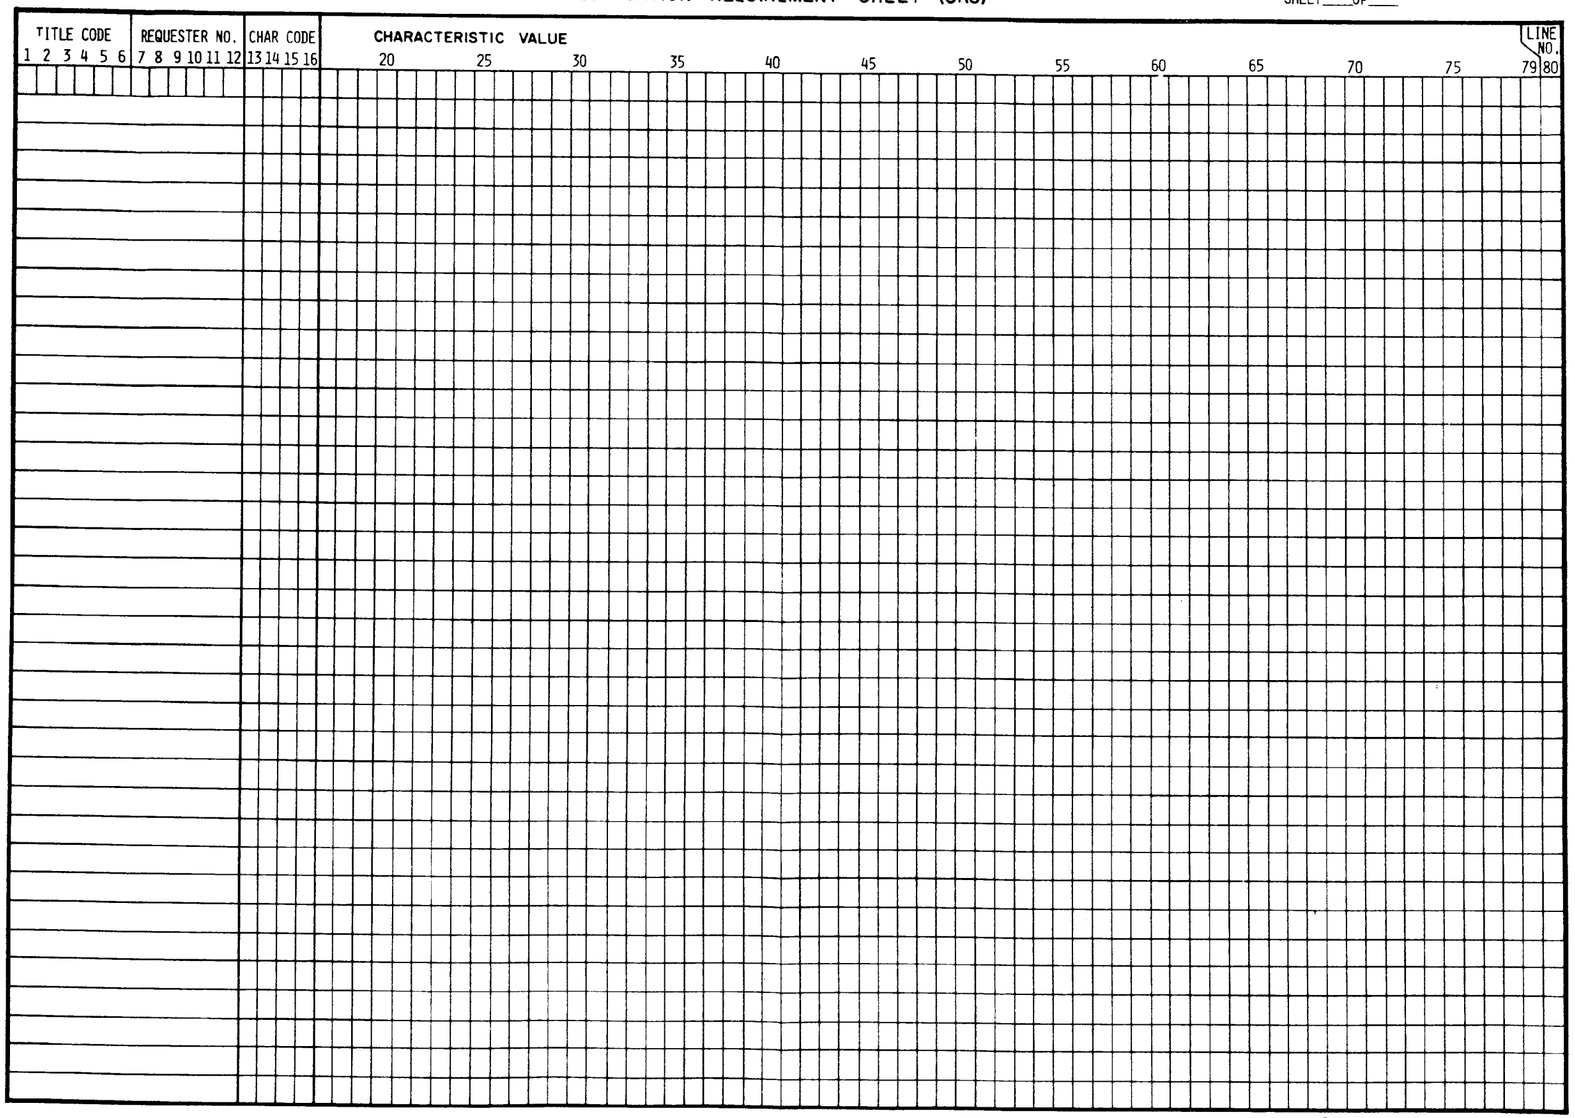

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander,
U.S. Army Missile R & D Command
ATTN: DRDMI-ESD
Redstone A rsenal, Alabama 35809

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.