DOD-STD-35-50A(MI)

31 AUGUST 1987
SUPERSEDING
MIL-STD-35-50
4 APRIL 1974

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

PULLEYS

AREA EDS

NO DELIVERABLE DATA
REQUIRED BY THIS DOCUMENT

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL COMMAND
ALEXANDRIA, VA 22333

Pulleys
Automated Engineering
Document Preparation System

DOD-STD-35-50A(MI)

1. This Military Standard is approved for use by AMC, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Command, ATTN: AMSMI-RD-SE-TD-ST, Redstone Arsenal, Alabama 35898-5270, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

FOREWORD

1. The purpose of DOD-STD-35-50A(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for Pulleys.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	3
	2.1	Government Documents	3
	2.1.1	Specifications and Standards	3
	2.2	Order of Precedence	3
	3.	DEFINITIONS	4
	4.	GENERAL REQUIREMENTS	5
	4.1	Introduction	5
	4.2	Specification Requirement Sheet (SRS)	5
	4.3	Configuration	5
	4.3.1	Dimensions	5
	4.3.2	Illustrations	5
	4.4	Units of Measure	5
	5.	DETAILED REQUIREMENTS	6
	5.1	Introduction	6
	5.2	MSE Formats	6
	5.3	Referenced Documents	6
	5.4	Tabulation	6
	5.5	Keyword Code Index (KCI) and Standard Paragraphs	7
	5.5.1	Interrelationship of Codes	8
	5.5.2	Automatic MSE Data	8
	5.5.3	DOD-STD-35 Tables	8

TABLES

Table	I.	Title Index	2
	II.	Tabulation Candidates	7

APPENDICES

APPENDIX	A.	Illustrations	40
	B.	Characteristic Code Index	46
		Index	48

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for Pulleys.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate a MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts, have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects applicable to all AEDPS dash-numbered parts and included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specification (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for a MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSEs for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes, listed in the Title Index and entered on a SRS, specifies that the title of the MSE will be the title shown in the Title Index.

Each MSE title, listed in the Title Index, is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference. When more than one document is listed for a MSE title, this information will be useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX

MSE TITLE	TITLE CODE	BASE DOCUMENT	
		NUMBER	COVERAGE
PULLEY	114006	MIL-P-7034	GROOVE,ANTIFRIC BEARING LUBED
		MS20219	SECONDARY CONT.
		MS20220	FLIGHT CONTROL
		MS22221	HEAVY DUTY
		MS24566	CONTROL, AFB
		MS39239	FRACTIONAL HORSEPOWER
		MS39260	MULTI-DRIVE,REG DEEP & NARROW
		SAEJ636	V-BELTS AND PULLEYS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Government Documents.

2.1.1 Specifications and Standards. Unless otherwise specified, the following specifications and standards, of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-B-7949	Bearing, Bell, Airframe, Antifriction
MIL-P-7034	Pulleys, Groove, Antifriction Bearing, Grease Lubricated, Aircraft

STANDARD

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-810	Environmental Test Methods and Engineering Guidelines

(Copies of specifications, standards, drawings, and publications, required by contractors in connection with specific procurement functions, should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Order of Precedence. In the event of conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Pulleys.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare a SRS for Pulleys, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Pulleys.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions, described in DOD-STD-35, are applicable to Pulleys.

4.3.2 Illustrations. Illustrations, applicable to Pulleys, are contained in Appendix A to this document.

4.4 Units of Measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE Formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced Documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table II provides codes for column headings which may be used for Pulleys characteristics. When different units of measure are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

TABLE II. TABULATION CANDIDATES

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1562	NUMBER OF GROOVES	1582	RADIAL ECCENTRIC. INCH TIR	1583	LATERAL ECCENTRIC. INCH TIR
1585	RADIAL ECCENTRIC. MM TIR	1586	LATERAL ECCENTRIC. MM TIR	1606	CABLE SIZE
1608	BELT DES.	1610	ALLOWABLE LIMIT LOAD POUNDS	1612	ALLOWABLE LIMIT LOAD KILOGRAMS
1614	ALLOWABLE LIMIT LOAD NEWTONS	1616	MAX LIMIT LOAD LBS	1618	MAX LIMIT LOAD KG
1950	TYPE				

5.5 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on a SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and it's associated code. Enter, on the SRS, the code and the characteristic value required. After the part's unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.5.1 Interrelationship of Codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The standard paragraph, of which the code is a part, is shown adjacent to the code on the right-hand page. When a characteristic value, entered with a code, becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact characteristic value entry, as supplied with the code, except for "X" entries.

5.5.2 Automatic MSE Data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without making additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.5.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in DOD-STD-35. Refer to DOD-STD-35 for general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*REQUESTER'S FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT.	0700
ONE SECTION DOCUMENT.	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6874	THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).
0107	
0108	0108. SCOPE. SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE. PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER. PART NUMBER. THE PART NUMBER FOR THE ITEMS IS (THE SAME AS THE NUMBER OF THIS DOCUMENT) PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.
6941	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.
6942	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION	
(TYPE)	1950
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
DIMENSION TABLE, (SEE TABLE III, DOD-STD-35)	
*UNITS (SELECT ONE)	
U.S.	
(INCHES)	7572
SI	
(MILLIMETERS)	7577
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950
NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.	
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	
MATERIALS (SEE TABLE VI, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VI IS USED.	

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CLASSIFICATION.
1950	TYPE 1950 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATIONS(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.
	MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FINISHES (SEE TABLE VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
METALS	
DISSIMILAR METALS.	7580
DESIGN AND CONSTRUCTION	
PULLEY GROOVES (NUMBER)	1562
BEARINGS (SELECT ONE)	
BEARINGS PER MIL-B-7949.	1572
BEARINGS SHALL BE ____	1570
LUBRICANT	
(NAME)	1573
(SPECIFICATION)	1574
(CLASS)	1575
(TYPE)	1576
(GRADE)	1577

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
7580	METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.
	DESIGN AND CONSTRUCTION.
1562	PULLEY GROOVES. NUMBER OF GROOVES PER PULLEY SHALL BE 1562.
1572	ANTI-FRICTION BEARINGS. ANTI-FRICTION BEARINGS, EXCEPT FOR THE PHYSICAL PROPERTIES, SHALL BE IN ACCORDANCE WITH MIL-B-7949.
1570	BEARINGS. BEARINGS SHALL BE 1570.
	LUBRICANT. LUBRICANT SHALL BE AS FOLLOWS:
1573	LUBRICANT 1573.
1574	SPECIFICATION 1574.
1575	CLASS 1575.
1576	TYPE 1576.
1577	GRADE 1577.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
(NUMBER)	1578
END FACE SQUARE WITH BORE WITHIN (± DEGREES)	1581
MAXIMUM RADIAL ECCENTRICITY (SELECT ONE)	
(INCH)	1582
(MILLIMETER)	1585
MAXIMUM LATERAL ECCENTRICITY (SELECT ONE)	
(INCH)	1583
(MILLIMETER)	1586
MAXIMUM MULTI-GROOVE DIAMETER VARIATION (SELECT ONE)	
(INCH)	1584
(MILLIMETER)	1588
DESIGN CABLE SIZE (DESIGNATION)	1606
DESIGN BELT (DESIGNATION)	1608

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1578	NUMBER 1578.
1581	END FACES. END FACES OF ALL HUBS SHALL BE SQUARE WITH BORE WITHIN PLUS OR MINUS 1581 DEGREE(S).
1582	RADIAL ECCENTRICITY (RUNOUT). RADIAL ECCENTRICITY SHALL BE NOT GREATER THAN 1582 INCH TOTAL INDICATOR READING (TIR).
1585	RADIAL ECCENTRICITY (RUNOUT). RADIAL ECCENTRICITY SHALL BE NOT GREATER THAN 1585 MILLIMETER(S) TOTAL INDICATOR READING (TIR).
1583	LATERAL ECCENTRICITY (RUNOUT). LATERAL ECCENTRICITY SHALL BE NOT GREATER THAN 1583 INCH TOTAL INDICATOR READING (TIR).
1586	LATERAL ECCENTRICITY (RUNOUT). LATERAL ECCENTRICITY SHALL BE NOT GREATER THAN 1586 MILLIMETER(S) TOTAL INDICATOR READING (TIR).
1584	MULTI-GROOVE DIAMETER VARIATION. DIAMETERS AT POINTS OF TANGENCY SHALL NOT VARY FROM GROOVE-TO-GROOVE IN MULTI-GROOVE PULLEYS BY MORE THAN 1584 INCH(S).
1588	MULTI-GROOVE DIAMETER VARIATION. DIAMETERS AT POINTS OF TANGENCY SHALL NOT VARY FROM GROOVE-TO-GROOVE IN MULTI-GROOVE PULLEYS BY MORE THAN 1588 MILLIMETER(S).
1606	CABLE SIZE. PULLEYS SHALL BE DESIGNED TO ACCOMMODATE 1606 CABLE.
1608	BELT DESIGNATION. PULLEYS SHALL BE DESIGNED TO ACCOMMODATE BELTS DESIGNATED 1608.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LOADS	
ALLOWABLE LIMIT LOAD (SELECT ONE)	
(POUNDS)	1610
(KILOGRAMS)	1612
(NEWTONS)	1614
MAXIMUM LIMIT LOAD (SELECT ONE)	
(POUNDS)	1616
(KILOGRAMS)	1618
WEIGHT/MASS	
MAXIMUM WEIGHT/MASS PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	LOADS.
1610	ALLOWABLE LIMIT LOAD SHALL BE 1610 POUND(S).
1612	ALLOWABLE LIMIT LOAD SHALL BE 1612 KILOGRAM(S).
1614	ALLOWABLE LIMIT LOAD SHALL BE 1614 NEWTON(S).
1616	MAXIMUM LIMIT LOAD SHALL BE 1616 POUND(S) INDEPENDENT OF WRAP ANGLE.
1618	MAXIMUM LIMIT LOAD SHALL BE 1618 KILOGRAM(S) INDEPENDENT OF WRAP ANGLE.
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7023	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).
7021	MAXIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	MAXIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
BONDING STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1636
NO FAILURE.	1638
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1622
PER MIL-P-7034.	1623
TEST LOAD (SELECT ONE)	
(POUNDS)	1624
(NEWTONS)	1900
TEST DURATION (MINUTES)	1626
TEST TEMPERATURE (DEGREES CELSIUS)	1628
CORROSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1832
NO CABLE CORROSION.	1834

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1636	BONDING STRENGTH. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1636.
1638	BONDING STRENGTH. PULLEYS SHALL BE CAPABLE OF WITHSTANDING THE BOND STRENGTH PROOF LOAD, WITHOUT FAILURE OF THE BOND BETWEEN THE PULLEY SHEAVE AND BEARING BY LOOSENING, SEPARATION, SHIFTING OF THE BEARING, OR OTHER EVIDENCE OF PULLEY FAILURE.
1622	BONDING STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1622.
1623	BONDING STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BONDING STRENGTH TEST AS REFERENCED IN MIL-P-7034.
1624	TEST LOAD SHALL BE 1624 POUND(S).
1900	TEST LOAD SHALL BE 1900 NEWTON(S).
1626	DURATION OF TEST SHALL BE 1626 MINUTE(S).
1628	TEST TEMPERATURE SHALL BE 1628 DEGREES CELSIUS.
1832	CORROSION. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1832.
1834	CORROSION. SHEAVE MATERIAL SHALL NOT CORRODE CARBON STEEL CABLE COATED WITH TIN OR ZINC.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1822
PER MIL-P-7034.	1823
RELATIVE HUMIDITY (PERCENT)	1824
TEST TEMPERATURE (DEGREES CELSIUS)	1826
TEST DURATION (HOURS)	1828
ENDURANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1792
AS FOLLOWS:	2000
MAXIMUM DIAMETER REDUCTION (SELECT ONE)	
(INCH)	2002
(MILLIMETER)	2004
MEET STATIC FRICTION TORQUE REQUIREMENTS.	2006
MEET BONDING REQUIREMENTS.	1800
MEET WOBBLE REQUIREMENTS.	1802

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1822	CORROSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1822.
1823	CORROSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE CORROSION TEST AS REFERENCED IN MIL-P-7034.
1824	RELATIVE HUMIDITY SHALL BE 1824 PERCENT.
1826	TEST TEMPERATURE SHALL BE 1826 DEGREES CELSIUS.
1828	DURATION OF TEST SHALL BE 1828 HOUR(S).
1792	ENDURANCE. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1792.
2000	ENDURANCE. REQUIREMENT(S) SHALL BE AS FOLLOWS:
2002	PULLEY DIAMETER SHALL NOT BE REDUCED MORE THAN 2002 INCH.
2004	PULLEY DIAMETER SHALL NOT BE REDUCED MORE THAN 2004 MILLIMETER(S).
2006	PULLEYS SHALL MEET STATIC FRICTION TORQUE REQUIREMENT(S) AFTER TEST.
1800	PULLEYS SHALL MEET BONDING TEST REQUIREMENT(S) AFTER TEST.
1802	PULLEYS SHALL MEET WOBBLE TEST REQUIREMENT(S) AFTER TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1782
PER MIL-P-7034.	1784
LIMIT LOAD (SELECT ONE)	
(POUNDS)	1786
(NEWTONS)	2008
REVOLUTIONS (QUANTITY)	1787
FLANGE STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1662
NO FAILURE.	1664
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1652
PER MIL-P-7034.	1653
TEST LOAD (SELECT ONE)	
(POUNDS)	1654
(NEWTONS)	2010

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1782	ENDURANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1782.
1784	ENDURANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE ENDURANCE TEST AS REFERENCED IN MIL-P-7034.
1786	PULLEY LIMIT LOAD SHALL BE 1786 POUND(S).
2008	PULLEY LIMIT LOAD SHALL BE 2008 NEWTON(S).
1787	NUMBER OF REVOLUTIONS SHALL BE 1787.
1662	FLANGE STRENGTH. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1662.
1664	FLANGE STRENGTH. PULLEYS SHALL BE CAPABLE OF WITHSTANDING THE FLANGE STRENGTH LOAD WITHOUT FAILURE OF THE FLANGE BY CHECKING OR SHEARING.
1652	FLANGE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1652.
1653	FLANGE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE FLANGE STRENGTH TEST AS REFERENCED IN MIL-P-7034.
1654	TEST LOAD SHALL BE 1654 POUND(S).
2010	TEST LOAD SHALL BE 2010 NEWTON(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MINIMUM DURATION (MINUTES)	1656
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4760
FUNGUS RESISTANT BY CERTIFICATION OR BY TEST.	4761
NO EVIDENCE OF FUNGUS GROWTH WHEN TESTED.	4762
NO ADVERSE EFFECT.	2060
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4754
PER MIL-STD-810, METHOD 508.	4755
TEST PERIOD (DAYS)	4756
INSPECT SHEAVE MATERIAL.	2062

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1656	DURATION OF TEST SHALL BE NOT LESS THAN 1656 MINUTE(S).
4760	FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.
4761	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED, THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4762	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
2060	FUNGUS. THE SHEAVE MATERIAL SHALL NOT BE ADVERSELY AFFECTED BY FUNGUS GROWTH SUCH AS IS ENCOUNTERED IN TROPICAL CLIMATE.
4754	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.
4755	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.
4756	TEST PERIOD SHALL BE 4756 DAY(S).
2062	AFTER TEST THE SHEAVE MATERIAL SHALL BE INSPECTED TO ASSURE THAT THE PULLEY IS NOT ADVERSELY AFFECTED BY FUNGUS GROWTH SUCH AS IS ENCOUNTERED IN TROPICAL CLIMATE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NONAFTERGLOW	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1762
AS FOLLOWS:	2020
NO AFTERGLOW.	1764
NO BLEEDING OF ADDITIVE.	1768
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1752
PER MIL-P-7034.	1753
FLAME CONTACT DURATION (SECONDS)	1754
AIRBLAST WITHIN (SECONDS)	1756
SHEAVE STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1698
NO FAILURE.	1700

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1762	NONAFTERGLOW. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1762.
2020	NONAFTERGLOW. REQUIREMENT(S) SHALL BE AS FOLLOWS:
1764	PULLEY SHEAVES SHALL SHOW NO AFTERGLOW AFTER FLAME EXTINCTION.
1768	NONAFTERGLOW ADDITIVE SHALL NOT BLEED FROM THE SHEAVE MATERIAL.
1752	NONAFTERGLOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1752.
1753	NONAFTERGLOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE NONAFTERGLOW TEST AS REFERENCED IN MIL-P-7034.
1754	DURATION OF FLAME CONTACT WITH SHEAVE EDGE SHALL BE 1754 SECOND(S).
1756	AIRBLAST SHALL BE APPLIED TO BURNED AREA WITHIN 1756 SECOND(S) AFTER FLAME IS EXTINGUISHED.
1698	SHEAVE STRENGTH. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1698.
1700	SHEAVE STRENGTH. PULLEYS SHALL BE CAPABLE OF WITHSTANDING THE SHEAVE STRENGTH LOAD WITHOUT BUCKLING, SPLITTING, OR OTHER TYPES OF FAILURE OF THE SHEAVE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1682
PER MIL-P-7034.	1684
TEST LOAD (SELECT ONE)	
(POUNDS)	1686
(NEWTONS)	2030
ANGLE OF WRAP (DEGREES)	1688
STATIC FRICTION TORQUE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1732
AS FOLLOWS:	2040
NO LOAD (SELECT ONE)	
(POUND-INCHES)	1734
(NEWTON METERS)	2042
LIMIT LOAD (SELECT ONE)	
(POUND-INCHES)	1736
(NEWTON METERS)	2044

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1682	SHEAVE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1682.
1684	SHEAVE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE SHEAVE STRENGTH TEST AS REFERENCED IN MIL-P-7034.
1686	TEST LOAD SHALL BE 1686 POUND(S).
2030	TEST LOAD SHALL BE 2030 NEWTON(S).
1688	ANGLE OF WRAP FOR SHEAVE STRENGTH LOAD SHALL BE 1688 DEGREE(S).
1732	STATIC FRICTION TORQUE. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1732.
2040	STATIC FRICTION TORQUE. REQUIREMENT(S) SHALL BE AS FOLLOWS:
1734	STATIC FRICTION TORQUE UNDER NO LOAD SHALL BE NOT GREATER THAN 1734 POUND-INCH(S).
2042	STATIC FRICTION TORQUE UNDER NO LOAD SHALL BE NOT GREATER THAN 2042 NEWTON METER(S).
1736	STATIC FRICTION TORQUE UNDER LIMIT LOAD SHALL BE NOT GREATER THAN 1736 POUND-INCH(S).
2044	STATIC FRICTION TORQUE UNDER LIMIT LOAD SHALL BE NOT GREATER THAN 2044 NEWTON METER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1722
PER MIL-P-7034.	1723
LIMIT LOAD (SELECT ONE)	
(POUNDS)	1724
(NEWTONS)	2046
WOBBLE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1602
MINIMUM CLEARANCE (INCH)	1604
MINIMUM CLEARANCE (MILLIMETERS)	2050
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1592
PER MIL-P-7034.	1594
TEST LOAD (SELECT ONE)	
(POUNDS)	1596

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1722	STATIC FRICTION TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1722.
1723	STATIC FRICTION TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE STATIC FRICTION TORQUE TEST AS REFERENCED IN MIL-P-7034.
1724	PULLEY LIMIT LOAD SHALL BE 1724 POUND(S).
2046	PULLEY LIMIT LOAD SHALL BE 2046 NEWTON(S).
1602	WOBBLE. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1602.
1604	WOBBLE. WOBBLE CLEARANCE SHALL BE NOT LESS THAN 1604 INCH.
2050	WOBBLE. WOBBLE CLEARANCE SHALL BE NOT LESS THAN 2050 MILLIMETER(S).
1592	WOBBLE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1592.
1594	WOBBLE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE WOBBLE CLEARANCE AND BEARING STRENGTH TEST AS REFERENCED IN MIL-P-7034.
1596	TEST LOAD SHALL BE 1596 POUND(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
(NEWTONS)	2052
PERFORMANCE CHARACTERISTICS (SEE TABLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	
MOUNTING HARDWARE (SEE TABLE VIII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VIII IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-130.	7629

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2052	TEST LOAD SHALL BE 2052 NEWTON(S).

PERFORMANCE CHARACTERISTICS. PERFORMANCE CHARACTERISTICS SHALL BE AS SHOWN IN THE PERFORMANCE CHARACTERISTICS TABLE.

MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.

6870 WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.

ADDITIONAL REQUIREMENTS.

7001 (A) 7001.

7002 (B) 7002.

7003 (C) 7003.

7004 (D) 7004.

7005 (E) 7005.

6372 PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.

7629 PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995

APPLICABLE DOCUMENTS (SEE DOD-STD-35)

QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)

PACKAGING (SEE DOD-STD-35)

NOTES (SEE DOD-STD-35)

NOMENCLATURE (SEE DOD-STD-35)

SUPERSEDED DOCUMENT (SEE DOD-STD-35)

PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

Custodians:
Army-MI

User activity:
Army-MU

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

Preparing activity:
Army-MI


(Project EDS-A371)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX A


ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

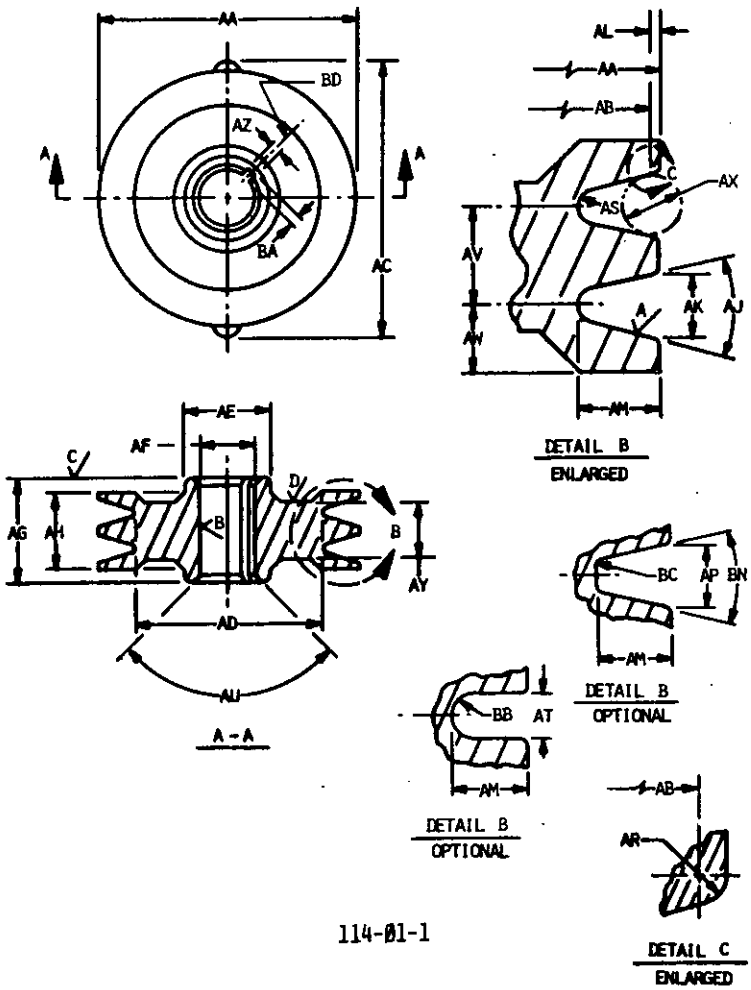


114-01-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

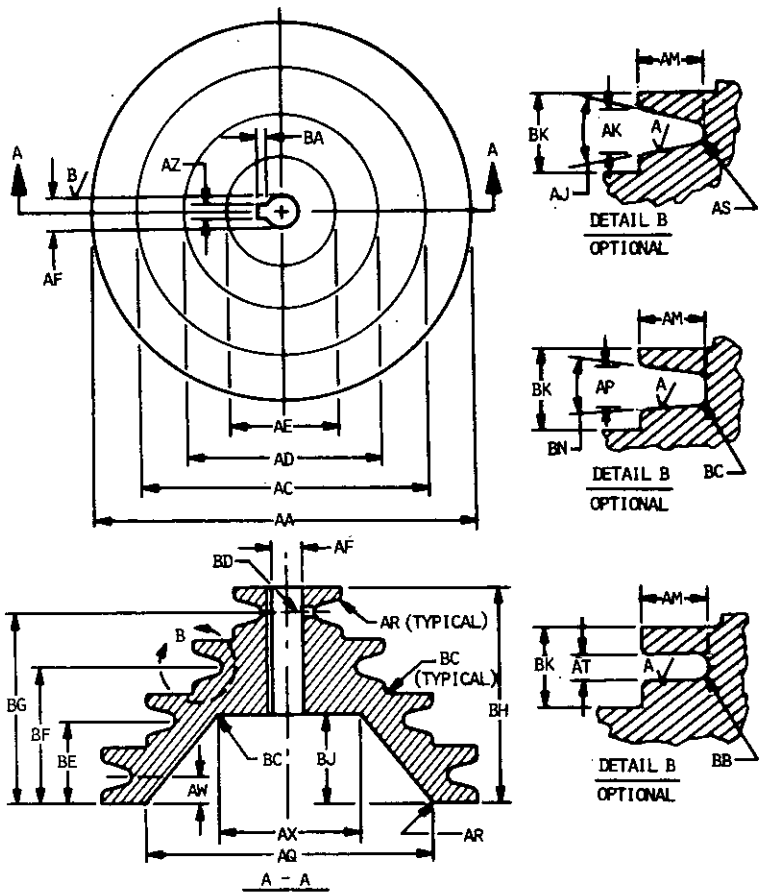

114-02-1


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

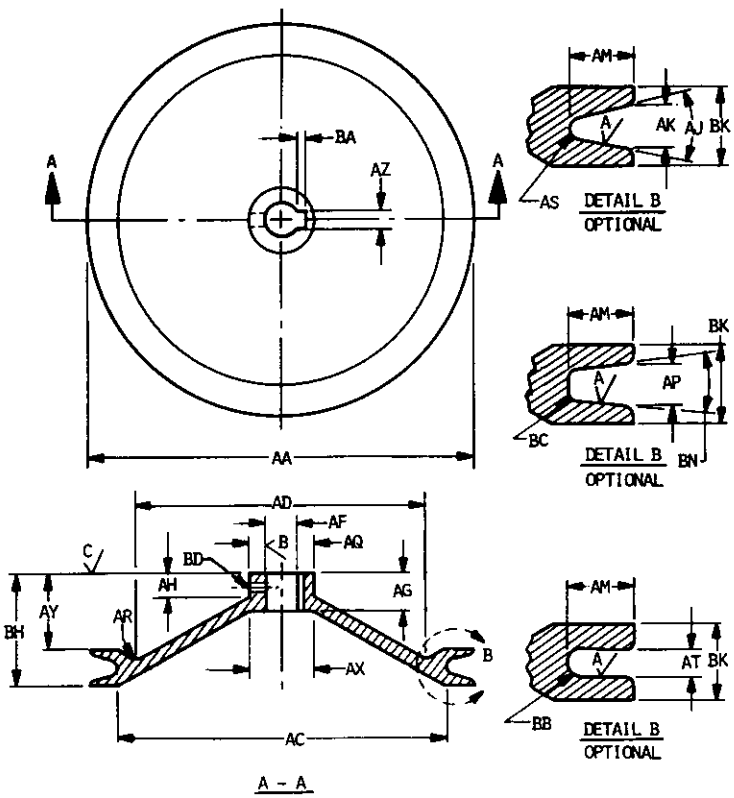


A - A

114-03-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

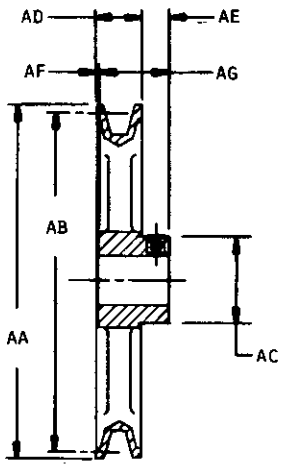


114-03-2

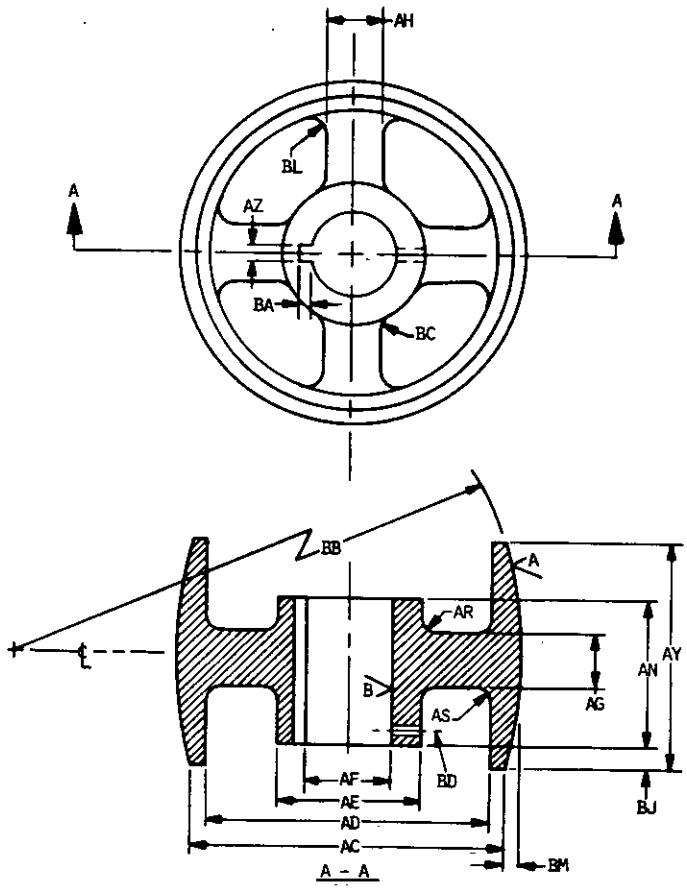


114-04-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

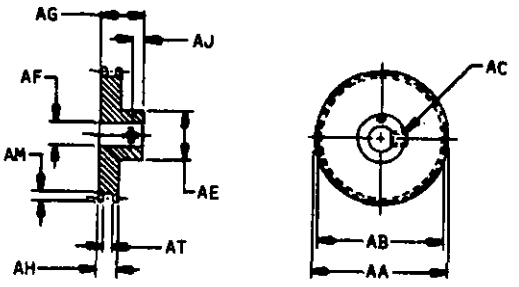

114-05-1



114-05-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	10	1616	20	1802	24	6991	38
0102	10	1618	20	1822	24	6992	38
0103	10	1622	22	1823	24	6993	38
0104	10	1623	22	1824	24	6994	38
0105	10	1624	22	1826	24	6995	38
0107	12	1626	22	1828	24	7001	36
0108	12	1628	22	1832	22	7002	36
0700	10	1636	22	1834	22	7003	36
0800	10	1638	22	1900	22	7004	36
1004	10	1652	26	1950	14	7005	36
1005	10	1653	26	2000	24	7021	20
1006	10	1654	26	2002	24	7022	20
1008	10	1656	28	2004	24	7023	20
1009	14	1662	26	2006	24	7024	20
1562	16	1664	26	2008	26	7572	14
1570	16	1682	32	2010	26	7577	14
1572	16	1684	32	2020	30	7580	16
1573	16	1686	32	2030	32	7629	36
1574	16	1688	32	2040	32		
1575	16	1698	30	2042	32		
1576	16	1700	30	2044	32		
1577	16	1722	34	2046	34		
1578	18	1723	34	2050	34		
1581	18	1724	34	2052	36		
1582	18	1732	32	2060	28		
1583	18	1734	32	2062	28		
1584	18	1736	32	4754	28		
1585	18	1752	30	4755	28		
1586	18	1753	30	4756	28		
1588	18	1754	30	4760	28		
1592	34	1756	30	4761	28		
1594	34	1762	30	4762	28		
1596	34	1764	30	4950	14		
1602	34	1768	30	6369	10		
1604	34	1782	26	6372	36		
1606	18	1784	26	6870	36		
1608	18	1786	26	6873	10		
1610	20	1787	26	6874	12		
1612	20	1792	24	6941	12		
1614	20	1800	24	6942	12		

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Additional Part Marking	38
Additional Requirements	36
Aperture Cards Required	12
Applicable Documents	38
Base Document	10
Bonding Strength	22
City, State, Zip	10
Classification	14
Company Name/Command	10
Configuration	14
Contract Number/Office Symbol	10
Control, Source	10
Control, Specification	12
Corrosion	22
Design and Construction	16
Endurance	24
Finishes	16
Flange Strength	26
Format	10
Fungus	28
Government Design Activity FSCM	10
Illustrations	14
Materials	14
Metals	16
Mounting Hardware	36
Nomenclature	38
Nonafterglow	30
Notes	38

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Packaging	38
Part Marking	36
Part Number	12
Part Number Cross-Reference	38
Performance Characteristics	36
Phone Number	10
Quality Assurance Provisions	38
Requester's FSCM	10
Requester's Name	10
Revision of AEDPS Document (Number)	12
Scope	12
Sheave Strength	30
Source Table	12
Static Friction Torque	32
Street/Building	10
Superseded Document	38
System Application	10
Tabulated Characteristics	14
Units of Measure	12
Wobble	34
Workmanship	36

☆U.S. GOVERNMENT PRINTING OFFICE: 1987 - 704-036-75089

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-50A(MI), dated 31 August 1987 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-50A(MI), dated 31 August 1987 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.