DOD-STD-35-52A(MI)
2 March 1979
SUPERSEDING
MIL-STD-35-52(MI)
7 JUNE 1974

# MILITARY STANDARD

# LAMPS

# AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

FSC EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Lamps
Automated Engineering
Document Preparation System

DOD-STD-35-52A(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

# FOREWORD

1. The purpose of DOD-STD-35-52A(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for Lamps.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS

| | | | Page |
|---|---|---|---|
| Paragraph | 1. | SCOPE | 1 |
| | 1.1 | General | 1 |
| | 1.2 | Purpose | 1 |
| | 1.3 | Utilization | 1 |
| | 1.4 | Military Specification Exception Title Index | 1 |
| | 2. | REFERENCED DOCUMENTS | 9 |
| | 2.1 | Issues of documents | 9 |
| | 2.2 | Other publications | 10 |
| | 3. | DEFINITIONS | 11 |
| | 4. | GENERAL REQUIREMENTS | 12 |
| | 4.1 | Introduction | 12 |
| | 4.2 | Specification Requirement Sheet (SRS) | 12 |
| | 4.3 | Configuration | 12 |
| | 4.3.1 | Dimensions | 12 |
| | 4.3.2 | Illustrations | 12 |
| | 4.4 | Units of measure | 12 |
| | 5. | DETAILED REQUIREMENTS | 13 |
| | 5.1 | Introduction | 13 |
| | 5.2 | MSE Formats | 13 |
| | 5.3 | Referenced documents | 13 |
| | 5.4 | Tabulation | 13 |
| | 5.5 | Keyword Code Index (KCI) and Standard Paragraphs | 17 |
| | 5.5.1 | Interrelationship of Codes | 17 |
| | 5.5.2 | Automatic MSE Data | 17 |
| | 5.5.3 | DOD-STD-35 Tables | 17 |

TABLES

| | | | |
|---|---|---|---|
| Table | I. | Title Index | 3 |
| | II. | Tabulation candidates | 14 |

APPENDICES

| | | | |
|---|---|---|---|
| Appendix | A. | Illustrations | 134 |
| | B. | Characteristic Code Index | 168 |
| | | Index | 173 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

# 1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for Lamps.

1.2 Purpose. This military standard provides to the user the necessary information for the preparation of a Specification Requirement Sheet (SRS) which will result in the generation of an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this standard, the following list contains subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not caontained in the Title Index, leave the title code spaces on the SRS blank and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one doucment is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX.

| MSE TITLE | TITLE CODE | BASE DOCUMENT NUMBER | BASE DOCUMENT COVERAGE |
|---|---|---|---|
| LAMPS, FLUORESCENT | 304003 | W-L-116 | GENL LTG SVCE |
| | | MS15588 | T-5, MINTR BIPIN |
| | | MS15589 | T-12, MDM BIPIN |
| | | MIL-L-13456 | AUTO-FCSG PHOTOGRAMMETRIC RECTIFIER |
| LAMPS, GLOW | 304002 | MIL-L-15098 | FOR IND AND EQPT LAMP ASSYS |
| LAMPS, INCANDESCENT | 304001 | W-L-50 | SLD BEAM REFL |
| | | MS18002 | PAR-36, 2 SCREW TERMINAL |
| | | MS18003 | PAR-36, 3 LUG CONTACT |
| | | MS18004 | PAR-46, 2 SCREW TERMINAL |
| | | MS18005 | PAR-46, 2 SCREW TERMINAL |
| | | MS18006 | PAR-46, 2 SCREW TERMINAL |
| | | MS18007 | PAR-56, 2 SCREW TERMINAL |
| | | MS18008 | PAR-56, 3 CABLE |
| | | MS18009 | PAR-56, 3 LUG CONTACT |
| | | MS18010 | SLD BEAM PAR56, 3 LUG CONTACT |
| | | W-L-53 | PAR-36 |
| | | W-L-59 | PAR-56 |
| | | W-L-62 | PAR-46 |
| | | W-L-65 | PAR-56 |
| | | W-L-68 | PAR-64 |
| | | W-L-71 | PAR-38 |
| | | W-L-77 | PAR-36 |
| | | W-L-101 | LGE TUNG FIL |
| | | MS15541 | A-21, MDM SCREW |
| | | MS15543 | R-40, MDM SCREW |
| | | MS15550 | T-8, MDM SCREW |
| | | MS15551 | T-10, MDM SCREW |
| | | MS15562 | T-8, BAYC, SC |
| | | MS15567 | S-6, BAYC, DC |
| | | MS15574 | T-7, CAND SCREW |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

| MSE TITLE | TITLE CODE | BASE DOCUMENT NUMBER | BASE DOCUMENT COVERAGE |
|---|---|---|---|
| LAMPS, INCANDESCENT | 304001 (CONT) | MS15579 | T-6, CAND SCREW |
| | | MS15581 | T-4, CAND SCREW |
| | | MS15586 | A-19, MDM SCREW |
| | | MS15592 | PS-25, MDM SCR |
| | | MS15593 | PS-30, MDM SCR |
| | | MS15596 | G-30, MDM SCREW |
| | | MS15599 | PS-40, MGL SCR |
| | | MS15600 | A-21, MDM SCREW |
| | | MS15602 | T-20, MGL SCREW |
| | | MS15605 | T-20, MGL BPT |
| | | MS15740 | G-25; MOGUL PREFOCUSING |
| | | W-L-111 | MINTR TUNG FIL |
| | | MS15536 | T-3-1/4, MINTR SCREW |
| | | MS15564 | RP-11, DC BAYC |
| | | MS15565 | RP-11, SC BAYC |
| | | MS15568 | G-8, BAY CAND DOUBLE CONTACT |
| | | MS15569 | G-6, BAY CAND DOUBLE CONTACT |
| | | MS15570 | G-6, BAY CAND SINGLE CONTACT |
| | | MS15573 | G-3-1/2, MINTR BAY CAND |
| | | MS15584 | S-8, BAY CAND DOUBLE CONTACT |
| | | MS15585 | G-16-1/2, BAY CAND DC |
| | | MS15612 | T-1-3/4 MDGT SCREW |
| | | MS25069 | T-4-1/2 BAYONET MINTR, SC |
| | | MS35478 | S-8, BAY CAND SINGLE CONTACT |
| | | MS35480 | R-12, BAY CAND SC |
| | | MS35481 | S-8, BAY CAND DC |
| | | MS51608 | T-14, SPCL SCR BASE |
| | | W-L-126 | PROJECTION LAMP |
| | | W-L-1289 | MEDICAL INSTR |
| | | MIL-L-6363 | AVN SVCE GENL SPEC FOR |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX.

| MSE TITLE | TITLE CODE | BASE DOCUMENT NUMBER | BASE DOCUMENT COVERAGE |
|---|---|---|---|
| LAMPS, INCANDESCENT | 304001 (CONT) | MS3338 | T-1, BASED 28 VOLT |
| | | MS3366 | PAR-64 BULB, SCREW TERMINAL |
| | | MS24321 | T-20 MED BIPOST |
| | | MS24348 | PAR-56, AIRPORT APPROACH |
| | | MS24367 | MINTR INT LTG |
| | | MS24488 | PAR56, SCR TERM |
| | | MS24513 | GG-12B1 BAYONET INDEXING, SC |
| | | MS24517 | PAR-46, SCREW TERMINAL |
| | | MS25012 | T-10, MEDIUM PREFOCUSING |
| | | MS25013 | T-14, MEDIUM PREFOCUSING |
| | | MS25014 | T-20, MEDIUM PREFOCUSING |
| | | MS25015 | T-20, MGL BPT |
| | | MS25231 | T-3-1/4 MINTR BAY, SC |
| | | MS25235 | S-11, BAY CAND SINGLE CONTACT |
| | | MS25236 | T-1-1/4 KNURLED SCREW |
| | | MS25237 | T-1-3/4 MIDGET FLANGED SC |
| | | MS25238 | G-5, BAY CAND SINGLE CONTACT |
| | | MS25239 | PAR-36, SCREW TERM, SNLG |
| | | MS25241 | PAR-46, SCREW TERMINAL |
| | | MS25242 | PAR-64, SCREW TERMINAL |
| | | MS25243 | PAR-36, SCREW TERMINAL |
| | | MS25309 | GG-10, BAY CAND SINGLE CONTACT |
| | | MS25338 | GG-12A1, BAY CANDELABRA SC |
| | | MS25451 | T-24 MDM BIPOST |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

| MSE TITLE | TITLE CODE | BASE DOCUMENT NUMBER | BASE DOCUMENT COVERAGE |
|---|---|---|---|
| LAMPS, INCANDESCENT | 304001 (CONT) | MS28798 | FOCUSED, MINIATURE SCREW |
| | | MS28926 | PAR-46, SCREW TERM, TAXIING |
| | | MS28933 | T-20, MEDIUM BIPOST |
| | | MS90451 | T-1, INT LTG, SHORT |
| | | MS90452 | T-3/4, INT LTG |
| | | MS15531 | T-1-1/4 SPECIAL |
| | | MS15532 | S-8 PREFOCUSING CANDELABRA DC |
| | | MS15533 | T-7, MINTR SCR |
| | | MS15534 | T-7 CAND SCR |
| | | MS15535 | PAR-56 SLD BM, SCREW TERMINAL |
| | | MS15537 | TL-3, MINTR SCR |
| | | MS15539 | T-12, DC, MEDIUM RING |
| | | MS15540 | T-5, DC, PREFOCUSING |
| | | MS15543 | R-40, MDM SCR |
| | | MS15545 | T-12, MDM SCREW 3 CONTACT |
| | | MS15546 | T-8, CAND SCR |
| | | MS15548 | T-8, BAY CAND DOUBLE CONTACT |
| | | MS15554 | S-14, MDM SCREW |
| | | MS15555 | T-12, MEDIUM PREFOCUSING, SC |
| | | MS15556 | T-10, MEDIUM PREFOCUSING, SC |
| | | MS15557 | T-8, CANDELABRA PREFOCUSING, SC |
| | | MS15559 | RP-11, SC PREFOCUSING |
| | | MS15560 | S-8, CANDELABRA PREFOCUSING, SC |
| | | MS15561 | T-8, BAY CAND, SINGLE CONTACT |
| | | MS15563 | S-11, BAY CAND, SINGLE CONTACT |
| | | MS15566 | S-8, BAY CAND, SINGLE CONTACT |



Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX.

| MSE TITLE | TITLE CODE | BASE DOCUMENT NUMBER | BASE DOCUMENT COVERAGE |
|---|---|---|---|
| LAMPS, INCANDESCENT | 304001 (CONT) | MS15571 | T-3-1/4, MINTR BAYONET, SC |
| | | MS15572 | G-4-1/2, MINTR BAY, SC |
| | | MS15575 | S-11 CAND SCR |
| | | MS15577 | G-8, CAND SCR |
| | | MS15578 | G-8, MINTR SCR |
| | | MS15580 | G-6, CAND SCR |
| | | MS15582 | G-15-1/2, SHORT CANDELABRA SCR |
| | | MS15583 | T-2-1/2, SPECIAL SCREW |
| | | MS15587 | G-4-1/2 MINIATURE SCREW |
| | | MS15594 | PAR-56, 3 LUG TERMINAL |
| | | MS15597 | G-30, MOGUL, 3 CONTACT |
| | | MS15598 | PS-25, MOGUL, 3 CONTACT |
| | | MS15604 | T-14, MEDIUM BIPOST |
| | | MS15607 | PAR-46, SCREW TERMINAL |
| | | MS15608 | PAR-64, SCREW TERMINAL |
| | | MS15609 | T-2, TEL SL |
| | | MS15610 | B-3-1/2 FLANGE MINIATURE |
| | | MS15611 | G-3-1/2 MINIATURE SCREW |
| | | MS15613 | G-5, CAND DC |
| | | MS15615 | T-20, MEDIUM PREFOCUSING, SC |
| | | MS15819 | PAR-36, MOGUL END PRONG |
| | | MS15830 | S-8, CAND SCR |
| | | MS16105 | G-9, BAYONET CANDELABRA, DC |
| | | MS16123 | C-7, BAY, DC |
| | | MS16125 | PAR-56, SLD BM, MOGUL END PRONG |
| | | MS16524 | PAR-36, SCREW TERMINAL |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

| MSE TITLE | TITLE CODE | BASE DOCUMENT NUMBER | BASE DOCUMENT COVERAGE |
|---|---|---|---|
| LAMPS, INCANDESCENT (CONT) | 304001 (CONT) | MS16563 | R-30, MDM SCR |
| | | MS16845 | PAR-46, MOGUL END PRONG |
| | | MS17163 | PAR-46, 12 VOLT FLOOD LAMP, 2 CONTACT LUGS |
| | | MS17165 | PAR-46, 24 VOLT FLOODLAMP, 2 CONTACT LUGS |
| | | MS17166 | PAR-46, 24 VOLT HEADLAMP, 2 CONTACT LUGS |
| | | MS17292 | PAR-46, 12 VOLT SPOTLAMP, MOGUL |
| | | MS17994 | PAR-46, SCREW TERMINAL |
| | | MS17997 | S-11, BAY CAND, DOUBLE CONTACT |
| | | MS18235 | CRTG, SHT CYL PLUG-IN |
| | | MS18238 | CRTG, SHT CYL PLUG-IN |
| | | MS21999 | PAR-36, SCREW TERMINAL |
| | | MS24515 | T-1, FLANGED, SUB-MINIATURE |
| | | MS27569 | T-1-3/4, MINTR |
| | | MS27570 | T-1-3/4, MINTR |
| | | MS27571 | T-1, MINIATURE |
| | | FED-STD-237 | 10 TO 300 WATT |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

## 2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

FEDERAL

| | |
|---|---|
| W-L-111 | Lamp, Incandescent |
| W-L-00116 | Lamps, Flourescent |

MILITARY

| | |
|---|---|
| MIL-L-6363 | Aviation Service, Incandescent Lamps General Specification For |
| MIL-C-25050 | Colors, Aeronautical Lights and Lighting Equipment, General Requirements For |

STANDARDS

MILITARY

| | |
|---|---|
| DOD-STD-35 | Automated Engineering Document Preparation System |
| MIL-STD-130 | Identification Marking |
| MIL-STD-202 | Test Methods for Electronic and Electrical Component Parts |
| MIL-STD-810 | Environmental Test Methods |
| MIL-STD-1285 | Marking of Electrical and Electronic Parts |
| MIL-STD-1523 | Age Control of Age-Sensitive Elastomeric Materials |

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

| | |
|---|---|
| ASTME380 | Metric Practice Guide |

(Application for copies should be addressed to the Americal Society for Testing and Materials, 1916 Race St., Philadelphia, PA 19103.)

| | |
|---|---|
| ANSIC82.3 | Fluorescent Lamp Reference Ballasts, Specification For |
| ANSIC78.376 | Chromaticity of Fluorescent Lamps, Specification For |
| ANSIC78. Series | Dimensional and Electrical Characteristics of fluorescent Lamps |

(Application for copies should be addressed to the American National Standards Institute, New York, NY 10018.)



Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

## 3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Lamps.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

## 4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for Lamps, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Lamps.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Lamps.

4.3.2 Illustrations. Illustrations applicable to Lamps are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance is using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

## 5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has a capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table II provides codes for column headings which may be used for Lamps characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE II. TABULATION CANDIDATES.

| CODE | COLUMN HEADING | CODE | COLUMN HEADING | CODE | COLUMN HEADING |
|---|---|---|---|---|---|
| 1562 | INIT RATED WATTS | 1570 | NOM INIT MAJ FIL WATTS | 1572 | NOM INIT MIN FIL WATTS |
| 1576 | MIN RATED V VOLTS | 1578 | MAX RATED V VOLTS | 1580 | NOM RATED V VOLTS |
| 1582 | NOM RATED V MAJ FIL VOLTS | 1584 | NOM RATED V MIN FIL VOLTS | 1586 | MIN RATED CURRENT AMPERES |
| 1588 | MAX RATED CURRENT AMPERES | 1590 | NOM RATED CURRENT AMPERES | 1591 | NOM RATED CURRENT (MA) |
| 1592 | NOM RATED CURRENT MAJ FIL AMPERES | 1594 | NOM RATED CURRENT MIN FIL AMPERES | 1600 | MIN LIFE AT RATED V (HOURS) |
| 1602 | NOM LIFE AT RATED V (HOURS) | 1608 | NOM LIFE MAJ FIL AT RATED V (HOURS) | 1610 | NOM LIFE MIN FIL AT RATED V (HOURS) |
| 1612 | RATED LT MAINT DUR (HOURS) | 1614 | RATED LT MAINT MIN OF LT OUT (PERCENT) | 1616 | SINGLE FIL DESIGN TYP |
| 1618 | SINGLE FIL ILLUS REF (NUMBER) | 1620 | MAJ FIL DESIGN TYP (NUMBER) | 1622 | MAJ FIL ILLUS REF (NUMBER) |
| 1624 | MINOR FIL DESIGN TYP (NUMBER) | 1626 | MINOR FIL ILLUS REF (NUMBER) | 1630 | FILAMENT HEIGHT (MM) |
| 1646 | FILAMENT HEIGHT (INCHES) | 1636 | FILAMENT WIDTH (MM) | 1633 | FILAMENT WIDTH (INCHES) |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE II. TABULATION CANDIDATES. (CONT)

| CODE | COLUMN HEADING | CODE | COLUMN HEADING | CODE | COLUMN HEADING |
|---|---|---|---|---|---|
| 1690 | COVER GL (TYPE) | 1692 | COVER GL ILLUS (DES) | 1694 | MAX BEAM AXIS DEV FROM MECH AXIS (DEGREES) |
| 1696 | LT CTR LENGTH (INCHES) | 1701 | LT CTR LENGTH (MM) | 1846 | EMITTED COLOR |
| 1848 | AVIATION COLOR | 1850 | ID COLOR | 1621 | INIT LT OP RTG CANDLE PER WATT |
| 1623 | INIT LT OP RTG LUMENS PER WATT | 1625 | INIT LT OP RTG MEAN SPHER CP | 1627 | INIT LT OP FT CANDLES |
| 1629 | INIT LT OP FT LAMBERT | 1680 | INIT LT OP LAMBERTS | 1682 | INIT LT OP CANDELAS PER SQ MTR |
| 1684 | INIT LT OP LUMENS PER SQ METER | 1686 | INIT LT OP (LUX) | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.5 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and coces. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, the requester will refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Specific instructions on how to fill-in any one type of characteristic value are in DOD-STD-35. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.5.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraphs, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.5.2 Automatic MSE data. Some statements, such as, Altitude, and Temperature will appear in the printed MSE without the requester having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.5.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

## KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| *REQUESTER'S NAME | 0101 |
| *COMPANY NAME/COMMAND | 0102 |
| *STREET/BUILDING | 0103 |
| *CITY, STATE, ZIP | 0104 |
| *PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE | 0105 |
| *DATE | 1003 |
| *REQUESTER FSCM | 1004 |
| *CONTRACT NUMBER/OFFICE SYMBOL | 1005 |
| *BASE DOCUMENT | 1006 |
| *SYSTEM APPLICATION | 1008 |
| *GOVERNMENT DESIGN ACTIVITY FSCM | 6369 |
| *FORMAT (SELECT ONE) | |
| SIX SECTION DOCUMENT | 0700 |
| ONE SECTION DOCUMENT | 0800 |
| *CONTROL (SELECT ONE) | |
| SOURCE. | 6873 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 0101 | 0101. |
| 0102 | 0102. |
| 0103 | 0103. |
| 0104 | 0104. |
| 0105 | 0105. |
| 1003 | 1003. |
| 1004 | USER(S) FSCM(S) 1004. |
| 1005 | CONTRACT NUMBER OR OFFICE SYMBOL 1005. |
| 1006 | THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN. |
| 1008 | SYSTEM APPLICATION 1008. |
| 6369 | GOVERNMENT DESIGN ACTIVITY FSCM 6369. |
| 0700 | |
| 0800 | |
| | SOURCE(S). |
| 6873 | THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCEIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED. |



Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| CONTROL (CONT) | |
| SPECIFICATION. | 6874 |
| *SOURCE TABLE | |
| NOTE: REFER TO TABLE V OF DOD-STD-35. | |
| APERTURE CARDS REQUIRED. | 0107 |
| REVISION OF AEDPS DOCUMENT (NUMBER) | 0108 |
| SCOPE | |
| NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED. | |
| PART NUMBER | |
| NOTE: AUTOMATIC WITH A SINGLE ITEM MSE. | |
| NOTE: AUTOMATIC WITH A MULTI-ITEM MSE. | |
| UNITS OF MEASURE (SELECT ONE) | |
| U.S. | 6941 |
| SI. | 6942 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 6874 | THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S). |
| 0107 | |
| 0108 | 0108. SCOPE. SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE. |
| | PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER. |
| | PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER. |
| 6941 | UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED. |
| 6942 | UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED. |


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| CLASSIFICATION | |
| PER BASE DOCUMENT | |
| TYPE (DESIGNATION) | 1565 |
| RATINGS | |
| INITIAL WATTAGE | |
| (WATTS) | 1562 |
| TOLERANCE (WATTS) | 1567 |
| NOMINAL MAJOR FILAMENT (WATTS) | 1570 |
| NOMINAL MINOR FILAMENT (WATTS) | 1572 |
| RATED VOLTAGE | |
| MINIMUM (VOLTS) | 1576 |
| MAXIMUM (VOLTS) | 1578 |
| NOMINAL (VOLTS) | 1580 |
| NOMINAL MAJOR FILAMENT (VOLTS) | 1582 |
| NOMINAL MINOR FILAMENT (VOLTS) | 1584 |
| RATED CURRENT | |
| MINIMUM (AMPERES) | 1586 |
| MAXIMUM (AMPERES) | 1588 |



Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| | CLASSIFICATION. |
| 1565 | TYPE 1565 SHALL BE IN ACCORDANCE WITH BASE DOCUMENT. |
| | RATINGS. |
| | INITIAL WATTAGE. |
| 1562 | THE INITIAL WATTAGE RATING SHALL BE 1562 WATTS. |
| 1567 | THE INITIAL WATTAGE RATING TOLERANCE SHALL BE 1567 WATTS. |
| 1570 | THE MAJOR FILAMENT NOMINAL WATTAGE RATING SHALL BE 1570 WATTS. |
| 1572 | THE MINOR FILAMENT NOMINAL WATTAGE RATING SHALL BE 1572 WATTS. |
| | RATED VOLTAGE. |
| 1576 | THE RATED VOLTAGE SHALL BE NOT LESS THAN 1576 VOLTS. |
| 1578 | THE RATED VOLTAGE SHALL BE NOT GREATER THAN 1578 VOLTS. |
| 1580 | THE NOMINAL RATED VOLTAGE SHALL BE 1580 VOLTS. |
| 1582 | THE MAJOR FILAMENT NOMINAL VOLTAGE RATING SHALL BE 1582 VOLTS. |
| 1584 | THE MINOR FILAMENT NOMINAL VOLTAGE RATING SHALL BE 1584 VOLTS. |
| | RATED CURRENT |
| 1586 | THE RATED CURRENT SHALL BE NOT LESS THAN 1586 AMPERES. |
| 1588 | THE RATED CURRENT SHALL BE NOT GREATER THAN 1588 AMPERES. |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| RATINGS (CONT) | |
| RATED CURRENT (CONT) | |
| NOMINAL (SELECT ONE) | |
| (AMPERES) | 1590 |
| (MILLIAMPERES) | 1591 |
| NOMINAL MAJOR FILAMENT (AMPERES) | 1592 |
| NOMINAL MINOR FILAMENT (AMPERES) | 1594 |
| RATED LIFE | |
| LIFE AT RATED VOLTAGE | |
| MINIMUM (HOURS) | 1600 |
| NOMINAL (HOURS) | 1602 |
| NOMINAL LIFE (HOURS) | 1604 |
| *NOMINAL OPERATING VOLTAGE (VOLTS) | 1606 |
| NOMINAL LIFE AT RATED VOLTAGE | |
| MAJOR FILAMENT (HOURS) | 1608 |
| MINOR FILAMENT (HOURS) | 1610 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 1590 | THE NOMINAL RATED CURRENT SHALL BE 1590 AMPERES. |
| 1591 | THE NOMINAL RATED CURRENT SHALL BE 1591 MILLIAMPERES. |
| 1592 | THE MAJOR FILAMENT NOMINAL RATED CURRENT SHALL BE 1592 AMPERES. |
| 1594 | THE MINOR FILAMENT NOMINAL RATED CURRENT SHALL BE 1594 AMPERES. |
| | RATED LIFE. |
| 1600 | THE RATED LIFE SHALL BE NOT LESS THAN 1600 HOURS WHEN OPERATED AT RATED VOLTAGE. |
| 1602 | THE NOMINAL RATED LIFE SHALL BE 1602 HOURS WHEN OPERATED AT RATED VOLTAGE. |
| 1604 1606 | THE NOMINAL RATED LIFE SHALL BE 1604 HOURS WHEN OPERATED AT A NOMINAL RATED VOLTAGE OF 1606 VOLTS. |
| 1608 | THE NOMINAL LIFE OF THE MAJOR FILAMENT AT RATED VOLTAGE SHALL BE 1608 HOURS. |
| 1610 | THE NOMINAL LIFE OF THE MINOR FILAMENT AT RATED VOLTAGE SHALL BE 1610 HOURS. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

## KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| RATINGS (CONT) | |
| REQUIRED LIFE | |
| (HOURS) | 1670 |
| MINIMUM RATED LIGHT AT 100 HOURS (SELECT ONE) | |
| (LUMENS) | 1672 |
| (LUX) | 1674 |
| (CANDELA) | 1676 |
| RATED LIGHT MAINTENANCE | |
| MINIMUM LIGHT OUTPUT (PERCENT OF INITIAL LIGHT OUTPUT) | 1612 |
| *DURATION (HOURS) | 1614 |
| MINIMUM RATED LIGHT AT 40 PERCENT LIFE (SELECT ONE) | |
| (LUMENS) | 1615 |
| (LUX) | 1617 |
| (CANDELA) | 1619 |
| INITIAL LIGHT OUTPUT RATING (SELECT ONE) | |
| CANDLES PER WATT (QUANTITY) | 1621 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1670 REQUIRED LIFE. THE REQUIRED LIFE OF THE LAMP SHALL BE 1670 HOURS.

MINIMUM RATED LIGHT AT 100 HOURS.

1672 THE RATED LIGHT AT 100 HOURS SHALL BE NOT LESS THAN 1672 LUMENS.

1674 THE RATED LIGHT AT 100 HOURS SHALL BE NOT LESS THAN 1674 LUX.

1676 THE RATED LIGHT AT 100 HOURS SHALL BE NOT LESS THAN 1676 CANDELA(S).

RATED LIGHT MAINTENANCE.

1612 1614 THE LIGHT OUTPUT SHALL BE NOT LESS THAN 1612 PERCENT OF INITIAL OUTPUT AFTER A NOMINAL OPERATING DURATION OF 1614 HOUR(S).

1615 THE LIGHT RATED AT 40 PERCENT LIFE SHALL BE NOT LESS THAN 1615 LUMENS.

1617 THE LIGHT RATED AT 40 PERCENT LIFE SHALL BE NOT LESS THAN 1617 LUX.

1619 THE LIGHT RATED AT 40 PERCENT LIFE SHALL BE NOT LESS THAN 1619 CANDELA(S).

INITIAL LIGHT OUTPUT RATING.

1621 THE INITIAL LIGHT OUTPUT SHALL BE RATED AT 1621 CANDLES PER WATT.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| RATINGS (CONT) | |
| INITIAL LIGHT OUTPUT RATING (CONT) | |
| LUMENS PER WATT (QUANTITY) | 1623 |
| MEAN SPHERICAL CANDLEPOWER (QUANTITY) | 1625 |
| FOOT CANDLES (QUANTITY) | 1627 |
| FOOT LAMBERTS (QUANTITY) | 1629 |
| LAMBERTS (QUANTITY) | 1680 |
| CANDALAS PER SQUARE METER (QUANTITY) | 1682 |
| LUMENS PER SQUARE METER (QUANTITY) | 1684 |
| LUX (QUANTITY) | 1686 |
| CONFIGURATION | |
| (ILLUSTRATION NUMBER), SEE APPENDIX A | 1009 |
| *UNITS (SELECT ONE) | |
| U.S. | |
| INCHES. | 7572 |
| SI | |
| MILLIMETERS. | 7577 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 1623 | THE INITIAL LIGHT OUTPUT SHALL BE RATED AT 1623 LUMENS PER WATT. |
| 1625 | THE INITIAL LIGHT OUTPUT SHALL BE RATED AT 1625 MEAN SPHERICAL CANDLEPOWER. |
| 1627 | THE INITIAL LIGHT OUTPUT SHALL BE RATED AT 1627 FOOT CANDLES. |
| 1629 | THE INITIAL LIGHT OUTPUT SHALL BE RATED AT 1629 FOOT LAMBERTS. |
| 1680 | THE INITIAL LIGHT OUTPUT SHALL BE RATED AT 1680 LAMBERTS. |
| 1682 | THE INITIAL LIGHT OUTPUT SHALL BE RATED AT 1682 CANDALAS PER SQUARE METER. |
| 1684 | THE INITIAL LIGHT OUTPUT SHALL BE RATED AT 1684 LUMENS PER METER. |
| 1686 | THE INITIAL LIGHT OUTPUT SHALL BE RATED AT 1686 LUX. |
| | CONFIGURATION. |
| 1009 | CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009. |
| 7572 | ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES. |
| 7577 | ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS, OR DEGREES. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| ILLUSTRATIONS | |
| (NUMBER), SEE APPENDIX A | 4950 |
| NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS. | |
| TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35) | |
| MATERIALS (SEE TABLES VI AND VII, DOD-STD-35) | |
| NOTE: AUTOMATIC WHEN TABLE VII IS USED. | |
| FINISHES (SEE TABLES VIII AND IX, DOD-STD-35) | |
| NOTE: AUTOMATIC WHEN TABLE IX IS USED. | |
| DESIGN AND CONSTRUCTION | |
| FILAMENT (SELECT ONE) | |
| SINGLE FILAMENT | |
| STYLE (NUMBER) | 1616 |
| *ILLUSTRATION (NUMBER) | 1618 |
| NOTE: SEE APPENDIX A | |
| MULTIPLE FILAMENT | |
| MAJOR FILAMENT STYLE (NUMBER) | 1620 |
| *ILLUSTRATION (NUMBER) | 1622 |
| NOTE: SEE APPENDIX A | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 4950 | ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS. |

MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

DESIGN AND CONSTRUCTION.

FILAMENT.

| | |
|---|---|
| 1616<br>1618 | THE SINGLE FILAMENT STYLE NUMBER SHALL BE 1616,<br>ILLUSTRATION 1618. |
| 1620<br>1622 | THE MAJOR FILAMENT STYLE NUMBER SHALL BE 1620,<br>ILLUSTRATION 1622. |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| DESIGN AND CONSTRUCTION (CONT) | |
| MULTIPLE FILAMENT (CONT) | |
| MINOR FILAMENT STYLE (NUBMER) | 1624 |
| *ILLUSTRATION (NUMBER) | 1626 |
| NOTE: SEE APPENDIX A | |
| SHIELDED FILAMENT | |
| NOMINAL HEIGHT (SELECT ONE) | |
| (INCHES) | 1646 |
| TOLERANCE (INCH) | 1648 |
| (MILLIMETERS) | 1630 |
| TOLERANCE (MILLIMETER) | 1631 |
| NOMINAL WIDTH (SELECT ONE) | |
| (INCHES) | 1633 |
| TOLERANCE (INCH) | 1635 |
| (MILLIMETERS) | 1636 |
| TOLERANCE (MILLIMETER) | 1637 |
| BASE STYLE | |
| ILLUSTRATION (DESIGNATION) | 1643 |
| NOTE: SEE APPENDIX A | |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 1624<br>1626 | THE MINOR FILAMENT STYLE NUMBER SHALL BE 2624, ILLUSTRATION 1626. |
| 1646 | THE NOMINAL HEIGHT OF THE SHIELDED FILAMENT SHALL BE 1646 INCHES. |
| 1648 | THE HEIGHT TOLERANCE OF THE SHIELDED FILAMENT SHALL BE 1648 INCH. |
| 1630 | THE NOMINAL HEIGHT OF THE SHIELDED FILAMENT SHALL BE 1630 MILLIMETERS. |
| 1631 | THE HEIGHT TOLERANCE OF THE SHIELDED FILAMENT SHALL BE 1631 MILLIMETER. |
| 1633 | THE NOMINAL WIDTH OF THE SHIELDED FILAMENT SHALL BE 1633 INCHES. |
| 1635 | THE WIDTH TOLERANCE OF THE SHIELDED FILAMENT SHALL BE 1635 INCH. |
| 1636 | THE NOMINAL WIDTH OF THE SHIELDED FILAMENT SHALL BE 1636 MILLIMETERS. |
| 1637 | THE WIDTH TOLERANCE OF THE SHIELDED FILAMENT SHALL BE 1637 MILLIMETER. |
| | BASE STYLE. |
| 1643 | THE LAMP BASE STYLE SHALL BE 1643. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| DESIGN AND CONSTRUCTION (CONT) | |
| LAMP BURNING POSITION (SELECT ONE) | |
| BASE UP. | 1650 |
| BASE DOWN. | 1652 |
| BASE DOWN TO HORIZONTAL. | 1654 |
| HORIZONTAL. | 1656 |
| ANY POSITION. | 1658 |
| COVER GLASS | |
| (TYPE) | 1690 |
| ILLUSTRATION (DESIGNATION) | 1692 |
| NOTE: SEE APPENDIX A | |
| MAXIMUM BEAM AXIS DEVIATION | |
| FROM MECHANICAL AXIS (DEGREES) | 1694 |
| LIGHT CENTER LENGTH (SELECT ONE) | |
| (INCHES) | 1696 |
| TOLERANCE (INCH) | 1697 |
| (MILLIMETERS) | 1701 |
| TOLERANCE (MILLIMETER) | 1703 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| | LAMP BURNING POSITION. |
| 1650 | THE LAMP BURNING POSITION SHALL BE WITH BASE UP. |
| 1652 | THE LAMP BURNING POSITION SHALL BE WITH BASE DOWN. |
| 1654 | THE LAMP BURNING POSITION SHALL BE WITH BASE DOWN TO HORIZONTAL. |
| 1656 | THE LAMP BURNING POSITION SHALL BE HORIZONTAL. |
| 1658 | THE LAMP SHALL BE DESIGNED TO OPERATE IN ANY POSITION. |
| | COVER GLASS TYPE. |
| 1690 | THE LAMP COVER GLASS TYPE SHALL BE 1690. |
| 1692 | THE LAMP COVER GLASS SHALL BE IN ACCORDANCE WITH ILLUSTRATION 1692. |
| | MAXIMUM BEAM AXIS DEVIATION. |
| 1694 | THE DEVIATION OF BEAM AXIS FROM THE MECHANICAL AXIS SHALL BE NOT GREATER THAN 1694 DEGREES. |
| | LIGHT CENTER LENGTH. |
| 1696 | THE LIGHT CENTER LENGTH FROM THE CENTER OF THE HIGHER SOURCE TO THE REFERENCE POINT SHALL BE 1696 INCHES. |
| 1697 | THE LIGHT CENTER LENGTH TOLERANCE SHALL BE 1697 INCH. |
| 1701 | THE LIGHT CENTER LENGTH FROM THE CENTER OF THE HIGHER SOURCE TO THE REFERENCE POINT SHALL BE 1701 MILLIMETERS. |
| 1703 | THE LIGHT CENTER LENGTH TOLERANCE SHALL BE 1703 MILLIMETER. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| DESIGN AND CONSTRUCTION (CONT) | |
| LIGHT CENTER LENGTH (CONT) | |
| REFERENCE POINT FROM CENTER OF LIGHT SOURCE (SELECT ONE) | |
| BOSSES ON PREFOCUSING COLLAR. | 1702 |
| BOTTOM OF BASE CONTACT. | 1704 |
| TOP OF BASE PIN. | 1706 |
| BASE FLANGE. | 1708 |
| TOP OF INDEXING PIN. | 1710 |
| END OF BULB ENVELOPE. | 1712 |
| PRODUCT IDENTIFICATION | |
| RATING MARK LOCATION (SELECT ONE) | |
| BASE. | 1720 |
| BULB. | 1722 |
| REFLECTOR COATING. | 1724 |
| MANUFACTURER'S NAME OR TRADEMARK (SELECT ONE) | |
| BASE. | 1726 |
| BULB. | 1728 |
| REFLECTOR COATING. | 1730 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 1702 | THE REFERENCE POINT SHALL BE BOSSES ON PREFOCUSING COLLAR. |
| 1704 | THE REFERENCE POINT SHALL BE BOTTOM OF BASE CONTACT. |
| 1706 | THE REFERENCE POINT SHALL BE TOP OF BASE PIN. |
| 1708 | THE REFERENCE POINT SHALL BE BASE FLANGE. |
| 1710 | THE REFERENCE POINT SHALL BE TOP OF INDEXING PIN. |
| 1712 | THE REFERENCE POINT SHALL BE AT THE END OF THE BULB ENVELOPE. |
| | PRODUCT IDENTIFICATION. |
| 1720 | THE LAMP RATING SHALL BE MARKED ON THE BASE. |
| 1722 | THE LAMP RATING SHALL BE MARKED ON THE BULB. |
| 1724 | THE LAMP RATING SHALL BE MARKED ON THE REFLECTOR COATING. |
| 1726 | MANUFACTURER'S NAME OR TRADE-MARK SHALL BE MARKED ON THE BASE. |
| 1728 | MANUFACTURER'S NAME OR TRADE-MARK SHALL BE MARKED ON THE BULB. |
| 1730 | MANUFACTURER'S NAME OR TRADE-MARK SHALL BE MARKED ON THE REFLECTOR COATING. |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| DESIGN AND CONSTRUCTION (CONT) | |
| PRODUCT IDENTIFICATION (CONT) | |
| TRADE NUMBER LOCATION (SELECT ONE) | |
| BASE. | 1732 |
| BULB. | 1734 |
| REFLECTOR COATING. | 1736 |
| LAMP SERIAL NUMBER MARKED. | 1738 |
| ON BULB | |
| EMITTED COLOR. | 1750 |
| LAMP TYPE. | 1752 |
| NOMINAL WATTS. | 1754 |
| NOMINAL LENGTH. | 1756 |
| MARKING PERMANENCE AND LEGIBILITY | |
| PER MIL-STD-130. | 1740 |
| FLUORESCENT BULB TYPE (SELECT ONE) | |
| T-5. | 1741 |
| T-8. | 1743 |
| T-9. | 1745 |
| T-10. | 1747 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 1732 | THE LAMP TRADE NUMBER SHALL BE MARKED ON THE BASE. |
| 1734 | THE LAMP TRADE NUMBER SHALL BE MARKED ON THE BULB. |
| 1736 | THE LAMP TRADE NUMBER SHALL BE MARKED ON THE REFLECTOR COATING. |
| 1738 | LAMP SERIAL NUMBERS SHALL BE MARKED. |
| 1750 | EMITTED COLOR SHALL BE MARKED ON THE BULB. |
| 1752 | THE LAMP TYPE SHALL BE MARKED ON THE BULB. |
| 1754 | NOMINAL WATTS SHALL BE MARKED ON THE BULB. |
| 1756 | NOMINAL LENGTH SHALL BE MARKED ON THE BULB. |
| 1740 | MARKING PERMANENCE OF PRINTING AND LEGIBILITY SHALL BE IN ACCORDANCE WITH MIL-STD-130. |
| | FLUORESCENT BULB TYPE. |
| 1741 | THE FLUORESCENT BULB TYPE SHALL BE T-5. |
| 1743 | THE FLUORESCENT BULB TYPE SHALL BE T-8. |
| 1745 | THE FLUORESCENT BULB TYPE SHALL BE T-9. |
| 1747 | THE FLUORESCENT BULB TYPE SHALL BE T-10. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| DESIGN AND CONSTRUCTION (CONT) | |
| FLUORESCENT BULB TYPE (CONT) | |
| T-12. | 1749 |
| T-17. | 1751 |
| OTHER ____ | 1758 |
| MERCURY CONTENT (SELECT ONE) | |
| MAXIMUM (MILLIGRAMS) | 1753 |
| MANUFACTURER'S CERTIFICATION REQUIRED. | 1755 |
| FLUORESCENT CHARACTERISTICS | |
| PER ANSIC78. SERIES (NUMBER) | 1760 |
| STARTING METHOD (SELECT ONE) | |
| PREHEAT. | 1762 |
| INSTANT. | 1764 |
| RAPID. | 1766 |
| FLUORESCENT BALLASTS | |
| PER ANSIC82.3. | 1768 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE | STANDARD PARAGRAPH

1749 THE FLUORESCENT BULB TYPE SHALL BE T-12.

1751 THE FLUORESCENT BULB TYPE SHALL BE 5-17.

1758 THE FLUORESCENT BULB TYPE SHALL BE 1758.

MERCURY CONTENT.

1753 THE MERCURY CONTENT SHALL BE NOT GREATER THAN 1753 MILLIGRAMS.

1755 MANUFACTURER'S CERTIFICATION SHALL BE REQUIRED TO ASSURE THAT THE MERCURY CONTENT IS NOT GREATER THAN THE ALLOWABLE LIMIT.

FLUORESCENT CHARACTERISTICS

1760 FLUORESCENT LAMP CHARACTERISTICS SHALL BE IN ACCORDANCE WITH ANSIC78. SERIES NUMBER 1760.

1762 THE LAMP SHALL BE PREHEAT STARTING.

1764 THE LAMP SHALL BE INSTANT STARTING.

1766 THE LAMP SHALL BE RAPID STARTING.

FLUORESCENT BALLASTS.

1768 FLUORESCENT LAMP BALLASTS SHALL BE IN ACCORDANCE WITH ANSIC82.3.



Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| ALTITUDE | |
| OPERATING (SELECT ONE) | |
| SEA LEVEL TO (FEET) | 6790 |
| SEA LEVEL TO (METERS) | 6791 |
| NONOPERATING (SELECT ONE) | |
| SEA LEVEL TO (FEET) | 6792 |
| SEA LEVEL TO (METERS) | 6793 |
| TEMPERATURE | |
| MAXIMUM OPERATING (DEGREES CELSIUS) | 6794 |
| MAXIMUM NONOPERATING (DEGREES CELSIUS) | 6795 |
| MAXIMUM STORAGE (DEGREES CELSIUS) | 6796 |
| MAXIMUM SERVICE (DEGREES CELSIUS) | 6797 |
| MAXIMUM AMBIENT OPERATING (DEGREES CELSIUS) | 6798 |
| MINIMUM OPERATING (DEGREES CELSIUS) | 6799 |
| MINIMUM STORAGE (DEGREES CELSIUS) | 6801 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 6790 | OPERATING ALTITUDE. THE OPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6790 FEET. |
| 6791 | OPERATING ALTITUDE. THE OPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6791 METERS. |
| 6792 | NONOPERATING ALTITUDE. THE NONOPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6792 FEET. |
| 6793 | NONOPERATING ALTITUDE. THE NONOPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6793 METERS. |
| 6794 | MAXIMUM OPERATING TEMPERATURE. THE OPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6794 DEGREES CELSIUS. |
| 6795 | MAXIMUM NONOPERATING TEMPERATURE. THE NONOPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6795 DEGREES CELSIUS. |
| 6796 | MAXIMUM STORAGE TEMPERATURE. THE STORAGE TEMPERATURE SHALL BE NOT GREATER THAN 6796 DEGREES CELSIUS. |
| 6797 | MAXIMUM SERVICE TEMPERATURE. THE SERVICE TEMPERATURE SHALL BE NOT GREATER THAN 6797 DEGREES CELSIUS. |
| 6798 | MAXIMUM AMBIENT OPERATING TEMPERATURE. THE AMBIENT OPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6798 DEGREES CELSIUS. |
| 6799 | MINIMUM OPERATING TEMPERATURE. THE OPERATING TEMPERATURE SHALL BE NOT LESS THAN 6799 DEGREES CELSIUS. |
| 6801 | MINIMUM STORAGE TEMPERATURE. THE STORAGE TEMPERATURE SHALL BE NOT LESS THAN 6801 DEGREES CELSIUS. |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| TEMPERATURE (CONT) | |
| MINIMUM SERVICE (DEGREES CELSIUS) | 6802 |
| MINIMUM AMBIENT OPERATING (DEGREES CELSIUS) | 6803 |
| NOMINAL STORAGE (DEGREES CELSIUS) | 6804 |
| NOMINAL OPERATING (DEGREES CELSIUS) | 6805 |
| DESIGN RELIABILITY | |
| FAILURE RATE (PERCENT PER 1000 HOURS) | 7025 |
| CONFIDENCE LEVEL (PERCENT) | 7026 |
| RATING TEMPERATURE (DEGREES CELSIUS) | 7029 |
| ELECTRICAL STRESS (SELECT ONE) | |
| VOLTAGE (PERCENT OF RATED) | 7030 |
| LOAD (PERCENT OF RATED) | 7027 |
| POWER (PERCENT OF RATED) | 7028 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 6802 | MINIMUM SERVICE TEMPERATURE. THE SERVICE TEMPERATURE SHALL BE NOT LESS THAN 6802 DEGREES CELSIUS. |
| 6803 | MINIMUM AMBIENT OPERATING TEMPERATURE. THE AMBIENT OPERATING TEMPERATURE SHALL BE NOT LESS THAN 6803 DEGREES CELSIUS. |
| 6804 | NOMINAL STORAGE TEMPERATURE. THE STORAGE TEMPERATURE SHALL BE 6804 DEGREES CELSIUS. |
| 6805 | NOMINAL OPERATING TEMPERATURE. THE OPERATING TEMPERATURE SHALL BE 6805 DEGREES CELSIUS. |
| | DESIGN RELIABILITY. THE ITEM(S) SHALL BE DESIGNED, USING MATERIALS AND MANUFACTURING PROCESSES CAPABLE OF MEETING THE FOLLOWING CONDITIONS: |
| 7025 | THE FAILURE RATE SHALL BE LESS THAN 7025 PERCENT PER 1000 HOURS. |
| 7026 | THE CONFIDENCE LEVEL SHALL BE 7026 PERCENT. |
| 7029 | THE DESIGN RELIABILITY SHALL BE AT A TEMPERATURE OF 7029 DEGREES CELSIUS. |
| 7030 | THE DESIGN RELIABILITY SHALL BE AT 7030 PERCENT OF THE RATED VOLTAGE. |
| 7027 | THE DESIGN RELIABILITY APPLIED LOAD SHALL BE AT 7027 PERCENT OF THE RATED LOAD. |
| 7028 | THE DESIGN RELIABILITY SHALL BE AT 7028 PERCENT OF THE RATED POWER. |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| WEIGHT/MASS | |
| MAXIMUM WEIGHT/MASS PER UNIT (SELECT ONE) | |
| U.S. (SELECT ONE) | |
| (OUNCES) | 7022 |
| (POUNDS) | 7023 |
| SI (SELECT ONE) | |
| (GRAMS) | 7021 |
| (KILOGRAMS) | 7024 |
| NOMINAL WEIGHT/MASS PER UNIT (SELECT ONE) | |
| U.S. (SELECT ONE) | |
| (OUNCES) | 6996 |
| (POUNDS) | 6997 |
| SI (SELECT ONE) | |
| (GRAMS) | 6998 |
| (KILOGRAMS) | 6999 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 7022 | MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S). |
| 7023 | MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S). |
| 7021 | MAXIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S). |
| 7024 | MAXIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S). |
| 6996 | NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6996 OUNCE(S). |
| 6997 | NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6997 POUND(S). |
| 6998 | NOMINAL MASS PER UNIT. THE MASS PER UNIT SHALL BE 6998 GRAM(S). |
| 6999 | NOMINAL MASS PER UNIT. THE MASS PER UNIT SHALL BE 6999 KILOGRAM(S). |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| COATING ADHESION | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 1770 |
| AS FOLLOWS: | 1771 |
| NO EVIDENCE OF DAMAGE OR PEELING FROM THE BULB. | 1772 |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 1780 |
| PER MIL-L-6363. | 1782 |
| TEST PRIOR TO TURN-ON | 1784 |
| OPERATING PERIOD (HOURS) | 1786 |
| OPERATION PERCENT OF RATED LIFE (PERCENT) | 1774 |
| OPERATION PERCENT OF RATED LIFE AFTER HIGH TEMPERATURE TEST (PERCENT) | 1776 |
| COLOR | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 1781 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 1770 | COATING ADHESION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1770. |
| 1771 | COATING ADHESION: THE REQUIREMENT(S) SHALL BE AS FOLLOWS: |
| 1772 | THERE SHALL BE NO EVIDENCE OF DAMAGE OR PEELING FROM THE BULB. |
| 1780 | COATING ADHESION: TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1780. |
| 1782 | COATING ADHESION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-L-6363. |
| 1784 | THE COATING ADHESION TEST SHALL BE PERFORMED PRIOR TO LAMP OPERATION. |
| 1786 | THE COATING ADHESION TEST SHALL BE PERFORMED AFTER 1786 HOUR(S) OF OPERATION. |
| 1774 | THE LAMP SHALL BE OPERATED AT 1774 PERCENT OF RATED LIFE. |
| 1776 | THE LAMP SHALL BE OPERATED AT 1776 PERCENT OF RATED LIFE AFTER THE HIGH TEMPERATURE TEST. |
| 1781 | COLOR. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1781. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| COLOR (CONT) | |
| REQUIREMENTS (CONT) | |
| PER ANSIC78.376 CHROMATICITY | 1783 |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 1785 |
| PER W-L-00116 | 1787 |
| NOMINAL BALLAST RATED VOLTAGE (VOLTS) | 1789 |
| NOMINAL BALLAST RATED CURRENT CAPACITY (MILLIAMPERES) | 1790 |
| NOMINAL STARTER RATED VOLTAGE (VOLTS) | 1791 |
| NOMINAL STARTER RATED WATTAGE (WATTS) | 1792 |
| NOMINAL STARTER PRE-HEAT TIME (SECONDS) | 1793 |
| NOMINAL SPECIMEN SEASONING TIME (HOURS) | 1794 |
| MAXIMUM RMS SUMMATION OF SUPPLY VOLTAGE HARMONIC COMPONENTS PERCENT OF FUNDAMENTAL COMPONENTS (PERCENT) | 1796 |
| TEST TEMPERATURE (DEGREES CELSIUS) | 1798 |
| BALLAST SUPPLY VOLTAGE FREQUENCY (HERTZ) | 1800 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 1783 | COLOR. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE CHROMATICITY REQUIREMENTS OF ANSIC78.376 . |
| 1785 | COLOR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1785. |
| 1787 | COLOR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH W-L-00116. |
| 1789 | THE BALLAST RATED VOLTAGE SHALL BE 1789 VOLTS. |
| 1790 | THE BALLAST RATED CURRENT CAPACITY SHALL BE 1790 MILLIAMPERES |
| 1791 | THE STARTER RATED VOLTAGE SHALL BE 1791 VOLTS. |
| 1792 | THE STARTER RATED WATTAGE SHALL BE 1792 WATTS. |
| 1793 | THE STARTER PREHEAT TIME SHALL BE 1793 SECONDS. |
| 1794 | THE SPECIMENS SHALL BE SEASONED FOR 1794 HOURS. |
| 1796 | THE RMS SUMMATION OF SUPPLY VOLTAGE HARMONIC COMPONENTS SHALL BE NOT GREATER THAN 1796 PERCENT OF FUNDAMENTAL COMPONENTS. |
| 1798 | THE TEST TEMPERATURE SHALL BE 1798 DEGREES CELSIUS. |
| 1800 | THE BALLAST SUPPLY VOLTAGE FREQUENCY SHALL BE 1800 HERTZ. |



Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| COLOR (CONT) | |
| PER W-L-00116 (CONT) | |
| NOMINAL TEST SECTION LENGTH INSPECTION (SELECT ONE) | |
| (INCHES) | 1802 |
| (MILLIMETERS) | 1804 |
| ELECTRICAL | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 1806 |
| AS FOLLOWS: | 1808 |
| SINGLE FILAMENT WATTAGE | |
| NOMINAL (WATTS) | 1810 |
| MINIMUM (WATTS) | 1812 |
| MAXIMUM (WATTS) | 1814 |
| MAJOR FILAMENT WATTAGE | |
| NOMINAL (WATTS) | 1816 |
| MINIMUM (WATTS) | 1818 |
| MAXIMUM (WATTS) | 1820 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 1802 | THE SPECIMEN MID-SECTION LENGTH OF 1802 INCHES SHALL BE INSPECTED. |
| 1804 | THE SPECIMEN MID-SECTION LENGTH OF 1804 MILLIMETERS SHALL BE INSPECTED. |
| 1806 | ELECTRICAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1806. |
| 1808 | ELECTRICAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS: |
| 1810 | THE SINGLE FILAMENT WATTAGE SHALL BE 1810 WATTS. |
| 1812 | THE SINGLE FILAMENT WATTAGE SHALL BE NOT LESS THAN 1812 WATTS. |
| 1814 | THE SINGLE FILAMENT WATTAGE SHALL BE NOT GREATER THAN 1814 WATTS. |
| 1816 | THE MAJOR FILAMENT WATTAGE SHALL BE 1816 WATTS. |
| 1818 | THE MAJOR FILAMENT WATTAGE SHALL BE NOT LESS THAN 1818 WATTS. |
| 1820 | THE MAJOR FILAMENT WATTAGE SHALL BE NOT GREATER THAN 1820 WATTS. |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| ELECTRICAL (CONT) | |
| AS FOLLOWS: (CONT) | |
| MINOR FILAMENT WATTAGE | |
| NOMINAL (WATTS) | 1822 |
| MINIMUM (WATTS) | 1824 |
| MAXIMUM (WATTS) | 1826 |
| SINGLE FILAMENT CURRENT | |
| NOMINAL (AMPERES) | 1828 |
| MINIMUM (AMPERES) | 1830 |
| MAXIMUM (AMPERES) | 1832 |
| MAJOR FILAMENT CURRENT | |
| NOMINAL (AMPERES) | 1834 |
| MINIMUM (AMPERES) | 1836 |
| MAXIMUM (AMPERES) | 1838 |
| MINOR FILAMENT CURRENT | |
| NOMINAL (AMPERES) | 1840 |
| MINIMUM (AMPERES) | 1842 |
| MAXIMUM (AMPERES) | 1844 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 1822 | THE MINOR FILAMENT WATTAGE SHALL BE 1822 WATTS. |
| 1824 | THE MINOR FILAMENT WATTAGE SHALL BE NOT LESS THAN 1824 WATTS. |
| 1826 | THE MINOR FILAMENT WATTAGE SHALL BE NOT GREATER THAN 1826 WATTS. |
| 1828 | THE SINGLE FILAMENT CURRENT SHALL BE 1828 AMPERES. |
| 1830 | THE SINGLE FILAMENT CURRENT SHALL BE NOT LESS THAN 1830 AMPERES. |
| 1832 | THE SINGLE FILAMENT CURRENT SHALL BE NOT GREATER THAN 1832 AMPERES. |
| 1834 | THE MAJOR FILAMENT CURRENT SHALL BE 1834 AMPERES. |
| 1836 | THE MAJOR FILAMENT CURRENT SHALL BE NOT LESS THAN 1836 AMPERES. |
| 1838 | THE MAJOR FILAMENT CURRENT SHALL BE NOT GREATER THAN 1838 AMPERES. |
| 1840 | THE MINOR FILAMENT CURRENT SHALL BE 1840 AMPERES. |
| 1842 | THE MINOR FILAMENT CURRENT SHALL BE NOT LESS THAN 1842 AMPERES. |
| 1844 | THE MINOR FILAMENT CURRENT SHALL BE NOT GREATER THAN 1844 AMPERES. |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| ELECTRICAL (CONT) | |
| AS FOLLOWS: (CONT) | |
| SINGLE FILAMENT VOLTAGE | |
| NOMINAL (VOLTS) | 1845 |
| MIMIMUM (VOLTS) | 1848 |
| MAXIMUM (VOLTS) | 1850 |
| MAJOR FILAMENT VOLTAGE | |
| NOMINAL (VOLTS) | 1852 |
| MINIMUM (VOLTS) | 1854 |
| MAXIMUM (VOLTS) | 1856 |
| MINOR FILAMENT VOLTAGE | |
| NOMINAL (VOLTS) | 1858 |
| MINIMUM (VOLTS) | 1860 |
| MAXIMUM (VOLTS) | 1862 |
| MINIMUM LIGHT OUTPUT PER WATT (SELECT ONE) | |
| CANDLEPOWER (QUANTITY) | 1864 |
| LUMENS (QUANTITY) | 1866 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 1845 | THE SINGLE FILAMENT VOLTAGE SHALL BE 1845 VOLTS. |
| 1848 | THE SINGLE FILAMENT VOLTAGE SHALL BE NOT LESS THAN 1848 VOLTS. |
| 1850 | THE SINGLE FILAMENT VOLTAGE SHALL BE NOT GREATER THAN 1850 VOLTS. |
| 1852 | THE MAJOR FILAMENT VOLTAGE SHALL BE 1852 VOLTS. |
| 1854 | THE MAJOR FILAMENT VOLTAGE SHALL BE NOT LESS THAN 1854 VOLTS. |
| 1856 | THE MAJOR FILAMENT VOLTAGE SHALL BE NOT GREATER THAN 1856 VOLTS. |
| 1858 | THE MINOR FILAMENT VOLTAGE SHALL BE 1858 VOLTS. |
| 1860 | THE MINOR FILAMENT VOLTAGE SHALL BE NOT LESS THAN 1860 VOLTS. |
| 1862 | THE MINOR FILAMENT VOLTAGE SHALL BE NOT GREATER THAN 1862 VOLTS. |
| 1864 | THE LIGHT OUTPUT PER WATT SHALL BE NOT LESS THAN 1864 CANDLEPOWER. |
| 1866 | THE LIGHT OUTPUT PER WATT SHALL BE NOT LESS THAN 1866 LUMENS. |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| ELECTRICAL (CONT) | |
| MINIMUM LIGHT OUTPUT PER WATT (CONT) | |
| CANDELA (QUANTITY) | 1868 |
| LUX (QUANTITY) | 1870 |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 1900 |
| AS FOLLOWS: | 1902 |
| NOMINAL BURN-IN PERIOD (HOURS) | 1904 |
| SINGLE FILAMENT TEST VOLTAGE | |
| NOMINAL (VOLTS) | 1906 |
| TOLERANCE (VOLTS) | 1908 |
| SINGLE FILAMENT TEST FREQUENCY | |
| NOMINAL (HERTZ) | 1910 |
| MAJOR FILAMENT TEST VOLTAGE | |
| NOMINAL (VOLTS) | 1912 |
| TOLERANCE (VOLTS) | 1914 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 1868 | THE LIGHT OUTPUT PER WATT SHALL BE NOT LESS THAN 1868 CANDELAS. |
| 1870 | THE LIGHT OUTPUT PER WATT SHALL BE NOT LESS THAN 1870 LUX. |
| 1900 | ELECTRICAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1900. |
| 1902 | ELECTRICAL. TESTING SHALL BE PERFORMED AS FOLLOWS: |
| 1904 | THE BURN-IN PERIOD SHALL BE 1904 HOURS. |
| 1906 | THE SINGLE FILAMENT TEST VOLTAGE SHALL BE 1906 VOLTS. |
| 1908 | THE SINGLE FILAMENT TEST VOLTAGE TOLERANCE SHALL BE 1908 VOLTS. |
| 1910 | THE SINGLE FILAMENT TEST FREQUENCY SHALL BE 1910 HERTZ. |
| 1912 | THE MAJOR FILAMENT TEST VOLTAGE SHALL BE 1912 VOLTS. |
| 1914 | THE MAJOR FILAMENT TEST VOLTAGE TOLERANCE SHALL BE 1914 VOLTS. |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| ELECTRICAL (CONT) | |
| AS FOLLOWS: (CONT) | |
| MAJOR FILAMENT TEST FREQUENCY | |
| NOMINAL (HERTZ) | 1916 |
| MINOR FILAMENT TEST VOLTAGE | |
| NOMINAL (VOLTS) | 1918 |
| TOLERANCE (VOLTS) | 1920 |
| MINOR FILAMENT TEST FREQUENCY | |
| NOMINAL (HERTZ) | 1922 |
| PERFORM PORTION OF INITIAL LIGHT OUTPUT TEST (SELECT ONE) | |
| CANDLEPOWER PER WATT. | 1924 |
| MEAN SPHERICAL CANDLEPOWER. | 1926 |
| LUMENS PER WATT. | 1928 |
| LUMENS. | 1930 |
| CANDELA PER SQUARE METER. | 1932 |
| LUX. | 1934 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 1916 | THE MAJOR FILAMENT TEST FREQUENCY SHALL BE 1916 HERTZ. |
| 1918 | THE MINOR FILAMENT TEST VOLTAGE SHALL BE 1918 VOLTS. |
| 1920 | THE MINOR FILAMENT TEST VOLTAGE TOLERANCE SHALL BE 1920 VOLTS. |
| 1922 | THE MINOR FILAMENT TEST FREQUENCY SHALL BE 1922 HERTZ. |
| 1924 | PERFORM CANDLEPOWER PER WATT PORTION OF INITIAL LIGHT OUTPUT TEST. |
| 1926 | PERFORM MEAN SPHERICAL CANDLEPOWER PORTION OF INITIAL LIGHT OUTPUT TEST. |
| 1928 | PERFORM LUMENS PER WATT PORTION OF INITIAL LIGHT OUTPUT TEST. |
| 1930 | PERFORM LUMENS PORTION OF INITIAL LIGHT OUTPUT TEST. |
| 1932 | PERFORM CANDELA PER SQUARE METER PORTION OF INITIAL LIGHT OUTPUT TEST. |
| 1934 | PERFORM LUX PORITON OF INITIAL LIGHT OUTPUT TEST. |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| EMITTED COLOR | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 1841 |
| AS FOLLOWS: | 1843 |
| COLOR (SELECT ONE) | |
| EMITTED COLOR ____ | 1846 |
| PER MIL-C-25050 | |
| AVIATION COLOR ____ | 1851 |
| IDENTIFICATION COLOR ____ | 1853 |
| COLORIMETRIC DEFINITION | |
| MINIMUM | |
| X (NUMBER) | 1855 |
| Y (NUMBER) | 1857 |
| MAXIMUM | |
| X (NUMBER) | 1861 |
| Y (NUMBER) | 1863 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 1841 | EMITTED COLOR. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1841. |
| 1843 | EMITTED COLOR. THE REQUIREMENT(S) SHALL BE AS FOLLOWS: |
| 1846 | THE EMITTED COLOR SHALL BE 1846. |
| 1851 | THE EMITTED AVIATION COLOR SHALL BE 1851 IN ACCORDANCE WITH MIL-C-25050. |
| 1853 | THE EMITTED IDENTIFICATION COLOR SHALL BE 1853 IN ACCORDANCE WITH MIL-C-25050. |
| 1855 | THE COLORIMETRIC DEFINITION X SHALL BE NOT LESS THAN 1855. |
| 1857 | THE COLORIMETRIC DEFINITION Y SHALL BE NOT LESS THAN 1857. |
| 1861 | THE COLORIMETRIC DEFINITION X SHALL BE NOT GREATER THAN 1861. |
| 1863 | THE COLORIMETRIC DEFINITION Y SHALL BE NOT GREATER THAN 1863. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| EMITTED COLOR (CONT) | |
| AS FOLLOWS: (CONT) | |
| TRANSMISSION AND BRIGHTNESS | |
| GRADE LETTER (SELECT ONE) | |
| DIFFUSING (LETTER) | 1872 |
| NONDIFFUSING (LETTER) | 1874 |
| COLOR TEMPERATURE | |
| MINIMUM (DEGREES KELVIN) | 1876 |
| MAXIMUM (DEGREES KELVIN) | 1878 |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 1880 |
| PER MIL-C-25050 | 1882 |
| TEST CONDITION | |
| NOMINAL EMITTED COLOR TEST VOLTAGE | |
| SINGLE FILAMENT (VOLTS) | 1884 |
| TOLERANCE (VOLTS) | 1886 |
| NOMINAL SINGLE FILAMENT FREQUENCY (HERTZ) | 1888 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 1872 | THE DIFFUSING GRADE LETTER SHALL BE 1872. |
| 1874 | THE NONDIFFUSING GRADE LETTER SHALL BE 1874. |
| 1876 | THE COLOR TEMPERATURE SHALL BE NOT LESS THAN 1876 DEGREES KELVIN. |
| 1878 | THE COLOR TEMPERATURE SHALL BE NOT GREATER THAN 1878 DEGREES KELVIN. |
| 1880 | EMITTED COLOR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1880. |
| 1882 | EMITTED COLOR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-25050. |
| 1884 | THE EMITTED COLOR TEST VOLTAGE FOR A SINGLE FILAMENT LAMP SHALL BE 1884 VOLTS. |
| 1886 | THE EMITTED COLOR TEST VOLTAGE TOLERANCE FOR A SINGLE FILAMENT LAMP SHALL BE 1886 VOLTS. |
| 1888 | THE EMITTED COLOR TEST VOLTAGE FREQUENCY FOR A SINGLE FILAMENT LAMP SHALL BE 1888 HERTZ. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| EMITTED COLOR (CONT) | |
| NOMINAL EMITTED COLOR TEST VOLTAGE (CONT) | |
| MAJOR FILAMENT (VOLTS) | 1890 |
| TOLERANCE (VOLTS) | 1892 |
| NOMINAL MAJOR FILAMENT FREQUENCY (HERTZ) | 1894 |
| MINOR FILAMENT (VOLTS) | 1950 |
| TOLERANCE (VOLTS) | 1952 |
| NOMINAL MINOR FILAMENT FREQUENCY (HERTZ) | 1954 |
| NOMINAL EMITTED COLOR TEST CURRENT | |
| SINGLE FILAMENT (AMPERES) | 1956 |
| TOLERANCE (AMPERES) | 1958 |
| NOMINAL SINGLE FILAMENT FREQUENCY (HERTZ) | 1960 |
| MAJOR FILAMENT (AMPERES) | 1962 |
| TOLERANCE (AMPERES) | 1964 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 1890 | THE EMITTED COLOR TEST VOLTAGE FOR THE MAJOR FILAMENT SHALL BE 1890 VOLTS. |
| 1892 | THE EMITTED COLOR TEST VOLTAGE TOLERANCE FOR THE MAJOR FILAMENT SHALL BE 1892 VOLTS. |
| 1894 | THE EMITTED COLOR TEST VOLTAGE FREQUENCY FOR THE MAJOR FILAMENT SHALL BE 1894 HERTZ. |
| 1950 | THE EMITTED COLOR TEST VOLTAGE FOR THE MINOR FILAMENT SHALL BE 1950 VOLTS. |
| 1952 | THE EMITTED COLOR TEST VOLTAGE TOLERANCE FOR THE MINOR FILAMENT SHALL BE 1952 VOLTS. |
| 1954 | THE EMITTED COLOR TEST VOLTAGE FREQUENCY FOR THE MINOR FILAMENT SHALL BE 1954 HERTZ. |
| 1956 | THE EMITTED COLOR TEST CURRENT FOR A SINGLE FILAMENT LAMP SHALL BE 1956 AMPERES. |
| 1958 | THE EMITTED COLOR TEST CURRENT TOLERANCE FOR A SINGLE FILAMENT SHALL BE 1958 AMPERES. |
| 1960 | THE EMITTED COLOR TEST CURRENT FREQUENCY FOR A SINGLE FILAMENT SHALL BE 1960 HERTZ. |
| 1962 | THE EMITTED COLOR TEST CURRENT FOR THE MAJOR FILAMENT SHALL BE 1962 AMPERES. |
| 1964 | THE EMITTED COLOR TEST CURRENT TOLERANCE FOR THE MAJOR FILAMENT SHALL BE 1964 AMPERES. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| EMITTED COLOR (CONT) | |
| NOMINAL EMITTED COLOR TEST CURRENT (CONT) | |
| NOMINAL MAJOR FILAMENT FREQUENCY (HERTZ) | 1966 |
| MINOR FILAMENT (AMPERES) | 1968 |
| TOLERANCE (AMPERES) | 1970 |
| NOMINAL MINOR FILAMENT FREQUENCY (HERTZ) | 1972 |
| MINIMUM TEST TEMPERATURE | 1974 |
| CERTIFIED TEST EQUIPMENT REQUIRED. | 1976 |
| HUMIDITY | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 4798 |
| NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE. | 4799 |
| REMAIN WITHIN SPECIFIED TOLERANCE. | 4791 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 1966 | THE EMITTED COLOR TEST CURRENT FREQUENCY FOR THE MAJOR FILAMENT SHALL BE 1966 HERTZ. |
| 1968 | THE EMITTED COLOR TEST CURRENT FOR THE MINOR FILAMENT SHALL BE 1968 AMPERES. |
| 1970 | THE EMITTED COLOR TEST CURRENT TOLERANCE FOR THE MINOR FILAMENT SHALL BE 1970 AMPERES. |
| 1972 | THE EMITTED COLOR TEST CURRENT FREQUENCY FOR THE MINOR FILAMENT SHALL BE 1972 HERTZ. |
| 1974 | THE TEST TEMPERATURE SHALL BE NOT LESS THAN 1974 DEGREES CELSIUS. |
| 1976 | CERTIFIED TEST EQUIPMENT SHALL BE REQUIRED FOR THE EMITTED COLOR TEST. |
| 4798 | HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798. |
| 4799 | HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE. |
| 4791 | ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| HUMIDITY (CONT) | |
| NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE. (CONT) | |
| REQUIREMENTS DURING TEST | |
| ELECTRICAL REQUIREMENTS. | 2000 |
| INITIAL LIGHT OUTPUT REQUIREMENTS. | 2002 |
| REQUIREMENTS AFTER TEST | |
| ELECTRICAL REQUIREMENTS. | 2004 |
| INITIAL LIGHT OUTPUT REQUIREMENTS. | 2006 |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 4788 |
| PER MIL-STD-810, METHOD 507. | 4871 |
| *PROCEDURE NUMBER (SELECT ONE) | |
| TEST PROCEDURE I. | 4767 |
| EXTREME TEMPERATURE BEFORE TESTING (DEGREES CELSIUS) | 4777 |
| *DURATION OF TEMPERATURE EXPOSURE (HOURS) | 4778 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 2000 | DURING TEST, THE ELECTRICAL REQUIREMENTS SHALL APPLY. |
| 2002 | DURING TEST, THE INITIAL LIGHT OUTPUT REQUIREMENTS SHALL APPLY. |
| 2004 | AFTER TEST, THE ELECTRICAL REQUIREMENTS SHALL APPLY. |
| 2006 | AFTER TEST, THE INITIAL LIGHT OUTPUT REQUIREMENTS SHALL APPLY. |
| 4788 | HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788. |
| 4871 | HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 507 OF MIL-STD-810. |
| 4767 | PROCEDURE NUMBER I SHALL APPLY. |
| 4777 | SPECIMEN(S) SHALL BE EXPOSED TO 4777 DEGREES CELSIUS BEFORE TESTING. |
| 4778 | DURATION OF EXPOSURE TO EXTREME TEMPERATURE SHALL BE 4778 HOUR(S). |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| HUMIDITY (CONT) | |
| PROCEDURE NUMBER (CONT) | |
| TEST PROCEDURE II. | 6334 |
| CYCLE LIMITED TO 24 HOURS DURATION. | 4716 |
| TEST PROCEDURE III. | 6335 |
| TEST PROCEDURE IV. | 6336 |
| TEST RPOCEDURE V. | 6337 |
| NUMBER OF CYCLES (NUMBER) | 4800 |
| WATER PURITY BY CONDUCTIVITY METHOD. | 4764 |
| OPERATION AND MEASUREMENT AT HIGH TEMPERATURE PORTION OF CYCLES (NUMBER) | 4916 |
| INSULATION RESISTANCE CYCLES (NUMBER) | 4919 |
| DIELECTRIC WITHSTANDING VOLTAGE CYCLES (NUMBER) | 4920 |
| OPERATION AND MEASUREMENT AT LOW TEMPERATURE PORTION OF CYCLES (NUMBER) | 1554 |
| INSULATION RESISTANCE CYCLES (NUMBER) | 1555 |
| DIELECTRIC WITHSTANDING VOLTAGE CYCLES (NUMBER) | 1556 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 6334 | PROCEDURE NUMBER II SHALL APPLY. |
| 4716 | CYCLES SHALL BE LIMITED TO 24 HOURS DURATION. |
| 6335 | PROCEDURE NUMBER III SHALL APPLY. |
| 6336 | PROCEDURE NUMBER IV SHALL APPLY. |
| 6337 | PROCEDURE NUMBER V SHALL APPLY. |
| 4800 | THERE SHALL BE 4800 CYCLE(S). |
| 4764 | WATER PURITY SHALL BE DETERMINED BY THE CONDUCTIVITY METHOD. |
| 4916 | OPERATION AND MEASUREMENTS SHALL BE PERFORMED AT HIGH TEMPERATURE DURING CYCLE(S) 4916. |
| 4919 | INSULATION RESISTANCE SHALL BE MEASURED AT CYCLE(S) 4919, AT HIGH TEMPERATURE. |
| 4920 | DIELECTRIC WITHSTANDING VOLTAGE SHALL BE MEASURED AT CYCLE(S) 4920, AT HIGH TEMPERATURE. |
| 1554 | OPERATION AND MEASUREMENTS SHALL BE PERFORMED AT LOW TEMPERATURE, DURING CYCLE(S) 1554. |
| 1555 | INSULATION RESISTANCE SHALL BE MEASURED AT CYCLE(S) 1555, AT LOW TEMPERATURE. |
| 1556 | DIELECTRIC WITHSTANDING VOLTAGE SHALL BE MEASURED AT CYCLE(S) 1556, AT LOW TEMPERATURE. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| HUMIDITY (CONT) | |
| PER MIL-STD-810, METHOD 507. (CONT) | |
| TESTS PRIOR TO HUMIDITY TEST | |
| ELECTRICAL TESTS. | 2010 |
| INITIAL LIGHT OUTPUT TESTS. | 2012 |
| POST HUMIDITY TESTS. | |
| ELECTRICAL TESTS. | 2014 |
| INITIAL LIGHT OUTPUT TESTS. | 2016 |
| TEST INTERVALS | |
| ELECTRICAL TEST PERIOD (HOURS) | 2018 |
| INITIAL LIGHT OUTPUT TEST PERIOD (HOURS) | 2020 |
| IMPACT | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 2100 |
| AS FOLLOWS: | 2102 |
| NO EVIDENCE OF PHYSICAL DAMAGE. | 2103 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 2010 | THE ELECTRICAL TEST(S) SHALL BE PERFORMED PRIOR TO THE HUMIDITY TEST. |
| 2012 | THE INITIAL LIGHT OUTPUT (TEST(S) SHALL BE PERFORMED PRIOR TO THE HUMIDITY TEST. |
| 2014 | THE ELECTRICAL TEST(S) SHALL BE PERFORMED AFTER THE HUMIDITY TEST. |
| 2016 | THE INITIAL LIGHT OUTPUT TEST(S) SHALL BE PERFORMED AFTER THE HUMIDITY TEST. |
| 2018 | THE ELECTRICAL TEST(S) SHALL BE PERFORMED AFTER EACH 2018 HOUR PERIOD. |
| 2020 | THE INITIAL LIGHT OUTPUT TEST(S) SHALL BE PERFORMED AFTER EACH 2020 HOUR PERIOD. |
| 2100 | IMPACT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2100. |
| 2102 | IMPACT. THE REQUIREMENT(S) SHALL BE AS FOLLOWS: |
| 2103 | THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| IMPACT (CONT) | |
| AS FOLLOWS: (CONT) | |
| NO DEGRADATION OF PERFORMANCE. | 2105 |
| POST TEST REQUIREMENTS | |
| ELECTRICAL. | 2108 |
| INITIAL LIGHT OUTPUT. | 2110 |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 2120 |
| PER W-L-111. | 2122 |
| NOMINAL DROP DISTANCE (SELECT ONE) | |
| (INCHES) | 2124 |
| (MILLIMETERS) | 2126 |
| NOMINAL VIBRATION RATE (REVOLUTIONS PER MINUTE) | 2128 |
| NOMINAL VIBRATION TEST PERIOD (HOURS) | 2130 |
| VIBRATION CYCLE (SELECT ONE) | |
| SINGLE FILAMENT LAMP | |
| NOMINAL INITIAL PERIOD UNLIGHTED (MINUTES) | 2132 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 2105 | THERE SHALL BE NO DEGRADATION OF PERFORMANCE. |
| 2108 | THE IMPACT POST TEST REQUIREMENTS SHALL BE IN ACCORDANCE WITH THE ELECTRICAL REQUIREMENTS. |
| 2110 | THE IMPACT POST TEST REQUIREMENTS SHALL BE IN ACCORDANCE WITH THE INITIAL LIGHT OUTPUT REQUIREMENTS. |
| 2120 | IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2120. |
| 2122 | IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH W-L-111. |
| 2124 | THE DROP DISTANCE SHALL BE 2124 INCHES. |
| 2126 | THE DROP DISTANCE SHALL BE 2126 MILLIMETERS. |
| 2128 | THE VIBRATION RATE SHALL BE 2128 REVOLUTIONS PER MINUTE. |
| 2130 | THE VIBRATION TEST PERIOD SHALL BE 2130 HOURS. |
| 2132 | THE INITIAL PERIOD OF THE VIBRATION CYCLE FOR A SINGLE FILAMENT LAMP UNLIGHTED SHALL BE 2132 MINUTES. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| IMPACT (CONT) | |
| SINGLE FILAMENT LAMP (CONT) | |
| NOMINAL SECOND PERIOD LIGHTED (MINUTES) | 2134 |
| NOMINAL FINAL PERIOD UNLIGHTED (MINUTES) | 2136 |
| TWO FILAMENT LAMP | |
| NOMINAL PERIOD WITH FILAMENTS UNLIGHTED (MINUTES) | 2138 |
| NOMINAL PERIOD WITH MINOR FILAMENT OPERATING AT RATED VOLTAGE (MINUTES) | 2140 |
| NOMINAL PERIOD WITH MINOR AND MAJOR FILAMENTS OPERATING AT RATED VOLTAGE (MINUTES) | 2142 |
| MEASUREMENTS AFTER TEST | |
| ELECTRICAL TEST. | 2144 |
| INITIAL LIGHT OUTPUT TEST. | 2146 |
| INITIAL LIGHT OUTPUT | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 2190 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2134 THE SECOND PERIOD OF THE VIBRATION CYCLE FOR A SINGLE FILAMENT LAMP LIGHTED SHALL BE 2134 MINUTES.

2136 THE FINAL PERIOD OF THE VIBRATION CYCLE FOR A SINGLE FILAMENT LAMP UNLIGHTED SHALL BE 2136 MINUTES.

2138 THE PERIOD OF THE VIBRATION CYCLE FOR TWO FILAMENT LAMPS UNLIGHTED SHALL BE 2138 MINUTES.

2140 THE PERIOD OF THE VIBRATION CYCLE FOR A MINOR FILAMENT OPERATING AT RATED VOLTAGE SHALL BE 2140 MINUTES.

2142 THE PERIOD OF THE VIBRATION CYCLE FOR MINOR AND MAJOR FILAMENTS OPERATING AT RATED VOLTAGE SHALL BE 2142 MINUTES.

2144 THE ELECTRICAL TEST SHALL BE PERFORMED AFTER THE IMPACT TEST.

2146 THE INITIAL LIGHT OUTPUT TEST SHALL BE PERFORMED AFTER THE IMPACT TEST.

2190 INITIAL LIGHT OUTPUT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2190.



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| INITIAL LIGHT OUTPUT (CONT) | |
| REQUIREMENTS (CONT) | |
| AS FOLLOWS: | 2192 |
| SINGLE OR MAJOR FILAMENT (DESIGNATION) | 2200 |
| OUTPUT | |
| NOMINAL (SELECT ONE) | |
| (CANDLEPOWER PER WATT) | 2202 |
| (MEAN SPHERICAL CANDLEPOWER) | 2204 |
| (LUMENS) | 2206 |
| (LUMENS PER WATT) | 2208 |
| (CANDELAS PER SQUARE METER) | 2210 |
| (LUX) | 2212 |
| MINIMUM (SELECT ONE) | |
| (CANDLEPOWER PER WATT) | 2214 |
| (MEAN SPHERICAL CANDLEPOWER) | 2216 |
| (LUMENS) | 2218 |
| (LUMENS PER WATT) | 2220 |
| (CANDELAS PER SQUARE METER) | 2222 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 2192 | INITIAL LIGHT OUTPUT. THE REQUIREMENT(S) SHALL BE AS FOLLOWS: |
| 2200 | THE SINGLE OR MAJOR FILAMENT SHALL BE 2200. |
| 2202 | OUTPUT SHALL BE 2202 CANDLEPOWER PER WATT. |
| 2204 | OUTPUT SHALL BE 2204 MEAN SPHERICAL CANDLEPOWER. |
| 2206 | OUTPUT SHALL BE 2206 LUMENS. |
| 2208 | OUTPUT SHALL BE 2208 LUMENS PER WATT. |
| 2210 | OUTPUT SHALL BE 2210 CANDELAS PER SQUARE METER. |
| 2212 | OUTPUT SHALL BE 2212 LUX. |
| 2214 | OUTPUT SHALL BE NOT LESS THAN 2214 CANDLEPOWER PER WATT. |
| 2216 | OUTPUT SHALL BE NOT LESS THAN 2216 MEAN SPHERICAL CANDLEPOWER. |
| 2218 | OUTPUT SHALL BE NOT LESS THAN 2218 LUMENS. |
| 2220 | OUTPUT SHALL BE NOT LESS THAN 2220 LUMENS PER WATT. |
| 2222 | OUTPUT SHALL BE NOT LESS THAN 2222 CANDELAS PER SQUARE METER. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| INITIAL LIGHT OUTPUT (CONT) | |
| MINIMUM (CONT) | |
| (LUX) | 2224 |
| MAXIMUM (SELECT ONE) | |
| (CANDLEPOWER PER WATT) | 2226 |
| (MEAN SPHERICAL CANDLEPOWER) | 2228 |
| (LUMENS) | 2230 |
| (LUMENS PER WATT) | 2232 |
| (CANDELAS PER SQUARE METER) | 2234 |
| (LUX) | 2236 |
| MINOR FILAMENT (DESIGNATION) | 2238 |
| OUTPUT | |
| NOMINAL (SELECT ONE) | |
| (CANDLEPOWER PER WATT) | 2240 |
| (MEAN SPHERICAL CANDLEPOWER) | 2242 |
| (LUMENS) | 2244 |
| (LUMENS PER WATT) | 2246 |
| (CANDELAS PER SQUARE METER) | 2248 |
| (LUX) | 2250 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 2224 | OUTPUT SHALL BE NOT LESS THAN 2224 LUX. |
| 2226 | OUTPUT SHALL BE NOT GREATER THAN 2226 CANDLEPOWER PER WATT. |
| 2228 | OUTPUT SHALL BE NOT GREATER THAN 2228 MEAN SPHERICAL CANDLEPOWER. |
| 2230 | OUTPUT SHALL BE NOT GREATER THAN 2230 LUMENS. |
| 2232 | OUTPUT SHALL BE NOT GREATER THAN 2232 LUMENS PER WATT. |
| 2234 | OUTPUT SHALL BE NOT GREATER THAN 2234 CANDELAS PER SQUARE METER. |
| 2236 | OUTPUT SHALL BE NOT GREATER THAN 2236 LUX. |
| 2238 | THE MINOR FILAMENT SHALL BE 2238. |
| 2240 | OUTPUT SHALL BE 2240 CANDLEPOWER PER WATT. |
| 2242 | OUTPUT SHALL BE 2242 MEAN SPHERICAL CANDLEPOWER. |
| 2244 | OUTPUT SHALL BE 2244 LUMENS. |
| 2246 | OUTPUT SHALL BE 2246 LUMENS PER WATT. |
| 2248 | OUTPUT SHALL BE 2248 CANDELAS PER SQUARE METER. |
| 2250 | OUTPUT SHALL BE 2250 LUX. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| INITIAL LIGHT OUTPUT (CONT) | |
| OUTPUT (CONT) | |
| MINIMUM (SELECT ONE) | |
| (CANDLEPOWER PER WATT) | 2252 |
| (MEAN SPHERICAL CANDLEPOWER) | 2254 |
| (LUMENS) | 2256 |
| (LUMENS PER WATT) | 2258 |
| (CANDELAS PER SQUARE METER) | 2260 |
| (LUX) | 2262 |
| MAXIMUM (SELECT ONE) | |
| (CANDLEPOWER PER WATT) | 2264 |
| (MEAN SPHERICAL CANDLEPOWER) | 2266 |
| (LUMENS) | 2268 |
| (LUMENS PER WATT) | 2270 |
| (CANDELAS PER SQUARE METER) | 2272 |
| (LUX) | 2274 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 2252 | OUTPUT SHALL BE NOT LESS THAN 2252 CANDLEPOWER PER WATT. |
| 2254 | OUTPUT SHALL BE NOT LESS THAN 2254 MEAN SPHERICAL CANDLEPOWER. |
| 2256 | OUTPUT SHALL BE NOT LESS THAN 2256 LUMENS. |
| 2258 | OUTPUT SHALL BE NOT LESS THAN 2258 LUMENS PER WATT. |
| 2260 | OUTPUT SHALL BE NOT LESS THAN 2260 CANDELAS PER SQUARE METER. |
| 2262 | OUTPUT SHALL BE NOT LESS THAN 2262 LUX. |
| 2264 | OUTPUT SHALL BE NOT GREATER THAN 2264 CANDLEPOWER PER WATT. |
| 2266 | OUTPUT SHALL BE NOT GREATER THAN 2266 MEAN SPHERICAL CANDLEPOWER. |
| 2268 | OUTPUT SHALL BE NOT GREATER THAN 2268 LUMENS. |
| 2270 | OUTPUT SHALL BE NOT GREATER THAN 2270 LUMENS PER WATT. |
| 2272 | OUTPUT SHALL BE NOT GREATER THAN 2272 CANDELAS PER SQUARE METER. |
| 2274 | OUTPUT SHALL BE NOT GREATER THAN 2274 LUX. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| INITIAL LIGHT OUTPUT (CONT) | |
| AS FOLLOWS: (CONT) | |
| FLUORESCENT BULB (DESIGNATION) | 2276 |
| OUTPUT | |
| NOMINAL (SELECT ONE) | |
| (LUMENS) | 2278 |
| (CANDELAS PER SQUARE METER) | 2280 |
| (LUX) | 2282 |
| MINIMUM (SELECT ONE) | |
| (LUMENS) | 2284 |
| (CANDELAS PER SQUARE METER) | 2286 |
| (LUX) | 2288 |
| MAXIMUM (SELECT ONE) | |
| (LUMENS) | 2290 |
| (CANDELAS PER SQUARE METER) | 2292 |
| (LUX) | 2294 |
| MAXIMUM POWER CONSUMED (WATTS) | 2295 |
| LIGHT DISTRIBUTION | |
| SINGLE OR MAJOR FILAMENT (DESIGNATION) | 2296 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 2276 | THE FLUORESCENT BULB SHALL BE 2276. |
| 2278 | OUTPUT SHALL BE 2278 LUMENS. |
| 2280 | OUTPUT SHALL BE 2280 CANDELAS PER SQUARE METER. |
| 2282 | OUTPUT SHALL BE 2282 LUX. |
| 2284 | OUTPUT SHALL BE NOT LESS THAN 2284 LUMENS. |
| 2286 | OUTPUT SHALL BE NOT LESS THAN 2286 CANDELAS PER SQUARE METER. |
| 2288 | OUTPUT SHALL BE NOT LESS THAN 2288 LUX. |
| 2290 | OUTPUT SHALL BE NOT GREATER THAN 2290 LUMENS. |
| 2292 | OUTPUT SHALL BE NOT GREATER THAN 2292 CANDELAS PER SQUARE METER. |
| 2294 | OUTPUT SHALL BE NOT GREATER THAN 2294 LUX. |
| 2295 | POWER CONSUMED SHALL BE NOT GREATER THAN 2295 WATTS. |
| 2296 | THE SINGLE OR MAJOR FILAMENT SHALL BE 2296. |



Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| INITIAL LIGHT OUTPUT (CONT) | |
| SINGLE OR MAJOR FILAMENT (CONT) | |
| MINIMUM (SELECT ONE) | |
| (CANDLES) | 2298 |
| (LUMENS) | 2300 |
| (CANDELAS) | 2302 |
| (LUX) | 2304 |
| HORIZONTAL ANGLE FROM BEAM AXIS | |
| (DEGREES) | 2306 |
| VERTICAL ANGLE FROM BEAM AXIS | |
| (DEGREES) | 2308 |
| MINOR FILAMENT (DESIGNATION) | 2310 |
| MINIMUM (SELECT ONE) | |
| (CANDLES) | 2312 |
| (LUMENS) | 2314 |
| (CANDELAS) | 2316 |
| (LUX) | 2318 |
| HORIZONTAL ANGLE FROM BEAM AXIS | |
| (DEGREES) | 2320 |
| VERTICAL ANGLE FROM BEAM AXIS | |
| (DEGREES) | 2322 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 2298 | LIGHT DISTRIBUTION SHALL BE NOT LESS THAN 2298 CANDLES. |
| 2300 | LIGHT DISTRIBUTION SHALL BE NOT LESS THAN 2300 LUMENS. |
| 2302 | LIGHT DISTRIBUTION SHALL BE NOT LESS THAN 2302 CANDELAS. |
| 2304 | LIGHT DISTRIBUTION SHALL BE NOT LESS THAN 2304 LUX. |
| 2306 | THE HORIZONTAL ANGLE FROM THE BEAM AXIS SHALL BE 2306 DEGREES. |
| 2308 | THE VERTICAL ANGLE FROM THE BEAM AXIS SHALL BE 2308 DEGREES. |
| 2310 | THE MINOR FILAMENT SHALL BE 2310. |
| 2312 | LIGHT DISTRIBUTION SHALL BE NOT LESS THAN 2312 CANDLES. |
| 2314 | LIGHT DISTRIBUTION SHALL BE NOT LESS THAN 2314 LUMENS. |
| 2316 | LIGHT DISTRIBUTION SHALL BE NOT LESS THAN 2316 CANDELAS. |
| 2318 | LIGHT DISTRIBUTION SHALL BE NOT LESS THAN 2318 LUX. |
| 2320 | THE HORIZONTAL ANGLE FROM THE BEAM AXIS SHALL BE 2320 DEGREES. |
| 2322 | THE VERTICAL ANGLE FROM THE BEAM AXIS SHALL BE 2322 DEGREES. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDES (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| INITIAL LIGHT OUTPUT (CONT) | |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 2324 |
| AS FOLLOWS: | 2326 |
| NOMINAL BURN-IN PERIOD (HOURS) | 2328 |
| TEST CONDITION | |
| INITIAL LIGHT OUTPUT TEST VOLTAGE | |
| SINGLE OR MAJOR FILAMENT | |
| NOMINAL VOLTAGE (VOLTS) | 2332 |
| TOLERANCE (VOLTS) | 2334 |
| NOMINAL FREQUENCY (HERTZ) | 2336 |
| MINOR FILAMENT | |
| NOMINAL VOLTAGE (VOLTS) | 2340 |
| TOLERANCE (VOLTS) | 2342 |
| NOMINAL FREQUENCY (HERTZ) | 2344 |
| FLUORESCENT BULB | |
| NOMINAL VOLTAGE (VOLTS) | 2348 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 2324 | INITIAL LIGHT OUTPUT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2324. |
| 2326 | INITIAL LIGHT OUTPUT. TESTING SHALL BE PERFORMED AS FOLLOWS: |
| 2328 | THE BURN-IN PERIOD SHALL BE 2328 HOURS. |
| 2332 | TEST VOLTAGE SHALL BE 2332 VOLTS FOR THE SINGLE OR MAJOR FILAMENT. |
| 2334 | TEST VOLTAGE TOLERANCE SHALL BE 2334 VOLTS FOR THE SINGLE OR MAJOR FILAMENT. |
| 2336 | TEST VOLTAGE FREQUENCY SHALL BE 2336 HERTZ FOR THE SINGLE OR MAJOR FILAMENT. |
| 2340 | TEST VOLTAGE SHALL BE 2340 VOLTS FOR THE MINOR FILAMENT. |
| 2342 | TEST VOLTAGE TOLERANCE SHALL BE 2342 VOLTS FOR THE MINOR FILAMENT. |
| 2344 | TEST VOLTAGE FREQUENCY SHALL BE 2344 HERTZ FOR THE MINOR FILAMENT. |
| 2348 | TEST VOLTAGE SHALL BE 2348 VOLTS FOR THE FLUORESCENT BULB. |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| INITIAL LIGHT OUTPUT (CONT) | |
| NOMINAL VOLTAGE (VOLTS) (CONT) | |
| TOLERANCE (VOLTS) | 2350 |
| NOMINAL FREQUENCY (HERTZ) | 2352 |
| INITIAL LIGHT OUTPUT TEST CURRENT | |
| SINGLE OR MAJOR FILAMENT | |
| NOMINAL TEST CURRENT (AMPERES) | 2356 |
| TOLERANCE (AMPERES) | 2358 |
| NOMINAL FREQUENCY (HERTZ) | 2360 |
| MINOR FILAMENT | |
| NOMINAL TEST CURRENT (AMPERES) | 2364 |
| TOLERANCE (AMPERES) | 2366 |
| NOMINAL FREQUENCY (HERTZ) | 2368 |
| FLUORESCENT BULB | |
| NOMINAL TEST CURRENT (MILLIAMPERES) | 2372 |
| TOLERANCE (MILLIAMPERES) | 2374 |
| NOMINAL FREQUENCY (HERTZ) | 2376 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 2350 | TEST VOLTAGE TOLERANCE SHALL BE 2350 VOLTS FOR THE FLUORESCENT BULB. |
| 2352 | TEST VOLTAGE FREQUENCY SHALL BE 2352 HERTZ FOR THE FLUORESCENT BULB. |
| 2356 | TEST CURRENT SHALL BE 2356 AMPERES FOR THE SINGLE OR MAJOR FILAMENT. |
| 2358 | TEST CURRENT TOLERANCE SHALL BE 2358 AMPERES FOR THE SINGLE OR MAJOR FILAMENT. |
| 2360 | TEST CURRENT FREQUENCY SHALL BE 2360 HERTZ FOR THE SINGLE OR MAJOR FILAMENT. |
| 2364 | TEST CURRENT SHALL BE 2364 AMPERES FOR THE MINOR FILAMENT. |
| 2366 | TEST CURRENT TOLERANCE SHALL BE 2366 AMPERES FOR THE MINOR FILAMENT. |
| 2368 | TEST CURRENT FREQUENCY SHALL BE 2368 HERTZ FOR THE MINOR FILAMENT. |
| 2372 | TEST CURRENT SHALL BE 2372 MILLIAMPERES FOR THE FLUORESCENT BULB. |
| 2374 | TEST CURRENT TOLERANCE SHALL BE 2374 MILLIAMPERES FOR THE FLUORESCENT BULB. |
| 2376 | TEST CURRENT FREQUENCY SHALL BE 2376 HERTZ FOR THE FLUORESCENT BULB. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| INITIAL LIGHT OUTPUT (CONT) | |
| AS FOLLOWS: (CONT) | |
| BURNING POSITION | |
| PER SPECIFIED BURNING POSITION | 2378 |
| LIGHT OUTPUT MEASUREMENT (SELECT ONE) | |
| COMPARISON METHOD. | 2380 |
| INTEGRATING SPHERE METHOD. | 2382 |
| ANY SUITABLE METHOD. | 2384 |
| PER MIL-L-00116 | 2386 |
| BALLAST | |
| NOMINAL RATED VOLTAGE (VOLTS) | 2388 |
| NOMINAL RATED CURRENT CAPACITY (MILLIAMPERES) | 2400 |
| STARTER | |
| NOMINAL RATED VOLTAGE (VOLTS) | 2402 |
| NOMINAL RATED WATTAGE (WATTS) | 2404 |
| NOMINAL PREHEAT TIME (SECONDS) | 2406 |
| NOMINAL SPECIMEN SEASONING TIME (HOURS) | 2408 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 2378 | THE BURNING POSITION SHALL BE IN ACCORDANCE WITH THE SPECIFIED BURNING POSITION. |
| 2380 | THE LIGHT OUTPUT MEASUREMENT SHALL BE BY THE COMPARISON METHOD. |
| 2382 | THE LIGHT OUTPUT MEASUREMENT SHALL BE BY THE INTEGRATING SPHERE METHOD. |
| 2384 | THE LIGHT OUTPUT MEASUREMENT SHALL BE BY ANY SUITABLE METHOD. |
| 2386 | INITIAL LIGHT OUTPUT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-L-00116. |
| 2388 | THE BALLAST RATED VOLTAGE SHALL BE 2388 VOLTS. |
| 2400 | THE BALLAST RATED CURRENT CAPACITY SHALL BE 2400 MILLIAMPERES. |
| 2402 | THE STARTER RATED VOLTAGE SHALL BE 2402 VOLTS. |
| 2404 | THE STARTER RATED WATTAGE SHALL B3 2404 WATTS. |
| 2406 | THE STARTER PREHEAT TIME SHALL BE 2406 SECONDS. |
| 2408 | THE SPECIMEN SEASONING TIME SHALL BE 2408 HOURS. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| INITIAL LIGHT OUTPUT (CONT) | |
| PER MIL-L-00116 (CONT) | |
| MAXIMUM PERCENT RMS SUMMATION OF SUPPLY VOLTAGE HARMONIC COMPONENTS OVER FUNDAMENTAL COMPONENTS (PERCENT) | 2410 |
| NOMINAL TEST TEMPERATURE (DEGREES CELSIUS) | 2412 |
| NOMINAL FREQUENCY OF BALLAST SUPPLY VOLTAGE (HERTZ) | 2414 |
| RANDOM DROP | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 4967 |
| AS FOLLOWS: | 2500 |
| NO PHYSICAL DAMAGE. | 2502 |
| NO DEGRADATION OF PERFORMANCE. | 2504 |
| REQUIREMENTS SHALL CONFORM TO INITIAL LIGHT OUTPUT REQUIREMENTS. | 2506 |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 4963 |
| PER MIL-STD-202, METHOD 203. | 4972 |
| VISUALLY INSPECT FOR DAMAGE. | 2510 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 2410 | THE RMS SUMMATION OF SUPPLY VOLTAGE HARMONIC COMPONENTS SHALL BE NOT GREATER THAN 2410 PERCENT OVER THE FUNDAMENTAL COMPONENTS. |
| 2412 | THE TEST TEMPERATURE SHALL BE 2412 DEGREES CELSIUS. |
| 2414 | THE BALLAST SUPPLY VOLTAGE FREQUENCY SHALL BE 2414 HERTZ. |
| 4967 | RANDOM DROP. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4967. |
| 2500 | RANDOM DROP. THE REQUIREMENT(S) SHALL BE AS FOLLOWS: |
| 2502 | THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE. |
| 2504 | THERE SHALL BE NO DEGRADATION OF PERFORMANCE. |
| 2506 | REQUIREMENTS AFTER RANDOM DROP SHALL BE IN ACCORDANCE WITH THE INITIAL LIGHT OUTPUT REQUIREMENTS. |
| 4963 | RANDOM DROP. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4963. |
| 4972 | RANDOM DROP. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 203 OF MIL-STD-202. |
| 2510 | VISUALLY INSPECT FOR PHYSICAL DAMAGE. |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| RANDOM DROP (CONT) | |
| PER MIL-STD-202, METHOD 203. (CONT) | |
| PERFORM INITIAL LIGHT OUTPUT TEST AFTER RANDOM DROP TEST. | 2512 |
| REFLECTOR LAMP | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 2600 |
| AS FOLLOWS: | 2602 |
| NO DISCOLORING, CRACKING, BLISTERING, PEELING OR DETERIORATION OF REFLECTIVE COATING. | 2604 |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 2610 |
| PER MIL-L-6363. | 2612 |
| NOMINAL TEST TEMPERATURE (DEGREES CELSIUS) | 2614 |
| NOMINAL BURN-IN PERIOD (HOURS) | 2616 |
| TEST CONDITION | |
| TEST VOLTAGE | |
| SINGLE FILAMENT | |
| NOMINAL VOLTAGE (VOLTS) | 2620 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 2512 | PERFORM INITIAL LIGHT OUTPUT TEST AFTER RANDOM DROP TEST. |
| 2600 | REFLECTOR LAMP. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2600. |
| 2602 | REFLECTOR LAMP. THE REQUIREMENT(S) SHALL BE AS FOLLOWS: |
| 2604 | THERE SHALL BE NO DISCOLORING, CRACKING, BLISTERING, PEELING, OR DETERIORATION OF THE REFLECTIVE COATING. |
| 2610 | REFLECTOR LAMP. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2610. |
| 2612 | REFLECTOR LAMP. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-L-6363. |
| 2614 | THE TEST TEMPERATURE SHALL BE 2614 DEGREES CELSIUS. |
| 2616 | THE BURN-IN PERIOD SHALL BE 2616 HOURS. |
| 2620 | THE TEST VOLTAGE SHALL BE 2620 VOLTS FOR THE SINGLE FILAMENT. |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| REFLECTOR LAMP (CONT) | |
| NOMINAL VOLTAGE (VOLTS) (CONT) | |
| TOLERANCE (VOLTS) | 2622 |
| FREQUENCY (HERTZ) | 2624 |
| MAJOR FILAMENT | |
| NOMINAL VOLTAGE (VOLTS) | 2628 |
| TOLERANCE (VOLTS) | 2630 |
| NOMINAL FREQUENCY (HERTZ) | 2632 |
| MINOR FILAMENT | |
| NOMINAL VOLTAGE (VOLTS) | 2636 |
| TOLERANCE (VOLTS) | 2638 |
| NOMINAL FREQUENCY (HERTZ) | 2640 |
| RELIABILITY SCREENING | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 6929 |
| NO EVIDENCE OF PHYSICAL DAMAGE. | 6930 |



Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currenversion before use.

CHAR
CODE STANDARD PARAGRAPH

2622 THE TEST VOLTAGE TOLERANCE SHALL BE 2622 VOLTS FOR THE SINGLE FILAMENT.

2624 THE SINGLE FILAMENT TEST VOLTAGE FREQUENCY SHALL BE 2624 HERTZ.

2628 THE TEST VOLTAGE SHALL BE 2628 VOLTS FOR THE MAJOR FILAMENT.

2630 THE TEST VOLTAGE TOLERANCE SHALL BE 2630 VOLTS FOR THE MAJOR FILAMENT.

2632 THE TEST VOLTAGE FREQUENCY SHALL BE 2632 HERTZ FOR THE MAJOR FILAMENT.

2636 THE TEST VOLTAGE SHALL BE 2636 VOLTS FOR THE MINOR FILAMENT.

2638 THE TEST VOLTAGE TOLERANCE SHALL BE 2638 VOLTS FOR THE MINOR FILAMENT.

2640 THE TEST VOLTAGE FREQUENCY SHALL BE 2640 HERTZ FOR THE MINOR FILAMENT.

6929 RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6929.

6930 RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| RELIABILITY SCREENING (CONT) | |
| NO EVIDENCE OF PHYSICAL DAMAGE. (CONT) | |
| REMAIN WITHIN SPECIFIED TOLERANCE. | 6937 |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 6696 |
| PER MIL-STD-202, METHOD 108. | 6697 |
| *DURATION (SELECT ONE) | |
| TEST CONDITION (LETTER) | 6698 |
| (HOURS) | 6699 |
| *DUTY CYCLE (SELECT ONE) | |
| 1.5 HOURS ON AND 0.5 HOUR OFF. | 6710 |
| STEADY STATE. | 6713 |
| *TEST TEMPERATURE (DEGREES CELSIUS) | 6700 |
| *TOLERANCE (DEGREES CELSIUS) | 6701 |
| STILL AIR REQUIRED. | 6923 |
| POWER APPLIED TIMES RATED POWER (NUMBER) | 6921 |
| MAXIMUM VOLTAGE (VOLTS) | 6939 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 6937 | ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCES. |
| 6696 | RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6696. |
| 6697 | RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 108 OF MIL-STD-202. |
| 6698 | TEST CONDITION LETTER 6698 SHALL APPLY. |
| 6699 | DURATION OF THE TEST SHALL BE 6699 HOUR(S). |
| 6710 | DUTY CYCLE SHALL BE ONE AND ONE-HALF HOUR ON AND ONE-HALF HOUR OFF. |
| 6713 | DUTY CYCLE SHALL BE STEADY STATE. |
| 6700 | TEST TEMPERATURE SHALL BE 6700 DEGREES CELSIUS. |
| 6701 | TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 6701 DEGREES CELSIUS. |
| 6923 | TEST CHAMBER SHALL HAVE STILL AIR. |
| 6921 | ITEM(S) SHALL BE TESTED AT 6921 TIMES THE RATED POWER. |
| 6939 | APPLIED VOLTAGE SHALL BE NOT GREATER THAN 6939 VOLTS. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| RELIABILITY SCREENING (CONT) | |
| PER MIL-STD-202, METHOD 108. (CONT) | |
| TEST POTENTIAL (SELECT ONE) | |
| (VOLTS, AC) | 6706 |
| (VOLTS, DC) | 6707 |
| MEASUREMENT INTERVALS (HOURS) | 6922 |
| MOUNT PER DOCUMENT (DOC DES) | 6924 |
| SALT FOG | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 4998 |
| AS FOLLOWS: | 2800 |
| NO PHYSICAL DAMAGE OR CORROSION. | 2802 |
| NO DEGRADATION OF PERFORMANCE. | 2804 |
| POST TEST REQUIREMENTS | |
| ELECTRICAL REQUIREMENTS. | 2806 |
| INITIAL LIGHT OUTPUT REQUIREMENTS. | 2808 |
| REQUIREMENTS AFTER 24 HOURS EXPOSURE | |
| ELECTRICAL REQUIREMENTS. | 2810 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 6706 | TEST POTENTIAL SHALL BE 6706 VOLTS, AC. |
| 6707 | TEST POTENTIAL SHALL BE 6707 VOLTS, DC. |
| 6922 | MEASUREMENTS SHALL BE TAKEN AT 6922 HOUR INTERVALS DURING THE TEST. |
| 6924 | MOUNTING SHALL BE IN ACCORDANCE WITH 6924. |
| 4998 | SALT FOG. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4998. |
| 2800 | SALT FOG. THE REQUIREMENT(S) SHALL BE AS FOLLOWS: |
| 2802 | THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE OR CORROSION. |
| 2804 | THERE SHALL BE NO DEGRADATION OF PERFORMANCE. |
| 2806 | AFTER TEST, THE ELECTRICAL REQUIREMENTS SHALL APPLY. |
| 2808 | AFTER TEST, THE INITIAL LIGHT OUTPUT REQUIREMENTS SHALL APPLY. |
| 2810 | AFTER 24 HOURS OF EXPOSURE, THE ELECTRICAL REQUIREMENTS SHALL APPLY. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| SALT FOG (CONT) | |
| REQUIREMENTS AFTER 24 HOURS EXPOSURE (CONT) | |
| INITIAL LIGHT OUTPUT REQUIREMENTS | 2812 |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 4779 |
| PER MIL-STD-810, METHOD 509. | 4780 |
| SALT SOLUTION (PERCENT) | 4786 |
| EXPOSURE PERIOD (HOURS) | 4783 |
| DRYING PERIOD (HOURS) | 4775 |
| OPERATE (SELECT ONE) | |
| OPERATE ONLY AFTER DRYING. | 6245 |
| OPERATE ONLY AFTER EXPOSURE. | 6246 |
| OPERATE AFTER EXPOSURE AND AFTER DRYING. | 6247 |
| OPERATE AFTER 24 HOURS OF EXPOSURE. | 6248 |
| MEASUREMENTS PRIOR TO TEST | |
| ELECTRICAL. | 2820 |
| INITIAL LIGHT OUTPUT TEST. | 2822 |
| VISUAL INSPECTION AFTER TEST. | 2824 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 2812 | AFTER 24 HOURS OF EXPOSURE, THE INITIAL LIGHT OUTPUT REQUIREMENTS SHALL APPLY. |
| 4779 | SALT FOG. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4779. |
| 4780 | SALT FOG. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 509 OF MIL-STD-810. |
| 4786 | SOLUTION SHALL BE 4786 PERCENT SALT. |
| 4783 | DURATION OF THE TEST SHALL BE 4783 HOUR(S). |
| 4775 | DRYING PERIOD SHALL BE 4775 HOUR(S). |
| 6245 | ITEM(S) SHALL BE OPERATED ONLY AFTER DRYING. |
| 6246 | ITEM(S) SHALL BE OPERATED ONLY AFTER EXPOSURE. |
| 6247 | ITEM(S) SHALL BE OPERATED AFTER EXPOSURE AND AFTER DRYING. |
| 6248 | ITEM(S) SHALL BE OPERATED AFTER 24 HOURS OF EXPOSURE. |
| 2820 | THE ELECTRICAL TEST SHALL BE PERFORMED PRIOR TO THE SALT FOG TEST. |
| 2822 | THE INITIAL LIGHT OUTPUT TEST SHALL BE PERFORMED PRIOR TO THE SALT FOG TEST. |
| 2824 | THE SPECIMEN SHALL BE VISUALLY INSPECTED FOR DAMAGE AND CORROSION AFTER THE SALT FOG TEST. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| SALT FOG (CONT) | |
| PER MIL-STD-810, METHOD 509. (CONT) | |
| MEASUREMENTS AFTER TEST | |
| ELECTRICAL. | 2826 |
| INITIAL LIGHT OUTPUT TEST. | 2828 |
| VISUAL INSPECTION AFTER 24 HOUR PERIOD. | 2830 |
| MEASUREMENTS AFTER 24 HOUR PERIOD | |
| ELECTRICAL. | 2832 |
| INITIAL LIGHT OUTPUT TEST. | 2834 |
| SEAL | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 4745 |
| AS FOLLOWS: | 6370 |
| SPECIFIED TEST METHOD SENSITIVITY. | 4746 |
| NO BUBBLES INDICATIVE OF LEAKAGE. | 4748 |
| POST TEST REQUIREMENTS | |
| ELECTRICAL. | 2900 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 2826 | THE ELECTRICAL TEST SHALL BE PERFORMED AFTER THE SALT FOG TEST. |
| 2828 | THE INITIAL LIGHT OUTPUT TEST SHALL BE PERFORMED AFTER THE SALT FOG TEST. |
| 2830 | THE SPECIMEN SHALL BE VISUALLY INSPECTED FOR DAMAGE AND CORROSION AFTER THE 24 HOUR PERIOD. |
| 2832 | THE ELECTRICAL TEST SHALL BE PERFORMED AFTER THE 24 HOUR PERIOD. |
| 2834 | THE INITIAL LIGHT OUTPUT TEST SHALL BE PERFORMED AFTER THE 24 HOUR PERIOD. |
| 4745 | SEAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4745. |
| 6370 | SEAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS: |
| 4746 | THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE SPECIFIED TEST METHOD SENSITIVITY. |
| 4748 | THERE SHALL BE NO BUBBLES INDICATIVE OF LEAKAGE. |
| 2900 | THE SEAL POST TEST REQUIREMENTS SHALL BE IN ACCORDANCE WITH THE ELECTRICAL REQUIREMENTS. |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| SEAL (CONT) | |
| POST-TEST REQUIREMENTS (CONT) | |
| INITIAL LIGHT OUTPUT. | 2902 |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 4734 |
| PER MIL-STD-202, METHOD 112. | 4732 |
| *TEST CONDITION LETTER | |
| LETTER A. | 4737 |
| LIQUID FOR BATH (NAME) | 4738 |
| MINIMUM BATH TEMPERATURE (DEGREES CELSIUS) | 4739 |
| LETTER B. | 6320 |
| LIQUID FOR BATH (NAME) | 6321 |
| MINIMUM BATH TEMPERATURE (DEGREES CELSIUS) | 6322 |
| LETTER C. | 6323 |
| *LEAK RATE SENSITIVITY (ATM CC/SEC) | 4741 |
| *TEST PROCEDURE (SELECT ONE) | |
| TEST PROCEDURE I. | 4740 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 2902 | THE SEAL POST TEST REQUIREMENTS SHALL BE IN ACCORDANCE WITH THE INITIAL LIGHT OUTPUT REQUIREMENTS. |
| 4734 | SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4734. |
| 4732 | SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 112 OF MIL-STD-202. |
| 4737 | TEST CONDITION LETTER A SHALL APPLY. |
| 4738 | LIQUID FOR BUBBLE TEST BATH SHALL BE 4738. |
| 4739 | TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 4739 DEGREES CELSIUS. |
| 6320 | TEST CONDITION LETTER B SHALL APPLY. |
| 6321 | LIQUID FOR BUBBLE TEST BATH SHALL BE 6321. |
| 6322 | TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 6322 DEGREES CELSIUS. |
| 6323 | TEST CONDITION LETTER C SHALL APPLY. |
| 4741 | LEAK SENSITIVITY RATE SHALL BE 4741 ATM CC/SEC. |
| 4740 | PROCEDURE NUMBER I SHALL APPLY. |



Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| SEAL (CONT) | |
| TEST PROCEDURE I. (CONT) | |
| VACUUM PRESSURE (SELECT ONE) | |
| (POUNDS PER SQUARE INCH) | 4742 |
| (KILOPASCALS) | 4736 |
| TEST PROCEDURE II. | 6324 |
| BACKFILL PRESSURE (SELECT ONE) | |
| (POUNDS PER SQUARE INCH) | 6325 |
| (KILOPASCALS) | 6326 |
| NUMBER OF PRESSURE CYCLES (QUANTITY) | 4749 |
| TEST PROCEDURE III. | 6328 |
| GROSS LEAK TEST CONDITION (LETTER) | 4750 |
| TEST PROCEDURE IV. | 6329 |
| CHAMBER PRESSURE (SELECT ONE) | |
| (TORR) | 4751 |
| (KILOPASCALS) | 4735 |
| DURATION OF REDUCED PRESSURE (MINUTES) | 4752 |
| GROSS LEAK TEST CONDITION (LETTER) | 6330 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 4742 | VACUUM PRESSURE SHALL BE 4742 POUNDS PER SQUARE INCH. |
| 4736 | VACUUM PRESSURE SHALL BE 4736 KILOPASCALS. |
| 6324 | PROCEDURE NUMBER II SHALL APPLY. |
| 6325 | BACKFILL PRESSURE SHALL BE 6325 POUNDS PER SQUARE INCH. |
| 6326 | BACKFILL PRESSURE SHALL BE 6326 KILOPASCALS. |
| 4749 | THERE SHALL BE 4749 PRESSURE CYCLE(S). |
| 6328 | PROCEDURE NUMBER III SHALL APPLY. |
| 4750 | GROSS LEAK TEST CONDITION LETTER 4750 SHALL APPLY. |
| 6329 | PROCEDURE NUMBER IV SHALL APPLY. |
| 4751 | CHAMBER PRESSURE SHALL BE 4751 TORR. |
| 4735 | CHAMBER PRESSURE SHALL BE 4735 KILOPASCALS. |
| 4752 | DURATION AT LOW PRESSURE SHALL BE 4752 MINUTE(S). |
| 6330 | GROSS LEAK TEST CONDITION LETTER 6330 SHALL APPLY. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| SEAL (CONT) | |
| TEST CONDITION LETTER (CONT) | |
| LETTER D. | 6331 |
| ANY SUITABLE MOUNTING METHOD. | 4743 |
| LETTER E. | 6332 |
| ANY SUITABLE MOUNTING METHOD. | 6333 |
| MEASUREMENTS AFTER TEST | |
| ELECTRICAL TEST. | 2910 |
| INITIAL LIGHT OUTPUT TEST. | 2920 |
| SHOCK | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 7315 |
| AS FOLLOWS: | 3000 |
| NO PHYSICAL DAMAGE OR LOOSENING OF PARTS. | 3002 |
| NO DEGRADATION OF PERFORMANCE. | 3004 |
| POST TEST REQUIREMENTS | |
| ELECTRICAL REQUIREMENTS | 3006 |
| INITIAL LIGHT OUTPUT REQUIREMENTS | 3008 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 6331 | TEST CONDITION LETTER D SHALL APPLY. |
| 4743 | MOUNTING SHALL BE BY ANY SUITABLE METHOD. |
| 6332 | TEST CONDITION LETTER E SHALL APPLY. |
| 6333 | MOUNTING SHALL BE BY ANY SUITABLE METHOD. |
| 2910 | THE ELECTRICAL TEST SHALL BE PERFORMED AFTER THE SEAL TEST. |
| 2920 | THE INITIAL LIGHT OUTPUT TEST SHALL BE PERFORMED AFTER THE SEAL TEST. |
| 7315 | SHOCK. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 7315. |
| 3000 | SHOCK. THE REQUIREMENT(S) SHALL BE AS FOLLOWS: |
| 3002 | THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE OR LOOSENING OF PARTS. |
| 3004 | THERE SHALL BE NO DEGRADATION OF PERFORMANCE. |
| 3006 | POST TEST REQUIREMENTS SHALL BE IN ACCORDANCE WITH ELECTRICAL REQUIREMENTS. |
| 3008 | POST TEST REQUIREMENTS SHALL BE IN ACCORDANCE WITH INITIAL LIGHT OUTPUT REQUIREMENTS. |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| SHOCK (CONT) | |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 7311 |
| PER MIL-STD-810, METHOD 516. | 7312 |
| *PROCEDURE | |
| PROCEDURE I. | 7313 |
| *FIGURE (SELECT ONE) | |
| FIGURE 516-1 APPLIES. | 7317 |
| FIGURE 516-2 APPLIES. | 7318 |
| *AMPLITUDE, A OR B (LETTER) | 7305 |
| *DURATION, C OR D (LETTER) | 7306 |
| PROCEDURE II. | 6327 |
| PROCEDURE III. | 6338 |
| *FIGURE (SELECT ONE) | |
| FIGURE 516-1 APPLIES. | 6339 |
| FIGURE 516-2 APPLIES. | 6340 |
| *AMPLITUDE, A OR B (LETTER) | 6341 |
| *DURATION C OR D (LETTER) | 6342 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 7311 | SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 7311. |
| 7312 | SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE METHOD 516 OF MIL-STD-810. |
| 7313 | PROCEDURE NUMBER I SHALL APPLY. |
| 7317 | THE SHOCK PULSE SHAPE SHALL BE SAWTOOTH IN ACCORDANCE WITH FIGURE 516-1 OF METHOD 516 OF MIL-STD-810. |
| 7318 | THE SHOCK PULSE SHAPE SHALL BE HALF SINE WAVE IN ACCORDANCE WITH FIGURE 516-2 OF METHOD 516 OF MIL-STD-810. |
| 7305 | AMPLITUDE LETTER 7305 SHALL APPLY. |
| 7306 | DURATION LETTER 7306 SHALL APPLY. |
| 6327 | PROCEDURE NUMBER II SHALL APPLY. |
| 6338 | PROCEDURE NUMBER III SHALL APPLY. |
| 6339 | THE SHOCK PULSE SHAPE SHALL BE SAWTOOTH IN ACCORDANCE WITH THE FIGURE 516-1 OF METHOD 516 OF MIL-STD-810. |
| 6340 | THE SHOCK PULSE SHAPE SHALL BE HALF SINE WAVE IN ACCORDANCE WITH FIGURE 516-2 OF METHOD 516 OF MIL-STD-810. |
| 6341 | AMPLITUDE LETTER 6341 SHALL APPLY. |
| 6342 | DURATION LETTER 6342 SHALL APPLY. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| SHOCK (CONT) | |
| PROCEDURE (CONT) | |
| PROCEDURE IV. | 6343 |
| *FIGURE (SELECT ONE) | |
| FIGURE 516-1 APPLIES. | 6344 |
| FIGURE 516-2 APPLIES. | 6345 |
| *AMPLITUDE, A OR B (LETTER) | 6346 |
| *DURATION, C OR D (LETTER) | 6347 |
| PROCEDURE V. | 6348 |
| PROCEDURE VI. | 6349 |
| TEST TEMPERATURE (DEGREES CELSIUS) | 7307 |
| TEMPERATURE TOLERANCE (DEGREES CELSIUS) | 7308 |
| OPERATION DURING TEST REQUIRED. | 7309 |
| PERCENT RATED LOAD APPLIED (PERCENT) | 6204 |
| MONITOR PER METHOD 310 OF MIL-STD-202. | |
| *TEST CIRCUIT (LETTER) | 1503 |
| *TEST CONDITION (LETTER) | 1499 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 6343 | PROCEDURE NUMBER IV SHALL APPLY. |
| 6344 | THE SHOCK PULSE SHAPE SHALL BE SAWTOOTH IN ACCORDANCE WITH FIGURE 516-1 OF METHOD 516 OF MIL-STD-810. |
| 6345 | THE SHOCK PULSE SHAPE SHALL BE HALF SINE WAVE IN ACCORDANCE WITH FIGURE 516-2 OF METHOD 516 OF MIL-STD-810. |
| 6346 | AMPLITUDE LETTER 6346 SHALL APPLY. |
| 6347 | DURATION LETTER 6347 SHALL APPLY. |
| 6348 | PROCEDURE NUMBER V SHALL APPLY. |
| 6349 | PROCEDURE NUMBER VI SHALL APPLY. |
| 7307 | THE TEST TEMPERATURE SHALL BE 7307 DEGREES CELSIUS. |
| 7308 | THE TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 7308 DEGREES CELSIUS. |
| 7309 | OPERATION DURING THE TEST IS REQUIRED. |
| 6204 | THE ELECTRICAL LOAD SHALL BE 6204 PERCENT OF THE RATED LOAD. |
| 1503 | MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT 1503 SHALL APPLY. |
| 1499 | TEST CONDITION LETTER 1499 OF METHOD 310 OF MIL-STD-202 SHALL APPLY. |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| SHOCK (CONT) | |
| MONITOR PER METHOD 310 OF MIL-STD-202. (CONT) | |
| MEASUREMENTS PRIOR TO TEST | |
| ELECTRICAL TEST. | 3020 |
| INITIAL LIGHT OUTPUT TEST. | 3022 |
| MEASUREMENTS AFTER TEST | |
| ELECTRICAL TEST. | 3024 |
| INITIAL LIGHT OUTPUT TEST. | 3026 |
| TEMPERATURE RESISTANCE | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 3100 |
| AS FOLLOWS: | 3102 |
| NO DISCOLORATION, CRACKING, FADING, OR PEELING OF BULB COATINGS | 3104 |
| SPECIMEN SHALL CONFORM TO COATING ADHESION REQUIREMENTS AFTER TEST | 3106 |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 3120 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 3020 | THE ELECTRICAL TEST SHALL BE PERFORMED PRIOR TO THE SHOCK TEST. |
| 3022 | THE INITIAL LIGHT OUTPUT TEST SHALL BE PERFORMED PRIOR TO THE SHOCK TEST. |
| 3024 | THE ELECTRICAL TEST SHALL BE PERFORMED AFTER THE SHOCK TEST. |
| 3026 | THE INITIAL LIGHT OUTPUT TEST SHALL BE PERFORMED AFTER THE SHOCK TEST. |
| 3100 | TEMPERATURE RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3100. |
| 3102 | TEMPERATURE RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS: |
| 3104 | THERE SHALL BE NO DISCOLORATION, CRACKING, FADING, OR PEELING OF THE BULB COATING. |
| 3106 | THE SPECIMEN, AFTER TEST, SHALL CONFORM TO THE COATING ADHESION REQUIREMENTS. |
| 3120 | TEMPERATURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3120. |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| TEMPERATURE RESISTANCE (CONT) | |
| TEST METHODS (CONT) | |
| PER MIL-L-6363. | 3122 |
| NOMINAL LOW TEMPERATURE (DEGREES CELSIUS) | 3124 |
| NOMINAL TEST DURATION (HOURS) | 3126 |
| NOMINAL HIGH TEMPERATURE (DEGREES CELSIUS) | 3128 |
| NOMINAL TEST DURATION (HOURS) | 3130 |
| PERFORM COATING ADHESION TEST AFTER TEMPERATURE RESISTANCE TEST | 3132 |
| THERMAL SHOCK (TEMPERATURE CYCLING) | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 4722 |
| AS FOLLOWS: | 3200 |
| NO PHYSICAL DAMAGE. | 3202 |
| NO DEGRADATION OF PERFORMANCE. | 3204 |
| POST TEST REQUIREMENTS | |
| ELECTRICAL REQUIREMENTS | 3206 |
| INITIAL LIGHT OUTPUT REQUIREMENTS | 3208 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 3122 | TEMPERATURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-L-6363. |
| 3124 | THE LOW TEST TEMPERATURE SHALL BE 3124 DEGREES CELSIUS. |
| 3126 | THE LOW TEST TEMPERATURE DURATION SHALL BE 3126 HOURS. |
| 3128 | THE HIGH TEST TEMPERATURE SHALL BE 3128 DEGREES CELSIUS. |
| 3130 | THE HIGH TEST TEMPERATURE DURATION SHALL BE 3130 HOURS. |
| 3132 | PERFORM COATING ADHESION TEST AFTER THE TEMPERATURE RESISTANCE TEST. |
| 4722 | THERMAL SHOCK (TEMPERATURE CYCLING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4722. |
| 3200 | THERMAL SHOCK (TEMPERATURE CYCLING). THE REQUIREMENT(S) SHALL BE AS FOLLOWS: |
| 3202 | THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE. |
| 3204 | THERE SHALL BE NO DEGRADATION OF PERFORMANCE. |
| 3206 | POST TEST REQUIREMENTS SHALL BE IN ACCORDANCE WITH THE ELECTRICAL REQUIREMENTS. |
| 3208 | POST TEST REQUIREMENTS SHALL BE IN ACCORDANCE WITH THE INITIAL LIGHT OUTPUT REQUIREMENTS. |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| THERMAL SHOCK (TEMPERATURE CYCLING) (CONT) | |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 4713 |
| PER MIL-STD-202, METHOD 107. | 4714 |
| *TEST CONDITION (LETTER) | 4715 |
| SPECIAL MOUNTING PER DOCUMENT (DOC DES) | 4719 |
| MEASUREMENTS PRIOR TO TEST | |
| ELECTRICAL | 3220 |
| INITIAL LIGHT OUTPUT | 3222 |
| LAMP IN FIXTURE AND OPERATING | 3224 |
| MEASUREMENTS AFTER TEST | |
| ELECTRICAL | 3226 |
| INITIAL LIGHT OUTPUT | 3228 |
| VISUALLY INSPECT FOR DAMAGE | 3230 |
| VIBRATION | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 4681 |
| AS FOLLOWS: | 3300 |
| NO PHYSICAL DAMAGE OR LOOSENING OF PARTS. | 3302 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 4713 | THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4713. |
| 4714 | THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 107 OF MIL-STD-202. |
| 4715 | TEST CONDITION LETTER 4715 SHALL APPLY. |
| 4719 | MOUNTING SHALL BE IN ACCORDANCE WITH 4719. |
| 3220 | PERFORM ELECTRICAL TEST PRIOR TO THERMAL SHOCK TEST. |
| 3222 | PERFORM INITIAL LIGHT OUTPUT TEST PRIOR TO THERMAL SHOCK TEST |
| 3224 | THE LAMP SHALL BE IN THE FIXTURE AND OPERATING. |
| 3226 | PERFORM ELECTRICAL TEST AFTER THE THERMAL SHOCK TEST. |
| 3228 | PERFORM INITIAL LIGHT OUTPUT TEST AFTER THERMAL SHOCK TEST. |
| 3230 | THE TEST SPECIMEN SHALL BE VISUALLY INSPECTED FOR DAMAGE AFTER THE THERMAL SHOCK TEST. |
| 4681 | VIBRATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4681. |
| 3300 | VIBRATION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS: |
| 3302 | THERE SHALL BE EVIDENCE OF PHYSICAL DAMAGE OR LOOSENING OF PARTS. |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| VIBRATION (CONT) | |
| AS FOLLOWS: (CONT) | |
| NO DEGRADATION OF PERFORMANCE. | 3304 |
| POST TEST REQUIREMENTS | |
| ELECTRICAL. | 3306 |
| INITIAL LIGHT OUTPUT. | 3308 |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 1505 |
| PER MIL-STD-810, METHOD 514. | 1514 |
| *PROCEDURE NUMBER (ROMAN NUMERAL) | 1518 |
| EQUIPMENT (CATEGORY) | 1540 |
| CURVE (LETTERS) | 1525 |
| APPLICABLE TABLE (NUMBER) | 1532 |
| APPLICABLE FIGURE (NUMBER) | 1559 |
| NOMINAL CURVE ACCELERATION DERATING (G'S) | 3320 |
| OPERATION NOT REQUIRED. | 1424 |
| TEMPERATURE (DEGREES CELSIUS) | 1542 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 3304 | THERE SHALL BE NO DEGRADATION OF PERFORMANCE. |
| 3306 | POST TEST REQUIREMENTS SHALL BE IN ACCORDANCE WITH THE ELECTRICAL REQUIREMENTS. |
| 3308 | POST TEST REQUIREMENTS SHALL BE IN ACCORDANCE WITH INITIAL LIGHT OUTPUT REQUIREMENTS. |
| 1505 | VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1505. |
| 1514 | VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 514 OF MIL-STD-810. |
| 1518 | PROCEDURE NUMBER 1518 SHALL APPLY. |
| 1540 | THE EQUIPMENT CATEGORY SHALL BE 1540 IN ACCORDANCE WITH METHOD 514 OF MIL-STD-810. |
| 1525 | CURVE 1525 SHALL APPLY. |
| 1532 | PROCEDURE AND TIME SCHEDULE SHALL BE AS SHOWN ON TABLE 1532 OF METHOD 514 OF MIL-STD-810. |
| 1559 | TEST CURVES SHALL BE AS SHOWN IN FIGURE 1559 OF METHOD 514 OF MIL-STD-810. |
| 3320 | THE ACCELERATION DERATING OF THE SELECTED TEST CURVE SHALL BE 3320 G'S. |
| 1424 | OPERATION DURING THE TEST IS NOT REQUIRED. |
| 1542 | VIBRATION TEST SHALL BE PERFORMED AT A TEMPERATURE OF 1542 DEGREES CELSIUS. |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| VIBRATION (CONT) | |
| TEMPERATURE (DEGREES CELSIUS) (CONT) | |
| TEMPERATURE TOLERANCE (DEGREES CELSIUS) | 1543 |
| DURATION AT TEMPERATURE (HOURS) | 1544 |
| SPECIMEN IN FIXTURE AND OPERATING | 3324 |
| MEASUREMENTS PRIOR TO TEST | |
| ELECTRICAL TEST | 3326 |
| INITIAL LIGHT OUTPUT TEST | 3328 |
| NOMINAL LIMITATION OF TRANSVERSE MOTION (PERCENT) | 3330 |
| MEASUREMENTS AFTER TEST | |
| ELECTRICAL TEST | 3344 |
| INITIAL LIGHT OUTPUT TEST | 3346 |
| STORAGE CONDITIONS | |
| (YEARS) | 1529 |
| CERTIFY MAXIMUM CURE DATE TO DELIVERY (QUARTERS) | 4942 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 1543 | TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1543 DEGREES CELSIUS. |
| 1544 | THE TEMPERATURE TIME DURATION SHALL BE 1544 HOUR(S). |
| 3324 | THE TEST SPECIMEN SHALL BE INSTALLED IN A LIGHT FIXTURE AND SHALL BE OPERATING. |
| 3326 | THE ELECTRICAL TEST SHALL BE PERFORMED PRIOR TO THE VIBRATION TEST. |
| 3328 | THE INITIAL LIGHT OUTPUT TEST SHALL BE PERFORMED PRIOR TO THE VIBRATION TEST. |
| 3330 | THE LIMITATION OF TRANSVERSE MOTION SHALL BE 3330 PERCENT OF THE INPUT ACTION. |
| 3344 | PERFORM ELECTRICAL TESTS AFTER THE VIBRATION TEST. |
| 3346 | PERFORM INITIAL LIGHT OUTPUT TESTS AFTER THE VIBRATION TEST. |
| | STORAGE CONDITIONS. |
| 1529 | ITEMS SHALL WITHSTAND 1529 YEARS OF STORAGE WHEN PROPERLY PRESERVED, PACKAGED AND MECHANICALLY PROTECTED WITHOUT REQUIRING MAJOR REPAIR. |
| 4942 | MANUFACTURER SHALL CERTIFY THAT THE CURE DATE SHALL BE NOT GREATER THAN 4942 QUARTERS PRIOR TO DELIVERY DATE. |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| STORAGE CONDITIONS (CONT) | |
| CERTIFY MININUM SHELF LIFE AFTER DELIVERY (QUARTERS) | 4943 |
| CERTIFY MAXIMUM MANUFACTURE DATE TO DELIVERY (QUARTERS) | 4944 |
| AGE LIMITATION PER MIL-STD-1523. | 5209 |
| PERFORMANCE CHARACTERISTICS (SEE TABLE XII, DOD-STD-35) | |
| NOTE: AUTOMATIC WHEN TABLE XII IS USED. | |
| MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35) | |
| NOTE: AUTOMATIC WHEN TABLE X IS USED. | |
| WORKMANSHIP | |
| (DOC DES) | 6870 |
| ADDITIONAL REQUIREMENTS | |
| A____ | 7001 |
| B____ | 7002 |
| C____ | 7003 |
| D____ | 7004 |
| E____ | 7005 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE STANDARD PARAGRAPH

4943 MANUFACTURER SHALL CERTIFY THAT THERE SHALL BE NOT LESS THAN 4943 QUARTERS OF SHELF LIFE AFTER DELIVERY.

4944 MANUFACTURER SHALL CERTIFY THAT THE DATE OF MANUFACTURE SHALL BE NOT GREATER THAN 4944 QUARTERS PRIOR TO DATE OF DELIVERY.

5209 AGE LIMITATIONS OF THE FINISHED PRODUCT SHALL BE IN ACCORDANCE WITH MIL-STD-1523.

PERFORMANCE CHARACTERISTICS. PERFORMANCE CHARACTERISTICS SHALL BE AS SHOWN IN THE PERFORMANCE CHARACTERISTICS TABLE.

MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.

6870 WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.

ADDITIONAL REQUIREMENTS.

7001 (A) 7001.

7002 (B) 7002.

7003 (C) 7003.

7004 (D) 7004.

7005 (E) 7005.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| PART MARKING (SELECT ONE) | |
| (DOC DES) | 6372 |
| MIL-STD-1285. | 7630 |
| MIL-STD-130. | 7629 |
| ADDITIONAL PART MARKING | |
| A____ | 6991 |
| B____ | 6992 |
| C____ | 6993 |
| D____ | 6994 |
| E____ | 6995 |
| APPLICABLE DOCUMENTS (SEE DOD-STD-35) | |
| QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35) | |
| PACKAGING (SEE DOD-STD-35) | |
| NOTES (SEE DOD-STD-35) | |
| NOMENCLATURE (SEE DOD-STD-35) | |
| SUPERSEDED DOCUMENT (SEE DOD-STD035) | |
| PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35) | |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 6372 | PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER. |
| 7630 | PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285. |
| 7629 | PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130. |
| | ADDITIONAL PART MARKING. |
| 6991 | (A) 6991. |
| 6992 | (B) 6992. |
| 6993 | (C) 6993. |
| 6994 | (D) 6994. |
| 6995 | (E) 6995. |

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI

(Project EDS-A272)




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

# APPENDIX A


# ILLUSTRATIONS




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

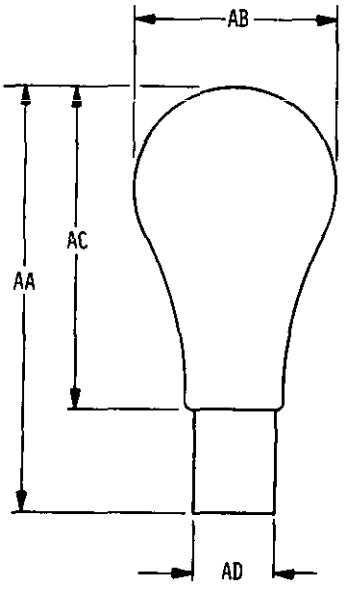



304-01-1

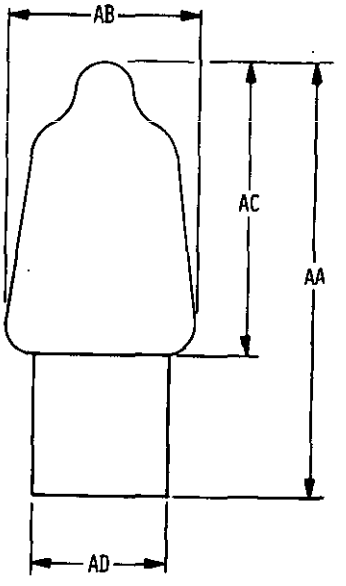


304-02-1





304-03-2

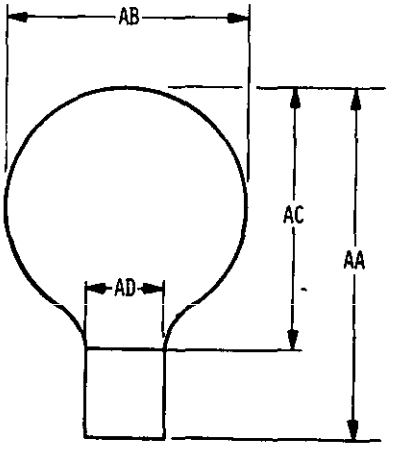



304-03-1




Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

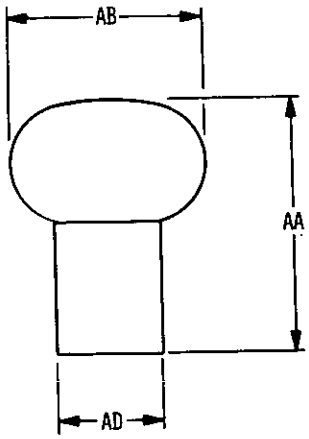


304-04-1

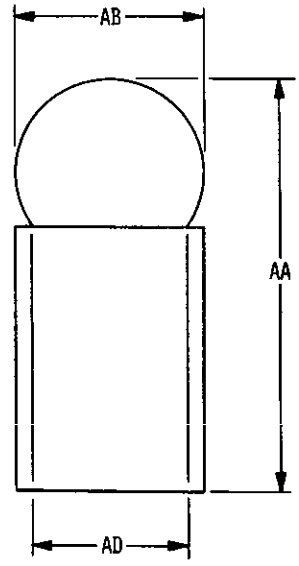



304-05-1

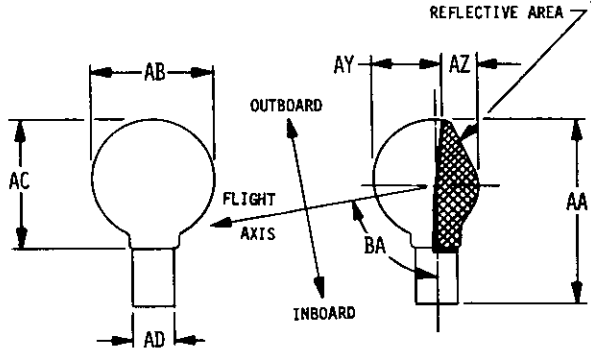



304-06-1




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.




304-07-1

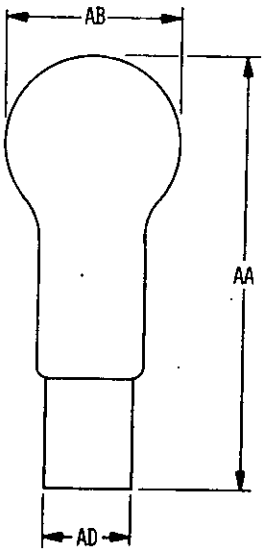



304-08-1

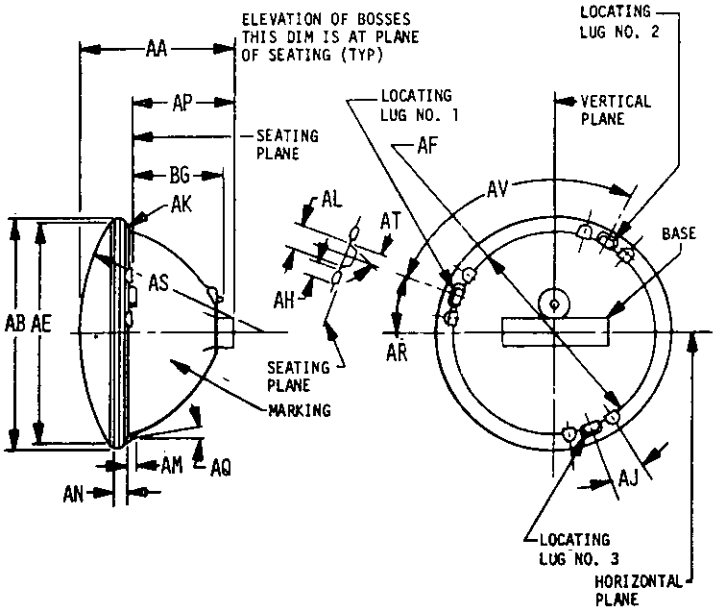



304-09-1



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

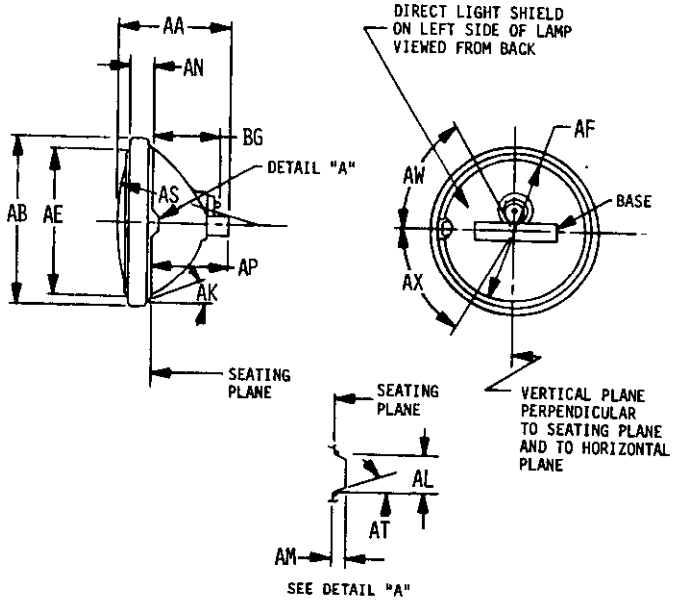



304-09-2

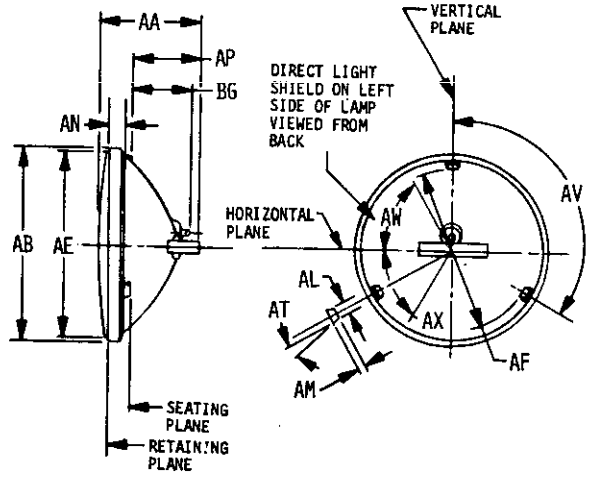



304-09-3




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

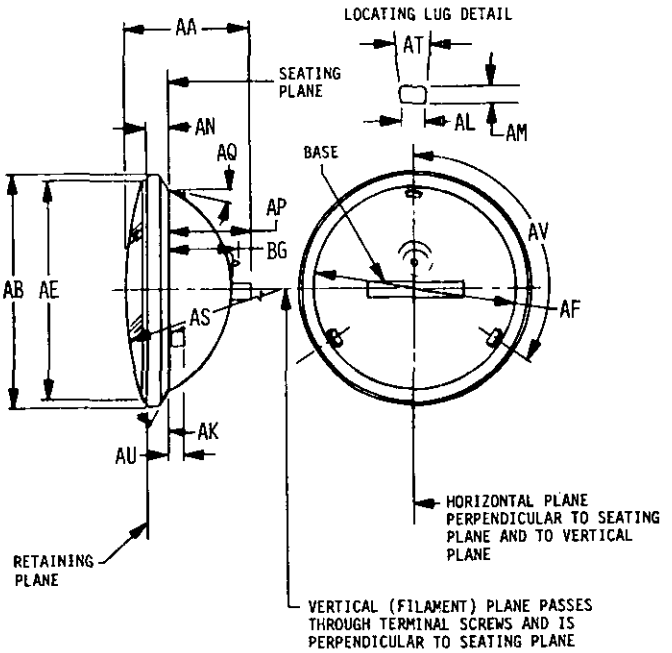


304-09-4

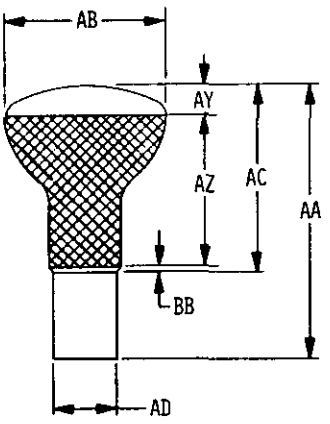



304-10-1

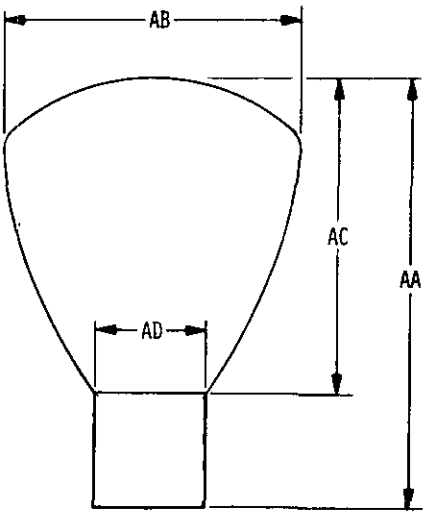



304-11-1




Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

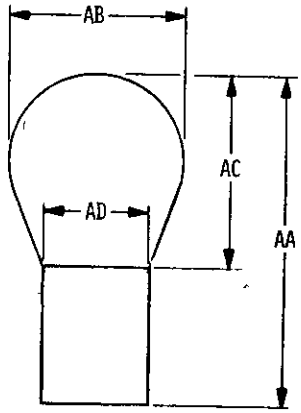



304-12-1

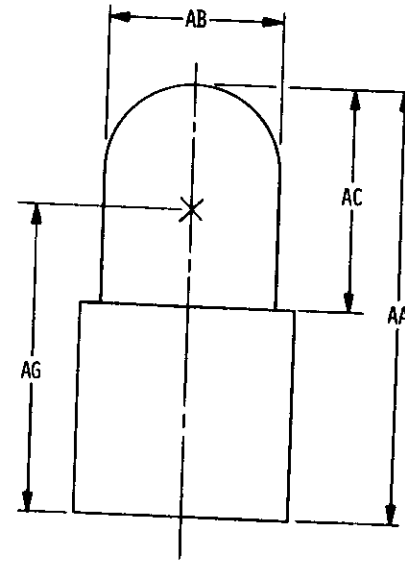


304-13-1

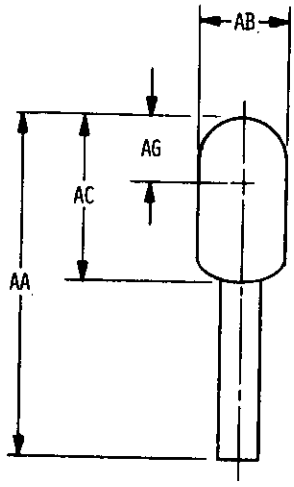



304-13-2

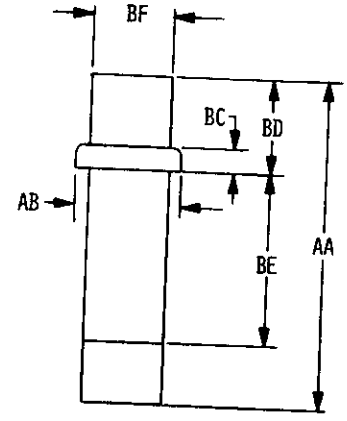



304-13-3




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

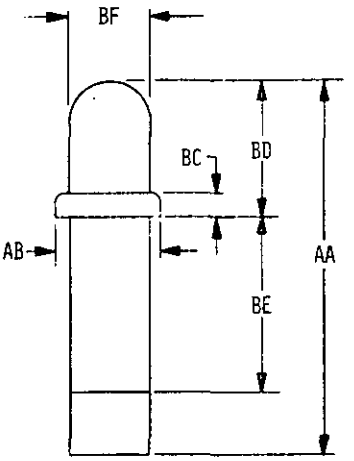


304-13-4

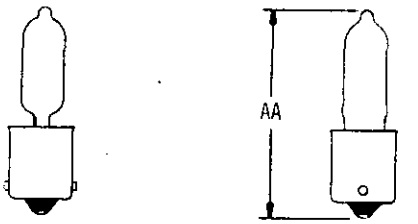



304-13-5

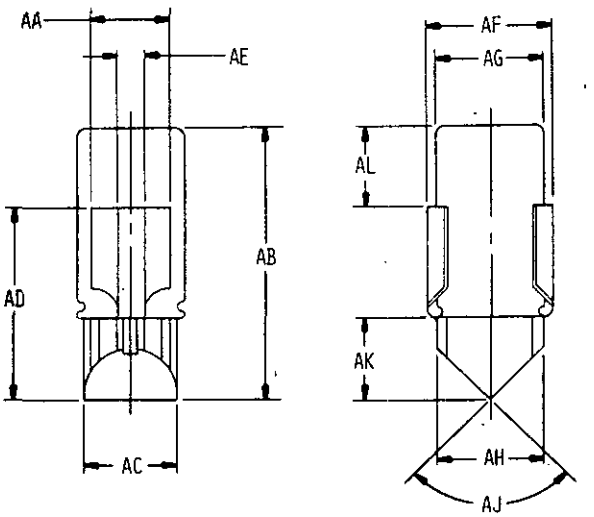


304-13-6




Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

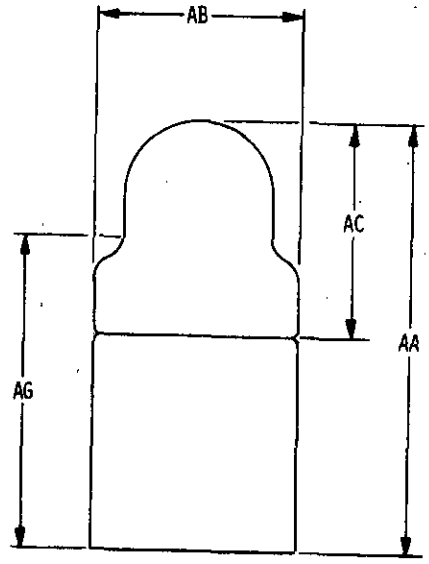


304-14-1




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

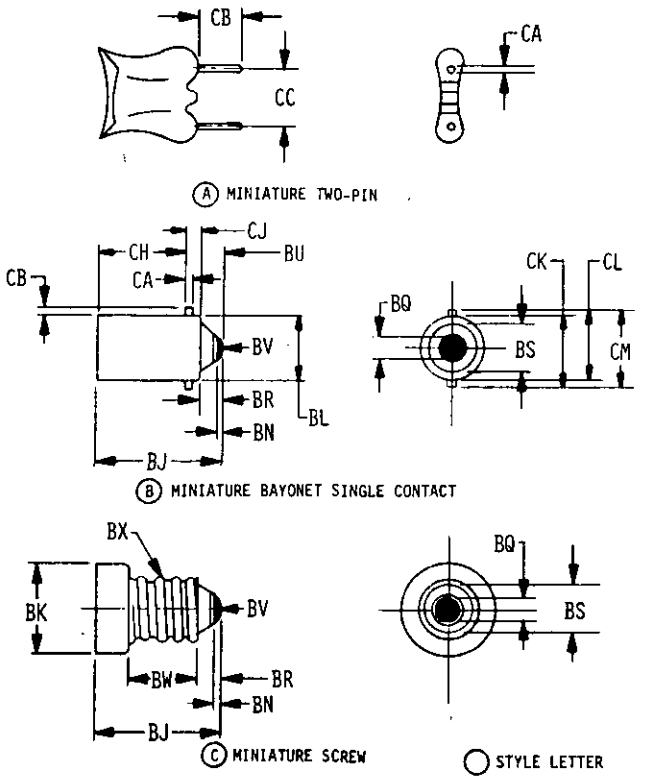



304-15-1




Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

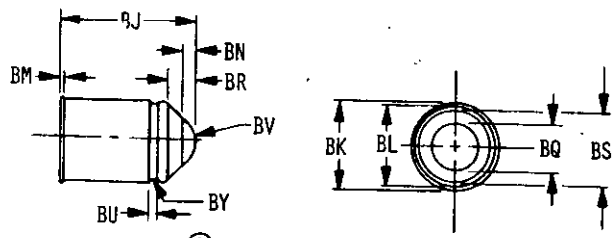


(A) MIDGET GROOVED

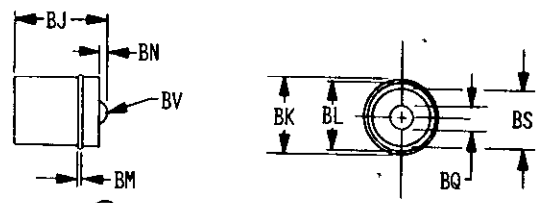


(B) MIDGET INVERTED FLANGE

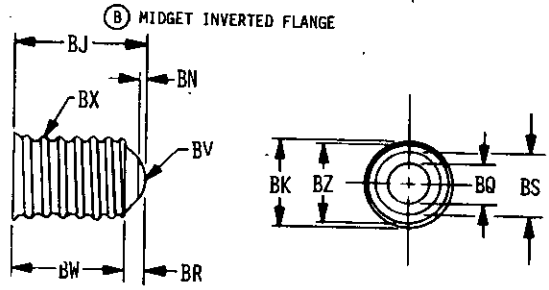



(C) MIDGET SCREW

○ STYLE LETTER


304-15-2



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

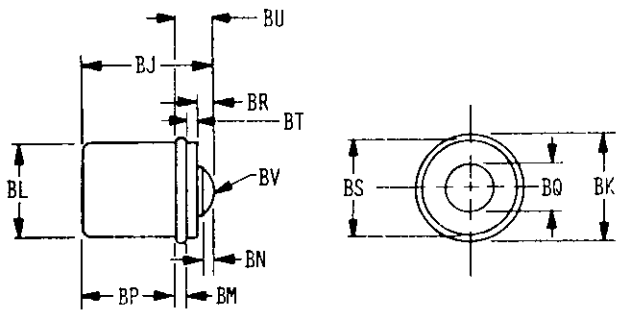


(A) MIDGET FLANGED SINGLE CONTACT

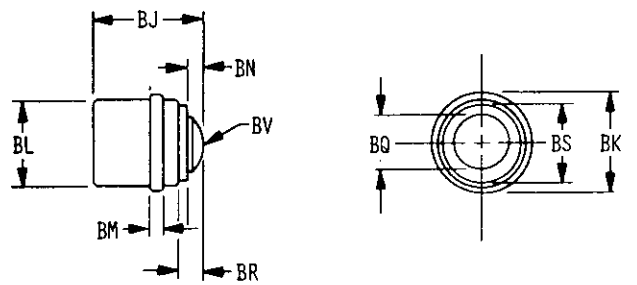



(B) SUBMIDGET FLANGED

○ STYLE LETTER


304-15-3



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

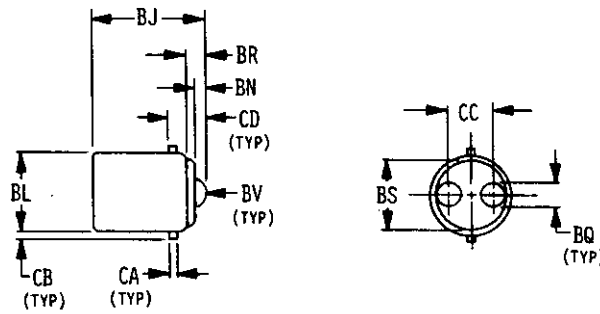


(A) BAYONET DOUBLE CONTACT

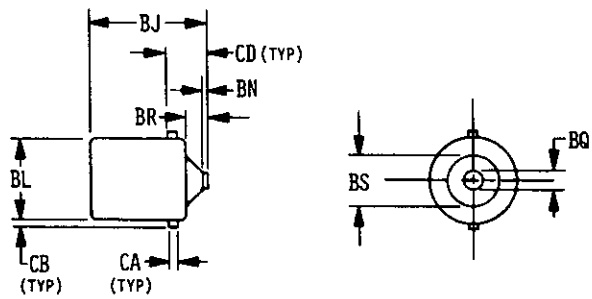



(B) BAYONET SINGLE CONTACT

○ STYLE LETTER

304-15-4




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

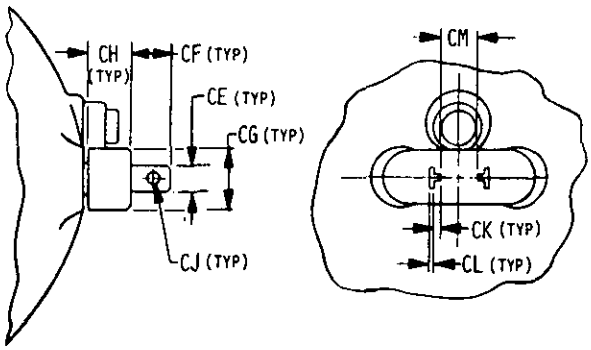



(A) MOGUL END PRONG

◯ STYLE LETTER

304-15-5

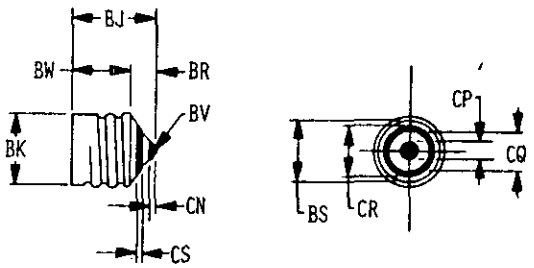


(A) MOGUL THREE CONTACT

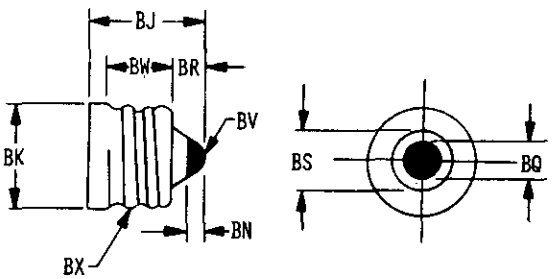



(B) MOGUL SCREW

◯ STYLE LETTER


304-15-6



Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

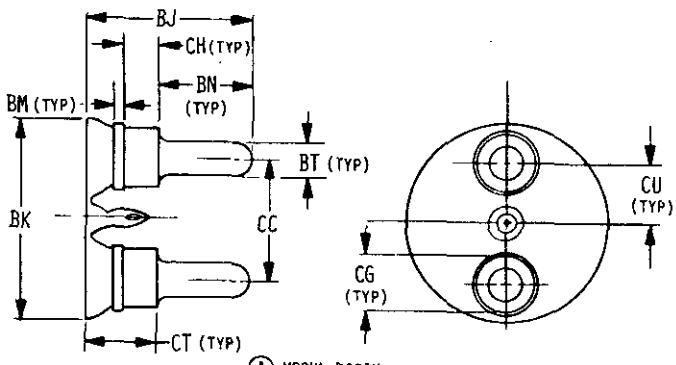


(A) MOGUL BIPIN

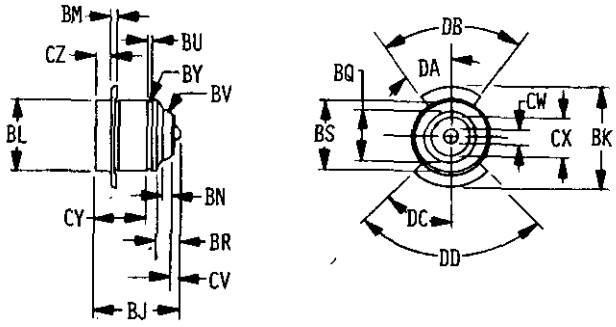



(B) MOGUL PREFOCUSING

○ STYLE LETTER

304-15-7




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

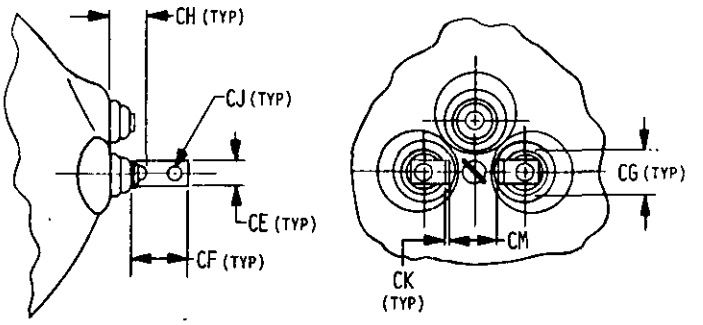


(A) TWO CONTACT LUGS

○ STYLE LETTER

304-15-8

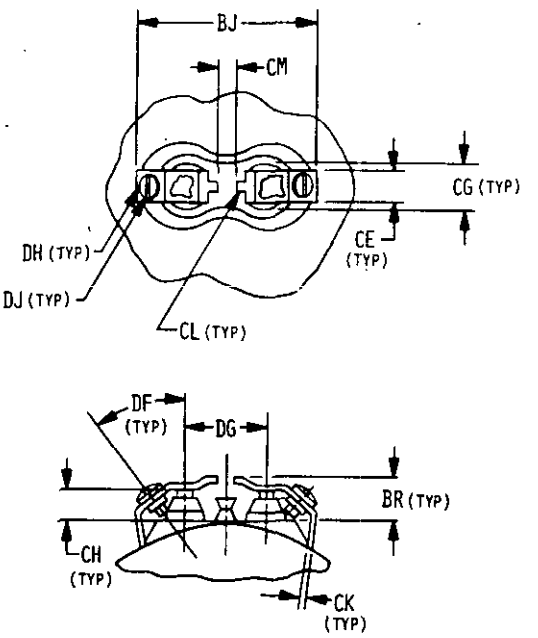



(A) TWO SCREW TERMINALS

○ STYLE LETTER

304-15-9




Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

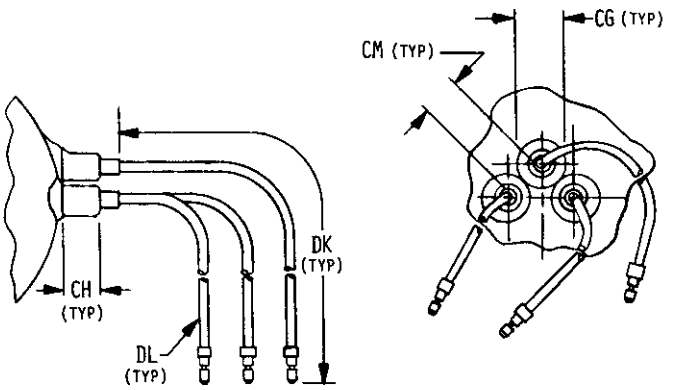



Ⓐ THREE CABLE

◯ STYLE LETTER

304-15-10

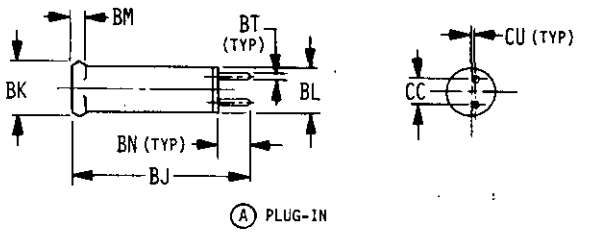


Ⓐ PLUG-IN

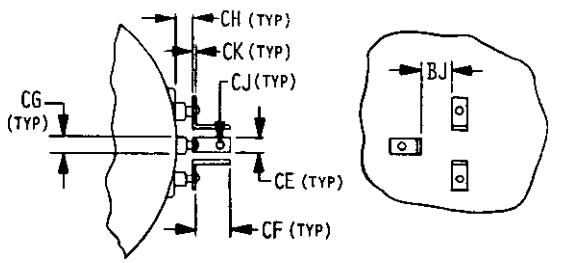



Ⓑ THREE LUG TERMINAL

◯ STYLE LETTER


304-15-11



Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

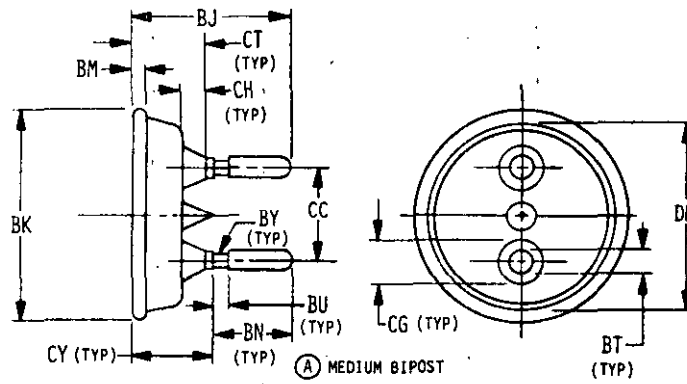


(A) MEDIUM BIPOST

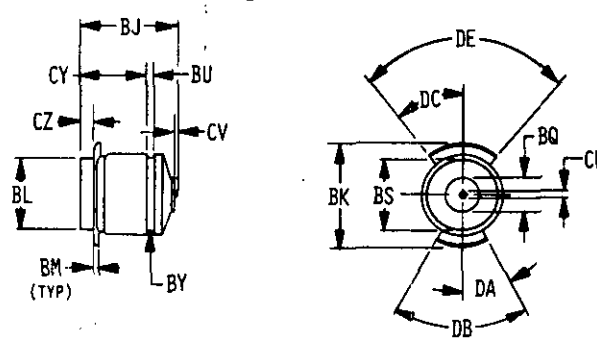



(B) MEDIUM PREFOCUSING

◯ STYLE LETTER

304-15-12



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

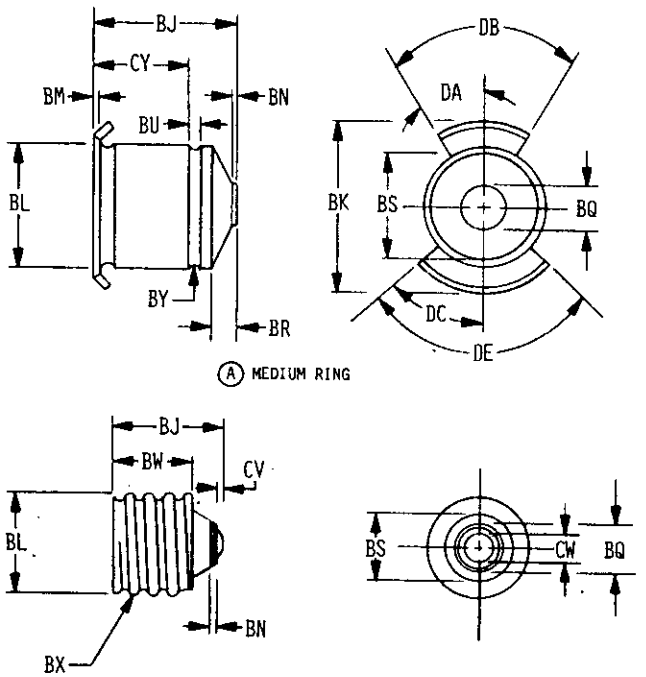


(A) MEDIUM RING


(B) MEDIUM SCREW

○ STYLE LETTER

304-15-13



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

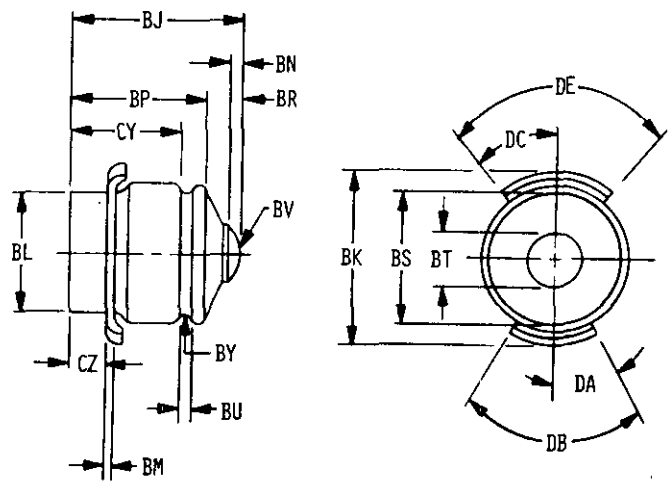



(A) MEDIUM PREFOCUSING SINGLE CONTACT

◯ STYLE LETTER


304-15-14



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

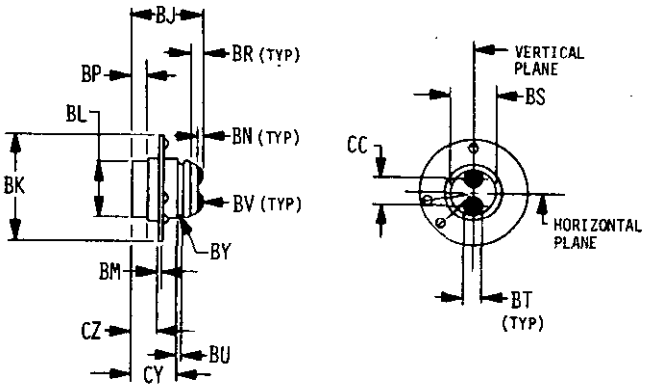


(A) CANDELABRA PREFOCUSING DOUBLE CONTACT

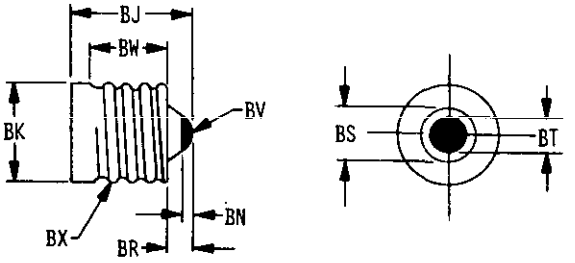



(B) CANDELABRA SCREW

STYLE LETTER

304-15-15




Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

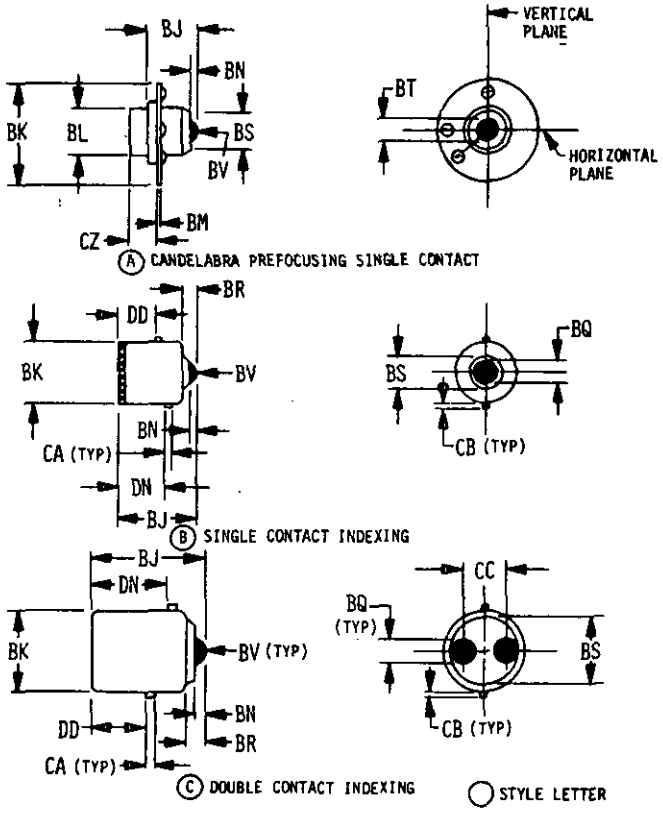


304-15-16




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

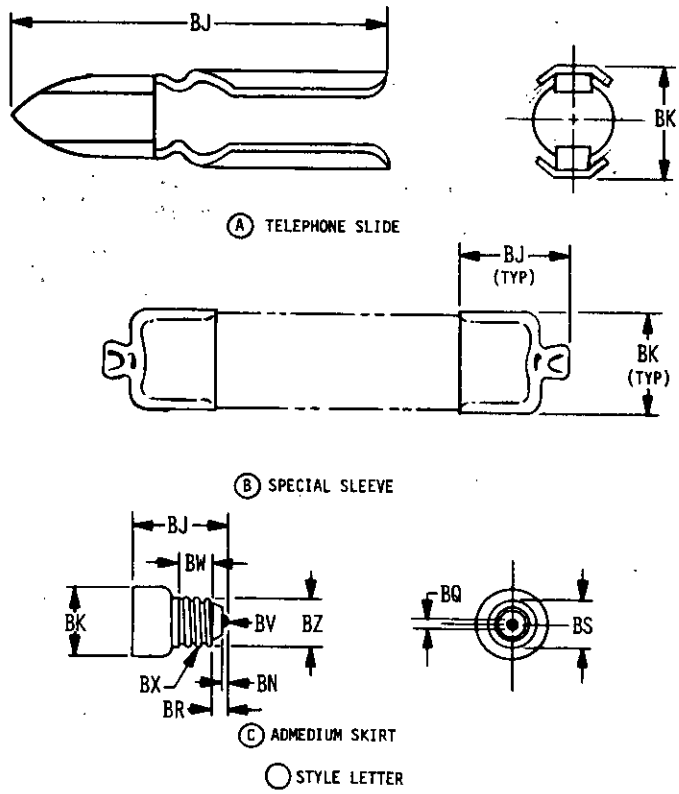



304-15-17



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

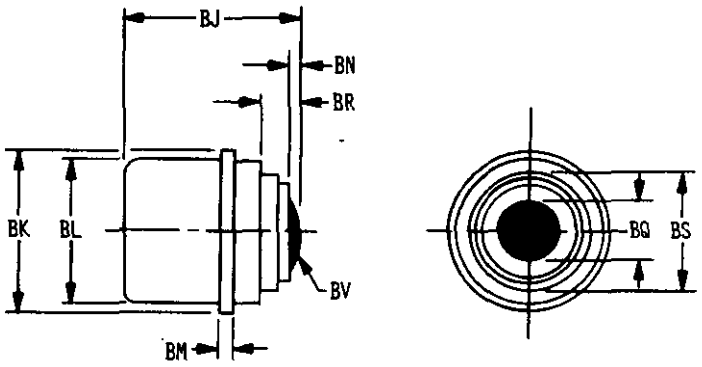


(A) RETARDED FLANGE

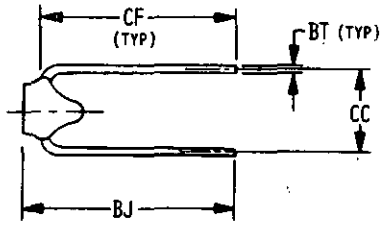



(B) WIRE TERMINAL

◯ STYLE LETTER


304-15-18



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

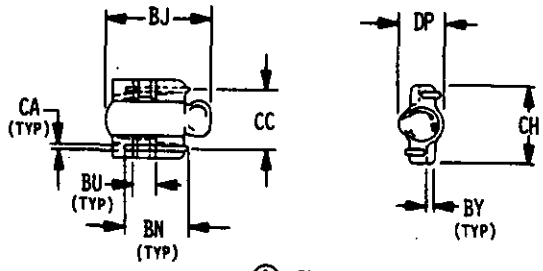


(A) WEDGE

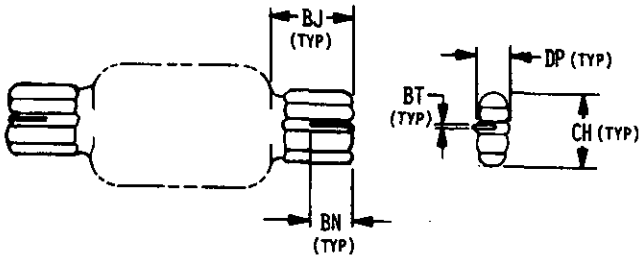



(B) DOUBLE WEDGE

○ STYLE LETTER

384-15-19




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

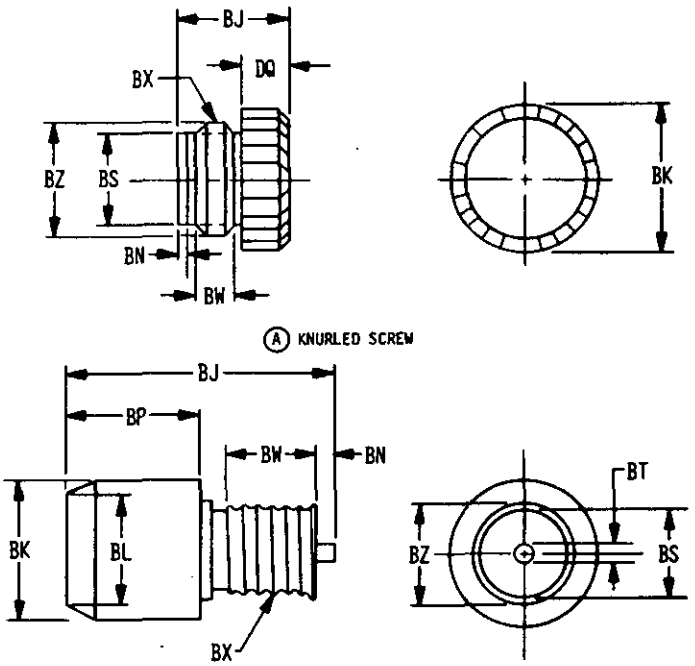




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.




① S-2



② S-3



③ S-6



④ C-1



⑤ C-2F




⑥ C-2R

◯ STYLE NUMBER

304-16-1



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

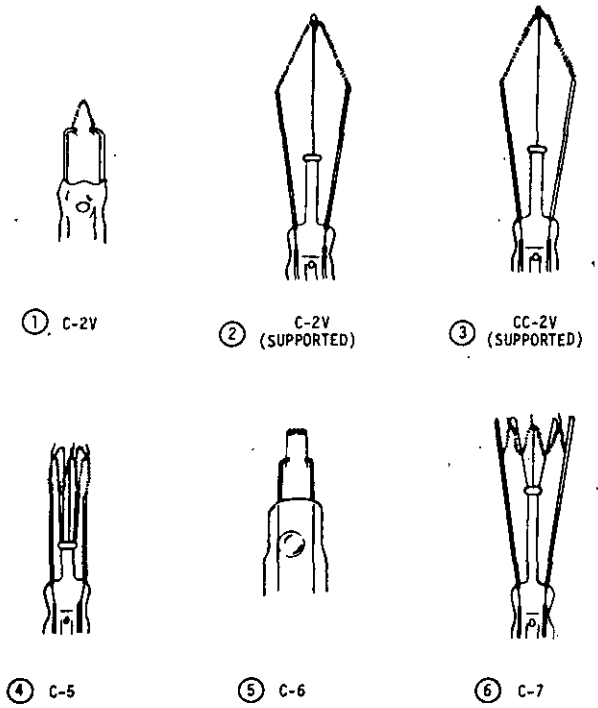

① C-2V

② C-2V (SUPPORTED)

③ CC-2V (SUPPORTED)

④ C-5

⑤ C-6


⑥ C-7

○ STYLE NUMBER

304-16-2




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

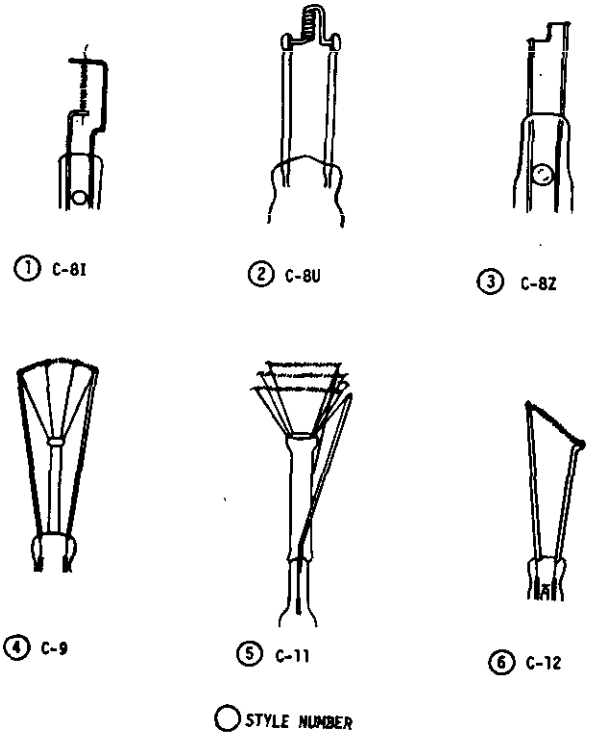



304-16-3




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.




① C-13




② C-13 (4 LEGS)




③ C-13 (6 LEGS)



④ CC-13



⑤ 2C-6



⑥ CC-6

○ STYLE NUMBER

304-16-4



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.



① 2CC-6




② 3CC-6



③ 2C-2R



④ C-2V/C-2V



⑤ C-2V/C-12




⑥ C-2V/C-6

○ STYLE NUMBER

304-16-5




Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

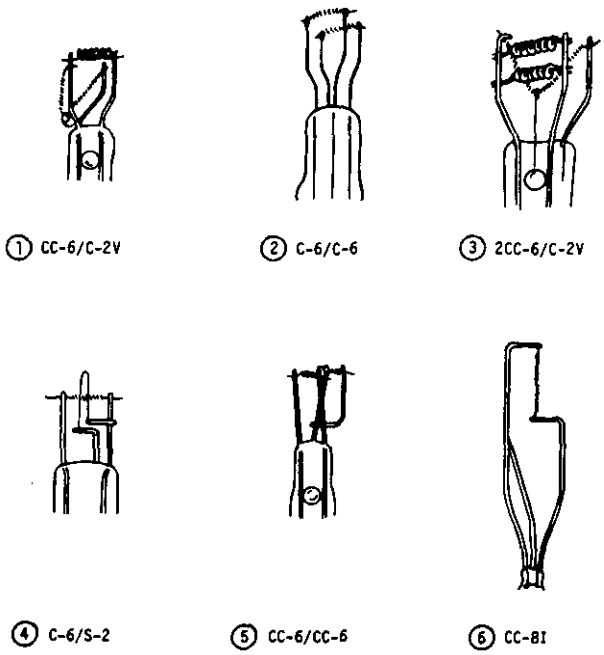




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

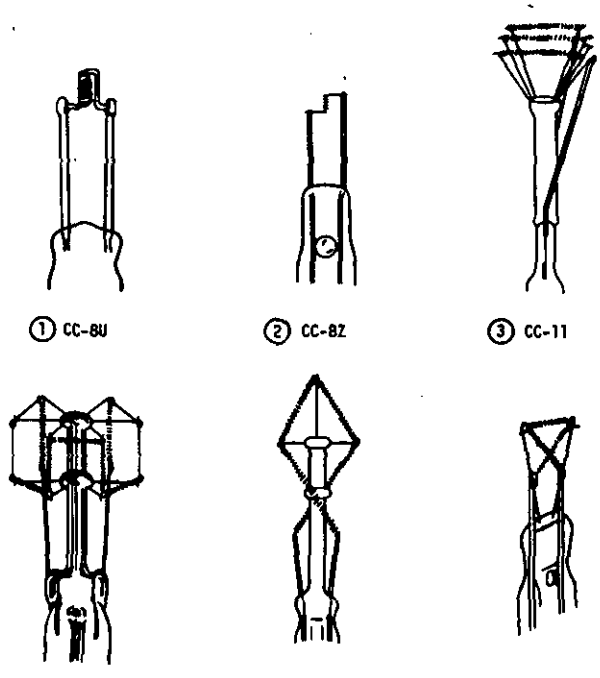

① CC-8U ② CC-8Z ③ CC-11


④ C-17 ⑤ C-20 ⑥ C-21

○ STYLE NUMBER

384-16-7



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.



① C-22



② C-23

◯ STYLE NUMBER

304-16-8



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

# APPENDIX B

# CHARACTERISTIC CODE INDEX



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

## CHARACTERISTIC CODE INDEX


| CHAR CODE | PAGE NO. | CHAR CODE | PAGE NO. | CHAR CODE | PAGE NO. | CHAR CODE | PAGE NO. |
|---|---|---|---|---|---|---|---|
| 0101 | 18 | 1582 | 22 | 1654 | 34 | 1750 | 38 |
| 0102 | 18 | 1584 | 22 | 1656 | 34 | 1751 | 40 |
| 0103 | 18 | 1586 | 22 | 1658 | 34 | 1752 | 38 |
| 0104 | 18 | 1588 | 22 | 1670 | 26 | 1753 | 40 |
| 0105 | 18 | 1590 | 24 | 1672 | 26 | 1754 | 38 |
| 0107 | 20 | 1591 | 24 | 1674 | 26 | 1755 | 40 |
| 0108 | 20 | 1592 | 24 | 1676 | 26 | 1756 | 38 |
| 0700 | 18 | 1594 | 24 | 1680 | 28 | 1758 | 40 |
| 0800 | 18 | 1600 | 24 | 1682 | 28 | 1760 | 40 |
| 1003 | 18 | 1602 | 24 | 1684 | 28 | 1762 | 40 |
| 1004 | 18 | 1604 | 24 | 1686 | 28 | 1764 | 40 |
| 1005 | 18 | 1606 | 24 | 1690 | 34 | 1766 | 40 |
| 1006 | 18 | 1608 | 24 | 1692 | 34 | 1768 | 40 |
| 1008 | 18 | 1610 | 24 | 1694 | 34 | 1770 | 48 |
| 1009 | 28 | 1612 | 26 | 1696 | 34 | 1771 | 48 |
| 1424 | 126 | 1614 | 26 | 1697 | 34 | 1772 | 48 |
| 1499 | 118 | 1615 | 26 | 1701 | 34 | 1774 | 48 |
| 1503 | 118 | 1616 | 30 | 1702 | 36 | 1776 | 48 |
| 1505 | 126 | 1617 | 26 | 1703 | 34 | 1780 | 48 |
| 1514 | 126 | 1618 | 30 | 1704 | 36 | 1781 | 48 |
| 1518 | 126 | 1619 | 26 | 1706 | 36 | 1782 | 48 |
| 1525 | 126 | 1620 | 30 | 1708 | 36 | 1783 | 50 |
| 1529 | 128 | 1621 | 26 | 1710 | 36 | 1784 | 48 |
| 1532 | 126 | 1623 | 28 | 1712 | 36 | 1785 | 50 |
| 1540 | 126 | 1624 | 32 | 1720 | 36 | 1786 | 48 |
| 1542 | 126 | 1625 | 28 | 1722 | 36 | 1787 | 50 |
| 1543 | 128 | 1626 | 32 | 1724 | 36 | 1789 | 50 |
| 1544 | 128 | 1627 | 28 | 1726 | 36 | 1790 | 50 |
| 1554 | 72 | 1629 | 28 | 1728 | 36 | 1791 | 50 |
| 1555 | 72 | 1630 | 32 | 1730 | 36 | 1792 | 50 |
| 1556 | 72 | 1631 | 32 | 1732 | 38 | 1793 | 50 |
| 1559 | 126 | 1633 | 32 | 1734 | 38 | 1794 | 50 |
| 1562 | 22 | 1635 | 32 | 1736 | 38 | 1796 | 50 |
| 1565 | 22 | 1636 | 32 | 1738 | 38 | 1798 | 50 |
| 1567 | 22 | 1637 | 32 | 1740 | 38 | 1800 | 50 |
| 1570 | 22 | 1643 | 32 | 1741 | 38 | 1802 | 52 |
| 1572 | 22 | 1646 | 32 | 1743 | 38 | 1804 | 52 |
| 1576 | 22 | 1648 | 32 | 1745 | 38 | 1806 | 52 |
| 1578 | 22 | 1650 | 34 | 1747 | 38 | 1808 | 52 |
| 1580 | 22 | 1652 | 34 | 1749 | 40 | 1810 | 52 |




Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

## CHARACTERISTIC CODE INDEX (CONT)

| CHAR CODE | PAGE NO. | CHAR CODE | PAGE NO. | CHAR CODE | PAGE NO. | CHAR CODE | PAGE NO. |
|---|---|---|---|---|---|---|---|
| 1812 | 52 | 1874 | 64 | 1972 | 68 | 2210 | 80 |
| 1814 | 52 | 1876 | 64 | 1974 | 68 | 2212 | 80 |
| 1816 | 52 | 1878 | 64 | 1976 | 68 | 2214 | 80 |
| 1818 | 52 | 1880 | 64 | 2000 | 70 | 2216 | 80 |
| 1820 | 52 | 1882 | 64 | 2002 | 70 | 2218 | 80 |
| 1822 | 54 | 1884 | 64 | 2004 | 70 | 2220 | 80 |
| 1824 | 54 | 1886 | 64 | 2006 | 70 | 2222 | 80 |
| 1826 | 54 | 1888 | 64 | 2010 | 74 | 2224 | 82 |
| 1828 | 54 | 1890 | 66 | 2012 | 74 | 2226 | 82 |
| 1830 | 54 | 1892 | 66 | 2014 | 74 | 2228 | 82 |
| 1832 | 54 | 1894 | 66 | 2016 | 74 | 2230 | 82 |
| 1834 | 54 | 1900 | 58 | 2018 | 74 | 2232 | 82 |
| 1836 | 54 | 1902 | 58 | 2020 | 74 | 2234 | 82 |
| 1838 | 54 | 1904 | 58 | 2100 | 74 | 2236 | 82 |
| 1840 | 54 | 1906 | 58 | 2102 | 74 | 2238 | 82 |
| 1841 | 62 | 1908 | 58 | 2103 | 74 | 2240 | 82 |
| 1842 | 54 | 1910 | 58 | 2105 | 76 | 2242 | 82 |
| 1843 | 62 | 1912 | 58 | 2108 | 76 | 2244 | 82 |
| 1844 | 54 | 1914 | 58 | 2110 | 76 | 2246 | 82 |
| 1845 | 56 | 1916 | 60 | 2120 | 76 | 2248 | 82 |
| 1846 | 62 | 1918 | 60 | 2122 | 76 | 2250 | 82 |
| 1848 | 56 | 1920 | 60 | 2124 | 76 | 2252 | 84 |
| 1850 | 56 | 1922 | 60 | 2126 | 76 | 2254 | 84 |
| 1851 | 62 | 1924 | 60 | 2128 | 76 | 2256 | 84 |
| 1852 | 56 | 1926 | 60 | 2130 | 76 | 2258 | 84 |
| 1853 | 62 | 1928 | 60 | 2132 | 76 | 2260 | 84 |
| 1854 | 56 | 1930 | 60 | 2134 | 78 | 2262 | 84 |
| 1855 | 62 | 1932 | 60 | 2136 | 78 | 2264 | 84 |
| 1856 | 56 | 1934 | 60 | 2138 | 78 | 2266 | 84 |
| 1857 | 62 | 1950 | 66 | 2140 | 78 | 2268 | 84 |
| 1858 | 56 | 1952 | 66 | 2142 | 78 | 2270 | 84 |
| 1860 | 56 | 1954 | 66 | 2144 | 78 | 2272 | 84 |
| 1861 | 62 | 1956 | 66 | 2146 | 78 | 2274 | 84 |
| 1862 | 56 | 1958 | 66 | 2190 | 78 | 2276 | 86 |
| 1863 | 62 | 1960 | 66 | 2192 | 80 | 2278 | 86 |
| 1864 | 56 | 1962 | 66 | 2200 | 80 | 2280 | 86 |
| 1866 | 56 | 1964 | 66 | 2202 | 80 | 2282 | 86 |
| 1868 | 58 | 1966 | 68 | 2204 | 80 | 2284 | 86 |
| 1870 | 58 | 1968 | 68 | 2206 | 80 | 2286 | 86 |
| 1872 | 64 | 1970 | 68 | 2208 | 80 | 2288 | 86 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

## CHARACTERISTIC CODE INDEX (CONT)

| CHAR CODE | PAGE NO. | CHAR CODE | PAGE NO. | CHAR CODE | PAGE NO. | CHAR CODE | PAGE NO. |
|---|---|---|---|---|---|---|---|
| 2290 | 86 | 2380 | 94 | 2810 | 104 | 3222 | 124 |
| 2292 | 86 | 2382 | 94 | 2812 | 106 | 3224 | 124 |
| 2294 | 86 | 2384 | 94 | 2820 | 106 | 3226 | 124 |
| 2295 | 86 | 2386 | 94 | 2822 | 106 | 3228 | 124 |
| 2296 | 86 | 2388 | 94 | 2824 | 106 | 3230 | 124 |
| 2298 | 88 | 2400 | 94 | 2826 | 108 | 3300 | 124 |
| 2300 | 88 | 2402 | 94 | 2828 | 108 | 3302 | 124 |
| 2302 | 88 | 2404 | 94 | 2830 | 108 | 3304 | 126 |
| 2304 | 88 | 2406 | 94 | 2832 | 108 | 3306 | 126 |
| 2306 | 88 | 2408 | 94 | 2834 | 108 | 3308 | 126 |
| 2308 | 88 | 2410 | 96 | 2900 | 108 | 3320 | 126 |
| 2310 | 88 | 2412 | 96 | 2902 | 110 | 3324 | 128 |
| 2312 | 88 | 2414 | 96 | 2910 | 114 | 3326 | 128 |
| 2314 | 88 | 2500 | 96 | 2920 | 114 | 3328 | 128 |
| 2316 | 88 | 2502 | 96 | 3000 | 114 | 3330 | 128 |
| 2318 | 88 | 2504 | 96 | 3002 | 114 | 3344 | 128 |
| 2320 | 88 | 2506 | 96 | 3004 | 114 | 3346 | 128 |
| 2322 | 88 | 2510 | 96 | 3006 | 114 | 4681 | 124 |
| 2324 | 90 | 2512 | 98 | 3008 | 114 | 4713 | 124 |
| 2326 | 90 | 2600 | 98 | 3020 | 120 | 4714 | 124 |
| 2328 | 90 | 2602 | 98 | 3022 | 120 | 4715 | 124 |
| 2332 | 90 | 2604 | 98 | 3024 | 120 | 4716 | 72 |
| 2334 | 90 | 2610 | 98 | 3026 | 120 | 4719 | 124 |
| 2336 | 90 | 2612 | 98 | 3100 | 120 | 4722 | 122 |
| 2340 | 90 | 2614 | 98 | 3102 | 120 | 4732 | 110 |
| 2342 | 90 | 2616 | 98 | 3104 | 120 | 4734 | 110 |
| 2344 | 90 | 2620 | 98 | 3106 | 120 | 4735 | 112 |
| 2348 | 90 | 2622 | 100 | 3120 | 120 | 4736 | 112 |
| 2350 | 92 | 2624 | 100 | 3122 | 122 | 4737 | 110 |
| 2352 | 92 | 2628 | 100 | 3124 | 122 | 4738 | 110 |
| 2356 | 92 | 2630 | 100 | 3126 | 122 | 4739 | 110 |
| 2358 | 92 | 2632 | 100 | 3128 | 122 | 4740 | 110 |
| 2360 | 92 | 2636 | 100 | 3130 | 122 | 4741 | 110 |
| 2364 | 92 | 2638 | 100 | 3132 | 122 | 4742 | 112 |
| 2366 | 92 | 2640 | 100 | 3200 | 122 | 4743 | 114 |
| 2368 | 92 | 2800 | 104 | 3202 | 122 | 4745 | 108 |
| 2372 | 92 | 2802 | 104 | 3204 | 122 | 4746 | 108 |
| 2374 | 92 | 2804 | 104 | 3206 | 122 | 4748 | 108 |
| 2376 | 92 | 2806 | 104 | 3208 | 122 | 4749 | 112 |
| 2378 | 94 | 2808 | 104 | 3220 | 124 | 4750 | 112 |



Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

## CHARACTERISTIC CODE INDEX (CONT)

| CHAR CODE | PAGE NO. | CHAR CODE | PAGE NO. | CHAR CODE | PAGE NO. | CHAR CODE | PAGE NO. |
|---|---|---|---|---|---|---|---|
| 4751 | 112 | 6326 | 112 | 6793 | 42 | 7022 | 46 |
| 4752 | 112 | 6327 | 116 | 6794 | 42 | 7023 | 46 |
| 4764 | 72 | 6328 | 112 | 6795 | 42 | 7024 | 46 |
| 4767 | 70 | 6329 | 112 | 6796 | 42 | 7025 | 44 |
| 4775 | 106 | 6330 | 112 | 6797 | 42 | 7026 | 44 |
| 4777 | 70 | 6331 | 114 | 6798 | 42 | 7027 | 44 |
| 4778 | 70 | 6332 | 114 | 6799 | 42 | 7028 | 44 |
| 4779 | 106 | 6333 | 114 | 6801 | 42 | 7029 | 44 |
| 4780 | 106 | 6334 | 72 | 6802 | 44 | 7030 | 44 |
| 4783 | 106 | 6335 | 72 | 6803 | 44 | 7305 | 116 |
| 4786 | 106 | 6336 | 72 | 6804 | 44 | 7306 | 116 |
| 4788 | 70 | 6337 | 72 | 6805 | 44 | 7307 | 118 |
| 4791 | 68 | 6338 | 116 | 6870 | 130 | 7308 | 118 |
| 4798 | 68 | 6339 | 116 | 6873 | 18 | 7309 | 118 |
| 4799 | 68 | 6340 | 116 | 6874 | 20 | 7311 | 116 |
| 4800 | 72 | 6341 | 116 | 6921 | 102 | 7312 | 116 |
| 4871 | 70 | 6342 | 116 | 6922 | 104 | 7313 | 116 |
| 4916 | 72 | 6343 | 118 | 6923 | 102 | 7315 | 114 |
| 4919 | 72 | 6344 | 118 | 6924 | 104 | 7317 | 116 |
| 4920 | 72 | 6345 | 118 | 6929 | 100 | 7318 | 116 |
| 4942 | 128 | 6346 | 118 | 6930 | 100 | 7572 | 28 |
| 4943 | 130 | 6347 | 118 | 6937 | 102 | 7629 | 132 |
| 4944 | 130 | 6348 | 118 | 6939 | 102 | 7630 | 132 |
| 4950 | 30 | 6349 | 118 | 6941 | 20 | | |
| 4963 | 96 | 6369 | 18 | 6942 | 20 | | |
| 4967 | 96 | 6370 | 108 | 6991 | 132 | | |
| 4972 | 96 | 6372 | 132 | 6992 | 132 | | |
| 4998 | 104 | 6696 | 102 | 6993 | 132 | | |
| 5209 | 130 | 6697 | 102 | 6994 | 132 | | |
| 6204 | 118 | 6698 | 102 | 6995 | 132 | | |
| 6245 | 106 | 6699 | 102 | 6996 | 46 | | |
| 6246 | 106 | 6700 | 102 | 6997 | 46 | | |
| 6247 | 106 | 6701 | 102 | 6998 | 46 | | |
| 6248 | 106 | 6706 | 104 | 6999 | 46 | | |
| 6320 | 110 | 6707 | 104 | 7001 | 130 | | |
| 6321 | 110 | 6710 | 102 | 7002 | 130 | | |
| 6322 | 110 | 6713 | 102 | 7003 | 130 | | |
| 6323 | 110 | 6790 | 42 | 7004 | 130 | | |
| 6324 | 112 | 6791 | 42 | 7005 | 130 | | |
| 6325 | 112 | 6792 | 42 | 7021 | 46 | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX

| | Page |
|---|---|
| Additional Part Marking | 132 |
| Additional Requirements | 130 |
| Altitude | 42 |
| Aperture Cards Required | 20 |
| Applicable Documents | 132 |
| Base Document | 18 |
| Base Style | 32 |
| City, State, Zip | 18 |
| Classification | 22 |
| Coating Adhesion | 48 |
| Color | 48 |
| Company Name/Command | 18 |
| Configuration | 28 |
| Contract Number/Office Symbol | 18 |
| Control, Source | 18 |
| Control, Specification | 20 |
| Cover Glass | 34 |
| Date | 18 |
| Design and Construction | 30 |
| Design Reliability | 44 |
| Electrical | 52 |
| Emitted Color | 62 |
| Filament | 30 |
| Finishes | 30 |
| Fluorescent Ballasts | 40 |
| Fluorescent Bulb Type | 38 |
| Fluorescent Characteristics | 40 |
| Format | 18 |
| Government Design Activity FSCM | 18 |
| Humidity | 68 |
| Illustrations | 30 |
| Impact | 74 |
| Initial Light Output | 78 |
| Initial Light Output Rating | 26 |
| Initial Wattage | 22 |
| Lamp Burning Position | 34 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

| | Page |
|---|---|
| Light Center Length | 34 |
| Materials | 30 |
| Maximum Beam Axis Deviation | 34 |
| Mercury Content | 40 |
| Minimum Rated Light at 100 Hours | 26 |
| Mounting Hardware | 130 |
| Nomenclature | 132 |
| Notes | 132 |
| Packaging | 132 |
| Part Marking | 132 |
| Part Number | 20 |
| Part Number Cross-Reference | 132 |
| Performance Characteristics | 130 |
| Phone Number | 18 |
| Product Identification | 36 |
| Quality Assurance Provisions | 132 |
| Random Drop | 96 |
| Rated Current | 22 |
| Rated Life | 24 |
| Rated Light Maintenance | 26 |
| Rated Voltage | 22 |
| Ratings | 22 |
| Reflector Lamp | 98 |
| Reliability Screening | 100 |
| Requester FSCM | 18 |
| Requester's Name | 18 |
| Required Life | 26 |
| Revision of AEDPS Document (Number) | 20 |
| Salt Fog | 104 |
| Scope | 20 |
| Seal | 108 |
| Shock | 114 |
| Source Table | 20 |
| Starting Method | 40 |
| Storage Conditions | 128 |
| Street/Building | 18 |
| Superseded Document | 132 |
| System Application | 18 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

| | Page |
|---|---|
| Tabulated Characteristics | 30 |
| Temperature | 42 |
| Temperature Resistance | 120 |
| Thermal Shock (Temperature Cycling) | 122 |
| Type | 22 |
| Units of Measure | 20, 28 |
| Vibration | 124 |
| Weight/Mass | 46 |
| Workmanship | 130 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-52A(MI), dated 02 March 1979 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-52A(MI), dated 02 March 1979 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE DOD-STD 3.5-52H/

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

**DD FORM 1 JAN 72 1426** REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander,
U.S. Army Missile R & D Command
ATTN: DRDMI-ESD
Redstone Arsenal, AL 35809

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.