DOD-STD-35-53A(MI)
2 February 1979
SUPERSEDING
MIL-STD-35-53(MI)
19 APRIL 1974

MILITARY STANDARD

ADAPTERS, ELECTRICAL

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM



Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

FSC EDS

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Adapters, Electrical
Automated Engineering
Document Preparation System

DOD-STD-35-53A(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-53A(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for Electrical Adapters.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	3
	2.1	Issues of documents	3
	2.2	Other publications	4
	3.	DEFINITIONS	5
	4.	GENERAL REQUIREMENTS	6
	4.1	Introduction	6
	4.2	Specification Requirement Sheet (SRS)	6
	4.3	Configuration	6
	4.3.1	Dimensions	6
	4.3.2	Illustrations	6
	4.4	Units of measure	6
	5.	DETAILED REQUIREMENTS	7
	5.1	Introduction	7
	5.2	MSE Formats	7
	5.3	Referenced documents	7
	5.4	Tabulation	7
	5.5	Keyword Code Indes (KCI) and Standard Paragraphs	9
	5.5.1	Interrelationship of Codes	9
	5.5.2	Automatic MSE Data	9
	5.5.3	DOD-STD-35 Tables	9

TABLES

Tables	I.	Title Index	2
	II.	Tabulation candidates	8

APPENDICES

Appendix	A.	Illustrations	90
	B.	Characteristic Code Index	124
		Index	129

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for Electrical Adapters.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request the desired title and the base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for us as the base document.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
ADAPTER ELECTRICAL	076001	MIL-C-3650	LC SERIES
		MS91596	UG-216B/U
		MS91614	UG-155B/U
		MS91616	UG-157B/U
		MS91618	UG-287B/U
		MS91619	UG-219B/U
		MS91620	UG-208B/U
		MIL-A-27434	BETWEEN AND WITHIN SERIES
		MS90253	UG-702/U
		MS90261	UG-703/U
		MS90572	UG-1531/U
		MS90573	UG-1532/U
		MS90574	UG-1373/U
		MS90575	UG-1374/U
		MS90576	UG-29C/U
		MS90577	UG-273C/U
		MS90578	UG-1441/U
		MS90579	UG-1375/U
		MIL-A-55339	BETWEEN AND WITHIN SERIES
		MIL-A-55512	UG-1312/U

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-C-39012	Connectors, Coaxial, Radio Frequency
MIL-I-17214	Indicator, Permeability; Low-Mu (Go-No-Go)

STANDARDS

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-202	Test Methods for Electronic and Electrical Components Parts
MIL-STD-220	Method of Insertion Loss Measurement
MIL-STD-810	Environmental Test Methods for Aerospace and Ground Equipment
MIL-STD-1285	Marking of Electrical and Electronic Parts
MIL-STD-1344	Test Methods for Electrical Connectors

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTME380	*Metric Practice Guide*
ASTMD1868	*Standard Method for Detection and Measurement of Discharge (Corona) Pulses in Evaluation of Insulation Systems*

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, Pa. 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Adapters, Electrical.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for Adapters, Electrical, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instruction of the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Adapters, Electrical.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described DOD-STD-35 are applicable to Adapters, Electrical.

4.3.2 Illustrations. Illustrations applicable to Adapters, Electrical are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table II provides codes for column headings which may be used for Electrical Adapters characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE II. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1570	INPEDANCE NOMINAL (OHMS)	1577	MAXIMUM WORKING VOLTAGE AT SEA LEVEL (DC)	1573	MAXIMUM WORKING VOLTAGE AT SEA LEVEL (RMS)
1579	MAXIMUM WORKING VOLTAGE AT ALTITUDE (DC)	1583	MAXIMUM WORKING VOLTAGE AT ALTITUDE (RMS)	1592	MAXIMUM FREQUENCY (GHZ)
1593	ADAPTER TYPE	1594	ADAPTER SERIES	1578	MINIMUM FREQUENCY (HZ)
1580	MAXIMUM FREQUENCY (HZ)	1582	MINIMUM FREQUENCY (KHZ)	1584	MAXIMUM FREQUENCY (KHZ)
1586	MINIMUM FREQUENCY (MHZ)	1588	MAXIMUM FREQUENCY (MHZ)	1590	MINIMUM FREQUENCY (GHZ)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.5 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.5.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.5.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.5.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT	0700
ONE SECTION DOCUMENT	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6874	THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).
0107	
0108	0108. SCOPE.
	SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.
	PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.
	PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.
6941	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.
6942	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION	
(TYPE)	1593
(SERIES)	1594
ALTITUDE RATING	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5060
SEA LEVEL TO (METERS)	5061
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5062
SEA LEVEL TO (METERS)	5063
TEMPERATURE RATING	
MAXIMUM OPERATING (DEGREES CELSIUS)	5069
MAXIMUM NONOPERATING (DEGREES CELSIUS)	5071
MINIMUM OPERATING (DEGREES CELSIUS)	5068
MINIMUM NONOPERATING (DEGREES CELSIUS)	5070

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1593	ADAPTER TYPE 1593 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1594	ADAPTER SERIES 1594 IN ACCORDANCE WITH BASE DOCUMENT SHALL APPLY.
	ALTITUDE RATING.
5060	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5060 FEET.
5061	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5061 METERS.
5062	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA TO 5062 FEET.
5063	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA TO 5063 METERS.
	TEMPERATURE RATING.
5069	THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS.
5071	THE MAXIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5071 DEGREES CELSIUS.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.
5070	THE MINIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5070 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELECTRICAL RATINGS	
FREQUENCY RANGE (SELECT ONE)	
MINIMUM (HERTZ)	1578
*MAXIMUM (HERTZ)	1580
MINIMUM (KILOHERTZ)	1582
*MAXIMUM (KILOHERTZ)	1584
MINIMUM (MEGAHERTZ)	1586
*MAXIMUM (MEGAHERTZ)	1588
MINIMUM (GIGAHERTZ)	1590
*MAXIMUM (GIGAHERTZ)	1592
IMPEDANCE NOMINAL (OHMS)	1570
VOLTAGE RATING	
MAXIMUM WORKING VOLTAGE AT SEA LEVEL	
(VOLTS DC)	1577
(VOLTS RMS)	1573
MAXIMUM WORKING VOLTAGE AT ALTITUDE	
(VOLTS DC)	1579
(VOLTS RMS)	1583
ALTITUDE (SELECT ONE)	
(FEET)	1585
(METERS)	1587

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1578 1580	FREQUENCY RANGE. THE FREQUENCY RANGE OF THE ADAPTER SHALL BE 1578 TO 1580 HERTZ.
1582 1584	FREQUENCY RANGE. THE FREQUENCY RANGE OF THE ADAPTER SHALL BE 1582 TO 1584 KILOHERTZ.
1586 1588	FREQUENCY RANGE. THE FREQUENCY RANGE OF THE ADAPTER SHALL BE 1586 TO 1588 MEGAHERTZ.
1590 1592	FREQUENCY RANGE. THE FREQUENCY RANGE OF THE ADAPTER SHALL BE 1590 TO 1592 GIGAHERTZ.
1570	IMPEDANCE. THE NOMINAL IMPEDANCE OF THE ADAPTER SHALL BE 1570 OHM(S).
	VOLTAGE RATING.
1577	THE MAXIMUM WORKING VOLTAGE AT SEA LEVEL SHALL BE 1577 VOLT(S) DC.
1573	THE MAXIMUM WORKING VOLTAGE AT SEA LEVEL SHALL BE 1573 VOLT(S) RMS.
1579	THE MAXIMUM WORKING VOLTAGE AT ALTITUDE SHALL BE 1579 VOLT(S) DC.
1583	THE MAXIMUM WORKING VOLTAGE AT ALTITUDE SHALL BE 1583 VOLT(S) RMS.
1585	THE ALTITUDE RATING FOR VOLTAGE SHALL BE 1585 FEET.
1587	THE ALTITUDE RATING FOR VOLTAGE SHALL BE 1587 METER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
*UNITS (SELECT ONE)	
U.S.	
(INCHES)	7572
SI	
(MILLIMETERS)	7577
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950
NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.	
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	
MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE IX IS USED.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.

MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INCES (KCI)

CHARACTERISTIC NAME	CHAR CODE
METALS	
DISSIMILAR METALS.	7580
DESIGN AND CONSTRUCTION	
CONSTRUCTION	
HERMETICALLY SEALED.	1565
WEATHERPROOF.	1567
NON-WEATHERPROOF.	1595
PRESSURIZED.	1569
MATING END DESIGN	
MATING END DESIGN TABLE.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAGH
7580	METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.

DESIGN AND CONSTRUCTION.

1565	CONSTRUCTION. THE ADAPTER SHALL BE HERMETICALLY SEALED.
1567	CONSTRUCTION. THE ADAPTER SHALL BE WEATHERPROOF.
1595	CONSTRUCTION. THE ADAPTER SHALL BE NON-WEATHERPROOF.
1569	CONSTRUCTION. THE ADAPTER SHALL BE PRESSURIZED.

MATING END DESIGN. MATING END DESIGN SHALL BE IN ACCORDANCE WITH THE MATING END DESIGN TABLE.

MATING END DESIGN TABLE

MATING END	SERIES DESIGNATION
3101	3102
3104	3105
3107	3108
3110	3111

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
WEIGHT	
MAXIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024
AIR LEAKAGE (SEAL)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2100
NO VISIBLE INDICATION OF LEAKAGE.	2102
MAXIMUM LEAKAGE RATE (STD ATM CC/SEC)	2104
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2200

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7023	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).
7021	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).
2100	AIR LEAKAGE (SEAL). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2100.
2102	AIR LEAKAGE (SEAL). THERE SHALL BE NO VISIBLE BUBBLES INDICATIVE OF LEAKAGE.
2104	AIR LEAKAGE (SEAL). THE LEAKAGE RATE SHALL BE NOT GREATER THAN 2104 STD ATM CC/SEC.
2200	AIR LEAKAGE (SEAL). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2200.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
AIR LEAKAGE (SEAL) (CONT)	
TEST METHODS (CONT)	
PER METHOD 1008 OF MIL-STD-1344.	2202
MINIMUM PRESSURE DIFFERENTIAL (SELECT ONE)	
(STANDARD ATMOSPHERES)	2204
(PASCALS)	2215
TEST SAMPLE ORIENTATION SHALL BE ____	2206
REVERSE TESTING SHALL BE REQUIRED.	2208
CORONA	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1810
AS FOLLOWS:	2108
MINIMUM CORONA STARTING VOLTAGE (VOLTS)	2110
MINIMUM CORONA EXTINCTION VOLTAGE (VOLTS)	2112
MAXIMUM APPARENT CORONA CHARGE AT CORONA STARTING VOLTAGE (PICOCOULOMBS)	2114

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2202	AIR LEAKAGE (SEAL). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1008 OF MIL-STD-1344.
2204	THE PRESSURE DIFFERENTIAL SHALL BE NOT LESS THAN 2204 STANDARD ATMOSPHERE(S).
2215	THE PRESSURE DIFFERENTIAL SHALL BE NOT LESS THAN 2215 PASCAL(S).
2206	THE TEST SAMPLE ORIENTATION SHALL BE 2206.
2208	REVERSE TESTING SHALL BE REQUIRED.
1810	CORONA. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1810.
2108	CORONA. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2110	THE VOLTAGE AT WHICH CORONA IS CONTINUOUS FOR MORE THAN 20 SECONDS (CORONA STARTING VOLTAGE) SHALL BE NOT LESS THAN 2110 VOLT(S).
2112	THE VOLTAGE AT WHICH CORONA DISAPPEARS COMPLETELY (CORONA EXTINCTION VOLTAGE) SHALL BE NOT LESS THAN 2112 VOLT(S).
2114	THE APPARENT CORONA CHARGE SHALL BE NOT GREATER THAN 2114 PICOCOULOMB(S) AT THE CORONA STARTING VOLTAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTICS NAME	CHAR CODE
CORONA (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM CORONA CHARGE (PICOCOULOMBS)	2116
*AT TEST VOLTAGE (VOLTS)	2118
NO EVIDENCE OF SUBSTAINED CORONA DISCHARGE.	1812
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2210
PER ASTMD1868.	2212
EQUIPMENT SENSITIVITY (PICOCOULOMBS)	2214
TEST VOLTAGE (VOLTS)	2216
TEST VOLTAGE TYPE (SELECT ONE)	
DC.	2218
AC.	1798
TEST VOLTAGE (PERCENT OF RATED)	2222
TEST VOLTAGE FREQUENCY (HERTZ)	2224
TEST VOLTAGE (VOLTS, RMS) SUPERIMPOSED ON	2226
*VOLTAGE (VOLTS, DC)	2228

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2116 2118	THE APPARENT CORONA CHARGE SHALL BE NOT GREATER THAN 2116 PICOCOULOMB(S) AT 2118 VOLT(S).
1812	THERE SHALL BE NO EVIDENCE OF SUBSTAINED CORONA DISCHARGE.
2210	CORONA. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2210.
2212	CORONA. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD1868.
2214	THE EQUIPMENT SHALL HAVE THE CAPABILITY OF DETECTING A PULSE LEVEL OF 2214 PICOCOULOMB(S).
2216	THE TEST VOLTAGE SHALL BE 2216 VOLT(S).
2218	THE TEST VOLTAGE SHALL BE DC.
1798	THE TEST VOLTAGE SHALL BE AC.
2222	THE TEST VOLTAGE SHALL BE 2222 PERCENT OF RATED VOLTAGE.
2224	THE TEST VOLTAGE FREQUENCY SHALL BE 2224 HERTZ.
2226 2228	THE TEST VOLTAGE SHALL BE 2226 VOLT(S) RMS SUPERIMPOSED ON A DC VOLTAGE OF 2228 VOLT(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTICS NAME	CHAR CODE
CORONA (CONT)	
PER ASTMD1868 (CONT)	
TEST PRESSURE AT ALTITUDE (SELECT ONE)	
(FEET)	1800
METERS)	2220
CABLED MATING CONNECTOR PART NUMBER ____	1802
CABLE TYPE ____	1804
CABLE LENGTH (SELECT ONE)	
(INCHES)	1806
(METERS)	2230
CONTACT RETENTION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1696
AS FOLLOWS:	2119
NO DISPLACEMENT OF CENTER CONTACT.	2120
NO ROTATION OF CENTER CONTACT.	1712
MAX CONTACT DISPLACEMENT (SELECT ONE)	
(INCHES)	2121
(MILLIMETERS)	2122

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1800	THE TEST PRESSURE SHALL BE AT AN ALTITUDE OF 1800 FEET.
2220	THE TEST PRESSURE SHALL BE AT AN ALTITUDE OF 2220 METER(S).
1802	THE CABLED MATING CONNECTOR PART NUMBER SHALL BE 1802.
1804	THE CABLE SHALL BE 1804 TYPE.
1806	THE CABLE LENGTH SHALL BE 1806 INCH(S).
2230	THE CABLE LENGTH SHALL BE 2230 METER(S).
1696	CONTACT RETENTION. THE REQUIREMENTS SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1696.
2119	CONTACT RETENTION. THE REQUIREMENTS SHALL BE AS FOLLOWS:
2120	CONTACT SHALL NOT BE DISPLACED FROM SPECIFIED INTERFACE DIMENSIONS.
1712	THERE SHALL BE NO ROTATION OF CENTER CONTACT.
2121	CONTACT DISPLACEMENT SHALL NOT BE GREATER THAN 2121 INCH(S).
2122	CONTACT DISPLACEMENT SHALL NOT BE GREATER THAN 2122 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT RETENTION (CONT)	
TEST METHODS (CONT)	
PER BASE DOCUMENT EXCEPT ____	1688
PER MIL-STD-1344, METHOD 2007.	2232
TEST DURATION (SECONDS)	2234
DIRECTION OF FORCE ____	2236
AXIAL FORCE (SELECT ONE)	
(POUNDS)	1690
(NEWTON)	2238
TORQUE (SELECT ONE)	
(OUNCE-INCHES)	1704
(NEWTON METERS)	2250
CONTACT RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1630
AS FOLLOWS:	2124
INNER CONTACT (SELECT ONE)	
MAXIMUM RESISTANCE (MILLIOHMS)	1632
MAXIMUM VOLTAGE DROP (MILLIVOLTS)	2126

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1688	CONTACT RETENTION. TESTING SHALL BE IN ACCORDANCE WITH BASE DOCUMENT, EXCEPT 1688.
2232	CONTACT RETENTION. TESTING SHALL BE IN ACCORDANCE WITH METHOD 2007 OF MIL-STD-1344.
2234	CONTACT RETENTION. TEST DURATION SHALL BE 2234 SECOND(S).
2236	AXIAL FORCE SHALL BE APPLIED IN 2236 DIRECTION(S).
1690	AXIAL FORCE SHALL BE 1690 POUND(S).
2238	AXIAL FORCE SHALL BE 2238 NEWTON(S).
1704	THE APPLIED TORQUE SHALL BE 1704 OUNCE-INCH(S).
2250	THE APPLIED TORQUE SHALL BE 2250 NEWTON METER(S).
1630	CONTACT RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH BASE DOCUMENT, EXCEPT 1630.
2124	CONTACT RESISTANCE. THE REQUIREMENTS SHALL BE AS FOLLOWS:
1632	THE INNER CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1632 MILLIOHM(S).
2126	THE INNER CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2126 MILLIVOLT(S) DROP.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT RESISTANCE (CONT)	
AS FOLLOWS: (CONT)	
OUTER CONTACT (SELECT ONE)	
MAXIMUM RESISTANCE (MILLIOHMS)	1634
MAXIMUM VOLTAGE DROP (MILLIVOLTS)	2128
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1624
PER MIL-STD-1344, METHOD 3004	2242
TEST CURRENT (SELECT ONE)	
(AMPERES)	2244
(MILLIAMPERES)	2246
COUPLING MECHANISM RETENTION FORCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1682
MECHANISM SHALL NOT BE DISLODGED FROM ADAPTER.	1684

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1634	THE OUTER CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1634 MILLIOHM(S).
2128	THE OUTER CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2128 MILLIVOLT(S) DROP.
1624	CONTACT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1624.
2242	CONTACT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3004 OF MIL-STD-1344.
2244	THE TEST CURRENT SHALL BE 2244 AMPERE(S).
2246	THE TEST CURRENT SHALL BE 2246 MILLIAMPERE(S).
1682	COUPLING MECHANISM RETENTION FORCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1682.
1684	COUPLING MECHANISM RETENTION FORCE. THE COUPLING MECHANISM SHALL NOT BE DISLODGED FROM THE ADAPTER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
COUPLING MECHANISM RETENTION FORCE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1674
PER MIL-A-55339	2251
TENSILE LOAD (SELECT ONE)	
(POUNDS)	1676
(NEWTONS)	2252
RATE OF APPLIED FORCE (SELECT ONE)	
(POUNDS PER MINUTE)	1678
(NEWTONS PER MINUTE)	2254
DURATION OF APPLIED FORCE (MINUTES)	2256
ROTATION UNDER LOAD IN EACH DIRECTION (NUMBER OR REVOLUTIONS)	2258
COUPLING PROOF TORQUE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1668
COUPLING MECHANISM SHALL NOT BE DISLODGED.	1670

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1674	COUPLING MECHANISM RETENTION FORCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1674.
2251	COUPLING MECHANISM RETENTION FORCE. TESTING SHALL BE IN ACCORDANCE WITH MIL-A-55339.
1676	THE TENSILE LOAD SHALL BE 1676 POUND(S).
2252	THE TENSILE LOAD SHALL BE 2252 NEWTON(S).
1678	THE TENSILE LOAD SHALL BE APPLIED AT A RATE OF 1678 POUNDS PER MINUTE.
2254	THE TENSILE LOAD SHALL BE APPLIED AT A RATE OF 2254 NEWTON(S) PER MINUTE.
2256	THE LOAD SHALL BE APPLIED FOR NOT LESS THAN 2256 MINUTE(S).
2258	ROTATION UNDER LOAD, WITH RESPECT TO THE ADAPTER BODY, SHALL BE 2258 COMPLETE REVOLUTIONS IN EACH DIRECTION.
1668	COUPLING PROOF TORQUE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1668.
1670	COUPLING PROOF TORQUE. THE COUPLING MECHANISM SHALL NOT BE DISLODGED FROM THE ADAPTER.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
COUPLING PROOF TORQUE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1660
PER MIL-A-55339.	2260
TORQUE (SELECT ONE)	
(POUND-INCHES)	1662
(NEWTON METERS)	2262
TEST DURATION (MINUTES)	1664
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4908
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4906
MAXIMUM LEAKAGE (MILLIAMPERES)	4894
NO CORONA DISCHARGE.	2129

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1660	COUPLING PROOF TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1660.
2260	COUPLING PROOF TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-A-55339.
1662	THE APPLIED TORQUE SHALL BE 1662 POUND-INCH(S).
2262	THE APPLIED TORQUE SHALL BE 2262 NEWTON METER(S).
1664	TEST DURATION SHALL BE 1664 MINUTE(S).
4908	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4908.
4906	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4894	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4894 MILLIAMPERE(S).
2129	THERE SHALL BE NO CORONA DISCHARGE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4884
PER MIL-STD-1344, METHOD 3001.	2264
*TEST CONDITION (NUMBER)	2266
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4885
(VOLTS, AC)	4849
POINTS OF VOLTAGE APPLICATION ____	2268
SPECIAL PREPARATION ____	2269
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4900
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4902
(MILLIAMPERES)	6310

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4884	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4884.
2264	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3001 OF MIL-STD-1344.
2266	TEST CONDITION 2266 SHALL APPLY.
4885	TEST VOLTAGE SHALL BE 4885 VOLTS, DC.
4849	TEST VOLTAGE SHALL BE 4849 VOLTS, AC.
2268	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE 2268.
2269	SPECIAL PREPARATION OR CONDITIONS SHALL BE 2269.
4900	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4900 KILOVOLTAMPERE(S).
4902	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4902 AMPERE(S).
6310	THE SURGE CURRENT SHALL BE NOT GREATER THAN 6310 MILLIAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4874
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4856
MAXIMUM LEAKAGE (MILLIAMPERES)	4875
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4861
PER MIL-STD-1344, METHOD 3001.	2270
*TEST CONDITION (NUMBER)	2272
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4854
(VOLTS, AC)	4855
POINTS OF VOLTAGE APPLICATION ____	2274
SPECIAL PREPARATION ____	2275
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4870

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4874	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.
4856	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4875	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4875 MILLIAMPERE(S).
4861	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861.
2270	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3001 OF MIL-STD-1344.
2272	TEST CONDITION 2272 SHALL APPLY.
4854	TEST VOLTAGE SHALL BE 4854 VOLTS, DC.
4855	TEST VOLTAGE SHALL BE 4855 VOLTS, AC.
2274	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE 2274.
2275	SPECIAL PREPARATION OR CONDITIONS SHALL BE 2275.
4870	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4870 KILOVOLTAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
PER MIL-STD-1344, METHOD 3001. (CONT)	
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4717
(MILLIAMPERES)	4897
DURABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1606
NO EVIDENCE OF WEAR, DISPLACEMENT OF PHYSICAL DAMAGE.	2123
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	1598
PER MIL-STD-1344, METHOD 2016.	2276
CYCLES (NUMBER)	2278
CYCLING RATE (PER HOUR)	2280

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4717	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4717 AMPERE(S).
4897	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4897 MILLIAMPERE(S).
1606	DURABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1606.
2123	DURABILITY. THERE SHALL BE NO EVIDENCE OF UNEVEN WEAR ON ENGAGING HARDWARE, CONTACTS, OR GUIDE HARDWARE NOR EXCESSIVE REMOVAL OF PLATING ON CONTACTS. CONTACTS SHALL BE NOT DISPLACED, BROKEN OR BENT. INSERTS SHALL SHOW NO EVIDENCE OF PIERCING, BREAKING OR CHIPPING.
1598	DURABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1598.
2276	DURABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2016 OF MIL-STD-1344.
2278	THERE SHALL BE 2278 MATING AND UNMATING CYCLES.
2280	THE CYCLING RATE SHALL BE 2280 CYCLES PER HOUR.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FORCE TO ENGAGE AND DISENGAGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1646
AS FOLLOWS:	2134
MAXIMUM ENGAGING FORCE (SELECT ONE)	
(OUNCES)	2136
(POUNDS)	2138
(NEWTONS)	2140
MAXIMUM ENGAGING TORQUE (SELECT ONE)	
(OUNCE-INCHES)	2142
(POUND-INCHES)	2144
(NEWTON METERS)	2146
MAXIMUM DISENGAGING FORCE	
(OUNCES)	2148

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1646	FORCE TO ENGAGE AND DISENGAGE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1646.
2134	FORCE TO ENGAGE AND DISENGAGE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2136	THE ENGAGING LONGITUDINAL FORCE SHALL NOT BE GREATER THAN 2136 OUNCE(S).
2138	THE ENGAGING LONGITUDINAL FORCE SHALL NOT BE GREATER THAN 2138 POUND(S).
2140	THE ENGAGING LONGITUDINAL FORCE SHALL BE NOT GREATER THAN 2140 NEWTON(S).
2142	THE ENGAGING TORQUE SHALL BE NOT GREATER THAN 2142 OUNCE-INCH(S).
2144	THE ENGAGING TORQUE SHALL BE NOT GREATER THAN 2144 POUND-INCH(S).
2146	THE ENGAGING TORQUE SHALL BE NOT GREATER THAN 2146 NEWTON METER(S).
2148	THE ENGAGING LONGITUDINAL FORCE SHALL BE NOT GREATER THAN 2148 OUNCE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FORCE TO ENGAGE AND DISENGAGE (CONT)	
MAXIMUM DISENGAGING FORCE (CONT)	
(POUNDS)	2150
(NEWTONS)	2152
MINIMUM DISENGAGING FORCE (SELECT ONE)	
(OUNCES)	2153
(POUNDS)	2154
(NEWTONS)	2155
MAXIMUM DISENGAGING TORQUE (SELECT ONE)	
(OUNCE-INCHES)	2156
(POUND-INCHES)	2157
(NEWTON METERS)	2158
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1638
PER MIL-A-55339.	2282
STANDARD MATING PART PER DOCUMENT (DOC DES)	2284

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2150	THE DISENGAGING LONGITUDINAL FORCE SHALL BE NOT GREATER THAN 2150 POUND(S).
2152	THE DISENGAGING LONGITUDINAL FORCE SHALL BE NOT GREATER THAN 2152 NEWTON(S).
2153	THE DISENGAGING LONGITUDINAL FORCE SHALL BE NOT LESS THAN 2153 OUNCE(S).
2154	THE DISENGAGING LONGITUDINAL FORCE SHALL BE NOT LESS THAN 2154 POUND(S).
2155	THE DISENGAGING LONGITUDINAL FORCE SHALL BE NOT LESS THAN 2155 NEWTON(S).
2156	THE DISENGAGING TORQUE SHALL BE NOT GREATER THAN 2156 OUNCE-INCH(S).
2157	THE DISENGAGING TORQUE SHALL BE NOT GREATER THAN 2157 POUND-INCH(S).
2158	THE DISENGAGING TORQUE SHALL BE NOT GREATER THAN 2158 NEWTON METER(S).
1638	FORCE TO ENGAGE AND DISENGAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1638.
2282	FORCE TO ENGAGE AND DISENGAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-A-55339.
2284	THE JIG (STANDARD MATING PART) INTERFACE DIMENSIONS SHALL BE IN ACCORDANCE WITH 2284.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4798
NO EVIDENCE OF CORROSION OF PHYSICAL DAMAGE.	4799
NO DEGRADATION OF PERFORMANCE.	4815
REMAIN WITHIN SPECIFIED TOLERANCE.	4791
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	4795
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	4805
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4788
PER MIL-STD-1344, METHOD 1002.	2288

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4798	HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.
4799	HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
4815	THERE SHALL BE NO DEGRADATION OF PERFORMANCE.
4791	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4795	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4795 MEGOHM(S) AT HIGH HUMIDITY.
4805	INSULATION RESISTANCE SHALL BE NOT LESS THAT 4805 MEGOHM(S) AFTER DRYING.
4788	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.
2288	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1002 OF MIL-STD-1344.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
PER MIL-STD-1344, METHOD 1002. (CONT)	
*TYPE (SELECT ONE)	
I.	2290
*TEST CONDITION (LETTER)	2292
DURATION OF APPLIED VOLTAGE (HOURS)	2293
MINIMUM RELATIVE HUMIDITY (PERCENT)	1778
MAXIMUM RELATIVE HUMIDITY (PERCENT)	1780
II.	2296
STEP 7A SHALL NOT APPLY.	2298
III.	2300
STEP 7A SHALL NOT APPLY.	2302
POLARIZING VOLTAGE (DC)	2304
POINTS OF APPLICATION ____	2306
INITIAL MEASUREMENTS SHALL BE ____	2308
FINAL MEASUREMENTS SHALL BE MADE (SELECT ONE)	
AT HIGH HUMIDITY.	2310
UPON REMOVAL FROM HUMIDITY CHAMBER.	2312
AFTER DRYING.	2314

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2290	PROCEDURE TYPE I SHALL APPLY.
2292	TEST CONDITION LETTER 2292 SHALL APPLY.
2293	THE DURATION OF APPLICATION OF POLARIZING VOLTAGE SHALL BE 2293 HOUR(S).
1778	THE RELATIVE HUMIDITY SHALL BE NOT LESS THAN 1778 PERCENT.
1780	THE RELATIVE HUMIDITY SHALL BE NOT GREATER THAN 1780 PERCENT.
2296	PROCEDURE TYPE II SHALL APPLY.
2298	STEP 7A SHALL NOT APPLY.
2300	PROCEDURE TYPE III SHALL APPLY.
2302	STEP 7A SHALL NOT APPLY.
2304	POLARIZING VOLTAGE SHALL BE 2304 VOLTS DC.
2306	POINTS OF APPLICATION OF POLARIZING VOLTAGE SHALL BE 2306.
2308	INITIAL MEASUREMENTS SHALL BE 2308.
2310	FINAL MEASUREMENT(S) SHALL BE MADE AT HIGH HUMIDITY.
2312	FINAL MEASUREMENT(S) SHALL BE MADE UPON REMOVAL OF ITEM(S) FROM HUMIDITY CHAMBER.
2314	FINAL MEASUREMENT(S) SHALL BE MADE AFTER DRYING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMMERSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4819
NO EVIDENCE OF PHYSICAL DAMAGE.	4820
REMAIN WITHIN SPECIFIED TOLERANCE.	4822
MINIMUM INSULATION RESITANCE (MEGOHMS)	4825
NO LEAKAGE	2160
SHALL MEET MATING AND UNMATING FORCE REQUIREMENTS.	2162
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4809
PER MIL-STD-1344, METHOD 1016.	2316
TEST CONDITION (LETTER)	4811
MEASUREMENTS AFTER FINAL CYCLE (HOURS)	4812
TIME BEFORE MEASUREMENTS AFTER FINAL CYCLE (HOURS)	4814

Source: https://assist.dla.mil/ -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4819	IMMERSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4819.
4820	IMMERSION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4822	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4825	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 4825 MEGOHM(S).
2160	THERE SHALL BE NO LEAKAGE.
2162	CONNECTORS SHALL MEET MATING AND UNMATING FORCE REQUIREMENT(S).
4809	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4809.
2316	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1016 OF MIL-STD-1344.
4811	TEST CONDITION LETTER 4811 SHALL APPLY.
4812	FINAL MEASUREMENT(S) SHALL BE MADE WITHIN 4812 HOUR(S) AFTER FINAL CYCLE.
4814	MEASUREMENTS SHALL BE NOT MADE UNTIL 4814 HOUR(S) AFTER THE FINAL CYCLE.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMMERSION (CONT)	
PER MIL-STD-1344, METHOD 1016. (CONT)	
IMMERSION DEPTH (SELECT ONE)	
(FEET)	1730
(METERS)	2318
TEST FLUID	2320
DURATION OF TEST (SELECT ONE)	
(MINUTES)	2322
(HOURS)	1732
NUMBER OF CYCLES	2324
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1380
AS FOLLOWS:	6359
*MINIMUM INSULATION RESISTANCE (SELECT ONE)	
SINGLE TEST	
(MEGOHMS)	1386

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1730	IMMERSION DEPTH SHALL BE 1730 FEET.
2318	IMMERSION DEPTH SHALL BE 2318 METER(S).
2320	TEST FLUID SHALL BE 2320.
2322	DURATION OF IMMERSION SHALL BE 2322 MINUTES.
1732	DURATION OF IMMERSION SHALL BE 1732 HOURS.
2324	THERE SHALL BE 2324 CYCLES OF IMMERSION.
1380	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.
6359	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1386	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 1386 MEGOHM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
MINIMUM INSULATION RESISTANCE (CONT)	
MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	1384
*SECOND TEST (MEGOHMS)	1387
REMAIN WITHIN SPECIFIED TOLERANCE.	1388
NO EVIDENCE OF PHYSICAL DAMAGE.	1407
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1371
PER MIL-STD-1344, METHOD 3003.	2323
TEST VOLTAGE (VOLTS, DC)	1373
ELECTRIFICATION TIME (SECONDS)	1376
MAXIMUM MEASUREMENT ERROR AT REQUIRED VALUE (PERCENT)	1377
POINTS OF MEASUREMENT ____	2325
SPECIAL PREPARATIONS OR CONDITIONS ____	2326

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1384	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1384 MEGOHM(S) AT THE FIRST TEST TEMPERATURE.
1387	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1387 MEGOHM(S) AT THE SECOND TEST TEMPERATURE.
1388	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1407	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1371	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.
2323	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3003 OF MIL-STD-1344.
1373	TEST POTENTIAL SHALL BE 1373 VOLTS, DC.
1376	ELECTRIFICATION DURATION SHALL BE 1376 SECOND(S).
1377	THE MEASUREMENT ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1377 PERCENT.
2325	POINTS OF INSULATION RESISTANCE MEASUREMENT SHALL BE 2325.
2326	SPECIAL PREPARATIONS OR CONDITIONS SHALL BE 2326.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MATING CHARACTERISTICS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2007
PER MATING CHARACTERISTICS TABLE.	2008

NOTE: USE INCH-POUND OR SI UNITS OF MEASURE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2007 MATING CHARACTERISTICS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2007.

2008 MATING CHARACTERISTICS. THE MATING CHARACTERISTICS SHALL BE AS SPECIFIED IN THE MATING CHARACTERISTICS TABLE.

MATING CHARACTERISTICS TABLE

TEST PARAMETER	MATING END CONTACT A	B	C	D
CENTER CONTACT, OVERSIZE TEST PIN				
DIAMETER (IN)	2010	2027	2044	2061
DIAMETER (MM)	2600	2618	2636	2654
MIN INSERTION DEPTH (IN)	2011	2028	2045	2062
MIN INSERTION DEPTH (MM)	2601	2619	2637	2655
CENTER CONTACT, MAX DIA TEST PIN				
DIAMETER (IN)	2012	2029	2046	2063
DIAMETER (MM)	2602	2620	2638	2656
NO. INSERTIONS	2013	2030	2047	2064
MIN INSERTION DEPTH (IN)	2014	2031	2048	2065
MIN INSERTION DEPTH (MM)	2603	2621	2639	2657
MIN INSERTION FORCE (POUNDS)	2604	2622	2640	2670
MIN INSERTION FORCE (NEWTONS)	2605	2623	2641	2671
MAX INSERTION FORCE (POUNDS)	2015	2032	2049	2066
MAX INSERTION FORCE (NEWTONS)	2606	2624	2642	2658
CENTER CONTACT, MIN DIA TEST PIN				
DIAMETER (IN)	2016	2033	2050	2067
DIAMETER (MM)	2607	2625	2543	2659
NO. INSERTIONS	2017	2034	2051	2068
MIN INSERTION DEPTH (IN)	2018	2035	2052	2069
MIN INSERTION DEPTH (MM)	2608	2626	2644	2660
MIN WITHDRAWAL FORCE (OUNCES)	2019	2036	2053	2070
MIN WITHDRAWAL FORCE (NEWTONS)	2609	2627	2645	2661

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MATING CHARACTERISTICS (CONT)	
PER MATING CHARACTERISTICS TABLE. (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2002
PER MIL-A-55339.	2004

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

MATING CHARACTERISTICS TABLE (CONT)

TEST PARAMETER	MATING END CONTACT A	B	C	D
OUTER CONTACT, MIN DIA TEST RING				
DIAMETER (IN)	2020	2037	2054	2071
DIAMETER (MM)	2610	2628	2646	2662
NO. INSERTIONS	2021	2038	2055	2072
MIN INSERTION DEPTH (IN)	2022	2039	2056	2073
MIN INSERTION DEPTH (MM)	2611	2629	2647	2663
MIN INSERTION FORCE (POUNDS)	2023	2040	2057	2074
MIN INSERTION FORCE (NEWTONS)	2612	2630	2648	2664
MAX INSERTION FORCE (POUNDS)	2613	2631	2649	2665
MAX INSERTION FORCE (NEWTONS)	2614	2632	2650	2666
OUTER CONTACT, MAX DIA TEST RING				
DIAMETER (IN)	2024	2041	2058	2075
DIAMETER (MM)	2615	2633	2651	2667
NO. INSERTIONS	2025	2042	2059	2076
MIN INSERTION DEPTH (IN)	2026	2043	2060	2077
MIN INSERTION DEPTH (MM)	2616	2634	2652	2668
CONTACT AREA (SQUARE IN)	2078	2079	2080	2081
CONTACT AREA (SQUARE MM)	2617	2635	2653	2669

2002 MATING CHARACTERISTICS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2002.

2004 MATING CHARACTERISTICS. TESTING SHALL BE IN ACCORDANCE WITH MIL-A-55339.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAGNETIC PERMEABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1618
MAXIMUM PERMEABILITY (MU)	1620
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1612
PER MIL-STD-1344, METHOD 3006	2328
RF HIGH POTENTIAL WITHSTANDING VOLTAGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1852
NO BREAKDOWN OR FLASHOVER.	1854
MAXIMUM LEAKAGE CURRENT (MILLIAMPERES)	1856
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1832

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1618	MAGNETIC PERMEABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1618.
1620	MAGNETIC PERMEABILITY. THE PERMEABILITY SHALL BE NOT GREATER THAN 1620 MU.
1612	MAGNETIC PERMEABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1612.
2328	MAGNETIC PERMEABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3006 OF MIL-STD-1344.
1852	RF HIGH POTENTIAL WITHSTANDING VOLTAGE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1852.
1854	RF HIGH POTENTIAL WITHSTANDING VOLTAGE. THERE SHALL BE NO BREAKDOWN OR FLASHOVER OF THE ADAPTER.
1856	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 1856 MILLIAMPERE(S).
1832	RF HIGH POTENTIAL WITHSTANDING VOLTAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1832.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTICS NAME	CHAR CODE
RF HIGH POTENTIAL WITHSTANDING VOLTAGE (CONT)	
TEST METHODS (CONT)	
PER MIL-A-55339.	2330
TEST VOLTAGE (VOLTS RMS)	1834
TEST FREQUENCY (MEGAHERTZ)	1836
CABLED MATING CONNECTOR (PART NUMBER)	1838
TEST CABLE LENGTH (INCHES)	1840
DURATION OF TEST (MINUTES)	1842
MEASURE RF LEAKAGE CURRENT DURING TEST.	2331
RF INSERTION LOSS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1880
MAXIMUM RF INSERTION LOSS (DECIBELS)	1882
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1874
PER MIL-A-55339.	2332
TEST FREQUENCY (GIGAHERTZ)	1876

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2330	RF HIGH POTENTIAL WITHSTANDING VOLTAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-A-55339.
1834	THE TEST VOLTAGE SHALL BE 1834 VOLT(S) RMS.
1836	THE TEST FREQUENCY SHALL BE 1836 MEGAHERTZ.
1838	THE CABLED MATING CONNECTOR PART NUMBER SHALL BE 1838.
1840	THE TEST CABLE LENGTH SHALL BE 1840 INCHES.
1842	THE DURATION OF THE TEST SHALL BE 1842 MINUTES.
2331	THE RF LEAKAGE CURRENT SHALL BE MEASURED DURING TESTING.
1880	RF INSERTION LOSS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1880.
1882	RF INSERTION LOSS. THE RF INSERTION LOSS SHALL BE NOT GREATER THAN 1882 DECIBEL(S).
1874	RF INSERTION LOSS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH BASE DOCUMENT, EXCEPT 1874.
2332	RF INSERTION LOSS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-A-55339.
1876	THE TEST FREQUENCY SHALL BE 1876 GIGAHERTZ.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RF LEAKAGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1868
MINIMUM RF LEAKAGE (DECIBELS)	1870
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1860
PER MIL-A-55339.	2334
TEST FREQUENCY	
(MINIMUM GIGAHERTZ)	1862
*(MAXIMUM GIGAHERTZ)	1864
SALT SPRAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4878
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE.	4782
NO INCREASE IN FORCE TO ENGAGE AND DISENGAGE.	2164

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1868	RF LEAKAGE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1868.
1870	RF LEAKAGE. THE TOTAL RF LEAKAGE SHALL BE NOT LESS THAN 1870 DECIBEL(S).
1860	RF LEAKAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1860.
2334	RF LEAKAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE RF LEAKAGE TEST OF MIL-A-55339.
1862 1864	THE TEST FREQUENCY SHALL BE BETWEEN 1862 AND 1864 GIGAHERTZ.
4878	SALT SPRAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4878.
4782	SALT SPRAY. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
2164	THERE SHALL BE NO INCREASE IN FORCE TO ENGAGE AND DISENGAGE THE ADAPTER WITH ITS STANDARD MATING PART.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT SPRAY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4770
PER MIL-STD-1344, METHOD 1001.	2335
*TEST CONDITION (LETTER)	4772
MOUNTING (SELECT ONE)	
SPECIAL MOUNTING SHALL BE ____	2336
MOUNTING SHALL BE BY NORMAL METHOD.	4765
MOUNTING SHALL BE BY ANY SUITABLE METHOD.	4766
DRYING TEMPERATURE (DEGREES CELSIUS)	2338
DRYING PERIOD (HOURS)	4775
SHOCK DROP	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1762
ITEMS SHALL REMAIN MECHANICALLY OPERABLE AND WITHIN SPECIFIED TOLERANCES.	2166
NO EVIDENCE OF ELECTRICAL BREAKDOWN.	1769

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4770	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4770.
2335	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1001 OF MIL-STD-1344.
4772	TEST CONDITION LETTER 4772 SHALL APPLY.
2336	SPECIAL MOUNTING SHALL BE 2336.
4765	MOUNTING SHALL BE BY THE NORMAL METHOD.
4766	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
2338	DRYING TEMPERATURE SHALL BE 2338 DEGREES CELSIUS.
4775	DRYING PERIOD SHALL BE 4775 HOUR(S).
1762	SHOCK DROP. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1762.
2166	SHOCK DROP. ITEM(S) SHALL REMAIN MECHANICALLY OPERABLE AND WITHIN SPECIFIED TOLERANCES.
1769	THERE SHALL BE NO EVIDENCE OF ELECTRICAL BREAKDOWN.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK DROP (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1746
PER MIL-A-55512.	2338
SHOCK, SPECIFIED PULSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1508
NO EVIDENCE OF PHYSICAL DAMAGE.	1509
REMAIN WITHIN SPECIFIED TOLERANCE.	4703
MAXIMUM CONTACT RESISTANCE (MILLIOHMS)	2174
DISCONTINUITY DURING TEST (SELECT ONE)	
NO DISCONTINUITY.	1471
MAXIMUM (MICROSECONDS)	2176
MAXIMUM (MILLISECONDS)	2178
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1502

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1746	SHOCK DROP. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1746.
2338	SHOCK DROP. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-A-55512.
1508	SHOCK, SPECIFIED PULSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1508.
1509	SHOCK, SPECIFIED PULSE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4703	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
2174	THE MAXIMUM CONTACT RESISTANCE SHALL BE 2174 MILLIOHM(S).
1471	THERE SHALL BE NO DISCONTINUITY DURING THE TEST.
2176	THE DISCONTINUITY SHALL BE NOT GREATER THAN 2176 MICROSECOND(S).
2178	THE DISCONTINUITY SHALL BE NOT GREATER THAN 2178 MILLISECOND(S).
1502	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1502.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, SPECIFIED PULSE (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-1344, METHOD 2004.	2343
*TEST CONDITION (LETTER)	1504
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	4686
NORMAL MOUNTING METHOD.	4685
SPECIAL MOUNTING METHOD ____	2344
MAXIMUM ELECTRICAL LOAD (MILLIAMPERES)	2348
TEST SPECIMEN (SELECT ONE)	
MATED.	2350
UNMATED.	2352
MATING CONNECTOR SHALL BE A CABLED CONNECTOR PER MIL-C-39012.	2354
CABLED MATING CONNECTOR (PART NUMBER)	2356
TEMPERATURE CYCLING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2353

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2343	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2004 OF MIL-STD-1344.
1504	TEST CONDITION LETTER 1504 SHALL APPLY.
4686	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4685	MOUNTING SHALL BE BY THE NORMAL METHOD.
2344	SPECIAL MOUNTING METHOD SHALL BE 2344.
2348	THE ELECTRICAL LOAD SHALL BE NOT GREATER THAN 2348 MILLIAMPERES FOR ALL CONTACTS.
2350	THE TEST SPECIMEN SHALL BE MATED.
2352	THE TEST SPECIMEN SHALL BE UNMATED.
2354	MATING CONNECTOR SHALL BE A CABLED CONNECTOR PER MIL-C-39012.
2356	CABLED MATING CONNECTOR PART NUMBER SHALL BE 2356.
2353	TEMPERATURE CYCLING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2353.

Source: https://assist.dla.mil --> Downloaded: 20202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE CYCLING (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE.	2355
REMAIN WITHIN SPECIFIED TOLERANCE.	4726
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2357
PER MIL-STD-1344, METHOD 1003.	2361
*TEST CONDITION (LETTER)	4715
STEP 1 TEMPERATURE (DEGREES CELSIUS)	2434
EXPOSURE DURATION (SELECT ONE)	
(HOURS)	2435
(MINUTES)	2436
STEP 3 TEMPERATURE (DEGREES CELSIUS)	2437
EXPOSURE DURATION (SELECT ONE)	
(HOURS)	2438
(MINUTES)	2439
SPECIAL MOUNTING SHALL BE ____	2359

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2355	TEMPERATURE CYCLING. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4726	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
2357	TEMPERATURE CYCLING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2357.
2361	TEMPERATURE CYCLING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1003 OF MIL-STD-1344.
4715	TEST CONDITION LETTER 4715 SHALL APPLY.
2434	THE STEP 1 TEMPERATURE SHALL BE 2434 DEGREES CELSIUS.
2435	THE STEP 1 EXPOSURE DURATION SHALL BE NOT LESS THAN 2435 HOUR(S).
2436	THE STEP 1 EXPOSURE DURATION SHALL BE NOT LESS THAN 2436 MINUTE(S).
2437	THE STEP 3 TEMPERATURE SHALL BE 2437 DEGREES CELSIUS.
2438	THE STEP 3 EXPOSURE DURATION SHALL BE NOT LESS THAN 2438 HOUR(S).
2439	THE STEP 3 EXPOSURE DURATION SHALL BE NOT LESS THAN 2439 MINUTE(S).
2359	SPECIAL MOUNTING SHALL BE 2359.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4681
NO EVIDENCE OF PHYSICAL DAMAGE.	4682
NO DISCONTINUITY DURING TEST.	1374
REMAIN WITHIN SPECIFIED TOLERANCE.	1538
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1505
PER MIL-STD-1344, METHOD 2005.	2358
TEST CONDITIONS (SELECT ONE)	
TEST CONDITION NUMBER I.	2360
DURATION OF VIBRATION (HOURS)	2362
TEST CONDITION NUMBER II.	2364
TEST CONDITION NUMBER III.	2366
TEST CONDITION NUMBER IV.	2368

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4681	VIBRATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4681.
4682	VIBRATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1374	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1538	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1505	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1505.
2358	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2005 OF MIL-STD-1344.
2360	TEST CONDITION NUMBER I SHALL APPLY.
2362	DURATION OF VIBRATION IN EACH DIRECTION SHALL BE 2362 HOUR(S).
2364	TEST CONDITION NUMBER II SHALL APPLY.
2366	TEST CONDITION NUMBER III SHALL APPLY.
2368	TEST CONDITION NUMBER IV SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION (CONT)	
TEST CONDITIONS (CONT)	
TEST CONDITION NUMBER V.	2370
TEST CONDITION (LETTER)	2372
MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	2376
IN ACCORDANCE WITH (DOC DES)	2378
DURATION OF VIBRATION PER AXIS (SELECT ONE)	
3 MINUTES MINIMUM.	2380
15 MINUTES MINIMUM.	2382
1.5 HOURS MINIMUM.	2384
8 HOURS MINIMUM.	2386
DIRECTION OF MOTION (SELECT ONE)	
PERPENDICULAR TO MATING PLANE OF CONNECTOR.	2390
IN EACH OF THREE PERPENDICULAR PLANES.	2392

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2370	TEST CONDITION NUMBER V SHALL APPLY.
2372	TEST CONDITION LETTER 2372 SHALL APPLY.
2376	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
2378	MOUNTING SHALL BE IN ACCORDANCE WITH 2378.
2380	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 3 MINUTES.
2382	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 15 MINUTES.
2384	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 1.5 HOURS.
2386	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 8 HOURS.
2390	THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE MATING PLANE OF THE CONNECTOR(S) IN NORMAL MOUNTING POSITION.
2392	THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUALLY PERPENDICULAR PLANES.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION (CONT)	
TEST CONDITION NUMBER V. (CONT)	
TEST POINTS (NUMBER)	2394
TEST POINTS (LOCATION)	2396
TEST CONDITION NUMBER VI.	2398
TEST CONDITION (LETTER)	2400
MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	2404
IN ACCORDANCE WITH (DOC DES)	2406
DURATION OF VIBRATION PER AXIS (SELECT ONE)	
3 MINUTES MINIMUM.	2408
15 MINUTES MINIMUM.	2410
1.5 HOURS MINIMUM.	2412
8 HOURS MINIMUM.	2414
DIRECTION OF MOTION (SELECT ONE)	
PERPENDICULAR TO MATING PLANE OF CONNECTOR.	2416
IN EACH OF THREE PERPENDICULAR PLANES.	2418

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2394	THERE SHALL BE 2394 TEST POINT(S).
2396	TEST POINT(S) SHALL BE 2396.
2398	TEST CONDITION NUMBER VI SHALL APPLY.
2400	TEST CONDITION LETTER 2400 SHALL APPLY.
2404	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
2406	MOUNTING SHALL BE IN ACCORDANCE WITH 2406.
2408	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 3 MINUTES.
2410	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 15 MINUTES.
2412	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 1.5 HOURS.
2414	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 8 HOURS.
2416	THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE MATING PLANE OF THE CONNECTOR(S) IN NORMAL MOUNTING POSITION.
2418	THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTAULLY PERPENDICULAR PLANES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION (CONT)	
TEST CONDITION NUMBER VI. (CONT)	
TEST POINTS (NUMBER)	2420
TEST POINTS (LOCATION)	2422
TEST SPECIMEN SHALL BE (SELECT ONE)	
MATED.	2424
UNMATED.	2426
ELECTRICAL LOAD (MILLIAMPERES)	2428
MONITOR DISCONTINUITIES.	2430
METHOD FOR DETERMINING RESONANCE SHALL BE ____	2432
VOLTAGE STANDING WAVE RATIC (VSWR)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1926
MAXIMUM VSWR	1828
NO CORONA DISCHARGE.	2129
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1816

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2420	THERE SHALL BE 2420 TEST POINT(S).
2422	TEST POINT(S) SHALL BE 2422.
2424	TEST SPECIMEN SHALL BE A MATED ADAPTER.
2426	TEST SPECIMEN SHALL BE AN UNMATED ADAPTER.
2428	THE ELECTRICAL LOAD, ALL CONTACTS, SHALL BE NOT GREATER THAN 2428 MILLIAMPERE(S).
2430	CONNECTORS SHALL BE MONITORED FOR DISCONTINUITIES.
2432	THE METHOD FOR DETERMINING RESONANCE SHALL BE 2432.
1926	VOLTAGE STANDING WAVE RATIO (VSWR). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1926.
1828	VOLTAGE STANDING WAVE RATIO (VSWR). THE VOLTAGE STANDING WAVE RATIO SHALL BE NOT LESS THAN 1828.
2129	THERE SHALL BE NO CORONA DISCHARGE.
1816	VOLTAGE STANDING WAVE RATIO (VSWR). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1816.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VOLTAGE STANDING WAVE RATIO (VSWR) (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-1344, METHOD 3005.	1817
FREQUENCY (SELECT ONE)	
*(MINIMUM GIGAHERTZ)	1818
*(MAXIMUM GIGAHERTZ)	1820
(NOMINAL GIGAHERTZ)	2182
SYSTEM VSWR (MAXIMUM)	2183
STEP 2 SYSTEM VSWR (MAXIMUM)	2184
STEP 3 SYSTEM VSWR (MAXIMUM)	2185
CABLE ATTENUATION (DECIBELS)	2186
TEST CABLE SHALL BE ____	2188
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	
WORKMANSHIP	
(DOC DES)	6870

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1817	VOLTAGE STANDING WAVE RATIO (VSWR). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3005 OF MIL-STD-1344.
1818 1820	THE FREQUENCY RANGE SHALL BE 1818 TO 1820 GIGAHERTZ.
2182	THE NOMINAL FREQUENCY SHALL BE 2182 GIGAHERTZ.
2183	SYSTEM VSWR SHALL BE NOT GREATER THAN 2183.
2184	STEP 2 VSWR SHALL BE NOT GREATER THAN 2184 (F IN GIGAHERTZ).
2185	STEP 3 VSWR SHALL BE NOT GREATER THAN 2185 (F IN GIGAHERTZ).
2186	CABLE ATTENUATION SHALL BE NOT LESS THAN 2186 DECIBEL(S).
2188	TEST CABLE SHALL BE 2188.
	MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DEFINITION OF HERMETIC SEALING	
NOTE: AUTOMATIC WHEN CODE 1565 IS USED TO REQUIRE HERMETIC SEALING.	
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

DEFINITION OF HERMETIC SEALING. FOR THE PURPOSE OF THIS DOCUMENT, A HERMETICALLY-SEALED ITEM IS ONE IN WHICH THE ELEMENT IS CONTAINED WITHIN A SEALED ENCLOSURE OF CERAMIC GLASS OR METAL, OR A COMBINATION THEREOF, WHERE SEALING IS ACCOMPLISHED BY MATERIAL FUSION, WELDING, BRAZING OR SOLDERING.

Custodians:
Army-MI


Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU


Preparing activity:
Army-MI

(Project EDS-A270)


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

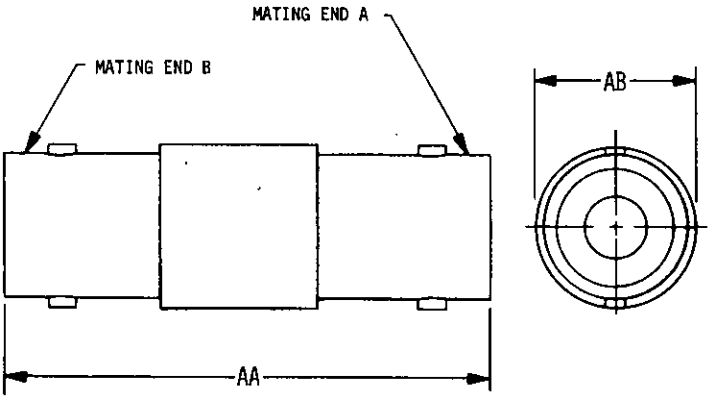

076-01-1

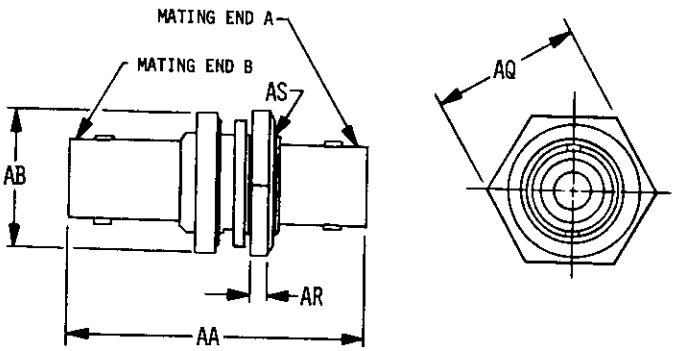


076-01-2

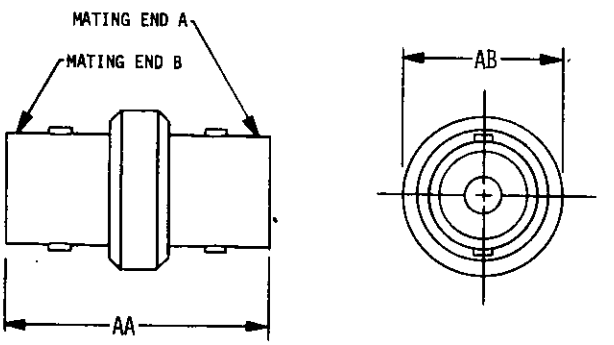

076-01-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

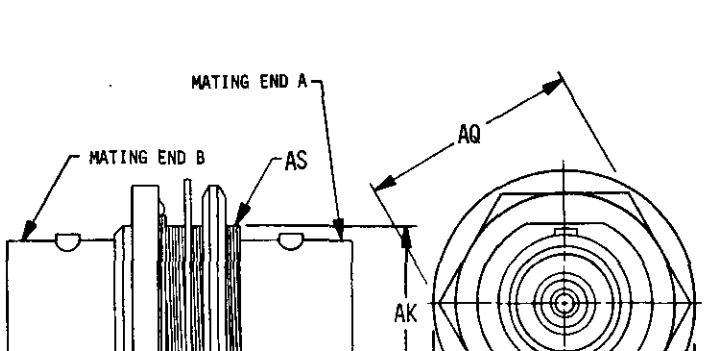


076-01-4




076-01-5


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

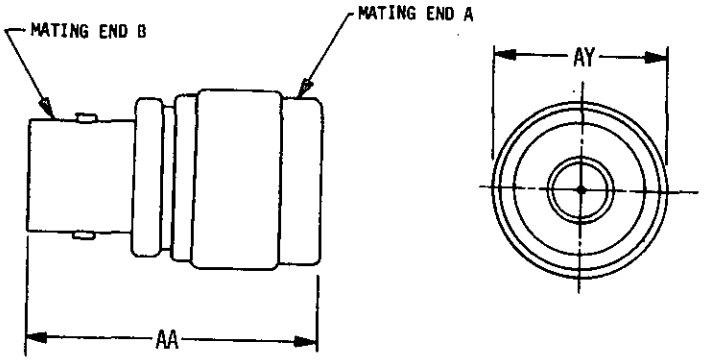

Ø76-Ø1-8

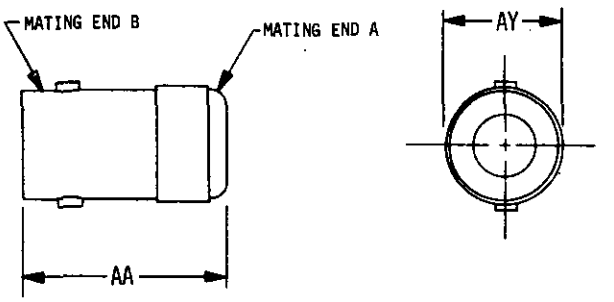


Ø76-Ø1-9

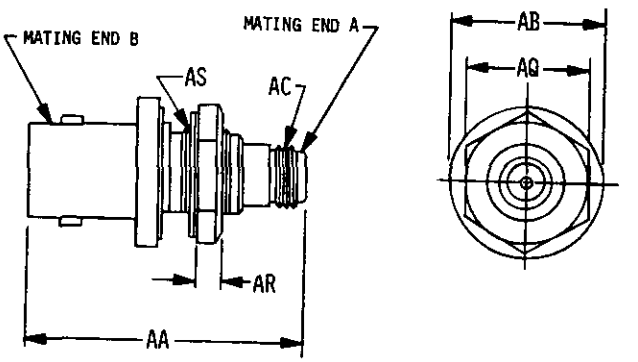


Ø76-Ø1-1Ø

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

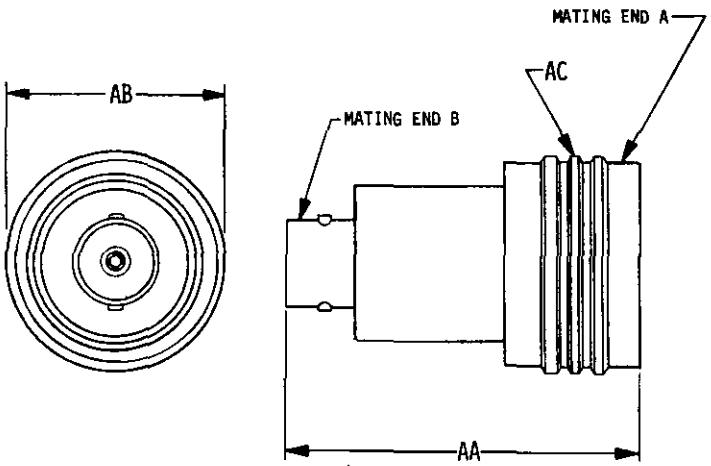


Ø76-Ø1-6

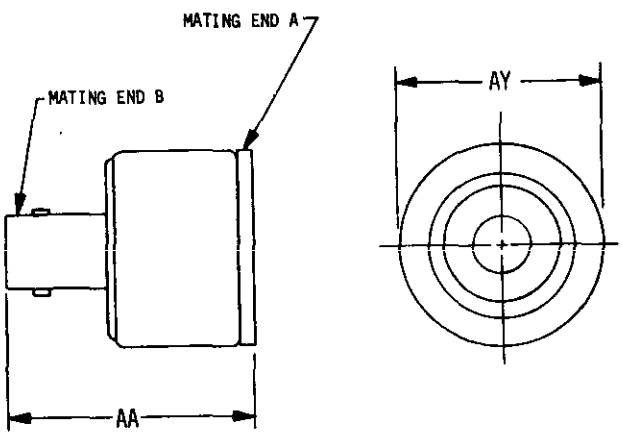


Ø76-Ø1-7

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

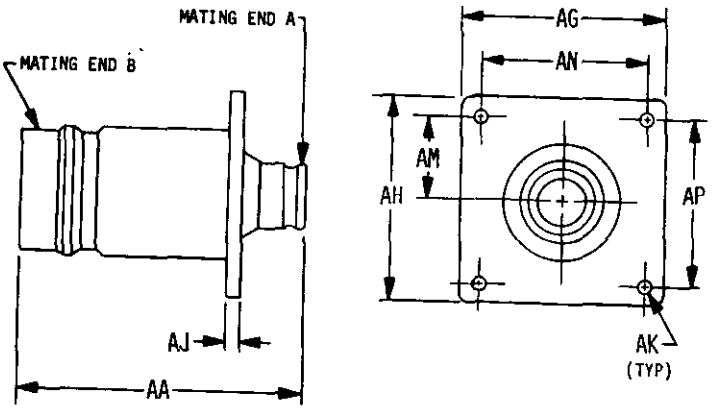


076-01-11

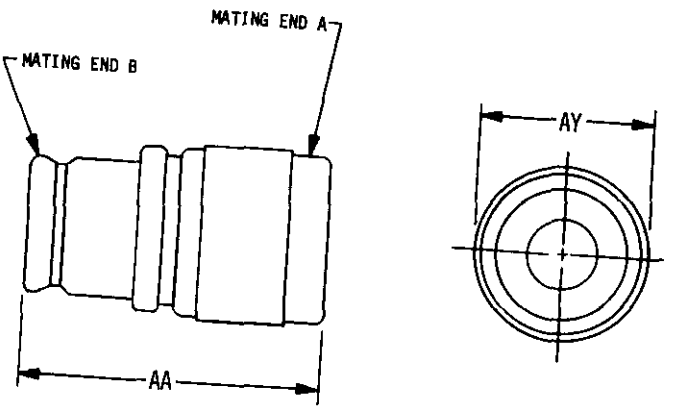


076-01-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

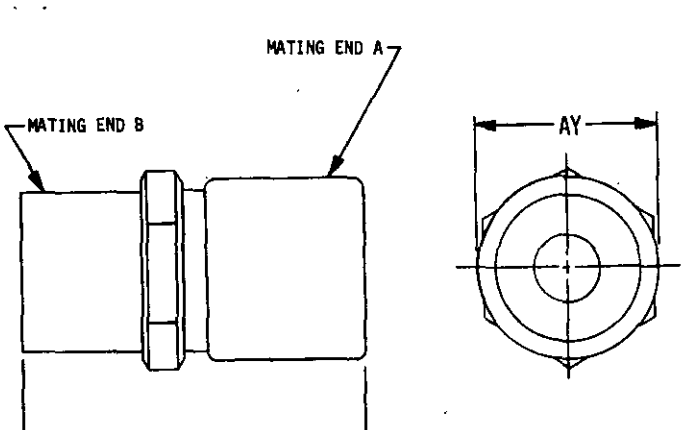


076-01-13

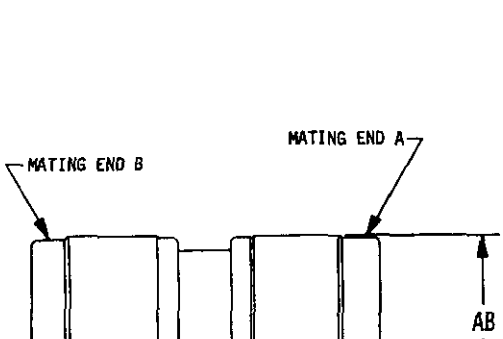


076-01-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

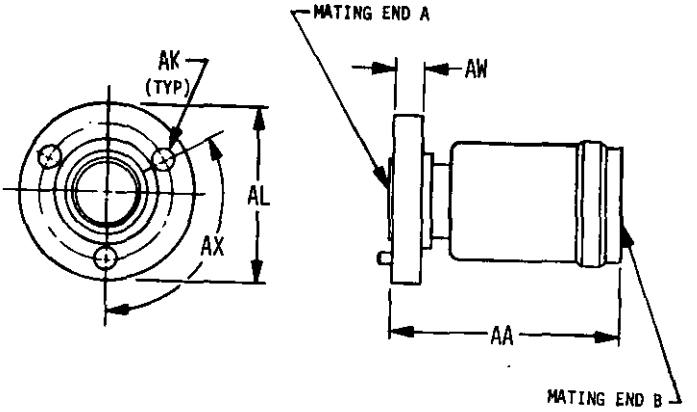


Ø76-Ø1-15

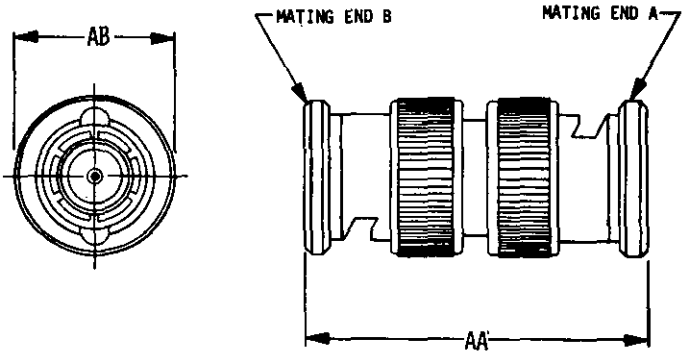


Ø76-Ø1-16

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

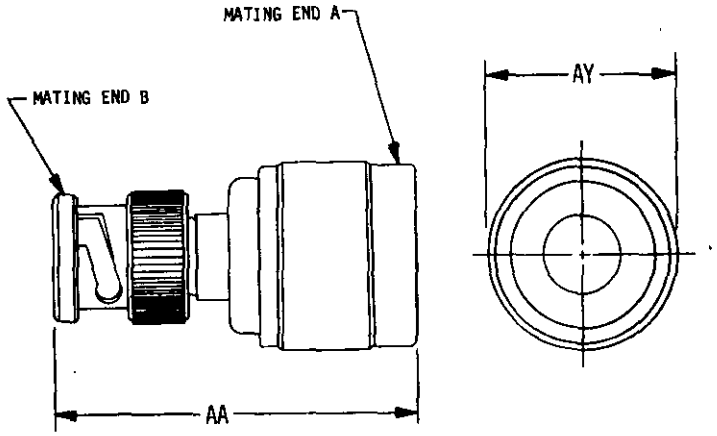


Ø76-Ø1-17

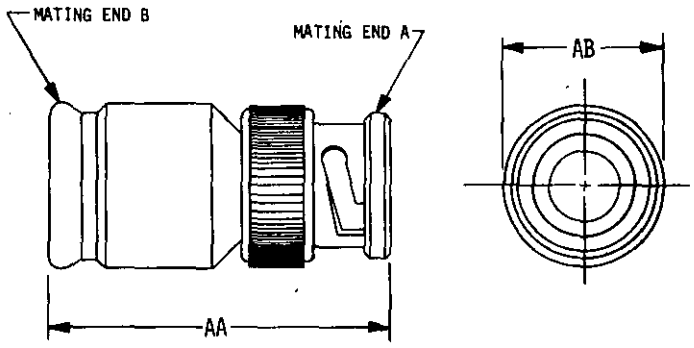


Ø76-Ø1-18

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

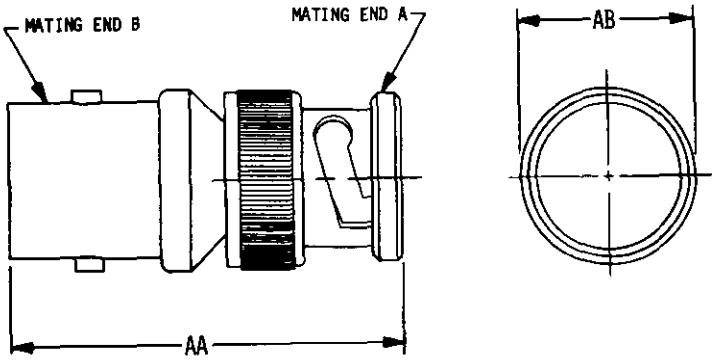


076-01-19

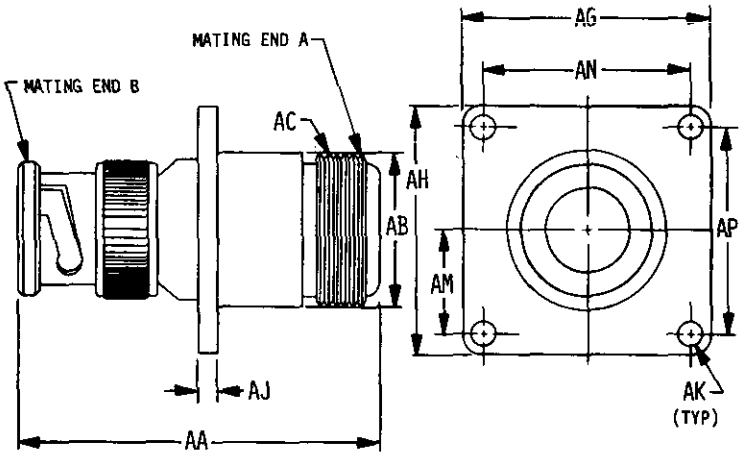


076-01-20

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

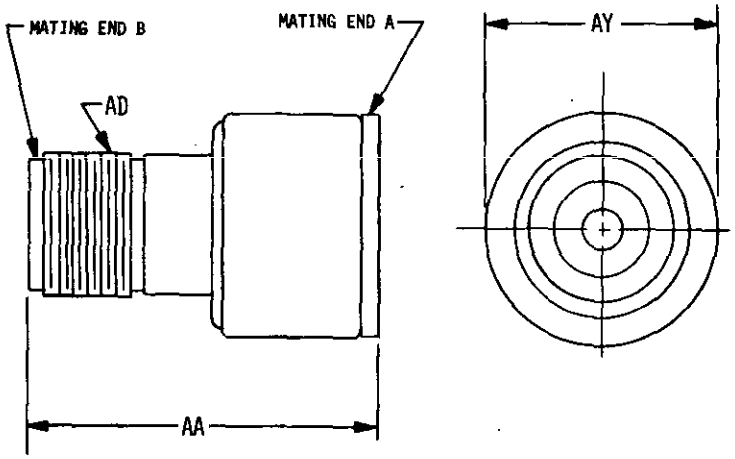


076-01-21

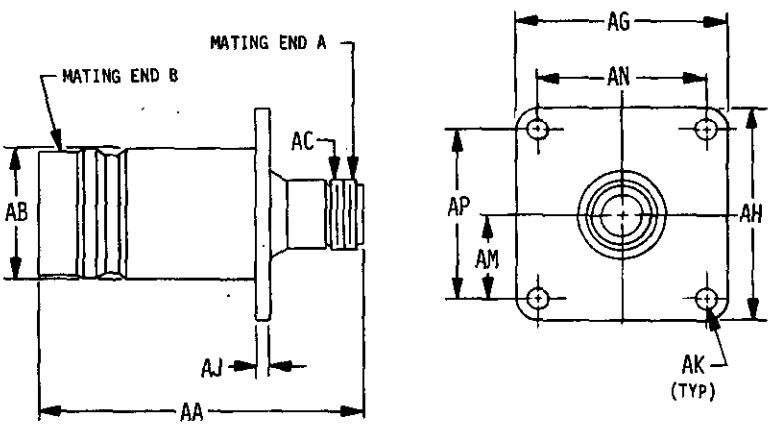


076-01-22


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

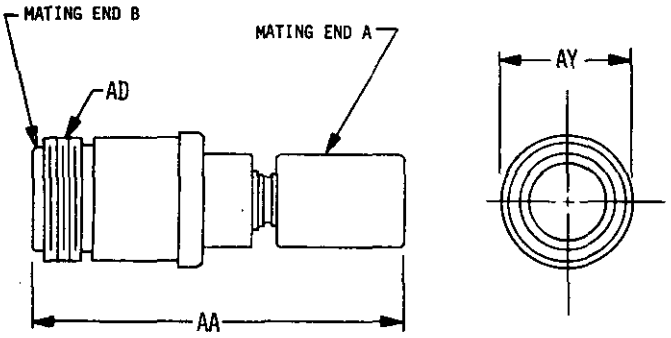

Ø76-Ø1-23

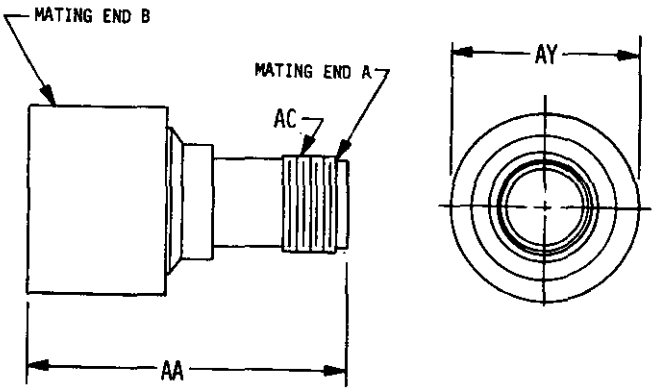


Ø76-Ø1-24

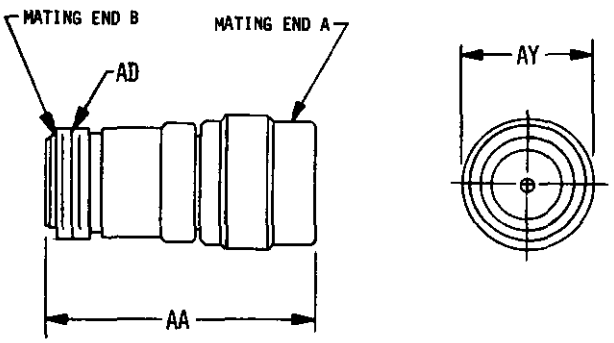


Ø76-Ø1-25

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

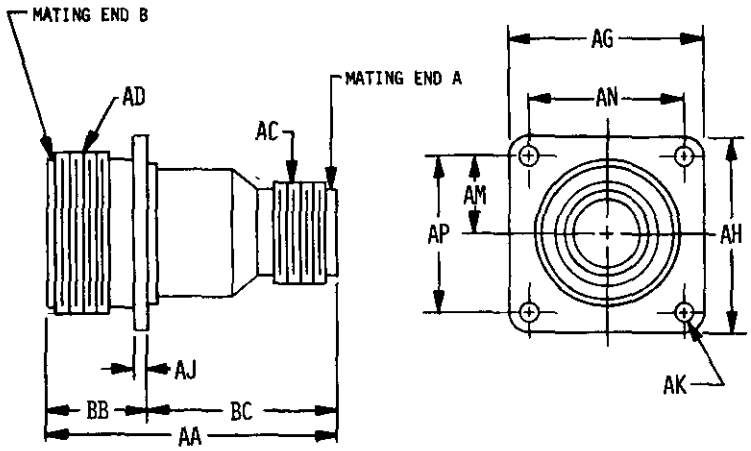


Ø76-Ø1-27

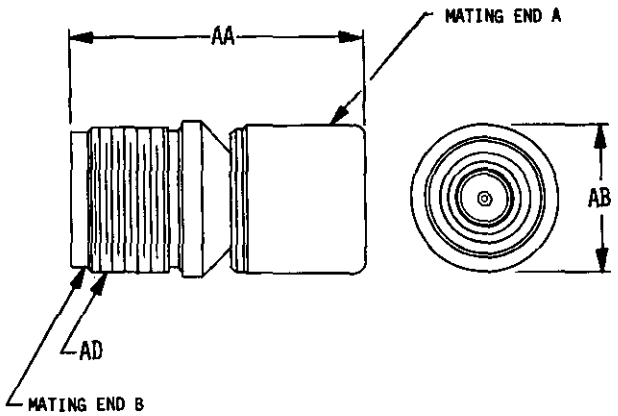


Ø76-Ø1-26

Source: https://assist.dla.mil -- Downloaded: 2026Ø1Ø-26T07:24Z
Check the source to verify that this is the current version before use.

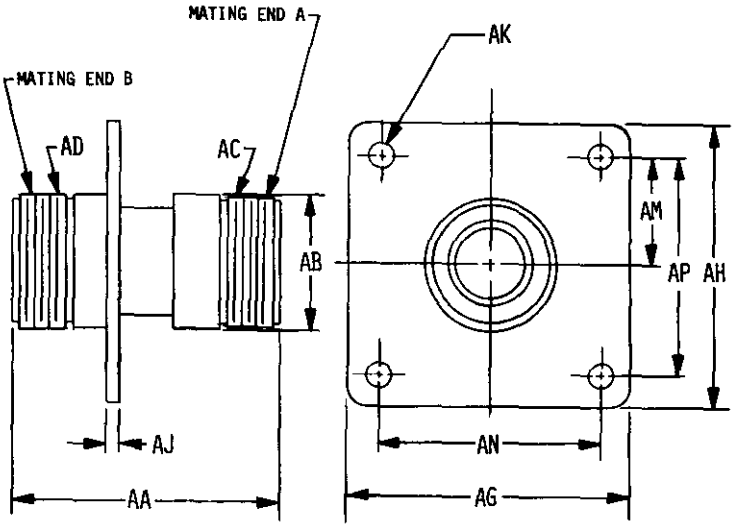


Ø76-Ø1-28

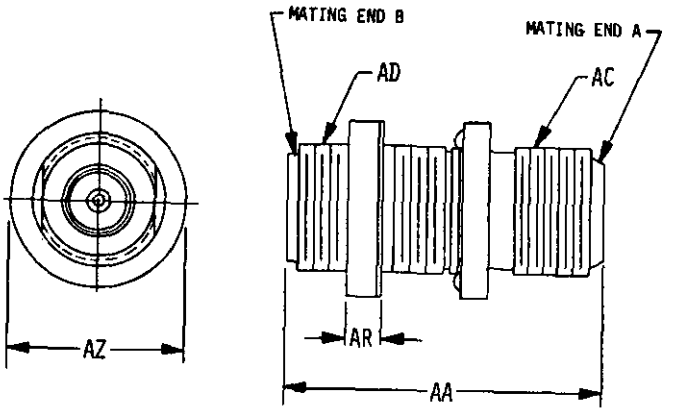


Ø76-Ø1-29

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

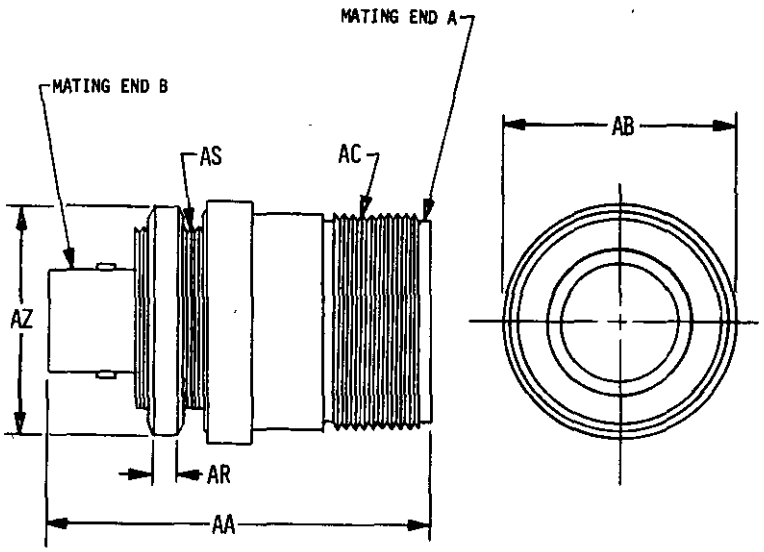


076-01-30

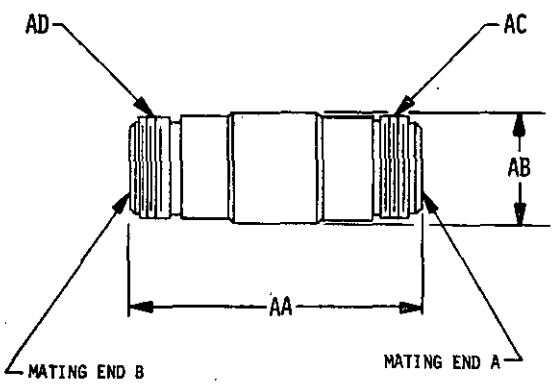


076-01-31

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

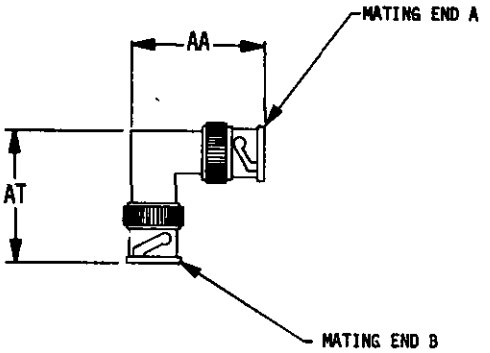


076-01-32

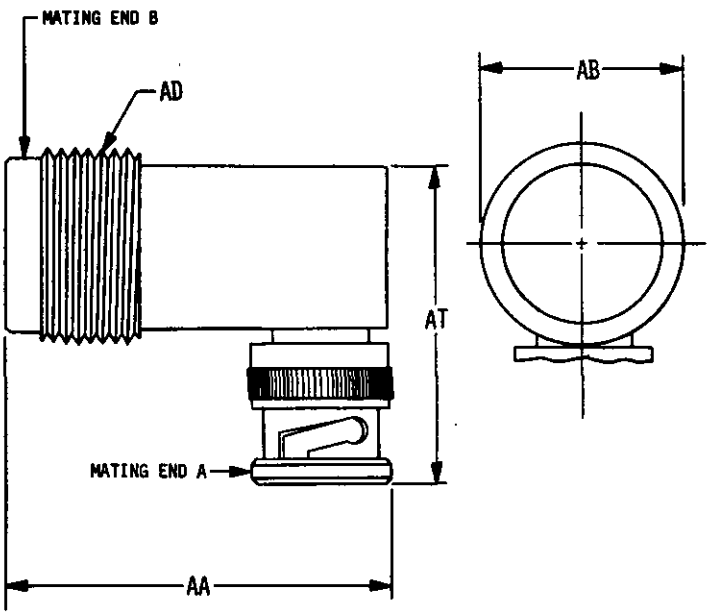


076-01-33

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

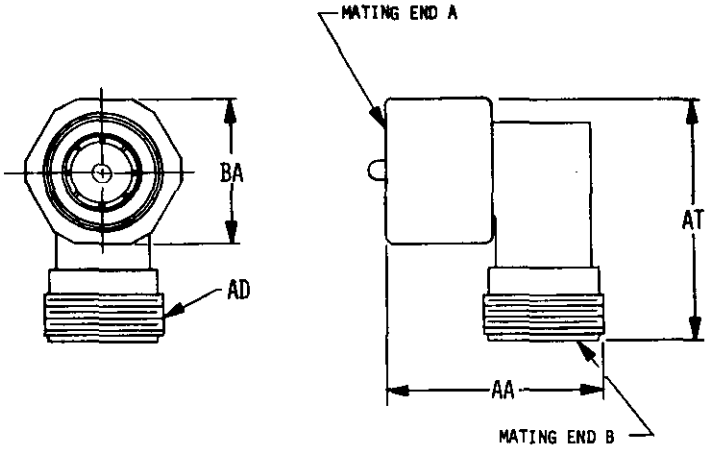


076-01-35

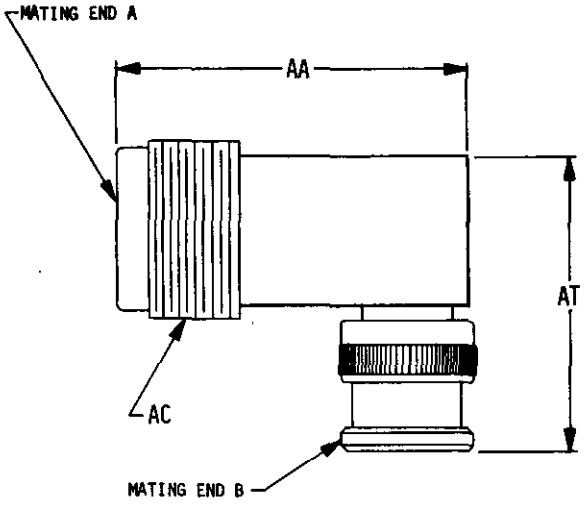


076-01-34

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

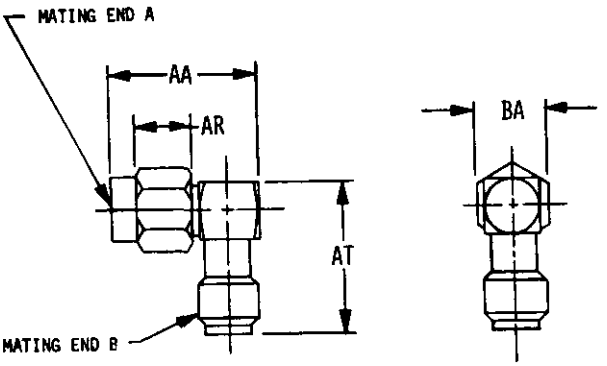


076-01-36

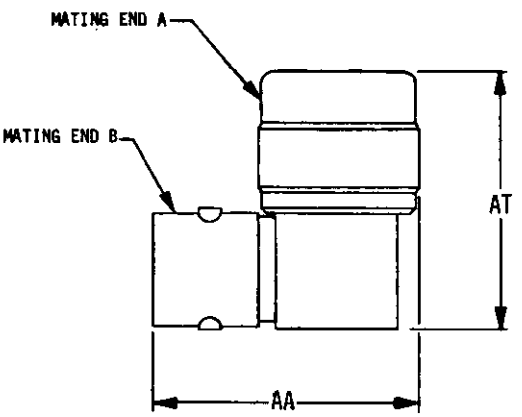


076-01-37

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

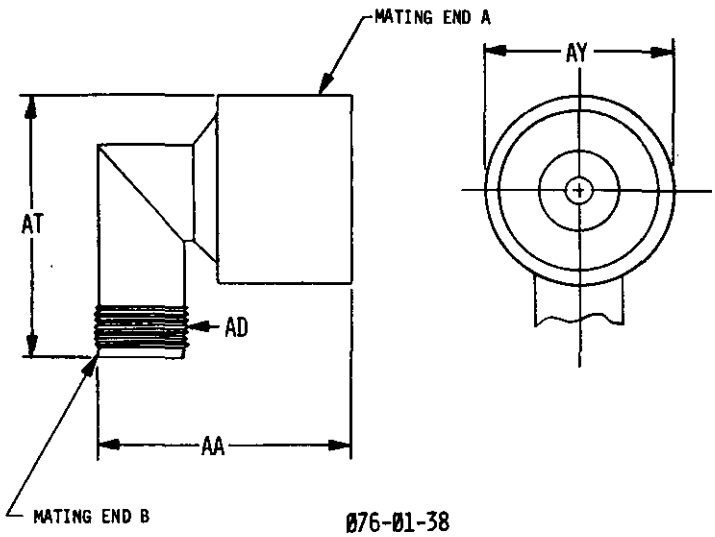


076-01-38

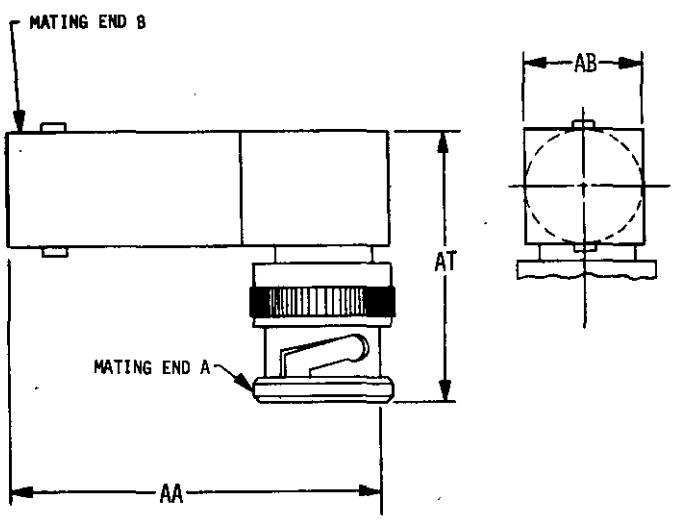


076-01-39

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

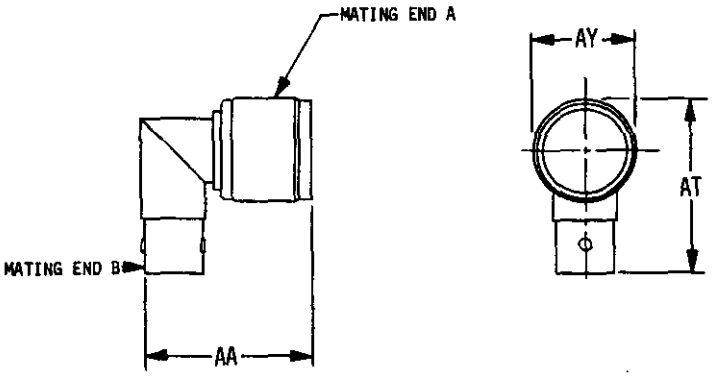


076-01-40

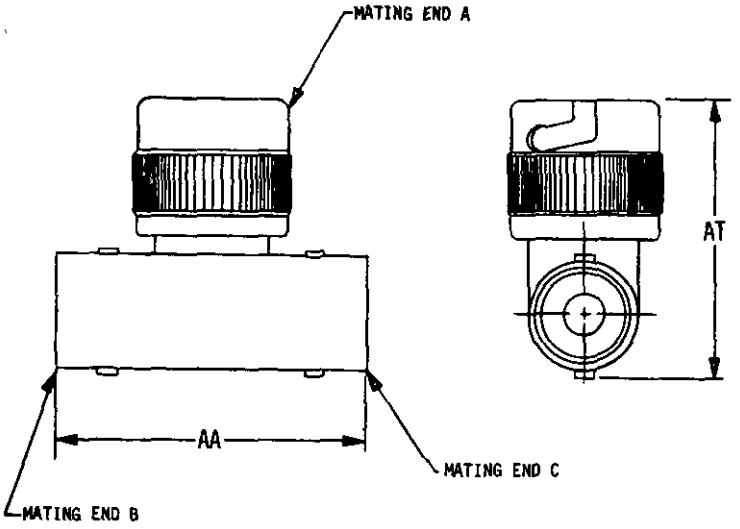


076-01-41

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

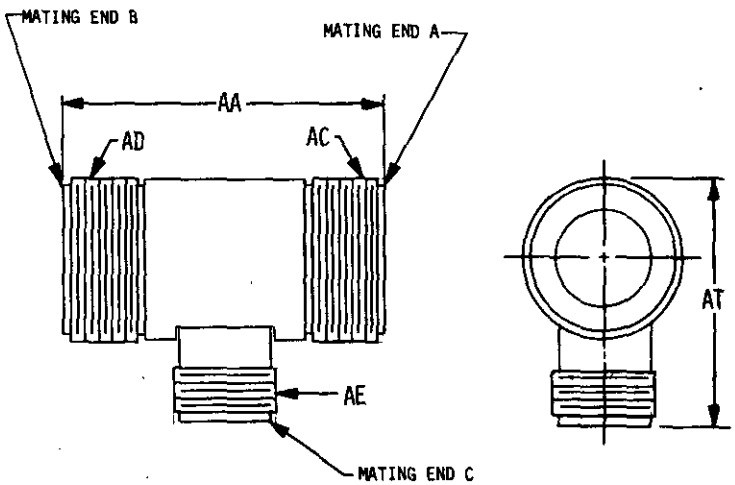


Ø76-Ø1-42

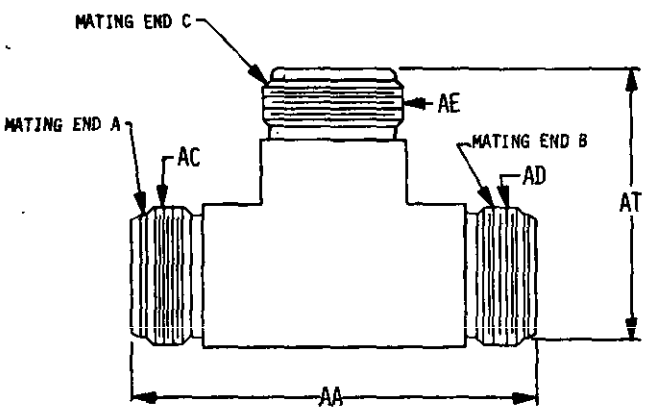


Ø76-Ø1-43

Source: https://assist.dla.mil -- Downloaded: 2026Ø1Ø-26T07:24Z
Check the source to verify that this is the current version before use.

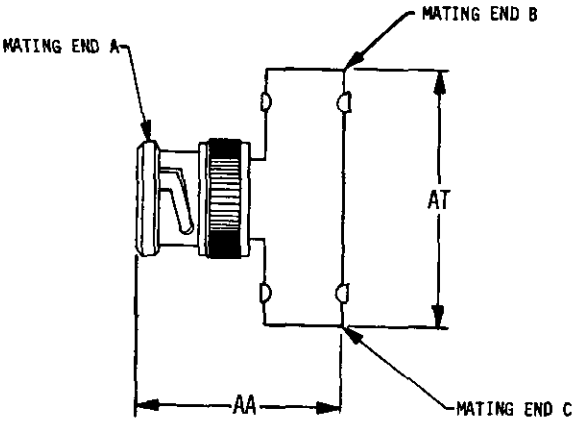


076-01-44

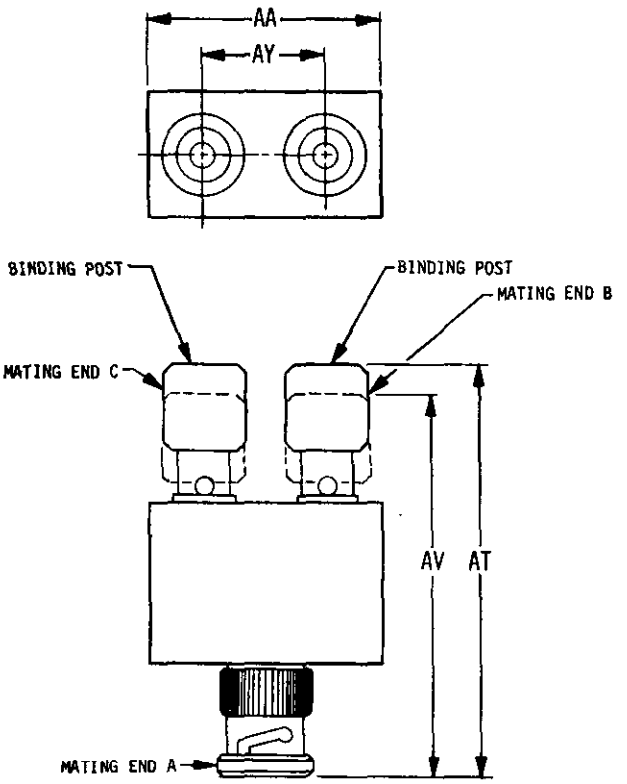


076-01-45

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

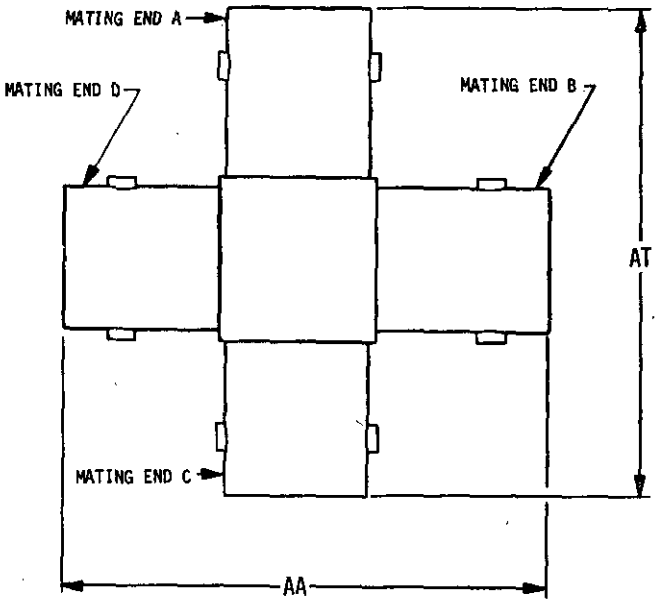


Ø76-Ø1-46

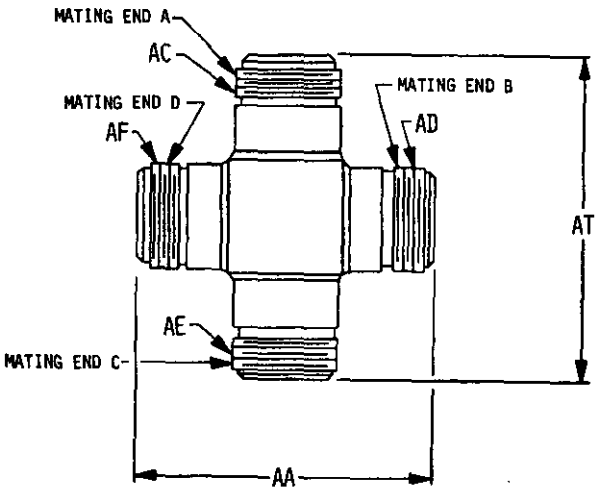


Ø76-Ø1-47


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

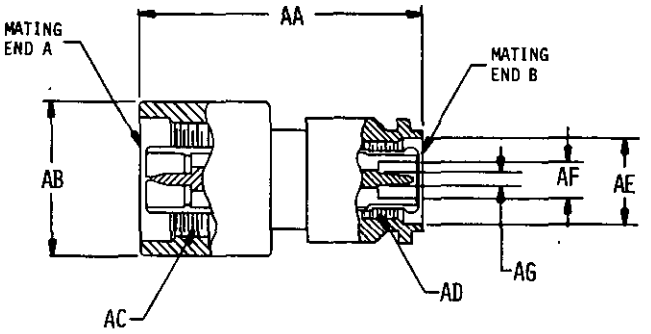

Ø76-Ø1-5Ø

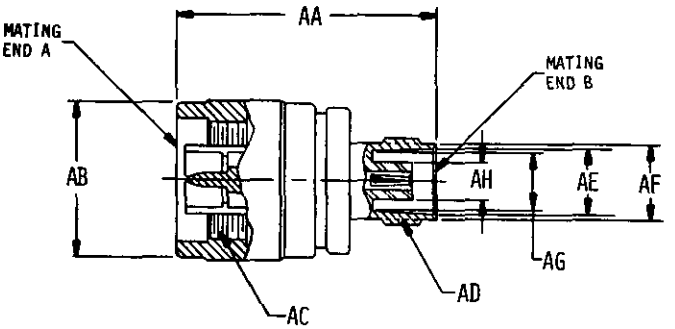


Ø76-Ø1-49

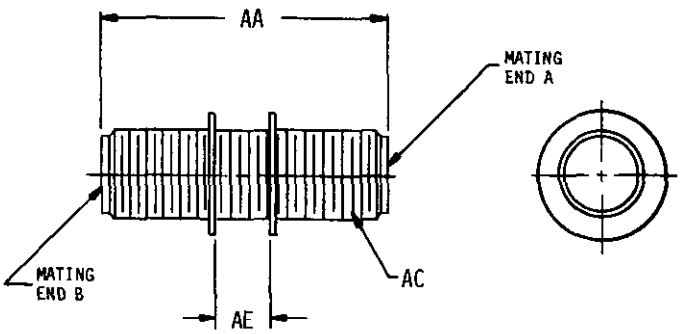


Ø76-Ø1-48

Source: https://assist.dla.mil -- Downloaded: 2026Ø1-26T07:24Z
Check the source to verify that this is the current version before use.

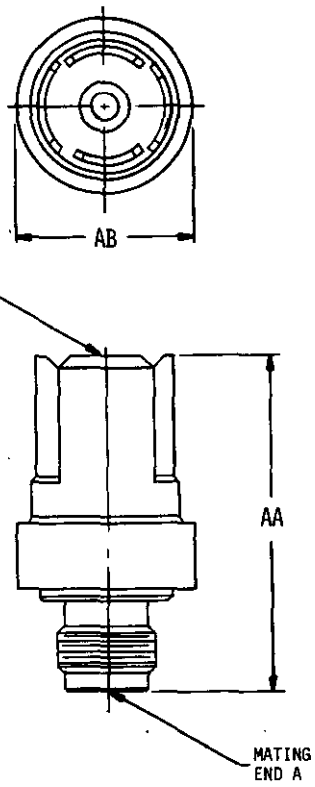



076-01-52

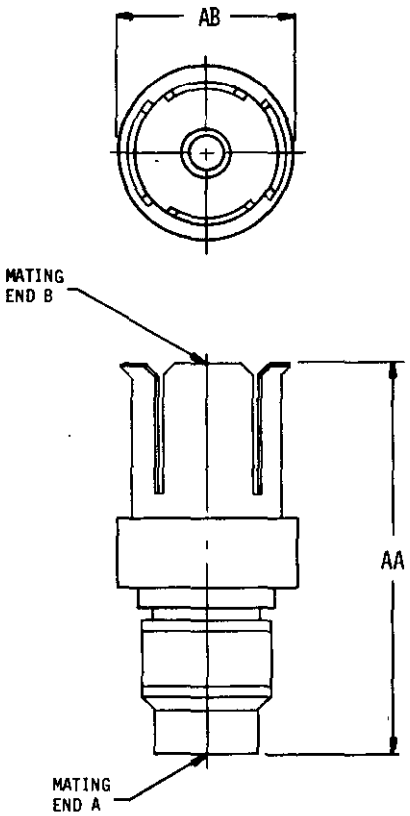


076-01-51


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.



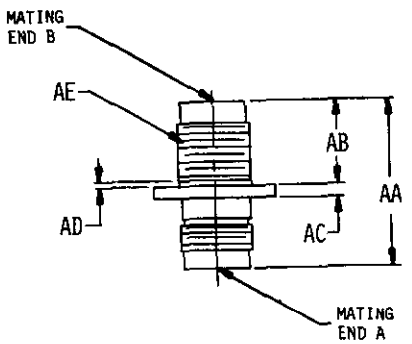


076-01-54

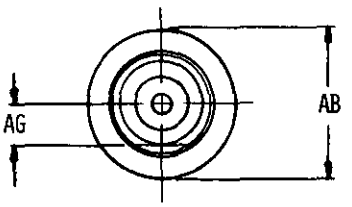

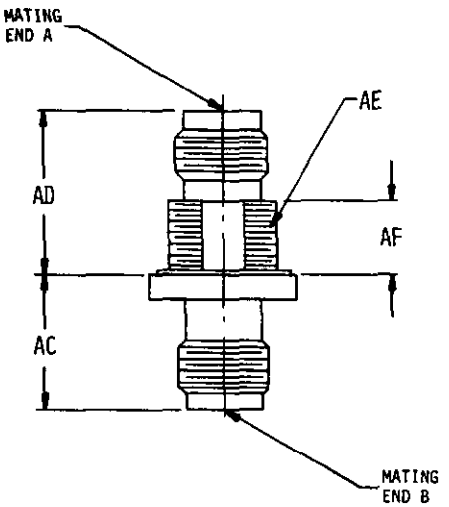


076-01-53

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

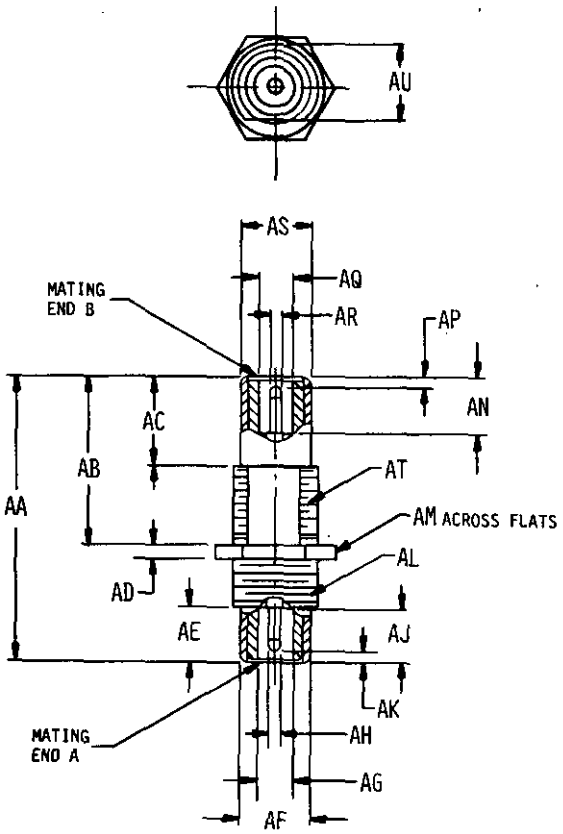


076-01-55

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

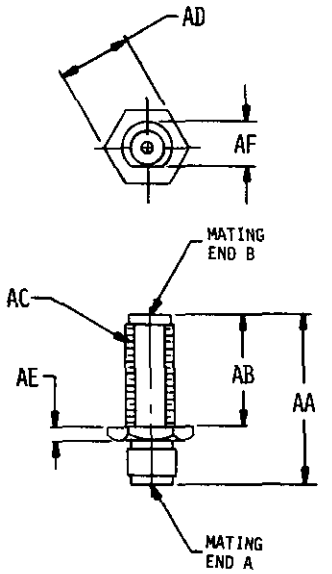


076-01-57

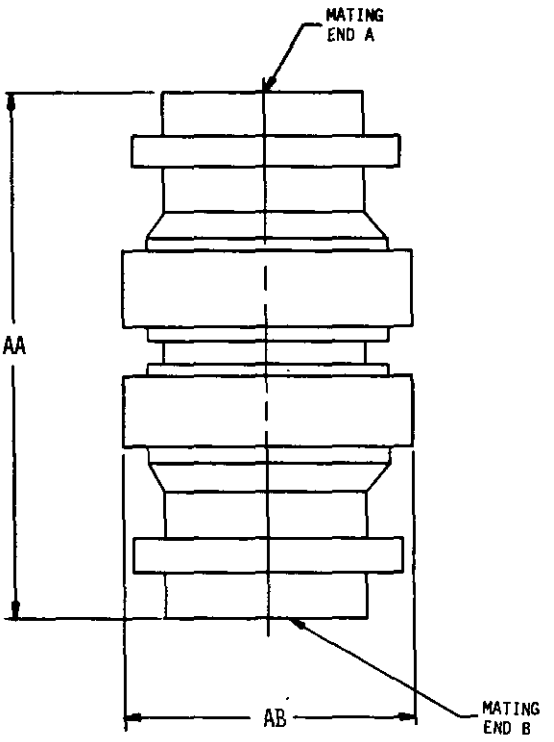


076-01-56

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

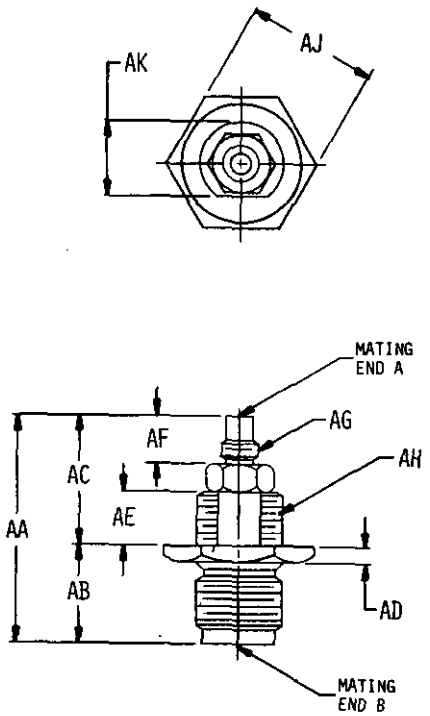


076-01-58

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

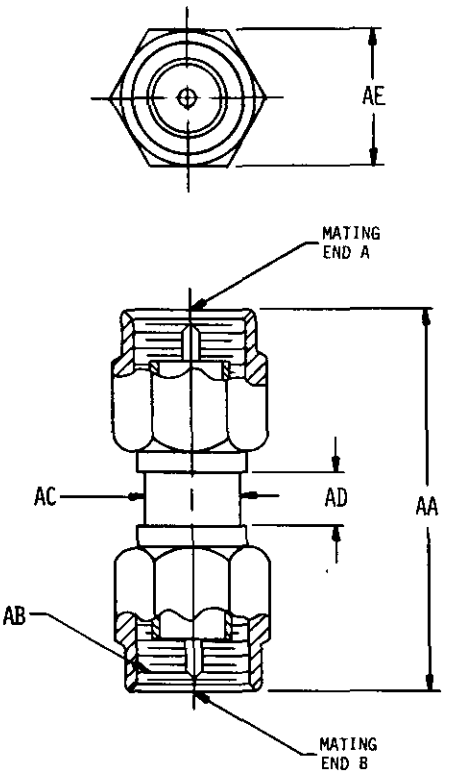


076-01-59

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

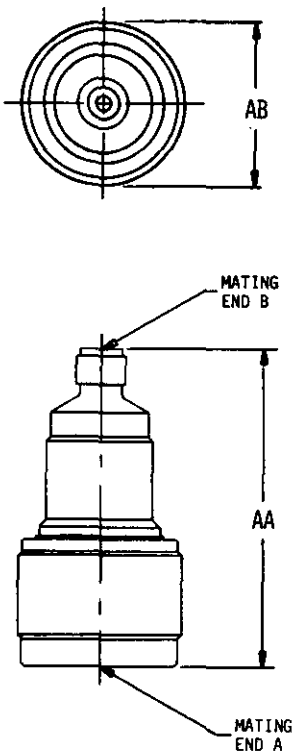


076-01-61

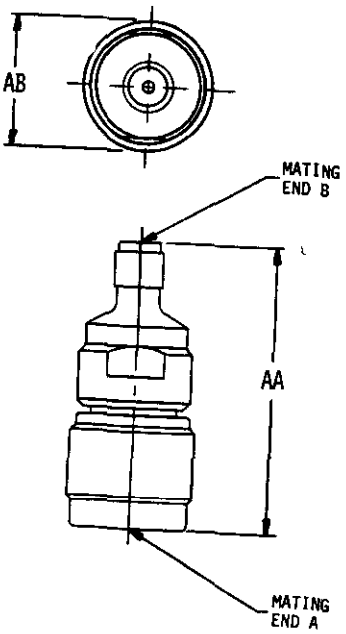


076-01-60

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

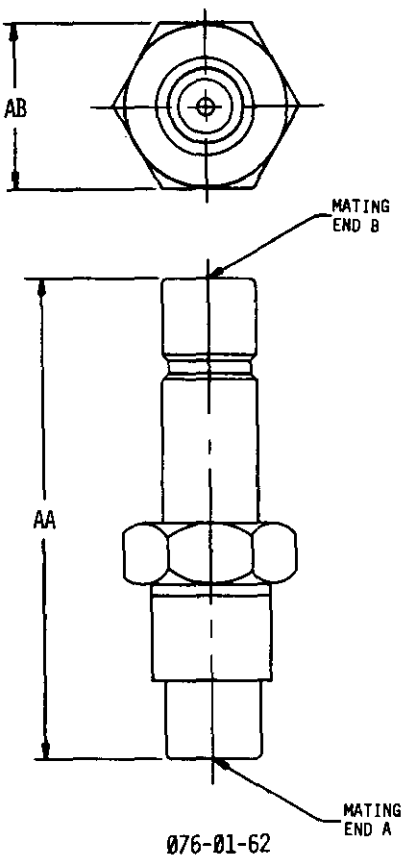


076-01-62

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

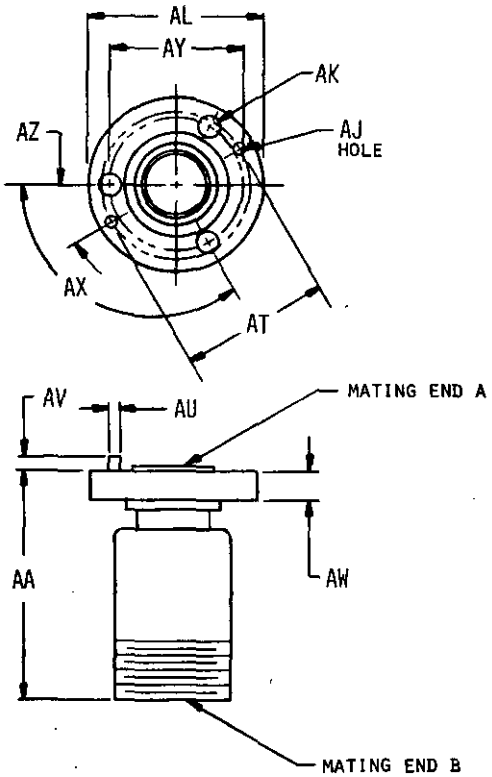


076-01-63

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

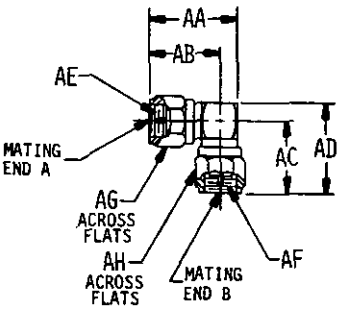

076-01-64

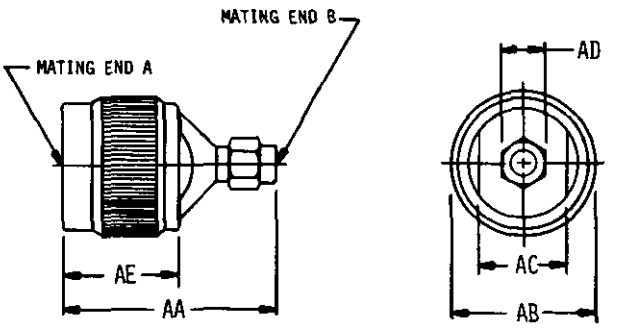

076-01-65

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	10	1579	16	1730	54	2007	58
0102	10	1580	16	1732	54	2008	58
0103	10	1582	16	1746	70	2010	59
0104	10	1583	16	1762	68	2011	59
0105	10	1584	16	1769	68	2012	59
0107	12	1585	16	1778	50	2013	59
0108	12	1586	16	1780	50	2014	59
0700	10	1587	16	1798	26	2015	59
0800	10	1588	16	1800	28	2016	59
1003	10	1590	16	1802	28	2017	59
1004	10	1592	16	1804	28	2018	59
1005	10	1593	14	1806	28	2019	59
1006	10	1594	14	1810	24	2020	61
1008	10	1595	20	1812	26	2021	61
1009	18	1598	42	1816	82	2022	61
1371	56	1606	42	1817	84	2023	61
1373	56	1612	62	1818	84	2024	61
1374	76	1618	62	1820	84	2025	61
1376	56	1620	62	1828	82	2026	61
1377	56	1624	32	1832	62	2027	59
1380	54	1630	30	1834	64	2028	59
1384	56	1632	30	1836	64	2029	59
1386	54	1634	32	1838	64	2030	59
1387	56	1638	46	1840	64	2031	59
1388	56	1646	44	1842	64	2032	59
1407	56	1660	36	1852	62	2033	59
1471	70	1662	36	1854	62	2034	59
1502	70	1664	36	1856	62	2035	59
1504	72	1668	34	1860	66	2036	59
1505	76	1670	34	1862	66	2037	61
1508	70	1674	34	1864	66	2038	61
1509	70	1676	34	1868	66	2039	61
1538	76	1678	34	1870	66	2040	61
1565	20	1682	32	1874	64	2041	61
1567	20	1684	32	1876	64	2042	61
1569	20	1688	30	1880	64	2043	61
1570	16	1690	30	1882	64	2044	59
1573	16	1696	28	1926	82	2045	59
1577	16	1704	30	2002	60	2046	59
1578	16	1712	28	2004	60	2047	59

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2048	59	2114	24	2188	84	2275	40
2049	59	2116	26	2200	22	2276	42
2050	59	2118	26	2202	24	2278	42
2051	59	2119	28	2204	24	2280	42
2052	59	2120	28	2206	24	2282	46
2053	59	2121	28	2208	24	2284	46
2054	61	2122	28	2210	26	2288	48
2055	61	2123	42	2212	26	2290	50
2056	61	2124	30	2214	26	2292	50
2057	61	2126	30	2215	24	2293	50
2058	61	2128	32	2216	26	2296	50
2059	61	2129	36	2218	26	2298	50
2060	61	2134	44	2220	28	2300	50
2061	59	2136	44	2222	26	2302	50
2062	59	2138	44	2224	26	2304	50
2063	59	2140	44	2226	26	2306	50
2064	59	2142	44	2228	26	2308	50
2065	59	2144	44	2230	28	2310	50
2066	59	2146	44	2232	30	2312	50
2067	59	2148	44	2234	30	2314	50
2068	59	2150	46	2236	30	2316	52
2069	59	2152	46	2238	30	2318	54
2070	59	2153	46	2242	32	2320	54
2071	61	2154	46	2244	32	2322	54
2072	61	2155	46	2246	32	2323	56
2073	61	2156	46	2250	30	2324	54
2074	61	2157	46	2251	34	2325	56
2075	61	2158	46	2252	34	2326	56
2076	61	2160	52	2254	34	2328	62
2077	51	2162	52	2256	34	2330	64
2078	61	2164	66	2258	34	2331	64
2079	61	2166	68	2260	36	2332	64
2080	61	2174	70	2262	36	2334	66
2081	61	2176	70	2264	38	2335	68
2100	22	2178	70	2266	38	2336	68
2102	22	2182	84	2268	38	2338	68
2104	22	2183	84	2269	38	2343	72
2108	24	2184	84	2270	40	2344	72
2110	24	2185	84	2272	40	2348	72
2112	24	2186	84	2274	40	2350	72

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2352	72	2432	82	2632	61	4682	76
2353	72	2434	74	2633	61	4685	72
2354	72	2435	74	2634	61	4686	72
2355	74	2436	74	2635	61	4703	70
2356	72	2437	74	2636	59	4715	74
2357	74	2438	74	2637	59	4717	42
2358	76	2439	74	2638	59	4726	74
2359	74	2543	59	2639	59	4765	68
2360	76	2600	59	2640	59	4766	68
2361	74	2601	59	2641	59	4770	68
2362	76	2602	59	2642	59	4772	68
2364	76	2603	59	2644	59	4775	68
2366	76	2604	59	2645	59	4782	66
2368	76	2605	59	2646	61	4788	48
2370	78	2606	59	2647	61	4791	48
2372	78	2607	59	2648	61	4795	48
2376	78	2608	59	2649	61	4798	48
2378	78	2609	59	2650	61	4799	48
2380	78	2610	61	2651	61	4805	48
2382	78	2611	61	2652	61	4809	52
2384	78	2612	61	2653	61	4811	52
2386	78	2613	61	2654	59	4812	52
2390	78	2614	61	2655	59	4814	52
2392	78	2615	61	2656	59	4815	48
2394	80	2616	61	2657	59	4819	52
2396	80	2617	61	2658	59	4820	52
2398	80	2618	59	2659	59	4822	52
2400	80	2619	59	2660	59	4825	52
2406	80	2620	59	2661	59	4849	38
2408	80	2621	59	2662	61	4854	40
2410	80	2622	59	2663	61	4855	40
2412	80	2623	59	2664	61	4856	40
2414	80	2624	59	2665	61	4861	40
2416	80	2625	59	2666	61	4870	40
2418	80	2626	59	2667	61	4874	40
2420	82	2627	59	2668	61	4875	40
2424	82	2628	61	2669	61	4878	66
2426	82	2629	61	2670	59	4884	38
2428	82	2630	61	2671	59	4885	38
2430	82	2631	61	4681	76	4894	36

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4897	42	7629	86				
4900	38	7630	86				
4902	38	8422	82				
4906	36						
4908	36						
4950	18						
5060	14						
5061	14						
5062	14						
5063	14						
5068	14						
5069	14						
5070	14						
5071	14						
6310	38						
6359	54						
6369	10						
6372	86						
6870	84						
6873	10						
6874	12						
6941	12						
6942	12						
6991	86						
6992	86						
6993	86						
6994	86						
6995	86						
7001	86						
7002	86						
7003	86						
7004	86						
7005	86						
7021	22						
7022	22						
7023	22						
7024	22						
7572	18						
7577	18						
7580	20						

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Additional Part Marking	86
Additional Requirements	86
Air Leakage (Seal)	22
Altitude Rating	14
Aperture Cards Required	12
Applicable Documents	88
Base Document	10
City, State, Zip	10
Classification	14
Company Name/Command	10
Configuration	18
Construction	20
Contact Resistance	30
Contact Retention	28
Contract Number/Office Symbol	10
Control, Source	10
Control, Specifications	12
Corona	24
Coupling Mechanism Retention Force	32
Coupling Proof Torque	34
Date	10
Definition of Hermetic Sealing	88
Design and Construction	20
Dielectric Withstanding Voltage at Barometric Pressure	36
Dielectric Withstanding Voltage at Sea Level	40
Durability	42
Electrical Ratings	16
Finishes	18
Force to Engage and Disengage	44
Format	10
Government Design Activity FSCM	10
Humidity	48
Illustrations	18
Immersion	52
Impedance Nominal (Ohms)	16
Insulation Resistance	54

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT

	Page
Magnetic Permeability	62
Materials	18
Mating Characteristics	58
Mating End Design	20
Metals	20
Mounting Hardware	84
Nomenclature	88
Notes	88
Packaging	88
Part Marking	86
Part Number	12
Part Number Cross Reference	88
Phone Number	10
Quality Assurance Provisions	88
Requester FSCM	10
Requester's Name	10
Revision AEDPS Document (Number)	12
RF High Potential Withstanding Voltage	62
RF Insertion Loss	64
RF Leakage	66
Salt Spray	66
Scope	12
Shock Drop	68
Shock, Specified Pulse	70
Source Table	12
Street/Building	10
Superseded Document	88
System Application	10
Tabulated Characteristics	18
Temperature Cycling	72
Temperature Rating	14
Units of Measure	12, 18
Vibration	76
Voltage Rating	16
Voltage Standing Wave Ratio (VSWR)	82
Weight	22
Workmanship	84

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-53A(MI), dated 02 February 1979 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-53A(MI), dated 02 February 1979 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander,
U.S. Army Missile R & D Command
ATTN: DRDMI-ESD
Redstone A rsenal, Alabama 35809

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.