DOD-STD-35-65A(MI)
15 December 1978
SUPERSEDING
MIL-STD-35-65(MI)
31 JANUARY 1974

MILITARY STANDARD

CONNECTORS, ELECTRICAL, CIRCULAR

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

FSC EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Connectors, Electrical, Circular
Automated Engineering
Document Preparation System

DOD-STD-35-65A(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-65A(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for electrical, circular connectors.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	7
	2.1	Issues of documents	7
	2.2	Other publications	8
	3.	DEFINITIONS	9
	4.	GENERAL REQUIREMENTS	11
	4.1	Introduction	11
	4.2	Specification Requirement Sheet (SRS)	11
	4.3	Configuration	11
	4.3.1	Dimensions	11
	4.3.2	Illustrations	11
	4.4	Units of measure	11
	5.	DETAILED REQUIREMENTS	13
	5.1	Introduction	13
	5.2	MSE Formats	13
	5.3	Referenced documents	13
	5.4	Test matrix	13
	5.5	Tabulation	14
	5.6	Keyword Code Index (KCI) and Standard Paragraphs	17
	5.6.1	Interrelationship of Codes	17
	5.6.2	Automatic MSE Data	17
	5.6.3	DOD-STD-35-Tables	17

TABLES

Table	I.	Title Index	2
	II.	Test matrix	14
	III.	Tabulation candidates	15

APPENDICES

Appendix	A.	Illustrations	196
	B.	Characteristic Code Index	231
		Index	239

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for electrical, circular connectors.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. It is recommended that MIL-STD-1353, Selection and Use of Electrical Connectors be reviewed prior to using this dash-numbered part book.

The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
CONNECTOR, ELECTRICAL, CIRCULAR, WATERPROOF	071001	MIL-C-22992	HEAVY DUTY
		MS17343	WALL MOUNTING
		MS17344	PLUG
		MS17345	PLUG, CABLE
		MS17346	BOX MOUNTING
		MS17347	JAM NUT
		MS17348	JAM NUT BOX
		MS90555	WALL MTG, L
		MS90556	PLUG, L
		MS90557	PLUG, CABLE, L
		MS90558	WALL MTG, L
CONNECTOR, ELECTRICAL, CIRCULAR, AN TYPE	071002	MIL-C-5015	THREADED
			CRIMP FRONT REL
		MS3400	WALL MOUNTING
		MS3401	CABLE RECPT
		MS3402	BOX MTG
		MS3404	JAM NUT
		MS3406	PLUG
		MS3408	PLUG, 90 DEGREE
		MS3409	PLUG, 45 DEGREE
		MS3412	WALL MTG
		MS3436	PLUG, UTILITY
		MS3441	PLUG, UTILITY
		MS3450	CRIMP REAR REL
			WALL MOUNTING
		MS3451	CABLE RECPT
		MS3452	BOX MTG
		MS3454	JAM NUT
		MS3456	PLUG
		MS3459	PLUG, SELF LCKG
		MS3100	SOLDER WALL MTG
		MS3101	PLUG CABLE
		MS3102	BOX MTG
		MS3103	RECPT POTTING
		MS3106	PLUG

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
CONNECTOR, ELECTRICAL, CIRCULAR, AN TYPE	071002 (CONT)	MIL-C-5015	THREADED SOLDER
		MS3107	PLUG QUICK DISC
		MS3108	PLUG, 90 DEGREE
		MS3142	BOX MOUNTING
		MS3143	SOLDER MTG
		MS3507	PLUG, UTILITY
		MS25183	PLUG, POTTING
CONNECTOR, ELECTRICAL, CIRCULAR	071003	MIL-C-12520	WATERPROOF
		MIL-C-24231	PRESSURE-PROOF
		MIL-C-83723	ENVIRONMENTAL
CONNECTOR, ELECTRICAL, CIRCULAR, MINIATURE QUICK DISCONNECT	071005	MIL-C-26482	BAYONET CPLG SOLDER
		MS3110	WALL MTG
		MS3111	PLUG CABLE
		MS3112	BOX MTG
		MS3113	SOLDER MTG
		MS3114	JAM NUT
		MS3115	DUMMY RECPT
		MS3116	PLUG
		MS3119	THRU-BULKHEAD
		MS3440	NARROW FLANGE
		MS3442	WIDE FLANGE
		MS3443	SOLDER FLANGE
		MS3449	SINGLE HOLE MTG CRIMP
		MS3470	NARROW FLANGE
		MS3471	CABLE RECPT
		MS3472	WIDE FLANGE
		MS3473	SOLDER MOUNTING
		MS3474	JAM NUT
		MS3475	PLUG, RFI
		MS3476	PLUG
		MS3477	BOX, SOLDERLESS
		MS3479	JAM NUT SOLDRLS CRIMP

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
CONNECTOR, ELECTRICAL, CIRCULAR, MINIATURE QUICK DISCONNECT	071005 (CONT)	MIL-C-27599	SOLDER CONTACT BAYONET CPLG ER
		MS20026	WALL MOUNTING
		MS20027	PLUG
		MS20028	LINE PLUG
		MS20029	JAM NUT
		MS27334	WALL MOUNTING
		MS27335	BOX MOUNTING
		MS27336	PLUG
		MS27337	JAM NUT
		MS27338	WALL MOUNTING
		MS27503	SOLDER MOUNT
		MIL-C-38999	HIGH DENSITY SCOOP-PROOF BAYONET CPLG
		MS27466	WALL MTG
		MS27467	PLUG
		MS27468	JAM NUT MTG
		MS27496	BOX MTG
		MS27498	PLUG 90 DEGREE
		MS27505	BOX MTG FLANGE
		MS27656	BACK PANEL WALL MTG FLANGE
		MS27661	PLUG, LANYARD
		MS27662	THRU-BULKHEAD SOLDER
		MS27469	WALL MTG FLANGE
		MS27470	JAM NUT MTG
		MS27471	SOLDER MTG
			LOW SILHOUETTE CRIMP
		MS27472	WALL MTG FLANGE
		MS27473	PLUG
		MS27474	JAM NUT MTG
		MS27484	PLUG
		MS27497	BACK PANEL WALL MTG FLANGE
		MS27499	BOX MTG FLANGE
		MS27508	BACK PANEL BOX MTG FLANGE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
CONNECTOR, ELECTRICAL, CIRCULAR, MINIATURE QUICK DISCONNECT	071005 (CONT)	MIL-C-38999	HIGH DENSITY LOW SILHOUETTE BAYONET CPLG
		MS27513	BOX MTG FLANGE SOLDER
		MS27475	WALL MTG FLANGE
		MS27476	BOX MTG
		MS27477	JAM NUT MTG
		MS27478	SOLDER MTG
		MS27664	BACK PANEL WALL MTG FLANGE
		MS27667	THRU-BULKHEAD
		MIL-C-50880	BAYONET CPLG ER
		MIL-C-81703	PUSH-PULL CPLG SOLDER CONTACT
		MS3130	WALL MTG FLANGE
		MS3132	BOX MTG FLANGE
		MS3134	JAM NUT
		MS3135	DUMMY STOWAGE
		MS3137	PLUG
		MS3138	PLUG LANYARD
		MS3139	THRU-BULKHEAD
		MS3463	SOLDER MTG
		MS3466	BOX MTG
		MS3469	JAM NUT MTG CRIMP
		MS3140	WALL MTG FLANGE
		MS3144	JAM NUT MTG
		MS3147	PLUG
		MS3148	PLUG LANYARD
		MS3445	RACK AND PANEL
		MS3145	BOX MTG
		MS3146	SOLDER MTG
		MS3149	SINGLE HOLE MTG
		MS3424	WALL MTG FLANGE
		MS3446	PLUG RACK/PANEL
		MS3464	JAM NUT
		MS3467	PLUG
		MS3468	PLUG LANYARD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
CONNECTOR, ELECTRICAL, CIRCULAR, UMBILICAL	071007	MIL-C-81582	
CONNECTOR SET, ELECTRICAL	071008	MIL-C-22249	
CONNECTOR SAVER, ELECTRICAL	071009	MIL-C-26482	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY -

MIL-S-8516	Seal Compound, Polysulfide Rubber, Electric Connectors and Electric Systems, Chemically Cured
MIL-S-23586	Sealing Compound, Electrical, Silicone Rubber, Accelerator Required
MIL-C-26482	Connector, Electrical, (Circular, Miniature, Quick Disconnect, Environment Resisting) Receptacles and Plugs, General Specification For
MIL-C-38999	Connector, Electrical, Circular, Miniature, High Density, Quick Disconnect, Environment Resistant Removable Crimp Contacts, General Specification For
MIL-A-46146	Adhesive Sealants, Silicone, RTV, Non-Corrosive (For Use with Sensitive Metals and Equipment)
MIL-C-83723	Connector, Electrical, (Circular, Environment Resisting), Receptacles and Plugs, General Specification For

STANDARDS

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-454	Standard General Requirements for Electronic Equipment

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

MIL-STD-810	Environmental Test Methods
MIL-STD-1285	Marking of Electric and Electronic Parts
MIL-STD-1344	Test Methods for Electrical Connectors
MIL-STD-1523	Age Control of Age-Sensitive Elastomeric Materials

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

EIARS359	Standard Colors for Color Identification and Coding
ASTME380	Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, Pa. 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Connectors, Electrical, Circular.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for Connectors, Electrical, Circular, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Connectors, Electrical, Circular.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Connectors, Electrical, Circular.

4.3.2 Illustrations. Illustrations applicable to Connectors, Electrical, Circular are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Test matrix. A test matrix is supplied as a guide for selecting documents to specify tests (see table II). The test matrix presents documents most applicable for use to satisfy the statement "TEST PER (DOC DES)". Any document listed in the Title Index may be used to satisfy the statement. However, the selected document from the Title Index must contain the desired test. Government test method documents and approved industry standards such as ASTM test methods may also be used to satisfy the statement "TEST PER (DOC DES)".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE II. TEST MATRIX.

DOCUMENT	CODE	TEST: Accessory Thread Strength	Chain Tensile Strength	Coupling Pin Strength	External Bending Moment	Pin Contact Stability	RFI Shielding	RFI Spring Finger Force	Shell to Shell Conductivity	Thermal Shock (Hermetics)	Water Pressure
		2213	2300	1790	2474	2712	1829	2770	2782	2902	1614
MIL-C-5015					X				X		X
MIL-C-12520											X
MIL-C-22992			X								X
MIL-C-26482		X	X	X	X	X	X	X	X		X
MIL-C-27599				X				X	X	X	X
MIL-C-38999		X		X	X	X	X	X	X	X	
MIL-C-50880				X				X	X	X	
MIL-C-81582			X		X	X	X	X	X		
MIL-C-83723		X		X	X	X	X	X	X	X	

5.5 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table III provides codes for column headings which may be used for circular connector characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1562	INSERT ARR DOCUMENT	1563	INSERT ARR MS NUMBER	2100	INSERT ARR ILL. NO.
2102	CONTACT TYPE	2104	CONTACT ILL. NO.	2106	TERM. TYPE
2108	POLARIZATION POS.	2110	BACKSHELL	2130	SHELL SIZE
2148	NUMBER OF CONTACTS	2202	MATING CONNECTOR PART NO.	7021	MAXIMUM WEIGHT GRAMS
7022	MAXIMUM WEIGHT OUNCES	7023	MAXIMUM WEIGHT POUNDS	7024	MAXIMUM WEIGHT KILOGRAMS
2120	BASE DOC TYPE	2122	BASE DOC SERIES	2124	BASE DOC CLASS
2126	BASE DOC PLZN	2128	BASE DOC STYLE	1570	MS CONTACT
2132	BASE DOC SERVICE RATING				

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

5.6 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.6.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.6.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.6.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT	0700
ONE SECTION DOCUMENT	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6874	THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).
0107	
0108	0108. SCOPE. SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.
	PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.
	PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.
6941	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.
6942	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ALTITUDE RATING	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5060
SEA LEVEL TO (METERS)	5061
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5062
SEA LEVEL TO (METERS)	5063
TEMPERATURE RATING	
MAXIMUM OPERATING (DEGREES CELSIUS)	5069
MAXIMUM NONOPERATING (DEGREES CELSIUS)	5071
MAXIMUM STORAGE (DEGREES CELSIUS)	7302
MAXIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5054
MINIMUM OPERATING (DEGREES CELSIUS)	5068
MINIMUM NONOPERATING (DEGREES CELSIUS)	5070
MINIMUM STORAGE (DEGREES CELSIUS)	7301

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ALTITUDE RATING.
5060	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5060 FEET.
5061	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5061 METERS.
5062	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5062 FEET.
5063	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5063 METERS.
	TEMPERATURE RATING.
5069	THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS.
5071	THE MAXIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5071 DEGREES CELSIUS.
7302	THE MAXIMUM STORAGE TEMPERATURE RATING SHALL BE 7302 DEGREES CELSIUS.
5054	THE MAXIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5054 DEGREES CELSIUS.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.
5070	THE MINIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5070 DEGREES CELSIUS.
7301	THE MINIMUM STORAGE TEMPERATURE RATING SHALL BE 7301 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE RATING (CONT)	
MINIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5052
RATED WORKING VOLTAGE	
SEA LEVEL	
(VOLTS AC)	2151
(VOLTS DC)	2153
(VOLTS DC OR RMS)	2155
ALTITUDE	
VOLTAGE	
(VOLTS AC)	2157
(VOLTS DC)	2159
(VOLTS DC OR RMS)	2161
ALTITUDE (SELECT ONE)	
(FEET)	2163
(METERS)	2165

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
5052	THE MINIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5052 DEGREES CELSIUS.
	RATED WORKING VOLTAGE.
2151	THE MAXIMUM RATED WORKING VOLTAGE AT SEA LEVEL SHALL BE 2151 VOLTS AC.
2153	THE MAXIMUM RATED WORKING VOLTAGE AT SEA LEVEL SHALL BE 2153 VOLTS DC.
2155	THE MAXIMUM RATED WORKING VOLTAGE AT SEA LEVEL SHALL BE 2155 VOLTS DC OR RMS.
2157	THE MAXIMUM RATED WORKING VOLTAGE AT ALTITUDE SHALL BE 2157 VOLTS AC.
2159	THE MAXIMUM RATED WORKING VOLTAGE AT ALTITUDE SHALL BE 2159 VOLTS DC.
2161	THE MAXIMUM RATED WORKING VOLTAGE AT ALTITUDE SHALL BE 2161 VOLTS DC OR RMS.
2163	THE REDUCED RATED WORKING VOLTAGE ALTITUDE SHALL BE 2163 FEET.
2165	THE REDUCED RATED WORKING VOLTAGE ALTITUDE SHALL BE 2165 METERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI).

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION	
IN ACCORDANCE WITH BASE DOCUMENT	
TYPE (DESIGNATION)	2120
SERIES (DESIGNATION)	2122
CLASS (DESIGNATION)	2124
POLARIZATION (DESIGNATION)	2126
STYLE (DESIGNATION)	2128
SHELL SIZE (DESIGNATION)	2130
SERVICE RATING (DESIGNATION)	2132
CONTACT DESIGNATOR (DESIGNATION)	2134

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH CLASSIFICATION.
2120	TYPE 2120 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
2122	SERIES 2122 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
2124	CLASS 2124 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
2126	POLARIZATION 2126 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
2128	STYLE 2128 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
2130	SHELL SIZE 2130 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
2132	SERVICE RATING 2132 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
2134	CONTACT DESIGNATOR 2134 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT CURRENT RATING	
MAXIMUM (AMPERES)	2136
NOMINAL (AMPERES)	2138
COUPLING METHOD	
WRITE-IN ____	2140
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
*UNITS (SELECT ONE)	
U.S. (SELECT ONE)	
INCHES.	7572
FEET.	7573
YARDS.	7574
SI (SELECT ONE)	
CENTIMETERS.	7576
MILLIMETERS.	7577
METERS.	7578

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CONTACT CURRENT RATING.
2136	THE MAXIMUM CONTACT CURRENT RATING SHALL BE 2136 AMPERE(S).
2138	THE NOMINAL CONTACT CURRENT RATING SHALL BE 2138 AMPERE(S).
2140	COUPLING METHOD. THE COUPLING METHOD SHALL BE 2140.
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7573	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN FEET OR DEGREES.
7574	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN YARDS OR DEGREES.
7576	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN CENTIMETERS OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
7578	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN METERS OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950
NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.	
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	
MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE IX IS USED.	
METALS	
DISSIMILAR METALS.	7580

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.
	MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
	FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
7580	METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION	
INSERT	
ARRANGEMENT (SELECT ONE)	
(DOC DES)	1562
ILLUSTRATION (NUMBER)	2100
MS (NUMBER)	1563
ONE-PIECE CONSTRUCTION.	2142
CLOSED ENTRY.	2144
CONTACT HOLE (DOC DES)	2146
CONTACTS (QUANTITY)	2148

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	DESIGN AND CONSTRUCTION.
	INSERT.
1562	THE INSERT ARRANGEMENT FOR THE CONNECTOR SHALL BE IN ACCORDANCE WITH 1562.
2100	THE INSERT ARRANGEMENT FOR THE CONNECTOR SHALL BE IN ACCORDANCE WITH ILLUSTRATION 2100.
1563	THE INSERT ARRANGEMENT FOR THE CONNECTOR SHALL BE IN ACCORDANCE WITH MS NUMBER 1563.
2142	THE INSERT SHALL BE OF ONE-PIECE CONSTRUCTION. SPLIT OR HOLLOW INSERTS GLUED OR BONDED TOGETHER SHALL NOT BE USED.
2144	THE INSERT SHALL BE CLOSED ENTRY DESIGN.
2146	THE CONTACT HOLE SHALL BE IN ACCORDANCE WITH 2146.
2148	THERE SHALL BE 2148 CONTACT POSITIONS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
CONTACTS	
TYPE	
(TYPE) PIN, SOCKET, COAXIAL MALE, COAXIAL FEMALE	2102
SIZES	
(SEE CONTACT SIZES TABLE)	
CONTACT CONFIGURATION	
(DOC DES) INCLUDE DETAIL SHEET IF APPLICABLE	1568
(MS NUMBER)	1570
(ILLUSTRATION NUMBER)	2104
(VENDOR PART NUMBER)	1572
*(VENDOR FSCM)	1571
SUPPLY WITHOUT CONTACTS.	2150

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2102 CONTACT TYPE. THE CONTACTS SHALL BE 2102.

CONTACT SIZES. CONTACT SIZES SHALL BE IN ACCORDANCE WITH THE CONTACT SIZES TABLE.

CONTACT SIZES TABLE

SIZE	CONTACT IDENTIFIER
3250	3251
3252	3253
3254	3255
3256	3257
3258	3259
3260	3261

CONTACT CONFIGURATION.

1568 THE CONTACT CONFIGURATION SHALL BE IN ACCORDANCE WITH 1568.

1570 THE CONTACT CONFIGURATION SHALL BE IN ACCORDANCE WITH MS NUMBER 1570.

2104 THE CONTACT CONFIGURATION SHALL BE IN ACCORDANCE WITH ILLUSTRATION 2104.

1572 CONTACT PART NUMBER(S) 1572 FROM FSCM 1571 SHALL APPLY.
1571

2150 CONNECTORS SHALL BE SUPPLIED WITHOUT CONTACTS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
CONTACT CONFIGURATION (CONT)	
WIRE SIZE (SELECT ONE)	
AWG (NUMBER)	2152
DIAMETER (MILLIMETERS)	2154
COMMONING CLIPS	
COMMON CONTACTS (DESIGNATIONS)	3403
TERMINATION	
CRIMP, SOLDER, WRAP POST (TYPE)	2106
IDENTIFICATION (SELECT ONE)	
ALPHABETIC.	1591
NUMERIC.	1592
ALPHABETIC OR NUMERIC.	2156
INSERTION (SELECT ONE)	
FRONT.	3400
REAR.	3401
REMOVAL (SELECT ONE)	
FRONT.	3405
REAR.	3407

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2152	CONTACTS SHALL ACCOMMODATE AWG SIZE 2152 WIRE.
2154	CONTACTS SHALL ACCOMMODATE 2154 MILLIMETER DIAMETER WIRE.
	CONTACT COMMONING CLIPS.
3403	COMMONING CLIPS SHALL BE USED TO COMMON CONTACTS 3403.
	CONTACT TERMINATION.
2106	THE CONTACT TERMINATION SHALL BE 2106 TYPE.
	CONTACT IDENTIFICATION.
1591	ALPHABETIC CHARACTERS SHALL BE USED TO IDENTIFY THE CONTACT POSITIONS IN THE INSERT.
1592	NUMERIC CHARACTERS SHALL BE USED TO IDENTIFY THE CONTACT POSITIONS IN THE INSERT.
2156	ALPHABETIC OR NUMERIC CHARACTERS SHALL BE USED TO IDENTIFY THE CONTACTS IN THE INSERTS.
	CONTACT INSERTION.
3400	CONTACT INSERTION SHALL BE FROM THE FRONT OF THE INSERT.
3401	CONTACT INSERTION SHALL FROM THE REAR OF THE INSERT.
	CONTACT REMOVAL.
3405	CONTACT REMOVAL SHALL BE FROM THE FRONT OF THE INSERT.
3407	CONTACT REMOVAL SHALL BE FROM THE REAR OF THE INSERT.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
TOOLS	
INSERTION TOOL (PART NUMBER)	2160
REMOVAL TOOL (PART NUMBER)	2162
CRIMP TOOL (PART NUMBER)	3408
INSERTION AND REMOVAL TOOLS SUPPLIED.	2158
POLARIZATION	
AS FOLLOWS:	
POLARIZATION ____	2164
POSITION (DESIGNATION)	2108
COUPLING ASSURANCE	
STRIPES ALINE.	1604
COUPLING PINS CONTRASTING COLOR.	2166
COUPLING RING WITH HOLES FOR VISIBILITY OF COUPLING PINS ENDS.	1603

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

INSERTION AND REMOVAL TOOLS.

2160 THE CONTACT INSERTION TOOL PART NUMBER(S) SHALL BE 2160.

2162 THE CONTACT REMOVAL TOOL PART NUMBER(S) SHALL BE 2162.

3408 CRIMPING TOOL PART NUMBER(S) SHALL BE 3408.

2158 CONTACT INSERTION AND REMOVAL TOOL(S) SHALL BE SUPPLIED WITH EACH CONNECTOR.

POLARIZATION.

2164 POLARIZATION SHALL BE 2164.

2108 THE INSERT POSITION (CLOCKING) WITH RESPECT TO THE MASTER KEYWAY SHALL BE IDENTIFIED AS POSITION 2108.

COUPLING ASSURANCE.

1604 THREE AXIAL STRIPES SHALL BE PLACED ON THE PLUG SHELL WHICH WILL ALINE WITH THREE CORRESPONDING STRIPES ON THE COUPLING RING WHEN COMPLETELY COUPLED.

2166 COUPLING PINS ON THE RECEPTACLE SHALL HAVE END SURFACES OF CONTRASTING COLOR TO THE COUPLING RING OF THE MATING CONNECTOR.

1603 THE ENDS OF THE COUPLING PINS SHALL BE VISIBLE THROUGH SUITABLE HOLES IN THE COUPLING RING WHEN THE CONNECTORS ARE FULLY ENGAGED AND THE COUPLING RING IS IN LOCKED POSITION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
COUPLING ASSURANCE (CONT)	
FULL-COLOR BAND.	1602
VISIBLE MEANS.	2170
COUPLING AUDIBLE CLICK.	2172
UNCOUPLING AUDIBLE CLICK.	2174
BACKSHELL ACCESSORIES	
(NAME)	2110
(PART NUMBER)	2176
(VENDOR FSCM)	2178
PROTECTIVE COVER (CAP)	
(PART NUMBER)	3410
GROMMET (WIRE SEAL) (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2180

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1602	A VISUAL FULL-COLOR BAND SHALL BE PROVIDED TO INDICATE COMPLETE COUPLING.
2170	VISUAL MEANS OF INDICATING COMPLETE COUPLING SHALL BE PROVIDED.
2172	THERE SHALL BE AN AUDIBLE CLICK WHEN POSITIVE COUPLING DETENT IS ACCOMPLISHED.
2174	THERE SHALL BE AN AUDIBLE CLICK WHEN POSITIVE UNCOUPLING DETENT IS ACCOMPLISHED.
2110	BACKSHELL ACCESSORIES. THE CONNECTOR SHALL INCLUDE 2110.
2176	THE PART NUMBER FOR THE ACCESSORY SHALL BE 2176.
2178	THE ACCESSORY VENDOR FSCM SHALL BE 2178.
3410	PROTECTIVE COVER (CAP). PROTECTIVE COVER (CAP) PART NUMBER(S) SHALL BE 3410.
2180	GROMMET (WIRE SEAL). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2180.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
GROMMET (WIRE SEAL) (CONT)	
AS FOLLOWS:	2182
MAXIMUM OUTSIDE DIAMETER (SELECT ONE)	
(INCH)	2184
(MILLIMETERS)	2186
MINIMUM OUTSIDE DIAMETER (SELECT ONE)	
(INCH)	2188
(MILLIMETERS)	2190
GROMMET SEALING PLUGS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2192
PER DOCUMENT (DOC DES)	2194
VENDOR (PART NUMBER)	2195
VENDOR (FSCM)	2196

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2182	GROMMET (WIRE SEAL). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2184	THE GROMMET SHALL BE DESIGNED TO ACCOMMODATE A WIRE SIZE NOT GREATER THAN 2184 INCH OUTSIDE DIAMETER.
2186	THE GROMMET SHALL BE DESIGNED TO ACCOMMODATE A WIRE SIZE NOT GREATER THAN 2186 MILLIMETER(S) OUTSIDE DIAMETER.
2188	THE GROMMET SHALL BE DESIGNED TO PROVIDE SEALING ON A WIRE SIZE NOT LESS THAN 2188 INCH OUTSIDE DIAMETER.
2190	THE GROMMET SHALL BE DESIGNED TO PROVIDE SEALING ON A WIRE SIZE NOT LESS THAN 2190 MILLIMETER(S) OUTSIDE DIAMETER.
2192	GROMMET SEALING PLUGS. GROMMET SEALING PLUGS SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2192.
2194	GROMMET SEALING PLUGS. GROMMET SEALING PLUGS SHALL BE IN ACCORDANCE WITH 2194.
2195	GROMMET SEALING PLUGS. GROMMET SEALING PLUGS, PART NUMBER 2195 SHALL BE SUPPLIED.
2196	GROMMET SEALING PLUGS SHALL BE FROM FSCM 2196.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
GROMMET SEALING PLUGS (CONT)	
QUANTITY SUPPLIED (SELECT ONE)	
(PERCENT)	2197
NONE.	2198
LUBRICATION	
COMPONENT LUBRICATED (NAME)	1600
LUBRICANT (DOC DES)	1601
MATING CONNECTOR	
(DOC DES)	2200
(PART NUMBER)	2202
(VENDOR FSCM)	2204
SEAL AND SEALING	
INTERFACIAL SEAL REQUIRED.	2206
PLUG STATIC SEAL.	2208
FILLED REAR CAVITY.	2210

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2197	2197 PERCENT OF THE NUMBER OF CONTACTS, BUT NOT LESS THAN 1, SHALL BE INCLUDED IN THE UNIT PACKAGE.
2198	CONNECTORS MAY BE SUPPLIED WITHOUT GROMMET SEALING PLUGS.
1600	LUBRICATION. THE 1600 OF THE CONNECTOR SHALL BE LUBRICATED.
1601	LUBRICANT IN ACCORDANCE WITH 1601 SHALL BE USED.
	MATING CONNECTOR.
2200	THE MATING CONNECTOR SHALL BE IN ACCORDANCE WITH 2200.
2202	THE MATING CONNECTOR PART NUMBER SHALL BE 2202.
2204	THE MATING CONNECTOR VENDOR FSCM SHALL BE 2204.
	SEAL AND SEALING.
2206	THE CONNECTOR INSERT SHALL CONTAIN AN INTERFACIAL SEAL.
2208	CONNECTOR SHELLS WITH COUPLING RINGS SHALL BE PROVIDED WITH A STATIC PERIPHEAL SEAL.
2210	THE CAVITY AT THE REAR OF THE CONNECTOR BETWEEN THE INSERT AND THE SHELL SHALL BE FILLED WITH RTV SILICONE CONFORMING TO MIL-A-46146, OR EQUIVALENT.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currenversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
POTTING	
ACCEPT.	2212
SAFETY WIRING	
PROVIDE FOR.	2214
RFI SPRING FINGERS	
LOCATION.	2216
QUANTITY (SELECT ONE)	
(FINGERS PER INCH)	2218
(FINGERS PER 25.4 MILLIMETERS)	2220
ENGAGEMENT (SELECT ONE)	
MINIMUM PRIOR TO CONTACT ENGAGEMENT (SELECT ONE)	
(INCHES)	2222
(MILLIMETERS)	2224
AFTER CONTACT ENGAGEMENT.	2226

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2212	POTTING. INSERTS AND SHELLS SHALL ACCEPT AND BOND TO MIL-S-8516 OR MIL-S-23586 POTTING MATERIAL WITHOUT TREATMENT BY THE USER.
2214	SAFETY WIRING. ALL THREADED COUPLING RINGS SHALL BE DESIGNED FOR SAFETY WIRING.
2216	RFI SPRING FINGERS. RFI SPRING FINGERS SHALL BE DESIGNED TO MAKE ELECTRICAL CONTACT WITH THE MATING SHELL WITHOUT INTERFERING WITH PROPER ENGAGEMENT. THE SPRINGS SHALL BE RETAINED ABOUT THE SHELL PERIPHERY.
2218	THERE SHALL BE NOT LESS THAN 2218 FINGERS PER INCH.
2220	THERE SHALL BE NOT LESS THAN 2220 FINGERS PER 25.4 MILLIMETERS.
2222	ENGAGEMENT SHALL BE NOT LESS THAN 2222 INCH(S) PRIOR TO CONTACT ENGAGEMENT.
2224	ENGAGEMENT SHALL BE NOT LESS THAN 2224 MILLIMETER(S) PRIOR TO CONTACT ENGAGEMENT.
2226	ENGAGEMENT SHALL BE AFTER CONTACT ENGAGEMENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
HYDROLYTIC STABILITY	
REQUIREMENT 47 OF MIL-STD-454.	2228
REAR RELEASE INDICATOR	
BLUE BAND.	2230
SCREW THREADS	
PER DOCUMENT (DOC DES)	2232
ALTITUDE	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	6790
SEA LEVEL TO (METERS)	6791
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	6792
SEA LEVEL TO (METERS)	6793

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2228	HYDROLYTIC STABILITY. ALL NONMETALLIC MATERIAL SHALL MEET THE HYDROLYTIC REVERSION RESISTANCE REQUIREMENT 47 OF MIL-STD-454.
2230	REAR RELEASE INDICATOR. CONNECTORS SHALL HAVE A BLUE COLOR BAND IN ACCORDANCE WITH EIA RS-359, INDICATING A REAR RELEASE CONTACT RETENTION SYSTEM.
2232	SCREW THREADS. SCREW THREADS SHALL BE IN ACCORDANCE WITH 2232. THREADS SHALL BE CHECKED USING RING OR PLUG GAGES. SLIGHT OUT-OF-ROUNDNESS BEYOND THE SPECIFIED TOLERANCES IS ACCEPTABLE IF THREADS ACCEPT THE GAGES WITHOUT FORCING.
6790	OPERATING ALTITUDE. THE OPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6790 FEET.
6791	OPERATING ALTITUDE. THE OPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6791 METERS.
6792	NONOPERATING ALTITUDE. THE NONOPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6792 FEET.
6793	NONOPERATING ALTITUDE. THE NONOPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6793 METERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
TEMPERATURE	
MAXIMUM OPERATING (DEGREES CELSIUS)	6794
MAXIMUM NONOPERATING (DEGREES CELSIUS)	6795
MAXIMUM STORAGE (DEGREES CELSIUS)	6796
MAXIMUM AMBIENT OPERATING (DEGREES CELSIUS)	6798
MINIMUM OPERATING (DEGREES CELSIUS)	6799
MINIMUM STORAGE (DEGREES CELSIUS)	6801
MINIMUM AMBIENT OPERATING (DEGREES CELSIUS)	6803
WEIGHT	
MAXIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6794	MAXIMUM OPERATING TEMPERATURE. THE OPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6794 DEGREES CELSIUS.
6795	MAXIMUM NONOPERATING TEMPERATURE. THE NONOPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6795 DEGREES CELSIUS.
6796	MAXIMUM STORAGE TEMPERATURE. THE STORAGE TEMPERATURE SHALL BE NOT GREATER THAN 6796 DEGREES CELSIUS.
6798	MAXIMUM AMBIENT OPERATING TEMPERATURE. THE AMBIENT OPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6798 DEGREES CELSIUS.
6799	MINIMUM OPERATING TEMPERATURE. THE OPERATING TEMPERATURE SHALL BE NOT LESS THAN 6799 DEGREES CELSIUS.
6801	MINIMUM STORAGE TEMPERATURE. THE STORAGE TEMPERATURE SHALL BE NOT LESS THAN 6801 DEGREES CELSIUS.
6803	MINIMUM AMBIENT OPERATING TEMPERATURE. THE AMBIENT OPERATING TEMPERATURE SHALL BE NOT LESS THAN 6803 DEGREES CELSIUS.
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7023	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
MAXIMUM WEIGHT PER UNIT (CONT)	
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024
ACCESSORY THREAD STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2207
NO EVIDENCE OF PHYSICAL DAMAGE.	2209
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2211
PER DOCUMENT (DOC DES)	2213
APPLIED TORQUE (SELECT ONE)	
(POUND-INCHES)	2215
(NEWTON METERS)	2217

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7021	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).
2207	ACCESSORY THREAD STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2207.
2209	ACCESSORY THREAD STRENGTH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2211	ACCESSORY THREAD STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2211.
2213	ACCESSORY THREAD STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2213.
2215	THE APPLIED TORQUE SHALL BE NOT LESS THAN 2215 POUND-INCH(S).
2217	THE APPLIED TORQUE SHALL BE NOT LESS THAN 2217 NEWTON METER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCESSORY THREAD STRENGTH (CONT)	
PER DOCUMENT (CONT)	
APPROXIMATE TORQUE RATE (SELECT ONE)	
(POUNDS PER SECOND)	2219
(NEWTONS PER SECOND)	2221
DURATION OF LOAD (MINUTES)	2223
ACCELERATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6272
NO EVIDENCE OF PHYSICAL DAMAGE.	6273
NO UNINTENDED SEPARATION.	2225
MEET MATING AND UNMATING REQUIREMENTS.	2227
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY.	7345
MAXIMUM DISCONTINUITY (MILLISECONDS)	2229
MAXIMUM DISCONTINUITY (MICROSECONDS)	2231

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2219	THE RATE OF TORQUE APPLICATION SHALL BE APPROXIMATELY 2219 POUND(S) PER SECOND UNTIL REQUIRED TORQUE IS REACHED.
2221	THE RATE OF TORQUE APPLICATION SHALL BE APPROXIMATELY 2221 NEWTON(S) PER SECOND UNTIL REQUIRED TORQUE IS REACHED.
2223	DURATION OF TORQUE LOAD SHALL BE NOT LESS THAN 2223 MINUTE(S).
6272	ACCELERATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6272.
6273	ACCELERATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2225	THERE SHALL BE NO UNINTENDED SEPARATION OF MATED CONNECTORS.
2227	CONNECTOR SHALL REMAIN WITHIN SPECIFIED MATING AND UNMATING FORCE REQUIREMENTS.
7345	THERE SHALL BE NO ELECTRICAL DISCONTINUITY DURING THE TEST.
2229	THE DISCONTINUITY DURING TEST SHALL BE NOT GREATER THAN 2229 MILLISECOND(S).
2231	THE DISCONTINUITY DURING TEST SHALL BE NOT GREATER THAN 2231 MICROSECOND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATION (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6250
PER MIL-STD-1344, METHOD 2011.	2233
*TEST CONDITION (LETTER)	2234
MOUNTING (SELECT ONE)	
MOUNT PER DOCUMENT (DOC DES)	6265
MOUNT BY NORMAL METHOD.	6264
MOUNT BY ANY SUITABLE METHOD.	6263
TEST SPECIMEN (SELECT ONE)	
MATED PLUG AND RECEPTABLE.	2236
UNMATED CONNECTOR.	2238
AIR LEAKAGE (SEAL)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2240
NO BUBBLES INDICATIVE OF LEAKAGE.	2242
MAXIMUM LEAKAGE RATE (STANDARD ATM CC/SEC)	2244

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6250	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6250.
2233	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2011 OF MIL-STD-1344.
2234	TEST CONDITION LETTER 2234 SHALL APPLY.
6265	MOUNTING SHALL BE IN ACCORDANCE WITH 6265.
6264	MOUNTING SHALL BE BY THE NORMAL METHOD.
6263	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
2236	TEST SPECIMEN SHALL CONSIST OF A MATED PLUG AND RECEPTACLE.
2238	TEST SPECIMEN SHALL BE AN UNMATED CONNECTOR.
2240	AIR LEAKAGE (SEAL). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2240.
2242	AIR LEAKAGE (SEAL). THERE SHALL BE NO VISIBLE BUBBLES INDICATIVE OF LEAKAGE.
2244	AIR LEAKAGE (SEAL). THE LEAKAGE RATE SHALL BE NOT GREATER THAN 2244 STANDARD ATM CC/SEC.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
AIR LEAKAGE (SEAL) (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2246
PER MIL-STD-1344, METHOD 1008.	2248
PRESSURE DIFFERENTIAL (STANDARD ATMOSPHERES)	2250
ORIENTATION (SELECT ONE)	
REAR FACE, LOW PRESSURE SIDE.	2252
FRONT FACE, LOW PRESSURE SIDE.	2254
REVERSE TESTING REQUIRED.	2256
ALTITUDE IMMERSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3048
NO EVIDENCE OF DIELECTRIC BREAKDOWN.	3049
MAXIMUM LEAKAGE CURRENT (MILLIAMPERES)	3052
NO EVIDENCE OF SEAL DETERIORATION OR LEAKAGE.	3054
MINIMUM INSULATION RESISTANCE WHILE IMMERSED (MEGOHMS)	3050

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2246	AIR LEAKAGE (SEAL). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2246.
2248	AIR LEAKAGE (SEAL). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1008 OF MIL-STD-1344.
2250	THE PRESSURE DIFFERENTIAL SHALL BE NOT LESS THAN 2250 STANDARD ATMOSPHERE(S).
2252	THE REAR FACE OF THE CONNECTOR SHALL EXTEND INTO THE LOW PRESSURE SIDE OF THE CHAMBER.
2254	THE FRONT FACE OF THE CONNECTOR SHALL EXTEND INTO THE LOW PRESSURE SIDE OF THE CHAMBER.
2256	REVERSE TESTING SHALL BE REQUIRED.
3048	ALTITUDE IMMERSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3048.
3049	ALTITUDE IMMERSION. THERE SHALL BE NO EVIDENCE OF DIELECTRIC BREAKDOWN.
3052	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 3052 MILLIAMPERE(S).
3054	THE CONNECTOR SHALL SHOW NO EVIDENCE OF MOISTURE SEAL DETERIORATION OR LEAKAGE.
3050	THE INSULATION RESISTANCE WHILE IN THE SALT SOLUTION SHALL BE NOT LESS THAN 3050 MEGOHMS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ALTITUDE IMMERSION (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3030
PER MIL-STD-1344, METHOD 1004.	3031
MINIMUM DIELECTRIC WITHSTANDING VOLTAGE (VOLTS RMS)	3044
DURATION (SECONDS)	3033
ATTACHED ACCESSORIES (NAME)	3040
MINIMUM WIRE OUTSIDE DIMENSION (SELECT ONE)	
(INCH)	3036
(MILLIMETERS)	3037
(WIRE TYPE)	3034
WIRE ENDS (SELECT ONE)	
NOT SEALED.	3035
SEALED.	3039
SEALING PLUGS INSTALLED (PERCENT)	3042

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3030	ALTITUDE IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3030.
3031	ALTITUDE IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1004 OF MIL-STD-1344.
3044	THE DIELECTRIC WITHSTANDING VOLTAGE SHALL BE NOT LESS THAN 3044 VOLTS RMS.
3033	THE DURATION OF DIELECTRIC WITHSTANDING VOLTAGE APPLICATION SHALL BE NOT LESS THAN 3033 SECONDS.
3040	CONNECTOR ACCESSORY(S) TO BE ON CONNECTOR SPECIMEN DURING TEST SHALL BE 3040.
3036	CONNECTORS SHALL BE WIRED WITH WIRE HAVING AN OUTSIDE DIMENSION NOT LESS THAN 3036 INCH.
3037	CONNECTORS SHALL BE WIRED WITH WIRE HAVING AN OUTSIDE DIMENSION NOT LESS THAN 3037 MILLIMETER(S).
3034	WIRE TYPE 3034 SHALL BE USED.
3035	WIRE ENDS SHALL BE UNSEALED.
3039	WIRE ENDS SHALL BE SEALED.
3042	SEALING PLUGS SHALL BE INSTALLED IN 3042 PERCENT OF CONTACT CAVITIES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ALTITUDE-LOW TEMPERATURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3116
NO EVIDENCE OF PHYSICAL DAMAGE OR DIELECTRIC BREAKDOWN.	3118
MAXIMUM LEAKAGE CURRENT (MILLIAMPERES)	3120
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3108
PER MIL-STD-1344, METHOD 1011.	3110
MINIMUM APPLIED VOLTAGE AT REDUCED CONDITIONS (VOLTS RMS)	3122
GROMMET SEALING PLUGS (PERCENT)	3124
ACCESSORIES (NAME)	3126
MINIMUM APPLIED VOLTAGE AT AMBIENT CONDITIONS (VOLTS RMS)	3128

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3116	ALTITUDE-LOW TEMPERATURE. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3116.
3118	ALTITUDE-LOW TEMPERATURE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE OR DIELECTRIC BREAKDOWN.
3120	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 3120 MILLIAMPERE(S).
3108	ALTITUDE-LOW TEMPERATURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3108.
3110	ALTITUDE-LOW TEMPERATURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1011 OF MIL-STD-1344.
3122	THE VOLTAGE TO BE APPLIED AT REDUCED TEMPERATURE AND PRESSURE SHALL BE NOT LESS THAN 3122 VOLTS RMS.
3124	CONNECTORS SHALL BE WIRED BUT 3124 PERCENT OF THE CONTACT CAVITIES SHALL CONTAIN GROMMET SEALING PLUGS.
3126	CONNECTOR ACCESSORY(S) TO BE ON CONNECTOR SPECIMEN DURING TEST SHALL BE 3126.
3128	THE DIELECTRIC WITHSTANDING VOLTAGE TO BE APPLIED AT AMBIENT CONDITIONS SHALL BE NOT LESS THAN 3128 VOLTS RMS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ALTITUDE-LOW TEMPERATURE (CONT)	
PER MIL-STD-1344, METHOD 1011. (CONT)	
VOLTAGE DURATION AT REDUCED CONDITIONS (SECONDS)	3130
VOLTAGE DURATION AT AMBIENT CONDITIONS (SECONDS)	3132
CABLE PULL-OUT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1914
NO EVIDENCE OF PHYSICAL DAMAGE.	3134
NO DISCONTINUITY.	3136
MAXIMUM LINEAR MOTION (SELECT ONE)	
(INCHES)	1916
(MILLIMETERS)	2258
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1904

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

3130 THE DURATION OF VOLTAGE APPLICATION AT REDUCED PRESSURE SHALL BE NOT LESS THAN 3130 SECONDS.

3132 THE DURATION OF VOLTAGE APPLICATION AT AMBIENT CONDITIONS SHALL BE NOT LESS THAN 3132 SECONDS.

1914 CABLE PULL-OUT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1914.

3134 CABLE PULL-OUT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

3136 THERE SHALL BE NO DISCONTINUITY.

1916 THE LINEAR MOTION OF THE CABLE WITH RESPECT TO THE CLAMP SHALL BE NOT GREATER THAN 1916 INCH(S).

2258 THE LINEAR MOTION OF THE CABLE WITH RESPECT TO THE CLAMP SHALL BE NOT GREATER THAN 2258 MILLIMETER(S).

1904 CABLE PULL-OUT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1904.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CABLE PULL-OUT (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-1344, METHOD 2009.	2260
*TEST CONDITION (LETTER)	2262
CABLE (DESIGNATION)	2264
CABLE SEAL FLEXING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2266
NO EVIDENCE OF SEAL DAMAGE.	2268
NO EVIDENCE OF DIELECTRIC BREAKDOWN.	2270
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2272
NO SHORTING.	2274
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY.	2276
MAXIMUM (MICROSECONDS)	2278

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2260	CABLE PULL-OUT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2009 OF MIL-STD-1344.
2262	TEST CONDITION LETTER 2262 SHALL APPLY.
2264	THE CABLE TO BE USED SHALL BE 2264.
2266	CABLE SEAL FLEXING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2266.
2268	CABLE SEAL FLEXING. THERE SHALL BE NO EVIDENCE OF DAMAGE WHICH COULD ALLOW UNDESIRED SUBSTANCES TO ENTER THE INSULATION AND TO CAUSE DETERIORATION OF ELECTRICAL PERFORMANCE.
2270	THERE SHALL BE NO EVIDENCE OF DIELECTRIC BREAKDOWN.
2272	THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 2272 MEGOHM(S).
2274	THERE SHALL BE NO EVIDENCE OF SHORTING BETWEEN CONDUCTORS.
2276	THERE SHALL BE NO EVIDENCE OF DISCONTINUITY.
2278	DISCONTINUITY SHALL BE NOT GREATER THAN 2278 MICROSECOND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CABLE SEAL FLEXING (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2280
PER MIL-STD-1344, METHOD 2017.	2282
PROCEDURE I.	2284
MINIMUM ROLLER DIAMETER (SELECT ONE)	
(INCHES)	2286
(MILLIMETERS)	2288
MINIMUM DIMENSION X (SELECT ONE)	
(INCHES)	2290
(MILLIMETERS)	2292
CYCLE RATE (CYCLES PER MINUTE)	2294
NUMBER OF CYCLES (QUANTITY)	2296
CABLE (DESIGNATION)	2298
CHAIN TENSILE STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1806

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2280	CABLE SEAL FLEXING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2280.
2282	CABLE SEAL FLEXING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2017 OF MIL-STD-1344.
2284	TEST PROCEDURE I SHALL APPLY.
2286	THE ROLLER DIAMETER SHALL BE NOT LESS THAN 2286 INCH(S).
2288	THE ROLLER DIAMETER SHALL BE NOT LESS THAN 2288 MILLIMETER(S).
2290	DIMENSION X BETWEEN THE NEAREST END OF INTERNAL CABLE CLAMP AND ROLLER CENTERLINE SHALL BE NOT LESS THAN 2290 INCH(S).
2292	DIMENSION X BETWEEN THE NEAREST END OF INTERNAL CABLE CLAMP AND ROLLER CENTERLINE SHALL BE NOT LESS THAN 2292 MILLIMETER(S).
2294	CYCLING RATE SHALL BE APPROXIMATELY 2294 CYCLES PER MINUTE.
2296	THERE SHALL BE 2296 CYCLES PERFORMED.
2298	THE CABLE TO BE USED SHALL BE 2298.
1806	CHAIN TENSILE STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1806.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CHAIN TENSILE STRENGTH (CONT)	
REQUIREMENTS (CONT)	
WITHSTAND PULL WITHOUT EVIDENCE OF DAMAGE.	1808
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1800
PER BASE DOCUMENT (DOC DES)	2300
TENSILE PULL (SELECT ONE)	
(POUNDS)	2302
(NEWTONS)	2304
DIRECTION (SELECT ONE)	
IN AXIS OF FASTENER.	2306
RIGHT ANGLE TO AXIS OF FASTENER.	2308
DURATION (MINUTES)	1802
CONTACT AXIAL CONCENTRICITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2990

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1808	CHAIN TENSILE STRENGTH. THE CHAIN SHALL WITHSTAND THE TENSILE PULL WITHOUT EVIDENCE OF DAMAGE.
1800	CHAIN TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1800.
2300	CHAIN TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2300.
2302	A TENSILE PULL OF 2302 POUND(S) SHALL BE APPLIED TO THE END OF THE COVER CHAIN.
2304	A TENSILE PULL OF 2304 NEWTON(S) SHALL BE APPLIED TO THE END OF THE COVER CHAIN.
2306	THE DIRECTION OF PULL SHALL BE WITH THE AXIS OF THE CHAIN IN THE SAME AXIS AS THAT OF THE FASTENER.
2308	THE DIRECTION OF PULL SHALL BE WITH THE AXIS OF THE CHAIN AT RIGHT ANGLES TO THE AXIS OF THE FASTENER.
1802	THE DURATION OF PULL SHALL BE 1802 MINUTE(S).
2990	CONTACT AXIAL CONCENTRICITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2990.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT AXIAL CONCENTRICITY (CONT)	
REQUIREMENTS (CONT)	
MAXIMUM TRUE INDICATOR READING (VALUE)	2992
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2994
PER MIL-STD-1344, METHOD 2001.	2996
CONTACT ENGAGEMENT AND SEPARATION FORCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1712
AS FOLLOWS:	3198
MAXIMUM ENGAGEMENT FORCE (SELECT ONE)	
(POUNDS)	1714
(OUNCES)	2310
(NEWTONS)	2312

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2992	CONTACT AXIAL CONCENTRICITY. THE TRUE INDICATOR READING SHALL BE NOT GREATER THAN 2992.
2994	CONTACT AXIAL CONCENTRICITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2994.
2996	CONTACT AXIAL CONCENTRICITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2001 OF MIL-STD-1344.
1712	CONTACT ENGAGEMENT AND SEPARATION FORCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1712.
3198	CONTACT ENGAGEMENT AND SEPARATION FORCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1714	THE ENGAGEMENT FORCE SHALL BE NOT GREATER THAN 1714 POUND(S).
2310	THE ENGAGEMENT FORCE SHALL BE NOT GREATER THAN 2310 OUNCE(S).
2312	THE ENGAGEMENT FORCE SHALL BE NOT GREATER THAN 2312 NEWTON(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT ENGAGEMENT AND SEPARATION FORCE (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM SEPARATION FORCE (SELECT ONE)	
(POUNDS)	2314
(OUNCES)	2316
(NEWTONS)	2318
MINIMUM SEPARATION FORCE (SELECT ONE)	
(POUNDS)	1716
(OUNCES)	2320
(NEWTONS)	2322
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1705
PER MIL-STD-1344, METHOD 2014.	2324
PROCEDURE I.	2326
MAXIMUM PIN DIAMETER (SELECT ONE)	
(INCH)	2328
(MILLIMETERS)	2330

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2314	THE SEPARATION FORCE SHALL BE NOT GREATER THAN 2314 POUND(S).
2316	THE SEPARATION FORCE SHALL BE NOT GREATER THAN 2316 OUNCE(S).
2318	THE SEPARATION FORCE SHALL BE NOT GREATER THAN 2318 NEWTON(S).
1716	THE SEPARATION FORCE SHALL BE NOT LESS THAN 1716 POUND(S).
2320	THE SEPARATION FORCE SHALL BE NOT LESS THAN 2320 OUNCE(S).
2322	THE SEPARATION FORCE SHALL BE NOT LESS THAN 2322 NEWTON(S).
1705	CONTACT ENGAGEMENT AND SEPARATION FORCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1705.
2324	CONTACT ENGAGEMENT AND SEPARATION FORCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2014 OF MIL-STD-1344.
2326	PROCEDURE I SHALL APPLY.
2328	THE MAXIMUM SIZE PIN SHALL BE 2328 INCH DIAMETER.
2330	THE MAXIMUM SIZE PIN SHALL BE 2330 MILLIMETER(S) DIAMETER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT ENGAGEMENT AND SEPARATION FORCE (CONT)	
PROCEDURE I. (CONT)	
MAXIMUM BLADE WIDTH (SELECT ONE)	
(INCH)	2332
(MILLIMETERS)	2334
MAXIMUM BLADE THICKNESS (SELECT ONE)	
(INCH)	2336
(MILLIMETERS)	2338
MINIMUM PIN DIAMETER (SELECT ONE)	
(INCH)	2340
(MILLIMETERS)	2342
MINIMUM BLADE WIDTH (SELECT ONE)	
(INCH)	2344
(MILLIMETERS)	2346
MINIMUM BLADE THICKNESS (SELECT ONE)	
(INCH)	2348
(MILLIMETERS)	2350

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2332	THE MAXIMUM SIZE BLADE SHALL BE 2332 INCH IN WIDTH.
2334	THE MAXIMUM SIZE BLADE SHALL BE 2334 MILLIMETER(S) IN WIDTH.
2336	THE MAXIMUM SIZE BLADE SHALL BE 2336 INCH IN THICKNESS.
2338	THE MAXIMUM SIZE BLADE SHALL BE 2338 MILLIMETER(S) IN THICKNESS.
2340	THE MINIMUM SIZE PIN SHALL BE 2340 INCH DIAMETER.
2342	THE MINIMUM SIZE PIN SHALL BE 2342 MILLIMETER(S) IN DIAMETER.
2344	THE MINIMUM SIZE BLADE SHALL BE 2344 INCH IN WIDTH.
2346	THE MINIMUM SIZE BLADE SHALL BE 2346 MILLIMETER(S) IN WIDTH.
2348	THE MINIMUM SIZE BLADE SHALL BE 2348 INCH IN THICKNESS.
2350	THE MINIMUM SIZE BLADE SHALL BE 2350 MILLIMETER(S) IN THICKNESS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT ENGAGEMENT AND SEPARATION FORCE (CONT)	
PER MIL-STD-1344, METHOD 2014. (CONT)	
PROCEDURE II.	2352
CONTACT (PART NUMBER)	2354
MAXIMUM SURFACE ROUGHNESS (SELECT ONE)	
(MICROINCHES RMS)	2356
(MICROMETERS RMS)	2358
MINIMUM DEPTH OF ENGAGEMENT (SELECT ONE)	
(INCH)	2360
(MILLIMETERS)	2362
CONTACT INSERTION AND REMOVAL FORCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1746
AS FOLLOWS:	2364

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2352	PROCEDURE II SHALL APPLY.
2354	THE PART NUMBER OF THE QUALIFIED CONTACT TO BE INSERTED SHALL BE 2354.
2356	TEST CONTACT SURFACE FINISH SHALL BE NOT GREATER THAN 2356 MICROINCHES RMS.
2358	TEST CONTACT SURFACE FINISH SHALL BE NOT GREATER THAN 2358 MICROMETERS RMS.
2360	DEPTH OF ENGAGEMENT SHALL BE NOT LESS THAN 2360 INCH.
2362	DEPTH OF ENGAGEMENT SHALL BE NOT LESS THAN 2362 MILLIMETER(S).
1746	CONTACT INSERTION AND REMOVAL FORCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1746.
2364	CONTACT INSERTION AND REMOVAL FORCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT INSERTION AND REMOVAL FORCE (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM INSERTION FORCE (SELECT ONE)	
(POUNDS)	1748
(NEWTONS)	2366
MAXIMUM REMOVAL FORCE (SELECT ONE)	
(POUNDS)	1752
(NEWTONS)	2368
MINIMUM REMOVAL FORCE (SELECT ONE)	
(POUNDS)	1750
(NEWTONS)	2370
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1738
PER MIL-STD-1344, METHOD 2012.	2372

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1748	THE FORCE REQUIRED TO INSERT A CONTACT SHALL BE NOT GREATER THAN 1748 POUND(S).
2366	THE FORCE REQUIRED TO INSERT A CONTACT SHALL BE NOT GREATER THAN 2366 NEWTON(S).
1752	THE FORCE REQUIRED TO REMOVE A CONTACT SHALL BE NOT GREATER THAN 1752 POUND(S).
2368	THE FORCE REQUIRED TO REMOVE A CONTACT SHALL BE NOT GREATER THAN 2368 NEWTON(S).
1750	THE FORCE REQUIRED TO REMOVE A CONTACT SHALL BE NOT LESS THAN 1750 POUND(S).
2370	THE FORCE REQUIRED TO REMOVE A CONTACT SHALL BE NOT LESS THAN 2370 NEWTON(S).
1738	CONTACT INSERTION AND REMOVAL FORCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1738.
2372	CONTACT INSERTION AND REMOVAL FORCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD.2012 OF MIL-STD-1344.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT INSERTION AND REMOVAL FORCE (CONT)	
PER MIL-STD-1344, METHOD 2012. (CONT)	
QUANTITY OF CONTACTS MEASURED (PERCENT)	1740
WIRE TYPE (DESIGNATION)	2374
WIRE DOCUMENT (DOC DES)	2376
CONDUCTOR SIZE (DESIGNATION)	2378
INSERTIONS AND WITHDRAWALS (QUANTITY)	2380
INSERTION TOOL (PART NUMBER)	2382
EXTRACTION TOOL (PART NUMBER)	2384
CONTACT RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2000
MAXIMUM CONTACT RESISTANCE (OHMS)	2371
MAXIMUM CONTACT RESISTANCE AT ELEVATED TEMPERATURE (OHMS)	2373

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1740	THE CONNECTOR SHALL HAVE 1740 PERCENT OF THE CONTACTS MEASURED.
2374	WIRE TYPE 2374 SHALL BE USED.
2376	WIRE SHALL BE IN ACCORDANCE WITH 2376.
2378	CONDUCTOR SIZE 2378 SHALL BE USED.
2380	THERE SHALL BE 2380 INSERTIONS AND WITHDRAWALS WITH MEASUREMENTS TAKEN ON THE FIRST AND LAST CYCLES.
2382	INSERTION TOOL PART NUMBER SHALL BE 2382.
2384	EXTRACTION TOOL PART NUMBER SHALL BE 2384.
2000	CONTACT RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2000.
2371	CONTACT RESISTANCE. CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2371 OHM(S).
2373	CONTACT RESISTANCE AT ELEVATED TEMPERATURE SHALL BE NOT GREATER THAN 2373 OHM(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT RESISTANCE (CONT)	
REQUIREMENTS (CONT)	
MAXIMUM CONTACT RESISTANCE (MILLIVOLTS)	2114
MAXIMUM CONTACT RESISTANCE AT ELEVATED TEMPERATURE (MILLIVOLTS)	2375
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1980
PER MIL-STD-1344, METHOD 3004.	2377
TEST CURRENT (SELECT ONE)	
(AMPERES)	1990
(MILLIAMPERES)	2379
HIGH TEMPERATURE TEST (DEGREES CELSIUS)	1994
CONTACT RETENTION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3002

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2114	CONTACT RESISTANCE. CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2114 MILLIVOLT(S) DROP.
2375	CONTACT RESISTANCE AT ELEVATED TEMPERATURE SHALL BE NOT GREATER THAN 2375 MILLIVOLT(S) DROP.
1980	CONTACT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1980.
2377	CONTACT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3004 OF MIL-STD-1344.
1990	THE TEST CURRENT SHALL BE 1990 AMPERE(S).
2379	THE TEST CURRENT SHALL BE 2379 MILLIAMPERE(S).
1994	IN ADDITION TO MEASUREMENT AT AMBIENT TEMPERATURE, PERFORM MEASUREMENT AT 1994 DEGREES CELSIUS.
3002	CONTACT RETENTION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3002.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT RETENTION (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE.	2381
MAXIMUM DISPLACEMENT WITH FORCE APPLIED (SELECT ONE)	
(INCH)	3004
(MILLIMETERS)	2383
MAXIMUM DISPLACEMENT AFTER FORCE REMOVAL (SELECT ONE)	
(INCH)	3006
(MILLIMETERS)	2385
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2088
PER MIL-STD-1344, METHOD 2007.	2388

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2381	CONTACT RETENTION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
3004	THE AXIAL DISPLACEMENT SHALL BE NOT GREATER THAN 3004 INCH DURING APPLICATION OF AXIAL FORCE.
2383	THE AXIAL DISPLACEMENT SHALL BE NOT GREATER THAN 2383 MILLIMETER(S) DURING APPLICATION OF AXIAL FORCE.
3006	THE AXIAL DISPLACEMENT SHALL BE NOT GREATER THAN 3006 INCH AFTER REMOVAL OF AXIAL FORCE.
2385	THE AXIAL DISPLACEMENT SHALL BE NOT GREATER THAN 2385 MILLIMETER(S) AFTER REMOVAL OF AXIAL FORCE.
2088	CONTACT RETENTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2088.
2388	CONTACT RETENTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2007 OF MIL-STD-1344.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT RETENTION (CONT)	
PER MIL-STD-1344, METHOD 2007. (CONT)	
APPLIED LOAD (SELECT ONE)	
(POUNDS)	2090
PLUS TOLERANCE (POUNDS)	2390
MINUS TOLERANCE (POUNDS)	2392
(NEWTONS)	2394
PLUS TOLERANCE (NEWTONS)	2396
MINUS TOLERANCE (NEWTONS)	2398
LOAD DIRECTION (SELECT ONE)	
WIRE SIDE.	2400
FRONT SIDE.	2402
WIRE AND FRONT SIDE.	2099
QUANTITY CONTACTS TESTED (PERCENT)	2404
CONTACT WIRING (SELECT ONE)	
CUT OFF WIRES.	2094
UNWIRED CONTACTS.	2406

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2090	THE APPLIED AXIAL LOAD SHALL BE 2090 POUND(S).
2390	THE APPLIED AXIAL LOAD PLUS TOLERANCE SHALL BE 2390 POUND(S).
2392	THE APPLIED AXIAL LOAD MINUS TOLERANCE SHALL BE 2392 POUND(S).
2394	THE APPLIED AXIAL LOAD SHALL BE 2394 NEWTON(S).
2396	THE APPLIED AXIAL LOAD PLUS TOLERANCE SHALL BE 2396 NEWTON(S).
2398	THE APPLIED AXIAL LOAD MINUS TOLERANCE SHALL BE 2398 NEWTON(S).
2400	LOAD SHALL BE APPLIED TO THE WIRE SIDE OF THE CONTACT.
2402	LOAD SHALL BE APPLIED TO THE FRONT SIDE OF THE CONTACT.
2099	LOAD SHALL BE APPLIED TO BOTH THE WIRE SIDE AND THE FRONT SIDE OF THE CONTACT.
2404	THE CONNECTOR SHALL HAVE 2404 PERCENT OF THE CONTACTS TESTED.
2094	WIRES SHALL BE CUT OFF FLUSH WITH THE CONTACTS.
2406	UNWIRED CONTACTS SHALL BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
COUPLING PIN STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1794
NO DISPLACEMENT OR LOOSENING.	1796
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1788
PER DOCUMENT (DOC DES)	1790
APPLIED LOAD (SELECT ONE)	
(POUNDS)	1791
(NEWTONS)	1792
CRIMP TENSILE STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3102
MINIMUM TENSILE STRENGTH (POUNDS)	3104
WIRE (SIZE)	3105

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1794	COUPLING PIN STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1794.
1796	COUPLING PIN STRENGTH. COUPLING PINS SHALL WITHSTAND APPLIED LOAD WITHOUT DISPLACEMENT OR PERCEPTIBLE LOOSENING OF THE COUPLING PINS.
1788	COUPLING PIN STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1788.
1790	COUPLING PIN STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1790.
1791	THE APPLIED LOAD SHALL BE 1791 POUND(S).
1792	THE APPLIED LOAD SHALL BE 1792 NEWTON(S).
3102	CRIMP TENSILE STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3102.
3104	CRIMP TENSILE STRENGTH. THE TENSILE FORCE REQUIRED TO SEPARATE THE WIRE FROM THE CONTACT CRIMP BARREL SHALL BE NOT LESS THAN 3104 POUND(S). WIRE BREAKAGE NOT DUE TO CRIMPING, AT LESS THAN TENSILE FORCE, SHALL NOT CONSTITUTE A FAILURE.
3105	FORCE SPECIFIED IS FOR SIZE 3105 WIRE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CRIMP TENSILE STRENGTH (CONT)	
REQUIREMENTS (CONT)	
MINIMUM TENSILE STRENGTH (NEWTONS)	2408
WIRE (SIZE)	2410
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3094
PER MIL-STD-1344, METHOD 2003.	2412
SAMPLE (QUANTITY)	3096
CRIMP TOOL (PART NUMBER)	3098
CRUSH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2414
NO EVIDENCE OF PHYSICAL DAMAGE OR ELECTRICAL FAILURE.	2416
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2418

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2408	CRIMP TENSILE STRENGTH. THE TENSILE FORCE REQUIRED TO SEPARATE THE WIRE FROM THE CONTACT CRIMP BARREL SHALL BE NOT LESS THAN 2408 NEWTON(S). WIRE BREAKAGE NOT DUE TO CRIMPING, AT LESS THAN THE TENSILE FORCE, SHALL NOT CONSTITUTE A FAILURE.
2410	FORCE SPECIFIED IS FOR SIZE 2410 WIRE.
3094	CRIMP TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3094.
2412	CRIMP TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2003 OF MIL-STD-1344.
3096	THE NUMBER OF TEST SAMPLES SHALL BE 3096.
3098	THE CRIMP TOOL PART NUMBER SHALL BE 3098.
2414	CRUSH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2414.
2416	CRUSH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE OR ELECTRICAL FAILURE.
2418	CRUSH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2418.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CRUSH (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-1344, METHOD 2008.	2420
SPECIMEN (SELECT ONE)	
MATED PLUG AND RECEPTACLE.	2422
UNMATED CONNECTOR.	2424
TEST LOAD (SELECT ONE)	
(POUNDS)	2426
(KILOGRAMS)	2428
LOAD APPLICATIONS (QUANTITY)	2430
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4908
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4906
MAXIMUM LEAKAGE (MILLIAMPERES)	4894

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2420	CRUSH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2008 OF MIL-STD-1344.
2422	TEST SPECIMEN SHALL CONSIST OF A MATED PLUG AND RECEPTACLE.
2424	TEST SPECIMEN SHALL BE AN UNMATED CONNECTOR.
2426	TEST LOAD SHALL BE 2426 POUND(S).
2428	TEST LOAD SHALL BE 2428 KILOGRAM(S).
2430	THERE SHALL BE 2430 LOAD APPLICATION(S).
4908	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4908.
4906	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4894	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4894 MILLIAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4884
PER MIL-STD-1344, METHOD 3001.	2432
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4885
(VOLTS, AC)	4849
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4859
DURATION OF VOLTAGE APPLICATION (SECONDS)	4891
MOUNTING PER DOCUMENT (DOC DES)	6280
REGULATION OF TEST VOLTAGE (PERCENT)	6308
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4900
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4902
(MILLIAMPERES)	6310

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4884	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4884.
2432	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3001 OF MIL-STD-1344.
4885	TEST VOLTAGE SHALL BE 4885 VOLTS, DC.
4849	TEST VOLTAGE SHALL BE 4849 VOLTS, AC.
4859	SPECIAL PREPARATION SHALL BE IN ACCORDANCE WITH 4859.
4891	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4891 SECOND(S).
6280	MOUNTING SHALL BE IN ACCORDANCE WITH 6280.
6308	REGULATION OF THE TEST VOLTAGE SHALL BE WITHIN 6308 PERCENT.
4900	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4900 KILOVOLTAMPERE(S).
4902	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4902 AMPERE(S).
6310	THE SURGE CURRENT SHALL BE NOT GREATER THAN 6310 MILLIAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
PER MIL-STD-1344, METHOD 3001. (CONT)	
TEST SPECIMEN (SELECT ONE)	
MATED PLUG AND RECEPTACLE.	2434
UNMATED CONNECTOR.	2436
TEST CONDITION NUMBER	
II.	2438
III.	2440
IV.	2442
V.	2444
VI.	2446
WIRE ENDS (SELECT ONE)	
SEALED.	2448
UNSEALED.	2450
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4874

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2434	TEST SPECIMEN SHALL CONSIST OF A MATED PLUG AND RECEPTACLE.
2436	TEST SPECIMEN SHALL BE AN UNMATED CONNECTOR.
2438	TEST CONDITION II SHALL APPLY.
2440	TEST CONDITION III SHALL APPLY.
2442	TEST CONDITION IV SHALL APPLY.
2444	TEST CONDITION V SHALL APPLY.
2446	TEST CONDITION VI SHALL APPLY.
2448	WIRE ENDS SHALL BE SEALED.
2450	WIRE ENDS SHALL BE UNSEALED.
4874	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4856
MAXIMUM LEAKAGE (MILLIAMPERES)	4875
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4861
PER MIL-STD-1344, METHOD 3001, TEST CONDITION I.	2452
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4854
(VOLTS, AC)	4855
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4850
DURATION OF VOLTAGE APPLICATION (SECONDS)	4867
MOUNTING PER DOCUMENT (DOC DES)	5000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4856	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4875	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4875 MILLIAMPERE(S).
4861	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861.
2452	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3001 OF MIL-STD-1344. TEST CONDITION I SHALL APPLY.
4854	TEST VOLTAGE SHALL BE 4854 VOLTS, DC.
4855	TEST VOLTAGE SHALL BE 4855 VOLTS, AC.
4850	SPECIAL PREPARATION OR CONDITIONS SHALL BE IN ACCORDANCE WITH 4850.
4867	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4867 SECOND(S).
5000	MOUNTING SHALL BE IN ACCORDANCE WITH 5000.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
PER MIL-STD-1344, METHOD 3001, TEST CONDITION I. (CONT)	
REGULATION OF TEST VOLTAGE (PERCENT)	4869
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4870
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4717
(MILLIAMPERES)	4897
METHOD OF VOLTAGE CONNECTION PER DOCUMENT (DOC DES)	6267
TEST SPECIMEN (SELECT ONE)	
MATED PLUG AND RECEPTACLE.	2454
UNMATED CONNECTOR.	2456
DURABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1632

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4869	REGULATION OF TEST VOLTAGE SHALL BE WITHIN 4869 PERCENT.
4870	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4870 KILOVOLTAMPERE(S).
4717	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4717 AMPERE(S).
4897	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4897 MILLIAMPERE(S).
6267	METHOD OF CONNECTION OF TEST VOLTAGE SHALL BE IN ACCORDANCE WITH 6267.
2454	TEST SPECIMEN SHALL CONSIST OF A MATED PLUG AND RECEPTACLE.
2456	TEST SPECIMEN SHALL CONSIST OF AN UNMATED CONNECTOR.
1632	DURABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1632.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DURABILITY (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF CONTACT OR INSERT DAMAGE.	1634
MAXIMUM CONTACT RESISTANCE (MILLIVOLTS)	2458
MINIMUM CONTACT SEPARATION FORCE (SELECT ONE)	
(POUNDS)	2460
(NEWTONS)	2462
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1624
PER MIL-STD-1344, METHOD 2016.	2464
CYCLES (QUANTITY)	1626
CYCLING RATE (CYCLES PER HOUR)	1628
ELECTRICAL ENGAGEMENT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1898

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1634	DURABILITY. THERE SHALL BE NO EVIDENCE OF UNEVEN WEAR ON ENGAGING HARDWARE, CONTACTS, OR GUIDE HARDWARE NOR EXCESSIVE REMOVAL OF PLATING ON CONTACTS. CONTACTS SHALL BE NOT DISPLACED, BROKEN OR BENT. INSERTS SHALL SHOW NO EVIDENCE OF PIERCING, BREAKING OR CHIPPING.
2458	THE CONTACT RESISTANCE MILLIVOLT DROP SHALL BE NOT GREATER THAN 2458 MILLIVOLT(S).
2460	THE INDIVIDUAL CONTACT SEPARATION FORCE AFTER TEST SHALL BE NOT LESS THAN 2460 POUND(S).
2462	THE INDIVIDUAL CONTACT SEPARATION FORCE AFTER TEST SHALL BE NOT LESS THAN 2462 NEWTON(S).
1624	DURABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1624.
2464	DURABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2016 OF MIL-STD-1344.
1626	THERE SHALL BE 1626 MATING AND UNMATING CYCLES.
1628	THE CYCLING RATE SHALL BE 1628 CYCLES PER HOUR.
1898	ELECTRICAL ENGAGEMENT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1898.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELECTRICAL ENGAGEMENT (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	2466
ONLY AFTER POLARIZATION.	2468
MINIMUM ENGAGEMENT (SELECT ONE)	
(INCH)	1900
(MILLIMETERS)	2470
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1892
PER MIL-C-38999.	1894
EXTERNAL BENDING MOMENT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1848
NO EVIDENCE OF DAMAGE.	1850
NO LOSS OF CONTINUITY.	2472

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2466	ELECTRICAL ENGAGEMENT. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2468	ELECTRICAL ENGAGEMENT SHALL OCCUR ONLY AFTER POLARIZATION.
1900	WIRED, MATED CONNECTORS SHALL PROVIDE AN ELECTRICAL ENGAGEMENT OF NOT LESS THAN 1900 INCH.
2470	WIRED, MATED CONNECTORS SHALL PROVIDE AN ELECTRICAL ENGAGEMENT OF NOT LESS THAN 2470 MILLIMETER(S).
1892	ELECTRICAL ENGAGEMENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1892.
1894	ELECTRICAL ENGAGEMENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-38999.
1848	EXTERNAL BENDING MOMENT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1848.
1850	EXTERNAL BENDING MOMENT. THERE SHALL BE NO EVIDENCE OF DAMAGE DETRIMENTAL TO NORMAL OPERATION.
2472	THERE SHALL BE NO INTERRUPTION OF ELECTRICAL CONTINUITY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
EXTERNAL BENDING MOMENT (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1840
PER DOCUMENT (DOC DES)	2474
APPLIED BENDING MOMENT (SELECT ONE)	
(OUNCE-INCHES)	2476
(POUND-INCHES)	1842
(NEWTON METERS)	2478
FIRE WALL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1926
NO PASSAGE OF FLAME THROUGH CONNECTOR.	1928
NO DISCONTINUITY, FIRST FIVE MINUTES.	2480
MAXIMUM CURRENT, SIXTH MINUTE (AMPERES)	2482
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1920
PER MIL-STD-1344, METHOD 1009.	2484

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1840	EXTERNAL BENDING MOMENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1840.
2474	EXTERNAL BENDING MOMENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2474.
2476	APPLIED BENDING MOMENT SHALL BE 2476 OUNCE-INCH(S).
1842	APPLIED BENDING MOMENT SHALL BE 1842 POUND-INCH(S).
2478	APPLIED BENDING MOMENT SHALL BE 2478 NEWTON METER(S).
1926	FIRE WALL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1926.
1928	FIRE WALL. THERE SHALL BE NO PASSAGE OF FLAME THROUGH THE CONNECTOR.
2480	THERE SHALL BE NO DISCONTINUITY DURING FIRST FIVE MINUTES OF FLAME APPLICATION.
2482	DURING SIXTH MINUTE CONNECTOR CURRENT SHALL BE NOT GREATER THAN 2482 AMPERE(S).
1920	FIRE WALL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1920.
2484	FIRE WALL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1009 OF MIL-STD-1344.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FIRE WALL (CONT)	
PER MIL-STD-1344, METHOD 1009. (CONT)	
FIRST FIVE MINUTES CURRENT (AMPERES)	2486
SIXTH MINUTE VOLTAGE (VOLTS AC)	2488
VIBRATION (SELECT ONE)	
FREQUENCY (HERTZ)	2490
*AMPLITUDE (INCH)	2492
FREQUENCY (HERTZ)	2494
*AMPLITUDE (MILLIMETERS)	2496
SPECIAL MOUNTING ____	2498
FLAMMABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2500
NO VIOLENT BURNING OR EXPLOSIVE TYPE FIRE.	2502
MAXIMUM FLAME DURATION (SECONDS)	2504
MAXIMUM AFTER-GLOW (SECONDS)	2506
MAXIMUM FLAME AND AFTER-GLOW (SECONDS)	2508
NO IGNITION OF FLAMMABLE MATERIAL.	2510

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2486	DURING THE FIRST FIVE MINUTES OF FLAME APPLICATION, CONTACTS SHALL CARRY 2486 AMPERE(S) DC OF CURRENT.
2488	SIXTH MINUTE TEST POTENTIAL SHALL BE 2488 VOLT(S) AC AT 60 HERTZ APPLIED BETWEEN ADJACENT CONTACTS AND BETWEEN CONTACTS AND SHELL.
2490 2492	VIBRATION FREQUENCY SHALL BE 2490 HERTZ WITH AN AMPLITUDE OF 2492 INCH.
2494 2496	VIBRATION FREQUENCY SHALL BE 2494 HERTZ WITH AN AMPLITUDE OF 2496 MILLIMETER(S).
2498	SPECIAL MOUNTING SHALL BE 2498.
2500	FLAMMABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2500.
2502	FLAMMABILITY. THERE SHALL BE NO VIOLENT BURNING OR EXPLOSIVE TYPE FIRE.
2504	FLAME SHALL EXTINGUISH WITHIN 2504 SECOND(S).
2506	AFTER-GLOW SHALL EXTINGUISH WITHIN 2506 SECOND(S).
2508	FLAME AND AFTER-GLOW SHALL EXTINGUISH WITHIN 2508 SECOND(S).
2510	THERE SHALL BE NO DRIPPING WHICH SHALL CAUSE THE FLAMMABLE MATERIAL TO IGNITE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLAMMABILITY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2512
PER MIL-STD-1344, METHOD 1012.	2514
TEST CONDITION (LETTER)	2516
FLUID IMMERSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1782
NO EVIDENCE OF PHYSICAL DAMAGE.	2518
MEET MATING AND UNMATING FORCE REQUIREMENTS.	1784
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1776
PER MIL-STD-1344, METHOD 1016.	2520
FLUIDS DELETED (LETTERS)	2522

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2512	FLAMMABILITY. TESTING SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2512.
2514	FLAMMABILITY. TESTING SHALL BE IN ACCORDANCE WITH METHOD 1012 OF MIL-STD-1344.
2516	TEST CONDITION 2516 SHALL APPLY.
1782	FLUID IMMERSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1782.
2518	FLUID IMMERSION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE, BUT DISCOLORATION SHALL NOT BE CONSIDERED DETRIMENTAL.
1784	CONNECTORS SHALL MEET MATING AND UNMATING FORCE REQUIREMENT(S) AFTER TEST.
1776	FLUID IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1776.
2520	FLUID IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1016 OF MIL-STD-1344.
2522	FLUID(S) AS REFERENCED IN METHOD 1016 OF MIL-STD-1344 WHICH SHALL NOT BE USED SHALL BE LETTER(S) 2522.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLUID IMMERSION (CONT)	
PER MIL-STD-1344, METHOD 1016. (CONT)	
FLUIDS ADDED (NAME)	1778
IMMERSION DURATION (SELECT ONE)	
(MINUTES)	2524
(HOURS)	2526
DRAIN DURATION (HOURS)	2528
OVEN CURE TEMPERATURE (DEGREES CELSIUS)	1779
CYCLES OF IMMERSION (QUANTITY)	2530
IMMERSION DURATION IN METHOD 1016 FLUIDS (HOURS)	1781
SPECIMEN (SELECT ONE)	
UNMATED CONNECTOR WITHOUT CONTACTS.	2532
MATED WIRED PAIR.	2534
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4760

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1778	FLUID(S) TO BE ADDED SHALL BE 1778.
2524	ADDED FLUID(S) IMMERSION DURATION SHALL BE 2524 MINUTE(S).
2526	ADDED FLUID(S) IMMERSION DURATION SHALL BE 2526 HOUR(S).
2528	ADDED FLUID(S) DRAIN DURATION SHALL BE 2528 HOUR(S).
1779	ADDED FLUID(S) 6-HOUR OVEN CURE TEMPERATURE SHALL BE 1779 DEGREES CELSIUS.
2530	THERE SHALL BE 2530 CYCLE(S) OF IMMERSION IN THE ADDED FLUID(S).
1781	IMMERSION DURATION FOR FLUIDS REFERENCED IN METHOD 1016 OF MIL-STD-1344 SHALL BE 1781 HOUR(S).
2532	ONE UNMATED CONNECTOR WITHOUT CONTACTS SHALL BE IMMERSED IN EACH SPECIFIED FLUID.
2534	A MATED PAIR OF WIRED CONNECTORS SHALL BE IMMERSED IN EACH FLUID.
4760	FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FUNGUS (CONT)	
REQUIREMENTS (CONT)	
FUNGUS RESISTANT BY CERTIFICATION OR BY TEST.	4761
NO EVIDENCE OF FUNGUS GROWTH WHEN TESTED.	4762
REQUIREMENT 4 OF MIL-STD-454.	2536
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4754
PER MIL-STD-810, METHOD 508.	4755
TEST PERIOD (DAYS)	4756
GAGE LOCATION AND RETENTION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1768

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4761	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNALS MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED, THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4762	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
2536	FUNGUS. MATERIALS OF CONSTRUCTION FOR THE CONNECTOR SHALL BE NONNUTRIENT FOR FUNGUS AS SPECIFIED IN REQUIREMENT 4 OF MIL-STD-454. CERTIFICATION OF THIS REQUIREMENT SHALL BE PROVIDED BY THE MANUFACTURER.
4754	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.
4755	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.
4756	TEST PERIOD SHALL BE 4756 DAY(S).
1768	GAGE LOCATION AND RETENTION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1768.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
GAGE LOCATION AND RETENTION (CONT)	
REQUIREMENTS (CONT)	
CONFORM TO SPECIFIED DIMENSIONS.	2538
MAXIMUM DISPLACEMENT AFTER LOADING (SELECT ONE)	
(INCH)	1770
(MILLIMETERS)	2540
GAGE RETAINED.	2542
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1756
PER MIL-STD-1344, METHOD 2018.	2544
TEST GAGE PER (DOC DES)	1760
REFERENCE PLANE ____	2546
APPLIED AXIAL LOAD (SELECT ONE).	
(POUNDS)	1764
(NEWTONS)	2548

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2538	GAGE LOCATION AND RETENTION. GAGE LOCATION MEASUREMENTS SHALL FALL WITHIN THE SPECIFIED RANGE.
1770	THE DISPLACEMENT AFTER INITIAL LOAD IS APPLIED SHALL BE NOT GREATER THAN 1770 INCH.
2540	THE DISPLACEMENT AFTER INITIAL LOAD IS APPLIED SHALL BE NOT GREATER THAN 2540 MILLIMETER(S).
2542	GAGES SHALL BE RETAINED IN THE CONTACT CAVITIES.
1756	GAGE LOCATION AND RETENTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1756.
2544	GAGE LOCATION AND RETENTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2018 OF MIL-STD-1344.
1760	TEST GAGE(S) SHALL BE IN ACCORDANCE WITH 1760.
2546	THE REFERENCE PLANE SHALL BE 2546.
1764	APPLIED AXIAL LOAD SHALL BE 1764 POUND(S).
2548	APPLIED AXIAL LOAD SHALL BE 2548 NEWTON(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4798
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	4799
NO DEGRADATION OF PERFORMANCE.	4815
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1477
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	4795
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	4805
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	4813
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	4803
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4788

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4798	HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.
4799	HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
4815	THERE SHALL BE NO DEGRADATION OF PERFORMANCE.
1477	THERE SHALL BE NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DIELECTRIC WITHSTANDING VOLTAGE IS PERFORMED.
4795	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4795 MEGOHM(S) AT HIGH HUMIDITY.
4805	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4805 MEGOHM(S) AFTER DRYING.
4813	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4813 MILLIAMPERE(S) AT HIGH HUMIDITY.
4803	DC DURRENT LEAKAGE SHALL BE NOT GREATER THAN 4803 MILLIAMPERE(S) AFTER DRYING.
4788	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-1344, METHOD 1002.	2550
PROCEDURE TYPE (SELECT ONE)	
TYPE I.	2552
DURATION OF POLARIZING VOLTAGE (HOURS)	4790
TYPE II.	2554
STEP 7A NOT REQUIRED.	2556
TYPE III.	2558
STEP 7A NOT REQUIRED.	2560
POLARIZING VOLTAGE (VOLTS DC)	4793
POLARIZING VOLTAGE BETWEEN ALTERNATE CONTACTS CONNECTED ELECTRICALLY AND OTHER CONTACTS AND SHELL CONNECTED ELECTRICALLY.	2562
SPECIMEN (SELECT ONE)	
MATED, WIRED CONNECTORS.	2564
INDIVIDUAL, WIRED CONNECTORS.	2566
SEALING PLUGS IN (PERCENT OF CAVITIES)	2568
WIRE (SIZE)	2570
WIRE (TYPE)	2572

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2550	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1002 OF MIL-STD-1344.
2552	PROCEDURE TYPE I SHALL APPLY.
4790	POLARIZING VOLTAGE SHALL BE APPLIED FOR 4790 HOUR(S).
2554	PROCEDURE TYPE II SHALL APPLY.
2556	STEP 7A SHALL NOT APPLY.
2558	PROCEDURE TYPE III SHALL APPLY.
2560	STEP 7A SHALL NOT APPLY.
4793	POLARIZING VOLTAGE SHALL BE 4793 VOLTS DC.
2562	POLARIZING VOLTAGE SHALL BE APPLIED BETWEEN ALTERNATE CONTACTS CONNECTED TOGETHER ELECTRICALLY AND THE REMAINING CONTACTS AND SHELL CONNECTED ELECTRICALLY.
2564	MATED, WIRED CONNECTORS SHALL BE TESTED.
2566	INDIVIDUAL, WIRED CONNECTORS SHALL BE TESTED.
2568	SEALING PLUGS SHALL BE INSTALLED IN 2568 PERCENT OF THE CONTACT CAVITIES.
2570	CONTACTS SHALL BE WIRED WITH SIZE 2570 WIRE.
2572	WIRE TYPE SHALL BE 2572.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
PER MIL-STD-1344, METHOD 1002. (CONT)	
DIELECTRIC WITHSTANDING VOLTAGE (SELECT ONE)	
(VOLTS AC)	2574
(VOLTS DC)	2576
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	2578
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER REMOVAL FROM CHAMBER.	2580
INSERT GROMMET BONDING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1886
NO FAILURE OF BOND.	1888
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1878

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2574	THE DIELECTRIC WITHSTANDING VOLTAGE SHALL BE 2574 VOLTS AC.
2576	THE DIELECTRIC WITHSTANDING VOLTAGE SHALL BE 2576 VOLTS DC.
2578	PERFORM DIELECTRIC WITHSTANDING VOLTAGE AT HIGH HUMIDITY.
2580	PERFORM DIELECTRIC WITHSTANDING VOLTAGE AFTER REMOVAL FROM THE CHAMBER.
1886	INSERT GROMMET BONDING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1886.
1888	INSERT GROMMET BONDING. THE BONDED ASSEMBLY SHALL SHOW EVIDENCE OF COHESIVE FAILURE OF THE INSERT FACE SEAL, GROMMET OR INSERT MATERIAL RATHER THAN COMPLETE ADHESIVE FAILURE OF BOND. THE TEST SHALL BE CONDUCTED USING THE COMPLETE INSERT ASSEMBLY IN ITS FINAL FORM PRIOR TO ASSEMBLY INTO THE CONNECTOR SHELL.
1878	INSERT GROMMET BONDING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1878.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSERT GROMMET BONDING (CONT)	
TEST METHODS (CONT)	
PER MIL-C-26482.	3140
MINIMUM DURATION IN OVER (HOURS)	1880
OVEN TEMPERATURE (DEGREES CELSIUS)	1882
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2584
INSERT RETENTION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1732
RETAIN INSERT WITHOUT DAMAGE.	1734
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1720
PER MIL-STD-1344, METHOD 2010.	2582

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3140	INSERT GROMMET BONDING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-26482.
1880	THE DURATION IN THE CONDITIONING OVEN SHALL BE NOT LESS THAN 1880 HOUR(S).
1882	THE OVEN TEMPERATURE SHALL BE 1882 DEGREES CELSIUS.
2584	THE OVEN TEMPERATURE TOLERANCE SHALL BE 2584 DEGREES CELSIUS.
1732	INSERT RETENTION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1732.
1734	INSERT RETENTION. THE CONNECTOR SHALL RETAIN THE INSERT IN THE PROPER LOCATION IN THE SHELL. EVIDENCE OF CRACKING, BREAKING, INSERT SEPARATION FROM THE SHELL, OR LOOSENING OF PARTS SHALL BE CAUSE FOR REJECTION.
1720	INSERT RETENTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1720.
2582	INSERT RETENTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2010 OF MIL-STD-1344.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSERT RETENTION (CONT)	
PER MIL-STD-1344, METHOD 2010. (CONT)	
APPLIED LOAD (SELECT ONE)	
(POUNDS PER SQUARE INCH)	1722
(KILOPASCALS)	3138
SPECIMEN (SELECT ONE)	
WIRED.	2586
UNWIRED.	2588
PRESSURE APPLICATION (SELECT ONE)	
FRONT FACE.	1724
REAR FACE.	1725
FRONT AND REAR FACE.	1726
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1380

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1722	THE LOAD TO BE APPLIED SHALL BE NOT LESS THAN 1722 POUNDS PER SQUARE INCH.
3138	THE LOAD TO BE APPLIED SHALL BE NOT LESS THAN 3138 KILOPASCAL(S).
2586	TEST SPECIMEN SHALL BE WIRED.
2588	TEST SPECIMEN SHALL BE UNWIRED.
1724	THE PRESSURE SHALL BE APPLIED TO THE FRONT FACE OF THE CONNECTOR INSERT.
1725	THE PRESSURE SHALL BE APPLIED TO THE REAR FACE OF THE CONNECTOR INSERT.
1726	THE PRESSURE SHALL BE APPLIED TO BOTH FACES OF THE CONNECTOR INSERT.
1380	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	6359
*MINIMUM INSULATION RESISTANCE (SELECT ONE)	
SINGLE TEST	
(MEGOHMS)	1386
MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	1384
*SECOND TEST (MEGOHMS)	1387
NO EVIDENCE OF PHYSICAL DAMAGE.	1407
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1371
PER MIL-STD-1344, METHOD 3003.	2590
TEST VOLTAGE (VOLTS, DC)	1373
ELECTRIFICATION TIME (SECONDS)	1376

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6359	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1386	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 1386 MEGOHM(S).
1384	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1384 MEGOHM(S) AT THE FIRST TEST TEMPERATURE.
1387	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1387 MEGOHM(S) AT THE SECOND TEST TEMPERATURE.
1407	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1371	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.
2590	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3003 OF MIL-STD-1344.
1373	TEST POTENTIAL SHALL BE 1373 VOLTS, DC.
1376	ELECTRIFICATION DURATION SHALL BE 1376 SECOND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
PER MIL-STD-1344, METHOD 3003. (CONT)	
MAXIMUM MEASUREMENT ERROR AT REQUIRED VALUE (PERCENT)	1377
SPECIAL PREPARATIONS OR CONDITIONS PER DOCUMENT (DOC DES)	1520
FIRST TEST TEMPERATURE (DEGREES CELSIUS)	1372
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	1381
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1383
TEST SPECIMEN (SELECT ONE)	
CONNECTOR MATED PAIR.	2592
UNMATED CONNECTOR.	2594
SPECIAL PREPARATIONS ____	2596
LOW-SIGNAL LEVEL CONTACT RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2060
MAXIMUM VOLTAGE DROP (MILLIVOLTS)	2598

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1377	THE MEASUREMENT ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1377 PERCENT.
1520	SPECIAL PREPARATIONS OR CONDITIONS SHALL BE IN ACCORDANCE WITH 1520.
1372	FIRST TEST TEMPERATURE SHALL BE 1372 DEGREES CELSIUS.
1381	SECOND TEST TEMPERATURE SHALL BE 1381 DEGREES CELSIUS.
1383	TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1383 DEGREES CELSIUS.
2592	TEST SPECIMEN SHALL BE A CONNECTOR MATED PAIR.
2594	TEST SPECIMEN SHALL BE AN UNMATED CONNECTOR.
2596	SPECIAL PREPARATIONS SHALL BE 2596.
2060	LOW-SIGNAL LEVEL CONTACT RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2060.
2598	LOW-SIGNAL LEVEL CONTACT RESISTANCE. THE VOLTAGE DROP SHALL BE NOT GREATER THAN 2598 MILLIVOLT(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LOW-SIGNAL LEVEL CONTACT RESISTANCE (CONT)	
REQUIREMENTS (CONT)	
MAXIMUM CONTACT RESISTANCE (OHMS)	2062
MAXIMUM CHANGE IN READING (PERCENT)	2600
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2052
PER MIL-STD-1344, METHOD 3002.	2602
WIRE (SIZE)	2054
MINIMUM CONTACT INTERFACE (PERCENT)	2604
MAGNETIC PERMEABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1646
MAXIMUM PERMEABILITY (MU)	1648

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2062	LOW-SIGNAL LEVEL CONTACT RESISTANCE. THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2062 OHM(S).
2600	CONTACT RESISTANCE (VOLTAGE DROP) SHALL VARY NOT GREATER THAN 2600 PERCENT FROM ONE READING TO ANOTHER OR FROM THE READING AT NOMINAL CURRENT.
2052	LOW-SIGNAL LEVEL CONTACT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2052.
2602	LOW-SIGNAL LEVEL CONTACT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3002 OF MIL-STD-1344.
2054	CONTACTS SHALL BE WIRED WITH SIZE 2054 WIRE.
2604	CONTACT INTERFACE SHALL BE NOT LESS THAN 2604 PERCENT OF NOMINAL INTERFACE DIMENSION.
1646	MAGNETIC PERMEABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1646.
1648	MAGNETIC PERMEABILITY. THE PERMEABILITY SHALL BE NOT GREATER THAN 1648 MU.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAGNETIC PERMEABILITY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1640
PER MIL-STD-1344, METHOD 3006.	2606
TEST SPECIMEN (SELECT ONE)	
FULLY ASSEMBLED CONNECTOR.	2608
UNMATED CONNECTOR WITHOUT CONTACTS.	2610
CONNECTOR CONTACTS.	2612
MAINTENANCE AGING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2078
AS FOLLOWS:	2614
MAXIMUM INSERTION FORCE (SELECT ONE)	
(POUNDS)	2082
(NEWTONS)	2616

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1640	MAGNETIC PERMEABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1640.
2606	MAGNETIC PERMEABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3006 OF MIL-STD-1344.
2608	TEST SPECIMEN SHALL BE A FULLY ASSEMBLED CONNECTOR.
2610	TEST SPECIMEN SHALL BE AN UNMATED CONNECTOR WITHOUT CONTACTS.
2612	TEST SPECIMEN SHALL BE THE CONNECTOR CONTACT(S).
2078	MAINTENANCE AGING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2078.
2614	MAINTENANCE AGING. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2082	THE INSERTION FORCE SHALL BE NOT GREATER THAN 2082 POUND(S) AFTER TEST INSERTIONS AND WITHDRAWALS.
2616	THE INSERTION FORCE SHALL BE NOT GREATER THAN 2616 NEWTON(S) AFTER TEST INSERTIONS AND WITHDRAWALS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAINTENANCE AGING (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM REMOVAL FORCE (SELECT ONE)	
(POUNDS)	2618
(NEWTONS)	2620
MINIMUM REMOVAL FORCE (SELECT ONE)	
(POUNDS)	2622
(NEWTONS)	2624
MEET CONNECTOR MATING AND UNMATING FORCE REQUIREMENTS.	2626
MEET CONTACT RETENTION REQUIREMENTS.	2628
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2066
PER MIL-STD-1344, METHOD 2002.	2630

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2618	THE REMOVAL FORCE SHALL BE NOT GREATER THAN 2618 POUND(S) AFTER TEST INSERTIONS AND WITHDRAWALS.
2620	THE REMOVAL FORCE SHALL BE NOT GREATER THAN 2620 NEWTON(S) AFTER TEST INSERTIONS AND WITHDRAWALS.
2622	THE REMOVAL FORCE SHALL BE NOT LESS THAN 2622 POUND(S) AFTER TEST INSERTIONS AND WITHDRAWALS.
2624	THE REMOVAL FORCE SHALL BE NOT LESS THAN 2624 NEWTON(S) AFTER TEST INSERTIONS AND WITHDRAWALS.
2626	CONNECTORS SHALL MEET MATING AND UNMATING FORCE REQUIREMENT(S) AFTER TEST INSERTIONS AND WITHDRAWALS.
2628	CONNECTORS SHALL MEET CONTACT RETENTION REQUIREMENT(S) AFTER TEST INSERTIONS AND WITHDRAWALS.
2066	MAINTENANCE AGING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2066.
2630	MAINTENANCE AGING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2002 OF MIL-STD-1344.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAINTENANCE AGING (CONT)	
PER MIL-STD-1344, METHOD 2002. (CONT)	
INSERTION TOOL (TYPE)	2068
REMOVAL TOOL (TYPE)	2070
WIRE (SIZE)	2632
WIRE (DOC DES)	2634
MATING AND UNMATING FORCES	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1658
AS FOLLOWS:	2636
MAXIMUM MATING FORCE (SELECT ONE)	
(POUNDS)	1660
(NEWTONS)	2638
MAXIMUM UNMATING FORCE (SELECT ONE)	
(POUNDS)	1663
(NEWTONS)	2640

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2068	THE TYPE OF INSERTION TOOLS SHALL BE 2068.
2070	THE TYPE OF REMOVAL TOOLS SHALL BE 2070.
2632	CONTACT SHALL BE WIRED WITH SIZE 2632 WIRE.
2634	WIRE SHALL BE IN ACCORDANCE WITH 2634.
1658	MATING AND UNMATING FORCES. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1658.
2636	MATING AND UNMATING FORCES. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1660	THE FORCE REQUIRED TO MATE CONNECTORS SHALL BE NOT GREATER THAN 1660 POUND(S).
2638	THE FORCE REQUIRED TO MATE CONNECTORS SHALL BE NOT GREATER THAN 2638 NEWTON(S).
1663	THE FORCE REQUIRED TO UNMATE CONNECTORS SHALL BE NOT GREATER THAN 1663 POUND(S).
2640	THE FORCE REQUIRED TO UNMATE CONNECTORS SHALL BE NOT GREATER THAN 2640 NEWTON(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MATING AND UNMATING FORCES (CONT)	
AS FOLLOWS: (CONT)	
MINIMUM UNMATING FORCE (SELECT ONE)	
(POUNDS)	1662
(NEWTONS)	2642
MAXIMUM MATING OR UNMATING TORQUE (SELECT ONE)	
(OUNCE-INCHES)	2644
(POUND-INCHES)	1674
(NEWTON METERS)	2646
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1652
PER MIL-STD-1344, METHOD 2013.	2648
MATING RATE (SELECT ONE)	
GRADUAL.	2650
(INCHES PER MINUTE)	2652
(MILLIMETERS PER MINUTE)	2654

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1662	THE FORCE REQUIRED TO UNMATE CONNECTORS SHALL BE NOT LESS THAN 1662 POUND(S).
2642	THE FORCE REQUIRED TO UNMATE CONNECTORS SHALL BE NOT LESS THAN 2642 NEWTON(S).
2644	THE TORQUE REQUIRED TO MATE AND UNMATE CONNECTORS SHALL BE NOT GREATER THAN 2644 OUNCE-INCH(S).
1674	THE TORQUE REQUIRED TO MATE AND UNMATE CONNECTORS SHALL BE NOT GREATER THAN 1674 POUND-INCH(S).
2646	THE TORQUE REQUIRED TO MATE AND UNMATE CONNECTORS SHALL BE NOT GREATER THAN 2646 NEWTON METER(S).
1652	MATING AND UNMATING FORCES. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1652.
2648	MATING AND UNMATING FORCES. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2013 OF MIL-STD-1344.
2650	CONNECTORS SHALL BE GRADUALLY MATED AND UNMATED.
2652	CONNECTOR SHALL BE MATED AND UNMATED AT A RATE NOT GREATER THAN 2652 INCH(S) PER MINUTE.
2654	CONNECTOR SHALL BE MATED AND UNMATED AT A RATE NOT GREATER THAN 2654 MILLIMETER(S) PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MATING AND UNMATING FORCES (CONT)	
PER MIL-STD-1344, METHOD 2013. (CONT)	
PREMEASUREMENT MATING AND UNMATING CYCLES (QUANTITY)	2656
OVERSIZE PIN EXCLUSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2658
NO ENTRY OF TEST PIN.	2660
MEET CONTACT RESISTANCE REQUIREMENT.	2662
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2664
POSITION STEEL PIN.	2666
APPLIED FORCE (SELECT ONE)	
(POUNDS)	2668
(NEWTONS)	2670

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2656	PRIOR TO MEASUREMENTS CONNECTORS SHALL BE MATED AND UNMATED 2656 TIMES.
2658	OVERSIZE PIN EXCLUSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2658.
2660	OVERSIZE PIN EXCLUSION. THE SOCKETS SHALL EXCLUDE THE ENTRY OF THE TEST PIN.
2662	THE CONTACTS SHALL MEET CONTACT RESISTANCE REQUIREMENT AFTER TEST.
2664	OVERSIZE PIN EXCLUSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2664.
2666	OVERSIZE PIN EXCLUSION. TESTING SHALL BE PERFORMED WITH A HARDENED STEEL PIN PLACED IN A POSITION TO ENTER THE SOCKET BORE.
2668	AN AXIAL FORCE OF 2668 POUND(S) SHALL BE APPLIED TENDING TO FORCE THE PIN INTO THE SOCKET.
2670	AN AXIAL FORCE OF 2670 NEWTON(S) SHALL BE APPLIED TENDING TO FORCE THE PIN INTO THE SOCKET.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OVERSIZE PIN EXCLUSION (CONT)	
POSITION STEEL PIN. (CONT)	
PIN DIAMETER (SELECT ONE)	
SINGLE CONTACT SIZE (SELECT ONE)	
(INCH)	2672
(MILLIMETERS)	2674
TWO CONTACT SIZES (SELECT ONE)	
U.S.	
(INCH) *CONTACT (SIZE)	2676 2678
(INCH) *CONTACT (SIZE)	2680 2682
SI	
(MILLIMETERS) *CONTACT (SIZE)	2684 2686
(MILLIMETERS) *CONTACT (SIZE)	2688 2690
CONTACTS TESTED (PERCENT)	2692
OZONE EXPOSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1700

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2672	PIN OUTSIDE DIAMETER SHALL BE 2672 INCH.
2674	PIN OUTSIDE DIAMETER SHALL BE 2674 MILLIMETER(S).
2676 2678	PIN OUTSIDE DIAMETER SHALL BE 2676 INCH FOR SIZE 2678 CONTACTS.
2680 2682	PIN OUTSIDE DIAMETER SHALL BE 2680 INCH FOR SIZE 2682 CONTACTS.
2684 2686	PIN OUTSIDE DIAMETER SHALL BE 2684 MILLIMETER(S) FOR SIZE 2686 CONTACTS.
2688 2690	PIN OUTSIDE DIAMETER SHALL BE 2688 MILLIMETER(S) FOR SIZE 2690 CONTACTS.
2692	TEST SHALL BE PERFORMED ON NOT LESS THAN 2692 PERCENT OF THE SOCKET CONTACTS.
1700	OZONE EXPOSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1700.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OZONE EXPOSURE (CONT)	
REQUIREMENTS (CONT)	
NO CRACKING OF DIELECTRIC OR PERFORMANCE DEGRADATION.	1702
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1694
PER MIL-STD-1344, METHOD 1007.	2694
OZONE CONCENTRATION BY VOLUME	
MINIMUM (PARTS PER MILLION)	2696
MAXIMUM (PARTS PER MILLION)	2698
EXPOSURE DURATION (HOURS)	1696
CHAMBER TEMPERATURE (DEGREES CELSIUS)	2700
TOLERANCE (DEGREES CELSIUS)	2702
PIN CONTACT STABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3142

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1702	OZONE EXPOSURE. THE CONNECTOR SHALL SHOW NO EVIDENCE OF CRACKING OF DIELECTRIC MATERIAL OR OTHER DAMAGE DUE TO OZONE EXPOSURE THAT WILL ADVERSELY AFFECT PERFORMANCE.
1694	OZONE EXPOSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1694.
2694	OZONE EXPOSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1007 OF MIL-STD-1344.
2696	OZONE CONCENTRATION SHALL BE NOT LESS THAN 2696 PARTS PER MILLION BY VOLUME.
2698	OZONE CONCENTRATION SHALL BE NOT GREATER THAN 2698 PARTS PER MILLION BY VOLUME.
1696	EXPOSURE DURATION SHALL BE 1696 HOUR(S).
2700	CHAMBER TEMPERATURE SHALL BE 2700 DEGREES CELSIUS.
2702	CHAMBER TEMPERATURE TOLERANCE SHALL BE 2702 DEGREES CELSIUS.
3142	PIN CONTACT STABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3142.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PIN CONTACT STABILITY (CONT)	
REQUIREMENTS (CONT)	
MAXIMUM DISPLACEMENT (INCH)	3144
MAXIMUM DISPLACEMENT (MILLIMETERS)	2708
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2710
PER DOCUMENT (DOC DES)	2712
GAGE PIN ____	2714
APPLIED LOAD (SELECT ONE)	
(POUNDS)	2716
(NEWTONS)	2718
MAXIMUM LOAD APPLICATION RATE (SELECT ONE)	
(INCHES PER MINUTE)	2720
(MILLIMETERS PER MINUTE)	2722
PLATING ADHESION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1938

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3144	PIN CONTACT STABILITY. THE TOTAL DISPLACEMENT OF THE CONTACT TIP END SHALL BE NOT GREATER THAN 3144 INCH.
2708	PIN CONTACT STABILITY. THE TOTAL DISPLACEMENT OF THE CONTACT TIP END SHALL BE NOT GREATER THAN 2708 MILLIMETER(S).
2710	PIN CONTACT STABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2710.
2712	PIN CONTACT STABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2712.
2714	GAGE PIN SHALL BE 2714.
2716	A LOAD OF 2716 POUND(S) SHALL BE APPLIED.
2718	A LOAD OF 2718 NEWTON(S) SHALL BE APPLIED.
2720	THE RATE OF LOAD APPLICATION SHALL BE NOT GREATER THAN 2720 INCH(S) PER MINUTE.
2722	THE RATE OF LOAD APPLICATION SHALL BE NOT GREATER THAN 2722 MILLIMETER(S) PER MINUTE.
1938	PLATING ADHESION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1938.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PLATING ADHESION (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF FLAKING OR PEELING.	1940
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1932
PER MIL-C-83723.	1934
PROBE DAMAGE (CONTACTS)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3024
MINIMUM CONTACT SEPARATION FORCE (POUNDS)	3026
MINIMUM CONTACT SEPARATION FORCE (NEWTONS)	2704
MEET CONTACT RESISTANCE REQUIREMENTS.	2706
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3010
PER MIL-STD-1344, METHOD 2006.	2724

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1940	PLATING ADHESION. THERE SHALL BE NO EVIDENCE OF PLATING FLAKING OR PEELING.
1932	PLATING ADHESION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1932.
1934	PLATING ADHESION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-83723.
3024	PROBE DAMAGE (CONTACTS). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3024.
3026	PROBE DAMAGE (CONTACTS). THE CONTACT SEPARATION FORCE AFTER TEST SHALL BE NOT LESS THAN 3026 POUND(S).
2704	PROBE DAMAGE (CONTACTS). THE CONTACT SEPARATION FORCE AFTER TEST SHALL BE NOT LESS THAN 2704 NEWTON(S).
2706	CONTACTS SHALL MEET CONTACT RESISTANCE REQUIREMENT(S) AFTER TEST.
3010	PROBE DAMAGE (CONTACTS). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3010.
2724	PROBE DAMAGE (CONTACTS). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2006 OF MIL-STD-1344.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PROBE DAMAGE (CONTACTS) (CONT)	
PER MIL-STD-1344, METHOD 2006. (CONT)	
HOLDING DEVICE (SELECT ONE)	
COLLET.	3021
CONNECTOR.	3020
PROBE DEPTH (SELECT ONE)	
ONE HALF SOCKET BORE.	2726
THREE QUARTERS SOCKET BORE.	2728
ONE HALF AND THREE QUARTERS SOCKET BORE.	3018
SOCKETS TESTED (QUANTITY)	3012
RFI SHIELDING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1832
PER RFI SHIELDING TABLE.	1834

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3021	COLLET TYPE CONTACT HOLDING DEVICE SHALL BE USED.
3020	A CONNECTOR SHALL BE USED TO RETAIN THE SOCKET CONTACT(S).
2726	PROBE DEPTH SHALL BE ONE HALF OF SOCKET BORE NOMINAL DEPTH.
2728	PROBE DEPTH SHALL BE THREE QUARTERS OF SOCKET BORE NOMINAL DEPTH.
3018	PROBE DEPTHS SHALL BE ONE HALF AND THREE QUARTERS OF SOCKET BORE NOMINAL DEPTH.
3012	THERE SHALL BE 3012 SOCKETS TESTED.
1832	RFI SHIELDING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1832.
1834	RFI SHIELDING. THE REQUIREMENT(S) SHALL BE AS SPECIFIED IN THE RFI SHIELDING TABLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RFI SHIELDING (CONT)	
PER RFI SHIELDING TABLE. (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1826
PER DOCUMENT (DOC DES)	1829
FREQUENCIES PER RFI SHIELDING TABLE.	1836

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

RFI SHIELDING TABLE

TEST FREQUENCY MEGAHERTZ	MINIMUM LEAKAGE ATTENUATION (DB)
2737	2738
2739	2740
2741	2742
2743	2744
2745	2746
2747	2748
2749	2750
2751	2752
2753	2754
2755	2756
2757	2758
2759	2760
2761	2762
2763	2764
2765	2766

1826 RFI SHIELDING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1826.

1829 RFI SHIELDING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1829.

1836 TEST FREQUENCY(S) SHALL BE AS SHOWN IN THE RFI SHIELDING TABLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RFI SPRING FINGER FORCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2730
AS FOLLOWS:	2731
MAXIMUM FORCE (SELECT ONE)	
(POUNDS)	2732
(NEWTONS)	2733
MINIMUM FORCE (SELECT ONE)	
(POUNDS)	2734
(NEWTONS)	2735
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2768
PER DOCUMENT (DOC DES)	2770
SALT SPRAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4878

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2730	RFI SPRING FINGER FORCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2730.
2731	RFI SPRING FINGER FORCE. THE PLUG AND RECEPTACLE AXIAL MATING FORCE SHALL BE AS FOLLOWS:
2732	THE FORCE SHALL BE NOT GREATER THAN 2732 POUND(S).
2733	THE FORCE SHALL BE NOT GREATER THAN 2733 NEWTON(S).
2734	THE FORCE SHALL BE NOT LESS THAN 2734 POUND(S).
2735	THE FORCE SHALL BE NOT LESS THAN 2735 NEWTON(S).
2768	RFI SPRING FINGER FORCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2768.
2770	RFI SPRING FINGER FORCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2770.
4878	SALT SPRAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4878.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT SPRAY (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF EXCESSIVE CORROSION, WARPING OR CRACKING.	2772
NO INCREASE IN FORCE TO ENGAGE AND DISENGAGE.	2774
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4770
PER MIL-STD-1344, METHOD 1001.	2776
*TEST CONDITION (LETTER)	4772
MOUNTING (SELECT ONE)	
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4773
MOUNTING SHALL BE BY NORMAL METHOD.	4765
MOUNTING SHALL BE BY ANY SUITABLE METHOD.	4766

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2772	SALT SPRAY. THERE SHALL BE NO EVIDENCE OF EXCESSIVE CORROSION. EXCESSIVE CORROSION IS DEFINED AS THAT WHICH INTERFERES WITH THE ELECTRICAL OR MECHANICAL PERFORMANCE, OR, IN THE CASE OF PLATED METAL, CORROSION WHICH HAS PASSED THROUGH THE PLATING AND ATTACKED THE BASE METAL. THERE SHALL BE NO WARPING, CRACKING OR OTHER DAMAGE.
2774	THERE SHALL BE NO INCREASE IN FORCE REQUIRED TO ENGAGE AND DISENGAGE MATING CONNECTORS.
4770	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4770.
2776	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1001 OF MIL-STD-1344.
4772	TEST CONDITION LETTER 4772 SHALL APPLY.
4773	MOUNTING SHALL BE IN ACCORDANCE WITH 4773.
4765	MOUNTING SHALL BE BY THE NORMAL METHOD.
4766	MOUNTING SHALL BE BY ANY SUITABLE METHOD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHELL TO SHELL CONDUCTIVITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1820
AS FOLLOWS:	2778
MAXIMUM RESISTANCE (OHMS)	2780
MAXIMUM VOLTAGE DROP (MILLIVOLTS)	1822
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1812
PER DOCUMENT (DOC DES)	2782
APPLIED CURRENT (AMPERES)	1814
CURRENT TOLERANCE (AMPERES)	2784
SIMULATED LIFE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1974
AS FOLLOWS:	2786

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1820	SHELL TO SHELL CONDUCTIVITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1820.
2778	SHELL TO SHELL CONDUCTIVITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2780	THE MEASURED RESISTANCE SHALL BE NOT GREATER THAN 2780 OHM(S).
1822	THE MEASURED VOLTAGE DROP SHALL BE NOT GREATER THAN 1822 MILLIVOLT(S).
1812	SHELL TO SHELL CONDUCTIVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1812.
2782	SHELL TO SHELL CONDUCTIVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2782.
1814	APPLIED CURRENT SHALL BE 1814 AMPERE(S).
2784	CURRENT TOLERANCE SHALL BE 2784 AMPERE(S).
1974	SIMULATED LIFE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1974.
2786	SIMULATED LIFE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SIMULATED LIFE (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM MILLIVOLT DROP (MILLIVOLTS)	2788
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2790
NO DIELECTRIC BREAKDOWN.	2792
MEET MATING AND UNMATING FORCE REQUIREMENTS.	2794
MAXIMUM DISCONTINUITY (MICROSECONDS)	2796
NO EVIDENCE OF PHYSICAL DAMAGE.	2798
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1968
PER MIL-STD-1344, METHOD 1015.	1970
TEST CONDITION LETTER (SELECT ONE)	
TEST CONDITION LETTER A.	2800
TEMPERATURE LIMIT (ROMAN NUMERAL)	2802
TEST CONDITION LETTER B.	2804
VIBRATION (DOC DES)	2806

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2788	THE CONTACT RESISTANCE (MILLIVOLT DROP) SHALL BE NOT GREATER THAN 2788 MILLIVOLT(S) AFTER TEST.
2790	THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 2790 MEGOHM(S) AFTER TEST.
2792	THERE SHALL BE NO EVIDENCE OF FLASHOVER OR DIELECTRIC BREAKDOWN AFTER TEST.
2794	CONNECTORS SHALL MEET MATING AND UNMATING FORCE REQUIREMENTS AFTER TEST.
2796	DISCONTINUITY SHALL BE NOT GREATER THAN 2796 MICROSECOND(S) DURING TEST.
2798	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1968	SIMULATED LIFE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1968.
1970	SIMULATED LIFE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1015 OF MIL-STD-1344.
2800	TEST CONDITION A SHALL APPLY.
2802	TEMPERATURE LIMIT 2802 SHALL APPLY FOR GROUP II SAMPLE.
2804	TEST CONDITION B SHALL APPLY.
2806	VIBRATION SHALL BE IN ACCORDANCE WITH 2806.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SIMULATED LIFE (CONT)	
TEST CONDITION LETTER (CONT)	
TEST CONDITION LETTER C.	2808
VIBRATION (DOC DES)	2810
TEST CONDITION LETTER D.	2812
TEST CONDITION LETTER E.	2814
PRESSURE LEVEL (ROMAN NUMERAL)	2816
UNIT CYCLES PERFORMED (QUANTITY)	2818
CONDUCTOR (SIZE)	2820
WIRE (TYPE)	2822
ELECTRICAL STRESS (SELECT ONE)	
RATED VOLTAGE AND CURRENT.	2824
(VOLTS DC)	2826
*(AMPERES)	2828
(VOLTS AC)	2830
*(AMPERES)	2832
SHOCK, HIGH IMPACT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1494

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2808	TEST CONDITION C SHALL APPLY.
2810	VIBRATION SHALL BE IN ACCORDANCE WITH 2810.
2812	TEST CONDITION D SHALL APPLY.
2814	TEST CONDITION E SHALL APPLY.
2816	PRESSURE LEVEL 2816 SHALL APPLY.
2818	THERE SHALL BE 2818 UNIT CYCLES PERFORMED.
2820	CONDUCTOR SIZE 2820 SHALL BE USED.
2822	WIRE TYPE 2822 SHALL BE USED.
2824	THE SOURCE AND LOAD SHALL BE SUCH THAT RATED VOLTAGE AND CURRENT SHALL BE APPLIED.
2826 2828	THE SOURCE AND LOAD SHALL BE SUCH THAT 2826 VOLT(S) DC SHALL BE APPLIED AT 2828 AMPERE(S).
2830 2832	THE SOURCE AND LOAD SHALL BE SUCH THAT 2830 VOLT(S) AC SHALL BE APPLIED AT 2832 AMPERE(S).
1494	SHOCK, HIGH IMPACT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1494.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, HIGH IMPACT (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE.	1495
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY DURING TEST.	1451
MAXIMUM DISCONTINUITY (MICROSECONDS)	2834
NO DISENGAGEMENT OR LOOSENING OF COUPLING.	2836
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1486
PER MIL-STD-202, METHOD 207.	1482
*MOUNTING FIXTURE (SELECT ONE)	
FIGURE NUMBER FROM METHOD 207 OF MIL-STD-202 (NUMBER)	1488
ANY SUITABLE MOUNTING FIXTURE.	1478
MOUNTING FIXTURE PER DOCUMENT (DOC DES)	1468

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1495	SHOCK, HIGH IMPACT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1451	THERE SHALL BE NO DISCONTINUITY DURING THE TEST.
2834	THERE SHALL BE NO DISCONTINUITIES GREATER THAN 2834 MICROSECONDS.
2836	THERE SHALL BE NO DISENGAGEMENT OR LOOSENING OF THE CONNECTOR COUPLING.
1486	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1486.
1482	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 207 OF MIL-STD-202.
1488	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH FIGURE 1488 OF METHOD 207 OF MIL-STD-202.
1478	THE MOUNTING FIXTURE SHALL BE ANY SUITABLE MOUNTING FIXTURE.
1468	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH 1468.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, HIGH IMPACT (CONT)	
PER MIL-STD-202, METHOD 207. (CONT)	
SPECIMEN (SELECT ONE)	
WIRED, MATED PAIR.	2838
WIRED, UNMATED CONNECTOR.	2840
MAXIMUM LOAD (MILLIAMPERES)	2842
SHOCK, SPECIFIED PULSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1508
NO EVIDENCE OF PHYSICAL DAMAGE.	1509
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY DURING TEST.	1471
MAXIMUM (MILLISECONDS)	2844
MAXIMUM (MICROSECONDS)	2846
NO DISENGAGEMENT OR LOOSENING OF COUPLING.	2848
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1502

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2838	TEST SPECIMEN SHALL BE A WIRED CONNECTOR MATED PAIR.
2840	TEST SPECIMEN SHALL BE A WIRED UNMATED CONNECTOR.
2842	ELECTRICAL LOAD SHALL BE A CURRENT NOT GREATER THAN 2842 MILLIAMPERE(S).
1508	SHOCK, SPECIFIED PULSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1508.
1509	SHOCK, SPECIFIED PULSE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1471	THERE SHALL BE NO DISCONTINUITY DURING THE TEST.
2844	DISCONTINUITY DURING TEST SHALL BE NOT GREATER THAN 2844 MILLISECOND(S).
2846	DISCONTINUITY DURING TEST SHALL BE NOT GREATER THAN 2846 MICROSECOND(S).
2848	THERE SHALL BE NO DISENGAGEMENT OR LOOSENING OF THE CONNECTOR COUPLING.
1502	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1502.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, SPECIFIED PULSE (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-1344, METHOD 2004.	2850
*TEST CONDITION (LETTER)	1504
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	4686
NORMAL MOUNTING METHOD.	4685
MOUNT PER DOCUMENT (DOC DES)	4684
SPECIMEN (SELECT ONE)	
WIRED, MATED PAIR.	2852
WIRED, UNMATED CONNECTOR.	2854
MAXIMUM LOAD (MILLIAMPERES)	2856
SOLDERABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4674
NO EVIDENCE OF PHYSICAL DAMAGE.	4675
MEET EVALUATION CRITERIA SPECIFIED IN METHOD 208 OF MIL-STD-202.	4672

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2850	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2004 OF MIL-STD-1344.
1504	TEST CONDITION LETTER 1504 SHALL APPLY.
4686	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4685	MOUNTING SHALL BE BY THE NORMAL METHOD.
4684	MOUNTING SHALL BE IN ACCORDANCE WITH 4684.
2852	TEST SPECIMEN SHALL BE A WIRED CONNECTOR MATED PAIR.
2854	TEST SPECIMEN SHALL BE A WIRED UNMATED CONNECTOR.
2856	ELECTRICAL LOAD SHALL BE A CURRENT NOT GREATER THAN 2856 MILLIAMPERE(S).
4674	SOLDERABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4674.
4675	SOLDERABILITY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4672	THE RESULTS OF THE SOLDERABILITY TEST SHALL BE IN ACCORDANCE WITH THE ACCEPTANCE CRITERIA OF METHOD 208 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SOLDERABILITY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4662
PER MIL-STD-202, METHOD 208.	4683
NUMBER OF TERMINALS TO BE TESTED (QUANTITY)	4666
DEPTH OF IMMERSION (SELECT ONE)	
(INCHES)	4667
(MILLIMETERS)	4663
DISTANCE WRAP WIRE APPLIED FROM BODY (SELECT ONE)	
(INCHES)	4664
(MILLIMETERS)	4665
SPECIAL PREPARATIONS PERMITTED.	6205
TEMPERATURE CYCLING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2858

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4662	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4662.
4683	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 208 OF MIL-STD-202.
4666	4666 TERMINATION(S) PER UNIT SHALL BE TESTED.
4667	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4667 INCH(S).
4663	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4663 MILLIMETER(S).
4664	THE WRAP WIRE SHALL BE 4664 INCH(S) FROM THE BODY.
4665	THE WRAP WIRE SHALL BE 4665 MILLIMETER(S) FROM THE BODY.
6205	SPECIAL PREPARATION SHALL BE PERMITTED.
2858	TEMPERATURE CYCLING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2858.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE CYCLING (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF CRACKING OR OTHER DAMAGE.	2860
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	2862
(MILLIVOLTS)	2864
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2866
PER MIL-STD-1344, METHOD 1003.	2868
*TEST CONDITION (LETTER)	4715
NUMBER OF CYCLES (QUANTITY)	2870
STEP 1 TEMPERATURE (DEGREES CELSIUS)	2872
PLUS TOLERANCE (DEGREES CELSIUS)	2874
MINUS TOLERANCE (DEGREES CELSIUS)	2876

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2860	TEMPERATURE CYCLING. THERE SHALL BE NO EVIDENCE OF DAMAGE DETRIMENTAL TO THE OPERATION OF THE CONNECTOR.
2862	THE CONTACT RESISTANCE AFTER TEST SHALL BE NOT GREATER THAN 2862 OHM(S).
2864	THE CONTACT RESISTANCE AFTER TEST SHALL BE NOT GREATER THAN 2864 MILLIVOLT(S) DROP.
2866	TEMPERATURE CYCLING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2866.
2868	TEMPERATURE CYCLING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1003 OF MIL-STD-1344.
4715	TEST CONDITION LETTER 4715 SHALL APPLY.
2870	THE NUMBER OF CYCLES SHALL BE 2870.
2872	THE STEP 1 TEMPERATURE SHALL BE 2872 DEGREES CELSIUS.
2874	THE STEP 1 POSITIVE TEMPERATURE TOLERANCE SHALL BE 2874 DEGREES CELSIUS.
2876	THE STEP 1 NEGATIVE TEMPERATURE TOLERANCE SHALL BE 2876 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE CYCLING (CONT)	
PER MIL-STD-1344, METHOD 1003. (CONT)	
STEP 3 TEMPERATURE (DEGREES CELSIUS)	2878
PLUS TOLERANCE (DEGREES CELSIUS)	2880
MINUS TOLERANCE (DEGREES CELSIUS)	2882
MINIMUM EXPOSURE DURATIONS (SELECT ONE)	
(HOURS)	2884
(MINUTES)	2886
SPECIMEN (SELECT ONE)	
WIRED, MATED PAIR.	2888
WIRED, UNMATED CONNECTOR.	2890
TEMPERATURE LIFE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3082
NO CRACKING, FRACTURE OR OTHER DAMAGE.	2892

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2878	THE STEP 3 TEMPERATURE SHALL BE 2878 DEGREES CELSIUS.
2880	THE STEP 3 POSITIVE TEMPERATURE TOLERANCE SHALL BE 2880 DEGREES CELSIUS.
2882	THE STEP 3 NEGATIVE TEMPERATURE TOLERANCE SHALL BE 2882 DEGREES CELSIUS.
2884	THE STEPS 1 AND 3 EXPOSURE DURATIONS SHALL BE NOT LESS THAN 2884 HOUR(S).
2886	THE STEPS 1 AND 3 EXPOSURE DURATIONS SHALL BE NOT LESS THAN 2886 MINUTE(S).
2888	TEST SPECIMEN SHALL BE A WIRED CONNECTOR MATED PAIR.
2890	TEST SPECIMEN SHALL BE A WIRED UNMATED CONNECTOR.
3082	TEMPERATURE LIFE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3082.
2892	TEMPERATURE LIFE. THERE SHALL BE NO EVIDENCE OF CRACKING, FRACTURE, OR OTHER DAMAGE DETRIMENTAL TO THE OPERATION OF THE CONNECTOR.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE LIFE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3058
PER MIL-STD-1344, METHOD 1005.	2894
TEST CONDITION (NUMBER)	3060
LENGTH OF TEST CONDITION (LETTER)	3064
ELECTRICAL LOAD ____	3066
CONTACT RETENTION AXIAL LOAD (PERCENT)	3690
SEALING PLUGS (PERCENT OF CONTACTS)	3076
THERMAL SHOCK (HERMETICS)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2896
NO EVIDENCE OF DETRIMENTAL DAMAGE.	2898
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2900
PER DOCUMENT (DOC DES)	2902

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3058	TEMPERATURE LIFE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3058.
2894	TEMPERATURE LIFE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1005 OF MIL-STD-1344.
3060	THE TEST CONDITION NUMBER SHALL BE 3060.
3064	THE LENGTH OF TEST CONDITION SHALL BE 3064.
3066	THE ELECTRICAL LOAD CONDITIONS SHALL BE 3066.
3690	TEST SHALL BE PERFORMED WITH 3690 PERCENT OF THE CONTACT RETENTION AXIAL LOAD APPLIED TO THE CONTACTS.
3076	SEALING PLUGS SHALL BE INSTALLED IN 3076 PERCENT OF CONTACT CAVITIES.
2896	THERMAL SHOCK (HERMETICS). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2896.
2898	THERMAL SHOCK (HERMETICS). THERE SHALL BE NO EVIDENCE OF DAMAGE DETRIMENTAL TO THE OPERATION OF THE CONNECTOR.
2900	THERMAL SHOCK (HERMETICS). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2900.
2902	THERMAL SHOCK (HERMETICS). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2902.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THERMAL SHOCK (HERMETICS) (CONT)	
PER DOCUMENT (CONT)	
DURATION IN COLD BATH (MINUTES)	2904
DURATION IN HOT BATH (MINUTES)	2906
MAXIMUM COLD BATH TEMPERATURE (DEGREES CELSIUS)	2908
MINIMUM HOT BATH TEMPERATURE (DEGREES CELSIUS)	2910
CYCLES OF IMMERSION (QUANTITY)	2911
FORCED AIR DRYING TEMPERATURE (DEGREES CELSIUS)	2912
DRYING DURATION (MINUTES)	2914
VIBRATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4681
NO EVIDENCE OF PHYSICAL DAMAGE.	4682

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2904	THE DURATION OF IMMERSION IN THE COLD BATH SHALL BE 2904 MINUTE(S).
2906	THE DURATION OF IMMERSION IN THE HOT BATH SHALL BE 2906 MINUTE(S).
2908	THE COLD BATH TEMPERATURE SHALL BE NOT GREATER THAN 2908 DEGREES CELSIUS.
2910	THE HOT BATH TEMPERATURE SHALL BE NOT LESS THAN 2910 DEGREES CELSIUS.
2911	THERE SHALL BE 2911 CYCLES OF IMMERSION IN EACH BATH.
2912	FORCED AIR DRYING TEMPERATURE SHALL BE 2912 DEGREES CELSIUS.
2914	THE DRYING DURATION SHALL BE 2914 MINUTE(S).
4681	VIBRATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4681.
4682	VIBRATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY.	1374
MAXIMUM DISCONTINUITY (SELECT ONE)	
(MILLISECONDS)	1545
(MICROSECONDS)	1546
NO LOOSENING OF HARDWARE.	2916
NO UNMATING.	2918
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1505
PER MIL-STD-1344, METHOD 2005.	2920
TEST CONDITION NUMBER I.	2922
DURATION EACH DIRECTION (HOURS)	2924
TEST CONDITION NUMBER II.	2926
TEST CONDITION NUMBER III.	2928

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1374	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1545	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1545 MILLISECOND(S).
1546	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1546 MICROSECOND(S).
2916	THERE SHALL BE NO LOOSENING OF HARDWARE.
2918	THERE SHALL BE NO UNINTENDED UNMATING OF CONNECTORS.
1505	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1505.
2920	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2005 OF MIL-STD-1344.
2922	TEST CONDITION NUMBER I SHALL APPLY.
2924	DURATION OF VIBRATION IN EACH DIRECTION SHALL BE 2924 HOUR(S).
2926	TEST CONDITION NUMBER II SHALL APPLY.
2928	TEST CONDITION NUMBER III SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION (CONT)	
PER MIL-STD-1344, METHOD 2005. (CONT)	
TEST CONDITION NUMBER IV.	2930
TEST CONDITION NUMBER V.	2932
TEST CONDITION (LETTER)	2934
MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	2936
PER DOCUMENT (DOC DES)	2938
DURATION PER AXIS (SELECT ONE)	
3 MINUTES.	2940
15 MINUTES.	2942
1.5 HOURS.	2944
8 HOURS.	2946
DIRECTION OF MOTION (SELECT ONE)	
PERPENDICULAR TO MATING PLANE.	2948
THREE MUTUALLY PERPENDICULAR.	2950

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2930	TEST CONDITION NUMBER IV SHALL APPLY.
2932	TEST CONDITION NUMBER V SHALL APPLY.
2934	TEST CONDITION LETTER 2934 SHALL APPLY.
2936	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
2938	MOUNTING SHALL BE IN ACCORDANCE WITH 2938.
2940	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 3 MINUTES.
2942	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 15 MINUTES.
2944	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 1.5 HOURS.
2946	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 8 HOURS.
2948	THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE MATING PLANE OF THE CONNECTOR(S) IN NORMAL MOUNTING POSITION.
2950	THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUALLY PERPENDICULAR PLANES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION (CONT)	
TEST CONDITION NUMBER V. (CONT)	
NUMBER OF TEST POINTS (QUANTITY)	2952
TEST POINTS ____	2954
TEST CONDITION NUMBER VI.	2956
TEST CONDITION (LETTER)	2958
MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	2960
PER DOCUMENT (DOC DES)	2962
DURATION PER AXIS (SELECT ONE)	
3 MINUTES.	2964
15 MINUTES.	2966
1.5 HOURS.	2968
8 HOURS.	2970
DIRECTION OF MOTION (SELECT ONE)	
PERPENDICULAR TO MATING PLANE.	2972
THREE MUTUALLY PERPENDICULAR.	2974

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2952	THERE SHALL BE 2952 TEST POINT(S).
2954	TEST POINT(S) SHALL BE 2954.
2956	TEST CONDITION NUMBER VI SHALL APPLY.
2958	TEST CONDITION LETTER 2958 SHALL APPLY.
2960	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
2962	MOUNTING SHALL BE IN ACCORDANCE WITH 2962.
2964	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 3 MINUTES.
2966	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 15 MINUTES.
2968	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 1.5 HOURS.
2970	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 8 HOURS.
2972	THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE MATING PLANE OF THE CONNECTOR(S) IN NORMAL MOUNTING POSITION.
2974	THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUALLY PERPENDICULAR PLANES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION (CONT)	
TEST CONDITION NUMBER VI. (CONT)	
NUMBER OF TEST POINTS (QUANTITY)	2976
TEST POINTS ____	2978
SPECIMEN (SELECT ONE)	
WIRED, MATED PAIR.	2980
WIRED, UNMATED CONNECTOR.	2982
ELECTRICAL LOAD (MILLIAMPERES)	2984
MONITOR FOR DISCONTINUITIES.	2986
METHOD FOR DETERMINING RESONANCE ____	2988
WATER PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1618
NO EVIDENCE OF WATER LEAKAGE.	1620
MINIMUM INSULATION RESISTANCE (MEGOHMS)	1621
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1612
PER DOCUMENT (DOC DES)	1614

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2976	THERE SHALL BE 2976 TEST POINT(S).
2978	TEST POINT(S) SHALL BE 2978.
2980	TEST SPECIMEN SHALL BE A WIRED CONNECTOR MATED PAIR.
2982	TEST SPECIMEN SHALL BE A WIRED UNMATED CONNECTOR.
2984	THE ELECTRICAL LOAD, ALL CONTACTS, SHALL BE NOT GREATER THAN 2984 MILLIAMPERE(S).
2986	CONNECTORS SHALL BE MONITORED FOR DISCONTINUITIES.
2988	THE METHOD FOR DETERMINING RESONANCE SHALL BE 2988.
1618	WATER PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1618.
1620	WATER PRESSURE. THE CONNECTOR SHALL SHOW NO EVIDENCE OF WATER LEAKAGE.
1621	THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 1621 MEGOHM(S).
1612	WATER PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1612.
1614	WATER PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1614.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STORAGE CONDITIONS	
(YEARS)	1529
CERTIFY MAXIMUM CURE DATE TO DELIVERY (QUARTERS)	4942
CERTIFY MINIMUM SHELF LIFE AFTER DELIVERY (QUARTERS)	4943
CERTIFY MAXIMUM MANUFACTURE DATE TO DELIVERY (QUARTERS)	4944
AGE LIMITATION PER MIL-STD-1523.	5209
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	STORAGE CONDITIONS.
1529	ITEMS SHALL WITHSTAND 1529 YEARS OF STORAGE WHEN PROPERLY PRESERVED, PACKAGED AND MECHANICALLY PROTECTED WITHOUT REQUIRING MAJOR REPAIR.
4942	MANUFACTURER SHALL CERTIFY THAT THE CURE DATE SHALL BE NOT GREATER THAN 4942 QUARTERS PRIOR TO DELIVERY DATE.
4943	MANUFACTURER SHALL CERTIFY THAT THERE SHALL BE NOT LESS THAN 4943 QUARTERS OF SHELF LIFE AFTER DELIVERY.
4944	MANUFACTURER SHALL CERTIFY THAT THE DATE OF MANUFACTURE SHALL BE NOT GREATER THAN 4944 QUARTERS PRIOR TO DATE OF DELIVERY.
5209	AGE LIMITATIONS OF THE FINISHED PRODUCT SHALL BE IN ACCORDANCE WITH MIL-STD-1523.
	MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI


(Project EDS-A245)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX A


ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

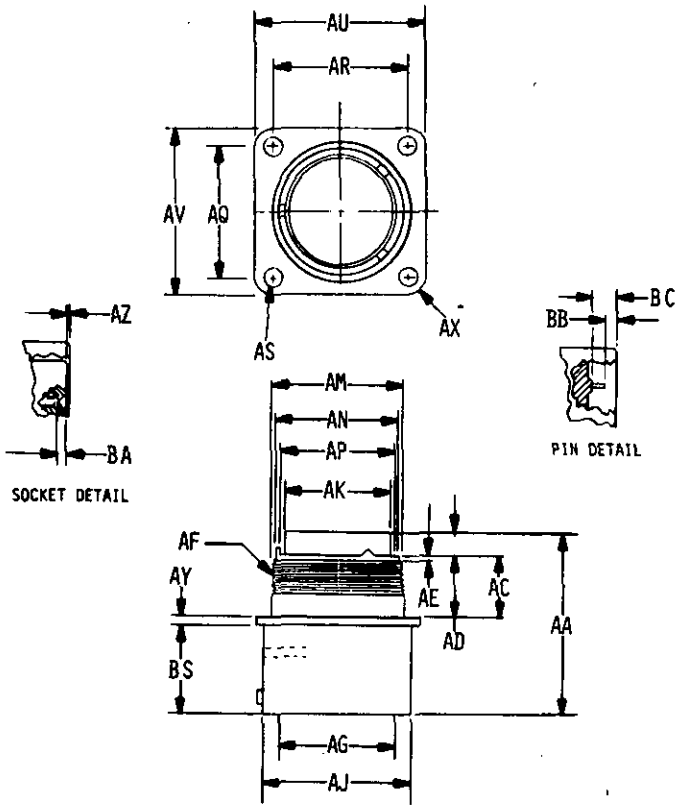


Ø71-Ø1-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

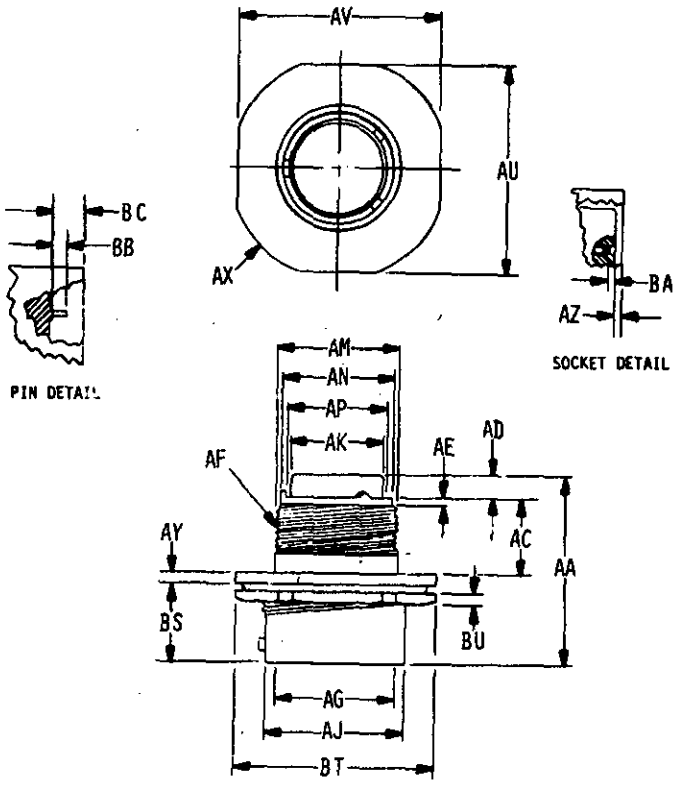


071-01-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

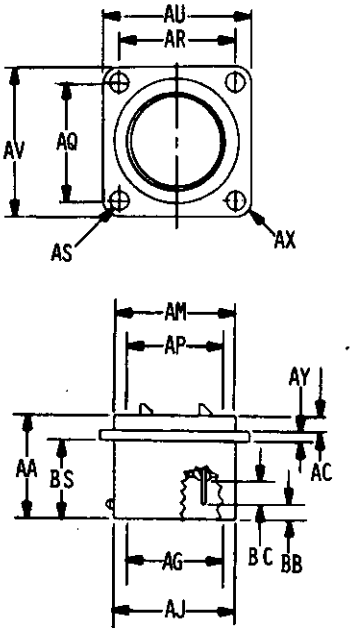


071-01-3

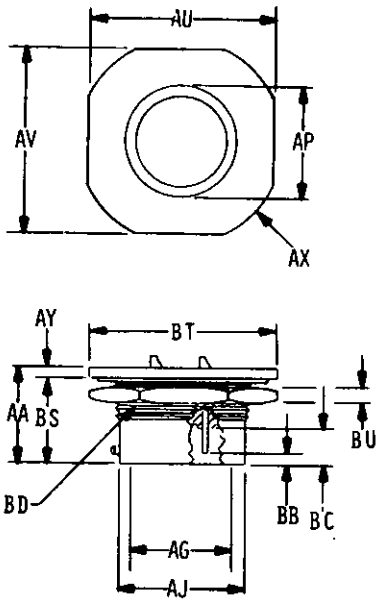


071-01-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

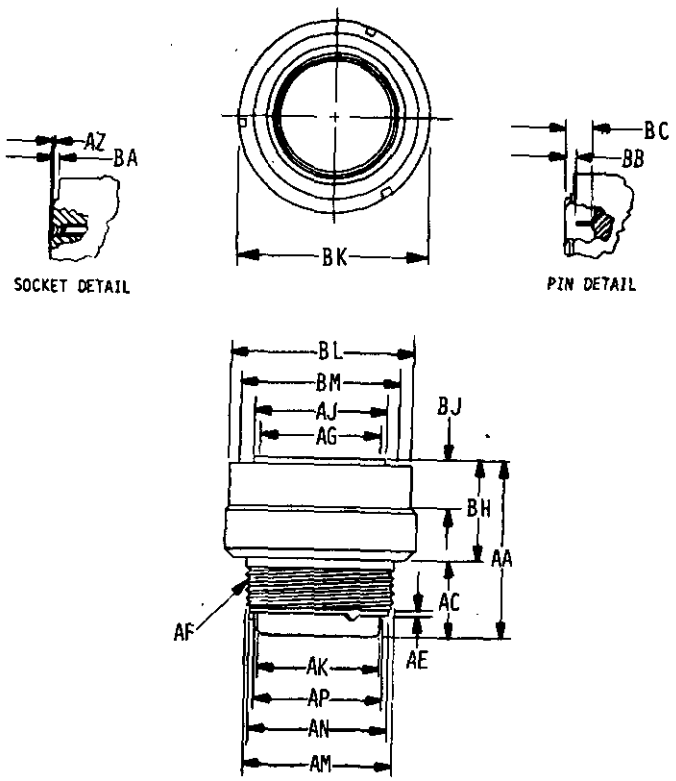


071-01-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

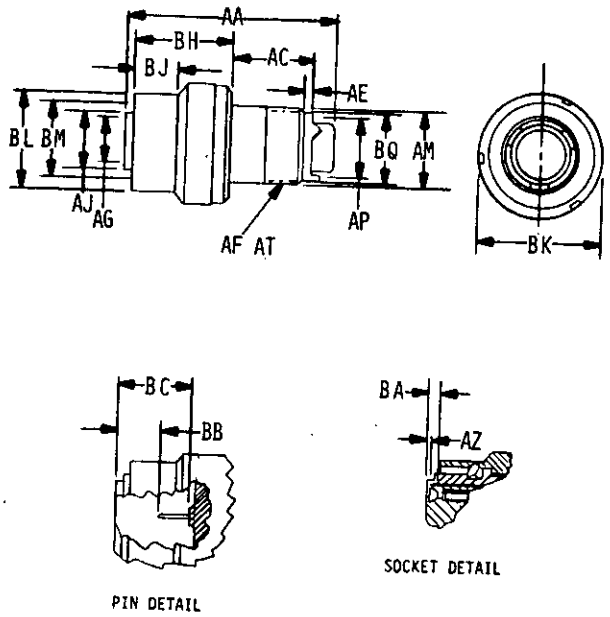


071-01-6

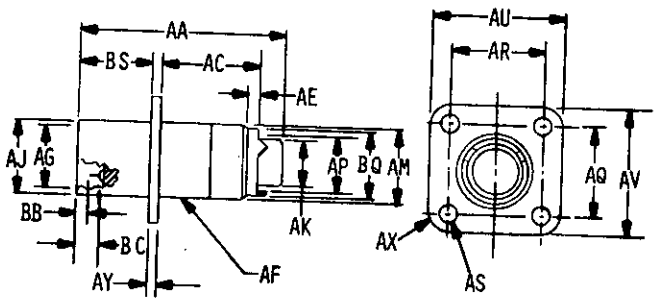


071-01-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

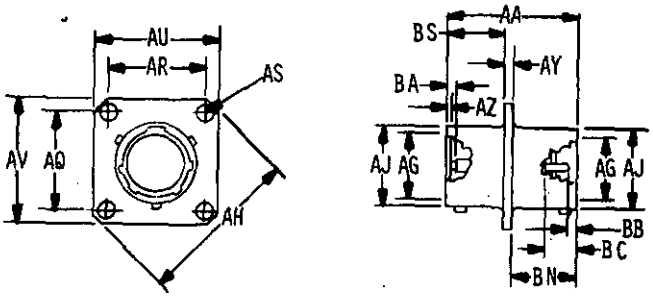


071-01-8

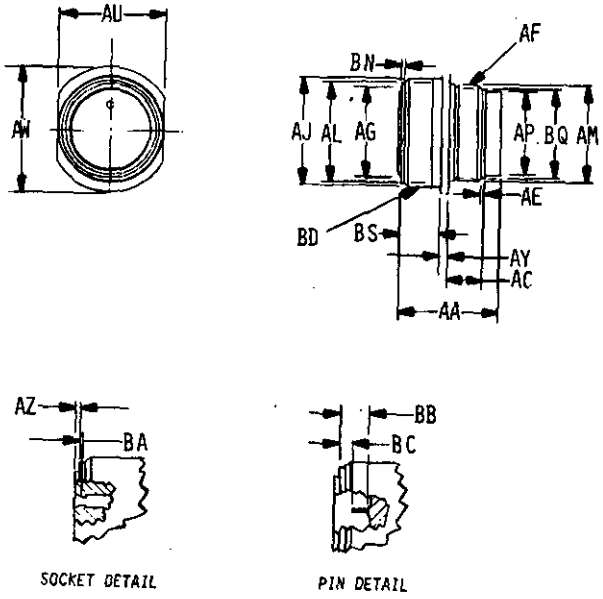


071-01-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

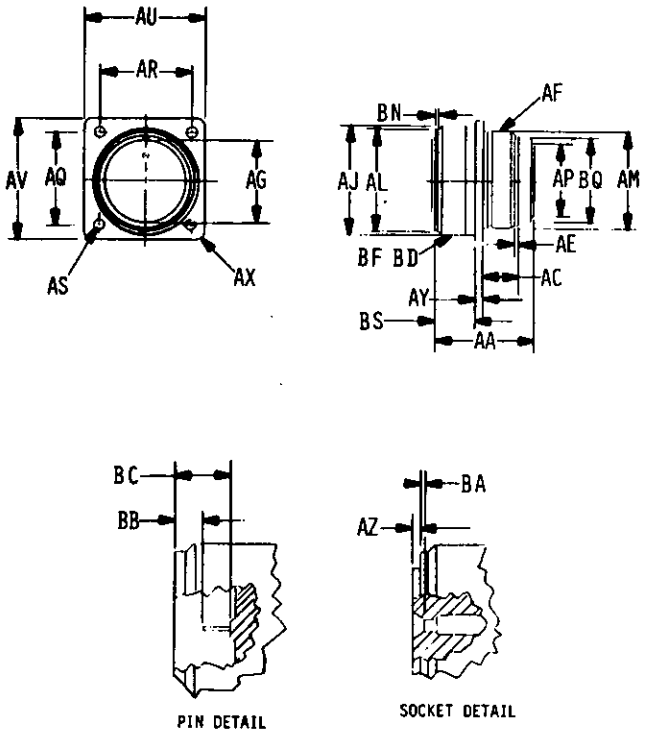


071-01-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

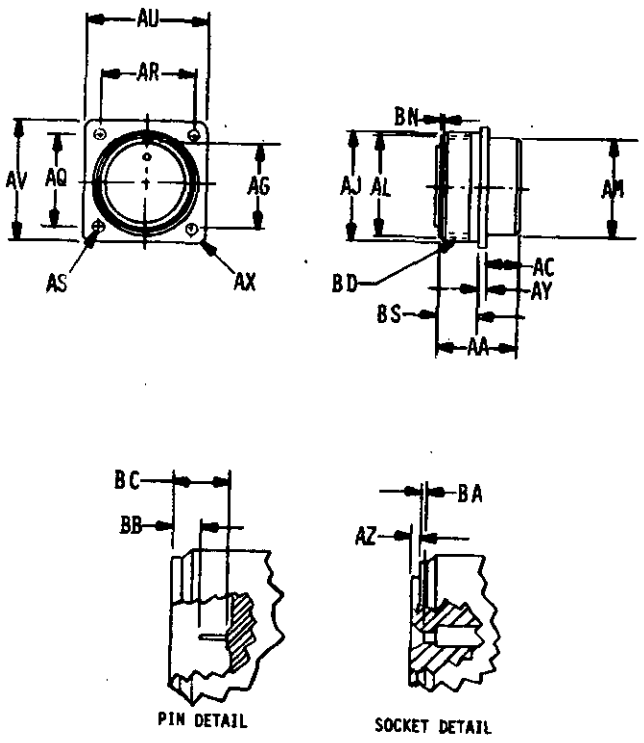


071-01-11

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

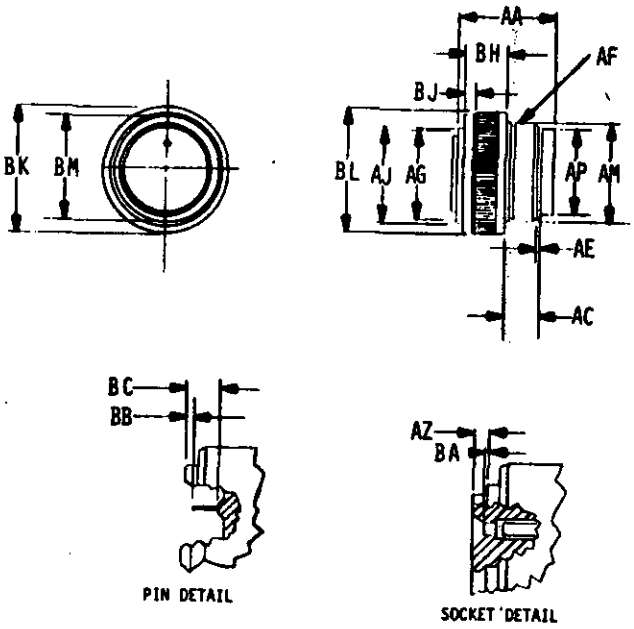


871-01-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

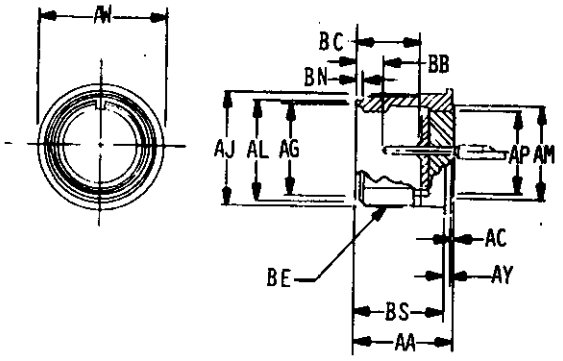


071-01-13

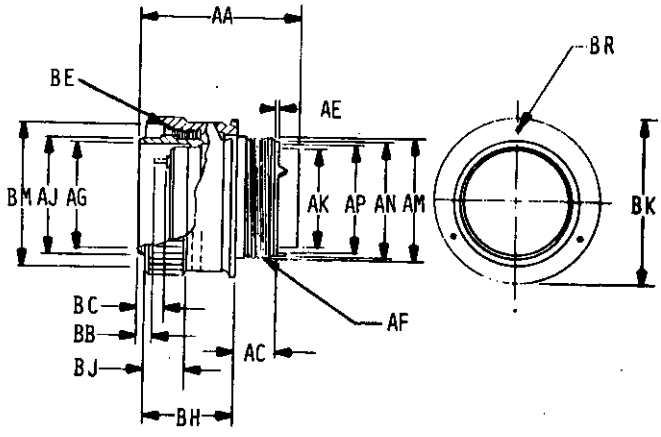


071-01-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

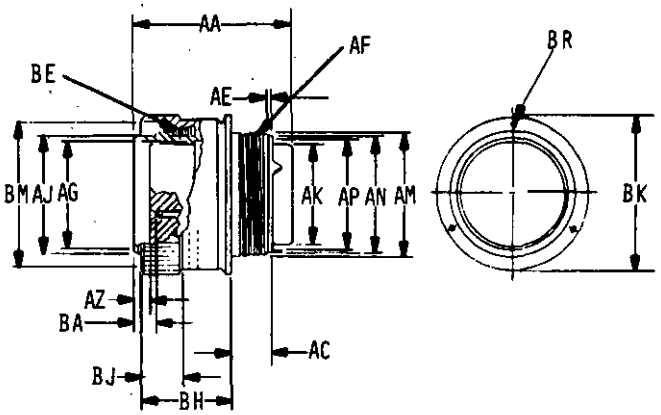


071-01-15

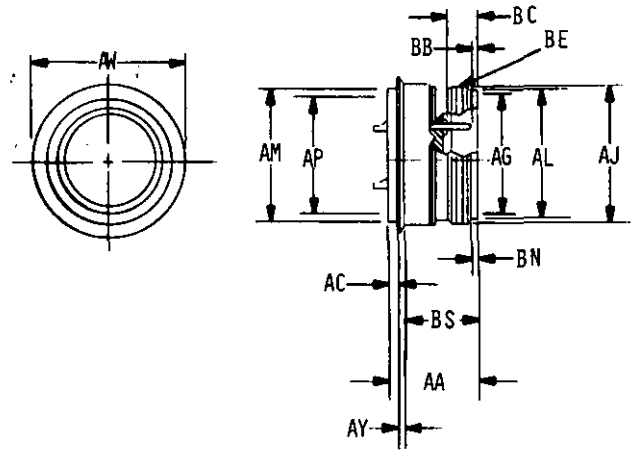


071-01-16

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

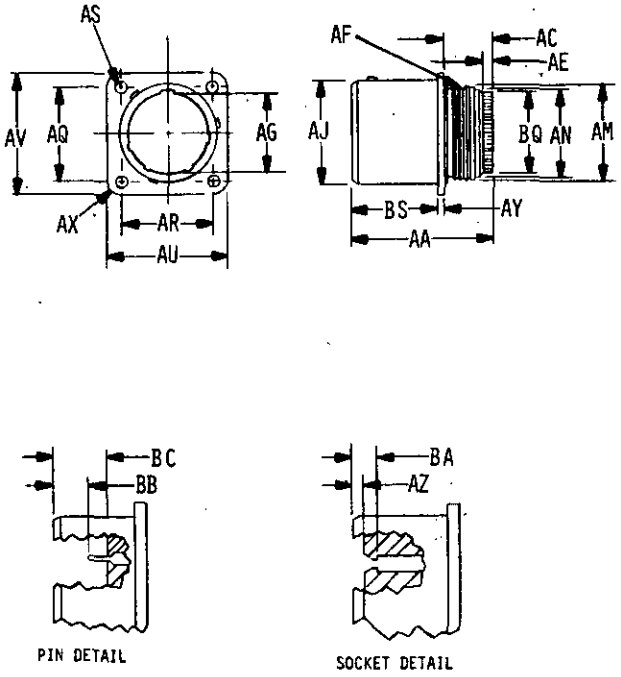


071-01-17

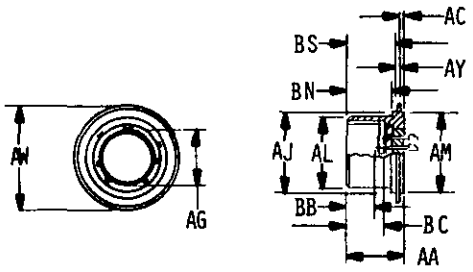


071-01-18

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

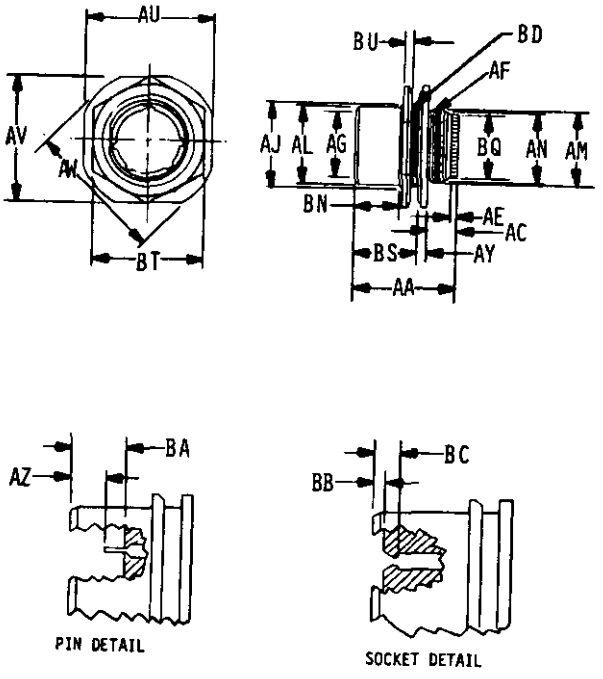


071-01-19

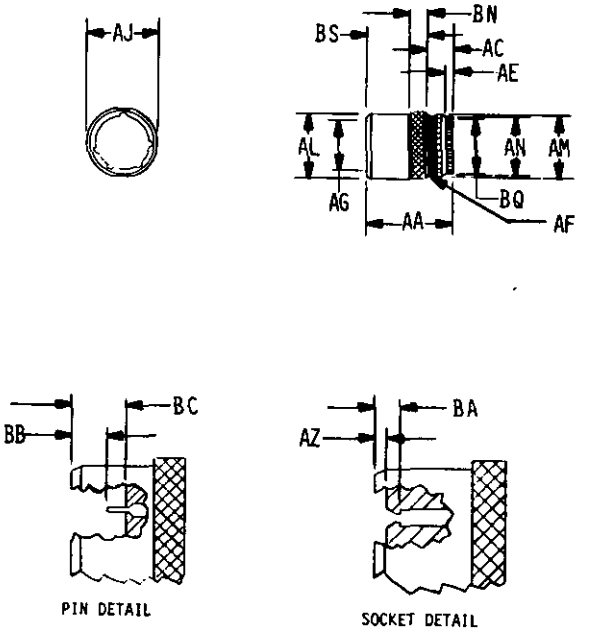


071-01-20

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

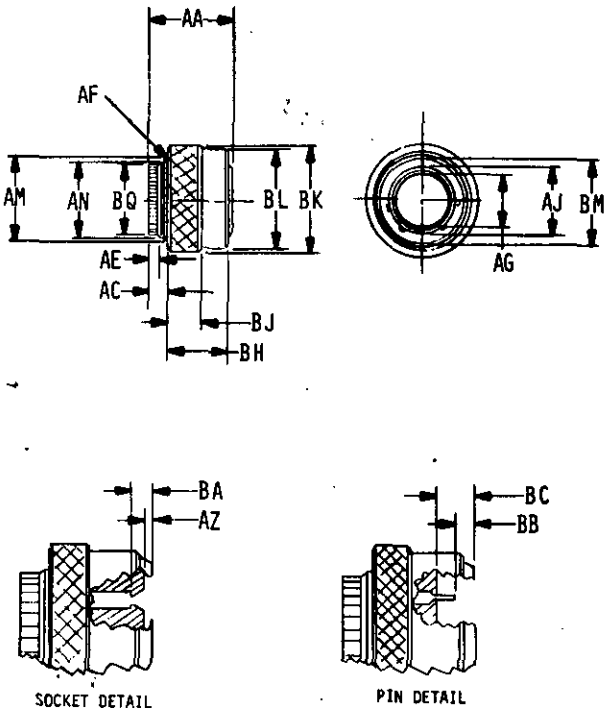



071-01-21

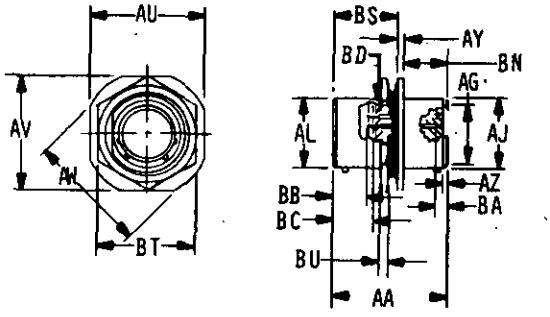


071-01-22


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

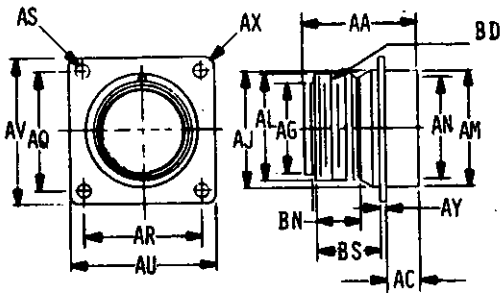

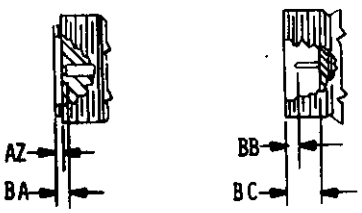


071-01-23

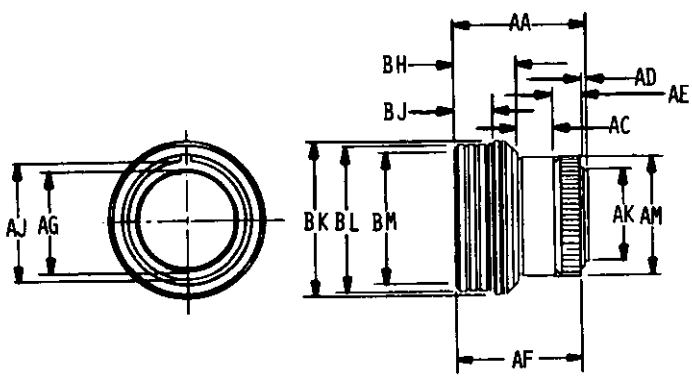

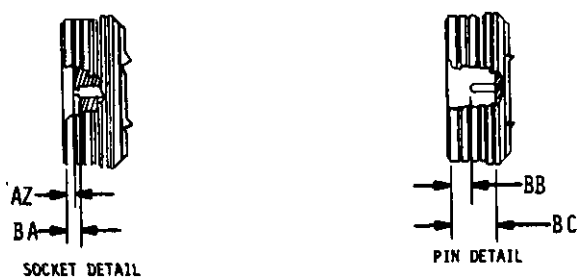


071-01-24

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

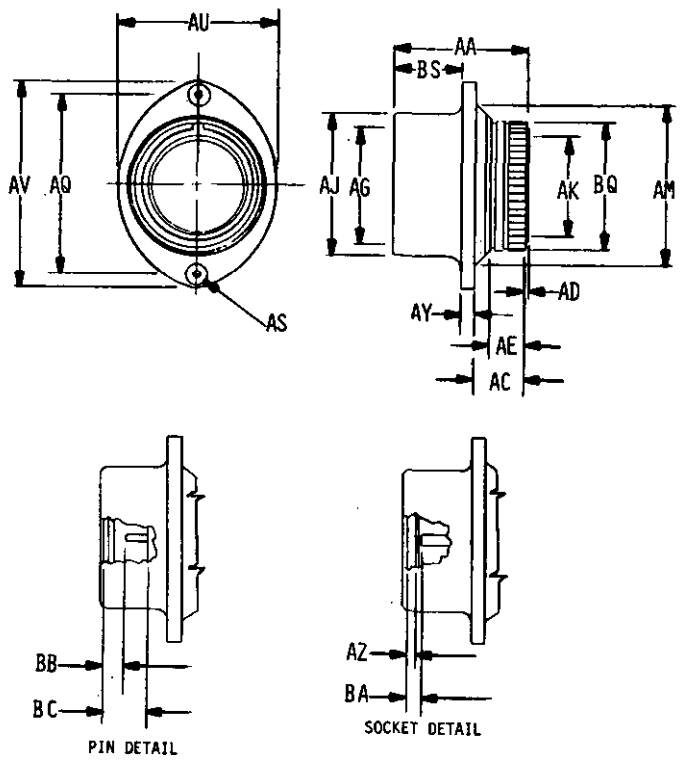


071-01-25

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

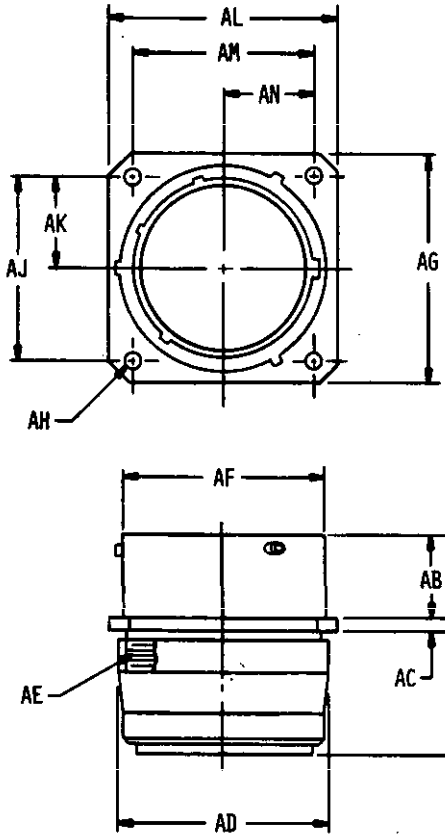


071-01-26

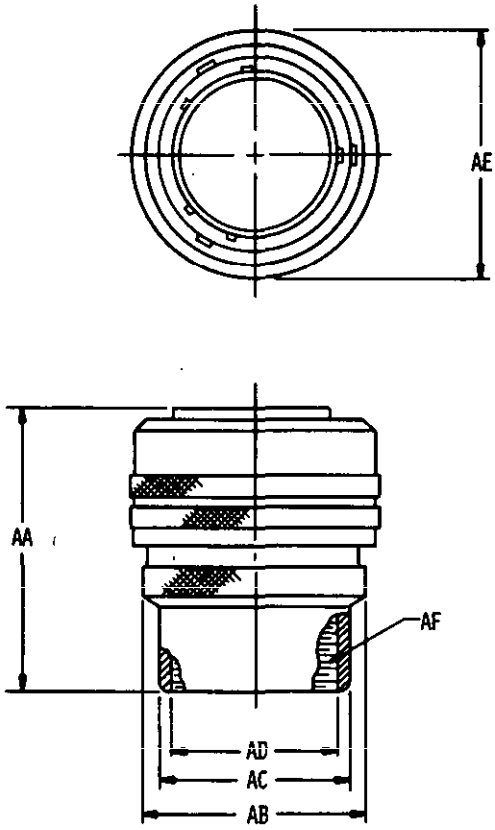



071-01-27

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

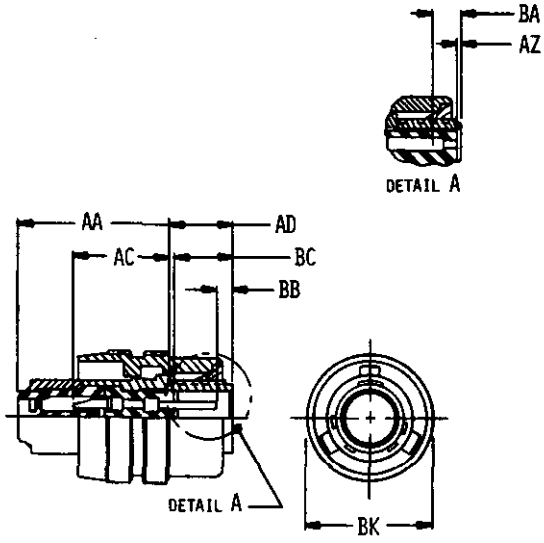


071-01-28



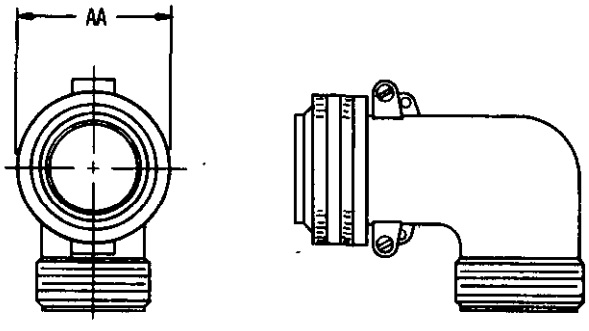


071-01-29




071-01-30


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

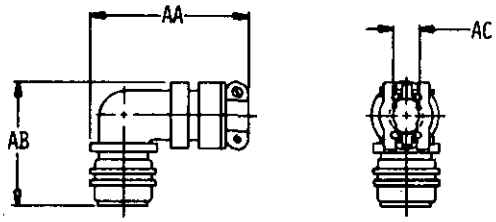

071-01-31

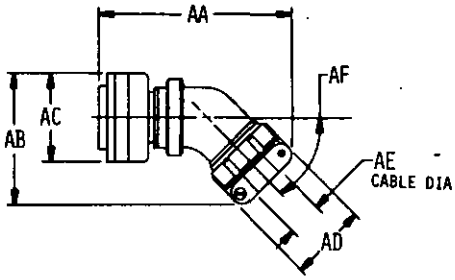


071-01-32

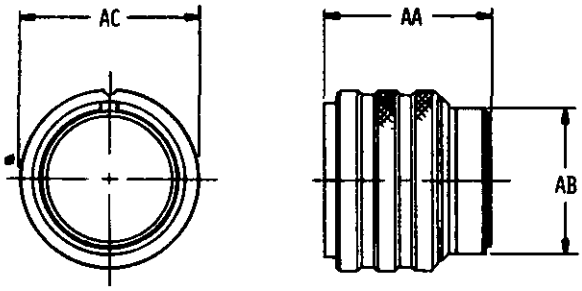


071-01-33


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

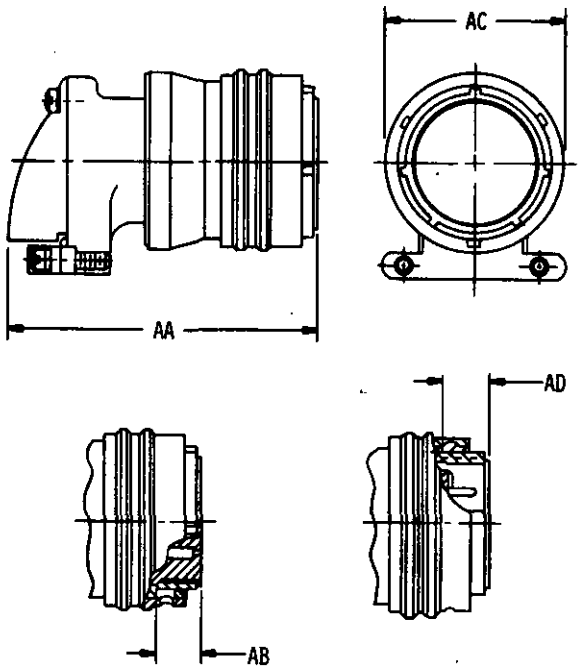



071-01-34

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

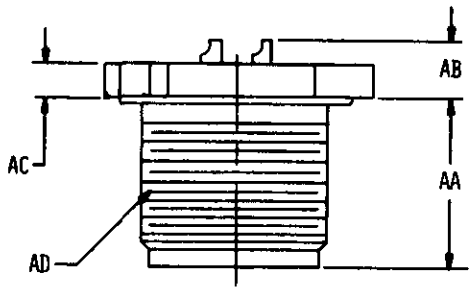

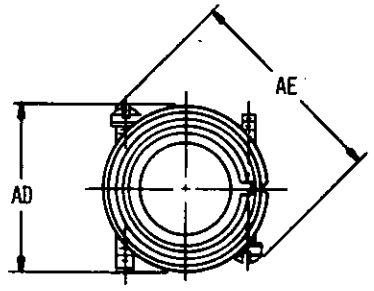


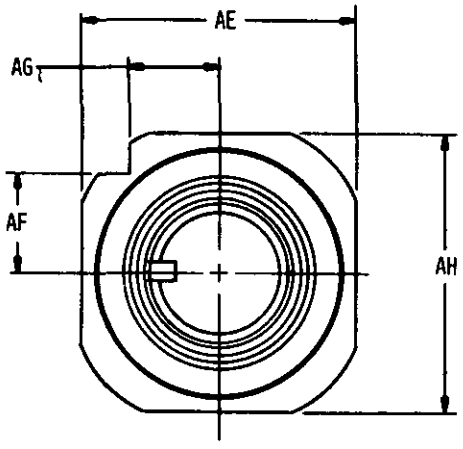

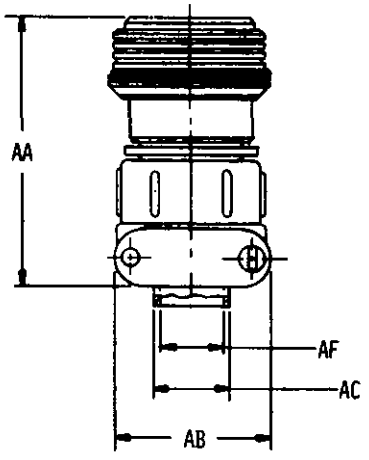


071-01-35


071-01-36

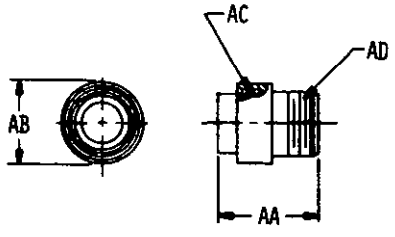


071-01-37


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.





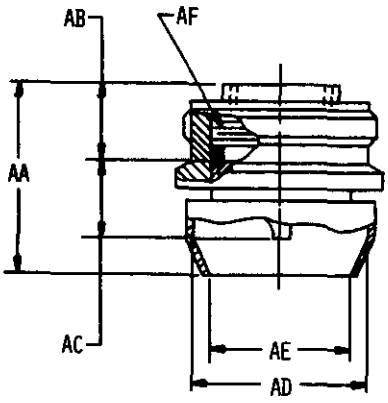


071-01-38

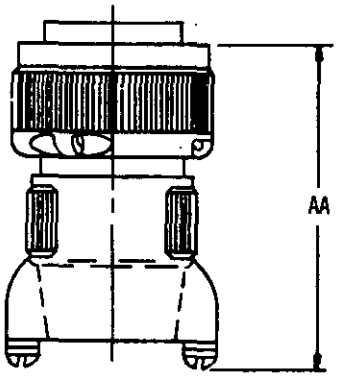


071-01-39


Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

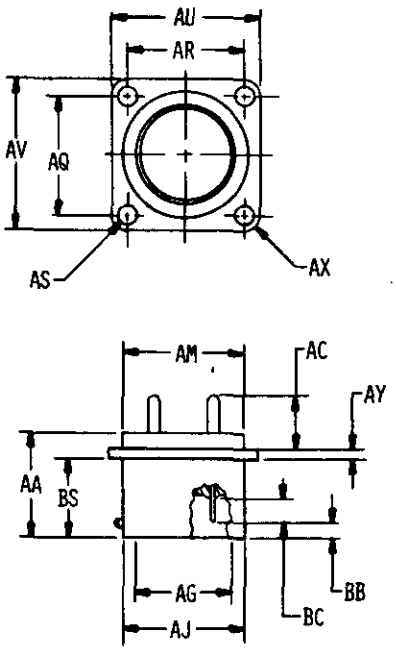

071-01-40

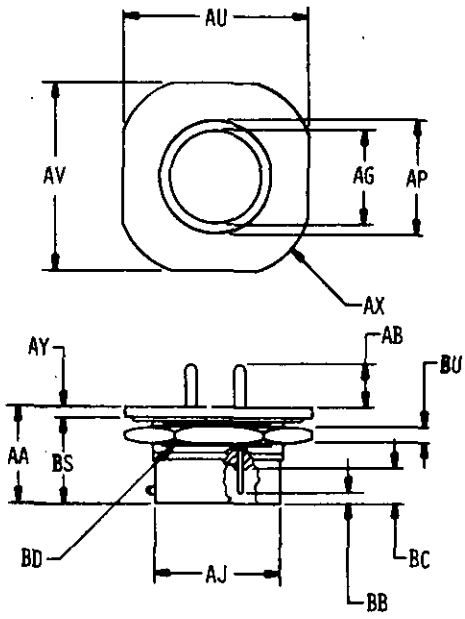


071-01-41

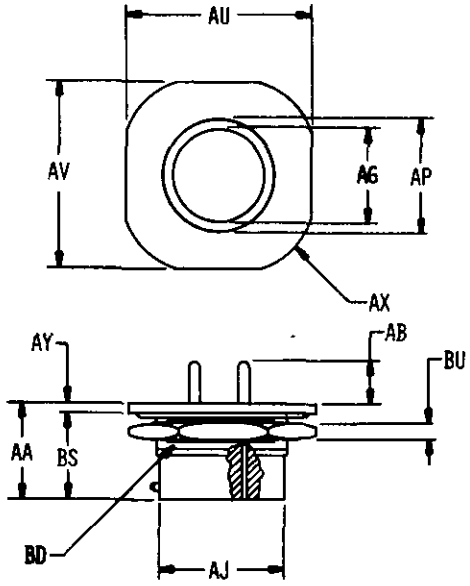


071-01-42

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

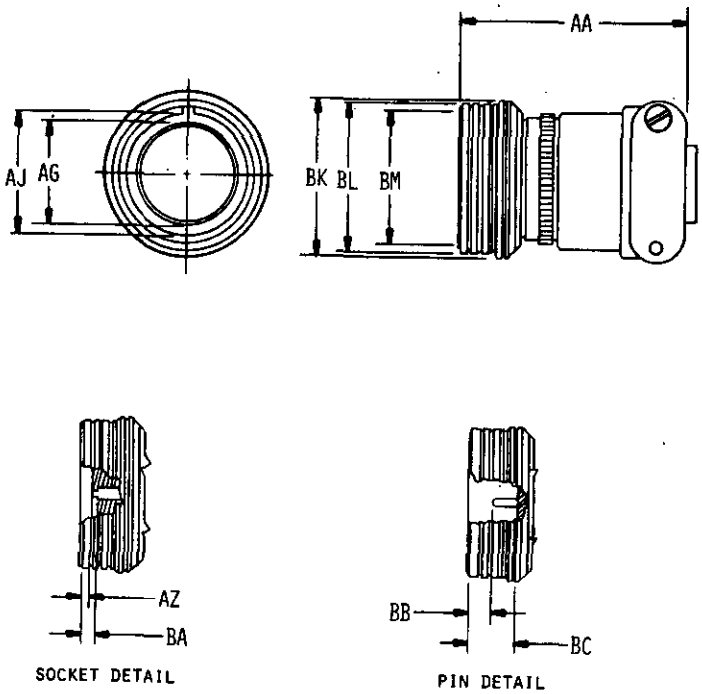


071-01-43

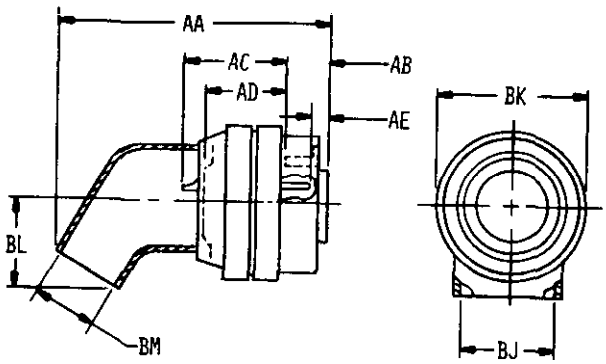


071-01-44


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

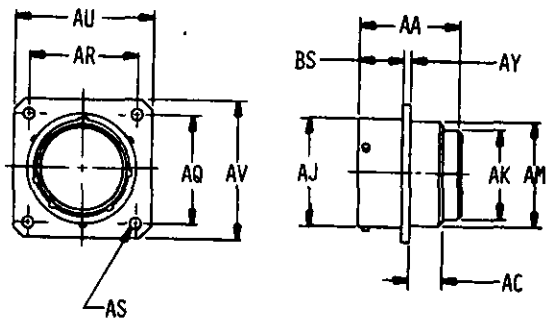

071-01-45

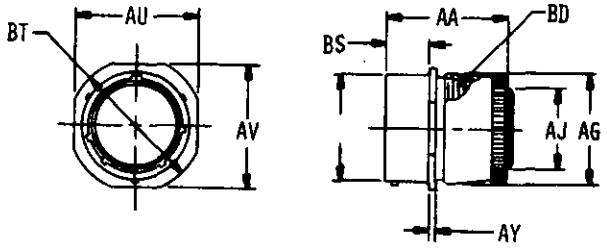


071-01-46

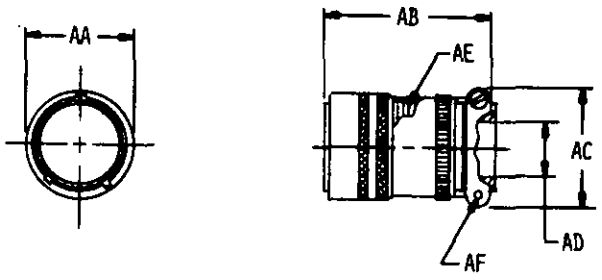


071-01-47

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

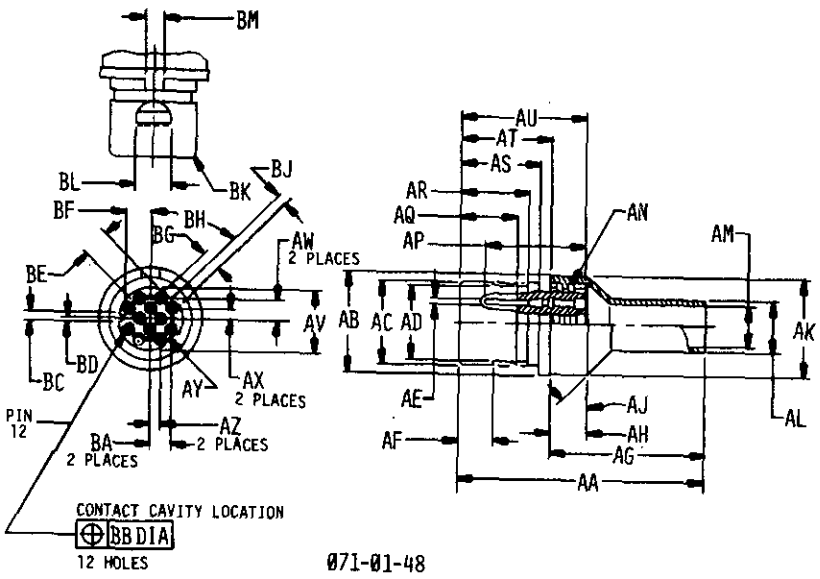


071-01-48

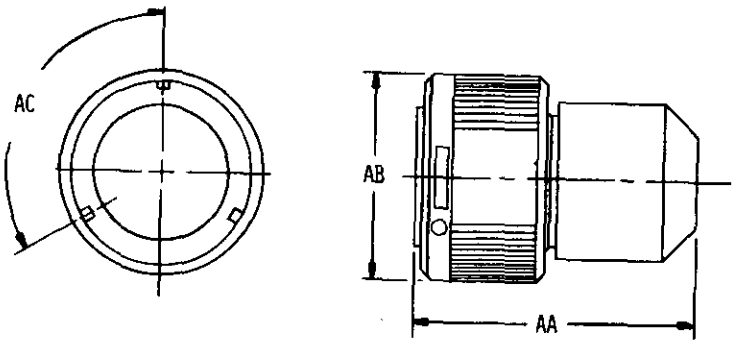


071-01-49


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

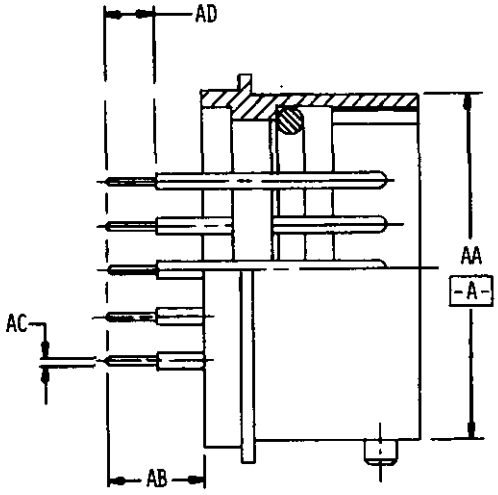

071-01-50

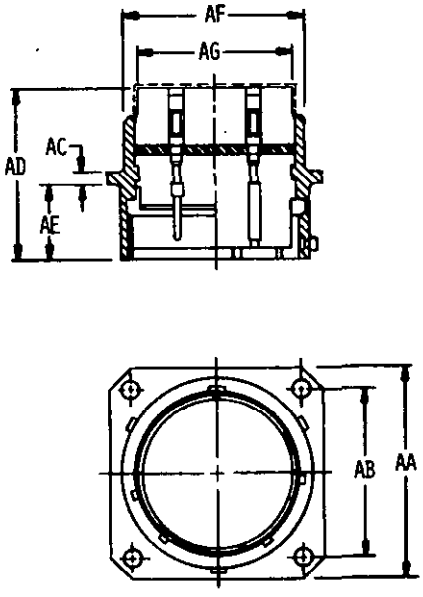


071-01-51

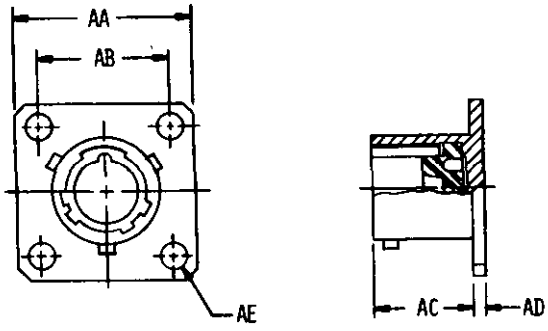


071-01-52


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

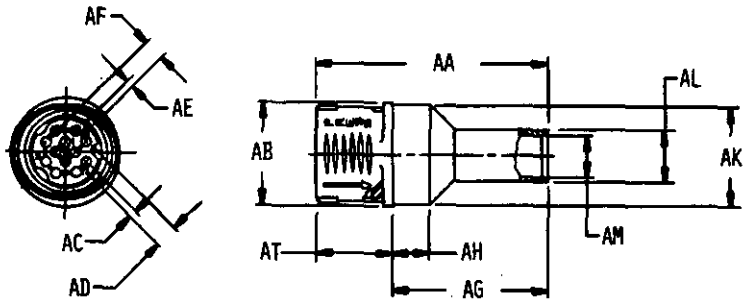

071-01-53

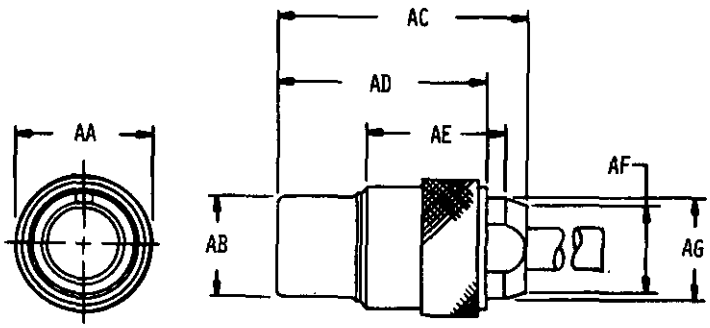


071-01-54

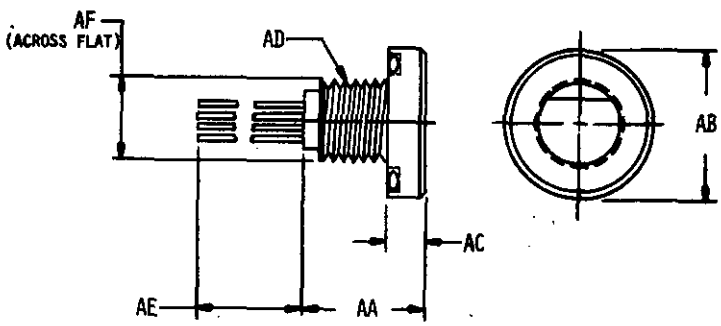


071-01-55

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

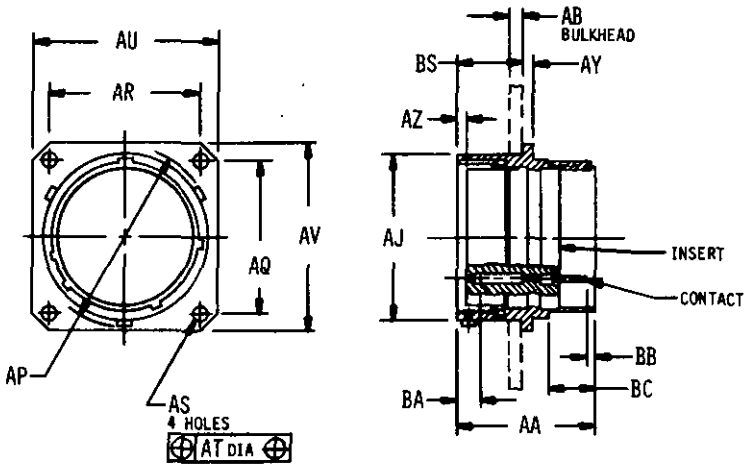


071-01-56

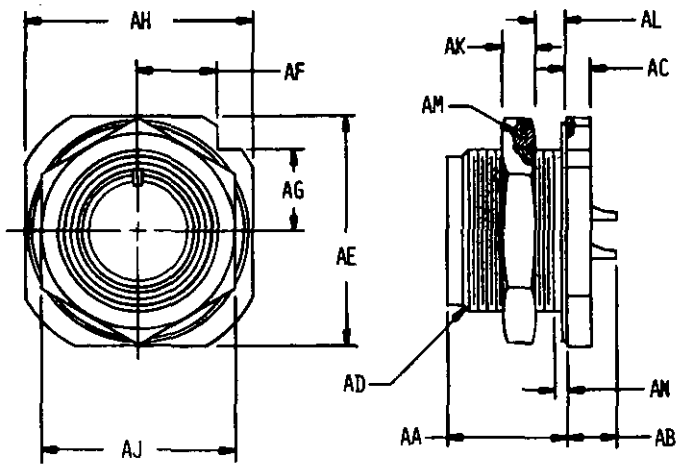


071-01-57

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.







071-01-58

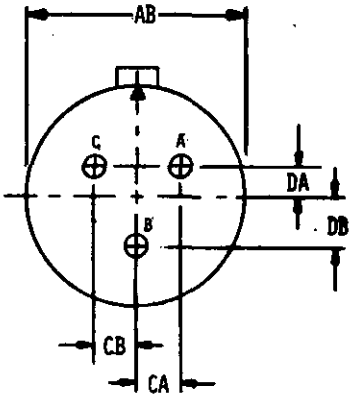

071-02-5

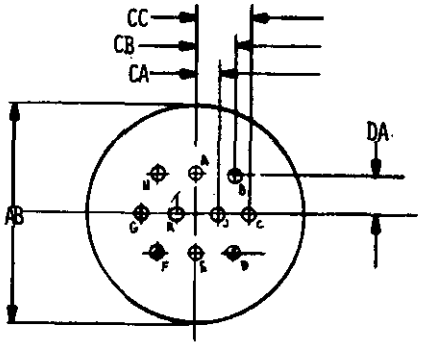


071-02-60

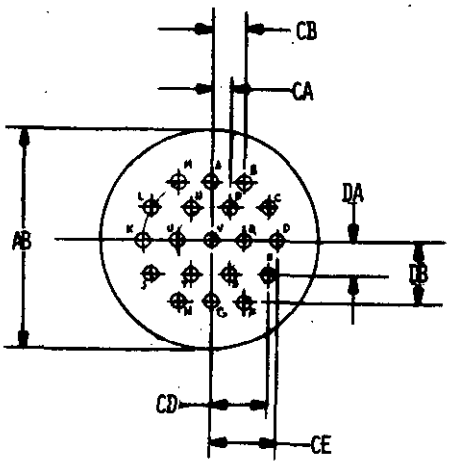


071-02-110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

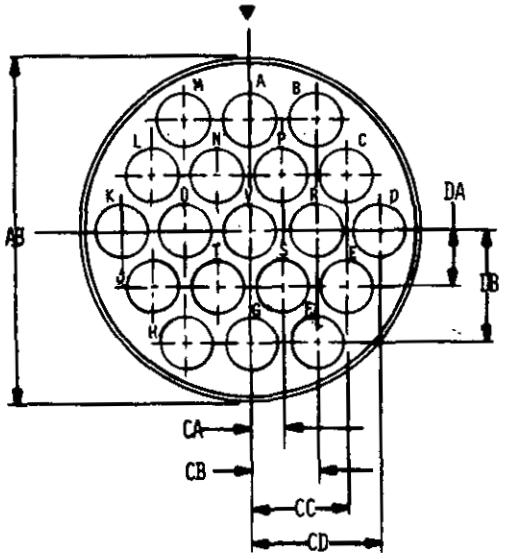


071-02-111

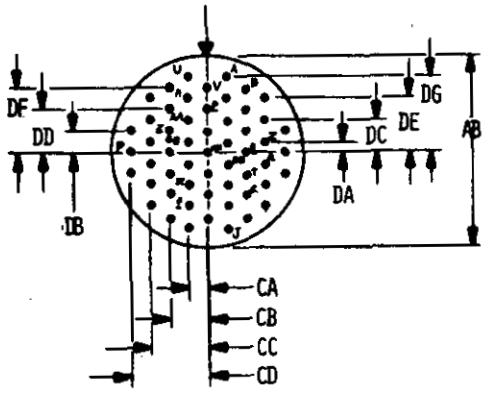

071-02-199


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

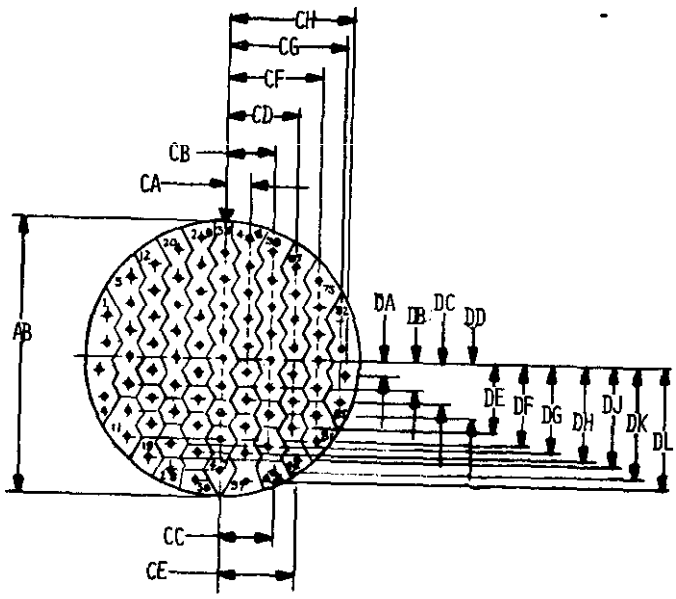


071-02-214



071-02-223

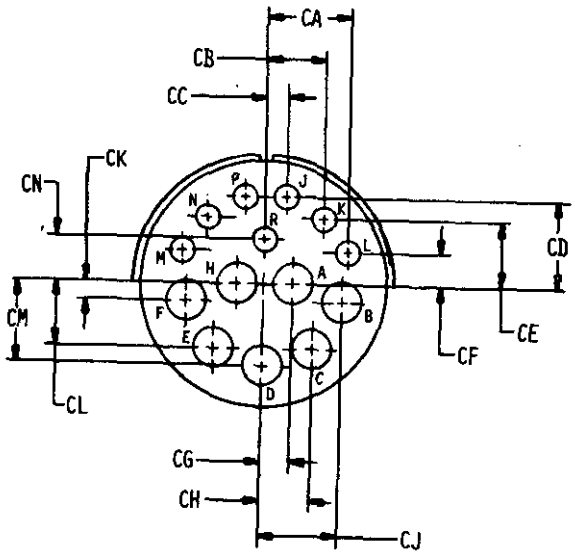


071-02-224




071-02-225


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

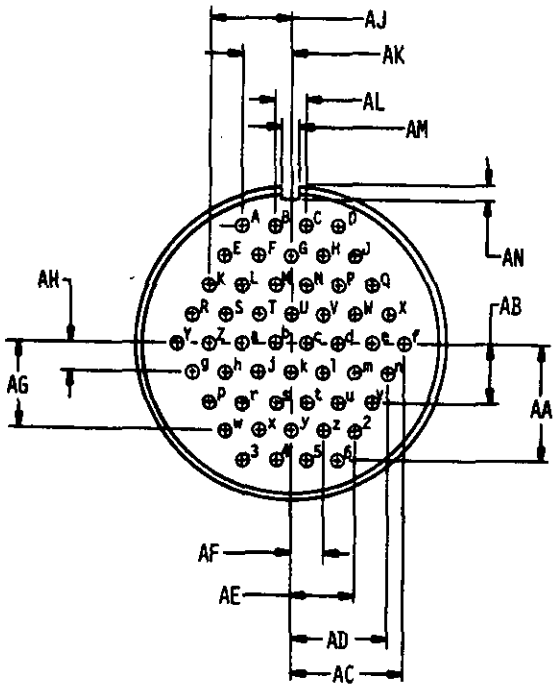

071-02-226



071-02-227



071-02-228

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	18	1505	184	1696	148	1808	70
0102	18	1508	170	1700	146	1812	162
0103	18	1509	170	1702	148	1814	162
0104	18	1520	132	1705	74	1820	162
0105	18	1529	192	1712	72	1822	162
0107	20	1545	184	1714	72	1826	156
0108	20	1546	184	1716	74	1829	156
0700	18	1562	32	1720	126	1832	154
0800	18	1563	32	1722	128	1834	154
1003	18	1568	34	1724	128	1836	156
1004	18	1570	34	1725	128	1840	108
1005	18	1571	34	1726	128	1842	108
1006	18	1572	34	1732	126	1848	106
1008	18	1591	36	1734	126	1850	106
1009	28	1592	36	1738	80	1878	124
1371	130	1600	44	1740	82	1880	126
1372	132	1601	44	1746	78	1882	126
1373	130	1602	40	1748	80	1886	124
1374	184	1603	38	1750	80	1888	124
1376	130	1604	38	1752	80	1892	106
1377	132	1612	190	1756	118	1894	106
1380	128	1614	190	1760	118	1898	104
1381	132	1618	190	1764	118	1900	106
1383	132	1620	190	1768	116	1904	64
1384	130	1621	190	1770	118	1914	64
1386	130	1624	104	1776	112	1916	64
1387	130	1626	104	1778	114	1920	108
1407	130	1628	104	1779	114	1926	108
1451	168	1632	102	1781	114	1928	108
1468	168	1634	104	1782	112	1932	152
1471	170	1640	136	1784	112	1934	152
1477	120	1646	134	1788	90	1938	150
1478	168	1648	134	1790	90	1940	152
1482	168	1652	142	1791	90	1968	164
1486	168	1658	140	1792	90	1970	164
1488	168	1660	140	1794	90	1974	162
1494	166	1662	142	1796	90	1980	84
1495	168	1663	140	1800	70	1990	84
1502	170	1674	142	1802	70	1994	84
1504	172	1694	148	1806	68	2000	82

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2052	134	2155	24	2214	46	2274	66
2054	134	2156	36	2215	52	2276	66
2060	132	2157	24	2216	46	2278	66
2062	134	2158	38	2217	52	2280	68
2066	138	2159	24	2218	46	2282	68
2068	140	2160	38	2219	54	2284	68
2070	140	2161	24	2220	46	2286	68
2078	136	2162	38	2221	54	2288	68
2082	136	2163	24	2222	46	2290	68
2088	86	2164	38	2223	54	2292	68
2090	88	2165	24	2224	46	2294	68
2094	88	2166	38	2225	54	2296	68
2099	88	2170	40	2226	46	2298	68
2100	32	2172	40	2227	54	2300	70
2102	34	2174	40	2228	48	2302	70
2104	34	2176	40	2229	54	2304	70
2106	36	2178	40	2230	48	2306	70
2108	38	2180	40	2231	54	2308	70
2110	40	2182	42	2232	48	2310	72
2114	84	2184	42	2233	56	2312	72
2120	26	2186	42	2234	56	2314	74
2122	26	2188	42	2236	56	2316	74
2124	26	2190	42	2238	56	2318	74
2126	26	2192	42	2240	56	2320	74
2128	26	2194	42	2242	56	2322	74
2130	26	2195	42	2244	56	2324	74
2132	26	2196	42	2246	58	2326	74
2134	26	2197	44	2248	58	2328	74
2136	28	2198	44	2250	58	2330	74
2138	28	2200	44	2252	58	2332	76
2140	28	2202	44	2254	58	2334	76
2142	32	2204	44	2256	58	2336	76
2144	32	2206	44	2258	64	2338	76
2146	32	2207	52	2260	66	2340	76
2148	32	2208	44	2262	66	2342	76
2150	34	2209	52	2264	66	2344	76
2151	24	2210	44	2266	66	2346	76
2152	36	2211	52	2268	66	2348	76
2153	24	2212	46	2270	66	2350	76
2154	36	2213	52	2272	66	2352	78

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2354	78	2420	94	2500	110	2580	124
2356	78	2422	94	2502	110	2582	126
2358	78	2424	94	2504	110	2584	126
2360	78	2426	94	2506	110	2586	128
2362	78	2428	94	2508	110	2588	128
2364	78	2430	94	2510	110	2590	130
2366	80	2432	96	2512	112	2592	132
2368	80	2434	98	2514	112	2594	132
2370	80	2436	98	2516	112	2596	132
2371	82	2438	98	2518	112	2598	132
2372	80	2440	98	2520	112	2600	134
2373	82	2442	98	2522	112	2602	134
2374	82	2444	98	2524	114	2604	134
2375	84	2446	98	2526	114	2606	136
2376	82	2448	98	2528	114	2608	136
2377	84	2450	98	2530	114	2610	136
2378	82	2452	100	2532	114	2612	136
2379	84	2454	102	2534	114	2614	136
2380	82	2456	102	2536	116	2616	136
2381	86	2458	104	2538	118	2618	138
2382	82	2460	104	2540	118	2620	138
2383	86	2462	104	2542	118	2622	138
2384	82	2464	104	2544	118	2624	138
2385	86	2466	106	2546	118	2626	138
2388	86	2468	106	2548	118	2628	138
2390	88	2470	106	2550	122	2630	138
2392	88	2472	106	2552	122	2632	140
2394	88	2474	108	2554	122	2634	140
2396	88	2476	108	2556	122	2636	140
2398	88	2478	108	2558	122	2638	140
2400	88	2480	108	2560	122	2640	140
2402	88	2482	108	2562	122	2642	142
2404	88	2484	108	2564	122	2644	142
2406	88	2486	110	2566	122	2646	142
2408	92	2488	110	2568	122	2648	142
2410	92	2490	110	2570	122	2650	142
2412	92	2492	110	2572	122	2652	142
2414	92	2494	110	2574	124	2654	142
2416	92	2496	110	2576	124	2656	144
2418	92	2498	110	2578	124	2658	144

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2660	144	2735	158	2786	162	2866	176
2662	144	2737	157	2788	164	2868	176
2664	144	2738	157	2790	164	2870	176
2666	144	2739	157	2792	164	2872	176
2668	144	2740	157	2794	164	2874	176
2670	144	2741	157	2796	164	2876	176
2672	146	2742	157	2798	164	2878	178
2674	146	2743	157	2800	164	2880	178
2676	146	2744	157	2802	164	2882	178
2678	146	2745	157	2804	164	2884	178
2680	146	2746	157	2806	164	2886	178
2682	146	2747	157	2808	166	2888	178
2684	146	2748	157	2810	166	2890	178
2686	146	2749	157	2812	166	2892	178
2688	146	2750	157	2814	166	2894	180
2690	146	2751	157	2816	166	2896	180
2692	146	2752	157	2818	166	2898	180
2694	148	2753	157	2820	166	2900	180
2696	148	2754	157	2822	166	2902	180
2698	148	2755	157	2824	166	2904	182
2700	148	2756	157	2826	166	2906	182
2702	148	2757	157	2828	166	2908	182
2704	152	2758	157	2830	166	2910	182
2706	152	2759	157	2832	166	2911	182
2708	150	2760	157	2834	168	2912	182
2710	150	2761	157	2836	168	2914	182
2712	150	2762	157	2838	170	2916	184
2714	150	2763	157	2840	170	2918	184
2716	150	2764	157	2842	170	2920	184
2718	150	2765	157	2844	170	2922	184
2720	150	2766	157	2846	170	2924	184
2722	150	2768	158	2848	170	2926	184
2724	152	2770	158	2850	172	2928	184
2726	154	2772	160	2852	172	2930	186
2728	154	2774	160	2854	172	2932	186
2730	158	2776	160	2856	172	2934	186
2731	158	2778	162	2858	174	2936	186
2732	158	2780	162	2860	176	2938	186
2733	158	2782	162	2862	176	2940	186
2734	158	2784	162	2864	176	2942	186

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2944	186	3034	60	3142	148	4754	116
2946	186	3035	60	3144	150	4755	116
2948	186	3036	60	3198	72	4756	116
2950	186	3037	60	3250	35	4760	114
2952	188	3039	60	3251	35	4761	116
2954	188	3040	60	3252	35	4762	116
2956	188	3042	60	3253	35	4765	160
2958	188	3044	60	3254	35	4766	160
2960	188	3048	58	3255	35	4770	160
2962	188	3049	58	3256	35	4772	160
2964	188	3050	58	3257	35	4773	160
2966	188	3052	58	3258	35	4788	120
2968	188	3054	58	3259	35	4790	122
2970	188	3058	180	3260	35	4793	122
2972	188	3060	180	3261	35	4795	120
2974	188	3064	180	3400	36	4798	120
2976	190	3066	180	3401	36	4799	120
2978	190	3076	180	3403	36	4803	120
2980	190	3082	178	3405	36	4805	120
2982	190	3094	92	3407	36	4813	120
2984	190	3096	92	3408	38	4815	120
2986	190	3098	92	3410	40	4849	96
2988	190	3102	90	3690	180	4850	100
2990	70	3104	90	4662	174	4854	110
2992	72	3105	90	4663	174	4855	100
2994	72	3108	62	4664	174	4856	100
2996	72	3110	62	4665	174	4859	96
3002	84	3116	62	4666	174	4861	100
3004	86	3118	62	4667	174	4867	100
3006	86	3120	62	4672	172	4869	102
3010	152	3122	62	4674	172	4870	102
3012	154	3124	62	4675	172	4874	98
3018	154	3126	62	4681	182	4875	100
3020	154	3128	62	4682	182	4878	158
3021	154	3130	64	4683	174	4884	96
3024	152	3132	64	4684	172	4885	96
3026	152	3134	64	4685	172	4891	96
3030	60	3136	64	4686	172	4894	94
3031	60	3138	128	4715	176	4897	102
3033	60	3140	126	4717	102	4900	96

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4902	96	6798	50				
4906	94	6799	50				
4908	94	6801	50				
4942	192	6803	50				
4943	192	6870	192				
4944	192	6873	18				
4950	30	6874	20				
5000	100	6941	20				
5052	24	6942	20				
5054	22	6991	194				
5060	22	6992	194				
5061	22	6993	194				
5062	22	6994	194				
5063	22	6995	194				
5068	22	7001	192				
5069	22	7002	192				
5070	22	7013	192				
5071	22	7004	192				
5209	192	7015	192				
6205	174	7021	52				
6250	56	7022	50				
6263	56	7023	50				
6264	56	7024	52				
6265	56	7301	22				
6267	102	7302	22				
6272	54	7345	54				
6273	54	7572	28				
6280	96	7573	28				
6308	96	7574	28				
6310	96	7576	28				
6359	130	7577	28				
6369	18	7578	28				
6372	194	7580	30				
6790	48	7629	194				
6791	48	7630	194				
6792	48						
6793	48						
6794	50						
6795	50						
6796	50						

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Acceleration	54
Accessory Thread Strength	52
Additional Part Marking	194
Additional Requirements	192
Air Leakage (Seal)	56
Altitude	48
Altitude Immersion	58
Altitude-Low Temperature	62
Altitude Rating	22
Aperture Cards Required	20
Applicable Documents	194
Backshell Accessories	40
Base Document	18
Cable Pull-Out	64
Cable Seal Flexing	66
Chain Tensile Strength	68
City, State, Zip	18
Classification	26
Commoning Clips	36
Company Name/Command	18
Configuration	28
Contact Axial Concentricity	70
Contact Configuration	34
Contact Current Rating	28
Contact Engagement and Separation Force	72
Contact Insertion and Removal Force	78
Contact Resistance	82
Contact Retention	84
Contacts	34
Contract Number/Office Symbol	18
Control, Source	18
Control, Specification	20
Coupling Assurance	38
Coupling Method	28
Coupling Pin Strength	90
Crimp Tensile Strength	90
Crush	92
Date	18
Design and Construction	32
Dielectric Withstanding Voltage at Reduced Barometric Pressure	94
Dielectric Withstanding Voltage at Sea Level	98

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Durability	102
Electrical Engagement	104
External Bending Moment	106
Finishes	30
Fire Wall	108
Flammability	110
Fluid Immersion	112
Format	18
Fungus	114
Gage Location and Retention	116
Grommet Sealing Plugs	42
Grommet (Wire Seal)	40
Government Design Activity FSCM	18
Humidity	120
Hydrolytic Stability	48
Identification	36
Illustrations	30
Insert	32
Insert Grommet Bonding	124
Insertion	36
Insert Retention	126
Insulation Resistance	128
Low-Signal Level Contact Resistance	132
Lubrication	44
Magnetic Permeability	134
Maintenance Aging	136
Materials	30
Mating and Unmating Forces	140
Mating Connector	44
Metals	30
Mounting Hardware	192
Nomenclature	194
Notes	194
Oversize Pin Exclusion	144
Ozone Exposure	146

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Packaging	194
Part Marking	194
Part Number	20
Part Number Cross-Reference	194
Phone Number	18
Pin Contact Stability	148
Plating Adhesion	150
Polarization	38
Potting	46
Probe Damage (Contacts)	152
Protective Cover (Cap)	40
Quality Assurance Provisions	194
Rated Working Voltage	24
Rear Release Indicator	48
Removal	36
Requester FSCM	18
Requester's Name	18
Revision of AEDPS Document (Number)	20
RFI Shielding	154
RFI Spring Finger Force	158
RFI Spring Fingers	46
Safety Wiring	46
Salt Spray	158
Scope	20
Screw Threads	48
Seal and Sealing	44
Shell to Shell Conductivity	162
Shock, High Impact	166
Shock, Specified Pulse	170
Simulated Life	162
Sizes	34
Solderability	172
Source Table	20
Storage Conditions	192
Street/Building	18
Superseded Document	194
System Application	18
Tabulated Characteristics	30
Temperature	50
Temperature Cycling	174
Temperature Life	178

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Temperature Rating	22
Termination	36
Thermal Shock (Hermetics)	180
Tools	38
Type	34
Units of Measure	20, 28
Vibration	182
Water Pressure	190
Weight	50
Workmanship	192

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-65A(MI), dated 15 December 1978 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-65A(MI), dated 15 December 1978 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
DOD STD 35-65A

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander,
U.S. Army Missile R & D Command
ATTN: DRDMI-ESD,
Redstone Arsenal, Alabama 35809

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.