DOD-STD-35-66A(MI)
1 December 1978
SUPERSEDING
SECTION I
MIL-STD-35-66(MI)
1 DECEMBER 1974

MILITARY STANDARD

CONNECTORS, ELECTRICAL, PRINTED WIRING BOARD

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

FSC EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Connectors, Electrical, Printed Wiring Board
Automated Engineering
Document Preparation System

DOD-STD-35-66A(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-66A(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for electrical, printed wiring board connectors.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures descri bed in the basic document (DOD-STD-35D and subsequent revisions) be foll owed explicitly in order to produce a document suitable for procurement, Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part,

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	3
	2.1	Issues of documents	3
	2.2	Other publications	3
	3.	DEFINITIONS	5
	4.	GENERAL REQUIREMENTS	7
	4.1	Introduction	7
	4.2	Specification Requirement Sheet (SRS)	7
	4.3	Configuration	7
	4.3.1	Dimensions	7
	4.3.2	Illustrations	7
	4.4	Units of measure	7
	5.	DETAILED REQUIREMENTS	9
	5.1	Introduction	9
	5.2	MSE Formats	9
	5.3	Referenced documents	9
	5.4	Tabulation	9
	5.5	Keyword Code Index (KCI) and Standard Paragraphs	11
	5.5.1	Interrelationship of Codes	11
	5.5.2	Automatic MSE Data	11
	5.5.3	DOD-STD-35 Tables	11

TABLES

Tables	I.	Title Index	2
	II.	Tabulation candidates	10

APPENDICES

Appendix	A.	Illustrations	119
	B.	Characteristic Code Index	161
		Index	167

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for electrical, printed wiring board connectors.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list c@ntains additional subjects that are applicable to all AEDPS dash-nurrbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. it is recorded that MIL-STD-1353, Selection and Use of Electrical Connectors be reviewed prior to using this dash-numbered part book.

The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated, If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE 'will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026t0-26T07:24Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	COVERAGE
CONNECTORS, ELECTRICAL, PRINTED WIRING BOARD	073001	MIL-C-21097	BOARD INSERTED AND TWO-PART
CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES	073003	MIL-C-553132	TWO-PART

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-C-21097	Connectors, Electrical, Printed Wiring Board, General Purpose, General Specification For

STANDARDS

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-454	Standard General Requirements for Electronic Equipment
MIL-STD-810	Environmental Test Methods
MIL-STD-1285	Marking of Electric and Electronic Parts
MIL-STD-1344	Test Methods for Electrical Connectors
MIL-STD-1523	Age Control of Age-Sensitive Elastomeric Materials

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

ASTME380 Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St,, Philadelphia, PA 19103,)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Connectors, Electrical, Printed Wiring Board.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for Connectors, Electrical, Printed Wiring Board, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Connectors, Electrical, Printed Wiring Board.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are appllcable to Connectors, Electrical, Printed Wiring Board.

4.3.2 Illustrations. Illustrations applicable to Connectors, Electrical, Printed Wiring Boardare contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance is using S1. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEOPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table II provides codes for column headings whicn may be used for printed wiring board connector characteristics. When different units of measure. within one system (U.S. or SI) are available tor specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil -- Downloaded: 2026t0-26T07:24Z
Check the source to verify that this is the currentversion before use.

TABLE II. TABULATION CANDIDATES

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1564	NUMBER OF CONTACTS	1566	CONT TERMN LETTER PER 073-02-1	1580	PLZN
1938	NOM BOARD THICKNESS INCH	1940	NOM BOARD THICKNESS MILLIM	1942	MIN BOARD THICKNESS INCH
1944	MIN BOARD THICKNESS MILLIM	1946	MAX BOARD THICKNESS INCH	1948	MAX BOARD THICKNESS MILLIM
2114	CONTACT TYPE	2122	CONTACT TERMN TYPE	2132	ACCESSORY
2134	ACCESSORY PART NO.	2142	MATING CONN PART NUMBER		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.5 Keyword Code Index (KCI) and Standard P aragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.5.1 Interrelationship of codes. The interrelationship of the codes is shown by the Indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "x" entries.

5.5.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.5.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer fo DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	O101
*COOMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT	0700
ONE SECTION DOCUMENT	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6874	THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).
0107	
0108	0108. SCOPE. SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE. PART NUMBER. THE PART NUMBER FOR THE ITEM IS S~'PPLIE3 BY COMPUTER. PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.
6941	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.
6942	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS 0THERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION	
IN ACCORDANCE WITH THE BASE DOCUMENT	
TYPE (DESIGNATION)	1906
STYLE (DESIGNATION)	1908
CLASS (DESIGNATION)	1910
SIZE (DESIGNATION)	1912
MOUNTING PROVISION SYMBOL (DESIGNATION)	1914
TERMINAL TYPE (DESIGNATION)	1916
MOUNTING HARDWARE TYPE (DESIGNATION)	1918
CONTACT CURRENT RATING	1962
MAXIMUM (AMPERES)	
NOMINAL (AMPERES)	1936
RATED WORKING VOLTAGE	
SEA LEVEL (SELECT ONE)	
(VOLTS AC)	1920
(VOLTS DC)	1922
(VOLTS DC OR RMS)	1924

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CLASSIFICATION.
1906	TYPE 1906 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1908	STYLE 1908 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1910	CLASS 1910 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1912	SIZE 1912 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1914	MOUNTING PROVISION SYMBOL 1914 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1916	TERMINAL TYPE 1916 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY,
1918	MOUNTING HARDWARE 1918 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
	CONTACT CURRENT RATING.
1562	THE MAXIMUM CONTACT CURRENT RATING SHALL BE 1562 AMPERE(S).
1936	THE NOMINAL CONTACT CURRENT RATING SHALL BE 1936 AMPERE(S).
	RATED WORKING VOLTAGE.
1920	THE MAXIMUM RATED WORKING VOLTAGE AT SEA LEVEL SHALL BE 1920 VOLTS AC.
1922	THE MAXIMUM RATED WORKING VOLTAGE AT SEA LEVEL SHALL BE 1922 VOLTS DC.
1924	THE MAXIMUM RATED WORKING VOLTAGE AT SEA LEVEL SHALL BE 1924 VOLTS DC OR RMS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RATED WORKING VOLTAGE (CONT)	
ALTITUDE (SELECT ONE)	
VOLTAGE	
(VOLTS AC)	1926
(VOLTS DC)	1928
(VOLTS DC OR RMS)	1930
ALTITUDE (SELECT ONE)	
(FEET)	1932
(METERS)	1934
BOARD THICKNESS	
NOMINAL (SELECT ONE)	
(INCH)	1938
(MILLIMETERS)	1940
MINIMUM (SELECT ONE)	
(INCH)	1942
(MILLIMETERS)	1944
MAXIMUM (SELECT ONE)	
(INCH)	1946

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1926	THE MAXIMUM RATED WORKING VOLTAGE AT ALTITUDE SHALL BE 1926 VOLTS AC.
1928	THE MAXIMUM RATED WORKING VOLTAGE AT ALTITUDE SHALL BE 1928 VOLTS DC.
1930	THE MAXIMUM RATED WORKING VOLTAGE AT ALTITUDE SHALL BE 1930 VOLTS DC OR RMS.
1932	THE REDUCED RATED WORKING VOLTAGE ALTITUDE SHALL BE 1932 FEET.
1934	THE REDUCED RATED WORKING VOLTAGE ALTITUDE SHALL BE 1934 METERS.
	BOARD THICKNESS.
1938	THE NOMINAL BOARD THICKNESS SHALL BE 1938 INCH.
1940	THE NOMINAL BOARD THICKNESS SHALL BE 1940 MILLIMETER(S).
1942	THE MINIMUM BOARD THICKNESS SHALL BE 1942 INCH.
1944	THE MINIMUM BOARD THICKNESS SHALL BE 1944 MILLIMETER(S).
1946	THE MAXIMUM BOARD THICKNESS SHALL BE 1946 INCH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
BOARD THICKNESS (CONT)	
MAXIMUM (CONT)	
(MILLIMETERS)	1948
READOUT	
SINGLE.	1950
DUAL.	1952
MULTILAYER.	1954
ALTITUDE RATING.	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5060
SEA LEVEL TO (METERS)	5061
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5062
SEA LEVEL TO (METERS)	5063
TEMPERATURE RATING	
MAXIMUM OPERATING (DEGREES CELSIUS)	5069
MAXIMUM NONOPERATING (DEGREES CELSIUS)	5071
MAXIMUM STORAGE (DEGREES CELSIUS)	7302

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1948	THE MAXIMUM BOARD THICKNESS SHALL BE 1948 MILLIMETER.
	READOUT.
1950	CONNECTER SHALL BE SINGLE READOUT.
1952	CONNECTOR SHALL BE DUAL READOUT.
1954	CONNECTOR SHALL BE MULTILAYER READOUT
	ALTITUDE RATING,
5060	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5060 FEET.
5061	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5061 METERS.
5062	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5062 FEET.
5063	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5063 METERS.
	TEMPERATURE RATING.
5069	THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS.
5071	THE MAXIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5071 DEGREES CELSIUS.
7302	THE MAXIMUM STORAGE TEMPERATURE RATING SHALL BE 7302 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE RATING (CONT)	
MAXIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5054
MINIMUM OPERATING (DEGREES CELSIUS)	5068
MINIMUM NONOPERATING (DEGREES CELSIUS)	5070
MINIMUM STORAGE (DEGREES CELSIUS)	73011
MINIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5052
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
*UNITS (SELECT ONE)	
U.S.	
(INCHES)	7572
SI	
(MILLIMETERS)	7577
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950

NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
5054	THE MAXIMUM AMBIENT OPERATING TEMPERATURE SHALL BE 5054 DEGREES CELSIUS.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.
5070	THE MINIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5070 DEGREES CELSIUS.
7301	THE MINIMUM STORAGE TEMPERATURE RATING SHALL BE 7301 DEGREES CELSIUS.
5052	THE MINIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5052 DEGREES CELSIUS.
	CONFIGURATION.
1O09	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES,
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS,

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TABULATED CHARACTERISTICS (SEE TABLE IV? DOD-STD-35)	
MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE IX IS USED.	
METALS	
DISSIMILAR METALS.	7580
DESIGN AND CONSTRUCTION	
CONTACTS	
POSITIONS (QUANTITY)	1564
ARRANGEMENT (DOC DES)	2102
CENTER TO CENTER SPACING (SELECT ONE)	
(INCH)	2104
(MILLIMETERS)	2106

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
	FINISH(S), FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
7580	METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.
	DESIGN AND CONSTRUCTION.
	CONTACTS.
1564	THERE SHALL BE 1564 CONTACT POSITIONS.
2102	THE CONTACT ARRANGEMENT FOR THE CONNECTOR SHALL BE IN ACCORDANCE WITH 2102.
2104	CONTACTS SHALL BE ON 2104 INCH CENTER TO CENTER SPACING.
2106	CONTACTS SHALL BE ON 2106 MILLIMETER(S) CENTER TO CENTER SPACING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
CONTACTS (CONT)	
MAXIMUM FLOAT (SELECT ONE)	
(INCH)	2108
(MILLIMETERS)	2110
(TIR)	2112
CONTACT TYPE	
(DESIGNATION), PIN, SOCKET	2114
(PART NUMBER)	2116
*(VENDOR FSCM)	2118
CONFIGURATION (DESIGNATION)	2120
CONTACT TERMINATION	
TYPE (DESIGNATION),CRIMP, SOLDER	2122
ILLUSTRATION 073-02-1 (LETTER)	1566
AWG WIRE (SIZE)	2124
WIRE DIAMETER (MILLIMETERS)	2126
COMMONING CLIPS	
(PART NUMBER)	1606
CONTACT IDENTIFICATION (SELECT ONE)	
ALPHABETIC.	1574

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2108 CONTACT FLOAT SHALL BE NOT GREATER THAN 2108 INCH.

2110 CONTACT FLOAT SHALL BE NOT GREATER THAN 2110 MILLIMETER(S),

2112 CONTACT FLOAT SHALL BE NOT GREATER THAN 2112 TIR.

2114 CONTACT TYPE. THE CONTACTS SHALL BE 2114.

2116 CONTACT PART NUMBER(S) 2116 FROM FSCM
2118 2118 SHALL APPLY.

2120 THE CONTACT CONFIGURATION SHALL BE IN ACCORDANCE WITH 2120.

CONTACT TERMINATION*

2122 THE CONTACT TERMINATION SHALL BE 2122 TYPE.

1566 THE CONTACT TERMINATION SHALL BE TYPE 1566 IN ACCORDANCE WITH ILLUSTRATION 073-02-1.

2124 CONTACTS SHALL ACCOMMODATE 2124 AWG SIZE WIRE,

2126 CONTACTS SHALL ACCOMMODATE 2326 MILLIMETER(S) DIAMETER WIRE.

COMMONING CLIPS.

1606 COMMONING CLIPS, PART NUMBER 1606, SHALL BE APPLICABLE.

CONTACT IDENTIFICATION

1574 ALPHABETIC CHARACTERS SHALL BE USED TO IDENTIFY THE CONTACT POSITIONS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
CONTACT INDENTIFICATION (CONT)	
NUMERIC.	1576
ALPHABETIC AND NUMERIC.	2128
TOOLS	
INSERTION TOOL (PART NUMBER)	1602
EXTRACTION TOOL (PART NUMBER)	2130
CRIMP TOOL (PART NUMBER)	1604
ACCESSORIES	
(NANE)	2132
(PART NUMBER)	2134
(VENDOR FSCM)	2136
(DOC DES)	2138
MATING CONNECTOR	
(DOC DES)	2140
(PART NUMBER)	2142
(VENDOR FSCM)	2144
SEAL AND SEALING	
INTERFACIAL SEAL REQUIRED.	2146

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1576	NUMERIC CHARACTERS SHALL BE USED TO IDENTIFY THE CONTACT POSITIONS.
2128	ALPHABETIC AND NUMERIC CHARACTERS SHALL BE USED TO IDENTIFY THE CONTACT POSITIONS.
	TOOLS.
1602	THE CONTACT INSERTION TOOL PART NUMBER(S) SHALL BE 1602.
2130	THE CONTACT REMOVAL TOOL PART NUMBER(S) SHALL BE 2130.
1604	CRIMPING TOOL PART NUMBER(S) SHALL BE 1604.
	ACCESSORIES.
2132	CONNECTOR SHALL INCLUDE 2132.
2134	THE PART NUMBER FOR THE ACCESSORY SHALL BE 2134.
2136	THE ACCESSORY VENDOR FSCM SHALL BE 2136.
2138	THE ACCESSORY SHALL BE IN ACCORDANCE WITH 2138.
	MATING CONNECTOR.
2140	THE MATING CONNECTOR SHALL BE IN ACCORDANCE WITH 2140.
2142	THE MATING CONNECTOR PART NUMBER SHALL BE 2142.
2144	THE MATING CONNECTOR VENDOR FSCM SHALL BE 2144.
	SEAL AND SEALING.
2146	CONNECTOR SHALL HAVE AN INTERFACIAL SEAL ON THE MATING SIDE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
ALTITUDE	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	6790
SEA LEVEL TO (METERS)	6791
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	6792
SEA LEVEL TO (METERS)	6793
TEMPERATURE	
MAXIMUM OPERATING (DEGREES CELSIUS)	6794
MAXIMUM NONOPERATING (DEGREES CELSIUS)	6795
MAXIMUM STORAGE (DEGREES CELSIUS)	6796
MAXIMUM AMBIENT OPERATING (DEGREES CELSIUS)	6798
MINIMUM OPERATING (DEGREES CELSIUS)	6799
MINIMUM STORAGE (DEGREES CELSIUS)	6801

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6790	OPERATING ALTITUDE. THE OPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6790 FEET.
6791	OPERATING ALTITUDE. THE OPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6791 METERS.
6792	NONOPERATING ALTITUDE. THE NONOPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6792 FEET.
6793	NONOPERATING ALTITUDE. THE NONOPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6793 METERS.
6794	MAXIMUM OPERATING TEMPERATURE. THE OPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6794 DEGREES CELSIUS.
6795	MAXIMUM NONOPERATING TEMPERATURE. THE NONOPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6795 DEGREES CELSIUS,
6796	MAXIMUM STORAGE TEMPERATURE, THE STORAGE TEMPERATURE SHALL BE NOT GREATER THAN 6796 DEGREES CELSIUS.
6798	MAXIMUM AMBIENT OPERATING TEMPERATURE, THE AMBIENT OPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6798 DEGREES CELSIUS.
6799	MINIMUM OPERATING TEMPERATURE, THE OPERATING TEMPERATURE SHALL BE NOT LESS THAN 6799 DEGREES CELSIUS,
6801	MINIMUM STORAGE TEMPERATURE. THE STORAGE TEMPERATURE SHALL BE NOT LESS THAN 6801 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
TEMPERATURE (CONT)	
MINIMUM AMBIENT OPERATING (DEGREES CELSIUS)	6803
WEIGHT	
MAXIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (5ELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6803	MINIMUM AMBIENT OPERATING TEMPERATURE. THE AMBIENT OPERATING TEMPERATURE SHALL BE NOT LESS THAN 6803 DEGREES CELSIUS,
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7023	MAXIMUM WEIGHT PER UNIT, THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUNDS(S).
7021	MAXIMUM WEIGHT PER UNITo THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026t0-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
POLARIZATION	
GUIDE PINS.	1584
GUIDE SOCKETS.	1586
A GUIDE PIN AND A GUIDE SOCKET.	2150
KEYING PINS, (PART NUMBER)	2152
KEYING SOCKETS, (PART NUMBER)	2154
KEYING PIN, (PART NUMBER), AND KEYING SOCKET (PART NUMBER)	2156 2158
KEYING SLEEVE.	2160
KEYING PIN.	2162
EXTERNAL KEY.	2164
EXTERNAL KEY (PART NUMBER)	2166
BETWEEN CONTACT KEY.	1582
BETWEEN CONTACT KEY (PART NUMBER)	2168
REPLACE CONTACT KEY.	2170
REPLACE CONTACT KEY (PART NUMBER)	2172
KEY IN ACCORDANCE WITH ILLUSTRATION (NUMBER) SEE APPENDIX A	2174
SHELL SHAPE.	1590
DUMMY TERMINALS (POSITIONS)	2176
POLARIZATION PER BASE DOCUMENT (NUMBER)	2178
POLARIZATION SHALL BE ____	1580

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	POLARIZATION. POLARIZATION SHALL BE AS FOLLOWS:
1584	GUIDE PINS.
1586	GUIDE SOCKETS.
2150	A GUIDE PIN AND A GUIDE SOCKET,
2152	KEYING PINS, PART NUMBER 2152.
2154	KEYING SOCKETS, PART NUMBER 2154.
2156 2158	KEYING PIN, PART NUMBER 2156, AND KEYING SOCKET, PART NUMBER 2158.
2160	KEYING SLEEVE.
2162	KEYING PIN.
2164	EXTERNAL KEY.
2166	EXTERNAL KEY, PART NUMBER 2166.
1582	BETWEEN CONTACT KEY.
2168	BETWEEN CONTACT KEY, PART NUMBER 2168.
2170	REPLACE CONTACT KEY.
2172	REPLACE CONTACT KEY, PART NUMBER 2172.
2174	KEY IN ACCORDANCE WITH ILLUSTRATION 2174.
1590	SHELL SHAPE.
2176	DUMMY TERMINAL(S) IN POSITION(S) 2176.
2178	POLARIZATION NUMBER 2178 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1580	POLARIZATION SHALL BE 1580.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
BOARD ENGAGEMENT FORCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2300
MAXIMUM (POUNDS)	2302
MAXIMUM (NEWTONS)	2304
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2306
PER MIL-C-2L0970	2308
MAXIMUM GAGE THICKNESS (SELECT ONE)	
(INCH)	2310
(MILLIMETERS)	2312
MINIMuM GAGE LENGTH (SELECT ONE)	
(INCH)	2314
(MILLIMETERS)	2316
MAXIMUM GAGE LENGTH (SELECT ONE)	
(INCH)	2318
(MILLIMETERS)	2320

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:24Z
Check the source to verify that this is the currentversion before use.

CHAR
CODE STANDARD PARAGRAPH

2300 BOARD ENGAGEMENT FORCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2300.

2302 BOARD ENGAGEMENT FORCE. THE TOTAL BOARD (GAGE) INSERTION FORCE SHALL BE NOT GREATER THAN 2302 POUND(S).

2304 BOARD ENGAGEMENT FORCE. THE TOTAL BOARD (GAGE) INSERTION FORCE SHALL BE NOT GREATER THAN 2304 NEWTON(S).

2306 BOARD ENGAGEMENT FORCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2306.

2308 BOARD ENGAGEMENT FORCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE TOTAL ENGAGEMENT FORCE TEST OF MIL-C-21097.

2310 GAGE THICKNESS SHALL BE NOT GREATER THAN 2310 INCH.

2312 GAGE THICKNESS SHALL BE NOT GREATER THAN 2312 MILLIMETER(S).

2314 GAGE LENGTH SHALL BE NOT LESS THAN 2314 INCH(S).

2316 GAGE LENGTH SHALL BE NOT LESS THAN 2316 MILLIMETER(S).

2318 GAGE LENGTH SHALL BE NOT GREATER THAN 2318 INCH(S).

2320 GAGE LENGTH SHALL BE NOT GREATER THAN 2320 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
BOARD INSERTION FORCE (OVERSTRESS)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1782
NO EVIDENCE OF PHYSICAL DAMAGE.	1784
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1774
APPLY AXIAL FORCE.	2322
MINIMUM FORCE (SELECT ONE)	
(POUNDS)	1778
(NEWTONS)	2324
FORCE APPLICATION (SELECT ONE)	
THROUGH TEST BOARD.	2326
THROUGH MATING CONNECTOR.	2328
BOND STRENGTH, BODY ASSEMBLY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1768

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1782	BOARD INSERTION FORCE (OVERSTRESS). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT EXCEPT 1782.
1784	BOARD INSERTION FORCE (OVERSTRESS). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1774	BOARD INSERTION FORCE (OVERSTRESS). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1774.
2322	BOARD INSERTION FORCE (OVERSTRESS). TESTING SHALL BE PERFORMED BY APPLYING AN AXIAL FORCE TO THE CONNECTOR UNDER TEST IN THE DIRECTION OF INSERTION.
1778	AXIAL FORCE SHALL BE NOT LESS THAN 1778 POUND(S).
2324	AXIAL FORCE SHALL BE NOT LESS THAN 2324 NEWTON(S).
2326	FORCE SHALL BE APPLIED THROUGH A PRINTED WIRING TEST BOARD.
2328	FORCE SHALL BE APPLIED THROUGH A MATING CONNECTOR.
1768	BOND STRENGTH, BODY ASSEMBLY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1768.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
BOND STRENGTH, BODY ASSEMBLY (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF CRACKING, BREAKING, LOOSENING OR PARTS OR DELAMINATION.	1770
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1762
PER MIL-C-21097,	1764
APPLIED FORCE (SELECT ONE)	
(POUNDS)	2330
(NEWTONS)	2332
CONTACT AXIAL CONCENTRICITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ___	1820
MAXIMUM TRUE INDICATOR READING (VALUE)	1822
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1812

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1770	BOND STRENGTH, BODY ASSEMBLY. THERE SHALL BE NO EVIDENCE OF CRACKING, BREAKING, LOOSENING OF PARTS OR DELAMINATION OF THE CONNECTOR BODY.
1762	BOND STRENGTH, BODY ASSEMBLY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1762.
1764	BOND STRENGTH, BODY ASSEMBLY, TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BOND STRENGHT, BODY ASSEMBLY TEST OF MIL-C-21097.
2330	THE APPLIED FORCE SHALL BE GRADUALLY INCREASED TO A MAXIMUM OF 2330 POUND(S).
2332	THE APPLIED FORCE SHALL BE GRADUALLY INCREASED TO A MAXIMUM OF 2332 NEWTON(S),
1820	CONTACT AXIAL CONCENTRICITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1820.
1822	CONTACT AXIAL CONCENTRICITY. THE TRUE INDICATOR READING SHALL BE NOT GREATER THAN 1822.
1812	CONTACT AXIAL CONCENTRICITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1812.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT AXIAL CONCENTRICITY (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-1344, METHOD 2001.	2334
CONTACT ENGAGEMENT AND SEPARATION FORCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1712
AS FOLLOWS:	2336
MAXIMUM ENGAGEMENT FORCE (SELECT ONE)	
(POUNDS)	2338
(OUNCES)	1714
(NEWTONS)	2340
MAXIMUM SEPARATION FORCE (SELECT ONE)	
(POUNDS)	2342
(OUNCES)	2344
(NEWTONS)	2346
MINIMUM SEPARATION FORCE (SELECT ONE)	
(POUNDS)	2348
(OUNCES)	1716
(NEWTONS)	2350

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2334 CONTACT AXIAL CONCENTRICITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD OF MIL-STD-1344.

1712 CONTACT ENGAGEMENT AND SEPARATION FORCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1712.

2336 CONTACT ENGAGEMENT AND SEPARATION FORCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2338 THE ENGAGEMENT FORCE SHALL BE NOT GREATER THAN 2338 POUND(S).

1714 THE ENGAGEMENT FORCE SHALL BE NOT GREATER THAN 1714 OUNCE(S).

2340 THE ENGAGEMENT FORCE SHALL BE NOT GREATER THAN 2340 NEWTON(S).

2342 THE SEPARATION FORCE SHALL BE NOT GREATER THAN 2342 POUND(S).

2344 THE SEPARATION FORCE SHALL BE NOT GREATER THAN 2344 OUNCE(S).

2346 THE SEPARATION FORCE SHALL BE NOT GREATER THAN 2346 NEWTON(S).

2348 THE SEPARATION FORCE SHALL BE NOT LESS THAN 2348 POUND(S).

1716 THE SEPARATION FORCE SHALL BE NOT LESS THAN 1716 OUNCE(S).

2350 THE SEPARATION FORCE SHALL BE NOT LESS THAN 2350 NEWTON(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT ENGAGEMENT AND SEPARATION FORCE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1706
PER MIL-STD-1344, METHOD 2014.	2352
PROCEDURE I.	2354
MAXIMUM PIN DIAMETER (SELECT ONE)	
(INCH)	2356
(MILLIMETERS)	2358
MAXIMUM BLADE WIDTH (SELECT ONE)	
(INCH)	2360
(MILLIMETERS)	2362
MAXIMUM BLADE THICKNESS (SELECT ONE)	
(INCH)	2364
(MILLIMETERS)	2366
MINIMUM PIN DIAMETER (SELECT ONE)	
(INCH)	2368
(MILLIMETERS)	2370
MINIMUM BLADE WIDTH (SELECT ONE)	
(INCH)	2372

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1706 CONTACT ENGAGEMENT AND SEPARATION FORCE, TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1706.

2352 CONTACT ENGAGEMENT AND SEPARATION FORCE, TESTING SHALL BE FORMED IN ACCORDANCE WITH METHOD 2014 OF MIL-STD-1344.

2354 PROCEDURE I SHALL APPLY.

2356 THE MAXIMUM SIZE PIN SHALL BE 2356 INCH DIAMETER,

2358 THE MAXIMUM SIZE PIN SHALL BE 2358 MILLIMETER(S) DIAMETER.

2360 THE MAXIMUM SIZE BLADE SHALL BE 2360 INCH IN WIDTH.

2362 THE MAXIMUM SIZE BLADE SHALL BE 2362 MILLIMETER(S) IN WIDTH.

2364 THE MAXIMUM SIZE BLADE SHALL BE 2364 INCH IN THICKNESS.

2366 THE MAXIMUM SIZE BLADE SHALL BE 2366 MILLIMETER(S) IN THICKNESS.

2368 THE MINIMUM SIZE PIN SHALL BE 2368 INCH IN THICKNESS*

2370 THE MINIMUM SIZE PIN SHALL BE 2370 MILLIMETER(S) DIAMETER.

2372 THE MINIMUM SIZE BLADE SHALL BE 2372 INCH IN WIDTH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT ENGAGEMENT AND SEPARATION FORCE (CONT)	
MINIMUM BLADE WIDTH (CONT)	
(MILLIMETERS)	2374
MINIMUM BLADE THICKNESS (SELECT ONE)	
(INCH)	2376
(MILLIMETERS)	2378
PROCEDURE II,	2380
CONTACT (PART NUMBER)	2382
MAXIMUM SURFACE ROUGHNESS (SELECT ONE)	
(MICROINCHES RMS)	2384
(MICROMETERS RMS)	2386
MINIMUM DEPTH OF ENGAGEMENT (SELECT ONE)	
(INCH)	2388
(MILLIMETERS)	2390
CONTACT INSERTION AND REMOVAL FORCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2392
AS FOLLOWS:	2394

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2374 THE MINIMUM SIZE BLADE SHALL BE 2374 MILLIMETER(S) IN WIDTH.

2376 THE MINIMUM SIZE BLADE SHALL BE 2376 INCH IN THICKNESS.

2378 THE MINIMUM SIZE BLADE SHALL BE 2378 MILLIMETER(S) IN THICKNESS.

2380 PROCEDURE II SHALL APPLY.

2382 THE PART NUMBER OF THE QUALIFIED CONTACT TO BE INSERTED SHALL BE 2382.

2384 TEST CONTACT SURFACE FINISH SHALL BE NOT GREATER THAN 2384 MICROINCHES RMS.

2386 TEST CONTACT SURFACE FINISH SHALL BE NOT GREATER THAN 2386 MICROMETERS RMS.

2388 DEPTH OF ENGAGEMENT SHALL BE NOT LESS THAN ~~2388~~ INCH.

2390 DEPTH OF ENGAGEMENT SHALL BE NOT LESS THAN ~~2390~~ MILLIMETER(S).

2392 CONTACT INSERTION AND REMOVAL FORCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT EXCEPT ~~2392~~

2394 CONTACT INSERTION AND REMOVAL FORCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT INSERTION AND REMOVAL FORCE (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM INSERTION FORCE (SELECT ONE)	
(POUNDS)	2396
(NEWTONS)	2398
MAXIMUM REMOVAL FORCE (SELECT ONE)	
(POUNDS)	2400
(NEWTONS)	2402
MINIMUM REMOVAL FORCE (SELECT ONE)	
(POUNDS)	2404
(NEWTONS)	2406
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2408
PER MIL-STD-1344, METHOD 2012.	2410
QUANTITY OF CONTACTS MEASURED (PERCENT)	2412
WIRE TYPE (DESIGNATION)	2414
WIRE DOCUMENT (DOC DES)	2416

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2396	THE FORCE REQUIRED TO INSERT A CONTACT SHALL BE NOT GREATER THAN 2396 POUND(S).
2398	THE FORCE REQUIRED TO INSERT A CONTACT SHALL BE NOT GREATER THAN 2398 NEWTON(S).
2400	THE FORCE REQUIRED TO REMOVE A CONTACT SHALL BE NOT GREATER THAN 2400 POUND(S),
2402	THE FORCE REQUIRED TO REMOVE A CONTACT SHALL BE NOT GREATER THAN 2402 NEWTON(S).
2404	THE FORCE REQUIRED TO REMOVE A CONTACT SHALL BE NOT LESS THAN 2404 POUND(S).
2408	CONTACT INSERTION AND REMOVAL FORCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2408.
2410	CONTACT INSERTION AND REMOVAL FORCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2012 OF MIL-STD-1344.
2412	THE CONNECTOR SHALL HAVE 2412 PERCENT OF THE CONTACTS MEASURED.
2414	WIRE TYPE 2414 SHALL BE USED.
2416	WIRE SHALL BE IN ACCORDANCE WITH 2416.s

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT INSERTION AND REMOVAL FORCE (CONT)	
PER MIL-STD-IJ344, METHOD 2012. (CONT)	
CONDUCTOR SIZE (DESIGNATION)	2418
INSERTIONS AND WITHDRAWALS (QUANTITY)	2420
INSERTION TOOL (PART NUMBER)	2422
EXTRACTION TOOL (PART NUMBER)	2424
CONTACT RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1878
AS FOLLOWS:	1879
MAXIMIJM INDIVIDUAL RESISTANCE (SELECT ONE)	
(MILLIVOLTS)	2100
(OHMS)	1800
MAXIMUM INCREASE AT SUCCEEDING MEASUREMENT (PERCENT)	2426
MAXIMUM AVERAGE CONTACT RESISTANCE (OHMS)	2428

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:24Z
Check the source to verify that this is the currentversion before use.

CHAR
CODE STANDARD PARAGRAPH

2418 CONDUCTOR SIZE 2418 SHALL BE USED.

2420 THERE SHALL BE 2420 INSERTIONS AND WITHDRAWALS WITH MEASUREMENTS TAKEN ON THE FIRST AND LAST CYCLES.

2422 INSERTION TOOL PART NUMBER SHALL BE 2422.

2424 EXTRACTION TOOL PART NUMBER SHALL B3 2424.

1878 CONTACT RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1878.

1879 CONTACT Resistance THE CONTACT RESISTANCE SHALL BE AS FOLLOWS:

2100 THE INDIVIDUAL CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2100 MILLIVOLT(S) DROP.

1800 THE INDIVIDUAL CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1800 OHM(S).

2426 THE DIFFERENCE BETWEEN THE INITIAL MEASUREMENT AND ANY SUCCEEDING MEASUREMENT MADE UPON AN IDENTICAL INDIVIDUAL CONTACT SHALL NOT INCREASE BY MORE THAN 2426 PERCENT OF THE INITIAL MEASUREMENT.

2428 THE AVERAGE CONTACT RESISTANCE OF ALL CONTACTS MEASURED SHALL BE NOT GREATER THAN 2428 OHM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT RESISTANCE (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM RESISTANCE AT ELEVATED TEMPERATURE (SELECT ONE)	
(MILLIVOLTS)	2430
(OHMS)	2432
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1862
PER MIL-STD-1344, METHOD 30040	2434
TEST CURRENT (SELECT ONE)	
(AMPERES)	1866
(MILLIAMPERES)	2436
HIGH TEMPERATURE TEST (DEGREES CELSIUS)	2438
CONTACT RETENTION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2094
NO EVIDENCE OF PHYSICAL DAMAGE,	2096

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2430	CONTACT RESISTANCE AT ELEVATED TEMPERATURE SHALL BE NOT GREATER THAN 2430 MILLIVOLT(S) DROP.
2432	CONTACT RESISTANCE AT ELEVATED TEMPERATURE SHALL BE NOT GREATER THAN 2432 OHM(S).
1862	CONTACT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1862.
2434	CONTACT RESISTANCE, TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3004 OF MIL-STD-1344.
1866	THE TEST CURRENT SHALL BE 1866 AMPERE(S).
2436	THE TEST CURRENT SHALL BE 2436 MILLIAMPERE(S).
2438	IN ADDITION TO MEASUREMENT AT AMBIENT TEMPERATURE, PERFORM MEASUREMENT AT 2438 DEGREES CELSIUS.
2094	CONTACT RETENTION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2094.
2096	CONTACT RETENTION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE .

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME)	CHAR CODE
CONTACT RETENTION (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
MAXIMUM DISPLACEMENT WITH FORCE APPLIED (SELECT ONE)	
(INCH)	2440
(MILLIMETERS)	2442
MAXIMUM DISPLACEMENT AFTER FORCE REMOVAL (SELECT ONE)	
(INCH)	2444
(MILLIMETERS)	2446
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2084
PER MIL-STD-1344, METHOD 2007.	2448
APPLIED LOAD (SELECT ONE)	
(POUNDS)	2086
PLUS TOLERANCE (POUNDS)	2450
MINUS TOLERANCE (POUNDS)	2452

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2440	THE AXIAL DISPLACEMENT SHALL BE NOT GREATER THAN 2440 INCH DURING APPLICATION OF AXIAL FORCE,
2442	THE AXIAL DISPLACEMENT SHALL BE NOT GREATER THAN 2442 MILLIMETER(S) DURING APPLICATION OF AXIAL FORCE.
2444	THE AXIAL DISPLACEMENT SHALL BE NOT GREATER THAN 2444 INCH AFTER REMOVAL OF AXIAL FORCE.
2446	THE AXIAL DISPLACEMENT SHALL BE NOT GREATER THAN 2446 MILLIMETER(S) AFTER REMOVAL OF AXIAL FORCE.
2084	CONTACT RETENTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2084.
2448	CONTACT RETENTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2007 OF MIL-STD-1344.
2086	THE APPLIED AXIAL LOAD SHALL BE 2086 POUND(S).
2450	THE APPLIED AXIAL LOAD PLUS TOLERANCE SHALL BE 2450 POUND(S).
2452	THE APPLIED AXIAL LOAD MINUS TOLERANCE SHALL BE 2452 POUND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT RETENTION (CONT)	
APPLIED LOAD (CONT)	
(NEWTONS)	2454
PLUS TOLERANCE (NEWTONS)	2456
MINUS TOLERANCE (NEWTONS)	2458
LOAD DIRECTION (SELECT ONE)	
WIRE SIDE.	2460
FRONT SIDE.	2462
WIRE AND FRONT SIDE.	2087
QUANTITY CONTACTS TESTED (PERCENT)	2466
CONTACT WIRING (SELECT ONE)	
CUT OFF WIRES.	2090
UNWIRED CONTACTSo	2468
CRIMP RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1902
MAXIMUM VOLTAGE DROP (MILLIVOLTS)	1904
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1886

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2454	THE APPLIED AXIAL LOAD SHALL BE 2454 NEWTON(S).
2456	THE APPLIED AXIAL LOAD PLUS TOLERANCE SHALL BE 2456 NEWTON(S).
2458	THE APPLIED AXIAL LOAD MINUS TOLERANCE SHALL BE 2458 NEWTON(S).
2460	LOAD SHALL BE APPLIED TO THE WIRE SIDE OF THE CONTACT.
2462	LOAD SHALL BE APPLIED TO THE FRONT SIDE OF THE CONTACT.
2087	LOAD SHALL BE APPLIED TO BOTH THE WIRE SIDE AND THE FRONT SIDE OF THE CONTACT.
2466	THE CONNECTOR SHALL HAVE 2466 PERCENT OF THE CONTACTS TESTED.
2090	WIRES SHALL BE CUT OFF FLUSH WITH THE CONTACTS.
2468	UNWIRED CONTACTS SHALL BE USED.
1902	CRIMP RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH BASE DOCUMENT, EXCEPT 1902.
1904	CRIMP RESISTANCE. THE VOLTAGE DROP BETWEEN THE WIRE AND CRIMP BARREL SHALL NOT EXCEED 1904 MILLIVOLT(S).
1886	CRIMP RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1886.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CRIMP RESISTANCE (CONT)	
TEST METHODS (CONT)	
PER MIL-C-21097.	2470
TEST CURRENT (AMPERES)	1890
CRIMP TENSILE STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2292
MINIMUM TENSILE STRENGTH (POUNDS)	2294
MINIMUM TENSILE STRENGTH (NEWTONS)	2472
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2082
PER MIL-STD-1344, METHOD 2003.	2474
SAMPLE (QUANTITY)	2476
CRIMP TOOL (PART NUMBER)	2286

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2470	CRIMP RESISTANCE, TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-211097.
1890	THE TEST CURRENT SHALL BE 1890 AMPERE(S).
2292	CRIMP TENSILE STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2292.
2294	CRIMP TENSILE STRENGTH. THE TENSILE FORCE REQUIRED TO SEPARATE THE WIRE FROM THE CONTACT CRIMP BARREL SHALL BE NOT LESS THAN 2294 POUND(S). WIRE BREAKAGE NOT DUE TO CRIMPING, AT LESS THAN TENSILE FORCE, SHALL NOT CONSTITUTE A FAILURE.
2472	CRIMP TENSILE STRENGTH. THE TENSILE FORCE REQUIRED TO SEPARATE THE WIRE FROM THE CONTACT CRIMP BARRLE SHALL BE NOT LESS THAN 2472 NEWTON(S). WIRE BREAKAGE NOT DUE TO CRIMPING, AT LESS THAN TENSILE FORCE, SHALL NOT CONSTITUTE A FAILURE.
2082	CRIMP TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2082.
2474	CRIMP TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2003 OF MIL-STD-1344.
2476	THE NUMBER OF TEST SAMPLES SHALL BE 2476.
2286	THE CRIMP TOOL PART NUMBER SHALL BE 2286.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CURRENT CYCLING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1756
MAXIMUM VOLTAGE DROP (MILLIVOLTS)	1758
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1744
PER MIL-C-2L097.	1745
TEST CURRENT (AMPERES)	1748
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4908
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4906
MAXIMUM LEAKAGE (MILLIAMPERES)	4894

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1756	CURRENT CYCLING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1756.
1758	CURRENT CYCLING. THE VOLTAGE DROP SHALL BE NOT GREATER THAN 1758 MILLIVOLT(S).
1744	TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1744.
1745	TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-21097.
1748	TEST CURRENT SHALL BE 1748 AMPERE(S).
4908	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4908.
4906	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THERE SHALL BE NO EVIDENCE OF FLASHOVER-MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4894	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4894 MILLIAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4884
PER MIL-STD-1344, METHOD 3001.	2478
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4885
(VOLTS, AC)	4849
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4859
DURATION OF VOLTAGE APPLICATION (SECONDS)	4891
MOUNTING PER DOCUMENT (DOC DES)	6280
REGULATION OF TEST VOLTAGE (PERCENT)	6308
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE sOURCE (KILOVOLTAMPERES)	4900
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4902
(MILLIAMPERES)	6310

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4884	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4884.
2478	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 30011 OF MIL-STD-1344.
4885	TEST VOLTAGE SHALL BE 4885 VOLTS, DC.
4849	TEST VOLTAGE SHALL BE 4849 VOLTS, AC.
4859	SPECIAL PREPARATION SHALL BE IN ACCORDANCE WITH ~~4859.~~
4891	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE ~~4891~~ SECOND(S).
6280	MOUNTING SHALL BE IN ACCORDANCE WITH ~~6280.~~
6308	REGULATION OF THE TEST VOLTAGE SHALL BE WITHIN ~~6308~~ PERCENT.
4900	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4900 KILOVOLTAMPERE (S).
4902	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4902 AMPERE(S).
6310	THE SURGE CURRENT SHALL BE NOT GREATER THAN 6310. MILLIAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
PER MIL-STD-1344, METHOD 3001. (CONT)	
TEST SPECIMEN (SELECT ONE)	
MATED PLUG AND RECEPTACLE.	2480
UNMATED CONNECTOR.	2482
TEST CONDITION NUMBER	
II,	2484
III.	2486
IV.	2488
v.	2490
VI.	2492
WIRE ENDS (SELECT ONE)	
SEALED.	2494
UNSEALED.	2496
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	4874

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2480	TEST SPECIMEN SHALL CONSIST OF A MATED PLUG AND RECEPTACLE.
2482	TEST SPECIMEN SHALL BE AN UNMATED CONNECTOR.
2484	TEST CONDITION II SHALL APPLY.
2486	TEST CONDITION III SHALL APPLY,
2488	TEST CONDITION IV SHALL APPLY.
2490	TEST CONDITION V SHALL APPLY.
2492	TEST CONDITION VI SHALL APPLY.
2494	WIRE ENDS SHALL BE SEALED.
2496	WIRE ENDS SHALL BE UNSEALED.
4874	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4856
MAXIMUM LEAKAGE (MILLIAMPERES)	4875
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4861
PER MIL-STD-1344, METHOD 3001, TEST CONDITION I.	2498
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4854
(VOLTS, AC)	4855
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4850
DURATION OF VOLTAGE APPLICATION (SECONDS)	4867
MOUNTING PER DOCUMENT (DOC DES)	5000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4856	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4875	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN ~~4875~~ MILLIAMPERE(S).
4861	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861.
2498	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3001 OF MIL-STD-IJ344. TEST CONDITION I SHALL APPLY.
4854	TEST VOLTAGE SHALL BE 4854 VOLTS, DC.
4855	TEST VOLTAGE SHALL BE 4855 VOLTS, AC.
4850	SPECIAL PREPARATION OR CONDITIONS SHALL BE IN ACCORDANCE WITH 4850.
4867	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE ~~4867~~ SECOND(S).
5000	MOUNTING SHALL BE IN ACCORDANCE WITH 5000.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
PER MIL-STD-1344, METHOD 3001, TEST CONDITION I. (CONT)	
REGULATION OF TEST VOLTAGE (PERCENT)	4869
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4870
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4717
(MILLIAMPERES)	4897
METHOD OF VOLTAGE CONNECTION PER DOCUMENT (DOC DES)	6267
TEST SPECIMEN (SELECT ONE)	
MATED PLUG AND RECEPTACLE.	2500
UNMATED CONNECTOR.	2502
DURABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1652
NO EVIDENCE OF PHYSICAL DAMAGE.	2504
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(MILLIVOLTS)	2506

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4869	REGULATION OF TEST VOLTAGE SHALL BE WITHIN 4869 PERCENT.
4870	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4870 KILOVOLTAMPERE (S).
4717	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4717 AMPERE(S).
4397	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4897 MILLIAMPERE(S).
6267	METHOD OF CONNECTION OF TEST VOLTAGE SHALL BE IN ACCORDANCE WITH 6267.
2500	TEST SPECIMEN SHALL CONSIST OF A MATED PLUG AND RECEPTACLE.
2502	TEST SPECIMEN SHALL CONSIST OF AN UNMATED CONNECTOR.
1652	DURABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1652.
2504	DURABILITY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2506	THE CONTACT RESISTANCE SHALL BE NUT GREATER THAN 2506 MILLIVOLT(S) DROP.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DURABILITY (CONT)	
MAXIMUM CONTACT RESISTANCE (CONT)	
(OHMS)	1654
MINIMUM CONTACT SEPARATION FORCE (SELECT ONE)	
(OUNCES)	2508
(POUNDS)	1658
(NEWTONS)	2510
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1644
PER MIL-STD-1344, METHOD 2016	2512
INSERTIONS (SELECT ONE)	
GAGE INSERTIONS (QUANTITY)	1646
GAGE (SIZE)	2514
MATING CONNECTOR INSERTIONS (QUANTITY)	2516
NOMINAL CYCLE RATE (CYCLES PER HOUR)	1648

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1654	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1654 OHM(S).
2508	THE INDIVIDUAL CONTACT SEPARATION FORCE SHALL BE NOT LESS THAN 2508 OUNCE(S).
1658	THE INDIVIDUAL CONTACT SEPARATION FORCE SHALL BE NOT LESS THAN 1658 POUND(S).
2510	THE INDIVIDUAL CONTACT SEPARATION FORCE SHALL BE NOT LESS THAN 2510 NEWTON(S),
1644	DURABILITY, TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1644.
2512	DURABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2016 OF MIL-STD-1344.
1646	THERE SHALL BE 1646 INSERTIONS OF A MAXIMUM THICKNESS FLAT STEEL GAGE.
2514	GAGE SHALL BE SIZE 2514.
2516	THERE SHALL BE 2516 INSERTIONS OF A MATING CONNECTOR.
1648	THE NOMINAL CYCLE RATE SHALL BE 1648 CYCLES PER HOUR.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4760
FUNGUS RESISTANT BY CERTIFICATION OR BY TEST.	4761
NO EVIDENCE OF FUNGUS GROWTH WHEN TESTED.	4762
REQUIREMENT 4 OF MIL-STD-454.	2518
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4754
PER MIL-STD-810, METHOD 508.	4755
TEST PERIOD (DAYS)	4755

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4760	FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.
4761	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNALS MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED, THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4762	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
2518	FUNGUS. MATERIALS OF CONSTRUCTION FOR THE CONNECTOR SHALL BE NONNUTRIENT FOR FUNGUS AS SPECIFIED IN REQUIREMENT 4 OF MIL-STD-454. CERTIFICATION OF THIS REQUIREMENT SHALL BE PROVIDED BY THE MANUFACTURER.
4754	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.
4755	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.
4756	TEST PERIOD SHALL BE 4756 DAY(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTICS NAME	CHAR CODE
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4798
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	4799
NO DEGRADATION OF PERFORMANCE.	4815
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1477
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	4795
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	4a05
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	48L3
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	4803
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4788

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4798	HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.
4799	HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
4815	THERE SHALL BE NO DEGRADATION OF PERFORMANCE,
1477	THERE SHALL BE NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DIELECTRIC WITHSTANDING VOLTAGE IS PERFORMED.
4795	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4795 MEGOHM(S) AT HIGH HUMIDITY.
4805	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4805 MEGOHM(S) AFTER DRYING.
4813	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4813 MILLIAMPERE(S) AT HIGH HUMIDITY.
4803	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4803 MILLIAMPERE(S) AFTER DRYING.
4788	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

~HARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-1344, METHOD 1002.	2520
PROCEDURE TYPE (SELECT ONE)	
TYPE I.	2522
DuRATION OF POLARIZING VOLTAGE (HOURS)	4790
TYPE II.	2524
STEP 7A NOT REQUIRED.	2526
TYPE III.	2528
STEP 7A NOT REQUIRED.	2530
POLARIZING VOLTAGE (VOLTS DC)	4793
POLARIZING VOLTAGE BETWEEN ALTERNATE CONTACTS CONNECTED ELECTRICALLY AND OTHER CONTACTS AND SHELL CONNECTED ELECTRICALLY.	2532
SPECIMEN (SELECT ONE)	
MATED, WIRED CONNECTORS.	2534
INDIVIDUAL, WIRED CONNECTORS.	2536
WIRE (SIZE)	2538
WIRE (TYPE)	2540

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2520	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1002 OF MIL-STD-1344.
2522	PROCEDURE TYPE I SHALL APPLY.
4790	POLARIZING VOLTAGE SHALL BE APPLIED FOR 4790 HOUR(S).
2524	PROCEDURE TYPE II SHALL APPLY.
2526	STEP 7A SHALL NOT APPLY.
2528	PROCEDURE TYPE III SHALL APPLY.
2530	STEP 7A SHALL NOT APPLY.
4793	Polarizing VOLTAGE SHALL BE 4793 VOLTS DC.
2532	POLARIZING VOLTAGE SHALL BE APPLIED BETWEEN ALTERNATE CONTACTS CONNECTED TOGETHER ELECTRICALLY AND THE REMAINING CONTACTS AND SHELL CONNECTED ELECTRICALLY.
2534	MATED, WIRED CONNECTORS SHALL BE TESTED.
2536	INDIVIDUAL, WIRED CONNECTORS SHALL BE TESTED*
2538	CONTACTS SHALL BE WIRED WITH SIZE 2538 WIRE.
2540	WIRE TYPE SHALL BE 2540.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
PER MIL-STD-1344, METHOD 1002. (CONT)	
DIELECTRIC WITHSTANDING VOLTAGE (SELECT ONE)	
(VOLTS AC)	2542
(VOLTS DC)	2544
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	2546
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER REMOVAL FROM CHAMBER.	2548
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1380
AS FOLLOWS:	6359
*MINIMUM INSULATION RESISTANCE (SELECT ONE)	
SINGLE TEST	
(MEGOHMS)	1386
MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	1384
*SECOND TEST (MEGOHMS)	1387

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2542	THE DIELECTRIC WITHSTANDING VOLTAGE SHALL BE 2542 VOLTS AC.
2544	THE DIELECTRIC WITHSTANDING VOLTAGE SHALL BE 2544 VOLTS DC.
2546	PERFORM DIELECTRIC WITHSTANDING VOLTAGE AT HIGH HUMIDITY.
2548	PERFORM DIELECTRIC WITHSTANDING VOLTAGE AFTER REMOVAL FROM THE CHAMBER.
1380	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.
6359	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1386	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 1386 MEGOHM(S).
1384	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1384 MEGOHM(S) AT THE FIRST TEST TEMPERATURE.
1387	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1387 MEGOHM(S) AT THE SECOND TEST TEMPERATURE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
AS FOLLOWS: (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE.	1407
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1371
PER MIL-STD-1344, METHOD 3003.	2550
TEST VCILTAGE (VOLTS, DC)	1373
ELECTRIFICATION TIME (SECONDS)	1376
h'AXIMUM MEASUREMENT ERROR AT REQUIRED VALUE (PERCENT)	11377
SPECIAL PREPARATIONS OR CONDITIONS PER DOCUMENT (DOC DES)	1520
FIRST TEST TEMPERATURE (DEGREES CELSIUS)	1372
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	1381
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1383
TEST SPECIMEN (SELECT ONE)	
CONNECTOR MATED PAIR.	2552
UNMATED CONNECTOR.	2554
SPECIAL PREPARATIONS ____	2556

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1407	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1371	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT ~~1371.~~
2550	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3003 OF MIL-STD-1344.
1373	TEST POTENTIAL SHALL BE 1373 VOLTS, DC.
1376	ELECTRIFICATION DURATION SHALL BE 1376 SECOND(S).
1377	THE MEASUREMENT ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1377 PERCENT.
1520	SPECIAL PREPARATIONS OR CONDITIONS SHALL BE IN ACCORDANCE WITH 1520.
1372	FIRST TEST TEMPERATURE SHALL BE 1372 DEGREES CELSIUS.
1381	SECOND TEST TEMPERATURE SHALL BE 1381 DEGREES CELSIUS.
1383	TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1383 DEGREES CELSIUS.
2552	TEST SPECIMEN SHALL BE A CONNECTOR MATED PAIR.
2554	TEST SPECIMEN SHALL BE AN UNMATED CONNECTOR.
2556	SPECIAL PREPARATIONS SHALL BE 2556.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LOW-SIGNAL LEVEL CONTACT RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2012
MAXIMUM VOLTAGE DROP (MILLIVOLTS)	2558
MAXIMUM CONTACT RESISTANCE (OHMS)	2014
MAXIMUM CHANGE IN READING (PERCENT)	2560
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2004
PER MIL-STD-1344, METHOD 3002.	2006
WIRE (SIZE)	2008
MINIMUM CONTACT INTERFACE (PERCENT)	2562
MAGNETIC PERMEABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1669
MAXIMUM PERMEABILITY (MU)	1670

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2012	LOW-SIGNAL LEVEL CONTACT RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT? EXCEPT ~~2012~~.
2558	LOW-SIGNAL LEVEL CONTACT RESISTANCE. THE VOLTAGE DROP SHALL BE NOT GREATER THAN 2558 MILLIVOLT(S).
20L4	LOW-SIGNAL LEVEL CONTACT RESISTANCE. THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2014 OHM(S).
2560	CONTACT RESISTANCE (VOLTAGE DROP) SHALL VARY NOT GREATER THAN 2560 PERCENT FROM ONE READING TO ANOTHER OR FROM THE READING AT NOMINAL CURRENT.
2004	LOW-SIGNAL LEVEL CONTACT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2004.
2006	LOW-SIGNAL LEVEL CONTACT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3002 OF MIL-STD-1344.
2008	CONTACTS SHALL BE WIRED WITH SIZE ~~2008~~ WIRE.
2562	CONTACT INTERFACE SHALL BE NOT LESS THAN ~~2562~~ PERCENT OF NOMINAL INTERFACE DIMENSION.
1669	MAGNETIC PERMEABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT ~~1669~~.
1670	MAGNETIC PERMEABILITY. THE PERMEABILITY SHALL BE NOT GREATER THAN 1670 MU.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAGNETIC PERMEABILITY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1662
PER MIL-STD-1344, METHOD 3006.	2564
TEST SPECIMEN (SELECT ONE)	
FULLY ASSEMBLED CONNECTOR.	2566
UNMATED CONNECTOR WITHOUT CONTACTS.	2568
CONNECTOR CONTACTS.	2570
MAINTENANCE AGING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1636
AS FOLLOWS:	2572
MAXIMUM INSERTION FORCE (SELECT ONE)	
(POUNDS)	2574
(NEWTONS)	2576
MAXIMUM REMOVAL FORCE (SELECT ONE)	
(POUNDS)	1640
(NEWTONS)	2578

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1662	MAGNETIC PERMEABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1662.
2564	MAGNETIC PERMEABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3006 OF MIL-STD-1344.
2566	TEST SPECIMEN SHALL BE A FULLY ASSEMBLED CONNECTOR.
2568	TEST SPECIMEN SHALL BE AN UNMATED CONNECTOR WITHOUT CONTACTS.
2570	TEST SPECIMEN SHALL BE THE CONNECTOR CONTACT(S).
1636	MAINTENANCE AGING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1636.
2572	MAINTENANCE AGING. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2574	THE INSERTION FORCE SHALL BE NOT GREATER THAN 2574 POUND(S) AFTER TEST INSERTIONS AND WITHDRAWALS.
2576	THE INSERTION FORCE SHALL BE NOT GREATER THAN 2576 NEWTON(S) AFTER TEST INSERTIONS AND WITHDRAWALS.
1640	THE REMOVAL FORCE SHALL BE NOT GREATER THAN 1640 POUND(S) AFTER TEST INSERTIONS AND WITHDRAWALS.
2578	THE REMOVAL FORCE SHALL BE NOT GREATER THAN 2578 NEWTON(S) AFTER TEST INSERTIONS AND WITHDRAWALS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAINTENANCE AGING (CONT)	
AS FOLLOWS: (CONT)	
MINIMUM REMOVAL FORCE (SELECT ONE)	
(POUNDS)	1638
(NEWTONS)	2580
MEET CONNECTOR MATING AND UNMATING FORCE REQUIREMENTS.	2582
MEET CONTACT RETENTION REQUIREMENTS.	2584
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1624
PER MIL-STD-1344, METHOD 2002.	2586
INSERTION TOOL (TYPE)	2588
REMOVAL TOOL (TYPE)	2590
WIRE (SIZE)	2592
WIRE (DOC DES)	2594
MATING AND UNMATING FORCES	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1682

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1638	THE REMOVAL FORCE SHALL BE NOT LESS THAN 1638 POUND(S) AFTER TEST INSERTIONS AND WITHDRAWALS.
2580	THE REMOVAL FORCE SHALL BE NOT LESS THAN 2580 NEWTON(S) AFTER TEST INSERTIONS AND WITHDRAWALS.
2582	CONNECTORS SHALL MEET MATING AND UNMATING FORCE REQUIREMENT(S) AFTER TEST INSERTIONS AND WITHDRAWALS.
2584	CONNECTORS SHALL MEET CONTACT RETENTION REQUIREMENT(S) AFTER TEST INSERTIONS AND WITHDRAWALS.
1624	MAINTENANCE AGING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1624.
2586	MAINTENANCE AGING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2002 OF MIL-STD-1344.
2588	THE TYPE OF INSERTION TOOLS SHALL BE 2588.
2590	THE TYPE OF REMOVAL TOOLS SHALL BE 2590.
2592	CONTACT SHALL BE WIRED WITH SIZE 2592 WIRE.
2594	WIRE SHALL BE IN ACCORDANCE WITH 2594.
1682	MATING AND UNMATING FORCES. THE REQUIREMENT(S) SHALL BE IN ACCRDANCE WITH THE BASE DOCUMENT, EXCEPT 1682.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MATING AND UNMATING FORCES (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	2596
MAXIMUM MATING FORCE (SELECT ONE)	
(POUNDS)	1688
(NEWTONS)	2598
MAXIMUM UNMATING FORCE (SELECT ONE)	
(POUNDS)	2600
(NEWTONS)	2602
MINIMUM UNMATING FORCE (SELECT ONE)	
(POUNDS)	1690
(NEWTONS)	2604
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1674
PER MIL-STD-1344, METHOD 2013.	2606
MATING RATE (SELECT ONE)	
GRADUAL.	2608

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2596	MATING AND UNMATING FORCES. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1688	THE FORCE REQUIRED TO MATE CONNECTORS SHALL BE NOT GREATER THAN 1688 POUND(S).
2598	THE FORCE REQUIRED TO MATE CONNECTORS SHALL BE NOT GREATER THAN 2598 NEWTON(S),
2600	THE FORCE REQUIRED TO UNMATE CONNECTORS SHALL BE NOT GREATER THAN 2600 POUND(S).
2602	THE FORCE REQUIRED TO UNMATE CONNECTORS SHALL BE NOT GREATER THAN 2602 NEWTON(S).
1690	THE FORCE REQUIRED TO UNMATE CONNECTORS SHALL BE NOT LESS THAN 1690 POUNDS.
2604	THE FORCE REQUIRED TO UNMATE CONNECTORS SHALL BE NOT LESS THAN 2604 NEWTON(S).
1674	MATING AND UNMATING FORCES. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1674.
2606	MATING AND UNMATING FORCES. TESTING SHALL BE PERFORMED IN rCORDANCE WTIH METHOD 2013 OF MIL-STD-IJ344.
2608	CONNECTORS SHALL BE GRADUALLY MATED AND UNMATED.

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MATING AND UNMATING FORCES (CONT)	
MATING RATE (CONT)	
(INCHES PER MINUTE)	2610
(MILLIMETERS PER MINUTE)	2612
PREMEASUREMENT MATING AND UNMATING CYCLES (QUANTITY)	2614
OVERSIZE PIN EXCLUSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1738
NO ENTRY OF TEST PIN.	1740
MEET CONTACT RESISTANCE REQUIREMENT.	2616
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1732
POSITION STEEL PIN.	2618
APPLIED FORCE (SELECT ONE)	
(POUNDS)	2620
(NEWTONS)	2622

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2610	CONNECTOR SHALL BE "MATED AND UNMATED AT A RATE NOT GREATER THAN 2610 INCH(S) PER MINUTE.
2612	CONNECTOR SHALL BE MATED AND UNMATED AT A RATE NOT GREATER THAN 2612 MILLIMETER(S) PER MINUTE.
2614	PRIOR TO MEASUREMENTS CONNECTORS SHALL BE MATED AND UNMATED 2614 TIMES.
1738	OVERSIZE PIN EXCLUSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1738.
1740	OVERSIZE PIN EXCLUSION. THE SOCKETS SHALL EXCLUDE THE ENTRY OF THE TEST PIN.
2616	THE CONTACTS SHALL MEET CONTACT RESISTANCE REQUIREMENT AFTER TEST.
1732	OVERSIZE PIN EXCLUSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1732.
2618	OVERSIZE PIN EXCLUSION. TESTING SHALL BE PERFORMED WITH A HARDENED STEEL PIN PLACED IN A POSITION TO ENTER THE SOCKET BORE.
2620	AN AXIAL FORCE OF 2620 POUND(S) SHALL BE APPLIED TENDING TO FORCE THE PIN INTO THE SOCKET.
2622	AN AXIAL FORCE OF 2622 NEWTON(S) SHALL BE APPLIED TENDING TO FORCE THE PIN INTO THE SOCKET.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OVERSIZE PIN EXCLUSION (CONT)	
POSITION STEEL PIN. (CONT)	
PIN DIAMETER (SELECT ONE)	
(INCH)	2624
(MILLIMETERS)	2626
CONTACTS TESTED (PERCENT)	2628
PIN CONTACT INSERTION FORCE (OVERSTRESS)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1798
NO EVIDENCE OF PHYSICAL DAMAGE.	2630
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1790
PER MIL-C-21097.	2632
APPLIED AXIAL FORCE (SELECT ONE)	
(POUNDS)	1794
(NEWTONS)	2634
PROBE DAMAGE (CONTACTS)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2070

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2624 PIN OUTSIDE DIAMETER SHALL BE 2624 INCH.

2626 PIN OUTSIDE DIAMETER SHALL BE 2626 MILLIMETER(S).

2628 TEST SHALL BE PERFORMED ON NOT LESS THAN 2628 PERCENT OF THE SOCKET CONTACTS.

1798 PIN CONTACT INSERTION FORCE (OVERSTRESS). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1798.

2630 PIN CONTACT INSERTION FORCE (OVERSTRESS). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

1790 PIN CONTACT INSERTION FORCE (OVERSTRESS). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT ~~1790~~.

2632 PIN CONTACT INSERTION FORCE (OVERSTRESS). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-2L097.

1794 APPLIED AXIAL FORCE SHALL BE 1794 POUND(S).

2634 APPLIED AXIAL FORCE SHALL BE 2634 NEWTON(S).

2070 PROBE DAMAGE (CONTACTS). THE REQUIREMENTS) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2070.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PROBE DAMAGE (CONT)	
REQUIREMENTS (CONT)	
MINIMUM CONTACT SEPARATION FORCE (POUNDS)	2636
MINIMUM CONTACT SEPARATION FORCE (NEWTONS)	2638
MEET CONTACT RESISTANCE REQUIREMENTS	2640
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2062
PER MIL-STD-1344, METHOD 2006.	2642
HOLDING DEVICE (SELECT ONE)	
COLLET.	2067
CONNECTOR.	2066
PROBE DEPTH (SELECT ONE)	
ONE HALF SOCKET BORE.	2644
THREE QUARTERS SOCKET BORE.	2646
ONE HALF AND THREE QUARTERS SOCKET BORE.	2648
SOCKETS TESTED (QUANTITY)	2650

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2636 PROBE, DAMAGE (CONTACTS). THE CONTACT SEPARATION FORCE AFTER TEST SHALL BE NOT LESS THAN 2636 POUND(S).

2638 PROBE DAMAGE (CONTACTS). THE CONTACT SEPARATION FORCE AFTER TEST SHALL BE NOT LESS THAN 2638 NEWTON(S).

2640 CONTACTS SHALL MEET CONTACT RESISTANCE REQUIREMENT(S) AFTER TEST.

2062 PROBE DAMAGE (CONTACTS). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT ~~2062.~~

2642 PROBE DAMAGE (CONTACTS). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2006 OF MIL-STD-1344.

2067 COLLET TYPE CONTACT HOLDING DEVICE SHALL BE USED.

2066 A CONNECTOR SHALL BE USED TO RETAIN THE SOCKET CONTACT(S).

2644 PROBE DEPTH SHALL BE ONE HALF OF SOCKET BORE NOMINAL DEPTH.

2646 PROBE DEPTH SHALL BE THREE QUARTERS OF SOCKET BORE NOMINAL DEPTH.

2648 PROBE DEPTHS SHALL BE ONE HALF AND THREE QUARTERS OF SOCKET BORE NOMINAL DEPTH.

2650 THERE SHALL BE 2650 SOCKETS TESTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT SPRAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4078
NO EVIDENCE OF EXCESSIVE CORROSION, WARPING OR CRACKING.	2652
NO INCREASE IN FORCE TO ENGAGE AND DISENGAGE.	2654
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4770
PER MIL-STD-1344, METHOD 1001.	2656
*TEST CONDITION (LETTER)	4772
MOUNTING (SELECT ONE)	
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4773
MOUNTING SHALL BE BY NORMAL METHOD,	4765
MOUNTING SHALL BE BY ANY SUITABLE METHOD.	4766

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4878	SALT SPRAY, THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4878.
2652	SALT SPRAY. THERE SHALL BE NO EVIDENCE OF EXCESSIVE CORROSION. EXCESSIVE CORROSION IS DEFINED AS THAT WHICH INTERFERES WITH THE ELECTRICAL OR MECHANICAL PERFORMANCE, OR IN THE CASE OF PLATED METAL, CORROSION WHICH HAS PASSED THROUGH THE PLATING AND ATTACKED THE BASE METAL. THERE SHALL BE NO WARPING, CRACKING OR OTHER DAMAGE.
2654	THERE SHALL BE NO INCREASE IN FORCE REQUIRED TO ENGAGE AND DISENGAGE MATING CONNECTORS.
4770	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4770.
2656	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1001 OF MIL-STD-1344.
4772	TEST CONDITION LETTER 4772 SHALL APPLY.
4773	MOUNTING SHALL BE IN ACCORDANCE WITH 4773.
4765	MOUNTING SHALL BE BY THE NORMAL METHOD.
4766	MOUNTING SHALL BE BY ANY SUITABLE METHOD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, HIGH IMPACT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1494
NO EVIDENCE OF PHYSICAL DAMAGE.	1495
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY DURING TESTo	1451
MAXIMUM DISCONTINUITY (MICROSECONDS)	2658
NO DISENGAGEMENT OR LOOSENING,	2660
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1486
PER MIL-STD-202, METHOD 207,	1482
*MOUNTING FIXTURE (SELECT ONE)	
FIGURE NUMBER FPOM METHOD 207 OF MIL-STD-202 (NUMBER)	1488
ANY SUITABLE MO(JNTING FIXTURE,	1478
MOUNTING FIXTURE PER DOCUMENT (DOC DES)	1468
SPECIMEN (SELECT ONE)	
WIRED, MATED PAIR.	2662

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1494	SHOCK, HIGH IMPACT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, ExCEPT 1494.
1495	SHOCK, HIGH IMPACT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1451	THERE SHALL BE NO DISCONTINUITY DURING THE TEST.
2658	DISCONTINUITY DURING TEST SHALL BE NOT GREATER THAN 2658 MICROSECOND(S)
2660	THERE SHALL BE NO DISENGAGEMENT OR LOOSENING OF THE CONNECTOR.
1486	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1486.
1482	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 207 OF MIL-STD-202.
1488	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH FIGURE 1488 OF METHOD 207 OF MIL-STD-202.
3478	THE MOUNTING FIXTURE SHALL BE ANY SUITABLE MOUNTING FIXTURE.
1468	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH 1468.
2662	TEST SPECIMEN SHALL BE A WIRE CONNECTOR MATED PAIR.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, HIGH IMPACT (CONT)	
SPECIMEN (CONT)	
WIRED, UNMATED CONNECTOR	2664
MAXIMUM LOAD (MILLIAMPERES)	2666
SHOCK, SPECIFIED PULSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1508
NO EVIDENCE OF PHYSICAL DAMAGE.	1509
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY DURING TEST.	1471
MAXIMUM (MILLISECONDS)	2668
MAXIMUM (MICROSECONDS)	2670
NO DISENGAGEMENT OR LOOSENING.	2672
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1502
PER MIL-STD-1344, METHOD 2004.	2674
*TEST CONDITION (LETTER)	1504

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2664	TEST SPECIMEN SHALL BE A WIRED UNMATED CONNECTOR.
2666	ELECTRICAL LOAD SHALL BE A CURRENT NOT GREATER THAN 2842 MILLIAMPERE(S).
1508	SHOCK, SPECIFIED PULSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1508.
1509	SHOCK, SPECIFIED PULSE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1471	THERE SHALL BE NO DISCONTINUITY DURING THE TEST.
2668	DISCONTINUITY DURING TEST SHALL BE NOT GREATER THAN 2668 MILLISECOND(S).
2670	DISCONTINUITY DURING TEST SHALL BE NOT GREATER THAN 2670 MICROSECOND(S).
2672	THERE SHALL BE NO DISENGAGEMENT OR LOOSENING OF THE CONNECTOR.
1502	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1502.
2674	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2004 OF MIL-STD-1344. TEST CONDITION LETTER 1504 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, SPECIFIED PULSE (CONT)	
PER MIL-STD-1344, METHOD 2004. (CONT)	
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	4686
NORMAL MOUNTING METHOD.	4685
MOUNT PER DOCUMENT (DOC DES)	4684
SPECIMEN (SELECT ONE)	
WIRED, MATED PAIR.	2676
WIRED, UNMATED CONNECTOR.	2678
MAXIMUM LOAD (MILLIAMPERES)	2680
SOLDERABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4674
NO EVIDENCE OF PHYSICAL DAMAGE.	4675
MEET EVALUATION CRITERIA SPECIFIED IN METHOD 208 OF MIL-STD-202.	4672
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4662
PER MIL-STD-202, METHOD 208.	4683
NUMBER OF TERMINALS TO BE TESTED (QUANTITY)	4666

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4686	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4685	MOUNTING SHALL BE BY THE NORMAL METHOD.
4684	MOUNTING SHALL BE IN ACCORDANCE WITH 4684.
2676	TEST SPECIMEN SHALL BE A WIRED CONNECTOR MATED PAIR.
2678	TEST SPECIMEN SHALL BE A WIRED UNMATED CONNECTOR.
2680	ELECTRICAL LOAD SHALL BE A CURRENT NOT GREATER THAN 2680 MILLIAMPERE(S).
4674	SOLDERABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4674.
4675	SOLDERABILITY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4672	THE RESULTS OF THE SOLDERABILITY TEST SHALL BE IN ACCORDANCE WITH THE ACCEPTANCE CRITERIA OF METHOD 208 OF MIL-STD-202.
4662	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4662.
4683	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 208 OF MIL-STD-202.
4666	4666 TERMINATION(S) PER UNIT SHALL BE TESTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SOLDERABILITY (CONT)	
PER MIL-STD-202, METHOD 208. (CONT)	
DEPTH OF IMMERSION (SELECT ONE)	
(INCHES)	4667
(MILLIMETERS)	4663
DISTANCE WRAP WIRE APPLIED FROM BODY (SELECT ONE)	
(INCHES)	4664
(MILLIMETERS)	4665
SPECIAL PREPARATIONS PERMITTED.	6205
TEMPERATURE CYCLING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2682
NO EVIDENCE OF CRACKING OR OTHER DAMAGE.	2684
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	2686
(MILLIVOLTS)	2688
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2690

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4667	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4667 INCH(S).
4663	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4663 MILLIMETER(S).
4664	THE WRAP WIRE SHALL BE 4664 INCH(S) FROM THE BODY.
4665	THE WRAP WIRE SHALL BE 4665 MILLIMETER(S) FROM THE BODY.
6205	SPECIAL PREPARATION SHALL BE PERMITTED.
2682	TEMPERATURE CYCLING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2682.
2684	TEMPERATURE CYCLING. THERE SHALL BE NO EVIDENCE OF DAMAGE DETRIMENTAL TO THE OPERATION OF THE CONNECTOR.
2686	THE CONTACT RESISTANCE AFTER TEST SHALL BE NOT GREATER THAN 2686 OHM(S).
2688	THE CONTACT RESISTANCE AFTER TEST SHALL BE NOT GREATER THAN 2688 MILLIVOLT(S) DROP.
2690	TEMPERATURE CYCLING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2690.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE CYCLING (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-1344, METHOD 1003.	2692
*TEST CONDITION (LETTER)	4715
NUMBER OF CYCLES (QUANTITY)	4704
STEP 1 TEMPERATURE (DEGREES CELSIUS)	2694
PLUS TOLERANCE (DEGREES CELSIUS)	2696
MINUS TOLERANCE (DEGREES CELSIUS)	2698
STEP 3 TEMPERATURE (DEGREES CELSIUS)	2700
PLUS TOLERANCE (DEGREES CELSIUS)	2702
MINUS TOLERANCE (DEGREES CELSIUS)	2704
MINIMUM EXPOSURE DURATIONS (SELECT ONE)	
(HOURS)	2706
(MINUTES)	2708
SPECIMEN (SELECT ONE)	
WIRED, MATED PAIR.	2710
WIRED, UNMATED CONNECTOR.	2712

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD_ PARAGRAPH
2692	TEMPERATURE CYCLING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1003 OF MIL-STD-1344.
47115	TEST CONDITION LETTER 4715 SHALL APPLY.
4704	THERE SHALL BE 4704 CYCLES.
2694	THE STEP 1 TEMPERATURE SHALL BE 2694 DEGREES CELSIUS.
2696	THE STEP 1 POSITIVE TEMPERATURE TOLERANCE SHALL BE 2696 DEGREES CELSIUS.
2698	THE STEP 1 NEGATIVE TEMPERATURE TOLERANCE SHALL BE 2698 DEGREES CELSIUS.
2700	THE STEP 3 TEMPERATURE SHALL BE 2700 DEGREES CELSIUS.
2702	THE STEP 3 POSITIVE TEMPERATURE TOLERANCE SHALL BE 2702 DEGREES CELSIUS.
2704	THE STEP 3 NEGATIVE TEMPERATURE TOLERANCE SHALL BE 2704 DEGREES CELSIUS.
2706	THE STEPS 1 AND 3 EXPOSURE DURATIONS SHALL BE NOT LESS THAN 2706 HOUR(S).
2708	THE STEPS 1 AND 3 EXPOSURE DURATIONS SHALL BE NOT LESS THAN 2708 MINUTE(S).
2710	TEST SPECIMEN SHALL BE A WIRED CONNECTOR MATED PAIR.
2712	TEST SPECIMEN SHALL BE A WIRED UNMATED CONNECTOR.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4681
NO EVIDENCE OF PHYSICAL DAMAGE.	4682
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY.	1374
MAXIMUM DISCONTINUITY (SELECT ONE)	
(MILLISECONDS)	1545
(MICROSECONDS)	1546
NO LOOSENING OF HARDWARE.	2714
NO UNMATING.	2716
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1505
PER MIL-STD-1344, METH0D 2005.	2718
TEST CONDITION NUMBER I.	2720
DURATION EACH DIRECTION (HOURS)	2722
TEST CONDITION NUMBER II.	2724
TEST CONDITION NUMBER III.	2726

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4681	VIBRATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4681.
4682	VIBRATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1374	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1545	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1545 MILLISECOND(S).
1546	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1546 MICROSECOND(S).
2714	THERE SHALL BE NO LOOSENING OF HARDWARE.
2716	THERE SHALL BE NO UNINTENDED UNMATING OF CONNECTORS.
1505	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1505.
2718	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2005 OF MIL-STD-1344.
2720	TEST CONDITION NUMBER I SHALL APPLY.
2722	DURATION OF VIBRATION IN EACH DIRECTION SHALL BE 2722 HOUR(S).
2724	TEST CONDITION NUMBER II SHALL APPLY.
2726	TEST CONDITION NUMBER III SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTICS NAME	CHAR CODE
VIBRATION (CONT)	
PER MIL-STD-1344, METHOD 2005. (CONT)	
TEST CONDITION NUMBER IV.	2728
TEST CONDITION NUMBER V.	2730
TEST CONDITION (LETTER)	2732
MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	2734
PER DOCUMENT (DOC DES)	2736
DURATION PER AXIS (SELECT ONE)	
3 MINUTES.	2738
15 MINUTES.	2740
1.5 HOURS,	2742
8 HOURS.	2744
DIRECTION OF MOTION (SELECT ONE)	
PERPENDICULAR TO MATING PLANE.	2746
THREE MUTAULLY PERPENDICULAR.	2748
NUMBER OF TEST POINTS (QUANTITY)	2750
TEST POINTS ____	2752

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2728	TEST CONDITION NUMBER IV SHALL APPLY.
2730	TEST CONDITION NUMBER V SHALL APPLY.
2732	TEST CONDITION LETTER 2732 SHALL APPLY.
2734	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
2736	MOUNTING SHALL BE IN ACCORDANCE WITH 2736.
2738	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 3 MINUTES.
2740	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 15 MINUTES.
2742	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 1.5 HOURS.
2744	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 8 HOURS.
2746	THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE MATING PLANE OF THE CONNECTOR(S) IN NORMAL MOUNTING POSITION.
2748	THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUALLY PERPENDICULAR PLANES.
2750	THERE SHALL BE 2750 TEST POINT(S).
2752	TEST POINT(S) SHALL BE 2752.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION (CONT)	
PER MIL-STD-1344, METHOD 2005. (CONT)	
SPECIMEN (SELECT ONE)	
WIRED, MATED PAIR.	2778
WIRED, UNMATED CONNECTOR.	2780
ELECTRICAL LOAD (MILLIAMPERES)	2782
MONITOR FOR DISCONTINUITIES.	2784
METHOD FOR DETERMINING RESONANCE ____	2786
STORAGE CONDITIONS	
(YEARS)	1529
CERTIFY MAXIMUM CURE DATE TO DELIVERY (QUARTERS)	4942
CERTIFY MINIMUM SHELF LIFE AFTER DELIVERY (QUARTERS)	4943
CERTIFY MAXIMUM MANUFACTURE DATE TO DELIVERY (QUARTERS)	4944
AGE LIMITATION PER MIL-STD-1523.	5209

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2778	TEST SPECIMEN SHALL BE A WIRED CONNECTOR MATED PAIR.
2780	TEST SPECIMEN SHALL BE A WIRED UNMATED CONNECTOR.
2782	THE ELECTRICAL LOAD, ALL CONTACTS, SHALL BE NOT GREATER THAN 2782 MILLIAMPERE(S).
2784	CONNECTORS SHALL BE MONITORED FOR DISCONTINUITIES.
2786	THE METHOD FOR DETERMINING RESONANCE SHALL BE 2786.
	STORAGE CONDITIONS.
1529	ITEMS SHALL WITHSTAND 1529 YEARS OF STORAGE WHEN PROPERLY PRESERVED, PACKAGED AND MECHANICALLY PROTECTED WITHOUT REQuIRING MAJOR REPAIR.
4942	MANUFACTURER SHALL CERTIFY THAT THE CURE DATE SHALL BE NOT GREATER THAN 4942 QUARTERS PRIOR TO DELIVERY DATE.
4943	MANUFACTURER SHALL CERTIFY THAT THERE SHALL BE NOT LESS THAN 4943 QUARTERS OF SHELF LIFE AFTER DELIVERY.
4944	MANUFACTURER SHALL CERTIFY THAT THE DATE OF MANUFACTURE SHALL BE NOT GREATER THAN 4944 QUARTERS PRIOR TO DATE OF DELIVERY.
5209	AGE LIMITATIONS OF THE FINISHED PRODUCT SHALL BE IN ACCORDANCE WITH MIL-STD-1523.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	
WORKSHOP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A_____	7001
B_____	7002
C_____	7003
D_____	7004
E_____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDITIONAL REQUIREMENTS
7001	(A) 7001.
7002	(B) 7002.
7003	(c) 7003.
7004	(D) 7004.
7005	(E) 70050
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADDITIONAL PART MARKING	
A _____	6991
B _____	6992
c _____	6993
D _____	6994
E _____	6995
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI

(Project EDS-A253)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX A


ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

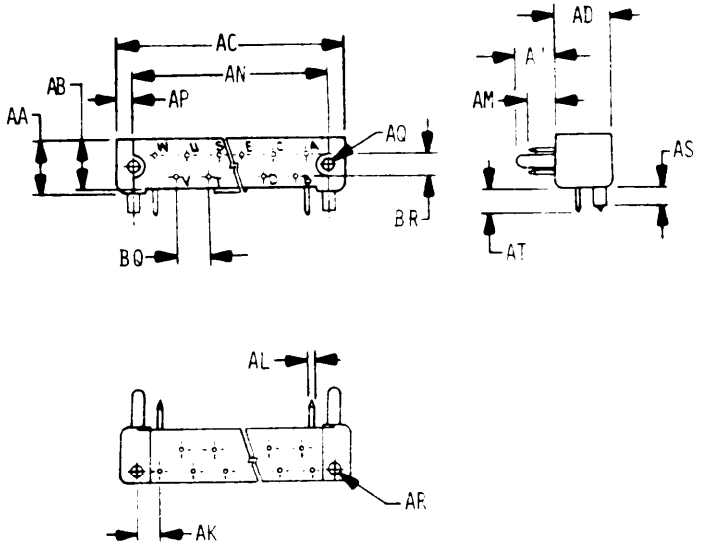


073-01-1

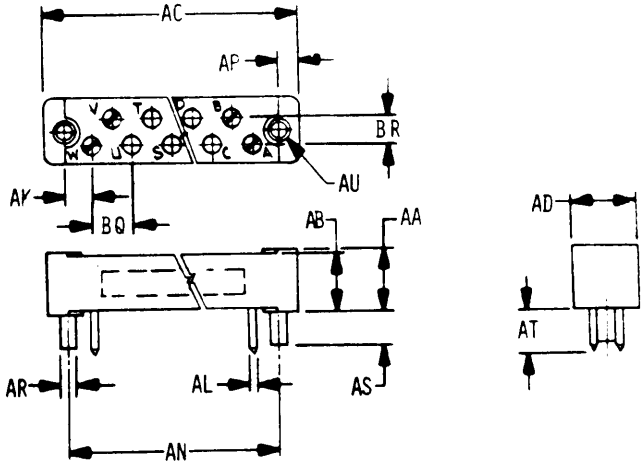


073-01-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

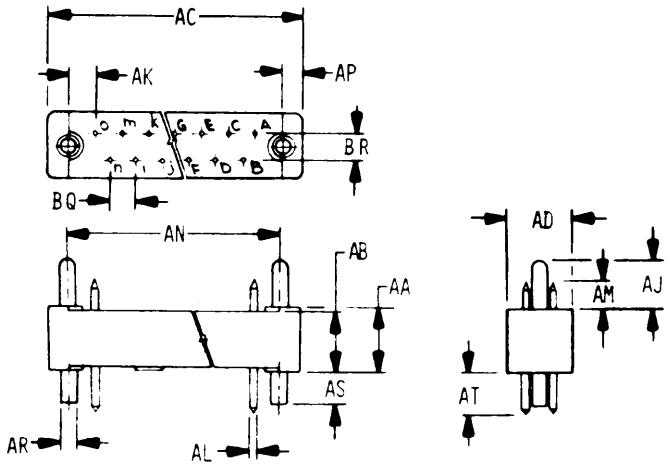


073-01-3

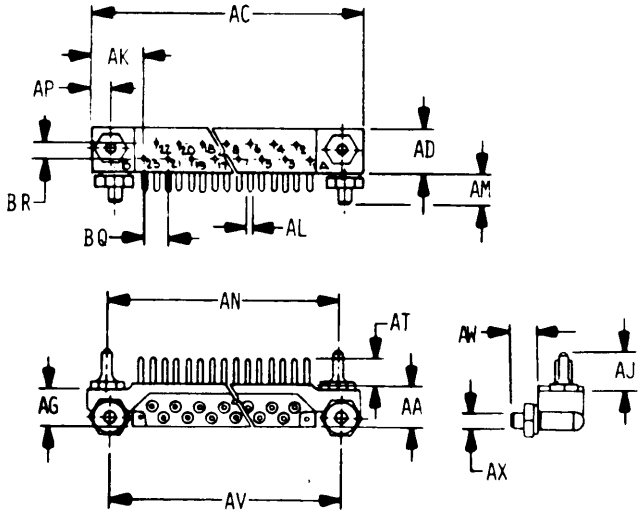


073-01-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

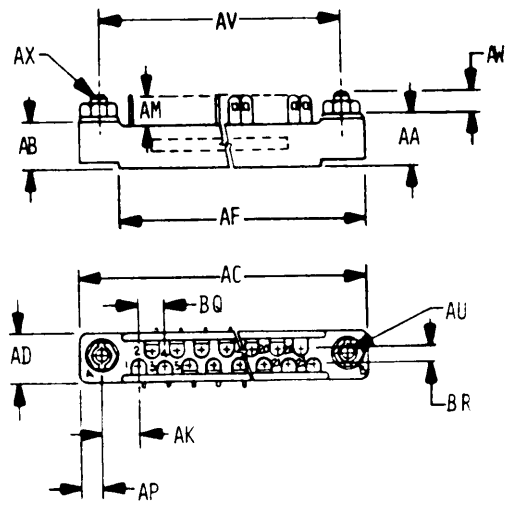


073-01-5

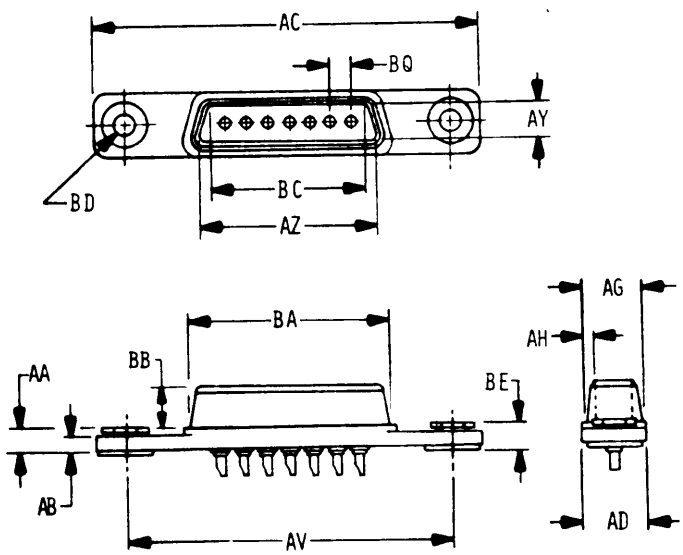


073-01-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

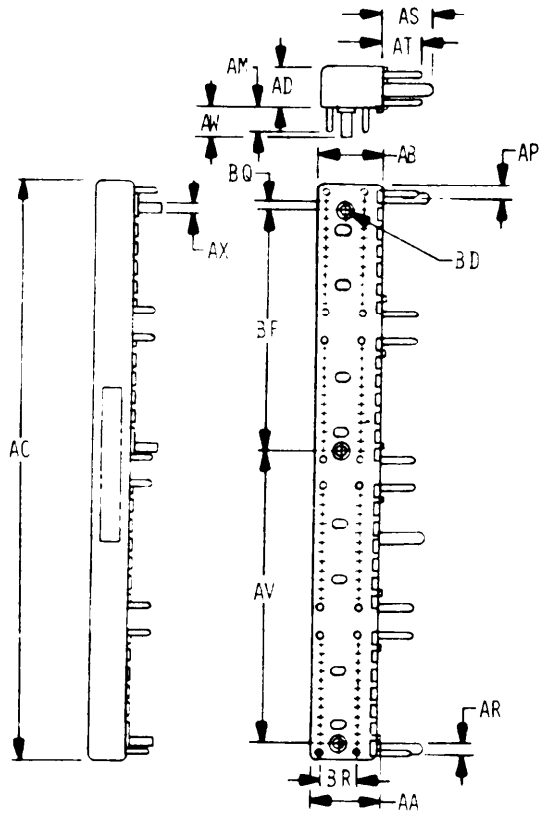


073-01-7


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

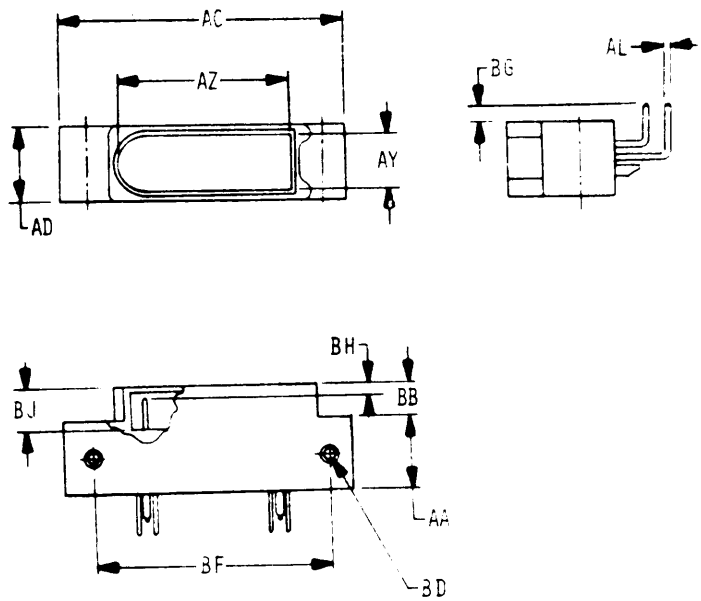

Ø73-Ø1-8

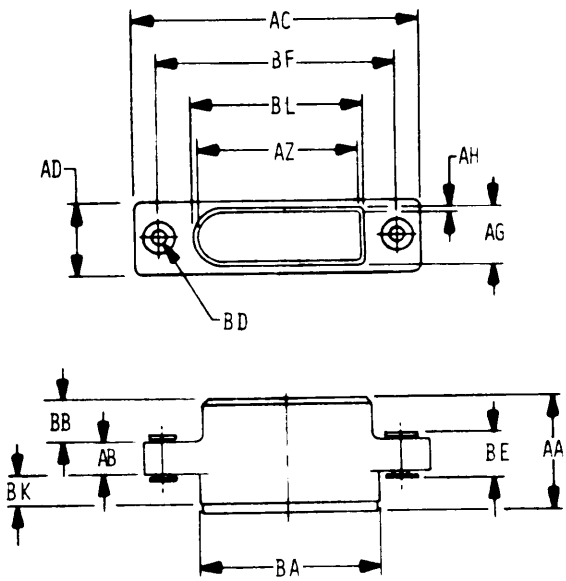


Source: https://assist.dla.mil -- Downloaded: 2026Ø-26T07:24Z
Check the source to verify that this is the current version before use.

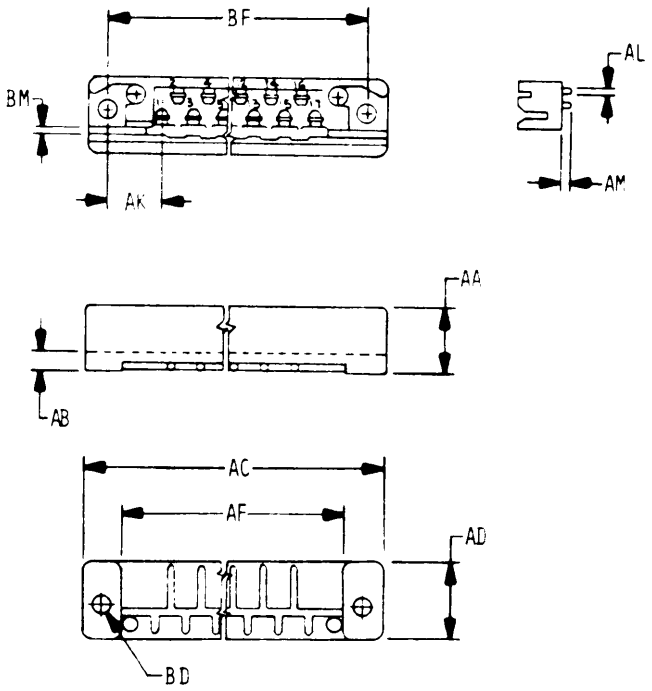


073-01-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

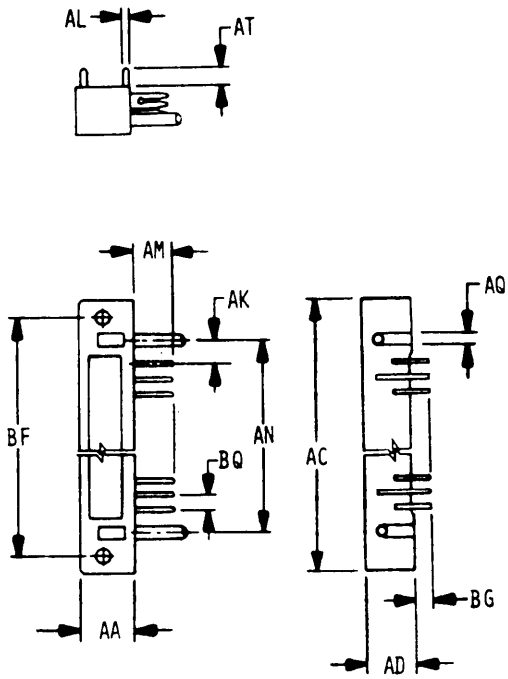


073-01-11

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

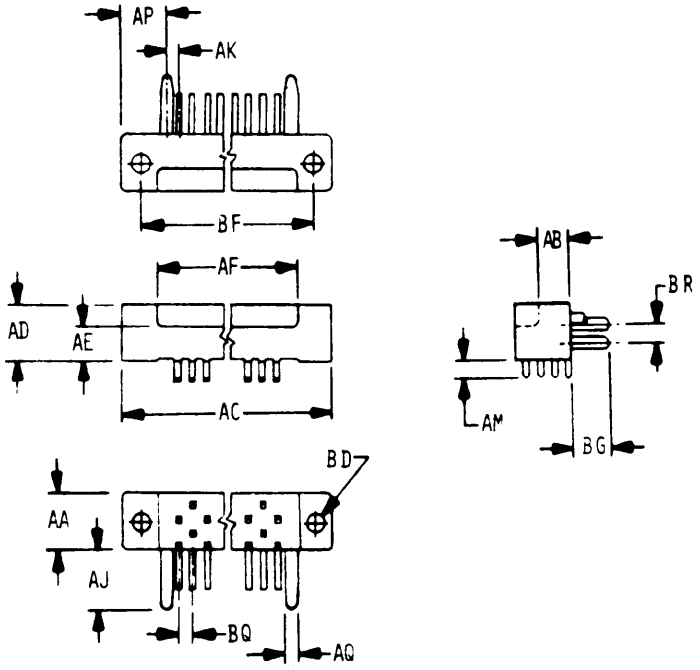


073-01-12

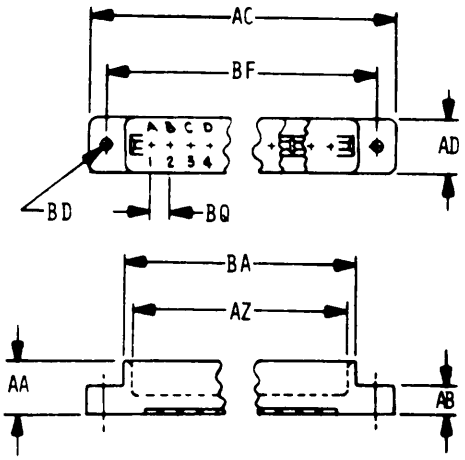


073-01-13


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

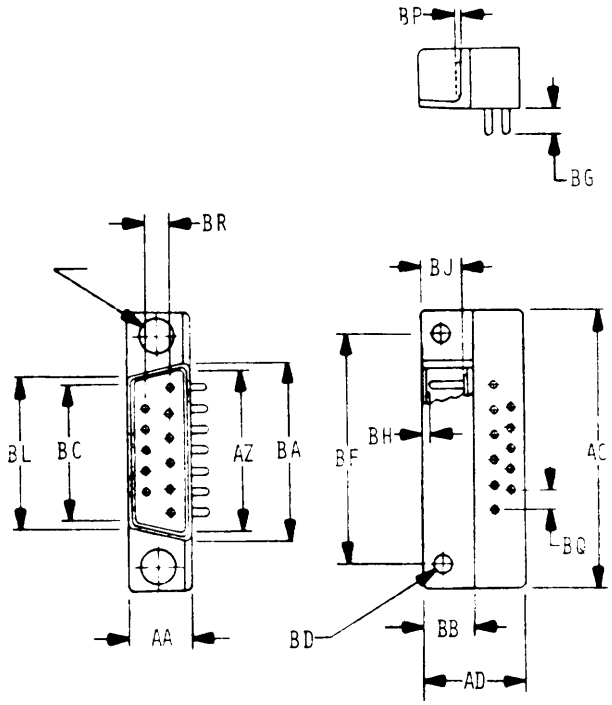


073-01-14

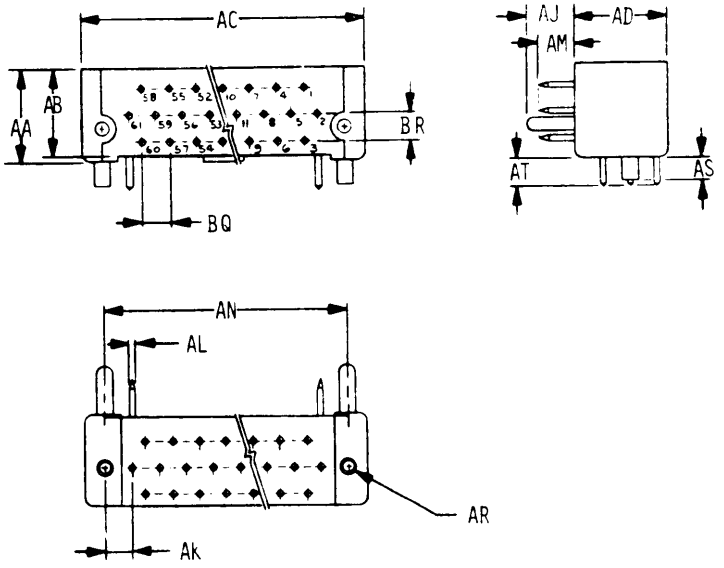

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

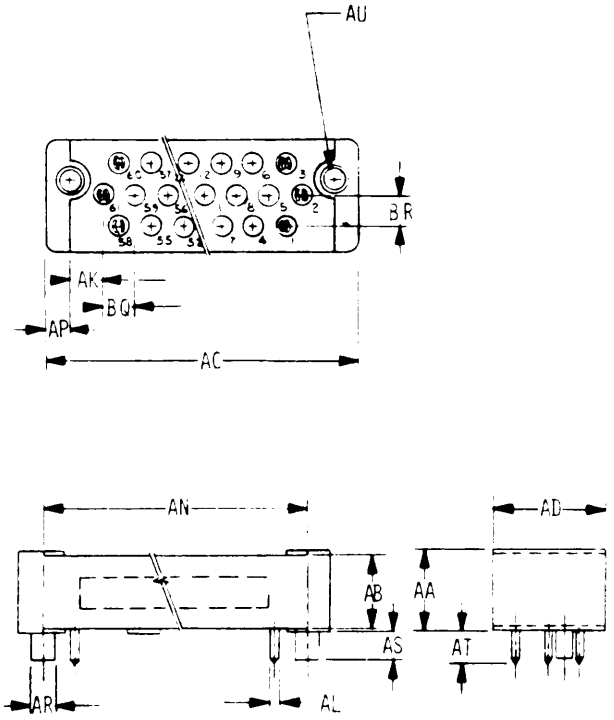


073-01-16

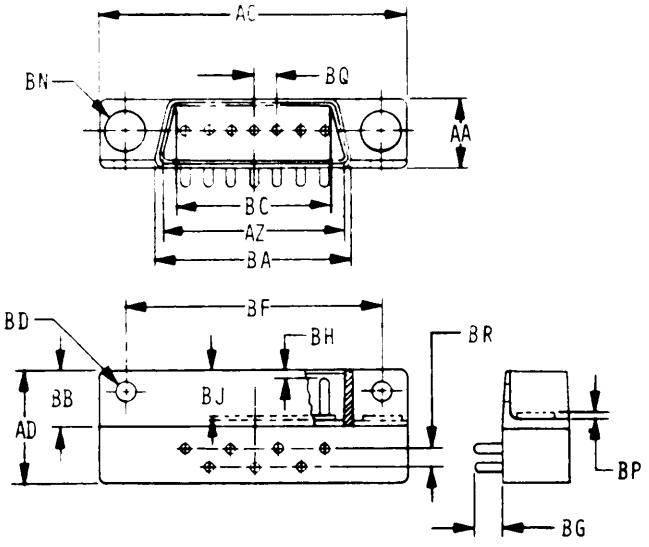


073-01-17

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

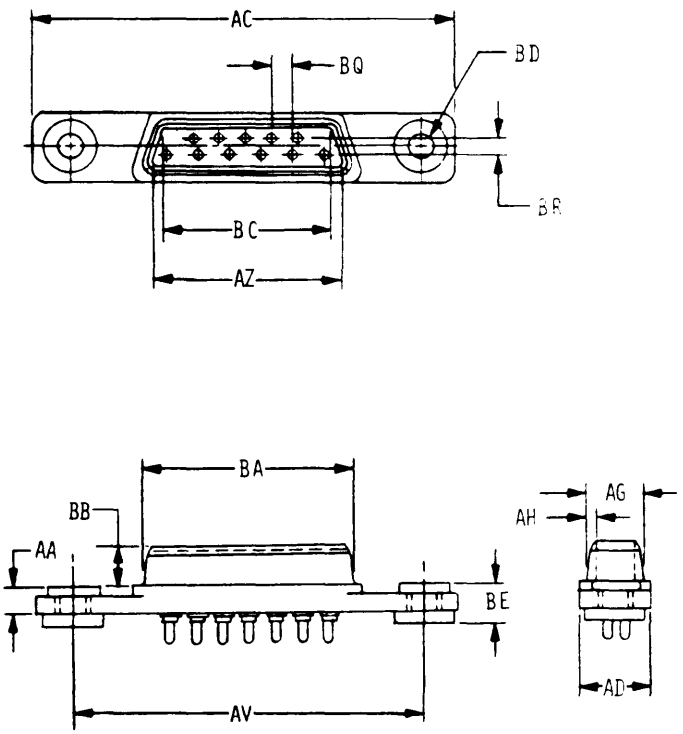


073-01-18

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

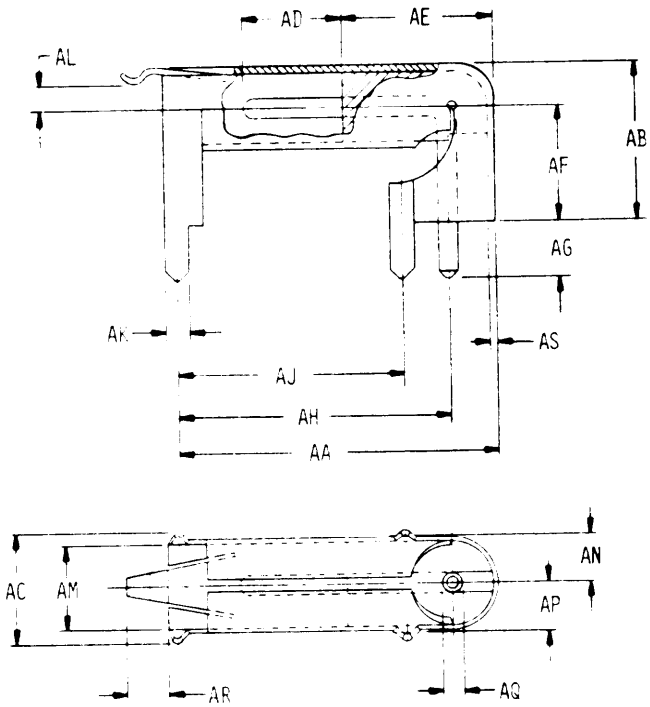


073-01-19

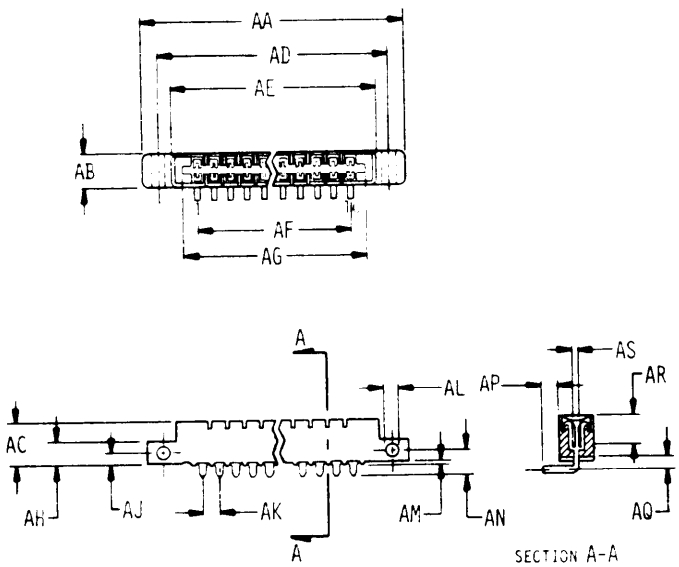


073-01-20

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

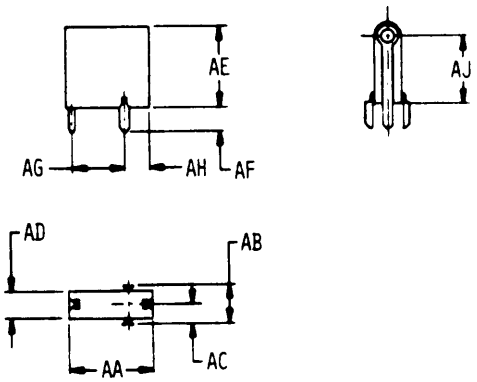


073-01-21

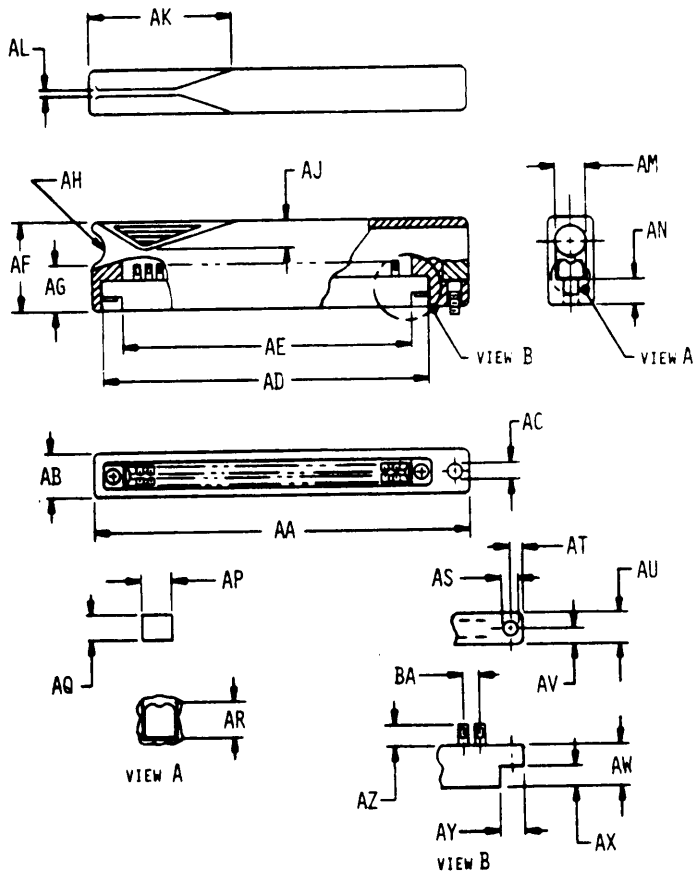


073-01-22

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

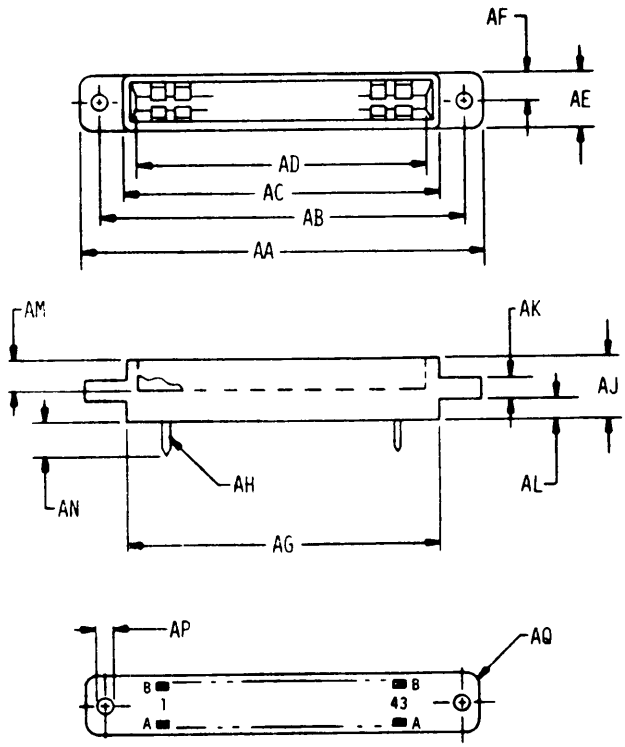


073-01-23

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

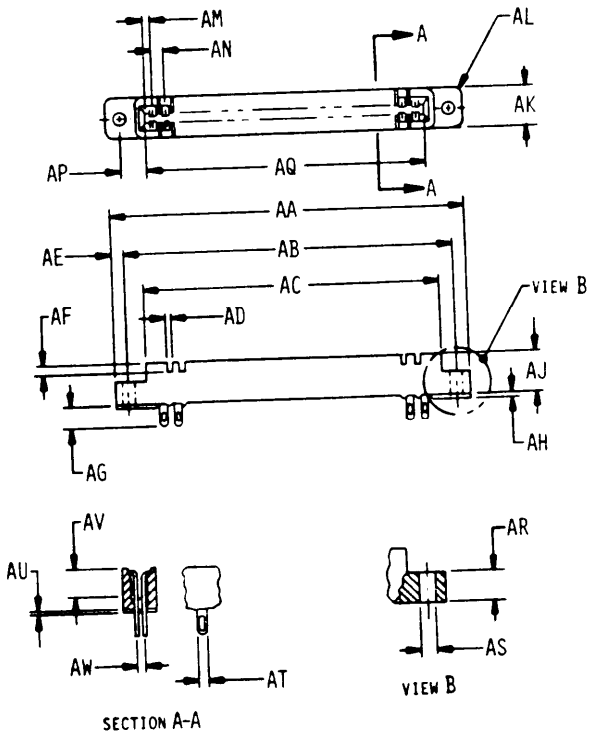


073-01-24

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

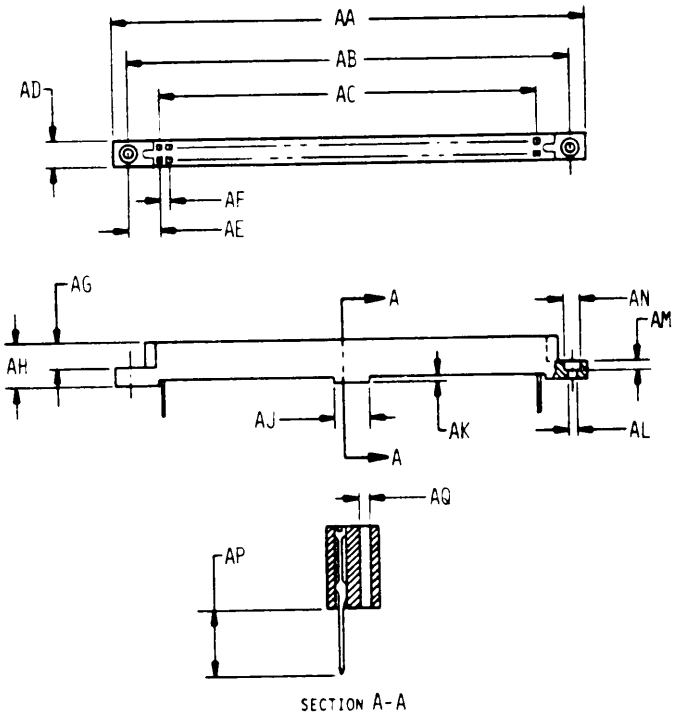


073-01-25

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

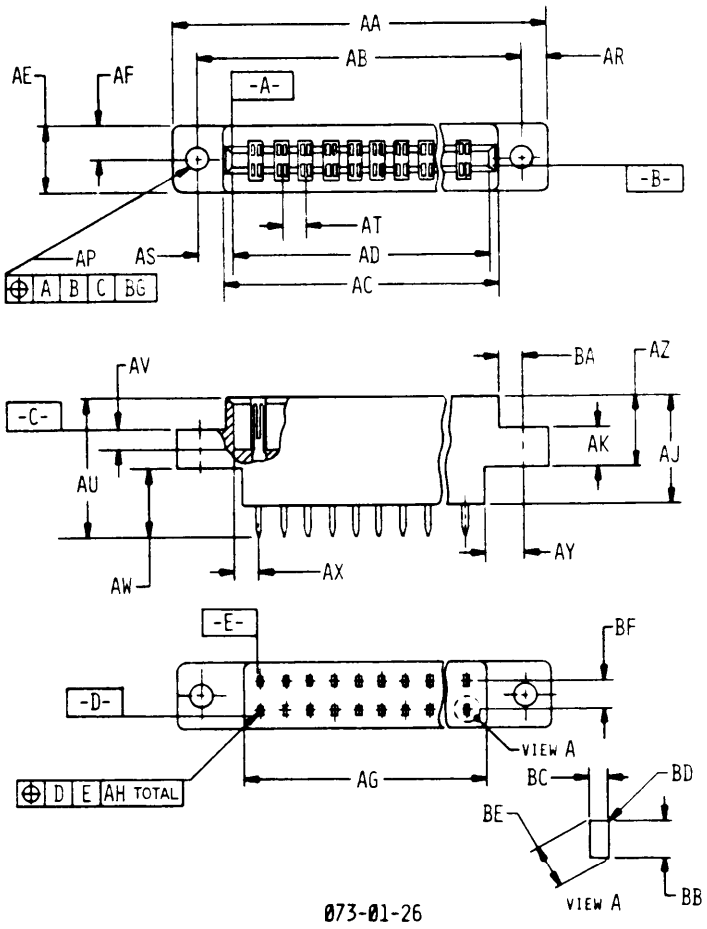


073-01-26

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

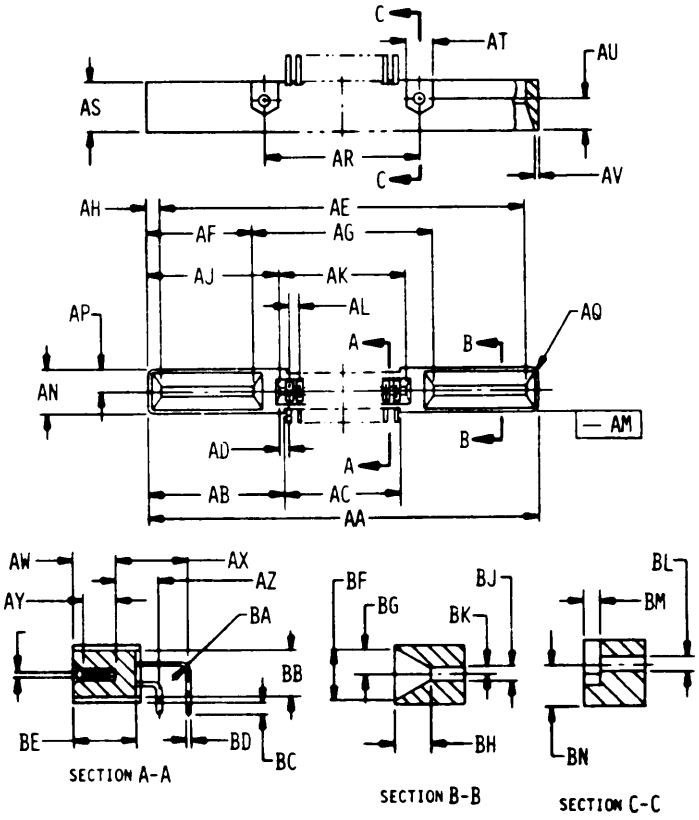


073-01-27

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

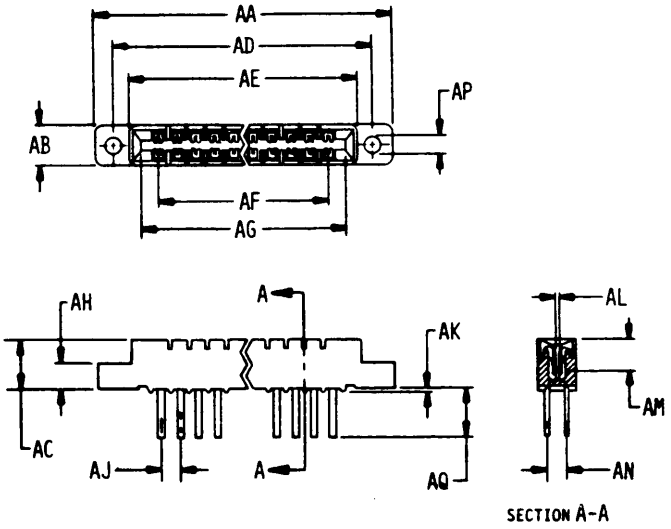


073-01-28

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

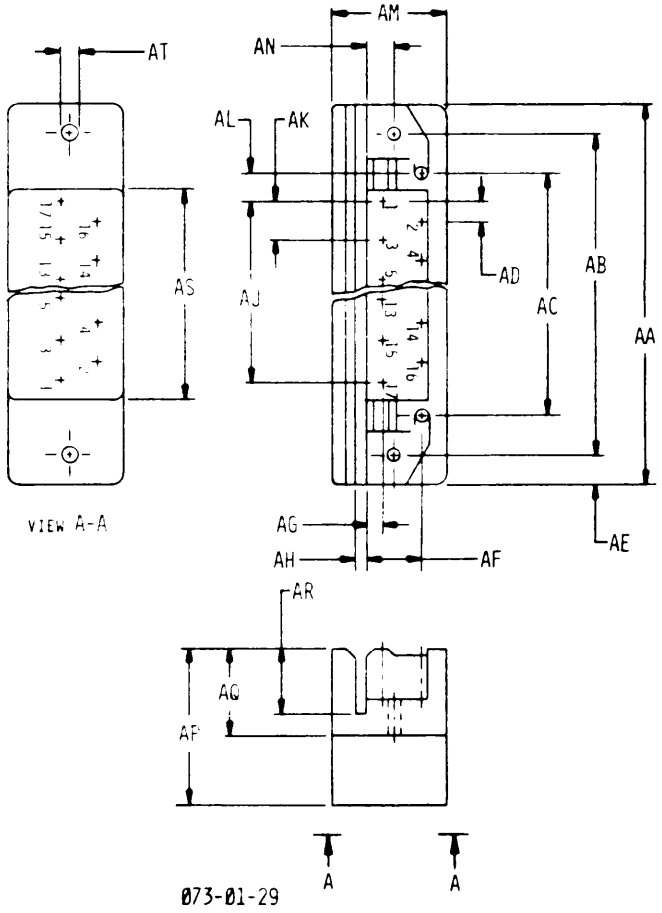


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

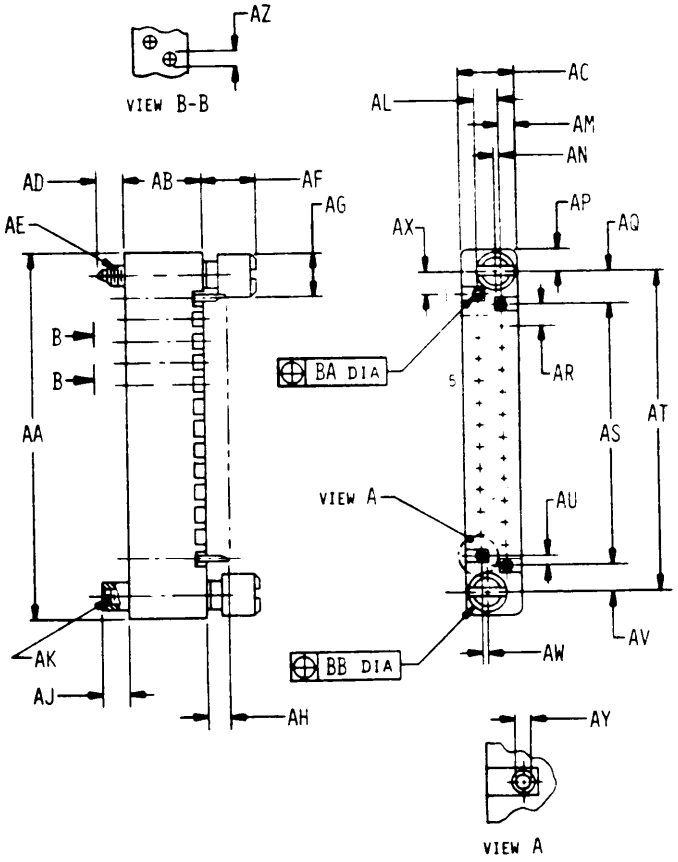


073-01-30

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

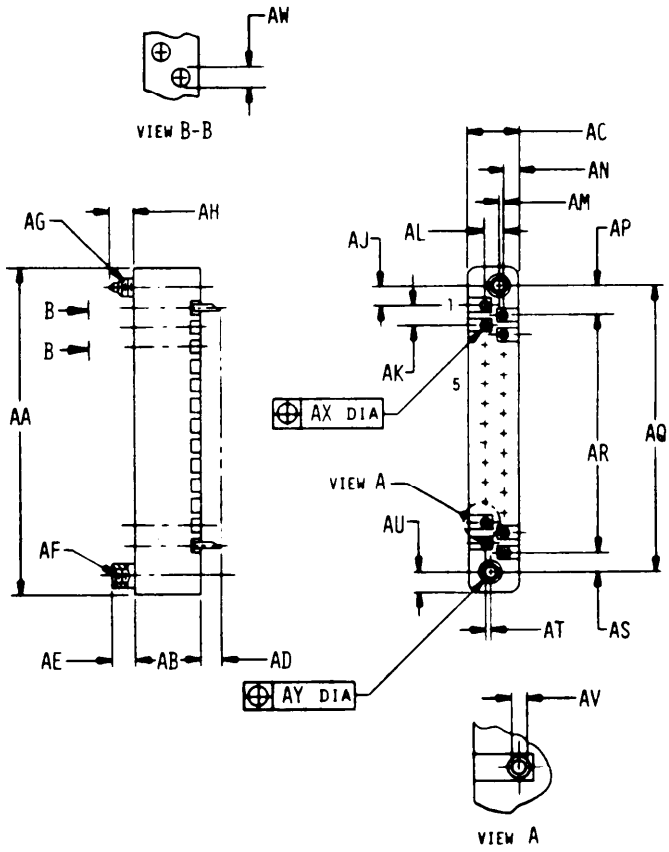


073-01-31


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

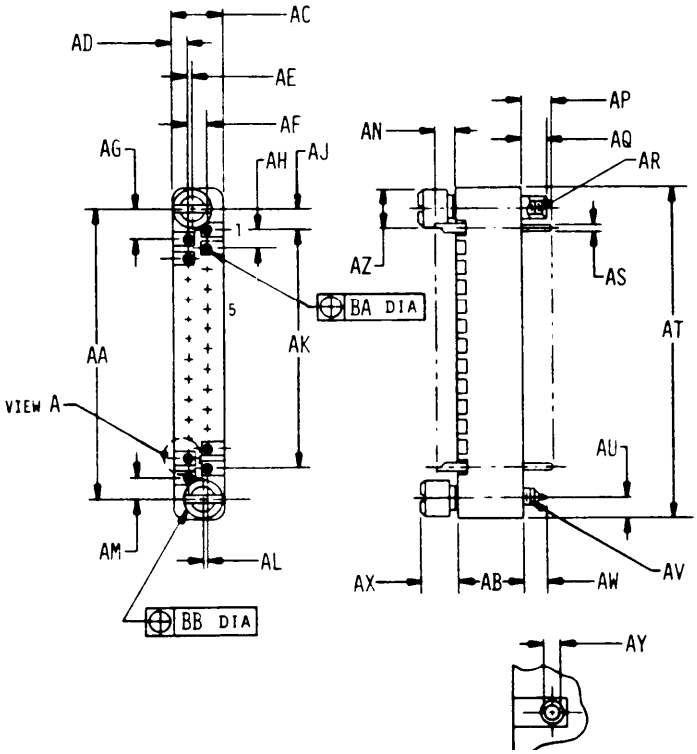


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

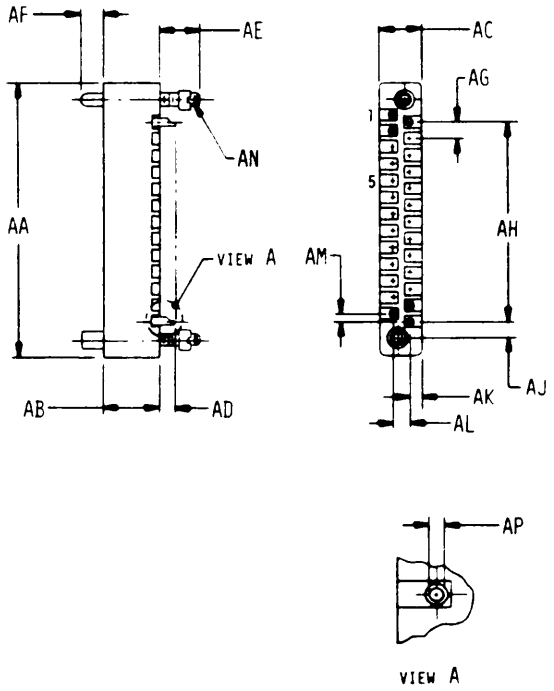


073-01-35

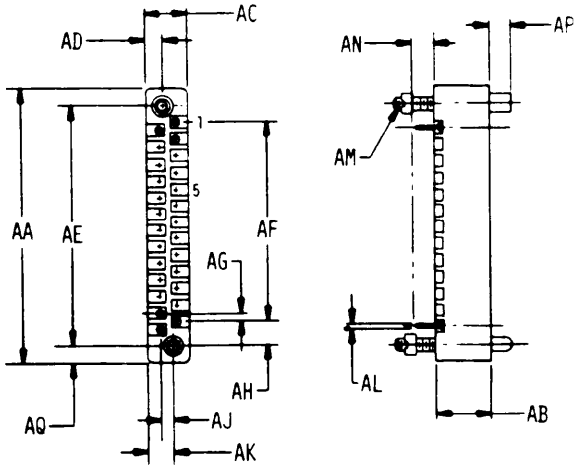

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

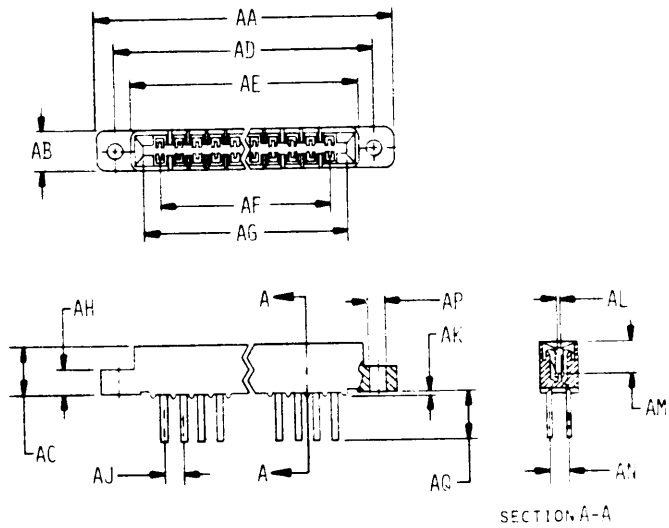


073-01-36

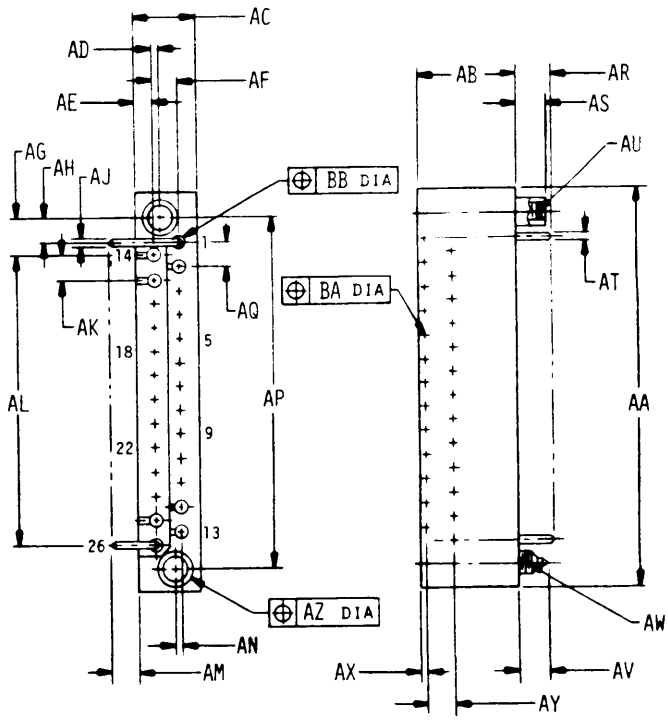


073-01-37

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

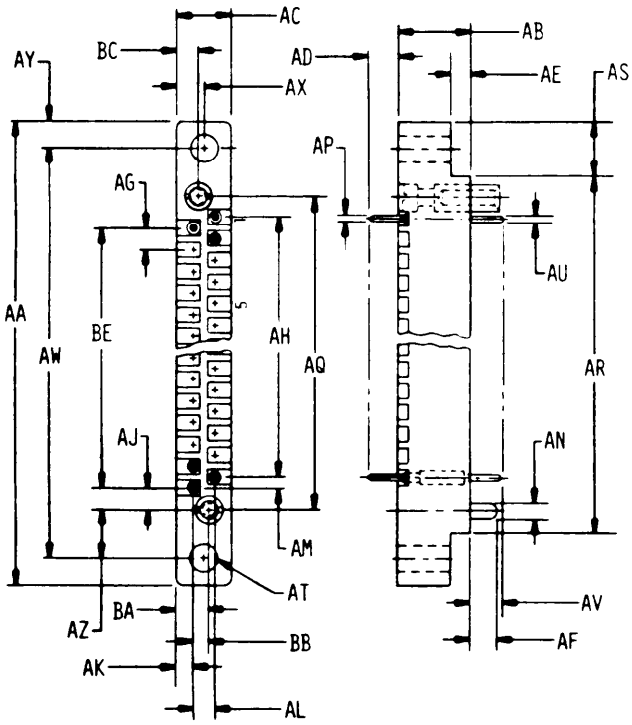


073-01-38

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

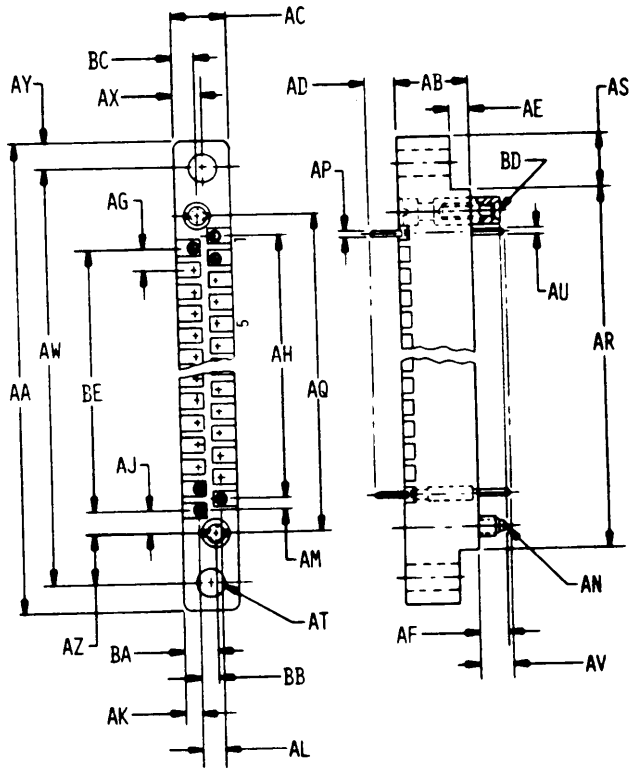


073-01-39

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

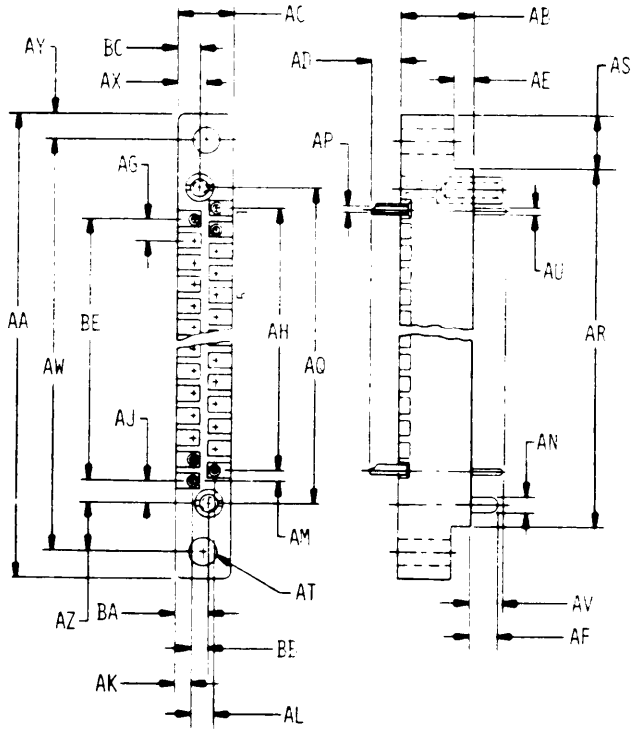


073-01-40

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

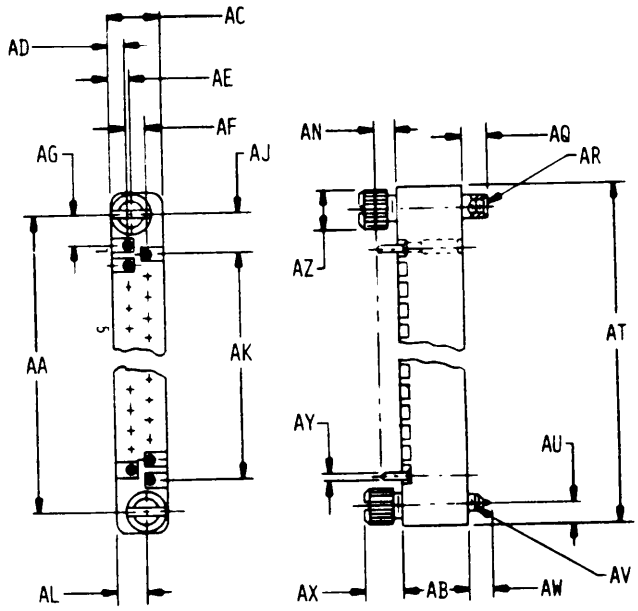


073-01-41

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

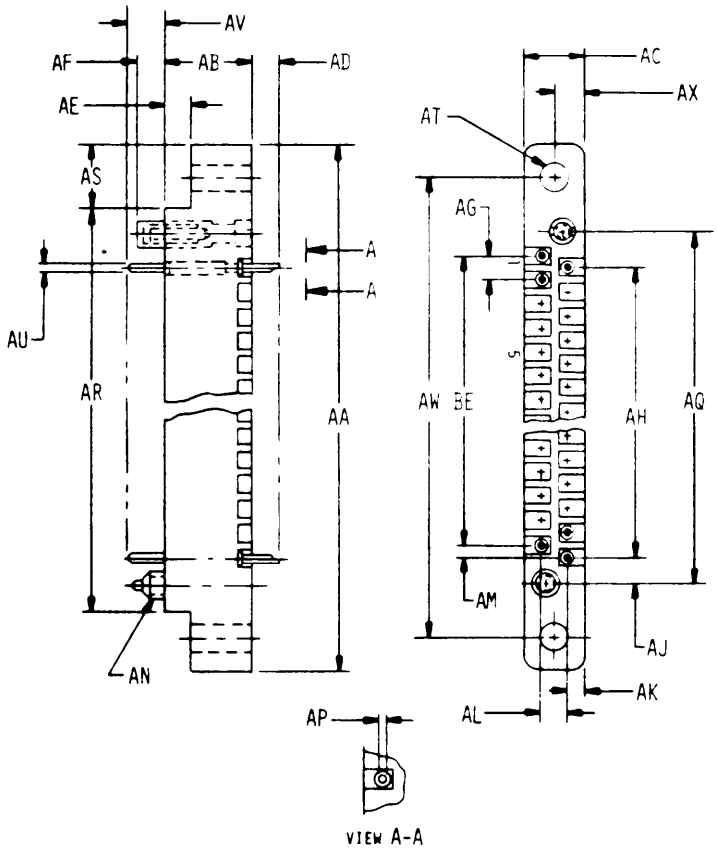



073-01-42

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

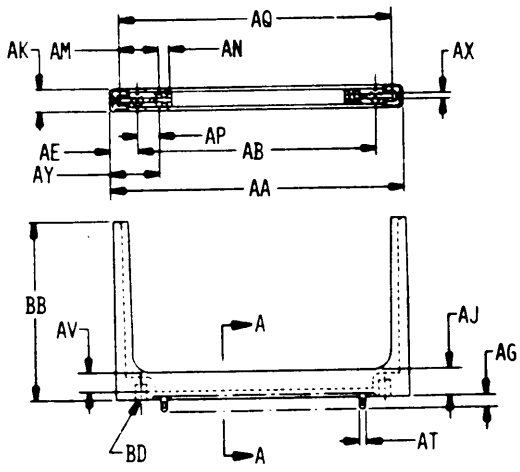


073-01-43



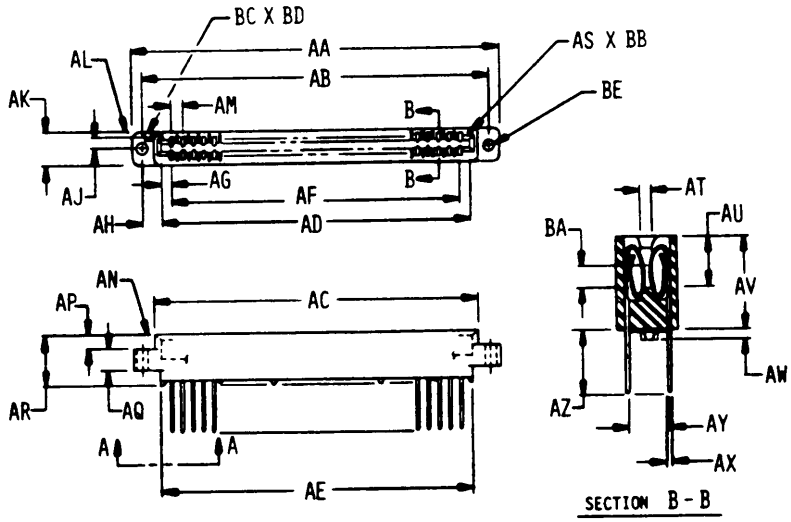


073-01-44

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

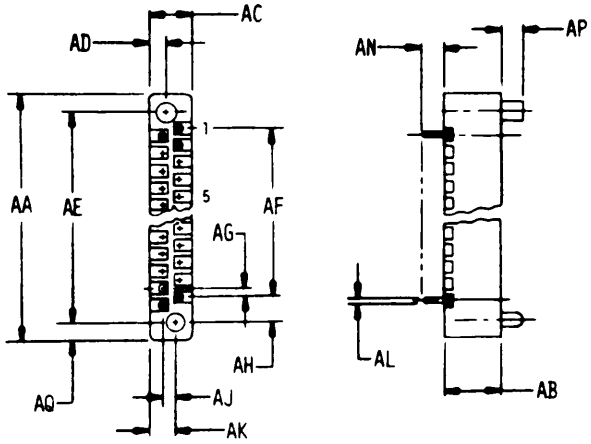


073-01-45

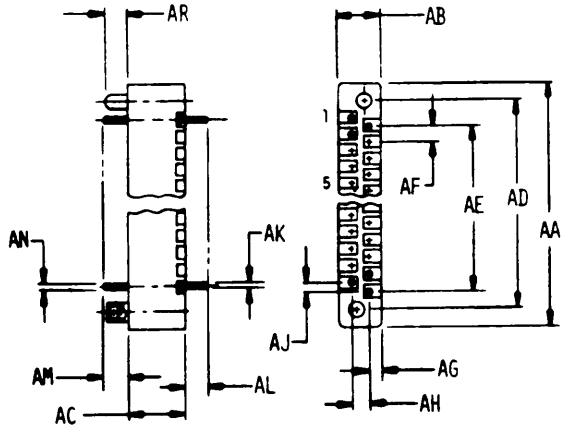



073-01-46

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

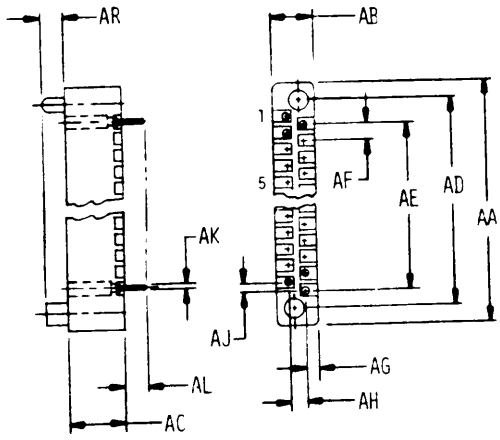


073-01-47

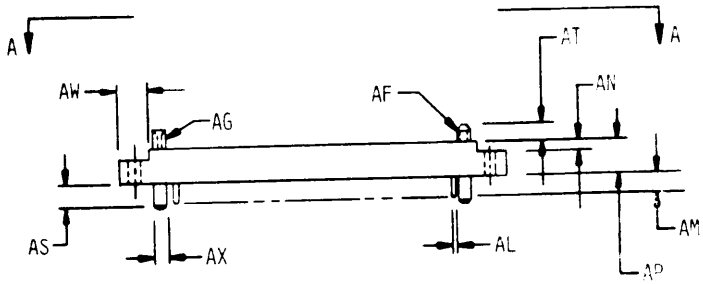

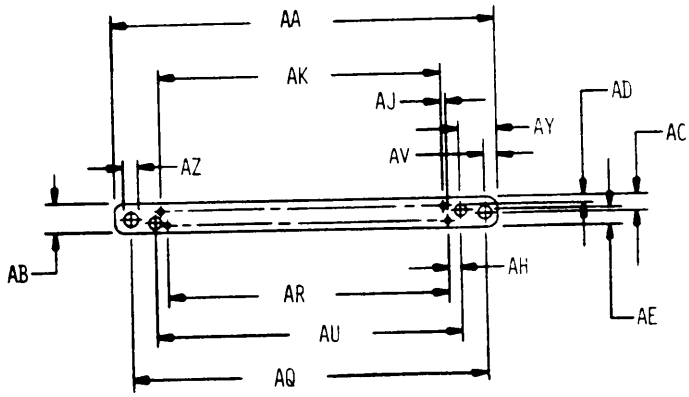


VIEW A-A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

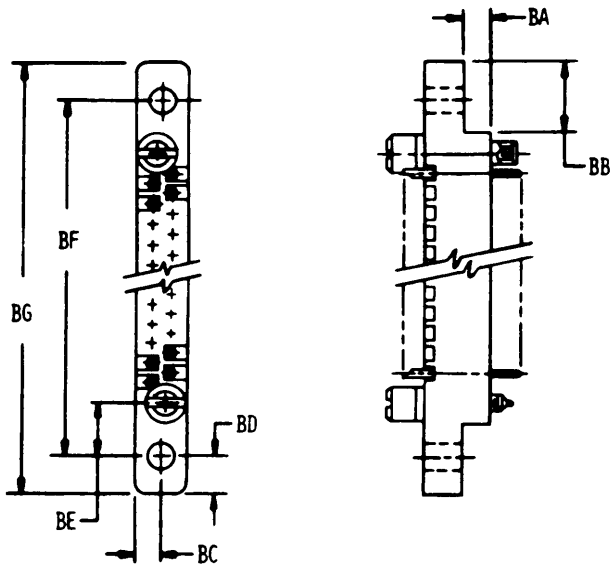


073-01-49

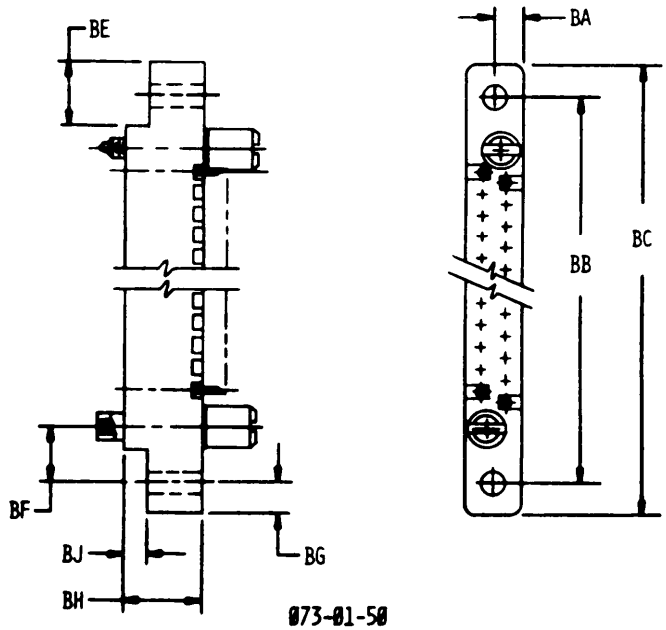


073-01-50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

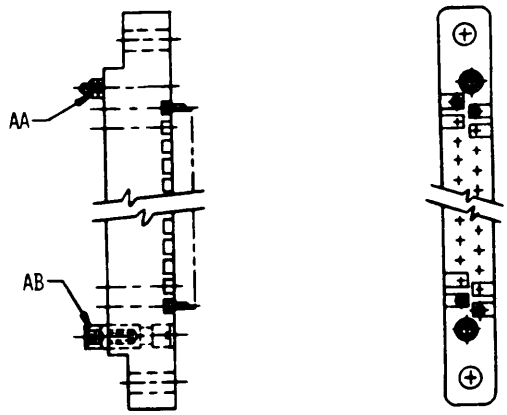


073-01-51

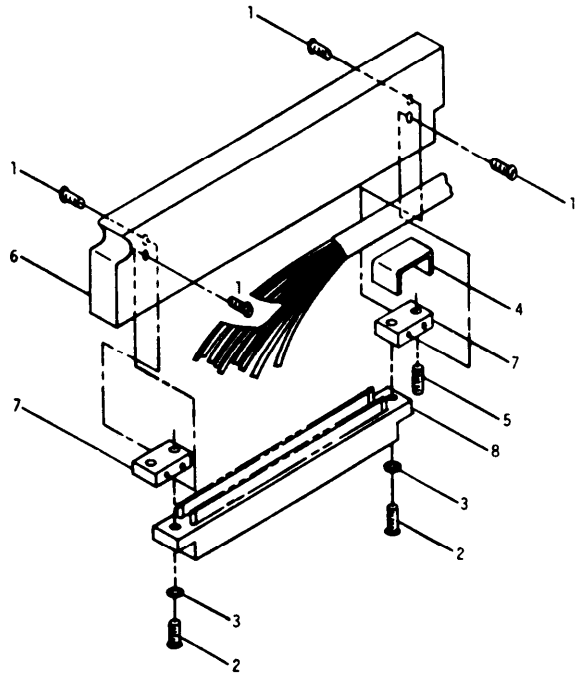


073-01-52

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

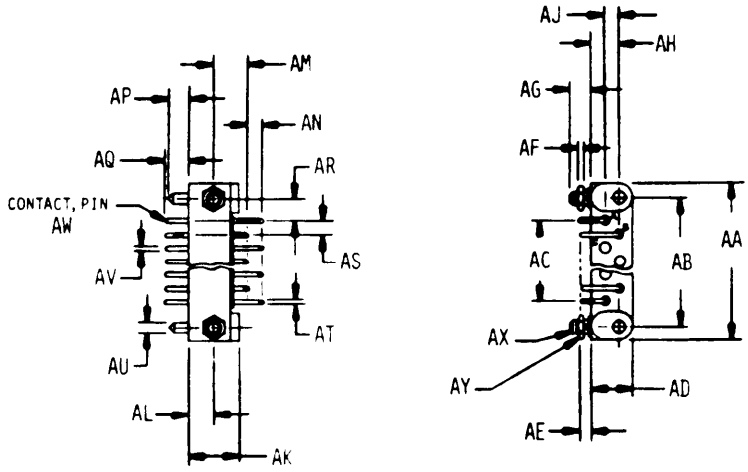


073-01-53

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

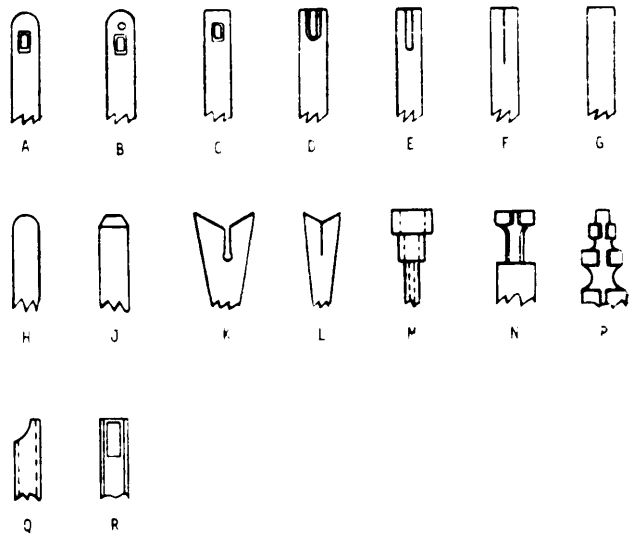


073-02-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

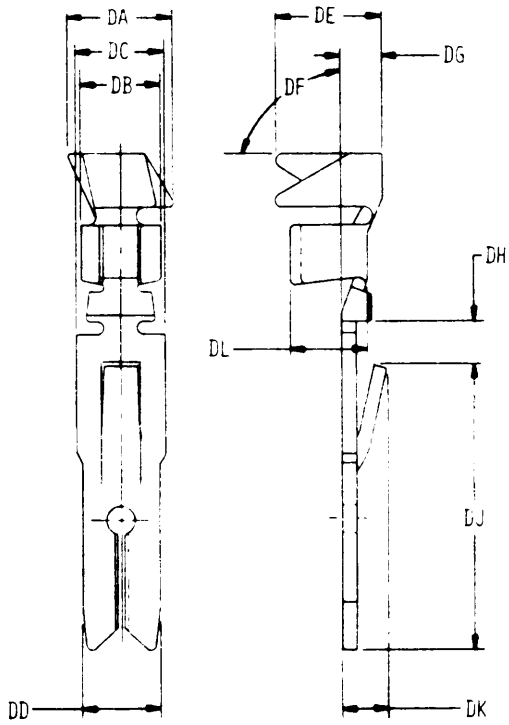


073-02-2

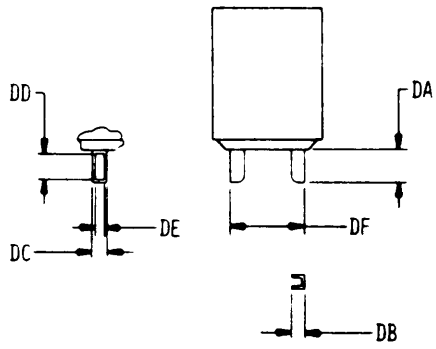


073-02-3


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.



073-03-1



073-03-2

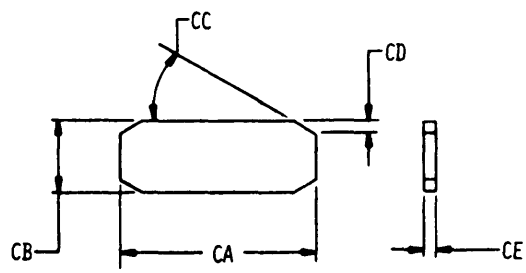

073-04-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INQEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	12	1505	108	1715	42	1922	16
0102	12	1508	100	1732	90	1924	16
0103	12	1509	100	1738	90	1926	10
0104	12	1520	80	1740	90	1928	18
0105	12	1529	112	1744	60	1930	16
8107	14	1545	108	1745	60	1932	18
0108	14	1546	108	1748	60	1934	18
0700	12	1562	16	1756	60	1936	16
0800	12	1564	24	1758	60	1938	18
1003	12	15E6	26	1762	40	1940	18
1004	12	1574	26	1764	40	1942	18
1005	12	1576	28	1768	38	1944	18
1006	12	1560	34	1770	40	1946	16
1008	12	1562	34	1774	38	1948	20
1009	22	1584	34	1778	39	1950	28
1371	80	1586	34	1782	38	1952	20
1372	so	1590	34	1784	38	1954	20
1373	80	1612	28	1790	92	2004	82
1374	108	1604	28	1794	92	2006	82
1376	80	1606	26	1798	92	2008	82
1377	80	1624	86	1800	50	2012	82
1380	78	1636	84	1812	40	2014	82
1381	80	1630	86	1820	40	2062	94
1383	80	1640	84	1822	40	2066	94
1384	78	1644	70	1862	52	2067	94
1386	78	1646	70	1866	52	2070	92
1387	78	1648	70	1878	50	2082	58
1407	80	1652	68	1879	50	2084	54
1451	98	1654	70	1886	56	2086	54
1468	98	1656	70	1890	5s	2087	56
1471	100	1662	84	1902	56	2090	56
1477	74	1669	82	1904	56	2094	52
1470	98	1070	82	1906	16	2096	52
1482	98	1676	88	1908	16	2100	50
1486	98	1682	86	1910	16	2102	24
1488	98	1668	88	1912	16	2104	24
1494	98	1690	88	1914	16	2106	24
1495	98	1706	44	1916	16	2106	26
1502	100	1712	42	1918	16	2110	26
1504	100	1714	42	1920	16	2112	26

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2114	26	2710	36	2390	46	2472	58
2116	26	2312	36	2392	46	2474	58
2118	26	2314	36	2394	46	2476	56
2120	26	2316	36	2396	48	2478	62
2122	26	2318	36	2398	48	2480	64
2124	26	2320	36	2400	48	2482	64
2126	26	2322	38	2402	48	2484	64
2128	28	2324	38	2404	40	2486	64
2130	28	2326	38	2406	48	2488	64
2132	20	2328	40	2408	48	2490	64
2134	28	2330	40	2410	48	2492	64
2136	28	2332		2412	48	2494	64
2138	28	2334	42	2414	48	2496	64
2140	28	2336	42	2416	48	2498	66
2142	28	2338	42	2418	50	2500	68
2144	28	2340	42	2420	50	2502	66
2146	28	2342	42	2422	50	2504	66
2150	34	2344	42	2424	50	2506	68
2152	34	2346	42	2426	50	2508	79
215b	34	2348	42	2424	50	2510	70
2156	34	2350	44	2430	52	2512	70
2158	34	2352	44	2432	52	2514	70
2160	34	2354	44	2434	52	2516	70
2162	34	2356	44	2436	52	2518	72
2164	34	2358	44	2438	52	2520	76
2166	34	2360	44	2440	54	2522	76
2168	34	2362	44	2442	54	2524	76
2170	34	2364	44	2444	54	2526	76
2172	34	2366	44	2446	54	2528	76
2174	34	2368	44	2448	54	2530	76
2176	34	2370	44	2450	54	2532	76
2178	34	2372	44	2452	54	2534	76
2286	58	2374	46	2454	56	2536	76
2292	58	2376	46	2456	56	2536	76
2294	58	2378	46	2456	56	2540	76
2300	36	2280	46	2460	56	2542	78
2302	36	2382	46	2462	56	2544	78
2304	36	2384	46	2466	56	2546	78
2306	36	2386	46	2468	56	2548	76
2308	36	2386	46	2470	56	2550	80

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2552	80	2632	92	2712	106	4686	102
2554	80	2634	92	2714	108	4704	106
2556	80	2636	94	2716	108	4715	106
2558	62	2630	94	2718	108	4717	68
2569	92	2640	94	2720	106	4754	72
2562	82	2642	94	2722	108	4755	72
2564	84	2644	94	2726	106	4756	72
2566	84	2646	94	2726	108	4760	72
2568	84	2648	94	2728	110	4761	72
2570	84	2650	94	2730	11O	4762	72
2572	64	2652	96	2732	110	4765	96
2574	84	2654	96	2734	110	4766	96
2576	84	2656	56	2736	110	4770	96
2578	84	2658	98	2738	110	4772	96
2580	86	2660	98	2740	110	4773	96
2562	86	2662	98	2742	110	4708	74
2584	66	2664	100	2744	110	4790	76
2586	86	2666	100	2746	110	4793	76
2588	86	2668	100	2748	110	4795	74
2590	86	2670	100	2750	110	4798	74
2592	86	2672	100	2752	110	4799	74
2594	86	2674	100	2774	112	4803	74
2596	86	2676	102	2780	112	4805	74
2598	B8	2678	102	2782	112	4813	74
2600	98	2680	102	2784	112	4815	74
2602	88	2682	104	2786	112	4849	62
2604	88	2684	104	4662	102	4850	66
2606	88	2686	104	4663	104	4854	66
2608	68	2688	104	4664	104	4855	66
2610	90	2690	104	4665	104	4856	66
2612	30	2692	106	4666	102	4859	62
2614	90	2694	106	4667	104	4861	66
2616	90	2696	106	4672	102	4867	66
2618	90	2698	106	4674	102	4869	63
2620	90	2700	106	4675	102	4870	68
2622	30	2702	106	4631	108	4874	64
2624	92	2706	106	4682	108	4875	66
2626	92	2706	106	4683	102	4878	96
2628	92	2708	106	4684	102	4884	62
2630	32	2710	106	4665	102	4885	62

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE CODE	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4891	62	6801	30				
4894	60	6803	32				
4897	68	6870	114				
4900	62	6873	12				
4902	62	6874	14				
4906	60	6941	14				
4909	60	6942	14				
4942	112	6991	116				
4543	112	6992	116				
4944	112	6993	116				
4950	22	6994	116				
5000	66	6995	116				
5152	22	7001	114				
5054	22	7002	114				
5660	20	7003	114				
5061	20	7004	114				
5062	20	7005	114				
5063	20	7021	32				
5068	22	7022	32				
5063	20	7023	32				
5070	22	7024	32				
5071	20	7301	22				
5209	112	7302	20				
6205	104	7572	22				
6267	68	7577	22				
6280	62	7500	24				
6308	62	7629	114				
6319	62	7630	114				
6359	78						
6369	12						
6372	114						
6790	30						
6791	30						
6792	30						
6793	30						
6794	30						
6795	30						
6796	30						
6798	30						
6799	30						

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Accessories	28
Additional Part Marking	116
Additional Requirements	114
Altitude	30
Altitude Rating	20
Aperture Cards Required	14
Applicable Documents	116
Base Document	12
Board Engagement Force	36
Board Insertion Force (Overstress)	38
Board Thickness	18
Bond Strength, Body Assembly	38
City, State, Zip	12
Classification	16
Commoning Clips	26
Company Name/Command	12
Configuration	22
Contact Axial Concentricity	40
Contact Current Rating	16
Contact Engagement and Separation Force	42
Contact Identification	26
Contact Insertion and Removal Force	46
Contact Resistance	50
Contact Retention	52
Contact Termination	26
Contact Type	26
Contacts	24
Contract Number/Office Symbol	12
Control, Source	12
Control, Specification	14
Crimp Resistance	56
Crimp Tensile Strength	58
Current Cycling	60
Date	12
Design and Construction	24
Dielectric Withstanding Voltage at Reduced Barometric Pressure	60
Dielectric Withstanding Voltage at Sea Level	64
Durability	68
Finishes	24
Format	12
Fungus	72

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

Page

Government Design Activity FSCM - 12

Humidity- - - - - ------- 74

Illustrations - - --- --- 22
Insulation Resistance - 78

Low-Signal Level Contact Resistance - - - - - - - - - - - - - - - - - - - 82

Magnetic Permeability - 82
Maintenance Aging - 84
Materials- 24
Mating and Unmating Forces- 86
Mating Connector- 28
24
Mounting Hardware - 114

Nomenclature- 116
Notes --------- 116

Oversize Pin Exclusion- 90

Packaging - 116
Part Marking- 114
Part Number - 14
Part Number Cross-Reference - - - - - - - - - - - - - - - - - - - 116
Phone Number - 12
Pin Contact Insertion Force - 92
Polarization- 34
Probe Damage (Contacts) - 92

Quality Assurance Provisions- 116

Rated Working Voltage - 16
Readout ---------- 20
Requester FSCM- 12
Requester's Name- 12
Revision of AEDPS Document (Number) - - - - - - - - - - - - - - - - 14

Salt Spray- 96
Scope - - - - - - - ---- 14
Seal and Sealing - 28
Shock, High Impact- 98
Shock, Specified Pulse - 100
Solderability - 102

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Source Table	14
Storage Conditions	112
Street/Building	12
Superseded Document	116
System Application	12
Tabulated Characteristics	24
Temperature	30
Temperature Cycling	104
Temperature Rating	20
Tools	28
Units of Measure	14, 22
Vibration	108
Weight	32
Workmanship	114

*U.S GOVERNMENT PRINTING OFFICE:1980-603-121/568

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET____OF____

*TITLE CODE 1 2 3 4 5 6	*REQUESTER NO. 7 8 9 10 11 12	CHAR CODE 13 14 15 16
*REQUESTER'S NAME		Ø 1 Ø 1
*COMPANY NAME/COMMAND		Ø 1 Ø 2
*STREET/BUILDING		Ø 1 Ø 3
*CITY, STATE, ZIP		Ø 1 Ø 4
*PHONE NO. INCLUDE A/C AUTOVON IF APPLICABLE		Ø 1 Ø 5
*DATE		1 Ø Ø 3
*REQUESTER FSCM		1 Ø Ø 4
*CONTRACT NO./OFFICE SYMBOL		1 Ø Ø 5
*BASE DOCUMENT		1 Ø Ø 6
*SYSTEM APPLICATION		1 Ø Ø 8
*GOVERNMENT DESIGN ACTIVITY FSCM		6 3 6 9
*FORMAT SIX SECTION DOCUMENT.		Ø 7 Ø Ø
ONE SECTION DOCUMENT.		Ø 8 Ø Ø
SEARCH ONLY.		Ø 1 Ø 6
APERTURE CARDS REQUIRED.		Ø 1 Ø 7
REVISION OF AEDPS DOCUMENT NO.		Ø 1 Ø 8
*CONTROL SOURCE.		6 8 7 3
SPECIFICATION.		6 8 7 4
*SOURCE TABLE		9 1 5 1
UNIT OF MEASURE U.S.		6 9 4 1
S:.		6 9 4 2

CHARACTERISTIC VALUE

20 25 30 35 40 45 50 55 60 65 70 75

LINE NO. 79 80

PLEASE SUPPLY THE FOLLOWING:

DASH-NUMBERED PART _____ REV _____ NOTICE # _____

AS A FINAL CHECK, SCAN THE SRS FOR THE FOLLOWING COMMON ERRORS:

- ☐ MANDATORY CHARACTERISTIC CODES AND VALUES NOT SUPPLIED
- ☐ ZERO (Ø) WRITTEN WITHOUT VIRGULE (Ø)
- ☐ USE OF POUND SIGN (#) WITHOUT ACCOMPANYING CHARACTERISTIC VALUE
- ☐ POUND SIGN (#) OMITTED FROM END OF STATEMENT (CHARACTERISTIC VALUE)
- ☐ CHARACTERISTIC CODE USED MORE THAN ONCE (OTHER THAN MULTILINE STATEMENT)
- ☐ MULTILINE STATEMENT NOT NUMBERED IN COLUMN 80

*MANDATORY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET ___ OF ___

TITLE CODE 1 2 3 4 5 6	REQUESTER NO. 7 8 9 10 11 12	CHAR CODE 13 14 15 16	CHARACTERISTIC VALUE 20 25 30 35 40 45 50 55 60 65 70 75 79	LINE NO. 80

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
DOD STD 35-66A

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND PEES PAID
DEPARTMENT OF THE ARMY
DOD-314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander,
U.S. Army Missile R & D Command,
ATTN: DRDMI-ESD,
Redstone Arsenal, Alabama 35809

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.