DOD-STD-35-67A(MI)

15 June 1978
SUPERSEDING
MIL-STD-35-67
7 JANUARY 1974

MILITARY STANDARD

CORD, ELECTRICAL

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

FSC EDS

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Cord, Electrical
Automated Engineering
Document Preparation System

DOD-STD-35-67A(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-67A(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for electrical cord.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	3
	2.1	Issues of documents	3
	2.2	Other publications	4
	3.	DEFINITIONS	5
	4.	GENERAL REQUIREMENTS	7
	4.1	Introduction	7
	4.2	Specification Requirement Sheet (SRS)	7
	4.3	Configuration	7
	4.3.1	Dimensions	7
	4.3.2	Illustrations	7
	4.4	Units of measure	7
	5.	DETAILED REQUIREMENTS	9
	5.1	Introduction	9
	5.2	MSE Formats	9
	5.3	Referenced documents	9
	5.4	Tabulation	9
	5.5	Keyword Code Index (KCI) and Standard Paragraphs	11
	5.5.1	Interrelationship of Codes	11
	5.5.2	Automatic MSE Data	11
	5.5.3	DOD-STD-35 Tables	11

TABLES

Table	I.	Title Index	2
	II.	Tabulation candidates	10

APPENDICES

Appendix	A.	Illustrations	85
	B.	Characteristic Code Index	111
		Index	117

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for electrical cord.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see Table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
CORD, ELECTRICAL	034001	MIL-C-915	CABLE AND CORD, SHIPBOARD
		MIL-C-3849	TINSEL
		MIL-C-3883	SHIELDED AUDIO
		MIL-C-3884	SHORT LAY
		MIL-C-5898	HEADSET AND MICROPHONE EXTENSIONS
		MIL-C-6166	HEADSET AND MICROPHONE
		MIL-C-10392	AUDIO, MINIATURE
		MIL-C-13273	RETRACTILE
		MIL-C-55668	AUDIO, SUBMINIATURE
		J-C-580	CORD, FLEXIBLE

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-C-915	Cable and Cord Electrical, for Shipboard Use General Specification for
MIL-C-3849	Cord, Electrical (Tinsel)
MIL-C-3883	Cord, Electrical, Shielded (Audio Frequency)
MIL-C-55668	Cord, Electrical; Audio, Subminiature (Retractile and Straight)

STANDARDS

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-104	Limit for Electrical Insulation Color
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-202	Electronic Component Parts Test Methods
MIL-STD-681	Identification Coding and Application of Hookup and Lead Wire
MIL-STD-810	Environmental Test Methods

FEDERAL

FED-STD-228	Cable and Wire, Insulated; Methods of Testing

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTMB33	Tinned Soft or Annealed Copper Wire for Electrical Purposes, Specification for
ASTME380	Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, Pa. 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to electrical cord.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for electrical cord, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to electrical cord.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to electrical cord.

4.3.2 Illustrations. Illustrations applicable to electrical cord are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table II provides codes for column headings which may be used for electrical cord characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE II. TABULATION CANDIDATES

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1686	SOLID CONDUCTORS (NO.)	1690	STRANDED CONDUCTORS (NO.)	1688	CONDUCTOR SIZE (AWG)
1689	CONDUCTOR CROSS SECT (CIR MILS)	1692	CONDUCTOR CROSS SECT (SQ MM)	1699	CONDUCTOR DIAMETER (INCH)
1700	CONDUCTOR DIAMETER (MM)	1693	STRAND SIZE (AWG)	1736	MAX DIA INSUL COND (IN.)
1738	MAX DIA INSUL COND (MM)	1806	MIN JACKET DIA (IN.)	1808	MAX JACKET DIA (IN.)
1810	MIN JACKET DIA (MM)	1812	MAX JACKET DIA (MM)	1832	INSUL COLOR
1836	INSUL COLOR (NO.)	1840	BRAID COLOR	1844	BRAID COLOR (NO.)
1846	JACKET COLOR	1850	JACKET COLOR (NO.)	1948	MAX COND RES (OHMS/ 1000 FT)
1949	MAX COND RES (OHMS/KM)				

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currenversion before use.

5.5 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.5.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.5.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.5.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT.	0700
ONE SECTION DOCUMENT.	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OF OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35	
APERTURE CARDS REQUIRED	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6874	THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).
0107	
0108	0108. SCOPE. SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.
	PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.
	PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.
6941	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES.
6942	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE RATING	
MAXIMUM OPERATING (DEGREES CELSIUS)	5069
MINIMUM OPERATING (DEGREES CELSIUS)	5068
ELECTRICAL RATINGS	
MAXIMUM VOLTAGE (VOLTS)	1562
FREQUENCY	
MAXIMUM (HERTZ)	1570
NOMINAL (HERTZ)	1566
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
DIMENSION TABLE, (SEE TABLE III, DOD-STD-35)	
*UNITS (SELECT ONE)	
(INCHES)	7572
(FEET)	7573
(YARDS)	7574

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	TEMPERATURE RATING.
5069	THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.
	ELECTRICAL RATINGS.
1562	THE VOLTAGE SHALL BE NOT GREATER THAN 1562 VOLTS.
1570	THE FREQUENCY SHALL BE NOT GREATER THAN 1570 HERTZ.
1566	THE FREQUENCY SHALL BE 1566 HERTZ.
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7573	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN FEET OR DEGREES.
7574	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN YARDS OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONFIGURATION (CONT)	
UNITS (CONT)	
SI (SELECT ONE)	
(CENTIMETERS)	7576
(MILLIMETERS)	7577
(METERS)	7578
ILLUSTRATIONS	
(NUMBER)	4950

NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.

TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)

MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)

NOTE: AUTOMATIC WHEN TABLE VII IS USED.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7576	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN CENTIMETERS OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
7578	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN METERS OR DEGREES.
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.

MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE IX IS USED.	
DESIGN AND CONSTRUCTION	
CONDUCTORS	
SOLID (NUMBER)	1686
STRANDED (NUMBER)	1690
CONDUCTOR SIZE (AWG NUMBER)	1688
CONDUCTOR CROSS-SECTIONAL AREA (SELECT ONE)	
(CIRCULAR MILS)	1689
(SQUARE MILLIMETERS)	1692
CONDUCTOR DIAMETER (SELECT ONE)	
(INCHES)	1699
(MILLIMETERS)	1700
STRANDS PER CONDUCTOR (NUMBER)	1691
STRAND DIAMETER (SELECT ONE)	
(INCHES)	1697
(MILLIMETERS)	1698
STRAND SIZE (AWG NUMBER)	1693

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE | STANDARD PARAGRAPH

FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

DESIGN AND CONSTRUCTION.

1686 THE CORD SHALL CONTAIN 1686 SOLID CONDUCTOR(S).

1690 THE CORD SHALL CONTAIN 1690 STRANDED CONDUCTOR(S).

1688 THE CONDUCTOR SIZE SHALL BE 1688 AWG.

1689 THE CONDUCTOR CROSS-SECTIONAL AREA SHALL BE 1689 CIRCULAR MIL(S).

1692 THE CONDUCTOR CROSS-SECTIONAL AREA SHALL BE 1692 SQUARE MILLIMETER(S).

1699 THE CONDUCTOR DIAMETER SHALL BE 1699 INCH(S).

1700 THE CONDUCTOR DIAMETER SHALL BE 1700 MILLIMETER(S).

1691 THE NUMBER OF STRANDS PER CONDUCTOR SHALL BE 1691.

1697 THE STRAND DIAMETER SHALL BE 1697 INCH(S).

1698 THE STRAND DIAMETER SHALL BE 1698 MILLIMETER(S).

1693 THE STRAND SIZE SHALL BE 1693 AWG.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
CONDUCTORS (CONT)	
STRAND CROSS-SECTIONAL AREA (SELECT ONE)	
(CIRCULAR MILS)	1694
(SQUARE MILLIMETERS)	1696
STRANDING METHOD (SELECT ONE)	
BUNCHED LAY.	1714
CONCENTRIC LAY.	1712
ROPE LAY.	1715
LAY LENGTH (SELECT ONE)	
(INCHES)	1718
(MILLIMETERS)	1717
STRANDING SPECIFICATION (DOC DES)	1716
INNER SEPARATOR CONDUCTOR COVERAGE (PERCENT)	1724
MINIMUM INSULATION THICKNESS (SELECT ONE)	
(INCHES)	1730
(MILLIMETERS)	1732

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1694	THE STRAND CROSS-SECTIONAL AREA SHALL BE 1694 CIRCULAR MIL(S).
1696	THE STRAND CROSS-SECTIONAL AREA SHALL BE 1696 SQUARE MILLIMETER(S).
1714	THE STRANDING METHOD SHALL BE BUNCHED LAY.
1712	THE STRANDING METHOD SHALL BE CONCENTRIC LAY.
1715	THE STRANDING METHOD SHALL BE ROPE LAY.
1718	THE LAY LENGTH SHALL BE 1718 INCH(S).
1717	THE LAY LENGTH SHALL BE 1717 MILLIMETER(S).
1716	THE STRANDING SPECIFICATION SHALL BE 1716.
1724	THE INNER SEPARATOR CONDUCTOR SHALL BE 1724 PERCENT.
1730	THE INSULATION THICKNESS SHALL BE NOT LESS THAN 1730 INCH(S).
1732	THE INSULATION THICKNESS SHALL BE NOT LESS THAN 1732 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
MAXIMUM DIAMETER OF INSULATED CONDUCTOR (SELECT ONE)	
(INCHES)	1736
(MILLIMETERS)	1738
STAYCORD CONCENTRIC BRAIDS (NUMBER)	1740
STAYCORD DIAMETER (SELECT ONE)	
(INCHES)	1742
(MILLIMETERS)	1744
CABLING METHOD (DESIGNATION)	1746
CABLING LAY LENGTH (SELECT ONE)	
(INCHES)	1748
(MILLIMETERS)	1750
(NUMBER OF TIMES PITCH DIAMETER)	1752
CABLING LAY DIRECTION (SELECT ONE)	
RIGHT HAND.	1756
LEFT HAND.	1758
CABLING SPECIFICATION (DOC DES)	1760

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1736	THE DIAMETER OF THE INSULATED CONDUCTOR SHALL BE NOT GREATER THAN 1736 INCH(S).
1738	THE DIAMETER OF THE INSULATED CONDUCTOR SHALL BE NOT GREATER THAN 1738 MILLIMETER(S).
1740	THE NUMBER OF STAYCORD CONCENTRIC BRAIDS SHALL BE 1740.
1742	THE DIAMETER OF THE STAYCORD(S) SHALL BE 1742 INCH(S).
1744	THE DIAMETER OF THE STAYCORD(S) SHALL BE 1744 MILLIMETER(S).
1746	THE CABLING METHOD SHALL BE 1746.
1748	THE CABLING LAY LENGTH SHALL BE 1748 INCH(S).
1750	THE CABLING LAY LENGTH SHALL BE 1750 MILLIMETER(S).
1752	THE CABLING LAY LENGTH SHALL BE 1752 TIMES THE PITCH DIAMETER.
1756	THE CABLING LAY DIRECTION SHALL BE RIGHT HAND.
1758	THE CABLING LAY DIRECTION SHALL BE LEFT HAND.
1760	THE CABLING SPECIFICATION SHALL BE 1760.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
FILLER CROSS SECTION (SELECT ONE)	
(CIRCULAR MILS)	1762
(SQUARE MILLIMETERS)	1764
FILLER TO FORM CIRCULAR CROSS SECTION.	1766
MINIMUM SHIELD COVERAGE (PERCENT)	1768
SHIELD STRAND SIZE (AWG NUMBER)	1770
SHIELD LAY LENGTH (SELECT ONE)	
(INCHES)	1772
(MILLIMETERS)	1774
SHIELD LAY DIRECTION (SELECT ONE)	
RIGHT HAND.	1776
LEFT HAND.	1777
SHIELD THICKNESS (SELECT ONE)	
(INCHES)	1778
(MILLIMETERS)	1779

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currenversion before use.

CHAR CODE	STANDARD PARAGRAPH
1762	THE FILLER SHALL FORM A CIRCULAR CROSS-SECTION OF 1762 CIRCULAR MIL(S).
1764	THE FILLER SHALL FORM A CIRCULAR CROSS-SECTION OF 1764 SQUARE MILLIMETER(S).
1766	THE FILLER SHALL FORM A CIRCULAR CROSS-SECTION.
1768	THE SHIELD SHALL PROVIDE NOT LESS THAN 1768 PERCENT COVERAGE.
1770	THE SHIELD STRAND SIZE SHALL BE 1770 AWG.
1772	THE SHIELD LAY LENGTH SHALL BE 1772 INCH(S).
1774	THE SHIELD LAY LENGTH SHALL BE 1774 MILLIMETER(S).
1776	THE SHIELD LAY DIRECTION SHALL BE RIGHT HAND.
1777	THE SHIELD LAY DIRECTION SHALL BE LEFT HAND.
1778	THE SHIELD THICKNESS SHALL BE 1778 INCH(S).
1779	THE SHIELD THICKNESS SHALL BE 1779 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
TIE CORD DIAMETER (SELECT ONE)	
(INCHES)	1780
(MILLIMETERS)	1782
BRAID DIAMETER (SELECT ONE)	
(INCHES)	1784
(MILLIMETERS)	1786
BRAID THICKNESS (SELECT ONE)	
(INCHES)	1788
(MILLIMETERS)	1790
BRAID PLIES (NUMBER)	1792
BRAID CARRIERS (NUMBER)	1794
BRAID CARRIER SIZE (AWG NUMBER)	1796
BRAID ENDS PER CARRIER (NUMBER)	1798
HEIGHT OF BRAID SPIRAL (SELECT ONE)	
(INCHES)	1800
(MILLIMETERS)	1802
REINFORCEMENT SIZE (NUMBER)	1804

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1780	THE TIE CORD DIAMETER SHALL BE 1780 INCH(S).
1782	THE TIE CORD DIAMETER SHALL BE 1782 MILLIMETER(S).
1784	THE BRAID DIAMETER SHALL BE 1784 INCH(S).
1786	THE BRAID DIAMETER SHALL BE 1786 MILLIMETER(S).
1788	THE BRAID THICKNESS SHALL BE 1788 INCH(S).
1790	THE BRAID THICKNESS SHALL BE 1790 MILLIMETER(S).
1792	THE BRAID SHALL CONSIST OF 1792 PLIES.
1794	THE BRAID SHALL CONTAIN 1794 CARRIERS.
1796	THE BRAID CARRIER SIZE SHALL BE 1796 AWG.
1798	THE BRAID SHALL CONTAIN 1798 ENDS PER CARRIER.
1800	THE HEIGHT OF THE BRAID SPIRAL SHALL BE 1800 INCH(S).
1802	THE HEIGHT OF THE BRAID SPIRAL SHALL BE 1802 MILLIMETER(S).
1804	THE REINFORCEMENT SIZE SHALL BE 1804.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
JACKET DIAMETER (SELECT ONE)	
U.S.	
MINIMUM (INCHES)	1806
MAXIMUM (INCHES)	1808
SI	
MINIMUM (MILLIMETERS)	1810
MAXIMUM (MILLIMETERS)	1812
MINIMUM JACKET THICKNESS (SELECT ONE)	
(INCHES)	1814
(MILLIMETERS)	1816
JACKET MINIMUM THICKNESS VS. MAXIMUM THICKNESS (PERCENT)	1818
COLOR	
INSULATION (SELECT ONE)	
PER MIL-STD-104 (NAME)	1832
*CLASS (NUMBER)	1834

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currenversion before use.

CHAR CODE	STANDARD PARAGRAPH
1806	THE JACKET DIAMETER SHALL BE NOT LESS THAN 1806 INCH(S).
1808	THE JACKET DIAMETER SHALL BE NOT GREATER THAN 1808 INCH(S).
1810	THE JACKET DIAMETER SHALL BE NOT LESS THAN 1810 MILLIMETER(S).
1812	THE JACKET DIAMETER SHALL BE NOT GREATER THAN 1812 MILLIMETER(S).
1814	THE JACKET THICKNESS SHALL BE NOT LESS THAN 1814 INCH(S).
1816	THE JACKET THICKNESS SHALL BE NOT LESS THAN 1816 MILLIMETER(S).
1818	THE JACKET SHALL BE WELL-CENTERED OVER THE INSULATED CONDUCTORS AND THE MINIMUM THICKNESS OF THE JACKET, MEASURED AT ANY CROSS SECTION ALONG THE LENGTH OF THE COMPLETED CORD, SHALL BE NOT LESS THAN 1818 PERCENT OF THE MAXIMUM THICKNESS AT THAT CROSS SECTION.
1832	THE INSULATION COLOR SHALL BE 1832 IN ACCORDANCE WITH MIL-STD-104.
1834	THE INSULATION COLOR CLASS SHALL BE 1834.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
INSULATION (CONT)	
PER MIL-STD-681 (IDENTIFICATION NUMBER)	1836
CLASS PER MIL-STD-104 (NUMBER)	1838
BRAID (SELECT ONE)	
PER MIL-STD-104 (NAME)	1840
*CLASS (NUMBER)	1842
PER MIL-STD-681 (IDENTIFICATION NUMBER)	1844
CLASS PER MIL-STD-104 (NUMBER)	1845
JACKET (SELECT ONE)	
PER MIL-STD-104 (NAME)	1846
*CLASS (NUMBER)	1848
PER MIL-STD-681 (IDENTIFICATION NUMBER)	1850
CLASS PER MIL-STD-104 (NUMBER)	1851

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1836	THE INSULATION COLOR SHALL BE NUMBER 1836 IN ACCORDANCE WITH MIL-STD-681.
1838	THE INSULATION COLOR CLASS SHALL BE 1838 IN ACCORDANCE WITH MIL-STD-104.
1840	THE BRAID COLOR SHALL BE 1840 IN ACCORDANCE WITH MIL-STD-104.
1842	THE BRAID COLOR CLASS SHALL BE 1842.
1844	THE BRAID COLOR SHALL BE NUMBER 1844 IN ACCORDANCE WITH MIL-STD-681.
1845	THE BRAID COLOR CLASS SHALL BE 1845 IN ACCORDANCE WITH MIL-STD-104.
1846	THE JACKET COLOR SHALL BE 1846 IN ACCORDANCE WITH MIL-STD-104.
1848	THE JACKET COLOR CLASS SHALL BE 1848.
1850	THE JACKET COLOR SHALL BE NUMBER 1850 IN ACCORDANCE WITH MIL-STD-681.
1851	THE JACKET COLOR CLASS SHALL BE 1851 IN ACCORDANCE WITH MIL-STD-104.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
IDENTIFICATION	
COLOR CODE (DOC DES)	1852
MARKING THREAD.	1854
SURFACE MARKING.	1856
MARKING (SPECIFY)	1860
INTERVAL (SELECT ONE)	
(INCHES)	1862
(MILLIMETERS)	1864
CHARACTER HEIGHT (SELECT ONE)	
(INCHES)	1866
(MILLIMETERS)	1868
SURFACE CONDITION SUITABLE FOR BONDING.	2478

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1852	THE COLOR CODE FOR CORD IDENTIFICATION SHALL BE IN ACCORDANCE WITH 1852.
1854	A MARKER THREAD SHALL BE USED FOR CORD IDENTIFICATION.
1856	SURFACE MARKING SHALL BE USED FOR CORD IDENTIFICATION.
1860	THE IDENTIFICATION MARKING SHALL BE 1860.
1862	THE MARKING SHALL BE AT INTERVALS OF 1862 INCH(S).
1864	THE MARKING SHALL BE AT INTERVALS OF 1864 MILLIMETER(S).
1866	THE MARKING CHARACTER HEIGHT SHALL BE 1866 INCH(S).
1868	THE MARKING CHARACTER HEIGHT SHALL BE 1868 MILLIMETER(S).
2478	SURFACE CONDITION. SURFACE CONDITION OF THE CORD JACKET SHALL BE CLEAN, DRY, AND FREE OF ANY COATING, FILM, OR OTHER TREATMENT WHICH WOULD INTERFERE WITH THE BONDING TO IT OF ENCAPSULATING OR MOLDING MATERIALS NORMALLY USED IN SPLICING OR TERMINATING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
WEIGHT	
MAXIMUM WEIGHT PER UNIT LENGTH (SELECT ONE)	
U.S.	
PER 1000 FEET (POUNDS)	7347
SI	
PER METER (GRAMS)	7400
MINIMUM WEIGHT PER UNIT LENGTH (SELECT ONE)	
U.S.	
PER 1000 FEET (POUNDS)	7059
SI	
PER METER (GRAMS)	7348
BENDING ENDURANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2168
NO BREAKING, CRACKING, OR BREAKDOWN.	2170

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7347	MAXIMUM WEIGHT PER 1000 FEET. THE WEIGHT PER 1000 FEET SHALL BE NOT GREATER THAN 7347 POUND(S).
7400	MAXIMUM WEIGHT PER METER. THE WEIGHT PER METER SHALL BE NOT GREATER THAN 7400 GRAM(S).
7059	MINIMUM WEIGHT PER 1000 FEET. THE WEIGHT PER 1000 FEET SHALL BE NOT LESS THAN 7059 POUND(S).
7348	MINIMUM WEIGHT PER METER. THE WEIGHT PER METER SHALL BE NOT LESS THAN 7348 GRAM(S).
2168	BENDING ENDURANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2168
2170	BENDING ENDURANCE. THE CORD SHALL EXHIBIT NO EVIDENCE OF BREAKING OF CONDUCTOR STRANDS, CRACKING OF JACKET MATERIAL, OR ELECTRICAL BREAKDOWN.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
BENDING ENDURANCE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2150
PER MIL-C-915.	2148
TENSION (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2152
(KILOPASCALS)	2158
SPECIMEN LENGTH (SELECT ONE)	
(INCHES)	2154
(MILLIMETERS)	2160
TEST TEMPERATURE (DEGREES CELSIUS)	2156
BENDING RATE (CYCLES PER MINUTE)	2162
PERFORM VOLTAGE WITHSTAND TEST.	2164
VOLTAGE (SELECT ONE)	
(VOLTS AC)	2172
(VOLTS DC)	2173
BREAKING LOAD	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2056

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2150	BENDING ENDURANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2150.
2148	BENDING ENDURANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-915.
2152	THE TENSION DURING TEST SHALL BE 2152 POUND(S) PER SQUARE INCH.
2158	THE TENSION DURING TEST SHALL BE 2158 KILOPASCAL(S).
2154	THE SPECIMEN LENGTH SHALL BE 2154 INCH(S).
2160	THE SPECIMEN LENGTH SHALL BE 2160 MILLIMETER(S).
2156	THE TEST TEMPERATURE SHALL BE 2156 DEGREE(S) CELSIUS.
2162	THE BENDING RATE SHALL BE 2162 CYCLES PER MINUTE.
2164	THE VOLTAGE WITHSTAND TEST SHALL BE PERFORMED.
2172	THE TEST VOLTAGE SHALL BE 2172 VOLTS AC.
2173	THE TEST VOLTAGE SHALL BE 2173 VOLTS DC.
2056	BREAKING LOAD. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2056.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
BREAKING LOAD (CONT)	
REQUIREMENTS (CONT)	
MINIMUM BREAKING LOAD (SELECT ONE)	
(POUNDS)	2048
(KILOGRAMS)	2054
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2050
PER MIL-C-55668.	2052
CAPACITANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2020
MAXIMUM CAPACITANCE (SELECT ONE)	
(PICOFARADS PER FOOT)	2022
(PICOFARADS PER METER)	2018
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2014
PER MIL-C-3883.	2012
TEST FREQUENCY (HERTZ)	2016

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2048	BREAKING LOAD. THE BREAKING LOAD SHALL BE NOT LESS THAN 2048 POUND(S).
2054	BREAKING LOAD. THE BREAKING LOAD SHALL BE NOT LESS THAN 2054 KILOGRAM(S).
2050	BREAKING LOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2050.
2052	BREAKING LOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-55668.
2020	CAPACITANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2020.
2022	CAPACITANCE. THE CAPACITANCE SHALL BE NOT GREATER THAN 2022 PICOFARAD(S) PER FOOT.
2018	CAPACITANCE. THE CAPACITANCE SHALL BE NOT GREATER THAN 2018 PICOFARAD(S) PER METER.
2014	CAPACITANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2014.
2012	CAPACITANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-3883.
2016	THE TEST FREQUENCY SHALL BE 2016 HERTZ.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
COLD BENDING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2086
NO CRACKS, FLAWS OR DAMAGE.	2088
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2062
PER MIL-C-55668.	2060
SPECIMEN LENGTH (SELECT ONE)	
(INCHES)	2064
(MILLIMETERS)	2068
DIAMETER OF MANDREL (SELECT ONE)	
(INCHES)	2066
(MILLIMETERS)	2070
COLD CHAMBER TEMPERATURE (DEGREES CELSIUS)	2072
TEST DURATION (HOURS)	2078
NUMBER OF TURNS (NUMBER)	2080
RATE OF TURNS PER SECOND (NUMBER)	2082

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2086	COLD BENDING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2086.
2088	COLD BENDING. THE JACKET OR INSULATION OF THE CORD SHALL EXHIBIT NO EVIDENCE OF CRACKS, FLAWS, OR OTHER DAMAGE.
2062	COLD BENDING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2062.
2060	COLD BENDING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-55668.
2064	THE SPECIMEN LENGTH SHALL BE 2064 INCH(S).
2068	THE SPECIMEN LENGTH SHALL BE 2068 MILLIMETER(S).
2066	THE MANDREL DIAMETER SHALL BE 2066 INCH(S).
2070	THE MANDREL DIAMETER SHALL BE 2070 MILLIMETER(S).
2072	THE COLD CHAMBER TEMPERATURE SHALL BE 2072 DEGREES CELSIUS.
2078	THE TEST DURATION SHALL BE 2078 HOUR(S).
2080	THE NUMBER OF SPECIMEN TURNS AROUND THE MANDREL SHALL BE 2080.
2082	THE RATE SHALL BE 2082 TURNS PER SECOND.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONDUCTOR ELONGATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2432
MINIMUM ELONGATION (PERCENT)	2434
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2426
PER FED-STD-228	2427
*METHOD (SELECT ONE)	
3211, SOFT.	2428
3212, HARD.	2429
NUMBER OF SPECIMENS (NUMBER)	2430
CONDUCTOR RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1946
MAXIMUM CONDUCTOR RESISTANCE (SELECT ONE)	
(OHMS PER 1000 FEET)	1948

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2432	CONDUCTOR ELONGATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2432.
2434	CONDUCTOR ELONGATION. THE ELONGATION SHALL BE NOT LESS THAN 2434 PERCENT OF THE ORIGINAL LENGTH.
2426	CONDUCTOR ELONGATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2426.
2427	CONDUCTOR ELONGATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH FED-STD-228.
2428	TEST METHOD 3211 SHALL APPLY.
2429	TEST METHOD 3212 SHALL APPLY.
2430	THE NUMBER OF SPECIMENS SHALL BE 2430.
1946	CONDUCTOR RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1946.
1948	CONDUCTOR RESISTANCE. THE RESISTANCE SHALL BE NOT GREATER THAN 1948 OHM(S) PER 1000 FEET.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONDUCTOR RESISTANCE (CONT)	
MAXIMUM CONDUCTOR RESISTANCE (CONT)	
(OHMS PER KILOMETER)	1949
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1940
PER FED-STD-228, METHOD 6021.	1938
TEST TYPE (SELECT ONE)	
FACTORY.	1942
LABORATORY.	1945
IMMERSION PERIOD (HOURS)	1944
NUMBER OF SPECIMENS (NUMBER)	1943
CONDUCTOR STRAND RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2044

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1949	CONDUCTOR RESISTANCE. THE RESISTANCE SHALL BE NOT GREATER THAN 1949 OHM(S) PER KILOMETER.
1940	CONDUCTOR RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1940.
1938	CONDUCTOR RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 6021 OF FED-STD-228.
1942	THE TEST TYPE SHALL BE FACTORY.
1945	THE TEST TYPE SHALL BE LABORATORY.
1944	THE IMMERSION PERIOD SHALL BE 1944 HOUR(S).
1943	THE NUMBER OF SPECIMENS SHALL BE 1943.
2044	CONDUCTOR STRAND RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2044.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR. CODE
CONDUCTOR STRAND RESISTANCE (CONT)	
MAXIMUM STRAND RESISTANCE (SELECT ONE)	
(OHMS PER FOOT)	2046
(OHMS PER METER)	2045
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2038
PER FED-STD-228, METHOD 6021.	2036
TEST TYPE (SELECT ONE)	
FACTORY.	2040
LABORATORY.	2043
IMMERSION PERIOD (HOURS)	2042
NUMBER OF SPECIMENS (NUMBER)	2041
CONDUCTOR TENSILE STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2444

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2046	CONDUCTOR STRAND RESISTANCE. THE RESISTANCE SHALL BE NOT GREATER THAN 2046 OHM(S) PER FOOT.
2045	CONDUCTOR STRAND RESISTANCE. THE RESISTANCE SHALL BE NOT GREATER THAN 2045 OHM(S) PER METER.
2038	CONDUCTOR STRAND RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2038.
2036	CONDUCTOR STRAND RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 6021 OF FED-STD-228.
2040	THE TEST TYPE SHALL BE FACTORY.
2043	THE TEST TYPE SHALL BE LABORATORY.
2042	THE IMMERSION PERIOD SHALL BE 2042 HOUR(S).
2041	THE NUMBER OF SPECIMENS SHALL BE 2041.
2444	CONDUCTOR TENSILE STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2444.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONDUCTOR TENSILE STRENGTH (CONT)	
MINIMUM TENSILE STRENGTH (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2446
(KILOPASCALS)	2442
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2438
PER FED-STD-228.	2439
*METHOD (SELECT ONE)	
3211, SOFT.	2440
3212, HARD.	2441
NUMBER OF SPECIMENS (NUMBER)	2436
CONTINUITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1934
NO OPEN CIRCUITS.	1936

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2446	CONDUCTOR TENSILE STRENGTH. THE TENSILE STRENGTH SHALL BE NOT LESS THAN 2446 POUND(S) PER SQUARE INCH.
2442	CONDUCTOR TENSILE STRENGTH. THE TENSILE STRENGTH SHALL BE NOT LESS THAN 2442 KILOPASCAL(S).
2438	CONDUCTOR TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2438.
2439	CONDUCTOR TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH FED-STD-228.
2440	TEST METHOD 3211 SHALL APPLY.
2441	TEST MEDHOD 3212 SHALL APPLY.
2436	THE NUMBER OF SPECIMENS SHALL BE 2436.
1934	CONTINUITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1934.
1936	CONTINUITY. THERE SHALL BE NO OPEN CIRCUITS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTINUITY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1926
PER MIL-C-55668.	1928
CORD RETRACTILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2366
MAXIMUM RETRACTION (PERCENT OF ORIGINAL LENGTH)	2368
RETRACTION DURATION (SECONDS)	2370
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2358
PER MIL-C-55668.	2364
EXTENSION (TIMES RETRACTED LENGTH)	2360
CYCLES (NUMBER)	2362

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1926	CONTINUITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1926.
1928	CONTINUITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-55668.
2366	CORD RETRACTILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2366.
2368	CORD RETRACTILITY. THE RETRACTED LENGTH SHALL BE NOT GREATER THAN 2368 PERCENT OF THE ORIGINAL LENGTH.
2370	THE RETRACTION DURATION SHALL BE 2370 SECOND(S).
2358	CORD RETRACTILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2358.
2364	CORD RETRACTILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-55658.
2360	THE EXTENSION SHALL BE 2360 TIMES THE RETRACTED LENGTH.
2362	THE NUMBER OF EXTENSION CYCLES SHALL BE 2362.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLAMMABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2206
AS FOLLOWS:	2207
FLAME DISTANCE (SELECT ONE)	
(INCHES)	2208
(MILLIMETERS)	2204
MAXIMUM FLAME DURATION (SECONDS)	2210
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2198
PER FED-STD-228	2199
*METHOD (SELECT ONE)	
5211.	2200
5221.	2201
5231.	2203
HEATING DURATION (SECONDS)	2202

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2206	FLAMMABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2206.
2207	FLAMMABILITY. THE FLAMMABILITY SHALL BE AS FOLLOWS:
2208	THE FLAME DISTANCE SHALL BE NOT GREATER THAN 2208 INCH(S).
2204	THE FLAME DISTANCE SHALL BE NOT GREATER THAN 2204 MILLIMETER(S).
2210	THE FLAME DURATION SHALL BE NOT GREATER THAN 2210 SECOND(S).
2198	FLAMMABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2198.
2199	FLAMMABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH FED-STD-228.
2200	TEST METHOD 5211 SHALL APPLY.
2201	TEST METHOD 5221 SHALL APPLY.
2203	TEST METHOD 5231 SHALL APPLY.
2202	THE HEATING DURATION SHALL BE 2202 SECOND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLAMMABILITY (CONT)	
PER FED-STD-228 (CONT)	
NUMBER OF SPECIMENS (NUMBER)	2205
FLEXIBILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2242
NO FLAKING, BREAKING, DAMAGE, CHANGE IN APPEARANCE OR EVIDENCE OF STRAIN.	2244
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2236
PER FED-STD-228	2237
*METHOD (SELECT ONE)	
2031.	2238
2051.	2239
TEMPERATURE (DEGREES CELSIUS)	2240
NUMBER OF SPECIMENS (NUMBER)	2241

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2205	THE NUMBER OF SPECIMENS SHALL BE 2205.
2242	FLEXIBILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2242.
2244	FLEXIBILITY. THERE SHALL BE NO FLAKING, DAMAGE, CHANGE IN APPEARANCE OR EVIDENCE OF STRAIN.
2236	FLEXIBILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2236.
2237	FLEXIBILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH FED-STD-228.
2238	METHOD 2031 SHALL APPLY.
2239	METHOD 2051 SHALL APPLY.
2240	THE TEST TEMPERATURE SHALL BE 2240 DEGREES CELSIUS.
2241	THE NUMBER OF SPECIMENS SHALL BE 2241.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4760
FUNGUS RESISTANT BY CERTIFICATION OR BY TEST.	4761
NO EVIDENCE OF FUNGUS GROWTH WHEN TESTED.	4762
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4754
PER MIL-STD-810, METHOD 508.	4755
TEST PERIOD (DAYS)	4756
HIGH TEMPERATURE RETRACTION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2320
MAXIMUM RETRACTION (PERCENT OF ORIGINAL LENGTH)	2322
RETRACTION DURATION (SECONDS)	2324

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4760	FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.
4761	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED, THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4762	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4754	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.
4755	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.
4756	TEST PERIOD SHALL BE 4756 DAY(S).
2320	HIGH TEMPERATURE RETRACTION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2320.
2322	HIGH TEMPERATURE RETRACTION. THE RETRACTED LENGTH SHALL BE NOT GREATER THAN 2322 PERCENT OF THE ORIGINAL LENGTH.
2324	THE RETRACTION DURATION SHALL BE 2324 SECOND(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HIGH TEMPERATURE RETRACTION (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2306
PER MIL-C-55668.	2312
EXTENSION (TIMES RETRACTED LENGTH)	2308
CONDITIONING TEMPERATURE (DEGREES CELSIUS)	2310
CONDITIONING DURATION (HOURS)	2316
CYCLES (NUMBER)	2314
INSULATION ELONGATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2122
ELONGATION (PERCENT)	2124
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2114
PER FED-STD-228, METHOD 3031.	2116
NUMBER OF SPECIMENS (NUMBER)	2118

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2306	HIGH TEMPERATURE RETRACTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2306.
2312	HIGH TEMPERATURE RETRACTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-55668.
2308	THE EXTENSION SHALL BE 2308 TIMES THE RETRACTED LENGTH.
2310	THE CONDITIONING TEMPERATURE SHALL BE 2310 DEGREES CELSIUS.
2316	THE CONDITIONING DURATION SHALL BE 2316 HOUR(S)
2314	THE NUMBER OF EXTENSION CYCLES SHALL BE 2314.
2122	INSULATION ELONGATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2122.
2124	INSULATION ELONGATION. THE ELONGATION SHALL BE NOT LESS THAN 2124 PERCENT OF THE ORIGINAL LENGTH.
2114	INSULATION ELONGATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2114.
2116	INSULATION ELONGATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3031 OF FED-STD-228.
2118	THE NUMBER OF SPECIMENS SHALL BE 2118.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1960
MINIMUM INSULATION RESISTANCE (SELECT ONE)	
(MEGOHMS PER 1000 FEET)	1962
(MEGOHMS PER KILOMETER)	1958
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1952
PER FED-STD-228, METHOD 6031.	1951
TEST VOLTAGE (VOLTS DC)	1954
TEST TEMPERATURE (DEGREES CELSIUS)	1955
IMMERSION SOLUTION (TYPE)	1956
IMMERSION PERIOD (HOURS)	1950
MEASURED AFTER CIRCUIT CLOSED (MINUTES)	1957
INSULATION TENSILE STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2142

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1960	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1960.
1962	INSULATION RESISTANCE. THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 1962 MEGOHM(S) PER 1000 FEET.
1958	INSULATION RESISTANCE. THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 1958 MEGOHM(S) PER KILOMETER.
1952	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1952.
1951	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 6031 OF FED-STD-228.
1954	THE TEST VOLTAGE SHALL BE 1954 VOLT(S) DC.
1955	THE TEST TEMPERATURE SHALL BE 1955 DEGREES CELSIUS.
1956	THE IMMERSION SOLUTION SHALL BE 1956.
1950	THE IMMERSION PERIOD SHALL BE 1950 HOUR(S).
1957	THE PERIOD AFTER THE CIRCUIT IS CLOSED BEFORE MEASUREMENT SHALL BE 1957 MINUTE(S).
2142	INSULATION TENSILE STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2142.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION TENSILE STRENGTH (CONT)	
REQUIREMENTS (CONT)	
MINIMUM TENSILE STRENGTH (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2144
(KILOPASCALS)	2140
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2134
PER FED-STD-228, METHOD 3111.	2136
NUMBER OF SPECIMENS (NUMBER)	2138
LOW TEMPERATURE EXTENSION AND RETRACTION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2278
AS FOLLOWS:	2282
NO PHYSICAL DAMAGE.	2280

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2144	INSULATION TENSILE STRENGTH. THE TENSILE STRENGTH SHALL BE NOT LESS THAN 2144 POUND(S) PER SQUARE INCH.
2140	INSULATION TENSILE STRENGTH. THE TENSILE STRENGTH SHALL BE NOT LESS THAN 2140 KILOPASCAL(S).
2134	INSULATION TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2134.
2136	INSULATION TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3111 OF FED-STD-228.
2138	THE NUMBER OF SPECIMENS SHALL BE 2138.
2278	LOW TEMPERATURE EXTENSION AND RETRACTION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2278.
2282	LOW TEMPERATURE EXTENSION AND RETRACTION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS.
2280	THERE SHALL BE NO PHYSICAL DAMAGE OR DEGRADATION.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LOW TEMPERATURE EXTENSION AND RETRACTION (CONT)	
AS FOLLOWS: (CONT)	
EXTENSION FORCE (SELECT ONE)	
(OUNCES)	2270
(NEWTONS)	2276
MAXIMUM RETRACTION (PERCENT OF ORIGINAL LENGTH)	2281
RETRACTION DURATION (SECONDS)	2284
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2272
PER MIL-C-55668.	2274
TEST TEMPERATURE (DEGREES CELSIUS)	2275
EXTENSION (TIMES RETRACTED LENGTH)	2286
MOISTURE RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1400
NO EVIDENCE OF CORROSION OF PHYSICAL DAMAGE.	1396
NO DIELECTRIC OR INSULATION BREAKDOWN.	2488
REQUIREMENTS AFTER TEST SHALL BE ____	2490

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2270	THE EXTENSION FORCE SHALL BE 2270 OUNCE(S).
2276	THE EXTENSION FORCE SHALL BE 2276 NEWTON(S).
2281	THE RETRACTED LENGTH SHALL BE NOT GREATER THAN 2281 PERCENT OF THE ORIGINAL LENGTH.
2284	THE RETRACTION DURATION SHALL BE 2284 SECOND(S).
2272	LOW TEMPERATURE EXTENSION AND RETRACTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2272.
2274	LOW TEMPERATURE EXTENSION AND RETRACTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-55668.
2275	THE TEST TEMPERATURE SHALL BE 2275 DEGREES CELSIUS.
2286	THE EXTENSION SHALL BE 2286 TIMES THE RETRACTED LENGTH.
1400	MOISTURE RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1400.
1396	MOISTURE RESISTANCE. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
2488	THERE SHALL BE NO DIELECTRIC OR INSULATION BREAKDOWN.
2490	THE REQUIREMENT(S) AFTER THE TEST SHALL BE 2490.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1391
PER MIL-STD-202, METHOD 106.	1397
POLARIZING VOLTAGE (VOLTS, DC)	1395
INITIAL MEASUREMENTS SHALL BE ____	2484
LOADING VOLTAGE (VOLTS)	2487
FINAL MEASUREMENTS SHALL BE ____	2486
STEP 7A NOT APPLICABLE.	4985
STEP 7B NOT APPLICABLE.	4986
MUTUAL INDUCTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1992
MAXIMUM INDUCTANCE (SELECT ONE)	
(MICROHENRIES PER FOOT)	1994
(MICROHENRIES PER METER)	1996

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1391 MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1391.

1397 MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 106 OF MIL-STD-202.

1395 POLARIZING VOLTAGE SHALL BE 1395 VOLTS, DC.

2484 THE INITIAL MEASUREMENTS SHALL BE 2484.

2487 THE LOADING VOLTAGE SHALL BE 2487 VOLT(S).

2486 THE FINAL MEASUREMENTS SHALL BE 2486.

4985 STEP 7A OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.

4986 STEP 7B OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.

1992 MUTUAL INDUCTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1992.

1994 MUTUAL INDUCTANCE. THE MUTUAL INDUCTANCE SHALL BE NOT GREATER THAN 1994 MICROHENRY(S) PER FOOT.

1996 MUTUAL INDUCTANCE. THE MUTUAL INDUCTANCE SHALL BE NOT GREATER THAN 1996 MICROHENRY(S) PER METER.

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MUTUAL INDUCTANCE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1982
PER MIL-C-915.	1986
FREQUENCY (HERTZ)	1988
RETRACTION AFTER STATIC LOADING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2336
MAXIMUM RETRACTION (PERCENT OF ORIGINAL LENGTH)	2338
RETRACTION DURATION (MINUTES)	2340
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2328
PER MIL-C-55668.	2334
EXTENSION (PERCENT)	2330
EXTENSION PERIOD (HOURS)	2332

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1982	MUTUAL INDUCTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1982.
1986	MUTUAL INDUCTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-915.
1988	THE TEST FREQUENCY SHALL BE 1988 HERTZ.
2336	RETRACTION AFTER STATIC LOADING. THE REQUIREMENTS SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2336.
2338	RETRACTION AFTER STATIC LOADING. THE RETRACTED LENGTH SHALL BE NOT GREATER THAN 2338 PERCENT OF THE ORIGINAL LENGTH.
2340	THE RETRACTION DURATION SHALL BE 2340 MINUTE(S).
2328	RETRACTION AFTER STATIC LOADING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2328.
2334	RETRACTION AFTER STATIC LOADING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-55668.
2330	THE EXTENSION SHALL BE 2330 PERCENT OF THE ORIGINAL LENGTH.
2332	THE EXTENSION PERIOD SHALL BE 2332 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INCEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEA WATER RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2108
MAXIMUM WEIGHT CHANGE (SELECT ONE)	
(MILLIGRAMS PER SQUARE INCH OF WETTED SURFACE)	2110
(MILLIGRAMS PER SQUARE MILLIMETER OF WETTED SURFACE)	2090
NO EVIDENCE OF CHEMICAL REACTION OR OTHER DELETERIOUS EFFECTS.	2091
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2092
PER MIL-C-3849.	2102
SPECIMEN LENGTH (SELECT ONE)	
(FEET)	2094
(METERS)	2104

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2108	SEA WATER RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2108.
2110	SEA WATER RESISTANCE. THE WEIGHT CHANGE SHALL BE NOT GREATER THAN 2110 MILLIGRAM(S) PER SQUARE INCH OF WETTED SURFACE.
2090	SEA WATER RESISTANCE. THE WEIGHT CHANGE SHALL BE NOT GREATER THAN 2090 MILLIGRAM(S) PER SQUARE MILLIMETER OF WETTED SURFACE.
2091	SEA WATER RESISTANCE. THERE SHALL BE NO EVIDENCE OF CHEMICAL REACTION OR OTHER DELETERIOUS EFFECTS.
2092	SEA WATER RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2092.
2102	SEA WATER RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-3849.
2094	THE SPECIMEN LENGTH SHALL BE 2094 FEET.
2104	THE SPECIMEN LENGTH SHALL BE 2104 METER(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEA WATER RESISTANCE (CONT)	
PER MIL-C-3849 (CONT)	
SALT WATER SOLUTION SODIUM CHLORIDE (PERCENT)	2096
IMMERSION DURATION (DAYS)	2098
TEST TEMPERATURE (DEGREES CELSIUS)	2100
TENSION SET	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2380
MAXIMUM TENSION SET (PERCENT)	2382
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2374
PER FED-STD-228, METHOD 3161.	2376
ELONGATION (SELECT ONE)	
(INCHES)	2378
(METERS)	2379
ELONGATION DURATION (MINUTES)	2381
DURATION AFTER RELEASE (MINUTES)	2384
NUMBER OF SPECIMENS (NUMBER)	2386

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2096	THE SALT WATER SOLUTION SHALL BE COMPOSED OF DISTILLED WATER AND A 2096 PERCENT SOLUTION OF SODIUM CHLORIDE.
2098	THE IMMERSION DURATION SHALL BE 2098 DAYS(S).
2100	THE TEST TEMPERATURE SHALL BE 2100 DEGREES CELSIUS.
2380	TENSION SET. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2380.
2382	TENSION SET. THE TENSION SET SHALL BE NOT GREATER THAN 2382 PERCENT OF THE ORIGINAL LENGTH.
2374	TENSION SET. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2374.
2376	TENSION SET. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3161 OF FED-STD-228.
2378	THE ELONGATION SHALL BE 2378 INCH(S).
2379	THE ELONGATION SHALL BE 2379 METER(S).
2381	THE ELONGATION DURATION SHALL BE 2381 MINUTE(S).
2384	THE DURATION AFTER RELEASE SHALL BE 2384 MINUTE(S).
2386	THE NUMBER OF SPECIMENS SHALL BE 2386.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TIN COATING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2420
PER ASTMB33.	2422
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2414
PER ASTMB33.	2416
TWISTING ENDURANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2192
NO BREAKING OF CONDUCTORS OR CRACKING OF INSULATION OR JACKET.	2194
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2176
PER MIL-C-915	2174

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
2420	TIN COATING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2420.
2422	TIN COATING. THE CONDUCTOR STRAND TIN COATING SHALL MEET THE REQUIREMENTS OF ASTMB33.
2414	TIN COATING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2414.
2416	TIN COATING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMB33.
2191	TWISTING ENDURANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2192.
2194	TWISTING ENDURANCE. THE CORD SHALL EXHIBIT NO EVIDENCE OF BREAKING OF CONDUCTORS OR CRACKING OF INSULATION OR JACKET.
2176	TWISTING ENDURANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2176.
2174	TWISTING ENDURANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-915.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TWISTING ENDURANCE (CONT)	
PER MIL-C-915 (CONT)	
TENSION (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2178
(KILOPASCALS)	2180
TEST TEMPERATURE (DEGREES CELSIUS)	2182
NUMBER OF CYCLES (NUMBER)	2188
VOLTAGE WITHSTAND	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1974
NO EVIDENCE OF DIELECTRIC BREAKDOWN.	1976
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1966
PER FED-STD-228, METHOD 6111.	1970
TEST VOLTAGE (SELECT ONE)	
(VOLTS AC)	1968
(VOLTS DC)	1969
IMMERSION PERIOD (HOURS)	1964
VOLTAGE APPLICATION PERIOD (MINUTES)	1972

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2178	THE TENSION SHALL BE 2178 POUND(S) PER SQUARE INCH.
2180	THE TENSION SHALL BE 2180 KILOPASCAL(S).
2182	THE TEST TEMPERATURE SHALL BE 2182 DEGREES CELSIUS.
2188	THE NUMBER OF CYCLES SHALL BE 2188.
1974	VOLTAGE WITHSTAND. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1974.
1976	VOLTAGE WITHSTAND. THERE SHALL BE NO EVIDENCE OF DIELECTRIC BREAKDOWN.
1966	VOLTAGE WITHSTAND. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1966.
1970	VOLTAGE WITHSTAND. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 6111 OF FED-STD-228.
1968	THE TEST VOLTAGE SHALL BE 1968 VOLT(S) AC.
1969	THE TEST VOLTAGE SHALL BE 1969 VOLT(S) DC.
1964	THE IMMERSION PERIOD SHALL BE 1964 HOUR(S).
1972	THE VOLTAGE APPLICATION PERIOD SHALL BE 1972 MINUTE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-130.	7629

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currenversion before use.

CHAR CODE	STANDARD PARAGRAPH
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995
END SEALS (SELECT ONE)	
BOTH ENDS SEALED ACCORDING TO BEST PRACTICE.	2480
BOTH ENDS SEALED.	2482
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.
2480	END SEALS. ALL CORDS SHALL HAVE BOTH ENDS OF EACH SHIPPING LENGTH SEALED TO PREVENT ENTRANCE OF MOISTURE. SEALING MATERIALS AND METHODS OF APPLICATION SHALL BE IN ACCORDANCE WITH BEST COMMERCIAL PRACTICES.
2482	END SEALS. ALL CORDS SHALL HAVE BOTH ENDS OF EACH SHIPPING LENGTH SEALED TO PREVENT ENTRANCE OF MOISTURE.

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI


(Project EDS-A261)

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.


APPENDIX A

ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

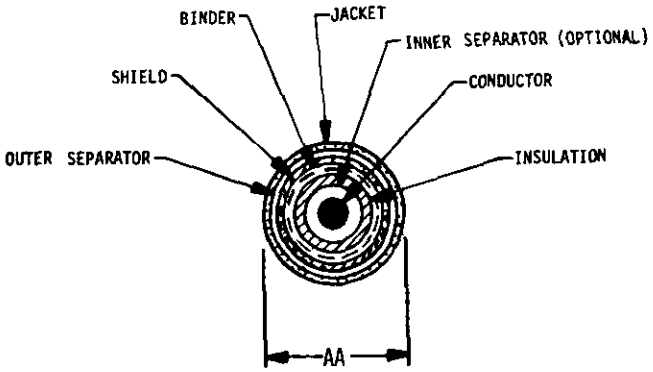


034-01-1

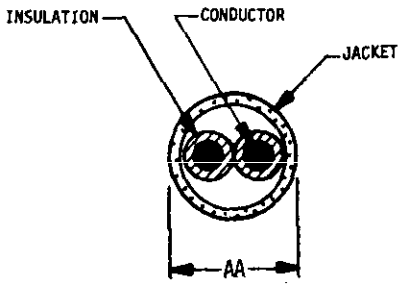


034-02-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

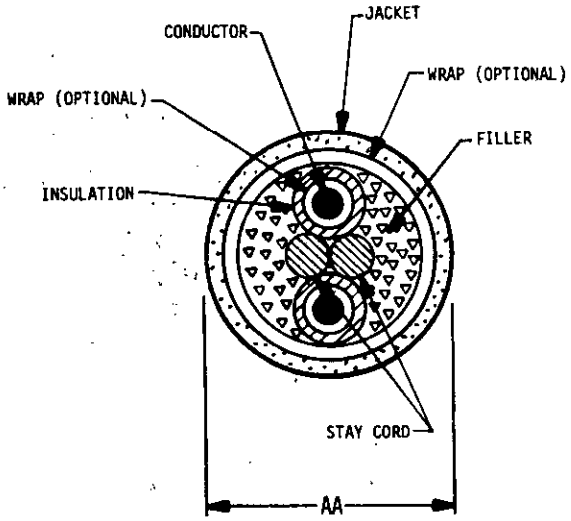


034-02-2

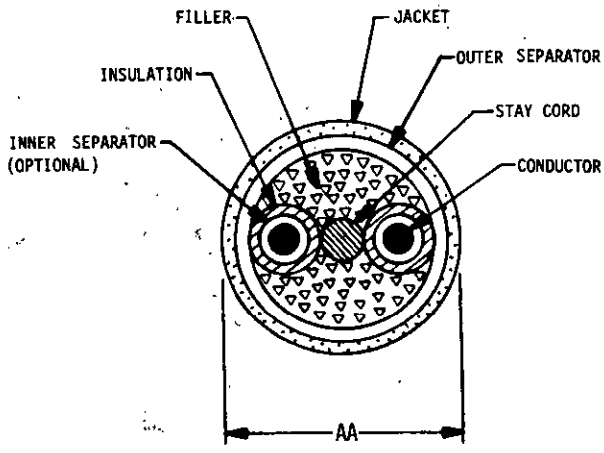


034-02-3

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

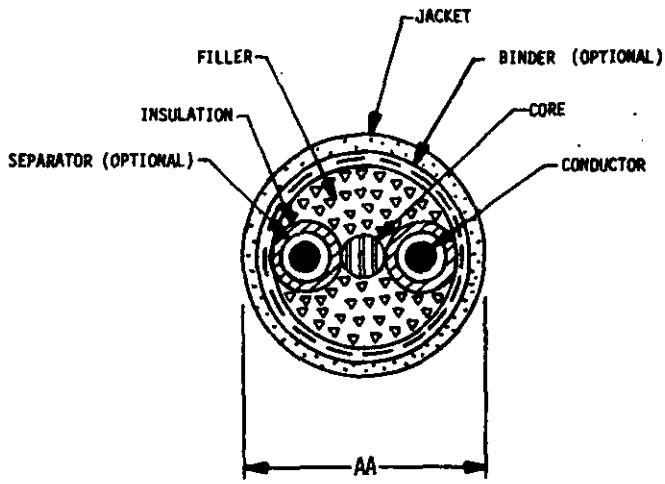


034-02-4

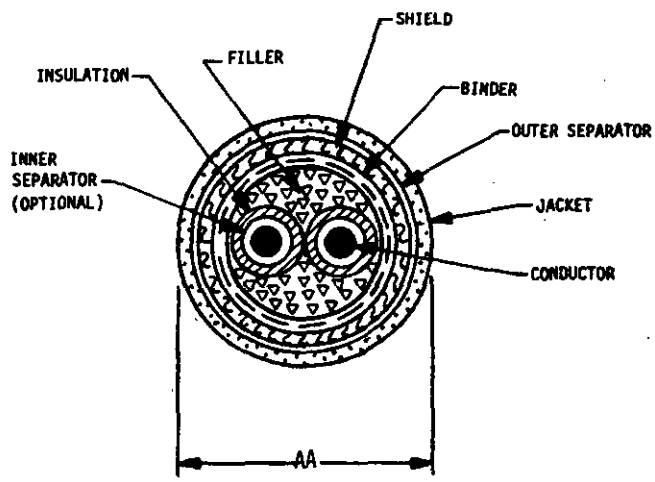


034-02-5


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

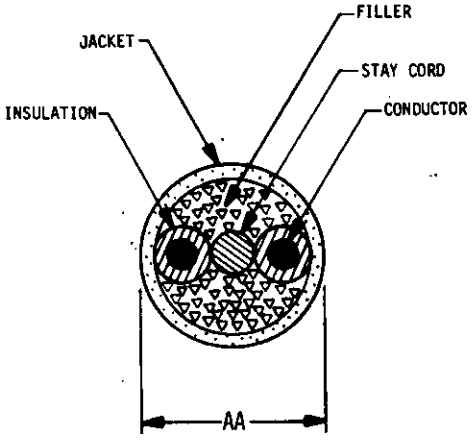


034-02-6

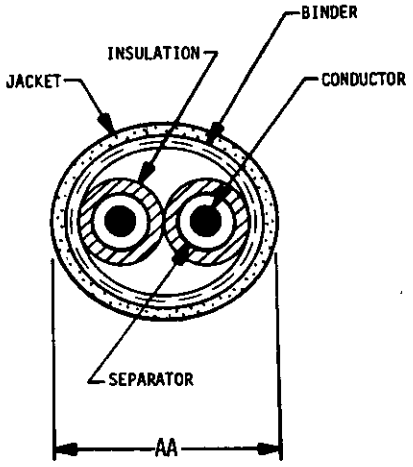

034-02-7

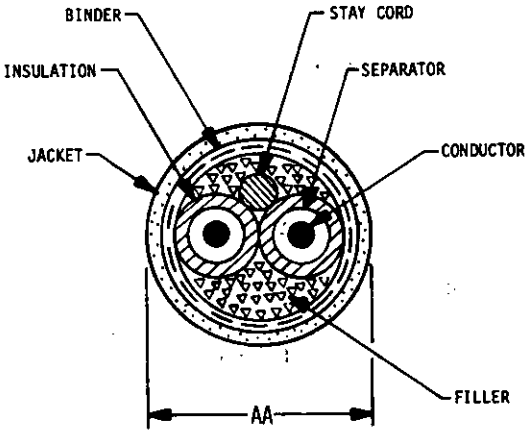


034-02-8

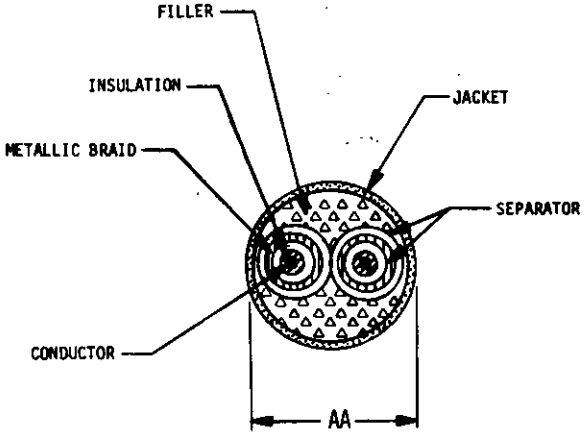


034-02-9


Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

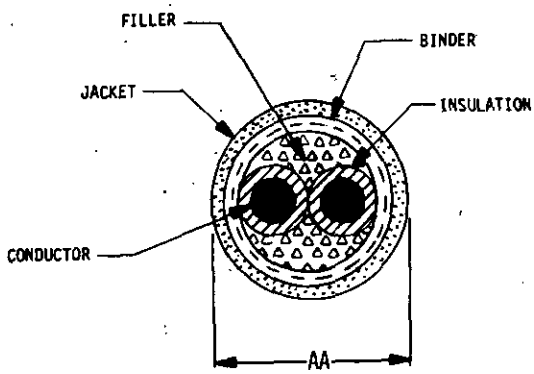


034-02-10

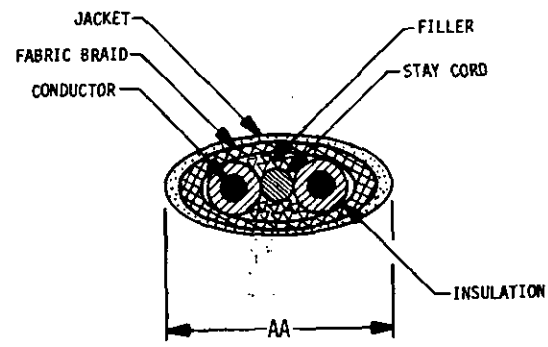

034-02-11

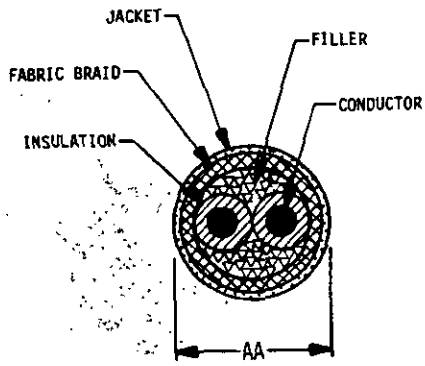


034-02-12




034-02-13


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.



034-03-1

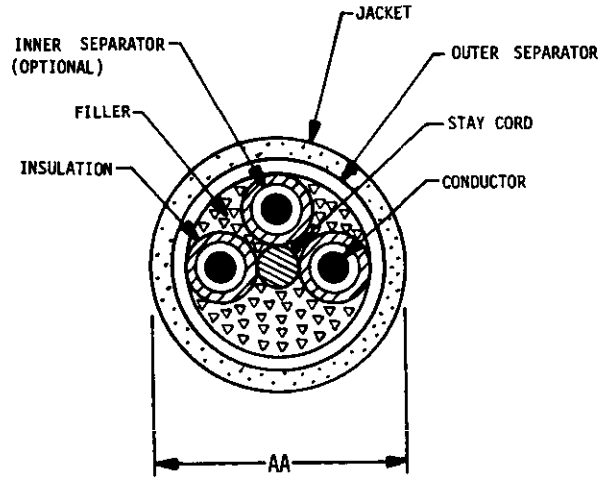


034-03-2

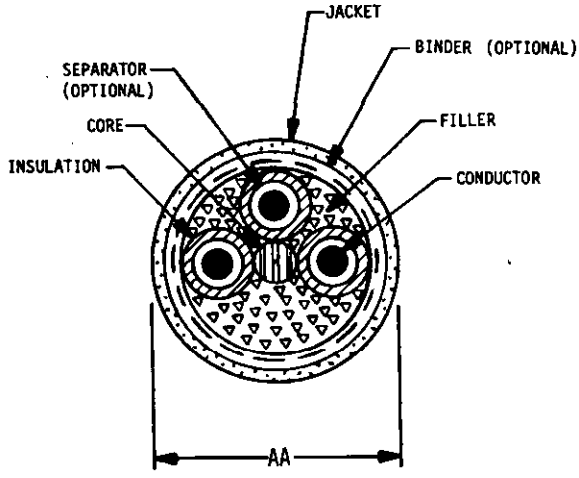


034-03-3


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

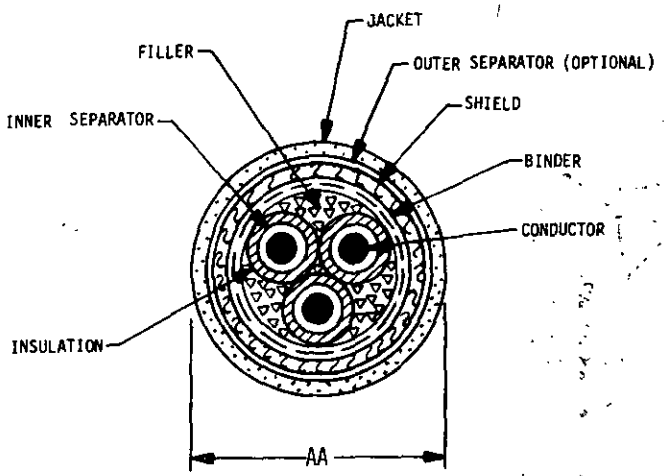

034-03-4

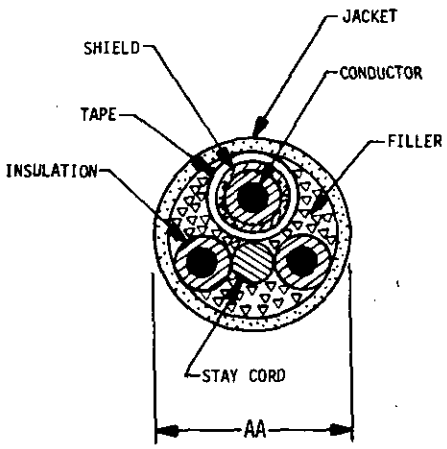


034-03-5

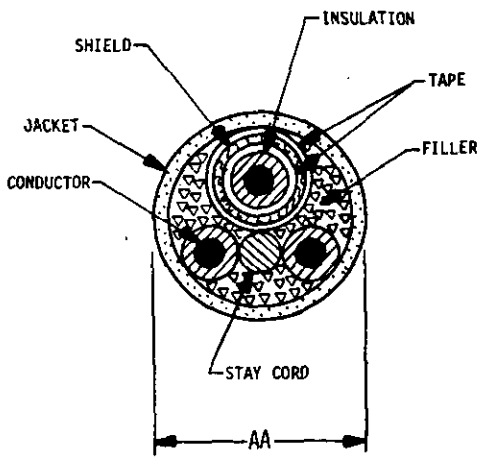


034-03-6


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

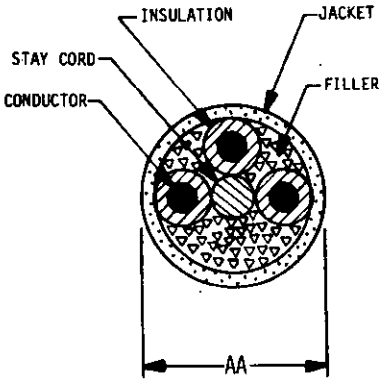


034-03-7

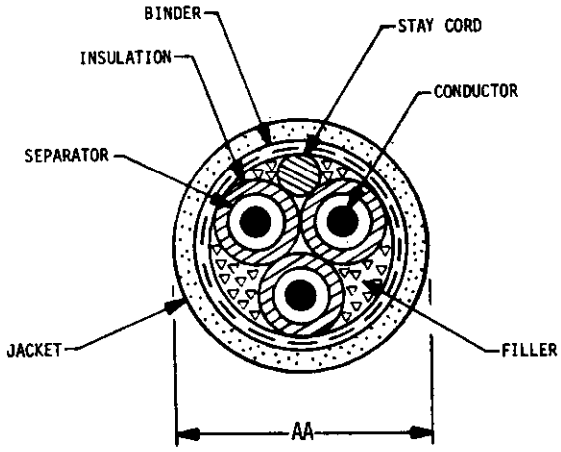

034-03-8

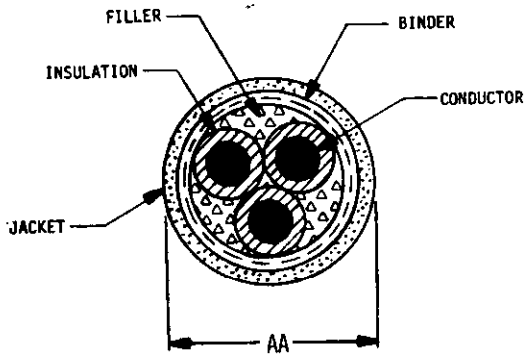


034-03-9




034-03-10


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

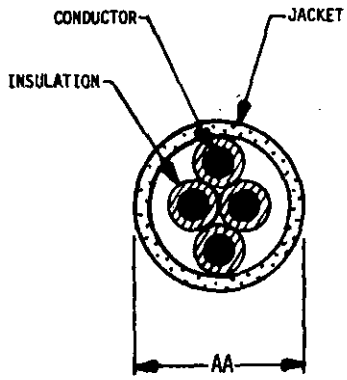

Ø34-Ø4-1

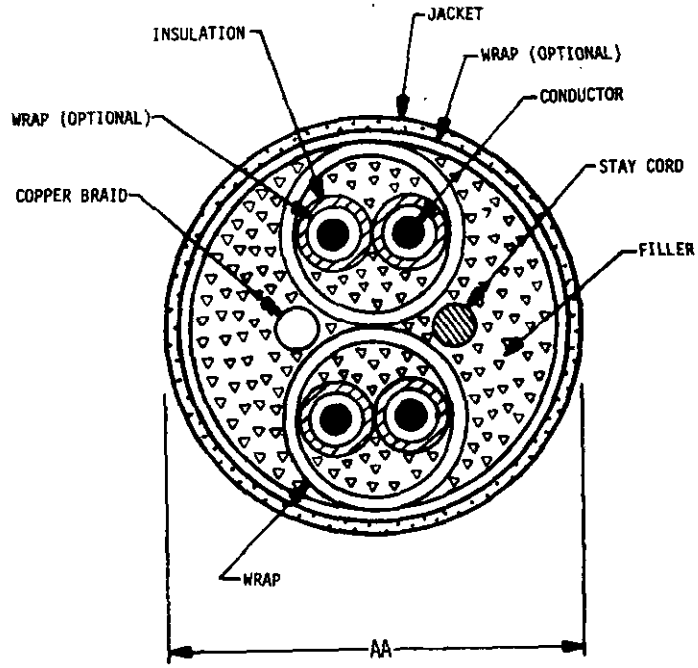


Ø34-Ø4-2

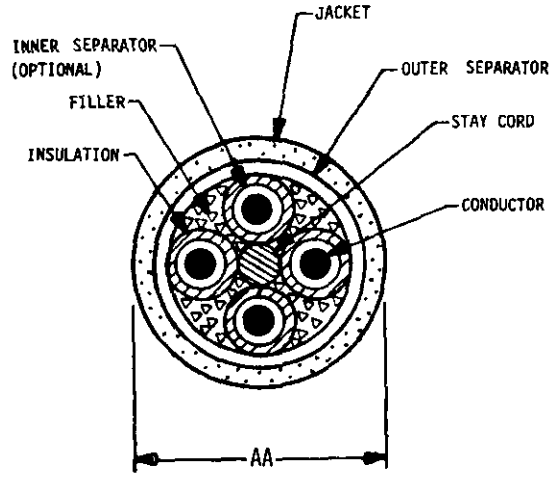


Ø34-Ø4-3


Source: https://assist.dla.mil -- Downloaded: 2026Ø1Ø-26T07:24Z
Check the source to verify that this is the current version before use.

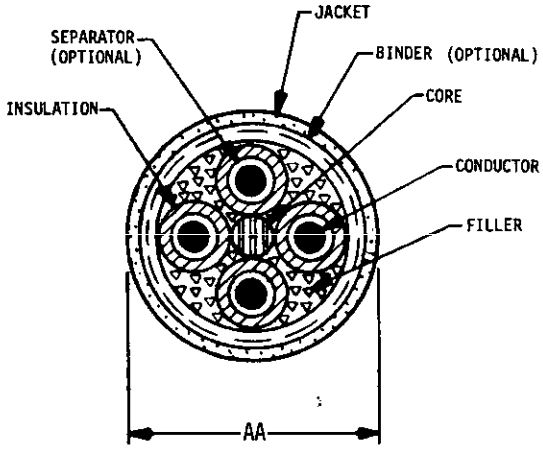

034-04-4

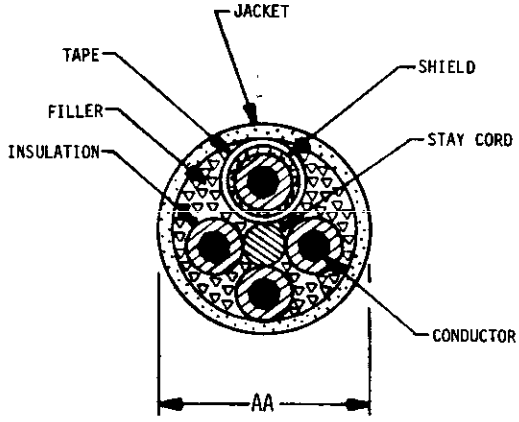


034-04-6

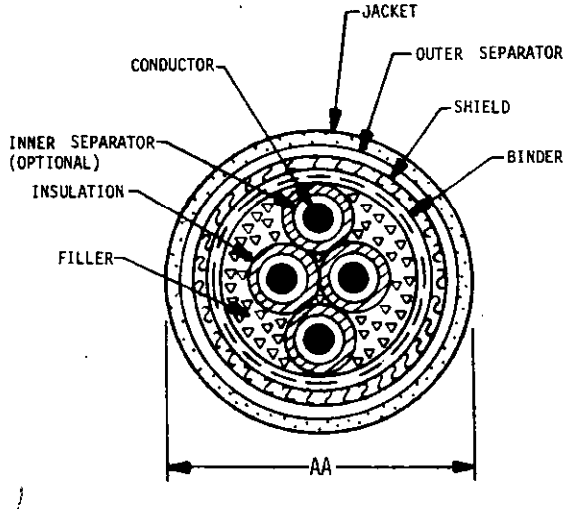


034-04-5


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

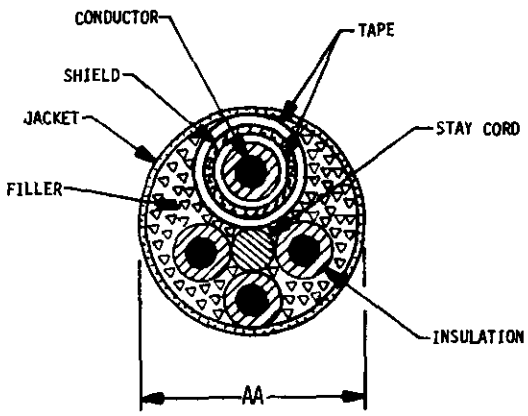


034-04-7

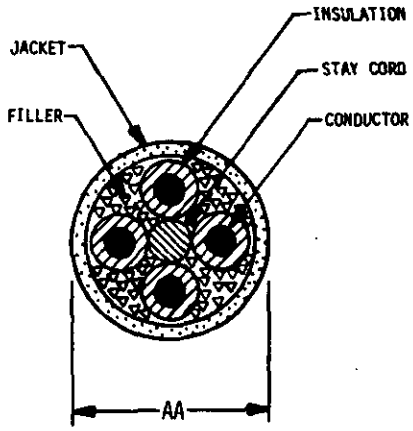

034-04-8

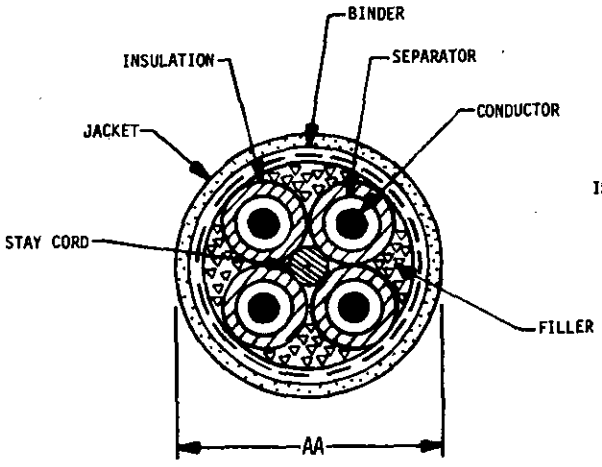


034-04-9

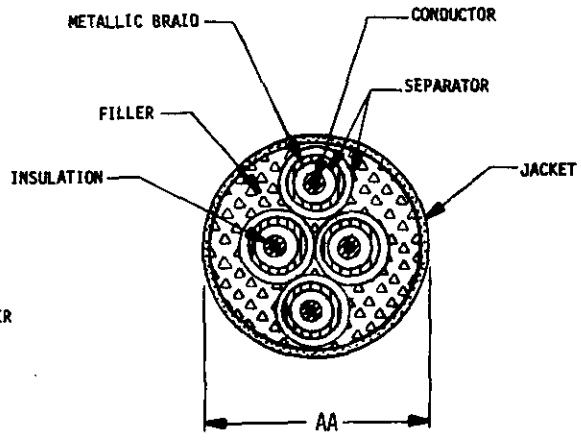


034-04-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

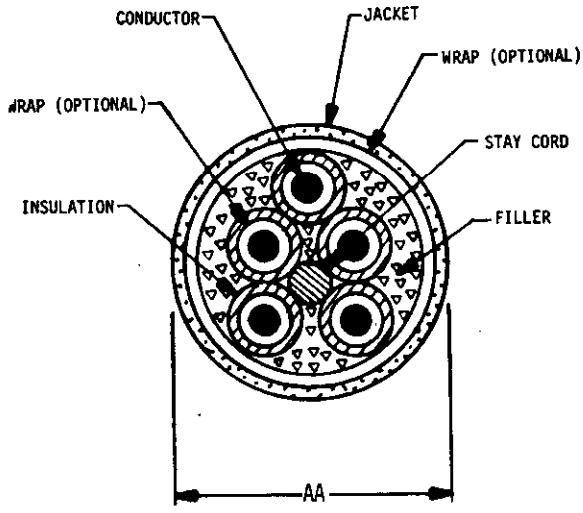


034-05-1

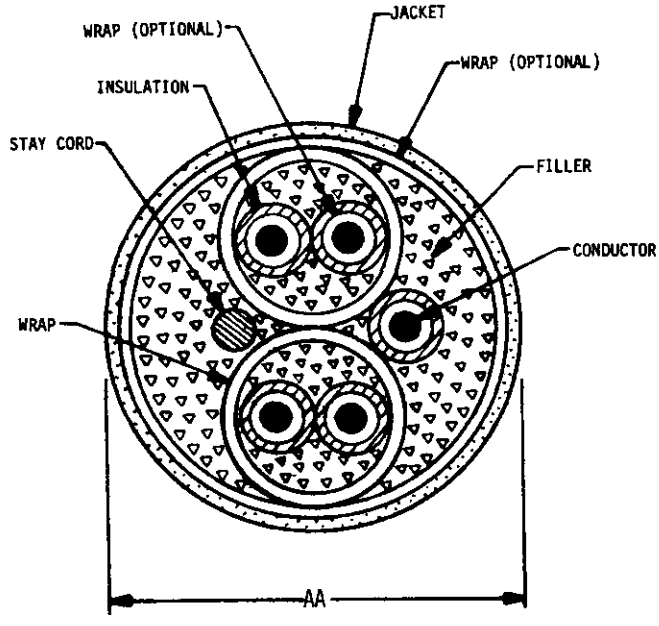


034-05-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

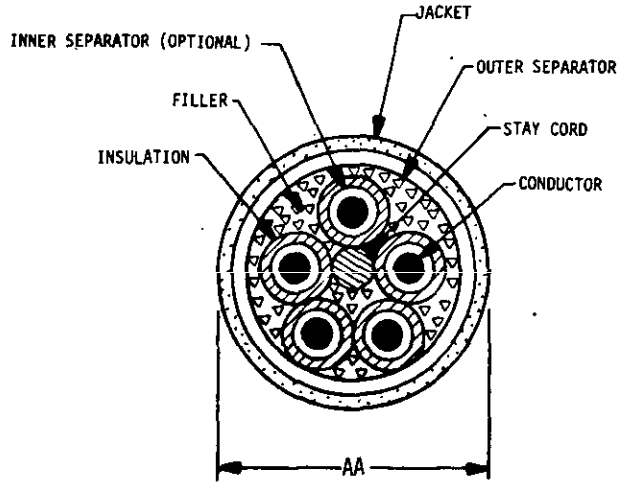


034-05-3

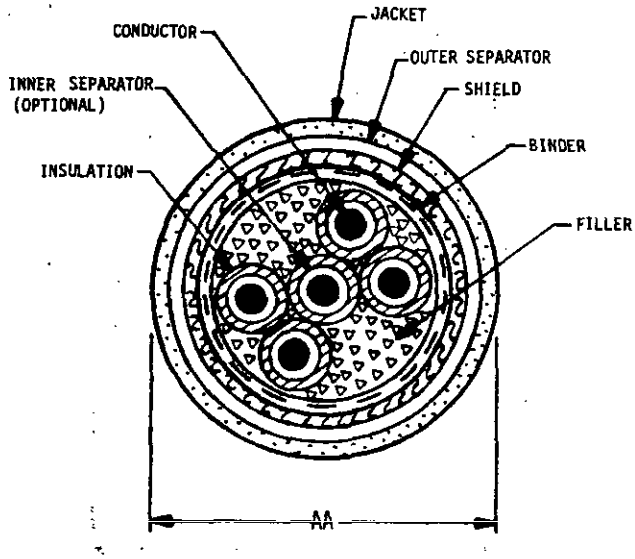


034-05-4


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

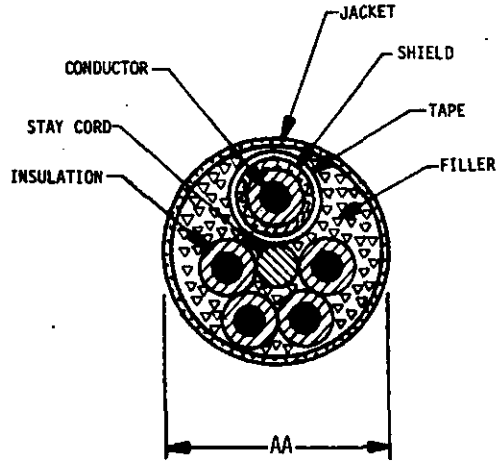

034-05-5

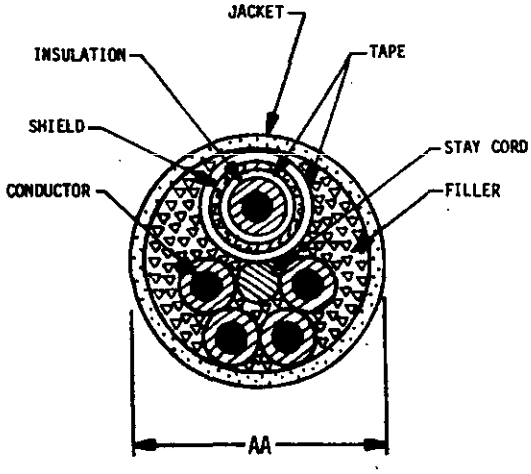


034-05-6

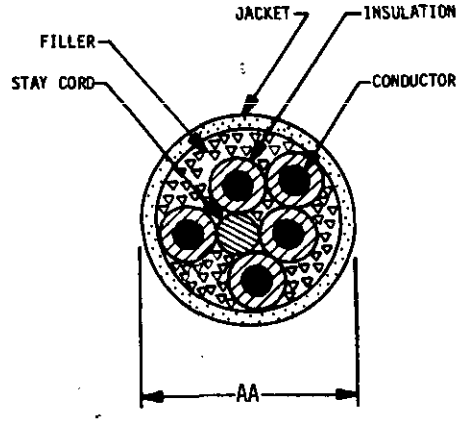


034-05-7


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

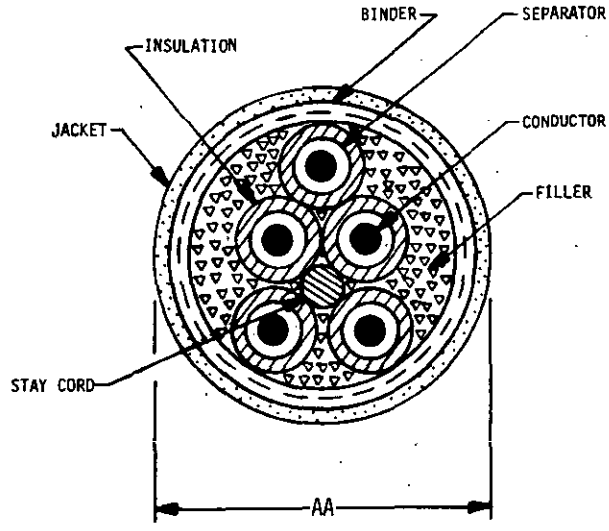

034-05-8

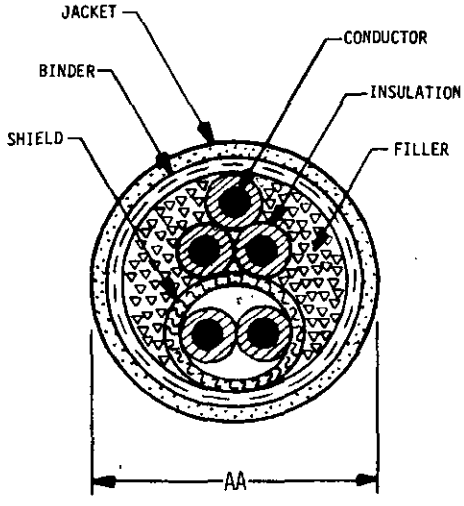


034-05-9

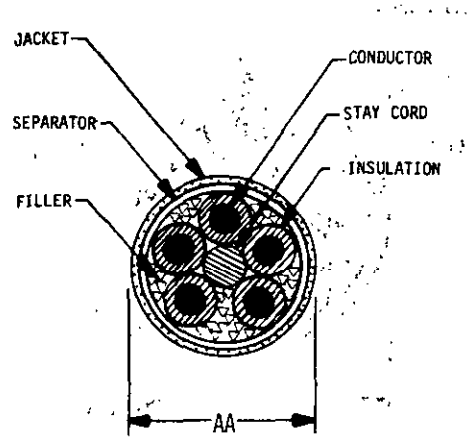


034-05-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

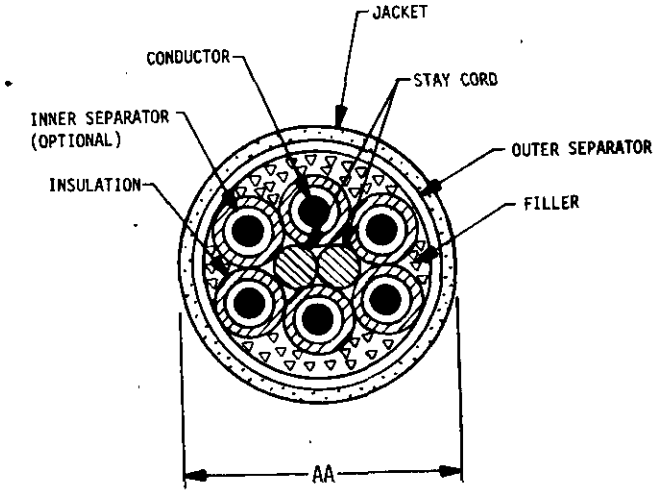


034-06-1

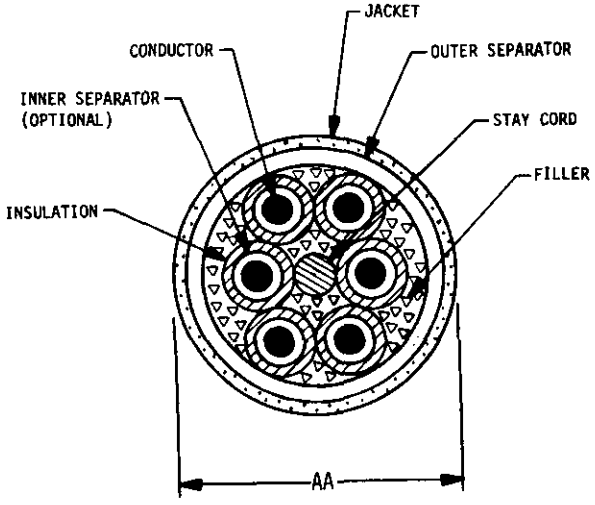


034-06-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

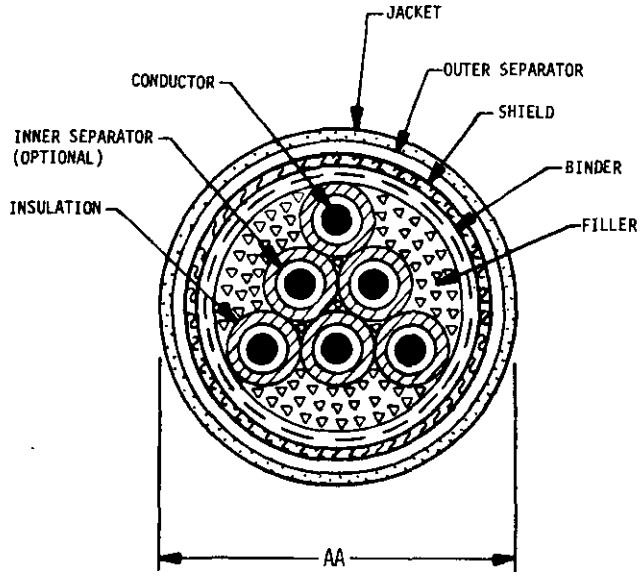


034-06-3

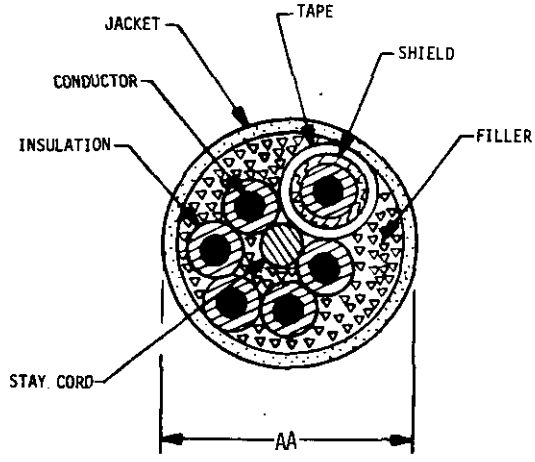


034-06-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

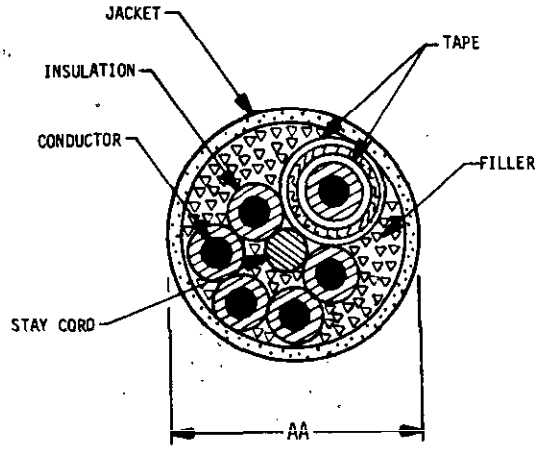


Ø34-Ø6-5

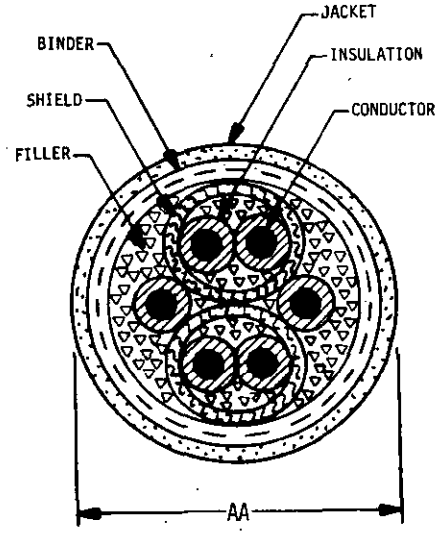


Ø34-Ø6-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

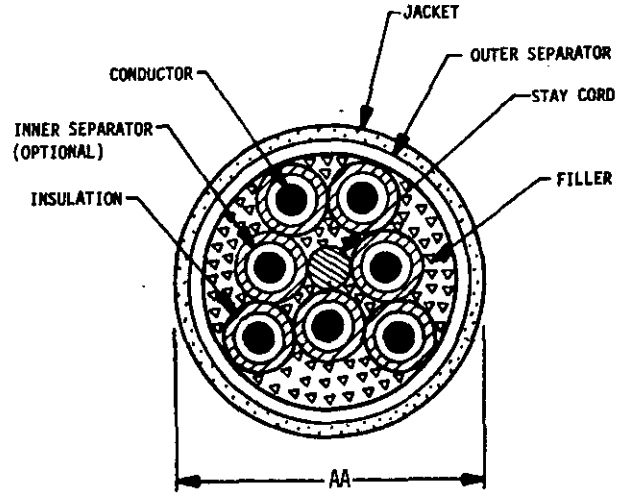


034-07-1

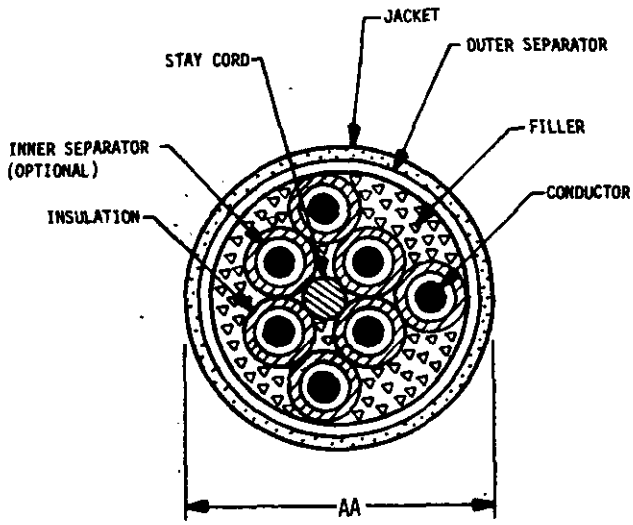


034-07-2


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

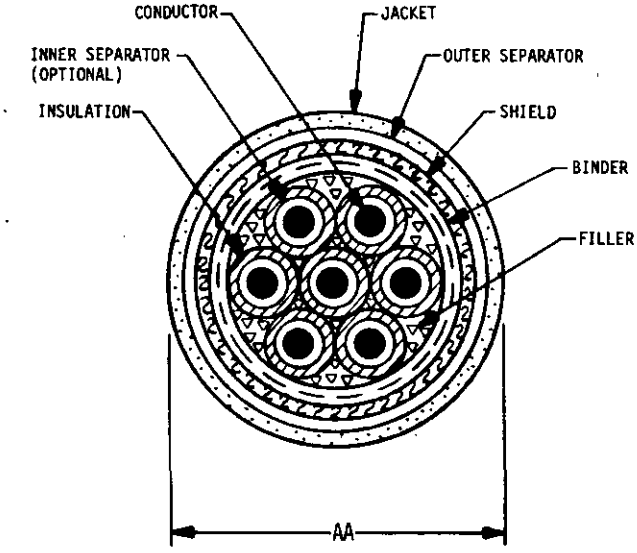

034-07-3

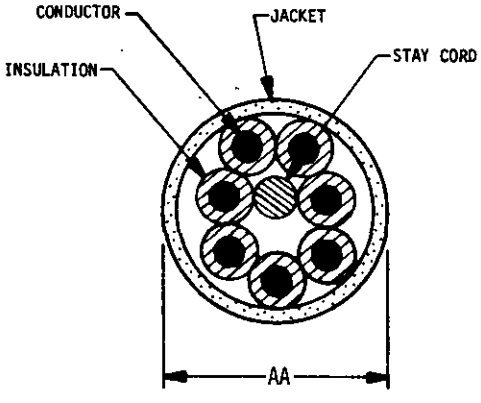


034-07-4

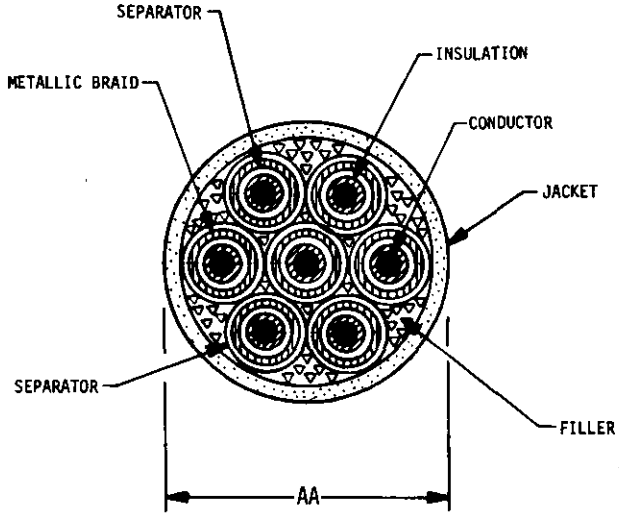


034-07-5


Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

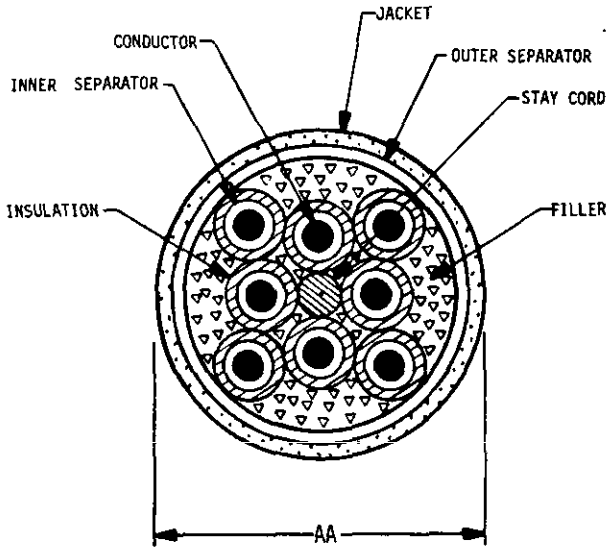

034-08-1

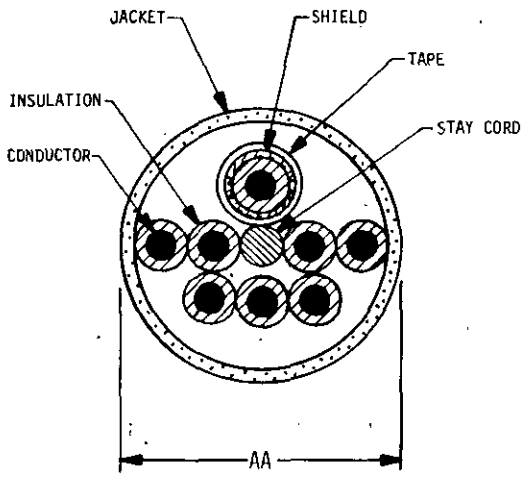


034-08-2

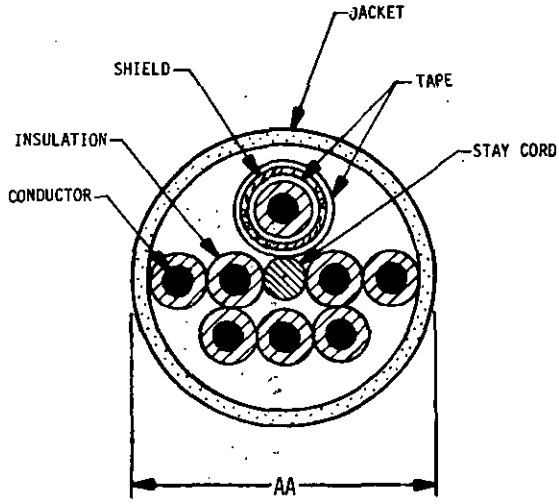


034-08-3


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

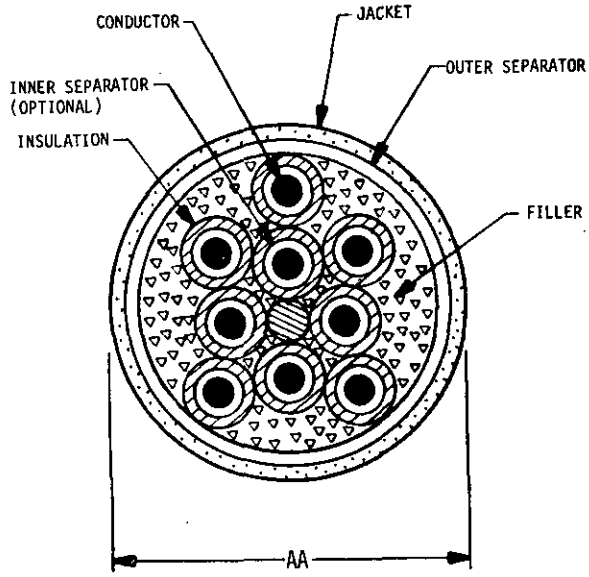

034-09-1

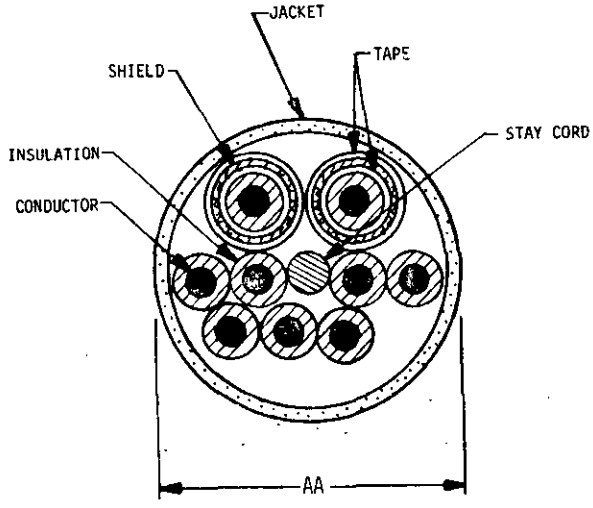


034-09-3

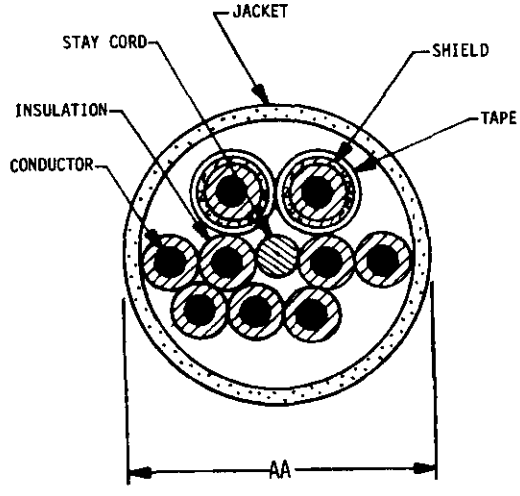

034-09-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

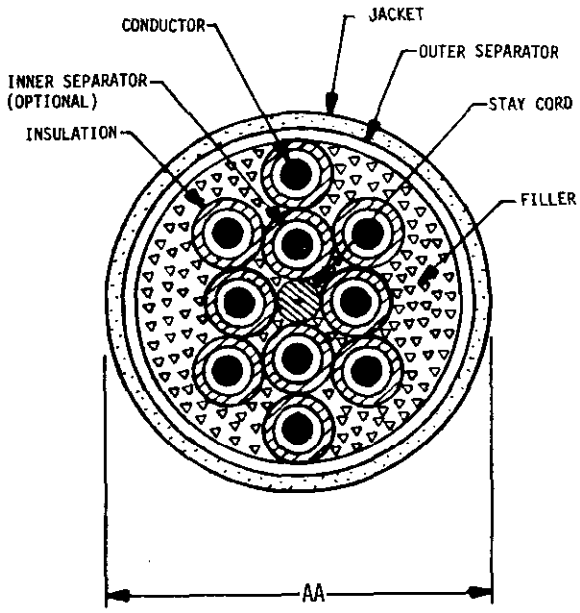

034-10-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	12	1717	22	1804	28	1949	46
0102	12	1718	22	1806	30	1950	62
0103	12	1724	22	1808	30	1951	62
0104	12	1730	22	1810	30	1952	62
0105	12	1732	22	1812	30	1954	62
0107	14	1736	24	1814	30	1955	62
0109	14	1738	24	1816	30	1956	62
0700	12	1740	24	1818	30	1957	62
0800	12	1742	24	1832	30	1958	62
1003	12	1744	24	1834	30	1960	62
1004	12	1746	24	1836	32	1962	62
1005	12	1748	24	1838	32	1964	78
1006	12	1750	24	1840	32	1966	78
1008	12	1752	24	1842	32	1968	78
1009	16	1756	24	1844	32	1969	78
1391	68	1758	24	1845	32	1970	78
1395	68	1760	24	1846	32	1972	78
1396	66	1762	26	1848	32	1974	78
1397	68	1764	26	1850	32	1976	78
1400	66	1766	26	1851	32	1982	70
1562	16	1768	26	1852	34	1986	70
1566	16	1770	26	1854	34	1988	70
1570	16	1772	26	1856	34	1992	68
1686	20	1774	26	1860	34	1994	68
1688	20	1776	26	1862	34	1996	68
1689	20	1777	26	1864	34	2012	40
1690	20	1778	26	1866	34	2014	40
1691	20	1779	26	1868	34	2016	40
1692	20	1780	28	1926	52	2018	40
1693	20	1782	28	1928	52	2020	40
1694	22	1784	28	1934	50	2022	40
1696	22	1786	28	1936	50	2036	48
1697	20	1788	28	1938	46	2038	48
1698	20	1790	28	1940	46	2040	48
1699	20	1792	28	1942	46	2041	48
1700	20	1794	26	1943	46	2042	48
1712	22	1796	28	1944	46	2043	48
1714	22	1798	28	1945	46	2044	46
1715	22	1800	28	1946	44	2045	48
1716	22	1802	28	1948	44	2046	48

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2049	40	2150	38	2270	66	2382	74
2050	40	2152	38	2272	66	2384	74
2052	40	2154	38	2274	66	2386	74
2054	40	2156	38	2275	66	2414	76
2056	38	2158	38	2276	66	2416	76
2060	42	2160	38	2278	64	2420	76
2062	42	2162	38	2280	64	2422	76
2064	42	2164	38	2281	66	2426	44
2066	42	2168	36	2282	64	2427	44
2068	42	2170	36	2284	66	2428	44
2070	42	2172	38	2286	66	2429	44
2072	42	2173	38	2306	60	2430	44
2078	42	2174	76	2308	60	2432	44
2080	42	2176	76	2310	60	2434	44
2082	42	2178	78	2312	60	2436	50
2086	42	2180	78	2314	60	2438	50
2088	42	2182	78	2316	60	2439	50
2090	72	2188	78	2320	58	2440	50
2091	72	2192	76	2322	58	2441	50
2092	72	2194	76	2324	58	2442	50
2094	72	2198	54	2328	70	2444	48
2096	74	2199	54	2330	70	2446	50
2098	74	2200	54	2332	70	2478	34
2100	74	2201	54	2334	70	2480	82
2102	72	2202	54	2336	70	2482	82
2104	72	2203	54	2338	70	2484	68
2108	72	2204	54	2340	70	2486	68
2110	72	2205	56	2358	52	2487	68
2114	60	2206	54	2360	52	2488	66
2116	60	2207	54	2362	52	2490	66
2118	60	2208	54	2364	52	4754	58
2122	60	2210	54	2366	52	4755	58
2124	60	2236	56	2368	52	4756	58
2134	64	2237	56	2370	52	4760	58
2136	64	2238	56	2374	74	4761	58
2138	64	2239	56	2376	74	4762	58
2140	64	2240	56	2378	74	4985	68
2142	62	2241	56	2379	74	4986	68
2144	64	2242	56	2380	74	5068	16
2148	38	2244	56	2381	74	5069	16

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
6369	12						
6372	80						
6870	80						
6873	12						
6874	14						
6941	14						
6942	14						
6991	82						
6992	82						
6993	82						
6994	82						
6995	82						
7001	80						
7002	80						
7003	80						
7004	80						
7005	80						
7059	36						
7347	36						
7348	36						
7400	36						
7572	16						
7573	16						
7574	16						
7576	18						
7577	18						
7579	18						
7629	80						

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Additional Part Marking	82
Additional Requirements	80
Aperture Cards Required	14
Applicable Documents	82
Base Document	12
Bending Endurance	36
Breaking Load	38
Capacitance	40
City, State, Zip	12
Cold Bending	42
Company Name/Command	12
Conductor Elongation	44
Conductor Resistance	44
Conductor Strand Resistance	46
Conductor Tensile Strength	48
Configuration	16
Continuity	50
Contract Number/Office Sumbol	12
Control	12
Cord Retractility	52
Date	12
Design and Construction	20
Electrical Ratings	16
End Seals	82
Finishes	20
Flammability	54
Flexibility	56
Format	12
Fungus	58
Government Design Activity FSCM	12
High Temperature Retraction	58
Illustrations	18
Insulation Elongation	60
Insulation Resistance	62
Insulation Tensile Strength	62
Low Temperature Extension and Retraction	64

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

INDEX (CONT)

	Page
Materials	18
Moisture Resistance	66
Mutual Inductance	68
Nomenclature	82
Notes	82
Packaging	82
Part Marking	80
Part Number	14
Part Number Cross-Reference	82
Phone Number	12
Quality Assurance Provisions	82
Requester FSCM	12
Requester's Name	12
Retraction after Static Loading	70
Revision of AEDPS Document	14
Sea Water Resistance	72
Scope	14
Source Table	14
Street/Building	12
Superseded Document	82
System Application	12
Tabulated Characteristics	18
Temperature Rating	16
Tension Set	74
Tin Coating	76
Twisting Endurance	76
Units of Measure	14
Voltage Withstand	78
Weight	36
Workmanship	80

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-67A(MI), dated 15 June 1978 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-67A(MI), dated 15 June 1978 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
DoD-STD 35-67A

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.