DOD-STD-35-68A(MI)

2 February 1979

SUPERSEDING

Section 2

MIL-STD-35-68(MI)

7 January 1974

MILITARY STANDARD

CABLES, COAXIAL

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

FSC EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Cable, Coaxial
Automated Engineering
Document Preparation System

DOD-STD-35-36A(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-36A(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for coaxial cable.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	3
	2.1	Issues of documents	3
	2.2	Other publications	4
	3.	DEFINITIONS	5
	4.	GENERAL REQUIREMENTS	6
	4.1	Introduction	6
	4.2	Specification Requirement Sheet (SRS)	6
	4.3	Configuration	6
	4.3.1	Dimensions	6
	4.3.2	Illustrations	6
	4.4	Units of measure	6
	5.	DETAILED REQUIREMENTS	7
	5.1	Introduction	7
	5.2	MSE Formats	7
	5.3	Referenced documents	7
	5.4	Test matrix	7
	5.5	Tabulation	8
	5.6	Keyword Code Index (KCI) and Standard Paragraphs	11
	5.6.1	Interrelationship of Codes	11
	5.6.2	Automatic MSE Data	11
	5.6.3	DOD-STD-35 Tables	11

TABLES

Table	I.	Title Index	2
	II.	Test matrix	8
	III.	Tabulation candidates	9

APPENDICES

Appendix	A.	Illustrations	81
	B.	Characteristic Code Index	83
		Index	89

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for coaxial cable.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	
CABLE, RADIO FREQUENCY	Ø36ØØ3	MIL-C-17	FLEXIBLE AND SEMIRIGID
		MIL-C-15452	LEAD SHEATHED
		MIL-C-22931	SEMI-AIR DIELECTRIC
		MIL-C-23020	SUBMARINE USE
		MIL-C-23806	SEMIRIGID, FOAM DIELECTRIC
		MIL-C-24301	BUOYANT
		MIL-C-28726	BUOYANT
		MIL-C-28751	BUOYANT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-C-17	Cable, Radio Frequency, Flexible and Semirigid, General Specification For
MIL-C-22931	Cable, Radio Frequency, Semirigid, Coaxial, Semi-Air-Dielectric, General Specification For
MIL-C-23806	Cable, Radio Frequency, Coaxial, Semirigid, Foam Dielectric, General Specification

STANDARDS

FEDERAL

FED-STD-228	Cable and Wire, Insulated; Methods of Testing

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-104	Limit For Electrical Insulation Color
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following document forms a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTME380 Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, Pa. 19103.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to coaxial cable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for coaxial cable, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to coaxial cable.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to coaxial cable.

4.3.2 Illustrations. Illustrations applicable to coaxial cable are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Test matrix. A test matrix is supplied as a guide for selecting documents to specify tests (see table II). The test matrix presents documents most applicable for use to satisfy the statement "TEST PER (DOC DES)". Any document listed in the Title Index may be used to satisfy the statement. However, the selected document from the Title Index must contain the desired test. Government test method documents and approved industry standards such as ASTM test methods may also be used to satisfy the statement "TEST PER (DOC DES)".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE II TEST MATRIX.

TEST	CODE	DOCUMENT MIL-C-17	MIL-C-22931	MIL-C-23806
ATTENUATION	2328	X	X	X
BENDABILITY	2330	X	X	X
CAPACITANCE	2334	X	X	X
COLD BEND	2340	X	X	
CONTINUITY	2356	X	X	X
IMPEDANCE	1934	X	X	X
TEMPERATURE CYCLING	2476	X	X	X
VELOCITY OF PROPAGATION	2520		X	X
VOLTAGE STANDING WAVE RATIO/RETURN LOSS	2526	X	X	X

5.5 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table III provides codes for column headings which may be used for Coaxial Cable characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil - Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1562	MINIMUM IMPEDANCE (OHMS)	1563	NOMINAL IMPEDANCE (OHMS)	1564	MAXIMUM IMPEDANCE (OHMS)
1572	POWER (WATTS)	1578	MAXIMUM FREQUENCY (MEGAHZ)	1580	MAXIMUM FREQUENCY (GIGAHZ)
2302	MAXIMUM VOLTAGE (VOLTS DC)	2304	MAXIMUM VOLTAGE (VOLTS AC)	1787	MAXIMUM CONDUCTOR CAP (PICO-FARAD PER FOOT
1789	MAXIMUM CONDUCTOR CAP (PICO-FARAD PER METER)				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.6 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.6.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.6.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.6.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT.	0700
ONE SECTION DOCUMENT.	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil - Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6874	THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).
0107	
0108	0108. SCOPE. SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.
	PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.
	PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.
6941	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.
6942	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION	
CABLE (TYPE)	2300
ALTITUDE RATING	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5060
SEA LEVEL TO (METERS)	5061
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5062
SEA LEVEL TO (METERS)	5063
TEMPERATURE RATING	
MAXIMUM OPERATING (DEGREES CELSIUS)	5069
MAXIMUM NONOPERATING (DEGREES CELSIUS)	5071
MAXIMUM STORAGE (DEGREES CELSIUS)	7302
MINIMUM OPERATING (DEGREES CELSIUS)	5068
MINIMUM NONOPERATING (DEGREES CELSIUS)	5070
MINIMUM STORAGE (DEGREES CELSIUS)	7301

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CLASSIFICATION.
2300	THE CABLE TYPE SHALL BE 2300.
	ALTITUDE RATING.
5060	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5060 FEET.
5061	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5061 METERS.
5062	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5062 FEET.
5063	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5063 METERS.
5069	THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS.
5071	THE MAXIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5071 DEGREES CELSIUS.
7302	THE MAXIMUM STORAGE TEMPERATURE RATING SHALL BE 7302 DEGREES CELSIUS.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.
5070	THE MINIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5070 DEGREES CELSIUS.
7301	THE MINIMUM STORAGE TEMPERATURE RATING SHALL BE 7301 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELECTRICAL RATINGS	
IMPEDANCE	
MINIMUM (OHMS)	1562
MAXIMUM (OHMS)	1564
NOMINAL (OHMS)	1563
MAXIMUM POWER (WATTS)	1572
MAXIMUM FREQUENCY (SELECT ONE)	
(MEGAHERTZ)	1578
(GIGAHERTZ)	1580
MAXIMUM VOLTAGE	
(VOLTS DC)	2302
(VOLTS RMS)	2304
WORKING VOLTAGE	
(VOLTS DC)	2556
(VOLTS RMS)	2558
MECHANICAL RATINGS	
MINIMUM BEND RADIUS (SELECT ONE)	
(INCHES)	1582
(MILLIMETERS)	1584

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ELECTRICAL RATINGS.
1562	THE CHARACTERISTIC IMPEDANCE SHALL BE NOT LESS THAN 1562 OHM(S).
1564	THE CHARACTERISTIC IMPEDANCE SHALL BE NOT GREATER THAN 1564 OHM(S).
1563	THE CHARACTERISTIC IMPEDANCE SHALL BE 1563 OHM(S).
1572	THE MAXIMUM POWER RATING SHALL BE 1572 WATT(S).
1578	THE MAXIMUM FREQUENCY RATING SHALL BE 1578 MEGAHERTZ.
1580	THE MAXIMUM FREQUENCY RATING SHALL BE 1580 GIGAHERTZ.
2302	THE MAXIMUM VOLTAGE RATING SHALL BE 2302 VOLT(S) DC.
2304	THE MAXIMUM VOLTAGE RATING SHALL BE 2304 VOLT(S) RMS.
2556	THE WORKING VOLTAGE SHALL BE 2556 VOLT(S) DC.
2558	THE WORKING VOLTAGE SHALL BE 2558 VOLT(S) RMS.
	MECHANICAL RATINGS.
1582	THE BEND RADIUS SHALL BE NOT LESS THAN 1582 INCH(S).
1584	THE BEND RADIUS SHALL BE NOT LESS THAN 1584 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MECHANICAL RATINGS (CONT)	
MAXIMUM PULLING TENSION (SELECT ONE)	
(POUNDS)	1586
(KILOGRAMS)	1588
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
DIMENSION TABLE, (SEE TABLE III, DOD-STD-35)	
*UNITS (SELECT ONE)	
U.S.	
INCHES.	7572
SI	
MILLIMETERS.	7577
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950
NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.	
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1586	THE PULLING TENSION SHALL BE NOT GREATER THAN 1586 POUND(S).
1588	THE PULLING TENSION SHALL BE NOT GREATER THAN 1588 KILOGRAM(S).
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONFIGURATION TABLE	

NOTE: BECAUSE OF ITS LENGTH, THE CONFIGURATION TABLE IS DIVIDED INTO THREE PAGES. THE CODES FOR THE FIRST COLUMN (ELEMENT) SHOULD BE ENTERED ON THE SRS ONLY ONCE. THE INFORMATION WILL AUTOMATICALLY REPEAT FOR EACH CONTINUATION PAGE OF THE TABLE IN THE MSE.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

CONFIGURATION TABLE. THE CONFIGURATION SHALL BE AS SPECIFIED IN THE CONFIGURATION TABLE.

CONFIGURATION TABLE

ELEMENT	DESCRIPTION	DIAMETER		THICKNESS	
		MIN	MAX	MIN	MAX
3400	3401	3402	3403	3404	3405
3420	3421	3422	3423	3424	3425
3440	3441	3442	3443	3444	3445
3460	3461	3462	3463	3464	3465
3480	3481	3482	3483	3484	3485
3500	3501	3502	3503	3504	3505
3520	3521	3522	3523	3524	3525
3540	3541	3542	3543	3544	3545
3560	3561	3562	3563	3564	3565
3580	3581	3582	3583	3584	3585
3600	3601	3602	3603	3604	3605
3620	3621	3622	3623	3624	3625
3640	3641	3642	3643	3644	3645
3660	3661	3662	3663	3664	3665
3680	3681	3682	3683	3684	3685

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONFIGURATION TABLE (CONT)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

CONFIGURATION TABLE (CONT)

ELEMENT	CIR AREA	SIZE (AWG)	STRAND (NO./ AWG)	STRAND CIR AREA	NO. OF CARRIERS	COVERAGE (PERCENT MINIMUM)	LAY (RH OR LH)
	3417	3418	3415	3419	3406	3407	3408
	3437	3438	3435	3439	3426	3427	3428
	3457	3458	3455	3459	3446	3447	3448
	3477	3478	3475	3479	3466	3467	3468
	3497	3498	3495	3499	3486	3487	3488
	3517	3518	3515	3519	3506	3507	3508
	3537	3538	3535	3539	3526	3527	3528
	3557	3558	3555	3559	3546	3547	3548
	3577	3578	3575	3579	3566	3567	3568
	3597	3598	3595	3599	3586	3587	3588
	3617	3618	3615	3619	3606	3607	3608
	3637	3638	3635	3639	3626	3627	3628
	3657	3658	3655	3659	3646	3647	3648
	3677	3678	3675	3679	3666	3667	3668
	3697	3698	3695	3699	3686	3687	3688

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONFIGURATION TABLE (CONT)	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE STANDARD PARAGRAPH

CONFIGURATION TABLE (CONT)

ELEMENT	LAY LENGTH	NO. OF LAYERS	LAP (PCT)	PICKS	BRAID ANGLE (DEG)	WIDTH MIN	WIDTH MAX
	3416	3410	3411	3412	3409	3413	3414
	3436	3430	3431	3432	3429	3433	3434
	3456	3450	3451	3452	3449	3453	3454
	3476	3470	3471	3472	3469	3473	3474
	3496	3490	3491	3492	3489	3493	3494
	3516	3510	3511	3512	3509	3513	3514
	3536	3530	3531	3532	3529	3533	3534
	3556	3550	3551	3552	3549	3553	3554
	3576	3570	3571	3572	3569	3573	3574
	3596	3590	3591	3592	3589	3593	3594
	3616	3610	3611	3612	3609	3613	3614
	3636	3630	3631	3632	3629	3633	3634
	3656	3650	3651	3652	3649	3653	3654
	3676	3670	3671	3672	3669	3673	3674
	3696	3690	3691	3692	3689	3693	3694

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE IX IS USED.	
METALS	
DISSIMILAR METALS.	7580

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
	FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
7580	METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION	
DIELECTRIC CORE (TYPE)	2540
INTERLAYER (TYPE)	2542
JACKET (TYPE)	2544
COLOR	
PER MIL-STD-104 (NAME)	2306
*CLASS (NUMBER)	2308
IDENTIFICATION (SELECT ONE)	
COLOR CODE (DOC DES)	2314
SURFACE MARKING.	2315
MARKING (SPECIFY)	2316
INTERVAL (SELECT ONE)	
(INCHES)	2318
(MILLIMETERS)	2320
CHARACTER HEIGHT (SELECT ONE)	
(INCHES)	2322
(MILLIMETERS)	2324

Source: https://assist.dla.mil. Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	DESIGN AND CONSTRUCTION
2540	DIELECTRIC CORE. DIELECTRIC CORE TYPE 2540 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
2542	INTERLAYER. INTERLAYER TYPE 2542 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
2544	JACKET. JACKET TYPE 2544 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
2306	COLOR. THE OUTER COVERING COLOR SHALL BE 2306 IN ACCORDANCE WITH MIL-STD-104.
2308	THE COLOR CLASS SHALL BE 2308.
2314	IDENTIFICATION. THE IDENTIFICATION COLOR CODE SHALL BE IN ACCORDANCE WITH 2314.
2315	IDENTIFICATION. THE IDENTIFICATION SHALL BE BY SURFACE MARKING.
2316	THE IDENTIFICATION MARKING SHALL BE 2316.
2318	THE IDENTIFICATION MARKING INTERVAL SHALL BE 2318 INCH(S).
2320	THE IDENTIFICATION MARKING INTERVAL SHALL BE 2320 MILLIMETER(S).
2322	THE IDENTIFICATION MARKING CHARACTER HEIGHT SHALL BE 2322 INCH(S).
2324	THE IDENTIFICATION MARKING CHARACTER HEIGHT SHALL BE 2324 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
WEIGHT (SELECT ONE)	
U.S.	
MAXIMUM PER 1000 FEET (POUNDS)	7347
MINIMUM PER 1000 FEET (POUNDS)	7059
SI	
MAXIMUM PER KILOMETER (KILOGRAMS)	7407
MINIMUM PER KILOMETER (KILOGRAMS)	7403
AGING STABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2052
NO EVIDENCE OF CRACKS, FLAWS, OR DAMAGE.	2054
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2042
PER MIL-C-17.	2326
TEST TEMPERATURE (DEGREES CELSIUS)	2046

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7347	MAXIMUM WEIGHT PER 1000 FEET. THE WEIGHT PER 1000 FEET SHALL BE NOT GREATER THAN 7347 POUND(S).
7059	MINIMUM WEIGHT PER 1000 FEET. THE WEIGHT PER 1000 FEET SHALL BE NOT LESS THAN 7059 POUND(S).
7407	MAXIMUM WEIGHT PER KILOMETER. THE WEIGHT PER KILOMETER SHALL BE NOT GREATER THAN 7407 KILOGRAM(S).
7403	MINIMUM WEIGHT PER KILOMETER. THE WEIGHT PER KILOMETER SHALL BE NOT LESS THAN 7403 KILOGRAM(S).
2052	AGING STABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2052.
2054	AGING STABILITY. THERE SHALL BE NO EVIDENCE OF CRACKS, FLAWS, OR OTHER DAMAGE.
2042	AGING STABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2042.
2326	AGING STABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-17.
2046	THE TEST TEMPERATURE SHALL BE 2046 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ATTENUATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1802
ATTENUATION TABLE	
NOTE: MAXIMUM ATTENUATION (SELECT ONE) U.S. (FEET) OR SI (METERS). FREQUENCY (SELECT ONE) (MEGAHERTZ) OR (GIGAHERTZ).	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1792
PER DOCUMENT (DOC DES)	2328
BENDABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2072

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE | STANDARD PARAGRAPH

1802 ATTENUATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1802.

ATTENUATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE ATTENUATION TABLE.

ATTENUATION TABLE

MAXIMUM ATTENUATION PER 100 FEET (DECIBELS)	MAXIMUM ATTENUATION PER 100 METERS (DECIBELS)	FREQUENCY (MEGAHERTZ)	FREQUENCY (GIGAHERTZ)
3301	3331	3302	3303
3304	3332	3305	3306
3307	3333	3308	3309
3310	3334	3311	3312
3313	3335	3314	3315
3316	3336	3317	3318
3319	3337	3320	3321
3322	3338	3323	3324
3325	3339	3326	3327
3328	3340	3329	3330

1792 ATTENUATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1792.

2328 ATTENUATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2328.

2072 BENDABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2072.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
BENDABILITY (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF CRACKS, FLAWS, OR DAMAGE.	2074
MAXIMUM (VSWR)	2076
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2061
PER DOCUMENT (DOC DES)	2330
CAPACITANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1782
AS FOLLOWS:	2332
MAXIMUM (PICOFARADS)	1784
NOMINAL (PICOFARADS)	1785
TEST METHODS (SELECT ONE)	
MAXIMUM CONDUCTOR CAPACITANCE (SELECT ONE)	
(PICOFARADS PER FOOT)	1787
(PICOFARADS PER METER)	1789
PER BASE DOCUMENT EXCEPT ____	1772

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2074	BENDABILITY. THERE SHALL BE NO EVIDENCE OF CRACKS, FLAWS, OR OTHER DAMAGE.
2076	THE VOLTAGE STANDING WAVE RATIO SHALL BE NOT GREATER THAN 2076.
2061	BENDABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2061.
2330	BENDABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2330.
1782	CAPACITANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1782.
2332	CAPACITANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1784	THE CAPACITANCE SHALL BE NOT GREATER THAN 1784 PICOFARAD(S).
1785	THE CAPACITANCE SHALL BE 1785 PICOFARAD(S) NOMINAL.
1787	THE CONDUCTOR CAPACITANCE SHALL BE NOT GREATER THAN 1787 PICOFARAD(S) PER FOOT.
1789	THE CONDUCTOR CAPACITANCE SHALL BE NOT GREATER THAN 1789 PICOFARAD(S) PER METER.
1772	CAPACITANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1772.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CAPACITANCE (CONT)	
TEST METHODS (CONT)	
PER DOCUMENT (DOC DES)	2334
TEST FREQUENCY (KILOHERTZ)	1776
CAPACITANCE STABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1842
MAXIMUM CAPACITANCE VARIATION (PERCENT)	1844
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1832
PER MIL-C-17.	2336
CAPACITANCE UNBALANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1862
MAXIMUM UNBALANCE (PERCENT)	1864
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1852
PER MIL-C-17.	2338

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2334	CAPACITANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2334.
1776	THE TEST FREQUENCY SHALL BE 1776 KILOHERTZ.
1842	CAPACITANCE STABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1842.
1844	CAPACITANCE STABILITY. THE CAPACITANCE VARIATION SHALL BE NOT GREATER THAN 1844 PERCENT.
1832	CAPACITANCE STABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1832.
2336	CAPACITANCE STABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-17.
1862	CAPACITANCE UNBALANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1862.
1864	CAPACITANCE UNBALANCE. THE CAPACITANCE UNBALANCE SHALL BE NOT GREATER THAN 1864 PERCENT.
1852	CAPACITANCE UNBALANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1852.
2338	CAPACITANCE UNBALANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-17.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
COLD BEND	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2012
NO EVIDENCE OF CRACKS, FLAWS OR DAMAGE.	2014
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2002
PER DOCUMENT (DOC DES)	2340
TEST TEMPERATURE (DEGREES CELSIUS)	2006
TEST DURATION (HOURS)	2005
CONDUCTOR TENSILE STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2342
AS FOLLOWS:	2560
MINIMUM TENSILE STRENGTH OF INNER CONDUCTOR (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2344
(KILOPASCALS)	2346

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2012	COLD BEND. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2012.
2014	COLD BEND. THERE SHALL BE NO EVIDENCE OF CRACKS, FLAWS, OR OTHER DAMAGE.
2002	COLD BEND. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2002.
2340	COLD BEND. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2340.
2006	THE TEST TEMPERATURE SHALL BE 2006 DEGREES CELSIUS.
2005	THE TEST DURATION SHALL BE 2005 HOUR(S).
2342	CONDUCTOR TENSILE STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2342.
2560	CONDUCTOR TENSILE STRENGTH. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2344	THE TENSILE STRENGTH OF THE INNER CONDUCTOR SHALL BE NOT LESS THAN 2344 POUND(S) PER SQUARE INCH.
2346	THE TENSILE STRENGTH OF THE INNER CONDUCTOR SHALL BE NOT LESS THAN 2346 KILOPASCAL(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONDUCTOR TENSILE STRENGTH (CONT)	
AS FOLLOWS: (CONT)	
MINIMUM TENSILE STRENGTH OF OUTER CONDUCTOR (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2546
(KILOPASCALS)	2548
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2348
PER FED-STD-228	2562
*METHOD	
INNER CONDUCTOR (SELECT ONE)	
3211, SOFT.	2350
3212, HARD.	2352
OUTER CONDUCTOR (SELECT ONE)	
3211, SOFT.	2550
3212, HARD.	2552
NUMBER OF SPECIMENS (NUMBER)	2554

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2546	THE TENSILE STRENGTH OF THE OUTER CONDUCTOR SHALL BE NOT LESS THAN 2546 POUND(S) PER SQUARE INCH.
2548	THE TENSILE STRENGTH OF THE OUTER CONDUCTOR SHALL BE NOT LESS THAN 2548 KILOPASCAL(S).
2348	CONDUCTOR TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2348.
2562	CONDUCTOR TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH FED-STD-228.
2350	THE TEST METHOD FOR INNER DONDUCTOR TESTING SHALL BE 3211.
2352	THE TEST METHOD FOR INNER CONDUCTOR TESTING SHALL BE 3212.
2550	THE TEST METHOD FOR OUTER CONDUCTOR TESTING SHALL BE 3211.
2552	THE TEST METHOD FOR OUTER CONDUCTOR TESTING SHALL BE 3212.
2554	THE NUMBER OF SPECIMENS SHALL BE 2554.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTAMINATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2292
MAXIMUM CHANGE IN Q (NUMBER)	2294
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2282
PER MIL-C-17.	2284
CONTINUITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1699
CONDUCTORS SHALL HAVE CONTINUITY.	1700
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1693
PER DOCUMENT (DOC DES)	2356
TEST VOLTAGE (VOLTS)	1694

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2292	CONTAMINATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2292.
2294	CONTAMINATION. THE CHANGE IN Q SHALL BE NOT GREATER THAN 2294.
2282	CONTAMINATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2282.
2284	CONTAMINATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-17.
1699	CONTINUITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1699.
1700	CONTINUITY. THE CONDUCTORS SHALL HAVE CONTINUITY.
1693	CONTINUITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1693.
2356	CONTINUITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2356.
1694	THE TEST VOLTAGE SHALL BE 1694 VOLT(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CORONA	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1762
MINIMUM EXTINCTION VOLTAGE (VOLTS AC)	1764
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1752
PER MIL-C-17.	2358
TEST VOLTAGE (VOLTS AC)	1754
SIMULATED ALTITUDE (SELECT ONE)	
(FEET)	2360
(METERS)	2362
DIMENSIONAL STABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2092
AS FOLLOWS:	2364
MAXIMUM PROTRUSION OF INNER CONDUCTOR FROM CORE (SELECT ONE)	
(INCHES)	2094

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1762	CORONA. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1762.
1764	CORONA. THE EXTINCTION VOLTAGE SHALL BE NOT LESS THAN 1764 VOLT(S) AC.
1752	CORONA. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1752.
2358	CORONA. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-17.
1754	THE TEST VOLTAGE SHALL BE 1754 VOLT(S) AC.
2360	THE SIMULATED ALTITUDE SHALL BE 2360 FEET.
2362	THE SIMULATED ALTITUDE SHALL BE 2362 METER(S).
2092	DIMENSIONAL STABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2092.
2364	DIMENSIONAL STABILITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2094	THE PROTRUSION OF THE INNER CONDUCTOR FROM THE CORE SHALL BE NOT GREATER THAN 2094 INCH(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIMENSIONAL STABILITY (CONT)	
MAXIMUM PROTRUSION OF INNER CONDUCTOR FROM CORE (CONT)	
(MILLIMETERS)	2366
MAXIMUM PROTRUSION OF INNER CONDUCTOR FROM JACKET (SELECT ONE)	
(INCHES)	2096
(MILLIMETERS)	2368
MAXIMUM CONTRACTION OF INNER CONDUCTOR (SELECT ONE)	
(INCHES)	2370
(MILLIMETERS)	2372
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2082
PER MIL-C-17.	2374
TEST TEMPERATURE (DEGREES CELSIUS)	2084

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2366	THE PROTRUSION OF THE INNER CONDUCTOR FROM THE CORE SHALL BE NOT GREATER THAN 2366 MILLIMETER(S).
2096	THE PROTRUSION OF THE INNER CONDUCTOR FROM THE JACKET SHALL BE NOT GREATER THAN 2096 INCH(S).
2368	THE PROTRUSION OF THE INNER CONDUCTOR FROM THE JACKET SHALL BE NOT GREATER THAN 2368 MILLIMETER(S).
2370	THE CONTRACTION OF THE INNER CONDUCTOR SHALL BE NOT GREATER THAN 2370 INCH(S).
2372	THE CONTRACTION OF THE INNER CONDUCTOR SHALL BE NOT GREATER THAN 2372 MILLIMETER(S).
2082	DIMENSIONAL STABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2082.
2374	DIMENSIONAL STABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-17.
2084	THE TEST TEMPERATURE SHALL BE 2084 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLAMMABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2376
AS FOLLOWS:	2378
MAXIMUM FLAME DISTANCE (SELECT ONE)	
(INCHES)	2380
(MILLIMETERS)	2382
MAXIMUM FLAME DURATION (SECONDS)	2384
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2386
PER FED-STD-228	2564
*METHOD (SELECT ONE)	
5211.	2390
5221.	2392
5231.	2394
HEATING DURATION (SECONDS)	2396
NUMBER OF SPECIMENS (NUMBER)	2398

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2376	FLAMMABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2376.
2378	FLAMMABILITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2380	THE FLAME DISTANCE SHALL BE NOT GREATER THAN 2380 INCH(S).
2382	THE FLAME DISTANCE SHALL BE NOT GREATER THAN 2382 MILLIMETER(S).
2384	THE FLAME DURATION SHALL BE NOT GREATER THAN 2384 SECOND(S).
2386	FLAMMABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2386.
2564	FLAMMABILITY. TESTING SHALL BE IN ACCORDANCE WITH FED-STD-228.
2390	TEST METHOD 5211 SHALL APPLY.
2392	TEST METHOD 5221 SHALL APPLY.
2394	TEST METHOD 5231 SHALL APPLY.
2396	THE HEATING DURATION SHALL BE 2396 SECOND(S).
2398	THE NUMBER OF SPECIMENS SHALL BE 2398.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMPEDANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1942
AS FOLLOWS:	2400
IMPEDANCE	
MAXIMUM (OHMS)	1946
MINIMUM (OHMS)	1944
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1932
PER DOCUMENT (DOC DES)	1934
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1380
MINIMUM RESISTANCE (SELECT ONE)	
(MEGOHMS PER 1000 FEET)	2402
(MEGOHMS PER KILOMETER)	2404

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1942	IMPEDANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1942.
2400	IMPEDANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1946	THE IMPEDANCE SHALL BE NOT GREATER THAN 1946 OHM(S).
1944	THE IMPEDANCE SHALL BE NOT LESS THAN 1944 OHM(S).
1932	IMPEDANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1932.
1934	IMPEDANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1934.
1380	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.
2402	INSULATION RESISTANCE. THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 2402 MEGOHM(S) PER 1000 FEET.
2404	INSULATION RESISTANCE. THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 2404 MEGOHM(S) PER KILOMETER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1371
PER FED-STD-228, METHOD 6031.	2406
TEST VOLTAGE (VOLTS DC)	2408
PERIOD AFTER CIRCUIT CLOSED (MINUTES)	2410
IMMERSION MEDIUM (NAME)	2412
TEMPERATURE (DEGREES CELSIUS)	2414
IMMERSION PERIOD (HOURS)	2416
MECHANICALLY INDUCED NOISE VOLTAGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2272
MAXIMUM NOISE (MICROVOLTS PEAK TO PEAK)	2276
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2260
PER MIL-C-17.	2418

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1371	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.
2406	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 6031 OF FED-STD-228.
2408	THE TEST VOLTAGE SHALL BE 2408 VOLT(S) DC.
2410	THE PERIOD AFTER THE CIRCUIT IS CLOSED SHALL BE 2410 MINUTE(S).
2412	THE IMMERSION MEDIUM SHALL BE 2412.
2414	THE TEST TEMPERATURE SHALL BE 2414 DEGREES CELSIUS.
2416	THE IMMERSION PERIOD SHALL BE 2416 HOUR(S).
2272	MECHANICALLY INDUCED NOISE VOLTAGE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2272.
2276	MECHANICALLY INDUCED NOISE VOLTAGE. THE NOISE SHALL BE NOT GREATER THAN 2276 MICROVOLT(S) PEAK TO PEAK.
2260	MECHANICALLY INDUCED NOISE VOLTAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2260.
2418	MECHANICALLY INDUCED NOISE VOLTAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WTIH MIL-C-17.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OUTER CONDUCTOR INTEGRITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2420
NO EVIDENCE OF CRACKS, FLAWS, OR DAMAGE.	2422
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2424
PER MIL-C-17.	2426
TEST TEMPERATURE (DEGREES CELSIUS)	2428
TEST DURATION (HOURS)	2430
PHASE STABILITY	
REQUIREMENTS (SELECT ONE).	
PER BASE DOCUMENT EXCEPT ____	2432
MAXIMUM COEFFICIENT OF CHANGE IN ELECTRICAL LENGTH (PARTS PER MILLION PER DEGREE CELSIUS)	2434
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2436

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2420	OUTER CONDUCTOR INTEGRITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2420.
2422	OUTER CONDUCTOR INTEGRITY. THERE SHALL BE NO EVIDENCE OF CRACKS, FLAWS, OR OTHER DAMAGE.
2424	OUTER CONDUCTOR INTEGRITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2424.
2426	OUTER CONDUCTOR INTEGRITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-17.
2428	THE TEST TEMPERATURE SHALL BE 2428 DEGREES CELSIUS.
2430	THE TEST DURATION SHALL BE 2430 HOUR(S).
2432	PHASE STABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2432.
2434	PHASE STABILITY. THE COEFFICIENT OF CHANGE IN ELECTRICAL LENGTH SHALL BE NOT GREATER THAN 2434 PART(S) PER MILLION PER DEGREE CELSIUS.
2436	PHASE STABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2436.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PHASE STABILITY (CONT)	
TEST METHODS (CONT)	
PER MIL-C-17.	2438
TEST FREQUENCY (MEGAHERTZ)	2440
TEST TEMPERATURES	
HIGH (DEGREES CELSIUS)	2442
*LOW (DEGREES CELSIUS)	2444
PRESSURE TIGHTNESS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2446
MAXIMUM PRESSURE DROP PER 24 HOURS (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2448
(PASCALS)	2449
TEST METHOD (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2450
PER MIL-C-22931.	2452

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2438	PHASE STABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-17.
2440	THE TEST FREQUENCY SHALL BE 2440 MEGAHERTZ.
2442	THE HIGH TEST TEMPERATURE SHALL BE 2442 DEGREES CELSIUS.
2444	THE LOW TEST TEMPERATURE SHALL BE 2444 DEGREES CELSIUS.
2446	PRESSURE TIGHTNESS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2446.
2448	PRESSURE TIGHTNESS. THE PRESSURE DROP SHALL BE NOT GREATER THAN 2448 POUND(S) PER SQUARE INCH IN A 24 HOUR PERIOD.
2449	PRESSURE TIGHTNESS. THE PRESSURE DROP SHALL BE NOT GREATER THAN 2449 PASCAL(S) IN A 24 HOUR PERIOD.
2450	PRESSURE TIGHTNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2450.
2452	PRESSURE TIGHTNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-22931.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PRESSURE TIGHTNESS (CONT)	
PER MIL-C-22931. (CONT)	
TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2454
(PASCALS)	2455
SHOCK, SPECIFIED PULSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1508
NO EVIDENCE OF PHYSICAL DAMAGE.	1509
NO DISCONTINUITY DURING TEST.	1471
REMAIN WITHIN SPECIFIED TOLERANCE.	4703
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1502
PER MIL-STD-202, METHOD 213.	1500
*TEST CONDITION (LETTER)	1504
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	4686
NORMAL MOUNTING MEANS.	4685
MOUNT PER DOCUMENT (DOC DES)	4684

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2454	THE TEST PRESSURE SHALL BE 2454 POUND(S) PER SQUARE INCH.
2455	THE TEST PRESSURE SHALL BE 2455 PASCAL(S).
1508	SHOCK, SPECIFIED PULSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1508.
1509	SHOCK, SPECIFIED PULSE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1471	THERE SHALL BE NO DISCONTINUITY DURING THE TEST.
4703	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1502	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1502.
1500	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 213 OF MIL-STD-202.
1504	TEST CONDITION LETTER 1504 SHALL APPLY.
4686	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4685	MOUNTING SHALL BE BY THE NORMAL METHOD.
4684	MOUNTING SHALL BE IN ACCORDANCE WITH 4684.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SPARK TEST	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1722
NO BREAKDOWN.	1724
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1712
PER FED-STD-228, METHOD 6211.	2456
TEST VOLTAGE (VOLTS AC)	1714
STRESS CRACK RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2458
NO EVIDENCE OF CRACKS, FLAWS, OR DAMAGE.	2460
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2462
PER MIL-C-17.	2464
TEST TEMPERATURE (DEGREES CELSIUS)	2466
TEST DURATION (HOURS)	2468

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1722	SPARK TEST. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1722.
1724	SPARK TEST. THERE SHALL BE NO ELECTRICAL BREAKDOWN.
1712	SPARK TEST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1712.
2456	SPARK TEST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 6211 OF FED-STD-228.
1714	THE TEST VOLTAGE SHALL BE 1714 VOLT(S) AC.
2458	STRESS CRACK RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2458.
2460	STRESS CRACK RESISTANCE. THERE SHALL BE NO EVIDENCE OF CRACKS, FLAWS, OR OTHER DAMAGE.
2462	STRESS CRACK RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2462.
2464	STRESS CRACK RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-17.
2466	THE TEST TEMPERATURE SHALL BE 2466 DEGREES CELSIUS.
2468	THE TEST DURATION SHALL BE 2468 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE CYCLING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2470
NO EVIDENCE OF DAMAGE OR SEPARATION.	2472
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2474
PER DOCUMENT (DOC DES)	2476
MEASUREMENTS DURING TEMPERATURE CYCLING ____	2478
TEST TEMPERATURES TABLE.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE | STANDARD PARAGRAPH

2470 TEMPERATURE CYCLING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2470.

2472 TEMPERATURE CYCLING. THERE SHALL BE NO EVIDENCE OF DAMAGE OR INSULATION SEPARATION.

2474 TEMPERATURE CYCLING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2474.

2476 TEMPERATURE CYCLING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2476.

2478 MEASUREMENTS DURING TEMPERATURE CYCLING SHALL BE 2478.

TEST TEMPERATURES SHALL BE IN ACCORDANCE WITH THE TEST TEMPERATURES TABLE.

TEST TEMPERATURES TABLE

STEP	TEMPERATURE (DEGREES C)	DURATION (HOURS)
3201	3202	3203
3204	3205	3206
3207	3208	3209
3210	3211	3212
3213	3214	3215
3216	3217	3218

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THERMAL SHOCK	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2480
NO FLARING.	2482
MAXIMUM DIMENSIONAL CHANGES	
CORE (SELECT ONE)	
(INCHES)	2484
(MILLIMETERS)	2486
INSULATING LAYER (SELECT ONE)	
(INCHES)	2488
(MILLIMETERS)	2490
OUTER CONDUCTOR (SELECT ONE)	
(INCHES)	2496
(MILLIMETERS)	2498
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2500

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2480	THERMAL SHOCK. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2480.
2482	THERMAL SHOCK. THERE SHALL BE NO FLARING OF ANY LAYER.
2484	THE CHANGE IN DISTANCE FROM THE END OF THE CONDUCTOR TO THE CORE SHALL BE NOT GREATER THAN 2484 INCH(S).
2486	THE CHANGE IN DISTANCE FROM THE END OF THE CONDUCTOR TO THE CORE SHALL BE NOT GREATER THAN 2486 MILLIMETER(S).
2488	THE CHANGE IN DISTANCE FROM THE END OF THE CONDUCTOR TO THE INSULATING LAYER SHALL BE NOT GREATER THAN 2488 INCH(S).
2490	THE CHANGE IN DISTANCE FROM THE END OF THE CONDUCTOR TO THE INSULATING LAYER SHALL BE NOT GREATER THAN 2490 MILLIMETER(S).
2496	THE CHANGE IN DISTANCE FROM THE END OF THE CONDUCTOR TO THE OUTER JACKET SHALL BE NOT GREATER THAN 2496 INCH(S).
2498	THE CHANGE IN DISTANCE FROM THE END OF THE CONDUCTOR TO THE OUTER JACKET SHALL BE NOT GREATER THAN 2498 MILLIMETER(S).
2500	THERMAL SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THERMAL SHOCK (CONT)	
TEST METHODS (CONT)	
PER MIL-C-22931.	2502
TEST TEMPERATURES	
HIGH (DEGREES CELSIUS)	2504
LOW (DEGREES CELSIUS)	2506
TIME DELAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1822
MAXIMUM DELAY (SELECT ONE)	
(MICROSECONDS PER FOOT)	1824
(MICROSECONDS PER METER)	2508
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1812
PER MIL-C-17.	2510
TEST FREQUENCY (KILOHERTZ)	1818

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2502	THERMAL SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE MIL-C-22931.
2504	THE HIGH TEST TEMPERATURE SHALL BE 2504 DEGREES CELSIUS.
2506	THE LOW TEST TEMPERATURE SHALL BE 2506 DEGREES CELSIUS.
1822	TIME DELAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1822.
1824	TIME DELAY. THE TIME DELAY SHALL BE NOT GREATER THAN 1824 MICROSECOND(S) PER FOOT.
2508	TIME DELAY. THE TIME DELAY SHALL BE NOT GREATER THAN 2508 MICROSECOND(S) PER METER.
1812	TIME DELAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1812.
2510	TIME DELAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-17.
1818	THE TEST FREQUENCY SHALL BE 1818 KILOHERTZ.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TRANSMISSION UNBALANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1882
MAXIMUM UNBALANCE (PERCENT)	1884
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1872
PER MIL-C-17.	2512
TEST FREQUENCY (MEGAHERTZ)	1874
VELOCITY OF PROPAGATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2514
VELOCITY (PERCENT)	2516
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2518
PER DOCUMENT (DOC DES)	2520

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1882	TRANSMISSION UNBALANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1882.
1884	TRANSMISSION UNBALANCE. THE TRANSMISSION UNBALANCE SHALL BE NOT GREATER THAN 1884 PERCENT.
1872	TRANSMISSION UNBALANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1872.
2512	TRANSMISSION UNBALANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-17.
1874	THE TEST FREQUENCY SHALL BE 1874 MEGAHERTZ.
2514	VELOCITY OF PROPAGATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2514.
2516	VELOCITY OF PROPAGATION. THE VELOCITY SHALL BE 2516 PERCENT.
2518	VELOCITY OF PROPAGATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2518.
2520	VELOCITY OF PROPAGATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2520.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, HIGH FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1455
NO EVIDENCE OF PHYSICAL DAMAGE.	1456
NO DISCONTINUITY DURING TEST.	1473
REMAIN WITHIN SPECIFIED TOLERANCE.	1469
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1446
PER MIL-STD-202, METHOD 204.	1447
*TEST CONDITION (LETTER)	1448
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4709
NORMAL MOUNTING MEANS.	4708
MOUNT PER DOCUMENT (DOC DES)	4707
VOLTAGE STANDING WAVE RATIO/RETURN LOSS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1982
AS FOLLOWS:	2522

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1455	VIBRATION, HIGH FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1455.
1456	VIBRATION, HIGH FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1473	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1469	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1446	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1446.
1447	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 204 OF MIL-STD-202.
1448	TEST CONDITION LETTER 1448 SHALL APPLY.
4709	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4708	MOUNTING SHALL BE BY THE NORMAL METHOD.
4707	MOUNTING SHALL BE IN ACCORDANCE WITH 4707.
1982	VOLTAGE STANDING WAVE RATIO/RETURN LOSS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1982.
2522	VOLTAGE STANDING WAVE RATIO/RETURN LOSS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VOLTAGE STANDING WAVE RATIO/RETURN LOSS (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM (VSWR)	1984
MINIMUM RETURN LOSS (DECIBELS)	2524
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1972
PER DOCUMENT (DOC DES)	2526
TEST FREQUENCY (SELECT ONE)	
MINIMUM (MEGAHERTZ)	1974
*MAXIMUM (MEGAHERTZ)	1975
NOMINAL (MEGAHERTZ)	2528
VOLTAGE WITHSTAND	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1742
NO EVIDENCE OF DIELECTRIC BREAKDOWN.	1744
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1732
PER FED-STD-228, METHOD 6111.	2530

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1984	THE VOLTAGE STANDING WAVE RATIO SHALL BE NOT GREATER THAN 1984.
2524	THE RETURN LOSS SHALL BE NOT LESS THAN 2524 DECIBEL(S).
1972	VOLTAGE STANDING WAVE RATIO/RETURN LOSS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1972.
2526	VOLTAGE STANDING WAVE RATIO/RETURN LOSS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2526.
1974 1975	THE TEST FREQUENCY SHALL BE FROM 1974 MEGAHERTZ TO 1975 MEGAHERTZ.
2528	THE TEST FREQUENCY SHALL BE 2528 MEGAHERTZ.
1742	VOLTAGE WITHSTAND. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1742.
1744	VOLTAGE WITHSTAND. THERE SHALL BE NO EVIDENCE OF DIELECTRIC BREAKDOWN.
1732	VOLTAGE WITHSTAND. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1732.
2530	VOLTAGE WITHSTAND. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 6111 OF FED-STD-228.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VOLTAGE WITHSTAND (CONT)	
PER FED-STD-228, METHOD 6111. (CONT)	
TEST VOLTAGE (SELECT ONE)	
(VOLTS AC)	1734
(VOLTS DC)	2532
TEST DURATION (MINUTES)	2534
VOLTAGE APPLICATION PERIOD (MINUTES)	2536
TEST DRY.	2538
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1734	THE TEST VOLTAGE SHALL BE 1734 VOLT(S) AC.
2532	THE TEST VOLTAGE SHALL BE 2532 VOLT(S) DC.
2534	THE TEST DURATION SHALL BE 2534 MINUTE(S).
2536	THE VOLTAGE APPLICATION PERIOD SHALL BE 2536 MINUTE(S).
2538	THE TEST SHALL BE PERFORMED DRY.
	MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDITIONAL REQUIREMENTS
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(D) 7005.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-130.	7629
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI


(Project EDS-A276)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.


APPENDIX A

ILLUSTRATIONS


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

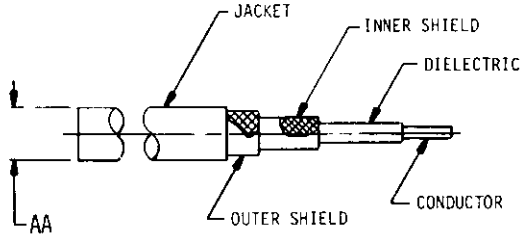

036-04-1

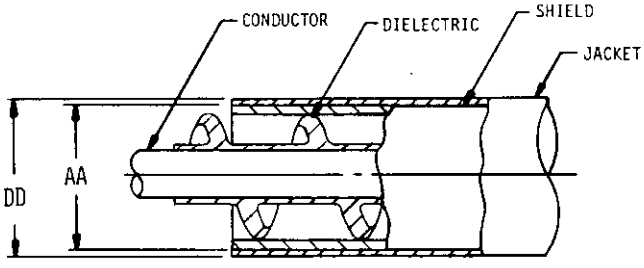

036-04-2

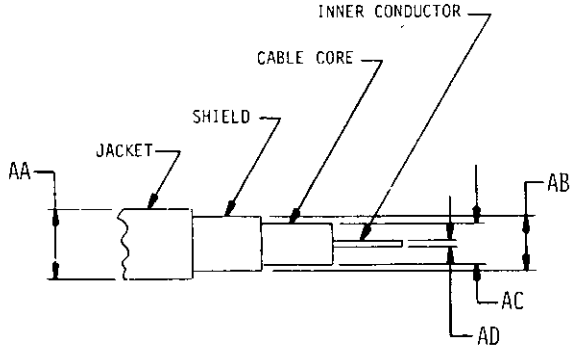

036-04-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	12	1693	44	1944	52	2318	30
0102	12	1694	44	1946	52	2320	30
0103	12	1699	44	1972	74	2322	30
0104	12	1700	44	1974	74	2324	30
0105	12	1712	62	1975	74	2326	32
0107	14	1714	62	1982	72	2328	34
0108	14	1722	62	1984	74	2330	36
0700	12	1724	62	2102	40	2332	36
0800	12	1732	74	2005	40	2334	36
1003	12	1734	76	2006	40	2336	36
1004	12	1742	74	2012	40	2338	36
1005	12	1744	74	2014	40	2340	40
1006	12	1752	46	2042	32	2342	40
1008	12	1754	46	2046	32	2344	40
1009	20	1762	46	2052	32	2346	40
1371	54	1764	46	2054	32	2348	42
1380	52	1772	36	2061	36	2350	42
1446	72	1776	36	2072	34	2352	42
1447	72	1782	36	2074	36	2356	44
1448	72	1784	36	2076	36	2358	46
1455	72	1785	36	2082	48	2360	46
1456	72	1792	34	2084	48	2362	46
1469	72	1802	34	2092	46	2364	46
1471	60	1812	68	2094	46	2366	48
1473	72	1818	68	2096	48	2368	48
1500	60	1822	68	2260	54	2370	48
1502	60	1824	68	2272	54	2372	48
1504	60	1832	36	2276	54	2374	48
1508	60	1842	36	2282	44	2376	50
1509	60	1844	36	2284	44	2378	50
1562	18	1852	36	2292	44	2380	50
1563	18	1862	36	2294	44	2382	50
1564	18	1864	36	2300	16	2384	50
1572	18	1872	70	2302	18	2386	50
1578	18	1874	70	2304	18	2390	50
1580	18	1882	70	2306	30	2392	50
1582	18	1884	70	2308	30	2394	50
1584	18	1932	52	2314	30	2396	50
1586	20	1934	52	2315	30	2398	50
1588	20	1942	52	2316	30	2400	52

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2402	52	2478	64	2562	42	3321	35
2404	52	2480	66	2564	50	3322	35
2406	54	2482	66	3201	65	3323	35
2408	54	2484	66	3202	65	3324	35
2410	54	2486	66	3203	65	3325	35
2412	54	2488	66	3204	65	3326	35
2414	54	2490	66	3205	65	3327	35
2416	54	2496	66	3206	65	3328	35
2418	54	2498	66	3207	65	3329	35
2420	56	2500	66	3208	65	3330	35
2422	56	2502	68	3209	65	3331	35
2424	56	2504	68	3210	65	3332	35
2426	56	2506	68	3211	65	3333	35
2428	56	2508	68	3212	65	3334	35
2430	56	2510	68	3213	65	3335	35
2432	56	2512	70	3214	65	3336	35
2434	56	2514	70	3215	65	3337	35
2436	56	2516	70	3216	65	3338	35
2438	58	2518	70	3217	65	3339	35
2440	58	2520	70	3218	65	3340	35
2442	58	2522	72	3301	35	3400	23
2444	58	2524	74	3302	35	3401	23
2446	58	2526	74	3303	35	3402	23
2448	58	2528	74	3304	35	3403	23
2449	58	2530	74	3305	35	3404	23
2450	58	2532	76	3306	35	3405	23
2452	58	2534	76	3307	35	3406	25
2454	60	2536	76	3308	35	3407	25
2455	60	2538	76	3309	35	3408	25
2456	62	2540	30	3310	35	3409	27
2458	62	2542	30	3311	35	3410	27
2460	62	2544	30	3312	35	3411	27
2462	62	2546	42	3313	35	3412	27
2464	62	2548	42	3314	35	3413	27
2466	62	2550	42	3315	35	3414	27
2468	62	2552	42	3316	35	3415	25
2470	64	2554	42	3317	35	3416	27
2472	64	2556	18	3318	35	3417	25
2474	64	2558	18	3319	35	3418	25
2476	64	2560	40	3320	35	3419	25

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3420	23	3460	23	3500	23	3540	23
3421	23	3461	23	3501	23	3541	23
3422	23	3462	23	3502	23	3542	23
3423	23	3463	23	3503	23	3543	23
3424	23	3464	23	3504	23	3544	23
3425	23	3465	23	3505	23	3545	23
3426	25	3466	25	3506	25	3546	25
3427	25	3467	25	3507	25	3547	25
3428	25	3468	25	3508	25	3548	25
3429	27	3469	27	3509	27	3549	27
3430	27	3470	27	3510	27	3550	27
3431	27	3471	27	3511	27	3551	27
3432	27	3472	27	3512	27	3552	27
3433	27	3473	27	3513	27	3553	27
3434	27	3474	27	3514	27	3554	27
3435	25	3475	25	3515	25	3555	25
3436	27	3476	27	3516	27	3556	27
3437	25	3477	25	3517	25	3557	25
3438	25	3478	25	3518	25	3558	25
3439	25	3479	25	3519	25	3559	25
3440	23	3480	23	3520	23	3560	23
3441	23	3481	23	3521	23	3561	23
3442	23	3482	23	3522	23	3562	23
3443	23	3483	23	3523	23	3563	23
3444	23	3484	23	3524	23	3564	23
3445	23	3485	23	3525	23	3565	23
3446	25	3486	25	3526	25	3566	25
3447	25	3487	25	3527	25	3567	25
3448	25	3488	25	3528	25	3568	25
3449	27	3489	27	3529	27	3569	27
3450	27	3490	27	3530	27	3570	27
3451	27	3491	27	3531	27	3571	27
3452	27	3492	27	3532	27	3572	27
3453	27	3493	27	3533	27	3573	27
3454	27	3494	27	3534	27	3574	27
3455	25	3495	25	3535	25	3575	25
3456	27	3496	27	3536	27	3576	27
3457	25	3497	25	3537	25	3577	25
3458	25	3498	25	3538	25	3578	25
3459	25	3499	25	3539	25	3579	25

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3580	23	3620	23	3660	23	4684	60
3581	23	3621	23	3661	23	4685	60
3582	23	3622	23	3662	23	4686	60
3583	23	3623	23	3663	23	4703	60
3584	23	3624	23	3664	23	4707	72
3585	23	3625	23	3665	23	4708	72
3586	25	3626	25	3666	25	4709	72
3587	25	3627	25	3667	25	4950	20
3588	25	3628	25	3668	25	5060	16
3589	27	3629	27	3669	27	5061	16
3590	27	3630	27	3670	27	5062	16
3591	27	3631	27	3671	27	5063	16
3592	27	3632	27	3672	27	5069	16
3593	27	3633	27	3673	27	5070	16
3594	27	3634	27	3674	27	5071	16
3595	25	3635	25	3675	25	5368	16
3596	27	3636	27	3676	27	6369	12
3597	25	3637	25	3677	25	6372	78
3598	25	3638	25	3678	25	6870	76
3599	25	3639	25	3679	25	6873	12
3600	23	3640	23	3680	23	6874	14
3601	23	3641	23	3681	23	6941	14
3602	23	3642	23	3682	23	6942	14
3603	23	3643	23	3683	23	6991	78
3604	23	3644	23	3684	23	6992	78
3605	23	3645	23	3685	23	6993	78
3606	25	3646	25	3686	25	6994	78
3607	25	3647	25	3687	25	6995	78
3608	25	3648	25	3688	25	7001	76
3609	27	3649	27	3689	27	7002	76
3610	27	3650	27	3690	27	7003	76
3611	27	3651	27	3691	27	7004	76
3612	27	3652	27	3692	27	7005	76
3613	27	3653	27	3693	27	7059	32
3614	27	3654	27	3694	27	7301	16
3615	25	3655	25	3695	25	7302	16
3616	27	3656	27	3696	27	7347	32
3617	25	3657	25	3697	25	7403	32
3618	25	3658	25	3698	25	7407	32
3619	25	3659	25	3699	25	7572	20

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
7577	20						
7580	28						
7629	78						

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Additional Part Marking	78
Additional Requirements	76
Aging Stability	32
Altitude Rating	16
Aperture Cards Required	14
Applicable Documents	78
Attenuation	34
Base Document	12
Bendability	34
Capacitance	36
Capacitance Stability	38
Capacitance Unbalance	38
City, State, Zip	12
Classification	16
Cold Bend	40
Color	30
Company Name/Command	12
Conductor Tensile Strength	40
Configuration	20
Configuration Table	22
Contamination	44
Continuity	44
Contract Number/Office Symbol	12
Control, Source	12
Control, Specification	14
Corona	46
Date	12
Design and Construction	30
Dielectric Core	30
Dimensional Stability	46
Electrical Ratings	18
Finishes	28
Flammability	50
Format	12
Government Design Activity FSCM	12
Identification	30
Illustrations	20

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Impedance	52
Insulation Resistance	52
Interlayer	30
Jacket	30
Materials	28
Mechanically Induced Noise Voltage	54
Mechanical Ratings	18
Metals	28
Mounting Hardware	76
Nomenclature	78
Notes	78
Outer Conductor Integrity	56
Packaging	78
Part Marking	78
Part Number	14
Part Number Cross-Reference	78
Phase Stability	56
Phone Number	12
Pressure Tightness	58
Quality Assurance Provisions	78
Requester FSCM	12
Requester's Name	12
Revision of AEDPS Document (Number)	14
Scope	14
Shock, Specified Pulse	60
Source Table	14
Spark Test	62
Street/Building	12
Stress Crack Resistance	62
Superseded Document	78
System Application	12
Tabulated Characteristics	20
Temperature Cycling	64
Temperature Rating	16
Thermal Shock	66

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Time Delay	68
Transmission Unbalance	70
Units of Measure	14, 20
Velocity of Propagation	70
Vibration, High Frequency	72
Voltage Standing Wave Ratio/Return Loss	72
Voltage Withstand	74
Weight	32
Workmanship	76

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-68A(MI), dated 2 Feb 1979 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

NOTE: NO PG. 92

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-68A(MI), dated 2 Feb 1979 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.