DOD-STD-35-69A(MI)

15 December 1978

SUPERSEDING

MIL-STD-35-69

31 January 1974

MILITARY STANDARD

CONNECTORS, ELECTRICAL, RECTANGULAR

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

FSC EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Connectors, Electrical, Rectangular
Automated Engineering
Document Preparation System

DOD-STD-35-69A(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-69A(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for rectangular connectors.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	5
	2.1	Issues of documents	5
	2.2	Other publications	6
	3.	DEFINITIONS	7
	4.	GENERAL REQUIREMENTS	9
	4.1	Introduction	9
	4.2	Specification Requirement Sheet (SRS)	9
	4.3	Configuration	9
	4.3.1	Dimensions	9
	4.3.2	Illustrations	9
	4.4	Units of measure	9
	5.	DETAILED REQUIREMENTS	11
	5.1	Introduction	11
	5.2	MSE Formats	11
	5.3	Referenced documents	11
	5.4	Tabulation	11
	5.5	Keyword Code Index (KCI) and Standard Paragraphs	13
	5.5.1	Interrelationship of Codes	13
	5.5.2	Automatic MSE Data	13
	5.5.3	DOD-STD-35 Tables	13

TABLES

Table	I.	Title Index	2
	II.	Tabulation candidates	12

APPENDICES

Appendix	A.	Illustrations	158
	B.	Characteristic Code Index	187
		Index	195

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for rectangular connectors.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
CONNECTOR, ELECTRICAL, RECTANGULAR	Ø72ØØ1	MIL-C-21617	POLARIZED SHELL SOLDER, ENVIRON AND NON-ENVIRON
		MIL-C-81659	POLARIZED SHELL CRIMP, ENVIRON
CONNECTOR, ELECTRICAL, RECTANGULAR, COAXIAL CONTACT	Ø72ØØ5	MIL-C-39029	CONTACTS
CONNECTOR, ELECTRICAL, RECTANGULAR, MINIATURE, RACK AND PANEL	Ø72ØØ2	MIL-C-24308	KEYSTONE SHELL CRIMP AND SOLDR NON-ENVIRONMTL
		MS18268	PLUG, SOLDR PIN
		MS18269	RCPT, SOLDR SKT
		MS18270	RCPT, CRIMP SKT
		MS18271	PLUG, CRIMP PIN
		MS18272	PLUG, HERM PIN
		MIL-C-28731	CENTER SCREW-LOCK, CRIMP, NON-ENVIRONMTL
		MIL-C-83733	POLARIZED SHELL ENVIRONMENTAL, CRIMP
CONNECTOR, ELECTRICAL, RECTANGULAR, MODULE AND BASE PLATE	Ø72ØØ4	MIL-C-28754	

Source: https://assist.dla.mil -- Downloaded: 2026Ø10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
CONNECTOR, ELECTRICAL, RECTANGULAR, RACK AND PANEL	072003	MIL-C-28748	SCREW POLARIZED CRIMP AND SOLDR NON-ENVIRONMTL
			SOLDER SIZE 22
		MS14012	4 PIN
		MS14013	4 SOCKET
		MS14014	7 PIN
		MS14015	7 SOCKET
		MS14016	14 PIN
		MS14017	14 SOCKET
		MS14018	20 PIN
		MS14019	20 SOCKET
		MS14020	26 PIN
		MS14021	26 SOCKET
		MS14022	34 PIN
		MS14023	34 SOCKET
		MS14024	44 PIN
		MS14025	44 SOCKET
		MS14026	50 PIN
		MS14027	50 SOCKET
			SOLDER SIZE 16
		MS18239	9 SOCKET
		MS18240	14 PIN
		MS18241	14 SOCKET
		MS18242	20 PIN
		MS18243	20 SOCKET
		MS18244	34 PIN
		MS18245	34 SOCKET
		MS18246	42 PIN
		MS18247	42 SOCKET
		MS18248	50 PIN
		MS18249	50 SOCKET
		MS18250	66 PIN
		MS18251	66 SOCKET
		MS18252	75 PIN
		MS18253	75 SOCKET
		MS18254	104 PIN
		MS18255	104 SOCKET

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
CONNECTOR, ELECTRICAL, RECTANGULAR, RACK AND PANEL	072003 (CONT)		SOLDER SIZE 20
		MS18256	9 SOCKET
		MS18257	9 PIN
		MS18258	42 PIN
		MS18259	75 SOCKET
		MS18260	42 SOCKET
		MS18261	75 PIN
		MS18262	104 SOCKET
		MS18263	104 PIN
		MS18264	9 PIN
		MS24003	7 SOCKET
		MS24004	7 PIN
		MS24009	14 SOCKET
		MS24010	14 PIN
		MS24013	20 SOCKET
		MS24014	20 PIN
		MS24019	26 SOCKET
		MS24020	26 PIN
		MS24021	34 SOCKET
		MS24022	34 PIN
		MS24025	50 SOCKET
		MS24026	50 PIN
		MIL-C-28804	POLARIZED SCREW LOCK, CRIMP AND SOLDER ENVIRON AND NON-ENVIRON
		MIL-C-85028	POLARIZED CTR JACKSCREW, CRIMP, ENVIRON

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-C-24308	Connectors, Electric, Rectangular, Miniature Polarized Shell, Rack and Panel, General Specification For

STANDARDS

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-810	Environmental Test Methods
MIL-STD-1285	Marking of Electric and Electronic Parts
MIL-STD-1344	Test Methods for Electrical Connectors
MIL-STD-1523	Age Control of Age-Sensitive Elastomeric Materials

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTME380 Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, Pa. 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Connectors, Rectangular.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for Connectors, Rectangular, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Connectors, Rectangular.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Connectors, Rectangular.

4.3.2 Illustrations. Illustrations applicable to Connectors, Rectangular are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table II provides codes for column headings which may be used for rectangular connector characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE II. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1568	CONTACT SPEC AND DETAIL SHT	1570	CONTACT MS NUMBER	1612	SHELL SIZE
1616	CONTACT RATING MAX AMPERES	1618	CONTACT RATING NOM AMPERES	1682	CONTACT TYPE
1686	WIRE SIZE (AWG)	1688	WIRE SIZE MILLIMTR	1690	TERMINATE TYPE
1790	SHELL DOC DES	1796	BACKSHELL PART NO.	1800	INSERT ARR ILL NO.
1802	CONTACT ILL NO.	1824	MATING CONNECTOR PART NO.	1916	SHELL PART NO.
2002	MAXIMUM CONTACT RESISTANCE	3401	CONTACT SIZE	7021	MAX WEIGHT OUNCES
7013	MAX WEIGHT POUNDS	7024	MAX WEIGHT KILOGRAMS	1678	NUMBER OF CONTACTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.5 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.5.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.5.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.5.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT	0700
ONE SECTION DOCUMENT	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6874 THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).

0107

0108 0108.

SCOPE.

SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.

PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.

PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

6941 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.

6942 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ALTITUDE RATING	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5060
SEA LEVEL TO (METERS)	5061
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5062
SEA LEVEL TO (METERS)	5063
TEMPERATURE RATING	
MAXIMUM OPERATING (DEGREES CELSIUS)	5069
MAXIMUM NONOPERATING (DEGREES CELSIUS)	5071
MAXIMUM STORAGE (DEGREES CELSIUS)	7302
MAXIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5054
MINIMUM OPERATING (DEGREES CELSIUS)	5068
MINIMUM NONOPERATING (DEGREES CELSIUS)	5070
MINIMUM STORAGE (DEGREES CELSIUS)	7301

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ALTITUDE RATING.
5060	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5060 FEET.
5061	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5061 METERS.
5062	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5062 FEET.
5063	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5063 METERS.
	TEMPERATURE RATING.
5069	THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS.
5071	THE MAXIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5071 DEGREES CELSIUS.
7302	THE MAXIMUM STORAGE TEMPERATURE RATING SHALL BE 7302 DEGREES CELSIUS.
5054	THE MAXIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5054 DEGREES CELSIUS.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.
5070	THE MINIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5070 DEGREES CELSIUS.
7301	THE MINIMUM STORAGE TEMPERATURE RATING SHALL BE 7301 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE RATING (CONT)	
MINIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5052
RATED WORKING VOLTAGE	
SEA LEVEL (SELECT ONE)	
(VOLTS AC)	1828
(VOLTS DC)	1829
(VOLTS DC OR RMS)	1830
ALTITUDE	
VOLTAGE (SELECT ONE)	
(VOLTS AC)	1831
(VOLTS DC)	1832
(VOLTS DC OR RMS)	1833
ALTITUDE (SELECT ONE)	
(FEET)	1834
(METERS)	1835

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
5052	THE MINIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5052 DEGREES CELSIUS.
	RATED WORKING VOLTAGE.
1828	THE MAXIMUM RATED WORKING VOLTAGE AT SEA LEVEL SHALL BE 1828 VOLTS AC.
1829	THE MAXIMUM RATED WORKING VOLTAGE AT SEA LEVEL SHALL BE 1829 VOLTS DC.
1830	THE MAXIMUM RATED WORKING VOLTAGE AT SEA LEVEL SHALL BE 1830 VOLTS DC OR RMS.
1831	THE MAXIMUM RATED WORKING VOLTAGE AT ALTITUDE SHALL BE 1831 VOLTS AC.
1832	THE MAXIMUM RATED WORKING VOLTAGE AT ALTITUDE SHALL BE 1832 VOLTS DC.
1833	THE MAXIMUM RATED WORKING VOLTAGE AT ALTITUDE SHALL BE 1833 VOLTS DC OR RMS.
1834	THE REDUCED RATED WORKING VOLTAGE ALTITUDE SHALL BE 1834 FEET.
1835	THE REDUCED RATED WORKING VOLTAGE ALTITUDE SHALL BE 1835 METERS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION	
IN ACCORDANCE WITH BASE DOCUMENT	
TYPE (DESIGNATION)	1602
SERIES (DESIGNATION)	1604
CLASS (DESIGNATION)	1606
POLARIZATION (DESIGNATION)	1607
STYLE (DESIGNATION)	1608
HARDWARE (DESIGNATION)	1609
JACKSCREW/JACKSOCKET CONFIGURATION (DESIGNATION)	1610
SHELL SIZE (DESIGNATION)	1612
SERVICE RATING (DESIGNATION)	1614
CONTACT DESIGNATOR (DESIGNATION)	1615
CONTACT CURRENT RATING	
MAXIMUM (AMPERES)	1616
NOMINAL (AMPERES)	1618

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CLASSIFICATION.
1602	TYPE 1602 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1604	SERIES 1604 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1606	CLASS 1606 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1607	POLARIZATION 1607 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1608	STYLE 1608 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1609	HARDWARE DESIGNATOR 1609 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1610	JACKSCREW/JACKSOCKET CONFIGURATION 1610 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1612	SHELL SIZE 1612 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1614	SERVICE RATING 1614 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1615	CONTACT DESIGNATOR 1615 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
	CONTACT CURRENT RATING.
1616	THE MAXIMUM CONTACT CURRENT RATING SHALL BE 1616 AMPERE(S).
1618	THE NOMINAL CONTACT CURRENT RATING SHALL BE 1618 AMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
*UNITS (SELECT ONE)	
U.S.	
INCHES.	7572
SI	
MILLIMETERS.	7577
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950
NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.	
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE IX IS USED.	
METALS	
DISSIMILAR METALS.	7580
DESIGN AND CONSTRUCTION	
INSERT	
ARRANGEMENT (SELECT ONE)	
(DOC DES)	1670
ILLUSTRATION (NUMBER)	1800
ONE-PIECE CONSTRUCTION.	1672

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

7580 METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.

DESIGN AND CONSTRUCTION.

INSERT.

1670 THE INSERT ARRANGEMENT FOR THE CONNECTOR SHALL BE IN ACCORDANCE WITH 1670.

1800 THE INSERT ARRANGEMENT FOR THE CONNECTOR SHALL BE IN ACCORDANCE WITH ILLUSTRATION 1800.

1672 THE INSERT SHALL BE OF ONE-PIECE CONSTRUCTION. SPLIT OR HOLLOW INSERTS GLUED OR BONDED TOGETHER SHALL NOT BE USED.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
INSERT (CONT)	
CLOSED ENTRY.	1674
CONTACT HOLE (DOC DES)	1676
CONTACTS (QUANTITY)	1678
INTERFACIAL SEAL REQUIRED.	1680
CONTACTS	
(TYPE) PIN, SOCKET, COAXIAL MALE, COAXIAL FEMALE	1682
SIZES (SEE CONTACT SIZES TABLE)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE | STANDARD PARAGRAPH

1674 THE INSERT SHALL BE CLOSED ENTRY DESIGN.

1676 THE CONTACT HOLE SHALL BE IN ACCORDANCE WITH 1676.

1678 THERE SHALL BE 1678 CONTACT POSITIONS.

1680 THE CONNECTOR INSERT SHALL CONTAIN AN INTERFACIAL SEAL.

1682 CONTACT TYPE. THE CONTACTS SHALL BE 1682.

CONTACT SIZES. CONTACT SIZES SHALL BE IN ACCORDANCE WITH THE CONTACT SIZES TABLE.

CONTACT SIZES TABLE

SIZE	CURRENT CAPACITY AMPS	CONTACT IDENTIFIERS
3401	3402	3403
3404	3405	3406
3407	3408	3409
3410	3411	3412
3413	3414	3415
3416	3417	3418

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
CONTACTS (CONT)	
CONFIGURATION (SELECT ONE)	
(SPECIFICATION) INCLUDE DETAIL SHEET IF APPLICABLE	1568
(MS NUMBER)	1570
(ILLUSTRATION NUMBER)	1802
(PART NUMBER)	1572
*(VENDOR FSCM)	1571
SUPPLY WITHOUT CONTACTS.	1684
WIRE SIZE (SELECT ONE)	
AWG (NUMBER)	1686
DIAMETER (MILLIMETERS)	1688
TERMINATION	
CRIMP, SOLDER, WRAP POST (TYPE)	1690
IDENTIFICATION (SELECT ONE)	
ALPHABETICAL.	1581
NUMERICAL.	1582
ALPHABETICAL OR NUMERICAL.	1586

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CONTACT CONFIGURATION.
1568	THE CONTACT CONFIGURATION SHALL BE IN ACCORDANCE WITH 1568.
1570	THE CONTACT CONFIGURATION SHALL BE IN ACCORDANCE WITH MS NUMBER 1570.
1802	THE CONTACT CONFIGURATION SHALL BE IN ACCORDANCE WITH ILLUSTRATION 1802.
1572 1571	CONTACT PART NUMBER(S) 1572 FROM FSCM 1571 SHALL APPLY.
1684	CONNECTORS SHALL BE SUPPLIED WITHOUT CONTACTS.
1686	CONTACTS SHALL ACCOMMODATE AWG SIZE 1686 WIRE.
1688	CONTACTS SHALL ACCOMMODATE 1688 MILLIMETER DIAMETER WIRE.
	CONTACT TERMINATION.
1690	THE CONTACT TERMINATION SHALL BE 1690 TYPE.
	CONTACT IDENTIFICATION.
1581	ALPHABETICAL CHARACTERS SHALL BE USED TO IDENTIFY THE CONTACT POSITIONS IN THE INSERT.
1582	NUMERICAL CHARACTERS SHALL BE USED TO IDENTIFY THE CONTACT POSITIONS IN THE INSERT.
1586	ALPHABETICAL OR NUMERICAL CHARACTERS SHALL BE USED TO IDENTIFY THE CONTACT POSITIONS IN THE INSERT.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
CONTACTS (CONT)	
INSERTION (SELECT ONE)	
FRONT.	1852
REAR.	1854
REMOVAL (SELECT ONE)	
FRONT.	1858
REAR.	1860
INSERTION AND REMOVAL TOOL(S) SUPPLIED.	1862
TOOLS	
INSERTION TOOL (PART NUMBER)	1904
EXTRACTION TOOL (PART NUMBER)	1906
CRIMP TOOL (PART NUMBER)	1910
POLARIZATION	
AS FOLLOWS:	
POLARIZATION KEY.	1590
SHELL SHAPE.	1591
BOSSES.	1592

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CONTACT INSERTION AND REMOVAL.
1852	CONTACT INSERTION SHALL BE FROM THE FRONT OF THE INSERT.
1854	CONTACT INSERTION SHALL BE FROM THE REAR OF THE INSERT.
1858	CONTACT REMOVAL SHALL BE FROM THE FRONT OF THE INSERT.
1860	CONTACT REMOVAL SHALL BE FROM THE REAR OF THE INSERT.
1862	CONTACT INSERTION AND REMOVAL TOOL(S) SHALL BE SUPPLIED WITH EACH CONNECTOR.
	INSERTION AND REMOVAL TOOLS.
1904	THE CONTACT INSERTION TOOL PART NUMBER(S) SHALL BE 1904.
1906	THE CONTACT REMOVAL TOOL PART NUMBER(S) SHALL BE 1906.
1910	CRIMPING TOOL PART NUMBER(S) SHALL BE 1910.
	POLARIZATION. POLARIZATION OF THE CONNECTOR SHALL BE BY MEANS OF THE FOLLOWING:
1590	A POLARIZATION KEY.
1591	THE SHELL SHAPE.
1592	BOSSES.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
POLARIZATION (CONT)	
GUIDE PINS.	1593
GUIDE SOCKETS.	1594
JACKSCREWS.	1595
CENTER JACKSCREW.	1596
JACKSOCKETS.	1786
POLARIZATION ____	1788
SHELL	
(PART NUMBER)	1916
(DOC DES)	1790
CONTAIN FLOAT MOUNTING PROVISIONS.	1792
BACKSHELL ACCESSORIES	
(NAME)	1794
(PART NUMBER)	1796
(VENDOR FSCM)	1798
GROMMET (WIRE SEAL) (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1842

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1593	GUIDE PINS.
1594	GUIDE SOCKETS.
1595	JACKSCREWS.
1596	CENTER JACKSCREW.
1786	JACKSOCKETS.
1788	POLARIZATION SHALL BE 1788.
	SHELL.
1916	THE PROTECTIVE SHELL PART NUMBER(S) SHALL BE 1916.
1790	THE PROTECTIVE SHELL SHALL BE IN ACCORDANCE WITH 1790.
1792	SHELL SHALL CONTAIN FLOAT MOUNTING PROVISIONS.
1794	BACKSHELL ACCESSORIES. THE CONNECTOR SHALL INCLUDE 1794.
1796	THE PART NUMBER FOR THE ACCESSORY SHALL BE 1796.
1798	THE ACCESSORY VENDOR FSCM SHALL BE 1798.
1842	GROMMET (WIRE SEAL). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1842.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
GROMMET (WIRE SEAL) (CONT)	
AS FOLLOWS:	1806
MAXIMUM OUTSIDE DIAMETER (SELECT ONE)	
(INCH)	1844
(MILLIMETERS)	1810
MINIMUM OUTSIDE DIAMETER (SELECT ONE)	
(INCH)	1846
(MILLIMETERS)	1812
GROMMET SEALING PLUGS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1814
PER DOCUMENT (DOC DES)	1816
QUANTITY SUPPLIED (SELECT ONE)	
(PERCENT)	1818
NONE.	1820

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1806	GROMMET (WIRE SEAL). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1844	THE GROMMET SHALL BE DESIGNED TO ACCOMMODATE A WIRE SIZE NOT GREATER THAN 1844 INCH OUTSIDE DIAMETER.
1810	THE GROMMET SHALL BE DESIGNED TO ACCOMMODATE A WIRE SIZE NOT GREATER THAN 1810 MILLIMETER(S) OUTSIDE DIAMETER.
1846	THE GROMMET SHALL BE DESIGNED TO PROVIDE SEALING ON A WIRE SIZE NOT LESS THAN 1846 INCH OUTSIDE DIAMETER.
1812	THE GROMMET SHALL BE DESIGNED TO PROVIDE SEALING ON A WIRE SIZE NOT LESS THAN 1812 MILLIMETER(S) OUTSIDE DIAMETER.
1814	GROMMET SEALING PLUGS. GROMMET SEALING PLUGS SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1814.
1816	GROMMET SEALING PLUGS. GROMMET SEALING PLUGS SHALL BE IN ACCORDANCE WITH 1816.
1818	1818 PERCENT OF THE NUMBER OF CONTACTS, BUT NOT LESS THAN 1, SHALL BE INCLUDED IN THE UNIT PACKAGE.
1820	CONNECTORS MAY BE SUPPLIED WITHOUT GROMMET SEALING PLUGS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
LUBRICATION	
COMPONENT LUBRICATED (NAME)	1600
LUBRICANT (DOC DES)	1601
MATING CONNECTOR	
(DOC DES)	1822
(PART NUMBER)	1824
(VENDOR FSCM)	1826
ALTITUDE	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	6790
SEA LEVEL TO (METERS)	6791
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	6792
SEA LEVEL TO (METERS)	6793
TEMPERATURE	
MAXIMUM OPERATING (DEGREES CELSIUS)	6794

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1600	LUBRICATION. THE 1600 OF THE CONNECTOR SHALL BE LUBRICATED.
1601	LUBRICANT IN ACCORDANCE WITH 1601 SHALL BE USED.
	MATING CONNECTOR.
1822	THE MATING CONNECTOR SHALL BE IN ACCORDANCE WITH 1822.
1824	THE MATING CONNECTOR PART NUMBER SHALL BE 1824.
1826	THE MATING CONNECTOR VENDOR FSCM SHALL BE 1826.
6790	OPERATING ALTITUDE. THE OPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6790 FEET.
6791	OPERATING ALTITUDE. THE OPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6791 METERS.
6792	NONOPERATING ALTITUDE. THE NONOPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6792 FEET.
6793	NONOPERATING ALTITUDE. THE NONOPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6793 METERS.
6794	MAXIMUM OPERATING TEMPERATURE. THE OPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6794 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
TEMPERATURE (CONT)	
MAXIMUM NONOPERATING (DEGREES CELSIUS)	6795
MAXIMUM STORAGE (DEGREES CELSIUS)	6796
MAXIMUM AMBIENT OPERATING (DEGREES CELSIUS)	6798
MINIMUM OPERATING (DEGREES CELSIUS)	6799
MINIMUM STORAGE (DEGREES CELSIUS)	6801
MINIMUM AMBIENT OPERATING (DEGREES CELSIUS)	6803
WEIGHT	
MAXIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6795	MAXIMUM NONOPERATING TEMPERATURE. THE NONOPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6795 DEGREES CELSIUS.
6796	MAXIMUM STORAGE TEMPERATURE. THE STORAGE TEMPERATURE SHALL BE NOT GREATER THAN 6796 DEGREES CELSIUS.
6798	MAXIMUM AMBIENT OPERATING TEMPERATURE. THE AMBIENT OPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6798 DEGREES CELSIUS.
6799	MINIMUM OPERATING TEMPERATURE. THE OPERATING TEMPERATURE SHALL BE NOT LESS THAN 6799 DEGREES CELSIUS.
6801	MINIMUM STORAGE TEMPERATURE. THE STORAGE TEMPERATURE SHALL BE NOT LESS THAN 6801 DEGREES CELSIUS.
6803	MINIMUM AMBIENT OPERATING TEMPERATURE. THE AMBIENT OPERATING TEMPERATURE SHALL BE NOT LESS THAN 6803 DEGREES CELSIUS.
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7023	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).
7021	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6272
NO EVIDENCE OF PHYSICAL DAMAGE.	6273
NO UNINTENDED SEPARATION.	3120
MEET MATING AND UNMATING REQUIREMENTS.	3121
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY.	7345
MAXIMUM DISCONTINUITY (MILLISECONDS)	3122
MAXIMUM DISCONTINUITY (MICROSECONDS)	3123
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6250
PER MIL-STD-1344, METHOD 2011.	3131
*TEST CONDITION (LETTER)	3124

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6272	ACCELERATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6272.
6273	ACCELERATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
3120	THERE SHALL BE NO UNINTENDED SEPARATION OF MATED CONNECTORS.
3121	CONNECTOR SHALL REMAIN WITHIN SPECIFIED MATING AND UNMATING FORCE REQUIREMENTS.
7345	THERE SHALL BE NO ELECTRICAL DISCONTINUITY DURING THE TEST.
3122	THE DISCONTINUITY DURING TEST SHALL BE NOT GREATER THAN 3122 MILLISECOND(S).
3123	THE DISCONTINUITY DURING TEST SHALL BE NOT GREATER THAN 3123 MICROSECOND(S).
6250	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6250.
3131	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2011 OF MIL-STD-1344.
3124	TEST CONDITION LETTER 3124 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATION (CONT)	
PER MIL-STD-1344, METHOD 2011. (CONT)	
MOUNTING (SELECT ONE)	
MOUNT BY ANY SUITABLE METHOD.	6263
MOUNT BY NORMAL METHOD.	6264
MOUNT PER DOCUMENT (DOC DES)	6265
TEST SPECIMEN (SELECT ONE)	
MATED PLUG AND RECEPTACLE.	3125
UNMATED CONNECTOR.	3126
ALTITUDE IMMERSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3048
NO EVIDENCE OF DIELECTRIC BREAKDOWN.	3049
MAXIMUM LEAKAGE CURRENT (MILLIAMPERES)	3052
NO EVIDENCE OF SEAL DETERIORATION OR LEAKAGE.	3054
MINIMUM INSULATION RESISTANCE WHILE IMMERSED (MEGOHMS)	3050

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6263	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
6264	MOUNTING SHALL BE NORMAL METHOD.
6265	MOUNTING SHALL BE IN ACCORDANCE WITH 6265.
3125	TEST SPECIMEN SHALL CONSIST OF A MATED PLUG AND RECEPTACLE.
3126	TEST SPECIMEN SHALL BE AN UNMATED CONNECTOR.
3048	ALTITUDE IMMERSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3048.
3049	ALTITUDE IMMERSION. THERE SHALL BE NO EVIDENCE OF DIELECTRIC BREAKDOWN.
3052	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 3052 MILLIAMPERE(S).
3054	THE CONNECTOR SHALL SHOW NO EVIDENCE OF MOISTURE SEAL DETERIORATION OR LEAKAGE.
3050	THE INSULATION RESISTANCE WHILE IN THE SALT SOLUTION SHALL BE NOT LESS THAN 3050 MEGOHMS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ALTITUDE IMMERSION (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3030
PER MIL-STD-1344, METHOD 1004.	3031
MINIMUM DIELECTRIC WITHSTANDING VOLTAGE (VOLTS RMS)	3044
DURATION (SECONDS)	3033
ATTACHED ACCESSORIES (NAME)	3040
MINIMUM WIRE OUTSIDE DIMENSION (SELECT ONE)	
(INCH)	3036
(MILLIMETERS)	3037
(WIRE TYPE)	3034
WIRE ENDS (SELECT ONE)	
NOT SEALED.	3035
SEALED.	3039
SEALING PLUGS INSTALLED (PERCENT)	3042

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3030	ALTITUDE IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3030.
3031	ALTITUDE IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1004 OF MIL-STD-1344.
3044	THE DIELECTRIC WITHSTANDING VOLTAGE SHALL BE NOT LESS THAN 3044 VOLTS RMS.
3033	THE DURATION OF DIELECTRIC WITHSTANDING VOLTAGE APPLICATION SHALL BE NOT LESS THAN 3033 SECONDS.
3040	CONNECTOR ACCESSORY(S) TO BE ON CONNECTOR SPECIMEN DURING TEST SHALL BE 3040.
3036	CONNECTORS SHALL BE WIRED WITH WIRE HAVING AN OUTSIDE DIMENSION NOT LESS THAN 3036 INCH.
3037	CONNECTORS SHALL BE WIRED WITH WIRE HAVING AN OUTSIDE DIMENSION NOT LESS THAN 3037 MILLIMETER(S).
3034	WIRE TYPE 3034 SHALL BE USED.
3035	WIRE ENDS SHALL BE UNSEALED.
3039	WIRE ENDS SHALL BE SEALED.
3042	SEALING PLUGS SHALL BE INSTALLED IN 3042 PERCENT OF CONTACT CAVITIES.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ALTITUDE-LOW TEMPERATURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3116
NO EVIDENCE OF PHYSICAL DAMAGE OR DIELECTRIC BREAKDOWN.	3118
MAXIMUM LEAKAGE CURRENT (MILLIAMPERES)	2100
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3108
PER MIL-STD-1344, METHOD 1011.	3110
MINIMUM APPLIED VOLTAGE AT REDUCED CONDITIONS (VOLTS RMS)	2102
GROMMET SEALING PLUGS (PERCENT)	2104
ACCESSORIES (NAME)	2106
MINIMUM APPLIED VOLTAGE AT AMBIENT CONDITIONS (VOLTS RMS)	2108

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3116	ALTITUDE-LOW TEMPERATURE. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3116.
3118	ALTITUDE-LOW TEMPERATURE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE OR DIELECTRIC BREAKDOWN.
2100	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 2100 MILLIAMPERE(S).
3108	ALTITUDE-LOW TEMPERATURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3108.
3110	ALTITUDE-LOW TEMPERATURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1011 OF MIL-STD-1344.
2102	THE VOLTAGE TO BE APPLIED AT REDUCED TEMPERATURE AND PRESSURE SHALL BE NOT LESS THAN 2102 VOLTS RMS.
2104	CONNECTORS SHALL BE WIRED BUT 2104 PERCENT OF THE CONTACT CAVITIES SHALL CONTAIN GROMMET SEALING PLUGS.
2106	CONNECTOR ACCESSORY(S) TO BE ON CONNECTOR SPECIMEN DURING TEST SHALL BE 2106.
2108	THE DIELECTRIC WITHSTANDING VOLTAGE TO BE APPLIED AT AMBIENT CONDITIONS SHALL BE NOT LESS THAN 2108 VOLTS RMS.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ALTITUDE-LOW TEMPERATURE (CONT)	
PER MIL-STD-1344, METHOD 1011. (CONT)	
VOLTAGE DURATION AT REDUCED CONDITIONS (SECONDS)	2110
VOLTAGE DURATION AT AMBIENT CONDITIONS (SECONDS)	2112
CABLE PULL-OUT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3127
NO EVIDENCE OF PHYSICAL DAMAGE.	3128
NO DISCONTINUITY.	3130
MAXIMUM LINEAR MOTION (SELECT ONE)	
(INCHES)	3132
(MILLIMETERS)	3134
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3136

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2110	THE DURATION OF VOLTAGE APPLICATION AT REDUCED PRESSURE SHALL BE NOT LESS THAN 2110 SECONDS.
2112	THE DURATION OF VOLTAGE APPLICATION AT AMBIENT CONDITIONS SHALL BE NOT LESS THAN 2112 SECONDS.
3127	CABLE PULL-OUT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3127.
3128	CABLE PULL-OUT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
3130	THERE SHALL BE NO DISCONTINUITY.
3132	THE LINEAR MOTION OF THE CABLE WITH RESPECT TO THE CLAMP SHALL BE NOT GREATER THAN 3132 INCH(S).
3134	THE LINEAR MOTION OF THE CABLE WITH RESPECT TO THE CLAMP SHALL BE NOT GREATER THAN 3134 MILLIMETER(S).
3136	CABLE PULL-OUT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT EXCEPT 3136.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CABLE PULL-OUT (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-1344, METHOD 2009.	3138
*TEST CONDITION (LETTER)	3140
CABLE (DESIGNATION)	3142
CABLE SEAL FLEXING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3144
NO EVIDENCE OF SEAL DAMAGE.	3146
NO EVIDENCE OF DIELECTRIC BREAKDOWN.	3148
MINIMUM INSULATION RESISTANCE (MEGOHMS)	3150
NO SHORTING.	3152
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY.	3154
MAXIMUM (MICROSECONDS)	3156

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3138	CABLE PULL-OUT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2009 OF MIL-STD-1344.
3140	TEST CONDITION LETTER 3140 SHALL APPLY.
3142	THE CABLE TO BE USED SHALL BE 3142.
3144	CABLE SEAL FLEXING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3144.
3146	CABLE SEAL FLEXING. THERE SHALL BE NO EVIDENCE OF DAMAGE WHICH COULD ALLOW UNDESIRED SUBSTANCES TO ENTER THE INSULATION AND TO CAUSE DETERIORATION OF ELECTRICAL PERFORMANCE.
3148	THERE SHALL BE NO EVIDENCE OF DIELECTRIC BREAKDOWN.
3150	THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 3150 MEGOHM(S).
3152	THERE SHALL BE NO EVIDENCE OF SHORTING BETWEEN CONDUCTORS.
3154	THERE SHALL BE NO EVIDENCE OF DISCONTINUITY.
3156	DISCONTINUITY SHALL BE NOT GREATER THAN 3156 MICROSECOND(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CABLE SEAL FLEXING (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3158
PER MIL-STD-1344, METHOD 2017.	3160
PROCEDURE I.	3162
MINIMUM ROLLER DIAMETER (SELECT ONE)	
(INCHES)	3164
(MILLIMETERS)	3166
MINIMUM DIMENSION X (SELECT ONE)	
(INCHES)	3168
(MILLIMETERS)	3170
PROCEDURE II.	3172
METHOD (NUMBER)	3174
MINIMUM TENSION (SELECT ONE)	
(POUNDS/INCH CABLE WIDTH)	3176
(KILOGRAMS/MILLIMETER CABLE WIDTH)	3178

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3158	CABLE SEAL FLEXING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3158.
3160	CABLE SEAL FLEXING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2017 OF MIL-STD-1344.
3162	TEST PROCEDURE I SHALL APPLY.
3164	THE ROLLER DIAMETER SHALL BE NOT LESS THAN 3164 INCH(S).
3166	THE ROLLER DIAMETER SHALL BE NOT LESS THAN 3166 MILLIMETER(S).
3168	DIMENSION X BETWEEN THE NEAREST END OF INTERNAL CABLE CLAMP AND ROLLER CENTERLINE SHALL BE NOT LESS THAN 3168 INCH(S).
3170	DIMENSION X BETWEEN THE NEAREST END OF INTERNAL CABLE CLAMP AND ROLLER CENTERLINE SHALL BE NOT LESS THAN 3170 MILLIMETER(S).
3172	TEST PROCEDURE II SHALL APPLY.
3174	METHOD NUMBER 3174 SHALL BE USED.
3176	CABLE TENSION SHALL BE NOT LESS THAN 3176 POUND(S) PER INCH-OF-CABLE-WIDTH.
3178	CABLE TENSION SHALL BE NOT LESS THAN 3178 KILOGRAM(S) PER MILLIMETER-OF-CABLE-WIDTH.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CABLE SEAL FLEXING (CONT)	
PROCEDURE II. (CONT)	
MAXIMUM TENSION (SELECT ONE)	
(POUNDS/INCH CABLE WIDTH)	3180
(KILOGRAMS/MILLIMETER CABLE WIDTH)	3182
CYCLE RATE (CYCLES/MINUTE)	3184
NUMBER OF CYCLES (QUANTITY)	3186
CABLE (DESIGNATION)	3188
CONTACT AXIAL CONCENTRICITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3190
MAXIMUM TRUE INDICATOR READING (VALUE)	3192
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3194
PER MIL-STD-1344, METHOD 2001.	3196

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3180	CABLE TENSION SHALL BE NOT GREATER THAN 3180 POUNDS PER INCH-OF-CABLE-WIDTH.
3182	CABLE TENSION SHALL BE NOT GREATER THAN 3182 KILOGRAMS PER MILLIMETER-OF-CABLE-WIDTH.
3184	CYCLING RATE SHALL BE APPROXIMATELY 3184 CYCLES PER MINUTE.
3186	THERE SHALL BE 3186 CYCLES PERFORMED.
3188	THE CABLE TO BE USED SHALL BE 3188.
3190	CONTACT AXIAL CONCENTRICITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3190.
3192	CONTACT AXIAL CONCENTRICITY. THE TRUE INDICATOR READING SHALL BE NOT GREATER THAN 3192.
3194	CONTACT AXIAL CONCENTRICITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3194.
3196	CONTACT AXIAL CONCENTRICITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2001 OF MIL-STD-1344.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT ENGAGEMENT AND SEPARATION FORCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1712
AS FOLLOWS:	3198
MAXIMUM ENGAGEMENT FORCE (SELECT ONE)	
(POUNDS)	3200
(NEWTONS)	3202
MAXIMUM SEPARATION FORCE (SELECT ONE)	
(POUNDS)	3204
(NEWTONS)	3206
MINIMUM SEPARATION FORCE (SELECT ONE)	
(POUNDS)	1716
(NEWTONS)	3208
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1705

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1712	CONTACT ENGAGEMENT AND SEPARATION FORCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1712.
3198	CONTACT ENGAGEMENT AND SEPARATION FORCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3200	THE ENGAGEMENT FORCE SHALL BE NOT GREATER THAN 3200 POUND(S).
3202	THE ENGAGEMENT FORCE SHALL BE NOT GREATER THAN 3202 NEWTON(S).
3204	THE SEPARATION FORCE SHALL BE NOT GREATER THAN 3204 POUND(S).
3206	THE SEPARATION FORCE SHALL BE NOT GREATER THAN 3206 NEWTON(S).
1716	THE SEPARATION FORCE SHALL BE NOT LESS THAN 1716 POUND(S).
3208	THE SEPARATION FORCE SHALL BE NOT LESS THAN 3208 NEWTON(S).
1705	CONTACT ENGAGEMENT AND SEPARATION FORCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1705.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT ENGAGEMENT AND SEPARATION FORCE (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-1344, METHOD 2014.	3210
PROCEDURE I.	3212
MAXIMUM PIN DIAMETER (SELECT ONE)	
(INCH)	3214
(MILLIMETERS)	3216
MAXIMUM BLADE WIDTH (SELECT ONE)	
(INCH)	3218
(MILLIMETERS)	3220
MAXIMUM BLADE THICKNESS (SELECT ONE)	
(INCH)	3222
(MILLIMETERS)	3224
MINIMUM PIN DIAMETER (SELECT ONE)	
(INCH)	3226
(MILLIMETERS)	3228

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
3210	CONTACT ENGAGEMENT AND SEPARATION FORCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2014 OF MIL-STD-1344.
3212	PROCEDURE I SHALL APPLY.
3214	THE MAXIMUM SIZE PIN SHALL BE 3214 INCH DIAMETER.
3216	THE MAXIMUM SIZE PIN SHALL BE 3216 MILLIMETER(S) DIAMETER.
3218	THE MAXIMUM SIZE BLADE SHALL BE 3218 INCH IN WIDTH.
3220	THE MAXIMUM SIZE BLADE SHALL BE 3220 MILLIMETER(S) IN WIDTH.
3222	THE MAXIMUM SIZE BLADE SHALL BE 3222 INCH IN THICKNESS.
3224	THE MAXIMUM SIZE BLADE SHALL BE 3224 MILLIMETER(S) IN THICKNESS.
3226	THE MINIMUM SIZE PIN SHALL BE 3226 INCH DIAMETER.
3228	THE MINIMUM SIZE PIN SHALL BE 3228 MILLIMETER(S) DIAMETER.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT ENGAGEMENT AND SEPARATION FORCE (CONT)	
PROCEDURE I. (CONT)	
MINIMUM BLADE WIDTH (SELECT ONE)	
(INCH)	3230
(MILLIMETERS)	3232
MINIMUM BLADE THICKNESS (SELECT ONE)	
(INCH)	3234
(MILLIMETERS)	3236
PROCEDURE II.	3238
CONTACT (PART NUMBER)	3240
MAXIMUM SURFACE ROUGHNESS (SELECT ONE)	
(MICROINCHES RMS)	3242
(MICROMETERS RMS)	3244
MINIMUM DEPTH OF ENGAGEMENT (SELECT ONE)	
(INCH)	3246
(MILLIMETERS)	3248

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3230	THE MINIMUM SIZE BLADE SHALL BE 3230 INCH IN WIDTH.
3232	THE MINIMUM SIZE BLADE SHALL BE 3232 MILLIMETER(S) IN WIDTH.
3234	THE MINIMUM SIZE BLADE SHALL BE 3234 INCH IN THICKNESS.
3236	THE MINIMUM SIZE BLADE SHALL BE 3236 MILLIMETER(S) IN THICKNESS.
3238	PROCEDURE II SHALL APPLY.
3240	THE PART NUMBER OF THE QUALIFIED CONTACT TO BE INSERTED SHALL BE 3240.
3242	TEST CONTACT SURFACE FINISH SHALL BE NOT GREATER THAN 3242 MICROINCHES RMS.
3244	TEST CONTACT SURFACE FINISH SHALL BE NOT GREATER THAN 3244 MICROMETERS RMS.
3246	DEPTH OF ENGAGEMENT SHALL BE NOT LESS THAN 3246 INCH.
3248	DEPTH OF ENGAGEMENT SHALL BE NOT LESS THAN 3248 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT INSERTION AND REMOVAL FORCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1746
AS FOLLOWS:	3250
MAXIMUM INSERTION FORCE (SELECT ONE)	
(POUNDS)	1748
(NEWTONS)	3252
MAXIMUM REMOVAL FORCE (SELECT ONE)	
(POUNDS)	1752
(NEWTONS)	3254
MINIMUM REMOVAL FORCE (SELECT ONE)	
(POUNDS)	1750
(NEWTONS)	3256
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1738

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1746	CONTACT INSERTION AND REMOVAL FORCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1746.
3250	CONTACT INSERTION AND REMOVAL FORCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1748	THE FORCE REQUIRED TO INSERT A CONTACT SHALL BE NOT GREATER THAN 1748 POUND(S).
3252	THE FORCE REQUIRED TO INSERT A CONTACT SHALL BE NOT GREATER THAN 3252 NEWTON(S).
1752	THE FORCE REQUIRED TO REMOVE A CONTACT SHALL BE NOT GREATER THAN 1752 POUND(S).
3254	THE FORCE REQUIRED TO REMOVE A CONTACT SHALL BE NOT GREATER THAN 3254 NEWTON(S).
1750	THE FORCE REQUIRED TO REMOVE A CONTACT SHALL BE NOT LESS THAN 1750 POUND(S).
3256	THE FORCE REQUIRED TO REMOVE A CONTACT SHALL BE NOT LESS THAN 3256 NEWTON(S).
1738	CONTACT INSERTION AND REMOVAL FORCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1738.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT INSERTION AND REMOVAL FORCE (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-1344, METHOD 2012.	3258
QUANTITY OF CONTACTS MEASURED (PERCENT)	1740
WIRE TYPE (DESIGNATION)	3260
WIRE DOCUMENT (DOC DES)	3262
CONDUCTOR SIZE (DESIGNATION)	3264
INSERTIONS AND WITHDRAWALS (QUANTITY)	3261
INSERTION TOOL (PART NUMBER)	3268
EXTRACTION TOOL (PART NUMBER)	3270
CONTACT PIN STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2300
MAXIMUM PERMANENT SET (INCH)	2304
MAXIMUM PERMANENT SET (MILLIMETERS)	3272

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3258	CONTACT INSERTION AND REMOVAL FORCE. TESTING SHALL BE IN ACCORDANCE WITH METHOD 2012 OF MIL-STD-1344.
1740	THE CONNECTOR SHALL HAVE 1740 PERCENT OF THE CONTACTS MEASURED.
3260	WIRE TYPE 3260 SHALL BE USED.
3262	WIRE SHALL BE IN ACCORDANCE WITH 3262.
3264	CONDUCTOR SIZE 3264 SHALL BE USED.
3261	THERE SHALL BE 3261 INSERTIONS AND WITHDRAWALS WITH MEASUREMENTS TAKEN ON THE FIRST AND LAST CYCLES.
3268	INSERTION TOOL PART NUMBER SHALL BE 3268.
3270	EXTRACTION TOOL PART NUMBER SHALL BE 3270.
2300	CONTACT PIN STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2300.
2304	CONTACT PIN STRENGTH. THE PIN STRENGTH SHALL BE SUCH THAT THE APPLIED FORCE WILL PRODUCE A PERMANENT SET NOT GREATER THAN 2304 INCH.
3272	CONTACT PIN STRENGTH. THE PIN STRENGTH SHALL BE SUCH THAT THE APPLIED FORCE WILL PRODUCE A PERMANENT SET NOT GREATER THAN 3272 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT PIN STRENGTH (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2294
PER MIL-C-24308.	3274
MAXIMUM APPLIED FORCE (SELECT ONE)	
(POUNDS)	2295
(NEWTONS)	3276
MINIMUM APPLIED FORCE (SELECT ONE)	
(POUNDS)	3278
(NEWTONS)	3280
LOAD DURATION (MINUTES)	2297
CONTACT RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2294	CONTACT PIN STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2294.
3274	CONTACT PIN STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE CONTACT PIN STRENGTH TEST OF MIL-C-24308.
2295	THE FORCE APPLIED TO THE CONTACT PIN SHALL BE NOT GREATER THAN 2295 POUND(S).
3276	THE FORCE APPLIED TO THE CONTACT PIN SHALL BE NOT GREATER THAN 3276 NEWTON(S).
3278	THE FORCE APPLIED TO THE CONTACT PIN SHALL BE NOT LESS THAN 3278 POUND(S).
3280	THE FORCE APPLIED TO THE CONTACT PIN SHALL BE NOT LESS THAN 3280 NEWTON(S).
2297	THE LOADING DURATION SHALL BE NOT GREATER THAN 2297 MINUTE(S).
2000	CONTACT RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2000.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT RESISTANCE (CONT)	
REQUIREMENTS (CONT)	
MAXIMUM CONTACT RESISTANCE (OHMS)	2002
MAXIMUM CONTACT RESISTANCE (MILLIVOLTS)	3282
MAXIMUM CONTACT RESISTANCE AT ELEVATED TEMPERATURE (SELECT ONE)	
(OHMS)	3284
(MILLIVOLTS)	3286
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1980
PER MIL-STD-1344, METHOD 3004.	3288
TEST CURRENT (SELECT ONE)	
(AMPERES)	1990
(MILLIAMPERES)	3289
HIGH TEMPERATURE TEST (DEGREES CELSIUS)	1994

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
2002	CONTACT RESISTANCE. CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2002 OHM(S).
3282	CONTACT RESISTANCE. CONTACT RESISTANCE SHALL BE NOT GREATER THAN 3282 MILLIVOLT(S) DROP.
3284	CONTACT RESISTANCE AT ELEVATED TEMPERATURE SHALL BE NOT GREATER THAN 3284 OHM(S).
3286	CONTACT RESISTANCE AT ELEVATED TEMPERATURE SHALL BE NOT GREATER THAN 3286 MILLIVOLT(S) DROP.
1980	CONTACT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1980.
3288	CONTACT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3004 OF MIL-STD-1344.
1990	THE TEST CURRENT SHALL BE 1990 AMPERE(S).
3289	THE TEST CURRENT SHALL BE 3289 MILLIAMPERE(S).
1994	IN ADDITION TO MEASUREMENT AT AMBIENT TEMPERATURE, PERFORM MEASUREMENT AT 1994 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT RETENTION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3002
NO EVIDENCE OF PHYSICAL DAMAGE.	3290
MAXIMUM DISPLACEMENT WITH FORCE APPLIED (SELECT ONE)	
(INCH)	3004
(MILLIMETERS)	3292
MAXIMUM DISPLACEMENT AFTER FORCE REMOVAL (SELECT ONE)	
(INCH)	3006
(MILLIMETERS)	3294
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2088
PER MIL-STD-1344, METHOD 2007.	3296

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3002	CONTACT RETENTION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3002.
3290	CONTACT RETENTION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
3004	THE AXIAL DISPLACEMENT SHALL BE NOT GREATER THAN 3004 INCH DURING APPLICATION OF AXIAL FORCE.
3292	THE AXIAL DISPLACEMENT SHALL BE NOT GREATER THAN 3292 MILLIMETER(S) DURING APPLICATION OF AXIAL FORCE.
3006	THE AXIAL DISPLACEMENT SHALL BE NOT GREATER THAN 3006 INCH AFTER REMOVAL OF AXIAL FORCE.
3294	THE AXIAL DISPLACEMENT SHALL BE NOT GREATER THAN 3294 MILLIMETER(S) AFTER REMOVAL OF AXIAL FORCE.
2088	CONTACT RETENTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2088.
3296	CONTACT RETENTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2007 OF MIL-STD-1344.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT RETENTION (CONT)	
PER MIL-STD-1344, METHOD 2007. (CONT)	
APPLIED LOAD (SELECT ONE)	
(POUNDS)	2090
PLUS TOLERANCE (POUNDS)	3298
MINUS TOLERANCE (POUNDS)	3300
(NEWTONS)	3302
PLUS TOLERANCE (NEWTONS)	3304
MINUS TOLERANCE (NEWTONS)	3306
LOAD DIRECTION (SELECT ONE)	
WIRE SIDE.	3308
FRONT SIDE.	3310
WIRE AND FRONT SIDE.	2099
QUANTITY CONTACTS TESTED (PERCENT)	3312
CONTACT WIRING (SELECT ONE)	
CUT OFF WIRES.	2094
UNWIRED CONTACTS.	3314

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2090	THE APPLIED AXIAL LOAD SHALL BE 2090 POUND(S).
3298	THE APPLIED AXIAL LOAD PLUS TOLERANCE SHALL BE 3298 POUND(S).
3300	THE APPLIED AXIAL LOAD MINUS TOLERANCE SHALL BE 3300 POUND(S).
3302	THE APPLIED AXIAL LOAD SHALL BE 3302 NEWTON(S).
3304	THE APPLIED AXIAL LOAD PLUS TOLERANCE SHALL BE 3304 NEWTON(S).
3306	THE APPLIED AXIAL LOAD MINUS TOLERANCE SHALL BE 3306 NEWTON(S).
3308	LOAD SHALL BE APPLIED TO THE WIRE SIDE OF THE CONTACT.
3310	LOAD SHALL BE APPLIED TO THE FRONT SIDE OF THE CONTACT.
2099	LOAD SHALL BE APPLIED TO BOTH THE WIRE SIDE AND THE FRONT SIDE OF THE CONTACT.
3312	THE CONNECTOR SHALL HAVE 3312 PERCENT OF THE CONTACTS TESTED.
2094	WIRES SHALL BE CUT OFF FLUSH WITH THE CONTACTS.
3314	UNWIRED CONTACTS SHALL BE USED.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CRIMP TENSILE STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3102
MINIMUM TENSILE STRENGTH (POUNDS)	3104
WIRE (SIZE)	3105
MINIMUM TENSILE STRENGTH (NEWTONS)	3316
WIRE (SIZE)	3318
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3094
PER MIL-STD-1344, METHOD 2003.	3320
SAMPLE (QUANTITY)	3096
CRIMP TOOL (PART NUMBER)	3098
CRUSH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3322

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3102	CRIMP TENSILE STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3102.
3104	CRIMP TENSILE STRENGTH. THE TENSILE FORCE REQUIRED TO SEPARATE THE WIRE FROM THE CONTACT CRIMP BARREL SHALL BE NOT LESS THAN 3104 POUND(S). WIRE BREAKAGE NOT DUE TO CRIMPING, AT LESS THAN THE TENSILE FORCE, SHALL NOT CONSTITUTE A FAILURE.
3105	FORCE SPECIFIED IS FOR SIZE 3105 WIRE.
3316	CRIMP TENSILE STRENGTH. THE TENSILE FORCE REQUIRED TO SEPARATE THE WIRE FROM THE CONTACT CRIMP BARREL SHALL BE NOT LESS THAN 3316 NEWTON(S). WIRE BREAKAGE NOT DUE TO CRIMPING, AT LESS THAN THE TENSILE FORCE, SHALL NOT CONSTITUTE A FAILURE.
3318	FORCE SPECIFIED IS FOR SIZE 3318 WIRE.
3094	CRIMP TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3094.
3320	CRIMP TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2003 OF MIL-STD-1344.
3096	THE NUMBER OF TEST SAMPLES SHALL BE 3096.
3098	THE CRIMP TOOL PART NUMBER SHALL BE 3098.
3322	CRUSH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3322.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CRUSH (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE OR ELECTRICAL FAILURE.	3324
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3326
PER MIL-STD-1344, METHOD 2008.	3328
SPECIMEN (SELECT ONE)	
MATED PLUG AND RECEPTACLE.	3330
UNMATED CONNECTOR.	3332
TEST LOAD (SELECT ONE)	
(POUNDS)	3334
(KILOGRAMS)	3336
LOAD APPLICATIONS (QUANTITY)	3338
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4908

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3324	CRUSH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE OR ELECTRICAL FAILURE.
3326	CRUSH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3326.
3328	CRUSH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2008 OF MIL-STD-1344.
3330	TEST SPECIMEN SHALL CONSIST OF A MATED PLUG AND RECEPTACLE.
3332	TEST SPECIMEN SHALL BE AN UNMATED CONNECTOR.
3334	TEST LOAD SHALL BE 3334 POUND(S).
3336	TEST LOAD SHALL BE 3336 KILOGRAM(S).
3338	THERE SHALL BE 3338 LOAD APPLICATION(S).
4908	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4908.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4906
MAXIMUM LEAKAGE (MILLIAMPERES)	4894
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4884
PER MIL-STD-1344, METHOD 3001.	3340
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4885
(VOLTS, AC)	4849
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4859
DURATION OF VOLTAGE APPLICATION (SECONDS)	4891
MOUNTING PER DOCUMENT (DOC DES)	6280
REGULATION OF TEST VOLTAGE (PERCENT)	6308

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4906	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4894	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4894 MILLIAMPERE(S).
4884	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4884.
3340	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3001 OF MIL-STD-1344.
4885	TEST VOLTAGE SHALL BE 4885 VOLTS, DC.
4849	TEST VOLTAGE SHALL BE 4849 VOLTS, AC.
4859	SPECIAL PREPARATION SHALL BE IN ACCORDANCE WITH 4859.
4891	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4891 SECOND(S).
6280	MOUNTING SHALL BE IN ACCORDANCE WITH 6280.
6308	REGULATION OF THE TEST VOLTAGE SHALL BE WITHIN 6308 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
PER MIL-STD-1344, METHOD 3001. (CONT)	
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4900
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4902
(MILLIAMPERES)	6310
TEST SPECIMEN (SELECT ONE)	
MATED PLUG AND RECEPTACLE.	3342
UNMATED CONNECTOR.	3344
TEST CONDITION NUMBER	
II.	3346
III.	3348
IV.	3350
V.	3352
VI.	3354
WIRE ENDS (SELECT ONE)	
SEALED.	3356
UNSEALED.	3358

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4900	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4900 KILOVOLTAMPERE(S).
4902	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4902 AMPERE(S).
6310	THE SURGE CURRENT SHALL BE NOT GREATER THAN 6310 MILLIAMPERE(S).
3342	TEST SPECIMEN SHALL CONSIST OF A MATED PLUG AND RECEPTACLE.
3344	TEST SPECIMEN SHALL BE AN UNMATED CONNECTOR.
3346	TEST CONDITION II SHALL APPLY.
3348	TEST CONDITION III SHALL APPLY.
3350	TEST CONDITION IV SHALL APPLY.
3352	TEST CONDITION V SHALL APPLY.
3354	TEST CONDITION VI SHALL APPLY.
3356	WIRE ENDS SHALL BE SEALED.
3358	WIRE ENDS SHALL BE UNSEALED.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4874
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4856
MAXIMUM LEAKAGE (MILLIAMPERES)	4875
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4861
PER MIL-STD-1344, METHOD 3001, TEST CONDITION I.	3360
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4854
(VOLTS, AC)	4855
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4850
DURATION OF VOLTAGE APPLICATION (SECONDS)	4867

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
4874	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.
4856	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4875	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4875 MILLIAMPERE(S).
4861	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861.
3360	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3001 OF MIL-STD-1344. TEST CONDITION I SHALL APPLY.
4854	TEST VOLTAGE SHALL BE 4854 VOLTS, DC.
4855	TEST VOLTAGE SHALL BE 4855 VOLTS, AC.
4850	SPECIAL PREPARATION OR CONDITIONS SHALL BE IN ACCORDANCE WITH 4850.
4867	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4867 SECOND(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
PER MIL-STD-1344, METHOD 3001, TEST CONDITION I. (CONT)	
MOUNTING PER DOCUMENT (DOC DES)	5000
REGULATION OF TEST VOLTAGE (PERCENT)	4869
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4870
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4717
(MILLIAMPERES)	4897
METHOD OF VOLTAGE CONNECTION PER DOCUMENT (DOC DES)	6267
TEST SPECIMEN (SELECT ONE)	
MATED PLUG AND RECEPTACLE.	3362
UNMATED CONNECTOR.	3364
DURABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1632

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
5000	MOUNTING SHALL BE IN ACCORDANCE WITH 5000.
4869	REGULATION OF TEST VOLTAGE SHALL BE WITHIN 4869 PERCENT.
4870	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4870 KILOVOLTAMPERE(S).
4717	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4717 AMPERE(S).
4897	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4897 MILLIAMPERE(S).
6267	METHOD OF CONNECTION OF TEST VOLTAGE SHALL BE IN ACCORDANCE WITH 6267.
3362	TEST SPECIMEN SHALL CONSIST OF A MATED PLUG AND RECEPTACLE.
3364	TEST SPECIMEN SHALL CONSIST OF AN UNMATED CONNECTOR.
1632	DURABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1632.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DURABILITY (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF CONTACT OR INSERT DAMAGE.	1634
MAXIMUM CONTACT RESISTANCE (MILLIVOLTS)	3366
MINIMUM CONTACT SEPARATION FORCE (SELECT ONE)	
(POUNDS)	3368
(NEWTONS)	3370
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1624
PER MIL-STD-1344, METHOD 2016.	3372
CYCLES (QUANTITY)	1626
CYCLING RATE (CYCLES PER HOUR)	1628
FLAMMABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3374

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
1634	DURABILITY. THERE SHALL BE NO EVIDENCE OF UNEVEN WEAR ON ENGAGING HARDWARE, CONTACTS, OR GUIDE HARDWARE NOR EXCESSIVE REMOVAL OF PLATING ON CONTACTS. THERE SHALL BE NO DISPLACED, BROKEN OR BENT CONTACTS. INSERTS SHALL SHOW NO EVIDENCE OF PIERCING, BREAKING OR CHIPPING.
3366	THE CONTACT RESISTANCE MILLIVOLT DROP SHALL BE NOT GREATER THAN 3366 MILLIVOLT(S).
3368	THE INDIVIDUAL CONTACT SEPARATION FORCE AFTER TEST SHALL BE NOT LESS THAN 3368 POUND(S).
3370	THE INDIVIDUAL CONTACT SEPARATION FORCE AFTER TEST SHALL BE NOT LESS THAN 3370 NEWTON(S).
1624	DURABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1624.
3372	DURABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2016 OF MIL-STD-1344.
1626	THERE SHALL BE 1626 MATING AND UNMATING CYCLES.
1628	THE CYCLING RATE SHALL BE 1628 CYCLES PER HOUR.
3374	FLAMMABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3374.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLAMMABILITY (CONT)	
REQUIREMENTS (CONT)	
NO VIOLENT BURNING OR EXPLOSIVE TYPE FIRE.	3376
MAXIMUM FLAME DURATION (SECONDS)	3378
MAXIMUM AFTER-GLOW (SECONDS)	3380
MAXIMUM FLAME AND AFTER-GLOW (SECONDS)	3382
NO IGNITION OF FLAMMABLE MATERIAL.	3384
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3386
PER MIL-STD-1233, METHOD 1012.	3388
TEST CONDITION (LETTER)	3390
FLUID IMMERSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1782
NO EVIDENCE OF PHYSICAL DAMAGE.	3430
MEET MATING AND UNMATING FORCE REQUIREMENTS.	3432

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3376	FLAMMABILITY. THERE SHALL BE NO VIOLENT BURNING OR EXPLOSIVE TYPE FIRE.
3378	FLAME SHALL EXTINGUISH WITHIN 3378 SECOND(S).
3380	AFTER-GLOW SHALL EXTINGUISH WITHIN 3380 SECOND(S).
3382	FLAME AND AFTER-GLOW SHALL EXTINGUISH WITHIN 3382 SECOND(S).
3384	THERE SHALL BE NO DRIPPING WHICH SHALL CAUSE THE FLAMMABLE MATERIAL TO IGNITE.
3386	FLAMMABILITY. TESTING SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3386.
3388	FLAMMABILITY. TESTING SHALL BE IN ACCORDANCE WITH METHOD 1012 OF MIL-STD-1344.
3390	TEST CONDITION 3390 SHALL APPLY.
1782	FLUID IMMERSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1782.
3430	FLUID IMMERSION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE, BUT DISCOLORATION SHALL NOT BE CONSIDERED DETRIMENTAL.
3432	CONNECTORS SHALL MEET MATING AND UNMATING FORCE REQUIREMENT(S) AFTER TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLUID IMMERSION (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1776
PER MIL-STD-1344, METHOD 1016.	3434
FLUIDS DELETED (LETTERS)	3436
FLUIDS ADDED (NAME)	3438
IMMERSION DURATION (SELECT ONE)	
(MINUTES)	3440
(HOURS)	3442
DRAIN DURATION (HOURS)	3444
OVEN CURE TEMPERATURE (DEGREES CELSIUS)	1778
CYCLES OF IMMERSION (QUANTITY)	3446
IMMERSION DURATION IN METHOD 1016 FLUIDS (HOURS)	1779
SPECIMEN (SELECT ONE)	
UNMATED CONNECTOR WITHOUT CONTACTS.	3448
MATED WIRED PAIR.	3450

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1776	FLUID IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1776.
3434	FLUID IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1016 OF MIL-STD-1344.
3436	FLUID(S) AS REFERENCED IN METHOD 1016 OF MIL-STD-1344 WHICH SHALL NOT BE USED SHALL BE LETTER(S) 3436.
3438	FLUID(S) TO BE ADDED SHALL BE 3438.
3440	ADDED FLUID(S) IMMERSION DURATION SHALL BE 3440 MINUTE(S).
3442	ADDED FLUID(S) IMMERSION DURATION SHALL BE 3442 HOUR(S).
3444	ADDED FLUID(S) DRAIN DURATION SHALL BE 3444 HOUR(S).
1778	ADDED FLUID(S) 6-HOUR OVEN CURE TEMPERATURE SHALL BE 1778 DEGREES CELSIUS.
3446	THERE SHALL BE 3446 CYCLE(S) OF IMMERSION IN THE ADDED FLUID(S).
1779	IMMERSION DURATION FOR FLUIDS REFERENCED IN METHOD 1016 OF MIL-STD-1344 SHALL BE 1779 HOUR(S).
3448	ONE UNMATED CONNECTOR WITHOUT CONTACTS SHALL BE IMMERSED IN EACH SPECIFIED FLUID.
3450	A MATED PAIR OF WIRED CONNECTORS SHALL BE IMMERSED IN EACH FLUID.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4760
FUNGUS RESISTANT BY CERTIFICATION OR BY TEST.	4761
NO EVIDENCE OF FUNGUS GROWTH WHEN TESTED.	4762
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4754
PER MIL-STD-810, METHOD 508.	4755
TEST PERIOD (DAYS)	4756
GAGE LOCATION AND RETENTION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1768

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4760	FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.
4761	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED, THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4762	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLE TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4754	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.
4755	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.
4756	TEST PERIOD SHALL BE 4756 DAY(S).
1768	GAGE LOCATION AND RETENTION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1768.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
GAGE LOCATION AND RETENTION (CONT)	
REQUIREMENTS (CONT)	
CONFORM TO SPECIFIED DIMENSIONS.	3452
MAXIMUM DISPLACEMENT AFTER LOADING (SELECT ONE)	
(INCH)	1770
(MILLIMETERS)	3454
GAGE RETAINED.	3456
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1756
PER MIL-STD-1344, METHOD 2018.	3458
TEST GAGE PER (DOC DES)	1761
REFERENCE PLANE ____	3460
APPLIED AXIAL LOAD (SELECT ONE)	
(POUNDS)	1764
(NEWTONS)	3462

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3452	GAGE LOCATION AND RETENTION. GAGE LOACTION MEASUREMENTS SHALL FALL WITHIN THE SPECIFIED RANGE.
1770	THE DISPLACEMENT AFTER INITIAL LOAD IS APPLIED SHALL BE NOT GREATER THAN 1770 INCH.
3454	THE DISPLACEMENT AFTER INITIAL LOAD IS APPLIED SHALL BE NOT GREATER THAN 3454 MILLIMETER(S).
3456	GAGES SHALL BE RETAINED IN THE CONTACT CAVITIES.
1756	GAGE LOCATION AND RETENTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1756.
3458	GAGE LOCATION AND RETENTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2018 OF MIL-STD-1344.
1761	TEST GAGE(S) SHALL BE IN ACCORDANCE WITH 1761.
3460	THE REFERENCE PLANE SHALL BE 3460.
1764	APPLIED AXIAL LOAD SHALL BE 1764 POUND(S).
3462	APPLIED AXIAL LOAD SHALL BE 3462 NEWTON(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4798
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	4799
NO DEGRADATION OF PERFORMANCE.	4815
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1477
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	4795
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	4805
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	4813
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	4803
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4788

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4798	HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.
4799	HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
4815	THERE SHALL BE NO DEGRADATION OF PERFORMANCE.
1477	THERE SHALL BE NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DIELECTRIC WITHSTANDING VOLTAGE IS PERFORMED.
4795	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4795 MEGOHM(S) AT HIGH HUMIDITY.
4805	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4805 MEGOHM(S) AFTER DRYING.
4813	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4813 MILLIAMPERE(S) AT HIGH HUMIDITY.
4803	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4803 MILLIAMPERE(S) AFTER DRYING.
4788	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-1344, METHOD 1002.	3464
PROCEDURE TYPE (SELECT ONE)	
TYPE I.	3466
DURATION OF POLARIZING VOLTAGE (HOURS)	4790
TYPE II.	3468
STEP 7A NOT REQUIRED.	3470
TYPE III.	3472
STEP 7A NOT REQUIRED.	3474
POLARIZING VOLTAGE (VOLTS DC)	4793
POLARIZING VOLTAGE BETWEEN ALTERNATE CONTACTS CONNECTED ELECTRICALLY AND OTHER CONTACTS AND SHELL CONNECTED ELECTRICALLY.	3476
SPECIMEN (SELECT ONE)	
MATED, WIRED CONNECTORS.	3478
INDIVIDUAL, WIRED CONNECTORS.	3480
SEALING PLUGS IN (PERCENT OF CAVITIES)	3482
WIRE (SIZE)	3484
WIRE (TYPE)	3486

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3464	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1002 OF MIL-STD-1344.
3466	PROCEDURE TYPE I SHALL APPLY.
4790	POLARIZING VOLTAGE SHALL BE APPLIED FOR 4790 HOUR(S).
3468	PROCEDURE TYPE II SHALL APPLY.
3470	STEP 7A SHALL NOT APPLY.
3472	PROCEDURE TYPE III SHALL APPLY.
3474	STEP 7A SHALL NOT APPLY.
4793	POLARIZING VOLTAGE SHALL BE 4793 VOLTS DC.
3476	POLARIZING VOLTAGE SHALL BE APPLIED BETWEEN ALTERNATE CONTACTS CONNECTED TOGETHER ELECTRICALLY AND THE REMAINING CONTACTS AND SHELL CONNECTED ELECTRICALLY.
3478	MATED, WIRED CONNECTORS SHALL BE TESTED.
3480	INDIVIDUAL, WIRED CONNECTORS SHALL BE TESTED.
3482	SEALING PLUGS SHALL BE INSTALLED IN 3482 PERCENT OF THE CONTACT CAVITIES.
3484	CONTACTS SHALL BE WIRED WITH SIZE 3484 WIRE.
3486	WIRE TYPE SHALL BE 3486.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
PER MIL-STD-1344, METHOD 1002. (CONT)	
DIELECTRIC WITHSTANDING VOLTAGE (SELECT ONE)	
(VOLTS AC)	3487
(VOLTS DC)	3488
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	3489
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER REMOVAL FROM CHAMBER.	3490
INSERT RETENTION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1732
RETAIN INSERT WITHOUT DAMAGE.	1734
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1720
PER MIL-STD-1344, METHOD 2010.	3492

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3487	THE DIELECTRIC WITHSTANDING VOLTAGE SHALL BE 3487 VOLTS AC.
3488	THE DIELECTRIC WITHSTANDING VOLTAGE SHALL BE 3488 VOLTS DC.
3489	PERFORM DIELECTRIC WITHSTANDING VOLTAGE AT HIGH HUMIDITY.
3490	PERFORM DIELECTRIC WITHSTANDING VOLTAGE AFTER REMOVAL FROM THE CHAMBER.
1732	INSERT RETENTION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1732.
1734	INSERT RETENTION. THE CONNECTOR SHALL RETAIN THE INSERT IN THE PROPER LOCATION IN THE SHELL. EVIDENCE OF CRACKING, BREAKING, INSERT SEPARATION FROM THE SHELL, OR LOOSENING OF PARTS SHALL BE CAUSE FOR REJECTION.
1720	INSERT RETENTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1720.
3492	INSERT RETENTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2010 OF MIL-STD-1344.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSERT RETENTION (CONT)	
PER MIL-STD-1344, METHOD 2010. (CONT)	
APPLIED LOAD (SELECT ONE)	
(POUNDS PER SQUARE INCH)	1722
(KILOPASCALS)	3494
SPECIMEN (SELECT ONE)	
WIRED.	3496
UNWIRED.	3498
PRESSURE APPLICATION (SELECT ONE)	
FRONT FACE.	1724
REAR FACE.	1725
FRONT AND REAR FACE.	1727
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1380

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1722	THE LOAD TO BE APPLIED SHALL BE NOT LESS THAN 1722 POUNDS PER SQUARE INCH.
3494	THE LOAD TO BE APPLIED SHALL BE NOT LESS THAN 3494 KILOPASCAL(S).
3496	TEST SPECIMEN SHALL BE WIRED.
3498	TEST SPECIMEN SHALL BE UNWIRED.
1724	THE PRESSURE SHALL BE APPLIED TO THE FRONT FACE OF THE CONNECTOR INSERT.
1725	THE PRESSURE SHALL BE APPLIED TO THE REAR FACE OF THE CONNECTOR INSERT.
1727	THE PRESSURE SHALL BE APPLIED TO BOTH FACES OF THE CONNECTOR INSERT.
1380	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	6359
*MINIMUM INSULATION RESISTANCE (SELECT ONE)	
SINGLE TEST	
(MEGOHMS)	1386
MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	1384
*SECOND TEST (MEGOHMS)	1387
NO EVIDENCE OF PHYSICAL DAMAGE.	1407
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1371
PER MIL-STD-1344, METHOD 3003.	3500
TEST VOLTAGE (VOLTS, DC)	1373
ELECTRIFICATION TIME (SECONDS)	1376

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6359	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1386	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 1386 MEGOHM(S).
1384	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1384 MEGOHM(S) AT THE FIRST TEST TEMPERATURE.
1387	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1387 MEGOHM(S) AT THE SECOND TEST TEMPERATURE.
1407	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1371	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.
3500	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3003 OF MIL-STD-1344.
1373	TEST POTENTIAL SHALL BE 1373 VOLTS, DC.
1376	ELECTRIFICATION DURATION SHALL BE 1376 SECOND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
PER MIL-STD-1344, METHOD 3003. (CONT)	
MAXIMUM MEASUREMENT ERROR AT REQUIRED VALUE (PERCENT)	1377
SPECIAL PREPARATIONS OR CONDITIONS PER DOCUMENT (DOC DES)	1520
FIRST TEST TEMPERATURE (DEGREES CELSIUS)	1372
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	1381
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1383
TEST SPECIMEN (SELECT ONE)	
CONNECTOR MATED PAIR.	3502
UNMATED CONNECTOR.	3504
SPECIAL PREPARATIONS ____	3506
LOW-SIGNAL LEVEL CONTACT RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2060
MAXIMUM VOLTAGE DROP (MILLIVOLTS)	3508

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1377	THE MEASUREMENT ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1377 PERCENT.
1520	SPECIAL PREPARATIONS OR CONDITIONS SHALL BE IN ACCORDANCE WITH 1520.
1372	FIRST TEST TEMPERATURE SHALL BE 1372 DEGREES CELSIUS.
1381	SECOND TEST TEMPERATURE SHALL BE 1381 DEGREES CELSIUS.
1383	TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1383 DEGREES CELSIUS.
3502	TEST SPECIMEN SHALL BE A CONNECTOR MATED PAIR.
3504	TEST SPECIMEN SHALL BE AN UNMATED CONNECTOR.
3506	SPECIAL PREPARATIONS SHALL BE 3506.
2060	LOW-SIGNAL LEVEL CONTACT RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2060.
3508	LOW-SIGNAL LEVEL CONTACT RESISTANCE. THE VOLTAGE DROP SHALL BE NOT GREATER THAN 3508 MILLIVOLT(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LOW-SIGNAL LEVEL CONTACT RESISTANCE (CONT)	
REQUIREMENTS (CONT)	
MAXIMUM CONTACT RESISTANCE (OHMS)	2062
MAXIMUM CHANGE IN READING (PERCENT)	3510
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2052
PER MIL-STD-1344, METHOD 3002.	3512
WIRE (SIZE)	2054
MINIMUM CONTACT INTERFACE (PERCENT)	3514
MAGNETIC PERMEABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1646
MAXIMUM PERMEABILITY (MU)	1648

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2062	LOW-SIGNAL LEVEL CONTACT RESISTANCE. THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2062 OHM(S).
3510	CONTACT RESISTANCE (VOLTAGE DROP) SHALL VARY NOT GREATER THAN 3510 PERCENT FROM ONE READING TO ANOTHER OR FROM THE READING AT NOMINAL CURRENT.
2052	LOW-SIGNAL LEVEL CONTACT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2052.
3512	LOW-SIGNAL LEVEL CONTACT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3002 OF MIL-STD-1344.
2054	CONTACTS SHALL BE WIRED WITH SIZE 2054 WIRE.
3514	CONTACT INTERFACE SHALL BE NOT LESS THAN 3514 PERCENT OF NOMINAL INTERFACE DIMENSION.
1646	MAGNETIC PERMEABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1646.
1648	MAGNETIC PERMEABILITY. THE PERMEABILITY SHALL BE NOT GREATER THAN 1648 MU.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAGNETIC PERMEABILITY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1640
PER MIL-STD-1344, METHOD 3006.	3516
TEST SPECIMEN (SELECT ONE)	
FULLY ASSEMBLED CONNECTOR.	3518
UNMATED CONNECTOR WITHOUT CONTACTS.	3520
CONNECTOR CONTACTS.	3522
MAINTENANCE AGING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2078
AS FOLLOWS:	3524
MAXIMUM INSERTION FORCE (SELECT ONE)	
(POUNDS)	2082
(NEWTONS)	3526

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1640	MAGNETIC PERMEABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1640.
3516	MAGNETIC PERMEABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3006 OF MIL-STD-1344.
3518	TEST SPECIMEN SHALL BE A FULLY ASSEMBLED CONNECTOR.
3520	TEST SPECIMEN SHALL BE AN UNMATED CONNECTOR WITHOUT CONTACTS.
3522	TEST SPECIMEN SHALL BE THE CONNECTOR CONTACT(S).
2078	MAINTENANCE AGING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2078.
3524	MAINTENANCE AGING. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2082	THE INSERTION FORCE SHALL BE NOT GREATER THAN 2082 POUND(S) AFTER TEST INSERTIONS AND WITHDRAWALS.
3526	THE INSERTION FORCE SHALL BE NOT GREATER THAN 3526 NEWTON(S) AFTER TEST INSERTIONS AND WITHDRAWALS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAINTENANCE AGING (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM REMOVAL FORCE (SELECT ONE)	
(POUNDS)	3528
(NEWTONS)	3530
MINIMUM REMOVAL FORCE (SELECT ONE)	
(POUNDS)	3532
(NEWTONS)	3534
MEET CONNECTOR MATING AND UNMATING FORCE REQUIREMENTS.	3536
MEET CONTACT RETENTION REQUIREMENTS.	3538
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2066
PER MIL-STD-1344, METHOD 2002.	3540
INSERTION TOOL (TYPE)	2068
REMOVAL TOOL (TYPE)	2070
WIRE (SIZE)	3542
WIRE (DOC DES)	3544

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3528	THE REMOVAL FORCE SHALL BE NOT GREATER THAN 3528 POUND(S) AFTER TEST INSERTIONS AND WITHDRAWALS.
3530	THE REMOVAL FORCE SHALL BE NOT GREATER THAN 3530 NEWTON(S) AFTER TEST INSERTIONS AND WITHDRAWALS.
3532	THE REMOVAL FORCE SHALL BE NOT LESS THAN 3532 POUND(S) AFTER TEST INSERTIONS AND WITHDRAWALS.
3534	THE REMOVAL FORCE SHALL BE NOT LESS THAN 3534 NEWTON(S) AFTER TEST INSERTIONS AND WITHDRAWALS.
3536	CONNECTORS SHALL MEET MATING AND UNMATING FORCE REQUIREMENT(S) AFTER TEST INSERTIONS AND WITHDRAWALS.
3538	CONNECTORS SHALL MEET CONTACT RETENTION REQUIREMENT(S) AFTER TEST INSERTIONS AND WITHDRAWALS.
2066	MAINTENANCE AGING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2066.
3540	MAINTENANCE AGING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2002 OF MIL-STD-1344.
2068	THE TYPE OF INSERTION TOOLS SHALL BE 2068.
2070	THE TYPE OF REMOVAL TOOLS SHALL BE 2070.
3542	CONTACT SHALL BE WIRE WITH SIZE 3542 WIRE.
3544	WIRE SHALL BE IN ACCORDANCE WITH 3544.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MATING AND UNMATING FORCES	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1658
AS FOLLOWS:	3546
MAXIMUM MATING FORCE (SELECT ONE)	
(POUNDS)	1660
(NEWTONS)	3548
MAXIMUM UNMATING FORCE (SELECT ONE)	
(POUNDS)	1663
(NEWTONS)	3550
MINIMUM UNMATING FORCE (SELECT ONE)	
(POUNDS)	1662
(NEWTONS)	3552

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1658	MATING AND UNMATING FORCES. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1658.
3546	MATING AND UNMATING FORCES. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1660	THE FORCE REQUIRED TO MATE CONNECTORS SHALL BE NOT GREATER THAN 1660 POUND(S) PER INSERT.
3548	THE FORCE REQUIRED TO MATE CONNECTORS SHALL BE NOT GREATER THAN 3548 NEWTON(S) PER INSERT.
1663	THE FORCE REQUIRED TO UNMATE CONNECTORS SHALL BE NOT GREATER THAN 1663 POUND(S) PER INSERT.
3550	THE FORCE REQUIRED TO UNMATE CONNECTORS SHALL BE NOT GREATER THAN 3550 NEWTON(S) PER INSERT.
1662	THE FORCE REQUIRED TO UNMATE CONNECTORS SHALL BE NOT LESS THAN 1662 POUND(S) PER INSERT.
3552	THE FORCE REQUIRED TO UNMATE CONNECTORS SHALL BE NOT LESS THAN 3552 NEWTON(S) PER INSERT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MATING AND UNMATING FORCES (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM MATING OR UNMATING TORQUE (SELECT ONE)	
(OUNCE-INCHES)	3554
(POUNDS-INCHES)	3556
(NEWTON METERS)	3558
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1652
PER MIL-STD-1344, METHOD 2013.	3560
MATING RATE (SELECT ONE)	
GRADUAL.	3562
(INCHES PER MINUTE)	3564
(MILLIMETERS PER MINUTE)	3566
PREMEASUREMENT MATING AND UNMATING CYCLES (QUANTITY)	3568

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3554	THE TORQUE REQUIRED TO MATE OR UNMATE CONNECTORS SHALL BE NOT GREATER THAN 3554 OUNCE-INCH(S).
3556	THE TORQUE REQUIRED TO MATE OR UNMATE CONNECTORS SHALL BE NOT GREATER THAN 3556 POUND-INCH(S).
3558	THE TORQUE REQUIRED TO MATE OR UNMATE CONNECTORS SHALL BE NOT GREATER THAN 3558 NEWTON METER(S).
1652	MATING AND UNMATING FORCES. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1652.
3560	MATING AND UNMATING FORCES. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2013 OF MIL-STD-1344.
3562	CONNECTORS SHALL BE GRADUALLY MATED AND UNMATED.
3564	CONNECTORS SHALL BE MATED AND UNMATED AT A RATE NOT GREATER THAN 3564 INCH(S) PER MINUTE.
3566	CONNECTORS SHALL BE MATED AND UNMATED AT A RATE NOT GREATER THAN 3566 MILLIMETER(S) PER MINUTE.
3568	PRIOR TO MEASUREMENTS CONNECTORS SHALL BE MATED AND UNMATED 3568 TIMES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OVERSIZE PIN EXCLUSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2264
NO ENTRY OF TEST PIN.	3570
MEET CONTACT RESISTANCE REQUIREMENT.	2266
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2258
POSITION STEEL PIN.	3571
APPLIED FORCE (SELECT ONE)	
(POUNDS)	3572
(NEWTONS)	3574
PIN DIAMETER (SELECT ONE)	
SINGLE CONTACT SIZE (SELECT ONE)	
(INCH)	2259
(MILLIMETERS)	3576

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2264	OVERSIZE PIN EXCLUSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2264.
3570	OVERSIZE PIN EXCLUSION. THE SOCKETS SHALL EXCLUDE THE ENTRY OF THE TEST PIN.
2266	THE CONTACTS SHALL MEET CONTACT RESISTANCE REQUIREMENT AFTER TEST.
2258	OVERSIZE PIN EXCLUSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2258.
3571	OVERSIZE PIN EXCLUSION. TESTING SHALL BE PERFORMED WITH A HARDENED STEEL PIN PLACED IN A POSITION TO ENTER THE SOCKET BORE.
3572	AN AXIAL FORCE OF 3572 POUND(S) SHALL BE APPLIED TENDING TO FORCE THE PIN INTO THE SOCKET.
3574	AN AXIAL FORCE OF 3574 NEWTON(S) SHALL BE APPLIED TENDING TO FORCE THE PIN INTO THE SOCKET.
2259	PIN OUTSIDE DIAMETER SHALL BE 2259 INCH.
3576	PIN OUTSIDE DIAMETER SHALL BE 3576 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OVERSIZE PIN EXCLUSION (CONT)	
PIN DIAMETER (CONT)	
TWO CONTACT SIZES (SELECT ONE)	
U.S.	
(INCH)	3578
*CONTACT (SIZE)	3580
(INCH)	3582
*CONTACT (SIZE)	3584
SI	
(MILLIMETERS)	3586
*CONTACT (SIZE)	3588
(MILLIMETERS)	3590
*CONTACT (SIZE)	3592
CONTACTS TESTED (PERCENT)	2262
OZONE EXPOSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1700
NO CRACKING OF DIELECTRIC OR PERFORMANCE DEGRADATION.	1702

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3578 3580	PIN OUTSIDE DIAMETER SHALL BE 3578 INCH FOR SIZE 3580 CONTACTS.
3582 3584	PIN OUTSIDE DIAMETER SHALL BE 3582 INCH FOR SIZE 3584 CONTACTS.
3586 3588	PIN OUTSIDE DIAMETER SHALL BE 3586 MILLIMETER(S) FOR SIZE 3588 CONTACTS.
3590 3592	PIN OUTSIDE DIAMETER SHALL BE 3590 MILLIMETER(S) FOR SIZE 3592 CONTACTS.
2262	TEST SHALL BE PERFORMED ON NOT LESS THAN 2262 PERCENT OF THE SOCKET CONTACTS.
1700	OZONE EXPOSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1700.
1702	OZONE EXPOSURE. THE CONNECTOR SHALL SHOW NO EVIDENCE OF CRACKING OF DIELECTRIC MATERIAL OR OTHER DAMAGE DUE TO OZONE EXPOSURE THAT WILL ADVERSELY AFFECT PERFORMANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OZONE EXPOSURE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1694
PER MIL-STD-1344, METHOD 1007.	3594
OZONE CONCENTRATION BY VOLUME	
MINIMUM (PARTS PER MILLION)	3596
MAXIMUM (PARTS PER MILLION)	3598
EXPOSURE DURATION (HOURS)	1696
CHAMBER TEMPERATURE (DEGREES CELSIUS)	3600
TOLERANCE (DEGREES CELSIUS)	3602
PROBE DAMAGE (CONTACTS)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3024
MINIMUM CONTACT SEPARATION FORCE (POUNDS)	3026
MINIMUM CONTACT SEPARATION FORCE (NEWTONS)	3604
MEET CONTACT RESISTANCE REQUIREMENTS.	3606

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1694	OZONE EXPOSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1694.
3594	OZONE EXPOSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1007 OF MIL-STD-1344.
3596	OZONE CONCENTRATION SHALL BE NOT LESS THAN 3596 PARTS PER MILLION BY VOLUME.
3598	OZONE CONCENTRATION SHALL BE NOT GREATER THAN 3598 PARTS PER MILLION BY VOLUME.
1696	EXPOSURE DURATION SHALL BE 1696 HOUR(S).
3600	CHAMBER TEMPERATURE SHALL BE 3600 DEGREES CELSIUS.
3602	CHAMBER TEMPERATURE TOLERANCE SHALL BE 3602 DEGREES CELSIUS.
3024	PROBE DAMAGE (CONTACTS). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3024.
3026	PROBE DAMAGE (CONTACTS). THE CONTACT SEPARATION FORCE AFTER TEST SHALL BE NOT LESS THAN 3026 POUND(S).
3604	PROBE DAMAGE (CONTACTS). THE CONTACT SEPARATION FORCE AFTER TEST SHALL BE NOT LESS THAN 3604 NEWTON(S).
3606	CONTACTS SHALL MEET CONTACT RESISTANCE REQUIREMENT(S) AFTER TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PROBE DAMAGE (CONTACTS) (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3010
PER MIL-STD-1344, METHOD 2006.	3608
HOLDING DEVICE (SELECT ONE)	
COLLET.	3021
CONNECTOR.	3020
PROBE DEPTH (SELECT ONE)	
ONE HALF SOCKET BORE.	3610
THREE QUARTERS SOCKET BORE.	3611
HALF AND THREE QUARTERS SOCKET BORE.	3018
SOCKETS TESTED (QUANTITY)	3012
SALT SPRAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4878

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3010	PROBE DAMAGE (CONTACTS). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3010.
3608	PROBE DAMAGE (CONTACTS). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2006 OF MIL-STD-1344.
3021	COLLET TYPE CONTACT HOLDING DEVICE SHALL BE USED.
3020	A CONNECTOR SHALL BE USED TO RETAIN THE SOCKET CONTACT(S).
3610	PROBE DEPTH SHALL BE ONE HALF OF SOCKET BORE NOMINAL DEPTH.
3611	PROBE DEPTH SHALL BE THREE QUARTERS OF SOCKET BORE NOMINAL DEPTH.
3018	PROBE DEPTHS SHALL BE ONE HALF AND THREE QUARTERS OF SOCKET BORE NOMINAL DEPTH.
3012	THERE SHALL BE 3012 SOCKETS TESTED.
4878	SALT SPRAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4878.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT SPRAY (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF EXCESSIVE CORROSION, WARPING OR CRACKING.	3612
NO INCREASE IN FORCE TO ENGAGE AND DISENGAGE.	3613
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4770
PER MIL-STD-1344, METHOD 1001.	3614
*TEST CONDITION (LETTER)	4772
MOUNTING (SELECT ONE)	
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4773
MOUNTING SHALL BE BY NORMAL METHOD.	4765
MOUNTING SHALL BE BY ANY SUITABLE METHOD.	4766

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3612	SALT SPRAY. THERE SHALL BE NO EVIDENCE OF EXCESSIVE CORROSION. EXCESSIVE CORROSION IS DEFINED AS THAT WHICH INTERFERES WITH THE ELECTRICAL OR MECHANICAL PERFORMANCE, OR, IN THE CASE OF PLATED METAL, CORROSION WHICH HAS PASSED THROUGH THE PLATING AND ATTACKED THE BASE METAL. THERE SHALL BE NO WARPING, CRACKING OR OTHER DAMAGE.
3613	THERE SHALL BE NO INCREASE IN FORCE REQUIRED TO ENGAGE AND DISENGAGE MATING CONNECTORS.
4770	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4770.
3614	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1001 OF MIL-STD-1344.
4772	TEST CONDITION LETTER 4772 SHALL APPLY.
4773	MOUNTING SHALL BE IN ACCORDANCE WITH 4773.
4765	MOUNTING SHALL BE BY THE NORMAL METHOD.
4766	MOUNTING SHALL BE BY ANY SUITABLE METHOD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (AIR LEAKAGE)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3616
NO BUBBLES INDICATIVE OF LEAKAGE.	3618
MAXIMUM LEAKAGE RATE (ATM CC/SEC)	3620
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3622
PER MIL-STD-1344, METHOD 1008.	3624
PRESSURE DIFFERENTIAL (STANDARD ATMOSPHERES)	3626
ORIENTATION (SELECT ONE)	
REAR FACE, LOW PRESSURE SIDE.	3628
FRONT FACE, LOW PRESSURE SIDE.	3630
REVERSE TESTING REQUIRED.	3632
SHOCK, HIGH IMPACT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1494

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3616	SEAL (AIR LEAKAGE). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3616.
3618	SEAL (AIR LEAKAGE). THERE SHALL BE NO VISIBLE BUBBLES INDICATIVE OF LEAKAGE.
3620	SEAL (AIR LEAKAGE). THE LEAKAGE RATE SHALL BE NOT GREATER THAN 3620 STD ATM CC/SEC.
3622	SEAL (AIR LEAKAGE). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3622.
3624	SEAL (AIR LEAKAGE). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1008 OF MIL-STD-1344.
3626	THE PRESSURE DIFFERENTIAL SHALL BE NOT LESS THAN 3626 STANDARD ATMOSPHERE(S).
3628	THE REAR FACE OF THE CONNECTOR SHALL EXTEND INTO THE LOW PRESSURE SIDE OF THE CHAMBER.
3630	THE FRONT FACE OF THE CONNECTOR SHALL EXTEND INTO THE LOW PRESSURE SIDE OF THE CHAMBER.
3632	REVERSE TESTING SHALL BE REQUIRED.
1494	SHOCK, HIGH IMPACT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1494.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, HIGH IMPACT (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE.	1495
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY DURING TEST.	1451
MAXIMUM DISCONTINUITY (MICROSECONDS)	3634
NO DISENGAGEMENT OR LOOSENING OF COUPLING.	3635
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1486
PER MIL-STD-202, METHOD 207.	1482
*MOUNTING FIXTURE (SELECT ONE)	
FIGURE NUMBER FROM METHOD 207 OF MIL-STD-202 (NUMBER)	1488
ANY SUITABLE MOUNTING FIXTURE.	1478
MOUNTING FIXTURE PER DOCUMENT (DOC DES)	1468

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1495	SHOCK, HIGH IMPACT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1451	THERE SHALL BE NO DISCONTINUITY DURING THE TEST.
3634	THERE SHALL BE NO DISCONTINUITY GREATER THAN 3634 MICROSECOND(S).
3635	THERE SHALL BE NO DISENGAGEMENT OR LOOSENING OF THE CONNECTOR COUPLING.
1486	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1486.
1482	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 207 OF MIL-STD-202.
1488	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH FIGURE 1488 OF METHOD 207 OF MIL-STD-202.
1478	THE MOUNTING FIXTURE SHALL BE ANY SUITABLE MOUNTING FIXTURE.
1468	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH 1468.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, HIGH IMPACT (CONT)	
PER MIL-STD-202, METHOD 207. (CONT)	
SPECIMEN (SELECT ONE)	
WIRED, MATED PAIR.	3636
WIRED, UNMATED CONNECTOR.	3637
MAXIMUM LOAD (MILLIAMPERES)	3638
SHOCK, SPECIFIED PULSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1508
NO EVIDENCE OF PHYSICAL DAMAGE.	1509
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY DURING TEST.	1471
MAXIMUM (MILLISECONDS)	3639
MAXIMUM (MICROSECONDS)	3640
NO DISENGAGEMENT OR LOOSENING OF COUPLING.	3642
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1502

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3636	*TEST SPECIMEN SHALL BE A WIRED CONNECTOR MATED PAIR.*
3637	TEST SPECIMEN SHALL BE A WIRED, UNMATED CONNECTOR.
3638	ELECTRICAL LOAD SHALL BE A CURRENT NOT GREATER THAN 3638 MILLIAMPERE(S).
1508	SHOCK, SPECIFIED PULSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1508.
1509	SHOCK, SPECIFIED PULSE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1471	THERE SHALL BE NO DISCONTINUITY DURING THE TEST.
3639	DISCONTINUITY DURING TEST SHALL BE NOT GREATER THAN 3639 MILLISECOND(S).
3640	DISCONTINUITY DURING TEST SHALL BE NOT GREATER THAN 3640 MICROSECOND(S).
3642	THERE SHALL BE NO DISENGAGEMENT OR LOOSENING OF THE CONNECTOR COUPLING.
1502	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1502.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, SPECIFIED PULSE (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-1344, METHOD 2004.	3644
*TEST CONDITION (LETTER)	1504
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	4686
NORMAL MOUNTING MEANS.	4685
MOUNT PER DOCUMENT (DOC DES)	4684
SPECIMEN (SELECT ONE)	
WIRED, MATED PAIR.	3646
WIRED, UNMATED CONNECTOR.	3648
MAXIMUM LOAD (MILLIAMPERES)	3650
SOLDERABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4674
NO EVIDENCE OF PHYSICAL DAMAGE.	4675
MEET EVALUATION CRITERIA SPECIFIED IN METHOD 208 OF MIL-STD-202.	4672

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3644	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2004 OF MIL-STD-1344.
1504	TEST CONDITION LETTER 1504 SHALL APPLY.
4686	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4685	MOUNTING SHALL BE BY THE NORMAL METHOD.
4684	MOUNTING SHALL BE IN ACCORDANCE WITH 4684.
3646	TEST SPECIMEN SHALL BE A WIRED CONNECTOR MATED PAIR.
3648	TEST SPECIMEN SHALL BE A WIRED UNMATED CONNECTOR.
3650	ELECTRICAL LOAD SHALL BE A CURRENT NOT GREATER THAN 3650 MILLIAMPERE(S).
4674	SOLDERABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4674.
4675	SOLDERABILITY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4672	THE RESULTS OF THE SOLDERABILITY TEST SHALL BE IN ACCORDANCE WITH THE ACCEPTANCE CRITERIA OF METHOD 208 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SOLDERABILITY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4662
PER MIL-STD-202, METHOD 208.	4683
NUMBER OF TERMINALS TO BE TESTED (QUANTITY)	4666
DEPTH OF IMMERSION (SELECT ONE)	
(INCHES)	4667
(MILLIMETERS)	4663
DISTANCE WRAP WIRE APPLIED FROM BODY (SELECT ONE)	
(INCHES)	4664
(MILLIMETERS)	4665
SPECIAL PREPARATIONS PERMITTED.	6205
TEMPERATURE CYCLING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3652

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4662 SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4662.

4683 SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 208 OF MIL-STD-202.

4666 4666 TERMINATION(S) PER UNIT SHALL BE TESTED.

4667 TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4667 INCH(S).

4663 TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4663 MILLIMETER(S).

4664 THE WRAP WIRE SHALL BE 4664 INCH(S) FROM THE BODY.

4665 THE WRAP WIRE SHALL BE 4665 MILLIMETER(S) FROM THE BODY.

6205 SPECIAL PREPARATION SHALL BE PERMITTED.

3652 TEMPERATURE CYCLING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3652.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE CYCLING (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE, CRACKING OR OTHER DAMAGE.	3654
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	3656
(MILLIVOLTS)	3658
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3660
PER MIL-STD-1344, METHOD 1003.	3662
*TEST CONDITION (LETTER)	4715
NUMBER OF CYCLES (QUANTITY)	3664
STEP 1 TEMPERATURE (DEGREES CELSIUS)	3666
PLUS TOLERANCE (DEGREES CELSIUS)	3668
MINUS TOLERANCE (DEGREES CELSIUS)	3670

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3654	TEMPERATURE CYCLING. THERE SHALL BE NO EVIDENCE OF CRACKING, FRACTURE, OR OTHER DAMAGE DETRIMENTAL TO THE OPERATION OF THE CONNECTOR.
3656	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 3656 OHM(S).
3658	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 3658 MILLIVOLT(S) DROP.
3660	TEMPERATURE CYCLING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3660.
3662	TEMPERATURE CYCLING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1003 OF MIL-STD-1344.
4715	TEST CONDITION LETTER 4715 SHALL APPLY.
3664	THE NUMBER OF CYCLES SHALL BE 3664.
3666	THE STEP 1 TEMPERATURE SHALL BE 3666 DEGREES CELSIUS.
3668	THE STEP 1 POSITIVE TEMPERATURE TOLERANCE SHALL BE 3668 DEGREES CELSIUS.
3670	THE STEP 1 NEGATIVE TEMPERATURE TOLERANCE SHALL BE 3670 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE CYCLING (CONT)	
PER MIL-STD-1344, METHOD 1003. (CONT)	
STEP 3 TEMPERATURE (DEGREES CELSIUS)	3672
PLUS TOLERANCE (DEGREES CELSIUS)	3674
MINUS TOLERANCE (DEGREES CELSIUS)	3676
MINIMUM EXPOSURE DURATIONS (SELECT ONE)	
(HOURS)	3678
(MINUTES)	3680
SPECIMEN (SELECT ONE)	
WIRED, MATED PAIR.	3682
WIRED, UNMATED CONNECTOR.	3684
TEMPERATURE LIFE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3082
NO CRACKING, FRACTURE OR OTHER DAMAGE.	3686

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3672	THE STEP 3 TEMPERATURE SHALL BE 3672 DEGREES CELSIUS.
3674	THE STEP 3 POSITIVE TEMPERATURE TOLERANCE SHALL BE 3674 DEGREES CELSIUS.
3676	THE STEP 3 NEGATIVE TEMPERATURE TOLERANCE SHALL BE 3676 DEGREES CELSIUS.
3678	THE STEPS 1 AND 3 EXPOSURE DURATIONS SHALL BE NOT LESS THAN 3678 HOUR(S).
3680	THE STEPS 1 AND 3 EXPOSURE DURATIONS SHALL BE NOT LESS THAN 3680 MINUTE(S).
3682	TEST SPECIMEN SHALL BE A WIRED CONNECTOR MATED PAIR.
3684	TEST SPECIMEN SHALL BE A WIRED, UNMATED CONNECTOR.
3082	TEMPERATURE LIFE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3082.
3686	TEMPERATURE LIFE. THERE SHALL BE NO EVIDENCE OF CRACKING, FRACTURE, OR OTHER DAMAGE DETRIMENTAL TO THE OPERATION OF THE CONNECTOR.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE LIFE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3058
PER MIL-STD-1344, METHOD 1005.	3688
TEST CONDITION (NUMBER)	3060
LENGTH OF TEST CONDITION (LETTER)	3064
ELECTRICAL LOAD ____	3066
CONTACT RETENTION AXIAL LOAD (PERCENT)	3690
SEALING PLUGS (PERCENT OF CONTACTS)	3076
VIBRATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4681

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3058	TEMPERATURE LIFE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3058.
3688	TEMPERATURE LIFE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1005 OF MIL-STD-1344.
3060	THE TEST CONDITION NUMBER SHALL BE 3060.
3064	THE LENGTH OF TEST CONDITION LETTER SHALL BE 3064.
3066	THE ELECTRICAL LOAD CONDITIONS SHALL BE 3066.
3690	TEST SHALL BE PERFORMED WITH 3690 PERCENT OF THE CONTACT RETENTION AXIAL LOAD APPLIED TO THE CONTACTS.
3076	SEALING PLUGS SHALL BE INSTALLED IN 3076 PERCENT OF CONTACT CAVITIES.
4681	VIBRATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4681.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE.	4682
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY.	1374
MAXIMUM DISCONTINUITY (SELECT ONE)	
(MILLISECONDS)	1545
(MICROSECONDS)	1546
NO LOOSENING OF HARDWARE.	3692
NO UNMATING.	3694
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1505
PER MIL-STD-1344, METHOD 2005.	3696
TEST CONDITION NUMBER I.	3698
DURATION EACH DIRECTION (HOURS)	3700
TEST CONDITION NUMBER II.	3702
TEST CONDITION NUMBER III.	3704

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4682	VIBRATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1374	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1545	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1545 MILLISECOND(S).
1546	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1546 MICROSECOND(S).
3692	THERE SHALL BE NO LOOSENING OF HARDWARE.
3694	THERE SHALL BE NO UNINTENDED UNMATING OF CONNECTORS.
1505	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1505.
3696	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2005 OF MIL-STD-1344.
3698	TEST CONDITION NUMBER I SHALL APPLY.
3700	DURATION OF VIBRATION IN EACH DIRECTION SHALL BE 3700 HOUR(S).
3702	TEST CONDITION NUMBER II SHALL APPLY.
3704	TEST CONDITION NUMBER III SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION (CONT)	
PER MIL-STD-1344, METHOD 2005. (CONT)	
TEST CONDITION NUMBER IV.	3706
TEST CONDITION NUMBER V.	3708
TEST CONDITION (LETTER)	3710
MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	3714
PER (DOC DES)	3716
DURATION PER AXIS (SELECT ONE)	
3 MINUTES.	3718
15 MINUTES.	3720
1.5 HOURS.	3722
8 HOURS.	3724
DIRECTION OF MOTION (SELECT ONE)	
PERPENDICULAR TO MATING PLANE.	3726
THREE MUTUALLY PERPENDICULAR.	3728
NUMBER OF TEST POINTS (QUANTITY)	3730
TEST POINTS ____	3732

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3706	TEST CONDITION NUMBER IV SHALL APPLY.
3708	TEST CONDITION NUMBER V SHALL APPLY.
3710	TEST CONDITION LETTER 3710 SHALL APPLY.
3714	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
3716	MOUNTING SHALL BE IN ACCORDANCE WITH 3716.
3718	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 3 MINUTES.
3720	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 15 MINUTES.
3722	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 1.5 HOURS.
3724	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 8 HOURS.
3726	THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE MATING PLANE OF THE CONNECTOR(S) IN NORMAL MOUNTING POSITION.
3728	THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUALLY PERPENDICULAR PLANES.
3730	THERE SHALL BE 3730 TEST POINT(S).
3732	TEST POINT(S) SHALL BE 3732.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION (CONT)	
PER MIL-STD-1344, METHOD 2005. (CONT)	
TEST CONDITION VI.	3733
TEST CONDITION (LETTER)	3734
MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	3736
PER (DOC DES)	3738
DURATION PER AXIS (SELECT ONE)	
3 MINUTES.	374C
15 MINUTES.	3742
1.5 HOURS.	3744
8 HOURS.	3746
DIRECTION OF MOTION (SELECT ONE)	
PERPENDICULAR TO MATING PLANE.	3748
THREE MUTUALLY PERPENDICULAR.	3750
NUMBER OF TEST POINTS (QUANTITY)	3752
TEST POINTS ____	3754

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
3733	TEST CONDITION NUMBER VI SHALL APPLY.
3734	TEST CONDITION LETTER 3734 SHALL APPLY.
3736	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
3738	MOUNTING SHALL BE IN ACCORDANCE WITH 3738.
3740	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 3 MINUTES.
3742	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 15 MINUTES.
3744	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 1.5 HOURS.
3746	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 8 HOURS.
3748	THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE MATING PLANE OF THE CONNECTOR(S) IN NORMAL MOUNTING POSITION.
3750	THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUALLY PERPENDICULAR PLANES.
3752	THERE SHALL BE 3752 TEST POINT(S).
3754	TEST POINT(S) SHALL BE 3754.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION (CONT)	
PER MIL-STD-1344, METHOD 2005. (CONT)	
SPECIMEN (SELECT ONE)	
WIRED, MATED PAIR.	3756
WIRED, UNMATED CONNECTOR.	3758
ELECTRICAL LOAD (MILLIAMPERES)	3760
MONITOR FOR DISCONTINUITIES.	3762
METHOD FOR DETERMINING RESONANCE ____	3764
STORAGE CONDITIONS	
(YEARS)	1529
CERTIFY MAXIMUM CURE DATE TO DELIVERY (QUARTERS)	4942
CERTIFY MINIMUM SHELF LIFE AFTER DELIVERY (QUARTERS)	4943
CERTIFY MAXIMUM MANUFACTURE DATE TO DELIVERY (QUARTERS)	4944
AGE LIMITATION PER MIL-STD-1523.	5209

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3756	TEST SPECIMEN SHALL BE A WIRED CONNECTOR MATED PAIR.
3758	TEST SPECIMEN SHALL BE A WIRED, UNMATED CONNECTOR.
3760	THE ELECTRICAL LOAD, ALL CONTACTS, SHALL BE NOT GREATER THAN 3760 MILLIAMPERE(S).
3762	CONNECTORS SHALL BE MONITORED FOR DISCONTINUITIES.
3764	THE METHOD FOR DETERMINING RESONANCE SHALL BE 3764.
	STORAGE CONDITIONS.
1529	ITEMS SHALL WITHSTAND 1529 YEARS OF STORAGE WHEN PROPERLY PRESERVED, PACKAGED AND MECHANICALLY PROTECTED WITHOUT REQUIRING MAJOR REPAIR.
4942	MANUFACTURER SHALL CERTIFY THAT THE CURE DATE SHALL BE NOT GREATER THAN 4942 QUARTERS PRIOR TO DELIVERY DATE.
4943	MANUFACTURER SHALL CERTIFY THAT THERE SHALL BE NOT LESS THAN 4943 QUARTERS OF SHELF LIFE AFTER DELIVERY.
4944	MANUFACTURER SHALL CERTIFY THAT THE DATE OF MANUFACTURE SHALL BE NOT GREATER THAN 4944 QUARTERS PRIOR TO DATE OF DELIVERY.
5209	AGE LIMITATIONS OF THE FINISHED PRODUCT SHALL BE IN ACCORDANCE WITH MIL-STD-1523.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI


(Project EDS-A243)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.


APPENDIX A

ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

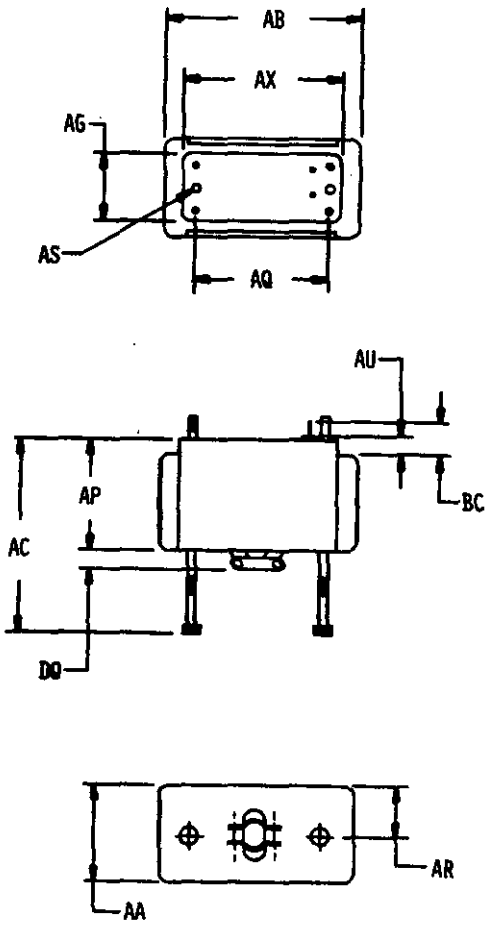


Ø72-Ø1-11

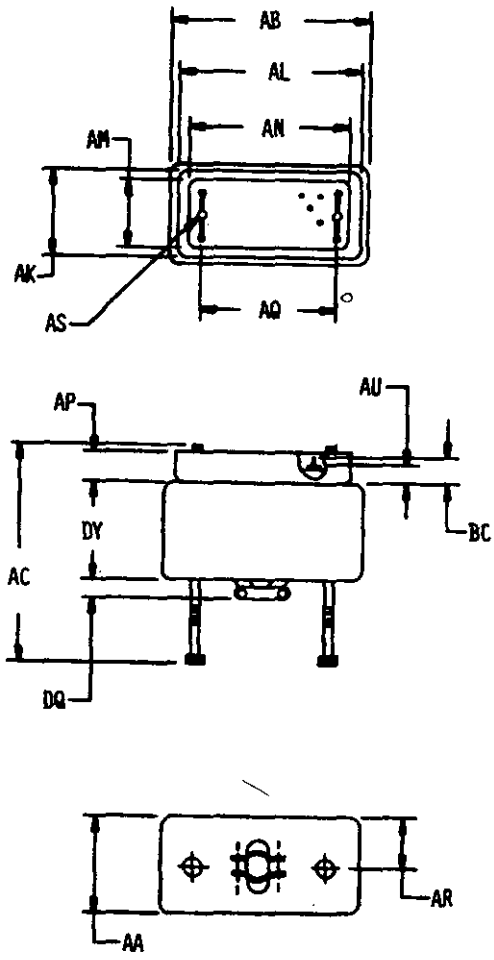


Ø72-Ø1-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

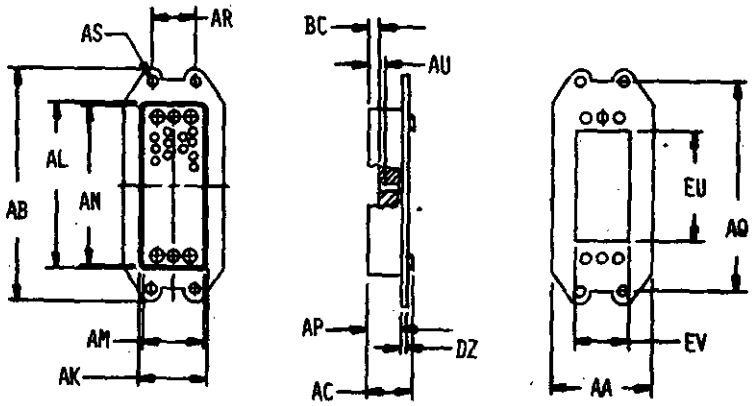


Ø72-Ø1-13

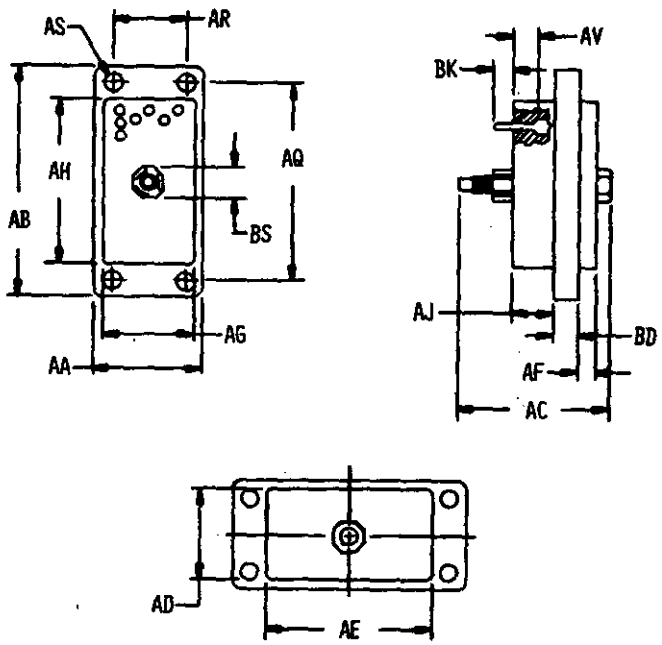


Ø72-Ø1-14

Source: https://assist.dla.mil -- Downloaded: 2026Ø1-26T07:24Z
Check the source to verify that this is the current version before use.

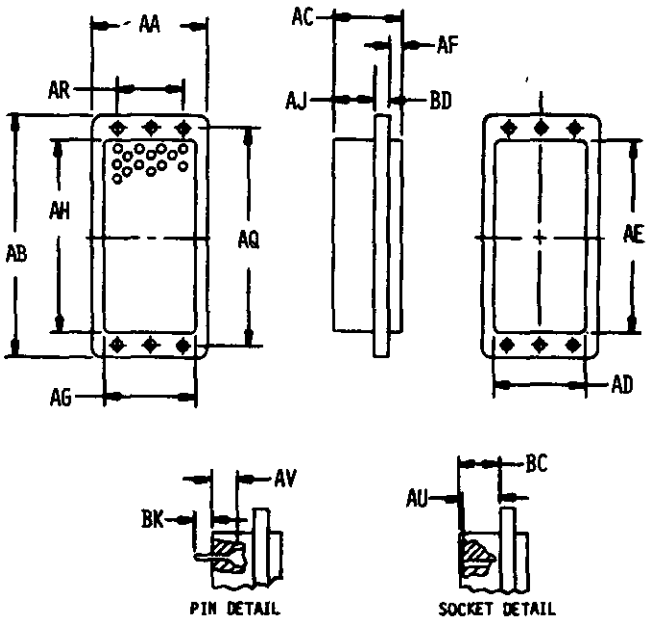


072-01-15

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

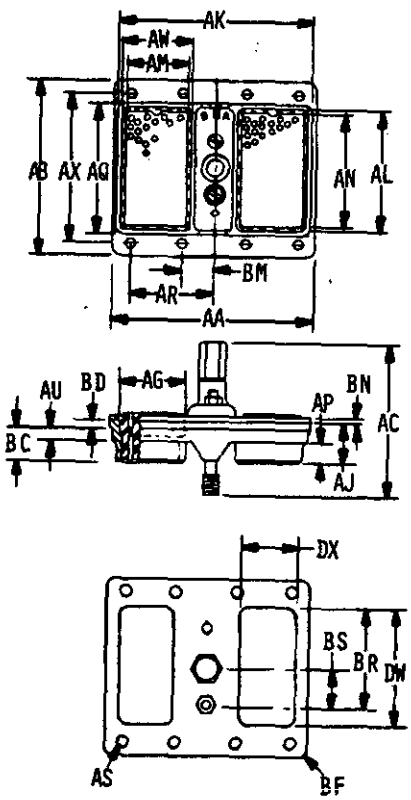


072-01-16

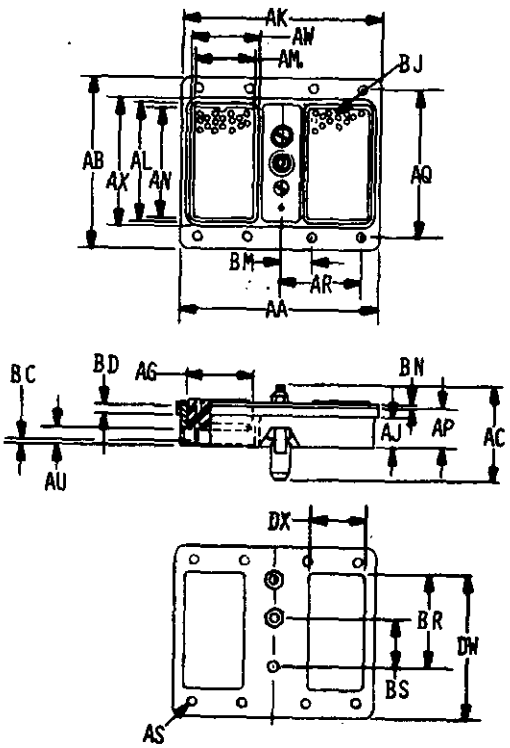


072-01-17


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

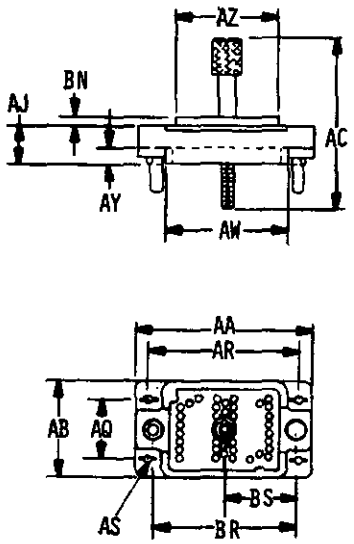


0072-01-18

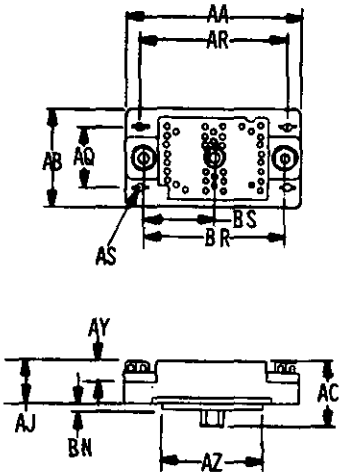

0072-01-19

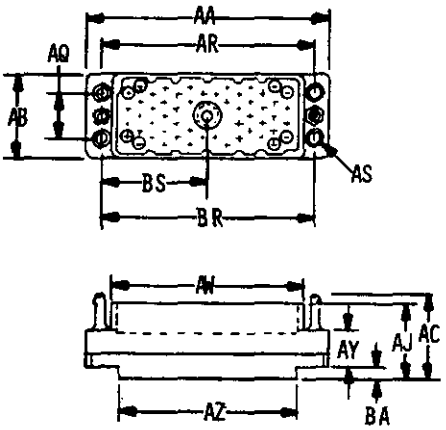


0072-01-20

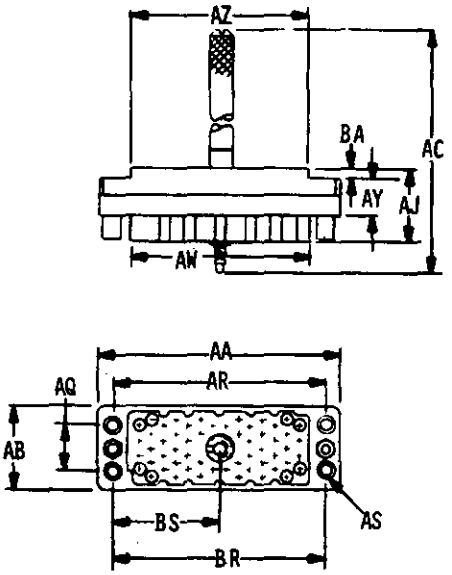


0072-01-21

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

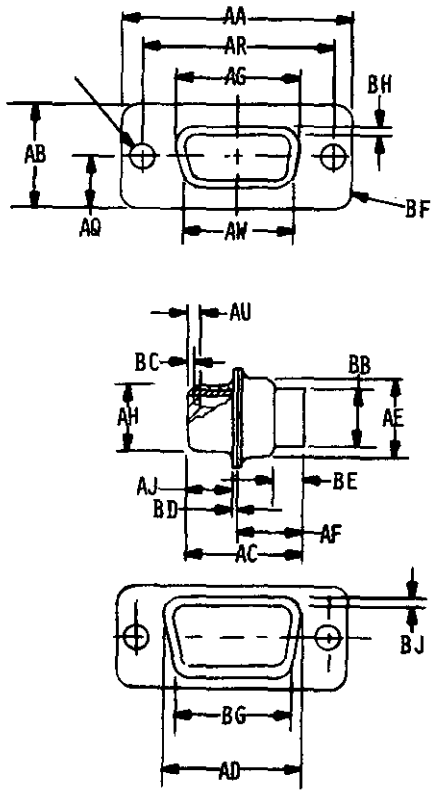


072-01-22

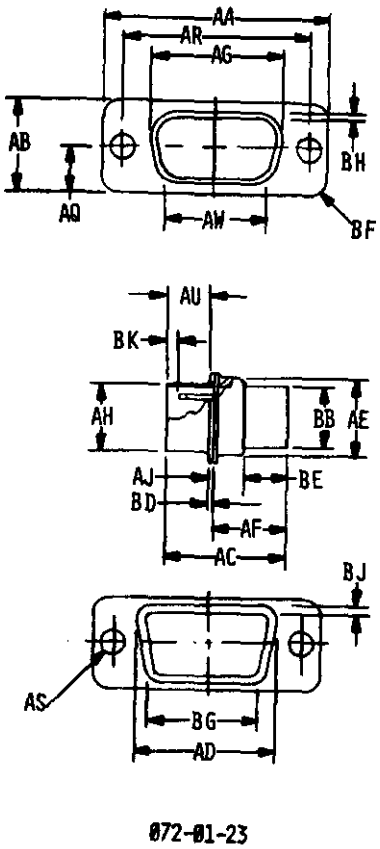


072-01-23

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

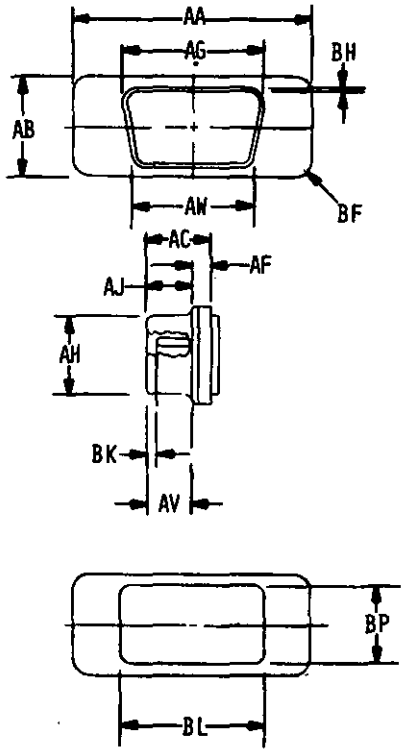


072-01-24

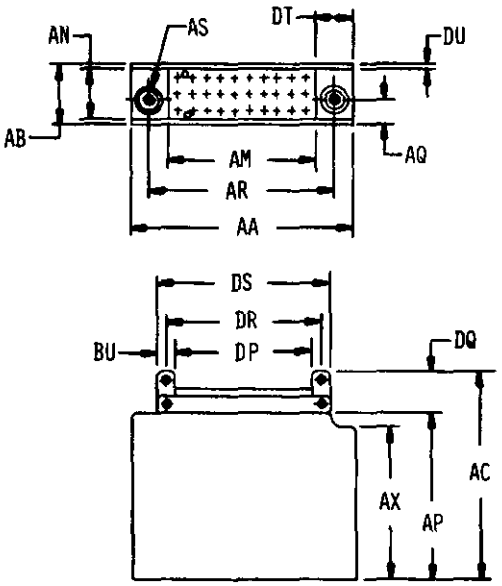

072-01-25


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

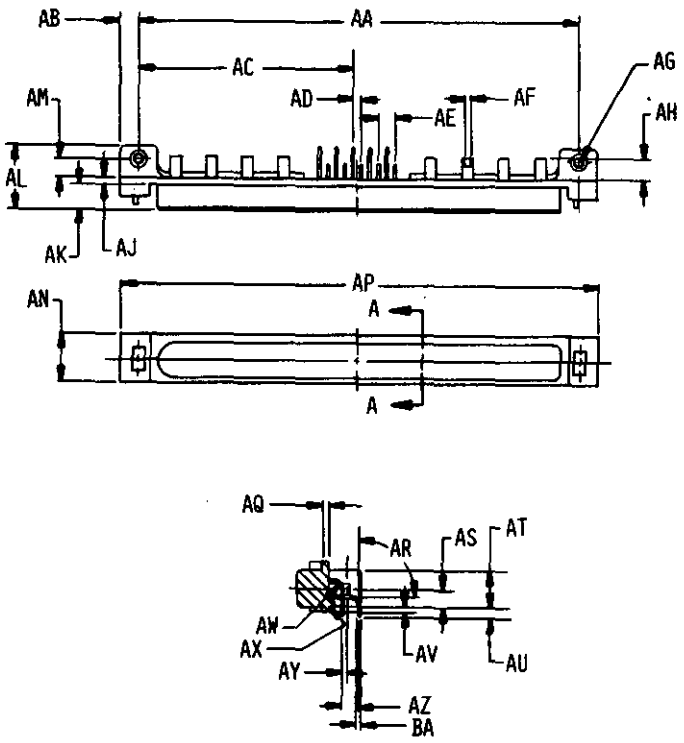


SECTION A-A

072-01-26

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

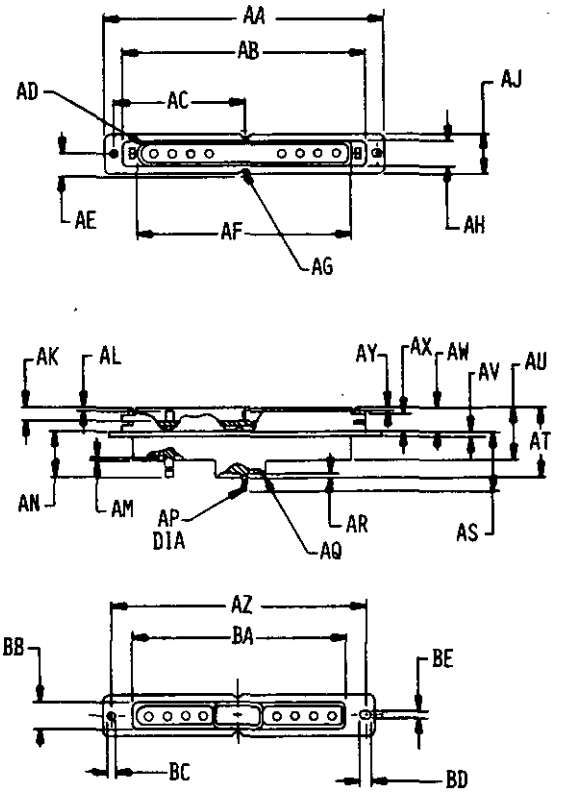


072-01-27

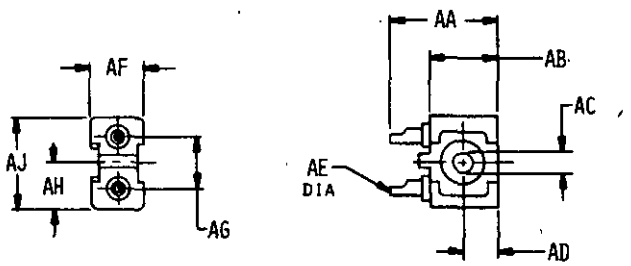


072-01-28


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

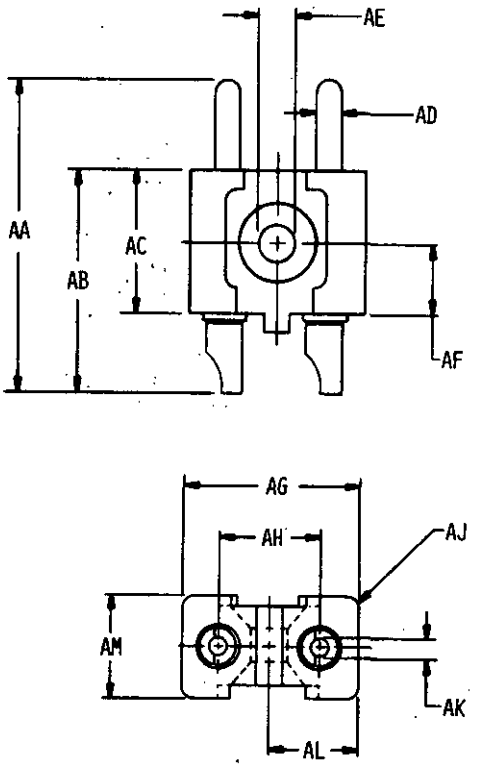

072-01-29

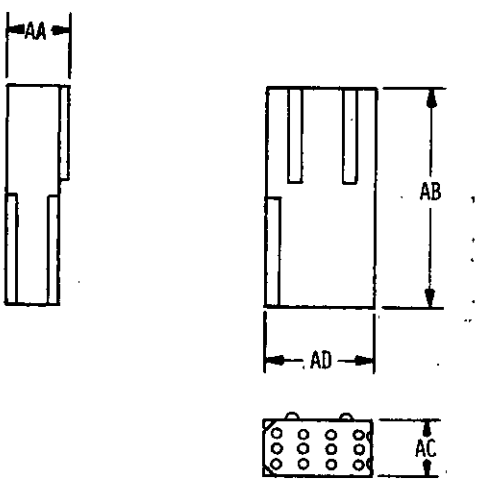


072-01-30

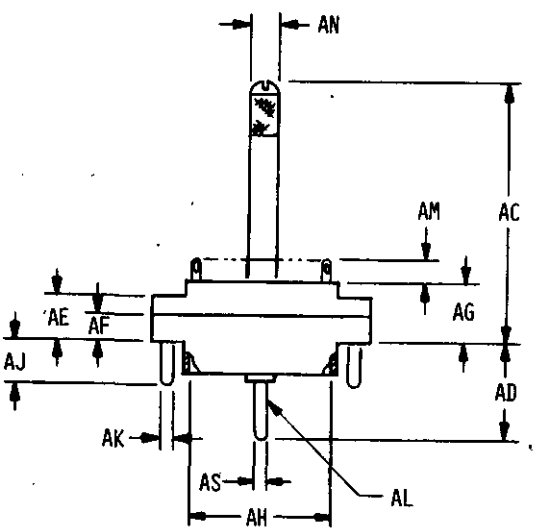



072-01-31

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

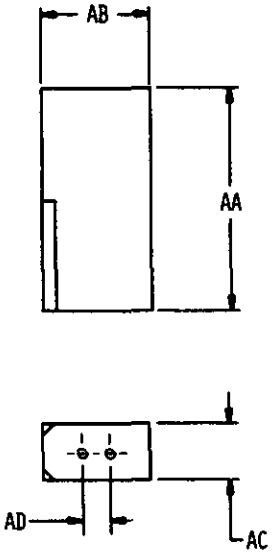


072-01-32

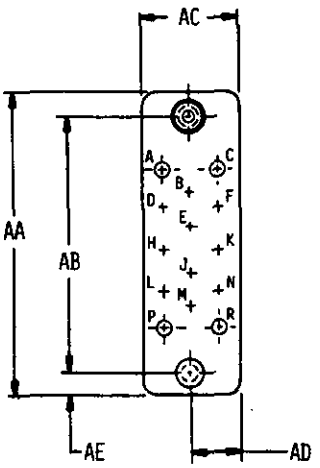

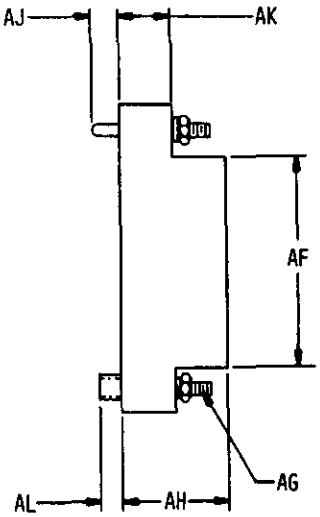


072-01-33

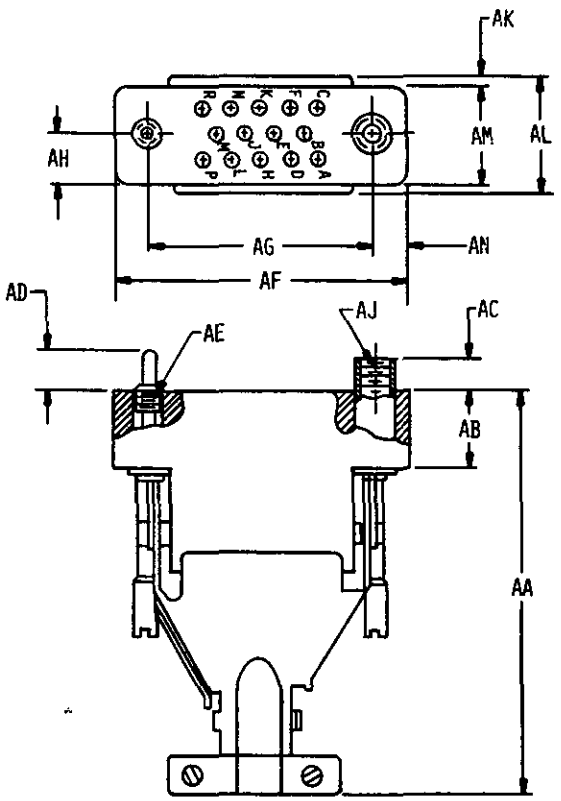


072-01-34

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

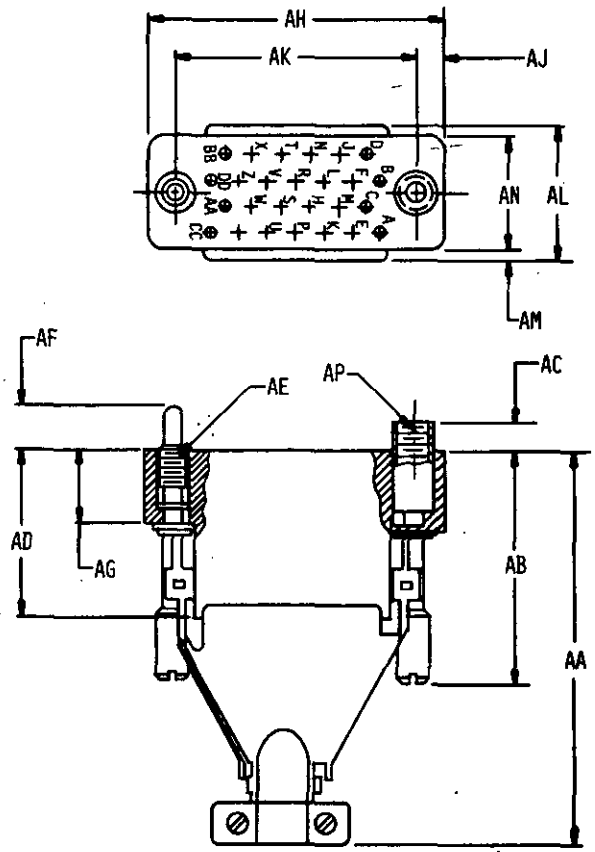


Ø72-Ø1-35

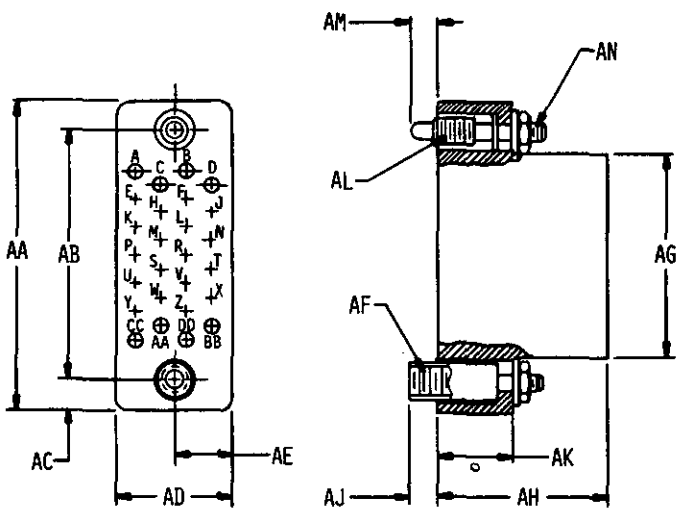


Ø72-Ø1-36

Source: https://assist.dla.mil -- Downloaded: 2026Ø1Ø-26T07:24Z
Check the source to verify that this is the current version before use.

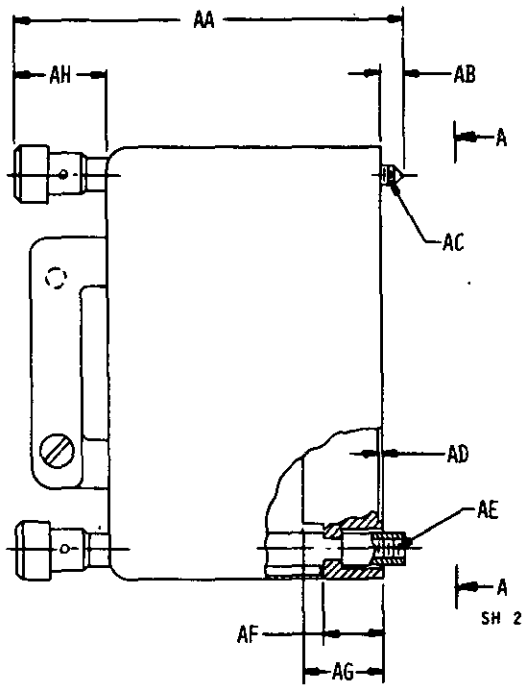


Ø72-Ø1-37
SH 1 OF 2

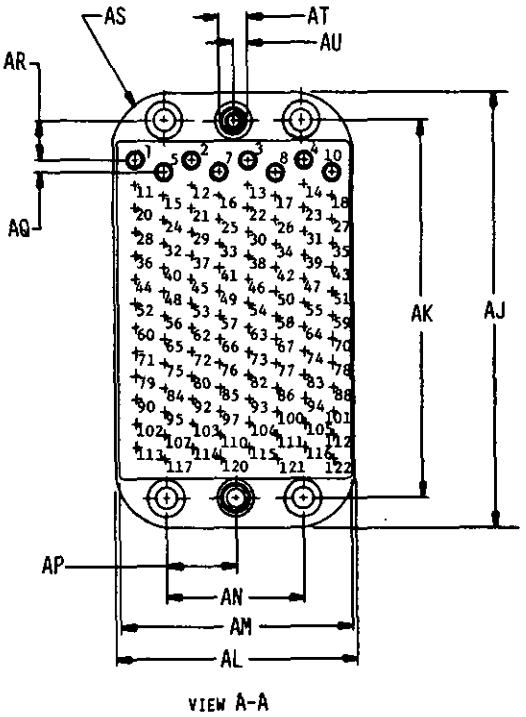


VIEW A-A

Ø72-Ø1-37
SH 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026Ø1Ø-26T07:24Z
Check the source to verify that this is the current version before use.

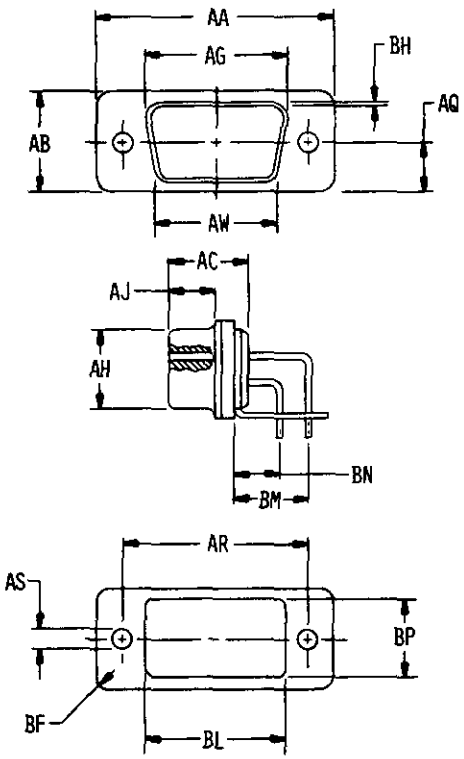


072-01-38

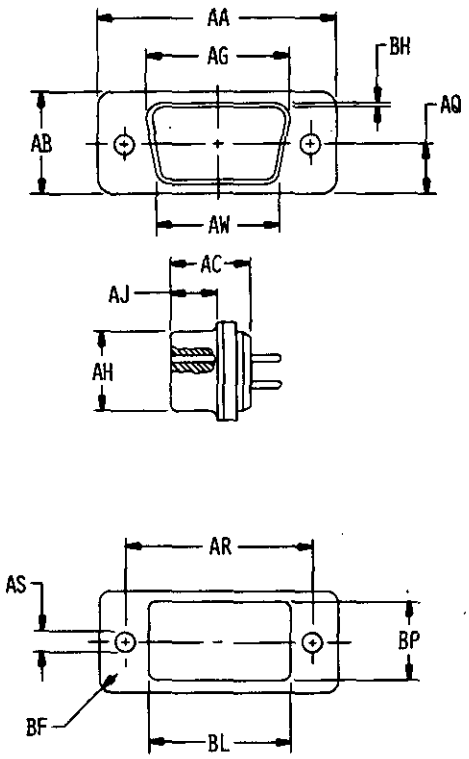


072-01-39

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

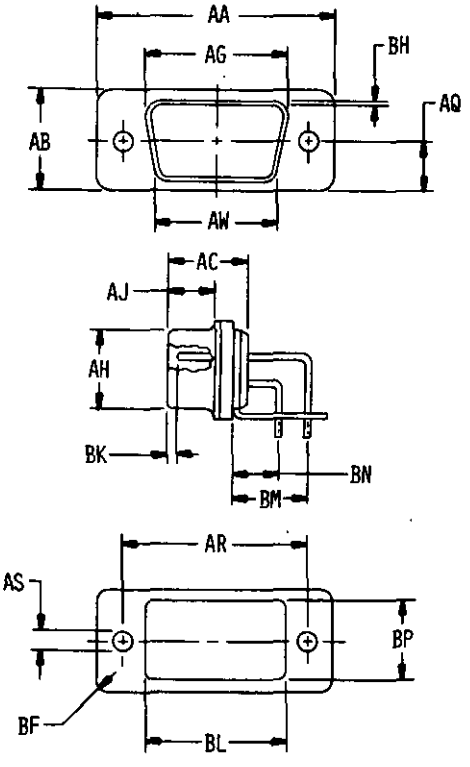


072-01-40

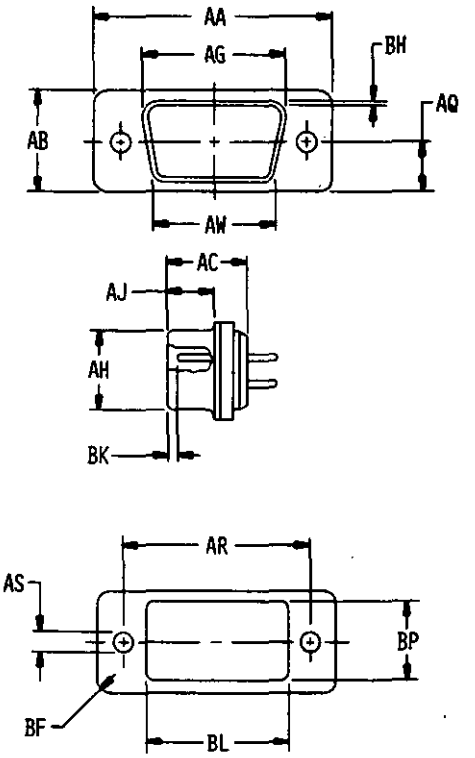



072-01-41

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

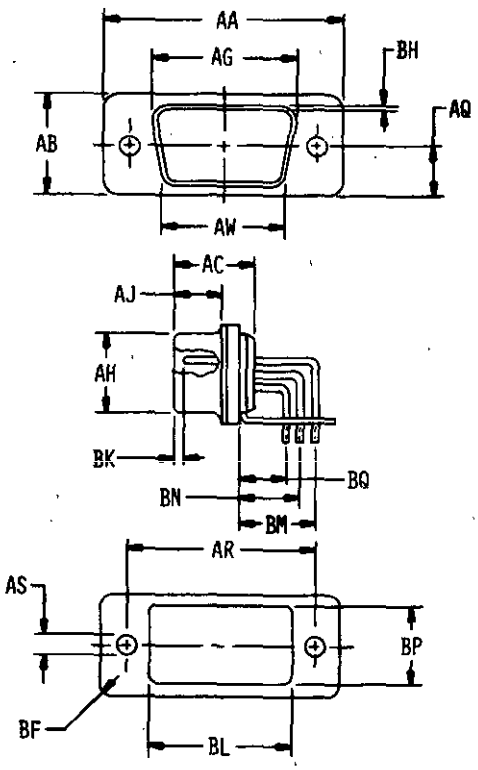

072-01-42

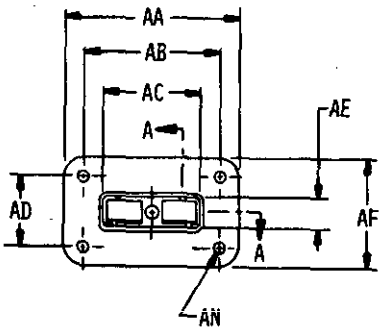

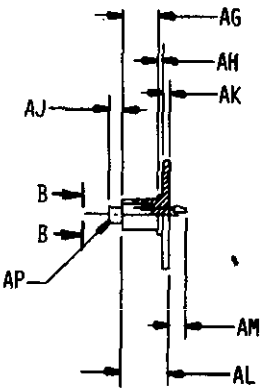


SECTION A-A



VIEW B-B


072-01-43

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

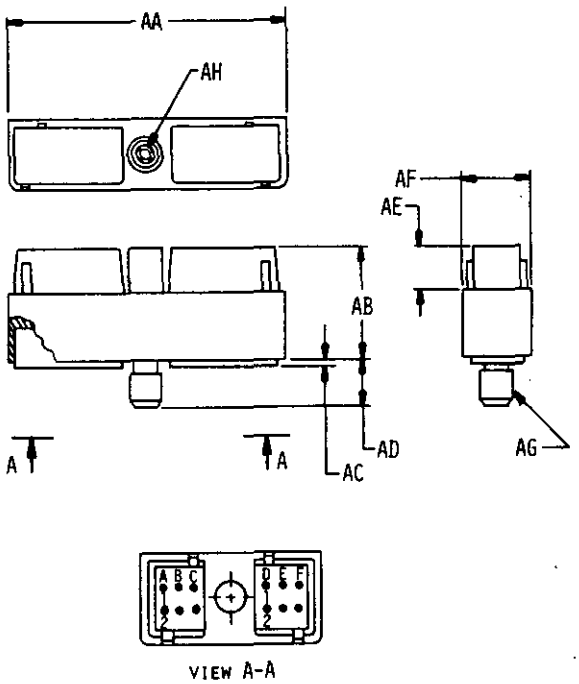


VIEW A-A

072-01-44

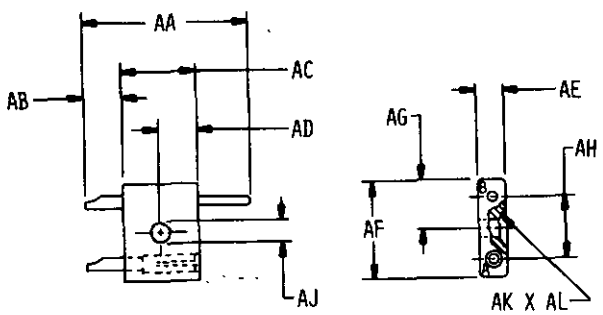


072-01-45

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

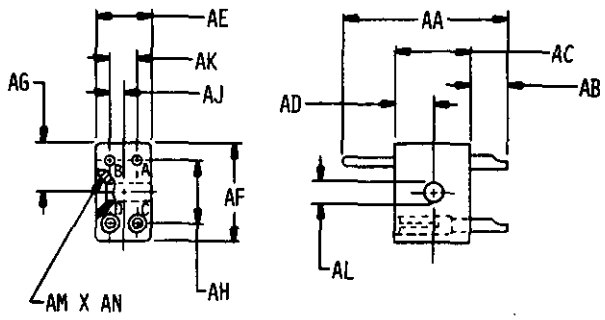


Ø72-Ø1-46

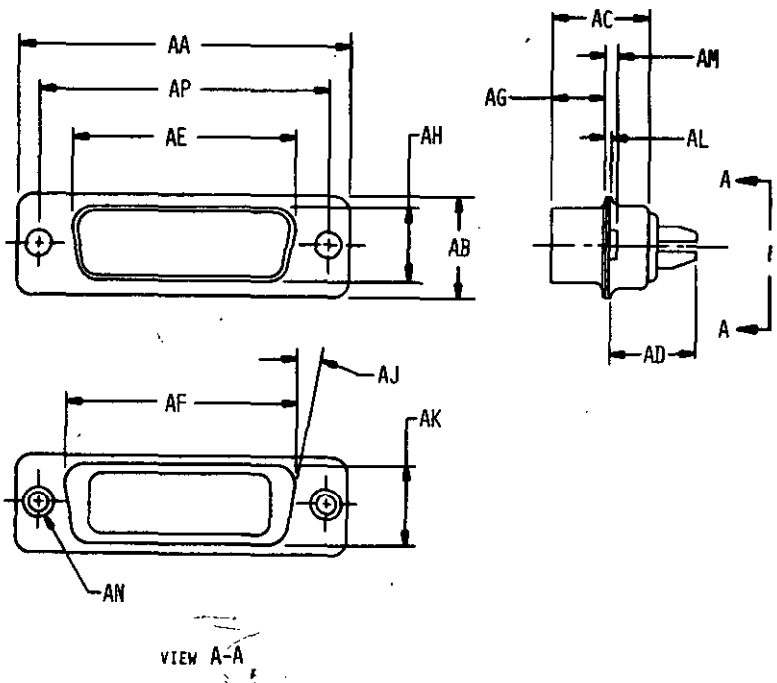


Ø72-Ø1-47

Source: https://assist.dla.mil - Downloaded: 2026Ø-26T07:24Z
Check the source to verify that this is the current version before use.

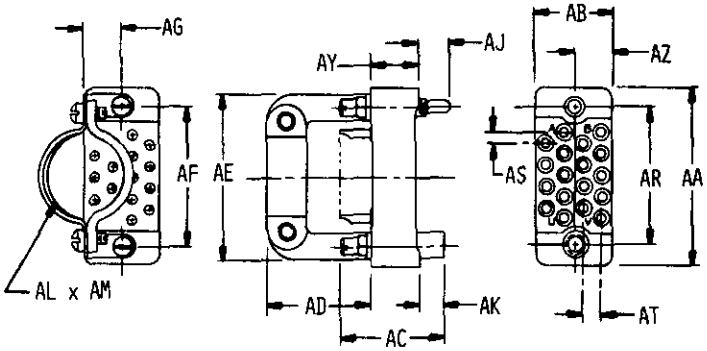


Ø72-Ø1-48

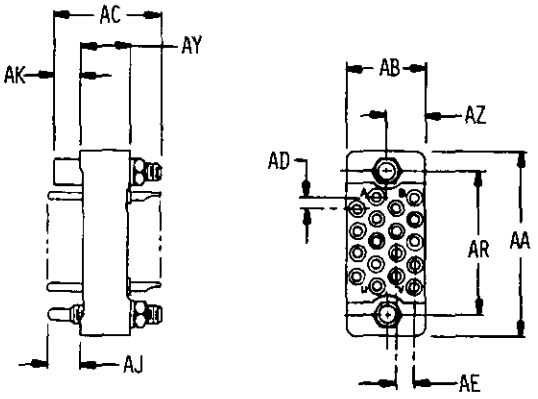


Ø72-Ø1-49

Source: https://assist.dla.mil -- Downloaded: 2026Ø1Ø-26T07:24Z
Check the source to verify that this is the current version before use.

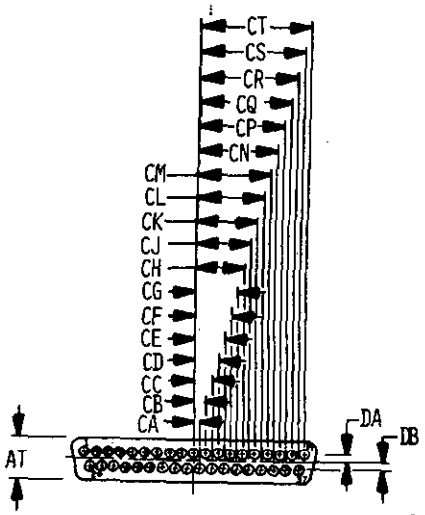


072-02-34

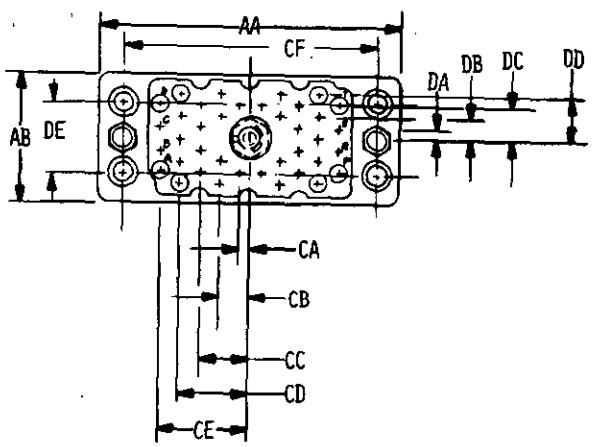


072-02-35

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

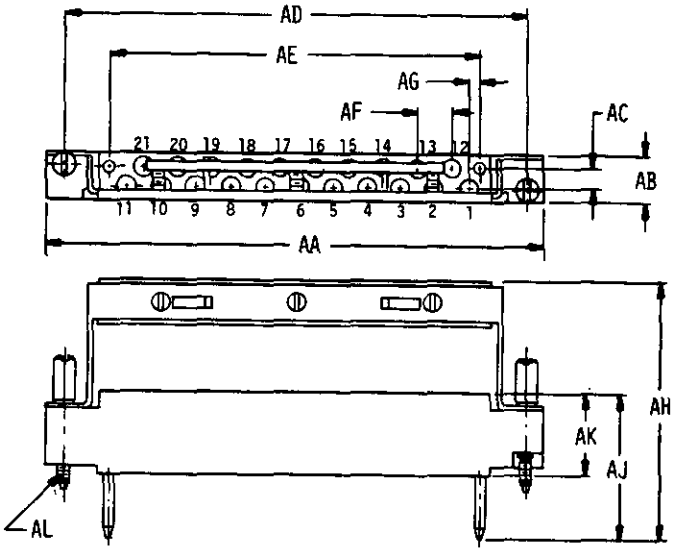


072-02-81

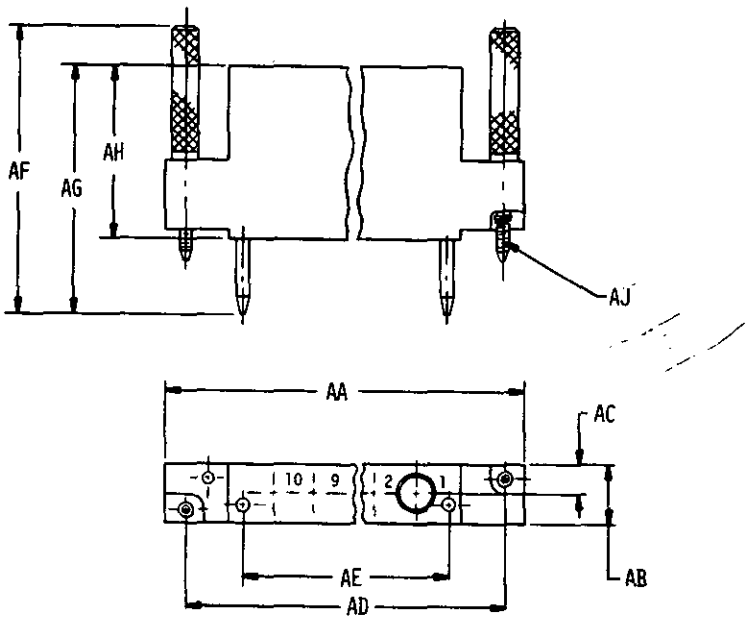


072-02-82


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

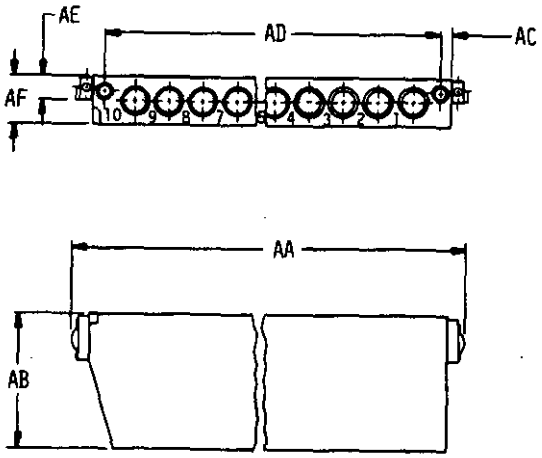

072-02-83

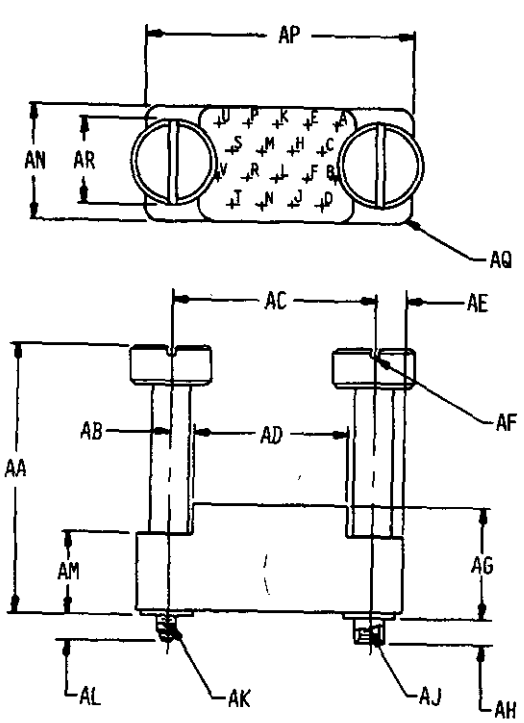


072-02-84

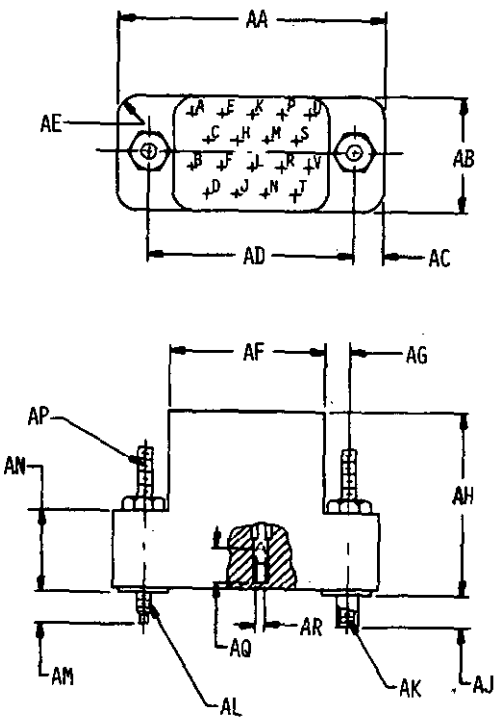


072-02-85

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

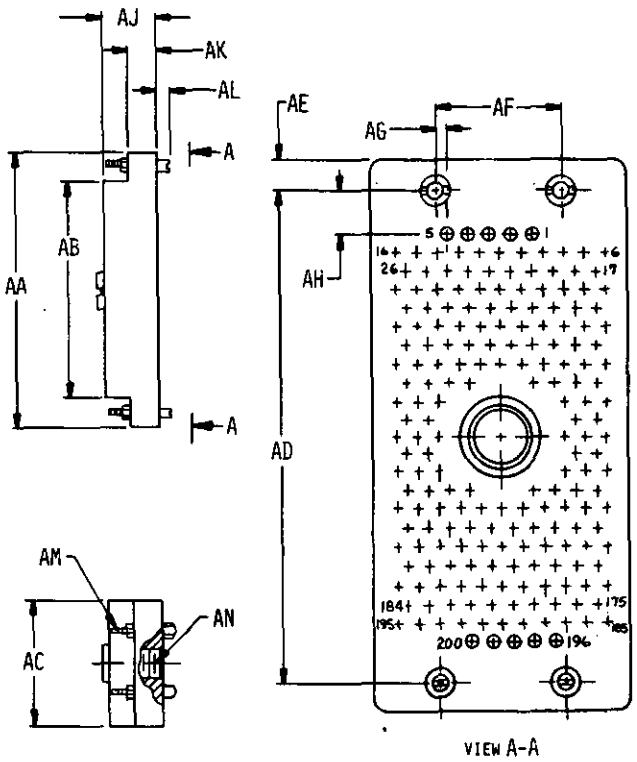


072-02-86


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

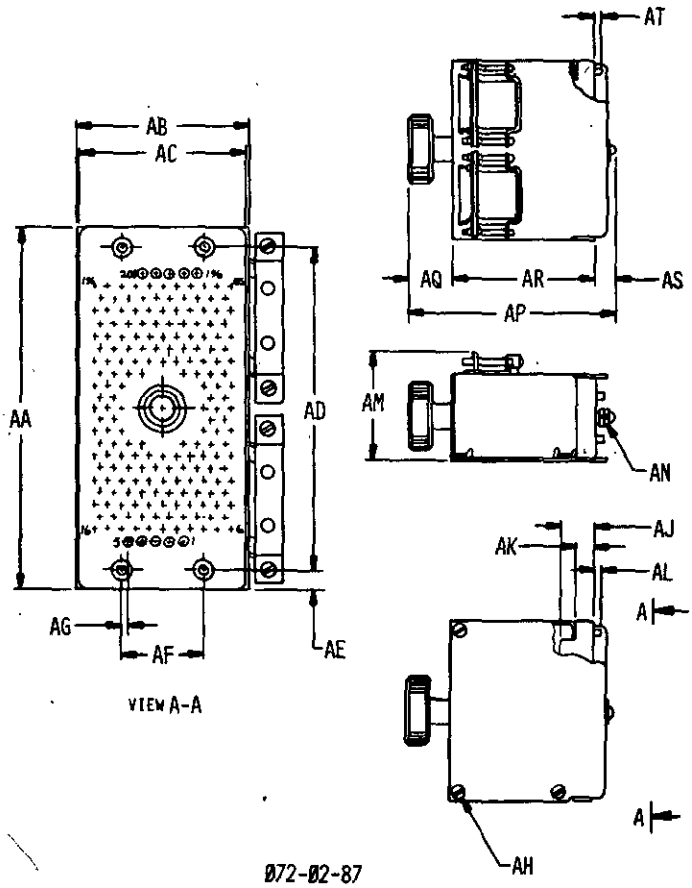

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

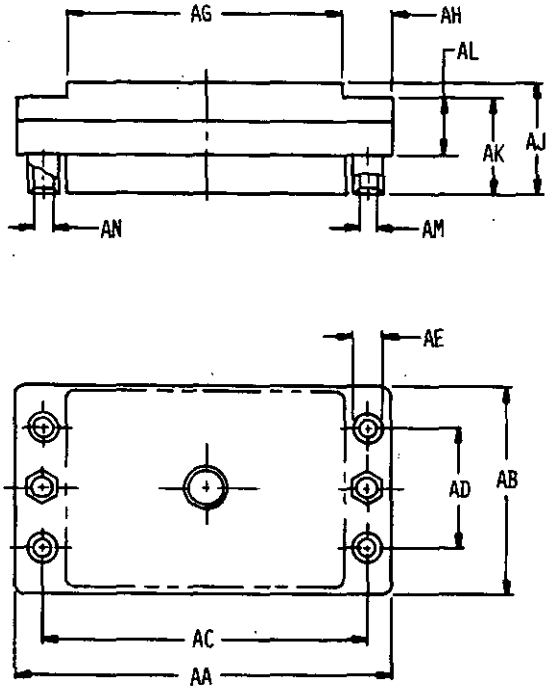


072-02-88

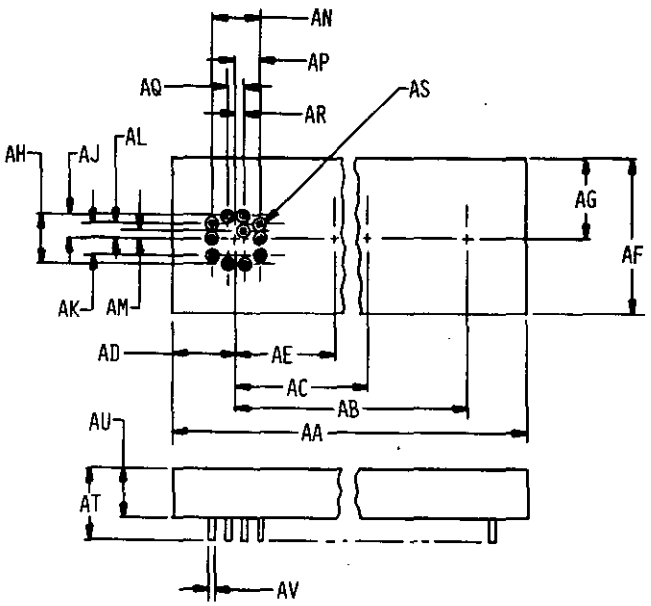


072-02-89

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

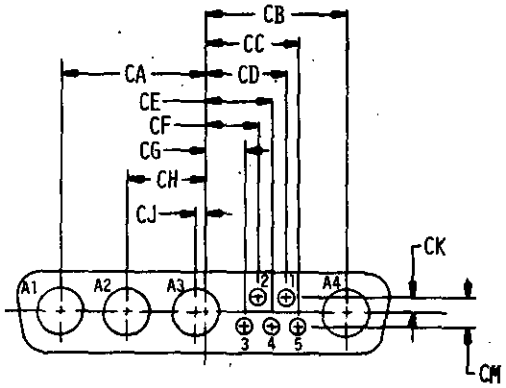


072-02-90

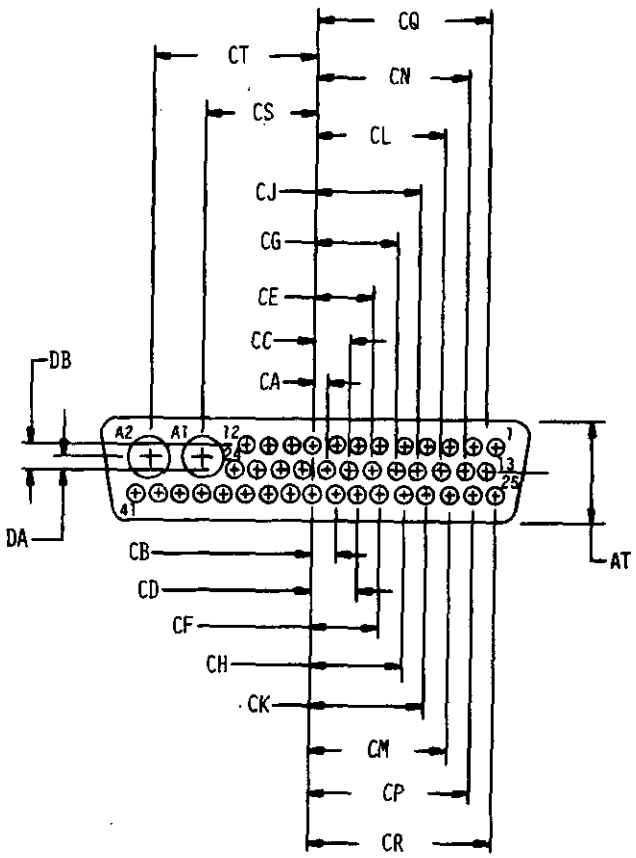


072-02-91


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

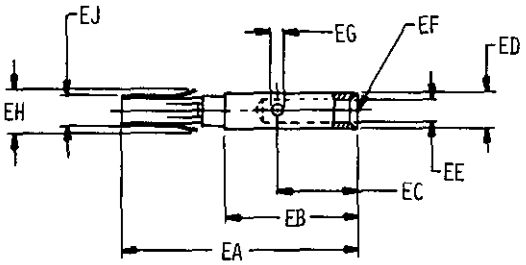

Ø72-Ø3-1

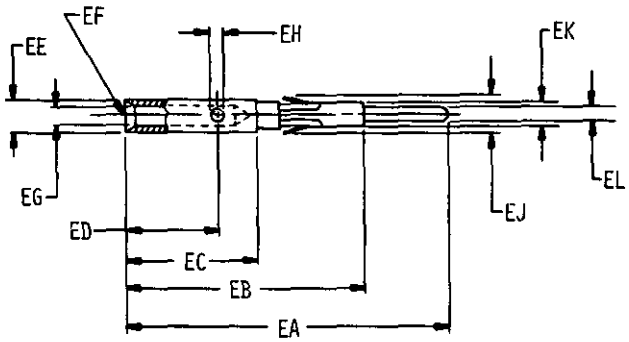


Ø72-Ø3-2

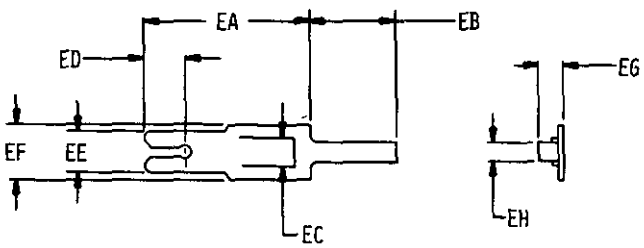



Ø72-Ø3-3

Source: https://assist.dla.mil - Downloaded: 2026Ø-26T07:24Z
Check the source to verify that this is the current version before use.

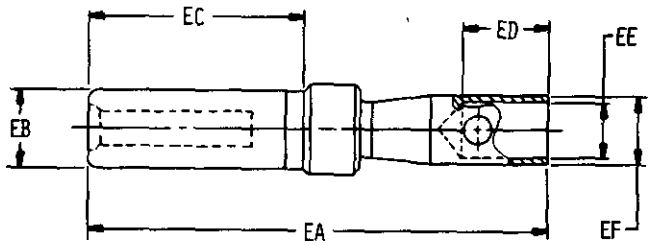

072-03-4

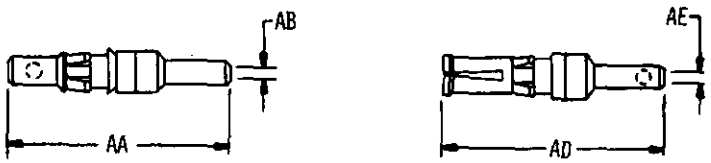



072-03-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	14	1505	146	1640	112	1761	96
0102	14	1508	134	1646	110	1764	96
0103	14	1509	134	1648	110	1768	94
0104	14	1520	108	1652	118	1770	96
0105	14	1529	152	1658	116	1776	92
0107	16	1545	146	1660	116	1778	92
0108	16	1546	146	1662	116	1779	92
0700	14	1568	30	1663	116	1782	90
0800	14	1570	30	1670	26	1786	34
1003	14	1571	30	1672	26	1788	34
1004	14	1572	30	1674	28	1790	34
1005	14	1581	30	1676	28	1792	34
1006	14	1582	30	1678	28	1794	34
1008	14	1586	30	1680	28	1796	34
1009	24	1590	32	1682	28	1798	34
1371	106	1591	32	1684	30	1800	26
1372	108	1592	32	1686	30	1802	30
1373	116	1593	34	1688	30	1806	36
1374	146	1594	34	1690	30	1810	36
1376	106	1595	34	1694	124	1812	36
1377	108	1596	34	1696	124	1814	36
1380	104	1600	38	1700	122	1816	36
1381	108	1601	38	1702	122	1818	36
1383	108	1602	22	1705	58	1820	36
1384	106	1604	22	1712	58	1822	38
1386	106	1606	22	1716	58	1824	38
1387	106	1607	22	1720	102	1826	38
1407	106	1608	22	1722	104	1828	20
1451	132	1609	22	1724	104	1829	20
1468	132	1610	22	1725	104	1830	20
1471	134	1612	22	1727	104	1831	20
1477	98	1614	22	1732	102	1832	20
1478	132	1615	22	1734	102	1833	20
1482	132	1616	22	1738	64	1834	20
1486	132	1618	22	1740	66	1835	20
1488	132	1624	88	1746	64	1842	34
1494	130	1626	88	1748	64	1844	36
1495	132	1628	88	1750	64	1846	36
1502	134	1632	86	1752	64	1852	32
1504	136	1634	88	1756	96	1854	32

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1858	32	2300	66	3108	48	3182	56
1860	32	2304	66	3110	48	3184	56
1862	32	3002	72	3116	48	3186	56
1904	32	3004	72	3118	48	3188	56
1906	32	3006	72	3120	42	3190	56
1910	32	3010	126	3121	42	3192	56
1916	34	3012	126	3122	42	3194	56
1980	70	3018	126	3123	42	3196	56
1990	70	3020	126	3124	42	3198	58
1994	70	3021	126	3125	44	3200	58
2000	68	3024	124	3126	44	3202	58
2002	70	3026	124	3127	50	3204	58
2052	110	3030	46	3128	50	3206	58
2054	110	3031	46	3130	50	3208	58
2060	108	3033	46	3131	42	3210	60
2062	110	3034	46	3132	50	3212	60
2066	114	3035	46	3134	50	3214	60
2068	114	3036	46	3136	50	3216	60
2070	114	3037	46	3138	52	3218	60
2078	112	3039	46	3140	52	3220	60
2082	112	3040	46	3142	52	3222	60
2088	72	3042	46	3144	52	3224	60
2090	74	3044	46	3146	52	3226	60
2094	74	3048	44	3148	52	3228	60
2099	74	3049	44	3150	52	3230	62
2100	48	3050	44	3152	52	3232	62
2102	48	3052	44	3154	52	3234	62
2104	48	3054	44	3156	52	3236	62
2106	48	3058	144	3158	54	3238	62
2108	48	3060	144	3160	54	3240	62
2110	50	3064	144	3162	54	3242	62
2112	50	3066	144	3164	54	3244	62
2258	120	3076	144	3166	54	3246	62
2259	120	3082	142	3168	54	3248	62
2262	122	3094	76	3170	54	3250	42
2264	120	3096	76	3172	54	3252	64
2266	120	3098	76	3174	54	3254	64
2294	68	3102	76	3176	54	3256	64
2295	68	3104	76	3178	54	3258	66
2297	68	3105	76	3180	56	3260	66

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3261	66	3340	80	3415	29	3498	104
3262	66	3342	82	3416	29	3500	106
3264	66	3344	82	3417	29	3502	108
3268	66	3346	82	3418	29	3504	108
3270	66	3348	82	3430	90	3506	108
3272	66	3350	82	3432	90	3508	108
3274	68	3352	82	3434	92	3510	110
3276	68	3354	82	3436	92	3512	110
3278	68	3356	82	3438	92	3514	110
3280	68	3358	82	3440	92	3516	112
3282	70	3360	84	3442	92	3518	112
3284	70	3362	86	3444	92	3520	112
3286	70	3364	86	3446	92	3522	112
3288	70	3366	88	3448	92	3524	112
3289	70	3368	88	3450	92	3526	112
3290	72	3370	88	3452	96	3528	114
3292	72	3372	88	3454	96	3530	114
3294	72	3374	88	3456	96	3532	114
3296	72	3376	90	3458	96	3534	114
3298	74	3378	90	3460	96	3536	114
3300	74	3380	90	3462	96	3538	114
3302	74	3382	90	3464	100	3540	114
3304	74	3384	90	3466	100	3542	114
3306	74	3386	90	3468	100	3544	114
3308	74	3388	90	3470	100	3546	116
3310	74	3390	90	3472	100	3548	116
3312	74	3401	29	3474	100	3550	116
3314	74	3402	29	3476	100	3552	116
3316	76	3403	29	3478	100	3554	118
3318	76	3404	29	3480	100	3556	118
3320	76	3405	29	3482	100	3558	118
3322	76	3406	29	3484	100	3560	118
3324	78	3407	29	3486	100	3562	118
3326	78	3408	29	3487	102	3564	118
3328	78	3409	29	3488	102	3566	118
3330	78	3410	29	3489	102	3568	118
3332	78	3411	29	3490	102	3570	120
3334	78	3412	29	3492	102	3571	120
3336	78	3413	29	3494	104	3572	120
3338	78	3414	29	3496	104	3574	120

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3576	120	3646	136	3728	148	4760	94
3578	122	3648	136	3730	148	4761	94
3580	122	3650	136	3732	148	4762	94
3582	122	3652	138	3733	150	4765	128
3584	122	3654	140	3734	150	4766	128
3586	122	3656	140	3736	150	4770	128
3588	122	3658	140	3738	150	4772	128
3590	122	3660	140	3740	150	4773	128
3592	122	3662	140	3742	150	4788	98
3594	124	3664	140	3744	150	4790	100
3596	124	3666	140	3746	150	4793	100
3598	124	3668	140	3748	150	4795	98
3600	124	3670	140	3750	150	4798	98
3602	124	3672	142	3752	150	4799	98
3604	124	3674	142	3754	150	4803	98
3606	124	3676	142	3756	152	4805	98
3608	126	3678	142	3758	152	4813	98
3610	126	3680	142	3760	152	4815	98
3611	126	3682	142	3762	152	4849	80
3612	128	3684	142	3764	152	4850	84
3613	128	3686	142	4662	138	4854	84
3614	128	3688	144	4663	138	4855	84
3616	130	3690	144	4664	138	4856	84
3618	130	3692	146	4665	138	4859	80
3620	130	3694	146	4666	138	4861	84
3622	130	3696	146	4667	138	4867	84
3624	130	3698	146	4672	136	4869	86
3626	130	3700	146	4674	136	4870	86
3628	130	3702	146	4675	136	4874	84
3630	130	3704	146	4681	144	4875	84
3632	130	3706	148	4682	146	4878	126
3634	132	3708	148	4683	138	4884	80
3635	132	3710	148	4684	136	4885	80
3636	134	3714	148	4685	136	4891	80
3637	134	3716	148	4686	136	4894	80
3638	134	3718	148	4715	140	4897	86
3639	134	3720	148	4717	86	4900	82
3640	134	3722	148	4754	94	4902	82
3642	134	3724	148	4755	94	4906	80
3644	136	3726	148	4756	94	4908	78

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4942	152	6870	154				
4943	152	6873	14				
4944	152	6874	16				
4950	24	6941	16				
5000	86	6942	16				
5052	20	6991	156				
5054	18	6992	156				
5060	18	6993	156				
5061	18	6994	156				
5062	18	6995	156				
5063	18	7001	154				
5068	18	7002	154				
5069	18	7003	154				
5070	18	7004	154				
5071	18	7005	154				
5209	152	7021	40				
6205	138	7022	40				
6263	44	7023	40				
6264	44	7024	40				
6265	44	7301	18				
6267	86	7302	18				
6272	42	7345	42				
6273	42	7572	24				
6280	80	7577	24				
6308	80	7580	26				
6310	82	7629	154				
6359	106	7630	154				
6369	14						
6372	154						
6790	38						
6791	38						
6792	38						
6793	38						
6794	38						
6795	40						
6796	40						
6798	40						
6799	40						
6801	40						
6803	40						

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Acceleration	42
Additional Part Marking	156
Additional Requirements	154
Altitude	38
Altitude Immersion	44
Altitude-Low Temperature	48
Altitude Rating	18
Aperture Cards Required	16
Applicable Documents	156
Backshell Accessories	34
Base Document	14
Cable Pull-Out	50
Cable Seal Flexing	52
City, State Zip	14
Classification	22
Company Name/Command	14
Configuration	24, 30
Contact Axial Concentricity	56
Contact Current Rating	22
Contact Engagement and Separation Force	58
Contact Insertion and Removal Force	64
Contact Pin Strength	66
Contact Resistance	68
Contact Retention	72
Contacts	28
Contract Number/Office Symbol	14
Control, Source	14
Control, Specification	16
Crimp Tensile Strength	76
Crush	76
Date	14
Design and Construction	26
Dielectric Withstanding Voltage at Reduced Barometric Pressure	78
Dielectric Withstanding Voltage at Sea Level	84
Durability	86
Finishes	26
Flammability	88
Fluid Immersion	90
Format	14
Fungus	94

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Gage Location and Retention	94
Government Design Activity FSCM	14
Grommet Sealing Plugs	36
Grommet (Wire Seal)	34
Humidity	98
Identification	30
Illustrations	24
Insert	26
Insertion	32
Insert Retention	102
Insulation Resistance	104
Low-Signal Level Contact Resistance	108
Lubrication	38
Magnetic Permeability	110
Maintenance Aging	112
Materials	26
Mating Connector	38
Mating and Unmating Forces	116
Metals	26
Mounting Hardware	154
Nomenclature	156
Notes	156
Oversize Pin Exclusion	120
Ozone Exposure	122
Packaging	156
Part Marking	154
Part Number	16
Part Number Cross-Reference	156
Phone Number	14
Polarization	32
Probe Damage (Contacts)	124
Quality Assurance Provisions	156
Rated Working Voltage	20
Removal	32
Requester FSCM	14
Requester's Name	14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Revision of AEDPS Document	16
Salt Spray	126
Scope	16
Seal (Air Leakage)	130
Shell	34
Shock, High Impact	130
Shock, Specified Pulse	134
Sizes	28
Solderability	136
Source Table	16
Storage Conditions	152
Street/Building	14
Superseded Document	156
System Application	14
Tabulated Characteristics	24
Temperature	38
Temperature Cycling	138
Temperature Life	142
Temperature Rating	18
Termination	30
Tools	32
Type	28
Units of Measure	16, 24
Vibration	144
Weight	40
Workmanship	154

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-69A(MI), dated 15 Dec 1978 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-69A(MI), dated 15 Dec 1978 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.