DOD-STD-35-6B(MI)
5 January 1979
SUPERSEDING
SECTION 1
MIL-STD-35-6A(MI)
28 AUGUST 1973

MILITARY STANDARD

SWITCHES, ROTARY

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM



FSC EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Switches, Rotary
Automated Engineering
Document Preparation System

DOD-STD-35-6B(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-6B(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for rotary switches.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	3
	2.1	Issues of documents	3
	2.2	Other publications	4
	3.	DEFINITIONS	5
	4.	GENERAL REQUIREMENTS	7
	4.1	Introduction	7
	4.2	Specification Requirement Sheet (SRS)	7
	4.3	Configuration	7
	4.3.1	Dimensions	7
	4.3.2	Illustrations	7
	4.4	Units of measure	7
	5.	DETAILED REQUIREMENTS	9
	5.1	Introduction	9
	5.2	MSE Formats	9
	5.3	Referenced documents	9
	5.4	Text matrix	9
	5.5	Tabulation	10
	5.6	Keyword Code Index (KCI) and Standard Paragraphs	13
	5.6.1	Interrelationship of Codes	13
	5.6.2	Automatic MSE Data	13
	5.6.3	DOD-STD-35 Tables	13

TABLES

Table	I.	Title Index	2
	II.	Test matrix	10
	III.	Tabulation candidates	11

APPENDICES

Appendix	A.	Illustrations	207
	B.	Characteristic Code Index	249
		Index	263

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS) provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for rotary switches.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. It is recommended that MIL-STD-1132, Selection and Use of Switches, and Associated Hardware, be reviewed prior to using this dash-numbered part book.

The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
SWITCH, ROTARY	Ø12141	MIL-S-3786	LOW CURRENT
		MIL-S-6746	AIRCRAFT IGNITION
		MIL-S-6807	POWER
		MS21994	AMMETER SELECTOR
		MS21995	AMMETER-VOLTMETER SELECTOR
		MS25002	28/115 VOLTS
		MS90547	28/125 VOLTS
		MIL-S-13623	28 VOLT DC
		MS39060	WATERPROOF
		MS75064	STOPLIGHT
		MIL-S-15291	SNAP ACTION
		MIL-S-15743	ENCLOSED
		MIL-S-21438	SOLENOID OPERATED
		MIL-S-21604	1 TO 10 AMP
		MIL-S-22710	THUMBWHEEL
		MIL-S-28714	SOLENOID OPERATED
		MIL-S-45885	LANCE WARHEAD
		MIL-S-50951	4 POS STEPPING
		MIL-S-83504	DUAL IN-LINE PACKAGE

Source: https://assist.dla.mil -- Downloaded: 2026Ø10-26T07:23Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-S-901	Shock Tests (High Impact) Shipboard Machinery, Equipment and Systems, Requirements For
MIL-E-13856	Electrical Components for Automotive Vehicles; Waterproofness Tests
MIL-S-22710	Switches, Rotary (Printed Curcuit), (Thumbwheel, Inline, and Pushbutton) General Specifications For

STANDARDS

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-167-1	Mechanical Vibrations of Shipboard Equipment (Type I - Environmental and Type II - Internally Excited)
MIL-STD-202	Test Methods for Electronic and Electrical Parts
MIL-STD-461	Electromagnetic Interference Characteristics, Requirements for Equipment
MIL-STD-462	Electromagnetic Interference Characteristics, Measurement Of
MIL-STD-810	Environmental Test Methods for Aerospace and Ground Equipment
MIL-STD-1285	Marking of Electrical and Electronic Parts

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currentversion before use.

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTME380	Metric Practice Guide
ASTMD1868	Standard Method for Detection and Measurement of Corona Pulses in Evaluation of Insulation

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Switches, Rotary.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for Switches, Rotary, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Switches, Rotary.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Switches, Rotary.

4.3.2 Illustrations. Illustrations applicable to Switches, Rotary are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currentversion before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Test matrix. A test matrix is supplied as a guide for selecting documents to specify tests (see table II). The test matrix presents documents most applicable for use to satisfy the statement "TEST PER (DOC DES)". Any document listed in the Title Index may be used to satisfy the statement. However, the selected document from the Title Index must contain the desired test. Government test method documents and approved industry standards such as ASTM test methods may also be used to satisfy the statement "TEST PER (DOC DES)".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE II. TEST MATRIX.

DOCUMENT	TEST CODE	1764 Coil Current	1792 Coincidence of Operating and Release Points (Simultaneity)	1886 Corona at Reduced Barometric Pressure	1858 Corona at Sea Level	1914 Endurance, Electrical	3612 Endurance, Mechanical	2302 Overload	2346 Rotational Torque/ Operating Force	2392 Short Circuit	2412 Stops Strength	2438 Strength, Mounting Means	3700 Temperature, High	3702 Temperature, Low	2452 Temperature Rise	2480 Thermal EMF
MIL-S-3786		X		X	X				X		X	X			X	X
MIL-S-6746									X			X	X	X		
MIL-S-6807						X		X	X			X			X	
MIL-S-13623						X	X	X	X				X	X		
MIL-S-15291						X		X		X	X				X	
MIL-S-21438		X											X	X		
MIL-S-21604			X			X	X		X		X				X	
MIL-S-22710				X	X				X		X	X				
MIL-S-28714		X														

5.5 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table III provides codes for column headings which may be used for rotary switch characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currentversion before use.

TABLE III. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
3528	TYPE DES	1583	ENCLOSURE	1568	NUMBER OF POLES
3530	POLE	3532	THROW	1569	NUMBER OF SECTIONS/ DECKS
1570	NUMBER OF POSITIONS PER DECK	1562	NUMBER OF POLES PER DECK	1575	INDEXING ANGLE DEGREES
2701	CURRENT CARRYING RESISTIVE DC LOAD VOLTS	2725	CURRENT CARRYING INDUCTIVE DC LOAD VOLTS	2773	CURRENT CARRYING LAMP DC LOAD VOLTS
2702	CURRENT CARRYING RESISTIVE DC LOAD AMPERES	2726	CURRENT CARRYING INDUCTIVE DC LOAD AMPERES	2774	CURRENT CARRYING LAMP DC LOAD AMPERES
2704	CURRENT CARRYING RESISTIVE AC LOAD FREQUENCY HERTZ	2728	CURRENT CARRYING INDUCTIVE AC LOAD FREQUENCY HERTZ	2776	CURRENT CARRYING LAMP AC LOAD FREQUENCY HERTZ
2705	CURRENT CARRYING RESISTIVE AC LOAD AMPERES	2729	CURRENT CARRYING INDUCTIVE AC LOAD AMPERES	2777	CURRENT CARRYING LAMP AC LOAD AMPERES
2703	CURRENT CARRYING RESISTIVE AC LOAD VOLTS	2727	CURRENT CARRYING INDUCTIVE AC LOAD VOLTS	2775	CURRENT CARRYING LAMP AC LOAD VOLTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES. (CONT)

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
2502	MAKE AND BREAK RESISTIVE DC LOAD VOLTS	2526	MAKE AND BREAK INDUCTIVE DC LOAD VOLTS	2574	MAKE AND BREAK LAMP DC LOAD VOLTS
2503	MAKE AND BREAK RESISTIVE DC LOAD AMPERES	2527	MAKE AND BREAK INDUCTIVE DC LOAD AMPERES	2575	MAKE AND BREAK LAMP DC LOAD AMPERES
2504	MAKE AND BREAK RESISTIVE AC LOAD VOLTS	2528	MAKE AND BREAK INDUCTIVE AC LOAD VOLTS	2576	MAKE AND BREAK LAMP AC LOAD VOLTS
2505	MAKE AND BREAK RESISTIVE AC LOAD FREQUENCY HERTZ	2529	MAKE AND BREAK INDUCTIVE AC LOAD FREQUENCY HERTZ	2577	MAKE AND BREAK LAMP AC LOAD FREQUENCY HERTZ
2506	MAKE AND BREAK RESISTIVE AC LOAD AMPERES	2530	MAKE AND BREAK INDUCTIVE AC LOAD AMPERES	2578	MAKE AND BREAK LAMP AC LOAD AMPERES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

5.6 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.6.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.6.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.6.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT	0700
ONE SECTION DOCUMENT	0800
*CONTROL (SELECT ONE)	
SOURCE	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT NUMBER	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the currentversion before use.

CHAR
CODE STANDARD PARAGRAPH

6874 THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).

0107

0108 0108.

SCOPE.

SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.

PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.

PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

6941 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.

6942 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE RATING	
MAXIMUM OPERATING (DEGREES CELSIUS)	5069
MAXIMUM NONOPERATING (DEGREES CELSIUS)	5071
MAXIMUM STORAGE (DEGREES CELSIUS)	7302
MAXIMUM SERVICE (DEGREES CELSIUS)	4905
MAXIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5054
MINIMUM OPERATING (DEGREES CELSIUS)	5068
MINIMUM NONOPERATING (DEGREES CELSIUS)	5070
MINIMUM STORAGE (DEGREES CELSIUS)	7301
MINIMUM SERVICE (DEGREES CELSIUS)	4904
MINIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5052
NOMINAL OPERATING (DEGREES CELSIUS)	5046
NOMINAL STORAGE (DEGREES CELSIUS)	5048

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currenversion before use.

CHAR CODE	STANDARD PARAGRAPH
	TEMPERATURE RATING.
5069	THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS.
5071	THE MAXIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5071 DEGREES CELSIUS.
7302	THE MAXIMUM STORAGE TEMPERATURE RATING SHALL BE 7302 DEGREES CELSIUS.
4905	THE MAXIMUM SERVICE TEMPERATURE RATING SHALL BE 4905 DEGREES CELSIUS.
5054	THE MAXIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5054 DEGREES CELSIUS.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.
5070	THE MINIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5070 DEGREES CELSIUS.
7301	THE MINIMUM STORAGE TEMPERATURE RATING SHALL BE 7301 DEGREES CELSIUS.
4904	THE MINIMUM SERVICE TEMPERATURE RATING SHALL BE 4904 DEGREES CELSIUS.
5052	THE MINIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5052 DEGREES CELSIUS.
5046	THE NOMINAL OPERATING TEMPERATURE RATING SHALL BE 5046 DEGREES CELSIUS.
5048	THE NOMINAL STORAGE TEMPERATURE RATING SHALL BE 5048 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
POWER RATING	
MINIMUM POWER (SELECT ONE)	
(WATTS)	7631
(KILOWATTS)	7632
(MILLIWATTS)	7633
(VOLTAMPERES)	7645
ALTITUDE RATING	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5060
SEA LEVEL TO (METERS)	5061
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5062
SEA LEVEL TO (METERS)	5063
CLASSIFICATION	
TYPE DESIGNATION	
PER BASE DOCUMENT	
STYLE (DESIGNATION)	3500

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	POWER RATING.
7631	THE MINIMUM POWER RATING SHALL BE 7631 WATT(S).
7632	THE MINIMUM POWER RATING SHALL BE 7632 KILOWATT(S).
7633	THE MINIMUM POWER RATING SHALL BE 7633 MILLIWATT(S).
7645	THE MINIMUM POWER RATING SHALL BE 7645 VOLTAMPERE(S).
	ALTITUDE RATING.
5060	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5060 FEET.
5061	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5061 METERS.
5062	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5062 FEET.
5063	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5063 METERS.
	TYPE DESIGNATION.
3500	THE ITEM(S) STYLE SHALL BE 3500 IN ACCORDANCE WITH THE BASE DOCUMENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION (CONT)	
PER BASE DOCUMENT (CONT)	
CONSTRUCTION (DESIGNATION)	3502
TEMPERATURE-LIFE CHARACTERISTIC (DESIGNATION)	3504
VIBRATION GRADE (DESIGNATION)	3506
SHOCK TYPE (DESIGNATION)	3508
ALTITUDE (DESIGNATION)	3510
INSULATION (DESIGNATION)	3512
CLASS (DESIGNATION)	3514
SWITCHING CHARACTERISTIC (DESIGNATION)	3516
MOUNTING, CONNECTION AND HANDLE ARRANGEMENT (DESIGNATION)	3518
ROTOR (DESIGNATION)	3520
POSITION (DESIGNATION)	3522

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3502	THE ITEM(S) CONSTRUCTION DESIGNATION SHALL BE 3502 IN ACCORDANCE WITH THE BASE DOCUMENT.
3504	THE ITEM(S) TEMPERATURE-LIFE CHARACTERISTIC SHALL BE 3504 IN ACCORDANCE WITH THE BASE DOCUMENT.
3506	THE ITEM(S) VIBRATION GRADE SHALL BE 3506 IN ACCORDANCE WITH THE BASE DOCUMENT.
3508	THE ITEM(S) SHOCK TYPE SHALL BE 3508 IN ACCORDANCE WITH THE BASE DOCUMENT.
3510	THE ITEM(S) ALTITUDE DESIGNATION SHALL BE 3510 IN ACCORDANCE WITH THE BASE DOCUMENT.
3512	THE ITEM(S) INSULATION DESIGNATION SHALL BE 3512 IN ACCORDANCE WITH THE BASE DOCUMENT.
3514	THE ITEM(S) CLASS SHALL BE 3514 IN ACCORDANCE WITH THE BASE DOCUMENT.
3516	THE ITEM(S) SWITCHING CHARACTERISTIC SHALL BE 3516 IN ACCORDANCE WITH THE BASE DOCUMENT.
3518	THE ITEM(S) MOUNTING, CONNECTION AND HANDLE ARRANGEMENT SHALL BE 3518 IN ACCORDANCE WITH THE BASE DOCUMENT.
3520	THE ITEM(S) ROTOR DESIGN SHALL BE 3520 IN ACCORDANCE WITH THE BASE DOCUMENT.
3522	THE ITEM(S) POSITION DESIGNATION SHALL BE 3522 IN ACCORDANCE WITH THE BASE DOCUMENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION (CONT)	
PER BASE DOCUMENT (CONT)	
SECTIONS (NUMBER)	3524
VARIATION (DESIGNATION)	3526
OTHER ____	3528
RATED LOADS	
CURRENT CARRYING CAPACITY	
NOTE: SEE RATED LOAD TABLE.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE STANDARD PARAGRAPH

3524 THE ITEM(S) SECTIONS QUANTITY SHALL BE 3524 IN ACCORDANCE WITH THE BASE DOCUMENT.

3526 THE ITEM(S) VARIATION DESIGNATION SHALL BE 3526 IN ACCORDANCE WITH THE BASE DOCUMENT.

3528 THE ITEM(S) TYPE DESIGNATION SHALL BE 3528.

RATED LOAD (CURRENT CARRYING CAPACITY). THE RATED LOAD (CURRENT CARRYING CAPACITY) OF THE ITEM(S) SHALL BE IN ACCORDANCE WITH THE RATED LOAD TABLE (CURRENT CARRYING CAPACITY).

RATED LOAD TABLE (CURRENT CARRYING CAPACITY)

	DC		AC			PRESSURE
LOAD TYPE	VOLTS	AMPERES	VOLTS RMS	FREQ. HERTZ	AMPERES	MILLIMETERS OF MERCURY
RESISTIVE	2701	2702	2703	2704	2705	2706
RESISTIVE	2707	2708	2709	2710	2711	2712
RESISTIVE	2713	2714	2715	2716	2717	2718
RESISTIVE	2719	2720	2721	2722	2723	2724
INDUCTIVE	2725	2726	2727	2728	2729	2730
INDUCTIVE	2731	2732	2733	2734	2735	2736
INDUCTIVE	2737	2738	2739	2740	2741	2742
INDUCTIVE	2743	2744	2745	2746	2747	2748
MOTOR	2749	2750	2751	2752	2753	2754
MOTOR	2755	2756	2757	2758	2759	2760
MOTOR	2761	2762	2763	2764	2765	2766
MOTOR	2767	2768	2769	2770	2771	2772
LAMP	2773	2774	2775	2776	2777	2778
LAMP	2779	2780	2781	2782	2783	2784
LAMP	2785	2786	2787	2788	2789	2790
LAMP	2791	2792	2793	2794	2795	2796

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RATED LOADS (CONT)	
CURRENT CARRYING CAPACITY (CONT)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

RATED LOAD TABLE (CURRENT CARRYING CAPACITY) (CONT)

	DC		AC			PRESSURE
LOAD TYPE	VOLTS	AMPERES	VOLTS RMS	FREQ. HERTZ	AMPERES	MILLIMETERS OF MERCURY
LOW-LEVEL (DRY CKT)	2801	2802	2803	2804	2805	2806
LOW-LEVEL (DRY CKT)	2807	2808	2809	2810	2811	2812
LOW-LEVEL (DRY CKT)	2813	2814	2815	2816	2817	2818
LOW-LEVEL (DRY CKT)	2819	2820	2821	2822	2823	2824
2825	2826	2827	2828	2829	2830	2831
2832	2833	2834	2835	2836	2837	2838
2839	2840	2841	2842	2843	2844	2845
2846	2847	2848	2849	2850	2851	2852

NOTE A: 2853.
NOTE B: 2854.
NOTE C: 2855.
NOTE D: 2856.
NOTE E: 2857.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RATED LOADS (CONT)	
MAKE AND BREAK CAPACITY	
NOTE: SEE RATED LOAD TABLE.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

RATED LOAD (MAKE AND BREAK CAPACITY). THE RATED LOAD (MAKE AND BREAK CAPACITY) OF THE ITEM(S) SHALL BE IN ACCORDANCE WITH THE RATED LOAD TABLE (MAKE AND BREAK CAPACITY).

RATED LOAD TABLE (MAKE AND BREAK CAPACITY)

	DC		AC			PRESSURE
LOAD TYPE	VOLTS	AMPERES	VOLTS RMS	FREQ. HERTZ	AMPERES	MILLIMETERS OF MERCURY
RESISTIVE	2502	2503	2504	2505	2506	2501
RESISTIVE	2508	2509	2510	2511	2512	2507
RESISTIVE	2514	2515	2516	2517	2518	2513
RESISTIVE	2520	2521	2522	2523	2524	2519
INDUCTIVE	2526	2527	2528	2529	2530	2525
INDUCTIVE	2532	2533	2534	2535	2536	2531
INDUCTIVE	2538	2539	2540	2541	2542	2537
INDUCTIVE	2544	2545	2546	2547	2548	2543
MOTOR	2550	2551	2552	2553	2554	2549
MOTOR	2556	2557	2558	2559	2560	2555
MOTOR	2562	2563	2564	2565	2566	2561
MOTOR	2568	2569	2570	2571	2572	2567
LAMP	2574	2575	2576	2577	2578	2573
LAMP	2580	2581	2582	2583	2584	2579
LAMP	2586	2587	2588	2589	2590	2585
LAMP	2592	2593	2594	2595	2596	2591
LOW-LEVEL (DRY CKT)	2601	2602	2603	2604	2605	2606
LOW-LEVEL (DRY CKT)	2607	2608	2609	2610	2611	2612
LOW-LEVEL (DRY CKT)	2613	2614	2615	2616	2617	2618
LOW-LEVEL (DRY CKT)	2619	2620	2621	2622	2623	2624
2625	2626	2627	2628	2629	2630	2631
2632	2633	2634	2635	2636	2637	2638
2639	2640	2641	2642	2643	2644	2645
2646	2647	2648	2649	2650	2651	2652

NOTE A: 2653.
NOTE B: 2654.
NOTE C: 2655.
NOTE D: 2656.
NOTE E: 2657.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CIRCUIT CONFIGURATION TABLE	
NOTE: SEE CIRCUIT TABLE.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

CIRCUIT CONFIGURATION. THE CLOSED CONNECTIONS IN EACH POSITION SHALL BE AS SPECIFIED IN THE CIRCUIT TABLE. THE SYMBOLS IN THE SECOND COLUMN OF THE CIRCUIT TABLE ARE DEFINED AS FOLLOWS:

THE FIRST LETTER OF EACH SYMBOL REFERS TO THE WAFER (SECTION) CONTAINING THE CONTACT.

THE NUMBER IN EACH SYMBOL REFERS TO THE POSITION OF THE CONTACT ON THE WAFER (SECTION).

THE FINAL LETTER, IF USED, REFERS TO THE FRONT (F) OR REAR (R) LOCATION OF THE CONTACT ON THE WAFER.

A DASH IS USED BETWEEN SYMBOLS TO SPECIFY THAT THOSE CONTACTS ARE CONNECTED IN THE INDICATED POSITION OF THE SWITCH.

CIRCUIT TABLE

POSITION	CLOSED CONNECTIONS
2001	2002
2003	2004
2005	2006
2007	2008
2009	2010
2011	2012
2013	2014
2015	2016
2017	2018
2019	2020
2021	2022
2023	2024
2025	2026
2027	2028
2029	2030
2031	2032
2033	2034
2035	2036
2037	2038
2039	2040
2041	2042
2043	2044

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CIRCUIT CONFIGURATION TABLE (CONT)	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

CIRCUIT TABLE (CONT)

POSITION	CLOSED CONNECTIONS
2045	2046
2047	2048
2049	2050
2051	2052
2053	2054
2055	2056
2057	2058
2059	2060
2061	2062
2063	2064
2065	2066
2067	2068
2069	2070
2071	2072
2073	2074
2075	2076
2077	2078
2079	2080
2081	2082
2083	2084
2085	2086
2087	2088
2089	2090
2091	2092
2093	2094
2095	2096
2097	2098
2099	2100

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DUMMY LUGS	

NOTE: SEE DUMMY LUG TABLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

DUMMY LUGS. DUMMY LUGS SHALL BE PROVIDED IN THE LOCATIONS SPECIFIED IN THE DUMMY LUG TABLE.

DUMMY LUG TABLE

SECTION	TERMINAL
4001	4002
4003	4004
4005	4006
4007	4008
4009	4010
4011	4012
4013	4014
4015	4016
4017	4018
4019	4020

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
*UNITS (SELECT ONE)	
U.S.	
INCHES.	7572
SI (SELECT ONE)	
CENTIMETERS.	7576
MILLIMETERS.	7577
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950

NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.

TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)

MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)

NOTE: AUTOMATIC WHEN TABLE VII IS USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7576	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN CENTIMETERS OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.
	MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE IX IS USED.	
METALS	
DISSIMILAR METALS.	7580
DESIGN RELIABILITY	
FAILURE RATE (PERCENT PER 1000 HOURS)	7025
CONFIDENCE LEVEL (PERCENT)	7026
RATING TEMPERATURE (DEGREES CELSIUS)	7029
ELECTRICAL STRESS (SELECT ONE)	
VOLTAGE (PERCENT OF RATED)	7030
LOAD (PERCENT OF RATED)	7027
POWER (PERCENT OF RATED)	7028

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

7580 METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.

DESIGN RELIABILITY. THE ITEM(S) SHALL BE DESIGNED, USING MATERIALS AND MANUFACTURING PROCESSES CAPABLE OF MEETING THE FOLLOWING CONDITIONS:

7025 THE FAILURE RATE SHALL BE LESS THAN 7025 PERCENT PER 1000 HOURS.

7026 THE CONFIDENCE LEVEL SHALL BE 7026 PERCENT.

7029 THE DESIGN RELIABILITY SHALL BE AT A TEMPERATURE OF 7029 DEGREES CELSIUS.

7030 THE DESIGN RELIABILITY SHALL BE AT 7030 PERCENT OF THE RATED VOLTAGE.

7027 THE DESIGN RELIABILITY APPLIED LOAD SHALL BE AT 7027 PERCENT OF THE RATED LOAD.

7028 THE DESIGN RELIABILITY SHALL BE AT 7028 PERCENT OF THE RATED POWER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION	
ENCLOSURE (SELECT ONE)	
HERMETICALLY SEALED.	1577
EXPLOSION PROOF.	1578
MOISTURE RESISTANT.	1579
DUST PROOF.	1580
OPEN (NO ENCLOSURE).	1582
OTHER ____	1583
CONTACT ARRANGEMENT	
POLES (QUANTITY)	3530
*THROW (QUANTITY)	3532
SWITCH CONSTRUCTION	
POLES (QUANTITY)	1568
SECTIONS/DECKS (QUANTITY)	1569
POSITIONS PER DECK (QUANTITY)	1570
POLES PER DECK (QUANTITY)	1562
STOPS (SELECT ONE)	
REQUIRED (LOCATION)	1571
NOT REQUIRED.	1572
ADJUSTABLE.	1564
INDEXING ANGLE	
(DEGREES)	1575

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	DESIGN AND CONSTRUCTION.
1577	ENCLOSURE. THE SWITCH ENCLOSURE SHALL BE HERMETICALLY SEALED.
1578	ENCLOSURE. THE SWITCH ENCLOSURE SHALL BE EXPLOSION PROOF.
1579	ENCLOSURE. THE SWITCH ENCLOSURE SHALL BE MOISTURE RESISTANT.
1580	ENCLOSURE. THE SWITCH ENCLOSURE SHALL BE DUST PROOF.
1582	ENCLOSURE. THE SWITCH ENCLOSURE SHALL BE OPEN (NO ENCLOSURE).
1583	ENCLOSURE. THE SWITCH ENCLOSURE SHALL BE 1583.
3530 3532	CONTACT ARRANGEMENT. THE CONTACT ARRANGEMENT SHALL BE 3530 POLE, 3532 THROW.
	SWITCH CONSTRUCTION. SWITCH CONSTRUCTION SHALL BE AS FOLLOWS:
1568	POLES: 1568.
1569	SECTIONS/DECKS: 1569.
1570	POSITIONS PER DECK: 1570.
1562	POLES PER DECK: 1562.
1571	STOPS. STOPS ARE REQUIRED 1571.
1572	STOPS. STOPS ARE NOT REQUIRED.
1564	STOPS. PROVISIONS FOR ADJUSTABLE STOPS ARE REQUIRED.
1575	INDEXING ANGLE. THE INDEXING ANGLE (ANGLE BETWEEN POSITIONS) SHALL BE 1575 DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
SHORTING CONTACTS	
SECTION (DESIGNATION)	1592
NON-SHORTING CONTACTS	
SECTION (DESIGNATION)	1566
BUSHING STYLE	
STYLE ____	1599
CIRCUIT BOARD TERMINATION (SELECT ONE)	
CARD EDGE CONNECTORS.	1594
DIRECT WIRE.	1596
PROBE TERMINALS (PC PINS).	1585
OTHER ____	1590
NONTURN DEVICE	
REQUIRED.	1598

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1592	SHORTING CONTACTS. SECTION(S) 1592 SHALL HAVE SHORTING CONTACTS.
1566	NON-SHORTING CONTACTS. SECTION(S) 1566 SHALL HAVE NON-SHORTING CONTACTS.
1599	BUSHING STYLE. THE BUSHING STYLE SHALL BE 1599.
1594	CIRCUIT BOARD TERMINATION. THE SWITCH CIRCUIT BOARD TERMINATION SHALL BE CARD EDGE CONNECTORS.
1596	CIRCUIT BOARD TERMINATION. THE SWITCH CIRCUIT BOARD TERMINATION SHALL BE DIRECT WIRE.
1585	CIRCUIT BOARD TERMINATION. THE SWITCH CIRCUIT BOARD TERMINATION SHALL BE PROBE TERMINALS (PC PINS).
1590	CIRCUIT BOARD TERMINATION. THE SWITCH CIRCUIT BOARD TERMINATION SHALL BE 1590.
1598	NONTURN DEVICE. A NONTURN DEVICE IS REQUIRED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
SOLENOID COIL CURRENT (SELECT ONE)	
(AMPERES)	1603
(MILLIAMPERES)	1616
SOLENOID COIL VOLTAGE (SELECT ONE)	
(VOLTS, AC)	1601
(VOLTS, DC)	1602
SOLENOID COIL RESISTANCE	
(OHMS)	1620
TERMINATION	
PER ILLUSTRATION 012-11-3 (LETTER)	1605
SOLDER TAB	
WIRE ACCOMMODATION	
NUMBER OF WIRES (QUANTITY)	1606
WIRE SIZE (SELECT ONE).	
(AWG)	1607
(MILLIMETERS, DIAMETER)	1622

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1603	SOLENOID COIL CURRENT. THE SOLENOID COIL CURRENT SHALL BE 1603 AMPERE(S).
1616	SOLENOID COIL CURRENT. THE SOLENOID COIL CURRENT SHALL BE 1616 MILLIAMPERE(S).
1601	SOLENOID COIL VOLTAGE. THE SOLENOID COIL VOLTAGE SHALL BE 1601 VOLTS, AC.
1602	SOLENOID COIL VOLTAGE. THE SOLENOID COIL VOLTAGE SHALL BE 1602 VOLTS, DC.
1620	SOLENOID COIL RESISTANCE. THE SOLENOID COIL RESISTANCE SHALL BE 1620 OHMS.
1605	TERMINATION. TERMINALS SHALL BE TYPE 1605 AS SPECIFIED IN ILLUSTRATION 012-11-3. SOLDER TAB.
1606	SOLDER TAB TERMINALS SHALL ACCOMMODATE 1606 WIRES.
1607	THE ACCOMMODATED WIRE SIZE SHALL BE 1607 AWG.
1622	THE ACCOMMODATED WIRE SIZE SHALL BE 1622 MILLIMETERS, DIAMETER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
WIRE ACCOMMODATION (CONT)	
ANGLE TERMINALS BENT TO REAR (DEGREES)	1608
ANGLE TERMINALS BENT TO FRONT (DEGREES)	1609
QUICK DISCONNECT SIZE	
SIZE ____	1611
CONNECTOR	
(PART NUMBER)	1613
DOCUMENT (DOC DES)	1614
WIRE LEAD	
WIRE SIZE (SELECT ONE)	
(AWG)	1619
(MILLIMETERS, DIAMETER)	1626
DOCUMENT (DOC DES)	1628
DETENT MECHANISM	
(SPECIFY)	1624
OPERATING SHAFT END STYLE	
(SPECIFY)	1630
KEY OPERATED.	1632

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1608	ANGLE TERMINALS SHALL BE BENT TO THE REAR 1608 DEGREES.
1609	ANGLE TERMINALS SHALL BE BENT TO THE FRONT 1609 DEGREES.
1611	QUICK DISCONNECT SIZE. THE QUICK DISCONNECT SIZE SHALL BE 1611.
	CONNECTOR.
1613	THE CONNECTOR PART NUMBER SHALL BE 1613.
1614	THE CONNECTOR SHALL BE IN ACCORDANCE WITH 1614.
	WIRE LEAD.
1619	THE WIRE LEAD WIRE SIZE SHALL BE 1619 AWG.
1626	THE WIRE LEAD WIRE SIZE SHALL BE 1626 MILLIMETERS, DIAMETER.
1628	THE WIRE LEAD WIRE SHALL BE IN ACCORDANCE WITH 1628.
1624	DETENT MECHANISM. THE DETENT MECHANISM SHALL BE 1624.
1630	OPERATING SHAFT END STYLE. THE OPERATING SHAFT END STYLE SHALL BE 1630.
1632	KEY OPERATED. THE SWITCH SHALL BE KEY OPERATED.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TRUTH TABLE	
NOTE: SEE TRUTH TABLE.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

TRUTH TABLE

READOUT

SYMBOL 3000

	3001	3002	3003	3004	3005	3006	3007	3008	3009	3010	3011
3012	3013	3014	3015	3016	3017	3018	3019	3020	3021	3022	3023
3024	3025	3026	3027	3028	3029	3030	3031	3032	3033	3034	3035
3036	3037	3038	3039	3040	3041	3042	3043	3044	3045	3046	3047
3048	3049	3050	3051	3052	3053	3054	3055	3056	3057	3058	3059
3060	3061	3062	3063	3064	3065	3066	3067	3068	3069	3070	3071
3072	3073	3074	3075	3076	3077	3078	3079	3080	3081	3082	3083
3084	3085	3086	3087	3088	3089	3090	3091	3092	3093	3094	3095
3096	3097	3098	3099	3100	3101	3102	3103	3104	3105	3106	3107
3108	3109	3110	3111	3112	3113	3114	3115	3116	3117	3118	3119
3120	3121	3122	3123	3124	3125	3126	3127	3128	3129	3130	3131
3132	3133	3134	3135	3136	3137	3138	3139	3140	3141	3142	3143
3144	3145	3146	3147	3148	3149	3150	3151	3152	3153	3154	3155
3156	3157	3158	3159	3160	3161	3162	3163	3164	3165	3166	3167
3168	3169	3170	3171	3172	3173	3174	3175	3176	3177	3178	3179
3180	3181	3182	3183	3184	3185	3186	3187	3188	3189	3190	3191
3192	3193	3194	3195	3196	3197	3198	3199	3200	3201	3202	3203

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TRUTH TABLE (CONT)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

TRUTH TABLE (CONT)

READOUT

SYMBOL

	3204	3205	3206	3207	3208	3209	3210	3211	3212	3213	3214
	3215	3216	3217	3218	3219	3220	3221	3222	3223	3224	3225
	3226	3227	3228	3229	3230	3231	3232	3233	3234	3235	3236
	3237	3238	3239	3240	3241	3242	3243	3244	3245	3246	3247
	3248	3249	3250	3251	3252	3253	3254	3255	3256	3257	3258
	3259	3260	3261	3262	3263	3264	3265	3266	3267	3268	3269
	3270	3271	3272	3273	3274	3275	3276	3277	3278	3279	3280
	3281	3282	3283	3284	3285	3286	3287	3288	3289	3290	3291
	3292	3293	3294	3295	3296	3297	3298	3299	3300	3301	3302
	3303	3304	3305	3306	3307	3308	3309	3310	3311	3312	3313
	3314	3315	3316	3317	3318	3319	3320	3321	3322	3323	3324
	3325	3326	3327	3328	3329	3330	3331	3332	3333	3334	3335
	3336	3337	3338	3339	3340	3341	3342	3343	3344	3345	3346
	3347	3348	3349	3350	3351	3352	3353	3354	3355	3356	3357
	3358	3359	3360	3361	3362	3363	3364	3365	3366	3367	3368
	3369	3370	3371	3372	3373	3374	3375	3376	3377	3378	3379
	3380	3381	3382	3383	3384	3385	3386	3387	3388	3389	3390

(A) NOTE: 3391.
(B) NOTE: 3392.
(C) NOTE: 3393.
(D) NOTE: 3394.
(E) NOTE: 3395.
(F) NOTE: 3396.
(G) NOTE: 3397.
(H) NOTE: 3398.
(I) NOTE: 3399.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
WEIGHT	
MAXIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024
NOMINAL WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	6996
(POUNDS)	6997
SI (SELECT ONE)	
(GRAMS)	6998
(KILOGRAMS)	6999

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7023	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).
7021	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).
6996	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6996 OUNCE(S).
6997	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6997 POUND(S).
6998	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6998 GRAM(S).
6999	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6999 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6272
NO EVIDENCE OF PHYSICAL DAMAGE.	6273
REMAIN WITHIN SPECIFIED TOLERANCE.	6277
NO DISCONTINUITY.	7345
NO LAMP IN TEST CIRCUIT SHALL LIGHT.	1547
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6250
PER MIL-STD-202, METHOD 212.	6251
*TEST CONDITION LETTER (SELECT ONE)	
TEST CONDITION LETTER A.	6226
*LEVEL (SELECT ONE)	
20 G'S.	4863
50 G'S.	4864
100 G'S.	4865

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6272	ACCELERATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6272.
6273	ACCELERATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6277	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
7345	THERE SHALL BE NO ELECTRICAL DISCONTINUITY DURING THE TEST.
1547	NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.
6250	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6250.
6251	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 212 OF MIL-STD-202.
6226	TEST CONDITION LETTER A SHALL APPLY.
4863	THE TEST LEVEL SHALL BE 20 G'S.
4864	THE TEST LEVEL SHALL BE 50 G'S.
4865	THE TEST LEVEL SHALL BE 100 G'S.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATION (CONT)	
TEST CONDITION LETTER (CONT)	
TEST CONDITION LETTER B.	6233
*LEVEL (SELECT ONE)	
10,000 G'S.	4868
20,000 G'S.	4892
DIRECTION (SELECT ONE)	
ONE DIRECTION.	1557
BOTH DIRECTIONS.	1558
TEST CONDITION LETTER C.	6239
*LEVEL (G'S.)	4893
MOUNTING (SELECT ONE)	
MOUNT BY ANY SUITABLE METHOD.	6263
MOUNT BY NORMAL METHOD.	6264
MOUNT PER DOCUMENT (DOC DES)	6265
PERCENT RATED LOAD APPLIED (PERCENT)	6210
MONITOR PER METHOD 310 OF MIL-STD-202	
*TEST CIRCUIT (LETTER)	1548
*TEST CONDITION (LETTER)	1549

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6233	TEST CONDITION LETTER B SHALL APPLY.
4868	THE TEST LEVEL SHALL BE 10,000 G'S.
4892	THE TEST LEVEL SHALL BE 20,000 G'S.
1557	THE SPECIMEN SHALL BE ACCELERATED IN ONE DIRECTION ONLY.
1558	THE SPECIMEN SHALL BE ACCELERATED IN BOTH DIRECTIONS.
6239	TEST CONDITION LETTER C SHALL APPLY.
4893	THE TEST LEVEL SHALL BE 4893 G'S.
6263	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
6264	MOUNTING SHALL BE BY THE NORMAL METHOD.
6265	MOUNTING SHALL BE IN ACCORDANCE WITH 6265.
6210	THE ELECTRICAL LOAD SHALL BE 6210 PERCENT OF THE RATED LOAD.
1548	MONITORING DURING THE TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1548 SHALL APPLY.
1549	TEST CONDITION LETTER 1549 IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CAPACITANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1668
AS FOLLOWS:	1662
MAXIMUM CAPACITANCE ACROSS OPEN CONTACTS (PICOFARADS)	1666
MAXIMUM CAPACITANCE FROM OPEN CONTACTS TO GROUND (PICOFARADS)	1672
MAXIMUM CAPACITANCE BETWEEN ADJACENT CLOSED CONTACTS (PICOFARADS)	1678
MAXIMUM CAPACITANCE (PICOFARADS)	1670
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1660
PER MIL-STD-202, METHOD 305.	1682
TEST FREQUENCY (SELECT ONE)	
(HERTZ)	1663
(KILOHERTZ)	1684
(MEGAHERTZ)	1688

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1668	CAPACITANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1668.
1662	CAPACITANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1666	THE CAPACITANCE ACROSS THE OPEN CONTACTS SHALL BE NOT GREATER THAN 1666 PICOFARAD(S).
1672	THE CAPACITANCE FROM THE OPEN CONTACT(S) TO GROUND SHALL BE NOT GREATER THAN 1672 PICOFARAD(S).
1678	THE CAPACITANCE BETWEEN ADJACENT CLOSED CONTACTS SHALL BE NOT GREATER THAN 1678 PICOFARAD(S).
1670	CAPACITANCE SHALL BE NOT GREATER THAN 1670 PICOFARAD(S).
1660	CAPACITANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1660.
1682	CAPACITANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-202, METHOD 305.
1663	THE TEST FREQUENCY SHALL BE 1663 HERTZ.
1684	THE TEST FREQUENCY SHALL BE 1684 KILOHERTZ.
1688	THE TEST FREQUENCY SHALL BE 1688 MEGAHERTZ.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CAPACITANCE (CONT)	
PER MIL-STD-202, METHOD 305. (CONT)	
MAGNITUDE OF POLARIZING VOLTAGE (VOLTS, DC)	1664
PLUS VOLTAGE TOLERANCE (VOLTS, DC)	1690
MINUS VOLTAGE TOLERANCE (VOLTS, DC)	1692
MEASUREMENT ACCURACY (SELECT ONE)	
(PERCENT)	1665
(PICOFARADS)	1694
POINTS OF MEASUREMENT	
BETWEEN OPEN CONTACTS.	1696
BETWEEN ADJACENT CLOSED CONTACTS.	1698
BETWEEN TWO ADJACENT TERMINALS (CONTACTS) ON ONE SWITCH SECTION.	1700
BETWEEN ONE OPEN CONTACT AND ITS COMMON TERMINAL.	1702
BETWEEN COMMON TERMINALS ON ADJACENT SWITCH SECTIONS.	1706
OTHER ____	1708
CIRCUIT CONFIGURATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1730

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1664	THE MAGNITUDE OF THE POLARIZING VOLTAGE SHALL BE 1664 VOLTS, DC.
1690	THE PLUS VOLTAGE TOLERANCE SHALL BE 1690 VOLTS, DC.
1692	THE MINUS VOLTAGE TOLERANCE SHALL BE 1692 VOLTS, DC.
1665	THE ACCURACY OF THE MEASUREMENT SHALL BE 1665 PERCENT.
1694	THE ACCURACY OF THE MEASUREMENT SHALL BE 1694 PICOFARAD(S).
	THE POINTS OF MEASUREMENT SHALL BE AS FOLLOWS:
1696	BETWEEN OPEN CONTACTS.
1698	BETWEEN ADJACENT CLOSED CONTACTS.
1700	BETWEEN TWO ADJACENT TERMINALS (CONTACTS) ON ONE SWITCH SECTION.
1702	BETWEEN ONE OPEN CONTACT AND ITS COMMON TERMINAL.
1706	BETWEEN COMMON TERMINALS ON ADJACENT SWITCH SECTIONS.
1708	1708.
1730	CIRCUIT CONFIGURATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1730.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CIRCUIT CONFIGURATION (CONT)	
REQUIREMENTS (CONT)	
THE SWITCH CIRCUIT SHALL CONFORM TO THE SPECIFIED CONFIGURATION.	1732
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1736
PER DOCUMENT (DOC DES)	1738
AS FOLLOWS:	1740
SWITCHES SHALL BE TESTED TO DETERMINE CONFORMANCE TO THE SPECIFIED CIRCUITRY USING SUITABLE TEST CIRCUITS.	1742
THE TEST CIRCUIT SHALL NOT EMPLOY CURRENT LEVELS THAT CAN ADVERSELY AFFECT SWITCHING CAPABILITIES.	1744
LOAD ____	1746
COIL CURRENT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1750
MAXIMUM COIL CURRENT (AMPERES)	1752

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE | STANDARD PARAGRAPH

1732 CIRCUIT CONFIGURATION. THE SWITCH CIRCUIT SHALL CONFORM TO THE SPECIFIED CONFIGURATION.

1736 CIRCUIT CONFIGURATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1736.

1738 CIRCUIT CONFIGURATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1738.

1740 CIRCUIT CONFIGURATION. TESTING SHALL BE PERFORMED AS FOLLOWS:

1742 SWITCHES SHALL BE TESTED TO DETERMINE CONFORMANCE TO THE SPECIFIED CIRCUITRY USING SUITABLE TEST CIRCUITS.

1744 THE TEST CIRCUIT SHALL NOT EMPLOY CURRENT LEVELS THAT CAN ADVERSELY AFFECT SWITCHING CAPABILITIES.

1746 THE LOAD SHALL BE 1746.

1750 COIL CURRENT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1750.

1752 COIL CURRENT. THE COIL CURRENT SHALL BE NOT GREATER THAN 1752 AMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
COIL CURRENT (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1762
PER DOCUMENT (DOC DES)	1764
TEST VOLTAGE (SELECT ONE)	
(PERCENT OF RATED VOLTAGE)	1766
(VOLTS, DC)	1768
(VOLTS, AC)	1770
MAXIMUM DURATION REQUIRED TO DETERMINE COIL CURRENT (SELECT ONE)	
(SECONDS)	1772
(MINUTES)	1774
TEST TEMPERATURE (DEGREES CELSIUS)	1776
PLUS TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1778
MINUS TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1780

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1762	COIL CURRENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1762.
1764	COIL CURRENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1764.
1766	THE TEST VOLTAGE SHALL BE 1766 PERCENT OF THE RATED VOLTAGE.
1768	THE TEST VOLTAGE SHALL BE 1768 VOLTS, DC.
1770	THE TEST VOLTAGE SHALL BE 1770 VOLTS, AC.
1772	THE DURATION REQUIRED TO DETERMINE THE COIL CURRENT SHALL BE NOT GREATER THAN 1772 SECONDS.
1774	THE DURATION REQUIRED TO DETERMINE THE COIL CURRENT SHALL BE NOT GREATER THAN 1774 MINUTE(S).
1776	THE TEST TEMPERATURE SHALL BE 1776 DEGREES CELSIUS.
1778	THE PLUS TEMPERATURE TOLERANCE SHALL BE 1778 DEGREES CELSIUS.
1780	THE MINUS TEMPERATURE TOLERANCE SHALL BE 1780 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
COINCIDENCE OF OPERATING AND RELEASE POINTS (SIMULTANEITY)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1782
AS FOLLOWS:	1784
ALL CONTACTS TRANSFER WITHIN (MILLISECONDS)	1786
ALL CLOSED CONTACTS SHALL OPEN BEFORE ANY CONTACTS IN THE NEXT POSITION CLOSE.	1788
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1790
PER DOCUMENT (DOC DES)	1792
CONTACT RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1800
AS FOLLOWS:	1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1782	COINCIDENCE OF OPERATING AND RELEASE POINTS (SIMULTANEITY). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1782.
1784	COINCIDENCE OF OPERATING AND RELEASE POINTS (SIMULTANEITY). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1786	ALL CONTACTS SHALL TRANSFER WITHIN 1786 MILLISECOND(S).
1788	ALL CLOSED CONTACTS SHALL OPEN BEFORE ANY CONTACTS IN THE NEXT POSITION CLOSE.
1790	COINCIDENCE OF OPERATING AND RELEASE POINTS (SIMULTANEITY). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1790.
1792	COINCIDENCE OF OPERATING AND RELEASE POINTS (SIMULTANEITY). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1792.
1800	CONTACT RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1800.
1802	CONTACT RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT RESISTANCE (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	1804
(MILLIOHMS)	1704
MAXIMUM VOLTAGE DROP (SELECT ONE)	
(VOLTS)	1806
(MILLIVOLTS)	1808
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1810
PER MIL-STD-202, METHOD 307.	1812
TEST CURRENT (SELECT ONE)	
MAXIMUM RATED CURRENT	1814
(AMPERES)	1816
(MILLIAMPERES)	1818

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1804	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1804 OHMS.
1704	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1704 MILLIOHMS.
1806	THE VOLTAGE DROP SHALL BE NOT GREATER THAN 1806 VOLTS.
1808	THE VOLTAGE DROP SHALL BE NOT GREATER THAN 1808 MILLIVOLTS.
1810	CONTACT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1810.
1812	CONTACT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-202, METHOD 307.
1814	THE TEST CURRENT SHALL BE THE MAXIMUM RATED CURRENT FOR THE CONTACTS.
1816	THE TEST CURRENT SHALL BE 1816 AMPERE(S).
1818	THE TEST CURRENT SHALL BE 1818 MILLIAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 307. (CONT)	
MAXIMUM OPEN CIRCUIT TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	1820
(MILLIVOLTS, DC)	1822
(VOLTS, AC)	1824
(MILLIVOLTS, AC)	1826
NUMBER OF ACTIVATIONS PRIOR TO MEASUREMENT (QUANTITY)	1828
NUMBER OF TEST ACTIVATIONS (QUANTITY)	1830
NUMBER OF MEASUREMENTS PER ACTIVATION (QUANTITY)	1832
MAXIMUM MEASUREMENT ERROR (PERCENT)	1834
METHOD OF CONNECTION ____	1836
CORONA AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1840

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1820	THE OPEN-CIRCUIT TEST VOLTAGE SHALL BE NOT GREATER THAN 1820 VOLTS, DC.
1822	THE OPEN-CIRCUIT TEST VOLTAGE SHALL BE NOT GREATER THAN 1822 MILLIVOLTS, DC.
1824	THE OPEN-CIRCUIT TEST VOLTAGE SHALL BE NOT GREATER THAN 1824 VOLTS, AC.
1826	THE OPEN-CIRCUIT TEST VOLTAGE SHALL BE NOT GREATER THAN 1826 MILLIVOLTS, AC.
1828	THERE SHALL BE 1828 ACTIVATION(S) PRIOR TO MEASUREMENT.
1830	THERE SHALL BE 1830 TEST ACTIVATION(S).
1832	THERE SHALL BE 1832 MEASUREMENT(S) PER ACTIVATION.
1834	THE MEASUREMENT ERROR SHALL BE NOT GREATER THAN 1834 PERCENT.
1836	THE METHOD OF CONNECTION SHALL BE 1836.
1840	CORONA AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1840.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CORONA AT REDUCED BAROMETRIC PRESSURE (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	1880
NO EVIDENCE OF CORONA.	1882
MINIMUM CORONA STARTING VOLTAGE (VOLTS)	1884
MINIMUM CORONA EXTINCTION VOLTAGE (VOLTS)	1881
MAXIMUM APPARENT CORONA CHARGE AT CORONA STARTING VOLTAGE (PICOCOULOMBS)	1883
MAXIMUM CORONA CHARGE (PICOCOULOMBS)	1885
*TEST VOLTAGE (VOLTS)	1887
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1856
PER DOCUMENT (DOC DES)	1886
ALTITUDE PER METHOD 105, MIL-STD-202, TEST CONDITION (LETTER)	1860

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1880	CORONA AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1882	THERE SHALL BE NO EVIDENCE OF CORONA.
1884	THE VOLTAGE AT WHICH CORONA IS CONTINUOUS (CORONA STARTING VOLTAGE) SHALL BE NOT LESS THAN 1884 VOLTS.
1881	THE VOLTAGE AT WHICH CORONA DISAPPEARS COMPLETELY (CORONA EXTINCTION VOLTAGE) SHALL BE NOT LESS THAN 1881 VOLTS.
1883	THE APPARENT CORONA CHARGE SHALL BE NOT GREATER THAN 1883 PICOCOULOMBS AT THE CORONA STARTING VOLTAGE.
1885 1887	THE APPARENT CORONA CHARGE SHALL BE NOT GREATER THAN 1885 PICOCOULOMBS AT 1887 VOLTS.
1856	CORONA AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1856.
1886	CORONA AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1886.
1860	ALTITUDE SHALL BE IN ACCORDANCE WITH METHOD 105 OF MIL-STD-202, TEST CONDITION 1860.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CORONA AT REDUCED BAROMETRIC PRESSURE (CONT)	
PER DOCUMENT (CONT)	
TEST VOLTAGE (SELECT ONE)	
(VOLTS, AC)	1888
FREQUENCY (HERTZ)	1890
(VOLTS, DC)	1892
CORONA AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1686
AS FOLLOWS:	1842
NO EVIDENCE OF CORONA.	1844
MINIMUM CORONA STARTING VOLTAGE (VOLTS)	1846
MINIMUM CORONA EXTINCTION VOLTAGE (VOLTS)	1848
MAXIMUM APPARENT CORONA CHARGE AT CORONA STARTING VOLTAGE (PICOCOULOMBS)	1850
MAXIMUM CORONA CHARGE (PICOCOULOMBS)	1852
*TEST VOLTAGE (VOLTS)	1854

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1888	THE TEST VOLTAGE SHALL BE 1888 VOLTS, AC.
1890	THE AC VOLTAGE FREQUENCY SHALL BE 1890 HERTZ.
1892	THE TEST VOLTAGE SHALL BE 1892 VOLTS, DC.
1686	CORONA AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1686.
1842	CORONA AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1844	THERE SHALL BE NO EVIDENCE OF CORONA.
1846	THE VOLTAGE AT WHICH CORONA IS CONTINUOUS (CORONA STARTING VOLTAGE) SHALL BE NOT LESS THAN 1846 VOLTS.
1848	THE VOLTAGE AT WHICH CORONA DISAPPEARS COMPLETELY (CORONA EXTINCTION VOLTAGE) SHALL BE NOT LESS THAN 1848 VOLTS.
1850	THE APPARENT CORONA CHARGE SHALL BE NOT GREATER THAN 1850 PICOCOULOMBS AT THE CORONA STARTING VOLTAGE.
1852 1854	THE APPARENT CORONA CHARGE SHALL BE NOT GREATER THAN 1852 PICOCOULOMBS AT 1854 VOLTS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CORONA AT SEA LEVEL (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1683
PER DOCUMENT (DOC DES)	1858
TEST VOLTAGE (SELECT ONE)	
(VOLTS, AC)	1862
FREQUENCY (HERTZ)	1864
(VOLTS, DC)	1866
PER ASTMD1868.	1868
MINIMUM EQUIPMENT SENSITIVITY (PICOCOULOMBS)	1870
TEST VOLTAGE (SELECT ONE)	
(AC)	1874
(PERCENT OF RATED)	1876
(DC)	1872
TEST VOLTAGE FREQUENCY (HERTZ)	1877
SUPERIMPOSED TEST VOLTAGE (VOLTS RMS)	1878
*VOLTAGE (VOLTS, DC)	1879

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1683	CORONA AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1683.
1858	CORONA AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1858.
1862	THE TEST VOLTAGE SHALL BE 1862 VOLTS, AC.
1864	THE AC VOLTAGE FREQUENCY SHALL BE 1864 HERTZ.
1866	THE TEST VOLTAGE SHALL BE 1866 VOLTS, DC.
1868	CORONA AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD1868.
1870	THE EQUIPMENT SHALL HAVE A SENSITIVITY CAPABLE OF DETECTING A PULSE LEVEL OF 1870 PICOCOULOMBS OR LARGER.
1874	THE TEST VOLTAGE SHALL BE 1874 VOLTS, AC.
1876	THE TEST VOLTAGE SHALL BE 1876 PERCENT OF RATED VOLTAGE.
1872	THE TEST VOLTAGE SHALL BE 1872 VOLTS, DC.
1877	THE FREQUENCY OF THE AC VOLTAGE SHALL BE 1877 HERTZ.
1878 1879	THE TEST VOLTAGE SHALL BE 1878 VOLTS RMS SUPERIMPOSED ON A DC VOLTAGE OF 1879 VOLTS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4908
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4906
MAXIMUM LEAKAGE (MILLIAMPERES)	4894
REMAIN WITHIN SPECIFIED TOLERANCE.	4901
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4884
PER MIL-STD-202, METHOD 301.	6300
*ALTITUDE PER METHOD 105 OF MIL-STD-202	
*TEST CONDITION (LETTER)	4886
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4885
(VOLTS, AC)	4849

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4908	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4908.
4906	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4894	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4894 MILLIAMPERE(S).
4901	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4884	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4884.
6300	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.
4886	ALTITUDE SHALL BE IN ACCORDANCE WITH TEST CONDITION LETTER 4886 OF METHOD 105 OF MIL-STD-202.
4885	TEST VOLTAGE SHALL BE 4885 VOLTS, DC.
4849	TEST VOLTAGE SHALL BE 4849 VOLTS, AC.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
POINT OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	6311
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	6312
BETWEEN MUTUALLY INSULATED PARTS.	6292
BETWEEN ALL INSULATED PARTS AND GROUND.	6293
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	6294
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4859
DURATION OF VOLTAGE APPLICATION (SECONDS)	4891
MOUNTING PER DOCUMENT (DOC DES)	6280
REGULATION OF TEST VOLTAGE (PERCENT)	6308
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4900

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	POINT(S) OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
6311	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
6312	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
6292	BETWEEN MUTUALLY INSULATED PARTS.
6293	BETWEEN ALL INSULATED PARTS AND GROUND.
6294	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
4859	SPECIAL PREPARATION SHALL BE IN ACCORDANCE WITH 4859.
4891	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4891 SECOND(S).
6280	MOUNTING SHALL BE IN ACCORDANCE WITH 6280.
6308	REGULATION OF THE TEST VOLTAGE SHALL BE WITHIN 6308 PERCENT.
4900	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4900 KILOVOLTAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4902
(MILLIAMPERES)	6310
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4874
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4856
MAXIMUM LEAKAGE (MILLIAMPERES)	4875
REMAIN WITHIN SPECIFIED TOLERANCE.	4847
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4861
PER MIL-STD-202, METHOD 301.	4862

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4902 THE SURGE CURRENT SHALL BE NOT GREATER THAN 4902 AMPERE(S).

6310 THE SURGE CURRENT SHALL BE NOT GREATER THAN 6310 MILLIAMPERE(S).

4874 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.

4856 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.

4875 THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4875 MILLIAMPERE(S).

4847 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

4861 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861.

4862 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4854
(VOLTS, AC)	4855
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	4842
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	4848
BETWEEN MUTUALLY INSULATED PARTS.	4844
BETWEEN ALL INSULATED PARTS AND GROUND.	4845
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	4846
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4850
DURATION OF VOLTAGE APPLICATION (SECONDS)	4867
MOUNTING PER DOCUMENT (DOC DES)	5000
REGULATION OF TEST VOLTAGE (PERCENT)	4869
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4870

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4854	TEST VOLTAGE SHALL BE 4854 VOLTS, DC.
4855	TEST VOLTAGE SHALL BE 4855 VOLTS, AC.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
4842	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
4848	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
4844	BETWEEN MUTUALLY INSULATED PARTS.
4845	BETWEEN ALL INSULATED PARTS AND GROUND.
4846	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
4850	SPECIAL PREPARATION OR CONDITIONS SHALL BE IN ACCORDANCE WITH 4850.
4867	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4867 SECOND(S).
5000	MOUNTING SHALL BE IN ACCORDANCE WITH 5000.
4869	REGULATION OF TEST VOLTAGE SHALL BE WITHIN 4869 PERCENT.
4870	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4870 KILOVOLTAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4717
(MILLIAMPERES)	4897
METHOD OF VOLTAGE CONNECTION PER DOCUMENT (DOC DES)	6267
ELECTROMAGNETIC INTERFERENCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3810
PER MIL-STD-461 LIMITS.	3812
NO ELECTRICAL OR MECHANICAL MALFUNCTION.	3814
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3820
PER MIL-STD-461, APPENDIX METHOD (DESIGNATION)	3822

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currenversion before use.

CHAR CODE	STANDARD PARAGRAPH
4717	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4717 AMPERE(S).
4897	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4897 MILLIAMPERE(S).
6267	METHOD OF CONNECTION OF TEST VOLTAGE SHALL BE IN ACCORDANCE WITH 6267.
3810	ELECTROMAGNETIC INTERFERENCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3810.
3812	ELECTROMAGNETIC INTERFERENCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE LIMITS PER MIL-STD-461.
3814	THERE SHALL BE NO ELECTRICAL OR MECHANICAL MALFUNCTION.
3820	ELECTROMAGNETIC INTERFERENCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3820.
3822	ELECTROMAGNETIC INTERFERENCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE MIL-STD-461 APPENDIX. METHOD 3822 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELECTROMAGNETIC INTERFERENCE (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-462.	3824
*TEST METHODS	
CE (NUMBER)	3826
RE (NUMBER)	3828
CS (NUMBER)	3830
RS (NUMBER)	3832
CRE (NUMBER)	3834
ENDURANCE, ELECTRICAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1900
AS FOLLOWS:	1902
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(MILLIOHMS)	1906
(OHMS)	1904
NO EVIDENCE OF MALFUNCTION.	1910
REMAIN WITHIN SPECIFIED TOLERANCES.	1908

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

3824 ELECTROMAGNETIC INTERFERENCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-462. THE FOLLOWING METHOD(S) SHALL APPLY:

3826 METHOD CE 3826.

3828 METHOD RE 3828.

3830 METHOD CS 3830.

3832 METHOD RS 3832.

3834 METHOD CRE 3834.

1900 ENDURANCE, ELECTRICAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1900.

1902 ENDURANCE, ELECTRICAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

1906 THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1906 MILLIOHMS.

1904 THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1904 OHM(S).

1910 THERE SHALL BE NO EVIDENCE OF MALFUNCTION.

1908 THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE(S).

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE, ELECTRICAL (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1912
PER DOCUMENT (DOC DES)	1914
OPERATING CYCLES (QUANTITY)	1916
APPLIED VOLTAGE (SELECT ONE)	
(VOLTS, AC)	1918
(VOLTS, DC)	1920
LOAD (PERCENT OF RATED LOAD)	1922
LOAD (TYPE)	1924
TEST CYCLE RATE (CYCLES PER MINUTE)	1926
ENDURANCE, MECHANICAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3600
AS FOLLOWS:	3602
REMAIN WITHIN SPECIFIED TOLERANCES.	3604
NO EVIDENCE OF MALFUNCTION.	3606
NO EVIDENCE OF DAMAGE.	3608

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1912	ENDURANCE, ELECTRICAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1912.
1914	ENDURANCE, ELECTRICAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1914.
1916	THERE SHALL BE 1916 OPERATING CYCLES.
1918	THE APPLIED VOLTAGE SHALL BE 1918 VOLTS, AC.
1920	THE APPLIED VOLTAGE SHALL BE 1920 VOLTS, DC.
1922	THE LOAD SHALL BE 1922 PERCENT OF THE RATED LOAD.
1924	THE LOAD TYPE SHALL BE 1924.
1926	THE TEST CYCLE RATE SHALL BE 1926 CYCLES PER MINUTE.
3600	ENDURANCE, MECHANICAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3600.
3602	ENDURANCE, MECHANICAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3604	THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE(S).
3606	THERE SHALL BE NO EVIDENCE OF MALFUNCTION.
3608	THERE SHALL BE NO EVIDENCE OF DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE, MECHANICAL (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3610
PER DOCUMENT (DOC DES)	3612
OPERATING CYCLES (QUANTITY)	3614
TEST CYCLE RATE (CYCLES PER MINUTE)	3616
EXPLOSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1680
AS FOLLOWS:	1928
REMAIN ELECTRICALLY AND MECHANICALLY OPERATIVE.	1930
NO EXPLOSION WITHIN SWITCH OR CHAMBER.	1932
NO EXPLOSION IN CHAMBER WHETHER OR NOT EXPLOSION OCCURS IN SWITCH.	1934
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1674

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3610	ENDURANCE, MECHANICAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3610.
3612	ENDURANCE, MECHANICAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3612.
3614	THERE SHALL BE 3614 OPERATING CYCLES.
3616	THE TEST CYCLE RATE SHALL BE 3616 CYCLES PER MINUTE.
1680	EXPLOSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1680.
1928	EXPLOSION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1930	SWITCHES SHALL BE ELECTRICALLY AND MECHANICALLY OPERATIVE AFTER TEST.
1932	THERE SHALL BE NO EXPLOSION WITHIN THE SWITCH OR CHAMBER.
1934	THERE SHALL BE NO EXPLOSION IN THE CHAMBER WHETHER OR NOT EXPLOSION OCCURS IN THE SWITCH.
1674	EXPLOSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1674.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
EXPLOSION (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 109.	1936
LOAD (PERCENT OF RATED LOAD)	1938
LOAD (TYPE)	1940
CHAMBER TEMPERATURE (DEGREES CELSIUS)	1676
PLUS TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1942
MINUS TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1944
TEST VOLTAGE (SELECT ONE)	
(VOLTS, AC)	1946
FREQUENCY (HERTZ)	1948
(VOLTS, DC)	1950
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4760

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1936	EXPLOSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-202, METHOD 109.
1938	THE LOAD SHALL BE 1938 PERCENT OF THE RATED LOAD.
1940	THE LOAD TYPE SHALL BE 1940.
1676	THE CHAMBER TEMPERATURE SHALL BE 1676 DEGREES CELSIUS.
1942	THE PLUS TEMPERATURE TOLERANCE SHALL BE 1942 DEGREES CELSIUS.
1944	THE MINUS TEMPERATURE TOLERANCE SHALL BE 1944 DEGREES CELSIUS.
1946	THE TEST VOLTAGE SHALL BE 1946 VOLTS AC.
1948	THE AC VOLTAGE FREQUENCY SHALL BE 1948 HERTZ.
1950	THE TEST VOLTAGE SHALL BE 1950 VOLTS DC.
4760	FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FUNGUS (CONT)	
REQUIREMENTS (CONT)	
FUNGUS RESISTANT BY CERTIFICATION OR BY TEST.	4761
NO EVIDENCE OF FUNGUS GROWTH WHEN TESTED.	4762
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4754
PER MIL-STD-810, METHOD 508.	4755
TEST PERIOD (DAYS)	4756
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4798
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	4799

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4761	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED, THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4762	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4754	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.
4755	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.
4756	TEST PERIOD SHALL BE 4756 DAY(S).
4798	HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.
4799	HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE. (CONT)	
NO DEGRADATION OF PERFORMANCE.	4815
REMAIN WITHIN SPECIFIED TOLERANCE.	4791
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1477
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	4795
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	4805
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	4813
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	4803
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4788
PER MIL-STD-202, METHOD 103.	4853

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4815	THERE SHALL BE NO DEGRADATION OF PERFORMANCE.
4791	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1477	THERE SHALL BE NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DIELECTRIC WITHSTANDING VOLTAGE IS PERFORMED.
4795	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4795 MEGOHM(S) AT HIGH HUMIDITY.
4805	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4805 MEGOHM(S) AFTER DRYING.
4813	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4813 MILLIAMPERE(S) AT HIGH HUMIDITY.
4803	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4803 MILLIAMPERE(S) AFTER DRYING.
4788	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.
4853	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 103 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
PER MIL-STD-202, METHOD 103. (CONT)	
*TEST CONDITION (LETTER)	4890
POLARIZING VOLTAGE (VOLTS, DC)	4793
DURATION OF POLARIZING VOLTAGE APPLICATION (HOURS)	4790
POINTS OF APPLICATION OF POLARIZING VOLTAGE:	
BETWEEN MUTUALLY INSULATED PARTS.	4969
BETWEEN ALL INSULATED PARTS AND GROUND.	4970
BETWEEN CURRENT CARRYING PARTS AND CASE.	4971
BETWEEN CURRENT CARRYING PARTS AND GROUND.	6202
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	6207
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	6206
IMMERSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4819

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4890	TEST CONDITION LETTER 4890 SHALL APPLY.
4793	MAGNITUDE OF THE POLARIZING VOLTAGE SHALL BE 4793 VOLTS, DC.
4790	DURATION OF APPLICATION OF VOLTAGE SHALL BE 4790 HOUR(S).
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
4969	BETWEEN MUTUALLY INSULATED PARTS.
4970	BETWEEN ALL INSULATED PARTS AND GROUND.
4971	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
6202	BETWEEN CURRENT CARRYING PARTS AND GROUND.
6207	DIELECTRIC WITHSTANDING VOLTAGE TEST SHALL BE PERFORMED AT HIGH HUMIDITY.
6206	DIELECTRIC WITHSTANDING VOLTAGE TEST SHALL BE PERFORMED AFTER DRYING.
4819	IMMERSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4819.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMMERSION (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE.	4820
REMAIN WITHIN SPECIFIED TOLERANCE.	4822
MINIMUM INSULATION RESISTANCE (MEGOHMS)	4825
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4809
PER MIL-STD-202, METHOD 104.	4810
*TEST CONDITION (LETTER)	4811
MEASUREMENTS AFTER FINAL CYCLE (HOURS)	4812
TIME BEFORE MEASUREMENTS AFTER FINAL CYCLE (HOURS)	4814
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1380
AS FOLLOWS:	6359

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
4820	IMMERSION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4822	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4825	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 4825 MEGOHM(S).
4809	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4809.
4810	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 104 OF MIL-STD-202.
4811	TEST CONDITION LETTER 4811 SHALL APPLY.
4812	FINAL MEASUREMENT(S) SHALL BE MADE WITHIN 4812 HOUR(S) AFTER FINAL CYCLE.
4814	MEASUREMENTS SHALL NOT BE MADE UNTIL 4814 HOUR(S) AFTER THE FINAL CYCLE.
1380	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.
6359	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
AS FOLLOWS: (CONT)	
*MINIMUM INSULATION RESISTANCE (SELECT ONE)	
SINGLE TEST	
(MEGOHMS)	1386
MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	1384
*SECOND TEST (MEGOHMS)	1387
REMAIN WITHIN SPECIFIED TOLERANCE.	1388
NO EVIDENCE OF PHYSICAL DAMAGE.	1407
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1371
PER MIL-STD-202, METHOD 302.	1511
*CONDITION (SELECT ONE)	
TEST CONDITION (LETTER)	1378
TEST VOLTAGE (VOLTS, DC)	1373
ELECTRIFICATION DURATION (SECONDS)	1376

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1386	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 1386 MEGOHM(S).
1384	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1384 MEGOHM(S) AT THE FIRST TEST TEMPERATURE.
1387	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1387 MEGOHM(S) AT THE SECOND TEST TEMPERATURE.
1388	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1407	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1371	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.
1511	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 302 OF MIL-STD-202.
1378	TEST CONDITION LETTER 1378 SHALL APPLY.
1373	TEST POTENTIAL SHALL BE 1373 VOLTS, DC.
1376	ELECTRIFICATION DURATION SHALL BE 1376 SECOND(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 302. (CONT)	
MAXIMUM MEASUREMENT ERROR AT REQUIRED VALUE (PERCENT)	1377
POINTS OF APPLICATION OF TEST VOLTAGE:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	1497
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	1498
BETWEEN MUTUALLY INSULATED PARTS.	1522
BETWEEN INSULATED PARTS AND GROUND.	1523
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	1524
SPECIAL PREPARATIONS OR CONDITIONS PER DOCUMENT (DOC DES)	1520
FIRST TEST TEMPERATURE (DEGREES CELSIUS)	1372
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	1381
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1383

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1377	THE MEASUREMENT ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1377 PERCENT.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
1497	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
1498	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
1522	BETWEEN MUTUALLY INSULATED PARTS.
1523	BETWEEN ALL INSULATED PARTS AND GROUND.
1524	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
1520	SPECIAL PREPARATIONS OR CONDITIONS SHALL BE IN ACCORDANCE WITH 1520.
1372	FIRST TEST TEMPERATURE SHALL BE 1372 DEGREES CELSIUS.
1381	SECOND TEST TEMPERATURE SHALL BE 1381 DEGREES CELSIUS.
1383	TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1383 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INTERMEDIATE CURRENT SWITCHING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1952
AS FOLLOWS:	1954
REMAIN WITHIN SPECIFIED TOLERANCES.	1956
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	1958
(MILLIOHMS)	1960
MAXIMUM CONTACT VOLTAGE DROP (SELECT ONE)	
(VOLTS)	1962
(MILLIVOLTS)	1964
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1966
PER MIL-STD-202, METHOD 312.	1968

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1952	INTERMEDIATE CURRENT SWITCHING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1952.
1954	INTERMEDIATE CURRENT SWITCHING. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1956	THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE(S).
1958	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1958 OHMS.
1960	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1960 MILLIOHMS.
1962	THE VOLTAGE DROP ACROSS CLOSED CONTACTS SHALL BE NOT GREATER THAN 1962 VOLT(S).
1964	THE VOLTAGE DROP ACROSS CLOSED CONTACTS SHALL BE NOT GREATER THAN 1964 MILLIVOLT(S).
1966	INTERMEDIATE CURRENT SWITCHING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1966.
1968	INTERMEDIATE CURRENT SWITCHING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 312 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INTERMEDIATE CURRENT SWITCHING (CONT)	
PER MIL-STD-202, METHOD 312. (CONT)	
MINIMUM VOLTAGE ACROSS OPEN CONTACTS (SELECT ONE)	
PERCENT OF APPLIED LOAD VOLTAGE (PERCENT)	1970
(VOLTS, AC)	1972
(VOLTS, DC)	1974
NUMBER OF OPERATIONS (QUANTITY)	1976
CYCLING RATE (CYCLES PER MINUTE)	1978
PLUS CYCLING RATE TOLERANCE (CYCLES PER MINUTE)	1980
MINUS CYCLING RATE TOLERANCE (CYCLES PER MINUTE)	1982
CYCLE "ON" AND "OFF" DURATION	
"ON" (PERCENT OF CYCLE)	1984
"OFF" (PERCENT OF CYCLE)	1986
MONITORING OF CONTACTS FOR STICKING IS NOT APPLICABLE.	1988
FINAL HALF OF CYCLES ARE TO BE TESTED AT ROOM TEMPERATURE.	1990
MAXIMUM AMBIENT TEMPERATURE (DEGREES CELSIUS)	1992

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1970	THE VOLTAGE ACROSS THE OPEN CONTACTS SHALL BE NOT LESS THAN 1970 PERCENT OF THE APPLIED LOAD VOLTAGE.
1972	THE VOLTAGE ACROSS THE OPEN CONTACTS SHALL BE NOT LESS THAN 1972 VOLTS, AC.
1974	THE VOLTAGE ACROSS THE OPEN CONTACTS SHALL BE NOT LESS THAN 1974 VOLTS, DC.
1976	THERE SHALL BE 1976 OPERATIONS.
1978	THE CYCLING RATE SHALL BE 1978 CYCLES PER MINUTE.
1980	THE PLUS CYCLING RATE TOLERANCE SHALL BE 1980 CYCLE(S) PER MINUTE.
1982	THE MINUS CYCLING RATE TOLERANCE SHALL BE 1982 CYCLE(S) PER MINUTE.
	THE CYCLE 'ON' AND 'OFF' DURATION(S) SHALL BE AS FOLLOWS:
1984	'ON' 1984 PERCENT OF THE CYCLE.
1986	'OFF' 1986 PERCENT OF THE CYCLE.
1988	MONITORING OF CONTACTS FOR STICKING IS NOT APPLICABLE.
1990	THE FINAL HALF OF THE CYCLES SHALL BE TESTED AT ROOM TEMPERATURE.
1992	THE AMBIENT TEMPERATURE SHALL BE NOT GREATER THAN 1992 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LIFE (ROTATIONAL) AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2110
AS FOLLOWS:	2112
NO EVIDENCE OF PHYSICAL DAMAGE.	2114
MAXIMUM CHANGE IN ROTATIONAL TORQUE FROM INITIAL VALUE AS FOLLOWS:	
PLUS (PERCENT)	2116
MINUS (PERCENT)	2118
NO EVIDENCE OF INTERMITTANT OPERATION.	2120
NO LOOSE PARTS.	2122
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2124
PER MIL-STD-202, METHOD 206.	2125
ALTITUDE PER METHOD 105, MIL-STD-202, TEST CONDITION (LETTER)	2126

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2110	LIFE (ROTATIONAL) AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2110.
2112	LIFE (ROTATIONAL) AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2114	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
	THE CHANGE IN ROTATIONAL TORQUE SHALL BE NOT GREATER THAN THE FOLLOWING:
2116	PLUS 2116 PERCENT.
2118	MINUS 2118 PERCENT.
2120	THERE SHALL BE NO EVIDENCE OF INTERMITTANT OPERATION.
2122	THERE SHALL BE NO LOOSE PARTS.
2124	LIFE (ROTATIONAL) AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2124.
2125	LIFE (ROTATIONAL) AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-202, METHOD 206.
2126	ALTITUDE SHALL BE IN ACCORDANCE WITH METHOD 105 OF MIL-STD-202, TEST CONDITION 2126.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LIFE (ROTATIONAL) AT REDUCED BAROMETRIC PRESSURE (CONT)	
PER MIL-STD-202, METHOD 206. (CONT)	
NUMBER OF CYCLES (SELECT ONE)	
TEST CONDITION OF METHOD 206 (LETTER)	2128
(QUANTITY)	2130
CYCLE RATE (CYCLES PER MINUTE)	2132
TEST VOLTAGE (SELECT ONE)	
(PERCENT OF RATE VOLTAGE)	2134
(VOLTS, AC)	2136
(VOLTS, DC)	2138
LOAD (SELECT ONE)	
(PERCENT OF RATED LOAD)	2140
(AMPERES)	2142
(MILLIAMPERES)	2144
TEST TEMPERATURE (DEGREES CELSIUS)	2146
METHOD OF MOUNTING (SPECIFY)	2148

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2128	TEST CONDITION LETTER 2128 SHALL APPLY.
2130	THERE SHALL BE 2130 CYCLES.
2132	THE CYCLE RATE SHALL BE 2132 CYCLES PER MINUTE.
2134	THE TEST VOLTAGE SHALL BE 2134 PERCENT OF THE RATED VOLTAGE.
2136	THE TEST VOLTAGE SHALL BE 2136 VOLTS, AC.
2138	THE TEST VOLTAGE SHALL BE 2138 VOLTS, DC.
2140	THE TEST LOAD SHALL BE 2140 PERCENT OF THE RATED LOAD.
2142	THE TEST LOAD SHALL BE 2142 AMPERE(S).
2144	THE TEST LOAD SHALL BE 2144 MILLIAMPERE(S).
2146	THE TEST TEMPERATURE SHALL BE 2146 DEGREES CELSIUS.
2148	THE METHOD OF MOUNTING SHALL BE 2148.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LIFE (ROTATIONAL) AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1719
AS FOLLOWS:	2150
NO EVIDENCE OF PHYSICAL DAMAGE.	2152
MAXIMUM CHANGE IN ROTATIONAL TORQUE FROM INITIAL VALUE AS FOLLOWS:	
PLUS (PERCENT)	2154
MINUS (PERCENT)	2156
NO EVIDENCE OF INTERMITTANT OPERATION.	2158
NO LOOSE PARTS.	2160
MAXIMUM CONTACT RESISTANCE (MILLIOHMS)	1721
MINIMUM INSULATION RESISTANCE (MEGOHMS)	1722
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1711
PER MIL-STD-202, METHOD 206.	2162

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1719	LIFE (ROTATIONAL) AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1719.
2150	LIFE (ROTATIONAL) AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2152	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
	THE CHANGE IN ROTATIONAL TORQUE SHALL BE NOT GREATER THAN THE FOLLOWING:
2154	PLUS 2154 PERCENT.
2156	MINUS 2156 PERCENT.
2158	THERE SHALL BE NO EVIDENCE OF INTERMITTANT OPERATION.
2160	THERE SHALL BE NO LOOSE PARTS.
1721	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1721 MILLIOHMS.
1722	THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 1722 MEGOHMS.
1711	LIFE (ROTATIONAL) AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1711.
2162	LIFE (ROTATIONAL) AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-202, METHOD 206.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LIFE (ROTATIONAL) AT SEA LEVEL (CONT)	
PER MIL-STD-202, METHOD 206. (CONT)	
NUMBER OF CYCLES (SELECT ONE)	
TEST CONDITION (LETTER)	1712
(QUANTITY)	2164
CYCLE RATE (CYCLES PER MINUTE)	1714
TEST VOLTAGE (SELECT ONE)	
(PERCENT OF RATED VOLTAGE)	2166
(VOLTS, AC)	2168
(VOLTS, DC)	2170
LOAD (SELECT ONE)	
(PERCENT OF RATED LOAD)	2172
(AMPERES)	2174
(MILLIAMPERES)	2176
TEST TEMPERATURE (DEGREES CELSIUS)	1713
METHOD OF MOUNTING	2178

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1712	TEST CONDITION LETTER 1712 SHALL APPLY.
2164	THERE SHALL BE 2164 CYCLES.
1714	THE CYCLE RATE SHALL BE 1714 CYCLES PER MINUTE.
2166	THE TEST VOLTAGE SHALL BE 2166 PERCENT OF THE RATED VOLTAGE.
2168	THE TEST VOLTAGE SHALL BE 2168 VOLTS, AC.
2170	THE TEST VOLTAGE SHALL BE 2170 VOLTS, DC.
2172	THE TEST LOAD SHALL BE 2172 PERCENT OF THE RATED LOAD.
2174	THE TEST LOAD SHALL BE 2174 AMPERE(S).
2176	THE TEST LOAD SHALL BE 2176 MILLIAMPERE(S).
1713	THE TEST TEMPERATURE SHALL BE 1713 DEGREES CELSIUS.
2178	THE METHOD OF MOUNTING SHALL BE 2178.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LIFE, LOW LEVEL SWITCHING AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2180
AS FOLLOWS:	2182
"MISSES" ALLOWED (QUANTITY)	2184
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	2186
(MILLIOHMS)	2188
MAXIMUM CONTACT VOLTAGE DROP (SELECT ONE)	
(VOLTS)	2190
(MILLIVOLTS)	2192
REMAIN WITHIN SPECIFIED TOLERANCES.	2194
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2200

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2180	LIFE, LOW LEVEL SWITCHING AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2180.
2182	LIFE, LOW LEVEL SWITCHING AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2184	THERE SHALL BE 2184 'MISS(S)' ALLOWED.
2186	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2186 OHM(S).
2188	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2188 MILLIOHMS.
2190	THE CLOSED CONTACTS VOLTAGE DROP SHALL BE NOT GREATER THAN 2190 VOLT(S).
2192	THE CLOSED CONTACTS VOLTAGE DROP SHALL BE NOT GREATER THAN 2192 MILLIVOLTS.
2194	THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE(S).
2200	LIFE, LOW LEVEL SWITCHING AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2200.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LIFE, LOW LEVEL SWITCHING AT REDUCED BAROMETRIC PRESSURE (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 311.	2202
*ALTITUDE PER METHOD 105, MIL-STD-202, TEST CONDITION (LETTER)	2204
MAXIMUM LOAD CURRENT (SELECT ONE)	
(MILLIAMPERES)	2208
(AMPERES)	2206
MAXIMUM LOAD VOLTAGE (SELECT ONE)	
(VOLTS, DC)	2210
(MILLIVOLTS, DC)	2212
(VOLTS, AC)	2214
(MILLIVOLTS, AC)	2216
CONTACTS SHALL BE MONITORED FOR STICKING.	2218
TEST CYCLES (QUANTITY)	2220

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2202	LIFE, LOW LEVEL SWITCHING AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 311 OF MIL-STD-202.
2204	ALTITUDE SHALL BE IN ACCORDANCE WITH METHOD 105 OF MIL-STD-202, TEST CONDITION 2204.
2208	THE LOAD CURRENT SHALL BE NOT GREATER THAN 2208 MILLIAMPERES.
2206	THE LOAD CURRENT SHALL BE NOT GREATER THAN 2206 AMPERE(S).
2210	THE LOAD VOLTAGE SHALL BE NOT GREATER THAN 2210 VOLTS(S), DC.
2212	THE LOAD VOLTAGE SHALL BE NOT GREATER THAN 2212 MILLIVOLTS, DC.
2214	THE LOAD VOLTAGE SHALL BE NOT GREATER THAN 2214 VOLT(S), AC.
2216	THE LOAD VOLTAGE SHALL BE NOT GREATER THAN 2216 MILLIVOLTS, AC.
2218	CONTACTS SHALL BE MONITORED FOR STICKING.
2220	THERE SHALL BE 2220 TEST CYCLES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LIFE, LOW LEVEL SWITCHING AT REDUCED BAROMETRIC PRESSURE (CONT)	
PER MIL-STD-202, METHOD 311. (CONT)	
TEST CYCLE RATE (CYCLES PER MINUTE)	2222
PLUS CYCLE RATE TOLERANCE (CYCLES PER MINUTE)	2224
MINUS CYCLE RATE TOLERANCE (CYCLES PER MINUTE)	2226
LIFE, LOW LEVEL SWITCHING AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2230
AS FOLLOWS:	2232
"MISSES" ALLOWED (QUANTITY)	2234
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	2236
(MILLIOHMS)	2238
MAXIMUM CONTACT VOLTAGE DROP (SELECT ONE)	
(VOLTS)	2240
(MILLIVOLTS)	2242
REMAIN WITHIN SPECIFIED TOLERANCES.	2244

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2222	THE TEST CYCLE RATE SHALL BE 2222 CYCLES PER MINUTE.
2224	THE PLUS CYCLE RATE TOLERANCE SHALL BE 2224 CYCLES PER MINUTE.
2226	THE MINUS CYCLE RATE TOLERANCE SHALL BE 2226 CYCLES PER MINUTE.
2230	LIFE, LOW LEVEL SWITCHING AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2230.
2232	LIFE, LOW LEVEL SWITCHING AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2234	THERE SHALL BE 2234 'MISS(S)' ALLOWED.
2236	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2236 OHM(S).
2238	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2238 MILLIOHMS.
2240	THE CLOSED CONTACTS VOLTAGE DROP SHALL BE NOT GREATER THAN 2240 VOLT(S).
2242	THE CLOSED CONTACTS VOLTAGE DROP SHALL BE NOT GREATER THAN 2242 MILLIVOLTS.
2244	THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LIFE, LOW LEVEL SWITCHING AT SEA LEVEL (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2250
PER MIL-STD-202, METHOD 311.	2252
MAXIMUM LOAD CURRENT (SELECT ONE)	
(AMPERES)	2254
(MILLIAMPERES)	2256
MAXIMUM LOAD VOLTAGE (SELECT ONE)	
(VOLTS, DC)	2258
(MILLIVOLTS, DC)	2260
(VOLTS, AC)	2262
(MILLIVOLTS, AC)	2264
CONTACTS SHALL BE MONITORED FOR STICKING.	2266
TEST CYCLES (QUANTITY)	2268

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2250	LIFE, LOW LEVEL SWITCHING AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2250.
2252	LIFE, LOW LEVEL SWITCHING AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 311 OF MIL-STD-202.
2254	THE LOAD CURRENT SHALL BE NOT GREATER THAN 2254 AMPERE(S).
2256	THE LOAD CURRENT SHALL BE NOT GREATER THAN 2256 MILLIAMPERES.
2258	THE LOAD VOLTAGE SHALL BE NOT GREATER THAN 2258 VOLT(S), DC.
2260	THE LOAD VOLTAGE SHALL BE NOT GREATER THAN 2260 MILLIVOLTS, DC.
2262	THE LOAD VOLTAGE SHALL BE NOT GREATER THAN 2262 VOLT(S), AC.
2264	THE LOAD VOLTAGE SHALL BE NOT GREATER THAN 2264 MILLIVOLTS, AC.
2266	CONTACTS SHALL BE MONITORED FOR STICKING.
2268	THERE SHALL BE 2268 TEST CYCLES.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LIFE, LOW LEVEL SWITCHING AT SEA LEVEL (CONT)	
PER MIL-STD-202, METHOD 311. (CONT)	
TEST CYCLE RATE (CYCLES PER MINUTE)	2270
PLUS CYCLE RATE TOLERANCE (CYCLES PER MINUTE)	2272
MINUS CYCLE RATE TOLERANCE (CYCLES PER MINUTE)	2274
MOISTURE RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1400
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	1396
REMAIN WITHIN SPECIFIED TOLERANCE.	1398
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1394
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	1429
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	1404

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2270	THE TEST CYCLE RATE SHALL BE 2270 CYCLES PER MINUTE.
2272	THE PLUS CYCLE RATE TOLERANCE SHALL BE 2272 CYCLES PER MINUTE.
2274	THE MINUS CYCLE RATE TOLERANCE SHALL BE 2274 CYCLES PER MINUTE.
1400	MOISTURE RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1400.
1396	MOISTURE RESISTANCE. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
1398	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1394	THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING OR INSULATION BREAKDOWN, WHEN DIELECTRIC WITHSTANDING VOLTAGE IS APPLIED.
1429	CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1429 MILLIAMPERE(S) AT HIGH HUMIDITY.
1404	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1404 MILLIAMPERE(S) AFTER DRYING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE (CONT)	
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE. (CONT)	
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	1432
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	1406
MAXIMUM CONTACT RESISTANCE (MILLIOHMS)	2276
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1391
PER MIL-STD-202, METHOD 106.	1397
POLARIZING VOLTAGE (VOLTS, DC)	1395
LOADING VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4981
(VOLTS, AC)	4980
PERCENT OF SAMPLE SUBJECTED TO POLARIZING VOLTAGE (PERCENT)	4991

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
1432	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1432 MEGOHM(S) AT HIGH HUMIDITY.
1406	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1406 MEGOHM(S) AFTER DRYING.
2276	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2276 MILLIOHM(S).
1391	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1391.
1397	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 106 OF MIL-STD-202.
1395	POLARIZING VOLTAGE SHALL BE 1395 VOLTS, DC.
4981	LOADING VOLTAGE SHALL BE 4981 VOLTS, DC.
4980	LOADING VOLTAGE SHALL BE 4980 VOLTS, AC.
4991	4991 PERCENT OF THE SAMPLE SHALL BE SUBJECTED TO THE POLARIZING VOLTAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 106. (CONT)	
STEP 7A NOT APPLICABLE.	4985
STEP 7B NOT APPLICABLE.	4986
MOUNT PER DOCUMENT (DOC DES)	1449
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	4983
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	4984
OVERLOAD	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2280
AS FOLLOWS:	2282
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	2284
(MILLIOHMS)	2286

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4985	STEP 7A OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
4986	STEP 7B OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
1449	MOUNTING SHALL BE IN ACCORDANCE WITH 1449.
4983	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.
4984	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.
2280	OVERLOAD. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2280.
2282	OVERLOAD. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2284	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2284 OHM(S).
2286	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2286 MILLIOHMS.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OVERLOAD (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM VOLTAGE DROP ACROSS CLOSED CONTACTS (SELECT ONE)	
(VOLTS)	2288
(MILLIVOLTS)	2290
PERCENT OF APPLIED LOAD VOLTAGE (PERCENT)	2292
MINIMUM VOLTAGE ACROSS OPEN CONTACTS	
(PERCENT OF APPLIED LOAD VOLTAGE)	2294
REMAIN MECHANICALLY AND ELECTRICALLY OPERATIVE.	2296
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2300
PER DOCUMENT (DOC DES)	2302
NUMBER OF OPERATIONS (QUANTITY)	2304

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
2288	THE VOLTAGE DROP ACROSS CLOSED CONTACTS SHALL BE NOT GREATER THAN 2288 VOLT(S).
2290	THE VOLTAGE DROP ACROSS CLOSED CONTACTS SHALL BE NOT GREATER THAN 2290 MILLIVOLTS.
2292	THE VOLTAGE DROP ACROSS CLOSED CONTACTS SHALL BE NOT GREATER THAN 2292 PERCENT OF THE APPLIED LOAD VOLTAGE.
2294	THE VOLTAGE ACROSS THE OPEN CONTACTS SHALL BE NOT LESS THAN 2294 PERCENT OF THE APPLIED LOAD VOLTAGE.
2296	THE ITEM(S) SHALL REMAIN MECHANICALLY AND ELECTRICALLY OPERATIVE.
2300	OVERLOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2300.
2302	OVERLOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2302.
2304	THERE SHALL BE 2304 OPERATIONS.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OVERLOAD (CONT)	
PER DOCUMENT (CONT)	
OVERLOAD CURRENT (SELECT ONE)	
(AMPERES)	2306
(PERCENT OF RATED LOAD)	2308
CYCLING RATE (CYCLES PER MINUTE)	2310
PLUS CYCLING RATE TOLERANCE (CYCLES PER MINUTE)	2312
MINUS CYCLING RATE TOLERANCE (CYCLES PER MINUTE)	2314
DUTY CYCLE	
ON (PERCENT)	2316
OFF (PERCENT)	2318
RESISTANCE TO SOLDERING HEAT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4700
NO EVIDENCE OF PHYSICAL DAMAGE.	4701
REMAIN WITHIN SPECIFIED TOLERANCE.	4718

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2306	THE OVERLOAD CURRENT SHALL BE 2306 AMPERE(S).
2308	THE OVERLOAD CURRENT SHALL BE 2308 PERCENT OF THE RATED LOAD.
2310	THE CYCLING RATE SHALL BE 2310 CYCLES PER MINUTE.
2312	THE PLUS CYCLING RATE TOLERANCE SHALL BE 2312 CYCLES PER MINUTE.
2314	THE MINUS CYCLING RATE TOLERANCE SHALL BE 2314 CYCLES PER MINUTE.
	THE DUTY CYCLE SHALL BE AS FOLLOWS:
2316	'ON' 2316 PERCENT OF CYCLE.
2318	'OFF' 2318 PERCENT OF CYCLE.
4700	RESISTANCE TO SOLDERING HEAT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4700.
4701	RESISTANCE TO SOLDERING HEAT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4718	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO SOLDERING HEAT (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4689
PER MIL-STD-202, METHOD 210.	4698
*TEST CONDITION (LETTER)	4691
NUMBER OF TERMINATIONS TESTED (QUANTITY)	4694
DEPTH OF IMMERSION IN SOLDER (SELECT ONE)	
(INCHES)	4692
(MILLIMETERS)	4669
IMMERSION IN FLUX PERMITTED.	4671
SPECIAL PREPARATIONS PERMITTED.	4989
COOLING TIME (MINUTES)	4695
RESISTANCE TO SOLVENTS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4834
NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.	4830
MARKING SHALL REMAIN LEGIBLE.	4836

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4689	RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4689.
4698	RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 210 OF MIL-STD-202.
4691	TEST CONDITION LETTER 4691 SHALL APPLY.
4694	4694 TERMINATION(S) PER UNIT SHALL BE TESTED.
4692	DEPTH OF IMMERSION IN SOLDER SHALL BE 4692 INCH(S).
4669	DEPTH OF IMMERSION IN SOLDER SHALL BE 4669 MILLIMETER(S).
4671	IMMERSION OF TERMINATIONS IN FLUX SHALL BE PERMITTED.
4989	SPECIAL PREPARATION SHALL BE PERMITTED.
4695	COOLING TIME SHALL BE 4695 MINUTES PRIOR TO FINAL EXAMINATION AND MEASUREMENTS.
4834	RESISTANCE TO SOLVENTS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4834.
4830	RESISTANCE TO SOLVENTS. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
4836	MARKING SHALL REMAIN LEGIBLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO SOLVENTS (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4829
PER MIL-STD-202, METHOD 215.	4839
SOLVENTS TO BE ADDED (NAME)	4838
SOLVENTS TO BE DELETED (SUBPARAGRAPH LETTER)	4835
BRUSH (SELECT ONE)	
MARKING AREA.	4831
ALL OF SPECIMEN TO BE BRUSHED.	6279
ROTATIONAL TORQUE/OPERATING FORCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2320
AS FOLLOWS:	2322

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4829	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4829.
4839	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 215 OF MIL-STD-202. THE SPECIMENS SHALL BE DIVIDED INTO GROUPS OF EQUAL NUMBER TO THE EXTENT POSSIBLE.
4838	IN ADDITION TO THE SPECIFIED SOLVENT(S), 4838 SHALL ALSO BE USED.
4835	BRUSHING SHALL BE PERFORMED WITH THE SOLVENT(S) IN ACCORDANCE WITH METHOD 215 OF MIL-STD-202, EXCEPT THAT SOLUTION(S) 4835 SHALL NOT BE USED.
4831	THE MARKING AREA SHALL BE BRUSHED.
6279	THE ENTIRE SURFACE SHALL BE BRUSHED.
2320	ROTATIONAL TORQUE/OPERATING FORCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2320.
2322	ROTATIONAL TORQUE/OPERATING FORCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ROTATIONAL TORQUE/OPERATING FORCE (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM TORQUE (SELECT ONE)	
(POUND-INCHES)	2324
(NEWTON METERS)	2326
OPERATING FORCE	
MINIMUM (SELECT ONE)	
(NEWTONS)	2328
(OUNCES)	2332
(POUNDS)	2334
MAXIMUM (SELECT ONE)	
(NEWTONS)	2336
(POUNDS)	2342
(OUNCES)	2340
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2344

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2324	ROTATIONAL TORQUE SHALL BE NOT GREATER THAN 2324 POUND-INCHES.
2326	ROTATIONAL TORQUE SHALL BE NOT GREATER THAN 2326 NEWTON METER(S).
2328	OPERATING FORCE SHALL BE NOT LESS THAN 2328 NEWTON(S).
2332	OPERATING FORCE SHALL BE NOT LESS THAN 2332 OUNCE(S).
2334	OPERATING FORCE SHALL BE NOT LESS THAN 2334 POUND(S).
2336	OPERATING FORCE SHALL BE NOT GREATER THAN 2336 NEWTON(S).
2342	OPERATING FORCE SHALL BE NOT GREATER THAN 2342 POUND(S).
2340	OPERATING FORCE SHALL BE NOT GREATER THAN 2340 OUNCE(S).
2344	ROTATIONAL TORQUE/OPERATING FORCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2344.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ROTATIONAL TORQUE/OPERATING FORCE (CONT)	
TEST METHODS (CONT)	
PER DOCUMENT (DOC DES)	2346
LOW TEMPERATURE TEST TEMPERATURE (DEGREES CELSIUS)	2348
LOW TEMPERATURE TEST DURATION (HOURS)	2350
ROOM TEMPERATURE TEST TEMPERATURE (DEGREES CELSIUS)	2352
SALT SPRAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4878
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE.	4782
MAXIMUM CONTACT RESISTANCE (MILLIOHMS)	2354
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2356

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2346	ROTATIONAL TORQUE/OPERATING FORCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2346.
2348	THE LOW TEMPERATURE TEST TEMPERATURE SHALL BE 2348 DEGREES CELSIUS.
2350	THE LOW TEMPERATURE TEST DURATION SHALL BE 2350 HOUR(S).
2352	THE ROOM TEMPERATURE TEST TEMPERATURE SHALL BE 2352 DEGREES CELSIUS.
4878	SALT SPRAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4878.
4782	SALT SPRAY. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
2354	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2354 MILLIOHM(S).
2356	THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 2356 MEGOHM(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT SPRAY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4770
PER MIL-STD-202, METHOD 101.	4771
*TEST CONDITION (LETTER)	4772
MOUNTING (SELECT ONE)	
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4773
MOUNTING SHALL BE BY NORMAL METHOD.	4765
MOUNTING SHALL BE BY ANY SUITABLE METHOD.	4766
SAND AND DUST	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4958
NO EVIDENCE OF DUST PENETRATION.	4959
NO EVIDENCE OF MECHANICAL OR ELECTRICAL DAMAGE.	2358

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4770	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4770.
4771	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 101 OF MIL-STD-202.
4772	TEST CONDITION LETTER 4772 SHALL APPLY.
4773	MOUNTING SHALL BE IN ACCORDANCE WITH 4773.
4765	MOUNTING SHALL BE BY THE NORMAL METHOD.
4766	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4958	SAND AND DUST. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4958.
4959	SAND AND DUST. THERE SHALL BE NO EVIDENCE OF DUST PENETRATION.
2358	THERE SHALL BE NO EVIDENCE OF MECHANICAL OR ELECTRICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SAND AND DUST (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4952
PER MIL-STD-202, METHOD 110.	4960
TEST SPECIMENS SHALL BE OPERATED DURING TEST STEPS (NUMBER)	4872
*DURATION OF OPERATION (HOURS)	6299
SPECIMEN ORIENTATION SHALL BE CHANGED DURING TEST.	1539
SECOND 6-HOUR TEST REQUIRED IMMEDIATELY FOLLOWING TEMPERATURE STABILIZATION IN STEP 2.	4956
SEAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4745
AS FOLLOWS:	6370
SPECIFIED TEST METHOD SENSITIVITY.	4746
NO BUBBLES INDICATIVE OF LEAKAGE.	4748
MAXIMUM LEAKAGE CURRENT (MILLIAMPERES)	2360

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4952	SAND AND DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4952.
4960	SAND AND DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 110 OF MIL-STD-202.
4872	ITEM(S) SHALL BE OPERATED DURING STEP(S) 4872.
6299	DURATION OF OPERATION SHALL BE 6299 HOUR(S).
1539	ORIENTATION SHALL BE CHANGED DURING THE TEST.
4956	THE SECOND 6-HOUR TEST SHALL BE PERFORMED IMMEDIATELY AFTER REACHING TEMPERATURE STABILIZATION IN STEP 2.
4745	SEAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4745.
6370	SEAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
4746	THE REQUIREMENTS SHALL BE IN ACCORDANCE WITH THE SPECIFIED TEST METHOD SENSITIVITY.
4748	THERE SHALL BE NO BUBBLES INDICATIVE OF LEAKAGE.
2360	LEAKAGE CURRENT SHALL BE NOT GREATER THAN 2360 MILLIAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____.	4734
PER MIL-STD-202, METHOD 112.	4732
*TEST CONDITION LETTER	
LETTER A.	4737
LIQUID FOR BATH (NAME)	4738
MINIMUM BATH TEMPERATURE (DEGREES CELSIUS)	4739
LETTER B.	6320
LIQUID FOR BATH (NAME)	6321
MINIMUM BATH TEMPERATURE (DEGREES CELSIUS)	6322
LETTER C.	6323
*LEAK RATE SENSITIVITY (ATM CC/SEC)	4741

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4734	SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4734.
4732	SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 112 OF MIL-STD-202.
4737	TEST CONDITION LETTER A SHALL APPLY.
4738	LIQUID FOR BUBBLE BATH SHALL BE 4738.
4739	TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 4739 DEGREES CELSIUS.
6320	TEST CONDITION LETTER B SHALL APPLY.
6321	LIQUID FOR BUBBLE TEST BATH SHALL BE 6321.
6322	TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 6322 DEGREES CELSIUS.
6323	TEST CONDITION LETTER C SHALL APPLY.
4741	LEAK SENSITIVITY RATE SHALL BE 4741 ATM CC/SEC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
LETTER C. (CONT)	
*TEST PROCEDURE (SELECT ONE)	
TEST PROCEDURE I.	4740
VACUUM PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	4742
(KILOPASCALS)	4736
TEST PROCEDURE II.	6324
BACKFILL PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	6325
(KILOPASCALS)	6326
NUMBER OF PRESSURE CYCLES (QUANTITY)	4749
TEST PROCEDURE III.	6328
GROSS LEAK TEST CONDITION (LETTER)	4750

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4740	PROCEDURE NUMBER I SHALL APPLY.
4742	VACUUM PRESSURE SHALL BE 4742 POUNDS PER SQUARE INCH.
4736	VACUUM PRESSURE SHALL BE 4736 KILOPASCALS.
6324	PROCEDURE NUMBER II SHALL APPLY.
6325	BACKFILL PRESSURE SHALL BE 6325 POUNDS PER SQUARE INCH.
6326	BACKFILL PRESSURE SHALL BE 6326 KILOPASCALS.
4749	THERE SHALL BE 4749 PRESSURE CYCLE(S).
6328	PROCEDURE NUMBER III SHALL APPLY.
4750	GROSS LEAK TEST CONDITION LETTER 4750 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
LETTER C. (CONT)	
TEST PROCEDURE IV.	6329
CHAMBER PRESSURE (SELECT ONE)	
(TORR)	4751
(KILOPASCALS)	4735
DURATION OF REDUCED PRESSURE (MINUTES)	4752
GROSS LEAK TEST CONDITION (LETTER)	6330
LETTER D.	6331
ANY SUITABLE MOUNTING FIXTURE.	4743
LETTER E.	6332
ANY SUITABLE MOUNTING FIXTURE.	6333
PER MIL-S-22710.	2362
METHOD (MOUNTING) (SELECT ONE)	
I.	2364
II.	2366

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6329	PROCEDURE NUMBER IV SHALL APPLY.
4751	CHAMBER PRESSURE SHALL BE 4751 TORR.
4735	CHAMBER PRESSURE SHALL BE 4735 KILOPASCALS.
4752	DURATION AT LOW PRESSURE SHALL BE 4752 MINUTE(S).
6330	GROSS LEAK TEST CONDITION LETTER 6330 SHALL APPLY.
6331	TEST CONDITION LETTER D SHALL APPLY.
4743	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
6332	TEST CONDITION LETTER E SHALL APPLY.
6333	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
2362	SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-22710.
2364	METHOD I SHALL APPLY.
2366	METHOD II SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, HIGH IMPACT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1494
NO EVIDENCE OF PHYSICAL DAMAGE.	1495
REMAIN WITHIN SPECIFIED TOLERANCE.	1464
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY DURING TEST.	1451
MAXIMUM DISCONTINUITY (SELECT ONE)	
(MICROSECONDS)	2368
(MILLISECONDS)	2370
NO LAMP IN TEST CIRCUIT SHALL LIGHT.	1550
NO CHANGE IN SHAFT POSITION.	2372
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1486
PER MIL-STD-202, METHOD 207.	1482

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1494	SHOCK, HIGH IMPACT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1494.
1495	SHOCK, HIGH IMPACT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1464	ITEM(S) SHALL REMAIN SPECIFIED TOLERANCE.
1451	THERE SHALL BE NO DISCONTINUITY DURING THE TEST.
2368	DISCONTINUITY SHALL BE NOT GREATER THAN 2368 MICROSECOND(S).
2370	DISCONTINUITY SHALL BE NOT GREATER THAN 2370 MILLISECOND(S).
1550	NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.
2372	THERE SHALL BE NO CHANGE IN THE SHAFT POSITION.
1486	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1486.
1482	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 207 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, HIGH IMPACT (CONT)	
PER MIL-STD-202, METHOD 207. (CONT)	
*MOUNTING FIXTURE (SELECT ONE)	
FIGURE NUMBER FROM METHOD 207 OF MIL-STD-202 (NUMBER)	1488
ANY SUITABLE MOUNTING FIXTURE.	1478
MOUNTING FIXTURE PER DOCUMENT (DOC DES)	1468
MONITOR CONTACT CHATTER PER METHOD 310 OF MIL-STD-202.	
*TEST CIRCUIT (LETTER)	1487
*TEST CONDITION (LETTER)	1479
PERCENT RATED LOAD APPLIED (PERCENT)	6203
PER MIL-S-901.	4132
EQUIPMENT GRADE (LETTER)	4133

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1488	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH FIGURE 1488 OF METHOD 207 OF MIL-STD-202.
1478	THE MOUNTING FIXTURE SHALL BE ANY SUITABLE MOUNTING FIXTURE.
1468	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH 1468.
1487	MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1487 SHALL APPLY.
1479	TEST CONDITION LETTER 1479 OF METHOD 310 OF MIL-STD-202 SHALL APPLY.
6203	THE ELECTRICAL LOAD SHALL BE 6203 PERCENT OF THE RATED LOAD.
4132	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-901.
4133	THE EQUIPMENT GRADE SHALL BE 4133.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, HIGH IMPACT (CONT)	
PER MIL-S-901. (CONT)	
EQUIPMENT CLASSIFICATION (SELECT ONE)	
DECK MOUNTED.	4135
SHELL MOUNTED.	4136
HULL MOUNTED.	4134
SUBSIDIARY COMPONENT.	4138
SUBASSEMBLIES.	4139
PRINCIPAL UNIT.	4137
TEST CLASSIFICATION (SELECT ONE)	
LIGHTWEIGHT.	4143
MEDIUMWEIGHT.	4144
HEAVYWEIGHT.	4145
TEST TYPE (LETTER)	4146
METHOD OF MOUNTING (FIXTURE)	4147
EQUIPMENT CLASS (NUMERAL)	4142

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4135	THE EQUIPMENT CLASSIFICATION SHALL BE DECK MOUNTED.
4136	THE EQUIPMENT CLASSIFICATION SHALL BE SHELL MOUNTED.
4134	THE EQUIPMENT CLASSIFICATION SHALL BE HULL MOUNTED.
4138	THE EQUIPMENT CLASSIFICATION SHALL BE SUBSIDIARY COMPONENT.
4139	THE EQUIPMENT CLASSIFICATION SHALL BE SUBASSEMBLIES.
4137	THE EQUIPMENT CLASSIFICATION SHALL BE PRINCIPAL UNIT.
4143	THE TEST CLASSIFICATION SHALL BE LIGHTWEIGHT.
4144	THE TEST CLASSIFICATION SHALL BE MEDIUMWEIGHT.
4145	THE TEST CLASSIFICATION SHALL BE HEAVYWEIGHT.
4146	THE TEST TYPE SHALL BE 4146.
4147	THE METHOD OF MOUNTING SHALL BE IN ACCORDANCE WITH FIXTURE 4147.
4142	THE EQUIPMENT CLASS SHALL BE 4142.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, SPECIFIED PULSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1508
NO EVIDENCE OF PHYSICAL DAMAGE.	1509
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY DURING TEST.	1471
MAXIMUM DISCONTINUITY (SELECT ONE)	
(MICROSECONDS)	2374
(MILLISECONDS)	2376
NO LAMP IN TEST CIRCUIT SHALL LIGHT.	1551
REMAIN WITHIN SPECIFIED TOLERANCE.	4703
MAXIMUM CONTACT RESISTANCE (MILLIOHMS)	2378
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2380
NO CHANGE IN SHAFT POSITION.	2382
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1502

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1508	SHOCK, SPECIFIED PULSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1508.
1509	SHOCK, SPECIFIED PULSE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1471	THERE SHALL BE NO DISCONTINUITY DURING THE TEST.
2374	DISCONTINUITY SHALL BE NOT GREATER THAN 2374 MICROSECOND(S).
2376	DISCONTINUITY SHALL BE NOT GREATER THAN 2376 MILLISECOND(S).
1551	NO LAMP IN TEST CIRCUIT SHALL LIGHT.
4703	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
2378	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2378 MILLIOHM(S).
2380	THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 2380 MEGOHM(S).
2382	THERE SHALL BE NO CHANGE IN THE SHAFT POSITION.
1502	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1502.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, SPECIFIED PULSE (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 213.	1500
*TEST CONDITION (LETTER)	1504
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	4686
NORMAL MOUNTING METHOD.	4685
MOUNT PER DOCUMENT (DOC DES)	4684
MONITOR CONTACT CHATTER PER METHOD 310 OF MIL-STD-202.	
*TEST CIRCUIT (LETTER)	1503
*TEST CONDITION (LETTER)	1499
PERCENT RATED LOAD APPLIED (PERCENT)	6204
SHORT CIRCUIT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2384
AS FOLLOWS:	2386

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1500	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 213 OF MIL-STD-202.
1504	TEST CONDITION LETTER 1504 SHALL APPLY.
4686	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4685	MOUNTING SHALL BE BY THE NORMAL METHOD.
4684	MOUNTING SHALL BE IN ACCORDANCE WITH 4684.
1503	MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT 1503 SHALL APPLY.
1499	TEST CONDITION LETTER 1499 OF METHOD 310 OF MIL-STD-202 SHALL APPLY.
6204	THE ELECTRICAL LOAD SHALL BE 6204 PERCENT OF THE RATED LOAD.
2384	SHORT CIRCUIT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2384.
2386	SHORT CIRCUIT. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHORT CIRCUIT (CONT)	
AS FOLLOWS: (CONT)	
THERE SHALL BE NO WELDING OR STICKING OF CONTACTS.	2388
REMAIN MECHANICALLY AND ELECTRICALLY OPERATIVE AFTER TEST.	2390
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2391
PER DOCUMENT (DOC DES)	2392
MAXIMUM APPLIED TEST CURRENT (AMPERES)	2393
OPEN CIRCUIT TEST VOLTAGE (VOLTS)	2394
FREQUENCY (HERTZ)	2395
LOAD (TYPE)	2396
TEST CYCLES (QUANTITY)	2397
SOLDERABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4674

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2388	THERE SHALL BE NO WELDING OR STICKING OF CONTACTS.
2390	THE SWITCH SHALL BE MECHANICALLY AND ELECTRICALLY OPERATIVE AFTER TESTING.
2391	SHORT CIRCUIT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2391.
2392	SHORT CIRCUIT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2392.
2393	THE APPLIED TEST CURRENT SHALL BE NOT GREATER THAN 2393 AMPERES.
2394	THE OPEN CIRCUIT TEST VOLTAGE SHALL BE 2394 VOLTS.
2395	THE FREQUENCY SHALL BE 2395 HERTZ.
2396	THE LOAD TYPE SHALL BE 2396.
2397	THE NUMBER OF TEST CYCLES SHALL BE 2397.
4674	SOLDERABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4674.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SOLDERABILITY (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE.	4675
MEET EVALUATION CRITERIA SPECIFIED IN METHOD 208 OF MIL-STD-202.	4672
REMAIN WITHIN SPECIFIED TOLERANCE.	4677
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4662
PER MIL-STD-202, METHOD 208.	4683
NUMBER OF TERMINALS TO BE TESTED (QUANTITY)	4666
DEPTH OF IMMERSION (SELECT ONE)	
(INCHES)	4667
(MILLIMETERS)	4663
DISTANCE WRAP WIRE APPLIED FROM BODY (SELECT ONE)	
(INCHES)	4664
(MILLIMETERS)	4665
SPECIAL PREPARATIONS PERMITTED.	6205

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4675	SOLDERABILITY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4672	THE RESULTS OF THE SOLDERABILITY TEST SHALL BE IN ACCORDANCE WITH THE ACCEPTANCE CRITERIA OF METHOD 208 OF MIL-STD-202.
4677	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4662	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4662.
4683	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 208 OF MIL-STD-202.
4666	4666 TERMINATION(S) PER UNIT SHALL BE TESTED.
4667	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4667 INCH(S).
4663	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4663 MILLIMETER(S).
4664	THE WRAP WIRE SHALL BE 4664 INCH(S) FROM THE BODY.
4665	THE WRAP WIRE SHALL BE 4665 MILLIMETER(S) FROM THE BODY.
6205	SPECIAL PREPARATION SHALL BE PERMITTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STOPS STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2400
AS FOLLOWS:	2402
NO EVIDENCE OF PHYSICAL DAMAGE.	2404
NO SLIPPAGE OF MOVING PARTS.	2406
NO EVIDENCE OF MALFUNCTION.	2408
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2410
PER DOCUMENT (DOC DES)	2412
TEST TORQUE (SELECT ONE)	
(POUND-INCHES)	2414
(NEWTON METERS)	2416
DURATION OF TEST TORQUE (SELECT ONE)	
(SECONDS)	2418
(MINUTES)	2420
TEST FORCE (SELECT ONE)	
(POUNDS)	2422
(NEWTONS)	2424

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2400	STOPS STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2400.
2402	STOPS STRENGTH. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2404	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2406	THERE SHALL BE NO SLIPPAGE OF MOVING PARTS.
2408	THERE SHALL BE NO EVIDENCE OF MALFUNCTION.
2410	STOPS STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2410.
2412	STOPS STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2412.
2414	THE TEST TORQUE SHALL BE 2414 POUND-INCH(S).
2416	THE TEST TORQUE SHALL BE 2416 NEWTON METER(S).
2418	THE DURATION OF THE TEST TORQUE SHALL BE 2418 SECOND(S).
2420	THE DURATION OF THE TEST TORQUE SHALL BE 2420 MINUTE(S).
2422	THE TEST FORCE SHALL BE 2422 POUND(S).
2424	THE TEST FORCE SHALL BE 2424 NEWTON(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STRENGTH OF MOUNTING MEANS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2426
AS FOLLOWS:	2428
NO EVIDENCE OF DAMAGE.	2430
NO LOOSENING AND TWISTING OF BUSHING RELATIVE TO SWITCH FRONT PLATE ASSEMBLY.	2432
DAMAGE TO NONTURN DEVICE NOT CONSIDERED A FAILURE.	2434
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2436
PER DOCUMENT (DOC DES)	2438
TEST TORQUE (SELECT ONE)	
(POUND-INCHES)	2440
(NEWTON METERS)	2442

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2426	STRENGTH OF MOUNTING MEANS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2426.
2428	STRENGTH OF MOUNTING MEANS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2430	THERE SHALL BE NO EVIDENCE OF DAMAGE.
2432	THERE SHALL BE NO LOOSENING AND TWISTING OF THE BUSHING RELATIVE TO THE SWITCH FRONT PLATE ASSEMBLY.
2434	DAMAGE TO THE NONTURN DEVICE SHALL NOT BE CONSIDERED A FAILURE.
2436	STRENGTH OF MOUNTING MEANS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2436.
2438	STRENGTH OF MOUNTING MEANS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2438.
2440	THE TEST TORQUE SHALL BE 2440 POUND-INCH(S).
2442	THE TEST TORQUE SHALL BE 2442 NEWTON METER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, HIGH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6228
NO EVIDENCE OF PHYSICAL DAMAGE.	6229
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6217
PER DOCUMENT (DOC DES)	3700
PROCEDURE (ROMAN NUMERAL)	6219
STORAGE TEMPERATURE (DEGREES CELSIUS)	6220
STORAGE DURATION (HOURS)	6221
HIGHEST OPERATING TEMPERATURE (DEGREES CELSIUS)	6222
OPERATION TIME (SELECT ONE)	
(MINUTES)	6224
(HOURS)	6225
TEMPERATURE, LOW	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6318

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6228	TEMPERATURE, HIGH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6228.
6229	TEMPERATURE, HIGH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6217	TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6217.
3700	TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3700.
6219	PROCEDURE NUMBER 6219 SHALL APPLY.
6220	STORAGE TEMPERATURE SHALL BE 6220 DEGREES CELSIUS.
6221	STORAGE DURATION SHALL BE 6221 HOUR(S).
6222	HIGHEST OPERATING TEMPERATURE SHALL BE 6222 DEGREES CELSIUS.
6224	OPERATING TIME SHALL BE 6224 MINUTE(S).
6225	OPERATING TIME SHALL BE 6225 HOUR(S).
6318	TEMPERATURE, LOW. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6318.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, LOW (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE.	6319
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6231
PER DOCUMENT (DOC DES)	3702
STORAGE TEMPERATURE (DEGREES CELSIUS)	6234
STORAGE DURATION (HOURS)	6235
LOWEST OPERATING TEMPERATURE (DEGREES CELSIUS)	6236
CHAMBER AIR VELOCITY (SELECT ONE)	
(FEET PER SECOND)	6237
(METERS PER SECOND)	6238
OPERATION TIME (SELECT ONE)	
(MINUTES)	6315
(HOURS)	6316
TEMPERATURE RISE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2444

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6319	TEMPERATURE, LOW. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6231	TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6231.
3702	TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3702.
6234	STORAGE TEMPERATURE SHALL BE 6234 DEGREES CELSIUS.
6235	STORAGE DURATION SHALL BE 6235 HOUR(S).
6236	LOWEST OPERATING TEMPERATURE SHALL BE 6236 DEGREES CELSIUS.
6237	CHAMBER AIR VELOCITY SHALL BE 6237 FEET PER SECOND.
6238	CHAMBER AIR VELOCITY SHALL BE 6238 METERS PER SECOND.
6315	OPERATING TIME SHALL BE 6315 MINUTE(S).
6316	OPERATING TIME SHALL BE 6316 HOUR(S).
2444	TEMPERATURE RISE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2444.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE RISE (CONT)	
REQUIREMENTS (CONT)	
MAXIMUM TEMPERATURE RISE (DEGREES CELSIUS)	2446
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2450
PER DOCUMENT (DOC DES)	2452
TEST CURRENT (SELECT ONE)	
(PERCENT OF RATED CURRENT)	2454
(AMPERES)	2456
TEST CURRENT APPLICATION DURATION (SELECT ONE)	
(MINUTES)	2458
(HOURS)	2460
TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	2462
(VOLTS, AC)	2464
NUMBER OF READINGS (QUANTITY)	2466
READING INTERVAL (MINUTES)	2468

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2446	TEMPERATURE RISE. THE TEMPERATURE RISE SHALL BE NOT GREATER THAN 2446 DEGREES CELSIUS.
2450	TEMPERATURE RISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2450.
2452	TEMPERATURE RISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2452.
2454	THE TEST CURRENT SHALL BE 2454 PERCENT OF THE RATED CURRENT.
2456	THE TEST CURRENT SHALL BE 2456 AMPERE(S).
2458	THE TEST CURRENT APPLICATION DURATION SHALL BE 2458 MINUTES.
2460	THE TEST CURRENT APPLICATION DURATION SHALL BE 2460 HOUR(S).
2462	THE TEST VOLTAGE SHALL BE 2462 VOLTS, DC.
2464	THE TEST VOLTAGE SHALL BE 2464 VOLTS, AC.
2466	THERE SHALL BE 2466 READINGS.
2468	THE READING INTERVAL SHALL BE 2468 MINUTE(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINAL STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1418
NO EVIDENCE OF PHYSICAL DAMAGE.	1433
REMAIN WITHIN SPECIFIED TOLERANCE.	6296
MAXIMUM CONTACT RESISTANCE (MILLIOHMS)	2470
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2472
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1410
PER MIL-STD-202, METHOD 211.	1375
*TEST CONDITIONS	
TEST CONDITION A, APPLIED FORCE (SELECT ONE)	
(POUNDS)	1411
(NEWTONS)	1419
TEST CONDITION B, BENDS (NUMBER)	1412

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1418	TERMINAL STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1418.
1433	TERMINAL STRENGTH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6296	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
2470	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2470 MILLIOHM(S).
2472	THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 2472 MEGOHM(S).
1410	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1410.
1375	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 211 OF MIL-STD-202.
1411	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1411 POUND(S).
1419	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1419 NEWTON(S).
1412	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION B. THERE SHALL BE 1412 BEND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINAL STRENGTH (CONT)	
TEST CONDITIONS (CONT)	
TEST CONDITION C, LOAD (SELECT ONE)	
(POUNDS)	1413
(KILOGRAMS)	1420
TEST CONDITION D.	1414
TEST CONDITION E, TORQUE (SELECT ONE)	
(POUND-INCHES)	1416
(NEWTON METERS)	1421
THERMAL EMF	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2474
MAXIMUM THERMAL EMF (MICROVOLTS PER DEGREE CELSIUS)	2475
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2478
PER DOCUMENT (DOC DES)	2480
TEST TEMPERATURE (DEGREES CELSIUS)	2482

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1413	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1413 POUND(S).
1420	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1420 KILOGRAM(S).
1414	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION D.
1416	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1416 POUND-INCH(S).
1421	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1421 NEWTON METERS.
2474	THERMAL EMF. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2474.
2475	THERMAL EMF. THE THERMAL EMF SHALL BE NOT GREATER THAN 2475 MICROVOLTS PER DEGREE CELSIUS.
2478	THERMAL EMF. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2478.
2480	THERMAL EMF. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2480.
2482	THE TEST TEMPERATURE SHALL BE 2482 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THERMAL SHOCK (TEMPERATURE CYCLING)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4722
NO EVIDENCE OF PHYSICAL DAMAGE.	4723
REMAIN WITHIN SPECIFIED TOLERANCE.	4726
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	2484
(MILLIOHMS)	2486
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2490
NO ELECTRICAL DAMAGE.	2492
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4713
PER MIL-STD-202, METHOD 107.	4714
*TEST CONDITION (LETTER)	4715
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4719

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4722	THERMAL SHOCK (TEMPERATURE CYCLING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4722.
4723	THERMAL SHOCK (TEMPERATURE CYCLING). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4726	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
2484	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2484 OHM(S).
2486	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2486 MILLIOHM(S).
2490	THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 2490 MEGOHM(S).
2492	THERE SHALL BE NO ELECTRICAL DAMAGE.
4713	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4713.
4714	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 107 OF MIL-STD-202.
4715	TEST CONDITION LETTER 4715 SHALL APPLY.
4719	MOUNTING SHALL BE IN ACCORDANCE WITH 4719.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, HIGH FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1455
NO EVIDENCE OF PHYSICAL DAMAGE.	1456
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY DURING TEST.	1473
MAXIMUM DISCONTINUITY (SELECT ONE)	
(MICROSECONDS)	2493
(MILLISECONDS)	2494
NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.	1552
REMAIN WITHIN SPECIFIED TOLERANCE.	1469
MAXIMUM CONTACT RESISTANCE (MILLIOHMS)	2495
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2496
NO CHANGE IN SHAFT POSITION.	2497
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1446

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1455	VIBRATION, HIGH FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1455.
1456	VIBRATION, HIGH FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1473	THERE SHALL BE NO DISCONTINUITY DURING TEST.
2493	DISCONTINUITY SHALL BE NOT GREATER THAN 2493 MICROSECOND(S).
2494	DISCONTINUITY SHALL BE NOT GREATER THAN 2494 MILLISECOND(S).
1552	NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.
1469	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
2495	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2495 MILLIOHM(S).
2496	THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 2496 MEGOHM(S).
2497	THERE SHALL BE NO CHANGE IN THE SHAFT POSITION.
1446	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1446.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, HIGH FREQUENCY (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 204.	1447
*TEST CONDITION (LETTER)	1448
PERCENT RATED LOAD APPLIED (PERCENT)	6200
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4709
NORMAL MOUNTING METHOD.	4708
MOUNT PER DOCUMENT (DOC DES)	4707
METHOD OF DETERMINING MECHANICAL RESONANCE (SELECT ONE)	
VISUALLY BY MEANS OF A STROBOTAC.	1533
ELECTRICAL OUTPUT INDICATORS.	1534
MONITOR CONTACT CHATTER IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202.	
*TEST CIRCUIT (LETTER)	1442
*TEST CONDITION (LETTER)	1444

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1447	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 204 OF MIL-STD-202.
1448	TEST CONDITION LETTER 1448 SHALL APPLY.
6200	THE LOAD SHALL BE 6200 PERCENT OF THE RATED LOAD.
4709	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4708	MOUNTING SHALL BE BY THE NORMAL METHOD.
4707	MOUNTING SHALL BE IN ACCORDANCE WITH 4707.
1533	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE VISUALLY BY MEANS OF A STROBOTAC.
1534	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE BY ELECTRICAL OUTPUT INDICATORS.
1442	MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1442 SHALL APPLY.
1444	TEST CONDITION LETTER 1444 OF METHOD 310 OF MIL-STD-202 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1475
NO EVIDENCE OF PHYSICAL DAMAGE.	1476
REMAIN WITHIN SPECIFIED TOLERANCE.	1480
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY DURING TEST.	1490
MAXIMUM DISCONTINUITY (SELECT ONE)	
(MICROSECONDS)	2900
(MILLISECONDS)	2902
NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.	1553
NO CHANGE IN SHAFT POSITION.	2904
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1466
PER MIL-STD-202, METHOD 210.	1467
DURATION OF VIBRATION PER AXIS (HOURS)	1470

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1475	VIBRATION, LOW FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1475.
1476	VIBRATION, LOW FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1480	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1490	THERE SHALL BE NO DISCONTINUITY DURING TEST.
2900	DISCONTINUITY SHALL BE NOT GREATER THAN 2900 MICROSECOND(S).
2902	DISCONTINUITY SHALL BE NOT GREATER THAN 2902 MILLISECOND(S).
1553	NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.
2904	THERE SHALL BE NO CHANGE IN THE SHAFT POSITION.
1466	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1466.
1467	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 210 OF MIL-STD-202.
1470	DURATION OF TEST SHALL BE 1470 HOUR(S) PER AXIS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY (CONT)	
PER MIL-STD-202, METHOD 210. (CONT)	
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4731
NORMAL MOUNTING METHOD.	4730
MOUNT PER DOCUMENT (DOC DES)	4729
DIRECTION OF MOTION (SELECT ONE)	
PARALLEL TO LONGITUDINAL AXIS.	1535
PERPENDICULAR TO LONGITUDINAL AXIS.	1536
ON THE CENTERLINE OF MOST SENSITIVE AXIS.	4979
90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.	4978
THREE MUTUALLY PERPENDICULAR DIRECTIONS.	1537
MONITOR CONTACT CHATTER IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202.	
*TEST CIRCUIT (LETTER)	1491

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4731	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4730	MOUNTING SHALL BE BY THE NORMAL METHOD.
4729	MOUNTING SHALL BE IN ACCORDANCE WITH 4729.
1535	THE DIRECTION OF MOTION SHALL BE PARALLEL TO THE LONGITUDINAL AXIS.
1536	THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE LONGITUDINAL AXIS.
4979	THE DIRECTION OF MOTION SHALL BE ON THE CENTERLINE OF THE MOST SENSITIVE AXIS.
4978	THE DIRECTION OF MOTION SHALL BE 90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.
1537	THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUALLY PERPENDICULAR DIRECTIONS.
1491	MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1491 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY (CONT)	
MONITOR CONTACT CHATTER IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. (CONT)	
*TEST CONDITION (LETTER)	1492
PERCENT RATED LOAD APPLIED (PERCENT)	6201
VIBRATION, RANDOM	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1435
NO EVIDENCE OF PHYSICAL DAMAGE.	1436
REMAIN WITHIN SPECIFIED TOLERANCE.	1538
DISCONTINUITY DURING TEST (SELECT ONE)	
NO DISCONTINUITY.	1374
MAXIMUM (MILLISECONDS)	1545
MAXIMUM (MICROSECONDS)	1546
NO LAMP IN TEST CIRCUIT SHALL LIGHT.	1457
NO CHANGE IN SHAFT POSITION.	2906

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1492	TEST CONDITION LETTER 1492 OF METHOD 310 OF MIL-STD-202 SHALL APPLY.
6201	THE LOAD SHALL BE 6201 PERCENT OF THE RATED LOAD.
1435	VIBRATION, RANDOM. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1435.
1436	VIBRATION, RANDOM. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1538	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1374	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1545	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1545 MILLISECOND(S).
1546	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1546 MICROSECOND(S).
1457	NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.
2906	THERE SHALL BE NO CHANGE IN THE SHAFT POSITION.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1426
PER MIL-STD-202, METHOD 214.	1427
*TEST CONDITION (ROMAN NUMERAL AND LETTER)	1428
*DURATION OF APPLICATION (SELECT ONE)	
(MINUTES)	1438
(HOURS)	1431
MONITORING INSTRUMENTATION OF EXCITATION (SELECT ONE)	
ANY SUITABLE SYSTEM.	1452
CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.	1453
CALIBRATED OSCILLOSCOPE.	1459
NUMBER OF VIBRATION MONITORING TEST POINTS (QUANTITY)	1430

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1426	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1426.
1427	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 214 OF MIL-STD-202.
1428	TEST CONDITION NUMBER AND LETTER 1428 SHALL APPLY.
1438	THE DURATION OF THE TEST SHALL BE 1438 MINUTE(S).
1431	THE DURATION OF THE TEST SHALL BE 1431 HOUR(S).
1452	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE ANY SUITABLE INSTRUMENTATION SYSTEM.
1453	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.
1459	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED OSCILLOSCOPE.
1430	THERE SHALL BE 1430 VIBRATION MONITORING POINT(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
PER MIL-STD-202, METHOD 214. (CONT)	
LOCATION OF MONITORING POINTS (SELECT ONE)	
ANY SUITABLE LOCATION.	1439
AS CLOSE AS PRACTICAL TO TEST SPECIMEN.	1462
MONITOR CONTACT CHATTER IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202.	
*TEST CIRCUIT (LETTER)	1402
*TEST CONDITION (LETTER)	1382
PERCENT OF RATED LOAD APPLIED (PERCENT)	4678
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4977
NORMAL MOUNTING METHOD.	4976
MOUNT PER DOCUMENT (DOC DES)	4975
PER MIL-STD-167-1.	2908
TYPES OF VIBRATION REQUIRED (ROMAN NUMERAL)	2910

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1439	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE ANY SUITABLE LOCATION.
1462	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE AS CLOSE AS PRACTICAL TO THE TEST SPECIMEN(S).
1402	MONITORING DURING THE TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1402 SHALL APPLY.
1382	TEST CONDITION LETTER 1382 IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202 SHALL APPLY.
4678	THE LOAD SHALL BE 4678 PERCENT OF THE RATED LOAD.
4977	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4976	MOUNTING SHALL BE BY THE NORMAL METHOD.
4975	MOUNTING SHALL BE IN ACCORDANCE WITH 4975.
2908	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-167-1.
2910	TESTING SHALL BE PERFORMED PER TYPE 2910 CLASSIFICATION.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WATERPROOFNESS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2920
NO EVIDENCE OF WATER LEAKAGE.	2922
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2930
PER MIL-E-13856.	2932
TYPE (SELECT ONE)	
I.	2934
II.	2936
CLASS (SELECT ONE)	
1.	2938
2.	2940
3.	2942
4.	2944

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2920	WATERPROOFNESS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2920.
2922	WATERPROOFNESS. THERE SHALL BE NO EVIDENCE OF WATER LEAKAGE.
2930	WATERPROOFNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2930.
2932	WATERPROOFNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-E-13856.
2934	THE SWITCH SHALL BE CLASSIFIED AS TYPE I.
2936	THE SWITCH SHALL BE CLASSIFIED AS TYPE II.
2938	THE SWITCH SHALL BE CLASSIFIED AS CLASS 1.
2940	THE SWITCH SHALL BE CLASSIFIED AS CLASS 2.
2942	THE SWITCH SHALL BE CLASSIFIED AS CLASS 3.
2944	THE SWITCH SHALL BE CLASSIFIED AS CLASS 4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.

6870 WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.

ADDITIONAL REQUIREMENTS.

7001 (A) 7001.

7002 (B) 7002.

7003 (C) 7003.

7004 (D) 7004.

7005 (E) 7005.

6372 PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.

7630 PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.

7629 PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995
DEFINITION OF HERMETIC SEALING	
NOTE: AUTOMATIC WHEN CODES ARE USED TO REQUIRE HERMETIC SEALING.	
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

DEFINITION OF HERMETIC SEALING. FOR THE PURPOSE OF THIS DOCUMENT, A HERMETICALLY-SEALED ITEM IS ONE IN WHICH THE ELEMENT IS CONTAINED WITHIN A SEALED ENCLOSURE OF CERAMIC, GLASS OR METAL, OR A COMBINATION THEREOF, WHERE SEALING IS ACCOMPLISHED BY MATERIAL FUSION, WELDING, BRAZING OR SOLDERING.

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI


(Project EDS-A251)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX A


ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

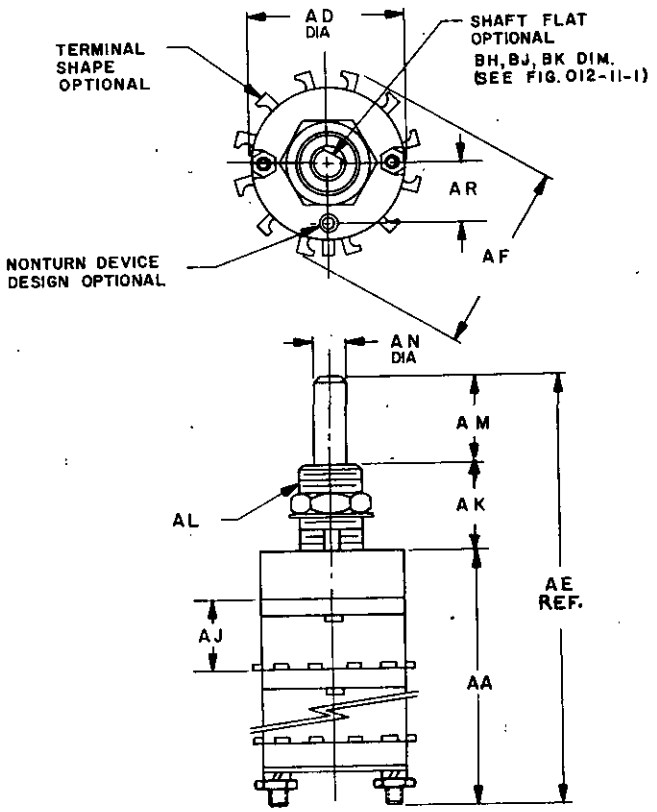


012-01-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

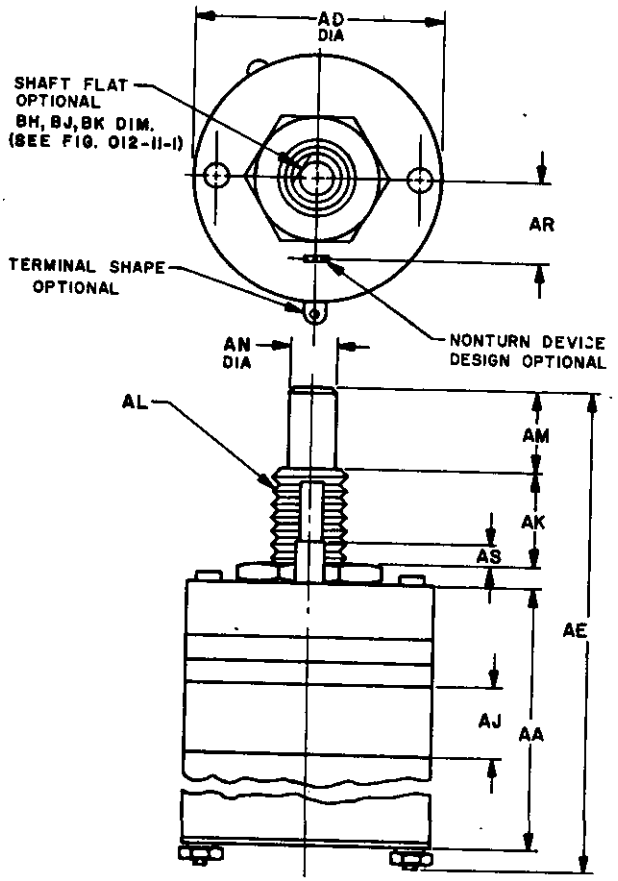


012-01-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

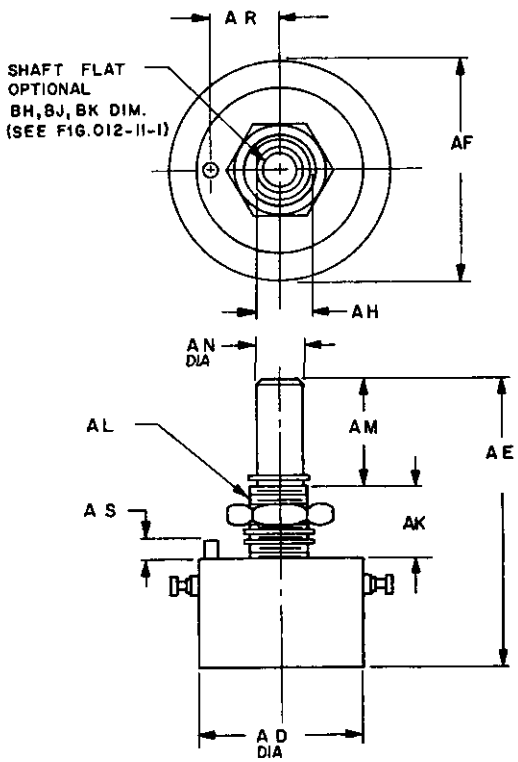


012-01-3

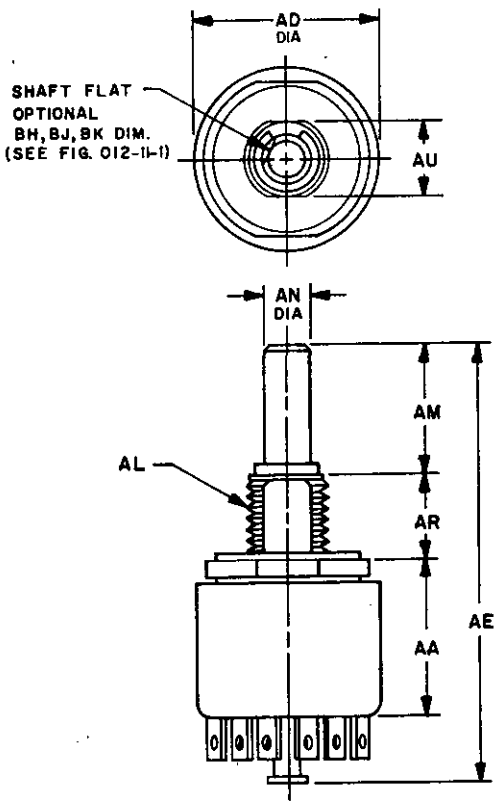


012-01-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

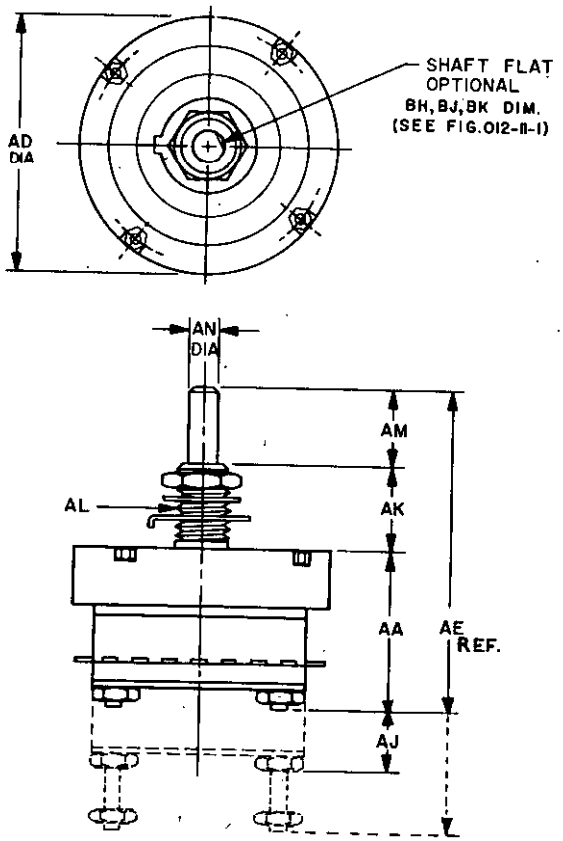



012-01-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

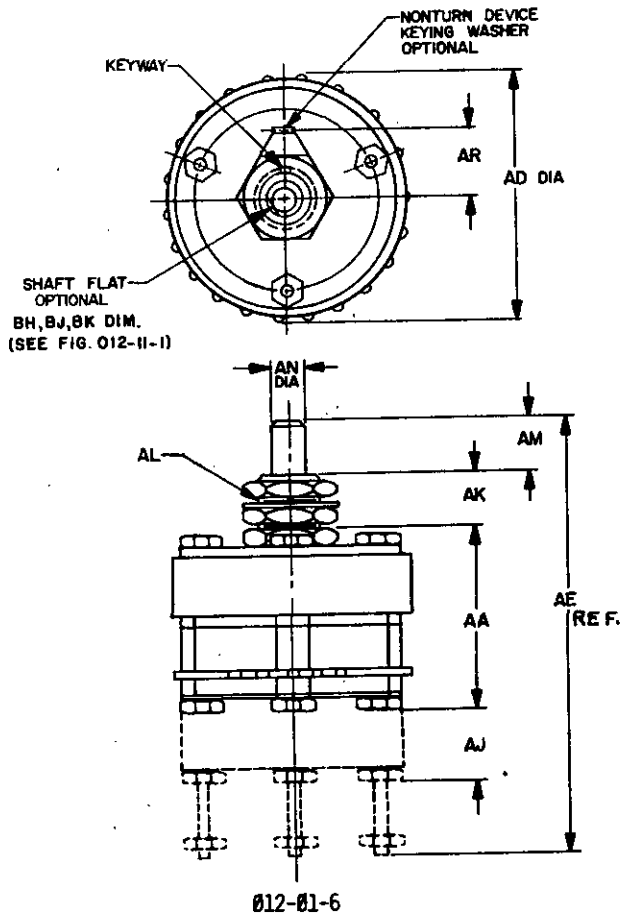



Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

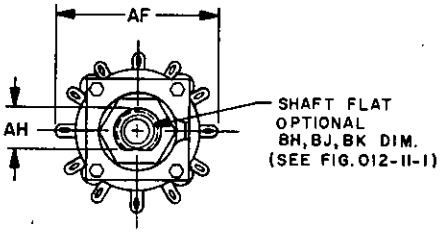

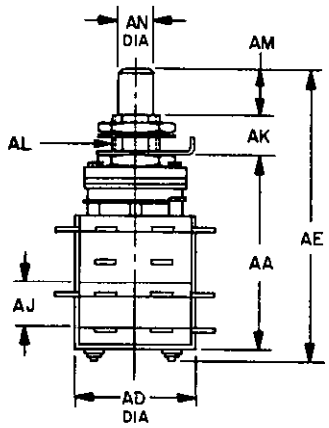


012-01-7

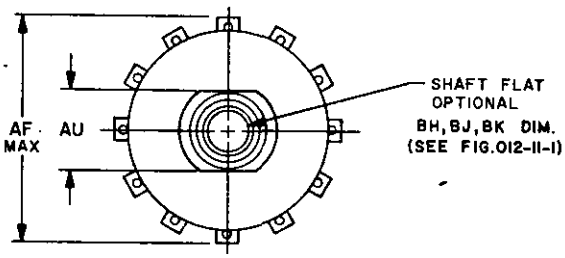

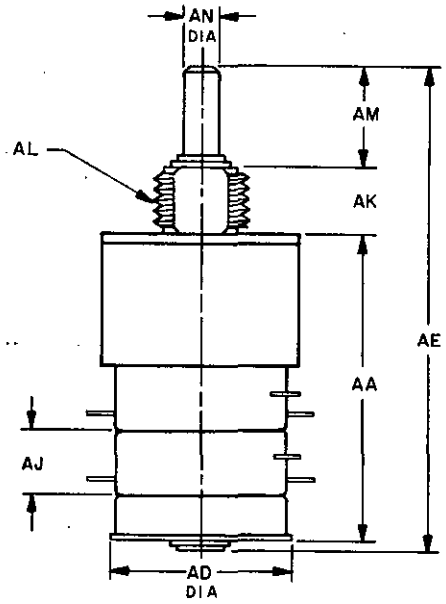


012-01-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

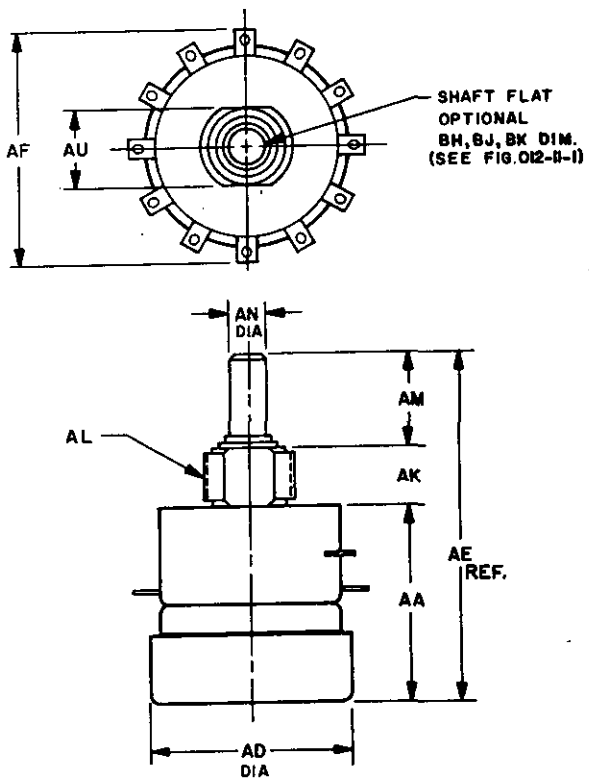


012-01-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

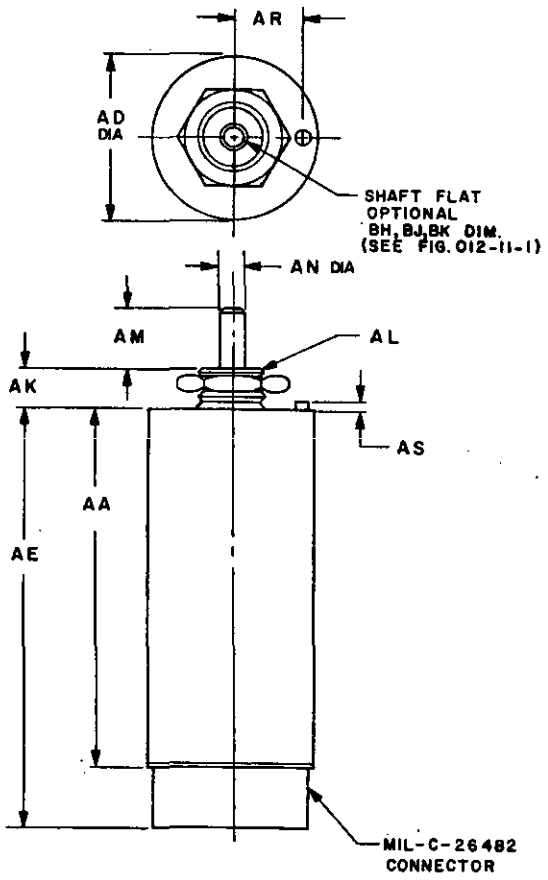


012-01-10

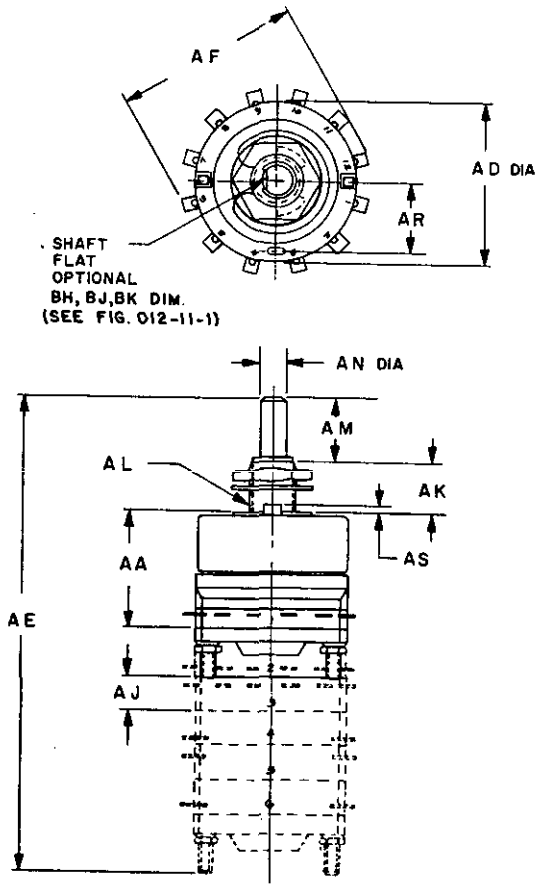


012-01-11

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

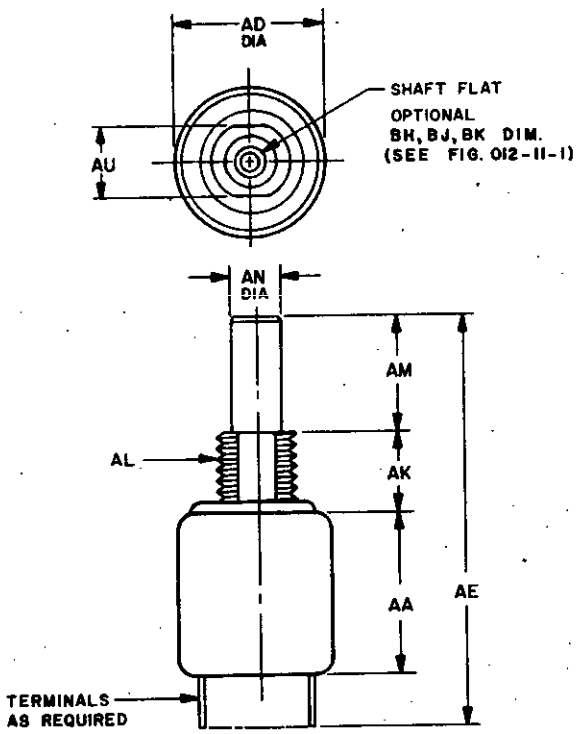


012-01-12

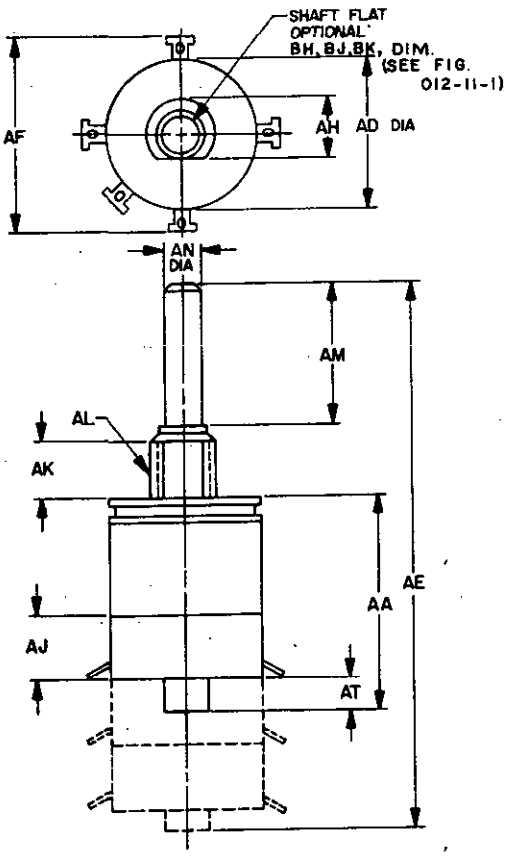


012-01-13

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

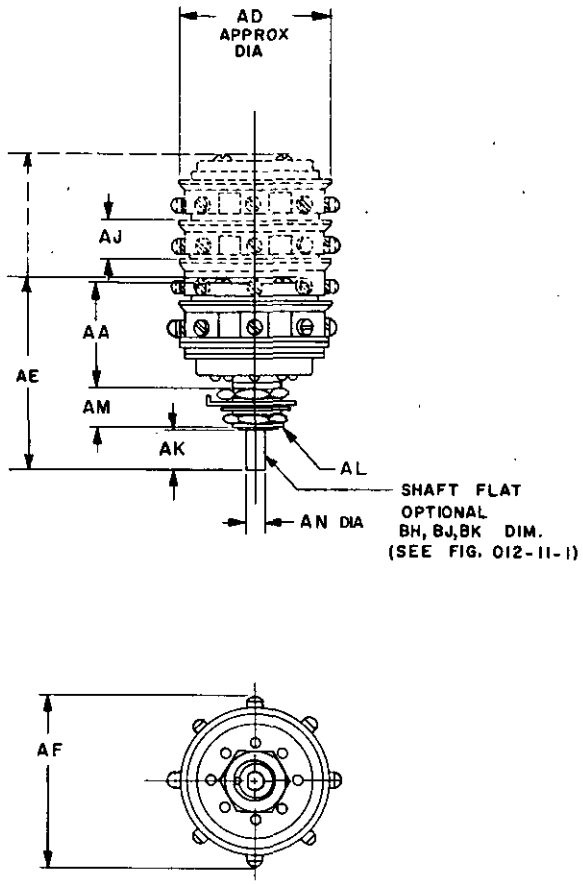


012-01-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

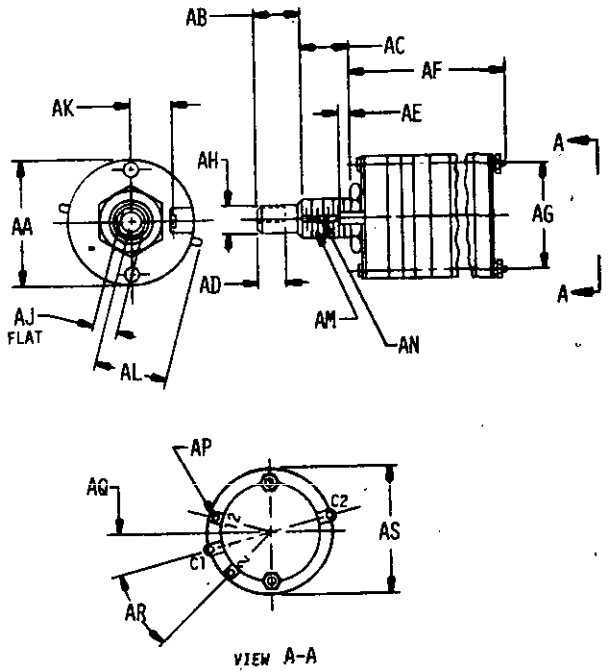


Ø12-Ø1-15

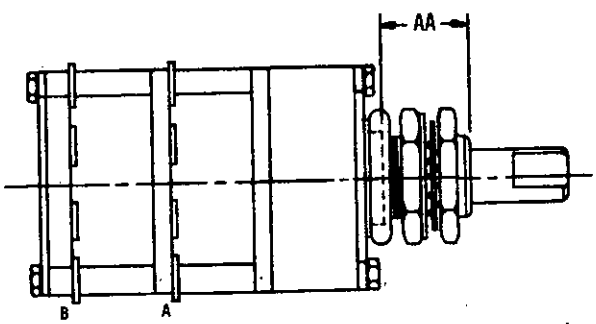

Ø12-Ø1-16


Source: https://assist.dla.mil -- Downloaded: 2026Ø1Ø-26T07:23Z
Check the source to verify that this is the current version before use.

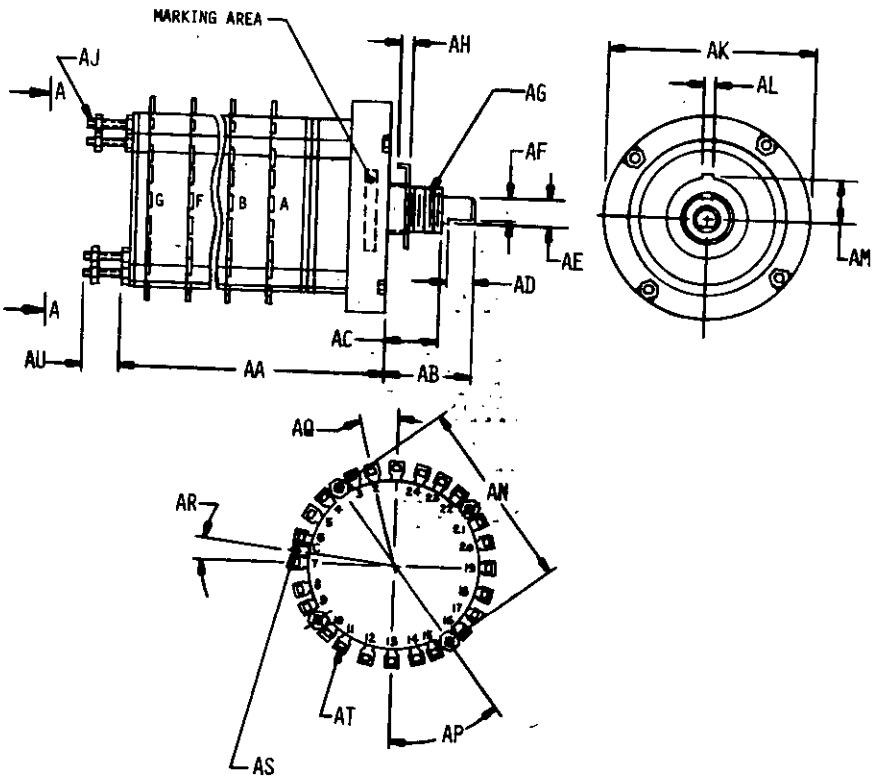

VIEW A-A


012-01-17

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

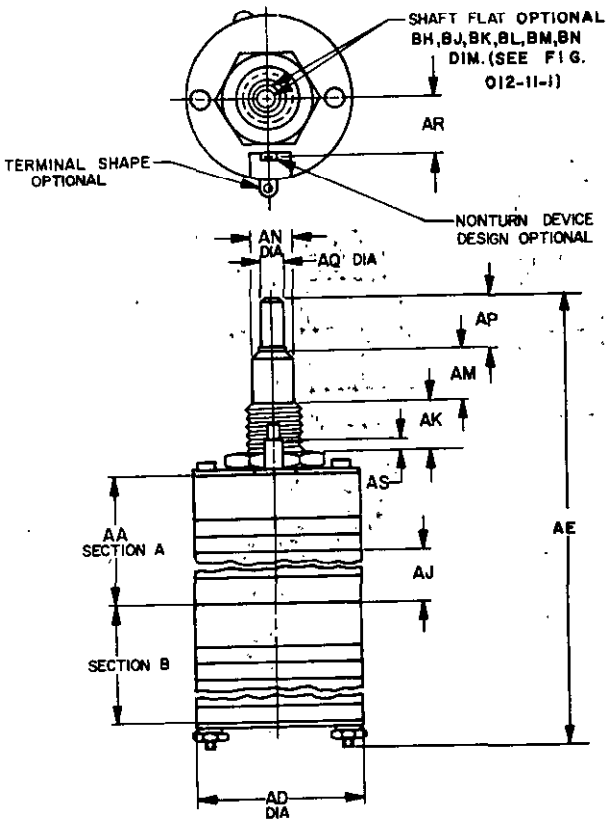


012-02-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

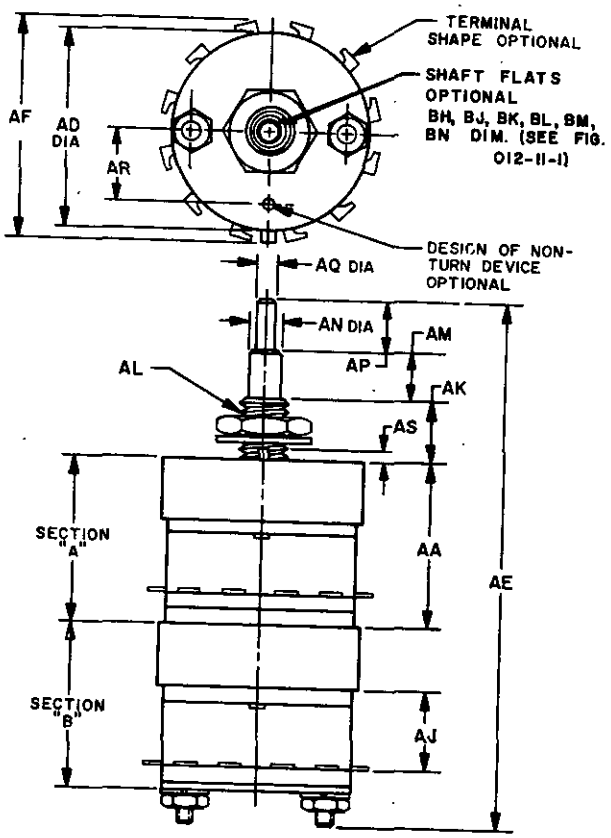


012-02-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

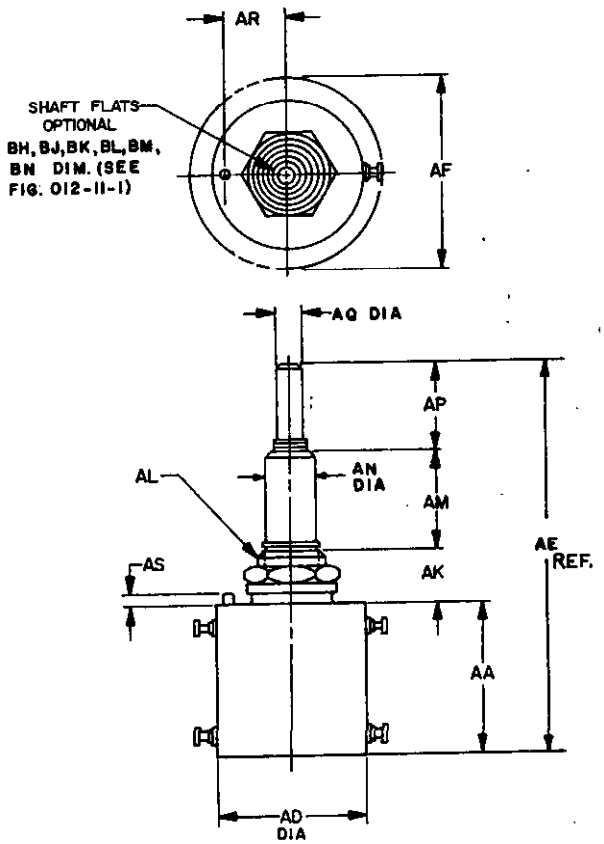


012-02-3

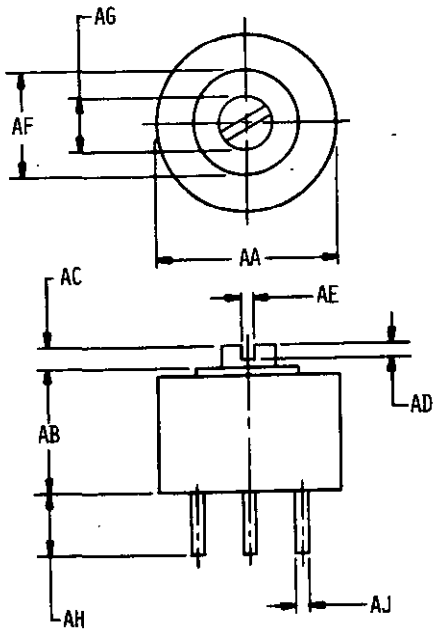


012-02-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

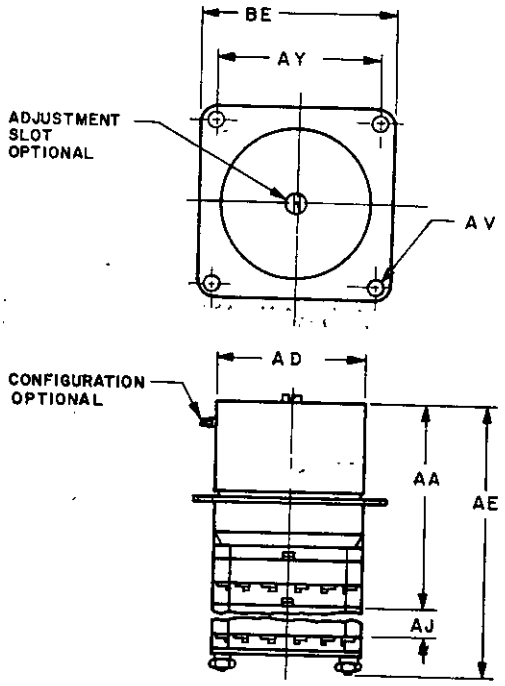


012-03-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

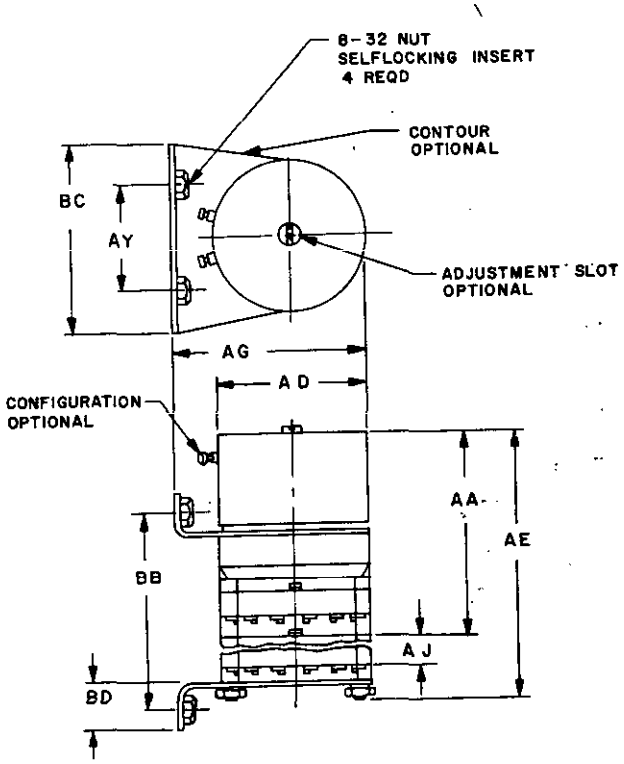


Ø12-Ø3-2

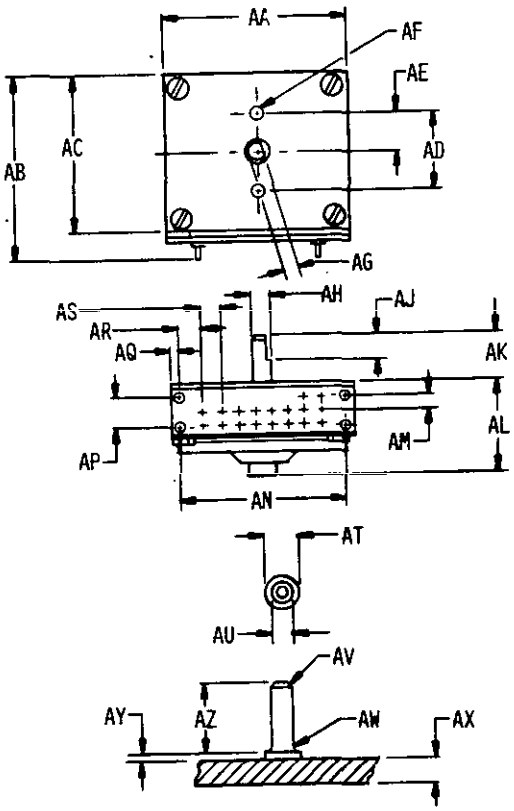


Ø12-Ø3-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

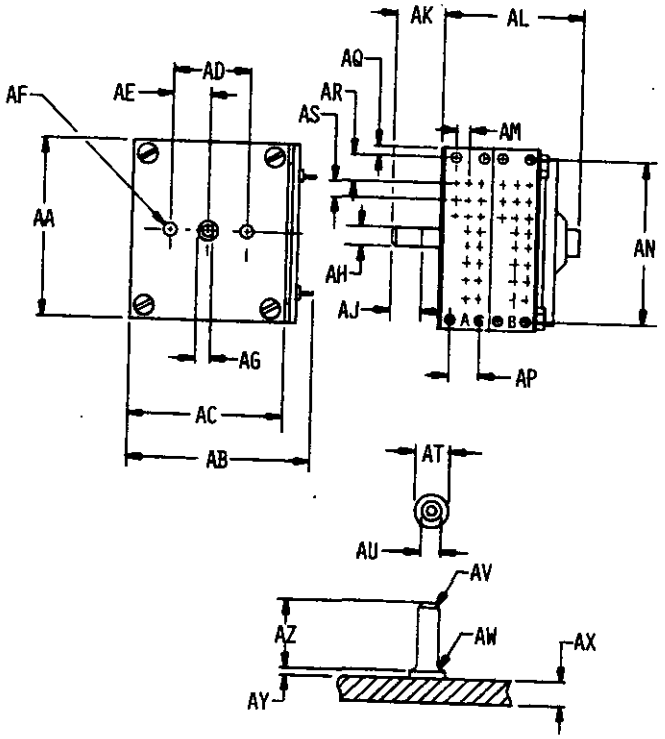


812-03-4

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

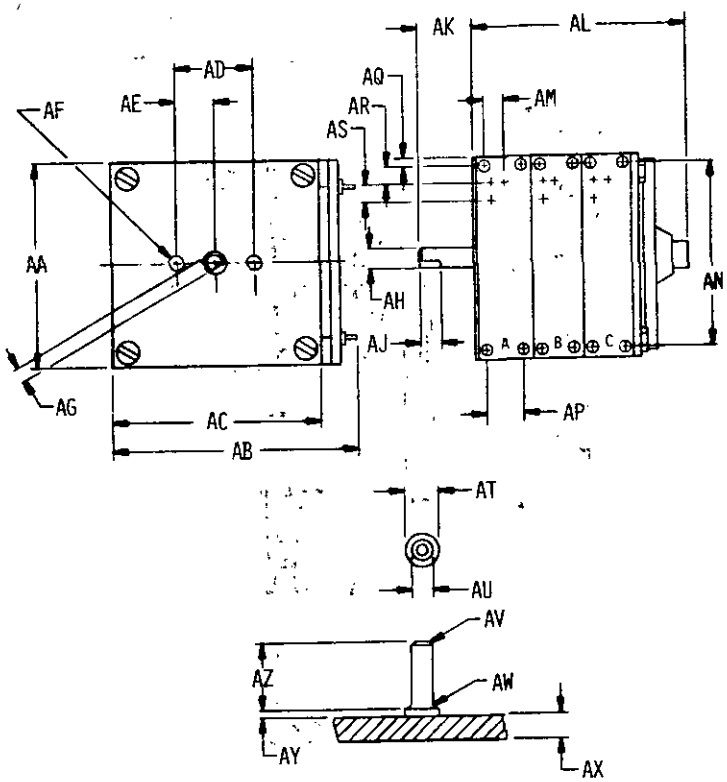


012-03-5

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

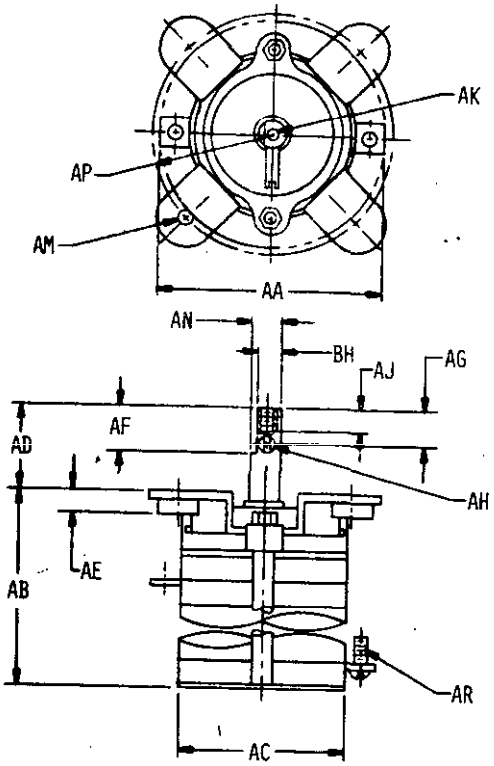


012-03-6

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

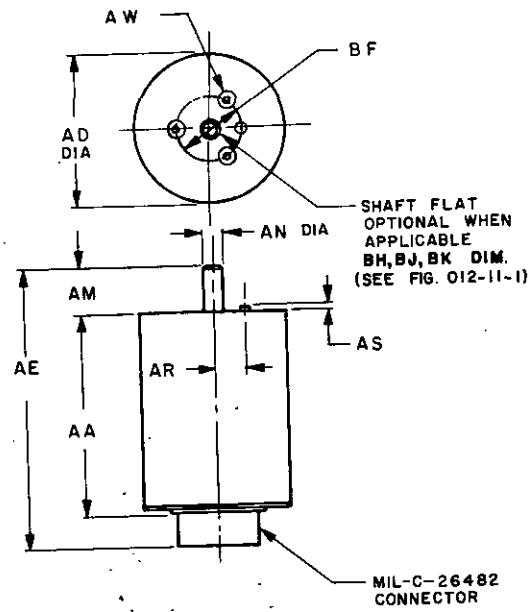


012-04-1

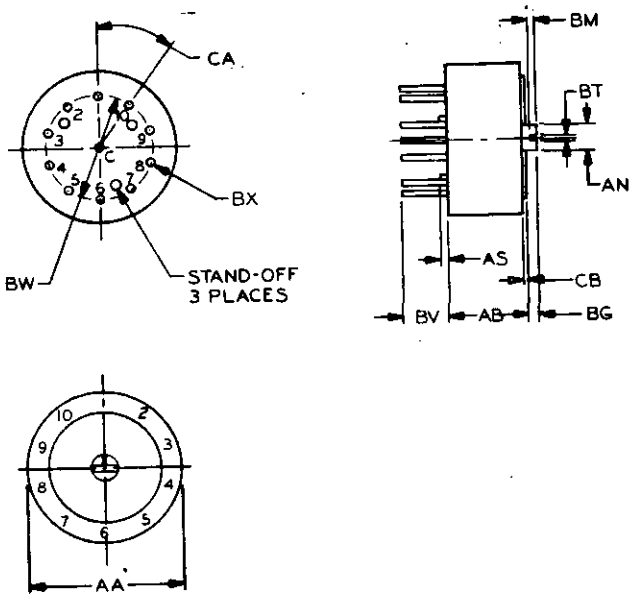


012-04-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

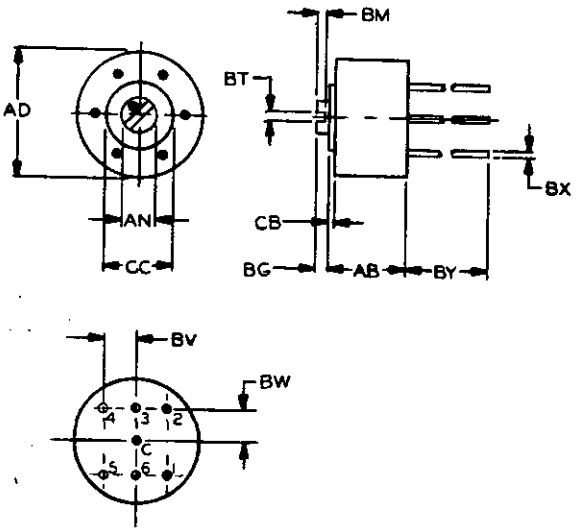


012-04-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

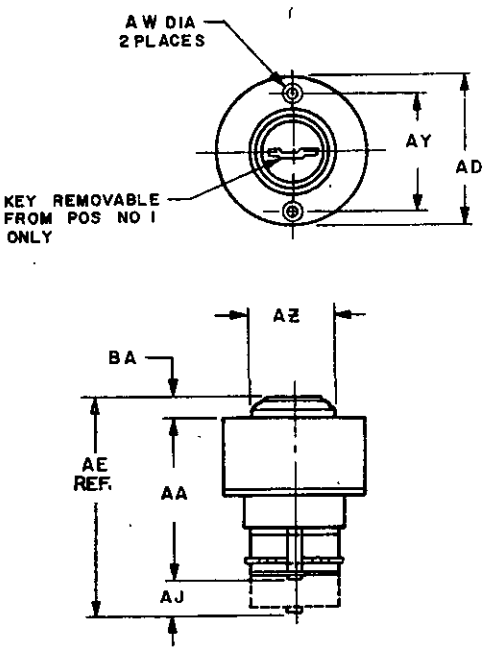


012-05-1

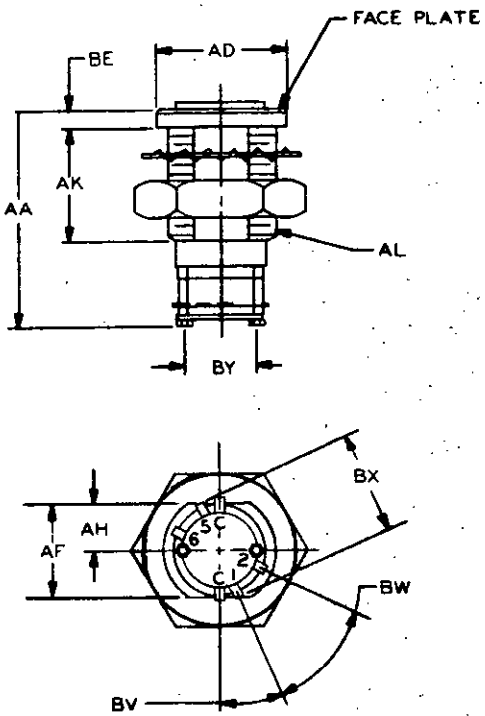


012-05-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

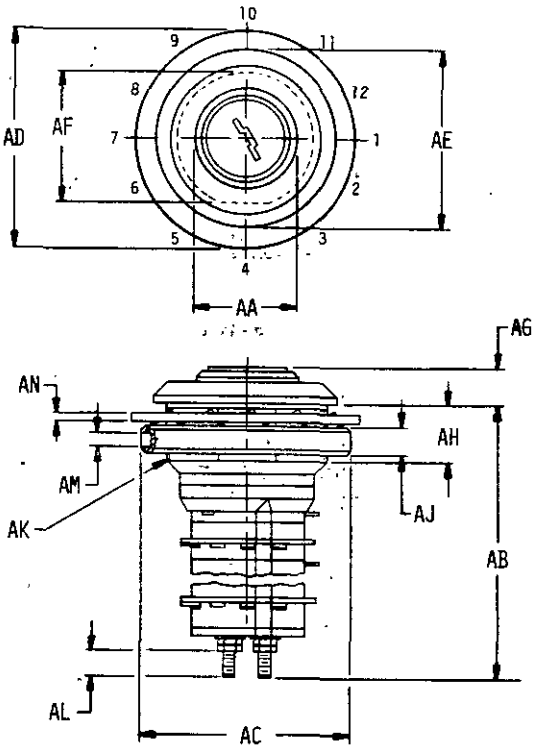


012-05-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

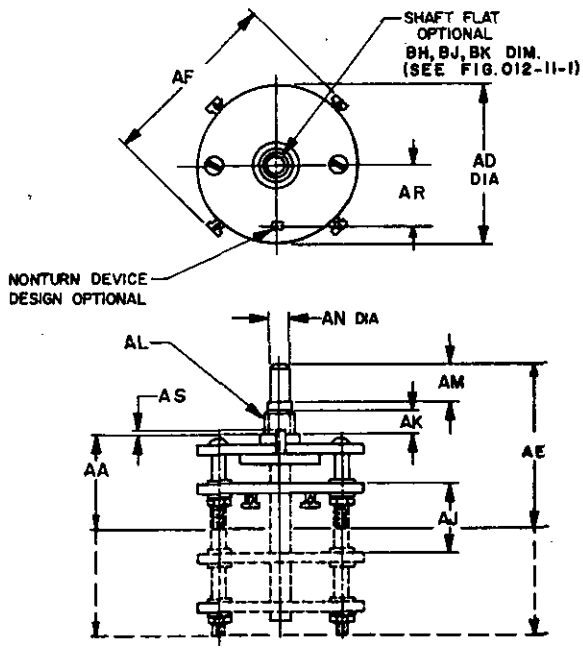


012-06-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

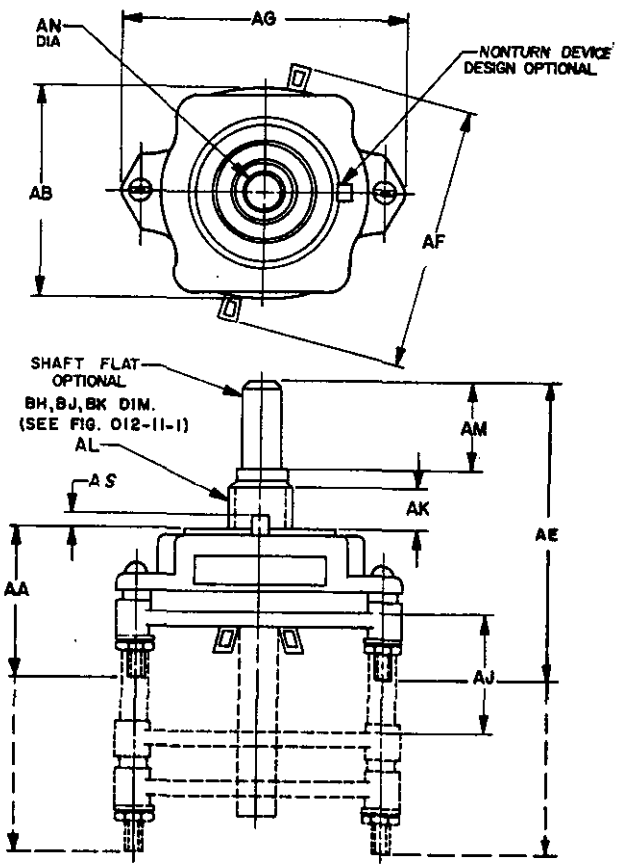


012-06-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

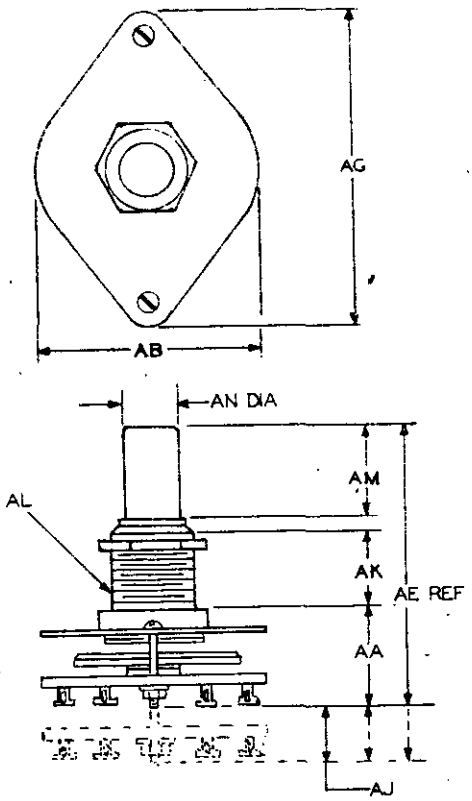



Ø12-Ø6-3

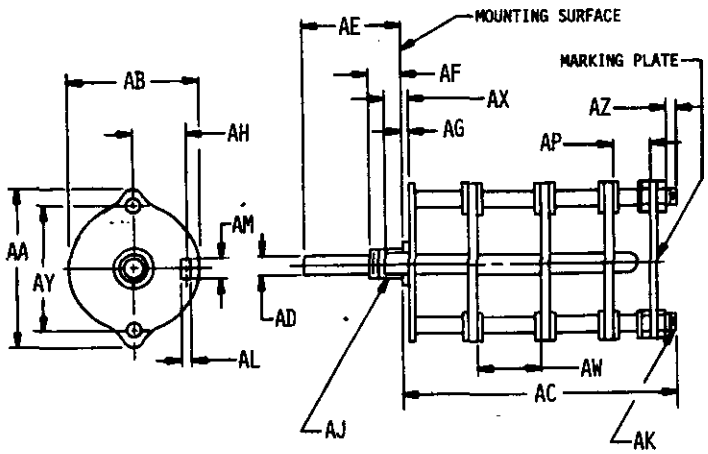

Ø12-Ø6-4

Source: https://assist.dla.mil -- Downloaded: 2026Ø1Ø-26T07:23Z
Check the source to verify that this is the current version before use.

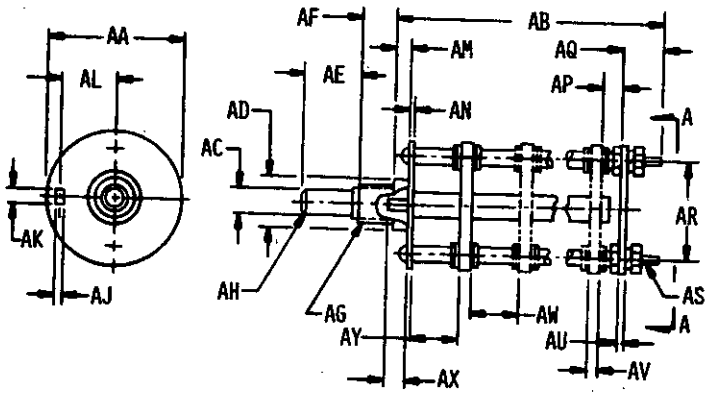





VIEW A-A

012-86-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

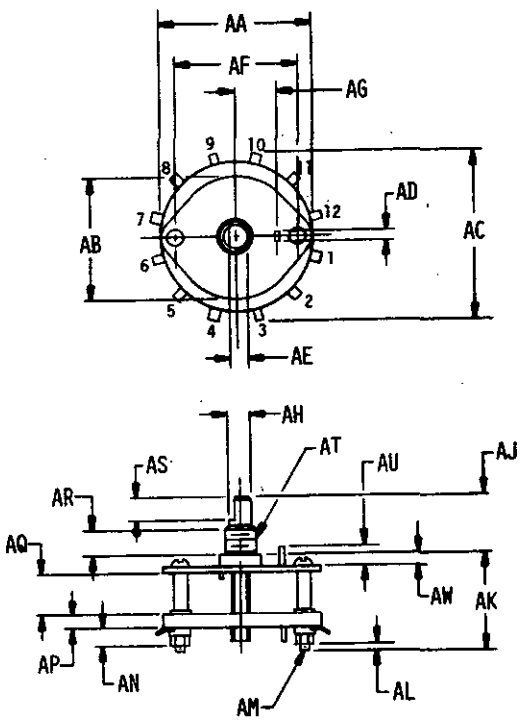


012-06-6

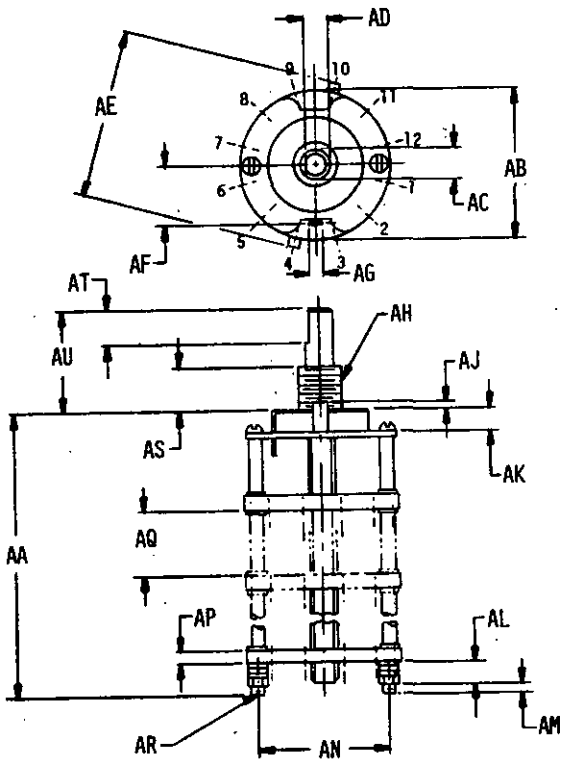


012-06-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

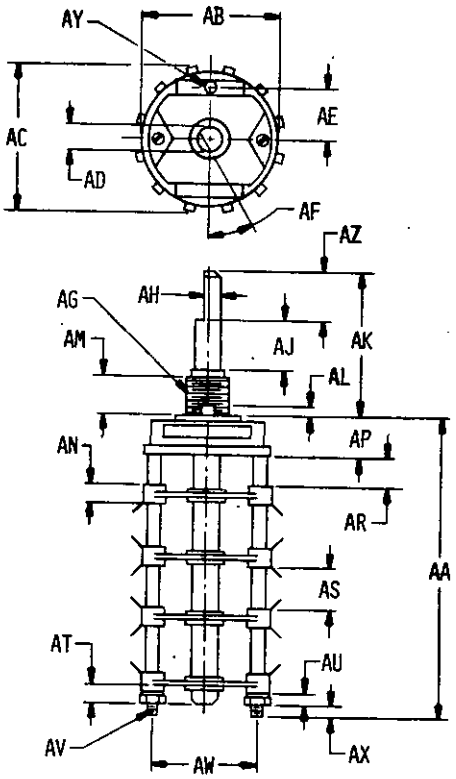


Ø12-Ø6-8

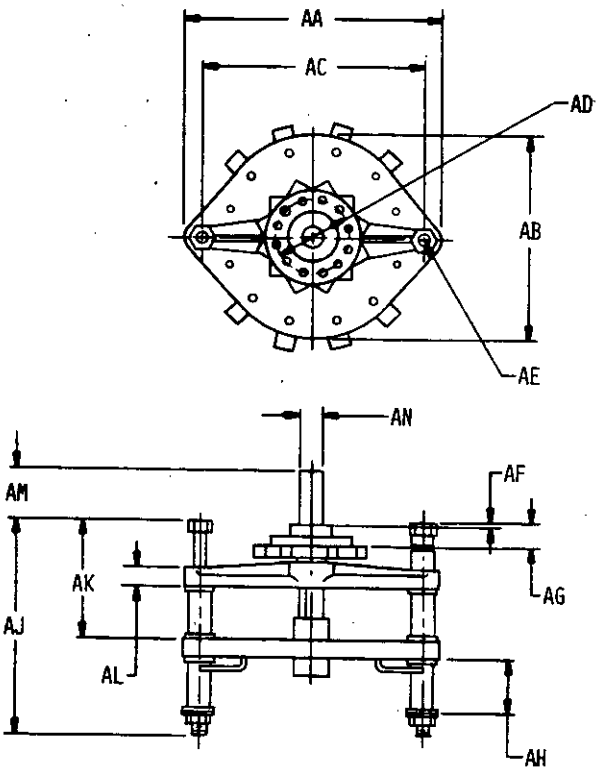


Ø12-Ø6-9

Source: https://assist.dla.mil -- Downloaded: 2026Ø1Ø-26T07:23Z
Check the source to verify that this is the current version before use.

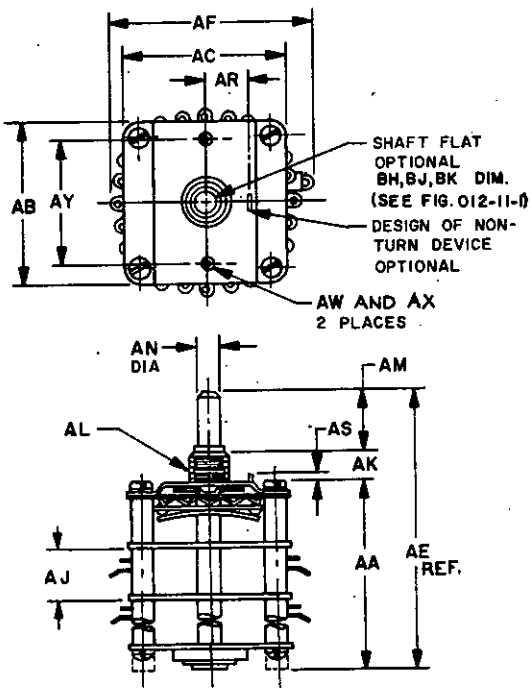


012-07-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

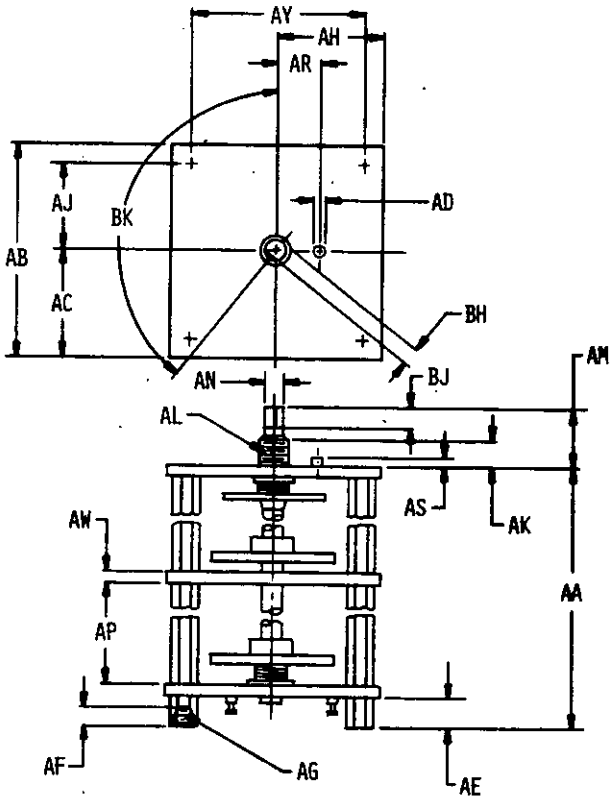


012-07-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

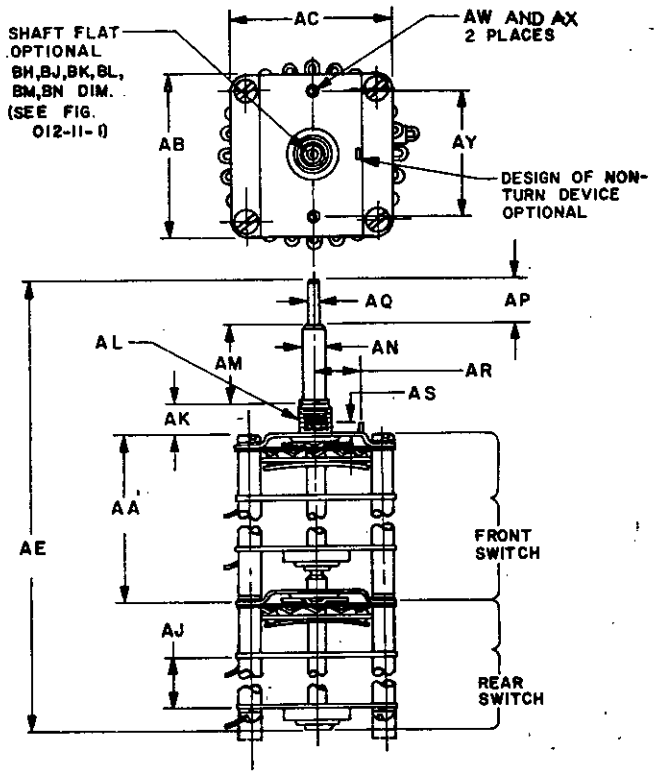



012-08-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

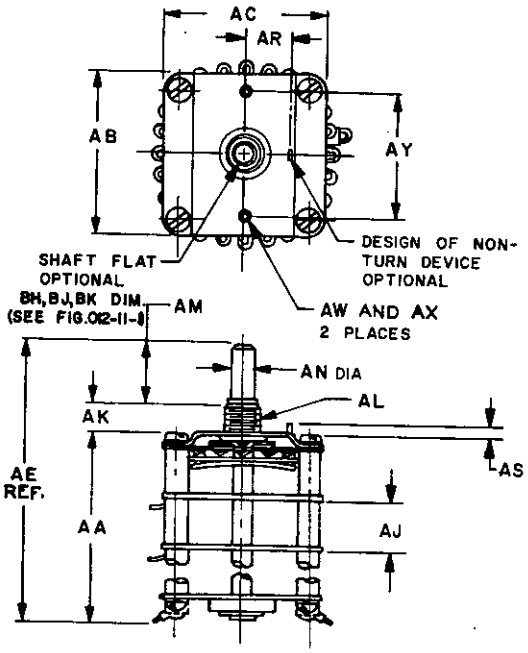


012-08-2

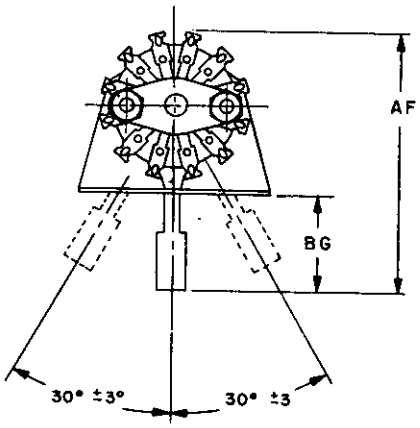

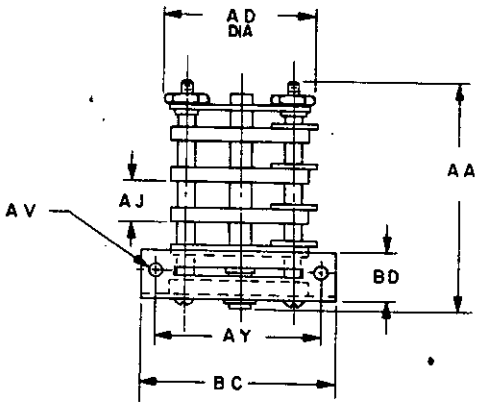


012-09-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

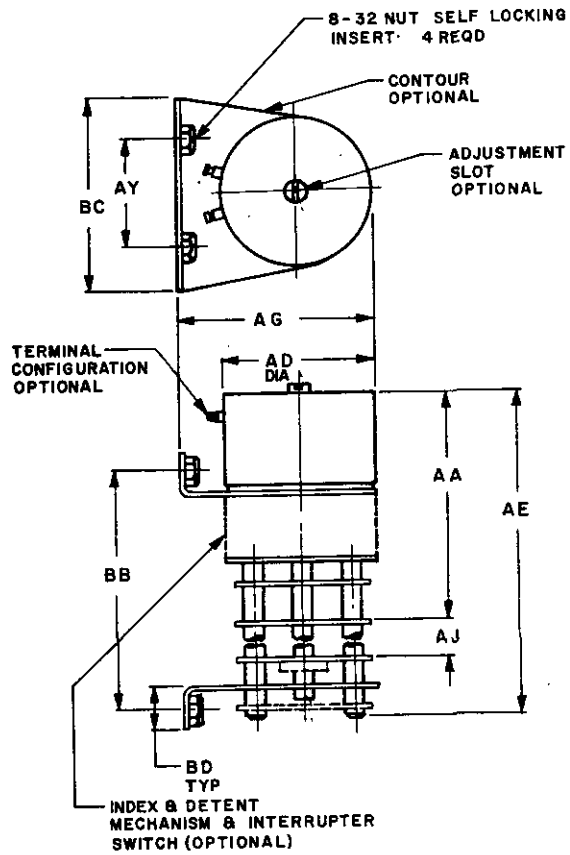


012-10-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

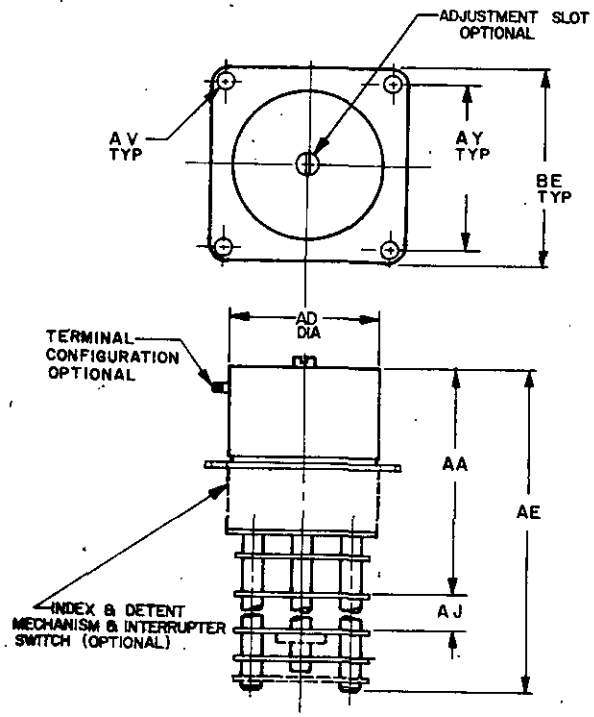



012-10-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

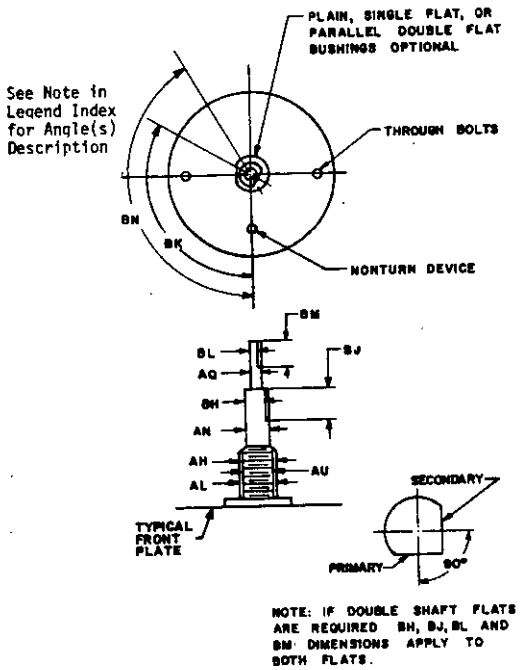


012-11-1

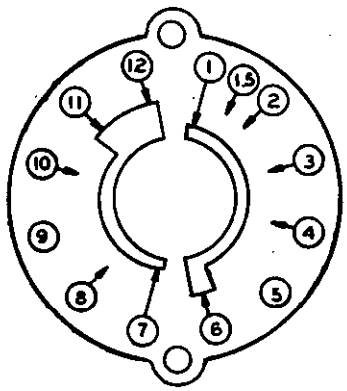

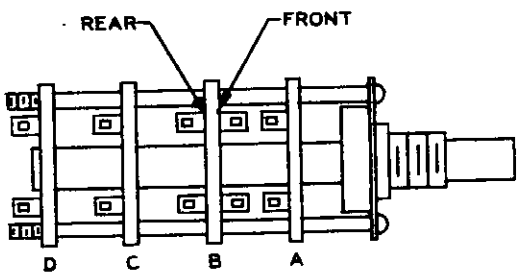


012-11-2

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

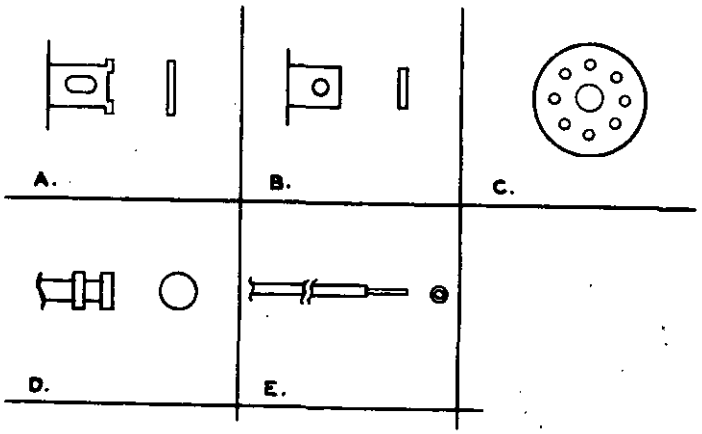


A. SOLDER TAB
B. QUICK DISCONNECT
C. CONNECTOR
D. TURRET
E. WIRE LEAD

Ø12-11-3

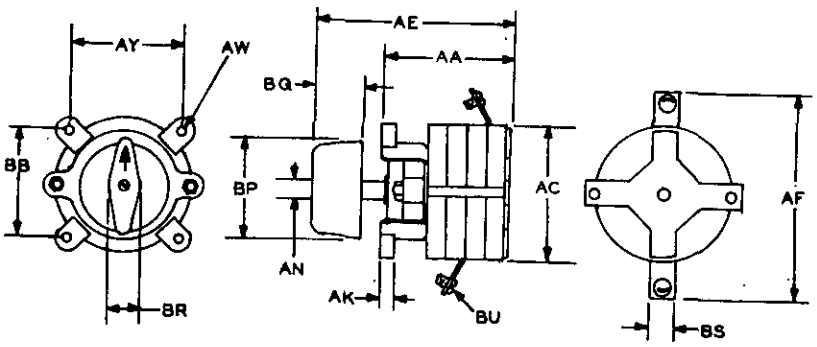


Ø12-12-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

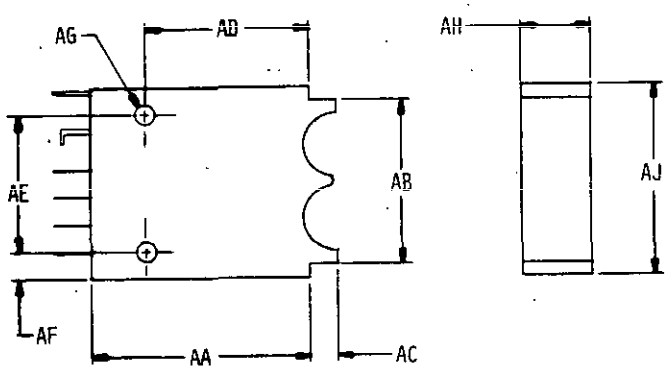

Ø12-13-1



Ø12-14-1

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B
CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	14	1407	104	1468	158	1539	148
0102	14	1410	180	1469	186	1545	194
0103	14	1411	180	1470	190	1546	194
0104	14	1412	180	1471	162	1547	54
0105	14	1413	182	1473	186	1548	56
0107	16	1414	182	1475	190	1549	56
0108	16	1416	182	1476	190	1550	156
0700	14	1418	180	1477	98	1551	162
0800	14	1419	180	1478	158	1552	186
1003	14	1420	182	1479	158	1553	190
1004	14	1421	182	1480	190	1557	56
1005	14	1426	196	1482	156	1558	56
1006	14	1427	196	1486	156	1562	44
1008	14	1428	196	1487	158	1564	44
1009	40	1429	128	1488	158	1566	46
1371	194	1430	196	1490	190	1568	44
1372	196	1431	196	1491	192	1569	44
1374	194	1432	130	1492	194	1570	44
1375	180	1433	180	1494	156	1571	44
1376	104	1435	194	1495	156	1572	44
1377	196	1436	194	1497	106	1575	44
1378	104	1438	196	1498	106	1577	42
1380	102	1439	198	1499	164	1578	42
1381	106	1442	188	1500	164	1579	42
1382	198	1444	188	1502	162	1580	42
1383	106	1446	186	1503	164	1582	42
1384	104	1447	188	1504	164	1583	42
1386	104	1448	188	1508	162	1585	46
1387	104	1449	132	1509	162	1590	46
1388	104	1451	156	1511	104	1592	46
1391	130	1452	196	1520	106	1594	46
1394	128	1453	196	1522	106	1596	46
1395	130	1455	186	1523	106	1598	46
1396	128	1456	186	1524	106	1599	46
1397	130	1457	194	1533	188	1601	48
1398	128	1459	196	1534	188	1602	48
1400	128	1462	198	1535	192	1603	48
1402	198	1464	156	1536	192	1605	48
1404	128	1466	190	1537	192	1606	48
1406	130	1467	190	1538	194	1607	48

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1608	50	1706	60	1810	68	1884	72
1609	50	1708	60	1812	68	1885	72
1611	50	1711	116	1814	68	1887	72
1613	50	1712	118	1816	68	1888	74
1614	50	1713	118	1818	68	1890	74
1616	48	1714	118	1820	70	1892	74
1619	50	1719	116	1822	70	1900	88
1620	48	1721	116	1824	70	1902	88
1622	48	1722	116	1826	70	1904	88
1624	50	1730	60	1828	70	1906	88
1626	50	1732	62	1830	70	1908	88
1628	50	1736	62	1832	70	1910	88
1630	50	1738	62	1834	70	1912	90
1632	50	1740	62	1836	70	1914	90
1660	58	1742	62	1840	70	1916	90
1662	58	1744	62	1842	74	1918	90
1663	58	1746	62	1844	74	1920	90
1664	60	1750	62	1846	74	1922	90
1665	60	1752	62	1848	74	1924	90
1666	58	1762	64	1850	74	1926	90
1668	58	1764	64	1852	74	1928	92
1670	58	1766	64	1854	74	1930	92
1672	58	1768	64	1856	72	1932	92
1674	92	1770	64	1858	76	1934	92
1676	94	1772	64	1860	72	1936	94
1678	58	1774	64	1862	76	1938	94
1680	92	1776	64	1864	76	1940	94
1682	58	1778	64	1866	76	1942	94
1683	76	1780	64	1868	76	1944	94
1684	58	1782	66	1870	76	1946	94
1686	74	1784	66	1872	76	1948	94
1688	58	1786	66	1874	76	1950	94
1690	60	1788	66	1876	76	1952	108
1692	60	1790	66	1877	76	1954	108
1694	60	1792	66	1878	76	1956	108
1696	50	1800	66	1879	76	1958	108
1698	50	1802	66	1880	72	1960	108
1700	60	1804	68	1881	72	1962	108
1702	60	1806	68	1882	72	1964	108
1704	68	1808	68	1883	72	1966	108

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1968	108	2028	31	2068	33	2124	112
1970	110	2029	31	2069	33	2125	112
1972	110	2030	31	2070	33	2126	112
1974	110	2031	31	2071	33	2128	114
1976	110	2032	31	2072	33	2130	114
1978	110	2033	31	2073	33	2132	114
1980	110	2034	31	2074	33	2134	114
1982	110	2035	31	2075	33	2136	114
1984	110	2036	31	2076	33	2138	114
1986	110	2037	31	2077	33	2140	114
1988	110	2038	31	2078	33	2142	114
1990	110	2039	31	2079	33	2144	114
1992	110	2040	31	2080	33	2146	114
2001	31	2041	31	2081	33	2148	114
2002	31	2042	31	2082	33	2150	116
2003	31	2043	31	2083	33	2152	116
2004	31	2044	31	2084	33	2154	116
2005	31	2045	33	2085	33	2156	116
2006	31	2046	33	2086	33	2158	116
2007	31	2047	33	2087	33	2160	116
2008	31	2048	33	2088	33	2162	116
2009	31	2049	33	2089	33	2164	118
2010	31	2050	33	2090	33	2166	118
2011	31	2051	33	2091	33	2168	118
2012	31	2052	33	2092	33	2170	118
2013	31	2053	33	2093	33	2172	118
2014	31	2054	33	2094	33	2174	118
2015	31	2055	33	2095	33	2176	118
2016	31	2056	33	2096	33	2178	118
2017	31	2057	33	2097	33	2180	120
2018	31	2058	33	2098	33	2182	120
2019	31	2059	33	2099	33	2184	120
2020	31	2060	33	2100	33	2186	120
2021	31	2061	33	2110	112	2188	120
2022	31	2062	33	2112	112	2190	120
2023	31	2063	33	2114	112	2192	120
2024	31	2064	33	2116	112	2194	120
2025	31	2065	33	2118	112	2200	120
2026	31	2066	33	2120	112	2202	122
2027	31	2067	33	2122	112	2204	122

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2206	122	2294	134	2382	162	2458	178
2208	122	2296	134	2384	164	2460	178
2210	122	2300	134	2386	164	2462	178
2212	122	2302	134	2388	166	2464	178
2214	122	2304	134	2390	166	2466	178
2216	122	2306	136	2391	166	2468	178
2218	122	2308	136	2392	166	2470	180
2220	122	2310	136	2393	166	2472	180
2222	124	2314	136	2394	166	2474	182
2224	124	2316	136	2395	166	2475	182
2226	124	2318	136	2396	166	2478	182
2230	124	2320	140	2397	166	2480	182
2232	124	2322	140	2400	170	2482	182
2234	124	2324	142	2402	170	2484	184
2236	124	2326	142	2404	170	2486	184
2238	124	2328	142	2406	170	2490	184
2240	124	2332	142	2408	170	2492	184
2242	124	2334	142	2410	170	2493	186
2244	124	2336	142	2412	170	2494	186
2250	126	2340	142	2414	170	2495	186
2252	126	2342	142	2416	170	2496	186
2254	126	2344	142	2418	170	2497	186
2256	126	2346	144	2420	170	2501	29
2258	126	2348	144	2422	170	2502	29
2260	126	2350	144	2424	170	2503	29
2262	126	2352	144	2426	172	2504	29
2264	126	2354	144	2428	172	2505	29
2266	126	2356	144	2430	172	2506	29
2268	126	2358	146	2432	172	2507	29
2270	128	2360	148	2434	172	2508	29
2272	128	2362	154	2436	172	2509	29
2274	128	2364	154	2438	172	2510	29
2276	130	2366	154	2440	172	2511	29
2280	132	2368	156	2442	172	2512	29
2282	132	2370	156	2444	176	2513	29
2284	132	2372	156	2446	178	2514	29
2286	132	2374	162	2450	178	2515	29
2288	134	2376	162	2452	178	2516	29
2290	134	2378	162	2454	178	2517	29
2292	134	2380	162	2456	178	2518	29

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2519	29	2559	29	2605	29	2646	829
2520	29	2560	29	2606	29	2647	829
2521	29	2561	29	2607	29	2648	829
2522	29	2562	29	2608	29	2649	829
2523	29	2563	29	2609	29	2650	829
2524	29	2564	29	2610	29	2651	829
2525	29	2566	29	2611	29	2652	829
2526	29	2567	29	2612	29	2653	829
2527	29	2568	29	2613	29	2654	829
2528	29	2569	29	2614	29	2655	829
2529	29	2570	29	2615	29	2656	829
2530	29	2571	29	2616	29	2657	829
2531	29	2572	29	2617	29	2672	829
2532	29	2573	29	2618	29	2701	25
2533	29	2574	29	2619	29	2702	25
2534	29	2575	29	2620	29	2703	25
2535	29	2576	29	2621	29	2704	25
2536	29	2577	29	2622	29	2705	25
2537	29	2578	29	2623	29	2706	25
2538	29	2579	29	2624	29	2707	25
2539	29	2580	29	2625	29	2708	25
2540	29	2581	29	2626	29	2709	25
2541	29	2582	29	2627	29	2710	25
2542	29	2583	29	2629	829	2711	25
2543	29	2584	29	2630	829	2712	25
2544	29	2585	29	2631	829	2713	25
2545	29	2586	29	2632	829	2714	25
2546	29	2587	29	2633	829	2715	25
2547	29	2588	29	2634	829	2716	25
2548	29	2589	29	2635	829	2717	25
2549	29	2590	29	2636	829	2718	25
2550	29	2591	29	2637	829	2719	25
2551	29	2592	29	2638	829	2720	25
2552	29	2593	29	2639	829	2721	25
2553	29	2594	29	2640	829	2722	25
2554	29	2596	29	2641	829	2723	25
2555	29	2601	29	2642	829	2724	25
2556	29	2602	29	2643	829	2725	25
2557	29	2603	29	2644	829	2726	25
2558	29	2604	29	2645	829	2727	25

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2728	25	2773	25	2817	27	2902	190
2729	25	2774	25	2818	27	2904	190
2730	25	2775	25	2819	27	2906	194
2731	25	2776	25	2820	27	2908	198
2732	25	2777	25	2821	27	2910	198
2733	25	2778	25	2822	27	2920	200
2734	25	2779	25	2823	27	2922	200
2735	25	2780	25	2824	27	2930	200
2736	25	2781	25	2825	27	2932	200
2737	25	2782	25	2826	27	2934	200
2738	25	2783	25	2828	27	2936	200
2743	25	2784	25	2829	27	2938	200
2744	25	2785	25	2830	27	2940	200
2745	25	2786	25	2831	27	2942	200
2746	25	2787	25	2832	27	2944	200
2747	25	2788	25	2833	27	3000	37
2748	25	2789	25	2834	27	3001	37
2749	25	2790	25	2835	27	3002	37
2750	25	2791	25	2836	27	3003	37
2751	25	2792	25	2837	27	3004	37
2752	25	2793	25	2838	27	3005	37
2753	25	2794	25	2839	27	3006	37
2754	25	2795	25	2840	27	3007	37
2755	25	2796	25	2841	27	3008	37
2756	25	2801	27	2842	27	3009	37
2758	25	2802	27	2843	27	3010	37
2759	25	2803	27	2844	27	3011	37
2760	25	2804	27	2845	27	3012	37
2761	25	2805	27	2846	27	3013	37
2762	25	2806	27	2847	27	3014	37
2763	25	2807	27	2849	27	3015	37
2764	25	2808	27	2850	27	3016	37
2765	25	2809	27	2851	27	3017	37
2766	25	2810	27	2852	27	3018	37
2767	25	2811	27	2853	27	3019	37
2768	25	2812	27	2854	27	3020	37
2769	25	2813	27	2855	27	3021	37
2770	25	2814	27	2856	27	3022	37
2771	25	2815	27	2857	27	3023	37
2772	25	2816	27	2900	190	3024	37

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3025	37	3066	37	3106	37	3147	37
3026	37	3067	37	3107	37	3148	37
3027	37	3068	37	3108	37	3149	37
3028	37	3069	37	3109	37	3150	37
3029	37	3070	37	3110	37	3151	37
3030	37	3071	37	3111	37	3152	37
3031	37	3072	37	3112	37	3153	37
3032	37	3073	37	3113	37	3154	37
3033	37	3074	37	3114	37	3155	37
3034	37	3075	37	3115	37	3156	37
3036	37	3076	37	3116	37	3157	37
3037	37	3077	37	3117	37	3158	37
3038	37	3078	37	3118	37	3159	37
3039	37	3079	37	3119	37	3160	37
3040	37	3080	37	3120	37	3161	37
3041	37	3081	37	3121	37	3162	37
3042	37	3082	37	3122	37	3163	37
3043	37	3083	37	3124	37	3164	37
3044	37	3084	37	3125	37	3165	37
3045	37	3085	37	3126	37	3166	37
3046	37	3086	37	3127	37	3167	37
3047	37	3087	37	3128	37	3168	37
3048	37	3088	37	3129	37	3169	37
3049	37	3089	37	3130	37	3170	37
3050	37	3090	37	3131	37	3171	37
3051	37	3091	37	3132	37	3172	37
3052	37	3092	37	3133	37	3173	37
3053	37	3093	37	3134	37	3174	37
3054	37	3094	37	3135	37	3175	37
3055	37	3095	37	3136	37	3176	37
3056	37	3096	37	3137	37	3177	37
3057	37	3097	37	3138	37	3178	37
3058	37	3098	37	3139	37	3179	37
3059	37	3099	37	3140	37	3180	37
3060	37	3100	37	3141	37	3181	37
3061	37	3101	37	3142	37	3182	37
3062	37	3102	37	3143	37	3183	37
3063	37	3103	37	3144	37	3184	37
3064	37	3104	37	3145	37	3185	37
3065	37	3105	37	3146	37	3186	37

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3187	37	3227	39	3267	39	3307	39
3188	37	3228	39	3268	39	3308	39
3189	37	3229	39	3269	39	3310	39
3190	37	3230	39	3270	39	3311	39
3191	37	3231	39	3271	39	3312	39
3192	37	3232	39	3272	39	3313	39
3193	37	3233	39	3273	39	3314	39
3194	37	3234	39	3274	39	3315	39
3195	37	3235	39	3275	39	3316	39
3196	37	3236	39	3276	39	3317	39
3197	37	3237	39	3277	39	3318	39
3198	37	3238	39	3278	39	3319	39
3199	37	3239	39	3279	39	3320	39
3200	37	3240	39	3280	39	3321	39
3201	37	3241	39	3281	39	3322	39
3202	37	3242	39	3282	39	3323	39
3203	37	3243	39	3283	39	3324	39
3204	39	3244	39	3284	39	3325	39
3205	39	3245	39	3285	39	3326	39
3206	39	3246	39	3286	39	3327	39
3207	39	3247	39	3287	39	3328	39
3208	39	3248	39	3288	39	3329	39
3209	39	3249	39	3289	39	3330	39
3210	39	3250	39	3290	39	3331	39
3211	39	3251	39	3291	39	3332	39
3212	39	3252	39	3292	39	3333	39
3213	39	3253	39	3293	39	3334	39
3214	39	3254	39	3294	39	3335	39
3215	39	3255	39	3295	39	3336	39
3216	39	3256	39	3296	39	3337	39
3217	39	3257	39	3297	39	3338	39
3218	39	3258	39	3298	39	3339	39
3219	39	3259	39	3299	39	3340	39
3220	39	3260	39	3300	39	3341	39
3221	39	3261	39	3301	39	3342	39
3222	39	3262	39	3302	39	3343	39
3223	39	3263	39	3303	39	3344	39
3224	39	3264	39	3304	39	3345	39
3225	39	3265	39	3305	39	3346	39
3226	39	3266	39	3306	39	3347	39

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3348	39	3388	39	3702	176	4137	160
3349	39	3389	39	3740	25	4138	160
3350	39	3390	39	3741	25	4139	160
3351	39	3391	39	3742	25	4142	160
3352	39	3392	39	3810	86	4143	160
3353	39	3393	39	3812	86	4144	160
3354	39	3394	39	3814	86	4145	160
3355	39	3395	39	3820	86	4146	160
3356	39	3396	39	3822	86	4147	160
3357	39	3397	39	3824	88	4662	168
3358	39	3398	39	3826	88	4663	168
3359	39	3399	39	3828	88	4664	168
3360	39	3439	25	3830	88	4665	168
3361	39	3500	20	3832	88	4666	168
3362	39	3502	22	3834	88	4667	168
3363	39	3504	22	4001	35	4669	138
3364	39	3506	22	4002	35	4671	138
3365	39	3508	22	4003	35	4672	168
3366	39	3510	22	4004	35	4674	166
3367	39	3512	22	4005	35	4675	168
3368	39	3514	22	4006	35	4677	168
3369	39	3516	22	4007	35	4678	198
3370	39	3518	22	4008	35	4683	168
3371	39	3520	22	4009	35	4684	164
3372	39	3522	22	4010	35	4685	164
3373	39	3524	24	4011	35	4686	164
3374	39	3526	24	4012	35	4689	138
3375	39	3528	24	4013	35	4691	138
3376	39	3530	44	4014	35	4692	138
3377	39	3532	44	4015	35	4694	138
3378	39	3600	90	4016	35	4695	138
3379	39	3602	90	4017	35	4698	138
3380	39	3604	90	4018	35	4700	136
3381	39	3606	90	4019	35	4701	136
3382	39	3608	90	4020	35	4703	162
3383	39	3610	92	4132	158	4707	188
3384	39	3612	92	4133	158	4708	188
3385	39	3614	92	4134	160	4709	188
3386	39	3616	92	4135	160	4713	184
3387	39	3700	174	4136	160	4714	184

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currentversion before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4715	184	4782	144	4856	82	4975	198
4717	86	4788	98	4859	80	4976	198
4718	136	4790	100	4861	82	4977	198
4719	184	4791	98	4862	82	4978	192
4722	184	4793	100	4863	54	4979	192
4723	184	4795	98	4864	54	4980	130
4726	184	4798	96	4865	54	4981	130
4729	192	4799	96	4867	84	4983	132
4730	192	4803	98	4868	56	4984	132
4731	192	4805	98	4869	84	4985	132
4732	150	4809	102	4870	84	4986	132
4734	150	4810	102	4872	148	4989	138
4735	154	4811	102	4874	82	4991	130
4736	152	4812	102	4875	82	5000	84
4737	150	4813	98	4878	144	5046	18
4738	150	4814	102	4884	78	5048	18
4739	150	4815	98	4885	78	5052	18
4740	152	4819	100	4886	78	5054	18
4741	150	4820	102	4890	100	5060	20
4742	152	4822	102	4891	80	5061	20
4743	154	4825	102	4892	56	5062	20
4745	148	4829	140	4893	56	5063	20
4746	148	4830	138	4894	78	5068	18
4748	148	4831	140	4897	86	5069	18
4749	152	4834	138	4900	80	5070	18
4750	152	4835	140	4901	78	5071	18
4751	154	4836	138	4902	82	6200	188
4752	154	4838	140	4904	18	6201	194
4754	96	4839	140	4905	18	6202	140
4755	96	4842	84	4906	78	6203	158
4756	96	4844	84	4908	78	6204	164
4760	94	4845	84	4950	40	6205	168
4761	96	4846	84	4952	148	6206	100
4762	96	4847	82	4956	148	6207	100
4765	146	4848	84	4958	146	6210	56
4766	146	4849	78	4959	146	6217	174
4770	146	4850	84	4960	148	6219	174
4771	146	4853	98	4969	100	6220	174
4772	146	4854	84	4970	100	6221	174
4773	146	4855	84	4971	100	6222	174

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
6224	174	6322	150	7027	42		
6225	174	6323	150	7028	42		
6226	54	6324	152	7029	42		
6228	174	6325	152	7030	42		
6229	174	6326	152	7301	18		
6231	176	6328	152	7302	18		
6233	56	6329	154	7345	54		
6234	176	6330	154	7580	40		
6235	176	6331	154	7629	202		
6236	176	6332	154	7630	202		
6237	176	6333	154	7631	20		
6238	176	6359	102	7632	20		
6239	56	6369	14	7633	20		
6250	54	6370	148	7645	20		
6251	54	6372	202				
6263	56	6870	202				
6264	56	6873	14				
6265	56	6874	16				
6267	86	6941	16				
6272	54	6942	16				
6273	54	6991	204				
6277	54	6992	204				
6279	140	6993	204				
6280	80	6994	204				
6292	80	6995	204				
6293	80	6996	52				
6294	80	6997	52				
6296	180	6998	52				
6299	148	6999	52				
6300	78	7001	202				
6308	80	7002	202				
6310	82	7003	202				
6311	80	7004	202				
6312	80	7005	202				
6315	176	7021	52				
6316	176	7022	52				
6318	174	7023	52				
6319	176	7024	52				
6320	150	7025	42				
6321	150	7026	42				

Source: https://assist.dla.mil -- Downloaded: 20261O-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Acceleration	54
Additional Part Marking	204
Additional Requirements	202
Altitude Rating	20
Aperture Cards Required	16
Applicable Documents	204
Base Document	14
Bushing Style	42
Capacitance	58
Circuit Configuration	60
Circuit Configuration Table	30
Circuitboard Termination	42
City, State, Zip	14
Classification	20
Coil Current	62
Coincidence of Operating & Release Points (Simultaneity)	66
Company Name/Command	14
Configuration	36
Connector	46
Contact Arrangement	40
Contact Resistance	66
Contract Number/Office Symbol	14
Control	14
Corona at Reduced Barometric Pressure	70
Corona at Sea Level	74
Date	14
Definition of Hermetic Sealing	204
Design and Construction	40
Design Reliability	38
Detent Mechanism	46
Dielectric Withstanding Voltage at Reduced Barometric Pressure	78
Dielectric Withstanding Voltage at Sea Level	82
Dummy Lugs	34
Electromagnetic Interference	86
Enclosure	40
Endurance, Electrical	88
Endurance, Mechanical	90
Explosion	92
Finishes	38
Format	14
Fungus	94

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Government Design Activity FSCM	14
Humidity	96
Illustrations	36
Immersion	100
Indexing Angle	40
Insulation Resistance	102
Intermediate Current Switching	108
Key Operated	46
Life, Low Level Switching at Reduced Barometric Pressure	120
Life, Low Level Switching at Sea Level	124
Life (Rotational) at Reduced Barometric Pressure	112
Life (Rotational) at Sea Level	116
Materials	36
Metals	38
Moisture Resistance	128
Mounting Hardware	202
Nomenclature	204
Non-Shorting Contacts	42
Nonturn Device	42
Notes	204
Operating Shaft End Style	46
Overload	132
Packaging	204
Part Marking	202
Part Number	16
Part Number Cross-Reference	204
Phone Number	14
Power Rating	20
Quality Assurance Provisions	204
Quick Disconnect Size	46
Rated Loads	24
Requester FSCM	14
Requester's Name	14

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Resistance to Soldering Heat	136
Resistance to Solvents	138
Revision of AEDPS Document Number	16
Rotational Torque/Operating Force	140
Salt Spray	144
Sand and Dust	146
Scope	16
Seal	148
Shock, High Impact	156
Shock, Specified Pulse	162
Short Circuit	164
Shorting Contacts	42
Solder Tab	44
Solderability	166
Solenoid Coil Current	44
Solenoid Coil Resistance	44
Solenoid Coil Voltage	44
Source Table	16
Stops	40
Stops Strength	170
Street/Building	14
Strength of Mounting Means	172
Superseded Document	204
Switch Construction	40
System Application	14
Tabulated Characteristics	36
Temperature, High	174
Temperature, Low	174
Temperature Rating	18
Temperature Rise	176
Terminal Strength	180
Termination	44
Thermal EMF	182
Thermal Shock (Temperature Cycling)	184
Truth Table	48
Type Designation	20
Units of Measure	16, 36
Vibration, High Frequency	186
Vibration, Low Frequency	190
Vibration, Random	194

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Waterproofness	200
Weight	52
Wire Lead	46
Workmanship	202

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-6B(MI), dated 5 January 1979 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
DOD-STD 35-6B

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander,
U.S. Army Missile R & D Command
ATTN: DRDMI-ESD
Redstone Arsenal, Alabama 35809

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.