DOD-STD-35-70A(MI)

15 December 1978
SUPERSEDING
MIL-STD-35-70(MI)
11 MARCH 1976

MILITARY STANDARD

SWITCHES, TOGGLE

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

FSC EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Switches, Toggle
Automated Engineering
Document Preparation System

DOD-STD-35-70A(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-70A(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for toggle switches.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	7
	2.1	Issues of documents	7
	2.2	Other publications	8
	3.	DEFINITIONS	9
	4.	GENERAL REQUIREMENTS	10
	4.1	Introduction	10
	4.2	Specification Requirement Sheet (SRS)	10
	4.3	Configuration	10
	4.3.1	Dimensions	10
	4.3.2	Illustrations	10
	4.4	Units of measure	10
	5.	DETAILED REQUIREMENTS	11
	5.1	Introduction	11
	5.2	MSE Formats	11
	5.3	Referenced documents	11
	5.4	Test matrix	11
	5.5	Tabulation	13
	5.6	Keyword Code Index (KCI) and Standard Paragraphs	15
	5.6.1	Interrelationship of Codes	15
	5.6.2	Automatic MSE Data	15
	5.6.3	DOD-STD-35 Tables	15

TABLES

Table	I.	Title Index	3
	II.	Test matrix	13
	III.	Tabulation candidates	14

APPENDICES

Appendix	A.	Illustrations	160
	B.	Characteristic Code Index	178
		Index	185

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for toggle switches.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. It is recommended that MIL-STD-1132, Selection and Use of Switches and Associated Hardware, be reviewed prior to using this dash-numbered part book.

The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been extablished for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
SWITCH, TOGGLE	015001	W-S-896	FLUSH MOUNTED
		MIL-S-3950	ENVIRONMENTALLY SEALED
		MIL-S-8834	POSITIVE BREAK
		MIL-S-9419	MOMENTARY
		MIL-S-13735	28 VDC
		MIL-S-27624	EXPLOSION PROOF
		MIL-S-81551	HERMETICALLY SEALED
		MIL-S-83731	UNSEALED AND SEALED
		MS14001	SINGLE POLE 25 AMPS
		MS14002	DOUBLE POLE 25 AMPS
		MS14003	4 POLE 25 AMPS
		MS16656	SINGLE POLE SINGLE THROW
		MS18150	2 CIRCUIT
		MS18151	1 POLE
		MS18152	2 POLE
		MS21026	MINIATURE SINGLE POLE
		MS21027	MINIATURE DOUBLE POLE
		MS21346	SINGLE POLE IWT
		MS21347	DOUBLE POLE IWT
		MS21350	SOLDER LUG SINGLE POLE
		MS21351	SOLDER LUG SINGLE POLE
		MS21352	SOLDER LUG DOUBLE POLE
		MS21353	SOLDER LUG DOUBLE POLE
		MS21354	PC BOARD TERM SINGLE POLE
		MS21355	PC BOARD TERM DOUBLE POLE
		MS21356	PC BOARD TERM SINGLE POLE

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
SWITCH, TOGGLE	015001 (CONT)	MS21357	PC BOARD TERM DOUBLE POLE
		MS24523	1 POLE
		MS24524	2 POLE
		MS24525	4 POLE
		MS24612	SCREW TERMINAL SINGLE POLE
		MS24613	SCREW TERMINAL DOUBLE POLE
		MS24614	SCREW TERMINAL 4 POLE
		MS24655	SOLDER LUG SINGLE POLE
		MS24656	SOLDER LUG DOUBLE POLE
		MS24658	1 POLE LEVER LOCK
		MS24659	2 POLE LEVER LOCK
		MS24660	4 POLE LEVER LOCK
		MS25306	SCREW TERMINAL SINGLE POLE
		MS25307	SCREW TERMINAL DOUBLE POLE
		MS25308	SCREW TERMINAL 4 POLE
		MS27406	4 POLE
		MS27407	2 POLE
		MS27408	2 POLE LEVER LOCK
		MS27409	4 POLE LEVER LOCK
		MS27708	4 POSITION
		MS27716	SINGLE POLE UNSEALED
		MS27717	DOUBLE POLE UNSEALED
		MS27718	SINGLE POLE TOGGLE SEAL
		MS27719	DOUBLE POLE TOGGLE SEAL
		MS27720	SINGLE POLE LEVER LOCK

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
SWITCHES, TOGGLE	015001 (CONT)	MS27721	DOUBLE POLE LEVER LOCK
		MS27722	1 POLE IWT
		MS27723	2 POLE IWT
		MS27724	4 POLE IWT
		MS27734	1 POLE SOLDER TERMINAL
		MS27735	2 POLE SOLDER TERMINAL
		MS27736	4 POLE SOLDER TERMINAL
		MS27737	1 POLE LEVER LOCK
		MS27738	2 POLE LEVER LOCK
		MS27739	4 POLE LEVER LOCK
		MS27753	DOUBLE POLE
		MS27754	DOUBLE POLE LEVER LOCK
		MS27781	1 POLE IWT LEVER LOCK
		MS27782	2 POLE IWT LEVER LOCK
		MS27783	4 POLE IWT LEVER LOCK
		MS27784	1 POLE IWT
		MS27785	2 POLE IWT
		MS27786	4 POLE IWT
		MS27787	1 POLE IWT
		MS27788	2 POLE IWT
		MS27789	4 POLE IWT
		MS27790	DOUBLE POLE UNSEALED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
SWITCHES, TOGGLE	015001 (CONT)	MS39061	24 VDC 25 AMP
		MS75028	1 POLE UNSEALED
		MS75029	2 POLE UNSEALED
		MS75075	2 POLE UNSEALED
		MS90310	SOLDER LUG SINGLE POLE
		MS90311	SOLDER LUG DOUBLE POLE

Source: https://assist.dla.mil - Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-S-6872	Soldering Process, General Specification For
MIL-S-8834	Switches, Toggle, Positive Break, General Specification For
MIL-S-9419	Switch, Toggle, Momentary, Four-position On, Center Off
MIL-E-13856	Electrical Components for Automotive Vehicles; Waterproofness Tests
MIL-F-13927	Fungus Resistance Test; Automotive Components
MIL-F-14256	Flux, Soldering, Liquid (Rosin Base)
MIL-S-81551	Switches, Toggle, Hermetically Sealed, General Specification For
MIL-S-83731	Switches, Toggle, Unsealed and Sealed Toggle, General Specification For

STANDARDS

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-454	Standard General Requirements for Electronic Equipment
MIL-STD-810	Environmental Test Methods

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

MIL-STD-1285 Marking of Electrical and Electronic Parts

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTME380 Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, Pa. 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Switches, Toggle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for toggle switches, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to toggle switches.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to toggle switches.

4.3.2 Illustrations. Illustrations applicable to toggle switches are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Test matrix. A test matrix is supplied as a guide for selecting documents to specify tests (see table II). The test matrix presents documents most applicable for use to satisfy the statement "TEST PER (DOC DES)". Any document listed in the Title Index may be used to satisfy the statement. However, the selected document from the Title Index must contain the desired test. Government test method documents and approved industry standards such as ASTM test methods may also be used to satisfy the statement "TEST PER (DOC DES)".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE II. TEST MATRIX.

DOCUMENT	TEST CODE	Actuating Force 2016	Circuit Configuration 2076	Electrical Endurance 2194	Mechanical Endurance 2224	Overload 2430	Ozone Resistance 2460	Short Circuit 2480	Stops Strength 2512	Strength of Actuation Means 2544	Strength of Mounting Means 2570	Temperature, High 2802	Temperature, Low 2800	Temperature Rise 2586	Toggle Ice (Icing) 2650
MIL-S-3950			X	X	X	X		X	X	X	X			X	
MIL-S-5594			X	X	X	X			X	X				X	
MIL-S-8834			X	X	X	X		X	X	X	X			X	X
MIL-S-9419		X	X	X		X			X	X					
MIL-S-13735		X		X	X	X	X			X	X	X	X		
MIL-S-81551				X	X	X	X	X		X	X	X	X		
MIL-S-83731			X	X	X	X		X	X	X	X			X	X

5.5 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table III provides codes for column headings which may be used for toggle switch characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
4000	RESISTIVE RATING POLE 1 VOLTS DC	4004	RESISTIVE RATING POLE 1 AMPS DC	4008	RESISTIVE RATING POLE 1 VOLTS AC
4016	RESISTIVE RATING POLE 1 AMPS AC	4020	INDUCTIVE RATING POLE 1 VOLTS DC	4024	INDUCTIVE RATING POLE 1 AMPS DC
4028	INDUCTIVE RATING POLE 1 VOLTS AC	4036	INDUCTIVE RATING POLE 1 AMPS AC	4040	MOTOR RATING POLE 1 VOLTS DC
4044	MOTOR RATING POLE 1 AMPS DC	4048	MOTOR RATING POLE 1 VOLTS AC	4056	MOTOR RATING POLE 1 AMPS AC
4064	LAMP RATING POLE 1 VOLTS DC	4068	LAMP RATING POLE 1 AMPS DC	4072	LAMP RATING POLE 1 VOLTS AC
4080	LAMP RATING POLE 1 AMPS AC				

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

5.6 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.6.1 Interrelationship of codes. The interralationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.6.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.6.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT	0700
ONE SECTION DOCUMENT	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6874 THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).

0107

0108 0108.

SCOPE

SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.

PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.

PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

6941 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.

6942 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE RATING	
MAXIMUM OPERATING (DEGREES CELSIUS)	5069
MAXIMUM NONOPERATING (DEGREES CELSIUS)	5071
MAXIMUM STORAGE (DEGREES CELSIUS)	7302
MAXIMUM SERVICE (DEGREES CELSIUS)	4905
MAXIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5054
MINIMUM OPERATING (DEGREES CELSIUS)	5068
MINIMUM NONOPERATING (DEGREES CELSIUS)	5070
MINIMUM STORAGE (DEGREES CELSIUS)	7301
MINIMUM SERVICE (DEGREES CELSIUS)	4904
MINIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5052
NOMINAL OPERATING (DEGREES CELSIUS)	5046
NOMINAL STORAGE (DEGREES CELSIUS)	5048

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	TEMPERATURE RATING.
5069	THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS.
5071	THE MAXIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5071 DEGREES CELSIUS.
7302	THE MAXIMUM STORAGE TEMPERATURE RATING SHALL BE 7302 DEGREES CELSIUS.
4905	THE MAXIMUM SERVICE TEMPERATURE RATING SHALL BE 4905 DEGREES CELSIUS.
5054	THE MAXIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5054 DEGREES CELSIUS.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.
5070	THE MINIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5070 DEGREES CELSIUS.
7301	THE MINIMUM STORAGE TEMPERATURE RATING SHALL BE 7301 DEGREES CELSIUS.
4904	THE MINIMUM SERVICE TEMPERATURE RATING SHALL BE 4904 DEGREES CELSIUS.
5052	THE MINIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5052 DEGREES CELSIUS.
5046	THE NOMINAL OPERATING TEMPERATURE RATING SHALL BE 5046 DEGREES CELSIUS.
5048	THE NOMINAL STORAGE TEMPERATURE RATING SHALL BE 5048 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
POWER RATING	
MINIMUM POWER (SELECT ONE)	
(WATTS)	7631
(KILOWATTS)	7632
(MILLIWATTS)	7633
(VOLTAMPERES)	7645
MAXIMUM POWER (SELECT ONE)	
(WATTS)	7634
(KILOWATTS)	7635
(MILLIWATTS)	7636
(VOLTAMPERES)	7646
NOMINAL POWER (SELECT ONE)	
(WATTS)	7637
(KILOWATTS)	7638
(MILLIWATTS)	7639
(VOLTAMPERES)	7647

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	POWER RATING.
7631	THE MINIMUM POWER RATING SHALL BE 7631 WATT(S).
7632	THE MINIMUM POWER RATING SHALL BE 7632 KILOWATT(S).
7633	THE MINIMUM POWER RATING SHALL BE 7633 MILLIWATT(S).
7645	THE MINIMUM POWER RATING SHALL BE 7645 VOLTAMPERE(S).
7634	THE MAXIMUM POWER RATING SHALL BE 7634 WATT(S).
7635	THE MAXIMUM POWER RATING SHALL BE 7635 KILOWATT(S).
7636	THE MAXIMUM POWER RATING SHALL BE 7636 MILLIWATT(S).
7646	THE MAXIMUM POWER RATING SHALL BE 7646 VOLTAMPERE(S).
7637	THE NOMINAL POWER RATING SHALL BE 7637 WATT(S).
7638	THE NOMINAL POWER RATING SHALL BE 7638 KILOWATT(S).
7639	THE NOMINAL POWER RATING SHALL BE 7639 MILLIWATT(S).
7647	THE NOMINAL POWER RATING SHALL BE 7647 VOLTAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ALTITUDE RATING	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5060
SEA LEVEL TO (METERS)	5061
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5062
SEA LEVEL TO (METERS)	5063

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ALTITUDE RATING.
5060	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5060 FEET.
5061	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5061 METERS.
5062	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5062 FEET.
5063	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5063 METERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RATINGS	
CONTACT RATINGS	
NOTE: SEE CONTACT RATINGS TABLE.	

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

CONTACT RATINGS. THE CONTACT RATINGS SHALL BE AS SPECIFIED IN THE CONTACT RATINGS TABLE.

CONTACT RATING TABLE

CHARACTERISTIC OR PARAMETER	LOAD TYPE	POLE 1	POLE 2	POLE 3	POLE 4
VOLTS D.C.	RESISTIVE	4000	4001	4002	4003
AMPERES D.C.	RESISTIVE	4004	4005	4006	4007
VOLTS A.C. (RMS)	RESISTIVE	4008	4009	4010	4011
FREQUENCY (HERTZ)	RESISTIVE	4012	4013	4014	4015
AMPERES A.C.	RESISTIVE	4016	4017	4018	4019
VOLTS D.C.	INDUCTIVE	4020	4021	4022	4023
AMPERES D.C.	INDUCTIVE	4024	4025	4026	4027
VOLTS A.C. (RMS)	INDUCTIVE	4028	4029	4030	4031
FREQUENCY (HERTZ)	INDUCTIVE	4032	4033	4034	4035
AMPERES A.C.	INDUCTIVE	4036	4037	4038	4039
VOLTS D.C.	MOTOR	4040	4041	4042	4043
AMPERES D.C.	MOTOR	4044	4045	4046	4047
VOLTS A.C. (RMS)	MOTOR	4048	4049	4050	4051
FREQUENCY (HERTZ)	MOTOR	4052	4053	4054	4055
AMPERES A.C.	MOTOR	4056	4057	4058	4059
AMPERES A.C.	LOCKED ROTOR	4060	4061	4062	4063
VOLTS D.C.	LAMP	4064	4065	4066	4067
AMPERES D.C.	LAMP	4068	4069	4070	4071
VOLTS A.C. (RMS)	LAMP	4072	4073	4074	4075
FREQUENCY (HERTZ)	LAMP	4076	4077	4078	4079
AMPERES A.C.	LAMP	4080	4081	4082	4083
4084	4085	4086	4087	4088	4089
4090	4091	4092	4093	4094	4095
4096	4097	4098	4099	4100	4101
4102	4103	4104	4105	4106	4107
4108	4109	4110	4111	4112	4113

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RATINGS (CONT)	
CONTACT RATINGS (CONT)	
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
*UNITS (SELECT ONE)	
U.S.	
INCHES.	7572
SI (SELECT ONE)	
CENTIMETERS.	7576
MILLIMETERS.	7577
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950
NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

CONTACT RATING TABLE (CONT)

NOTE A: 4130.

NOTE B: 4131.

NOTE C: 4132.

NOTE D: 4133.

NOTE E: 4134.

CONFIGURATION.

1009 CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.

7572 ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.

7576 ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN CENTIMETERS OR DEGREES.

7577 ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.

4950 ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	
MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE IX IS USED.	
METALS	
DISSIMILAR METALS.	7580
DESIGN AND CONSTRUCTION	
ENCLOSURE (SELECT ONE)	
ENVIRONMENTALLY SEALED.	1562
WATERPROOF.	1564
NONWATERPROOF.	1566
EXPLOSION PROOF.	1568
HERMETICALLY SEALED.	1570

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
	FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
7580	METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.
	DESIGN AND CONSTRUCTION.
1562	ENCLOSURE. THE ITEM(S) ENCLOSURE SHALL BE ENVIRONMENTALLY SEALED.
1564	ENCLOSURE. THE ITEM(S) ENCLOSURE SHALL BE WATERPROOF.
1566	ENCLOSURE. THE ITEM(S) ENCLOSURE SHALL BE NONWATERPROOF.
1568	ENCLOSURE. THE ITEM(S) ENCLOSURE SHALL BE EXPLOSION PROOF.
1570	ENCLOSURE. THE ITEM(S) ENCLOSURE SHALL BE HERMETICALLY SEALED.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
ENCLOSURE (CONT)	
UNSEALED.	1572
SEALED.	1574
OTHER ____	1576
CONTACT ARRANGEMENT	
CIRCUIT (NUMBER)	1620
FORM (DESIGNATION)	1622
SPST.	1624
SPDT.	1626
DPDT.	1628
POLE (NUMBER)	1630
*THROW (NUMBER	1632
ANTI-ROTATIONAL MOUNTING MEANS	
ANTI-ROTATIONAL MOUNTING MEANS PROVIDED.	1578

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1572	ENCLOSURE. THE ITEM(S) ENCLOSURE SHALL BE UNSEALED.
1574	ENCLOSURE. THE ITEM(S) ENCLOSURE SHALL BE SEALED.
1576	ENCLOSURE. THE ITEM(S) ENCLOSURE SHALL BE 1576.
	CONTACT ARRANGEMENT. THE CONTACT ARRANGEMENT SHALL BE AS FOLLOWS:
1620	1620 CIRCUIT.
1622	FORM 1622.
1624	SINGLE POLE SINGLE THROW.
1626	SINGLE POLE DOUBLE THROW.
1628	DOUBLE POLE DOUBLE THROW.
1630 1632	1630 POLE, 1632 THROW.
1578	ANTI-ROTATIONAL MOUNTING MEANS. ANTI-ROTATIONAL MOUNTING MEANS SHALL BE PROVIDED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
TERMINATION CONFIGURATION	
NOTE: SEE TERMINATION CONFIGURATION TABLE.	
TYPE OF OPERATION	
KEYWAY ____	1614
CENTER ____	1616
OPPOSITE KEYWAY ____	1618
TERMINAL DESIGNATION	
ILLUSTRATION (NUMBER)	1580
STYLE (NUMBER)	1582

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

TERMINATION CONFIGURATION. THE TERMINATION CONFIGURATION SHALL BE AS SPECIFIED IN THE TERMINATION CONFIGURATION TABLE.

TERMINATION CONFIGURATION TABLE

ITEM	SIZE	LENGTH/THICKNESS	QUANTITY
SCREW ATTACHMENT	3900	3901	3902
WIRE LEAD	3903	3904	3905
SINGLE TURRET	3906	3907	3908
DOUBLE TURRET	3909	3910	3911
J-HOOK	3912	3913	3914
SOLDER EYE	3915	3916	3917
SOLDER LUG	3918	3919	3920
SLIP-ON LUG	3921	3922	3923
CONNECTOR	3924	3925	3926
3927	3928	3929	3930
3931	3932	3933	3934
3935	3936	3937	3938

TYPE OF OPERATION. THE TYPE OF OPERATION SHALL BE AS FOLLOWS:

1614 KEYWAY: 1614.

1616 CENTER: 1616.

1618 OPPOSITE KEYWAY: 1618.

1580 TERMINAL DESIGNATION. THE TERMINAL DESIGNATION(S) SHALL BE IN ACCORDANCE WITH ILLUSTRATION 1580.

1582 STYLE 1582 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
ACTUATING LEVER	
INSULATED FROM ALL CURRENT-CARRYING PARTS.	1584
LUSTERLESS FINISH.	1586
MOUNTING ATTITUDE (SELECT ONE)	
ANY POSITION.	1588
OTHER ____	1590
SOLDERING	
PER MIL-S-6872.	1592
PER REQUIREMENT 5, MIL-STD-454.	1594
FLUX PER MIL-F-14256.	1596
NOT USED FOR MECHANICAL STRENGTH.	1598
OTHER ____	1600
ALTITUDE	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	6790
SEA LEVEL TO (METERS)	6791

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ACTUATING LEVER.
1584	THE ACTUATING LEVER SHALL BE INSULATED FROM ALL CURRENT-CARRYING PARTS.
1586	THE ACTUATING LEVER SHALL HAVE A LUSTERLESS FINISH.
	MOUNTING ATTITUDE.
1588	THE ITEM(S) SHALL BE CAPABLE OF BEING MOUNTED IN ANY POSITION.
1590	THE ITEM(S) SHALL BE CAPABLE OF BEING MOUNTED 1590.
	SOLDERING.
1592	SOLDERING SHALL BE IN ACCORDANCE WITH MIL-S-6872.
1594	SOLDERING SHALL BE IN ACCORDANCE WITH REQUIREMENT 5 OF MIL-STD-454.
1596	FLUX SHALL BE IN ACCORDANCE WITH MIL-F-14256.
1598	SOLDERING SHALL NOT BE USED FOR MECHANICAL STRENGTH.
1600	1600.
6790	OPERATING ALTITUDE. THE OPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6790 FEET.
6791	OPERATING ALTITUDE. THE OPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6791 METERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
ALTITUDE (CONT)	
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	6792
SEA LEVEL TO (METERS)	6793
TEMPERATURE	
MAXIMUM OPERATING (DEGREES CELSIUS)	6794
MAXIMUM NONOPERATING (DEGREES CELSIUS)	6795
MAXIMUM STORAGE (DEGREES CELSIUS)	6796
MAXIMUM SERVICE (DEGREES CELSIUS)	6797
MAXIMUM AMBIENT OPERATING (DEGREES CELSIUS)	6798
MINIMUM OPERATING (DEGREES CELSIUS)	6799
MINIMUM STORAGE (DEGREES CELSIUS)	6801
MINIMUM SERVICE (DEGREES CELSIUS)	6802
MINIMUM AMBIENT OPERATING (DEGREES CELSIUS)	6803
NOMINAL STORAGE (DEGREES CELSIUS)	6804

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6792	NONOPERATING ALTITUDE. THE NONOPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6792 FEET.
6793	NONOPERATING ALTITUDE. THE NONOPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6793 METERS.
6794	MAXIMUM OPERATING TEMPERATURE. THE OPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6794 DEGREES CELSIUS.
6795	MAXIMUM NONOPERATING TEMPERATURE. THE NONOPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6795 DEGREES CELSIUS.
6796	MAXIMUM STORAGE TEMPERATURE. THE STORAGE TEMPERATURE SHALL BE NOT GREATER THAN 6796 DEGREES CELSIUS.
6797	MAXIMUM SERVICE TEMPERATURE. THE SERVICE TEMPERATURE SHALL BE NOT GREATER THAN 6797 DEGREES CELSIUS.
6798	MAXIMUM AMBIENT OPERATING TEMPERATURE. THE AMBIENT OPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6798 DEGREES CELSIUS.
6799	MINIMUM OPERATING TEMPERATURE. THE OPERATING TEMPERATURE SHALL BE NOT LESS THAN 6799 DEGREES CELSIUS.
6801	MINIMUM STORAGE TEMPERATURE. THE STORAGE TEMPERATURE SHALL BE NOT LESS THAN 6801 DEGREES CELSIUS.
6802	MINIMUM SERVICE TEMPERATURE. THE SERVICE TEMPERATURE SHALL BE NOT LESS THAN 6802 DEGREES CELSIUS.
6803	MINIMUM AMBIENT OPERATING TEMPERATURE. THE AMBIENT OPERATING TEMPERATURE SHALL BE NOT LESS THAN 6803 DEGREES CELSIUS.
6804	NOMINAL STORAGE TEMPERATURE. THE STORAGE TEMPERATURE SHALL BE 6804 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
TEMPERATURE (CONT)	
NOMINAL OPERATING (DEGREES CELSIUS)	6805
WEIGHT	
MAXIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024
NOMINAL WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	6996
(POUNDS)	6997
SI (SELECT ONE)	
(GRAMS)	6998
(KILOGRAMS)	6999

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6805	NOMINAL OPERATING TEMPERATURE. THE OPERATING TEMPERATURE SHALL BE 6805 DEGREES CELSIUS.
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7023	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).
7021	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).
6996	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6996 OUNCE(S).
6997	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6997 POUND(S).
6998	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6998 GRAM(S).
6999	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6999 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6272
NO EVIDENCE OF PHYSICAL DAMAGE.	6273
REMAIN WITHIN SPECIFIED TOLERANCE.	6277
NO DISCONTINUITY.	7345
NO LAMP IN TEST CIRCUIT SHALL LIGHT.	1547
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6250
PER MIL-STD-202, METHOD 212.	6251
*TEST CONDITION LETTER (SELECT ONE)	
TEST CONDITION LETTER A.	6226
*LEVEL (SELECT ONE)	
20 G'S.	4863
50 G'S.	4864
100 G'S.	4865

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6272	ACCELERATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6272.
6273	ACCELERATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6277	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
7345	THERE SHALL BE NO ELECTRICAL DISCONTINUITY DURING THE TEST.
1547	NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.
6250	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6250.
6251	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 212 OF MIL-STD-202.
6226	TEST CONDITION LETTER A SHALL APPLY.
4863	THE TEST LEVEL SHALL BE 20 G'S.
4864	THE TEST LEVEL SHALL BE 50 G'S.
4865	THE TEST LEVEL SHALL BE 100 G'S.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATION (CONT)	
TEST CONDITION LETTER (CONT)	
TEST CONDITION LETTER B.	6233
*LEVEL (SELECT ONE)	
10,000 G'S.	4868
20,000 G'S.	4892
DIRECTION (SELECT ONE)	
ONE DIRECTION.	1557
BOTH DIRECTIONS.	1558
TEST CONDITION LETTER C.	6239
*LEVEL (G'S.)	4893
MOUNTING (SELECT ONE)	
MOUNT BY ANY SUITABLE METHOD.	6263
MOUNT BY NORMAL METHOD.	6264
MOUNT PER DOCUMENT (DOC DES)	6265
PERCENT RATED LOAD APPLIED (PERCENT)	6210
MONITOR PER METHOD 310 OF MIL-STD-202	
*TEST CIRCUIT (LETTER)	1548
*TEST CONDITION (LETTER)	1549

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6233	TEST CONDITION LETTER B SHALL APPLY.
4868	THE TEST LEVEL SHALL BE 10,000 G'S.
4892	THE TEST LEVEL SHALL BE 20,000 G'S.
1557	THE SPECIMEN SHALL BE ACCELERATED IN ONE DIRECTION ONLY.
1558	THE SPECIMEN SHALL BE ACCELERATED IN BOTH DIRECTIONS.
6239	TEST CONDITION LETTER C SHALL APPLY.
4893	THE TEST LEVEL SHALL BE 4893 G'S.
6263	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
6264	MOUNTING SHALL BE BY THE NORMAL METHOD.
6265	MOUNTING SHALL BE IN ACCORDANCE WITH 6265.
6210	THE ELECTRICAL LOAD SHALL BE 6210 PERCENT OF THE RATED LOAD.
1548	MONITORING DURING THE TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1548 SHALL APPLY.
1549	TEST CONDITION LETTER 1549 IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACTUATING FORCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2000
AS FOLLOWS:	2002
ACTUATING FORCE (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	2004
(POUNDS)	2006
SI	
(NEWTONS)	2008
NO SHORT CIRCUIT IN SWITCH.	2010
NO EVIDENCE OF PHYSICAL DAMAGE.	2012
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2014
PER DOCUMENT (DOC DES)	2016
TEST FORCE (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	2018
(POUNDS)	2020
SI	
(NEWTONS)	2022

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2000	ACTUATING FORCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2000.
2002	ACTUATING FORCE. THE REQUIREMENTS SHALL BE AS FOLLOWS.
2004	THE ACTUATING FORCE SHALL BE 2004 OUNCE(S).
2006	THE ACTUATING FORCE SHALL BE 2006 POUND(S).
2008	THE ACTUATING FORCE SHALL BE 2008 NEWTON(S).
2010	THERE SHALL BE NO SHORT CIRCUIT IN THE SWITCH(S).
2012	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2014	ACTUATING FORCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2014.
2016	ACTUATING FORCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2016.
2018	THE TEST FORCE SHALL BE 2018 OUNCE(S).
2020	THE TEST FORCE SHALL BE 2020 POUND(S).
2022	THE TEST FORCE SHALL BE 2022 NEWTON(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACTUATING FORCE (CONT)	
PER DOCUMENT (DOC DES) (CONT)	
NUMBER OF ACTUATIONS (QUANTITY)	2024
ACTUATING LEVER TRAVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2030
THE DIFFERENTIAL BETWEEN THE POINT OF MAKE OR BREAK OF THE CONTACTS AND THE SNAP FEEL SHALL BE NOT GREATER THAN ____ DEGREES FOR ANY DIRECTION OF TRAVEL.	2032
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2034
PER MIL-S-9419.	2036
ALTITUDE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2040
AS FOLLOWS:	2042
NO ELECTRICAL OR MECHANICAL DAMAGE.	2044
REMAIN WITHIN SPECIFIED TOLERANCES.	2046

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2024	THERE SHALL BE 2024 ACTUATION(S).
2030	ACTUATING LEVER TRAVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2030.
2032	ACTUATING LEVER TRAVEL. THE DIFFERENTIAL BETWEEN THE POINT OF MAKE OR BREAK OF THE CONTACTS AND THE SNAP FEEL SHALL BE NOT GREATER THAN 2032 DEGREE(S) FOR ANY DIRECTION OF TRAVEL.
2034	ACTUATING LEVER TRAVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2034.
2036	ACTUATING LEVER TRAVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-9419.
2040	ALTITUDE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2040.
2042	ALTITUDE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2044	THERE SHALL BE NO ELECTRICAL OR MECHANICAL DAMAGE.
2046	THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ALTITUDE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2048
PER MIL-S-9419.	2050
NUMBER OF CYCLES (QUANTITY)	2052
TEST CYCLE RATE (CYCLES PER MINUTE)	2054
ALTITUDE (SELECT ONE)	
(FEET)	2056
(METERS)	2058
LOAD ____	2060
CIRCUIT CONFIGURATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2070
THE SWITCH CIRCUIT SHALL CONFORM TO THE SPECIFIED CONFIGURATION.	2072
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2074
PER DOCUMENT (DOC DES)	2076

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2048	ALTITUDE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2048.
2050	ALTITUDE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-9419.
2052	THERE SHALL BE 2052 CYCLE(S).
2054	THE TEST CYCLE RATE SHALL BE 2054 CYCLES PER MINUTE.
2056	THE TEST ALTITUDE SHALL BE 2056 FEET.
2058	THE TEST ALTITUDE SHALL BE 2058 METERS.
2060	THE TEST LOAD SHALL BE 2060.
2070	CIRCUIT CONFIGURATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2070.
2072	CIRCUIT CONFIGURATION. THE SWITCH SHALL CONFORM TO THE SPECIFIED CONFIGURATION.
2074	CIRCUIT CONFIGURATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2074.
2076	CIRCUIT CONFIGURATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2076.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CIRCUIT CONFIGURATION (CONT)	
TEST METHODS (CONT)	
AS FOLLOWS:	2078
SWITCHES SHALL BE TESTED TO DETERMINE CONFORMANCE TO THE SPECIFIED CIRCUITRY USING SUITABLE TEST CIRCUITS.	2080
THE TEST CIRCUIT SHALL NOT EMPLOY CURRENT LEVELS THAT CAN ADVERSELY AFFECT SWITCHING CAPABILITIES.	2082
LOAD ____	2084
COINCIDENCE OF OPERATING AND RELEASE POINTS (SIMULTANEITY)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2090
AS FOLLOWS:	2092
ALL CONTACTS TRANSFER WITHIN (MILLISECONDS)	2094
ALL CLOSED CONTACTS SHALL OPEN BEFORE ANY CONTACTS IN THE NEXT POSITION CLOSE.	2096

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2078	CIRCUIT CONFIGURATION. TESTING SHALL BE PERFORMED AS FOLLOWS:
2080	SWITCHES SHALL BE TESTED TO DETERMINE CONFORMANCE TO THE SPECIFIED CIRCUITRY USING SUITABLE TEST CIRCUITS.
2082	THE TEST CIRCUIT SHALL NOT EMPLOY CURRENT LEVELS THAT CAN ADVERSELY AFFECT SWITCHING CAPABILITIES.
2084	THE LOAD SHALL BE 2084.
2090	COINCIDENCE OF OPERATING AND RELEASE POINTS (SIMULTANEITY). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2090.
2092	COINCIDENCE OF OPERATING AND RELEASE POINTS (SIMULTANEITY). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2094	ALL CONTACTS SHALL TRANSFER WITHIN 2094 MILLISECOND(S).
2096	ALL CLOSED CONTACTS SHALL OPEN BEFORE ANY CONTACTS IN THE NEXT POSITION CLOSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
COINCIDENCE OF OPERATING AND RELEASE POINTS (SIMULTANEITY) (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2098
PER MIL-S-81551.	2100
ACTUATION RATE (SELECT ONE)	
(INCHES PER SECOND)	2102
(DEGREES PER SECOND)	2104
(MILLIMETERS PER SECOND)	2106
CONTACT BOUNCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2110
AS FOLLOWS:	2112
MAXIMUM CONTACT BOUNCE (SELECT ONE)	
(MILLISECONDS)	2114
(MICROSECONDS)	2116

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2098	COINCIDENCE OF OPERATING AND RELEASE POINTS (SIMULTANEITY). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2098.
2100	COINCIDENCE OF OPERATING AND RELEASE POINTS (SIMULTANEITY). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-81551.
2102	THE ACTUATION RATE SHALL BE 2102 INCH(S) PER SECOND.
2104	THE ACTUATION RATE SHALL BE 2104 DEGREE(S) PER SECOND.
2106	THE ACTUATION RATE SHALL BE 2106 MILLIMETER(S) PER SECOND.
2110	CONTACT BOUNCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2110.
2112	CONTACT BOUNCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2114	CONTACT BOUNCE SHALL BE NOT GREATER THAN 2114 MILLISECONDS.
2116	CONTACT BOUNCE SHALL BE NOT GREATER THAN 2116 MICROSECONDS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT BOUNCE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2118
PER MIL-S-8834.	2120
LOAD VOLTAGE (SELECT ONE)	
(VOLTS AC)	2122
(VOLTS DC)	2124
LOAD CURRENT (SELECT ONE)	
(AMPERES)	2126
(MILLIAMPERES)	2128
ACTUATOR ACTUATION RATE (INCHES PER SECOND)	2130
CONTACT RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2140
AS FOLLOWS:	2142
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	2144
(MILLIOHMS)	2146

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2118	CONTACT BOUNCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2118.
2120	CONTACT BOUNCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-8834.
2122	THE LOAD VOLTAGE SHALL BE 2122 VOLTS, AC.
2124	THE LOAD VOLTAGE SHALL BE 2124 VOLTS, DC.
2126	THE LOAD CURRENT SHALL BE 2126 AMPERE(S).
2128	THE LOAD CURRENT SHALL BE 2128 MILLIAMPERES.
2130	THE ACTUATOR ACTUATION RATE SHALL BE 2130 INCH(S) PER SECOND.
2140	CONTACT RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2140.
2142	CONTACT RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2144	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2144 OHMS.
2146	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2146 MILLIOHMS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT RESISTANCE (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM VOLTAGE DROP (SELECT ONE)	
(VOLTS)	2148
(MILLIVOLTS)	2150
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2152
PER MIL-STD-202, METHOD 307.	2154
TEST CURRENT (SELECT ONE)	
MAXIMUM RATED CURRENT	2156
(AMPERES)	2158
(MILLIAMPERES)	2160
MAXIMUM OPEN CIRCUIT TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	2162
(MILLIVOLTS, DC)	2164
(VOLTS, AC)	2166
(MILLIVOLTS, AC)	2168

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2148	THE VOLTAGE DROP SHALL BE NOT GREATER THAN 2148 VOLTS.
2150	THE VOLTAGE DROP SHALL BE NOT GREATER THAN 2150 MILLIVOLTS.
2152	CONTACT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2152.
2154	CONTACT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-202, METHOD 307.
2156	THE TEST CURRENT SHALL BE THE MAXIMUM RATED CURRENT FOR THE CONTACTS.
2158	THE TEST CURRENT SHALL BE 2158 AMPERE(S).
2160	THE TEST CURRENT SHALL BE 2160 MILLIAMPERE(S).
2162	THE OPEN-CIRCUIT TEST VOLTAGE SHALL BE NOT GREATER THAN 2162 VOLTS, DC.
2164	THE OPEN-CIRCUIT TEST VOLTAGE SHALL BE NOT GREATER THAN 2164 MILLIVOLTS, DC.
2166	THE OPEN-CIRCUIT TEST VOLTAGE SHALL BE NOT GREATER THAN 2166 VOLTS, AC.
2168	THE OPEN-CIRCUIT TEST VOLTAGE SHALL BE NOT GREATER THAN 2168 MILLIVOLTS, AC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 307. (CONT)	
NUMBER OF ACTIVATIONS PRIOR TO MEASUREMENT (QUANTITY)	2170
NUMBER OF TEST ACTIVATIONS (QUANTITY)	2172
NUMBER OF MEASUREMENTS PER ACTIVATION (QUANTITY)	2174
MAXIMUM MEASUREMENT ERROR (PERCENT)	2176
METHOD OF CONNECTION ____	2178
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4908
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4906
MAXIMUM LEAKAGE (MILLIAMPERES)	4894
REMAIN WITHIN SPECIFIED TOLERANCE.	4901
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4884

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2170	THERE SHALL BE 2170 ACTIVATION(S) PRIOR TO MEASUREMENT.
2172	THERE SHALL BE 2172 TEST ACTIVATION(S).
2174	THERE SHALL BE 2174 MEASUREMENT(S) PER ACTIVATION.
2176	THE MEASUREMENT ERROR SHALL BE NOT GREATER THAN 2176 PERCENT.
2178	THE METHOD OF CONNECTION SHALL BE 2178.
4908	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4908.
4906	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4894	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4894 MILLIAMPERE(S).
4901	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4884	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4884.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 301.	6300
*ALTITUDE PER METHOD 105 OF MIL-STD-202	
*TEST CONDITION (LETTER)	4886
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4885
(VOLTS, AC)	4849
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	6311
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	6312
BETWEEN MUTUALLY INSULATED PARTS.	6292
BETWEEN ALL INSULATED PARTS AND GROUND.	6293
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	6294
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4859
DURATION OF VOLTAGE APPLICATION (SECONDS)	4891

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6300	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.
4886	ALTITUDE SHALL BE IN ACCORDANCE WITH TEST CONDITION LETTER 4886 OF METHOD 105 OF MIL-STD-202.
4885	TEST VOLTAGE SHALL BE 4885 VOLTS, DC.
4849	TEST VOLTAGE SHALL BE 4849 VOLTS, AC.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
6311	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
6312	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
6292	BETWEEN MUTUALLY INSULATED PARTS.
6293	BETWEEN ALL INSULATED PARTS AND GROUND.
6294	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
4859	SPECIAL PREPARATION SHALL BE IN ACCORDANCE WITH 4859.
4891	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4891 SECOND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
MOUNTING PER DOCUMENT (DOC DES)	6280
REGULATION OF TEST VOLTAGE (PERCENT)	6308
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4900
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4902
(MILLIAMPERES)	6310
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4874
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4856
MAXIMUM LEAKAGE (MILLIAMPERES)	4875
REMAIN WITHIN SPECIFIED TOLERANCE.	4847

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6280	MOUNTING SHALL BE IN ACCORDANCE WITH 6280.
6308	REGULATION OF THE TEST VOLTAGE SHALL BE WITHIN 6308 PERCENT.
4900	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4900 KILOVOLTAMPERE(S).
4902	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4902 AMPERE(S).
6310	THE SURGE CURRENT SHALL BE NOT GREATER THAN 6310 MILLIAMPERE(S).
4874	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.
4856	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4875	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4875 MILLIAMPERE(S).
4847	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4861
PER MIL-STD-202, METHOD 301.	4862
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4854
(VOLTS, AC)	4855
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	4842
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	4848
BETWEEN MUTUALLY INSULATED PARTS.	4844
BETWEEN ALL INSULATED PARTS AND GROUND.	4845
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	4846
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4850
DURATION OF VOLTAGE APPLICATION (SECONDS)	4867
MOUNTING PER DOCUMENT (DOC DES)	5000
REGULATION OF TEST VOLTAGE (PERCENT)	4869

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4861	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861.
4862	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.
4854	TEST VOLTAGE SHALL BE 4854 VOLTS, DC.
4855	TEST VOLTAGE SHALL BE 4855 VOLTS, AC.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
4842	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
4848	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
4844	BETWEEN MUTUALLY INSULATED PARTS.
4845	BETWEEN ALL INSULATED PARTS AND GROUND.
4846	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
4850	SPECIAL PREPARATION OR CONDITIONS SHALL BE IN ACCORDANCE WITH 4850.
4867	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4867 SECOND(S).
5000	MOUNTING SHALL BE IN ACCORDANCE WITH 5000.
4869	REGULATION OF TEST VOLTAGE SHALL BE WITHIN 4869 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRICL WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4870
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4717
(MILLIAMPERES)	4897
METHOD OF VOLTAGE CONNECTION PER DOCUMENT (DOC DES)	6267
ENDURANCE, ELECTRICAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2180
AS FOLLOWS:	2182
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(MILLIOHMS)	2184
(OHMS)	2186
NO EVIDENCE OF MALFUNCTION.	2188
REMAIN WITHIN SPECIFIED TOLERANCES.	2190

Source: https://assist.dla.mil/ - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4870	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4870 KILOVOLTAMPERE(S).
4717	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4717 AMPERE(S).
4897	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4897 MILLIAMPERE(S).
6267	METHOD OF CONNECTION OF TEST VOLTAGE SHALL BE IN ACCORDANCE WITH 6267.
2180	ENDURANCE, ELECTRICAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2180.
2182	ENDURANCE, ELECTRICAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2184	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2184 MILLIOHMS.
2186	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2186 OHM(S).
2188	THERE SHALL BE NO EVIDENCE OF MALFUNCTION.
2190	THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE, ELECTRICAL (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2192
PER DOCUMENT (DOC DES)	2194
OPERATING CYCLES (QUANTITY)	2196
APPLIED VOLTAGE (SELECT ONE)	
(VOLTS, AC)	2198
(VOLTS, DC)	2200
LOAD (PERCENT OF RATED LOAD)	2202
LOAD (TYPE)	2204
TEST CYCLE RATE (CYCLES PER MINUTE)	2206
ENDURANCE, MECHANICAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2210
AS FOLLOWS:	2212
REMAIN WITHIN SPECIFIED TOLERANCES.	2214
NO EVIDENCE OF MALFUNCTION.	2216
NO EVIDENCE OF DAMAGE.	2218
NO DETERIORATION OF TOGGLE SEAL.	2220

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2192	ENDURANCE, ELECTRICAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2192.
2194	ENDURANCE, ELECTRICAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2194.
2196	THERE SHALL BE 2196 OPERATING CYCLES.
2198	THE APPLIED VOLTAGE SHALL BE 2198 VOLTS, AC.
2200	THE APPLIED VOLTAGE SHALL BE 2200 VOLTS, DC.
2202	THE LOAD SHALL BE 2202 PERCENT OF THE RATED LOAD.
2204	THE LOAD TYPE SHALL BE 2204.
2206	THE TEST CYCLE RATE SHALL BE 2206 CYCLES PER MINUTE.
2210	ENDURANCE, MECHANICAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2210.
2212	ENDURANCE, MECHANICAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2214	THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE(S).
2216	THERE SHALL BE NO EVIDENCE OF MALFUNCTION.
2218	THERE SHALL BE NO EVIDENCE OF DAMAGE.
2220	THERE SHALL BE NO DETERIORATION OF THE TOGGLE SEAL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE, MECHANICAL (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2222
PER DOCUMENT (DOC DES)	2224
OPERATING CYCLES (QUANTITY)	2226
TEST CYCLE RATE (CYCLES PER MINUTE)	2228
TEST TEMPERATURE (DEGREES CELSIUS)	2230
CYCLE DEFINITION ____	2232
TEST VOLTAGE (SELECT ONE)	
(VOLTS AC)	2234
(VOLTS DC)	2236
TEST CURRENT (SELECT ONE)	
(AMPERES)	2238
(MILLIAMPERES)	2240
EXPLOSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2250

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2222	ENDURANCE, MECHANICAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2222.
2224	ENDURANCE, MECHANICAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2224.
2226	THERE SHALL BE 2226 OPERATING CYCLES.
2228	THE TEST CYCLE RATE SHALL BE 2228 CYCLES PER MINUTE.
2230	THE TEST TEMPERATURE SHALL BE 2230 DEGREES CELSIUS.
2232	THE CYCLE DEFINITION SHALL BE 2232.
2234	THE TEST VOLTAGE SHALL BE 2234 VOLTS AC.
2236	THE TEST VOLTAGE SHALL BE 2236 VOLTS DC.
2238	THE TEST CURRENT SHALL BE 2238 AMPERE(S).
2240	THE TEST CURRENT SHALL BE 2240 MILLIAMPERE(S).
2250	EXPLOSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2250.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
EXPLOSION (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	2252
REMAIN ELECTRICALLY AND MECHANICALLY OPERATIVE.	2254
NO EXPLOSION WITHIN SWITCH OR CHAMBER.	2256
NO EXPLOSION IN CHAMBER WHETHER OR NOT EXPLOSION OCCURS IN SWITCH.	2258
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2260
PER MIL-STD-202, METHOD 109.	2262
LOAD (PERCENT OF RATED LOAD)	2264
LOAD (TYPE)	2266
CHAMBER TEMPERATURE (DEGREES CELSIUS)	2268
PLUS TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2270
MINUS TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2272
TEST VOLTAGE (SELECT ONE)	
(VOLTS, AC)	2274
FREQUENCY (HERTZ)	2276

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE | STANDARD PARAGRAPH

2252 EXPLOSION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2254 SWITCHES SHALL BE ELECTRICALLY AND MECHANICALLY OPERATIVE AFTER TEST.

2256 THERE SHALL BE NO EXPLOSION WITHIN THE SWITCH OR CHAMBER.

2258 THERE SHALL BE NO EXPLOSION IN THE CHAMBER WHETHER OR NOT EXPLOSION OCCURS IN THE SWITCH.

2260 EXPLOSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2260.

2262 EXPLOSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-202, METHOD 109.

2264 THE LOAD SHALL BE 2264 PERCENT OF THE RATED LOAD.

2266 THE LOAD TYPE SHALL BE 2266.

2268 THE CHAMBER TEMPERATURE SHALL BE 2268 DEGREES CELSIUS.

2270 THE PLUS TEMPERATURE TOLERANCE SHALL BE 2270 DEGREES CELSIUS.

2272 THE MINUS TEMPERATURE TOLERANCE SHALL BE 2272 DEGREES CELSIUS.

2274 THE TEST VOLTAGE SHALL BE 2274 VOLTS AC.

2276 THE AC VOLTAGE FREQUENCY SHALL BE 2276 HERTZ.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
EXPLOSION (CONT)	
TEST VOLTAGE (CONT)	
(VOLTS, DC)	2278
FLAMMABILITY (EXTERNAL FLAME)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2280
AS FOLLOWS:	2282
MAXIMUM FLAME DURATION (SELECT ONE)	
(SECONDS)	2284
(MINUTES)	2286
NO VISIBLE FLAME.	2288
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2290
PER MIL-STD-202, METHOD 111.	2292
AXIS OF FLAME (AXIS)	2294
POINT OF FLAME IMPINGEMENT	
(LOCATION)	2296

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2278	THE TEST VOLTAGE SHALL BE 2278 VOLTS DC.
2280	FLAMMABILITY (EXTERNAL FLAME). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2280.
2282	FLAMMABILITY (EXTERNAL FLAME). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2284	THE TIME FOR BURNING OF VISIBLE FLAME FROM SPECIMEN SHALL BE NOT GREATER THAN 2284 SECONDS.
2286	THE TIME FOR BURNING OF VISIBLE FLAME FROM SPECIMEN SHALL BE NOT GREATER THAN 2286 MINUTES.
2288	THERE SHALL BE NO BURNING OF VISIBLE FLAME FROM THE SPECIMEN.
2290	FLAMMABILITY (EXTERNAL FLAME). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2290.
2292	FLAMMABILITY (EXTERNAL FLAME). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-202, METHOD 111.
2294	THE AXIS OF THE FLAME SHALL BE 2294.
2296	THE POINT OF IMPINGEMENT OF THE APPLIED FLAME SHALL BE 2296.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLAMMABILITY (EXTERNAL FLAME) (CONT)	
PER MIL-STD-202, METHOD 111. (CONT)	
FLAME APPLICATION DURATION (SELECT ONE)	
(SECONDS)	2298
(MINUTES)	2300
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4760
FUNGUS RESISTANT BY CERTIFICATION OR BY TEST.	4761
NO EVIDENCE OF FUNGUS GROWTH WHEN TESTED.	4762
NO ELECTRICAL OR MECHANICAL DAMAGE.	2700
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4754
PER MIL-STD-810, METHOD 508.	4755
TEST PERIOD (DAYS)	4756

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2298	THE DURATION OF THE APPLIED FLAME SHALL BE 2298 SECONDS.
2300	THE DURATION OF THE APPLIED FLAME SHALL BE 2300 MINUTES.
4760	FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.
4761	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED, THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4762	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
2700	THERE SHALL BE NO ELECTRICAL OR MECHANICAL DAMAGE.
4754	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.
4755	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.
4756	TEST PERIOD SHALL BE 4756 DAY(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FUNGUS (CONT)	
TEST METHODS (CONT)	
PER MIL-F-13927.	2702
CLASS (SELECT ONE)	
1.	2704
2.	2706
3.	2708
TEST METHOD (SELECT ONE)	
A.	2710
B.	2712
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1380
AS FOLLOWS:	6359
*MINIMUM INSULATION RESISTANCE (SELECT ONE)	
SINGLE TEST	
(MEGOHMS)	1386
MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	1384
*SECOND TEST (MEGOHMS)	1387

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2702	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-13927.
2704	SPECIMENS SHALL BE CLASSIFIED CLASS 1.
2706	SPECIMENS SHALL BE CLASSIFIED CLASS 2.
2708	SPECIMENS SHALL BE CLASSIFIED CLASS 3.
2710	TEST METHOD A SHALL APPLY.
2712	TEST METHOD B SHALL APPLY.
1380	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.
6359	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1386	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 1386 MEGOHM(S).
1384	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1384 MEGOHM(S) AT THE FIRST TEST TEMPERATURE.
1387	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1387 MEGOHM(S) AT THE SECOND TEST TEMPERATURE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
AS FOLLOWS: (CONT)	
REMAIN WITHIN SPECIFIED TOLERANCE.	1388
NO EVIDENCE OF PHYSICAL DAMAGE.	1407
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1371
PER MIL-STD-202, METHOD 302.	1511
*CONDITION (SELECT ONE)	
TEST CONDITION (LETTER)	1378
TEST VOLTAGE (VOLTS, DC)	1373
ELECTRIFICATION TIME (SECONDS)	1376
MAXIMUM MEASUREMENT ERROR AT REQUIRED VALUE (PERCENT)	1377
POINTS OF MEASUREMENT:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	1497

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1388	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1407	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1371	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.
1511	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 302 OF MIL-STD-202.
1378	TEST CONDITION LETTER 1378 SHALL APPLY.
1373	TEST POTENTIAL SHALL BE 1373 VOLTS, DC.
1376	ELECTRIFICATION DURATION SHALL BE 1376 SECOND(S).
1377	THE MEASUREMENT ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1377 PERCENT.
	POINTS OF INSULATION RESISTANCE MEASUREMENT SHALL BE AS FOLLOWS:
1497	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
POINTS OF MEASUREMENT: (CONT)	
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	1498
BETWEEN MUTUALLY INSULATED PARTS.	1522
BETWEEN INSULATED PARTS AND GROUND.	1523
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	1524
SPECIAL PREPARATIONS OR CONDITIONS PER DOCUMENT (DOC DES)	1520
FIRST TEST TEMPERATURE (DEGREES CELSIUS)	1372
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	1381
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1383
INTERMEDIATE CURRENT SWITCHING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2310
AS FOLLOWS:	2312
REMAIN WITHIN SPECIFIED TOLERANCES.	2314
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	2316
(MILLIOHMS)	2318

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1498	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
1522	BETWEEN MUTUALLY INSULATED PARTS.
1523	BETWEEN ALL INSULATED PARTS AND GROUND.
1524	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
1520	SPECIAL PREPARATIONS OR CONDITIONS SHALL BE IN ACCORDANCE WITH 1520.
1372	FIRST TEST TEMPERATURE SHALL BE 1372 DEGREES CELSIUS.
1381	SECOND TEST TEMPERATURE SHALL BE 1381 DEGREES CELSIUS.
1383	TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1383 DEGREES CELSIUS.
2310	INTERMEDIATE CURRENT SWITCHING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2310.
2312	INTERMEDIATE CURRENT SWITCHING. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2314	THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE(S).
2316	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2316 OHMS.
2318	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2318 MILLIOHMS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INTERMEDIATE CURRENT SWITCHING (CONT)	
AS FOLLOWS (CONT)	
MAXIMUM CONTACT VOLTAGE DROP (SELECT ONE)	
(VOLTS)	2320
(MILLIVOLTS)	2322
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2324
PER MIL-STD-202, METHOD 312.	2326
MINIMUM VOLTAGE ACROSS OPEN CONTACTS (SELECT ONE)	
PERCENT OF APPLIED LOAD VOLTAGE (PERCENT)	2328
(VOLTS, AC)	2330
(VOLTS, DC)	2332
NUMBER OF OPERATIONS (QUANTITY)	2334
CYCLING RATE (CYCLES PER MINUTE)	2336
PLUS CYCLING RATE TOLERANCE (CYCLES PER MINUTE)	2338
MINUS CYCLING RATE TOLERANCE (CYCLES PER MINUTE)	2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2320	THE VOLTAGE DROP ACROSS CLOSED CONTACTS SHALL BE NOT GREATER THAN 2320 VOLT(S).
2322	THE VOLTAGE DROP ACROSS CLOSED CONTACTS SHALL BE NOT GREATER THAN 2322 MILLIVOLT(S).
2324	INTERMEDIATE CURRENT SWITCHING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2324.
2326	INTERMEDIATE CURRENT SWITCHING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 312 OF MIL-STD-202.
2328	THE VOLTAGE ACROSS THE OPEN CONTACTS SHALL BE NOT LESS THAN 2328 PERCENT OF THE APPLIED LOAD VOLTAGE.
2330	THE VOLTAGE ACROSS THE OPEN CONTACTS SHALL BE NOT LESS THAN 2330 VOLTS, AC.
2332	THE VOLTAGE ACROSS THE OPEN CONTACTS SHALL BE NOT LESS THAN 2332 VOLTS, DC.
2334	THERE SHALL BE 2334 OPERATIONS.
2336	THE CYCLING RATE SHALL BE 2336 CYCLES PER MINUTE.
2338	THE PLUS CYCLING RATE TOLERANCE SHALL BE 2338 CYCLE(S) PER MINUTE.
2340	THE MINUS CYCLING RATE TOLERANCE SHALL BE 2340 CYCLE(S) PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INTERMEDIATE CURRENT SWITCHING (CONT)	
PER MIL-STD-202, METHOD 312. (CONT)	
CYCLE 'ON' AMD 'OFF' DURATION	
'ON' (PERCENT OF CYCLE)	2344
'OFF' (PERCENT OF CYCLE)	2346
MONITORING OF CONTACTS FOR STICKING IS NOT APPLICABLE.	2348
FINAL HALF OF CYCLES ARE TO BE TESTED AT ROOM TEMPERATURE.	2350
MAXIMUM AMBIENT TEMPERATURE (DEGREES CELSIUS)	2352
LIFE, LOW LEVEL SWITCHING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2360
AS FOLLOWS:	2362
'MISSES' ALLOWED (QUANTITY)	2364
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	2366
(MILLIOHMS)	2368

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	THE CYCLE 'ON' AND 'OFF' DURATION(S) SHALL BE AS FOLLOWS:
2344	'ON' 2344 PERCENT OF THE CYCLE.
2346	'OFF' 2346 PERCENT OF THE CYCLE.
2348	MONITORING OF CONTACTS FOR STICKING IS NOT APPLICABLE.
2350	THE FINAL HALF OF THE CYCLES SHALL BE TESTED AT ROOM TEMPERATURE.
2352	THE AMBIENT TEMPERATURE SHALL BE NOT GREATER THAN 2352 DEGREES CELSIUS.
2360	LIFE, LOW LEVEL SWITCHING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2360.
2362	LIFE, LOW LEVEL SWITCHING. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2364	THERE SHALL BE 2364 'MISS(S)' ALLOWED.
2366	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2366 OHM(S).
2368	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2368 MILLIOHMS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LIFE, LOW LEVEL SWITCHING (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM CONTACT VOLTAGE DROP (SELECT ONE)	
(VOLTS)	2370
(MILLIVOLTS)	2372
REMAIN WITHIN SPECIFIED TOLERANCES.	2374
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2376
PER MIL-STD-202, METHOD 311.	2378
MAXIMUM LOAD CURRENT (SELECT ONE)	
(AMPERES)	2380
(MILLIAMPERES)	2382
MAXIMUM LOAD VOLTAGE (SELECT ONE)	
(VOLTS, DC)	2384
(MILLIVOLTS, DC)	2386
(VOLTS, AC)	2388
(MILLIVOLTS, AC)	2390

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2370 THE CLOSED CONTACTS VOLTAGE DROP SHALL BE NOT GREATER THAN 2370 VOLT(S).

2372 THE CLOSED CONTACTS VOLTAGE DROP SHALL BE NOT GREATER THAN 2372 MILLIVOLTS.

2374 THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE(S).

2376 LIFE, LOW LEVEL SWITCHING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2376.

2378 LIFE, LOW LEVEL SWITCHING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 311 OF MIL-STD-202.

2380 THE LOAD CURRENT SHALL BE NOT GREATER THAN 2380 AMPERE(S).

2382 THE LOAD CURRENT SHALL BE NOT GREATER THAN 2382 MILLIAMPERES.

2384 THE LOAD VOLTAGE SHALL BE NOT GREATER THAN 2384 VOLT(S), DC.

2386 THE LOAD VOLTAGE SHALL BE NOT GREATER THAN 2386 MILLIVOLTS, DC.

2388 THE LOAD VOLTAGE SHALL BE NOT GREATER THAN 2388 VOLT(S), AC.

2390 THE LOAD VOLTAGE SHALL BE NOT GREATER THAN 2390 MILLIVOLTS, AC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LIFE, LOW LEVEL SWITCHING (CONT)	
PER MIL-STD-202, METHOD 311. (CONT)	
CONTACTS SHALL BE MONITORED FOR STICKING.	2392
TEST CYCLES (QUANTITY)	2394
TEST CYCLE RATE (CYCLES PER MINUTE)	2396
PLUS CYCLE RATE TOLERANCE (CYCLES PER MINUTE)	2398
MINUS CYCLE RATE TOLERANCE (CYCLES PER MINUTE)	2400
MOISTURE RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1400
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	1396
REMAIN WITHIN SPECIFIED TOLERANCE.	1398
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1394
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	1429
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	1404
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	1432

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2392	CONTACTS SHALL BE MONITORED FOR STICKING.
2394	THERE SHALL BE 2394 TEST CYCLES.
2396	THE TEST CYCLE RATE SHALL BE 2396 CYCLES PER MINUTE.
2398	THE PLUS CYCLE RATE TOLERANCE SHALL BE 2398 CYCLES PER MINUTE.
2400	THE MINUS CYCLE RATE TOLERANCE SHALL BE 2400 CYCLES PER MINUTE.
1400	MOISTURE RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1400.
1396	MOISTURE RESISTANCE. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
1398	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1394	THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING OR INSULATION BREAKDOWN, WHEN DIELECTRIC WITHSTANDING VOLTAGE IS APPLIED.
1429	CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1429 MILLIAMPERE(S) AT HIGH HUMIDITY.
1404	CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1404 MILLIAMPERE(S) AFTER DRYING.
1432	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1432 MEGOHM(S) AT HIGH HUMIDITY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE (CONT)	
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE. (CONT)	
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	1406
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1391
PER MIL-STD-202, METHOD 106.	1397
POLARIZING VOLTAGE (VOLTS, DC)	1395
LOADING VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4981
(VOLTS, AC)	4980
PERCENT OF SAMPLE SUBJECTED TO POLARIZING VOLTAGE (PERCENT)	4991
STEP 7A NOT APPLICABLE.	4985
STEP 7B NOT APPLICABLE.	4986
MOUNT PER DOCUMENT (DOC DES)	1449
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	4983
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	4984

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1406	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1406 MEGOHM(S) AFTER DRYING.
1391	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1391.
1397	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 106 OF MIL-STD-202.
1395	POLARIZING VOLTAGE SHALL BE 1395 VOLTS, DC.
4981	LOADING VOLTAGE SHALL BE 4981 VOLTS, DC.
4980	LOADING VOLTAGE SHALL BE 4980 VOLTS, AC.
4991	4991 PERCENT OF THE SAMPLE SHALL BE SUBJECTED TO THE POLARIZING VOLTAGE.
4985	STEP 7A OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
4986	STEP 7B OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
1449	MOUNTING SHALL BE IN ACCORDANCE WITH 1449.
4983	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.
4984	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OVERLOAD	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2410
AS FOLLOWS:	2412
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	2414
(MILLIOHMS)	2416
MAXIMUM VOLTAGE DROP ACROSS CLOSED CONTACTS (SELECT ONE)	
(VOLTS)	2418
(MILLIVOLTS)	2420
PERCENT OF APPLIED LOAD VOLTAGE (PERCENT)	2422
MINIMUM VOLTAGE ACROSS OPEN CONTACTS	
(PERCENT OF APPLIED LOAD VOLTAGE)	2424
REMAIN MECHANICALLY AND ELECTRICALLY OPERATIVE.	2426

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2410	OVERLOAD. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2410.
2412	OVERLOAD. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2414	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2414 OHM(S).
2416	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2416 MILLIOHM(S).
2418	THE VOLTAGE DROP ACROSS CLOSED CONTACTS SHALL BE NOT GREATER THAN 2418 VOLT(S).
2420	THE VOLTAGE DROP ACROSS CLOSED CONTACTS SHALL BE NOT GREATER THAN 2420 MILLIVOLT(S).
2422	THE VOLTAGE DROP ACROSS CLOSED CONTACTS SHALL BE NOT GREATER THAN 2422 PERCENT OF THE APPLIED LOAD VOLTAGE.
2424	THE VOLTAGE ACROSS THE OPEN CONTACTS SHALL BE NOT GREATER THAN 2424 PERCENT OF THE APPLIED LOAD VOLTAGE.
2426	THE ITEM(S) SHALL REMAIN MECHANICALLY AND ELECTRICALLY OPERATIVE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OVERLOAD (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2428
PER DOCUMENT (DOC DES)	2430
NUMBER OF OPERATIONS (QUANTITY)	2432
OVERLOAD CURRENT (SELECT ONE)	
(AMPERES)	2434
(PERCENT OF RATED LOAD)	2436
CYCLING RATE (CYCLES PER MINUTE)	2438
PLUS CYCLING RATE TOLERANCE (CYCLES PER MINUTE)	2440
MINUS CYCLING RATE TOLERANCE (CYCLES PER MINUTE)	2442
DUTY CYCLE	
'ON' (PERCENT)	2444
'OFF' (PERCENT)	2446

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2428	OVERLOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2428.
2430	OVERLOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2430.
2432	THERE SHALL BE 2432 OPERATIONS.
2434	THE OVERLOAD CURRENT SHALL BE 2434 AMPERE(S).
2436	THE OVERLOAD CURRENT SHALL BE 2436 PERCENT OF THE RATED LOAD.
2438	THE CYCLING RATE SHALL BE 2438 CYCLES PER MINUTE.
2440	THE PLUS CYCLING RATE TOLERANCE SHALL BE 2440 CYCLES PER MINUTE.
2442	THE MINUS CYCLING RATE TOLERANCE SHALL BE 2442 CYCLES PER MINUTE.
	THE DUTY CYCLE SHALL BE AS FOLLOWS:
2444	'ON' 2444 PERCENT OF CYCLE.
2446	'OFF' 2446 PERCENT OF CYCLE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OZONE RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2450
AS FOLLOWS:	2452
NO CRACKING OF MATERIALS.	2454
REMAIN WITHIN SPECIFIED TOLERANCES.	2456
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2458
PER DOCUMENT (DOC DES)	2460
DURATION SUBJECTED TO OZONE CONCENTRATION (HOURS)	2462
OZONE CONCENTRATION (PERCENT BY VOLUME)	2464
RESISTANCE TO SOLDERING HEAT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4700
NO EVIDENCE OF PHYSICAL DAMAGE.	4701
REMAIN WITHIN SPECIFIED TOLERANCE.	4718

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2450 OZONE RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2450.

2452 OZONE RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2454 THERE SHALL BE NO CRACKING OF MATERIALS.

2456 THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE(S).

2458 OZONE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2458.

2460 OZONE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2460.

2462 THE ITEM(S) SHALL BE SUBJECTED TO THE OZONE CONCENTRATION FOR 2462 HOUR(S).

2464 THE OZONE CONCENTRATION SHALL BE 2464 PERCENT BY VOLUME.

4700 RESISTANCE TO SOLDERING HEAT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4700.

4701 RESISTANCE TO SOLDERING HEAT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

4718 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO SOLDERING HEAT (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4689
PER MIL-STD-202, METHOD 210.	4698
*TEST CONDITION (LETTER)	4691
NUMBER OF TERMINATIONS TESTED (QUANTITY)	4694
DEPTH OF IMMERSION IN SOLDER (SELECT ONE)	
(INCHES)	4692
(MILLIMETERS)	4669
IMMERSION IN FLUX PERMITTED.	4671
SPECIAL PREPARATIONS PERMITTED.	4989
COOLING TIME (MINUTES)	4695
SALT SPRAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4878
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE.	4782

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4689	RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4689.
4698	RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 210 OF MIL-STD-202.
4691	TEST CONDITION LETTER 4691 SHALL APPLY.
4694	4964 TERMINATION(S) PER UNIT SHALL BE TESTED.
4692	DEPTH OF IMMERSION IN SOLDER SHALL BE 4692 INCH(S).
4669	DEPTH OF IMMERSION IN SOLDER SHALL BE 4669 MILLIMETER(S).
4671	IMMERSION OF TERMINATION IN FLUX SHALL BE PERMITTED.
4989	SPECIAL PREPARATION SHALL BE PERMITTED.
4695	COOLING TIME SHALL BE 4695 MINUTES PRIOR TO FINAL EXAMINATION AND MEASUREMENTS.
4878	SALT SPRAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4878.
4782	SALT SPRAY. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT SPRAY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4770
PER MIL-STD-202, METHOD 101.	4771
*TEST CONDITION (LETTER)	4772
MOUNTING (SELECT ONE)	
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4773
MOUNTING SHALL BE BY NORMAL METHOD.	4765
MOUNTING SHALL BE BY ANY SUITABLE METHOD.	4766
SAND AND DUST	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4958
NO EVIDENCE OF DUST PENETRATION.	4959
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4952
PER MIL-STD-202, METHOD 110.	4960

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4770	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4770.
4771	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 101 OF MIL-STD-202.
4772	TEST CONDITION LETTER 4772 SHALL APPLY.
4773	MOUNTING SHALL BE IN ACCORDANCE WITH 4773.
4765	MOUNTING SHALL BE BY THE NORMAL METHOD.
4766	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4958	SAND AND DUST. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4958.
4959	SAND AND DUST. THERE SHALL BE NO EVIDENCE OF DUST PENETRATION.
4952	SAND AND DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4952.
4960	SAND AND DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 110 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SAND AND DUST (CONT)	
PER MIL-STD-202, METHOD 110. (CONT)	
TEST SPECIMEN(S) SHALL BE OPERATED DURING TEST STEP(S) (NUMBER)	4872
*DURATION OF OPERATION (HOURS)	6299
SPECIMEN ORIENTATION SHALL BE CHANGED DURING TEST.	1539
SECOND 6-HOUR TEST REQUIREED IMMEDIATELY FOLLOWING TEMPERATURE STABILIZATION IN STEP 2.	4956
SEAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4745
AS FOLLOWS:	6370
SPECIFIED TEST METHOD SENSITIVITY.	4746
NO BUBBLES INDICATIVE OF LEAKAGE.	4748
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4734
PER MIL-STD-202, METHOD 112.	4732

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4872	ITEM(S) SHALL BE OPERATED DURING STEP(S) 4872.
6299	DURATION OF OPERATION SHALL BE 6299 HOUR(S).
1539	ORIENTATION SHALL BE CHANGED DURING THE TEST.
4956	THE SECOND 6-HOUR TEST SHALL BE PERFORMED IMMEDIATELY AFTER REACHING TEMPERATURE STABILIZATION IN STEP 2.
4745	SEAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4745.
6370	SEAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
4746	THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE SPECIFIED TEST METHOD SENSITIVITY.
4748	THERE SHALL BE NO BUBBLES INDICATIVE OF LEAKAGE.
4734	SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4734.
4732	SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 112 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
PER MIL-STD-202, METHOD 112. (CONT)	
*TEST CONDITION LETTER	
LETTER A.	4737
LIQUID FOR BATH (NAME)	4738
MINIMUM BATH TEMPERATURE (DEGREES CELSIUS)	4739
LETTER B.	6320
LIQUID FOR BATH (NAME)	6321
MINIMUM BATH TEMPERATURE (DEGREES CELSIUS)	6322
LETTER C.	6323
*LEAK RATE SENSITIVITY (ATM CC/SEC)	4741
*TEST PROCEDURE (SELECT ONE)	
TEST PROCEDURE I.	4740
VACUUM PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	4742
(KILOPASCALS)	4736

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4737	TEST CONDITION LETTER A SHALL APPLY.
4738	LIQUID FOR BUBBLE TEST BATH SHALL BE 4738.
4739	TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 4739 DEGREES CELSIUS.
6320	TEST CONDITION LETTER B SHALL APPLY.
6321	LIQUID FOR BUBBLE TEST BATH SHALL BE 6321.
6322	TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 6322 DEGREES CELSIUS.
6323	TEST CONDITION LETTER C SHALL APPLY.
4741	LEAK SENSITIVITY RATE SHALL BE 4741 ATM CC/SEC.
4740	PROCEDURE NUMBER I SHALL APPLY.
4742	VACUUM PRESSURE SHALL BE 4742 POUNDS PER SQUARE INCH.
4736	VACUUM PRESSURE SHALL BE 4736 KILOPASCAL(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
*TEST PROCEDURE (SELECT ONE) (CONT)	
TEST PROCEDURE II.	6324
BACKFILL PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	6325
(KILOPASCALS)	6326
NUMBER OF PRESSURE CYCLES (QUANTITY)	4749
TEST PROCEDURE III.	6328
GROSS LEAK TEST CONDITION (LETTER)	4750
TEST PROCEDURE IV.	6329
CHAMBER PRESSURE (SELECT ONE)	
(TORR)	4751
(KILOPASCALS)	4735
DURATION OF REDUCED PRESSURE (MINUTES)	4752
GROSS LEAK TEST CONDITION (LETTER)	6330
LETTER D.	6331
ANY SUITABLE MOUNTING METHOD.	4743
LETTER E.	6332
ANY SUITABLE MOUNTING METHOD.	6333

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6324	PROCEDURE NUMBER II SHALL APPLY.
6325	BACKFILL PRESSURE SHALL BE 6325 POUNDS PER SQUARE INCH.
6326	BACKFILL PRESSURE SHALL BE 6326 KILOPASCAL(S).
4749	THERE SHALL BE 4749 PRESSURE CYCLE(S).
6328	PROCEDURE NUMBER III SHALL APPLY.
4750	GROSS LEAK TEST CONDITION LETTER 4750 SHALL APPLY.
6329	PROCEDURE NUMBER IV SHALL APPLY.
4751	CHAMBER PRESSURE SHALL BE 4751 TORR.
4735	CHAMBER PRESSURE SHALL BE 4735 KILOPASCAL(S).
4752	DURATION AT LOW PRESSURE SHALL BE 4752 MINUTE(S).
6330	GROSS LEAK TEST CONDITION LETTER 6330 SHALL APPLY.
6331	TEST CONDITION LETTER D SHALL APPLY.
4743	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
6332	TEST CONDITION LETTER E SHALL APPLY.
6333	MOUNTING SHALL BE BY ANY SUITABLE METHOD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, HIGH IMPACT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1494
NO EVIDENCE OF PHYSICAL DAMAGE.	1495
REMAIN WITHIN SPECIFIED TOLERANCE.	1464
NO DISCONTINUITY DURING TEST.	1451
NO LAMP IN TEST CIRCUIT SHALL LIGHT.	1550
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1486
PER MIL-STD-202, METHOD 207.	1482
*MOUNTING FIXTURE (SELECT ONE)	
FIGURE NUMBER FROM METHOD 207 OF MIL-STD-202 (NUMBER)	1488
ANY SUITABLE MOUNTING FIXTURE.	1478
MOUNTING FIXTURE PER DOCUMENT (DOC DES)	1468

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1494	SHOCK, HIGH IMPACT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1494.
1495	SHOCK, HIGH IMPACT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1464	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1451	THERE SHALL BE NO DISCONTINUITY DURING THE TEST.
1550	NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.
1486	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1486.
1482	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 207 OF MIL-STD-202.
1488	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH FIGURE 1488 OF METHOD 207 OF MIL-STD-202.
1478	THE MOUNTING FIXTURE SHALL BE ANY SUITABLE MOUNTING FIXTURE.
1468	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH 1468.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, HGIH IMPACT (CONT)	
PER MIL-STD-202, METHOD 207. (CONT)	
MONITOR CONTACT CHATTER PER METHOD 310 OF MIL-STD-202.	
*TEST CIRCUIT (LETTER)	1487
*TEST CONDITION (LETTER)	1479
PERCENT RATED LOAD APPLIED (PERCENT)	6203
SHOCK, SPECIFIED PULSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1508
NO EVIDENCE OF PHYSICAL DAMAGE.	1509
NO DISCONTINUITY DURING TEST.	1471
REMAIN WITHIN SPECIFIED TOLERANCE.	4703
NO LAMP IN TEST CIRCUIT SHALL LIGHT.	1551

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1487	MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1487 SHALL APPLY.
1479	TEST CONDITION LETTER 1479 OF METHOD 310 OF MIL-STD-202 SHALL APPLY.
6203	THE ELECTRICAL LOAD SHALL BE 6203 PERCENT OF THE RATED LOAD.
1508	SHOCK, SPECIFIED PULSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1508.
1509	SHOCK, SPECIFIED PULSE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1471	THERE SHALL BE NO DISCONTINUITY DURING THE TEST.
4703	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1551	NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, SPECIFIED PULSE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1502
PER MIL-STD-202, METHOD 213.	1500
*TEST CONDITION (LETTER)	1504
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	4686
NORMAL MOUNTING METHOD.	4685
MOUNT PER DOCUMENT (DOC DES)	4684
MONITOR CONTACT CHATTER PER METHOD 310 OF MIL-STD-202.	
*TEST CIRCUIT (LETTER)	1503
*TEST CONDITION (LETTER)	1499
PERCENT RATED LOAD APPLIED (PERCENT)	6204

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1502	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1502.
1500	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 213 OF MIL-STD-202.
1504	TEST CONDITION LETTER 1504 SHALL APPLY.
4686	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4685	MOUNTING SHALL BE BY THE NORMAL METHOD.
4684	MOUNTING SHALL BE IN ACCORDANCE WITH 4684.
1503	MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT 1503 SHALL APPLY.
1499	TEST CONDITION LETTER 1499 OF METHOD 310 OF MIL-STD-202 SHALL APPLY.
6204	THE ELECTRICAL LOAD SHALL BE 6204 PERCENT OF THE RATED LOAD.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHORT CIRCUIT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2470
AS FOLLOWS:	2472
THERE SHALL BE NO WELDING OR STICKING OF CONTACTS.	2474
REMAIN MECHANICALLY AND ELECTRICALLY OPERATIVE AFTER TEST.	2476
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2478
PER DOCUMENT (DOC DES)	2480
MAXIMUM APPLIED TEST CURRENT (AMPERES)	2482
OPEN CIRCUIT TEST VOLTAGE (VOLTS)	2484
FREQUENCY (HERTZ)	2486
LOAD (TYPE)	2488
TEST CYCLES (QUANTITY)	2490
METHOD (SELECT ONE)	
I.	2492
II.	2494

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2470	SHORT CIRCUIT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2470.
2472	SHORT CIRCUIT. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2474	THERE SHALL BE NO WELDING OR STICKING OF CONTACTS.
2476	THE SWITCH SHALL BE MECHANICALLY AND ELECTRICALLY OPERATIVE AFTER TESTING.
2478	SHORT CIRCUIT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2478.
2480	SHORT CIRCUIT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2480.
2482	THE APPLIED TEST CURRENT SHALL BE NOT GREATER THAN 2482 AMPERES.
2484	THE OPEN CIRCUIT TEST VOLTAGE SHALL BE 2484 VOLTS.
2486	THE FREQUENCY SHALL BE 2486 HERTZ.
2488	THE LOAD TYPE SHALL BE 2488.
2490	THE NUMBER OF TEST CYCLES SHALL BE 2490.
2492	METHOD I SHALL APPLY.
2494	METHOD II SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SOLDERABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4674
NO EVIDENCE OF PHYSICAL DAMAGE.	4675
MEET EVALUATION CRITERIA SPECIFIED IN METHOD 208 OF MIL-STD-202.	4672
REMAIN WITHIN SPECIFIED TOLERANCE.	4677
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4662
PER MIL-STD-202, METHOD 208.	4683
NUMBER OF TERMINALS TO BE TESTED (QUANTITY)	4666
DEPTH OF IMMERSION (SELECT ONE)	
(INCHES)	4667
(MILLIMETERS)	4663
DISTANCE WRAP WIRE APPLIED FROM BODY (SELECT ONE)	
(INCHES)	4664
(MILLIMETERS)	4665
SPECIAL PREPARATIONS PERMITTED.	6205

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4674	SOLDERABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4674.
4675	SOLDERABILITY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4672	THE RESULTS OF THE SOLDERABILITY TEST SHALL BE IN ACCORDANCE WITH THE ACCEPTANCE CRITERIA OF METHOD 208 OF MIL-STD-202.
4677	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4662	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4662.
4683	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 208 OF MIL-STD-202.
4666	4666 TERMINATION(S) PER UNIT SHALL BE TESTED.
4667	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4667 INCH(S).
4663	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4663 MILLIMETER(S).
4664	THE WRAP WIRE SHALL BE 4664 INCH(S) FROM THE BODY.
4665	THE WRAP WIRE SHALL BE 4665 MILLIMETER(S) FROM THE BODY.
6205	SPECIAL PREPARATION SHALL BE PERMITTED.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STOPS STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2500
AS FOLLOWS:	2502
NO EVIDENCE OF PHYSICAL DAMAGE.	2504
NO SLIPPAGE OF MOVING PARTS.	2506
NO EVIDENCE OF MALFUNCTION.	2508
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2510
PER DOCUMENT (DOC DES)	2512
TEST TORQUE (SELECT ONE)	
(POUND-INCHES)	2514
(NEWTON METERS)	2516
DURATION OF TEST TORQUE (SELECT ONE)	
(SECONDS)	2518
(MINUTES)	2520
TEST FORCE (SELECT ONE)	
(POUNDS)	2522
(NEWTONS)	2524

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2500	STOPS STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2500.
2502	STOPS STRENGTH. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2504	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2506	THERE SHALL BE NO SLIPPAGE OF MOVING PARTS.
2508	THERE SHALL BE NO EVIDENCE OF MALFUNCTION.
2510	STOPS STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2510.
2512	STOPS STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2512.
2514	THE TEST TORQUE SHALL BE 2514 POUND-INCH(S).
2516	THE TEST TORQUE SHALL BE 2516 NEWTON METER(S).
2518	THE DURATION OF THE TEST TORQUE SHALL BE 2518 SECOND(S).
2520	THE DURATION OF THE TEST TORQUE SHALL BE 2520 MINUTE(S).
2522	THE TEST FORCE SHALL BE 2522 POUND(S).
2524	THE TEST FORCE SHALL BE 2524 NEWTON(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STOPS STRENGTH (CONT)	
PER DOCUMENT (DOC DES) (CONT)	
DURATION OF TEST FORCE	
(SECONDS)	2526
(MINUTES)	2528
STRENGTH OF ACTUATING MEANS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2530
AS FOLLOWS:	2532
NO ELECTRICAL OR MECHANICAL DAMAGE.	2534
MINIMUM STRENGTH (SELECT ONE)	
(POUNDS)	2536
(NEWTONS)	2538
REMAIN ELECTRICALLY AND MECHANICALLY OPERATIVE.	2540
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2542

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2526	THE DURATION OF THE TEST FORCE SHALL BE 2526 SECOND(S).
2528	THE DURATION OF THE TEST FORCE SHALL BE 2528 MINUTE(S).
2530	STRENGTH OF ACTUATING MEANS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2530.
2532	STRENGTH OF ACTUATING MEANS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2534	THERE SHALL BE NO ELECTRICAL OR MECHANICAL DAMAGE.
2536	THE ACTUATING MEANS SHALL BE CAPABLE OF WITHSTANDING A FORCE NOT LESS THAN 2536 POUND(S).
2538	THE ACTUATING MEANS SHALL BE CAPABLE OF WITHSTANDING A FORCE NOT LESS THAN 2538 NEWTON(S).
2540	THE ITEM(S) SHALL REMAIN ELECTRICALLY AND MECHANICALLY OPERATIVE.
2542	STRENGTH OF ACTUATING MEANS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2542.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STRENGTH OF ACTUATING MEANS (CONT)	
TEST METHODS (CONT)	
PER DOCUMENT (DOC DES)	2544
TEST LOAD (SELECT ONE)	
(POUNDS)	2546
(NEWTONS)	2548
TEST LOAD DURATION (SELECT ONE)	
(SECONDS)	2550
(MINUTES)	2552
STRENGTH OF MOUNTING MEANS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2560
AS FOLLOWS:	2562
NO EVIDENCE OF DAMAGE.	2564
NO LOOSENING AND TWISTING OF BUSHING.	2566
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2568
PER DOCUMENT (DOC DES)	2570

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2544	STRENGTH OF ACTUATING MEANS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2544.
2546	THE TEST LOAD SHALL BE 2546 POUND(S).
2548	THE TEST LOAD SHALL BE 2548 NEWTON(S).
2550	THE TEST LOAD DURATION SHALL BE 2550 SECOND(S).
2552	THE TEST LOAD DURATION SHALL BE 2552 MINUTE(S).
2560	STRENGTH OF MOUNTING MEANS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2560.
2562	STRENGTH OF MOUNTING MEANS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2564	THERE SHALL BE NO EVIDENCE OF DAMAGE.
2566	THERE SHALL BE NO LOOSENING AND TWISTING OF THE BUSHING.
2568	STRENGTH OF MOUNTING MEANS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2568.
2570	STRENGTH OF MOUNTING MEANS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2570.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STRENGTH OF MOUNTING MEANS (CONT)	
PER DOCUMENT (CONT)	
TEST TORQUE (SELECT ONE)	
(POUND-INCHES)	2572
(NEWTON METERS)	2574
TEMPERATURE, HIGH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6228
NO EVIDENCE OF PHYSICAL DAMAGE.	6229
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6217
PER DOCUMENT (DOC DES)	2802
*PROCEDURE (ROMAN NUMERAL)	6219
STORAGE TEMPERATURE (DEGREES CELSIUS)	6220
STORAGE DURATION (HOURS)	6221
HIGHEST OPERATING TEMPERATURE (DEGREES CELSIUS)	6222
OPERATION TIME (SELECT ONE)	
(MINUTES)	6224
(HOURS)	6225

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2572	THE TEST TORQUE SHALL BE 2572 POUND-INCH(S).
2574	THE TEST TORQUE SHALL BE 2574 NEWTON METER(S).
6228	TEMPERATURE, HIGH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6228.
6229	TEMPERATURE, HIGH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6217	TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6217.
2802	TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2802.
6219	PROCEDURE NUMBER 6219 SHALL APPLY.
6220	STORAGE TEMPERATURE SHALL BE 6220 DEGREES CELSIUS.
6221	STORAGE DURATION SHALL BE 6221 HOUR(S).
6222	HIGHEST OPERATING TEMPERATURE SHALL BE 6222 DEGREES CELSIUS.
6224	OPERATING TIME SHALL BE 6224 MINUTE(S).
6225	OPERATING TIME SHALL BE 6225 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, LOW	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6318
NO EVIDENCE OF PHYSICAL DAMAGE.	6319
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6231
PER DOCUMENT (DOC DES)	2800
STORAGE TEMPERATURE (DEGREES CELSIUS)	6234
STORAGE DURATION (HOURS)	6235
LOWEST OPERATING TEMPERATURE (DEGREES CELSIUS)	6236
CHAMBER AIR VELOCITY (SELECT ONE)	
(FEET PER SECOND)	6237
(METERS PER SECOND)	6238
OPERATION TIME (SELECT ONE)	
(MINUTES)	6315
(HOURS)	6316

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6318	TEMPERATURE, LOW. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6318.
6319	TEMPERATURE, LOW. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6231	TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6231.
2800	TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2800.
6234	STORAGE TEMPERATURE SHALL BE 6234 DEGREES CELSIUS.
6235	STORAGE DURATION SHALL BE 6235 HOUR(S).
6236	LOWEST OPERATING TEMPERATURE SHALL BE 6236 DEGREES CELSIUS.
6237	CHAMBER AIR VELOCITY SHALL BE 6237 FEET PER SECOND.
6238	CHAMBER AIR VELOCITY SHALL BE 6238 METERS PER SECOND.
6315	OPERATING TIME SHALL BE 6315 MINUTE(S).
6316	OPERATING TIME SHALL BE 6316 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE RISE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2580
MAXIMUM TEMPERATURE RISE (DEGREES CELSIUS)	2582
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2584
PER DOCUMENT (DOC DES)	2586
TEST CURRENT (SELECT ONE)	
(PERCENT OF RATED CURRENT)	2588
(AMPERES)	2590
TEST CURRENT APPLICATION DURATION (SELECT ONE)	
(MINUTES)	2592
(HOURS)	2594
TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	2596
(VOLTS, AC)	2598
NUMBER OF READINGS (QUANTITY)	2600
READING INTERVAL (MINUTES)	2602

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2580	TEMPERATURE RISE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2580.
2582	TEMPERATURE RISE. THE TEMPERATURE RISE SHALL BE NOT GREATER THAN 2582 DEGREES CELSIUS.
2584	TEMPERATURE RISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2584.
2586	TEMPERATURE RISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2586.
2588	THE TEST CURRENT SHALL BE 2588 PERCENT OF THE RATED CURRENT.
2590	THE TEST CURRENT SHALL BE 2590 AMPERE(S).
2592	THE TEST CURRENT APPLICATION DURATION SHALL BE 2592 MINUTE(S).
2594	THE TEST CURRENT APPLICATION DURATION SHALL BE 2594 HOUR(S).
2596	THE TEST VOLTAGE SHALL BE 2596 VOLTS, DC.
2598	THE TEST VOLTAGE SHALL BE 2598 VOLTS, AC.
2600	THERE SHALL BE 2600 READING(S).
2602	THE READING INTERVAL SHALL BE 2602 MINUTE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINAL SEALING (FLUID IMMERSION)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2610
AS FOLLOWS:	2612
REMAIN OPERABLE.	2614
REMAIN WITHIN DIELECTRIC WITHSTANDING VOLTAGE TOLERANCES.	2616
NO CRACKING OR LOOSENING OF BONDS AND SEAMS.	2618
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2620
PER MIL-S-83731.	2622
NUMBER OF IMMERSION CYCLES (QUANTITY)	2624
FLUID IMMERSION DURATION (SELECT ONE)	
(SECONDS)	2626
(MINUTES)	2628
FLUIDS ____	2630

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2610	TERMINAL SEALING (FLUID IMMERSION). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2610.
2612	TERMINAL SEALING (FLUID IMMERSION). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2614	THE ITEM(S) SHALL REMAIN OPERABLE.
2616	THE ITEM(S) SHALL REMAIN WITHIN DIELECTRIC WITHSTANDING VOLTAGE TOLERANCES.
2618	THERE SHALL BE NO CRACKING OR LOOSENING OR BONDS AND SEAMS.
2620	TERMINAL SEALING (FLUID IMMERSION). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2620.
2622	TERMINAL SEALING (FLUID IMMERSION). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-83731.
2624	THERE SHALL BE 2624 IMMERSION CYCLES.
2626	THE FLUID IMMERSION DURATION SHALL BE 2626 SECONDS.
2628	THE FLUID IMMERSION DURATION SHALL BE 2628 MINUTE(S).
2630	THE IMMERSION FLUIDS SHALL BE 2630.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINAL STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1418
NO EVIDENCE OF PHYSICAL DAMAGE.	1433
REMAIN WITHIN SPECIFIED TOLERANCE.	6296
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1410
PER MIL-STD-202, METHOD 211.	1375
*TEST CONDITIONS	
TEST CONDITION A, APPLIED FORCE (SELECT ONE)	
(POUNDS)	1411
(NEWTONS)	1419
TEST CONDITION B, BENDS (NUMBER)	1412

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1418	TERMINAL STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1418.
1433	TERMINAL STRENGTH. THERE SHALL BE NO EVEIDENCE OF PHYSICAL DAMAGE.
6296	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1410	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1410.
1375	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 211 OF MIL-STD-202.
1411	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1411 POUND(S).
1419	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1419 NEWTON(S).
1412	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION B. THERE SHALL BE 1412 BEND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINAL STRENGTH (CONT)	
TEST CONDITIONS (CONT)	
TEST CONDITION C, LOAD (SELECT ONE)	
(POUNDS)	1413
(KILOGRAMS)	1420
TEST CONDITION D.	1414
TEST CONDITION E, TORQUE (SELECT ONE)	
(POUND-INCHES)	1416
(NEWTON METERS)	1421
THERMAL SHOCK (TEMPERATURE CYCLING)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4722
NO EVIDENCE OF PHYSICAL DAMAGE.	4723
REMAIN WITHIN SPECIFIED TOLERANCE.	4726
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4713
PER MIL-STD-202, METHOD 107.	4714
*TEST CONDITION (LETTER)	4715

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1413	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1413 POUND(S).
1420	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1420 KILOGRAM(S).
1414	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION D.
1416	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1416 POUND-INCH(S).
1421	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1421 NEWTON METER(S).
4722	THERMAL SHOCK (TEMPERATURE CYCLING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4722.
4723	THERMAL SHOCK (TEMPERATURE CYCLING). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4726	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4713	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4713.
4714	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 107 OF MIL-STD-202.
4715	TEST CONDITION LETTER 4715 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THERMAL SHOCK (TEMPERATURE CYCLING) (CONT)	
PER MIL-STD-202, METHOD 107. (CONT)	
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4719
TOGGLE ICE (ICING)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2640
AS FOLLOWS:	2642
NO MECHANICAL DAMAGE.	2644
NO ELECTRICAL FAILURE.	2646
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2648
PER DOCUMENT (DOC DES)	2650
TEST TEMPERATURE (DEGREES CELSIUS)	2652
TEST TEMPERATURE DURATION (SELECT ONE)	
(MINUTES)	2654
(HOURS)	2656

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
4719	MOUNTING SHALL BE IN ACCORDANCE WITH 4719.
2640	TOGGLE ICE (ICING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2640.
2642	TOGGLE ICE (ICING). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2644	THERE SHALL BE NO MECHANICAL DAMAGE.
2646	THERE SHALL BE NO ELECTRICAL FAILURE.
2648	TOGGLE ICE (ICING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2648.
2650	TOGGLE ICE (ICING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2650.
2652	THE TEST TEMPERATURE SHALL BE 2652 DEGREES CELSIUS.
2654	THE TEST TEMPERATURE DURATION SHALL BE 2654 MINUTE(S).
2656	THE TEST TEMPERATURE DURATION SHALL BE 2656 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARCTERISTIC NAME	CHAR CODE
TOGGLE SEAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2660
NO LEAKAGE OF WATER INTO SWITCH THROUGH TOGGLE SEAL.	2662
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2666
PER MIL-S-83731.	2668
IMMERSION DURATION (SELECT ONE)	
(MINUTES)	2670
(SECONDS)	2672
NUMBER OF OPERATIONS (QUANTITY)	2674
VIBRATION, HIGH FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1455
NO EVIDENCE OF PHYSICAL DAMAGE.	1456
NO DISCONTINUITY DURING TEST.	1473
REMAIN WITHIN SPECIFIED TOLERANCE.	1469
NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.	1552

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2660	TOGGLE SEAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2660.
2662	TOGGLE SEAL. THERE SHALL BE NO LEAKAGE OF WATER INTO THE SWITCH THROUGH THE TOGGLE SEAL.
2666	TOGGLE SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2666.
2668	TOGGLE SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-83731.
2670	THE IMMERSION DURATION SHALL BE 2670 MINUTE(S).
2672	THE IMMERSION DURATION SHALL BE 2672 SECOND(S).
2674	THERE SHALL BE 2674 OPERATIONS.
1455	VIBRATION, HIGH FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1455.
1456	VIBRATION, HIGH FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1473	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1469	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1552	NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current revision before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, HIGH FREQUENCY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1446
PER MIL-STD-202, METHOD 204.	1447
*TEST CONDITION (LETTER)	1448
PERCENT RATED LOAD APPLIED (PERCENT)	6200
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4709
NORMAL MOUNTING METHOD.	4708
MOUNT PER DOCUMENT (DOC DES)	4707
METHOD OF DETERMINING MECHANICAL RESONANCE (SELECT ONE)	
VISUALLY BY MEANS OF A STROBOTAC.	1533
ELECTRICAL OUTPUT INDICATORS.	1534
MONITOR CONTACT CHATTER IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202.	
*TEST CIRCUIT (LETTER)	1442
*TEST CONDITION (LETTER)	1444

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1446	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1446.
1447	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 204 OF MIL-STD-202.
1448	TEST CONDITION LETTER 1448 SHALL APPLY.
6200	THE LOAD SHALL BE 6200 PERCENT OF THE RATED LOAD.
4709	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4708	MOUNTING SHALL BE BY THE NORMAL METHOD.
4707	MOUNTING SHALL BE IN ACCORDANCE WITH 4707.
1533	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE VISUALLY BY MEANS OF A STROBOTAC.
1534	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE BY ELECTRICAL OUTPUT INDICATORS.
1442	MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1442 SHALL APPLY.
1444	TEST CONDITION LETTER 1444 OR METHOD 310 OF MIL-STD-202 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2022610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1475
NO EVIDENCE OF PHYSICAL DAMAGE.	1476
REMAIN WITHIN SPECIFIED TOLERANCE.	1480
NO DISCONTINUITY DURING TEST.	1490
NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.	1553
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1466
PER MIL-STD-202, METHOD 201.	1467
DURATION OF VIBRATION PER AXIS (HOURS)	1470
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4731
NORMAL MOUNTING METHOD.	4730
MOUNT PER DOCUMENT (DOC DES)	4729
DIRECTION OF MOTION	
PARALLEL TO LONGITUDINAL AXIS.	1535

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1475	VIBRATION, LOW FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1475.
1476	VIBRATION, LOW FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1480	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1490	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1553	NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.
1466	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1466.
1467	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 201 OF MIL-STD-202.
1470	DURATION OF TEST SHALL BE 1470 HOUR(S) PER AXIS.
4731	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4730	MOUNTING SHALL BE BY THE NORMAL METHOD.
4729	MOUNTING SHALL BE IN ACCORDANCE WITH 4729.
1535	THE DIRECTION OF MOTION SHALL BE PARALLEL TO THE LONGITUDINAL AXIS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY (CONT)	
DIRECTION OF MOTION (CONT)	
PERPENDICULAR TO LONGITUDINAL AXIS.	1536
ON THE CENTERLINE OF MOST SENSITIVE AXIS.	4979
90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.	4978
THREE MUTUALLY PERPENDICULAR DIRECTIONS.	1537
MONITOR CONTACT CHATTER IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202.	
*TEST CIRCUIT (LETTER)	1491
*TEST CONDITION (LETTER)	1492
PERCENT RATED LOAD APPLIED (PERCENT)	6201

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1536	THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE LONGITUDINAL AXIS.
4979	THE DIRECTION OF MOTION SHALL BE ON THE CENTERLINE OF THE MOST SENSITIVE AXIS.
4978	THE DIRECTION OF MOTION SHALL BE 90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.
1537	THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUALLY PERPENDICULAR DIRECTIONS.
1491	MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1491 SHALL APPLY.
1492	TEST CONDITION LETTER 1492 OF METHOD 310 OF MIL-STD-202 SHALL APPLY.
6201	THE LOAD SHALL BE 6201 PERCENT OF THE RATED LOAD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1435
NO EVIDENCE OF PHYSICAL DAMAGE.	1436
REMAIN WITHIN SPECIFIED TOLERANCE.	1538
DISCONTINUITY DURING TEST (SELECT ONE)	
NO DISCONTINUITY.	1374
MAXIMUM (MILLISECONDS)	1545
MAXIMUM (MICROSECONDS)	1546
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1426
PER MIL-STD-202, METHOD 214.	1427
*TEST CONDITION (ROMAN NUMERAL AND LETTER)	1428
*DURATION OF APPLICATION (SELECT ONE)	
(MINUTES)	1438
(HOURS)	1431
MONITORING INSTRUMENTATION OF EXCITATION (SELECT ONE)	
ANY SUITABLE SYSTEM.	1452

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1435	VIBRATION, RANDOM. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1435.
1436	VIBRATION, RANDOM. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1538	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1374	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1545	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1545 MILLISECOND(S).
1546	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1546 MICROSECOND(S).
1426	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1426.
1427	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 214 OF MIL-STD-202.
1428	TEST CONDITION NUMBER AND LETTER 1428 SHALL APPLY.
1438	THE DURATION OF THE TEST SHALL BE 1438 MINUTE(S).
1431	THE DURATION OF THE TEST SHALL BE 1431 HOUR(S).
1452	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE ANY SUITABLE INSTRUMENTATION SYSTEM.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
MONITORING INSTRUMENTATION OF EXCITATION (CONT)	
CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.	1453
CALIBRATED OSCILLOSCOPE.	1459
NUMBER OF VIBRATION MONITORING TEST POINTS (QUANTITY)	1430
LOCATION OF MONITORING POINTS (SELECT ONE)	
ANY SUITABLE LOCATION.	1439
AS CLOSE AS PRACTICAL TO TEST SPECIMEN.	1462
MONITOR CONTACT CHATTER IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202.	
*TEST CIRCUIT (LETTER)	1402
*TEST CONDITION (LETTER)	1382
PERCENT OF RATED LOAD APPLIED (PERCENT)	4678
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4977
NORMAL MOUNTING METHOD.	4976
MOUNT PER DOCUMENT (DOC DES)	4975

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1453	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED AC TO DC CONVERTER SYSTEM.
1459	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED OSCILLOSCOPE.
1430	THERE SHALL BE 1430 VIBRATION MONITORING POINT(S).
1439	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE ANY SUITABLE LOCATION.
1462	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE AS CLOSE AS PRACTICAL TO THE TEST SPECIMEN(S).
1402	MONITORING DURING THE TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1402 SHALL APPLY.
1382	TEST CONDITION LETTER 1382 IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202 SHALL APPLY.
4678	THE LOAD SHALL BE 4678 PERCENT OF THE RATED LOAD.
4977	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4976	MOUNTING SHALL BE BY THE NORMAL METHOD.
4975	MOUNTING SHALL BE IN ACCORDANCE WITH 4975.

Source: https://assist.dla.mil -- Downloaded: 2026-04-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WATERPROOFNESS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2680
NO EVIDENCE OF WATER LEAKAGE.	2682
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2684
PER MIL-E-13856.	2686
TYPE (SELECT ONE)	
I.	2688
II.	2690
CLASS (SELECT ONE)	
1.	2692
2.	2694
3.	2696
4.	2698
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2680	WATERPROOFNESS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2680.
2682	WATERPROOFNESS. THERE SHALL BE NO EVIDENCE OF WATER LEAKAGE.
2684	WATERPROOFNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2684.
2686	WATERPROOFNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-E-13856.
2688	THE SWITCH SHALL BE CLASSIFIED AS TYPE I.
2690	THE SWITCH SHALL BE CLASSIFIED AS TYPE II.
2692	THE SWITCH SHALL BE CLASSIFIED AS CLASS 1.
2694	THE SWITCH SHALL BE CLASSIFIED AS CLASS 2.
2696	THE SWITCH SHALL BE CLASSIFIED AS CLASS 3.
2698	THE SWITCH SHALL BE CLASSIFIED AS CLASS 4.

MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A ____	7001
B ____	7002
C ____	7003
D ____	7004
E ____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629
ADDITIONAL PART MARKING	
A ____	6991
B ____	6992
C ____	6993
D ____	6994
E ____	6995

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DEFINITION OF HERMETIC SEALING	
NOTE: AUTOMATIC WHEN CODE 1570 IS USED TO REQUIRE HERMETIC SEALING.	
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

DEFINITION OF HERMETIC SEALING. FOR THE PURPOSE OF THIS DOCUMENT, A HERMETICALLY-SEALED ITEM IS ONE IN WHICH THE ELEMENT IS CONTAINED WITHIN A SEALED ENCLOSURE OF CERAMIC, GLASS OR METAL, OR A COMBINATION THEREOF, WHERE SEALING IS ACCOMPLISHED BY MATERIAL FUSION, WELDING, BLAZING OR SOLDERING.

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI


(Project EDS-A269)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.


APPENDIX A

ILLUSTRATIONS


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

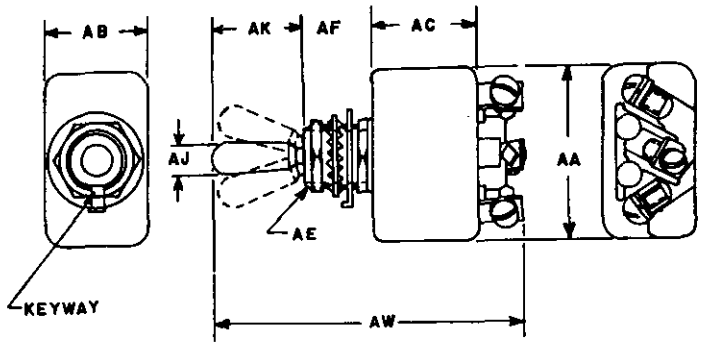

015-01-1

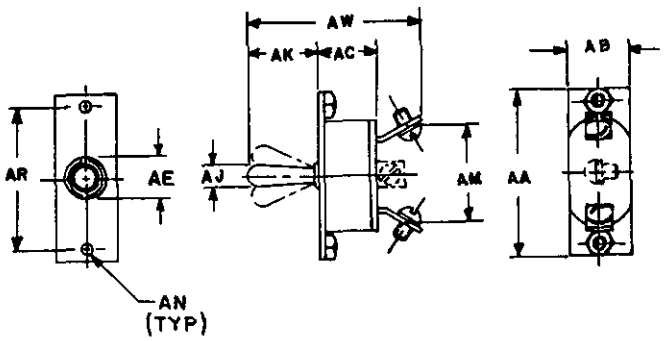


015-01-2

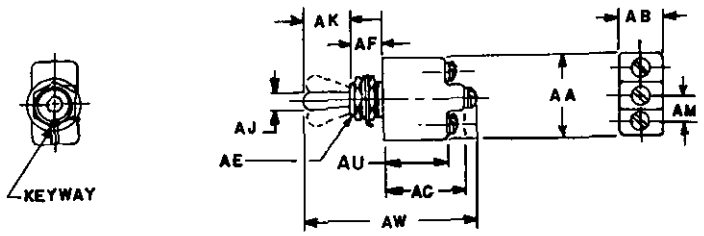


015-01-3


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

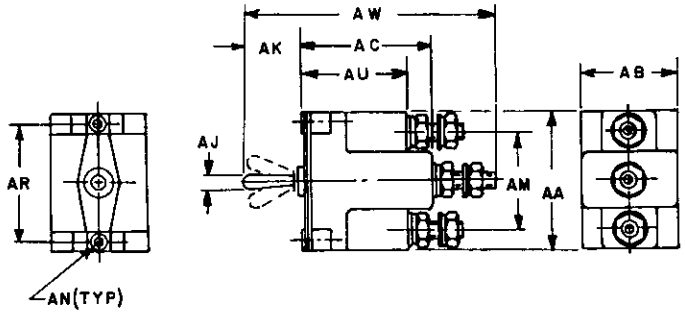

015-01-4

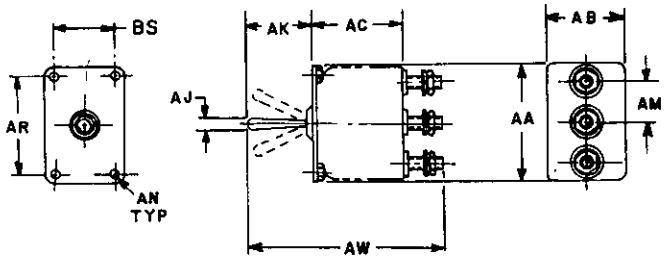


015-01-5

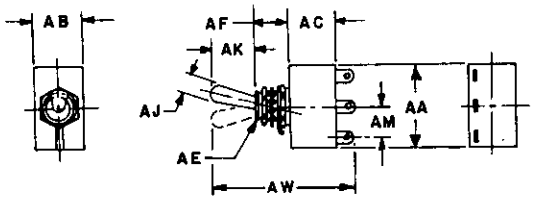



015-01-6


Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

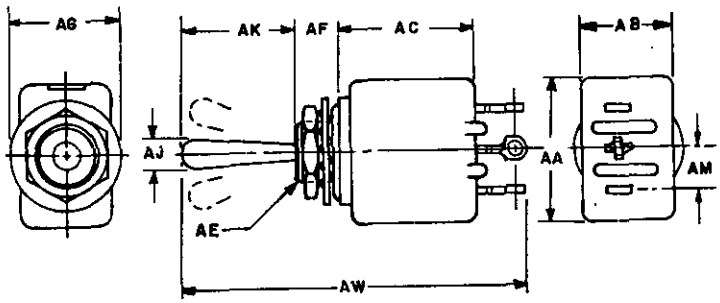


015-01-7






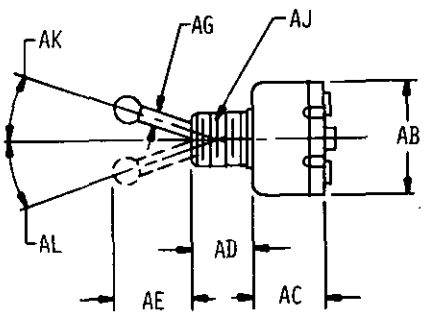

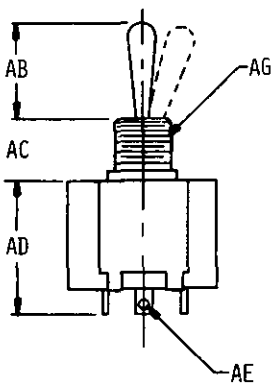


015-01-8

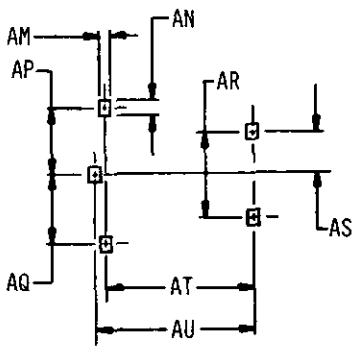


TERMINAL DIMENSIONS

015-01-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

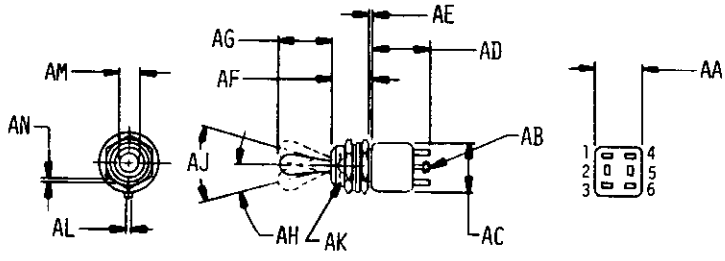


015-01-10

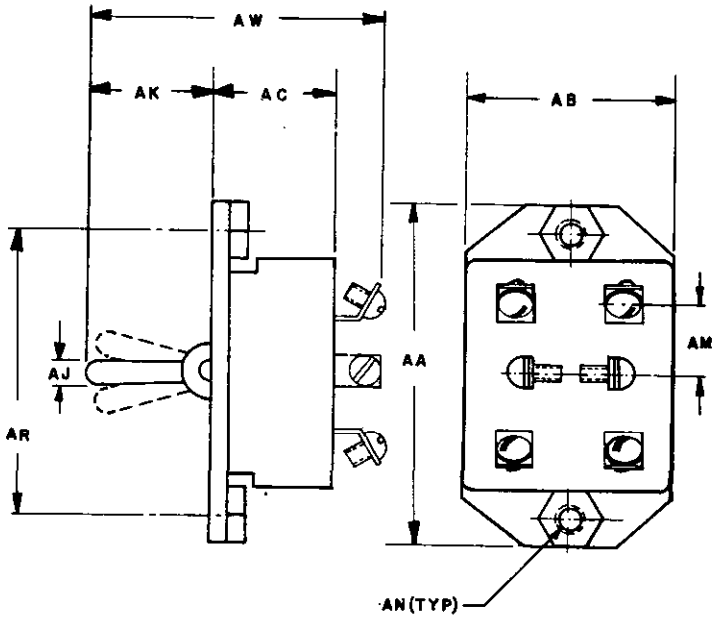


015-02-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

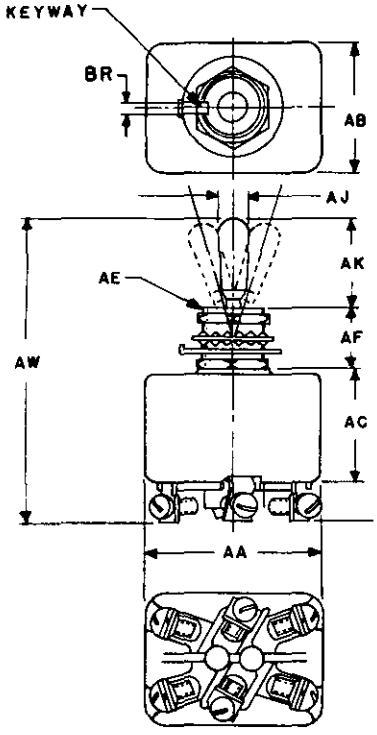


015-02-2

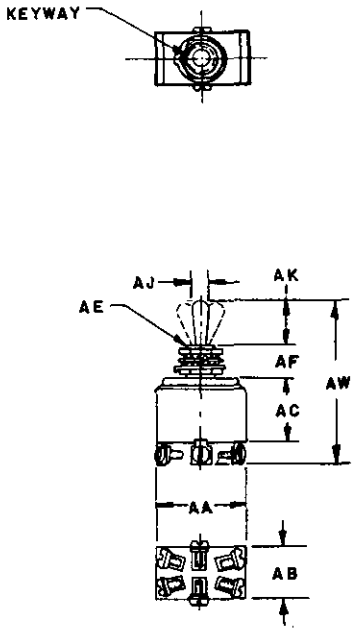


015-02-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

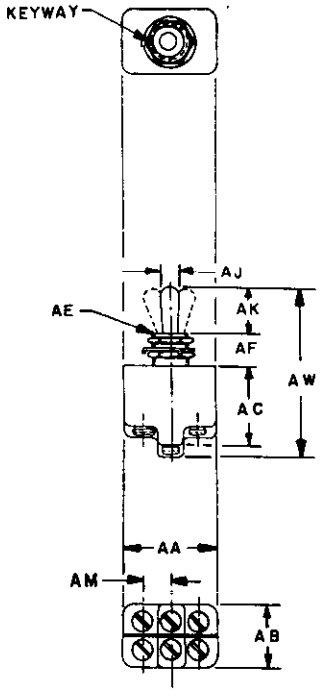


015-02-4

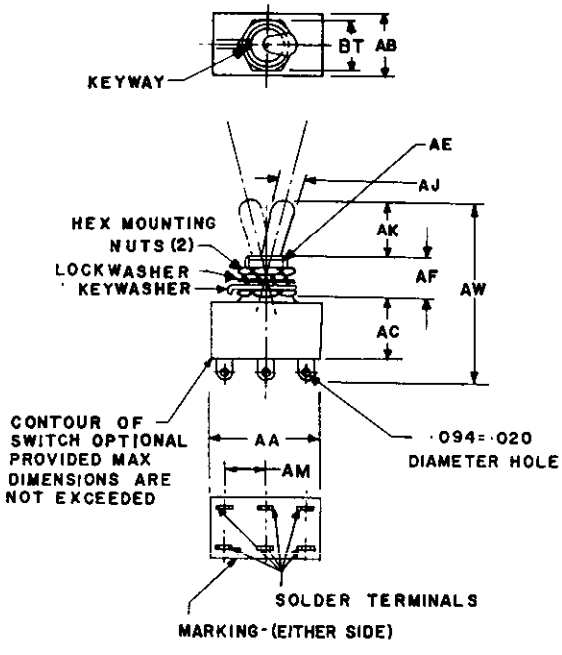


015-02-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

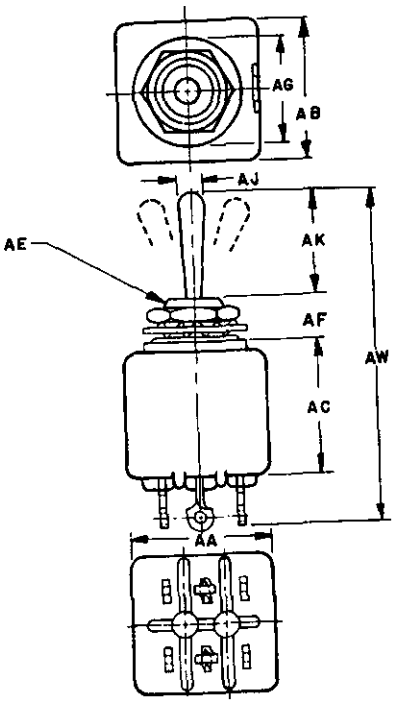


015-02-6

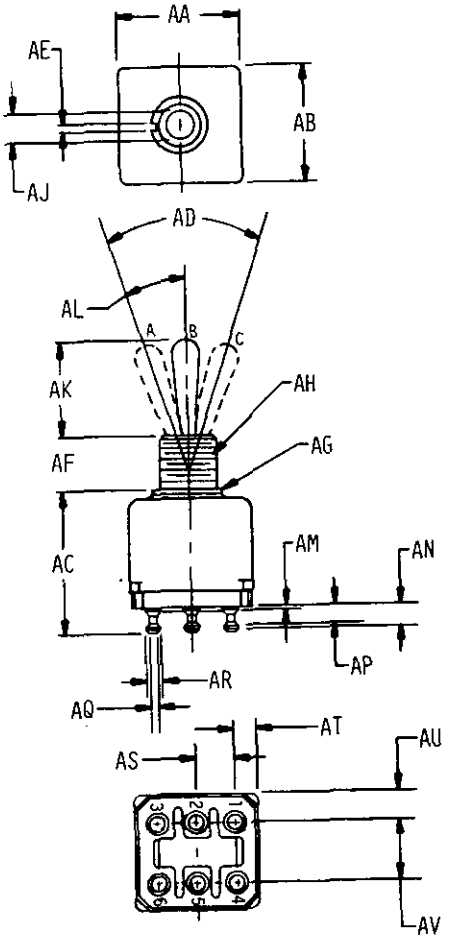


015-02-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

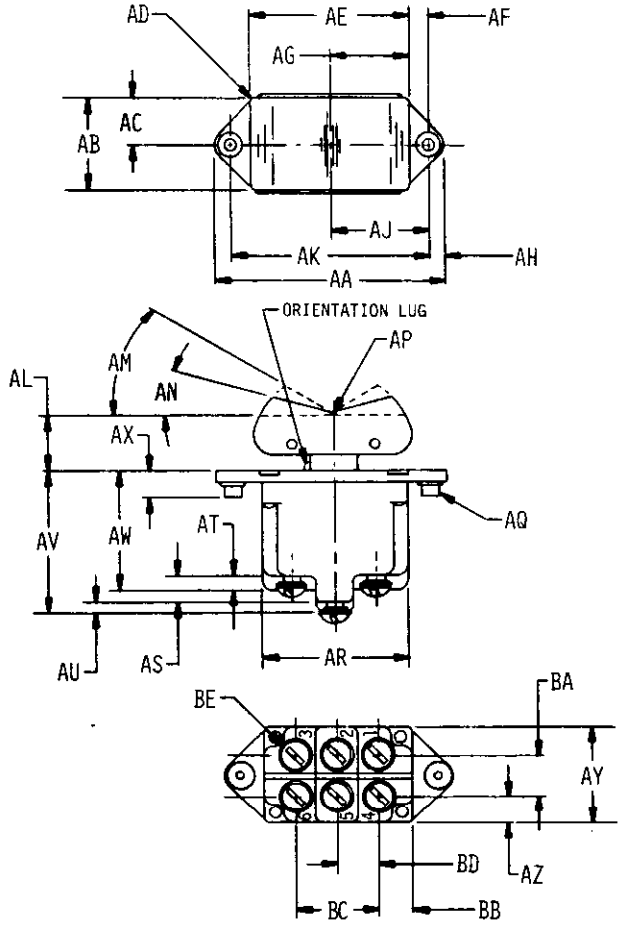


015-02-8


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

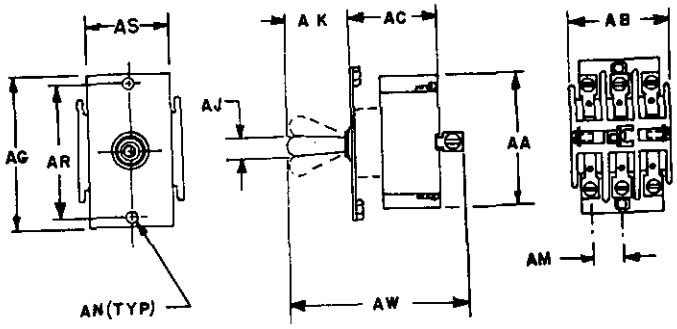

015-03-1

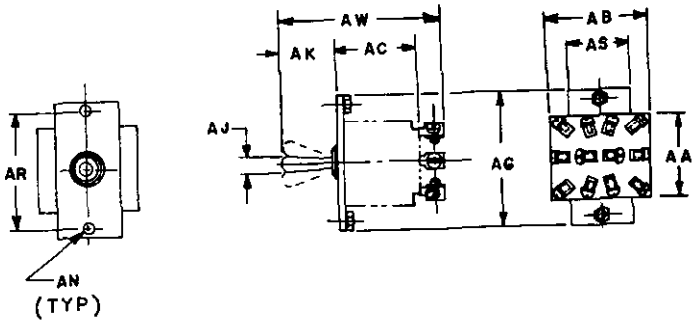


015-04-1

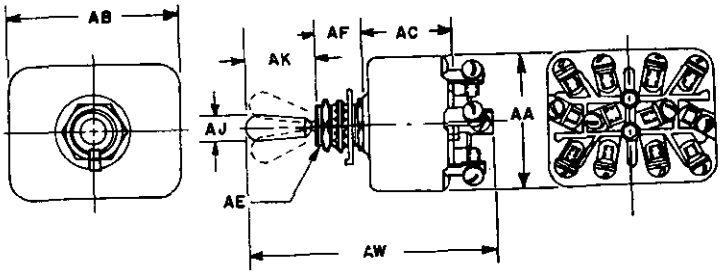


015-04-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

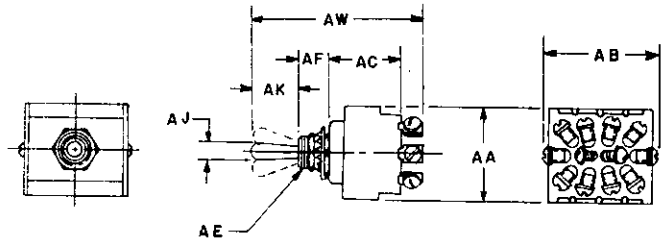


015-04-3

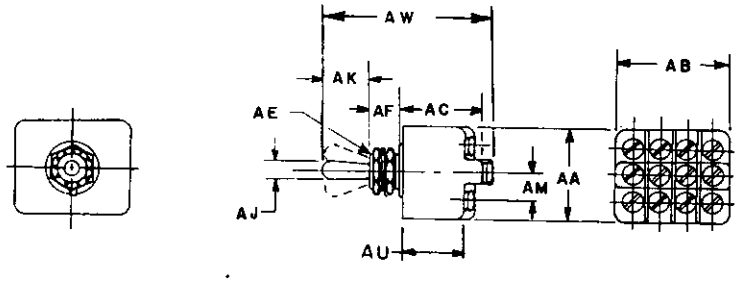


015-04-4


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

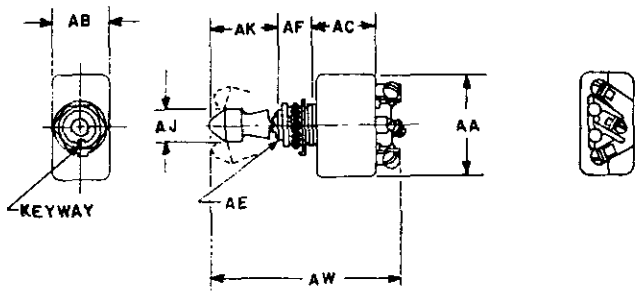

015-05-1

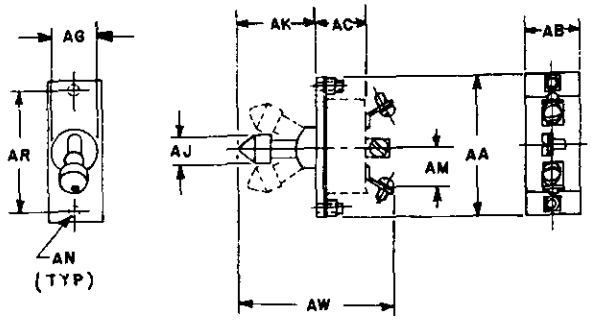


015-05-2

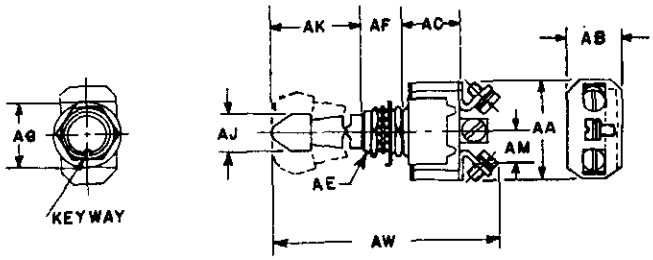


015-05-3


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

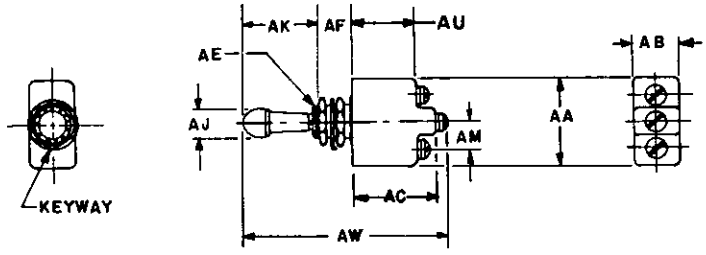

015-05-4

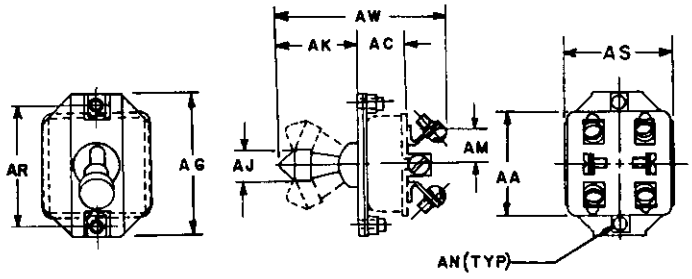


015-06-1

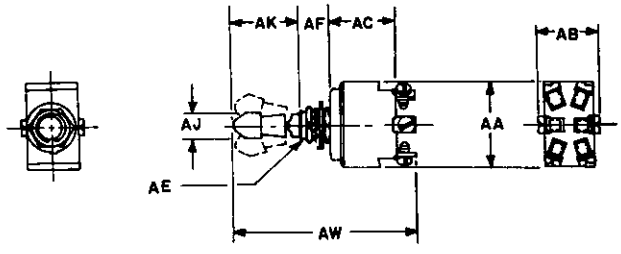


015-06-2


Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

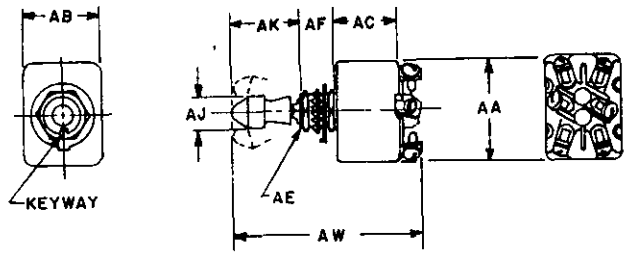

Ø15-Ø6-3

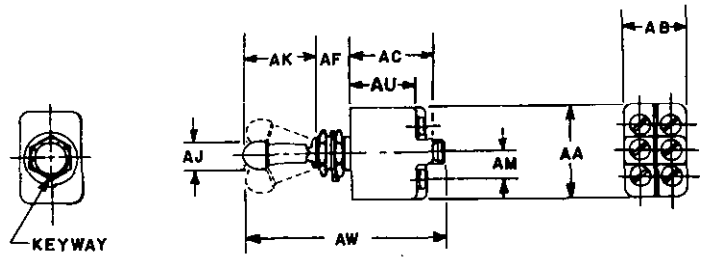


Ø15-Ø6-4

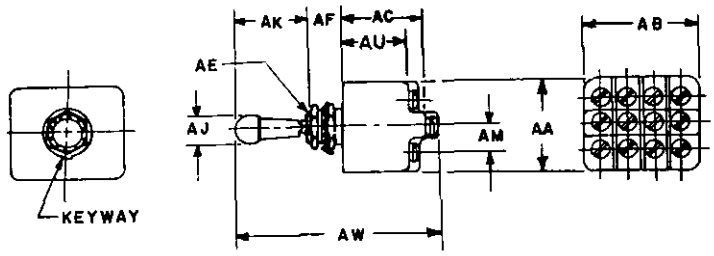


Ø15-Ø7-1


Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

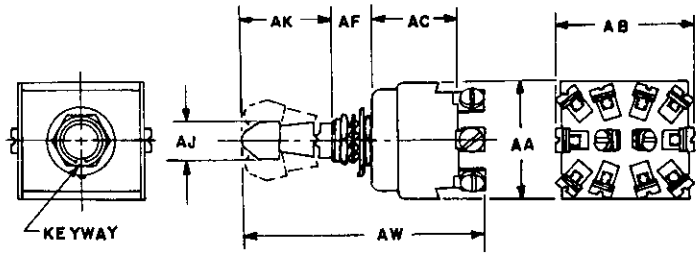

015-07-2

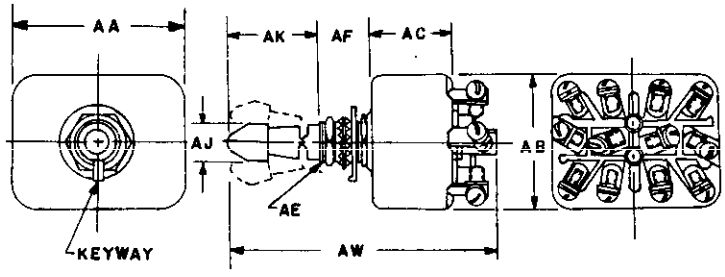


015-07-3

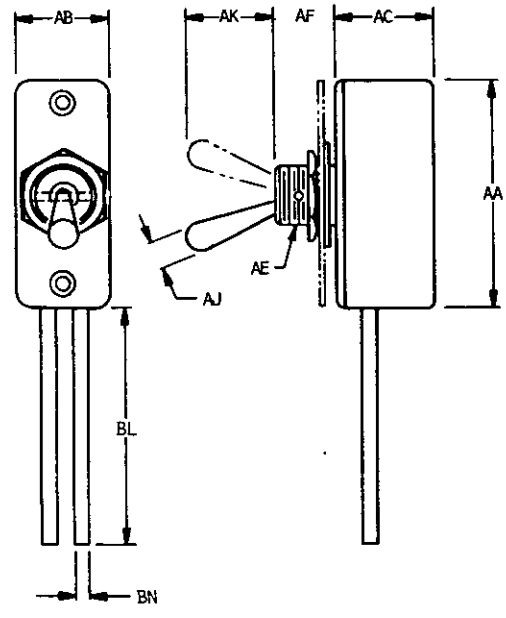


015-08-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

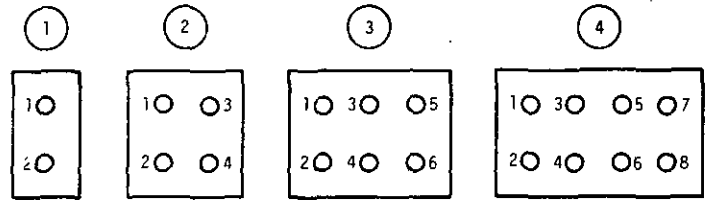

SINGLE THROW

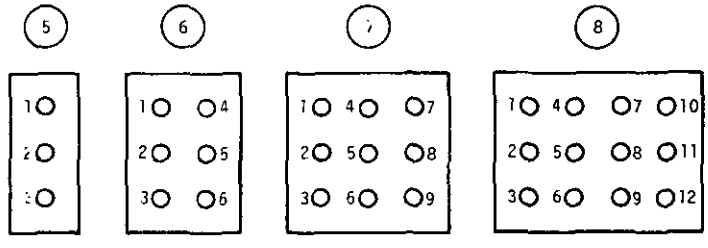


DOUBLE THROW

NOTE: *REAR VIEW OF SWITCH SHOWN WITH KEYWAY, LOCKING TAB, OR LOCATING FLAT IN DOWN POSITION AND TOGGLE MOTION IN VERTICAL POSITION.*

015-09-1


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

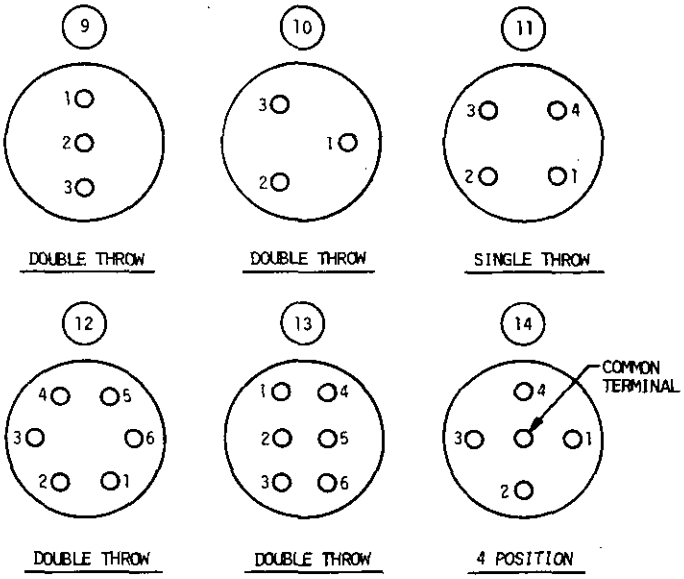


NOTE: REAR VIEW OF SWITCH SHOWN WITH KEYWAY, LOCKING TAB, OR LOCATING FLAT IN DOWN POSITION AND TOGGLE MOTION IN VERTICAL POSITION EXCEPT STYLE (14) WHICH HAS BOTH HORIZONTAL AND VERTICAL MOTION.

Ø15-Ø9-2

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

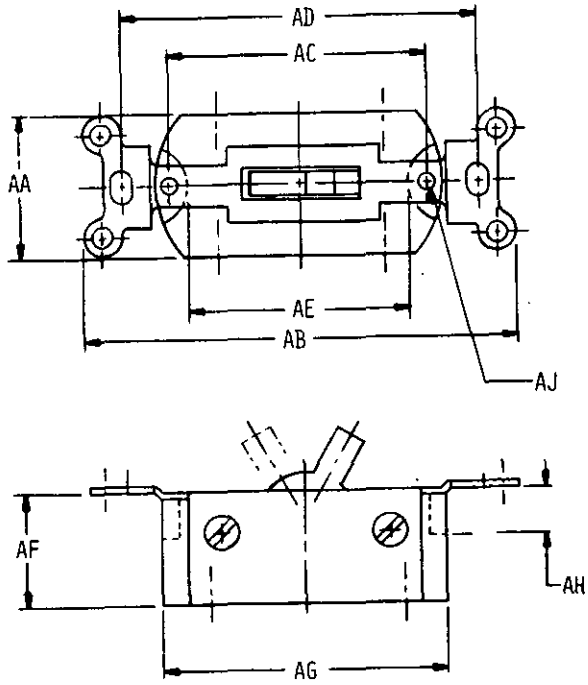

015-10-1

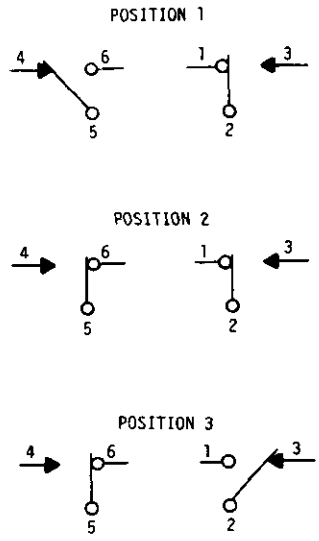

015-11-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	16	1406	94	1468	112	1545	150
0102	16	1407	82	1469	142	1546	150
0103	16	1410	136	1470	146	1547	42
0104	16	1411	136	1471	114	1548	44
0105	16	1412	136	1473	142	1549	44
0107	18	1413	138	1475	146	1550	112
0108	18	1414	138	1476	146	1551	114
0700	16	1416	138	1478	112	1552	142
0800	16	1418	136	1479	114	1553	146
1003	16	1419	136	1480	146	1557	44
1004	16	1420	138	1482	112	1558	44
1005	16	1421	138	1486	112	1562	30
1006	16	1426	150	1487	114	1564	30
1008	16	1427	150	1488	112	1566	30
1009	28	1428	150	1490	146	1568	30
1371	82	1429	92	1491	148	1570	30
1372	84	1430	152	1492	148	1572	32
1373	82	1431	150	1494	112	1574	32
1374	150	1432	92	1495	112	1576	32
1375	136	1433	136	1497	82	1578	32
1376	82	1435	150	1498	84	1580	34
1377	82	1436	150	1499	116	1582	34
1378	82	1438	150	1500	116	1584	36
1380	80	1439	152	1502	116	1586	36
1381	84	1442	144	1503	116	1588	36
1382	152	1444	144	1504	116	1590	36
1383	84	1446	144	1508	114	1592	36
1384	80	1447	144	1509	114	1594	36
1386	80	1448	144	1511	82	1596	36
1387	80	1449	94	1520	84	1598	36
1388	82	1451	112	1522	84	1600	36
1391	94	1452	150	1523	84	1614	34
1394	92	1453	152	1524	84	1616	34
1395	94	1455	142	1533	144	1618	34
1396	92	1456	142	1534	144	1620	32
1397	94	1459	152	1535	146	1622	32
1398	92	1462	152	1536	148	1624	32
1400	92	1464	112	1537	148	1626	32
1402	152	1466	146	1538	150	1628	32
1404	92	1467	146	1539	106	1630	32

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1632	32	2096	52	2186	68	2276	74
2000	46	2098	54	2188	68	2278	76
2002	46	2100	54	2190	68	2280	76
2004	46	2102	54	2192	70	2282	76
2006	46	2104	54	2194	70	2284	76
2008	46	2106	54	2196	70	2286	76
2010	46	2110	54	2198	70	2288	76
2012	46	2112	54	2200	70	2290	76
2014	46	2114	54	2202	70	2292	76
2016	46	2116	54	2204	70	2294	76
2018	46	2118	56	2206	70	2296	76
2020	46	2120	56	2210	70	2298	78
2022	46	2122	56	2212	70	2300	78
2024	48	2124	56	2214	70	2310	84
2030	48	2126	56	2216	70	2312	84
2032	48	2128	56	2218	70	2314	84
2034	48	2130	56	2220	70	2316	84
2036	48	2140	56	2222	72	2318	84
2040	48	2142	56	2224	72	2320	86
2042	48	2144	56	2226	72	2322	86
2044	48	2146	56	2228	72	2324	86
2046	48	2148	58	2230	72	2326	86
2048	50	2150	58	2232	72	2328	86
2050	50	2152	58	2234	72	2330	86
2052	50	2154	58	2236	72	2332	86
2054	50	2156	58	2238	72	2334	86
2056	50	2158	58	2240	72	2336	86
2058	50	2160	58	2250	72	2338	86
2060	50	2162	58	2252	74	2340	86
2070	50	2164	58	2254	74	2344	88
2072	50	2166	58	2256	74	2346	88
2074	50	2168	58	2258	74	2348	88
2076	50	2170	60	2260	74	2350	88
2078	52	2172	60	2262	74	2352	88
2080	52	2174	60	2264	74	2360	88
2082	52	2176	60	2266	74	2362	88
2084	52	2178	60	2268	74	2364	88
2090	52	2180	68	2270	74	2366	88
2092	52	2182	68	2272	74	2368	88
2094	52	2184	68	2274	74	2370	90

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2372	90	2462	100	2550	126	2654	140
2374	90	2464	100	2552	126	2656	140
2376	90	2470	118	2560	126	2660	142
2378	90	2472	118	2562	126	2662	142
2380	90	2474	118	2564	126	2666	142
2382	90	2476	118	2566	126	2668	142
2384	90	2478	118	2568	126	2670	142
2386	90	2480	118	2570	126	2672	142
2388	90	2482	118	2572	128	2674	142
2390	90	2484	118	2574	128	2680	154
2392	92	2486	118	2580	132	2682	154
2394	92	2488	118	2582	132	2684	154
2396	92	2490	118	2584	132	2686	154
2398	92	2492	118	2586	132	2688	154
2400	92	2494	118	2588	132	2690	154
2410	96	2500	122	2590	132	2692	154
2412	96	2502	122	2592	132	2694	154
2414	96	2504	122	2594	132	2696	154
2416	96	2506	122	2596	132	2698	154
2418	96	2508	122	2598	132	2700	78
2420	96	2510	122	2600	132	2702	80
2422	96	2512	122	2602	132	2704	80
2424	96	2514	122	2610	134	2706	80
2426	96	2516	122	2612	134	2708	80
2428	98	2518	122	2614	134	2710	80
2430	98	2520	122	2616	134	2712	80
2432	98	2522	122	2618	134	2800	130
2434	98	2524	122	2620	134	2802	128
2436	98	2526	124	2622	134	3900	35
2438	98	2528	124	2624	134	3901	35
2440	98	2530	124	2626	134	3902	35
2442	98	2532	124	2628	134	3903	35
2444	98	2534	124	2630	134	3904	35
2446	98	2536	124	2640	140	3905	35
2450	100	2538	124	2642	140	3906	35
2452	100	2540	124	2644	140	3907	35
2454	100	2542	124	2646	140	3908	35
2456	100	2544	126	2648	140	3909	35
2458	100	2546	126	2650	140	3910	35
2460	100	2548	126	2652	140	3911	35

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3912	35	4016	27	4056	27	4104	27
3913	35	4017	27	4057	27	4105	27
3914	35	4018	27	4058	27	4106	27
3915	35	4019	27	4059	27	4107	27
3916	35	4020	27	4060	27	4110	27
3917	35	4021	27	4061	27	4111	27
3918	35	4022	27	4062	27	4112	27
3919	35	4023	27	4063	27	4113	27
3920	35	4024	27	4064	27	4662	120
3921	35	4025	27	4065	27	4663	120
3922	35	4026	27	4066	27	4664	120
3923	35	4027	27	4067	27	4665	120
3924	35	4028	27	4068	27	4666	120
3925	35	4029	27	4069	27	4667	120
3926	35	4030	27	4070	27	4669	102
3928	35	4031	27	4071	27	4671	102
3929	35	4032	27	4072	27	4672	120
3930	35	4033	27	4073	27	4674	120
3932	35	4034	27	4074	27	4675	120
3933	35	4035	27	4075	27	4677	120
3934	35	4036	27	4076	27	4678	152
3936	35	4037	27	4077	27	4683	120
3937	35	4038	27	4078	27	4684	116
3938	35	4039	27	4079	27	4685	116
4000	27	4040	27	4080	27	4686	116
4001	27	4041	27	4081	27	4689	102
4002	27	4042	27	4082	27	4691	102
4003	27	4043	27	4083	27	4692	102
4004	27	4044	27	4086	27	4694	102
4005	27	4045	27	4087	27	4695	102
4006	27	4046	27	4088	27	4698	102
4007	27	4047	27	4089	27	4700	100
4008	27	4048	27	4092	27	4701	100
4009	27	4049	27	4093	27	4703	114
4010	27	4050	27	4094	27	4707	144
4011	27	4051	27	4095	27	4708	144
4012	27	4052	27	4098	27	4709	144
4013	27	4053	27	4099	27	4713	138
4014	27	4054	27	4100	27	4714	138
4015	27	4055	27	4101	27	4715	138

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4717	68	4842	66	4950	28	6220	128
4718	100	4844	66	4952	104	6221	128
4719	140	4845	66	4956	106	6222	128
4722	138	4846	66	4958	104	6224	128
4723	138	4847	64	4959	104	6225	128
4726	138	4848	66	4960	104	6226	42
4729	146	4849	62	4975	152	6228	128
4730	146	4850	66	4976	152	6229	128
4731	146	4854	66	4977	152	6231	130
4732	106	4855	66	4978	148	6233	44
4734	106	4856	64	4979	148	6234	130
4735	110	4859	62	4980	94	6235	130
4736	108	4861	66	4981	94	6236	130
4737	108	4862	66	4983	94	6237	130
4738	108	4863	42	4984	94	6238	130
4739	108	4864	42	4985	94	6239	44
4740	108	4865	42	4986	94	6250	42
4741	108	4867	66	4989	102	6251	42
4742	108	4868	44	4991	94	6263	44
4743	110	4869	66	5000	66	6264	44
4745	106	4870	68	5046	20	6265	44
4746	106	4872	106	5048	20	6267	68
4748	106	4874	64	5052	20	6272	42
4749	110	4875	64	5054	20	6273	42
4750	110	4878	102	5060	24	6277	42
4751	110	4884	60	5061	24	6280	64
4752	110	4885	62	5062	24	6292	62
4754	78	4886	62	5063	24	6293	62
4755	78	4891	62	5068	20	6294	62
4756	78	4892	44	5069	20	6296	136
4760	78	4893	44	5070	20	6299	106
4761	78	4894	60	5071	20	6300	62
4762	78	4897	68	6200	144	6308	64
4765	114	4900	64	6201	148	6310	64
4766	104	4901	60	6203	114	6311	62
4770	104	4902	64	6204	116	6312	62
4771	104	4904	20	6205	120	6315	130
4772	104	4905	20	6210	44	6316	130
4773	104	4906	60	6217	128	6318	130
4782	102	4908	60	6219	128	6319	130

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
6320	108	6994	156				
6321	108	6995	156				
6322	108	6996	40				
6323	108	6997	40				
6324	110	6998	40				
6325	110	6999	40				
6326	110	7001	156				
6328	110	7002	156				
6329	110	7003	156				
6330	110	7004	156				
6331	110	7005	156				
6332	110	7021	40				
6333	110	7022	40				
6359	80	7023	40				
6369	16	7024	40				
6370	106	7301	20				
6372	156	7302	20				
6790	36	7345	42				
6791	36	7572	28				
6792	38	7576	28				
6793	38	7577	28				
6794	38	7580	30				
6795	38	7629	156				
6796	38	7630	156				
6797	38	7631	22				
6798	38	7632	22				
6799	38	7633	22				
6801	38	7634	22				
6802	38	7635	22				
6803	38	7636	22				
6804	38	7637	22				
6805	40	7638	22				
6870	156	7639	22				
6873	16	7645	22				
6874	18	7646	22				
6941	18	7647	22				
6942	18						
6991	156						
6992	156						
6993	156						

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Acceleration	42
Actuating Force	46
Actuating Lever	36
Actuating Lever Travel	48
Additional Part Marking	156
Additional Requirements	156
Altitude	48
Altitude, Operating	36
Altitude Rating	24
Anti-Rotational Mounting Means	32
Aperture Cards Required	18
Applicable Documents	158
Base Document	16
Circuit Configuration	50
City, State, Zip	16
Coincidence of Operating and Release Points (Simultaneity)	52
Company Name/Command	16
Configuration	28
Contact Arrangement	32
Contact Bounce	54
Contact Ratings	26
Contact Resistance	56
Contract Number/Office Symbol	16
Control, Source	16
Control, Specification	18
Date	16
Definition of Hermetic Sealing	158
Design and Construction	30
Dielectric Withstanding Voltage at Reduced Barometric Pressure	60
Dielectric Withstanding Voltage at Sea Level	64
Enclosure	30
Endurance, Electrical	68
Endurance, Mechanical	70
Explosion	72
Finishes	30
Flammability (External Flame)	76
Format	16
Fungus	78
Government Design Activity FSCM	16

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Illustrations	28
Insulation Resistance	80
Intermediate Current Switching	84
Life, Low Level Switching	88
Materials	30
Metals	30
Moisture Resistance	92
Mounting Attitude	36
Mounting Hardware	154
Nomenclature	158
Notes	158
Overload	96
Ozone Resistance	100
Packaging	158
Part Marking	156
Part Number	18
Part Number Cross-Reference	158
Phone Number	16
Power Rating	22
Quality Assurance Provisions	158
Ratings	26
Requester FSCM	16
Requester's Name	16
Resistance to Soldering Heat	100
Revision of AEDPS Document (Number)	18
Salt Spray	102
Sand and Dust	104
Scope	18
Seal	106
Short Circuit	118
Shock, High Impact	112
Shock, Specified Pulse	114
Solderability	120
Soldering	36
Source Table	18
Stops Strength	122
Street/Building	16

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Strength of Actuating Means	124
Strength of Mounting Means	126
Superseded Document	158
System Application	16
Tabulated Characteristics	30
Temperature	38
Temperature, High	128
Temperature, Low	130
Temperature Rating	20
Temperature Rise	132
Terminal Designation	34
Terminal Sealing (Fluid Immersion)	134
Terminal Strength	136
Termination Configuration	34
Thermal Shock (Temperature Cycling)	138
Toggle Ice (Icing)	140
Toggle Seal	142
Type of Operation	34
Units of Measure	18, 28
Vibration, High Frequency	142
Vibration, Low Frequency	146
Vibration, Random	150
Waterproofness	154
Weight	40
Workmanship	156

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-70A(MI), dated 15 Dec 1978 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-70A(MI), dated 15 Dec 1978 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.