DOD-STD-35-71A(MI)
14 January 1983
SUPERSEDING
MIL-STD-35-71(MI)
9 July 1974

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

SWITCHES (THERMAL)

AREA EDS

NO DELIVERABLE DATA
REQUIRED BY THIS DOCUMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIAL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Switches, Thermal
Automated Engineering
Document Preparation System

DOD-STD-35-71A(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Command, ATTN: DRSMI-RSDC, Redstone Arsenal, Alabama 35898, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

FOREWORD

1, The purpose of DOD-STD-35-71A(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for Switches, Thermal.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph 1.		SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	3
	2.1	Issues of documents	3
	2.2	Other publications	4
	3.	DEFINITIONS	5
	4.	GENERAL REQUIREMENTS	7
	4.1	Introduction	7
	4.2	Specificaiton Requirement Sheet	7
	4.3	Configuration	7
	4.3.1	Dimensions	7
	4.3.2	Illustrations	7
	4.4	Units of measure	7
	5.	DETAILED REQUIREMENTS	8
	5.1	Introduction	8
	5.2	MSE Formats	8
	5.3	Referenced documents	8
	5.4	Test matrix	8
	5.5	Tabulation	9
	5.6	Keyword Code Index (KCI) and Standard Paragraphs	13
	5.6.1	Interrelationship of Codes	13
	5.6.2	Automatic MSE Data	13
	5.6.3	DOD-STD-35 Tables	13

TABLES

Table	I.	Title Index	2
	II.	Test matrix	9
	III.	Tabulation candidates	10

APPENDICES

Appendix	A.	Illustrations	173
	B.	Characteristic Code Index	195
		Index	203

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS) provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for thermal switches.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate a MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered parts the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
co Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. It is recommended that MIL-STD-1132, Selection and Use of Switches and Associated Hardware, be reviewed prior to using this dash-numbered part book.

The title code for a MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSEs for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on a SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for a MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
SWITCH, THERMOSTATIC	017001	MIL-S-12285	ENGINE FLUID
		MIL-T-21944	MINES
		MIL-S-24236	ELECT. EQUIP.
		MIL-S-25345	GENERATOR
		MIL-S-28827	VOLATILE LIQ.
		MIL-S-82529	FUZE
		MS18110	HEATER
SWITCH, THERMOSTATIC, HEATING AND AIR CONDITIONING	17002	MIL-S-29175	HOUSING

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-E-13856	Electrical Components for Automotive Vehicles; Waterproofness and Resistance to Temperature Cycling Tests, General Requirements for
MIL-F-13927	Fungus Resistance Test, Automotive Components
MIL-S-24236	Switches, Thermostatic, (Metalic and Bimetallic) Sealed, General Specification for
MIL-S-28827	Switches, Thermostatic, (Volatile Liquid) Hermetically Sealed, General Specification for
MIL-S-82529	Switch, Thermal Mark 56 Mod 1

STANDARDS

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-810	Environmental Test Methods
MIL-STD-1276	Leads for Electronic Component Parts
MIL-STD-1285	Marking of Electrical and Electronic Parts

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTME380 Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, PA. 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Switches, Thermal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare a SRS for a thermal switch, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Switches, Thermal.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Switches, Thermal.

4.3.2 Illustrations. Illustrations applicable to Switches, Thermal are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Test matrix. A test matrix is supplied as a guide for selecting documents to specify tests (see table II). The test matrix presents documents most applicable for use to satisfy the statement "TEST PER (DOC DES)". Any document listed in the Title Index may be used to satisfy the statement. However, the selected document from the Title Index must contain the desired test. Government test method documents and approved industry standards such as ASTM test methods may also be used to satisfy the statement, "TEST PER (DOC DES)".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE II. TEST MATRIX.

Document	TEST CODE	Calibration 1654	Endurance 1724	Overload 1843	Sensitivity 1873	Short Circuit 2420
MIL-S-12285		X	X		X	
MIL-T-21944		X	X			
MIL-S-24236		X	X	X	X	X
MIL-S-25345		X	X		X	
MIL-S-28827		X	X	X	X	X
MIL-S-82529					X	

5.5 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table III provides codes for column headings which may be used for thermal switch characteristics. When different units-of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1590	BASE DOC TYPE	1591	BASE DOC CLASS	1592	BASE DOC KIND
1593	BASE DOC CLASSIFI-CATION	1594	BASE DOC CONFIGUR-ATION	3595	LIFE CYCLE RATING
4000	RES RATING VOLTS DC	4004	RES RATING AMPS DC	4008	RES RATING VOLTS AC
4016	RES RATING AMPS AC	4020	IND RATING VOLTS DC	4024	IND RATING AMPS DC
4028	IND RATING VOLTS AC	4036	IND RATING AMPS AC	4064	LAMP RTG VOLTS DC
4068	LAMP RTG AMPS DC	4072	LAMP RTG VOLTS AC	4080	LAMP RTG AMPS AC
4100	OPEN ON INCREASING TEMP DEG C	4101	OPEN ON INCREASING TEMP + TOL DEG C.	4102	OPEN ON INCREASING TEMP - TOL DEG C.
4103	OPEN ON DECREASING TEMP DEG C	4104	OPEN ON DECREASING TEMP + TOL DEG C	4105	OPEN ON DECREASING TEMP - TOL DEG C
4106	CLOSE ON INCREASING TEMP DEG C	4107	CLOSE ON INCREASING TEMP + TOL DEG C	4108	CLOSE ON INCREASING TEMP - TOL DEG C
4109	CLOSE ON DECREASING TEMP DEG C		CLOSE ON DECREASING TEMP + TOL DEG C		CLOSE ON DECREASING TEMP - TOL DEG C
4112	OPENING TEMP DEG C		OPENING TEMP + TOL DEG C	4314	OPENING TEMP - TOL DEG C

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE II. TABULATION CANDIDATES. (CONT)

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
4115	CLOSING TEMP DEG C	4116	CLOSING TEMP + TOL DEG C	4317	CLOSING TEMP – TOL DEG C
4118	SWITCHING TEMP DEG C	4119	SWITCHING TEMP + TOL DEG C	4120	SWITCHING TEMP – TOL DEG C
4123	MAXIMUM DIFFEREN– TIAL DEG C	4124	DIFFEREN– TIAL DEG C	4125	OPEN ON INCREASING TEMP DEG F
4126	OPEN ON INCREASING TEMP + TOL DEG F	4127	OPEN ON INCREASING TEMP – TOL DEG F	4328	OPEN ON DECREASING TEMP DEG F
4129	OPEN ON DECREASING TEMP + TOL DEG F	4130	OPEN ON DECREASING TEMP – TOL DEG F	4131	CLOSE ON INCREASING TEMP DEG F
4132	CLOSE ON INCREASING TEMP + TOL DEG F	4133	CLOSE ON INCREASING TEMP – TOL DEG F	4134	CLOSE ON DECREASING TEMP DEG F
4135	CLOSE ON DECREASING TEMP + TOL DEG F	4336	CLOSE ON DECREASING TEMP – TOL DEG F	4337	OPENING TEMP DEG F
4138	OPENING TEMP + TOL DEG F	4339	OPENING TEMP – TOL DEG F	4140	CLOSING TEMP DEG F
4141	CLOSING TEMP + TOL DEG F	4142	CLOSING TEMP – TOL DEG F	4143	SWITCHING TEMP DEG F
4144	SWITCHING TEMP + TOL DEG F	4145	SWITCHING TEMP – TOL DEG F	4148	MAXIMUM DIFFEREN- TIAL DEG F

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE II. TABULATION CANDIDATES (CONT)

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
4149	DIFFEREN-TIAL DEG F	7021	MAX MASS GRAMS	7022	MAX WEIGHT OUNCES
7023	MAX WEIGHT POUND	7024	MAX MASS KILOGRAM		

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

5.6 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on a SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.6.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.6.2 Automatic MSE data. Some statements, such as Altitude and Temperature will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.6.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM (NUMBER)	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT.	0700
ONE SECTION DOCUMENT.	0800
*CONTROL (SELECT ONE)	
SOURCE,	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
O101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1O04	USER FSCM 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1O06, EXCEPT AS SPECIFIED IN THIS DOCUMENT IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1O08	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMbTIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6874 THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).

0107

0108 0108.

SCOPE,

SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.

PART NUMBER, THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.

PART NUMBER. THE PART NUMBER FOR THE ITEMS IS (THE SAME AS THE NUMBER OF THIS DOCUMENT) PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

6941 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.

6942 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION	
IN ACCORDANCE WITH THE BASE DOCUMENT	
TYPE (DESIGNATION)	1590
CLASS (DESIGNATION)	1591
KIND (DESIGNATION)	1592
CLASSIFICATION (DESIGNATION)	1593
CONFIGURATION (DESIGNATION)	1594
LIFE CYCLE RATING	
(CYCLES)	1595
RATINGS (SEE RATING TABLE)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

CLASSIFICATION.

1590 THE TYPE SHALL BE 1590 IN ACCORDANCE WITH THE BASE DOCUMENT.

1591 THE CLASS SHALL BE 1591 IN ACCORDANCE WITH THE BASE DOCUMENT.

1592 THE KIND SHALL BE 1592 IN ACCORDANCE WITH THE BASE DOCUMENT.

1593 THE CLASSIFICATION SHALL BE 1593 IN ACCORDANCE WITH THE BASE DOCUMENT.

1594 THE CONFIGURATION SHALL BE 1594 IN ACCORDANCE WITH THE BASE DOCUMENT.

LIFE CYCLE RATING.

1595 THE LIFE CYCLE RATING SHALL BE 1595 CYCLES.

RATING. THE SWITCH RATING SHALL BE IN ACCORDANCE WITH THE RATING TABLE.

RATING TABLE

CHARACTERISTIC OR PARAMETER	LOAD TYPE	POLE 1	POLE 2	POLE 3	POLE 4
VOLTS D.C.	RESISTIVE	4000	4001	4002	4003
AMPERES D.C.	RESISTIVE	4004	4005	4006	4007
VOLTS A.C. (RMS)	RESISTIVE	4008	4009	4010	4011
FREQUENCY (HERTZ)	RESISTIVE	4012	4013	4014	4015
AMPERES A.C.	RESISTIVE	4016	4017	4018	4019
VOLTS D.C.	INDUCTIVE	4020	4021	4022	4023
AMPERES D.C.	INDUCTIVE	4024	4025	4026	4027
VOLTS A.C. (RMS)	INDUCTIVE	4028	4029	4030	4031
FREQUENCY (HERTZ)	INDUCTIVE	4032	4033	4034	4035

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RATINGS (SEE RATING TABLE) (CONT)	
ALTITUDE RATING	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5060
SEA LEVEL TO (METERS)	5061
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5062
SEA LEVEL TO (METERS)	5063

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

RATING TABLE (CONT)

CHARACTERISTIC OR PARAMETER	LOAD TYPE	POLE 1	POLE 2	POLE 3	POLE 4
AMPERES A.C.	INDUCTIVE	4036	4037	4038	4039
VOLTS D.C.	MOTOR	4040	4041	4042	4043
AMPERES D.C.	MOTOR	4044	4045	4046	4047
VOLTS A.C. (RMS)	MOTOR	4048	4049	4050	4051
FREQUENCY (HERTZ)	MOTOR	4052	4053	4054	4055
AMPERES A.C.	MOTOR	4056	4057	4058	4059
AMPERES A.C.	LOCKED ROTOR	4060	4061	4062	4063
VOLTS D.C.	LAMP	4064	4065	4066	4067
AMPERES D.C.	LAMP	4068	4069	4070	4071
VOLTS A.C. (RMS)	LAMP	4072	4073	4074	4075
FREQUENCY (HERTZ)	LAMP	4076	4077	4078	4079
AMPERES A.C.	LAMP	4080	4081	4082	4083

ALTITUDE RATING.

5060 THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5060 FEET.

5061 THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5061 METERS.

5062 THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5062 FEET.

5063 THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5063 METERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE RATING	
MAXIMUM OPERATING (DEGREES CELSIUS)	5069
MAXIMUM NONOPERATING (DEGREES CELSIUS)	5071
MAXIMUM STORAGE (DEGREES CELSIUS)	7302
MINIMUM OPERATING (DEGREES CELSIUS)	5068
MINIMUM NONOPERATING (DEGREES CELSIUS)	5070
MINIMUM STORAGE (DEGREES CELSIUS)	7301
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
*UNITS (SELECT ONE)	
U.S.	
INCHES.	7572
SI	
MILLIMETERS.	7577

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	TEMPERATURE RATING.
5069	THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS.
5071	THE MAXIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5071 DEGREES CELSIUS.
7302	THE MAXIMUM STORAGE TEMPERATURE RATING SHALL BE 7302 DEGREES CELSIUS.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.
5070	THE MINIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5070 DEGREES CELSIUS.
7301	THE MINIMUM STORAGE TEMPERATURE RATING SHALL BE 7301 DEGREES CELSIUS.
	CONFIGURATION,
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950
NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.	
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	
MATERIALS (SEE TABLE VI, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VI IS USED.	
FINISHES (SEE TABLE VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
METALS	
DISSIMILAR METALS.	7580

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.
	MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
	FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
7580	METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION	
HOUSING (SELECT ONE)	
HERMETICALLY SEALED.	1562
OPEN.	1564
DUST TIGHT.	1566
WATER TIGHT.	1568
ENCAPSULANT SEALED.	1570
EXPLOSION PROOF.	1572
OTHER ____	1573
CONTACT CONDITION	
POLE ONE (SELECT ONE)	
OPEN.	1600
CLOSED.	1602
POLE TWO (SELECT ONE)	
OPEN.	1604
CLOSED.	1606
POLE THREE (SELECT ONE)	
OPEN.	1608
CLOSED.	1610

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	DESIGN AND CONSTRUCTION-
	HOUSING.
1562	THE HOUSING SHALL BE HERMETICALLY SEALED.
1564	THE HOUSING SHALL BE OPEN.
1566	THE HOUSING SHALL BE DUST TIGHT.
1568	THE HOUSING SHALL BE WATER TIGHT.
1570	THE HOUSING SHALL BE ENCAPSULANT SEALED.
1572	THE HOUSING SHALL BE EXPLOSION PROOF.
1573	THE HOUSING SHALL BE 1573.
	CONTACT CONDITION.
1600	POLE NUMBER ONE SHALL BE NORMALLY OPEN.
1602	POLE NUMBER ONE SHALL BE NORMALLY CLOSED.
1604	POLE NUMBER TWO SHALL BE NORMALLY OPEN.
1606	POLE NUMBER TWO SHALL BE NORMALLY CLOSED.
1608	POLE NUMBER THREE SHALL BE NORMALLY OPEN.
1610	POLE NUMBER THREE SHALL BE NORMALLY CLOSED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND-CONSTRUCTION (CONT)	
CONTACT CONDITION (CONT)	
POLE FOUR (SELECT ONE)	
OPEN.	1609
CLOSED.	1611
CONTACT ARRANGEMENT	
(CIRCUIT)	2000
(FORM)	2002
OTHER ARRANGEMENTS (SELECT ONE)	
SPST.	2004
SPDT.	2006
DPDT.	2008
(POLE)	2010
*(THROW)	2012
OTHER _____	2014
TERMINATION (SELECT ONE)	
MIL-STD-1276 (TYPE)	1612
PER TERMINATION TABLE	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1609	POLE NUMBER FOUR SHALL BE NORMALLY OPEN.
1611	POLE NUMBER FOUR SHALL BE NORMALLY CLOSED.
	CONTACT ARRANGEMENT.
2000	THE CONTACT ARRANGEMENT SHALL BE 2000 CIRCUIT.
2002	THE CONTACT ARRANGEMENT SHALL BE FORM 2002.
2004	THE CONTACT ARRANGEMENT SHALL BE SINGLE POLE, SINGLE THROW.
2006	THE CONTACT ARRANGEMENT SHALL BE SINGLE POLE, DOUBLE THROW.
2008	THE CONTACT ARRANGEMENT SHALL BE DOUBLE POLE, DOUBLE THROW.
2010 2o12	THE CONTACT ARRANGEMENT SHALL BE 2030 POLE 2012 THROW.
2014	THE CONTACT ARRANGEMENT SHALL BE 2014.
1612	TERMINATION MIL-STD-1276, TERMINATION SHALL BE IN ACCORDANCE WITH LEAD TYPE 1612.
	TERMINATIONS. THE TERMINATION CONFIGURATION SHALL BE IN ACCORDANCE WITH THE TERMINATION CONFIGURATION TABLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
PER TERMINATION TABLE (CONT)	
CONNECTOR	
(PART NUMBER)	1618
(SPECIFICATION)	1614
(MATING CONNECTOR PART NUMBER)	1616
ENVIRONMENTAL TEST EFFECT (SELECT ONE)	
(DEGREES CELSIUS)	1640
(DEGREES FAHRENHEIT)	1641

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

TERMINATION CONFIGURATION TABLE

ITEM	SIZE	LENGTH/THICKNESS	QUANTITY
SCREW ATTACHMENT	3900	3901	3902
WIRE LEAD	3903	3904	3905
SINGLE TURRET	3906	3907	3908
DOUBLE TURRET	3909	3910	3911
J-HOOK	3912	3913	3914
SOLDER EYE	3915	3916	3917
SOLDER LUG	3918	3919	3920
SLIP-ON LUG	3921	3922	3923
CONNECTOR	3924	3925	3926

CONNECTOR.

1618 THE CONNECTOR PART NUMBER SHALL BE 1~~618.~~

1614 THE CONNECTOR SHALL CONFORM TO 1~~614.~~

1616 THE CONNECTOR SHALL MATE WITH 1~~616.~~

1640 ENVIRONMENTAL TEST EFFECT. THE CHANGE IN OPERATION POINT DUE TO TWO OR MORE ENVIRONMENTAL TESTS SHALL BE NOT GREATER THAN 1640 DEGREES CELSIUS.

1641 ENVIRONMENTAL TEST EFFECT. THE CHANGE IN OPERATION POINT DUE TO TWO OR MORE ENVIRONMENTAL TESTS SHALL BE NOT GREATER THAN 1641 DEGREES FAHRENHEIT.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
THERMOMETER (SELECT ONE)	
RANGE	
*MINIMUM (DEGREES FAHRENHEIT)	1580
*MAXIMUM (DEGREES FAHRENHEIT)	1582
ACCURACY (DEGREES FAHRENHEIT)	1584
RANGE	
*MINIMUM (DEGREES CELSIUS)	1581
*MAXIMUM (DEGREES CELSIUS)	1583
ACCURACY (DEGREES CELSIUS)	1585
WEIGHT/MASS	
MAXIMUM WEIGHT/MASS PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

THERMOMETER (ATTACHED TO ROOM THERMOSTAT).

1580 THE THERMOMETER SHALL HAVE A RANGE FROM 1580 TO 1582
1582 DEGREES FAHRENHEIT.

1584 THE THERMOMETER SHALL HAVE A TEMPERATURE ACCURACY OF PLUS OR MINUS 1584 DEGREES FAHENHEIT.

1581 THE THERMOMETER SHALL HAVE A RANGE FROM 1581 TO 1583
1583 DEGREES CELSIUS,

1585 THE THERMOMETER SHALL HAVE A TEMPERATURE ACCURACY OF PLUS OR MINUS 1585 DEGREES CELSIUS.

7022 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).

7023 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).

7021 MAXIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).

7024 MAXIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME

ACCELERATION

REQUIREMENTS (SELECT ONE)

PER BASE DOCUMENT EXCEPT ____

NO EVIDENCE OF PHYSICAL DAMAGE.

NO LAMP IN TEST CIRCUIT SHALL LIGHT.

SWITCHING POINT (SELECT ONE)

CONFORM TO CALIBRATION REQUIREMENTS.

MAXIMUM CHANGE (DEGREES CELSIUS)

MAXIMUM CHANGE (DEGREES FAHRENHEIT)

TEST METHODS (SELECT ONE)

PER BASE DOCUMENT EXCEPT ____

PER MIL-STD-202, METHOD 212.

*TEST CONDITION LETTER (SELECT ONE)

TEST CONDITION LETTER A.

*LEVEL (SELECT QNE)

20 G'S.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	CHAR CODE	STANDARD PARAGRAPH
6272	6272	ACCELERATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6272.
6273	6273	ACCELERATION. THERE SHALL BE NO EVIDENCE (IF PHYSICAL DAMAGE.
1547	1547	NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.
2530	2530	UNITS SHALL CONFORM TO CALIBRATION REQUIREMENTS AFTER TEST.
2532	2532	THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 2532 DEGREE(S) CELSIUS.
2534	2534	THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 2534 DEGREE(S) FAHRENHEIT.
6250	6250	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6250.
6251	6251	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 212 OF MIL-STD-202.
6226	6226	TEST CONDITION LETTER A SHALL APPLY.
4863	4863	THE TEST LEVEL SHALL BE 20 G'S.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATION (CONT)	
*LEVEL (SELECT ONE) (CONT)	
50 G'S.	4864
100 G'S.	4865
TEST CONDITION LETTER B.	6233
*LEVEL (SELECT ONE)	
10,000 G'S.	4868
20,000 G'S.	4892
DIRECTION (SELECT ONE)	
ONE DIRECTION.	1557
BOTH DIRECTIONS.	1558
TEST CONDITION LETTER C.	6239
*LEVEL (G'S.)	4893
MOUNTING (SELECT ONE)	
MOUNT BY ANY SUITABLE METHOD.	6263
MOUNT BY NORMAL METHOD.	6264
MOUNT PER DOCUMENT (DOC DES)	6265
PERCENT RATED LOAD APPLIED (PERCENT)	6210
MONITOR PER MEHTOD 310 OF MIL-STD-202	
*TEST CIRCUIT (LETTER)	1548

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4864	THE TEST LEVEL SHALL BE 50 G'S.
4865	THE TEST LEVEL SHALL BE 100 G'S.
6233	TEST CONDITION LETTER B SHALL APPLY.
4868	THE TEST LEVEL SHALL BE 10,000 G'S.
4892	THE TEST LEVEL SHALL BE 20,000 G'S.
1557	THE SPECIMEN SHALL BE ACCELERATED IN ONE DIRECTION ONLY.
1558	THE SPECIMEN SHALL BE ACCELERATED IN BOTH DIRECTIONS.
6239	TEST CONDITION LETTER C SHALL APPLY.
4893	THE TEST LEVEL SHALL BE 4893 G'S.
6263	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
6264	MOUNTING SHALL BE BY THE NORMAL METHOD.
6265	MOUNTING SHALL BE IN ACCORDANCE WITH 6265.
6210	THE ELECTRICAL LOAD SHALL BE 6210 PERCENT OF THE RATED LOAD.
1548	MONITORING DURING THE TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1548 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATION (CONT)	
MONITOR PER METHOD 310 OF MIL-STD-202 (CONT)	
*TEST CONDITION (LETTER)	1549
CALIBRATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1668
PER CALIBRATION TABLE	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1549 TEST CONDITION LETTER 1549 IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202 SHALL APPLY.

1668 CALIBRATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1668.

CALIBRATION. THE CALIBRATION PARAMETERS SHALL BE IN ACCORDANCE WITH THE VALUES SPECIFIED IN THE CALIBRATION TABLE.

CALIBRATION TABLE

SWITCHING POINT	DEGREES C	DEGREES F
OPEN ON INCREASING TEMPERATURE	4100	4125
OPEN ON INCREASING TEMPERATURE TOLERANCE (PLUS)	4101	4126
OPEN ON INCREASING TEMPERATURE TOLERANCE (MINUS)	4102	4127
OPEN ON DECREASING TEMPERATURE	4103	4128
OPEN ON DECREASING TEMPERATURE TOLERANCE (PLUS)	4104	4129
OPEN ON DECREASING TEMPERATURE TOLERANCE (MINUS)	4105	4130
CLOSE ON INCREASING TEMPERATURE	4106	4131
CLOSE ON INCREASING TEMPERATURE TOLERANCE (PLUS)	4107	4132
CLOSE ON INCREASING TEMPERATURE TOLERANCE (MINUS)	4108	4133
CLOSE ON DECREASING TEMPERATURE	4109	4134
CLOSE ON DECREASING TEMPERATURE TOLERANCE (PLUS)	4110	4135
CLOSE ON DECREASING TEMPERATURE TOLERANCE (MINUS)	4111	4136
OPENING TEMPERATURE	4112	4137
OPENING TEMPERATURE TOLERANCE (PLUS)	4113	4138
OPENING TEMPERATURE TOLERANCE (MINUS)	4114	4139
CLOSING TEMPERATURE	4115	4140

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CALIBRATION (CONT)	
PER CALIBRATION TABLE (CONT)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

CALIBRATION TABLE

SWITCHING POINT	DEGREES C	DEGREES F
CLOSING TEMPERATURE TOLERANCE (PLUS)	4116	4141
CLOSING TEMPERATURE TOLERANCE (MINUS)	4117	4142
SWITCHING TEMPERATURE	4118	4143
SWITCHING TEMPERATURE TOLERANCE (PLUS)	4119	4144
SWITCHING TEMPERATURE TOLERANCE (MINUS)	4120	4145
TEMPERATURE ADJUSTMENT RANGE MINIMUM	4121	4146
TEMPERATURE ADJUSTMENT RANGE MAXIMUM	4122	4147
MAXIMUM DIFFERENTIAL	4123	4148
DIFFERENTIAL	4124	4149
4150	4151	4152
4153	4154	4155
4156	4157	4158
4159	4160	4161
4162	4163	4164

NOTE A: 3500.
NOTE B: 3501.
NOTE C: 3502.
NOTE D: 3503.
NOTE E: 3504.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CALIBRATION (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1652
PER (DOC DES)	1654
TEST FIXTURE ____	2100
INITIAL FIXTURE TEMPERATURE (SELECT ONE)	
(DEGREES CELSIUS)	2102
(DEGREES FAHRENHEIT)	2104
MAXIMUM TEMPERATURE CHANGE RATE (SELECT ONE)	
(DEGREES CELSIUS/MINUTE)	1656
(DEGREES FAHRENHEIT/MINUTE)	2106
SECOND OR FINAL FIXTURE TEMPERATURE (SELECT ONE)	
(DEGREES CELSIUS)	2108
(DEGREES FAHRENHEIT)	2110
CYCLES FOR AVERAGE (CYCLES)	1660

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1652	CALIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1652.
1654	CALIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1654.
2100	TEST FIXTURE SHALL BE 2100.
2102	INITIAL FIXTURE TEMPERATURE SHALL BE 2102 DEGREES CELSIUS.
2104	INITIAL FIXTURE TEMPERATURE SHALL BE 2104 DEGREES FAHRENHEIT.
1656	TEMPERATURE CHANGE RATE SHALL BE NOT GREATER THAN 1656 DEGREE(S) CELSIUS PER MINUTE.
2106	TEMPERATURE CHANGE RATE SHALL BE NOT GREATER THAN 2106 DEGREE(S) FAHRENHEIT PER MINUTE.
2108	SECOND OR FINAL FIXTURE TEMPERATURE SHALL BE 2108 DEGREES CELSIUS.
2110	SECOND OR FINAL FIXTURE TEMPERATURE SHALL BE 2110 DEGREES FAHRENHEIT.
1660	THE NUMBER OF CYCLES USED TO COMPUTE THE AVERAGE SHALL BE 1660.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CALIBRATION (CONT)	
PER (DOC DES) (CONT)	
MAXIMUM TIME BETWEEN TEMPERATURE EXPOSURES (SELECT ONE)	
(SECONDS)	2112
(MINUTES)	2114
CONNECTOR TORQUE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2120
NO PHYSICAL DAMAGE.	2122
SWITCHING POINT (SELECT ONE)	
CONFORM TO CALIBRATION REQUIREMENTS,	2124
MAXIMUM CHANGE (DEGREES CELSIUS)	2126
MAXIMUM CHANGE (DEGREES FAHRENHEIT)	2128
*TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2140
PER MIL-S-28827.	2142

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2112	THE TIME BETWEEN TEMPERATURE EXPOSURES SHALL BE NOT GREATER THAN 2112 SECOND(S).
2114	THE TIME BETWEEN TEMPERATURE EXPOSURES SHALL BE NOT GREATER THAN 2114 MINUTE(S).
2120	CONNECTOR TORQUE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2120.
2122	CONNECTOR TORQUE. THERE SHALL BE NO LOOSENING, ROTATION, DISTORTION, SHORT CIRCUIT OR OTHER DAMAGE.
2124	UNITS SHALL CONFORM TO CALIBRATION REQUIREMENTS AFTER TEST.
2126	THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 2126 DEGREE(S) CELSIUS.
2128	THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 2128 DEGREE(S) FAHRENHEIT.
2140	CONNECTOR TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2140.
21142	CONNECTOR TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-28827.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONNECTOR TORQUE (CONT)	
PER MIL-S-28827. (CONT)	
APPLIED TORQUE (SELECT ONE)	
(POUND-FEET)	2144
(NEWTON METERS)	2146
TORQUE DURATION (MINUTES)	2148
CONTACT RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1688
MAXIMUM CONTACT RESISTANCE (MILLIOHMS)	1690
MAXIMUM CONTACT RESISTANCE (OHMS)	2150
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1672
PER MIL-STD-202, METHOD 307.	1673
MAXIMUM CURRENT (AMPERES)	1674
MAXIMUM OPEN CIRCUIT VOLTAGE (VOLTS DC)	1676

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2144	A TORQUE OF 2144 POUND-FEET SHALL BE APPLIED IN THE DIRECTION OF CONNECTOR MATING ROTATION.
2146	A TORQUE OF 2146 NEWTON METER(S) SHALL BE APPLIED IN THE DIRECTION OF CONNECTOR MATING ROTATION.
2148	DURATION OF TORQUE APPLICATION SHALL BE 2148 MINUTE(S).
1688	CONTACT RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1688.
1690	CONTACT RESISTANCE. THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1690 MILLIOHM(S).
2150	CONTACT RESISTANCE. THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2150 OHM(S).
1672	CONTACT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1672.
1673	CONTACT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-202, METHOD 3070
1674	THE TEST CURRENT SHALL BE NOT GREATER THAN 1674 AMPERE(S).
1676	THE OPEN CIRCUIT VOLTAGE SHALL BE NOT GREATER THAN 1676 VOLTS DC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 307. (CONT)	
BEFORE TEST ACTIVATIONS (NUMBER)	1678
TEST ACTIVATION (NUMBER)	1680
MEASUREMENTS/ACTIVATION (NUMBER)	1682
METHOD OF CONNECTION _____	1684
CREEPAGE (SNAP ACTION OPERATION)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1710
SIMULTANEOUS OPERATION.	1712
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1702
PER MIL-S-24236.	1704
(CYCLES)	1706

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1678	THE NUMBER OF ACTIVATIONS BEFORE TEST SHALL BE 1678.
1680	THE NUMBER OF TEST ACTIVATIONS SHALL BE 1680.
1682	THE NUMBER OF MEASUREMENTS PER TEST ACTIVATION SHALL BE 1682.
1684	THE METHOD OF CONNECTION SHALL BE 1684.
1710	CREEPAGE (SNAP ACTION OPERATION). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1710.
1712	CREEPAGE (SNAP ACTION OPERATION). THE OPENING AND CLOSING OF SWITCH CONTACTS SHALL OCCUR SIMULTANEOUSLY WITH, AND AS A RESULT OF, THE SWITCH OPERATION.
1702	CREEPAGE (SNAP ACTION OPERATION). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1702.
1704	CREEPAGE (SNAP ACTION OPERATION). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-24236.
1706	THE NUMBER OF COMPLETE TEST CYCLES SHALL BE 1706.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CURRENT CAPACITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2160
AS FOLLOWS:	2162
MAXIMUM VOLTAGE DROP CIRCUIT ONE (SELECT ONE)	
-(VOLTS)	2164
(MILLIVOLTS)	2166
MAXIMUM VOLTAGE DROP CIRCUIT TWO (SELECT ONE)	
(VOLTS)	2168
(MILLIVOLTS)	2170
MAXIMUM VOLTAGE DROP CIRCUIT THREE (SELECT ONE)	
(VOLTS)	2172
(MILLIVOLTS)	2174
MAXIMUM VOLTAGE DROP CIRCUIT FOUR (SELECT ONE)	
(VOLTS)	2176
(MILLIVOLTS)	2178

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2160	CURRENT CAPACITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2160.
2162	CURRENT CAPACITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS.
2164	THE VOLTAGE DROP FOR CIRCUIT 1 SHALL BE NOT GREATER THAN 2164 VOLT(S).
2166	THE VOLTAGE DROP FOR CIRCUIT 1 SHALL BE NOT GREATER THAN 2166 MILLIVOLT(S).
2168	THE VOLTAGE DROP FOR CIRCUIT 2 SHALL BE NOT GREATER THAN 2168 VOLT(S).
2170	THE VOLTAGE DROP FOR CIRCUIT 2 SHALL BE NOT GREATER THAN 2170 MILLIVOLT(S).
2172	THE VOLTAGE DROP FOR CIRCUIT 3 SHALL BE NOT GREATER THAN 2172 VOLT(S).
2174	THE VOLTAGE DROP FOR CIRCUIT 3 SHALL BE NOT GREATER THAN 2174 MILLIVOLT(S).
2176	THE VOLTAGE DROP FOR CIRCUIT 4 SHALL BE NOT GREATER THAN 2176 VOLT(S).
2178	THE VOLTAGE DROP FOR CIRCUIT 4 SHALL BE NOT GREATER THAN 2178 MILLIVOLT(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CURRENT CAPACITY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2190
PER MIL-S-82529.	2192
APPLIED CURRENT	
CIRCUIT ONE (AMPERES)	2194
CIRCUIT TWO (AMPERES)	2196
CIRCUIT THREE (AMPERES)	2198
CIRCUIT FOUR (AMPERES)	2200
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4908
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDQWNO	4906

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2190	CURRENT CAPACITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2190.
2192	CURRENT CAPACITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-82529.
2194	APPLY 2194 AMPERE(S) TO CIRCUIT NUMBER 1 AND RECORD THE VOLTAGE DROP.
2196	APPLY 2196 AMPERE(S) TO CIRCUIT NUMBER 2 AND RECORD THE VOLTAGE DROP.
2198	APPLY 2198 AMPERE(S) TO CIRCUIT NUMBER 3 AND RECORD THE VOLTAGE DROP.
2200	APPLY 2200 AMPERE(S) TO CIRCUIT NUMBER 4 AND RECORD THE VOLTAGE DROP.
4908	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4908.
4906	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN. (CONT)	
MAXIMUM LEAKAGE (MILLIAMPERES)	4894
SWITCHING POINT (SELECT ONE)	
CONFORM TO CALIBRATION REQUIREMENTS.	2540
MAXIMUM CHANGE (DEGREES CELSIUS)	2542
MAXIMUM CHANGE (DEGREES FAHRENHEIT)	2544
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4884
PER MIL-STD-202, METHOD 301.	6300
*ALTITUDE PER METHOD 105 OF MIL-STD-202	
*TEST CONDITION (LETTER)	4886
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4885

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4894	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4894 MILLIAMPERE(S).
2540	UNITS SHALL CONFORM TO CALIBRATION REQUIREMENTS AFTER TEST.
2542	THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 2542 DEGREE(S) CELSIUS.
2544	THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 2544 DEGREE(S) FAHRENHEIT.
4884	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4884.
6300	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.
4886	ALTITUDE SHALL BE IN ACCORDANCE WITH TEST CONDITION LETTER 4886 OF METHOD 105 OF MIL-STD-202.
4885	TEST VOLTAGE SHALL BE 4885 VOLTS, DC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
~~DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE~~ (CONT)	
*TEST VOLTAGE (SELECT ONE) (CONT)	
(VOLTS, AC)	4849
POINTS OF VOLTAGE APPLICATION	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	6311
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	6312
BETWEEN MUTUALLY INSULATED PARTS.	6292
BETWEEN ALL INSULATED PARTS AND GROUND.	6293
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	6294
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4859
DURATION OF VOLTAGE APPLICATION (SECONDS)	4891
MOUNTING PER DOCUMENT (DOC DES)	6280

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4849	TEST VOLTAGE SHALL BE 4849 VOLTS, AC.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS.
6311	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
6312	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
6292	BETWEEN MUTUALLY INSULATED PARTS.
6293	BETWEEN ALL INSULATED PARTS AND GROUND.
6294	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
4859	SPECIAL PREPARATION SHALL BE IN ACCORDANCE WITH 4859.
4891	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4891 SECOND(S).
6280	MOUNTING SHALL BE IN ACCORDANCE WITH 6280.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4874
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, OR INSULATION BREAKDOWN.	4856
MAIXMUM LEAKAGE (MILLIAMPERES)	4875
SWITCHING POINT (SELECT ONE)	
CONFORM TO CALIBRATION REQUIREMENTS.	2550
MAXIMUM CHANGE (DEGREES CELSIUS)	2552
MAXIMUM CHANGE (DEGREES FAHRENHEIT)	2554
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4861
PER MIL-STD-202, METHOD 301.	4862

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4874 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.

4856 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MACHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.

4875 THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4875 MILLIAMPERE(S).

2550 UNITS SHALL CONFORM TO CALIBRATION REQUIREMENTS AFTER TEST.

2552 THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 2552 DEGREE(S) CELSIUS.

2554 THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 2554 DEGREE(S) FAHRENHEIT.

4861 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861.

4862 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4854
(VOLTS, AC)	4855
POINTS OF VOLTAGE APPLICATION	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	4842
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	4848
BETWEEN MUTUALLY INSULATED PARTS.	4844
BETWEEN ALL INSULATED PARTS AND GROUND.	4845
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	4846
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4850
DURATION OF VOLTAGE APPLICATION (SECONDS)	4867
MOUNTING PER DOCUMENT (DOC DES)	5000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4854	TEST VOLTAGE SHALL BE 4854 VOLTS, DC.
4855	TEST VOLTAGE SHALL BE 4855 VOLTS, AC.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS.
4842	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
4848	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
4844	BETWEEN MUTUALLY INSULATED PARTS.
4845	BETWEEN ALL INSULATED PARTS AND GROUND.
4846	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
4850	SPECIAL PREPARATION OR CONDITIONS SHALL BE IN ACCORDANCE WITH 4850.
4867	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4867 SECOND(S).
5000	MOUNTING SHALL BE IN ACCORDANCE WITH 5000.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1742
AS FOLLOWS:	1743
NO INTERMITTENT OPERATION.	1744
SWITCH POINT (SELECT ONE)	
CONFORM TO CALIBRATION REQUIREMENTS.	1746
MAXIMUM CHANGE (DEGREES CELSIUS)	1752
MAXIMUM CHANGE (DEGREES FAHRENHEIT)	2210
MAXIMUM AFTER TEST CONTACT RESISTANCE (MILLIOHMS)	1756
CONFORM TO INSULATION RESISTANCE REQUIREMENTS.	2212
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1722
PER (DOC DES)	1724
(CYCLES)	1726

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1742	ENDURANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1742.
1743	ENDURANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS.
1744	THERE SHALL BE NO INDICATION OF INTERMITTENT SWITCH OPERATION.
1746	UNITS SHALL CONFORM TO CALIBRATION REQUIREMENTS AFTER TEST.
1752	THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 1752 DEGREE(S) CELSIUS.
22110	THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 2210 DEGREE(S) FAHRENHEIT.
1756	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1756 MILLIOHM(S) AFTER TEST.
2212	UNITS SHALL CONFORM TO INSULATION RESISTANCE REQUIREMENT(S) AFTER TEST.
1722	ENDURANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1722.
1724	ENDURANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE wITH 1724.
1726	THE NUMBER OF OPERATING CYCLES SHALL BE 1726.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE (CONT)	
PER (DOC DES) (CONT)	
APPLIED VOLTAGE (SELECT ONE)	
(VOLTS DC)	2214
(VOLTS AC)	2216
LOAD (PERCENT OF RATED)	1732
LOAD (TYPE)	1734
CYCLE RATE (CYCLES PER MINUTE)	1736
EXPLOSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1776
NO EXPOSION OF CHAMBER MEDIA.	1778
CONFORM TO CALIBRATION REQUIREMENTS.	2220
REMAIN OPERATIVE.	1780
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1762

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2214	THE APPLIED VOLTAGE SHALL BE 2214 VOLT(S) DC.
2216	THE APPLIED VOLTAGE SHALL BE 2216 VOLT(S) AC.
1732	THE LOAD SHALL BE 1732 PERCENT OF RATED LOAD.
1734	THE TYPE OF LOAD SHALL BE 1734.
1736	THE CYCLE RATE SHALL BE 1736 CYCLES PER MINUTE.
1776	EXPLOSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1776.
1778	EXPLOSION. THERE SHALL BE NO EXPLOSION WITHIN THE TEST CHAMBER WITH THE EXPLOSION BEING CONFINED BY THE SWITCH HOUSING.
2220	UNITS SHALL CONFORM TO CALIBRATION REQUIREMENTS AFTER TEST.
3780	THE SWITCHES SHALL BE ELECTRICALLY AND MECHANICALLY OPERATIVE AFTER TEST.
1762	EXPLOSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1762.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
EXPLOSION (CONT)	
TEST(METHODS (CONT)	
PER MIL-STD-202, METHOD 109.	2222
LOAD (PERCENT OF RATED)	1766
LOAD (TYPE)	1767
CHAMBER TEMPERATURE (SELECT ONE)	
(DEGREES CELSIUS)	1768
TOLERANCE (DEGREES CELSIUS)	1770
(DEGREES FAHRENHEIT)	2224
TOLERANCE (DEGREES FAHRENHEIT)	2226
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4760
FUNGUS RESISTANT BY CERTIFICATION OR BY TEST.	4761

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2222 EXPLOSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 109 OF MIL-STD-202.

1766 THE LOAD SHALL BE 1766 PERCENT OF RATED LOAD.

1767 THE LOAD TYPE SHALL BE 1767.

1768 THE CHAMBER TEMPERATURE SHALL BE 1768 DEGREES CELSIUS.

1770 THE CHAMBER TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1770 DEGREE(S) CELSIUS.

2224 THE CHAMBER TEMPERATURE SHALL BE 2224 DEGREES FAHRENHEIT.

2226 THE CHAMBER TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2226 DEGREE(S) FAHRENHEIT.

4760 FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.

4761 FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FUNGUS (CONT)	
REQUIREMENTS (SELECT ONE) (CONT)	
NO EVIDENCE OF GROWTH WHEN TESTED,	4762
CONFORM TO CALIBRATION REQUIREMENTS.	2560
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4754
PER MIL-STD-810, METHOD 5080	4755
TEST PERIOD (DAYS)	4756
PER MIL-F-13927.	2566
CLASS (DESIGNATION)	2568
METHOD (DESIGNATION)	2570
FLAME RESPONSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1800
MAXIMUM OPERATION TIME (SECONDS)	1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE | STANDARD PARAGRAPH

4762 FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.

2560 UNITS SHALL CONFORM TO CALIBRATION REQUIREMENTS AFTER TEST.

4754 FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.

4755 FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.

4756 TEST PERIOD SHALL BE 4756 DAY(S).

2566 FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-13927.

2568 CLASS 2568 SHALL APPLY.

2570 METHOD 2570 SHALL APPLY.

1800 FLAME RESPONSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1800.

1802 FLAME RESPONSE. THE TIME REQUIRED FOR SWITCH OPERATION SHALL BE NOT GREATER THAN 1802 SECOND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLAME RESPONSE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1784
PER MIL-S-24236.	1786
FLAME TEMPERATURE (SELECT ONE)	
(DEGREES CELSIUS)	1788
TOLERANCE (DEGREES CELSIUS)	1790
(DEGREES FAHRENHEIT)	2230
TOLERANCE (DEGREES FAHRENHEIT)	2232
DURATION OF FLAME APPLICATION (SECONDS)	1794
(CYCLES)	1796
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4798
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	4799
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1477

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1784 FLAME RESPONSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1784.

1786 FLAME RESPONSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-24236.

1788 THE FLAME TEMPERATURE SHALL BE 1788 DEGREES CELSIUS.

1790 THE FLAME TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1790 DEGREES CELSIUS.

2230 THE FLAME TEMPERATURE SHALL BE 2230 DEGREES FAHRENHEIT.

2232 THE FLAME TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2232 DEGREES Fahrenheit

1794 THE DURATION OF FLAME APPLICATION TO THE SWITCH SENSING ELEMENT SHALL BE 1794 SECOND(S).

1796 THE NUMBER OF CYCLES SHALL BE 1796.

4798 HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.

4799 HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.

1477 THERE SHALL BE NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DIELECTRIC WITHSTANDING VOLTAGE IS APPLIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE. (CONT)	
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	4795
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	4805
SWITCHING POINT (SELECT ONE)	
CONFORM TO CALIBRATION REQUIRMENTS.	2580
MAXIMUM CHANGE (DEGREES CELSIUS)	2582
MAIXMUM CHANGE (DEGREES FAHRENHEIT)	2584
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4788
PER MIL-STD-202, METHOD 103.	4853
*TEST CONDITION (LETTER)	4890
POLARIZING VOLTAGE (VOLTS, DC)	4793
DURATION OF POLARIZING VOLTAGE APPLICATION (HOURS)	4790

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4795 INSULATION RESISTANCE SHALL BE NOT LESS THAN 4795 MEGOHM(S) AT HIGH HUMIDITY.

4805 INSULATION RESISTANCE SHALL BE NOT LESS THAN 4805 MEGOHM(S) AFTER DRYING.

2580 UNITS SHALL CONFORM TO CALIBRATION REQUIREMENTS AFTER TEST.

2582 THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 2582 DEGREE(S) CELSIUS.

2584 THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 2584 DEGREE(S) FAHRENHEIT.

4788 HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.

4853 HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 103 OF MIL-STD-202.

4890 TEST CONDITION LETTER 4890 SHALL APPLY.

4793 MAGNITUDE OF THE POLARIZING VOLTAGE SHALL BE 4793 VOLTS, DC.

4790 DURATION OF APPLICATION OF VOLTAGE SHALL BE 4790 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
PER MIL-STD-202, METHOD 103. (CONT)	
POINTS OF APPLICATION OF POLARIZING VOLTAGE	
BETWEEN MUTUALLY INSULATED PARTS.	4969
BETWEEN ALL INSULATED PARTS AND GROUND.	4970
BETWEEN CURRENT CARRYING PARTS AND CASE.	4971
BETWEEN CURRENT CARRYING PARTS AND GROUND.	6202
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	6207
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	6206
IMMERSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4819
NO EVIDENCE OF PHYSICAL DAMAGE.	4820
MINIMUM INSULATION RESISTANCE (MEGOHMS)	4825

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS.
4969	BETWEEN MUTUALLY INSULATED PARTS.
4970	BETWEEN ALL INSULATED PARTS AND GROUND.
4971	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
6202	BETWEEN CURRENT CARRYING PARTS AND GROUND.
6207	DIELECTRIC WITHSTANDING VOLTAGE TEST SHALL BE PERFORMED AT HIGH HUMIDITY.
6206	DIELECTRIC WITHSTANDING VOLTAGE TEST SHALL BE PERFORMED AFTER DRYING.
4819	IMMERSION THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT ~~4819~~.
4820	IMMERSION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4825	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 4825 MEGOHM(S),

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMMERSION (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE (CONT)	
SWITCHING POINT (SELECT ONE)	
CONFORM TO CALIBRATION REQUIREMENTS.	2590
MAXIMUM CHANGE (DEGREES CELSIUS)	2592
MAXIMUM CHANGE (DEGREES FAHRENHEIT)	2594
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4809
PER MIL-STD-202, METHOD 104.	4810
*TEST CONDITION (LETTER)	4811
MEASUREMENTS AFTER FINAL CYCLE (HOURS)	4812
TIME BEFORE MEASUREMENTS AFTER FINAL CYCLE (HOURS)	4814
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1380
AS FOLLOWS:	6359

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2590	UNITS SHALL CONFORM TO CALIBRATION REQUIREMENTS AFTER TEST.
2592	THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 2592 DEGREE(S) CELSIUS.
2594	THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 2594 DEGREE(S) FAHRENHEIT.
4809	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4809.
4810	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 104 OF MIL-STD-202.
4811	TEST CONDITION LETTER 4811 SHALL APPLY.
4832	FINAL MEASUREMENT(S) SHALL BE MADE WITHIN 4812 HOUR(S) AFTER FINAL CYCLE.
4814	MEASUREMENTS SHALL BE NOT MADE UNTIL 4814 HOUR(S) AFTER THE FINAL CYCLEo
1380	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.
6359	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
AS FOLLOWS. (CONT)	
*MINIMUM INSULATION RESISTANCE (SELECT ONE)	
SINGLE TEST	
(MEGOHMS)	1386
MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	1384
*SECOND TEST (MEGOHMS)	1387
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1371
PER MIL-STD-202, METHOD 302,	1511
*CONDITION (SELECT ONE)	
TEST CONDITION (LETTER)	1378
TEST VOLTAGE (VOLTS, DC)	1373
ELECTRIFICATION TIME (SECONDS)	1376
MAXIMUM MEASUREMENT ERROR AT REQUIRED VALUE (PERCENT)	1377

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1386 INSULATION RESISTANCE SHALL BE NOT LESS THAN 1386 MEGOHM(S).

1384 INSULATION RESISTANCE SHALL BE NOT LESS THAN 1384 MEGOHM(S) AT THE FIRST TEST TEMPERATURE

1387 INSULATION RESISTANCE SHALL BE NOT LESS THAN 1387 MEGOHM(S) AT THE SECOND TEST TEMPERATURE.

1371 INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.

1511 INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 302 OF MIL-STD-202.

1378 TEST CONDITION LETTER 1378 SHALL APPLY.

1373 TEST POTENTIAL SHALL BE 1373 VOLTS, DC.

1376 ELECTRIFICATION DURATION SHALL BE 1376 SECOND(S).

1377 THE MEASUREMENT ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1377 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 302. (CONT)	
POINTS OF MEASUREMENT	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	1497
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	1498
BETWEEN MUTUALLY INSULATED PARTS.	1522
BETWEEN INSULATED PARTS AND GROUND.	1523
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	1524
SPECIAL PREPARATIONS OR CONDITIONS PER DOCUMENT (DOC DES)	1520
FIRST TEST TEMPERATURE (DEGREES CELSIUS)	1372
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	1381
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1383
CONDITIONING DURATION (HOURS)	2600
CONDITIONING TEMPERATURE (SELECT ONE)	
(DEGREES CELSIUS)	2602

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	POINTS OF INSULATION RESISTANCE MEASUREMENT SHALL BE AS FOLLOWS.
1497	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
1498	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
1522	BETWEEN MUTUALLY INSULATED PARTS.
1523	BETWEEN ALL INSULATED PARTS AND GROUND.
1524	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
1520	SPECIAL PREPARATIONS OR CONDITIONS SHALL BE IN ACCORDANCE WITH 1520.
1372	FIRST TEST TEMPERATURE SHALL BE 1372 DEGREES CELSIUS.
1381	SECOND TEST TEMPERATURE SHALL BE 1381 DEGREES CELSIUS.
1383	TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1383 DEGREES CELSIUS.
2600	BEFORE TEST UNITS SHALL BE CONDITIONED FOR NOT LESS THAN 2600 HOURS.
2602	CONDITIONING TEMPERATURE SHALL BE 2602 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
CONDITIONING TEMPERATURE (SELECT ONE) (CONT)	
TOLERANCE (DEGREES CELSIUS)	2604
(DEGREES FAHRENHEIT)	2606
TOLERANCE (DEGREES FAHRENHEIT)	2608
CONDITIONING RELATIVE HUMIDITY (PERCENT)	2610
HUMIDITY TOLERANCE (PERCENT)	2612
INTERMEDIATE CURRENT SWITCHING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2240
AS FOLLOWS:	2242
FAILURE(S) ALLOWED (QUANTITY)	2244
ADDITIONAL TOLERANCE (SELECT ONE)	
(DEGREES CELSIUS)	2246

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2604 CONDITIONING TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2604 DEGREE(S) CELSIUS.

2606 CONDITIONING TEMPERATURE SHALL BE 2606 DEGREES FAHRENHEIT.

2608 CONDITIONING TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2608 DEGREE(S) FAHRENHEIT.

2610 CONDITIONING RELATIVE HUMIDITY S14ALL BE 2610 PERCENT.

2612 CONDITIONING RELATIVE HUMIDITY TOLERANCE SHALL BE PLUS OR MINUS 2612 PERCENT.

2240 INTERMEDIATE CURRENT SWITCHING, THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2240.

2242 INTERMEDIATE CURRENT SWITCHING. THE REQUIREMENT(S) SHALL BE AS FOLLOWS.

2244 THERE SHALL BE 2244 FAILURE(S) ALLOWED. A FAILURE IS DEFINED AS A CYCLE OF OPERATION DURING WHICH ANY SWITCH CIRCUIT UNDER TEST FAILS TO OPEN IN PROPER SEQUENCE AS DETECTED BY MONITORING DEVICE.

2246 THE ALLOWABLE TEMPERATURE TOLERANCE DURING AND AFTER TEST SHALL BE THE INITIAL TEMPERATURE TOLERANCE AND AN ADDITIONAL PLUS OR MINUS 2246 DEGREE(S) CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INTERMEDIATE CURRENT SWITCHING (CONT)	
ADDITIONAL TOLERANCE (SELECT ONE) (CONT)	
(DEGREES FAHRENHEIT)	2248
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2250
PER MIL-STD-202, METHOD 312.	2252
RESISTIVE LOAD (VOLTS DC)	2254
LOAD TOLERANCE (VOLTS DC)	2256
(CYCLES)	2258
MAXIMUM CYCLE RATE (CYCLES PER MINUTE)	2260
MONITORING FOR STICKING NOT APPLICABLE.	2262
LOW LEVEL SWITCHING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2270
AS FOLLOWS:	2272

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2248	THE ALLOWABLE TEMPERATURE TOLERANCE DURING AND AFTER TEST SHALL BE THE INITIAL TEMPERATURE TOLERANCE AND AN ADDITIONAL PLUS OR MINUS 2248 DEGREE(S) FAHRENHEIT.
2250	INTERMEDIATE CURRENT SWITCHING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2250.
2252	INTERMEDIATE CURRENT SWITCHING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 312 OF MIL-STD-202.
2254	THE RESISTIVE LOAD VOLTAGE APPLIED TO THE CONTACTS SHALL BE 2254 VOLT(S) DC.
2256	THE VOLTAGE TOLERANCE SHALL BE PLUS OR MINUS 2256 VOLT(S) DC.
2258	THERE SHALL BE 2258 CYCLES OF OPERATION.
2260	THE CYCLING RATE SHALL BE NOT GREATER THAN 2260 CYCLES PER MINUTE.
2262	MONITORING OF CONTACTS FOR STICKING SHALL NOT BE APPLICABLE.
2270	LOW-LEVEL SWITCHING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2270.
2272	LOW-LEVEL SWITCHING. THE REQUIREMENT(S) SHALL BE AS FOLLOWS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LOW LEVEL SWITCHING (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM CONTACT RESISTANCE (MILLIOHMS)	2274
ADDITIONAL TOLERANCE (SELECT ONE)	
(DEGREES CELSIUS)	2276
(DEGREES FAHRENHEIT)	2278
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2280
PER MIL-STD-202, METHOD 311.	2282
(CYCLES)	2284
MAXIMUM CYCLE RATE (CYCLES PER MINUTE)	2286
MONITORING FOR STICKING NOT APPLICABLE.	2288
MOISTURE RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1400

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2274	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2274 MILLIOHM(S) EITHER DURING OR AFTER TEST.
2276	THE ALLOWABLE TEMPERATURE TOLERANCE DURING AND AFTER TEST SHALL BE THE INITIAL TEMPERATE TOLERANCE AND AN ADDITIONAL PLUS OR MINUS 2276 DEGREE(S) CELSIUS.
2278	THE ALLOWABLE TEMPERATURE TOLERANCE DURING AND AFTER TEST SHALL BE THE INITIAL TEMPERATURE TOLERANCE AND AN ADDITIONAL PLUS OR MUNUS 2278 DEGREE(S) FAHRENHEIT.
2280	LOW LEVEL Switching TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2280.
2282	LOW LEVEL SWITCHING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 311 OF MIL-STD-202,
2284	THE NUMBER OF TEST CYCLES SHALL BE 2284.
2286	CYCLING RATE SHALL BE NOT GREATER THAN 2286 CYCLES PER MINUTE.
2288	MONITORING OF CONTACTS FOR STICKING SHALL NOT BE APPLICABLE.
1400	MOISTURE RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1400.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE (CONT)	
REQUIREMENTS (SELECT ONE) (CONT)	
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	1396
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1394
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDTIY (MEGOHMS)	1432
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	1406
SWITCHING POINT (SELECT ONE)	
CONFORM TO CALIBRATION REQUIREMENTS.	2620
MAXIMUM CHANGE (DEGREES CELSIUS)	2622
MAXIMUM CHANGE (DEGREES FAHRENHEIT)	2624
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1391
PER MIL-STD-202, METHOD 106.	1397

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1396	MOISTURE RESISTANCE. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
1394	THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING OR INSULATION BREAKDOWN, WHEN DIELECTRIC WITHSTANDING VOLTAGE IS APPLIED.
1432	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1432 MEGOHM(S) AT HIGH HUMIDITY.
1406	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1406 MEGOHM(S) AFTER DRYING.
2620	UNITS SHALL CONFORM TO CALIBRATION REQUIREMENTS AFTER TEST.
2622	THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 2622 DEGREE(S) CELSIUS.
2624	THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 2624 DEGREE(S) FAHRENHEIT.
1391	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1391.
1397	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 106 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 106. (CONT)	
POLARIZING VOLTAGE (VOLTS. DC)	1395
LOADING VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4981
(VOLTS, AC)	4980
PERCENT OF SAMPLE SUBJECTED TO POLARIZING VOLTAGE (PERCENT)	4991
STEP 7A NOT APPLICABLE.	4985
STEP 7B NOT APPLICABLE*	4986
MOUNT PER DOCUMENT (DOC DES)	1449
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	4983
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	4984
MOUNTING TORQUE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2300
NO EVIDENCE OF PHYSICAL DAMAGE.	2302

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1395	POLARIZING VOLTAGE SHALL BE 1395 VOLTS, DC.
4981	LOADING VOLTAGE SHALL BE 4981 VOLTS, DC.
4980	LOADING VOLTAGE SHALL BE 4980 VOLTS, AC.
4991	4991 PERCENT OF THE SAMPLE SHALL BE SUBJECTED TO THE POLARIZING VOLTAGE.
4985	STEP 7A OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE-
4986	STEP 7B OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
1449	MOUNTING SHALL BE IN ACCORDANCE WITH 1449.
4983	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY,
4984	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.
2300	MOUNTING TORQUE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2300.
2302	MOUNTING TORQUE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOUNTING TORQUE (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
REMAIN OPERABLE.	2304
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2306
PER MIL-S-24236.	2308
APPLIED TORQUE (SELECT ONE)	
(POUND-FEET)	2310
(NEWTON METERS)	2312
TORQUE DURATION (MINUTES)	2314
OVERLOAD	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1858
AS FOLLOWS:	2320
NO STICKING OR WELDING.	2322
NO MECHANICAL OR ELECTRICAL FAILURE.	1860
MAXIMUM CONTACT RESISTANCE (MILLIOHMS)	1862

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2304	SWITCHES SHALL BE OPERABLE AFTER TEST.
2306	MOUNTING TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2306.
2308	MOUNTING TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-24236.
2310	A TORQUE OF 2310 POUND-FEET SHALL BE APPLIED.
2312	A TORQUE OF 2312 NEWTON METER(S) SHALL BE APPLIED.
2314	DURATION OF TORQUE APPLICATION SHALL BE NOT LESS THAN 2314 MINUTE(S).
1858	OVERLOAD. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1858.
2320	OVERLOAD. THE REQUIREMENTS SHALL BE AS FOLLOWS.
2322	THERE SHALL BE NO EVIDENCE OF STICKING OR WELDING OF CONTACTS.
1860	THERE SHALL BE NO EVIDENCE OF MECHANICAL OR ELECTRICAL FAILURE.
1862	THE CONTACT RESISTANCE AFTER TEST SHALL BE NOT GREATER THAN 1862 MILLIOHM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OVERLOAD (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1842
PER (DOC DES)	1843
APPLIED RATED RESISTANCE LOAD (PERCENT)	1846
DUTY CYCLE	
*ON (PERCENT)	1848
*OFF (PERCENT)	1849
CYCLE RATE (CYCLES PER MINUTE)	1852
(CYCLES)	1854
PROOF PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2330
NO LEAKAGE OR DAMAGE.	2332
SNITCHING POINT (SELECT ONE)	
CONFORM TO CALIBRATION REQUIREMENTS.	2334

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1842	OVERLOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1842.
1843	OVERLOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1843.
1846	THE PERCENTAGE OF RATED RESISTIVE LOAD TO BE APPLIED SHALL BE 1846 PERCENT.
1848 1849	THE DUTY CYCLE SHALL BE APPROXIMATELY 1848 PERCENT ON, 1849 PERCENT OFF.
1852	THE CYCLE RATE SHALL BE 1852 CYCLES PER MINUTE.
1854	THE TOTAL NUMBER OF TEST CYCLES SHALL BE 1854.
2330	PROOF PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2330.
2332	PROOF PRESSURE. THERE SHALL BE NO EVIDENCE OF LEAKAGE OR DAMAGE.
2334	UNITS SHALL CONFORM TO CALIBRATION REQUIREMENTS AFTER TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PROOF PRESSURE (CONT)	
SWITCHING POINT (SELECT ONE) (CONT)	
MAXIMUM CHANGE (DEGREES CELSIUS)	2336
MAXIMUM CHANGE (DEGREES FAHRENHEIT)	2338
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT____	2340
PER MIL-S-28827.	2342
APPLIED PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2344
(KILOPASCALS)	2346
PROOF TEMPERATURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2350
NO EVIDENCE OF DAMAGE.	2352
SWITCHING POINT (SELECT ONE)	
CONFORM TO CALIBRATION REQUIREMENTS.	2354

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2336 THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 2336 DEGREE(S) CELSIUS.

2338 THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 2338 DEGREE(S) FAHRENHEIT.

2340 PROOF PRESSURE, TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOUCMENT, EXCEPT 2340.

2342 PROOF PRESSURE, TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-28827.

2344 THE APPLIED PRESSURE SHALL BE 2344 POUNDS PER SQUARE INCH.

2346 THE APPLIED PRESSURE SHALL BE 2346 KILOPASCAL(S).

2350 PROOF TEMPERATURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2350.

2352 PROOF TEMPERATURE. THERE SHALL BE NO EVIDENCE OF DAMAGE.

2354 UNITS SHALL CONFORM TO CALIBRATION REQUIREMENTS AFTER TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PROOF TEMPERATURE (CONT)	
SWITCHING POINT (SELECT ONE) (CONT)	
MAXIMUM CHANGE (DEGREES CELSIUS)	2356
MAXIMUM CHANGE (DEGREES FAHRENHEIT)	2358
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2360
PER MIL-S-28827.	2362
PROOF TEMPERATURE (SELECT ONE)	
(DEGREES CELSIUS)	2364
(DEGREES FAHRENHEIT)	2366
EXPOSURE DURATION (MINUTES)	2368
RADIOGRAPHIC	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	6291

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2356 THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 2356 DEGREE(S) CELSIUS.

2358 THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 2358 DEGREE(S) FAHRENHEIT.

2360 PROOF TEMPERATURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOOCUMENT, EXCEPT 2360.

2362 PROOF TEMPERATURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-28827.

2364 PROOF TEMPERATURE SHALL BE 2364 DEGREES CELSIUS.

2366 PROOF TEMPERATURE SHALL BE 2366 DEGREES FAHRENHEIT.

2368 EXPOSURE DURATION AT PROOF TEMPERATURE SHALL BE 2368 MINUTE(S).

62911 RADIOGRAPHIC. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6291.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RADIOGRAPHIC (CONT)	
REQUIREMENTS (SELECT ONE) (CONT)	
NO INHOMOGENEITIES, FOREIGN PARTICLES, INCORRECT ALIGNMENT, DEFECTS.	6371
*DISPOSITION OF NEGATIVES OR RECORDS (SELECT ONE)	
DELIVERED,	4857
NOT DELIVERED.	4858
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6282
PER MIL-STD-202, METHOD 209.	4843
SOURCE-OBJECT DISTANCE (SELECT ONE)	
(METERS)	6286

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6371	RADIOGRAPHIC. THE EXAMINATION OF THE RADIOGRAPHS OF THE ITEMS SHALL SHOW: NO INHOMOGENEITIES, NO FOREIGN PARTICLES WITHIN THE ENCLOSURE, ALL PARTS CORRECTLY ALIGNED WITH EACH OTHER. NO DEFECTIVE WORKMANSHIP DETAILS, OR ANY OTHER DEFECTS SPECIFIED HEREIN. MANUFACTURERS SHALL PROVIDE A MEANS OF IDENTIFYING ITEMS ON THE NEGATIVES (OR NONFILM RECORDS, IF APPLICABLE).
4857	NEGATIVES (OR NONFILM RECORDS, IF APPLICABLE) SHALL BE DELIVERED WITH EACH SHIPMENT OF ITEMS.
4858	NEGATIVES (OR NONFILM RECORDS, IF APPLICABLE) SHALL BE MADE AVAILABLE FOR EXAMINATION UPON REQUEST.
6282	RADIOGRAPHIC. RADIOGRAPHIC INSPECTION SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6282.
4843	RADIOGRAPHIC. RADIOGRAPHIC INSPECTION SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 209 OF MIL-STD-202.
6286	THE SOURCE-OBJECT DISTANCE (THE DISTANCE FROM THE FOCAL SPOT OF THE X-RAY TUBE TO THE OBJECT BEING RADIOGRAPHED SHALL BE 6286 METER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RADIOGRAPHIC (CONT)	
SOURCE-OBJECT DISTANCE (CONT)	
(INCHES)	6285
VIEWING EQUIPMENT (IDENTIFY) ____	6287
MAGNIFICATION (X-POWER)	6288
DEFECTS SOUGHT (IDENTIFY) ____	6289
NONFILM TECHNIQUES ALLOWED.	6284
PENETRAMETER WIRE SIZE (SELECT ONE)	
(AWG)	6283
(MILLIMETERS)	5297

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6285 THE SOURCE-OBJECT DISTANCE (THE DISTANCE FROM THE FOCAL SPOT OF THE X-RAY TUBE TO THE OBJECT BEING RADIOGRAPHED) SHALL BE 6285 INCH(S).

6287 THE VIEWING EQUIPMENT SHALL BE 6287.

6288 THE IMAGES SHALL BE VIEWED AT 6288 X-POWER MAGNIFICATION.

6289 THE DEFECTS TO BE SOUGHT SHALL BE 6289.

6284 NONFILM TECHNIQUES MAY BE USED, IF DESIRED, RECORDS SHALL BE MAINTAINED, FOR EXAMINATION OR DELIVERY, AS SPECIFIED.

6283 TO FURTHER INSURE ADEQUATE QUALITY, A RADIOGRAPH OF THE PENETRAMETER SHALL BE INCLUDED ON EACH RADIOGRAPHIC FILM. THE PENETRAMETER SHALL BE MADE FROM A SAMPLE ITEM OF THE SAME TYPE AS THE ITEM BEING INSPECTED (RADIOGRAPHED). THE PENETRAMETER SHOULD UTILIZE AN AWG SIZE 6263 COPPER WIRE ON THE SIDE OF THE ITEM FARTHEST FROM THE X-RAY FILM.

5297 TO FURTHER INSURE ADEQUATE QUALITY, A RADIOGRAPH OF THE PENETRAMETER SHALL BE INCLUDED ON EACH RADIOGRAPHIC FILM. THE PENETRAMETER SHALL BE MADE FROM A SAMPLE ITEM OF THE SAME TYPE AS THE ITEM BEING INSPECTED (RADIOGRAPHED). THE PENETRAMETER SHOULD UTILIZE A 5297 MILLIMETER(S) DIAMETER COPPER WIRE ON THE SIDE OF THE ITEM FARTHEST FROM THE X-RAY FILM.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO SOLDERING HEAT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4700
NO EVIDENCE OF PHYSICAL DAMAGE.	4701
SWITCHING POINT (SELECT ONE)	
CONFORM TO CALIBRATION REQUIREMENTS.	2630
MAXIMUM CHANGE (DEGREES CELSIUS)	2632
MAXIMUM CHANGE (DEGREES FAHRENHEIT)	2634
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2636
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4689
PER MIL-STD-202, METHOD 210.	4698
*TEST CONDITION (LETTER)	4691
NUMBER OF TERMINATIONS TESTED (QUANTITY)	4694
DEPTH OF IMMERSION IN SOLDER (SELECT ONE)	
(INCHES)	4692

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4700	RESISTANCE TO SOLDERING HEAT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4700.
4701	RESISTANCE TO SOLDERING HEAT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2630	UNITS SHALL CONFORM TO CALIBRATION REQUIREMENTS AFTER TEST.
2632	THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 2632 DEGREE(S) CELSIUS.
2634	THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 2634 DEGREE(S) FAHRENHEIT.
2636	THE INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 2636 MEGOHMS.
4689	RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4689.
4698	RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 210 OF MIL-STD-202.
4691	TEST CONDITION LETTER 4691 SHALL APPLY.
4694	4694 TERMINATION(S) PER UNIT SHALL BE TESTED.
4692	DEPTH OF IMMERSION IN SOLDER SHALL BE 4692 INCH(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO SOLDERING HEAT (CONT)	
DEPTH OF IMMERSION IN SOLDER (SELECT ONE) (CONT)	
(MILLIMETERS)	4669
IMMERSION IN FLUX PERMITTED.	4671
SPECIAL PREPARATIONS PERMITTED,	4989
COOLING TIME (MINUTES)	4695
RESISTANCE TO SOLVENTS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4834
NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.	4830
MARKING SHALL REMAIN LEGIBLE.	4836
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4829
PER MIL-STD-202, METHOD 215.	4839
SOLVENTS TO BE ADDED (NAME)	4838

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4669	DEPTH OF IMMERSION IN SOLDER SHALL BE 4669 MILLIMETER(S).
4671	IMMERSION OF TERMINALS IN FLUX SHALL BE PERMITTED.
4989	SPECIAL PREPARATIONS SHALL BE PERMITTED.
4695	COOLING TIME SHALL BE 4695 MINUTES PRIOR TO FINAL EXAMINATION AND MEASUREMENTS.
4834	RESISTANCE TO SOLVENTS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4834.
4830	RESISTANCE TO SOLVENTS. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCES
4836	MARKING SHALL REMAIN LEGIBLE.
4829	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH BASE DOCUMENT, EXCEPT 4829.
4839	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 215 OF MIL-STD-202. THE SPECIMENS SHALL BE DIVIDED INTO GROUPS OF EQUAL NUMBER TO THE EXTENT POSSIBLE.
4838	IN ADDITION TO THE SPECIFIED SOLVENT(S), 4838 SHALL ALSO BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO SOLVENTS (CONT)	
PER MIL-STD-202, METHOD 215. (CONT)	
SOLVENTS TO BE DELETED (SUBPARAGRAPH LETTER)	4835
BRUSHED AREA (SELECT ONE)	
BRUSH MARKING AREA.	4831
ALL OF SPECIMEN TO BE BRUSHED.	6279
SALT SPRAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4878
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE.	4782
SWITCHING POINT (SELECT ONE)	
CONFORM TO CALIBRATION REQUIREMENTS,	2640
MAXIMUM CHANGE (DEGREES CELSIUS)	2642
MAXIMUM CHANGE (DEGREES FAHRENHEIT)	2644
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4770

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4835 BRUSHING SHALL BE PERFORMED WITH THE SOLVENTS IN ACCORDANCE WITH METHOD 215 OF MIL-STD-202, EXCEPT THAT 4835 SHALL NOT BE USED.

4831 THE MARKING AREA SHALL BE BRUSHED.

6279 THE ENTIRE SURFACE SHALL BE BRUSHED.

4878 SALT SPRAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4878.

4782 SALT SPRAY. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.

2640 UNITS SHALL CONFORM TO CALIBRATION REQUIREMENTS AFTER TEST.

2642 THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 2642 DEGREE(S) CELSIUS.

2644 THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 2644 DEGREE(S) FAHRENHEIT.

4770 SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4770.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT SPRAY (CONT)	
TEST METHODS (SELECT ONE) (CONT)	
PER MIL-STD-202, METHOD 101.	4771
*TEST CONDITION (LETTER)	4772
MOUNTING (SELECT ONE)	
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4773
MOUNTING SHALL BE BY NORMAL METHOD.	4765
MOUNTING SHALL BE BY ANY SUITABLE METHOD.	4766
SAND AND DUST	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4958
NO EVIDENCE OF DUST PENETRATION.	4959
SWITCHING POINT (SELECT ONE)	
CONFORM TO CALIBRATION REQUIREMENTS.	2650
MAXIMUM CHANGE (DEGREES CELSIUS)	2652
MAXIMUM CHANGE (DEGREES FAHRENHEIT)	2654

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4771	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 101 OF MIL-STD-202.
4772	TEST CONDITION LETTER 4772 SHALL APPLY.
4773	MOUNTING SHALL BE IN ACCORDANCE WITH 4773.
4765	MOUNTING SHALL BE BY THE NORMAL METHOD.
4766	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4958	SAND AND DUST. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4958.
4959	SAND AND DUST. THERE SHALL BE NO EVIDENCE OF DUST PENETRATION.
2650	UNITS SHALL CONFORM TO CALIBRATION REQUIREMENTS AFTER TEST.
2652	THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 2652 DEGREE(S) CELSIUS.
2654	THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 2654 DEGREE(S) FARENHEIT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SAND AND DUST (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4952
PER MIL-STD-202, METHOD 110.	4960
TEST SPECIMEN(S) SHALL BE OPERATED DURING-TEST STEP(S) (NUMBER)	4872
*DURATION OF OPERATION (HOURS)	6299
SPECIMEN ORIENTATION SHALL BE CHANGED DURING TEST.	1539
SECOND 6-HOUR TEST REQUIRED IMMEDIATELY FOLLOWING TEMPERATURE STABILIZATION IN STEP 2.	4956
SEAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4745
AS FOLLOWS:	6370
SPECIFIED TEST METHOD SENSITIVITY.	4746
NO BUBBLES INDICATIVE OF LEAKAGE.	4748

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4952	SAND AND DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4952.
4960	SAND AND DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 110 OF MIL-STD-202.
4872	ITEM(S) SHALL BE OPERATED DURING STEP(S) 4872.
6299	DURATION OF OPERATION SHALL BE 6299 HOUR(S).
1539	ORIENTATION SHALL BE CHANGED DURING TEST.
4956	THE SECOND 6-HOUR TEST SHALL BE PERFORMED IMMEDIATELY AFTER REACHING TEMPERATURE STABILIZATION IN STEP 2.
4745	SEAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4745.
6370	SEAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS.
4746	THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE SPECIFIED TEST METHOD SENSITIVITY.
4748	THERE SHALL BE NO BUBBLES INDICATIVE OF LEAKAGE,

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4734
PER MIL-STD-202, METHOD 112.	4732
*TEST CONDITION LETTER	
LETTER A.	4737
LIQUID FOR BATH (NAME)	4738
MINIMUM BATH TEMPERATURE (DEGREES CELSIUS)	4739
LETTER B.	6320
LIQUID FOR BATH (NAME)	6321
MINIMUM BATH TEMPERATURE (DEGREES CELSIUS)	6322
LETTER C.	6323
*LEAK RATE SENSITIVITY (ATM CC/SEC)	4741
*TEST PROCEDURE (SELECT ONE)	
TEST PROCEDURE I.	4740

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4734	SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4734.
4732	SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 112 OF MIL-STD-202.
4737	TEST CONDITION LETTER A SHALL APPLY.
4-738	LIQUID FOR BUBBLE TEST BATH SHALL BE 4738.
4739	TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 4739 DEGREES CELSIUS.
6320	TEST CONDITION LETTER B SHALL APPLY.
6321	LIQUID FOR BUBBLE TEST BATH SHALL BE 6321.
6322	TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 6322 DEGREES CELSIUS.
6323	TEST CONDITION LETTER C SHALL APPLY.
4741	LEAK SENSITIVITY RATE SHALL BE 4741 ATM CC/SEC.
4740	PROCEDURE NUMBER I SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
TEST PROCEDURE I (CONT)	
VACUUM PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	4742
(KILOPASCALS)	4736
TEST PROCEDURE II.	6324
BACKFILL PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	6325
(KILOPASCALS)	6326
NUMBER OF PRESSURE CYCLES (QUANTITY)	4749
TEST PROCEDURE III.	6328
GROSS LEAK TEST CONDITION (LETTER)	4750
TEST PROCEDURE IV.	6329
CHAMBER PRESSURE (SELECT ONE)	
(TORR)	4751
(KILOPASCALS)	4735
DURATION OF REDUCED PRESSURE (MINUTES)	4752
GROSS LEAK TEST CONDITION (LETTER)	6330

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4742	VACUUM PRESSURE SHALL BE 4742 POUNDS PER SQUARE INCH.
4736	VACUUM PRESSURE SHALL BE 4736 KILOPASCALS.
6324	PROCEDURE NUMBER II SHALL APPLY.
6325	BACKFILL PRESSURE SHALL BE 6325 POUNDS PER SQUARE INCH,
6326	BACKFILL PRESSURE SHALL BE 6326 KILOPASCALS.
4749	THERE SHALL BE 4749 PRESSURE CYCLE(S).
6328	PROCEDURE NUMBER III SHALL APPLY.
4750	GROSS LEAK TEST CONDITION LETTER 4750 SHALL APPLY.
6329	PROCEDURE NUMBER IV SHALL APPLY.
4751	CHAMBER PRESSURE SHALL BE 4751 TORR.
4735	CHAMBER PRESSURE SHALL BE 4735 KILOPASCALS.
4752	DURATION AT LOW PRESSURE SHALL BE 4752 MINUTE(S).
6330	GROSS LEAK TEST CONDITION LETTER 6330 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
TEST CONDITION LETTER (CONT)	
LETTER D.	6331
ANY SUITABLE MOUNTING METHOD.	4743
LETTER E.	6332
ANY SUITABLE MOUNTING METHOD.	6333
SENSITIVITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	>888
AS FOLLOWS:	2380
MAXIMUM OPENING TIME (SELECT ONE)	
(SECONDS)	1892
(MINUTES)	2382
MAXIMUM CLOSING TIME (SELECT ONE)	
(SECONDS)	1890
(MINUTES)	2384

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH
6331	TEST CONDITION LETTER D SHALL APPLY.	
4743	MOUNTING SHALL BE BY ANY SUITABLE METHOD.	
6332	TEST CONDITION LETTER E SHALL APPLY.	
6333	MOUNTING SHALL BE BY ANY SUITABLE METHOD.	
1888	SENSITIVITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1888.	
2380	SENSITIVITY, THE REQUIREMENTS SHALL BE AS FOLLOWS.	
%892	THE TIME REQUIRED FOR THE SWITCH TO OPEN SHALL BE NOT GREATER THAN 1892 SECOND(S).	
2382	THE TIME REQUIRED FOR THE SWITCH TO OPEN SHALL BE NOT GREATER THAN 2382 MINUTE.	
1890	THE TIME REQUIRED FOR THE SWITCH TO CLOSE SHALL BE NOT GREATER THAN 1890 SECOND(S).	
2384	THE TIME REQUIRED FOR THE SWITCH TO CLOSE SHALL BE NOT GREATER THAN 2384 MINUTE(S).	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SENSITIVITY (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM ACTUATION OR DEACTUATION TIME (SELECT ONE)	
(SECONDS)	1894
(MINUTES)	2386
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1872
PER (DOC DES)	%873
TEST FIXTURE _____	2390
INITIAL FIXTURE TEMPERATURE (SELECT ONE)	
(DEGREES CELSIUS)	2392
(DEGREES FAHRENHEIT)	2394
MINIMUM TEMPERATURE CHANGE RATE (SELECT ONE)	
(DEGREES CELSIUS)	2396
(DEGREES FAHRENHEIT)	2398

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1894	THE TIME REQUIRED FOR THE SWITCH TO ACTUATE OR DEACTUATE WHEN THE SWITCHING POINT IS REACHED SHALL BE NOT GREATER THAN 1894 SECOND(S).
2386	THE TIME REQUIRED FOR THE SWITCH TO ACTUATE OR DEACTUATE WHEN THE SWITCHING POINT IS REACHED SHALL BE NOT GREATER THAN 2386 MINUTE(S).
1872	SENSITIVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1872.
1873	SENSITIVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1873.
2390	TEST FIXTURE SHALL BE 2390.
2392	INITIAL FIXTURE TEMPERATURE SHALL BE 2392 DEGREES CELSIUS.
2394	INITIAL FIXTURE TEMPERATURE SHALL BE 2394 DEGREES FAHRENHEIT.
2396	TEMPERATURE CHANGE RATE SHALL BE NOT LESS THAN 2396 DEGREE(S) CELSIUS PER MINUTE.
239S	TEMPERATURE CHANGE RATE SHALL BE NOT LESS THAN 2398 DEGREE(S) FAHRENHEIT PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SENSITIVITY (CONT)	
AS FOLLOWS: (CONT)	
SECOND OR FINAL FIXTURE TEMPERATURE (SELECT ONE)	
(DEGREES CELSIUS)	2400
(DEGREES FAHRENHEIT)	2402
(CYCLES)	2404
MAXIMUM TIME BETWEEN TEMPERATURE EXPOSURES (SELECT ONE)	
(SECONDS)	2406
(MINUTES)	2408
(HOURS)	2410
SHOCK, HIGH IMPACT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1494
NO EVIDENCE OF PHYSICAL DAMAGE.	1495
NO LAMP IN TEST CIRCUIT SHALL LIGHT.	1550

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2400 SECOND OR FINAL FIXTURE TEMPERATURE SHALL BE 2400 DEGREES CELSIUS.

2402 SECOND OR FINAL FIXTURE TEMPERATURE SHALL BE 2402 DEGREES FAHRENHEIT.

2404 THERE SHALL BE 2404 CYCLE(S) PERFORMED (ON EACH SAMPLE.

2406 THE TIME BETWEEN TEMPERATURE EXPOSURES SHALL BE NOT GREATER THAN 2406 SECOND(S).

2408 THE TIME BETWEEN TEMPERATURE EXPOSURES SHALL BE NOT GREATER THAN 2408 MINUTE.

2410 THE TIME BETWEEN TEMPERATURE EXPOSURES SHALL BE NOT GREATER THAN 2410 HOUR(S).

1494 SHOCK, HIGH IMPACT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1494.

1495 SHOCK, HIGH IMPACT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

1550 NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, HIGH IMPACT (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
MAXIMUM CLOSING OF OPEN CONTACTS (SELECT ONE)	
(MICROSECONDS)	2660
(MILLISECONDS)	2662
MAXIMUM OPENING OF CLOSED CONTACTS (SELECT ONE)	
(MICROSECONDS)	2664
(MILLISECONDS)	2666
SWITCHING POINT (SELECT ONE)	
CONFORM TO CALIBRATION REQUIREMENTS.	2668
MAXIMUM CHANGE (DEGREES CELSIUS)	2670
MAXIMUM CHANGE (DEGREES FAHRENHEIT)	2672
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1486
PER MIL-STD-202, METHOD 207.	1482

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2660	THE CLOSING OF OPEN CONTACTS SHALL BE NOT GREATER THAN 2660 MICROSECOND(S).
2662	THE CLOSING OF OPEN CONTACTS SHALL BE NOT GREATER THAN 2662 MILLISECOND(S).
2664	THE OPENING OF CLOSED CONTACTS SHALL BE NOT GREATER THAN 2664 MICROSECOND(S),
2666	THE OPENING OF CLOSED CONTACTS SHALL BE NOT GREATER THAN 2666 MILLISECOND(S).
2668	UNITS SHALL CONFORM TO CALIBRATION REQUIREMENTS AFTER TESTS
2670	THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 2670 DEGREE(S) CELSIUS.
2672	THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 2672 DEGREE(S) FAHRENHEIT.
1486	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1486.
1482	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 207 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, HIGH IMPACT (CONT)	
PER MIL-STD-202, METHOD 207. (CONT)	
*MOUNTING FIXTURE (SELECT ONE)	
FIGURE NUMBER FROM METHOD 207 OF MIL-STD-202 (NUMBER)	1488
ANY SUITABLE MOUNTING FIXTURE.	1478
MOUNTING FIXTURE PER DOCUMENT (DOC DES)	1468
MONITOR CONTACT CHATTER PER METHOD 310 OF MIL-STD-202	
*TEST CIRCUIT (LETTER)	1487
*TEST CONDITION (LETTER)	1479
PERCENT RATED LOAD APPLIED (PERCENT)	6203
LOAD (TYPE)	2674
SHOCK, SPECIFIED PULSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1508
NO EVIDENCE OF PHYSICAL DAMAGE.	1509

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1488	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH FIGURE 1488 OF METHOD 207 OF MIL-STD-202.
1478	THE MOUNTING FIXTURE SHALL BE ANY SUITABLE MOUNTING FIXTURE.
1468	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH 1468.
1487	MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1487 SHALL APPLY.
1479	TEST CONDITION LETTER 1479 OF METHOD 31O OF MIL-STD-202 SHALL APPLY.
6203	THE ELECTRICAL LOAD SHALL BE 6203 PERCENT OF THE RATED LOAD.
2674	THE LOAD TYPE SHALL BE 2674.
1508	SHOCK, SPECIFIED PULSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1508.
1509	SHOCK, SPECIFIED PULSE, THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, SPECIFIED PULSE (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
NO LAMP IN TEST CIRCUIT SHALL LIGHT.	1551
MAXIMUM CLOSING OF OPEN CONTACTS (SELECT ONE)	
(MICROSECONDS)	2680
(MILLISECONDS)	2682
MAXIMUM OPENING OF CLOSED CONTACTS (SELECT ONE)	
(MICROSECONDS)	2684
(MILLISECONDS)	2686
SWITCHING POINT (SELECT ONE)	
CONFORM TO CALIBRATION REQUIREMENTS.	2688
MAXIMUM CHANGE (DEGREES CELSIUS)	2500
MAXIMUM CHANGE (DEGREES FAHRENHEIT)	2690
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1502
PER MIL-STD-202, METHOD 213.	1500

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1551	NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.
2680	THE CLOSING OF OPEN CONTACTS SHALL BE NOT GREATER THAN 2680 MICROSECOND(S).
2682	THE CLOSING OF OPEN CONTACTS SHALL BE NOT GREATER THAN 2682 MILLISECOND(S).
2684	THE OPENING OF CLOSED CONTACTS SHALL BE NOT GREATER THAN 2684 MICROSECOND(S).
2686	THE OPENING OF CLOSED CONTACTS SHALL BE NOT GREATER THAN 2686 MILLISECOND(S).
2688	UNITS SHALL CONFORM TO CALIBRATION REQUIREMENTS AFTER TEST.
2500	THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 2500 DEGREE(S) CELSIUS.
2690	THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 2690 DEGREE(S) FAHRENHEIT.
1502	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1502.
1500	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 213 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, SPECIFIED PULSE (CONT)	
PER MIL-STD-202, METHOD 213. (CONT)	
*TEST CONDITION (LETTER)	1504
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	4686
NORMAL MOUNTING METHOD.	4685
MOUNT PER DOCUMENT (DOC DES)	4684
MONITOR CONTACT CHATTER PER METHOD 310 OF MIL-STD-202.	
*TEST CIRCUIT (LETTER)	1503
*TEST CONDITION (LETTER)	1499
PERCENT RATED LOAD APPLIED (PERCENT)	6204
LOAD (TYPE)	2692
SHORT CIRCUIT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1920
NO CONTACT WELDING QR STICKING.	1922
MECHANICALLY AND ELECTRICALLY OOERATIVE	1924

Source: https://assist.dla.mil -- Downloaded: 2026t0-26T07:24Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
1504	TEST CONDITION LETTER 1504 SHALL APPLY.
4686	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4685	MOUNTING SHALL BE BY THE NORMAL METHOD.
4684	MOUNTING SHALL BE IN ACCORDANCE WITH 4684.
1503	MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT 1503 SHALL APPLY.
1499	TEST CONDITION LETTER 1499 OF METHOD 310 OF MIL-STD-202 SHALL APPLY.
6204	THE ELECTRICAL LOAD SHALL BE 6204 PERCENT OF THE RATED LOAD.
2692	THE LOAD TYPE SHALL BE 2692.
1920	SHORT CIRCUIT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1920.
1922	SHORT CIRCUIT. THERE SHALL BE NO EVIDENCE OF WELDING OR STICKING OF CONTACTS.
1924	THE SWITCH SHALL BE MECHANICALLY AND ELECTRICALLY OPERATIVE AFTER TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHORT CIRCUIT (CONT)	
NO CONTACT WELDING OR STICKING. (CONT)	
MAXIMUM CONTACT RESISTANCE (MILLIOHMS)	1926
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1902
PER (DOC DES)	2420
APPLIED CURRENT (AMPERES)	1906
APPLIED VOLTAGE (VOLTS DC)	2422
(CYCLES)	1916
SOLDERABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4674
NO EVIDENCE OF PHYSICAL DAMAGE.	4675
MEET EVALUATION CRITERIA SPECIFIED IN METHOD 208 OF MIL-STD-202.	4672
TEST METHOD (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4662

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1926	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1926 MILLIOHM(S) AFTER TEST.
1902	SHORT CIRCUIT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1902.
2420	SHORT CIRCUIT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2420.
1906	THE APPLIED TEST CURRENT SHALL BE 11906 AMPERE(S).
2422	THE APPLIED VOLTAGE SHALL BE 2422 VOLT(S) DCo
1916	THE NUMBER OF TEST CYCLES SHALL BE 1916.
4674	SOLDERABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4674.
4675	SOLDERABILITY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4672	THE RESULTS OF THE SOLDERABILITY TEST SHALL BE IN ACCORDANCE NITH THE ACCEPTANCE CRITERIA OF METHOD 208 OF MIL-STD-202.
4662	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4662.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SOLDERABILITY (CONT)	
TEST METHOD (SELECT ONE) (CONT)	
PER MIL-STD-202, METHOD 208.	4683
NUMBER OF TERMINALS TO BE TESTED (QUANTITY)	4666
DEPTH OF IMMERSION (SELECT ONE)	
(INCHES)	4667
(MILLIMETERS)	4663
DISTANCE WRAP WIRE APPLIED FROM BODY (SELECT ONE)	
(INCHES)	4664
(MILLIMETERS)	4665
SPECIAL PREPARATION PERMITTED.	6205
TEMPERATURE ANTICIPATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1938
NO OPERATION.	1940
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1932

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4683	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 208 OF MIL-STD-202.
4666	4666 TERMINATION(S) PER UNIT SHALL BE TESTED.
4667	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4667 INCH(S).
4663	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4663 MILLIMETER(S).
4664	THE WRAP WIRE SHALL BE 4664 INCH(S) FROM THE BODY.
4665	THE WRAP WIRE SHALL BE 4665 MILLIMETER(S) FROM THE BODY.
6205	SPECIAL PREPARATION SHALL BE PERMITTED.
1938	TEMPERATURE ANTICIPATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1938.
1940	TEMPERATURE ANTICIPATION. THE SWITCH SHALL NOT OPERATE.
1932	TEMPERATURE ANTICIPATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1932.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE ANTICIPATION (CONT)	
TEST METHODS (SELECT ONE) (CONT)	
PER MIL-S-24236.	1934
INITIAL STABILIZATION TEMPERATURE (SELECT ONE)	
(DEGREES CELSIUS)	2430
(DEGREES FAHRENHEIT)	2432
DURATION AT STABILIZATION TEMPERATURE (HOURS)	2434
FINAL TEMPERATURE (SELECT ONE)	
(DEGREES CELSIUS)	2436
TOLERANCE (DEGREES CELSIUS)	2438
(DEGREES FAHRENHEIT;	2440
TOLERANCE (DEGREES FAHRENHEIT)	2442
MAXIMUM TRANSFER TIME (MINUTES)	2444
AIR VELOCITY (SELECT ONE)	
(FEET PER SECOND)	2446

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1934 TEMPERATURE ANTICIPATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-24236.

2430 UNITS SHALL BE STABILIZED AT A TEMPERATURE OF 2430 DEGREES CELSIUS.

2432 UNITS SHALL BE STABILIZED AT A TEMPERATURE OF 2432 DEGREES FAHRENHEIT.

2434 DURATION AT STABILIZATION TEMPERATURE SHALL BE 2434 HOUR(S).

2436 FINAL TEST TEMPERATURE SHALL BE 2436 DEGREES CELSIUSo

2438 FINAL TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2438 DEGREE(S) CELSIUS.

2440 FINAL TEST TEMPERATURE SHALL BE 2440 DEGREES FAHRENHEIT.

2442 FINAL TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2442 DEGREE(S) FAHRENHEIT.

2444 THE TIME FOR TRANSFER BETWEEN TEMPERATURES SHALL BE NOT GREATER THAN 2444 MINUTE(S).

2446 THE FINAL TEST CHAMBER SHALL HAVE AN AIR VELOCITY OF NOT LESS THAN 2446 FEET PER SECOND.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE ANTICIPATION (CONT)	
AIR VELOCITY (SELECT ONE) (CONT)	
(METERS PER SECOND)	2448
MINIMUM FINAL TEMPERATURE DURATION (MINUTES)	2450
TEMPERATURE, HIGH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6228
NO EVIDENCE OF PHYSICAL DAMAGE.	6229
SWITCHING POINT (SELECT ONE)	
CONFORM TO CALIBRATION REQUIREMENTS.	2510
MAXIMUM CHANGE (DEGREES CELSIUS)	2512
MAXIMUM CHANGE (DEGREES FAHRENHEIT)	2514
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6217
PER MIL-STD-810, METHOD 501.	6218

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2448 THE FINAL TEST CHAMBER SHALL HAVE AN AIR VELOCITY OF NOT LESS THAN 2448 METER(S) PER SECOND.

2450 THE DURATION AT THE FINAL TEMPERATURE SHALL BE NOT LESS THAN 2450 MINUTE(S).

6228 TEMPERATURE, HIGH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6228.

6229 TEMPERATURE, HIGH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

2510 UNITS SHALL CONFORM TO CALIBRATION REQUIREMENTS AFTER TEST.

2512 THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 2512 DEGREE(S) CELSIUS.

2514 THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 2514 DEGREE(S) FAHRENHEIT.

6217 TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6217.

6218 TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 501 OF MIL-STD-810.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, HIGH (CONT)	
PER MIL-STD-810, METHOD 501. (CONT)	
*PROCEDURE (ROMAN NUMERAL)	6219
STORAGE TEMPERATURE (SELECT ONE)	
(DEGREES CELSIUS)	6220
(DEGREES FAHRENHEIT)	2515
STORAGE DURATION (HOURS)	6221
HIGHEST OPERATING TEMPERATURE (SELECT ONE)	
(DEGREES CELSIUS)	6222
(DEGREES FAHRENHEIT)	2516
OPERATION TIME (SELECT ONE)	
(MINUTES)	6224
(HOURS)	6225
ALTERNATE TEMPERATURE FOR OPERATION (SELECT ONE)	
(DEGREES CELSIUS)	2517
(DEGREES FAHRENHEIT)	2518

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

62119 PROCEDURE NUMBER 6219 SHALL APPLY.

6220 STORAGE TEMPERATURE SHALL BE 6220 DEGREES CELSIUS.

2515 STORAGE TEMPERATURE SHALL BE 2515 DEGREES FAHRENHEIT.

6221 STORAGE DURATION SHALL BE 6221 HOUR(S).

6222 HIGHEST OPERATING TEMPERATURE SHALL BE 6222 DEGREES CELSIUS.

2516 HIGHEST OPERATING TEMPERATURE SHALL BE 2516 DEGREES FAHRENHEIT.

6224 OPERATING TIME SHALL BE 6224 MINUTE(S).

6225 OPERATING TIME SHALL BE 6225 HOUR(S).

2517 TO COMPLETE OPERATION CYCLE, LOWER TEMPERATURE TO 2517 DEGREES CELSIUS.

2518 TO COMPLETE OPERATION CYCLE, LOWER TEMPERATURE TO 2518 DEGREES FAHRENHEIT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, LOW	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	6318
NO EVIDENCE OF PHYSICAL DAMAGE.	6319
SWITCHING POINT (SELECT ONE)	
CONFORM TO CALIBRATION REQUIREMENTS.	2520
MAXIMUM CHANGE (DEGREES CELSIUS)	2522
MAXIMUM CHANGE (DEGREES FAHRENHEIT)	2524
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	6231
PER MIL-STD-810, METHOD 502.	6232
STORAGE TEMPERATURE (SELECT ONE)	
(DEGREES CELSIUS)	6234
(DEGREES FAHRENHEIT)	2525
STORAGE DURATION (HOURS)	6235

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6318	TEMPERATURE, LOW. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6318.
6319	TEMPERATURE, LOW. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2520	UNITS SHALL CONFORM TO CALIBRATION REQUIREMENTS AFTER TEST.
2522	THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 2522 DEGREE(S) CELSIUS.
2524	THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 2524 DEGREE(S) FAHRENHEIT.
6231	TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6231.
6232	TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 502 OF MIL-STD-810.
6234	STORAGE TEMPERATURE SHALL BE 6234 DEGREES CELSIUS.
2525	STORAGE TEMPERATURE SHALL BE 2525 DEGREES FAHRENHEIT.
6235	STORAGE DURATION SHALL BE 6235 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, LOW (CONT)	
PER MIL-STD-810, METHOD 502. (CONT)	
LOWEST OPERATING TEMPERATURE (SELECT ONE)	
(DEGREES CELSIUS)	6236
(DEGREES FAHRENHEIT)	2526
CHAMBER AIR VELOCITY (SELECT ONE)	
(FEET PER SECOND)	6237
(METERS PER SECOND)	6238
OPERATION TIME (SELECT ONE)	
(MINUTES)	6315
(HouRS)	6316
ALTERNATE TEMPERATURE FOR OPERATING (SELECT ONE)	
(DEGREES CELSIUS)	2527
(DEGREES FAHRENHEIT)	2528
TERMINAL STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1418

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6236	LOWEST OPERATING TEMPERATURE SHALL BE 6236 DEGREES CELSIUS.
2526	LOWEST OPERATING TEMPERATURE SHALL BE 2526 DEGREES FAHRENHEIT.
6237	CHAMBER AIR VELOCITY SHALL BE 6237 FEET PER SECOND.
6238	CHAMBER AIR VELOCITY SHALL BE 6238 METERS PER SECOND.
6315	OPERATING TIME SHALL BE 6315 MTNUTE(S).
6316	OPERATING TIME SHALL BE 6316 HOUR(S).
2527	TO COMPLETE OPERATION CYCLE, RAISE TEMPERATURE TO 2527 DEGREES CELSIUS.
2528	TO COMPLETE OPERATION CYCLE, RAISE TEMPERATURE TO 2528 DEGREES FAHRENHEIT.
1418	TERMINAL STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1418.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINAL STRENGTH (CONT)	
REQUIREMENTS (SELECT ONE) (CONT)	
NO EVIDENCE OF PHYSCIAL DAMAGE.	1433
CONFORM TO CALIBRATION REQUIREMENTS.	2700
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1410
PER MIL-STD-202, METHOD 211.	1375
*TEST CONDITIONS	
TEST CONDITION A, APPLIED FORCE (SELECT ONE)	
(POUNDS)	1411
(NEWTONS)	1419
TEST CONDITION B, BENDS (NUMBER)	1412
TEST CONDITION C, LOAD (SELECT ONE)	
(POUNDS)	1413
(KILOGRAMS)	1420

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1433	TERMINAL STRENGTH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2700	UNITS SHALL CONFORM TO CALIBRATION REQUIREMENTS AFTER TESTS
1410	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1410.
1375	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 211 OF MIL-STD-202.
1411	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1411 POUND(S).
1419	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1419 NEWTON(S).
1412	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION B. THERE SHALL BE 1412 BEND(S).
1413	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1413 POUND(S).
1420	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1420 KILOGRAM.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINAL STRENGTH (CONT)	
*TEST CONDITIONS (CONT)	
TEST CONDITON D.	1414
TEST CONDITON E. TORQUE (SELECT ONE)	
(POUND-INCHES)	1416
(NEWTON METERS)	1421
THERMAL SHOCK (TEMPERATURE CYCLING)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ———	4722
NO EVIDENCE OF PHYSCIAL DAMAGE.	4723
SWITCHING POINT (SELECT ONE)	
CONFORM TO CALIBRATION REQUIREMENTS.	2710
MAXIMUM CHANGE (DEGREES CELSIUS)	2712
MAXIMUM CHANGE (DEGREES FAHRENHEIT)	2714
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ———	4713

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1414	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION D.
1416	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1416 POUND-INCH(S).
1421	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1421 NEWTON METER(S).
4722	THERMAL SHOCK (TEMPERATURE CYCLING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4722.
4723	THERMAL SHOCK (TEMPERATURE CYCLING). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2710	UNITS SHALL CONFORM TO CALIBRATION REQUIREMENTS AFTER TEST.
2712	THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 2712 DEGREE(S) CELSIUS.
2714	THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 2714 DEGREE(S) FAHRENHEIT.
4713	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4713.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THERMAL SHOCK (TEMPERATURE CYCLING).(CONT)	
TEST METHODS (SELECT ONE) (CONT)	
PER MIL-STD-202, METHOD 107.	4714
*TEST CONDITON (LETTER)	4715
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4719
Vibration HIGH FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ———	1455
NO EVIDENCE OF PHYSICAL DAMAGE.	1456
NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.	1552
MAXIMUM CLOSING OF OPEN CONTACTS (SELECT ONE)	
(MICROSECONDS)	2720
(MILLISECONDS)	2722
MAXIMUM OPENING OF CLOSED CONTACTS (SELECT ONE)	
(MICROSECONDS)	2724
(MILLISECONDS)	2726

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4714	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 107 OF MIL-STD-202.
4715	TEST CONDITION LETTER 4715 SHALL APPLY.
4719	MOUNTING SHALL BE IN ACCORDANCE WITH 4719.
1455	VIBRATION, HIGH FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1455.
1456	VIBRATION, HIGH FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1552	NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.
2720	THE CLOSING OF OPEN CONTACTS SHALL BE NOT GREATER THAN 2720 MICROSECOND(S).
2722	THE CLOSING OF OPEN CONTACTS SHALL BE NOT GREATER THAN 2722 MILLISECOND(S).
2724	THE OPENING OF CLOSED CONTACTS SHALL BE NOT GREATER THAN 2724 MICROSECOND(S).
2726	THE OPENING OF CLOSED CONTACTS SHALL BE NOT GREATER THAN 2726 MILLISECOND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, HIGH FREQUENCY (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
SWITCHING POINT (SELECT ONE)	
CONFORM TO CALIBRATION REQUIREMENTS.	2728
MAXIMUM CHANGE (DEGREES CELSIUS)	2730
MAXIMUM CHANGE (DEGREES FAHRENHEIT)	2732
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1446
PER MIL-STD-202, METHOD 204.	1447
*TEST CONDITION (LETTER)	1448
PERCENT RATED LOAD APPLIED (PERCENT)	6200
LOAD (TYPE)	2734
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4709
NORMAL MOUNTING METHOD.	4708
MOUNT PER DOCUMENT (DOC DES)	4707
METHOD OF DETERMINING MECHANICAL RESONANCE (SELECT ONE)	
VISUALLY BY MEANS OF A STROBOTAC.	1533

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2728	UNITS SHALL CONFORM TO CALIBRATION REQUIREMENTS AFTER TEST.
2730	THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 2730 DEGREE(S) CELSIUS.
2732	THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 2732 DEGREE(S) FAHRENHEIT.
1446	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1446.
1447	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 204 OF MIL-STD-202.
1448	TEST CONDITION LETTER 1448 SHALL APPLY,
6200	THE LOAD SHALL BE 6200 PERCENT OF THE RATED LOAD.
2734	THE LOAD TYPE SHALL BE 2734.
4709	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4708	MOUNTING SHALL BE BY THE NORMAL METHOD.
4707	MOUNTING SHALL BE IN ACCORDANCE WITH 4707.
1533	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE VISUALLY BY MEANS OF A STROBOTAC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, HIGH FREQUENCY (CONT)	
METHOD OF DETERMINING MECHANICAL RESONANCE (SELECT ONE) (CONT)	
ELECTRICAL OUTPUT INDICATORS.	1534
MONITOR CONTACT CHATTER IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202.	
*TEST CIRCUIT (LETTER)	1442
*TEST CONDITION (LETTER)	1444
VIBRATION, LOW FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ———	1475
NO EVIDENCE OF PHYSICAL DAMAGE.	1476
NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.	1553
MAXIMUM CLOSING OF OPEN CONTACTS (SELECT ONE)	
(MICROSECONDS)	2740
(MILLISECONDS)	2742

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1534	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE BY ELECTRICAL OUTPUT INDICATORS.
1442	MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1442 SHALL APPLY.
1444	TEST CONDITION LETTER 1444 OF METHOD 310 OF MIL-STD-202 SHALL APPLY.
1475	VIBRATION, LOW FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3475.
1476	VIBRATION, LOW FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1553	NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.
2740	THE CLOSING OF OPEN CONTACTS SHALL BE NOT GREATER THAN 2740 MICROSECOND(S).
2742	THE CLOSING OF OPEN CONTACTS SHALL BE NOT GREATER THAN 2742 MILLISECOND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATIONS LOW FREQUENCY (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
MAXIMUM OPENING OF CLOSED CONTACTS (SELECT ONE)	
(MICROSECONDS)	2744
(MILLISECONDS)	2746
SWITCHING POINT (SELECT ONE)	
CONFORM TO CALIBRATION REQUIREMENTS.	2748
MAXIMUM CHANGE (DEGREES CELSIUS)	2750
MAXIMUM CHANGE (DEGREES CELSIUS)	2752
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1466
PER MIL-STD-202, METHOD 201.	1467
DURATION OF VIBRATION PER AXIS (HOURS)	1470
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4731
NORMAL MOUNTING METHOD.	4730
MOUNT PER DOCUMENT (DOC DES)	4729

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2744 THE OPENING OF CLOSED CONTACTS SHALL BE NOT GREATER THAN 2744 MICROSECOND(S).

2746 THE OPENING OF CLOSED CONTACTS SHALL BE NOT GREATER THAN 2746 MILLISECOND(S).

2748 UNITS SHALL CONFORM TO CALIBRATION REQUIREMENTS AFTER TEST.

2750 THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 2750 DEGREE(S) CELSIUS.

2752 THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 2752 DEGREE(S) FAHRENHEIT.

1466 VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1466.

1467 VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 201 OF MIL-STD-202.

1470 DURATION OF TEST SHALL BE 1470 HOUR(S) PER AXIS.

4731 MOUNTING SHALL BE BY ANY SUITABLE METHOD.

4730 MOUNTING SHALL BE BY THE NORMAL METHOD.

4729 MOUNTING SHALL BE IN ACCORDANCE WITH 4729.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY (CONT)	
PER MIL-STD-202, METHOD 201. (CONT)	
DIRECTION OF MOTION	
PARALLEL TO LONGITUDINAL AXIS.	1535
PERPENDICULAR TO LONGITUDINAL AXIS.	1536
ON THE CENTERLINE OF MOST SENSITIVE AXIS.	4979
90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.	4978
THREE MUTUALLY PERPENDICULAR DIRECTIONS.	1537
MONITOR CONTACT CHATTER IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202.	
*TEST CIRCUIT (LETTER)	1491
*TEST CONDITION (LETTER)	1492
PERCENT RATED LOAD APPLIED (PERCENT)	6201
LOAD (TYPE)	2754
VIBRATION, RANDOM	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1435

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1535 THE DIRECTION OF MOTION SHALL BE PARALLEL TO THE LONGITUDINAL AXIS.

1536 THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE LONGITUDINAL AXIS.

4979 THE DIRECTION OF MOTION SHALL BE ON THE CENTERLINE OF THE MOST SENSITIVE AXIS.

4978 THE DIRECTION OF MOTION SHALL BE 90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.

1537 THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUALLY PERPENDICULAR DIRECTIONS.

1491 MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1491 SHALL APPLY.

1492 TEST CONDITION LETTER 1492 OF METHOD 310 OF MIL-STD-202 SHALL APPLY.

6201 THE LOAD SHALL BE 6201 PERCENT OF THE RATED LOAD.

2754 THE LOAD TYPE SHALL BE 2754.

1435 VIBRATION, RANDOM. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1435.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
REQUIREMENTS (SELECT ONE) (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE.	1436
MAXIMUM CLOSING OF OPEN CONTACTS (SELECT ONE)	
(MICROSECONDS)	2760
(MILLISECONDS)	2762
MAXIMUM OPENING OF CLOSED CONTACTS (SELECT ONE)	
(MICROSECONDS)	2764
(MILLISECONDS)	2766
SWITCHING POINT (SELECT ONE)	
CONFORM TO CALIBRATION REQUIREMENTS.	2768
MAXIMUM CHANGE (DEGREES CELSIUS)	2770
MAXIMUM CHANGE (DEGREES FAHRENHEIT)	2772
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1436 VIBRATION, RANDOM. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

2760 THE CLOSING OF OPEN CONTACTS SHALL BE NOT GREATER THAN 2760 MICROSECOND(S).

2762 THE CLOSING OF OPEN CONTACTS SHALL BE NOT GREATER THAN 2762 MILLISECOND(S).

2764 THE OPENING OF CLOSED CONTACTS SHALL BE NOT GREATER THAN 2764 MICROSECOND(S).

2766 THE OPENING OF CLOSED CONTACTS SHALL BE NOT GREATER THAN 2766 MILLISECOND(S).

2768 UNITS SHALL CONFORM TO CALIBRATION REQUIREMENTS AFTER TEST.

2770 THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 2770 DEGREE(S) CELSIUS.

2772 THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 2772 DEGREE(S) FAHREHEIT.

1426 VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1426.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
TEST METHODS (SELECT ONE) (CONT)	
PER MIL-STD-202, METHOD 214.	1427
*TEST CONDITION (ROMAN NUMERAL AND LETTER)	1428
*DURATION OF APPLICATION (SELECT ONE)	
(MINUTES)	1438
(HOURS)	1431
MONITORING INSTRUMENTATION OF EXCITATION (SELECT ONE)	
ANY SUITABLE SYSTEM.	1452
CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.	1453
CALIBRATED OSCILLOSCOPE-	1459
NUMBER OF VIBRATION MONITORING TEST POINTS (QUANTITY)	1430
LOCATION OF MONITORING POINTS (SELECT ONE)	
ANY SUITABLE LOCATION.	1439

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1427	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 214 OF MIL-STD-202.
1428	TEST CONDITION NUMBER AND LETTER 1428 SHALL APPLY.
1438	THE DURATION OF THE TEST SHALL BE 1438 MINUTE(S).
1431	THE DURATION OF THE TEST SHALL BE 1431 HOUR(S).
1452	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE ANY SUITABLE INSTRUMENTATION SYSTEM.
1453	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECOR ER.
1459	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CLAIBRATED OSCILLOSCOPE.
1430	THERE SHALL BE 1430 VIBRATION MONITORING POINT(S).
1439	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE ANY SUITABLE LOCATION,

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
LOCATION OF MONITORING POINTS (SELECT ONE) (CONT)	
AS CLOSE AS PRACTICAL TO TEST SPECIMEN.	1462
MONITOR CONTACT CHATTER IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202.	
*TEST CIRCUIT (LETTER)	1402
*TEST COND1TION (LETTER)	1382
PERCENT OF RATED LOAD APPLIED (PERCENT)	4678
LOAD (TYPE)	2774
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4977
NORMAL MOUNTING METHOD.	4976
MOUNT PER DOCUMENT (DOC DES)	4975
WATERPROOFNESS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1962
AS FOLLOWS:	2460

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:24Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
1462	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE AS CLOSE AS PRACTICAL TO THE TEST SPECIMEN(S).
1402	MONITORING DURING THE TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1402 SHALL APPLY.
1382	TEST CONDITION LETTER 1382 IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202 SHALL APPLY.
4678	THE LOAD SHALL BE 4678 PERCENT OF THE RATED LOAD.
2774	THE LOAD TYPE SHALL BE 2774.
4977	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4976	MOUNTING SHALL BE BY THE NORMAL METHOD.
4975	MOUNTING SHALL BE IN ACCORDANCE WITH 4975.
1962	WATERPROOFNESS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1962
2460	WATERPROOFNESS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WATERPROOFNESS (CONT)	
AS FOLLOWS: (CONT)	
NO EVIDENCE OF LEAKAGE.	1964
NO DEGRADATION OF PERFORMANCE.	1966
SWITCHING POINT (SELECT ONE)	
CONFORM TO CALIBRATION REQUIREMENTS.	1968
MAXIMUM CHANGE (DEGREES CELSIUS)	1970
MAXIMUM CHANGE (DEGREES FAHRENHEIT)	2462
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1952
PER MIL-E-13856.	1954
TYPE (DESIGNATION)	1956
CLASS (DESIGNATION)	1958
MOUNTING HARDWARE (SEE TABLE VIII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VIII IS USED.	
WORKMANSHIP	
(DOC DES)	6870

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1964	THERE SHALL BE NO EVIDENCE OF LEAKAGE.
1966	THERE SHALL BE NO DEGRADATION OF PERFORMANCE.
1968	UNITS SHALL CONFORM TO CALIBRATION REQUIREMENTS AFTER TEST.
1970	THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 1970 DEGREE(S) CELSIUS.
2462	THE CHANGE IN SWITCHING POINT SHALL BE NOT GREATER THAN 2462 DEGREE(S) FAHRENHEIT.
1952	WATERPROOFNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1952. WATERPROOFNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-E-13856.
1956	THE COMPONENT CLASSIFICATION SHALL BE TYPE 1956.
1958	THE COMPONENT CLASSIFICATION SHALL BE CLASS 1958.
	MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADDITIONAL REQUIREMENTS	
A_____	7001
B_____	7002
C_____	7003
D_____	7004
E_____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629
ADDITIONAL PART MARKING	
A_____	6991
B_____	6992
C_____	6993
D_____	6994
E_____	6995
DEFINITION OF HERMETIC SEALING	
NOTE: AUTOMATIC WHEN CODES ARE USED TO REQUIRE HERMETIC SEALING.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(c) 7003.
7004	(D) 7004.
7005	(E) 7005.
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.
	ADDITIONAL PART MARKING.
6998	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.
	DEFINITION OF HERMETIC SEALING. FOR THE PURPOSE OF THIS DOCUMENT, A HERMETICALLY-SEALED ITEM IS ONE IN WHICH THE ELEMENT IS CONTAINED WITHIN A SEALED ENCLOSURE OF CERAMIC, GLASS OR METAL, OR A COMBINATION THEREOF, WHERE SEALING IS ACCOMPLISHED BY MATERIAL FUSION, WELDING, BRAZING OR SOLDERING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI

(Project EDS-A324)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX A


ILLUSTRATION

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

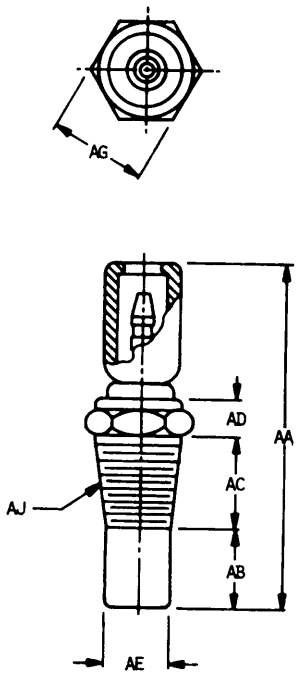


017-01-1

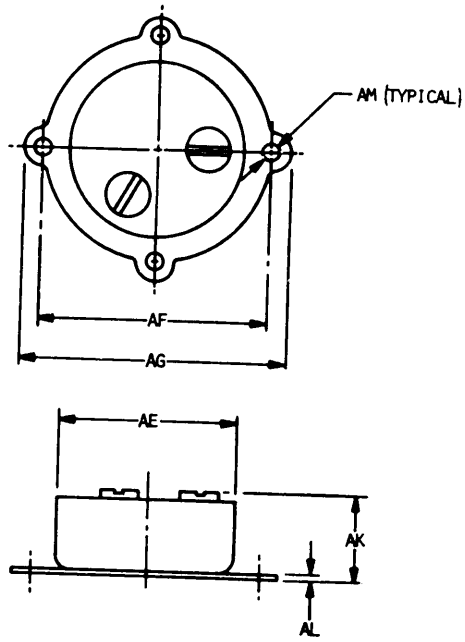


017-01-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

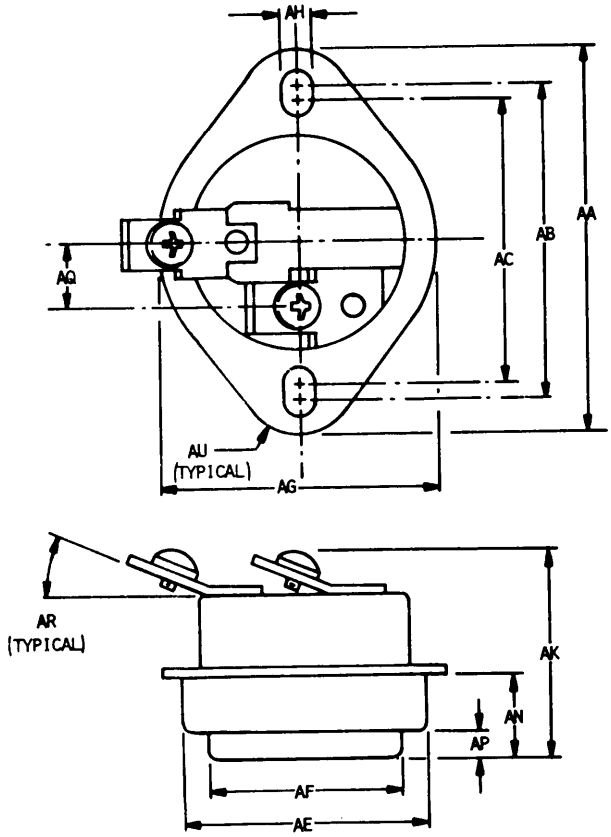


017-01-3

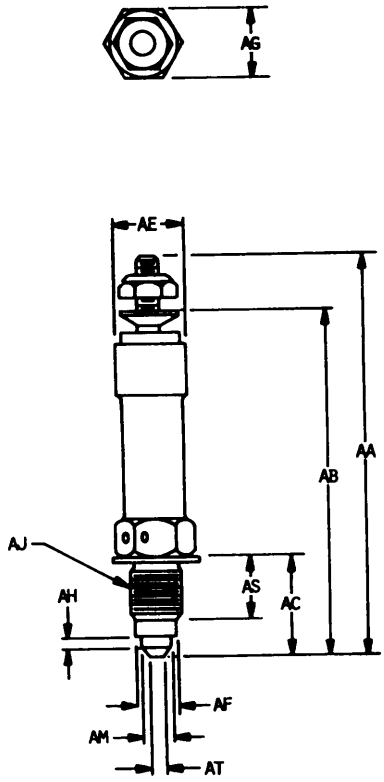


017-01-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

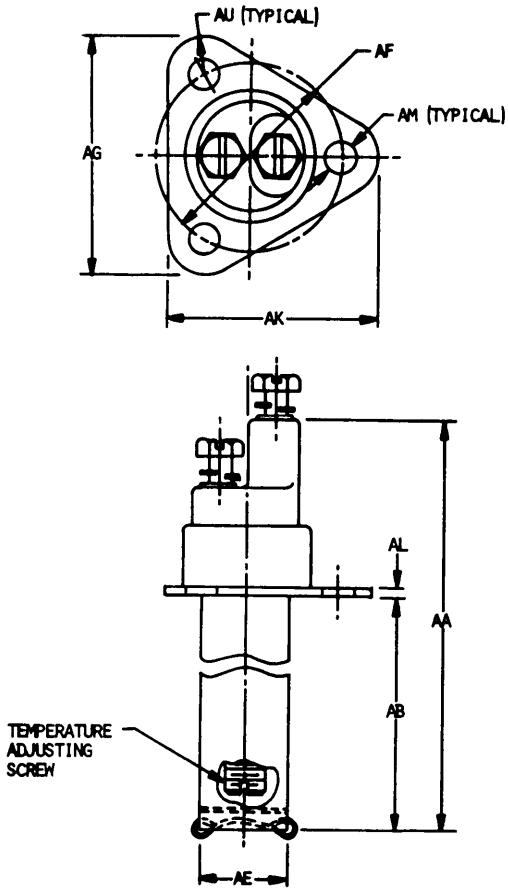


017-01-5

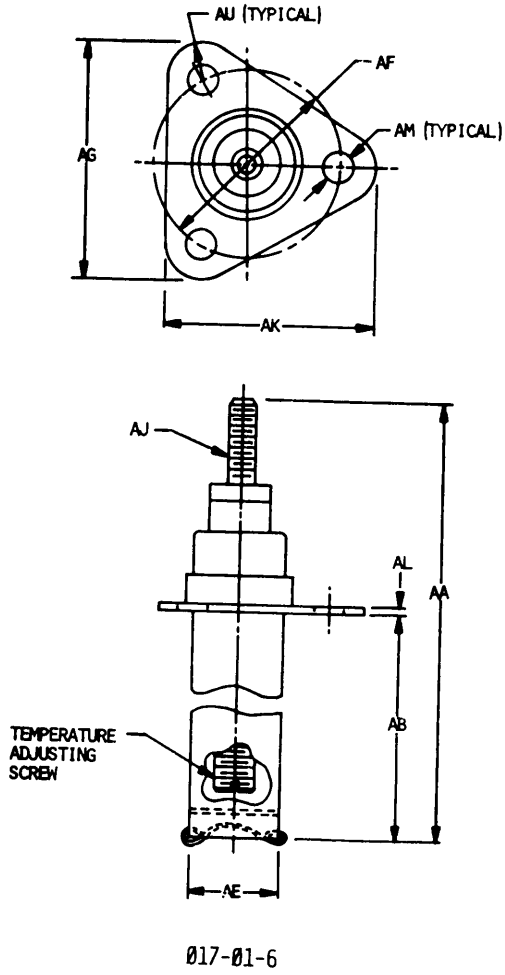


017-01-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

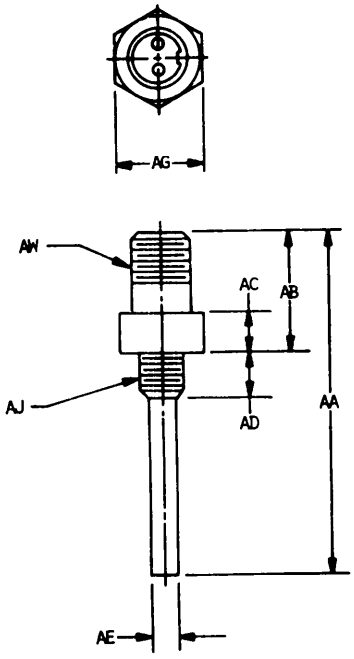


017-01-7

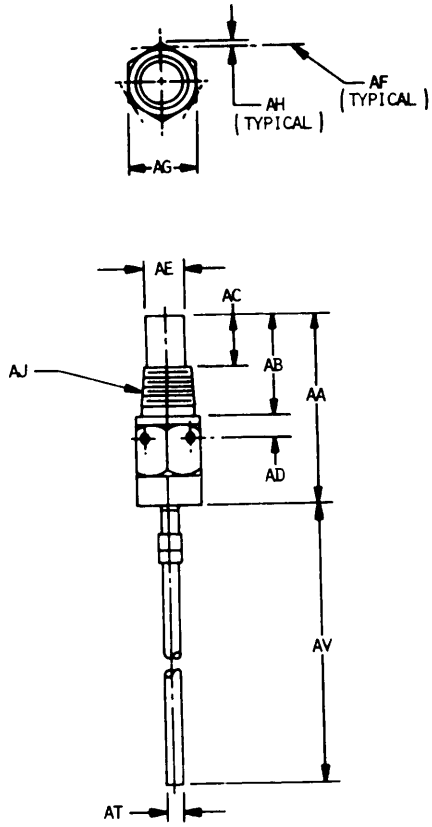


017-01-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

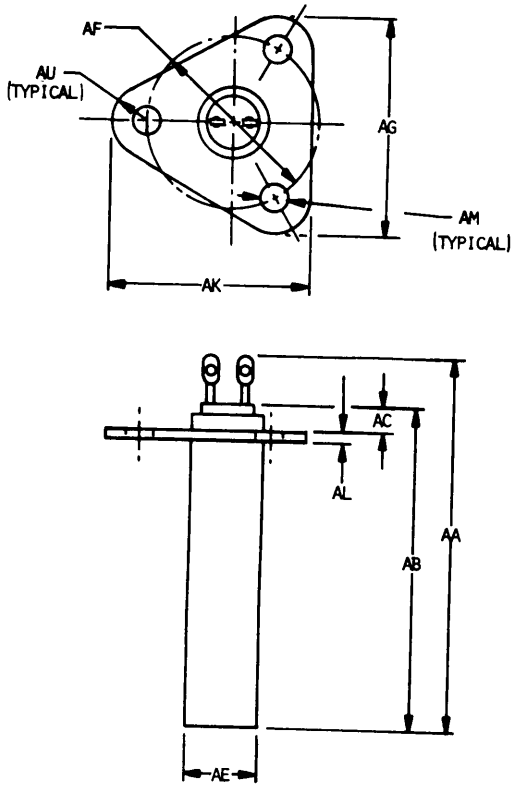


017-01-9

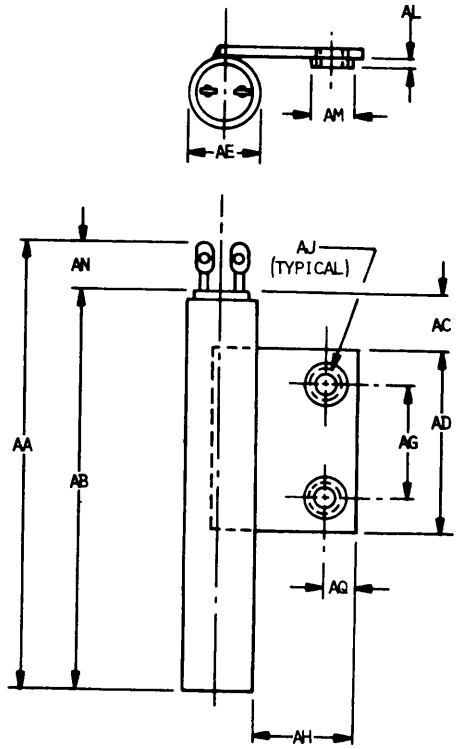


017-01-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

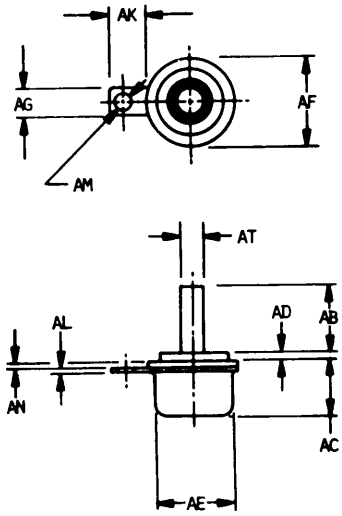


017-01-11

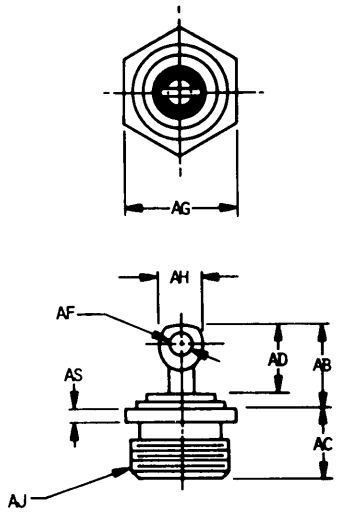


017-01-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

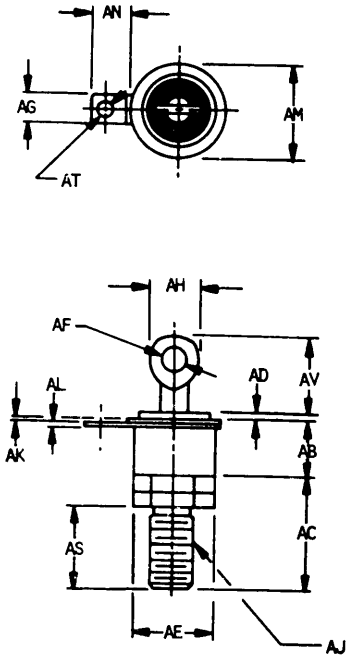


017-01-13

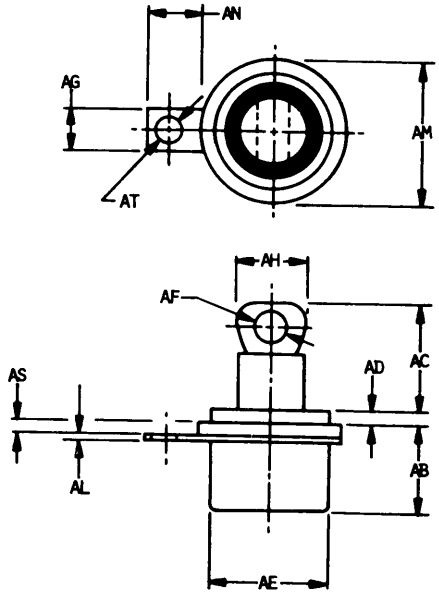



017-01-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

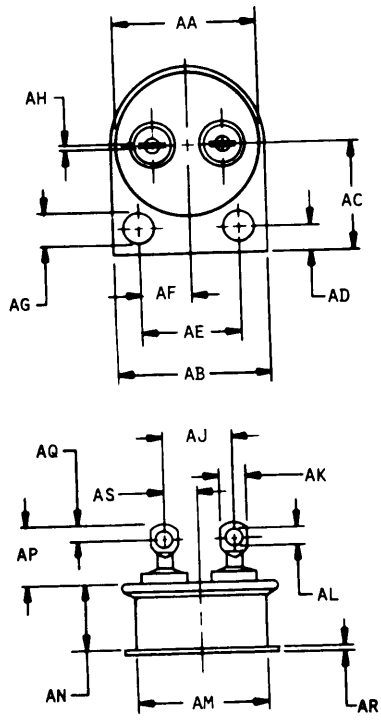


017-01-15

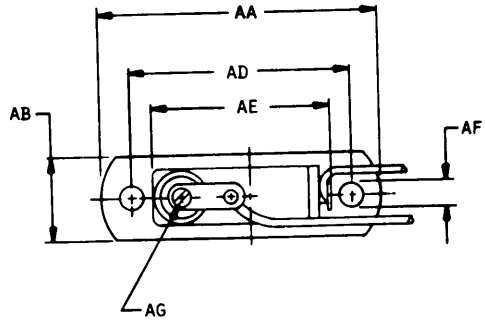

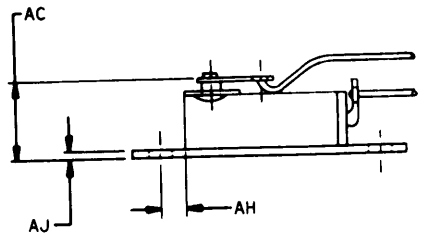


017-01-16

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

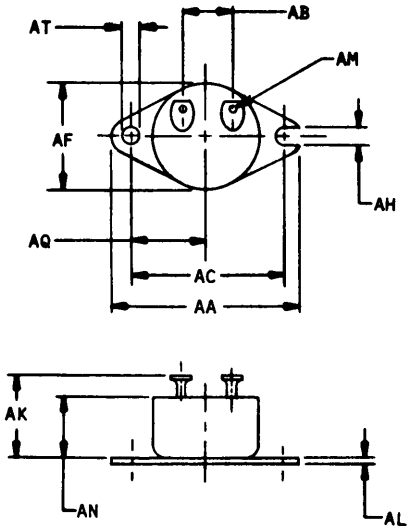


Ø17-Ø1-17

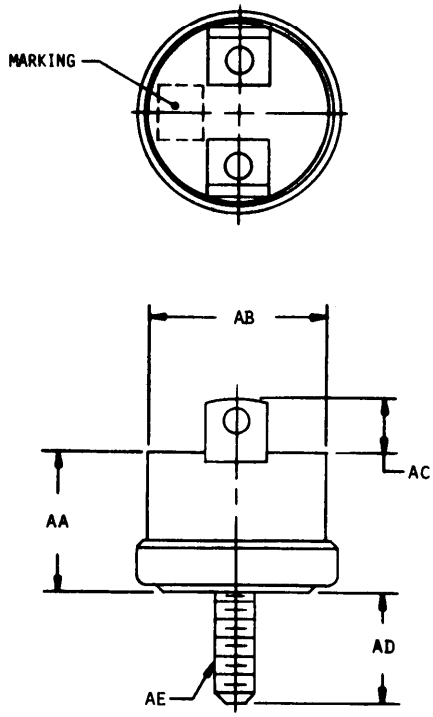


Ø17-Ø1-18

Source: https://assist.dla.mil -- Downloaded: 2026Ø-26T07:24Z
Check the source to verify that this is the currentversion before use.

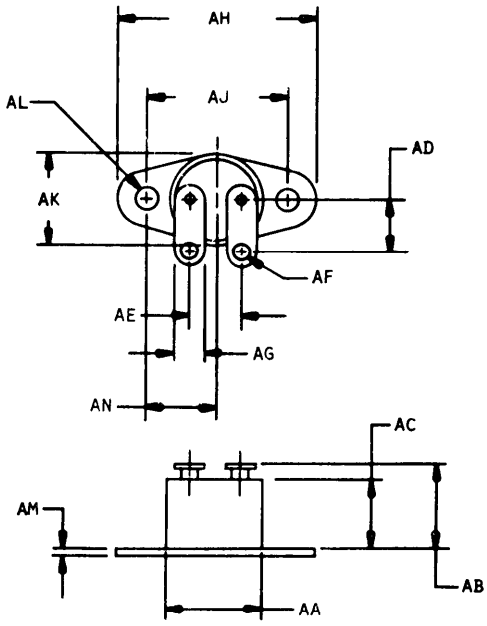


Ø17-Ø1-19

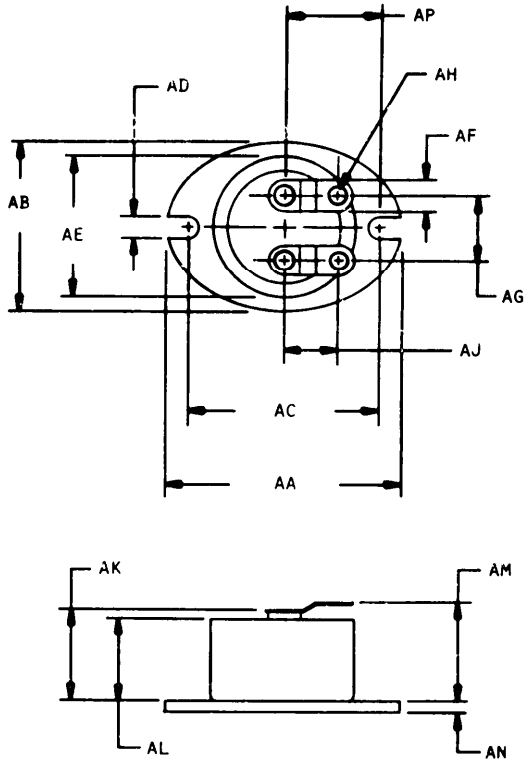


Ø17-Ø1-20

Source: https://assist.dla.mil -- Downloaded: 2026Ø1-26T07:24Z
Check the source to verify that this is the current version before use.

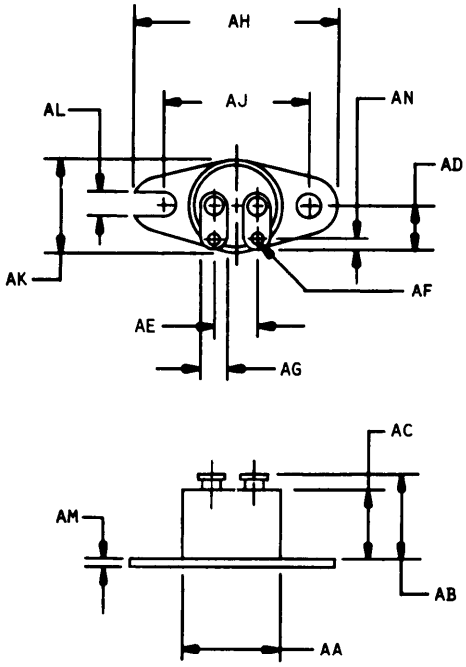


017-01-21

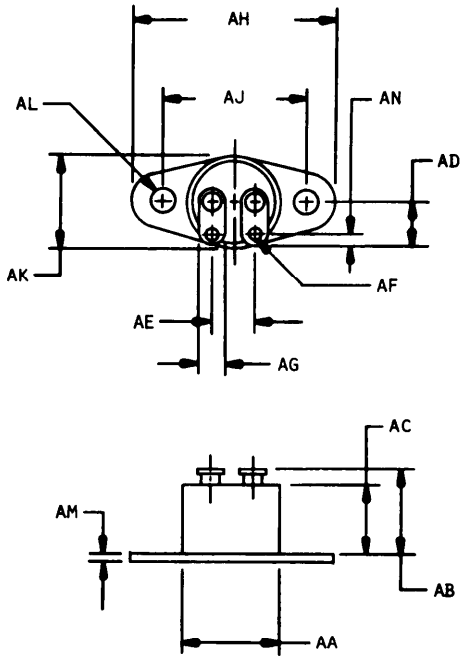


017-01-22

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

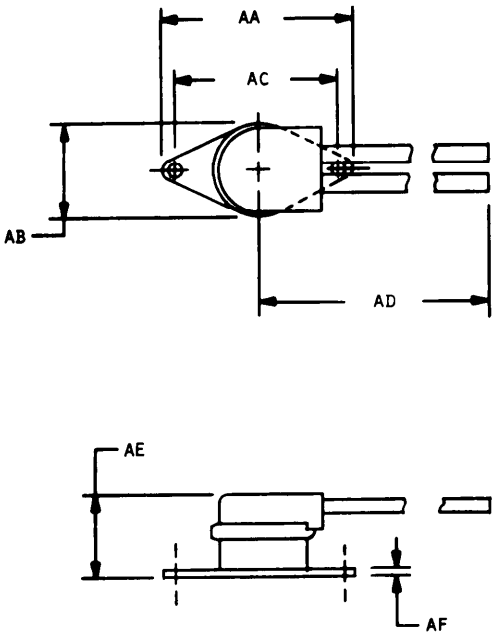


017-01-23

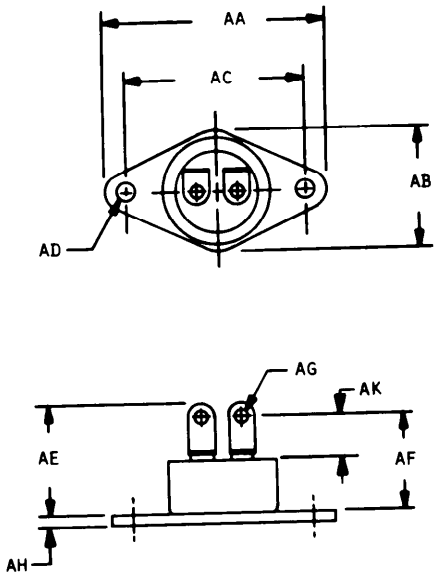


017-01-24

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

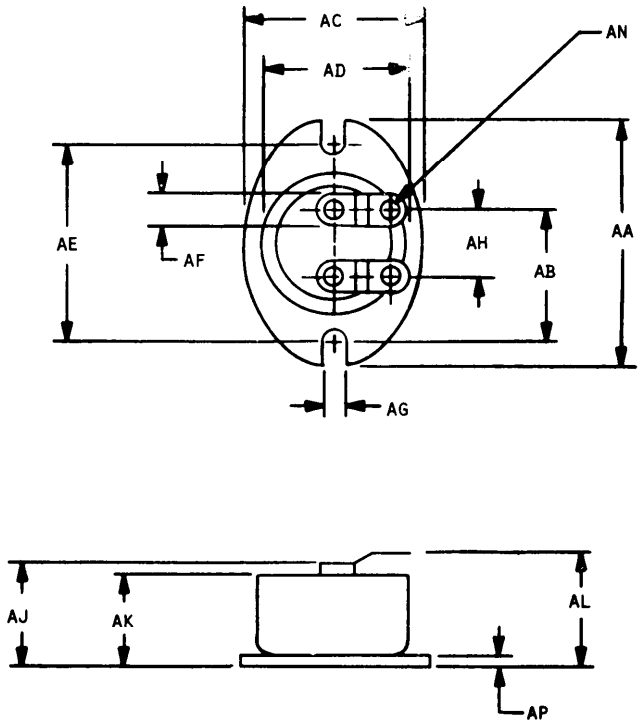


017-01-25

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

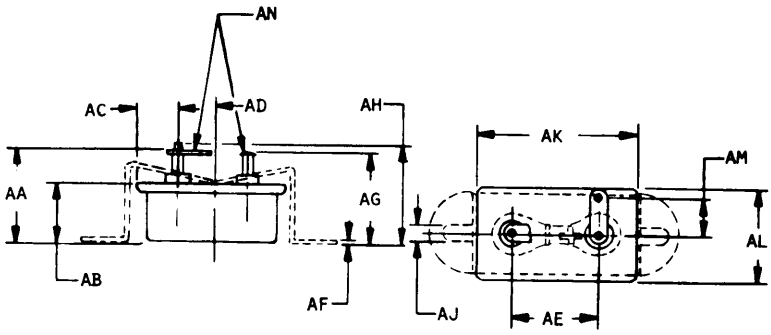


017-01-26

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

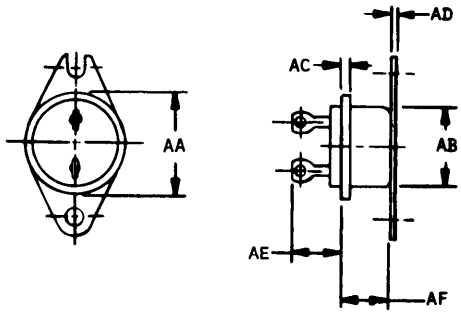


017-01-27

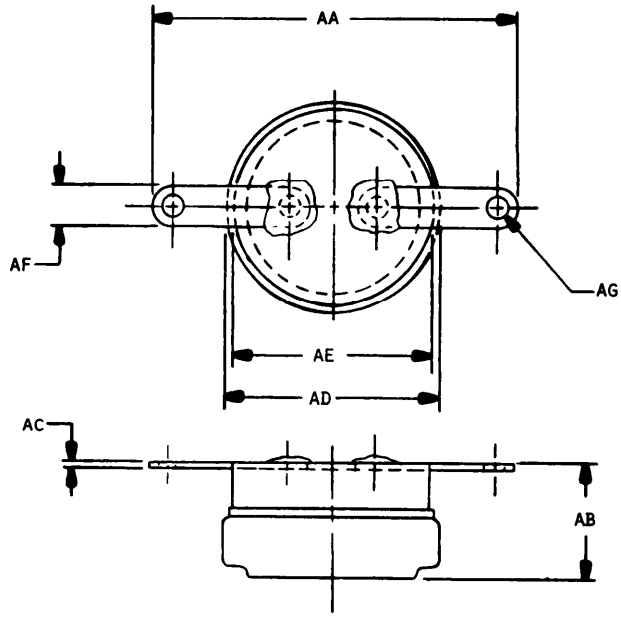


017-01-28

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

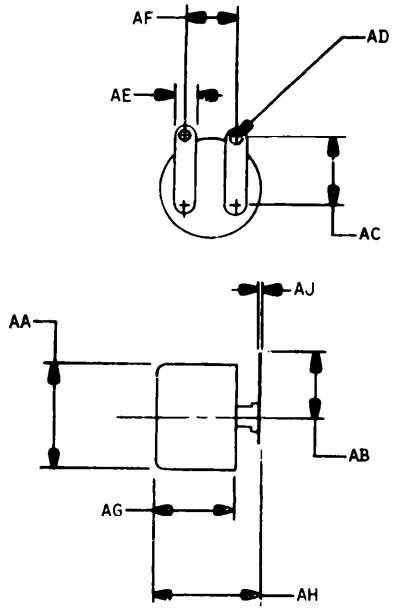


017-01-29

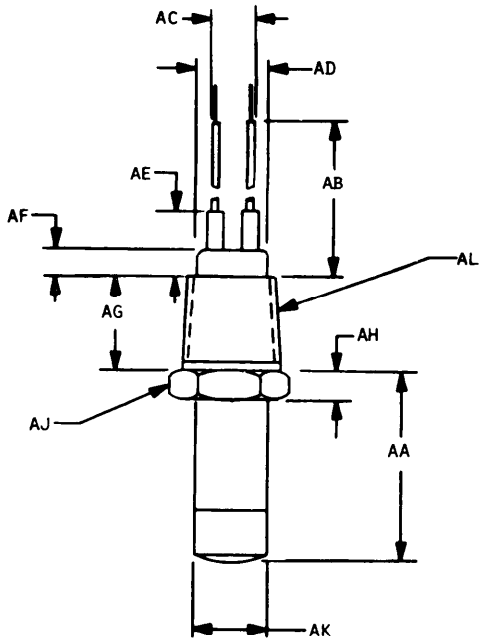


017-01-30

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

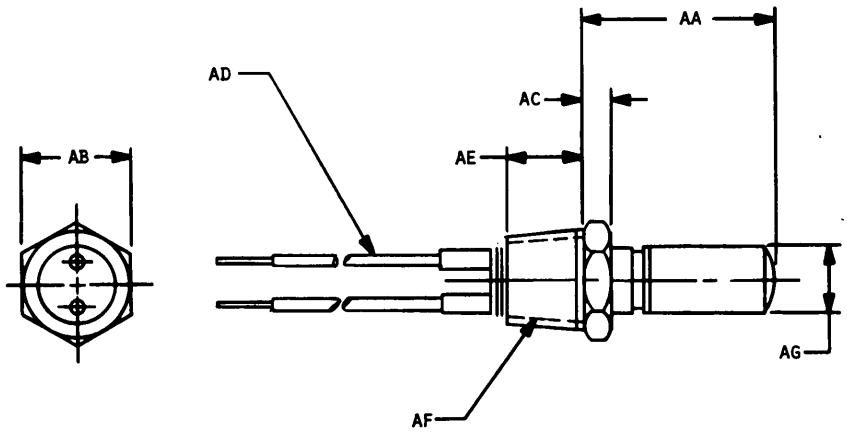


017-01-31

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

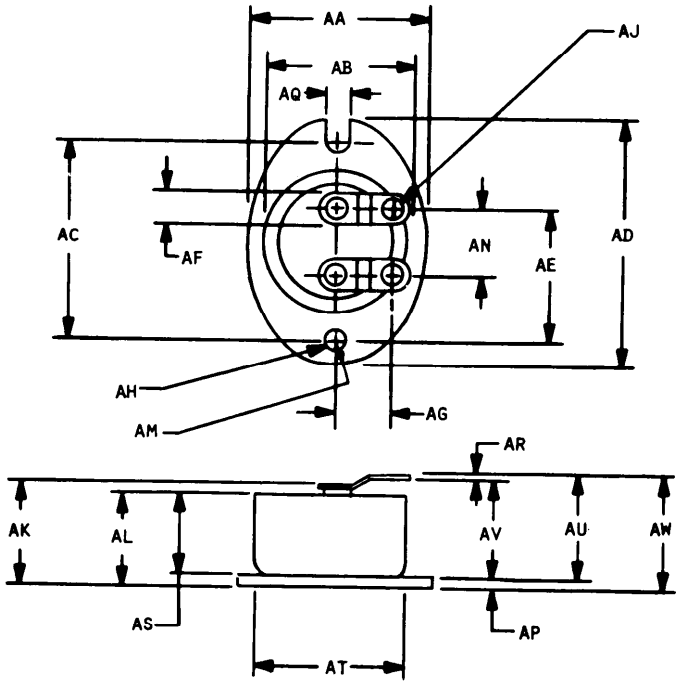

017-01-32

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

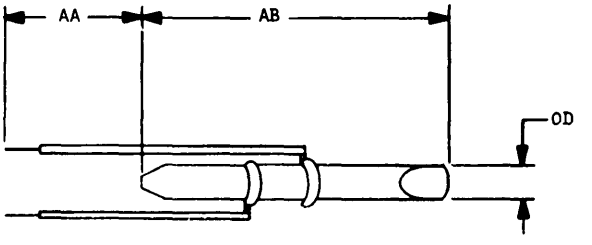

017-02-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	14	1414	148	1487	126	1572	26
0102	14	1416	148	1488	126	1573	26
0103	14	1418	144	1491	158	1580	32
0104	14	1419	146	1492	158	1581	32
0105	14	1420	146	1494	122	1582	32
0107	16	1421	148	1495	122	1583	32
0108	16	1426	160	1497	80	1584	32
0700	14	1427	162	1498	80	1585	32
0800	14	1428	162	1499	130	1590	18
1004	14	1430	162	1500	128	1591	18
1005	14	1431	162	1502	128	1592	18
1006	14	1432	88	1503	130	1593	18
1008	14	1433	146	1504	130	1594	18
1009	22	1435	158	1508	126	1595	18
1371	78	1436	160	1509	126	1600	26
1372	80	1438	162	1511	78	1602	26
1373	78	1439	162	1520	80	1604	26
1375	146	1442	154	1522	80	1606	26
1376	78	1444	154	1523	80	1608	26
1377	78	1446	152	1524	80	1609	28
1378	78	1447	152	1533	152	1610	26
1380	76	1448	152	1534	154	1611	28
1381	80	1449	90	1535	158	1612	28
1382	164	1452	162	1536	158	1614	30
1383	80	1453	162	1537	158	1616	30
1384	78	1455	150	1539	112	1618	30
1386	78	1456	150	1547	34	1640	30
1387	78	1459	162	1548	36	1641	30
1391	88	1462	164	1549	38	1652	42
1394	88	1466	156	1550	122	1654	42
1395	90	1467	156	1551	128	1656	42
1396	88	1468	126	1552	150	1660	42
1397	88	1470	156	1553	154	1668	38
1400	86	1475	154	1557	36	1672	46
1402	164	1476	154	1558	36	1673	46
1406	88	1477	70	1562	26	1674	46
1410	146	1478	126	1564	26	1676	46
1411	146	1479	126	1566	26	1678	48
1412	146	1482	124	1568	26	1680	48
1413	146	1486	124	1570	26	1682	48

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1684	48	1849	94	2102	42	2224	66
1688	46	1852	94	2104	42	2226	66
1690	46	1854	94	2106	42	2230	70
1702	48	1858	92	2108	42	2232	70
1704	40	1860	92	2110	42	2240	82
1706	48	1862	92	2112	44	2242	82
1710	48	1972	120	2114	44	2244	82
1712	48	1873	120	2120	44	2246	82
1722	62	1888	118	2122	44	2248	64
1724	62	1890	118	2124	44	2250	84
1726	62	1892	118	2126	44	2252	84
1732	64	1894	120	2128	44	2254	84
1734	64	1902	132	2140	44	2256	84
1736	64	1906	132	2142	44	2258	84
1742	62	1916	132	2144	44	2260	84
1743	62	1920	130	2146	46	2262	84
1744	62	1922	130	2148	46	2270	84
1740	62	1924	130	2150	46	2272	64
1752	64	1926	132	2160	46	2274	66
1756	62	1932	134	2162	50	2276	86
1762	64	1934	136	2164	50	2278	86
1766	66	1938	134	2166	50	2280	86
1767	66	1940	134	2168	50	2282	86
1760	66	1952	166	2170	50	2284	86
1770	66	1956	166	2172	50	2286	86
1776	64	1958	166	2174	50	2288	86
1778	64	1962	164	2176	50	2300	90
1780	64	1964	166	2178	50	2302	90
1784	70	1966	166	2190	52	2304	92
1786	70	1968	166	2192	52	2304	92
1768	70	1970	166	2194	52	2306	92
1790	70	2000	28	2196	52	2308	92
1794	70	2002	28	2198	52	2310	92
1796	70	2004	28	2198	52	2314	92
1800	68	2006	28	2200	52	2320	92
1802	60	2008	28	2210	62	2322	92
1842	94	2010	28	2212	62	2330	92
1843	94	2012	28	2214	64	2332	94
1846	94	2014	28	2216	64	2334	94
1840	94	2100	42	2220	64	2336	94
				2222	66		96

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.
2338	96
2340	96
2342	96
2344	96
2346	96
2350	96
2352	96
2354	96
2356	98
2358	98
2360	98
2362	98
2364	98
2366	98
2368	98
2380	118
2382	118
2384	118
2366	120
2390	120
2392	120
2394	120
2396	120
2398	120
2400	122
2402	122
2404	122
2406	122
2408	122
2410	122
2417	148
2420	132
2422	132
2430	136
2432	136
2434	136
2436	136
2430	136
2440	136
2442	136
2444	136
2446	136
2448	138
2450	138
2460	164
2462	166
2500	128
2510	138
2512	138
2514	138
2515	140
2516	140
2517	140
2518	140
2520	142
2522	142
2524	142
2525	142
2526	144
2527	144
2528	144
2530	34
2532	54
2534	34
2540	54
2542	54
2544	54
2550	58
2352	58
2554	56
2560	68
2566	68
2568	68
2570	68
2580	72
2562	72
2584	72
2590	76
2592	76
2594	76
2600	80
2602	80
2604	82
2606	82
2608	82
2610	82
2612	82
2620	88
2622	88
2624	88
2630	104
2632	104
2634	104
2636	104
2640	108
2642	108
2644	108
2650	110
2652	110
2654	110
2660	124
2662	124
2664	124
2666	124
2668	124
2670	124
2672	124
2674	126
2680	128
2682	128
2684	128
2686	128
2688	128
2690	128
2692	128
2700	130
2710	146
2712	148
2714	148
2720	148
	150
2722	150
2724	150
2726	150
2726	152
2730	152
2732	152
2734	152
2740	154
2742	154
2744	156
2746	156
2748	156
2750	156
2752	156
2754	158
2760	160
2762	160
2764	160
2766	160
2768	160
2770	160
2772	160
2774	164
3500	41
3501	41
3502	41
3505	41
3504	41
3900	31
3901	31
3902	31
3903	31
3904	31
3905	31
3906	31
3907	31
3908	31
3909	31
3910	31
3911	31

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	Text	Text
3912	31	4025	19	4065	21	4121	41
3913	31	4026	19	4066	21	4122	41
3914	31	4027	19	4067	21	4123	41
3915	31	4028	19	4068	21	4125	39
3916	31	4029	19	4069	21	4126	39
3917	31	4030	19	4070	21	4127	39
3918	31	4031	19	4071	21	4128	39
3919	31	4032	19	4072	21	4129	39
3920	31	4033	19	4073	21	4130	39
3921	31	4034	19	4074	21	4131	39
3922	31	4035	19	4075	21	4132	39
3923	31	4036	21	4076	21	4133	39
3924	31	4037	21	4077	21	4134	39
3925	31	4036	21	4078	21	4135	39
3926	31	4039	21	4079	21	4136	39
4000	19	4040	21	4080	21	4137	39
4001	19	4041	21	4081	21	4138	39
4002	19	4042	21	4082	21	4139	39
4003	19	4043	21	4083	21	4140	39
4004	19	4044	21	4100	39	4141	41
4005	19	4045	21	4101	39	4142	41
4006	19	4046	21	4102	39	4143	41
4007	19	4047	21	4103	39	4144	41
4008	19	4048	21	4104	39	4145	41
4009	19	4049	21	4105	39	4146	41
4010	19	4050	21	4106	39	4147	41
4011	19	4051	21	4107	39	4148	41
4012	19	4052	21	4108	39	4149	41
4013	19	4053	21	4109	39	4150	41
4014	19	4054	21	4110	39	4151	41
4Q15	19	4055	21	4111	39	4152	41
4016	19	4056	21	4112	39	4153	41
4017	19	4057	21	4113	39	4154	41
4918	19	4058	21	4114	39	4155	41
4019	19	4059	21	4115	39	4156	41
4020	19	4060	21	4116	41	4157	41
4021	19	4061	21	4117	41	4158	41
4022	19	4062	21	4118	41	4159	41
4023	19	4065	21	4119	41	4161	41
4024	19	4064	21	4120	41	4162	41

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4165	41	4735	116	4814	76	4890	72
4164	41	4736	116	4819	74	4891	56
4662	132	4737	114	4820	74	4892	56
4663	134	4730	114	4825	74	4893	36
4664	134	4759	114	4829	106	4894	54
4665	134	4740	114	4830	106	4906	52
4666	134	4741	114	4831	108	4908	52
4667	134	4742	116	4834	106	4950	24
4669	106	4743	118	4835	106	4952	112
4671	106	4745	112	4836	106	4956	112
4672	132	4746	112	4838	106	4958	110
4674	132	4748	112	4839	106	4959	110
4675	132	4749	116	4842	60	4960	112
4678	164	4750	116	4843	100	4969	74
4683	134	4751	116	4844	60	4970	74
4684	130	4752	116	4846	60	4971	74
4665	130	4754	68	4848	60	4975	164
4686	130	4755	68	4849	56	4976	164
4689	104	4756	68	4850	60	4977	164
4691	104	4760	66	4853	72	4978	158
4692	104	4761	66	4854	60	4979	158
4694	104	4762	68	4855	60	4980	90
4695	106	4765	110	4856	58	4981	90
4698	104	4766	110	4857	100	4983	90
4700	104	4770	108	4858	100	4984	90
4701	104	4771	110	4859	56	4985	90
4707	152	4772	110	4861	58	4986	90
4708	152	4773	110	4862	58	4989	106
4709	152	4782	108	4863	34	4991	90
4713	148	4788	72	4864	56	5000	60
4714	150	4790	72	4865	36	5060	20
4715	150	4793	72	4867	60	5061	20
4719	150	4795	72	4868	36	5062	20
4722	148	4798	70	4872	112	5063	20
4723	148	4799	70	4874	58	5068	22
4729	156	4805	72	4875	58	5069	22
4730	156	4609	76	4878	108	5070	22
4731	156	4610	76	4884	54	5071	22
4732	114	4611	76	4885	54	5297	102
4734	114	4812	76	4886	54	6200	152

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
6201	158	6285	102	6991	168		
6202	74	6286	100	6992	168		
6203	126	6287	102	6993	168		
6204	130	6288	102	6994	168		
6205	134	6289	102	6995	168		
6206	74	6291	98	7001	168		
6207	74	6292	56	7002	168		
6210	36	6293	56	7003	168		
6217	138	6294	56	7004	168		
6218	138	6299	112	7005	168		
6219	140	6300	54	7021	32		
6220	140	6311	56	7022	32		
6221	140	6312	56	7023	32		
6222	140	6315	144	7024	32		
6224	140	6316	144	7301	22		
6225	140	6318	142	7302	22		
6226	34	6319	142	7572	22		
6228	138	6320	114	7577	22		
6229	138	6321	114	7580	24		
6231	142	6322	114	7629	166		
6232	142	6323	114	7630	168		
6233	36	6324	116				
6234	142	6325	116				
6235	142	6326	116				
6236	144	6328	116				
6237	144	6329	116				
6238	144	6330	116				
6239	36	6331	118				
6250	34	6332	118				
6251	34	6333	118				
6263	36	6359	76				
6264	36	6369	14				
6265	36	6370	112				
6272	34	6371	100				
6273	34	6372	168				
6279	108	6870	166				
6280	56	6873	14				
6282	100	6874	16				
6283	102	6941	16				
6284	102	6942	16				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX

Page

Acceleration ---------- 34
Additional Part Marking ---------- 168
Additional Requirements---------- 168
Altitude Rating ---------- 20
Aperture Cards Required ---------- 16
Applicable Documents ---------- 170

Base Document ---------- 14

Calibration ---------- 38
City, State, Zip ---------- 14
Classification ---------- 18
Company Name/Command ---------- 14
Configuration---------- 22
Connector---------- 30
Connector Torque---------- 44
Contact Arrangement---------- 28
Contact Condition---------- 26
Contact Resistance---------- 46
Contract Number/Office Symbol---------- 14
Control---------- 14
Creepage (Snap Action Operation)---------- 48
Current Capacity---------- 50

Design and Construction---------- 26
Definition of Hermetic Sealing---------- 168
Dielectric Withstanding Voltage at Reduced Barometric Pressure ---- 52
Dielectric Withstanding Voltage at Sea Level---------- 58

Endurance---------- 62
Environmental Test Effect ---------- 30
Explosion---------- 64

Finishes---------- 24
Flame Response---------- 68
Format---------- 14
Fungus---------- 66

Government Design Activity---------- 14

Housing---------- 26
Humidity---------- 70

Illustrations---------- 24
Immersion---------- 74
Insulation Resistance---------- 76
Intermediate Current Switching---------- 82

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

Page

Life Cycle Rating---------- 18
Low Level Switching---------- 84

Materials---------- 24
Metals---------- 24
Moisture Resistance---------- 86
Mounting Torque---------- 90
Mounting Hardware---------- 166

Nomenclature---------- 170
Notes---------- 170

Overload---------- 92

Packaging---------- 170
Part Marking---------- 168
Part Number ---------- 16
Part Number Cross-Reference---------- 170
Phone Number ---------- 14
Proof Pressure---------- 94
Proof Temperature---------- 96

Quality Assurance Provisions---------- 170

Radiographic ---------- 98
Ratings---------- 18
Requester FSCM ---------- 14
Requester's Name ---------- 14
Resistance to Soldering Heat---------- 104
Resistance to Solvents ---------- 106
Revision of AEDPS Document Number ---------- 16

Salt Spray ---------- 108
Sand And Dust ---------- 110
Scope ---------- 16
Seal---------- 112
Sensitivity---------- 118
Shock, High Impact ---------- 122
Shock, Specified Pulse ---------- 126
Short Circuit ---------- 130
Solderability ---------- 132
Source Table ---------- 16
Street/Building---------- 14
Superseded Document---------- 170
System Application---------- 14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

Page

Tabulated Characteristics---------- 24
Temperature Anticipation---------- 134
Temperature, High---------- 138
Temperature, Low---------- 142
Temperature Rating---------- 22
Terminal Strength---------- 144
Terminal Shock---------- 48
Termination---------- 28
Thermometer---------- 32

Units of Measure---------- 16

Vibration, High Frequency---------- 150
Vibration, Low Frequency---------- 154
Vibration, Random---------- 158

Waterproofness---------- 164
Weight/Mass---------- 32
Workmanship---------- 166

*U.S. GOVERNMENT PRINTING OFFICE: 1983-O-605-034/1870

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SRS CONTROL NO.	
*TITLE CODE 1 2 3 4 5 6	*REQUESTER NO. 7 8 9 10 11 12

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET____OF____

CHAR CODE	CHARACTERISTIC VALUE 1 5 10 15 20 25 30 35 40 45 50 55 60

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET___OF___

SRS CONTROL NO.	
*TITLE CODE (1 2 3 4 5 6)	*REQUESTER NO. (7 8 9 10 11 12)

	CHAR CODE			
*REQUESTER'S NAME	Ø	1	Ø	1
*COMPANY NAME/COMMAND	Ø	1	Ø	2
*STREET/BUILDING	Ø	1	Ø	3
*CITY, STATE, ZIP	Ø	1	Ø	4
*PHONE NO. INCLUDE A/C AUTOVON IF APPLICABLE	Ø	1	Ø	5
*REQUESTER FSCM	1	Ø	Ø	4
*CONTRACT NO./OFFICE SYMBOL	1	Ø	Ø	5
*BASE DOCUMENT	1	Ø	Ø	6
*SYSTEM APPLICATION	1	Ø	Ø	8
*GOVERNMENT DESIGN ACTIVITY FSCM	6	3	6	9
*FORMAT: SIX SECTION DOCUMENT.	Ø	7	Ø	Ø
OR ONE SECTION DOCUMENT.	Ø	8	Ø	Ø
REVISION OF AEDPS DOCUMENT NO.	Ø	1	Ø	8
*CONTROL: SOURCE.	6	8	7	3
OR SPECIFICATION.	6	8	7	4
UNIT OF MEASURE: U.S.	6	9	4	1
OR SI.	6	9	4	2
*SOURCE TABLE	9	A	A	B

CHARACTERISTIC VALUE

1 5 10 15 20 25 30 35 40 45 50 55 60

PLEASE SUPPLY THE FOLLOWING:
DASH-NUMBERED PART___REV___NOTICE#___

AS A FINAL CHECK, SCAN THE SRS FOR THE FOLLOWING COMMON ERRORS:

- ☐ MANDATORY CHARACTERISTIC CODES AND VALUES NOT SUPPLIED
- ☐ ZERO (Ø) WRITTEN WITHOUT VIRGULE (0)
- ☐ CHARACTERISTIC CODE USED MORE THAN ONCE (CHARACTERS Ø, S̄, I, Ƶ CORRECTLY WRITTEN)

*MANDATORY

Source: https://assist.dla.mil -- Downloaded: 2026-04-26T07:24Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Missile Command
ATTN: DRSMI-RSDS
Redstone Arsenal, AL 35898

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.