DOD-STD-35-79A(MI)
2 February 1979

SUPERSEDING
MIL-STD-35-79(MI)
15 APRIL 1975

MILITARY STANDARD

ATTENUATORS, FIXED AND VARIABLE

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

FSC EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Attenuators, Fixed and Variable
Automated Engineering
Document Preparation System

DOD-STD-35-79A(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-79A(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for Attenuators, Fixed and Variable.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	3
	2.1	Issues of documents	3
	2.2	Other publications	4
	3.	DEFINITIONS	5
	4.	GENERAL REQUIREMENTS	6
	4.1	Introduction	6
	4.2	Specification Requirement Sheet (SRS)	6
	4.3	Configuration	6
	4.3.1	Dimensions	6
	4.3.2	Illustrations	6
	4.4	Units of measure	6
	5.	DETAILED REQUIREMENTS	7
	5.1	Introduction	7
	5.2	MSE Formats	7
	5.3	Referenced documents	7
	5.4	Tabulation	7
	5.5	Keyword Code Index (KCI) and Standard Paragraphs	9
	5.5.1	Interrelationship of Codes	9
	5.5.2	Automatic MSE Data	9
	5.5.3	DOD-STD-35 Tables	9

TABLES

Table	I.	Title Index	2
	II.	Tabulation candidates	8

APPENDICES

Appendix	A.	Illustrations	144
	B.	Characteristic Code Index	165
		Index	172

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for fixed and variable attenuators.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. It is recommended that MIL-STD-1352, Selection and Use of Fixed Attenuators, be reviewed prior to using this dash-numbered part book.

The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determinimg which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
ATTENUATOR, FIXED	096001	MIL-A-3933	COAXIAL LINE AND WAVE GUIDE
ATTENUATOR, VARIABLE	096002	MIL-A-13252	TS-402 ( )/U

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-A-3933	Attenuators, Fixed (Coaxial Line and Waveguide) General Specification For
MIL-A-13252	Attenuator TS-402 ( )/U
MIL-F-3922	Flanges, Waveguide, General Purpose, General Specification For

STANDARDS

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-810	Environmental Test Methods
MIL-STD-1276	Leads, Weldable, for Electronic Component Parts
MIL-STD-1285	Marking of Electrical and Electronic Parts
MIL-STD-1352	Selection of Fixed Attenuators

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTME380 Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Attenuators, Fixed and Variable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for fixed and variable attenuators, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to fixed and variable attentuators.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to fixed and variable attenuators.

4.3.2 Illustrations. Illustrations applicable to fixed and variable attenuators are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currenversion before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table II provides codes for column headings which may be used for fixed and variable attenuator characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE II. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1572	MINIMUM ATTEN (DECIBELS)	1573	MAXIMUM ATTEN (DECIBELS)	1575	NOMINAL ATTEN (DECIBELS)
1590	AVERAGE POWER RATING (WATTS)	1578	CHRST/ INPUT IMPEDANCE (OHMS)	1584	OUTPUT IMPEDANCE (OHMS)
1596	PEAK POWER RATING (WATTS)	1601	MAX VOLT RATING DC OR RMS	1602	MAX VOLT RATING (VOLTS DC)
1604	MAX VOLT RATING (VOLTS AC)	1620	MAXIMUM INSERTION LOSS (DB)	1636	TERM TYPE FROM ILLUSN 096-11-1
2102	MAXIMUM OPERATING FREQUENCY (HERTZ)	2104	MAXIMUM OPERATING FREQUENCY KILOHERTZ	2106	MAXIMUM OPERATING FREQUENCY MEGAHERTZ
2108	MAXIMUM OPERATING FREQUENCY GIGAHERTZ	2256	MAXIMUM POWER COEF (DB/WATT)	1634	MAXIMUM TEMP COEF (DB/DEG C)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.5 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.5.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.5.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.5.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT	0700
ONE SECTION DOCUMENT	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6874 THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).

0107

0108 0108.

SCOPE.

SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.

PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.

PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

6941 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.

6942 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION	
TYPE (SELECT ONE)	
L PAD.	1562
BRIDGED-T PAD.	1563
STRAIGHT-T PAD.	1564
BRIDGED-H PAD.	1565
O PAD.	1566
UNBALANCED PI PAD.	1567
BALANCED H PAD.	1568
BALANCED LADDER.	1569
UNBALANCED LADDER.	1570
OPTIONAL.	2310
(TYPE)	2311
CLASS	
PER BASE DOCUMENT (DESIGNATION)	2100
ELECTRICAL RATINGS	
ATTENUATION	
MINIMUM (DECIBELS)	1572

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CLASSIFICATION.
1562	THE ATTENUATOR SHALL BE AN L PAD.
1563	THE ATTENUATOR SHALL BE A BRIDGED-T PAD.
1564	THE ATTENUATOR SHALL BE A STRAIGHT-T PAD.
1565	THE ATTENUATOR SHALL BE A BRIDGED-H PAD.
1566	THE ATTENUATOR SHALL BE AN O PAD.
1567	THE ATTENUATOR SHALL BE AN UNBALANCED PI PAD.
1568	THE ATTENUATOR SHALL BE A BALANCED H PAD.
1569	THE ATTENUATOR SHALL BE A BALANCED LADDER PAD.
1570	THE ATTENUATOR SHALL BE AN UNBALANCED LADDER PAD.
2310	THE ATTENUATOR TYPE SHALL BE OPTIONAL.
2311	THE ATTENUATOR TYPE SHALL BE 2311.
	CLASS.
2100	CLASS 2100 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
	ELECTRICAL RATINGS.
	ATTENUATION.
1572	THE MINIMUM ATTENUATION SHALL BE 1572 DECIBEL(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELECTRICAL RATINGS (CONT)	
ATTENUATION (CONT)	
MAXIMUM (DECIBELS)	1573
NOMINAL (DECIBELS)	1575
AVERAGE POWER RATING	
MAXIMUM (WATTS)	1590
RATING TEMPERATURE (DEGREES CELSIUS)	1592
DERATE TO ZERO POWER TEMPERATURE (DEGREES CELSIUS)	1594
CHARACTERISTIC/INPUT IMPEDANCE (OHMS)	1578
OPERATING FREQUENCY RANGE (SELECT ONE)	
MINIMUM (HERTZ)	1608
*MAXIMUM (HERTZ)	1614
MINIMUM (KILOHERTZ)	1610
*MAXIMUM (KILOHERTZ)	1616
MINIMUM (MEGAHERTZ)	1612
*MAXIMUM (MEGAHERTZ)	1618
MINIMUM (GIGAHERTZ)	1613
*MAXIMUM (GIGAHERTZ)	1619

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1573	THE MAXIMUM ATTENUATION SHALL BE 1573 DECIBEL(S).
1575	THE ATTENUATION SHALL BE 1575 DECIBEL(S) NOMINAL.
1590	AVERAGE POWER RATING. THE MAXIMUM AVERAGE POWER RATING SHALL BE 1590 WATT(S) CONTINUOUS.
1592	THE AMBIENT TEMPERATURE SHALL BE 1592 DEGREES CELSIUS.
1594	POWER IS DERATED LINEARLY TO ZERO AT 1594 DEGREES CELSIUS.
1578	CHARACTERISTIC/INPUT IMPEDANCE. THE CHARACTERISTIC/INPUT IMPEDANCE SHALL BE 1578 OHMS.
	OPERATING FREQUENCY RANGE.
1608 1614	THE OPERATING FREQUENCY RANGE SHALL BE FROM 1608 TO 1614 HERTZ.
1610 1616	THE OPERATING FREQUENCY RANGE SHALL BE FROM 1610 TO 1616 KILOHERTZ.
1612 1618	THE OPERATING FREQUENCY RANGE SHALL BE FROM 1612 TO 1618 MEGAHERTZ.
1613 1619	THE OPERATING FREQUENCY RANGE SHALL BE FROM 1613 TO 1619 GIGAHERTZ.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELECTRICAL RATINGS (CONT)	
OPERATING FREQUENCY	
MAXIMUM (SELECT ONE)	
(HERTZ)	2102
(KILOHERTZ)	2104
(MEGAHERTZ)	2106
(GIGAHERTZ)	2108
OUTPUT IMPEDANCE (OHMS)	1584
PEAK POWER RATING	
MAXIMUM (KILOWATTS)	1596
RATING TEMPERATURE (DEGREES CELSIUS)	1598
VOLTAGE RATING	
MAXIMUM (SELECT ONE)	
(VOLTS DC OR RMS)	1601
(VOLTS DC)	1602
(VOLTS AC)	1604

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	OPERATING FREQUENCY.
2102	THE MAXIMUM OPERATING FREQUENCY SHALL BE 2102 HERTZ.
2104	THE MAXIMUM OPERATING FREQUENCY SHALL BE 2104 KILOHERTZ.
2106	THE MAXIMUM OPERATING FREQUENCY SHALL BE 2106 MEGAHERTZ.
2108	THE MAXIMUM OPERATING FREQUENCY SHALL BE 2108 GIGAHERTZ.
1584	OUTPUT IMPEDANCE. THE OUTPUT IMPEDANCE SHALL BE 1584 OHMS.
1596	PEAK POWER RATING. THE MAXIMUM PEAK POWER SHALL BE 1596 KILOWATT(S).
1598	THE AMBIENT TEMPERATURE SHALL BE 1598 DEGREES CELSIUS.
1601	VOLTAGE RATING. THE MAXIMUM CONTINUOUS WORKING VOLTAGE SHALL BE 1601 VOLT(S) DC OR RMS.
1602	VOLTAGE RATING. THE MAXIMUM CONTINUOUS WORKING VOLTAGE SHALL BE 1602 VOLT(S) DC.
1604	VOLTAGE RATING. THE MAXIMUM CONTINUOUS WORKING VOLTAGE SHALL BE 1604 VOLT(S) AC.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELECTRICAL RATINGS (CONT)	
SWITCH CURRENT RATING	
MAXIMUM (AMPERES)	1714
LOAD TYPE ____	1715
SWITCH VOLTAGE RATING	
MAXIMUM (SELECT ONE)	
(VOLTS DC OR RMS)	1719
(VOLTS DC)	1717
(VOLTS AC)	1716
INCREMENTAL ATTENUATION RANGE	
MINIMUM (DECIBELS)	2250
*MAXIMUM (DECIBELS)	2252
*STEPS (DECIBELS)	2254
INSERTION LOSS	
MAXIMUM (DECIBELS)	1620
POWER COEFFICIENT	
MAXIMUM (DECIBELS PER WATT)	2256

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1714	SWITCH CURRENT RATING. THE MAXIMUM CURRENT SHALL BE 1714 AMPERE(S).
1715	THE LOAD TYPE SHALL BE 1715.
1719	SWITCH VOLTAGE RATING. THE MAXIMUM WORKING VOLTAGE SHALL BE 1719 VOLT(S) DC OR RMS.
1717	SWITCH VOLTAGE RATING. THE MAXIMUM WORKING VOLTAGE SHALL BE 1717 VOLT(S) DC.
1716	SWITCH VOLTAGE RATING. THE MAXIMUM WORKING VOLTAGE SHALL BE 1716 VOLT(S) AC.
2250 2252 2254	INCREMENTAL ATTENUATION RANGE. INCREMENTAL ATTENUATION RANGE SHALL BE 2250 TO 2252 DECIBEL(S) IN 2254 DECIBEL STEP(S).
1620	INSERTION LOSS. THE MAXIMUM INSERTION LOSS SHALL BE 1620 DECIBEL(S).
2256	POWER COEFFICIENT. THE POWER COEFFICIENT SHALL BE NOT GREATER THAN 2256 DECIBEL(S) PER WATT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELECTRICAL RATINGS (CONT)	
REPEATABILITY	
MAXIMUM (DECIBELS)	2258
FREQUENCY RANGE (SELECT ONE)	
MINIMUM (HERTZ)	2260
*MAXIMUM (HERTZ)	2262
MINIMUM (MEGAHERTZ)	2264
*MAXIMUM (MEGAHERTZ)	2266
MINIMUM (GIGAHERTZ)	2268
*MAXIMUM (GIGAHERTZ)	2270
SWITCHING RATINGS	
METHOD (SELECT ONE)	
MANUAL.	2272
MOTORIZED.	2274
RELAYS.	2276
ELECTRONIC.	2278
PROGRAMMABLE.	2280
SPEED (MILLISECONDS)	2290
VOLTAGE (VOLTS DC)	2292

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2258	REPEATABILITY. REPEATABILITY SHALL BE NOT GREATER THAN 2258 DECIBEL(S).
2260 2262	THE FREQUENCY RANGE SHALL BE 2260 TO 2262 HERTZ.
2264 2266	THE FREQUENCY RANGE SHALL BE 2264 TO 2266 MEGAHERTZ.
2268 2270	THE FREQUENCY RANGE SHALL BE 2268 TO 2270 GIGAHERTZ.
	SWITCHING RATINGS.
2272	THE SWITCHING METHOD SHALL BE MANUAL.
2274	THE SWITCHING METHOD SHALL BE MOTORIZED.
2276	THE SWITCHING METHOD SHALL BE RELAYS.
2278	THE SWITCHING METHOD SHALL BE ELECTRONIC.
2280	SWITCHING SHALL BE PROGRAMMABLE.
2290	SWITCHING SPEED SHALL BE 2290 MILLISECOND(S).
2292	VOLTAGE SHALL BE 2292 VOLT(S) DC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SWITCHING RATINGS (CONT)	
POWER (SELECT ONE)	
(WATTS)	2294
(MILLIWATTS)	2296
DURATION OF POWER APPLICATION (MILLISECONDS)	2298
BITS (NUMBER)	2300
SWITCH LIFE RATING (SELECT ONE)	
STEPS (NUMBER)	2302
CYCLES (NUMBER)	2304
TEMPERATURE COEFFICIENT	
MAXIMUM (DECIBELS PER DEGREE CELSIUS)	1634
VOLTAGE STANDING WAVE RATIO (VSWR)	
MAXIMUM (NUMBER)	2306
ALTITUDE RATING	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5060
SEA LEVEL TO (METERS)	5061

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2294	POWER SHALL BE 2294 WATTS.
2296	POWER SHALL BE 2296 MILLIWATTS.
2298	SWITCHING POWER DURATION SHALL BE 2298 MILLISECOND(S).
2300	ATTENUATOR SHALL HAVE 2300 BIT INPUT.
2302	SWITCH LIFE RATING. THE SWITCH LIFE RATING SHALL BE 2302 STEPS.
2304	SWITCH LIFE RATING. THE SWITCH LIFE RATING SHALL BE 2304 CYCLES.
1634	TEMPERATURE COEFFICIENT. THE MAXIMUM TEMPERATURE COEFFICIENT SHALL BE 1634 DECIBEL(S) PER DEGREE CELSIUS.
2306	VOLTAGE STANDING WAVE RATIO (VSWR). THE MAXIMUM VSWR SHALL BE 2306.
	ALTITUDE RATING.
5060	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5060 FEET.
5061	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5061 METERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ALTITUDE RATING (CONT)	
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5062
SEA LEVEL TO (METERS)	5063
TEMPERATURE RATINGS	
OPERATING	
MINIMUM OPERATING (DEGREES CELSIUS)	5068
MAXIMUM OPERATING (DEGREES CELSIUS)	5069
NONOPERATING	
MINIMUM NONOPERATING (DEGREES CELSIUS)	5070
MAXIMUM NONOPERATING (DEGREES CELSIUS)	5071
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
*UNITS (SELECT ONE)	
U.S.	
INCHES.	7572
SI	
MILLIMETERS.	7577

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
5062	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5062 FEET.
5063	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5063 METERS.
	TEMPERATURE RATINGS.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.
5069	THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS.
5070	THE MINIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5070 DEGREES CELSIUS.
5071	THE MAXIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5071 DEGREES CELSIUS.
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950
NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.	
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	
MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE IX IS USED.	
METALS	
DISSIMILAR METALS.	7580

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.
	MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
	FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
7580	METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION	
CONNECTOR	
(TYPE)	2120
(PART NUMBER)	2122
SPECIFICATION (NUMBER)	2124
MATING CONNECTORS (TYPE)	2126
ENCLOSURE CONSTRUCTION (SELECT ONE)	
HERMETICALLY SEALED.	1686
METAL ENCASED.	1681
MOLDED.	1682
ENCAPSULATED.	1684
O-RING SEALED.	1683
NONTURN DEVICE (SELECT ONE)	
NOT REQUIRED.	1676
LOCATED ON ILLUSTRATION 096-12-1 AT POSITION (NUMBERS)	1678
SHAFT (SELECT ONE)	
PLAIN.	1648
SLOTTED.	1650
KNURLED.	1652

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	DESIGN AND CONSTRUCTION.
	CONNECTOR.
2120	CONNECTOR(S) SHALL BE TYPE 2120.
2122	CONNECTOR PART NUMBER(S) SHALL BE 2122.
2124	THE CONNECTOR SPECIFICATION SHALL BE 2124.
2126	MATING CONNECTOR(S) SHALL BE TYPE 2126.
	ENCLOSURE CONSTRUCTION.
1686	THE ATTENUATOR SHALL BE HERMETICALLY SEALED.
1681	THE ATTENUATOR SHALL BE METAL ENCASED.
1682	THE ATTENUATOR SHALL BE MOLDED.
1684	THE ATTENUATOR SHALL BE ENCAPSULATED.
1683	THE ATTENUATOR SHALL BE O-RING SEALED.
1676	NONTURN DEVICE. NO NONTURN DEVICES ARE REQUIRED.
1678	NONTURN DEVICE. NONTURN DEVICE(S) SHALL BE LOCATED AT POSITION NUMBER(S) 1678 FROM ILLUSTRATION 096-12-1.
	SHAFT.
1648	SHAFT END SHALL BE PLAIN.
1650	SHAFT END SHALL BE SLOTTED.
1652	SHAFT END SHALL BE KNURLED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
SHAFT (CONT)	
SLOTTED AND KNURLED.	1654
KNURL TYPE (SELECT ONE)	
PLAIN KNURL.	1657
DIAMOND KNURL.	1658
FLATTED.	1656
POSITION OF SHAFT FLAT PER ILLUSTRATION 096-21-1 (DEGREES FROM NONTURN DEVICE POSITION 1)	1659
SWITCH	
TYPE (SELECT ONE)	
PUSH-PULL.	1706
ROTARY.	1705
MOMENTARY PUSH.	2118
SPST.	1707
SPDT.	2128
DPST.	1708
DPDT.	2130

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1654	SHAFT END SHALL BE SLOTTED AND KNURLED.
1657	SHAFT END SHALL BE PLAIN KNURL.
1658	SHAFT END SHALL BE DIAMOND KNURL.
1656	THE SHAFT END SHALL BE FLATTED.
1659	THE SHAFT FLAT WITH SHAFT IN THE MAXIMUM COUNTERCLOCKWISE POSITION SHALL BE 1659 DEGREE(S) FROM NONTURN DEVICE POSITION 1 IN ILLUSTRATION 096-12-1.

SWITCH.

1706	THE SWITCH TYPE SHALL BE PUSH-PULL.
1705	THE SWITCH TYPE SHALL BE ROTARY.
2118	THE SWITCH TYPE SHALL BE MOMENTARY PUSH.
1707	THE SWITCH TYPE SHALL BE SINGLE POLE SINGLE THROW.
2128	THE SWITCH TYPE SHALL BE SINGLE POLE DOUBLE THROW.
1708	THE SWITCH TYPE SHALL BE DOUBLE POLE SINGLE THROW.
2130	THE SWITCH TYPE SHALL BE DOUBLE POLE DOUBLE THROW.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
SWITCH (CONT)	
TURNS ON AT START OF CLOCKWISE ROTATION.	2132
TURNS ON AT START OF COUNTERCLOCKWISE ROTATION.	2134
TERMINALS	
TYPE (SELECT ONE)	
SOLDERABLE.	1638
WELDABLE.	1640
SOLDERABLE/WELDABLE.	1642
WIRE WRAP.	1644
IN ACCORDANCE WITH MIL-STD-1276 (TYPE)	1646
IN ACCORDANCE WITH ILLUSTRATION 096-11-1 (STYLE LETTER)	1636
ACCOMMODATE WIRES (NUMBER)	2136
*AWG SIZE (NUMBER)	2138

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2132	THE SWITCH SHALL TURN ON AT THE START OF CLOCKWISE ROTATION.
2134	THE SWITCH SHALL TURN ON AT THE START OF COUNTERCLOCKWISE ROTATION.
	TERMINALS.
1638	THE TERMINAL(S) SHALL BE SOLDERABLE.
1640	THE TERMINAL(S) SHALL BE WELDABLE.
1642	THE TERMINAL(S) SHALL BE SOLDERABLE/WELDABLE.
1644	THE TERMINAL(S) SHALL ACCOMMODATE WIRE WRAP.
1646	THE TERMINAL(S) SHALL BE IN ACCORDANCE WITH TYPE 1646 OF MIL-STD-1276.
1636	THE TERMINAL(S) SHALL BE IN ACCORDANCE WITH STYLE LETTER 1636 ON ILLUSTRATION 096-11-1.
2136 2138	THE TERMINAL(S) SHALL ACCOMMODATE 2136 WIRE(S) OF SIZE 2138 AWG.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
TERMINAL DESIGNATIONS	
IN ACCORDANCE WITH TERMINAL DESIGNATION TABLE.	
FLANGE	
PER MIL-F-3922 (TYPE)	2142
ELECTRICAL TRAVEL	
(DEGREES)	1760
TOLERANCE (PLUS OR MINUS DEGREES)	1761

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR.
CODE STANDARD PARAGRAPH

TERMINAL DESIGNATIONS. TERMINAL DESIGNATIONS SHALL BE IN ACCORDANCE WITH TERMINAL DESIGNATION TABLE.

TERMINAL DESIGNATION TABLE

TERMINAL NO.	DESIGNATION
4300	4301
4302	4303
4304	4305
4306	4307
4308	4309
4310	4311
4312	4313
4314	4315
4316	4317
4318	4319
4320	4321
4322	4323

2142 FLANGE. THE FLANGE SHALL BE TYPE 2142 IN ACCORDANCE WITH MIL-F-3922.

1760 ELECTRICAL TRAVEL. THE ELECTRICAL TRAVEL SHALL BE 1760 DEGREE(S).

1761 ELECTRICAL TRAVEL TOLERANCE SHALL BE PLUS OR MINUS 1761 DEGREE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
MECHANICAL BACKLASH	
MAXIMUM (DEGREES)	1757
MECHANICAL TRAVEL (SELECT ONE)	
(DEGREES)	1770
TOLERANCE (PLUS OR MINUS DEGREES)	1772
(TURNS)	1774
TOLERANCE (TURNS)	1776
TURNING TORQUE	
MAXIMUM (SELECT ONE)	
(OUNCE-INCHES)	1728
(NEWTON METERS)	1730
MINIMUM (SELECT ONE)	
(OUNCE-INCHES)	1732
(NEWTON METERS)	1734

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1757	MECHANICAL BACKLASH. MECHANICAL BACKLASH SHALL BE NOT GREATER THAN 1757 DEGREE(S).
1770	MECHANICAL TRAVEL. MECHANICAL TRAVEL SHALL BE 1770 DEGREE(S).
1772	MECHANICAL TRAVEL TOLERANCE SHALL BE PLUS OR MINUS 1772 DEGREE(S).
1774	MECHANICAL TRAVEL SHALL BE 1774 TURN(S).
1776	MECHANICAL TRAVEL TOLERANCE SHALL BE PLUS OR MINUS 1776 TURN(S).
1728	TURNING TORQUE. TURNING TORQUE SHALL BE NOT GREATER THAN 1728 OUNCE-INCH(S).
1730	TURNING TORQUE. TURNING TORQUE SHALL BE NOT GREATER THAN 1730 NEWTON METER(S).
1732	TURNING TORQUE. TURNING TORQUE SHALL BE NOT LESS THAN 1732 OUNCE-INCH(S).
1734	TURNING TORQUE. TURNING TORQUE SHALL BE NOT LESS THAN 1734 NEWTON METER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
STOP TORQUE	
MINIMUM (SELECT ONE)	
(POUND-INCHES)	1751
(NEWTON METERS)	1752
WEIGHT	
MAXIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024
ATTENUATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4292

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1751	STOP TORQUE. STOP TORQUE SHALL BE NOT LESS THAN 1751 POUND-INCH(S).
1752	STOP TORQUE. STOP TORQUE SHALL BE NOT LESS THAN 1752 NEWTON METER(S).
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7023	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).
7021	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).
4292	ATTENUATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4292.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ATTENUATION (CONT)	
REQUIREMENTS (CONT)	
MINIMUM (DECIBELS)	2160
*MAXIMUM (DECIBELS)	2162
PER ATTENUATION TABLE.	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4271
AS FOLLOWS:	2166

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2160 ATTENUATION. THE ATTENUATION SHALL BE FROM 2160 DECIBEL(S)
2162 TO 2162 DECIBEL(S).

ATTENUATION. THE ATTENUATION SHALL BE IN ACCORDANCE WITH THE ATTENUATION TABLE.

ATTENUATION TABLE

PCT ROT	STEP NO.	ATTENUATION (DB) NOM	TOL PLUS	TOL MINUS	PCT INPUT V AT THE OUTPUT	PAD ID
2000	2001	2002	2003	2004	2005	2006
2007	2008	2009	2010	2011	2012	2013
2014	2015	2016	2017	2018	2019	2020
2021	2022	2023	2024	2025	2026	2027
2028	2029	2030	2031	2032	2033	2034
2035	2036	2037	2038	2039	2040	2041
2042	2043	2044	2045	2046	2047	2048
2049	2050	2051	2052	2053	2054	2055
2056	2057	2058	2059	2060	2061	2062
2063	2064	2065	2066	2067	2068	2069

4271 ATTENUATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4271.

2166 ATTENUATION. TESTING SHALL BE PERFORMED AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ATTENUATION (CONT)	
AS FOLLOWS: (CONT)	
INPUT VOLTAGE (SELECT ONE)	
(VOLTS DC)	4276
(VOLTS AC)	4278
FREQUENCY (HERTZ)	4279
TERMINATING RESISTANCE (OHMS)	4280
ATTENUATION SHALL BE MEASURED (SELECT ONE)	
AT ZERO AND 100 PERCENT ROTATION.	4284
AT EACH STEP.	4286
AT POSITIONS SHOWN IN ATTENUATION TABLE.	4288
ATTENUATION ACCURACY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1814

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4276	INPUT VOLTAGE SHALL BE 4276 VOLT(S) DC.
4278	INPUT VOLTAGE SHALL BE 4278 VOLT(S) AC.
4279	INPUT FREQUENCY OF AC VOLTAGE SHALL BE 4279 HERTZ.
4280	THE TERMINATING RESISTANCE SHALL BE 4280 OHM(S).
4284	ATTENUATION SHALL BE MEASURED AT ZERO AND 100 PERCENT ROTATION.
4286	ATTENUATION SHALL BE MEASURED AT EACH STEP.
4288	ATTENUATION SHALL BE MEASURED AT THE ATTENUATOR SETTING SHOWN IN THE ATTENUATION TABLE.
1814	ATTENUATION ACCURACY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1814.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ATTENUATION ACCURACY (CONT)	
REQUIREMENTS (CONT)	
PER ATTENUATION ACCURACY TABLE.	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1802
PER MIL-A-13252.	1804
OUTPUT LEVEL, 1 MILLIWATT (DECIBELS)	1806
TEST FREQUENCIES SHALL BE IDENTIFIED IN ATTENUATION ACCURACY TABLE.	1808
TERMINATING RESISTANCE (OHMS)	1810

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

ATTENUATION ACCURACY. THE REQUIREMENTS SHALL BE AS SPECIFIED IN THE ATTENUATION ACCURACY TABLE.

ATTENUATION ACCURACY TABLE

FREQUENCY (KHZ)		ATTEN ACCURACY	UP TO	OVER	UP TO (DB) +	OVER (DB) +	PAD
MIN	MAX	(+OR-DB)	(DB)	(DB)	INSR LS	INSR LS	ID
4400	4401	4402	4403	4404	4405	4406	4407
4408	4409	4410	4411	4412	4413	4414	4415
4416	4417	4418	4419	4420	4421	4422	4423
4424	4425	4426	4427	4428	4429	4430	4431
4432	4433	4434	4435	4436	4437	4438	4439
4440	4441	4442	4443	4444	4445	4446	4447
4448	4449	4450	4451	4452	4453	4454	4455
4456	4457	4458	4459	4460	4461	4462	4463

1802 ATTENUATION ACCURACY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1802.

1804 ATTENUATION ACCURACY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-A-13252.

1806 THE OUTPUT LEVEL SHALL BE 1806 DECIBEL(S) AT A REFERENCE POWER OF 1 MILLIWATT.

1808 TEST FREQUENCIES SHALL BE THOSE IDENTIFIED IN THE ATTENUATION ACCURACY TABLE.

1810 THE ATTENUATOR SHALL BE TERMINATED WITH A NONINDUCTIVE 1810 OHM RESISTANCE.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONNECTOR WEAR RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1824
NO REMOVAL OF EXCESSIVE MATERIAL OR LUBRICANT DURING OR AFTER CYCLING.	1826
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1818
PER MIL-A-3933.	1819
CONNECTION AND DISCONNECTION CYCLES (NUMBER)	1820
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4908
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4906

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currenversion before use.

CHAR CODE	STANDARD PARAGRAPH
1824	CONNECTOR WEAR RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1824.
1826	CONNECTOR WEAR RESISTANCE. THERE SHALL BE NO REMOVAL OF EXCESSIVE MATERIAL OR LUBRICANT DURING OR AFTER CYCLING.
1818	CONNECTOR WEAR RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1818.
1819	CONNECTOR WEAR RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-A-3933.
1820	THE CONNECTORS SHALL BE SUBJECTED TO 1820 CYCLES OF CONNECTION AND DISCONNECTION.
4908	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4908.
4906	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN. (CONT)	
MAXIMUM LEAKAGE (MILLIAMPERES)	4894
MAXIMUM CHANGE IN CHARACTERISTIC IMPEDANCE (PERCENT)	4009
MAXIMUM CHANGE IN ATTENUATION (DECIBELS)	4010
ATTENUATION ACCURACY AS SPECIFIED.	4012
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4884
PER MIL-STD-202, METHOD 301.	6300
*ALTITUDE PER METHOD 105 OF MIL-STD-202	
*TEST CONDITION (LETTER)	4886
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4885
(VOLTS, AC)	4849

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4894	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4894 MILLIAMPERE(S).
4009	CHANGE IN CHARACTERISTIC IMPEDANCE SHALL BE NOT GREATER THAN 4009 PERCENT.
4010	CHANGE IN ATTENUATION SHALL BE NOT GREATER THAN 4010 DECIBEL(S).
4012	ITEM SHALL MEET ATTENUATION ACCURACY REQUIREMENTS SPECIFIED.
4884	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4884.
6300	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.
4886	ALTITUDE SHALL BE IN ACCORDANCE WITH TEST CONDITION LETTER 4886 OF METHOD 105 OF MIL-STD-202.
4885	TEST VOLTAGE SHALL BE 4885 VOLTS, DC.
4849	TEST VOLTAGE SHALL BE 4849 VOLTS, AC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	6311
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	6312
BETWEEN MUTUALLY INSULATED PARTS.	6292
BETWEEN ALL INSULATED PARTS AND GROUND.	6293
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	6294
SPECIAL PREPARATION ____	2168
DURATION OF VOLTAGE APPLICATION (SECONDS)	4891
MOUNTING ____	2170
REGULATION OF TEST VOLTAGE (PERCENT)	6308
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4900

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
6311	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
6312	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
6292	BETWEEN MUTUALLY INSULATED PARTS.
6293	BETWEEN ALL INSULATED PARTS AND GROUND.
6294	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
2168	SPECIAL PREPARATION SHALL BE 2168.
4891	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4891 SECOND(S).
2170	MOUNTING SHALL BE 2170.
6308	REGULATION OF THE TEST VOLTAGE SHALL BE WITHIN 6308 PERCENT.
4900	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4900 KILOVOLTAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4874
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4856
MAXIMUM LEAKAGE (MILLIAMPERES)	4875
MAXIMUM CHANGE IN CHARACTERISTIC IMPEDANCE (PERCENT)	4014
MAXIMUM CHANGE IN ATTENUATION (DECIBELS)	4016
ATTENUATION ACCURACY AS SPECIFIED.	4018
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4861
PER MIL-STD-202, METHOD 301.	4862

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4874	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.
4856	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4875	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4875 MILLIAMPERE(S).
4014	CHANGE IN CHARACTERISTIC IMPEDANCE SHALL BE NOT GREATER THAN 4014 PERCENT.
4016	CHANGE IN ATTENUATION SHALL BE NOT GREATER THAN 4016 DECIBEL(S).
4018	ITEM SHALL MEET ATTENUATION ACCURACY REQUIREMENTS SPECIFIED.
4861	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861.
4862	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	4842
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	4848
BETWEEN MUTUALLY INSULATED PARTS.	4844
BETWEEN ALL INSULATED PARTS AND GROUND.	4845
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	4846
SPECIAL PREPARATION ____	2172
DURATION OF VOLTAGE APPLICATION (SECONDS)	4867
MOUNTING ____	2174
REGULATION OF TEST VOLTAGE (PERCENT)	4869
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4870

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
4842	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
4848	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
4844	BETWEEN MUTUALLY INSULATED PARTS.
4845	BETWEEN ALL INSULATED PARTS AND GROUND.
4846	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
2172	SPECIAL PREPARATION SHALL BE 2172.
4867	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4867 SECOND(S).
2174	MOUNTING SHALL BE 2174.
4869	REGULATION OF TEST VOLTAGE SHALL BE WITHIN 4869 PERCENT.
4870	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4870 KILOVOLTAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELECTROMAGNETIC INTERFERENCE (EMI)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2176
AS FOLLOWS:	2177
MINIMUM RF LEAKAGE BELOW INCOMING POWER LEVEL (DECIBELS)	2178
MAXIMUM LEAKAGE (DECIBELS)	2180
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2182
PER MIL-A-3933.	2184
ATTENUATION IN LINE (DECIBELS)	2186
FREQUENCY RANGE (SELECT ONE)	
MINIMUM (MEGAHERTZ)	2187
*MAXIMUM (MEGAHERTZ)	2188
MINIMUM (GIGAHERTZ)	2189
*MAXIMUM (GIGAHERTZ)	2190
FREQUENCY, MAXIMUM (SELECT ONE)	
(MEGAHERTZ)	2192
(GIGAHERTZ)	2193

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2176	ELECTROMAGNETIC INTERFERENCE (EMI). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2176.
2177	ELECTROMAGNETIC INTERFERENCE (EMI). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2178	THE RF LEAKAGE SHALL BE NOT LESS THAN 2178 DECIBEL(S) BELOW THE INCOMING LEVEL.
2180	THE RF LEAKAGE SHALL BE NOT GREATER THAN 2180 DECIBEL(S).
2182	ELECTROMAGNETIC INTERFERENCE (EMI). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2182.
2184	ELECTROMAGNETIC INTERFERENCE (EMI). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-A-3933.
2186	THE ATTENUATION IN THE LINE SHALL BE 2186 DECIBEL(S).
2187 2188	THE FREQUENCY RANGE SHALL BE FROM 2187 TO 2188 MEGAHERTZ.
2189 2190	THE FREQUENCY RANGE SHALL BE FROM 2189 TO 2190 GIGAHERTZ.
2192	THE FREQUENCY SHALL BE NOT GREATER THAN 2192 MEGAHERTZ.
2193	THE FREQUENCY SHALL BE NOT GREATER THAN 2193 GIGAHERTZ.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELECTROMAGNETIC INTERFERENCE (EMI) (CONT)	
PER MIL-A-3933. (CONT)	
INCOMING POWER LEVEL, 1 MILLIWATT (DECIBELS)	2195
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4760
FUNGUS RESISTANT BY CERTIFICATION OR BY TEST.	4761
NO EVIDENCE OF FUNGUS GROWTH WHEN TESTED.	4762
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4754
PER MIL-STD-810, METHOD 508.	4755
TEST PERIOD (DAYS)	4756

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2195 THE INCOMING POWER LEVEL SHALL BE 2195 DECIBEL(S) AT A REFERENCE POWER OF 1 MILLIWATT.

4760 FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.

4761 FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED, THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.

4762 FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.

4754 FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.

4755 FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.

4756 TEST PERIOD SHALL BE 4756 DAY(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4798
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	4799
AFTER DRYING	
MAXIMUM CHANGE IN CHARACTERISTIC IMPEDANCE (PERCENT)	4222
MAXIMUM CHANGE ATTENUATION (DECIBELS)	4226
ATTENUATION ACCURACY AS SPECIFIED.	4230
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	4795
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	4805
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	4813
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	4803
REMAIN WITHIN SPECIFIED TOLERANCE.	4791

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4798	HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.
4799	HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
4222	CHANGE IN CHARACTERISTIC IMPEDANCE SHALL BE NOT GREATER THAN 4222 PERCENT AFTER DRYING.
4226	CHANGE IN ATTENUATION SHALL BE NOT GREATER THAN 4226 DECIBEL(S) AFTER DRYING.
4230	ITEM(S) SHALL MEET ATTENUATION ACCURACY REQUIREMENTS SPECIFIED AFTER DRYING.
4795	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4795 MEGOHM(S) AT HIGH HUMIDITY.
4805	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4805 MEGOHM(S) AFTER DRYING.
4813	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4813 MILLIAMPERE(S) AT HIGH HUMIDITY.
4803	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4803 MILLIAMPERE(S) AFTER DRYING.
4791	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4788
PER MIL-STD-202, METHOD 103.	4853
*TEST CONDITION (LETTER)	4890
POLARIZING VOLTAGE (VOLTS, DC)	4793
DURATION OF POLARIZING VOLTAGE APPLICATION (HOURS)	4790
POINTS OF APPLICATION OF POLARIZING VOLTAGE (TERMINAL DESIGNATION)	4272
IMMERSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4819
NO EVIDENCE OF PHYSICAL DAMAGE.	4820
MAXIMUM CHANGE IN CHARACTERISTIC IMPEDANCE (PERCENT)	4040
MAXIMUM CHANGE IN ATTENUATION (DECIBELS)	4042
ATTENUATION ACCURACY AS SPECIFIED.	4044

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4788	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.
4853	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 103 OF MIL-STD-202.
4890	TEST CONDITION LETTER 4890 SHALL APPLY.
4793	MAGNITUDE OF THE POLARIZING VOLTAGE SHALL BE 4793 VOLTS, DC.
4790	DURATION OF APPLICATION OF VOLTAGE SHALL BE 4790 HOUR(S).
4272	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE TERMINALS 4272.
4819	IMMERSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4819.
4820	IMMERSION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4040	CHANGE IN CHARACTERISTIC IMPEDANCE SHALL BE NOT GREATER THAN 4040 PERCENT.
4042	CHANGE IN ATTENUATION SHALL BE NOT GREATER THAN 4042 DECIBEL(S).
4044	ITEM SHALL MEET ATTENUATION ACCURACY REQUIREMENTS SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMMERSION (CONT)	
NO EVIDNECE OF PHYSICAL DAMAGE. (CONT)	
MINIMUM INSULATION RESISTANCE (MEGOHMS)	4825
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4809
PER MIL-STD-202, METHOD 104.	4810
*TEST CONDITION (LETTER)	4811
MEASUREMENTS AFTER FINAL CYCLE (HOURS)	4812
TIME BEFORE MEASUREMENTS AFTER FINAL CYCLE (HOURS)	4814
IMPEDANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1878
AS FOLLOWS:	2196

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4825	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 4825 MEGOHM(S).
4809	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WTIH THE BASE DOCUMENT, EXCEPT 4809.
4810	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 104 OF MIL-STD-202.
4811	TEST CONDITION LETTER 4811 SHALL APPLY.
4812	FINAL MEASUREMENT(S) SHALL BE MADE WITHIN 4812 HOUR(S) AFTER FINAL CYCLE.
4814	MEASUREMENTS SHALL BE NOT MADE UNTIL 4814 HOUR(S) AFTER THE FINAL CYCLE.
1878	IMPEDANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1878.
2196	IMPEDANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMPEDANCE (CONT)	
AS FOLLOWS: (CONT)	
INPUT IMPEDANCE (OHMS)	2198
TOLERANCE	
PLUS (PERCENT)	2200
MINUS (PERCENT)	2202
OUTPUT IMPEDANCE (OHMS)	2204
TOLERANCE	
PLUS (PERCENT)	2206
MINUS (PERCENT)	2208
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1864
PER MIL-A-13252.	1866
TERMINATING RESISTOR (OHMS)	1870
ATTENUATOR SETTING FOR INPUT IMPEDANCE MEASUREMENTS (DECIBELS)	1872
ATTENUATOR SETTING FOR OUTPUT IMPEDANCE MEASUREMENTS (DECIBELS)	1874

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2198	THE INPUT IMPEDANCE SHALL BE 2198 OHM(S).
2200	TOLERANCE ON INPUT IMPEDANCE SHALL BE PLUS 2200 PERCENT.
2202	TOLERANCE ON INPUT IMPEDANCE SHALL BE MINUS 2202 PERCENT.
2204	THE OUTPUT IMPEDANCE SHALL BE 2204 OHM(S).
2206	TOLERANCE ON OUTPUT IMPEDANCE SHALL BE PLUS 2206 PERCENT.
2208	TOLERANCE ON OUTPUT IMPEDANCE SHALL BE MINUS 2208 PERCENT.
1864	IMPEDANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1864.
1866	IMPEDANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-A-13252.
1870	THE ATTENUATOR SHALL BE TERMINATED WITH A 1870 OHM RESISTOR.
1872	INPUT IMPEDANCE DATA SHALL BE TAKEN AT AN ATTENUATOR SETTING OF 1872 DECIBEL(S).
1874	OUTPUT IMPEDANCE DATA SHALL BE TAKEN AT AN ATTENUATOR SETTING OF 1874 DECIBEL(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1380
AS FOLLOWS:	6359
*MINIMUM INSULATION RESISTANCE (SELECT ONE)	
SINGLE TEST	
(MEGOHMS)	1386
MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	1384
*SECOND TEST (MEGOHMS)	1387
MAXIMUM CHANGE IN CHARACTERISTIC IMPEDANCE (PERCENT)	4050
MAXIMUM CHANGE IN ATTENUATION (DECIBELS)	4052
ATTENUATION ACCURACY AS SPECIFIED.	4054
NO EVIDENCE OF PHYSICAL DAMAGE.	1407

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1380	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.
6359	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1386	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 1386 MEGOHM(S).
1384	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1384 MEGOHM(S) AT THE FIRST TEST TEMPERATURE.
1387	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1387 MEGHOM(S) AT THE SECOND TEST TEMPERATURE.
4050	CHANGE IN CHARACTERISTIC IMPEDANCE SHALL BE NOT GREATER THAN 4050 PERCENT.
4052	CHANGE IN ATTENUATION SHALL BE NOT GREATER THAN 4052 DECIBEL(S).
4054	ITEM SHALL MEET ATTENUATION ACCURACY REQUIREMENTS SPECIFIED.
1407	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1371
PER MIL-STD-202, METHOD 302.	1511
*CONDITION (SELECT ONE)	
TEST CONDITION (LETTER)	1378
TEST VOLTAGE (VOLTS, DC)	1373
ELECTRIFICATION TIME (SECONDS)	1376
MAXIMUM MEASUREMENT ERROR AT REQUIRED VALUE (PERCENT)	1377
POINTS OF MEASUREMENT:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	1497
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	1498
SPECIAL PREPARATIONS OR CONDITIONS ____	1520
FIRST TEST TEMPERATURE (DEGREES CELSIUS)	1372
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	1381
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1383

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1371	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.
1511	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 302 OF MIL-STD-202.
1378	TEST CONDITION LETTER 1378 SHALL APPLY.
1373	TEST POTENTIAL SHALL BE 1373 VOLTS, DC.
1376	ELECTRIFICATION DURATION SHALL BE 1376 SECOND(S).
1377	THE MEASUREMENT ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1377 PERCENT.
	POINTS OF INSULATION RESISTANCE MEASUREMENT SHALL BE AS FOLLOWS:
1497	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
1498	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
1520	SPECIAL PREPARATIONS OR CONDITIONS SHALL BE IN ACCORDANCE WITH 1520.
1372	FIRST TEST TEMPERATURE SHALL BE 1372 DEGREES CELSIUS.
1381	SECOND TEST TEMPERATURE SHALL BE 1381 DEGREES CELSIUS.
1383	TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1383 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LONGITUDINAL BALANCE TO GROUND	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1890
PER LONGITUDINAL BALANCE TO GROUND REQUIREMENTS TABLE.	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1884
PER MIL-A-13252.	1886
MOISTURE RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1400

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1890 LONGITUDINAL BALANCE TO GROUND. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1890.

LONGITUDINAL BALANCE TO GROUND. THE LONGITUDINAL BALANCE TO GROUND SHALL BE IN ACCORDANCE WITH THE LONGITUDINAL BALANCE TO GROUND TABLE.

LONGITUDINAL BALANCE TO GROUND REQUIREMENTS TABLE

ATTENUATOR SETTINGS(DB)	LONGITUDINAL BALANCE(DB)	LONGITUDINAL BAL (+OR-DB)	FREQUENCY RANGE(HZ) MINIMUM	MAXIMUM
3025	3026	3027	3028	3029
3030	3031	3032	3033	3034
3035	3036	3037	3038	3039
3040	3041	3042	3043	3044
3045	3046	3047	3048	3049

1884 LONGITUDINAL BALANCE TO GROUND. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1884.

1886 LONGITUDINAL BALANCE TO GROUND. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-A-13252.

1400 MOISTURE RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1400.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	1396
REMAIN WITHIN SPECIFIED TOLERANCE.	1398
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1394
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	1429
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	1404
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	1432
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	1406
MAXIMUM CHANGE IN CHARACTERISTIC IMPEDANCE (PERCENT)	4360
MAXIMUM CHANGE IN ATTENUATION (DECIBELS)	4362
ATTENUATION ACCURACY AS SPECIFIED.	4364

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1396	MOISTURE RESISTANCE. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
1398	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1394	THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING OR INSULATION BREAKDOWN, WHEN DIELECTRIC WITHSTANDING VOLTAGE IS APPLIED.
1429	CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1429 MILLIAMPERE(S) AT HIGH HUMIDITY.
1404	CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1404 MILLIAMPERE(S) AFTER DRYING.
1432	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1432 MEGOHM(S) AT HIGH HUMIDITY.
1406	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1406 MEGOHM(S) AFTER DRYING.
4360	CHANGE IN CHARACTERISTIC IMPEDANCE SHALL BE NOT GREATER THAN 4360 PERCENT.
4362	CHANGE IN ATTENUATION SHALL BE NOT GREATER THAN 4362 DECIBEL(S).
4364	ITEM SHALL MEET ATTENUATION ACCURACY REQUIREMENTS SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1391
PER MIL-STD-202, METHOD 106.	1397
POLARIZING VOLTAGE (VOLTS, DC)	1395
LOADING VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4981
(VOLTS, AC)	4980
PERCENT OF SAMPLE SUBJECTED TO POLARIZING VOLTAGE (PERCENT)	4991
STEP 7A NOT APPLICABLE.	4985
STEP 7B NOT APPLICABLE.	4986
MOUNTING ____	2316
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	4983
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	4984

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1391	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1391.
1397	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 106 OF MIL-STD-202.
1395	POLARIZING VOLTAGE SHALL BE 1395 VOLTS, DC.
4981	LOADING VOLTAGE SHALL BE 4981 VOLTS, DC.
4980	LOADING VOLTAGE SHALL BE 4980 VOLTS, AC.
4991	4991 PERCENT OF THE SAMPLE SHALL BE SUBJECTED TO THE POLARIZING VOLTAGE.
4985	STEP 7A OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
4986	STEP 7B OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
2316	MOUNTING SHALL BE 2316.
4983	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.
4984	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PEAK POWER	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1940
NO EVIDENCE OF PHYSICAL DAMAGE.	1942
MAXIMUM CHANGE IN ATTENUATION (DECIBELS)	1941
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1930
PER MIL-A-3933.	1932
APPLIED POWER (WATTS)	1934
DURATION OF APPLICATION (HOURS)	1936
RADIOGRAPHIC	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6291

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1940	PEAK POWER. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1940.
1942	PEAK POWER. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1941	CHANGE IN ATTENUATION SHALL BE NOT GREATER THAN 1941 DECIBEL(S).
1930	PEAK POWER. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1930.
1932	PEAK POWER. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-A-3933.
1934	THE APPLIED POWER SHALL BE 1934 WATT(S).
1936	THE DURATION SHALL BE 1936 HOUR(S).
6291	RADIOGRAPHIC. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6291.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RADIOGRAPHIC (CONT)	
REQUIREMENTS (CONT)	
NO INHOMOGENEITIES, FOREIGN PARTICLES, INCORRECT ALIGNMENT, DEFECTS.	6371
*DISPOSITION OF NEGATIVES OR RECORDS (SELECT ONE).	
DELIVERED.	4857
NOT DELIVERED.	4858
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6282
PER MIL-STD-202, METHOD 209.	4843
SOURCE-OBJECT DISTANCE (SELECT ONE)	
(METERS)	6286
(INCHES)	6285

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6371	RADIOGRAPHIC. THE EXAMINATION OF THE RADIOGRAPHS OF THE ITEMS SHALL SHOW: NO INHOMOGENEITIES, NO FOREIGN PARTICLES WITHIN THE ENCLOSURE, ALL PARTS CORRECTLY ALIGNED WITH EACH OTHER, NO DEFECTIVE WORKMANSHIP DETAILS, OR ANY OTHER DEFECTS SPECIFIED HEREIN. MANUFACTURERS SHALL PROVIDE A MEANS OF IDENTIFYING ITEMS ON THE NEGATIVES (OR NONFILM RECORDS, IF APPLICABLE).
4857	NEGATIVES (OR NONFILM RECORDS, IF APPLICABLE) SHALL BE DELIVERED WITH EACH SHIPMENT OF ITEMS.
4858	NEGATIVES (OR NONFILM RECORDS, IF APPLICABLE) SHALL BE MADE AVAILABLE FOR EXAMINATION UPON REQUEST.
6282	RADIOGRAPHIC. RADIOGRAPHIC INSPECTION SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6282.
4843	RADIOGRAPHIC. RADIOGRAPHIC INSPECTION SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 209 OF MIL-STD-202.
6286	THE SOURCE-OBJECT DISTANCE (THE DISTANCE FROM THE FOCAL SPOT OF THE X-RAY TUBE TO THE OBJECT BEING RADIOGRAPHED) SHALL BE 6286 METER(S).
6285	THE SOURCE-OBJECT DISTANCE (THE DISTANCE FROM THE FOCAL SPOT OF THE X-RAY TUBE TO THE OBJECT BEING RADIOGRAPHED) SHALL BE 6285 INCH(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RADIOGRAPHIC (CONT)	
PER MIL-STD-202, METHOD 209. (CONT)	
VIEWING EQUIPMENT (IDENTIFY) ____	6287
MAGNIFICATION (X-POWER)	6288
DEFECTS SOUGHT (IDENTIFY) ____	6289
NONFILM TECHNIQUES ALLOWED.	6284
PENETRAMETER WIRE SIZE (SELECT ONE)	
(AWG)	6283
(MILLIMETERS)	5297
RANDOM DROP	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4967

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6287	THE VIEWING EQUIPMENT SHALL BE 6287.
6288	THE IMAGES SHALL BE VIEWED AT 6288 X-POWER MAGNIFICATION.
6289	THE DEFECTS TO BE SOUGHT SHALL BE 6289.
6284	NONFILM TECHNIQUES MAY BE USED, IF DESIRED. RECORDS SHALL BE MAINTAINED, FOR EXAMINATION OR DELIVERY, AS SPECIFIED.
6283	TO FURTHER INSURE ADEQUATE QUALITY, A RADIOGRAPH OF THE PENETRAMETER SHALL BE INCLUDED ON EACH RADIOGRAPHIC FILM. THE PENETRAMETER SHALL BE MADE FROM A SAMPLE ITEM OF THE SAME TYPE AS THE ITEM BEING INSPECTED (RADIOGRAPHED). THE PENETRAMETER SHOULD UTILIZE AN AWG SIZE 6283 COPPER WIRE ON THE SIDE OF THE ITEM FARTHEST FROM THE X-RAY FILM.
5297	TO FURTHER INSURE ADEQUATE QUALITY, A RADIOGRAPH OF THE PENETRAMETER SHALL BE INCLUDED ON EACH RADIOGRAPHIC FILM. THE PENETRAMETER SHALL BE MADE FROM A SAMPLE ITEM OF THE SAME TYPE AS THE ITEM BEING INSPECTED (RADIOGRAPHED). THE PENETRAMETER SHOULD UTILIZE A 5297 MILLIMETER(S) DIAMETER COPPER WIRE ON THE SIDE OF THE ITEM FARTHEST FROM THE X-RAY FILM.
4967	RANDOM DROP. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4967.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RANDOM DROP (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.	4968
MAXIMUM CHANGE IN CHARACTERISTIC IMPEDANCE (PERCENT)	4174
MAXIMUM CHANGE IN ATTENUATION (DECIBELS)	4176
ATTENUATION ACCURACY AS SPECIFIED.	4178
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4963
PER MIL-STD-202, METHOD 203.	4972
RELIABILITY SCREENING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6929
NO EVIDENCE OF PHYSICAL DAMAGE.	6930

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4968	RANDOM DROP. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
4174	CHANGE IN CHARACTERISTIC IMPEDANCE SHALL BE NOT GREATER THAN 4174 PERCENT.
4176	CHANGE IN ATTENUATION SHALL BE NOT GREATER THAN 4176 DECIBEL(S).
4178	ITEM SHALL MEET ATTENUATION ACCURACY REQUIREMENTS SPECIFIED.
4963	RANDOM DROP. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4963.
4972	RANDOM DROP. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 203 OF MIL-STD-202.
6929	RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6929.
6930	RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RELIABILITY SCREENING (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
MAXIMUM CHANGE IN CHARACTERISTIC IMPEDANCE (PERCENT)	1959
MAXIMUM CHANGE IN ATTENUATION (DECIBELS)	1960
ATTENUATION ACCURACY AS SPECIFIED.	1961
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6696
PER MIL-STD-202, METHOD 108.	6697
*DURATION (SELECT ONE)	
TEST CONDITION (LETTER)	6698
(HOURS)	6699
*DUTY CYCLE (SELECT ONE)	
1.5 HOURS ON AND 0.5 HOUR OFF.	6710
STEADY STATE.	6713

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
1959	CHANGE IN CHARACTERISTIC IMPEDANCE SHALL BE NOT GREATER THAN 1959 PERCENT.
1960	CHANGE IN ATTENUATION SHALL BE NOT GREATER THAN 1960 DECIBEL(S).
1961	ITEM SHALL MEET ATTENUATION ACCURACY REQUIREMENTS SPECIFIED.
6696	RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6696.
6697	RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 108 OF MIL-STD-202.
6698	TEST CONDITION LETTER 6698 SHALL APPLY.
6699	DURATION OF THE TEST SHALL BE 6699 HOUR(S).
6710	DUTY CYCLE SHALL BE ONE AND ONE-HALF HOURS ON AND ONE-HALF HOUR OFF.
6713	DUTY CYCLE SHALL BE STEADY STATE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RELIABILITY SCREENING (CONT)	
PER MIL-STD-202, METHOD 108. (CONT)	
*TEST TEMPERATURE (DEGREES CELSIUS)	6700
*TOLERANCE (DEGREES CELSIUS)	6701
STILL AIR REQUIRED.	6923
POWER APPLIED TIMES RATED POWER (NUMBER)	6921
MAXIMUM VOLTAGE (VOLTS)	6939
TEST POTENTIAL (SELECT ONE)	
(VOLTS, AC)	6706
(VOLTS, DC)	6707
RESISTANCE TO SOLDERING HEAT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4700
NO EVIDENCE OF PHYSICAL DAMAGE.	4701
MAXIMUM CHANGE IN CHARACTERISTIC IMPEDANCE (PERCENT)	4100
MAXIMUM CHANGE IN ATTENUATION (DECIBELS)	4102
ATTENUATION ACCURACY AS SPECIFIED.	4104

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6700	TEST TEMPERATURE SHALL BE 6700 DEGREES CELSIUS.
6701	TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 6701 DEGREES CELSIUS.
6923	TEST CHAMBER SHALL HAVE STILL AIR.
6921	ITEM(S) SHALL BE TESTED AT 6921 TIMES THE RATED POWER.
6939	APPLIED VOLTAGE SHALL BE NOT GREATER THAN 6939 VOLTS.
6706	TEST POTENTIAL SHALL BE 6706 VOLTS, AC.
6707	TEST POTENTIAL SHALL BE 6707 VOLTS, DC.
4700	RESISTANCE TO SOLDERING HEAT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4700.
4701	RESISTANCE TO SOLDERING HEAT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4100	CHANGE IN CHARACTERISTIC IMPEDANCE SHALL BE NOT GREATER THAN 4100 PERCENT.
4102	CHANGE IN ATTENUATION SHALL BE NOT GREATER THAN 4102 DECIBEL(S).
4104	ITEM SHALL MEET ATTENUATION ACCURACY REQUIREMENTS SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO SOLDERING HEAT (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4689
PER MIL-STD-202, METHOD 210.	4698
*TEST CONDITION (LETTER)	4691
NUMBER OF TERMINATIONS TESTED (QUANTITY)	4694
DEPTH OF IMMERSION IN SOLDER (SELECT ONE)	
(INCHES)	4692
(MILLIMETERS)	4669
IMMERSION IN FLUX PERMITTED.	4671
SPECIAL PREPARATIONS PERMITTED.	4989
COOLING TIME (MINUTES)	4695
RESISTANCE TO SOLVENTS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4834
NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.	4830
MARKING SHALL REMAIN LEGIBLE.	4836

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4689	RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4689.
4698	RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 210 OF MIL-STD-202.
4691	TEST CONDITION LETTER 4691 SHALL APPLY.
4694	4694 TERMINATION(S) PER UNIT SHALL BE TESTED.
4692	DEPTH OF IMMERSION IN SOLDER SHALL BE 4692 INCH(S).
4669	DEPTH OF IMMERSION IN SOLDER SHALL BE 4669 MILLIMETER(S).
4671	IMMERSION OF TERMINATION IN FLUX SHALL BE PERMITTED.
4989	SPECIAL PREPARATION SHALL BE PERMITTED.
4695	COOLING TIME SHALL BE 4695 MINUTES PRIOR TO FINAL EXAMINATION AND MEASUREMENTS.
4834	RESISTANCE TO SOLVENTS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4834.
4830	RESISTANCE TO SOLVENTS. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
4836	MARKING SHALL REMAIN LEGIBLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO SOLVENTS (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4829
PER MIL-STD-202, METHOD 215.	4839
SOLVENTS TO BE ADDED (NAME)	4838
SOLVENTS TO BE DELETED (SUBPARAGRAPH LETTER)	4835
BRUSHED AREA (SELECT ONE)	
BRUSH MARKING AREA.	4831
ALL OF SPECIMEN TO BE BRUSHED.	6279
ROTATIONAL LIFE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1994
MAXIMUM CHANGE IN CHARACTERISTIC IMPEDANCE (PERCENT)	1996
ITEMS SHALL REMAIN WITHIN SPECIFIED TOLERANCE.	1998

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4829	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4829.
4839	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 215 OF MIL-STD-202. THE SPECIMENS SHALL BE DIVIDED INTO GROUPS OF EQUAL NUMBER TO THE EXTENT POSSIBLE.
4838	IN ADDITION TO THE SPECIFIED SOLVENT(S), 4838 SHALL ALSO BE USED.
4835	BRUSHING SHALL BE PERFORMED WITH THE SOLVENTS IN ACCORDANCE WITH METHOD 215 OF MIL-STD-202, EXCEPT THAT SOLUTION(S) 4835 SHALL NOT BE USED.-
4831	THE MARKING AREA SHALL BE BRUSHED.
6279	THE ENTIRE SURFACE SHALL BE BRUSHED.
1994	ROTATIONAL LIFE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1994.
1996	ROTATIONAL LIFE. THE CHANGE IN CHARACTERISTIC IMPEDANCE SHALL BE NOT GREATER THAN 1996 PERCENT.
1998	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ROTATIONAL LIFE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1978
PER MIL-STD-202, METHOD 206.	2210
*TEST CONDITION (LETTER)	1980
CYCLE RATE (CYCLES PER MINUTE)	1982
TEST VOLTAGE (SELECT ONE)	
(VOLTS AC)	1983
(VOLTS DC)	1984
FREQUENCY OF TEST VOLTAGE (HERTZ)	1985
TEMPERATURE (DEGREES CELSIUS)	1986
MINIMUM WIPER LOAD (KILOHMS)	1988
SALT SPRAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4878
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE.	4782

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1978	ROTATIONAL LIFE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1978.
2210	ROTATIONAL LIFE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 206 OF MIL-STD-202.
1980	TEST CONDITION LETTER 1980 SHALL APPLY.
1982	THE CYCLING RATE SHALL BE 1982 CYCLE(S) PER MINUTE.
1983	TEST VOLTAGE SHALL BE 1983 VOLT(S) AC.
1984	TEST VOLTAGE SHALL BE 1984 VOLT(S) DC.
1985	FREQUENCY OF THE TEST VOLTAGE SHALL BE 1985 HERTZ.
1986	THE TEST TEMPERATURE SHALL BE 1986 DEGREES CELSIUS.
1988	THE WIPER LOAD SHALL BE NOT LESS THAN 1988 KILOHM(S).
4878	SALT SPRAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4878.
4782	SALT SPRAY. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT SPRAY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4770
PER MIL-STD-202, METHOD 101.	4771
*TEST CONDITION (LETTER)	4772
MOUNTING (SELECT ONE)	
MOUNTING ____	2212
MOUNTING SHALL BE BY NORMAL METHOD.	4765
MOUNTING SHALL BE BY ANY SUITABLE METHOD.	4766
SAND AND DUST	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4958
NO EVIDENCE OF DUST PENETRATION.	4959
MAXIMUM CHANGE IN CHARACTERISTIC IMPEDANCE (PERCENT)	4106

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4770	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4770.
4771	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 101 OF MIL-STD-202.
4772	TEST CONDITION LETTER 4772 SHALL APPLY.
2212	MOUNTING SHALL BE 2212.
4765	MOUNTING SHALL BE BY THE NORMAL METHOD.
4766	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4958	SAND AND DUST. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4958.
4959	SAND AND DUST. THERE SHALL BE NO EVIDENCE OF DUST PENETRATION.
4106	CHANGE IN CHARACTERISTIC IMPEDANCE SHALL BE NOT GREATER THAN 4106 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SAND AND DUST (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4952
PER MIL-STD-202, METHOD 110.	4960
SPECIMEN ORIENTATION SHALL BE CHANGED DURING TEST.	1539
SECOND 6-HOUR TEST REQUIRED IMMEDIATELY FOLLOWING TEMPERATURE STABILIZATION IN STEP 2.	4956
SEAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4745
AS FOLLOWS:	6370
SPECIFIED TEST METHOD SENSITIVITY.	4746
NO BUBBLES INDICATIVE OF LEAKAGE.	4748
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4734

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4952	SAND AND DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4952.
4960	SAND AND DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 110 OF MIL-STD-202.
1539	ORIENTATION SHALL BE CHANGED DURING THE TEST.
4956	THE SECOND 6-HOUR TEST SHALL BE PERFORMED IMMEDIATELY AFTER REACHING TEMPERATURE STABILIZATION IN STEP 2.
4745	SEAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4745.
6370	SEAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
4746	THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE SPECIFIED TEST METHOD SENSITIVITY.
4748	THERE SHALL BE NO BUBBLES INDICATIVE OF LEAKAGE.
4734	SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4734.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 112.	4732
*TEST CONDITION LETTER	
LETTER A.	4737
LIQUID FOR BATH (NAME)	4738
MINIMUM BATH TEMPERATURE (DEGREES CELSIUS)	4739
LETTER B.	6320
LIQUID FOR BATH (NAME)	6321
MINIMUM BATH TEMPERATURE (DEGREES CELSIUS)	6322
LETTER C.	6323
*LEAK RATE SENSITIVITY (ATM CC/SEC)	4741
*TEST PROCEDURE (SELECT ONE)	
TEST PROCEDURE I.	4740
VACUUM PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	4742
(KILOPASCALS)	4736

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4732	SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 112 OF MIL-STD-202.
4737	TEST CONDITION LETTER A SHALL APPLY.
4738	LIQUID FOR BUBBLE TEST BATH SHALL BE 4738.
4739	TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 4739 DEGREES CELSIUS.
6320	TEST CONDITION LETTER B SHALL APPLY.
6321	LIQUID FOR BUBBLE TEST BATH SHALL BE 6321.
6322	TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 6322 DEGREES CELSIUS.
6323	TEST CONDITION LETTER C SHALL APPLY.
4741	LEAK SENSITIVITY RATE SHALL BE 4741 ATM CC/SEC.
4740	PROCEDURE NUMBER I SHALL APPLY.
4742	VACUUM PRESSURE SHALL BE 4742 POUNDS PER SQUARE INCH.
4736	VACUUM PRESSURE SHALL BE 4736 KILOPASCALS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
TEST PROCEDURE (CONT)	
TEST PROCEDURE II.	6324
BACKFILL PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	6325
(KILOPASCALS)	6326
NUMBER OF PRESSURE CYCLES (QUANTITY)	4749
TEST PROCEDURE III.	6328
GROSS LEAK TEST CONDITION (LETTER)	4750
TEST PROCEDURE IV.	6329
CHAMBER PRESSURE (SELECT ONE)	
(TORR)	4751
(KILOPASCALS)	4735
DURATION OF REDUCED PRESSURE (MINUTES)	4752
GROSS LEAK TEST CONDITION (LETTER)	6330
LETTER D.	6331
ANY SUITABLE MOUNTING METHOD.	4743

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6324	PROCEDURE NUMBER II SHALL APPLY.
6325	BACKFILL PRESSURE SHALL BE 6325 POUNDS PER SQUARE INCH.
6326	BACKFILL PRESSURE SHALL BE 6326 KILOPASCALS.
4749	THERE SHALL BE 4749 PRESSURE CYCLE(S).
6328	PROCEDURE NUMBER III SHALL APPLY.
4750	GROSS LEAK TEST CONDITION LETTER 4750 SHALL APPLY.
6329	PROCEDURE NUMBER IV SHALL APPLY.
4751	CHAMBER PRESSURE SHALL BE 4751 TORR.
4735	CHAMBER PRESSURE SHALL BE 4735 KILOPASCALS.
4752	DURATION AT LOW PRESSURE SHALL BE 4752 MINUTE(S).
6330	GROSS LEAK TEST CONDITION LETTER 6330 SHALL APPLY.
6331	TEST CONDITION LETTER D SHALL APPLY.
4743	MOUNTING SHALL BE BY ANY SUITABLE METHOD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
TEST CONDITION LETTER (CONT)	
LETTER E.	6332
ANY SUITABLE MOUNTING METHOD.	6333
SENSITIVITY OF ATTENUATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3072
AS FOLLOWS:	2214
MAXIMUM FREQUENCY SENSITIVITY (DECIBELS PER HERTZ)	3073
MAXIMUM POWER SENSITIVITY (DECIBELS PER WATT)	3674
MAXIMUM TEMPERATURE SENSITIVITY (DECIBELS PER DEGREE CELSIUS)	3075
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3052

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6332	TEST CONDITION LETTER E SHALL APPLY.
6333	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
3072	SENSITIVITY OF ATTENUATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3072.
2214	SENSITIVITY OF ATTENUATION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3073	THE FREQUENCY SENSITIVITY SHALL BE NOT GREATER THAN 3073 DECIBELS PER HERTZ.
3674	THE POWER SENSITIVITY OF ATTENUATION SHALL BE NOT GREATER THAN 3674 DECIBELS PER WATT.
3075	THE TEMPERATURE SENSITIVITY OF ATTENUATION SHALL BE NOT GREATER THAN 3075 DECIBELS PER DEGREE CELSIUS.
3052	SENSITIVITY OF ATTENUATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3052.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SENSITIVITY OF ATTENUATION (CONT)	
TEST METHODS (CONT)	
PER MIL-A-3933.	3054
TEST FREQUENCY MINIMUM (SELECT ONE)	
(DC)	3056
(HERTZ)	3057
(KILOHERTZ)	3058
(MEGAHERTZ)	3060
(GIGAHERTZ)	2070
TEST FREQUENCY MAXIMUM (SELECT ONE)	
(HERTZ)	3062
(KILOHERTZ)	3063
(MEGAHERTZ)	3064
(GIGAHERTZ)	2072
REFERENCE INPUT POWER (WATTS)	3065
TEST TEMPERATURE	
MINIMUM (DEGREES CELSIUS)	3068
*MAXIMUM (DEGREES CELSIUS)	3070

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3054	SENSITIVITY OF ATTENUATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-A-3933.
3056	THE MINIMUM TEST FREQUENCY SHALL BE DC.
3057	THE MINIMUM TEST FREQUENCY SHALL BE 3057 HERTZ.
3058	THE MINIMUM TEST FREQUENCY SHALL BE 3058 KILOHERTZ.
3060	THE MINIMUM TEST FREQUENCY SHALL BE 3060 MEGAHERTZ.
2070	THE MINIMUM TEST FREQUENCY SHALL BE 2070 GIGAHERTZ.
3062	THE MAXIMUM TEST FREQUENCY SHALL BE 3062 HERTZ.
3063	THE MAXIMUM TEST FREQUENCY SHALL BE 3063 KILOHERTZ.
3064	THE MAXIMUM TEST FREQUENCY SHALL BE 3064 MEGAHERTZ.
2072	THE MAXIMUM TEST FREQUENCY SHALL BE 2072 GIGAHERTZ.
3065	THE REFERENCE INPUT POWER SHALL BE 3065 WATT(S).
3068 3070	THE TEMPERATURE RANGE SHALL BE FROM 3068 TO 3070 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, HIGH IMPACT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1494
NO EVIDENCE OF PHYSICAL DAMAGE.	1495
MAXIMUM CHANGE IN CHARACTERISTIC IMPEDANCE (PERCENT)	4108
MAXIMUM CHANGE IN ATTENUATION (DECIBELS)	4110
ATTENUATION ACCURACY AS SPECIFIED.	4112
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1486
PER MIL-STD-202, METHOD 207.	1482
*MOUNTING FIXTURE (SELECT ONE)	
FIGURE NUMBER FROM METHOD 207 OF MIL-STD-202 (NUMBER)	1488
ANY SUITABLE MOUNTING FIXTURE.	1478
MOUNTING FIXTURE ____	2220

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1494	SHOCK, HIGH IMPACT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1494.
1495	SHOCK, HIGH IMPACT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4108	CHANGE IN CHARACTERISTIC IMPEDANCE SHALL BE NOT GREATER THAN 4108 PERCENT.
4110	CHANGE IN ATTENUATION SHALL BE NOT GREATER THAN 4110 DECIBEL(S).
4112	ITEM SHALL MEET ATTENUATION ACCURACY REQUIREMENTS SPECIFIED.
1486	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1486.
1482	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 207 OF MIL-STD-202.
1488	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH FIGURE

ANY SUITABLE MOUNTING FIXTURE.	1478
MOUNTING FIXTURE ____	2220

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, SPECIFIED PULSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1508
NO EVIDENCE OF PHYSICAL DAMAGE.	1509
MAXIMUM CHANGE IN CHARACTERISTIC IMPEDANCE (PERCENT)	4114
MAXIMUM CHANGE IN ATTENUATION (DECIBELS)	4116
ATTENUATION ACCURACY AS SPECIFIED.	4118
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1502
PER MIL-STD-202, METHOD 213.	1500
*TEST CONDITION (LETTER)	1504
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	4686
NORMAL MOUNTING METHOD.	4685
MOUNTING ____	2222

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1508	SHOCK, SPECIFIED PULSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1508.
1509	SHOCK, SPECIFIED PULSE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4114	CHANGE IN CHARACTERISTIC IMPEDANCE SHALL BE NOT GREATER THAN 4114 PERCENT.
4116	CHANGE IN ATTENUATION SHALL BE NOT GREATER THAN 4116 DECIBEL(S).
4118	ITEM SHALL MEET ATTENUATION ACCURACY REQUIREMENTS SPECIFIED.
1502	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1502.
1500	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 213 OF MIL-STD-202.
1504	TEST CONDITION LETTER 1504 SHALL APPLY.
4686	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4685	MOUNTING SHALL BE BY THE NORMAL METHOD.
2222	MOUNTING SHALL BE 2222.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SOLDERABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4674
NO EVIDENCE OF PHYSICAL DAMAGE.	4675
MEET EVALUATION CRITERIA SPECIFIED IN METHOD 208 OF MIL-STD-202.	4672
MAXIMUM CHANGE IN CHARACTERISTIC IMPEDANCE (PERCENT)	4130
MAXIMUM CHANGE IN ATTENUATION (DECIBELS)	4132
ATTENUATION ACCURACY AS SPECIFIED.	4134
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4662
PER MIL-STD-202, METHOD 208.	4683
NUMBER OF TERMINALS TO BE TESTED (QUANTITY)	4666

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4674	SOLDERABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4674.
4675	SOLDERABILITY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4672	THE RESULTS OF THE SOLDERABILITY TEST SHALL BE IN ACCORDANCE WITH THE ACCEPTANCE CRITERIA OF METHOD 208 OF MIL-STD-202.
4130	CHANGE IN CHARACTERISTIC IMPEDANCE SHALL BE NOT GREATER THAN 4130 PERCENT.
4132	CHANGE IN ATTENUATION SHALL BE NOT GREATER THAN 4132 DECIBEL(S).
4134	ITEM SHALL MEET ATTENUATION ACCURACY REQUIREMENTS SPECIFIED.
4662	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4662.
4683	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 208 OF MIL-STD-202.
4666	4666 TERMINATION(S) PER UNIT SHALL BE TESTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SOLDERABILITY (CONT)	
PER MIL-STD-202, METHOD 208. (CONT)	
DEPTH OF IMMERSION (SELECT ONE)	
(INCHES)	4667
(MILLIMETERS)	4663
DISTANCE WRAP WIRE APPLIED FROM BODY (SELECT ONE)	
(INCHES)	4664
(MILLIMETERS)	4665
SPECIAL PREPARATIONS PERMITTED.	6205
TEMPERATURE, HIGH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6228
NO EVIDENCE OF PHYSICAL DAMAGE.	6229
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6217
PER MIL-STD-810, METHOD 501.	6218

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4667	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4667 INCH(S).
4663	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4663 MILLIMETER(S).
4664	THE WRAP WIRE SHALL BE 4664 INCH(S) FROM THE BODY.
4665	THE WRAP WIRE SHALL BE 4665 MILLIMETER(S) FROM THE BODY.
6205	SPECIAL PREPARATION SHALL BE PERMITTED.
6228	TEMPERATURE, HIGH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6228.
6229	TEMPERATURE, HIGH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6217	TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6217.
6218	TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 501 OF MIL-STD-810.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, HIGH (CONT)	
PER MIL-STD-810, METHOD 501. (CONT)	
*PROCEDURE (ROMAN NUMERAL)	6219
STORAGE TEMPERATURE (DEGREES CELSIUS)	6220
STORAGE DURATION (HOURS)	6221
HIGHEST OPERATING TEMPERATURE (DEGREES CELSIUS)	6222
OPERATION TIME (SELECT ONE)	
(MINUTES)	6224
(HOURS)	6225
TEMPERATURE, LOW	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6318
NO EVIDENCE OF PHYSICAL DAMAGE.	6319
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6231
PER MIL-STD-810, METHOD 502.	6232

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6219	PROCEDURE NUMBER 6219 SHALL APPLY.
6220	STORAGE TEMPERATURE SHALL BE 6220 DEGREES CELSIUS.
6221	STORAGE DURATION SHALL BE 6221 HOUR(S).
6222	HIGHEST OPERATING TEMPERATURE SHALL BE 6222 DEGREES CELSIUS.
6224	OPERATING TIME SHALL BE 6224 MINUTE(S).
6225	OPERATING TIME SHALL BE 6225 HOUR(S).
6318	TEMPERATURE, LOW. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6318.
6319	TEMPERATURE, LOW. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6231	TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6231.
6232	TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 502 OF MIL-STD-810.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, LOW (CONT)	
PER MIL-STD-810, METHOD 502. (CONT)	
STORAGE TEMPERATURE (DEGREES CELSIUS)	6234
STORAGE DURATION (HOURS)	6235
LOWEST OPERATING TEMPERATURE (DEGREES CELSIUS)	6236
CHAMBER AIR VELOCITY	
(FEET PER SECOND)	6237
(METERS PER SECOND)	6238
OPERATION TIME (SELECT ONE)	
(MINUTES)	6315
(HOURS)	6316
TERMINAL STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1418
NO EVIDENCE OF PHYSICAL DAMAGE.	1433
MAXIMUM CHANGE IN CHARACTERISTIC IMPEDANCE (PERCENT)	4136

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6234	STORAGE TEMPERATURE SHALL BE 6234 DEGREES CELSIUS.
6235	STORAGE DURATION SHALL BE 6235 HOUR(S).
6236	LOWEST OPERATING TEMPERATURE SHALL BE 6236 DEGREES CELSIUS.
6237	CHAMBER AIR VELOCITY SHALL BE 6237 FEET PER SECOND.
6238	CHAMBER AIR VELOCITY SHALL BE 6238 METERS PER SECOND.
6315	OPERATING TIME SHALL BE 6315 MINUTE(S).
6316	OPERATING TIME SHALL BE 6316 HOUR(S).
1418	TERMINAL STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1418.
1433	TERMINAL STRENGTH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4136	CHANGE IN CHARACTERISTIC IMPEDANCE SHALL BE NOT GREATER THAN 4136 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINAL STRENGTH (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
MAXIMUM CHANGE IN ATTENUATION (DECIBELS)	4138
ATTENUATION ACCURACY AS SPECIFIED.	4140
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1410
PER MIL-STD-202, METHOD 211.	1375
*TEST CONDITIONS	
TEST CONDITION A, APPLIED FORCE (SELECT ONE)	
(POUNDS)	1411
(NEWTONS)	1419
TEST CONDITION B, BENDS (NUMBER)	1412
TEST CONDITION C, LOAD (SELECT ONE)	
(POUNDS)	1413
(KILOGRAMS)	1420

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4138	CHANGE IN ATTENUATION SHALL BE NOT GREATER THAN 4138 DECIBEL(S).
4140	ITEM SHALL MEET ATTENUATION ACCURACY REQUIREMENTS SPECIFIED.
1410	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1410.
1375	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 211 OF MIL-STD-202.
1411	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1411 POUND(S).
1419	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1419 NEWTON(S).
1412	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION B. THERE SHALL BE 1412 BEND(S).
1413	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1413 POUND(S).
1420	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1420 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINAL STRENGTH (CONT)	
TEST CONDITIONS (CONT)	
TEST CONDITION D.	1414
TEST CONDITION E, TORQUE (SELECT ONE)	
(POUND-INCHES)	1416
(NEWTON METERS)	1421
THERMAL SHOCK (TEMPERATURE CYCLING)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4722
NO EVIDENCE OF PHYSICAL DAMAGE.	4723
MAXIMUM CHANGE IN CHARACTERISTIC IMPEDANCE (PERCENT)	4142
MAXIMUM CHANGE IN ATTENUATION (DECIBELS)	4144
ATTENUATION ACCURACY AS SPECIFIED.	4146
TEMPERATURE COEFFICIENT AS SPECIFIED.	4147

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1414	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION D.
1416	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1416 POUND-INCH(S).
1421	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1421 NEWTON METER(S).
4722	THERMAL SHOCK (TEMPERATURE CYCLING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4722.
4723	THERMAL SHOCK (TEMPERATURE CYCLING). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4142	CHANGE IN CHARACTERISTIC IMPEDANCE SHALL BE NOT GREATER THAN 4142 PERCENT.
4144	CHANGE IN ATTENUATION SHALL BE NOT GREATER THAN 4144 DECIBEL(S).
4146	ITEM SHALL MEET ATTENUATION ACCURACY REQUIREMENTS SPECIFIED.
4147	THE TEMPERATURE COEFFICIENT SHALL MEET THE REQUIREMENTS SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THERMAL SHOCK (TEMPERATURE CYCLING) (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4713
PER MIL-STD-202, METHOD 107.	4714
*TEST CONDITION (LETTER)	4715
MOUNTING ____	2224
MEASURE TEMPERATURE COEFFICIENT AT TEMPERATURE EXTREMES.	4143
VIBRATION, HIGH FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1455
NO EVIDENCE OF PHYSICAL DAMAGE.	1456
MAXIMUM CHANGE IN CHARACTERISTIC IMPEDANCE (PERCENT)	4150
MAXIMUM CHANGE IN ATTENUATION (DECIBELS)	4152
ATTENUATION ACCURACY AS SPECIFIED.	4154

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
4713	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4713.
4714	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 107 OF MIL-STD-202.
4715	TEST CONDITION LETTER 4715 SHALL APPLY.
2224	MOUNTING SHALL BE 2224.
4143	MEASURE TEMPERATURE COEFFICIENT AT TEMPERATURE EXTREMES.
1455	VIBRATION, HIGH FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1455.
1456	VIBRATION, HIGH FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4150	CHANGE IN CHARACTERISTIC IMPEDANCE SHALL BE NOT GREATER THAN 4150 PERCENT.
4152	CHANGE IN ATTENUATION SHALL BE NOT GREATER THAN 4152 DECIBEL(S).
4154	ITEM SHALL MEET ATTENUATION ACCURACY REQUIREMENTS SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, HIGH FREQUENCY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1446
PER MIL-STD-202, METHOD 204.	1447
*TEST CONDITION (LETTER)	1448
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4709
NORMAL MOUNTING METHOD.	4708
MOUNTING ____	2226
METHOD OF DETERMINING MECHANICAL RESONANCE (SELECT ONE)	
VISUALLY BY MEANS OF A STROBOTAC.	1533
ELECTRICAL OUTPUT INDICATORS.	1534
VIBRATION, LOW FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1475

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1446	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1446.
1447	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 204 OF MIL-STD-202.
1448	TEST CONDITION LETTER 1448 SHALL APPLY.
4709	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4708	MOUNTING SHALL BE BY THE NORMAL METHOD.
2226	MOUNTING SHALL BE 2226.
1533	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE VISUALLY BY MEANS OF A STROBOTAC.
1534	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE BY ELECTRICAL OUTPUT INDICATORS.
1475	VIBRATION, LOW FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1475.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE.	1476
MAXIMUM CHANGE IN CHARACTERISTIC IMPEDANCE (PERCENT)	4158
MAXIMUM CHANGE IN ATTENUATION (DECIBELS)	4160
ATTENUATION ACCURACY AS SPECIFIED.	4162
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1466
PER MIL-STD-202, METHOD 201.	1467
DURATION OF VIBRATION PER AXIS (HOURS)	1470
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4731
NORMAL MOUNTING METHOD.	4730
MOUNTING ____	2228
DIRECTION OF MOTION	
PARALLEL TO LONGITUDINAL AXIS.	1535

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1476	VIBRATION, LOW FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4158	CHANGE IN CHARACTERISTIC IMPEDANCE SHALL BE NOT GREATER THAN 4158 PERCENT.
4160	CHANGE IN ATTENUATION SHALL BE NOT GREATER THAN 4160 DECIBEL(S).
4162	ITEM SHALL MEET ATTENUATION ACCURACY REQUIREMENTS SPECIFIED.
1466	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1466.
1467	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 201 OF MIL-STD-202.
1470	DURATION OF TEST SHALL BE 1470 HOUR(S) PER AXIS.
4731	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4730	MOUNTING SHALL BE BY THE NORMAL METHOD.
2228	MOUNTING SHALL BE 2228.
1535	THE DIRECTION OF MOTION SHALL BE PARALLEL TO THE LONGITUDINAL AXIS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY (CONT)	
DIRECTION OF MOTION (CONT)	
PERPENDICULAR TO LONGITUDINAL AXIS.	1536
ON THE CENTERLINE OF MOST SENSITIVE AXIS.	4979
90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.	4978
THREE MUTUALLY PERPENDICULAR DIRECTIONS.	1537
VIBRATION, RANDOM	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1435
NO EVIDENCE OF PHYSICAL DAMAGE.	1436
REMAIN WITHIN SPECIFIED TOLERANCE.	1538
MAXIMUM CHANGE IN CHARACTERISTIC IMPEDANCE (PERCENT)	4166
MAXIMUM CHANGE IN ATTENUATION (DECIBELS)	4168
ATTENUATION ACCURACY AS SPECIFIED.	4170

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1536	THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE LONGITUDINAL AXIS.
4979	THE DIRECTION OF MOTION SHALL BE ON THE CENTERLINE OF THE MOST SENSITIVE AXIS.
4978	THE DIRECTION OF MOTION SHALL BE 90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.
1537	THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUALLY PERPENDICULAR DIRECTIONS.
1435	VIBRATION, RANDOM. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1435.
1436	VIBRATION, RANDOM. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1538	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4166	CHANGE IN CHARACTERISTIC IMPEDANCE SHALL BE NOT GREATER THAN 4166 PERCENT.
4168	CHANGE IN ATTENUATION SHALL BE NOT GREATER THAN 4168 DECIBEL(S).
4170	ITEM SHALL MEET ATTENUATION ACCURACY REQUIREMENTS SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1426
PER MIL-STD-202, METHOD 214.	1427
*TEST CONDITION (ROMAN NUMERAL AND LETTER)	1428
*DURATION OF APPLICATION (SELECT ONE)	
(MINUTES)	1438
(HOURS)	1431
MONITORING INSTRUMENTATION OF EXCITATION (SELECT ONE)	
ANY SUITABLE SYSTEM.	1452
CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.	1453
CALIBRATED OSCILLOSCOPE.	1459
NUMBER OF VIBRATION MONITORING TEST POINTS (QUANTITY)	1430

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1426	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1426.
1427	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 214 OF MIL-STD-202.
1428	TEST CONDITION NUMBER AND LETTER 1428 SHALL APPLY.
1438	THE DURATION OF THE TEST SHALL BE 1438 MINUTE(S).
1431	THE DURATION OF THE TEST SHALL BE 1431 HOUR(S).
1452	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE ANY SUITABLE INSTRUMENTATION SYSTEM.
1453	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.
1459	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED OSCILLOSCOPE.
1430	THERE SHALL BE 1430 VIBRATION MONITORING POINT(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
PER MIL-STD-202, METHOD 214. (CONT)	
LOCATION OF MONITORING POINTS (SELECT ONE)	
ANY SUITABLE LOCATION.	1439
AS CLOSE AS PRACTICAL TO TEST SPECIMEN.	1462
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4977
NORMAL MOUNTING METHOD.	4976
MOUNTING _____	2230
VOLTAGE STANDING WAVE RATIO (VSWR)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2234
MAXIMUM (NUMBER)	2236
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2240
PER MIL-A-3933.	2242

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1439	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE ANY SUITABLE LOCATION.
1462	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE AS CLOSE AS PRACTICAL TO THE TEST SPECIMEN(S).
4977	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4976	MOUNTING SHALL BE BY THE NORMAL METHOD.
2230	MOUNTING SHALL BE 2230.
2234	VOLTAGE STANDING WAVE RATIO (VSWR). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2234.
2236	VOLTAGE STANDING WAVE RATIO (VSWR). THE VSWR SHALL BE NOT GREATER THAN 2236.
2240	VOLTAGE STANDING WAVE RATIO (VSWR). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2240.
2242	VOLTAGE STANDING WAVE RATIO (VSWR). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-A-3933.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VOLTAGE STANDING WAVE RATIO (VSWR) (CONT)	
PER MIL-A-3933. (CONT)	
FREQUENCY (SELECT ONE)	
MINIMUM (GIGAHERTZ)	2244
*MAXIMUM (GIGAHERTZ)	2246
NOMINAL (GIGAHERTZ)	2248
VSWR SHALL BE MEASURED AT BOTH ENDS.	2247
STORAGE CONDITIONS	
(YEARS)	1529
CERTIFY MAXIMUM CURE DATE TO DELIVERY (QUARTERS)	4942
CERTIFY MINIMUM SHELF LIFE AFTER DELIVERY (QUARTERS)	4943
CERTIFY MAXIMUM MANUFACTURE DATE TO DELIVERY (QUARTERS)	4944
AGE LIMITATION PER MIL-STD-1523.	5209
PERFORMANCE CHARACTERISTICS (SEE TABLE XII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE XII IS USED.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2244 2246	THE FREQUENCY RANGE SHALL BE 2244 TO 2246 GIGAHERTZ.
2248	THE NOMINAL FREQUENCY SHALL BE 2248 GIGAHERTZ.
2247	VSWR SHALL BE MEASURED AT EACH END OF ATTENUATOR.
	STORAGE CONDITIONS.
1529	ITEMS SHALL WITHSTAND 1529 YEARS OF STORAGE WHEN PROPERLY PRESERVED, PACKAGED AND MECHANICALLY PROTECTED WITHOUT REQUIRING MAJOR REPAIR.
4942	MANUFACTURER SHALL CERTIFY THAT THE CURE DATE SHALL BE NOT GREATER THAN 4942 QUARTERS PRIOR TO DELIVERY DATE.
4943	MANUFACTURER SHALL CERTIFY THAT THERE SHALL BE NOT LESS THAN 4943 QUARTERS OF SHELF LIFE AFTER DELIVERY.
4944	MANUFACTURER SHALL CERTIFY THAT THE DATE OF MANUFACTURE SHALL BE NOT GREATER THAN 4944 QUARTERS PRIOR TO DATE OF DELIVERY.
5209	AGE LIMITATIONS OF THE FINISHED PRODUCT SHALL BE IN ACCORDANCE WITH MIL-STD-1523.

PERFORMANCE CHARACTERISTICS. PERFORMANCE CHARACTERISTICS SHALL BE AS SHOWN IN THE PERFORMANCE CHARACTERISTICS TABLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADDITIONAL PART MARKING	
A_____	6991
B_____	6992
C_____	6993
D_____	6994
E_____	6995
DEFINITION OF HERMETIC SEALING	
NOTE: AUTOMATIC WHEN CODE 1686 IS USED TO REQUIRE HERMETIC SEALING.	
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

DEFINITION OF HERMETIC SEALING. FOR THE PURPOSE OF THIS DOCUMENT, A HERMETICALLY-SEALED ITEM IS ONE IN WHICH THE ELEMENT IS CONTAINED WITHIN A SEALED ENCLOSURE OF CERAMIC, GLASS OR METAL, OR A COMBINATION THEREOF, WHERE SEALING IS ACCOMPLISHED BY MATERIAL FUSION, WELDING, BRAZING OR SOLDERING.

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI


(Project EDS-A289)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.


APPENDIX A

ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

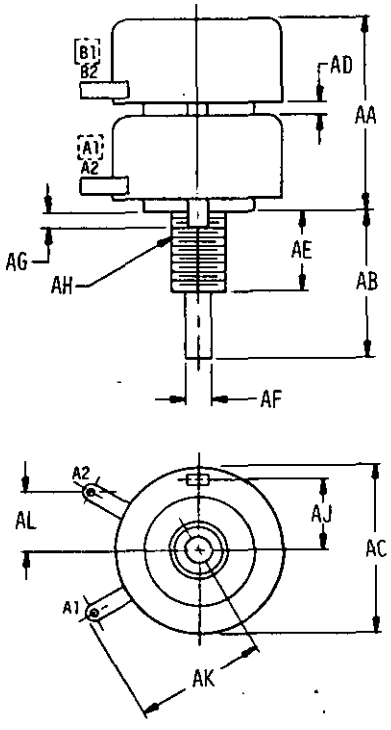


096-01-1

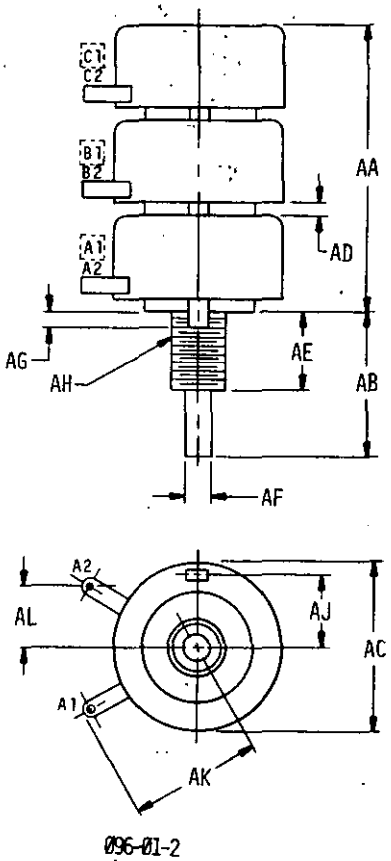


096-01-2

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

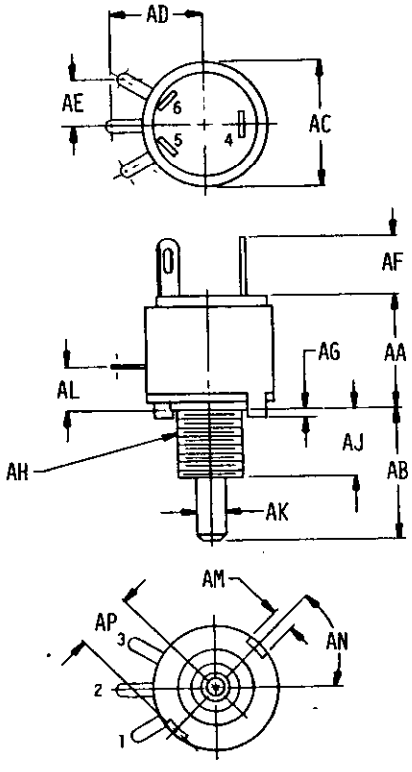


Ø96-Ø2-1

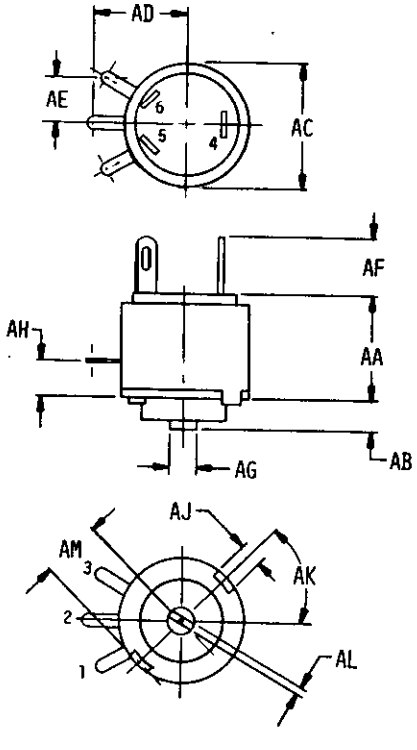


Ø96-Ø2-2

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

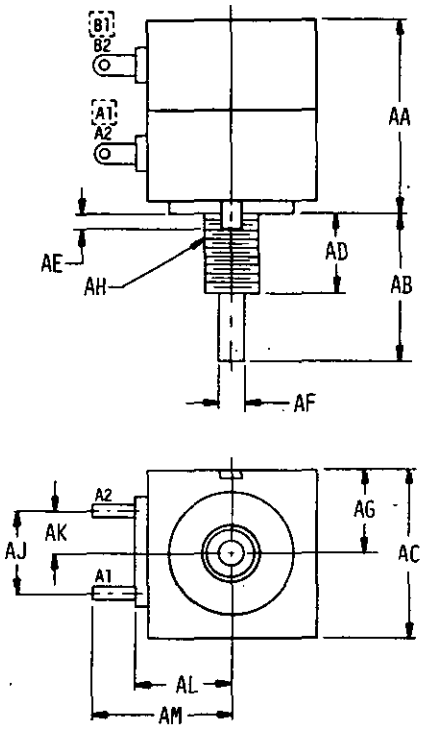


096-03-1

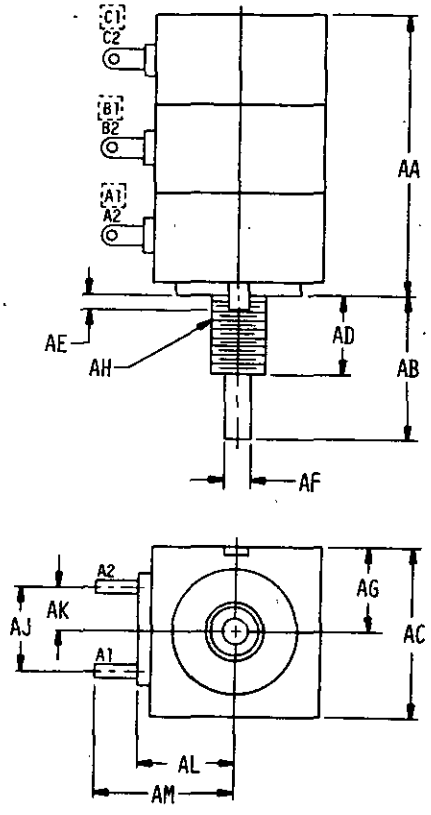

096-03-2


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

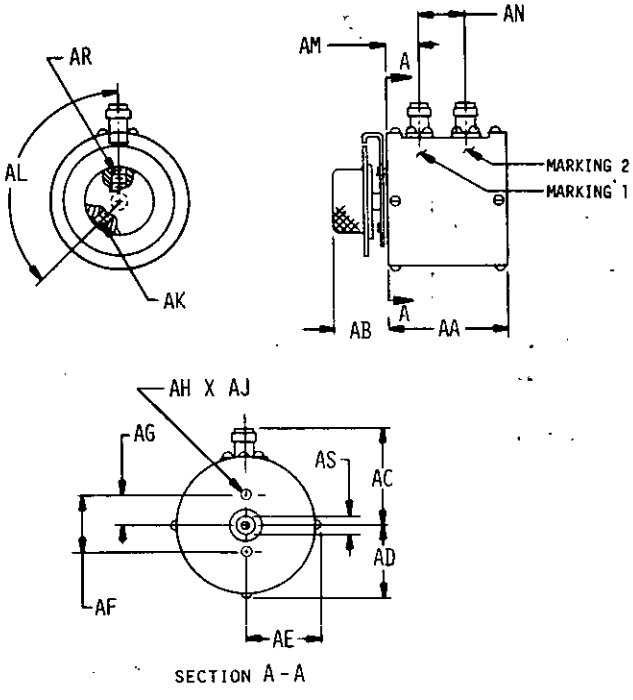

SECTION A-A


096-03-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

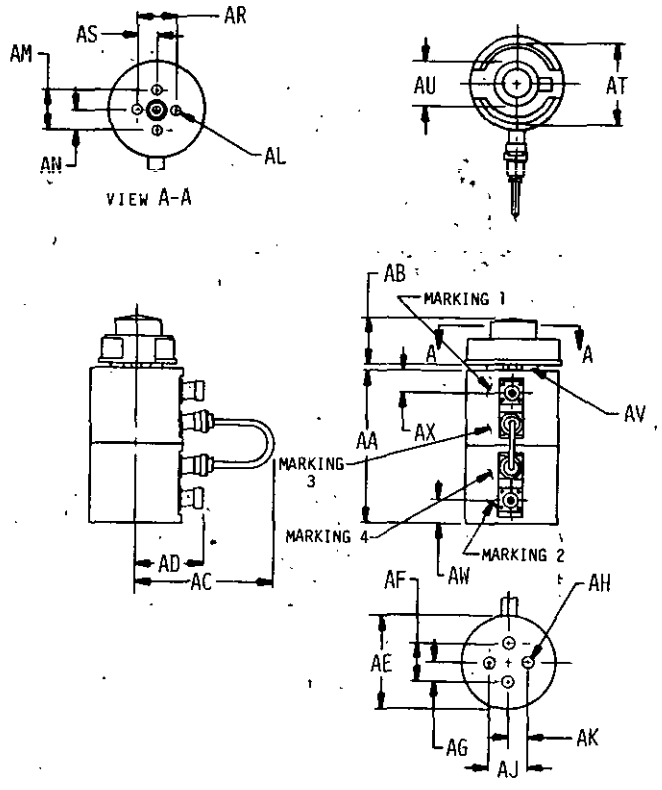


096-03-4

Source: https://assist.dla.mil/ -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

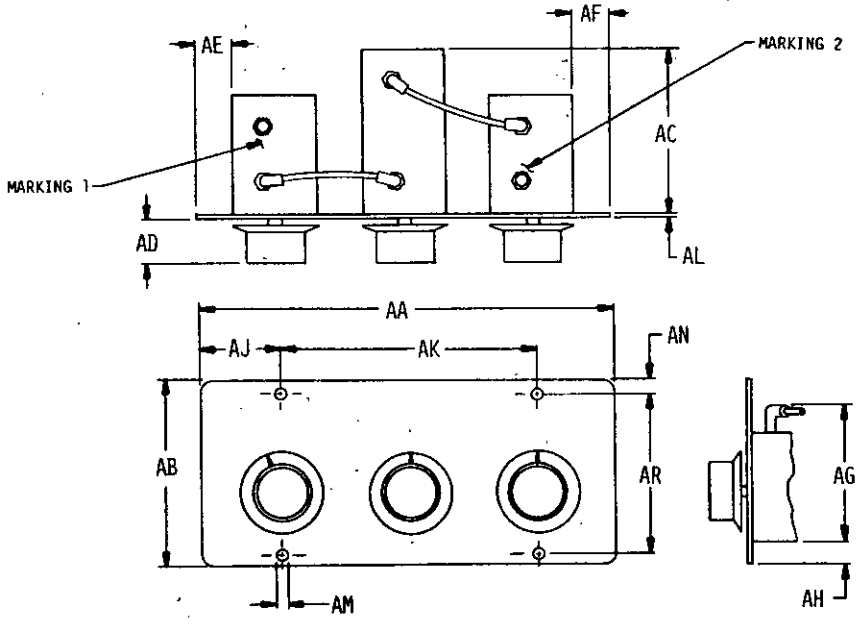


096-03-5


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

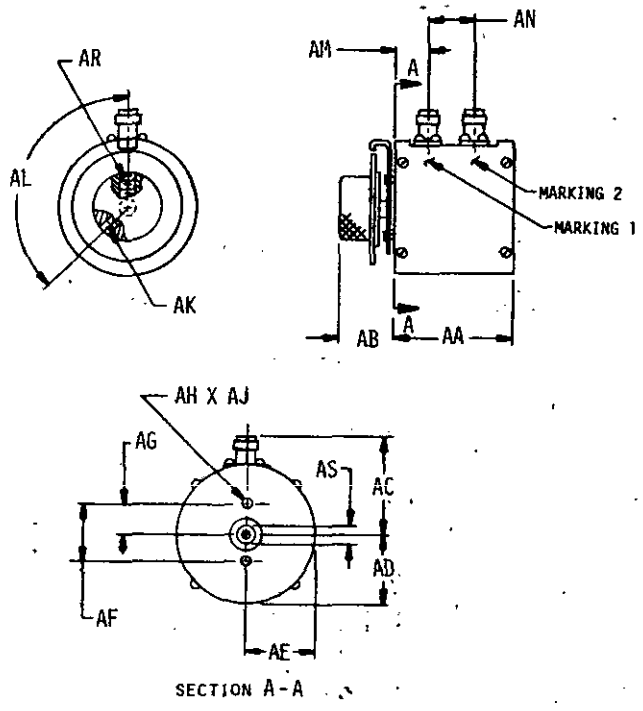


096-03-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

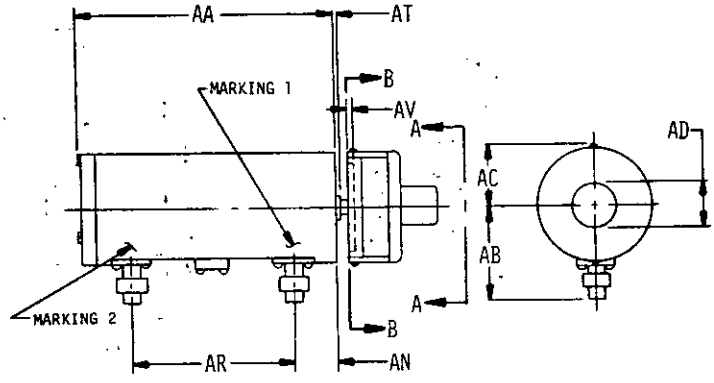




VIEW A-A
KNOB ASSY REMOVED




SECTION B-B

096-03-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

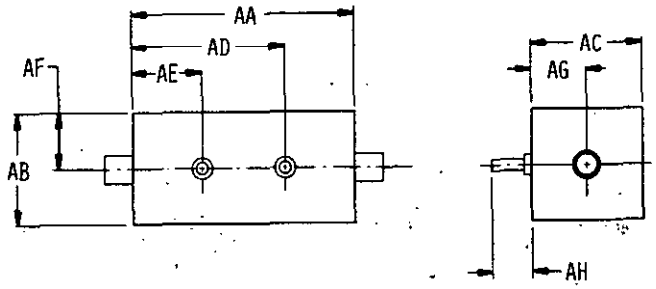


096-04-1

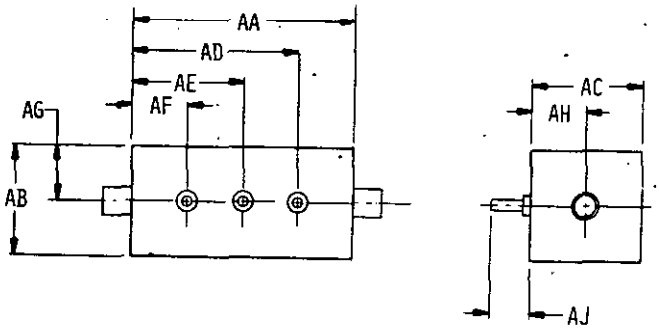


096-04-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

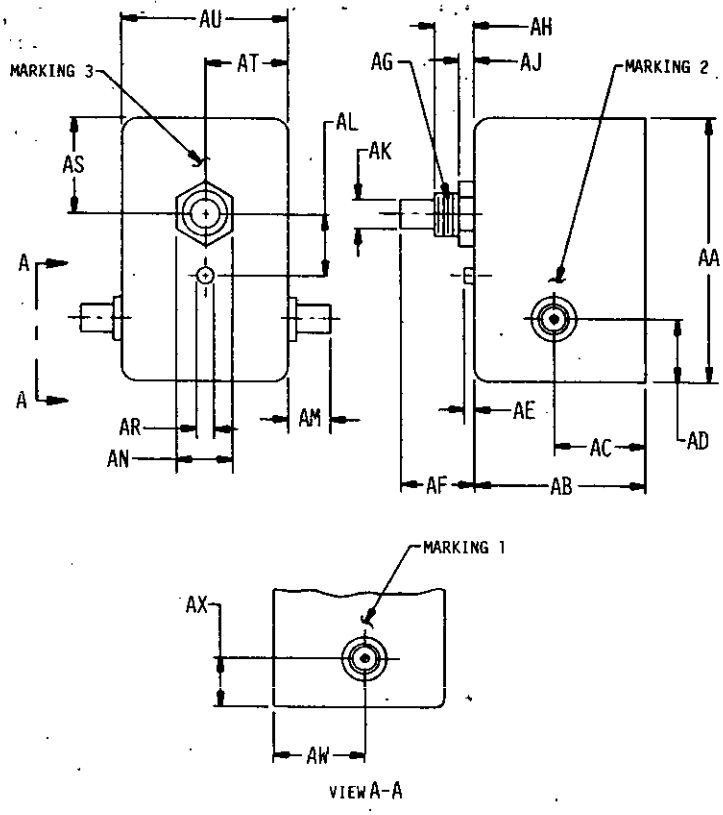


096-04-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

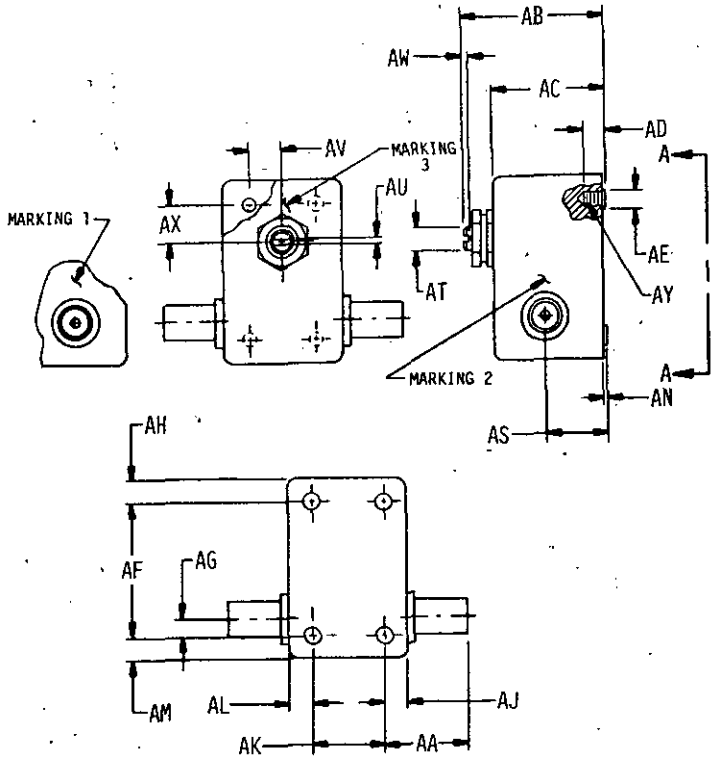


VIEW A-A

096-04-4

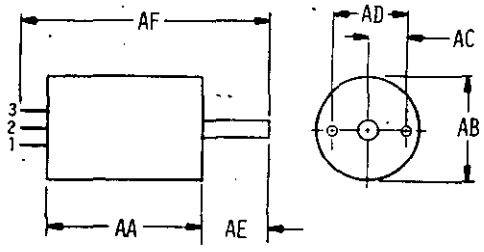


096-05-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

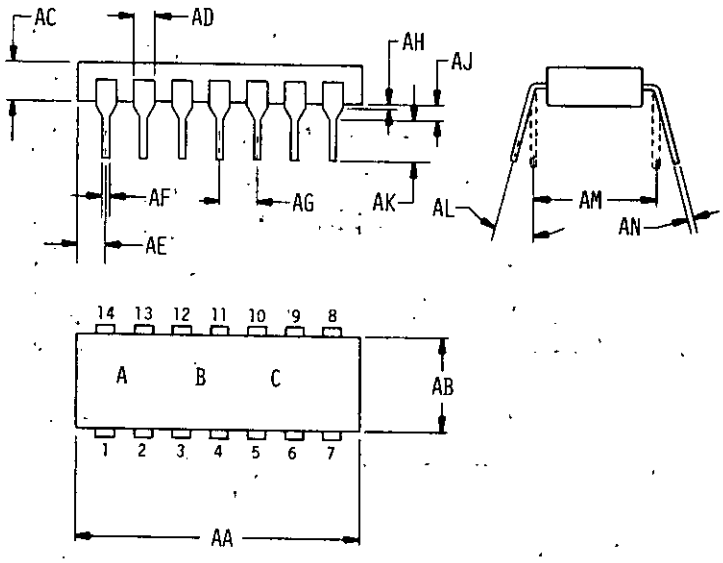


096-06-1

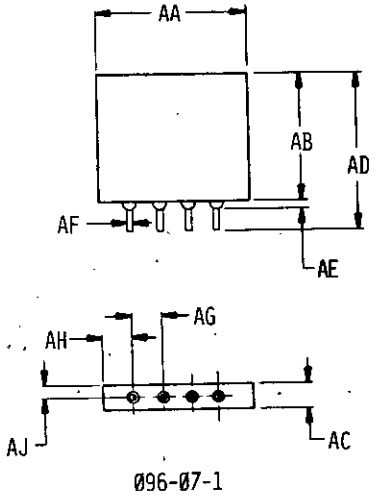

096-07-1


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

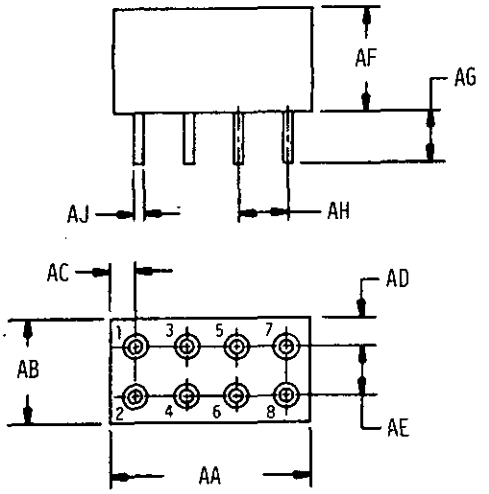


NOTES:

1) PIN NUMBERS ARE SHOWN FOR REFERENCE - NEED NOT APPEAR ON THE PART.
2) INSULATOR AROUND PIN 1 SHALL BE A CONTRASTING COLOR.
3) EDGES AND CORNERS MAY BE ROUNDED.

096-07-2




096-08-1

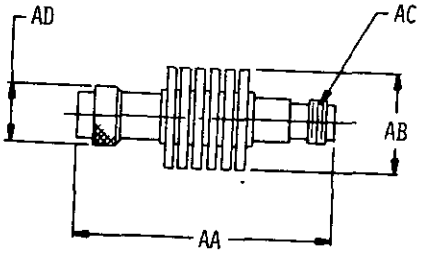


096-08-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

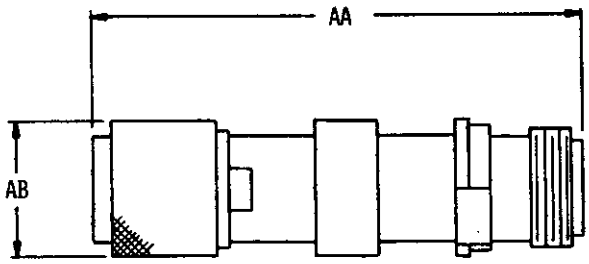


096-08-3

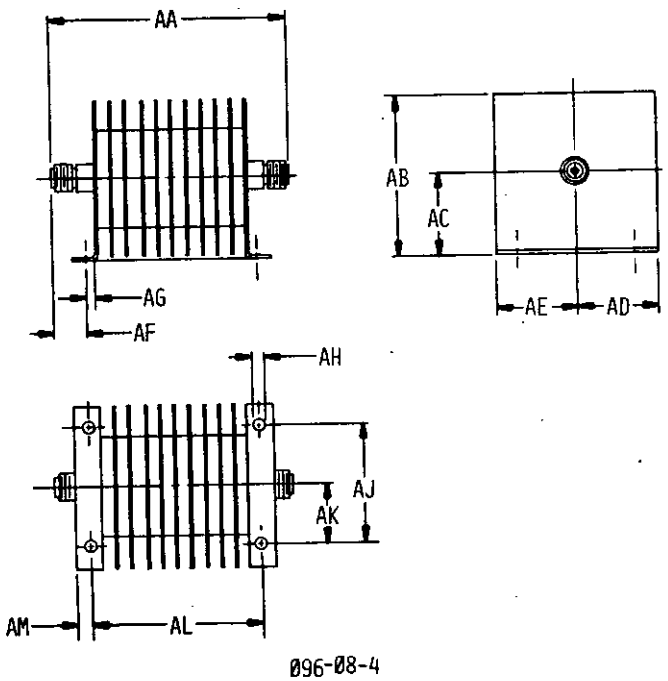


096-08-4


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

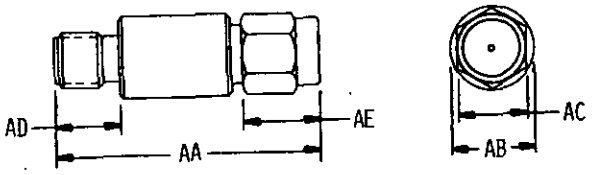


Ø96-Ø8-5




Ø96-Ø8-6

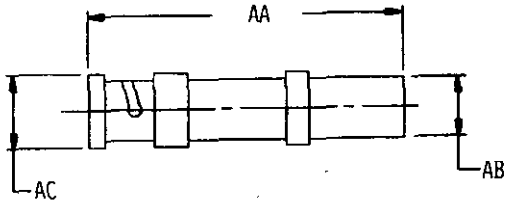

Ø96-Ø8-7

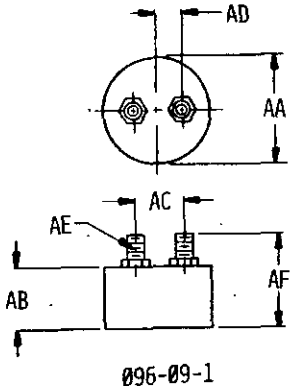


Ø96-Ø9-1

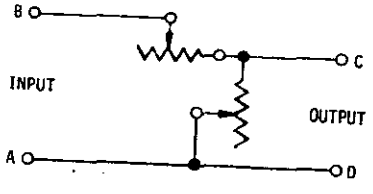


Ø96-1Ø-1


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

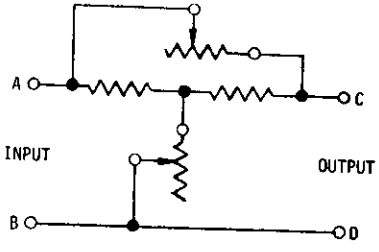


096-10-2




096-10-5




096-10-6

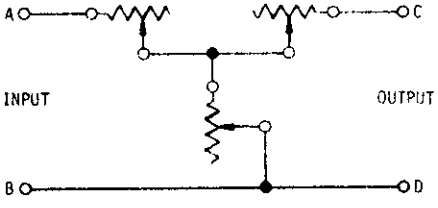


096-10-3



096-10-7

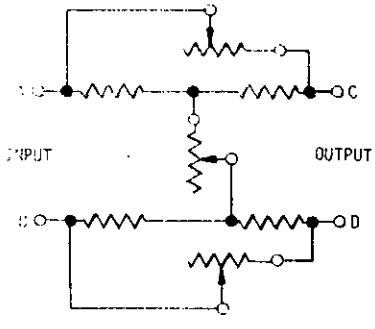


096-10-4




096-10-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.




096-10-9




096-10-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

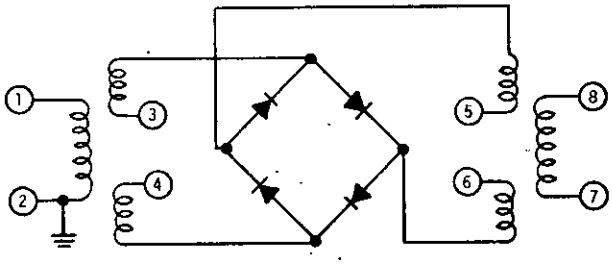


PIN NO.	FUNCTION
1	RF INPUT
8	RF OUTPUT
3,4	CONNECT TOGETHER TO FORM CONTROL INPUT
2,5,6,7	CONNECT TOGETHER TO FORM COMMON GROUND

096-10-11

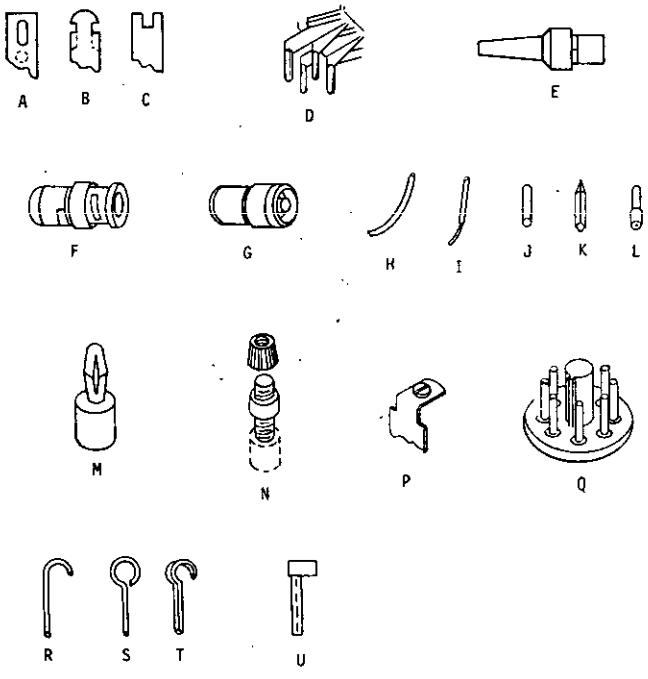


096-11-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

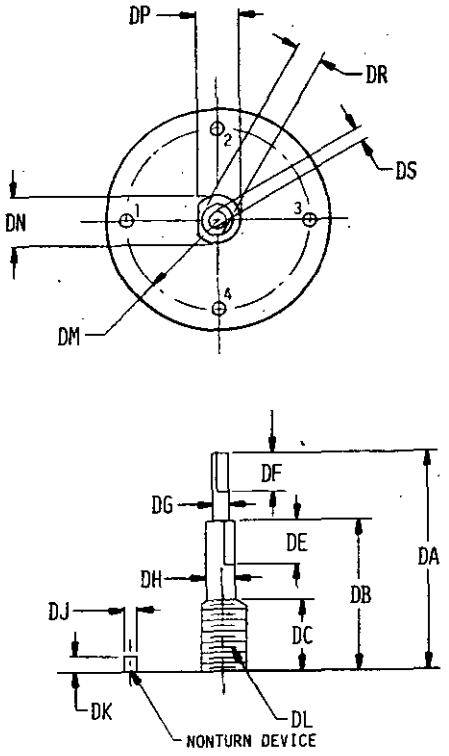

Ø96-12-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

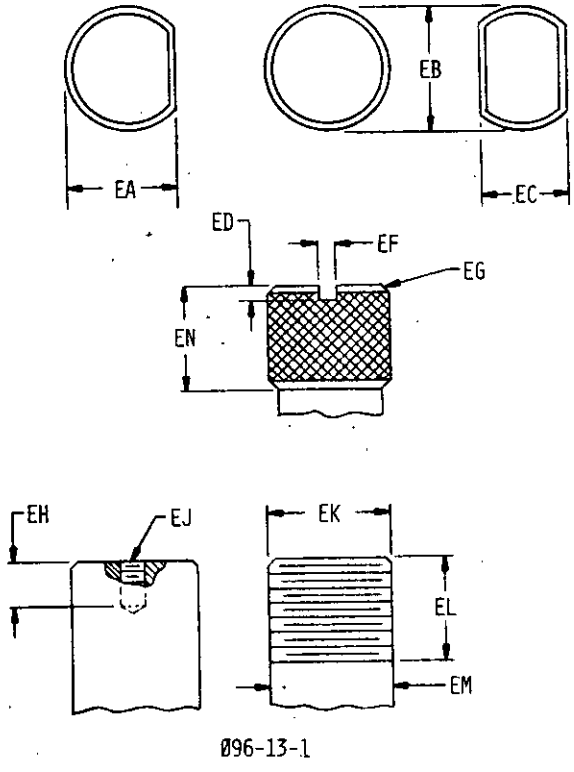

Ø96-13-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	10	1412	122	1497	72	1610	16
0102	10	1413	122	1498	72	1612	16
0103	10	1414	124	1500	112	1613	16
0104	10	1416	124	1502	112	1614	16
0105	10	1418	120	1504	112	1616	16
0107	12	1419	122	1508	112	1618	16
0108	12	1420	122	1509	112	1619	16
0700	10	1421	124	1511	72	1620	20
0800	10	1426	134	1520	72	1634	24
1003	10	1427	134	1529	138	1636	34
1004	10	1428	134	1533	128	1638	34
1005	10	1429	76	1534	128	1640	34
1006	10	1430	134	1535	130	1642	34
1008	10	1431	134	1536	132	1644	34
1009	26	1432	76	1537	132	1646	34
1371	72	1433	120	1538	132	1648	30
1372	72	1435	132	1539	100	1650	30
1373	72	1436	132	1562	14	1652	30
1375	122	1438	134	1563	14	1654	32
1376	72	1439	136	1564	14	1656	32
1377	72	1446	128	1565	14	1657	32
1378	72	1447	128	1566	14	1658	32
1380	70	1448	128	1567	14	1659	32
1381	72	1452	134	1568	14	1676	30
1383	72	1453	134	1569	14	1678	30
1384	70	1455	126	1570	14	1681	30
1386	70	1456	126	1572	14	1682	30
1387	70	1459	134	1573	16	1683	30
1391	78	1462	136	1575	16	1684	30
1394	76	1466	130	1578	16	1686	30
1395	78	1467	130	1584	18	1705	32
1396	76	1470	130	1590	16	1706	32
1397	78	1475	128	1592	16	1707	32
1398	76	1476	130	1594	16	1708	32
1400	74	1478	110	1596	18	1714	20
1404	76	1482	110	1598	18	1715	20
1406	76	1486	110	1601	18	1716	20
1407	78	1488	110	1602	18	1717	20
1410	122	1494	110	1604	18	1719	20
1411	122	1495	110	1608	16	1728	30

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1730	38	1960	88	2027	43	2067	43
1732	38	1961	88	2028	43	2068	43
1734	38	1978	96	2029	43	2069	43
1751	40	1980	96	2030	43	2070	100
1752	40	1982	96	2031	43	2072	100
1757	38	1983	96	2032	43	2100	14
1760	36	1984	96	2033	43	2102	16
1761	36	1985	96	2034	43	2104	16
1770	38	1986	96	2035	43	2106	16
1772	38	1988	96	2036	43	2108	16
1774	38	1994	94	2037	43	2110	32
1776	38	1996	94	2038	43	2120	30
1802	46	1998	94	2039	43	2122	30
1804	46	2000	43	2040	43	2124	30
1806	46	2001	43	2041	43	2126	30
1808	46	2002	43	2042	43	2128	32
1810	46	2003	43	2043	43	2130	32
1814	44	2004	43	2044	43	2132	34
1818	48	2005	43	2045	43	2134	34
1819	48	2006	43	2046	43	2136	34
1820	48	2007	43	2047	43	2138	34
1824	48	2008	43	2048	43	2142	36
1826	48	2009	43	2049	43	2160	42
1864	68	2010	43	2050	43	2162	42
1866	68	2011	43	2051	43	2166	42
1870	68	2012	43	2052	43	2168	52
1872	68	2013	43	2053	43	2170	52
1874	66	2014	43	2054	43	2172	56
1878	66	2015	43	2055	43	2174	56
1884	74	2016	43	2056	43	2176	58
1886	74	2017	43	2057	43	2177	58
1890	74	2018	43	2058	43	2178	58
1930	80	2019	43	2059	43	2180	58
1932	80	2020	43	2060	43	2182	58
1934	80	2021	43	2061	43	2184	58
1936	80	2022	43	2062	43	2186	58
1940	80	2023	43	2063	43	2187	58
1941	80	2024	43	2064	43	2188	58
1942	80	2025	43	2065	43	2189	58
1959	88	2026	43	2066	43	2190	58

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2192	58	2276	22	3052	106	4136	120
2193	58	2278	22	3054	108	4138	122
2195	60	2280	22	3057	108	4140	122
2196	66	2290	22	3058	108	4142	124
2198	68	2292	22	3060	108	4143	126
2200	68	2294	24	3062	108	4144	124
2202	68	2296	24	3063	108	4146	124
2204	68	2298	24	3064	106	4147	124
2206	68	2300	24	3065	108	4150	126
2208	68	2302	24	3068	108	4152	126
2210	96	2304	24	3070	108	4154	126
2212	98	2306	24	3072	106	4158	130
2214	106	2310	14	3073	106	4160	130
2220	110	2311	14	3075	106	4162	130
2222	112	2316	78	3674	106	4166	132
2224	126	3025	75	4009	50	4168	132
2226	128	3026	75	4010	50	4170	132
2228	130	3027	75	4012	50	4174	86
2230	136	3028	75	4014	54	4176	86
2234	136	3029	75	4016	54	4178	86
2236	136	3030	75	4018	54	4222	62
2240	136	3031	75	4040	64	4226	62
2242	136	3032	75	4042	64	4230	62
2244	138	3033	75	4044	64	4271	42
2246	138	3034	75	4050	70	4272	64
2247	138	3035	75	4052	70	4276	44
2248	138	3036	75	4054	70	4278	44
2250	20	3037	75	4100	90	4279	44
2252	20	3038	75	4102	90	4280	44
2254	20	3039	75	4104	90	4284	44
2256	20	3040	75	4106	90	4286	44
2258	22	3041	75	4108	110	4288	44
2260	22	3042	75	4110	110	4292	40
2262	22	3043	75	4112	110	4300	37
2264	22	3044	75	4114	112	4301	37
2266	22	3045	75	4116	112	4302	37
2268	22	3046	75	4118	112	4303	37
2270	22	3047	75	4130	114	4304	37
2272	22	3048	75	4132	114	4305	37
2274	22	3049	75	4134	114	4306	37

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4307	37	4420	47	4460	47	4738	102
4308	37	4421	47	4461	47	4739	102
4309	37	4422	47	4462	47	4740	102
4310	37	4423	47	4463	47	4741	102
4311	37	4424	47	4662	114	4742	102
4312	37	4425	47	4663	116	4743	104
4313	37	4426	47	4664	116	4745	100
4314	37	4427	47	4665	116	4746	100
4315	37	4428	47	4666	114	4748	100
4316	37	4429	47	4667	116	4749	104
4317	37	4430	47	4669	92	4750	104
4318	37	4431	47	4671	92	4751	104
4319	37	4432	47	4672	114	4752	104
4320	37	4433	47	4674	114	4754	60
4321	37	4434	47	4675	114	4755	60
4322	37	4435	47	4683	114	4756	60
4323	37	4436	47	4685	112	4760	60
4360	76	4437	47	4686	112	4761	60
4362	76	4438	47	4689	92	4762	60
4364	76	4439	47	4691	92	4765	98
4400	47	4440	47	4692	92	4766	98
4401	47	4441	47	4694	92	4770	98
4402	47	4442	47	4695	92	4771	98
4403	47	4443	47	4698	92	4772	98
4404	47	4444	47	4700	90	4782	96
4405	47	4445	47	4701	90	4788	64
4406	47	4446	47	4708	128	4790	64
4407	47	4447	47	4709	128	4791	62
4408	47	4448	47	4713	126	4793	64
4409	47	4449	47	4714	126	4795	62
4410	47	4450	47	4715	126	4798	62
4411	47	4451	47	4722	124	4799	62
4412	47	4452	47	4723	124	4803	62
4413	47	4453	47	4730	130	4805	62
4414	47	4454	47	4731	130	4809	66
4415	47	4455	47	4732	102	4810	66
4416	47	4456	47	4734	100	4811	66
4417	47	4457	47	4735	104	4812	66
4418	47	4458	47	4736	102	4813	62
4419	47	4459	47	4737	102	4814	66

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4819	64	4943	138	6222	118	6328	104
4820	64	4944	138	6224	118	6329	104
4825	66	4950	28	6225	118	6330	104
4829	94	4952	100	6228	116	6331	104
4830	92	4956	100	6229	116	6332	106
4831	94	4958	98	6231	118	6333	106
4834	92	4959	98	6232	118	6359	70
4835	94	4960	100	6234	120	6369	10
4836	92	4963	86	6235	120	6370	100
4838	94	4967	84	6236	120	6371	82
4839	94	4968	86	6237	120	6372	140
4842	56	4972	86	6238	120	6696	88
4843	82	4976	136	6279	94	6697	88
4844	56	4977	136	6282	82	6698	88
4845	56	4978	132	6283	84	6699	88
4846	56	4979	132	6284	84	6700	90
4848	56	4980	78	6285	82	6701	90
4849	50	4981	78	6286	82	6706	90
4853	64	4983	78	6287	84	6707	90
4856	54	4984	78	6288	84	6710	88
4857	82	4985	78	6289	84	6713	88
4858	82	4986	78	6291	88	6870	140
4861	54	4989	92	6292	52	6873	10
4862	54	4991	78	6293	52	6874	12
4867	56	5060	24	6294	52	6921	90
4869	56	5061	24	6300	50	6923	90
4870	56	5062	26	6308	52	6929	86
4874	54	5063	26	6311	52	6930	86
4875	54	5068	26	6312	52	6939	90
4878	96	5069	26	6315	120	6941	12
4884	50	5070	26	6316	120	6942	12
4885	50	5071	26	6318	118	6991	142
4886	50	5209	138	6319	118	6992	142
4890	64	5297	84	6320	102	6993	142
4891	52	6205	116	6321	102	6994	142
4894	50	6217	116	6322	102	6995	142
4900	52	6218	116	6323	102	7001	140
4906	48	6219	118	6324	104	7002	140
4908	48	6220	118	6325	104	7003	140
4942	138	6221	118	6326	104	7004	140

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
7005	140						
7021	40						
7022	40						
7023	40						
7024	40						
7572	26						
7577	26						
7580	26						
7629	140						
7630	140						

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Additional Part Marking	142
Additional Requirements	140
Altitude Rating	24
Aperture Cards Required	12
Applicable Documents	142
Attenuation	14, 40
Attenuation Accuracy	44
Average Power Rating	16
Base Document	10
Characteristic/Input Impedance	16
City, State, Zip	10
Class	14
Classification	14
Company Name/Command	10
Configuration	26
Connector	30
Connector Wear Resistance	48
Contract Number/Office Symbol	10
Control, Source	10
Control, Specification	12
Date	10
Definition of Hermetic Sealing	142
Design and Construction	30
Dielectric Withstanding Voltage at Reduced Barometric Pressure	48
Dielectric Withstanding Voltage at Sea Level	54
Electrical Ratings	14
Electrical Travel	36
Electromagnetic Interference (EMI)	58
Enclosure Construction	30
Finishes	28
Flange	36
Format	10
Fungus	60
Government Design Activity FSCM	10
Humidity	62
Illustrations	28
Immersion	64

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Impedance	66
Incremental Attenuation Range	20
Insertion Loss	20
Insulation Resistance	70
Longitudinal Balance to Ground	74
Materials	28
Mechanical Backlash	38
Mechanical Travel	38
Metals	28
Moisture Resistance	74
Mounting Hardware	140
Nomenclature	142
Nonturn Device	30
Notes	142
Operating Frequency	18
Operating Frequency Range	16
Output Impedance	18
Packaging	142
Part Marking	140
Part Number	12
Part Number Cross-Reference	142
Peak Power	80
Peak Power Rating	18
Performance Characteristics	138
Phone Number	10
Power Coefficient	20
Quality Assurance Provisions	142
Radiographic	80
Random Drop	84
Reliability Screening	86
Repeatability	22
Requester FSCM	10
Requester's Name	10
Resistance to Soldering Heat	90
Resistance to Solvents	92
Revision of AEDPS Document (Number)	12
Rotational Life	94

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Salt Spray	96
Sand and Dust	98
Scope	12
Seal	100
Sensitivity of Attenuation	106
Shaft	30
Shock, High Impact	110
Shock, Specified Pulse	112
Solderability	114
Source Table	12
Stop Torque	40
Storage Conditions	138
Street/Building	10
Superseded Document	142
Switch	32
Switch Current Rating	20
Switching Ratings	22
Switch Life Rating	24
Switch Voltage Rating	20
System Application	10
Tabulated Characteristics	28
Temperature Coefficient	24
Temperature, High	116
Temperature, Low	118
Temperature Ratings	26
Terminal Designations	36
Terminals	34
Terminal Strength	120
Thermal Shock (Temperature Cycling)	124
Turning Torque	38
Type	14
Units of Measure	12, 26
Vibration, High Frequency	126
Vibration, Low Frequency	128
Vibration, Random	132
Voltage Rating	18
Voltage Standing Wave Ratio (VSWR)	24, 136
Weight	40
Workmanship	140

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

The digital copy of DOD-STD-35-79A(MI), dated 2 Feb 1979 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-79A(MI), dated 2 Feb 1979 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
DOD-STD-35-79A	

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.