MILITARY STANDARD

AUTOMATED ENGINEERING

DOCUMENT PREPARATION SYSTEM

ATTENUATORS, FIXED AND VARIABLE

TO ALL HOLDERS OF DOD-STD-35-79A(MI):

1. THE FOLLOWING PAGES OF DOD-STD-35-79A(MI) HAVE BEEN REVISED AND SUPERSEDE THE PAGES LISTED.

NEW PAGE	DATE	SUPERSEDED PAGE	DATE
COVER	31 AUGUST 1987	COVER	2 FEBRUARY 1979
ii	31 AUGUST 1987	ii	2 FEBRUARY 1979
v	31 AUGUST 1987	v	2 FEBRUARY 1979
1	31 AUGUST 1987	1	2 FEBRUARY 1979
2	31 AUGUST 1987	2	2 FEBRUARY 1979
3	31 AUGUST 1987	3	2 FEBRUARY 1979
4	31 AUGUST 1987	4	2 FEBRUARY 1979
7	31 AUGUST 1987	7	2 FEBRUARY 1979
8	31 AUGUST 1987	8	2 FEBRUARY 1979
9	31 AUGUST 1987	9	2 FEBRUARY 1979
10	31 AUGUST 1987	10	2 FEBRUARY 1979
11	31 AUGUST 1987	11	2 FEBRUARY 1979
12	2 FEBRUARY 1979	(REPRINTED WITHOUT CHANGE)	
13	31 AUGUST 1987	13	2 FEBRUARY 1979
14	2 FEBRUARY 1979	(REPRINTED WITHOUT CHANGE)	
21	2 FEBRUARY 1979	(REPRINTED WITHOUT CHANGE)	
22	31 AUGUST 1987	22	2 FEBRUARY 1979
23	31 AUGUST 1987	23	2 FEBRUARY 1979
24	2 FEBRUARY 1979	(REPRINTED WITHOUT CHANGE)	
45	2 FEBRUARY 1979	(REPRINTED WITHOUT CHANGE)	
46	31 AUGUST 1987	46	2 FEBRUARY 1979
47	31 AUGUST 1987	47	2 FEBRUARY 1979
48	2 FEBRUARY 1979	(REPRINTED WITHOUT CHANGE)	
65	2 FEBRUARY 1979	(REPRINTED WITHOUT CHANGE)	
66	31 AUGUST 1987	66	2 FEBRUARY 1979
67	31 AUGUST 1987	67	2 FEBRUARY 1979
68	31 AUGUST 1987	68	2 FEBRUARY 1979
69	31 AUGUST 1987	69	2 FEBRUARY 1979
70	2 FEBRUARY 1979	(REPRINTED WITHOUT CHANGE)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

NEW PAGE	DATE	SUPERSEDED PAGE	DATE
73	2 FEBRUARY 1979	(REPRINTED WITHOUT CHANGE)	
74	31 AUGUST 1987	74	2 FEBRUARY 1979
75	31 AUGUST 1987	75	2 FEBRUARY 1979
76	31 AUGUST 1987	76	2 FEBRUARY 1979
77	31 AUGUST 1987	77	2 FEBRUARY 1979
78	2 FEBRUARY 1979	(REPRINTED WITHOUT CHANGE)	
159	31 AUGUST 1987	159	2 FEBRUARY 1979
159a	31 AUGUST 1987		
159b	31 AUGUST 1987		
160	31 AUGUST 1987	160	2 FEBRUARY 1979
165	2 FEBRUARY 1979	(REPRINTED WITHOUT CHANGE)	
166	31 AUGUST 1987	166	2 FEBRUARY 1979
167	31 AUGUST 1987	167	2 FEBRUARY 1979
168	31 AUGUST 1987	168	2 FEBRUARY 1979
169	31 AUGUST 1987	169	2 FEBRUARY 1979
170	31 AUGUST 1987	170	2 FEBRUARY 1979
171	31 AUGUST 1987	171	2 FEBRUARY 1979
172	31 AUGUST 1987	172	2 FEBRUARY 1979
173	31 AUGUST 1987	173	2 FEBRUARY 1979
174	31 AUGUST 1987	174	2 FEBRUARY 1979
174a	31 AUGUST 1987		
174b	31 AUGUST 1987		

2. RETAIN THIS NOTICE PAGE AND INSERT BEFORE THE TABLE OF CONTENTS.

3. Holders of DOD-STD-35-79A(MI) will verify the page changes indicated above have been entered. The notice page will be retained as a check sheet. This issuance, together with append pages is a separate publication. Each notice is to be retained by stocking points until the Military Standard is completely revised or cancelled.

Custodian:
Army-MI

Review activities:
Army-AT
Army-AV
Army-ER
Army-ME
Army-MR
Army-SG
Army-CR

User activity:
Army-AR

Preparing activity:
Army-MI

(Project EDS-A374)

AREA EDS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DOD-STD-35-79A(MI)

2 FEBRUARY 1979

SUPERSEDING
MIL-STD-35-79(MI)
15 APRIL 1975

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

ATTENUATORS, FIXED AND VARIABLE

AREA EDS

NO DELIVERABLE DATA
REQUIRED BY THIS DOCUMENT

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

SUPERSEDES COVER OF 2 FEBRUARY 1979

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL COMMAND
ALEXANDRIA, VA 22333

Attenuators, Fixed and Variable
Automated Engineering
Document Preparation System

DOD-STD-35-79A(MI)

1. This Military Standard is approved for use by AMC, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data, which may be of use in improving this document, should be addressed to Commander, U.S. Army Missile Command, ATTN: AMSMI-RD-SE-TD-ST, Redstone Arsenal, Alabama 35898-5270, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

SUPERSEDES PAGE ii OF 2 FEBRUARY 1979

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	3
	2.1	Government Documents	3
	2.1.1	Specifications and Standards	3
	2.2	Other Publications	4
	2.3	Order of Precedence	4
	3.	DEFINITIONS	5
	4.	GENERAL REQUIREMENTS	6
	4.1	Introduction	6
	4.2	Specification Requirement Sheet (SRS)	6
	4.3	Configuration	6
	4.3.1	Dimensions	6
	4.3.2	Illustrations	6
	4.4	Units of Measure	6
	5.	DETAILED REQUIREMENTS	7
	5.1	Introduction	7
	5.2	MSE Formats	7
	5.3	Referenced Documents	7
	5.4	Tabulation	7
	5.5	Keyword Code Index (KCI) and Standard Paragraphs	9
	5.5.1	Interrelationship of Codes	9
	5.5.2	Automatic MSE Data	9
	5.5.3	DOD-STD-35 Tables	9

TABLES

Table	I.	Title Index	2
	II.	Tabulation Candidates	8

APPENDICES

APPENDIX	A.	Illustrations	144
	B.	Characteristic Code Index	165
		Index	172

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for Attenuators, Fixed and Variable.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate a MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts, have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specification (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for a MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSEs for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index and entered on a SRS, specifies that the title of the MSE will be the title shown in the Title Index.

Each MSE title, listed in the Title Index, is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference. When more than one document is listed for a MSE title, this information will be useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX

MSE TITLE	TITLE CODE	BASE DOCUMENT	
		NUMBER	COVERAGE
ATTENUATOR, FIXED	096001	MIL-A-3933	GENERAL SPEC
ATTENUATOR, VARIABLE	096002	MIL-A-24215	GENERAL SPEC

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Government Documents.

2.1.1 Specifications and Standards. Unless otherwise specified, the following specifications and standards, of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-F-3922	Flanges, Waveguide, General Purpose, General Specification For
MIL-A-3933	Attenuators, Fixed, General Specification For
MIL-A-24215	Attenuators, Variable, (Coaxial and Waveguide), General Specification For

STANDARDS

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-130	Identification Marking of US Military Property
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-810	Environmental Test Methods and Engineering Guidelines
MIL-STD-1276	Leads, Weldable, for Electronic Component Parts
MIL-STD-1285	Marking of Electrical and Electronic Parts

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

MIL-STD-1352 Selection of Fixed Attenuators

(Copies of specifications, standards, drawings, and publications required by contractors, in connection with specific procurement functions, should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other Publications. The following documents form a part of this standard to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the issue of the DoDISS specified in the solicitation. The issues of documents which have not been adopted shall be those in effect on the date of the cited DoDISS.

ASTME380 Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, PA 19103.)

(Nongovernment standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of Precedence. In the event of conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE Formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced Documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table II provides codes for column headings which may be used for Attenuators, Fixed and Variable characteristics. When different units of measure are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE II. TABULATION CANDIDATES

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1572	MINIMUM ATTEN (DECIBELS)	1573	MAXIMUM ATTEN (DECIBELS)	1575	NOMINAL ATTEN (DECIBELS)
1578	CHRST/ INPUT IMPEDANCE (OHMS)	1584	OUTPUT IMPEDANCE (OHMS)	1590	AVERAGE POWER RATING (WATTS)
1596	PEAK POWER RATING KILOWATTS	1601	MAX VOLT RATING DC OR RMS	1602	MAX VOLT RATING (VOLTS DC)
1604	MAX VOLT RATING (VOLTS AC)	1620	MAXIMUM INSERTION LOSS (DB)	1634	MAXIMUM TEMP COEF (DB/DEG C)
1636	TERM TYPE FROM ILL. 096-11-1	2100	CLASS	2102	MAX OPER FREQ HERTZ
2104	MAX OPER FREQUENCY KILOHERTZ	2106	MAX OPER FREQUENCY MEGAHERTZ	2108	MAX OPER FREQUENCY GIGAHERTZ
2120	CONNECTOR TYPE	2142	FLANGE TYPE	2256	MAX POWER COEF (DB/WATT)
2306	MAX VSWR	2311	TYPE		

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

5.5 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on a SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part's unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.5.1 Interrelationship of Codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The standard paragraph, of which the code is a part, is shown adjacent to the code on the right-hand page. When a characteristic value, entered with a code, becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact characteristic value entry, as supplied with the code, except for "X" entries.

5.5.2 Automatic MSE Data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without making additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.5.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in DOD-STD-35. Refer to DOD-STD-35 for general explanation in the generation of tables.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*REQUESTER'S FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT.	0700
ONE SECTION DOCUMENT.	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil - Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

REPRINTED WITHOUT CHANGE

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6874	THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).
0107	
0108	0108. SCOPE. SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.
	PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER. PART NUMBER. THE PART NUMBER FOR THE ITEMS IS (THE SAME AS THE NUMBER OF THIS DOCUMENT) PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.
6941	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.
6942	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION	
TYPE (SELECT ONE)	
L PAD.	1562
BRIDGED-T PAD.	1563
STRAIGHT-T PAD.	1564
BRIDGED-H PAD.	1565
O PAD.	1566
UNBALANCED PI PAD.	1567
BALANCED H PAD.	1568
BALANCED LADDER.	1569
UNBALANCED LADDER.	1570
OPTIONAL.	2310
(TYPE)	2311
CLASS	
PER BASE DOCUMENT (DESIGNATION)	2100
ELECTRICAL RATINGS	
ATTENUATION	
MINIMUM (DECIBELS)	1572

REPRINTED WITHOUT CHANGE

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1714	SWITCH CURRENT RATING. THE MAXIMUM CURRENT SHALL BE 1714 AMPERE(S).
1715	THE LOAD TYPE SHALL BE 1715.
1719	SWITCH VOLTAGE RATING. THE MAXIMUM WORKING VOLTAGE SHALL BE 1719 VOLT(S) DC OR RMS.
1717	SWITCH VOLTAGE RATING. THE MAXIMUM WORKING VOLTAGE SHALL BE 1717 VOLT(S) DC.
1716	SWITCH VOLTAGE RATING. THE MAXIMUM WORKING VOLTAGE SHALL BE 1716 VOLT(S) AC.
2250 2252 2254	INCREMENTAL ATTENUATION RANGE. INCREMENTAL ATTENUATION RANGE SHALL BE 2250 TO 2252 DECIBEL(S) IN 2254 DECIBEL STEP(S).
1620	INSERTION LOSS. THE MAXIMUM INSERTION LOSS SHALL BE 1620 DECIBEL(S).
2256	POWER COEFFICIENT. THE POWER COEFFICIENT SHALL BE NOT GREATER THAN 2256 DECIBEL(S) PER WATT.

REPRINTED WITHOUT CHANGE
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELECTRICAL RATINGS (CONT)	
REPEATABILITY	
MAXIMUM VARIATION (DECIBELS)	2258
FREQUENCY RANGE (SELECT ONE)	
MINIMUM (HERTZ)	2260
*MAXIMUM (HERTZ)	2262
MINIMUM (MEGAHERTZ)	2264
*MAXIMUM (MEGAHERTZ)	2266
MINIMUM (GIGAHERTZ)	2268
*MAXIMUM (GIGAHERTZ)	2270
SWITCH RATINGS	
METHOD (SELECT ONE)	
MANUAL.	2272
MOTORIZED.	2274
RELAYS.	2276
ELECTRONIC.	2278
PROGRAMMABLE.	2280
SPEED (MILLISECONDS)	2290
VOLTAGE (VOLTS DC)	2292

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2258	REPEATABILITY. REPEATABILITY VARIATION SHALL BE NOT GREATER THAN 2258 DECIBEL(S).
2260 2262	THE REPEATABILITY FREQUENCY RANGE SHALL BE 2260 TO 2262 HERTZ.
2264 2266	THE REPEATABILITY FREQUENCY RANGE SHALL BE 2264 TO 2266 MEGAHERTZ.
2268 2270	THE REPEATABILITY FREQUENCY RANGE SHALL BE 2268 TO 2270 GIGAHERTZ.
	SWITCHING RATINGS.
2272	THE SWITCHING METHOD SHALL BE MANUAL.
2274	THE SWITCHING METHOD SHALL BE MOTORIZED.
2276	THE SWITCHING METHOD SHALL BE RELAYS.
2278	THE SWITCHING METHOD SHALL BE ELECTRONIC.
2280	SWITCHING SHALL BE PROGRAMMABLE.
2290	SWITCHING SPEED SHALL BE 2290 MILLISECOND(S).
2292	VOLTAGE SHALL BE 2292 VOLT(S) DC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SWITCHING RATINGS (CONT)	
POWER (SELECT ONE)	
(WATTS)	2294
(MILLIWATTS)	2296
DURATION OF POWER APPLICATION (MILLISECONDS)	2298
BITS (NUMBER)	2300
SWITCH LIFE RATING (SELECT ONE)	
STEPS (NUMBER)	2302
CYCLES (NUMBER)	2304
TEMPERATURE COEFFICIENT	
MAXIMUM (DECIBELS PER DEGREE CELSIUS)	1634
VOLTAGE STANDING WAVE RATIO (VSWR)	
MAXIMUM (NUMBER)	2306
ALTITUDE RATING	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5060
SEA LEVEL TO (METERS)	5061

REPRINTED WITHOUT CHANGE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4276	INPUT VOLTAGE SHALL BE 4276 VOLT(S) DC.
4278	INPUT VOLTAGE SHALL BE 4278 VOLT(S) AC.
4279	INPUT FREQUENCY OF AC VOLTAGE SHALL BE 4279 HERTZ.
4280	THE TERMINATING RESISTANCE SHALL BE 4280 OHM(S).
4284	ATTENUATION SHALL BE MEASURED AT ZERO AND 100 PERCENT ROTATION.
4286	ATTENUATION SHALL BE MEASURED AT EACH STEP.
4288	ATTENUATION SHALL BE MEASURED AT THE ATTENUATOR SETTING SHOWN IN THE ATTENUATION TABLE.
1814	ATTENUATION ACCURACY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1814.

REPRINTED WITHOUT CHANGE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ATTENUATION ACCURACY (CONT)	
REQUIREMENTS (SELECT ONE)	
PER ATTENUATION ACCURACY TABLE.	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1802
PER MIL-A-24215.	1804
OUTPUT LEVEL, 1 MILLIWATT (DECIBELS)	1806
TEST FREQUENCIES SHALL BE IDENTIFIED IN ATTENUATION ACCURACY TABLE.	1808
TERMINATING RESISTANCE (OHMS)	1810

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currenversion before use.

CHAR
CODE STANDARD PARAGRAPH

ATTENUATION ACCURACY. THE REQUIREMENT(S) SHALL BE AS SPECIFIED IN THE ATTENUATION ACCURACY TABLE.

ATTENUATION ACCURACY TABLE

FREQUENCY (KHZ)		ATTEN ACCURACY	UP TO	OVER	UP TO (DB) +	OVER (DB) +	PAD
MIN	MAX	(+OR-DB)	(DB)	(DB)	INSR LS	INSR LS	ID
4400	4401	4402	4403	4404	4405	4406	4407
4408	4409	4410	4411	4412	4413	4414	4415
4416	4417	4418	4419	4420	4421	4422	4423
4424	4425	4426	4427	4428	4429	4430	4431
4432	4433	4434	4435	4436	4437	4438	4439
4440	4441	4442	4443	4444	4445	4446	4447
4448	4449	4450	4451	4452	4453	4454	4455
4456	4457	4458	4459	4460	4461	4462	4463

1802 ATTENUATION ACCURACY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1802.

1804 ATTENUATION ACCURACY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-A-24215.

1806 THE OUTPUT LEVEL SHALL BE 1806 DECIBEL(S) AT A REFERENCE POWER OF 1 MILLIWATT.

1808 TEST FREQUENCIES SHALL BE THOSE IDENTIFIED IN THE ATTENUATION ACCURACY TABLE.

1810 THE ATTENUATOR SHALL BE TERMINATED WITH A NONINDUCTIVE 1810 OHM RESISTANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONNECTOR WEAR RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1824
NO REMOVAL OF EXCESSIVE MATERIAL OR LUBRICANT DURING OR AFTER CYCLING.	1826
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1818
PER MIL-A-3933.	1819
CONNECTION AND DISCONNECTION CYCLES (NUMBER)	1820
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4908
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4906

REPRINTED WITHOUT CHANGE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4788	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.
4853	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 103 OF MIL-STD-202.
4890	TEST CONDITION LETTER 4890 SHALL APPLY.
4793	MAGNITUDE OF THE POLARIZING VOLTAGE SHALL BE 4793 VOLTS, DC.
4790	DURATION OF APPLICATION OF VOLTAGE SHALL BE 4790 HOUR(S).
4272	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE TERMINALS 4272.
4819	IMMERSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4819.
4820	IMMERSION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4040	CHANGE IN CHARACTERISTIC IMPEDANCE SHALL BE NOT GREATER THAN 4040 PERCENT.
4042	CHANGE IN ATTENUATION SHALL BE NOT GREATER THAN 4042 DECIBEL(S).
4044	ITEM SHALL MEET ATTENUATION ACCURACY REQUIREMENTS SPECIFIED.

REPRINTED WITHOUT CHANGE
Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMMERSION (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
MINIMUM INSULATION RESISTANCE (MEGOHMS)	4825
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4809
PER MIL-STD-202, METHOD 104.	4810
*TEST CONDITION (LETTER)	4811
MEASUREMENTS AFTER FINAL CYCLE (HOURS)	4812
TIME BEFORE MEASUREMENTS AFTER FINAL CYCLE (HOURS)	4814
INSERTION LOSS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2110
MAXIMUM LOSS AT MINIMUM POSITION (DECIBELS)	2112
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2114
PER MIL-A-24215.	2116

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
4825	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 4825 MEGOHM(S).
4809	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4809.
4810	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 104 OF MIL-STD-202.
4811	TEST CONDITION LETTER 4811 SHALL APPLY.
4812	FINAL MEASUREMENT(S) SHALL BE MADE WITHIN 4812 HOUR(S) AFTER FINAL CYCLE.
4814	MEASUREMENTS SHALL BE NOT MADE UNTIL 4814 HOUR(S) AFTER THE FINAL CYCLE.
2110	INSERTION LOSS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2110.
2112	INSERTION LOSS. THE VALUE OF ATTENUATION AT THE MINIMUM ATTENUATION POSITION, ACROSS THE OPERATING FREQUENCY RANGE, SHALL BE NOT GREATER THAN 2112 DECIBEL(S).
2114	INSERTION LOSS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2114.
2116	INSERTION LOSS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-A-24215.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE

THIS PAGE DELETED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

THIS PAGE DELETED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1380
AS FOLLOWS:	6359
*MINIMUM INSULATION RESISTANCE (SELECT ONE)	
SINGLE TEST	
(MEGOHMS)	1386
MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	1384
*SECOND TEST (MEGOHMS)	1387
MAXIMUM CHANGE IN CHARACTERISTIC IMPEDANCE (PERCENT)	4050
MAXIMUM CHANGE IN ATTENUATION (DECIBELS)	4052
ATTENUATION ACCURACY AS SPECIFIED.	4054
NO EVIDENCE OF PHYSICAL DAMAGE.	1407

REPRINTED WITHOUT CHANGE

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1371	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.
1511	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 302 OF MIL-STD-202.
1378	TEST CONDITION LETTER 1378 SHALL APPLY.
1373	TEST POTENTIAL SHALL BE 1373 VOLTS, DC.
1376	ELECTRIFICATION DURATION SHALL BE 1376 SECOND(S).
1377	THE MEASUREMENT ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1377 PERCENT.
	POINTS OF INSULATION RESISTANCE MEASUREMENT SHALL BE AS FOLLOWS:
1497	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
1498	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
1520	SPECIAL PREPARATIONS OR CONDITIONS SHALL BE IN ACCORDANCE WITH 1520.
1372	FIRST TEST TEMPERATURE SHALL BE 1372 DEGREES CELSIUS.
1381	SECOND TEST TEMPERATURE SHALL BE 1381 DEGREES CELSIUS.
1383	TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1383 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

REPRINTED WITHOUT CHANGE

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1400
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	1396
REMAIN WITHIN SPECIFIED TOLERANCE.	1398
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1394
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	1429
MAXIMUM LEAKAGE AFTER DRYING (MILIAMPERES)	1404
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	1432
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	1406
MAXIMUM CHANGE IN CHARACTERISTIC IMPEDANCE (PERCENT)	4360
MAXIMUM CHANGE IN ATTENUATION (DECIBELS)	4362
ATTENUATION ACCURACY AS SPECIFIED.	4364

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1400	MOISTURE RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1400.
1396	MOISTURE RESISTANCE. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
1398	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1394	THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING OR INSULATION BREAKDOWN, WHEN DIELECTRIC WITHSTANDING VOLTAGE IS APPLIED.
1429	CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1429 MILLIAMPERE(S) AT HIGH HUMIDITY.
1404	CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1404 MILLIAMPERE(S) AFTER DRYING.
1432	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1432 MEGOHM(S) AT HIGH HUMIDITY.
1406	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1406 MEGOHM(S) AFTER DRYING.
4360	CHANGE IN CHARACTERISTIC IMPEDANCE SHALL BE NOT GREATER THAN 4360 PERCENT.
4362	CHANGE IN ATTENUATION SHALL BE NOT GREATER THAN 4362 DECIBEL(S).
4364	ITEM SHALL MEET ATTENUATION ACCURACY REQUIREMENTS SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE

THIS PAGE DELETED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

THIS PAGE DELETED


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)


CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1391
PER MIL-STD-202, METHOD 106.	1397
POLARIZING VOLTAGE (VOLTS, DC)	1395
LOADING VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4981
(VOLTS, AC)	4980
PERCENT OF SAMPLE SUBJECTED TO POLARIZING VOLTAGE (PERCENT)	4991
STEP 7A NOT APPLICABLE.	4985
STEP 7B NOT APPLICABLE.	4986
MOUNTING ____	2316
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	4983
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	4984

REPRINTED WITHOUT CHANGE


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

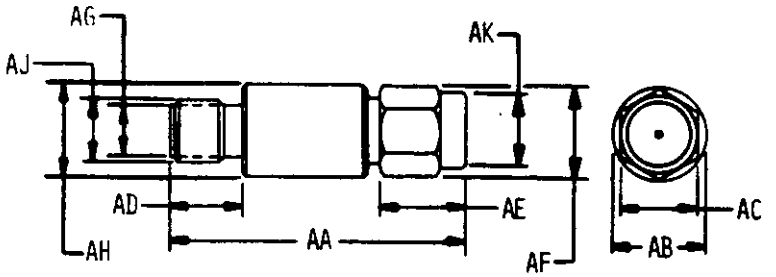


096-08-5

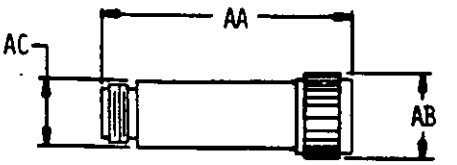

096-08-6

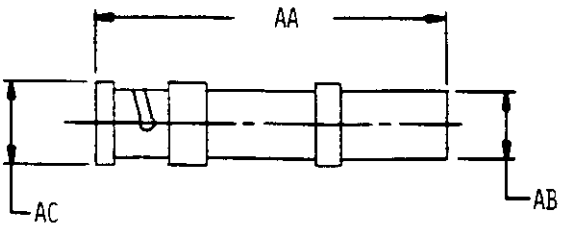


096-08-7

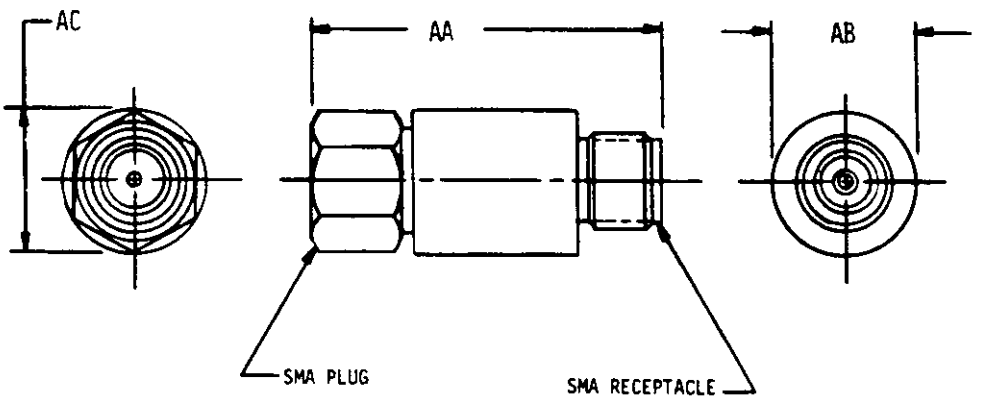


096-08-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

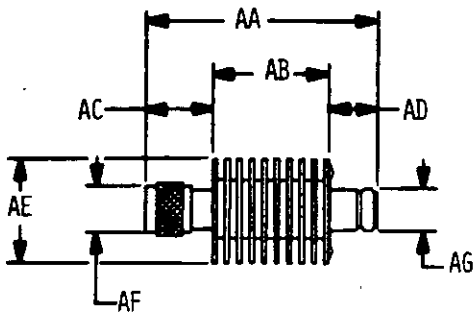


096-08-9

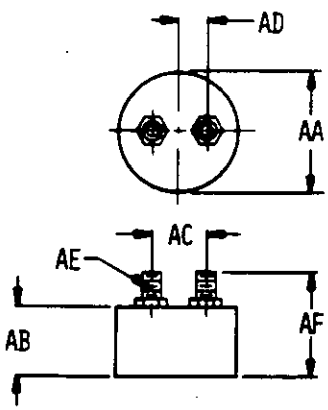


096-09-1

NEW PAGE


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

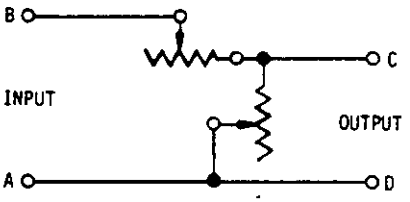


096-10-1

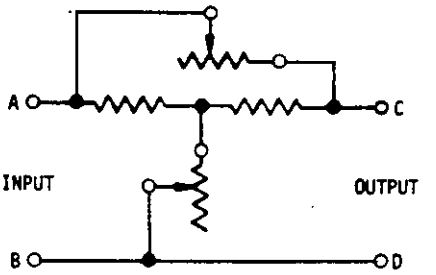

096-10-2

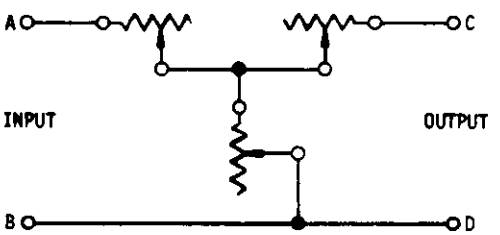


096-10-3

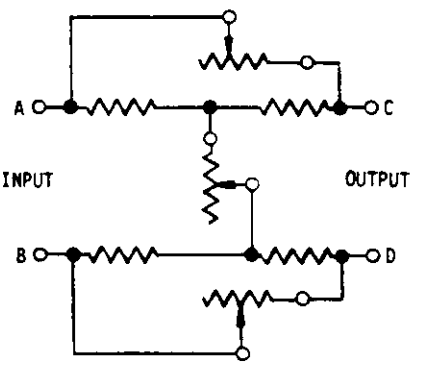


096-10-4

NEW PAGE


Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.




096-10-5



096-10-6



096-10-7



096-10-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

REPRINTED WITHOUT CHANGE
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	10	1413	122	1498	72	1612	16
0102	10	1414	124	1500	112	1613	16
0103	10	1416	124	1502	112	1614	16
0104	10	1418	120	1504	112	1616	16
0105	10	1419	122	1508	112	1618	16
0107	12	1420	122	1509	112	1619	16
0108	12	1421	124	1511	72	1620	20
0700	10	1426	134	1520	72	1634	24
0800	10	1427	134	1529	138	1636	34
1004	10	1428	134	1533	128	1638	34
1005	10	1429	74	1534	128	1640	34
1006	10	1430	134	1535	130	1642	34
1008	10	1431	134	1536	132	1644	34
1009	26	1432	74	1537	132	1646	34
1371	72	1433	120	1538	132	1648	30
1372	72	1435	132	1539	100	1650	30
1373	72	1436	132	1562	14	1652	30
1375	122	1438	134	1563	14	1654	32
1376	72	1439	136	1564	14	1656	32
1377	72	1446	128	1565	14	1657	32
1378	72	1447	128	1566	14	1658	32
1380	70	1448	128	1567	14	1659	32
1381	72	1452	134	1568	14	1676	30
1383	72	1453	134	1569	14	1678	30
1384	70	1455	126	1570	14	1681	30
1386	70	1456	126	1572	14	1682	30
1387	70	1459	134	1573	16	1683	30
1391	78	1462	136	1575	16	1684	30
1394	74	1466	130	1578	16	1686	30
1395	78	1467	130	1584	18	1705	32
1396	74	1470	130	1590	16	1706	32
1397	78	1475	128	1592	16	1707	32
1398	74	1476	130	1594	16	1708	32
1400	74	1478	110	1596	18	1714	20
1404	74	1482	110	1598	18	1715	20
1406	74	1486	110	1601	18	1716	20
1407	70	1488	110	1602	18	1717	20
1410	122	1494	110	1604	18	1719	20
1411	122	1495	110	1608	16	1728	38
1412	122	1497	72	1610	16	1730	38

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1732	38	1994	94	2037	43	2110	66
1734	38	1996	94	2038	43	2112	66
1751	40	1998	94	2039	43	2114	66
1752	40	2000	43	2040	43	2116	66
1757	38	2001	43	2041	43	2118	32
1760	36	2002	43	2042	43	2120	30
1761	36	2003	43	2043	43	2122	30
1770	38	2004	43	2044	43	2124	30
1772	38	2005	43	2045	43	2126	30
1774	38	2006	43	2046	43	2128	32
1776	38	2007	43	2047	43	2130	32
1802	46	2008	43	2048	43	2132	34
1804	46	2009	43	2049	43	2134	34
1806	46	2010	43	2050	43	2136	34
1808	46	2011	43	2051	43	2138	34
1810	46	2012	43	2052	43	2142	36
1814	44	2013	43	2053	43	2160	42
1818	48	2014	43	2054	43	2162	42
1819	48	2015	43	2055	43	2166	42
1820	48	2016	43	2056	43	2168	52
1824	48	2017	43	2057	43	2170	52
1826	48	2018	43	2058	43	2172	56
1930	80	2019	43	2059	43	2174	56
1932	80	2020	43	2060	43	2176	58
1934	80	2021	43	2061	43	2177	58
1936	80	2022	43	2062	43	2178	58
1940	80	2023	43	2063	43	2180	58
1941	80	2024	43	2064	43	2182	58
1942	80	2025	43	2065	43	2184	58
1959	88	2026	43	2066	43	2186	58
1960	88	2027	43	2067	43	2187	58
1961	88	2028	43	2068	43	2188	58
1978	96	2029	43	2069	43	2189	58
1980	96	2030	43	2070	108	2190	58
1982	96	2031	43	2072	108	2192	58
1983	96	2032	43	2100	14	2193	58
1984	96	2033	43	2102	18	2195	60
1985	96	2034	43	2104	18	2210	96
1986	96	2035	43	2106	18	2212	98
1988	96	2036	43	2108	18	2214	106

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2220	110	2311	14	4130	114	4304	37
2222	112	2316	78	4132	114	4305	37
2224	126	3052	106	4134	114	4306	37
2226	128	3054	108	4136	120	4307	37
2228	130	3056	108	4138	122	4308	37
2230	136	3057	108	4140	122	4309	37
2234	136	3058	108	4142	124	4310	37
2236	136	3060	108	4143	126	4311	37
2240	136	3062	108	4144	124	4312	37
2242	136	3063	108	4146	124	4313	37
2244	138	3064	108	4147	124	4314	37
2246	138	3065	108	4150	126	4315	37
2247	138	3068	108	4152	126	4316	37
2248	138	3070	108	4154	126	4317	37
2250	20	3072	106	4158	130	4318	37
2252	20	3073	106	4160	130	4319	37
2254	20	3075	106	4162	130	4320	37
2256	20	3674	106	4166	132	4321	37
2258	22	4009	50	4168	132	4322	37
2260	22	4010	50	4170	132	4323	37
2262	22	4012	50	4174	86	4360	74
2264	22	4014	54	4176	86	4362	74
2266	22	4016	54	4178	86	4364	74
2268	22	4018	54	4222	62	4400	47
2270	22	4040	64	4226	62	4401	47
2272	22	4042	64	4230	62	4402	47
2274	22	4044	64	4271	42	4403	47
2276	22	4050	70	4272	64	4404	47
2278	22	4052	70	4276	44	4405	47
2280	22	4054	70	4278	44	4406	47
2290	22	4100	90	4279	44	4407	47
2292	22	4102	90	4280	44	4408	47
2294	24	4104	90	4284	44	4409	47
2296	24	4106	98	4286	44	4410	47
2298	24	4108	110	4288	44	4411	47
2300	24	4110	110	4292	40	4412	47
2302	24	4112	110	4300	37	4413	47
2304	24	4114	112	4301	37	4414	47
2306	24	4116	112	4302	37	4415	47
2310	14	4118	112	4303	37	4416	47

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4417	47	4457	47	4735	104	4812	66
4418	47	4458	47	4736	102	4813	62
4419	47	4459	47	4737	102	4814	66
4420	47	4460	47	4738	102	4819	64
4421	47	4461	47	4739	102	4820	64
4422	47	4462	47	4740	102	4825	66
4423	47	4463	47	4741	102	4829	94
4424	47	4662	114	4742	102	4830	92
4425	47	4663	116	4743	104	4831	94
4426	47	4664	116	4745	100	4834	92
4427	47	4665	116	4746	100	4835	94
4428	47	4666	114	4748	100	4836	92
4429	47	4667	116	4749	104	4838	94
4430	47	4669	92	4750	104	4839	94
4431	47	4671	92	4751	104	4842	56
4432	47	4672	114	4752	104	4843	82
4433	47	4674	114	4754	60	4844	56
4434	47	4675	114	4755	60	4845	56
4435	47	4683	114	4756	60	4846	56
4436	47	4685	112	4760	60	4848	56
4437	47	4686	112	4761	60	4849	50
4438	47	4689	92	4762	60	4853	64
4439	47	4691	92	4765	98	4856	54
4440	47	4692	92	4766	98	4857	82
4441	47	4694	92	4770	98	4858	82
4442	47	4695	92	4771	98	4861	54
4443	47	4698	92	4772	98	4862	54
4444	47	4700	90	4782	96	4867	56
4445	47	4701	90	4788	64	4869	56
4446	47	4708	128	4790	64	4870	56
4447	47	4709	128	4791	62	4874	54
4448	47	4713	126	4793	64	4875	54
4449	47	4714	126	4795	62	4878	96
4450	47	4715	126	4798	62	4884	50
4451	47	4722	124	4799	62	4885	50
4452	47	4723	124	4803	62	4886	50
4453	47	4730	130	4805	62	4890	64
4454	47	4731	130	4809	66	4891	52
4455	47	4732	102	4810	66	4894	50
4456	47	4734	100	4811	66	4900	52

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4906	48	6219	118	6324	104	7002	140
4908	48	6220	118	6325	104	7003	140
4942	138	6221	118	6326	104	7004	140
4943	138	6222	118	6328	104	7005	140
4944	138	6224	118	6329	104	7021	40
4950	28	6225	118	6330	104	7022	40
4952	100	6228	116	6331	104	7023	40
4956	100	6229	116	6332	106	7024	40
4958	98	6231	118	6333	106	7572	26
4959	98	6232	118	6359	70	7577	26
4960	100	6234	120	6369	10	7580	28
4963	86	6235	120	6370	100	7629	140
4967	84	6236	120	6371	82	7630	140
4968	86	6237	120	6372	140		
4972	86	6238	120	6696	88		
4976	136	6279	94	6697	88		
4977	136	6282	82	6698	88		
4978	132	6283	84	6699	88		
4979	132	6284	84	6700	90		
4980	78	6285	82	6701	90		
4981	78	6286	82	6706	90		
4983	78	6287	84	6707	90		
4984	78	6288	84	6710	88		
4985	78	6289	84	6713	88		
4986	78	6291	80	6870	140		
4989	92	6292	52	6873	10		
4991	78	6293	52	6874	12		
5060	24	6294	52	6921	90		
5061	24	6300	50	6923	90		
5062	26	6308	52	6929	86		
5063	26	6311	52	6930	86		
5068	26	6312	52	6939	90		
5069	26	6315	120	6941	12		
5070	26	6316	120	6942	12		
5071	26	6318	118	6991	142		
5209	138	6319	118	6992	142		
5297	84	6320	102	6993	142		
6205	116	6321	102	6994	142		
6217	116	6322	102	6995	142		
6218	116	6323	102	7001	140		

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE DELETED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Additional Part Marking	142
Additional Requirements	140
Altitude Rating	24
Aperture Cards Required	12
Applicable Documents	142
Attenuation	14, 40
Attenuation Accuracy	44
Average Power Rating	16
Base Document	10
Characteristic/Input Impedance	16
City, State, Zip	10
Class	14
Classification	14
Company Name/Command	10
Configuration	26
Connector	30
Connector Wear Resistance	48
Contract Number/Office Symbol	10
Control, Source	10
Control, Specification	12
Definition of Hermetic Sealing	142
Design and Construction	30
Dielectric Withstanding Voltage At Reduced Barometric Pressure	48
Dielectric Withstanding Voltage At Sea Level	54
Electrical Ratings	14
Electrical Travel	36
Electromagnetic Interference (EMI)	58
Enclosure Construction	30
Finishes	28
Flange	36
Format	10
Fungus	60
Government Design Activity FSCM	10
Humidity	62

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Illustrations	28
Immersion	64
Incremental Attenuation Range	20
Insertion Loss	66
Insulation Resistance	70
Materials	28
Mechanical Backlash	38
Mechanical Travel	38
Metals	28
Moisture Resistance	74
Mounting Hardware	140
Nomenclature	142
Nonturn Device	30
Notes	142
Operating Frequency	18
Operating Frequency Range	16
Output Impedance	18
Packaging	142
Part Marking	140
Part Number	12
Part Number Cross-Reference	142
Peak Power	80
Peak Power Rating	18
Performance Characteristics	138
Phone Number	10
Power Coefficient	20
Quality Assurance Provisions	142

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Radiographic	80
Random Drop	84
Reliability Screening	86
Repeatability	22
Requester's FSCM	10
Requester's Name	10
Resistance to Soldering Heat	90
Resistance to Solvents	92
Revision of AEDPS Document (Number)	12
Rotational Life	94
Salt Spray	96
Sand and Dust	98
Scope	12
Seal	100
Sensitivity of Attenuation	106
Shaft	30
Shock, High Impact	110
Shock, Specified Pulse	112
Solderability	114
Source Table	12
Stop Torque	40
Storage Conditions	138
Street/Building	10
Superseded Document	142
Switch	32
Switch Current Rating	20
Switching Ratings	22
Switch Life Rating	24
Switch Voltage Rating	20
System Application	10
Tabulated Characteristics	28
Temperature Coefficient	24
Temperature High	116
Temperature Low	118
Temperature Ratings	26
Terminal Designations	36
Terminals	34
Terminal Strength	120
Thermal Shock (Temperature Cycling)	124
Turning Torque	38
Type	14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

Page

Units of Measure----------12, 26

Vibration, High Frequency---------- 126
Vibration, Low Frequency---------- 128
Vibration, Random---------- 132
Voltage Rating---------- 18
Voltage Standing Wave Ratio (VSWR)----------24, 136

Weight---------- 40
Workmanship---------- 140

NEW PAGE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY LEFT BLANK

NEW PAGE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
DOD-STD-35-79A	

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

COMMANDER
US ARMY MISSILE COMMAND
ATTN: AMSMI-RD-SE-TD-ST
REDSTONE ARSENAL, AL 35898-5270

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.