DOD-STD-35-8B(MI)

20 February 1979

SUPERSEDING

MIL-STD-35-8A(MI)

31 JULY 1973

MILITARY STANDARD

RELAYS

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

FSC EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Relays
Automated Engineering
Document Preparation System

DOD-STD-35-8B(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-8B(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for Relays.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	6
	2.1	Issues of documents	6
	2.2	Other publications	7
	3.	DEFINITIONS	8
	4.	GENERAL REQUIREMENTS	9
	4.1	Introduction	9
	4.2	Specification Requirement Sheet (SRS)	9
	4.3	Configuration	9
	4.3.1	Dimensions	9
	4.3.2	Illustrations	9
	4.4	Units of measure	9
	5.	DETAILED REQUIREMENTS	10
	5.1	Introduction	10
	5.2	MSE Formats	10
	5.3	Referenced documents	10
	5.4	Test matrix	10
	5.5	Tabulation	12
	5.6	Keyword Code Index (KCI) and Standard Paragraphs	13
	5.6.1	Interrelationship of Codes	13
	5.6.2	Automatic MSE Data	13
	5.6.3	DOD-STD-35 Tables	13

TABLES

Table	I.	Title Index	2
	II.	Test matrix	11
	III.	Tabulation candidates	12

APPENDICES

Appendix	A.	Illustrations	309
	B.	Characteristic Code Index	387
		Index	399

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for Relays.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. It is recommended that MIL-STD-1346, Relays Selection and Application be reviewed prior to using this dash-numbered part book.

The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
RELAY	022500	MIL-R-2033	NAVAL SHIPBOARD
		MIL-R-5757	FOR ELECTRONIC AND COMM EQUIPMENT
		MIL-R-6106	AEROSPACE, GENERAL SPECIFICATION
		MS21035	10AMP, 4PDT
		MS21036	5AMP, 4PDT
		MS21330	12AMP, 3PST
		MS24140	50AMP, 1PST
		MS24141	100AMP, 1PST
		MS24142	200AMP, 1PST
		MS24143	25AMP, 3PST
		MS24149	10AMP, 2PDT
		MS24152	25AMP, 3PDT
		MS24166	50AMP, 1PST
		MS24168	1OOAMP, 3PST
		MS24171	200AMP, 1PST
		MS24172	200AMP, 1PST
		MS24178	55AMP, 2PST
		MS24179	400AMP, 1PST
		MS24181	50AMP, 1PST
		MS24182	1OOAMP, 1PST
		MS24183	200AMP, 1PST
		MS24184	300AMP, 1PST
		MS24185	400AMP, 1PST
		MS24187	50/25AMP, 1PDT
		MS24192	25AMP, 3PST
		MS24193	50AMP, 3PST
		MS24376	50AMP, 3PST
		MS24568	1OAMP, 4PDT
		MS25030	50AMP, 2PDT
		MS25031	1OOAMP, 2PDT
		MS25032	200AMP, 2PDT
		MS25035	25AMP, 1PST
		MS25084	GEN, EQL BUS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
RELAY	022500 (CONT)	MS25267	5AMP, 4PDT
		MS25268	5AMP, 4PDT
		MS25269	5AMP, 6PDT
		MS25270	5AMP, 6PDT
		MS25271	10AMP, 4PDT
		MS25272	10AMP, 4PDT
		MS25273	10AMP, 2PDT
		MS25279	60AMP, 3PDT
		MS25280	10AMP, 4PDT
		MS25321	5AMP, 2PDT
		MS25323	10AMP, 2PDT
		MS25325	5AMP, 4PDT
		MS25327	10AMP, 4PDT
		MS25329	5AMP, 6PDT
		MS25395	5AMP, 2PDT
		MS25455	5AMP, 2PDT
		MS25457	10AMP, 2PDT
		MS25459	5AMP, 4PDT
		MS25461	10AMP, 4PDT
		MS25463	5AMP, 6PDT
		MS25465	5AMP, 2PDT
		MS25466	10AMP, 2PDT
		MS25467	5AMP, 4PDT
		MS25468	10AMP, 4PDT
		MS25469	5AMP, 6PDT
		MS25917	3AMP, 4PDT
		MS25918	3AMP, 6PDT
		MS25919	10AMP, 4PDT
		MS27218	5AMP, 5PDT
		MS27221	50AMP, 3PDT
		MS27222	50AMP, 3PST
		MS27242	100AMP, 1PST
		MS27245	10AMP, 2PDT
		MS27247	10AMP, 2PDT
		MS27254	10AMP, 4PDT
		MS27255	10AMP, 4PDT
		MS27400	10AMP, 4PDT
		MS27401	10AMP, 2PDT
		MS27418	20AMP, 3PST
		MS27425	60AMP, 3PDT
		MS27706	20AMP, 3PST
		MS27707	50AMP, 6PST
		MS27709	10AMP, 4PDT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
RELAY	022500 (CONT)	MS27714	75AMP, 3PST
		MS27715	150AMP, 3PST
		MS27742	25AMP, 3PDT
		MS27743	25AMP, 3PDT
		MS27744	10AMP, 2PDT
		MS27745	10AMP, 4PDT
		MS27749	50AMP, 3PDT
		MS27750	50AMP, 3PDT
		MS27751	50AMP, 3 POLE
		MS27997	25AMP, 3PST
		MIL-R-6463	GENERATOR EQUALIZER BUS
		MIL-R-6466	EXCITER PROTECTION
		MIL-R-6518	INVERTER CHANGEOVER
		MIL-R-7611	115 VOLT, 400 HERTZ, SPST
		MIL-R-7649	3 PHASE, 400 HERTZ
		MIL-R-8373	115 VOLT, 400 HERTZ, SINGLE POLE
		MIL-R-9213	12VDC
		MIL-R-7221	GENERATOR FIELD CONTROL
		MIL-R-13718	24VDC
		MIL-R-15472	115VAC, 115VDC 60 AND 400 HERTZ
		MIL-R-19309	SENSITIVE
		MIL-R-19523	CONTROL, SHIPBOARD
		MIL-R-19648	TIME DELAY
		MIL-R-21187	DPDT, SENSITIVE
		MIL-R-21335	SENSITIVE, DC
		MIL-R-21413	THERMAL
		MIL-R-22527	FIRE CONTROL EQUIPMENT
		MIL-R-25078	GENERATOR OVERVOLTAGE
		MIL-R-26126	OVERVOLTAGE SENSING

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
RELAY	022500 (CONT)	MIL-R-26895	GENERATOR FIELD CONTROL
		MIL-R-28776	ESTABLISHED RELBL, HYB
		MIL-R-39016	ESTABLISHED RELIABILITY
		MIL-R-48309	SENSITIVE AND CONTROL
		MIL-R-50556	DC MAGNETIC LATCHING
		MIL-R-83368	EMI SUPPRESSED
		MIL-R-83372	EMI SUPPRESSED, HYBRID
		MIL-R-83407	MERCURY WETTED REED
		MIL-R-83725	VACUUM DIELECTRIC
		MIL-R-83726	TIME DELAY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-R-5757	Relays, Electrical (For Electronic and Communication Type Equipment), General Specification For
MIL-R-6106	Relays, Electric, Aerospace, General Specification For
MIL-E-13856	Electrical Components for Automotive Vehicles; Waterproofness Tests
MIL-R-19648	Relay, Time Delay, Thermal, General Specification For
MIL-R-22527	Relay Armature
MIL-R-83725	Relay, Vacuum, General Specification For
MIL-R-83726	Relay, Time Delay, Electric and Electronic, General Specification For

STANDARDS

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-202	Test Methods for Electronic and Electrical Parts
MIL-STD-461	Electromagnetic Interference Characteristics, Requirements for Equipment
MIL-STD-462	Electromagnetic Interference Characteristics, Measurement Of

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

MIL-STD-810	Environmental Test Methods for Aerospace and Ground Equipment
MIL-STD-1285	Marking of Electrical and Electronic Parts

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTME380	Metric Practice Guide
ASTMD1868	Standard Method for Detection and Measurement of Corona Pulses in Evaluation of Insulation

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Relays.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for Relays, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Relays.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Relays.

4.3.2 Illustrations. Illustrations applicable to Relays are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Test matrix. A test matrix is supplied as a guide for selecting documents to specify tests (see table II). The test matrix presents documents most applicable for use to satisfy the statement "TEST PER (DOC DES)". Any document listed in the Title Index may be used to satisfy the statement. However, the selected document from the Title Index must contain the desired test. Government test method documents and approved industry standards such as ASTM test methods may also be used to satisfy the statement "TEST PER (DOC DES)".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE II. TEST MATRIX.

DOCUMENT	CODE	1842 Circuit Breaker Compatibility	1861 Coil/Input Driver Current	1892 Coil Inductance	1912 Coil Life	1962 Compartment Pressure	1982 Connector Strength	2002 Contact Bounce	2022 Contact Noise	2092 Continuous Current	2152 Crosstalk	2192 Dropout Voltage or Current	2232 Electrical Power Dissipation	2292 Endurance, Electrical	2332 Endurance, Mechanical	2392 Explosive Decompression	2492 Internal Moisture	2562 Load Transfer	2592 Magnetic Interference	2661 Operate and Release Time	2682 Overload	2732 Pickup Voltage or Current	2752 Recycle Time (Recovery)	2822 Rupture	2982 Temperature-Altitude	3010 Temperature, High	3030 Temperature, Low	3076 Thermal EMF	3132 Transients
MIL-R-5757				X	X			X	X		X	X					X	X	X	X	X	X				X	X	X	
MIL-R-6106	X	X						X		X		X		X	X		X	X		X	X	X		X	X	X	X		
MIL-R-13718		X					X	X												X									X
MIL-R-19648																							X						
MIL-R-22527		X										X								X	X	X							
MIL-R-28776				X				X				X					X		X	X		X				X		X	
MIL-R-39016			X	X								X							X	X		X					X		
MIL-R-83368		X			X			X		X		X	X	X		X				X		X		X	X				
MIL-R-83372		X			X			X		X		X	X	X		X				X		X		X	X				X
MIL-R-83407			X						X			X	X						X	X		X						X	
MIL-R-83725								X				X		X	X					X		X				X	X		
MIL-R-83726	X	X		X							X			X	X					X	X		X					X	X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

5.5 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table III provides codes for column headings which may be used for relay characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

TABLE III. TABULATION CANDIDATES.

COLUMN CODE	COLUMN HEADING	COLUMN CODE	COLUMN HEADING	COLUMN CODE	COLUMN HEADING
1656	POLE	1657	THROW	1616	ENCLOSURE
3603	RATED OPERATING VOLTAGE (VOLTS)	3609	MAXIMUM OPERATING VOLTAGE (VOLTS)	3642	PICKUP VOLTAGE (VOLTS)
3660	DROPOUT VOLTAGE (VOLTS)				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

5.6 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on 'the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.6.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.6.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.6.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT.	0700
ONE SECTION DOCUMENT.	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S)? 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
Use	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6874 THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).

0107

0108 0108.

SCOPE.

SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.

PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.

PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

6941 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.

6942 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME CLASSIFICATION	CHAR CODE
ENCLOSURE DESIGN (DESIGNATION)	1570
VIBRATION CHARACTERISTIC (DESIGNATION)	1572
TEMPERATURE RANGE (DESIGNATION)	1574
SHOCK TYPE (DESIGNATION)	1576
TYPE DESIGNATOR (DESIGNATION)	1578
CLASS (DESIGNATION)	1580
SHOCK CHARACTERISTIC (DESIGNATION)	1582
FAILURE RATE LEVEL (DESIGNATION)	1584
ALTITUDE RATING (DESIGNATION)	1586
CLASSIFICATION ____	1588

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1570	THE ENCLOSURE DESIGN SHALL BE 1570 IN ACCORDANCE WITH THE BASE DOCUMENT.
1572	THE ITEM(S) VIBRATION CHARACTERISTIC SHALL BE 1572 IN ACCORDANCE WITH THE BASE DOCUMENT.
1574	THE ITEM(S) TEMPERATURE RANGE SHALL BE 1574 IN ACCORDANCE WITH THE BASE DOCUMENT.
1576	THE ITEM(S) SHOCK TYPE SHALL BE 1576 IN ACCORDANCE WITH THE BASE DOCUMENT.
1578	THE ITEM(S) TYPE SHALL BE 1578 IN ACCORDANCE WITH THE BASE DOCUMENT.
1580	THE ITEM(S) CLASS SHALL BE 1580 IN ACCORDANCE WITH THE BASE DOCUMENT.
1582	THE ITEM(S) SHOCK CHARACTERISTIC SHALL BE 1582 IN ACCORDANCE WITH THE BASE DOCUMENT.
1584	THE ITEM(S) FAILURE RATE LEVEL SHALL BE 1584 IN ACCORDANCE WITH THE BASE DOCUMENT.
1586	THE ITEM(S) ALTITUDE RATING SHALL BE 1586 IN ACCORDANCE WITH THE BASE DOCUMENT.
1588	THE ITEM(S) CLASSIFICATION SHALL BE 1588 IN ACCORDANCE WITH THE BASE DOCUMENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT RATINGS	
CONTACT CHARACTERISTICS	
SEE CONTACT CHARACTERISTICS TABLE.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

CONTACT CHARACTERISTICS. THE CONTACT CHARACTERISTICS SHALL BE AS SPECIFIED IN THE CONTACT CHARACTERISTICS TABLE.

CONTACT CHARACTERISTICS TABLE

CHARACTERISTIC	PRIMARY CONTACTS	SECONDARY CONTACTS	AUXILIARY CONTACTS
CONTACT IDENTIFICATION	3400	3401	3402
DC RESISTIVE LOAD (VOLTS)	3403	3404	3405
DC RESISTIVE LOAD (AMPERES)	3406	3407	3408
AC RESISTIVE LOAD (VOLTS)	3409	3410	3411
AC RESISTIVE LOAD (AMPERES)	3412	3413	3414
AC RESISTIVE LOAD FREQUENCY (HERTZ)	3415	3416	3417
RESISTIVE LOAD (WATTS)	3418	3419	3420
RESISTIVE LOAD (MILLIWATTS)	3421	3422	3423
RESISTIVE LOAD (VOLT-AMPERES)	3424	3425	3426
DC INDUCTIVE LOAD (VOLTS)	3430	3431	3432
DC INDUCTIVE LOAD (AMPERES)	3433	3434	3435
AC INDUCTIVE LOAD (VOLTS)	3436	3437	3438
AC INDUCTIVE LOAD (AMPERES)	3439	3440	3441
AC INDUCTIVE LOAD FREQUENCY (HERTZ)	3442	3443	3444
INDUCTIVE LOAD (WATTS)	3445	3446	3447
INDUCTIVE LOAD (MILLIWATTS)	3448	3449	3450
INDUCTIVE LOAD (VOLT-AMPERES)	3451	3452	3453
DC MOTOR LOAD (VOLTS)	3454	3455	3456
DC MOTOR LOAD (AMPERES)	3457	3458	3459
AC MOTOR LOAD (VOLTS)	3460	3461	3462
AC MOTOR LOAD (AMPERES)	3463	3464	3465
AC MOTOR LOAD FREQUENCY (HERTZ)	3466	3467	3468
MOTOR LOAD (WATTS)	3469	3470	3471
MOTOR LOAD (MILLIWATTS)	3472	3473	3474
MOTOR LOAD (VOLT-AMPERES)	3475	3476	3477
DC LAMP LOAD (VOLTS)	3478	3479	3480
DC LAMP LOAD (AMPERES)	3481	3482	3483

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT RATINGS (CONT)	
CONTACT CHARACTERISTICS (CONT)	
TEMPERATURE RATING	
MAXIMUM OPERATING (DEGREES CELSIUS)	5069
MAXIMUM NONOPERATING (DEGREES CELSIUS)	5071
MAXIMUM STORAGE (DEGREES CELSIUS)	7302
MAXIMUM SERVICE (DEGREES CELSIUS)	4905

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

CONTACT CHARACTERISTICS TABLE (CONT)

CHARACTERISTIC	PRIMARY CONTACTS	SECONDARY CONTACTS	AUXILIARY CONTACTS
AC LAMP LOAD (VOLTS)	3484	3485	3486
AC LAMP LOAD (AMPERES)	3487	3488	3489
AC LAMP LOAD FREQUENCY (HERTZ)	3490	3491	3492
LAMP LOAD (WATTS)	3493	3494	3495
LAMP LOAD (MILLIWATTS)	3496	3497	3498
LAMP LOAD (VOLT-AMPERES)	3499	3500	3501
3502	3503	3504	3505
3506	3507	3508	3509
3510	3511	3512	3513
3514	3515	3516	3517
3518	3519	3520	3521
3522	3523	3524	3525
3526	3527	3528	3529

NOTE A: 3530.
NOTE B: 35311.
NOTE C: 3532.
NOTE D: 3533.
NOTE E: 3534.
NOTE F: 3535.

TEMPERATURE RATING.

5069 THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS,

5071 THE MAXIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5071 DEGREES CELSIUS.

7302 THE MAXIMUM STORAGE TEMPERATURE RATING SHALL BE 7302 DEGREES CELSIUS.

4905 THE MAXIMUM SERVICE TEMPERATURE RATING SHALL BE 4905 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME

TEMPERATURE RATING (CONT)

MAXIMUM AMBIENT OPERATING (DEGREES CELSIUS)

MINIMUM OPERATING (DEGREES CELSIUS)

MINIMUM NONOPERATING (DEGREES CELSIUS)

MINIMUM STORAGE (DEGREES CELSIUS)

MINIMUM SERVICE (DEGREES CELSIUS)

MINIMUM AMBIENT OPERATING (DEGREES CELSIUS)

NOMINAL OPERATING (DEGREES CELSIUS)

NOMINAL STORAGE (DEGREES CELSIUS)

ALTITUDE RATING

OPERATING (SELECT ONE)

SEA LEVEL TO (FEET)

SEA LEVEL TO (METERS)

NONOPERATING (SELECT ONE)

SEA LEVEL TO (FEET)

SEA LEVEL TO (METERS)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
5054	THE MAXIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5054 DEGREES CELSIUS.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.
5070	THE MINIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5070 DEGREES CELSIUS.
7301	THE MINIMUM STORAGE TEMPERATURE RATING SHALL BE 7301 DEGREES CELSIUS.
4904	THE MINIMUM SERVICE TEMPERATURE RATING SHALL BE 4904 DEGREES CELSIUS.
5052	THE MINIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5052 DEGREES CELSIUS.
5046	THE NOMINAL OPERATING TEMPERATURE RATING SHALL BE 5046 DEGREES CELSIUS.
5048	THE NOMINAL STORAGE TEMPERATURE RATING SHALL BE 5048 DEGREES CELSIUS.
	ALTITUDE RATING.
5060	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5060 FEET.
5061	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5061 METERS.
5062	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5062 FEET.
5063	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5063 METERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LIFE RATING	
MINIMUM MECHANICAL LIFE (OPERATIONS)	1590
MINIMUM ELECTRICAL LIFE (OPERATIONS)	1592
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
*UNITS (SELECT ONE)	
U.S. (SELECT ONE)	
INCHES.	7572
SI (SELECT ONE)	
CENTIMETERS.	7576
MILLIMETERS.	7577
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950

NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	LIFE RATING.
1590	THE ITEM(S) SHALL BE CAPABLE OF A MINIMUM MECHANICAL LIFE OF 1590 OPERATIONS.
1592	THE ITEM(S) SHALL BE CAPABLE OF A MINIMUM ELECTRICAL LIFE OF 1592 OPERATIONS.
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7576	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN CENTIMETERS OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	
MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE IX IS USED.	
METALS	
DISSIMILAR METALS.	7580

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	MATERIAL(S), MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
	FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
7580	METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION	
TERMINAL CHARACTERISTICS	
SEE TERMINAL CHARACTERISTICS TABLE.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

DESIGN AND CONSTRUCTION.

TERMINAL CHARACTERISTICS. THE TERMINAL CHARACTERISTICS SHALL BE AS SPECIFIED IN THE TERMINAL CHARACTERISTICS TABLE.

TERMINAL CHARACTERISTICS

CHARACTERISTIC	TERMINAL GROUP ONE	TERMINAL GROUP TWO	TERMINAL GROUP THREE
TERMINAL IDENTIFICATION	3800	3801	3802
TERMINAL TYPE	3803	3804	3805
WIRE LEAD SIZE (AWG)	3806	3807	3808
THREAD	3809	3810	3811
3812	3813	3814	3815
3816	3817	3818	3819
3820	3821	3822	3823
3824	3825	3826	3827
3828	3829	3830	3831
3832	3833	3834	3835

NOTE A: 3836.
NOTE B: 3837.
NOTE C: 3838.
NOTE D: 3839.
NOTE E: 3840.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
ENCLOSURE (SELECT ONE)	
UNSEALED.	1600
DRIP PROOF.	1602
WATERTIGHT.	1604
EXPLOSIONPROOF.	1606
DUSTPROOF.	1608
ENCLOSED.	1610
SEALED.	1612
HERMETICALLY SEALED.	1614
OTHER ____	1616
CONTACT ARRANGEMENT	
(CIRCUIT)	1651
(FORM)	1652
OTHER ARRANGEMENTS (SELECT ONE)	
SPST.	1653
SPDT.	1654
DPDT.	11655
(POLE)	1656
*(THROW)	1657

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1600	ENCLOSURE. THE ENCLOSURE SHALL BE UNSEALED.
1602	ENCLOSURE. THE ENCLOSURE SHALL BE DRIP PROOF.
1604	ENCLOSURE. THE ENCLOSURE SHALL BE WATERTIGHT.
1606	ENCLOSURE. THE ENCLOSURE SHALL BE EXPLOSIONPROOF.
1608	ENCLOSURE. THE ENCLOSURE SHALL BE DUSTPROOF.
1610	ENCLOSURE. THE ENCLOSURE SHALL BE ENCLOSED.
1612	ENCLOSURE. THE ENCLOSURE SHALL BE SEALED.
1614	ENCLOSURE. THE ENCLOSURE SHALL BE HERMETICALLY SEALED.
1616	ENCLOSURE. THE ENCLOSURE SHALL BE 1616.
	CONTACT ARRANGEMENT. THE CONTACT ARRANGEMENT SHALL BE AS FOLLOWS:
1651	1651 CIRCUIT.
1652	FORM 1652.
1653	SINGLE POLE, SINGLE THROW.
1654	SINGLE POLE, DOUBLE THROW.
1655	DOUBLE POLE, DOUBLE THROW.
1656 1657	1656 POLE, 1657 THROW.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
WEIGHT	
MAXIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024
NOMINAL WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	6996
(POUNDS)	6997
SI (SELECT ONE)	
(GRAMS)	6998
(KILOGRAMS)	6999

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7023	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).
7021	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).
6996	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6996 OUNCE(S).
6997	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6997 POUND(S).
6998	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6998 GRAM(S).
6999	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6999 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
COIL CHARACTERISTICS	
SEE COIL CHARACTERISTICS TABLE.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

COIL CHARACTERISTICS. THE COIL CHARACTERISTICS SHALL BE AS SPECIFIED IN THE COIL CHARACTERISTICS TABLE.

COIL CHARACTERISTICS TABLE

CHARACTERISTIC	SINGLE COIL	COIL A	COIL B
COIL IDENTIFICATION	3600	3601	3602
RATED OPERATING VOLTAGE (VOLTS)	3603	3604	3605
RATED OPERATING VOLTAGE (MILLIVOLTS)	3606	3607	3608
MAXIMUM OPERATING VOLTAGE (VOLTS)	3609	3610	3611
MAXIMUM OPERATING VOLTAGE (MILLIVOLTS)	3612	3613	3614
MINIMUM OPERATING VOLTAGE (VOLTS)	3615	3616	3617
MINIMUM OPERATING VOLTAGE (MILLIVOLTS)	3618	3619	3620
NATURE OF VOLTAGE (AC OR DC)	3621	3622	3623
AC VOLTAGE FREQUENCY (HERTZ)	3624	3625	3626
COIL RESISTANCE (OHMS)	3627	3628	3629
COIL RESISTANCE TOLERANCE (OHMS)	3630	3631	3632
COIL RESISTANCE TOLERANCE (PERCENT)	3633	3634	3635
PICKUP VOLTAGE, 25 DEG C (VOLTS)	3636	3637	3638
PICKUP VOLTAGE, 125 DEG C (VOLTS)	3639	3640	3641
PICKUP VOLTAGE (VOLTS)	3642	3643	3644
PICKUP CURRENT, 25 DEG C (AMPERES)	3645	3646	3647
PICKUP CURRENT, 125 DEG C (AMPERES)	3648	3649	3650
PICKUP CURRENT (AMPERES)	3651	3652	3653
DROPOUT VOLTAGE, 25 DEG C (VOLTS)	3654	3655	3656
DROPOUT VOLTAGE, 125 DEG C (VOLTS)	3657	3658	3659
DROPOUT VOLTAGE (VOLTS)	3660	3661	3662
DROPOUT CURRENT, 25 DEG C (AMPERES)	3663	3664	3665
DROPOUT CURRENT, 125 DEG C (AMPERES)	3666	3667	3668
DROPOUT CURRENT (AMPERES)	3669	3670	3671
RATED OPERATING CURRENT (AMPERES)	3672	3673	3674
MAXIMUM OPERATING CURRENT (AMPERES)	3675	3676	3677
MINIMUM OPERATING CURRENT (AMPERES)	3678	3679	3680

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
COIL CHARACTERISTICS (CONT)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

COIL CHARACTERISTICS TABLE (CONT)

CHARACTERISTIC	SINGLE COIL	COIL A	COIL B
RATED POWER, PICKUP (WATTS)	3681	3682	3683
RATED POWER, PICKUP (MILLIWATTS)	3684	3685	3686
RATED POWER, PICKUP (VOLT-AMPERES)	3687	3688	3689
RATED POWER, OPERATING (WATTS)	3690	3691	3692
RATED POWER, OPERATING (MILLIWATTS)	3693	3694	3695
RATED POWER, OPERATING (VOLT-AMPERES)	3696	3697	3698
RATED POWER (WATTS)	3699	3700	3701
RATED POWER (MILLIWATTS)	3702	3703	3704
RATED POWER (VOLT-AMPERES)	3705	3706	3707
MAX POWER, PICKUP (WATTS)	3708	3709	3710
MAX POWER, PICKUP (MILLIWATTS)	3711	3712	37113
MAX POWER, PICKUP (VOLT-AMPERES)	3714	3715	3716
MAX POWER, OPERATING (WATTS)	3717	3718	3719
MAX POWER, OPERATING (MILLIWATTS)	3720	3721	3722
MAX POWER, OPERATING (VOLT-AMPERES)	3723	3724	3725
MAX POWER (WATTS)	3726	3727	3728
MAX POWER (MILLIWATTS)	3729	3730	3731
MAX POWER (VOLT-AMPERES)	3732	3733	3734
3735	3736	3737	3738
3739	3740	3741	3742
3743	3744	3745	3746
3747	3748	3749	3750
37511	3752	3753	3754
3755	3756	3757	3758

NOTE A: 3761.
NOTE B: 3762.
NOTE C: 3763.
NOTE D: 3764.
NOTE E: 3765.
NOTE F: 3766.
COIL A NOMENCLATURE SHALL BE 3760.
COIL B NOMENCLATURE SHALL BE 3759.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6272
NO EVIDENCE OF PHYSICAL DAMAGE.	6273
NO LAMP IN TEST CIRCUIT SHALL LIGHT.	1547
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY DURING TEST.	1700
MAXIMUM DISCONTINUITY	
OPENING OF CLOSED CONTACTS (SELECT ONE)	
(MICROSECONDS)	1702
(MILLISECONDS)	1704
CLOSING OF OPEN CONTACTS (SELECT ONE)	
(MICROSECONDS)	1706
(MILLISECONDS)	1708
OPENING OR CLOSING OF CONTACTS (SELECT ONE)	
(MICROSECONDS)	1710

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6272 ACCELERATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6272.

6273 ACCELERATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

1547 NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.

1700 THERE SHALL BE NO DISCONTINUITY DURING TEST.

MAXIMUM DISCONTINUITY SHALL BE AS FOLLOWS:

1702 OPENING OF CLOSED CONTACTS SHALL BE NOT GREATER THAN 1702 Microsecond

1704 OPENING OF CLOSED CONTACTS SHALL BE NOT GREATER THAN 1704 Millisecond

1706 CLOSING OF OPEN CONTACTS SHALL BE NOT GREATER THAN 1706 MICROSECOND(S).

1708 CLOSING OF OPEN CONTACTS SHALL BE NOT GREATER THAN 1708 MILLISECOND(S).

1710 OPENING OR CLOSING OF CONTACTS SHALL BE NOT GREATER THAN 1710 MICROSECOND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATION (CONT)	
OPENING OR CLOSING OF CONTACTS (CONT)	
(MILLISECONDS)	1712
REMAIN WITHIN THE FOLLOWING SPECIFIED TOLERANCES:	
CONTACT RESISTANCE/VOLTAGE DROP.	1714
DIELECTRIC WITHSTANDING VOLTAGE.	1716
PICKUP VOLTAGE OR CURRENT.	1718
DROPOUT VOLTAGE OR CURRENT.	1720
OPERATE AND RELEASE TIME.	1722
RECYCLE TIME.	1724
OTHER ____	1726
CONTACTS SHALL REMAIN IN DE-ENERGIZED POSITION WITH NO VOLTAGE ACROSS COIL.	1728
CONTACTS SHALL REMAIN IN ENERGIZED POSITION WITH SPECIFIED COIL VOLTAGE APPLIED.	1730
LATCHED RELAYS SHALL REMAIN LATCHED.	1734
MINIMUM INSULATION RESISTANCE (MEGOHMS)	1732

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1712	OPENING OR CLOSING OF CONTACTS SHALL BE NOT GREATER THAN 1712 MILLISECOND(S).
	THE ITEM(S) SHALL REMAIN WITHIN THE FOLLOWING SPECIFIED TOLERANCES:
1714	CONTACT RESISTANCE/VOLTAGE DROP.
1716	DIELECTRIC WITHSTANDING VOLTAGE.
1718	PICKUP VOLTAGE OR CURRENT.
1720	DROPOUT VOLTAGE OR CURRENT.
1722	OPERATE AND RELEASE TIME.
1724	RECYCLE TIME.
1726	1726.
1728	CONTACTS SHALL REMAIN IN THE DE-ENERGIZED POSITION WITH NO VOLTAGE ACROSS COIL.
1730	THE CONTACTS SHALL REMAIN IN THE ENERGIZED POSITION WITH SPECIFIED COIL VOLTAGE APPLIED.
1734	LATCHED RELAYS SHALL REMAIN LATCHED.
1732	THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 1732 MEGOHM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATION (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6250
PER MIL-STD-202, METHOD 212.	6251
*TEST CONDITION LETTER (SELECT ONE)	
TEST CONDITION LETTER A.	6226
*LEVEL (SELECT ONE)	
20 G'S.	4863
50 G'S.	4864
100 G'S.	4865
TEST CONDITION LETTER B.	6233
*LEVEL (SELECT ONE)	
10,000 G'S.	4868
20,000 G'S.	4892
DIRECTION (SELECT ONE)	
ONE DIRECTION.	1557
BOTH DIRECTIONS.	1558

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6250	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6250.
6251	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 212 OF MIL-STD-202.
6226	TEST CONDITION LETTER A SHALL APPLY.
4863	THE TEST LEVEL SHALL BE 20 G'S.
4864	THE TEST LEVEL SHALL BE 50 G'S.
4865	THE TEST LEVEL SHALL BE 100 G'S.
6233	TEST CONDITION LETTER B SHALL APPLY.
4868	THE TEST LEVEL SHALL BE 10,000 G'S.
4892	THE TEST LEVEL SHALL BE 20,000 G'S.
1557	THE SPECIMEN SHALL BE ACCELERATED IN ONE DIRECTION ONLY.
1558	THE SPECIMEN SHALL BE ACCELERATED IN BOTH DIRECTIONS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME

ACCELERATION (CONT)

TEST CONDITION LETTER (CONT)

TEST CONDITION LETTER C.

*LEVEL (G'S.)

MOUNTING (SELECT ONE)

MOUNT BY ANY SUITABLE METHOD.

MOUNT BY NORMAL METHOD.

MOUNT PER DOCUMENT (DOC DES)

OTHER _____

PERCENT RATED LOAD APPLIED (PERCENT)

MONITOR CONTACT CHATTER PER METHOD 310 OF MIL-STD-202.

*TEST CIRCUIT (LETTER)

*TEST CONDITION (LETTER)

OPEN CONTACTS SHALL BE WIRED _____

CLOSED CONTACTS SHALL BE WIRED _____

COIL VOLTAGE, PERCENT OF RATED (PERCENT)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6239	TEST CONDITION LETTER C SHALL APPLY.
4893	THE TEST LEVEL SHALL BE 4893 G'S.
6263	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
6264	MOUNTING SHALL BE BY THE NORMAL METHOD.
6265	MOUNTING SHALL BE IN ACCORDANCE WITH 6265.
1736	MOUNTING SHALL BE 1736.
6210	THE ELECTRICAL LOAD SHALL BE 6210 PERCENT OF THE RATED LOAD.
1548	MONITORING DURING THE TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1548 SHALL APPLY.
1549	TEST CONDITION LETTER 1549 IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202 SHALL APPLY.
1738	OPEN CONTACTS SHALL BE WIRED 1738.
1740	CLOSED CONTACTS SHALL BE WIRED 1740.
1742	THE COIL VOLTAGE SHALL BE 1742 PERCENT OF THE RATED COIL VOLTAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACOUSTICAL NOISE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1750
AS FOLLOWS:	1752
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY DURING TEST.	1754
MAXIMUM DISCONTINUITY	
OPENING OF CLOSED CONTACTS (SELECT ONE)	
(MICROSECONDS)	1756
(MILLISECONDS)	1758
CLOSING OF OPEN CONTACTS (SELECT ONE)	
(MICROSECONDS)	1760
(MILLISECONDS)	1762
OPENING OR CLOSING OF CONTACTS (SELECT ONE)	
(MICROSECONDS)	1764
(MILLISECONDS)	1766

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1750 ACOUSTICAL NOISE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1750.

1752 ACOUSTICAL NOISE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

1754 THERE SHALL BE NO DISCONTINUITY DURING TEST.

MAXIMUM DISCONTINUITY SHALL BE AS FOLLOWS:

1756 OPENING OF CLOSED CONTACTS SHALL BE NOT GREATER THAN 1756 MICROSECOND(S).

1758 OPENING OF CLOSED CONTACTS SHALL BE NOT GREATER THAN 1758 MILLISECOND(S).

1760 CLOSING OF OPEN CONTACTS SHALL BE NOT GREATER THAN 1760 MICROSECOND(S).

1762 CLOSING OF OPEN CONTACTS SHALL BE NOT GREATER THAN 1762 MILLISECOND(S).

1764 OPENING OR CLOSING OF CONTACTS SHALL BE NOT GREATER THAN 1764 MICROSECOND(S).

1766 OPENING OR CLOSING OF CONTACTS SHALL BE NOT GREATER THAN 1766 MILLISECOND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACOUSTICAL NOISE (CONT)	
AS FOLLOWS: (CONT)	
REMAIN WITHIN THE FOLLOWING SPECIFIED TOLERANCES:	
CONTACT RESISTANCE/VOLTAGE DROP.	1768
DIELECTRIC WITHSTANDING VOLTAGE.	1770
PICKUP VOLTAGE AND CURRENT.	1772
DROPOUT VOLTAGE AND CURRENT.	1774
OTHER _____	1776
NO EVIDENCE OF PHYSICAL DAMAGE.	1778
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1780
PER MIL-STD-810, METHOD 515, PROCEDURE I.	1782
TEST CATEGORY (LETTER)	1784
OPERATION DURING TEST	
OPERATING DURATION (MINUTES)	1786
NONOPERATING DURATION (MINUTES)	1788

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	THE ITEM(S) SHALL REMAIN WITHIN THE FOLLOWING SPECIFIED TOLERANCES:
1768	CONTACT RESISTANCE/VOLTAGE DROP.
1770	DIELECTRIC WITHSTANDING VOLTAGE.
1772	PICKUP VOLTAGE OR CURRENT.
1774	DROPOUT VOLTAGE OR CURRENT.
1776	1776.
1778	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1780	ACOUSTICAL NOISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1780.
1782	ACOUSTICAL NOISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-810, METHOD 515, PROCEDURE I.
1784	TEST CATEGORY 1784 SHALL APPLY.
1786	THE COIL SHALL BE ENERGIZED FOR A PERIOD OF 1786 MINUTE(S).
1788	THE COIL SHALL BE DE-ENERGIZED FOR A PERIOD OF 1788 MINUTE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACOUSTICAL NOISE (CONT)	
PER MIL-STD-810, METHOD 505, PROCEDURE I. (CONT)	
MONITOR CONTACT CHATTER IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202.	
*TEST CIRCUIT (LETTER)	1792
*TEST CONDITION (LETTER)	1794
METHOD OF MOUNTING ____	1790
COIL VOLTAGE (PERCENT OF RATED)	1796
CAPACITANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1800
AS FOLLOWS:	1801
MAXIMUM CAPACITANCE ACROSS OPEN CONTACTS (PICOFARADS)	1802
MAXIMUM CAPACITANCE FROM OPEN CONTACTS TO GROUND (PICOFARADS)	1803
MAXIMUM CAPACITANCE BETWEEN ADJACENT CLOSED CONTACTS (PICOFARADS)	1804

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1792	MONITORING DURING THE TEST SHALL BE IN ACCORDANCE WITH METHOD 3110 OF MIL-STD-202. TEST CIRCUIT LETTER 1792 SHALL APPLY.
1794	TEST CONDITION LETTER 11794 IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202 SHALL APPLY.
1790	THE METHOD OF MOUNTING SHALL BE 1790.
1796	THE COIL VOLTAGE SHALL BE 1796 PERCENT OF THE RATED COIL VOLTAGE.
1800	CAPACITANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1800.
1801	CAPACITANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1802	THE CAPACITANCE ACROSS THE OPEN CONTACTS SHALL BE NOT GREATER THAN 1802 PICOFARAD(S).
1803.	THE CAPACITANCE FROM THE OPEN CONTACTS TO GROUND SHALL BE NOT GREATER THAN 1803 PICOFARAD(S).
1804	THE CAPACITANCE BETWEEN ADJACENT CLOSED CONTACTS SHALL BE NOT GREATER THAN 1804 PICOFARAD(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME

CAPACITANCE (CONT)

AS FOLLOWS: (CONT)

MAXIMUM CAPACITANCE BETWEEN CONTACTS AND COIL (PICOFARADS)

MAXIMUM CAPACITANCE BETWEEN CASE AND COIL (PICOFARADS)

MAXIMUM CAPACITANCE BETWEEN COIL AND GROUND (PICOFARADS)

MAXIMUM CAPACITANCE (PICOFARADS)

TEST METHODS (SELECT ONE)

PER BASE DOCUMENT EXCEPT ____

PER MIL-STD-202, METHOD 305.

TEST FREQUENCY (SELECT ONE)

(HERTZ)

(KILOHERTZ)

(MEGAHERTZ)

MAGNITUDE OF POLARIZING VOLTAGE (VOLTS, DC)

PLUS VOLTAGE TOLERANCE (VOLTS, DC)

MINUS VOLTAGE TOLERANCE (VOLTS, DC)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1806 THE CAPACITANCE BETWEEN THE CONTACTS AND COIL SHALL BE NOT GREATER THAN 1806 PICOFARAD(S).

1807 THE CAPACITANCE BETWEEN THE CASE AND COIL SHALL BE NOT GREATER THAN 1807 PICOFARAD(S).

1808 THE CAPACITANCE BETWEEN THE COIL AND GROUND SHALL BE NOT GREATER THAN 1808 PICOFARAD(S).

1805 CAPACITANCE SHALL BE NOT GREATER THAN 1805 PICOFARAD(S).

1810 CAPACITANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1810.

1811 CAPACITANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-202, METHOD 305.

1812 THE TEST FREQUENCY SHALL BE 1812 HERTZ.

1813 THE TEST FREQUENCY SHALL BE 1813 KILOHERTZ.

1814 THE TEST FREQUENCY SHALL BE 1814 MEGAHERTZ.

1815 THE MAGNITUDE OF THE POLARIZING VOLTAGE SHALL BE 1815 VOLTS, DC.

1816 THE PLUS VOLTAGE TOLERANCE SHALL BE 1816 VOLTS, DC.

1817 THE MINUS VOLTAGE TOLERANCE SHALL BE 1817 VOLTS, DC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CAPACITANCE (CONT)	
PER MIL-STD-202, METHOD 3050 (CONT)	
MEASUREMENT ACCURACY (SELECT ONE)	
(PERCENT)	1818
(PICOFARADS)	1819
POINTS OF MEASUREMENT	
BETWEEN OPEN CONTACTS.	1820
BETWEEN ADJACENT CLOSED CONTACTS.	1821
BETWEEN ONE OPEN CONTACT AND ITS COMMON TERMINAL.	1822
OTHER _____	1823
CIRCUIT BREAKER COMPATIBILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1830
AS FOLLOWS:	1831
NO EVIDENCE OF WELDED CONTACTS OR CONTACT STICKING.	1832

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1818 THE ACCURACY OF THE MEASUREMENT SHALL BE 1818 PERCENT.

1819 THE ACCURACY OF THE MEASUREMENT SHALL BE 1819 PICOFARAD(S).

THE POINTS OF MEASUREMENT SHALL BE AS FOLLOWS:

1820 BETWEEN OPEN CONTACTS.

1821 BETWEEN ADJACENT CLOSED CONTACTS.

1822 BETWEEN ONE OPEN CONTACT AND ITS COMMON TERMINAL.

1823 1823.

1830 CIRCUIT BREAKER COMPATIBILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1830.

1831 CIRCUIT BREAKER COMPATIBILITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

1832 THERE SHALL BE NO EVIDENCE OF WELDED CONTACTS OR CONTACT STICKING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CIRCUIT BREAKER COMPATIBILITY (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	1833
(MILLIOHMS)	1834
MAXIMUM CONTACT VOLTAGE DROP (SELECT ONE)	
(VOLTS)	1835
(MILLIVOLTS)	1836
MAXIMUM TERMINAL TEMPERATURE RISE (DEGREES CELSIUS)	1837
BLOWING OF FUSE CONNECTED BETWEEN CASE AND LOAD GROUND SYSTEM GROUND OR NEUTRAL SHALL CONSTITUTE FAILURE.	1838
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1840
PER DOCUMENT (DOC DES)	1842

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1833	CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1833 OHM(S).
1834	CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1834 MILLIOHM(S).
1835	CONTACT VOLTAGE DROP SHALL BE NOT GREATER THAN 1835 VOLT(S).
1836	CONTACT VOLTAGE DROP SHALL BE NOT GREATER THAN 1836 MILLIVOLT(S).
1837	TERMINAL TEMPERATURE RISE SHALL BE NOT GREATER THAN 1837 DEGREES CELSIUS.
1838	BLOWING OF THE FUSE CONNECTED BETWEEN CASE AND THE LOAD GROUND SYSTEM GROUND OR NEUTRAL SHALL CONSTITUTE FAILURE.
1840	CIRCUIT BREAKER COMPATIBILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1840.
1842	CIRCUIT BREAKER COMPATIBILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1842.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CIRCUIT BREAKER COMPATIBILITY (CONT)	
PER DOCUMENT (CONT)	
NUMBER OF APPLICATIONS (QUANTITY)	1843
TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	1844
(VOLTS, AC)	1845
FREQUENCY (HERTZ)	1846
LOAD TYPE (TYPE)	1847
COOLING DURATION (MINUTES)	1848
TEST TEMPERATURE (DEGREES CELSIUS)	1849
COIL/INPUT DRIVER CURRENT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1850
AS FOLLOWS:	1851
MAXIMUM COIL CURRENT (SELECT ONE)	
(AMPERES)	1852
(MILLIAMPERES)	1853

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1843	THERE SHALL BE 1843 APPLICATION(S).
1844	THE TEST VOLTAGE SHALL BE 1844 VOLTS, DC.
1845	THE TEST VOLTAGE SHALL BE 1845 VOLTS, AC.
1846	THE AC VOLTAGE FREQUENCY SHALL BE 1846 HERTZ.
1847	THE LOAD TYPE SHALL BE 1847.
1848	THE COOLING DURATION SHALL BE 1848 MINUTE(S).
1849	THE TEST TEMPERATURE SHALL BE 1849 DEGREES CELSIUS.
1850	COIL/INPUT DRIVER CURRENT. THE REQUIREMENT SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1850.
1851	COIL/INPUT DRIVER CURRENT. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1852	THE COIL CURRENT SHALL BE NOT GREATER THAN 1852 AMPERE(S).
1853	THE COIL CURRENT SHALL BE NOT GREATER THAN 1853 MILLIAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
COIL/INPUT DRIVER CURRENT (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM INPUT DRIVER CURRENT (SELECT ONE)	
(AMPERES)	1854
(MILLIAMPERES)	1855
TEMPERATURE AT WHICH CURRENT IS SPECIFIED (DEGREES CELSIUS)	1856
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1860
PER DOCUMENT (DOC DES)	1861
MAXIMUM TIME AT WHICH CURRENT IS MEASURED AFTER APPLICATION OF ENERGIZING VOLTAGE (SELECT ONE)	
(SECONDS)	1862
(MINUTES)	1863

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1854 THE INPUT DRIVER CURRENT SHALL BE NOT GREATER THAN 1854 AMPERE(S).

1855 THE INPUT DRIVER CURRENT SHALL BE NOT GREATER THAN 1855 MILLIAMPERE(S).

1856 THE TEMPERATURE AT WHICH THE CURRENT IS SPECIFIED SHALL BE 1856 DEGREES CELSIUS.

1860 COIL/INPUT DRIVER CURRENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1860.

1861 COIL/INPUT DRIVER CURRENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1861.

1862 THE TIME AT WHICH CURRENT IS MEASURED AFTER APPLICATION OF ENERGIZING VOLTAGE SHALL BE NOT GREATER THAN 1862 SECOND(S).

1863 THE TIME AT WHICH CURRENT IS MEASURED AFTER APPLICATION OF ENERGIZING VOLTAGE SHALL BE NOT GREATER THAN 1863 MINUTE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
COIL/INPUT DRIVER CURRENT (CONT)	
PER DOCUMENT (CONT)	
TEST VOLTAGE (SELECT ONE)	
(PERCENT OF RATED VOLTAGE)	1864
(VOLTS, DC)	1865
(VOLTS, AC)	1866
TEST TEMPERATURE (DEGREES CELSIUS)	1867
COIL INDUCTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1870
AS FOLLOWS:	1872
MAXIMUM COIL INDUCTANCE (SELECT ONE)	
(MILLIHENRIES)	1874
(MICROHENRIES)	1876
NOMINAL COIL INDUCTANCE (SELECT ONE)	
(MILLIHENRIES)	1878
(MICROHENRIES)	1880

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1864	THE TEST VOLTAGE SHALL BE 1864 PERCENT OF THE RATED COIL OR INPUT VOLTAGE.
1865	THE TEST VOLTAGE SHALL BE 1865 VOLTS, DC.
1866	THE TEST VOLTAGE SHALL BE 1866 VOLTS, AC.
1867	THE TEST TEMPERATURE SHALL BE 1867 DEGREES CELSIUS.
1870	COIL INDUCTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1870.
1872	COIL INDUCTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1874	COIL INDUCTANCE SHALL BE NOT GREATER THAN 1874 MILLIHENRY(S).
1876	COIL INDUCTANCE SHALL BE NOT GREATER THAN 1876 MICROHENRIES.
1878	COIL INDUCTANCE SHALL BE 1878 MILLIHENRY(S).
1880	COIL INDUCTANCE SHALL BE 1880 MICROHENRIES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
COIL INDUCTANCE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1890
PER DOCUMENT (DOC DES)	1892
TEST FREQUENCY (SELECT ONE)	
(HERTZ)	1894
(KILOHERTZ)	1896
RELAY ARMATURE HELD IN OPERATED POSITION.	1898
COIL LIFE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1900
AS FOLLOWS:	1902
NO EVIDENCE OF DAMAGE.	1904
REMAIN WITHIN SPECIFIED TOLERANCES.	1906
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1910

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1890	COIL INDUCTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1890.
1892	COIL INDUCTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1892.
1894	THE TEST FREQUENCY SHALL BE 1894 HERTZ.
1896	THE TEST FREQUENCY SHALL BE 1896 KILOHERTZ.
1898	THE RELAY ARMATURE SHALL BE HELD IN THE OPERATED POSITION.
1900	COIL LIFE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1900.
1902	COIL LIFE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1904	THERE SHALL BE NO EVIDENCE OF DAMAGE.
1906	THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE(S).
1910	COIL LIFE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1910.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
COIL LIFE (CONT)	
TEST METHODS (CONT)	
PER DOCUMENT (DOC DES)	1912
TEST DURATION (HOURS)	1914
MAXIMUM TEST TEMPERATURE (DEGREES CELSIUS)	1916
MINIMUM TEST TEMPERATURE (DEGREES CELSIUS)	1917
MAXIMUM HEATING AND COOLING RATE (DEGREES PER SECOND)	1918
PERCENT OF TEST RUN AT MINIMUM TEMPERATURE (PERCENT)	1919
COIL OVERLOAD	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1920
AS FOLLOWS:	1921
MAXIMUM COIL RESISTANCE (OHMS)	1922

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1912	COIL LIFE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1912.
1914	THE TEST DURATION SHALL BE 119114 HOUR(S).
1916	THE TEST TEMPERATURE SHALL BE NOT GREATER THAN 1916 DEGREES CELSIUS.
1917	THE TEST TEMPERATURE SHALL BE NOT LESS THAN 1917 DEGREES CELSIUS.
1918	THE HEATING AND COOLING RATE SHALL BE NOT GREATER THAN 1918 DEGREES PER SECOND.
1919	1919 PERCENT OF THE TEST RUN SHALL BE RUN AT THE MINIMUM TEMPERATURE.
1920	COIL OVERLOAD. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1920.
1921	COIL OVERLOAD. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1922	THE COIL RESISTANCE SHALL BE NOT GREATER THAN 1922 OHM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
COIL OVERLOAD (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM COIL CURRENT	
(AMPERES)	1923
(MILLIAMPERES)	1924
MAXIMUM COIL TEMPERATURE RISE (DEGREES CELSIUS)	1925
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1930
PER MIL-R-22527.	1931
TEST VOLTAGE (SELECT ONE)	
(PERCENT OF RATED VOLTAGE)	1932
(VOLTS, AC)	1933
(VOLTS, DC)	1934
TEST CURRENT (SELECT ONE)	
(PERCENT OF RATED CURRENT)	1935
(AMPERES)	1936
(MILLIAMPERES)	1937

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1923	THE COIL CURRENT SHALL BE NOT GREATER THAN 1923 AMPERE(S).
1924	THE COIL CURRENT SHALL BE NOT GREATER THAN 1924 MILLIAMPERE(S).
1925	THE COIL TEMPERATURE RISE SHALL BE NOT GREATER THAN 1925 DEGREES CELSIUS.
1930	COIL OVERLOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1930.
1931	COIL OVERLOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-22527.
1932	THE TEST VOLTAGE SHALL BE 1932 PERCENT OF THE RATED VOLTAGE.
11933	THE TEST VOLTAGE SHALL BE 1933 VOLTS, AC.
1934	THE TEST VOLTAGE SHALL BE 1934 VOLTS, DC.
1935	THE TEST CURRENT SHALL BE 1935 PERCENT OF THE RATED CURRENT.
1936	THE TEST CURRENT SHALL BE 1936 AMPERE(S).
1937	THE TEST CURRENT SHALL BE 11937 MILLIAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
COIL OVERLOAD (CONT)	
PER MIL-R-22527. (CONT)	
COIL TEST DURATION (HOURS)	1938
TEST DURATION AT MAXIMUM OPERATING TEMPERATURE (HOURS)	1939
TEST DURATION AT ROOM AMBIENT TEMPERATURE (HOURS)	1940
COIL POWER INTERRUPTION RATE (CYCLES PER MINUTE)	1941
COIL POWER INTERRUPTION DURATION (CYCLES)	1942
CONTACT LOAD (PERCENT OF RATED LOAD)	1943
CONTACT LOAD TYPE (TYPE)	1944
COMPARTMENT PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1950
AS FOLLOWS:	1952
NO EVIDENCE OF DAMAGE.	1953

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1938 THE COIL TEST DURATION SHALL BE 1938 HOUR(S).

1939 THE DURATION AT THE MAXIMUM OPERATING TEMPERATURE SHALL BE 1939 HOUR(S).

1940 THE DURATION AT ROOM AMBIENT TEMPERATURE SHALL BE 1940 HOUR(S).

1941 THE COIL POWER INTERRUPTION RATE SHALL BE 1941 CYCLES PER MINUTE.

1942 THE COIL POWER INTERRUPTION DURATION SHALL BE AT 1942 CYCLE(S).

1943 THE CONTACT LOAD SHALL BE 1943 PERCENT OF THE RATED LOAD.

1944 THE CONTACT LOAD TYPE SHALL BE 1944.

1950 COMPARTMENT PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1950.

1952 COMPARTMENT PRESSURE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

1953 THERE SHALL BE NO EVIDENCE OF DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
COMPARTMENT PRESSURE (CONT)	
AS FOLLOWS: (CONT)	
REMAIN WITHIN THE FOLLOWING SPECIFIED TOLERANCES:	
DIELECTRIC WITHSTANDING VOLTAGE.	1954
PICKUP VOLTAGE OR CURRENT.	1955
DROPOUT VOLTAGE OR CURRENT.	1956
OTHER _____	1957
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1960
PER DOCUMENT (DOC DES)	1962
TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH, ABSOLUTE)	1963
(KILOPASCALS, ABSOLUTE)	1964
TEST PRESSURE HOLDING DURATION (SELECT ONE)	
(MINUTES)	1965
(HOURS.)	1966

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

THE ITEM(S) SHALL REMAIN WITHIN THE FOLLOWING SPECIFIED TOLERANCES:

1954 DIELECTRIC WITHSTANDING VOLTAGE.

1955 PICKUP VOLTAGE OR CURRENT.

1956 DROPOUT VOLTAGE OR CURRENT.

1957 1957.

1960 COMPARTMENT PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1960.

1962 COMPARTMENT PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1962.

1963 THE TEST PRESSURE SHALL BE 1963 POUNDS PER SQUARE INCH, ABSOLUTE.

1964 THE TEST PRESSURE SHALL BE 1964 KILOPASCAL(S), ABSOLUTE.

1965 THE TEST PRESSURE HOLDING DURATION SHALL BE 1965 MINUTE(S).

1966 THE TEST PRESSURE HOLDING DURATION SHALL BE 1966 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONNECTOR STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1970
AS FOLLOWS:	1972
NO EVIDENCE OF PHYSICAL DAMAGE,	1973
NO PERMANENT DEFORMATION.	1974
REMAIN WITHIN SPECIFIED TOLERANCES.	1975
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1980
PER DOCUMENT (DOC DES)	1982
TEST LOAD (SELECT ONE)	
(POUNDS)	1983
(KILOGRAMS)	1984
CONTACT BOUNCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1990

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1970	CONNECTOR STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1970.
1972	CONNECTOR STRENGTH. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1973	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1974	THERE SHALL BE NO PERMANENT DEFORMATION.
1975	THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE(S).
1980	CONNECTOR STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1980.
11982	CONNECTOR STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1982.
1983	THE TEST LOAD SHALL BE 1983 POUND(S).
1984	THE TEST LOAD SHALL BE 1984 KILOGRAM(S).
1990	CONTACT BOUNCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1990.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT BOUNCE (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	1992
MAXIMUM CONTACT BOUNCE (SELECT ONE)	
(MILLISECONDS)	1993
(MICROSECONDS)	1994
NO SINGLE READING SHALL EXCEED SPECIFIED CONTACT BOUNCE DURATION.	1995
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2000
PER DOCUMENT (DOC DES)	2002
COIL VOLTAGE (PERCENT OF RATED COIL VOLTAGE)	2003
NUMBER OF READINGS REQUIRED TO DETERMINE CONTACT BOUNCE (QUANTITY)	2004
CONTACT LOAD	
PERCENT OF RATED (PERCENT)	2005

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1992	CONTACT BOUNCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1993	CONTACT BOUNCE SHALL BE NOT GREATER THAN 1993 MILLISECOND(S).
1994	CONTACT BOUNCE SHALL BE NOT GREATER THAN 1994 MICROSECOND(S).
1995	NO SINGLE READING SHALL EXCEED SPECIFIED CONTACT BOUNCE DURATION.
2000	CONTACT BOUNCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2000.
2002	CONTACT BOUNCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 20020
2003	THE COIL VOLTAGE SHALL BE 2003 PERCENT OF THE RATED COIL VOLTAGE.
2004	THERE SHALL BE 2004 READINGS REQUIRED TO DETERMINE CONTACT BOUNCE.
2005	THE CONTACT LOAD SHALL BE 2005 PERCENT OF THE RATED LOAD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT BOUNCE (CONT)	
CONTACT LOAD (CONT)	
MAXIMUM CURRENT (SELECT ONE)	
(AMPERES)	2006
(MILLIAMPERES)	2007
MAXIMUM VOLTAGE (SELECT ONE)	
(VOLTS)	2008
(MILLIVOLTS)	2009
CONTACT NOISE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2010
AS FOLLOWS:	2012
MAXIMUM PEAK-TO-PEAK VOLTAGE AFTER DECAY DURATION (SELECT ONE)	
(MILLIVOLTS)	2013
(MICROVOLTS)	2014

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2006	THE CONTACT LOAD SHALL BE NOT GREATER THAN 2006 AMPERE(S).
2007	THE CONTACT LOAD SHALL BE NOT GREATER THAN 2007 MILLIAMPERE(S).
2008	THE CONTACT LOAD SHALL BE NOT GREATER THAN 2008 VOLT(S).
2009	THE CONTACT LOAD SHALL BE NOT GREATER THAN 2009 MILLIVOLT(S).
2010	CONTACT NOISE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2010.
2012	CONTACT NOISE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2013	THE PEAK-TO-PEAK VOLTAGE AFTER DECAY DURATION SHALL BE NOT GREATER THAN 2013 MILLIVOLT(S).
2014	THE PEAK-TO-PEAK VOLTAGE AFTER DECAY DURATION SHALL BE NOT GREATER THAN 2014 MICROVOLT(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT NOISE (CONT)	
AS FOLLOWS: (CONT)	
DECAY DURATION (SELECT ONE)	
(MILLISECONDS)	2015
(SECONDS)	2016
BANDWIDTH (HERTZ)	2017
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2020
PER DOCUMENT (DOC DES)	2022
TEST VOLTAGE (PERCENT OF RATED VOLTAGE)	2023
MAXIMUM PULSE RATE (HERTZ)	2024
"ON" AND "OFF" DURATION APPROXIMATELY EQUAL.	2025
CONTACT RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2030
AS FOLLOWS:	2032

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2015	THE DECAY DURATION SHALL BE 2015 MILLISECOND(S).
2016	THE DECAY DURATION SHALL BE 2016 SECOND(S).
2017	THE BANDWIDTH SHALL BE 2017 HERTZ.
2020	CONTACT NOISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 20200
2022	CONTACT NOISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2022.
2023	THE TEST 'VOLTAGE SHALL BE 2023 PERCENT OF THE RATED CONTACT VOLTAGE.
2024	THE PULSE RATE SHALL BE NOT GREATER THAN 2024 HERTZ.
2025	THE 'ON' AND 'OFF' DURATION SHALL BE APPROXIMATELY EQUAL.
2030	CONTACT RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2030.
2032	CONTACT RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT RESISTANCE (CONT)	
AS FOLLOWS:	
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	2033
(MILLIOHMS)	2034
MAXIMUM VOLTAGE DROP (SELECT ONE).	
(VOLTS)	2036
(MILLIVOLTS)	2035
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2040
PER MIL-STD-202, METHOD 307.	2042
TEST CURRENT (SELECT ONE)	
MAXIMUM RATED CURRENT	2043
(AMPERES)	2044
(MILLIAMPERES)	2045

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2033	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2033 OHM(S).
2034	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2034 MILLIOHM(S).
2036	THE VOLTAGE DROP SHALL BE NOT GREATER THAN 2036 VOLT(S).
2035	THE VOLTAGE DROP SHALL BE NOT GREATER THAN 2035 MILLIVOLT(S).
2040	CONTACT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2040.
2042	CONTACT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-202, METHOD 3070
2043	THE TEST CURRENT SHALL BE THE MAXIMUM RATED CURRENT FOR THE CONTACTS.
2044	THE TEST CURRENT SHALL BE 2044 AMPERE(S).
2045	THE TEST CURRENT SHALL BE 2045 MILLIAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 307. (CONT)	
MAXIMUM OPEN-CIRCUIT TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	2046
(MILLIVOLTS, DC)	2047
(VOLTS, AC)	2048
(MILLIVOLTS, AC)	2049
NUMBER OF ACTIVATIONS PRIOR TO MEASUREMENT (QUANTITY)	2050
NUMBER OF TEST ACTIVATIONS (QUANTITY)	2051
NUMBER OF MEASUREMENTS PER ACTIVATION (QUANTITY)	2052
MAXIMUM MEASUREMENT ERROR (PERCENT)	2055
METHOD OF CONNECTION _____	2053
POINTS OF MEASUREMENT _____	2054
CONTACT STICKING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2060

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2046 THE OPEN-CIRCUIT TEST VOLTAGE SHALL BE NOT GREATER THAN 2046 VOLTS, DC.

2047 THE OPEN-CIRCUIT TEST VOLTAGE SHALL BE NOT GREATER THAN 2047 MILLIVOLTS, DC.

2048 THE OPEN-CIRCUIT TEST VOLTAGE SHALL BE NOT GREATER THAN 2048 VOLTS, AC.

2049 THE OPEN-CIRCUIT TEST VOLTAGE SHALL BE NOT GREATER THAN 2049 MILLIVOLTS, AC.

2050 THERE SHALL BE 2050 ACTIVATION(S) PRIOR TO MEASUREMENT.

2051 THERE SHALL BE 2051 TEST ACTIVATION(S).

2052 THERE SHALL BE 2052 MEASUREMENT(S) PER ACTIVATION.

2055 THE MEASUREMENT ERROR SHALL BE NOT GREATER THAN 2055 PERCENT.

2053 THE METHOD OF CONNECTION SHALL BE 2053.

2054 THE POINT(S) OF MEASUREMENT SHALL BE 2054.

2060 CONTACT STICKING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2060.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT STICKING (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	2062
MAXIMUM CONTACT RELEASE DURATION (SELECT ONE)	
(MILLISECONDS)	2063
(MICROSECONDS)	2064
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2070
PER MIL-R-5757.	2072
ENERGIZED DURATION (HOURS)	2073
COIL VOLTAGE (SELECT ONE)	
(PERCENT OF RATED VOLTAGE)	2074
(VOLTS, AC)	2075
(VOLTS, DC)	2076
CONTINUOUS CURRENT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2080

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2062 CONTACT STICKING. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2063 THE CONTACT RELEASE DURATION SHALL BE NOT GREATER THAN 2063 MILLISECOND(S).

2064 THE CONTACT RELEASE DURATION SHALL BE NOT GREATER THAN 2064 MICROSECOND(S).

2070 CONTACT STICKING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2070.

2072 CONTACT STICKING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-5757.

2073 THE ENERGIZED DURATION SHALL BE 2073 HOUR(S).

2074 THE COIL VOLTAGE SHALL BE 2074 PERCENT OF THE RATED VOLTAGE.

2075 THE COIL VOLTAGE SHALL BE 2075 VOLTS, AC.

2076 THE COIL VOLTAGE SHALL BE 2076 VOLTS, DC.

2080 CONTINUOUS CURRENT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2080.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTINUOUS CURRENT (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	2082
NO EVIDENCE OF DAMAGE.	2083
NO LOOSENING OF TERMINALS	2084
REMAIN WITHIN SPECIFIED TOLERANCES.	2085
MAXIMUM TEMPERATURE RISE	
TERMINALS (DEGREES CELSIUS)	2086
COIL (DEGREES CELSIUS)	2087
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2090
PER DOCUMENT (DOC DES)	2092
TEST TEMPERATURE (SELECT ONE)	
MAXIMUM SPECIFIED OPERATING TEMPERATURE	2093
(DEGREES CELSIUS)	2094

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2082	CONTINUOUS CURRENT. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2083	THERE SHALL BE NO EVIDENCE OF DAMAGE.
2084	THERE SHALL BE NO LOOSENING OF TERMINALS.
2085	THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE(S).
2086	THE TEMPERATURE RISE OF THE TERMINALS SHALL BE NOT GREATER THAN 2086 DEGREES CELSIUS.
2087	THE TEMPERATURE RISE OF THE COIL SHALL BE NOT GREATER THAN 2087 DEGREES CELSIUS.
2090	CONTINUOUS CURRENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2090.
2092	CONTINUOUS CURRENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2092.
2093	THE TEST TEMPERATURE SHALL BE THE MAXIMUM SPECIFIED OPERATING TEMPERATURE.
2094	THE TEST TEMPERATURE SHALL BE 2094 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTINUOUS CURRENT (CONT)	
PER DOCUMENT (CONT)	
TEST ALTITUDE (SELECT ONE)	
MAXIMUM SPECIFIED ALTITUDE	2095
(FEET)	2096
(METERS)	2097
CONTACT LOAD (SELECT ONE)	
(PERCENT OF RATED LOAD)	2098
(AMPERES)	2099
TEST DURATION (HOURS)	2100
DUTY CYCLE	
"ON" (SECONDS)	2101
"OFF" (SECONDS)	2102
CORONA	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2110
AS FOLLOWS:	2112

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2095	THE TEST ALTITUDE SHALL BE THE MAXIMUM SPECIFIED ALTITUDE.
2096	THE TEST ALTITUDE SHALL BE 2096 FEET.
2097	THE TEST ALTITUDE SHALL BE 2097 METERS.
2098	THE CONTACT LOAD SHALL BE 2098 PERCENT OF THE RATED LOAD.
2099	THE CONTACT LOAD SHALL BE 2099 AMPERE(S).
2100	THE TEST DURATION SHALL BE 2100 HOUR(S).
	THE DUTY CYCLE SHALL BE AS FOLLOWS:
2101	'ON' 2101 SECOND(S).
2102	'OFF' 2102 SECOND(S).
2110	CORONA. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT? EXCEPT 2110.
2112	CORONA. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CORONA (CONT)	
AS FOLLOWS: (CONT)	
NO EVIDENCE OF CORONA.	2113
MINIMUM CORONA STARTING VOLTAGE (VOLTS)	2114
MINIMUM CORONA EXTINCTION VOLTAGE (VOLTS)	2115
MAXIMUM APPARENT CORONA CHARGE AT CORONA STARTING VOLTAGE (PICOCOULOMBS)	2116
MAXIMUM CORONA CHARGE (PICOCOULOMBS)	2117
*TEST VOLTAGE (VOLTS)	2118
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2120
PER DOCUMENT (DOC DES)	2122
TEST VOLTAGE (SELECT ONE)	
(VOLTS, AC)	2124
FREQUENCY (HERTZ)	2125
(VOLTS, DC)	2126

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2113	THERE SHALL BE NO EVIDENCE OF CORONA.
2114	THE VOLTAGE AT WHICH CORONA IS CONTINUOUS (CORONA STARTING VOLTAGE) SHALL BE NOT LESS THAN 2114 VOLT(S).
2115	THE VOLTAGE AT WHICH CORONA DISAPPEARS COMPLETELY (CORONA EXTINCTION VOLTAGE) SHALL BE NOT LESS THAN 2115 VOLT(S).
2116	THE APPARENT CORONA CHARGE SHALL BE NOT GREATER THAN 2116 PICOCOULOMB(S) AT THE CORONA STARTING VOLTAGE.
2117 2118	THE APPARENT CORONA CHARGE SHALL BE NOT GREATER THAN 2117 PICOCOULOMB(S) AT 2118 VOLT(S).
2120	CORONA. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2120.
2122	CORONA. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2122.
2124	THE TEST VOLTAGE SHALL BE 2124 VOLTS, AC.
2125	THE AC VOLTAGE FREQUENCY SHALL BE 2125 HERTZ.
2126	THE TEST VOLTAGE SHALL BE 2126 VOLTS, DC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CORONA (CONT)	
TEST METHODS (CONT)	
PER ASTMD1868.	2127
MINIMUM EQUIPMENT SENSITIVITY (PICOCOULOMBS)	2128
TEST VOLTAGE (SELECT ONE)	
(VOLTS, AC)	2129
(PERCENT OF RATED)	2130
(VOLTS, DC)	2132
TEST VOLTAGE FREQUENCY (HERTZ)	2133
SUPERIMPOSED TEST VOLTAGE (VOLTS RMS)	2134
*VOLTAGE (VOLTS, DC)	2135
CROSSTALK	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2140
MINIMUM ATTENUATION (DECIBELS)	2142
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2150

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2127 CORONA. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD1868.

2128 THE EQUIPMENT SHALL HAVE A SENSITIVITY CAPABLE OF DETECTING A PULSE LEVEL OF 21128 PICOCOULOMB(S) OR LARGER.

2129 THE TEST VOLTAGE SHALL BE 21129 VOLTS, AC.

2130 THE TEST VOLTAGE SHALL BE 2130 PERCENT OF RATED VOLTAGE.

2132 THE TEST VOLTAGE SHALL BE 2132 VOLTS, DC.

2133 THE FREQUENCY OF THE AC VOLTAGE SHALL BE 21133 HERTZ.

2134 THE TEST VOLTAGE SHALL BE 2134 VOLTS RMS SUPERIMPOSED
2135 ON A DC VOLTAGE OF 2135 VOLT(S).

2140 CROSSTALK. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2140.

2142 CROSSTALK. THE ATTENUATION SHALL BE NOT LESS THAN 2142 DECIBEL(S).

2150 CROSSTALK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2150.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CROSSTALK (CONT)	
TEST METHODS (CONT)	
PER DOCUMENT (DOC DES)	2152
PEAK-TO-PEAK TEST VOLTAGE (VOLTS)	2153
TEST FREQUENCY (SELECT ONE)	
(HERTZ)	2154
(KILOHERTZ)	2155
(MEGAHERTZ)	2156
DC RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2160
AS FOLLOWS:	2162
COIL RESISTANCE (OHMS)	2163
TOLERANCE (SELECT ONE)	
PLUS OR MINUS (OHMS)	2164
PLUS OR MINUS (PERCENT)	2165

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2152	CROSSTALK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2152.
2153	THE PEAK-TO-PEAK TEST VOLTAGE SHALL BE 2153 VOLT(S).
2154	THE TEST FREQUENCY SHALL BE 2154 HERTZ.
2155	THE TEST FREQUENCY SHALL BE 2155 KILOHERTZ.
2156	THE TEST FREQUENCY SHALL BE 2156 MEGAHERTZ.
2160	DC RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2160.
2162	DC RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2163	THE COIL RESISTANCE SHALL BE 2163 OHM(S).
2164	THE COIL RESISTANCE TOLERANCE SHALL BE PLUS OR MINUS 2164 OHM(S).
2165	THE COIL RESISTANCE TOLERANCE SHALL BE PLUS OR MINUS 2165 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DC RESISTANCE (CONT)	
AS FOLLOWS: (CONT)	
RESISTANCE BETWEEN CASE AND MOUNTING (SELECT ONE)	
(OHMS)	2166
(MILLIOHMS)	2167
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2170
PER MIL-STD-202, METHOD 3030	2172
LIMIT OF ERROR OF MEASURING APPARATUS (PERCENT)	2173
TEST VOLTAGE (VOLTS DC)	2174
MAXIMUM PERIOD OF INTERRUPTED VOLTAGE (SECONDS)	2175
MINIMUM TEMPERATURE STABILIZATION DURATION (HOURS)	2176
STABILIZATION TEMPERATURE (DEGREES CELSIUS)	2177
POINTS OF MEASUREMENT ____	2178

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2166	THE RESISTANCE BETWEEN CASE AND MOUNTING SHALL BE 2166 OHM(S).
2167	THE RESISTANCE BETWEEN CASE AND MOUNTING SHALL BE 2167 MILLIOHM(S).
2170	DC RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2170.
2172	DC RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-202, METHOD 303.
2173	THE LIMIT OF ERROR OF MEASURING APPARATUS SHALL BE 2173 PERCENT.
2174	THE TEST VOLTAGE SHALL BE 2174 VOLTS DC.
2175	THE PERIOD OF UNINTERRUPTED VOLTAGE SHALL BE NOT GREATER THAN 2175 SECOND(S).
2176	THE TEMPERATURE STABILIZATION DURATION SHALL BE NOT LESS THAN 2176 HOUR(S).
2177	THE STABILIZATION TEMPERATURE SHALL BE 21177 DEGREES CELSIUS.
2178	THE POINTS OF MEASUREMENT SHALL BE 2178.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4908
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4906
MAXIMUM LEAKAGE (SELECT ONE)	
(MILLIAMPERES)	4894
(MICROAMPERES)	4896
REMAIN WITHIN SPECIFIED TOLERANCE.	4901
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4884
PER MIL-STD-202, METHOD 301.	6300
*ALTITUDE PER METHOD 105 OF MIL-STD-202	
*TEST CONDITION (LETTER)	4886

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4908	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4908.
4906	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4894	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4894 MILLIAMPERE(S).
4896	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4896 MICROAMPERE.
4901	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4884	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4884.
6300	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.
4886	ALTITUDE SHALL BE IN ACCORDANCE WITH TEST CONDITION LETTER 4886 OF METHOD 105 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4885
(VOLTS, AC)	4849
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	6311
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	6312
BETWEEN MUTUALLY INSULATED PARTS.	6292
BETWEEN ALL INSULATED PARTS AND GROUND.	6293
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	6294
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4859
DURATION OF VOLTAGE APPLICATION (SECONDS)	4891
MOUNTING PER DOCUMENT (DOC DES)	6280
REGULATION OF TEST VOLTAGE (PERCENT)	6308

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4885 TEST VOLTAGE SHALL BE 4885 VOLTS, DC.

4849 TEST VOLTAGE SHALL BE 4849 VOLTS, AC.

POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:

6311 BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.

6312 BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.

6292 BETWEEN MUTUALLY INSULATED PARTS.

6293 BETWEEN ALL INSULATED PARTS AND GROUND.

6294 BETWEEN CURRENT CARRYING PARTS AND THE CASE.

4859 SPECIAL PREPARATION SHALL BE IN ACCORDANCE WITH 4859.

4891 DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4891 SECOND(S).

6280 MOUNTING SHALL BE IN ACCORDANCE WITH 6280.

6308 REGULATION OF THE TEST VOLTAGE SHALL BE WITHIN 6308 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4900
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4902
(MILLIAMPERES)	6310
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4874
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4856
MAXIMUM LEAKAGE (SELECT ONE)	
(MILLIAMPERES)	4875
(MICROAMPERES)	4817
REMAIN WITHIN SPECIFIED TOLERANCE.	4847

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4900	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4900 KILOVOLTAMPERE(S).
4902	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4902 AMPERE(S).
6310	THE SURGE CURRENT SHALL BE NOT GREATER THAN 6310 MILLIAMPERE(S).
4874	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.
4856	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4875	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4875 MILLIAMPERE(S).
4817	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4817 MICROAMPERE(S).
4847	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4861
PER MIL-STD-202, METHOD 301.	4862
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4854
(VOLTS, AC)	4855
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	4842
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	4048
BETWEEN MUTUALLY INSULATED PARTS.	4844
BETWEEN ALL INSULATED PARTS AND GROUND.	4845
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	4846
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4850

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE | STANDARD PARAGRAPH

4861 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 48611.

4862 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.

4854 TEST VOLTAGE SHALL BE 4854 VOLTS, DC.

4855 TEST VOLTAGE SHALL BE 4855 VOLTS, AC.

POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:

4842 BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.

4848 BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.

4844 BETWEEN MUTUALLY INSULATED PARTS.

4845 BETWEEN ALL INSULATED PARTS AND GROUND.

4846 BETWEEN CURRENT CARRYING PARTS AND THE CASE.

4850 SPECIAL PREPARATION OR CONDITIONS SHALL BE IN ACCORDANCE WITH 4850.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
DURATION OF VOLTAGE APPLICATION (SECONDS)	4867
MOUNTING PER DOCUMENT (DOC DES)	5000
REGULATION OF TEST VOLTAGE (PERCENT)	4869
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4870
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	47117
(MILLIAMPERES)	4897
METHOD OF VOLTAGE CONNECTION PER DOCUMENT (DOC DES)	6267
DROPOUT VOLTAGE OR CURRENT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2180
AS FOLLOWS:	2182

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4867 DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4867 SECOND(S).

5000 MOUNTING SHALL BE IN ACCORDANCE WITH 5000.

4869 REGULATION OF TEST VOLTAGE SHALL BE WITHIN 4869 PERCENT.

4870 THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4870 KILOVOLTAMPERE(S).

4717 THE SURGE CURRENT SHALL BE NOT GREATER THAN 4717 AMPERE(S).

4897 THE SURGE CURRENT SHALL BE NOT GREATER THAN 4897 MILLIAMPERE(S).

6267 METHOD OF CONNECTION OF TEST VOLTAGE SHALL BE IN ACCORDANCE WITH 6267.

2180 DROPOUT VOLTAGE OR CURRENT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2180.

2182 DROPOUT VOLTAGE OR CURRENT. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DROPOUT VOLTAGE OR CURRENT (CONT)	
AS FOLLOWS: (CONT)	
MINIMUM DROPOUT VOLTAGE (SELECT ONE)	
(VOLTS, DC)	2183
(VOLTS, AC)	2184
MINIMUM DROPOUT CURRENT (SELECT ONE)	
(AMPERES)	2185
(MILLIAMPERES)	2186
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2190
PER DOCUMENT (DOC DES)	2192
ENERGIZING VOLTAGE (SELECT ONE)	
(PERCENT OF RATED)	2193
(VOLTS, AC)	2194
(VOLTS, DC)	2195
NUMBER OF TEST CYCLES (QUANTITY)	2196

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2183 THE DROPOUT VOLTAGE SHALL BE NOT LESS THAN 2183 VOLTS, DC.

21184 THE DROPOUT VOLTAGE SHALL BE NOT LESS THAN 2184 VOLTS, AC.

2185 THE DROPOUT CURRENT SHALL BE NOT LESS THAN 2185 AMPERE(S).

2186 THE DROPOUT CURRENT SHALL BE NOT LESS THAN 2186 MILLIAMPERE(S).

2190 DROPOUT VOLTAGE OR CURRENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2190.

2192 DROPOUT VOLTAGE OR CURRENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2192.

2193 THE ENERGIZING VOLTAGE SHALL BE 2193 PERCENT OF THE RATED VOLTAGE.

2194 THE ENERGIZING VOLTAGE SHALL BE 2194 VOLTS, AC.

2195 THE ENERGIZING VOLTAGE SHALL BE 2195 VOLTS, DC.

2196 THERE SHALL BE 2196 TEST CYCLES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELECTRICAL POWER DISSIPATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2220
AS FOLLOWS:	2222
MAXIMUM POWER DISSIPATION (SELECT ONE)	
(WATTS)	2223
(VOLT-AMPERES)	2224
MAXIMUM COIL POWER DISSIPATION (SELECT ONE)	
(WATTS)	2225
(VOLT-AMPERES)	2226
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2230
PER DOCUMENT (DOC DES)	2232
COIL TEST VOLTAGE (SELECT ONE)	
(PERCENT OF RATED)	2233
(VOLTS, DC)	2234
(VOLTS, AC)	2235

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2220 ELECTRICAL POWER DISSIPATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2220.

2222 ELECTRICAL POWER DISSIPATION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2223 THE POWER DISSIPATION SHALL BE NOT GREATER THAN 2223 WATT(S).

2224 THE POWER DISSIPATION SHALL BE NOT GREATER THAN 2224 VOLT-AMPERE(S).

2225 THE COIL POWER DISSIPATION SHALL BE NOT GREATER THAN 2225 WATT(S).

2226 THE COIL POWER DISSIPATION SHALL BE NOT GREATER THAN 2226 VOLT-AMPERE(S).

2230 ELECTRICAL POWER DISSIPATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2230.

2232 ELECTRICAL POWER DISSIPATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2232.

2233 THE COIL TEST VOLTAGE SHALL BE 2233 PERCENT OF THE RATED VOLTAGE.

2234 THE COIL TEST VOLTAGE SHALL BE 2234 VOLTS, DC.

2235 THE COIL TEST VOLTAGE SHALL BE 2235 VOLTS, AC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELECTRICAL POWER DISSIPATION (CONT)	
PER DOCUMENT (CONT)	
STABILIZATION TEMPERATURE (DEGREES CELSIUS)	2236
CONTACT LOAD (SELECT ONE)	
(PERCENT OF RATED)	2237
(AMPERES)	2238
(MILLIAMPERES)	2239
LOAD TYPE (TYPE)	2240
POWER MEASURING TIME AFTER ENERGIZING COIL (SELECT ONE)	
(MINUTES)	2241
(SECONDS)	2242
ELECTROMAGNETIC INTERFERENCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2250
PER MIL-STD-461 LIMITS.	2252
NO ELECTRICAL OR MECHANICAL MALFUNCTION.	2253

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2236 THE STABILIZATION TEMPERATURE SHALL BE 2236 DEGREES CELSIUS.

2237 THE CONTACT LOAD SHALL BE 2237 PERCENT OF THE RATED CONTACT LOAD.

2238 THE CONTACT LOAD SHALL BE 2238 AMPERE(S).

2239 THE CONTACT LOAD SHALL BE 2239 MILLIAMPERE(S).

2240 THE LOAD TYPE SHALL BE 2240.

2241 POWER SHALL BE MEASURED 2241 MINUTE(S) AFTER ENERGIZING THE COIL.

2242 POWER SHALL BE MEASURED 2242 SECOND(S) AFTER ENERGIZING THE COIL.

2250 ELECTROMAGNETIC INTERFERENCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2250.

2252 ELECTROMAGNETIC INTERFERENCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE LIMITS PER MIL-STD-461.

2253 THERE SHALL BE NO ELECTRICAL OR MECHANICAL MALFUNCTION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELECTROMAGNETIC INTERFERENCE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2260
PER MIL-STD-461, APPENDIX METHOD (DESIGNATION)	2262
PER MIL-STD-462.	2264
*TEST METHODS	
CE (NUMBER)	2265
RE (NUMBER)	2266
CS (NUMBER)	2267
RS (NUMBER)	2268
CRE (NUMBER)	2269
ENDURANCE, ELECTRICAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2270
AS FOLLOWS:	2272

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2260	ELECTROMAGNETIC INTERFERENCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2260.
2262	ELECTROMAGNETIC INTERFERENCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE MIL-STD-461 APPENDIX. METHOD 2262 SHALL APPLY.
2264	ELECTROMAGNETIC INTERFERENCE. TESTING SHALL, BE PERFORMED IN ACCORDANCE WITH MIL-STD-462. THE FOLLOWING METHOD(S) SHALL APPLY:
2265	METHOD CE 2265.
2266	METHOD RE 2266.
2267	METHOD CS 2267.
2268	METHOD RS 2268.
2269	METHOD CRE 2269.
2270	ENDURANCE, ELECTRICAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2270.
2272	ENDURANCE, ELECTRICAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE, ELECTRICAL (CONT)	
AS FOLLOWS: (CONT)	
NO PHASE TO PHASE ARCING.	2273
NO MECHANICAL OR ELECTRICAL FAILURE.	2274
NO WELDING OF CONTACTS.	2275
MAXIMUM TERMINAL TEMPERATURE RISE (DEGREES CELSIUS)	2276
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2277
NO BLOWING OF FUSE BETWEEN CASE AND LOAD SYSTEM GROUND OR NEUTRAL.	2278
NO EVIDENCE OF DAMAGE.	2279
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	2280
(MILLIOHMS)	2281
MAXIMUM CONTACT VOLTAGE DROP (SELECT ONE)	
(VOLTS)	2282
(MILLIVOLTS)	2283

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2273	THERE SHALL BE NO PHASE TO PHASE ARCING.
2274	THERE SHALL BE NO MECHANICAL OR ELECTRICAL FAILURE.
2275	THERE SHALL BE NO WELDING OF CONTACTS.
2276	THE TEMPERATURE RISE OF THE TERMINALS SHALL BE NOT GREATER THAN 2276 DEGREES CELSIUS.
2277	THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 2277 MEGOHM(S).
2278	THERE SHALL BE NO BLOWING OF THE FUSE BETWEEN THE CASE AND LOAD SYSTEM GROUND OR NEUTRAL.
2279	THERE SHALL BE NO EVIDENCE OF DAMAGE.
2280	CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2280 OHM(S).
2281	CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2281 MILLIOHM(S).
2282	CONTACT VOLTAGE DROP SHALL BE NOT GREATER THAN 2282 VOLT(S).
2283	CONTACT VOLTAGE DROP SHALL BE NOT GREATER THAN 2283 MILLIVOLT(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE, ELECTRICAL (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2290
PER DOCUMENT (DOC DES)	2292
TEST TEMPERATURE (DEGREES CELSIUS)	2293
TEST ALTITUDE (SELECT ONE)	
AS SPECIFIED HEREIN.	2294
(FEET)	2295
(METERS)	2296
MINIMUM NUMBER OF TEST CYCLES (QUANTITY)	2297
MINIMUM NUMBER OF TEST CYCLES AT EACH CONTACT LOAD RATING (QUANTITY)	2298
DUTY CYCLES	
INDUCTIVE LOAD	
"ON" (SECONDS)	2300
"OFF" (sECONDS)	2301
MOTOR LOAD	
"ON" (SECONDS)	2302
"OFF" (SECONDS)	2303

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2290	ENDURANCE, ELECTRICAL. TESTING SHALL BE PERFORMED ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2290.
2292	ENDURANCE, ELECTRICAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2292.
2293	THE TEST TEMPERATURE SHALL BE 2293 DEGREES CELSIUS.
2294	THE TEST ALTITUDE SHALL BE AS SPECIFIED HEREIN.
2295	THE TEST ALTITUDE SHALL BE 2295 FEET.
2296	THE TEST ALTITUDE SHALL BE 2296 METERS.
2297	THERE SHALL BE NOT LESS THAN 2297 TEST CYCLES.
2298	THERE SHALL BE NOT LESS THAN 2298 TEST CYCLES AT EACH CONTACT LOAD RATING.
	THE INDUCTIVE LOAD DUTY CYCLE SHALL BE AS FOLLOWS:
2300	'ON' 2300 SECONDS.
2301	'OFF' 2301 SECONDS.
	THE MOTOR LOAD DUTY CYCLE SHALL BE AS FOLLOWS:
2302	'ON' 2302 SECONDS.
2303	'OFF' 2303 SECONDS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE, ELECTRICAL (CONT)	
DUTY CYCLES (CONT)	
RESISTIVE LOAD	
"ON" (SECONDS)	2304
"OFF" (SECONDS)	2305
LAMP LOAD	
"ON" (SECONDS)	2306
"OFF" (SECONDS)	2307
TEST LOAD _____	2308
COIL TEST VOLTAGE (SELECT ONE)	
(PERCENT OF RATED)	2309
(VOLTS, AC)	2310
(VOLTS, DC)	2311
ENDURANCE, MECHANICAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2320
AS FOLLOWS:	2322

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	THE RESISTIVE LOAD DUTY CYCLE SHALL BE AS FOLLOWS:
2304	'ON' 2304 SECONDS.
2305	'OFF' 2305 SECONDS.
	THE LAMP LOAD DUTY CYCLE SHALL BE AS FOLLOWS:
2306	'ON' 2306 SECONDS.
2307	'OFF' 2307 SECONDS.
2308	THE TEST LOAD SHALL BE 2308.
2309	THE COIL TEST VOLTAGE SHALL BE 2309 PERCENT OF THE RATED COIL VOLTAGE.
2310	THE COIL TEST VOLTAGE SHALL BE 2310 VOLTS, AC.
2311	THE COIL TEST VOLTAGE SHALL BE 2311 VOLTS, DC.
2320	ENDURANCE, MECHANICAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2320.
2322	ENDURANCE, MECHANICAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE, MECHANICAL (CONT)	
AS FOLLOWS: (CONT)	
REMAIN MECHANICALLY AND ELECTRICALLY OPERATIVE.	2323
NO EVIDENCE OF MECHANICAL RESONANCE DUE TO FREQUENCY OF ENERGIZING VOLTAGE.	2324
EACH SET OF CONTACTS SHALL OPEN AND CLOSE ITS INDIVIDUAL CIRCUIT IN PROPER SEQUENCE.	2325
REMAIN WITHIN SPECIFIED TOLERANCES.	2326
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2330
PER DOCUMENT (DOC DES)	2332
TEST CYCLES (SELECT ONE)	
(QUANTITY)	2333
(TIMES SPECIFIED MINIMUM ELECTRICAL ENDURANCE CYCLES)	2334

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2323	THE ITEM(S) SHALL REMAIN MECHANICALLY AND ELECTRICALLY OPERATIVE.
2324	THERE SHALL BE NO EVIDENCE OF MECHANICAL RESONANCE DUE TO THE FREQUENCY OF THE ENERGIZING VOLTAGE.
2325	EACH SET OF CONTACTS SHALL OPEN AND CLOSE ITS INDIVIDUAL CIRCUIT IN PROPER SEQUENCE.
2326	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE(S).
2330	ENDURANCE, MECHANICAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2330.
2332	ENDURANCE, MECHANICAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2332.
2333	THERE SHALL BE 2333 TEST CYCLES.
2334	THE NUMBER OF TEST CYCLES SHALL BE 2334 TIMES THE SPECIFIED MINIMUM NUMBER OF ELECTRICAL ENDURANCE CYCLES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE, MECHANICAL (CONT)	
PER DOCUMENT (CONT)	
CONTACT LOAD VOLTAGE (SELECT ONE)	
(PERCENT OF SPECIFIED)	2335
(VOLTS, AC)	2336
(VOLTS, DC)	2337
CONTACT LOAD CURRENT (SELECT ONE)	
(PERCENT OF RATED)	2338
LOAD TYPE (TYPE)	2339
(AMPERES)	2340
COIL VOLTAGE (SELECT ONE)	
(PERCENT OF RATED)	2341
(VOLTS, AC)	2342
(VOLTS, DC)	2343
EXPLOSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2350

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2335	THE CONTACT LOAD VOLTAGE SHALL BE 2335 PERCENT OF THE SPECIFIED LOAD VOLTAGE.
2336	THE CONTACT LOAD VOLTAGE SHALL BE 2336 VOLTS, AC.
2337	THE CONTACT LOAD VOLTAGE SHALL BE 2337 VOLTS, DC.
2338	THE CONTACT LOAD CURRENT SHALL BE 2338 PERCENT OF THE RATED LOAD CURRENT.
2339	THE LOAD TYPE SHALL BE 2339.
2340	THE CONTACT LOAD CURRENT SHALL BE 2340 AMPERE(S).
2341	THE COIL VOLTAGE SHALL BE 2341 PERCENT OF THE RATED COIL VOLTAGE.
2342	THE COIL VOLTAGE SHALL BE 2342 VOLTS, AC.
2343	THE COIL VOLTAGE SHALL BE 2343 VOLTS, DC.
2350	EXPLOSION- THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2350.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
EXPLOSION (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	2352
ANY EXPLOSION INTERNAL TO RELAY SHALL NOT RUPTURE CASE OR IGNITE FUEL MIXTURE CHAMBER,	2353
REMAIN ELECTRICALLY AND MECHANICALLY OPERATIVE,	2354
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2360
PER MIL-STD-202, METHOD 109.	2362
LOAD (PERCENT OF RATED LOAD)	2363
LOAD (TYPE)	2364
CHAMBER TEMPERATURE (DEGREES CELSIUS)	2365
TEST VOLTAGE (SELECT ONE)	
(PERCENT OF RATED)	2366
(VOLTS AC)	2367
FREQUENCY (HERTZ)	2368
(VOLTS DC)	2369

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2352	EXPLOSION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2353	ANY EXPLOSION INTERNAL TO THE RELAY SHALL NOT RUPTURE THE CASE OR IGNITE THE EXTERNAL FUEL MIXTURE IN THE TEST CHAMBER.
2354	THE RELAY(S) SHALL BE MECHANICALLY AND ELECTRICALLY OPERATIVE AFTER TEST.
2360	EXPLOSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2360.
2362	EXPLOSION, TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-202, METHOD 109.
2363	THE LOAD SHALL BE 2363 PERCENT OF THE RATED LOAD.
2364	THE LOAD TYPE SHALL BE 23640
2365	THE CHAMBER TEMPERATURE SHALL BE 2365 DEGREES CELSIUS.
2366	THE TEST VOLTAGE SHALL BE 2366 PERCENT OF THE RATED VOLTAGE.
2367	THE TEST VOLTAGE SHALL BE 2367 VOLTS AC.
2368	THE AC VOLTAGE FREQUENCY SHALL BE 2368 HERTZ.
2369	THE TEST VOLTAGE SHALL BE 2369 VOLTS DC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
EXPLOSION (CONT)	
PER MIL-STD-202, METHOD 109. (CONT)	
NUMBER OF TESTS (QUANTITY)	2370
CHAMBER GAS MIXTURE ____	2371
EXPLOSIVE DECOMPRESSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2380
AS FOLLOWS:	2382
NO EVIDENCE OF DAMAGE.	2383
REMAIN WITHIN THE FOLLOWING SPECIFIED TOLERANCES:	
DIELECTRIC WITHSTANDING VOLTAGE.	2384
PICKUP VOLTAGE OR CURRENT.	2385
DROPOUT VOLTAGE OR CURRENT,	2386
OTHER ____	2387
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2390
PER DOCUMENT (DOC DES)	2392

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2370 THERE SHALL BE 2370 TEST(S).

2371 THE CHAMBER GAS MIXTURE SHALL BE 2371.

2380 EXPLOSIVE DECOMPRESSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2380.

2382 EXPLOSIVE DECOMPRESSION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2383 THERE SHALL BE NO EVIDENCE OF DAMAGE.

THE ITEM(S) SHALL REMAIN WITHIN THE FOLLOWING SPECIFIED TOLERANCES:

2384 DIELECTRIC WITHSTANDING VOLTAGE.

2385 PICKUP VOLTAGE OR CURRENT.

2386 DROPOUT VOLTAGE OR CURRENT.

2387 2387.

2390 EXPLOSIVE DECOMPRESSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 23900

2392 EXPLOSIVE DECOMPRESSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2392.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
EXPLOSIVE DECOMPRESSION (CONT)	
PER DOCUMENT (CONT)	
PRESSURE REDUCTION RANGE (SELECT ONE)	
FROM (POUNDS PER SQUARE INCH, ABSOLUTE)	2393
*TO (POUNDS PER SQUARE INCH, ABSOLUTE)	2394
FROM (PASCALS)	2395
*TO (PASCALS)	2396
MAXIMUM PRESSURE REDUCTION DURATION (SELECT ONE)	
(SECONDS)	2397
(MILLISECONDS)	2398
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4760
FUNGUS RESISTANT BY CERTIFICATION OR BY TEST.	4761

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2393 2394	PRESSURE REDUCTION SHALL BE FROM 2393 TO 2394 POUNDS PER SQUARE INCH, ABSOLUTE.
2395 2396	PRESSURE REDUCTION SHALL BE FROM 2395 TO 2396 Pascal
2397	PRESSURE REDUCTION SHALL TAKE PLACE IN NOT GREATER THAN 2397 SECOND(S).
2398	PRESSURE REDUCTION SHALL TAKE PLACE IN NOT GREATER THAN 2398 MILLISECOND(S).
4760	FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.
4761	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED, THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FUNGUS (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF FUNGUS GROWTH WHEN TESTED.	4762
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4754
PER MIL-STD-810, METHOD 508.	4755
TEST PERIOD (DAYS)	4756
HEATER OVERVOLTAGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2400
AS FOLLOWS:	2402
NO EVIDENCE OF DAMAGE,	2403

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4762	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4754	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 47540
4755	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.
4756	TEST PERIOD SHALL BE 4756 DAY(S).
2400	HEATER OVERVOLTAGE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2400.
2402	HEATER OVERVOLTAGE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2403	THERE SHALL BE NO EVIDENCE OF DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HEATER OVERVOLTAGE (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM INCREASE IN OPERATE TIME (SELECT ONE)	
(PERCENT)	2404
(SECONDS)	2405
(MILLISECONDS)	2406
REMAIN WITHIN SPECIFIED INSULATION RESISTANCE TOLERANCE.	2407
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2410
PER MIL-R-19648.	2412
TEST VOLTAGE (SELECT ONE)	
(PERCENT OF RATED)	2413
(VOLTS, AC)	2414
(VOLTS, DC)	2415

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2404	THE INCREASE IN OPERATE TIME SHALL BE NOT GREATER THAN 2404 PERCENT.
2405	THE INCREASE IN OPERATE TIME SHALL BE NOT GREATER THAN 2405 SECOND(S).
2406	THE INCREASE IN OPERATE TIME SHALL BE NOT GREATER THAN 2406 MILLISECOND(S).
2407	THE ITEM(S) SHALL REMAIN WITHIN THE SPECIFIED INSULATION RESISTANCE Tolerance
2410	HEATER Overvoltage TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2410.
2412	HEATER OVERVOLTAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-19648.
2413	THE TEST VOLTAGE SHALL BE 2413 PERCENT OF THE RATED VOLTAGE.
2414	THE TEST VOLTAGE SHALL BE 2414 VOLTS, AC.
2415	THE TEST VOLTAGE SHALL BE 2415 VOLTS, DC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HEATER OVERVOLTAGE (CONT)	
PER MIL-R-19648. (CONT)	
ENERGIZED DURATION (SELECT ONE)	
(HOURS)	2416
(MINUTES)	2417
HOLD VOLTAGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2420
AS FOLLOWS:	2422
REMAIN PULLED IN.	2433
MAINTAIN OPEN OR CLOSED CIRCUITS.	2424
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2430
PER MIL-R-22527.	2432
REDUCED VOLTAGE LEVEL (SELECT ONE)	
(PERCENT OF RATED VOLTAGE)	2433
(VOLTS, AC)	2434
(VOLTS, DC)	2435

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2416	THE ENERGIZED DURATION SHALL BE 2416 HOUR(S).
2417	THE ENERGIZED DURATION SHALL BE 2417 MINUTE(S),
2420	HOLD VOLTAGE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2420.
2422	HOLD VOLTAGE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2433	THE ITEM(S) SHALL REMAIN PULLED IN.
2424	THE ITEM(S) SHALL MAINTAIN THE OPEN OR CLOSED Circuit
2430	HOLD VOLTAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 24300
2432	HOLD VOLTAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-22527.
2433	THE REDUCED VOLTAGE LEVEL SHALL BE 2433 PERCENT OF THE RATED VOLTAGE.
2434	THE REDUCED VOLTAGE LEVEL SHALL BE 2434 VOLTS, AC.
2435	THE REDUCED VOLTAGE LEVEL SHALL BE 2435 VOLTS, DC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4798
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	4799
NO DEGRADATION OF PERFORMANCE.	4815
REMAIN WITHIN SPECIFIED TOLERANCE.	4791
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1477
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	4795
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	4805
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	4813
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	4803

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4798	HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.
4799	HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
4815	THERE SHALL BE NO DEGRADATION OF PERFORMANCE.
4791	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1477	THERE SHALL BE NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DIELECTRIC WITHSTANDING VOLTAGE IS PERFORMED.
4795	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4795 MEGHOM(S) AT HIGH HUMIDITY.
4805	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4805 MEGOHM(S) AFTER DRYING.
4813	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4813 MILLIAMPERE(S) AT HIGH HUMIDITY.
4803	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4803 MILLIAMPERE(S) AFTER DRYING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4788
PER MIL-STD-202, METHOD 103.	4853
*TEST CONDITION (LETTER)	4890
POLARIZING VOLTAGE (VOLTS, DC)	4793
DURATION OF POLARIZING VOLTAGE APPLICATION (HOURS)	4790
POINTS OF APPLICATION OF POLARIZING VOLTAGE:	
BETWEEN MUTUALLY INSULATED PARTS,	4969
BETWEEN ALL INSULATED PARTS AND GROUND.	4970
BETWEEN CURRENT CARRYING PARTS AND CASE.	4971
BETWEEN CURRENT CARRYING PARTS AND GROUND.	6202
OTHER ____	2440
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	6207
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	6206

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4788	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.
4853	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 103 OF MIL-STD-202.
4890	TEST CONDITION LETTER 4890 SHALL APPLY.
4793	MAGNITUDE OF THE POLARIZING VOLTAGE SHALL BE 4793 VOLTS, DC.
4790	DURATION OF APPLICATION OF VOLTAGE SHALL BE 4790 HOUR(S).
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
4969	BETWEEN MUTUALLY INSULATED PARTS.
4970	BETWEEN ALL INSULATED PARTS AND GROUND.
4971	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
6202	BETWEEN CURRENT CARRYING PARTS AND GROUND.
2440	2440.
6207	DIELECTRIC WITHSTANDING VOLTAGE TEST SHALL BE PERFORMED AT HIGH HUMIDITY.
6206	DIELECTRIC WITHSTANDING VOLTAGE TEST SHALL BE PERFORMED AFTER DRYING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMMERSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4819
NO EVIDENCE OF PHYSICAL DAMAGE.	4820
REMAIN WITHIN SPECIFIED TOLERANCE.	4822
MINIMUM INSULATION RESISTANCE (MEGOHMS)	4825
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4809
PER MIL-STD-202, METHOD 104.	4810
*TEST CONDITION (LETTER)	4811
MEASUREMENTS AFTER FINAL CYCLE (HOURS)	4812
TIME BEFORE MEASUREMENTS AFTER FINAL CYCLE (HOURS)	4814
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1380

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4819	IMMERSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4819.
4820	IMMERSION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4822	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4825	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 4825 MEGOHM(S).
4809	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4809.
4810	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 104 OF MIL-STD-202.
4811	TEST CONDITION LETTER 4811 SHALL APPLY.
4812	FINAL MEASUREMENT(S) SHALL BE MADE WITHIN 4812 HOUR(S) AFTER FINAL CYCLE.
4814	MEASUREMENTS SHALL BE NOT MADE UNTIL 4814 HOUR(S) AFTER THE FINAL CYCLE.
1380	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	6359
*MINIMUM INSULATION RESISTANCE (SELECT ONE)	
SINGLE TEST	
(MEGOHMS)	1386
MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	1384
*SECOND TEST (MEGOHMS)	1387
REMAIN WITHIN SPECIFIED TOLERANCE.	1388
NO EVIDENCE OF PHYSICAL DAMAGE.	1407
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1371
PER MIL-STD-202, METHOD 302.	1511
*CONDITION (SELECT ONE)	
TEST CONDITION (LETTER)	1378
TEST VOLTAGE (VOLTS, DC)	1373

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6359 INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

1386 INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 1386 MEGOHM(S).

1384 INSULATION RESISTANCE SHALL BE NOT LESS THAN 1384 MEGOHM(S) AT THE FIRST TEST TEMPERATURE.

1387 INSULATION RESISTANCE SHALL BE NOT LESS THAN 1387 MEGOHM(S) AT THE SECOND TEST TEMPERATURE.

1388 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

1407 THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

1371 INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.

1511 INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 302 OF MIL-STD-202.

1378 TEST CONDITION LETTER 1378 SHALL APPLY.

1373 TEST POTENTIAL SHALL BE 1373 VOLTS, DC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 302. (CONT)	
ELECTRIFICATION TIME (SECONDS)	1376
MAXIMUM MEASUREMENT ERROR AT REQUIRED VALUE (PERCENT)	1377
POINTS OF APPLICATION OF TEST VOLTAGE:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	1497
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	1498
BETWEEN MUTUALLY INSULATED PARTS.	1522
BETWEEN INSULATED PARTS AND GROUND.	1523
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	1524
OTHER ____	2442
SPECIAL PREPARATIONS OR CONDITIONS PER DOCUMENT (DOC DES)	1520
FIRST TEST TEMPERATURE (DEGREES CELSIUS)	1372
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	1381

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1376	ELECTRIFICATION DURATION SHALL BE 1376 SECOND(S).
1377	THE MEASUREMENT ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1377 PERCENT.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
1497	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
1498	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
1522	BETWEEN MUTUALLY INSULATED PARTS.
1523	BETWEEN ALL INSULATED PARTS AND GROUND.
1524	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
2442	2442.
1520	SPECIAL PREPARATIONS OR CONDITIONS SHALL BE IN ACCORDANCE WITH 1520.
1372	FIRST TEST TEMPERATURE SHALL BE 1372 DEGREES CELSIUS.
1381	SECOND TEST TEMPERATURE SHALL BE 1381 DEGREES CELSIUS,

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 302. (CONT)	
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1383
RELATIVE HUMIDITY (PERCENT)	2444
INTERMEDIATE CURRENT SWITCHING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2450
AS FOLLOWS:	2452
REMAIN WITHIN SPECIFIED TOLERANCES.	2453
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	2454
(MILLIOHMS)	2455
MAXIMUM CONTACT VOLTAGE DROP (SELECT ONE)	
(VOLTS)	2456
(MILLIVOLTS)	2457
MAXIMUM CONTACT BOUNCE (SELECT ONE)	
(MILLISECONDS)	2458
(MICROSECONDS)	2459

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1383	TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1383 DEGREES CELSIUS.
2444	TESTING SHALL BE PERFORMED AT 2444 PERCENT RELATIVE HUMIDITY.
2450	INTERMEDIATE CURRENT SWITCHING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2450.
2452	INTERMEDIATE CURRENT SWITCHING. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2453	THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE(S).
2454	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2454 OHM(S).
2455	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2455 MILLIOHM(S).
2456	THE VOLTAGE DROP ACROSS CLOSED CONTACTS SHALL BE NOT GREATER THAN 2456 VOLT(S).
2457	THE VOLTAGE DROP ACROSS CLOSED CONTACTS SHALL BE NOT GREATER THAN 2457 MILLIVOLT(S).
2458	THE CONTACT BOUNCE SHALL BE NOT GREATER THAN 2458 MILLISECOND(S).
2459	THE CONTACT BOUNCE SHALL BE NOT GREATER THAN 2459 MICROSECOND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INTERMEDIATE CURRENT SWITCHING (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2460
PER MIL-STD-202, METHOD 312.	2462
MINIMUM VOLTAGE ACROSS OPEN CONTACTS (SELECT ONE)	
PERCENT OF APPLIED LOAD VOLTAGE (PERCENT)	2463
(VOLTS, AC)	2464
(VOLTS, DC)	2465
NUMBER OF OPERATIONS (QUANTITY)	2466
CYCLING RATE (CYCLES PER MINUTE)	2467
PLUS CYCLING RATE TOLERANCE (CYCLES PER MINUTE)	2468
MINUS CYCLING RATE TOLERANCE (CYCLES PER MINUTE)	2469
CYCLE "ON" AND "OFF" DURATION	
"ON" (PERCENT OF CYCLE)	2470
"OFF" (PERCENT OF CYCLE)	2471

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2460	INTERMEDIATE CURRENT SWITCHING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2460.
2462	INTERMEDIATE CURRENT Switching TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 312 OF MIL-STD-202.
2463	THE VOLTAGE ACROSS THE OPEN CONTACTS SHALL BE NOT LESS THAN 2463 PERCENT OF THE APPLIED LOAD VOLTAGE.
2464	THE VOLTAGE ACROSS THE OPEN CONTACTS SHALL BE NOT LESS THAN 2464 VOLTS, AC.
2465	THE VOLTAGE ACROSS THE OPEN CONTACTS SHALL BE NOT LESS THAN 2465 VOLTS, DC.
2466	THERE SHALL BE 2466 OPERATIONS.
2467	THE CYCLING RATE SHALL BE 2467 CYCLE(S) PER MINUTE.
2468	THE PLUS CYCLING RATE TOLERANCE SHALL BE 2468 CYCLE(S) PER MINUTE.
2469	THE MINUS CYCLING RATE TOLERANCE SHALL BE 2469 CYCLE(S) PER MINUTE.
	THE CYCLE "ON" AND "OFF" DURATION(S) SHALL BE AS FOLLOWS:
2470	'ON' 2470 PERCENT OF THE CYCLE.
24711	'OFF' 2471 PERCENT OF THE CYCLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INTERMEDIATE CURRENT SWITCHING (CONT)	
PER MIL-STD-202, METHOD 312. (CONT)	
MONITORING OF CONTACTS FOR STICKING IS NOT APPLICABLE,	2472
FINAL HALF OF CYCLES ARE TO BE TESTED AT ROOM TEMPERATURE.	2473
MAXIMUM AMBIENT TEMPERATURE (DEGREES CELSIUS)	2474
COIL VOLTAGE (VOLTS)	2475
INTERNAL MOISTURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2480
AS FOLLOWS:	2482
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	2483
(MILLIOHMS)	2484
MINIMUM INSULATION RESISTANCE BETWEEN ALL CONTACTS AND CASE (MEGOHMS)	2485

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2472 MONITORING OF CONTACTS FOR STICKING IS NOT APPLICABLE.

2473 THE FINAL HALF OF THE CYCLES SHALL BE TESTED AT ROOM TEMPERATURE.

2474 THE AMBIENT TEMPERATURE SHALL BE NOT GREATER THAN 2474 DEGREES CELSIUS.

2475 THE COIL VOLTAGE SHALL BE 2475 VOLT(S).

2480 INTERNAL MOISTURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2480.

2482 INTERNAL MOISTURE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2483 CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2483 OHM(S).

2484 CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2484 MILLIOHM(S).

2485 THE INSULATION RESISTANCE BETWEEN ALL CONTACTS AND CASE SHALL BE NOT LESS THAN 2485 Megohms

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INTERNAL MOISTURE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2490
PER DOCUMENT (DOC DES)	2492
MAXIMUM TEST TEMPERATURE (DEGREES CELSIUS)	2493
DURATION AT MAXIMUM TEST TEMPERATURE (SELECT ONE)	
(MINUTES)	2494
(HOURS)	2495
MINIMUM TEST TEMPERATURE (DEGREES CELSIUS)	2496
DURATION AT MINIMUM TEST TEMPERATURE (SELECT ONE)	
(MINUTES)	2497
(HOURS)	2498

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2490	INTERNAL MOISTURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2490.
2492	INTERNAL MOISTURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2492.
2493	THE TEST TEMPERATURE SHALL BE NOT GREATER THAN 2493 DEGREES CELSIUS.
2494	THE DURATION AT THE MAXIMUM TEST TEMPERATURE SHALL BE 2494 MINUTE(S).
2495	THE DURATION AT THE MAXIMUM TEST TEMPERATURE SHALL BE 2495 HOUR(S).
2496	THE TEST TEMPERATURE SHALL BE NOT LESS THAN 2496 DEGREES CELSIUS.
2497	THE DURATION AT THE MINIMUM TEST TEMPERATURE SHALL BE 2497 MINUTE(S).
2498	THE DURATION AT THE MINIMUM TEST TEMPERATURE SHALL BE 2498 HOUR(S),

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INTERNAL MOISTURE (CONT)	
PER DOCUMENT (CONT)	
TEST VOLTAGE (SELECT ONE)	
(PERCENT OF RATED VOLTAGE)	2499
(VOLTS, DC)	2500
(VOLTS, AC)	2501
DURATION OF TEST VOLTAGE APPLICATION (MINUTES)	2502
LIFE, LOW LEVEL SWITCHING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2510
AS FOLLOWS:	2512
"MISSES" ALLOWED (QUANTITY)	2513
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	2514
(MILLIOHMS)	2515

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2499 THE TEST VOLTAGE SHALL BE 2499 PERCENT OF THE RATED VOLTAGE.

2500 THE TEST VOLTAGE SHALL BE 2500 VOLTS, DC.

2501 THE TEST VOLTAGE SHALL BE 2501 VOLTS, AC.

2502 THE DURATION OF TEST VOLTAGE APPLICATION SHALL BE 2502 MINUTE(S).

2510 LIFE, LOW LEVEL SWITCHING THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2510.

2512 LIFE, LOW LEVEL SWITCHING. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2513 THERE SHALL BE 2513 'MISS(S)' ALLOWED.

2514 THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2514 OHM(S).

2515 THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2515 MILLIOHM(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LIFE, LOW LEVEL SWITCHING (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM CONTACT VOLTAGE DROP (SELECT ONE)	
(VOLTS)	2516
(MILLIVOLTS)	2517
REMAIN WITHIN SPECIFIED TOLERANCES.	2518
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2520
PER MIL-STD-202, METHOD 311.	2522
MAXIMUM LOAD CURRENT (SELECT ONE)	
(AMPERES)	2523
(MILLIAMPERES)	2524
MAXIMUM LOAD VOLTAGE (SELECT ONE)	
(VOLTS, DC)	2525
(MILLIVOLTS, DC)	2526
(VOLTS, AC)	2527
(MILLIVOLTS, AC)	2528

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2516	THE CLOSED CONTACTS VOLTAGE DROP SHALL BE NOT GREATER THAN 2516 VOLT(S).
2517	THE CLOSED CONTACTS VOLTAGE DROP SHALL BE NOT GREATER THAN 2517 MILLIVOLT(S).
2518	THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE(S).
2520	LIFE, LOW LEVEL SWITCHING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2520.
2522	LIFE, LOW LEVEL SWITCHING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 311 OF MIL-STD-202.
2523	THE LOAD CURRENT SHALL BE NOT GREATER THAN 2523 AMPERE(S).
2524	THE LOAD CURRENT SHALL BE NOT GREATER THAN 2524 MILLIAMPERE(S).
2525	THE LOAD VOLTAGE SHALL BE NOT GREATER THAN 2525 VOLT(S), DC.
2526	THE LOAD VOLTAGE SHALL BE NOT GREATER THAN 2526 MILLIVOLTS, DC.
2527	THE LOAD VOLTAGE SHALL BE NOT GREATER THAN 2527 VOLT(S), AC.
2528	THE LOAD VOLTAGE SHALL BE NOT GREATER THAN 2528 MILLIVOLTS, AC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LIFE, LOW LEVEL SWITCHING (CONT)	
PER MIL-STD-202, METHOD 311. (CONT)	
CONTACTS SHALL BE MONITORED FOR STICKING.	2529
TEST CYCLES (QUANTITY)	2530
TEST CYCLE RATE (CYCLES PER MINUTE)	2531
PLUS CYCLE RATE TOLERANCE (CYCLES PER MINUTE)	2532
MINUS CYCLE RATE TOLERANCE (CYCLES PER MINUTE)	2533
LOAD TRANSFER	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2540
AS FOLLOWS:	2542
NO PHASE TO PHASE ARCING.	2543
NO WELDING OR STICKING OF CONTACTS.	2544
CASE TO GROUND FUSE SHALL NOT "BLOW".	2545
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	2546
(MILLIOHMS)	2547

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2529	CONTACTS SHALL BE MONITORED FOR STICKING.
2530	THERE SHALL BE 2530 TEST CYCLES.
2531	THE TEST CYCLE RATE SHALL BE 2531 CYCLES PER MINUTE.
2532	THE PLUS CYCLE RATE TOLERANCE SHALL BE 2532 CYCLES PER MINUTE.
2533	THE MINUS CYCLE RATE TOLERANCE SHALL BE 2533 CYCLES PER MINUTE.
2540	LOAD TRANSFER. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2540.
2542	LOAD TRANSFER, THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2543	THERE SHALL BE NO PHASE TO PHASE ARCING.
2544	THERE SHALL BE NO WELDING OR STICKING OF CONTACTS.
2545	THE CASE TO GROUND FUSE SHALL NOT "BLOW".
2546	CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2546 OHM(S).
2547	CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2547 MILLIOHM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LOAD TRANSFER (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM CONTACT VOLTAGE DROP (SELECT ONE)	
(VOLTS)	2548
(MILLIVOLTS)	2549
REMAIN WITHIN SPECIFIED DIELECTRIC WITHSTANDING VOLTAGE TOLERANCES.	2550
INSULATION RESISTANCE (SELECT ONE)	
NO CHANGE.	2551
MINIMUM (MEGOHMS)	2552
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2560
PER DOCUMENT (DOC DES)	2562
TEST CYCLES (QUANTITY)	2563
OPERATING CYCLE	
"ON" (SECONDS)	2564
"OFF" (SECONDS)	2565

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2548	CONTACT VOLTAGE DROP SHALL BE NOT GREATER THAN 2548 VOLT(S).
2549	CONTACT VOLTAGE DROP SHALL BE NOT GREATER THAN 2549 MILLIVOLT(S).
2550	THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED DIELECTRIC WITHSTANDING VOLTAGE TOLERANCE(S).
2551	THERE SHALL BE NO CHANGE IN INSULATION RESISTANCE.
2552	INSULATION RESISTANCE SHALL BE NOT LESS THAN 2552 MEGOHM(S).
2560	LOAD TRANSFER. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2560.
2562	LOAD TRANSFER. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2562.
2563	THERE SHALL BE 2563 TEST CYCLES.
	THE OPERATING CYCLE SHALL BE AS FOLLOWS:
2564	'ON' 2564 SECOND(S).
2565	'OFF' 2565 SECOND(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LOAD TRANSFER (CONT)	
PER DOCUMENT (CONT)	
FUSE RATING (SELECT ONE)	
(PERCENT OF RATED LOAD)	2566
(AMPERES)	2567
(MILLIAMPERES)	2568
TEST LOAD VOLTAGE (SELECT ONE)	
(PERCENT OF RATED LOAD VOLTAGE)	2569
(VOLTS, AC)	2570
TEST LOAD CURRENT (SELECT ONE)	
(PERCENT OF RATED LOAD CURRENT)	2571
(AMPERES)	2572
(MILLIAMPERES)	2573
MAGNETIC INTERFERENCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2580
AS FOLLOWS:	2581

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2566 THE FUSE RATING SHALL BE 2566 PERCENT OF THE RATED LOAD.

2567 THE FUSE RATING SHALL BE 2567 AMPERE(S).

2568 THE FUSE RATING SHALL BE 2568 MILLIAMPERE(S).

2569 THE TEST LOAD VOLTAGE SHALL BE 2569 PERCENT OF THE RATED LOAD VOLTAGE.

2570 THE TEST LOAD VOLTAGE SHALL BE 2570 VOLTS, AC.

2571 THE TEST LOAD CURRENT SHALL BE 2571 PERCENT OF THE RATED LOAD CURRENT.

2572 THE TEST LOAD CURRENT SHALL BE 2572 AMPERE(S).

2573 THE TEST LOAD CURRENT SHALL BE 2573 Milliampere

2580 MAGNETIC INTERFERENCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2580.

2581 MAGNETIC INTERFERENCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAGNETIC INTERFERENCE (CONT)	
AS FOLLOWS: (CONT)	
REMAIN WITHIN THE FOLLOWING SPECIFIED TOLERANCES:	
PICKUP VOLTAGE OR CURRENT.	2582
DROPOUT VOLTAGE OR CURRENT.	2583
OPERATE AND RELEASE TIME.	2584
OTHER _____	2585
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2590
PER DOCUMENT (DOC DES)	2592
MECHANICAL INTERLOCK	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2600
IMPOSSIBLE TO CLOSE ONE SET OF CONTACTS WHENEVER THE OTHER SET IS MAINTAINED CLOSED.	2602
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2610

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	THE ITEM(S) SHALL REMAIN WITHIN THE FOLLOWING SPECIFIED TOLERANCES:
2582	PICKUP VOLTAGE OR CURRENT.
2583	DROPOUT VOLTAGE OR CURRENT.
2584	OPERATE AND RELEASE TIME.
2585	2585.
2590	MAGNETIC INTERFERENCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2590.
2592	MAGNETIC INTERFERENCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2592.
2600	MECHANICAL INTERLOCK. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2600.
2602	MECHANICAL INTERLOCK. IT SHALL BE IMPOSSIBLE TO CLOSE ONE SET OF CONTACTS WHENEVER THE OTHER SET IS MAINTAINED IN THE CLOSED POSITION.
2610	MECHANICAL INTERLOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2610.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MECHANICAL INTERLOCK (CONT)	
TEST METHODS (CONT)	
PER MIL-R-6106.	2612
NUMBER OF TEST CYCLES (QUANTITY)	2613
OPERATING CYCLE	
"ON" (SECONDS)	2614
"OFF" (SECONDS)	2615
MOISTURE RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1400
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	1396
REMAIN WITHIN SPECIFIED TOLERANCE.	1398
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1394
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	1429
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	1404

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2612 MECHANICAL INTERLOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-6106.

2613 THERE SHALL BE 2613 TEST CYCLES.

THE OPERATING CYCLE SHALL BE AS FOLLOWS:

2614 'ON' 2614 SECOND(S).

2615 'OFF' 2615 SECOND(S).

1400 MOISTURE RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1400.

1396 MOISTURE RESISTANCE. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.

1398 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

1394 THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING OR INSULATION BREAKDOWN, WHEN DIELECTRIC WITHSTANDING VOLTAGE IS APPLIED,

1429 CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1429 MILLIAMPERE(S) AT HIGH HUMIDITY.

1404 DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1404 MILLIAMPERE(S) AFTER DRYING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE (CONT)	
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE. (CONT)	
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	1432
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	1406
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	2620
(MILLIOHMS)	2622
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1391
PER MIL-STD-202, METHOD 106.	1397
POLARIZING VOLTAGE (VOLTS, DC)	1395
LOADING VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4981
(VOLTS, AC)	4980
PERCENT OF SAMPLE SUBJECTED TO POLARIZING VOLTAGE (PERCENT)	4991

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1432	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1432 MEGOHM(S) AT HIGH HUMIDITY.
1406	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1406 MEGOHM(S) AFTER DRYING.
2620	CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2620 OHM(S),
2622	CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2622 MILLIOHM(S).
1391	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1391.
1397	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 106 OF MIL-STD-202.
1395	POLARIZING VOLTAGE SHALL BE 11395 VOLTS, DC.
4981	LOADING VOLTAGE SHALL BE 4981 VOLTS, DC.
4980	LOADING VOLTAGE SHALL BE 4980 VOLTS, AC.
4991	4991 PERCENT OF THE SAMPLE SHALL BE SUBJECTED TO THE POLARIZING VOLTAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 106. (CONT)	
STEP 7A NOT APPLICABLE.	4985
STEP 7B NOT APPLICABLE.	4986
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	4983
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	4984
MOUNTING (SELECT ONE)	
MOUNT PER DOCUMENT (DOC DES)	1449
MOUNT ON CORROSION RESISTANT PANEL BY NORMAL MOUNTING MEANS.	2626
MOUNTING SHALL BE _____	2624
OPERATE AND RELEASE TIME	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2630
AS FOLLOWS:	2632

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4985	STEP 7A OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
4986	STEP 7B OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
4983	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.
4984	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.
1449	MOUNTING SHALL BE IN ACCORDANCE WITH 1449.
2626	MOUNTING-SHALL BE ON A CORROSION RESISTANT PANEL BY NORMAL MOUNTING MEANS.
2624	MOUNTING SHALL BE 2624.
2630	OPERATE AND RELEASE TIME. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 26300
2632	OPERATE AND RELEASE TIME. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME

OPERATE AND RELEASE TIME (CONT)

AS FOLLOWS: (CONT)

MAXIMUM OPERATE AND RELEASE TIME (SELECT ONE)

(MILLISECONDS)

(MICROSECONDS)

(SECONDS)

INCLUSION OF CONTACT BOUNCE IN SPECIFIED TIME (SELECT ONE)

INCLUDING CONTACT BOUNCE.

NOT INCLUDING CONTACT BOUNCE.

MAXIMUM OPERATE TIME (SELECT ONE)

(MILLISECONDS)

(MICROSECONDS)

(SECONDS)

INCLUSION OF CONTACT BOUNCE IN SPECIFIED TIME (SELECT ONE)

INCLUDING CONTACT BOUNCE.

NOT INCLUDING CONTACT BOUNCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2634	THE OPERATE AND RELEASE TIME SHALL BE NOT GREATER THAN 2634 MILLISECOND(S).
2635	THE OPERATE AND RELEASE TIME SHALL BE NOT GREATER THAN 2635 MICROSECOND(S).
2633	THE OPERATE AND RELEASE TIME SHALL BE NOT GREATER THAN 2633 SECOND(S).
2636	THE OPERATE AND RELEASE TIME SHALL INCLUDE CONTACT BOUNCE.
2637	THE OPERATE AND RELEASE TIME SHALL NOT INCLUDE CONTACT BOUNCE.
2639	THE OPERATE TIME SHALL BE NOT GREATER THAN 2639 MILLISECOND(S).
2640	THE OPERATE TIME SHALL BE NOT GREATER THAN 2640 MICROSECOND(S).
2638	THE OPERATE TIME SHALL BE NOT GREATER THAN 2638 SECOND(S).
2641	THE OPERATE TIME SHALL INCLUDE CONTACT BOUNCE.
2642	THE OPERATE TIME SHALL NOT INCLUDE CONTACT BOUNCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OPERATE AND RELEASE TIME (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM RELEASE TIME (SELECT ONE)	
(MILLISECONDS)	2644
(MICROSECONDS)	2645
(SECONDS)	2643
INCLUSION OF CONTACT BOUNCE IN SPECIFIED TIME (SELECT ONE)	
INCLUDING CONTACT BOUNCE.	2646
NOT INCLUDING CONTACT BOUNCE.	2647
TIME DELAY OPERATE TIME (SELECT ONE)	
(SECONDS)	2648
(MINUTES)	2649
TIME DELAY RELEASE TIME (SELECT ONE)	
(SECONDS)	2650
(MINUTES)	2651

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2644	THE RELEASE TIME SHALL BE NOT GREATER THAN 2644 MILLISECOND(S).
2645	THE RELEASE TIME SHALL BE NOT GREATER THAN 2645 MICROSECOND(S).
2643	THE RELEASE TIME SHALL BE NOT GREATER THAN 2643 SECOND(S).
2646	THE RELEASE TIME SHALL INCLUDE CONTACT BOUNCE.
2647	THE RELEASE TIME SHALL NOT INCLUDE CONTACT BOUNCE.
2648	THE TIME DELAY OPERATE TIME SHALL BE 2648 SECOND(S).
2649	THE TIME DELAY OPERATE TIME SHALL BE 2649 MINUTE(S).
2650	THE TIME DELAY RELEASE TIME SHALL BE 2650 SECOND(S).
2651	THE TIME DELAY RELEASE TIME SHALL BE 2651 MINUTE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OPERATE AND RELEASE TIME (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2660
PER DOCUMENT (DOC DES)	2661
TEST VOLTAGE (SELECT ONE)	
(PERCENT OF RATED)	2664
(VOLTS, DC)	2663
(VOLTS, AC)	2662
TEST CURRENT (SELECT ONE)	
(AMPERES)	2665
(MILLIAMPERES)	2666
OVERLOAD	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2670
AS FOLLOWS:	2672

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2660	OPERATE AND RELEASE TIME. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2660.
2661	OPERATE AND RELEASE TIME. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2661.
2664	THE TEST VOLTAGE SHALL BE 2664 PERCENT OF THE RATED VOLTAGE.
2663	THE TEST VOLTAGE SHALL BE 2663 VOLTS, DC.
2662	THE TEST VOLTAGE SHALL BE 2662 VOLTS, AC.
2665	THE TEST CURRENT SHALL BE 2665 AMPERE(S).
2666	THE TEST CURRENT SHALL BE 2666 MILLIAMPERE(S).
2670	OVERLOAD. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2670.
2672	OVERLOAD. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OVERLOAD (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	2673
(MILLIOHMS)	2674
MAXIMUM VOLTAGE DROP ACROSS CLOSED CONTACTS (SELECT ONE)	
(VOLTS)	2675
(MILLIVOLTS)	2676
PERCENT OF APPLIED LOAD VOLTAGE (PERCENT)	2677
MINIMUM VOLTAGE ACROSS OPEN CONTACTS	
(PERCENT OF APPLIED LOAD VOLTAGE)	2678
REMAIN MECHANICALLY AND ELECTRICALLY OPERATIVE.	2679
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2680

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2673	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2673 OHM(S).
2674	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2674 MILLIOHM(S).
2675	THE VOLTAGE DROP ACROSS CLOSED CONTACTS SHALL BE NOT GREATER THAN 2675 VOLT(S).
2676	THE VOLTAGE DROP ACROSS CLOSED CONTACTS SHALL BE NOT GREATER THAN 2676 MILLIVOLT(S).
2677	THE VOLTAGE DROP ACROSS CLOSED CONTACTS SHALL BE NOT GREATER THAN 2677 PERCENT OF THE APPLIED LOAD VOLTAGE.
2678	THE VOLTAGE ACROSS THE OPEN CONTACTS SHALL BE NOT LESS THAN 2678 PERCENT OF THE APPLIED LOAD VOLTAGE.
2679	THE ITEM(S) SHALL REMAIN MECHANICALLY AND ELECTRICALLY OPERATIVE.
2680	OVERLOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2680.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OVERLOAD (CONT)	
TEST METHODS (CONT)	
PER DOCUMENT (DOC DES)	2682
NUMBER OF OPERATIONS (QUANTITY)	2683
OVERLOAD CURRENT (SELECT ONE)	
(AMPERES)	2684
(PERCENT OF RATED LOAD)	2685
CYCLING RATE (CYCLES PER MINUTE)	2686
PLUS CYCLING RATE TOLERANCE (CYCLES PER MINUTE)	2687
MINUS CYCLING RATE TOLERANCE (CYCLES PER MINUTE)	2688
DUTY CYCLE	
"ON" (PERCENT)	2689
"OFF" (PERCENT)	2690
OZONE RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2700

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2682 OVERLOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2682.

2683 THERE SHALL BE 2683 OPERATIONS.

2684 THE OVERLOAD CURRENT SHALL BE 2684 AMPERE(S).

2685 THE OVERLOAD CURRENT SHALL BE 2685 PERCENT OF THE RATED LOAD.

2686 THE CYCLING RATE SHALL BE 2686 CYCLES PER MINUTE,

2687 THE PLUS CYCLING RATE TOLERANCE SHALL BE 2687 CYCLES PER MINUTE.

2688 THE MINUS CYCLING RATE TOLERANCE SHALL BE 2688 CYCLES PER MINUTE.

THE DUTY CYCLE SHALL BE AS FOLLOWS:

2689 'ON' 2689 PERCENT OF CYCLE.

2690 'OFF' 2690 PERCENT OF CYCLE.

2700 OZONE RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2700.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OZONE RESISTANCE (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	2702
NO CRACKING OF MATERIALS.	2703
REMAIN WITHIN SPECIFIED TOLERANCES.	2704
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2710
PER MIL-R-6106.	2712
DURATION SUBJECTED TO OZONE CONCENTRATION (HOURS)	2713
OZONE CONCENTRATION (PERCENT BY VOLUME)	2714
PICKUP VOLTAGE OR CURRENT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2720
PER COIL CHARACTERISTICS TABLE.	2722
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2730

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2702 OZONE RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2703 THERE SHALL BE NO CRACKING OF MATERIALS.

2704 THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE(S).

2710 OZONE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2710.

2712 OZONE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-6106.

2713 THE ITEM(S) SHALL BE SUBJECTED TO THE OZONE CONCENTRATION FOR 2713 HOUR(S).

2714 THE OZONE CONCENTRATION SHALL BE 2714 PERCENT BY VOLUME.

2720 PICKUP VOLTAGE OR CURRENT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2720.

2722 PICKUP VOLTAGE OR CURRENT. THE PICKUP VOLTAGE OR CURRENT SHALL BE IN ACCORDANCE WITH THE COIL CHARACTERISTICS TABLE.

2730 PICKUP VOLTAGE OR CURRENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2730.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PICKUP VOLTAGE OR CURRENT (CONT)	
TEST METHODS (CONT)	
PER DOCUMENT (DOC DES)	2732
TEST VOLTAGE (SELECT ONE)	
(PERCENT OF RATED)	2737
(VOLTS, AC)	2734
(VOLTS, DC)	2736
TEST CURRENT (SELECT ONE)	
(AMPERES)	2738
(MILLIAMPERES)	2739
RADIOGRAPHIC	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6291

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2732	PICKUP VOLTAGE OR CURRENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2732.
2737	THE TEST VOLTAGE SHALL BE 2737 PERCENT OF THE RATED VOLTAGE.
2734	THE TEST VOLTAGE SHALL BE 2734 VOLTS, AC.
2736	THE TEST VOLTAGE SHALL BE 2736 VOLTS, DC.
2738	THE TEST CURRENT SHALL BE 2738 AMPERE(S).
2739	THE TEST CURRENT SHALL BE 2739 MILLIAMPERE(S).
6291	RADIOGRAPHIC. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6291.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RADIOGRAPHIC (CONT)	
REQUIREMENTS (CONT)	
NO INHOMOGENEITIES, FOREIGN PARTICLES, INCORRECT ALIGNMENT, DEFECTS.	6371
*DISPOSITION OF NEGATIVES OR RECORDS (SELECT ONE)	
DELIVERED.	4857
NOT DELIVERED.	4858
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6282
PER MIL-STD-202, METHOD 209.	4843
SOURCE-OBJECT DISTANCE (SELECT ONE)	
(METERS)	6286
(INCHES)	6285

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6371	RADIOGRAPHIC. THE EXAMINATION OF THE RADIOGRAPHS OF THE ITEMS SHALL SHOW: NO INHOMOGENEITIES, NO FOREIGN PARTICLES WITHIN THE ENCLOSURE, ALL PARTS CORRECTLY ALIGNED WITH EACH OTHER, NO DEFECTIVE WORKMANSHIP DETAILS, OR ANY OTHER DEFECTS SPECIFIED HEREIN. MANUFACTURERS SHALL PROVIDE A MEANS OF IDENTIFYING ITEMS ON THE NEGATIVES (OR NONFILM RECORDS, IF APPLICABLE).
4857	NEGATIVES (OR NONFILM RECORDS, IF APPLICABLE) SHALL BE DELIVERED WITH EACH SHIPMENT OF ITEMS.
4858	NEGATIVES (OR NONFILM RECORDS, IF APPLICABLE) SHALL BE MADE AVAILABLE FOR EXAMINATION UPON REQUEST.
6282	RADIOGRAPHIC. RADIOGRAPHIC INSPECTION SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6282.
4843	RADIOGRAPHIC. RADIOGRAPHIC INSPECTION SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 209 OF MIL-STD-202.
6286	THE SOURCE-OBJECT DISTANCE (THE DISTANCE FROM THE FOCAL SPOT OF THE X-RAY TUBE TO THE OBJECT BEING RADIOGRAPHED) SHALL BE 6286 METER(S).
6285	THE SOURCE-OBJECT DISTANCE (THE DISTANCE FROM THE FOCAL SPOT OF THE X-RAY TUBE TO THE OBJECT BEING RADIOGRAPHED) SHALL BE 6285 INCH(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RADIOGRAPHIC (CONT)	
PER MIL-STD-202, METHOD 209. (CONT)	
VIEWING EQUIPMENT (IDENTIFY) _____	6287
MAGNIFICATION (X-POWER)	6288
DEFECTS SOUGHT (IDENTIFY) _____	6289
NONFILM TECHNIQUES ALLOWED.	6284
PENETRAMETER WIRE SIZE (SELECT ONE)	
(AWG)	6283
(MILLIMETERS)	5297
POSITIONING OF SPECIMENS _____	5031
RADIOGRAPHED UNITS IDENTIFIED BY SUITABLE MARKING.	5032
RECYCLE TIME (RECOVERY)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2740

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6287 THE VIEWING EQUIPMENT SHALL BE 6287.

6288 THE IMAGES SHALL BE VIEWED AT 6288 X-POWER MAGNIFICATION.

6289 THE DEFECTS TO BE SOUGHT SHALL BE 6289.

6284 NONFILM TECHNIQUES MAY BE USED, IF DESIRED. RECORDS SHALL BE MAINTAINED? FOR EXAMINATION OR DELIVERY, AS SPECIFIED.

6283 TO FURTHER INSURE ADEQUATE QUALITY, A RADIOGRAPH OF THE PENETRAMETER SHALL BE INCLUDED ON EACH RADIOGRAPHIC FILM. THE PENETRAMETER SHALL BE MADE FROM A SAMPLE ITEM OF THE SAME TYPE AS THE ITEM BEING INSPECTED (RADIOGRAPHED). THE PENETRAMETER SHOULD UTILIZE AN AWG SIZE 6283 COPPER WIRE ON THE SIDE OF THE ITEM FARTHEST FROM THE X-RAY FILM.

5297 TO FURTHER INSURE ADEQUATE QUALITY, A RADIOGRAPH OF THE PENETRAMETER SHALL BE INCLUDED ON EACH RADIOGRAPHIC FILM. THE PENETRAMETER SHALL BE MADE FROM A SAMPLE ITEM OF THE SAME TYPE AS THE ITEM BEING INSPECTED (RADIOGRAPHED). THE PENETRAMETER SHOULD UTILIZE A 5297 MILLIMETER(S) DIAMETER COPPER WIRE ON THE SIDE OF THE ITEM FARTHEST FROM THE X-RAY FILM.

5031 THE POSITIONING OF THE SPECIMENS SHALL BE 5031.

5032 RADIOGRAPHED UNITS SHALL BE IDENTIFIED BY SUITABLE MARKING.

2740 RECYCLE TIME (RECOVERY). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2740.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RECYCLE TIME (RECOVERY) (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	2742
INSTANT RECOVERY TIME (SELECT ONE)	
(SECONDS)	2743
(MINUTES)	2744
SATURATE RECOVERY TIME (SELECT ONE)	
(SECONDS)	2745
(MINUTES)	2746
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2750
PER DOCUMENT (DOC DES)	2752
TEST FOR INSTANT RECOVERY TIME.	2753
TEST FOR SATURATE RECOVERY TIME.	2754
HEATER EXCITATION DURATION (SELECT ONE)	
(TIMES NORMAL OPERATE TIME)	2755
(SECONDS)	2756
(MINUTES)	2757

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2742 RECYCLE TIME (RECOVERY). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2743 THE INSTANT RECOVERY TIME SHALL BE 2743 SECOND(S).

2744 THE INSTANT RECOVERY TIME SHALL BE 2744 MINUTE(S).

2745 THE SATURATE RECOVERY TIME SHALL BE 2745 SECOND(S).

2746 THE SATURATE RECOVERY TIME SHALL BE 2746 MINUTE(S).

2750 RECYCLE TIME (RECOVERY). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2750.

2752 RECYCLE TIME (RECOVERY). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2752.

2753 TESTING SHALL BE PERFORMED FOR INSTANT RECOVERY TIME.

2754 TESTING SHALL BE PERFORMED FOR SATURATE RECOVERY TIME.

2755 THE HEATER EXCITATION DURATION SHALL BE 2755 TIMES NORMAL OPERATE TIME.

2756 THE HEATER EXCITATION DURATION SHALL BE 2756 SECOND(S).

2757 THE HEATER EXCITATION DURATION SHALL BE 2757 MINUTE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RELIABILITY SCREENING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6929
NO EVIDENCE OF PHYSICAL DAMAGE.	6930
REMAIN WITHIN SPECIFIED TOLERANCE.	6937
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	3900
(MILLIOHMS)	3901
MAXIMUM VOLTAGE DROP (SELECT ONE)	
(VOLTS)	3902
(MILLIVOLTS)	3903
(PERCENT OF LOAD VOLTAGE)	3904
MINIMUM INSULATION RESISTANCE (MEGOHMS)	3905

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6929	RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6929.
6930	RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6937	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
3900	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 3900 OHM(S).
3901	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 3901 MILLIOHM(S).
3902	THE CONTACT VOLTAGE DROP SHALL BE NOT GREATER THAN 3902 VOLT(S).
3903	THE CONTACT VOLTAGE DROP SHALL BE NOT GREATER THAN 3903 MILLIVOLT(S).
3904	THE CONTACT VOLTAGE DROP SHALL BE NOT GREATER THAN 3904 PERCENT OF THE LOAD VOLTAGE.
3905	THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 3905 MEGOHM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RELIABILITY SCREENING (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	6696
PER MIL-STD-202, METHOD 108.	6697
*DURATION (SELECT ONE)	
TEST CONDITION (LETTER)	6698
(HOURS)	6699
*DUTY CYCLE (SELECT ONE)	
1.5 HOURS ON AND 0.5 HOUR OFF.	6710
STEADY STATE.	6713
*TEST TEMPERATURE (DEGREES CELSIUS)	6700
*TOLERANCE (DEGREES CELSIUS)	6701
STILL AIR REQUIRED.	6923
POWER APPLIED TIMES RATED POWER (NUMBER)	6921
MAXIMUM VOLTAGE (VOLTS)	6939
TEST POTENTIAL (SELECT ONE)	
(VOLTS, AC)	6706
(VOLTS, DC)	6707

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6696 RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION? LOAD LIFE, OVERLOAD). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6696.

6697 RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING? STABILIZATION, LOAD LIFE, OVERLOAD). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 108 OF MIL-STD-202.

6698 TEST CONDITION LETTER 6698 SHALL APPLY.

6699 DURATION OF THE TEST SHALL BE 6699 HOUR(S).

6710 DUTY CYCLE SHALL BE ONE AND ONE-HALF HOURS ON AND ONE-HALF HOUR OFF.

6713 DUTY CYCLE SHALL BE STEADY STATE.

6700 TEST TEMPERATURE SHALL BE 6700 DEGREES CELSIUS.

6701 TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 67011 DEGREES CELSIUS.

6923 TEST CHAMBER SHALL HAVE STILL AIR.

6921 ITEM(S) SHALL BE TESTED AT 6921 TIMES THE RATED POWER.

6939 APPLIED VOLTAGE SHALL BE NOT GREATER THAN 6939 VOLTS.

6706 TEST POTENTIAL SHALL BE 6706 VOLTS, AC.

6707 TEST POTENTIAL SHALL BE 6707 VOLTS, DC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RELIABILITY SCREENING (CONT)	
PER MIL-STD-202, METHOD 108. (CONT)	
ELECTRICAL LOAD (OHMS)	6920
MEASUREMENT INTERVALS (HOURS)	6922
MOUNTING SHALL BE _____	2760
NUMBER OF OPERATIONS (QUANTITY	3906
COIL VOLTAGE (SELECT ONE)	
(VOLTS)	3907
(PERCENT OF RATED)	3908
COIL CURRENT (SELECT ONE)	
(AMPERES)	3909
(PERCENT OF RATED)	3910
LOAD VOLTAGE (SELECT ONE)	
(VOLTS)	3911
(MILLIVOLTS)	3912
LOAD CURRENT (SELECT ONE)	
(AMPERES)	3913
(MILLIAMPERES)	3914

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6920	THE ELECTRICAL LOAD SHALL BE 6920 OHMS.
6922	MEASUREMENTS SHALL BE TAKEN AT 6922 HOUR(S) INTERVALS DURING THE TEST.
2760	MOUNTING SHALL BE 2760.
3906	THERE SHALL BE 3906 OPERATION(S).
3907	THE COIL VOLTAGE SHALL BE 3907 VOLT(S).
3908	THE COIL VOLTAGE SHALL BE 3908 PERCENT OF THE RATED COIL VOLTAGE.
3909	THE COIL CURRENT SHALL BE 3909 AMPERE(S).
3910	THE COIL CURRENT SHALL BE 3910 PERCENT OF THE RATED COIL CURRENT.
3911	THE LOAD VOLTAGE SHALL BE 3911 VOLT(S).
3912	THE LOAD VOLTAGE SHALL BE 3912 MILLIVOLT(S).
3913	THE LOAD CURRENT SHALL BE 3913 AMPERE(S).
3914	THE LOAD CURRENT SHALL BE 3914 MILLIAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDES (KCI)

CHARACTERISTIC NAME	CHAR CODE
RELIABILITY SCREENING (CONT)	
PER MIL-STD-293, METHOD 108. (CONT)	
PERFORM INTERNAL MOISTURE TEST.	3915
ENERGIZED DURATION (MINUTES)	3916
DISTANCE OF TEMPERATURE MEASUREMENTS FROM SPECIMENS (SELECT ONE)	
(INCHES)	6702
(MILLIMETERS)	6703
RESISTANCE TO SOLDERING HEAT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4700
NO EVIDENCE OF PHYSICAL DAMAGE.	4701

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

3915 PERFORM THE INTERNAL MOISTURE TEST.

3916 THE ENERGIZED DURATION SHALL BE 3916 MINUTE(S).

6702 TEMPERATURE SHALL BE MEASURED AT 6702 INCH(S) FROM THE SPECIMEN.

6703 TEMPERATURES SHALL BE MEASURED AT 6703 MILLIMETER(S) FROM THE SPECIMEN.

4700 RESISTANCE TO SOLDERING HEAT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4700.

4701 RESISTANCE TO SOLDERING HEAT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO SOLDERING HEAT (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2770
REMAIN WITHIN THE FOLLOWING SPECIFIED TOLERANCES:	
CONTACT RESISTANCE/VOLTAGE DROP.	2771
DIELECTRIC WITHSTANDING VOLTAGE.	2772
PICKUP VOLTAGE OR CURRENT.	2773
DROPOUT VOLTAGE OR CURRENT.	2774
OPERATE AND RELEASE TIME.	2775
RECYCLE TIME.	2776
OTHER _____	2777
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4689
PER MIL-STD-202, METHOD 210.	4698
*TEST CONDITION (LETTER)	4691
NUMBER OF TERMINATIONS TESTED (QUANTITY)	4694

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2770 THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 2770 MEGOHM(S).

THE ITEM(S) SHALL REMAIN WITHIN THE FOLLOWING SPECIFIED TOLERANCES:

2771 CONTACT RESISTANCE /VOLTAGE DROP.

2772 DIELECTRIC WITHSTANDING VOLTAGE.

2773 PICKUP VOLTAGE OR CURRENT.

2774 DROPOUT VOLTAGE OR CURRENT.

2775 OPERATE AND RELEASE TIME.

2776 RECYCLE TIME.

2777 2777.

4689 RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4689.

4698 RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 210 OF MIL-STD-202.

4691 TEST CONDITION LETTER 4691 SHALL APPLY.

4694 4694 TERMINATION(S) PER UNIT SHALL BE TESTED,

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO SOLDERING HEAT (CONT)	
PER MIL-STD-202, METHOD 210. CONT)	
DEPTH OF IMMERSION IN SOLDER (SELECT ONE)	
(INCHES)	4692
(MILLIMETERS)	4669
DISTANCE FROM RELAY BASE (SELECT ONE)	
(INCHES)	2780
(MILLIMETERS)	2782
IMMERSION IN FLUX PERMITTED,	4671
SPECIAL PREPARATIONS PERMITTED.	4989
COOLING TIME (MINUTES)	4695
METHOD OF INTERNAL INSPECTION ____	5033
RESISTANCE TO SOLVENTS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4834
NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.	4830
MARKING SHALL REMAIN LEGIBLE.	4836

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4692 DEPTH OF IMMERSION IN SOLDER SHALL BE 4692 INCH(S).

4669 DEPTH OF IMMERSION IN SOLDER SHALL BE 4669 MILLIMETER(S),

2780 THE DEPTH OF IMMERSION IN SOLDER SHALL BE WITHIN 2780 INCH(S) OF THE RELAY BASE.

2782 THE DEPTH OF IMMERSION IN SOLDER SHALL BE WITHIN 2782 MILLIMETER(S) OF THE RELAY BASE.

4671 IMMERSION OF TERMINATIONS IN FLUX SHALL BE PERMITTED.

4989 SPECIAL PREPARATION SHALL BE PERMITTED.

4695 COOLING TIME SHALL BE 4695 MINUTE(S) PRIOR TO FINAL EXAMINATION AND MEASUREMENTS.

5033 THE METHOD OF INTERNAL INSPECTION SHALL BE 5033.

4834 RESISTANCE TO SOLVENTS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4834.

4830 RESISTANCE TO SOLVENTS. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.

4836 MARKING SHALL REMAIN LEGIBLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO SOLVENTS (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4829
PER MIL-STD-202, METHOD 215.	4839
SOLVENTS TO BE ADDED (NAME)	4838
SOLVENTS TO BE DELETED (SUBPARAGRAPH LETTER)	4835
BRUSH MARKING AREA.	4831
ALL OF SPECIMEN TO BE BRUSHED.	6279
NUMBER OF SPECIMENS TO BE TESTED (QUANTITY)	2784
SPECIMENS TO BE TESTED SHALL BE ____	2786
REVERSE POLARITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2790
AS FOLLOWS:	2792

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4829	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4829.
4839	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 215 OF MIL-STD-202. THE SPECIMENS SHALL BE DIVIDED INTO GROUPS OF EQUAL NUMBER TO THE EXTENT POSSIBLE.
4838	IN ADDITION TO THE SPECIFIED SOLVENT(S), 4838 SHALL ALSO BE USED.
4835	BRUSHING SHALL BE PERFORMED WITH THE SOLVENTS IN ACCORDANCE WITH METHOD 215 OF MIL-STD-202, EXCEPT THAT SOLUTION(S) 4835 SHALL NOT BE USED.
4831	THE MARKING AREA SHALL BE BRUSHED.
6279	THE ENTIRE SURFACE SHALL BE BRUSHED.
2784	THERE SHALL BE 2784 SPECIMENS TESTED.
2786	SPECIMENS TO BE TESTED SHALL BE 2786.
2790	REVERSE POLARITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2790.
2792	REVERSE POLARITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
REVERSE POLARITY (CONT)	
AS FOLLOWS: (CONT)	
SHALL NOT OPERATE OR START TIMING.	2794
NO EVIDENCE OF PHYSICAL DAMAGE.	2796
REMAIN WITHIN TIMING CYCLE AND RECYCLE TIME TOLERANCES.	2797
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2800
PER MIL-R-83726.	2802
TEST VOLTAGE (SELECT ONE)	
(PERCENT OF RATED)	2803
(VOLTS, AC)	2804
(VOLTS, DC)	2805
VOLTAGE APPLICATION DURATION (SELECT ONE)	
(SECONDS)	2806
(MINUTES)	2807

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2794	THE ITEM(S) SHALL NOT OPERATE OR START TIMING.
2796	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2797	THE ITEM(S) SHALL REMAIN WITHIN TIMING CYCLE AND RECYCLE TIME TOLERANCES.
2800	REVERSE POLARITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2800.
2802	REVERSE POLARITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-83726.
2803	THE TEST VOLTAGE SHALL BE 2803 PERCENT OF THE RATED VOLTAGE.
2804	THE TEST VOLTAGE SHALL BE 2804 VOLTS, AC.
2805	THE TEST VOLTAGE SHALL BE 2805 VOLTS, DC.
2806	THE VOLTAGE APPLICATION DURATION SHALL BE 2806 SECOND(S).
2807	THE VOLTAGE APPLICATION DURATION SHALL BE 2807 MINUTE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RUPTURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2810
AS FOLLOWS:	2812
NO CONTACT WELDING.	2813
MAKE AND BREAK SPECIFIED RUPTURE CURRENT.	2814
NO BLOWING OF FUSE BETWEEN CASE AND LOAD SYSTEM GROUND OR NEUTRAL.	2815
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2820
PER DOCUMENT (DOC DES)	2822
MINIMUM NUMBER OF TEST CYCLES (QUANTITY)	2823
DUTY CYCLE	
"ON" (SECONDS)	2824
"OFF" (SECONDS)	2825

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2810 RUPTURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2810.

2812 RUPTURE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2813 THERE SHALL BE NO CONTACT WELDING.

2814 THE ITEM(S) SHALL MAKE AND BREAK SPECIFIED RUPTURE CURRENT.

2815 THERE SHALL BE NO BLOWING OF THE FUSE BETWEEN THE CASE AND LOAD SYSTEM GROUND OR NEUTRAL.

2820 RUPTURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2820.

2822 RUPTURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2822.

2823 THERE SHALL BE NOT LESS THAN 2823 TEST CYCLES.

THE DUTY CYCLE SHALL BE AS FOLLOWS:

2824 'ON' 2824 SECOND(S)

2825 'OFF' 2825 SECOND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RUPTURE (CONT)	
PER DOCUMENT (CONT)	
TEST VOLTAGE (SELECT ONE)	
(PERCENT OF RATED)	2826
(VOLTS, DC)	2827
(VOLTS, AC)	2828
(VOLTS, AC, 3 PHASE)	2829
TEST LOAD CURRENT (SELECT ONE)	
(PERCENT OF RATED)	2830
(AMPERES)	2831
SALT SPRAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4878
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF Performance	4782

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2826	THE TEST VOLTAGE SHALL BE ~~2826~~ PERCENT OF THE RATED VOLTAGE.
2827	THE TEST VOLTAGE SHALL BE ~~2827~~ VOLTS, DC.
2828	THE TEST VOLTAGE SHALL BE ~~2828~~ VOLTS, AC.
2829	THE TEST VOLTAGE SHALL BE ~~2829~~ VOLTS, AC, 3 PHASE.
2830	THE TEST LOAD CURRENT SHALL BE ~~2830~~ PERCENT OF THE RATED CURRENT.
2831	THE TEST LOAD CURRENT SHALL BE ~~2831~~ AMPERE(S).
4878	SALT SPRAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4878.
4782	SALT SPRAY. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT SPRAY (CONT)	
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE. (CONT)	
REMAIN WITHIN THE FOLLOWING SPECIFIED TOLERANCES:	
CONTACT RESISTANCE/VOLTAGE DROP.	2840
DIELECTRIC WITHSTANDING VOLTAGE.	2841
PICKUP VOLTAGE OR CURRENT.	2842
DROPOUT VOLTAGE OR CURRENT.	2843
OPERATE AND RELEASE TIME.	2844
RECYCLE TIME.	2845
OTHER _____	2846
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4770
PER MIL-STD-202, METHOD 101.	4771
*TEST CONDITION (LETTER)	4772

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	THE ITEM(S) SHALL REMAIN WITHIN THE FOLLOWING SPECIFIED TOLERANCES:
2840	CONTACT RESISTANCE/VOLTAGE DROP.
2841	DIELECTRIC WITHSTANDING VOLTAGE.
2842	PICKUP VOLTAGE OR CURRENT.
2843	DROPOUT VOLTAGE OR CURRENT.
2844	OPERATE AND RELEASE TIME.
2845	RECYCLE TIME.
2846	2846.
4770	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4770.
4771	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 101 OF MIL-STD-202.
4772	TEST CONDITION LETTER 4772 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT SPRAY (CONT)	
PER MIL-STD-202, METHOD 101. (CONT)	
MOUNTING (SELECT ONE)	
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4773
MOUNTING SHALL BE BY NORMAL METHOD.	4765
MOUNTING SHALL BE BY ANY SUITABLE METHOD.	4766
SAND AND DUST	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4958
NO EVIDENCE OF DUST PENETRATION.	4959
REMAIN WITHIN THE FOLLOWING SPECIFIED TOLERANCES:	
CONTACT RESISTANCE/VOLTAGE DROP.	2850
PICKUP VOLTAGE OR CURRENT.	2851
DROPOUT VOLTAGE OR CURRENT.	2852
OPERATE AND RELEASE TIME.	2853
OTHER _____	2854

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4773	MOUNTING SHALL BE IN ACCORDANCE WITH ~~4773.~~
4765	MOUNTING SHALL BE BY THE NORMAL METHOD.
4766	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4958	SAND AND DUST. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT ~~4958.~~
4959	SAND AND DUST. THERE SHALL BE NO EVIDENCE OF DUST PENETRATION.
	THE ITEM(S) SHALL REMAIN WITHIN THE FOLLOWING SPECIFIED TOLERANCES:
2850	CONTACT RESISTANCE/VOLTAGE DROP.
2851	PICKUP VOLTAGE OR CURRENT.
2852	DROPOUT VOLTAGE OR CURRENT.
2853	OPERATE AND RELEASE TIME.
2854	2854.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SAND AND DUST (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4952
PER MIL-STD-202, METHOD 110.	4960
TEST SPECIMENS SHALL BE OPERATED DURING TEST STEPS (NUMBER)	4872
*DURATION OF OPERATION (HOURS)	6299
SPECIMEN ORIENTATION SHALL BE CHANGED DURING TEST.	1539
SECOND 6-HOUR TEST REQUIRED IMMEDIATELY FOLLOWING TEMPERATURE STABILIZATION IN STEP 20	4956
SAND AND DUST VELOCITY THROUGH CHAMBER (SELECT ONE)	
(FEET PER MINUTE)	2855
(METERS PER SECOND)	2856
TEST TEMPERATURE (DEGREES CELSIUS)	2857

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4952	SAND AND DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4952.
4960	SAND AND, DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 110 OF MIL-STD-202.
4872	ITEM(S) SHALL BE OPERATED DURING STEP(S) 4872.
6299	DURATION OF OPERATION SHALL BE 6299 HOUR(S).
1539	ORIENTATION SHALL BE CHANGED DURING THE TEST.
4956	THE SECOND 6-HOUR TEST SHALL BE PERFORMED IMMEDIATELY AFTER REACHING TEMPERATURE STABILIZATION IN STEP 2.
2855	THE SAND AND DUST VELOCITY THROUGH THE CHAMBER SHALL BE 2855 FEET PER SECOND.
2856	THE SAND AND DUST VELOCITY THROUGH THE CHAMBER SHALL BE 2856 METERS PER SECOND.
2857	THE TEST TEMPERATURE SHALL BE 2857 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	4745
AS FOLLOWS:	6370
SPECIFIED TEST METHOD SENSITIVITY.	4746
NO BUBBLES INDICATIVE OF LEAKAGE.	4748
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4734
PER MIL-STD-202, METHOD 112.	4732
*TEST CONDITION LETTER	
LETTER A.	4737
LIQUID FOR BATH (NAME)	4738
MINIMUM BATH TEMPERATURE (DEGREES CELSIUS)	4739
LETTER B.	6320

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4745	SEAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4745.
6370	SEAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
4746	THE REQUIREMENTS SHALL BE IN ACCORDANCE WITH THE SPECIFIED TEST METHOD SENSITIVITY.
4748	THERE SHALL BE NO BUBBLES INDICATIVE OF LEAKAGE.
4734	SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4734.
4732	SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 112 OF MIL-STD-202.
4737	TEST CONDITION LETTER A SHALL APPLY.
4738	LIQUID FOR BUBBLE BATH SHALL BE 4738.
4739	TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 4739 DEGREES CELSIUS.
6320	TEST CONDITION LETTER B SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
LETTER B. (CONT)	
LIQUID FOR BATH (NAME)	6321
MINIMUM BATH TEMPERATURE (DEGREES CELSIUS)	6322
LETTER C.	6323
*LEAK RATE SENSITIVITY (ATM CC/SEC)	4741
*TEST PROCEDURE (SELECT ONE)	
TEST PROCEDURE I.	4740
VACUUM PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	4742
(KILOPASCALS)	4736
TEST PROCEDURE II.	6324
BACKFILL PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	6325
(KILOPASCALS)	6326
NUMBER OF PRESSURE CYCLES (QUANTITY)	4749

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6321	LIQUID FOR BUBBLE TEST BATH SHALL BE 6321.
6322	TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 6322 DEGREES CELSIUS.
6323	TEST CONDITION LETTER C SHALL APPLY.
4741	LEAK SENSITIVITY RATE SHALL BE 4741 ATM CC/SEC.
4740	PROCEDURE NUMBER I SHALL APPLY.
4742	VACUUM PRESSURE SHALL BE 4742 POUNDS PER SQUARE INCH.
4736	VACUUM PRESSURE SHALL BE 4736 KILOPASCALS.
6324	PROCEDURE NUMBER 11 SHALL APPLY.
6325	BACKFILL PRESSURE SHALL BE 6325 POUNDS PER SQUARE INCH.
6326	BACKFILL PRESSURE SHALL BE 6326 KILOPASCALS.
4749	THERE SHALL BE 4749 PRESSURE CYCLE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
LETTER C. (CONT)	
TEST PROCEDURE III.	6328
GROSS LEAK TEST CONDITION (LETTER)	4750
TEST PROCEDURE IV.	6329
CHAMBER PRESSURE (SELECT ONE)	
(TORR)	4751
(KILOPASCALS)	4735
DURATION OF REDUCED PRESSURE (MINUTES)	4752
GROSS LEAK TEST CONDITION (LETTER)	6330
PERFORATION OF SPECIMEN REQUIRED.	5034
LETTER D.	6331
ANY SUITABLE MOUNTING FIXTURE.	4743
LETTER E.	6332
ANY SUITABLE MOUNTING FIXTURE.	6333
SHELF LIFE, ACCELERATED	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2860

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6328	PROCEDURE NUMBER III SHALL APPLY.
4750	GROSS LEAK TEST CONDITION LETTER 4750 SHALL APPLY.
6329	PROCEDURE NUMBER IV SHALL APPLY.
4751	CHAMBER PRESSURE SHALL BE 4751 TORR.
4735	CHAMBER PRESSURE SHALL BE 4735 KILOPASCALS.
4752	DURATION AT LOW PRESSURE SHALL BE 4752 MINUTE(S).
6330	GROSS LEAK TEST CONDITION LETTER 6330 SHALL APPLY.
5034	PERFORATION OF THE SPECIMEN IS REQUIRED.
6331	TEST CONDITION LETTER D SHALL APPLY.
4743	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
6332	TEST CONDITION LETTER E SHALL APPLY.
6333	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
2860	SHELF LIFE, ACCELERATED. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2860.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHELF LIFE, ACCELERATED (CONT)	
REQUIREMENTS (CONT)	
REMAIN WITHIN DIELECTRIC WITHSTANDING VOLTAGE REQUIREMENTS.	2862
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2870
PER MIL-R-83725.	2872
TEST TEMPERATURE (SELECT ONE)	
(PERCENT OF MAXIMUM RATED)	2873
(DEGREES CELSIUS)	2874
DURATION AT TEST TEMPERATURE (HOURS)	2875
SHOCK, HIGH IMPACT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1494
NO EVIDENCE OF PHYSICAL DAMAGE.	1495
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2880

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2862 SHELF LIFE, ACCELERATED. THE ITEM(S) SHALL REMAIN WITHIN DIELECTRIC WITHSTANDING VOLTAGE REQUIREMENT(S).

2870 SHELF LIFE, ACCELERATED. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2870.

2872 SHELF LIFE, ACCELERATED. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-83725.

2873 THE TEST TEMPERATURE SHALL BE 2873 PERCENT OF THE MAXIMUM RATED TEMPERATURE.

2874 THE TEST TEMPERATURE SHALL BE 2874 DEGREES CELSIUS.

2875 THE ITEM(S) SHALL REMAIN AT THE TEST TEMPERATURE FOR 2875 HOUR(S).

1494 SHOCK, HIGH IMPACT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1494.

1495 SHOCK, HIGH IMPACT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

2880 THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 2880 MEGOHM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, HIGH IMPACT (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY DURING TEST.	2881
MAXIMUM DISCONTINUITY	
OPENING OF CLOSED CONTACTS (SELECT ONE)	
(MICROSECONDS)	2882
(MILLISECONDS)	2883
CLOSING OF OPEN CONTACTS (SELECT ONE)	
(MICROSECONDS)	2884
(MILLISECONDS)	2885
OPENING OR CLOSING OF CONTACTS (SELECT ONE)	
(MICROSECONDS)	2886
(MILLISECONDS)	2887

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2881 THERE SHALL BE NO DISCONTINUITY DURING TEST.

MAXIMUM DISCONTINUITY SHALL BE AS FOLLOWS:

2882 OPENING OF CLOSED CONTACTS SHALL BE NOT GREATER THAN ~~2882~~ MICROSECOND(S).

2883 OPENING OF CLOSED CONTACTS SHALL BE NOT GREATER THAN ~~2883~~ MILLISECOND(S).

2884 CLOSING OF OPEN CONTACTS SHALL BE NOT GREATER THAN 2884 MICROSECOND(S).

2885 CLOSING OF OPEN CONTACTS SHALL BE NOT GREATER THAN ~~2885~~ MILLISECOND(S).

2886 OPENING OR CLOSING OF CONTACTS SHALL BE NOT GREATER THAN 2886 MICROSECOND(S).

2887 OPENING OR CLOSING OF CONTACTS SHALL BE NOT GREATER THAN 2887 MILLISECOND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, HIGH IMPACT (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
REMAIN WITHIN THE FOLLOWING SPECIFIED TOLERANCES:	
CONTACT RESISTANCE/VOLTAGE DROP.	2888
DIELECTRIC WITHSTANDING VOLTAGE.	2889
PICKUP VOLTAGE OR CURRENT.	2890
DROPOUT VOLTAGE OR CURRENT.	2891
OPERATE AND RELEASE TIME.	2892
RECYCLE TIME.	2893
CONTACT BOUNCE.	2894
OTHER _____	2895
REMAIN IN LATCHED POSITION.	2896
NO LAMP IN TEST CIRCUIT SHALL LIGHT.	1550
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1486
PER MIL-STD-202, METHOD 207.	1482

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	THE ITEM(S) SHALL REMAIN WITHIN THE FOLLOWING SPECIFIED TOLERANCES:
2888	CONTACT RESISTANCE/VOLTAGE DROP.
2889	DIELECTRIC WITHSTANDING VOLTAGE.
2890	PICKUP VOLTAGE OR CURRENT.
2891	DROPOUT VOLTAGE OR CURRENT.
2892	OPERATE AND RELEASE TIME.
2893	RECYCLE TIME.
2894	CONTACT BOUNCE.
2895	2895.
2896	THE RELAY SHALL REMAIN IN THE LATCHED POSITION.
1550	NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.
1486	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1486.
1482	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 207 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, HIGH IMPACT (CONT)	
PER MIL-STD-202, METHOD 207. (CONT)	
*MOUNTING FIXTURE (SELECT ONE)	
FIGURE NUMBER FROM METHOD 207 OF MIL-STD-202 (NUMBER)	1488
ANY SUITABLE MOUNTING FIXTURE.	1478
MOUNTING FIXTURE PER DOCUMENT (DOC DES)	1468
MOUNTING SHALL BE ____	2900
MONITOR CONTACT CHATTER PER METHOD 310 OF MIL-STD-202.	
*TEST CIRCUIT (LETTER)	1487
*TEST CONDITION (LETTER)	1479
PERCENT RATED LOAD APPLIED (PERCENT)	6203
NUMBER OF IMPACTS (QUANTITY)	2902
ELECTRICAL OPERATING CONDITIONS	
WITH ITEMS ENERGIZED ____	2904
WITH ITEMS DEENERGIZED ____	2906

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1488	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH FIGURE 1488 OF METHOD 207 OF MIL-STD-202.
1478	THE MOUNTING FIXTURE SHALL BE ANY SUITABLE MOUNTING FIXTURE.
1468	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH 1468.
2900	MOUNTING SHALL BE 2900.
1487	MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1487 SHALL APPLY.
1479	TEST CONDITION LETTER 1479 OF METHOD 310 OF MIL-STD-202 SHALL APPLY.
6203	THE ELECTRICAL LOAD SHALL BE 6203 PERCENT OF THE RATED LOAD.
2902	THERE SHALL BE 2902 IMPACTS.
2904	ELECTRICAL OPERATING CONDITIONS WITH THE ITEM(S) ENERGIZED SHALL BE 2904.
2906	ELECTRICAL OPERATING CONDITIONS WITH THE ITEM(S) DEENERGIZED SHALL BE 2906.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, SPECIFIED PULSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1508
NO EVIDENCE OF PHYSICAL DAMAGE.	1509
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2910
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY DURING TEST.	2911
MAXIMUM DISCONTINUITY	
OPENING OF CLOSED CONTACTS (SELECT ONE)	
(MICROSECONDS)	2912
(MILLISECONDS)	2913
CLOSING OF OPEN CONTACTS (SELECT ONE)	
(MICROSECONDS)	2914
(MILLISECONDS)	2915

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1508 SHOCK, SPECIFIED PULSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1508.

1509 SHOCK, SPECIFIED PULSE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

2910 THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 2910 MEGOHM(S).

2911 THERE SHALL BE NO DISCONTINUITY DURING TEST.

MAXIMUM DISCONTINUITY SHALL BE AS FOLLOWS:

2912 OPENING OF CLOSED CONTACTS SHALL BE NOT GREATER THAN 2912 MICROSECOND(S).

2913 OPENING OF CLOSED CONTACTS SHALL BE NOT GREATER THAN 2913 MILLISECOND(S).

2914 CLOSING OF OPEN CONTACTS SHALL BE NOT GREATER THAN 2914 MICROSECOND(S).

2915 CLOSING OF OPEN CONTACTS SHALL BE NOT GREATER THAN 2915 MILLISECOND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, SPECIFIED PULSE (CONT)	
MAXIMUM DISCONTINUITY (CONT)	
OPENING OR CLOSING OF CONTACTS (SELECT ONE)	
(MICROSECONDS)	2916
(MILLISECONDS)	2917
REMAIN WITHIN THE FOLLOWING SPECIFIED TOLERANCES:	
CONTACT RESISTANCE/VOLTAGE DROP.	2918
DIELECTRIC WITHSTANDING VOLTAGE.	2919
PICKUP VOLTAGE OR CURRENT.	2920
DROPOUT VOLTAGE OR CURRENT.	2921
OPERATE AND RELEASE TIME.	2922
RECYCLE TIME.	2923
CONTACT BOUNCE.	2924
OTHER ____	2925
REMAIN IN LATCHED POSITION.	2926
NO LAMP IN TEST CIRCUIT SHALL LIGHT.	1551

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2916	OPENING OR CLOSING OF CONTACTS SHALL BE NOT GREATER THAN 2916 MICROSECOND(S).
2917	OPENING OR CLOSING OF CONTACTS SHALL BE NOT GREATER THAN 2917 MILLISECOND(S).
	THE ITEM(S) SHALL REMAIN WITHIN THE FOLLOWING SPECIFIED TOLERANCES:
2918	CONTACT RESISTANCE/VOLTAGE DROP.
2919	DIELECTRIC WITHSTANDING VOLTAGE.
2920	PICKUP VOLTAGE OR CURRENT.
2921	DROPOUT VOLTAGE OR CURRENT.
2922	OPERATE AND RELEASE TIME.
2923	RECYCLE TIME.
2924	CONTACT BOUNCE.
2925	2925.
2926	THE RELAY SHALL REMAIN IN THE LATCHED POSITION.
1551	NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, SPECIFIED PULSE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1502
PER MIL-STD-202, METHOD 213.	1500
*TEST CONDITION (LETTER)	1504
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	4686
NORMAL MOUNTING METHOD.	4685
MOUNT PER DOCUMENT (DOC DES)	4684
MOUNTING SHALL BE ____	2930
MONITOR CONTACT CHATTER PER METHOD 310 OF MIL-STD-202.	
*TEST CIRCUIT (LETTER)	1503
*TEST CONDITION (LETTER)	1499
PERCENT RATED LOAD APPLIED (PERCENT)	6204

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1502	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1502.
1500	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 213 OF MIL-STD-202.
1504	TEST CONDITION LETTER 1504 SHALL APPLY.
4686	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4685	MOUNTING SHALL BE BY THE NORMAL METHOD.
4684	MOUNTING SHALL BE IN ACCORDANCE WITH 4684.
2930	MOUNTING SHALL BE 2930.
1503	MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT 1503 SHALL APPLY.
1499	TEST CONDITION LETTER 1499 OF METHOD 310 OF MIL-STD-202 SHALL APPLY.
6204	THE ELECTRICAL LOAD SHALL BE 6204 PERCENT OF THE RATED LOAD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, SPECIFIED PULSE (CONT)	
PER MIL-STD-202, METHOD 213. (CONT)	
NUMBER OF IMPACTS (QUANTITY)	2932
ELECTRICAL OPERATING CONDITIONS	
WITH ITEMS ENERGIZED ____	2934
WITH ITEMS DEENERGIZED ____	2936
SOLDERABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4674
NO EVIDENCE OF PHYSICAL DAMAGE.	4675
MEET EVALUATION CRITERIA SPECIFIED IN METHOD 208 OF MIL-STD-202.	4672
REMAIN WITHIN SPECIFIED TOLERANCE.	4677
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4662

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2932	THERE SHALL BE 2932 IMPACTS.
2934	ELECTRICAL OPERATING CONDITIONS WITH THE ITEM(S) ENERGIZED SHALL BE 2934.
2936	ELECTRICAL OPERATING CONDITIONS WITH THE ITEM(S) DEENERGIZED SHALL BE 2936.
4674	SOLDERABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4674.
4675	SOLDERABILITY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4672	THE RESULTS OF THE SOLDERABILITY TEST SHALL BE IN ACCORDANCE WITH THE ACCEPTANCE CRITERIA OF METHOD 208 OF MIL-STD-202.
4677	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4662	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4662.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SOLDERABILITY (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 208.	4683
NUMBER OF TERMINALS TO BE TESTED (QUANTITY)	4666
DEPTH OF IMMERSION (SELECT ONE)	
(INCHES)	4667
(MILLIMETERS)	4663
DISTANCE WRAP WIRE APPLIED FROM BODY (SELECT ONE)	
(INCHES)	4664
(MILLIMETERS)	4665
SPECIAL PREPARATIONS PERMITTED.	6205
STRENGTH OF MOUNTING MEANS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2940
AS FOLLOWS:	2942
NO EVIDENCE OF DAMAGE.	2943
REMAIN WITHIN SPECIFIED TOLERANCES.	2944

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4683	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 208 OF MIL-STD-202.
4666	4666 TERMINATION(S) PER UNIT SHALL BE TESTED.
4667	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4667 INCH(S).
4663	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4663 MILLIMETER(S).
4664	THE WRAP WIRE SHALL BE 4664 INCH(S) FROM THE BODY.
4665	THE WRAP WIRE SHALL BE 4665 MILLIMETER(S) FROM THE BODY.
6205	SPECIAL PREPARATION SHALL BE PERMITTED.
2940	STRENGTH OF MOUNTING MEANS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2940.
2942	STRENGTH OF MOUNTING MEANS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2943	THERE SHALL BE NO EVIDENCE OF DAMAGE.
2944	THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STRENGTH OF MOUNTING MEANS (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2950
PER MIL-R-83726.	2952
FORCE/TORQUE DURATION (SELECT ONE)	
(SECONDS)	2953
(MINUTES)	2954
APPLIED TORQUE (SELECT ONE)	
(POUND-INCHES)	2955
(NEWTON METERS)	2956
APPLIED FORCE (SELECT ONE)	
(POUNDS)	2957
(NEWTONS)	2958
TEMPERATURE-ALTITUDE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2960

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2950	STRENGTH OF MOUNTING MEANS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2950.
2952	STRENGTH OF MOUNTING MEANS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-83726.
2953	THE FORCE/TORQUE APPLICATION DURATION SHALL BE 2953 SECONDS.
2954	THE FORCE/TORQUE APPLICATION DURATION SHALL BE 2954 MINUTE(S).
2955	THE APPLIED TORQUE SHALL BE 2955 POUND-INCH(S).
2956	THE APPLIED TORQUE SHALL BE 2956 NEWTON METER(S).
2957	THE APPLIED FORCE SHALL BE 2957 POUND(S).
2958	THE APPLIED FORCE SHALL BE 2958 NEWTON(S).
2960	TEMPERATURE-ALTITUDE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2960.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE-ALTITUDE (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	2962
REMAIN WITHIN THE FOLLOWING SPECIFIED TOLERANCES:	
CONTACT RESISTANCE/VOLTAGE DROP.	2963
DIELECTRIC WITHSTANDING VOLTAGE.	2964
PICKUP VOLTAGE OR CURRENT.	2965
DROPOUT VOLTAGE OR CURRENT.	2966
OPERATE AND RELEASE TIME.	2967
INSULATION RESISTANCE.	2969
CONTACT BOUNCE.	2968
OTHER _____	2970
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2980
PER DOCUMENT (DOC DES)	2982
DURATION OF EACH STEP (MINUTES)	2983

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2962	TEMPERATURE-ALTITUDE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
	THE ITEM(S) SHALL REMAIN WITHIN THE FOLLOWING SPECIFIED TOLERANCES:
2963	CONTACT RESISTANCE/VOLTAGE DROP.
2964	DIELECTRIC WITHSTANDING VOLTAGE.
2965	PICKUP VOLTAGE OR CURRENT.
2966	DROPOUT VOLTAGE OR CURRENT.
2967	OPERATE AND RELEASE TIME.
2969	INSULATION RESISTANCE.
2968	CONTACT BOUNCE.
2970	2970.
2980	TEMPERATURE-ALTITUDE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2980.
2982	TEMPERATURE-ALTITUDE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2982.
2983	THE DURATION OF EACH STEP SHALL BE 2983 MINUTE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE-ALTITUDE (CONT)	
PER DOCUMENT (CONT)	
COIL VOLTAGE (SELECT ONE)	
(PERCENT OF RATED)	2984
(VOLTS, AC)	2985
(VOLTS, DC)	2986
CONTACT LOAD (SELECT ONE)	
(PERCENT OF RATED)	2987
(AMPERES)	2988
LOAD TYPE (TYPE)	2989
TEMPERATURE, HIGH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	6228
NO EVIDENCE OF PHYSICAL DAMAGE.	6229
MINIMUM INSULATION RESISTANCE (MEGOHMS)	3000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2984	THE COIL VOLTAGE SHALL BE 2984 PERCENT OF THE RATED COIL VOLTAGE.
2985	THE COIL VOLTAGE SHALL BE 2985 VOLTS, AC.
2986	THE COIL VOLTAGE SHALL BE 2986 VOLTS, DC.
2987	THE CONTACT LOAD SHALL BE 2987 PERCENT OF THE RATED LOAD.
2988	THE CONTACT LOAD SHALL BE 2988 AMPERE(S).
2989	THE LOAD TYPE SHALL BE 2989.
6228	TEMPERATURE, HIGH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6228.
6229	TEMPERATURE, HIGH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
3000	THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 3000 MEGOHM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, HIGH (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
REMAIN WITHIN THE FOLLOWING SPECIFIED TOLERANCES:	
CONTACT RESISTANCE/VOLTAGE DROP.	3002
DIELECTRIC WITHSTANDING VOLTAGE.	3003
PICKUP VOLTAGE OR CURRENT.	3004
DROPOUT VOLTAGE OR CURRENT.	3005
OPERATE AND RELEASE TIME.	3006
RECYCLE TIME.	3007
CONTACT BOUNCE.	3008
OTHER _____	3009
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	6217
PER DOCUMENT (DOC DES)	3010
*PROCEDURE (ROMAN NUMERAL)	6219
STORAGE TEMPERATURE (DEGREES CELSIUS)	6220
STORAGE DURATION (HOURS)	6221

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	THE ITEM(S) SHALL REMAIN WITHIN THE FOLLOWING SPECIFIED TOLERANCES:
3002	CONTACT RESISTANCE/VOLTAGE DROP.
3003	DIELECTRIC WITHSTANDING VOLTAGE.
3004	PICKUP VOLTAGE OR CURRENT.
3005	DROPOUT VOLTAGE OR CURRENT.
3006	OPERATE AND RELEASE TIME.
3007	RECYCLE TIME.
3008	CONTACT BOUNCE.
3009	3009.
6217	TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6217.
3010	TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3010.
6219	PROCEDURE NUMBER 6219 SHALL APPLY.
6220	STORAGE TEMPERATURE SHALL BE 6220 DEGREES CELSIUS.
6221	STORAGE DURATION SHALL BE 6221 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, HIGH (CONT)	
PER DOCUMENT (CONT)	
HIGHEST OPERATING TEMPERATURE (DEGREES CELSIUS)	6222
OPERATION TIME (SELECT ONE)	
(MINUTES)	6224
(HOURS)	6225
TEMPERATURE, LOW	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	6318
NO EVIDENCE OF PHYSICAL DAMAGE.	6319
MINIMUM INSULATION RESISTANCE (MEGOHMS)	3020
REMAIN WITHIN THE FOLLOWING SPECIFIED TOLERANCES:	
CONTACT RESISTANCE/VOLTAGE DROP.	3022
DIELECTRIC WITHSTANDING VOLTAGE.	3023
PICKUP VOLTAGE OR CURRENT.	3024
DROPOUT VOLTAGE OR CURRENT.	3025

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6222 HIGHEST OPERATING TEMPERATURE SHALL BE 6222 DEGREES CELSIUS.

.6224 OPERATING TIME SHALL BE 6224 MINUTE(S).

6225 OPERATING TIME SHALL BE 6225 HOUR(S).

6318 TEMPERATURE, LOW. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6318.

6319 TEMPERATURE, LOW. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

3020 THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 3020 MEGOHM(S).

THE ITEM(S) SHALL REMAIN WITHIN THE FOLLOWING SPECIFIED TOLERANCES:

3022 CONTACT RESISTANCE/VOLTAGE DROP.

3023 DIELECTRIC WITHSTANDING VOLTAGE.

3024 PICKUP VOLTAGE OR CURRENT.

3025 DROPOUT VOLTAGE OR CURRENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, LOW (CONT)	
REMAIN WITHIN THE FOLLOWING SPECIFIED TOLERANCES: (CONT)	
OPERATE AND RELEASE TIME.	3026
RECYCLE TIME.	3027
CONTACT BOUNCE.	3028
OTHER _____	3029
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	6231
PER DOCUMENT (DOC DES)	3030
STORAGE TEMPERATURE (DEGREES CELSIUS)	6234
STORAGE DURATION (HOURS)	6235
LOWEST OPERATING TEMPERATURE (DEGREES CELSIUS)	6236
CHAMBER AIR VELOCITY (SELECT ONE)	
(FEET PER SECOND)	6237
(METERS PER SECOND)	6238

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3026	OPERATE AND RELEASE TIME.
3027	RECYCLE TIME.
3028	CONTACT BOUNCE.
3029	3029.
6231	TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6231.
3030	TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3030.
6234	STORAGE TEMPERATURE SHALL BE 6234 DEGREES CELSIUS.
6235	STORAGE DURATION SHALL BE 6235 HOUR(S).
6236	LOWEST OPERATING TEMPERATURE SHALL BE 6236 DEGREES CELSIUS.
6237	CHAMBER AIR VELOCITY SHALL BE 6237 FEET PER SECOND.
6238	CHAMBER AIR VELOCITY SHALL BE 6238 METERS PER SECOND.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, LOW (CONT)	
PER DOCUMENT (CONT)	
OPERATION TIME (SELECT ONE)	
(MINUTES)	6315
(HOURS)	6316
TEST TEMPERATURE (DEGREES CELSIUS)	3032
TEST TEMPERATURE DURATION (HOURS)	3034
TEMPERATURE RISE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3040
MAXIMUM TEMPERATURE RISE (DEGREES CELSIUS)	3042
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3046
PER MIL-R-22527.	3047
TEST CURRENT (SELECT ONE)	
(PERCENT OF RATED CURRENT)	3048
(AMPERES)	3049

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6315	OPERATING TIME SHALL BE 6315 MINUTE(S).
6316	OPERATING TIME SHALL BE 6316 HOUR(S).
3032	THE TEST TEMPERATURE SHALL BE 3032 DEGREES CELSIUS.
3034	THE TEST TEMPERATURE DURATION SHALL BE 3034 HOUR(S).
3040	TEMPERATURE RISE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3040.
3042	TEMPERATURE RISE. THE TEMPERATURE RISE SHALL BE NOT GREATER THAN 3042 DEGREES CELSIUS.
3046	TEMPERATURE RISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3046.
3047	TEMPERATURE RISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-22527.
3048	THE TEST CURRENT SHALL BE 3048 PERCENT OF THE RATED CURRENT.
3049	THE TEST CURRENT SHALL BE 3049 AMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE RISE (CONT)	
PER MIL-R-22527. (CONT)	
TEST CURRENT APPLICATION DURATION (SELECT ONE)	
(MINUTES)	3050
(HOURS)	3051
TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	3052
(VOLTS, AC)	3053
NUMBER OF READINGS (QUANTITY)	3054
READING INTERVAL (MINUTES)	3055
TERMINAL STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1418
NO EVIDENCE OF PHYSICAL DAMAGE.	1433
REMAIN WITHIN SPECIFIED TOLERANCE.	6296

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3050	THE TEST CURRENT APPLICATION DURATION SHALL BE 3050 MINUTE(S).
3051	THE TEST CURRENT APPLICATION DURATION SHALL BE 3051 HOUR(S).
3052	THE TEST VOLTAGE SHALL BE 3052 VOLTS, DC.
3053	THE TEST VOLTAGE SHALL BE 3053 VOLTS, AC.
3054	THERE SHALL BE 3054 READINGS,
3055	THE READING INTERVAL SHALL BE 3055 MINUTE(S).
1418	TERMINAL STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1418.
1433	TERMINAL STRENGTH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6296	ITEM(S) SHALL REMAIN WITHIN SPECIFIED Tolerance

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINAL STRENGTH (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1410
PER MIL-STD-202, METHOD 211.	1375
*TEST CONDITIONS	
TEST CONDITION A	
APPLIED FORCE (SELECT ONE)	
(POUNDS)	1411
(NEWTONS)	1419
METHOD OF HOLDING OR CLAMPING _____	5035
TEST CONDITION B, BENDS (NUMBER)	1412
METHOD OF BENDING _____	5036
TEST FIXTURE _____	5037
TEST CONDITION C, LOAD (SELECT ONE)	
(POUNDS)	1413
(KILOGRAMS)	1420
TEST CONDITION D (SELECT ONE)	
TEST CONDITION D AS SPECIFIED,	1414

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1410 TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1410.

1375 TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 211 OF MIL-STD-202.

1411 TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1411 POUND(S).

1419 TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1419 NEWTON(S).

5035 THE METHOD OF HOLDING OR CLAMPING SHALL BE 5035.

1412 TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION Be THERE SHALL BE 1412 BEND(S).

5036 THE METHOD OF BENDING SHALL BE 5036.

5037 THE TEST FIXTURE SHALL BE 5037.

1413 TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1413 POUND(S).

1420 TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1420 KILOGRAM(S).

1414 TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION D.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINAL STRENGTH (CONT)	
TEST CONDITION D (CONT)	
TEST CONDITION D, EXCEPT ____	3060
TEST CONDITION E, TORQUE (SELECT ONE)	
(POUND-INCHES)	1416
(NEWTON METERS)	1421
NUMBER OF TERMINALS TO BE TESTED (QUANTITY)	3062
DESCRIPTION OF TERMINALS TO BE TESTED ____	3063
THERMAL EMF	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3070
MAXIMUM THERMAL EMF (MICROVOLTS PER DEGREE CELSIUS)	3072
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3074
PER DOCUMENT (DOC DES)	3076
TEST TEMPERATURE (DEGREES CELSIUS)	3078

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3060	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION D, EXCEPT 3060.
1416	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1416 POUND-INCH(S).
1421	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1421 NEWTON METERS.
3062	THERE SHALL BE 3062 TERMINALS TESTED.
3063	THE TERMINALS TO BE TESTED ARE 30630
3070	THERMAL EMF. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3070.
3072	THERMAL EMF. THE THERMAL EMF SHALL BE NOT GREATER THAN 3072 MICROVOLTS PER DEGREE CELSIUS.
3074	THERMAL EMF. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3074.
3076	THERMAL EMF. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3076.
3078	THE TEST TEMPERATURE SHALL BE 3078 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THERMAL SHOCK (TEMPERATURE CYCLING)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4722
NO EVIDENCE OF PHYSICAL DAMAGE.	4723
MINIMUM INSULATION RESISTANCE (MEGOHMS)	3080
REMAIN WITHIN THE FOLLOWING SPECIFIED TOLERANCES:	
CONTACT RESISTANCE/VOLTAGE DROP.	3081
DIELECTRIC WITHSTANDING VOLTAGE.	3082
PICKUP VOLTAGE OR CURRENT.	3083
DROPOUT VOLTAGE OR CURRENT,	3084
OPERATE AND RELEASE TIME.	3085
RECYCLE TIME.	3086
CONTACT BOUNCE.	3087
OTHER ____	3088
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4713

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4722	THERMAL SHOCK (TEMPERATURE CYCLING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4722.
4723	THERMAL SHOCK (TEMPERATURE CYCLING), THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
3080	THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 3080 MEGOHM(S).
	THE ITEM(S) SHALL REMAIN WITHIN THE FOLLOWING SPECIFIED TOLERANCES:
3081	CONTACT RESISTANCE/VOLTAGE DROP.
3082	DIELECTRIC WITHSTANDING VOLTAGE.
3083	PICKUP VOLTAGE OR CURRENT.
3084	DROPOUT VOLTAGE OR CURRENT.
3085	OPERATE AND RELEASE TIME.
3086	RECYCLE TIME.
3087	CONTACT BOUNCE.
3088	3088.
4713	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4713.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THERMAL SHOCK (TEMPERATURE CYCLING) (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 107.	4714
*TEST CONDITION (LETTER)	4715
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4719
EXPOSURE DURATION AT TEMPERATURE EXTREMES (HOURS)	3090
TRANSFER TIME	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3100
AS FOLLOWS:	3102
TRANSFER TIME INCLUDING CONTACT BOUNCE	
MINIMUM (SELECT ONE)	
(MILLISECONDS)	3103
(MICROSECONDS)	3104
MAXIMUM (SELECT ONE)	
(MILLISECONDS)	3105
(MICROSECONDS)	3106

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4714	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1107 OF MIL-STD-202.
4715	TEST CONDITION LETTER 4715 SHALL APPLY.
4719	MOUNTING SHALL BE IN ACCORDANCE WITH 4719.
3090	THE ITEM(S) SHALL BE EXPOSED AT THE TEMPERATURE EXTREMES FOR 3090 HOUR(S).
3100	TRANSFER TIME. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3100.
3102	TRANSFER TIME. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3103	THE TRANSFER TIME INCLUDING CONTACT BOUNCE SHALL BE NOT LESS THAN 3103 MILLISECOND(S).
3104	THE TRANSFER TIME INCLUDING CONTACT BOUNCE SHALL BE NOT LESS THAN 3104 MICROSECONDS.
3105	THE TRANSFER TIME INCLUDING CONTACT BOUNCE SHALL BE NOT GREATER THAN 3105 MILLISECOND(S).
3106	THE TRANSFER TIME INCLUDING CONTACT BOUNCE SHALL BE NOT GREATER THAN 3106 MICROSECONDS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TRANSFER TIME (CONT)	
AS FOLLOWS: (CONT)	
TRANSFER TIME NOT INCLUDING CONTACT BOUNCE	
MINIMUM (SELECT ONE)	
(MILLISECONDS)	3107
(MICROSECONDS)	3108
MAXIMUM (SELECT ONE)	
(MILLISECONDS)	3109
(MICROSECONDS)	3110
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3112
PER MIL-R-22527.	3114
NUMBER OF CIRCUITS TO BE CHECKED (QUANTITY)	3116
TRANSIENTS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3120

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

3107 THE TRANSFER TIME NOT INCLUDING CONTACT BOUNCE SHALL BE NOT LESS THAN 3107 MILLISECOND(S).

3108 THE TRANSFER TIME NOT INCLUDING CONTACT BOUNCE SHALL BE NOT LESS THAN 3108 MICROSECOND(S).

3109 THE TRANSFER TIME NOT INCLUDING CONTACT BOUNCE SHALL BE NOT GREATER THAN 3109 MILLISECOND(S).

3110 THE TRANSFER TIME NOT INCLUDING CONTACT BOUNCE SHALL BE NOT GREATER THAN 3110 MICROSECOND(S).

3112 TRANSFER TIME. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3112.

3114 TRANSFER TIME. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-22527.

3116 THERE SHALL BE 3116 CIRCUIT(S) CHECKED.

3120 TRANSIENTS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3120.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TRANSIENTS (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	3122
MAXIMUM GENERATED VOLTAGE SPIKE (VOLTS)	3123
MAXIMUM DURATION OF OPENING OF CLOSED CONTACTS (MICROSECONDS)	3124
MAXIMUM DURATION OF CLOSING OF OPEN CONTACTS (MICROSECONDS)	3125
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3130
PER DOCUMENT (DOC DES)	3132
COIL TEST VOLTAGE (SELECT ONE)	
(PERCENT OF RATED)	3133
(VOLTS, AC)	3134
(VOLTS, DC)	3135

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3122	TRANSIENTS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3123	THE GENERATED SPIKE SHALL BE NOT GREATER THAN 3123 VOLT(S).
3124	THE DURATION OF OPENING OF CLOSED CONTACTS SHALL BE NOT GREATER THAN 3124 MICROSECONDS.
3125	THE DURATION OF CLOSING OF OPEN CONTACTS SHALL BE NOT GREATER THAN 3125 MICROSECONDS.
3130	TRANSIENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3130.
3132	TRANSIENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3132.
3133	THE COIL TEST VOLTAGE SHALL BE 3133 PERCENT OF THE RATED VOLTAGE.
3134	THE COIL TEST VOLTAGE SHALL BE 3134 VOLTS, AC.
3135	THE COIL TEST VOLTAGE SHALL BE 3135 VOLTS, DC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TRANSIENTS (CONT)	
PER DOCUMENT (CONT)	
MAXIMUM TURN-OFF VOLTAGE (SELECT ONE)	
(PERCENT OF RATED)	3136
(VOLTS, AC)	3137
(VOLTS, DC)	3138
VIBRATION, HIGH FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1455
NO EVIDENCE OF PHYSICAL DAMAGE.	1456
MINIMUM INSULATION RESISTANCE (MEGOHMS)	3140
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY DURING TEST.	3142
MAXIMUM DISCONTINUITY	
OPENING OF CLOSED CONTACTS (SELECT ONE)	
(MICROSECONDS)	3143
(MILLISECONDS)	3144

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3136	THE TURN-OFF VOLTAGE SHALL BE NOT GREATER THAN 3136 PERCENT OF THE RATED VOLTAGE.
3137	THE TURN-OFF VOLTAGE SHALL BE NOT GREATER THAN 3137 VOLTS, AC.
3138	THE TURN-OFF VOLTAGE SHALL BE NOT GREATER THAN 3138 VOLTS, DC.
1455	VIBRATION, HIGH FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1455.
1456	VIBRATION, HIGH FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
3140	THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 3140 MEGOHM(S).
3142	THERE SHALL BE NO DISCONTINUITY DURING TEST.
	MAXIMUM DISCONTINUITY SHALL BE AS FOLLOWS:
3143	OPENING OF CLOSED CONTACTS SHALL BE NOT GREATER THAN 3143 MICROSECOND(S).
3144	OPENING OF CLOSED CONTACTS SHALL BE NOT GREATER THAN 3144 MILLISECOND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, HIGH FREQUENCY (CONT)	
MAXIMUM DISCONTINUITY (CONT)	
CLOSING OF OPEN CONTACTS (SELECT ONE)	
(MICROSECONDS)	3145
(MILLISECONDS)	3346
OPENING OR CLOSING OF CONTACTS (SELECT ONE)	
(MICROSECONDS)	3147
(MILLISECONDS)	3148
REMAIN WITHIN THE FOLLOWING SPECIFIED TOLERANCES:	
CONTACT RESISTANCE/VOLTAGE DROP.	3149
DIELECTRIC WITHSTANDING VOLTAGE.	3150
PICKUP VOLTAGE OR CURRENT.	3151
DROPOUT VOLTAGE OR CURRENT.	3152
OPERATE AND RELEASE TIME.	3153
RECYCLE TIME.	3154
CONTACT BOUNCE.	3155
OTHER _____	3156

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3145	CLOSING OF OPEN CONTACTS SHALL BE NOT GREATER THAN 3145 MICROSECOND(S).
3146	CLOSING OF OPEN CONTACTS SHALL BE NOT GREATER THAN 3146 MILLISECOND(S).
3147	OPENING OR CLOSING OF CONTACTS SHALL BE NOT GREATER THAN 3147 MICROSECOND(S).
3148	OPENING OR CLOSING OF CONTACTS SHALL BE NOT GREATER THAN 3148 MILLISECOND(S).
	THE ITEM(S) SHALL REMAIN WITHIN THE FOLLOWING SPECIFIED TOLERANCES:
3149	CONTACT RESISTANCE/VOLTAGE DROP.
3150	DIELECTRIC WITHSTANDING VOLTAGE.
3151	PICKUP VOLTAGE OR CURRENT.
3152	DROPOUT VOLTAGE OR CURRENT.
3153	OPERATE AND RELEASE TIME.
3154	RECYCLE TIME.
3155	CONTACT BOUNCE.
3156	3156.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, HIGH FREQUENCY (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.	1552
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1446
PER MIL-STD-202, METHOD 204,	1447
*TEST CONDITION (LETTER)	1448
PERCENT RATED LOAD APPLIED (PERCENT)	6200
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4709
NORMAL MOUNTING METHOD.	4708
MOUNT PER DOCUMENT (DOC DES)	4707
OTHER _____	3158
METHOD OF DETERMINING MECHANICAL RESONANCE (SELECT ONE)	
VISUALLY BY MEANS OF A STROBOTAC.	1533
ELECTRICAL OUTPUT INDICATORS.	1534
OTHER _____	3160

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1552	NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.
1446	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1446.
1447	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 204 OF MIL-STD-202.
1448	TEST CONDITION LETTER 1448 SHALL APPLY.
6200	THE LOAD SHALL BE 6200 PERCENT OF THE RATED LOAD.
4709	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4708	MOUNTING SHALL BE BY THE NORMAL METHOD.
4707	MOUNTING SHALL BE IN ACCORDANCE WITH 4707.
3158	3158.
1533	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE VISUALLY BY MEANS OF A STROBOTAC.
1534	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE BY ELECTRICAL OUTPUT INDICATORS.
3160	METHOD FOR DETERMINING RESONANCE SHALL BE 3160.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, HIGH FREQUENCY (CONT)	
PER MIL-STD-202, METHOD 204. (CONT)	
MONITOR CONTACT CHATTER IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202.	
*TEST CIRCUIT (LETTER)	1442
*TEST CONDITION (LETTER)	1444
OPEN CONTACTS SHALL BE WIRED _____	3161
CLOSED CONTACTS SHALL BE WIRED _____	3162
ELECTRICAL LOAD CONDITIONS	
DURATION COIL IS ENERGIZED (SELECT ONE)	
(HOURS)	3163
(MINUTES)	3164
DURATION COIL IS DEENERGIZED (SELECT ONE)	
(HOURS)	3165
(MINUTES)	3166
TEST TEMPERATURE (DEGREES CELSIUS)	3167

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1442	MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1442 SHALL APPLY.
1444	TEST CONDITION LETTER 1444 OF METHOD 310 OF MIL-STD-202 SHALL APPLY.
3161	OPEN CONTACTS SHALL BE WIRED 3161.
3162	CLOSED CONTACTS SHALL BE WIRED 3162.
3163	THE COIL SHALL BE ENERGIZED FOR 3163 HOUR(S).
3164	THE COIL SHALL BE ENERGIZED FOR 3164 MINUTE(S).
3165	THE COIL SHALL BE DEENERGIZED FOR 3165 HOUR(S).
3166	THE COIL SHALL BE DEENERGIZED FOR 3166 MINUTE(S).
3167	THE TEST TEMPERATURE SHALL BE 3167 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, HIGH FREQUENCY (CONT)	
PER MIL-STD-202, METHOD 204. (CONT)	
TEST DURATION AT RESONANT FREQUENCY	
(CYCLES)	3168
(HOURS)	3169
(MINUTES)	3170
VIBRATION SCAN	
TEST CONDITION LETTER (LETTER)	3171
NUMBER OF CYCLES (QUANTITY)	3172
THE CYCLES SHALL CONSIST OF ____	3173
VIBRATION, LOW FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1475
NO EVIDENCE OF PHYSICAL DAMAGE.	1476
MINIMUM INSULATION RESISTANCE (MEGOHMS)	3180

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

3168 THE TEST DURATION AT THE RESONANT FREQUENCY SHALL BE 3168 CYCLES.

3169 THE TEST DURATION AT THE RESONANT FREQUENCY SHALL BE 3169 HOUR(S).

3170 THE TEST DURATION AT THE RESONANT FREQUENCY SHALL BE 3170 MINUTE(S).

3171 THE VIBRATION SCAN SHALL BE PER TEST CONDITION LETTER 3171.

3172 THERE SHALL BE 3172 CYCLE(S).

3173 THE CYCLES SHALL CONSIST OF 3173.

1475 VIBRATION, LOW FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1475.

1476 VIBRATION, LOW FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

3180 THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 3180 MEGOHM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY DURING TEST.	1490
MAXIMUM DISCONTINUITY	
OPENING OF CLOSED CONTACTS (SELECT ONE)	
(MICROSECONDS)	3181
(MILLISECONDS)	3182
CLOSING OF OPEN CONTACTS (SELECT ONE)	
(MICROSECONDS)	3183
(MILLISECONDS)	3184
OPENING OR CLOSING OF CONTACTS (SELECT ONE)	
(MICROSECONDS)	3185
(MILLISECONDS)	3186

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1490 THERE SHALL BE NO DISCONTINUITY DURING TEST.

MAXIMUM DISCONTINUITY SHALL BE AS FOLLOWS:

3181 OPENING OF CLOSED CONTACTS SHALL BE NOT GREATER THAN 3181 MICROSECOND(S).

3182 OPENING OF CLOSED CONTACTS SHALL BE NOT GREATER THAN 3182 MILLISECOND(S).

3183 CLOSING OF OPEN CONTACTS SHALL BE NOT GREATER THAN 3183 MICROSECOND(S).

3184 CLOSING OF OPEN CONTACTS SHALL BE NOT GREATER THAN 31184 MILLISECOND(S).

3185 OPENING OR CLOSING OF CONTACTS SHALL BE NOT GREATER THAN 3185 MICROSECOND(S),

3186 OPENING OR CLOSING OF CONTACTS SHALL BE NOT GREATER THAN 3186 MILLISECOND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
REMAIN WITHIN THE FOLLOWING SPECIFIED TOLERANCES:	
CONTACT RESISTANCE/VOLTAGE DROP.	3187
DIELECTRIC WITHSTANDING VOLTAGE.	3188
PICKUP VOLTAGE OR CURRENT.	3189
DROPOUT VOLTAGE OR CURRENT.	3190
OPERATE AND RELEASE TIME.	3191
RECYCLE TIME.	3192
CONTACT BOUNCE.	3193
OTHER _____	3194
NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.	1553
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1466
PER MIL-STD-202, METHOD 210.	1467
DURATION OF VIBRATION PER AXIS (HOURS)	1470

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

THE ITEM(S) SHALL REMAIN WITHIN THE FOLLOWING SPECIFIED TOLERANCES:

3187 CONTACT RESISTANCE/VOLTAGE DROP.

3188 DIELECTRIC WITHSTANDING VOLTAGE.

3189 PICKUP VOLTAGE OR CURRENT.

3190 DROPOUT VOLTAGE OR CURRENT.

3191 OPERATE AND RELEASE TIME.

3192 RECYCLE TIME.

3193 CONTACT BOUNCE.

3194 3194.

1553 NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.

1466 VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT ~~1466.~~

1467 VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 201 OF MIL-STD-202.

1470 DURATION OF TEST SHALL BE 1470 HOUR(S) PER AXIS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY (CONT)	
PER MIL-STD-202, METHOD 210. (CONT)	
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4731
NORMAL MOUNTING METHOD.	4730
MOUNT PER DOCUMENT (DOC DES)	4729
OTHER ____	3200
DIRECTION OF MOTION (SELECT ONE)	
PARALLEL TO LONGITUDINAL AXIS.	1535
PERPENDICULAR TO LONGITUDINAL AXIS.	1536
ON THE CENTERLINE OF MOST SENSITIVE AXIS.	4979
90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.	4978
THREE MUTUALLY PERPENDICULAR DIRECTIONS.	1537
OTHER ____	3201

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4731	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4730	MOUNTING SHALL BE BY THE NORMAL METHOD.
4729	MOUNTING SHALL BE IN ACCORDANCE WITH 4729.
3200	MOUNTING SHALL BE 3200.
1535	THE DIRECTION OF MOTION SHALL BE PARALLEL TO THE LONGITUDINAL AXIS.
1536	THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE LONGITUDINAL AXIS.
4979	THE DIRECTION OF MOTION SHALL BE ON THE CENTERLINE OF THE MOST SENSITIVE AXIS.
4978	THE DIRECTION OF MOTION SHALL BE 90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.
1537	THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUALLY PERPENDICULAR DIRECTIONS.
3201	3201.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY (CONT)	
PER MIL-STD-202, METHOD 210. (CONT)	
MONITOR CONTACT CHATTER IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202.	
*TEST CIRCUIT (LETTER)	1491
*TEST CONDITION (LETTER)	1492
OPEN CONTACTS SHALL BE WIRED _____	3202
CLOSED CONTACTS SHALL BE WIRED _____	3203
PERCENT RATED LOAD APPLIED (PERCENT)	6201
ELECTRICAL LOAD CONDITIONS	
DURATION COIL IS ENERGIZED (SELECT ONE)	
(HOURS)	3204
(MINUTES)	3205
DURATION COIL IS DEENERGIZED (SELECT ONE)	
(HOURS)	3206
(MINUTES)	3207
TEST TEMPERATURE (DEGREES CELSIUS)	3208

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1491	MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1491 SHALL APPLY.
1492	TEST CONDITION LETTER 1492 OF METHOD 310 OF MIL-STD-202 SHALL APPLY.
3202	OPEN CONTACTS SHALL BE WIRED 3202.
3203	CLOSED CONTACTS SHALL BE WIRED 3203.
6201	THE LOAD SHALL BE 6201 PERCENT OF THE RATED LOAD.
3204	THE COIL SHALL BE ENERGIZED FOR 3204 HOUR(S).
3205	THE COIL SHALL BE ENERGIZED FOR 3205 MINUTE(S).
3206	THE COIL SHALL BE DEENERGIZED FOR 3206 HOUR(S).
3207	THE COIL SHALL BE DEENERGIZED FOR 3207 MINUTE(S).
3208	THE TEST TEMPERATURE SHALL BE 3208 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1435
NO EVIDENCE OF PHYSICAL DAMAGE.	1436
MINIMUM INSULATION RESISTANCE (MEGOHMS)	3210
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY DURING TEST.	1374
MAXIMUM DISCONTINUITY	
OPENING OF CLOSED CONTACTS (SELECT ONE)	
(MICROSECONDS)	3212
(MILLISECONDS)	3213
CLOSING OF OPEN CONTACTS (SELECT ONE)	
(MICROSECONDS)	3214
(MILLISECONDS)	3215

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1435 VIBRATION, RANDOM. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1435.

1436 VIBRATION, RANDOM. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

3210 THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 3210 MEGOHM(S).

1374 THERE SHALL BE NO DISCONTINUITY DURING TEST.

MAXIMUM DISCONTINUITY SHALL BE AS FOLLOWS:

3212 OPENING OF CLOSED CONTACTS SHALL BE NOT GREATER THAN 3212 MICROSECOND(S).

3213 OPENING OF CLOSED CONTACTS SHALL BE NOT GREATER THAN 3213 MILLISECOND(S).

3214 CLOSING OF OPEN CONTACTS SHALL BE NOT GREATER THAN 3214 MICROSECOND(S).

3215 CLOSING OF OPEN CONTACTS SHALL BE NOT GREATER THAN 3215 MILLISECOND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
MAXIMUM DISCONTINUITY (CONT)	
OPENING OR CLOSING OF CONTACTS (SELECT ONE)	
(MICROSECONDS)	3216
(MILLISECONDS)	3217
REMAIN WITHIN THE FOLLOWING SPECIFIED TOLERANCES:	
CONTACT RESISTANCE/VOLTAGE DROP.	3220
DIELECTRIC WITHSTANDING VOLTAGE.	3221
PICKUP VOLTAGE OR CURRENT.	3222
DROPOUT VOLTAGE OR CURRENT.	3223
OPERATE AND RELEASE TIME.	3224
RECYCLE TIME.	3225
CONTACT BOUNCE.	3226
OTHER _____	3227
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

3216 OPENING OR CLOSING OF CONTACTS SHALL BE NOT GREATER THAN 3216 MICROSECOND(S).

3217 OPENING OR CLOSING OF CONTACTS SHALL BE NOT GREATER THAN 3217 MILLISECOND(S).

THE ITEM(S) SHALL REMAIN WITHIN THE FOLLOWING SPECIFIED TOLERANCES:

3220 CONTACT RESISTANCE/VOLTAGE DROP.

3221 DIELECTRIC WITHSTANDING VOLTAGE.

3222 PICKUP VOLTAGE OR CURRENT.

3223 DROPOUT VOLTAGE OR CURRENT.

3224 OPERATE AND RELEASE TIME.

3225 RECYCLE TIME.

3226 CONTACT BOUNCE.

3227 3227.

1426 VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1426.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 214.	1427
*TEST CONDITION (ROMAN NUMERAL AND LETTER)	1428
*DURATION OF APPLICATION (SELECT ONE)	
(MINUTES)	1438
(HOURS)	1431
MONITORING INSTRUMENTATION OF EXCITATION (SELECT ONE)	
ANY SUITABLE SYSTEM.	1452
CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.	1453
CALIBRATED OSCILLOSCOPE.	1459
NUMBER OF VIBRATION MONITORING TEST POINTS (QUANTITY)	1430
LOCATION OF MONITORING POINTS (SELECT ONE)	
ANY SUITABLE LOCATION.	1439
AS CLOSE AS PRACTICAL TO TEST SPECIMEN.	1462

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1427 VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 214 OF MIL-STD-202.

1428 TEST CONDITION NUMBER AND LETTER 3428 SHALL APPLY.

1438 THE DURATION OF THE TEST SHALL BE 1438 MINUTE(S).

1431 THE DURATION OF THE TEST SHALL BE 1431 HOUR(S).

1452 THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE ANY SUITABLE INSTRUMENTATION SYSTEM.

1453 THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.

1459 THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED OSCILLOSCOPE.

1430 THERE SHALL BE 1430 VIBRATION MONITORING POINT(S).

1439 THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE ANY SUITABLE LOCATION.

1462 THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE AS CLOSE AS PRACTICAL TO THE TEST SPECIMEN(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
PER MIL-STD-202, METHOD 214. (CONT)	
MONITOR CONTACT CHATTER IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202.	
*TEST CIRCUIT (LETTER)	1402
*TEST CONDITION (LETTER)	1382
OPEN CONTACTS SHALL BE WIRED ____	3230
CLOSED CONTACTS SHALL BE WIRED ____	3231
PERCENT OF RATED LOAD APPLIED (PERCENT)	4678
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4977
NORMAL MOUNTING METHOD.	4976
MOUNT PER DOCUMENT (DOC DES)	4975
OTHER ____	3232
ELECTRICAL LOAD CONDITIONS	
DURATION COIL IS ENERGIZED (SELECT ONE)	
(HOURS)	3233
(MINUTES)	3234

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3402	MONITORING DURING THE TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1402 SHALL APPLY.
1382	TEST CONDITION LETTER 1382 IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202 SHALL APPLY.
3230	OPEN CONTACTS SHALL BE WIRED 3230.
32311	CLOSED CONTACTS SHALL BE WIRED 3231.
4678	THE LOAD SHALL BE 4678 PERCENT OF THE RATED LOAD.
4977	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4976	MOUNTING SHALL BE BY THE NORMAL METHOD.
4975	MOUNTING SHALL BE IN ACCORDANCE WITH 49750
3232	MOUNTING SHALL BE 3232.
3233	THE COIL SHALL BE ENERGIZED FOR 3233 HOUR(S).
3234	THE COIL SHALL BE ENERGIZED FOR 3234 MINUTE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
ELECTRICAL LOAD CONDITIONS (CONT)	
DURATION COIL IS DEENERGIZED (SELECT ONE)	
(HOURS)	3235
(MINUTES)	3236
TEST TEMPERATURE (DEGREES CELSIUS)	3237
WATERPROOFNESS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3240
NO EVIDENCE OF WATER LEAKAGE.	3242
NO CHANGE IN DIELECTRIC WITHSTANDING VOLTAGE REQUIREMENTS.	3244
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3250
PER MIL-E-13856.	3252

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3235	THE COIL SHALL BE DEENERGIZED FOR 3235 HOUR(S).
3236	THE COIL SHALL BE DEENERGIZED FOR 3236 MINUTE(S).
3237	THE TEST TEMPERATURE SHALL BE 3237 DEGREES CELSIUS.
3240	WATERPROOFNESS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3240.
3242	WATERPROOFNESS. THERE SHALL BE NO EVIDENCE OF WATER LEAKAGE.
3244	THERE SHALL BE NO CHANGE IN DIELECTRIC WITHSTANDING VOLTAGE REQUIREMENTS.
3250	WATERPROOFNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3250.
3252	WATERPROOFNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-E-13856.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WATERPROOFNESS (CONT)	
PER MIL-E-13856. (CONT)	
TYPE (SELECT ONE)	
I.	3253
II.	3254
CLASS (SELECT ONE)	
1.	3255
2.	3256
3.	3257
4.	3258
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A_____	7001
B_____	7002
C_____	7003
D_____	7004
E_____	7005

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

3253 THE SWITCH SHALL BE CLASSIFIED AS TYPE I.

3254 THE SWITCH SHALL BE CLASSIFIED AS TYPE II.

3255 THE SWITCH SHALL BE CLASSIFIED AS CLASS 1.

3256 THE SWITCH SHALL BE CLASSIFIED AS CLASS 2.

3257 THE SWITCH SHALL BE CLASSIFIED AS CLASS 3.

3258 THE SWITCH SHALL BE CLASSIFIED AS CLASS 4.

MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.

6870 WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.

ADDITIONAL REQUIREMENTS.

7001 (A) 7001.

7002 (B) 7002.

7003 (C) 7003.

7004 (D) 7004.

7005 (E) 70050

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629
ADDITIONAL PART MARKING	
A_____	6991
B_____	6992
C_____	6993
D_____	6994
E_____	6995
DEFINITION OF HERMETIC SEALING	
NOTE: AUTOMATIC WHEN CODE 1614 IS USED TO REQUIRE HERMETIC SEALING.	
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994. .
6995	(E) 6995.

DEFINITION OF HERMETIC SEALING. FOR THE PURPOSE OF THIS DOCUMENT, A HERMETICALLY-SEALED ITEM IS ONE IN WHICH THE ELEMENT IS CONTAINED WITHIN A SEALED ENCLOSURE OR CERAMIC, GLASS OR METAL, OR A COMBINATION THEREOF, WHERE SEALING IS ACCOMPLISHED BY MATERIAL FUSION, WELDING, BRAZING OR SOLDERING.

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI

(Project EDS-A249)


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX A


ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

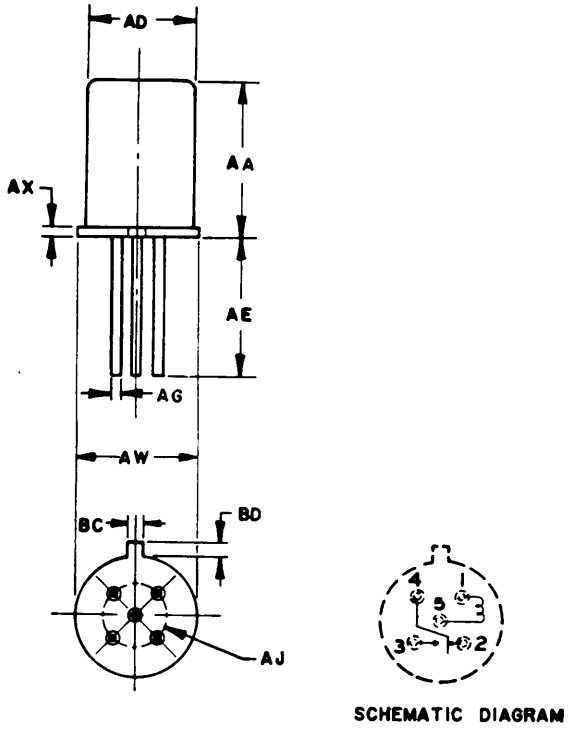

SCHEMATIC DIAGRAM


022-01-1

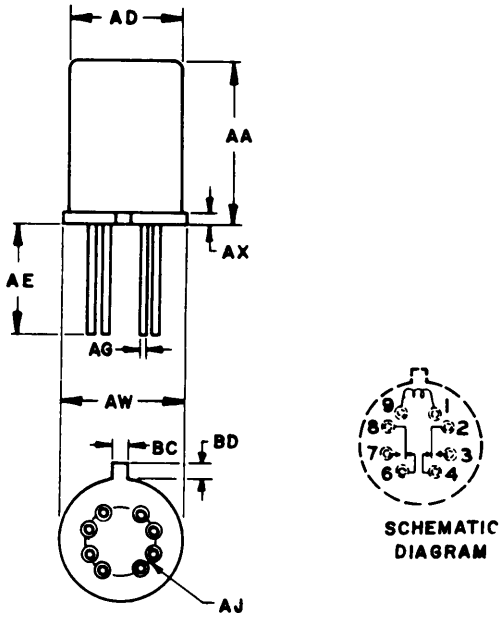


SCHEMATIC DIAGRAM

022-01-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

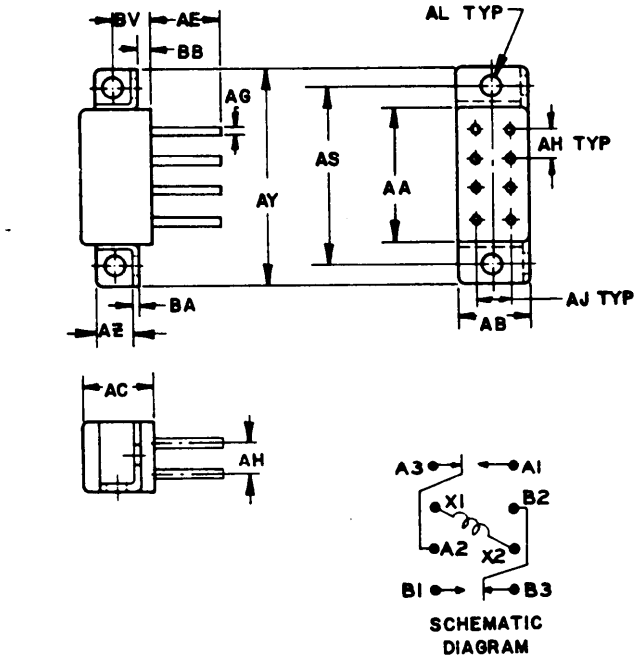


022-01-3

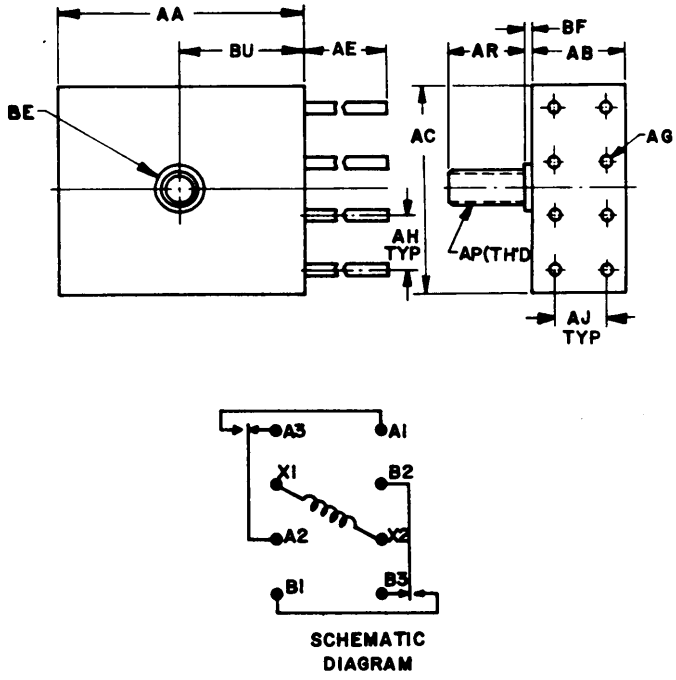


022-01-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

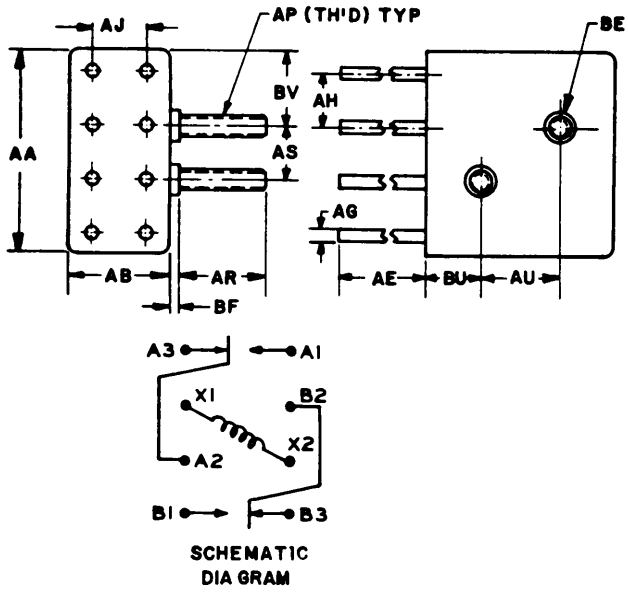



022-01-5

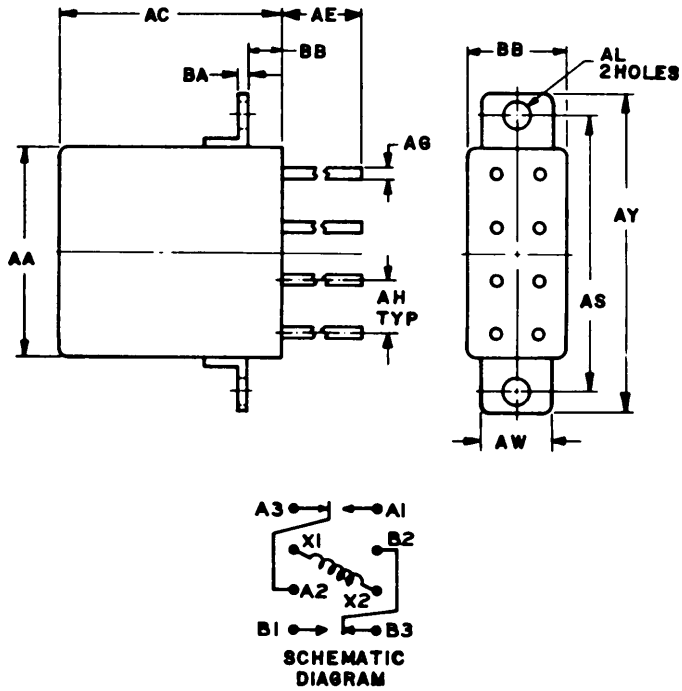

022-01-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

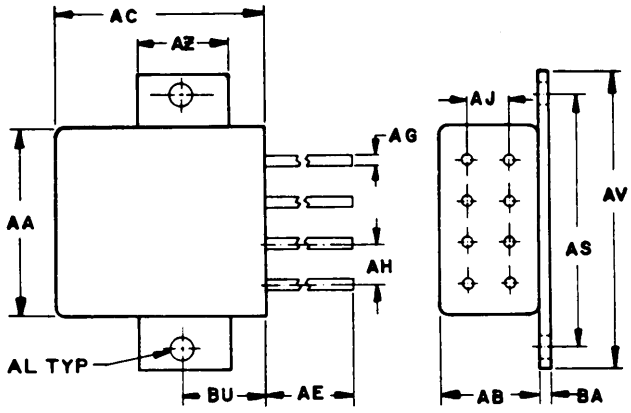





SCHEMATIC DIAGRAM

022-01-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

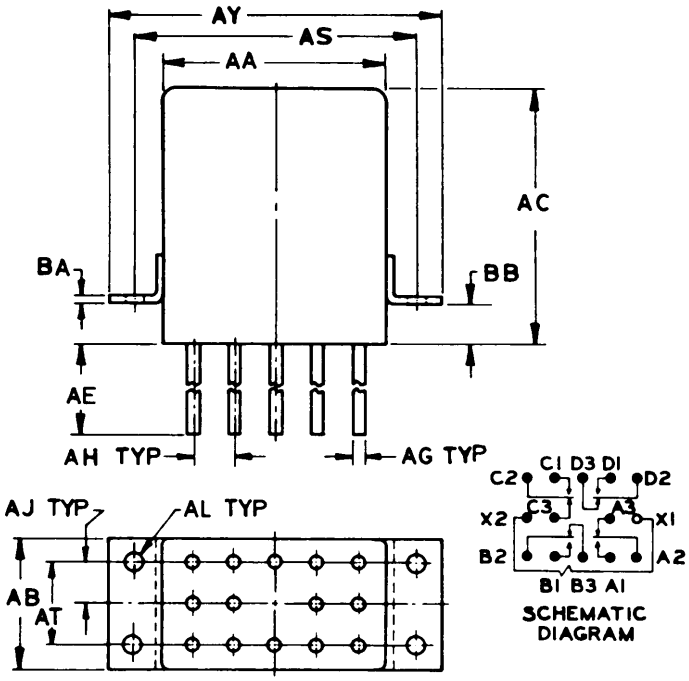


022-01-8

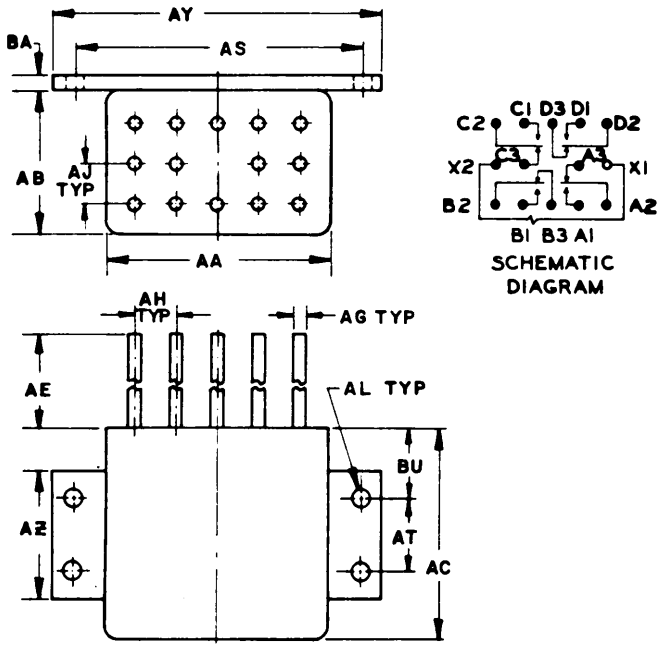


022-01-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

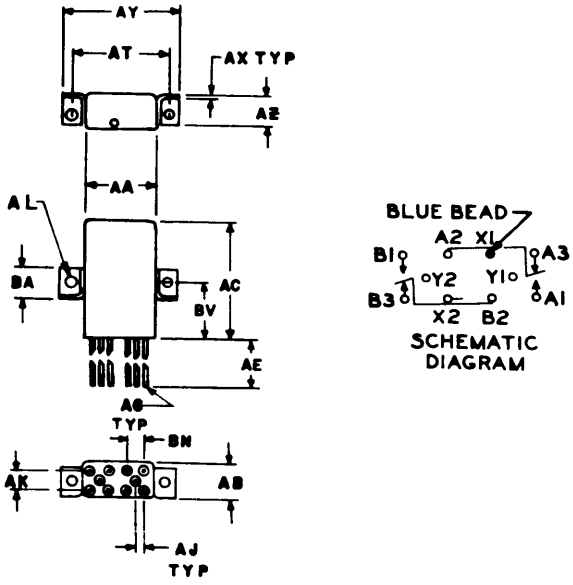


022-01-10

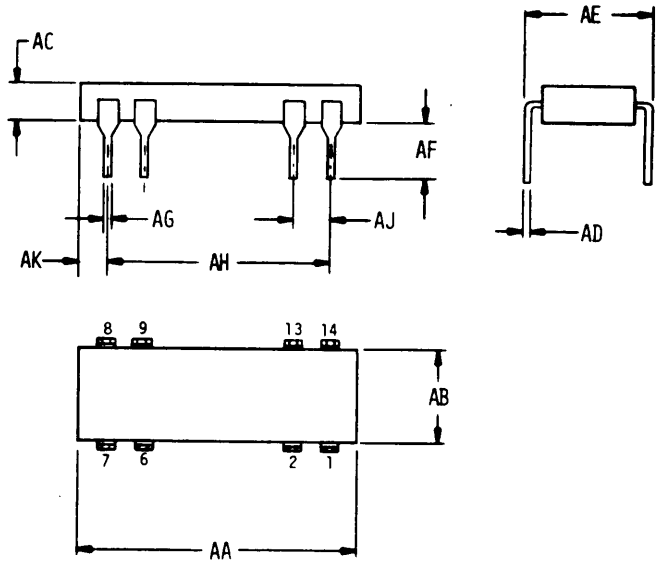


022-01-11


Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:23Z
Check the source to verify that this is the currentversion before use.

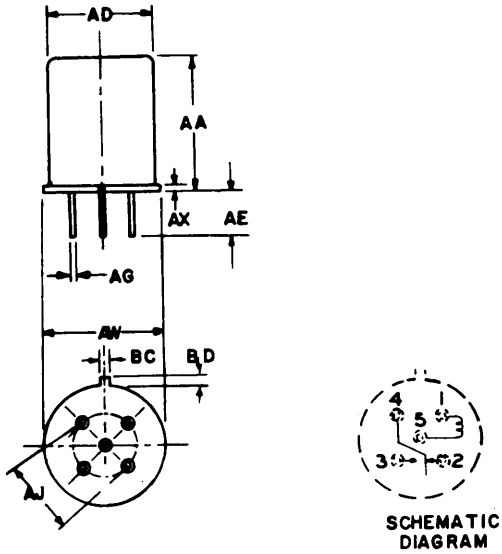


022-02-1

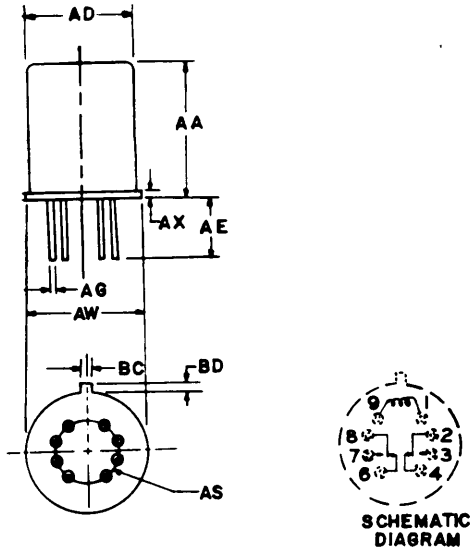

022-02-2

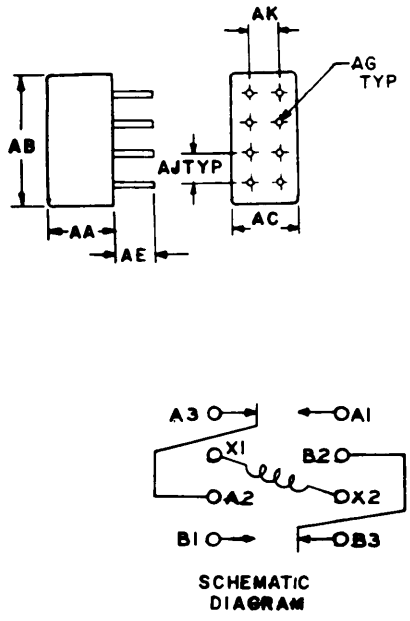


022-02-3

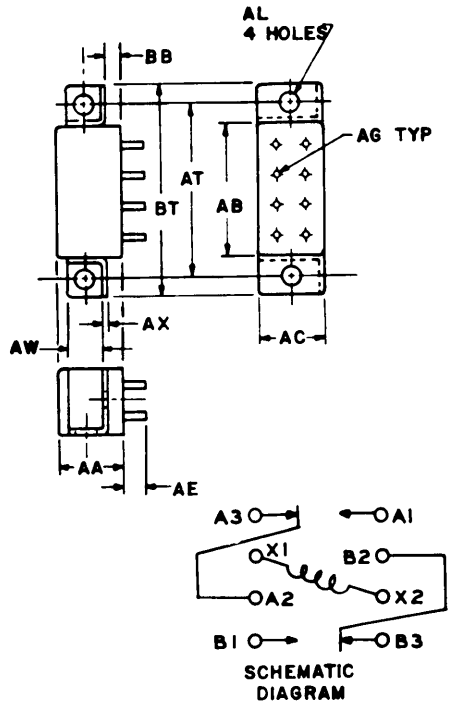


022-02-4


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

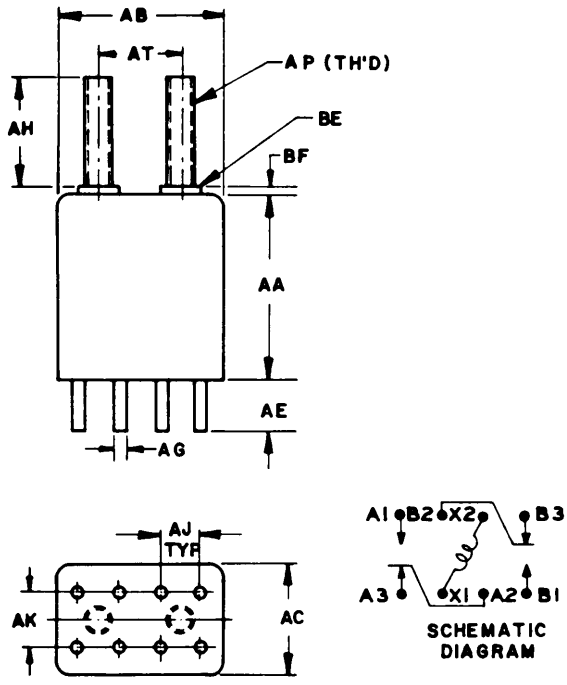


022-02-5

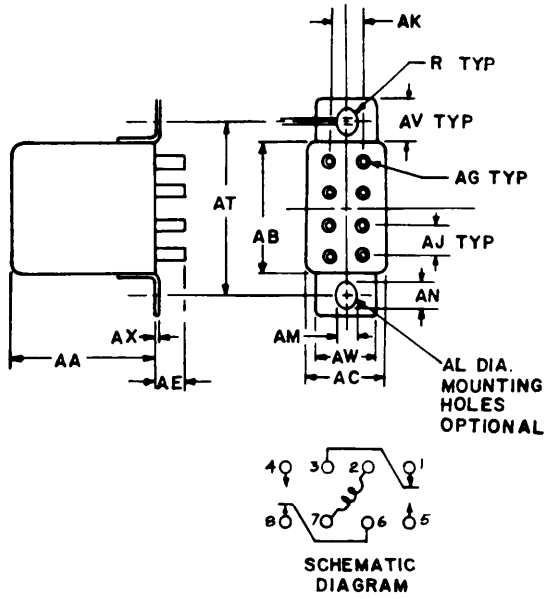


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

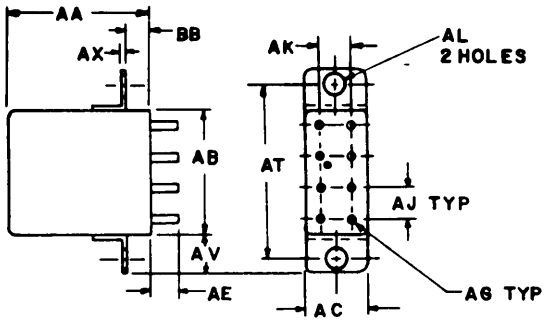

022-02-7

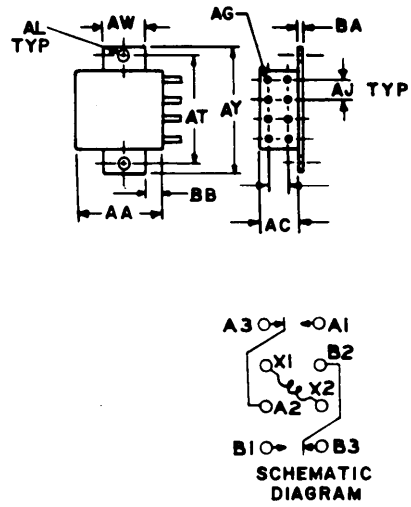


022-02-8

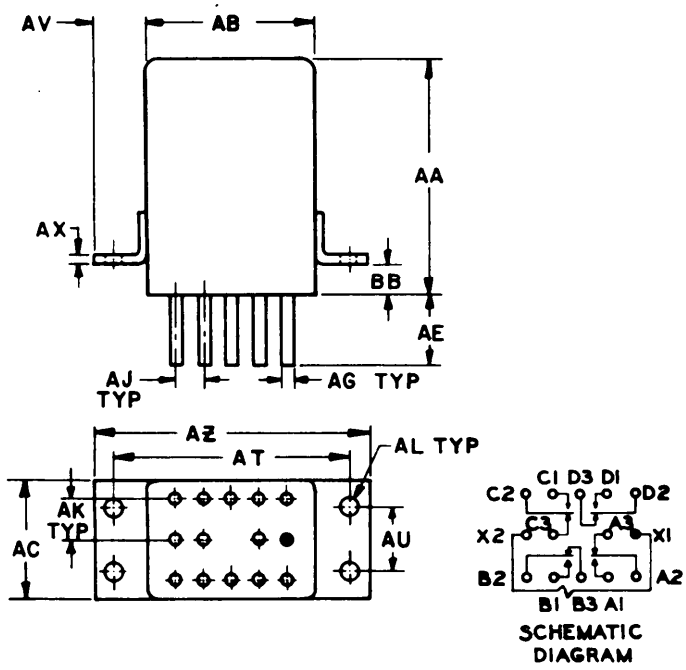


022-02-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

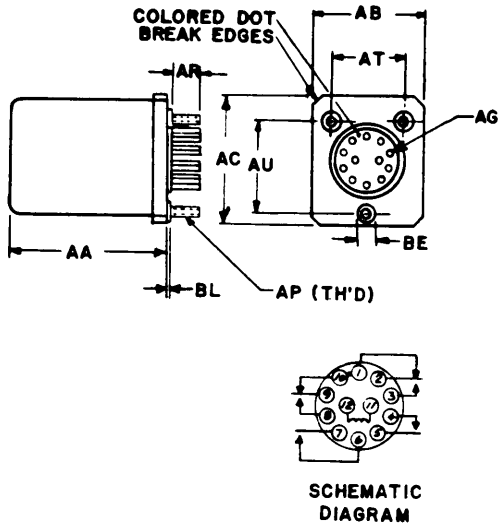


022-02-10

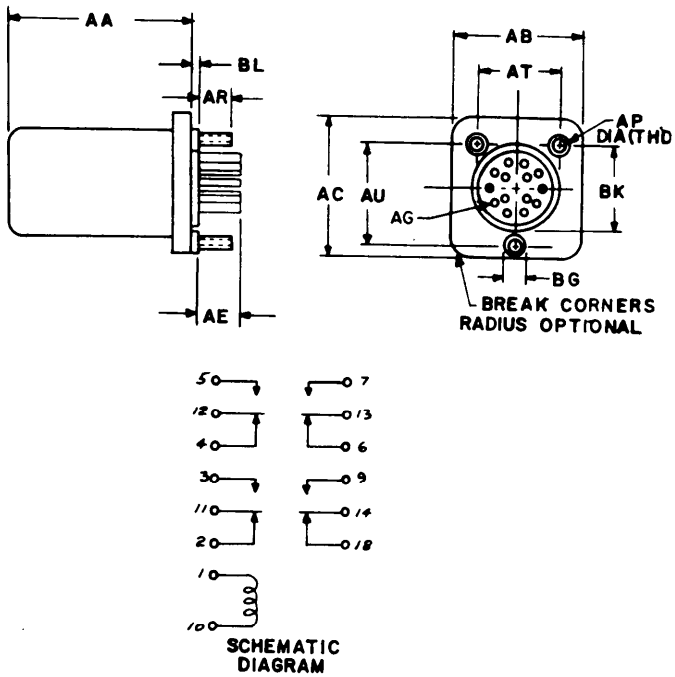


022-02-11

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

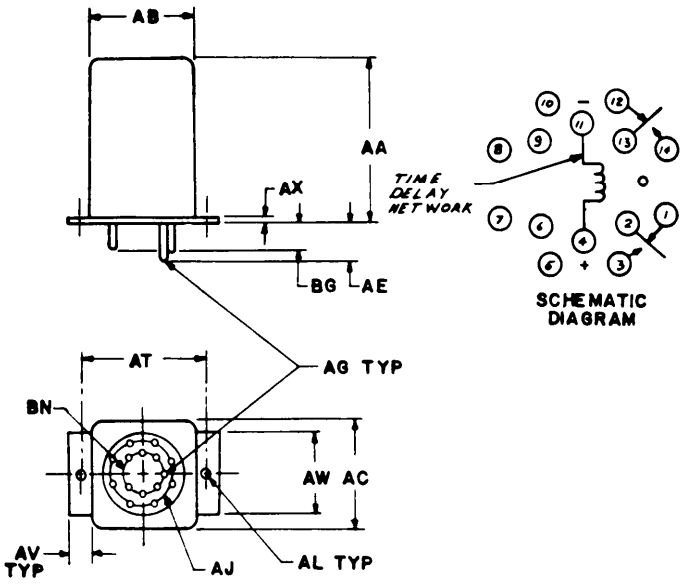


022-02-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

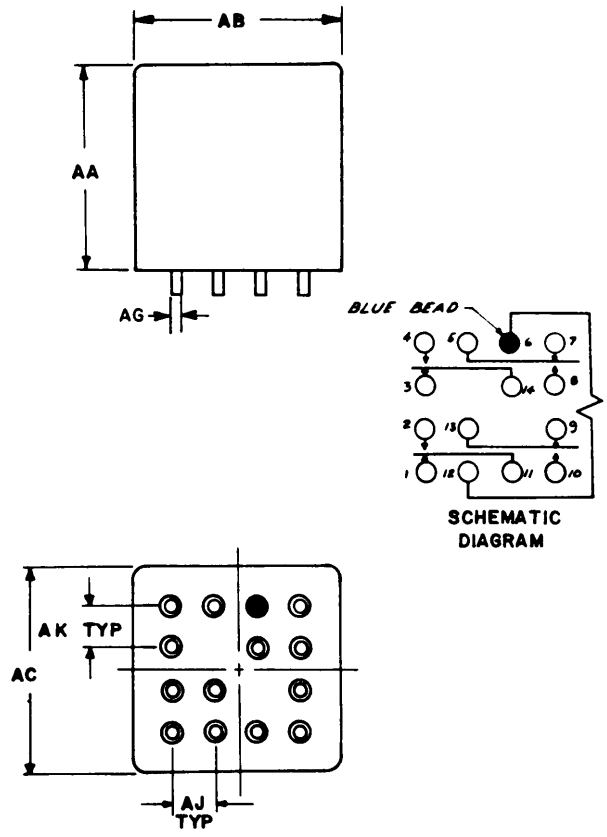


022-02-13

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

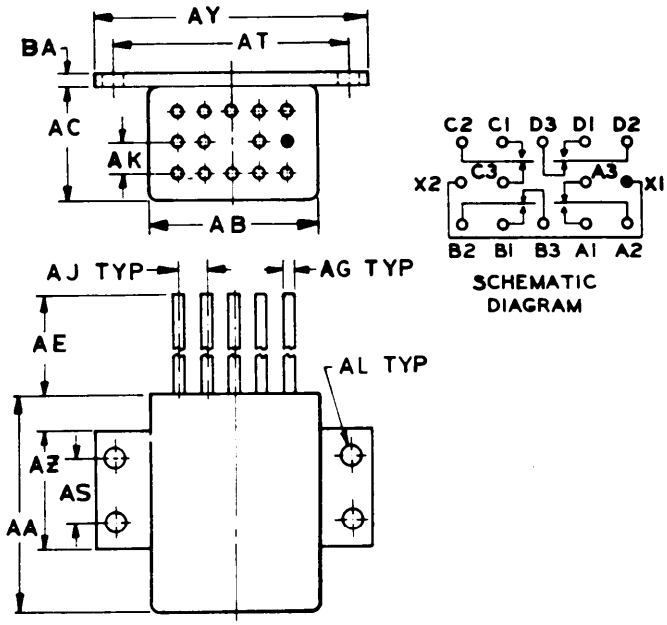


022-02-14

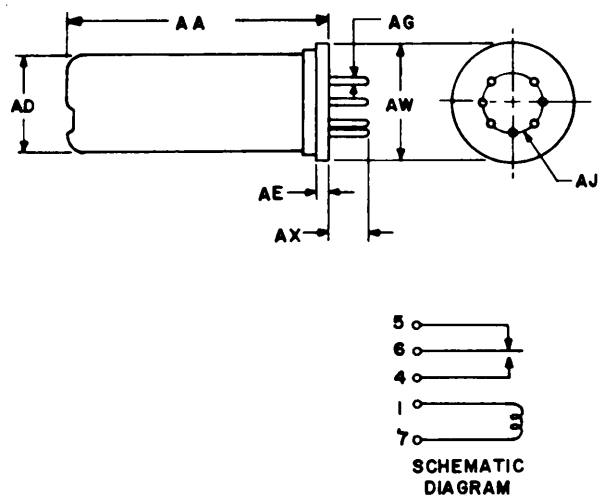


022-02-15


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

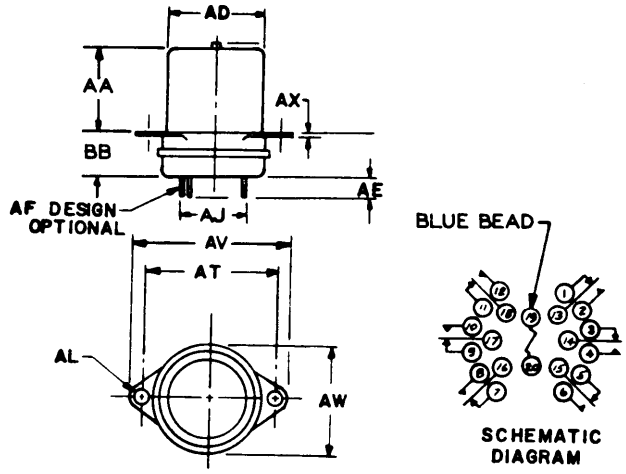

022-02-16

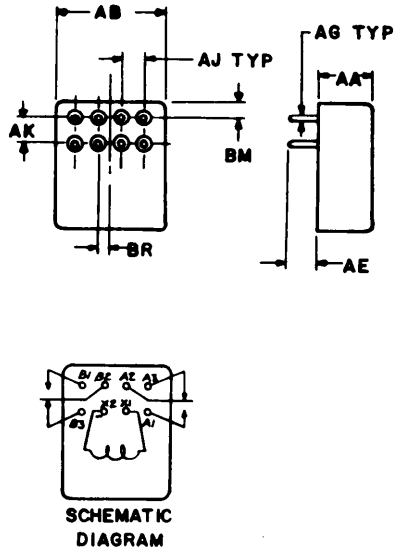


022-02-17

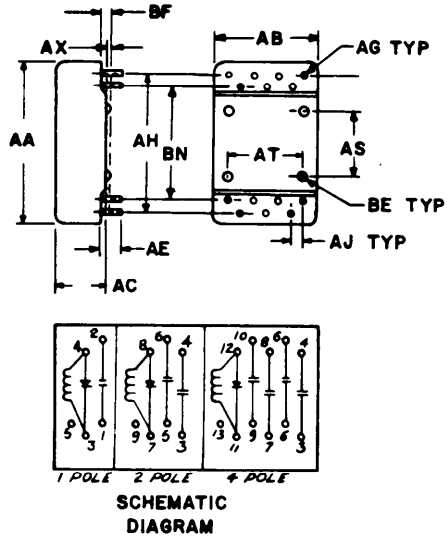


022-02-18


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

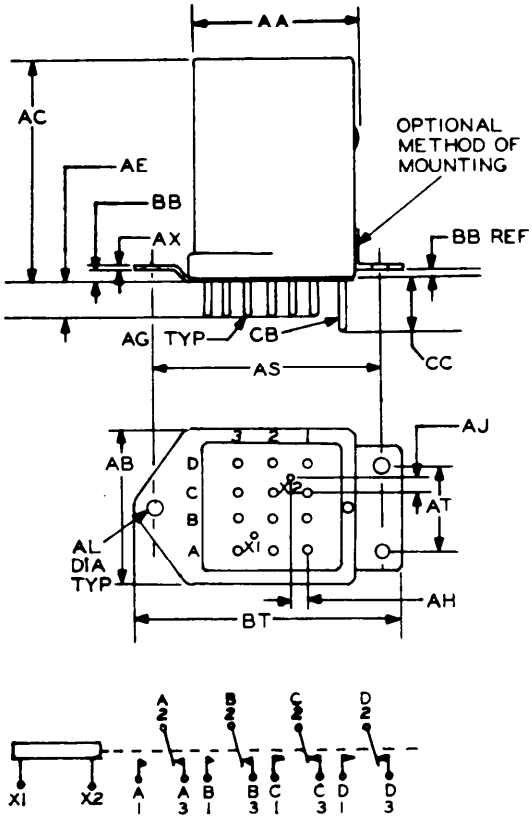


022-02-19

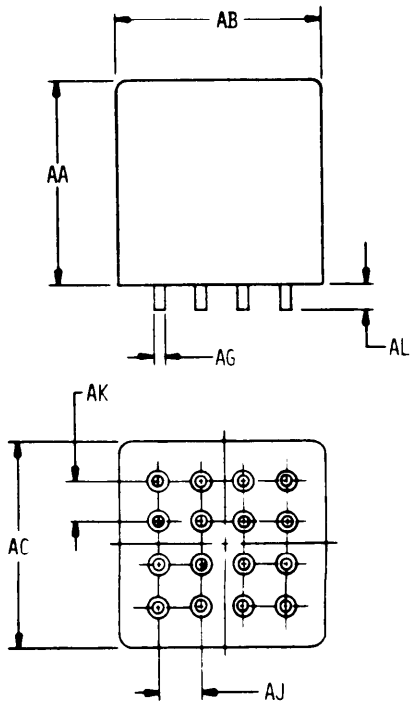

022-02-20

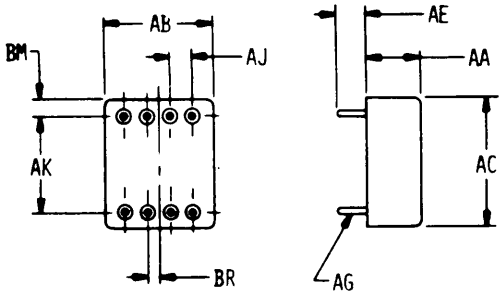


022-02-21

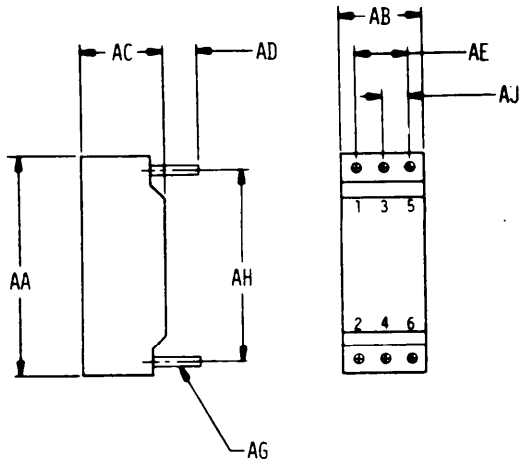


022-02-22


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

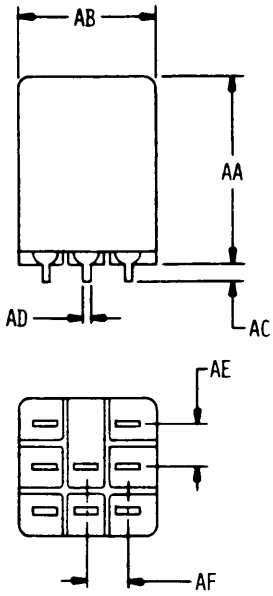


Ø22-Ø2-23

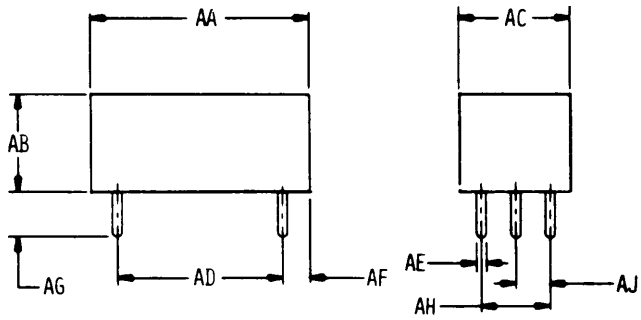

Ø22-Ø2-24

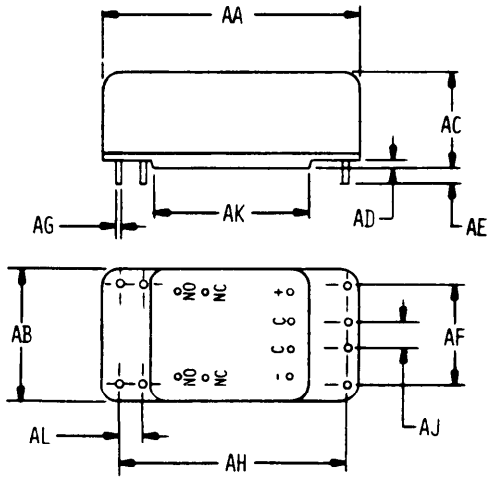


Ø22-Ø2-25

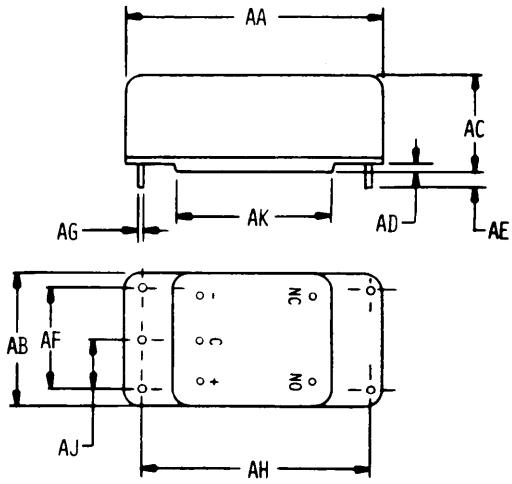


Ø22-Ø2-26


Source: https://assist.dla.mil -- Downloaded: 2026Ø1Ø-26T07:23Z
Check the source to verify that this is the current version before use.

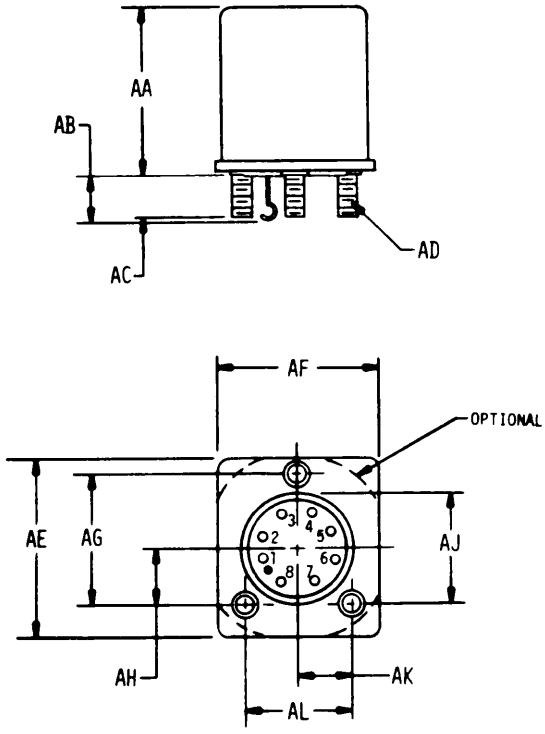


022-02-27

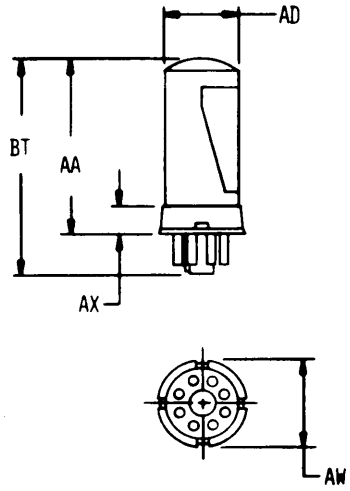

022-02-28

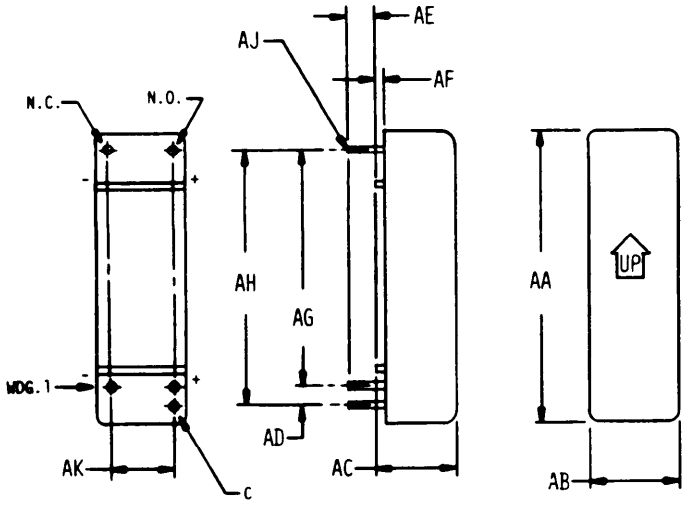


022-02-29

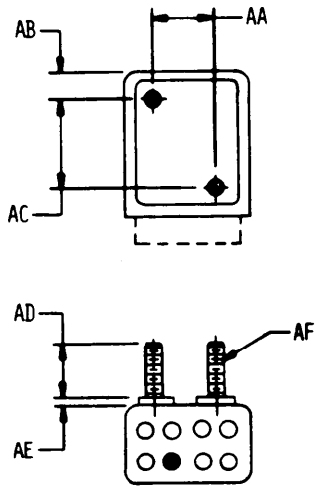


022-02-30


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

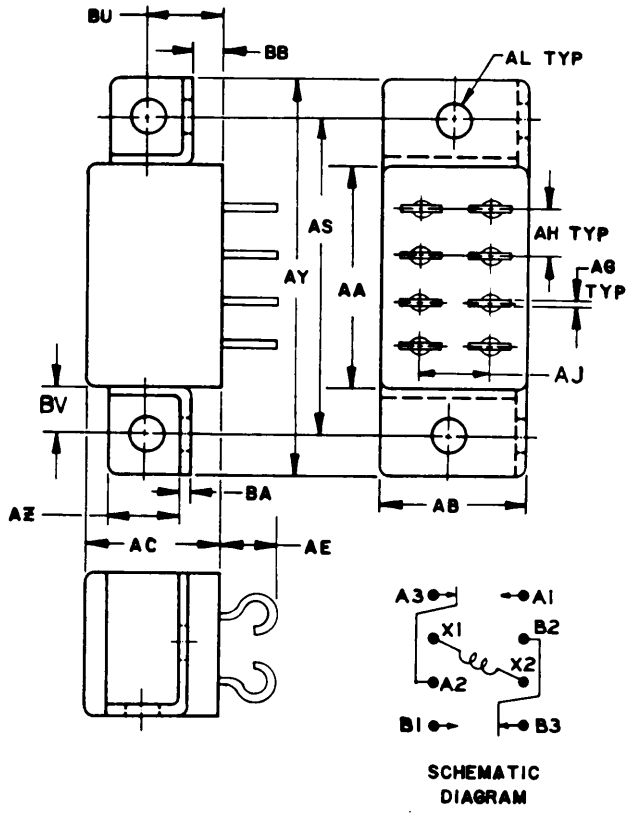

022-03-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

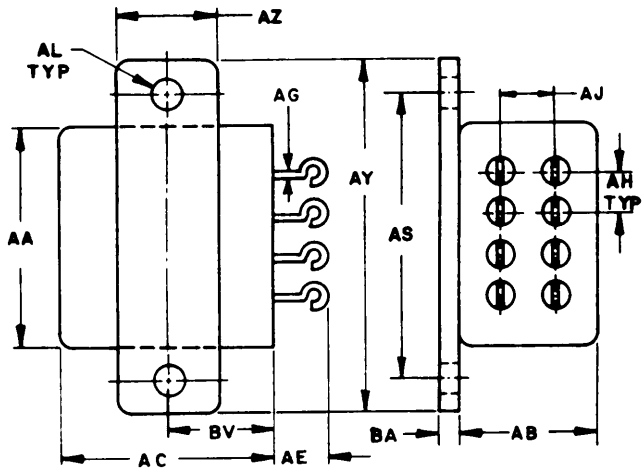





SCHEMATIC DIAGRAM

022-03-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

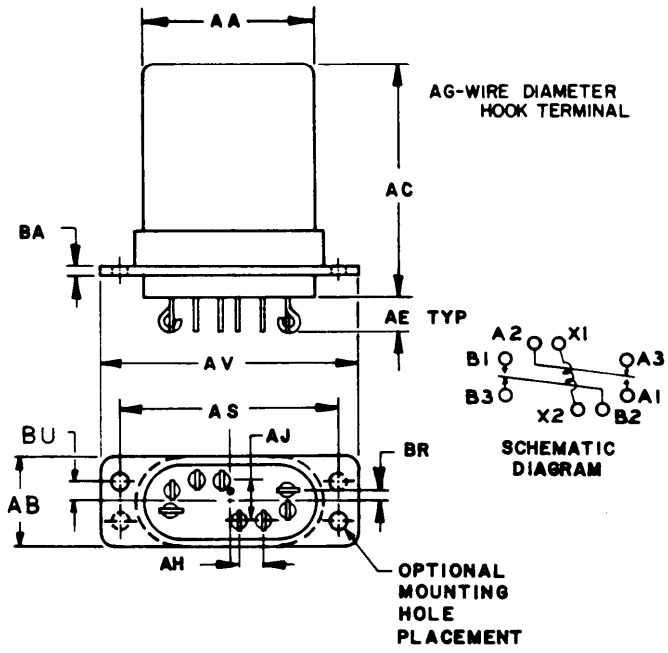


022-03-3

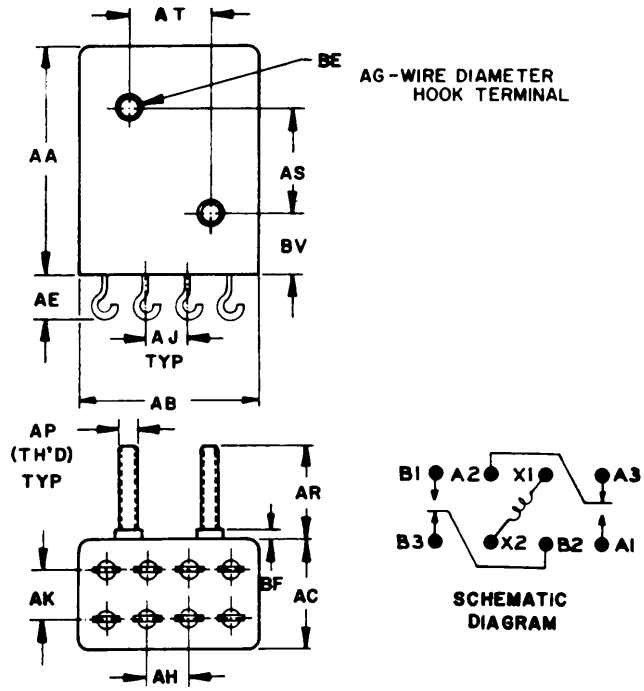


022-03-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

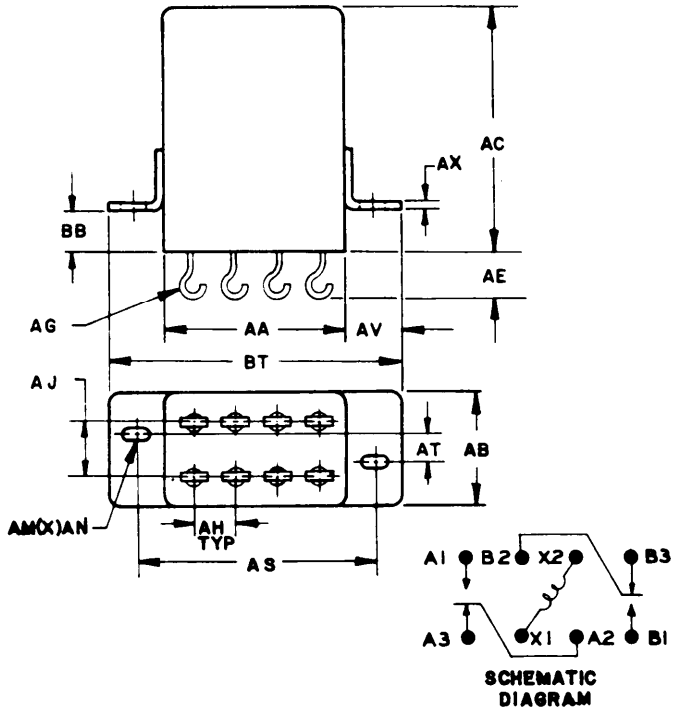


022-03-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

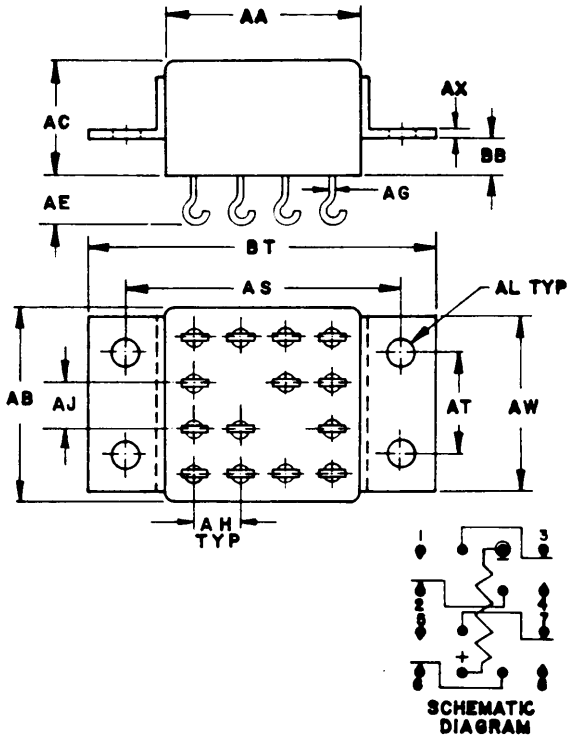


022-03-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

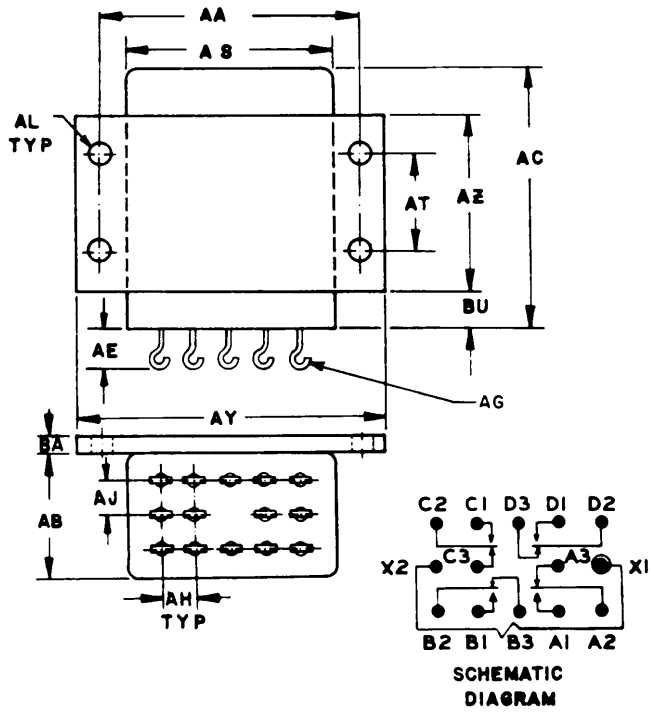


022-03-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

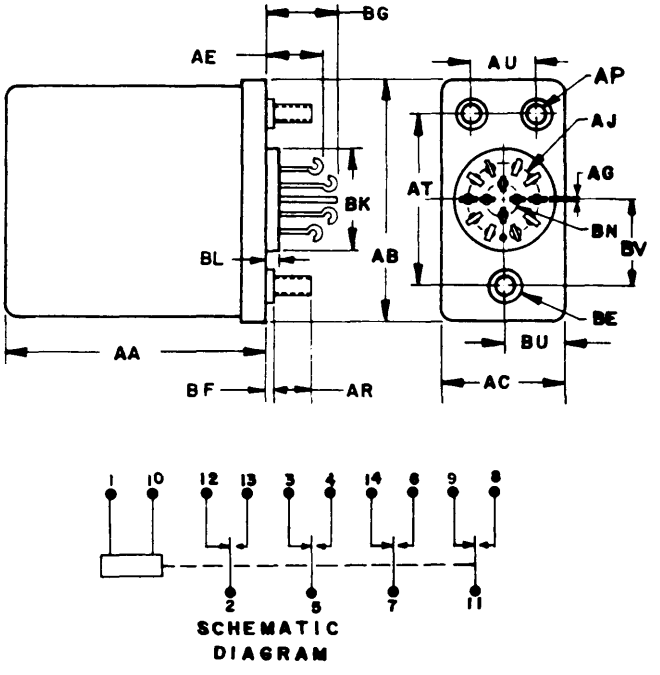


022-03-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

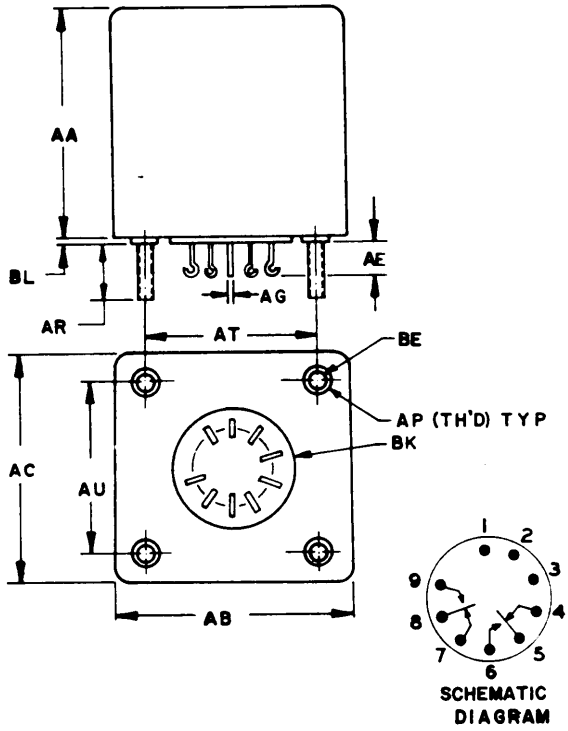


022-03-9

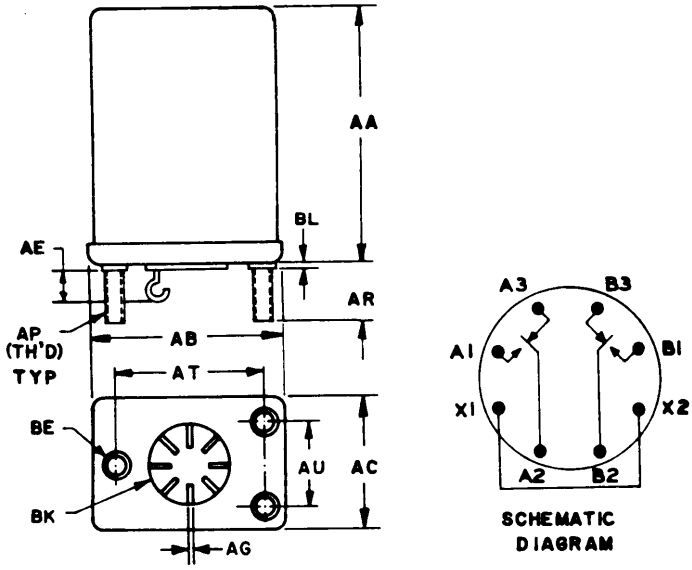


022-03-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

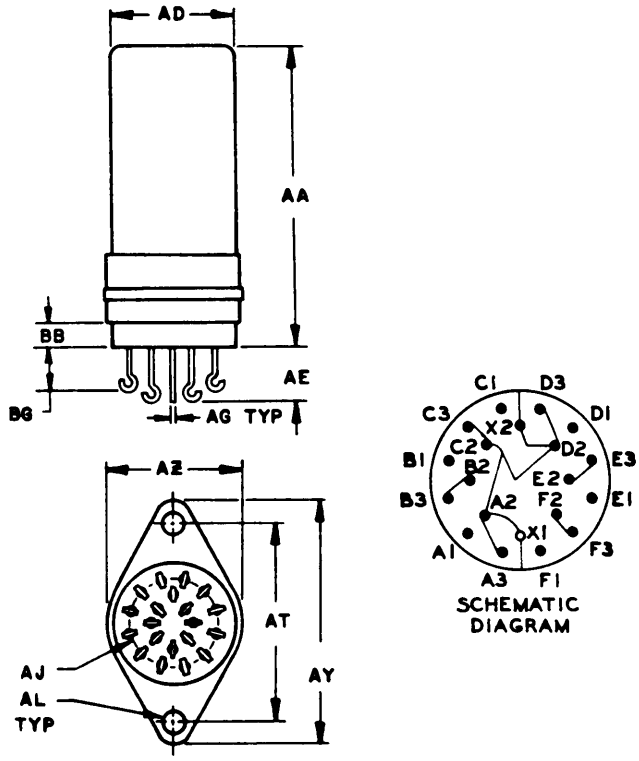


022-03-11

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

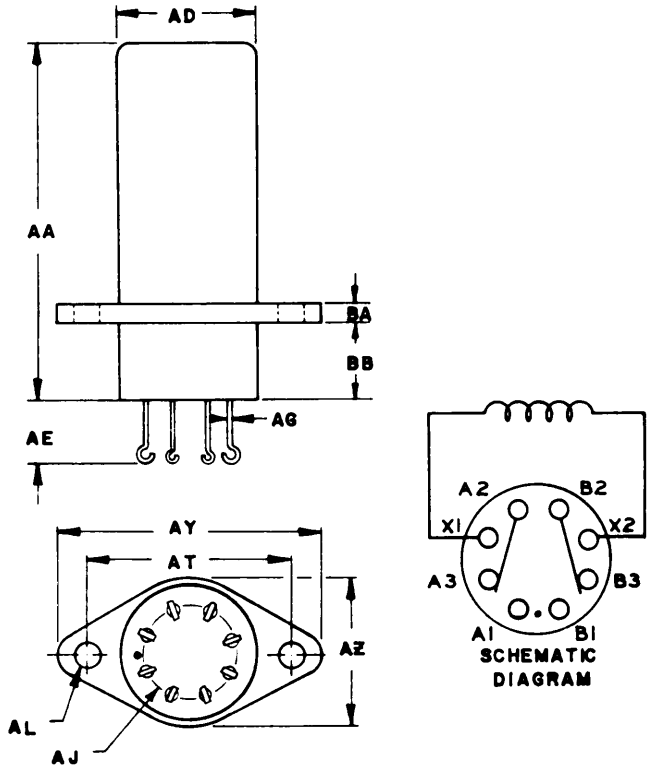


022-03-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

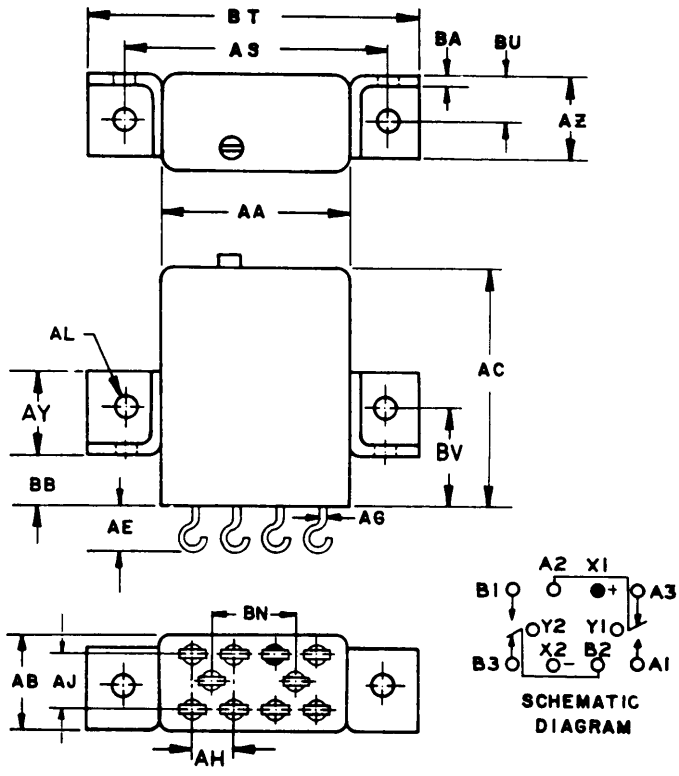


022-03-13

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

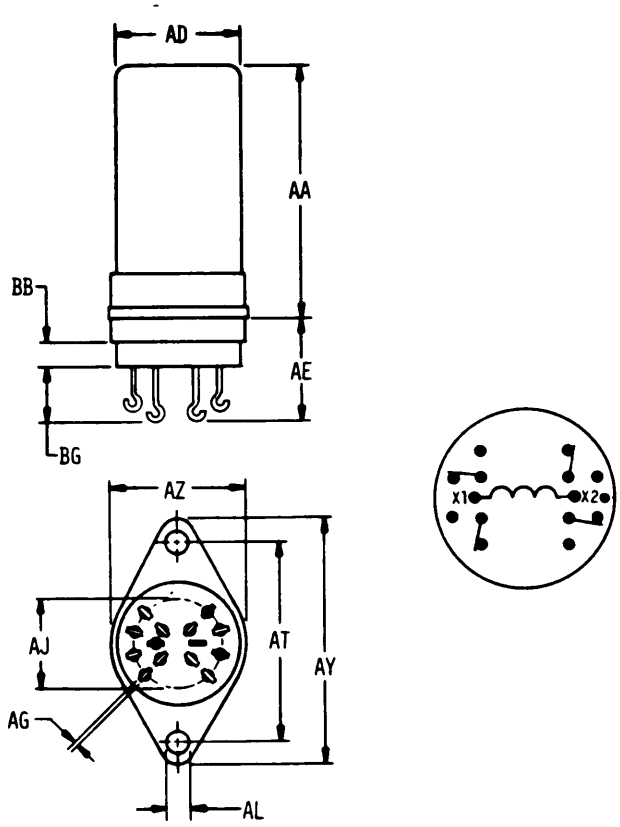


022-03-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

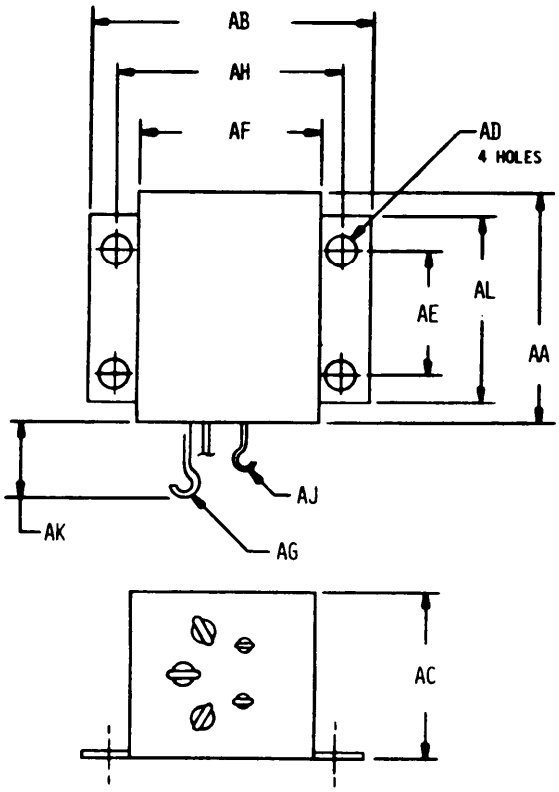


022-03-15

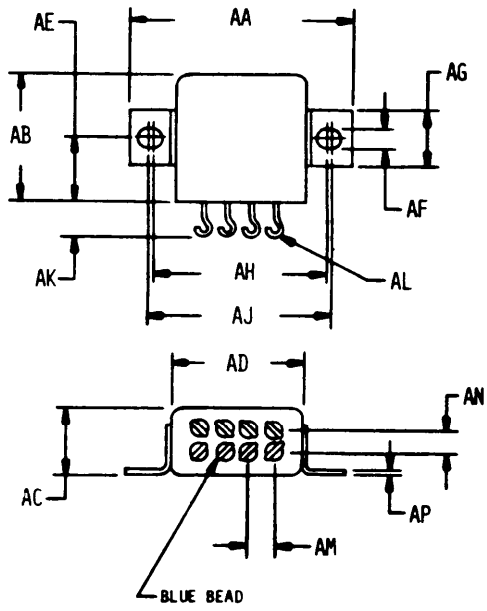


022-03-16

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

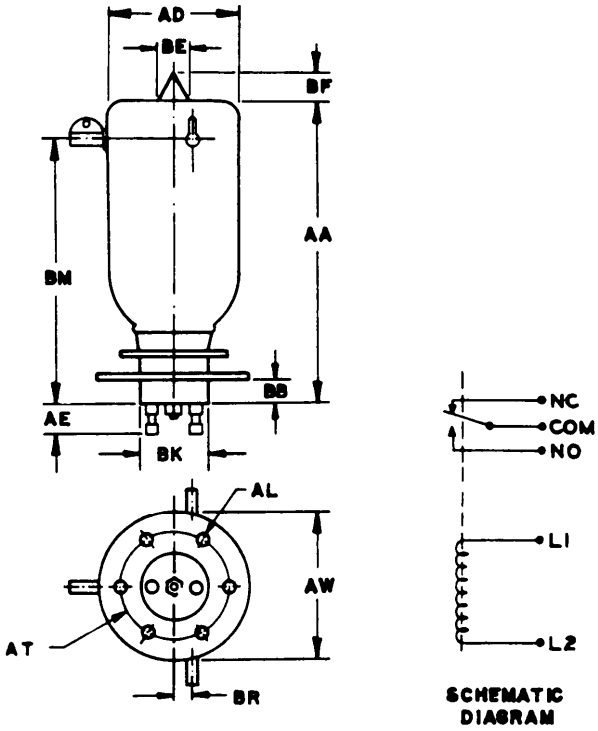


022-04-1

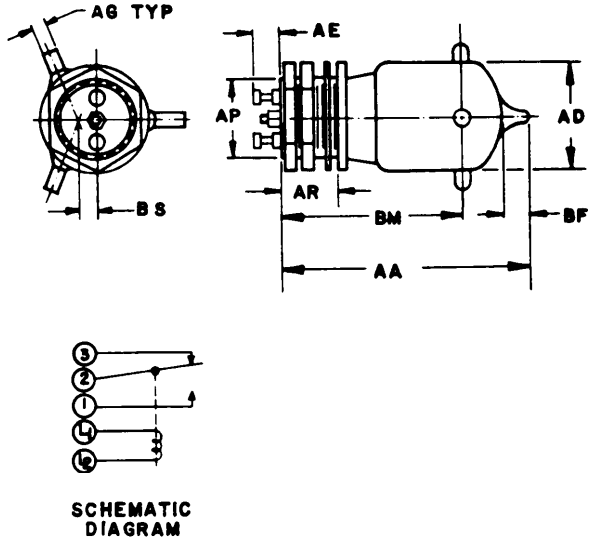


022-04-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

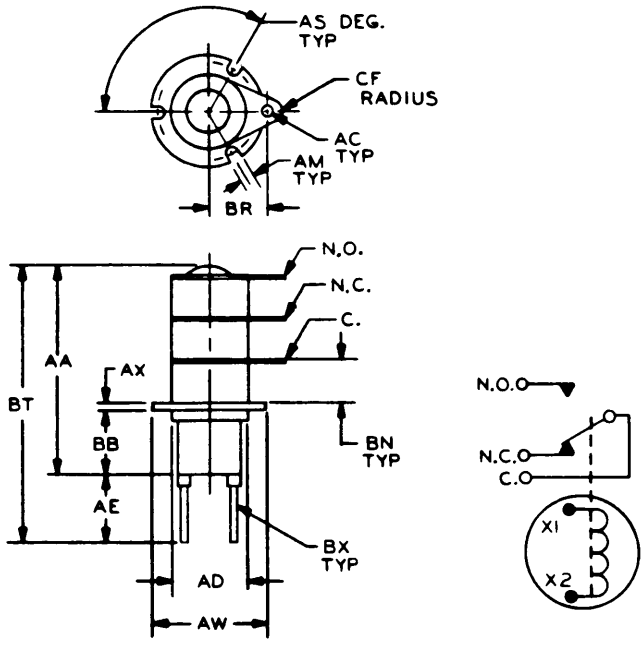


022-04-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

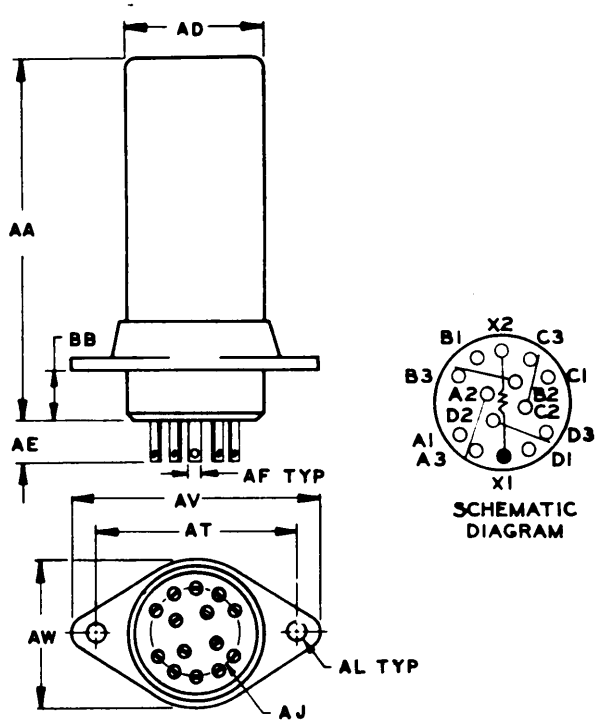


022-05-1


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

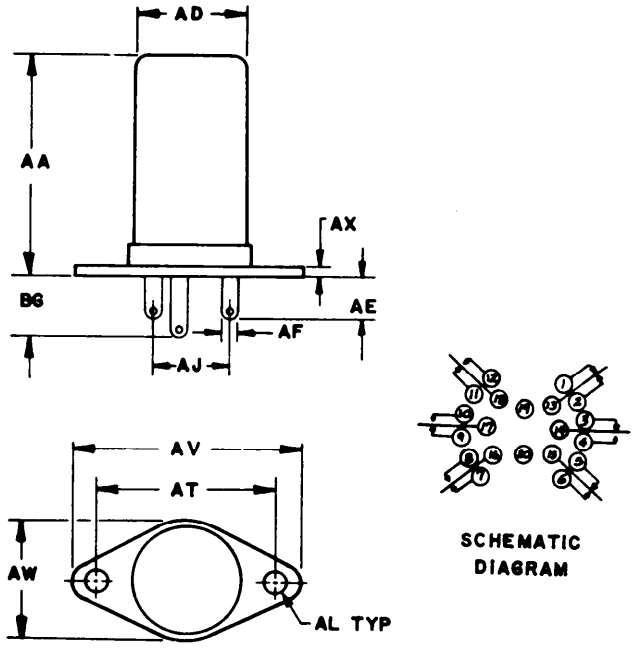


022-05-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

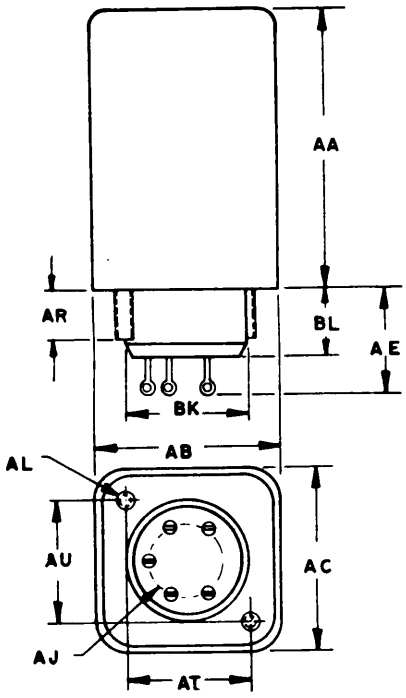




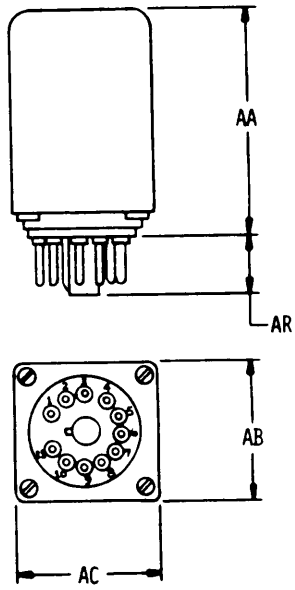


022-05-3

022-05-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

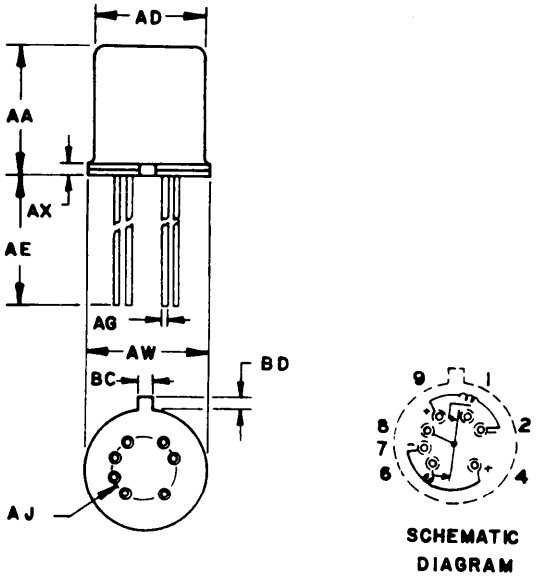


022-06-1

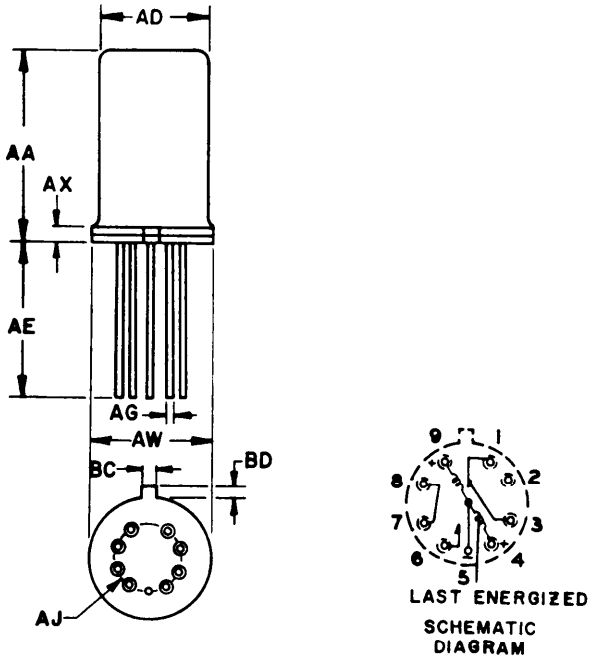


022-06-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

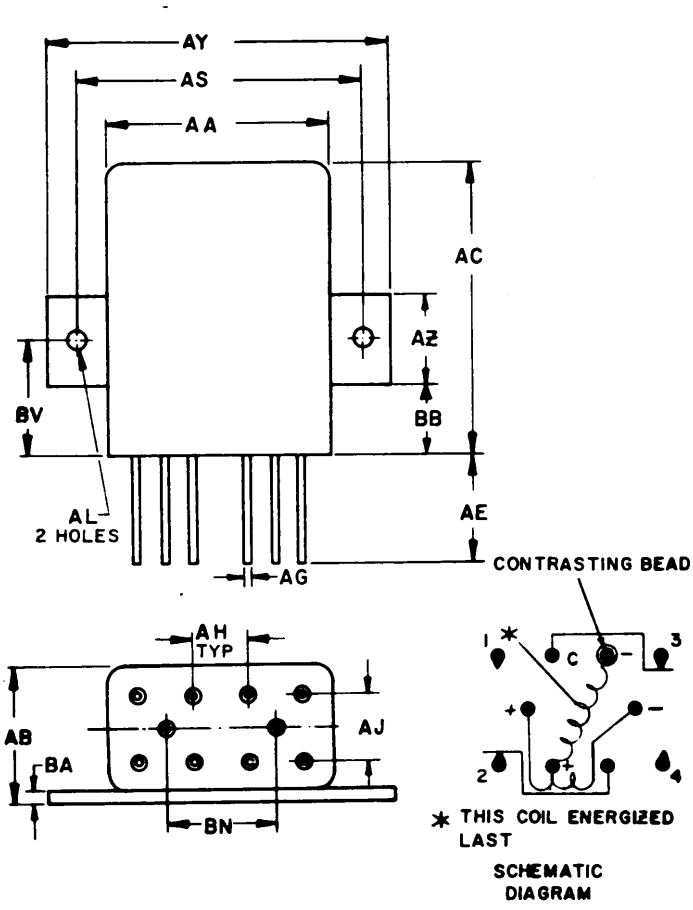


022-06-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

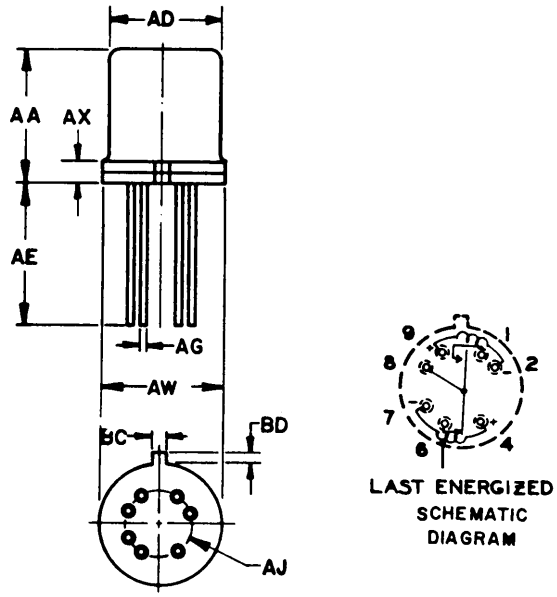


022-07-1

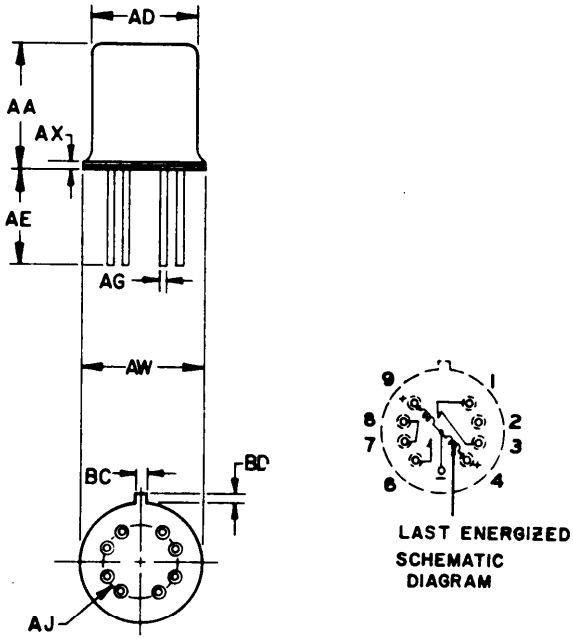


022-07-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

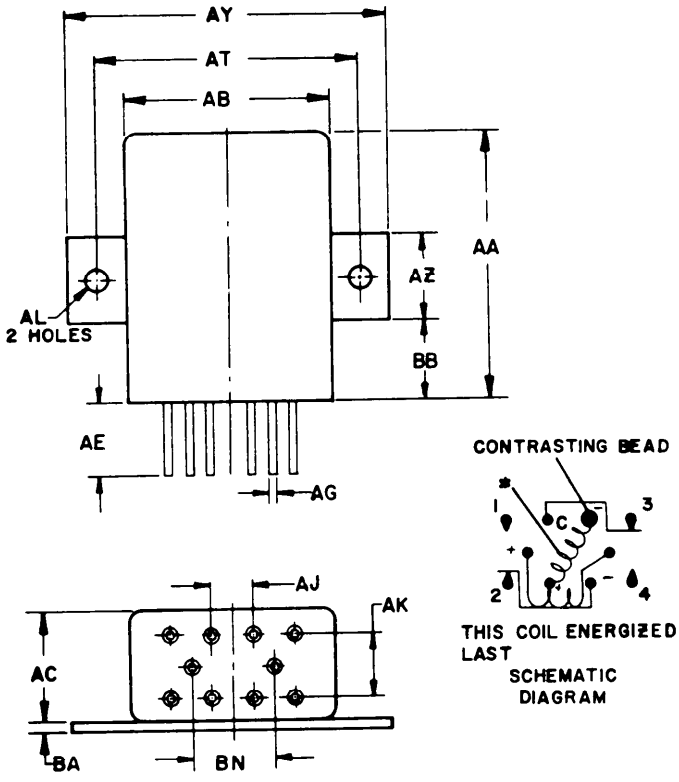


022-07-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

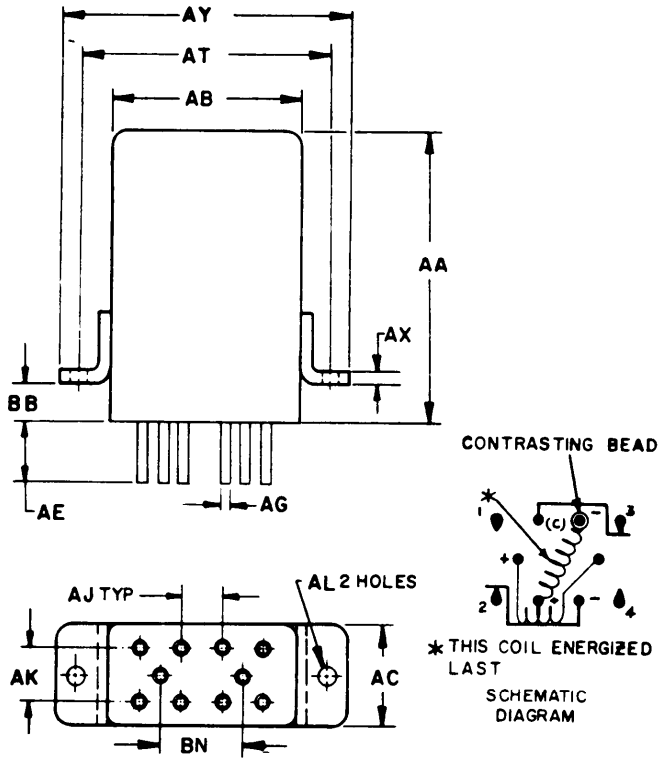



022-07-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

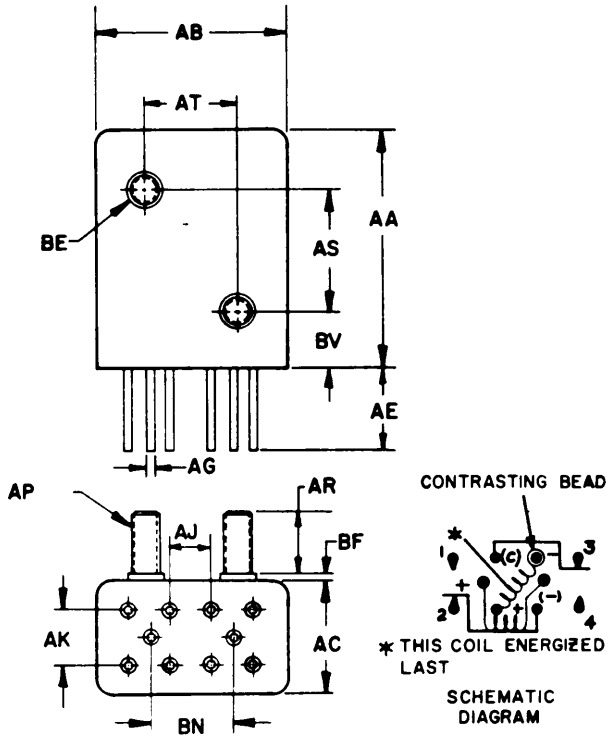


022-07-5

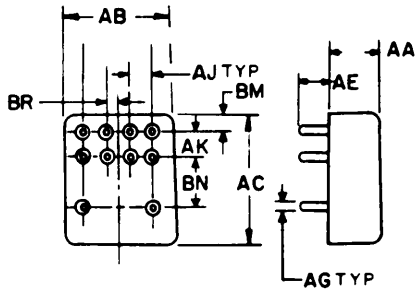

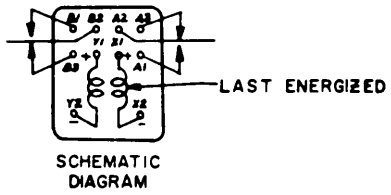


022-07-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

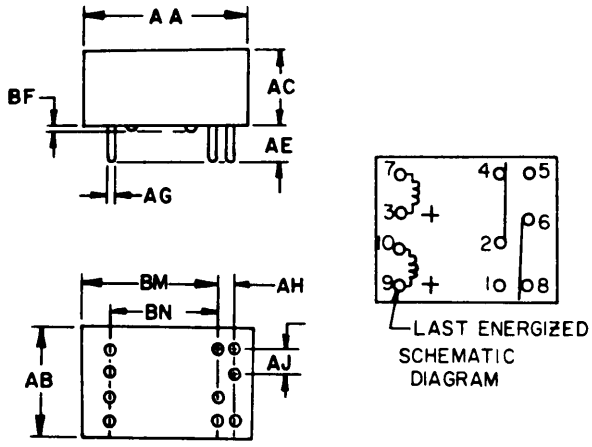


022-07-7

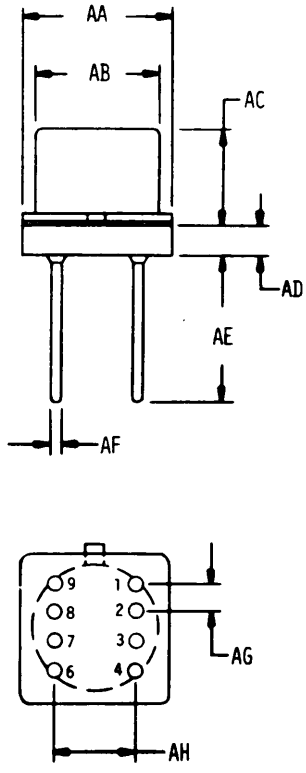


022-07-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

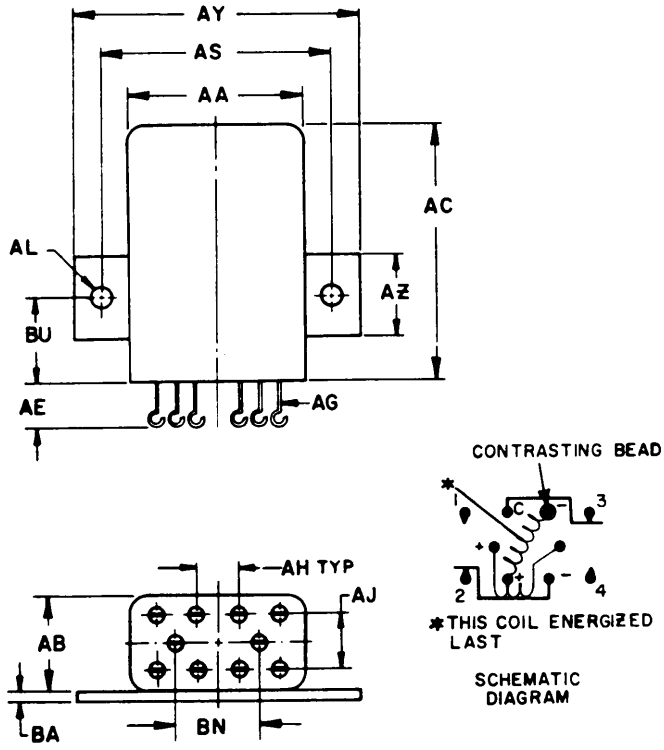


022-08-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

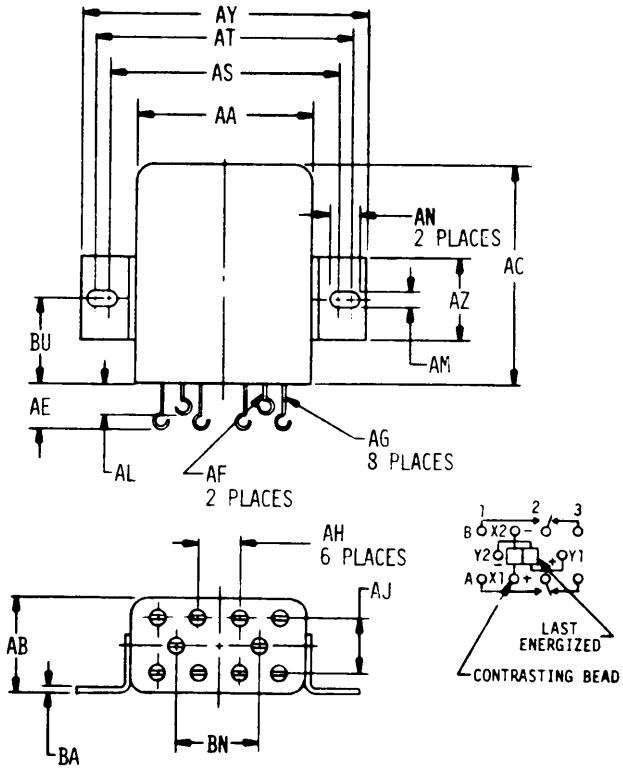


022-08-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

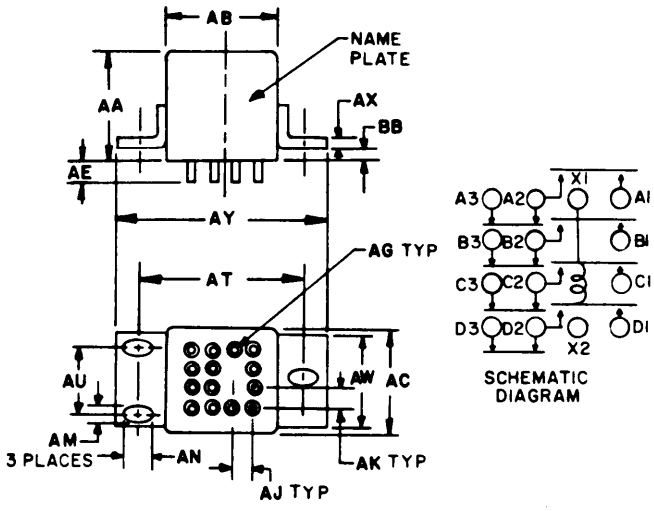


022-09-1

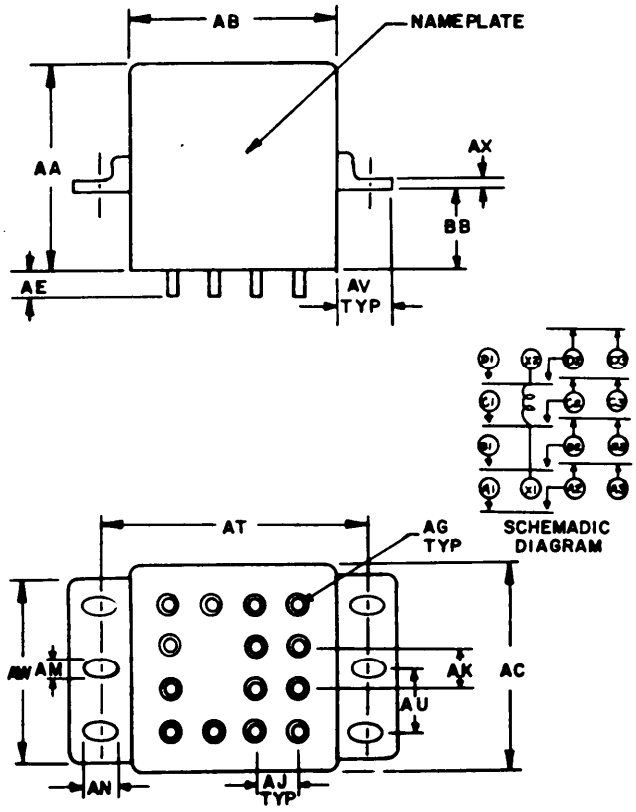


022-09-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

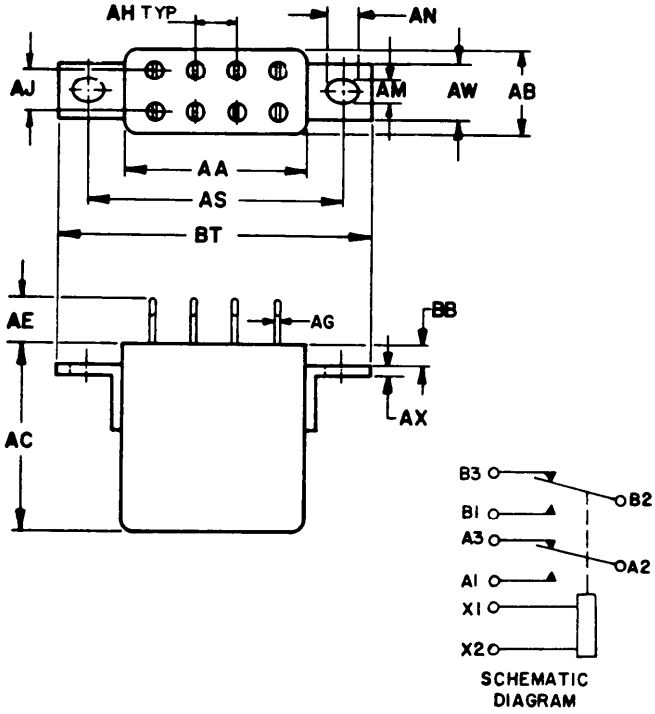


022-10-1

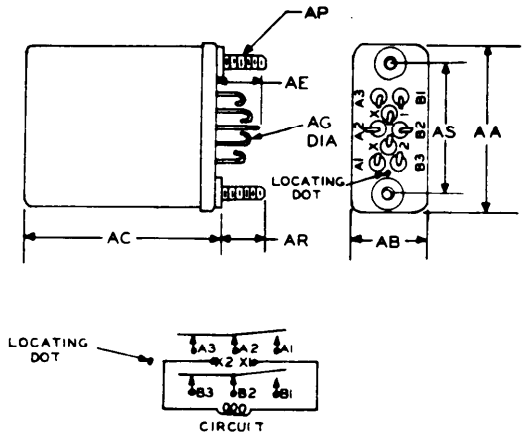


022-10-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

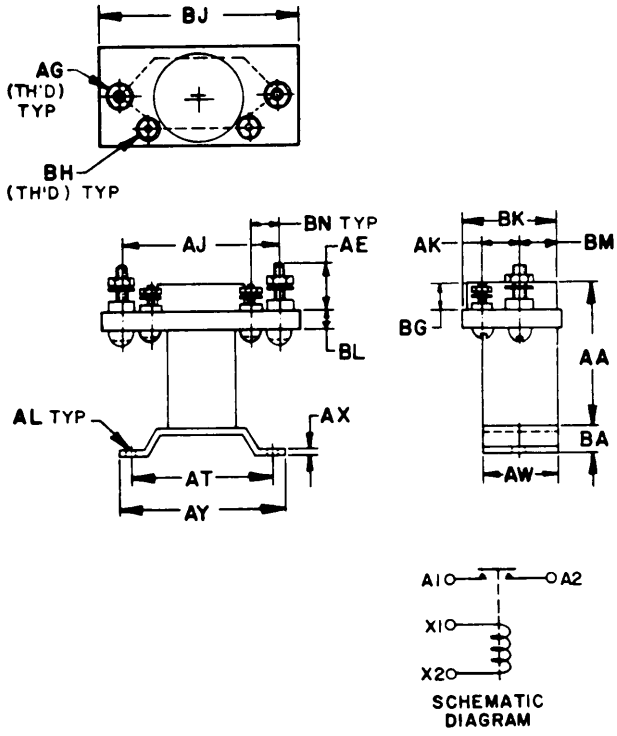


Ø22-11-1

Source: https://assist.dla.mil -- Downloaded: 2026Ø1Ø-26T07:23Z
Check the source to verify that this is the currentversion before use.

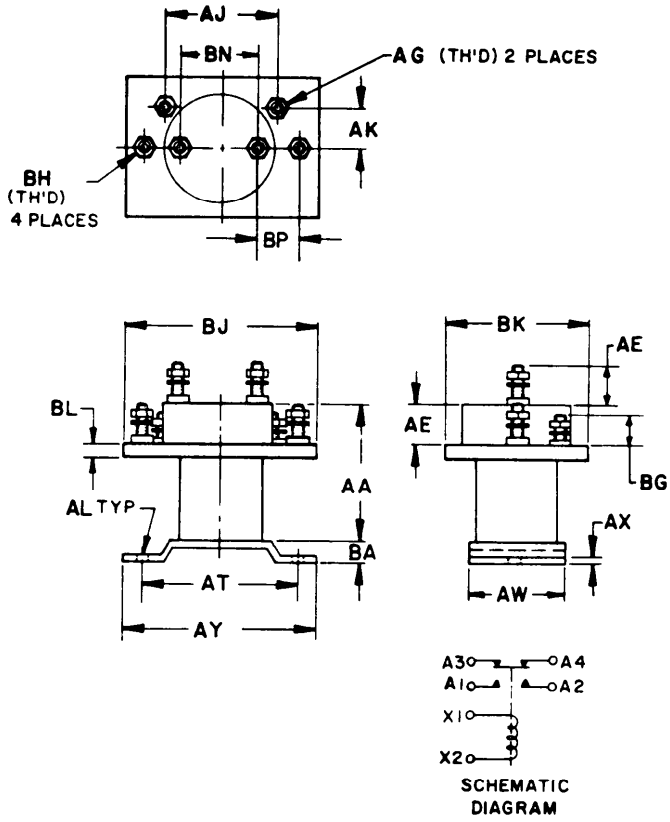


Ø22-11-2

Source: https://assist.dla.mil -- Downloaded: 2026Ø-26T07:23Z
Check the source to verify that this is the current version before use.

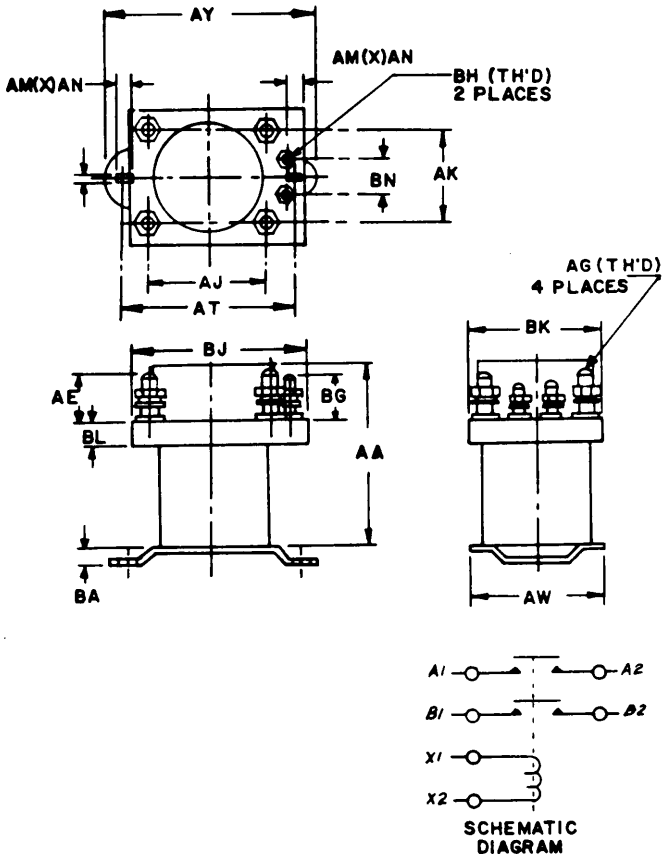


022-11-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

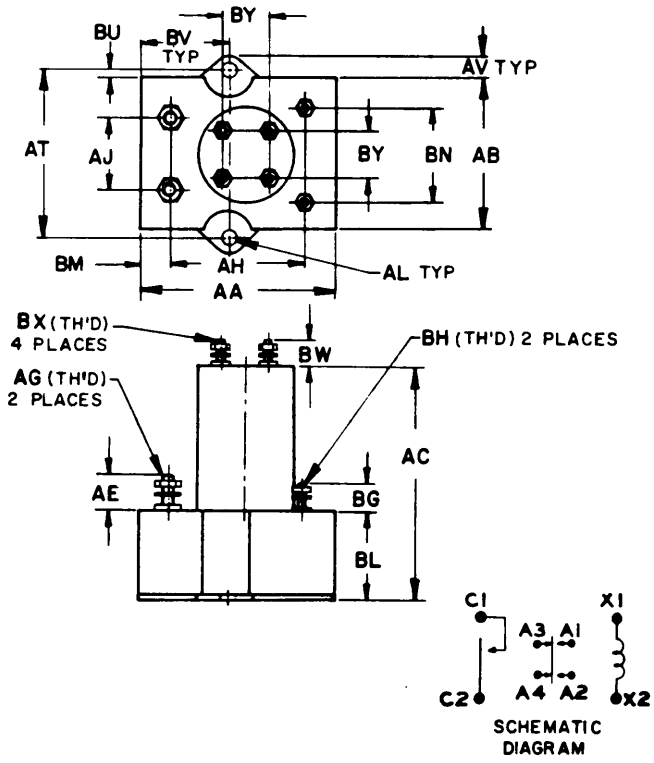


022-11-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

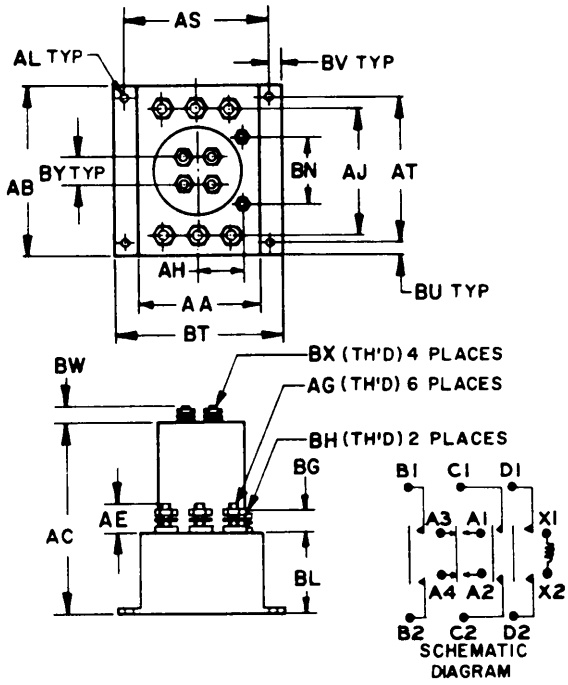


022-11-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

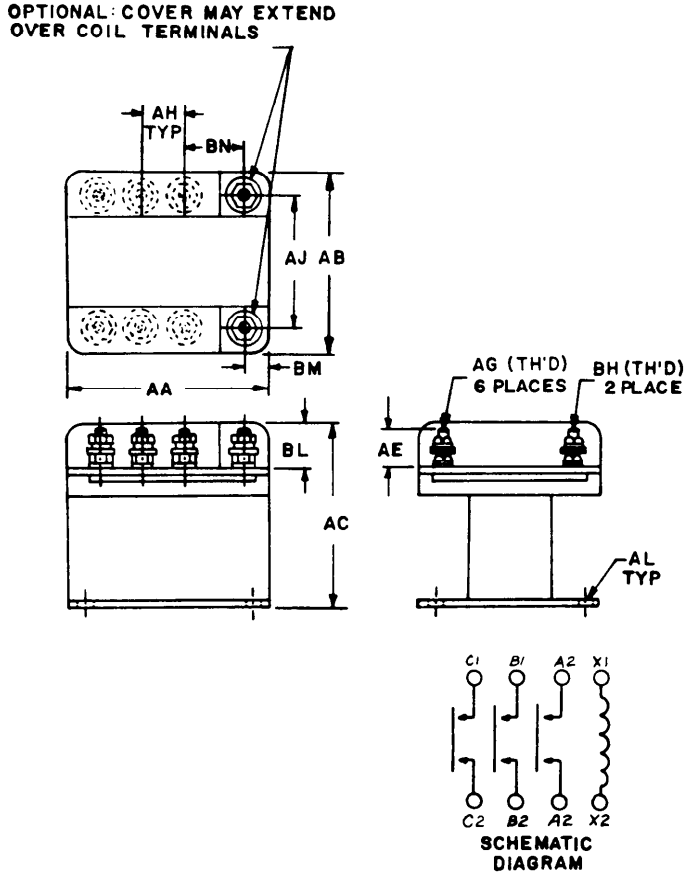


022-11-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

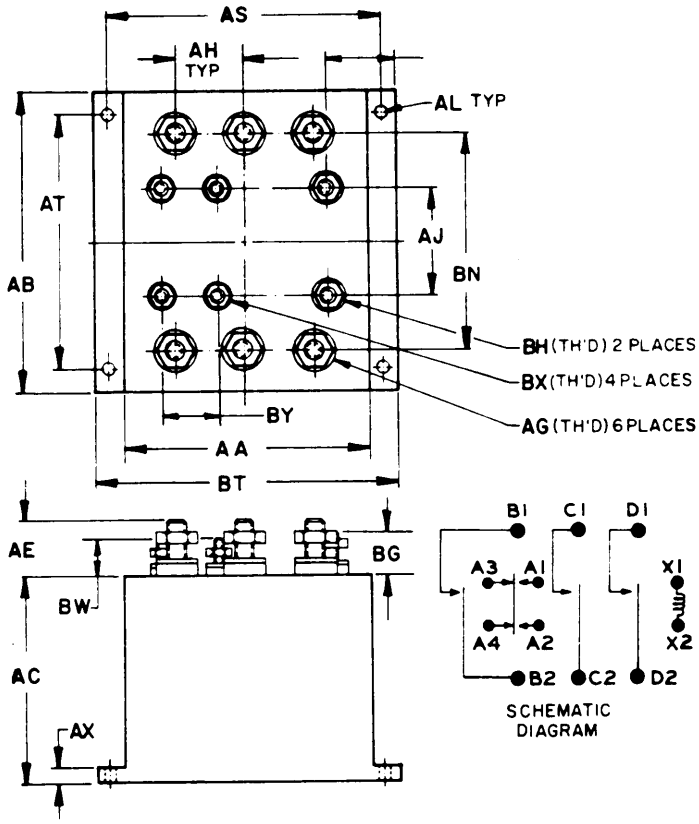


022-11-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

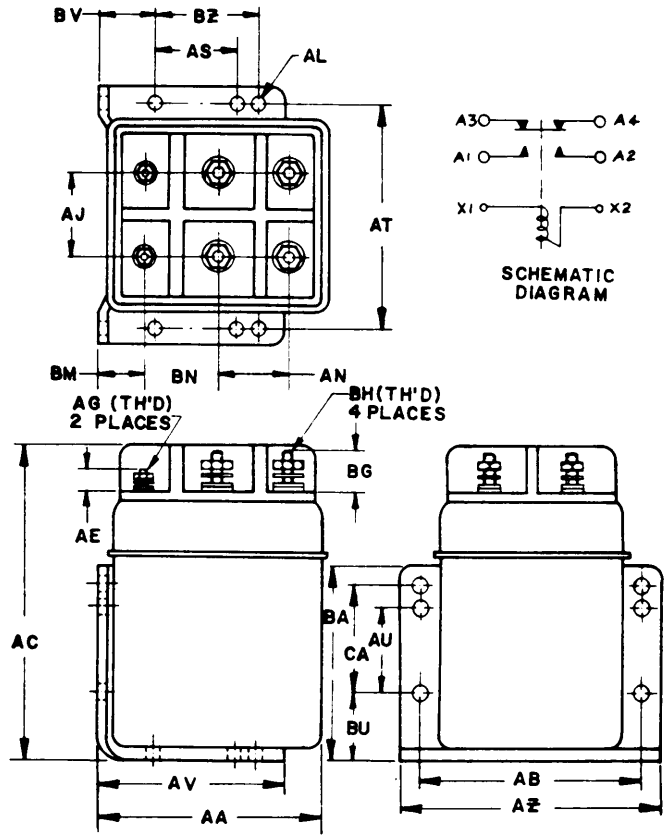


022-11-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

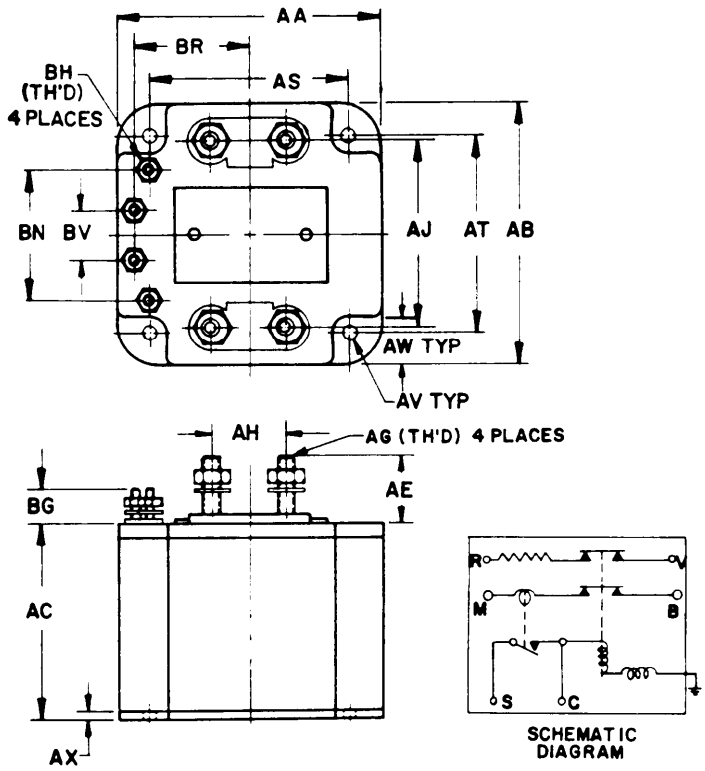


022-11-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

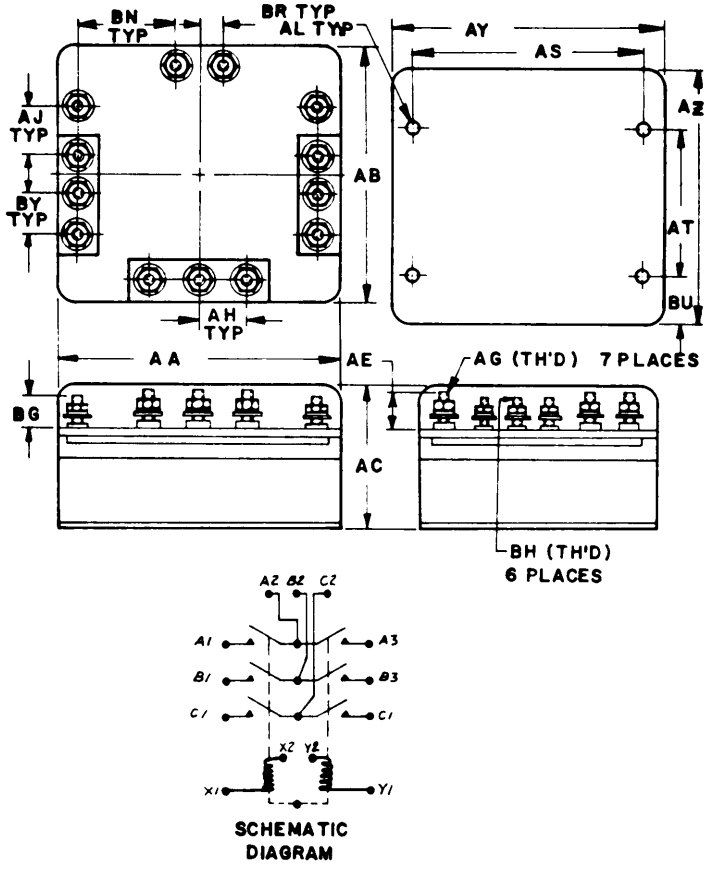


022-11-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

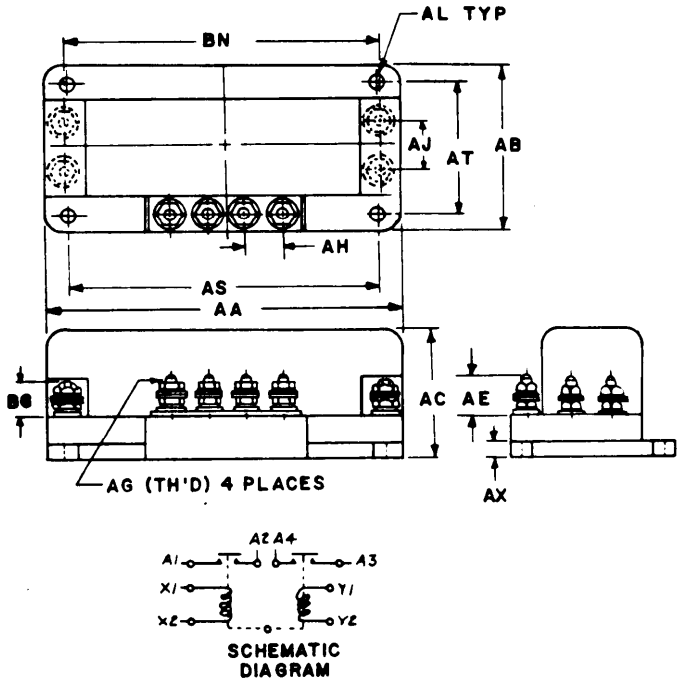


022-11-11

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

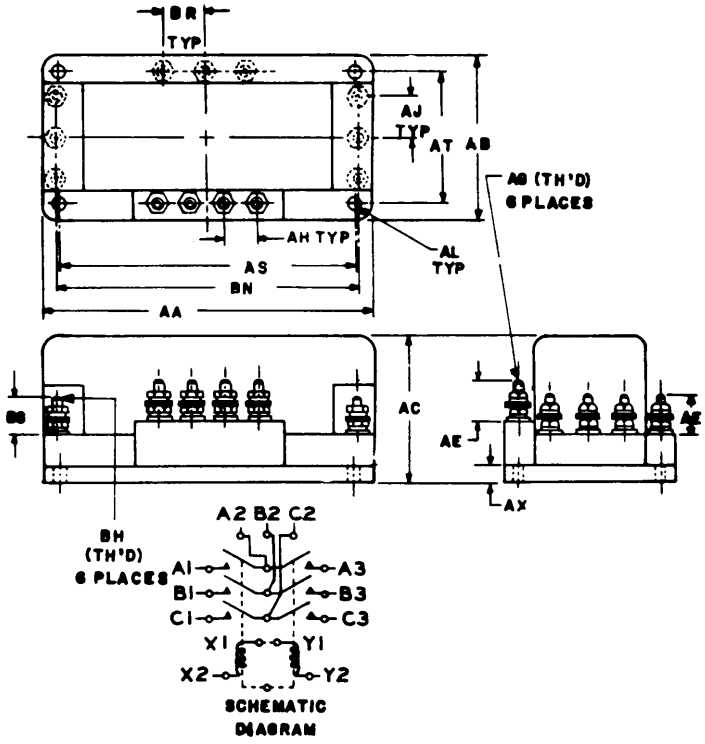


822-11-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

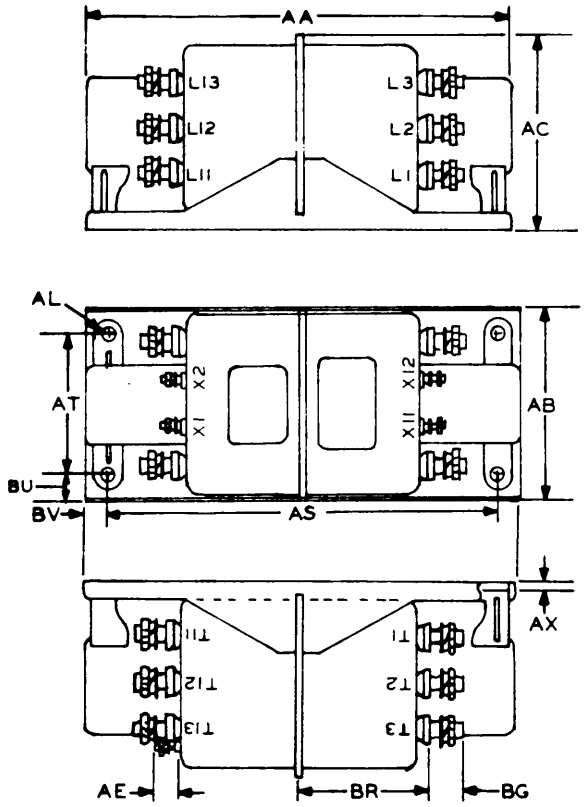


022-11-13
(SHEET 1 OF 2)

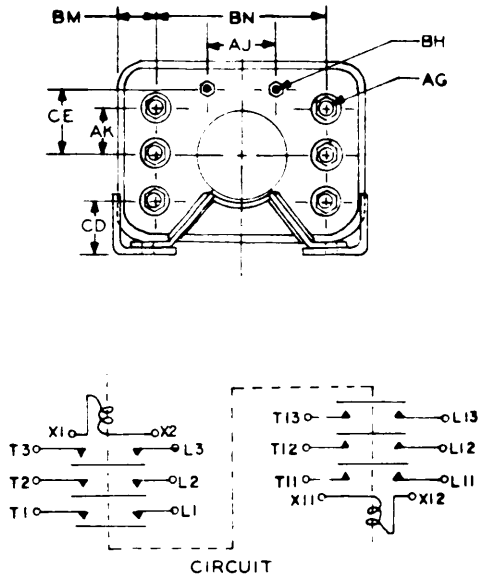


022-11-13
(SHEET 2 OF 2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

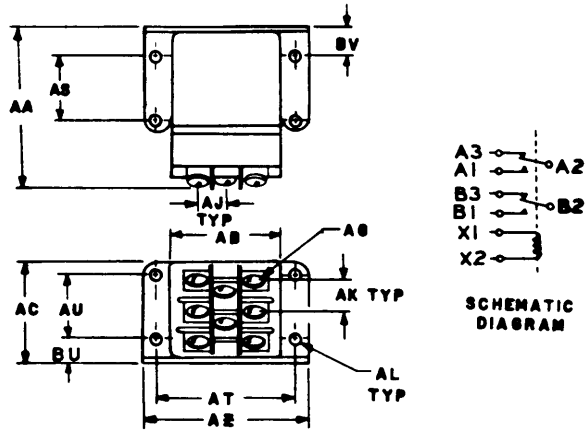


B22-12-1

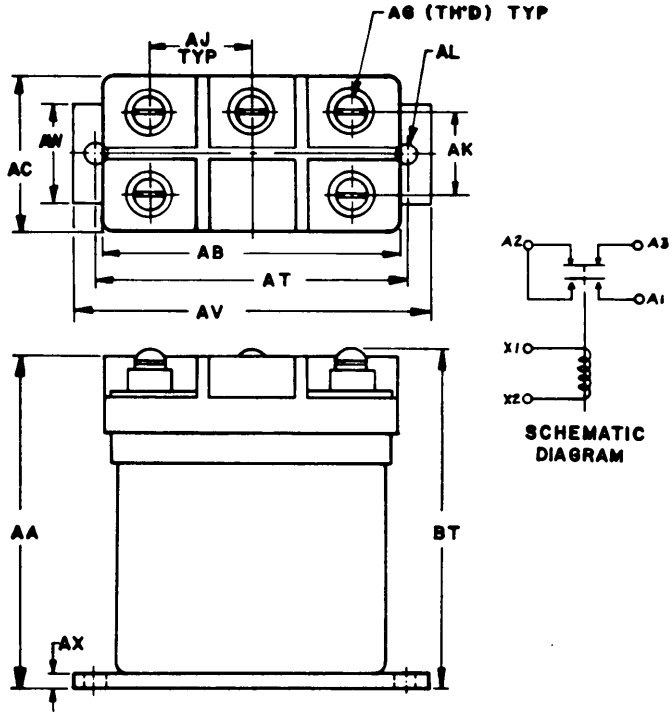


B22-12-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

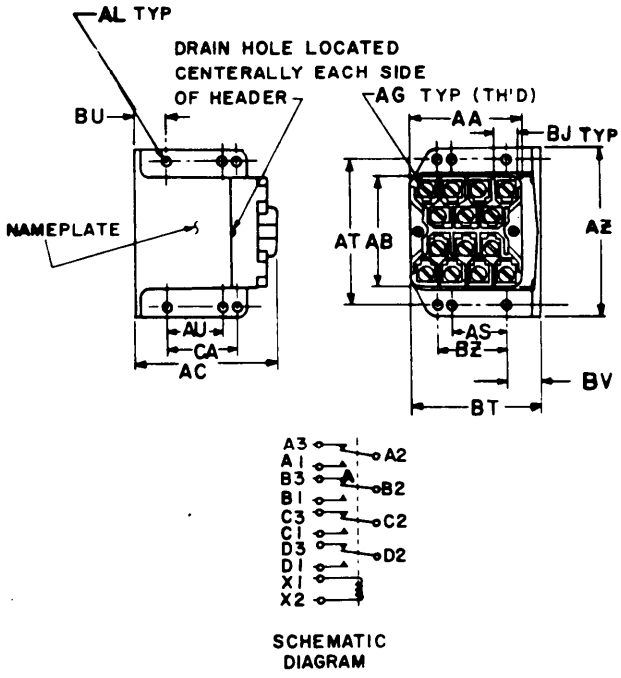


022-12-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

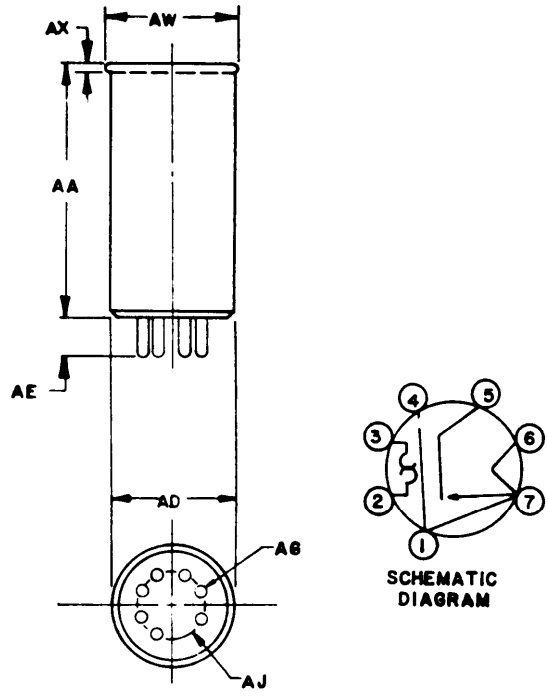


Ø22-13-1

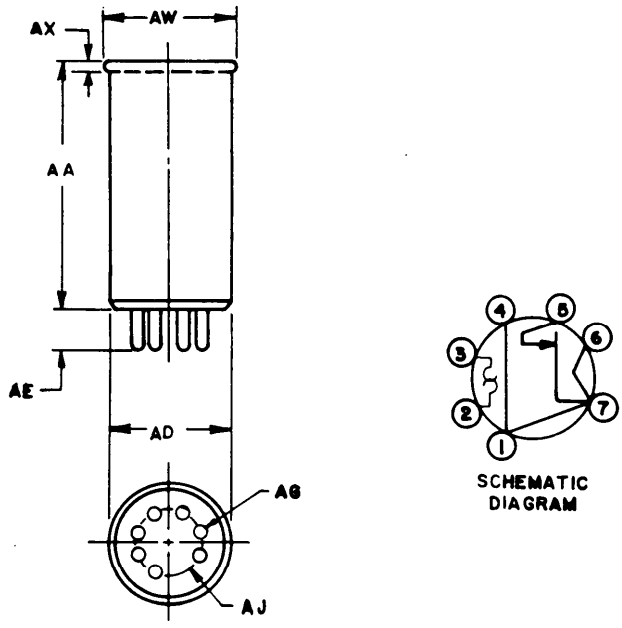


Ø22-13-2


Source: https://assist.dla.mil -- Downloaded: 2026Ø1Ø-26T07:23Z
Check the source to verify that this is the current version before use.

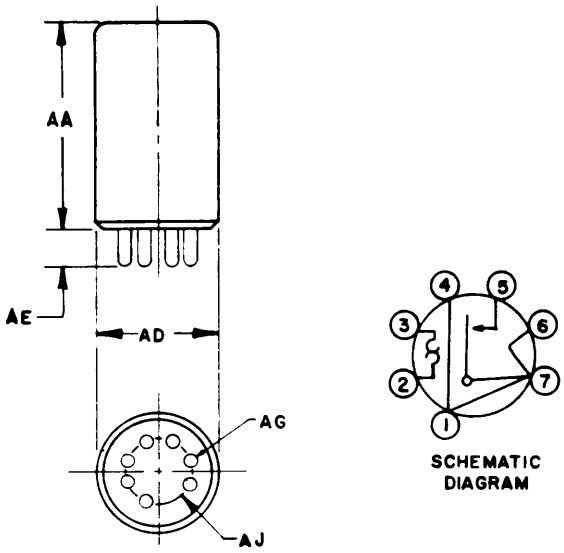

022-13-3

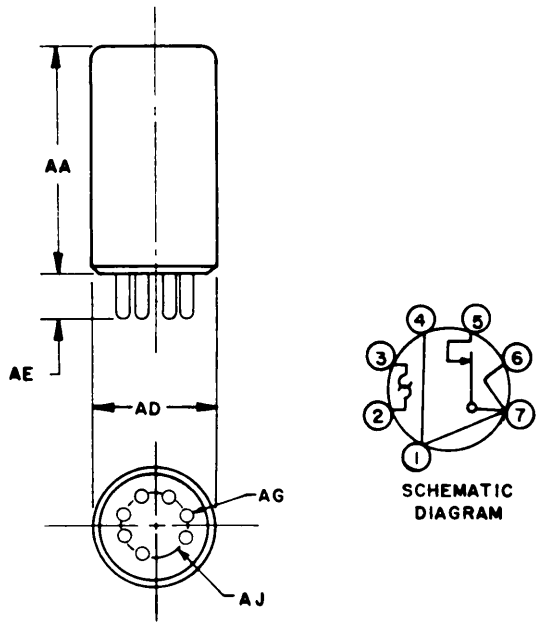


022-13-4

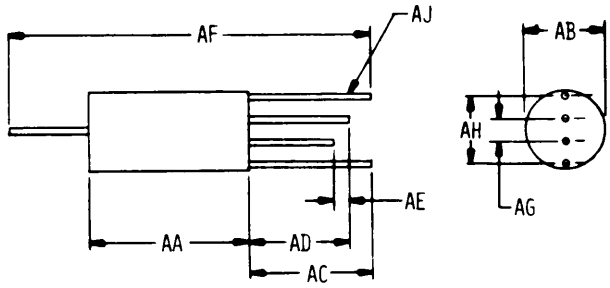


022-13-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

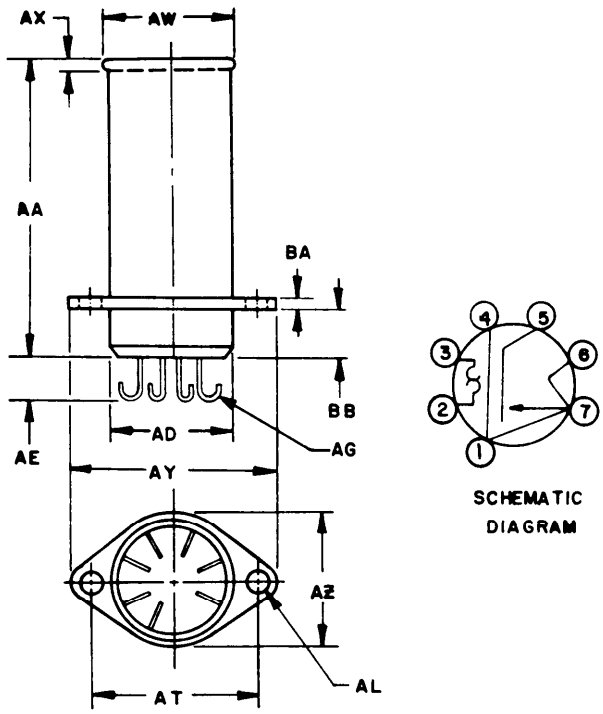


B22-14-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

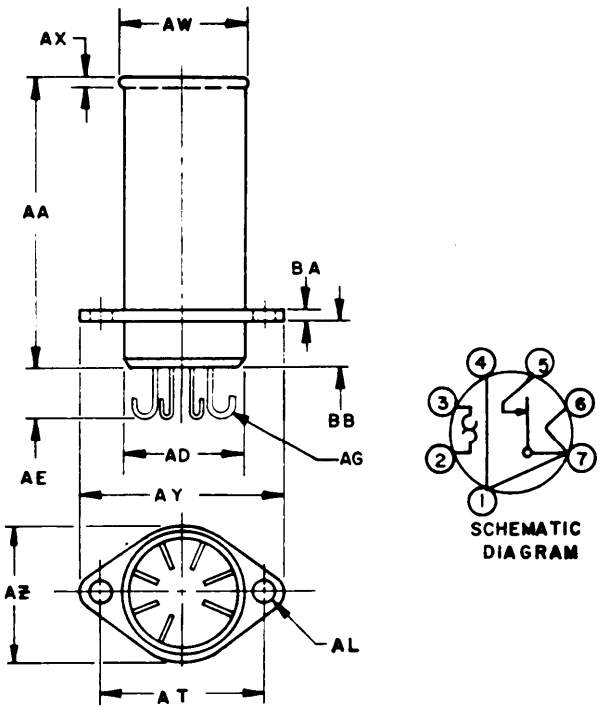


022-14-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

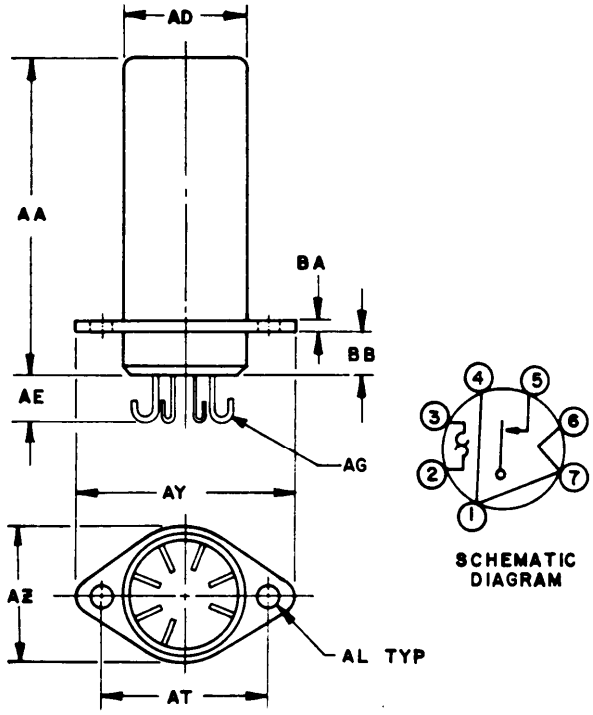


022-14-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

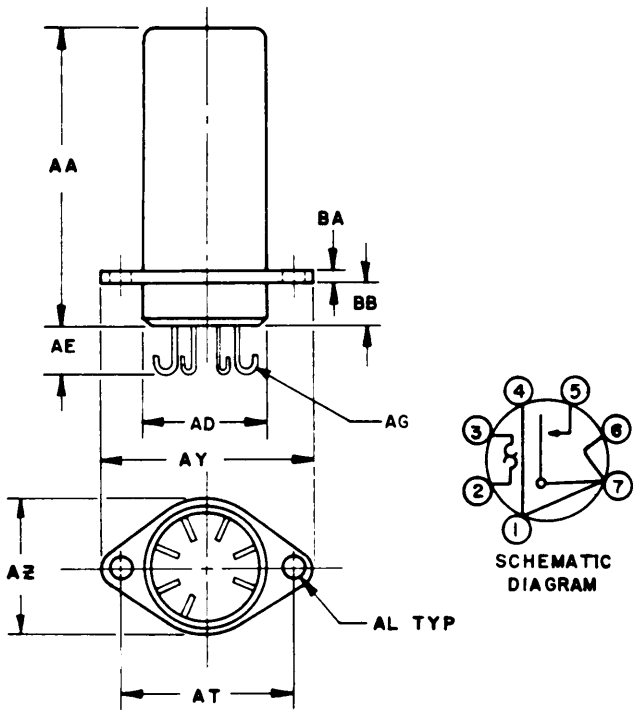


022-14-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

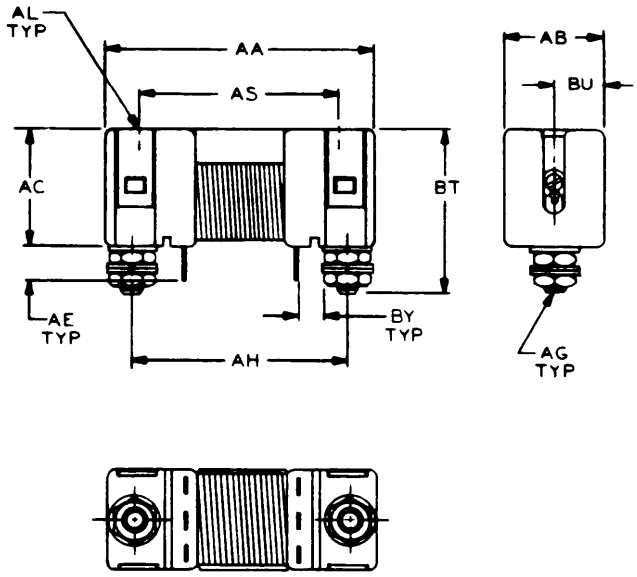


Ø22-15-1

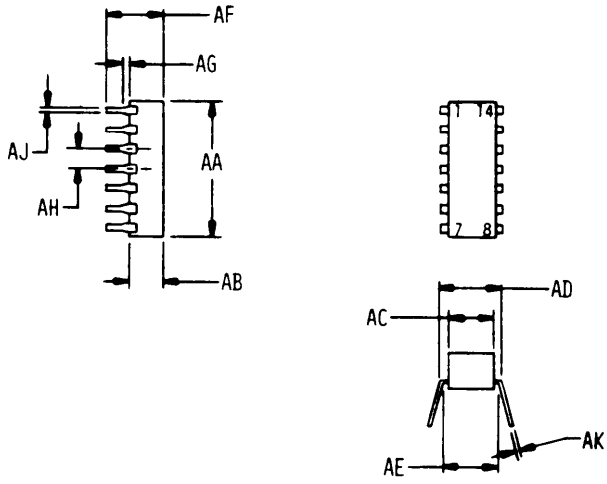


Ø22-15-2

Source: https://assist.dla.mil -- Downloaded: 2026Ø1Ø-26T07:23Z
Check the source to verify that this is the current version before use.

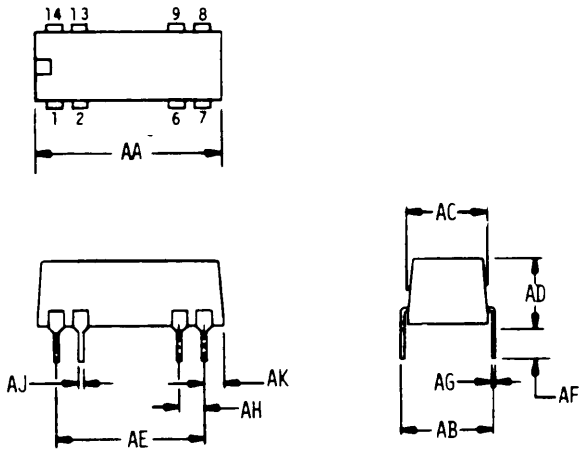


022-15-3

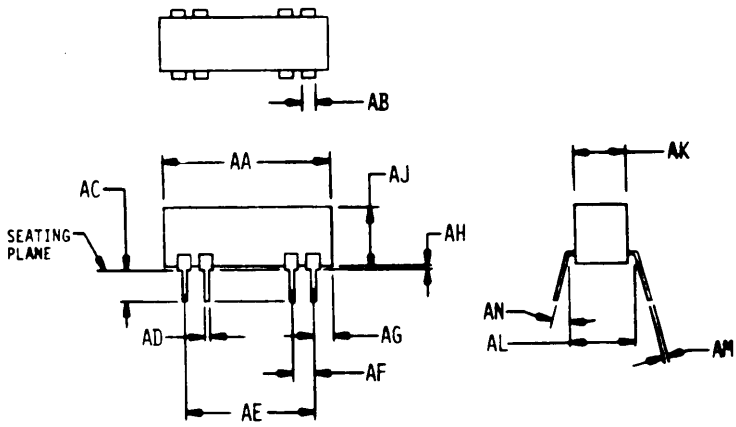


022-15-4


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

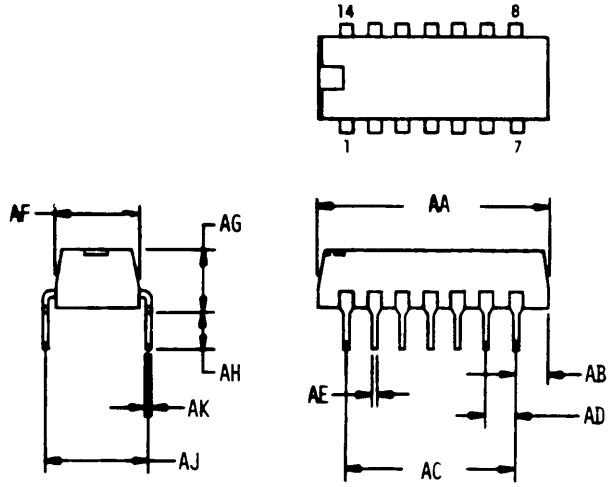

022-15-5

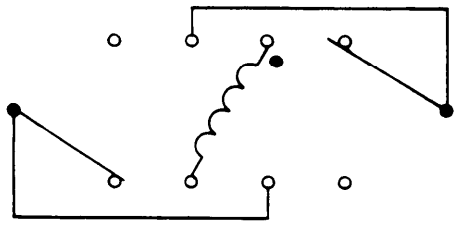


022-16-1

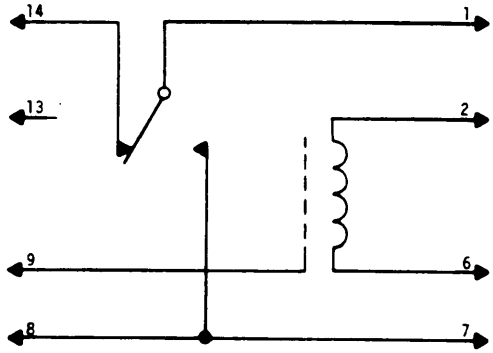


022-16-2


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

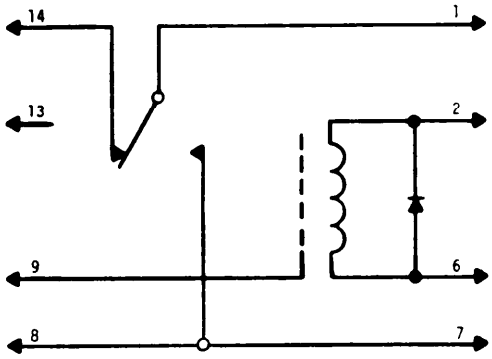


Ø22-16-3




Ø22-16-4




Ø22-16-5




Ø22-16-6




Ø22-16-7



Ø22-16-8




Ø22-16-9




Ø22-16-10


Source: https://assist.dla.mil -- Downloaded: 2026Ø-26T07:23Z
Check the source to verify that this is the current version before use.




022-16-11




022-16-12




022-16-13




022-16-20




022-16-14

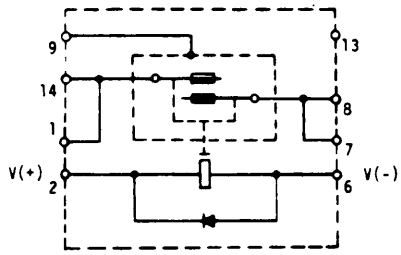


022-16-15




022-16-16



022-16-17




022-16-18




022-16-19

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

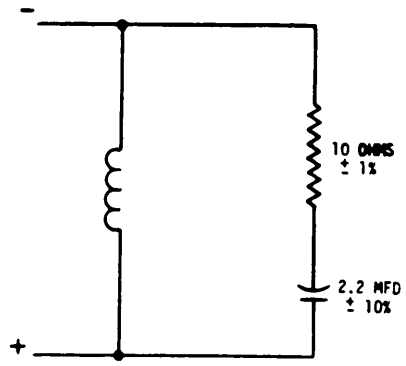

NOTE: INDUCTOR TO BE TAILORED TO DRAW A TOTAL STEADY STATE LOAD CURRENT OF 230 MILLIAMPERES.


822-17-1

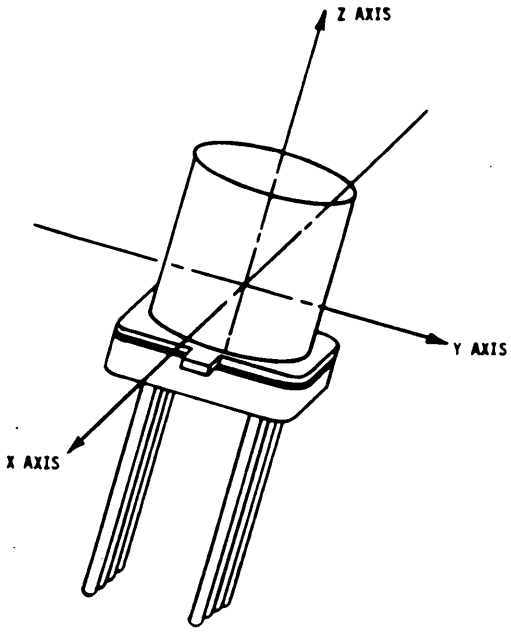

822-18-1


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

X AXIS

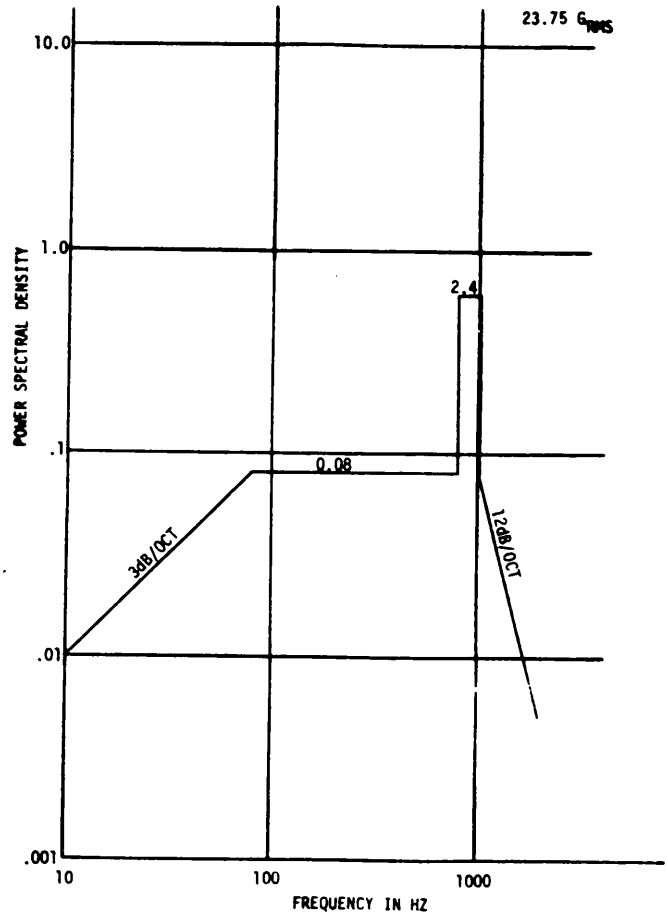


022-18-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

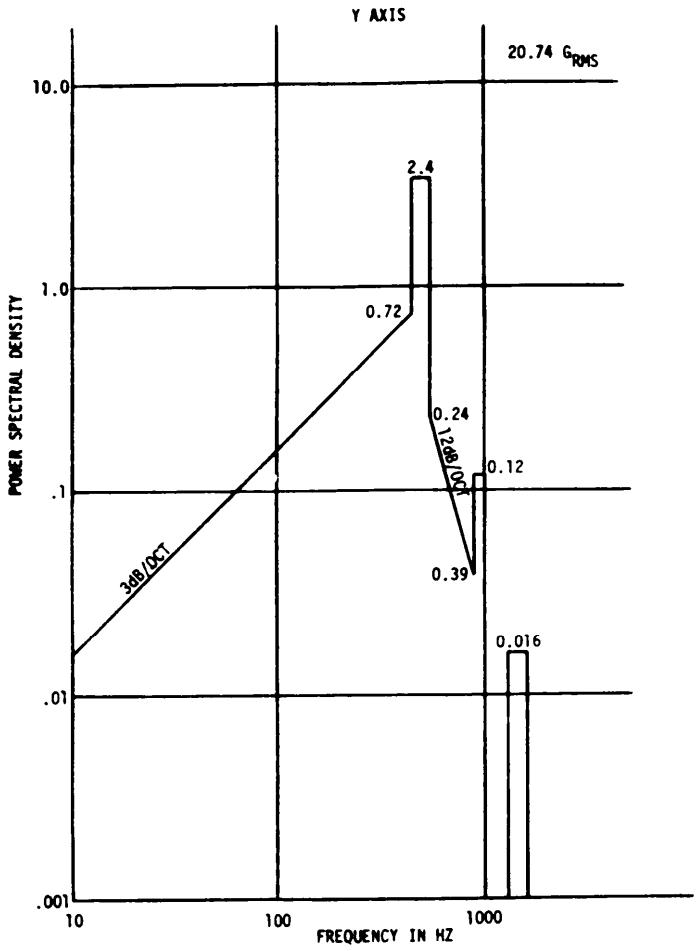

022-18-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

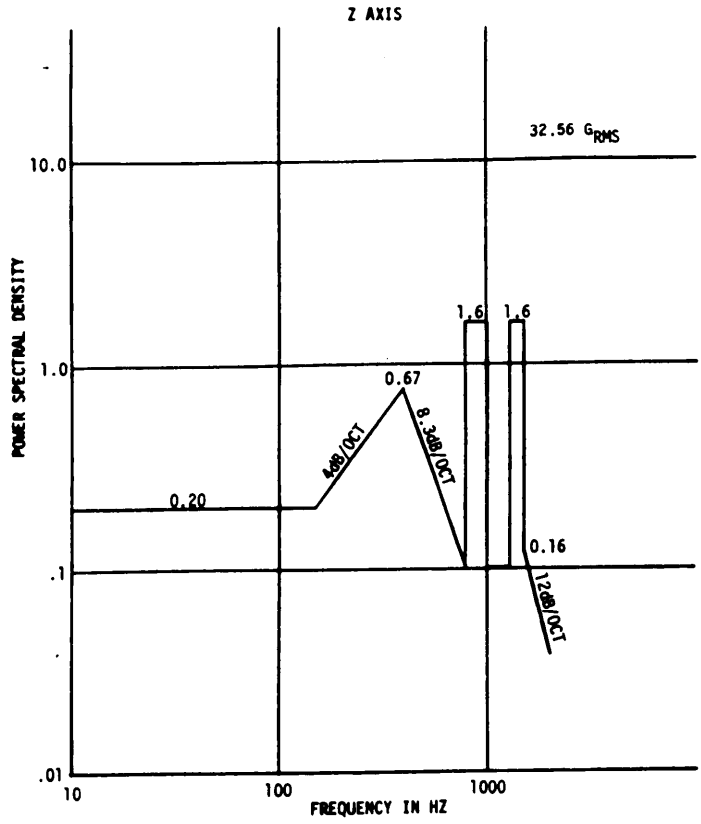

022-18-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	14	1406	174	1475	284	1553	288
0102	14	1407	148	1476	284	1557	44
0103	14	1410	264	1477	142	1558	44
O1O4	14	1411	264	1478	236	1570	18
O105	14	1412	264	1479	236	1572	18
0107	16	1413	264	1482	234	1574	18
0108	16	1414	264	1486	234	1576	18
0700	14	1416	266	1487	236	1578	18
0800	14	1418	262	1488	236	1580	18
1003	14	1419	264	1490	286	1582	18
1004	14	1420	264	1491	292	1584	18
1005	14	1421	266	1492	292	1586	18
1006	14	1426	296	1494	230	1588	18
1008	14	1427	298	1495	230	1590	26
1009	26	1428	296	1497	150	1592	26
1371	148	1429	172	1498	150	1600	32
1372	150	1430	298	1499	242	1602	32
1373	148	1431	298	1500	242	1604	32
1374	294	1432	174	1502	242	1606	32
1375	264	1433	262	1503	242	1608	32
1276	150	1435	294	1504	242	1610	32
1377	150	1436	294	1508	238	1612	32
1378	148	1438	298	1509	238	1614	32
1380	146	1439	298	1511	148	1616	32
1381	150	1442	282	1520	150	1651	32
1382	300	1444	282	1522	150	1652	32
1383	152	1446	280	1523	150	1653	32
1384	148	1447	280	1524	150	1654	32
1386	148	1448	280	1533	200	1655	32
1387	148	1449	176	1534	280	1656	32
1388	148	1452	298	1535	290	1657	32
1391	174	1453	298	1536	290	1700	40
1394	172	1455	276	1537	290	1702	40
1395	174	1456	276	1539	222	1704	40
1396	172	1459	298	1547	40	1706	40
1397	174	1462	298	1548	46	1708	40
1396	172	1466	288	1549	46	1710	40
1400	172	1467	288	1550	234	1712	42
1402	300	1468	236	1551	24O	1714	42
1404	172	1470	288	1552	280	1716	42

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1718	42	1803	52	1852	60	1925	70
1720	42	1804	52	1853	60	1930	70
1722	42	1805	54	1854	62	1931	70
1724	42	1806	54	1855	62	1932	70
1726	42	1807	54	1856	62	1933	70
1728	42	1808	54	1860	62	1934	70
1730	42	1810	54	1861	62	1935	70
1732	42	1811	54	1862	62	1936	70
1734	42	1812	54	1863	62	1937	70
1736	46	1813	54	1864	64	1938	72
1738	46	1814	54	1865	64	1939	72
1740	46	1915	54	1866	64	1940	72
1742	46	1816	54	1867	64	1941	72
1750	48	1817	54	1870	64	1942	72
1752	48	1918	56	1872	64	1943	72
1754	48	1819	56	1874	64	1944	72
1756	48	1920	56	1875	64	1950	72
1758	48	1821	56	1878	64	1952	72
1761	48	1822	56	1883	64	1953	72
1762	48	1823	56	1890	66	1954	74
1764	48	1830	56	1892	66	1955	74
1766	48	1831	56	1894	66	1956	74
1768	50	1832	56	1896	66	1957	74
1770	50	1833	58	1898	66	1960	74
1772	50	1834	58	1900	66	1962	74
1774	50	1835	58	1902	66	1963	74
1776	50	1836	58	1904	66	1964	74
1778	50	1837	58	1906	66	1965	74
1780	50	1038	58	1910	66	1966	74
1782	50	1840	58	1912	68	1970	76
1784	50	1842	58	1914	68	1972	76
1786	50	1843	60	1916	68	1973	76
1788	50	1844	60	1917	68	1974	76
1790	52	1845	60	1918	68	1975	76
1792	52	1846	60	1919	68	1980	76
1794	52	1847	60	1920	68	1962	76
1796	52	1848	60	1921	68	1983	76
1800	52	1849	60	1922	68	1984	76
1801	52	1850	60	1923	70	1990	76
1802	52	1851	60	1924	70	1992	78

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1993	78	2051	86	2117	94	2183	112
1994	78	2052	86	2118	94	2184	112
1995	78	2053	86	2120	94	2185	112
2001	78	2054	86	2122	94	2186	112
2002	78	2055	86	2124	94	2190	112
2003	78	2060	86	2125	94	2192	112
2004	78	2062	86	2126	94	2193	112
2005	78	2063	88	2127	96	2194	112
2006	80	2064	88	2128	96	2195	112
2007	80	2070	88	2129	96	2196	112
2008	80	2072	88	2030	96	2220	112
2009	80	2073	88	2132	96	2222	114
2010	80	2074	88	2133	96	2223	114
2012	80	2075	88	2134	96	2224	114
2013	80	2076	88	2135	96	2225	114
2014	80	2080	88	2140	96	2226	114
2015	82	2082	90	2142	96	2230	114
2016	82	2083	90	2150	96	2232	114
2017	82	2084	90	2152	98	2233	114
2020	82	2085	90	2153	98	2234	114
2022	82	2086	90	2154	98	2235	114
2023	82	2087	90	2155	98	2236	116
2024	82	2090	90	2156	98	2237	116
2025	82	2092	90	2160	98	2238	116
2030	82	2093	90	2162	98	2239	116
2032	82	2094	90	2163	98	2240	116
2033	84	2095	92	2164	98	2241	116
2034	84	2096	92	2165	98	2242	116
2035	84	2097	92	2166	100	2250	116
2036	84	2098	92	2167	100	2252	116
2040	84	2099	92	2170	100	2253	116
2042	84	2100	92	2172	100	2260	118
2043	84	2101	92	2173	100	2262	118
2044	84	2102	92	2174	100	2264	118
2045	84	2110	92	2175	100	2265	118
2046	86	2112	92	2176	100	2266	118
2047	86	2113	94	2177	100	2267	118
2048	86	2114	94	2178	100	2268	118
2049	36	2115	94	2180	110	2269	118
2050	86	2116	94	2182	110	2270	118

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2272	118	2333	126	2398	134	2466	154
2273	120	2334	126	2400	136	2467	154
2274	120	2335	128	2402	136	2468	154
2275	120	2336	128	2403	136	2469	154
2270	120	2337	128	2404	138	2470	154
2277	120	2338	128	2405	138	2471	154
2278	120	2339	128	2406	138	2472	156
2279	120	2340	128	2407	138	2473	156
2280	120	2341	128	2410	138	2474	156
2281	120	2342	128	2412	138	2475	156
2282	120	2343	128	2413	138	2480	156
2283	120	2350	128	2414	138	2482	156
2290	122	2352	130	2415	138	2483	156
2292	122	2353	130	2416	140	2484	156
2293	122	2354	130	2417	140	2485	156
2294	122	2360	130	2420	140	249O	158
2295	122	2362	130	2422	140	2492	158
2296	122	2363	130	2424	140	2493	158
2297	122	2364	130	2430	140	2494	158
2298	122	2365	130	2432	140	2495	158
2300	122	2366	130	2433	140	2496	158
2301	122	2367	130	2434	140	2497	158
2302	122	2368	130	2435	140	2498	158
2303	122	2369	130	2440	144	2499	160
2304	124	2370	132	2442	150	2500	160
2305	124	2371	132	2444	152	2501	160
2306	124	2380	132	2450	152	2502	160
2307	124	2382	132	2452	152	2510	160
2308	124	2383	132	2453	152	2512	160
2309	124	2384	132	2454	152	2513	160
2310	124	2385	132	2455	152	2514	160
2311	124	2386	132	2456	152	2515	160
2320	124	2387	132	2457	152	2516	162
2322	124	2390	132	2458	152	2517	162
2323	126	2392	132	2459	152	2518	162
2324	126	2393	134	2460	154	2520	162
2325	126	2394	134	2462	154	2522	162
2326	126	2395	134	2463	154	2523	162
2330	126	2396	134	2464	154	2524	162
2332	126	2397	134	2465	154	2525	162

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:23Z
Check the source to verify that this is the currentversion before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2526	162	2592	170	2670	182	2745	196
2527	162	2660	170	2672	182	2746	196
2528	162	2662	170	2673	184	2750	196
2529	164	2610	170	2674	184	2752	196
2530	164	2612	172	2675	184	2753	196
2531	164	2613	172	2676	184	2754	196
2532	164	2614	172	2677	184	2755	196
2533	164	2615	172	2678	184	2756	196
2540	164	2620	174	2679	184	2757	196
2542	164	2622	174	2680	184	2760	202
2543	164	2624	176	2682	186	2770	206
2544	164	2626	176	2683	186	2771	206
2545	164	2630	176	2684	186	2772	206
2546	164	2632	176	2685	186	2773	206
2547	164	2633	178	2666	186	2774	206
2548	166	2634	178	2687	186	2775	206
2549	166	2635	178	2088	180	2776	206
2550	166	2636	178	2689	186	2777	206
2551	166	2637	178	2690	186	2780	208
2552	166	2638	178	2700	186	2782	208
2560	166	2639	178	2702	188	2784	210
2562	166	2640	178	2703	188	2786	210
2563	166	2641	178	2704	188	2790	210
2564	166	2642	178	2710	188	2792	210
2565	160	2643	180	2712	188	2794	212
2566	168	2644	180	2713	188	2796	212
2567	168	2645	180	2714	188	2797	212
2568	168	2646	180	2720	188	2800	212
2569	168	2647	180	2722	188	2802	212
2570	168	2648	180	2730	188	2803	212
2571	168	2649	180	2732	190	2804	212
2572	168	2650	180	2734	190	2805	212
2573	168	2651	180	2736	190	2806	212
2580	168	2660	182	2737	190	2807	212
2581	168	2661	182	2738	190	2810	214
2582	170	2662	182	2739	190	2812	214
2583	170	2663	182	2740	194	2813	214
2584	170	2664	182	2742	196	2814	214
2585	170	2665	182	2743	196	2815	214
2590	170	2666	182	2744	196	2820	214

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2822	214	2888	234	2953	248	3026	258
2823	214	2889	234	2954	248	3027	258
2824	214	2890	234	2955	248	3028	250
2825	214	2891	234	2956	248	3029	258
2826	216	2092	234	2957	248	3030	258
2827	216	2893	234	2958	248	3032	260
2828	216	2894	234	2960	248	3034	260
2829	216	2895	234	2962	250	3040	260
2830	216	2696	234	2963	250	3042	260
2831	216	2900	236	2964	250	3046	260
2840	218	2902	236	2965	250	3047	260
2841	218	2904	236	2966	250	3048	260
2842	218	2906	236	2967	250	3049	260
2843	218	2910	238	2968	250	3050	262
2844	218	2911	238	2969	250	3051	262
2045	218	2912	238	2970	250	3052	262
2846	218	2913	238	2980	250	3053	262
2850	220	2914	238	2982	250	3054	262
2851	220	2915	238	2983	250	3055	262
2852	220	2916	240	2984	252	3060	266
2053	220	2917	240	2985	252	3062	266
2854	220	2918	240	2986	252	3063	266
2855	222	2919	240	2987	252	3070	266
2856	222	2920	240	2988	252	3072	266
2857	222	2921	240	2989	252	3074	266
2860	228	2922	240	3000	252	3076	266
2862	230	2923	240	3002	254	3078	266
2870	230	2924	240	3003	254	3080	260
2072	230	2925	240	3004	254	3081	268
2873	230	2926	240	3005	254	3082	268
2874	230	2930	242	3006	254	3083	268
2875	230	2932	244	3007	254	3084	268
2880	230	2934	244	3008	254	3085	268
2881	232	2936	244	3009	254	3086	268
2082	232	294O	246	3010	254	3087	260
2883	232	2942	246	3020	256	3088	268
2884	232	2943	246	3022	256	3090	270
2885	232	2944	246	3023	256	3100	270
2886	232	2950	248	3024	256	3102	270
2887	232	2952	248	3025	256	3103	270

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3104	270	3160	280	3213	294	3408	21
3105	270	3161	282	3214	294	3409	21
3106	270	3162	282	3215	294	3410	21
3107	272	3163	282	3216	296	3411	21
3108	272	3164	282	3217	296	3412	21
3109	272	3165	282	3220	296	3413	21
3110	272	3166	282	3221	296	3414	21
3112	272	3167	282	3222	296	3415	21
3114	272	3168	284	3223	296	3416	21
3116	272	3169	284	3224	296	3417	21
3120	272	3170	284	3225	296	3418	21
3122	274	3171	284	3226	296	3419	21
3123	274	3172	284	3227	296	3420	21
3124	274	3173	284	3230	300	3421	21
3125	274	3180	284	3231	30O	3422	21
3130	274	3181	286	3232	300	3423	21
3132	274	3182	286	3233	300	3424	21
3133	274	3183	286	3234	300	3425	21
3134	274	3184	286	3235	302	3426	21
3135	274	3185	286	3236	302	3430	21
3136	276	3186	286	3237	302	3431	21
3137	276	3187	285	3240	302	3432	21
3138	276	3183	288	3242	302	3433	21
3140	276	3189	288	3244	302	3434	21
3142	276	3190	288	3250	302	3435	21
3143	276	3191	288	3252	302	3436	21
3144	276	3192	288	3253	304	3437	21
3145	278	3193	288	3254	304	3438	21
3146	278	3194	288	3255	304	3439	21
3147	278	3200	290	3256	304	3440	21
3148	278	3201	290	3257	304	3441	21
3149	278	3202	292	3258	304	3442	21
3150	278	3203	292	3400	21	3443	21
3151	278	3204	292	3401	21	3444	21
3152	278	3205	292	3402	21	3445	21
3153	278	3206	252	3403	21	3446	21
3154	278	3207	292	3404	21	3447	21
3155	278	3208	292	3405	21	3448	21
3156	278	3210	294	3406	21	3449	21
3158	298	3212	294	3407	21	3450	21

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3451	21	3491	23	3531	23	3635	37
3452	21	3492	23	3532	23	3636	37
3453	21	3493	23	3533	23	3637	37
3454	21	3494	23	3534	23	3638	37
3455	21	3495	23	3535	23	3639	37
3456	21	3496	23	3600	37	3640	37
3457	21	3497	23	3601	37	3641	37
3458	21	3498	23	3602	37	3642	37
3459	21	3499	23	3603	37	3643	37
3460	21	3500	23	3604	37	3644	37
3461	21	3501	23	3605	37	3645	37
3462	21	3502	23	3606	37	3646	37
3463	21	3503	23	3607	37	3647	37
3464	21	3504	23	3608	37	3648	37
3465	21	3505	23	3609	37	3649	37
3466	21	3506	23	3610	37	3650	37
3467	21	3507	23	3611	37	3651	37
3468	21	3508	23	3612	37	3652	37
3469	21	3509	23	3613	37	3653	37
3470	21	3510	23	3614	37	3654	37
3471	21	3511	23	3615	37	3655	37
3472	21	3512	23	3616	37	3656	37
3473	21	3513	23	3617	37	3657	37
3474	21	3514	23	3618	37	3658	37
3475	21	3515	23	3619	37	3659	37
3476	21	3516	23	3620	37	3660	37
3477	21	3517	23	3620	37	3661	37
3478	21	3518	23	3622	37	3662	37
3479	21	3519	23	3623	37	3663	37
3480	21	3520	23	3624	37	3664	37
3481	21	3521	23	3625	37	3665	37
3482	21	3522	23	3626	37	3666	37
3483	21	3523	23	3627	37	3667	37
3484	23	3524	23	3628	37	3668	37
3485	23	3525	23	3629	37	3669	37
3486	23	3526	23	3630	37	3670	37
3487	23	3527	23	3631	37	3671	37
3488	23	3528	23	3632	37	3672	37
3489	23	3529	23	3633	37	3673	37
3490	23	3530	23	3634	37	3674	37

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3675	37	3715	39	3755	39	3828	31
3676	37	3716	39	3756	39	3829	31
3677	37	3717	39	3757	39	3830	31
3678	37	3718	39	3758	39	3831	31
3679	37	3719	39	3759	39	3832	31
3680	37	3720	39	3760	39	3033	31
3681	39	3721	39	3761	39	3834	31
3682	39	3722	39	3762	39	3835	31
3683	39	3723	39	3763	39	3836	31
3684	39	3724	39	3764	39	3837	31
3685	39	3725	39	3765	39	3838	31
3686	39	3726	39	3766	39	3839	31
3687	39	3727	39	3800	31	3840	31
3688	39	3728	39	3801	31	3900	198
3689	39	3729	39	3802	31	3901	198
3690	39	3730	39	3803	31	3902	198
3691	39	3731	39	3804	31	3903	198
3692	39	3732	39	3805	31	3904	198
3693	39	3733	39	3806	31	3905	198
3694	39	3734	39	3807	31	3906	202
3695	39	3735	39	3808	31	3907	202
3696	39	3736	39	3809	31	3908	202
3697	39	3737	39	3610	31	3909	202
3698	39	3738	39	3811	31	3910	202
3699	39	3739	39	3812	31	3911	202
3700	39	3740	39	3813	31	3912	202
3701	39	3741	39	3814	31	3913	202
3702	39	3742	39	3815	31	3914	202
3703	39	3743	39	3816	31	3915	204
3704	39	3744	39	3817	31	3916	204
3705	39	3745	39	3818	31	4662	244
3706	39	3746	39	3819	31	4663	246
3707	39	3747	39	3820	31	4664	246
3708	39	3748	39	3821	31	4665	246
3709	39	3749	39	3822	31	4666	246
3710	39	3750	39	3023	31	4667	246
3711	39	3751	39	3824	31	4669	208
3712	39	3752	39	3825	31	4671	208
3713	39	3753	39	3826	31	4672	244
3714	39	3754	39	3827	31	4674	244

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4675	244	4746	224	4829	210	4890	144
4677	244	4748	224	4830	208	4891	104
4678	300	4749	226	4831	210	4892	44
4683	246	4750	228	4834	208	4893	46
4684	242	4751	228	4835	210	4894	102
4685	242	4752	228	4836	208	4896	102
4686	242	4754	136	4838	210	4897	110
4689	206	4755	136	4839	210	4900	106
4691	206	4756	136	4842	108	4901	102
4692	208	4760	134	4843	192	4902	106
4694	206	4761	134	4844	108	4904	24
4695	208	4762	136	4845	108	4905	22
4698	206	4765	220	4846	108	4966	102
4700	204	4766	220	4847	106	4908	102
4701	204	4770	218	4848	108	4950	26
4707	280	4771	218	4849	104	4952	222
4708	280	4772	218	4850	108	4956	222
4709	280	4773	220	4853	144	4958	220
4713	268	4782	216	4854	108	4959	220
4714	270	4788	144	4855	108	4960	222
4715	270	4790	144	4856	106	4969	144
4717	110	4791	142	4857	192	4970	144
4719	270	4793	144	4856	192	4971	144
4722	268	4795	142	4859	104	4975	300
4723	268	4798	142	4861	108	4976	300
4729	290	4799	142	4862	108	4977	300
4730	290	4803	142	4863	44	4978	290
4731	290	4805	142	4864	44	4979	290
4732	224	4809	146	4865	44	4980	174
4734	224	4810	146	4867	110	4901	174
4735	228	4811	146	4668	44	4983	176
4736	226	4812	146	4869	110	4984	176
4737	224	4813	142	4870	110	4985	176
4738	224	4814	146	4872	222	4986	176
4739	224	4815	142	4874	106	4989	208
4740	226	4817	106	4875	106	4991	174
4741	226	4819	146	4878	216	5000	110
4742	226	4820	146	4884	102	5031	194
4743	228	4822	146	4885	104	5032	194
4745	224	4825	146	4886	102	5033	206

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
5034	228	6236	258	6323	226	6991	306
5035	264	6237	250	6324	226	6992	306
5036	254	6238	258	6325	226	6993	306
5037	264	6239	46	6326	226	6994	306
5046	24	6250	44	6328	228	6995	306
5048	24	6251	44	6329	228	6996	34
5052	24	6263	46	6330	228	6997	34
5054	24	6264	46	6331	228	6998	34
5060	24	6265	46	6332	228	6999	34
5061	24	6267	110	6333	228	7601	304
5062	24	6272	40	6359	148	7002	304
5063	24	6273	40	6369	14	7003	304
5068	24	6279	210	6370	224	7004	304
5069	22	6280	104	6371	192	7005	304
5073	24	6262	192	6372	306	7021	34
5071	22	6283	194	6696	200	7022	34
5297	194	6284	194	6697	200	7023	34
6200	230	6285	192	6698	200	7024	34
6201	232	6286	192	6699	200	7301	24
6202	144	6287	194	6700	200	7302	22
6203	236	6288	194	6701	200	7572	26
6204	242	6289	194	6702	204	7576	26
6205	246	6291	190	6703	204	7577	26
6206	144	6292	104	6706	200	7500	28
6207	144	6293	104	6707	200	7629	306
6210	46	6294	104	6710	200	7530	306
6217	254	6296	262	6713	200		
6219	254	6299	222	6870	304		
6220	254	6300	102	6873	14		
6221	254	6308	104	6874	16		
6222	256	6310	106	6920	202		
6224	256	6311	104	6921	200		
6225	256	6312	104	6922	202		
6226	44	6315	260	6923	200		
6228	252	6316	260	6929	198		
6229	252	6318	256	6930	198		
6231	258	6319	256	6537	198		
6233	44	6320	224	6939	200		
6234	258	6321	226	6941	16		
6235	258	6322	226	6942	16		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Acceleration	40
Acoustical Noise	48
Additional Part Marking	306
Additional Requirements	304
Altitude Rating	24
Aperture Cards Required	16
Applicable Documents	306
Base Document	14
Capacitance	52
Circuit Breaker Compatibility	56
City, State, Zip	14
Classification	18
Coil Characteristics	36
Coil Inductance	64
Coil/Input Driver Current	60
Coil Life	66
Coil Overload	68
Company Name/Command	14
Compartment Pressure	72
Configuration	26
Contact Arrangement	32
Contact Bounce	76
Contact Characteristics	20
Contact Noise	80
Contact Ratings	20
Contact Resistance	82
Contact Sticking	86
Connector Strength	76
Continuous Current	88
Contract Number/Office Symbol	14
Control, Source	14
Control, Specification	16
Corona	92
Crosstalk	96
Date	14
DC Resistance	98
Definition of Hermetic Sealing	306
Design and Construction	30
Dielectric Withstanding Voltage at Reduced Barometric Pressure	102
Dielectric Withstanding Voltage at Sea Level	106
Dropout Voltage or Current	110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Electrical Power Dissipation	114
Electromagnetic Interference	116
Enclosure:	32
Endurance, Electrical	118
Endurance, Mechanical	124
Explosion	128
Explosive Decompression	132
Finishes	28
Format	14
Fungus	134
Government Design Activity FSCM	14
Heater Overvoltage	136
Hold Voltage	140
Humidity	142
Illustrations	26
Immersion	146
Insulation Resistance	146
Intermediate Current Switching	152
Internal Moisture	156
Life, Low Level Switching	160
Life Rating	26
Load Transfer	164
Magnetic Interference	168
Materials	28
Mechanical Interlock	170
Metals	28
Moisture Resistance	172
Mounting Hardware	304
Nomenclature	306
Notes	306
Operate and Release Time	176
Overload	182
Ozone Resistance	186
Packaging	306
Part Marking	306
Part Number	16

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Part Number Cross-Reference	306
Phone Number	14
Pickup Voltage or Current	188
Quality Assurance Provisions	306
Radiographic	190
Recycle Time (Recovery)	194
Reliability Screening	198
Requester FSCM	14
Requester's Name	14
Resistance to Soldering Heat	204
Resistance to Solvents	208
Reverse Polarity	210
Revision of AEDPS Document (Number)	16
Rupture	214
Salt Spray	216
Sand and Dust	220
Scope	16
Seal	224
Shelf Life, Accelerated	228
Shock, High Impact	230
Shock, Specified Pulse	238
Solderability	244
Source Table	16
Street/Building	14
Strength of Mounting Means	246
Superseded Document	306
System Application	14
Tabulated Characteristics	28
Temperature-Altitude	248
Temperature, High	252
Temperature, Low	256
Temperature Rating	22
Temperature Rise	260
Terminal Characteristics	30
Terminal Strength	262
Thermal EMF	266
Thermal Shock (Temperature Cycling)	268
Transfer Time	270
Transients	272

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Units of Measure	16, 26
Vibration, High Frequency	276
Vibration, Low Frequency	284
Vibration, Random	294
Waterproofness	302
Weight	34
Workmanship	304

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET___ OF ___

*TITLE CODE 1 2 3 4 5 6	*REQUESTER NO. 7 8 9 10 11 12	CHAR CODE 13 14 15 16
*REQUESTER'S NAME		Ø 1 Ø 1
*COMPANY NAME/COMMAND		Ø 1 Ø 2
*STREET/BUILDING		Ø 1 Ø 3
*CITY, STATE, ZIP		Ø 1 Ø 4
*PHONE NO. INCLUDE A/C AUTOVON IF APPLICABLE		Ø 1 Ø 5
*DATE		1 Ø Ø 3
*REQUESTER FSCM		1 Ø Ø 4
*CONTRACT NO./OFFICE SYMBOL		1 Ø Ø 5
*BASE DOCUMENT		1 Ø Ø 6
*SYSTEM APPLICATION		1 Ø Ø 8
*GOVERNMENT DESIGN ACTIVITY FSCM		6 3 6 9
*FORMAT SIX SECTION DOCUMENT.		Ø 7 Ø Ø
ONE SECTION DOCUMENT.		Ø 8 Ø Ø
APERTURE CARDS REQUIRED.		Ø 1 Ø 7
REVISION OF AEDPS DOCUMENT NO.		Ø 1 Ø 8
*CONTROL SOURCE.		6 8 7 3
SPECIFICATION.		6 8 7 4
*SOURCE TABLE		9 1 5 1
UNIT OF MEASURE U.S.		6 9 4 1
SI.		6 9 4 2

CHARACTERISTIC VALUE

20 25 30 35 40 45 50 55 60 65 70 75 LINE NO. 79 80

PLEASE SUPPLY THE FOLLOWING:

DASH-NUMBERED PART _____ REV _____ NOTICE # _____

AS A FINAL CHECK, SCAN THE SRS FOR THE FOLLOWING COMMON ERRORS:

- ☐ MANDATORY CHARACTERISTIC CODES AND VALUES NOT SUPPLIED
- ☐ ZERO (Ø) WRITTEN WITHOUT VIRGULE (0)
- ☐ USE OF POUND SIGN (#) WITHOUT ACCOMPANYING CHARACTERISTIC VALUE
- ☐ POUND SIGN (#) OMITTED FROM END OF STATEMENT (CHARACTERISTIC VALUE)
- ☐ CHARACTERISTIC CODE USED MORE THAN ONCE (OTHER THAN MULTILINE STATEMENT)
- ☐ MULTILINE STATEMENT NOT NUMBERED IN COLUMN 80

*MANDATORY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET___OF___

TITLE CODE 1 2 3 4 5 6	REQUESTER NO. 7 8 9 10 11 12	CHAR CODE 13 14 15 16	CHARACTERISTIC VALUE 20 25 30 35 40 45 50 55 60 65 70 75	LINE NO. 79 80

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
DOD STD 35-3B

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander.
U.S. Army Missile R & D Command
ATTN: DRDMI-ESD
Redstone Arsenal, AL 35809

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.