DOD-STD-35-91A(MI)
20 January 1979
SUPERSEDING
MIL-STD-35-91(MI)
22 JANUARY 1975

MILITARY STANDARD

CONNECTOR ACCESSORIES

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

FSC EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Connector Accessories
Automated Engineering
Document Preparation System

DOD-STD-35-91A(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-91A(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for Connector Accessories.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	7
	2.1	Issues of documents	7
	2.2	Other publications	8
	3.	DEFINITIONS	9
	4.	GENERAL REQUIREMENTS	10
	4.1	Introduction	10
	4.2	Specification Requirement Sheet (SRS)	10
	4.3	Configuration	10
	4.3.1	Dimensions	10
	4.3.2	Illustrations	10
	4.4	Units of measure	10
	5.	DETAILED REQUIREMENTS	11
	5.1	Introduction	11
	5.2	MSE Formats	11
	5.3	Referenced documents	11
	5.4	Tabulation	11
	5.5	Keyword Code Index (KCI) and Standard Paragraphs	13
	5.5.1	Interrelationship of Codes	13
	5.5.2	Automatic MSE Data	13
	5.5.3	DOD-STD-35 Tables	13

TABLES

Table	I.	Title Index	2
	II.	Tabulation candidates	12

APPENDICES

Appendix	A.	Illustrations	74
	B.	Characteristic Code Index	118
		Index	121

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for Connector Accessories.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. It is recommended that MIL-STD-1353, Selection and Use of Connectors, be reviewed prior to using this dash-numbered part book.

The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
ADAPTER, REAR MOUNTING	078001	MS3184	MIL-C-26482 JAM NUT
		MS3420	TELESCOPING BUSHING
		MS23747	GLAND
		MS27342	MIL-C-38999 OPEN AND SR
		MS27487	MIL-C-38999 EMR HARDWARE
		MS27489	MIL-C-38999 EMR HRDWR REDCR
		MS27557	CONDUIT
		MS90568	MIL-C-22992
BACKSHELL, CABLE SEALING	078002	MS17340	MIL-C-22992 STRAIGHT
		MS17341	MIL-C-22992 STEP DOWN
		MS17342	MIL-C-22992 STEP UP
		MS27398	SLEEVE, COAX CA
BACKSHELL, CABLE SEALING AND GRIPPING	078003	MS90569	MIL-C-22992 STEP UP
		MS90570	MIL-C-22992 STEP DOWN
		MS90571	MIL-C-22992 STRAIGHT
BACKSHELL, CABLE SEALING AND SHIELD TERMINATION	078004	MS3419	MIL-C-26482 SHIELD TERMN
		MS3437	STRAIGHT
		MIL-C-83723	VARIOUS CONFIG

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
BACKSHELL, HEAT-SHRINKABLE BOOTS	078005	MS3158	MIL-C-5015
		MIL-C-83723	VARIOUS CONFIG
BACKSHELL, STRAIN RELIEF	078006	MS3057	MIL-C-5015 CABLE CLAMP ST
		MS3152	STRAIGHT
		MS3153	45 DEGREE
		MS3154	90 DEGREE
		MS3188	90 DEGREE
		MS3189	45 DEGREE
		MS3415	45 DEGREE
		MS3416	CABLE CLAMP ST
		MS3417	STRAIGHT
		MS3418	90 DEGREE
		MS27342	MIL-C-27599 OPEN AND SR
		MS27506	MIL-C-38999 STRAIGHT
		MS27507	90 DEGREE
		MS27658	MIL-C-38999 STRAIGHT
		MS27659	90 DEGREE
		MS27663	NON-METALLIC
		MIL-C-28840	STRAIGHT
		MIL-C-83723	VARIOUS CONFIG
BACKSHELL, SHORT	078007	MS3416	MIL-C-5015 STRAIGHT
		MS27342	MIL-C-27599 STRAIGHT
BACKSHELL, RFI GROUNDING	078008	MS3161	MIL-C-5015 RING
		MS3419	MIL-C-26482 SHIELD TERMN
		MS18192	MIL-C-28748 SHIELD, SR
		MS18193	SHIELD, SR
		MS18224	MIL-C-22992 RT ANG, CAP
		MS27666	EMI
		MS27741	SHIELD TERMN
		MIL-C-83723	VARIOUS CONFIG

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
BACKSHELL, RFI GROUNDING	078008 (CONT)	MIL-C-24308	RECTANGULAR
BOOT	078009	MS3109	MIL-C-5015 STRAIGHT
		MS3117	RT ANGLE
		MS3118	SLEEVE
		MS27397	COAXIAL CONTACT
CLAMP	078011	MS3057	MIL-C-5015 CABLE CLAMP ST
		MS3152	STRAIGHT
		MS3153	45 DEGREE
		MS3154	90 DEGREE
		MS3188	90 DEGREE
		MS3189	45 DEGREE
		MS3415	45 DEGREE
		MS3416	STRAIGHT
		MS3417	STRAIGHT
		MS3418	90 DEGREE
		MS27291	SUPPORT
		MS27342	MIL-C-27599 STRAIGHT
		MS27506	MIL-C-38999 INTERNAL THD
		MS27507	EXTERNAL THD
		MS27658	MIL-C-38999 STRAIGHT
		MS27659	90 DEGREE
		MS27668	STRAIGHT
		MS27669	45 DEGREE
		MS27670	90 DEGREE
		MS90561	MIL-C-22992 GRIP, WOVEN
		MIL-C-24308	SHIELD
		MIL-C-39012	COAXIAL ASSY
		MIL-C-83723	VARIOUS CONFIG
CONNECTOR, DUMMY	078019	MS3105	MIL-C-5015
		MS3115	MIL-C-26482
		MS18062	MIL-C-22992 RECEPTACLE
		MS27192	RECEPTACLE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
CONNECTOR, DUMMY	078019 (CONT)	MS27567	MIL-C-38159 MALE
		MS27568	FEMALE
		MIL-C-83713	DETAIL SHEET 61
CONTACT	078024	MIL-C-39029	VARIOUS CONFIG
COVER	078015	MS3180	MIL-C-26482 PLUG, BAYONET
		MS3181	RECPT, BAYONET
		MS3182	MIL-C-81703 PLUG, PUSH-PULL
		MS3183	RECPT, BALL
		MS3505	MIL-C-81790 RECT COVER
		MS17349	MIL-C-22992 RECPT, THREADED
		MS17350	PLUG, THREADED
		MS25042	MIL-C-5015 PLUG, THREADED
		MS25043	RECPT, THREADED
		MS27193	PLUG, THREADED
		MS27501	MIL-C-38999 PLUG, BAYONET
		MS27502	RECPT, BAYONET
		MS27510	PLUG, BAYONET
		MS27511	RECPT, BAYONET
		MS90376	PLASTIC CAP
		MS90563	MIL-C-22992 RECPT, THREADED
		MS90564	PLUG, THREADED
		MIL-C-28840	THREADED
		MIL-C-39012	COAXIAL
		MIL-C-83723	VARIOUS CONFIG
GROMMET	078022	MS27271	MIL-C-38159 CABLE SEAL
MOLD, POTTING	078018	MS3185	ST AND RT ANGLE
		MS25183	POTTING FORM
		MS27332	MIL-C-27599 POTTING RING
		MS27333	POTTING BOOT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
MOLD, POTTING	078018 (CONT)	MS27485	MIL-C-38999 POTTING RING
		MS27486	POTTING BOOT
		MIL-C-24308	POTTING SHELL
SHIELD	078021	MS24132	MIL-C-28748 TO 26 CONTACTS
		MS24133	TO 75 CONTACTS
		MIL-C-24308	CABLE CLAMP
		MIL-C-39012	COAXIAL
TRANSITION, CABLE ASSEMBLY	078023	MS3184	BREAKOUT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-C-83723	Connector, Electrical, (Circular, Environment Resisting), Receptacles and Plugs, General Specification For

STANDARDS

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-454	Standard General Requirements for Electronic Equipment
MIL-STD-810	Environmental Test Methods
MIL-STD-1285	Marking of Electric and Electronic Parts
MIL-STD-1344	Test Methods for Electrical Connectors
MIL-STD-1523	Age Control of Age-Sensitive Elastomeric Materials
MS3437	Backshell, Straight, Cable Sealing and Shield Termination

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTME380 Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Connector Accessories.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for Connector Accessories, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Connector Accessories.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Connector Accessories.

4.3.2 Illustrations. Illustrations applicable to Connector Accessories are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table II provides codes for column headings which may be used for Connector Accessories characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE II. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1565	SHELL SIZE	1573	CONN PART NUMBER	1575	CONNECTOR SERIES
1789	TUBE SIZE	1790	TUBE NOM ID (IN.)	1792	TUBE NOM ID (MM)
1794	ILL. NO.	1810	CONVOLUTED TUBE TYPE	1814	SHRINK TUBE TYPE
2120	TYPE	2122	SERIES	2124	CLASS
2126	FINISH	2128	STYLE	2136	CURRENT RATING AMPERES
2138	VOLTAGE RATING AMPERES	7071	MAXIMUM WEIGHT GRAMS	7072	MAXIMUM WEIGHT OUNCES

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

5.5 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.5.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.5.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.5.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT	0700
ONE SECTION DOCUMENT	0900
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
ACCESSORY REFERENCE PART NUMBER	
(PART NUMBER)	1562
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6874 THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).

0107

0108 0108.

SCOPE.

SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.

ACCESSORY REFERENCE PART NUMBER.

1562 THE REFERENCE PART NUMBER 1562 SHALL APPLY. THE ACCESSORY REFERENCE PART NUMBER IS THE COMPLETE NUMBER USED BY THE MILITARY TO IDENTIFY A PART. THIS REFERENCE PART NUMBER IS USED HERE TO IDENTIFY A SIMILAR OR COMMON PART TO WHICH EXCEPTION IS BEING TAKEN.

PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.

PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942
TEMPERATURE RATING	
MAXIMUM STORAGE (DEGREES CELSIUS)	7302
MAXIMUM SERVICE (DEGREES CELSIUS)	4905
MINIMUM STORAGE (DEGREES CELSIUS)	7301
MINIMUM SERVICE (DEGREES CELSIUS)	4904
ALTITUDE RATING	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5060
SEA LEVEL TO (METERS)	5061
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5062
SEA LEVEL TO (METERS)	5063

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6941	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.
6942	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.
	TEMPERATURE RATING.
7302	THE MAXIMUM STORAGE TEMPERATURE RATING SHALL BE 7302 DEGREES CELSIUS.
4905	THE MAXIMUM SERVICE TEMPERATURE RATING SHALL BE 4905 DEGREES CELSIUS.
7301	THE MINIMUM STORAGE TEMPERATURE RATING SHALL BE 7301 DEGREES CELSIUS.
4904	THE MINIMUM SERVICE TEMPERATURE RATING SHALL BE 4904 DEGREES CELSIUS.
	ALTITUDE RATING.
5060	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5060 FEET.
5061	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5061 METERS.
5062	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5062 FEET.
5063	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5063 METERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION	
IN ACCORDANCE WITH THE BASE DOCUMENT	
TYPE (DESIGNATION)	2120
FINISH (DESIGNATION)	2126
SERIES (DESIGNATION)	2122
CONNECTOR SHELL SIZE (DESIGNATION)	1565
STYLE (DESIGNATION)	2128
ILLUSTRATION (DESIGNATION)	1794
CLASS (DESIGNATION)	2124
RATINGS	
CONTACT CURRENT (AMPERES)	2136
CONTACT VOLTAGE (VOLTS)	2138
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
*UNITS (SELECT ONE)	
U.S.	
INCHES.	7572
SI	
MILLIMETERS.	7577

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
	CLASSIFICATION.
2120	TYPE 2120 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
2126	FINISH 2126 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
2122	SERIES 2122 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1565	ACCESSORY SHALL BE FOR USE ON A SHELL SIZE 1565 CONNECTOR IN ACCORDANCE WITH THE BASE DOCUMENT.
2128	STYLE 2128 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1794	ILLUSTRATION 1794 SHALL APPLY.
2124	CLASS 2124 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
	RATINGS.
2136	CONTACT CURRENT RATING SHALL BE 2136 AMPERE(S).
2138	CONTACT VOLTAGE RATING SHALL BE 2138 VOLT(S).
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950
NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.	
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	
MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE IX IS USED.	
METALS	
DISSIMILAR METALS.	7580

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITIIN OF PARAMETERS.
	MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
	FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
7580	METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION	
CONNECTOR IDENTIFICATION	
ACCESSORY FOR CONNECTOR (PART NUMBER)	1573
CONNECTOR (DOC DES)	1574
SERIES (DESIGNATION)	1575
VENDOR (FSCM)	1582
ATTACHMENT PURPOSE (NAME)	1808
TUBING ATTACHMENT	
CONVOLUTED TUBING	
(TYPE)	1810
(DOC DES)	1812
HEAT SHRINKABLE	
(TYPE)	1814
(DOC DES)	1816
TUBING SIZE (SELECT ONE)	
NOMINAL ID (SELECT ONE)	
(INCHES)	1790
(MILLIMETERS)	1792
SIZE (DESIGNATION)	1789

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	DESIGN AND CONSTRUCTION.
	CONNECTOR IDENTIFICATION.
1573	ACCESSORY SHALL BE FOR USE WITH A CONNECTOR PART NUMBER 1573.
1574	CONNECTOR SHALL BE IN ACCORDANCE WITH 1574.
1575	SERIES 1575 SHALL APPLY.
1582	CONNECTOR VENDOR FSCM SHALL BE 1582.
1808	ACCESSORY SHALL BE FOR ATTACHMENT OF 1808 TO THE CONNECTOR.
	TUBING ATTACHMENT.
1810	TUBING SHALL BE CONVOLUTED TUBING TYPE 1810.
1812	CONVOLUTED TUBING SHALL BE IN ACCORDANCE WITH 1812.
1814	TUBING SHALL BE HEAT SHRINKABLE TYPE 1814.
1816	HEAT SHRINKABLE TUBING SHALL BE IN ACCORDANCE WITH 1816.
1790	PART SHALL BE FOR ATTACHMENT OF TUBING SIZE 1790 INCH(S) NOMINAL ID.
1792	PART SHALL BE FOR ATTACHMENT OF TUBING SIZE 1792 MILLIMETER(S) NOMINAL ID.
1789	PART SHALL BE FOR ATTACHMENT OF TUBING SIZE 1789.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
WEIGHT	
MAXIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024
CABLE PULL-OUT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1681
NO EVIDENCE OF PHYSICAL DAMAGE.	1782
NO DISCONTINUITY.	3136
MAXIMUM LINEAR MOTION (SELECT ONE)	
(INCHES)	1683
(MILLIMETERS)	1684

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7023	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).
7021	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7024 KIKOGRAM(S).
1681	CABLE PULL-OUT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1681.
1782	CABLE PULL-OUT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
3136	THERE SHALL BE NO DISCONTINUITY.
1683	THE LINEAR MOTION OF THE CABLE WITH RESPECT TO THE CLAMP SHALL BE NOT GREATER THAN 1683 INCH(S).
1684	THE LINEAR MOTION OF THE CABLE WITH RESPECT TO THE CLAMP SHALL BE NOT GREATER THAN 1684 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CABLE PULL-OUT (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1661
PER MIL-STD-1344, METHOD 2009.	2260
*TEST CONDITION (LETTER)	2262
CABLE (DESIGNATION)	2264
CABLE SEAL FLEXING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2266
NO EVIDENCE OF SEAL DAMAGE.	2268
NO EVIDENCE OF DIELECTRIC BREAKDOWN.	2270
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2272
NO SHORTING.	2274
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY.	2276
MAXIMUM (MICROSECONDS)	2278

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1661	CABLE PULL-OUT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1661.
2260	CABLE PULL-OUT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2009 OF MIL-STD-1344.
2262	TEST CONDITION LETTER 2262 SHALL APPLY.
2264	THE CABLE TO BE USED SHALL BE 2264.
2266	CABLE SEAL FLEXING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2266.
2268	CABLE SEAL FLEXING. THERE SHALL BE NO EVIDENCE OF DAMAGE WHICH COULD ALLOW UNDESIRED SUBSTANCES TO ENTER THE INSULATION AND TO CAUSE DETERIORATION OF ELECTRICAL PERFORMANCE.
2270	THERE SHALL BE NO EVIDENCE OF DIELECTRIC BREAKDOWN.
2272	THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 2272 MEGOHM(S).
2274	THERE SHALL BE NO EVIDENCE OF SHORTING BETWEEN CONDUCTORS.
2276	THERE SHALL BE NO EVIDENCE OF DISCONTINUITY.
2278	DISCONTINUITY SHALL BE NOT GREATER THAN 2278 MICROSECOND(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CABLE SEAL FLEXING (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2280
PER MIL-STD-1344, METHOD 2017.	2282
PROCEDURE I.	2284
MINIMUM ROLLER DIAMETER (SELECT ONE)	
(INCHES)	2286
(MILLIMETERS)	2288
MINIMUM DIMENSION X (SELECT ONE)	
(INCHES)	2290
(MILLIMETERS)	2292
CYCLE RATE (CYCLES PER MINUTE)	2294
NUMBER OF CYCLES (QUANTITY)	2296
CABLE (DESIGNATION)	2298
CHAIN TENSILE STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1721
WITHSTAND PULL WITHOUT EVIDENCE OF DAMAGE.	1722

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2280	CABLE SEAL FLEXING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2280.
2282	CABLE SEAL FLEXING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2017 OF MIL-STD-1344.
2284	TEST PROCEDURE I SHALL APPLY.
2286	THE ROLLER DIAMETER SHALL BE NOT LESS THAN 2286 INCH(S).
2288	THE ROLLER DIAMETER SHALL BE NOT LESS THAN 2288 MILLIMETER(S).
2290	DIMENSION X BETWEEN THE NEAREST END OF INTERNAL CABLE CLAMP AND ROLLER CENTERLINE SHALL BE NOT LESS THAN 2290 INCH(S).
2292	DIMENSION X BETWEEN THE NEAREST END OF INTERNAL CABLE CLAMP AND ROLLER CENTERLINE SHALL BE NOT LESS THAN 2292 MILLIMETER(S).
2294	CYCLING RATE SHALL BE APPROXIMATELY 2294 CYCLES PER MINUTE.
2296	THERE SHALL BE 2296 CYCLES PERFORMED.
2298	THE CABLE TO BE USED SHALL BE 2298.
1721	CHAIN TENSILE STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1721.
1722	CHAIN TENSILE STRENGTH. THE CHAIN SHALL WITHSTAND THE TENSILE PULL WITHOUT EVIDECNE OF DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CHAIN TENSILE STRENGTH (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1711
PER DOCUMENT (DOC DES)	2300
TENSILE PULL (SELECT ONE)	
(POUNDS)	1713
(NEWTONS)	1714
DIRECTION (SELECT ONE)	
IN AXIS OF FASTENER.	1716
RIGHT ANGLE TO AXIS OF FASTENER.	1717
DURATION (MINUTES)	1715
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4908
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4906

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1711	CHAIN TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1711.
2300	CHAIN TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2300.
1713	A TENSILE PULL OF 1713 POUND(S) SHALL BE APPLIED TO THE END OF THE COVER CHAIN.
1714	A TENSILE PULL OF 1714 NEWTON(S) SHALL BE APPLIED TO THE END OF THE COVER CHAIN.
1716	THE DIRECTION OF PULL SHALL BE WITH THE AXIS OF THE CHAIN IN THE SAME AXIS AS THAT OF THE FASTENER.
1717	THE DIRECTION OF PULL SHALL BE WITH THE AXIS OF THE CHAIN AT RIGHT ANGLES TO THE AXIS OF THE FASTENER.
1715	THE DURATION OF PULL SHALL BE 1715 MINUTE(S).
4908	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4908.
4906	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAK CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN. (CONT)	
MAXIMUM LEAKAGE (MILLIAMPERES)	4894
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4884
PER MIL-STD-1344, METHOD 3001.	2432
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4885
(VOLTS, AC)	4849
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4859
DURATION OF VOLTAGE APPLICATION (SECONDS)	4891
MOUNTING PER DOCUMENT (DOC DES)	6280
REGULATION OF TEST VOLTAGE (PERCENT)	6308
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4900

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4894	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4894 MILLIAMPERE(S).
4884	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4884.
2432	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3001 OF MIL-STD-1344.
4885	TEST VOLTAGE SHALL BE 4885 VOLTS, DC.
4849	TEST VOLTAGE SHALL BE 4849 VOLTS, AC.
4859	SPECIAL PREPRATION SHALL BE IN ACCORDANCE WITH 4859.
4891	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4891 SECOND(S).
6280	MOUNTING SHALL BE IN ACCORDANCE WITH 6280.
6308	REGULATION OF THE TEST VOLTAGE SHALL BE WITHIN 6308 PERCENT.
4900	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4900 KILOVOLTAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
PER MIL-STD-1344, METHOD 3001. (CONT)	
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4902
(MILLIAMPERES)	6310
TEST CONDITION NUMBER	
II.	2438
III.	2440
IV.	2442
V.	2444
VI.	2446
WIRE ENDS (SELECT ONE)	
SEALED.	2448
UNSEALED.	2450
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4874
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4856

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4902	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4902 AMPERE(S).
6310	THE SURGE CURRENT SHALL BE NOT GREATER THAN 6310 MILLIAMPERE(S).
2438	TEST CONDITION II SHALL APPLY.
2440	TEST CONDITION III SHALL APPLY.
2442	TEST CONDITION IV SHALL APPLY.
2444	TEST CONDITION V SHALL APPLY.
2446	TEST CONDITION VI SHALL APPLY.
2448	WIRE ENDS SHALL BE SEALED.
2450	WIRE ENDS SHALL BE UNSEALED.
4874	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.
4856	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE NO EVIDECNE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currenversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN. (CONT)	
MAXIMUM LEAKAGE (MILLIAMPERES)	4875
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4861
PER MIL-STD-1344, METHOD 3001, TEST CONDITION I.	2452
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4854
(VOLTS, AC)	4855
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4850
DURATION OF VOLTAGE APPLICATION (SECONDS)	4867
MOUNTING PER DOCUMENT (DOC DES)	5000
REGULATION OF TEST VOLTAGE (PERCENT)	4869
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERE)	4870

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4875	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4875 MILLIAMPERE(S).
4861	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861.
2452	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3001 OF MIL-STD-1344. TEST CONDITION I SHALL APPLY.
4854	TEST VOLTAGE SHALL BE 4854 VOLTS, DC.
4855	TEST VOLTAGE SHALL BE 4855 VOLTS, AC.
4850	SPECIAL PREPARATION OR CONDITIONS SHALL BE IN ACCORDANCE WITH 4850.
4867	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4867 SECOND(S).
5000	MOUNTING SHALL BE IN ACCORDANCE WITH 5000.
4869	REGULATION OF TEST VOLTAGE SHALL BE WITHIN 4869 PERCENT.
4870	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4870 KILOVOLTAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
PER MIL-STD-1344, METHOD 3001, TEST CONDITION I. (CONT)	
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4717
(MILLIAMPERES)	4897
METHOD OF VOLTAGE CONNECTION PER DOCUMENT (DOC DES)	6267
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4760
FUNGUS RESISTANT BY CERTIFICATION OR BY TEST.	4761
NO EVIDENCE OF FUNGUS GROWTH WHEN TESTED.	4762
REQUIREMENT 4 OF MIL-STD-454.	2536

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4717	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4717 AMPERE(S).
4897	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4897 MILLIAMPERE(S).
6267	METHOD OF CONNECTION OF TEST VOLTAGE SHALL BE IN ACCORDANCE WITH 6267.
4760	FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.
4761	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNALS MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED, THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4762	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
2536	FUNGUS. MATERIALS OF CONSTRUCTION FOR THE ACCESSORY SHALL BE NONNUTRIENT FOR FUNGUS AS SPECIFIED IN REQUIREMENT 4 OF MIL-STD-454. CERTIFICATION OF THIS REQUIREMENT SHALL BE PROVIDED BY THE MANUFACTURER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FUNGUS (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4754
PER MIL-STD-810, METHOD 508.	4755
TEST PERIOD (DAYS)	4756
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4798
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	4799
NO DEGRADATION OF PERFORMANCE.	4815
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1477
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4788
PER MIL-STD-1344, METHOD 1002.	2550
PROCEDURE TYPE (SELECT ONE)	
TYPE I.	2552

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
4754	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.
4755	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.
4756	TEST PERIOD SHALL BE 4756 DAY(S).
4798	HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.
4799	HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
4815	THERE SHALL BE NO DEGRADATION OF PERFORMANCE.
1477	THERE SHALL BE NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DIELECTRIC WITHSTANDING VOLTAGE IS PERFORMED.
4788	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.
2550	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1002 OF MIL-STD-1344.
2552	PROCEDURE TYPE I SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
PROCEDURE TYPE (CONT)	
TYPE II.	2554
STEP 7A NOT REQUIRED.	2556
TYPE III.	2557
STEP 7A NOT REQUIRED.	2560
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1380
AS FOLLOWS:	6359
*MINIMUM INSULATION RESISTANCE (SELECT ONE)	
SINGLE TEST	
(MEGOHMS)	1386
MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	1384
*SECOND TEST (MEGOHMS)	1387
NO EVIDENCE OF PHYSICAL DAMAGE.	1407

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2554	PROCEDURE TYPE II SHALL APPLY.
2556	STEP 7A SHALL NOT APPLY.
2558	PROCEDURE TYPE III SHALL APPLY.
2560	STEP 7A SHALL NOT APPLY.
1380	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.
6359	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1386	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 1386 MEGOHM(S).
1384	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1384 MEGOHM(S) AT THE FIRST TEST TEMPERATURE.
1387	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1387 MEGOHM(S) AT THE SECOND TEST TEMPERATURE.
1407	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1371
PER MIL-STD-1344, METHOD 3003.	2590
TEST VOLTAGE (VOLTS, DC)	1373
ELECTRIFICATION TIME (SECONDS)	1376
MAXIMUM MEASUREMENT ERROR AT REQUIRED VALUE (PERCENT)	1377
SPECIAL PREPARATIONS OR CONDITIONS PER DOCUMENT (DOC DES)	1520
FIRST TEST TEMPERATURE (DEGREES CESLIUS)	1372
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	1381
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1383
TEST SPECIMEN (SELECT ONE)	
ATTACHED TO FULLY ASSEMBLED CONNECTOR.	2592
ACCESSORY ONLY.	2594
SPECIAL PREPARATIONS ____	2596

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1371	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.
2590	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3003 OF MIL-STD-1344.
1373	TEST POTENTIAL SHALL BE 1373 VOLTS, DC.
1376	ELECTRIFICATION DURATION SHALL BE 1376 SECOND(S).
1377	THE MEASUREMENT ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1377 PERCENT.
1520	SPECIAL PREPARATIONS OR CONDITIONS SHALL BE IN ACCORDANCE WITH 1520.
1372	FIRST TEST TEMPERATURE SHALL BE 1372 DEGREES CELSIUS.
1381	SECOND TEST TEMPERATURE SHALL BE 1381 DEGREES CELSIUS.
1383	TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1383 DEGREES CELSIUS.
2592	TEST SPECIMEN SHALL BE ATTACHED TO A FULLY ASSEMBLED CONNECTOR.
2594	TEST SPECIMEN SHALL BE THE ACCESSORY ONLY.
2596	SPECIAL PREPARATIONS SHALL BE 2596.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAGNETIC PERMEABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1796
MAXIMUM PERMEABILITY (MU)	1590
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1798
PER MIL-STD-1344, METHOD 3006.	2606
TEST SPECIMEN (SELECT ONE)	
ATTACHED TO A FULLY ASSEMBLED CONNECTOR.	2608
ACCESSORY ONLY.	2610
OZONE EXPOSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1800
NO CRACKING OF DIELECTRIC OR PERFORMANCE DEGRADATION.	1802
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1804

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1796	MAGENTIC PERMEABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1796
1590	MAGNETIC PERMEABILITY. THE PERMEABILITY SHALL BE NOT GREATER THAN 1590 MU.
1798	MAGNETIC PERMEABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1798.
2606	MAGNETIC PERMEABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3006 OF MIL-STD-1344.
2608	TEST SPECIMEN SHALL BE ATTACHED TO A FULLY ASSEMBLED CONNECTOR.
2610	TEST SPECIMEN SHALL BE THE ACCESSORY ONLY.
1800	OZONE EXPOSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1800.
1802	OZONE EXPOSURE. THE CONNECTOR SHALL SHOW NO EVIDENCE OF CRACKING OF DIELECTRIC MATERIAL OR OTHER DAMAGE DUE TO OZONE EXPOSURE THAT WILL ADVERSELY AFFECT PERFORMANCE.
1804	OZONE EXPOSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1804.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OZONE EXPOSURE (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-1344, METHOD 1007.	2694
OZONE CONCENTRATION BY VOLUME	
MINIMUM (PARTS PER MILLION)	2696
MAXIMUM (PARTS PER MILLION)	2698
EXPOSURE DURATION (HOURS)	1806
CHAMBER TEMPERATURE (DEGREES CELSIUS)	2700
TOLERANCE (DEGREES CELSIUS)	2702
SALT SPRAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4878
NO EVIDENCE OF EXCESSIVE CORROSION, WARPING OR CRACKING.	2772
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4770

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2694	OZONE EXPOSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1007 OF MIL-STD-1344.
2696	OZONE CONCENTRATION SHALL BE NOT LESS THAN 2696 PARTS PER MILLION BY VOLUME.
2698	OZONE CONCENTRATION SHALL BE NOT GREATER THAN 2698 PARTS PER MILLION BY VOLUME.
1806	EXPOSURE DURATION SHALL BE 1806 HOUR(S).
2700	CHAMBER TEMPERATURE SHALL BE 2700 DEGREES CELSIUS.
2702	CHAMBER TEMPERATURE TOLERANCE SHALL BE 2702 DEGREES CELSIUS.
4878	SALT SPRAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4878.
2772	SALT SPRAY. THERE SHALL BE NO EVIDENCE OF EXCESSIVE CORROSION. EXCESSIVE CORROSION IS DEFINED AS THAT WHICH INTERFERES WITH THE ELECTRICAL OR MECHANICAL PERFORMANCE, OR, IN THE CASE OF PLATED METAL, CORROSION WHICH HAS PASSED THROUGH THE PLATING AND ATTACKED THE BASE METAL. THERE SHALL BE NO WARPING, CRACKING OR OTHER DAMAGE.
4770	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4770.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT SPRAY (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-1344, METHOD 1001.	2776
*TEST CONDITION (LETTER)	4772
MOUNTING (SELECT ONE)	
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4773
MOUNTING SHALL BE BY NORMAL METHOD.	4765
MOUNTING SHALL BE BY ANY SUITABLE METHOD.	4766
SHELL TO SHELL CONDUCTIVITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1601
AS FOLLOWS:	2778
MAXIMUM RESISTANCE (OHMS)	2780
MAXIMUM VOLTAGE DROP (MILLIVOLTS)	1822
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1621
PER DOCUMENT (DOC DES)	2782
APPLIED CURRENT (AMPERES)	1624
CURRENT TOLERANCE (AMPERES)	2784

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2776	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1001 OF MIL-STD-1344.
4772	TEST CONDITION LETTER 4772 SHALL APPLY.
4773	MOUNTING SHALL BE IN ACCORDANCE WITH 4773.
4765	MOUNTING SHALL BE BY THE NORMAL METHOD.
4766	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
1601	SHELL TO SHELL CONDUCTIVITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1601.
2778	SHELL TO SHELL CONDUCTIVITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2780	THE MEASURED RESISTANCE SHALL BE NOT GREATER THAN 2780 OHM(S).
1822	THE MEASURED VOLTAGE DROP SHALL BE NOT GREATER THAN 1822 MILLIVOLT(S).
1621	SHELL TO SHELL CONDUCTIVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1621.
2782	SHELL TO SHELL CONDUCTIVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2782.
1624	APPLIED CURRENT SHALL BE 1624 AMPERE(S).
2784	CURRENT TOLERANCE SHALL BE 2784 AMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, SPECIFIED PULSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1508
NO EVIDENCE OF PHYSICAL DAMAGE.	1509
NO DISENGAGEMENT OR LOOSENING OF COUPLING.	2848
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1502
PER MIL-STD-1344, METHOD 2004.	2850
*TEST CONDITION (LETTER)	1504
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	4686
NORMAL MOUNTING METHOD.	4685
MOUNT PER DOCUMENT (DOC DES)	4684
SPECIMEN (SELECT ONE)	
ATTACHED TO A FULLY ASSEMBLED CONNECTOR.	2852
ACCESSORY ONLY.	2854

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1508	SHOCK, SPECIFIED PULSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1508.
1509	SHOCK, SPECIFIED PULSE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2848	THERE SHALL BE NO DISENGAGEMENT OR LOOSENING OF THE CONNECTOR COUPLING.
1502	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1502.
2850	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2004 OF MIL-STD-1344.
1504	TEST CONDITION LETTER 1504 SHALL APPLY.
4686	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4685	MOUNTING SHALL BE BY THE NORMAL METHOD.
4684	MOUNTING SHALL BE IN ACCORDANCE WITH 4684.
2852	TEST SPECIMEN SHALL BE ATTACHED TO A FULLY ASSEMBLED CONNECTOR.
2854	TEST SPECIMEN SHALL BE THE ACCESSORY ONLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE CYCLING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2858
NO EVIDENCE OF DETRIMENTAL DAMAGE.	2860
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2866
PER MIL-STD-1344, METHOD 1003.	1775
*TEST CONDITION (LETTER)	4715
NUMBER OF CYCLES (QUANTITY)	2870
STEP 1 TEMPERATURE (DEGREES CELSIUS)	2872
PLUS TOLERANCE (DEGREES CELSIUS)	2874
MINUS TOLERANCE (DEGREES CELSIUS)	2876
STEP 3 TEMPERATURE (DEGREES CELSIUS)	2878
PLUS TOLERANCE (DEGREES CELSIUS)	2880
MINUS TOLERANCE (DEGREES CELSIUS)	2882

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2858	TEMPERATURE CYCLING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2858.
2860	TEMPERATURE CYCLING. THERE SHALL BE NO EVIDENCE OF DAMAGE DETRIMENTAL TO THE OPERATION OF THE ACCESSORY.
2866	TEMPERATURE CYCLING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2866.
1775	TEMPERATURE CYCLING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1003 OF MIL-STD-1344.
4715	TEST CONDITION LETTER 4715 SHALL APPLY.
2870	THE NUMBER OF CYCLES SHALL BE 2870.
2872	THE STEP 1 TEMPERATURE SHALL BE 2872 DEGREES CELSIUS.
2874	THE STEP 1 POSITIVE TEMPERATURE TOLERANCE SHALL BE 2874 DEGREES CELSIUS.
2876	THE STEP 1 NEGATIVE TEMPERATURE TOLERANCE SHALL BE 2876 DEGREES CELSIUS.
2878	THE STEP 3 TEMPERATURE SHALL BE 2878 DEGREES CELSIUS.
2880	THE STEP 3 POSITIVE TEMPERATURE TOLERANCE SHALL BE 2880 DEGREES CELSIUS.
2882	THE STEP 3 NEGATIVE TEMPERATURE TOLERANCE SHALL BE 2882 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE CYCLING (CONT)	
PER MIL-STD-1244, METHOD 1003. (CONT)	
MINIMUM EXPOSURE DURATIONS (SELECT ONE)	
(HOURS)	2884
(MINUTES)	2886
SPECIMEN (SELECT ONE)	
ATTACHED TO A FULLY ASSEMBLED CONNECTOR.	2888
ACCESSORY ONLY.	2890
TEMPERATURE LIFE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1701
MINIMUM FORCE TO REMOVE BOOT (SELECT ONE)	
(POUNDS)	1702
(NEWTONS)	1703
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1691

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2884	THE STEPS 2 AND 3 EXPOSURE DURATIONS SHALL BE NOT LESS THAN 2884 HOUR(S).
2886	THE STEPS 2 AND 3 EXPOSURE DURATIONS SHALL BE NOT LESS THAN 2886 MINUTE(S).
2888	TEST SPECIMEN SHALL BE ATTACHED TO A FULLY ASSEMBLED CONNECTOR.
2890	TEST SPECIMEN SHALL BE THE ACCESSORY ONLY.
1701	TEMPERATURE LIFE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1701.
1702	TEMPERATURE LIFE. THE FORCE REQUIRED TO PULL THE BOOT FROM THE CONNECTOR FROM ANY ANGLE SHALL BE NOT LESS THAN 1702 POUND(S).
1703	TEMPERATURE LIFE. THE FORCE REQUIRED TO PULL THE BOOT FROM THE CONNECTOR FROM ANY ANGLE SHALL BE NOT LESS THAN 1703 NEWTON(S).
1691	TEMPERATURE LIFE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1691.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE LIFE (CONT)	
TEST METHODS (CONT)	
PER MIL-C-83723.	1692
EXPOSURE DURATION (HOURS)	1693
TEMPERATURE (DEGREES CELSIUS)	1694
VIBRATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4681
NO EVIDENCE OF PHYSICAL DAMAGE.	4682
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY.	1374
MAXIMUM DISCONTINUITY (SELECT ONE)	
(MILLISECONDS)	1545
(MICROSECONDS)	1546
NO LOOSENING OR HARDWARE.	2916
NO DISENGAGEMENT.	2918
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1505

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1692	TEMPERATURE LIFE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-83723.
1693	EXPOSURE TIME SHALL BE 1693 HOUR(S).
1694	RATED TEMPERATURE SHALL BE 1694 DEGREES CELSIUS.
4681	VIBRATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4681.
4682	VIBRATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1374	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1545	THE DISCONTINUTIY SHALL BE NOT GREATER THAN 1545 MILLISECOND(S).
1546	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1546 MICROSECOND(S).
2916	THERE SHALL BE NO LOOSENING OF HARDWARE.
2918	THERE SHALL BE NO UNINTENDED DISENGAGEMENT.
1505	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1505.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-1344, METHOD 2005.	2920
TEST CONDITION NUMBER I.	2922
DURATION EACH DIRECTION (HOURS)	2924
TEST CONDITION NUMBER II.	2926
TEST CONDITION NUMBER III.	2928
TEST CONDITION NUMBER IV.	2930
TEST CONDITION NUMBER V.	2932
TEST CONDITION (LETTER)	2934
MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	2936
PER DOCUMENT (DOC DES)	2938
DURATION PER AXIS (SELECT ONE)	
3 MINUTES.	2940
15 MINUTES.	2942
1.5 HOURS.	2944
8 HOURS.	2946

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
2920	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2005 OF MIL-STD-1344.
2922	TEST CONDITION NUMBER I SHALL APPLY.
2924	DURATION OF VIBRATION IN EACH DIRECTION SHALL BE 2924 HOUR(S).
2926	TEST CONDITION NUMBER II SHALL APPLY.
2928	TEST CONDITION NUMBER III SHALL APPLY.
2930	TEST CONDITION NUMBER IV SHALL APPLY.
2932	TEST CONDITION NUMBER V SHALL APPLY.
2934	TEST CONDITION LETTER 2934 SHALL APPLY.
2936	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
2938	MOUNTING SHALL BE IN ACCORDANCE WITH 2938.
2940	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 3 MINUTES.
2942	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 15 MINUTES.
2944	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 1.5 HOURS.
2946	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 8 HOURS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION (CONT)	
TEST CONDITION NUMBER V. (CONT)	
DIRECTION OF MOTION (SELECT ONE)	
PERPENDICULAR TO MATING PLANE.	2948
THREE MUTUALLY PERPENDICULAR.	2950
NUMBER OF TEST POINTS (QUANTITY)	2952
TEST POINTS ____	2954
TEST CONDITION NUMBER VI.	2956
TEST CONDITION (LETTER)	2958
MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	2960
PER DOCUMENT (DOC DES)	2962
DURATION PER AXIS (SELECT ONE)	
3 MINUTES.	2964
15 MINUTES.	2966
1.5 HOURS.	2968
8 HOURS.	2970

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2948	THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE MATING PLANE OF THE CONNECTOR(S) IN NORMAL MOUNTING POSITION.
2950	THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUALLY PERPENDICULAR PLANES.
2952	THERE SHALL BE 2952 TEST POINT(S).
2954	TEST POINT(S) SHALL BE 2954.
2956	TEST CONDITION NUMBER VI SHALL APPLY.
2958	TEST CONDITION LETTER 2958 SHALL APPLY.
2960	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
2962	MOUNTING SHALL BE IN ACCORDANCE WITH 2962.
2964	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 3 MINUTES.
2966	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 15 MINUTES.
2968	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 1.5 HOURS.
2970	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 8 HOURS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION (CONT)	
TEST CONDITION NUMBER VI. (CONT)	
DIRECTION OF MOTION (SELECT ONE)	
PERPENDICULAR TO MATING PLANE.	2972
THREE MUTUALLY PERPENDICULAR	2974
NUMBER OF TEST POINTS (QUANTITY)	2976
TEST POINTS ____	2978
SPECIMEN (SELECT ONE)	
ATTACHED TO A FULLY ASSEMBLED CONNECTOR.	2980
ACCESSORY ONLY.	2982
MONITOR FOR DISCONTINUITIES.	2986
METHOD FOR DETERMINING RESONANCE ____	2988
WATER PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1651
NO EVIDENCE OF WATER ENTRANCE.	1652
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1641

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2972	THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE MATING PLANE OF THE CONNECTOR(S) IN NORMAL MOUNTING POSITION.
2974	THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUALLY PERPENDICULAR PLANES.
2976	THERE SHALL BE 2976 TEST POINT(S).
2978	TEST POINT(S) SHALL BE 2978.
2980	TEST SPECIMEN SHALL BE ATTACHED TO A FULLY ASSEMBLED CONNECTOR.
2982	TEST SPECIMEN SHALL BE THE ACCESSORY ONLY.
2986	CONNECTORS SHALL BE MONITORED FOR DISCONTINUITIES.
2988	THE METHOD FOR DETERMINING RESONANCE SHALL BE 2988.
1651	WATER PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1651.
1652	WATER PRESSURE. THE CONNECTOR AND ACCESSORY ASSEMBLY SHALL SHOW NO EVIDENCE OF WATER ENTRANCE.
1641	WATER PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1641.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WATER PRESSURE (CONT)	
TEST METHODS (CONT)	
PER MS3437.	1642
DEPTH OF IMMERSION (SELECT ONE)	
(FEET)	1643
(METERS)	2644
DURATION (HOURS)	1645
STORAGE CONDITIONS	
(YEARS)	1529
CERTIFY MAXIMUM CURE DATE TO DELIVERY (QUARTERS)	4942
CERTIFY MINIMUM SHELF LIFE AFTER DELIVERY (QUARTERS)	4943
CERTIFY MAXIMUM MANUFACTURE DATE TO DELIVERY (QUARTERS)	4944
AGE LIMITATION PER MIL-STD-1523.	5209

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1642	WATER PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MS3437.
1643	DEPTH OF IMMERSION SHALL BE 1643 FEET.
1644	DEPTH OF IMMERSION SHALL BE 1644 METER(S).
1645	DURATION OF TEST SHALL BE 1645 HOUR(S).
	STORAGE CONDITIONS.
1529	ITEMS SHALL WITHSTAND 1529 YEARS OF STORAGE WHEN PROPERLY PRESERVED, PACKAGED AND MECHANICALLY PROTECTED WITHOUT REQUIRING MAJOR REPAIR.
4942	MANUFACTURER SHALL CERTIFY THAT THE CURE DATE SHALL BE NOT GREATER THAN 4942 QUARTERS PRIOR TO DELIVERY DATE.
4943	MANUFACTURER SHALL CERTIFY THAT THERE SHALL BE NOT LESS THAN 4943 QUARTERS OF SHELF LIFE AFTER DELIVERY.
4944	MANUFACTURER SHALL CERTIFY THAT THE DATE OF MANUFACTURE SHALL BE NOT GREATER THAN 4944 QUARTERS PRIOR TO DATE OF DELIVERY.
5209	AGE LIMITATIONS OF THE FINISHED PRODUCT SHALL BE IN ACCORDANCE WITH MIL-STD-1523.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI


Project EDS-A278)

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.


APPENDIX A

ILLUSTRATIONS


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

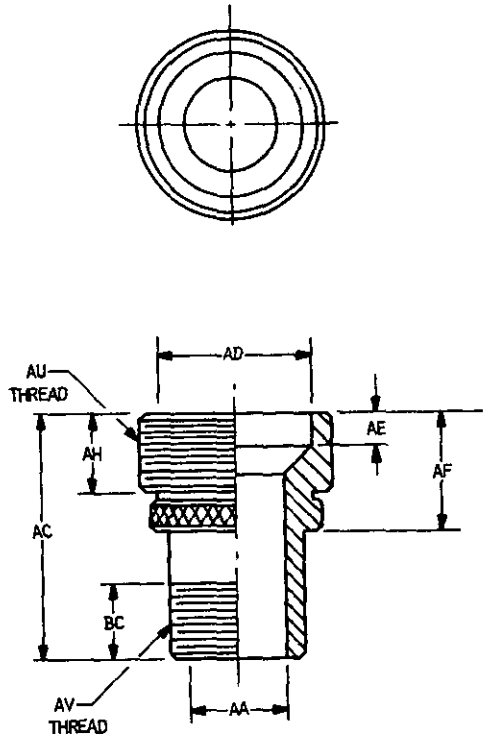



078-01-1

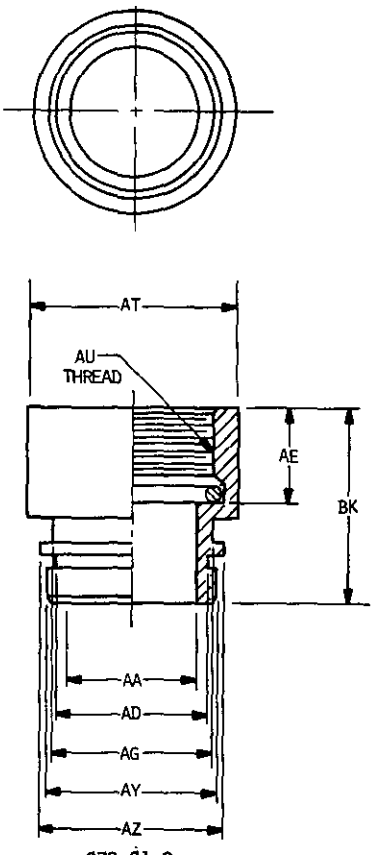

078-01-2

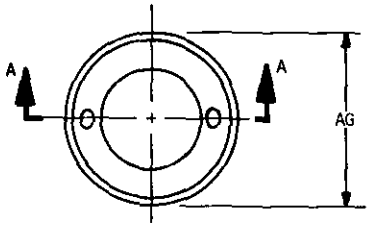


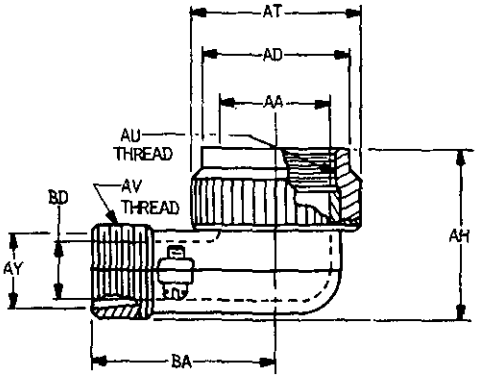




SECTION A-A

078-01-3

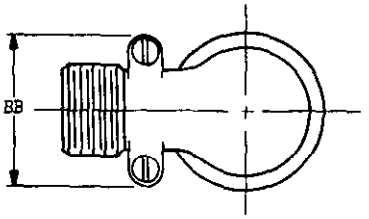


078-01-4


Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

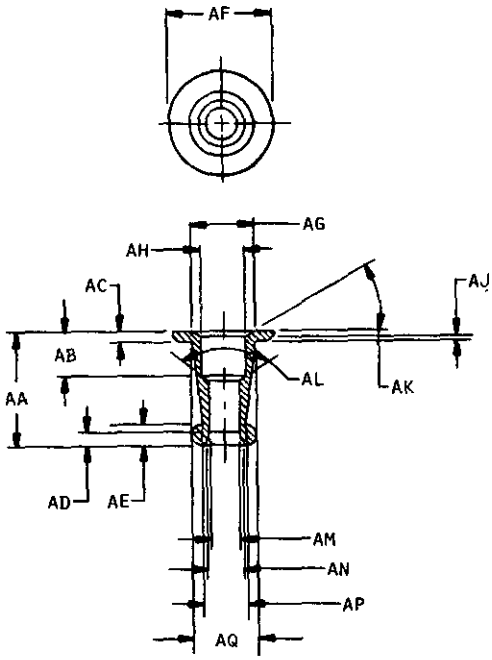

078-01-5

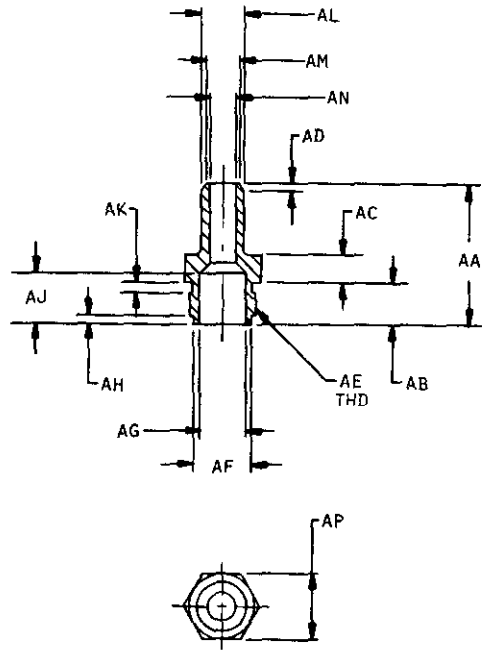


078-01-6

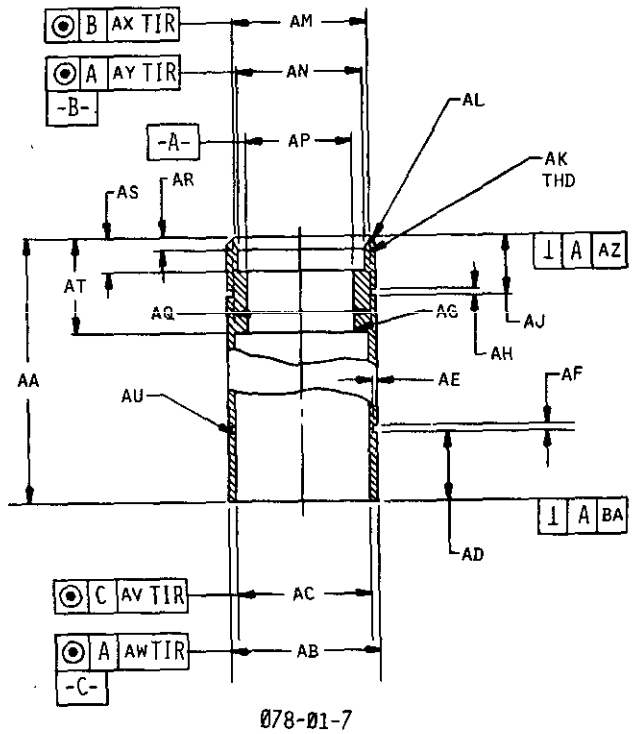



078-01-7

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

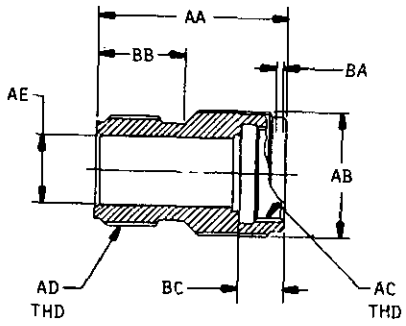


078-01-8

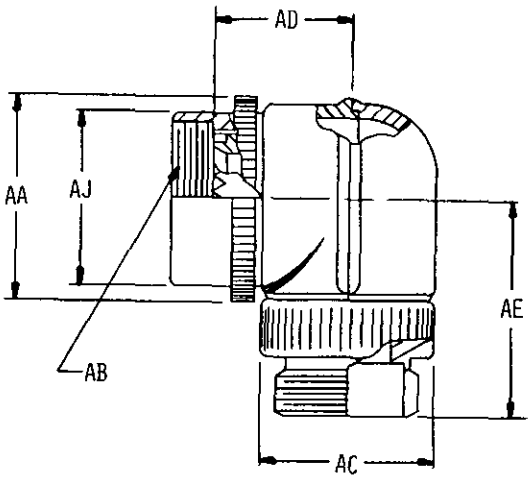


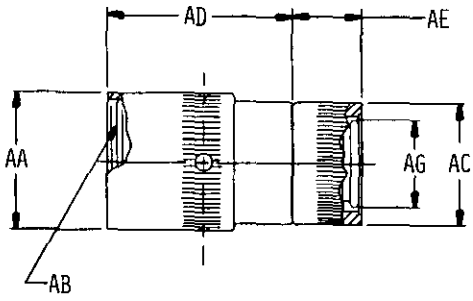

078-01-10




078-01-9

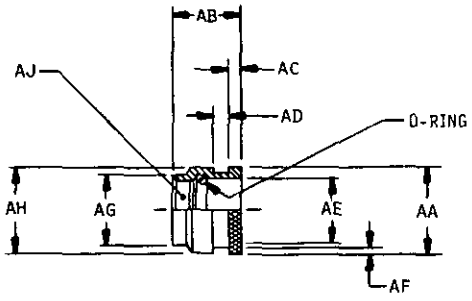


078-01-11

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

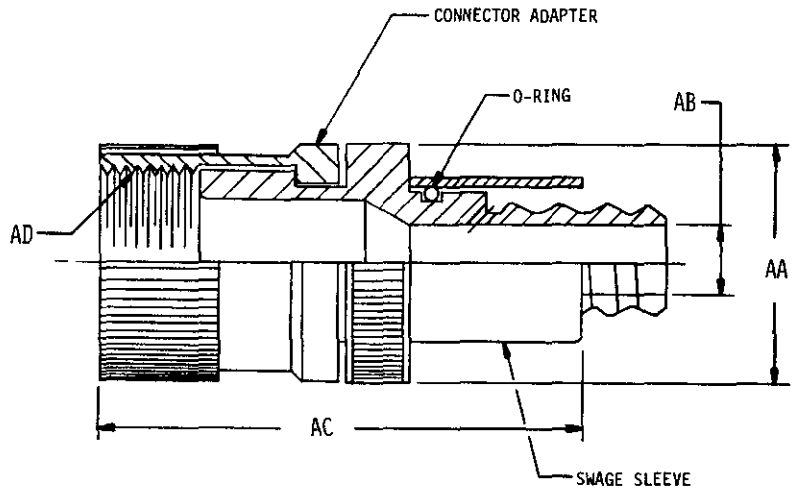


Ø78-Ø1-12

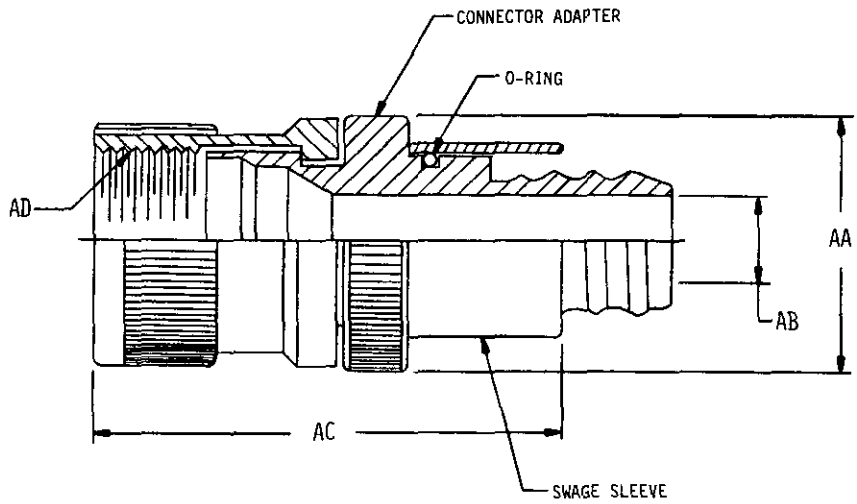


Ø78-Ø1-13


Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

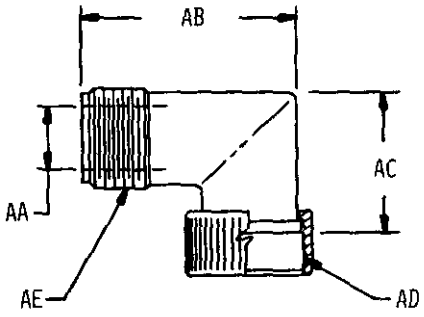

078-01-14

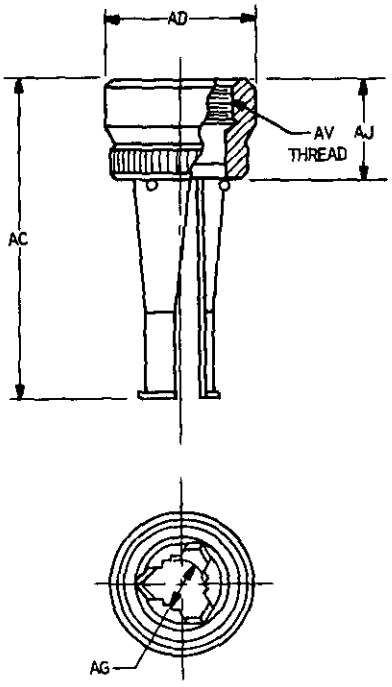


078-02-1

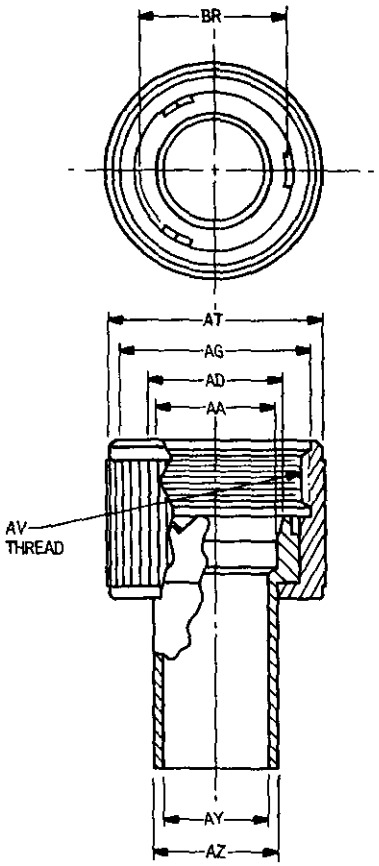


078-02-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

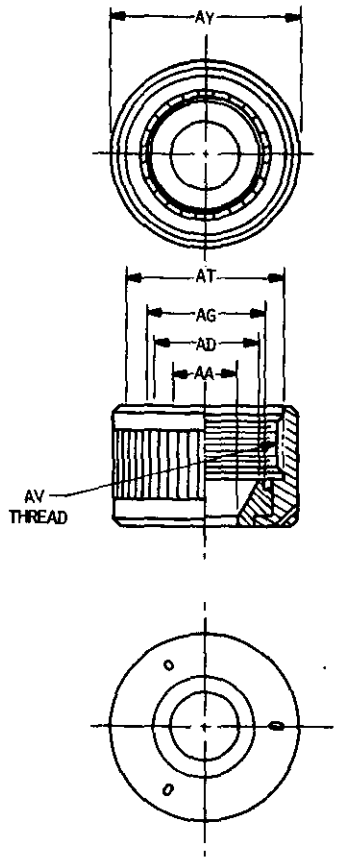


078-02-3

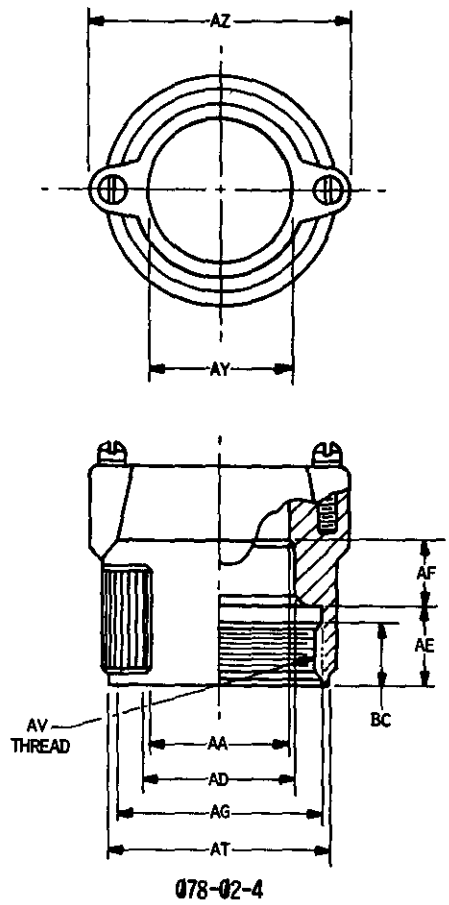


078-02-4


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

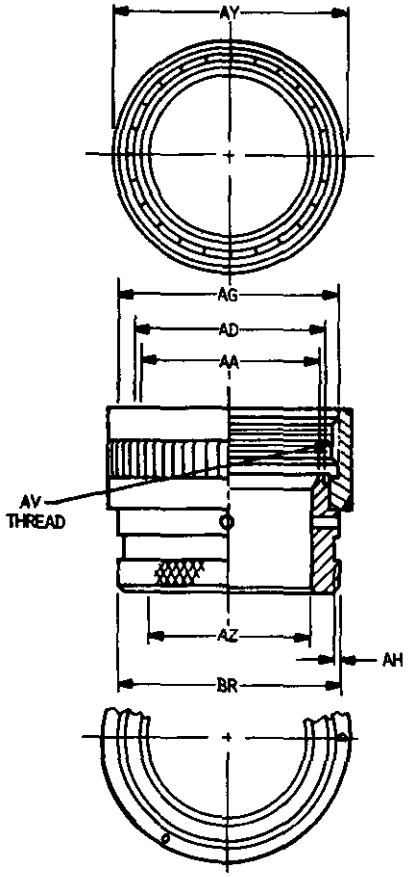


078-02-5

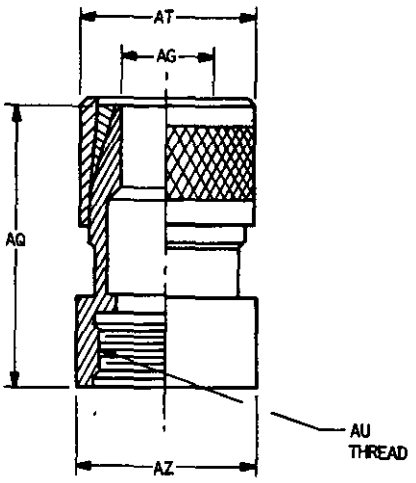


078-02-6






SECTION B-B

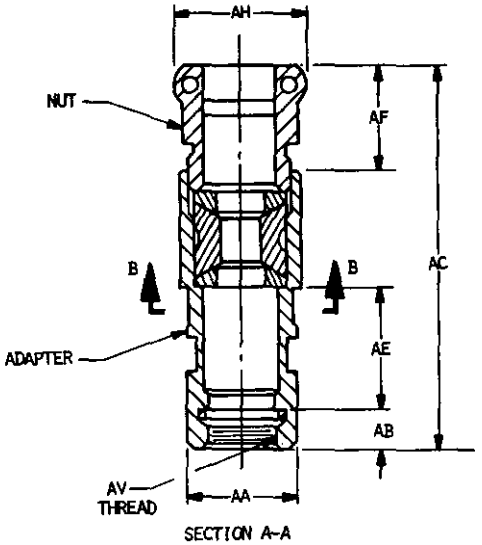



SECTION A-A

078-02-7


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.




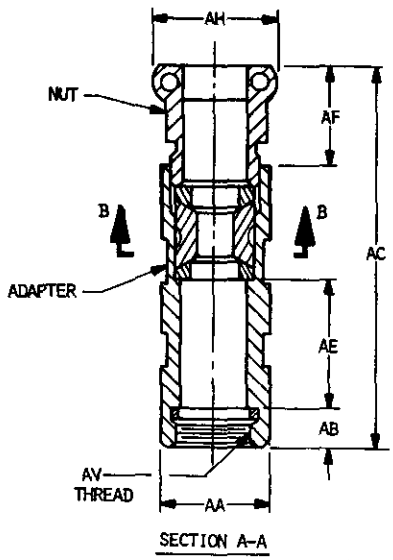




078-02-8



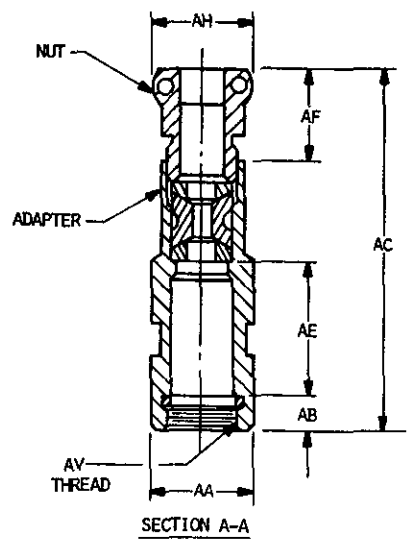


078-02-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

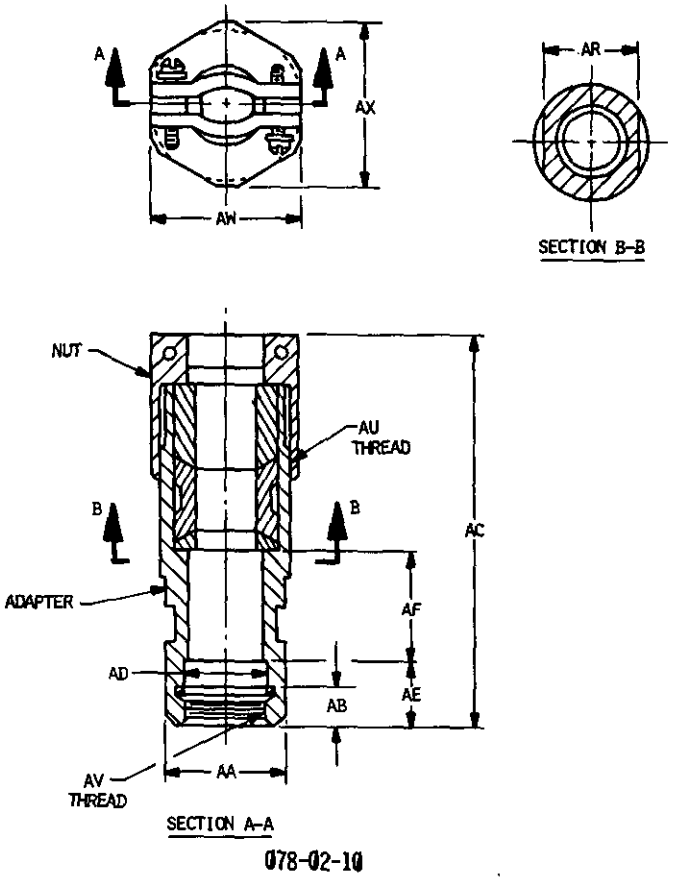


078-02-10


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

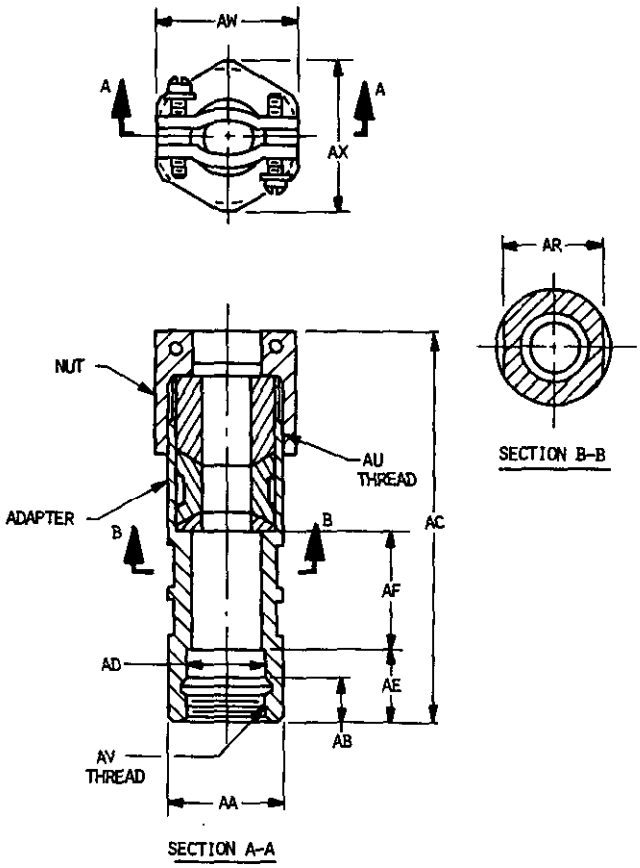


078-02-11


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.






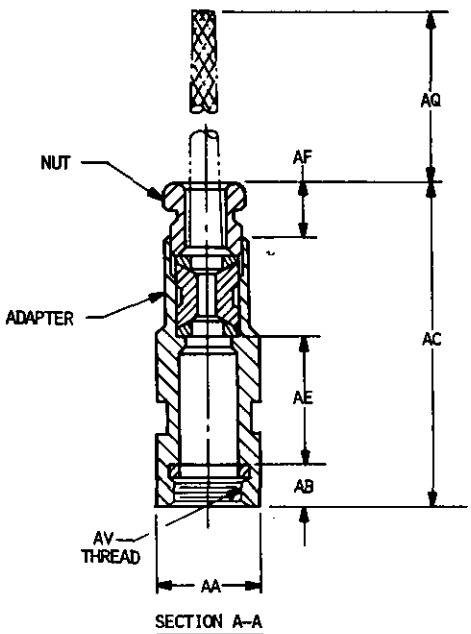


078-02-12

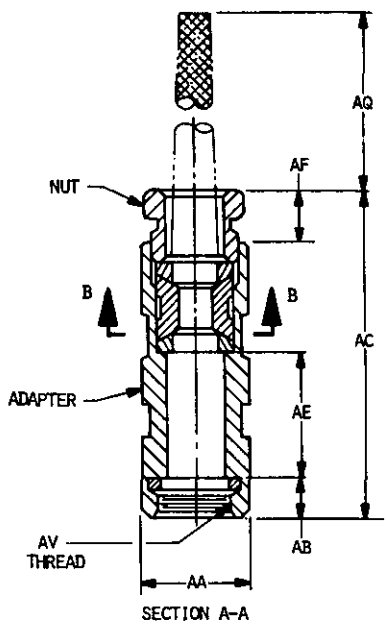

078-02-13




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

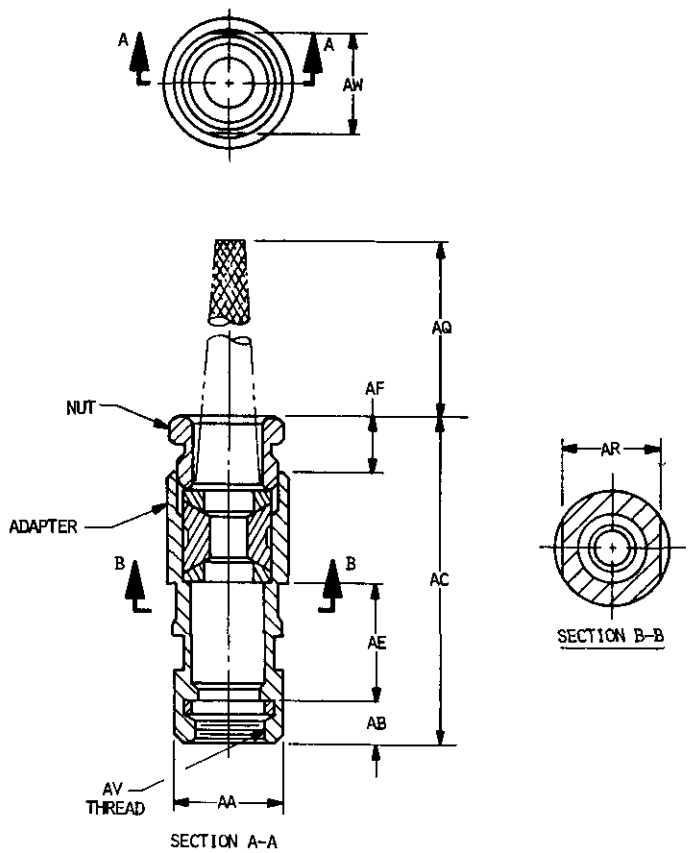


078-02-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

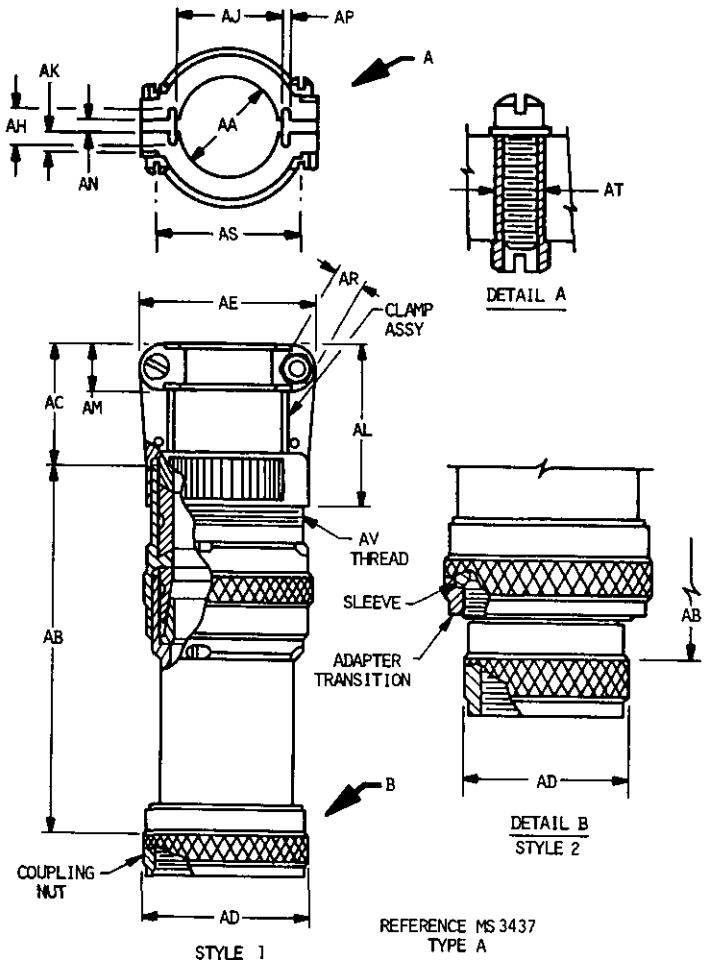


078-02-15

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

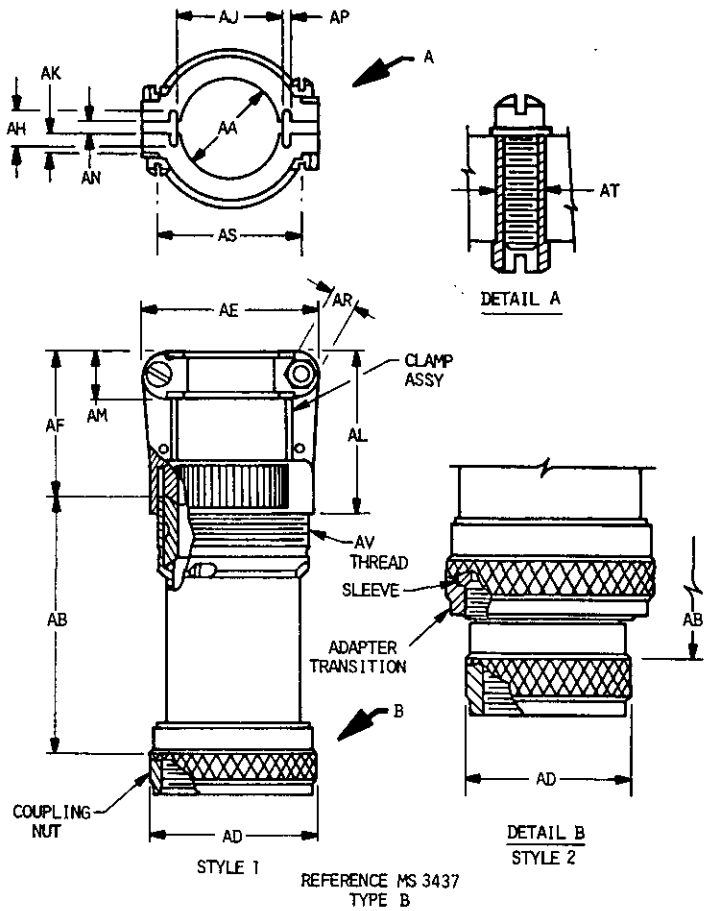


078-02-16


Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

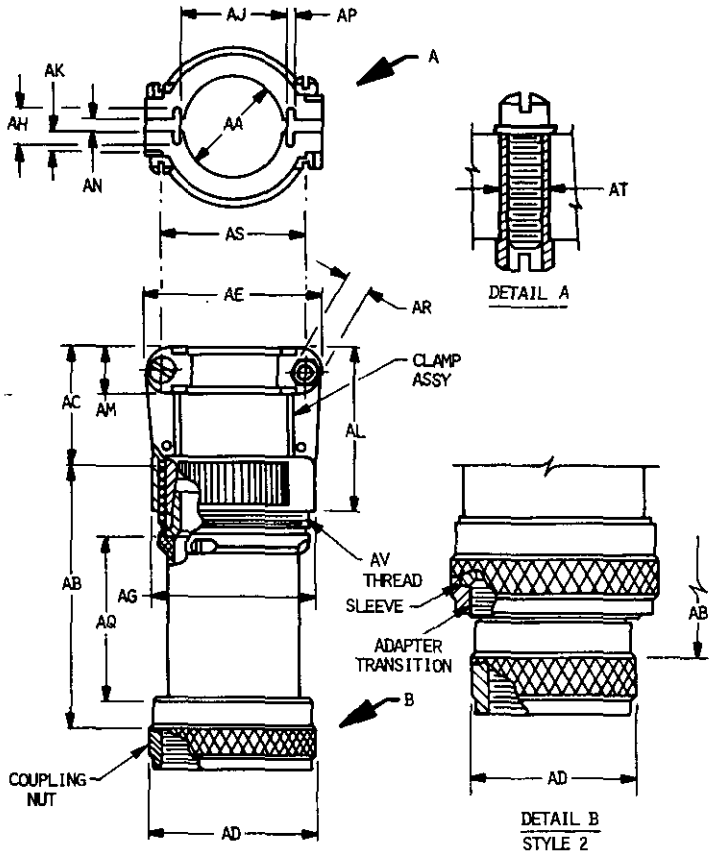


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

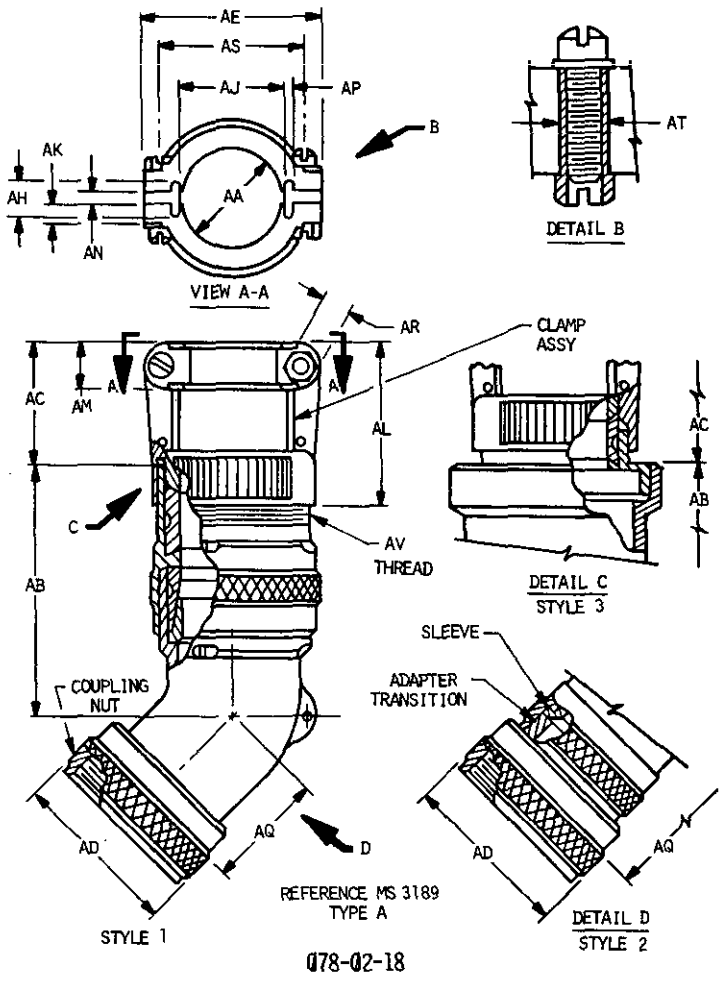

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

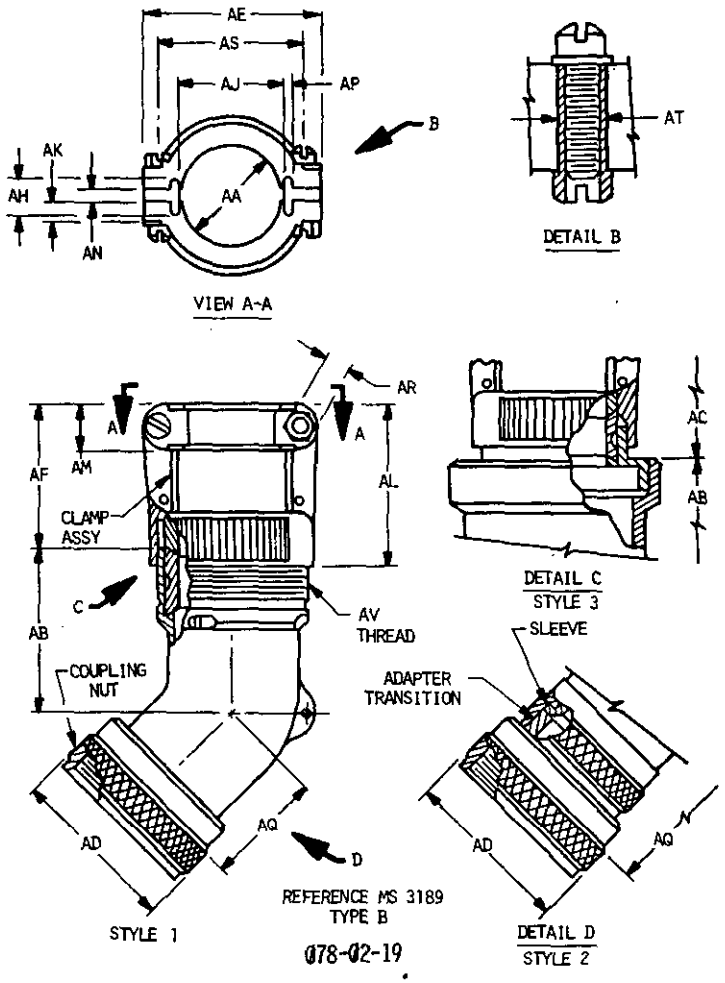


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

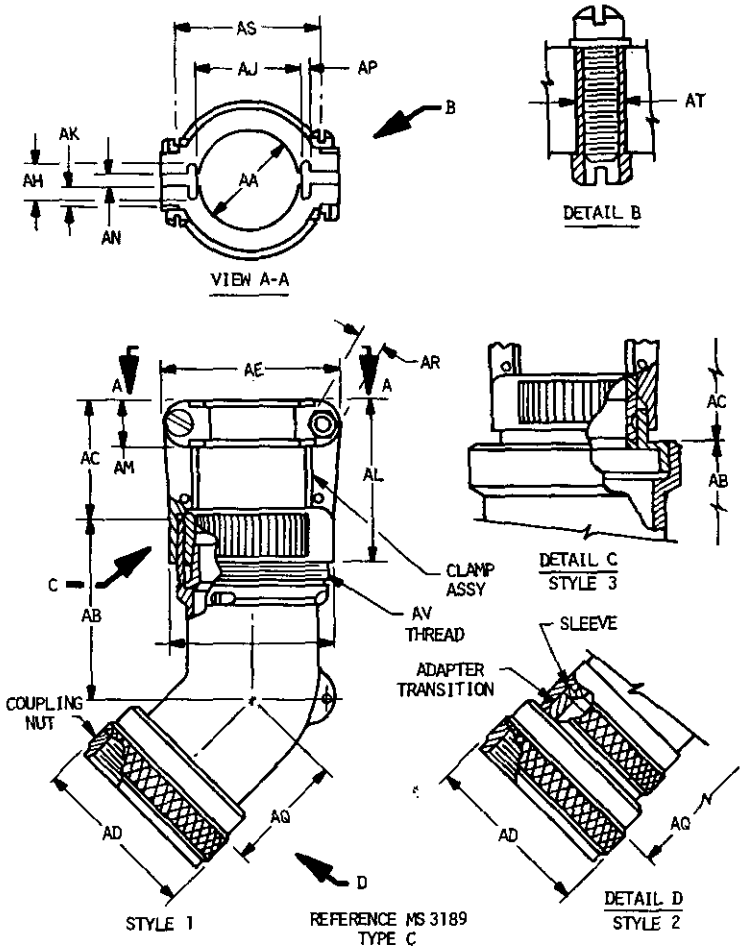


078-02-20

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

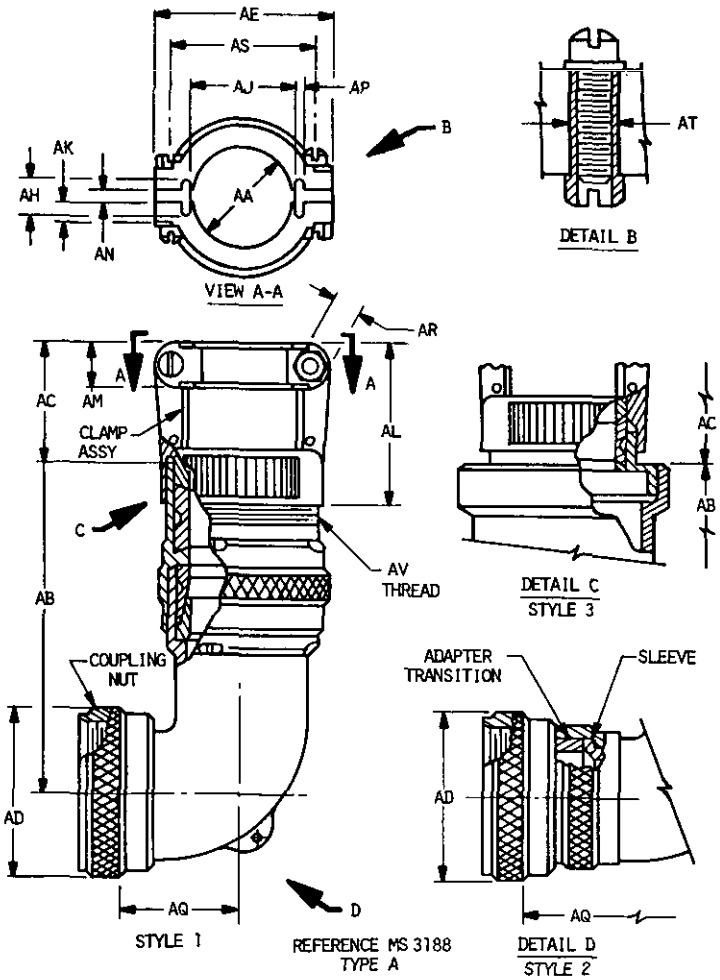


078-02-21

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

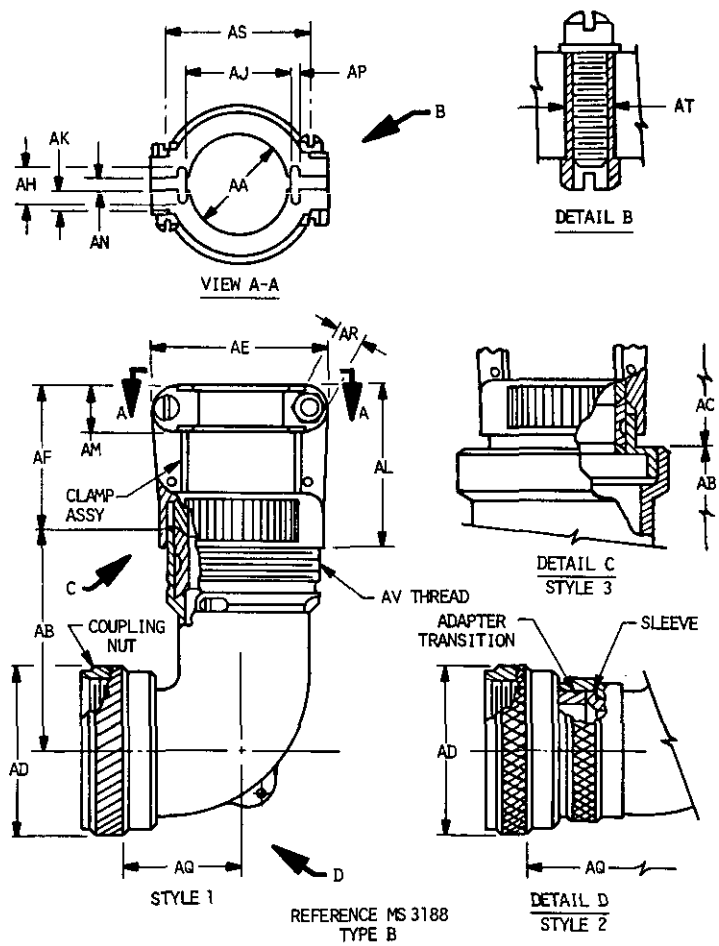


078-02-22

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

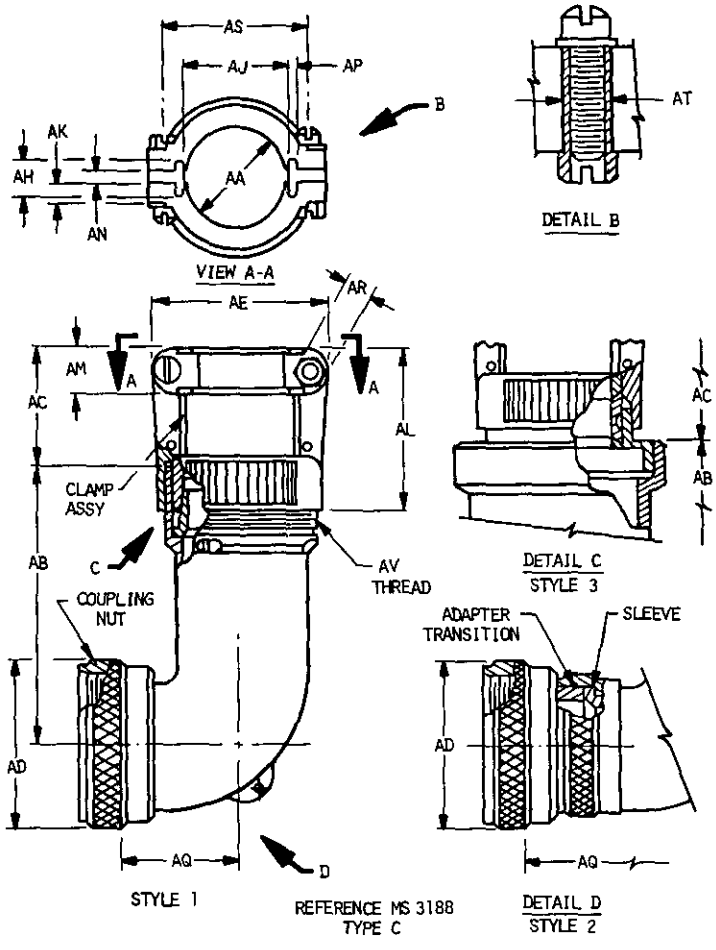



078-02-23

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

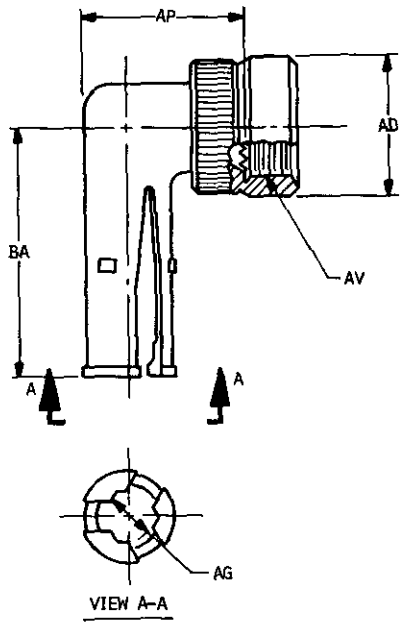


078-02-24

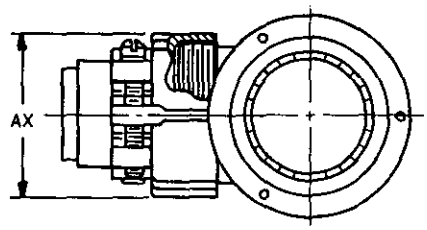


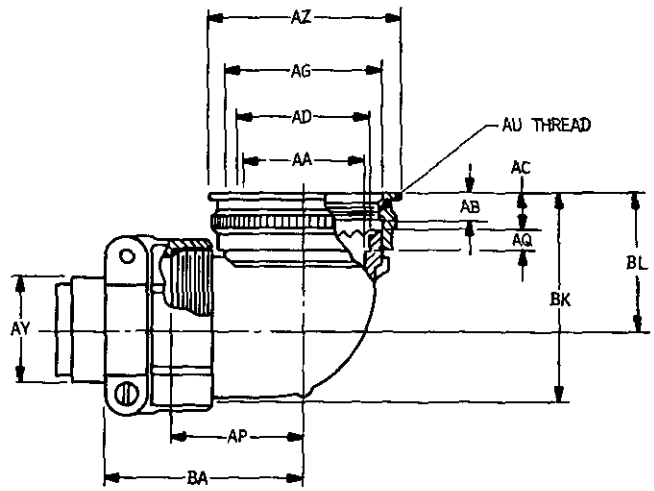

078-02-25

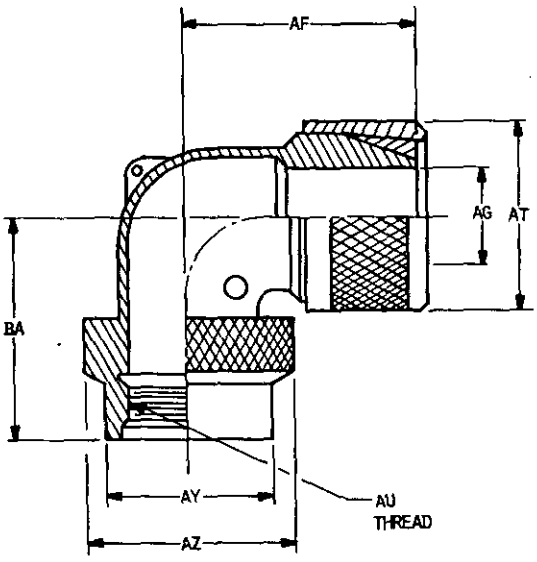


078-02-26




078-02-27


Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

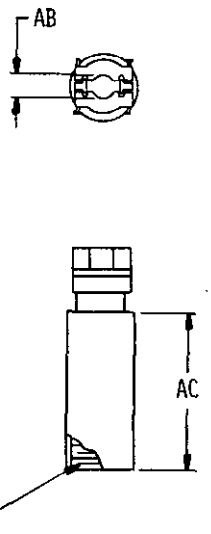


078-02-28

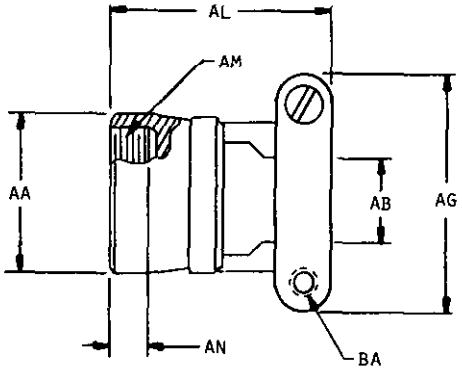


078-02-29

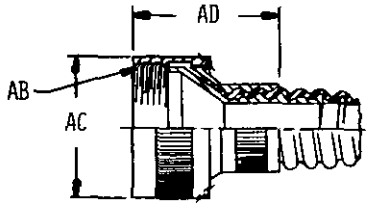

078-02-31

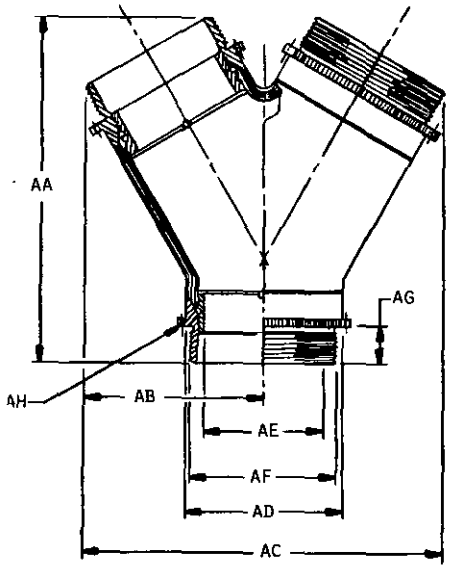


078-02-30

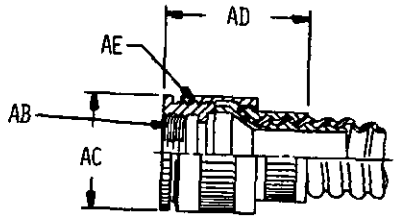


078-02-32


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

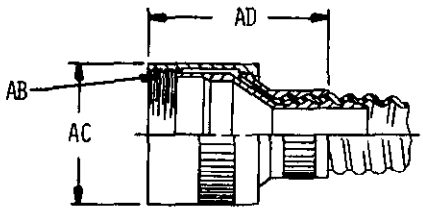

078-02-33

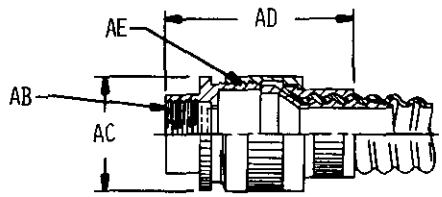


078-02-34

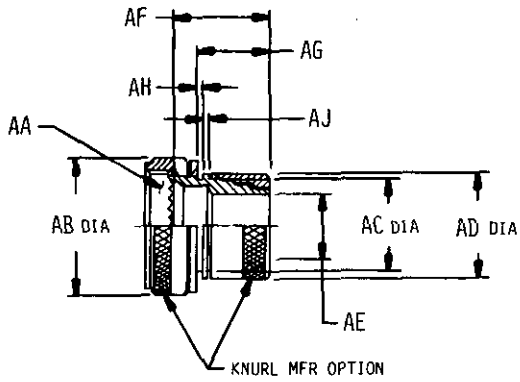


078-02-35

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.




AS SUPPLIED

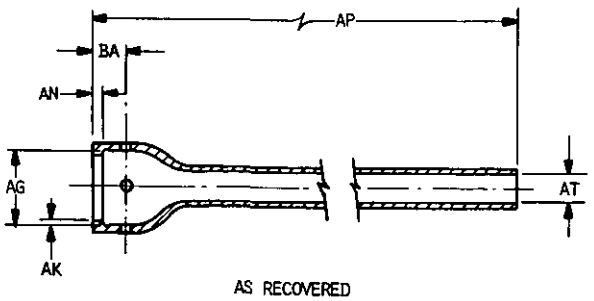


AS RECOVERED

078-03-1




AS SUPPLIED

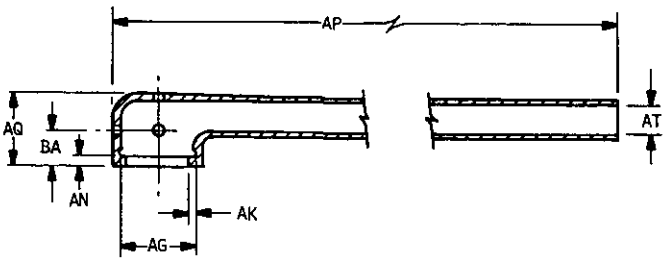


AS RECOVERED

078-03-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.





AS SUPPLIED

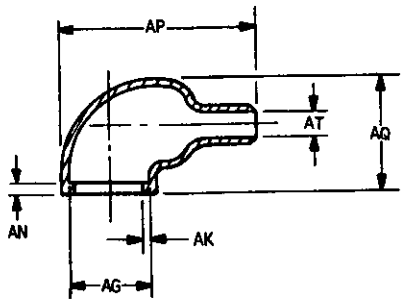


AS RECOVERED

078-03-3






078-03-4

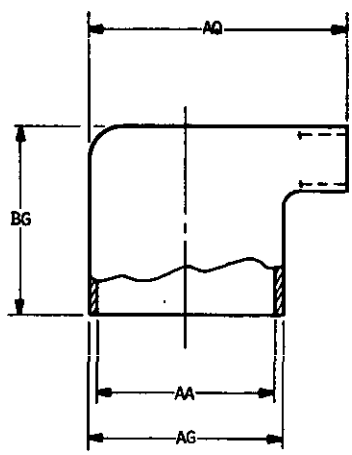

078-03-5


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

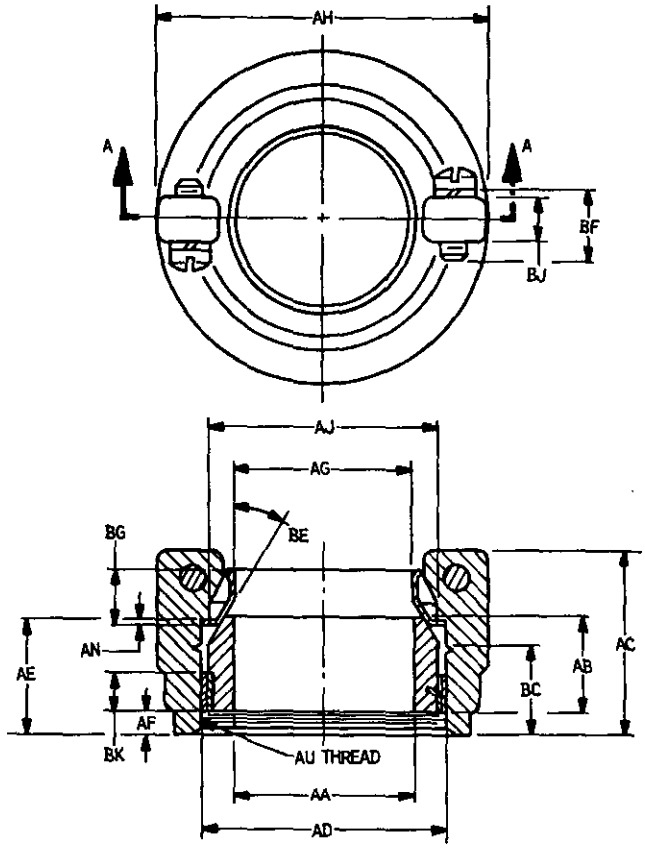

SECTION A-A

078-04-1


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

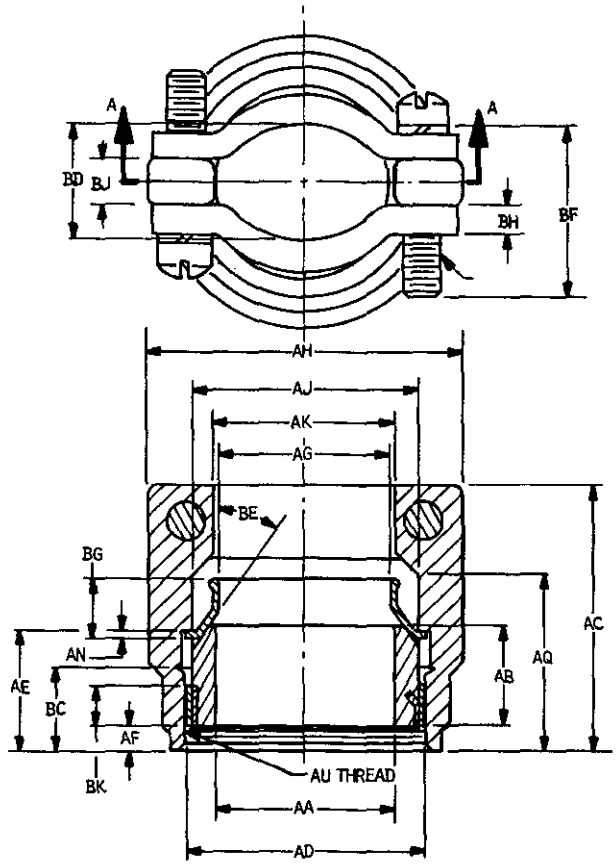


SECTION A-A


078-04-2


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

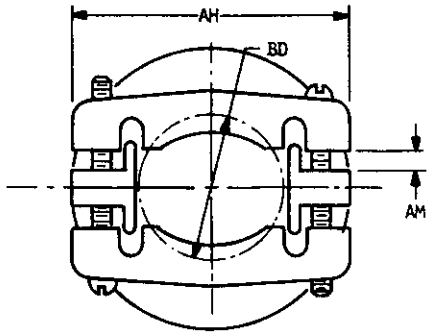

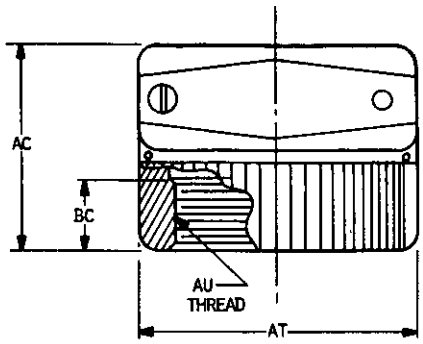


078-04-3



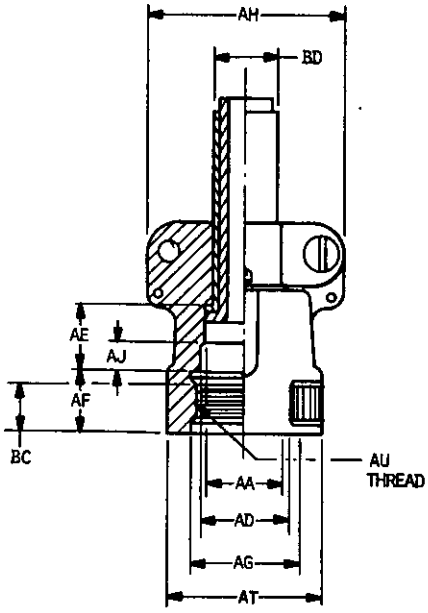



078-04-4

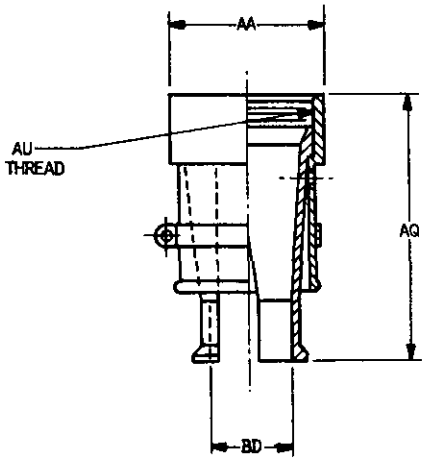


078-04-5


Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

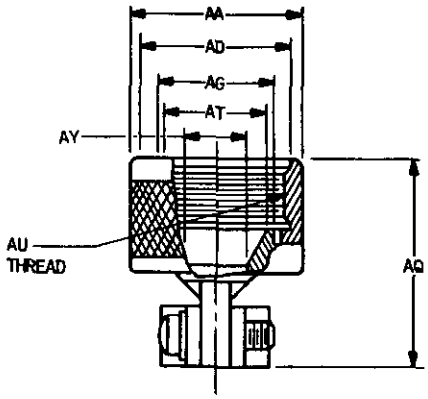





078-04-6

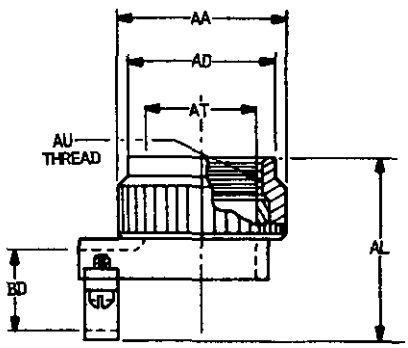




078-04-8

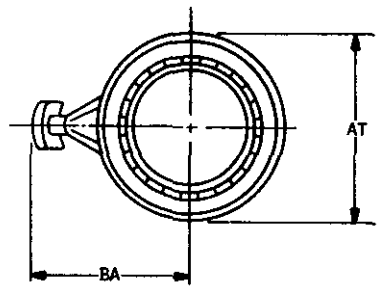

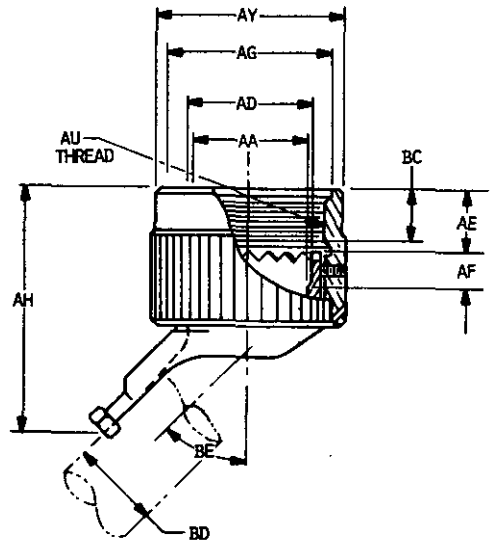


078-04-7

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

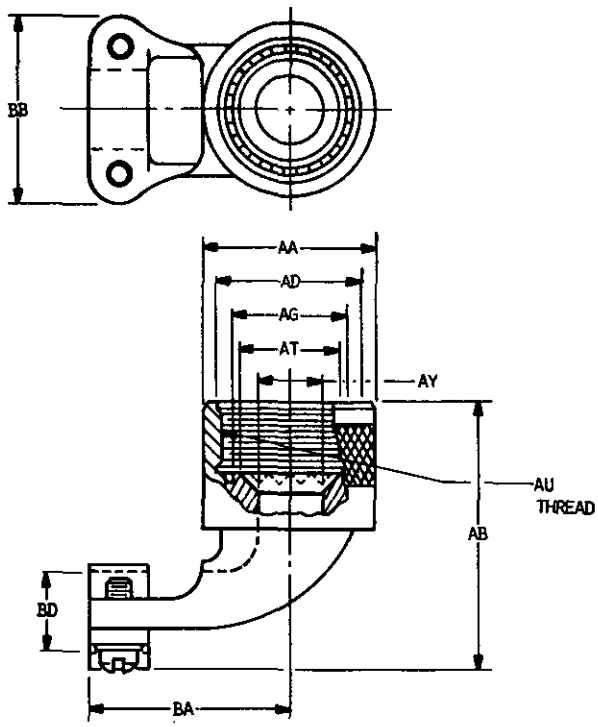


078-04-9

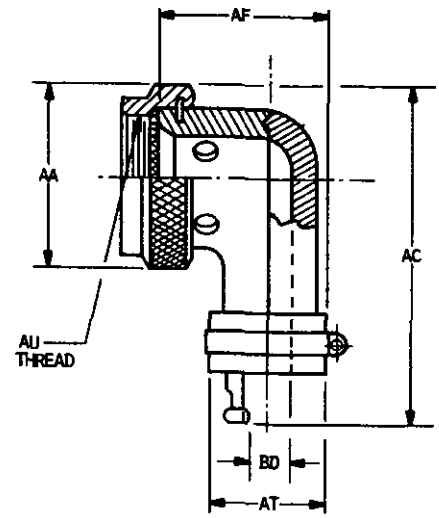


078-04-10

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

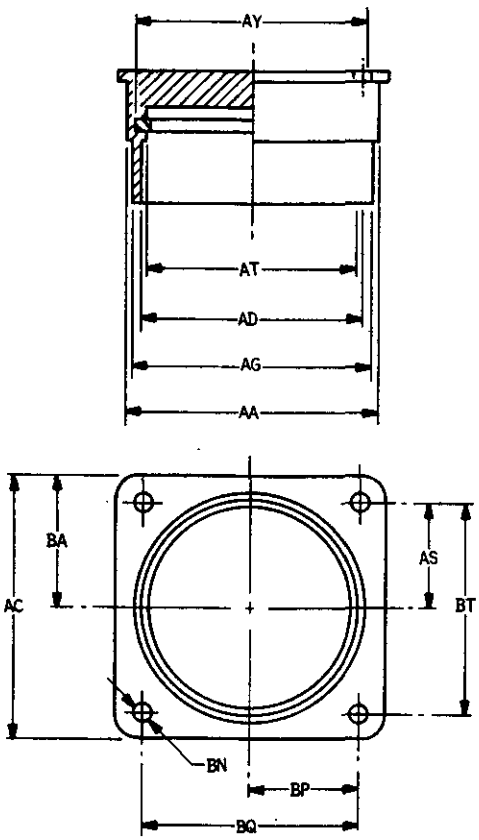



078-05-1

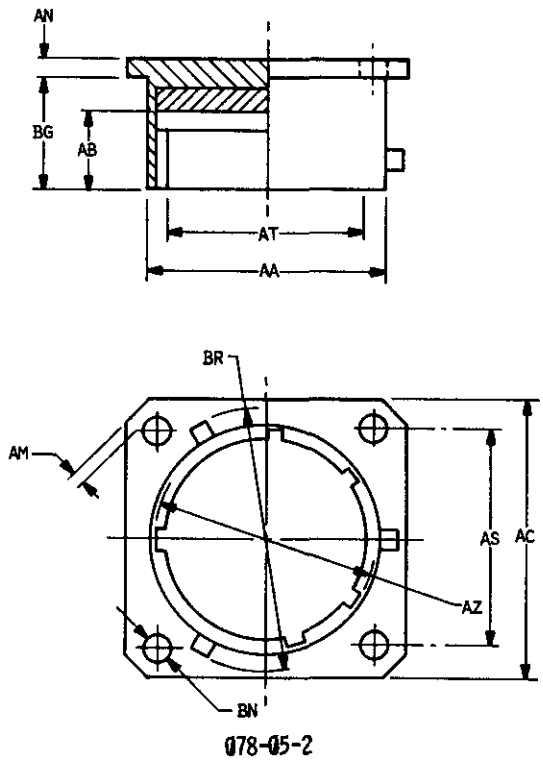


078-05-2


Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

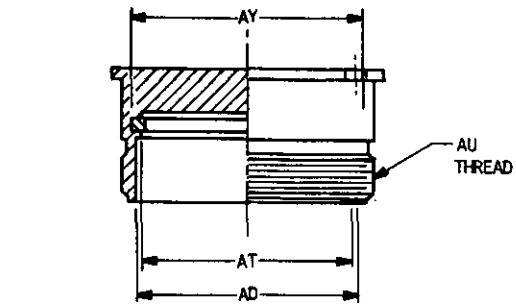

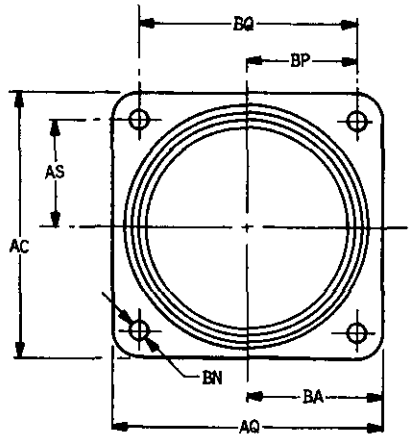


078-05-3

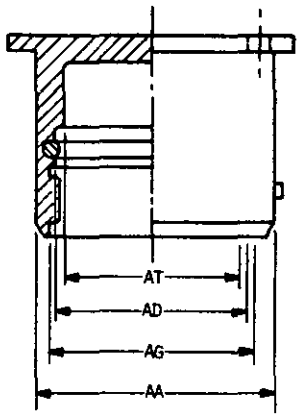


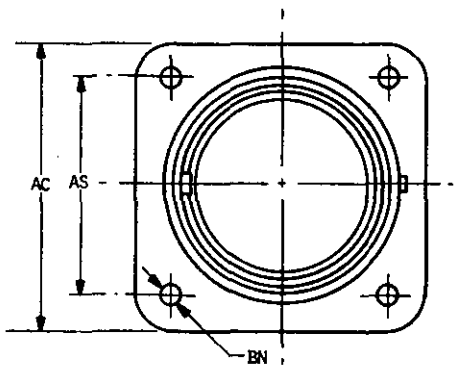


078-05-4


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

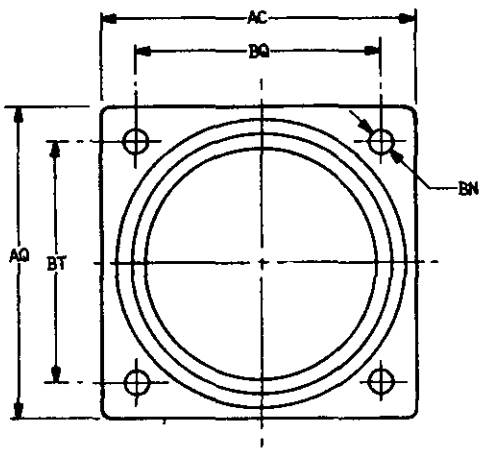

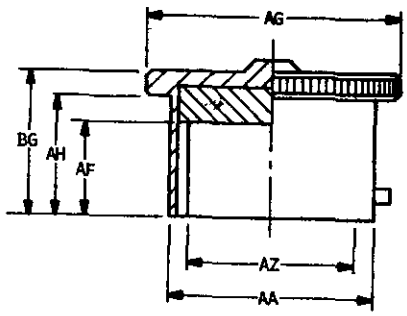

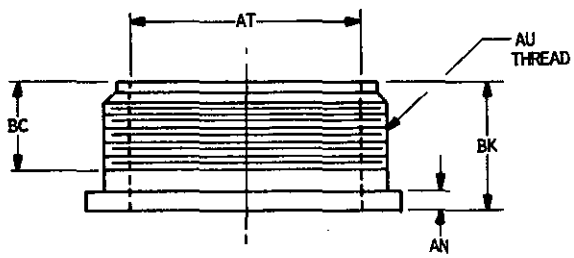


078-05-5

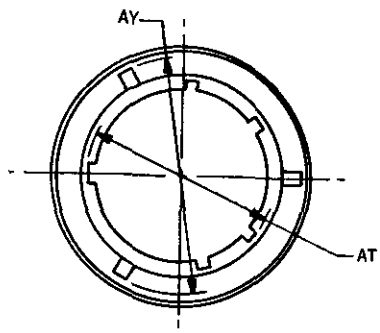



078-06-1


Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

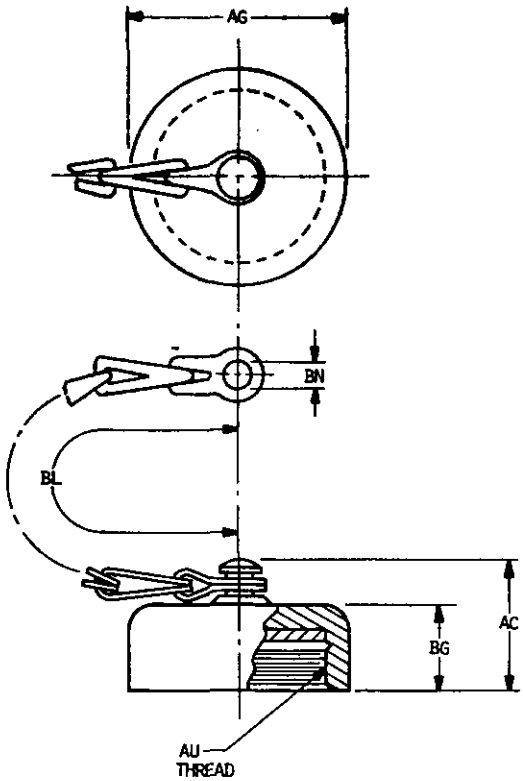


078-06-2

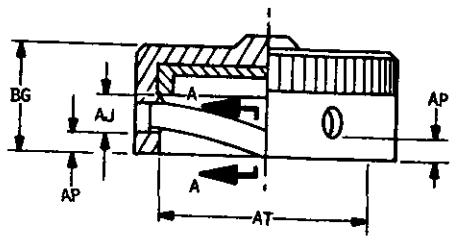

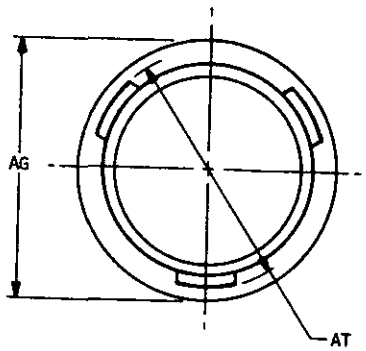




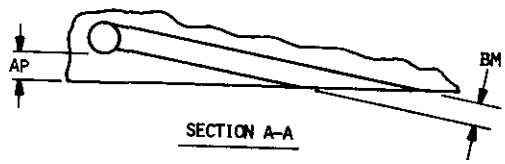


SECTION A-A

078-06-3




078-06-4

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

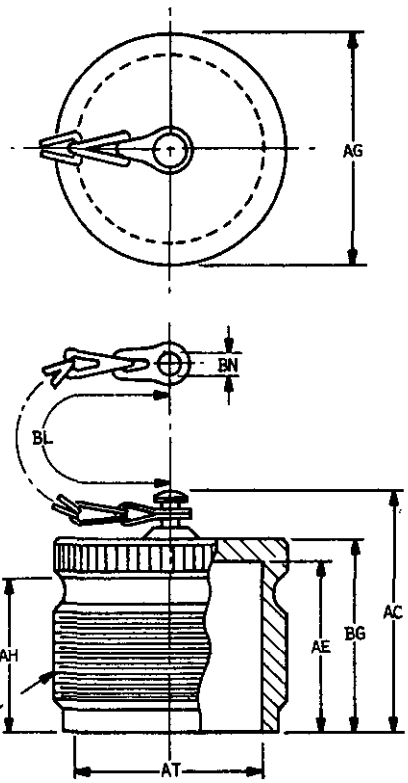



078-06-5

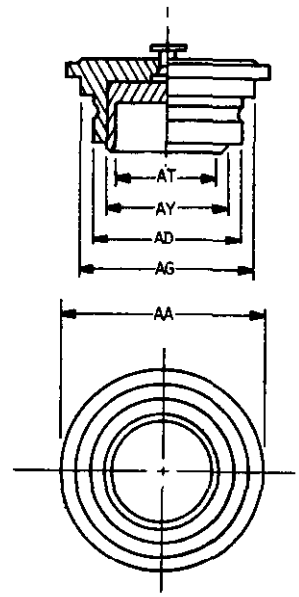


078-06-6


Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

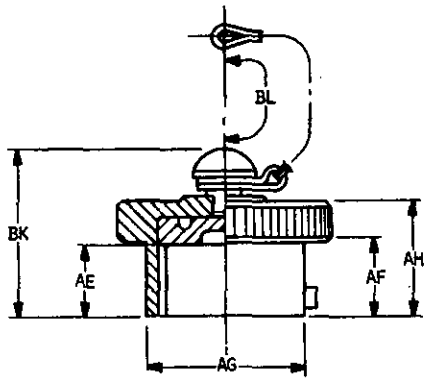




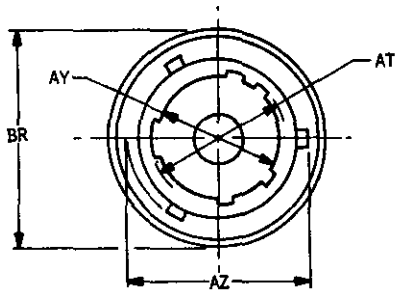

078-06-7




078-06-8

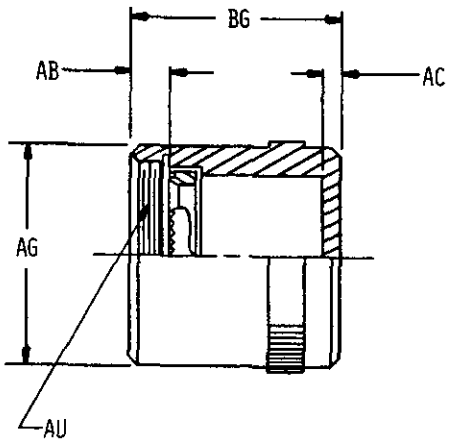


078-06-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

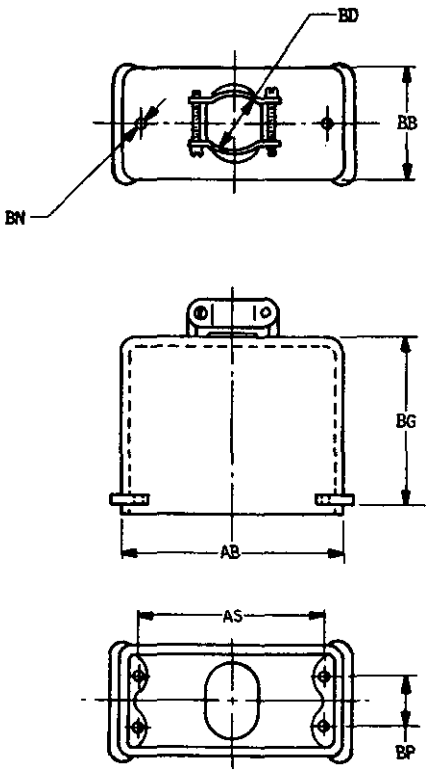


078-07-1

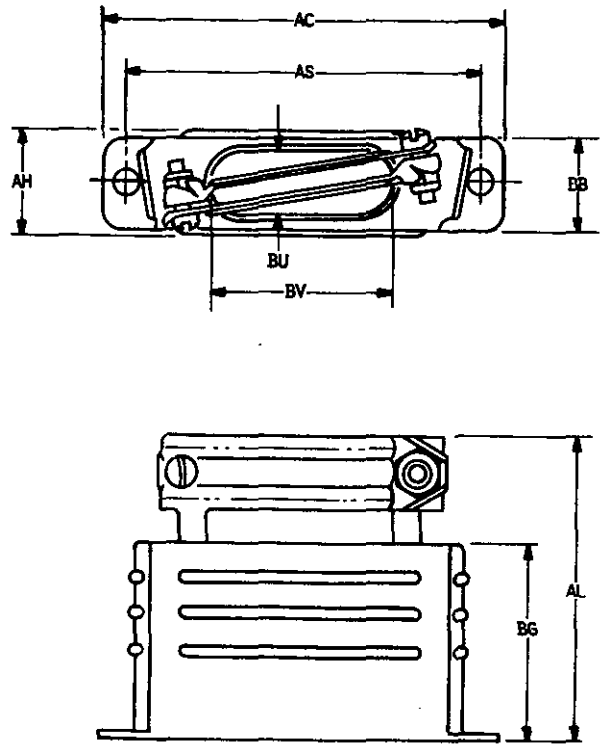


078-07-2


Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

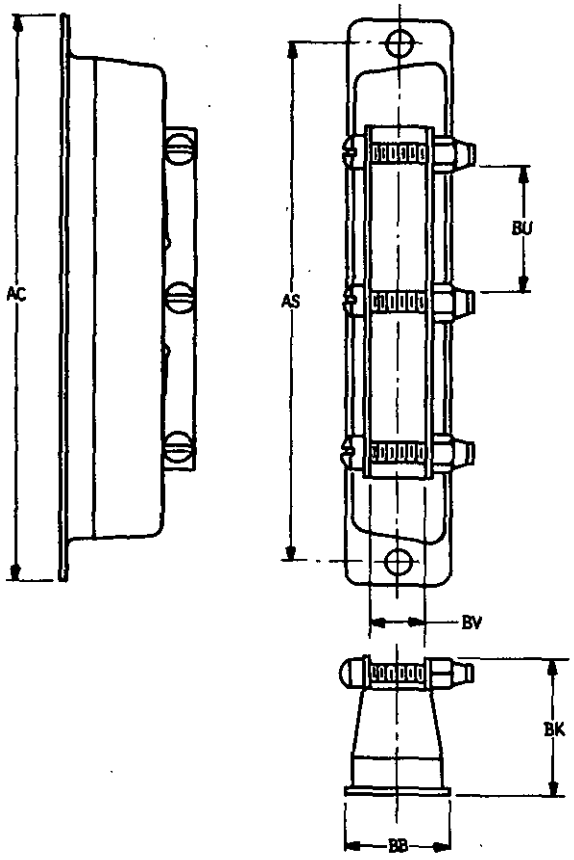

078-07-3

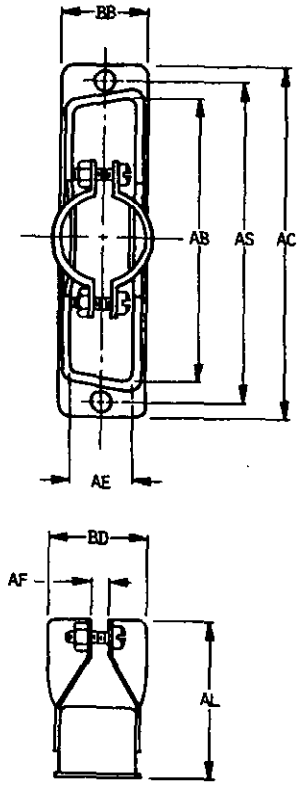


078-07-4

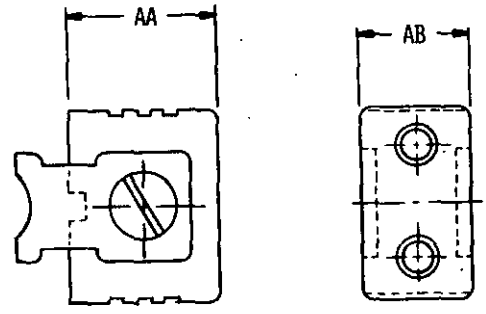


078-07-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

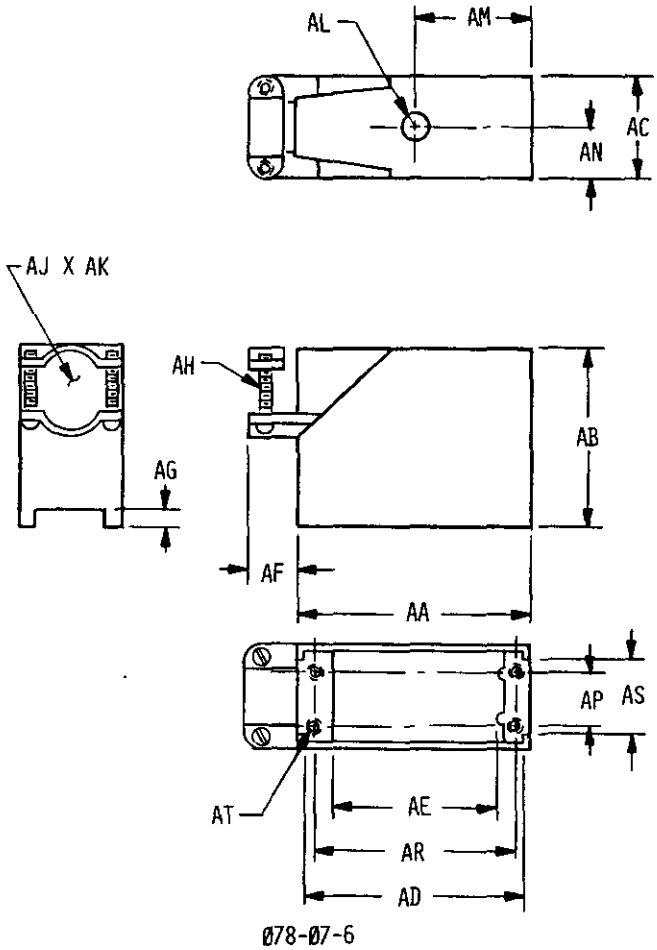


Ø78-Ø7-6


Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

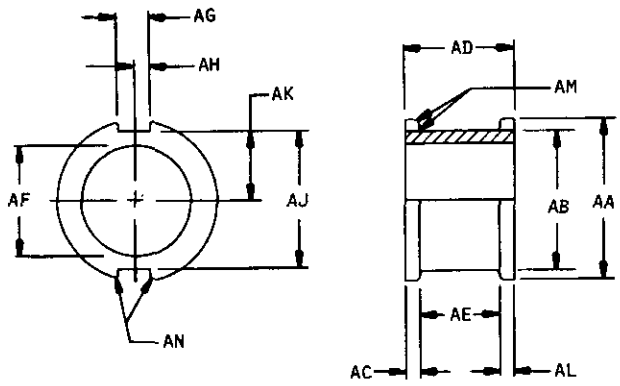

078-08-1

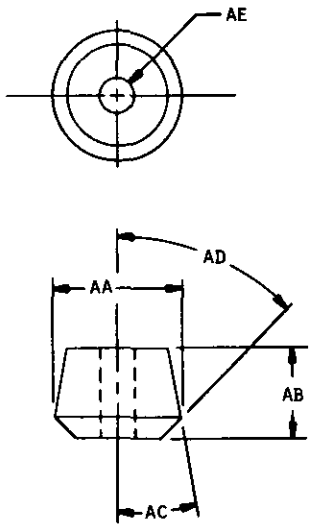


078-08-2

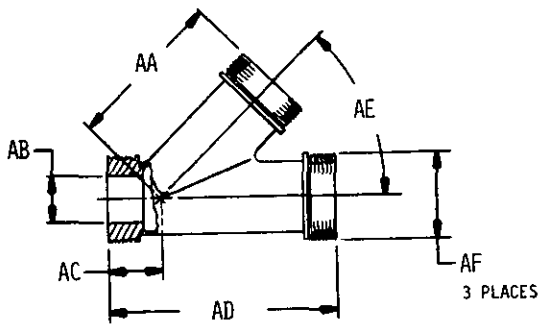


078-09-1


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

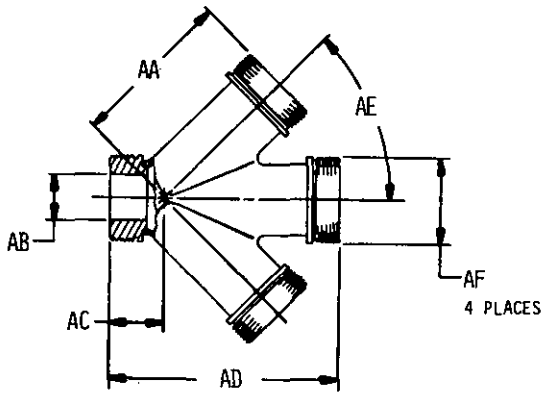

078-09-2

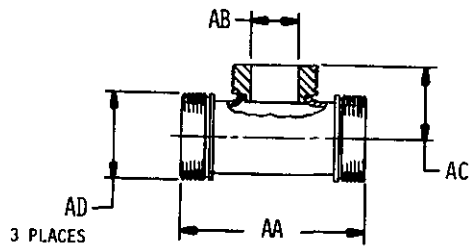


078-09-3

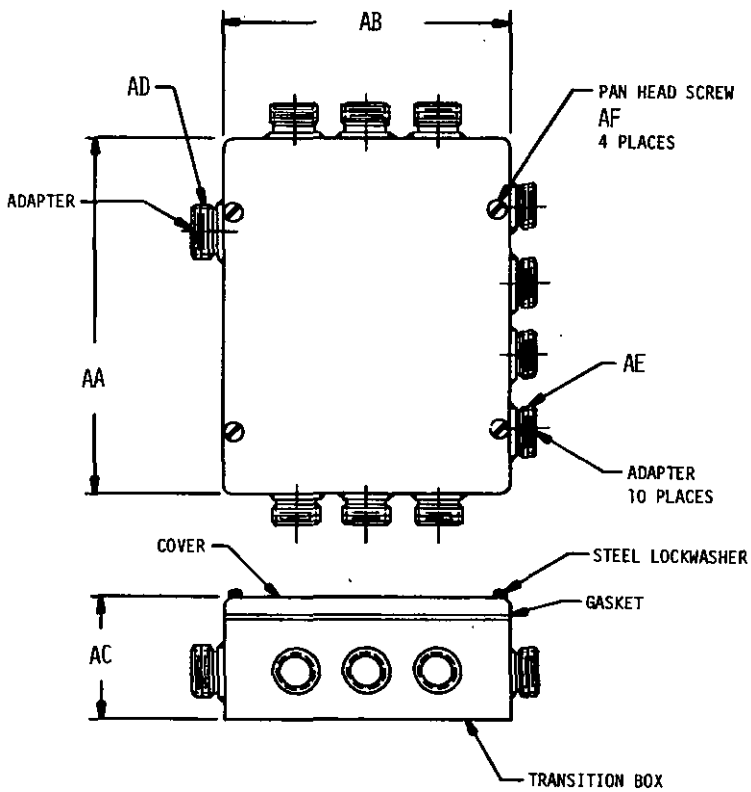

078-09-4

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

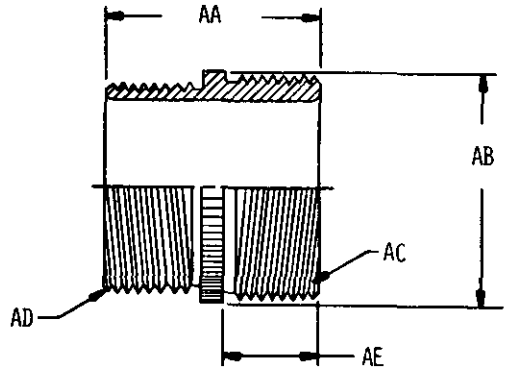

078-10-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	14	1573	24	1798	48	2438	36
0102	14	1574	24	1800	48	2440	36
0103	14	1575	24	1802	48	2442	36
0104	14	1582	24	1804	48	2444	36
0105	14	1590	48	1806	50	2446	36
0107	16	1601	52	1808	24	2448	36
0108	16	1621	52	1810	24	2450	36
0700	14	1624	52	1812	24	2452	38
0900	14	1641	66	1814	24	2536	40
1003	14	1642	68	1816	24	2550	42
1004	14	1643	68	1822	52	2552	42
1005	14	1645	68	2120	20	2554	44
1006	14	1651	66	2122	20	2556	44
1008	14	1652	66	2124	20	2557	44
1009	20	1661	28	2126	20	2560	44
1371	46	1681	26	2128	20	2590	46
1372	46	1683	26	2136	20	2592	46
1373	46	1684	26	2138	20	2594	46
1374	60	1691	58	2260	28	2596	46
1376	46	1692	60	2262	28	2606	48
1377	46	1693	60	2264	28	2608	48
1380	44	1694	60	2266	28	2610	48
1381	46	1701	58	2268	28	2644	68
1383	46	1702	58	2270	28	2694	58
1384	44	1703	58	2272	28	2696	58
1386	44	1711	32	2274	28	2698	50
1387	44	1713	32	2276	28	2700	58
1407	44	1714	32	2278	28	2702	50
1477	42	1715	32	2280	30	2772	50
1502	54	1716	32	2282	30	2776	52
1504	54	1717	32	2284	30	2777	52
1505	60	1721	30	2286	30	2780	52
1508	54	1722	30	2288	30	2782	52
1509	54	1775	56	2290	30	2784	52
1520	46	1782	26	2292	30	2848	54
1529	68	1789	24	2294	30	2850	54
1545	60	1790	24	2296	30	2852	54
1546	60	1792	24	2298	30	2854	54
1562	16	1794	20	2300	32	2858	56
1565	20	1796	48	2432	34	2860	56

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2866	56	2972	66	4870	38	6994	72
2870	56	2974	66	4874	36	6995	72
2872	56	2976	66	4875	38	7001	70
2874	56	2978	66	4878	50	7002	70
2876	56	2980	66	4884	34	7003	70
2878	56	2982	66	4885	34	7004	70
2880	56	2986	66	4891	34	7005	70
2882	56	2988	66	4894	34	7021	26
2884	58	3136	26	4897	40	7022	26
2886	58	4681	60	4900	34	7023	26
2888	58	4682	60	4902	36	7024	26
2890	58	4684	54	4904	18	7301	18
2916	60	4685	54	4905	18	7302	18
2918	60	4686	54	4906	32	7572	28
2928	62	4715	56	4908	32	7577	28
2922	62	4717	40	4942	68	7580	22
2924	62	4754	42	4943	68	7629	70
2926	62	4755	42	4944	68	7630	70
2928	62	4756	42	4958	22		
2930	62	4760	40	5000	38		
2932	62	4761	40	5060	18		
2934	62	4762	40	5061	18		
2936	62	4765	52	5062	18		
2938	62	4766	52	5063	18		
2940	62	4770	50	5209	68		
2942	62	4772	52	6267	40		
2944	62	4773	52	6280	34		
2946	62	4788	42	6308	34		
2948	64	4798	42	6310	36		
2950	64	4799	42	6359	44		
2952	64	4815	42	6369	14		
2954	64	4849	34	6372	70		
2956	64	4850	38	6870	70		
2958	64	4854	38	6873	14		
2960	64	4855	38	6874	16		
2962	64	4856	36	6941	18		
2964	64	4859	34	6942	18		
2966	64	4861	38	6991	72		
2968	64	4867	38	6992	72		
2970	64	4869	38	6993	72		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Accessory Reference Part Number	16
Additional Part Marking	72
Additional Requirements	70
Altitude Rating	18
Aperture Cards Required	16
Applicable Documents	72
Base Document	14
Cable Pull-Out	26
Cable Seal Flexing	28
Chain Tensile Strength	30
City, State, Zip	14
Classification	20
Company Name/Command	14
Configuration	20
Connector Identification	24
Contract Number/Office Symbol	14
Control, Source	14
Control, Specification	16
Date	14
Design and Construction	24
Dielectric Withstanding Voltage at Reduced Barometric Pressure	32
Dielectric Withstanding Voltage at Sea Level	36
Finishes	22
Format	14
Fungus	40
Government Design Activity FSCM	14
Humidity	42
Illustrations	22
Insulation Resistance	44
Magnetic Permeability	48
Materials	22
Metals	22
Mounting Hardware	70
Nomenclature	72
Notes	72

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Ozone Exposure	48
Packaging	72
Part Marking	70
Part Number	16
Part Number Cross-Reference	72
Phone Number	14
Quality Assurance Provisions	72
Ratings	20
Requester FSCM	14
Requester's Name	14
Revision of AEDPS Document (Number)	16
Salt Spray	50
Scope	16
Shell to Shell Conductivity	52
Shock, Specified Pulse	54
Source Table	16
Storage Conditions	68
Street/Building	14
Superseded Document	72
System Application	14
Tabulated Characteristics	22
Temperature Cycling	56
Temperature Life	58
Temperature Rating	18
Tubing Attachment	24
Units of Measure	18, 20
Vibration	60
Water Pressure	66
Weight	26
Workmanship	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-91A(MI), dated 20 Jan 1979 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-91A(MI), dated 20 Jan 1979 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander,
U.S. Army Missile R & D Command
ATTN: DRDMI-ESD
Redstone A rsenal, Alabama 35809

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.