DOD-STD-35-94A(MI)

26 SEPTEMBER 1986

SUPERSEDING
MIL-STD-94(MI)
7 SEPTEMBER 1976

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

OSCILLATORS

AREA EDS

NO DELIVERABLE DATA
REQUIRED BY THIS DOCUMENT

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL COMMAND
ALEXANDRIA, VA 22333

Oscillators
Automated Engineering
Document Preparation System

DOD-STD-35-94A(MI)

1. This Military Standard is approved for use by AMC, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Command, ATTN: AMSMI-RD-SE-TD-ST, Redstone Arsenal, Alabama 35898-5270, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-94A(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for Oscillators.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	3
	2.1	Government Documents	3
	2.1.1	Specifications and Standards	3
	2.2	Other Publications	4
	2.3	Order of Precedence	4
	3.	DEFINITIONS	5
	4.	GENERAL REQUIREMENTS	6
	4.1	Introduction	6
	4.2	Specification Requirement Sheet (SRS)	6
	4.3	Configuration	6
	4.3.1	Dimensions	6
	4.3.2	Illustrations	6
	4.4	Units of Measure	6
	5.	DETAILED REQUIREMENTS	7
	5.1	Introduction	7
	5.2	MSE Formats	7
	5.3	Referenced Documents	7
	5.4	Tabulation	7
	5.5	Keyword Code Index (KCI) and Standard Paragraphs	8
	5.5.1	Interrelationship of Codes	8
	5.5.2	Automatic MSE Data	8
	5.5.3	DOD-STD-35 Tables	9

TABLES

Table	I.	Title Index	2
	II.	Tabulation Candidates	7

APPENDICES

APPENDIX	A.	Illustrations	146
	B.	Characteristic Code Index	161
		Index	168

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for Oscillators.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate a MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts, have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects applicable to all AEDPS dash-numbered parts and included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specification (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for a MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSEs for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index and entered on a SRS, specifies that the title of the MSE will be the title shown in the Title Index.

Each MSE title, listed in the Title Index, is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference. When more than one document is listed for an MSE title, this information will be useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
OSCILLATOR, AUDIO FREQUENCY	087001	MIL-O-52374	HI VOLTAGE
		MIL-O-55310	CRYSTAL CONTROL
		MIL-O-85432	VOLTAGE CONTROL
OSCILLATOR, AUDIO-RADIO FREQUENCY	087002	MIL-O-55310	CRYSTAL CONTROL
OSCILLATOR, CRYSTAL	087003	MIL-O-55310	CRYSTAL CONTROL
OSCILLATOR, RADIO FREQUENCY	087004	MIL-O-55310	CRYSTAL CONTROL

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Government Documents.

2.1.1 Specifications and Standards. Unless otherwise specified, the following specifications and standards, of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-O-52374	Oscillator, High Voltage
MIL-O-55310	Oscillator, Crystal, General Specification for

STANDARD

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-461	Electromagnetic Emission and Susceptibility Requirements for the Control of Electromagnetic Interference
MIL-STD-462	Electromagnetic Interference Characteristics, Measurement of
MIL-STD-810	Environmental Test Methods and Engineering Guidelines
MIL-STD-1285	Electronic Parts Marking

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other Publications. The following documents form a part of this standard to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the issue of the DoDISS specified in the solicitation. The issues of documents which have not been adopted shall be those in effect on the date of the cited DoDISS.

ASTME380 Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, PA 19103.)

(Nongovernment standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of Precedence. In the event of conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Oscillators.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare a SRS for Oscillators, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Oscillators.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions, described in DOD-STD-35, are applicable to Oscillators.

4.3.2 Illustrations. Illustrations, applicable to Oscillators, are contained in Appendix A to this document.

4.4 Units of Measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE Formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced Documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table II provides codes for column headings which may be used for Oscillators characteristics. When different units of measure are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

TABLE II. TABULATION CANDIDATES

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1562	SUPPLY VOLTAGE VOLTS DC	1565	MAXIMUM CUR DRAIN MILLIA	1610	NOMINAL FREQUENCY HERTZ
1611	NOMINAL FREQUENCY KILOHERTZ	1612	NOMINAL FREQUENCY MEGAHERTZ	1614	CENTER FREQUENCY HERTZ
1615	CENTER FREQUENCY KILOHERTZ	1616	CENTER FREQUENCY MEGAHERTZ	1644	MINIMUM OUT POWER DBM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE II. TABULATION CANDIDATES (CONT)

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1645	MINIMUM OUT POWER MILLIWATT	1646	MINIMUM OUT POWER WATT	2470	TYPE
2471	OPERATION RQMT	2472	FREQUENCY		

5.5 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on a SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and it's associated code. Enter, on the SRS, the code and the characteristic value required. After the part's unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.5.1 Interrelationship of Codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The standard paragraph, of which the code is a part, is shown adjacent to the code on the right-hand page. When a characteristic value, entered with a code, becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact characteristic value entry, as supplied with the code, except for "X" entries.

5.5.2 Automatic MSE Data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without making additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

5.5.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in DOD-STD-35. Refer to DOD-STD-35 for general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*REQUESTER'S FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT.	0700
ONE SECTION DOCUMENT.	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6874	THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).
0107	
0108	0108. SCOPE.
	SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.
	PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.
	PART NUMBER. THE PART NUMBER FOR THE ITEMS IS (THE SAME AS THE NUMBER OF THIS DOCUMENT) PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.
6941	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.
6942	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION	
TYPE (DESIGNATION)	2470
CLASS (DESIGNATION)	1696
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
DIMENSION TABLE, (SEE TABLE III, DOD-STD-35)	
*UNITS (SELECT ONE)	
INCHES.	7572
MILLIMETERS.	7577
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950
NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.	
TABULATED CHARACTERISTICS (SEE TABLE VI, DOD-STD-35)	
MATERIALS (SEE TABLE VI DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VI IS USED.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CLASSIFICATION.
2470	TYPE 2470 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1696	CLASS 1696 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.
	MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FINISHES (SEE TABLE VII DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
METALS	
DISSIMILAR METALS.	7580
DESIGN AND CONSTRUCTION	
ALTITUDE	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	6790
SEA LEVEL TO (METERS)	6791
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	6792
SEA LEVEL TO (METERS)	6793
TEMPERATURE	
MAXIMUM OPERATING (DEGREES CELSIUS)	6794

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
	FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
7580	METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.
	DESIGN AND CONSTRUCTION.
6790	OPERATING ALTITUDE. THE OPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6790 FEET.
6791	OPERATING ALTITUDE. THE OPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6791 METERS.
6792	NONOPERATING ALTITUDE. THE NONOPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6792 FEET.
6793	NONOPERATING ALTITUDE. THE NONOPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6793 METERS.
6794	MAXIMUM OPERATING TEMPERATURE. THE OPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6794 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM NONOPERATING (DEGREES CELSIUS)	6795
MAXIMUM STORAGE (DEGREES CELSIUS)	6796
MAXIMUM AMBIENT OPERATING (DEGREES CELSIUS)	6798
MINIMUM OPERATING (DEGREES CELSIUS)	6799
MINIMUM STORAGE (DEGREES CELSIUS)	6801
MINIMUM AMBIENT OPERATING (DEGREES CELSIUS)	6803
NOMINAL STORAGE (DEGREES CELSIUS)	6804
NOMINAL OPERATING (DEGREES CELSIUS)	6805
DESIGN RELIABILITY	
FAILURE RATE (PERCENT PER 1000 HOURS)	7025
CONFIDENCE LEVEL (PERCENT)	7026
RATING TEMPERATURE (DEGREES CELSIUS)	7029

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6795	MAXIMUM NONOPERATING TEMPERATURE. THE NONOPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6795 DEGREES CELSIUS.
6796	MAXIMUM STORAGE TEMPERATURE. THE STORAGE TEMPERATURE SHALL BE NOT GREATER THAN 6796 DEGREES CELSIUS.
6798	MAXIMUM AMBIENT OPERATING TEMPERATURE. THE AMBIENT OPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6798 DEGREES CELSIUS.
6799	MINIMUM OPERATING TEMPERATURE. THE OPERATING TEMPERATURE SHALL BE NOT LESS THAN 6799 DEGREES CELSIUS.
6801	MINIMUM STORAGE TEMPERATURE. THE STORAGE TEMPERATURE SHALL BE NOT LESS THAN 6801 DEGREES CELSIUS.
6803	MINIMUM AMBIENT OPERATING TEMPERATURE. THE AMBIENT OPERATING TEMPERATURE SHALL BE NOT LESS THAN 6803 DEGREES CELSIUS.
6804	NOMINAL STORAGE TEMPERATURE. THE STORAGE TEMPERATURE SHALL BE 6804 DEGREES CELSIUS.
6805	NOMINAL OPERATING TEMPERATURE. THE OPERATING TEMPERATURE SHALL BE 6805 DEGREES CELSIUS.
	DESIGN RELIABILITY. THE ITEM(S) SHALL BE DESIGNED, USING MATERIALS AND MANUFACTURING PROCESSES CAPABLE OF MEETING THE FOLLOWING CONDITIONS:
7025	THE FAILURE RATE SHALL BE LESS THAN 7025 PERCENT PER 1000 HOURS.
7026	THE CONFIDENCE LEVEL SHALL BE 7026 PERCENT.
7029	THE DESIGN RELIABILITY SHALL BE AT A TEMPERATURE OF 7029 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELECTRICAL STRESS (SELECT ONE)	
VOLTAGE (PERCENT OF RATED)	7030
LOAD (PERCENT OF RATED)	7027
POWER (PERCENT OF RATED)	7028
INPUT POWER	
OSCILLATOR PEAK INPUT POWER (SELECT ONE)	
(MILLIWATTS)	1595
(WATTS)	1596
OVEN PEAK INPUT POWER (SELECT ONE)	
(MILLIWATTS)	1597
(WATTS)	1598
MAXIMUM STEADY OSCILLATOR INPUT POWER (SELECT ONE)	
(MILLIWATTS)	1599
(WATTS)	1600
NOMINAL OVEN INPUT POWER (SELECT ONE)	
(MILLIWATTS)	1601
(WATTS)	1602

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7030	THE DESIGN RELIABILITY APPLIED VOLTAGE SHALL BE AT 7030 PERCENT OF THE RATED VOLTAGE.
7027	THE DESIGN RELIABILITY APPLIED LOAD SHALL BE AT 7027 PERCENT OF THE RATED LOAD.
7028	THE DESIGN RELIABILITY APPLIED POWER SHALL BE AT 7028 PERCENT OF THE RATED POWER.
	INPUT POWER.
1595	THE PEAK OSCILLATOR INPUT POWER SHALL BE 1595 MILLIWATT(S).
1596	THE PEAK OSCILLATOR INPUT POWER SHALL BE 1596 WATT(S).
1597	THE PEAK OVEN INPUT POWER SHALL BE 1597 MILLIWATT(S).
1598	THE PEAK OVEN INPUT POWER SHALL BE 1598 WATT(S).
1599	THE STEADY OSCILLATOR INPUT POWER SHALL BE NOT GREATER THAN 1599 MILLIWATT(S).
1600	THE STEADY OSCILLATOR INPUT POWER SHALL BE NOT GREATER THAN 1600 WATT(S).
1601	THE NOMINAL OVEN INPUT POWER SHALL BE 1601 MILLIWATT(S).
1602	THE NOMINAL OVEN INPUT POWER SHALL BE 1602 WATT(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NOMINAL OVEN INPUT POWER TOLERANCE (PERCENT)	1603
OSCILLATOR LOAD	
RESISTANCE (SELECT ONE)	
(OHMS)	1604
(KILOHMS)	1605
RESISTANCE TOLERANCE ±(PERCENT)	1606
CAPACITANCE SHUNT (PICOFARADS)	1607
SHUNT TOLERANCE ±(PERCENT)	1608
IMPEDANCE (OHMS)	1609
OUTPUT FREQUENCY	
NOMINAL FREQUENCY (SELECT ONE)	
(HERTZ)	1610
(KILOHERTZ)	1611
(MEGAHERTZ)	1612
FREQUENCY TOLERANCE ±(PERCENT)	1613
CENTER FREQUENCY (SELECT ONE)	
(HERTZ)	1614
(KILOHERTZ)	1615
(MEGAHERTZ)	1616

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1603	THE NOMINAL OVEN INPUT POWER TOLERANCE SHALL BE PLUS OR MINUS 1603 PERCENT.
	OSCILLATOR LOAD.
1604	THE OSCILLATOR LOAD RESISTANCE SHALL BE 1604 OHM(S).
1605	THE OSCILLATOR LOAD RESISTANCE SHALL BE 1605 KILOHM(S).
1606	THE OSCILLATOR LOAD RESISTIVE TOLERANCE SHALL BE PLUS OR MINUS 1606 PERCENT.
1607	THE OSCILLATOR LOAD CAPACITANCE SHUNT SHALL BE 1607 PICOFARAD(S).
1608	THE OSCILLATOR LOAD CAPACITANCE SHUNT TOLERANCE SHALL BE PLUS OR MINUS 1608 PERCENT.
1609	THE LOAD IMPEDANCE SHALL BE 1609 OHM(S).
	OUTPUT FREQUENCY.
1610	THE NOMINAL OUTPUT FREQUENCY SHALL BE 1610 HERTZ.
1611	THE NOMINAL OUTPUT FREQUENCY SHALL BE 1611 KILOHERTZ.
1612	THE NOMINAL OUTPUT FREQUENCY SHALL BE 1612 MEGAHERTZ.
1613	THE NOMINAL OUTPUT FREQUENCY TOLERANCE SHALL BE PLUS OR MINUS 1613 PERCENT.
1614	THE CENTER OUTPUT FREQUENCY SHALL BE 1614 HERTZ.
1615	THE CENTER OUTPUT FREQUENCY SHALL BE 1615 KILOHERTZ.
1616	THE CENTER OUTPUT FREQUENCY SHALL BE 1616 MEGAHERTZ.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CENTER FREQUENCY TUNING RANGE ±(PERCENT)	1617
MODULATION VOLTAGE (VOLTS DC)	1618
FREQUENCY ____	2472
DEVIATION CHARACTERISTICS	
FREQUENCY (SELECT ONE)	
(HERTZ)	1620
FROM (PPM)	1621
*TO (PPM)	1622
MODULATION VOLTAGE CHANGE	
FROM (VOLTS DC)	1623
*TO (VOLTS DC)	1624
RMS FRACTIONAL FREQUENCY DEVIATION	
MAXIMUM (PPM)	1625
*DURATION (MINUTES)	1626
DEVIATION SENSITIVITY	
MINIMUM (PPM/VOLT CHANGE OF MODULATION)	1627
DEVIATION LINEARITY ±(PERCENT)	1628
DEVIATION FREQUENCY RESPONSE	
(DECIBELS)	1629
*REFERENCE FREQUENCY (KILOHERTZ)	1630

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1617	THE OSCILLATOR TUNING RANGE SHALL BE PLUS OR MINUS 1617 PERCENT OF THE CENTER FREQUENCY.
1618	THE MODULATION VOLTAGE APPLIED TO THE OSCILLATOR SHALL BE 1618 VOLT(S) DC.
2472	THE FREQUENCY SHALL BE 2472.
	DEVIATION CHARACTERISTICS.
1620	THE FREQUENCY DEVIATION SHALL BE NOT LESS THAN 1620 HERTZ.
1621 1622	THE FREQUENCY DEVIATION RANGE SHALL BE FROM 1621 PPM TO 1622 PPM.
1623 1624	THE MODULATION VOLTAGE CHANGE SHALL BE FROM 1623 VOLT(S) DC TO 1624 VOLT(S) DC.
1625 1626	THE RMS FRACTIONAL FREQUENCY DEVIATION SHALL BE NOT GREATER THAN 1625 PPM OVER A TIME PERIOD OF 1626 MINUTE(S).
1627	THE DEVIATION SENSITIVITY SHALL BE NOT LESS THAN 1627 PPM PER VOLT CHANGE IN THE DC MODULATION INPUT VOLTAGE.
1628	THE BEST STRAIGHT LINE LINEARITY OF THE OSCILLATOR SHALL BE PLUS OR MINUS 1628 PERCENT VARIATION FROM THE LINE.
1629 1630	THE DEVIATION FREQUENCY RESPONSE SHALL BE PLUS OR MINUS 1629 DECIBEL(S) AT A REFERENCE FREQUENCY OF 1630 KILOHERTZ.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SPURIOUS OUTPUTS	
DISTORTION MAXIMUM (PERCENT)	1631
DISTORTION MINIMUM (DECIBELS)	1704
NONHARMONIC RESPONSE MINIMUM (DECIBELS)	1632
OUTPUT VOLTAGES	
MINIMUM (VOLTS PEAK TO PEAK)	1633
MAXIMUM (VOLTS PEAK TO PEAK)	1634
MINIMUM EFFECTIVE (VOLTS RMS)	1635
MAXIMUM EFFECTIVE (VOLTS RMS)	1636
LOGIC 0 MAXIMUM (VOLTS DC)	1639
MAXIMUM SINK CURRENT (MILLIAMPERES)	1640
LOGIC 1 MINIMUM (VOLTS DC)	1641
MAXIMUM SOURCE CURRENT (MILLIAMPERES)	1642

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	SPURIOUS OUTPUTS.
1631	THE HARMONIC DISTORTION SHALL BE NOT GREATER THAN 1631 PERCENT OF THE FUNDAMENTAL OUTPUT FREQUENCY.
1704	THE HARMONIC AND SUBHARMONIC DISTORTION SHALL BE NOT LESS THAN 1704 DECIBEL(S) BELOW FULL OUTPUT POWER.
1632	THE NONHARMONIC SPURIOUS RESPONSE SHALL BE NOT LESS THAN 1632 DECIBEL(S) BELOW THE DESIRED OUTPUT SIGNAL.
	OUTPUT VOLTAGES.
1633	THE OUTPUT VOLTAGE SHALL BE NOT LESS THAN 1633 VOLT(S) PEAK TO PEAK.
1634	THE OUTPUT VOLTAGE SHALL BE NOT GREATER THAN 1634 VOLT(S) PEAK TO PEAK.
1635	THE OUTPUT EFFECTIVE VOLTAGE SHALL BE NOT LESS THAN 1635 VOLT(S) RMS.
1636	THE OUTPUT EFFECTIVE VOLTAGE SHALL BE NOT GREATER THAN 1636 VOLT(S) RMS.
1639	THE LOGIC ZERO VOLTAGE SHALL BE NOT GREATER THAN 1639 VOLT(S) DC.
1640	THE SINK CURRENT SHALL BE NOT GREATER THAN 1640 MILLIAMPERE(S).
1641	THE LOGIC ONE VOLTAGE SHALL BE NOT LESS THAN 1641 VOLT(S) DC.
1642	THE SOURCE CURRENT SHALL BE NOT GREATER THAN 1642 MILLIAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HIGH VOLTAGE OSCILLATOR TABLE	
OUTPUT POWER	
MINIMUM (SELECT ONE)	
(DECIBELS)	1643
(DECIBELS REFERENCED TO ONE MILLIWATT)	1644
(MILLIWATTS)	1645
(WATTS)	1646
REFERENCE LOAD (OHMS)	1647
REFERENCE TEMPERATURE (DEGREES CELSIUS)	1648
REFERENCE TEMPERATURE RANGE	
FROM (DEGREES CELSIUS)	1649
*TO (DEGREES CELSIUS)	1650

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

THE OUTPUT VOLTAGE OF A HIGH VOLTAGE OSCILLATOR SHALL BE MEASURED ACCORDING TO THE FOLLOWING TABLE:

VOLTAGE OUTPUT TABLE

INPUT VOLTAGE (VDC)	SOURCE IMPD (OHM)	DC OUTPUT LOAD	TOTAL CAPACITANCE OF OUTPUT LOAD (PF)	VAC(P TO P) OUTPUT VOLTAGE		
					TOL	
				VAL	(+V)	(-V)
2050	2051	2052	2053	2054	2055	2056
2057	2058	2059	2060	2061	2062	2063
2064	2065	2066	2067	2068	2069	2070
2071	2072	2073	2074	2075	2076	2077
2078	2079	2080	2081	2082	2083	2084

OUTPUT POWER.

1643 THE OUTPUT POWER SHALL BE NOT LESS THAN 1643 DECIBEL(S).

1644 THE OUTPUT POWER SHALL BE NOT LESS THAN 1644 DECIBEL(S)M.

1645 THE OUTPUT POWER SHALL BE NOT LESS THAN 1645 MILLIWATT(S).

1646 THE OUTPUT POWER SHALL BE NOT LESS THAN 1646 WATT(S).

1647 THE OSCILLATOR SHALL OPERATE INTO A LOAD OF 1647 OHM(S).

1648 THE AMBIENT TEMPERATURE AS REFERENCED TO THE MINIMUM POWER OUTPUT SHALL BE 1648 DEGREES CELSIUS.

1649 THE REFERENCE TEMPERATURE RANGE SHALL BE FROM 1649
1650 DEGREES TO 1650 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OUTPUT SIGNAL RANGE	
FROM (DECIBELS)	1651
*TO (DECIBELS)	1652
OUTPUT SIGNAL RANGE	
FROM (DECIBELS REFERENCED TO ONE MILLIWATT)	1653
*TO (DECIBELS REFERENCED TO ONE MILLIWATT)	1654
OUTPUT CURRENT	
MAXIMUM (MILLIAMPERE PEAK TO PEAK)	1655
INPUT (VOLTS DC)	1656
CAPACITIVE LOAD (PICOFARADS)	1658
MAXIMUM CURRENT SURGE (MICROAMPERE)	1659
INPUT VOLTAGES	
POWER SUPPLY VOLTAGE(S)	
+(VOLTS DC)	1562
TOLERANCE (SELECT ONE)	
±(PERCENT)	1563
±(VOLTS DC)	1564

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1651 1652	THE OUTPUT SIGNAL RANGE SHALL BE FROM 1651 DECIBEL(S) TO 1652 DECIBEL(S).
1653 1654	THE OUTPUT SIGNAL RANGE SHALL BE FROM 1653 DECIBEL(S)M TO 1654 DECIBEL(S)M.
	OUTPUT CURRENT.
1655	THE OSCILLATOR STEADY STATE OUTPUT CURRENT SHALL BE NOT GREATER THAN 1655 MILLIAMPERE(S) PEAK TO PEAK.
1656	THE INPUT VOLTAGE SHALL BE 1656 VOLT(S) DC.
1658	THE CAPACITIVE LOAD SHALL BE 1658 PICOFARAD(S).
1659	THE CURRENT SURGES DUE TO CAPACITOR CHARGING AND DIODE RECOVERY SHALL BE NOT GREATER THAN 1659 MICROAMPERE(S).
	INPUT VOLTAGES.
1562	THE OSCILLATOR POWER VOLTAGE SHALL BE PLUS 1562 VOLT(S) DC.
1563	THE OSCILLATOR POWER VOLTAGE TOLERANCE SHALL BE PLUS OR MINUS 1563 PERCENT.
1564	THE OSCILLATOR POWER VOLTAGE TOLERANCE SHALL BE PLUS OR MINUS 1564 VOLT(S) DC.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CURRENT DRAIN (SELECT ONE)	
MAXIMUM (MILLIAMPERES)	1565
NOMINAL (MILLIAMPERES)	1566
-(VOLTS DC)	1567
TOLERANCE (SELECT ONE)	
±(PERCENT)	1568
±(VOLTS DC)	1569
CURRENT DRAIN (SELECT ONE)	
MAXIMUM (MILLIAMPERES)	1570
NOMINAL (MILLIAMPERES)	1571
VOLTAGE RANGE	
FROM (VOLTS DC)	1572
*TO (VOLTS DC)	1573
CONTROL VOLTAGE(S)	
+(VOLTS DC)	1574
TOLERANCE (SELECT ONE)	
±(PERCENT)	1575
±(VOLTS DC)	1576
-(VOLTS DC)	1577

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1565	THE CURRENT DRAIN SHALL BE NOT GREATER THAN 1565 MILLIAMPERE(S).
1566	THE NOMINAL CURRENT DRAIN SHALL BE 1566 MILLIAMPERE(S).
1567	THE OSCILLATOR POWER VOLTAGE SHALL BE MINUS 1567 VOLT(S) DC.
1568	THE OSCILLATOR POWER VOLTAGE TOLERANCE SHALL BE PLUS OR MINUS 1568 PERCENT.
1569	THE OSCILLATOR POWER VOLTAGE TOLERANCE SHALL BE PLUS OR MINUS 1569 VOLT(S) DC.
1570	THE CURRENT DRAIN SHALL BE NOT GREATER THAN 1570 MILLIAMPERE(S).
1571	THE NOMINAL CURRENT DRAIN SHALL BE 1571 MILLIAMPERE(S).
1572 1573	THE OSCILLATOR POWER VOLTAGE RANGE SHALL BE FROM 1572 VOLT(S) DC TO 1573 VOLT(S) DC.
1574	THE OSCILLATOR CONTROL VOLTAGE SHALL BE PLUS 1574 VOLT(S) DC.
1575	THE OSCILLATOR CONTROL VOLTAGE TOLERANCE SHALL BE PLUS OR MINUS 1575 PERCENT.
1576	THE OSCILLATOR CONTROL VOLTAGE TOLERANCE SHALL BE PLUS OR MINUS 1576 VOLT(S) DC.
1577	THE OSCILLATOR CONTROL VOLTAGE SHALL BE MINUS 1577 VOLT(S) DC.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TOLERANCE (SELECT ONE)	
±(PERCENT)	1578
±(VOLTS DC)	1579
VOLTAGE RANGE	
FROM (VOLTS DC)	1580
*TO (VOLTS DC)	1581
SECOND VOLTAGE RANGE	
FROM (VOLTS PEAK TO PEAK)	1582
*TO (VOLTS PEAK TO PEAK)	1583
MODULATION VOLTAGE RANGE	
FROM (VOLTS DC)	1584
*TO (VOLTS DC)	1585
OVEN VOLTAGE (SELECT ONE)	
+(VOLTS DC)	1586
TOLERANCE ±(PERCENT)	1587
CURRENT DRAIN (SELECT ONE)	
MAXIMUM (MILLIAMPERES)	1588
NOMINAL (MILLIAMPERES)	1589
(VOLTS AC)	1590
TOLERANCE (PERCENT)	1591

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1578	THE OSCILLATOR CONTROL VOLTAGE TOLERANCE SHALL BE PLUS OR MINUS 1578 PERCENT.
1579	THE OSCILLATOR CONTROL VOLTAGE TOLERANCE SHALL BE PLUS OR MINUS 1579 VOLT(S) DC.
1580 1581	THE OSCILLATOR CONTROL VOLTAGE RANGE SHALL BE FROM 1580 VOLT(S) DC TO 1581 VOLT(S) DC.
1582 1583	THE SECOND OSCILLATOR CONTROL VOLTAGE RANGE SHALL BE FROM 1582 VOLT(S) PEAK TO PEAK TO 1583 VOLT(S) PEAK TO PEAK.
1584 1585	THE MODULATION VOLTAGE RANGE SHALL BE FROM 1584 VOLT(S) DC TO 1585 VOLT(S) DC.
1586	THE OVEN POWER VOLTAGE SHALL BE PLUS 1586 VOLT(S) DC.
1587	THE OVEN POWER VOLTAGE TOLERANCE SHALL BE PLUS OR MINUS 1587 PERCENT.
1588	THE CURRENT DRAIN SHALL BE NOT GREATER THAN 1588 MILLIAMPERE(S).
1589	THE NOMINAL CURRENT DRAIN SHALL BE 1589 MILLIAMPERE(S).
1590	THE OVEN POWER VOLTAGE SHALL BE 1590 VOLT(S) AC.
1591	THE OVEN POWER VOLTAGE TOLERANCE SHALL BE PLUS OR MINUS 1591 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CURRENT DRAIN (SELECT ONE)	
MAXIMUM (MILLIAMPERES)	1592
NOMINAL (MILLIAMPERES)	1593
IMPEDANCE	
MINIMUM (MEGOHMS)	1594
OUTPUT WAVEFORM	
TYPE (SELECT ONE)	
SINUSOIDAL.	1660
SQUARE.	1661
SYMMETRY/DUTY CYCLE (SELECT ONE)	
NOMINAL (PERCENT)	1662
TOLERANCE (PERCENT)	1663
LIMITS	
FROM (PERCENT)	1664
*TO (PERCENT)	1665
SQUARE WAVE COMPATIBLE WITH ____	2100
HALF-CYCLE MIDPOINT VOLTAGE (VOLTS)	1675
MAXIMUM DECAY (PERCENT)	1678

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1592	THE CURRENT DRAIN SHALL BE NOT GREATER THAN 1592 MILLIAMPERE(S).
1593	THE NOMINAL CURRENT DRAIN SHALL BE 1593 MILLIAMPERE(S).
1594	IMPEDANCE. THE INPUT IMPEDANCE SHALL BE NOT LESS THAN 1594 MEGOHM(S).
1660	OUTPUT WAVEFORM. THE OUTPUT WAVEFORM SHALL BE SINUSOIDAL.
1661	OUTPUT WAVEFORM. THE OUTPUT WAVEFORM SHALL BE SQUARE WAVE.
1662	THE NOMINAL SYMMETRY OR DUTY CYCLE SHALL BE 1662 PERCENT.
1663	THE SYMMETRY OR DUTY CYCLE TOLERANCE SHALL BE PLUS OR MINUS 1663 PERCENT.
1664 1665	THE DUTY CYCLE LIMITS SHALL BE BETWEEN 1664 PERCENT AND 1665 PERCENT.
2100	THE SYMMETRICAL SQUARE WAVE OUTPUT SHALL BE COMPATIBLE WITH 2100.
1675	EACH HALF-CYCLE MIDPOINT VOLTAGE SHALL BE 1675 VOLT(S).
1678	THE DECAY VOLTAGE OR DIFFERENCE FROM THE MIDPOINT VOLTAGE SHALL BE NOT GREATER THAN 1678 PERCENT WHEN MEASURED EQUIDISTANT ON EACH SIDE OF THE MIDPOINT.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM OVERSHOOT	
RESISTIVE LOAD (VOLTS)	1679
IMPEDANCE LOAD (VOLTS)	1680
MINIMUM TROUGH VOLTAGE PEAK (VOLTS)	1681
OUTPUT PULSE DURATION (SELECT ONE)	
(NANOSECONDS)	1682
(MICROSECONDS)	1683
(MILLISECONDS)	1684
MAXIMUM RISE AND FALL TIME (SELECT ONE)	
(NANOSECONDS)	1685
(MICROSECONDS)	1686
(MILLISECONDS)	1687
PULSE REPETITION RATE (PULSES PER SECOND)	1688
DRIVE CAPABILITY LOGIC LOADS (QUANTITY)	1666

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1679	THE OVERSHOOT SPIKE VOLTAGE SHALL BE NOT GREATER THAN 1679 VOLT(S) WITH THE OSCILLATOR OPERATING INTO A RESISTANCE LOAD.
1680	THE OVERSHOOT SPIKE VOLTAGE SHALL BE NOT GREATER THAN 1680 VOLT(S) WITH THE OSCILLATOR OPERATING INTO AN IMPEDANCE LOAD.
1681	THE TROUGH VOLTAGE PEAK SHALL BE NOT LESS THAN 1681 VOLT(S) IN EACH HALF-CYCLE WITH AN IMPEDANCE LOAD.
1682	THE OUTPUT WAVE PULSE DURATION SHALL BE 1682 NANOSECOND(S).
1683	THE OUTPUT WAVE PULSE DURATION SHALL BE 1683 MICROSECOND(S).
1684	THE OUTPUT WAVE PULSE DURATION SHALL BE 1684 *MILLISECOND*(S).
1685	THE RISE AND FALL TIME SHALL BE NOT GREATER THAN 1685 NANOSECOND(S).
1686	THE RISE AND FALL TIME SHALL BE NOT GREATER THAN 1686 MICROSECOND(S).
1687	THE RISE AND FALL TIME SHALL BE NOT GREATER THAN 1687 MILLISECOND(S).
1688	THE PULSE REPETITION FREQUENCY SHALL BE 1688 PULSE(S) PER SECOND.
1666	THE OSCILLATOR SHALL BE CAPABLE OF DRIVING 1666 LOGIC LOAD(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VOLTAGE PROTECTION	
NO DAMAGE	
+(VOLTS DC)	1689
-(VOLTS DC)	1690
WARM-UP TIME (SELECT ONE)	
(SECONDS)	1691
(MINUTES)	1692
FREQUENCY ADJUSTMENT (PARTS PER MILLION)	1693
MAXIMUM RESOLUTION (PARTS PER MILLION)	1694

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE | STANDARD PARAGRAPH

VOLTAGE PROTECTION.

1689 THE OSCILLATOR SHALL NOT EXPERIENCE DAMAGE WITH PLUS 1689 VOLT(S) DC INPUT.

1690 THE OSCILLATOR SHALL NOT EXPERIENCE DAMAGE WITH MINUS 1690 VOLT(S) DC INPUT.

1691 WARM-UP TIME. THE WARM-UP OR STABILIZATION TIME SHALL BE 1691 SECOND(S).

1692 WARM-UP TIME. THE WARM-UP OR STABILIZATION TIME SHALL BE 1692 MINUTE(S).

1693 FREQUENCY ADJUSTMENT. THE MECHANICAL FREQUENCY ADJUSTMENT RANGE SHALL BE 1693 PPM.

1694 THE RESOLUTION FOR MECHANICAL FREQUENCY ADJUSTMENT SHALL BE NOT GREATER THAN 1694 PPM.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PIN FUNCTIONS	
(SEE PIN FUNCTIONS TABLE)	
CONNECTORS	
(SEE CONNECTORS TABLE)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

PIN FUNCTIONS. THE FUNCTION OF EACH PIN BY NUMBER SHALL BE IN ACCORDANCE WITH THE FOLLOWING TABLE:

PIN FUNCTIONS TABLE

PIN NO.	FUNCTION
1	3000
2	3001
3	3002
4	3003
5	3004
6	3005
7	3006
8	3007
9	3008
10	3009
11	3010
12	3011
13	3012
14	3013

CONNECTORS. THE DESIGNATION OF THE CONNECTORS SHALL BE IN ACCORDANCE WITH THE FOLLOWING TABLE:

CONNECTORS TABLE

INPUT OR OUTPUT	TYPE OR SERIES	VENDOR FSCM OR SPECIFICATION	FIGURE SIDE NUMBER
2450	2451	2452	2453
2454	2455	2456	2457
2458	2459	2460	2461
2462	2463	2464	2465
2466	2467	2468	2469

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINALS	
ILLUSTRATION 087-10-1 (LETTERS)	1695
SEAL TYPE (SELECT ONE)	
SOLDER.	1697
DUST COVER.	1698
HERMETIC.	1699
ENCAPSULATION.	1700
O-RING.	1701
WEIGHT	
MAXIMUM WEIGHT/MASS PER UNIT (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
(GRAMS)	7021
(KILOGRAMS)	7024

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1695	TERMINALS. THE TERMINAL CONFIGURATION(S) SHALL BE ACCORDING TO LETTER(S) 1695 AS SELECTED FROM ILLUSTRATION 087-10-1.
1697	SEAL TYPE. THE OSCILLATOR SHALL BE SEALED BY SOLDER.
1698	SEAL TYPE. THE OSCILLATOR SHALL BE SEALED BY A DUST COVER.
1699	SEAL TYPE. THE OSCILLATOR SHALL BE HERMETICALLY SEALED.
1700	SEAL TYPE. THE OSCILLATOR SHALL BE SEALED BY ENCAPSULATION.
1701	SEAL TYPE. THE OSCILLATOR SHALL BE SEALED BY AN O-RING.
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7023	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).
7021	MAXIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	MAXIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	6272
NO EVIDENCE OF PHYSICAL DAMAGE.	6273
REMAIN WITHIN SPECIFIED TOLERANCE.	6277
NO DISCONTINUITY.	7345
DURING TEST CHARACTERISTICS TO BE MET:	
OUTPUT FREQUENCY STABILITY.	1715
OUTPUT FREQUENCY.	1716
POWER OUTPUT.	1717
VOLTAGE OUTPUT.	1718
WAVESHAPE.	1719
AFTER TEST CHARACTERISTICS TO BE MET:	
OUTPUT FREQUENCY STABILITY.	1720
OUTPUT FREQUENCY.	1721
POWER OUTPUT.	1722
VOLTAGE OUTPUT.	1723

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6272	ACCELERATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6272.
6273	ACCELERATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6277	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
7345	THERE SHALL BE NO ELECTRICAL DISCONTINUITY DURING THE TEST.
1715	OUTPUT FREQUENCY STABILITY CHARACTERISTICS SHALL BE MET DURING THE TEST.
1716	OUTPUT FREQUENCY CHARACTERISTICS SHALL BE MET DURING THE TEST.
1717	POWER OUTPUT CHARACTERISTICS SHALL BE MET DURING THE TEST.
1718	VOLTAGE OUTPUT CHARACTERISTICS SHALL BE MET DURING THE TEST.
1719	WAVESHAPE CHARACTERISTICS SHALL BE MET DURING THE TEST.
1720	OUTPUT FREQUENCY STABILITY CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1721	OUTPUT FREQUENCY CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1722	POWER OUTPUT CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1723	VOLTAGE OUTPUT CHARACTERISTICS SHALL BE MET AFTER THE TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WAVESHAPE.	1724
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	6250
PER MIL-STD-202, METHOD 212.	6251
*TEST CONDITION LETTER (SELECT ONE)	
TEST CONDITION LETTER A.	6226
*LEVEL (SELECT ONE)	
20 G'S.	4863
50 G'S.	4864
100 G'S.	4865
TEST CONDITION LETTER B.	6233
*LEVEL (SELECT ONE)	
10000 G'S.	4868
20000 G'S.	4892
DIRECTION (SELECT ONE)	
ONE DIRECTION.	1557
BOTH DIRECTIONS.	1558
TEST CONDITION LETTER C.	6239
*LEVEL (G'S.)	4893

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1724	WAVESHAPE CHARACTERISTICS SHALL BE MET AFTER THE TEST.
6250	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6250.
6251	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 212 OF MIL-STD-202.
6226	TEST CONDITION LETTER A SHALL APPLY.
4863	THE TEST LEVEL SHALL BE 20 G'S.
4864	THE TEST LEVEL SHALL BE 50 G'S.
4865	THE TEST LEVEL SHALL BE 100 G'S.
6233	TEST CONDITION LETTER B SHALL APPLY.
4868	THE TEST LEVEL SHALL BE 10000 G'S.
4892	THE TEST LEVEL SHALL BE 20000 G'S.
1557	THE SPECIMEN(S) SHALL BE ACCELERATED IN ONE DIRECTION ONLY.
1558	THE SPECIMEN(S) SHALL BE ACCELERATED IN BOTH DIRECTIONS.
6239	TEST CONDITION LETTER C SHALL APPLY.
4893	THE TEST LEVEL SHALL BE 4893 G'S.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOUNTING (SELECT ONE)	
MOUNT BY ANY SUITABLE METHOD.	6263
MOUNT BY NORMAL METHOD.	6264
MOUNT PER DOCUMENT (DOC DES)	6265
PERCENT RATED LOAD APPLIED (PERCENT)	6210
AGING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1738
AS FOLLOWS:	2102
MAXIMUM FREQUENCY CHANGE	
PER DAY (PARTS PER MILLION)	1739
PER WEEK (PARTS PER MILLION)	1740
(PARTS PER MILLION)	1741
*OVER (DAYS)	1742
(PARTS PER MILLION)	1743
*OVER (DAYS)	1744
PER YEAR (PARTS PER MILLION)	1745

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6263	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
6264	MOUNTING SHALL BE BY THE NORMAL METHOD.
6265	MOUNTING SHALL BE IN ACCORDANCE WITH 6265.
6210	THE ELECTRICAL LOAD SHALL BE 6210 PERCENT OF THE RATED LOAD.
1738	AGING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1738.
2102	AGING. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1739	THE FREQUENCY CHANGE PER DAY SHALL BE NOT GREATER THAN 1739 PPM.
1740	THE FREQUENCY CHANGE PER WEEK SHALL BE NOT GREATER THAN 1740 PPM.
1741 1742	THE FREQUENCY CHANGE SHALL BE NOT GREATER THAN 1741 PPM OVER 1742 DAY(S) OF TEST.
1743 1744	THE FREQUENCY CHANGE SHALL BE NOT GREATER THAN 1743 PPM OVER 1744 DAY(S) OF TEST.
1745	THE FREQUENCY CHANGE PER YEAR SHALL BE NOT GREATER THAN 1745 PPM.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1729
PER MIL-O-55310.	1730
MINIMUM TEST DURATION (SELECT ONE)	
(HOURS)	1731
(DAYS)	1732
MEASUREMENT INTERVALS (HOURS)	1733
TEST TEMPERATURE (DEGREES CELSIUS)	1735
ALTITUDE, LOW PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1754
AS FOLLOWS:	2104
REMAIN WITHIN SPECIFIED TOLERANCE.	1755
NO DISCONTINUITY.	1756
DURING TEST CHARACTERISTICS TO BE MET:	
OUTPUT FREQUENCY STABILITY.	1757

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1729	AGING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1729.
1730	AGING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-O-55310.
1731	THE DURATION OF THE AGING TEST SHALL BE NOT LESS THAN 1731 HOUR(S).
1732	THE DURATION OF THE AGING TEST SHALL BE NOT LESS THAN 1732 DAY(S).
1733	MEASUREMENTS SHALL BE TAKEN AT INTERVALS OF EVERY 1733 HOUR(S).
1735	THE AGING TEST TEMPERATURE SHALL BE 1735 DEGREES CELSIUS.
1754	ALTITUDE, LOW PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1754.
2104	ALTITUDE, LOW PRESSURE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1755	THE DEVICE SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1756	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1757	OUTPUT FREQUENCY STABILITY CHARACTERISTICS SHALL BE MET DURING THE TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OUTPUT FREQUENCY.	1758
POWER OUTPUT.	1759
VOLTAGE OUTPUT.	1760
WAVESHAPE.	1761
AFTER TEST CHARACTERISTICS TO BE MET:	
OUTPUT FREQUENCY STABILITY.	1762
OUTPUT FREQUENCY.	1763
POWER OUTPUT.	1764
VOLTAGE OUTPUT.	1765
WAVESHAPE.	1766
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1750
PER MIL-STD-810, METHOD 500.	1751
DURATION OF OPERATION (HOURS)	1752

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1758	OUTPUT FREQUENCY CHARACTERISTICS SHALL BE MET DURING THE TEST.
1759	POWER OUTPUT CHARACTERISTICS SHALL BE MET DURING THE TEST.
1760	VOLTAGE OUTPUT CHARACTERISTICS SHALL BE MET DURING THE TEST.
1761	WAVESHAPE CHARACTERISTICS SHALL BE MET DURING THE TEST.
1762	OUTPUT FREQUENCY STABILITY CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1763	OUTPUT FREQUENCY CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1764	POWER OUTPUT CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1765	VOLTAGE OUTPUT CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1766	WAVESHAPE CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1750	ALTITUDE, LOW PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1750.
1751	ALTITUDE, LOW PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 500 OF MIL-STD-810.
1752	THE DURATION OF OPERATION AND MEASUREMENTS SHALL BE 1752 HOURS.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PROCEDURE (SELECT ONE)	
I (ALTITUDE)	2144
II (ALTITUDE)	2146
III.	2148
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4908
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4906
MAXIMUM LEAKAGE (MILLIAMPERES)	4894
REMAIN WITHIN SPECIFIED TOLERANCE.	4901
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4884
PER MIL-STD-202, METHOD 301.	6300
*ALTITUDE PER METHOD 105 OF MIL-STD-202	
*TEST CONDITION (LETTER)	4886

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2144	PROCEDURE I TEST ALTITUDE SHALL BE 2144.
2146	PROCEDURE II TEST ALTITUDE SHALL BE 2146.
2148	PROCEDURE III SHALL APPLY.
4908	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4908.
4906	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4894	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4894 MILLIAMPERE(S).
4901	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4884	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4884.
6300	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.
4886	ALTITUDE SHALL BE IN ACCORDANCE WITH TEST CONDITION LETTER 4886 OF METHOD 105 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*TEST VOLTAGE (SELECT ONE)	
(VOLTS DC)	4885
(VOLTS AC)	4849
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	6311
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	6312
BETWEEN MUTUALLY INSULATED PARTS.	6292
BETWEEN ALL INSULATED PARTS AND GROUND.	6293
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	6294
BETWEEN B+ AND B- TERMINALS.	1768
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4859
DURATION OF VOLTAGE APPLICATION (SECONDS)	4891
MOUNTING PER DOCUMENT (DOC DES)	6280
REGULATION OF TEST VOLTAGE (PERCENT)	6308
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4900

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4885	TEST VOLTAGE SHALL BE 4885 VOLTS DC.
4849	TEST VOLTAGE SHALL BE 4849 VOLTS AC.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
6311	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
6312	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
6292	BETWEEN MUTUALLY INSULATED PARTS.
6293	BETWEEN ALL INSULATED PARTS AND GROUND.
6294	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
1768	THE POINT OF VOLTAGE APPLICATION SHALL BE BETWEEN B PLUS TERMINAL AND B MINUS TERMINAL.
4859	SPECIAL PREPARATION SHALL BE IN ACCORDANCE WITH 4859.
4891	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4891 SECOND(S).
6280	MOUNTING SHALL BE IN ACCORDANCE WITH 6280.
6308	REGULATION OF THE TEST VOLTAGE SHALL BE WITHIN 6308 PERCENT.
4900	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4900 KILOVOLTAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4902
(MILLIAMPERES)	6310
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4874
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4856
MAXIMUM LEAKAGE (MILLIAMPERES)	4875
REMAIN WITHIN SPECIFIED TOLERANCE.	4847
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4861
PER MIL-STD-202, METHOD 301.	4862
*TEST VOLTAGE (SELECT ONE)	
(VOLTS DC)	4854
(VOLTS AC)	4855

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4902	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4902 AMPERE(S).
6310	THE SURGE CURRENT SHALL BE NOT GREATER THAN 6310 MILLIAMPERE(S).
4874	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.
4856	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4875	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4875 MILLIAMPERE(S).
4847	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4861	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861.
4862	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.
4854	TEST VOLTAGE SHALL BE 4854 VOLTS DC.
4855	TEST VOLTAGE SHALL BE 4855 VOLTS AC.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	4842
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	4848
BETWEEN MUTUALLY INSULATED PARTS.	4844
BETWEEN MUTUALLY INSULATED PARTS AND GROUND.	4845
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	4846
BETWEEN B+ AND B- TERMINALS.	1770
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4850
DURATION OF VOLTAGE APPLICATION (SECONDS)	4867
MOUNTING PER DOCUMENT (DOC DES)	5000
REGULATION OF TEST VOLTAGE (PERCENT)	4869
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4870

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
4842	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
4848	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
4844	BETWEEN MUTUALLY INSULATED PARTS.
4845	BETWEEN ALL INSULATED PARTS AND GROUND.
4846	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
1770	THE POINT OF VOLTAGE APPLICATION SHALL BE BETWEEN B PLUS TERMINAL AND B MINUS TERMINAL.
4850	SPECIAL PREPARATION OR CONDITIONS SHALL BE IN ACCORDANCE WITH 4850.
4867	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4867 SECOND(S).
5000	MOUNTING SHALL BE IN ACCORDANCE WITH 5000.
4869	REGULATION OF TEST VOLTAGE SHALL BE WITHIN 4869 PERCENT.
4870	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4870 KILOVOLTAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4717
(MILLIAMPERES)	4897
METHOD OF VOLTAGE CONNECTION PER DOCUMENT (DOC DES)	6267
ELECTROMAGNETIC INTERFERENCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1783
PER MIL-STD-461.	1784
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1775
PER MIL-STD-462.	2150
*AS FOLLOWS:	
CE (TWO DIGITS)	1777
RE (TWO DIGITS)	1778

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4717	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4717 AMPERE(S).
4897	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4897 MILLIAMPERE(S)
6267	METHOD OF CONNECTION OF TEST VOLTAGE SHALL BE IN ACCORDANCE WITH 6267.
1783	ELECTROMAGNETIC INTERFERENCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1783.
1784	ELECTROMAGNETIC INTERFERENCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH MIL-STD-461.
1775	ELECTROMAGNETIC INTERFERENCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1775.
2150	ELECTROMAGNETIC INTERFERENCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE FOLLOWING TEST METHOD(S) OF MIL-STD-462.
1777	CE 1777.
1778	RE 1778.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CS (TWO DIGITS)	1779
RS (TWO DIGITS)	1780
UM (TWO DIGITS)	1781
FREQUENCY STABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1791
AS FOLLOWS:	2106
MAXIMUM VARIATION (PPM)	1792
*TEMPERATURES FROM (DEGREES CELSIUS)	1793
*TO (DEGREES CELSIUS)	1794
MAXIMUM VARIATION (PPM)	1795
*SECOND TEMPERATURES FROM (DEGREES CELSIUS)	1796
*TO (DEGREES CELSIUS)	1797
MAXIMUM VARIATION +(PERCENT)	1798
*TEMPERATURES FROM (DEGREES CELSIUS)	1799
*TO (DEGREES CELSIUS)	1800
MAXIMUM VARIATION (PPM)	1801
*SUPPLY VOLTAGE FROM (VOLTS DC)	1802
*TO (VOLTS DC)	1803
MAXIMUM VARIATION (PPM) ADDITIONAL SET OF	1804
*SUPPLY VOLTAGE FROM (VOLTS DC)	1805
*TO (VOLTS DC)	1806

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1779	CS 1779.
1780	RS 1780.
1781	UM 1781.

1791 FREQUENCY STABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1791.

2106 FREQUENCY STABILITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

1792 THE VARIATION IN FREQUENCY SHALL BE NOT GREATER THAN 1792
1793 PPM WHILE EXPOSED TO TEMPERATURES BETWEEN 1973 DEGREES
1794 CELSIUS AND 1794 DEGREES CELSIUS.

1795 THE VARIATION IN FREQUENCY SHALL BE NOT GREATER THAN 1795
1796 PPM WHILE EXPOSED TO SECOND TEMPERATURES BETWEEN 1796
1797 DEGREES CELSIUS AND 1797 DEGREES CELSIUS.

1798 THE VARIATION IN OSCILLATOR FREQUENCY SHALL BE NOT GREATER
1799 THAN PLUS OR MINUS 1798 PERCENT WHILE EXPOSED TO
1800 TEMPERATURES BETWEEN 1799 DEGREES CELSIUS AND 1800 DEGREES CELSIUS.

1801 THE VARIATION IN OSCILLATOR FREQUENCY SHALL BE NOT GREATER
1802 THAN 1801 PPM WHILE VARYING THE SUPPLY VOLTAGE BETWEEN
1803 1802 VOLT(S) DC AND 1803 VOLT(S) DC.

1804 THE VARIATION IN OSCILLATOR FREQUENCY SHALL BE NOT GREATER
1805 THAN 1804 PPM WHILE VARYING THE SUPPLY VOLTAGE AN
1806 ADDITIONAL SET OF VALUES BETWEEN 1805 VOLT(S) DC AND 1806 VOLT(S) DC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM VARIATION (PPM)	1807
*VOLTAGE CHANGE (VOLTS DC)	1808
MAXIMUM VARIATION (PPM)	1809
*IMPEDANCE CHANGE FROM (OHMS)	1810
*TO (OHMS)	1811
MAXIMUM VARIATION (PPM)	1817
*IMPEDANCE CHANGE (PERCENT)	1818
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1786
PER MIL-O-55310.	1787
MAXIMUM RATE TEMPERATURE CHANGE (DEGREES CELSIUS PER MINUTE)	1788
MINIMUM FREQUENCY MEASUREMENTS (QUANTITY)	1789
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4760
FUNGUS RESISTANCE BY CERTIFICATION OR BY TEST.	4761

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1807 1808	THE VARIATION IN OSCILLATOR FREQUENCY SHALL BE NOT GREATER THAN 1807 PPM WITH A VOLTAGE CHANGE OF 1808 VOLT(S) DC.
1809 1810 1811	THE VARIATION IN OSCILLATOR FREQUENCY SHALL BE NOT GREATER THAN 1809 PPM WHEN OPERATING INTO AN IMPEDANCE LOAD BETWEEN 1810 OHM(S) AND 1811 OHM(S).
1817 1818	THE VARIATION IN FREQUENCY SHALL BE NOT GREATER THAN 1817 PPM WHEN OUTPUT IMPEDANCE IS VARIED 1818 PERCENT.
1786	FREQUENCY STABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1786.
1787	FREQUENCY STABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-O-55310.
1788	THE RATE OF TEMPERATURE CHANGE OVER TEMPERATURE RANGE SHALL BE NOT GREATER THAN 1788 DEGREES CELSIUS PER MINUTE.
1789	THERE SHALL BE A MINIMUM OF 1789 FREQUENCY MEASUREMENT(S).
4760	FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.
4761	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED, THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NO EVIDENCE OF FUNGUS GROWTH WHEN TESTED.	4762
AFTER TEST CHARACTERISTICS TO BE MET:	
OUTPUT FREQUENCY STABILITY.	1812
OUTPUT FREQUENCY.	1813
POWER OUTPUT.	1814
VOLTAGE OUTPUT.	1815
WAVESHAPE.	1816
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4754
PER MIL-STD-810, METHOD 508.	4755
TEST PERIOD (DAYS)	4756

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4762	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
1812	OUTPUT FREQUENCY STABILITY CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1813	OUTPUT FREQUENCY CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1814	POWER OUTPUT CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1815	VOLTAGE OUTPUT CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1816	WAVESHAPE CHARACTERISTICS SHALL BE MET AFTER THE TEST.
4754	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.
4755	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.
4756	TEST PERIOD SHALL BE 4756 DAY(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4798
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	4799
NO DEGRADATION OF PERFORMANCE.	4815
REMAIN WITHIN SPECIFIED TOLERANCE.	4791
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1477
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	4795
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	4805
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	4813
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	4803
DURING TEST CHARACTERISTICS TO BE MET:	
OUTPUT FREQUENCY STABILITY.	1824
OUTPUT FREQUENCY.	1825

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4798	HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.
4799	HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
4815	THERE SHALL BE NO DEGRADATION OF PERFORMANCE.
4791	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1477	THERE SHALL BE NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DIELECTRIC WITHSTANDING VOLTAGE IS PERFORMED.
4795	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4795 MEGOHM(S) AT HIGH HUMIDITY.
4805	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4805 MEGOHM(S) AFTER DRYING.
4813	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4813 MILLIAMPERE(S) AT HIGH HUMIDITY.
4803	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4803 MILLIAMPERE(S) AFTER DRYING.
1824	OUTPUT FREQUENCY STABILITY CHARACTERISTICS SHALL BE MET DURING THE TEST.
1825	OUTPUT FREQUENCY CHARACTERISTICS SHALL BE MET DURING THE TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
POWER OUTPUT.	1826
VOLTAGE OUTPUT.	1827
WAVESHAPE.	1828
AFTER TEST CHARACTERISTICS TO BE MET:	
OUTPUT FREQUENCY STABILITY.	1829
OUTPUT FREQUENCY.	1830
POWER OUTPUT.	1831
VOLTAGE OUTPUT.	1832
WAVESHAPE.	1833
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4788
PER MIL-STD-202, METHOD 103.	4853
*TEST CONDITION (LETTER)	4890
POLARIZING VOLTAGE (VOLTS, DC)	4793
DURATION OF POLARIZING VOLTAGE APPLICATION (HOURS)	4790

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1826	POWER OUTPUT CHARACTERISTICS SHALL BE MET DURING THE TEST.
1827	VOLTAGE OUTPUT CHARACTERISTICS SHALL BE MET DURING THE TEST.
1828	WAVESHAPE CHARACTERISTICS SHALL BE MET DURING THE TEST.
1829	OUTPUT FREQUENCY STABILITY CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1830	OUTPUT FREQUENCY CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1831	POWER OUTPUT CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1832	VOLTAGE OUTPUT CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1833	WAVESHAPE CHARACTERISTICS SHALL BE MET AFTER THE TEST.
4788	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.
4853	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 103 OF MIL-STD-202.
4890	TEST CONDITION LETTER 4890 SHALL APPLY.
4793	MAGNITUDE OF THE POLARIZING VOLTAGE SHALL BE 4793 VOLTS DC.
4790	DURATION OF APPLICATION OF VOLTAGE SHALL BE 4790 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
POINTS OF APPLICATION OF POLARIZING VOLTAGE:	
BETWEEN MUTUALLY INSULATED PARTS.	4969
BETWEEN ALL INSULATED PARTS AND GROUND.	4970
BETWEEN CURRENT CARRYING PARTS AND CASE.	4971
BETWEEN CURRENT CARRYING PARTS AND GROUND.	6202
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	6207
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	6206
LOADING VOLTAGE (SELECT ONE)	
(VOLTS DC)	1820
(VOLTS AC)	1821
COVER TEMPERATURE (DEGREES CELSIUS)	1822
IMPEDANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1841
IMPEDANCE (OHMS)	1842
TOLERANCE ±(PERCENT)	1843

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
4969	BETWEEN MUTUALLY INSULATED PARTS.
4970	BETWEEN ALL INSULATED PARTS AND GROUND.
4971	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
6202	BETWEEN CURRENT CARRYING PARTS AND GROUND.
6207	DIELECTRIC WITHSTANDING VOLTAGE TEST SHALL BE PERFORMED AT HIGH HUMIDITY.
6206	DIELECTRIC WITHSTANDING VOLTAGE TEST SHALL BE PERFORMED AFTER DRYING.
1820	THE LOADING VOLTAGE SHALL BE 1820 VOLT(S) DC.
1821	THE LOADING VOLTAGE SHALL BE 1821 VOLT(S) AC.
1822	THE OSCILLATOR COVER TEMPERATURE SHALL BE 1822 DEGREES CELSIUS.
1841	IMPEDANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1841.
1842	IMPEDANCE. THE OUTPUT IMPEDANCE SHALL BE 1842 OHM(S).
1843	THE OUTPUT IMPEDANCE TOLERANCE SHALL BE PLUS OR MINUS 1843 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1838
PER MIL-O-55310.	1839
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1380
AS FOLLOWS:	6359
*MINIMUM INSULATION RESISTANCE (SELECT ONE)	
SINGLE TEST	
(MEGOHMS)	1386
MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	1384
*SECOND TEST (MEGOHMS)	1387
REMAIN WITHIN SPECIFIED TOLERANCE.	1388
NO EVIDENCE OF PHYSICAL DAMAGE.	1407

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1838	IMPEDANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1838.
1839	IMPEDANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-O-55310.
1380	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.
6359	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1386	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1386 MEGOHM(S).
1384	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1384 MEGOHM(S) AT THE FIRST TEST TEMPERATURE.
1387	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1387 MEGOHM(S) AT THE SECOND TEST TEMPERATURE.
1388	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1407	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1371
PER MIL-STD-202, METHOD 302.	1511
*CONDITION (SELECT ONE)	
TEST CONDITION (LETTER)	1378
TEST VOLTAGE (VOLTS DC)	1373
ELECTRIFICATION TIME (SECONDS)	1376
MAXIMUM MEASUREMENT ERROR AT REQUIRED VALUE (PERCENT)	1377
POINTS OF MEASUREMENT:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	1497
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	1498
BETWEEN MUTUALLY INSULATED PARTS.	1522
BETWEEN INSULATED PARTS AND GROUND.	1523
BETWEEN CURRENT CARRYING PARTS AND CASE.	1524
SPECIAL PREPARATIONS OR CONDITIONS PER DOCUMENT (DOC DES)	1520

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1371	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.
1511	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 302 OF MIL-STD-202.
1378	TEST CONDITION LETTER 1378 SHALL APPLY.
1373	TEST POTENTIAL SHALL BE 1373 VOLT(S) DC.
1376	ELECTRIFICATION DURATION SHALL BE 1376 SECOND(S).
1377	THE MEASUREMENT ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1377 PERCENT.
	POINTS OF INSULATION RESISTANCE MEASUREMENT SHALL BE AS FOLLOWS:
1497	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
1498	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
1522	BETWEEN MUTUALLY INSULATED PARTS.
1523	BETWEEN ALL INSULATED PARTS AND GROUND.
1524	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
1520	SPECIAL PREPARATIONS OR CONDITIONS SHALL BE IN ACCORDANCE WITH 1520.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FIRST TEST TEMPERATURE (DEGREES CELSIUS)	1372
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	1381
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1383
MOISTURE RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1400
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	1396
REMAIN WITHIN SPECIFIED TOLERANCE.	1398
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1394
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	1429
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	1404
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	1432
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	1406

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1372	FIRST TEST TEMPERATURE SHALL BE 1372 DEGREES CELSIUS.
1381	SECOND TEST TEMPERATURE SHALL BE 1381 DEGREES CELSIUS.
1383	TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1383 DEGREES CELSIUS.
1400	MOISTURE RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1400.
1396	MOISTURE RESISTANCE. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
1398	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1394	THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING OR INSULATION BREAKDOWN, WHEN DIELECTRIC WITHSTANDING VOLTAGE IS APPLIED.
1429	CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1429 MILLIAMPERE(S) AT HIGH HUMIDITY.
1404	CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1404 MILLIAMPERE(S) AFTER DRYING.
1432	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1432 MEGOHM(S) AT HIGH HUMIDITY.
1406	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1406 MEGOHM(S) AFTER DRYING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DURING TEST CHARACTERISTICS TO BE MET:	
OUTPUT FREQUENCY STABILITY.	1849
OUTPUT FREQUENCY.	1850
POWER OUTPUT.	1851
VOLTAGE OUTPUT.	1852
WAVESHAPE.	1853
AFTER TEST CHARACTERISTICS TO BE MET:	
OUTPUT FREQUENCY STABILITY.	1854
OUTPUT FREQUENCY.	1855
POWER OUTPUT.	1856
VOLTAGE OUTPUT.	1857
WAVESHAPE.	1858
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1391
PER MIL-STD-202, METHOD 106.	1397
POLARIZING VOLTAGE (VOLTS DC)	1395

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1849	OUTPUT FREQUENCY STABILITY CHARACTERISTICS SHALL BE MET DURING THE TEST.
1850	OUTPUT FREQUENCY CHARACTERISTICS SHALL BE MET DURING THE TEST.
1851	POWER OUTPUT CHARACTERISTICS SHALL BE MET DURING THE TEST.
1852	VOLTAGE OUTPUT CHARACTERISTICS SHALL BE MET DURING THE TEST.
1853	WAVESHAPE CHARACTERISTICS SHALL BE MET DURING THE TEST.
1854	OUTPUT FREQUENCY STABILITY CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1855	OUTPUT FREQUENCY CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1856	POWER OUTPUT CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1857	VOLTAGE OUTPUT CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1858	WAVESHAPE CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1391	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1391.
1397	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 106 OF MIL-STD-202.
1395	POLARIZING VOLTAGE SHALL BE 1395 VOLT(S), DC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LOADING VOLTAGE (SELECT ONE)	
(VOLTS DC)	4981
(VOLTS AC)	4980
PERCENT OF SAMPLE SUBJECTED TO POLARIZING VOLTAGE (PERCENT)	4991
STEP 7A NOT APPLICABLE.	4985
STEP 7B NOT APPLICABLE.	4986
MOUNT PER DOCUMENT (DOC DES)	1449
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	4983
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	4984
NOISE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1876
AS FOLLOWS:	2108
MAXIMUM LEVEL (DECIBELS)	1877
INAUDIBLE.	1878

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4981	LOADING VOLTAGE SHALL BE 4981 VOLT(S) DC.
4980	LOADING VOLTAGE SHALL BE 4980 VOLT(S) AC.
4991	4991 PERCENT OF THE SAMPLE SHALL BE SUBJECTED TO THE POLARIZING VOLTAGE.
4985	STEP 7A OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
4986	STEP 7B OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
1449	MOUNTING SHALL BE IN ACCORDANCE WITH 1449.
4983	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.
4984	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.
1876	NOISE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1876.
2108	NOISE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1877	THE OSCILLATOR NOISE LEVEL SHALL BE NOT GREATER THAN 1877 DECIBEL(S).
1878	DC OSCILLATOR NOISE SHALL BE INAUDIBLE TO A PERSON WITH NORMAL HEARING.

Source: https://assist.dla.mil - Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MINIMUM SIGNAL TO NOISE RATIO (DECIBELS)	1879
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1863
PER (DOC DES)	1864
INPUT VOLTAGE (VOLTS DC)	1865
LOAD CAPACITANCE (PICOFARADS)	1867
MEASUREMENT DISTANCE (SELECT ONE)	
(INCHES)	1868
(FEET)	1869
(METERS)	1970
(MILLIMETERS)	1880
BACKGROUND NOISE ABOVE REFERENCE NOISE LEVEL (DECIBELS)	1871

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1879	THE SIGNAL TO NOISE RATIO SHALL BE NOT LESS THAN 1879 DECIBEL(S).
1863	NOISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1863.
1864	NOISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1864.
1865	THE INPUT VOLTAGE SHALL BE 1865 VOLT(S) DC.
1867	THE TOTAL CAPACITANCE OUTPUT LOAD ON THE OSCILLATOR SHALL BE 1867 PICOFARAD(S).
1868	AUDIBLE NOISE SHALL BE MEASURED 1868 INCH(S) FROM THE OSCILLATOR.
1869	AUDIBLE NOISE SHALL BE MEASURED 1869 FEET FROM THE OSCILLATOR.
1870	AUDIBLE NOISE SHALL BE MEASURED 1870 METER(S) FROM THE OSCILLATOR.
1880	AUDIBLE NOISE SHALL BE MEASURED 1880 MILLIMETER(S) FROM THE OSCILLATOR.
1871	THE BACKGROUND NOISE LEVEL SHALL BE 1871 DECIBEL(S) ABOVE REFERENCED NOISE WHEN OSCILLATOR IS OPERATED FROM NO LOAD TO FULL LOAD.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
REFERENCE LEVEL (HERTZ)	1872
REFERENCE INTENSITY (SELECT ONE)	
(WATTS PER SQUARE CENTIMETER)	1873
(MICRONEWTONS PER SQUARE METER)	1874
OPERATIONAL SAFETY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1896
AS FOLLOWS:	2110
NO DAMAGE FROM REVERSE VOLTAGE.	1897
NO DAMAGE WITH OUTPUT SHORTED OR OPEN.	1898
NO DAMAGE FROM OVERLOAD.	1899
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1884
PER MIL-O-52374.	1885
APPLIED REVERSE VOLTAGE -(VOLTS DC)	1886

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1872	THE REFERENCE LEVEL FOR NOISE MEASUREMENT SHALL BE 1872 HERTZ.
1873	THE REFERENCE LEVEL FOR NOISE MEASUREMENT SHALL HAVE AN INTENSITY OF 1873 WATT(S) PER SQUARE CENTIMETER.
1874	THE REFERENCE LEVEL FOR NOISE MEASUREMENT SHALL HAVE AN INTENSITY OF 1874 MICRONEWTON(S) PER SQUARE METER.
1896	OPERATIONAL SAFETY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1896.
2110	OPERATIONAL SAFETY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1897	THERE SHALL BE NO DAMAGE TO THE OSCILLATOR FROM THE APPLICATION OF REVERSE VOLTAGE.
1898	THE OSCILLATOR SHALL START, OPERATE AND NOT BE DAMAGED WITH NORMAL VOLTAGE APPLIED, WITH THE OUTPUT SHORT CIRCUITED, OR OPEN CIRCUITED, OR UNDER FULL LOAD.
1899	THE OSCILLATOR SHALL START, OPERATE AND NOT BE DAMAGED WITH NORMAL VOLTAGE APPLIED, WITH THE OUTPUT UNDER OVERLOAD CONDITIONS, AND WITH A TOTAL CAPACITIVE LOAD.
1884	OPERATIONAL SAFETY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1884.
1885	OPERATIONAL SAFETY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-O-52374.
1886	APPLIED REVERSE VOLTAGE SHALL BE MINUS 1886 VOLT(S) DC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MINIMUM DURATION, CIRCUIT OPEN (MINUTES)	1887
MINIMUM DURATION AT FULL LOAD (MINUTES)	1888
APPLIED NORMAL VOLTAGE +(VOLTS DC)	1889
MINIMUM DURATION OUTPUT SHORTED (MINUTES)	1890
MINIMUM DURATION, CIRCUIT OPEN (MINUTES)	1891
MINIMUM DURATION, FULL LOAD (HOURS)	1892
SECOND APPLIED VOLTAGE +(VOLTS DC)	1893
TOTAL OUTPUT LOAD (PICOFARADS)	1894
RESISTANCE TO SOLDERING HEAT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4700
NO EVIDENCE OF PHYSICAL DAMAGE.	4701
REMAIN WITHIN SPECIFIED TOLERANCE.	4718
AFTER TEST CHARACTERISTICS TO BE MET:	
OUTPUT FREQUENCY STABILITY.	1903

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1887	THE DURATION OF APPLIED REVERSE VOLTAGE SHALL BE NOT LESS THAN 1887 MINUTE(S) WITH THE CIRCUIT OPEN.
1888	THE DURATION OF APPLIED REVERSE VOLTAGE SHALL BE NOT LESS THAN 1888 MINUTE(S) WITH A FULL OUTPUT LOAD.
1889	THE APPLIED NORMAL VOLTAGE SHALL BE PLUS 1889 VOLTS DC.
1890	THE DURATION OF APPLICATION OF NORMAL VOLTAGE SHALL BE NOT LESS THAN 1890 MINUTE(S) WITH SHORT CIRCUITED OUTPUT.
1891	THE DURATION OF APPLICATION OF NORMAL VOLTAGE SHALL BE NOT LESS THAN 1891 MINUTE(S) WITH OPEN CIRCUITED OUTPUT.
1892	THE DURATION OF APPLIED VOLTAGE SHALL BE NOT LESS THAN 1892 HOUR(S) WITH OUTPUT UNDER FULL LOAD.
1893	THE SECOND APPLIED NORMAL VOLTAGE SHALL BE PLUS 1893 VOLT(S) DC.
1894	THERE SHALL BE 1894 PICOFARAD(S) TOTAL CAPACITANCE OUTPUT LOAD ON THE OSCILLATOR.
4700	RESISTANCE TO SOLDERING HEAT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4700.
4701	RESISTANCE TO SOLDERING HEAT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4718	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1903	OUTPUT FREQUENCY STABILITY CHARACTERISTICS SHALL BE MET AFTER TEST.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OUTPUT FREQUENCY.	1904
POWER OUTPUT.	1905
VOLTAGE OUTPUT.	1906
WAVESHAPE.	1907
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4689
PER MIL-STD-202, METHOD 210.	4698
*TEST CONDITION (LETTER)	4691
NUMBER OF TERMINATIONS TESTED (QUANTITY)	4694
DEPTH OF IMMERSION IN SOLDER (SELECT ONE)	
(INCHES)	4692
(MILLIMETERS)	4669
IMMERSION IN FLUX PERMITTED.	4671
SPECIAL PREPARATIONS PERMITTED.	4989
COOLING TIME (MINUTES)	4695

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1904	OUTPUT FREQUENCY CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1905	POWER OUTPUT CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1906	VOLTAGE OUTPUT CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1907	WAVESHAPE CHARACTERISTICS SHALL BE MET AFTER THE TEST.
4689	RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4689.
4698	RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 210 OF MIL-STD-202.
4691	TEST CONDITION LETTER 4691 SHALL APPLY.
4694	4694 TERMINATION(S) PER UNIT SHALL BE TESTED.
4692	DEPTH OF IMMERSION IN SOLDER SHALL BE 4692 INCH(S).
4669	DEPTH OF IMMERSION IN SOLDER SHALL BE 4669 MILLIMETER(S).
4671	IMMERSION OF TERMINATION IN FLUX SHALL BE PERMITTED.
4989	SPECIAL PREPARATION SHALL BE PERMITTED.
4695	COOLING TIME SHALL BE 4695 MINUTE(S) PRIOR TO FINAL EXAMINATION AND MEASUREMENTS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO SOLVENTS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4834
NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.	4830
MARKING SHALL REMAIN LEGIBLE.	4836
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4829
PER MIL-STD-202, METHOD 215.	4839
SOLVENTS TO BE ADDED (NAME)	4838
SOLVENTS TO BE DELETED (SUBPARAGRAPH LETTER)	4835
BRUSHED AREA (SELECT ONE)	
BRUSH MARKING AREA.	4831
ALL OF SPECIMEN TO BE BRUSHED.	6279

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4834	RESISTANCE TO SOLVENTS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4834.
4830	RESISTANCE TO SOLVENTS. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
4836	MARKING SHALL REMAIN LEGIBLE.
4829	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4829.
4839	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 215 OF MIL-STD-202. THE SPECIMEN(S) SHALL BE DIVIDED INTO GROUPS OF EQUAL NUMBER TO THE EXTENT POSSIBLE.
4838	IN ADDITION TO THE SPECIFIED SOLVENT(S), 4838 SHALL ALSO BE USED.
4835	BRUSHING SHALL BE PERFORMED WITH THE SOLVENTS IN ACCORDANCE WITH METHOD 215 OF MIL-STD-202, EXCEPT THAT SOLUTION(S) 4835 SHALL NOT BE USED.
4831	THE MARKING AREA SHALL BE BRUSHED.
6279	THE ENTIRE SURFACE SHALL BE BRUSHED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT SPRAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4878
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE.	4782
AFTER TEST CHARACTERISTICS TO BE MET:	
OUTPUT FREQUENCY STABILITY.	1911
OUTPUT FREQUENCY.	1912
POWER OUTPUT.	1913
VOLTAGE OUTPUT.	1914
WAVESHAPE.	1915
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4770
PER MIL-STD-202, METHOD 101.	4771
*TEST CONDITION (LETTER)	4772

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4878	SALT SPRAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4878.
4782	SALT SPRAY. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
1911	OUTPUT FREQUENCY STABILITY CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1912	OUTPUT FREQUENCY CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1913	POWER OUTPUT CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1914	VOLTAGE OUTPUT CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1915	WAVESHAPE CHARACTERISTICS SHALL BE MET AFTER THE TEST.
4770	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4770.
4771	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 101 OF MIL-STD-202.
4772	TEST CONDITION LETTER 4772 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOUNTING (SELECT ONE)	
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4773
MOUNTING SHALL BE BY NORMAL METHOD.	4765
MOUNTING SHALL BE BY ANY SUITABLE METHOD.	4766
SEAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4745
AS FOLLOWS:	6370
SPECIFIED TEST METHOD SENSITIVITY.	4746
NO BUBBLES INDICATIVE OF LEAKAGE.	4748
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4734
PER MIL-STD-202, METHOD 112.	4732
*TEST CONDITION LETTER	
LETTER A.	4737
LIQUID FOR BATH (NAME)	4738

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4773	MOUNTING SHALL BE IN ACCORDANCE WITH 4773.
4765	MOUNTING SHALL BE BY THE NORMAL METHOD.
4766	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4745	SEAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4745.
6370	SEAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
4746	THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE SPECIFIED TEST METHOD SENSITIVITY.
4748	THERE SHALL BE NO BUBBLES INDICATIVE OF LEAKAGE.
4734	SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4734.
4732	SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 112 OF MIL-STD-202.
4737	TEST CONDITION LETTER A SHALL APPLY.
4738	LIQUID FOR BUBBLE TEST BATH SHALL BE 4738.

Source: https://assist.dla.mil Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MINIMUM BATH TEMPERATURE (DEGREES CELSIUS)	4739
LETTER B.	6320
LIQUID FOR BATH (NAME)	6321
MINIMUM BATH TEMPERATURE (DEGREES CELSIUS)	6322
LETTER C.	6323
*LEAK RATE SENSITIVITY (ATM CC/SEC)	4741
*TEST PROCEDURE (SELECT ONE)	
TEST PROCEDURE I.	4740
BACKFILL PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	4742
(KILOPASCALS)	4736
TEST PROCEDURE II.	6324
BACKFILL PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	6325
(KILOPASCALS)	6326
NUMBER OF PRESSURE CYCLES (QUANTITY)	4749

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4739	TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 4739 DEGREES CELSIUS.
6320	TEST CONDITION LETTER B SHALL APPLY.
6321	LIQUID FOR BUBBLE TEST BATH SHALL BE 6321.
6322	TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 6322 DEGREES CELSIUS.
6323	TEST CONDITION LETTER C SHALL APPLY.
4741	LEAK SENSITIVITY RATE SHALL BE 4741 ATM *CC/SEC*.
4740	PROCEDURE NUMBER I SHALL APPLY.
4742	BACKFILL PRESSURE SHALL BE 4742 POUND(S) PER SQUARE INCH.
4736	BACKFILL PRESSURE SHALL BE 4736 KILOPASCAL(S).
6324	PROCEDURE NUMBER II SHALL APPLY.
6325	BACKFILL PRESSURE SHALL BE 6325 POUND(S) PER SQUARE INCH.
6326	BACKFILL PRESSURE SHALL BE 6326 KILOPASCAL(S).
4749	THERE SHALL BE 4749 PRESSURE CYCLE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST PROCEDURE III.	6328
GROSS LEAK TEST CONDITION (LETTER)	4750
TEST PROCEDURE IV.	6329
CHAMBER PRESSURE (SELECT ONE)	
(TORR)	4751
(KILOPASCALS)	4735
DURATION OF REDUCED PRESSURE (MINUTES)	4752
GROSS LEAK TEST CONDITION (LETTER)	6330
LETTER D.	6331
ANY SUITABLE MOUNTING METHOD.	4743
LETTER E.	6332
ANY SUITABLE MOUNTING METHOD.	6333
SHOCK, HIGH IMPACT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1494
NO EVIDENCE OF PHYSICAL DAMAGE.	1495
REMAIN WITHIN SPECIFIED TOLERANCE.	1464
NO DISCONTINUITY DURING TEST.	1451

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6328	PROCEDURE NUMBER III SHALL APPLY.
4750	GROSS LEAK TEST CONDITION LETTER 4750 SHALL APPLY.
6329	PROCEDURE NUMBER IV SHALL APPLY.
4751	CHAMBER PRESSURE SHALL BE 4751 TORR.
4735	CHAMBER PRESSURE SHALL BE 4735 KILOPASCAL(S).
4752	DURATION AT LOW PRESSURE SHALL BE 4752 MINUTE(S).
6330	GROSS LEAK TEST CONDITION LETTER 6330 SHALL APPLY.
6331	TEST CONDITION LETTER D SHALL APPLY.
4743	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
6332	TEST CONDITION LETTER E SHALL APPLY.
6333	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
1494	SHOCK, HIGH IMPACT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1494.
1495	SHOCK, HIGH IMPACT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1464	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1451	THERE SHALL BE NO DISCONTINUITY DURING THE TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
AFTER TEST CHARACTERISTICS TO BE MET:	
OUTPUT FREQUENCY STABILITY.	1927
OUTPUT FREQUENCY.	1928
POWER OUTPUT.	1929
VOLTAGE OUTPUT.	1930
WAVESHAPE.	1931
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1486
PER MIL-STD-202, METHOD 207.	1482
*MOUNTING FIXTURE (SELECT ONE)	
FIGURE NUMBER FROM METHOD 207 OF MIL-STD-202 (NUMBER)	1488
ANY SUITABLE MOUNTING FIXTURE.	1478
MOUNTING FIXTURE PER DOCUMENT (DOC DES)	1468
PERCENT RATED LOAD APPLIED (PERCENT)	6203

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1927	OUTPUT FREQUENCY STABILITY CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1928	OUTPUT FREQUENCY CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1929	POWER OUTPUT CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1930	VOLTAGE OUTPUT CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1931	WAVESHAPE CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1486	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1486.
1482	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 207 OF MIL-STD-202.
1488	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH FIGURE 1488 OF METHOD 207 OF MIL-STD-202.
1478	THE MOUNTING FIXTURE SHALL BE ANY SUITABLE MOUNTING FIXTURE.
1468	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH 1468.
6203	THE ELECTRICAL LOAD SHALL BE 6203 PERCENT OF THE RATED LOAD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, SPECIFIED PULSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1508
NO EVIDENCE OF PHYSICAL DAMAGE.	1509
NO DISCONTINUITY DURING TEST.	1471
REMAIN WITHIN SPECIFIED TOLERANCE.	4703
AFTER TEST CHARACTERISTICS TO BE MET:	
OUTPUT FREQUENCY STABILITY.	1919
OUTPUT FREQUENCY.	1920
POWER OUTPUT.	1921
VOLTAGE OUTPUT.	1922
WAVESHAPE.	1923
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1502
PER MIL-STD-202, METHOD 213.	1500
*TEST CONDITION (LETTER)	1504

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1508	SHOCK, SPECIFIED PULSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1508.
1509	SHOCK, SPECIFIED PULSE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1471	THERE SHALL BE NO DISCONTINUITY DURING THE TEST.
4703	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1919	OUTPUT FREQUENCY STABILITY CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1920	OUTPUT FREQUENCY CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1921	POWER OUTPUT CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1922	VOLTAGE OUTPUT CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1923	WAVESHAPE CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1502	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1502.
1500	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 213 OF MIL-STD-202.
1504	TEST CONDITION LETTER 1504 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	4686
NORMAL MOUNTING METHOD.	4685
MOUNT PER DOCUMENT (DOC DES)	4684
PERCENT RATED LOAD APPLIED (PERCENT)	6204
SOLDERABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4674
NO EVIDENCE OF PHYSICAL DAMAGE.	4675
MEET EVALUATION CRITERIA SPECIFIED IN MIL-STD-202, METHOD 208.	4672
REMAIN WITHIN SPECIFIED TOLERANCE.	4677
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4662
PER MIL-STD-202, METHOD 208.	4683
NUMBER OF TERMINALS TO BE TESTED (QUANTITY)	4666

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4686	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4685	MOUNTING SHALL BE BY THE NORMAL METHOD.
4684	MOUNTING SHALL BE IN ACCORDANCE WITH 4684.
6204	THE ELECTRICAL LOAD SHALL BE 6204 PERCENT OF THE RATED LOAD.
4674	SOLDERABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4674.
4675	SOLDERABILITY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4672	THE RESULTS OF THE SOLDERABILITY TEST SHALL BE IN ACCORDANCE WITH THE ACCEPTANCE CRITERIA OF METHOD 208 OF MIL-STD-202.
4677	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4662	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4662.
4683	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 208 OF MIL-STD-202.
4666	4666 TERMINATION(S) PER UNIT SHALL BE TESTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DEPTH OF IMMERSION (SELECT ONE)	
(INCHES)	4667
(MILLIMETERS)	4663
DISTANCE WRAP WIRE APPLIED FROM BODY (SELECT ONE)	
(INCHES)	4664
(MILLIMETERS)	4665
SPECIAL PREPARATIONS PERMITTED.	6205
START TO STEADY STATE (RISE TIME)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1951
MAXIMUM PERIOD TO REACH STEADY STATE (SECONDS)	1952
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1936
PER MIL-O-52374.	1937
INPUT VOLTAGE (VOLTS DC)	1938

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4667	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4667 INCH(S).
4663	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4663 MILLIMETER(S).
4664	THE WRAP WIRE SHALL BE 4664 INCH(S) FROM THE BODY.
4665	THE WRAP WIRE SHALL BE 4665 MILLIMETER(S) FROM THE BODY.
6205	SPECIAL PREPARATION SHALL BE PERMITTED.
1951	START TO STEADY STATE (RISE TIME). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1951.
1952	START TO STEADY STATE (RISE TIME). THE PERIOD TO START AND REACH STEADY STATE CONDITIONS SHALL BE NOT GREATER THAN 1952 SECOND(S).
1936	START TO STEADY STATE (RISE TIME). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1936.
1937	START TO STEADY STATE (RISE TIME). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-O-52374.
1938	THERE SHALL BE AN INPUT OF 1938 VOLT(S) DC.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
+ CHAMBER TEMPERATURE (DEGREES CELSIUS)	1940
- CHAMBER TEMPERATURE (DEGREES CELSIUS)	1941
PERIOD OF EXPOSURE (MINUTES)	1942
SECOND INPUT VOLTAGE (VOLTS DC)	1943
- CHAMBER TEMPERATURE (DEGREES CELSIUS)	1945
PERIOD OF EXPOSURE (MINUTES)	1946
LOAD IMPEDANCE (OHMS)	1947
LOAD CAPACITANCE (PICOFARADS)	1948
OVERLOAD RADIATION (MILLIWATTS)	1949
STRAY FIELD	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1964
AS FOLLOWS:	2112
NO EVIDENCE OF FLUX LEAKAGE.	1965
MAXIMUM FIELD (GAUSS)	1966

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1940	THE CHAMBER TEMPERATURE SHALL BE PLUS 1940 DEGREES CELSIUS.
1941	THE CHAMBER TEMPERATURE SHALL BE MINUS 1941 DEGREES CELSIUS.
1942	THE SPECIMEN(S) SHALL BE EXPOSED IN THE CHAMBER FOR 1942 MINUTE(S).
1943	THE SECOND APPLIED VOLTAGE SHALL BE 1943 VOLT(S) DC.
1945	DURING THE SECOND APPLICATION OF VOLTAGE THE CHAMBER TEMPERATURE SHALL BE MINUS 1945 DEGREES CELSIUS.
1946	THE SPECIMEN(S) SHALL BE EXPOSED IN THE CHAMBER FOR 1946 MINUTE(S).
1947	THE LOAD IMPEDANCE SHALL BE 1947 OHM(S).
1948	THE LOAD CAPACITANCE SHALL BE 1948 PICOFARAD(S).
1949	THE AMOUNT OF OVERLOAD RADIATION ON THE PHOTO CATHODE OF THE IMAGE CONVERTER SHALL BE 1949 MILLIWATT(S).
1964	STRAY FIELD. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1964.
2112	STRAY FIELD. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1965	THERE SHALL BE NO EVIDENCE OF MAGNETIC FLUX LEAKAGE.
1966	THE MAXIMUM OSCILLATOR STRAY FIELD SHALL BE 1966 GAUSS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MEASUREMENT DISTANCE (SELECT ONE)	
(INCHES)	1967
(MILLIMETERS)	1968
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1957
PER MIL-O-52374.	1958
APPLIED VOLTAGE (VOLTS DC)	1959
OUTPUT CAPACITANCE (PICOFARADS)	1961
IMAGE CONVERTER VOLTAGE (KILOVOLTS)	1962
TEMPERATURE, HIGH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	6228
NO EVIDENCE OF PHYSICAL DAMAGE.	6229
DURING TEST CHARACTERISTICS TO BE MET:	
OUTPUT FREQUENCY STABILITY.	1971
OUTPUT FREQUENCY.	1972

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1967	THE STRAY FIELD SHALL BE MEASURED AT A DISTANCE NOT GREATER THAN 1967 INCH(S) FROM THE OSCILLATOR.
1968	THE STRAY FIELD SHALL BE MEASURED AT A DISTANCE NOT GREATER THAN 1968 MILLIMETER(S) FROM THE OSCILLATOR.
1957	STRAY FIELD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1957.
1958	STRAY FIELD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-O-52374.
1959	THE APPLIED VOLTAGE SHALL BE 1959 VOLTS DC.
1961	THE OUTPUT SHALL BE AT FULL LOAD WITH A TOTAL CAPACITANCE OF 1961 PICOFARAD(S).
1962	A VOLTAGE OF 1962 KILOVOLT(S) SHALL BE APPLIED TO THE IMAGE CONVERTER DURING THE TEST.
6228	TEMPERATURE, HIGH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6228.
6229	TEMPERATURE, HIGH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1971	OUTPUT FREQUENCY STABILITY CHARACTERISTICS SHALL BE MET DURING THE TEST.
1972	OUTPUT FREQUENCY CHARACTERISTICS SHALL BE MET DURING THE TEST.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
POWER OUTPUT.	1973
VOLTAGE OUTPUT.	1974
WAVESHAPE.	1975
AFTER TEST CHARACTERISTICS TO BE MET:	
OUTPUT FREQUENCY STABILITY.	1976
OUTPUT FREQUENCY.	1977
POWER OUTPUT.	1978
VOLTAGE OUTPUT.	1979
WAVESHAPE.	1980
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	6217
PER MIL-STD-810, METHOD 501.	6218
*PROCEDURE (ROMAN NUMERAL)	6219
STORAGE TEMPERATURE (DEGREES CELSIUS)	6220
STORAGE DURATION (HOURS)	6221
HIGHEST OPERATING TEMPERATURE (DEGREES CELSIUS)	6222

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1973	POWER OUTPUT CHARACTERISTICS SHALL BE MET DURING THE TEST.
1974	VOLTAGE OUTPUT CHARACTERISTICS SHALL BE MET DURING THE TEST.
1975	WAVESHAPE CHARACTERISTICS SHALL BE MET DURING THE TEST.
1976	OUTPUT FREQUENCY STABILITY CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1977	OUTPUT FREQUENCY CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1978	POWER OUTPUT CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1979	VOLTAGE OUTPUT CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1980	WAVESHAPE CHARACTERISTICS SHALL BE MET AFTER THE TEST.
6217	TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6217.
6218	TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 501 OF MIL-STD-810.
6219	PROCEDURE NUMBER 6219 SHALL APPLY.
6220	STORAGE TEMPERATURE SHALL BE 6220 DEGREES CELSIUS.
6221	STORAGE DURATION SHALL BE 6221 HOUR(S).
6222	HIGHEST OPERATING TEMPERATURE SHALL BE 6222 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OPERATION TIME (SELECT ONE)	
(MINUTES)	6224
(HOURS)	6225
TEMPERATURE, LOW	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	6318
NO EVIDENCE OF PHYSICAL DAMAGE.	6319
DURING TEST CHARACTERISTICS TO BE MET:	
OUTPUT FREQUENCY STABILITY.	1984
OUTPUT FREQUENCY.	1985
POWER OUTPUT.	1986
VOLTAGE OUTPUT.	1987
WAVESHAPE.	1988
AFTER TEST CHARACTERISTICS TO BE MET:	
OUTPUT FREQUENCY STABILITY.	1989
OUTPUT FREQUENCY.	1990

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6224	OPERATING TIME SHALL BE 6224 MINUTE(S).
6225	OPERATING TIME SHALL BE 6225 HOUR(S).
6318	TEMPERATURE, LOW. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6318.
6319	TEMPERATURE, LOW. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1984	OUTPUT FREQUENCY STABILITY CHARACTERISTICS SHALL BE MET *DURING THE TEST*.
1985	OUTPUT FREQUENCY CHARACTERISTICS SHALL BE MET DURING THE TEST.
1986	POWER OUTPUT CHARACTERISTICS SHALL BE MET DURING THE TEST.
1987	VOLTAGE OUTPUT CHARACTERISTICS SHALL BE MET DURING THE TEST.
1988	WAVESHAPE CHARACTERISTICS SHALL BE MET DURING THE TEST.
1989	OUTPUT FREQUENCY STABILITY CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1990	OUTPUT FREQUENCY CHARACTERISTICS SHALL BE MET AFTER THE TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
POWER OUTPUT.	1991
VOLTAGE OUTPUT.	1992
WAVESHAPE.	1993
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	6231
PER MIL-STD-810, METHOD 502.	6232
STORAGE TEMPERATURE (DEGREES CELSIUS)	6234
STORAGE DURATION (HOURS)	6235
LOWEST OPERATING TEMPERATURE (DEGREES CELSIUS)	6236
CHAMBER AIR VELOCITY (SELECT ONE)	
(FEET PER SECOND)	6237
(METERS PER SECOND)	6238
OPERATION TIME (SELECT ONE)	
(MINUTES)	6315
(HOURS)	6316
TERMINAL STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1418

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1991	POWER OUTPUT CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1992	VOLTAGE OUTPUT CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1993	WAVESHAPE CHARACTERISTICS SHALL BE MET AFTER THE TEST.
6231	TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6231.
6232	TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 502 OF MIL-STD-810.
6234	STORAGE TEMPERATURE SHALL BE 6234 DEGREES CELSIUS.
6235	STORAGE DURATION SHALL BE 6235 HOUR(S).
6236	LOWEST OPERATING TEMPERATURE SHALL BE 6236 DEGREES CELSIUS.
6237	CHAMBER AIR VELOCITY SHALL BE 6237 FEET PER SECOND.
6238	CHAMBER AIR VELOCITY SHALL BE 6238 METER(S) PER SECOND.
6315	OPERATING TIME SHALL BE 6315 MINUTE(S).
6316	OPERATING TIME SHALL BE 6316 HOUR(S).
1418	TERMINAL STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1418.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NO EVIDENCE OF PHYSICAL DAMAGE.	1433
REMAIN WITHIN SPECIFIED TOLERANCE.	6296
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1410
PER MIL-STD-202, METHOD 211.	1375
*TEST CONDITIONS	
TEST CONDITION A, APPLIED FORCE (SELECT ONE)	
(OUNCES)	1995
(POUNDS)	1411
(NEWTONS)	1419
TEST CONDITION B, BENDS (NUMBER)	1412
TEST CONDITION C, LOAD (SELECT ONE)	
(POUNDS)	1413
(KILOGRAMS)	1420

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1433	TERMINAL STRENGTH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6296	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1410	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1410.
1375	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 211 OF MIL-STD-202.
1995	TEST SPECIMEN(S) SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1995 OUNCE(S).
1411	TEST SPECIMEN(S) SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1411 POUND(S).
1419	TEST SPECIMEN(S) SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1419 NEWTON(S).
1412	TEST SPECIMEN(S) SHALL BE SUBJECTED TO TEST CONDITION B. THERE SHALL BE 1412 BEND(S).
1413	TEST SPECIMEN(S) SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1413 POUND(S).
1420	TEST SPECIMEN(S) SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE BE 1420 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST CONDITION D.	1414
TEST CONDITION E, TORQUE (SELECT ONE)	
(POUND-INCHES)	1416
(NEWTON METERS)	1421
THERMAL SHOCK (TEMPERATURE CYCLING)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4722
NO EVIDENCE OF PHYSICAL DAMAGE.	4723
REMAIN WITHIN SPECIFIED TOLERANCE.	4726
DURING TEST CHARACTERISTICS TO BE MET:	
OUTPUT FREQUENCY STABILITY.	1999
OUTPUT FREQUENCY.	2000
POWER OUTPUT.	2001
VOLTAGE OUTPUT.	2002
WAVESHAPE.	2003

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1414	TEST SPECIMEN(S) SHALL BE SUBJECTED TO TEST CONDITION D.
1416	TEST SPECIMEN(S) SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1416 POUND-INCH(S).
1421	TEST SPECIMEN(S) SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1421 NEWTON METER(S).
4722	THERMAL SHOCK (TEMPERATURE CYCLING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4722.
4723	THERMAL SHOCK (TEMPERATURE CYCLING). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4726	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1999	OUTPUT FREQUENCY STABILITY CHARACTERISTICS SHALL BE MET DURING THE TEST.
2000	OUTPUT FREQUENCY CHARACTERISTICS SHALL BE MET DURING THE TEST.
2001	POWER OUTPUT CHARACTERISTICS SHALL BE MET DURING THE TEST.
2002	VOLTAGE OUTPUT CHARACTERISTICS SHALL BE MET DURING THE TEST.
2003	WAVESHAPE CHARACTERISTICS SHALL BE MET DURING THE TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
AFTER TEST CHARACTERISTICS TO BE MET:	
OUTPUT FREQUENCY STABILITY.	2004
OUTPUT FREQUENCY.	2005
POWER OUTPUT.	2006
VOLTAGE OUTPUT.	2007
WAVESHAPE.	2008
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4713
PER MIL-STD-202, METHOD 107.	4714
*TEST CONDITION (LETTER)	4715
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4719
MINIMUM TEMPERATURE CHANGE RATE (DEGREES CELSIUS PER MINUTE)	1997
(CYCLES)	1998
VIBRATION, HIGH FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1455

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2004	OUTPUT FREQUENCY STABILITY CHARACTERISTICS SHALL BE MET AFTER THE TEST.
2005	OUTPUT FREQUENCY CHARACTERISTICS SHALL BE MET AFTER THE TEST.
2006	POWER OUTPUT CHARACTERISTICS SHALL BE MET AFTER THE TEST.
2007	VOLTAGE OUTPUT CHARACTERISTICS SHALL BE MET AFTER THE TEST.
2008	WAVESHAPE CHARACTERISTICS SHALL BE MET AFTER THE TEST.
4713	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4713.
4714	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 107 OF MIL-STD-202.
4715	TEST CONDITION LETTER 4715 SHALL APPLY.
4719	MOUNTING SHALL BE IN ACCORDANCE WITH 4719.
1997	THE RATE OF CHANGE OF AMBIENT TEMPERATURE SHALL BE NOT LESS THAN 1997 DEGREES CELSIUS PER MINUTE.
1998	THERE SHALL BE 1998 EXPOSURE CYCLE(S).
1455	VIBRATION, HIGH FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1455.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NO EVIDENCE OF PHYSICAL DAMAGE.	1456
NO DISCONTINUITY DURING TEST.	1473
REMAIN WITHIN SPECIFIED TOLERANCE.	1469
AFTER TEST CHARACTERISTICS TO BE MET:	
OUTPUT FREQUENCY STABILITY.	2012
OUTPUT FREQUENCY.	2013
POWER OUTPUT.	2014
VOLTAGE OUTPUT.	2015
WAVESHAPE.	2016
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1446
PER MIL-STD-202, METHOD 204.	1447
*TEST CONDITION (LETTER)	1448
PERCENT RATED LOAD APPLIED (PERCENT)	6200
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4709

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1456	VIBRATION, HIGH FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1473	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1469	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
2012	OUTPUT FREQUENCY STABILITY CHARACTERISTICS SHALL BE MET AFTER THE TEST.
2013	OUTPUT FREQUENCY CHARACTERISTICS SHALL BE MET AFTER THE TEST.
2014	POWER OUTPUT CHARACTERISTICS SHALL BE MET AFTER THE TEST.
2015	VOLTAGE OUTPUT CHARACTERISTICS SHALL BE MET AFTER THE TEST.
2016	WAVESHAPE CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1446	VIBRATION, HIGH FREQUNCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1446.
1447	VIBRATION, HIGH FREQUNCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 204 OF MIL-STD-202.
1448	TEST CONDITION LETTER 1448 SHALL APPLY.
6200	THE LOAD SHALL BE 6200 PERCENT OF THE RATED LOAD.
4709	MOUNTING SHALL BE BY ANY SUITABLE METHOD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NORMAL MOUNTING METHOD.	4708
MOUNT PER DOCUMENT (DOC DES)	4707
METHOD OF DETERMINING MECHANICAL RESONANCE (SELECT ONE)	
VISUALLY BY MEANS OF A STROBOTAC.	1533
ELECTRICAL OUTPUT INDICATORS.	1534
VIBRATION, LOW FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1475
NO EVIDENCE OF PHYSICAL DAMAGE.	1476
REMAIN WITHIN SPECIFIED TOLERANCE.	1480
NO DISCONTINUITY DURING TEST.	1490
DURING TEST CHARACTERISTICS TO BE MET:	
OUTPUT FREQUENCY STABILITY.	2020
OUTPUT FREQUENCY.	2021
POWER OUTPUT.	2022

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4708	MOUNTING SHALL BE BY THE NORMAL METHOD.
4707	MOUNTING SHALL BE IN ACCORDANCE WITH 4707.
1533	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE VISUALLY BY MEANS OF A STROBOTAC.
1534	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE BY ELECTRICAL OUTPUT INDICATORS.
1475	VIBRATION, LOW FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1475.
1476	VIBRATION, LOW FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1480	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1490	THERE SHALL BE NO DISCONTINUITY DURING TEST.
2020	OUTPUT FREQUENCY STABILITY CHARACTERISTICS SHALL BE MET DURING THE TEST.
2021	OUTPUT FREQUENCY CHARACTERISTICS SHALL BE MET DURING THE TEST.
2022	POWER OUTPUT CHARACTERISTICS SHALL BE MET DURING THE TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VOLTAGE OUTPUT.	2023
WAVESHAPE.	2024
AFTER TEST CHARACTERISTICS TO BE MET:	
OUTPUT FREQUENCY STABILITY.	2025
OUTPUT FREQUENCY.	2026
POWER OUTPUT.	2027
VOLTAGE OUTPUT.	2028
WAVESHAPE.	2029
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1466
PER MIL-STD-202, METHOD 201.	1467
DURATION OF VIBRATION PER AXIS (HOURS)	1470
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4731
NORMAL MOUNTING METHOD.	4730
MOUNT PER DOCUMENT (DOC DES)	4729

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2023	VOLTAGE OUTPUT CHARACTERISTICS SHALL BE MET DURING THE TEST.
2024	WAVESHAPE CHARACTERISTICS SHALL BE MET DURING THE TEST.
2025	OUTPUT FREQUENCY STABILITY CHARACTERISTICS SHALL BE MET AFTER THE TEST.
2026	OUTPUT FREQUENCY CHARACTERISTICS SHALL BE MET AFTER THE TEST.
2027	POWER OUTPUT CHARACTERISTICS SHALL BE MET AFTER THE TEST.
2028	VOLTAGE OUTPUT CHARACTERISTICS SHALL BE MET AFTER THE TEST.
2029	WAVESHAPE CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1466	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1466.
1467	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 201 OF MIL-STD-202.
1470	DURATION OF TEST SHALL BE 1470 HOUR(S) PER AXIS.
4731	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4730	MOUNTING SHALL BE BY THE NORMAL METHOD.
4729	MOUNTING SHALL BE IN ACCORDANCE WITH 4729.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIRECTION OF MOTION	
PARALLEL TO LONGITUDINAL AXIS.	1535
PERPENDICULAR TO LONGITUDINAL AXIS.	1536
ON THE CENTERLINE OF MOST SENSITIVE AXIS.	4979
90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.	4978
THREE MUTUALLY PERPENDICULAR DIRECTIONS.	1537
PERCENT RATED LOAD APPLIED (PERCENT)	6201
VIBRATION, RANDOM	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1435
NO EVIDENCE OF PHYSICAL DAMAGE.	1436
REMAIN WITHIN SPECIFIED TOLERANCE.	1538
NO DISCONTINUITY.	1374
AFTER TEST CHARACTERISTICS TO BE MET:	
OUTPUT FREQUENCY STABILITY.	2033

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1535	THE DIRECTION OF MOTION SHALL BE PARALLEL TO THE LONGITUDINAL AXIS.
1536	THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE LONGITUDINAL AXIS.
4979	THE DIRECTION OF MOTION SHALL BE ON THE CENTERLINE OF THE MOST SENSITIVE AXIS.
4978	THE DIRECTION OF MOTION SHALL BE 90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.
1537	THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUALLY PERPENDICULAR DIRECTIONS.
6201	THE LOAD SHALL BE 6201 PERCENT OF THE RATED LOAD.
1435	VIBRATION, RANDOM. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1435.
1436	VIBRATION, RANDOM. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1538	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1374	THERE SHALL BE NO DISCONTINUITY DURING TEST.
2033	OUTPUT FREQUENCY STABILITY CHARACTERISTICS SHALL BE MET AFTER THE TEST.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OUTPUT FREQUENCY.	2034
POWER OUTPUT.	2035
VOLTAGE OUTPUT.	2036
WAVESHAPE.	2037
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1426
PER MIL-STD-202, METHOD 214.	1427
*TEST CONDITION (ROMAN NUMERAL AND LETTER)	1428
*DURATION OF APPLICATION (SELECT ONE)	
(MINUTES)	1438
(HOURS)	1431
MONITORING INSTRUMENTATION OF EXCITATION (SELECT ONE)	
ANY SUITABLE SYSTEM.	1452
CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.	1453
CALIBRATED OSCILLOSCOPE.	1459

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2034	OUTPUT FREQUENCY CHARACTERISTICS SHALL BE MET AFTER THE TEST.
2035	POWER OUTPUT CHARACTERISTICS SHALL BE MET AFTER THE TEST.
2036	VOLTAGE OUTPUT CHARACTERISTICS SHALL BE MET AFTER THE TEST.
2037	WAVESHAPE CHARACTERISTICS SHALL BE MET AFTER THE TEST.
1426	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1426.
1427	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 214 OF MIL-STD-202.
1428	TEST CONDITION NUMBER AND LETTER 1428 SHALL APPLY.
1438	THE DURATION OF THE TEST SHALL BE 1438 MINUTE(S).
1431	THE DURATION OF THE TEST SHALL BE 1431 HOUR(S).
1452	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE ANY SUITABLE INSTRUMENTATION SYSTEM.
1453	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.
1459	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED OSCILLOSCOPE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NUMBER OF VIBRATION MONITORING TEST POINTS (QUANTITY)	1430
LOCATION OF MONITORING POINTS (SELECT ONE)	
ANY SUITABLE LOCATION.	1439
AS CLOSE AS PRACTICAL TO TEST SPECIMEN.	1462
PERCENT OF RATED LOAD APPLIED (PERCENT)	4678
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4977
NORMAL MOUNTING METHOD.	4976
MOUNT PER DOCUMENT (DOC DES)	4975

PERFORMANCE CHARACTERISTICS (SEE TABLE X, DOD-STD-35)

NOTE: AUTOMATIC WHEN TABLE X IS USED.

MOUNTING HARDWARE (SEE TABLE VIII, DOD-STD-35)

NOTE: AUTOMATIC WHEN TABLE VIII IS USED.

WORKMANSHIP

(DOC DES) 6870

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1430	THERE SHALL BE 1430 VIBRATION MONITORING POINT(S).
1439	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE ANY SUITABLE LOCATION.
1462	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE AS CLOSE AS PRACTICAL TO THE TEST SPECIMEN(S).
4678	THE LOAD SHALL BE 4678 PERCENT OF THE RATED LOAD.
4977	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4976	MOUNTING SHALL BE BY THE NORMAL METHOD.
4975	MOUNTING SHALL BE IN ACCORDANCE WITH 4975.

PERFORMANCE CHARACTERISTICS. PERFORMANCE CHARACTERISTICS SHALL BE AS SHOWN IN THE PERFORMANCE CHARACTERISTICS TABLE.

MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.

6870 WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.

6372 PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.

7630 PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.

7629 PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.

ADDITIONAL PART MARKING.

6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DEFINITION OF HERMETIC SEALING	
NOTE: AUTOMATIC WHEN CODE 1699 IS USED TO REQUIRE HERMETIC SEALING.	
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

DEFINITION OF HERMETIC SEALING.

DEFINITION OF HERMETIC SEALING. FOR THE PURPOSE OF THIS DOCUMENT, A HERMETICALLY-SEALED ITEM IS ONE IN WHICH THE ELEMENT IS CONTAINED WITHIN A SEALED ENCLOSURE OF CERAMIC, GLASS OR METAL, OR A COMBINATION THEREOF, WHERE SEALING IS ACCOMPLISHED BY MATERIAL FUSION, WELDING, BRAZING OR SOLDERING.

Custodians:
Army-MI

User activity:
Army-MU

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

Preparing activity:
Army-MI


(Project EDS-A359)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX A


ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

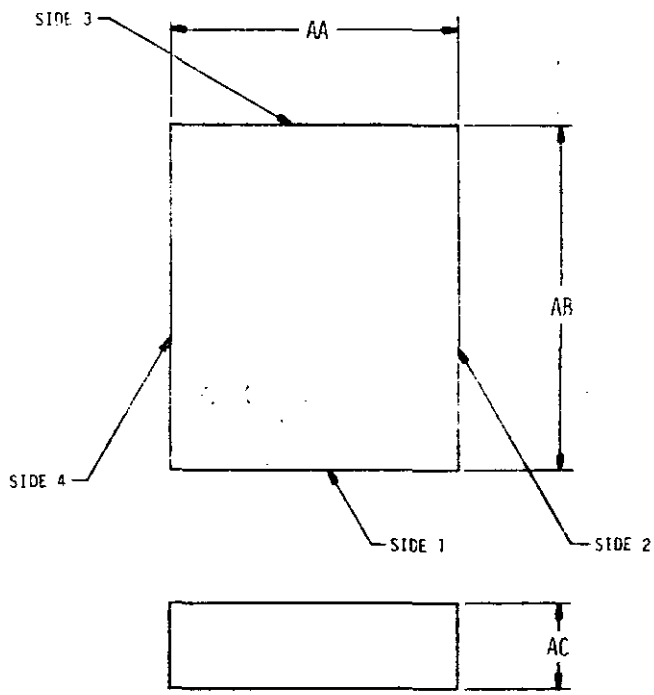


087-01-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

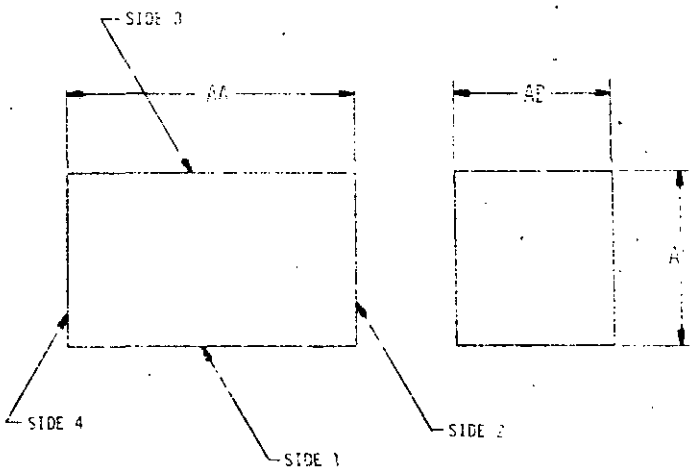



087-01-2

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

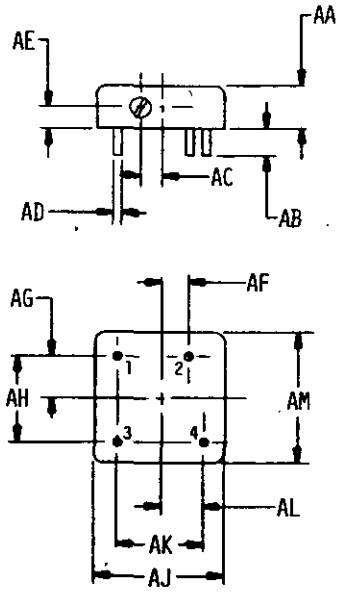


087-02-1

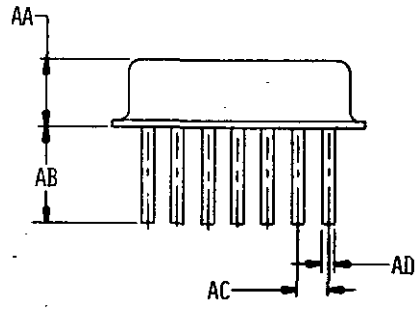

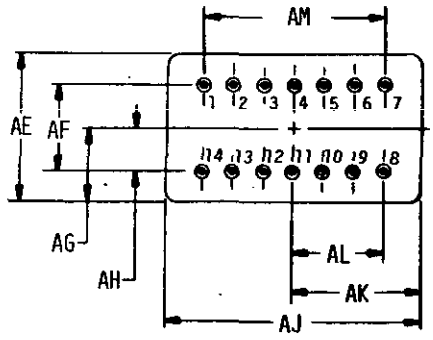


087-02-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

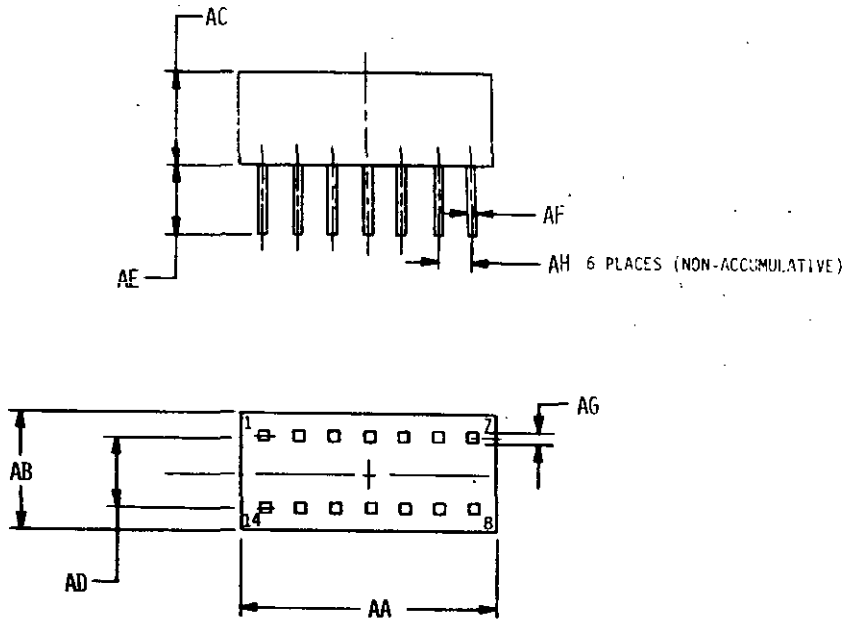


087-02-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

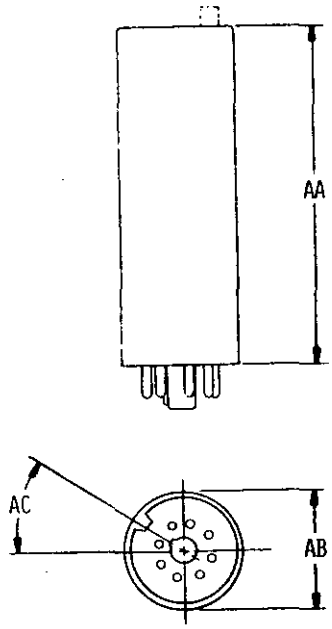


087-03-1

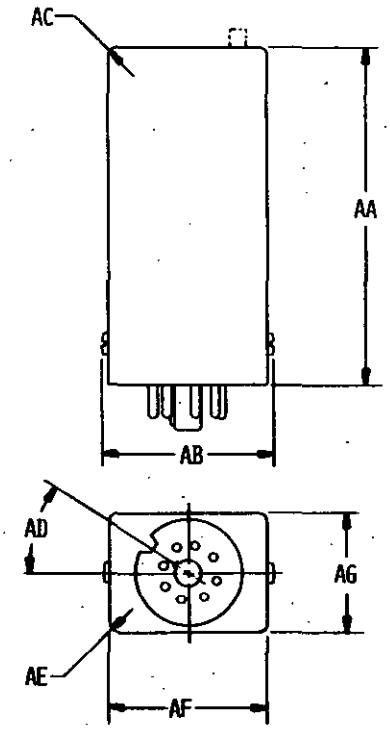


087-03-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

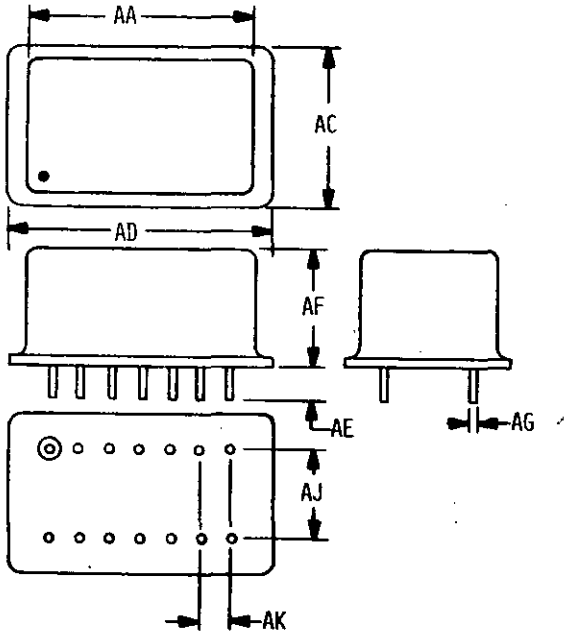



087-03-3

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

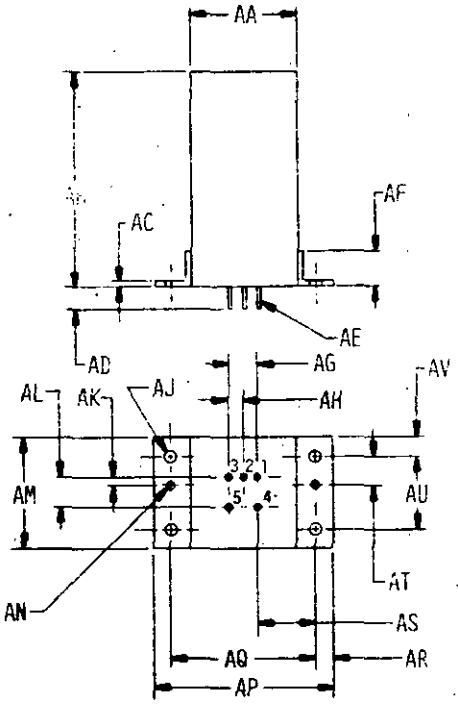

087-04-1

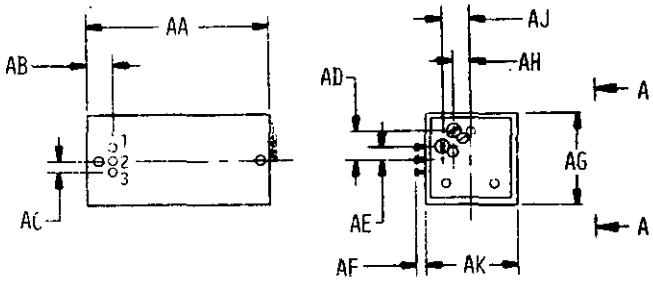


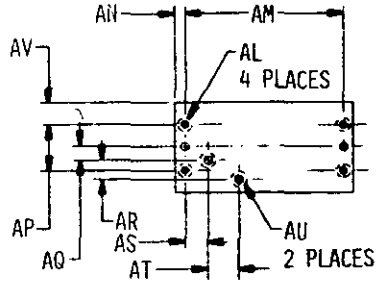


VIEW A-A

087-04-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

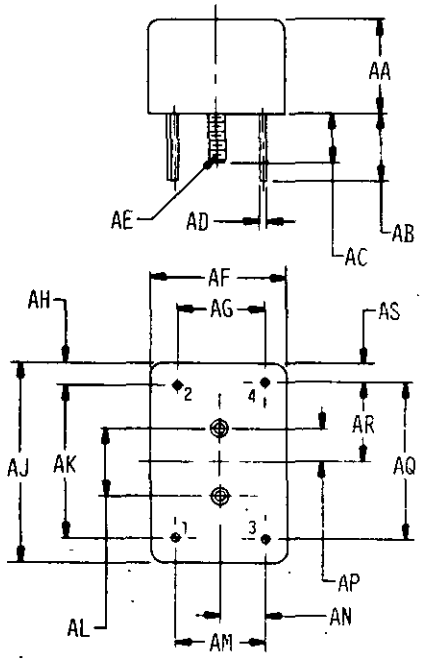


087-05-1

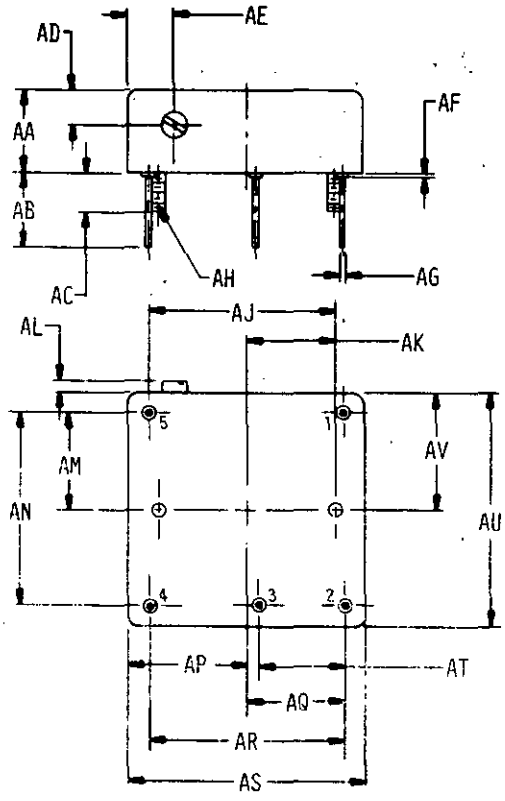



087-05-2

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

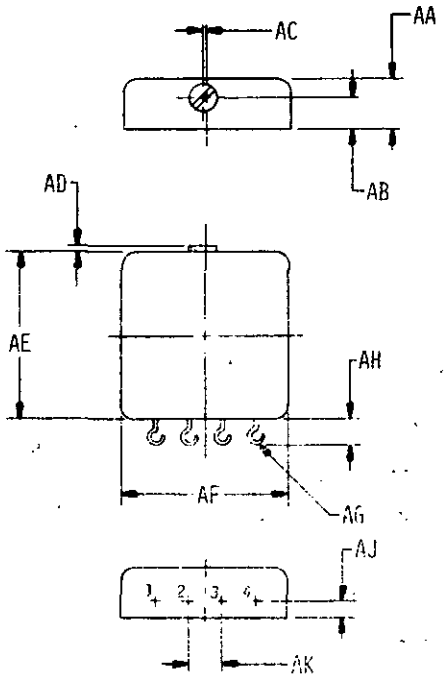


087-06-1

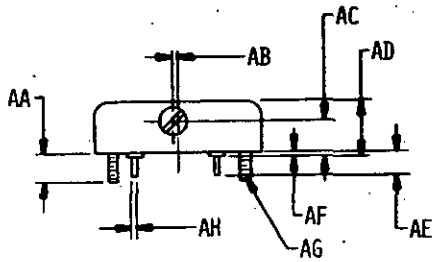

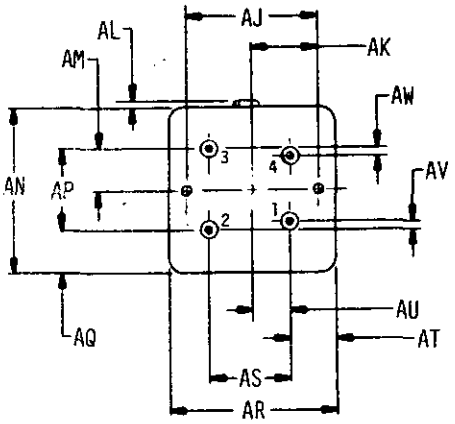


087-06-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

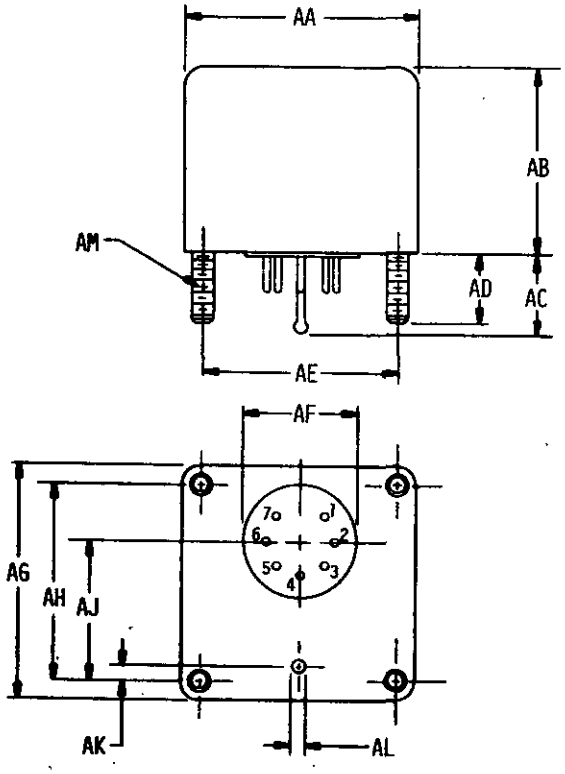


087-06-3

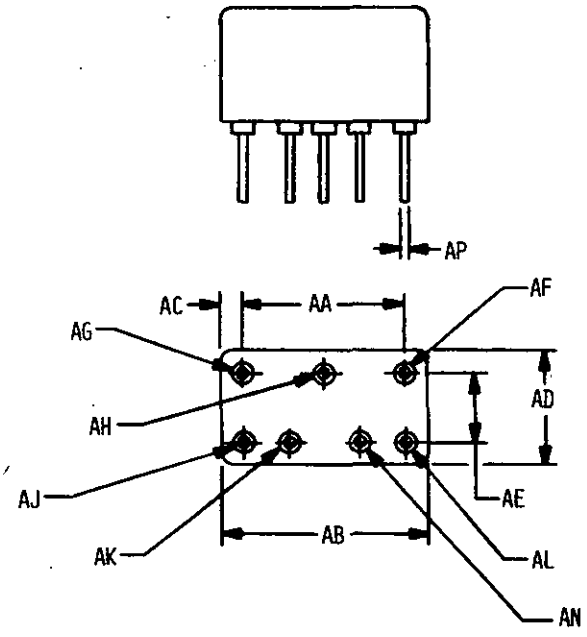


087-06-4

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

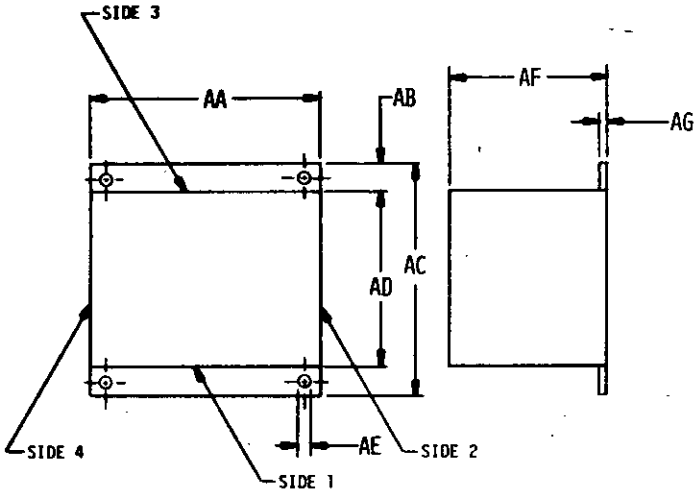


087-07-1

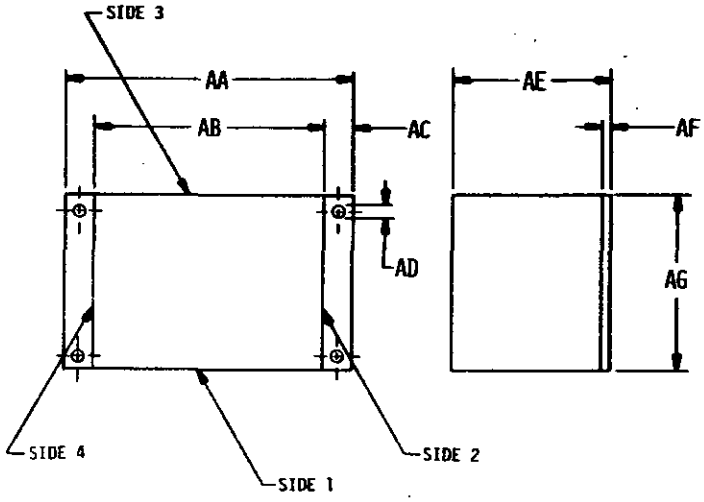


087-07-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

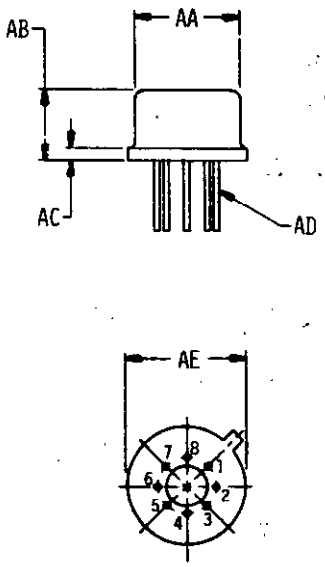


087-08-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

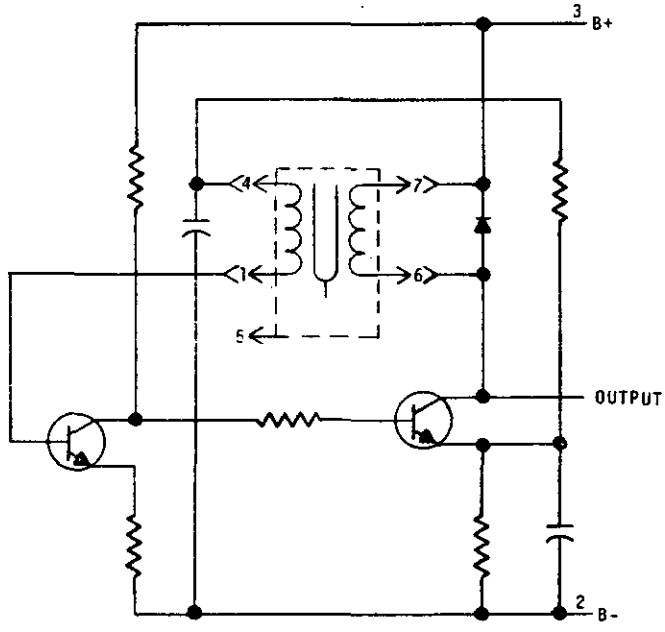

087-09-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

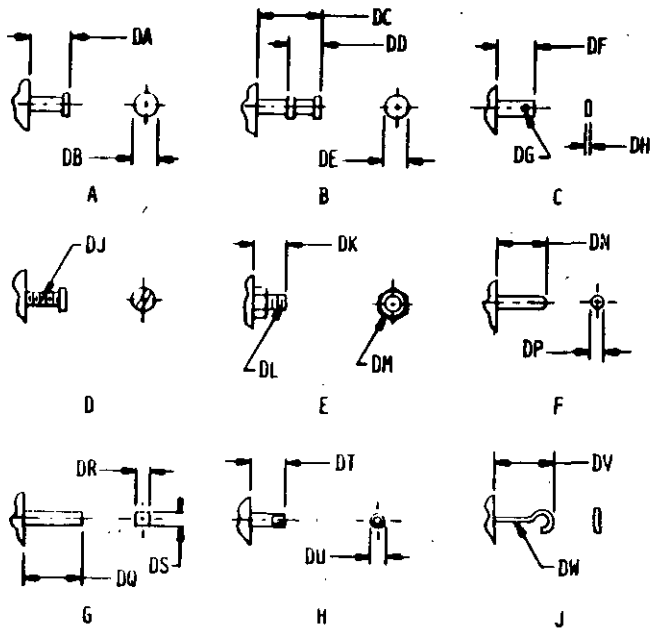

087-10-1

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	10	1411	124	1475	132	1571	32
0102	10	1412	124	1476	132	1572	32
0103	10	1413	124	1477	72	1573	32
0104	10	1414	126	1478	106	1574	32
0105	10	1416	126	1480	132	1575	32
0107	12	1418	122	1482	106	1576	32
0108	12	1419	124	1486	106	1577	32
0700	10	1420	124	1488	106	1578	34
0800	10	1421	126	1490	132	1579	34
1004	10	1426	138	1494	104	1580	34
1005	10	1427	138	1495	104	1581	34
1006	10	1428	138	1497	80	1582	34
1008	10	1429	82	1498	80	1583	34
1009	14	1430	140	1500	108	1584	34
1371	80	1431	138	1502	108	1585	34
1372	82	1432	82	1504	108	1586	34
1373	80	1433	124	1508	108	1587	34
1374	136	1435	136	1509	108	1588	34
1375	124	1436	136	1511	80	1589	34
1376	80	1438	138	1520	80	1590	34
1377	80	1439	140	1522	80	1591	34
1378	80	1446	130	1523	80	1592	36
1380	78	1447	130	1524	80	1593	36
1381	82	1448	130	1533	132	1594	36
1383	82	1449	86	1534	132	1595	20
1384	78	1451	104	1535	136	1596	20
1386	78	1452	138	1536	136	1597	20
1387	78	1453	138	1537	136	1598	20
1388	78	1455	128	1538	136	1599	20
1391	84	1456	130	1557	48	1600	20
1394	82	1459	138	1558	48	1601	20
1395	84	1462	140	1562	30	1602	20
1396	82	1464	104	1563	30	1603	22
1397	84	1466	134	1564	30	1604	22
1398	82	1467	134	1565	32	1605	22
1400	82	1468	106	1566	32	1606	22
1404	82	1469	130	1567	32	1607	22
1406	82	1470	134	1568	32	1608	22
1407	78	1471	108	1569	32	1609	22
1410	124	1473	130	1570	32	1610	22

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1611	22	1654	30	1717	46	1775	64
1612	22	1655	30	1718	46	1777	64
1613	22	1656	30	1719	46	1778	64
1614	22	1658	30	1720	46	1779	66
1615	22	1659	30	1721	46	1780	66
1616	22	1660	36	1722	46	1781	66
1617	24	1661	36	1723	46	1783	64
1618	24	1662	36	1724	48	1784	64
1620	24	1663	36	1729	52	1786	68
1621	24	1664	36	1730	52	1787	68
1622	24	1665	36	1731	52	1788	68
1623	24	1666	38	1732	52	1789	68
1624	24	1675	36	1733	52	1791	66
1625	24	1678	36	1735	52	1792	66
1626	24	1679	38	1738	50	1793	66
1627	24	1680	38	1739	50	1794	66
1628	24	1681	38	1740	50	1795	66
1629	24	1682	38	1741	50	1796	66
1630	24	1683	38	1742	50	1797	66
1631	26	1684	38	1743	50	1798	66
1632	26	1685	38	1744	50	1799	66
1633	26	1686	38	1745	50	1800	66
1634	26	1687	38	1750	54	1801	66
1635	26	1688	38	1751	54	1802	66
1636	26	1689	40	1752	54	1803	66
1639	26	1690	40	1754	52	1804	66
1640	26	1691	40	1755	52	1805	66
1641	26	1692	40	1756	52	1806	66
1642	26	1693	40	1757	52	1807	68
1643	28	1694	40	1758	54	1808	68
1644	28	1695	44	1759	54	1809	68
1645	28	1696	14	1760	54	1810	68
1646	28	1697	44	1761	54	1811	68
1647	28	1698	44	1762	54	1812	70
1648	28	1699	44	1763	54	1813	70
1649	28	1700	44	1764	54	1814	70
1650	28	1701	44	1765	54	1815	70
1651	30	1704	26	1766	54	1816	70
1652	30	1715	46	1768	58	1817	68
1653	30	1716	46	1770	62	1818	68

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1820	76	1878	86	1938	112	1991	122
1821	76	1879	88	1940	114	1992	122
1822	76	1880	88	1941	114	1993	122
1824	72	1884	90	1942	114	1995	124
1825	72	1885	90	1943	114	1997	128
1826	74	1886	90	1945	114	1998	128
1827	74	1887	92	1946	114	1999	126
1828	74	1888	92	1947	114	2000	126
1829	74	1889	92	1948	114	2001	126
1830	74	1890	92	1949	114	2002	126
1831	74	1891	92	1951	112	2003	126
1832	74	1892	92	1952	112	2004	128
1833	74	1893	92	1957	116	2005	128
1838	78	1894	92	1958	116	2006	128
1839	78	1896	90	1959	116	2007	128
1841	76	1897	90	1961	116	2008	128
1842	76	1898	90	1962	116	2012	130
1843	76	1899	90	1964	114	2013	130
1849	84	1903	92	1965	114	2014	130
1850	84	1904	94	1966	114	2015	130
1851	84	1905	94	1967	116	2016	130
1852	84	1906	94	1968	116	2020	132
1853	84	1907	94	1970	88	2021	132
1854	84	1911	98	1971	116	2022	132
1855	84	1912	98	1972	116	2023	134
1856	84	1913	98	1973	118	2024	134
1857	84	1914	98	1974	118	2025	134
1858	84	1915	98	1975	118	2026	134
1863	88	1919	108	1976	118	2027	134
1864	88	1920	108	1977	118	2028	134
1865	88	1921	108	1978	118	2029	134
1867	88	1922	108	1979	118	2033	136
1868	88	1923	108	1980	118	2034	138
1869	88	1927	106	1984	120	2035	138
1871	88	1928	106	1985	120	2036	138
1872	90	1929	106	1986	120	2037	138
1873	90	1930	106	1987	120	2050	29
1874	90	1931	106	1988	120	2051	29
1876	86	1936	112	1989	120	2052	29
1877	86	1937	112	1990	120	2053	29

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2054	29	2148	56	4664	112	4734	100
2055	29	2150	64	4665	112	4735	104
2056	29	2450	43	4666	110	4736	102
2057	29	2451	43	4667	112	4737	100
2058	29	2452	43	4669	94	4738	100
2059	29	2453	43	4671	94	4739	102
2060	29	2454	43	4672	110	4740	102
2061	29	2455	43	4674	110	4741	102
2062	29	2456	43	4675	110	4742	102
2063	29	2457	43	4677	110	4743	104
2064	29	2458	43	4678	140	4745	100
2065	29	2459	43	4683	110	4746	100
2066	29	2460	43	4684	110	4748	100
2067	29	2461	43	4685	110	4749	102
2068	29	2462	43	4686	110	4750	104
2069	29	2463	43	4689	94	4751	104
2070	29	2464	43	4691	94	4752	104
2071	29	2465	43	4692	94	4754	70
2072	29	2466	43	4694	94	4755	70
2073	29	2467	43	4695	94	4756	70
2074	29	2468	43	4698	94	4760	68
2075	29	2469	43	4700	92	4761	68
2076	29	2470	14	4701	92	4762	70
2077	29	2472	24	4703	108	4765	100
2078	29	3000	43	4707	132	4766	100
2079	29	3001	43	4708	132	4770	98
2080	29	3002	43	4709	130	4771	98
2081	29	3003	43	4713	128	4772	98
2082	29	3004	43	4714	128	4773	100
2083	29	3005	43	4715	128	4782	98
2084	29	3006	43	4717	64	4788	74
2100	36	3007	43	4718	92	4790	74
2102	50	3008	43	4719	128	4791	72
2104	52	3009	43	4722	126	4793	74
2106	66	3010	43	4723	126	4795	72
2108	86	3011	43	4726	126	4798	72
2110	90	3012	43	4729	134	4799	72
2112	114	3013	43	4730	134	4803	72
2144	56	4662	110	4731	134	4805	72
2146	56	4663	112	4732	100	4813	72

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4815	72	4893	48	6222	118	6321	102
4829	96	4894	56	6224	120	6322	102
4830	96	4897	64	6225	120	6323	102
4831	96	4900	58	6226	48	6324	102
4834	96	4901	56	6228	116	6325	102
4835	96	4902	60	6229	116	6326	102
4836	96	4906	56	6231	122	6328	104
4838	96	4908	56	6232	122	6329	104
4839	96	4950	14	6233	48	6330	104
4842	62	4969	76	6234	122	6331	104
4844	62	4970	76	6235	122	6332	104
4845	62	4971	76	6236	122	6333	104
4846	62	4975	140	6237	122	6359	78
4847	60	4976	140	6238	122	6369	10
4848	62	4977	140	6239	48	6370	100
4849	58	4978	136	6250	48	6372	142
4850	62	4979	136	6251	48	6790	16
4853	74	4980	86	6263	50	6791	16
4854	60	4981	86	6264	50	6792	16
4855	60	4983	86	6265	50	6793	16
4856	60	4984	86	6267	64	6794	16
4859	58	4985	86	6272	46	6795	18
4861	60	4986	86	6273	46	6796	18
4862	60	4989	94	6277	46	6798	18
4863	48	4991	86	6279	96	6799	18
4864	48	5000	62	6280	58	6801	18
4865	48	6200	130	6292	58	6803	18
4867	62	6201	136	6293	58	6804	18
4868	48	6202	76	6294	58	6805	18
4869	62	6203	106	6296	124	6870	140
4870	62	6204	110	6300	56	6873	10
4874	60	6205	112	6308	58	6874	12
4875	60	6206	76	6310	60	6941	12
4878	98	6207	76	6311	58	6942	12
4884	56	6210	50	6312	58	6991	142
4885	58	6217	118	6315	122	6992	142
4886	56	6218	118	6316	122	6993	142
4890	74	6219	118	6318	120	6994	142
4891	58	6220	118	6319	120	6995	142
4892	48	6221	118	6320	102	7001	142

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
7002	142						
7003	142						
7004	142						
7005	142						
7021	44						
7022	44						
7023	44						
7024	44						
7025	18						
7026	18						
7027	20						
7028	20						
7029	18						
7030	20						
7345	46						
7572	14						
7577	14						
7580	16						
7629	142						
7630	142						

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Acceleration	46
Additional Part Marking	142
Additional Requirements	142
Aging	50
Altitude, Low Pressure	52
Aperture Cards Required	12
Applicable Documents	144
Base Document	10
City, State, Zip	10
Classification	14
Company Name/Command	10
Configuration	14
Contract Number/Office Symbol	10
Control, Source	10
Control, Specification	12
Design and Construction	16
Definition Of Hermetic Sealing	144
Dielectric Withstanding Voltage at Reduced Barometric Pressure	56
Dielectric Withstanding Voltage at Sea Level	60
Electromagnetic Interference	64
Finishes	16
Format	10
Frequency Stability	66
Fungus	68
Government Design Activity FSCM	10
Humidity	72
Illustrations	14
Impedance	76
Insulation Resistance	78
Materials	14
Metals	16
Moisture Resistance	82
Mounting Hardware	140

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Nomenclature	144
Noise	86
Notes	144
Operational Safety	90
Packaging	144
Part Marking	142
Part Number	12
Part Number Cross-Reference	144
Performance Characteristics	140
Phone Number	10
Quality Assurance Provisions	144
Requester's FSCM	10
Requester's Name	10
Resistance To Soldering Heat	92
Resistance To Solvents	96
Revision of AEDPS Document (Number)	12
Salt Spray	98
Scope	12
Seal	100
Shock, High Impact	104
Shock, Specified Pulse	108
Solderability	110
Source Table	12
Start To Steady State (Rise Time)	112
Stray Field	114
Street/Building	10
Superseded Document	144
System Application	10
Tabulated Characteristics	14
Temperature, High	116
Temperature, Low	120
Terminal Strength	122
Thermal Shock (Temperature Cycling)	126
Units of Measure	12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

Page

Vibration, High Frequency---------- 128
Vibration, Low Frequency---------- 132
Vibration, Random---------- 136

Workmanship---------- 140

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-94A(MI), dated 26 September 1986 does not include the foldout pages for the Specification Requirement Sheet (SRS). If you need a copy it must be ordered separately, please fax this page to 215-697-2247 and include your complete mailing address below.

_____

_____

_____

_____

_____

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.