DOD-STD-35-99A(MI)
9 February 1979
SUPERSEDING
MIL-STD-35-99(MI)
27 APRIL 1976

MILITARY STANDARD

CABLE ASSEMBLIES

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

FSC EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Cable Assemblies
Automated Engineering
Document Preparation System

DOD-STD-35-99A(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) ap-

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-99A(MI) is to provide instructions for the preparation of Specification Requirement Sheets (SRS) in order to produce Military Specification Exceptions for cable assemblies.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	4
	2.1	Issues of documents	4
	2.2	Other publications	5
	3.	DEFINITIONS	6
	4.	GENERAL REQUIREMENTS	7
	4.1	Introduction	7
	4.2	Specification Requirement Sheet (SRS)	7
	4.3	Configuration	7
	4.3.1	Dimensions	7
	4.3.2	Illustrations	7
	4.4	Units of measure	7
	5.	DETAILED REQUIREMENTS	9
	5.1	Introduction	9
	5.2	MSE Formats	9
	5.3	Referenced documents	9
	5.4	Tabulation	9
	5.5	Keyword Code Index (KCI) and Standard Paragraphs	11
	5.5.1	Interrelationship of Codes	11
	5.5.2	Automatic MSE Data	11
	5.5.3	DOD-STD-35 Tables	11

TABLES

Table	I.	Title Index	2
	II.	Tabulation candidates	10

APPENDICES

Appendix	A.	Tables	134
	B.	Illustrations	139
	C.	Characteristic Code Index	163
		Index	172

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for cable assemblies.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. It is recommended that MIL-STD-1353, Selection and Use of Electrical Connectors be reviewed prior to using this dash-numbered part book.

The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
CABLE ASSEMBLY, ELECTRICAL POWER	077001	J-C-175	APPLIANCES
		J-C-1270	EXTENSION CORD
		MIL-C-3885	COMMUNICATIONS
		MIL-C-7974	EXTERNAL POWER
		MIL-C-15987	PORTABLE EQUIPT
		MIL-C-24360	UMBILICAL
		MIL-C-28777	TEST EQUIPMENT
		MIL-C-45224	MISSILE SYSTEMS
		MIL-C-45820	SHOP AND FIELD
		MIL-C-45889	WARHEAD
		MIL-C-51385	INTERCONNECTION
		MIL-C-52286	POWER AND LIGHT
		MIL-C-55478	COMMUNICATION
		MIL-C-55481	COMMUNICATION
		MIL-C-62122	INTERVEHICLE
		AN3430	115/200V 3PHASE
		MS2548	G5E
		MS18053	125 VAC BP GRD
		MS21378	230/400 VAC AIR
		MS24208	115/200V 3PHASE
		MS25019	EXTERNAL 28 VDC
		MS27603	TEST EQUIPMENT
		MS51334	25-40 AMP
		MS90328	115/200 VAC
		MS90347	28 VDC
		MS90384	GSE
CABLE ASSEMBLY, COAXIAL	077003	MIL-C-45224	MISSILE
		MIL-C-55427	RADIO FREQUENCY
		MIL-C-55583	SHIELDED, TWIST PAIR
CABLE ASSEMBLY ELECTRICAL SPECIAL PURPOSE	077004	GG-C-0080	MEDICAL
		MIL-C-2642	MEDICAL, PIN JACKS

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
CABLE ASSEMBLY, ELECTRICAL SPECIAL PURPOSE	077004 (CONT)	MIL-C-14242	FUZE CONTROL
		MIL-C-14765	TEST EQUIPMENT
		MIL-C-21402	NON-MAGNETIC
		MIL-C-21479	COMPONENT TEST
		MIL-C-21549	LAUNCHER TUBES
		MIL-C-22192	HEADSET
		MIL-C-22442	EARPHONES
		MIL-C-25200	INTERCONNECTING
		MIL-C-45820	SHOP AND FIELD
		MIL-C-48501	WARHEAD
		MIL-C-48504	BRANCHED
		MIL-C-48518	SWITCH
		MIL-C-48521	INTERCONNECTION
		MIL-C-48526	INTERCONNECTION
		MIL-C-48539	INTERCONNECTION
		MIL-C-48545	WARHEAD
		MIL-C-48810	WARHEAD
		MIL-C-48815	INTERCONNECTION
		MIL-C-50288	DEMOLITION
		MIL-C-55479	TELEPHONE
		MIL-C-55486	TELEPHONE
		MIL-C-55497	TELEPHONE
		MIL-C-55583	COAXIAL
		MIL-C-60085	BRANCHED
		MIL-C-60906	PROJECTILE
		MIL-C-60908	PROJECTILE
		MIL-C-60920	SWITCH
		MIL-C-60921	TEST
		MIL-C-81452	HELICOPTER TO SONAR
		MIL-C-81863	INTERCONNECTION
		MIL-C-81864	INTERCONNECTION
		MIL-C-81865	INTERCONNECTION
		MIL-C-81866	INTERCONNECTION
		MIL-C-81867	CORD
		MIL-C-82001	INTERVEHICULAR
		MIL-C-82493	INTERCONNECTION
		MIL-C-82576	TORPEDO TEST
		MIL-C-82514	TORPEDO CONTROL
		MIL-C-83506	MOLDED CONNECTR

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bid or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATION

MILITARY

MIL-C-17	Cable, Radio Frequency, Flexible and Semirigid, General Specification For
MIL-C-7974	Cable Assemblies and Attachable Plugs, External Electrical Power, Aircraft
MIL-C-24360	Cable Assembly, Aircraft Autonavigator Alignment, Umbilical
MIL-C-39012	Connector, Coaxial, Radio Frequency, General Specification For
MIL-C-55583	Cable Assembly, Special Purpose Electrical CX11230()IG and Cable Assembly Adapter DX10734()IG
MIL-C-60906	Cable Assembly, Special Purpose, Electrical, T4179A

STANDARDS

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-454	Standard General Requirements for Electronic Equipment
MIL-STD-810	Environmental Test Methods
MIL-STD-1285	Marking of Electric and Electronic Parts

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

MIL-STD-1344	Test Methods for Electrical Connectors
MIL-STD-1523	Age Control of Age-Sensitive Elastomeric Materials

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publication. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTMD1868	Standard Method for Detection and Measurement of Corona Pulses in Evaluation of Insulation
ASTME380	Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Cable Assemblies.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for cable assemblies, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to cable assemblies.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to cable assemblies.

4.3.2 Illustrations. Illustrations applicable to cable assemblies are contained in Appendix B to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table II provides codes for column headings which may be used for cable assemblies characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE II. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1564	STYLE	1566	CLASS	1568	SERIES
1570	GRADE	1572	KIND	1574	TYPE
1576	SIZE	1579	CABLE TYPE	1580	CONDUCTORS QUANTITY
1582	CONDUCTOR AWG	1583	CONDUCTOR DIA MM	1602	CONN A P/N
1610	CONN A BACKSHELL PART NO.	1616	CONN B P/N	1624	CONN B BACKSHELL PART NO.
1672	ASSEMBLY VOLTS AC RATING	1674	ASSEMBLY VOLTS DC/ RMS RATING	1676	ASSEMBLY VOLTS DC RATING

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.5 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix C, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.5.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.5.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.5.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT	0700
ONE SECTION DOCUMENT	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6874	THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).
0107	
0108	0108. SCOPE. SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.
	PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.
	PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.
6941	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.
6942	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ALTITUDE RATING	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5060
SEA LEVEL TO (METERS)	5061
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5062
SEA LEVEL TO (METERS)	5063
TEMPERATURE RATING	
MAXIMUM OPERATING (DEGREES CELSIUS)	5069
MAXIMUM STORAGE (DEGREES CELSIUS)	7302
MAXIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5054
MINIMUM OPERATING (DEGREES CELSIUS)	5068
MINIMUM STORAGE (DEGREES CELSIUS)	7301
MINIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5052

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ALTITUDE RATING.
5060	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5060 FEET.
5061	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5061 METERS.
5062	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5062 FEET.
5063	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5063 METERS.
	TEMPERATURE RATING.
5069	THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS.
7302	THE MAXIMUM STORAGE TEMPERATURE RATING SHALL BE 7302 DEGREES CELSIUS.
5054	THE MAXIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5054 DEGREES CELSIUS.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.
7301	THE MINIMUM STORAGE TEMPERATURE RATING SHALL BE 7301 DEGREES CELSIUS.
5052	THE MINIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5052 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION	
IN ACCORDANCE WITH THE BASE DOCUMENT	
STYLE (DESIGNATION)	1564
CLASS (DESIGNATION)	1566
SERIES (DESIGNATION)	1568
GRADE (DESIGNATION)	1570
KIND (DESIGNATION)	1572
TYPE (DESIGNATION)	1574
SIZE (DESIGNATION)	1576
RATINGS	
VOLTAGE (SELECT ONE)	
(VOLTS DC)	1676
(VOLTS AC)	1672
(VOLTS DC OR RMS)	1674
FREQUENCY (SELECT ONE)	
(HERTZ)	1678
(KILOHERTZ)	1680
(MEGAHERTZ)	1682
(GIGAHERTZ)	1683

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CLASSIFICATION.
1564	STYLE 1564 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1566	CLASS 1566 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1568	SERIES 1568 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1570	GRADE 1570 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1572	KIND 1572 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1574	TYPE 1574 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1576	SIZE 1576 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
	RATINGS.
1676	THE ASSEMBLY SHALL BE RATED FOR 1676 VOLTS DC.
1672	THE ASSEMBLY SHALL BE RATED FOR 1672 VOLTS AC.
1674	THE ASSEMBLY SHALL BE RATED FOR 1674 VOLTS DC OR RMS.
1678	THE ASSEMBLY SHALL BE RATED FOR 1678 HERTZ.
1680	THE ASSEMBLY SHALL BE RATED FOR 1680 KILOHERTZ.
1682	THE ASSEMBLY SHALL BE RATED FOR 1682 MEGAHERTZ.
1683	THE ASSMEBLY SHALL BE RATED FOR 1683 GIGAHERTZ.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RATINGS (CONT)	
CURRENT	
(AMPERES)	1688
PHASE (SELECT ONE)	
SINGLE.	1684
THREE PHASE.	1686
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX B	1009
*UNITS (SELECT ONE)	
U.S. (SELECT ONE)	
INCHES.	7572
FEET.	7573
YARDS.	7574
SI (SELECT ONE)	
CENTIMETERS.	7576
MILLIMETERS.	7577
METERS.	7578

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1688	THE ASSEMBLY SHALL BE RATED FOR 1688 AMPERE(S).
1684	THE ASSEMBLY SHALL BE FOR SINGLE-PHASE POWER.
1686	THE ASSEMBLY SHALL BE FOR THREE-PHASE POWER.
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7573	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN FEET OR DEGREES.
7574	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN YARDS OR DEGREES.
7576	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN CENTIMETERS OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
7578	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN METERS OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX B	4950
NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.	
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	
MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE IX IS USED.	
METALS	
DISSIMILAR METALS.	7580

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.
	MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
	FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
7580	METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION	
CABLE STOCK REQUIREMENTS	
DOCUMENT (DOC DES)	1578
(TYPE)	1579
SHIELD	
REQUIRED.	1581
WIRE SIZE (AWG)	1584
MINIMUM COVERAGE (PERCENT)	1586
BRAID ANGLE (DEGREES)	1588
ENDS PER CARRIER (NUMBER)	1591
JACKET	
REQUIRED.	1593
INTERCONNECTION	
PER WIRING TABLE.	1594
NOTE: SEE APPENDIX A TABLE III.	
CONDUCTOR COLORS AND INTERFACE CONNECTIONS	
PER CONDUCTOR COLORS AND INTERFACE CONNECTIONS TABLE	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	DESIGN AND CONSTRUCTION.
	CABLE STOCK REQUIREMENTS.
1578	THE CABLE SHALL CONFORM TO THE REQUIREMENTS OF 1578.
1579	THE CABLE SHALL BE TYPE 1579.
1581	SHIELD. THE CABLE SHALL BE SHIELDED.
1584	SHIELD WIRE SHALL BE 1584 AWG.
1586	SHIELD COVERAGE SHALL BE NOT LESS THAN 1586 PERCENT.
1588	THE BRAID ANGLE SHALL BE 1588 DEGREES.
1591	THERE SHALL BE 1591 ENDS PER CARRIER.
1593	JACKET. THE CABLE SHALL CONTAIN AN OVERALL JACKET.
1594	INTERCONNECTION. INTERCONNECTIONS (WIRING) SHALL BE IN ACCORDANCE WITH THE WIRING TABLE.

CONDUCTOR COLORS AND INTERFACE CONNECTIONS. CONDUCTOR COLORS AND CABLE ASSEMBLY INTERFACE CONNECTIONS SHALL BE IN ACCORDANCE WITH THE FOLLOWING TABLE:

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
PER CONDUCTOR COLORS AND INTERFACE CONNECTIONS TABLE (CONT)	
TERMINAL LUG REQUIREMENTS	
PER TERMINAL LUG REQUIREMENTS TABLE	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

CONDUCTOR COLORS AND INTERFACE CONNECTIONS TABLE

END A CONNECTION	CONDUCTOR COLOR	END B CONNECTION
3800	3801	3802
3803	3804	3805
3806	3807	3808
3809	3810	3811
3812	3813	3814
3815	3816	3817
3818	3819	3820
3821	3822	3823
3824	3825	3826
3827	3828	3829

TERMINAL LUG REQUIREMENTS. REQUIREMENTS FOR CABLE ASSEMBLIES WITH TERMINAL LUGS SHALL BE IN ACCORDANCE WITH THE FOLLOWING TABLE:

TERMINAL LUG REQUIREMENTS TABLE

TERMINAL LUG(S)			WIRE SIZE		CORRES
TYPE	SPECIFICATION	WIRE COLOR	AWG	MILLI-METER	CONNECTOR TERMINAL
3850	3851	3852	3853	3854	3855
3856	3857	3858	3859	3860	3861
3862	3863	3864	3865	3866	3867
3868	3869	3870	3871	3872	3873
3874	3875	3876	3877	3878	3879
3880	3881	3882	3883	3884	3885
3886	3887	3888	3889	3890	3891
3892	3893	3894	3895	3896	3897
3898	3899	3900	3901	3902	3903
3904	3905	3906	3907	3908	3909

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
CABLE ACCESSORIES	
BRANCH TRANSITION (PART NUMBER)	1810
PER DOCUMENT (DOC DES)	1812
ASSEMBLY SHALL INCLUDE ____	1814
PER DOCUMENT (DOC DES)	1816
GROUNDING FERRULES	
INNER FERRULE (PART NUMBER)	1640
PER DOCUMENT (DOC DES)	1641
VENDOR (FSCM)	1642
OUTER FERRULE (PART NUMBER)	1643
PER DOCUMENT (DOC DES)	1644
VENDOR (FSCM)	1645
SHIELD TERMINATION SHALL BE ____	1646
COVERS	
(PART NUMBER(S))	1648
PER DOCUMENT (DOC DES)	1650
COVER ATTACHMENT MEANS ____	1651

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CABLE ACCESSORIES.
1810	CABLE ASSEMBLY SHALL INCLUDE A TRANSITION, PART NUMBER 1810, FOR CABLE BRANCHING.
1812	DOCUMENT 1812 SHALL APPLY FOR THE TRANSITION.
1814	CABLE ASSEMBLY SHALL INCLUDE 1814.
1816	DOCUMENT 1816 SHALL APPLY.
	GROUNDING FERRULES.
1640	PART NUMBER 1640 SHALL APPLY TO THE INNER FERRULE.
1641	THE INNER FERRULE SHALL BE IN ACCORDANCE WITH 1641.
1642	VENDOR FSCM NUMBER 1642 SHALL APPLY FOR THE INNER FERRULE.
1643	PART NUMBER 1643 SHALL APPLY TO THE OUTER FERRULE.
1644	THE OUTER FERRULE SHALL BE IN ACCORDANCE WITH 1644.
1645	VENDOR FSCM NUMBER 1645 SHALL APPLY FOR THE OUTER FERRULE.
1646	SHIELD TERMINATION SHALL BE 1646.
	COVERS.
1648	PART NUMBER(S) 1648 SHALL APPLY FOR CONNECTOR PROTECTIVE COVER(S).
1650	COVER(S) SHALL BE IN ACCORDANCE WITH 1650.
1651	COVER(S) SHALL BE ATTACHED TO THE ASSEMBLY BY MEANS OF 1651.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
SOLDERING	
PER REQUIREMENT 5 OF MIL-STD-454.	1690
PER DOCUMENT (DOC DES)	1692
SOLDER SHALL BE ____	1693
BANDING	
MINIMUM TAPE THICKNESS UNDER BAND (SELECT ONE)	
(INCH)	1630
(MILLIMETERS)	1632
MINIMUM BANDWIDTH (SELECT ONE)	
(INCHES)	1634
(MILLIMETERS)	1636
LACING TWINE	
(PART NUMBER)	1694
DOCUMENT (DOC DES)	1695

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	SOLDERING.
1690	SOLDERING SHALL BE IN ACCORDANCE WITH REQUIREMENT 5 OF MIL-STD-454.
1692	SOLDERING SHALL BE IN ACCORDANCE WITH 1692.
1693	SOLDER SHALL BE 1693.
	BANDING.
1630	TAPE THICKNESS UNDER THE BAND SHALL BE NOT LESS THAN 1630 INCH.
1632	TAPE THICKNESS UNDER THE BAND SHALL BE NOT LESS THAN 1632 MILLIMETER(S).
1634	THE BAND WIDTH SHALL BE NOT LESS THAN 1634 INCH(S).
1636	THE BAND WIDTH SHALL BE NOT LESS THAN 1636 MILLIMETER(S).
1694	CABLE SHALL BE TIED WITH LACING TWINE, PART NUMBER 1694.
1695	LACING TWINE SHALL BE IN ACCORDANCE WITH 1695.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
ALTITUDE	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	6790
SEA LEVEL TO (METERS)	6791
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	6792
SEA LEVEL TO (METERS)	6793
TEMPERATURE	
MAXIMUM OPERATING (DEGREES CELSIUS)	6794
MAXIMUM STORAGE (DEGREES CELSIUS)	6796
MAXIMUM AMBIENT OPERATING (DEGREES CELSIUS)	6798
MINIMUM OPERATING (DEGREES CELSIUS)	6799
MINIMUM STORAGE (DEGREES CELSIUS)	6801
MINIMUM AMBIENT OPERATING (DEGREES CELSIUS)	6803

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6790 OPERATING ALTITUDE. THE OPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6790 FEET.

6791 OPERATING ALTITUDE. THE OPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6791 METERS.

6792 NONOPERATING ALTITUDE. THE NONOPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6792 FEET.

6793 NONOPERATING ALTITUDE. THE NONOPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6793 METERS.

6794 MAXIMUM OPERATING TEMPERATURE. THE OPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6794 DEGREES CELSIUS.

6796 MAXIMUM STORAGE TEMPERATURE. THE STORAGE TEMPERATURE SHALL BE NOT GREATER THAN 6796 DEGREES CELSIUS.

6798 MAXIMUM AMBIENT OPERATING TEMPERATURE. THE AMBIENT OPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6798 DEGREES CELSIUS.

6799 MINIMUM OPERATING TEMPERATURE. THE OPERATING TEMPERATURE SHALL BE NOT LESS THAN 6799 DEGREES CELSIUS.

6801 MINIMUM STORAGE TEMPERATURE. THE STORAGE TEMPERATURE SHALL BE NOT LESS THAN 6801 DEGREES CELSIUS.

6803 MINIMUM AMBIENT OPERATING TEMPERATURE. THE AMBIENT OPERATING TEMPERATURE SHALL BE NOT LESS THAN 6803 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
WEIGHT	
MAXIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024
CONDUCTORS	
TOTAL (QUANTITY)	1580
FIRST OR ONLY CONDUCTOR DETAILS	
WIRE SIZE (SELECT ONE)	
(AWG)	1582
DIAMETER (MILLIMETERS)	1583
CONDUCTORS THIS SIZE (QUANTITY)	1585
MINIMUM STRANDS PER CONDUCTOR (QUANTITY)	1587

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

7022 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).

7023 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).

7021 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).

7024 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).

1580 CONDUCTORS. THE CABLE ASSEMBLY SHALL HAVE A TOTAL OF 1580 CONDUCTOR(S).

1582 THE WIRE(S) SIZE SHALL BE NUMBER 1582 AWG.

1583 THE WIRE(S) SHALL BE 1583 MILLIMETER(S) IN DIAMETER.

1585 THERE SHALL BE 1585 CONDUCTORS OF THE REFERENCED WIRE SIZE.

1587 THERE SHALL BE NOT LESS THAN 1587 STRANDS PER CONDUCTOR.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONDUCTORS (CONT)	
SECOND CONDUCTOR DETAILS	
WIRE SIZE (SELECT ONE)	
(AWG)	1589
DIAMETER (MILLIMETERS)	1590
CONDUCTORS THIS SIZE (QUANTITY)	1592
MINIMUM STRANDS PER CONDUCTOR (QUANTITY)	1597
THIRD CONDUCTOR DETAILS	
WIRE SIZE (SELECT ONE)	
(AWG)	1595
DIAMETER (MILLIMETERS)	1596
CONDUCTORS THIS SIZE (QUANTITY)	1598
MINIMUM STRANDS PER CONDUCTOR (QUANTITY)	1599

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1589	THE SECOND WIRE SIZE SHALL BE NUMBER 1589 AWG.
1590	THE SECOND WIRE SIZE SHALL BE 1590 MILLIMETER(S) IN DIAMETER.
1592	THERE SHALL BE 1592 CONDUCTOR(S) OF THE SECOND REFERENCED WIRE SIZE.
1597	THERE SHALL BE NOT LESS THAN 1597 STRANDS PER CONDUCTOR FOR THE SECOND WIRE SIZE.
1595	THE THIRD WIRE SIZE SHALL BE NUMBER 1595 AWG.
1596	THE THIRD WIRE SIZE SHALL BE 1596 MILLIMETER(S) IN DIAMETER.
1598	THERE SHALL BE 1598 CONDUCTOR(S) OF THE THIRD REFERENCED WIRE SIZE.
1599	THERE SHALL BE NOT LESS THAN 1599 STRANDS PER CONDUCTOR FOR THE THIRD WIRE SIZE.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONNECTOR REQUIREMENTS	
CONNECTOR A (FIRST) DETAILS	
(TYPE)	1602
PER DOCUMENT (DOC DES)	1604
FIGURE IN DESIGNATED DOCUMENT (DESIGNATION)	1605
ILLUSTRATION (SEE APPENDIX B)	1607
VENDOR (FSCM)	1609
BACKSHELL TYPE (DESIGNATION)	1610
PER DOCUMENT (DOC DES)	1612
VENDOR (FSCM)	1614
POTTED TERMINATION.	1696
MOLDED TERMINATION.	1697
CONNECTOR B (SECOND) DETAILS	
(TYPE)	1616
PER DOCUMENT (DOC DES)	1618
FIGURE IN DESIGNATED DOCUMENT (DESIGNATION)	1619

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CONNECTOR REQUIREMENTS.
1602	CONNECTOR A (FIRST CONNECTOR) SHALL BE TYPE 1602.
1604	THE CONNECTOR SHALL BE IN ACCORDANCE WITH 1604.
1605	THE CONNECTOR SHALL BE IN ACCORDANCE WITH FIGURE NUMBER 1605 OF THE DOCUMENT REFERENCED ABOVE.
1607	THE CONNECTOR SHALL BE IN ACCORDANCE WITH ILLUSTRATION 1607.
1609	VENDOR FSCM NUMBER 1609 SHALL APPLY FOR THE CONNECTOR.
1610	THE BACKSHELL ACCESSORY FOR THE CONNECTOR SHALL BE TYPE 1610.
1612	THE BACKSHELL ACCESSORY SHALL BE IN ACCORDANCE WITH 1612.
1614	VENDOR FSCM NUMBER 1614 SHALL APPLY FOR THE BACKSHELL ACCESSORY.
1696	TERMINATION SHALL BE POTTED TO THE CABLE.
1697	TERMINATION SHALL BE MOLDED TO THE CABLE.
1616	CONNECTOR B (SECOND CONNECTOR) SHALL BE TYPE 1616.
1618	THE SECOND CONNECTOR SHALL BE IN ACCORDANCE WITH 1618.
1619	THE CONNECTOR SHALL BE IN ACCORDANCE WITH FIGURE NUMBER 1619 OF THE DOCUMENT REFERENCED ABOVE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONNECTOR REQUIREMENTS (CONT)	
CONNECTOR B (SECOND) DETAILS (CONT)	
ILLUSTRATION (SEE APPENDIX B)	1620
VENDOR (FSCM)	1622
BACKSHELL TYPE (DESIGNATION)	1624
PER DOCUMENT (DOC DES)	1626
VENDOR (FSCM)	1628
POTTED TERMINATION.	1698
MOLDED TERMINATION.	1699
CONNECTOR DETAILS PER CABLE ASSEMBLY CONNECTOR TABLE	
NOTE: SEE APPENDIX A, TABLE IV	1700
ALTITUDE IMMERSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3048
NO EVIDENCE OF DIELECTRIC BREAKDOWN.	3049
MAXIMUM LEAKAGE CURRENT (MILLIAMPERES)	3010

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1620	THE SECOND CONNECTOR SHALL BE IN ACCORDANCE WITH ILLUSTRATION 1620.
1622	VENDOR FSCM NUMBER 1622 SHALL APPLY FOR THE CONNECTOR.
1624	THE BACKSHELL ACCESSORY FOR THE SECOND CONNECTOR SHALL BE TYPE 1624.
1626	THE BACKSHELL ACCESSORY SHALL BE IN ACCORDANCE WITH 1626.
1628	VENDOR FSCM NUMBER 1628 SHALL APPLY FOR THE BACKSHELL ACCESSORY.
1698	TERMINATION SHALL BE POTTED TO THE CABLE.
1699	TERMINATION SHALL BE MOLDED TO THE CABLE.
1700	CONNECTOR REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE CABLE ASSEMBLY CONNECTOR TABLE.
3048	ALTITUDE IMMERSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3048.
3049	ALTITUDE IMMERSION. THERE SHALL BE NO EVIDENCE OF DIELECTRIC BREAKDOWN.
3010	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 3010 MILLIAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ALTITUDE IMMERSION (CONT)	
NO EVIDENCE OF DIELECTRIC BREAKDOWN. (CONT)	
NO EVIDENCE OF SEAL DETERIORATION OR LEAKAGE.	3013
MINIMUM INSULATION RESISTANCE WHILE IMMERSED (MEGOHMS)	3015
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3029
PER MIL-STD-1344, METHOD 1004.	3031
MINIMUM DIELECTRIC WITHSTANDING VOLTAGE (VOLTS RMS)	3044
DURATION (SECONDS)	3033
ATTENUATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1992
AS FOLLOWS: (SELECT ONE)	1993
INCH-POUND, PER 100 FEET	
(DECIBELS)	1994
*FREQUENCY (KILOHERTZ)	1995
(DECIBELS)	2584
*FREQUENCY (MEGAHERTZ)	2586

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3013	THE CONNECTOR SHALL SHOW NO EVIDENCE OF MOISTURE SEAL DETERIORATION OR LEAKAGE.
3015	THE INSULATION RESISTANCE WHILE IN THE SALT SOLUTION SHALL BE NOT LESS THAN 3015 MEGOHMS.
3029	ALTITUDE IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3029.
3031	ALTITUDE IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1004 OF MIL-STD-1344.
3044	THE DIELECTRIC WITHSTANDING VOLTAGE SHALL BE NOT LESS THAN 3044 VOLTS RMS.
3033	THE DURATION OF DIELECTRIC WITHSTANDING VOLTAGE APPLICATION SHALL BE NOT LESS THAN 3033 SECONDS.
1992	ATTENUATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1992.
1993	ATTENUATION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1994 1995	THE ATTENUATION PER 100 FEET SHALL BE NOT GREATER THAN 1994 DECIBEL(S) AT A TEST FREQUENCY OF 1995 KILOHERTZ.
2584 2586	THE ATTENUATION PER 100 FEET SHALL BE NOT GREATER THAN 2584 DECIBEL(S) AT A TEST FREQUENCY OF 2586 MEGAHERTZ.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ATTENUATION (CONT)	
INCH-POUND (CONT)	
(DECIBELS) *FREQUENCY (GIGAHERTZ)	2587 2588
(DECIBELS) *SECOND FREQUENCY (KILOHERTZ)	1998 1999
(DECIBELS) *SECOND FREQUENCY (MEGAHERTZ)	1950 1952
(DECIBELS) *SECOND FREQUENCY (GIGAHERTZ)	1954 1956
SI PER 100 METERS	
(DECIBELS) *FREQUENCY (KILOHERTZ)	1958 1960
(DECIBELS) *FREQUENCY (MEGAHERTZ)	1962 1964
(DECIBELS) *FREQUENCY (GIGAHERTZ)	1966 1968
(DECIBELS) *SECOND FREQUENCY (KILOHERTZ)	1970 1972
(DECIBELS) *SECOND FREQUENCY (MEGAHERTZ)	1974 1976
(DECIBELS) *SECOND FREQUENCY (GIGAHERTZ)	1978 1979

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2587 2588	THE ATTENUATION PER 100 FEET SHALL BE NOT GREATER THAN 2587 DECIBEL(S) AT A TEST FREQUENCY OF 2588 GIGAHERTZ.
1998 1999	THE ATTENUATION PER 100 FEET SHALL BE NOT GREATER THAN 1998 DECIBEL(S) AT A SECOND TEST FREQUENCY OF 1999 KILOHERTZ.
1950 1952	THE ATTENUATION PER 100 FEET SHALL BE NOT GREATER THAN 1950 DECIBEL(S) AT A SECOND TEST FREQUENCY OF 1952 MEGAHERTZ.
1954 1956	THE ATTENUATION PER 100 FEET SHALL BE NOT GREATER THAN 1954 DECIBEL(S) AT A SECOND TEST FREQUENCY OF 1956 GIGAHERTZ.
1958 1960	THE ATTENUATION PER 100 METERS SHALL BE NOT GREATER THAN 1958 DECIBEL(S) AT A TEST FREQUENCY OF 1960 KILOHERTZ.
1962 1964	THE ATTENUATION PER 100 METERS SHALL BE NOT GREATER THAN 1962 DECIBEL(S) AT A TEST FREQUENCY OF 1964 MEGAHERTZ.
1966 1968	THE ATTENUATION PER 100 METERS SHALL BE NOT GREATER THAN 1966 DECIBEL(S) AT A TEST FREQUENCY OF 1968 GIGAHERTZ.
1970 1972	THE ATTENUATION PER 100 METERS SHALL BE NOT GREATER THAN 1970 DECIBEL(S) AT A SECOND TEST FREQUENCY OF 1972 KILOHERTZ.
1974 1976	THE ATTENUATION PER 100 METERS SHALL BE NOT GREATER THAN 1974 DECIBEL(S) AT A SECOND TEST FREQUENCY OF 1976 MEGAHERTZ.
1978 1979	THE ATTENUATION PER 100 METERS SHALL BE NOT GREATER THAN 1978 DECIBEL(S) AT A SECOND TEST FREQUENCY OF 1979 GIGAHERTZ.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ATTENUATION (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1982
PER MIL-C-17.	1984
BAND TENSILE STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2022
NO TEARING OF BANDS.	2024
MAXIMUM BANDSHIFT (SELECT ONE)	
(INCH)	2026
(MILLIMETERS)	2027
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2002
PER MIL-C-7974.	2004
CHAMBER TEMPERATURE (DEGREES CELSIUS)	2006
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2007

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1982	ATTENUATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1982.
1984	ATTENUATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-17.
2022	BAND TENSILE STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2022.
2024	BAND TENSILE STRENGTH. THERE SHALL BE NO TEARING OF THE BANDS.
2026	THE BAND SHIFT SHALL BE NOT GREATER THAN 2026 INCH.
2027	THE BAND SHIFT SHALL BE NOT GREATER THAN 2027 MILLIMETER(S).
2002	BAND TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2002.
2004	BAND TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-7974.
2006	THE CHAMBER TEMPERATURE SHALL BE 2006 DEGREES CELSIUS.
2007	THE TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2007 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
BAND TENSILE STRENGTH (CONT)	
PER MIL-C-7974 (CONT)	
CONDITIONING DURATION (HOURS)	2009
TOLERANCE (HOURS)	2010
APPLIED FORCE (SELECT ONE)	
(POUNDS)	2011
TOLERANCE (POUNDS)	2015
(NEWTONS)	2013
TOLERANCE (NEWTONS)	2016
CABLE PULL-OUT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2062
NO EVIDENCE OF PHYSICAL DAMAGE.	2063
NO DISCONTINUITY.	2064
MAXIMUM LINEAR MOTION (SELECT ONE)	
(INCHES)	2065
(MILLIMETERS)	2067

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2009	THE CHAMBER CONDITIONING DURATION SHALL BE 2009 HOUR(S).
2010	THE CONDITION DURATION TOLERANCE SHALL BE PLUS OR MINUS 2010 HOUR(S).
2011	A TEST FORCE OF 2011 POUND(S) SHALL BE APPLIED.
2015	THE TEST FORCE TOLERANCE SHALL BE PLUS OR MINUS 2015 POUND(S).
2013	A TEST FORCE OF 2013 NEWTON(S) SHALL BE APPLIED.
2016	THE TEST FORCE TOLERANCE SHALL BE PLUS OR MINUS 2016 NEWTON(S).
2062	CABLE PULL-OUT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2062.
2063	CABLE PULL-OUT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2064	THERE SHALL BE NO DISCONTINUITY.
2065	THE LINEAR MOTION OF THE CABLE WITH RESPECT TO THE CLAMP SHALL BE NOT GREATER THAN 2065 INCH(S).
2067	THE LINEAR MOTION OF THE CABLE WITH RESPECT TO THE CLAMP SHALL BE NOT GREATER THAN 2067 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CABLE PULL-OUT (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2042
PER MIL-STD-1344, METHOD 2009.	2044
*TEST CONDITION (LETTER)	2045
CABLE SEAL FLEXING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2412
NO EVIDENCE OF SEAL DAMAGE.	2414
NO EVIDENCE OF DIELECTRIC BREAKDOWN.	2421
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2419
NO SHORTING.	2415
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY.	2417
MAXIMUM (MICROSECONDS)	2302

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2042	CABLE PULL-OUT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2042.
2044	CABLE PULL-OUT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2009 OF MIL-STD-1344.
2045	TEST CONDITION LETTER 2045 SHALL APPLY.
2412	CABLE SEAL FLEXING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2412.
2414	CABLE SEAL FLEXING. THERE SHALL BE NO EVIDENCE OF DAMAGE WHICH COULD ALLOW UNDESIRED SUBSTANCES TO ENTER THE INSULATION AND TO CAUSE DETERIORATION OF ELECTRICAL PERFORMANCE.
2421	THERE SHALL BE NO EVIDENCE OF DIELECTRIC BREAKDOWN.
2419	THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 2419 MEGOHM(S).
2415	THERE SHALL BE NO EVIDENCE OF SHORTING BETWEEN CONDUCTORS.
2417	THERE SHALL BE NO EVIDENCE OF DISCONTINUITY.
2302	DISCONTINUITY SHALL BE NOT GREATER THAN 2302 MICROSECOND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CABLE SEAL FLEXING (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2402
PER MIL-STD-1344, METHOD 2017.	2404
PROCEDURE I.	2305
MINIMUM ROLLER DIAMETER (SELECT ONE)	
(INCHES)	2306
(MILLIMETERS)	2307
MINIMUM DIMENSION X (SELECT ONE)	
(INCHES)	2308
(MILLIMETERS)	2309
PROCEDURE II.	2322
METHOD (NUMBER)	2324
MINIMUM TENSION (SELECT ONE)	
(POUNDS/INCH-CABLE-WIDTH)	2326
(KILOGRAMS/MILLIMETER-CABLE-WIDTH)	2328

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2402	CABLE SEAL FLEXING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2402.
2404	CABLE SEAL FLEXING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2017 OF MIL-STD-1344.
2305	TEST PROCEDURE I SHALL APPLY.
2306	THE ROLLER DIAMETER SHALL BE NOT LESS THAN 2306 INCH(S).
2307	THE ROLLER DIAMETER SHALL BE NOT LESS THAN 2307 MILLIMETER(S).
2308	DIMENSION X BETWEEN THE NEAREST END OF INTERNAL CABLE CLAMP AND ROLLER CENTERLINE SHALL BE NOT LESS THAN 2308 INCH(S).
2309	DIMENSION X BETWEEN THE NEAREST END OF INTERNAL CABLE CLAMP AND ROLLER CENTERLINE SHALL BE NOT LESS THAN 2309 MILLIMETER(S).
2322	TEST PROCEDURE II SHALL APPLY.
2324	METHOD NUMBER 2324 SHALL BE USED.
2326	CABLE TENSION SHALL BE NOT LESS THAN 2326 POUNDS PER INCH-OF-CABLE-WIDTH.
2328	CABLE TENSION SHALL BE NOT LESS THAN 2328 KILOGRAMS PER MILLIMETER-OF-CABLE-WIDTH.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CABLE SEAL FLEXING (CONT)	
PROCEDURE II.(CONT)	
MAXIMUM TENSION (SELECT ONE)	
(POUNDS/INCH-CABLE-WIDTH)	2330
(KILOGRAMS/MILLIMETER-CABLE-WIDTH)	2332
CYCLE RATE (CYCLES/MINUTE)	2407
NUMBER OF CYCLES (QUANTITY)	2405
CIRCUIT RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2092
MAXIMUM RESISTANCE (OHMS)	2094
PER RESISTANCE BETWEEN TEST POINTS TABLE.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2330	CABLE TENSION SHALL BE NOT GREATER THAN 2330 POUNDS PER INCH-OF-CABLE-WIDTH.
2332	CABLE TENSION SHALL BE NOT GREATER THAN 2332 KILOGRAMS PER MILLIMETER-OF-CABLE-WIDTH.
2407	CYCLING RATE SHALL BE APPROXIMATELY 2407 CYCLES PER MINUTE.
2405	THERE SHALL BE 2405 CYCLES PERFORMED.
2092	CIRCUIT RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2092.
2094	CIRCUIT RESISTANCE. THE CIRCUIT RESISTANCE SHALL BE NOT GREATER THAN 2094 OHM(S).
	CIRCUIT RESISTANCE. THE CIRCUIT RESISTANCE REQUIREMENTS SHALL BE IN ACCORDANCE WITH THE REQUIREMENTS SPECIFIED IN THE RESISTANCE BETWEEN TEST POINTS TABLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CIRCUIT RESISTANCE (CONT)	
PER RESISTANCE BETWEEN TEST POINTS TABLE. (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2072
PER MIL-STD-202, METHOD 303.	2074
MAXIMUM TEST VOLTAGE (VOLTS DC)	2076
MAXIMUM TEST CURRENT (MILLIAMPERES)	2078
MAXIMUM MEASUREMENT ERROR (PERCENT)	2080
MAXIMUM VOLTAGE APPLICATION PER CIRCUIT (SECONDS)	2082
TEST TEMPERATURE (DEGREES CELSIUS)	2084

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

RESISTANCE BETWEEN TEST POINTS TABLE

CIRCUIT PATH		MAXIMUM
FROM	TO	RESISTANCE (OHM)
3950	3951	3952
3953	3954	3955
3956	3957	3958
3959	3960	3961
3962	3963	3964
3965	3966	3967
3968	3969	3970
3971	3972	3973
3974	3975	3976
3977	3978	3979
3980	3981	3982
3983	3984	3985
3986	3987	3988
3989	3990	3991
3992	3993	3994

2072 CIRCUIT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2072.

2074 CIRCUIT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 303 OF MIL-STD-202.

2076 THE TEST VOLTAGE SHALL BE NOT GREATER THAN 2076 VOLT(S) DC.

2078 THE TEST CURRENT SHALL BE NOT GREATER THAN 2078 MILLIAMPERES.

2080 THE MEASUREMENT ERROR SHALL BE NOT GREATER THAN 2080 PERCENT.

2082 THE TEST VOLTAGE SHALL BE APPLIED NOT MORE THAN 2082 SECOND(S) PER CIRCUIT.

2084 THE TEST TEMPERATURE SHALL BE 2084 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
COLD BEND	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2142
NO EVIDENCE OF PHYSICAL DAMAGE.	2144
NO LOSS OF CONTINUITY.	2146
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2148
NO DIELECTRIC BREAKDOWN.	2150
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2102
AS FOLLOWS:	2104
TEST TEMPERATURE (- DEGREES CELSIUS)	2106
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2108
CONDITIONING DURATION (HOURS)	2110
BEND ARC (DEGREES)	2112
BENDS (QUANTITY)	2114

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2142	COLD BEND. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2142.
2144	COLD BEND. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2146	THERE SHALL BE NO LOSS OF CONTINUITY DURING BENDING OF THE CABLE ASSEMBLY.
2148	THE INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 2148 MEGOHM(S).
2150	THERE SHALL BE NO EVIDENCE OF ARCING, FLASHOVER OR INSULATION BREAKDOWN WHEN THE DIELECTRIC WITHSTANDING VOLTAGE TEST IS PERFORMED.
2102	COLD BEND. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2102.
2104	COLD BEND. TESTING SHALL BE PERFORMED AS FOLLOWS:
2106	THE TEST TEMPERATURE SHALL BE MINUS 2106 DEGREES CELSIUS.
2108	THE TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2108 DEGREES CELSIUS.
2110	ASSEMBLY SHALL BE CONDITIONED AT LOW TEMPERATURE FOR 2110 HOUR(S).
2112	A BEND OF 2112 DEGREES SHALL BE APPLIED TO THE CABLE ASSEMBLY.
2114	THE CABLE ASSEMBLY SHALL HAVE 2114 BENDS APPLIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
COLD BEND (CONT)	
AS FOLLOWS: (CONT)	
NUMBER OF TURNS ON MANDREL (QUANTITY)	2116
MANDREL DIAMETER (SELECT ONE)	
(INCHES)	2118
(MILLIMETERS)	2120
TURN RATE (TURNS PER SECOND)	2122
CORONA	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2252
AS FOLLOWS:	3108
MINIMUM CORONA STARTING VOLTAGE (VOLTS)	2253
MINIMUM CORONA EXTINCTION VOLTAGE (VOLTS)	2254
MAXIMUM APPARENT CORONA CHARGE AT CORONA STARTING VOLTAGE (PICOCOULOMBS)	3110
MAXIMUM CORONA CHARGE (PICOCOULOMBS)	3112
*AT TEST VOLTAGE (VOLTS)	3114

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2116	THE CABLE ASSEMBLY SHALL BE TURNED AROUND A MANDREL FOR A TOTAL OF 2116 TIMES AFTER LOW TEMPERATURE CONDITIONING.
2118	THE MANDREL DIAMETER SHALL BE 2118 INCH(S).
2120	THE MANDREL DIAMETER SHALL BE 2120 MILLIMETERS.
2122	THE CABLE ASSEMBLY SHALL BE TURNED AROUND THE MANDREL AT A RATE OF 2122 TURN(S) PER SECOND.
2252	CORONA. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2252.
3108	CORONA. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2253	THE VOLTAGE AT WHICH CORONA IS CONTINUOUS FOR MORE THAN 20 SECONDS (CORONA STARTING VOLTAGE) SHALL BE NOT LESS THAN 2253 VOLT(S).
2254	THE VOLTAGE AT WHICH CORONA DISAPPEARS COMPLETELY (CORONA EXTINCTION VOLTAGE) SHALL BE NOT LESS THAN 2254 VOLT(S).
3110	THE APPARENT CORONA CHARGE SHALL BE NOT GREATER THAN 3110 PICOCOULOMB(S) AT THE CORONA STARTING VOLTAGE.
3112 3114	THE APPARENT CORONA CHARGE SHALL BE NOT GREATER THAN 3112 PICOCOULOMB(S) AT 3114 VOLT(S).

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CORONA (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2242
PER ASTMD1868.	2243
EQUIPMENT SENSITIVITY (PICOCOULOMBS)	2249
TEST VOLTAGE (VOLTS)	2245
TEST VOLTAGE TYPE (SELECT ONE)	
DC.	3116
AC.	3124
TEST VOLTAGE (PERCENT OF RATED)	3118
TEST VOLTAGE FREQUENCY (HERTZ)	2246
TEST VOLTAGE (VOLTS, RMS) SUPERIMPOSED ON *VOLTAGE (VOLTS, DC)	3120 3122
CROSSTALK	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2272
MINIMUM NEAR END CROSSTALK (DECIBELS)	2274

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2242	CORONA. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2242.
2243	CORONA. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD1868.
2249	THE EQUIPMENT SHALL HAVE THE CAPABILITY OF DETECTING A PULSE LEVEL OF 2249 PICOCOULOMB(S).
2245	THE TEST VOLTAGE SHALL BE 2245 VOLT(S).
3116	THE TEST VOLTAGE SHALL BE DC.
3124	THE TEST VOLTAGE SHALL BE AC.
3118	THE TEST VOLTAGE SHALL BE 3118 PERCENT OF RATED VOLTAGE.
2246	THE TEST VOLTAGE FREQUENCY SHALL BE 2246 HERTZ.
3120 3122	THE TEST VOLTAGE SHALL BE 3120 VOLT(S) RMS SUPERIMPOSED ON A DC VOLTAGE OF 3122 VOLT(S).
2272	CROSSTALK. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2272.
2274	CROSSTALK. THE NEAR END CROSSTALK SHALL BE NOT LESS THAN 2274 DECIBEL(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CROSSTALK (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2262
PER MIL-C-55583.	2264
PULSE RATE (MEGAHERTZ)	2265
PULSE AMPLITUDE (VOLTS PEAK TO PEAK)	2267
PULSE WIDTH (NANOSECONDS)	2269
CURRENT OVERLOAD	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2292
NO SHORTING, LOSS OF CONTINUITY, BURNING, RUPTURE, OR OTHER DAMAGE.	2294
CONFORM TO MATING AND UNMATING FORCE REQUIREMENTS.	2296
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2282

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2262	CROSSTALK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2262.
2264	CROSSTALK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-55583.
2265	A PULSE PATTERN RATE OF 2265 MEGAHERTZ SHALL BE USED.
2267	A SIGNAL AMPLITUDE OF 2267 VOLTS PEAK-TO-PEAK SHALL BE USED.
2269	THE NOMINAL PULSE WIDTH AT PEAK AMPLITUDE SHALL BE 2269 NANOSECOND(S).
2292	CURRENT OVERLOAD. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCPET 2292.
2294	CURRENT OVERLOAD. THERE SHALL BE NO SHORTING OR LOSS OF CONTINUITY, BURNING, RUPTURE OR OTHER DAMAGE.
2296	THE CABLE ASSEMBLY SHALL CONFORM TO SPECIFIED MATING AND UNMATING FORCE REQUIREMENT(S).
2282	CURRENT OVERLOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2282.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CURRENT OVERLOAD (CONT)	
TEST METHODS (CONT)	
PER MIL-C-7974.	2284
TEST CURRENT (SELECT ONE)	
(AMPERES)	2286
PERCENT OF RATED CURRENT (PERCENT)	2287
TEST DURATION (SELECT ONE)	
(MINUTES)	2288
(HOURS)	2289
CURRENT APPLICATIONS (QUANTITY)	2291
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4908
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4906
MAXIMUM LEAKAGE (MILLIAMPERES)	4894

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2284	CURRENT OVERLOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-7974.
2286	THE TEST CURRENT SHALL BE 2286 AMPERE(S).
2287	THE TEST CURRENT SHALL BE 2287 PERCENT OF RATED CURRENT.
2288	THE TEST DURATION SHALL BE 2288 MINUTE(S).
2289	THE TEST DURATION SHALL BE 2289 HOUR(S).
2291	THERE SHALL BE 2291 APPLICATION(S) OF SPECIFIED CURRENT.
4908	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4908.
4906	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4894	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4894 MILLIAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4884
PER MIL-STD-1344, METHOD 3001.	2432
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4885
(VOLTS, AC)	4849
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4859
DURATION OF VOLTAGE APPLICATION (SECONDS)	4891
MOUNTING PER DOCUMENT (DOC DES)	6280
REGULATION OF TEST VOLTAGE (PERCENT)	6308
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4900
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4902
(MILLIAMPERES)	6310

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4884	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4884.
2432	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3001 OF MIL-STD-1344.
4885	TEST VOLTAGE SHALL BE 4885 VOLTS, DC.
4849	TEST VOLTAGE SHALL BE 4849 VOLTS, AC.
4859	SPECIAL PREPARATION SHALL BE IN ACCORDANCE WITH 4859.
4891	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4891 SECOND(S).
6280	MOUNTING SHALL BE IN ACCORDANCE WITH 6280.
6308	REGULATION OF THE TEST VOLTAGE SHALL BE WITHIN 6308 PERCENT.
4900	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4900 KILOVOLTAMPERE(S).
4902	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4902 AMPERE(S).
6310	THE SURGE CURRENT SHALL BE NOT GREATER THAN 6310 MILLIAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
PER MIL-STD-1344, METHOD 3001. (CONT)	
TEST CONDITION NUMBER	
II.	2455
III.	2456
IV.	2457
V.	2458
VI.	2459
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4874
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4856
MAXIMUM LEAKAGE (MILLIAMPERES)	4875

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2455	TEST CONDITION II SHALL APPLY.
2456	TEST CONDITION III SHALL APPLY.
2457	TEST CONDITION IV SHALL APPLY.
2458	TEST CONDITION V SHALL APPLY.
2459	TEST CONDITION VI SHALL APPLY.
4874	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.
4856	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4875	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4875 MILLIAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4861
PER MIL-STD-1344, METHOD 3001, TEST CONDITION I.	2451
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4854
(VOLTS, AC)	4855
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4850
DURATION OF VOLTAGE APPLICATION (SECONDS)	4867
MOUNTING PER DOCUMENT (DOC DES)	5000
REGULATION OF TEST VOLTAGE (PERCENT)	4869
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4870
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4717
(MILLIAMPERES)	4897
METHOD OF VOLTAGE CONNECTION PER DOCUMENT (DOC DES)	6267

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4861	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861.
2451	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3001 OF MIL-STD-1344. TEST CONDITION I SHALL APPLY.
4854	TEST VOLTAGE SHALL BE 4854 VOLTS, DC.
4855	TEST VOLTAGE SHALL BE 4855 VOLTS, AC.
4850	SPECIAL PREPARATION OR CONDITIONS SHALL BE IN ACCORDANCE WITH 4850.
4867	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4867 SECOND(S).
5000	MOUNTING SHALL BE IN ACCORDANCE WITH 5000.
4869	REGULATION OF TEST VOLTAGE SHALL BE WITHIN 4869 PERCENT.
4870	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4870 KILOVOLTAMPERE(S).
4717	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4717 AMPERE(S).
4897	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4897 MILLIAMPERE(S).
6267	METHOD OF CONNECTION OF TEST VOLTAGE SHALL BE IN ACCORDANCE WITH 6267.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DURABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2362
NO EVIDENCE OF CONTACT OR INSERT DAMAGE.	2364
MAXIMUM CONTACT RESISTANCE (MILLIVOLTS)	3366
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2352
PER MIL-STD-1344, METHOD 2016.	2354
CYCLES (QUANTITY)	2355
CYCLING RATE (CYCLES PER HOUR)	2357
EXPLOSIVE ATMOSPHERE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2382
NO EXPLOSION.	2384

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2362	DURABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2362.
2364	DURABILITY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
3366	THE VOLTAGE DROP AFTER TEST SHALL BE NOT GREATER THAN 3366 MILLIVOLT(S).
2352	DURABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2352.
2354	DURABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2016 OF MIL-STD-1344.
2355	THERE SHALL BE 2355 MATING AND UNMATING CYCLES.
2357	THE CYCLING RATE SHALL BE 2357 CYCLES PER HOUR.
2382	EXPLOSIVE ATMOSPHERE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2382.
2384	EXPLOSIVE ATMOSPHERE. THERE SHALL BE NO EXPLOSION IN THE TEST CHAMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
EXPLOSIVE ATMOSPHERE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2372
PER MIL-STD-810, METHOD 511.	2374
PROCEDURE (NUMBER)	2375
CHAMBER TEMPERATURE (DEGREES CELSIUS)	2377
APPLY RATED POWER.	2379
FLUID IMMERSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2872
NO EVIDENCE OF PHYSICAL DAMAGE.	2874
MEET MATING AND UNMATING FORCE REQUIREMENTS.	2876
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2842
PER MIL-STD-1344, METHOD 1016.	2843
FLUIDS DELETED (LETTERS)	2844

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2372	EXPLOSIVE ATMOSPHERE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2372.
2374	EXPLOSIVE ATMOSPHERE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 511 OF MIL-STD-810.
2375	PROCEDURE NUMBER 2375 SHALL APPLY.
2377	THE CHAMBER TEMPERATURE SHALL BE 2377 DEGREES CELSIUS.
2379	THE TEST SHALL BE PERFORMED WITH THE CABLE ASSEMBLY SUBJECTED TO MAXIMUM RATED POWER.
2872	FLUID IMMERSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2872.
2874	FLUID IMMERSION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE, BUT DISCOLORATION SHALL NOT BE CONSIDERED DETRIMENTAL.
2876	CONNECTORS SHALL MEET MATING AND UNMATING FORCE REQUIREMENT(S) AFTER TEST.
2842	FLUID IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2842.
2843	FLUID IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1016 OF MIL-STD-1344.
2844	FLUID(S) AS REFERENCED IN METHOD 1016 OF MIL-STD-1344 WHICH SHALL NOT BE USED SHALL BE LETTER(S) 2844.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLUID IMMERSION (CONT)	
PER MIL-STD-1344, METHOD 1016. (CONT)	
FLUIDS ADDED (NAME)	2846
IMMERSION DURATION (SELECT ONE)	
(MINUTES)	2858
(HOURS)	2860
DRAIN DURATION (HOURS)	2845
OVEN CURE TEMPERATURE (DEGREES CELSIUS)	2847
CYCLES OF IMMERSION (QUANTITY)	2849
IMMERSION DURATION IN METHOD 1016 FLUIDS (HOURS)	2851
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4760
FUNGUS RESISTANT BY CERTIFICATION OR BY TEST.	4761

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2846	FLUID(S) TO BE ADDED SHALL BE 2846.
2858	ADDED FLUID(S) IMMERSION DURATION SHALL BE 2858 MINUTE(S).
2860	ADDED FLUID(S) IMMERSION DURATION SHALL BE 2860 HOUR(S).
2845	ADDED FLUID(S) DRAIN DURATION SHALL BE 2845 HOUR(S).
2847	ADDED FLUID(S) 6-HOUR OVEN CURE TEMPERATURE SHALL BE 2847 DEGREES CELSIUS.
2849	THERE SHALL BE 2849 CYCLE(S) OF IMMERSION IN THE ADDED FLUID(S).
2851	IMMERSION DURATION FOR FLUIDS REFERENCED IN METHOD 1016 OF MIL-STD-1344 SHALL BE 2851 HOUR(S).
4760	FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.
4761	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNALS MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FUNGUS (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF FUNGUS GROWTH WHEN TESTED.	4762
REQUIREMENT 4 OF MIL-STD-454.	2425
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2426
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4754
PER MIL-STD-810, METHOD 508.	4755
TEST PERIOD (DAYS)	4756

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4762	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
2425	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
2426	THE INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 2426 MEGOHM(S).
4754	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.
4755	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.
4756	TEST PERIOD SHALL BE 4756 DAY(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4798
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	4799
NO DEGRADATION OF PERFORMANCE.	4815
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1477
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	4795
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	4805
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	4813
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	4803
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4788

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4798	HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.
4799	HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
4815	THERE SHALL BE NO DEGRADATION OF PERFORMANCE.
1477	THERE SHALL BE NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DIELECTRIC WITHSTANDING VOLTAGE IS PERFORMED.
4795	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4795 MEGOHM(S) AT HIGH HUMIDITY.
4805	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4805 MEGOHM(S) AFTER DRYING.
4813	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4813 MILLIAMPERE(S) AT HIGH HUMIDITY.
4803	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4803 MILLIAMPERE(S) AFTER DRYING.
4788	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-1344, METHOD 1002.	2472
PROCEDURE TYPE (SELECT ONE)	
TYPE I.	2474
DURATION OF POLARIZING VOLTAGE (HOURS)	4790
TYPE II.	2476
STEP 7A NOT REQUIRED.	2478
TYPE III.	2480
STEP 7A NOT REQUIRED.	2482
POLARIZING VOLTAGE (VOLTS DC)	4793
POLARIZING VOLTAGE BETWEEN ALTERNATE CONTACTS CONNECTED ELECTRICALLY AND OTHER CONTACTS AND SHELL CONNECTED ELECTRICALLY.	2484
DIELECTRIC WITHSTANDING VOLTAGE (SELECT ONE)	
(VOLTS AC)	2486
(VOLTS DC)	2488
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	2490
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER REMOVAL FROM CHAMBER.	2492

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2472	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1002 OF MIL-STD-1344.
2474	PROCEDURE TYPE I SHALL APPLY.
4790	POLARIZING VOLTAGE SHALL BE APPLIED FOR 4790 HOUR(S).
2476	PROCEDURE TYPE II SHALL APPLY.
2478	STEP 7A SHALL NOT APPLY.
2480	PROCEDURE TYPE III SHALL APPLY.
2482	STEP 7A SHALL NOT APPLY.
4793	POLARIZING VOLTAGE SHALL BE 4793 VOLTS DC.
2484	POLARIZING VOLTAGE SHALL BE APPLIED BETWEEN ALTERNATE CONTACTS CONNECTED TOGETHER ELECTRICALLY AND THE REMAINING CONTACTS AND SHELL CONNECTED ELECTRICALLY.
2486	THE DIELECTRIC WITHSTANDING VOLTAGE SHALL BE 2486 VOLTS AC.
2488	THE DIELECTRIC WITHSTANDING VOLTAGE SHALL BE 2488 VOLTS DC.
2490	PERFORM DIELECTRIC WITHSTANDING VOLTAGE AT HIGH HUMIDITY.
2492	PERFORM DIELECTRIC WITHSTANDING VOLTAGE AFTER REMOVAL FROM THE CHAMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HYDROSTATIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2462
NO EVIDENCE OF TEST MEDIA LEAKAGE.	2464
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2466
NO EVIDENCE OF DIELECTRIC BREAKDOWN.	2468
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2442
PER MIL-STD-1344, METHOD 1006.	2444
TEST CONDITION (LETTER)	2446
TEST PROCEDURE (NUMBER)	2447
MOUNTING (SELECT ONE)	
CONNECTORS ATTACHED TO CLOSURE HEADS EACH END.	2448
COVER ON LOWER END.	2449
TEST MEDIUM (NAME)	2450
ENERGIZE WITH RATED POWER.	2452

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2462	HYDROSTATIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2462.
2464	HYDROSTATIC PRESSURE. THERE SHALL BE NO EVIDENCE OF LEAKAGE OF THE TEST MEDIA INTO THE ASSEMBLY.
2466	THE INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 2466 MEGOHM(S).
2468	THERE SHALL BE NO EVIDENCE OF ARCING, FLASHOVER OR INSULATION BREAKDOWN WHEN DIELECTRIC WITHSTANDING VOLTAGE IS APPLIED AFTER THE TEST.
2442	HYDROSTATIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2442.
2444	HYDROSTATIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1006 OF MIL-STD-1344.
2446	TEST CONDITION LETTER 2446 SHALL APPLY.
2447	TEST PROCEDURE NUMBER 2447 SHALL APPLY.
2448	TEST SPECIMEN SHALL BE A COMPLETE ASSEMBLY WITH CONNECTORS ATTACHED TO CLOSURE HEADS AT EACH END.
2449	TEST SPECIMEN SHALL BE A COMPLETE ASSEMBLY WITH A COVER ON LOWER END.
2450	TEST MEDIUM SHALL BE 2450.
2452	ASSEMBLY SHALL BE ENERGIZED WITH RATED POWER DURING TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMPEDANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2542
AS FOLLOWS:	2543
FIRST OR ONLY IMPEDANCE REQUIREMENT	
MAXIMUM IMPEDANCE (OHMS)	2545
MINIMUM IMPEDANCE (OHMS)	2544
FIRST TEST FREQUENCY RANGE (SELECT ONE)	
LOW FREQUENCY (KILOHERTZ)	2547
*HIGH FREQUENCY (KILOHERTZ)	2549
LOW FREQUENCY (MEGAHERTZ)	2550
*HIGH FREQUENCY (MEGAHERTZ)	2551
SECOND IMPEDANCE REQUIREMENT	
MAXIMUM IMPEDANCE (OHMS)	2553
MINIMUM IMPEDANCE (OHMS)	2552
SECOND TEST FREQUENCY RANGE (SELECT ONE)	
LOW FREQUENCY (KILOHERTZ)	2555
*HIGH FREQUENCY (KILOHERTZ)	2556
LOW FREQUENCY (MEGAOHERTZ)	2561
*HIGH FREQUENCY (MEGAHERTZ)	2562
MAXIMUM PHASE ANGLE (DEGREES)	2558
TEST FREQUENCY RANGE (SELECT ONE)	
LOW FREQUENCY (KILOHERTZ)	2559
*HIGH FREQUENCY (KILOHERTZ)	2560

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2542	IMPEDANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2542.
2543	IMPEDANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2545	THE IMPEDANCE SHALL BE NOT GREATER THAN 2545 OHMS.
2544	THE IMPEDANCE SHALL BE NOT LESS THAN 2544 OHM(S).
2547 2549	THIS REQUIREMENT SHALL BE FROM 2547 TO 2549 KILOHERTZ.
2550 2551	THIS REQUIREMENT SHALL BE FROM 2550 TO 2551 MEGAHERTZ.
2553	THE IMPEDANCE SHALL BE NOT GREATER THAN 2553 OHMS.
2552	THE IMPEDANCE SHALL BE NOT LESS THAN 2552 OHMS.
2555 2556	THIS REQUIREMENT SHALL BE FROM 2555 TO 2556 KILOHERTZ.
2561 2562	THIS REQUIREMENT SHALL BE FROM 2561 TO 2562 MEGAHERTZ.
2558	THE PHASE ANGLE SHALL BE NOT GREATER THAN 2558 DEGREE(S).
2559 2560	THE PHASE ANGLE SHALL BE MEASURED OVER A FREQUENCY RANGE OF 2559 TO 2560 KILOHERTZ.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMPEDANCE (CONT)	
TEST FREQUENCY RANGE (CONT)	
LOW FREQUENCY (MEGAHERTZ)	2563
*HIGH FREQUENCY (MEGAHERTZ)	2564
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2522
MEASURE IMPEDANCE AT SPECIFIED FREQUENCIES.	2524
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1380
AS FOLLOWS:	6359
*MINIMUM INSULATION RESISTANCE (SELECT ONE)	
SINGLE TEST	
(MEGOHMS)	1386
MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	1384
*SECOND TEST (MEGOHMS)	1387
NO EVIDENCE OF PHYSICAL DAMAGE.	1407

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2563 2564	THE PHASE ANGLE SHALL BE MEASURED OVER A FREQUENCY RANGE OF 2563 TO 2564 MEGAHERTZ.
2522	IMPEDANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2522.
2524	IMPEDANCE. TESTING SHALL BE PERFORMED TO VERIFY REQUIREMENT(S) AT THE SPECIFIED FREQUENCIES.
1380	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.
6359	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1386	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 1386 MEGOHM(S).
1384	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1384 MEGOHM(S) AT THE FIRST TEST TEMPERATURE.
1387	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1387 MEGOHM(S) AT THE SECOND TEST TEMPERATURE.
1407	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1371
PER MIL-STD-1344, METHOD 3003.	2589
TEST VOLTAGE (VOLTS, DC)	1373
ELECTRIFICATION TIME (SECONDS)	1376
MAXIMUM MEASUREMENT ERROR AT REQUIRED VALUE (PERCENT)	1377
SPECIAL PREPARATIONS OR CONDITIONS PER DOCUMENT (DOC DES)	1520
FIRST TEST TEMPERATURE (DEGREES CELSIUS)	1372
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	1381
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1383
SPECIAL PREPARATIONS ____	2594
MATING AND UNMATING FORCES	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2172

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1371	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.
2589	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3003 OF MIL-STD-1344.
1373	TEST POTENTIAL SHALL BE 1373 VOLTS, DC.
1376	ELECTRIFICATION DURATION SHALL BE 1376 SECOND(S).
1377	THE MEASUREMENT ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1377 PERCENT.
1520	SPECIAL PREPARATIONS OR CONDITIONS SHALL BE IN ACCORDANCE WITH 1520.
1372	FIRST TEST TEMPERATURE SHALL BE 1372 DEGREES CELSIUS.
1381	SECOND TEST TEMPERATURE SHALL BE 1381 DEGREES CELSIUS.
1383	TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1383 DEGREES CELSIUS.
2594	SPECIAL PREPARATIONS SHALL BE 2594.
2172	MATING AND UNMATING FORCES. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2172.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MATING AND UNMATING FORCES (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	2173
MAXIMUM MATING FORCE (SELECT ONE)	
(POUNDS)	2174
(NEWTONS)	2175
MAXIMUM UNMATING FORCE (SELECT ONE)	
(POUNDS)	2190
(NEWTONS)	2192
MINIMUM UNMATING FORCE (SELECT ONE)	
(POUNDS)	2178
(NEWTONS)	2180

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE | STANDARD PARAGRAPH

2173 MATING AND UNMATING FORCES. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2174 THE FORCE REQUIRED TO MATE CONNECTORS SHALL BE NOT GREATER THAN 2174 POUND(S).

2175 THE FORCE REQUIRED TO MATE CONNECTORS SHALL BE NOT GREATER THAN 2175 NEWTON(S).

2190 THE FORCE REQUIRED TO UNMATE CONNECTORS SHALL BE NOT GREATER THAN 2190 POUND(S).

2192 THE FORCE REQUIRED TO UNMATE CONNECTORS SHALL BE NOT GREATER THAN 2192 NEWTON(S).

2178 THE FORCE REQUIRED TO UNMATE CONNECTORS SHALL BE NOT LESS THAN 2178 POUND(S).

2180 THE FORCE REQUIRED TO UNMATE CONNECTORS SHALL BE NOT LESS THAN 2180 NEWTON(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MATING AND UNMATING FORCES (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM MATING OR UNMATING TORQUE (SELECT ONE)	
(OUNCE-INCHES)	2181
(POUND-INCHES)	2182
(NEWTON METERS)	2184
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2162
PER MIL-STD-1344, METHOD 2013.	2164
MATING RATE (SELECT ONE)	
GRADUAL.	2138
(INCHES PER MINUTE)	2152
(MILLIMETERS PER MINUTE)	2154
PREMEASUREMENT MATING AND UNMATING CYCLES (QUANTITY)	2156

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2181	THE TORQUE REQUIRED TO MATE AND UNMATE CONNECTORS SHALL BE NOT GREATER THAN 2181 OUNCE-INCH(S).
2182	THE TORQUE REQUIRED TO MATE AND UNMATE CONNECTORS SHALL BE NOT GREATER THAN 2182 POUND-INCH(S).
2184	THE TORQUE REQUIRED TO MATE AND UNMATE CONNECTORS SHALL BE NOT GREATER THAN 2184 NEWTON METER(S).
2162	MATING AND UNMATING FORCES. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2162.
2164	MATING AND UNMATING FORCES. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2013 OF MIL-STD-1344.
2138	CONNECTORS SHALL BE GRADUALLY MATED AND UNMATED.
2152	CONNECTOR SHALL BE MATED AND UNMATED AT A RATE NOT GREATER THAN 2152 INCHES PER MINUTE.
2154	CONNECTOR SHALL BE MATED AND UNMATED AT A RATE NOT GREATER THAN 2154 MILLIMETERS PER MINUTE.
2156	PRIOR TO MEASUREMENTS CONNECTORS SHALL BE MATED AND UNMATED 2156 TIMES.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MECHANICAL ABUSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2682
NO EVIDENCE OF PHYSICAL DAMAGE.	2684
NO LOSS OF CONTINUITY.	2686
NO EVIDENCE OF DIELECTRIC BREAKDOWN.	2688
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2689
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2662
PER MIL-C-24360.	2664
DROP HEIGHT (SELECT ONE)	
(FEET)	2666
(METERS)	2667

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2682	MECHANICAL ABUSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2682.
2684	MECHANICAL ABUSE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2686	THERE SHALL BE NO LOSS OF CONTINUITY AFTER THE TEST.
2688	THERE SHALL BE NO EVIDENCE OF ARCING, FLASHOVER OR INSULATION BREAKDOWN WHEN DIELECTRIC WITHSTANDING VOLTAGE IS APPLIED AFTER THE TEST.
2689	THE INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 2689 MEGOHM(S).
2662	MECHANICAL ABUSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2662.
2664	MECHANICAL ABUSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-24360.
2666	THE DROP HEIGHT SHALL BE 2666 FEET.
2667	THE DROP HEIGHT SHALL BE 2667 METER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MECHANICAL ABUSE (CONT)	
PER MIL-C-24360, (CONT)	
TEST LENGTH (SELECT ONE)	
(FEET)	2669
(METERS)	2670
DROP HEIGHT, COVERS INSTALLED (SELECT ONE)	
(FEET)	2672
(METERS)	2674
DROP HEIGHT, COVERS DANGLING (SELECT ONE)	
(FEET)	2676
(METERS)	2678
OZONE EXPOSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2722

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2669	THE TEST LENGTH OF THE CABLE ASSEMBLY SHALL BE 2669 FEET.
2670	THE TEST LENGTH OF THE CABLE ASSEMBLY SHALL BE 2670 METER(S).
2672	THE ASSEMBLY SHALL BE DROPPED FROM A HEIGHT OF 2672 FEET WITH THE PROTECTIVE COVER(S) INSTALLED.
2674	THE ASSEMBLY SHALL BE DROPPED FROM A HEIGHT OF 2674 METER(S) WITH PROTECTIVE COVER(S) INSTALLED.
2676	THE ASSEMBLY SHALL BE DROPPED FROM A HEIGHT OF 2676 FEET WITH PROTECTIVE COVER(S) DANGLING.
2678	THE ASSEMBLY SHALL BE DROPPED FROM A HEIGHT OF 2678 METER(S) WITH PROTECTIVE COVER(S) DANGLING.
2722	OZONE EXPOSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2722.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OZONE EXPOSURE (CONT)	
REQUIREMENTS (CONT)	
NO CRACKING OF DIELECTRIC OR PERFORMANCE DEGRADATION.	2724
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2702
PER MIL-STD-1344, METHOD 1007.	2704
OZONE CONCENTRATION BY VOLUME	
MINIMUM (PARTS PER MILLION)	2705
MAXIMUM (PARTS PER MILLION)	2707
EXPOSURE DURATION (HOURS)	2709
CHAMBER TEMPERATURE (DEGREES CELSIUS)	2708
TOLERANCE (DEGREES CELSIUS)	2710
RF HIGH POTENTIAL WITHSTANDING VOLTAGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2942

Source: https://assist.dla.mil Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2724	OZONE EXPOSURE. THE CONNECTOR SHALL SHOW NO EVIDENCE OF CRACKING OF DIELECTRIC MATERIAL OR OTHER DAMAGE DUE TO OZONE EXPOSURE THAT WILL ADVERSELY AFFECT PERFORMANCE.
2702	OZONE EXPOSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2702.
2704	OZONE EXPOSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1007 OF MIL-STD-1344.
2705	OZONE CONCENTRATION SHALL BE NOT LESS THAN 2705 PARTS PER MILLION BY VOLUME.
2707	OZONE CONCENTRATION SHALL BE NOT GREATER THAN 2707 PARTS PER MILLION BY VOLUME.
2709	EXPOSURE DURATION SHALL BE 2709 HOUR(S).
2708	CHAMBER TEMPERATURE SHALL BE 2708 DEGREES CELSIUS.
2710	CHAMBER TEMPERATURE TOLERANCE SHALL BE 2710 DEGREES CELSIUS.
2942	RF HIGH POTENTIAL WITHSTANDING VOLTAGE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2942.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RF HIGH POTENTIAL WITHSTANDING VOLTAGE (CONT)	
REQUIREMENTS (CONT)	
NO BREAKDOWN.	2944
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2932
PER MIL-C-39012.	2933
TEST VOLTAGE (VOLTS RMS)	2934
TEST FREQUENCY (MEGAHERTZ)	2935
TEST COMPLETE ASSEMBLY.	2936
SALT SPRAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4878
NO EVIDENCE OF EXCESSIVE CORROSION, WARPING OR CRACKING.	2945
NO INCREASE IN FORCE TO ENGAGE AND DISENGAGE.	2946

Source: https://assist.dla.mil - Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2944	RF HIGH POTENTIAL WITHSTANDING VOLTAGE. THERE SHALL BE NO BREAKDOWN OF THE ASSEMBLY.
2932	RF HIGH POTENTIAL WITHSTANDING VOLTAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2932.
2933	RF HIGH POTENTIAL WITHSTANDING VOLTAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-39012.
2934	THE TEST VOLTAGE SHALL BE 2934 VOLTS RMS.
2935	THE TEST FREQUENCY SHALL BE 2935 MEGAHERTZ.
2936	THE COMPLETE CABLE ASSEMBLY SHALL BE TESTED.
4878	SALT SPRAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4878.
2945	SALT SPRAY. THERE SHALL BE NO EVIDENCE OF EXCESSIVE CORROSION. EXCESSIVE CORROSION IS DEFINED AS THAT WHICH INTERFERES WITH THE ELECTRICAL OR MECHANICAL PERFORMANCE, OR, IN THE CASE OF PLATED METAL, CORROSION WHICH HAS PASSED THROUGH THE PLATING AND ATTACKED THE BASE METAL. THERE SHALL BE NO WARPING, CRACKING OR OTHER DAMAGE.
2946	THERE SHALL BE NO INCREASE IN FORCE REQUIRED TO MATE AND UNMATE CONNECTORS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT SPRAY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4770
PER MIL-STD-1344, METHOD 1001.	2947
*TEST CONDITION (LETTER)	4772
MOUNTING (SELECT ONE)	
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4773
MOUNTING SHALL BE BY NORMAL METHOD.	4765
MOUNTING SHALL BE BY ANY SUITABLE METHOD.	4766
SHOCK, SPECIFIED PULSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1508
NO EVIDENCE OF PHYSICAL DAMAGE.	1509
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY DURING TEST.	1471
MAXIMUM (MILLISECONDS)	3007
MAXIMUM (MICROSECONDS)	3009

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
4770	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4770.
2947	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1001 OF MIL-STD-1344.
4772	TEST CONDITION LETTER 4772 SHALL APPLY.
4773	MOUNTING SHALL BE IN ACCORDANCE WITH 4773.
4765	MOUNTING SHALL BE BY THE NORMAL METHOD.
4766	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
1508	SHOCK, SPECIFIED PULSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1508.
1509	SHOCK, SPECIFIED PULSE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1471	THERE SHALL BE NO DISCONTINUITY DURING THE TEST.
3007	DISCONTINUITY DURING TEST SHALL BE NOT GREATER THAN 3007 MILLISECOND(S).
3009	DISCONTINUITY DURING TEST SHALL BE NOT GREATER THAN 3009 MICROSECOND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, SPECIFIED PULSE (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
NO DISENGAGEMENT OR LOOSENING OF COUPLING.	3011
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1502
PER MIL-STD-1344, METHOD 2004.	3012
*TEST CONDITION (LETTER)	1504
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	4686
NORMAL MOUNTING METHOD.	4685
MOUNT PER DOCUMENT (DOC DES)	4684
MAXIMUM LOAD (MILLIAMPERES)	3014
TEMPERATURE-ALTITUDE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3142

Source: https://assist.dla.mil - Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3011	THERE SHALL BE NO DISENGAGEMENT OR LOOSENING OF THE CONNECTOR COUPLING.
1502	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1502.
3012	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2004 OF MIL-STD-1344.
1504	TEST CONDITION LETTER 1504 SHALL APPLY.
4686	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4685	MOUNTING SHALL BE BY THE NORMAL METHOD.
4684	MOUNTING SHALL BE IN ACCORDANCE WITH 4684.
3014	ELECTRICAL LOAD SHALL BE A CURRENT NOT GREATER THAN 3014 MILLIAMPERE(S).
3142	TEMPERATURE-ALTITUDE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3142.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE-ALTITUDE (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE.	3144
NO EVIDENCE OF DIELECTRIC BREAKDOWN.	3146
MAXIMUM CORONA EXTINCTION VOLTAGE (VOLTS AC)	3148
MAXIMUM VSWR (RATIO)	3150
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3132
PER MIL-STD-810, METHOD 504.	3134
EQUIPMENT CATEGORY (NUMBER)	3136
TEMPERATURE CYCLING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3152
NO EVIDENCE OF CRACKING OR OTHER DAMAGE.	3153

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3144	TEMPERATURE-ALTITUDE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
3146	THERE SHALL BE NO EVIDENCE OF ARCING, FLASHOVER OR INSULATION BREAKDOWN WHEN THE DIELECTRIC WITHSTANDING VOLTAGE TEST IS PERFORMED.
3148	THE CORONA EXTINCTION VOLTAGE SHALL BE NOT GREATER THAN 3148 VOLTS AC.
3150	THE VSWR SHALL BE NOT GREATER THAN 3150 AFTER THE TEST.
3132	TEMPERATURE-ALTITUDE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3132.
3134	TEMPERATURE-ALTITUDE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 504 OF MIL-STD-810.
3136	EQUIPMENT CATEGORY NUMBER 3136 SHALL APPLY.
3152	TEMPERATURE CYCLING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3152.
3153	TEMPERATURE CYCLING. THERE SHALL BE NO EVIDENCE OF DAMAGE DETRIMENTAL TO THE OPERATION OF THE CONNECTOR.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE CYCLING (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3155
PER MIL-STD-1344, METHOD 1003.	3156
*TEST CONDITION (LETTER)	4715
NUMBER OF CYCLES (QUANTITY)	3157
STEP 1 TEMPERATURE (DEGREES CELSIUS)	3158
POSITIVE TOLERANCE (DEGREES CELSIUS)	3159
NEGATIVE TOLERANCE (DEGREES CELSIUS)	3161
STEP 3 TEMPERATURE (DEGREES CELSIUS)	3163
POSITIVE TOLERANCE (DEGREES CELSIUS)	3165
NEGATIVE TOLERANCE (DEGREES CELSIUS)	3167
MINIMUM EXPOSURE DURATIONS (SELECT ONE)	
(HOURS)	3169
(MINUTES)	3171

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3155	TEMPERATURE CYCLING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3155.
3156	TEMPERATURE CYCLING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1003 OF MIL-STD-1344.
4715	TEST CONDITION LETTER 4715 SHALL APPLY.
3157	THE NUMBER OF CYCLES SHALL BE 3157.
3158	THE STEP 1 TEMPERATURE SHALL BE 3158 DEGREES CELSIUS.
3159	THE STEP 1 POSITIVE TEMPERATURE TOLERANCE SHALL BE 3159 DEGREES CELSIUS.
3161	THE STEP 1 NEGATIVE TEMPERATURE TOLERANCE SHALL BE 3161 DEGREES CELSIUS.
3163	THE STEP 3 TEMPERATURE SHALL BE 3163 DEGREES CELSIUS.
3165	THE STEP 3 POSITIVE TEMPERATURE TOLERANCE SHALL BE 3165 DEGREES CELSIUS.
3167	THE STEP 3 NEGATIVE TEMPERATURE TOLERANCE SHALL BE 3167 DEGREES CELSIUS.
3169	THE STEPS 1 AND 3 EXPOSURE DURATIONS SHALL BE NOT LESS THAN 3169 HOUR(S).
3171	THE STEPS 1 AND 3 EXPOSURE DURATIONS SHALL BE NOT LESS THAN 3171 MINUTE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE LIFE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3186
NO CRACKING, FRACTURE OR OTHER DAMAGE.	3187
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3188
PER MIL-STD-1344, METHOD 1005.	3189
TEST CONDITION (NUMBER)	3190
LENGTH OF TEST CONDITION (LETTER)	3191
ELECTRICAL LOAD ____	3192
TORQUE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3232
NO EVIDENCE OF PHYSICAL DAMAGE.	3234

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3186	TEMPERATURE LIFE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3186.
3187	TEMPERATURE LIFE. THERE SHALL BE NO EVIDENCE OF CRACKING, FRACTURE, OR OTHER DAMAGE DETRIMENTAL TO THE OPERATION OF THE ASSEMBLY.
3188	TEMPERATURE LIFE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3188.
3189	TEMPERATURE LIFE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1005 OF MIL-STD-1344.
3190	THE TEST CONDITION NUMBER SHALL BE 3190.
3191	THE LENGTH OF TEST CONDITION LETTER SHALL BE 3191.
3192	THE ELECTRICAL LOAD CONDITIONS SHALL BE 3192.
3232	TORQUE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3232.
3234	TORQUE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TORQUE (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
CONFORM TO INSULATION RESISTANCE REQUIREMENTS.	3236
CONFORM TO CIRCUIT RESISTANCE REQUIREMENTS.	3238
MINIMUM INSULATION RESISTANCE (MEGOHMS)	3240
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3202
PER MIL-C-60906.	3204
APPLIED TORQUE (SELECT ONE)	
(POUND-INCHES)	3206
TOLERANCE (POUND-INCHES)	3210
(NEWTON METERS)	3208
TOLERANCE (NEWTON METERS)	3212
NUMBER OF TORQUE APPLICATIONS (QUANTITY)	3214

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3236	AFTER THE TEST, THE CABLE ASSEMBLY SHALL CONFORM TO THE INSULATION RESISTANCE REQUIREMENTS.
3238	AFTER THE TEST, THE CABLE ASSEMBLY SHALL CONFORM TO THE CIRCUIT RESISTANCE REQUIREMENTS.
3240	THE INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 3240 MEGOHM(S).
3202	TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3202.
3204	TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-60906.
3206	A TORQUE OF 3206 POUND-INCH(S) SHALL BE APPLIED.
3210	THE TORQUE TOLERANCE SHALL BE PLUS OR MINUS 3210 POUND-INCH(S).
3208	THE APPLIED TORQUE SHALL BE 3208 NEWTON METER(S).
3212	THE TORQUE TOLERANCE SHALL BE PLUS OR MINUS 3212 NEWTON METER(S).
3214	THERE SHALL BE 3214 TORQUE APPLICATION(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4681
NO EVIDENCE OF PHYSICAL DAMAGE.	4682
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY.	1374
MAXIMUM DISCONTINUITY (SELECT ONE)	
(MILLISECONDS)	1545
(MICROSECONDS)	1546
NO LOOSENING OF HARDWARE.	3250
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1505
PER MIL-STD-1344, METHOD 2005.	3500
TEST CONDITION NUMBER I.	3502
DURATION EACH DIRECTION (HOURS)	3504
TEST CONDITION NUMBER II.	3506

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE | STANDARD PARAGRAPH

4681 VIBRATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4681.

4682 VIBRATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

1374 THERE SHALL BE NO DISCONTINUITY DURING TEST.

1545 THE DISCONTINUITY SHALL BE NOT GREATER THAN 1545 MILLISECOND(S).

1546 THE DISCONTINUITY SHALL BE NOT GREATER THAN 1546 MICROSECOND(S).

3250 THERE SHALL BE NO LOOSENING OF HARDWARE.

1505 VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1505.

3500 VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2005 OF MIL-STD-1344.

3502 TEST CONDITION NUMBER I SHALL APPLY.

3504 DURATION OF VIBRATION IN EACH DIRECTION SHALL BE 3504 HOUR(S).

3506 TEST CONDITION NUMBER II SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION (CONT)	
PER MIL-STD-1344, METHOD 2005. (CONT)	
TEST CONDITION NUMBER III.	3508
TEST CONDITION NUMBER IV.	3510
TEST CONDITION NUMBER V.	3512
TEST CONDITION (LETTER)	3514
MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	3516
PER DOCUMENT (DOC DES)	3518
DURATION PER AXIS (SELECT ONE)	
3 MINUTES.	3520
15 MINUTES.	3522
1.5 HOURS.	3524
8 HOURS.	3526
DIRECTION OF MOTION (SELECT ONE)	
PERPENDICULAR TO MATING PLANE.	3528
THREE MUTUALLY PERPENDICULAR.	3530

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3508	TEST CONDITION NUMBER III SHALL APPLY.
3510	TEST CONDITION NUMBER IV SHALL APPLY.
3512	TEST CONDITION NUMBER V SHALL APPLY.
3514	TEST CONDITION LETTER 3514 SHALL APPLY.
3516	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
3518	MOUNTING SHALL BE IN ACCORDANCE WITH 3518.
3520	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 3 MINUTES.
3522	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 15 MINUTES.
3524	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 1.5 HOURS.
3526	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 8 HOURS.
3528	THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE MATING PLANE OF THE CONNECTOR(S) IN NORMAL MOUNTING POSITION.
3530	THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUALLY PERPENDICULAR PLANES.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION (CONT)	
TEST CONDITION NUMBER V. (CONT)	
NUMBER OF TEST POINTS (QUANTITY)	3532
TEST POINTS ____	3534
TEST CONDITION NUMBER VI.	3536
TEST CONDITION (LETTER)	3538
MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	3540
PER DOCUMENT (DOC DES)	3542
DURATION PER AXIS (SELECT ONE)	
3 MINUTES.	3544
15 MINUTES.	3546
1.5 HOURS.	3548
8 HOURS.	3550
DIRECTION OF MOTION (SELECT ONE)	
PERPENDICULAR TO MATING PLANE.	3552
THREE MUTUALLY PERPENDICULAR.	3554

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3532	THERE SHALL BE 3532 TEST POINT(S).
3534	TEST POINT(S) SHALL BE 3534.
3536	TEST CONDITION NUMBER VI SHALL APPLY.
3538	TEST CONDITION LETTER 3538 SHALL APPLY.
3540	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
3542	MOUNTING SHALL BE IN ACCORDANCE WITH 3542.
3544	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 3 MINUTES.
3546	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 15 MINUTES.
3548	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 1.5 HOURS.
3550	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 8 HOURS.
3552	THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE MATING PLANE OF THE CONNECTOR(S) IN NORMAL MOUNTING POSITION.
3554	THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUALLY PERPENDICULAR PLANES.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION (CONT)	
TEST CONDITION NUMBER VI. (CONT)	
NUMBER OF TEST POINTS (QUANTITY)	3556
TEST POINTS ____	3558
ELECTRICAL LOAD (MILLIAMPERES)	3560
MONITOR FOR DISCONTINUITIES.	3562
METHOD FOR DETERMINING RESONANCE ____	3564
VOLTAGE STANDING WAVE RATIO	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3312
MAXIMUM (VALUE)	3314
MAXIMUM (VALUE) *PLUS (FACTOR)	3370 3372
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3302
PER MIL-C-39012.	3304

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

3556 THERE SHALL BE 3556 TEST POINT(S).

3558 TEST POINT(S) SHALL BE 3558.

3560 THE ELECTRICAL LOAD, ALL CONTACTS, SHALL BE NOT GREATER THAN 3560 MILLIAMPERE(S).

3562 CONNECTORS SHALL BE MONITORED FOR DISCONTINUITIES.

3564 THE METHOD FOR DETERMINING RESONANCE SHALL BE 3564.

3312 VOLTAGE STANDING WAVE RATIO. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3312.

3314 VOLTAGE STANDING WAVE RATIO. THE VOLTAGE STANDING WAVE RATIO SHALL BE LESS THAN 3314.

3370 VOLTAGE STANDING WAVE RATIO. THE VOLTAGE STANDING WAVE
3372 RATIO SHALL BE LESS THAN 3370 PLUS 3372 F (F IN GHZ).

3302 VOLTAGE STANDING WAVE RATIO. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3302.

3304 VOLTAGE STANDING WAVE RATIO. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-39012.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VOLTAGE STANDING WAVE RATIO (CONT)	
PER MIL-C-39012. (CONT)	
SWEPT FREQUENCY	
FROM (MEGAHERTZ)	3572
*TO (MEGAHERTZ)	3574
TEST SETUP AS FOLLOWS:	3576
ITEM 6 - MAXIMUM VSWR (VALUE)	3578
*PLUS (FACTOR)	3580
ITEM 16 - MAXIMUM VSWR (VALUE)	3582
*PLUS (FACTOR)	3584
CHECKOUT - MAXIMUM VSWR (VALUE)	3586
*PLUS (FACTOR)	3588
GROUP B (SELECT ONE)	
MAXIMUM VSWR (VALUE)	3590
*PLUS (FACTOR)	3592
LONG CABLE METHOD.	3594
QUALIFICATION AND GROUP C (SELECT ONE)	
MAXIMUM VSWR (VALUE)	3596
LONG CABLE METHOD.	3598

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3572 3574	SWEPT FREQUENCY SHALL BE FROM 3572 MEGAHERTZ TO 3574 MEGAHERTZ.
3576	SWEPT FREQUENCY VSWR TEST SETUP SHALL BE AS FOLLOWS:
3578 3580	ITEM 6-VSWR SHALL BE LESS THAN 3578 PLUS 3580 F (F IN GHZ).
3582 3584	ITEM 16-VSWR SHALL BE LESS THAN 3582 PLUS 3584 F (F IN GHZ).
3586 3588	SECOND STEP OF VSWR CHECKOUT PROCEDURE-VSWR SHALL BE LESS THAN 3586 PLUS 3588 F (F IN GHZ).
3590 3592	GROUP B INSPECTION-VSWR SHALL BE LESS THAN 3590 PLUS 3592 F (F IN GHZ).
3594	GROUP B INSPECTION-USE STEP 5, LONG CABLE METHOD.
3596	QUALIFICATION AND GROUP C INSPECTION-VSWR SHALL BE NOT GREATER THAN 3596.
3598	QUALIFICATION AND GROUP C INSPECTION-USE STEP 5, LONG CABLE METHOD.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STORAGE CONDITIONS	
(YEARS)	1529
CERTIFY MAXIMUM CURE DATE TO DELIVERY (QUARTERS)	4942
CERTIFY MINIMUM SHELF LIFE AFTER DELIVERY (QUARTERS)	4943
CERTIFY MAXIMUM MANUFACTURE DATE TO DELIVERY (QUARTERS)	4944
AGE LIMITATION PER MIL-STD-1523.	5209
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	STORAGE CONDITIONS.
1529	ITEMS SHALL WITHSTAND 1529 YEARS OF STORAGE WHEN PROPERLY PRESERVED, PACKAGED AND MECHANICALLY PROTECTED WITHOUT REQUIRING MAJOR REPAIR.
4942	MANUFACTURER SHALL CERTIFY THAT THE CURE DATE SHALL BE NOT GREATER THAN 4942 QUARTERS PRIOR TO DELIVERY DATE.
4943	MANUFACTURER SHALL CERTIFY THAT THERE SHALL BE NOT LESS THAN 4943 QUARTERS OF SHELF LIFE AFTER DELIVERY.
4944	MANUFACTURER SHALL CERTIFY THAT THE DATE OF MANUFACTURE SHALL BE NOT GREATER THAN 4944 QUARTERS PRIOR TO DATE OF DELIVERY.
5209	AGE LIMITATIONS OF THE FINISHED PRODUCT SHALL BE IN ACCORDANCE WITH MIL-STD-1523.
	MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995
MARKING ON SHRINK TUBING.	1764
TUBING DOCUMENT (DOC DES)	1766
TYBING (TYPE)	1768
MARKING ON MARKERS PER DOCUMENT (DOC DES)	1702
MARKER (PART NUMBER)	1704
MARKING METHOD ____	1706
CHARACTERS (TYPE)	1708
CHARACTER TYPE DOCUMENT (DOC DES)	1752

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.
1764	CABLE MARKINGS SHALL BE MADE ON HEAT SHRINKABLE TUBING.
1766	THE TUBING SHALL BE IN ACCORDANCE WITH 1766.
1768	THE TUBING SHALL BE TYPE 1768.
1702	CABLE MARKINGS SHALL BE ON MARKERS IN ACCORDANCE WITH 1702.
1704	MARKER PART NUMBER SHALL BE 1704.
1706	THE MARKING METHOD SHALL BE 1706.
1708	CHARACTERS SHALL BE 1708 TYPE.
1752	CHARACTER TYPE SHALL BE IN ACCORDANCE WITH 1752.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADDITIONAL PART MARKING (CONT)	
CHARACTER COLOR (NAME)	1778
MINIMUM CHARACTER HEIGHT (SELECT ONE)	
(INCH)	1786
(MILLIMETERS)	1788
ONE CENTRALLY LOCATED MARKER.	1806
TOTAL MARKINGS (QUANTITY)	1800
CABLE MARKING PER MARKING REFERENCE TABLE.	1710
NOTE: SEE APPENDIX A, TABLE V.	
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil - Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1778	CHARACTER COLOR SHALL BE 1778.
1786	CHARACTER HEIGHT SHALL BE NOT LESS THAN 1786 INCH.
1788	CHARACTER HEIGHT SHALL BE NOT LESS THAN 1788 MILLIMETER(S).
1806	THERE SHALL BE ONE CABLE MARKER WHICH SHALL BE CENTRALLY LOCATED ON THE CABLE ASSEMBLY.
1800	THERE SHALL BE 1800 MARKING POSITIONS ON THE CABLE ASSEMBLY.
1710	CABLE MARKINGS SHALL BE IN ACCORDANCE WITH THE MARKING REFERENCE TALBE.

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI

(Project EDS-A286)

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX A

TABLES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE III. WIRING TABLE.

CONNECTION	TO CONNECTION	REMARKS
4000	4100	4200
4001	4101	4201
4002	4102	4202
4003	4103	4203
4004	4104	4204
4005	4105	4205
4006	4106	4206
4007	4107	4207
4008	4108	4208
4009	4109	4209
4010	4110	4210
4011	4111	4211
4012	4112	4212
4013	4113	4213
4014	4114	4214
4015	4115	4215
4016	4116	4216
4017	4117	4217
4018	4118	4218
4019	4119	4219
4020	4120	4220
4021	4121	4221
4022	4122	4222
4023	4123	4223
4024	4124	4224
4025	4125	4225
4026	4126	4226
4027	4127	4227
4028	4128	4228
4029	4129	4229
4030	4130	4230
4031	4131	4231
4032	4132	4232
4033	4133	4233
4034	4134	4234
4035	4135	4235
4036	4136	4236
4037	4137	4237
4038	4138	4238
4039	4139	4239
4040	4140	4240
4041	4141	4241
4042	4142	4242

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE III. WIRING TABLE. (CONT)

CONNECTION	TO CONNECTION	REMARKS
4043	4143	4243
4044	4144	4244
4045	4145	4245
4046	4146	4246
4047	4147	4247
4048	4148	4248
4049	4149	4249
4050	4150	4250
4051	4151	4251
4052	4152	4252
4053	4153	4253
4054	4154	4254
4055	4155	4255
4056	4156	4256
4057	4157	4257
4058	4158	4258
4059	4159	4259
4060	4160	4260
4061	4161	4261
4062	4162	4262
4063	4163	4263
4064	4164	4264
4065	4165	4265
4066	4166	4266
4067	4167	4267
4068	4168	4268
4069	4169	4269
4070	4170	4270
4071	4171	4271
4072	4172	4272
4073	4173	4273
4074	4174	4274
4075	4175	4275
4076	4176	4276
4077	4177	4277
4078	4178	4278
4079	4179	4279
4080	4180	4280
4081	4181	4281
4082	4182	4282
4083	4183	4283
4084	4184	4284
4085	4185	4285
4086	4186	4286

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE III. WIRING TABLE. (CONT)

CONNECTION	TO CONNECTION	REMARKS
4087	4187	4287
4088	4188	4288
4089	4189	4289
4090	4190	4290
4091	4191	4291
4092	4192	4292
4093	4193	4293
4094	4194	4294
4095	4195	4295
4096	4196	4296
4097	4197	4297
4098	4198	4298

TABLE IV. CABLE ASSEMBLY CONNECTOR TABLE.

CONNECTOR	CONNECTOR 1	CONNECTOR 2	CONNECTOR 3
ILL. NO.	3400	3401	3402
MS NO.	3412	3413	3414
SPEC ID	3424	3425	3426
INSERT	3436	3437	3438
DWG DES	3448	3449	3450
ACCESSORY			
ILL NO.	3460	3461	3462
MS NO.	3472	3473	3474
SPEC ID	3484	3485	3486

CABLE ASSEMBLY CONNECTOR TABLE. (CONT)

CONNECTOR	CONNECTOR 4	CONNECTOR 5	CONNECTOR 6
ILL. NO.	3403	3404	3405
MS NO.	3415	3416	3417
SPEC ID	3427	3428	3429
INSERT	3439	3440	3441
DWG DES	3451	3452	3453
ACCESSORY			
ILL NO.	3463	3464	3465
MS NO.	3475	3476	3477
SPEC ID	3487	3488	3489

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CABLE ASSEMBLY CONNECTOR TABLE. (CONT)

CONNECTOR	CONNECTOR 7	CONNECTOR 8	CONNECTOR 9
ILL. NO.	3406	3407	3408
MS NO.	3418	3419	3420
SPEC ID	3430	3431	3432
INSERT	3442	3443	3444
OWG DES	3454	3455	3456
ACCESSORY			
ILL NO.	3466	3467	3468
MS NO.	3478	3479	3480
SPEC ID	3490	3491	3492

CABLE ASSEMBLY CONNECTOR TABLE. (CONT)

CONNECTOR	CONNECTOR 10	CONNECTOR 11	CONNECTOR 12
ILL. NO.	3409	3410	3411
MS NO.	3421	3422	3423
SPEC ID	3433	3434	3435
INSERT	3445	3446	3447
OWG DES	3457	3458	3459
ACCESSORY			
ILL NO.	3469	3470	3471
MS NO.	3481	3482	3483
SPEC ID	3493	3494	3495

TABLE V. MARKING REFERENCE TABLE.

REF A	REF B	REF C	REF D	REF E
4300	4301	4302	4303	4304
4305	4306	4307	4308	4309
4310	4311	4312	4313	4314
4315	4316	4317	4318	4319

MARKING REFERENCE TABLE. (CONT)

REF F	REF G	REF H	REF I	REF J
4320	4321	4322	4323	4324
4325	4326	4327	4328	4329
4330	4331	4332	4333	4334
4335	4336	4337	4338	4339

MARKING REFERENCE TABLE. (CONT)


REF K	REF L	REF M	REF N	REF O
4340	4341	4342	4343	4344
4345	4356	4347	4348	4349
4350	4351	4352	4353	4354
4355	4356	4357	4358	4359

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.


APPENDIX B

ILLUSTRATIONS


Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

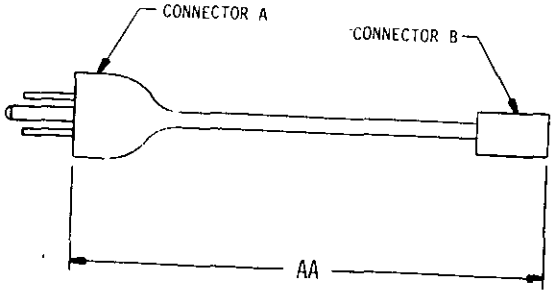

077-01-1

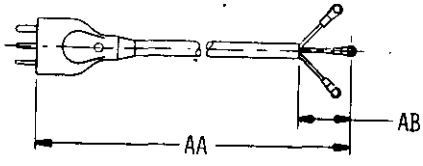


077-01-2

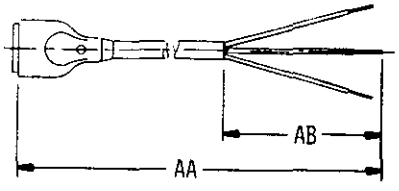


077-01-3


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

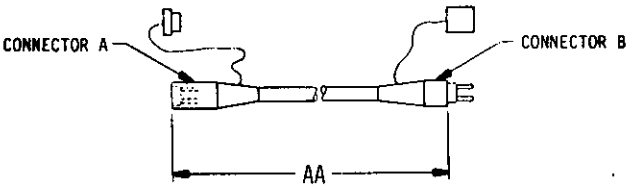

077-01-4

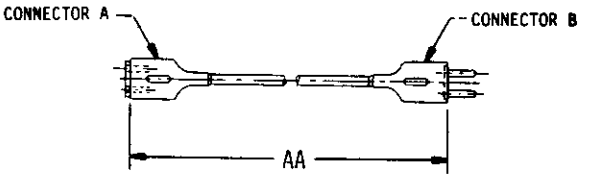


077-01-5

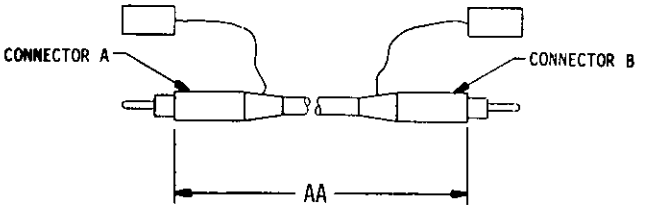


077-01-6


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

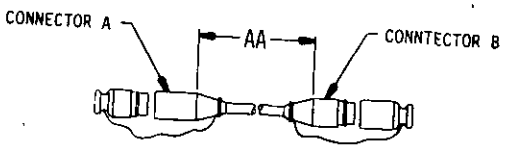

077-01-7

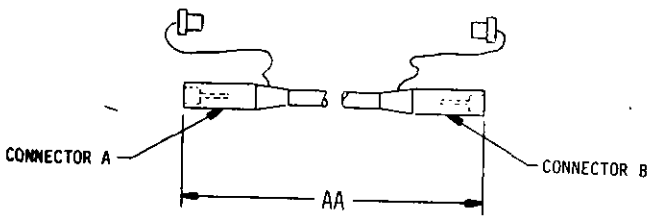


077-01-8

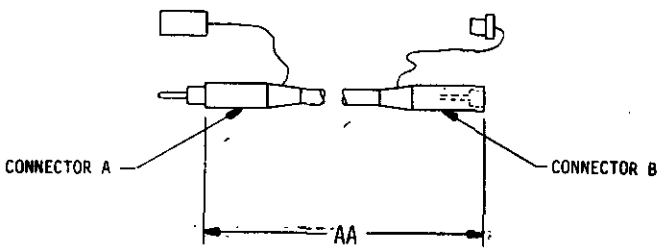


077-01-9


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

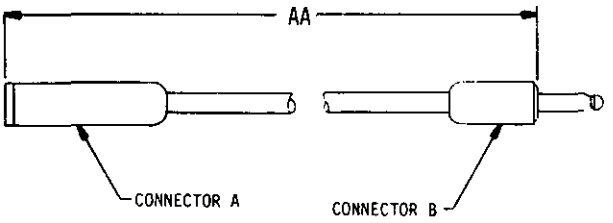

077-01-10

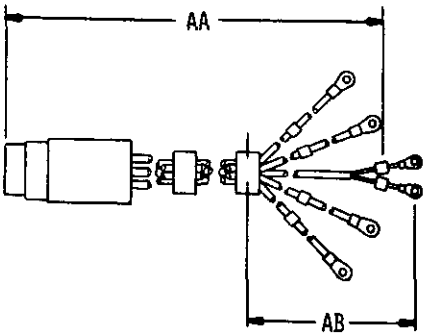


077-01-11

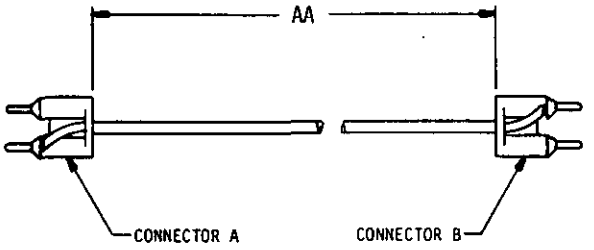


077-01-12


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

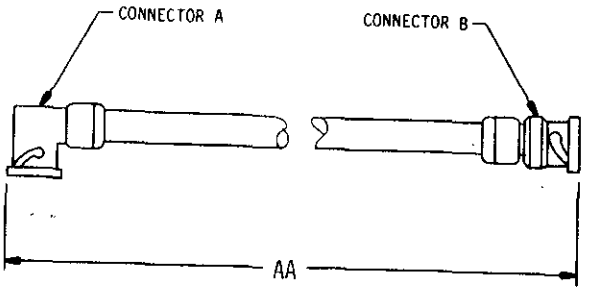

077-01-13

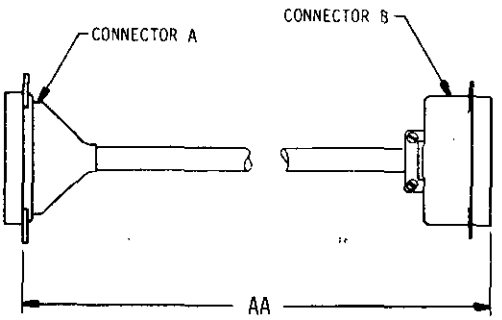


077-01-14

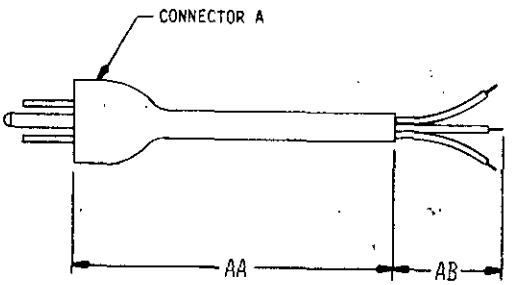


077-01-15


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

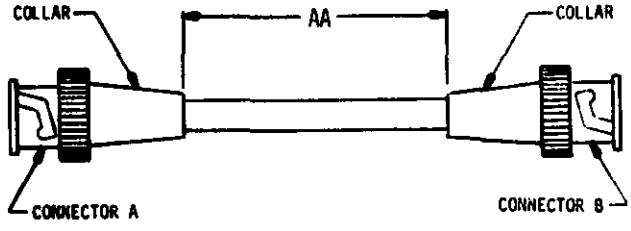

077-01-16

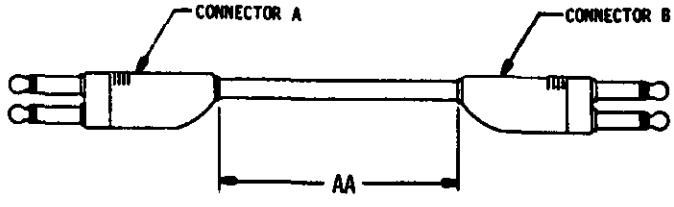


077-01-17

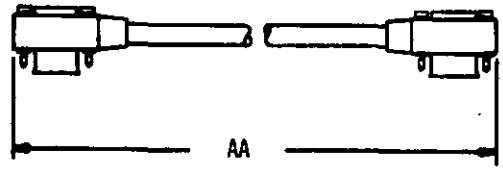


077-01-18

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

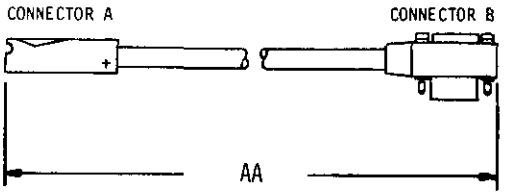



077-01-19

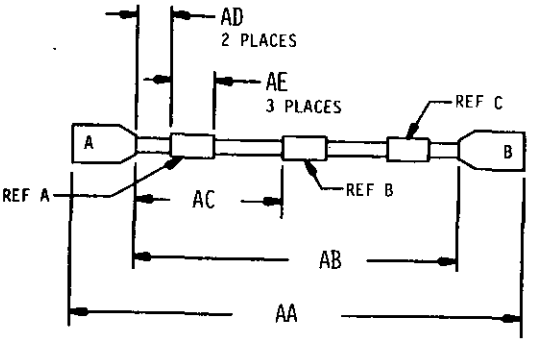

077-01-20


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

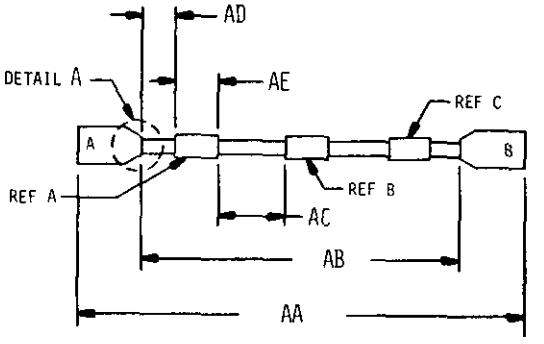




DETAIL A
TYPICAL BOTH ENDS

077-01-21

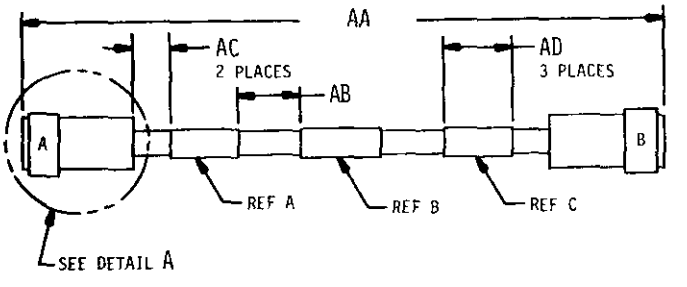





DETAIL A
TYPICAL BOTH ENDS

077-01-22

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

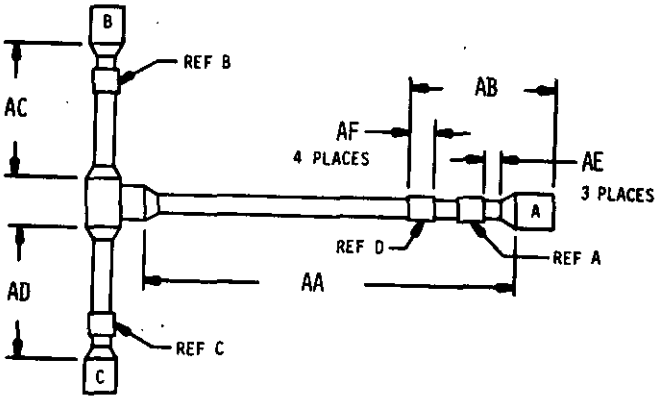

077-01-23

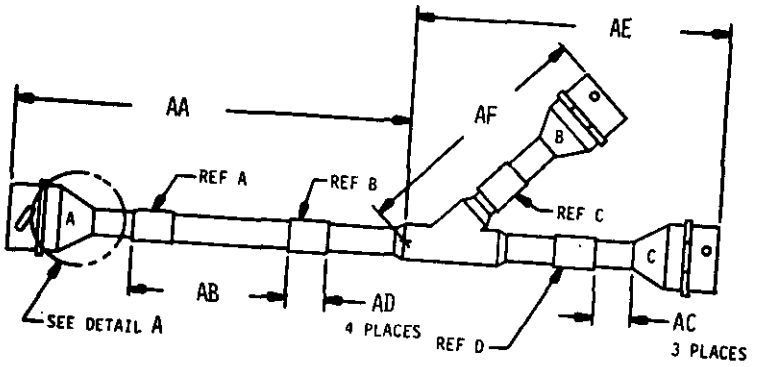





DETAIL A

077-01-24

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

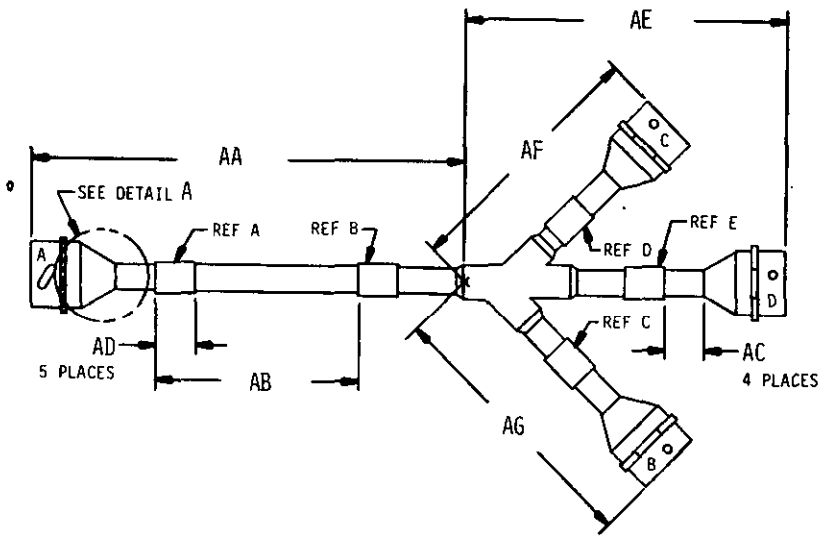





DETAIL A


077-01-25

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

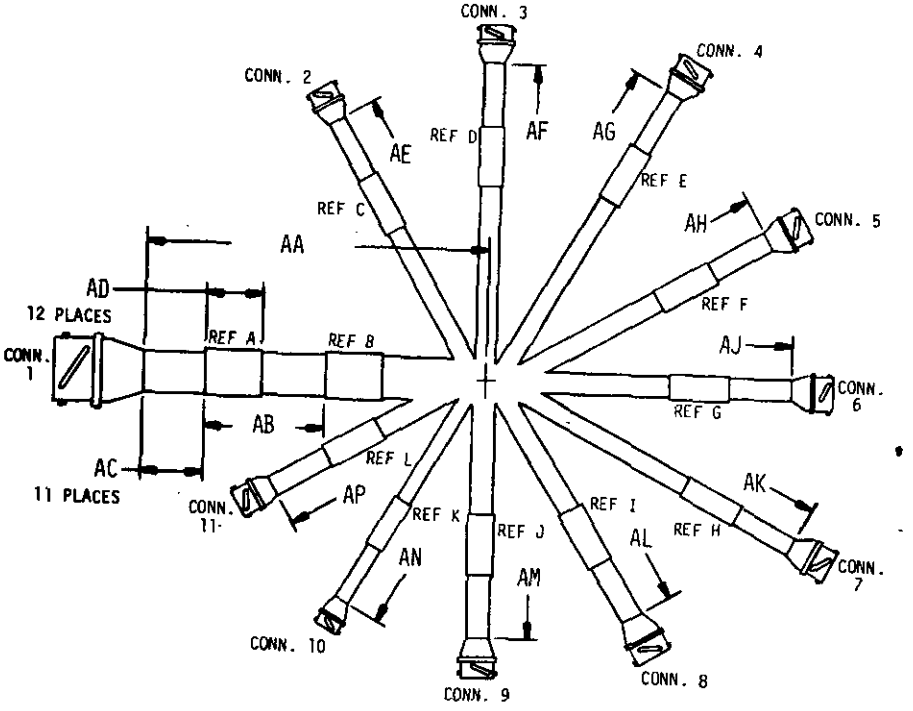

077-01-26

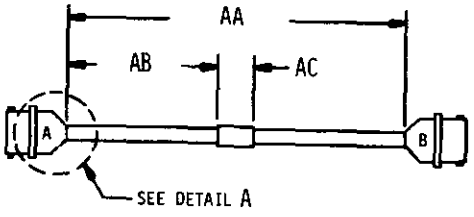





DETAIL A

077-01-27

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

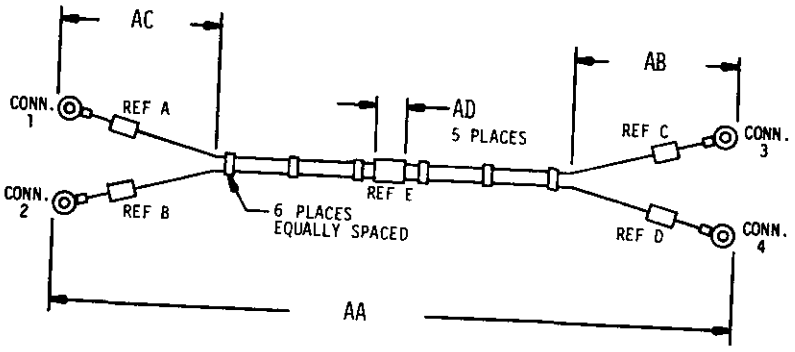


077-01-28

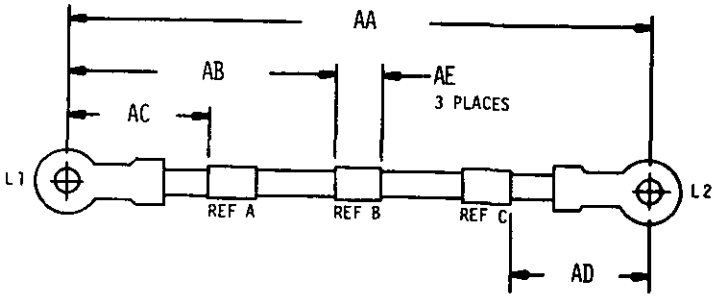


077-01-29

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

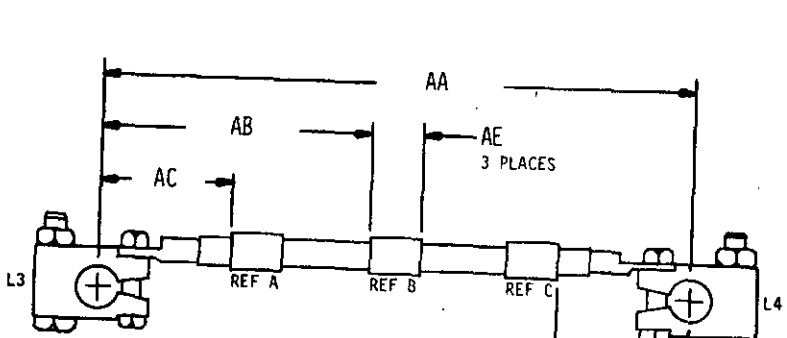


077-01-30

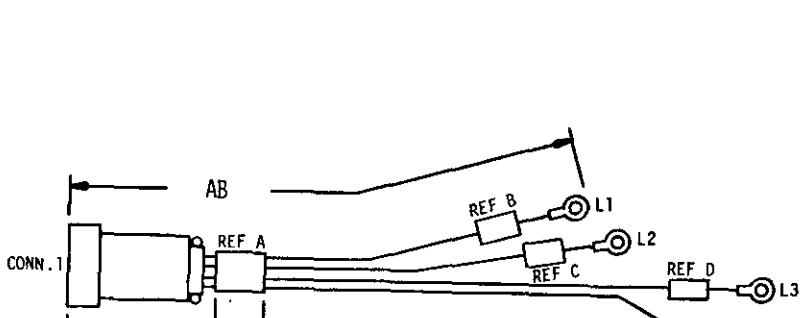


077-01-31

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

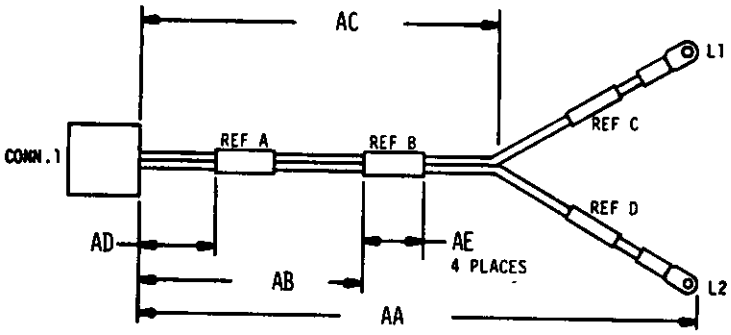


077-01-32

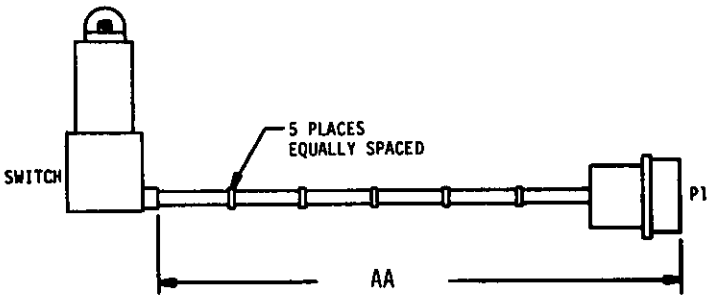


077-01-33

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

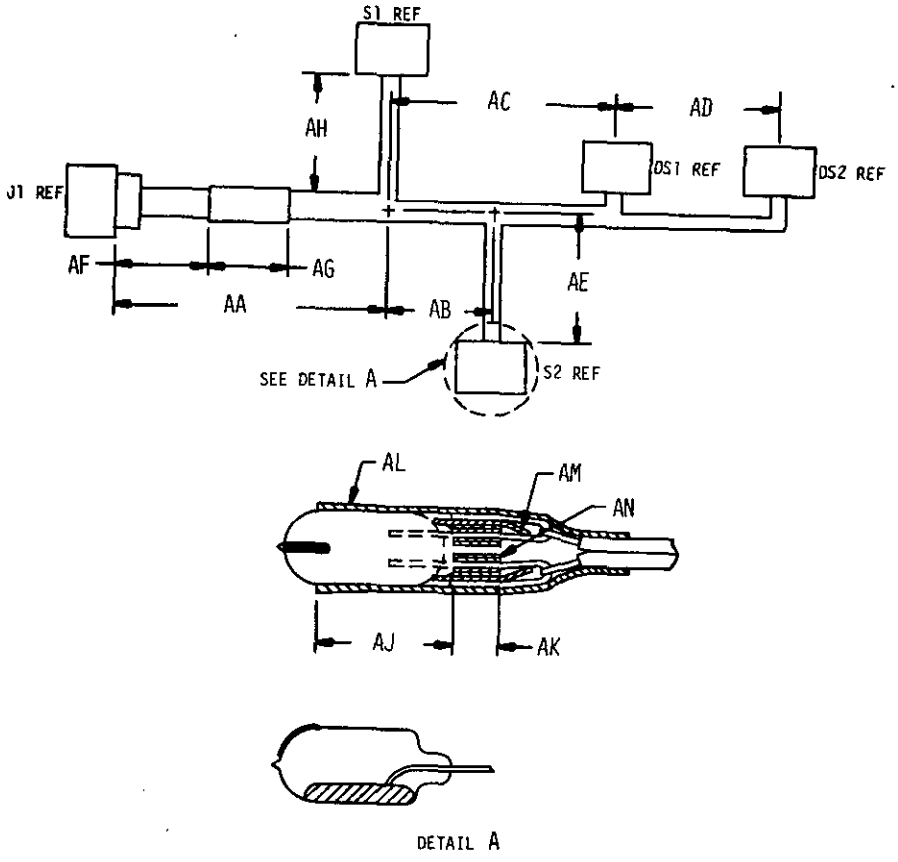



077-01-34

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

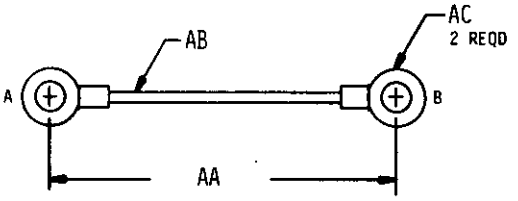

077-01-35

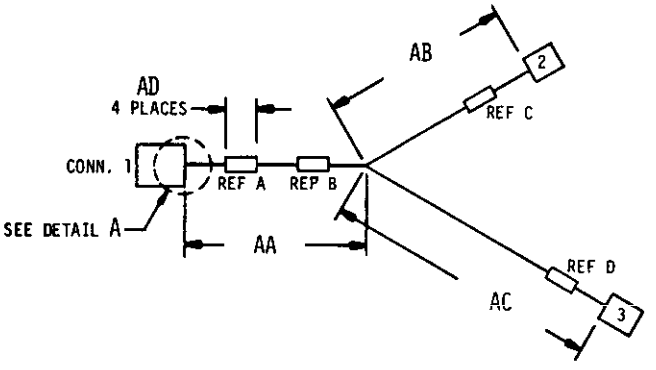





DETAIL A

077-01-36

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

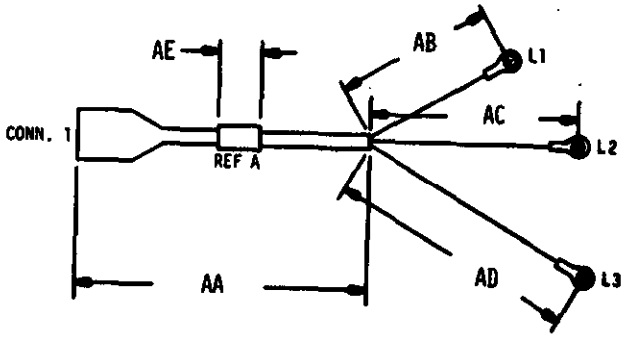


077-01-37

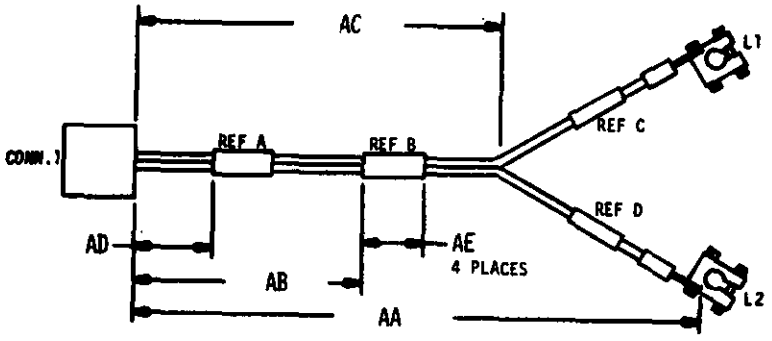


077-01-38


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

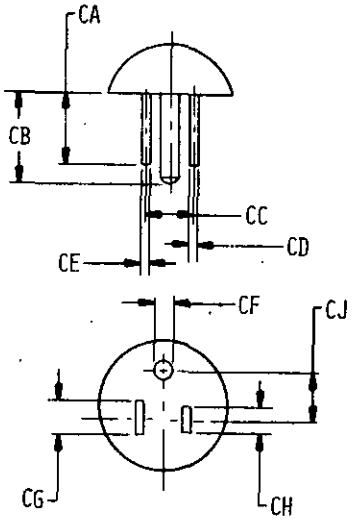

077-02-1




077-02-2

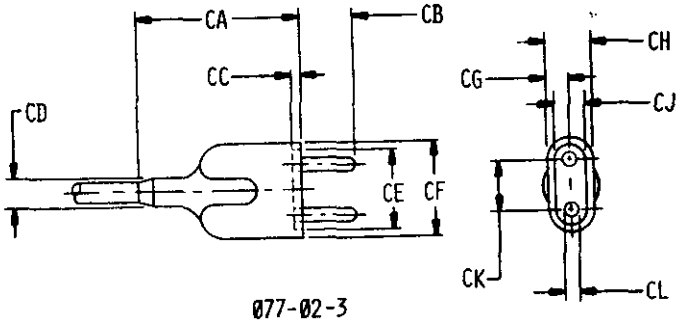


077-02-3


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

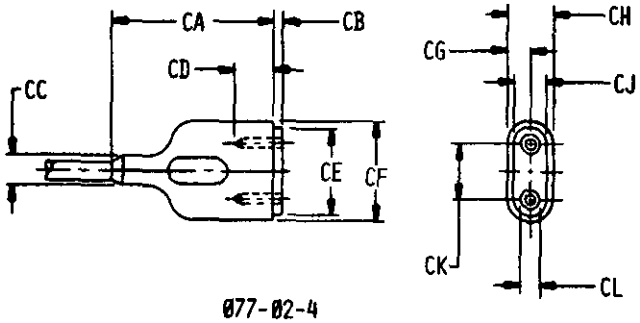

077-02-4

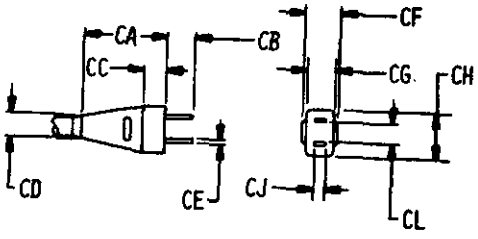


077-02-5

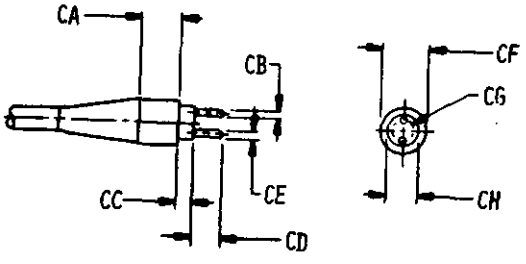


077-02-6


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

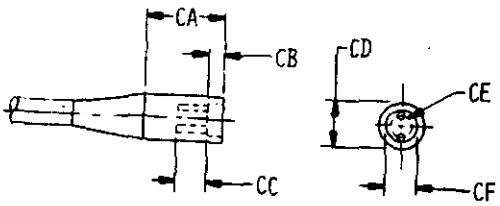

077-02-7

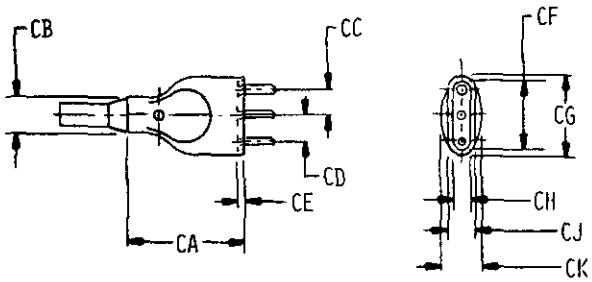


077-02-8

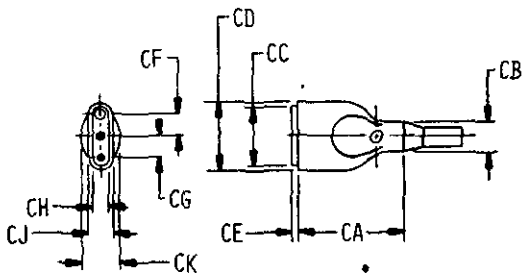


077-02-9


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

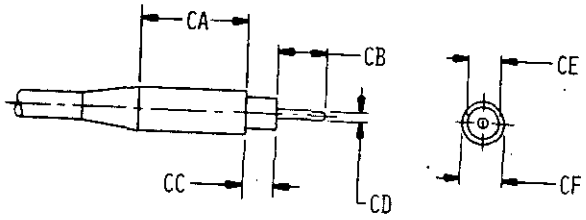

077-02-10

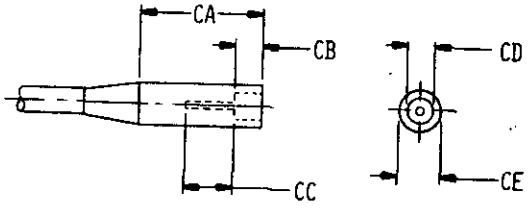


077-02-11

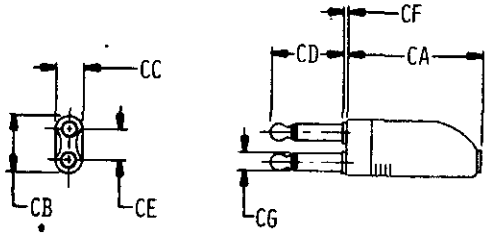


077-02-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

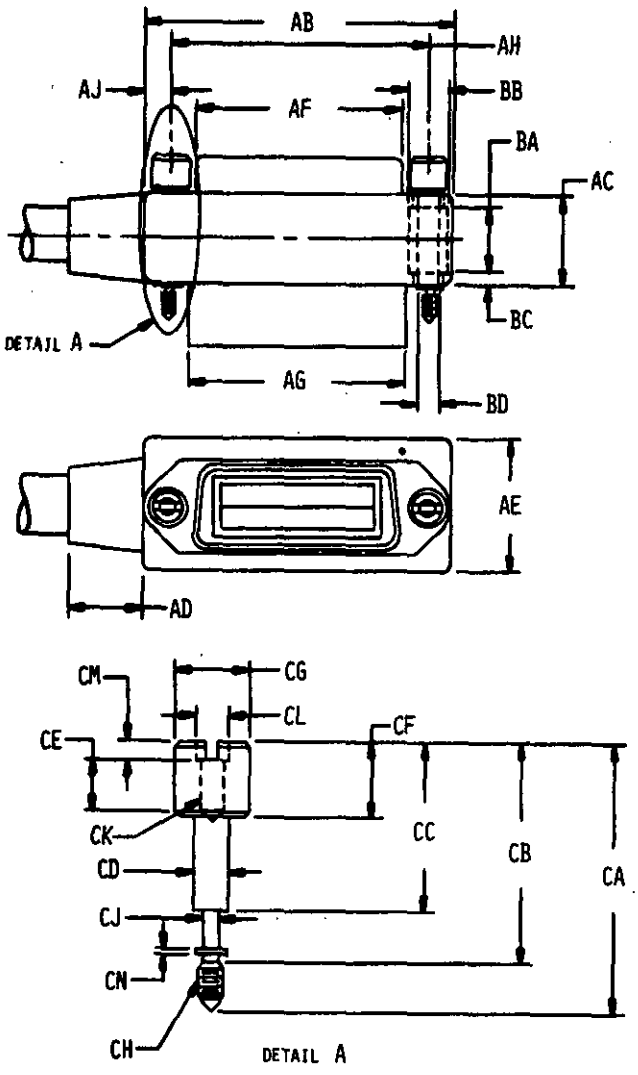

077-02-13

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

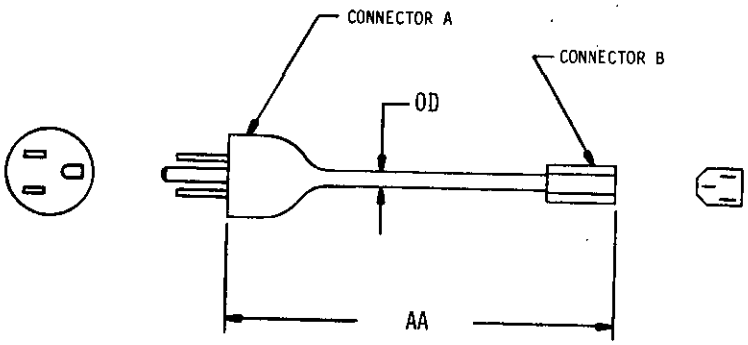

077-03-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX C

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	12	1566	18	1622	40	1786	130
0102	12	1568	18	1624	40	1788	130
0103	12	1570	18	1626	48	1710	132
0104	12	1572	18	1628	48	1752	130
0105	12	1574	18	1630	30	1764	130
0107	14	1576	18	1632	30	1766	130
0108	14	1578	24	1634	30	1768	130
0700	12	1579	24	1636	30	1778	132
0800	12	1580	34	1640	28	1786	132
1003	12	1581	24	1641	28	1788	132
1004	12	1582	34	1642	28	1800	132
1005	12	1583	34	1643	28	1806	132
1006	12	1584	24	1644	28	1810	28
1008	12	1585	34	1645	28	1812	28
1009	28	1586	24	1646	28	1814	28
1371	92	1587	34	1648	28	1816	28
1372	92	1588	24	1650	28	1950	44
1373	92	1589	36	1651	28	1952	44
1374	118	1590	36	1672	18	1954	44
1376	92	1591	24	1674	18	1956	44
1377	92	1592	36	1676	18	1958	44
1380	90	1593	24	1678	18	1960	44
1381	92	1594	24	1680	18	1962	44
1383	92	1595	36	1682	18	1964	44
1384	90	1596	36	1683	18	1966	44
1386	90	1597	36	1684	20	1968	44
1387	90	1598	36	1686	20	1970	44
1407	90	1599	36	1688	20	1972	44
1471	106	1602	38	1690	30	1974	44
1477	92	1604	38	1692	30	1976	44
1502	108	1605	38	1693	30	1978	44
1504	108	1607	38	1694	30	1979	44
1505	118	1609	38	1695	30	1982	46
1508	106	1610	38	1696	38	1984	46
1509	106	1612	38	1697	38	1992	42
1520	92	1614	38	1698	40	1993	42
1529	128	1616	38	1699	40	1994	42
1545	118	1618	38	1700	48	1995	42
1546	118	1619	38	1702	130	1998	44
1564	18	1620	48	1704	138	1999	44

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2002	46	2120	60	2284	66	2415	50
2004	46	2122	60	2286	66	2417	50
2006	46	2138	96	2287	66	2419	50
2007	46	2142	58	2288	66	2421	50
2009	48	2144	58	2289	66	2425	80
2010	48	2146	58	2291	66	2426	80
2011	48	2148	58	2292	64	2432	60
2013	48	2150	58	2294	64	2442	86
2015	48	2152	96	2296	64	2444	86
2016	48	2154	96	2302	50	2446	86
2022	46	2156	96	2305	52	2447	86
2024	46	2162	96	2306	52	2448	86
2026	46	2164	96	2307	52	2449	86
2027	46	2172	92	2308	52	2450	86
2042	50	2173	94	2309	52	2451	72
2044	50	2174	94	2322	52	2452	86
2045	50	2175	94	2324	52	2455	70
2062	48	2178	94	2326	52	2456	70
2063	48	2180	94	2328	52	2457	70
2064	48	2181	96	2330	54	2458	70
2065	48	2182	96	2332	54	2459	70
2067	48	2184	96	2352	74	2462	86
2072	56	2190	94	2354	74	2464	86
2074	56	2192	94	2355	74	2466	86
2076	56	2242	62	2357	74	2468	86
2078	56	2243	62	2362	74	2472	84
2080	56	2245	62	2364	74	2474	84
2082	56	2246	62	2372	76	2476	84
2084	56	2249	62	2374	76	2478	84
2092	54	2252	60	2375	76	2480	84
2094	54	2253	60	2377	76	2482	84
2102	58	2254	60	2379	76	2484	84
2104	58	2262	64	2382	74	2486	84
2106	58	2264	64	2384	74	2488	84
2108	58	2265	64	2402	52	2490	84
2110	58	2267	64	2404	52	2492	84
2112	58	2269	64	2405	54	2522	90
2114	58	2272	62	2407	54	2524	90
2116	60	2274	62	2412	50	2542	88
2118	60	2282	64	2414	50	2543	88

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2544	88	2705	102	3033	42	3192	114
2545	88	2707	102	3044	42	3202	116
2547	88	2708	102	3048	40	3204	116
2549	88	2709	102	3049	40	3206	116
2550	88	2710	102	3108	60	3208	116
2551	88	2722	100	3110	60	3210	116
2552	88	2724	102	3112	60	3212	116
2553	88	2842	76	3114	60	3214	116
2555	88	2843	76	3116	62	3232	114
2556	88	2844	76	3118	62	3234	114
2558	88	2845	78	3120	62	3236	116
2559	88	2846	78	3122	62	3238	116
2560	88	2847	78	3124	62	3240	116
2561	88	2849	78	3132	110	3250	118
2562	88	2851	78	3134	110	3302	124
2563	90	2858	78	3136	110	3304	124
2564	90	2860	78	3142	108	3312	124
2584	42	2872	76	3144	110	3314	124
2586	42	2874	76	3146	110	3366	74
2587	44	2876	76	3148	110	3370	124
2588	44	2932	104	3150	118	3372	124
2589	92	2933	104	3152	110	3400	137
2594	92	2934	104	3153	110	3401	137
2662	98	2935	104	3155	112	3402	137
2664	98	2936	104	3156	112	3403	137
2666	98	2942	102	3157	112	3404	137
2667	98	2944	104	3158	112	3405	137
2669	100	2945	104	3159	112	3406	138
2670	100	2946	104	3161	112	3407	138
2672	100	2947	106	3163	112	3408	138
2674	100	3007	106	3165	112	3409	138
2676	100	3009	106	3167	112	3410	138
2678	100	3010	40	3169	112	3411	138
2682	98	3011	108	3171	112	3412	137
2684	98	3012	108	3186	114	3413	137
2686	98	3013	42	3187	114	3414	137
2688	98	3014	108	3188	114	3415	137
2689	98	3015	42	3189	114	3416	137
2702	102	3029	42	3190	114	3417	137
2704	102	3031	42	3191	114	3418	138

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3419	138	3459	138	3506	118	3592	126
3420	138	3460	137	3508	120	3594	126
3421	138	3461	137	3510	120	3596	126
3422	138	3462	137	3512	120	3598	126
3423	138	3463	137	3514	120	3800	27
3424	137	3464	137	3516	120	3801	27
3425	137	3465	137	3518	120	3802	27
3426	137	3466	138	3520	120	3803	27
3427	137	3467	138	3522	120	3804	27
3428	137	3468	138	3524	120	3805	27
3429	137	3469	138	3526	120	3806	27
3430	138	3470	138	3528	120	3807	27
3431	138	3471	138	3530	120	3808	27
3432	138	3472	137	3532	122	3809	27
3433	138	3473	137	3534	122	3810	27
3434	138	3474	137	3536	122	3811	27
3435	138	3475	137	3538	122	3812	27
3436	137	3476	137	3540	122	3813	27
3437	137	3477	137	3542	122	3814	27
3438	137	3478	138	3544	122	3815	27
3439	137	3479	138	3546	122	3816	27
3440	137	3480	138	3548	122	3817	27
3441	137	3481	138	3550	122	3818	27
3442	138	3482	138	3552	122	3819	27
3443	138	3483	138	3554	122	3820	27
3444	138	3484	137	3556	124	3821	27
3445	138	3485	137	3558	124	3822	27
3446	138	3486	137	3560	124	3823	27
3447	138	3487	137	3562	124	3824	27
3448	137	3488	137	3564	124	3825	27
3449	137	3489	137	3572	126	3826	27
3450	137	3490	138	3574	126	3827	27
3451	137	3491	138	3576	126	3828	27
3452	137	3492	138	3578	126	3829	27
3453	137	3493	138	3580	126	3850	27
3454	138	3494	138	3582	126	3851	27
3455	138	3495	138	3584	126	3852	27
3456	138	3500	118	3586	126	3853	27
3457	138	3502	118	3588	126	3854	27
3458	138	3504	118	3590	126	3855	27

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3856	27	3896	27	3976	57	4021	135
3857	27	3897	27	3977	57	4022	135
3858	27	3898	27	3978	57	4023	135
3859	27	3899	27	3979	57	4024	135
3860	27	3900	27	3980	57	4025	135
3861	27	3901	27	3981	57	4026	135
3862	27	3902	27	3982	57	4027	135
3863	27	3903	27	3983	57	4028	135
3864	27	3904	27	3984	57	4029	135
3865	27	3905	27	3985	57	4030	135
3866	27	3906	27	3986	57	4031	135
3867	27	3907	27	3987	57	4033	135
3868	27	3908	27	3988	57	4034	135
3869	27	3909	27	3989	57	4035	135
3870	27	3950	57	3990	57	4036	135
3871	27	3951	57	3991	57	4037	135
3872	27	3952	57	3992	57	4038	135
3873	27	3953	57	3993	57	4039	135
3874	27	3954	57	3994	57	4040	135
3875	27	3955	57	4000	135	4041	135
3876	27	3956	57	4001	135	4042	135
3877	27	3957	57	4002	135	4043	136
3878	27	3958	57	4003	135	4044	136
3879	27	3959	57	4004	135	4045	136
3880	27	3960	57	4005	135	4046	136
3881	27	3961	57	4006	135	4047	136
3882	27	3962	57	4007	135	4048	136
3883	27	3963	57	4008	135	4049	136
3884	27	3964	57	4009	135	4050	136
3885	27	3965	57	4010	135	4051	136
3886	27	3966	57	4011	135	4052	136
3887	27	3967	57	4012	135	4053	136
3888	27	3968	57	4013	135	4054	136
3889	27	3969	57	4014	135	4055	136
3890	27	3970	57	4015	135	4056	136
3891	27	3971	57	4016	135	4057	136
3892	27	3972	57	4017	135	4058	136
3893	27	3973	57	4018	135	4059	136
3894	27	3974	57	4019	135	4060	136
3895	27	3975	57	4020	135	4061	136

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4062	136	4103	135	4143	136	4183	136
4063	136	4104	135	4144	136	4184	136
4064	136	4105	135	4145	136	4185	136
4065	136	4106	135	4146	136	4186	136
4066	136	4107	135	4147	136	4187	137
4067	136	4108	135	4148	136	4188	137
4068	136	4109	135	4149	136	4189	137
4069	136	4110	135	4150	136	4190	137
4070	136	4111	135	4151	136	4191	137
4071	136	4112	135	4152	136	4192	137
4072	136	4113	135	4153	136	4193	137
4073	136	4114	135	4154	136	4194	137
4074	136	4115	135	4155	136	4195	137
4075	136	4116	135	4156	136	4196	137
4076	136	4117	135	4157	136	4197	137
4077	136	4118	135	4158	136	4198	137
4078	136	4119	135	4159	136	4200	135
4079	136	4120	135	4160	136	4201	135
4080	136	4121	135	4161	136	4202	135
4081	136	4122	135	4162	136	4203	135
4082	136	4123	135	4163	136	4204	135
4083	136	4124	135	4164	136	4205	135
4084	136	4125	135	4165	136	4206	135
4085	136	4126	135	4166	136	4207	135
4086	136	4127	135	4167	136	4208	135
4087	137	4128	135	4168	136	4209	135
4088	137	4129	135	4169	136	4210	135
4089	137	4130	135	4170	136	4211	135
4090	137	4131	135	4171	136	4212	135
4091	137	4132	135	4172	136	4213	135
4092	137	4133	135	4173	136	4214	135
4093	137	4134	135	4174	136	4215	135
4094	137	4135	135	4175	136	4216	135
4095	137	4136	135	4176	136	4217	135
4096	137	4137	135	4177	136	4218	135
4097	137	4138	135	4178	136	4219	135
4098	137	4139	135	4179	136	4220	135
4100	135	4140	135	4180	136	4221	135
4101	135	4141	135	4181	136	4222	135
4102	135	4142	135	4182	136	4223	135

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4224	135	4264	136	4305	138	4345	138
4225	135	4265	136	4306	138	4347	138
4226	135	4266	136	4307	138	4348	138
4227	135	4267	136	4308	138	4349	138
4228	135	4268	136	4309	138	4350	138
4229	135	4269	136	4310	138	4351	138
4230	135	4270	136	4311	138	4352	138
4231	135	4271	136	4312	138	4353	138
4232	135	4272	136	4313	138	4354	138
4233	135	4273	136	4314	138	4355	138
4234	135	4274	136	4315	138	4356	138
4235	135	4275	136	4316	138	4357	138
4236	135	4276	136	4317	138	4358	138
4237	135	4277	136	4318	138	4359	138
4238	135	4278	136	4319	138	4681	118
4239	135	4279	136	4320	138	4682	118
4240	135	4280	136	4321	138	4684	108
4241	135	4281	136	4322	138	4685	108
4242	135	4282	136	4323	138	4686	108
4243	136	4283	136	4324	138	4715	112
4244	136	4284	136	4325	138	4717	72
4245	136	4285	136	4326	138	4754	80
4246	136	4286	136	4327	138	4755	80
4247	136	4287	137	4328	138	4756	80
4248	136	4288	137	4329	138	4760	78
4249	136	4289	137	4330	138	4761	78
4250	136	4290	137	4331	138	4762	80
4251	136	4291	137	4332	138	4765	106
4252	136	4292	137	4333	138	4766	106
4253	136	4293	137	4334	138	4770	106
4254	136	4294	137	4335	138	4772	106
4255	136	4295	137	4336	138	4773	106
4256	136	4296	137	4337	138	4788	82
4257	136	4297	137	4338	138	4790	84
4258	136	4298	137	4339	138	4793	84
4259	136	4300	138	4340	138	4795	82
4260	136	4301	138	4341	138	4798	82
4261	136	4302	138	4342	138	4799	82
4262	136	4303	138	4343	138	4803	82
4263	136	4304	138	4344	138	4885	82

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4813	82	6308	68				
4815	82	6310	68				
4849	68	6359	90				
4858	72	6369	12				
4854	72	6372	130				
4855	72	6790	32				
4856	70	6791	32				
4859	68	6792	32				
4861	72	6793	32				
4867	72	6794	32				
4869	72	6796	32				
4870	72	6798	32				
4874	70	6799	32				
4875	70	6801	32				
4878	104	6803	32				
4884	68	6870	128				
4885	68	6873	12				
4891	68	6874	14				
4894	66	6941	14				
4897	72	6942	14				
4900	68	6991	130				
4902	68	6992	130				
4906	66	6993	130				
4908	66	6994	130				
4942	128	6995	130				
4943	128	7021	34				
4944	128	7022	34				
4950	22	7023	34				
5008	72	7024	34				
5052	16	7301	16				
5054	16	7302	16				
5060	16	7572	20				
5061	16	7573	20				
5062	16	7574	20				
5063	16	7576	20				
5068	16	7577	20				
5069	16	7578	20				
5209	128	7580	22				
6267	72	7629	130				
6288	68	7630	130				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Additional Part Marking	130
Additional Requirements	128
Altitude	32
Altitude Immersion	40
Altitude Rating	16
Aperture Cards Required	14
Applicable Documents	132
Attenuation	42
Banding	30
Band Tensile Strength	46
Base Document	12
Cable Accessoreis	28
Cable Pull-Out	48
Cable Seal Flexing	50
Cable Stock Requirements	24
Circuit Resistance	54
City, State, Zip	12
Classification	18
Cold Bend	58
Company Name/Command	12
Conductor Colors and Interface Connections	24
Conductors	34
Configuration	20
Connector Requirements	38
Corona	60
Covers	28
Contract Number/Office Symbol	12
Control, Source	12
Control, Specification	14
Crosstalk	62
Current Overload	64
Date	12
Design and Construction	24
Dielectric Withstanding Voltage at Reduced Barometric Pressure	66
Dielectric Withstanding Voltage at Sea Level	70
Durability	74
Explosive Atmosphere	74
Finishes	22
Fluid Immersion	76
Format	12

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Fungus	78
Government Design Activity FSCM	12
Grounding Ferrules	28
Humidity	82
Hydrostatic Pressure	86
Illustrations	22
Impedance	88
Insulation Resistance	90
Interconnection	24
Jacket	24
Materials	22
Mating and Unmating Forces	92
Mechanical Abuse	98
Metals	22
Mounting Hardware	128
Nomenclature	132
Notes	132
Ozone Exposure	100
Packaging	132
Part Marking	130
Part Number	14
Part Number Cross-Reference	132
Phone Number	12
Quality Assurance Provisions	132
Ratings	18
Requester FSCM	12
Requester's Name	12
Revision of AEDPS Document (Number)	14
RF High Potential Withstanding Voltage	102
Salt Spray	104
Scope	14
Shield	24
Shock, Specified Pulse	106
Soldering	30

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Source Table	14
Storage Conditions	128
Street/Building	12
Superseded Document	132
System Application	12
Tabulated Characteristics	22
Temperature	32
Temperature-Altitude	108
Temperature Cycling	110
Temperature Life	114
Temperature Rating	16
Terminal Lug Requirements	26
Torque	114
Units of Measure	14, 20
Vibration	118
Voltage Standing Wave Ratio	124
Weight	34
Workmanship	128

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-99A(MI), dated 09 Feb 1979 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-99A(MI), dated 09 Feb 1979 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander,
U.S. Army Missile R & D Command
ATTN: DRDMI-ESD
Redstone A rsenal, Alabama 35809

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.