NOT MEASUREMENT SENSITIVE

MIL-STD-35E
24 APRIL 1991

SUPERSEDING
DOD-STD-35D(MI)
17 MARCH 1978

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

BASIC

AMSC A6043

AREA EGDS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://apps.dtic.mil/ | Downloaded: 2026-03-26T07:07:23Z
Check the source to verify that this is the current version before use.

FOREWARD

1. This Military Standard is approved for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Command, ATTN: AMSMI-RD-SE-TD-ST, Redstone Arsenal, Alabama 35898-5270, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

3. Current documentation practices throughout the Department of Defense (DoD) lead to the preparation of an immense number of item procurement specifications and control drawings for military application. Measures such as standardization screening, item entry control actions, publication of military specifications, and adoption of industry specifications have not been adequate to stem the proliferation of nonstandard parts documents, coupled with the lack of visibility of the documents, result in the duplication of inventory items, associated control records, and procedures.

4. The Automated Engineering Document Preparation Systems (AEDPS) helps reduce this proliferation. AEDPS utilizes the fact that major features and characteristics of most parts, that need to be covered by a procurement document, are defined by existing DODISS documents. AEDPS provides computer generated procurement documents that specify exceptions to physical and functional characteristics depicted within existing DODISS or industry documents.

5. The Automated Engineering Document Preparation System (AEDPS) is a system for preparing, through the use of a computer, Military Specification Exceptions (MSEs). An MSE is a procurement document containing requirements of a DoD or industry specification or standard, modified by exceptions.

6. MSEs are used to eliminate locally prepared and controlled procurement documents such as purchase descriptions, source and specification control drawings and selected item drawings. This standard contains a description of AEDPS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CONTENTS

PARAGRAPH		PAGE
1.	SCOPE	1
1.1	General	1
1.2	Purpose	1
1.3	Organization	1
1.3.1	Dash-numbered parts dated prior to January 1977	1
1.4	Over-specifying	1
1.5	Tailoring	1
1.5.1	Method of submitting requirements	1
2.	REFERENCED DOCUMENTS	7
2.1	Government documents	7
2.1.1	Specifications, standards, and handbooks	7
2.2	Other publications	7
2.3	Order of precedence	8
3.	DEFINITIONS	9
3.1	Automated data base	9
3.2	Base document	9
3*3	Characteristic code	9
3.4	Characteristic name	9
3.5	Characteristic value	9
3.6	Dash-numbered part book	9
3.7	Keyword code index (KCI)	9
3.8	Military specification exception document	9
3.9	Requester	9
3.10	Requester's number	9
3.11	Specification requirements list	9
3.12	SRS control number	9
3.13	Standard pargraph	10
3.14	Title code	10
3.15	User	10
3.16	Acronyms	10
4.	GENERAL REQUIREMENTS	11
4.1	Concept	11
4.2	MSE formats	11
4.2.1	Six-section MSE format	11
4.2.2	Single-section MSE format	11
4.3	Request for MSE	11
4.3.1	Subject matter	11
4.4	Base document	13
4.5	Document number	13
4.5.1	Federal specification	13
4.5.2	Federal standard	14
4.5.3	Military specification	14
4.5.4	Military standard	14
4.5.5	Industry standard	14
4.5.6	Stem number of base document	14
4.5.7	Serial number	14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CONTENTS (cont)

PARAGRAPH		PAGE
4.5.8	Revision letter	14
4.6	Part number	14
4.6.1	Limited tabulation	15
4.6.2	MIL-M-38510	15
4.7	Preliminary MSE	16
4.8	Draft MSE	16
4.8.1	Document date	16
4.9	MSE revision	16
4.10	MSE acceptance	16
5.	DETAIL REQUIREMENTS	17
5.1	Introduction	17
5.2	Specification Requirements Sheets (SRS)	17
5.3	Writing methodology	17
5.3.1	Abbreviations	18
5.3.2	Tolerance	18
5.3.3	Prefixes	18
5.3.4	Temperature (zero or greater)	19
5.3.5	Temperature (less than zero)	19
5.3.6	Fractions	19
5.3.7	Exponential values	19
5.4	Tables	20
5.4.1	Use of tables	20
5.4.2	Column width	20
5.4.3	Source table	20
5.4.4	Suffix number	20
5.4.5	Table value entry	20
5.5	Multi-line characteristic value	22
5.6	Mandatory requirements	23
5.6.1	Title code (columns 1 through 6)	23
5.6.2	Requester's number (columns 7 through 12)	23
5.6.3	Requester's name	23
5.6.4	Company name/command	24
5.6.5	Street/building	24
5.6.6	City, state, zip code	24
5.6.7	Phone number	24
5.6.8	Requester's CAGE CODE	24
5.6.9	Contract number/office symbol	24
5.6.10	Base document	24
5.6.11	System application	24
5.6.12	Government design activity CAGE CODE	24
5.6.13	Format	24
5.6.13.1	Six-section MSE format	24
5.6.13.2	Single-section MSE format	25
5.7	Units of measure	25
5.7.1	Inch-pound	25
5.7.2	SI	25
5.8	Specification control MSE	25
5.9	Source Control MSE	25

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CONTENTS (cont)

PARAGRAPH		PAGE
5.10	Procurement source(s)	26
5.11	Revision of existing MSE	26
5.12	Configuration	26
5.12.1	Illustrations	26
5.12.1.1	Obtaining illustrations	26
5.12.2	Dimensions	27
5.12.2.1	Schematics and nondimensioned illustrations	27
5.13	Materials	27
5.13.1	Characteristic value entry	27
5.13.2	Material name	29
5.13.3	Material documents	29
5.13.4	Material table notes	29
5.14	Finishes	29
5.15	Tabulation	29
5.15.1	Using the tabulated characteristics table	29
5.16	Applicable documents	29
5.16.1	Automatic MSE data	30
5.16.2	Manual	31
5.16.3	Applicable documents table	31
5.16.3.1	Federal specifications	31
5.16.3.2	Other applicable documents	31
5.16.3.3	Revision letters and specification sheet numbers	31
5.16.3.4	Spaces within document identifier	31
5.17	Nomenclature	32
5.18	Additional write-in characteristics	32
5.18.1	Additional requirements	32
5.18.2	Additional part marking	32
5.18.3	Additional quality assurance previsions	32
5.18.4	Additional packaging requirements	32
5.18.5	Additional notes	33
5.19	Superseded document	33
5.20	Keyword Code Index (KCI)	33
5.20.1	KCI characteristic name punctuation	33
5.20.2	Interrelationship of KCI characteristic names	33
5.20.3	Asterisk	34
5.20.4	Lead-in statements	36
5.21	Edit routine	36
6.	NOTES	37
6.1	Intended use	37
6.2	Issue of DoDDIS	37
6.3	Data requirements	37
6.4	Subject term (keyword) listing	37
6.5	Changes from previous issue	37

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

FIGURES PAGE

1. Requester simplified flow chart 12
2. Example of MSE paragraph completion 13
3. Tabulated characteristics depicted in a multi-item MSE. 15
4. Examples of part numbers with base documents 15
5. Alpha-numeric characters 17
6. Example of tolerance characteristic value 18
7. Example of prefixes used as decimal multipliers 18
8. Example of temperature values 19
9. Example of a decimal characteristic value 19
10. Example of an exponential characteristic value 19
11. Example of SRS entry from source table 20
12. Example of MSE source table 21
13. Example of entries wider than column width of table 21
14. Example of MSE print of figure 13 SIRS 21
15. Example of a multi-line characteristic value.. 22
16. Example of MSE print of figure 15 SW.. 22
17. Example of mandatory management data entered on an SRS. 23
18. Example of a government activity symbol entered on an SRS. 24
19. Example of specification control statement 25
20. Example of source control statement 26
21. Example of illustration number entered on SIRS 26
22. Example of a dimensioned illustration 27
23. Example of material table entries 28
24. Example of material table printed in a ME 28
25. Example of tabulated characteristics table entry 30
26. Example of tabulated characteristics printed in MSE 30
27. Example of applicable documents entered on SRS 31
28. KCI indentation format 34,193
29. Use of a KCI characteristic name ending with an underline 35
30. Example of "X" and value entries 36
31. Example of first article inspection table entries 40
32. Example of MSE print of figure 31 SW 41

ENCLOSURES PAGE

E-1 Example 62 from MIL-STD-35C 192
E-2 KCI indentation format 193

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

TABLES PAGE

1. AEDPS data base titles and dash-numbered parts 2
II. Applicable documents 106
111. Dimension/tabulation candidates 108
Iv. Tabulated characteristics. 111
v. Source 123
VI. Material 143
VII. Finish 144
VIII . Mounting hardware 145
Ix. Ingredient 146
x. Performance characteristics 147
XI. Modification to qualification inspection 148
XII . Qualification inspection 149
XIII. Modification to first article inspection 150
XIV. Modification to first article inspection 151
xv. First article inspection 152
XVI. Modification to group A inspection 153
XVII. Group A inspection 154
XVIII . Modification to group B inspection 156
XIX. Group B inspection 157
xx* Modification to group C inspection 158
XXI . Group C inspection 159
XXII . Modification to group D inspection 160
XXIII Group D inspection 161
XXIV. 100 percent inspection 162
xxv. Superseded document 164
XXVI . Part number cross-reference. 165
XXVII. Nomenclature 167

APPENDICES PAGE

A Keyword Code Index (KCI) and standard paragraph 38
B Tables 105
c Six-Section MSE 169
D Single-Section ME 179
E Differences between MIL-STD-35E and MIL-STD-35C 189
F The applicability matrix 201
G Data 205
H Characteristic code index... 206
Index 210

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

INTENTIONALLY LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This standard prescribes the requirements for the preparation of Military Specification Exceptions (MSEs) and provides a description of the Automated Engineering Document Preparation System (AEDPS).

1.2 Purpose. This military standard provides to the design activity or contractor the necessary information for the preparation of a Specification Requirement Sheet (SRS) which will result in the generation of a (MSE) by automated data processing.

1.3 Organization. This standard is organized around the generic parts listed in Table I. All parts of this standard are identified as MIL-STD-35 followed by a dash and a sequential number. Each dash-numbered part of this standard is applicable to one or more generic parts and furnishes instructions to be used when preparing a request for a MSE.

1.3.1 Dash-numbered parts dated prior to January 1977. Refer to Appendix E for instructions on the use of this standard with dash-numbered parts published prior to January 1977.

1.4 Over-specifying. Requirements and tests not essential for proper identification, operation, or quality assurance should be omitted. Many non-standard items become cost prohibitive through over-specifying. When requirements and tests in the base document meet desired criteria, additional parameters which are not mandatory shall not be used.

1.5 Tailoring. This standard is imposed in full. Tailoring is accomplished by the proper application based on program life cycle and type designation. The application guide in Appendix F may be used in determining the proper application of this standard.

1.5.1 Method of submitting requirements. The SRS is the preferred vehicle for specifying and submitting requirements for the generation of a MSE. However, the contractor may select one of the other methods set forth in paragraph 4.3 of this standard.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. AEDPS data base titles and dash-numbered parts

AUTOMATED DATA BASE TITLES	MIL-STD-35 DASH-NUMBERED PART
Actuators, Electromechanical, Linear	-73
Actuators, Electromechanical, Rotary	-72
Actuators, Explosive	-74
Adhesives	-78A
Amplifiers	-103
Antennas	-43
Attenuators, Fixed and Variable	-79A
Bands, Decals, Markers and Plates	- 110A
Batteries	-39A
Bearings	-24A
Belts, Transmission and Conveyor	-80
Bolts and Studs	-31A
Cable Assemblies, Electrical	-99A
Cables, Coaxial	-68A
Cables, Cord	-67A
Cables, Fiber Optic	-119
Cables, Special Purpose	-141
Cables, Wire	-139
Capacitors, Fixed	-4C
Capacitors, Variable	-98A
Circuit Breakers	-30A
Clamps, Hardware	-114
Coils	-28A
Connector Accessories	-91A
Connectors, Adapters, Electrical	-53A
Connectors, Circular, Electrical	-65A
Connectors, Coax, Electrical	-134
Connectors, Jack, Plug and Test Point	-107A
Connectors, PC, Electrical	-66A
Connectors, Power Electrical	-135
Connectors, Rectangular, Electrical	-69A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. AEDPS data base titles and dash-numbered parts (Cent)

AUTOMATED DATA BASE TITLES	MIL-STD-35 DASH-NUMBERED PARTS
Containers	-81A
Converters and Inverters	-82A
Counters, Reciprocating and Rotating	-106A
Crystal Units, Quartz	-38A
Cylinders, Actuating Linear	-126
Delay Lines, Electronic	-132
Displays, Electro-optical	-125
Dummy Loads	-84A
Eyelets, Ferrules and Grommets	-121
Fans and Impellers	-85A
Fasteners	-23A
Filters, Electronic	-25A
Filters, Mechanical	-41A
Fittings and Couplings	-20C
Fuseholders	-llC
Fuses	-10C
Gages, Hydraulic, Pneumatic and Vacuum	-93A
Gears	-49A
Heat Sinks	-115
Holders, Supports and Brackets (Crystal)	-87
Hose and Tubing, Flexible	-21A
Indicators, Pointer	-109
Inductors	-37A
Inserts	-34A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE 1. AEDPS data base titles and dash-numbered parts (Cont)

AUTOMATED DATA BASE TITLES	MIL-STD-35 DASH-NUMBERED PARTS
Insulation, Electrical	-lllB
Insulation, Thermal and Acoustical	-118
lnsulators, Electrical	-122
Knobs, Dials, Pointers	-88A
Lampholders	-86A
Lamps	-52A
Lenses, Filters and Mirrors, Optical	-120
Lubricants, Oil and Grease	-112
Meters, Pointer	-12A
Meters, Flow	-130
Microcircuit Devices	-16C
Microwave/Waveguide Components	-75A
Motor-Generator Sets and Dynamotors	-83
Motors, AC and DC	-89A
Networks, Pulse Forming	-35
Networks, Resistor	-97A
Nuts	-22A
Oscillators	-94A
Paint, Varnish, Lacquer and Enamel	-90
Pins and Keys	-32B
Pipe	-18
Potting Compounds	-116
Printed Wiring, Flexible	-102
Pulleys	-50A
pumps, Hydraulic, pneumatic and Vacuum	-95

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE 1. AEDPS data base titles and dash-numbered parts. (Cont)

AUTOMATED DATA BASE TITLES	MIL-STD-35 DASH-NUMBERED PARTS
Regulators and Nonpowered Valves (Hydraulic, Pneumatic and Vacuum)	-100A
Regulators, Current and Voltage, AC and DC	-96
Relays	-8B
Relays, Solid-State	-101A
Resistors, Fixed	-3E
Resistors, Variable	-136
Resolvers, Electrical	-45A
Retaining Rings	-40A
Rivets	-14A
Screws	-17A
Seals, Gaskets, and Packing	-36B
Semiconductor Devices	-54A
Shielding RFI, EMI	-133
Sockets, Electrical	-123
Solenoids	-13A
Springs	-27A
Sprockets	-51
Switch, Rotary	-6B
Switch, Thermal	-71A
Switch, Toggle	-70A
Switches, Flow, Air and Liquid	-129
Switches, Illuminated	-137
Switches, Pressure	-117
Switches, Reed	-128
Switches, Sensitive	-138
Switches, Transducer or Solid State	-127
Synchros	-44A
Terminal Boards	-9C

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE 1. AEDPS data base titles and dash-numbered parts. (Cont)

AUTOMATED DATA BASE TITLES	MIL-STD-35 DASH-NUMBERED PARTS
Terminals and Terminal Strips	-19A
Thermistors	-76A
Thermocouples	-105
Timers, Internal, Sequential, Stop	-131
Transducers	-48A
Transformers	-7C
Transmitters	-108
Tubing	-18
Universal Joints	-104A
Valves (Powered)	-46B
Washers, Spacers and Shims	-5E
Waveguides	-42A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

MILITARY

MIL-M-38510	Microcircuits, General Specification for

STANDARDS

MILITARY

MIL-STD-12	Abbreviations for Use on Drawings, Specifications, Standards and Technical Documents
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-961	Military Specifications and Associated Documents, Preparation of
DOD-STD-1476	Metric System, Application in New Design

FEDERAL

H4-1	Cataloging Handbook, Federal Supply Code for Manufactures

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center, (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099).

2.2 Non-govenment publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the document cited in the solicitation (see 6.2).

ASTM E380	Metric Practice Guide

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, Pa. 19103.)

(Non-government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services).

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

3.1 Automated data base. A file of retrievable data stored on magnetic disks or magnetic tapes describing physical and functional characteristics of an item.

3.2 Base document. A federal, military, or industry item specification or standard containing the description of an item to which exceptions have been taken in order to describe a similar item.

3.3 Characteristic code. A four-digit numeric or alphanumeric code preassigned to a standard paragraph stored in an automated data base. The base code when used in conjunction with a characteristic value causes the standard paragraph to be printed in a MSE.

3.4 Characteristic name. An abbreviated statement using key words of the standard which describes one characteristic of an item.

3.5 Characteristic value. A set of characters, words, or numbers that when entered into the computer with a previously assigned characteristic code, causes a standard paragraph to appear in a MSE.

3.6 Dash-numbered part book. One of many parts (volumes) of MIL-STD-35 which describes physical and functional characteristics pertinent to an item (e.g., bearing, fuse, oscillator, sprocket, etc.). Instincts AEDPS users in the preparation of a SRS for a computer generated MSE.

3.7 Keyword code index (KCI). An index of characteristic codes for standard paragraphs and the respective keyword(s) from the paragraph. See Specification Requirements List (SRL). The KCI indicates the logic in the use of the automated data base by indentation level, asterisks, instructions and punctuation.

3.8 Military specification exception document. A procurement document, prepared for the purpose of specifying exceptions to a Department of Defense industry specification or standard.

3.9 Requester. Any activity that submits a request for the preparation of a MSE.

3.10 Requester's number. A six (6) digit numeric code assigned by the user to distinguish SRS inputs.

3.11 Specification requirements list. A previous title for the present KCI. Part books containing a SRL used extensive explanatory paragraphs and cross references, which are not needed with the KCI (see Appendix E).

3.12 SRS control number. The twelve (12) digit numeric code made up of the title code and requester number. This is used to identify the specific SRS in communications when problems are located. This number also prints on the last page of MSE text.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

3.13 Standard Paragraph. A retrievable statement or series of statements pertaining to one physical or functional item characteristic stored in AEDPS.

3.14 Title code. A six (6) digit numeric code preassigned to an item within a family group. Digits 1-3 are the family group and digits 4-6 the noun name code. Title codes for an item are located in Table I, of the subject dash-numbered part.

3.15 User. A term used to refer to any activity that has established an interest in a particular MSE.

3.16 Acronyms.

AEDPS	Automated Engineering Document Preparation System U.S. Army Materiel Command, Alexandria, Va 22333
CAGE	Commercial and Government Entity
DOC DES	Document Designation
DODISS	Department of Defense Index of Specifications and Standards
KCI	Keyword Code Index
MSE	Military Specification Exception
SRS	Specification Requirements Sheet

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENT'S

4.1 Concept. The AEDPS is based on the fact that major features and characteristics of most items are specified by an existing military or industry document. Generally, special or unique application requirements call for exceptions to a base document. AEDPS takes advantage of this situation.

4.2 MSE formats. Unless otherwise specified, each MIL-STD-35 dash-numbered part provides the means by which one of two formats may be selected. All requirements described in this document are applicable to either of the formats selected.

4.2.1 Six-section format. A six-section format similar to a Military Specification with paragraph numbers.

4.2.2 Single-section format. A single-section format similar to a Military Specification Sheet without paragraph numbers.

4.3 Request for MSE. The user shall, if the item is of a type contained in MIL-SID-35 and any of its parts, submit data as specified in Appendix G in one of the following ways:

a. Mail complete SRS with illustration, if required.

b. Enter SRS directly into AEDPS data control computer by the use of a telecommunications terminal.

c. Mail data depicting requirements which can be satisfied by commercial items and/or vendor-developed items (example, vendor catalog sheets) with required quality assurance provisions. A SRS will be generated by AEDPS Data Control from the data. Upon receipt of the SRS, the computer will search for an equivalent MSE with the same vendor part number. If a MSE is not located, the computer will generate a preliminary MSE. Figure 1 depicts a flow chart of MSE generation.

4.3.1 Subject matter. Subject matter elements (paragraphs, paragraph titles, document titles, tables, etc.) that appear in MSEs are in the AEDPS data base with their identifying characteristic codes. Some of these elements are incomplete and must be completed by a AEDPS requester. Some standard paragraphs cover exceptions and some require a write-in value (characteristic value) entry for the completion of statements. The codes are shown in MIL-STD-35 and the dash part books along with the paragraphs to which they relate.

By inputting selected codes and values to define a part and specify exceptions, the requester can provide the data for a MSE (see figure 2). Commonly used words, phrases, language style, quality assurance philosophy, etc., are in accordance with MIL-STD-961.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.


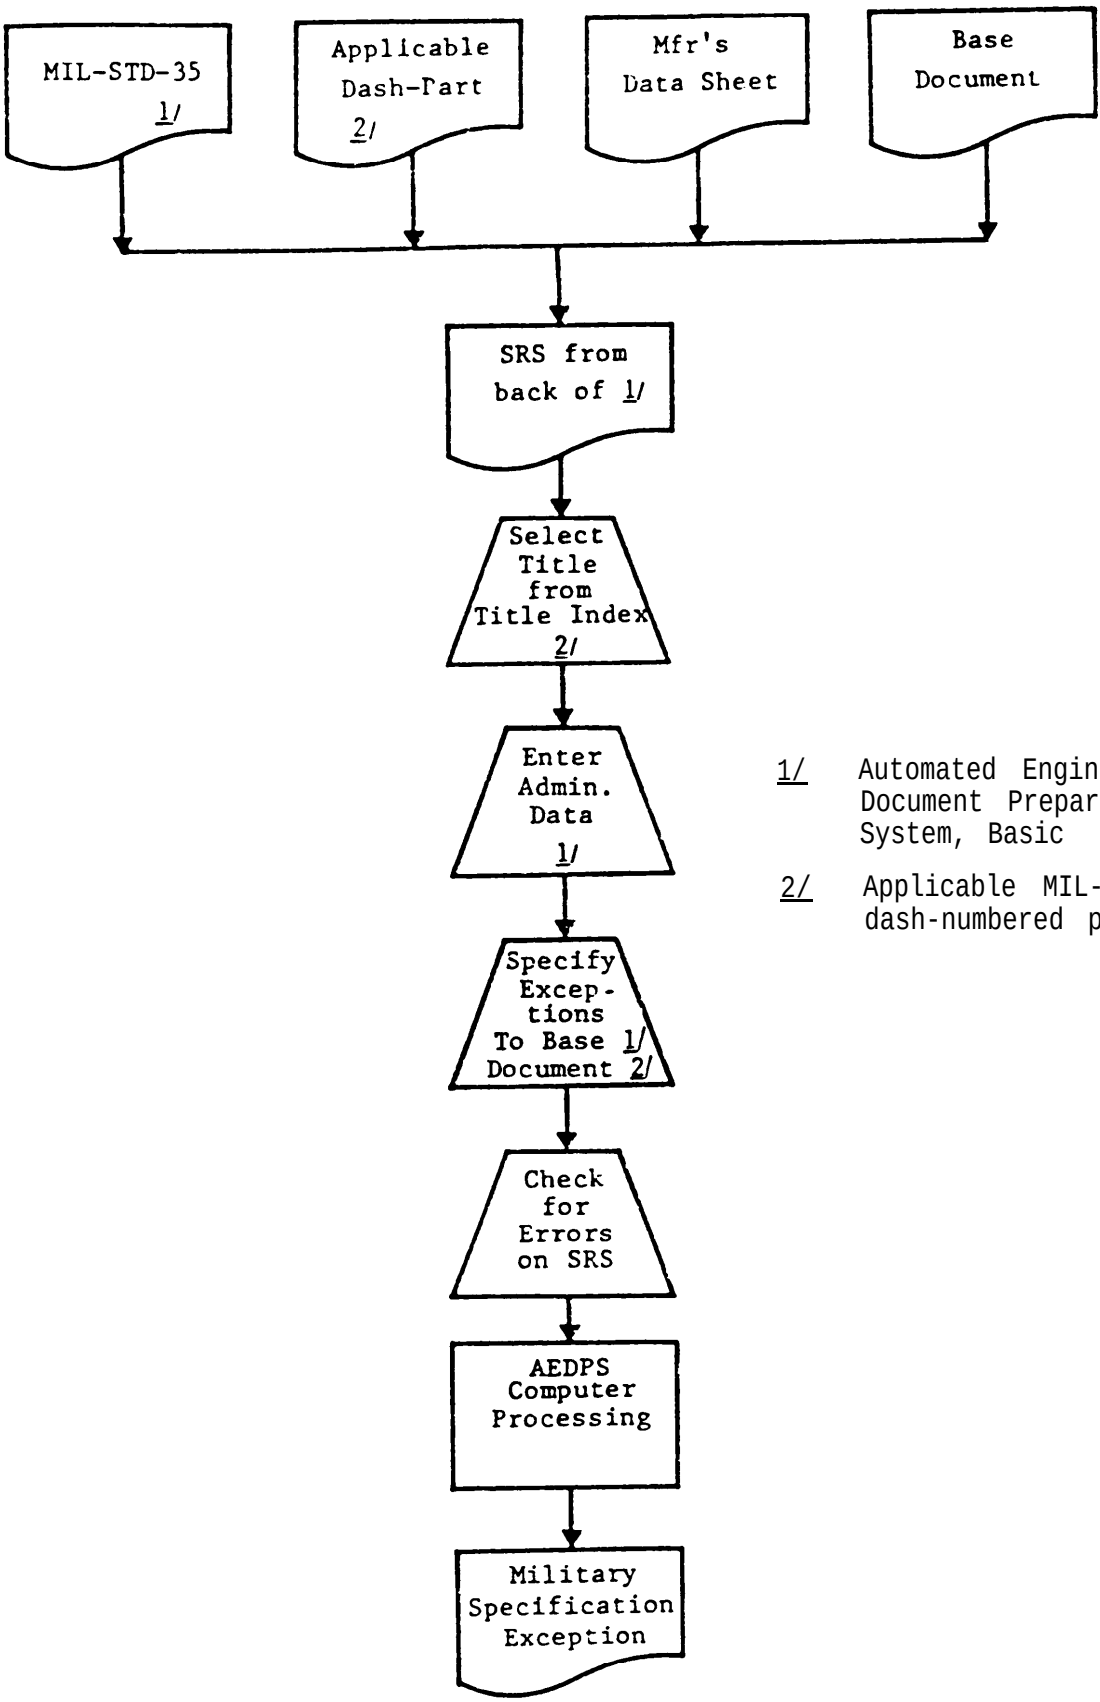


FIGURE 1. Requester simplified flow chart.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

SRS Entry:



Standard Paragraph:

POWER RATING. THE POWER RATING SHALL BE 1571 WATTS(S).

MSE Paragraph:

POWER RATING. THE POWER RATING SHALL BE 0.5 WATTS(S).

Figure 2. Example of MSE paragraph completion.

4.4 Base document. Each MSE contains the following paragraph:

> THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), (IDENTIFIER FILLED BY AEDPS USER), EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.

The above paragraph in each MSE in conjunction with a base document(s), effectively specifies that the total requirements include:

a. All requirements specified in the base document(s) not deleted or modified by the MSE.

b. All additional requirements specified in the MSE.

4.5 Document number. Each MSE will be assigned a document number similar to one of the following forms:


4.5.1 Federal specification.

PGGGW571-001


Military Specification Exception
Stem number of base document (GGG-W-571)
Computer assigned serial number

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.


4.5.2 Federal standard.

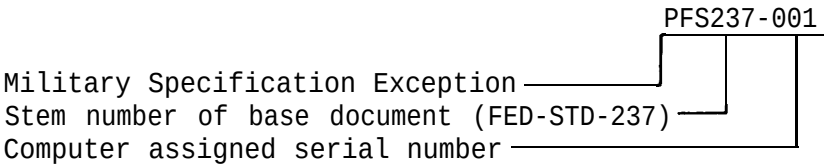


4.5.3 Military specification.

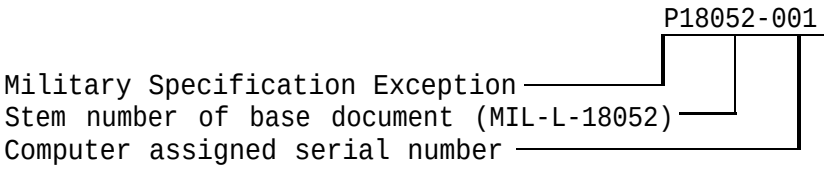

4.5.4 Military standard.

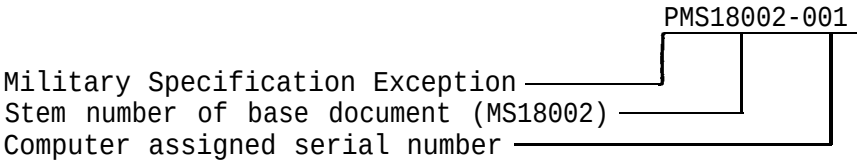

4.5.5 Industry standard.

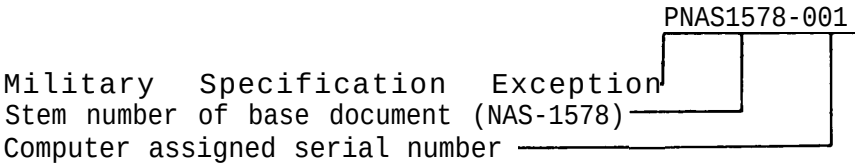

4.5.6 Stem number of base document. This part of the document will always be a portion of the base document identifier.

4.5.7 Serial number. The AEDPS computer has been programmed to assign the serial number. Serial numbers are assigned in numerical order for each base document number.

4.5.8 Revision letter. The revision letter, when used as part of the document number, indicates that the original MSE with the same number has been revised.

4.6 Part number. In military documentation, the part number is limited to 15 characters. The part number(s) for the item(s) described by a MSE will be the same as the MSE document number plus a dash and appropriate suffix number(s). Revision letters and activity symbols are not included in the part number. However, if the P and stem number exceed seven characters, as shown in the examples in 4.5 above for Federal specification, Military standard and industry standard, the dash between the stem number and the serial number will be dropped in the MSE part number. If the P and stem number are seven or less characters, as shown in 4.5 for Federal standard and

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

Military specification, the dash between stem number and serial number will be retained. Figure 3 depicts six different items with tabulated characteristics in a MSE. Assume the MSE is the third exception document submitted to MIL-C-39003, then the part number for the first item (Suffix NO. 01) is P39003-003-01. The characteristics for the Suffix No. 01 part are shown adjacent to the 01 suffix and characteristics for the Suffix NO. 02 part are adjacent to the 02 suffix. The Source Table, Table V of Appendix B of this document, uses the same Suffix No. to specify vendor and vendor part number.

TABULATED CHARACTERISTICS TABLE

SUFFIX NO.	CAP MICROFARAD	CAP TOL PLUS PCT	CAP TOL MINUS PCT	RATED VOLTAGE	DISS FAC PCT MAX
01	0.10	10	10	35	3.0
02	0.10	10	10	50	3.0
03	0.68	10	10	35	3.0
04	1.0	5	5	50	3.0
05	1.0	10	10	50	3.0
06	2.7	10	10	25	4.0

FIGURE 3. Tabulated characteristics depicted in a multi-item MSE.

4.6.1 Limited tabulation. When the P and stem number of the base document total nine characters, only 99 parts may be tabulated per MSE due to the 15 character limitation to military part numbers (see figure 4).

4.6.2 MIL-M-38510. MSEs that use MIL-M-38510 as the base document have a 35 inserted between the P and the stem number because of restrictions in MIL-M-38510. In these MSE part numbers there is no dash between the stem number and the serial number (see figure 4).

Base Document	Part Number	Remarks	Max Suffix No.
GGG-W-571	PGGGW571001-01	P+7 characters	300
MMM-A-1473	PMMMA1473001-01	P+8 characters	99
F-S-237	PFS237-001-01	P+5 characters	300
MIL-R-55182	P55182-001-01	P+5 characters	300
MS18002	PMS18002001-01	P+7 characters	300
MIL-M-38510	P3538510001-01	P+7 characters	300
ISO R1234	PISOR1234001-01	P+8 characters	99
MIL-T-27	P27-001-01	P+2 characters	300

FIGURE 4. Examples of part numbers with base documents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

4.7 Preliminary MSE. A preliminary MSE is the result of processing a SRS or remote terminal input. The word "PRELIMINARY" is printed on the top and bottom of the first page. This preliminary document may be corrected as necessary until an accepted document is received. When accepted, the document is finalized by the removal of PRELIMINARY statements.

4.8 Draft MSE. When an accepted MSE is revised, the MSE will be reissued at the next higher revision letter with DRAFT on the top and bottom of the first page and the following draft disclaimer below the title:

> THIS MILITARY SPECIFICATION EXCEPTION HAS BEEN PREPARED BY THE U.S. ARMY MISSILE COMMAND, DEPARTMENT OF THE ARMY, BASED UPON CURRENTLY AVAILABLE TECHNICAL INFORMATION. THIS REVISION HAS NOT BEEN APPROVED FOR PROMULGATION AS A COORDINATED REVISION TO THE BASIC MILITARY SPECIFICATION EXCEPTION. THIS REVISION IS SUBJECT TO CHANGE.

If further changes are requested, the document becomes a revised draft and the coordination cycle starts again.

4.8.1 Document date. The date of the document changes to the processing date each time it is revised.

4.9 MSE revision. A request for a revision to an existing MSE may be made by any of the following methods:

a. Submitting a marked copy of the current revision of the MSE.

b. A SRS may be submitted showing the codes and values to be added, deleted, or changed and the document number. This may be mailed or entered by remote terminal in the revision request mode.

c. A letter, or remote terminal message, may be sent, referencing the document to be changed, with the required changes.

4.10 MSE acceptance. A request to finalize a MSE may be by letter of concurrence to MICOM or a telecommunications terminal may be used to input the request directly into the AEDPS computer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

5. DETAIL REQUIREMENTS

5.1 Introduction. This section provides specific information concerning the completion of a SRS and the subsequent generation of a MSE. Details concerning each generic part are contained in an applicable dash-numbered part of this standard.

5.2 Specification requirements sheets. If requests for MSEs arc submitted as SRSs, utilize a 80 column transcript sheet to provide data as shown in figures 29 and 30 in the back of this standard. Do not submit reduced copies as they are difficult to read for terminal entry. All characteristic value entries are limited to 189 characters (3 lines of SRS). The sequence of code use is unimportant. The computer sorts codes into sequential order. Do not use the same code twice as the computer cannot determine which is the correct entry and error messages will result.

5.3 Writing methodology The characters shown in figure 5 are the only characters that may be used on a SRS. The use of others may cause an input error to the computer and result in computer rejection. Do not use Greek symbols.

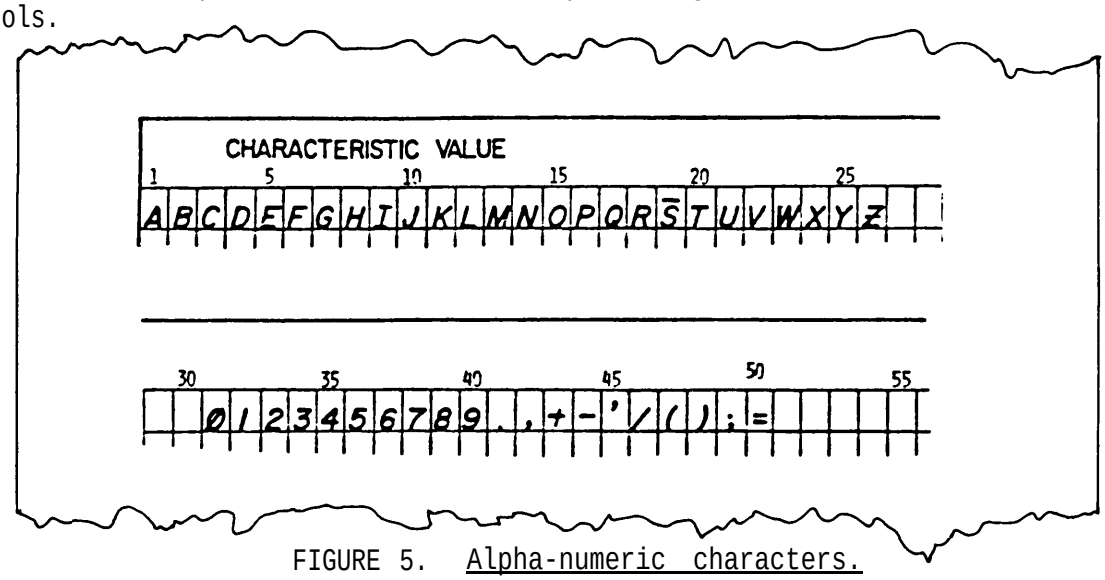


FIGURE 5. Alpha-numeric characters.

In figure 5, special attention should be given to the following:

a. Pronounced serifs at the top and bottom of the letter I shall be used to distinguish it from the numeral 1.

b. The numeral 1 shall be written directly vertical to distinguish it from "/".

c. A diagonal line through the numeral zero (0) shall be used to distinguish it from the letter O.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

d. Each letter in a Reman numeral shall require a SRS column (e.g., II requires two columns., III requires three columns; IV requires two columns).

e. A horizontal line through the letter Z (Z) shall be used to distinguish it from the numeral 2.

f. A horizontal line above the letter S (S) shall be used to distinguish it from the numeral 5.

5.3.1 Abbreviations. Abbreviations from MIL-STD-12 should be used. The only other abbreviations permitted shall be those in common usage and not subject to misinterpretation.

5.3.2 Tolerance. Plus or minus (tolerance) values shall be entered on the SRS as specified in figure 6.

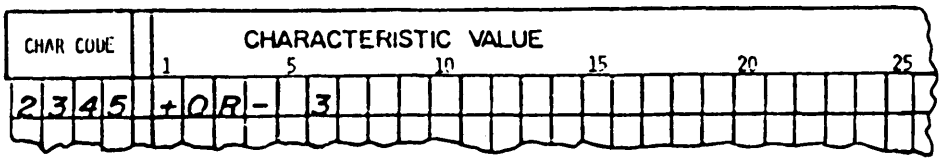


FIGURE 6. Example of tolerance characteristic value.

5.3.3 Prefixes. The printer used with AEDPS prints only upper case characters. Metric symbols should not be used as decimal multipliers because of the possible confusion. When the letter "M" is used to denote the prefix "mini", the printer will print "M" which denotes "mega". Prefixes subject to misinterpretation should be written out (see figure 7).

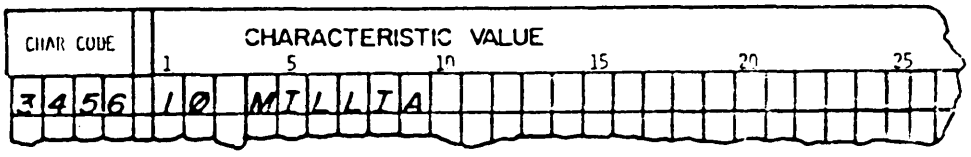


FIGURE 7. Example of prefixes used as decimal multipliers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

5.3.4 Temperature (zero or greater). Temperatures equal to or greater than zero degrees Celsius shall be entered on the SRS as specified in figure 8. The word “plus” or symbol “+” shall not be used.

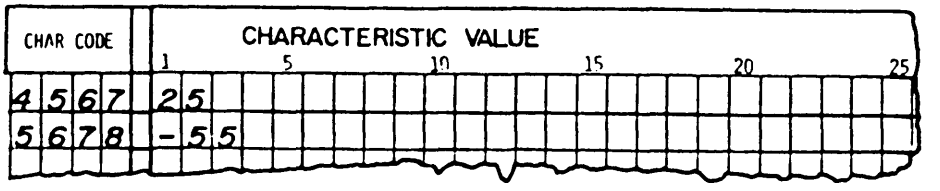


FIGURE 8. Example of temperature values.

5.3.5 Temperature (less than zero). Temperatures less than zero degrees Celsius shall be entered on the SRS as specified in figure 8. The word “minus” shall not be used.

5.3.6 Fractions. All fractions shall be in decimal form as specified in figure 9. For all values less than one, a zero shall precede the decimal point.

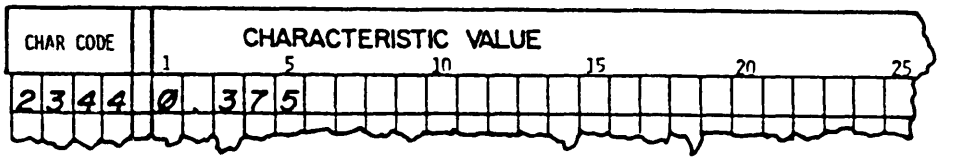


FIGURE 9. Example of a decimal characteristic value.

5.3.7 Exponential values. Exponential values shall be entered on the SRS as specified in figure 10.

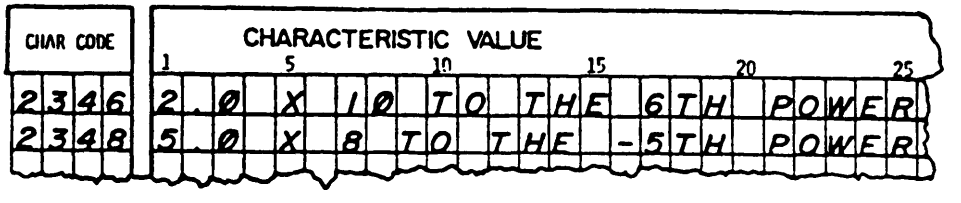


FIGURE 10. Example of an exponential characteristic value.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currentversion before use.

5.4 Tables. This paragraph provides general. instructions for completion of tables in MSEs. The tables used to complete the SRS are contained in Appendix B of this document and in the dash part books of MIL-STD-35.

5.4.1 Use of tables. To enter data for tables, enter the codes selected from the table and the characteristic value on the SRS. Only the lines and columns for which data is entered will print in the MSE.

5.4.2 Column width. Each column of data under a column heading in a table has an allotted print width. This is equal to the number of underlines beneath the heading in a table.

5.4.3 Source table. The SOURCE TABLE, Table V of Appendix B is used for the purpose of explanation (see figure 11). The column width is 27 characters for CAGE CODE NUMBER and 27 characters for MANUFACTURERS PART NUMBER. The CAGE CODE of the first source for Suffix No. 01 part is entered with code 9AAB. The manufacturer's part number is entered with code 9AAC. If no CAGE CODE is known, provide name and address in attachment to the SRS. If there is more than one source for Suffix No. 01 parts, entries are made with other appropriate codes for up to six sources and their part numbers, (codes 9AAD thru 9AAM). Unused lines do not print. Figure 11 is an example of a source table entry and figure 12 is an example of the resulting MSE source table.

5.4.4 Suffix number. The source table has codes for up to 100 suffix numbers. When more than one part is required, variable characteristics of the parts are entered using Table IV, TABULATED CHARACTERISTIC TABLE, and for each item the source CAGE CODES and part numbers are correlated with suffix numbers of Table V by the requester.

5.4.5 Table value entry. The computer breaks at spaces and does not break words unless there are no spaces. This is to be considered when tables have narrow column widths. Figure 13 is an example from column 5 of the PERFORMANCE CHARACTERISTICS TABLE, Table X of Appendix B, which is usually used to specify units of measure. This column is 5 characters wide. In this example, MILLIA, as shown with code 6414, will print as shown in figure 14 with the A on a second line which is acceptable. However, MEGOHMS as entered with code 6415 should be entered as shown with code 6416 so the computer will break the word at the space between syllables.

	CHAR CODE	CHARACTERISTIC 1 5
★SOURCE TABLE	9AAB	Ø Ø Ø Ø Ø
	9AAC	I A 2 B
	9AAD	9 9 9 9 9
	9AAE	A I B 2

FIGURE 11. Example of SRS entry from Source Table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

SOURCE TABLE

SUFFIX NO.	CAGE CODE	MANUFACTURER'S PART NUMBER
01	00000	1A2B
	99999	A1B2

FIGURE 12. Example of MSE Source Table.

CHAR CODE	CHARACTERISTIC VALUE (1 5 10 15 20 25)
6414	MILLIA
6415	MEGOHMS
6416	MEG OHMS

FIGURE 13. Example of entries wider than column width of table.

COL. 5

MILLI
A

MEGOH
MS

MEG
OHMS

FIGURE 14. Example of MSE print of figure 13 SRS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

5.5 Multi-line characteristic value. When more than one line is required to enter a characteristic value, the complete entry shall be entered on consecutive lines on the SRS. Any code may have a characteristic value entry of up to 189 characters (see figure 15).

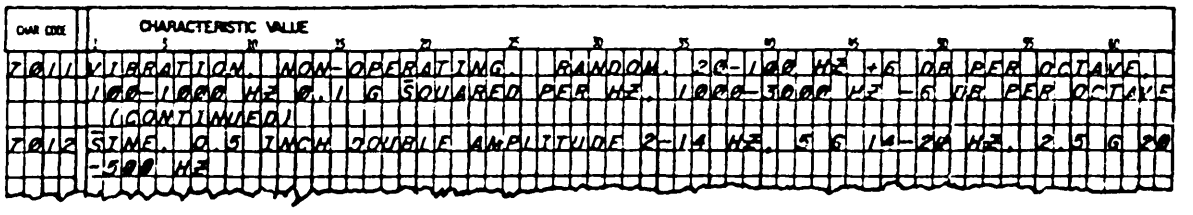


FIGURE 15. Example of multi-line characteristic value.

NOTE.

a. When a word or a character group ends in column 63, a space shall be left in column 1 of the following line (see lines 2 and 3 of figure 15).

b. When a word or a character group ends in column 62, the next word shall begin in column 1 of the next line (see lines 1 and 2 of figure 15).

c. When more than one line is required to enter a characteristic value, all columns, including column 63, shall be used even if this breaks a word or a group of characters (see lines 4 and 5 of figure 15).

d. Punctuation is used as in writing, two spaces after a period and one space after a comma.

e. Consecutive codes for additional requirements, quality assurance or notes may be used to detail a statement of more than 189 characters (see figures 15 and 16).

VIBRATION, NON-OPERATING. RANDOM, 20-100 HZ +6 DB PER OCTAVE, 100-1000 HZ 0.1 G SQUARED PER HZ 1000-3000 HZ -6 DB PER OCTAVE (CONTINUED).

SINE, 0.5 INCH DOUBLE AMPLITUDE 2-14 HZ, 5 G 14-20 HZ, 2.5 G 20 -500 HZ.

FIGURE 16. Example of MSE print of figure 15 SRS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

5.6 Mandatory requirements. Some specification requirements described herein are mandatory and shall be entered on each SRS. If one or more of these mandatory characteristics are omitted from a request, an edit routine (see 5.21) will prevent the generation of the desired MSE. Mandatory requirements are designated by an asterisk (*) in Figure 17 which is an example of a simplified input form which may be used. Figures in this book utilize this simplified form for easier terminal input.

5.6.1 Title code (columns 1 through 6). The title code shall be selected as specified in the Military Specification Title Index section of an applicable dash-numbered part of this standard. All characters of the title code are numeric. When an applicable title code does not appear in the title index, the requester may leave columns 1 through 6 blank and a title code will be created (see figure 17).

5.6.2 Requester's number (columns 7 through 12). A requester's number identifies the request (SRS) and is any number assigned by the requester for administrative purposes. The requester's number shall consist of six numeric characters. These columns are identified as REQUESTER NO. (see figure 17).

5.6.3 Requester's name. The requester's name is mandatory and shall be entered on the SRS with code 0101 (see figure 17). It is recommended that all SRSs for a weapon system use one requester as point of contact.

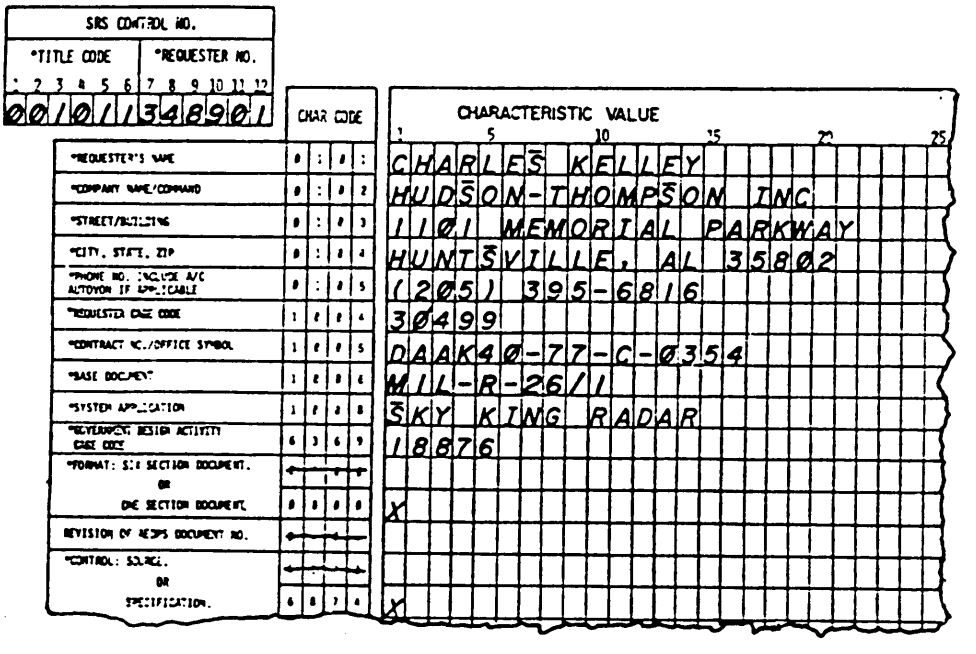


FIGURE 17. Example of mandatory management data entered on an SRS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

5.6.4 Company name/command. The company name or military command of the requester shall be entered on the SRS with code 0102 (see figure 17).

5.6.5 Street/building. The street address or building identification of the requester shall be entered on the SRS with code 0103 (see figure 17).

5.6.6 City, state, zip code. The requester's city, state, and zip code shall be entered on the SRS with code 0104 (see figure 17).

5.6.7 Phone number. The requester's phone number shall be entered on the SRS with code 0105 (see figure 17). The number shall include the area code.

5.6.8 Requester's CAGE CODE. The requester's CAGE CODE shall be entered on the SRS with code 1004 (see figure 17).

5.6.9 Contract number/office symbol. The contract number of a prime contract for a government contractor shall be entered on the SRS with code 1005 (see figure 17). For government activities, an abbreviated proper name and office symbol shall be entered on the SPS (see figure 18).

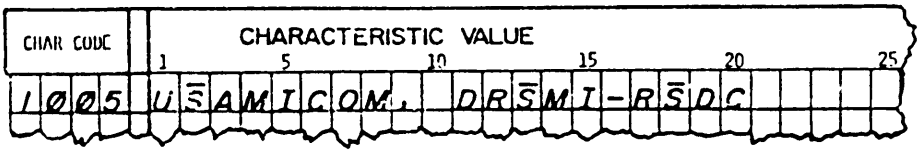


FIGURE 18. Example of a government activity symbol entered on an SRS.

5.6.10 Base document. The base document to which exceptions are being taken shall be entered on the SRS with code 1006 (see figure 17). The method of selecting the document is described in the Title Index of the applicable dash-numbered part.

5.6.11 System application. The system application shall be entered on the SRS with code 1008 (see figure 17). This is the weapon system name.

5.6.12 Government design activity CAGE CODE. The government design activity CAGE CODE shall be entered on the SRS with code 6369. This is the CAGE CODE of a contract awarding activity (see figure 17).

5.6.13 Format. The selection of format style for the requested MSE is determined by the use of either code 0700 or code 0800 entered with an "X" on the SRS.

5.6.13.1 Six-section MSE format. A 6-section MSE format, resulting from the use of code 0700 and an "X", appears similar to the format of a 6-section Military Specification with paragraph numbers (see Appendix C).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

5.6.13.2 Single-section MSE format. A single-section MSE format, resulting from the use of code 0800 and an "X", appears similar to the format of the Military Specification Sheet without paragraph numbers (see Appendix D).

5.7 Units of measure. To specify units of measure, inch-pound (U.S.) and the International System of Units (SI)s are provided. If an item is designed in inch-pound units, the only units of measure that may appear in the MSE are inch-pound. If an item is designed in SI, the only units of measure that may appear in the MSE are SI. Both units of measure cannot appear in the same MSE. Consult DOD-STD-1476 for guidance in the application of inch-pound and SI units of measure. For guidance in the use of SI units of measure, refer to ASTME380. If no units of measure are required, there is no need to enter one of these codes.

5.7.1 Inch-pound. Code 6941 entered on the SRS with an "X" will cause the following statement to print in the MSE:

> UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.

5.7.2 SI. Code 6942 entered on the SRS with an "X" will cause the following statement to print in the MSE:

> UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

5.8 Specification control MSE. When the requester desires to specify the MSE. as a specification control document, code 6874 and an "X" entered on the SRS will cause a specification control statement (see figure 19) to appear in the forthcoming MSE.

SOURCE(S).
THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE "SUGGESTED SOURCE(S) OF SUPPLY" HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).

FIGURE 19. Example of spacification control statement.

5.9 Source control MSE. When the requirement exists for a source control document, code 6873 and an "X" entered on the SRS will cause a source control statement (see figure 20) to appear in the forthcoming MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

SOURCE(S).
THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.


FIGURE 20. Example of source control statement.

5.10 Procurement source(s). To specify sources of supply, the SOURCE TABLE, Table V, is provided in Appendix B. It is mandatory that code 6873 (see 5.9) or 6874 (see 5.8) be used to specify that the MSE is source or specification control. Table V is available to list a maximum of six approved vendors for a single-item MSE or to list a maximum of 300 different items, each with a maximum of six vendors, for a multi-item MSE. The codes relative to suffix number one are the only codes that may be used to enter sources for a single-item MSE. Refer to 5.4 for a general explanation in the generation of tables. Note: Each SRS must show at least one vendor CAGE CODE and part number for each part.

5.11 Revision of existing MSE. When a revision to an existing MSE is being requested, the MSE document identifier shall be entered on the SRS on the same line as characteristic code 0108.

5.12 Configuration. Most dash-numbered parts of this standard contain applicable illustrations of items covered therein. However, if no change is required to depict the configuration or dimensions shown in the base document, there is no need to include an illustration in the MSE.

5.12.1 Illustrations. Code 1009 with an illustration number(s) entered on the SRS (see figure 21) will cause the following statement to print in the MSE.

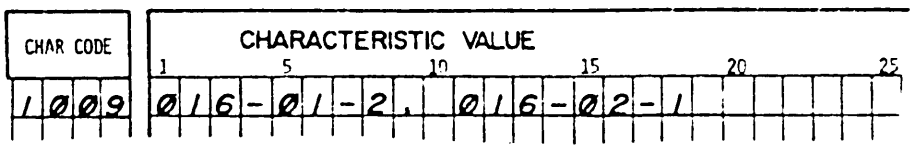

CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 016-01-2, 016-02-1.

FIGURE 21. Example of illustration number entered on SRS.

5.12.1.1 Obtaining illustrations. When the applicable dash-numbered part of this standard does not contain an applicable illustration, an illustration will be prepared from data submitted with the SRS as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

a. When a minor change(s) to an existing illustration will provide a suitable illustration, a copy of the existing illustration, with required changes marked thereon, may be submitted with the SRS, or

b. When more than minor change(s) to an existing illustration is required, a drawing or sketch may be submitted with the SRS. An illustration will be prepared. The assigned illustration number and dimensional. values will be added to the MSE.

5.12.2 Dimensions. To specify dimensions on an illustration from the applicable dash-numbered part, mark-up the illustration with the values desired (see figure 22). If an illustration does not exist, submit a request for a new illustration with the desired dimensional values. The dimensional values that are tabulated shall appear on the illustration as legend letters. When using terminal entry with an existing illustration from the dash part book, use dimension codes from Table III to send values. If a new illustration is required for a tabulated document, assign legends to the illustration submitted so the tabulation table may show values-under the proper column headings.

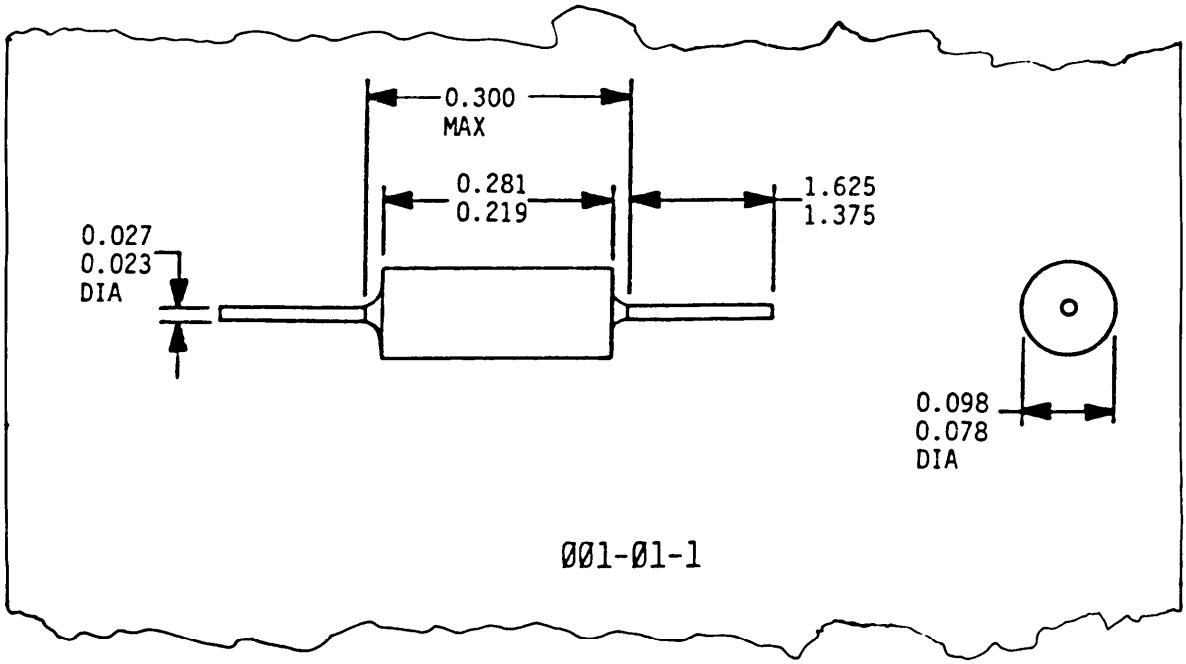


FIGURE 22. Example of a dimensioned illustration.

5.12.2.1 Schematics and nondimensioned illustrations. Schematics and other illustrations which do not denote configuration or interface dimensions shall be entered on the SRS with code 4950. Code 4950 will create, in the MSE, a reference to the schematics and illustrations under the title “ILLUSTRATIONS”.

5.13 Materials. To specify materials for an item, the MATERIAL TABLE, Table VI, is provided in Appendix B.

5.13.1 Characteristic value entry. Characteristic values entered with codes from the first line (Ref No. 01, Table VI) will specify the characteristics applicable to the component name entered with code 5080. The second line (Ref No. 02) will specify the characteristics applicable to the component name

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

entered with code 5090, etc. (see figures 23 and 24). Refer to 5.4 for a general explanation in the generation of tables.

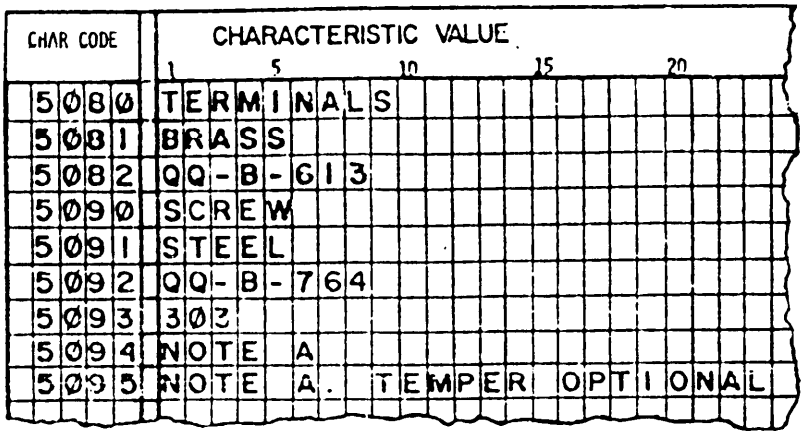


FIGURE 23. Example of material table entries.

MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBERS ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY).

MATERIAL TABLE

REF NO.	COMPONENT NAME	MATERIAL NAME	SPECIFICATION NUMBER
01	TERMINAL	BRASS	QQ-B-613
02	SCREW	STEEL	QQ-S-764

MATERIAL TABLE (CONT)

REF NO.	ALLOY NUMBER	COND. OR TEMPER
02	303	NOTE A

NOTE A. TEMPER OPTIONAL.

FIGURE 24. Example of a material table printed in a MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

5.13.2 Material name. To specify the material for a component, write in the material required with the code from MATERIAL NAME column.

5.13.3 Material documents. Only document identifiers are permitted in the specification number column. Other information shall be entered in type, grade, class, or compositions columns.

5.13.4 Material table notes. Notes A through E are provided to specify a characteristic value that is too lengthy or to define further a characteristic value. To reference note A of Table VI, the words “NOTE A“ are entered as part of the characteristic value entry (see figure 23). The words “NOTE A" will print in the Material Table of the MSE, on the line under the column heading being further defined. The note will print after the table (see figure 24). The same procedure is used for the remaining notes.

5.14 Finishes. To specify finishes for an item, the FINISH TABLE, Table VII, is provided in Appendix B. The procedures for using the MATERIAL TABLE (see 5.13) should be used to complete Table VII.

5.15 Tabulation. When more than one part of the same configuration is required, variable characteristics are tabulated using the TABULATED CHARACTERISTICS TABLE, Table IV of Appendix B. Values of resistance or capacitance, or dimensions of screws or nuts are typical examples of variable characteristics for a multiple-item MSE. A suffix number is assigned to each tabulated part (see figures 25 and 26). This suffix number becomes part of the part number and is also reflected in the source table (see 5.4). When more than one part type is shown in the source table, variable characteristic(s) must be shown in the tabulated characteristic table. up to 20 variable characteristics for 300 parts may be tabulated.

5.15.1 Using the tabulated characteristics table. Each dash part book has a paragraph or table which lists the column heading codes. The codes from Table III, DIMENSION/TABULATION codes of Appendix B, may also be used for tabulation. A tabulation code is entered as a characteristic value with the code at the top of Table IV (e.g. 8AAA, 8BAA, etc.), (see figure 25). The code when used as a characteristic value causes the column heading as shown in the dash part book or Table 111 to print in the MSE (see Figure 26). The variable characteristic value(s) for suffix number 01 are entered with codes adjacent to SUFFIX NO. 01 (8AAB, 8BAB, etc.). The codes for 100 suffix numbers are in Table IV with codes for the first five columns on the first page and the next five columns four pages later where SUFFIX NO. 01 appears again, etc.

The alphanumeric sequence is self-evident and continues for 300 items if required.

5.16 Applicable documents. Section 2 will appear in the six-section format. Section 2 of the MSE may contain a list of all referenced documents within sections 3, 4, and 5 of the MSE. Two methods are utilized to generate the list of applicable documents, as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

SRS CONTROL NO.											
*TITLE CODE						*REQUESTER NO					
1	2	3	4	5	6	7	8	9	10	11	12
1	1	5	Ø	Ø	3	1	2	3	4	5	6

	CHAR CODE	CHARACTERISTIC VALUE (1 5 10 15)
-PART BOOK TAB. CAND.	8AAA	6 9 9 7
	8AAB	Ø . 5 Ø Ø
	8AAC	Ø . 3 7 5
-PART BOOK TAB. CAND.	8BAA	1 6 2 Ø
	8BAB	M S 3 3 6 5 6 E 4
	8BAC	M S 3 3 6 5 6 E 5
BASIC TABLE III	8CAA	1 Ø 1 1
	8CAB	1 . 1 4
	8CAC	2 . 1 6

FIGURE 25. Example of tabulated characteristics table entry.

TABULATED CHARACTERISTIC TABLE

SUF FIX NO.	NOMINAL WEIGHT EACH LB	PORT 1 DOCUMENT DOC DES	AA MIN
01	0.500	MS33656E4	1.14
02	0.375	MS33656E5	2.16

FIGURE 26. Example of tabulated characteristics printed in MSE.

5.16.1 Automatic MSE data. The computer will automatically print referenced document identifiers and titles in section 2 of the MSE when either of the following conditions occur:

a. A code and an "X" is used to specify a complete standard paragraph which contains a referenced document.

b. A code and a written-in document identifier is used for the completion of an incomplete standard paragraph requiring only a document designation (DOC DES).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

5.16.2 Manual. The APPLICABLE DOCUMENTS TABLE, Table II of Appendix B, may be utilized at the requester's option when codes from the KCI and written-in document identifiers are used to satisfy characteristic values for "PER BASE DOCUMENT EXCEPT ", Additional Requirements, Additional Marking, Additional. Quality Assurance, Additional Packaging, or other written-in values containing referenced documents. Each written-in document identifier shall be in the current issue of the Department of Defense Index of Specifications and Standards (DODISS). Revision letters shall not be included.

5.16.3 Applicable Documents Table. The APPLICABLE DOCUMENTS TABLE, Table II of Appendix B, applies only to those documents as described in paragraph 5.16.2. Applicable documents to be included in section 2 of the MSE shall be listed under the proper headings. Therefore, documents shall be entered on the SRS in the same sequence under each heading in which they are listed in DODISS.

5.16.3.1 Federal specifications. The document identifier of applicable documents to be listed first under Federal specifications shall be entered on the SRS with the first Federal specification characteristic code, 6015 (see Table II). The document identifier of the second Federal specification shall be entered on the SRS with the second Federal specification characteristic code, 6016. In the same manner, the document identifier of the third, fourth, and fifth Federal specifications shall be entered on the SRS with the third, fourth, and fifth Federal specification characteristic codes.

5.16.3.2 Other applicable documents. The document identifier of other applicable documents shall be entered on the SRS with codes from Table II in the same manner as specified above for Federal Specifications.

5.16.3.3 Revision letters and specification sheet numbers. The document identifiers, entered on the SRS with codes from Table II, shall not include revision letters but may include specification sheet numbers.

5.16.3.4 Spaces within document identifiers. Although the document identifiers of some documents are normally written with spaces, spaces shall not be used when these identifiers are entered on the SRS (see figure 27 for ASTME380). Similarly, no dash is entered in MS numbers.

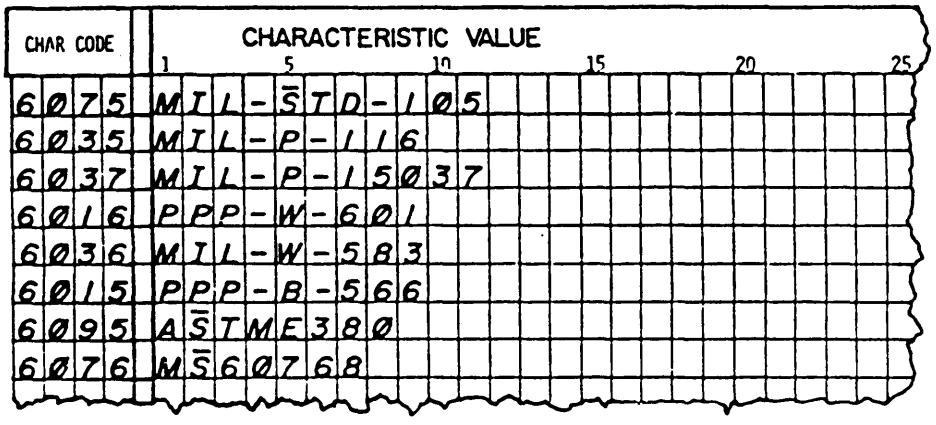


FIGURE 27. Example of applicable documents entered on SRS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

5.17 Nomenclature. The nomenclature used in MSEs to designate requirements, tests, and inspections are contained in the data base and do not always agree with the nomenclature used in the base document. For example, the base document may contain previsions for a "Reproduction Inspection", while the MSE refers to this inspection as "First Article Inspection". The NOMENCLATURE TABLE, Table XXVII of Appendix B, may be used to resolve this difference. Code 5460, entered with the words "PREPRODUCTION INSPECTION", and code 5560, with the words "FIRST ARTICLE INSPECTION" entered, will specify that all exceptions, listed under First Article Inspection in the MSE, shall apply as Preproduction Inspection in the base document.

5.18 Additional write-in characteristics. Provisions are available for entering additional write-ins on the SRS. It shall be remembered that a characteristic value for a characteristic name cannot exceed 189 characters, including punctuation and spaces. However, additional space may be obtained by adding two or more consecutive characteristic codes and their related characteristic values (e.g., code 7011 added to code 7012 will permit two paragraphs of 189 characters each, for a total of 378 characters, see figures 15 and 16). Two rules shall be observed to maintain continuity:

1. The computer will automatically punctuate the end of each paragraph with a period.

2. Statements must be completed within 189 characters.

5.18.1 Additional requirements. When it becomes necessary to specify additional requirements in section 3, codes 7001 through 7005 may be used. The sequence by which the codes are used will determine the sequence printed in the MSE (i.e. the requirement entered on the SRS with code 7001 will print first in the MSE; code 7002, second; etc.). Code 7001 must be used if code 7002 is used, etc.

5.18.2 Additional part marking. When it becomes necessary to specify additional marking information in section 3, codes 6991 through 6995 may be used. The sequence by which the codes are used will determine the sequence printed in the MSE (i.e., the marking information entered on the SRS with code 6991 will occur first in the MSE; code 6992, second; etc.).

5.18.3 Additional quality assurance provisions. When it becomes necessary to specify additional quality assurance provisions in section 4, codes 7011 through 7015 may be used. The sequence by which the codes are used will determine the sequence printed in the MSE (i.e., the quality assurance provision entered on the SRS with code 7011 will occur first in the MSE; cede 7012, second; etc.).

5.18.4 Additional packaging requirements. When it becomes necessary to specify additional packaging information in section 5, codes 7006 through 7010 may be used. The sequence by which the codes are used will determine the sequence printed in the MSE (i.e., the packaging information entered on the SRS with code 7006 will occur first in the MSE; code 7007, second; etc.).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

5.18.5 Additional notes. When it becomes necessary to specify additional notes in section 6, codes 7016 through 7020 may be used. The sequence by which codes are used will determine the sequence printed in the MSE (i.e., additional notes entered on the SRS with code 7016 will occur first in the MSE; code 7017, second; etc.).

5.19 Superseded document. When a MSE is being requested which will supersede one or more existing documents, the superseded document identifier(s) and date(s) should be entered with codes from the SUPERSEDED DOCUMENT TABLE, Table XXV of Appendix B. The document identifier shall be self descriptive, such as, "PURCHASE DESCRIPTION PD-60425", "DRAWING 10059004" or "MIS-14216B" and the date should be in government format. Refer to paragraph 5.4 for a general explanation in the generation of tables. The part number(s) in the documents may be referenced by the use of Table XXVI, PART NUMBER CROSS REFERENCE TABLE, in Appendix B.

5.20 Keyword code index (KCI). The KCI provides an outline for building a MSE. The KCI is a left-hand page. The STANDARD PARAGRAPHS present the words (minus the user supplied entry) that will be printed in the MSE. Characteristic Codes (CHAR CODE) align, horizontally, with KCI characteristic names and with corresponding standard paragraphs. The CHARACTERISTIC NAME column of the KCI contains only keywords selected from a corresponding standard paragraph and presents an easy-to-read index of available design, construction, requirements, and test parameters.

5.20.1 KCI characteristic name punctuation. KCI characteristic rimes are punctuated four ways; those with a period at the end, those with a unit of measure in parenthesis at the end, those with a colon at the end, and those with an underline at the end (see figure 28). The period or colon indicates an "X" is the required SRS characteristic value entry (codes 6300, 6292, 6293). A parenthetical unit of measure indicates either a numeric value, an alpha character, an illustration number, or a document designation is the required SRS characteristic value entry (codes 4886, 4885, 4849). An underline indicates that a standard paragraph shall be completed by entering the standard paragraph related code from the CHAR CODE column and additional words, up to 189 characters, necessary to complete the standard paragraph. Figure 29 contains an example of selection of a characteristic name with an underline.

5.20.2 Interrelationship of KCI characteristic names. Valid relationships between codes are indicated to the user through the use of indentations, the note "(SELECT ONE)", and an "*" which denotes a mandatory characteristic when the immediate characteristic cede above has been selected (see figure 28). Since the paragraph heading DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE is not preceded by an "*", it is not mandatory to specify any parameters, (see figure 28). If, however, a test method different from that in the base document is required, only one test method shall be used from the second indentation level. This restriction to one test method is denoted by the "(SELECT ONE)" after "TEST METHODS". When more than one item from the same indentation level following the term "(SELECT ONE)", is entered on an SRS, the desired MSE will not be printed, i.e. codes 4884 and 6300 cannot be used together (see 5.21).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

5.20.3 Asterisk. When the second test method from the example in figure 28 is used, "Per MIL-STD-202, Method 301.", any test parameter that has an "*" in the next indentation level (third level) shall be specified. For example, "*ALTITUDE PER METHOD 105 of MIL-STD-202, TEST CONDITION (LETTER)" and "*TEST VOLTAGE (SELECT ONE)". Here again, the "(SELECT ONE)" allows only "(VOLTS, DC)" or "(VOLTS, AC)" to be specified, but not both. When both are entered, the desired MSE will not be printed (see 5.21). The next parameter on the third indentation level is "POINTS OF VOLTAGE APPLICATION". This parameter may be specified if it is desired (no *) and one or both of the succeeding options may be specified (no SELECT ONE). Exceptions only are specified with non-mandatory codes. Figure 30 illustrates the use of the second test method shown in figure 28.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETERIC PRESSURE	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT____	4884
PER MIL-STD-202, METHOD 301.	6300
*ALTITUDE PER METHOD 105 of MIL-STD-202, TEST CONDITION (LETTER)	4886
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4885
(VOLTS, AC)	4849
POINTS OF VOLTAGE APPLICATION	
BETWEEN MUTUALLY INSULATED PAIRS.	6292
BETWEEN ALL INSULATED PARTS AND GROUND.	6293

FIGURE 28. KCI indentation format.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE	
TEST METHODS (SELECT ONE)	
Desired parameter from MIL-STD-35 dash-numbered part:	
PER BASE DOCUMENT EXCEPT____	4884

SRS entry:

CHAR CODE	CHARACTERISTIC VALUE (1 5 10 15 20 25 30 35)
4884	THE TEST VOLTAGE SHALL BE 500 VAC


MSE paragraph:

DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT THE TEST VOLTAGE SHALL BE 500 VAC.

FIGURE 29. Use of a KCI characteristic name ending with an underline.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

SRS input from figure 28:

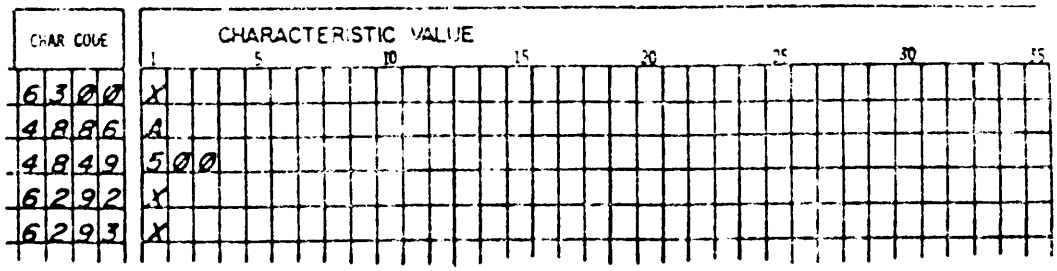

Resulting MSE paragraphs:

DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 of MIL-STD-202. (6300)

ALTITUDE SHALL BE IN ACCORDANCE WITH TEST CONDITION LETTER A OF METHOD 105 OF MIL-STD-202. (4886)

TEST VOLTAGE SHALL BE 500 VOLTS, AC (4849)

POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:

BETWEEN MUTUALLY INSULATED PARTS (6292)

BETWEEN ALL INSULATED PARTS AND GROUND (6293)

FIGURE 30. Example of "X" and value entries.

5.20.4 Lead-in statements. Certain codes shall be used for the purpose of generating lead-in statements when a desired characteristic name on the KCI is a subparagraph to another characteristic name. For example, when a different VOLTS, AC (code 4849) numeric value is required, other than that value specified in the base document, a test condition letter in accordance with Method 105 of MIL-STD-202 (code 4886) and Method 301 of MIL-STD-202 (code 6300) shall be specified (see figure 30).

5.21 Edit routine. Edit software is used to insure correct and complete characteristic code input. The edit data base is coded from material contained in each MIL-STD-35 dash-numbered part. The contents of the edit data base are compared to the characteristic codes of each SRS (to determine valid and invalid relationships between codes). Errors and omissions are determined and error messages are created. Many errors abort the generation of a MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

6. NOTES

(This section contains information of a general or explanatory nature which may be helpful, but is not mandatory).

6.1 Intended use. This standard covers the Automated Engineering Document Preparation System. This system is used to prepare Military Specification Exceptions (MSE) for the acquisition of nonstandard parts and materials in the generic names specified in Table I.

6.2 Issue of DoDISS. When this standard is used in acquisition, the issue of the DoDISS to be applicable to this solicitation must be cited in this solicitation (see 2.1.1 and 2.2).

6.3 Data requirements. The following Data Item Descriptions (DID'S) must be listed, as applicable, on the Contract Data Requirements List (DD Form 1423) when this standard is applied on a contract, in order to obtain the data, except where DoD FAR Supplement 27.475-1 exempts the requirement for a DD Form 1423.

Paragraph no.	Data requirement title	Applicable DID No.
4.3	Request for Military Specification Exceptions	DI-CMAN-8

The above DID's were those cleared as of the date of this standard. The current issue of DoD 5010.12-L, Acquisition Management System and Data Requirements Control List (AMSDL), must be researched to ensure that only current, cleared DID's are cited on the DD Form 1423.

6.4 Subject term (key word) listing.

AEDPS
Military Specification Exception
MSE

6.5 Changes from previous issue. Vertical lines or asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX A

KEYWORD CODE INDEX (KCI) AND STANDARD PARAGRAPH

10. GENERAL.

10.1 Scope. This appendix provides the codes to be used to generate a MSE. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To have a MSE generated by AEDPS, it is necessary to complete a SRS. TO determine which code should be entered on the SRS, find the subject in the index at the back of this standard or in the MIL-STD-35 dash-numbered part for the type of part needed. Find the keyword on the KCI and its associated code. Enter, on the SRS, the cede and the characteristic value required. Specific instructions on how to enter any one type of characteristic value are in section 5. This Appendix is not a mandatory part of the standard. The information contained herein is intended for guidance.

10.2 Automatic MSE data. Some statements, such as Scope, Altitude Rating, and Temperature Rating, will appear in the printed MSE without the requester making additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. This type of explanation is noted on the KCI as required.

10.3 Quality assurance previsions. A MSE may include quality assurance provision exceptions to the base document. The exceptions in the MSE shall be arranged in an orderly sequence to distinguish clearly between quality conformance inspection, qualification inspection, and first article inspection requirements. MIL-STD-961 is recommended for guidance in determining quality assurance provisions requirements.

10.3.1 Flow charts. To aid in correctly specifying exceptions to quality assurance provisions existing in the base document, flow charts are provided in this section describing the relationship of requirements within the following inspections:

a. qualification
b. first article
c. quality conformance
d. group A
e. group B
f. group C
g" group D
h. 100 percent

The flow charts are depicted on KCI pages opposite pages titled “STANDARD PARAGRAPH”. The flow chart is read from the top and depicts relevant information required to properly take exception to quality assurance provisions existing in the base-document. Each decision path leads to a characteristic code(s) which has a related paragraph on the opposite page.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX A

Characteristic codes and values, which best describe the desired exceptions to the base document, shall be entered on the SRS. When necessary to take exceptions to quality assurance provisions, the code for a decision path must be used and only those codes in that path can be used. Example: Code 5364 from the Quality Conformance flow chart must be used before other codes for exceptions to groups A, B, C or D inspections in that path can be used. Exclusive "OR" decisions will be encountered which require a choice of only one path to be followed. Additional codes may be selected when the decision path continues through the previous code selected. Codes with an asterisk (*) are mandatory when the immediate code above is selected. A "T" branch in the decision path denotes multiple paths may be utilized. It should be noted that one of the paths on the flow chart provides the means for specifying complete inspection tables.

10.3.2 Quality Assurance Tables. The modification table in Qualification, First Article, Group A, Group B, Group C, and Group D are used to make minor modifications to the corresponding table in the base document. Table XIII is used to modify the qualification inspection table in the base document, and impose it as First Article Inspection. Column one contains the test title for which table modification is required. The second column has the required modification; add, delete or sequence change. Only the words "add, delete, or sequence change" may be used in the second column. The third column has the title of the preceding test in the base document table when a test is added or a sequence change is required. The user of the document must be told when to perform a test when it is added by a MSE. Since the base document is imposed, only the test title(s) for which modification is required is entered using the modification table. When the "new table" is used, the titles of all tests to be performed in that inspection must be entered. A "new table" is a complete inspection table which replaces the corresponding inspection table in the base document. All tests shall be entered on the "new table" in the sequence in which they are to be performed.

In Quality Assurance Previsions, there are codes which reference the lot rejection number, number of allowable failures, or sampling plan shall be as specified in applicable Quality Assurance Table. Using First Article Inspection as specified in the MSE as an example, the following is an example of subgrouping, breaking up the whole sample into sample sizes per subgroup and allowable failures (see figures 31 and 32). Code 5269 specifies sample size shall be 5 units and code 5279 specifies that the allowable failures are specified in the table. Code 5295 completes the sentence with reference to inspection data. Code 5224 specifies that the first article inspection table shall be as specified in the generated document. Codes 5226, 5227, and 5228 specify that for Group 1, three sample units shall be subjected to the torque and end play tests and that one failure is allowed; Codes 5229, 5230, and 5231 specify that for Group 2, two sample units shall be subjected to the shaft runout and peak noise tests and zero failures allowed.

20. APPLICABLE DOCUMENTS. This section is not applicable to this appendix.

30. Keyword code index, codes and standard paragraphs and flow charts. This appendix details codes which may be-used for all dash part books.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

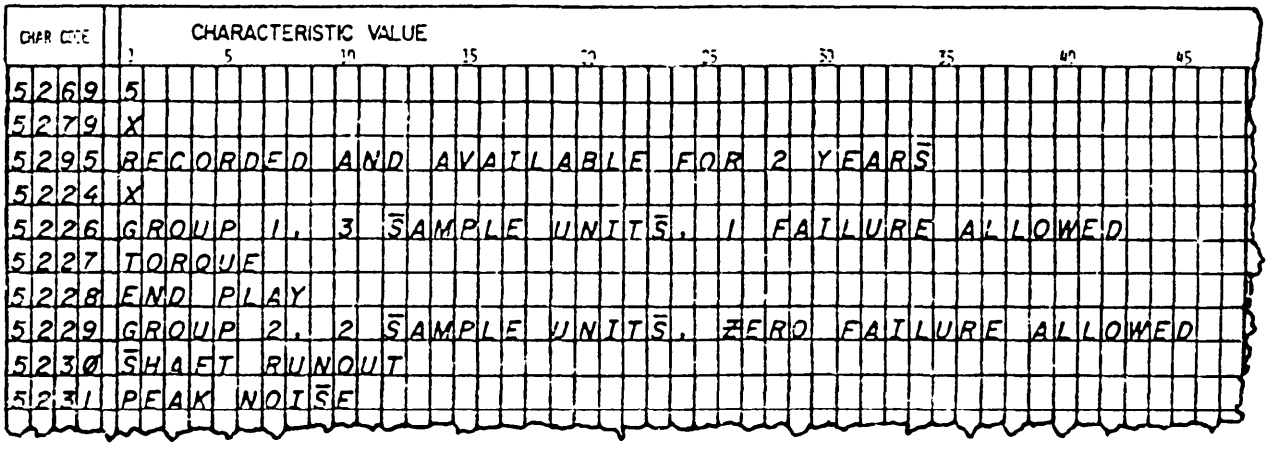


FIGURE 31. Example of first article inspection table entries.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

FIRST ARTICLE. WHEN REQUIRED BY THE PROCUREMENT DOCUMENT, ITEMS FURNISHED UNDER THIS DOCUMENT SHALL BE PRODUCTS WHICH HAVE PASSED THE FIRST ARTICLE INSPECTION.

FIRST ARTICLE INSPECTION.

FIRST ARTICLE INSPECTION. WHEN REQUIRED BY THE PROCUREMENT DOCUMENT, FIRST ARTICLE INSPECTION SHALL BE AS SPECIFIED HEREIN. INSPECTION SHALL BE PERFORMED AT A LABORATORY ACCEPTABLE TO THE PROCURING ACTIVITY, ON SAMPLE UNITS PRODUCED WITH EQUIPMENT AND PROCEDURES NORMALLY USED IN PRODUCTION.

FIRST ARTICLE SAMPLE. THE FIRST ARTICLE SAMPLE SHALL CONSIST OF 5 SAMPLE UNIT(S).

FIRST ARTICLE INSPECTION TABLE. THE FIRST ARTICLE INSPECTION TABLE SHALL BE AS FOLLOWS.

FIRST ARTICLE INSPECTION TABLE

TEST TITLE
GROUP 1, 3 SAMPLE UNITS, 1 FAILURE ALLOWED
TORQUE
END PLAY
GROUP 2, 2 SAMPLE UNITS, ZERO FAILURE ALLOWED
SHAFT RUNOUT
PEAK NOISE

FAILURES. ALLOWABLE FAILURES SHALL BE AS SPECIFIED IN THE FIRST ARTICLE INSPECTION TABLE. FAILURES GREATER THAN THE NUMBER ALLOWED SHALL BE CAUSE FOR REFUSAL TO GRANT FIRST ARTICLE APPROVAL.

INSPECTION DATA. FIRST ARTICLE INSPECTION DATA SHALL BE RECORDED AND AVAILABLE FOR 2 YEARS.

FIGURE 32. Example of MSE print of figure 31 SRS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX A

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
30.1 QUALITY ASSURANCE PROVISIONS (SEE 10.3)	
PER BASE DOCUMENT EXCEPT HEREIN	
NOTE: AUTOMATIC WHEN CODES 1006 AND 0700 ARE USED.	
30.2 MATERIAL INSPECTION (SELECT ONE)	
BASE DOCUMENT EXCEPT ____	5352
VERIFICATION.	5350
CERTIFICATION.	5353
NOTE: REFERENCE MIL-STD-961 FOR GUIDANCE IN DETERMINING QA REQUIREMENTS.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

QUALITY ASSURANCE PROVISIONS. THE QUALITY ASSURANCE PROVISIONS SHALL, BE IN ACCORDANCE WITH (THE BASE DOCUMET) EXCEPT AS SPECIFIED HEREIN. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.

5352 MATERIAL INSPECTION. MATERIAL Inspection SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5352.

5350 MATERIAL INSPECTION. MATERIAL INSPECTION SHALL CONSIST OF VERIFICATION THAT THE MATERIALS USED IN FABRICATING THE ITEMS FURNISHED UNDER 'THIS DOCUMENT, ARE IN ACCORDANCE WITH THE APPLICABLE REFERENCED SPECIFICATIONS OR REQUIREMENT'S PRIOR TO SUCH FABRICATION.

5353 MATERIAL INSPECTION. MATERIAL Inspection SHALL CONSIST OF CERTIFICATION, SUPPORTED BY VERIFYING DATA THAT THE MATERIALS SPECIFIED FOR USE ARE IN ACCORDANCE WITH THE APPLICABLE REFERENCED SPECIFICATIONS OR REQUIREMENTS PRIOR TO SUCH FABRICATION, UNLESS OTHERWISE SPECIFIED HEREIN.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
30.3 INSPECTION CONDITIONS (SELECT ONE)	
PER (DOC DES)	7525
AS FOLLOWS:	4931
TEMPERATURE (DEGREES CELSIUS)	4910
TOLERANCE (DEGREES CELSIUS)	4911
LOW PRESSURE (SELECT ONE)	
(TORR)	4914
(KILOPASCALS)	4912
HIGH PRESSURE (SELECT ONE)	
(TORR)	4915
(KILOPASCALS)	4913
LOW HUMIDITY (PERCENT)	4917
HIGH HUMIDITY (PERCENT)	4918
30.4 QUALIFICATION	
PER BASE DOCUMENT.	5299

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.


APPENDIX A

CHAR CODE	STANDARD PARAGRAPH
7525	INSPECTION CONDITIONS. UNLESS OTHERWISE SPECIFIED HEREIN, INSPECTION CONDITIONS SHALL BE IN ACCORDANCE WITH 7525.
4931	INSPECTION CONDITIONS. UNLESS OTHERWISE SPECIFIED ALL MEASUREMENTS AND TESTS SHALL BE AT THE FOLLOWING CONDITIONS:
4910	THE TEST TEMPERATURE SHALL BE 4910 DEGREES CELSIUS.
4911	THE TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 4911 DEGREES CELSIUS.
4914	THE LOW AIR PRESSURE SHALL BE 4914 TORR.
4912	THE LOW PRESSURE SHALL BE 4912 KILOPASCAL(S).
4915	THE HIGH AIR PRESSURE SHALL BE 4915 TORR.
4913	THE HIGH AIR PRESSURE SHALL BE 4913 KILOPASCAL(S).
4917	THE LOW RELATIVE HUMIDITY SHALL BE 4917 PERCENT.
4918	THE HIGH RELATIVE HUMIDITY SHALL BE 4918 PERCENT.
5299	QUALIFICATION. ITEMS FURNISHED UNDER THIS DOCUMENT SHALL BE SUPPLIED BY MANUFACTURERS WHO ARE QUALIFIED TO SUPPLY ITEMS SPECIFIED IN THE BASE DOCUMENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

30.4
(CONT)

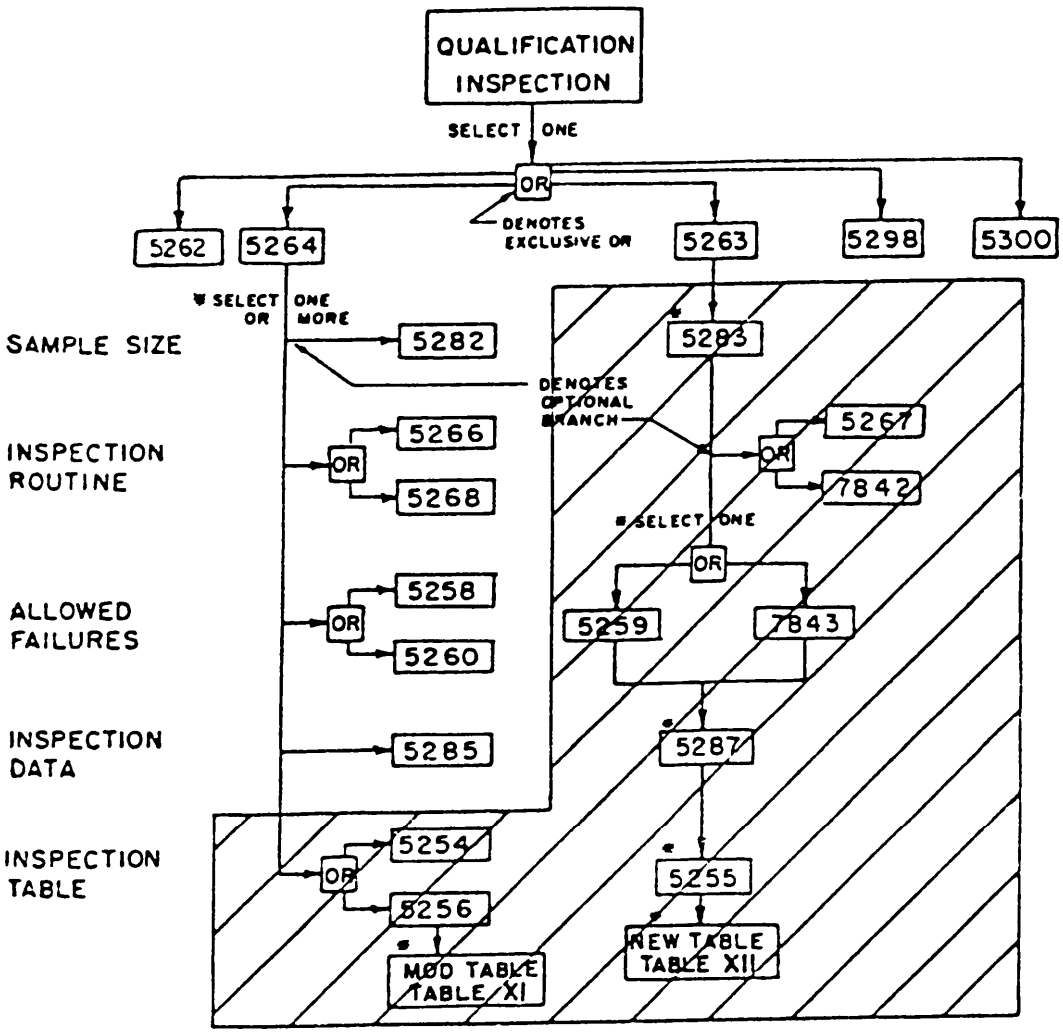


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
5262	QUALIFICATION INSPECTION. QUALIFICATION INSPECTION SHALL BE PERFORMED AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5262.
5264	QUALIFICATION INSPECTION. QUALIFICATION INSPECTION SHALL BE PERFORMED AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT AS SPECIFIED HEREIN.
5263	QUALIFICATION INSPECTION. QUALIFICATION INSPECTION SHALL BE AS SPECIFIED HEREIN. INSPECTION SHALL BE PERFORMED AT A LABORATORY ACCEPTABLE TO THE PROCURING ACTIVITY, ON SAMPLE UNITS PRODUCED WITH EQUIPMENT AND PROCEDURES NORMALLY USED IN PRODUCTION.
5298	QUALIFICATION INSPECTION. QUALIFICATION INSPECTION IS NOT REQUIRED FOR ITEMS FURNISHED UNDER THIS DOCUMENT.
5300	QUALIFICATION INSPECTION. THE REQUIREMENT FOR LISTING ON THE BASE DOCUMENT PRODUCTS LIST (QPL) IS WAIVED.
5282	QUALIFICATION SAMPLE. THE QUALIFICATION SAMPLE SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5282.
5266	QUALIFICATION INSPECTION ROUTINE. THE QUALIFICATION Inspection ROUTINE SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5266.
5268	QUALIFICATION INSPECTION ROUTINE. THE QUALIFICATION SAMPLE SHALL BE SUBJECTED TO THE INSPECTION ROUTINE OF GROUP(S) 5268 INSPECTION TABLE(S).
5258	FAILURES. FAILURES SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5258.
5260	FAILURES. ALLOWABLE FAILURES SHALL BE AS SPECIFIED IN THE QUALIFICATION INSPECTION TABLE. FAILURES GREATER THAN THE NUMBER ALLOWED SHALL BE CAUSE FOR REFUSAL TO GRANT QUALIFICATION APPROVAL.
5285	Inspection DATA. QUALIFICATION INSPECTION DATA SHALL BE RECORDED AND MADE AVAILABLE AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5285.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEWORD CODE INDEX (KCI)

30.4
(CONT)

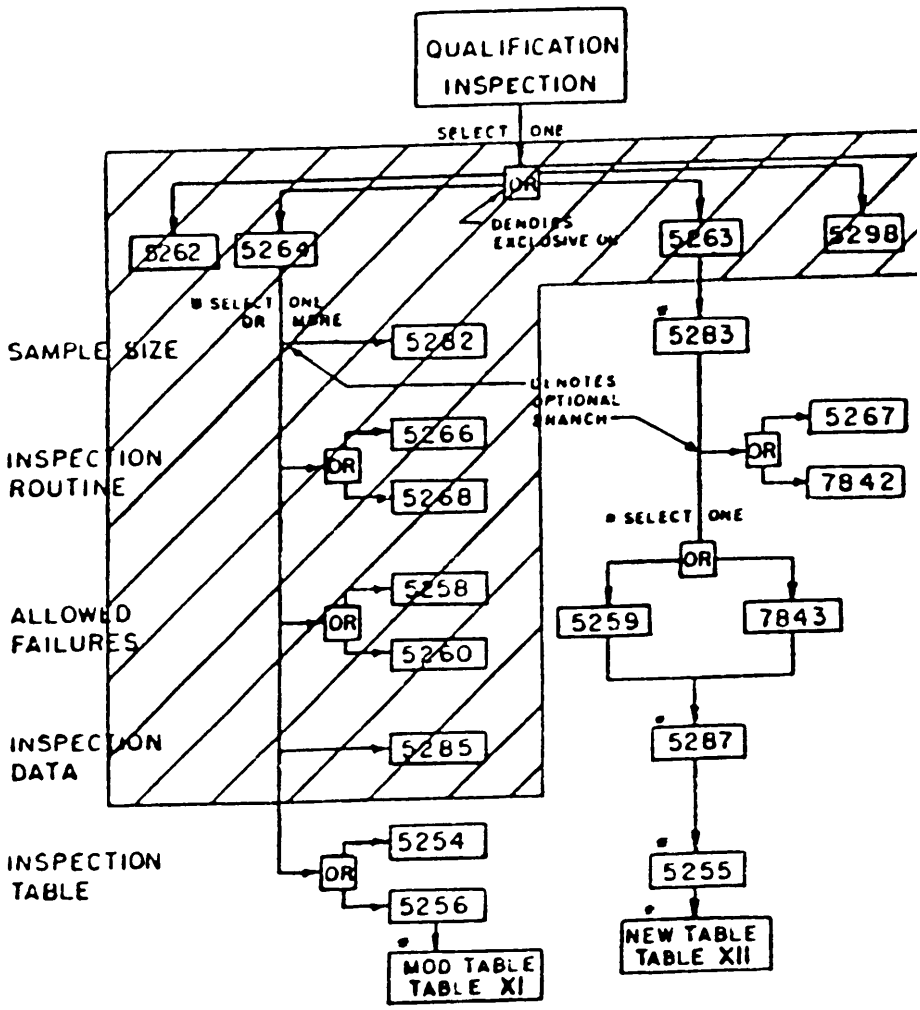

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

5254 QUALIFICATION INSPECTION TABLE. THE QUALIFICATION INSPECTION TABLE SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5254.

5256 QUALIFICATION INSPECTION TABLE. THE QUALIFICATION INSPECTION TABLE SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, SUBJECT TO THE FOLLOWING MODIFICATIONS:

(REFER TO TABLE XI)

5283 QUALIFICATION SAMPLE. THE QUALIFICATION SAMPLE SHALL CONSIST OF 5283 SAMPLE UNIT(S).

5267 QUALIFICATION INSPECTION ROUTINE SAMPLE UNITS SHALL BE SUBJECTED TO THE TEST(S) SPECIFIED IN THE QUALIFICATION INSPECTION TABLE, IN THE ORDER SHOWN.

7842 QUALIFICATION INSPECTION ROUTINE. THE QUALIFICATION SAMPLE SHALL BE SUBJECTED TO THE INSPECTION ROUTINE OF GROUP(S) 7842 INSPECTION TABLE(S).

5259 FAILURES. 5259 FAILURE(S) SHALL BE ALLOWED. FAILURES GREATER THAN THE NUMBER OF THOSE ALLOWED SHALL BE CAUSE FOR REFUSAL TO GRANT QUALIFICATION APPROVAL.

7843 FAILURES. ALLOWABLE FAILURES SHALL BE AS SPECIFIED IN THE QUALIFICATION INSPECTION TABLE. FAILURES GREATER THAN THE NUMBER ALLOWED SHALL BE CAUSE FOR REFUSAL TO GRANT QUALIFICATION APPROVAL.

5287 INSPECTION DATA. QUALIFICATION Inspection DATA SHALL BE 5287.


5255 QUALIFICATION INSPECTION TABLE. THE QUALIFICATION INSPECTION TABLE SHALL BE AS FOLLOWS:

(REFER TO TABLE XII)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD INDEX (KCI)

30.5

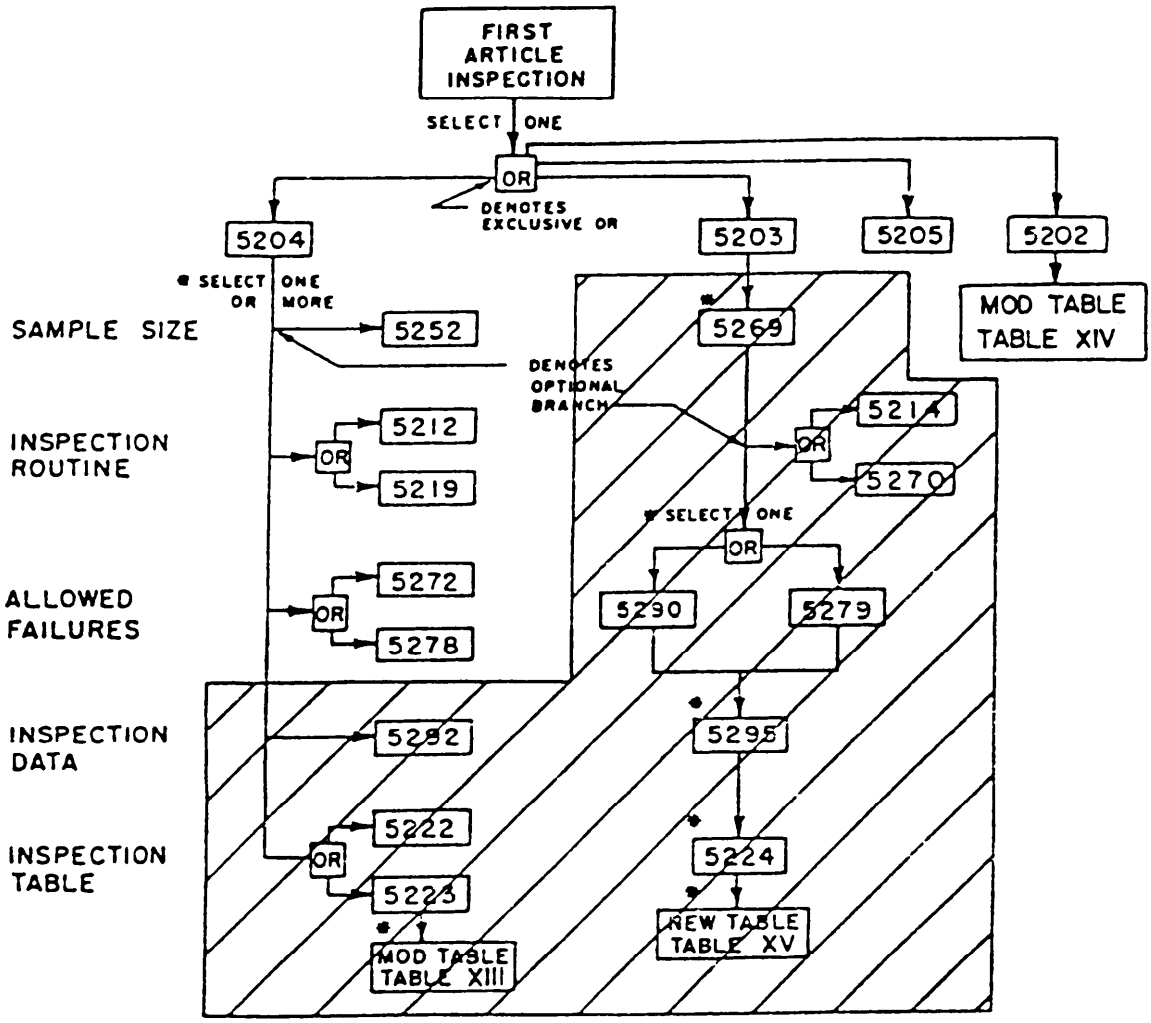

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.


APPENDIX A

CHAR CODE	STANDARD PARAGRAPH
5204	FIRST ARTICLE INSPECTION. WHEN REQUIRED BY THE PROCUREMENT DOCUMENT, FIRST ARTICLE INSPECTION SHALL BE PERFORMED AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT AS SPECIFIED HEREIN.
5203	FIRST ARTICLE INSPECTION. WHEN REQUIRED BY THE PROCUREMENT DOCUMENT, FIRST ARTICLE INSPECTION SHALL BE AS SPECIFIED HEREIN. INSPECTION SHALL BE PERFORMED AT A LABORATORY ACCEPTABLE TO THE PROCURING ACTIVITY, ON SAMPLE UNITS PRODUCED WITH EQUIPMENT AND PROCEDURES NORMALLY USED IN PRODUCTION.
5205	FIRST ARTICLE INSPECTION. WHEN REQUIRED BY THE PROCUREMENT DOCUMENT, FIRST ARTICLE INSPECTION SHALL BE PERFORMED AS SPECIFIED IN THE BASE DOCUMENT.
5202	FIRST ARTICLE INSPECTION. WHEN REQUIRED BY THE PROCUREMENT DOCUMENT, FIRST ARTICLE INSPECTION SHALL BE PERFORMED IN ACCORDANCE WITH THE FIRST ARTICLE MODIFICATION TABLE: (REFER TO TABLE XIV) NOTE: THIS TABLE (XIV) IS USED TO MODIFY THE QUALIFICATION INSPECTION TABLE OF THE BASE DOCUMENT AS THE TESTS FOR FIRST ARTICLE INSPECTION. NOTE SHOW WITH THE TABLE PRINTS IN THE MSE.
5252	FIRST ARTICLE SAMPLE. THE FIRST ARTICLE SAMPLE SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5252.
5212	FIRST ARTICLE INSPECTION ROUTINE. FIRST ARTICLE INSPECTION ROUTINE SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5212.
5219	FIRST ARTICLE INSPECTION ROUTINE. THE FIRST ARTICLE SAMPLE SHALL BE SUBJECTED TO THE INSPECTION ROUTINE OF GROUP(S) 5219 INSPECTION TABLE(S).
5272	FAILURES. FAILURES SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5272.
5278	FAILURES. 5278 FAILURE(S) SHALL BE ALLOWED. FAILURES GREATER THAN THE NUMBER ALLOWED SHALL BE CAUSE FOR REFUSAL TO GRANT APPROVAL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

30.5
(CONT)

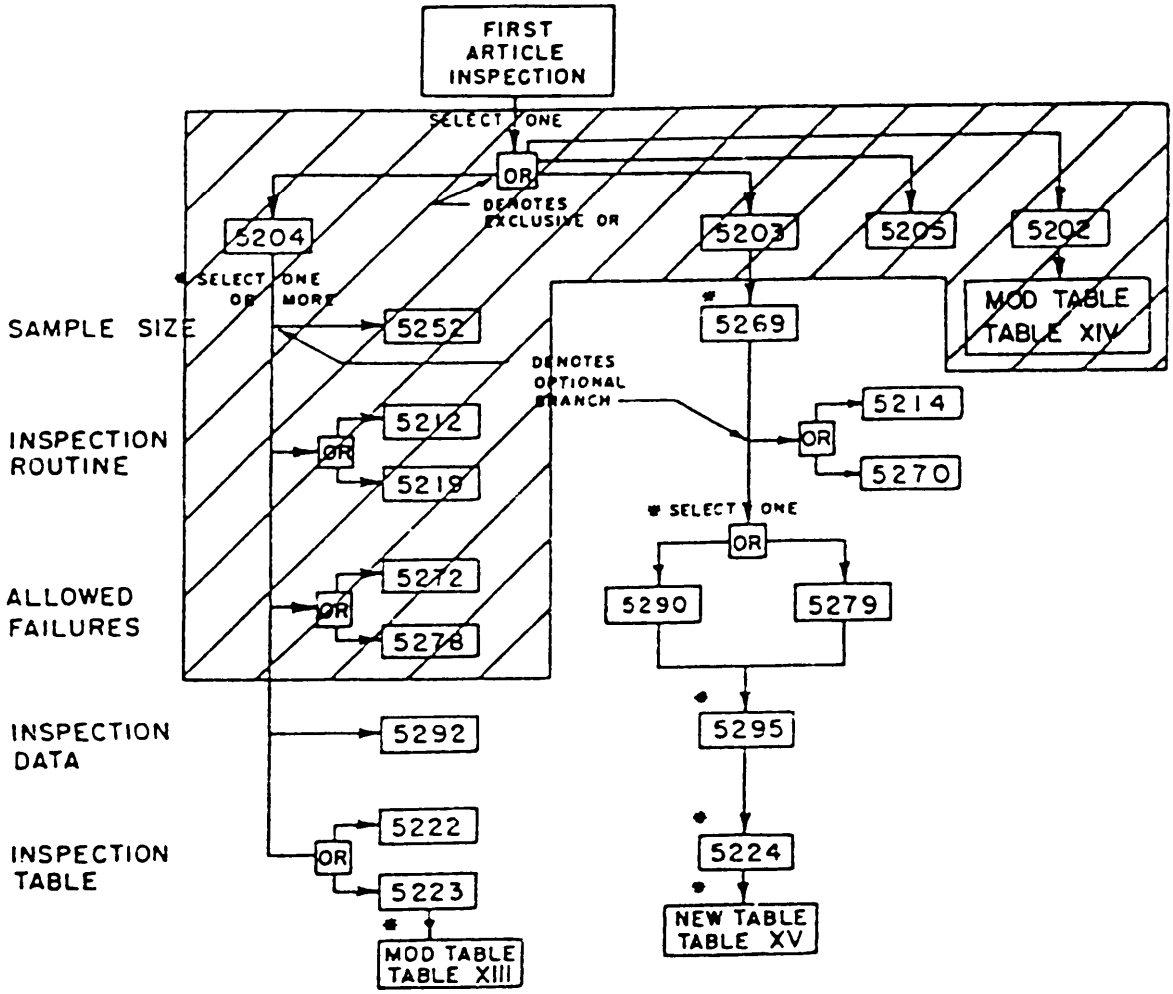


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
5292	INSPECTION DATA. FIRST ARTICLE INSPECTION DATA SHALL BE RECORDED AND MADE AVAILABLE AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5292.
5222	FIRST ARTICLE INSPECTION TABLE. THE FIRST ARTICLE INSPECTION TABLE SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5222.
5223	FIRST ARTICLE INSPECTION TABLE. THE FIRST ARTICLE INSPECTION TABLE SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, SUBJECT TO THE FOLLOWING MODIFICATIONS : (REFER TO TABLE XIII)
5269	FIRST ARTICLE SAMPLE. THE FIRST ARTICLE SAMPLE SHALL CONSIST OF 5269 SAMPLE UNIT(S).
5214	FIRST ARTICLE INSPECTION ROUTINE. SAMPLE UNITS SHALL BE SUBJECTED TO THE INSPECTION SPECIFIED IN THE FIRST ARTICLE INSPECTION TABLE, IN THE ORDER SHOWN.
5270	FIRST ARTICLE INSPECTION ROUTINE. THE FIRST ARTICLE SAMPLE SHALL BE SUBJECTED TO THE INSPECTION ROUTINE OR GROUP(S) 5270 INSPECTION TABLE(S).
5290	FAILURES. 5290 FAILURE(S) SHALL BE ALLOWED. FAILURE GREATER THAN THE NUMBER ALLOWED SHALL BE CAUSE FOR REFUSAL TO GRANT FIRST ARTICLE APPROVAL.
5279	FAILURES. ALLOWABLE FAILURES SHALL BE SPECIFIED IN THE FIRST ARTICLE INSPECTION TABLE. FAILURES GREATER THAN THE NUMBER ALLOWED SHALL BE CAUSE FOR REFUSAL TO GRANT FIRST ARTICLE APPROVAL.
5295	INSPECTION DATA. FIRST ARTICLE INSPECTION DATA SHALL BE 5295.
5224	FIRST ARTICLE INSPECTION TABLE. THE FIRST ARTICLE INSPECTION TABLE SHALL BE AS FOLLOWS: (REFER TO TABLE XV)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

30.6

KEYWORD CODE INDEX (KCI)

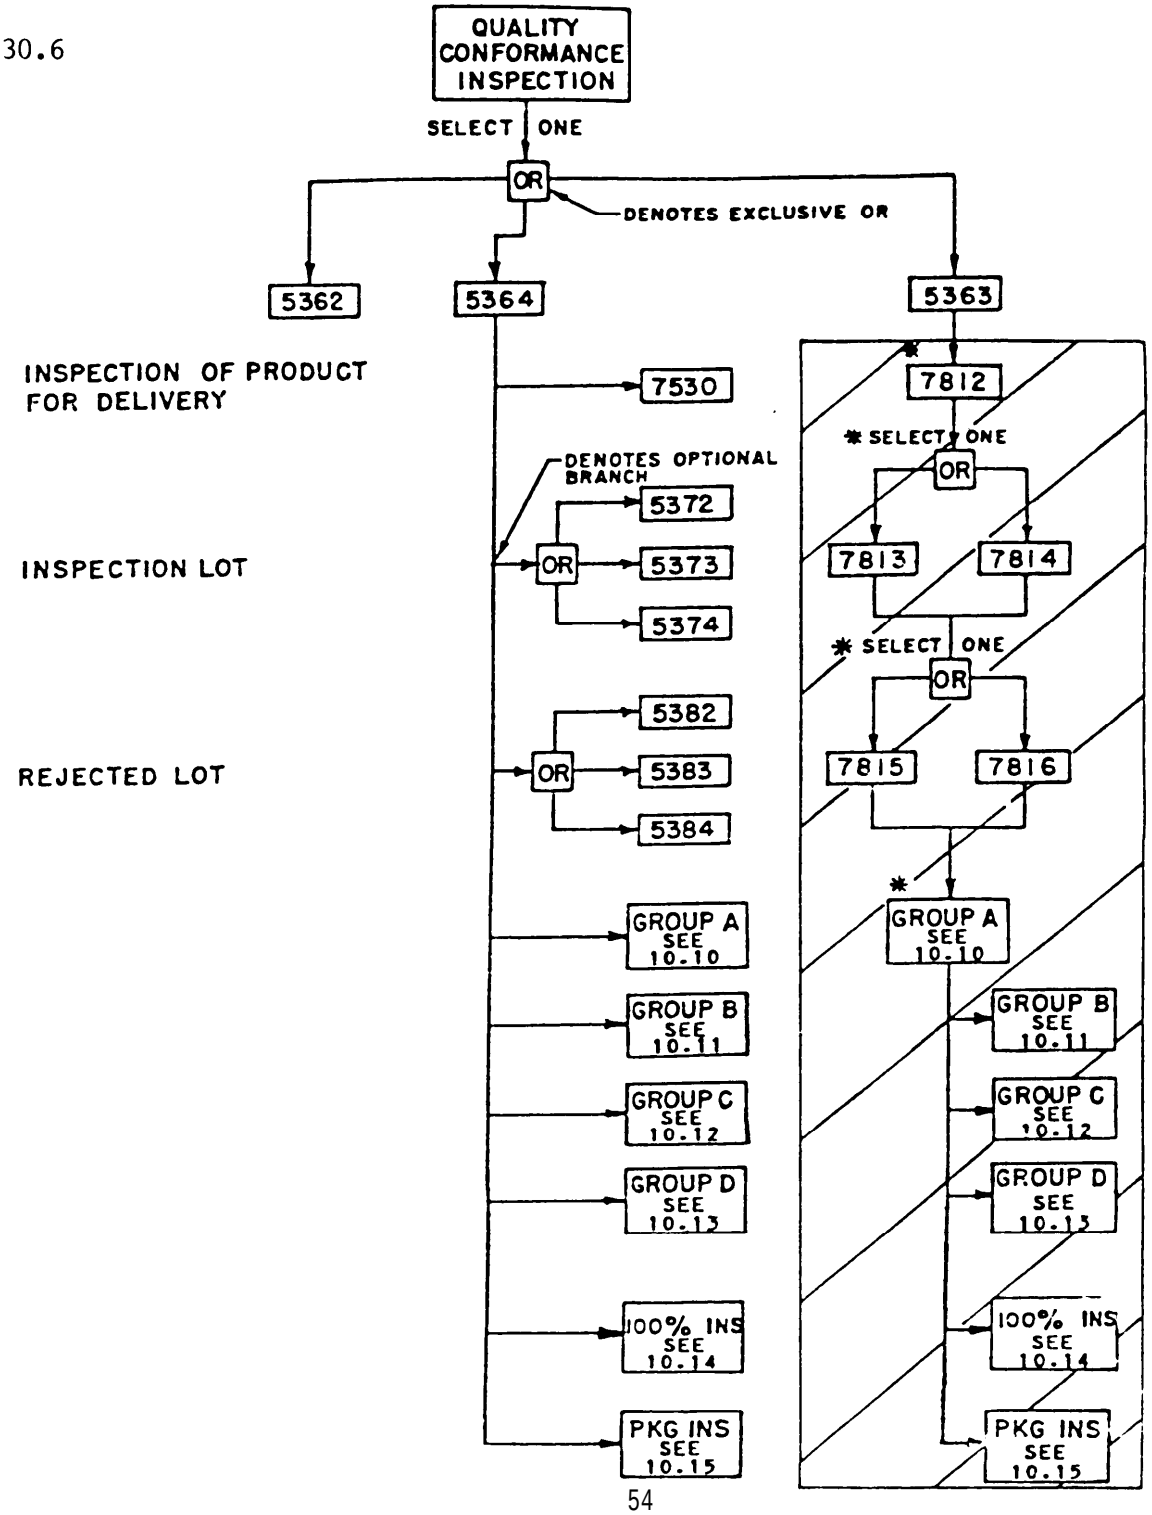


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
5362	QUALITY CONFORMANCE INSPECTION. THE QUALITY CONFORMANCE INSPECTION SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5362.
5364	QUALITY CONFORMANCE INSPECTION. THE QUALITY CONFORMANCE INSPECTION SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT AS SPECIFIED HEREIN.
5363	QUALITY CONFORMANCE INSPECTION. THE QUALITY CONFORMANCE SHALL BE AS SPECIFIED HEREIN.
7530	INSPECTION OF PRODUCT FOR DELIVERY. INSPECTION OF PRODUCT FOR DELIVERY SHALL CONSIST OF GROUP(S) 7530 INSPECTION.
5372	INSPECTION LOT. AN INSPECTION LOT SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5372.
5373	INSPECTION LOT. AN INSPECTION LOT SHALL CONSIST OF ITEMS PRODUCED UNDER ESSENTIALLY THE SAME CONDITIONS, AND OFFERED FOR INSPECTION AT THE SAME TIME.
5374	INSPECTION LOT AN INSPECTION LOT SHALL CONSIST OF 5374.
5382	REJECTED LOT. REJECTED LOTS MAY BE RESUBMITTED UNDER THE CONDITIONS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5382.
5383	REJECTED LOTS. IF AN INSPECTION LOT IS REJECTED, THE SUPPLIER MAY WITHDRAW THE LOT, REWORK IT TO CORRECT THE DEFECTS, OR SCREEN OUT THE DEFECTIVE UNITS AS APPLICABLE, AND REINSPECT. SUCH LOTS SHALL BE SEPARATE FROM NEW LOTS, AND SHALL BE CLEARLY IDENTIFIED AS REINSPECTED LOTS. REJECTED LOTS SHALL BE REINSPECTED, USING TIGHTENED INSPECTION. A LOT SHALL NOT BE RESUBMITTED MORE THAN ONE TIME.
5384	REJECTED LOTS. REJECTED LOTS SHALL NOT BE RESUBMITTED FOR INSPECTION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

30.6 (CONT)

KEYWORD CODE INDEX (KCI)

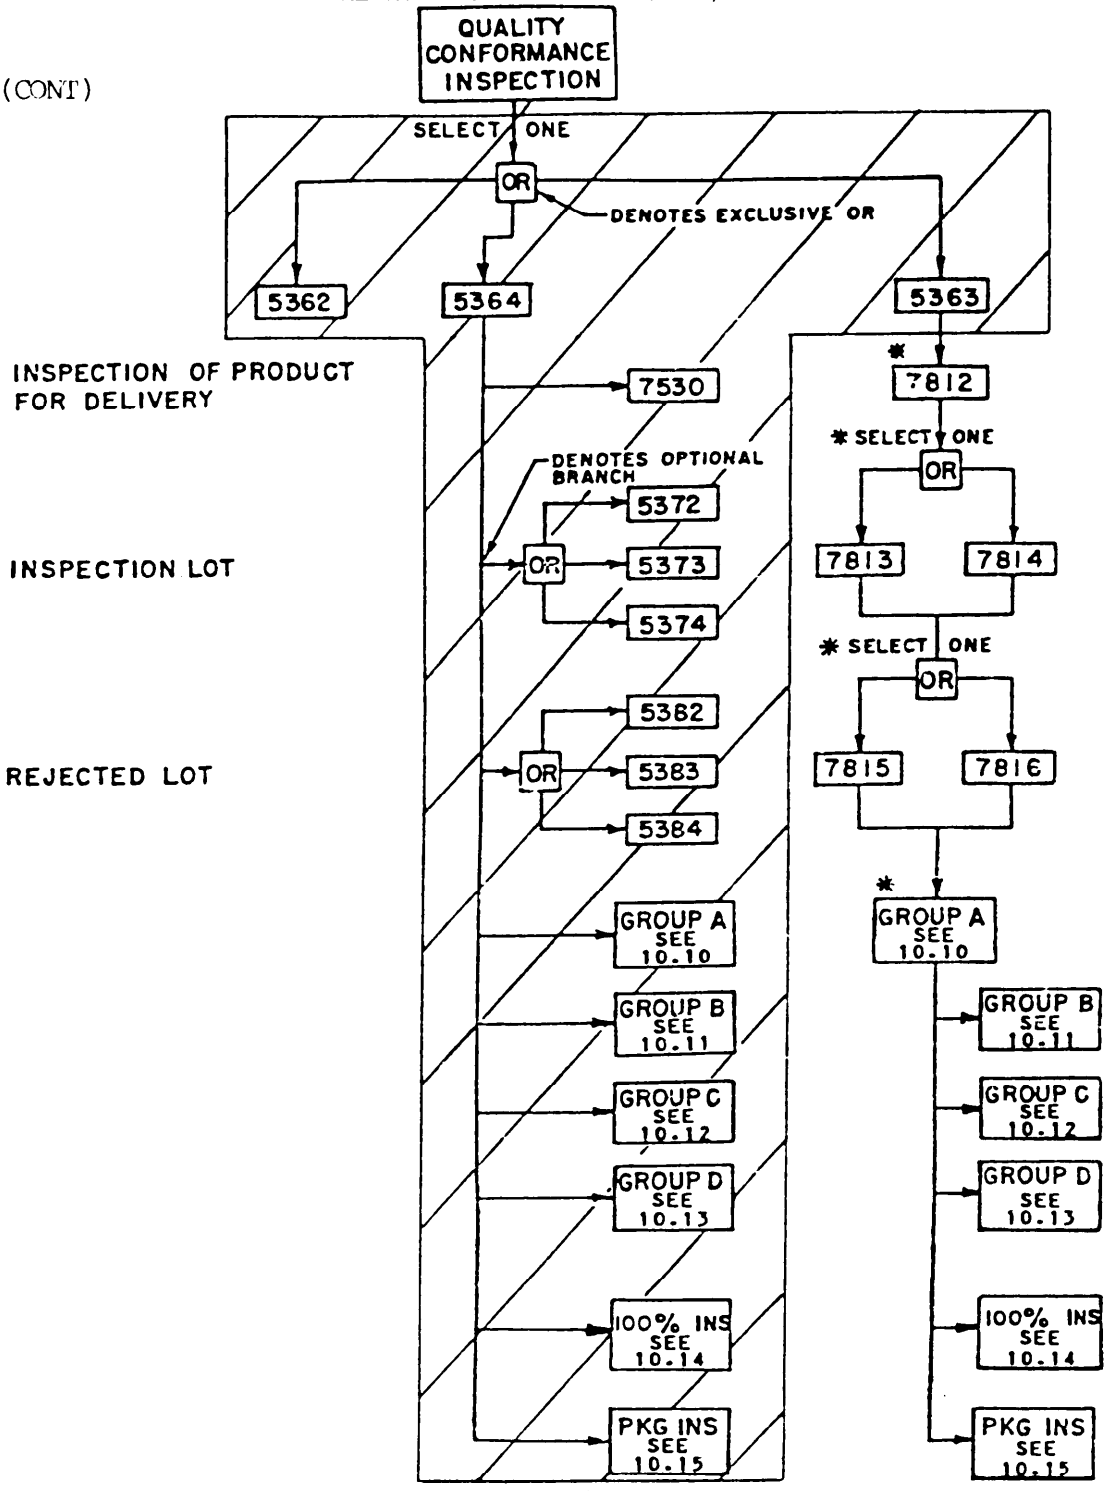

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

7812 INSPECTION OF PRODUCT FOR DELIVERY. INSPECTION OF PRODUCT FOR DELIVERY SHALL CONSIST OF GROUP(S) 7812 INSPECTION.

7813 INSPECTION LOT. AN INSPECTION LOT SHALL CONSIST OF ITEMS PRODUCED) UNDER ESSENTIALLY THE SAME CONDITIONS, AND OFFERED FOR INSPECTION AT THE SAME TIME.

7814 INSPECTION LOT. AN INSPECTION LOT SHALL CONSIST OF 7814.


7815 REJECTED LOTS. IS AN INSPECTION LOT IS REJECTED, THE SUPPLIER MAY WITHDRAW THE LOT, REWORK IT TO CORRECT THE DEFECTS, OR SCREEN OUT THE DEFECTIVE UNITS AS APPLICABLE, AND REINSPECT. SUCH LOTS SHALL BE SEPARATE FROM NEW LOTS AND SHALL BE REINSPECTED, USING TIGHTENED INSPECTION. A LOT SHALL NOT BE RESUBMITTED MORE THAN ONE TIME.

7816 REJECTED LOTS. REJECTED LOTS SHALL NOT BE RESUBMITED FOR INSPECTION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

30.7

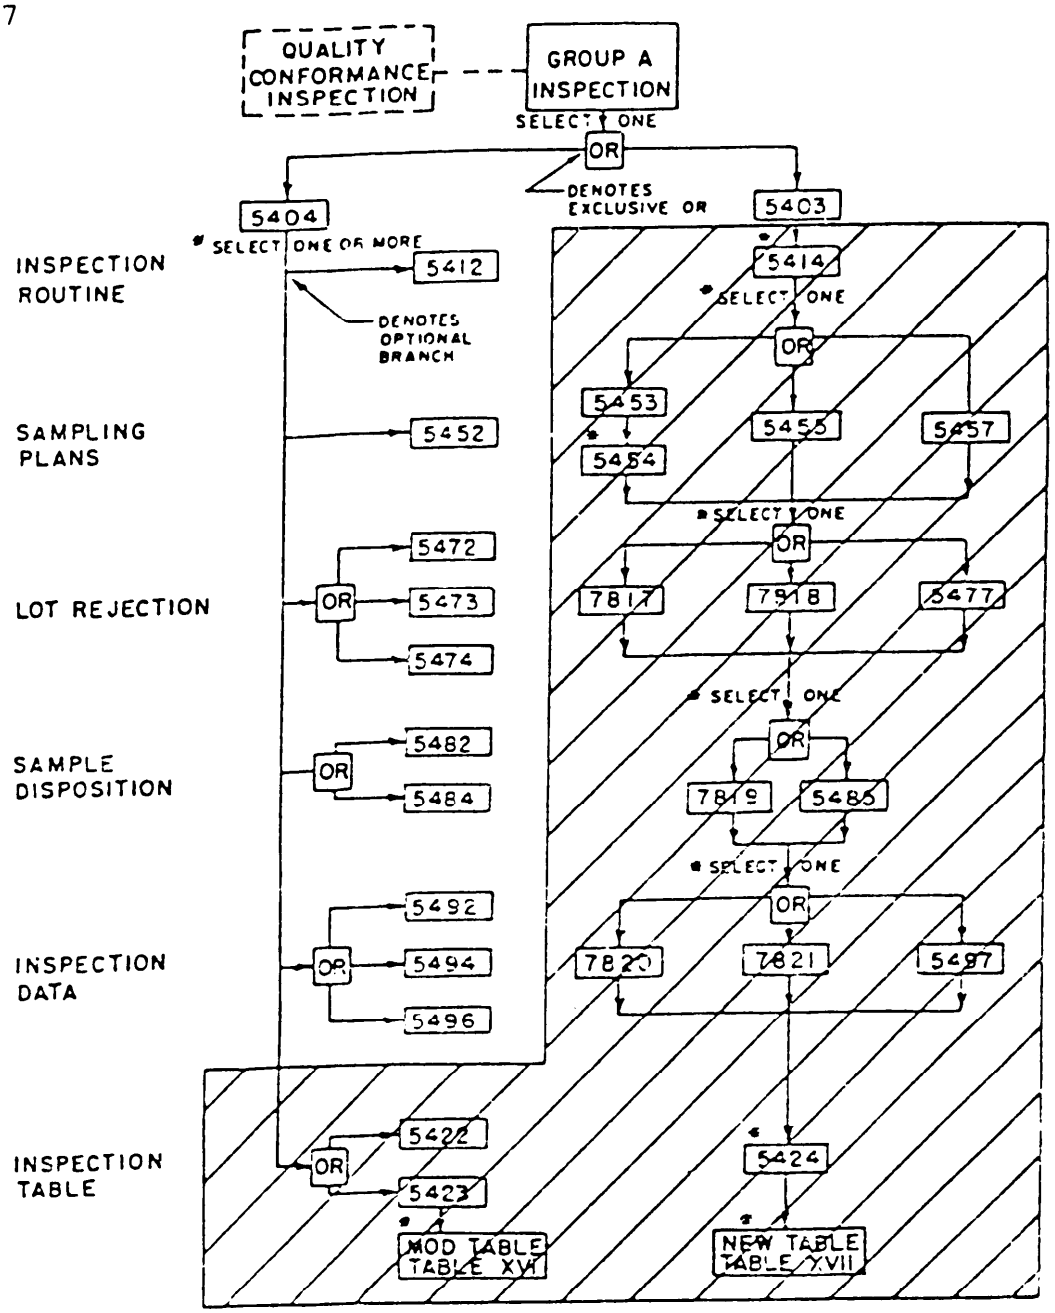

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

5404 GROUP A INSPECTION. GROUP A INSPECTION SHALL BE PERFORMED AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT AS SPECIFIED HEREIN.

5403 GROUP A INSPECTION. GROUP A INSPECTION SHALL BE PERFORMED AS SPECIFIED HEREIN.

5412 GROUP A INSPECTION ROUTINE. GROUP A INSPECTION ROUTINE SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5412.

5452 GROUP A SAMPLING PLAN. THE GROUP A INSPECTION SAMPLING PLAN SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5452.

5472 LOT REJECTION. LOT REJECTION SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5472.

5473 LOT REJECTION. THE INSPECTION LOT SHALL BE **REJECTED** IF THE NUMBER OF DEFECTIVE UNITS IS GREATER THAN THE NUMBER ALLOWED.

5474 LOT REJECTION. THE INSPECTION LOT SHALL BE REJECTED IF MORE THAN 5474 PERCENT OF THE UNITS INSPECTED ARE DEFECTIVE.

5482 DISPOSITION OF SAMPLE UNITS. THE DISPOSITION OF SAMPLE UNITS HAVE BEEN SUBJECTED TO THE GROUP A INSPECTION SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5482.

5484 DISPOSITION OF SAMPLE UNITS. SAMPLE UNITS THAT HAVE BEEN SUBJECTED TO THE GROUP A INSPECTION SHALL NOT BE DELIVERED ON THE CONTRACT OR ORDER.

5492 INSPECTION DATA. GROUP A INSPECTION DATA SHALL BE RECORDED AND MADE AVAILABLE TO THE PROCURING ACTIVITY AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5492.


5494 INSPECTION DATA. GROUP A INSPECTION DATA SHALL BE RECORDED AND ONE COPY BE SENT TO THE PROCURING ACTIVITY.

5496 INSPECTION DATA. GROUP A Inspection DATA SHALL BE **RECORDED** AND MADE AVAILABLE TO THE PROCURING ACTIVITY FOR 5496 MONTHS AFTER DELIVERY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

30.7
(CONT)

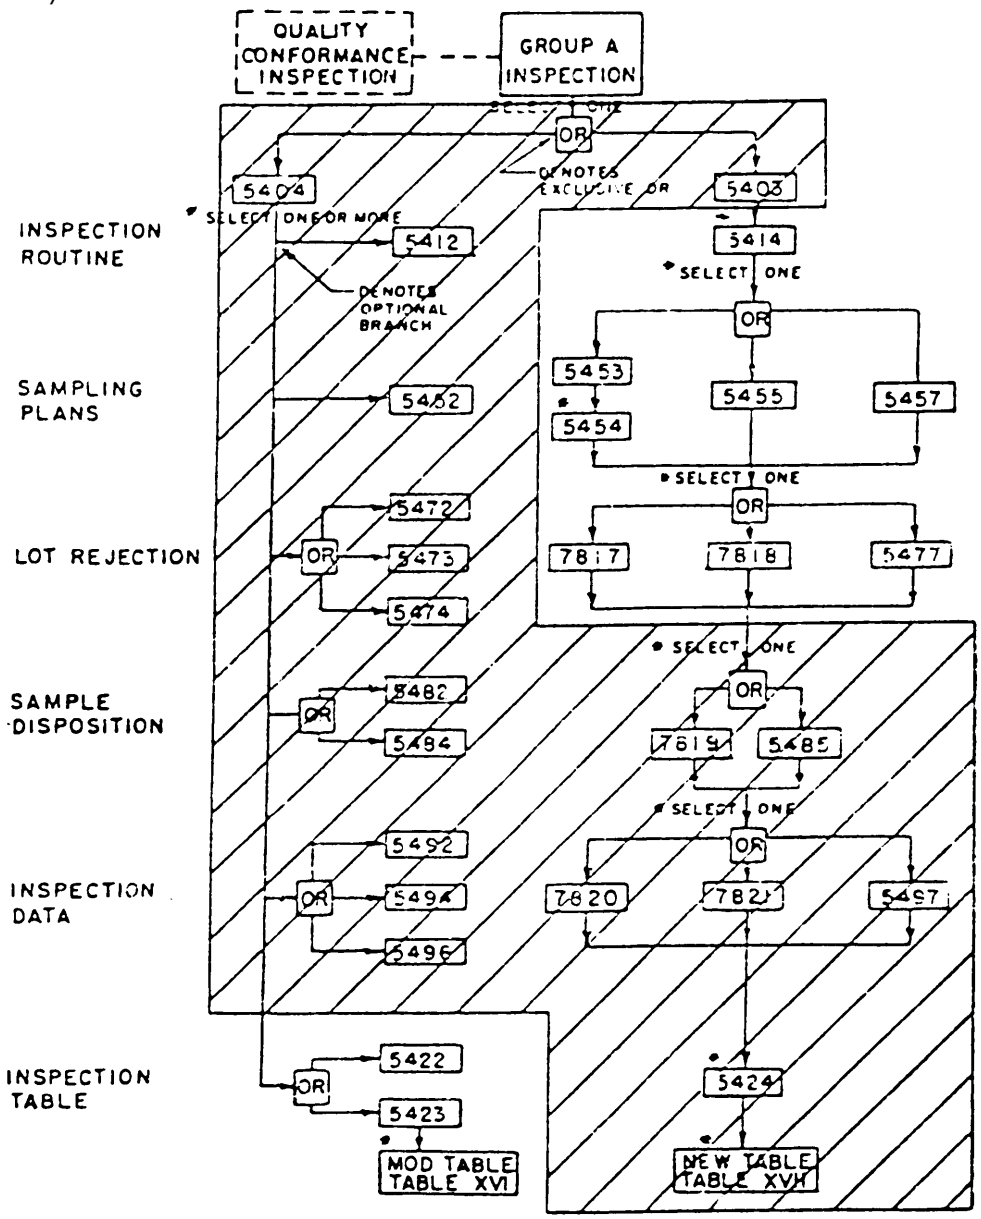

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX A


CHAR CODE	STANDARD PARAGRAPH
5422	GROUP A INSPECTION TABLE. THE GROUP A INSPECTION TABLE SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5422.
5423	GROUP A INSPECTION TABLE. THE GROUP A INSPECTION TABLE SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, SUBJECT TO THE FOLLOWING MODIFICATIONS: (REFER TO TABLE XVI)
5414	GROUP A Inspection ROUTINE. SAMPLE UNITS SHALL BE SUBJECTED TO THE INSPECTION(S) SPECIFIED IN THE GROUP A INSPECTION TABLE, IN THE ORDER SHOWN.
5453 5454	GROUP A SAMPLING PLAN. STATISTICAL SAMPLING AND INSPECTION SHALL BE IN ACCORDANCE WITH THE MIL-STD-105, FOR NORMAL INSPECTION, SINGLE SAMPLING. THE INSPECTION LEVEL SHALL BE 5453 AND THE ACCEPTABLE QUALITY LEVEL (AQL) SHALL BE 5454.
5455	GROUP A SAMPLING PLAN. THE GROUP A Inspection SAMPLING PLAN SHALL BE. AS SPECIFIED IN THE SUBGROUP HEADINGS IN THE GROUP A INSPECTION TABLE. THE SAMPLING PLAN SPECIFIED IN EACH SUBGROUP HEADING SHALL BE APPLICABLE TO ALL Inspection IN THAT SUBGROUP. WHEN AN INPECTION LEVEL AND ACCEPTABLE QUALITY LEVEL (AQL) IS SPECIFIED THE SAMPLING PLAN SHALL BE AS SPECIFIED IN MIL-STD-105 FOR NORMAL INSPECTION, SINGLE SAMPLING.
5457	GROUP A SAMPLING PLAN. THE GROUP A INSPECTION SAMPLING PLAN SHALL 5457.
7817	LOT REJECTION. THE INSPECTION LOT SHALL BE REJECTED IF THE NUMBER OF DEFECTIVE UNITS IS GREATER THAN THE NUMBER ALLOWED.
7818	LOT REJECTION. THE INSPECTION LOT SHALL BE REJECTED IF MORE THAN 7818 PERCENT OF THE UNITS INSPECTED ARE DEFECTIVE.
5477	LOT REJECTION. THE INSPECTION LOT SHALL, BE REJECTED IF 5477.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

30.7

(CONT)

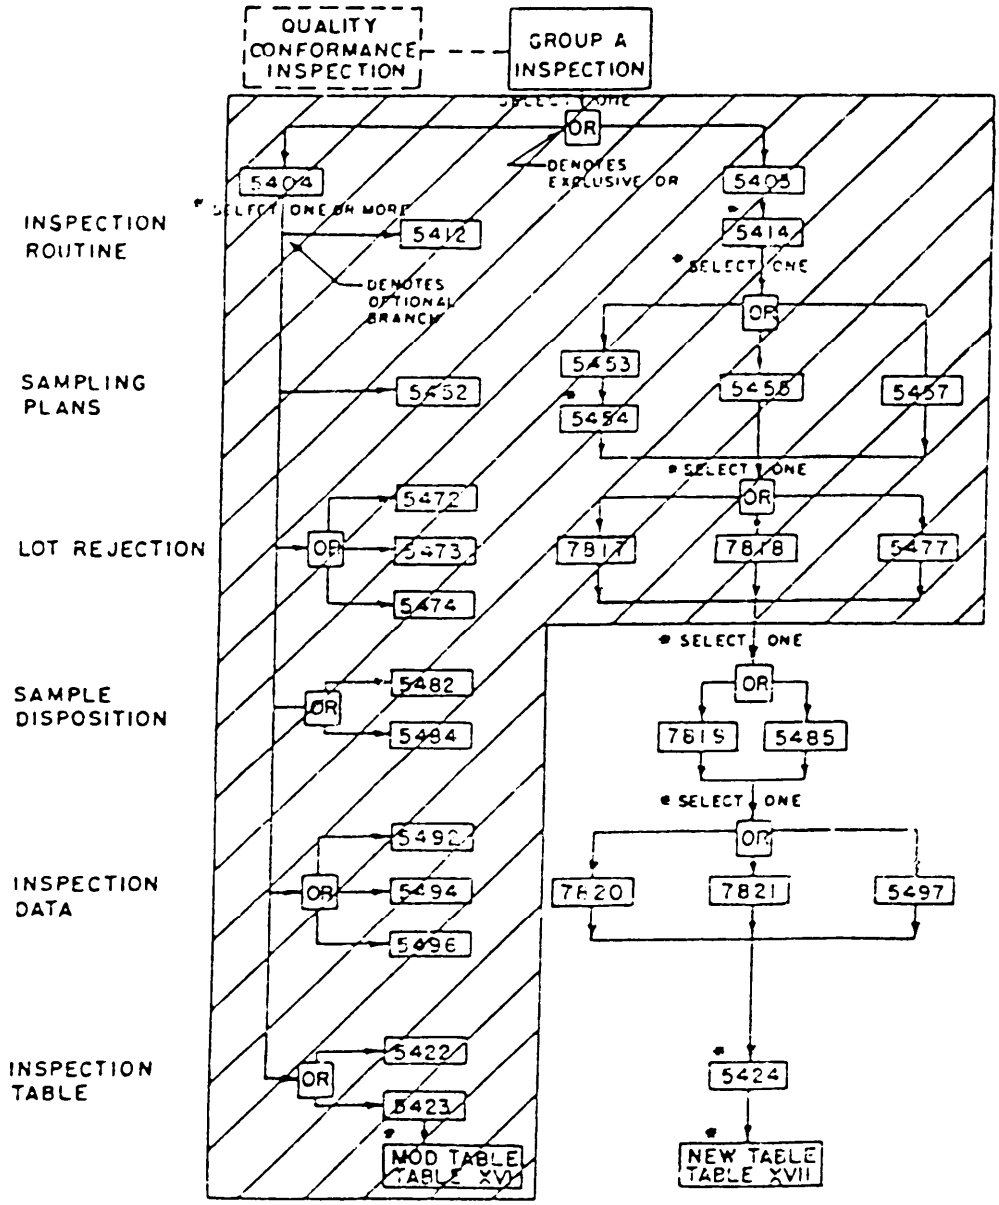

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.


CHAR CODE	STANDARD PARAGRAPH
7819	DISPOSITION OF SAMPLE UNITS. SAMPLE UNITS THAT HAVE BEEN SUBJECTED TO THE GROUP A INSPECTION SHALL NOT BE DELIVERED ON THE CONTRACT OR ORDER.
5485	DISPOSITION OF SAMPLE UNITS. SAMPLE UNITS THAT HAVE BEEN SUBJECTED TO THE GROUP A Inspection 5485.
7820	INSPECTION DATA. GROUP A INSPECTION DATA SHALL BE RECORDED AND ONE COPY SHALL ACCOMPANY THE SHIPMENT TO THE PROCURING ACTIVITY.
7821	INSPECTION DATA. GROUP A Inspection DATA SHALL BE RECORDED AND MADE AVAILABLE TO THE PROCURING ACTIVITY FOR 7821 MONTHS AFTER DELIVERY.
5497	INSPECTION DATA. GROUP A INSPECTION DATA SHALL BE 5497.
5424	GROUP A INSPECTION TABLE. THE GROUP A INSPECTION TABLE SHALL BE AS FOLLOWS:

(REFER TO TABLE XVII)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORK CODE INDEX (KCI)

30.8

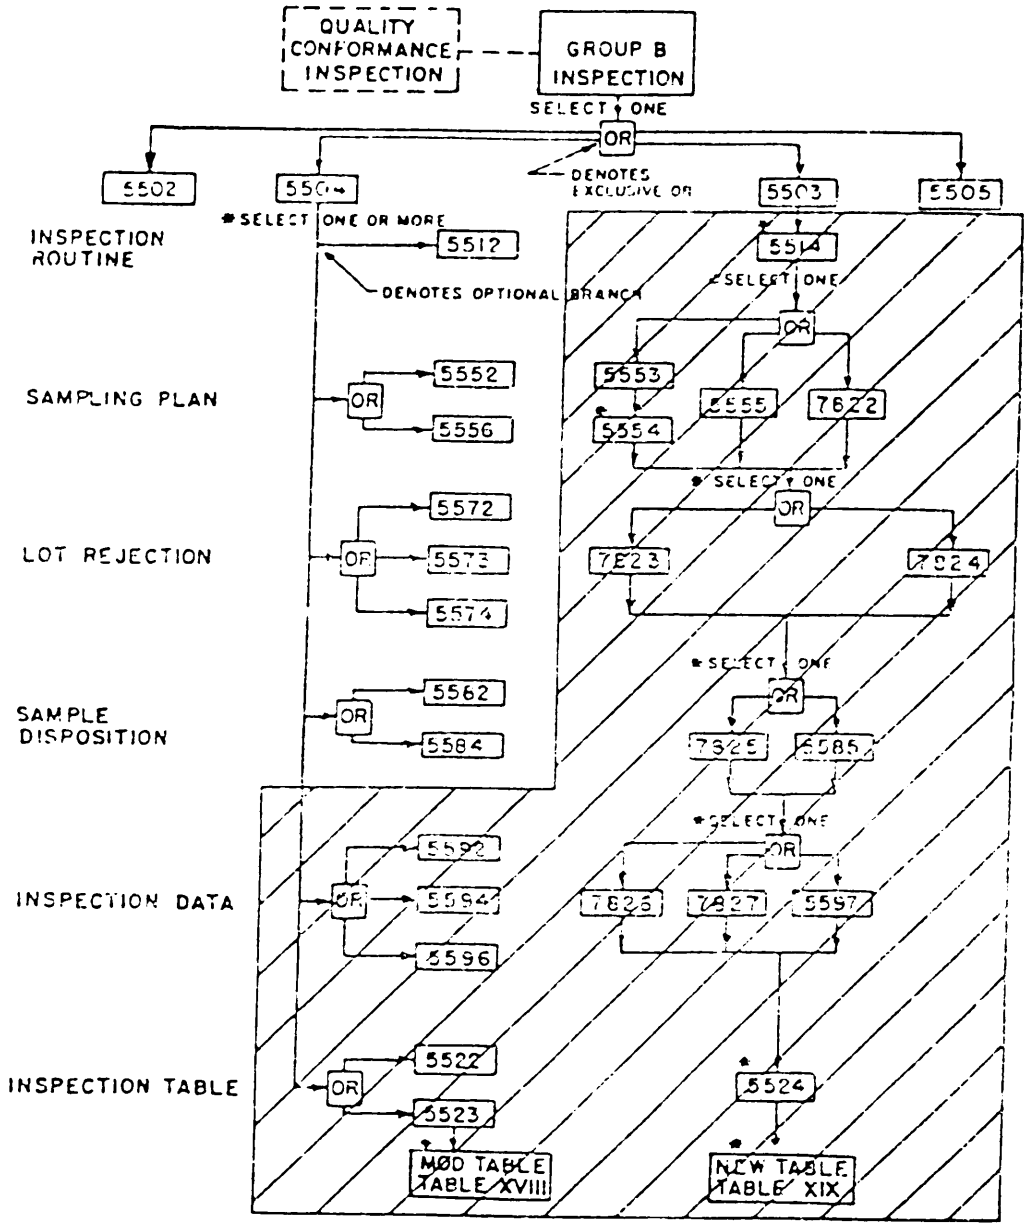


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
5502	GROUP B INSPECTION. GROUP B INSPECTION SHALL BE PERFORMED AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5502.
5504	GROUP B INSPECTION. GROUP B Inspection SHALL BE PERFORMED AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT AS SPECIFIED HEREIN.
5503	GROUP B INSPECTION. GROUP B SHALL BE PERFORMED AS SPECIFIED HEREIN.
5505	GROUP B INSPECTION. GROUP B INSPECTION IS NOT REQUIRED FOR ITEMS FURNISHED UNDER THIS DOCUMENT.
5512	GROUP B INSPECTION ROUTINE. GROUP B INSPECTION ROUTINE SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5512.
5552	GROUP B SAMPLING PLAN. THE GROUP B INSPECTION SAMPLING PLAN SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5552.
5556	GROUP B SAMPLING PLAN. THE GROUP B Inspection SAMPLING PLAN SHALL BE 5556.
5572	LOT REJECTION. LOT REJECTION SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5572.
5573	LOT REJECTION. THE INSPECTION LOT SHALL BE REJECTED IF THE NUMBER OF DEFECTIVE UNITS IS GREATER THAN THE NUMBER ALLOWED.
5574	LOT REJECTION. THE INSPECTION LOT SHALL BE REJECTED IF 5574.
5582	DISPOSITION OF SAMPLE UNITS. THE DISPOSITION OF SAMPLE UNITS THAT HAVE BEEN SUBJECTED TO THE GROUP B Inspection SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5582.
5584	DISPOSITION OF SAMPLE UNITS. SAMPLE UNITS THAT HAVE BEEN SUBJECTED TO THE GROUP B INSPECTION SHALL NOT BE DELIVERED ON THE CONTRACT OR ORDER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

30.8
(CONT)

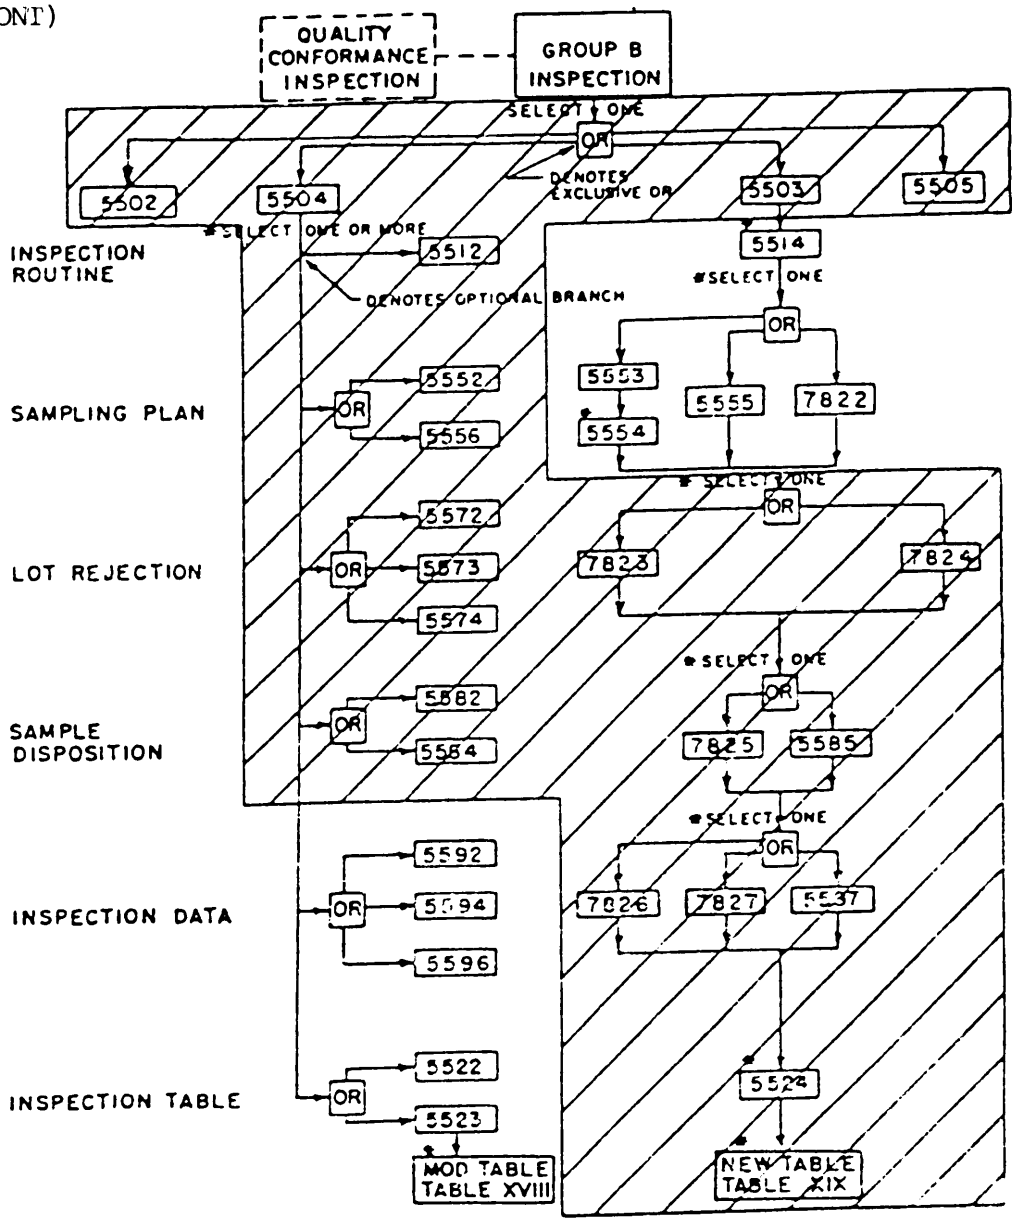

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.


APPENDIX A

CHAR CODE	STANDARD PARAGRAPH
5592	INSPECTION DATA. GROUP B INSPECTION DATA SHALL BE RECORDED AND MADE AVAILABLE TO THE PROCURING ACTIVITY AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5592.
5594	INSPECTION DATA. GROUP B INSPECTION DATA SHALL BE RECORDED AND ONE COPY SHALL BE SENT TO THE PROCURING ACTIVITY.
5596	INSPECTION DATA. GROUP B INSPECTION DATA SHALL BE RECORDED AND MADE AVAILABLE TO THE PROCURING ACTIVITY FOR 5596 MONTH(S) AFTER DELIVERY.
5522	GROUP B INSPECTION TABLE. THE GROUP B INSPECTION TABLE SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5522.
5523	GROUP B INSPECTION TABLE. THE GROUP B INSPECTION TABLE SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, SUBJECT TO THE FOLLOWING MODIFICATIONS: (REFER TO TABLE XVIII)
5514	GROUP B INSPECTION ROUTINE. SAMPLE UNITS SHALL BE SUBJECTED TO THE INSPECTION SPECIFIED IN THE GROUP B INSPECTION TABLE, IN THE ORDER SHOWN.
5553 5554	GROUP A SAMPLING PLAN. STATISTICAL SAMPLING AND INSPECTION SHALL BE IN ACCORDANCE WITH MIL-STD-105, FOR NORMAL INSPECTION, SINGLE SAMPLING. THE INSPECTION LEVEL SHALL BE 5553 AND Acceptable QUALITY LEVEL (AQL) SHALL BE 5554.
5555	GROUP B SAMPLING PLAN. STATISTICAL SAMPLING AND INSPECTION SHALL BE IN ACCORDANCE WITH MIL-STD-105, FOR NORMAL INSPECTION, SINGLE SAMPLING. THE INSPECTION LEVEL AND THE Acceptable QUALITY LEVEL (AQL) FOR EACH SUBGROUP SHALL BE AS SPECIFIED IN THE GROUP B Inspection TABLE.
7822	GROUP B SAMPLING PLAN. THE GROUP B Inspection SAMPLING PLAN SHALL 7822.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

30.8
(CONT)

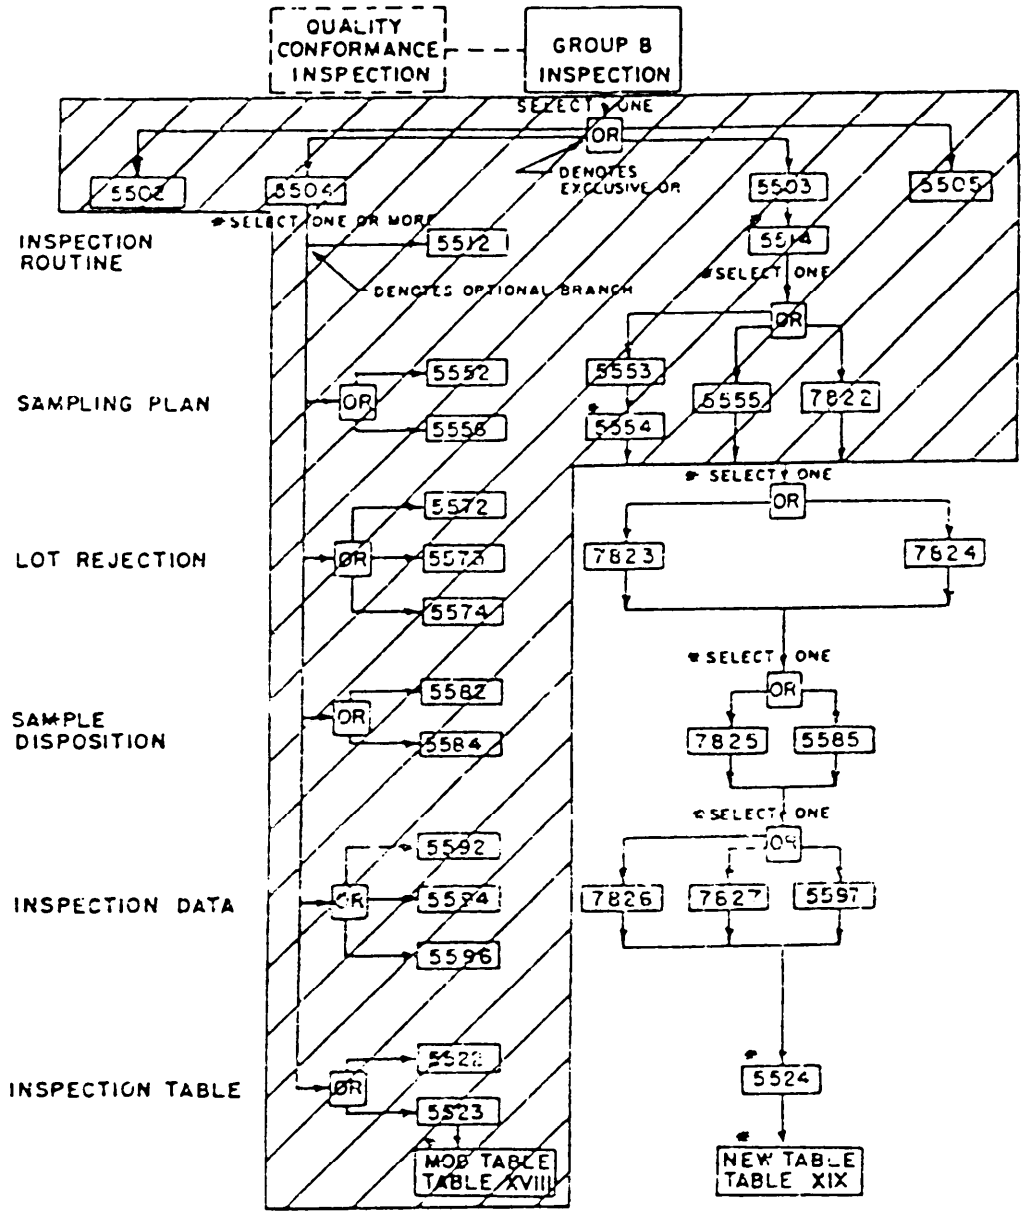

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

7823 LOT REJECTION. THE INSPECTION LOT SHALL BE REJECTED IF THE NUMBER OF DEFCTIVE UNITS IS GREATER THAN THE NUMBER ALLOWED.

7824 LOT REJECTION. THE INSPECTION LOT SHALL BE REJECTED IF 7824.

7825 DISPOSITION OF SAMPLE UNITS. SAMPLE UNITS THAT HAVE BEEN SUBJECTED TO THE GROUP B INSPECTION SHALL NOT BE DELIVERED ON THE CONTRACT OR ORDER.

5585 DISPOSITION OF SAMPLE UNITS. SAMPLE UNITS THAT HAVE BEEN SUBJECTED TO THE GROUP B INSPECTION 5585.

7826 INSPECTION DATA. GROUP B INSPECTION DATA SHALL BE RECORDED AND ONE COPY SHALL BE SENT TO THE PROCURING ACTIVITY.

7827 INSPECTION DATA. GROUP B INSPECTION SHALL BE RECORDED AND MADE AVAILABLE TO THE PROCURING ACTIVITY FOR 7827 MONTH(S) AFTER DELIVERY.

5597 INSPECTION DATA. GROUP B INSPECTION DATA SHALL 5597.


5524 GROUP B INSPECTION TABLE. THE GROUP B INSPECTION TABLE SHALL BE AS FOLLOWS:

(REFER TO TABLE XIX)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

30.9

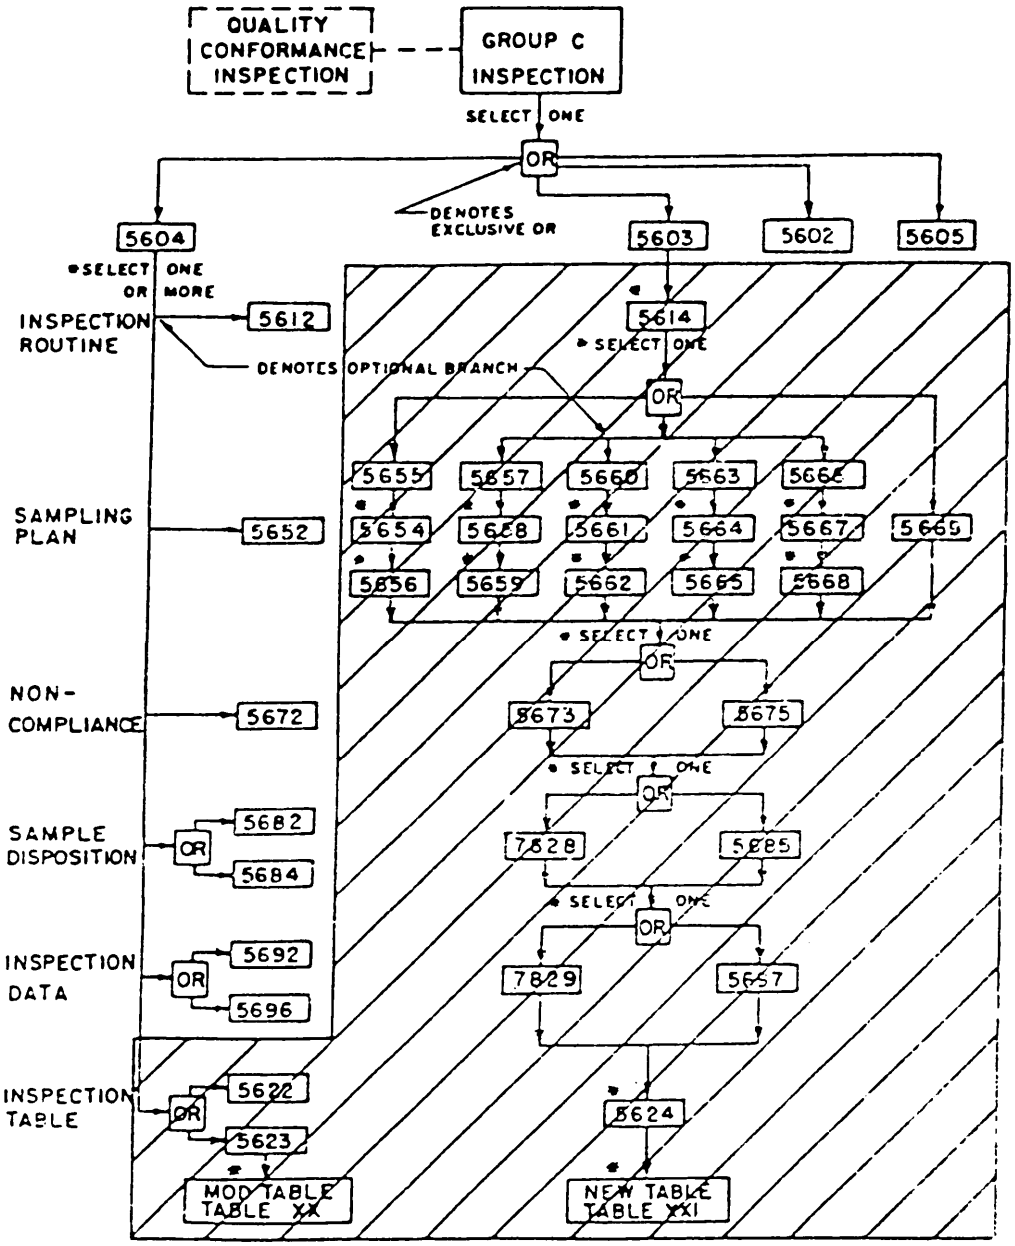

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.


APPENDIX A

CHAR CODE	STANDARD PARAGRAPH
5604	GROUP C INSPECTION. GROUP C INSPECTION SHALL BE PERFORMED AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT AS SPECIFIED HEREIN.
5603	GROUP C INSPECTION. GROUP C INSPECTION SHALL BE PERFORMED AS SPECIFIED HEREIN.
5602	GROUP C INSPECTION. GROUP C INSPECTION SHALL BE PERFORMED AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5602.
5605	GROUP C INSPECTION. GROUP C INSPECTION IS NOT REQUIRED FOR ITEMS FURNISHED UNDER THIS DOCUMENT.
5612	GROUP C INSPECTION ROUTINE. GROUP C INSPECTION ROUTINE SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5612.
5652	GROUP C SAMPLING PLAN. THE GROUP C INSPECTION ROUTINE SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5652.
5672	NONCOMPLIANCE. IF A SAMPLE FAILS TO PASS THE GROUP C INSPECTION THE SUPPLIER SHALL TAKE CORRECTIVE ACTION AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5672.
5682	DISPOSITION OF SAMPLE UNITS. THE DISPOSITION OF SAMPLE UNITS THAT HAVE BEEN SUBJECTED TO THE GROUP C INSPECTION SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5682.
5684	DISPOSITION OF SAMPLE UNITS. SAMPLE UNITS THAT HAVE BEEN SUBJECTED TO THE GROUP C INSPECTION SHALL NOT BE DELIVERED ON THE CONTRACT OR ORDER.
5692	INSPECTION DATA. GROUP C INSPECTION DATA SHALL BE RECORDED AND MADE AVAILABLE TO THE PROCURING ACTIVITY AS SPECIFIED IN 'THE BASE DOCUMENT, EXCEPT 5692.
5696	INSPECTION DATA. GROUP C INSPECTION DATA SHALL BE RECORDED AND MADE AVAILABLE TO THE PROCURING ACTIVITY FOR 5696 MONTHS AFTER INSPECTION.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

30.9
(CONT)

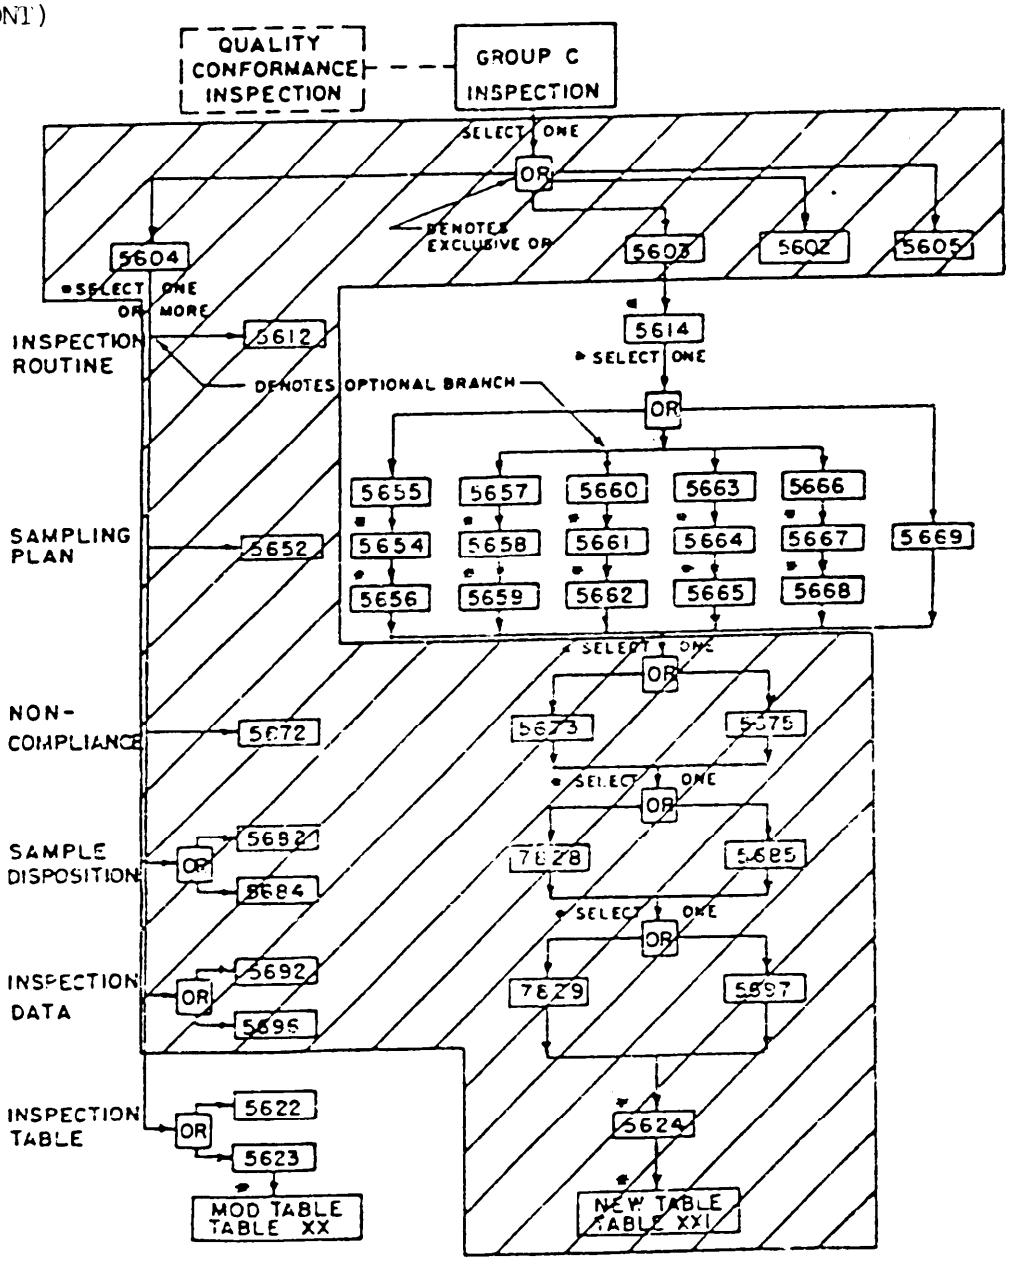

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

5622 GROUP C INSPECTION TABLE. THE GROUP C Inspection TABLE SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5622.

5623 GROUP C ISPECTION TABLE. THE GROUP C INSPECTION TABLE SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, SUBJECT TO THE FOLLOWING MODIFICATIONS:

(REFER TO TABLE XX)

5614 GROUP C INSPECTION ROUTINE. SAMPLE UNITS SHALL BE SUBJECTED TO THE INSPECTION SPECIFIED IN THE GROUP C INSPECTION TABLE, IN THE ORDER SHOWN.

5655 GROUP C SAMPLING PLAN. DURING EACH PRODUCTION PERIOD OF
5654 5655, 5654 SAMPLE UNITS SHALL BE SELECTED AT RANDOM AND SHALL
5656 BE SUBJECTED TO THE GROUP C INSPECTION AT THE END OF THE PERIOD. THERE SHALL BE 5656 DEFECTS ALLOWED.

GROUP C SAMPLING PLAN. SAMPLE UNITS FOR THE GROUP C SHALL BE SELECTED PERIODICALLY AND INSPECTED AT THE END OF THE SPECIFIED PRODUCTION PERIOD. THE LENGTH OF EACH PRODUCTION PERIOD, NUMBER OF SAMPLE UNITS AND ALLOWABLE DEFECTS SHALL BE AS FOLLOWS:

5657 SUBGROUP ONE. 5657 SAMPLE UNITS SHALL BE SELECTED FROM EACH
5658 PRODUCTION PERIOD OF 5658. THERE SHALL BE 5659 DEFECTS
5659 ALLOWED.

5660 SUBGROUP TWO. 5660 SAMPLE UNITS SHALL BE SELECTED FROM EACH
5661 PRODUCTION PERIOD OF 5661. THERE SHALL BE 5662 DEFECTS
5662 ALLOWED.

5663 SUBGROUP THREE. 5663 SAMPLE UNITS SHALL BE SELECTED FROM
5664 EACH PRODUCTION PERIOD OF 5664. THERE SHALL BE 5665 DEFECTS
5665 ALLOWED.


5666 SUBGROUP FOUR. 5666 SAMPLE UNITS SHALL BE SELECTED FROM EACH
5667 PRODUCTION PERIOD OF 5667. THERE SHALL BE 5668 DEFECTS
5668 ALLOWED.

5669 GROUP C SAMPLING PLAN. THE GROUP C INSPECTION SAMPLING PLAN SHALL 5669.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

30.9
(CONT)

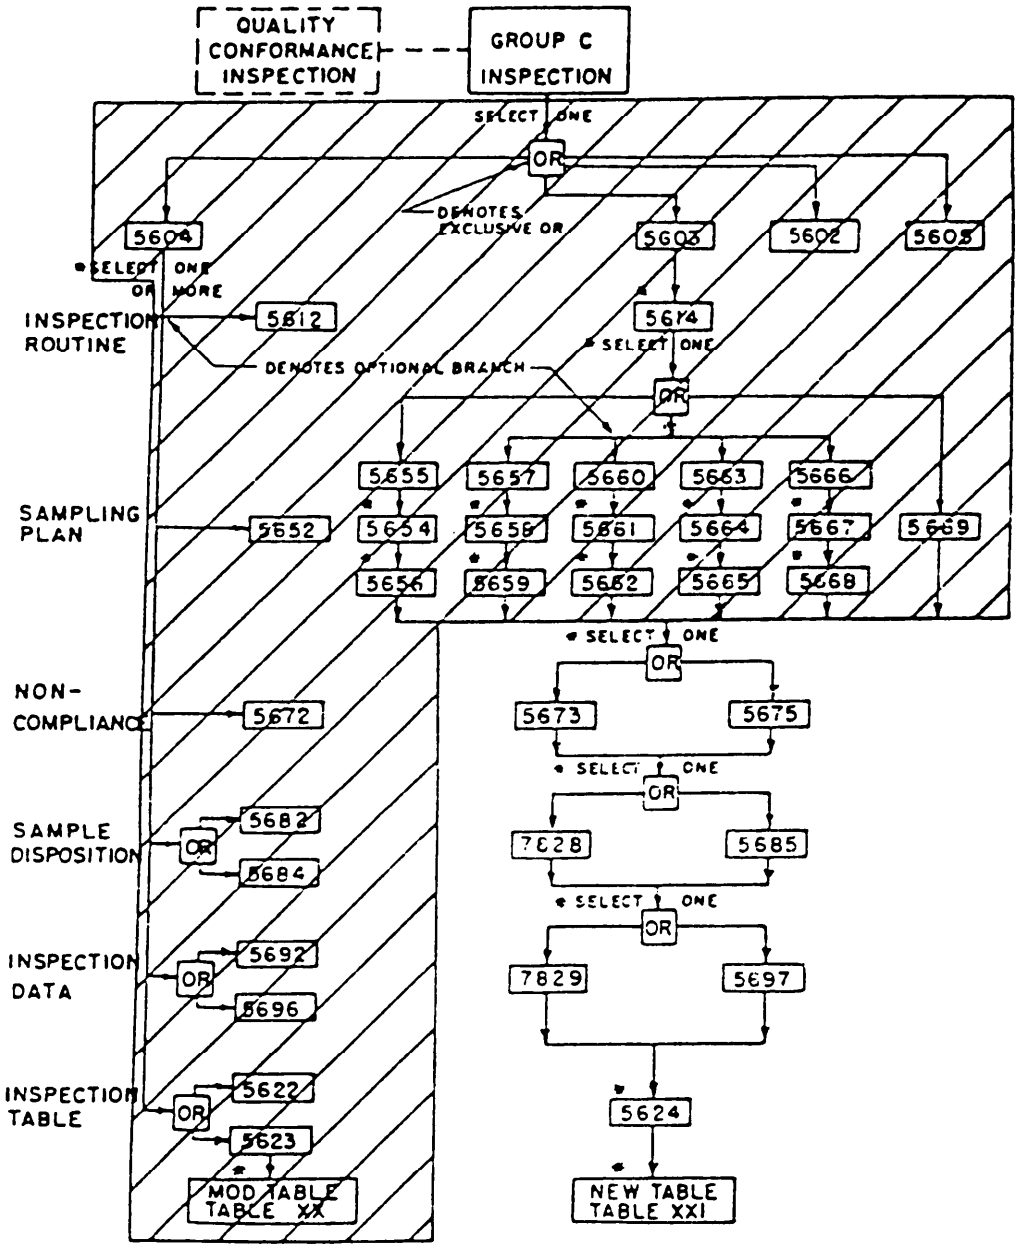

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.


CHAR CODE	STANDARD PARAGRAPH
5673	NONCOMPLIANCE. IF A SAMPLE FAILS TO PASS THE GROUP C Inspection, THE SUPPLIER SHALL TAKE CORRECTIVE ACTION ON THE MATERIALS OR PROCESSES, OR BOTH, AS WARRANTED. ALL UNITS OF PRODUCT WHICH CAN BE CORRECTED AND WHICH WERE MANUFACTURED UNDER ESSENTIALLY THE SAME CONDITIONS WITH ESSENTIALLY THE SAME MATERIALS , PROCESSES , ETC. , AND WHICH ARE CONSIDERED SUBJECT TO THE SAME FAILURE SHALL BE ALSO CORRECTED. Acceptance OF THE PRODUCT SHALL BE DISCONTINUED UNTIL CORRECTIVE ACTION, ACCEPTABLE TO THE GOVERNMENT, HAS BEEN TAKEN. AFTER THE CORRECTIVE ACTION HAS BEEN TAKEN, GROUP C INSPECTION SHALL BE REPEATED ON ADDITIONAL SAMPLE UNITS (ALL INSPECTIONS, OR THE INSPECTION WHICH THE ORIGINAL SAMPLE FAILED, AT THE OPTION OF THE GOVERNMENT). GROUPS A AND B INSPECTION MAY BE REINSTITUTED; HOWEVER, FINAL ACCEPTANCE SHALL BE WITHHELD UNTIL THE GROUP C REINSPECTION HAS SHOWN THAT THE CORRECTIVE ACTION WAS SUCCESSFUL. IN THE EVENT OF FAILURE AFTER REINSPECTION, INFORMATION CONCERNING THE FAILURE AND CORRECTIVE ACTION TAKEN SHALL BE FURNISHED TO THE COGNIZANT INSPECTION ACTIVITY AND THE QUALIFYING ACTIVITY.
5675	NONCOMPLIANCE . IF A SAMPLE FAILS TO PASS THE GROUP C INSPECTION THE SUPPLIER SHALL 5675.
7828	DISPOSITION OF SAMPLE UNITS. SAMPLE UNITS THAT HAVE BEEN SUBJECTED TO THE GROUP C INSPECTION SHALL NOT BE DELIVERED ON THE CONTRACT OR ORDER.
5685	DISPOSITION OF SAMPLE UNITS. SAMPLE UNITS THAT HAVE BEEN SUBJECTED TO THE GROUP C INSPECTION 5685.
7829	INSPECTION DATA. GROUP C INSPECTION DATA SHALL BE RECORDED AND MADE AVAILABLE TO THE PROCURING ACTIVITY FOR 7829 MONTHS AFTER THE INSPECTION.
5697	INSPECTION DATA. GROUP C INSPECTION DATA SHALL 5697.
5624	GROUP C INSPECTION TABLE. THE GROUP C INSPECTION TABLE SHALL BE AS FOLLOWS:

(REFER TO TABLE XXI)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

30.10

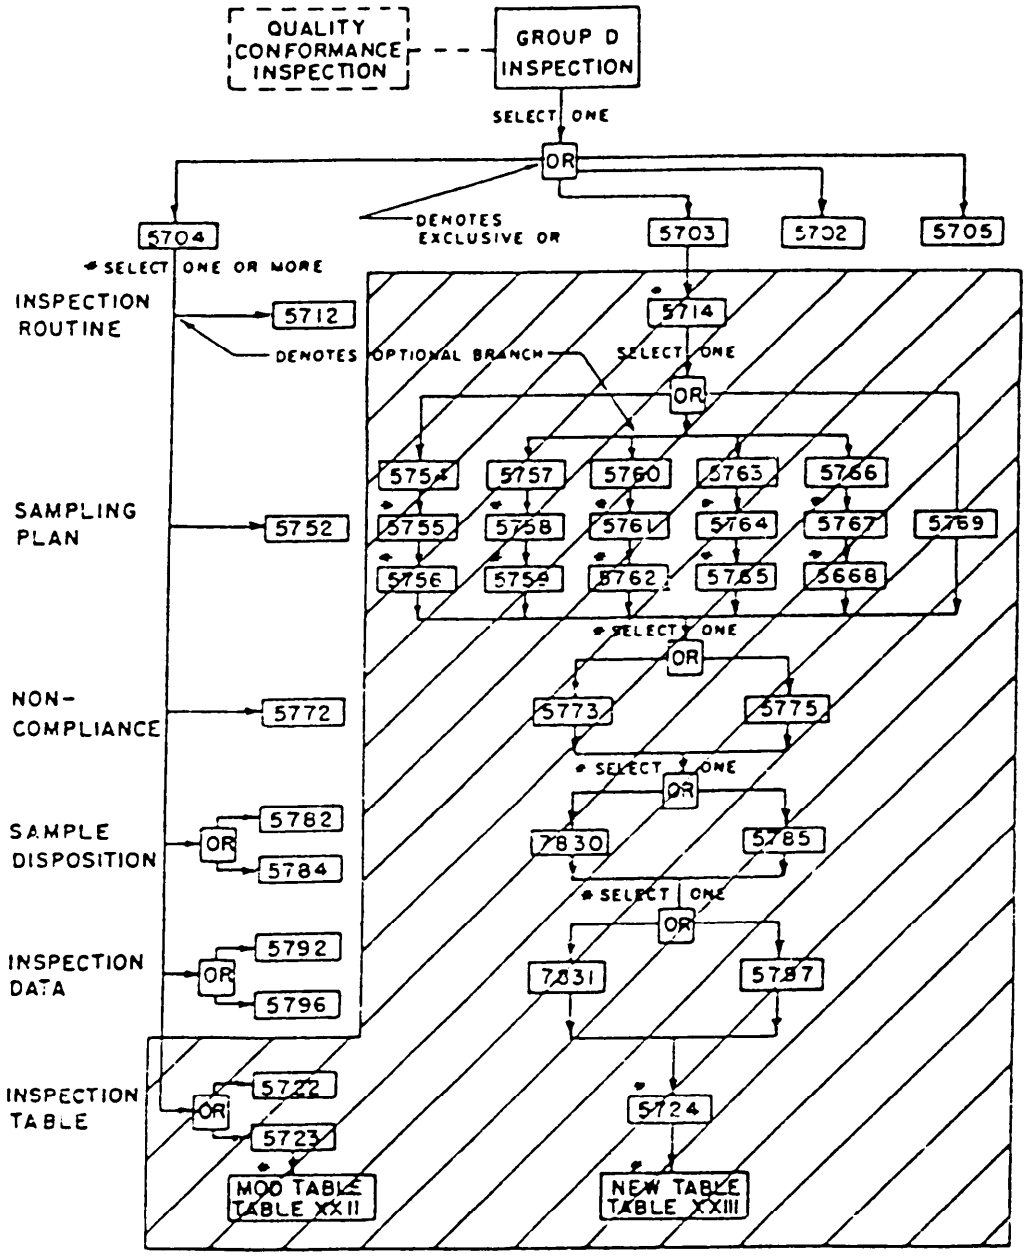

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.


APPENDIX A

CHAR CODE	STANDARD PARAGRAPH
5704	GROUP D INSPECTION. GROUP D INSPECTION SHALL BE PERFORMED AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT AS SPECIFIED HEREIN.
5703	GROUP D INSPECTION. GROUP D INSPECTION SHALL BE PERFORMED AS SPECIFIED HEREIN.
5702	GROUP D INSPECTION. GROUP D INSPECTION SHALL BE PERFORMED AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5702.
5705	GROUP D INSPECTION. GROUP D INSPECTION IS NOT REQUIRED FOR ITEMS FURNISHED UNDER THIS DOCUMENT.
5712	GROUP D INSPECTION ROUTINE. GROUP D INSPECTION ROUTINE SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5712.
5752	GROUP D SAMPLING PLAN. THE GROUP D INSPECTION SAMPLING PLAN SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5752.
5772	NONCOMPLIANCE. IF A SAMPLE FAILS TO PASS THE GROUP D INSPECTION THE SUPPLIER SHALL TAKE Corrective ACTION AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5772.
5782	DISPOSITION OF SAMPLE UNITS. THE DISPOSITION OF SAMPLE UNITS THAT HAVE BEEN SUBJECTED TO THE GROUP D INSPECTION SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5782.
5784	DISPOSITION OF SAMPLE UNITS. SAMPLE UNITS THAT HAVE BEEN SUBJECTED TO THE GROUP D INSPECTION SHALL NOT BE DELIVERED ON THE CONTRACT OR ORDER.
5792	INSPECTION DATA. GROUP D INSPECTION DATA SHALL BE RECORDED AND MADE AVAILABLE TO THE PROCURING ACTIVITY AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5792.
5796	INSPECTION DATA. GROUP D INSPECTION DATA SHALL BE RECORDED AND MADE AVAILABLE TO THE PROCURING ACTIVITY FOR 5796 MONTHS AFTER THE INSPECTION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

30.10
(CONT)

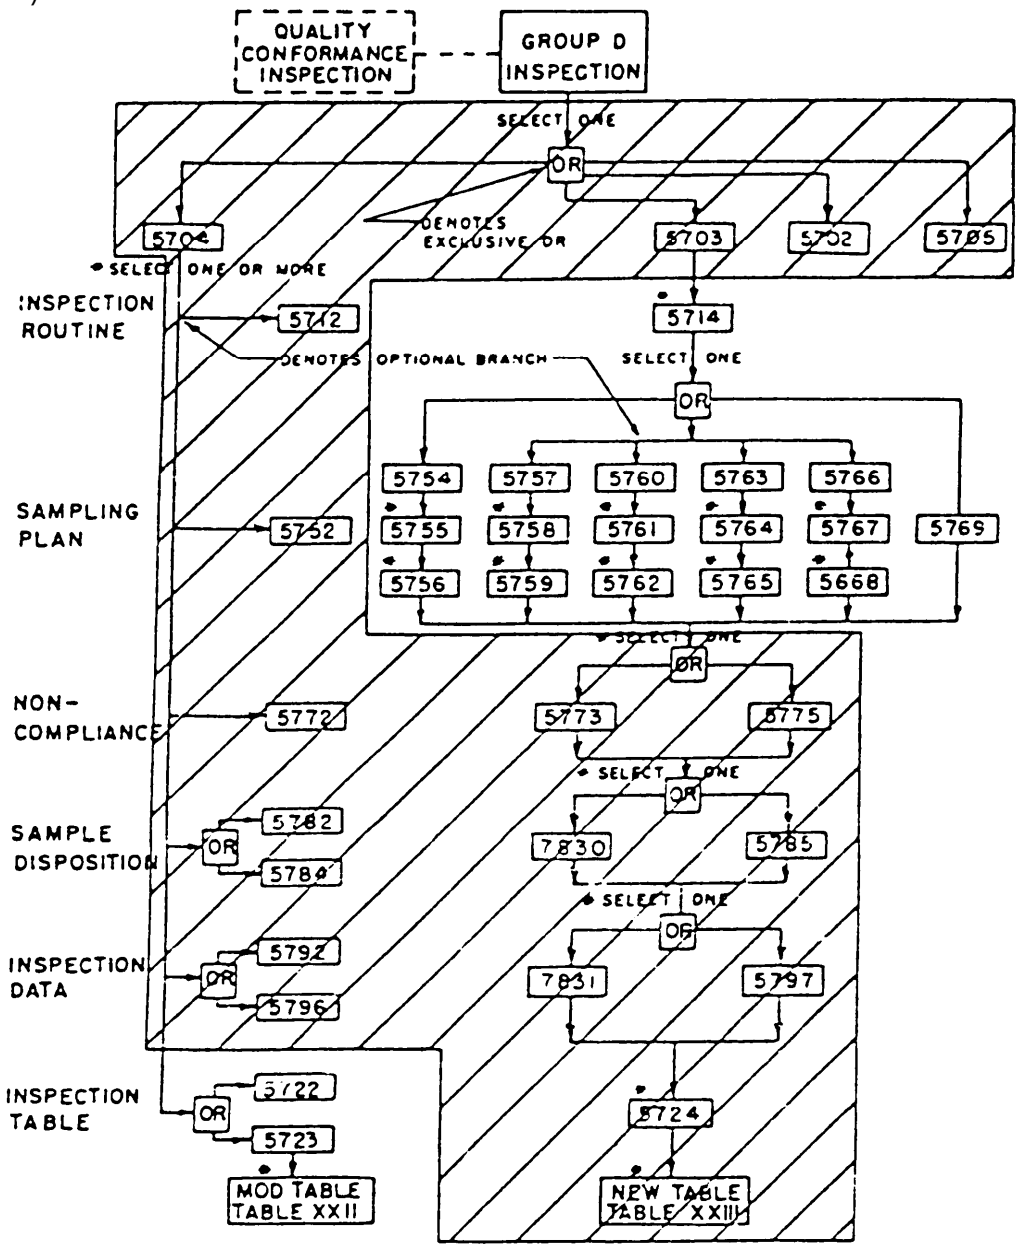


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
5722	GROUP D INSPECTION TABLE. THE GROUP D INSPECTION TABLE SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5722.
5723	GROUP D INSPECTION TABLE. THE GROUP D Inspection TABLE SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, SUBJECT TO THE FOLLOWING MODIFICATIONS: (REFER TO TABLE XXII)
5714	GROUP D INSPECTION ROUTINE. SAMPLE UNITS SHALL BE SUBJECTED TO THE INSPECTIONS SPECIFIED IN THE GROUP D INSPECTION TABLE, IN THE ORDER SHOWN.
5754 5755 5756	GROUP D SAMPLING PLAN. DURING EACH PRODUCTION PERIOD OF 5754, 5755 SAMPLE UNITS SHALL BE SELECTED AT RANDOM AND SHALL BE SUBJECTED TO THE GROUP D INSPECTION AT THE END OF THE PERIOD. THERE SHALL BE 5756 DEFECTS ALLOWED.
	GROUP D SAMPLING PLAN. SAMPLE UNITS FOR THE GROUP D INSPECTION SHALL BE SELECTED PERIODICALLY AND INSPECTED AT THE END OF THE SPECIFIED PRODUCTION PERIOD. THE LENGTH OF EACH PRODUCTION PERIOD, NUMBER OF SAMPLE UNITS AND ALLOWABLE DEFECTS SHALL BE AS FOLLOWS:
5757 5758 5759	SUBGROUP ONE. 5757 SAMPLE UNITS SHALL BE SELECTED FROM EACH PRODUCTION PERIOD OF 5758. THERE SHALL BE 5759 DEFECTS ALLOWED.
5760 5761 5762	SUBGROUP TWO. 5760 SAMPLE UNITS SHALL BE SELECTED FROM EACH PRODUCTION PERIOD OF 5761. THERE SHALL BE 5762 DEFECTS ALLOWED.
5763 5764 5765	SUBGROUP THREE. 5763 SAMPLE UNITS SHALL BE SELECTED FROM EACH PRODUCTION PERIOD OF 5764. THERE SHALL BE 5765 DEFECTS ALLOWED.
5766 5767 5768	SUBGROUP FOUR. 5766 SAMPLE UNITS SHALL BE SELECTED FROM EACH PRODUCTION PERIOD OF 5767. THERE SHALL BE 5768 DEFECTS ALLOWED.
5769	GROUP D SAMPLING PLAN. THE GROUP D INSPECTION SAMPLING PLAN SHALL 5769.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

30.10
(CONT)

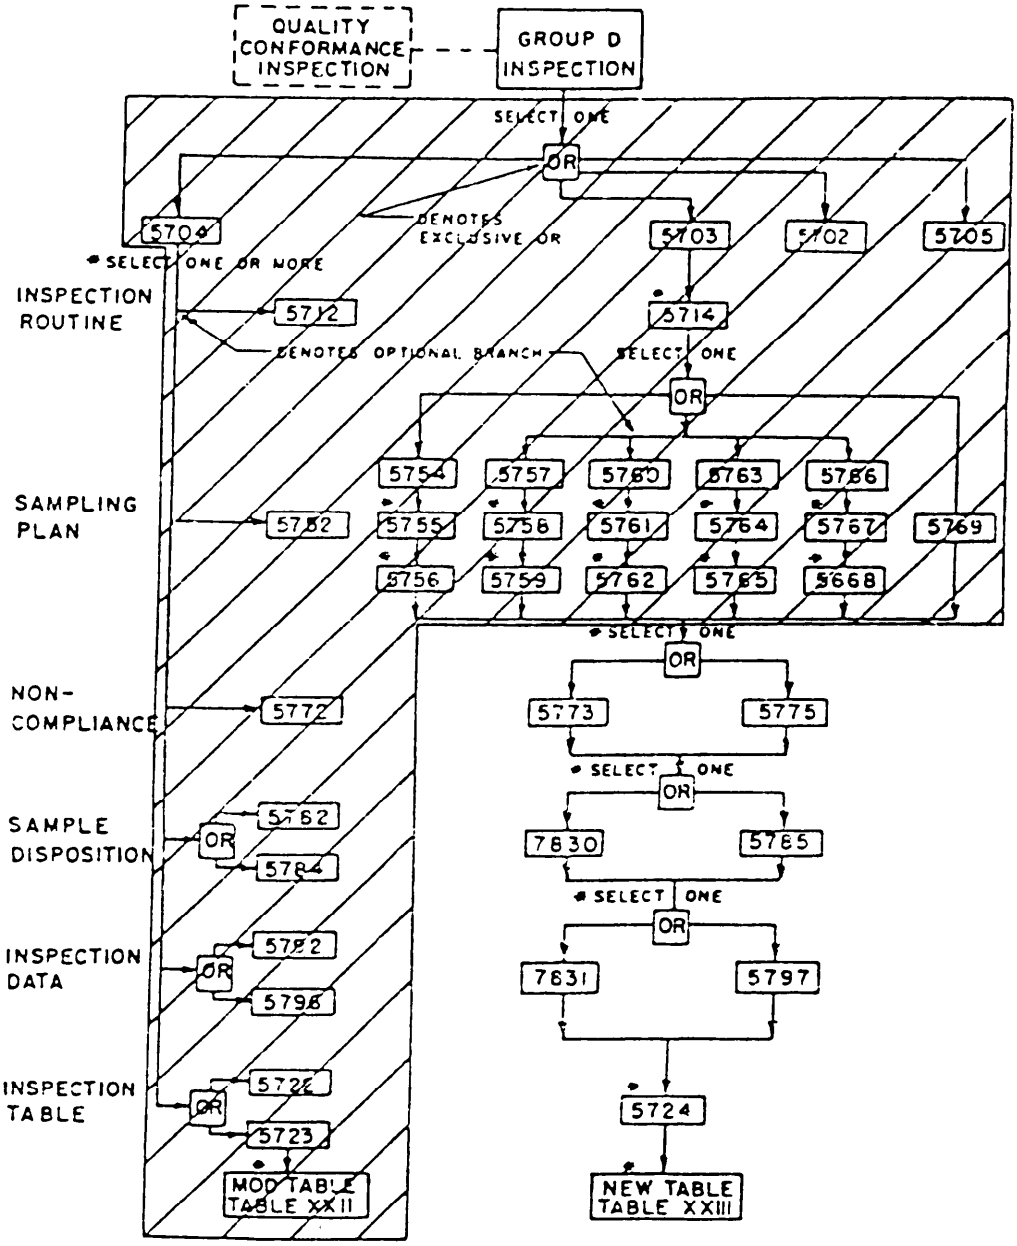

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.


CHAR CODE	STANDARD PARAGRAPH
5773	NONCOMPLIANCE. IF A SAMPLE FAILS TO PASS THE GROUP D INSPECTION, THE SUPPLIER SHALL TAKE CORRECTIVE ACTION ON THE MATERIALS OR PROCESSES, OR BOTH, AS WARRANTED. ALL UNITS OF PRODUCT WHICH CAN BE CORRECTED AND WHICH WERE MANUFACTURED UNDER ESSENTIALLY THE SAME CONDITIONS, WITH ESSENTIALLY THE SAME MATERIALS, PROCESSES, ETC., AND WHICH ARE CONSIDERED SUBJECT TO THE SAME FAILURE SHALL BE ALSO CORRECTED. ACCEPTANCE OF THE PRODUCT SHALL BE DISCONTINUED UNTIL CORRECTIVE ACTION, ACCEPTABLE TO THE GOVERNMENT, HAS BEEN TAKEN. AFTER THE CORRECTIVE ACTION HAS BEEN TAKEN, GROUP D Inspection SHALL BE REPEATED ON ADDITIONAL SAMPLE UNITS (ALL INSPECTIONS, OR THE INSPECTION WHICH THE ORIGINAL SAMPLE FAILED, AT THE OPTION OF THE GOVERNMENT). GROUPS A, B, AND C INSPECTION MAY BE REINSTITUTED; HOWEVER FINAL Acceptance SHALL BE WITHHELD UNTIL THE GROUP D INSPECTION HAS SHOWN THAT THE CORRECTIVE ACTION WAS SUCCESSFUL. IN THE EVENT OF FAILURE AFTER REINSPECTION, INFORMATION CONCERNING THE FAILURE AND CORRECTIVE ACTION SHALL BE FURNISHED TO THE COGNIZANT INSPECTION ACTIVITY AND THE QUALIFYING ACTIVITY.
5775	NONCOMPLIANCE. IF A SAMPLE FAILS TO PASS THE GROUP D INSPECTION THE SUPPLIER SHALL 5775.
7830	DISPOSITION OF SAMPLE UNITS. SAMPLE UNITS THAT HAVE BEEN SUBJECTED TO THE GROUP D Inspection SHALL NOT BE DELIVERED ON THE CONTRACT OR ORDER.
5785	DISPOSITION OF SAMPLE UNITS. SAMPLE UNITS THAT HAVE BEEN SUBJECTED TO THE GROUP D INSPECTION 5785.
7831	INSPECTION DATA. GROUP D INSPECTION DATA SHALL BE RECORDED AND MADE AVAILABLE TO THE PROCURING ACTIVITY FOR 7831 MONTHS AFTER THE INSPECTION.
5797	INSPECTION DATA. GROUP D INSPECTION DATA SHALL 5797.
5724	GROUP D INSPECTION TABLE. THE GROUP D INSPECTION TABLE SHALL BE AS FOLLOWS:

(REFER TO TABLE XXIII)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

30.11

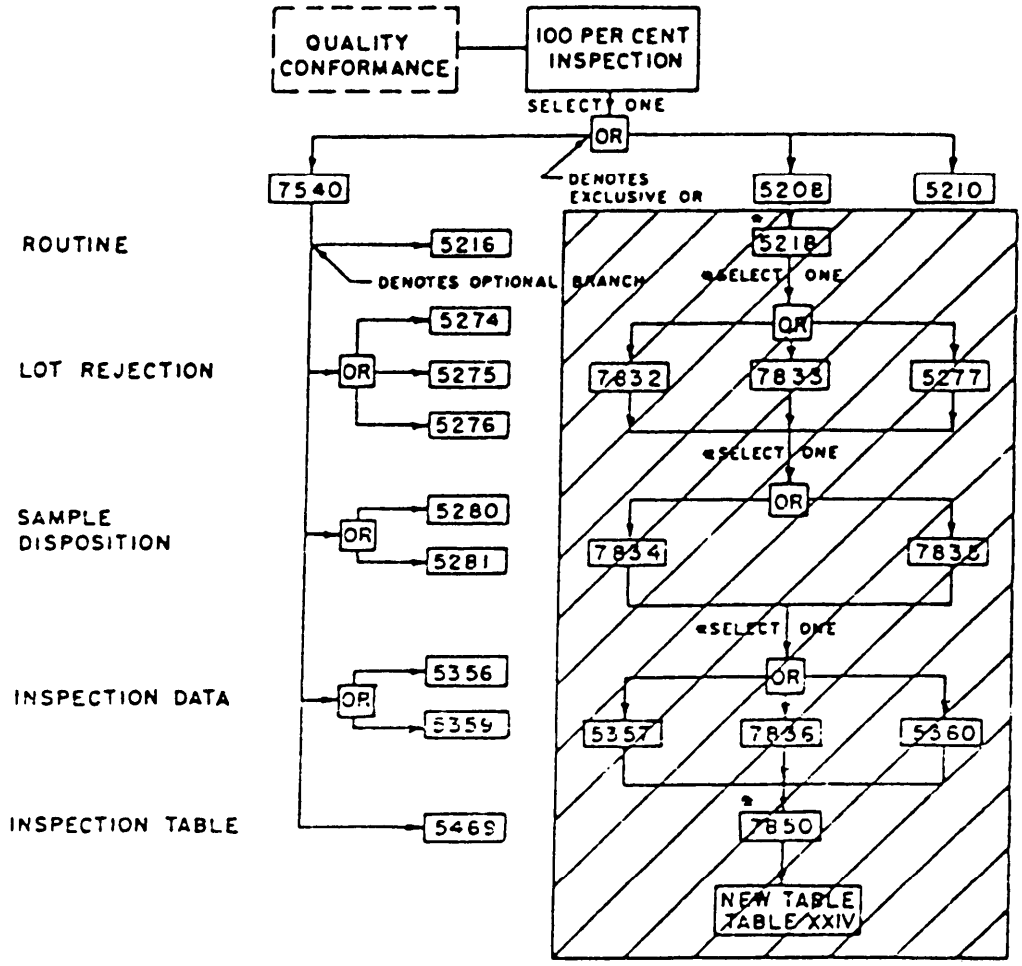

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.


APPENDIX A

CHAR CODE	STANDARD PARAGRAPH
7540	100 PERCENT INSPECTION. 100 PERCENT INSPECTION SHALL BE PERFORMED AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT AS SPECIFIED HEREIN.
5208	100 PERCENT INSPECTION. 100 PERCENT INSPECTION SHALL BE PERFORMED AS SPECIFIED HEREIN.
5210	100 PERCENT INSPECTION. 100 PERCENT INSPECTION IS NOT REQUIRED BY THIS DOCUMENT.
5216	100 PERCENT INSPECTION ROUTINE. 100 PERCENT Inspection ROUTINE SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5216.
5274	LOT REJECTION. LOT REJECTION SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5274.
5275	LOT REJECTION. THE INSPECTION LOT SHALL BE REJECTED IF THE NUMBER OF DEFECTIVE UNITS IS GREATER THAN THE NUMBER ALLOWED.
5276	LOT REJECTION. THE INSPECTION LOT SHALL BE REJECTED IF MORE THAN 5276 PERCENT OF THE UNITS INSPECTED ARE DEFECTIVE.
5280	DISPOSITION OF SAMPLE UNITS. 100 PERCENT INSPECTION IS THE ONLY INSPECTION REQUIRED. ACCEPTABLE UNITS FROM ACCEPTED LOTS SHALL BE DELIVERABLE ON CONTRACT OR PURCHASE ORDER.
5281	DISPOSITION OF SAMPLE UNITS. AFTER COMPLETION OF 100 PERCENT INSPECTION, ACCEPTABLE UNITS FROM ACCEPTED LOTS SHALL BE SUBMITTED TO QUALITY CONFORMANCE INSPECTION.
5356	INSPECTION DATA. 100 PERCENT INSPECTION DATA SHALL BE RECORDED AND MADE AVAILABLE TO THE PROCURING ACTIVITY AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5356.
5359	INSPECTION DATA. 100 PERCENT Inspection DATA SHALL BE RECORDED AND MADE AVAILABLE TO THE PROCURING ACTIVITY FOR 5359 MONTH(S) AFTER THE INSPECTION.
5469	100 PERCENT INSPECTION TABLE. THE 100 PERCENT INSPECTION TABLE SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5469.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

30.11
(CONT)

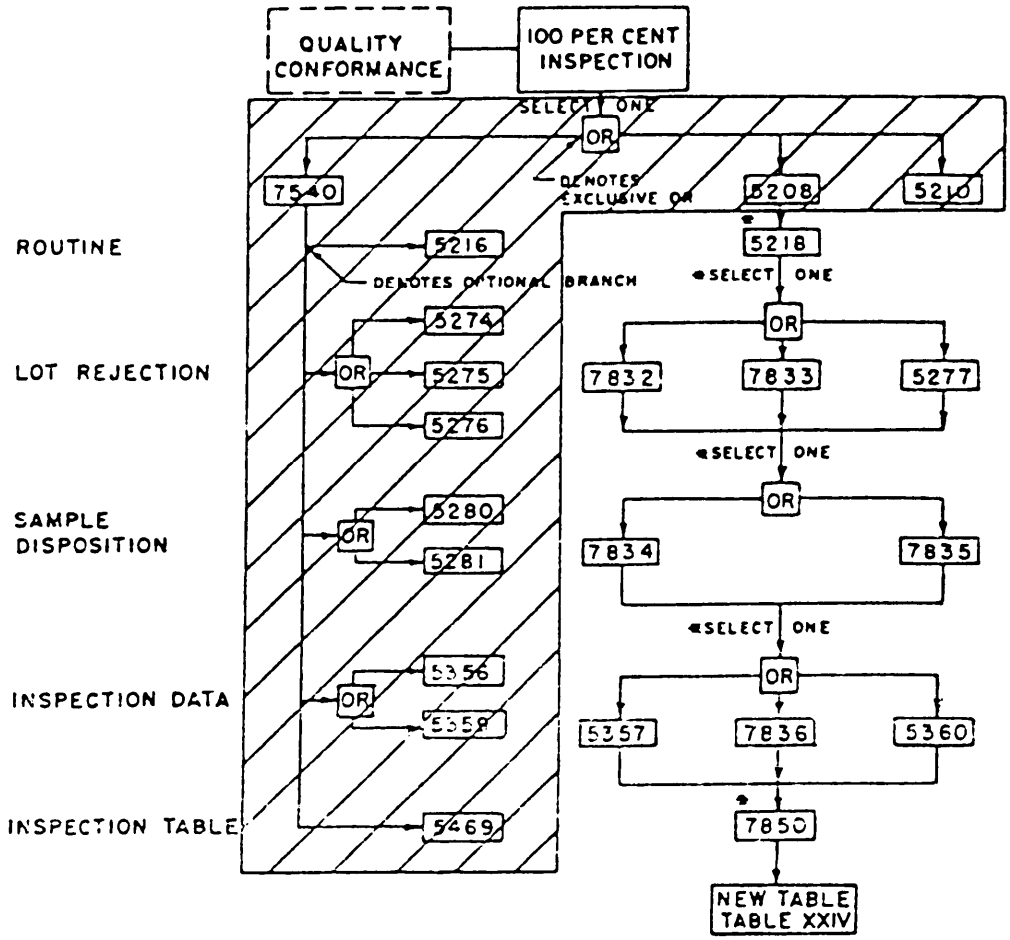

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
5218	100 PERCENT INSPECTION ROUTINE. UNITS SHALL BE SUBJECTED TO THE TESTS SPECIFIED IN THE 100 PERCENT INSPECTION TABLE, IN THE ORDER SHOWN.
7832	LOT REJECTION. THE INSPECTION LOT SHALL BE REJECTED IF THE NUMBER OF DEFECTIVE UNITS IS GREATER THAN THE NUMBER ALLOWED.
7833	LOT REJECTION. THE INSPECTION LOT SHALL BE REJECTED IF MORE THAN 7833 PERCENT OF THE UNITS INSPECTED ARE DEFECTIVE.
5277	LOT REJECTION. THE INSPECTION LOT SHALL BE REJECTED IF 5277.
7834	DISPOSITION OF SAMPLE UNITS. 100 PERCENT INSPECTION IS THE ONLY INSPECTION REQUIRED, ACCEPTABLE UNITS FROM ACCEPTED LOTS SHALL BE DELIVERABLE ON CONTRACT OR PURCHASE ORDER. DISPOSITION OF SAMPLE UNITS. AFTER COMPLETION OF 100 PERCENT INSPECTION, ACCEPTABLE UNITS FROM ACCEPTED LOTS SHALL BE SUBMTTED TO QUALITY CONFORMANCE INSPECTION.
5357	INSPECTION DATA. 100 PERCENT INSPECTION DATA SHALL BE RECORDED AND ONE COPY SHALL BE SENT TO THE PROCURING ACTIVITY.
7836	INSPECTION DATA. 100 PERCENT INSPECTION DATA SHALL BE RECORDED AND MADE AVAILABLE TO THE PROCURING ACTIVITY FOR 7836 MONTH(S) AFTER DELIVERY.
5360	INSPECTION DATA. 100 PERCENT INSPECTION DATA SHALL 5360.
7850	100 PERCENT INSPECTION TABLE. THE 100 PERCENT INSPECTION SHALL BE AS SHOWN IN THE FOLLOWING TABLE: (REFER TO TABLE XXIV)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
30.12 PACKAGING INSPECTION (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT _____	5392
DETERMINE COMPLIANCE.	5393
30.13 PACKAGING INSPECTION SAMPLING PLAN (SELECT ONE)	
PER MIL-STD-105	
*(INSPECTION LEVEL)	5394
*(AQL)	5395
(DESIGNATE)	5396
30.14 ADDITIONAL QUALITY ASSURANCE PREVISIONS (SEE 5.18.3)	
A ____	7011
B ____	7012
C ____	7013
D ____	7014
E ____	7015

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
5392	PACKAGING INSPECTION. PACKAGING SHALL BE INSPECTED AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT 5392.
5393	PACKAGING INSPECTION. PACKAGING SHALL BE INSPECTED TO DETERMINE COMPLIANCE WITH THE REQUIREMENTS SPECIFIED.
5394 5395	PACKAGING INSPECTION SAMPLING PLAN. THE SAMPLE PLAN SHALL **BE IN** ACCORDANCE WITH MIL-STD-105, FOR NORMAL INSPECTION, SINGLE SAMPLING. THE INSPECTION LEVEL SHALL BE 5394 AND THE ACCEPTABLE QUALITY LEVEL (AQL) SHALL BE 5395.
5396	PACKAGING INSPECTION SAMPLING PLAN. THE SAMPLING PLAN SHALL 5396.

ADDITIONAL QUALITY ASSURANCE PROVISIONS.

7011	(A) 7011.
7012	(B) 7012.
7013	(c) 7013.
7014	(D) 7014.
7015	(E) 7015.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
30.15 METHOD OF INSPECTION	
TEST METHODS (SELECT ONE)	
AS SPECIFIED.	1560
APPROVED SUBSTITUTION PERMITTED.	1561
30.16 VISUAL AND MECHANICAL INSPECTION.	7640
30.17 PACKAGING	
NOTE: AUTOMATIC ONLY WITH CODE 1006 AND CODE 0700.	
30.18 PRESERVATION-PACKAGING	
PACKAGING (DOC DES)	7546
LEVEL A OR C	7545

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	METHOD OF INSPECTION.
1560	TEST METHODS. EXAMINATION AND TESTS SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT AS SPECIFIED HEREIN.
1561	TEST METHODS. EXAMINATION AND TEST SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT AS SPECIFIED HEREIN. OTHER TEST METHODS MAY BE SUBSTITUTED UPON WRITTEN APPROVAL BY THE PROCURING ACTIVITY, PROVIDED THE SUPPLIER HAS DEMONSTRATED THAT THE RESULTS OBTAINED PROPERLY CORRELATE WITH THOSE OBTAINED USING THE METHODS SPECIFIED. THE SUPPLIER MUST ALSO DEMONSTRATE THAT SUCH SUBSTITUTION DOES NOT RELAX THE REQUIREMENTS OF THIS DOCUMENT.
7640	VISUAL AND MECHANICAL INSPECTION. ITEMS SHALL BE VISUALLY INSPECTED AS REQUIRED BY THE BASE DOCUMENT (UNLESS OTHERWISE SPECIFIED HEREIN) AND SHALL INCLUDE A VISUAL INSPECTION FOR EVIDENCE OF PHYSICAL DAMAGE, DIMENSIONAL DISCREPANCIES, DEFECTIVE MATERIALS OR FINISHES AND OTHER OBVIOUS DEFECTS.
	PACKAGING.
	PRESERVATION-PACKAGING. UNLESS OTHERWISE SPECIFIED HEREIN. THE PRESERVATION-PACKAGING SHALL BE IN ACCORDANCE WITH (BASE DOCUMENT). IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
7546	PRESERVATION-PACKAGING. PACKAGING SHALL BE IN ACCORDANCE WITH 7546.
7545	PRESERVATION-PACKAGING LEVEL. PRESERVATION-PACKAGING SHALL BE LEVEL A OR C, AS SPECIFIED,

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD (CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
30.18 PRESERVATION-PACKAGING (CONT)	
LEVEL A	7555
MIL-P-116 CLEANING PROCESS (DESIGNATION)	7547
MIL-P-116 DRYING PROCEDURE (DESIGNATION)	7548
PRESERVATION (SELECT ONE)	
MIL-P-116 PRESERVATION TYPE (DESIGNATION)	7566
NO PRESERVATIVES.	7549
UNIT PACKAGING MIL-P-116 SUBMETHOD (NUMBER) 7550	
LEADS MAINTAINED PER APPLICABLE FIGURE	7551
ACCESSORIES ENCLOSED.	7552

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

7555 LEVEL A.

7547 CLEANING. THE ITEM(S) SHALL BE CLEANED IN ACCORDANCE WITH MIL-P-116, PROCESS 7547.

7548 DRYING. THE ITEM(S) SHALL BE DRIED IN ACCORDANCE WITH MIL-P-116, PROCEDURE 7548.

7566 PRESERVATIVE(S). PRESERVATIVE(S) TYPE 7566 IN ACCORDANCE WITH MIL-P-116 SHALL BE USED.

7549 PRESERVATIVE. PRESERVATIVES SHALL NOT BE USED.

7550 UNIT PACKAGING. UNLESS OTHERWISE SPECIFIED, ITEMS SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH MIL-P-116, SUBMETHOD 7550 INSURING COMPLIANCE WITH THE APPLICABLE REQUIREMENTS OF THAT SPECIFICATION .

7551 LEADS SHALL BE MAINTAINED IN THE CONFIGURATION SHOWN ON THE FIGURE WITHOUT DAMAGE TO THE ITEM.

7552 ACCESSORIES SHALL BE PHYSICALLY PROTECTED AND ENCLOSED IN THE UNIT PACKAGE IN A MANNER THAT WILL NOT DAMAGE THE ITEM OR PACKAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
30.18 PRESERVATION-PACKAGING (CONT)	
LEVEL A (CONT)	
INTERMEDIATE PACKAGING	
MAXIMUM PER CONTAINER (QUANTITY)	7553
*MINIMUM NUMBER REQUIRING INTERMEDIATE PACKAGING (QUANTITY)	7554
LEVEL C	
ADEQUATE PROTECTION.	7557
30.19 PACKING.	
PER ORDER.	7558
LEVEL A (SELECT ONE)	
TWO INCH TAPE.	7559

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH	
7553	INTERMEDIATE PACKAGING.	ITEMS PACKAGED AS DESCRIBED IN THE UNIT PACKAGE REQUIREMENT, SHALL BE PLACED IN INTERMEDIATE CONTAINERS CONFORMING TO PPP-B-566 OR PPP-B-676. INTERMEDIATE CONTAINERS SHALL BE UNIFORM IN SIZE, SHAPE, AND QUANTITIES, SHALL BE OF MINIMUM TARE AND
7554		CUBE AND SHALL CONTAIN MULTIPLES OF FIVE UNIT PACKAGES, NOT TO EXCEED 7553 UNIT PACKAGES. NO INTERMEDIATE PACKAGING IS REQUIRED WHEN 'THE TOTAL QUANTITY SHIPPED TO A SINGLE DESTINATION IS LESS THAN 7554 UNIT PACKAGES.
7557	LEVEL C.	EACH ITEM SHALL BE CLEAN, DRY, AND INDIVIDUALLY PACKAGED IN A MANNER THAT WILL AFFORD ADEQUATE PROTECTION AGAINST CORROSION, DETERIORATION AND PHYSICAL DAMAGE DURING SHIPMENT FROM SUPPLY SOURCE TO THE FIRST RECEIVING ACTIVITY.
7558	PACKING.	PACKING SHALL BE LEVEL A, B, OR C, AS SPECIFIED.
7559	LEVEL A.	THE PACKAGED ITEMS SHALL BE PACKED IN FIBERBOARD CONTAINERS CONFORMING TO PPP-B-636, CLASS WEATHER RESISTANT, STYLE OPTIONAL, SPECIAL REQUIREMENTS. IN THE APPENDIX OF PPP-B-636, CLOSURE AND WEATHERPROOFING SHALL BE ACCOMPLISHED BY SEALING ALL SEAMS, CORNERS AND MANUFACTURER'S JOINT WITH TAPE, TWO INCHES MINIMUM WIDTH, CONFORMING TO PPP-T-60 CLASS 1 OR PPP-T-76. BANDING (REINFORCEMENT REQUIREMENTS) SHALL BE APPLIED IN ACCORDANCE WITH THE APPENDIX TO PPP-B-636 USING NONMETALLIC OR TAPE BANDING ONLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
30.19 PACKING (CONT)	
50 MILLIMETER TAPE.	7511
LEVEL B	
DOMESTIC.	7560
LEVEL C	
ADEQUATE	7561
UNITIZED LOADS (SELECT ONE)	
40 CUBIC FEET.	7562

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7511	LEVEL A. THE PACKAGED ITEMS SHALL BE PACKED IN FIBERBOARD CONTAINER CONFORMING TO PPP-B-636, CLASS WEATHER RESISTANT, STYLE OPTIONAL, SPECIAL REQUIREMENTS. IN THE APPENDIX OF PPP-B-636, CLOSURE AND WATERPROOFING SHALL BE ACCOMPLISHED BY SEALING ALL SEAMS, CORNERS AND MANUFACTURER'S JOINT WITH TAPE, 50 MILLIMETER MINIMUM WIDTH, CONFORMING TO PPP-T-60, CLASS 1 OR PPP-T-76. BANDING (REINFORCEMENT REQUIREMENTS) SHALL BE APPLIED IN ACCORDANCE WITH THE APPENDIX TO PPP-B-636 USING NONMETALLIC OR TAPE BANDING ONLY.
7560	LEVEL B. THE PACKAGED ITEMS SHALL BE PACKED IN FIBERBOARD CONTAINERS CONFORMING TO PPP-B-636, CLASS DOMESTIC, STYLE OPTIONAL, SPECIAL REQUIREMENTS. CLOSURES SHALL BE IN ACCORDANCE WITH THE APPENDIX THERETO.
7561	LEVEL C. THE PACKAGED ITEMS SHALL BE PACKED IN SHIPPING CONTAINERS IN A MANNER THAT WILL AFFORD ADEQUATE PROTECTION AGAINST DAMAGE DURING DIRECT SHIPMENT AND FROM THE SUPPLY SOURCE TO THE FIRST RECEIVING ACTIVITY. THESE PACKS SHALL CONFORM TO THE APPLICABLE CARRIER REGULATIONS.
7562	UNITIZED LOADS. UNITIZED LOADS, COMMENSURATE WITH THE LEVEL OF PACKING SPECIFIED IN THE CONTRACT, SHALL BE USED WHENEVER TOTAL QUANTITIES FOR SHIPMENT TO ONE DESTINATION EQUAL 40 CUBIC FEET OR MORE. QUANTITIES LESS THAN 40 CUBIC FEET NEED NOT BE UNITIZED. UNITIZED LOADS SHALL BE UNIFORM IN SIZE AND QUANTITIES TO THE GREATEST EXTENT PRACTICABLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
30.19 PACKING (CONT)	
ONE CUBIC METER.	7515
LEVEL A	
STORAGE AID 4.	7563
LEVEL B	
DOMESTIC.	7564
LEVEL C	
ADEQUATE.	7565
OTHER PREPARATION FOR DELIVERY SHALL BE IN ACCORDANCE WITH (DOC DES)	4690

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH	
7515	UNITIZED LOADS.	UNITIZED LOADS, COMMENSURATE WITH THE LEVEL OF PACKING SPECIFIED IN THE CONTRACT, SHALL BE USED WHENEVER TOTAL QUANTITIES FOR SHIPMENT TO ONE DESTINATION EQUAL ONE CUBIC METER OR MORE. QUANTITIES LESS THAN ONE CUBIC METER NEED NOT BE UNITIZED. UNITIZED LOADS SHALL BE UNIFORM IN SIZE AND QUANTITIES TO THE GREATEST EXTENT PRACTICABLE.
7563	LEVEL A.	ITEMS PACKED AS SPECIFIED IN PACKING LEVEL A, SHALL BE UNITIZED ON PALLETS IN CONFORMANCE TO MIL-STD-147, LOAD TYPE I, WITH A FIBERBOARD CAP (STORAGE AID 4) POSITIONED OVER THE LOAD.
7564	LEVEL B.	ITEMS PACKED AS SPECIFIED IN PACKING LEVEL B, SHALL BE UNITIZED ON PALLETS IN CONFORMANCE TO MIL-STD-147, LOAD TYPE I, WITH A FIBERBOARD CAP (CLASS DOMESTIC) POSITIONED OVER THE LOAD.
7565	LEVEL C.	ITEMS PACKED AS SPECIFIED IN PACKING LEVEL C, SHALL BE UNITIZED WITH PALLETS AND CAPS OF THE TYPE, SIZE AND KIND COMMONLY USED FOR THE PURPOSE AND SHALL CONFORM TO THE APPLICABLE CARRIER RULES AND REGULATIONS.
4690	OTHER PREPARATION.	OTHER PREPARATION FOR DELIVERY SHALL BE IN ACCORDANCE WITH 4690.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
30.20 ADDITIONAL PACKAGING REQUIREMENTS (SEE 5.14.4)	
A	7006
B	7007
C	7008
D	7009
E	7010
30.21 MARKING	
PER MIL-STD-129.	7570
30.22 GENERAL	
EXTERIOR CONTAINERS MINIMUM TARE, CUBE, AND QUANTITY.	7571
30.23 NOTES	
NOTE: AUTOMATIC IN EACH MSE.	
INTENDED USE	6223
30.24 SUPERSEDED DOCUMENT (SEE 5.19 AND TABLE XXV)	
NOTE: AUTOMATIC WHEN TABLE XXV IS USED.	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ADDITIONAL PACKAGING REQUIREMENTS.
7006	(A) 7006
7007	(B) 7007.
7008	(C) 7008.
7009	(D) 7009.
7010	(E) 7010.

MARKING. IN ADDITION TO ANY SPECIAL MARKING REQUIRED BY THE CONTRACT, EACH UNIT PACKAGE, INTERMEDIATE AND EXTERIOR CONTAINER AND UNITIZED LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-129.

7571 GENERAL EXTERIOR CONTAINERS (SEE PACKING, LEVEL A, B, AND C) SHALL BE A MINIMUM TARE AND CUBE CONSISTENT WITH THE PROTECTION REQUIRED AND SHALL CONTAIN EQUAL QUANTITIES OF IDENTICAL STOCK NUMBERED ITEMS TO THE GREATEST EXTENT PRACTICABLE.

NOTES.

6223 INTENDED USE. ITEMS COVERED BY THIS DOCUMENT ARE INTENDED FOR 6223.

SUPERSEDED DOCUMENT(S). THIS DOCUMENT SUPERSEDES THE DOCUMENT(S) SHOWN IN THE FOLLOWING TABLE:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
30.25 PART NUMBER CROSS-REFERENCE (SEE TABLE XXVI)	
NOTE: AUTOMATIC WHEN TABLE XXVI IS USED.	
30.26 LOT CONTROL	
NOTE: AUTOMATIC WHEN CODE 1530 OR 1531 IS USED.	
SHIPMENT LOT	
DEFINITION.	1530
LOT IDENTIFICATION	
DEFINITION.	1531
30.27 DATA REQUIREMENTS	
SUMMARIZED REPORT PER LOT.	7432

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

PART NUMBER CROSS-REFERENCE. PART NUMBERS OF THE CANCELLED DOCUMENT WITH EQUIVALENT PART NUMBERS OF SUPERSEDING DOCUMENT ARE SHOWN IN THE FOLLOWING TABLE:

LOT CONTROL. WHEN SPECIFIED IN THE CONTRACT OR PURCHASE ORDER.

1530 SHIPMENT LOT. A SHIPMENT LOT SHALL BE DEFINED AS THAT QUANTITY SPECIFIED AND ASSIGNED A SPECIFIC LOT NUMBER ON THE PURCHASE ORDER. IT MAY BE MADE UP FROM ONE OR MORE 100 PERCENT INSPECTION LOTS.

1531 LOT IDENTIFICATION. ALL PARTS BELONGING TO A SHIPMENT LOT SHALL BE MARKED WITH AN ALPHA-NUMERIC CODE CONSISTING OF A THREE DIGIT NUMBER ASSIGNED BY THE PROCURING ACTIVITY TO IDENTIFY A SHIPMENT LOT. THE LOT NUMBER SHALL BE PRECEDED BY AN ALPHA CHARACTER ASSIGNED BY THE VENDOR TO IDENTIFY 100 PERCENT INSPECTION LOT. DIFFERENT ALPHA CHARACTERS SHALL BE ASSIGNED TO IDENTIFY ADDITIONAL INSPECTION LOTS. ADDITIONAL ALPHA CHARACTERS MAY BE ASSIGNED AT THE DISCRETION OF THE VENDOR TO IDENTIFY VENDOR LOTS. THE LETTERS I, O, AND Q SHALL NOT BE USED.

7432 DATA REQUIREMENTS. THE VENDOR SHALL FORWARD A SUMMARIZED REPORT FOR EACH SHIPMENT LOT INDICATING AS A MINIMUM, THE PURCHASE ORDER NUMBER, DATA AND QUANTITY, INCLUDING ACCEPTANCE TEST DATE, AND LOT IDENTIFICATION NUMBER IDENTIFYING THE DATA AS PERTINENT TO A SPECIFIC INSPECTION LOT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISITIC NAME	CHAR CODE
30.28 NOMENCLATURE TABLE (SEE 5.17 AND TABLE XXVII)	
NOTE: AUTOMATIC WHEN TABLE XXVII IS USED.	
30.29 PRIOR ACCEPTANCE	
REPRESENTATIVE OF A PRODUCT.	6949
30.30 ADDITIONAL NOTES (SEE 5.18.5)	
A ____	7016
B ____	7017
C ____	7018
D ____	7019
E ____	7020

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

NOMENCLATURE TABLE. FOR PURPOSES OF THIS DOCUMENT, THE FOLLOWING TABLE IS FURNISHED TO CLARIFY DIFFERENCES BETWEEN NOMENCLATURE IN THE BASE DOCUMENT AND AS USED HEREIN.

6949 PRIOR ACCEPTANCE. ITEMS FURNISHED TO THIS DOCUMENT? SHALL BE REPRESENTATIVE OF A PRODUCT WHICH HAS BEEN ACCEPTED BY THE PROCURING ACTIVITY. NO SUBSTITUTION OF MATERIALS AND PROCESS OR CHANGE IN DESIGN SHALL BE MADE WITHOUT PRIOR APPROVAL OF THE PROCURING ACTIVITY WHEN SUCH CHANGE EFFECTS INTERCHANGEABILITY WITH RESPECT TO INSTALLATION, PERFORMANCE, OR DESIGN WITHIN THE RETIREMENTS OF THIS DOCUMENT.

ADDITIONAL NOTES.

7016 (A) 7016.

7017 (B) 7017.

7018 (C) 7018.

7019 (D) 7019.

7020 (E) 7020.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX A

THIS PAGE WAS INTENTIONALLY LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLES

10. GENERAL.

10.1 SCOPE. This Appendix contains Tables applicable to this standard and many of the dash-numbered parts. The Tables are placed here for convenience. The dash-numbered parts of this standard will refer to this Appendix as required for generation of Tables. See paragraph 5.4 for instructions on how to use Tables. This Appendix is a mandatory part of the standard. The information contained herein is intended for compliance as needed.

20. APPLICABLE DOCUMENTS. This section is not applicable to this Appendix.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE II. APPLICABLE DOCUMENTS

SPECIFICATIONS FEDERAL	STANDARDS FEDERAL	HANDBOOKS FEDERAL
6015	6055	6115
6016	6056	6116
6017	6057	6117
6018	6058	6118
6019	6059	6119
6020	6060	6120
6021	6061	6121
6022	6062	6122
6023	6063	6123
6024	6064	6124
6025	6065	6125
6026	6066	6126
6027	6067	6127
6028	6068	6128
6029	6069	6129
6030	6070	6130
6031	6071	6131
6032	6072	6132
6033	6073	6133
6034	6074	6134
MILITARY	MILITARY	MILITARY
6035	6075	6135
6036	6076	6136
6037	6077	6137
6038	6078	6138
6039	6079	6139
6040	6080	6140
6041	6081	6141
6042	6082	6142
6043	6083	6143
6044	6084	6144
6045	6085	6145
6046	6086	6146
6047	6087	6147
6048	6088	6148
6049	6089	6149
6050	6090	6150
6051	6091	6151
6052	6092	6152
6053	6093	6153
6054	6094	6154

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE II. APPLICABLE DOCUMENTS (cont)

DRAWINGS	PUBLICATIONS	OTHER PUBLICATIONS
6950	6095	6155
6951	6096	6156
6952	6097	6157
6953	6098	6158
6954	6099	6159
6955	6100	6160
6956	6101	6161
6957	6102	6162
6958	6103	6163
6959	6104	6164
6960	6105	6165
6961	6106	6166
6962	6107	6167
6963	6108	6168
6964	6109	6169
6965	6110	6170
6966	6111	6171
6967	6112	6172
6968	6113	6173
6969	6114	6174
6970		
6971		NAME AND ADDRESS
6972		
6973		7851
6974		7852
6975		7853
6976		7854
6977		7855
6978		
6979		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE III. DIMENSION/TABULATION CANDIDATES

COLUMN CODE	HEADING	COLUMN CODE	COLUMN HEADING	CODE	HEADING
1010	AA	1011	AA MIN	1012	AA MAX
1013	AB	1014	AB MIN	1015	AB MAX
1016	AC	1017	AC MIN	1018	AC MAX
1019	AD	1020	AD MIN	1021	AD MAX
1022	AE	1023	AE MIN	1024	AE MAX
1025	AF	1026	AF MIN	1027	AF MAX
1028	AG	1029	AG MIN	1030	AG MAX
1031	AH	1032	AH MIN	1033	AH MAX
1034	AJ	1035	AJ MIN	1036	AJ MAX
1037	AK	1038	AK MIN	1039	AK MAX
1040	AL	1041	AL MIN	1042	AL MAX
1043	AM	1044	AM MIN	1045	AM MAX
1046	AN	1047	AN MIN	1048	AN MAX
1049	AP	1050	AP MIN	1051	AP MAX
1052	AQ	1053	AQ MIN	1054	AQ MAX
1055	AR	1056	AR MIN	1057	AR MAX
1058	As	1059	AS MIN	1060	AS MAX
1061	AT	1062	AT MIN	1063	AT MAX
1064	AU	1065	AU MIN	1066	AU MAX
1067	AV	1068	AV MIN	1069	AV MAX
1070	AW	1071	AW MIN	1072	AW MAX
1073	AX	1074	AX MIN	1075	AX MAX
1076	AY	1077	AY MIN	1078	AY MAX
1079	AZ	1080	AZ MIN	1081	AZ MAX
1082	BA	1083	BA MIN	1084	BA MAX
1085	BB	1086	BB MIN	1087	BB MAX
1088	BC	1089	BC MIN	1090	BC MAX
1091	BD	1092	BD MIN	1093	BD MAX
1094	BE	1095	BE MIN	1096	BE MAX
1097	BF	1098	BF MIN	1099	BF MAX
1100	BG	1101	BG MIN	1102	BG MAX
1103	BH	1104	BH MIN	1105	BH MAX
1106	BJ	1107	BJ MIN	1108	BJ MAX
1109	BK	1110	BK MIN	1111	BK MAX
1112	BL	1113	BL MIN	1114	BL MAX
1115	BM	1116	BM MIN	1117	BM MAX
1118	BN	1119	BN MIN	1120	BN MAX
1121	BP	1122	BP MIN	1123	BP MAX
1124	BQ	1125	BQ MIN	1126	BQ MAX
1127	BR	1128	BR MIN	1129	BR MAX
1130	BS	1131	BS MIN	1132	BS MAX
1133	BT	1134	BT MIN	1135	BT MAX
1136	BU	1137	BU MIN	1138	BU MAX
1139	BV	1140	BV MIN	1141	BV MAX
1142	BW	1143	BW MIN	1144	BW MAX
1145	BX	1146	BX MIN	1147	BX MAX
1148	BY	1149	BY MIN	1150	BY MAX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE III. DIMENSION/TABULATION CANDIDATES (cont)

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1151	BZ	1152	BZ MIN	1153	BZ MAX
1154	CA	1155	CA MIN	1156	CA MAX
1157	CB	1158	CB MIN	1159	CB MAX
1160	CC	1161	CC MIN	1162	CC MAX
1163	CD	1164	CD MIN	1165	CD MAX
1166	CE	1167	CE MIN	1168	CE MAX
1169	CF	1170	CF MIN	1171	CF MAX
1172	CG	1173	CG MIN	1174	CG MAX
1175	CH	1176	CH MIN	1177	CH MAX
1178	CJ	1179	CJ MIN	1180	CJ MAX
1181	CK	1182	CK MIN	1183	CK MAX
1184	CL	1185	CL MIN	1186	CL MAX
1187	CM	1188	CM MIN	1189	CM MAX
1190	CN	1191	CN MIN	1192	CN MAX
1193	CP	1194	CP MIN	1195	CP MAX
1196	CQ	1197	CQ MIN	1198	CQ MAX
1199	CR	1200	CR MIN	1201	CR MAX
1202	CS	1203	CS MIN	1204	CS MAX
1205	CT	1206	CT MIN	1207	CT MAX
1208	CU	1209	CU MIN	1210	CU MAX
1211	CV	1212	CV MIN	1213	CV MAX
1214	CW	1215	CW MIN	1216	CW MAX
1217	CX	1218	CX MIN	1219	CX MAX
1220	CY	1221	CY MIN	1222	CY MAX
1223	CZ	1224	CZ MIN	1225	CZ MAX
1226	DA	1227	DA MIN	1228	DA MAX
1229	DB	1230	DB MIN	1231	DB MAX
1232	DC	1233	DC MIN	1234	DC MAX
1235	DD	1236	DD MIN	1237	DD MAX
1238	DE	1239	DE MIN	1240	DE MAX
1241	DF	1242	DF MIN	1243	DF MAX
1244	DG	1245	DG MIN	1246	DG MAX
1247	DH	1248	DH MIN	1249	DH MAX
1250	DJ	1251	DJ MIN	1252	DJ MAX
1253	DK	1254	DK MIN	1255	DK MAX
1256	DL	1257	DL MIN	1258	DL MAX
1259	DM	1260	DM MIN	1261	DM MAX
1262	DN	1263	DN MIN	1264	DN MAX
1265	DP	1266	DP MIN	1267	DP MAX
1268	DQ	1269	DQ MIN	1270	DQ MAX
1271	DR	1272	DR MIN	1273	DR MAX
1274	DS	1275	DS MIN	1276	DS MAX
1277	DT	1278	DT MIN	1279	DT MAX
1280	DU	1281	DU MIN	1282	DU MAX
1283	DV	1284	DV MIN	1285	DV MAX
1286	DW	1287	DW MIN	1288	DW MAX
1289	DX	1290	DX MIN	1291	DX MAX
1292	DY	1293	DY MIN	1294	DY MAX

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE III. DIMENSION/TABULATION CANDIDATES (cont)

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1295	DZ	1296	DZ MIN	1297	DZ MAX
1298	EA	1299	EA MIN	1300	EA MAX
1301	EB	1302	EB MIN	1303	EB MAX
1304	EC	1305	EC MIN	1306	EC MAX
1307	ED	1308	ED MIN	1309	ED MAX
1310	EE	1311	EE MIN	1312	EE MAX
1313	EF	1314	EF MIN	1315	EF MAX
1316	EG	1317	EG MIN	1318	EG MAX
1319	EH	1320	EH MIN	1321	EH MAX
1322	EJ	1323	EJ MIN	1324	EJ MAX
1325	EK	1326	EK MIN	1327	EK MAX
1328	EL	1329	EL MIN	1330	EL MAX
1331	EM	1332	EM MIN	1333	EM MAX
1334	EN	1335	EN MIN	1336	EN MAX
1337	EP	1338	EP MIN	1339	EP MAX
1340	EQ	1341	EQ MIN	1342	EQ MAX
1343	ER	1344	ER MIN	1345	LR MAX
1346	ES	1347	ES MIN	1348	ES MAX
1349	ET	1350	ET MIN	1351	ET MAX
1352	EU	1353	EU MIN	1354	EU MAX
1355	EV	1356	EV MIN	1357	EV MAX
1358	HT	1359	HT MIN	1360	HT MAX
1361	ID	1362	ID MIN	1363	ID MAX
1364	OD	1365	OD MIN	1366	OD MAX
1367	TH	1368	TH MIN	1369	TH MAX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE IV. TABULATED CHARACTERISTICS TABLE

SUFFIX No.	8AAA	8BAA	8CAA	8DAA	8EA
01	8AAB	8BAB	8CAB	8DAB	8EAB
02	8AAC	8BAC	8CAC	8DAC	8EAC
03	8AAD	8BAD	8CAD	8DAD	8EAD
04	8AAE	8BAE	8CAE	8DAE	8EAE
05	8AAF	8BAF	8CAF	8DAF	8EAF
06	8AAG	8BAG	8CAG	8DAG	8EAG
07	8AAH	8BAH	8CAH	8DAH	8EAH
08	8AAI	8BAI	8CAI	8DAI	8EAI
09	8AAJ	8BAJ	8CAJ	8DAJ	8EAH
10	8AAK	8BAK	8CAK	8DAK	8EAK
11	8AAL	8BAK	8CAL	8DAL	8EAL
12	8AAM	8BAM	8CAM	8DAM	8EAM
13	8AAN	8BAN	8CAN	8DAN	8EAN
14	8AAO	8BAO	8CAO	8DAO	8EAO
15	8AAP	8BAP	8CAP	8DAP	8EAP
16	8AAQ	8BAQ	8CAQ	8DAQ	8EAQ
17	8AAR	8BAR	8CAR	8DAR	8EAR
18	8AAS	8BAS	8CAS	8DAS	8EAS
19	8AAT	8BAT	8CAT	8DAT	8EAT
20	8AAU	8BAU	8CAU	8DAU	8EAU
21	8AAV	8BAV	8CAV	8DAV	8EAV
22	8AAW	8BAW	8CAW	8DAW	8EAW
23	8AAX	8BAX	8CAX	8DAX	8EAX
24	8AAY	8BAY	8CAY	8DAY	8EAY
25	8AAZ	8BAZ	8CAZ	8DAZ	8EAZ
26	8ABA	8BBA	8CBA	8DBA	8EBA
27	8ABB	8BBB	8CBB	8DBB	8EBB
28	8ABC	8BBC	8CBC	8DBC	8EBC
29	8ABD	8BBD	8CBD	8DBD	8EBD
30	8ABE	8BBE	8CBE	8DBE	8EBE
31	8ABF	8BBF	8CBF	8DBF	8EBF
32	8ABG	8BBG	8CBG	8DBG	8EBG
33	8ABH	8BBH	8CBH	8DBH	8EBH

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE IV. TABULATED CHARACTERISTICS TABLE (cont)

SUFFIX NO.	8AAA (cont)	8BAA (cont)	8CAA (cont)	8DAA (cont)	8EAA (cont)
34	8ABI	8BBI	8CBI	8DBI	8EBI
35	8ABJ	8BBJ	8CBJ	8DBJ	8EBJ
36	8ABK	8BBK	8CBK	8DBK	8EBK
37	8ABL	8BBL	8CBL	8DBL	8EBL
38	8ABM	8BBM	8CBM	8DBM	8EBM
39	8ABN	8BBN	8CBN	8DBN	8EBN
40	8ABO	8BBO	8CBO	8DBO	8EBO
41	8ABP	8BBP	8CBP	8DBP	8EBP
42	8ABQ	8BBQ	8CBQ	8DBQ	8EBQ
43	8ABR	8BBR	8CBR	8DBR	8EBR
44	8ABS	8BBS	8CBS	8DBS	8EBS
45	8ABT	8BBT	8CBT	8DBT	8EBT
46	8ABU	8BBU	8CBU	8DBU	8EBU
47	8ABV	8BBV	8CBV	8DBV	8EBV
48	8ABW	8BBW	8CBW	8DBW	8EBW
49	8ABX	8BBX	8CBX	8DBX	8EBX
50	8ABY	8BBY	8CBY	8DBY	8EBY
51	8ABZ	8BBZ	8CBZ	8DBZ	8EBZ
52	8ACA	8BCA	8CCA	8DCA	8ECA
53	8ACB	8BCB	8CCB	8DCB	8ECB
54	8ACC	8BCC	8CCC	8DCC	8ECC
55	8ACD	8BCD	8CCD	8DCD	8ECD
56	8ACE	8BCE	8CCE	8DCE	8ECE
57	8ACF	8BCE	8CCF	8DCF	8ECF
58	8ACG	8BCG	8CCG	8DCG	8ECG
59	8ACH	8BCH	8CCH	8DCH	8ECH
60	8ACI	8BCI	8CCI	8DCI	8ECI
61	8ACJ	8BCJ	8CCJ	8DCJ	8ECJ
62	8ACK	8BCK	8CCK	8DCK	8ECK
63	8ACL	8BCL	8CCL	8DCL	8ECL
64	8ACM	8BCM	8CCM	8DCM	8ECM
65	8ACN	8BCN	8CCN	8DCN	8ECN
66	8ACO	8BCO	8CCO	8DCO	8ECO

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE IV. TABULATED CHARACTERISTICS TABLE (cont)

SUFFIX NO.	8AAA (cont)	8BAA (cont)	8CAA (cont)	8DAA(cont)	8EAA (cont)
67	8ACP	8BCP	8CCP	8DCP	8ECP
68	8ACQ	8BCQ	8CCQ	8DCQ	8ECQ
69	8ACR	8BCR	8CCR	8DCR	8ECR
70	8ACS	8BCS	8CCS	8DCS	8ECS
71	8ACT	8BCT	8CCT	8DCT	8ECT
72	8ACU	8BCU	8CCU	8DCU	8ECU
73	8ACV	8BCV	8CCV	8DCV	8ECV
74	8ACW	8BCW	8CCW	8DCW	8ECW
75	8ACX	8BCX	8CCX	8CDX	8ECX
76	8ACY	8BCY	8CCY	8DCY	8ECY
77	8ACZ	8BCZ	8CCZ	8DCZ	8ECZ
78	8ADA	8BDA	8CDA	8DDA	8EDA
79	8ADB	8BDB	8CDB	8DDB	8EDB
80	8ADC	8BDC	8CDC	8DDC	8EDC
81	8ADD	8BDD	8CDD	8DDD	8EDD
82	8ADE	8BDE	8CDE	8DDE	8EDE
83	8ADF	8BDF	8CDF	8DDF	8EDF
84	8ADG	8BDG	8CDG	8DDG	8EDG
85	8ADH	8BDH	8CDH	8DDH	8EDH
86	8ADI	8BDI	8CDI	8DDI	8EDI
87	8ADJ	8BDJ	8CDJ	8DDJ	8EDJ
88	8ADK	8BDK	8CDK	8DDK	8EDK
89	8ADL	8BDL	8CDL	8DDL	8EDL
90	8ADM	8BDM	8CDM	8DDM	8EDM
91	8ADN	8BDN	8CDN	8DDN	8EDN
92	8ADO	8BDO	8CDO	8DDO	8EDO
93	8ADP	8BDP	8CDP	8DDP	8EDP
94	8ADQ	8BDQ	8CDQ	8DDQ	8EDQ
95	8ADR	8BDR	8CDR	8DDR	8EDR
96	8ADS	8BDS	8CDS	8DDS	8EDS
97	8ADT	8BDT	8CDT	8DDT	8EDT
98	8ADU	8BDU	8CDU	8DDU	8EDU
99	8ADV	8BDV	8CDV	8DDV	8EDV
100	8ADW	8BDW	8CDW	8DDW	8EDW

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE IV. TABULATED CHARACTERISTICS TABLE (cont)

SUFFIX NO.	8FAA	8GAA	8HAA	8IAA	8JAA
01	8FAB	8GAB	8HAB	8IAB	8JAB
02	8FAC	8GAC	8HAC	8IAC	8JAC
03	8FAD	8GAD	8HAD	8IAD	8JAD
04	8FAE	8GAE	8HAE	8IAE	8JAE
05	8FAF	8GAF	8HAF	8IAF	8JAF
06	8FAG	8GAG	8HAG	8IAG	8JAG
07	8FAH	8GAH	8HAH	8IAH	8JAH
08	8FAI	8GAI	8HAI	8IAI	8JAI
09	8FAJ	8GAJ	8HAJ	8IAJ	8JAH
10	8FAK	8GAK	8HAK	8IAK	8JAK
11	8FAL	8GAK	8HAL	8IAL	8JAL
12	8FAM	8GAM	8HAM	8IAM	8JAM
13	8FAN	8GAN	8HAN	8 IAN	8JAN
14	8FAO	8GA0	8HAO	8IAO	8JAO
15	8FAP	8GAP	8HAP	8IAP	8JAP
16	8FAQ	8GAQ	8HAQ	8IAQ	8JAQ
17	8FAR	8GAR	8HAR	8IAR	8JAR
18	8FAS	8GAS	8HAS	8IAS	8JAS
19	8FAT	8GAT	8HAT	8IAT	8JAT
20	8FAU	8GAU	8HAU	8IAU	8JAU
21	8FAV	8GAV	8HAV	8IAV	8JAV
22	8FAW	8GAW	8HAW	8IAW	8JAW
23	8FAX	8GAX	8HAX	8IAX	8JAX
24	8FAY	8GAY	8HAY	8IAY	8JAY
25	8FAZ	8GAZ	8HAZ	8IAZ	8JAZ
26	8FBA	8GBA	8HBA	8IBA	8JBA
27	8FBB	8GBB	8HBB	8IBB	8JBB
28	8FBC	8GBC	8HBC	8IBC	8JBC
29	8FBD	8GBD	8HBD	8IBD	8JBD
30	8FBE	8GBE	8HBE	8IBE	8JBE
31	8FBF	8GBF	8HBF	8IBF	8JBF
32	8FBG	8GBG	8HBG	8IBG	8JBG
33	8FBH	8GBH	8HBH	8IBH	8JBH

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE IV. TABULATED CHARACTERISTICS TABLE (cont)

SUFFIX No.	8FAA (cont)	8GAA (cont)	8HAA (cont)	8IAA (cont)	8JAA (cont)
34	8FBI	8GBI	8HBI	8IBI	8JBI
35	8FBJ	8GBJ	8HBJ	8IBJ	8JBJ
36	8FBK	8GBK	8HBK	8IBK	8JBK
37	8FBL	8GBL	8HBL	8IBL	8JBL
38	8FBM	8GBM	8HBM	8IBM	8JBM
39	8FBN	8GBN	8HBN	8IBN	8JBN
40	8FBO	8GBO	8HBO	8IBO	8JBO
41	8FBP	8GBP	8HBP	8IBP	8JBP
42	8FBQ	8GBQ	8HBQ	8IBQ	8JBQ
43	8FBR	8GBR	8HBR	8IBR	8JBR
44	8FBS	8GBS	8HBS	8IBS	8JBS
45	8FBT	8GBT	8HBT	8IBT	8JBT
46	8FBU	8GBU	8HBU	8IBU	8JBU
47	8FBV	8GBV	8HBV	8IBV	8JBV
48	8FBW	8GBW	8HBW	8IBW	8JBW
49	8FBX	8GBX	8HBX	8IBX	8JBX
50	8FBY	8GBY	8HBY	8IBY	8JBY
51	8FBZ	8GBZ	8HBZ	8IBZ	8JBZ
52	8FCA	8GCA	8HCA	8ICA	8JCA
53	8FCB	8GCB	8HCB	8ICB	8JCB
54	8FCC	8GCC	8HCC	8ICC	8JCC
55	8FCD	8GCD	8HCD	8ICD	8JCD
56	8FCE	8GCE	8HCE	8ICE	8JCE
57	8FCF	8GCF	8HCF	8ICF	8JCF
58	8FCG	8GCG	8HCG	8ICG	8JCG
59	8FCH	8GCH	8HCH	8ICH	8JCH
60	8FCI	8BCI	8HCI	8ICI	8JCI
61	8FCJ	8GCJ	8HCJ	8DCJ	8JCJ
62	8FCK	8GCK	8HCK	8ICK	8JCK
63	8FCL	8GCL	8HCL	8ICL	8JCL
64	8FCM	8GCM	8HCM	8ICM	8JCM
65	8FCN	8GCN	8HCN	8ICN	8JCN
66	8FCO	8GCO	8HCO	8ICO	8JCO

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE IV. TABULATED CHARACTERISITICS TABLE (cont)

SUFFIX No.	8FAA (cont)	8GAA (cont)	8HAA (cont)	8IAA (cont)	8JAA (cont)
57	8FCP	8GCP	8HCP	8ICP	8JCP
68	8FCQ	8GCQ	8HCQ	8ICQ	8JCQ
69	8FCR	8GCR	8HCR	8ICR	8JCR
70	8FCS	8GCS	8HCS	8ICS	8JCS
71	8FCT	8GCT	8HCT	8ICT	8JCT
72	8FCU	8GCU	8HCU	8ICU	8JCU
73	8FCV	8GCV	8HCV	8ICV	8JCV
74	8FCW	8GCW	8HCW	8ICW	8JCW
75	8FCX	8GCX	8HCX	8ICX	8JCX
76	8FCY	8GCY	8HCY	8ICY	8JCY
'77	8FCZ	8GCZ	8HCZ	8ICZ	8JCZ
78	8FDA	8GDA	8HDA	8IDA	8JDA
79	8FDB	8GDB	8HDB	8IDB	8JDB
80	8FDC	8GDC	8HDC	8IDC	8JDC
81	8FDD	8GDD	8HDD	8IDD	8JDD
82	8FDE	8GDE	8HDE	8IDE	8JDE
83	8FDF	8GDF	8HDF	8IDF	8JDF
84	8FDG	8GDG	8HDG	8IDG	8JDG
85	8FDH	8GDH	8HDH	8IDH	8JDH
86	8FDI	8GDI	8HDI	8IDI	8JDI
87	8FDJ	8GDJ	8HDJ	8IDJ	8JDJ
88	8FDK	8GDK	8HDK	8IDK	8JDK
89	8FDL	8GDL	8HDL	8IDL	8JDL
90	8FDM	8GDM	8HDM	8IDM	8JDM
91	8FDN	8GDN	8HDN	8IDN	8JDN
92	8FDO	8GDO	8HDO	8IDO	8JDO
93	8FDP	8GDP	8HDP	8IDP	8JDP
94	8FDQ	8GDQ	8HDQ	8IDQ	8JDQ
95	8FDR	8GDR	8HDR	8IDR	8JDR
96	8FDS	8GDS	8HDS	8IDS	8JDS
97	8FDT	8GDT	8HDT	8IDT	8JDT
98	8FDU	8GDU	8HDU	8IDU	8JDU
99	8FDV	8GDV	8HDV	8IDV	8JDV
100	8FDW	8GDW	8HDW	8IDW	8JDW

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE IV. TABULATED CHARACTERISTICS TABLE (cont)

SUFFIX NO.	8KAA	8LAA	8MAA	8NAA	8OAA
01	8KAB	8LAB	8MAB	8NAB	8OAB
02	8KAC	8LAC	8MAC	8NAC	8OAC
03	8KAD	8LAD	8MAD	8NAD	8OAD
04	8KAE	8LAE	8MAE	8NAE	8OAE
05	8KAF	8LAF	8MAF	8NAF	8OAF
06	8KAG	8LAG	8MAG	8NAG	8OAG
07	8KAH	8LAH	8MAH	8NAH	8OAH
08	8KAI	8LAI	8MAI	8NAI	8OAI
09	8KAJ	8LAJ	8MAJ	8NAJ	8OAH
10	8KAK	8LAK	8MAK	8NAK	8OAK
11	8KAL	8LAK	8MAL	8NAL	8OAL
12	8KAM	8LAM	8MAM	8NAM	8OAM
13	8KAN	8LAN	8MAN	8NAN	8OAN
14	8KAO	8LAO	8MAO	8NAO	8OAO
15	8KAP	8LAP	8MAP	8NAP	8OAP
16	8KAQ	8LAQ	8MAQ	8NAQ	8OAQ
17	8KAR	8LAR	8MAR	8NAR	8OAR
18	8KAS	8LAS	8MAS	8NAS	8OAS
19	8KAT	8LAT	8MAT	8NAT	8OAT
20	8KAU	8LAU	8MAU	8NAU	8OAU
21	8KAV	8LAV	8MAV	8NAV	8OAV
22	8KAW	8LAW	8MAW	8NAW	8OAW
23	8KAX	8LAX	8MAX	8NAX	8OAX
24	8KAY	8LAY	8MAY	8NAY	8OAY
25	8KAZ	8LAZ	8MAZ	8NAZ	8OAZ
26	8KBA	8LBA	8MBA	8NBA	8OBA
27	8KBB	8LBB	8MBB	8NBB	8OBB
28	8KBC	8LBC	8MBC	8NBC	8OBC
29	8KBD	8LBD	8MBD	8NBD	8OBD
30	8KBE	8LDB	8MBE	8NBE	8OBE
31	8KBF	8LBF	8MBF	8NBF	8OBF
32	8KBG	8LBG	8MBG	8NBG	8OBG
33	8KBH	8LBH	8MBH	8NBH	8OBH

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE IV. TABULATED CHARACTERISTICS TABLE (cont)

SUFFIX NO.	8KAA (cont)	8LAA (cont)	8MAA (cont)	8NAA (cont)	8OAA(cont)
34	8KBI	8LBI	8MBI	8NBI	8OBI
35	8KBJ	8LBJ	8MBJ	8NBJ	8OBJ
36	8KBK	8LBK	8MBK	8NBK	8OBK
37	8KBL	8LBL	8MBL	8NBL	8OBL
38	8KBM	8LBM	8MBM	8NBM	8OBM
39	8KBN	8LBN	8MBN	8NBN	8OBN
40	8KBO	8LBO	8MBO	8NBO	8OBO
41	8KBP	8LBP	8MBP	8NBP	8OBP
42	8KBQ	8LBQ	8MBQ	8NBQ	8OBQ
43	8KBR	8LBR	8MBR	8NBR	8OBR
44	8KBS	8LBS	8MBS	8NBS	8JBS
45	8KBT	8LBT	8MBT	8NBT	8OBT
46	8KBU	8LBU	8MBU	8NBU	8OBU
47	8KBV	8LBV	8MBV	8NBV	8OBV
48	8KBW	8LBW	8MBW	8NBW	8OBW
49	8KBX	8LBX	8MBX	8NBX	8OBX
50	8KBY	8LBY	8MBY	8NBY	8OBY
51	8KBZ	8LBZ	8MBZ	8NBZ	8OBZ
52	8KCA	8LCA	8MCA	8NCA	8OCA
53	8KCB	8LCB	8MCB	8NCB	8OCB
54	8KCC	8LCC	8MCC	8NCC	8OCC
55	8KCD	8LCD	8MCD	8NCD	8OCD
56	8KCE	8LCE	8MCE	8NCE	8OCE
57	8KCF	8LCF	8MCF	8NCF	8OCF
58	8KCG	8LCG	8MCG	8NCG	8OCG
59	8KCH	8LCH	8MCH	8NCH	8OCH
60	8KCI	8LCI	8MCI	8NCI	8OCI
61	8KCJ	8LCJ	8MCJ	8NCJ	8OCJ
62	8KCK	8LCK	8MCK	8NCK	8OCK
63	8KCL	8LCL	8MCL	8NCL	8OCL
64	8KCM	8LCM	8MCM	8NCM	8OCM
65	8KCN	8LCN	8MCN	8NCN	8OCN
66	8KCO	8LCO	8MCO	8NCO	8OCO

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE IV. TABULATED CHARACTERISTICS TABLE (cont)

SUFFIX NO.	8KAA (cont)	8LAA (cont)	8MAA (cont)	8NAA (cont)	8OAA (cont)
67	8KCP	8LCP	8MCP	8NCP	8OCP
68	8KCQ	8LCQ	8MCQ	8NCQ	8OCQ
69	8KCR	8LCR	8MCR	8NCR	8OCR
70	8KCS	8LCS	8MCS	8NCS	8OCS
71	8KCR	8LCT	8MCT	8NCT	8OCT
72	8KCU	8LCU	8MCU	8NCU	8OCU
73	8KCV	8LCV	8MCV	8NCV	8OCV
74	8KCW	8LCW	8MCW	8NCW	8OCM
75	8KCX	8LCX	8MCX	8NCX	8OCX
76	8KCY	8LCY	8MCY	8NCY	8OCY
77	8KCZ	8LCZ	8MCZ	8NCZ	8OCZ
78	8KDA	8LDA	8MDA	8NDA	8ODA
79	8KDB	8LDB	8MDB	8NDB	8ODB
80	8KDC	8LDC	8MDC	8NDC	8ODC
81	8KDD	8LDD	8MDD	8NDD	8ODD
82	8KDE	8LDE	8MDE	8NDE	8ODE
83	8KDF	8LDF	8MDF	8NDF	8ODF
84	8KDG	8LDG	8MDG	8NDG	8ODG
85	8KDH	8LDH	8MDH	8NDH	8ODH
86	8KDI	8LDI	8MDI	8NDI	8ODI
87	8KDJ	8LDJ	8MDJ	8NDJ	8ODJ
88	8KDK	8LDK	8MDK	8NDK	8ODK
89	8KDL	8LDL	8MDL	8NDL	8ODL
90	8KDM	8LDM	8MDM	8NDM	8ODM
91	8KDN	8LDN	8MDN	8NDN	8ODN
92	8KDO	8LDO	8MDO	8NDO	8ODO
93	8KDP	8LDP	8MDP	8NDP	8ODP
94	8KDQ	8LDQ	8MDQ	8NDQ	8ODQ
95	8KDR	8LDR	8MDR	8NDR	8ODR
96	8KDS	8LDS	8MDS	8NDS	8ODS
97	8KDT	8LDT	8MDT	8NDT	8ODT
98	8KDU	8LDU	8MDU	8NDU	8ODU
99	8KDV	8LDV	8MDV	8NDV	8ODV
100	8KDW	8LDW	8MDW	8NDW	8ODW

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE IV. TABULATED CHARACTERISTICS TABLE (cont)

SUFFIX NO.	8PAA	8QAA	8RAA	8SAA	8TAA
01	8PAB	8QAB	8RAB	8SAB	8TAB
02	8PAC	8QAC	8RAC	8SAC	8TAC
03	8PAD	8QAD	8RAD	8SAD	8TAD
04	8PAE	8QAE	8RAE	8SAE	8TAE
05	8PAF	8QAF	8RAF	8SAF	8TAF
06	8PAG	8QAG	8RAG	8SAG	8TAG
07	8PAH	8QAH	8RAH	8SAH	8TAH
08	8PAI	8QAI	8RAI	8SAI	8TAI
09	8PAJ	8QAJ	8RAJ	8SAJ	8TAH
10	8PAK	8QAK	8RAK	8SAK	8TAK
11	8PAL	8QAL	8RAL	8SAL	8TAL
12	8PAM	8QAM	8RAM	8SAM	8TAM
13	8PAN	8QAN	8RAN	8SAN	8TAN
14	8PAO	8QAO	8RAO	8SAO	8TAO
15	8PAP	8QAP	8RAP	8SAP	8TAP
16	8PAQ	8QAQ	8RAQ	8SAQ	8TAQ
17	8PAR	8QAR	8RAR	8SAR	8TAR
18	8PAS	8QAS	8RAS	8SAS	8TAS
19	8PAT	8QAT	8RAT	8SAT	8TAT
20	8PAU	8QAU	8RAU	8SAU	8TAU
21	8PAV	8QAV	8RAV	8SAV	8TAV
22	8PAW	8QAW	8RAW	8SAW	8TAW
23	8PAX	8QAX	8RAX	8SAX	8TAX
24	8PAY	8QAY	8RAY	8SAY	8TAY
25	8PAZ	8QAZ	8RAZ	8SAZ	8TAZ
26	8PBA	8QBA	8RBA	8SBA	8TBA
27	8PBB	8QBB	8RBB	8SBB	8TBB
28	8PBC	8QBC	8RBC	8SBC	8TBC
29	8PBD	8QBD	8RBD	8SBD	8TBD
30	8PBE	8QBE	8RBE	8SBE	8TBE
31	8PBF	8QBF	8RBF	8SBF	8TBF
32	8PBG	8QBG	8RBG	8SBG	8TBG
33	8PBH	8QBH	8RBH	8SBH	8TBH

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE IV. TABULATED CHARACTERISTICS TABLE (cont)

SUFFIX NO.	8PAA (cont)	8QAA (cont)	8RAA (cont)	8SAA (cont)	8TAA (cont)
34	8PBI	8QBI	8RBI	8SBI	8TBI
35	8PBJ	8QBJ	8RBJ	8SBJ	8TBJ
36	8PBK	8QBK	8RBK	8SBK	8TBK
37	8PBL	8QBL	8RBL	8SBL	8TBL
38	8PBM	8QBM	8RBM	8SBM	8TBM
39	8PBN	8QBN	8RBN	8SBN	8TBN
40	8PBO	8QBO	8RBO	8SBO	8TBO
41	8PBP	8QBP	8RBP	8SBP	8TBP
42	8PBQ	8QBQ	8RBQ	8SBQ	8TBQ
43	8PBR	8QBR	8RBR	8SBR	8TBR
44	8PBS	8QBS	8RBS	8SBS	8TBS
45	8PBT	8QBT	8RBT	8SBT	8TBT
46	8PBU	8QBU	8RBU	8SBU	8TBU
47	8PBV	8QBV	8RBV	8SBV	8TBV
48	8PBW	8QBW	8RBW	8SBW	8TBW
49	8PBX	8QBX	8RBX	8SBX	8TBX
50	8PBY	8QBY	8RBY	8SBY	8TBY
51	8PBZ	8QBZ	8RBZ	8SBZ	8TBZ
52	8PCA	8QCA	8RCA	8SCA	8TCA
53	8PCB	8QCB	8RCB	8SCB	8TCB
54	8PCC	8QCC	8RCC	8SCC	8TCC
55	8PCD	8QCD	8RCD	8SCD	8TCD
56	8PCE	8QCE	8RCE	8SCE	8TCE
57	8PCF	8QCF	8RCF	8SCF	8TCF
58	8PCG	8QCG	8RCG	8SCG	8TCG
59	8PCH	8QCH	8RCH	8SCH	8TCH
60	8PCI	8QCI	8RCI	8SCI	8TCI
61	8PCJ	8QCJ	8RCJ	8SCJ	8TCJ
62	8PCK	8QCK	8RCK	8SCK	8TCK
63	8PCL	8QCL	8RCL	8SCL	8TCL
64	8PCM	8QCM	8RCM	8SCM	8TCM
65	8PCN	8QCN	8RCN	8SCN	8TCN
66	8PCO		8RCO	8SCO	8TCO

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE IV. TABULATED CHARACTERISTICS TABLE (cont)

SUFFIX No.	8PAA (cont)	8QAA (cont)	8RAA (cont)	8SAA (cont)	8TAA (cont)
67	8PCP	8QCP	8RCP	8SCP	8TCP
68	8PCQ	8QCQ	8RCQ	8SCQ	8TCQ
69	8PCR	8QCR	8RCR	8SCR	8TCR
70	8PCS	8QCS	8RCS	8SCS	8TCS
71	8PCT	8QCT	8RCT	8SCT	8TCT
72	8PCU	8QCU	8RCU	8SCU	8TCU
73	8PCV	8QCV	8RCV	8SCV	8TCV
74	8PCW	8QCW	8RCW	8SCW	8TCW
75	8PCX	8QCX	8RCX	8SCX	8TCX
76	8PCY	8QCY	8RCY	8SCY	8TCY
77	8PCZ	8QCZ	8RCZ	8SCZ	8TCZ
78	8PDA	8QDA	8RDA	8SDA	8TDA
79	8PDB	8QDB	8RDB	8SDB	8TDB
80	8PDC	8QDC	8RDC	8SDC	8TDC
81	8PDD	8QDD	8RDD	8SDD	8TDD
82	8PDE	8QDE	8RDE	8SDE	8TDE
83	8PDF	8QDF	8RDF	8SDF	8TDF
84	8PDG	8QDG	8RDG	8SDG	8TDG
85	8PDH	8QDH	8RDH	8SDH	8TDH
86	8PDI	8QDI	8RDI	8SDI	8TDI
87	8PDJ	8QDJ	8RDJ	8SDJ	8TDJ
88	8PDK	8QDK	8RDK	8SDK	8TDK
89	8PDL	8QDL	8RDL	8SDL	8TDL
90	8PDM	8QDM	8RDM	8SDM	8TDM
91	8PDN	8QDN	8RDN	8SDN	8TDN
92	8PDO	8QDO	8RDO	8SDO	8TDO
93	8PDP	8QDP	8RDP	8SDP	8TDP
94	8PDQ	8QDQ	8RDQ	8SDQ	8TDQ
95	8PDR	8QDR	8RDR	8SDR	8TDR
96	8PDS	8QDS	8RDS	8SDS	8TDS
97	8PDT	8QDT	8RDT	8SDT	8TDT
98	8PDU	8QDU	8RDU	8SDU	8TDU
99	8PDV	8QDV	8RDV	8SDV	8TDV
100	8PDW	8QDW	8RDW	8SDW	8TDW

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE V. SOURCE TABLE

SUFFIX NO.	CAGE CODE	MANUFACTURER'S PART NUMBER
01	9AAB	9AAC
	9AAD	9AAE
	9AAF	9AAG
	9AAH	9AAI
	9AAJ	9AAK
	9AAL	9AAM
02	9ABB	9ABC
	9ABD	9ABE
	9ABF	9ABG
	9ABH	9ABI
	9ABJ	9ABK
	9ABL	9ABM
03	9ACB	9ACC
	9ACD	9ACE
	9ACF	9ACG
	9ACH	9ACI
	9ACJ	9ACK
	9ACL	9ACM
04	9ADB	9ADC
	9ADD	9ADE
	9ADF	9ADG
	9ADH	9ADI
	9ADJ	9ADK
	9ADL	9ADM
05	9AEB	9AEC
	9AED	9AEE
	9AEF	9AEG
	9AEH	9AEI
	9AEJ	9AEK
	9AEL	9AEM

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE V. SOURCE TABLE (cont)

SUFFIX NO.	CAGE CODE	MANUFACTURER'S PART NUMBER
06	9AFB	9AFC
	9AFD	9AFE
	9AFF	9AFG
	9AFH	9AFI
	9AFJ	9AFK
	9AFL	9AFM
07	9AGB	9AGC
	9AGD	9AGE
	9AGF	9AGG
	9AGH	9AGI
	9AGJ	9AGK
	9AGL	9AGM
08	9AHB	9AHC
	9AHD	9AHE
	9AHF	9AHG
	9AHH	9AHI
	9AHJ	9AHK
	9AHL	9AHM
09	9AIB	9AIC
	9AID	9AIE
	9AIF	9AIG
	9AIH	9AII
	9AIJ	9AIK
	9AIL	9AIM
10	9AJB	9AJC
	9AJD	9AJE
	9FJF	9AJG
	9AJH	9AJI
	9AJJ	9AJK
	9AJL	9AJM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE V. SOURCE TABLE (cont)

SUFFIX NO.	CAGE CODE	MANUFACTURER'S PART NUMBER
11	9AKB	9AKC
	9AKD	9AKE
	9AKF	9AKG
	9AKH	9AKI
	9AKJ	9AKK
	9AKL	9AKM
12	9ALB	9ALC
	9ALD	9ALE
	9ALF	9ALG
	9ALH	9ALI
	9ALJ	9ALK
	9ALL	9ALM
13	9AMB	9AMC
	9AMD	9AME
	9AMF	9AMG
	9AMH	9AMI
	9AMJ	9AMK
	9AML	9AMM
14	9ANB	9ANC
	9AND	9ANE
	9ANF	9ANG
	9ANH	9ANI
	9ANJ	9ANK
	9ANL	9ANM
15	9AOB	9AOC
	9AOD	9AOE
	9AOF	9AOG
	9AOH	9AOI
	9AOJ	9AOK
	9AOL	9AOM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE V. SOURCE TABLE (cont)

SUFFIX NO.	CAGE CODE	MANUFACTURER'S PART NUMBER
15	9APB	9APC
	9APD	9APE
	9APF	9APG
	9APH	9API
	9APJ	9APK
	9APL	9APM
	9AQB	9AQC
	9AQD	9AQE
	9AQF	9AQG
	9AQH	9AQI
	9AQJ	9AQK
	9AQL	9AQM
18	9ARB	9ARC
	9ARD	9ARE
	9ARF	9ARG
	9ARH	9ARI
	9ARJ	9ARK
	9ARL	9ARM
	9ASB	9ASC
	9ASD	9ASE
	9ASF	9ASG
	9ASH	9ASI
	9ASJ	9ASK
	9ASL	9ASM
20	9ATB	9ATC
	9ATD	9ATE
	9ATF	9ATG
	9ATH	9ATI
	9ATJ	9ATK
	9ATL	9ATM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE V. SOURCE TABLE (cont)

SUFFIX NO.	CAGE CODE	MANUFACTURER'S PART NUMBER
21	9AUB	9AUC
	9AUD	9AUE
	9AUF	9AUG
	9AUH	9AUI
	9AUJ	9AUK
	9AUL	9AUM
22	9AVB	9AVC
	9AVD	9AVE
	9AVF	9AVG
	9AVH	9AVI
	9AVJ	9AVK
	9AVL	9AVM
23	9AWB	9AWC
	9AWD	9AWE
	9AWF	9AWG
	9AWH	9AWI
	9AWJ	9AWK
	9AWL	9AWM
24	9AXB	9AXC
	9AXD	9AXE
	9AXF	9AXG
	9AXH	9AXI
	9AXJ	9AXK
	9AXL	9AXM
25	9AYB	9AYC
	9AYD	9AYE
	9AYF	9AYG
	9AYH	9AYI
	9AYJ	9AYK
	9AYL	9AYM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE V. SOURCE TABLE (cont)

SUFFIX NO.	CAGE CODE	MANUFACTURER'S PART NUMBER
26	9AZB	9AZC
	9AZD	9AZE
	9AZF	9AZG
	9AZH	9AZI
	9AZJ	9AZK
	9AZL	9AZM
27	9BAB	9BAC
	9BAD	9BAE
	9BAF	9BAG
	9BAH	9BAI
	9BAJ	9BAK
	9BAL	9BAM
28	9BBB	9BBC
	9BBD	9BBE
	9BBF	9BBG
	9BBH	9BBI
	9BBJ	9BBK
	9BBL	9BBM
29	9BCB	9BCC
	9BCD	9BCE
	9BCF	9BCG
	9BCH	9BCI
	9BCJ	9BCK
	9BCL	9BCM
30	9BDB	9BDC
	9BDD	9BDE
	9BDF	9BDG
	9BDH	9BDI
	9BDJ	9BDK
	9BDL	9BDM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE V. SOURCE TABLE (cont)

SUFFIX NO.	CAGE CODE	MANUFACTURER'S PART NUMBER
31	9BEB	9BEC
	9BED	9BEE
	9BEF	9BEG
	9BEH	9BEI
	9BEJ	9BEK
	9BEL	9BEM
32	9BFB	9BFC
	9BFD	9BFE
	9BFF	9BFG
	9BFH	9BFI
	9BFJ	9BFK
	9BFL	9BFM
33	9BGB	9BGC
	9BGD	9BGE
	9BGF	9BGG
	9BGH	9BGI
	9BGJ	9BGK
	9BGL	9BGM
34	9BHB	9BHC
	9BHD	9BHE
	9BHF	9BHG
	9BHH	9BHI
	9BHJ	9BHK
	9BHL	9BHM
35	9BIB	9BIC
	9BID	9BIE
	9BIF	9BIG
	9BIH	9BII
	9BIJ	9BIK
	9BIL	9BIM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE V. SOURCE TABLE (cont)

SUFFIX NO.	CAGE CODE	MANUFACTURER'S PART NUMBER
36	9BJB	9BJC
	9BJD	9BJE
	9BJF	9BJG
	9BJH	9BJI
	9BJJ	9BJK
	9BJL	9BJM
37	9BKB	9BKC
	9BKD	9BKE
	9BKF	9BKG
	9BKH	9BKI
	9BKJ	9BKK
	9BKL	9BKM
38	9BLB	9BLC
	9BLD	9BLE
	9BLF	9BLG
	9BLH	9BLI
	9BLJ	9BLK
	9BLL	9BLM
39	9BMB	9BMC
	9BMD	9BME
	9BMF	9BMG
	9BMH	9BMI
	9BMJ	9BMK
	9BML	9BMM
40	9BNB	9BNC
	9BND	9BNE
	9BNF	9BNG
	9BNH	9BNI
	9BNJ	9BNK
	9BNL	9BNM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE V. SOURCE TABLE (cont)

SUFFIX NO.	CAGE CODE	MANUFACTURER'S PART NUMBER
41	9BOB	9BOC
	9BOD	9BOE
	9BOF	9BOG
	9BOH	9BOI
	9BOJ	9BOK
	9BOL	9BOM
42	9BPB	9BPC
	9BPD	9BPE
	9BPF	9BPG
	9BPH	9BPI
	9BPJ	9BPK
	9BPL	9BPM
43	9BQB	9BQC
	9BQD	9BQE
	9BQF	9BQG
	9BQH	9BQI
	9BQJ	9BQK
	9BQL	9BQM
44	9BRB	9BRC
	9BRD	9BRE
	9BRF	9BRG
	9BRH	9BRI
	9BRJ	9BRK
	9BRL	9BRM
45	9BSB	9BSC
	9BSD	9BSE
	9BSF	9BSG
	9BSH	9BSI
	9BSJ	9BSK
	9BSL	9BSM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE V. SOURCE TABLE (cont)

SUFFIX NO.	CAGE CODE	MANUFACTURER'S PART NUMBER
46	9BTB	9BTC
	9BTD	9BTE
	9BTF	9BTG
	9BTH	9BTI
	9BTJ	9BTK
	9BTL	9BTM
47	9BUB	9BUC
	9BUD	9BUE
	9BUF	9BUG
	9BUH	9BUI
	9BUJ	9BUK
	9BUL	9BUM
48	9BVB	9BVC
	9BVD	9BVE
	9BVF	9BVG
	9BVH	9BVI
	9BVJ	9BVK
	9BVL	9BVM
49	9BWB	9BWC
	9BWD	9BWE
	9BWF	9BWG
	9BWH	9BWI
	9BWJ	9BWK
	9BWL	9BWM
50	9BXB	9BXC
	9BXD	9BXE
	9BXF	9BXG
	9BXH	9BXI
	9BXJ	9BXK
	9BXL	9BXM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE V. SOURCE TABLE (cont)

SUFFIX NO.	CAGE CODE	MANUFACTURER'S PART NUMBER
51	9BYB	9BYC
	9BYD	9BYE
	9BYF	9BYG
	9BYH	9BYI
	9BYJ	9BYK
	9BYL	9BYM
52	9BZB	9BZC
	9BZD	9BZE
	9BZF	9BZG
	9BZH	9BZI
	9BZJ	9BZK
	9BZL	9BZM
53	9CAB	9CAC
	9CAD	
	9CAF	9CAG
	9CAH	9CAI
		9CAK
	9CAL	9CAM
54	9CBB	9CBC
	9CBD	9CBE
	9CBF	9CBG
	9CBH	9CBI
	9CBJ	9CBK
	9CBL	
55	9CCB	9CCC
	9CCD	9CCE
	9CCF	9CCG
	9CCH	9CCI
	9CCJ	9CCK
	9CCL	9CCM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE V. SOURCE TABLE (cont)

SUFFIX NO.	CAGE CODE	MANUFACTURER'S PART NUMBER
56	9CDB	9CDC
	9CDD	9CDE
	9CDF	9CDG
	9CDH	9CDI
	9CDJ	9CDK
	9CDL	9CDM
57	9CEB	9CEC
	9CED	9CEE
	9CEF	9CEG
	9CEH	9CEI
	9CEJ	9CEK
	9CEL	9CEM
58	9CFB	9CFC
	9CFD	9CFE
	9CFF	9CFG
	9CFH	9CFI
	9CFJ	9CFK
	9CFL	9CFM
59	9CGB	9CGC
	9CGD	9CGE
	9CGF	9CGG
	9CGH	9CGI
	9CGJ	9CGK
	9CGL	9CGM
60	9CHB	9CHC
	9CHD	9CHE
	9CHF	9CHG
	9CHH	9CHI
	9CHJ	9CHK
	9CHL	9CHM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE V. SOURCE TABLE (cont)

SUFFIX NO.	CAGE CODE	MANUFACTURER'S PART NUMBER
51	9CIB	9CIC
	9CID	9CIE
	9CIF	9CIG
	9CIH	9CII
	9CIJ	9CIK
	9CIL	9CIM
62	9CJB	9CJC
	9CJD	9CJE
	9CJF	9CJG
	9CJH	9CJI
	9CJJ	9CJK
	9CJL	9CJM
63	9CKB	9CKC
	9CKD	9CKE
	9CKF	9CKG
	9CKH	9CKI
	9CKJ	9CKK
	9CKL	9CKM
64	9CLB	9CLC
	9CLD	9CLE
	9CLF	9CLG
	9CLH	9CLI
	9CLJ	9CLK
	9CLL	9CLM
65	9CMB	9CMC
	9CMD	9CME
	9CMF	9CMG
	9CMH	9CMI
	9CMJ	9CMK
	9CML	9CMM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE V. SOURCE TABLE (cont)

SUFFIX No.	CAGE CODE	MANUFACTURER'S PART NUMBER
66	9CNB	9CNC
	9CND	9CNE
	9CNF	9CNG
	9CNW	9CNI
	9CNJ	9CNK
	9CNL	9CNM
67	9COB	9COC
	9COD	9COE
	9COF	9COG
	9COH	9COI
	9COJ	9COK
	9COL	9COM
68	9CPB	9CPC
	9CPD	9CPE
	9CPF	9CPG
	9CPH	9CPI
	9CPJ	9CPK
	9CPL	9CPM
69	9CQB	9CQC
	9CQD	9CQE
	9CQF	9CQG
	9CQH	9CQI
	9CQJ	9CQK
	9CQL	9CQM
70	9CRB	9CRC
	9CRD	9CRE
	9CRF	9CRG
	9CRH	9CRI
	9CRJ	9CRK
	9CRL	9CRM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE V. SOURCE TABLE (cont)

SUFFIX NO.	CAGE CODE	MANUFACTURER'S PART NUMBER
71	9CSB	9CSC
	9CSD	9CSE
	9CSF	9CSG
	9CSH	9CSI
	9CSJ	9CSK
	9CSL	9CSM
72	9CTB	9CTC
	9CTD	9CTE
	9CTF	9CTG
	9CTH	9CTI
	9CTJ	9CTK
	9CTL	9CTM
73	9CUB	9CUC
	9CUD	9CUE
	9CUF	9CUG
	9CUH	9CUI
	9CUJ	9CUK
	9CUL	9CUM
74	9CVB	9CVC
	9CVD	9CVE
	9CVF	9CVG
	9CVH	9CVI
	9CVJ	9CVK
	9CVL	9CVM
75	9CWB	9CWC
	9CWD	9CWE
	9CWF	9CWG
	9CWH	9CWI
	9CWJ	9CWK
	9CWL	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE V. SOURCE TABLE (cont)

SUFFIX NO.	CAGE CODE	MANUFACTURER'S PART NUMBER
76	9CXB	9CXC
	9CXD	9CXE
	9CXF	9CXG
	9CXH	9CXI
	9CXJ	9CXK
	9CXL	9CXM
77	9CYB	9CYC
	9CYD	9CYE
	9CYF	9CYG
	9CYH	9CYI
	9CYJ	9CYK
	9CYL	9CYM
78	9CZB	9CZC
	9CZD	9CZE
	9CZF	9CZG
	9CZH	9CZI
	9CZJ	9CZK
	9CZL	9CZM
79	9DAB	9DAC
	9DAD	9DAE
	9DAF	9DAG
	9DAH	9DAI
	9DAJ	9DAK
	9DAL	9DAM
80	9DBB	9DBC
	9DBD	9DBE
	9DBF	9DBG
	9DBH	9DBI
	9DBJ	9DBK
	9DBL	9DBM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE V. SOURCE TABLE (cont)

SUFFIX NO.	CAGE CODE	MANUFACTURER'S PART NUMBER
81	9DCB	9DCC
	9DCD	9DCE
	9DCF	9DCG
	9DCH	9DCI
	9DCJ	9DCK
	9DCL	9DCM
82	9DDB	9DDC
	9DDD	9DDE
	9DDF	9DDG
	9DDH	9DDI
	9DDJ	9DDK
	9DDL	9DDM
83	9DEB	9DEC
	9DED	9DEE
	9DEF	9DEG
	9DEH	9DEI
	9DEJ	9DEK
	9DEL	9DEM
84	9DFB	9DFC
	9DFD	9DFE
	9DFF	9DFG
	9DFH	9DFI
	9DFJ	9DFK
	9DFL	9DFM
85	9DGB	9DGC
	9DGD	9DGE
	9DGF	9DGG
	9DGH	9DGI
	9DGJ	9DGK
	9DGL	9DGM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE V. SOURCE TABLE (cont)

SUFFIX NO.	CAGE CODE	MANUFACTURER'S PART NUMBER
86	9DHB	9DHC
	9DHD	9DHE
	9DHF	9DHG
	9DHH	9DHI
	9DHJ	9DHK
	9DHL	9DHM
87	9DIB	9DIC
	9DID	9DIE
	9DIF	9DIG
	9DIH	9DII
	9DIJ	9DIK
	9DIL	9DIM
88	9DJB	9DJC
	9DJD	9DJE
	9DJF	9DJG
	9DJH	9DJI
	9DJJ	9DJK
	9DJL	9DJM
89	9DKB	9DKC
	9DKD	9DKE
	9DKF	9DKG
	9DKH	9DKI
	9DKJ	9DKK
	9DKL	9DKM
90	9DLB	9DLC
	9DLD	9DLE
	9DLF	9DLG
	9DLH	9DLI
	9DLJ	9DLK
	9DLL	9DLM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE V. SOURCE TABLE (cont)

SUFFIX NO.	CAGE CODE	MANUFACTURER'S PART NUMBER
91	9DMB	9DMC
	9DMD	9DME
	9DMF	9DMG
	9DMH	9DMI
	9DMJ	9DMK
	9DML	9DMM
92	9DNB	9DNC
	9DND	9DNE
	9DNF	9DNG
	9DNH	9DNI
	9DNJ	9DNK
	9DNL	9DNM
93	9DOB	9DOC
	9DOD	9DOE
	9DOF	9DOG
	9DOH	9DOI
	9DOJ	9DOK
	9DOL	9DOM
94	9DPB	9DPC
	9DPD	9DPE
	9DPF	9DPG
	9DPH	9DPI
	9DPJ	9DPK
	9DPL	9DPM
95	9DQB	9DQC
	9DQD	9DQE
	9DQF	9DOG
	9DQH	9DQI
	9DQJ	9DQK
	9DQL	9DQM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE V. SOURCE TABLE (cont)

SUFFIX NO.	CAGE CODE	MANUFACTURER'S PART NUMBER
96	9DRB	9DRC
	9DRD	9DRE
	9DRF	9DRG
	9DRH	9DRI
	9DRJ	9DRK
	9DRL	9DRM
97	9DSB	9DSC
	9DSD	9DSE
	9DSF	9DSG
	9DSH	9DSI
	9DSJ	9DSK
	9DSL	9DSM
98	9DTB	9DTC
	9DTD	9DTE
	9DTF	9DTG
	9DTH	9DTI
	9DTJ	9DTK
	9DTL	9DTM
99	9DUB	9DUC
	9DUD	9DUE
	9DUF	9DUG
	9DUH	9DUI
	9DUJ	9DUK
	9DUL	9DUM
100	9DVB	9DVC
	9DVD	9DVE
	9DVF	9DVG
	9DVH	9DVI
	9DVJ	9DVK
	9DVL	9DVM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE VI. MATERIAL TABLE

REF NO.	COMPONENT NAME	MATERIAL NAME	SPECIFICATION NUMBER
01	5080	5081	5082
02	5090	5091	5092
03	5100	5101	5102
04	5110	5111	5112
05	5120	5121	5122
06	5130	5131	5132
07	5140	5141	5142
08	5150	5151	5152
09	5160	5161	5162
10	5170	5171	5172
11	5180	5181	5182
12	5190	5191	5192

MATERIAL TABLE (cont)

REF NO.	ALLOY NUMBER	COND. OR TEMPER	FORM OR SHAPE	CLASS	GRADE	TYPE	COMPOSITION
01	5083	5084	5085	5086	5087	5088	5089
02	5093	5094	5095	5096	5097	5098	5099
03	5103	5104	5105	5106	5107	5108	5109
04	5113	5114	5115	5116	5117	5118	5119
05	5123	5124	5125	5126	5127	5128	5129
06	5133	5134	5135	5136	5137	5138	5139
07	5143	5144	5145	5146	5147	5148	5149
08	5153	5154	5155	5156	5157	5158	5159
09	5163	5164	5165	5166	5167	5168	5169
10	5173	5174	5175	5176	5177	5178	5179
11	5183	5184	5185	5186	5187	5188	5189
12	5193	5194	5195	5196	5197	5198	5199

NOTE A. 5026
NOTE B. 5027
NOTE C. 5028
NOTE D. 5029
NOTE E. 5030

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE VII. FINISH TABLE

REF NO.	COMPONENT NAME	COMPONENT SURFACE	FINISH NAME	FED-STD-595 NO. OR THE COLOR NAME
01	4541	4542	4543	4549
02	4551	4552	4553	4558
03	4561	4562	4563	4568
04	4571	4572	4573	4578
05	4581	4582	4583	4588
06	4591	4592	4593	4598
07	4601	4602	4603	4608
08	4611	4612	4613	4618
09	4621	4622	4623	4628
10	4631	4632	4633	4638
11	4641	4642	4643	4648
12	4651	4652	4653	4658

FINISH TABLE (cont)

REF NO.	SPEC NUMBER	TYPE	CLASS	GRADE	THICKNESS MIN	
01	4544	4546	4545	4547	4550	4549
02	4554	4556	4555	4557	4560	4559
03	4564	4566	4565	4567	4570	4569
04	4574	4576	4575	4577	4580	4579
05	4584	4586	4585	4587	4590	4589
06	4594	4596	4595	4597	4600	4599
07	4604	4606	4605	4607	4610	4609
08	4614	“4616	4615	4617	4620	4619
09	4624	4626	4625	4627	4630	4629
10	4634	4636	4635	4637	4640	4639
11	4644	4646	4615	4647	4650	4649
12	4654	4656	4655	4657	4660	4659

NOTE A. 5021
NOTE B. 5022
NOTE C. 5023
NOTE D. 5024
NOTE E. 5025

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE VIII. MOUNTING HARDWARE TABLE

ITEM	PART NUMBER	TYPE	SIZE	LENGTH/ THICKNESS	QUAN PER UNIT
SCREW	6615	6616	6617	6618	6619
SCREW	6620	6621	6622	6623	6624
WASHER	6625	6626	6627	6628	6629
WASHER	6630	6631	6632	6633	6634
LOCKWASHER	6635	6636	6637	6638	6639
NUT	6640	6641	6642	6643	6644
NUT	6645	6646	6647	6648	6649
CLAMP	6650	6651	6652	6653	6654
STUD	6655	6656	6657	6658	6659
RETAINING RING	6660	6661	6662	6663	6664
6665	6666	6667	6668	6669	6670
6671	6672	6673	6674	6675	6676
6677	6678	6679	6680	6681	6682
6683	6684	6685	6686	6687	6688
6689	6690	6691	6692	6693	6694

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE IX. INGREDIENT TABLE

INGREDIENT	QUANTITY	UNITS
6715	6716	6717
6718	6719	6720
6721	6722	6723
6724	6725	6726
6727	6728	6729
6730	6731	6732
6733	6734	6735
6736	6737	6738
6739	6740	6741
6742	6743	6744
6745	6746	6747
6748	6749	6750
6751	6752	6753
6754	6755	6756

NOTE A. 6757
NOTE B. 6758
NOTE C. 6759
NOTE D. 6760
NOTE E. 6761
NOTE F. 6762
NOTE G. 6763
NOTE H. 6764

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE X. PERFORMANCE CHARACTERISTICS TABLE

COL. 1	COL. 2	COL. 3	COL. 4	COL. 5
6410	6411	6412	6413	6414
6415	6416	6417	6418	6419
6420	6421	6422	6423	6424
6425	6426	6427	6428	6429
6430	6431	6432	643.3	6434
6435	6436	6437	6438	6439
6440	6441	6442	6443	6444
6445	6446	6447	6448	6449
6450	6451	6452	6453	6454
6455	6456	6457	6458	6459
6460	6461	6462	6463	6464
6465	6466	6467	6468	6469
6470	6471	6472	6473	6474
6475	6476	647?	6478	6479

NOTE A. 6480
NOTE B. 6481
NOTE C. 6482
NOTE D. 6483
NOTE E. 6484
NOTE F. 6485
NOTE G. 6486
NOTE H. 6487
NOTE I. 6488
NOTE J. 6489
NOTE K. 6490
NOTE L. 6491
NOTE M. 6492
NOTE N. 6493
NOTE O. 6494
NOTE P. 6495
NOTE Q. 6496
NOTE R. 6497
NOTE S. 6498
NOTE T. 6499

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE XI. MODIFICATION TO QUALIFICATION INSPECTION TABLE

TEST TITLE	NATURE OF MODIFICATION	TITLE OF PRECEDING TEST
6875	6876	6877
6878	6879	6880
6881	6882	6883
6884	6885	6886
6887	6888	6889
6890	6891	6892
6893	6894	6895
6896	6897	6898
6899	6900	6901
6902	6903	6904
6905	6906	6907
6908	6909	6910
6911	6912	6913
6914	6915	6916
6917	6918	6919

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE XII. QUALIFICATION INSPECTION TABLE

TEST	TITLE
7351	
7352	
7353	
7354	
7355	
7356	
7357	
7358	
7359	
7360	
7361	
7362	
7363	
7364	
7365	
7366	
7367	
7368	
7369	
7370	
7371	
7372	
7373	
7374	
7375	
7376	
7377	
7378	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE XIII. MODIFICATION TO FIRST ARTICLE INSPECTION TABLE

TEST TITLE	MODIFICATION	PRECEDING TEST
7920	7921	7922
7923	7924	7925
7926	7927	7928
7929	7930	7931
7932	7933	7934
7935	7936	7937
7938	7939	7940
7941	7942	7943
7944	7945	7946
7947	7948	7949
7950	7951	7952
7953	7954	7955
7956	7957	7958
7959	7960	7961
7962	7963	7964

NOTE: TEST TITLES USED IN THIS TABLE REFER TO TITLES FOUND IN THE QUALIFICATION TABLE OF THE BASE DOCUMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE XIV. MODIFICATION TO FIRST ARTICLE INSPECTION TABLE

TEST TITLE	NATURE OF MODIFICATION	TITLE OF PRECEDING TEST
5301	5302	5303
5304	5305	5306
5307	5308	5309
5310	5311	5312
5313	5314	5315
5316	5317	5318
5319	5320	5321
5322	5323	5324
5325	5326	5327
5328	5329	5330
5331	5332	5333
5334	5335	5336
5337	5338	5339
5340	5341	5342
5343	5344	5345

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE XV. FIRST ARTICLE INSPECION TABLE

| | | |

APPENDIX B

TABLE XVI. MODIFICATION TO GROUP A INSPECTION TABLE

TEST TITLE	NATURE OF MODIFICATION	TITLE OF PRECEDING TEST
5801	5802	5803
5804	5805	5806
5807	5808	5809
5810	5811	5812
5813	5814	5815
5816	5817	5818
5819	5820	5821
5822	5823	5824
5825	5826	5827
5828	5829	5830
5831	5832	5833
5834	5835	5836
5837	5838	5839
5840	5841	5842
5843	5844	5845

L

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE XVII. GROUP A INSPECTION TABLE

	TEST TITLE
5426	
5427	
5428	
5429	
5430	
5431	
5432	
5433	
5434	
5435	
5436	
5437	
5438	
5439	
5440	
5441	
5442	
5443	
5445	
5446	
5447	
5448	
5449	
5450	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE XVII. GROUP A INSPECTION TABLE (cont)

| TEST | TITLE | | |

APPENDIX B

TABLE XVIII. MODIFICATION TO GROUP B INSPECTION TABLE

TEST TITLE	NATURE OF MODIFICATION	TITLE OF PRECEDING TEST
5846	5847	5848
5849	5850	5851
5852	5853	5854
5855	5856	5857
5858	5859	5860
5861	5862	5863
5864	5865	5866
5867	5868	5869
5870	5871	5872
5873	5874	5875
5876	5877	5878
5879	5880	5881
5882	5883	5884
5885	5886	5887
5888	5889	5890

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE XIX. GROUP B INSPECTION TABLE

	TEST TITLE
5526	
5527	
5528	
5529	
5530	
5531	
5532	
5533	
5534	
5535	
5536	
5537	
5538	
5539	
5540	
5541	
5542	
5543	
5544	
5545	
5546	
5547	
5548	
5549	
5550	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE XX. MODIFICATION TO GROUP C INSPECTION TABLE

TEST TITLE	NATURE OF MODIFICATION	TITLE OF PRECEDING TEST
5891	5892	5893
5894	5895	5896
5897	5898	5899
5900	5901	5902
5903	5904	5905
5906	5907	5908
5909	5910	5911
5912	5913	5914
5915	5916	5917
5918	5919	5920
5921	5922	5923
5924	5925	5926
5927	5928	5929
5930	5931	5932
5933	5934	5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE XXI. GROUP C INSPECTION TABLE

TITLE
5626
5627
5628
5629
5630
5631
5632
5633
5634
5635
5636
5637
5638
5639
5640
5641
5642
5643
5644
5645
5646
5647
5648
5649
5650

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE XXII. MODIFICATION TO GROUP INSPECTION TABLE

TEST TITLE	NAT01URE OF MODIFICATION	TITLE OF PRECEDING TEST
5936	5937	5938
5939	5940	5941
5942	5943	5944
5945	5946	5947
5948	5949	5950
5951	5952	5953
5954	5955	5956
5957	5958	5959
5960	5961	5962
5963	5964	5965
5966	5967	5968
5969	5970	5971
5972	5973	5974
5975	5976	5977
5978	5979	5980

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE XXIII. GROUP D INSPECTION TABLE

TEST	TITLE
5726	
5727	
5728	
5729	
5730	
5731	
5732	
5733	
5734	
5735	
5736	
5737	
5738	
5739	
5740	
5741	
5742	
5743	
5744	
5745	
5746	
5747	
5748	
5749	
5750	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE XXIV. 100 PERCENT INSPECTION TABLE

TEST TITLE
6379
6380
6381
6382
6383
6384
6385
6386
6387
6388
6389
6390
6391
6392
6393
6394
6395
6396
6397
6398
6399
6400
6401
6402
6403
6404
6405
6406
6407
6408

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE XXIV. 100 PERCENT INSPECTION TABLE (cont)

TEST TITLE
7886
7887
7888
7889
7890
7891
7892
7893
7894
7895
7896
7897
7898
7899
7900
7901
7902
7903
7904
7905

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE XXV. SUPERSEDED DOCUMENT TABLE

SUPERSEDED DOCUMENT NUMBER	DOCUMENT DATE
6871	6872
6980	6981
6982	6983
6986	6987
6988	6989

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE XXVI. PART NUMBER CROSS REFERENCE TABLE

NEW PART NUMBER	SUPERSEDED PART NUMBER(S)
6501	6502
6503	6504
6505	6506
6507	6508
6509	6510
6511	6512
6513	6514
6515	6516
6517	6518
6519	6520
6521	6522
6523	6524
6525	6526
6527	6528
6529	6530
6531	6532
6533	6534
6535	6536
6537	6538
6539	6540
6541	6542
6543	6544
6545	6546
6547	6548
6549	6550

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE XXVI. PART NUMBER CROSS REFERENCE TABLE (cont)

NEW PART NUMBER	SUPERSEDED PART NUMBER(S)
6551	6552
6553	6554
6555	6556
6557	6558
6559	6560
6561	6562
6563	6564
6565	6566
6567	6568
6569	6570
6571	6572
6573	6574
6575	6576
6577	6578
6579	6580
6581	6582
6583	6584
6585	6586
6587	6588
6589	6590
6591	6592
6593	6594
6595	6596
6597	6598
6599	6600

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

TABLE XXVII. NOMENCLATURE TABLE

NOMENCLATURE USED IN BASE DOCUMENT	NOMENCLATURE USED IN MSE
5460	**5560**
5461	**5561**
5462	**5562**
5463	**5563**
5464	**5564**
5465	**5565**
5466	**5566**
5467	**5567**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

THIS PAGE WAS INTENTIONALLY LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX C

SIX-SECTION MSE


10. GENERAL.

10.1 SCOPE. This Appendix illustrates a SRS and the six-section MSE that is computer generated using the SRS codes and values. This Appendix is not a mandatory part of the standard. The information contained herein is intended for guidance only.


20. APPLICABLE DOCUMENTS.

This section is not applicable to this Appendix.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

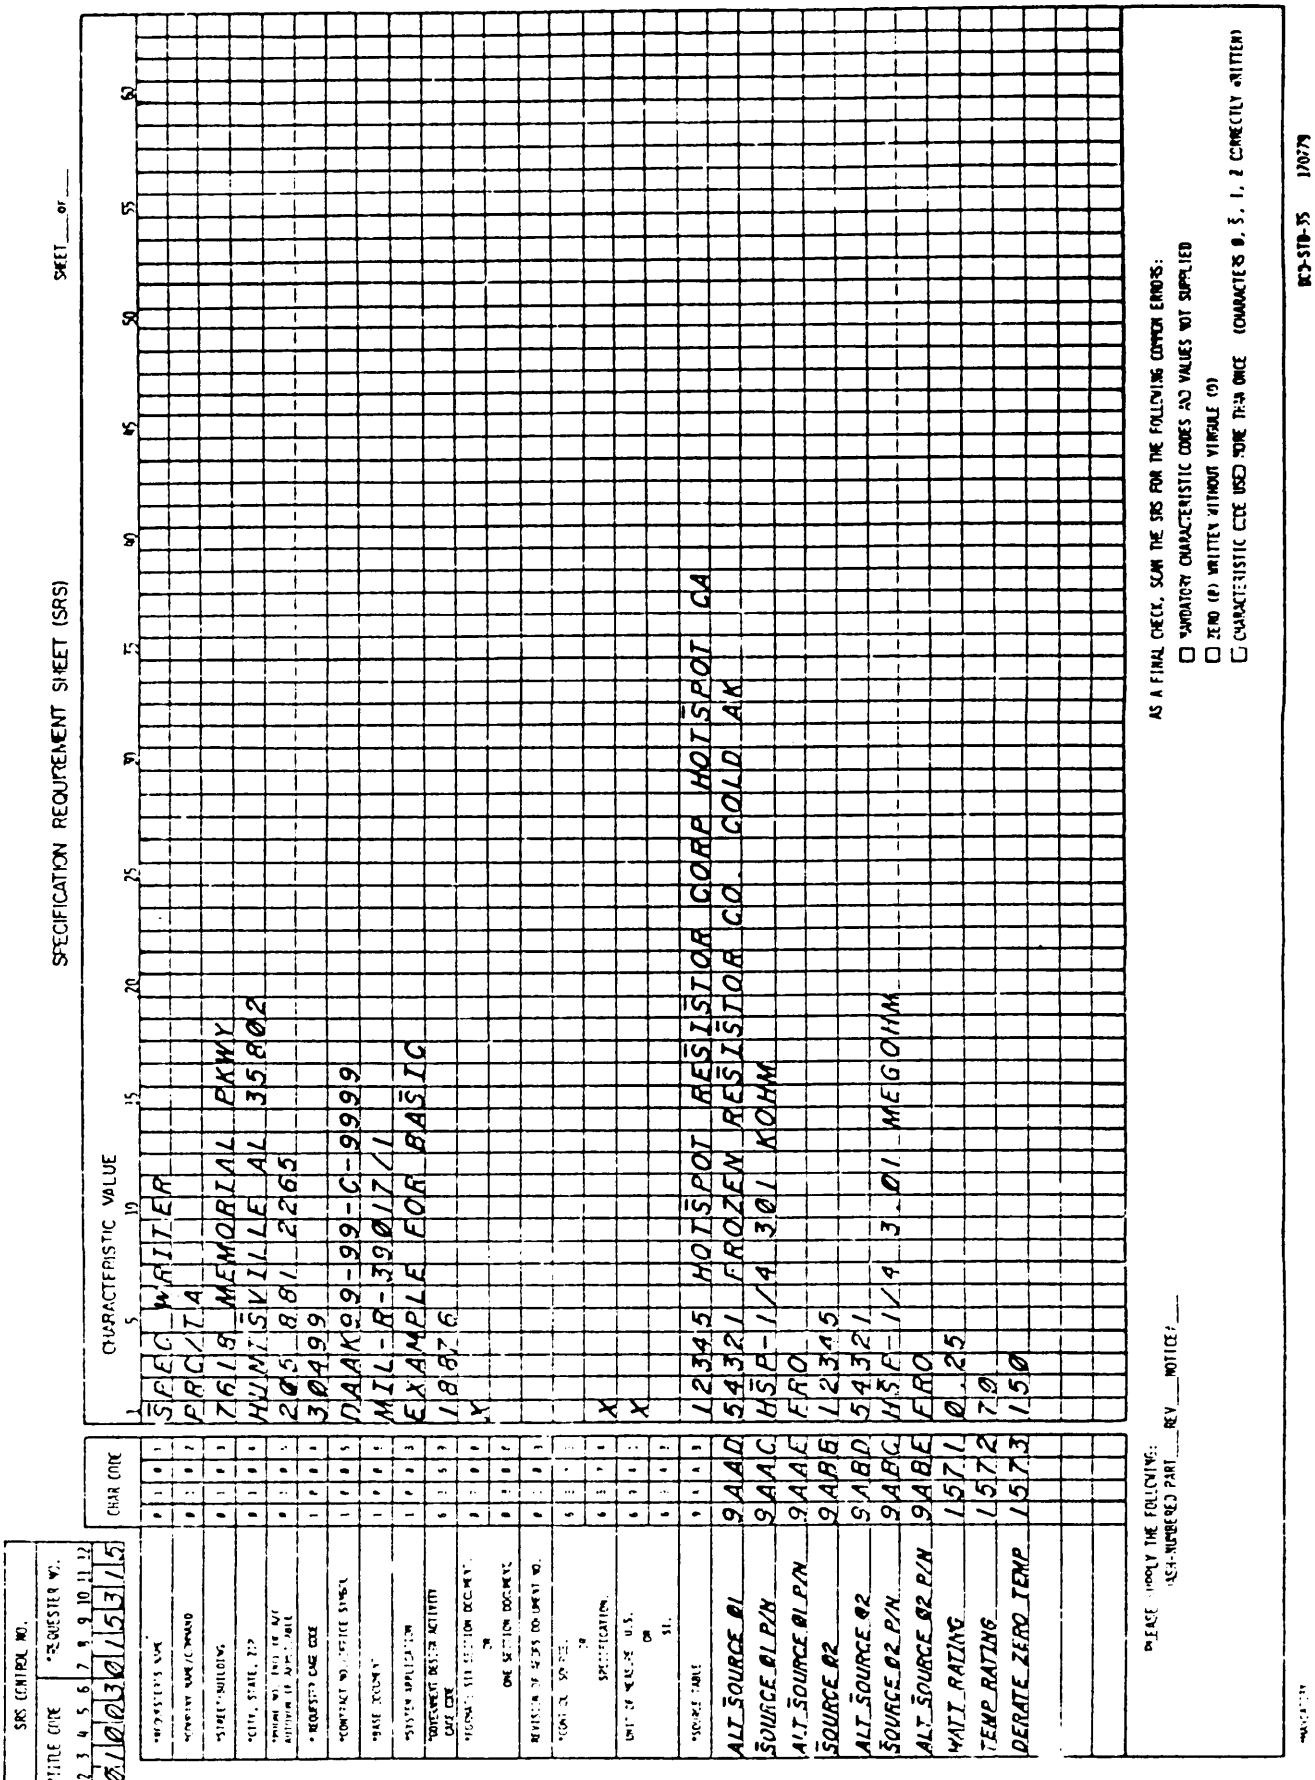


Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

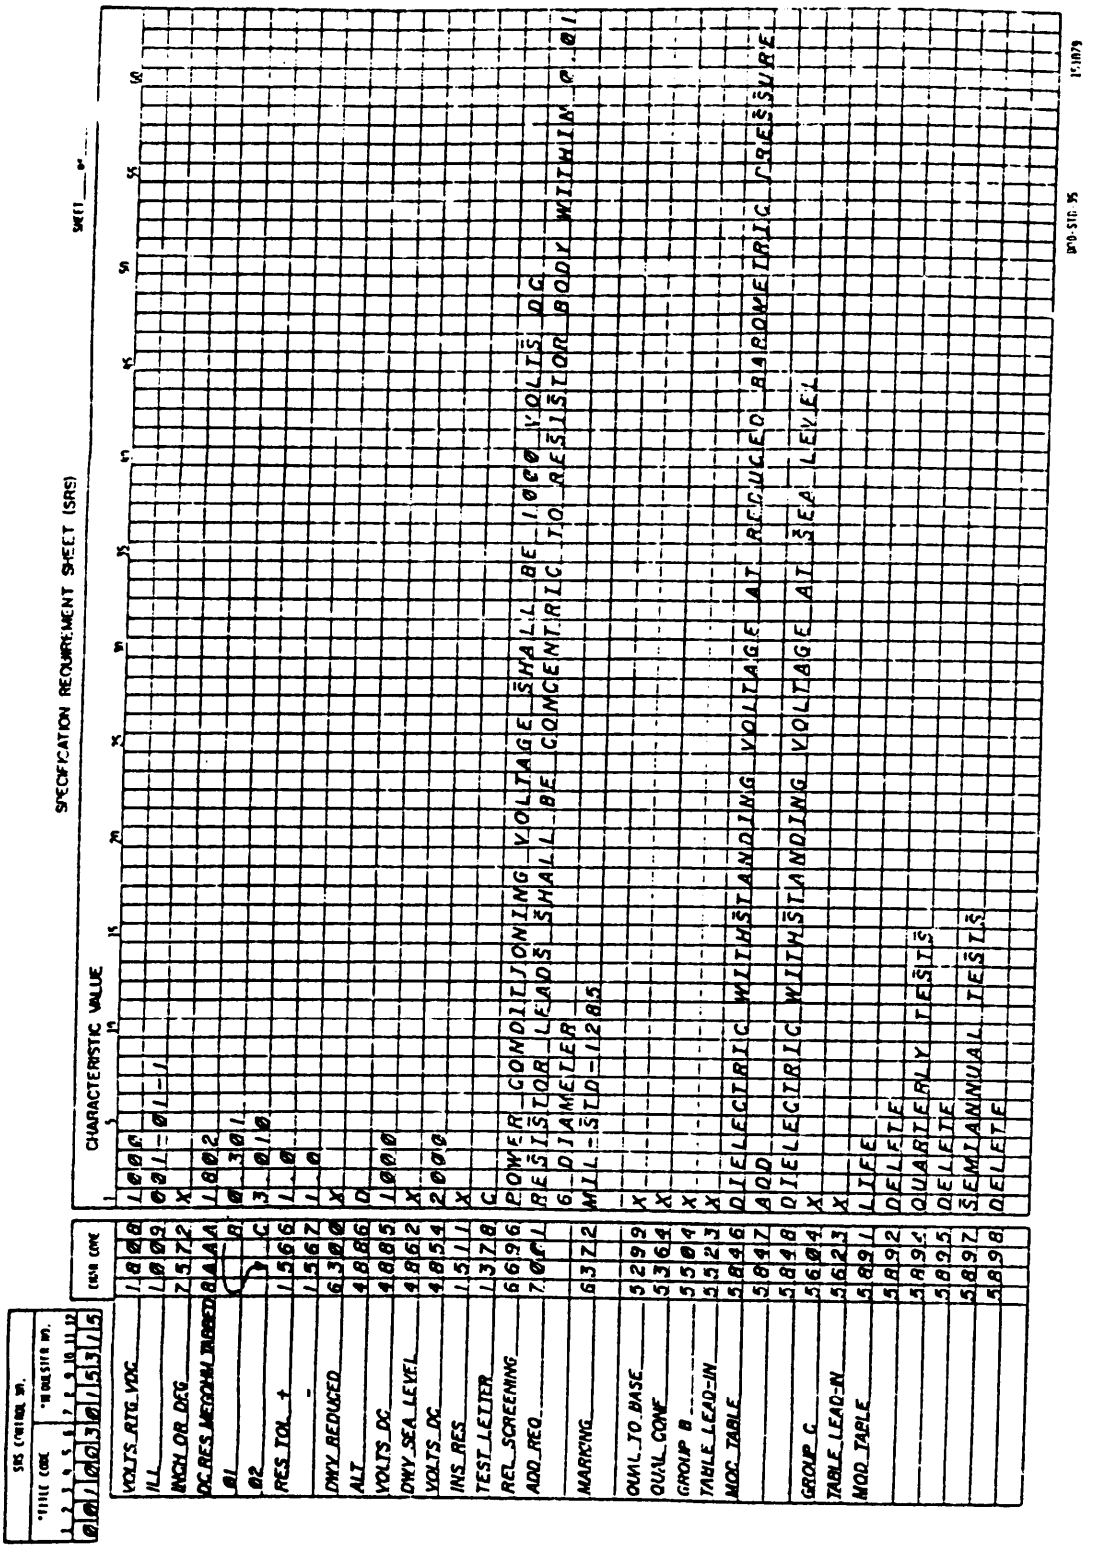

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX C

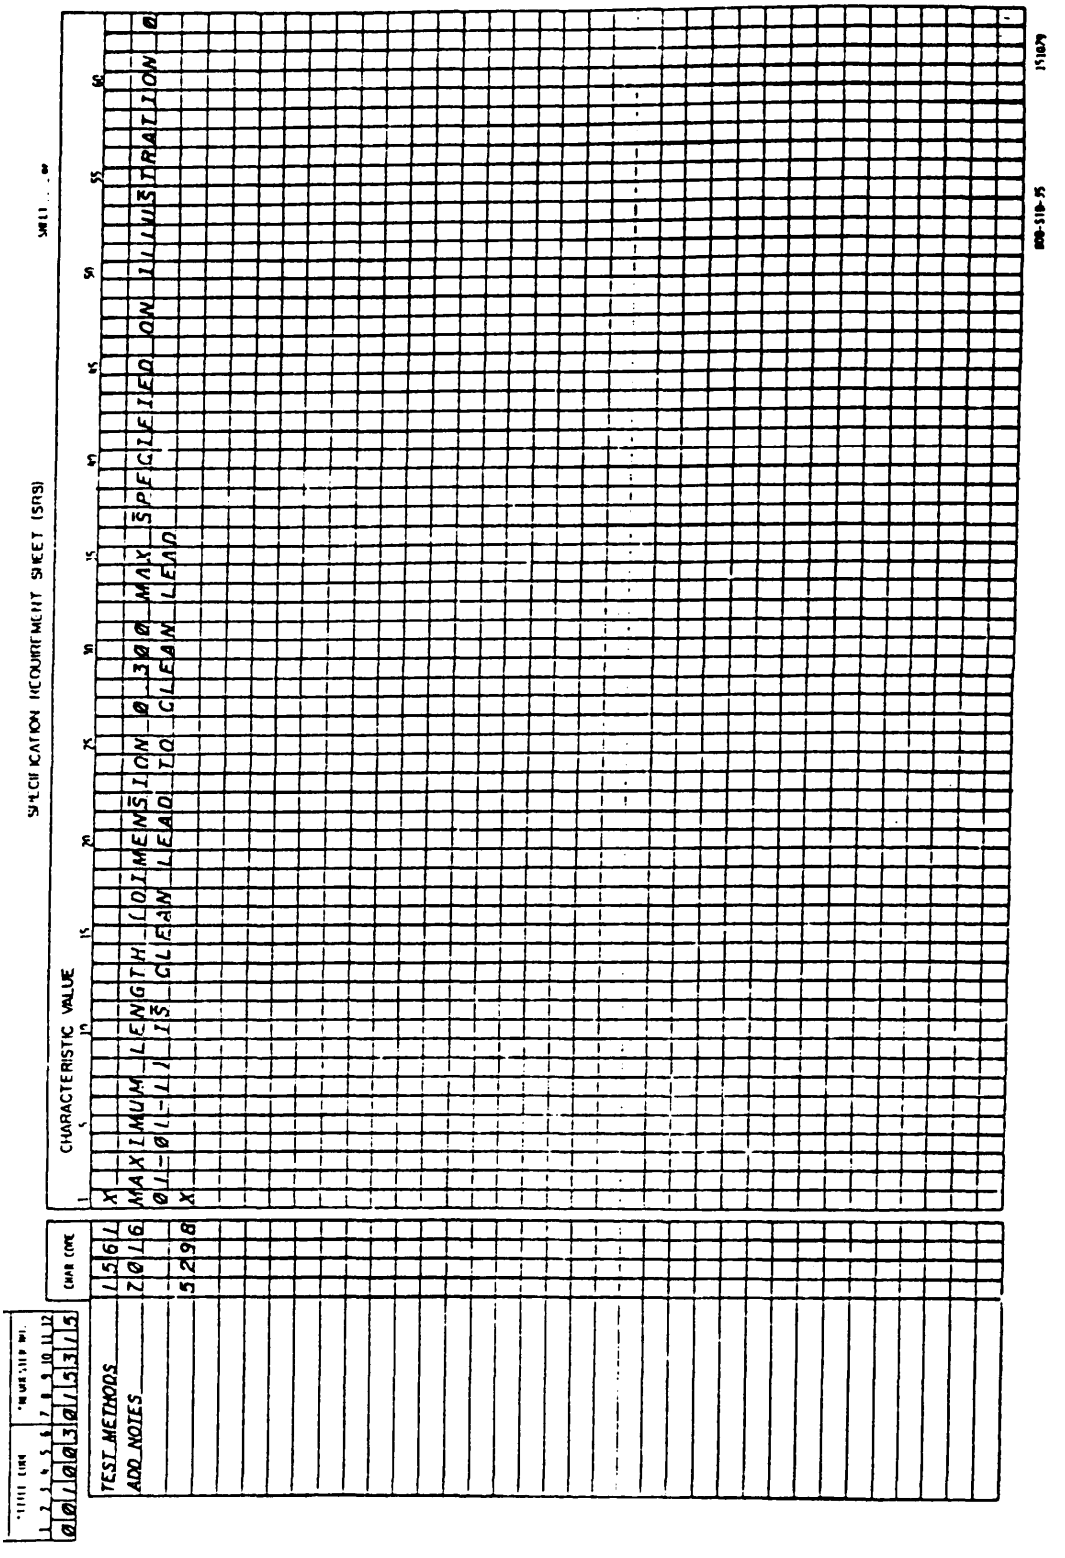

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX C

P39017-999
19 APRIL 1988

MILITARY SPECIFICATION EXCEPTION

RESISITOR, FIXED, FILM

1. SCOPE.

1.1 SCOPE. THIS DOCUMEN COVERS THE DETAILED REQUIREMENTS FOR FIXED, FILM RESISTOR.

1.2 PART NUMBER. THE PART NUMBER FOR THE ITEMS IS P39017-999, PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITy SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

1.2.1 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED,

1.3 ELECTRICAL RATINGS.

1.3.1 POWER RATING.

1.3.1.1 THE POWER RATING SHALL BE 0.25 WATT(S).

1.3.1.2 THE POWER RATING AMBIENT TEMPERATURE SHALL BE 70 DEGREES CELSIUS. 103,103 THE POWER SHALL DERATE TO ZERO WATT AT 150 DEGREES CELSIUS.

1.3.2 VOLTAGE RATING. THE MAXIMUM CONTINUOUS WORKING VOLTAGE SHALL BE 1000 VOLT(S) DC.

2. APPLICABLE DOCUMENTS.

2.1 ISSUES OF DOCUMENTS. THE FOLLOWING DOCUMENTS, OF THE ISSUE IN EFFECT ON THE DATE OF INVITATION FOR BIDS OR REQUEST FOR PROPOSAL, FORM A PART OF THIS DOCUMENT TO THE EXTENT SPECIFIED HEREIN.

SPECIFICATIONS

MILITARY

MIL-R-39017 RESISTORS, FIXED, FILM, (INSULATED) ESTABLISHED RELIABILITY GENERAL SPECIFICATION FOR

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

P39017-999

2.1 (CONTINUED)

STANDARDS

MILITARY

MIL-STD-202 TEST METHODS FOR ELECTRONIC AND ELECTRICAL PARTS

MIL-STD-1285 MARKING FOR ELECTRICAL AND ELECTRONIC PARTS

(COPIES OF SPECIFICATIONS, STANDARDS, DRAWINGS, AND PUBLICATIONS REQUIRED BY SUPPLIERS IN CONNECTION WITH SPECIFIC PROCUREMENT FUNCTIONS SHOULD BE OBTAINED FROM THE PROCURING ACTIVITY OR AS DIRECTED BY THE CONTRACING OFFICER).

3. REQUIREMENTS.

3.1 BASE DOCUMENT. THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, MIL-R-39017/1, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.

3.1.1 QUALIFICATION. ITEMS FURNISHED UNDER THIS DOCUMENT SHALL BE SUPPLIED BY MANUFACTURERS WHO ARE QUALIFIED TO SUPPLY ITEMS SPECIFIED IN THE BASE DOCUMENT .

3.2 CONFIGURATION.

3.2.1 CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 001-01-1.

3.2.1.1 ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES .

3.2.2

TABULATED CHARACTERISITIC TABLE

SUFFIX NO.	RESISTANCE (MEGOHMS)
01	0.301
02	3.010

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

3.3 RESISTANCE TOLERANCE. THE TOLERANCE SHALL BE WITHIN PLUS 1.0 AND MINUS 1.0 PERCENT.

3.4 ADDITIONAL REQUIREMENTS.
(A) RESISTOR LEADS SHALL BE CONCENTRIC TO RESISTOR BODY WITHIN 0.016 DIAMETER

3.5 PART MARKING. PART IDENTIFICATION WING SHALL BE ACCORDANCE WITH MIL-STD-1285, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.

4. QUALITY ASSURANCE PROVISIONS.

4.1 QUALITY ASSURANCE PROVISIONS. THE QUALITY ASSURANCE PROVISIONS SHALL BE IN ACCORDANCE WITH MIL-R-39017/1, AND AS SPECIFIED HEREIN. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.

4.2 QUALIFICATION INSPECTION.

4.2.1 QUALIFICATION INSPECTION. QUALIFICATION INSPECTION IS NOT REQUIRED FOR ITEMS FURNISHED UNDER THIS DOCUMENT.

4.3 QUALITY CONFORMANCE INSPECTION. THE QUALITY CONFORMANCE INSPECTION SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT AS SPECIFIED HEREIN.

4.3.1 GROUP B INSPECTION. GROUP B INSPECTION SHALL BE PERFORMED AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT AS SPECIFIED HEREIN.

4.3.1.1 GROUP B INSPECTION TABLE. THE GROUP B INSPECTION TABLE SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, SUBJECT TO THE FOLLOWING MODIFICATIONS.

MODIFICATION TO GROUP B INSPECTION TABLE

TEST TITLE	NATURE OF MODIFICATION	TITLE OF PRECEDING TEST
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE	ADD	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL

4.3.2 GROUP C INSPECTION. GROUP C INSPECTION SHALL BE PERFORMED AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT AS SPECIFIED HEREIN.

4.3.2.1 GROUP C INSPECTION TABLE. THE GROUP C INSPECTION TABLE SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, SUBJECT TO THE FOLLOWING MODIFICATIONS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX C

P39017-999

MODIFICATION TO GROUP C INSPECTION TABLE

TEST TITLE	NATURE OF MODIFICATION
LIFE	DELETE
QUARTERLY TESTS	DELETE
SEMIANNUAL TESTS	DELETE

4.4 METHODS OF INSPECTION.

4.4.1 TEST METHODS. EXAMINATION AND TESTS SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, AND AS SPECIFIED HEREIN l OTHER TEST METHODS MAY BE SUBSTITUTED UPON WRITTEN APPROVAL BY THE PROCURING ACTIVITY, PROVIDED THE SUPPLIER HAS DEMONSTRATED THAT THE RESULTS OBTAINED PROPERLY CORRELATE WITH THOSE OBTAINED USING THE METHODS SPECIFIED. THE SUPPLIER MUST ALSO DEMONSTRATE THAN SUCH SUBSTITUTION DOES NOT RELAX THE REQUIREMENTS OF THIS DOCUMENT.

4.5 RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT POWER CONDITIONING VOLTAGE SHALL BE 1000 VOLTS DC.

4.6 DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PEFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.

4.6.1 ALTITUDE SHALL BE IN ACCORDANCE WITH TEST CONDITION LETTER D OF METHOD 105 OF MIL-STD-202.

4.6.2 TEST VOLTAGE SHALL BE 1000 VOLTS, DC.

4.7 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.

4.7.1 TEST VOLTAGE SHALL BE 2000 VOLTS, DC.

4.8 INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 302 OF MIL-STD-202.

4.8.1 TEST CONDITION LETTER C SHALL APPLY.

5. PACKAGING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

5.1 PRESERVATION-PACKAGING. UNLESS OTHERWISE SPECIFIED HEREIN, THE PRESERVATION-PACKAGING SHALL BE IN ACCORDANCE WITH MIL-R-39017/l. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.

6. NOTES.

6.1 CONTRACT NUMBER OR
OFFICE SYMBOL . . . . . DAAK99-99-C-9999.

6.1.1 SYSTEM APPLICATION . . . .EXAMPLE FOR BASIC.

6.1.2 USER CODE . . . . . 30499.

6.1.3 GOVERNMENT DESIGN ACIVITY CODE . . . . . .l8876.

6.2 SOURCE(S).

6.2.1 THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).

6.2.2

SOURCE TABLE


SUFFIX NO.	CAGE NUMBER	MANUFACTURER'S PART NUMBER
01	12345 HOTSPOT RESISTOR CORP HOTSPOT CA	HSP-1/4 301 KOHM
	54321 FROZEN RESISTOR CO. COLD AK	FRO-l/4 301 KOHM
02	12345	HSP-1/4 3.01 MEGOHM
	54321	FRO-1/4 3.01 MEGOHM

6.3 ADDITIONAL NOTES.

(A) MXIMUM LENGTH (DIMENSION 0.300 MAX SPECIFIED ON ILLUSTRATION 001-01-1) IS CLEAN LEAD TO CLEAN LEAD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

P39017-999

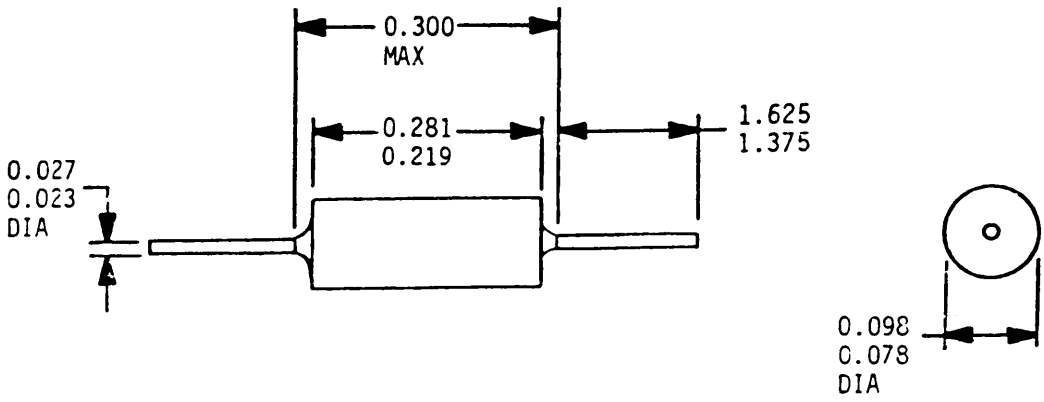

001-01-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX D


SINGLE-SECTION MSE

10. GENERAL.


10.1 SCOPE. This Appendix illustrates a SRS and the single-section MSE that is computer generated using the SRS codes and values. This Appendix is not a mandatory part of the standard. The information contained herein is intended for guidance only.

20. APPLICABLE DOCUMENTS. This section is not applicable to this Appendix.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

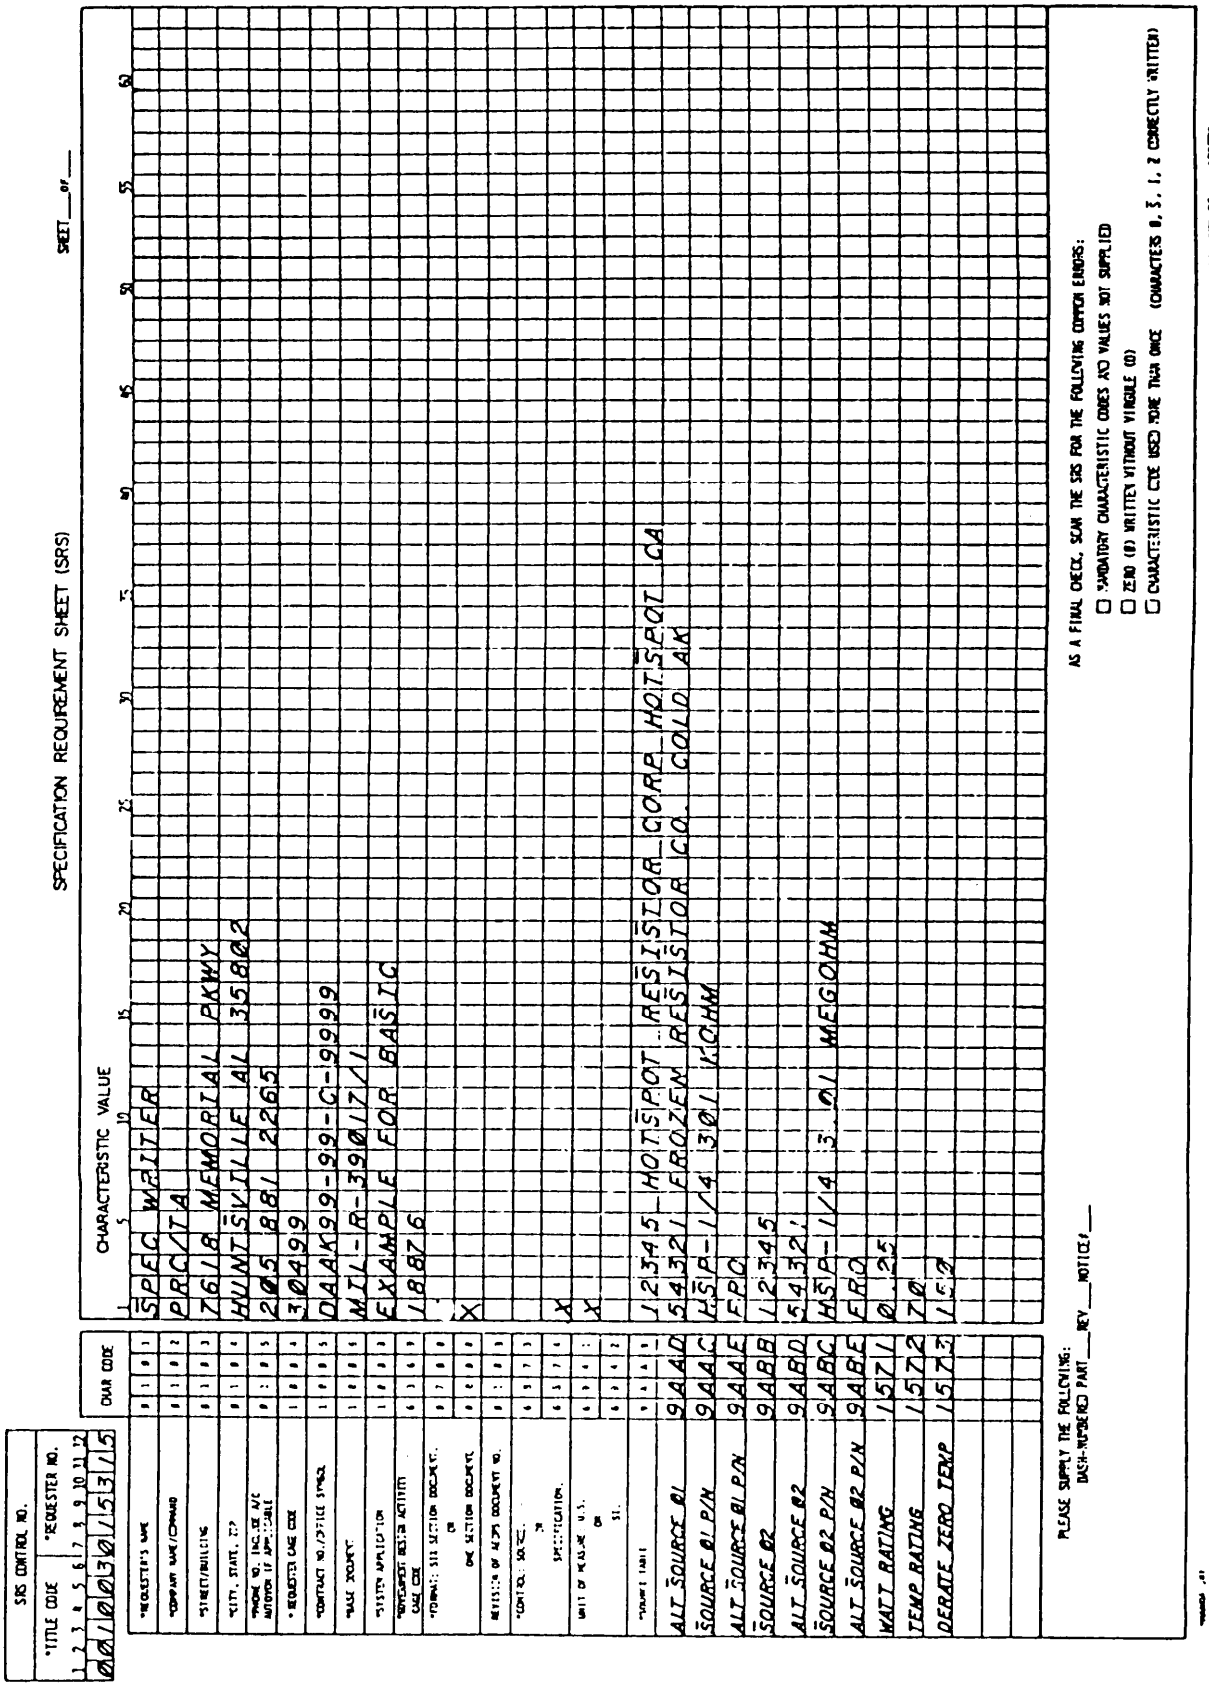


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

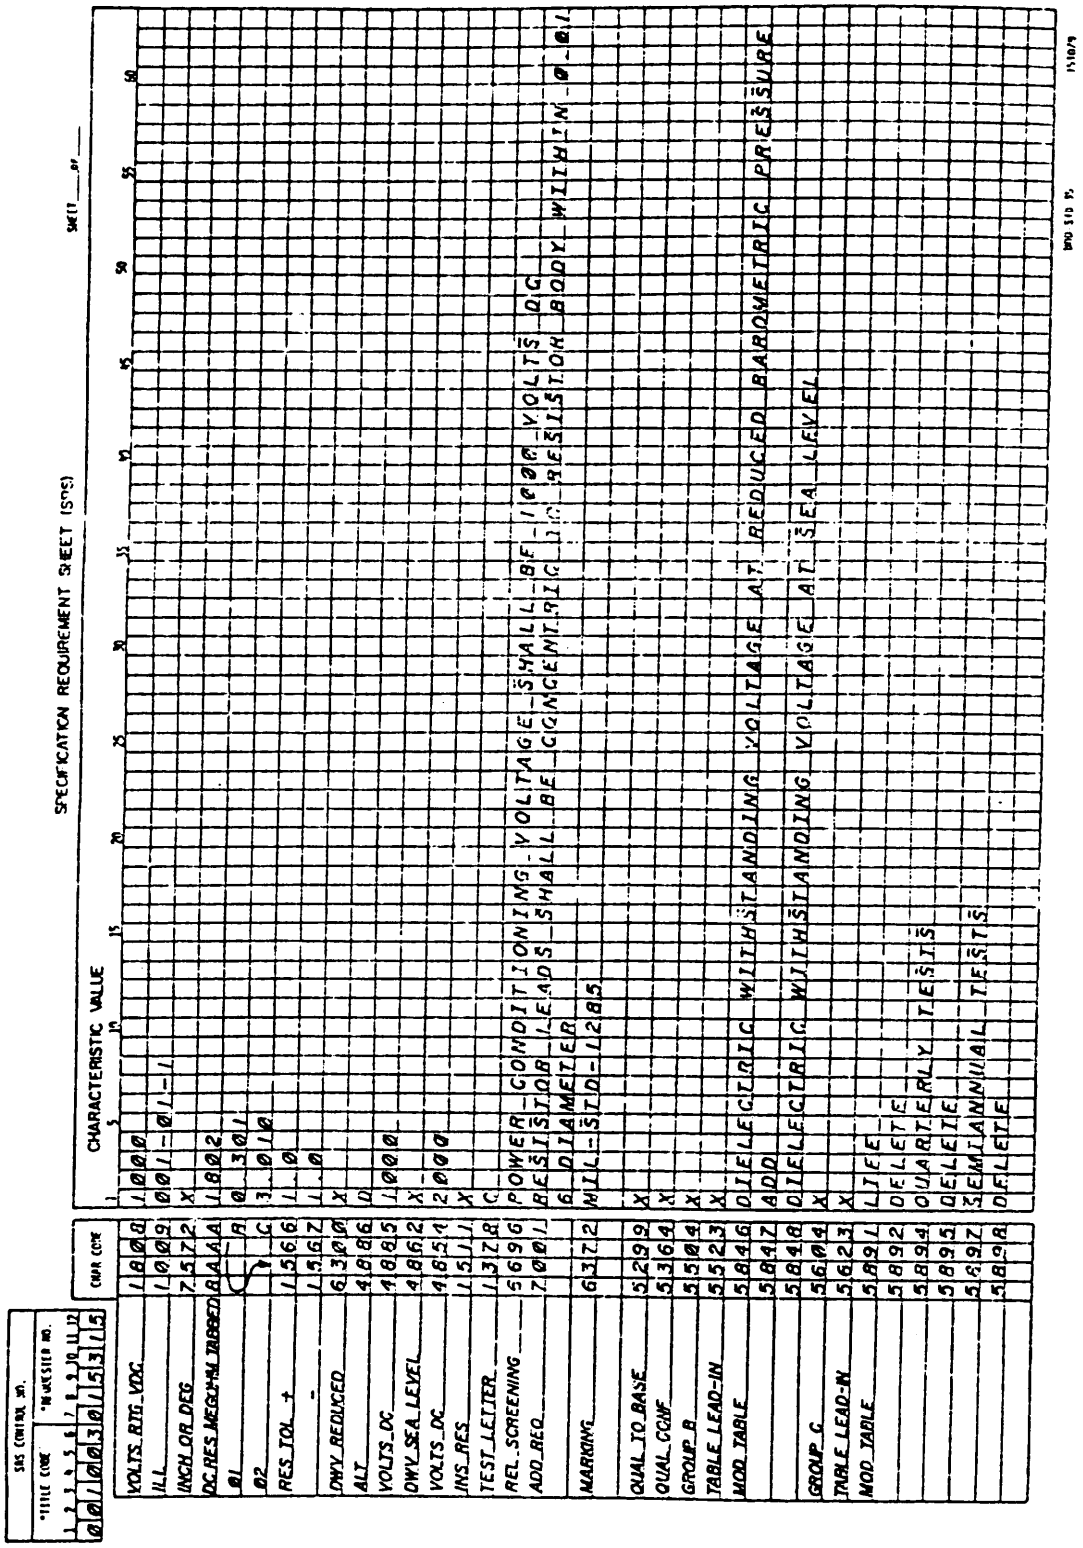

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX D

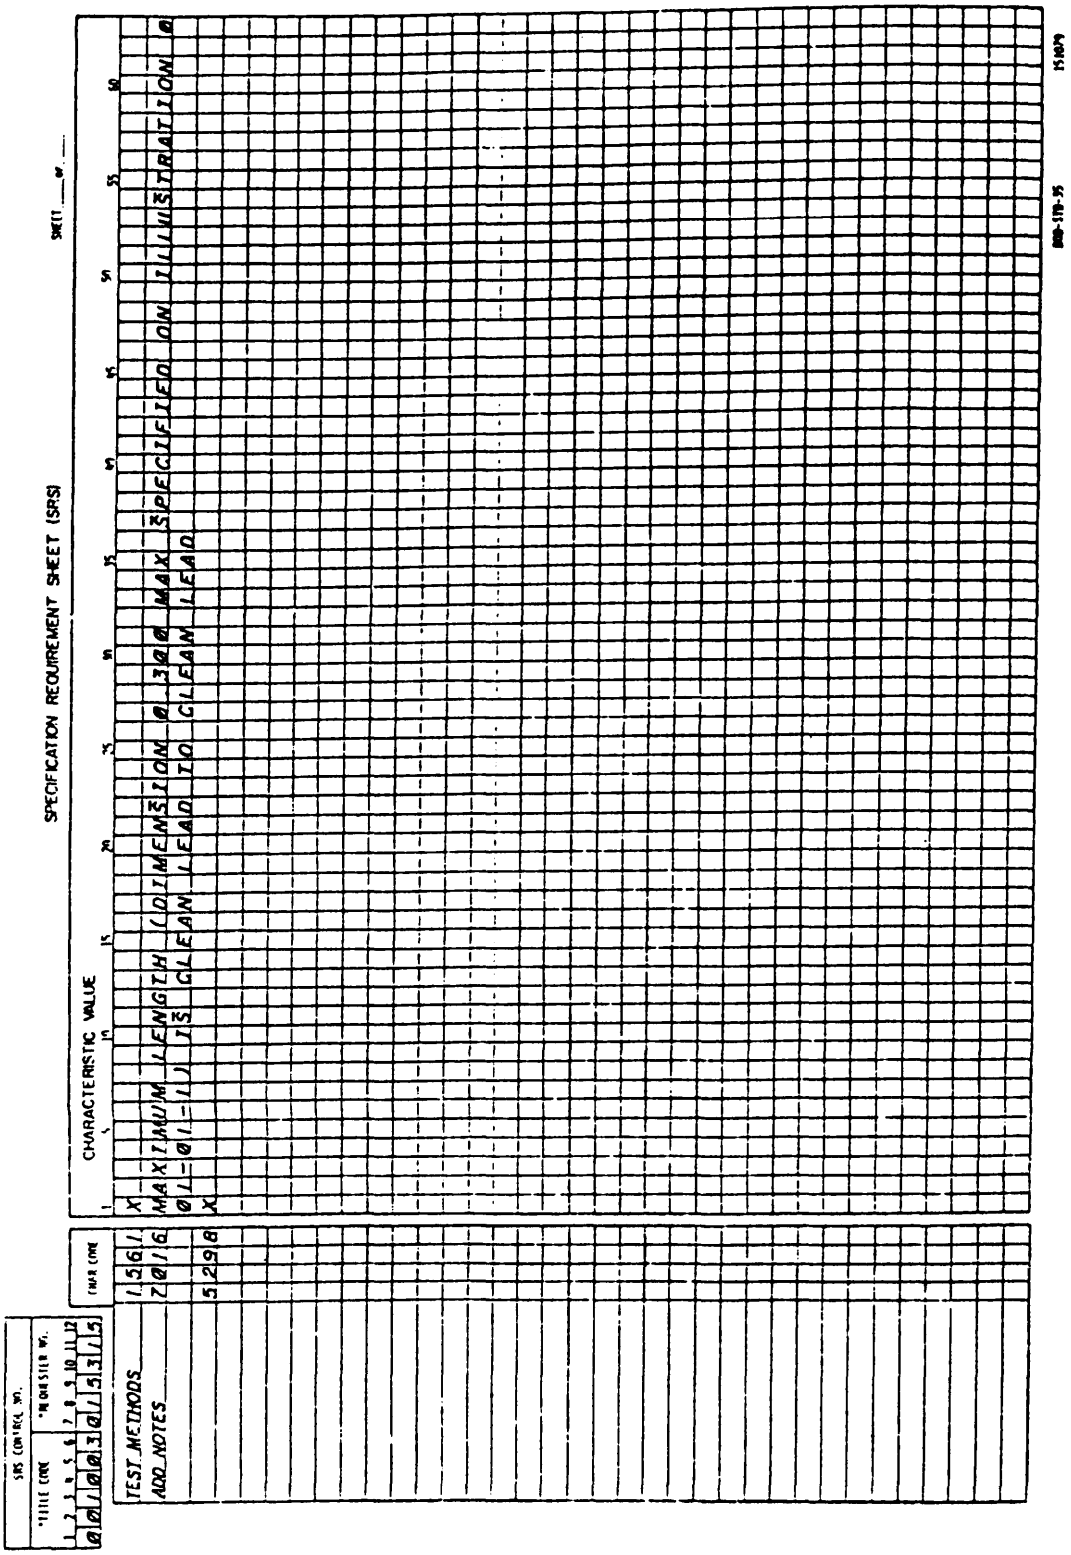

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX D

P39017-999

MILITARY SPECIFICATION EXCEPTION SHEET

RESISTOR, FIXED, FILM

THE COMPLETE REQUIREMET(S) FOR PROCURING THE ITEMS DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, MIL-R-39017/1, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.

PART NUMBER. THE PART NUMBER FOR THE ITEMS IS P39017-999, PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-FOUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.

ELECTRICAL RATINGS.

POWER RATING.

THE POWER RATING SHALL BE 0.25 WATT(S).

THE POWER RATING AMBIENT TEMPERATURE SHALL BE 70 DEGREES CELSIUS.

THE POWER SHALL DERATE TO ZERO WATT AT 150 DEGREES CELSIUS.

VOLTAGE RATING. THE MAXIMUM CONTINUOUS WORKING VOLTAGE SHALL BE 1000 VOLT(S) DC.

EXCEPTIONS.

QUALIFICATION. ITEMS FURNISHED UNDER THIS DOCUMENT SHALL BE SUPPLIED BY MANUFACTURERS WHO ARE QUALIFIED TO SUPPLY ITEMS SPECIFIED IN THE BASE DOCUMENT.

CONFIGURATION.

CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE SHOWN IN ILLUSTRATION(S) 001-01-1.

ALL DIMENSIONS, UNLESS (OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX D

P39017-999

TABULATED CHARACTERISTIC TABLE

SUFFIX NO.	RESISTANCE (MEGOHMS)
01	0.301
02	3.010

RESISTANCE TOLERANCE. THE TOLERANCE SHALL BE WITHIN PLUS 1.0 AND MINUS 1.0 PERCENT

MARKING.

PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.

ADDITIONAL REQUIREMENTS.

RESISTOR LEADS SHALL BE CONCENTRIC TO RESISTOR BODY WITH 0.016 DIAMETER.

QUALIFICATION INSPECTION.

QUALIFICATION INSPECTION. QUALIFICATION INSPECTION IS NOT REQUIRED FOR ITEMS FURNISHED UNDER THIS DOCUMENT.

QUALITY CONFORMANCE INSPECTION. THE QUALITY CONFORMANCE INSPECTION SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT AS SPECIFIED HEREIN.

GROUP B INSPECTION. GROUP B INSPECTION SHALL BE PERFORMED AS SPECIFIED IN THE BASE DOCUMENT, EXCEPT AS SPECIFIED HEREIN.

GROUP B INSPECTION TABLE. THE GROUP B INSPECTION TABLE SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, SUBJECT TO THE FOLLOWING MODIFICATIONS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

MODIFICATION TO GROUP B INSPECTION TABLE

TEST TITLE	NATURE OF MODIFICATION	TITLE OF PRECEDING TEST
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE	ADD	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL

GROUP C INSPECTION. GROUP C INSPECTION SHALL BE PERFORMED AS SPECIFIED IN THE BASE DOCUMENT , EXCEPT AS SPECIFIED HEREIN

GROUP C INSPECTION TABLE. THE GROUP C INSPECTION TABLE SHALL BE AS SPECIFIED IN THE BASE DOCUMENT, SUBJECT TO THE FOLLOWING MODIFICATIONS.

MODIFICATION TO GROUP C INSPECTION TABLE

TEST TITLE	NATURE OF MODIFICATION
LIFE	DELETE
QUARTERLY TESTS	DELETE
SEMIANNUAL TESTS	DELETE

METHODS OF INSPECTION.

TEST METHODS. EXAMINATION AND TESTS SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, AND AS SPECIFIED HEREIN. OTHER TEST METHODS MAY BE SUBSTITUTED UPON WRITTEN APPROVAL BY THE PROCURING ACTIVITY, PROVIDED THE SUPPLIER HAS DEMONSTRATED THAT THE RESULTS OBTAINED PROPERLY CORRELATE WITH THOSE OBTAINED USING THE METHODS SPECIFIED. THE SUPPLIER MUST ALSO DEMONSTRATE THAT SUCH SUBSTITUTION DOES NOT RELAX THE REQUIREMENTS OF THIS DOCUMENT .

RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT POWER CONDITIONING VOLTAGE SHALL BE 1000 VOLTS DC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

P39017-999

DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.

ALTITUDE SHALL BE IN ACCORDANCE WITH TEST CONDITION LETTER D OF METHOD 105 OF MIL-STD-202.

TEST VOLTAGE SHALL BE 1000 VOLTS, DC.

DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.

TEST VOLTAGE SHALL BE 2000 VOLTS, DC.

INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 302 OF MIL-STD-202.

TEST CONDIDTION LETTER C SHALL APPLY.

NOTES.

CONTRACT NUMBER OR
OFFICE SYMBOL . . . . . DAAK99-99-C-9999.

SYSTEM APPLICATION . . . . . .EXAPLE FOR BASIC.

USER CAGE . . . . . 30499.

GOVERNMENT DESIGN ACTIVITY CAGE . . . .18876.

SOURCE(S).

THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

P39017-999

SOURCE TABLE


SUFFIX No.	CAGE CODE	MANUFACTURER'S PART NUMBER
01	12345 HOTSPOT RESISTOR CORP HOTSPOT CA	HSP-1/4 301 KOHM
	54321 FROZEN RESISTOR CO COLD AK	FRO-1/4 301 KOHM
02	12345	HSP-1/4 3.01 MEGOHM
	54321	FRO-1/4 3.01 MEGOHM

ADDITIONAL NOTES.

MAXIMUM LENGTH (DIMENSION 0.300 MAX SPECIFIED ON FIGURE 001-01-1) IS CLEAN LEAD TO CLEAN LEAD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

P39017-999

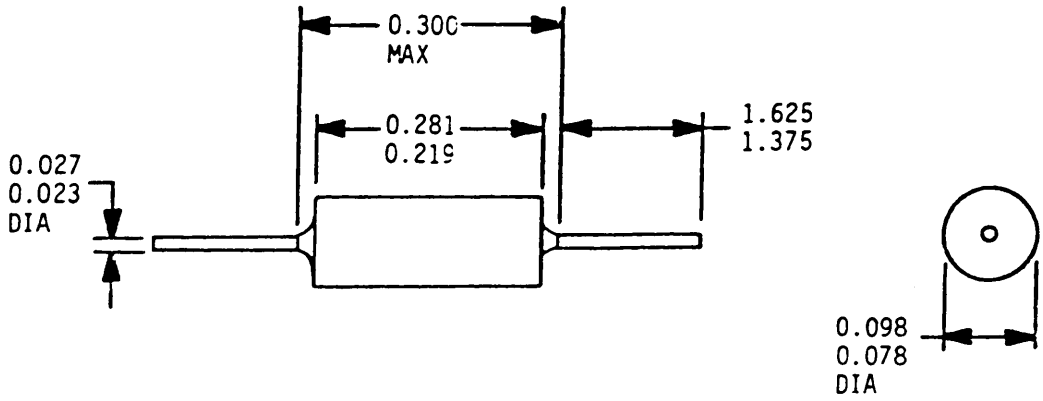

001-01-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX E

DIFFERENCES BETWEEN MIL-STD-35E AND MIL-STD-35C

10. Scope. With this issue of MIL-STD-35E, Basic, there are changes applicable to all dash-numbered parts that will be incorporated at-the next revision. Until such revisions are made, the benefits of the changes may be utilized by making use of this appendix.

20, APPLICABLE DOCUMENTS. This section is not applicable to this Appendix.

30• Nomenclature. The changes to nomenclature are as follows:

	PREVIOUS	CURRENT
a.	Applicable general specification	Base document
b.	Drawing figure number	Illustration number
c.	Examples	Figures
d.	Figures	Illustrations
e.	General Specification	Base document
f.	Generated document	MSE
g.	MIL-STD-35-1 materials	Cancelled
h.	MIL-STD-35-2 finishes	Cancelled
i.	Referenced document	Base document
j.	Specification Requirements List (SRL)	Keyword Code Index (KCI)
k.	Specification Requirements List (SRL) Table	Tabulated Characteristic Table
l.	Specification shown with code 1006	Base document
m.	Specification title index	Title Index
n.	1006 document	Base document
o.	Test procedure	Test methods

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

40. Characteristic codes.

40.1 Mandatory codes. The following codes are no longer mandatory, but may be used when exception is required.

a. Illustration code; 1009
b. Dimension codes
c. Test code; 1560 or 1561
d. First article inspection code; 5203, 5204, and 5205
e. Qualification inspection code; 5298 or 5299
f. Materials inspection code; 5350, 5352, and 5353
g. Quality conformance inspection code; 5362, 5363, and 5364
h. Applicable documents codes

40.2 Obsolete codes. The following codes are obsolete and no longer in the data base for use:

a. Item name code; 1007
b. Codes which are used to specify inspection, test or requirements per the 1006 (base) document (specify only exceptions in MSE).
c. Single item source table; codes 5001 through 5012
d. Several codes formerly in inspections. Use only those codes shown on the flow charts in Appendix A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX E

50• System changes.

50.1 Applicable documents. Changes to the computer program have changed the requirements for the use of the APPLICABLE DOCUMENTS TABLE, Table II. The use of Table II for entering documents referenced in sections 3, 4, and 5 of an MSE is now optional (see 5.16).

50.2 Table values. Tables in dash-numbered parts prior to 1975 required that three dashes (---) be used for unknown values. System changes now prohibit the use of three dashes.

50.3 MSE formats. AEDPS now has the capability to produce MSEs in two formats; six-section and single-section. To illustrate the two formats a MSE has been prepared in each format.

50.3.1 Six-section MSE. Appendix C is an example pf a six-section MSE. This format is a result of entering code 0700 and an "X" on the SRS.

50.3.2 Single-section MSE. Appendix D is an example of single-section MSE. This format is a result of entering code 0800 and an "X" on the SRS.

50.4 Specification Requirements List (SRL). The KCI of this document serves the same purpose as the Specification Requirements List (SRL).

50.4.1 SRL and KCI comparison. Enclosure E-1 (example 62 from MIL-STD-35C) and enclosure E-2 (figure 28 of this document) are included for comparison. The characteristic name and code designations of the KCI are the same as those of the SRL. The conventions for indentation, placement and use of the "*" are the same (see enclosure E-1 and E-2).

Note that the SRL heading "REF. PARA." (see enclosure E-1) and the paragraph numbers do not appear on the KCI (see enclosure E-2). The format in which the paragraph keywords and code appear on a left-hand page opposite the standard paragraphs, indicates what SRS entries are required (see 5.20). Instructions for use of the KCI apply also to the use of an SRL (see 5.20).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

MIL-STD-35C(MI)
15 August 1975

SPECIFICATION REQUIREMENTS LIST (SRL)

REF. PARA.	CHARACTERISTIC NAME	CODE
5.6	*Applicable Documents — This specification requirement shall always be supplied (Observe "*" placement)	Table B
5.7	Materials — These specification requirements are optional	Table C
5.8	Finish	Table D
5.9	Storage Temperature Range	
	Low Temperature (deg C)	0000
	*High Temperature (deg C)	0000
	These two specification requirements shall be supplied when optional underlined specification requirement above is required. (Observe "*" placement)	
5.10	Humidity	
	(Select one test method)	
	Test per 1006 document	0000
	Test per 1006 document except _____	0000
	Test per MIL-STD-202, Method 103	
	*Test condition letter	0000
	It is mandatory to specify this value when test is to be detailed. (Observe "*" placement)	
	Duration of application of polarizing voltage (hours)	0000
	It is optional to specify this value.	

EXAMPLE 62

ENCLOSURE E-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT____	4884
PER MIL-STD-202, METHOD 301.	6300
*ALTITUDE PER METHOD 105 OF MIL-STD-202, TEST CONDITION (LETTER)	4886
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4885
(VOLTS, AC)	4849
POINTS OF VOLTAGE APPLICATION	
BETWEEN MUTUALLY INSULATED PARTS	6292
BETWEEN ALL INSULATED PARTS AND GROUND	6293

FIGURE 33. KCI indentation format.

ENCLOSURE E-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

Note that the KCI (see enclosure E-2) does not contain an entry “Test per 1006 document” or “Requirement(s) per 1006 document”. Eliminated is the requirement that for every exception in section 3, there must be an exception in section 4 of the MSE, and vice versa. Thus, the respective keywords and codes no longer appear (see 30.2.b). This rule applies to all dash-numbered parts.

50.5 MSE Number. On 1 October 1976 the MSE numbering systems was changed from the ME numbering system to the “P” numbering system to include the stem number of the base document (see 4.5).

60. Dash-numbered part changes.

60.1 Table identification. Some of the dash-numbered parts refer to tables by table letter; such as DIMENSION TABLE, Table A; APPLICABLE DOCUMENTS TABLE, Table B, etc. Use table titles and numbers to find the tables in Appendix B of this document. All tables of Appendix B may be used with dash-numbered parts released before January 1978.

60.2 Legend Index. The legend index shown in some dash-numbered parts is no longer applicable. When a new illustration is being submitted for incorporation in AEDPS, any legend may be assigned to any dimension. Also, the dimensions required may be shown on the submitted illustration, and the illustration in the MSE will contain the dimension in lieu of legends. When dimensions are tabulated, legends must be shown on the illustration for the tabulated dimensions (see 5.12).

60.3 Figure Titles. Figures are now illustrations and titles are no longer included.

60.4 Test Sequence. Dash-numbered parts since July 1974 have tests and requirements in alphabetical sequence for easier location within the book. Books released utilizing a KCI will have requirement options shown before test method options, which is a reversal from previous books.

60.5 Characteristic name contained in dash-numbered parts after January 1978. Dash-numbered parts released after January 1978 contain all mandatory characteristics, ratings, design parameters, requirements, and test which may be exceptions to a base document. After all exceptions have been completed using the dash-numbered part book, refer to the basic (MIL-STD-35) to specify exceptions to quality assurance provisions, packing, packaging, and notes. The following KCI contains characteristic names that were in MIL-STD-35C and do not appear in MIL-STD-35E. These characteristic names are included in dash-numbered parts released after January 1978 and are provided here for use with dash-numbered parts released before that date.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX E

THIS PAGE WAS INTENTIONALLY LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A ____	7001
B ____	7002
C ____	7003
D ____	7004
E ____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629
ADDITIONAL PART MARKING	
A ____	6991
B ____	6992
C ____	6993
D ____	6994
E ____	6995

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(c) 7003.
7004	(D) 7004.
7005	(E) 7005.
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING. PART IDENTIFICATION WING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
UNITS OF MEASURE (SELECT ONE)	
U.S. (SELECT ONE)	6941
INCHES.	7572
	7573
YARDS.	7574
SI. (SELECT ONE)	6942
CENTIMETERS.	7576
MILLIMETERS.	7577
METERS.	7578

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6941	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-FOUND UN I TS (U.S l) OR DEGREES UNLESS OTHERWISE SPECIFIED.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES .
7573	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN FEET OR DEGREES .
7574	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL, BE IN YARDS OR DEGREES.
6942	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (S1) OR DEGREES UNLESS OTHERWISE SPECIFIED.
7576	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN CENTIMETERS OR DEGREES .
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES .
7578	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN METERS OR DEGREES .

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX E

THIS PAGE WAS INTENTI0NALLY LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:23Z
Check the source to verify that this is the currentversion before use.

APPENDIX F

THE APPLICABILITY MATRIX

10.0 SCOPE

10.1 This appendix establishes criteria for the partial and incremental application of the requirements of this standard. This Appendix is not a mandatory part of the standard. The information contained herein is intended for guidance only.

20.0 APPLICABLE DOCUMENTS

20.1 The following documents form a part of this standard to the extent specified herein:

STANDARDS

Military

MIL-STD-280 Definition of Item Level, Item Exchangeability, Models and Related Terms

OTHER PUBLICATIONS

DOD Directive 5000.1 Acquisition of Major Defense Systems

30.0 DESCRIPTION AND USE

30.1 The field of the applicability matrix table utilizes coded symbols to describe the relative importance of the specific requirement during the phase and for the type of program indicated by the location of the symbol. This table should be used as a guide only.

30.2 The left hand column of the matrix table contains alphanumeric references to each of the requirements in the specification or standard. The references will be at the numbered paragraph level and sentence level where necessary.

30.3 The top of the matrix provides a description for grouping of requirements.

30.3.1 The acquisition phase designators in the first line establish a basis for determining applicability to each phase of development or production as based on DOD Directive 5000.1, i.e., Program Initiation, Demonstration and Validation, Full Scale Development, and Production.

30.3.2 The second line contains hardware model level descriptions, in accordance with the definitions of MIL-STD-280, for each acquisition phase.

30.3.3 The third line contains program type designators (see 40.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX F

40.0 APPLICATION

40.1 Program Type Designators

Type I -A program whose objective is to acquire, or eventually acquire, a fully implemented production quantity of complex equipment and parts.

Type II -A program whose objective is to acquire, or eventually acquire, a fully implemented production quantity of noncomplex equipment and parts.

Type III -A program whose objective is to acquire, or eventually acquire, a small quantity of noncomplex equipment(s).

Type IV -A program whose objective is to acquire, or eventually acquire, a small quantity of complex equipment(s).

40.2 Relative Importance Symbol Definitions

NR - Not recommended

A - Applicable

D - Deferred to later phase

NA - Not applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPLICABILITY MATRIX TABLE

PROGRAM TYPE DESIGNATOR 1	ACQUISITION PHASE				
	PROGRAM INITIATION MILESTONE 0 EXPLORATORY DEV	DEMO & VALIDATION MILESTONE I ADVANCED DEV	FULL SCALE ENGINEERING DEVELOPMENT MILESTONE II		PRODUCTION & DEPLOYMENT MILESTONE III PRODUCTION
			ENG DEV	PRE-PROD (LIP)	
I	NA	D	A	A	A
II	NA	D	A	A	A
III	NA	NR	NR[2]	NR[2]	NR[2]
IV	NA	NR	NR[2]	NR[2]	NR[2]

NOTES:

1. See Definitions, Appendix F, 40.1
2. Required if Reprocurement is Anticipated

NA - Not Applicable
D - Deferred to Later Phase
NR - Not Recommended
A - Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX F

INTENTIONALLY LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX G

DATA

10.1 This standard requires the delivery of data. The types of deliverable data products are:

Specification Requirements Sheets (SRS)
Remote terminal entry
Complete Vendor data

The task requirement for the deliverable data is paragraph 4.3 of the basic DOD-STD-35.

10.2 The Government and Contractor will agree upon one of the above types. Delivery will then be in accordance with Data Item Description DI-E-1133 and the DD Form 1423.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX H

CHARACTERISTIC CODE INDEX

10. GENERAL.

10.1 CHARACTERISTIC CODE INDEX. This Appendix references codes to pages where they appear in this standard. This Appendix is not a mandatory part of the standard. The information contained herein is intended for guidance only.

20. APPLICABLE DOCUMENTS. This section is not applicable to this Appendix.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX H

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1010	118	5224	62	5350	52	5473	68
THRU	THRU	5226		5352	52	5474	68
1369	120	THRU		5353	52	5477	70
1530	110	5250	162	5356	92	5482	68
1531	110	5252	60	5357	94	5484	68
1560	98	5254	58	5359	92	5485	72
1561	98	5255	58	5360	94	5492	68
4541		5256	58	5362	64	5494	68
THRU		5258	56	5363	64	5496	68
4660	154	5259	58	5364	64	5497	72
4690	106	5260	56	5372	64	5502	74
4910	54	5262	56	5373	64	5503	74
4911	54	5263	56	5374	64	5504	74
4912	54	5264	56	5382	64	5505	74
4913	54	5266	56	5383	64	5512	74
4914	54	5267	58	5384	64	5514	76
4915	54	5268	56	5392	96	5522	76
4917	54	5269	62	5393	96	5523	76
4918	54	5270	62	5394	96	5524	78
4931	54	5272	60	5395	96	5526	
5021		5274	92	5396	96	THRU	
THRU		5275	92	5403	68	5550	167
5025	154	5276	92	5404	68	5552	74
5026		5277	94	5412	68	5553	76
THRU		5278	60	5414	70	5554	76
5030	153	5279	62	5422	70	5555	76
5080		5280	92	5423	70	5556	74
THRU		5281	92	5424	72	5560	
5199	153	5282	56	5426		THRU	
5202	60	5283	58	THRU		5567	177
5203	60	5285	56	5450	164	5572	74
5204	60	5287	58	5452	68	5573	74
5205	60	5290	62	5453	70	5574	74
5208	92	5292	62	5454	70	5582	74
5210	92	5295	62	5455	70	5584	74
5212	60	5298	56	5457	70	5585	78
5214	62	5299	54	5460		5592	76
5216	92	5300	56	THRU		5594	76
5218	94	5301		5467	177	5596	76
5219	60	THRU		5469	92	5597	78
5222	62	5345	161	5472	68	5602	80
5223	62						

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX H

CHARACTERISTIC CODE INDEX (cont)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
5603	80	5712	86	5891		6871	174
5604	80	5714	88	THRU		6872	174
5605	80	5722	88	5935	168	6875	
5612	80	5723	88	5936		THRU	
5614	82	5724	90	THRU		6919	158
5622	82	5726		5980	170	6941	210
5623	82	THRU		6015		6942	210
5624	84	5750	171	THRU		6949	112
5626		5752	86	6094	116	6950	
THRU		5754	88	6095		THRU	
5650	169	5755	88	THRU		6979	117
5652	80	5756	88	6114	117	6980	
5654	82	5757	88	6115		THRU	
5655	82	5758	88	THRU		6989	174
5656	82	5759	88	6154	116	6991	208
5657	82	5760	88	6155		6992	208
5658	82	5761	88	THRU		6993	208
5659	82	5762	88	6174	117	6994	208
5660	82	5763	88	6223	108	6995	208
5661	82	5764	88	6372	208	7001	208
5662	82	5765	88	6379		7002	208
5663	82	5766	88	THRU		7003	208
5664	82	5767	88	6408	172	7004	208
5665	82	5768	88	6410		7005	208
5666	82	5769	88	THRU		7006	108
5667	82	5772	86	6499	157	7007	108
5668	82	5773	90	6501	175	7008	108
5669	82	5775	90	THRU	AND	7009	108
5672	80	5782	86	6600	176	7010	108
5673	84	5784	86	6615		7011	96
5675	84	5785	90	THRU		7012	96
5682	80	5792	86	6694	155	7013	96
5684	80	5796	86	6715		7014	96
5685	84	5797	90	THRU		7015	96
5692	80	5801		6764	156	7016	112
5696	80	THRU		6870	208	7017	112
5697	84	5845	163			7018	112
5702	86	5846				7019	112
5703	86	THRU				7020	112
5704	86	5890	166				
5705	86						

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (cont)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
7351		7812	66	8AAA	121		
THRU		7813	66	THRU	THRU		
7379	159	7814	66	8TDW	132		
7432	110	7815	66	9AAB	133		
7511	104	7816	66	THRU	THRU		
7515	106	7817	70	9DVM	152		
7525	54	7818	70				
7530	64	7819	72				
7540	92	7820	72				
7545	98	7821	72				
7546	98	7822	76				
7547	100	7823	78				
7548	100	7824	78				
7549	100	7825	78				
7550	100	7826	78				
7551	100	7827	78				
7552	100	7828	84				
7553	102	7829	84				
7554	102	7830	90				
7555	100	7831	90				
7557	102	7832	94				
7558	102	7833	94				
7559	102	7834	92				
7560	104	7835	94				
7561	104	7836	94				
7562	104	7842	58				
7563	106	7843	58				
7564	106	7850	94				
7565	106	7851					
7566	100	THRU					
7570	108	7855					
7571	108	7861					
7572	210	THRU					
7573	210	7885	165				
7574	210	7886					
7576	210	THRU					
7577	210	7905	173				
7578	210	7920					
7629	208	THRU					
7630	208	7964	160				
7640	98						

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Abbreviations	18
Additional notes	33,102
Additional packaging requirements	32,98
Additional part marking	32,196
Additional quality assurance provisions	32,86
Additional requirements	32,196
Additional write-in characteristics	32
AEDPS titles	2-7
Applicable documents	29,106,191
Applicability Matrix	201
Asterisk	34
Automated data base	9
Automatic MSE data	30,38
Base document	9,13,24
Changes from previous issue	37
Characteristic code	9
Characteristic code index	205
Characteristic name	9,33
Characteristic value	9
City, state, zip code	24
Column width	20
Company name/command	24
Concept	11
Configuration	26
Contract number/office symbol	24
Dash-numbered part book	2-6,9
Dash-numbered parts prior to January 1977	1,189
Data requirements	37,100
Definitions	9
Dimensions	27
Dimension tabulation candidates	108
Document date	16
Document number	13
Draft MSE	16
Edit routine	36
Exponential values	19
Federal specification	13
Federal standard	14
Finishes	29
Finish table	144
First article inspection	50
First article inspection tables	150-152
Flow charts	38
Format	24

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX (cont)

	Page
Fractions	19
General requirements for understanding AEDPS	11
Government documents	7
Government design activity CAGE CODE	24
Group A inspection	58
Group A inspection tables	153-155
GROUP B inspection	64
Group B inspection tables	156,157
Group c inspection	70
Group c inspection tables	158,159
Group D inspection	76
Group D inspection tables	160,161
Illustrations	26
Inch-pound	25
Industry standard	14
Ingredient table	146
Inspection conditions	44
Intended use	37,98
Interrelationship of KCI characteristic names	33
KCI characteristic name punctuation	33
Keyword Code Index (KCI)	9,33,38
Lead-in statements	36
Limited tabulation	15
Lot control	100
Mandatory requirements	23,190
Marking (shipping containers)	98
Material table	143
Materials	27
Material inspection	42
Methods of inspection	88
Method of submitting requirements	1
Military specification	14
Military specification exception document (MSE)	9
Military standard	14
MIL-M-38510	15
Mounting hardware table	145
MSE acceptance	16
MSE formats	11
MSE revision	16
Multi-1ine characteristic value	22
Nomenclature	32,190
Nomenclature table	102,167
Non-government publications	7
Notes	37,99

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX (cont)

	Page
Obtaining illustrations	26
Order of precedence	8
Organization	1
Over-specifying	1
Packaging inspection	86
Packaging inspection sampling plan	86
Packaging	88
Packing	92
Part marking	196
Part number	14
Part number cross-reference table	100,165,166
Performance characteristic table	147
Prefixes	18
Phone number	24
Preliminary MSE	16
Preservation-packaging	88
Prior acceptance	102
Procurement sources	26
Purpose	1
Qualification	44
Qualification inspection	46
Qualification inspection tables	148,149
Quality assurance prevision s	38,42-88
Quality assurance tables	39,148-164
Quality conformance inspection	54
Referenced documents	7
Request for MSE	11
Requester	9
Requester's CAGE CODE	24
Requester's name	23
Requester's number	9,23
Revision of existing MSE	16,26
Revision letter	14
Schematics and nondimensioned illustrations	27
Scope	1
Serial number	14
SI	25
Single-section MSE format	11,25,180
Six-section MSE format	11,24,169
Source control MSE	25
Source table	20,26,123
Spaces within document identifiers	31
Specification control MSE	25

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX (cont)

	Page
Specification requirements list (SRL)	9,191,192
Specification requirements sheet (SRS)	17,214,215
Specifications, standards and handbooks	7
SRL and KCI comparison	191
SRS control number	9
SRS preparation	17
Standard paragraph	10,38
Stem number of base document	14
Street/building	24
Subject matter	11
Subject term (keyword) listing	37
Suffix number	20,29
Superseded document	33,98
Superseded document table	164
System application	24
Table value entry	20,191
Tables	
Tabulation	29
Tabulated characteristics table	111
Tailoring	1
Temperature	19
Test Methods	88
Title code	10,23
Tolerance	18
Units of measure	25,198
Use of tables	20
User	10
Visual and mechanical inspection	88
Workmanship	196
Writing methodology	17
100 percent inspection	82
100 percent inspection table	162,163

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET___OF___

SRS CONTROL NO.	
*TITLE CODE (1 2 3 4 5 6)	*REQUESTER NO. (7 8 9 10 11 12)

	CHAR CODE
*REQUESTER'S NAME	Ø 1 Ø 1
*COMPANY NAME/COMMAND	Ø 1 Ø 2
*STREET/BUILDING	Ø 1 Ø 3
*CITY, STATE, ZIP	Ø 1 Ø 4
*PHONE NO. INCLUDE A/C AUTOVON IF APPLICABLE	Ø 1 Ø 5
*REQUESTER FSCM	1 Ø Ø 4
*CONTRACT NO./OFFICE SYMBOL	1 Ø Ø 5
*BASE DOCUMENT	1 Ø Ø 6
*SYSTEM APPLICATION	1 Ø Ø 8
*GOVERNMENT DESIGN ACTIVITY FSCM	6 3 6 9
*FORMAT: SIX SECTION DOCUMENT.	Ø 7 Ø Ø
OR ONE SECTION DOCUMENT.	Ø 8 Ø Ø
REVISION OF AEDPS DOCUMENT NO.	Ø 1 Ø 8
*CONTROL: SOURCE.	6 8 7 3
OR SPECIFICATION.	6 8 7 4
UNIT OF MEASURE: U.S.	6 9 4 1
OR SI.	6 9 4 2
*SOURCE TABLE	9 A A B

CHARACTERISTIC VALUE

1 5 10 15 20 25 30 35 40 45 50 55 60

PLEASE SUPPLY THE FOLLOWING:
DASH-NUMBERED PART___REV.___NOTICE#___

AS A FINAL CHECK, SCAN THE SRS FOR THE FOLLOWING COMMON ERRORS:

- ☐ MANDATORY CHARACTERISTIC CODES AND VALUES NOT SUPPLIED
- ☐ ZERO (Ø) WRITTEN WITHOUT VIRGULE (O)
- ☐ CHARACTERISTIC CODE USED MORE THAN ONCE (CHARACTERS Ø, S̄, I, Z CORRECTLY WRITTEN)

*MANDATORY

Source: https://assist.dla.mil -- Downloaded: 2026Ø-26T07:23Z
Check the source to verify that this is the current version before use.

SRS CONTROL NO.	
*TITLE CODE 1 2 3 4 5 6	*REQUESTER NO. 7 8 9 10 11 12

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET____OF____

CHAR CODE	CHARACTERISTIC VALUE 1 5 10 15 20 25 30 35 40 45 50 55 60

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - MI
Navy - SH
Air Force - 11

Review activities:
Army - AR, AT, CR, EA, SL, TE, TM
Navy - TD
DLA - ES, IS

Preparing activity:
Army - MI

(Project EDS-A367)

*U.S. GOVERNMENT PRINTING OFFICE: 1991--504-034/50269

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.