MIL-STD-35-101(MI)
10 MAY 1976

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

RELAYS, SOLID-STATE

FSC-EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA. 22333

Automated Engineering
Document Preparation System,
Relays, Solid-State

MIL-STD-35-101(MI)

1. This Military Standard is approved by the U.S. Army Materiel Development and Readiness Command, Department of the Army, and is approved for use by all its activities. All other military activities are required to employ this Standard where suitable.

2. Recommened corrections, additions or deletions should be addressed to Commander, U.S. Army Missile Command, ATTN: DRSMI-RCS, Redstone Arsenal, Alabama 35809.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of MIL-STD-35-101(MI) is to facilitate the preparation of Military Specification, Exceptions for Solid-State Relays.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the basic MIL-STD-35.

3. It is important that the procedure described in the basic document (MIL-STD-35C) and subsequent revisions be followed explicitly in order for the computer to produce a document suitable for competitive procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of MIL-STD-35C. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS

SECTION	TITLE	INSTR PAGE	SRL PAGE
SECTION 1	INTRODUCTION	1-1	
1.1	Scope	1-1	
1.2	Purpose	1-1	
1.3	Format	1-1	
1.4	Military Specification, Exception Title Index	1-2	
1.4.1	Title	1-2	
1.4.2	Index	1-3	
SECTION 2	APPLICABLE DOCUMENTS	2-1	
SECTION 3	DEFINITIONS	3-1	
SECTION 4	GENERAL DESCRIPTION OF AEDPS	4-1	
SECTION 5	DETAILED DESCRIPTION OF AEDPS	5-1	
5.1	Introduction	5-1	
5.2	Specification Requirement Sheet (SRS)	5-1	
5.3	Specification Requirements	5-1	
5.3.1	Mandatory Specification Requirements	5-1	
5.4	Code 1006 Requirements and Test Methods	5-2	
5.5	Approved Item Name Code	5-2	
5.6	Dimensions and Figures	5-2	
5.7	Applicable Documents	5-2	
5.8	Tabulation	5-5	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS

SECTION	TITLE	INSTR PAGE	SRL PAGE
5.9	Electrical Characteristics	5-6	5-67
5.10	Poles	5-8	5-67
5.11	Pin Identification	5-8	5-67
5.12	Design and Construction	5-9	5-68
5.13	Weight	5-10	5-69
5.14	Altitude Range	5-10	5-69
5.15	Temperature Rating	5-10	5-70
5.16	Design Reliability Rating	5-10	5-70
5.17	Mounting Hardware	5-11	5-70
5.18	Altitude	5-12	5-71
5.19	Bias Current	5-13	5-72
5.20	Capacitance	5-14	5-73
5.21	Closed-contact Voltage Drop and Stability	5-14	5-74
5.22	Crosstalk	5-15	5-75
5.23	Current Rating	5-16	5-76
5.24	DC Offset Voltage	5-17	5-77
5.25	Dielectric Withstanding Voltage at Reduced Barometric Pressure	5-18	5-78
5.26	Dielectric Withstanding Voltage at Sea Level	5-20	5-80
5.27	Electrical System Spike	5-21	5-82

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS (CONT)

SECTION	TITLE	INSTR PAGE	SRL PAGE
5.28	Electromagnetic Interference	5-23	5-84
5.29	Input Current Sensitivity	5-24	5-85
5.30	Input Resistance	5-25	5-86
5.31	Insulation Resistance	5-25	5-87
5.32	Isolation (Overdrive and Overload)	5-27	5-89
5.33	Leakage Current	5-28	5-90
5.34	Moisture Resistance	5-30	5-91
5.35	Open-Contact Resistance	5-32	5-94
5.36	Power Dissipation	5-32	5-95
5.37	Reliability Screen (Burn-In, Aging, Conditioning, Stabilization, Load Life, Overload)	5-33	5-96
5.38	Resistance to Soldering Heat	5-36	5-98
5.39	Resistance to Solvents	5-37	5-99
5.40	Salt Spray	5-37	5-100
5.41	Seal	5-39	5-102
5.42	Shock, Specified Pulse	5-42	5-104
5.43	Solderability	5-43	5-106
5.44	Speed-Distortion	5-45	5-107
5.45	Temperature, High	5-46	5-109
5.46	Temperature, Low	5-48	5-111
5.47	Terminal Strength	5-50	5-113

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS (CONT)

SECTION	TITLE	INSTR PAGE	SRL PAGE
5.48	Thermal Shock	5-51	5-114
5.49	Transient Voltage	5-52	5-116
5.50	Turn-Off Time	5-54	5-118
5.51	Turn-Off Voltage	5-55	5-119
5.52	Turn-On Time	5-56	5-120
5.53	Turn-On Voltage	5-57	5-121
5.54	Vibration, High Frequency	5-57	5-122
5.55	Vibration, Low Frequency	5-60	5-124
5.56	Vibration, Random	5-62	5-126
5.57	Waveform Distortion	5-65	5-129
SECTION 6	USE OF AEDPS	6-1	
6.1	Procedure	6-1	
SECTION 7	FIGURES	7-1	
SECTION 8	TABLES	8-1	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT
PREPARATION SYSTEM (AEDPS)

RELAYS, SOLID-STATE

SECTION 1

INTRODUCTION

1.1 Scope

This dash-numbered part of the Automated Engineering Document Preparation System, MIL-STD-35, covers detailed requirements of Solid-State Relays.

1.2 Purpose

The purpose of this dash-numbered part of MIL-STD-35 is to provide a requester necessary information to properly prepare a request for a Solid-State Relay Military Specification Exception (MSE).

1.3 Format

The requester will find it impossible to complete an SRS using only this dash-numbered part of MIL-STD-35. Specification Requirements which are standard for all generic names have been included in the master document at the issuance of MIL-STD-35C. These specification requirements are not repeated in each dash-numbered part. The following list contains subjects from MIL-STD-35 which are pertinent to every dash-numbered part unless otherwise excepted.

General Description of AEDPS
Part Numbering
Specification Requirements Sheet
Writing Methodology
Mandatory Specification Requirements
General Specification Requirements
Dimensions and Drawings
Applicable Documents
Materials
Finishes
Inspections
Single and Multi-item Specifications (Tabulation)
Sources
Search
General Instructions for SRL
Tables

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.4 Military Specification, Exception Title Index

It is recommended that MIL-STD-1346, Relay, Selection and Application be reviewed prior to using MIL-STD-35-101(MI).

1.4.1 Title

The title of a generated MSE must be selected from one of the MSE titles listed in the Military Specification Exception Title Index (see 1.4.2). If a suitable MSE title is not found in the Index, a request should be forwarded to USAMICOM, ATTN: DRSMI-RCS, along with the desired title, and a related document. A code will be assigned and the code, title, and related document will be made a part of the Index. The requester will be notified of the assigned code.

One of the six-digit characteristic value codes, listed as Codes in the Index, entered on a Specification Requirements Sheet (SRS), will specify that the title of the MSE will be the title shown with that code in the Index.

Each MSE title listed in the Index is compatible with the document(s) listed with that title under Related Document. The list of related documents may or may not be a complete listing. The information contained under Related Document Coverage is intended for the requester's reference; when more than one document is listed for a MSE title, this information will be found useful in determining which of the documents is most suitable for use as the applicable general specification. When no document is listed under Related Document, exception may be taken to the most appropriate document listed in the Index under any other MSE title.

The MSE title may or may not be the same as the title used in DODISS, FIIG or the document to which the MSE document was written. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist a designer in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of devices. If the item selected from the AEDPS document becomes an item of supply, then the Cataloging Handbook H6 nomenclature must be used. Under each MSE title is the applicable FIIG Item Name Code from Cataloging Handbook H6 and the Federal Stock Class from the Standardization Directory (SD-1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Documents referenced in the MSE that will be listed in the Applicable Documents paragraph (2.1) of the MSE will be identified by the exact title that appears on the referenced document. Titles of MSE's, titles from DODISS, or titles from FIIG's will not be entered in paragraph 2.1.

1.4.2 Index

MSE Title: Relay, Solid-State — Code Ø21ØØ1
Federal Stock Class 5945
FIIG Item Name Code 31446

Related Document Number	Coverage
MIL-R-28750	Solid-State Relay General Specification

MSE Title: Relay, Telegraph, Solid-State — Code Ø21ØØ2
Federal Stock Class 5945
FIIG Item Name Code 31446

Related Document Number	Coverage
MIL-R-27777	Solid-State Telegraph Relays General Specification

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 2

APPLICABLE DOCUMENTS

The following documents form a part of this Standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-R-27777	Relays, Telegraph, Passive, Solid-State, General Specification for
MIL-R-28750	Relay, Solid-State, General Specification for

STANDARDS

MILITARY

MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-810	Environmental Test Methods
MIL-STD-1346	Relay Selection and Application

OTHER PUBLICATIONS

ASTM E380	Metric Practice Guide

(Copies of Standards and Handbooks required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 3

DEFINITIONS

Definitions contained in MIL-STD-35 are applicable to Solid-State Relays.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 4

GENERAL DESCRIPTION OF AEDPS

The general description of AEDPS contained in MIL-STD-35 is applicable to Solid-State Relays.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 5

DETAILED DESCRIPTION OF AEDPS

5.1 Introduction

The detailed description of AEDPS applicable to Solid-State Relays consists of the following:

a. The detailed description of AEDPS specified in MIL-STD-35.

b. The additional detailed description contained in this section.

5.2 Specification Requirement Sheet (SRS)

Specification Requirement Sheet (SRS) requirements described in MIL-STD-35 and at the end of this dash-numbered part are applicable to Solid-State Relays.

5.3 Specification Requirements

All specification requirements described in MIL-STD-35 are applicable to Solid-State Relays.

Refer to ASTM E380 for guidance in using the International System of Units (SI).

5.3.1 Mandatory Specification Requirements

In addition to the mandatory specification requirements of MIL-STD-35, some of the specification requirements described herein are mandatory and shall be entered on the SRS of each request for an MSE. If one or more of these mandatory characteristics are omitted from a request, one or more important details will not be included in the MSE.

Mandatory specification requirements consist of all those listed in MIL-STD-35 and the following:

CHARACTERISTICS	CHARACTERISTIC CODE
Poles, number	1565
Throws, number	1566
Control voltage	Table I
Contact voltage	Table I
Contact current	Table I

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.4 Code 1006 Requirements and Test Methods

Instructions for using "... per 1006 document" and "... per 1006 document except ___" requirements and test methods are explained in MIL-STD-35.

The test method per 1006 code and requirements per 1006 code from the same test shall not be used together. This condition would indicate no exception is being specified. If a test method code(s) has been selected, it is mandatory that a requirement code be selected; and if a requirement code has been selected, it is mandatory that a test method code(s) be selected.

5.5 Approved Item Name Code

The approved item name code to be entered on the SRS with Code 1007 for a Relay, Solid-State is selected from the following list:

APPROVED ITEM NAME	ITEM NAME CODE
Relay, Solid-State	31446
Unapproved Name	77777

Only the Item Name Code number is entered on the SRS with Code 1007.

5.6 Dimensions and Figures

All specification requirements for dimensions and figures described in MIL-STD-35 are applicable.

The figures applicable to Solid-State Relays are contained in Section 7. It is mandatory to enter on the SRS Code 1009 and a figure number.

5.7 Applicable Documents

The documents listed in the Applicable Document List of Section 5 of MIL-STD-35 and appropriate codes from Table B of MIL-STD-35 shall be entered on the SRS. In addition, the appropriate documents shown in the DOCUMENTS column below and the applicable codes from Table B of MIL-STD-35 shall be entered on the SRS when the codes listed in the CODES column are used to

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

specify tests or requirements. Shown parenthetically in the CODES column is a reference to the applicable test or requirement. A document designation, with a code from Table B, is entered on the SRS only once.

DOCUMENTS	CODES
MIL-R-27777	1657 (Closed-contact voltage drop and stability)
	1787 (Input current sensitivity)
	1802 (Input resistance)
	1817 (Isolation, overdrive and overload
	1847 (Open-contact resistance)
	1877 (Speed-distortion)
MIL-R-28750	1627 (Bias current)
	1682 (Crosstalk)
	1702 (Current rating)
	1722 (DC offset voltage)
	1742 (Electrical system spike)
	1827 (Leakage current)
	1862 (Power dissipation)
	1902 (Transient voltage)
	1937 (Turn-off time)
	1952 (Turn-off voltage)
	1967 (Turn-on time)
	1982 (Turn-on voltage)
	2002 (Waveform distortion)
MIL-STD-202	1375 (Terminal strength)
	1397 (Moisture resistance)
	1427 (Vibration, random)
	1447 (Vibration, high frequency)
	1467 (Vibration, low frequency)
	1500 (Shock, specified pulse)
	1511 (Insulation resistance)
	1642 (Capacitance)
	4672 (Solderability)
	4683 (Solderability)
	4698 (Resistance to soldering heat)
	4714 (Thermal shock)
	4732 (Seal)
	4771 (Salt spray)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

DOCUMENTS (Cont)	CODES (Cont)
MIL-STD-202 (Cont)	4839 (Resistance to solvents) 4862 (DWV - sea level) 6300 (DWV - reduced pressure) 6697 (Reliability screening)
MIL-STD-461	1780 (Electromagnetic interference)
MIL-STD-462	1772 (Electromagnetic interference)
MIL-STD-704	1914 (Transient voltage)
MIL-STD-810	1602 (Altitude) 6218 (Temperature, high) 6232 (Temperature, low)
Document to which exception is taken	1006

In addition, when the codes listed below are used to specify mounting or special preparations in accordance with a document, the document number with an appropriate code from Table B of MIL-STD-35 must be entered on the SRS.

1449 Moisture resistance, mounting
1520 Insulation resistance, preparation
4684 Shock, specified pulse, mounting
4707 Vibration, high frequency, mounting
4719 Thermal shock, mounting
4729 Vibration, low frequency, mounting
4773 Salt spray, mounting
4850 DWV, sea level, preparation
4859 DWV, reduced pressure, preparation
4975 Vibration, Random, mounting
5000 DWV, sea level, mounting
6267 DWV, sea level, voltage connections
6280 DWV, reduced pressure, mounting
6924 Reliability screening, mounting

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

For these codes any document from the Index, 1.4.3, may be used to specify which test in the document contains applicable mounting or preparation requirements, entered on the SRS the test name and the document number (Example 1).

CHAR CODE 13 14 15 16	CHARACTERISTIC VALUE 20 25 30 35 40 45 50
6924	MIL-R-27777, MOISTURE RESISTANCE#

EXAMPLE 1

Code 6924 in Example 1 specifies that the mounting in the Reliability Screening test shall be in accordance with the mounting in the Moisture Resistance Test of MIL-R-27777.

5.8 Tabulation

All specification requirements for tabulation described in MIL-STD-35 are applicable.

In addition to dimensions from Table A, characteristics in this dash-numbered part that are candidates for tabulation are contained in the following list. Table headings are shown as they will be printed in the MSE. Only characteristic codes from Table A and this list shall be entered on the SRS with codes from the Specification Requirement Sheet Tabulation Table of MIL-STD-35.

When different units of measure are shown for a specified parameter, only one may be tabulated. For example, where there are several codes which may be used to specify weight, each of which specifies a different unit of measure, only one code may be tabulated. However, equivalent U.S. or SI units of measure may be used for a specified parameter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABULATION CANDIDATES FOR SOLID-STATE RELAYS

TOP LINE	SECOND LINE	BOTTOM LINE	CODE
	POLES	(NUMBER)	1565
	THROWS	(NUMBER)	1566
MINIMUM	WEIGHT	(OUNCES)	1592
MAXIMUM	WEIGHT	(OUNCES)	1593
MINIMUM	WEIGHT	(GRAMS)	1594
MAXIMUM	WEIGHT	(GRAMS)	1595
RATED	CNTRL V	(VDC)	4000
RATED	CNTRL CUR	(MILLIA)	4003
RATED	BIAS V	(VDC)	4018
RATED	BIAS CUR	(MILLIA)	4021
RATED	CNTCT V	(VDC)	4024
RATED	CNTCT V	(VRMS)	4027
RATED	CNTCT V	(V PEAK)	4030
RATED	CNTCT CUR	(A)	4036

5.9 Electrical Characteristics

Table I (Section 8) provides the capability to specify the electrical design characteristics of a solid state relay. The mandatory electrical design characteristics are control voltage, contact voltage, and contact current.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC NAME	CHAR CODE 13 14 15 16	CHARACTERISTIC VALUE 20 25 30 35
	4001	4.0#
	4002	7.0#
	4003	22#
	4006	10#
	4015	15#
	4024	40#
	4027	40#
	4037	0#
	4038	0.05#

EXAMPLE 2

In Example 2, the minimum and maximum control voltage, rated control current, rated turn-on and turn-off time, rated DC and RMS contact voltage, and minimum and maximum contact current are specified as follows:

Code 4001 specifies the minimum control voltage shall be 4.0 volts dc; Code 4002 specifies the maximum control voltage shall be 7.0 volts dc; Code 4003 specifies the rated control current shall be 22 milliamperes; Code 4006 specifies the rated turn-on time shall be 10 microseconds; Code 4015 specifies the rated turn-off time shall be 15 microseconds; Code 4024 specifies the rated contact voltage shall be 40 volts dc; Code 4027 specifies the rated contact voltage shall be 40 volts rms; Code 4037 specifies the minimum contact current shall be 0.0 amperes; Code 4038 specifies the maximum contact current shall be 0.05 amperes.

The codes shown in Example 2 are used to specify the rated or the minimum and maximum values for the electrical characteristics. However, all codes applicable to an electrical characteristic may be used if required. Only one of the contact voltage codes is mandatory.

The remaining codes in Table I are used in a similar manner.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.10 Poles

There are two codes applicable to the relay poles, both are mandatory. The codes and information concerning them are as follows:

Code 1565 and a value, entered on the SRS, will specify the equivalent number of poles the characteristics of the relay shall exhibit.

Code 1566 and a value, entered on the SRS, will specify the equivalent number of throws the characteristics of the relay shall exhibit.

5.11 Pin Identification

The relay pins may be identified by the determination of their functions and by the use of applicable codes. The codes and information concerning them are as follows:

Code 1567 and a pin identification, entered on the SRS, will specify the identified pin shall be the control voltage input.

Code 1568 and a pin identification, entered on the SRS, will specify the identified pin shall be the common for the control voltage input.

Code 1569 and a pin identification, entered on the SRS, will specify the identified pin shall be the positive vias voltage.

Code 1570 and a pin identification, entered on the SRS, will specify the identified pin shall be the normally open load contact.

Code 1571 and a pin identification, entered on the SRS, will specify the identified pin shall be the common output for the pins identified with Codes 1570 and 1572.

Code 1572 and a pin identification, entered on the SRS, will specify the identified pin shall be the normally closed load contact.

Code 1573 and a pin identification, entered on the SRS, will specify the identified pin shall be the normally open load contact.

Code 1574 and a pin identification, entered on the SRS, will specify the identified pin shall be common output for the pins identified with Codes 1573 and 1575.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1575 and a pin identification, entered on the SRS, will specify the identified pin shall be the normally closed load contact.

5.12 Design and Construction

The design and construction codes are used as follows, none are mandatory.

Code 1580 and an "X", entered on the SRS, will specify the relay style shall be A. A relay style is specified only when MIL-R-27777 is used with Code 1006. Do not use Code 1580 with Code 1581 or 1582.

Code 1581 and an "X", entered on the SRS, will specify the relay style shall be B. A relay style is specified only when MIL-R-27777 is used with Code 1006. Do not use Code 1581 with Code 1580 or 1582.

Code 1582 and an "X", entered on the SRS, will specify the relay style shall be C. A relay style is specified only when MIL-R-27777 is used with Code 1006. Do not use Code 1582 with Code 1580 or 1581.

Code 1584 and an "X", entered on the SRS, will specify the relay base shall be an octal. Do not use Code 1584 with Code 1585, 1586, or 1587.

Code 1585 and an "X", entered on the SRS, will specify the relay base shall be a 255. Do not use Code 1585 with Code 1584, 1586, or 1587.

Code 1586 and an "X", entered on the SRS, will specify the relay base shall have wire leads. Do not use Code 1586 with Code 1584, 1585, or 1587.

Code 1587 and an "X", entered on the SRS, will specify the relay shall have a screw base. Do not use Code 1587 with Code 1584, 1585, or 1586.

Code 1588 and an "X", entered on the SRS, will specify the relay shall be glass-to-metal hermetically sealed. Do not use Code 1588 with Code 1589, 1590, or 1591.

Code 1589 and an "X", entered on the SRS, will specify the relay shall be metal-to-metal hermetically sealed. Do not use Code 1589 with Code 1588, 1590, or 1591.

Code 1590 and an "X", entered on the SRS, will specify the relay shall be ceramic-to-metal hermetically sealed. Do not use Code 1590 with Code 1588, 1589, or 1591.

Code 1591 and an "X", entered on the SRS, will specify the relay shall be encapsulated. Do not use Code 1591 with Code 1588, 1589, or 1590.

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:24Z
Check the source to verify that this is the current version before use.

5.13 Weight

Code 1592 and a value, entered on the SRS, will specify the minimum weight in ounces. Equivalent values must be entered when Code 1594 or 1595 is used with 1592.

Code 1593 and a value, entered on the SRS, will specify the maximum weight in ounces. Equivalent values must be entered when Code 1594 or 1595 is used with 1593.

Code 1594 and a value, entered on the SRS, will specify the minimum weight in grams. Equivalent values must be entered when Code 1592 or 1593 is used with Code 1594.

Code 1595 and a value, entered on the SRS, will specify the maximum weight in grams. Equivalent values must be entered when Code 1592 or 1593 is used with Code 1595.

5.14 Altitude Range

Code 5060 or Code 5061, or both and a value(s), entered on the SRS, will specify the operating altitude from sea level to the value specified in feet or metres, respectively.

Code 5062 or Code 5063, or both and a value(s), entered on the SRS, will specify the nonoperating altitude from sea level to the value specified in feet or metres, respectively.

5.15 Temperature Rating

Temperature ratings are specified by the use of the Temperature Rating Table. Codes selected from the table and a value, entered on the SRS, will cause the computer to generate the table and enter values in degrees Celsius in respective cells. Only those lines from which codes are used will print. Temperature less than zero (0) degrees Celsius shall be entered with a "-" sign, not the word minus. Only numbers are entered for positive temperatures; no "+" sign is required.

5.16 Design Reliability Rating

The Automated Engineering Document Preparation System (MIL-STD-35) is for use in generating procurement documents (Military Specification Exception, MSE) containing modified characteristics of an existing military document.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

The accumulation of several million unit-hours of testing necessary for verifying failure rate is usally not available, nor is it cost effective to require the verification testing. Therefore, MIL-STD-35 does not provide for specifying compliance to a failure rate level. Provision has been made for requiring that parts be designed and manufactured using designs, materials and manufacturing processes that have demonstrated compliance with a specified failure rate.

There are six codes applicable to design reliability rating. Three of the codes (7025, 7026, and 7029) are mandatory to specify this rating. Other codes are optional. Information concerning them is as follows:

Code 7025 and a value, entered on the SRS, will specify the failure rate in percent per 1000 hours for which the part is to be designed at the confidence level and conditions specified. Code 7026 and a value must be entered on the SRS when Code 7025 is entered.

Code 7026 and a value, entered on the SRS, will specify the confidence level percent.

Code 7030 and a value, entered on the SRS, will specify the percent of rated voltage applicable to the design reliability rating.

Code 7027 and a value, entered on the SRS, will specify the percent of rated load applicable to the design reliability rating.

Code 7028 and a value, entered on the SRS, will specify the percent of rated wattage, (not exceeding the rated voltage) applicable to the design reliability rating.

Code 7029 and a value, entered on the SRS, will specify the chamber temperature in degrees Celsius applicable to the design reliability rating.

5.17 Mounting Hardware

The codes in Table I of MIL-STD-35 are used to specify mounting hardware.

Code 6947 and an "X", entered on the SRS, will specify mounting hardware will be furnished with the unit, but not mounted.

Code 6948 and an "X", entered on the SRS, will specify hardware will be furnished mounted on the unit.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

5.18 Altitude

Code 1600 is the 1006 test code (5.4).

Code 1601 is the 1006 except test code (5.4).

To detail an altitude test, it is mandatory to use Code 1602. Other codes are optional.

Code 1602 and an "X", entered on the SRS, will specify the altitude test shall be performed in accordance with Method 500 of MIL-STD-810.

Code 1603 and a value, entered on the SRS, will specify the test procedure number required from method 500 of MIL-STD-810.

Code 1604 and a value, entered on the SRS, will specify the test temperature in degrees Celsius.

Code 1605 and a value, entered on the SRS, will specify the test temperature tolerance in plus or minus degrees Celsius.

Code 1606 and a value, entered on the SRS, will specify the equivalent test altitude in feet. Equivalent values must be used when Code 1607, 1608 or 1609 is used with Code 1606.

Code 1607 and a value, entered on the SRS, will specify the equivalent test altitude in metres. Equivalent values must be used when Code 1606, 1608 or 1609 is used with Code 1607.

Code 1608 and a value, entered on the SRS, will specify the test pressure in torr. Equivalent values must be used when Code 1606, 1607 or 1609 is used with Code 1608.

Code 1609 and a value, entered on the SRS, will specify the test pressure in kilopascals. Equivalent values must be used when Code 1606, 1607 or 1608 is used with Code 1609.

Code 1610 and a value, entered on the SRS, will specify the maximum rate of pressure change in torr per second. Equivalent values must be used when Code 1611 is used with Code 1610.

Code 1611 and a value, entered on the SRS, will specify the maximum rate of pressure change in kilopascals per second. Equivalent valves must be used when Code 1610 is used with Code 1611.

Code 1615 is the 1006 requirement code (5.4).

Code 1616 is the 1006 except requirement code (5.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

To detail altitude test requirements, it is mandatory to use Code 1617. Other codes are optional.

Code 1617 and an "X", entered on the SRS, will specify there shall be no erratic operation or malfunction.

Code 1618 and an "X", entered on the SRS, will specify the relay(s) shall remain within specified tolerance.

5.19 Bias Current

Code 1625 is the 1006 test code (5.4).

Code 1626 is the 1006 except test code (5.4).

To detail a bias current test, it is mandatory to use Code 1627. Other codes are optional.

Code 1627 and an "X", entered on the SRS, will specify the bias current test shall be performed in accordance with MIL-R-28750.

Code 1628 and a value, entered on the SRS, will specify the control voltage in volts.

Code 1629 and a value, entered on the SRS, will specify the bias voltage in volts.

Code 1630 and a value, entered on the SRS, will specify the contact voltage in volts.

Code 1631 and a value, entered on the SRS, will specify the contact current in amperes.

Code 1635 is the 1006 requirement code (5.4).

Code 1636 is the 1006 except requirement code (5.4).

Code 1637 and a value, entered on the SRS, will specify the maximum bias current in milliamperes.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

5.20 Capacitance

Code 1640 is the 1006 test code (5.4).

Code 1641 is the 1006 except test code (5.4).

To detail a capacitance test, it is mandatory to use Code 1642, 1643 and 1644. Other codes are optional.

Code 1642 and an "X", entered on the SRS, will specify the capacitance test shall be performed in accordance with Method 305 of MIL-STD-202. When Code 1642 is used, Code 1643 and 1644 must be used.

Code 1643 and a value, entered on the SRS, will specify the test frequency in kilohertz. When Code 1643 is used, Code 1644 and 1642 must be used.

Code 1644 and a value, entered on the SRS, will specify the plus or minus test frequency tolerance in kilohertz. When Code 1644 is used, Code 1643 and 1642 must be used.

Code 1645 and a value, entered on the SRS, will specify the test equipment accuracy in percent.

Code 1646 and a value, entered on the SRS, will specify the maximum test voltage in volts.

Code 1650 is the 1006 requirement code (5.4).

Code 1651 is the 1006 except requirement code (5.4).

Code 1652 and a value, entered on the SRS, will specify the maximum capacitance in picofarads.

5.21 Closed-contact Voltage Drop and Stability

Code 1655 is the 1006 test code (5.4).

Code 1656 is the 1006 except test code (5.4).

To detail a closed-contact voltage drop and stability test, it is mandatory to use Code 1657. Other codes are optional.

Code 1657 and an "X", entered on the SRS, will specify the test shall be performed in accordance with [illegible]

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1659 and a value, entered on the SRS, will specify the control voltage in volts.

Code 1660 and a value, entered on the SRS, will specify the control current in milliamperes.

Code 1661 and a value, entered on the SRS, will specify the contact voltage in volts.

Code 1663 and a value, entered on the SRS, will specify the minimum contact current in milliamperes.

Code 1664 and a value, entered on the SRS, will specify the maximum contact current in amperes.

Code 1666 and a value, entered on the SRS, will specify the contact current interruption duration in seconds.

Code 1670 is the 1006 requirement code (5.4).

Code 1671 is the 1006 except requirement code (5.4).

Code 1672 and a value, entered on the SRS, will specify the maximum contact voltage drop in volts.

Code 1673 and an "X", entered on the SRS, will specify the contact current shall remain constant.

Code 1674 and an "X", entered on the SRS, will specify the contact(s) shall remain closed when a constant current is applied to the input or control terminal(s).

5.22 Crosstalk

Code 1680 is the 1006 test code (5.4).

Code 1681 is the 1006 except test code (5.4).

To detail a crosstalk test, it is mandatory to use Code 1682. Other codes are optional.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1682 and an "X", entered on the SRS, will specify the crosstalk test shall be performed in accordance with MIL-R-28750.

Code 1683 and a value, entered on the SRS, will specify the paralleled capacitance in picofarads.

Code 1684 and a value, entered on the SRS, will specify the minimum input signal voltage in volts peak-to-peak.

Code 1685 and a value, entered on the SRS, will specify the maximum input signal voltage in volts peak-to-peak.

Code 1686 and a value, entered on the SRS, will specify the maximum input signal frequency in megahertz.

Code 1687 and a designation(s), entered on the SRS, will specify the measurement terminal(s).

Code 1690 is the 1006 requirement code (5.4).

Code 1691 is the 1006 except requirement code (5.4).

Code 1692 and a value, entered on the SRS, will specify the minimum attenuation in decibels.

5.23 Current Rating

Code 1700 is the 1006 test code (5.4).

Code 1701 is the 1006 except test code (5.4).

To detail a current rating test, it is mandatory to use Code 1702. Other codes are optional.

Code 1702 and an "X", entered on the SRS, will specify the current rating test shall be performed in accordance with MIL-R-28750.

Code 1703 and a value, entered on the SRS, will specify the control voltage in volts.

Code 1704 and a value, entered on the SRS, will specify the bias voltage in volts.

Code 1705 and a value, entered on the SRS, will specify the bias current in milliamperes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1706 and a value, entered on the SRS, will specify the contact voltage in volts.

Code 1707 and a value, entered on the SRS, will specify the minimum value of variable contact current in milliamperes.

Code 1708 and a value, entered on the SRS, will specify the maximum value of variable contact current in milliamperes.

Code 1710 is the 1006 requirement code (5.4).

Code 1711 is the 1006 except requirement code (5.4).

Code 1712 and an "X", entered on the SRS, will specify the dc offset voltage shall remain within specified limits for any contact current value.

Code 1713 and an "X", entered on the SRS, will specify the waveform distortion shall remain within specified limits for any contact current value.

5.24 DC Offset Voltage

Code 1720 is the 1006 test code (5.4).

Code 1721 is the 1006 except test code (5.4).

To detail a dc offset voltage test, it is mandatory to use Code 1722. Other codes are optional.

Code 1722 and an "X", entered on the SRS, will specify the dc offset voltage test shall be performed in accordance with MIL-R-28750.

Code 1723 and a value, entered on the SRS, will specify the control voltage in volts.

Code 1724 and a value, entered on the SRS, will specify the bias voltage in volts.

Code 1725 and a value, entered on the SRS, will specify the bias current in milliamperes.

Code 1726 and a value, entered on the SRS, will specify the contact voltage in volts.

Code 1727 and a value, entered on the SRS, will specify the contact current in milliamperes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1728 is the 1006 requirement code (5.4).

Code 1729 is the 1006 except requirement code (5.4).

Code 1730 and a value, entered on the SRS, will specify the maximum offset voltage in volts dc.

5.25 Dielectric Withstanding Voltage at Reduced Barometric Pressure

Code 4883 is the 1006 test code (5.4).

Code 4884 is the 1006 except test code (5.4).

To detail a dielectric withstanding voltage test at reduced barometric pressure, Codes 6300 and 4886, and either Code 4849 or 4885, are mandatory. Other codes are optional. Information concerning them is as follows:

Code 6300 and an "X", entered on the SRS, will specify the dielectric withstanding voltage test in accordance with Method 301 of MIL-STD-202 shall be performed at reduced barometric pressure.

Code 4886 and a letter, entered on the SRS, will specify the altitude shall be as specified by test condition letter from Method 105 of MIL-STD-202.

Code 4885 and a value, entered on the SRS, will specify dc test voltage. Do not use Code 4885 with Code 4849.

Code 4849 and a value, entered on the SRS, will specify ac test voltage. Do not use Code 4849 with Code 4885.

Code 6307 and a value, entered on the SRS, will specify the test frequency in hertz.

Code 6311 and an "X", entered on the SRS, will specify the test voltage shall be applied between terminations tied together and mounting hardware.

Code 6312 and an "X", entered on the SRS, will specify the test voltage shall be applied between terminations tied together and case.

Code 6292 and an "X", entered on the SRS, will specify that the dielectric withstanding voltage shall be applied between mutually insulated parts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 6293 and an "X", entered on the SRS, will specify that the dielectric withstanding voltage shall be applied between all insulated parts and ground.

Code 6294 and an "X", entered on the SRS, will specify that the dielectric withstanding voltage shall be applied between the current carrying parts and case.

Code 4859 and a document designation, entered on the SRS, will specify special preparations in accordance with the document (5.7).

Code 4891 and a value, entered on the SRS, will specify duration in seconds of voltage application. This code is used only if duration required is other than 60 seconds.

Code 6280 and a document designation, entered on the SRS, will specify mounting in accordance with the document (5.7).

Code 6308 and a value, entered on the SRS, will specify the required regulation of the test voltage in percent.

Code 4900 and a value, entered on the SRS, will specify the minimum kilovolt-ampere rating of the voltage source in kilovolt-amperes.

Code 4902 and a value, entered on the SRS, will specify the maximum surge current in amperes. Do not use Code 4902 with Code 6310.

Code 6310 and a value, entered on the SRS, will specify the maximum surge current in milliamperes. Do not use Code 6310 with Code 4902.

Code 4907 is the 1006 requirement code (5.4).

Code 4908 is the 1006 except requirement code (5.4).

To detail requirements, Code 4906 is mandatory and others are optional. Information concerning them is as follows:

Code 4906 and an "X", entered on the SRS, will specify there shall be no evidence of flashover, mechanical damage, arcing, or insulation breakdown after test.

Code 4894 and a value, entered on the SRS, will specify maximum leakage current in milliamperes.

Code 4901 and an "X", entered on the SRS, will specify the device shall remain within specified tolerance after test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.26 Dielectric Withstanding Voltage at Sea Level

Code 4860 is the 1006 test code (5.4).

Code 4861 is the 1006 except test code (5.4).

To detail a test method for dielectric withstanding voltage test at sea level, Code 4862 and either Code 4854 or 4855 are mandatory. Other codes are optional. Information concerning them is as follows:

Code 4862 and an "X", entered on the SRS, will specify to test in accordance with Method 301 of MIL-STD-202.

Code 4854 and a value, entered on the SRS, will specify test dc voltage. Do not use Code 4854 with Code 4855.

Code 4855 and a value, entered on the SRS, will specify test ac voltage. Do not use Code 4855 with Code 4854.

Code 4852 and a value, entered on the SRS, will specify the test frequency in hertz.

Code 4842 and an "X", entered on the SRS, will specify test voltage shall be applied between terminations tied together and mounting hardware.

Code 4848 and an "X", entered on the SRS, will specify test voltage shall be applied between terminations tied together and case.

Code 4844 and an "X", entered on the SRS, will specify that the dielectric withstanding voltage shall be applied between mutually insulated parts.

Code 4845 and an "X", entered on the SRS, will specify that the dielectric withstanding voltage shall be applied between all insulated parts and ground.

Code 4846 and an "X", entered on the SRS, will specify that the dielectric withstanding voltage shall be applied between current carrying parts and the case.

Code 4850 and a document designation, entered on the SRS, will specify special preparations in accordance with the document (5.7).

Code 4867 and a value, entered on the SRS, will specify duration in seconds of voltage application. This code is used only if duration required is other than 60 seconds.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

Code 5000 and a document designation, entered on the SRS, will specify mounting in accordance with the document (5.7).

Code 4869 and a value, entered on the SRS, will specify the required regulation of the test voltage in percent.

Code 4870 and a value, entered on the SRS, will specify the minimum kilovolt-ampere rating of the voltage source in kilovolt-amperes.

Code 4717 and a value, entered on the SRS, will specify the maximum surge current in amperes. Do not use Code 4717 with Code 4897.

Code 4897 and a value, entered on the SRS, will specify the maximum surge current in milliamperes. Do not use Code 4897 with Code 4717.

Code 6267 and a document designation, entered on the SRS, will specify that the method of voltage connection shall be in accordance with the document (5.7).

Code 4873 is the 1006 requirement code (5.4).

Code 4874 is the 1006 except requirement code (5.4).

To detail requirements for the dielectric withstanding voltage test at sea level, Code 4856 is mandatory; other codes are optional. Information concerning them is as follows:

Code 4856 and an "X", entered on the SRS, will specify there shall be no evidence of flashover, mechanical damage, arcing, or insulation breakdown after test.

Code 4875 and a value, entered on the SRS, will specify maximum leakage current in milliamperes.

Code 4847 and an "X", entered on the SRS, will specify the device shall remain within specified tolerance after test.

5.27 Electrical System Spike

Code 1740 is the 1006 test code (5.4).

Code 1741 is the 1006 except test code (5.4).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

To detail an electrical system spike test, it is mandatory to use Code 1742. Other codes are optional.

Code 1742 and an "X", entered on the SRS, will specify the electrical system spike test shall be performed in accordance with MIL-R-28750.

Code 1743 and a value, entered on the SRS, will specify the control voltage in volts.

Code 1744 and a value, entered on the SRS, will specify the bias voltage in volts.

Code 1745 and a value, entered on the SRS, will specify the bias current in milliamperes.

Code 1746 and a value, entered on the SRS, will specify the contact voltage in volts.

Code 1747 and a value, entered on the SRS, will specify the contact current in milliamperes.

Code 1748 and a value, entered on the SRS, will specify the minimum spike amplitude in volts.

Code 1749 and a value, entered on the SRS, will specify the number of spikes per second.

Code 1750 and a value, entered on the SRS, will specify the maximum spike width in microseconds.

Code 1751 and a value, entered on the SRS, will specify the duration, in minutes, for each polarity of applied spikes.

Code 1752 is the 1006 requirement code (5.4).

Code 1753 is the 1006 except requirement code (5.4).

To detail electrical system spike requirements, it is mandatory to use Code 1754. Other codes are optional.

Code 1754 and an "X", entered on the SRS, will specify there shall be no physical damage as a result of the test.

Code 1755 and an "X", entered on the SRS, will specify the relay(s) shall conform to the requirements of the turn-off time test upon completion of the electrical system spike test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1756 and an "X", entered on the SRS, will specify the relay(s) shall conform to the requirements of the turn-off voltage test upon completion of the electrical system spike test.

Code 1757 and an "X", entered on the SRS, will specify the relay(s) shall conform to the requirements of the turn-on time test upon completion of the electrical system spike test.

Code 1758 and an "X", entered on the SRS, will specify the relay(s) shall conform to the requirements of the turn-on voltage test upon completion of the electrical system spike test.

Code 1759 and an "X", entered on the SRS, will specify the relay(s) shall conform to the requirements of the input current sensitivity test upon completion of the electrical system spike test.

Code 1760 and an "X", entered on the SRS, will specify the relay(s) shall conform to the requirements of the leakage current test upon completion of the electrical system spike test.

Code 1761 and an "X", entered on the SRS, will specify the relay(s) shall conform to the requirements of the transient voltage test upon completion of the electrical system spike test.

Code 1762 and an "X", entered on the SRS, will specify the relay(s) shall conform to the requirements of the waveform distortion test upon completion of the electrical system spike test.

Code 1763 and an "X", entered on the SRS, will specify the relay(s) shall conform to the requirements of the power dissipation test upon completion of the electrical system spike test.

5.28 Electromagnetic Interference

Code 1770 is the 1006 test code (5.4).

Code 1771 is the 1006 except test code (5.4).

To detail an electromagnetic interference test, it is mandatory to use Code 1772. Other codes are optional.

Code 1772 and an "X", entered on the SRS, will specify the electromagnetic interference test shall be performed in accordance with MIL-STD-462.

Code 1773 and a valve, entered on the SRS, will specify the number of load steps. When Code 1773 is used, Code 1774 is mandatory.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

Code 1774 and a value, entered on the SRS, will specify the load per step in percent of the maximum load. When Code 1774 is used, Code 1773 is mandatory.

Code 1775 and a value, entered on the SRS, will specify the equipment class number.

Code 1776 and an "X", entered on the SRS, will specify the test measurements shall include conducted electromagnetic interference.

Code 1777 and an "X", entered on the SRS, will specify the test measurements shall include radiated electromagnetic interference.

Code 1778 is the 1006 requirement code (5.4).

Code 1779 is the 1006 except requirement code (5.4).

Code 1780 and an "X", entered on the SRS, will specify the requirements shall be in accordance with MIL-STD-461.

Code 1781 and an "X", entered on the SRS, will specify there shall be no adverse interference to adjacent equipment at any load step.

5.29 Input Current Sensitivity

Code 1785 is the 1006 test code (5.4).

Code 1786 is the 1006 except test code (5.4).

To detail an input current sensitivity test, it is mandatory to use Code 1787. Other codes are optional.

Code 1787 and an "X", entered on the SRS, will specify the input current sensitivity test shall be performed in accordance with MIL-R-27777.

Code 1789 and a value, entered on the SRS, will specify the contact current in milliamperes.

Code 1792 and a value, entered on the SRS, will specify the maximum input current in milliamperes.

Code 1793 and a value, entered on the SRS, will specify the bias voltage in volts.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

Code 1795 and a value, entered on the SRS, will specify the bias current in milliamperes.

Code 1797 is the 1006 requirement code (5.4).

Code 1798 is the 1006 except requirement code (5.4).

Code 1799 and a value, entered on the SRS, will specify the minimum input current in milliamperes to cause operation and nonoperation of the relay.

5.30 Input Resistance

Code 1800 is the 1006 test code (5.4).

Code 1801 is the 1006 except test code (5.4).

To detail an input resistance test, it is mandatory to use Code 1802. Other codes are optional.

Code 1802 and an "X", entered on the SRS, will specify the input resistance test shall be performed in accordance with MIL-R-27777.

Code 1803 and a value, entered on the SRS, will specify the input current in milliamperes.

Code 1805 and a value, entered on the SRS, will specify the input voltage in volts.

Code 1810 is the 1006 requirement code (5.4).

Code 1811 is the 1006 except requirement code (5.4).

Code 1812 and a value, entered on the SRS, will specify the maximum input resistance in ohms.

5.31 Insulation Resistance

Code 1370 is the 1006 test code (5.4).

Code 1371 is the 1006 except test code (5.4).

To detail an insulation resistance test, it is mandatory that Codes 1511 and Code 1378 or Code 1373 be entered on the SRS. Other codes are optional. Information concerning these codes is as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1511 and an "X", entered on the SRS, will specify the insulation resistance test method shall be as specified in Method 302 of MIL-STD-202.

Code 1378 and a letter, entered on the SRS, will specify the applicable test condition letter from Method 302 of MIL-STD-202.

Code 1373 and a value, entered on the SRS, will specify the test voltage in volts dc.

Code 1376 and a value, entered on the SRS, will specify the electrification time in seconds if other than two minutes.

Code 1377 and a value, entered on the SRS, will specify the maximum measurement error in percent permitted at the insulation resistance value required if other than 10 percent.

Code 1497 and an "X", entered on the SRS, will specify the points of application of test voltage shall be between terminations tied together and mounting hardware.

Code 1498 and an "X", entered on the SRS, will specify the points of application of test voltage shall be between terminations tied together and case.

Code 1522 and an "X", entered on the SRS, will specify that insulation resistance shall be measured between mutually insulated parts.

Code 1523 and an "X", entered on the SRS, will specify that insulation resistance shall be measured between all insulated parts and ground.

Code 1524 and an "X", entered on the SRS, will specify that insulation resistance shall be measured between current carrying parts and the case.

Code 1520 and a document designation, entered on the SRS, will specify special preparations, or conditions, shall be in accordance with the designated document (5.7).

Code 1372 and a value, entered on the SRS, will specify the test temperature in degrees Celsius if other than as specified in MIL-STD-202 standard test conditions, or the first test temperature if the insulation resistance test is to be performed at two temperatures.

Code 1381 and a value, entered on the SRS, will specify the second test temperature in degrees Celsius when the insulation resistance test is to be performed at two temperatures.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1383 and a value, entered on the SRS, will specify plus or minus test temperature tolerance in degrees Celsius.

Code 1379 is the 1006 requirement code (5.4).

Code 1380 is the 1006 except requirement code (5.4).

To detail requirements, Code 1407 is mandatory. Other codes are optional.

Code 1407 and an "X", entered on the SRS, will specify that there shall be no evidence of physical damage.

Code 1386 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms when no temperature is specified with Codes 1372 or 1381.

Code 1384 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms at the first test temperature specified with Code 1372.

Code 1387 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms at the second test temperature specified with Code 1381.

Code 1388 and an "X", entered on the SRS, will specify the device shall remain within specified tolerance.

5.32 Isolation (Overdrive and Overload)

Code 1815 is the 1006 test code (5.4).

Code 1816 is the 1006 except test code (5.4).

To detail an isolation (overdrive and overload) test, it is mandatory to use Code 1817 or Table II.

Code 1817 and an "X", entered on the SRS, will specify the isolation (overdrive and overload) test shall be performed in accordance with MIL-R-27777.

Use Table II, isolation (overdrive and overload), to specify the test shall be performed in accordance with the table. Table II is used as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 4100 and a value, entered on the SRS, will specify the input current in milliamperes.

Code 4101 and a value, entered on the SRS, will specify the input voltage in volts.

Code 4102 and a value, entered on the SRS, will specify the control current in milliamperes.

Code 4103 and a value, entered on the SRS, will specify the control voltage in volts.

Code 4104 and a value, entered on the SRS, will specify the input level interval in seconds.

Code 4105 and a designation, entered on the SRS, will specify one of the terminal designations for the isolation resistance measurements.

Code 4106 and a designation, entered on the SRS, will specify the second terminal designation for the isolation resistance measurements.

Code 4107 and a value, entered on the SRS, will specify the minimum isolation resistance in megohms.

The remaining codes in Table II are used in a similar manner.

Code 1818 is the 1006 requirement code (5.4).

Code 1819 is the 1006 except requirement code (5.4).

To detail isolation (overdrive and overload) requirements, it is mandatory to use Code 1820.

Code 1820 and an "X", entered on the SRS, will specify the isolation (overdrive and overload) test requirements shall be as specified in Table II.

5.33 Leakage Current

Code 1825 is the 1006 test code (5.4).

Code 1826 is the 1006 except test code (5.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

To detail a leakage current test, it is mandatory to use Code 1827. Other codes are optional.

Code 1827 and an "X", entered on the SRS, will specify the leakage current test shall be performed in accordance with MIL-R-28750.

Code 1828 and a value, entered on the SRS, will specify the test temperature in degrees Celsius.

Code 1829 and a value, entered on the SRS, will specify the test temperature tolerance in plus or minus degrees Celsius.

Code 1830 and a value, entered on the SRS, will specify the first value of the contact voltage in volts.

Code 1831 and a value, entered on the SRS, will specify the second value of the contact voltage in volts.

Code 1832 and a value, entered on the SRS, will specify the bias current in milliamperes.

Code 1833 is the 1006 requirement code (5.4).

Code 1834 is the 1006 except requirement code (5.4).

Code 1835 and a value, entered on the SRS, will specify the maximum open contact leakage current in microamperes at the contact voltage specified with Code 1830.

Code 1836 and a value, entered on the SRS, will specify the maximum open contact leakage current in microamperes at the contact voltage specified with Code 1831.

Code 1837 and a value, entered on the SRS, will specify the maximum closed contact leakage current in microamperes at the contact voltage specified with Code 1830.

Code 1838 and a value, entered on the SRS, will specify the maximum closed contact leakage current in microamperes at the contact voltage specified with Code 1831.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.34 Moisture Resistance

Code 1390 is the 1006 test code (5.4).

Code 1391 is the 1006 except test code (5.4).

To detail a moisture resistance test, Code 1397 is mandatory. Other codes are optional. These codes and information concerning them is as follows:

Code 1397 and an "X", entered on the SRS, will specify to test in accordance with Method 106 of MIL-STD-202.

Code 4981 and a value, entered on the SRS, will specify the loading voltage dc. Do not use Code 4981 with Code 4980.

Code 4980 and a value, entered on the SRS, will specify the loading voltage ac. Do not use Code 4980 with Code 4981.

Code 4985 and an "X", entered on the SRS, will specify Step 7a of Method 106 of MIL-STD-202 is not applicable.

Code 4986 and an "X", entered on the SRS, will specify Step 7b of Method 106 of MIL-STD-202 is not applicable.

Code 1449 and a document designation, entered on the SRS, will specify mounting in accordance with the document (5.7).

Code 4983 and an "X", entered on the SRS, will specify the dielectric withstanding voltage test at sea level shall be performed at high humidity.

Code 4984 and an "X", entered on the SRS, will specify the dielectric withstanding voltage test at sea level shall be performed after drying.

Code 2050 and an "X", entered on the SRS, will specify the closed contact voltage drop and stability test shall be performed after the drying period.

Code 2051 and an "X", entered on the SRS, will specify the leakage current that shall be performed after the drying period.

Code 2052 and an "X", entered on the SRS, will specify the turn-off voltage test shall be performed after the drying period.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 2053 and an "X", entered on the SRS, will specify the turn-on voltage test shall be performed after the drying period.

Code 1399 is the 1006 requirement code (5.4).

Code 1400 is the 1006 except requirement code (5.4).

To detail requirements, Code 1396 is mandatory. Other codes are optional. Information concerning them is as follows:

Code 1396 and an "X", entered on the SRS, will specify no evidence of corrosion or physical damage.

Code 1398 and an "X", entered on the SRS, will specify the device shall remain within specified tolerance.

Code 1394 and an "X", entered on the SRS, will specify there shall be no evidence of flashover, arcing, or insulation breakdown when the dielectric withstanding voltage test at sea level is performed.

Code 1429 and a value, entered on the SRS, will specify the maximum leakage current in milliamperes when dielectric withstanding voltage test at sea level is performed at high humidity.

Code 1404 and a value, entered on the SRS, will specify the maximum leakage current in milliamps when dielectric withstanding voltage test at sea level is performed after drying.

Code 1432 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms when measured at high humidity.

Code 1406 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms when measured after drying.

Code 2060 and a value, entered on the SRS, will specify the maximum contact voltage drop in volts after drying.

Code 2061 and a value, entered on the SRS, will specify the maximum leakage current in microamperes after drying.

Code 2062 and a value, entered on the SRS, will specify the minimum turn-off voltage in volts after drying.

Code 2063 and a value, entered on the SRS, will specify the maximum turn-on voltage in volts after drying.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

5.35 Open-Contact Resistance

Code 1845 is the 1006 test code (5.4).

Code 1846 is the 1006 except test code (5.4).

To detail an open-contact resistance test, it is mandatory to use Code 1847. Other codes are optional.

Code 1847 and an "X", entered on the SRS, will specify the open-contact resistance test shall be performed in accordance with MIL-R-27777.

Code 1848 and a value, entered on the SRS, will specify the test temperature in degrees Celsius.

Code 1849 and a value, entered on the SRS, will specify the test temperature tolerance in plus or minus degrees Celsius.

Code 1850 and a value, entered on the SRS, will specify the first test voltage in volts dc.

Code 1851 and a value, entered on the SRS, will specify the second test voltage in volts dc.

Code 1852 and a value, entered on the SRS, will specify the equipment accuracy in percent.

Code 1853 is the 1006 requirement code (5.4).

Code 1854 is the 1006 except requirement code (5.4).

Code 1855 and a value, entered on the SRS, will specify the minimum open-contact resistance in megohms.

Code 1856 and a value, entered on the SRS, will specify the maximum leakage current in microamperes at the test voltage specified with Code 1850.

Code 1857 and a value, entered on the SRS, will specify the maximum leakage current in microamperes at the test voltage specified with Code 1851.

5.36 Power Dissipation

Code 1860 is the 1006 test code (5.4).

Code 1861 is the 1006 except test code (5.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

To detail a power dissipation test, it is mandatory to use Code 1862. Other codes are optional.

Code 1862 and an "X", entered on the SRS, will specify the power dissipation test shall be performed in accordance with MIL-R-28750.

Code 1863 and a value, entered on the SRS, will specify the control voltage in volts.

Code 1864 and a value, entered on the SRS, will specify the bias voltage in volts.

Code 1865 and a value, entered on the SRS, will specify the contact voltage in volts.

Code 1866 and a value, entered on the SRS, will specify the contact current in milliamperes.

Code 1867 is the 1006 requirement code (5.4).

Code 1868 is the 1006 except requirement code (5.4).

Code 1869 and a value, entered on the SRS, will specify the maximum power dissipation in watts.

5.37 Reliability Screen (Burn-In, Aging, Conditioning, Stabilization, Load Life, Overload)

The established reliability military specifications, Group A inspection, include tests that are designed to apply appropriate stresses and inspections at a level which will not jeopardize usage or shorten the life of acceptable parts, but which will reveal defects and accelerate failure mechanisms that are detectable by inspection or parameter measurement. This stress testing is entitled voltage aging, conditioning, voltage conditioning, high voltage stabilization, overload, load-life, burn-in, etc., in the various specifications. For the purposes of MIL-STD-35, the term "Reliability Screening" has been chosen to encompass all the above titles. The voltage code can be assigned a value of zero to affect a bake. The temperature code can be assigned a value of 25 degrees Celsius to affect a voltage stabilization.

Code 6695 is the 1006 test code (5.4).

Code 6696 is the 1006 except test code (5.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

To detail a reliability screening test, Code 6697 is mandatory; either Code 6698 or 6699, and 6710 or 6713 are mandatory; Codes 6700 and 6701 are mandatory and other codes are optional. Information concerning them is as follows:

Code 6697 and an "X", entered on the SRS, will specify to test in accordance with Method 108 of MIL-STD-202.

Code 6698 and a letter, entered on the SRS, will specify the test condition letter which specifies duration shall apply. Do not use Code 6698 with Code 6699.

Code 6699 and a value, entered on the SRS, will specify the test duration in hours. Do not use Code 6699 with Code 6698.

Code 6710 and an "X", entered on the SRS, will specify that power shall be applied for 1.5 hours, and off for 0.5 hours. Do not use Code 6710 with Code 6713.

Code 6713 and an "X", entered on the SRS, will specify that power shall be applied continuously for the duration of the test.

Code 6700 and a value, entered on the SRS, will specify the test temperature in degrees Celsius.

Code 6701 and a value, entered on the SRS, will specify the plus or minus temperature tolerance in degrees Celsius.

Code 6023 and an "X", entered on the SRS, will specify the device shall be mounted such that the temperature of one does not influence the temperature of any other device and there shall be no undue draft on the device.

Code 6921 and a value, entered on the SRS, will specify the power applied as number of times rated power. Use Code 6939 to limit the voltage when required.

Code 6939 and a value, entered on the SRS, will specify the maximum voltage to be applied. Refer to Code 6921 for direction as to when this code is applicable.

Code 6706 and a value, entered on the SRS, will specify the volts ac to be applied during the screening test.

Code 6707 and a value, entered on the SRS, will specify the volts dc to be applied during the screening test.

Code 6920 and a value, entered on the SRS, will specify the output load in ohms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 6922 and a value, entered on the SRS, will specify the measurement interval in hours at which measurements are to be taken.

Code 6924 and a document designation, entered on the SRS, will specify mounting shall be in accordance with the document. The test name applicable shall be entered in addition to the document designation (5.7).

Code 6928 is the 1006 requirement code (5.4).

Code 6929 is the 1006 except requirement code (5.4).

To detail requirements, Code 6930 and an "X", entered on the SRS, will specify no evidence of physical damage. This code is mandatory when requirements are to be detailed after the reliability screening test.

Code 6937 and an "X", entered on the SRS, will specify the device shall remain within specified tolerance.

Code 2065 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the turn-off time test.

Code 2066 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the turn-off voltage test.

Code 2067 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the turn-on time test.

Code 2068 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the turn-on voltage test.

Code 2069 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the input current sensitivity test.

Code 2070 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the leakage current test.

Code 2071 and an "X", entered on the SRS, will specify the relays shall comform to the requirements of the transient voltage test.

Code 2072 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the waveform distortion test.

Code 2073 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the power dissipation test.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

5.38 Resistance to Soldering Heat

Code 4688 is the 1006 test code (5.4).

Code 4689 is the 1006 except test code (5.4).

To detail a resistance to soldering heat test, it is mandatory to use Codes 4698 and 4691. Other codes are optional.

Code 4698 and an "X", entered on the SRS, will specify to test in accordance with Method 210 of MIL-STD-202.

Code 4691 and a letter, entered on the SRS, will specify the quantity of terminations on each device to be tested. This code is only used when all terminations are not tested.

Code 4692 and a value, entered on the SRS, will specify the depth in inches of immersion in solder.

Code 4669 and a value, entered on the SRS, will specify the depth in millimetres of immersion in solder.

Code 4671 and an "X", entered on the SRS, will specify immersion in flux prior to immersion in solder is permitted.

Code 4989 and an "X", entered on the SRS, will specify that special preparations are permitted, such as lead straightening or orientation.

Code 4695 and a value, entered on the SRS, will specify the cooling time in minutes before final measurements are made.

Code 4699 is the 1006 requirement code (5.4).

Code 4700 is the 1006 except requirement code (5.4).

Code 4701 and an "X", entered on the SRS, will specify no evidence of physical damage. This code is mandatory when requirements are to be detailed after the resistance to soldering heat test.

Code 4718 and an "X", entered on the SRS, will specify the device shall remain within specified tolerance.

Code 4721 and an "X", entered on the SRS, will specify that there shall be no degradation of performance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.39 Resistance to Solvents

Code 4828 is the 1006 test code (5.4).

Code 4829 is the 1006 except test code (5.4).

To detail a resistance to solvents test, Code 4839 is mandatory. Other codes are optional.

Code 4839 and an "X", entered on the SRS, will specify to test in accordance with Method 215 of MIL-STD-202.

Code 4838 and a chemical name(s), entered on the SRS, will specify additional solvent(s) to which the parts shall be subjected.

Code 4835 and a letter(s), entered on the SRS, will specify which solvent solutions shown with the subparagraph letter(s) in Method 215 of MIL-STD-202 shall be not used.

Code 4831 and an "X", entered on the SRS, will specify the marking area shall be brushed.

Code 6279 and an "X", entered on the SRS, will specify all surfaces of the device shall be brushed.

Code 4833 is the 1006 requirement code (5.4).

Code 4834 is the 1006 except requirement code (5.4).

Code 4830 and an "X", entered on the SRS, will specify there shall be no evidence of physical damage or degradation of performance. To detail requirements, this code is mandatory.

Code 4836 and an "X", entered on the SRS, will specify that marking shall remain legible after subjection to the solvents specified.

5.40 Salt Spray

Code 4769 is the 1006 test code (5.4).

Code 4770 is the 1006 except test code (5.4).

To detail a salt spray test, Codes 4771 and 4772 are mandatory.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 4771 and an "X", entered on the SRS, will specify to test in accordance with Method 101 of MIL-STD-202.

Code 4772 and a test condition letter, entered on the SRS, will specify the test condition letter entered shall apply.

Code 4773 and a document designation, entered on the SRS, will specify that special mounting shall be in accordance with the document. The applicable test name from the referenced document shall be entered on the SRS in addition to the document designation (5.7).

Code 4765 and an "X", entered on the SRS, will specify that mounting shall be by normal mounting means.

Code 4766 and an "X", entered on the SRS, will specify that any suitable means of mounting may be used.

Code 4877 is the 1006 requirement code (5.4).

Code 4878 is the 1006 except requirement code (5.4).

Code 4782 and an "X", entered on the SRS, will specify no evidence of corrosion, physical damage or degradation of performance.

Code 2074 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the insulation resistance test.

Code 2075 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the dielectric withstanding voltage at sea level test.

Code 2076 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the turn-off time test.

Code 2077 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the turn-off voltage test.

Code 2078 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the turn-on time test.

Code 2079 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the turn-on voltage test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 2080 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the input current sensitivity test.

Code 2081 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the leakage current test.

Code 2082 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the transient voltage test.

Code 2083 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the waveform distortion test.

Code 2084 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the power dissipation test.

5.41 Seal

Code 4733 is the 1006 test code (5.4).

Code 4734 is the 1006 except test code (5.4).

To detail a seal test, Codes 4732 and a test condition letter code are mandatory. Other codes are optional unless test condition letter C is specified. If test condition letter C is used, leak rate sensitivity and a procedure number must be specified also.

Code 4732 and an "X", entered on the SRS, will specify to test in accordance with Method 112 of MIL-STD-202.

Code 4737 and a letter A, entered on the SRS, will specify that test condition letter A shall apply.

If test condition letter A is specified, Codes 4738 or 4739, or both, may be used if exception to the parameters in the specified test condition letter are required. These codes and information concerning them are as follows:

Code 4738 and a media name, entered on the SRS, will specify the media to be used for the immersion bath.

Code 4739 and a value, entered on the SRS, will specify the minimum media bath temperature in degrees Celsius.

Code 6320 and a letter B, entered on the SRS, will specify that test condition letter B shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

If test condition letter B is specified, Codes 6321 or 6322, or both, may be used if exception to the parameters in the specified test condition letter are required. These codes and information concerning them are as follows:

Code 6321 and a media name, entered on the SRS, will specify the media to be used for the immersion bath.

Code 6322 and a value, entered on the SRS, will specify the minimum media bath temperature in degrees celsius.

Code 6323 and a letter C, entered on the SRS, will specify that test condition letter C shall apply.

If test condition letter C is specified, Code 4741 and a procedure number code are mandatory. Other codes are optional. Information concerning them is as follows:

Code 4741 and a value, entered on the SRS, will specify the leak rate sensitivity setting in atm cm^3/s for the applicable leak detector in accordance with the procedure specified.

Code 4740 and a Roman numeral I, entered on the SRS, will specify that procedure I as specified in test condition letter C, Method 112 of MIL-STD-202 shall apply.

Code 4742 or 4736, or both and a value(s), entered on the SRS, will specify the backfill pressure in pounds per square inch or kilopascals, respectively.

Code 6324 and a Roman numeral II, entered on the SRS, will specify that procedure II as specified in test condition letter C, Method 112 of MIL-STD-202 shall apply.

Code 6325 or 6326, or both and a value(s), entered on the SRS, will specify the backfill pressure in pounds per square inch or kilopascals, respectively.

Code 4749 and a number, entered on the SRS, will specify the number of pressure cycles applicable to procedure II of test condition letter C when pressure cycling is required.

Code 6328 and a Roman numeral III, entered on the SRS, will specify that procedure III as specified in test condition letter C, Method 112 of MIL-STD-202 shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 4750 and a letter, entered on the SRS, will specify the gross leak test condition letter applicable after completion of procedure III, test condition C, Method 112 of MIL-STD-202.

Code 6329 and a Roman numeral IV, entered on the SRS, will specify that procedure IV as specified in test condition letter C, Method 112 of MIL-STD-202 shall apply.

Code 4751 and a value, entered on the SRS, will specify the pressure in torr to which the chamber is to be evacuated for procedure IV of test condition C, Method 112 of MIL-STD-202.

Code 4735 and a value, entered on the SRS, will specify the pressure in kilopascals to which the chamber is to be evacuated for procedure IV, test condition C, Method 112 of MIL-STD-202.

Code 4752 and a value, entered on the SRS, will specify the duration in minutes of reduced pressure for procedure IV, test condition C, Method 112 of MIL-STD-202.

Code 6330 and a letter, entered on the SRS, will specify the gross leak test condition letter applicable after completion of procedure IV, test condition C, Method 112 of MIL-STD-202.

Code 6331 and a letter D, entered on the SRS, will specify that test condition letter D shall apply.

Code 4743 and an "X", entered on the SRS, will specify any suitable mounting fixture may be used for test condition letter D, Method 112 of MIL-STD-202.

Code 6332 and a letter E, entered on the SRS, will specify that test condition letter E shall apply.

Code 6333 and an "X", entered on the SRS, will specify any suitable mounting fixture may be used for test condition letter E, Method 112 of MIL-STD-202.

Code 4744 is the 1006 requirement code (5.4).

Code 4745 is the 1006 except requirement code (5.4).

Code 4746 and an "X", entered on the SRS, will specify the leak rate measured shall be not greater than the leak rate sensitivity specified. This code is intended for use when test condition letter C is specified, but may be used with any test condition letter, Method 112 of MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 4748 and an "X", entered on the SRS, will specify there shall be no bubbles indicative of leakage. This code is applicable to all test condition letters.

5.42 Shock, Specified Pulse

Code 1501 is the 1006 test code (5.4).

Code 1502 is the 1006 except test code (5.4).

To detail a specified pulse shock test, it is mandatory to use Codes 1500 and 1504. Other codes are optional.

Code 1500 and an "X", entered on the SRS, will specify to test in accordance with Method 213 of MIL-STD-202.

Code 1504 and a letter, entered on the SRS, will specify the applicable test condition letter from Method 213 of MIL-STD-202.

There are three codes to specify mounting. Only one of these codes may be used. Information concerning them is as follows:

Code 4686 and an "X", entered on the SRS, will specify mounting shall be by any suitable method.

Code 4685 and an "X", entered on the SRS, will specify mounting shall be by normal mounting means.

Code 4684 and a document designation, entered on the SRS, will specify mounting shall be in accordance with the document. The applicable test name from the reference document shall be entered on the SRS in addition to the document designation (5.7).

Code 6204 and a value, entered on the SRS, will specify the percent of rated load to be applied during shock testing.

Code 1507 is the 1006 requirement code (5.4).

Code 1508 is the 1006 except requirement code (5.4).

To detail requirements, Code 1509 is mandatory. Other codes are optional. Information concerning them is as follows:

Code 1509 and an "X", entered on the SRS, will specify no evidence of physical damage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1471 and an "X", entered on the SRS, will specify there shall be no discontinuity during the test.

Code 4703 and an "X", entered on the SRS, will specify the device shall remain within specified tolerance.

Code 2085 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the insulation resistance test.

Code 2086 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the dielectric withstanding voltage at sea level test.

Code 2087 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the turn-off time test.

Code 2088 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the turn-off voltage test.

Code 2089 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the turn-on time test.

Code 2090 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the turn-on voltage test.

Code 2091 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the input current sensitivity test.

Code 2092 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the leakage current test.

Code 2093 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the transient voltage test.

Code 2094 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the waveform distortion test.

Code 2095 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the power dissipation test.

5.43 Solderability

Code 4661 is the 1006 test code (5.4).

Code 4662 is the 1006 except test code (5.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

To detail a solderability test, it is mandatory to use Code 4683. Other codes are optional.

Code 4683 and an "X", entered on the SRS, will specify to test in accordance with Method 208 of MIL-STD-202.

Code 4666 and a value (quantity), entered on the SRS, will specify the quantity of terminations on each device to be tested. This code is only used when all terminations are not tested.

Code 4667 and a value, entered on the SRS, will specify the depth in inches of immersion in flux and solder. This code and value are entered when the required depth of immersion is to be other than to within 0.05 inch of the body.

Code 4663 and a value, entered on the SRS, will specify the depth in millimetres of immersion in flux and solder.

Code 4664 and a value, entered on the SRS, will specify the standard wrap wire, as defined in Method 208 of MIL-STD-202, is to be wrapped this number of inches from the body of the device.

Code 4665 and a value, entered on the SRS, will specify the standard wrap wire, as defined in Method 208 of MIL-STD-202, is to be wrapped this number of millimetres from the body of the device.

Code 6205 and an "X", entered on the SRS, will specify that special preparations are permitted, such as lead straightening or orientation.

Code 4673 is the 1006 requirement code (5.4).

Code 4674 is the 1006 except requirement code (5.4).

Code 4675 and an "X", entered on the SRS, will specify no evidence of physical damage. This code is mandatory when requirements are detailed. Other codes are optional.

Code 4672 and an "X", entered on the SRS, will specify the device shall meet the evaluation criteria specified in Method 208 of MIL-STD-202.

Code 4677 and an "X", entered on the SRS, will specify the device shall remain within specified tolerance.

Source: https://assist.dla.mil -- Downloaded: 20260410-26T07:24Z
Check the source to verify that this is the current version before use.

5.44 Speed-Distortion

Code 1875 is the 1006 test code (5.4).

Code 1876 is the 1006 except test code (5.4).

To detail a speed-distortion test, it is mandatory to use Code 1877. Other codes are optional.

Code 1877 and an "X", entered on the SRS, will specify the speed-distortion test shall be performed in accordance with MIL-R-27777.

Code 1878 and a value, entered on the SRS, will specify the minimum test speed in bauds.

Code 1879 and a value, entered on the SRS, will specify the maximum test pulse width distortion in percent at minimum speed.

Code 1880 and a value, entered on the SRS, will specify the maximum test speed in bauds.

Code 1881 and a value, entered on the SRS, will specify the minimum test pulse width distortion in percent at maximum speed.

Code 1882 and a value, entered on the SRS, will specify the test pulse duty cycle in percent.

Code 1883 and a value, entered on the SRS, will specify the control voltage in volts dc.

Code 1884 and a value, entered on the SRS, will specify the neutral output voltage in volts dc.

Code 1885 and a value, entered on the SRS, will specify the polar voltage in volts dc.

Code 1886 and a value, entered on the SRS, will specify the first input current in milliamperes.

Code 1887 and a value, entered on the SRS, will specify the output current in milliamperes at the input current specified with Code 1886.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1888 and a value, entered on the SRS, will specify the second input current in milliamperes.

Code 1889 and a value, entered on the SRS, will specify the output current in milliamperes at the input current specified with Code 1888.

Code 1890 and a value, entered on the SRS, will specify the third input current in milliamperes.

Code 1891 and a value, entered on the SRS, will specify the output current in milliamperes at the input current specified with Code 1890.

Code 1892 and a value, entered on the SRS, will specify the speed-distortion test circuit figure number.

Code 1893 and a description, entered on the SRS, will specify the exceptions to the speed-distortion test circuit specified with Code 1892.

Code 1894 is the 1006 requirement code (5.4).

Code 1895 is the 1006 except requirement code (5.4).

Code 1896 and an "X", entered on the SRS, will specify the relay(s) shall operate correctly at maximum specified bauds.

Code 1897 and a value, entered on the SRS, will specify the maximum distortion at any speed in percent.

5.45 Temperature, High

Code 6216 is the 1006 test code (5.4).

Code 6217 is the 1006 except test code (5.4).

To detail a high temperature test, it is mandatory to use codes 6218 and 6219. Other codes are optional.

Code 6218 and an "X", entered on the SRS, will specify to test in accordance with Method 501 of MIL-STD-810.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 6219 and a Roman numeral, entered on the SRS, will specify the applicable procedure number.

Code 6220 and a value, entered on the SRS, will specify the storage temperature in degrees Celsius. This code is only used when a temperature other than 71 degrees Celsius is required.

Code 6221 and a value, entered on the SRS, will specify the duration in hours of the high temperature storage. This code is only used when a storage other than 48 hours is required.

Code 6222 and a value, entered on the SRS, will specify the highest operating temperature in degrees Celsius at which the device under test is designed to operate.

Code 6224 and a value, entered on the SRS, will specify the operating time in minutes at the temperature specified with Code 6222. Do not use Code 6224 with Code 6225.

Code 6225 and a value, entered on the SRS, will specify the operating time in hours at the temperature specified with Code 6222. Do not use Code 6225 with Code 6224.

Code 6227 is the 1006 requirement code (5.4).

Code 6228 is the 1006 except requirement code (5.4).

To detail high temperature requirements, it is mandatory to use Code 6229.

Code 6229 and an "X", entered on the SRS, will specify there shall be no evidence of physical damage after exposure to high temperature.

Code 2096 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the insulation resistance test.

Code 2097 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the dielectric withstanding voltage at sea level test.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

Code 2098 and a "X", entered on the SRS, will specify the relays shall conform to the requirements of the turn-off time test.

Code 2099 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the turn-off voltage test.

Code 2100 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the turn-on time test.

Code 2101 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the turn-on voltage test.

Code 2102 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the input current sensitivity test.

Code 2103 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the leakage current test.

Code 2104 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the transient voltage test.

Code 2105 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the waveform distortion test.

Code 2106 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the power dissipation test.

5.46 Temperature, Low

Code 6230 is the 1006 test code (5.4).

Code 6231 is the 1006 except test code (5.4).

To detail a low temperature test, it is mandatory to use Code 6232. Other codes are optional.

Code 6232 and an "X", entered on the SRS, will specify to test in accordance with Method 502 of MIL-STD-810.

Code 6234 and a value, entered on the SRS, will specify the storage temperature in degrees Celsius. This code is only used when a temperature other than minus 57 degrees Celsius is required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 6235 and a value, entered on the SRS, will specify the duration in hours of the low temperature storage. This code is only used when a storage other than 24 hours is required.

Code 6236 and a value, entered on the SRS, will specify the lowest operating temperature in degrees Celsius at which the device under test is designed to operate.

Code 6237 and a value, entered on the SRS, will specify the chamber air velocity in feet per second where the heat transfer rate from the surface of the test item is important.

Code 6238 and a value, entered on the SRS, will specify the chamber air velocity in metres per second where the heat transfer rate from the surface of the test item is important.

Code 6315 or 6316 and a value, entered on the SRS, will specify the operation time at low temperature in minutes and hours, respectively. Do not use these codes together.

Code 6317 is the 1006 requirement code (5.4).

Code 6318 is the 1006 except requirement code (5.4).

To detail low temperature requirements, it is mandatory to use Code 6319.

Code 6319 and an "X", entered on the SRS, will specify there shall be no evidence of physical damage.

Code 2107 and an "X", entered on the SRS, will specify the relays shall conform to the requirments of the insulation resistance test.

Code 2108 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the dielectric withstanding voltage at sea level test.

Code 2109 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the turn-off time test.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

Code 2110 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the turn-off voltage test.

Code 2111 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the turn-on time test.

Code 2112 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the turn-on voltage test.

Code 2113 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the input current sensitivity test.

Code 2114 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the leakage current test.

Code 2115 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the transient voltage test.

Code 2116 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the waveform distortion test.

Code 2117 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the power dissipation test.

5.47 Terminal Strength

Code 1409 is the 1006 test code (5.4).

Code 1410 is the 1006 except test code (5.4).

Code 1375 and an "X", entered on the SRS, will specify to test in accordance with Method 211 of MIL-STD-202. This code is mandatory if the test method is to be detailed.

There are eight additional codes to detail the test method. One or more may be entered with a value to specify the test condition letter(s) and applicable value(s). Information concerning them is as follows:

Code 1411 or Code 1419, or both and a value(s), entered on the SRS, will specify test condition letter A and the force in pounds or newtons, respectively.

Code 1412 and a value, entered on the SRS, will specify test condition letter B and the number (quantity) of bends.

Code 1413 or Code 1420, or both and a value(s), entered on the SRS, will specify test condition letter C and the weight in pounds or kilograms, respectively.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1414 and an "X", entered on the SRS, will specify test condition letter D applies.

Code 1416 or Code 1421, or both and a value(s), entered on the SRS, will specify test condition letter E and the torque in pound-inches or newton-metres, respectively, to be applied.

Code 1417 is the 1006 requirement code (5.4).

Code 1418 is the 1006 except requirement code (5.4).

To detail requirements, Code 1433 and an "X", entered on the SRS, will specify no evidence of physical damage. This code is mandatory when requirements are to be detailed after the terminal strength test.

Code 6296 and an "X", entered on the SRS, will specify the device shall remain within specified tolerance.

5.48 Thermal Shock

Code 4712 is the 1006 test code (5.4).

Code 4713 is the 1006 except test code (5.4).

To detail a thermal shock test, it is mandatory to use Codes 4714 and 4715.

Code 4714 and an "X", entered on the SRS, will specify to test in accordance with Method 107 of MIL-STD-202.

Code 4715 and a letter, entered on the SRS, will specify the applicable test condition letter.

Code 4719 and a document designation, entered on the SRS, will specify mounting shall be in accordance with the document (5.7).

Code 4720 is the 1006 requirement code (5.4).

Code 4722 is the 1006 except requirement code (5.4).

To detail requirements, Code 4723 and an "X", entered on the SRS, will specify no evidence of physical damage. This code is mandatory when requirements are to be detailed after the thermal shock test.

Codes 4726 and an "X", entered on the SRS, will specify the device shall remain within specified tolerance.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

Code 2118 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the insulation resistance test.

Code 2119 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the dielectric withstanding voltage at sea level test.

Code 2120 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the turn-off time test.

Code 2121 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the turn-off voltage test.

Code 2122 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the turn-on time test.

Code 2123 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the turn-on voltage test.

Code 2124 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the input current sensitivity test.

Code 2125 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the leakage current test.

Code 2126 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the transient voltage test.

Code 2127 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the waveform distortion test.

Code 2128 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the power dissipation test.

5.49 Transient Voltage

Code 1900 is the 1006 test code (5.4).

Code 1901 is the 1006 except test code (5.4).

To detail a transient voltage test, it is mandatory to use Code 1902 or 1914. Other codes are optional.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1902 and an "X", entered on the SRS, will specify the transient voltage test shall be performed in accordance with MIL-R-28750.

Code 1903 and a value, entered on the SRS, will specify the input voltage in volts.

Code 1905 and a value, entered on the SRS, will specify the bias voltage in volts.

Code 1907 and a value, entered on the SRS, will specify the output voltage in volts.

Code 1909 and a value, entered on the SRS, will specify the output current in milliamperes.

Code 1911 and a value, entered on the SRS, will specify the turn-off voltage in volts.

Code 1914 and an "X", entered on the SRS, will specify the transient surge voltage shall be in accordance with MIL-STD-704. When Code 1914 is used, Codes 1915 and 1916 are mandatory.

Code 1912 and a value, entered on the SRS, will specify the transient surge duration in minutes.

Code 1913 and a value, entered on the SRS, will specify the transient surge interval in seconds.

Code 1915 and a value, entered on the SRS, will specify the equipment category. The equipment category shall be "A", "B" or "C" as delineated in MIL-STD-704. When Code 1915 is used, Codes 1914 and 1916 are mandatory.

Codes 1916 and a value, entered on the SRS, will specify the transient surge voltage curve figure number. The transient surge voltage curve figure number shall be 2, 3 or 4 as delineated in MIL-STD-704. When Code 1916 is used, Codes 1914 and 1915 are mandatory.

Code 1917 and a value, entered on the SRS, will specify the output superpose voltage in volts RMS.

Code 1918 and a value, entered on the SRS, will specify the output superpose voltage plus tolerance in volts RMS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1919 and a value, entered on the SRS, will specify the output superpose voltage minus tolerance in volts RMS.

Code 1920 and a value, entered on the SRS, will specify the output superpose voltage frequency in hertz.

Code 1921 and a value, entered on the SRS, will specify the output superpose pulse voltage in volts dc.

Code 1922 and a value, entered on the SRS, will specify the output superpose pulse voltage plus tolerance in volts dc.

Code 1923 and a value, entered on the SRS, will specify the output superpose pulse voltage minus tolerance in volts dc.

Code 1924 and a value, entered on the SRS, will specify the duration of the superpose pulse in second(s).

Code 1925 and a value, entered on the SRS, will specify the duration of the superpose pulse plus tolerance in second(s).

Code 1926 and a value, entered on the SRS, will specify the duration of the superpose pulse minus tolerance in second(s).

Code 1927 is the 1006 requirement code (5.4).

Code 1928 is the 1006 except requirement code (5.4).

Code 1929 and an "X", entered on the SRS, will specify the output shall remain in the off condition.

5.50 Turn-Off Time

Code 1935 is the 1006 test code (5.4).

Code 1936 is the 1006 except test code (5.4).

To detail a turn-off time test, it is mandatory to use Code 1937. Other codes are optional.

Code 1937 and an "X", entered on the SRS, will specify the turn-off time test shall be performed in accordance with MIL-R-28750.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1938 and a value, entered on the SRS, will specify the control voltage in volts.

Code 1939 and a value, entered on the SRS, will specify the bias voltage in volts.

Code 1940 and a value, entered on the SRS, will specify the bias current in milliamperes.

Code 1941 and a value, entered on the SRS, will specify the contact voltage in volts.

Code 1942 and a value, entered on the SRS, will specify the contact current in milliamperes.

Code 1943 is the 1006 requirement code (5.4).

Code 1944 is the 1006 except requirement code (5.4).

Code 1945 and a value, entered on the SRS, will specify the maximum turn-off time in microsecond(s).

5.51 Turn-Off Voltage

Code 1950 is the 1006 test code (5.4).

Code 1951 is the 1006 except test code (5.4).

To detail a turn-off voltage test, it is mandatory to use Code 1952. Other codes are optional.

Code 1952 and an "X", entered on the SRS, will specify the turn-off voltage test shall be performed in accordance with MIL-R-28750.

Code 1953 and a value, entered on the SRS, will specify the control voltage in volts.

Code 1954 and a value, entered on the SRS, will specify the bias voltage in volts.

Code 1955 and a value, entered on the SRS, will specify the bias current in milliamperes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1956 and a value, entered on the SRS, will specify the contact voltage in volts.

Code 1957 and a value, entered on the SRS, will specify the contact current in milliamperes.

Code 1958 is the 1006 requirement code (5.4).

Code 1959 is the 1006 except requirement code (5.4).

Code 1960 and a value, entered on the SRS, will specify the minimum turn-off voltage in volts.

5.52 Turn-on Time

Code 1965 is the 1006 test code (5.4).

Code 1966 is the 1006 except test code (5.4).

To detail a turn-on time test, it is mandatory to use Code 1967. Other codes are optional.

Code 1967 and an "X", entered on the SRS, will specify the turn-on time test shall be performed in accordance with MIL-R-28750.

Code 1968 and a value, entered on the SRS, will specify the control voltage in volts.

Code 1969 and a value, entered on the SRS, will specify the bias voltage in volts.

Code 1970 and a value, entered on the SRS, will specify the bias current in milliamperes.

Code 1971 and a value, entered on the SRS, will specify the contact voltage in volts.

Code 1972 and a value, entered on the SRS, will specify the contact current in milliamperes.

Code 1973 is the 1006 requirement code (5.4).

Code 1974 is the 1006 except requirement code (5.4).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1975 and a value, entered on the SRS, will specify the maximum turn-on time in microsecond(s).

5.53 Turn-On Voltage

Code 1980 is the 1006 test code (5.4).

Code 1981 is the 1006 except test code (5.4).

To detail a turn-on voltage test, it is mandatory to use Code 1982. Other codes are optional.

Code 1982 and an "X", entered on the SRS, will specify the turn-on voltage test shall be performed in accordance with MIL-R-28750.

Code 1984 and a value, entered on the SRS, will specify the bias voltage in volts.

Code 1985 and a value, entered on the SRS, will specify the bias current in milliamperes.

Code 1986 and a value, entered on the SRS, will specify the contact voltage in volts.

Code 1987 and a value, entered on the SRS, will specify the contact current in milliamperes.

Code 1988 is the 1006 requirement code (5.4).

Code 1989 is the 1006 except requirement code (5.4).

Code 1990 and a value, entered on the SRS, will specify the maximum turn-on voltage in volts.

5.54 Vibration, High Frequency

Code 1445 is the 1006 test code (5.4).

Code 1446 is the 1006 except test code (5.4).

To detail the high frequency vibration test, Code 1447 and Code 1448 are mandatory. Other codes are optional.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1447 and an "X", entered on the SRS, will specify to test in accordance with Method 204 of MIL-STD-202.

Code 1448 and a letter, entered on the SRS, will specify the applicable test condition letter as selected from Method 204 of MIL-STD-202.

Code 6200 and a value, entered on the SRS, will specify the percent of rated load to be applied during test.

There are three codes available to specify the method of mounting. Only one may be used. Information concerning them is as follows:

Code 4709 and an "X", entered on the SRS, will specify any suitable mounting method may be used.

Code 4708 and an "X", entered on the SRS, will specify normal usage mounting means shall be used.

Code 4707 and a document designation, entered on the SRS, will specify to mount in accordance with the document (5.7).

There are two codes available to specify the method of determining mechanical resonance. Only one of the codes may be entered. Information concerning them is as follows:

Code 1533 and an "X", entered on the SRS, will specify mechanical resonance shall be monitored visually by means of a strobotac.

Code 1534 and an "X", entered on the SRS, will specify mechanical resonance shall be monitored by electrical output indicators.

Code 1454 is the 1006 requirement code (5.4).

Code 1455 is the 1006 except requirement code (5.4).

To detail requirements, Code 1456 and an "X", entered on the SRS, will specify no evidence of physical damage. This code is mandatory when requirements are to be detailed after the high frequency vibration test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1469 and an "X", entered on the SRS, will specify the device shall remain within specified tolerance.

Code 2129 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the insulation resistance test.

Code 2130 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the dielectric withstanding voltage at sea level test.

Code 2131 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the turn-off time test.

Code 2132 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the turn-off voltage test.

Code 2133 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the turn-on time test.

Code 2134 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the turn-on voltage test.

Code 2135 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the input current sensitivity test.

Code 2136 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the leakage current test.

Code 2137 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the transient voltage test.

Code 2138 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the waveform distortion test.

Code 2139 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the power dissipation test.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

5.55 Vibration, Low Frequency

Code 1465 is the 1006 test code (5.4).

Code 1466 is the 1006 except test code (5.4).

To detail the low frequency vibration test, Code 1467 is mandatory. Other codes are optional.

Code 1467 and an "X", entered on the SRS, will specify to test in accordance with Method 201 of MIL-STD-202.

Code 1470 and an "X", entered on the SRS, will specify the duration in hours of vibration per axis. This code should only be used when the required vibration per axis is other than 2 hours as specified in Method 201 of MIL-STD-202.

There are three codes available to specify the method of mounting. Only one may be used. Information concerning them is as follows:

Code 4731 and an "X", entered on the SRS, will specify any suitable mounting method may be used.

Code 4730 and an "X", entered on the SRS, will specify normal mounting means shall be used.

Code 4729 and a document designation, entered on the SRS, will specify to mount in accordance with the document (5.7).

There are several codes available to specify the direction of motion. These may be used as required.

Code 1535 and an "X", entered on the SRS, will specify motion shall be perpendicular to the longitudinal axis.

Code 1536 and an "X", entered on the SRS, will specify motion shall be perpendicular to the longitudinal axis.

Code 4979 and an "X", entered on the SRS, will specify motion shall be on the centerline of the most sensitive axis.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 4978 and an "X", entered on the SRS, will specify motion shall be 90 degrees from the centerline of the most sensitive axis.

Code 1537 and an "X", entered on the SRS, will specify motion shall be in each of three mutually perpendicular axes.

Code 6201 and a value, entered on the SRS, will specify the percent of rated load to be applied during test.

Code 1474 is the 1006 requirement code (5.4).

Code 1475 is the 1006 except requirement code (5.4).

To detail requirements, Code 1476 and an "X", entered on the SRS, will specify no evidence of physical damage. This code is mandatory when requirements are to be detailed after the low frequency vibration test.

Code 1480 and an "X", entered on the SRS, will specify the device shall remain within specified tolerance.

Code 2140 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the insulation resistance test.

Code 2141 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the dielectric withstanding voltage at sea level test.

Code 2142 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the turn-off time test.

Code 2143 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the turn-off voltage test.

Code 2144 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the turn-on time test.

Code 2145 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the turn-on voltage test.

Code 2146 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the input current sensitivity test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 2147 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the leakage current test.

Code 2148 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the transient voltage test.

Code 2149 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the waveform distortion test.

Code 2150 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the power dissipation test.

5.56 Vibration, Random

Code 1425 is the 1006 test code (5.4).

Code 1426 is the 1006 except test code (5.4).

To detail a random vibration test, in accordance with Method 214 of MIL-STD-202, Codes 1427, 1428, and 1438 or 1431 are mandatory. Other codes are optional.

Code 1427 and an "X", entered on the SRS, will specify the random vibration test shall be performed in accordance with Method 214 of MIL-STD-202. When Code 1427 is used, Codes 1428 and 1438 or 1431 are mandatory.

Code 1428 and a Roman numeral and letter, entered on the SRS, will specify the applicable test condition Roman numeral and letter as selected from Method 214 of MIL-STD-202. Enter the Roman numeral (I or II) and follow with the letter, for example, IB or IIK.

It is mandatory that one duration of application per axis be specified. Information concerning codes is as follows:

Code 1438 and a value, entered on the SRS, will specify the duration in minutes of the random excitation per axis. The options are 3 or 15 minutes. Do not use Code 1438 with Code 1431.

Code 1431 and a value, entered on the SRS, will specify the duration in hours of the random excitation per axis. The options are 1.5 and 8 hours. Do not use Code 1431 with Code 1438.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

There are three codes to specify the monitoring instrumentation of the excitation. Only one may be selected.

Code 1452 and an "X", entered on the SRS, will specify any suitable system may be used to monitor excitation.

Code 1453 and an "X", entered on the SRS, will specify the use of a calibrated ac to dc converter and a strip chart recorder to monitor excitation.

Code 1459 and an "X", entered on the SRS, will specify the use of a calibrated oscilloscope to monitor excitation.

Code 1430 and a value, entered on the SRS, will specify the quantity of vibration monitoring test points.

Code 1439 or 1462 may be used to specify the location of the test point(s).

Code 1439 and an "X", entered on the SRS, will specify any suitable location(s) is permitted to mount the monitoring test points.

Code 1462 and an "X", entered on the SRS, will specify the monitoring test points shall be mounted as close as practical to the test specimen.

Code 4678 and a value, entered on the SRS, will specify the percent of rated load to be applied during test.

There are three codes available to specify the method of mounting. Only one may be used. Information concerning them is as follows:

Code 4977 and an "X", entered on the SRS, will specify any suitable mounting method may be used.

Code 4976 and an "X", entered on the SRS, will specify normal mounting means shall be used.

Code 4975 and a document designation, entered on the SRS, will specify to mount in accordance with the document. The applicable test name from the referenced document shall be entered in addition to the document designation (5.7).

Code 1434 is the 1006 requirement code (5.4).

Code 1435 is the 1006 except requirement code (5.4).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

To detail requirements, Code 1436 and an "X", entered on the SRS, will specify no evidence of physical damage. This code is mandatory when requirements are to be detailed after the random vibration test.

Code 1538 and an "X", entered on the SRS, will specify the device shall remain within specified tolerance.

Code 2151 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the insulation resistance test.

Code 2152 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the dielectric withstanding voltage at sea level test.

Code 2153 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the turn-off time test.

Code 2154 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the turn-off voltage test.

Code 2155 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the turn-on time test.

Code 2156 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the turn-on voltage test.

Code 2157 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the input current sensitivity test.

Code 2158 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the leakage current test.

Code 2159 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the transient voltage test.

Code 2160 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the waveform distortion test.

Code 2161 and an "X", entered on the SRS, will specify the relays shall conform to the requirements of the power dissipation test.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

5.57 Waveform Distortion

Code 2000 is the 1006 test code (5.4).

Code 2001 is the 1006 except test code (5.4).

To detail a wave distortion test, it is mandatory to use Code 2002. Other codes are optional.

Code 2002 and an "X", entered on the SRS, will specify the waveform distortion test shall be performed in accordance with MIL-R-28750.

Code 2003 and a value, entered on the SRS, will specify the control voltage in volts.

Code 2004 and a value, entered on the SRS, will specify the bias voltage in volts.

Code 2005 and a value, entered on the SRS, will specify the bias current in milliamperes.

Code 2006 and a value, entered on the SRS, will specify the contact voltage in volts.

Code 2007 and a value, entered on the SRS, will specify the contact current in milliamperes.

Code 2008 is the 1006 requirement code (5.4).

Code 2009 is the 1006 except requirement code (5.4).

Code 2010 and a value, entered on the SRS, will specify the maximum output waveform distortion in volts RMS. When Code 2010 is used, do not use Code 2011.

Code 2011 and a value, entered on the SRS, will specify the maximum output waveform distortion in volts peak-to-peak. When Code 2011 is used, do not use Code 2010.

Code 2012 and a value, entered on the SRS, will specify the minimum steady state output voltage in volts RMS.

Code 2013 and a value, entered on the SRS, will specify the minimum output voltage immediately prior to conduction in volts RMS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
1.3	Enter on the SRS requirements from MIL-STD-35	
5.9	Electrical Characteristics	
	Use Table I for electrical design characteristics.	
	*Control voltage (Vdc)	Table I
	*Contact voltage	
	(Vdc)	Table I
	(Vrms)	Table I
	(V peak)	Table I
	*Contact current (A)	Table I
5.10	*Poles	
	*(Quantity)	1565
	*Throws (Quantity)	1566
5.11	Pin Identification	
	Control voltage (pin ident)	1567
	Control common (pin ident)	1568
	Bias, positive (pin ident)	1569
	Load, normally open (pin ident)	1570
	Output common (pin ident)	1571

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.11 (Cont)	Pin Identification (Cont)	
	Load, normally closed (pin ident)	1572
	Load, normally open (pin ident)	1573
	Output common (pin ident)	1574
	Load, normally closed (pin ident)	1575
5.12	Design and Construction	
	Style (Select one)	
	A.	1580
	B.	1581
	C.	1582
	Base (Select one)	
	Octal.	1584
	255.	1585
	Wire leads.	1586
	Screw.	1587

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.12 (Cont)	Design and Construction (Cont)	
	Case construction (Select one)	
	Glass-to-metal hermetically sealed.	1588
	Metal-to-metal hermetically sealed.	1589
	Ceramic-to-metal hermetically sealed.	1590
	Encapsulated.	1591
5.13	Weight	
	Ounces	
	Minimum	1592
	Maximum	1593
	Grams	
	Minimum	1594
	Maximum	1595
5.14	Altitude Range	
	Operating condition	
	Sea level to (ft)	5060
	Sea level to (m)	5061
	Nonoperating condition	
	Sea level to (ft)	5062
	Sea level to (m)	5063

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.15	Temperature Rating	Table III
5.16	Design Reliability Rating	
	*Failure rate (pct/1000 hr)	7025
	*Confidence level (pct)	7026
	*Test temperature (deg C)	7029
	Electrical stress (Select one)	
	Voltage (pct of rated V)	7030
	Load (pct of rated load)	7027
	Power (pct of rated W)	7028
5.17	Mounting Hardware (select one)	Table T
	Hardware furnished but not mounted.	6947
	Hardware furnished and installed.	6948

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.18	Altitude	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	1600
	Per 1006 document except (see 5.4) ____	1601
	Per MIL-STD-810, Method 500.	1602
	Procedure (no.)	1603
	Temperature (deg C)	1604
	Tolerance + or - (deg C)	1605
	Altitude	
	(ft)	1606
	(m)	1607
	Pressure	
	(torr)	1608
	(kPa)	1609
	Maximum rate of pressure change (select one)	
	(torr/s)	1610
	(kPa/s)	1611

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.18 (Cont)	Altitude (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1615
	Per 1006 document except (see 5.4) ____	1616
	As follows:	
	*No erratic operation or malfunction.	1617
	Items shall remain within specified tolerance.	1618
5.19	Bias Current	
	*Test methods (Select one)	
	Per 1006 document (see 5.4).	1625
	Per 1006 document except (see 5.4) ____	1626
	Per MIL-R-28750.	1627
	Control voltage (V)	1628
	Bias voltage (V)	1629
	Contact voltage (V)	1630
	Contact current (A)	1631

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.19 (Cont)	Bias Current (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1635
	Per 1006 document except (see 5.4) ____	1636
	As follows:	
	Maximum bias current (mA)	1637
5.20	Capacitance	
	*Test methods (Select one)	
	Per 1006 document (see 5.4).	1640
	Per 1006 document except (see 5.4) ____	1641
	Per MIL-STD-202, Method 305.	1642
	*Test frequency (kHz)	1643
	*Tolerance ± (kHz)	1644
	Accuracy of test equipment (pct)	1645
	Maximum test voltage (V)	1646

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.20 (Cont)	Capacitance (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1650
	Per 1006 document except (see 5.4) ____	1651
	As follows:	
	Maximum capacitance (pF)	1652
5.21	Closed-Contact Voltage Drop and Stability	
	*Test methods (Select one)	
	Per 1006 document (see 5.4).	1655
	Per 1006 document except (see 5.4) ____	1656
	Per MIL-R-27777.	1657
	Control voltage (V)	1659
	Control current (mA)	1660
	Contact voltage (V)	1661
	Minimum contact current (mA)	1663
	Maximum contact current (A)	1664
	Duration of contact current interruption (s)	1666

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.21 (Cont)	Closed-Contact Voltage Drop and Stability (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1670
	Per 1006 document except (see 5.4) ____	1671
	As follows:	
	Maximum contact voltage drop (V)	1672
	Contact current shall remain constant.	1673
	Contact shall remain closed when constant current is applied to the input control terminal(s).	1674
5.22	Crosstalk	
	*Test methods (Select one)	
	Per 1006 document (see 5.4).	1680
	Per 1006 document except (see 5.4) ___	1681
	Per MIL-R-28750.	1682
	Paralleled capacitance (pF)	1683
	Minimum input signal voltage (p to p)	1684
	Maximum input signal voltage (p to p)	1685
	Maximum input signal frequency (MHz)	1686
	Measurement terminals (des)	1687

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.22 (Cont)	Crosstalk (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1690
	Per 1006 document except (see 5.4) ____	1691
	As follows:	
	Minimum attenuation (dB)	1692
5.23	Current Rating	
	*Test methods (Select one)	
	Per 1006 document (see 5.4).	1700
	Per 1006 document except (see 5.4) ____	1701
	Per MIL-R-28750.	1702
	Control voltage (V)	1703
	Bias voltage (V)	1704
	Bias current (mA)	1705
	Contact voltage (V)	1706
	Contact current varied between:	
	*Minimum (mA)	1707
	*Maximum (mA)	1708

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.23 (Cont)	Current Rating (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1710
	Per 1006 document except (5.4) ____	1711
	As follows:	
	DC offset voltage shall remain as specified.	1712
	Waveform distortion shall remain as specified.	1713
5.24	DC Offset Voltage	
	*Test methods (Select one)	
	Per 1006 document (see 5.4).	1720
	Per 1006 document except (see 5.4) ____	1721
	Per MIL-R-28750.	1722
	Control voltage (V)	1723
	Bias voltage (V)	1724
	Bias current (mA)	1725
	Contact voltage (V)	1726
	Contact current (mA)	1727

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.24 (Cont)	DC Offset Voltage (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1728
	Per 1006 document except (see 5.4) ____	1729
	As follows:	
	Maximum offset voltage (Vdc)	1730
5.25	Dielectric Withstanding Voltage at Reduced Barametric Pressure	
	*Test methods (Select one)	
	Per 1006 document (see 5.4).	4883
	Per 1006 document except (see 5.4) ____	4884
	Per MIL-STD-202, Method 301.	6300
	*Altitude per Method 105 of MIL-STD-202.	
	*Test condition (letter)	4886
	*Test voltage (Select one)	
	(Vdc)	4885
	(Vac)	4849
	Test frequency (Hz)	6307

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.25 (Cont)	Per MIL-STD-202, Method 301. (Cont)	
	Point of voltage application.	
	Between terminations tied together and mounting hardware.	6311
	Between terminations tied together and case.	6312
	Between mutually insulated parts.	6292
	Between all insulated parts and ground.	6293
	Between current carrying parts and the case.	6294
	Special preparation per document from 5.7 (doc des)	4859
	Duration of voltage application if other than 60 (s)	4891
	Mounting shall be per document from 5.7 (doc des)	6280
	Regulation of test voltage (pct)	6308
	Minimum kVA rating of voltage source (kVA)	4900
	Maximum surge current (Select one)	
	(A)	4902
	(mA)	6310

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.25 (Cont)	Dielectric Withstanding Voltage at Reduced Barametric Pressure (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	4907
	Per 1006 document except (see 5.4) ____	4908
	As follows:	
	*No evidence of flashover, mechanical damage, arcing, or insulation breakdown.	4906
	Maximum leakage (mA)	4894
	Remain within specified tolerance.	4901
5.25	Dielectric Withstanding Voltage at Sea Level	
	*Test methods (Select one)	
	Per 1006 document (see 5.4).	4860
	Per 1006 document except (see 5.4) ____	4861
	Per MIL-STD-202, Method 301.	4862
	*Test voltage (Select one)	
	(Vdc)	4854
	(Vac)	4855
	Test frequency (Hz)	4852

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.26 (Cont)	Per MIL-STD-202, Method 301. (Cont)	
	Points of voltage application.	
	Between terminations tied together and mounting hardware.	4842
	Between terminations tied together and case.	4848
	Between mutually insulated parts.	4844
	Between all insulated parts and ground.	4845
	Between current carrying parts and the case.	4846
	Special preparation per document from 5.7 (doc des)	4850
	Duration of voltage application if other than 60 (s)	4867
	Mounting per document from 5.7 (doc des)	5000
	Regulation of test voltage (pct)	4869
	Minimum kVA rating of voltage source (kVA)	4870
	Maximum surge current (Select one)	
	(A)	4717
	(mA)	4897

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.26 (Cont)	Per MIL-STD-202, Method 301. (Cont)	
	Method of voltage connection per document from 5.7 (doc des)	6267
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	4873
	Per 1006 document except (see 5.4) ____	4874
	As follows:	
	*No evidence of flashover, mechanical damage, arcing, or insulation breakdown.	4856
	Maximum leakage (mA)	4875
	Remain within specified tolerance.	4847
5.27	Electrical System Spike	
	*Test methods (Select one)	
	Per 1006 document (see 5.4).	1740
	Per 1006 document except (see 5.4) ____	1741
	Per MIL-R-28750.	1742
	Control voltage (V)	1743
	Bias voltage (V)	1744
	Bias current (mA)	1745

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.27 (Cont)	Per MIL-R-28750. (Cont)	
	Contact voltage (V)	1746
	Contact current (mA)	1747
	Minimum spike amplitude (V)	1748
	Spikes per second (No.)	1749
	Maximum spike width (micros)	1750
	Duration for each polarity (min)	1751
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1752
	Per 1006 document except (see 5.4) ____	1753
	As follows:	
	*There shall be no physical damage.	1754
	The relays shall conform to the requirements of the following tests:	
	Turn-off time.	1755
	Turn-off voltage.	1756
	Turn-on time.	1757
	Turn-on voltage.	1758

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.27 (Cont)	As follows: (Cont)	
	Input current sensitivity.	1759
	Leakage current.	1760
	Transient voltage.	1761
	Waveform distortion.	1762
	Power dissipation.	1763
5.28	Electromagnetic Interference	
	*Test methods (Select one)	
	Per 1006 document (see 5.4).	1770
	Per 1006 document except (see 5.4) ____	1771
	Per MIL-STD-462.	1772
	Load steps (No.)	1773
	*Load/step (pct)	1774
	Equipment class (No.)	1775

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.28 (Cont)	Per MIL-STD-462. (Cont)	
	Measurements:	
	Conducted electromagnetic interference.	1776
	Radiated electromagnetic interference.	1777
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1778
	Per 1006 document except (see 5.4) ____	1779
	As follows:	
	Requirements per MIL-STD-461.	1780
	No adverse interference to adjacent equipment at any load step.	1781
5.29	Input Current Sensitivity	
	*Test methods (Select one)	
	Per 1006 document (see 5.4).	1785
	Per 1006 document except (see 5.4) ____	1786
	Per MIL-R-27777.	1787
	Contact current (mA)	1789

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.29 (Cont)	Per MIL-R-27777. (Cont)	
	Maximum input current (mA)	1792
	Bias voltage (V)	1793
	Bias current (mA)	1795
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1797
	Per 1006 document except (see 5.4) ____	1798
	As follows:	
	Minimum input current (mA)	1799
5.30	Input Resistance	
	*Test methods (Select one)	
	Per 1006 document (see 5.4).	1800
	Per 1006 document except (see 5.4) ____	1801
	Per MIL-R-27777.	1802
	Input current (mA)	1803
	Input voltage (V)	1805

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.30 (Cont)	Input Resistance (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1810
	Per 1006 document except (see 5.4) ____	1811
	As follows:	
	Maximum input resistance (ohms)	1812
5.31	Insulation Resistance	
	*Test methods (Select one)	
	Per 1006 document (see 5.4).	1370
	Per 1006 document except (see 5.4) ____	1371
	Per MIL-STD-202, Method 302.	1511
	*Condition (Select one)	
	Test condition (letter)	1378
	Test voltage (Vdc)	1373
	Electrification time, if other than 2 minutes (s)	1376
	Maximum measurement error at required value if other than 10 (pct)	1377

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.31 (Cont)	Per MIL-STD-202, Method 302. (Cont)	
	Points of application of test voltage.	
	Between terminations tied together and mounting hardware.	1497
	Between terminations tied together and case.	1498
	Between mutually insulated parts.	1522
	Between insulated parts and ground.	1523
	Between current carrying parts and the case.	1524
	Special preparations or conditions per document from 5.7 (doc des)	1520
	First test temperature (deg C)	1372
	Second test temperature (deg C)	1381
	Temperature tolerance ± (deg C)	1383
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1379
	Per 1006 document except (see 5.4) ____	1380

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.31 (Cont)	*Requirements (Select one) (Cont)	
	As follows:	
	*No evidence of physical damage.	1407
	Minimum insulation resistance (Select one)	
	Single test	
	(Megohms)	1386
	Multiple test	
	First test (megohms)	1384
	Second test (megohms)	1387
	Remain within specified tolerance.	1388
5.32	Isolation (Overdrive and Overload)	
	*Test methods (Select one)	
	Per 1006 document (see 5.4).	1815
	Per 1006 document except (see 5.4) ____	1816
	Per MIL-R-27777.	1817
	Test in accordance with Table II	Table II

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.32 (Cont)	Isolation (Overdrive and Overload) (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1818
	Per 1006 document except (see 5.4) ____	1819
	As follows:	
	The requirements shall be as specified in Table II.	1820
5.33	Leakage Current	
	*Test method (Select one)	
	Per 1006 document (see 5.4).	1825
	Per 1006 document except (see 5.4) ____	1826
	Per MIL-R-28750.	1827
	Test temperature (deg C)	1828
	Tolerance ± (deg C)	1829
	Contact voltage 1 (V)	1830
	Contact voltage 2 (V)	1831
	Bias current (mA)	1832

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.33 (Cont)	Leakage Current (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1833
	Per 1006 document except (see 5.4) ____	1834
	As follows:	
	Maximum open contact leakage current at contact voltage 1 (microA)	1835
	Maximum open contact leakage current at contact voltage 2 (microA)	1836
	Maximum closed contact leakage current at contact voltage 1 (microA)	1837
	Maximum closed contact leakage current at contact voltage 2 (microA)	1838
5.34	Moisture Resistance	
	*Test methods (Select one)	
	Per 1006 document (see 5.4).	1390
	Per 1006 document except (see 5.4) ____	1391
	Per MIL-STD-202, Method 106.	1397
	Loading voltage (Select one)	
	(Vdc)	4981
	(Vac)	4980

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.34 (Cont)	Per MIL-STD-202, Method 106. (Cont)	
	Step 7a not applicable.	4985
	Step 7b not applicable.	4986
	Mount per document from 5.7 (doc des)	1449
	Perform dielectric withstanding voltage test at high humidity.	4983
	Perform dielectric withstanding voltage test after drying.	4984
	Perform the following tests after drying:	
	Closed contact voltage drop and stability.	2050
	Leakage current.	2051
	Turn-off voltage.	2052
	Turn-on voltage.	2053
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1399
	Per 1006 document except (see 5.4) ____	1400

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.34 (Cont)	*Requirements (Select one) (Cont)	
	As follows:	
	*No evidence of corrosion or physical damage.	1396
	Remain within specified tolerance.	1398
	No evidence of arcing, flashover, or insulation breakdown when DWV applied.	1394
	Maximum leakage at high humidity (mA)	1429
	Maximum leakage after drying (mA)	1404
	Minimum insulation resistance at high humidity (megohms)	1432
	Minimum insulation resistance after drying (megohms)	1406
	Maximum contact voltage drop (V)	2060
	Maximum leakage current (microA)	2061
	Minimum turn-off voltage (V)	2062
	Maximum turn-on voltage (V)	2063

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.35	Open-Contact Resistance	
	*Test methods (Select one)	
	Per 1006 document (see 5.4).	1845
	Per 1006 document except (see 5.4) ____	1846
	Per MIL-R-27777.	1847
	Test temperature (deg C)	1848
	Tolerance ± (deg C)	1849
	Test voltage 1 (Vdc)	1850
	Test voltage 2 (Vdc)	1851
	Equipment accuracy (pct)	1852
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1853
	Per 1006 document except (see 5.4) ____	1854
	As follows:	
	Minimum open-contact resistance (megohms)	1855
	Maximum leakage current at test voltage 1 (microA)	1856
	Maximum leakage current at test voltage 2 (microA)	1857

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.36	Power Dissipation	
	*Test methods (Select one)	
	Per 1006 document (see 5.4).	1860
	Per 1006 document except (see 5.4) ____	1861
	Per MIL-R-28750.	1862
	Control voltage (V)	1863
	Bias voltage (V)	1864
	Contact voltage (V)	1865
	Contact current (mA)	1866
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1867
	Per 1006 document except (see 5.4) ____	1868
	As follows:	
	Maximum power dissipation (w)	1869

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.37	Reliability Screening	
	*Test methods (Select one)	
	Per 1006 document (see 5.4).	6695
	Per 1006 document except (see 5.4) ____	6696
	Per MIL-STD-202, Method 108.	6697
	*Duration (select one)	
	Test condition (letter)	6698
	(hr)	6699
	Duty cycle (select one)	
	1.5 hours on and 0.5 hours off.	6710
	Steady state.	6713
	*Test temperature (deg C)	6700
	*Tolerance (deg C)	6701
	Still air required.	6923
	Power applied times rated power (no.)	6921
	Maximum voltage (V)	6939
	Test potential (select one)	
	(Vac)	6706
	(Vdc)	6707

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.37 (Cont)	Per MIL-STD-202, Method 108. (Cont)	
	Electrical output load (ohms)	6920
	Measurement intervals (hr)	6922
	Mount per document from 5.7 (doc des)	6924
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	6928
	Per 1006 document except (see 5.4) ____	6929
	As follows:	
	*No evidence of physical damage.	6930
	Remain within specified tolerance.	6937
	The relays shall conform to the requirements of the following tests:	
	Turn-off time.	2065
	Turn-off voltage.	2066
	Turn-on time.	2067
	Turn-on voltage.	2068
	Input current sensitivity.	2069
	Leakage current.	2070
	Transient voltage.	2071
	Waveform distortion.	2072
	Power dissipation.	2073

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.38	Resistance to Soldering Heat	
	*Test methods (Select one)	
	Per 1006 document (see 5.4).	4688
	Per 1006 document except (see 5.4) ____	4689
	Per MIL-STD-202, Method 210.	4698
	*Test condition (letter)	4691
	Number of terminations tested (quantity)	4694
	Depth of immersion in solder.	
	(in.)	4692
	(mm)	4669
	Immersion in flux permitted.	4671
	Special preparations permitted.	4989
	Cooling time (min)	4695
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	4699
	Per 1006 document except (see 5.4) ____	4700

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.38 (Cont)	*Requirements (Select one) (Cont)	
	As follows:	
	*No evidence of physical damage.	4701
	Remain within specified tolerance.	4718
	No degradation of performance.	4721
5.39	Resistance to Solvents	
	*Test methods (Select one)	
	Per 1006 document (see 5.4).	4828
	Per 1006 document except (see 5.4) ____	4829
	Per MIL-STD-202, Method 215.	4839
	Solvent(s) to be added.	4838
	Solvent(s) to be deleted.	4835
	Brush marking area.	4831
	All of specimen to be brushed.	6279
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	4833
	Per 1006 document except (see 5.4) ____	4834

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.39 (Cont)	*Requirements (Select one) (Cont)	
	As follows:	
	*No evidence of degradation of performance or physical damage.	4830
	Marking shall remain legible.	4836
5.40	Salt Spray	
	*Test methods (Select one)	
	Per 1006 document (see 5.4).	4769
	Per 1006 document except (see 5.4) ____	4770
	Per MIL-STD-202, Method 101.	4771
	*Test condition (letter)	4772
	Special mounting per document from 5.7 (doc des)	4773
	Mounting shall be by normal method.	4765
	Mounting shall be by any suitable method.	4766
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	4877
	Per 1006 document except (see 5.4) ____	4878

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.40 (Cont)	*Requirements (Select one) (Cont)	
	As follows:	
	*No evidence of corrosion, physical damage, or degradation of performance.	4782
	The relays shall conform to the requirements of the following tests:	
	Insulation resistance.	2074
	Dielectric withstanding voltage at sea level.	2075
	Turn-off time.	2076
	Turn-off voltage.	2077
	Turn-on time.	2078
	Turn-on voltage.	2079
	Input current sensitivity.	2080
	Leakage current.	2081
	Transient voltage.	2082
	Waveform distortion.	2083
	Power dissipation.	2084

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.41	Seal	
	*Test methods (Select one)	
	Per 1006 document (see 5.4).	4733
	Per 1006 document except (see 5.4) ___	4734
	Per MIL-STD-202, Method 112.	4732
	*Test condition letter (Select one)	
	Letter A (A)	4737
	Media for test (name)	4738
	Minimum media path temperature (deg C)	4739
	Letter B (B)	6320
	Media for test (name)	6321
	Minimum media bath temperature (deg C)	6322
	Letter C (C)	6323
	*Leak rate sensitivity (atm cm^3/s)	4741
	*Test procedure (Select one)	
	Test procedure 1 (1)	4740
	Backfill pressure	
	(psi)	4742
	(kPa)	4736

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.41 (Cont)	*Test procedure (Select one) (Cont)	
	Test procedure II (II)	6324
	Backfill pressure	
	(psi)	6325
	(kPa)	6326
	Number of pressure cycles (quantity)	4749
	Test procedure III (III)	6328
	Gross leak test condition (letter)	4750
	Test procedure IV (IV)	6329
	Chamber pressure	
	(torr)	4751
	(kPa)	4735
	Duration of reduced pressure (min)	4752
	Gross leak test condition (letter)	6330
	Letter D (D)	6331
	Any suitable mounting fixture.	4743
	Letter E (E)	
	Any suitable mounting fixture.	6333

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.41 (Cont)	Seal (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	4744
	Per 1006 document except (see 5.4) ____	4745
	As follows:	
	Per specified test method sensitivity.	4746
	No bubbles indicative of leakage.	4748
5.42	Shock, Specified Pulse	
	*Test methods (Select one)	
	Per 1006 document (see 5.4).	1501
	Per 1006 document except (see 5.4) ____	1502
	Per MIL-STD-202, Method 213.	1500
	*Test condition (letter).	1504
	Method of mounting (Select one)	
	Any suitable method.	4686
	Normal mounting means.	4685
	Mount per document from 5.7 (doc des)	4684

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.42 (Cont)	Per MIL-STD-202, Method 213. (Cont)	
	Percent rated load applied (pct)	6204
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1507
	Per 1006 document except (see 5.4) ____	1508
	As follows:	
	*No evidence of physical damage.	1509
	No discontinuity during test.	1471
	Remain within specified tolerance.	4703
	The relays shall conform to the requirements of the following tests:	
	Insulation resistance.	2085
	Dielectric withstanding voltage at sea level.	2086
	Turn-off time.	2087
	Turn-off voltage.	2088
	Turn-on time.	2089
	Turn-on voltage.	2090

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.42 (Cont)	The relays shall conform to the requirements of the following tests: (Cont)	
	Input current sensitivity.	2091
	Leakage current.	2092
	Transient voltage.	2093
	Waveform distortion.	2094
	Power dissipation.	2095
5.43	Solderability	
	*Test methods (Select one)	
	Per 1006 document (see 5.4).	4661
	Per 1006 document except (see 5.4) ____	4662
	Per MIL-STD-202, Method 208.	4683
	Number of terminals to be tested (quantity)	4666
	Depth of immersion	
	(in.)	4667
	(mm)	4663
	Distance wrap wire applied from body	
	(in.)	4664
	(mm)	4665

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.43 (Cont)	Per MIL-STD-202, Method 208. (Cont)	
	Special preparations permitted.	6205
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	4673
	Per 1006 document except (see 5.4) ____	4674
	As follows:	
	*No evidence of physical damage.	4675
	Meet evaluation criteria specified in Method 208 of MIL-STD-202.	4672
	Remain within specified tolerance.	4677
5.44	Speed-Distortion	
	*Test methods (Select one)	
	Per 1006 document (see 5.4).	1875
	Per 1006 document except (see 5.4) ____	1876
	Per MIL-R-27777.	1877
	Minimum test speed (bauds)	1878
	Maximum pulse width distortion (pct)	1879
	Maximum test speed (bauds)	1880
	Minimum pulse width distortion (pct)	1881

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.44 (Cont)	Per MIL-R-27777. (Cont)	
	Test pulse duty cycle (pct)	1882
	Control voltage (Vdc)	1883
	Neutral output voltage (Vdc)	1884
	Polar voltage (Vdc)	1885
	Input current 1 (mA)	1886
	Output current 1 (mA)	1887
	Input current 2 (mA)	1888
	Output current 2 (mA)	1889
	Input current 3 (mA)	1890
	Output current 3 (mA)	1891
	Test circuit figure (No.)	1892
	Except ____.	1893
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1894
	Per 1006 document except (see 5.4) ____	1895

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.44 (Cont)	*Requirements (Select one) (Cont)	
	As follows:	
	Relay shall operate correctly at maximum specified bauds.	1896
	Maximum percent distortion at any speed (pct)	1897
5.45	Temperature, High	
	*Test methods (Select one)	
	Per 1006 document (see 5.4).	6216
	Per 1006 document except (see 5.4) ____	6217
	Per MIL-STD-810, Method 501.	6218
	*Procedure (Roman numeral)	6219
	Storage temperature if other than 71 (deg C)	6220
	Storage duration if other than 48 (hr)	6221
	Highest operating temperature (deg C)	6222
	Operation time (Select one)	
	(min)	6224
	(hr)	6225

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.45 (Cont)	Temperature, High (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	6227
	Per 1006 document except (see 5.4) ____	6228
	As follows:	
	*No evidence of physical damage.	6229
	The relays shall conform to the requirements of the following tests:	
	Insulation resistance.	2096
	Dielectric withstanding voltage at sea level.	2097
	Turn-off time.	2098
	Turn-off voltage.	2099
	Turn-on time.	2100
	Turn-on voltage.	2101
	Input current sensitivity.	2102
	Leakage current.	2103
	Transient voltage.	2104
	Waveform distortion.	2105
	Power dissipation.	2106

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.46	Temperature, Low	
	*Test methods (Select one)	
	Per 1006 document (see 5.4).	6230
	Per 1006 document except (see 5.4) ____	6231
	Per MIL-STD-810, Method 502.	6232
	Storage temperature if other than -57 (deg C)	6234
	Storage duration if other than 24 (hr)	6235
	Lowest operating temperature (deg C)	6236
	Chamber air velocity	
	(ft/s)	6237
	(m/s)	6238
	Operation time (Select one)	
	(min)	6315
	(hr)	6316

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.46 (Cont)	Temperature, Low (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	6317
	Per 1006 document except (see 5.4) ____	6318
	As follows:	
	*No evidence of physical damage.	6319
	The relays shall conform to the requirements of the following tests:	
	Insulation resistance.	2107
	Dielectric withstanding voltage at sea level.	2108
	Turn-off time.	2109
	Turn-off voltage.	2110
	Turn-on time.	2111
	Turn-on voltage.	2112
	Input current sensitivity.	2113
	Leakage current.	2114
	Transient voltage.	2115
	Waveform distortion.	2116
	Power dissipation.	2117

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.47	Terminal Strength	
	*Test methods (Select one)	
	Per 1006 document (see 5.4).	1409
	Per 1006 document except (see 5.4) ____	1410
	Per MIL-STD-202, Method 211.	1375
	*Test conditions (Select one or more)	
	Test condition A, applied force	
	(lb)	1411
	(N)	1419
	Test condition B, (no.) of bends.	1412
	Test condition C, load	
	(lb)	1413
	(kg)	1420
	Test condition D.	1414
	Test condition E, torque	
	(lb-in.)	1416
	(N·m)	1421

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.47 (Cont)	Terminal Strength (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1417
	Per 1006 document except (see 5.4) ____	1418
	As follows:	
	*No evidence of physical damage.	1433
	Remain within specified tolerance.	6296
5.48	Thermal Shock	
	*Test methods (Select one)	
	Per 1006 document (see 5.4).	4712
	Per 1006 document except (see 5.4) ____	4713
	Per MIL-STD-202, Method 107.	4714
	*Test condition (letter)	4715
	Special mounting per document from 5.7 (doc des)	4719
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	4720
	Per 1006 document except (see 5.4) ____	4722

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.48 (Cont)	*Requirements (Select one) (Cont)	
	As follows:	
	*No evidence of physical damage.	4723
	Remain within specified tolerance.	4726
	The relays shall conform to the requirements of the following tests:	
	Insulation resistance.	2118
	Dielectric withstanding voltage at sea level.	2119
	Turn-off time.	2120
	Turn-off voltage.	2121
	Turn-on time.	2122
	Turn-on voltage.	2123
	Input current sensitivity.	2124
	Leakage current.	2125
	Transient voltage.	2126
	Waveform distortion.	2127
	Power dissipation.	2128

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.49	Transient Voltage	
	*Test methods (Select one)	
	Per 1006 document (see 5.4).	1900
	Per 1006 document except (see 5.4) ____	1901
	Per MIL-R-28750.	1902
	Input voltage (V)	1903
	Bias voltage (V)	1905
	Output voltage (V)	1907
	Output current (mA)	1909
	Turn-off voltage (V)	1911
	Per MIL-STD-704.	
	Transient surge voltage	1914
	Transient surge curation (min)	1912
	Interval (s)	1913
	*Equipment (Category)	1915
	*Curve figure (No.)	1916

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.49 (Cont)	Per MIL-STD-704 (Cont)	
	Transient delineation	
	Output superpose voltage (Vrms)	1917
	Tolerance + (Vrms)	1918
	Tolerance - (Vrms)	1919
	Frequency (Hz)	1920
	Output superpose pulse voltage (Vdc)	1921
	Tolerance + (Vdc)	1922
	Tolerance - (Vdc)	1923
	Duration of superpose pulse (s)	1924
	Tolerance + (s)	1925
	Tolerance - (s)	1926
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1927
	Per 1006 document except (see 5.4) ____	1928
	As follows:	
	Output shall remain in the off condition.	1929

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.50	Turn-off Time	
	*Test methods (Select one)	
	Per 1006 document (see 5.4).	1935
	Per 1006 document except (see 5.4) ____	1936
	Per MIL-R-28750.	1937
	Control voltage (V)	1938
	Bias voltage (V)	1939
	Bias current (mA)	1940
	Contact voltage (V)	1941
	Contact current (mA)	1942
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1943
	Per 1006 document except (see 5.4) ____	1944
	As follows:	
	Maximum turn-off time (micros)	1945

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.51	Turn-Off Voltage	
	*Test methods (Select one)	
	Per 1006 document (see 5.4).	1950
	Per 1006 document except (see 5.4) ____	1951
	Per MIL-R-28750.	1952
	Control voltage (V)	1953
	Bias voltage (V)	1954
	Bias current (mA)	1955
	Contact voltage (V)	1956
	Contact current (mA)	1957
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1958
	Per 1006 document except (see 5.4) ____	1959
	As follows:	
	Minimum turn-off voltage (V)	1960

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.52	Turn-on Time	
	*Test methods (Select one)	
	Per 1006 document (see 5.4).	1965
	Per 1006 document except (see 5.4) ____	1966
	Per MIL-R-28750.	1967
	Control voltage (V)	1968
	Bias voltage (V)	1969
	Bias current (mA)	1970
	Contact voltage (V)	1971
	Contact current (mA)	1972
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1973
	Per 1006 document except (see 5.4) ____	1974
	As follows:	
	Maximum turn-on time (micros)	1975

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.53	Turn-on Voltage	
	*Test methods (Select one)	
	Per 1006 document (see 5.4).	1980
	Per 1006 document except (see 5.4) ____	1981
	Per MIL-R-28750.	1982
	Bias voltage (V)	1984
	Bias current (mA)	1985
	Contact voltage (V)	1986
	Contact current (mA)	1987
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1988
	Per 1006 document except (see 5.4) ____	1989
	As follows:	
	Maximum turn-on voltage (V)	1990

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.54	Vibration, High Frequency	
	*Test methods (Select one)	
	Per 1006 document (see 5.4).	1445
	Per 1006 document except (see 5.4) ____	1446
	Per MIL-STD-202, Method 204.	1447
	*Test condition (letter)	1448
	Percent rated load applied (pct)	6200
	Method of mounting (Select one)	
	Any suitable mounting method.	4709
	Normal means.	4708
	Mount per document from 5.7 (doc des)	4707
	Method of determining mechanical resonance (Select one)	
	Visually by means of a strobotac.	1533
	Electrical output indicators.	1534
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1454
	Per 1006 document except (see 5.4) ____	1455

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.54 (Cont)	*Requirements (Select one) (Cont)	
	As follows:	
	*No evidence of physical damage.	1456
	Remain within specified tolerance.	1469
	The relays shall conform to the requirements of the following tests:	
	Insulation resistance.	2129
	Dielectric withstanding voltage at sea level.	2130
	Turn-off time.	2131
	Turn-off voltage.	2132
	Turn-on time.	2133
	Turn-on voltage.	2134
	Input current sensitivity.	2135
	Leakage current.	2136
	Transient voltage.	2137
	Waveform distortion.	2138
	Power dissipation.	2139

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.55	Vibration, Low Frequency	
	*Test methods (Select one)	
	Per 1006 document (see 5.4).	1465
	Per 1006 document except (see 5.4) ____	1466
	Per MIL-STD-202, Method 201.	1467
	Duration of vibration per axis if other than 2 hours (hr)	1470
	Method of mounting (Select one)	
	Any suitable mounting method.	4731
	Normal mounting means.	4730
	Mount per document from 5.7 (doc des)	4729
	Direction of motion	
	Parallel to longitudinal axis.	1535
	Perpendicular to longitudinal axis.	1536
	On the centerline of most sensitive axis.	4979
	90 degrees from the centerline of the most sensitive axis.	4978
	Three mutually perpendicular axes.	1537
	Percent rated load applied (pct)	6201

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.55 (Cont)	Vibration, Low Frequency (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1474
	Per 1006 document except (see 5.4) ____	1475
	As follows:	
	*No evidence of physical damage.	1476
	Remain within specified tolerance.	1480
	The relays shall conform to the requirements of the following items:	
	Insulation resistance.	2140
	Dielectric withstanding voltage at sea level.	2141
	Turn-off time.	2142
	Turn-off voltage.	2143
	Turn-on time.	2144
	Turn-on voltage.	2145
	Input current sensitivity.	2146
	Leakage current.	2147
	Transient voltage.	2148
	Waveform distortion.	2149
	Power dissipation.	2150

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.56	Vibration, Random	
	*Test methods (Select one)	
	Per 1006 document (see 5.4).	1425
	Per 1006 document except (see 5.4) ____	1426
	Per MIL-STD-202, Method 214.	1427
	*Test condition (Roman numeral and letter)	1428
	*Duration of application (Select one)	
	(min)	1438
	(hr)	1431
	Monitoring instrumentation of excitation (Select one)	
	Any suitable system.	1452
	Calibrated ac to dc converter and strip chart recorder.	1453
	Calibrated oscilloscope.	1459
	Number of vibration monitoring test points (quantity)	1430

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.56 (Cont)	Per MIL-STD-202, Method 214. (Cont)	
	Location of monitoring points (Select one)	
	Any suitable location.	1439
	As close as practical to test specimen.	1462
	Percent of rated load applied (pct)	4678
	Method of mounting (Select one)	
	Any suitable mounting method.	4977
	Normal mounting method.	4976
	Mount per document from 5.7 (doc des)	4975
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1434
	Per 1006 document except (see 5.4) ____	1435
	As follows:	
	*No evidence of physical damage.	1436
	Remain within specified tolerance.	1538

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.56 (Cont)	As follows: (Cont)	
	The relays shall conform to the requirements of the following tests:	
	Insulation resistance.	2151
	Dielectric withstanding voltage at sea level.	2152
	Turn-off time.	2153
	Turn-off voltage.	2154
	Turn-on time.	2155
	Turn-on voltage.	2156
	Input current sensitivity.	2157
	Leakage current.	2158
	Transient voltage.	2159
	Waveform distortion.	2160
	Power dissipation.	2161

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.57	Waveform Distortion	
	*Test methods (Select one)	
	Per 1006 document (see 5.4).	2000
	Per 1006 document except (see 5.4) ____	2001
	Per MIL-R-28750.	2002
	Control voltage (V)	2003
	Bias voltage (V)	2004
	Bias current (mA)	2005
	Contact voltage (V)	2006
	Contact current (mA)	2007
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	2008
	Per 1006 document except (see 5.4) ____	2009
	As follows:	
	Maximum output waveform distortion (Select one)	
	(Vrms)	2010
	(V peak-to-peak)	2011

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.57 (Cont)	As follows: (Cont)	
	Minimum steady state output voltage (Vrms)	2012
	Minimum output voltage immediately prior to conduction (Vrms)	2013

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 6

USE OF AEDPS

6.1 Procedure

The step by step procedure contained in MIL-STD-35 is applicable to Solid-state Relays.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 7

FIGURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

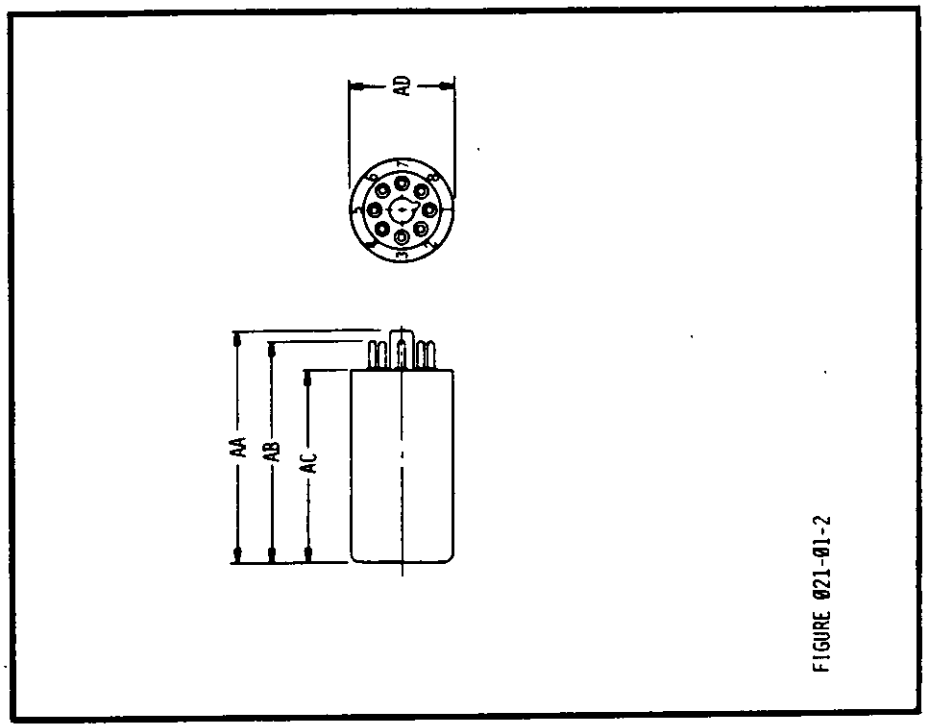


FIGURE 021-01-2

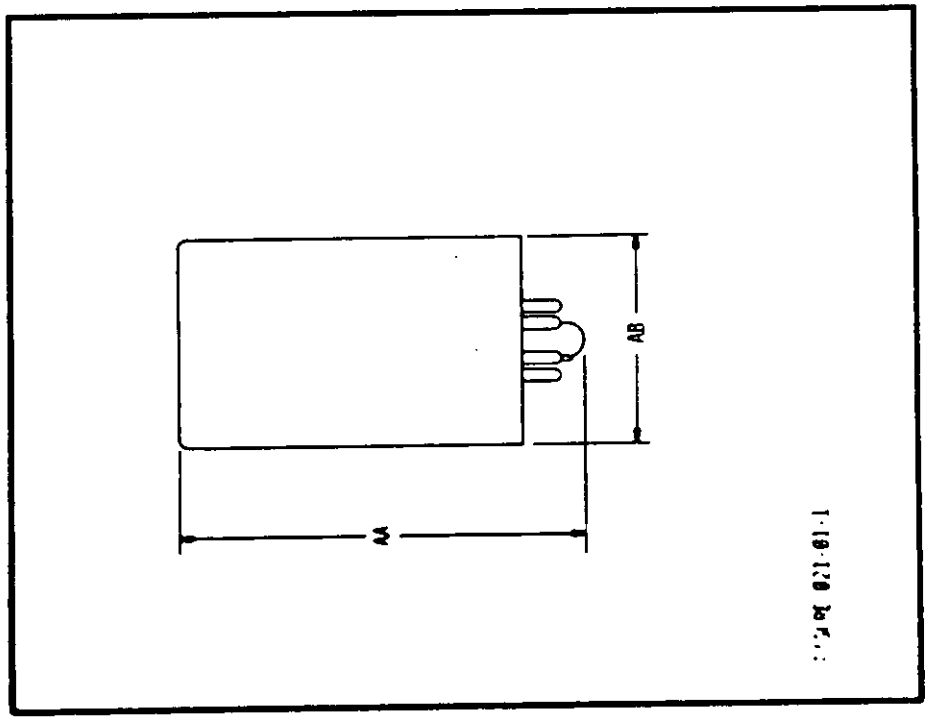


FIGURE 021-01-1

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

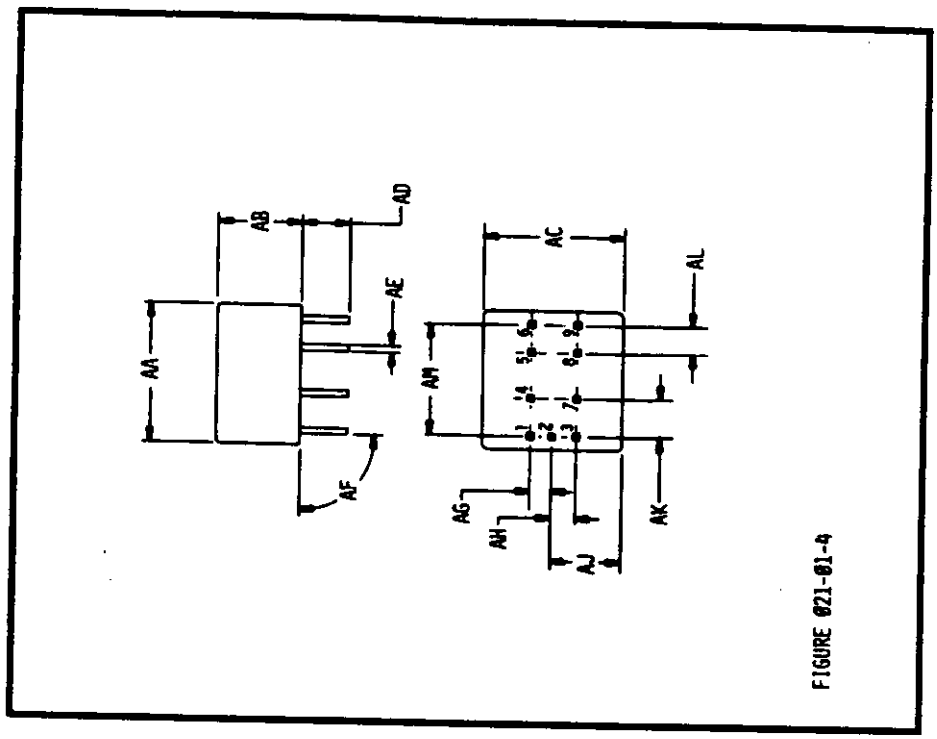


FIGURE 021-01-4

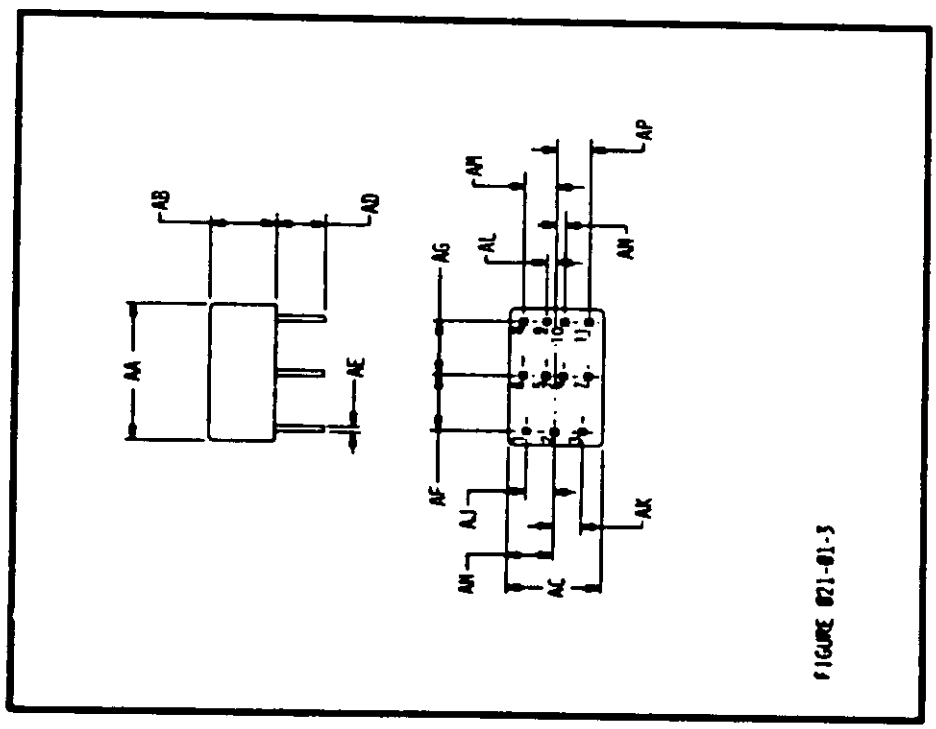


FIGURE 021-01-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

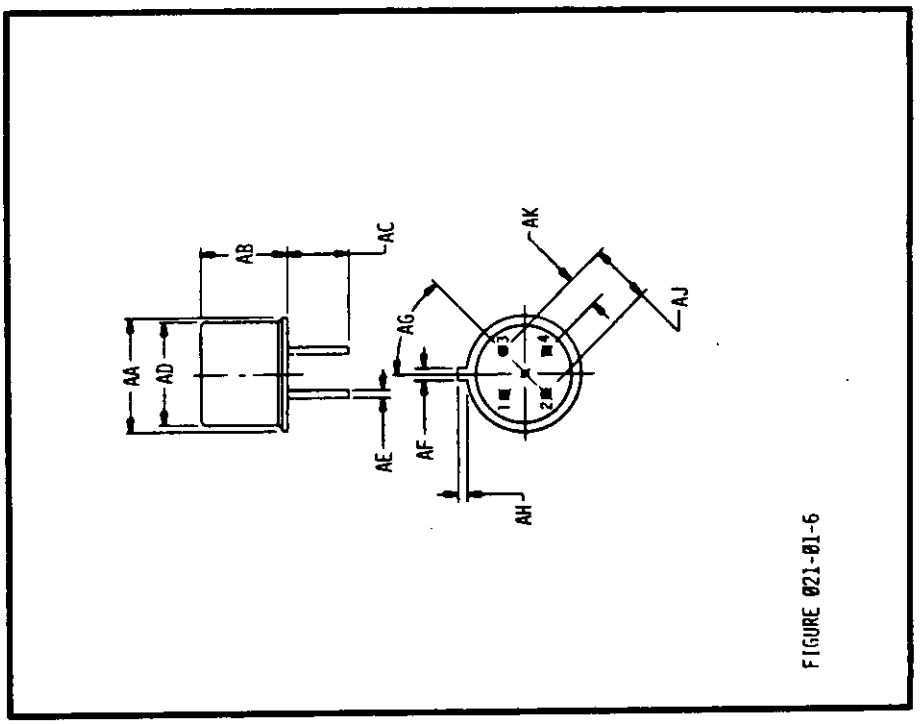


FIGURE 021-01-6

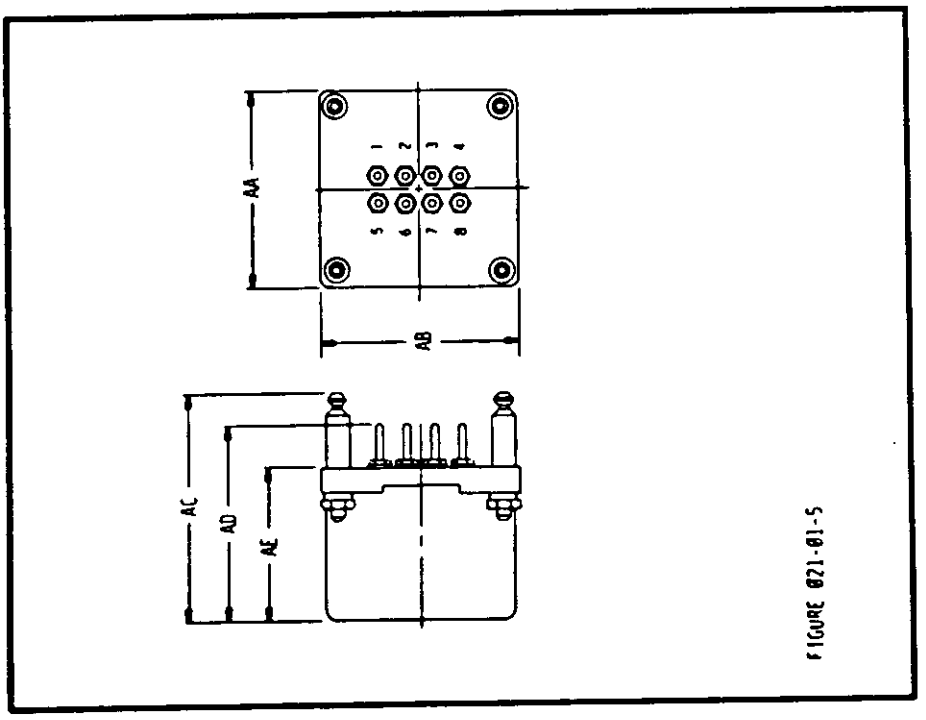


FIGURE 021-01-5

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 8

TABLES

Tables contained in MIL-STD-35 are applicable to Solid-State Relays.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. ELECTRICAL CHARACTERISTICS
(See 5.9)

ELECTRICAL CHARACTERISTICS TABLE

	RATED	MINIMUM	MAXIMUM
CONTROL VOLTAGE (VDC)	4000	4001	4002
CONTROL CURRENT (MILLIA)	4003	4004	4005
TURN-ON TIME (MICROSEC)	4006	4007	4008
KEYING RATE (BAUD)	4009	4010	4011
TURN-OFF VOLTAGE (VDC)	4012	4013	4014
TURN-OFF TIME (MICROSEC)	4015	4016	4017
BIAS VOLTAGE (VDC)	4018	4019	4020
BIAS CURRENT (MILLIA)	4021	4022	4023
CONTACT VOLTAGE (VDC)	4024	4025	4026
CONTACT VOLTAGE (VRMS)	4027	4028	4029
CONTACT VOLTAGE (VPEAK)	4030	4031	4032
CONTACT FREQUENCY (HZ)	4033	4034	4035
CONTACT CURRENT (A)	4036	4037	4038
	*7	*7	*7

*Number of print characters per column (column width). Heading spans are shown by underlining. Number of print characters, will not appear on the generated document.

Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective cells. Only those lines from which codes are used will print. The table will appear in Section 3 of the MSE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE II. ISOLATION - OVERDRIVE AND OVERLOAD
(See 5.32)

ISOLATION - OVERDRIVE AND OVERLOAD TABLE

INPUT CUR (MILLIA)	INPUT V (V)	CONT CUR (MILLIA)	CONT V (V)	INPUT INTVL (S)	FROM TERM DES	TO TERM DES	MIN ISLN R (MOHM)
4100	4101	4102	4103	4104	4105	4106	4107
4108	4109	4110	4111	4112	4113	4114	4115
4116	4117	4118	4119	4120	4121	4122	4123
4124	4125	4126	4127	4128	4129	4130	4131
4132	4133	4134	4135	4136	4137	4138	4139
4140	4141	4142	4143	4144	4145	4146	4147
4148	4149	4150	4151	4152	4153	4154	4155
4156	4157	4158	4159	4160	4161	4162	4163
4164	4165	4166	4167	4168	4169	4170	4171
4172	4173	4174	4175	4176	4177	4178	4179
4180	4181	4182	4183	4184	4185	4186	4187
4188	4189	4190	4191	4192	4193	4194	4195
4196	4197	4198	4199	4200	4201	4202	4203
4204	4205	4206	4207	4208	4209	4210	4211
4212	4213	4214	4215	4216	4217	4218	4219
4220	4221	4222	4223	4224	4225	4226	4227
4228	4229	4230	4231	4232	4233	4234	4235
4236	4237	4238	4239	4240	4241	4242	4243
4244	4245	4246	4247	4248	4249	4250	4251
4252	4253	4254	4255	4256	4257	4258	4259
*6 TEST	*6 TEST	*6 TEST	*6 TEST	*6 TEST	*6 TEST	*6 TEST	*6 REQT

*Number of print characters per column (column width). Heading spans are shown by underlining. Column parameters are indicated as either test or requirement at the end of each column. Number of print characters, "TEST", or "REQT" will not appear on the generated document.

Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective cells. Only those lines from which codes are used will print. The table will appear in Section 4 of the MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE III. TEMPERATURE RATING

(See 5.15)

TEMPERATURE RATING TABLE

	DEGREES CELSIUS		
TYPE OF TEMPERATURE	MINIMUM	NOMINAL	MAXIMUM
AMBIENT OPERATING	5052	5053	5054
AMBIENT NONOPERATING	5055	5056	5057
STORAGE	7301	5048	7302
	*7	*7	*7

*Number of print characters per column (column width). Heading spans are shown by underlining. Number of print characters will not appear on the generated document.

Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective cells. Only those lines from which codes are used will print. The table will appear in Section 3 of the MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of MIL-STD-35-101(MI), dated 10 May 1976 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Custodians:
Army-MI

Review Activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User Activity:
Army-MU

Preparing Activity:
Army-MI
Project EDS-A118

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
U.S. Army Missile Command
ATTN: DRSMI-RCS
Redstone Arsenal, Alabama 35809

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI – Optional)*	b. WORK TELEPHONE NUMBER *(Include Area Code – Optional)*
c. MAILING ADDRESS *(Street, City, State, ZIP Code – Optional)*	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.