MIL-STD-35-102(MI)
15 MARCH 1976

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

PRINTED WIRING, FLEXIBLE

FSC-EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL COMMAND
WASHINGTON, D.C. 20315

Automated Engineering
Document Preparation System,
Printed Wiring, Flexible

MIL-STD-35-102(MI)

1. This Military Standard is approved by the U.S. Army Materiel Command, Department of the Army, and is approved for use by all its activities. All other military activities are required to employ this standard where suitable.

2. Recommended corrections, additions or deletions should be addressed to Commander, U.S. Army Missile Command, ATTN: DRSMI-RCS, Redstone Arsenal, Alabama 35809.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

MIL-STD-35-102(MI)

FOREWORD

1. The purpose of MIL-STD-35-102(MI) is to facilitate the preparation of Military Specification Exceptions for Flexible Printed Wiring.

2. To properly utilize this document, it is necessary to have a complete and thorough understanding of the basic MIL-STD-35.

3. It is important that the procedure described in the basic document (MIL-STD-35C) and subsequent revisions be followed explicitly for the computer to produce a document suitable for competitive procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of MIL-STD-35C. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS

SECTION	TITLE	INSTR PAGE
SECTION 1	INTRODUCTION	1-1
1.1	Scope	1-1
1.2	Purpose	1-1
1.3	Format	1-1
1.4	Military Specification, Exception Title Index	1-2
1.4.1	Title	1-2
1.4.2	Index	1-3
SECTION 2	APPLICABLE DOCUMENTS	2-1
SECTION 3	DEFINITIONS	3-1
SECTION 4	GENERAL DESCRIPTION OF AEDPS	4-1
SECTION 5	DETAILED DESCRIPTION OF AEDPS	5-1
5.1	Introduction	5-1
5.2	Specification Requirement Sheet (SRS)	5-1
5.3	Specification Requirements	5-1
5.3.1	Mandatory Specification Requirements	5-1
5.4	Code 1006 Requirements and Test Methods	5-2
5.5	Approved Item Name Code	5-2
5.6	Dimensions and Figures	5-3
5.7	Applicable Documents	5-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS (CONT)

SECTION	TITLE	INSTR PAGE	SRL PAGE
5.8	Tabulation	5-5	
5.9	Conductor Width	5-5	5-28
5.10	Design and Construction	5-5	5-28
5.10.1	Classification	5-5	5-28
5.10.2	Conductor Spacing	5-6	5-28
5.10.3	Conductor Thickness	5-6	5-29
5.10.4	Conductor Weight	5-7	5-30
5.10.5	Extruded Adhesive Requirement	5-7	5-30
5.10.6	Laminate Thickness	5-7	5-30
5.10.7	Registration	5-7	5-31
5.10.8	Shielding	5-8	5-31
5.10.9	Trimmed Edges	5-8	5-32
5.11	Coverlayer to Circuit Bond (Delamination Criteria)	5-8	5-32
5.12	Termination Requirements	5-9	5-33
5.12.1	Bared Conductor Areas	5-9	5-33
5.12.2	Eyelets	5-9	5-34
5.12.3	Pins	5-10	5-34
5.12.4	Solder Coating	5-10	5-35
5.12.5	Terminal Holes	5-11	5-36

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS (CONT)

SECTION	TITLE	INSTR PAGE	SRL PAGE
5.13	Marking	5-11	5-37
5.14	Test Pattern	5-11	5-37
5.15	Altitude Range	5-12	5-38
5.16	Temperature Ratings	5-12	5-38
5.17	Conductor Edge Overhang	5-12	5-39
5.18	Continuity	5-13	5-39
5.19	Dielectric Withstanding Voltage at Reduced Barometric Pressure	5-14	5-40
5.20	Dielectric Withstanding Voltage at Sea Level	5-15	5-42
5.21	Flammability	5-16	5-43
5.22	Flexure Endurance	5-17	5-44
5.23	Folding	5-17	5-45
5.24	Fungus	5-18	5-46
5.25	Insulation Flaws	5-19	5-47
5.26	Insulation Resistance	5-19	5-47
5.27	Low Pressure (Temperature)	5-21	5-49
5.28	Moisture Resistance	5-22	5-50
5.29	Peel Strength	5-23	5-52
5.30	Solderability	5-24	5-53

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS (CONT)

SECTION	TITLE	INSTR PAGE	SRL PAGE
5.31	Stiffener Bond Strength	5-24	5-54
5.32	Terminal Area Bond Strength	5-25	5-55
5.33	Thermal Shock	5-26	5-56
5.34	Thickness of Solder or Platings	5-27	5-57
SECTION 6	USE OF AEDPS	6-1	
SECTION 7	FIGURES	7-1	
SECTION 8	TABLES	8-1	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT
PREPARATION SYSTEM (AEDPS)

FLEXIBLE PRINTED WIRING

SECTION 1

INTRODUCTION

1.1 Scope

This dash-numbered part of the Automated Engineering Document Preparation System, MIL-STD-35, covers detailed requirements of Flexible Printed Wiring.

1.2 Purpose

The purpose of this dash-numbered part of MIL-STD-35 is to provide a requester necessary information to properly prepare a request for a Flexible Printed Wiring Military Specification, Exception (MSE).

1.3 Format

The requester will find it impossible to complete an SRS using only this dash numbered part of MIL-STD-35. Specification Requirements which are standard for all generic families have been included in the master document at the issuance of MIL-STD-35C. These specification requirements are not repeated in each dash-numbered part. The following list contains subjects from MIL-STD-35 which are pertinent to every dash-numbered part unless otherwise excepted.

General Description of AEDPS
Part Numbering
Specification Requirements Sheet
Writing Methodology
Mandatory Specification Requirements
General Specification Requirements

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Dimensions and Drawings
Applicable Documents
Materials
Finishes
Inspections
Single and Multi-item Specifications (Tabulation)
Sources
Search
General Instructions for SRL
Tables

1.4 Military Specification, Exception Title Index

1.4.1 Title

The title of a generated MSE must be selected from one of the MSE titles listed in the Military Specification Exception Title Index (see 1.4.2). If a suitable MSE title is not found in the Index, a request should be forwarded to USAMICOM, ATTN: DRSMI-RCS, along with the desired title, and a related document. A code will be assigned and the code, title, and related document will be made a part of the Index. The requester will be notified of the assigned code.

One of the six-digit characteristic value codes, listed as Codes in the Index, entered on a Specification Requirements Sheet (SRS), will specify that the title of the MSE will be the title shown with that code in the Index.

Each MSE title listed in the Index is compatible with the document(s) listed with that title under Related Document. The list of related documents may or may not be a complete listing. The information contained under Related Document Coverage is intended for the requester's reference; when more than one document is listed for a MSE title, this information will be found useful in determining which of the documents is most suitable for use as the applicable general specification. When no document is listed under Related Document, exception may be taken to the most appropriate document listed in the Index under any other MSE title.

The MSE title may or may not be the same as the title used in DODISS, FIIG or the document to which the MSE document was written. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist a designer in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of devices. If the item

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

selected from the AEDPS document becomes an item of supply, then the Cataloging Handbook H6 nomenclature must be used. Under each MSE title is the applicable FIIG Item Name Code from Cataloging Handbook H6 and the Federal Stock Class from the Standardization Directory (SD-1).

Documents referenced in the MSE that will be listed in the Applicable Documents paragraph (2.1) of the MSE will be identified by the exact title that appears on the referenced document. Titles of MSE's, titles from DODISS, or titles from FIIG's will not be entered in paragraph 2.1.

1.4.2 Index

MSE Title: Printed Cable Assembly, Flexible — Code 461001
Federal Stock Class 6145
FIIG Item Name Code 61910

Related Document	
Number	Coverage
MIL-C-55543	Etched, Flat Cable

MSE Title: Printed Wiring, Flexible — Code 461002
Federal Stock Class 5999
FIIG Item Name Code 77777

Related Document	
Number	Coverage
MIL-P-50884	Single or Double Sided Flexible Wiring

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 2

APPLICABLE DOCUMENTS

The following documents form a part of this Standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-P-50884	Printed Wiring, Flexible
MIL-C-55543	Cable, Electrical, Flat Multiconductor, Flexible, Unshielded

STANDARDS

MILITARY

MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-810	Environmental Test Methods

OTHER PUBLICATIONS

ASTM E380	Metric Practice Guide
IPC-FC-240	Specification for Single-Sided Flexible Wiring

(Copies of Standards and Handbooks required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 3

DEFINITIONS

Definitions contained in MIL-STD-35 are applicable to Flexible Printed Wiring.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 4

GENERAL DESCRIPTION OF AEDPS

The general description of AEDPS contained in MIL-STD-35 is applicable to Flexible Printed Wiring.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 5

DETAILED DESCRIPTION OF AEDPS

5.1 Introduction

The detailed description of AEDPS applicable to Flexible Printed Wiring consists of the following:

a. The detailed description of AEDPS specified in MIL-STD-35.

b. The additional detailed description contained in this section.

5.2 Specification Requirement Sheet (SRS)

Specification Requirement Sheet (SRS) requirements described in MIL-STD-35 and at the end of this dash numbered part are applicable to Flexible Printed Wiring.

5.3 Specification Requirements

All specification requirements described in MIL-STD-35 are applicable to Flexible Printed Wiring.

Refer to ASTM E380 for guidance in using the International System of Units (SI).

5.3.1 Mandatory Specification Requirements

In addition to the mandatory specification requirements of MIL-STD-35, some of the specification requirements described herein are mandatory and shall be entered on the SRS of each request for a MSE. If one or more of these mandatory characteristics are omitted from a request, one or more important details will not be included in the MSE.

Mandatory specification requirements consist of all those listed in MIL-STD-35 and one or both of the following:

CHARACTERISTICS	CHARACTERISTIC CODE
Minimum conductor width	1570 or 1572, or both

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.4 Code 1006 Requirements and Test Methods

Many requirements and test methods are shown on the SRL as "Requirements per 1006 document" or "Test per 1006 document" with an adjacent code for each. The adjacent code, entered on the SRS with an "X", will cause the MSE to state that the requirement or test method be in accordance with the document to which exception is being taken.

Similarly, many requirements and test methods are shown on the SRL as "Requirements per 1006 document except" or "Test per 1006 document except" with an adjacent code for each. This adjacent code, entered on the SRS with the exact words desired to complete the statement shown, will specify a complete statement. Only the words required to complete the statement after the "except" are entered on the SRS (Example 1).

CHAR CODE 13 14 15 16	CHARACTERISTIC VALUE 20 25 30 35 40 45 50 55 60
5402	THERMAL SHOCK SHALL BE 175 DEG C HIGH TEMP#

EXAMPLE 1

In Example 1, the code and entry will generate a paragraph as follows:

"GROUP A INSPECTION. GROUP A INSPECTION SHALL BE PERFORMED AS SPECIFIED IN THE SPECIFICATION REFERENCED IN 3.1 EXCEPT THERMAL SHOCK SHALL BE 175 DEG C HIGH TEMP."

The test method per 1006 code and requirements per 1006 code from the same test shall not be used together. This condition would indicate no exception is being specified. If a test method code(s) has been selected, it is mandatory that a requirement code be selected; and if a requirement code has been selected, it is mandatory that a test method code(s) be selected.

5.5 Approved Item Name Code

The approved item name code to be entered on the SRS with Code 1007 for flexible printed wiring is selected from the following list:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPROVED ITEM NAME	ITEM NAME CODE
Flexible Printed Cable Assembly	61910
Unapproved Name	77777

Only the Item Name Code number is entered on the SRS with Code 1007.

5.6 Dimensions and Figures

All specification requirements for dimensions and figures described in MIL-STD-35 are applicable.

The figures applicable to flexible printed wiring are contained in Section 7. It is mandatory to enter on the SRS Code 1009 and a figure number.

5.7 Applicable Documents

The documents listed in the Applicable Document List of Section 5 of MIL-STD-35 and appropriate codes from Table B of MIL-STD-35 shall be entered on the SRS. In addition, the appropriate documents shown in the DOCUMENTS column below and the applicable codes from Table B of MIL-STD-35 shall be entered on the SRS when the codes listed in the CODES column are used to specify tests or requirements. Shown parenthetically in the CODES column is a reference to the applicable test or requirement. A document designation, with a code from Table B, is entered on the SRS only once.

DOCUMENTS	CODES
MIL-P-50884	1654 (Conductor edge overhang) 1674 (Continuity) 1724 (Peel strength) 1754 (Solderability) 1774 (Stiffener bond strength) 1804 (Terminal area bond strength) 1844 (Thickness of solder or platings)
MIL-C-55543	2004 (Flammability) 2024 (Flexure endurance) 2044 (Folding) 2064 (Insulation flaws) 2084 (Low pressure, temperature)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DOCUMENTS (CONT)	CODES (CONT)
MIL-STD-130	1950 (Marking)
MIL-STD-202	1397 (Moisture resistance) 1511 (Insulation resistance) 4714 (Thermal shock) 4862 (DWV at sea level) 6300 (DWV at reduced barometric pressure)
MIL-STD-810	4755 (Fungus)
IPC-FC-240	1864 (Flexure fatigue) 1967 (Test pattern) 2025 (Flexure endurance)
Document to which exception is taken	1006

In addition, when the codes listed below are used to specify mounting or special preparations in accordance with a document, the document number with an appropriate code from Table B of MIL-STD-35 must be entered on the SRS.

1449 Moisture resistance, mounting
1952 Marking
4719 Thermal shock, mounting
4850 DWV at sea level, preparation
4859 DWV at reduced barometric pressure, preparation
5000 DWV at sea level, mounting
6280 DWV at reduced barometric pressure, mounting

For these codes any document from the Index, 1.4.2, may be used to specify which test in the document contains applicable mounting or preparation requirements, enter on the SRS the test name and the document number (Example 2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE 13 14 15 16	CHARACTERISTIC VALUE 20 25 30 35 40 45 50 55 60
6280	MIL-P-50884, DWV-REDUCED BAROMETRIC PRESSURE#

EXAMPLE 2

Code 6280 in Example 2 specifies that the mounting in the DWV at reduced barometric pressure test, which is not in MIL-P-50884, shall be in accordance with the mounting in the DWV at sea level test.

5.8 Tabulation

All specification requirements for tabulation described in MIL-STD-35 are applicable.

Dimensions from Table A of MIL-STD-35 are the only candidates for tabulation which may be used with codes from the Specification Requirement Sheet Tabulation Table of MIL-STD-35.

5.9 Conductor Width

There are two codes available to specify the minimum conductor width in inches or millimetres, respectively. The use of one of these codes is mandatory to specify the minimum conductor width. The use of the other code is optional. Information concerning these codes is as follows:

Code 1570 or Code 1572, or both and a value(s), entered on the SRS, will specify the minimum conductor width in inches or millimetres, respectively.

5.10 Design and Construction

5.10.1 Classification

There are two codes available to specify classification in accordance with the 1006 document. Neither of these codes is mandatory. These codes and information concerning them are as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1573 and a letter, entered on the SRS, will specify the type letter in accordance with the 1006 document.

Code 1574 and a number, entered on the SRS, will specify the class number in accordance with the 1006 document.

5.10.2 Conductor Spacing

There are eight codes available to specify conductor spacing requirements. Two codes are applicable to minimum center-to-center conductor spacing requirements and two codes are applicable to nominal center-to-center conductor spacing. If a tolerance to the nominal spacing is required, two codes are available. Two codes are applicable to minimum spacing from a conductor to the edge of the flexible printed wiring.

Code 1576 or Code 1577, or both and a value(s), entered on the SRS, will specify the minimum conductor spacing in inches or millimetres, respectively.

Code 1579 or Code 1580, or both and a value(s), entered on the SRS, will specify the nominal conductor spacing in inches or millimetres, respectively.

Code 1582 or Code 1583, or both and a value(s), entered on the SRS, will specify the conductor spacing tolerance in inches or millimetres, respectively. Do not use Code 1582 or 1583 unless Code 1579 or 1580 has been used.

Code 1585 or Code 1586, or both and a value(s), entered on the SRS, will specify the minimum spacing from a conductor to the edge of the flexible printed wiring in inches or millimetres, respectively.

5.10.3 Conductor Thickness

Code 1588 or Code 1589, or both and a value(s), entered on the SRS, will specify the nominal conductor thickness in inches or millimetres, respectively.

Code 1592 or Code 1593, or both and a value(s), entered on the SRS, will specify the conductor thickness tolerance in inches or millimetres, respectively.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.10.4 Conductor Weight

Code 1598 and a value, entered on the SRS, will specify the conductor weight in ounces per square foot.

Code 1599 and a value, entered on the SRS, will specify the conductor weight in kilograms per square metre.

5.10.5 Extruded Adhesive Requirement

Code 1602 or Code 1604, or both and a value(s), entered on the SRS, will specify that extruded adhesive on terminal areas shall not be within the specified inches or millimetres, respectively, from plated through holes.

Code 1606 or Code 1608, or both and a value(s), entered on the SRS, will specify that extruded adhesive on terminal areas shall not be within the specified inches or millimetres, respectively, from unsupported holes.

5.10.6 Laminate Thickness

Code 1610 or Code 1611, or both and a value(s), entered on the SRS, will specify the minimum base dielectric thickness in inches or millimetres, respectively.

Code 1613 or Code 1614, or both and a value(s), entered on the SRS, will specify the minimum coverlayer thickness in inches or millimetres, respectively.

5.10.7 Registration

Code 1616 and a value, entered on the SRS, will specify the registration required between circuit layers within a total indicator reading (TIR).

Code 1618 or Code 1619, or both and a value(s), entered on the SRS, will specify registration in inches or millimetres, respectively, required between the center of a plated hole to the center of a clearance hole for circuit layers and coverlayer/stiffener boards.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.10.8 Shielding

Code 1620 and an "X", entered on the SRS, will specify that shielding shall be required on the flexible printed wiring.

Code 1622 or Code 1624, or both and a value(s), entered on the SRS, will specify the nominal shielding thickness in inches or millimetres, respectively.

Code 1626 or Code 1628, or both and a value(s), entered on the SRS, will specify the weight of the shielding material in ounces per square foot or kilograms per square metre, respectively.

5.10.9 Trimmed Edges

Code 1630 or Code 1632, or both and a value(s), entered on the SRS, will specify the maximum inside corner radius in inches or millimetres, respectively.

Code 1634 or Code 1636, or both and a value(s), entered on the SRS, will specify the maximum outside corner radius in inches or millimetres, respectively.

5.11 Coverlayer to Circuit Bond (Delamination Criteria)

There are ten codes available to specify permissible delamination criteria. Six codes are applicable to delamination criteria at random locations and four codes are applicable to delamination criteria along conductor edges. These codes and information concerning them are as follows:

Code 1638 or Code 1639, or both and a value(s), entered on the SRS, will specify the maximum delamination size in square inches or millimetres, respectively, allowed at random locations.

Code 1641 or Code 1642, or both and a value(s), entered on the SRS, will specify the minimum acceptable distance in inches or millimetres, respectively, that an acceptable delamination may be located from an access hole edge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1643 or Code 1644, or both and a value(s), entered on the SRS, will specify the minimum acceptable distance in inches or millimetres, respectively, that an acceptable delamination may be located from the flexible printed wiring edge.

Code 1646 or Code 1647, or both and a value(s), entered on the SRS, will specify the maximum delamination width in inches or millimetres, respectively, allowed along conductor edges.

Code 1648 or Code 1649, or both and a value(s), entered on the SRS, will specify the minimum acceptable distance in inches or millimetres, respectively, allowed from a conductor to a delamination along another conductor.

5.12 Termination Requirements

5.12.1 Bared Conductor Areas

Code 1897 and a value, entered on the SRS, will specify the minimum number of degrees that the coverlayer shall overlap the conductor pad.

Code 1898 or Code 1899, or both and a value(s), entered on the SRS, will specify the minimum circumferential lip of coverlayer in inches or millimetres, respectively, required over the conductor pad after baring of the pad.

Code 1900 or Code 1901, or both and a value(s), entered on the SRS, will specify the minimum diameter of the coverlayer access hole in inches or millimetres, respectively.

5.12.2 Eyelets

Code 1902 and a part number, entered on the SRS, will specify the eyelet part number required for the flexible printed wiring.

Code 1903 and a number, entered on the SRS, will specify the FSCM number of the eyelet manufacturer.

Code 1904 and a number, entered on the SRS, will specify the specification number for the eyelets.

Code 1906 and an "X", entered on the SRS, will specify that the terminal pad diameter shall be not less than the diameter of the eyelet flange.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1908 and a value, entered on the SRS, will specify the outer diameter of the eyelet flange shall be concentric with the outer diameter of the pad within the TIR value specified.

5.12.3 Pins

Code 1909 and a part number, entered on the SRS, will specify the part number of the pins for the flexible printed wiring.

Code 1910 and a number, entered on the SRS, will specify the FSCM number of the pin manufacturer.

Code 1911 and a number, entered on the SRS, will specify the specification number for the pins.

Code 1912 and an "X", entered on the SRS, will specify that pins shall be staked and soldered to the flexible printed wiring.

Code 1914 and an "X", entered on the SRS, will specify that welded-in pins shall be attached during manufacture of the flexible printed wiring.

5.12.4 Solder Coating

Code 1916 or Code 1918, or both and a value(s), entered on the SRS, will specify the minimum coating thickness on exposed conductor patterns in inches or millimetres, respectively. Code 1920 or Code 1922, or both, are mandatory if Code 1916 or Code 1918, or both, are used.

Code 1920 or Code 1922, or both and a value(s), entered on the SRS, will specify the maximum coating thickness on exposed conductor patterns in inches or millimetres, respectively. Code 1916 or Code 1918, or both, are mandatory if Code 1920 or Code 1922, or both, are used.

Code 1924 or Code 1926, or both and a value(s), entered on the SRS, will specify the minimum terminal hole coating thickness in inches or millimetres, respectively. Code 1928 or Code 1930, or both, are mandatory if Code 1924 or Code 1926, or both, are used.

Code 1928 or Code 1930, or both and a value(s), entered on the SRS, will specify the maximum terminal hole coating thickness in inches or millimetres, respectively. Code 1924 or Code 1926, or both, are mandatory if Code 1928 or Code 1930, or both, are used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1932 and an "X", entered on the SRS, will specify that pads shall be solder coated for reflow connections.

Code 1933 and an "X", entered on the SRS, will specify that exposed solder fingers shall be provided for reflow connections.

5.12.5 Terminal Holes

Code 1935 or Code 1937, or both and a value(s), entered on the SRS, will specify the minimum annular ring in inches or millimetres, respectively, required for nonplated through holes.

Code 1939 or Code 1940, or both and a value(s), entered on the SRS, will specify the minimum annular ring in inches or millimetres, respectively, required for plated through holes.

5.13 Marking

Code 1950 and an "X", entered on the SRS, will specify that the flexible printed wiring shall be marked in accordance with MIL-STD-130.

Code 1952 and a document designation, entered on the SRS, will specify that the flexible printed wiring shall be marked in accordance with the document (5.7).

Code 1953 and an "X", entered on the SRS, will specify that the part number shall be marked on the flexible printed wiring.

Code 1955 and an "X", entered on the SRS, will specify that the serial number shall be marked on the flexible printed wiring.

Code 1957 and an "X", entered on the SRS, will specify that the revision level shall be marked on the flexible printed wiring.

Code 1959 and an "X", entered on the SRS, will specify that the manufacturing trademark may be marked on the flexible printed wiring.

Code 1961 or Code 1963, or both and a value(s), entered on the SRS, will specify the height of the character marking in inches or millimetres, respectively.

5.14 Test Pattern

Code 1965 and an "X", entered on the SRS, will specify that an attached test pattern shall be furnished with the flexible printed wiring.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1967 and an "X", entered on the SRS, will specify that the test pattern shall be furnished per IPC-FC-240.

Code 1969 and a value, entered on the SRS, will specify the number of test patterns that shall be furnished per lot.

5.15 Altitude Range

Code 5060 or Code 5061, or both and a value(s), entered on the SRS, will specify the operating altitude range from sea level to the value specified in feet or metres, respectively.

Code 5062 or Code 5063, or both and a value(s), entered on the SRS, will specify the nonoperating altitude range from sea level to the value specified in feet or metres, respectively.

5.16 Temperature Ratings

Code 5068 and a value, entered on the SRS, will specify the minimum operating temperature in degrees Celsius.

Code 5069 and a value, entered on the SRS, will specify the maximum operating temperature in degrees Celsius.

Code 5070 and a value, entered on the SRS, will specify the minimum nonoperating temperature in degrees Celsius.

Code 5071 and a value, entered on the SRS, will specify the maximum nonoperating temperature in degrees Celsius.

5.17 Conductor Edge Overhang

Code 1650 is the 1006 test code (5.4).

Code 1652 is the 1006 except test code (5.4).

Code 1654 and an "X", entered on the SRS, will specify to test in accordance with MIL-P-50884.

Code 1660 is the 1006 requirement code (5.4).

Code 1662 is the 1006 except requirement code (5.4).

Code 1663 and an "X", entered on the SRS, will specify there shall be no overhang on conductor edges.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1664 and an "X", entered on the SRS, will specify the maximum permissible overhang shall not exceed the base metal thickness.

5.18 Continuity

Code 1670 is the 1006 test code (5.4).

Code 1672 is the 1006 except test code (4.4).

Code 1674 and an "X", entered on the SRS, will specify to test in accordance with MIL-P-50884.

Code 1675 and a value, entered on the SRS, will specify a low temperature exception in degrees Celsius to step (d) of MIL-P-50884. Code 1676 is mandatory if Code 1675 is used.

Code 1676 and a value, entered on the SRS, will specify the low temperature tolerances in plus or minus degrees Celsius.

Code 1677 and a value, entered on the SRS, will specify a high temperature exception in degrees Celsius to step (e) of MIL-P-50884. Code 1678 is mandatory if Code 1677 is used.

Code 1678 and a value, entered on the SRS, will specify a high temperature tolerance in plus or minus degrees Celsius.

To detail the circuit paths required for circuit resistance measurements, codes from the Circuit Resistance Measurement Table (Table I) may be used. These codes and information concerning them are as follows:

Code 2400 and a value, entered on the SRS, will specify the circuit path number that shall be measured.

Code 2401 and a value, entered on the SRS, will specify the Code 1009 figure hole number designation where the circuit path shall begin.

Code 2402 and a value, entered on the SRS, will specify the Code 1009 figure hole number designation where the circuit path shall end.

The remaining lines in Table I may be used in a similar manner to specify 25 circuit paths.

Code 1680 is the 1006 requirement code (5.4).

Code 1682 is the 1006 except requirement code (5.4).

Code 1684 and a value, entered on the SRS, will specify the maximum circuit resistance in ohms for any circuit on the flexible printed wiring.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.19 Dielectric Withstanding Voltage at Reduced Barometric Pressure

Code 4883 is the 1006 test code (5.4).

Code 4884 is the 1006 except test code (5.4).

To detail a dielectric withstanding voltage test at reduced barometric pressure, Codes 6300 and 4886, and either Code 4849 or 4885, are mandatory. Other codes are optional. Information concerning them is as follows:

Code 6300 and an "X", entered on the SRS, will specify the dielectric withstanding voltage test in accordance with Method 301 of MIL-STD-202 shall be performed at reduced barometric pressure.

Code 4886 and a letter, entered on the SRS, will specify the altitude shall be as specified in test condition letter Method 105 of MIL-STD-202.

Code 4885 and a value, entered on the SRS, will specify dc test voltage. Do not use Code 4885 with Code 4849.

Code 4849 and a value, entered on the SRS, will specify ac test voltage. Do not use Code 4849 with Code 4885.

Code 1690 and an "X", entered on the SRS, will specify the test voltage shall be applied between adjacent conductors.

Code 1692 and an "X", entered on the SRS, will specify the test voltage shall be applied between each circuit with respect to each other circuit.

Code 4859 and a document designation, entered on the SRS, will specify special preparations in accordance with the document (5.7).

Code 6280 and a document designation, entered on the SRS, will specify mounting in accordance with the document (5.7).

Code 4891 and a value, entered on the SRS, will specify duration in seconds of voltage application. This code is used only if duration required is other than 60 seconds.

Code 4907 is the 1006 requirement code (5.4).

Code 4908 is the 1006 except requirement code (5.4).

To detail requirements, Code 4906 is mandatory and others are optional. Information concerning them is as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 4906 and an "X", entered on the SRS, will specify there shall be no evidence of flashover, mechanical damage, arcing, or insulation breakdown after test.

Code 4901 and an "X", entered on the SRS, will specify the device shall remain within specified tolerance after test.

Code 4894 and a value, entered on the SRS, will specify maximum leakage current in milliamperes.

5.20 Dielectric Withstanding Voltage at Sea Level

Code 4860 is the 1006 test code (5.4).

Code 4861 is the 1006 except test code (5.4).

To detail a test method for dielectric withstanding voltage test at sea level, Code 4862 and either Code 4854 or 4855 are mandatory. Other codes are optional. Information concerning them is as follows:

Code 4862 and an "X", entered on the SRS, will specify to test in accordance with Method 301 of MIL-STD-202.

Code 4854 and a value, entered on the SRS, will specify test dc voltage. Do not use Code 4854 with Code 4855.

Code 4855 and a value, entered on the SRS, will specify test ac voltage. Do not use Code 4855 with Code 4854.

Code 1696 and an "X", entered on the SRS, will specify test voltage shall be applied between adjacent conductors.

Code 1698 and an "X", entered on the SRS, will specify test voltage shall be applied between each circuit with respect to each other circuit

Code 4850 and a document designation, entered on the SRS, will specify special preparations in accordance with the document (5.7).

Code 5000 and a document designation, entered on the SRS, will specify mounting in accordance with the document (5.7).

Code 4867 and a value, entered on the SRS, will specify duration in seconds of voltage application. This code is used only if duration required is other than 60 seconds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 4873 is the 1006 requirement code (5.4).

Code 4874 is the 1006 except requirement code (5.4).

To detail requirements for the dielectric withstanding voltage test at sea level, Code 4856 is mandatory; two other codes are optional. Information concerning them is as follows:

Code 4856 and an "X", entered on the SRS, will specify there shall be no evidence of flashover, mechanical damage, arcing, or insulation breakdown after test.

Code 4875 and a value, entered on the SRS, will specify the maximum leakage current in milliamperes.

Code 4847 and an "X", entered on the SRS, will specify the device shall remain within specified tolerance after test.

5.21 Flammability

Code 2000 is the 1006 test code (5.4).

Code 2002 is the 1006 except test code (5.4).

Code 2004 and an "X", entered on the SRS, will specify to test in accordance with MIL-C-55543.

Code 2010 is the 1006 requirement code (5.4).

Code 2012 is the 1006 except requirement code (5.4).

Code 2014 or Code 2016, or both and a value(s), entered on the SRS, will specify the maximum flame rate of travel in inches per minute or millimetres per minute, respectively.

Code 2018 and a value, entered on the SRS, will specify the time in seconds required for the flexible printed wiring to be self-extinguished.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.22 Flexure Endurance

Code 2020 is the 1006 test code (5.4).

Code 2022 is the 1006 except test code (5.4).

Code 2024 and an "X", entered on the SRS, will specify to test in accordance with MIL-C-55543.

Code 2025 and an "X", entered on the SRS, will specify to test in accordance with IPC-FC-240.

Code 2026 and a value, entered on the SRS, will specify the low test temperature in degrees Celsius.

Code 2028 and a value, entered on the SRS, will specify the high test temperature in degrees Celsius.

Code 2030 is the 1006 requirement code (5.4).

Code 2032 is the 1006 except requirement code (5.4).

Code 2034 and a value, entered on the SRS, will specify the minimum average number of bends.

Code 2036 and a value, entered on the SRS, will specify the maximum discontinuity in microseconds.

Code 2038 and a value, entered on the SRS, will specify the maximum noise magnitude in millivolts rms.

5.23 Folding

Code 2040 is the 1006 test code (5.4).

Code 2042 is the 1006 except test code (5.4).

Code 2044 and an "X", entered on the SRS, will specify to test in accordance with MIL-C-55543.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 2050 is the 1006 requirement code (5.4).

Code 2052 is the 1006 except requirement code (5.4).

Code 2054 and an "X", entered on the SRS, will specify there shall be no evidence of cracking, delamination or conductor failure.

Code 2056 and an "X", entered on the SRS, will specify there shall be no evidence of flashover or insulation breakdown when the Dielectric Withstanding Voltage test is performed.

5.24 Fungus

Code 4753 is the 1006 test code (5.4).

Code 4754 is the 1006 except test code (5.4).

To detail a fungus test, Code 4755 is mandatory. Code 4756 is optional.

Code 4755 and an "X", entered on the SRS, specifies to test in accordance with Method 508 of MIL-STD-810.

Code 4756 and a value, entered on the SRS, will specify duration of test in days (if other than 28 days).

Code 4759 is the 1006 requirement code (5.4).

Code 4760 is the 1006 except requirement code (5.4).

Code 4761 and an "X", entered on the SRS, will specify all external materials shall be nonnutrient to fungus growth or shall be suitably treated to retard fungus growth. The manufacturer shall verify by certification that all external materials are fungus resistant or shall perform the fungus test as specified. When the fungus test is performed, there shall be no evidence of fungus growth on the external surfaces.

Code 4762 and an "X", entered on the SRS, will specify all external materials shall be nonnutrient to fungus growth or shall be suitably treated to retard fungus growth. When the fungus test specified is performed, there shall be no evidence of fungus growth on the external surfaces.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.25 Insulation Flaws

Code 2060 is the 1006 test code (5.4).

Code 2062 is the 1006 except test code (5.4).

Code 2064 and an "X", entered on the SRS, will specify to test in accordance with MIL-C-55543. Code 2065 is mandatory if Code 2064 is used.

Code 2065 and a value, entered on the SRS, will specify the test voltage in volts rms.

Code 2070 is the 1006 requirement code (5.4).

Code 2072 is the 1006 except requirement code (5.4).

Code 2074 and an "X", entered on the SRS, will specify that no insulation flaws shall be allowed.

5.26 Insulation Resistance

Code 1370 is the 1006 test code (5.4).

Code 1371 is the 1006 except test code (5.4).

To detail an insulation resistance test, it is mandatory that Codes 1511 and Code 1378 or Code 1373 be entered on the SRS.

Code 1511 and an "X", entered on the SRS, will specify the insulation resistance test method shall be as specified in Method 302 of MIL-STD-202.

Code 1373 and a value, entered on the SRS, will specify the test voltage in volts dc shall be the value entered.

Code 1378 and a letter, entered on the SRS, will specify the applicable test condition letter from Method 302 of MIL-STD-202.

Code 1376 and a value, entered on the SRS, will specify the electrification time in seconds (if other than two minutes).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1377 and a value, entered on the SRS, will specify the maximum measurement error in percent permitted at the insulation resistance value required if other than 10 percent.

Code 1700 and an "X", entered on the SRS, will specify the points of application of test voltage shall be between adjacent conductors.

Code 1702 and an "X", entered on the SRS, will specify the points of application of test voltage shall be between each circuit with respect to each other circuit.

To detail the circuit paths required for insulation resistance measurements, codes from the Insulation Resistance Measurement Table (Table II) may be used. These codes and information concerning them are as follows:

Code 2500 and a value, entered on the SRS, will specify the circuit path number that shall be measured.

Code 2501 and a value, entered on the SRS, will specify the Code 1009 figure hole number designation where the circuit path shall begin.

Code 2502 and a value, entered on the SRS, will specify the Code 1009 figure hole number designation where the circuit path shall end.

The remaining lines may be used in a similar manner to specify a 25 circuit paths.

Code 1372 and a value, entered on the SRS, will specify the test temperature in degrees Celsius if other than as specified in MIL-STD-202 standard test conditions, or the first test temperature if the insulation resistance test is to be performed at two temperatures.

Code 1381 and a value, entered on the SRS, will specify the second test temperature in degrees Celsius when the insulation resistance test is to be performed at two temperatures.

Code 1383 and a value, entered on the SRS, will specify plus or minus test temperature tolerance in degrees Celsius.

To detail requirements for the insulation resistance test, Code 1407 is mandatory. The other codes are optional. Information concerning these codes is as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1407 and an "X", entered on the SRS, will specify there shall be no evidence of physical damage.

Code 1379 is the 1006 requirement code (5.4).

Code 1380 is the 1006 except requirement code (5.4).

Code 1384 and a value, entered on the SRS, will specify the insulation resistance in megohms at the first test temperature specified with Code 1372.

Code 1387 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms at the second test temperature specified with Code 1381.

Code 1386 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms when no temperature is specified with Codes 1372 or 1381.

Code 1388 and an "X", entered on the SRS, will specify the device shall remain within specified tolerance.

5.27 Low Pressure (Temperature)

Code 2080 is the 1006 test code (5.4).

Code 2082 is the 1006 except test code (5.4).

Code 2084 and an "X", entered on the SRS, will specify to test in accordance with MIL-C-55543. Code 2085 is mandatory if Code 2084 is used.

Code 2085 and a value, entered on the SRS, will specify the test temperature in degrees Celsius.

Code 2090 is the 1006 requirement code (5.4).

Code 2092 is the 1006 except requirement code (5.4).

To detail requirements, it is mandatory to use Code 2093. Other codes are optional. These codes and information concerning them are as follows:

Code 2093 and an "X", entered on the SRS, will specify there shall be no evidence of voids or delaminations.

Code 2095 or 2096, or both and a value(s), entered on the SRS, will specify the maximum shrinkage in inches or millimetres, respectively.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 2098 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms.

Code 2099 and an "X", entered on the SRS, will specify there shall be no evidence of flashover or insulation breakdown when the Dielectric Withstanding Voltage test is performed.

5.28 Moisture Resistance

Code 1390 is the 1006 test code (5.4).

Code 1391 is the 1006 except test code (5.4).

To detail a moisture resistance test, Code 1397 is mandatory; other codes are optional. Information concerning them is as follows:

Code 1397 and an "X", entered on the SRS, will specify to test in accordance with Method 106 of MIL-STD-202.

Code 4985 and an "X", entered on the SRS, will specify Step 7a of Method 106 of MIL-STD-202 is not applicable.

Code 4986 and an "X", entered on the SRS, will specify Step 7b of Method 106 of MIL-STD-202 is not applicable.

Code 1449 and a document designation, entered on the SRS, will specify mounting in accordance with the document (5.7).

Code 4983 and an "X", entered on the SRS, will specify the dielectric withstanding voltage test at sea level shall be performed at high humidity.

Code 4984 and an "X", entered on the SRS, will specify the dielectric withstanding voltage test at sea level shall be performed after drying.

Code 1399 is the 1006 requirement code (5.4).

Code 1400 is the 1006 except requirement code (5.4).

To detail requirements, there are seven codes applicable to the moisture resistance test. Only Code 1396 is mandatory. Information concerning them is as follows:

Code 1396 and an "X", entered on the SRS, will specify no evidence of corrosion or physical damage.

Code 1398 and an "X", entered on the SRS, will specify the device shall remain within specified tolerance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1394 and an "X", entered on the SRS, will specify there shall be no evidence of flashover, arcing, or insulation breakdown when the dielectric withstanding voltage test at sea level is performed.

Code 1432 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms when measured at high humidity.

Code 1406 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms when measured after drying.

Code 1429 and a value, entered on the SRS, will specify the maximum leakage current in milliamperes when dielectric withstanding voltage test at sea level is performed at high humidity.

Code 1404 and a value, entered on the SRS, will specify the maximum leakage current in milliamps when dielectric withstanding voltage test at sea level is performed after drying.

5.29 Peel Strength

Code 1720 is the 1006 test code (5.4).

Code 1722 is the 1006 except test code (5.4).

Code 1724 and an "X", entered on the SRS, will specify to test in accordance with MIL-P-50884.

Code 1730 is the 1006 requirement code (5.4).

Code 1732 is the 1006 except requirement code (5.4).

Code 1734 and a value, entered on the SRS, will specify the minimum peel strength in pounds per inch of effective conductor width at point contact.

Code 1736 and a value, entered on the SRS, will specify the minimum peel strength in newtons per metre of effective conductor width at point contact.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.30 Solderability

Code 4661 is the 1006 test code (5.4).

Code 4662 is the 1006 except test code (5.4).

Code 1754 and an "X", entered on the SRS, will specify to test in accordance with MIL-P-50884.

Code 4673 is the 1006 requirement code (5.4).

Code 4674 is the 1006 except requirement code (5.4).

To detail requirements for the solderability test, Code 4765 is mandatory. Information concerning these codes is as follows:

Code 4765 and an "X", entered on the SRS, will specify there shall be no evidence of physical damage.

Code 1764 and a value, entered on the SRS, will specify the minimum free solder wetting in percent required for the conductor area which is not covered by insulating material or adhesive.

Code 1766 and an "X", entered on the SRS, will specify there shall be no distortion or delamination of the flexible printed wiring after the test.

5.31 Stiffener Bond Strength

Code 1770 is the 1006 test code (5.4).

Code 1772 is the 1006 except test code (5.4).

Code 1774 and an "X", entered on the SRS, will specify to test in accordance with MIL-P-50884.

If exception to the test speed in MIL-P-50884 is desired, four codes are available to specify speed and tolerance requirements in inches or millimetres, respectively. Information concerning them is as follows:

Code 1775 or Code 1777, or both and a value(s), entered on the SRS, will specify the flexible circuit speed in inches per minute or in millimetres per minute when pulled from the hard board stiffener.

Code 1776 or Code 1778, or both and a value(s), will specify the flexible circuit speed tolerance in plus or minus inches per minute or millimetres per minute, respectively.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1780 is the 1006 requirement code (5.4).

Code 1782 is the 1006 except requirement code (5.4).

Code 1784 and a value, entered on the SRS, will specify the minimum bond strength in pounds per inch width of pull.

Code 1786 and a value, entered on the SRS, will specify the minimum bond strength in newtons per metre width of pull.

5.32 Terminal Area Bond Strength

Code 1800 is the 1006 test code (5.4).

Code 1802 is the 1006 except test code (5.4).

Code 1804 and an "X", entered on the SRS, will specify to test in accordance with MIL-P-50884.

Code 1810 is the 1006 requirement code (5.4).

Code 1812 is the 1006 except requirement code (5.4).

To detail requirements, it is mandatory to use Code 1814. Other codes are optional. These codes and information concerning them are as follows:

Code 1814 and an "X", entered on the SRS, will specify there shall be no evidence of conductor cracking, delamination or dewetting.

Code 1816 and an "X", entered on the SRS, will specify there shall be no loosening of a plated hole.

Code 1817 and an "X", entered on the SRS, will specify there shall be no loosening of conductor or terminal area around an unsupported hole.

Code 1818 and a value, entered on the SRS, will specify the minimum bond strength in pounds.

Code 1820 and a value, entered on the SRS, will specify the minimum bond strength in newtons.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1822 and a value, entered on the SRS, will specify the minimum bond strength in pounds per square inch.

Code 1824 and a value, entered on the SRS, will specify the minimum bond strength in newtons per square metre.

5.33 Thermal Shock

Code 4712 is the 1006 test code (5.4).

Code 4713 is the 1006 except test code (5.4).

To detail a thermal shock test, it is mandatory to use Codes 4714 and 4715.

Code 4714 and an "X", entered on the SRS, will specify to test in accordance with Method 107 of MIL-STD-202.

Code 4715 and a letter, entered on the SRS, will specify the applicable test condition letter.

Code 4719 and a document designation, entered on the SRS, will specify mounting shall be in accordance with the document (5.7).

Code 4720 is the 1006 requirement code (5.4).

Code 4722 is the 1006 except requirement code (5.4).

Code 4723 and an "X", entered on the SRS, will specify no evidence of physical damage. This code is mandatory when requirements are to be detailed after the thermal shock test.

Code 4726 and an "X", entered on the SRS, will specify the device shall remain within specified tolerance.

Code 1830 and a value, entered on the SRS, will specify the maximum resistance change in percent allowed between the initial resistance measurement and the resistance measurements after the thermal shock test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.34 Thickness of Solder or Platings

Code 1840 is the 1006 test code (5.4).

Code 1842 is the 1006 except test code (5.4).

Code 1844 and an "X", entered on the SRS, will specify to test in accordance with MIL-P-50884.

Code 1850 is the 1006 requirement code (5.4).

Code 1852 is the 1006 except requirement code (5.4).

Code 1854 or Code 1856, or both and a value(s), entered on the SRS, will specify the minimum plating thickness of plated through holes in inches or millimetres, respectively.

Code 1858 or Code 1860, or both and a value(s), entered on the SRS, will specify the minimum solder thickness of plated through holes in inches or millimetres, respectively.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
1.3	Enter on the SRS requirements from MIL-STD-35	
5.9	*Conductor Width	
	Minimum conductor width	
	(in.)	1570
	(mm)	1572
5.10	Design and Construction	
5.10.1	Classification (per 1006 document)	
	Type (letter)	1573
	Class (no.)	1574
5.10.2	Conductor Spacing	
	(Select as appropriate)	
	Minimum center-to-center conductor spacing	
	(in.)	1576
	(mm)	1577
	Nominal center-to-center conductor spacing	
	(in.)	1579
	(mm)	1580

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.10.2 (Cont)	Nominal center-to-center conductor spacing (Cont)	
	Tolerance	
	± (in.)	1582
	± (mm)	1583
	Minimum spacing from conductor to edge of flexible printed wiring	
	(in.)	1585
	(mm)	1586
5.10.3	Conductor Thickness	
	Nominal conductor thickness	
	(in.)	1588
	(mm)	1589
	Tolerance	
	± (in.)	1592
	± (mm)	1593

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.10.4	Conductor Weight	
	(oz/ft^2)	1598
	(kg/m^2)	1599
5.10.5	Extruded Adhesive Requirement	
	Minimum acceptable distance from plated through holes	
	(in.)	1602
	(mm)	1604
	Minimum acceptable distance from unsupported holes	
	(in.)	1606
	(mm)	1608
5.10.6	Laminate Thickness	
	Minimum base dielectric thickness	
	(in.)	1610
	(mm)	1611
	Minimum coverlayer thickness	
	(in.)	1613
	(mm)	1614

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.10.7	Registration	
	Between circuit layers	
	(Within TIR)	1616
	Between circuit layers and coverlayer/ stiffener boards center of plated hole to center of clearance hole	
	(in.)	1618
	(mm)	1619
5.10.8	Shielding	
	Shielding shall be required.	1620
	Nominal shielding thickness	
	(in.)	1622
	(mm)	1624
	Shielding weight	
	(oz/ft^2)	1626
	(kg/m^2)	1628

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.10.9	Trimmed Edges	
	Maximum inside corner radius	
	(in.)	1630
	(mm)	1632
	Maximum outside corner radius	
	(in.)	1634
	(mm)	1636
5.11	Coverlayer to Circuit Bond (Delamination Criteria)	
	At random locations	
	Maximum size of delaminations	
	(in^2)	1638
	(m^2)	1639
	Minimum acceptable distance from access hole edge	
	(in.)	1641
	(mm)	1642

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.11 (Cont)	At random locations (Cont)	
	Minimum acceptable distance from part edge	
	(in.)	1643
	(mm)	1644
	Along conductor edges	
	Maximum delamination width	
	(in.)	1646
	(mm)	1647
	Minimum acceptable distance from a conductor to a delamination along another conductor	
	(in.)	1648
	(mm)	1649
5.12	Termination Requirements	
5.12.1	Bared Conductor Areas	
	Coverlayer to overlap conductor pad (deg)	1897
	Minimum circumferential lip of coverlayer required over conductor pad	
	(in.)	1898
	(mm)	1899

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.12.1 (Cont)	Bared Conductor Areas (Cont)	
	Minimum diameter of coverlayer access hole	
	(in.)	1900
	(mm)	1901
5.12.2	Eyelets	
	Eyelet designation	
	Part number (no.)	1902
	Manufacturer (FSCM no.)	1903
	Specification (no.)	1904
	Terminal pad diameter not less than diameter of eyelet flange.	1906
	Outer diameter of eyelet flange concentric with outer diameter of pad.	
	(Within TIR)	1908
5.12.3	Pins	
	Pin designation	
	Part number (no.)	1909
	Manufacturer (FSCM no.)	1910
	Specification (no.)	1911

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.12.3 (Cont)	Pins (Cont)	
	Stake and solder pins to flexible printed wiring.	1912
	Welded-in pins provided during manufacture of flexible printed wiring.	1914
5.12.4	Solder Coating	
	Exposed conductor patterns	
	*Minimum coating thickness	
	(in.)	1916
	(mm)	1918
	*Maximum coating thickness	
	(in.)	1920
	(mm)	1922
	Terminal holes	
	*Minimum coating thickness	
	(in.)	1924
	(mm)	1926

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.12.4 (Cont)	Terminal holes (Cont)	
	*Maximum coating thickness	
	(in.)	1928
	(mm)	1930
	Pads solder coated for reflow connections.	1932
	Exposed solder fingers provided for reflow connections.	1933
5.12.5	Terminal Holes	
	Minimum annular ring - nonplated through holes	
	(in.)	1935
	(mm)	1937
	Minimum annular ring - plated through holes	
	(in.)	1939
	(mm)	1940

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.13	Marking	
	Identification of Flexible Printed Wiring	1950
	Mark per MIL-STD-130.	1952
	Mark per document from 5.7 (doc des)	
	Data to be marked on item (Select as required)	1953
	Part number.	1955
	Serial number.	1957
	Revision level.	1959
	Trade mark.	
	Height of characters	1961
	(in.)	1963
	(mm)	
5.14	Test Pattern	
	Furnish attached test pattern with flexible printed wiring.	1965
	Furnish test pattern per IPC-FC-240.	1967
	Number of test patterns per lot (quantity)	1969

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.15	Altitude Range	
	Operating condition	
	Sea level to	
	(ft)	5060
	(m)	5061
	Nonoperating condition	
	Sea level to	
	(ft)	5062
	(m)	5063
5.16	Temperature Ratings	
	Operating	
	Minimum (deg C)	5068
	Maximum (deg C)	5069
	Nonoperating	
	Minimum (deg C)	5070
	Maximum (deg C)	5071

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.17	Conductor Edge Overhang	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	1650
	Per 1006 document except (see 5.4) ____	1652
	Per MIL-P-50884.	1654
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1660
	Per 1006 document except (see 5.4) ____	1662
	As follows: (select one)	
	No overhang on conductor edges.	1663
	Maximum permissible overhang shall not exceed the base metal thickness.	1664
5.18	Continuity	
	*Test Methods (Select one)	
	Per 1006 docuemnt (see 5.4).	1670
	Per 1006 document except (see 5.4) ____	1672

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.18 (Cont)	*Test Methods (Cont)	
	Per MIL-P-50884.	1674
	Step (d) low temperature (deg C)	1675
	*Tolerance ± (deg C)	1676
	Step (e) high temperature (deg C)	1677
	*Tolerance ± (deg C)	1678
	Circuit resistance of each circuit shall be measured in accordance with Table I.	Table I
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1680
	Per 1006 document except (see 5.4) ____	1682
	As follows:	
	Maximum resistance (ohm)	1684
5.19	Dielectric Withstanding Voltage at Reduced Barometric Pressure	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	4883
	Per 1006 document except (see 5.4) ____	4884

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.19 (Cont)	*Test Methods (Cont)	
	Per MIL-STD-202, Method 301.	6300
	*Altitude per Method 105 of MIL-STD-202	
	Test condition (letter)	4886
	*Test voltage (Select one)	
	(Vdc)	4885
	(Vac)	4849
	Point of voltage application	
	Between adjacent conductors.	1690
	Between each circuit with respect to each other circuit.	1692
	Special preparation per document from 5.7 (doc des)	4859
	Duration of voltage application, if other than 60 seconds (s)	4891
	Mounting shall be per document from 5.7 (doc des)	6280
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	4907
	Per 1006 document except (see 5.4) ____	4908

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.19 (Cont)	*Requirements (Cont)	
	As follows:	
	*No evidence of flashover, mechanical damage, arcing, or insulation breakdown.	4906
	Maximum leakage (mA)	4894
	Remain within specified tolerance.	4901
5.20	Dielectric Withstanding Voltage at Sea Level	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	4860
	Per 1006 document except (see 5.4) ____	4861
	Per MIL-STD-202, Method 301.	4862
	*Test voltage (Select one)	
	(Vdc)	4854
	(Vac)	4855
	Points of voltage application	
	Between adjacent conductors.	1696
	Between each circuit with respect to each other circuit.	1698

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.20 (Cont)	Per MIL-STD-202, Method 301. (Cont)	
	Special preparation per document from 5.7 (doc des)	4850
	Duration of voltage application, if other than 60 seconds (s)	4867
	Mounting per document from 5.7 (doc des)	5000
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	4873
	Per 1006 document except (see 5.4) ____	4874
	As follows:	
	*No evidence of flashover, mechanical damage, arcing, or insulation breakdown.	4856
	Maximum leakage (mA)	4875
	Remain within specified tolerance.	4847
5.21	Flammability	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	2000
	Per 1006 document except (see 5.4) ____	2002
	Per MIL-C-55543.	2004

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.21 (Cont)	Flammability (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	2010
	Per 1006 document except (see 5.4) ____	2012
	As follows:	
	Maximum flame rate of travel	
	(in./min)	2014
	(mm/min)	2016
	Self-extinguishing within (s)	2018
5.22	Flexure Endurance	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	2020
	Per 1006 document except (see 5.4) ____	2022
	Per MIL-C-55543.	2024
	Per IPC-FC-240.	2025
	Low test temperature (deg C)	2026
	High test temperature (deg C)	2028

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.22 (Cont)	Flexure Endurance (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	2030
	Per 1006 document except (see 5.4) ____	2032
	As follows:	
	Minimum average number of bends (no.)	2034
	Maximum discontinuity (microseconds)	2036
	Maximum noise magnitude (mv rms)	2038
5.23	Folding	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	2040
	Per 1006 document except (see 5.4) ____	2042
	Per MIL-C-55543.	2044
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	2050
	Per 1006 document except (see 5.4) ____	2052

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.23 (Cont)	*Requirements (Cont)	
	As follows:	
	No evidence of cracking, delamination, or conductor failure.	2054
	No evidence of flashover or insulation breakdown when DWV test is performed.	2056
5.24	Fungus	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	4753
	Per 1006 document except (see 5.4) ____	4754
	MIL-STD-810, Method 508.	4755
	Test period, if other than 28 (days)	4756
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	4759
	Per 1006 document except (see 5.4) ____	4760
	Fungus resistant by certification or by test.	4761
	No evidence of fungus growth when tested.	4762

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.25	Insulation Flaws	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	2060
	Per 1006 document except (see 5.4) ____	2062
	Per MIL-C-55543.	2064
	*Test voltage (Vrms)	2065
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	2070
	Per 1006 document except (see 5.4) ____	2072
	As follows:	
	*No insulation flaws allowed.	2074
5.26	Insulation Resistance	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	1370
	Per 1006 document except (see 5.4) ____	1371

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.26 (Cont)	*Test Methods (Cont)	
	Per MIL-STD-202, Method 302.	1511
	*Condition (Select one)	
	Test condition (letter)	1378
	Test voltage (Vdc)	1373
	Electrification time, if other than 2 minutes (s)	1376
	Maximum measurement error at required value if other than 10 percent (pct)	1377
	Measure between adjacent conductors.	1700
	Measure between each circuit with respect to each other circuit.	1702
	Measure between circuit paths described in Table II.	Table II
	First test temperature (deg C)	1372
	Second test temperature (deg C)	1381
	Temperature tolerance (deg C)	1383

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.26 (Cont)	Insulation Resistance (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1379
	Per 1006 document except (see 5.4) ____	1380
	As follows:	
	*No evidence of physical damage.	1407
	Minimum insulation resistance (select one)	
	Single test	
	(megohms)	1386
	Multiple test	
	First test (megohms)	1384
	Second test (megohms)	1387
	Remain within specified tolerance.	1388
5.27	Low Pressure (Temperature)	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	2080
	Per 1006 document except (see 5.4) ____	2082
	Per MIL-C-55543.	2084
	*Test temperature (deg C)	2085

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.27 (Cont)	Low Pressure (Temperature) (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	2090
	Per 1006 document except (see 5.4) ____	2092
	As follows:	
	*No evidence of voids or delamination.	2093
	Maximum shrinkage	
	(in.)	2095
	(mm)	2096
	Minimum insulation resistance (megohms)	2098
	No evidence of flashover or insulation breakdown when DWV test is performed.	2099
5.28	Moisture Resistance	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	1390
	Per 1006 document except (see 5.4) ____	1391

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.28 (Cont)	*Test Methods (Cont)	
	Per MIL-STD-202, Method 106.	1397
	Step 7a not applicable.	4985
	Step 7b not applicable.	4986
	Mount per document from 5.7 (doc des)	1449
	Perform dielectric withstanding voltage test at high humidity.	4983
	Perform dielectric withstanding voltage test after drying.	4984
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1399
	Per 1006 document except (see 5.4) ____	1400
	As follows:	
	*No evidence of corrosion or physical damage.	1396
	Remain within specified tolerance.	1398
	No evidence of arcing, flashover, or insulation breakdown when DWV applied.	1394

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.28 (Cont)	As follows: (Cont)	
	Minimum insulation resistance at high humidity (megohms)	1432
	Minimum insulation resistance after drying (megohms)	1406
	Maximum leakage at high humidity (mA)	1429
	Maximum leakage after drying (mA)	1404
5.29	Peel Strength	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	1720
	Per 1006 document except (see 5.4) ____	1722
	Per MIL-P-50884.	1724
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1730
	Per 1006 document except (see 5.4) ____	1732

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.29 (Cont)	*Requirements (Cont)	
	As follows:	
	Minimum peel strength	
	(lbs per in.)	1734
	(N per m)	1736
5.30	Solderability	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	4661
	Per 1006 document except (see 5.4) ____	4662
	Per MIL-P-50884.	1754
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	4673
	Per 1006 document except (see 5.4) ____	4674
	As follows:	
	*No evidence of physical damage.	4675
	Minimum free solder wetting of conductor area not covered by insulating material or adhesive (pct)	1764
	No distortion or delamination of the flexible printed wiring after the test.	1766

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.31	Stiffener Bond Strength	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	1770
	Per 1006 document except (see 5.4) ____	1772
	Per MIL-P-50884.	1774
	Flexible circuit speed when pulled from hard board stiffener	
	(in. per minute)	1775
	± (in. per minute)	1776
	(mm per minute)	1777
	± (mm per minute)	1778
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1780
	Per 1006 document except (see 5.4) ____	1782
	As follows:	
	Minimum bond strength	
	(lbs per in. width of pull)	1784
	(N per m width of pull)	1786

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.32	Terminal Area Bond Strength	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	1800
	Per 1006 document except (see 5.4) ____	1802
	Per MIL-P-50884.	1804
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1810
	Per 1006 document except (see 5.4) ____	1812
	As follows:	
	*No evidence of conductor cracking, delamination or dewetting.	1814
	No loosening of a plated hole.	1816
	No loosening of conductor or terminal area around an unsupported hole.	1817
	Minimum bond strength	
	(lbs)	1818
	(N)	1820

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.32 (Cont)	Minimum bond strength (Cont)	
	($lb/in.^2$)	1822
	(N/m^2)	1824
5.33	Thermal Shock	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	4712
	Per 1006 document except (see 5.4) ____	4713
	Per MIL-STD-202, Method 107.	4714
	*Test condition (letter)	4715
	Mounting per document from 5.7 (doc des)	4719
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	4720
	Per 1006 document except (see 5.4) ____	4722
	As follows:	
	*No evidence of physical damage.	4723
	Remain within specified tolerance.	4726
	Maximum resistance change from initial resistance measurements (pct)	1830

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.34	Thickness of Solder or Platings	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	1840
	Per 1006 document except (see 5.4) ____	1842
	Per MIL-P-50884.	1844
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1850
	Per 1006 document except (see 5.4) ____	1852
	As follows:	
	Minimum plating thickness of plated through holes	
	(in.)	1854
	(mm)	1856
	Minimum solder thickness of plated through holes	
	(in.)	1858
	(mm)	1860

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 6

USE OF AEDPS

6.1 Procedure

The step by step procedure contained in MIL-STD-35 is applicable to Flexible Printed Wiring.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.


SECTION 7

FIGURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

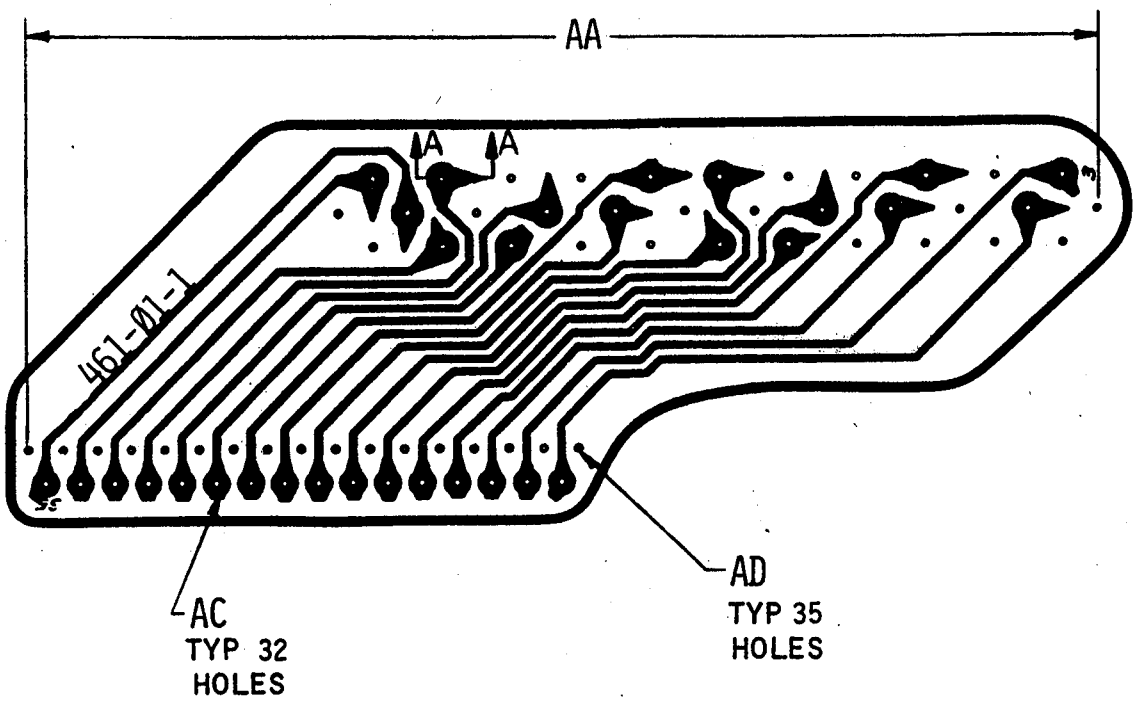

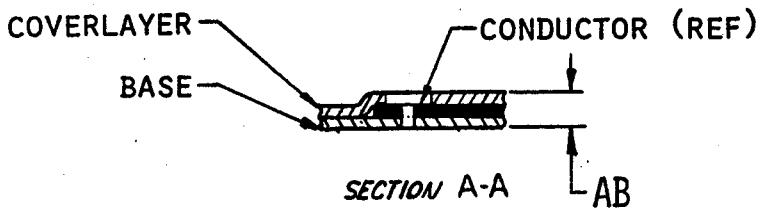


FIGURE 461-01-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 8

TABLES

Tables contained in MIL-STD-35 are applicable to Flexible Printed Wiring.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. CIRCUIT RESISTANCE MEASUREMENT
(See 5.18)

CIRCUIT RESISTANCE MEASUREMENT TABLE

CIRCUIT PATH	FROM HOLE NUMBER	TO HOLE NUMBER
2400	2401	2402
2403	2404	2405
2406	2407	2408
2409	2410	2411
2412	2413	2414
2415	2416	2417
2418	2419	2420
2421	2422	2423
2424	2425	2426
2427	2428	2429
2430	2431	2432
2433	2434	2435
2436	2437	2438
2439	2440	2441
2442	2443	2444
2445	2446	2447
2448	2449	2450
2451	2452	2453
2454	2455	2456
2457	2458	2459
2460	2461	2462
2463	2464	2465
2466	2467	2468
2469	2470	2471
2472	2473	2474
*7	*9	*25

*Number of print characters per column (column width). Heading spans are shown by underlining.

Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective cells. Only those lines from which codes are used will print. The table will appear in Section 4 of the MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE II. INSULATION RESISTANCE MEASUREMENT
(See 5.26)

INSULATION RESISTANCE MEASUREMENT TABLE

CIRCUIT PATH	FROM HOLE NUMBER	TO HOLE NUMBER
2500	2501	2502
2503	2504	2505
2506	2507	2508
2509	2510	2511
2512	2513	2514
2515	2516	2517
2518	2519	2520
2521	2522	2523
2524	2525	2526
2527	2528	2529
2530	2531	2532
2533	2534	2535
2536	2537	2538
2539	2540	2541
2542	2543	2544
2545	2546	2547
2548	2549	2550
2551	2552	2553
2554	2555	2556
2557	2558	2559
2560	2561	2562
2563	2564	2565
2566	2567	2568
2569	2570	2571
2572	2573	2574
*7	*9	*25

*Number of print characters per column (column width). Heading spans are shown by underlining.

Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective cells. Only those lines from which codes are used will print. The table will appear in Section 4 of the MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET___ OF ___

TITLE CODE | REQUESTER NO.

1 2 3 4 5 6 7 8 9 10 11 12

THIS FORM IS USED TO INITIATE A REQUEST FOR AN AEDPS DOCUMENT (SEE PARAGRAPH TITLED SPECIFICATIONS REQUIREMENT SHEET, SECTION 5 OF MIL-STD-35).

MARK IF APERTURE CARDS REQUIRED ☐

MARK IF SEARCH ONLY ☐

REVISION TO AEDPS DOCUMENT NO.:

REQUESTER'S NAME _____

MAILING ADDRESS _____

_____

PHONE NO. A/C _____

PRINTED WIRING, FLEXIBLE CHARACTERISTIC NAME	CHAR CODE 13 14 15 16	CHARACTERISTIC VALUE 20 25 30 35 40 45 50 55 60 65 70 75 79 80 (LINE NO.)
*DATE	1 Ø Ø 3	
*FSCM/CODE IDENT OF REQUESTER	1 Ø Ø 4	
*PRIME CONTRACT NUMBER	1 Ø Ø 5	
*APPLICABLE GENERAL SPECIFICATION	1 Ø Ø 6	
*APPROVED ITEM NAME CODE	1 Ø Ø 7	
*ITEM APPLICATION	1 Ø Ø 8	
DRAWING FIGURE NUMBER(S)	1 Ø Ø 9	
DIMENSIONS - TABLE A	USE BLANK SRS LINES	
*APPLICABLE DOCUMENTS TABLE B		
*SOURCE - TABLE R OR S		
*SOURCE OR SPECIFICATION CONTROL - APPROPRIATE CODE(S)		
TEST METHOD - SELECT CODE 156Ø or 1561		
MATERIALS INSPECTION - APPROPRIATE CODE		
QUALIFICATION INSPECTION SELECT CODE 5298 or 5299		
FIRST ARTICLE INSPECTION APPROPRIATE CODE(S)	USE BLANK SRS LINES	
QUALITY CONFORMANCE INSPECTION APPROPRIATE CODE(S)		
CONDUCTOR WIDTH (SELECT CODE 1570 or 1572, OR BOTH)		

AS A FINAL CHECK, SCAN THE SRS FOR THE FOLLOWING COMMON ERRORS:

- ☐ APPLICABLE DOCUMENTS - TABLE B PROPERLY ENTERED
- ☐ CHARACTERISTIC CODE USED MORE THAN ONCE (OTHER THAN MULTILINE STATEMENT)
- ☐ MANDATORY CHARACTERISTIC CODES TABLE AND VALUES NOT SUPPLIED
- ☐ MULTILINE STATEMENT NOT NUMBERED IN COLUMN 80
- ☐ POUND SIGN (#) OMITTED FROM END OF STATEMENT (CHARACTERISTIC VALUE)
- ☐ USE OF POUND SIGN (#) WITHOUT ACCOMPANYING CHARACTERISTIC VALUE
- ☐ ZERO (Ø) WRITTEN WITHOUT VIRGULE (Ø)

Source: https://assist.dla.mil - Document dated: 2006-10-26T07:24Z
Check the source to verify that this is the current version before use.

* MANDATORY

Custodians:
Army-MI

Review Activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User Activity:
Army-MU

Preparing Activity:
Army-MI
(Project EDS-A119)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

☆U.S. GOVERNMENT PRINTING OFFICE: 1976— 603-766:3435

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.