MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

AMPLIFIERS

FSC-EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Automated Engineering
Document Preparation System,
Amplifiers

MIL-STD-35-103(MI)

1. This Military Standard is approved by the U.S. Army Materiel Development and Readiness Command, Department of the Army, and is approved for use by all its activities. All other military activities are required to employ this Standard where suitable.

2. Recommended corrections, additions or deletions should be addressed to Commander, U.S. Army Missile Command, ATTN: DRSMI-RCS, Redstone Arsenal, Alabama 35809.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of MIL-STD-35-103(MI) is to facilitate the preparation of Military Specification, Exceptions for Amplifiers.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the basic MIL-STD-35.

3. It is important that the procedure described in the basic document (MIL-STD-35C) and subsequent revisions be followed explicitly in order for the computer to produce a document suitable for competitive procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of MIL-STD-35C. This Information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS

SECTION	TITLE	INSTR PAGE
SECTION 1	INTRODUCTION	1
1.1	Scope	1
1.2	Purpose	1
1.3	Format	1
1.4	Military Specification, Exception Title Index	2
1.4.1	Title	2
1.4.2	Index	3
SECTION 2	APPLICABLE DOCUMENTS	5
SECTION 3	DEFINITIONS	9
SECTION 4	GENERAL DESCRIPTION OF AEDPS	11
SECTION 5	DETAILED DESCRIPTION OF AEDPS	13
5.1	Introduction	13
5.2	Specification Requirement Sheet (SRS)	13
5.3	Specification Requirements	13
5.3.1	Mandatory Specification Requirements	13
5.4	Code 1006 Requirements and Test Methods	14
5.5	Approved Item Name Code	15
5.6	Dimensions and Figures	16

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS (CONT)

SECTION	TITLE	INSTR PAGE	SRL PAGE
5.7	Applicable Documents	16	
5.8	Tabulation	21	
5.9	Gain	21	87
5.10	Power	24	88
5.11	Design Characteristics	30	89
5.11.1	Frequency	31	89
5.11.2	Supply Power	31	90
5.11.3	Phase Linearity	32	91
5.11.4	Reverse Isolation	32	91
5.11.5	Intercept Point	32	91
5.11.6	Schematic Number	32	91
5.11.7	Class Operation Letter	32	91
5.11.8	Connectors	32	91
5.11.9	Weight, Maximum	33	92
5.11.10	Number of Fins	33	92
5.11.11	Altitude Range	33	92
5.11.12	Temperature	34	93
5.11.13	Mounting Hardware	34	93

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS (CONT)

SECTION	TITLE	INSTR PAGE	SRL PAGE
5.12	Acceleration	34	93
5.13	Altitude (Low Pressure)	36	96
5.14	Bandwidth and Center Frequency	37	98
5.15	Dielectric Withstanding Voltage at Reduced Barometric Pressure	38	100
5.16	Dielectric Withstanding Voltage at Sea Level	39	101
5.17	Electromagnetic Interference	41	103
5.18	Endurance	42	104
5.19	Fidelity	43	106
5.20	Frequency Response	43	107
5.21	Fungus	49	108
5.22	High Temperature	49	109
5.23	Humidity	51	111
5.24	Immersion	52	113
5.25	Impedance	53	114
5.26	Insulation Resistance	55	115
5.27	Linearity	57	117
5.28	Low Temperature	59	118
5.29	Moisture Resistance	60	121

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS (CONT)

SECTION	TITLE	INSTR PAGE	SRL PAGE
5.30	Pulse Response	62	124
5.31	Salt Spray	68	126
5.32	Sand and Dust	69	127
5.33	Shock	70	129
5.34	Shock, High Impact	72	132
5.35	Spurious Outputs	73	133
5.36	Stability	79	137
5.37	Temperature Altitude	80	138
5.38	Thermal Shock	81	140
5.39	Vibration, High Frequency	82	142
5.40	Vibration, Low Frequency	83	144
5.41	Vibration, Random	84	146
SECTION 6	USE OF AEDPS	149	
6.1	Procedure	149	
SECTION 7	FIGURES	151	
SECTION 8	TABLES	157	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT
PREPARATION SYSTEM (AEDPS)

AMPLIFIERS

SECTION 1

INTRODUCTION

1.1 Scope

This dash-numbered part of the Automated Engineering Document Preparation System, MIL-STD-35, covers detailed requirements of Amplifiers.

1.2 Purpose

The purpose of this dash-numbered part of MIL-STD-35 is to provide a requester necessary information to properly prepare a request for an Amplifier Military Specification, Exception (MSE).

1.3 Format

The requester will find it impossible to complete an SRS using only this dash-numbered part of MIL-STD-35. Specification Requirements which are standard for all generic families have been included in the master document at the issuance of MIL-STD-35C. These specification requirements are not repeated in each dash-numbered part. The following list contains subjects from MIL-STD-35 which are pertinent to every dash-numbered part unless otherwise excepted.

General Description of AEDPS
Part Numbering
Specification Requirements Sheet
Writing Methodology
Mandatory Specification Requirements
General Specification Requirements
Dimensions and Drawings
Applicable Documents
Materials
Finishes

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Inspections
Single and Multi-item Specifications (Tabulation)
Sources
Search
General Instructions for SRL
Tables

1.4 Military Specification, Exception Title Index

1.4.1 Title

The title of a generated MSE must be selected from one of the titles listed in the Military Specification Exception Title Index (see 1.4.2). If a suitable title is not found in the Military Specification Exception Title Index, a request should be forwarded to USAMICOM, ATTN: DRSMI-RCS, along with the desired title, and the related document. A code will be assigned and the code, title, and related document will be made a part of the Military Specification Exception Title Index. The requester will be notified of the code assigned.

One of the six-digit characteristic value codes, listed in the MSE TITLE CODE column of the Military Specification Exception Title Index, entered on a Specification Requirements Sheet (SRS), will specify that the title of the MSE will be the title shown with that code in the index. Each MSE title listed in the index is compatible with the document(s) listed with that title in the RELATED DOCUMENT column. The list may or may not be a complete listing.

The information contained in the RELATED DOCUMENT COVERAGE column is intended for the requester's reference; when more than one document is listed for a title, this information will be found useful in determining which of the documents is most suitable for use as the applicable General Specification.

The MSE title uses the basic federal item name listed in Cataloging Handbook H6. Titles with additional modifying and identifying words are provided to assist a designer in defining the scope of the MSE. To allow the designer flexibility, the title is generally not as restrictive as the basic specification to which the exception is taken. The reverse AEDPS Title comprises the words that will appear in the Scope paragraph (1.1) of the MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

If the item selected from the AEDPS document becomes an item of supply, then the Cataloging Handbook H6 nomenclature must be used.

The MSE title may or may not be the same as the title used in DODISS, FIIG or the document to which the MSE document was written. Documents referenced in the MSE that will be listed in the Applicable Documents paragraph (2.1) of the MSE will be identified by the exact title that appears on the referenced document. The title written on the MSE or in DODISS or FIIG will not be entered in paragraph 2.1.

1.4.2 Index

The Military Specification Exception Title Index is as follows:

RELATED DOCUMENT	RELATED DOCUMENT COVERAGE	MSE TITLE	MSE TITLE CODE
MIL-A-13290	AM-20( )/TIQ-2	Amplifier, Audio Frequency	45400l
MIL-A-14819	Doppler - Frequency Signal		
MIL-A-16294	Loudspeaker (Shipboard)		
MIL-A-23088	AM-3198( )/URC		
MIL-A-23595	AM-3597C/A & AM-4326B/A		
MIL-A-25546	AM-944/AIC-13		
MIL-A-28716	AM-3729( )/SR		
MIL-A-45781	AM-1098/MSE-2		
MIL-A-46813	AM-1097 /MSE-2		
MIL-A-55129	AM-1780( )/VRC		
MIL-A-11976	TS-580( )/U	Amplifier, Direct Current	454002
MIL-A-45136	AM-l093/M		
MIL-A-6589	Single Channel, Type A-2	Amplifier, Electronic Control	454003
MIL-A-8026	Two Channel, Type MA-1		
MIL-A-25899	AM-1799/ARN-6		
MIL-A-45130	AM-l057/MS		
MIL-A-45606	AM-1056/M		
MIL-A-46804	AM-1102/MSA-7		
MIL-A-46841	Power Servo		
MIL-A-60146	Sight System XM58		
MIL-A-83162	Synchro Signal AM-6015/A		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

RELATED DOCUMENT	RELATED DOCUMENT COVERAGE	MSE TITLE	MSE TITLE CODE
MIL-A-45112	AM-l059/MS	Amplifier, Intermediate Frequency	454004
MIL-A-45652	AM-1062/MS		
MIL-A-46836	Pulse Acquisition Radar		
MIL-A-55218	AM-761( )/Tpx		
MIL-A-601OO	AM-1063/MS		
	AM-1064/MS		
MIL-A-24181	AM-1565/URC	Amplifier, Radio Frequency	454005
MIL-A-28988	AM-6545/GRC-193		
MIL-A-48316	M4E1	Amplifier, Trigger Pulse	454006
MIL-A-14878	10559445 Laser Receiver-Transmitter	Amplifier, Video	454007
MIL-A-4561O	AM-1076/M		
MIL-A-46330	AM-l075A/M		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 2

APPLICABLE DOCUMENTS

The following documents form a part of this Standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-A-6589	Amplifier, Electronic Control, Type A-2
MIL-A-8026	Amplifier, Electronic Control, Type MA-1
MIL-A-11976	Amplifier, Direct Current, TS-580/U
MIL-A-13290	Amplifier, Audio Frequency, AM-20/TIQ-2
MIL-A-14819	Amplifier, Audio Frequency, Doppler
MIL-A-14878	Amplifier, Video, 10559445, Laser Receiver-Transmitter
MIL-A-16294	Amplifier, Audio Frequency, Loudspeaker (Shipboard)
MIL-A-23088	Amplifier, Audio Frequency, AM-3198/URC
MIL-A-23595	Amplifier, Audio Frequency, AM-3597C/A and AM-4326B/A
MIL-A-24181	Amplifier, Radio Frequency, AM-1565/URC
MIL-A-25546	Amplifier, Audio Frequency, AM-944/ AIC-13
MIL-A-28716	Amplifier, Audio Frequency, AM-3729/SR

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS (Cont)

MILITARY

MIL-A-28988	AmpIifier, Radio Frequency, AM-6545/GRC-193
MIL-A-45112	Amplifier, Intermediate Frequency, AM-l059/MS
MIL-A-45130	Amplifier, Electronic Control, AM-1057/MS
MIL-A-45136	Amplifier, Direct Current, AM-1093/M
MIL-A-45606	Amplifier, Electronic Control, AM-1056/M
MIL-A-4561O	Amplifier, Video, AM-1076/M
MIL-A-45652	Amplifier, Intermediate Frequency, AM-1062/MS
MIL-A-45781	Amplifier, Audio Frequency, AM-1098/MSE-2
MIL-A-46330	Amplifier, Video, AM-1075A/M
MIL-A-46804	Amplifier, Electronic Control, AM-1102/MSA-7
MIL-A-46813	Amplifier, Audio Frequency, AM-1097/MSE-2
MIL-A-46836	Amplifier, Intermediate Frequency, Pulse Acquisition Radar
MIL-A-46841	Amplifier, Electronic Control, Power Servo
MIL-A-48316	Amplifier, Trigger Pulse, M4El

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS (Cont)

MILITARY

MIL-A-55129	Amplifier, Audio Frequency, AM-1780/VRC
MIL-A-55218	Amplifier, Intermediate Frequency, AM-761/TPX
MIL-A-60100	Amplifier, Intermediate Frequency, AM-1063/MS, AM-1064/MS
MIL-A-60146	Amplifier, Electronic Control, Sight System XM58
MIL-A-83162	Amplifier, Electronic Control, AM-6015/A
MIL-E-16400	Electronic Equipment, Naval Ship and Shore, General Specification

STANDARDS

MILITARY

MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-461	Electromagnetic Interference Characteristics Requirements for Equipment
MIL-STD-462	Electromagnetic Interference Characteristics, Measurement of
MIL-STD-810	Environmental Test Methods

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

OTHER PUBLICATIONS

ASTM E380	Metric Practice Guide

(Copies of Standards and Handbooks required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 3

DEFINITIONS

Definitions contained in MIL-STD-35 are applicable to Amplifiers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 4

GENERAL DESCRIPTION OF AEDPS

The general description of AEDPS contained in MIL-STD-35 is applicable to Amplifiers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 5

DETAILED DESCRIPTION OF AEDPS

5.1 Introduction

The detailed description of AEDPS applicable to Amplifiers consists of the following:

a. The detailed description of AEDPS specified in MIL-STD-35.

b. The additional detailed description contained in this section.

5.2 Specification Requirement Sheet (SRS)

Specification Requirement Sheet (SRS) requirements described in MIL-STD-35 and at the end of this dash-numbered part are applicable to Amplifiers.

5.3 Specification Requirements

All specification requirements described in MIL-STD-35 are applicable to Amplifiers.

Refer to ASTM E380 for guidance in using the International System of Units (SI).

5.3.1 Mandatory Specification Requirements

In addition to the mandatory specification requirements of MIL-STD-35, some of the specification requirements described herein are mandatory and shall be entered on the SRS of each request for a MSE. If one or more of these mandatory characteristics are omitted from a request, one or more important details will not be included in the MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.


Mandatory specification requirements consist of all those listed in MIL-STD-35 and the following:

CHARACTERISTICS	CHARACTERISTIC CODE
Gain, Applied Signal Voltage and Frequency (columns 3, 4, 6 and 7)	Table I
Gain, Response Signal Voltage or Decibels (Columns 9 and 10 or 13 or 14)	Table I
Power, Applied Signal Voltage and Frequency (Columns 4, 5, 7 and 8)	Table II
Power Response (Columns 11 and 12)	Table II
Frequency	1563, 1564, or 1565 and 1566, 1567, or 1568 or 1569, 1570, or 1571

5.4 Code 1006 Requirements and Test Methods

Many requirements and test methods are shown on the SRS as “Requirements per 1006 document” or “Test per 1006 document” with an adjacent code for each. The adjacent code, entered on the SRS, with an “X”, will cause the MSE to state that the requirement or test method be in accordance with the document to which exception is being taken.

Similarly, many requirements and test methods are shown on the SRS as “Requirements per 1006 document except” or “Test per 1006 document except” with an adjacent code for each. This adjacent code, entered on the SRS with the exact words desired to complete the statement shown, will specify a complete statement. Only the words required to complete the statement after the “except” are entered on the SRS (Example 1).

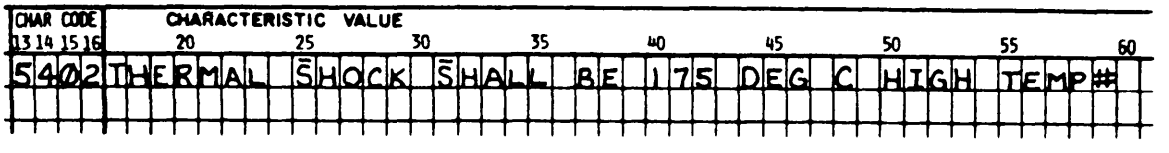

EXAMPLE 1

In Example 1, the code and entry will generate a paragraph as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

"GROUP A INSPECTION. GROUP A INSPECTION SHALL BE PERFORMED AS SPECIFIED IN THE SPECIFICATION REFERENCED IN 3.1 EXCEPT THERMAL SHOCK SHALL BE 175 DEG C HIGH TEMP."

The test method per 1006 code and requirements per 1006 code from the same test shall not be used together. This condition would indicate no exception is being specified. If a test method code(s) has been selected, it is mandatory that a requirement code be selected; and if a requirement code has been selected, it is mandatory that a test method code(s) be selected.

5.5 Approved Item Name Code

The approved item name code to be entered on the SRS with Code 1007 for an Amplifier is selected from the following list:

APPROVED ITEM NAME	ITEM NAME CODE
Audio Frequency Amplifier	00511
Direct Current Amplifier	19692
Electronic Control Amplifier	00096
Intermediate Frequency Amplifier	00885
Radio Frequency Amplifier	00446
Trigger Pulse Amplifier	00094
Video Amplifier	00095
Unapproved Name	77777

Only the Item Name Code number is entered on the SRS with Code 1007.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.6 Dimensions and Figures

All specification requirements for dimensions and figures described in MIL-STD-35 are applicable.

The figures applicable to Amplifiers are contained in Section 7. It is mandatory to enter, on the SRS, Code 1009 and a figure number.

5.7 Applicable Documents

The documents listed in the Applicable Document List of Section 5 of MIL-STD-35 and appropriate codes from Table B of MIL-STD-35 shall be entered on the SRS. In addition, the appropriate documents shown in the matrix below and the applicable codes from Table B of MIL-STD-35 shall be entered on the SRS when the codes in the TEST columns are used to specify design tests. Shown in the TEST columns are the names of the applicable tests. A document designation, with a code from Table B, is entered on the SRS only once.

DOCUMENT \ TEST	Bandwidth and Center Frequency - Code 1617	Fidelity - Code 1730	Frequency Response - Code 1743	Gain - Code 1757	Impedance - Code 1800	Linearity - Code 1807	Power - Code 1836	Pulse Response - Code 1851	Spurious Outputs - Code 1907	Stability - Code 1942
MIL-A-6589							X			
MIL-A-8026							X			
MIL-A-11976							X			X
MIL-A-13290			X	X			X		X	
MIL-A-14819			X				X		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DOCUMENT \ TEST	Bandwidth and Center Frequency - Code 1617	Fidelity - Code 1730	Frequency Response - Code 1743	Gain - Code 1757	Impedance - Code 1800	Linearity - Code 1807	Power - Code 1836	Pulse Response - Code 1851	Spurious Outputs - Code 1907	Stability - Code 1942
MIL-A-14878				X			X	X		
MIL-A-16294			X		X		X		X	X
MIL-A-23088			X		X		X		X	
MIL-A-23595			X	X	X	X	X		X	X
MIL-A-24181		X					X			
MIL-A-25546			X						X	
MIL-A-28716			X						X	
MIL-A-28988					X		X		X	
MIL-A-45112	X			X			X			
MIL-A-45130				X			X			X
MIL-A-45136				X			X			
MIL-A-45606				X			X		X	
MIL-A-45610								X		
MIL-A-45652	X			X			X			
MIL-A-45781							X			X
MIL-A-46330								X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DOCUMENT / TEST	Bandwidth and Center Frequency - Code 1617	Fidelity - Code 1730	Frequency Response - Code 1743	Gain - Code 1757	Impedance - Code 1800	Linearity - Code 1807	Power - Code 1836	Pulse Response - Code 1851	Spurious Outputs - Code 1907	Stability - Code 1942
MIL-A-46804				X			X		X	
MIL-A-46813				X			X			X
MIL-A-46836	X			X			X			
MIL-A-46841							X			
MIL-A-48316								X		
MIL-A-55129			X		X		X		X	
MIL-A-55218	X			X				X	X	
MIL-A-60100	X			X						
MIL-A-60146							X			
MIL-A-83162				X			X			

The documents listed in the Applicable Document List of Section 5 of MIL-STD-35 and appropriate codes from Table B of MIL-STD-35 shall be entered on the SRS. In addition, the appropriate documents shown in the DOCUMENTS column below and the applicable codes from Table B of MIL-STD-35

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

shall be entered on the SRS when the codes listed in the CODES column are used to specify tests. Shown parenthetically in the CODES column is a reference to the applicable test. A document designation, with a code from Table B, is entered on the SRS only once.

DOCUMENTS	CODES
MIL-A-8026	1600 (Acceleration)
MIL-E-16400	1968 (Thermal Shock)
MIL-STD-202	6251 (Acceleration) 6300 (DWV, Reduced Pressure) 4862 (DWV, Sea Level) 4853 (Humidity) 4810 (Immersion) 1511 (Insulation Resistance) 1397 (Moisture Resistance) 4771 (Salt Spray) 4960 (Sand and Dust) 1482 (Shock, High Impact) 4714 (Thermal Shock) 1447 (Vibration, High Frequency) 1467 (Vibration, Low Frequency) 1427 (Vibration, Random)
MIL-STD-81O	1607 (Altitude) 4755 (Fungus) 6218 (High Temperature) 6232 (Low Temperature) 7312 (Shock) 1958 (Temperature Altitude)
MIL-STD-462	1865, 1866, 1867, 1868, 1869 (Electromagnetic Interference)
MIL-STD-461	1864 (Electromagnetic Interference)
Document to which exception is taken	1006

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

In addition, when the codes listed below are used to specify mounting or special preparations in accordance with a document, the document designation with an appropriate code from Table B of MIL-STD-35 must be entered on the SRS.

6265 Acceleration, mounting
4859 DWV at reduced pressure, special preparation
6280 DWV at reduced pressure, mounting
4850 DWV at sea level, special preparation
5000 DWV at sea level, mounting
1520 Insulation resistance, special preparation
1449 Moisture resistance, mounting
4773 Salt spray, mounting
1468 Shock, high impact, mounting
4684 Shock, specified pulse, mounting
4719 Thermal shock, mounting
4707 Vibration, high frequency, mounting
4729 Vibration, low frequency, mounting
4975 Vibration, random, mounting

For these codes any document from the Index, 1.4.2, may be used to specify which test in the document contains applicable mounting or preparation requirements, enter on the SRS the test name and the document designation (Example 2).

CHAR CODE 13 14 15 16	CHARACTERISTIC VALUE 20 25 30 35 40 45 50
6265	ACCELERATION, MIL-A-8026#

EXAMPLE 2

Code 6265 in Example 2 specifies that the mounting in the Acceleration, test which is not in MIL-A-6589, shall be in accordance with the mounting in the Acceleration test in MIL-A-8026.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.8 Tabulation

All specification requirements from tabulation described in MIL-STD-35 are applicable.

In addition to dimensions from Table A, characteristics in this dash-numbered part that are candidates for tabulation are contained in the following list. Only characteristic codes from Table A and this list shall be entered on the SRS with codes from the Specification Requirement Sheet Tabulation Table of MIL-STD-35.

When different units of measure are shown for a specified parameter, only one may be tabulated. For example, where there, are several codes which may be used to specify weight, each of which specifies a different unit of measure, only one code may be tabulated. However, equivalent U.S. or SI units of measure may be used for a specified parameter.

TABULATION CANDIDATES FOR AMPLIFIERS

TOP LINE	SECOND LINE	BOTTOM LINE	CODE
BANDWIDTH	LWR LIMIT	(MEGAHZ)	1626
BANDWIDTH	UPR LIMIT	(MEGAHZ)	1627
FREQUENCY	LWR LIMIT	(HZ)	1563
FREQUENCY	UPR LIMIT	(HZ)	1566
FREQUENCY	LWR LIMIT	(KHz)	1564
FREQUENCY	UPR LIMIT	(KHz)	1567
FREQUENCY	LWR LIMIT	(MEGAHZ)	1565
FREQUENCY	UPR LIMIT	(MEGAHZ)	1568
WEIGHT	MAXIMUM	(OUNCE)	1586
WEIGHT	MAXIMUM	(POUND)	1587
WEIGHT	MAXIMUM	(GRAM)	1588
WEIGHT	MAXIMUM	(KILOGRAM)	1589

5.9 Gain

Code 1757 and a document designation, entered on the SRS, will specify that testing shall be performed in accordance with the document (5.7).

The codes in Table I, Gain, located in Section 8 are used to specify the output Gain in voltage, or power with certain input voltages and discrete frequencies. Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective table cell(s). Only those lines from which codes are used will print. The table will appear in Section 3 of the MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Codes in the second column entitled CONDITION are used to specify the conditions such as standard, service, low voltage as examples.

Codes in the third, fourth, and fifth columns are used to specify the applied voltages to the amplifier including polarity, units of measure, and percent tolerance.

Codes in columns 6, 7, and 8 are used to specify the applied discrete test frequency or frequencies including units of measure and the tolerance limits.

Codes in columns 3, 4, 6, and 7 are mandatory for the Gain test.

Codes in columns 9, 10, 11, and 12 are used to specify the output voltages, including polarity, units of measure, percent tolerance, and whether minimum or maximum.

Codes in column 15 entitled STAB TIME (Stabilization Time) are used to specify the time in milliseconds for the gain to be attained within one decibel of the specified value after the application of dc input power.

Codes in columns 13 and 14 are used to specify the minimum and maximum power gain in plus or minus decibels. A minimum gain is usually specified. However, a range between minimum and maximum gain may be specified.

Codes in columns 9 and 10, or 13 or 14 are mandatory for the Gain test.

Codes 1758 or 1759, located on the SRL, and an “X”, entered on the SRS, will specify that the test for gain shall be either broad or narrow bandwidth operation, respectively.

Codes 1760 and 1761 and values, entered on the SRS, will specify the low temperature (service conditions) range in minus degrees Celsius when the output is down maximum decibels from the gain under standard conditions. Enter dash (-) for minus temperature on the SRS ahead of the value, i.e., -55.

Code 1762 and a value, entered on the SRS, will specify the maximum difference in voltage gain of two channels in percentage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1763 and a value, entered on the SRS, will specify the voltage gain output under service conditions in maximum decibels down from the voltage gain output under standard conditions when operated at low temperature.

Code 1764 and a value, entered on the SRS, will specify the gain flatness by maximum variation in plus or minus decibels.

The codes from Table I and values entered on the SRS in Example 3 specify the following:

Code 2700 specifies that the test for Gain shall be under Standard conditions.

Codes 2701 and 2702 specify that the applied voltage to the amplifier shall be plus 27.5 volts dc.

Codes 2704 and 2705 specify that the test frequency shall be 1000 hertz.

Codes 2739 and 2740 specify that the voltage gain shall be between minimum of plus 60 db and maximum of plus 62 db.

Code 2741 specifies the gain stabilization time as 100 milliseconds.

CHAR CODE 13 14 15 16	CHARACTERISTIC VALUE 20 25 30 35 40 45 50
2700	STANDARD#
2701	+27.5#
2702	VOLTS DC#
2704	1000#
2705	HERTZ#
2739	+60#
2740	+62#
2741	100#

EXAMPLE 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The codes from Table I and values entered on the SRS in Example 4 specify the following:

Codes 2701 and 2702 specify that the applied voltage to the amplifier shall be 13 millivolts ac.

Codes 2704 and 2705 specify that the input frequency shall be 15 megahertz.

Codes 2735, 2736, and 2738 specify that the output gain shall be a minimum of plus 5.0 volts dc.

CHAR CODE 13 14 15 16	CHARACTERISTIC VALUE 20 25 30 35 40 45 50
2701	13#
2702	MILLIVOLTS AC#
2704	15#
2705	MEGAHERTZ#
2735	+5#
2736	VOLTS DC#
2738	MIN#

EXAMPLE 4

5.10 Power

Code 1836 and a document designation, entered on the SRS, specifies that testing shall be in accordance with the document (5.7).

The codes in Table II, Power, located in Section 8, are used to specify applied voltages, frequencies, load impedances, output power and voltages. Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective cell(s). Only those lines from which codes are used will print. The table will appear in Section 3 of the MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Codes in columns 2 and 3 are used to specify the input and output circuit or channel terminals (e.g., “A, B“ for input; “F, G“ for output).

Codes in columns 4, 5, and 6 are used to specify signal voltage values, including polarity, units of measure, and percent tolerance.

Codes in columns 7, 8, and 9 are used to specify the value of discrete test frequencies, units of measure, and tolerance in plus or minus hertz.

Codes in columns 4, 5, 7, and 8 are mandatory for this test.

Codes in column 10 are used to specify the test load impedance in ohms.

Codes in columns 11 and 12 are used to specify power output value and units of measure in milliwatts, watts, or kilowatts. The use of these codes is mandatory for this requirement.

Codes in columns 13 through 17 are used to specify the response or output voltage, including polarity, units of measure, minimum or maximum levels, and voltage unbalance. The unbalance is between output voltage for in-phase and out-of-phase input signal voltages of the same magnitude.

Code 1837 on the SRL and a value, entered on the SRS, will specify the maximum over-drive peak envelope power level in watts.

Code 1838 and an “X”, entered on the SRS, will specify that there shall be no damage to the circuits in the amplifier from over-drive.

Codes 1839, 1840, or 1841 and a value, entered on the SRS, will specify the maximum power output level into a load of 50 ohms as watts, volts rms, or decibels (milliwatt reference), respectively.

Code 1842 and an “X”, entered on the SRS, will specify that there shall be no damage by overvoltage due to short circuit of the power source resistances.

Code 1843 and an “X”, entered on the SRS, will specify that there shall be satisfactory operation of the amplifier with input voltages shown in Table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1844 and an “X”, entered on the SRS, will specify that there shall be satisfactory operation of the amplifier with input frequencies shown in Table II.

Code 1577 and a value, entered on the SRS, will specify the minimum power output at one decibel gain compression in decibels (milliwatt reference).

Code 1578 and a value, entered on the SRS, will specify the minimum power output harmonic level in minus decibels.

Code 1579 and a value, entered on the SRS, will specify minimum second and third order intermodulation in decibels.

The codes from Table II and values entered on the SRS in Example 5 specify the following:

Code 2990 specifies that the test voltage shall be applied at terminal Pl-l.

Code 2991 specifies that the output power shall be measured at terminal Pl-4.

Codes 2992 and 2993 specify that the applied voltage shall be 0.22 volts rms.

Codes 2995 and 2996 specify that the applied voltage frequency shall be 1000 hertz.

Code 2998 specifies that the test load impedance shall be 100 ohms.


Codes 3080 and 3081 specify that the output power shall be one watt.

Codes 3001, 3002, 3004, and 3005 specify that the applied voltage shall be increased to 7.35 volts rms at 1000 hertz.

Code 3007 specifies that the load impedance shall be 600 ohms.

Codes 3088 and 3089 specify that the output power shall be 200 milli-watts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

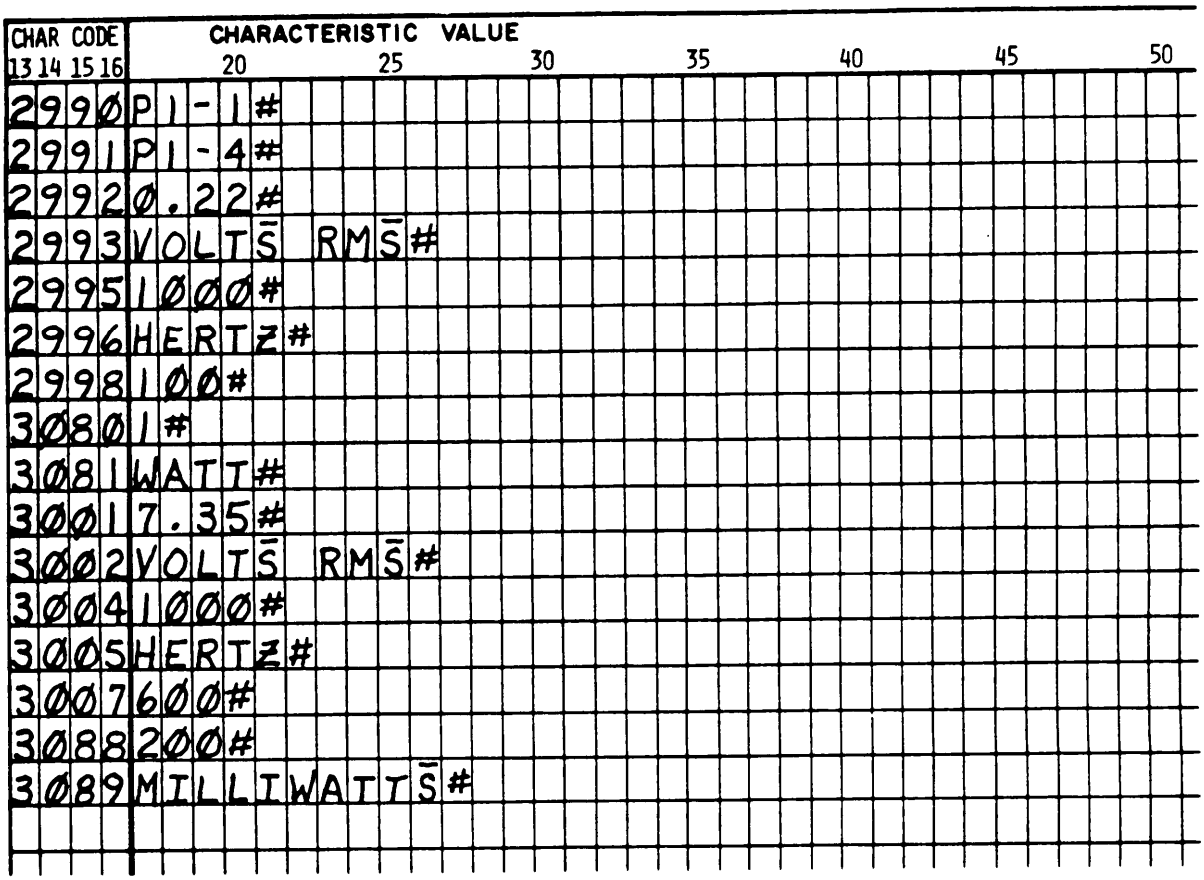

EXAMPLE 5

The codes and values entered on the SRS in Example 6 specify the following:

Code 2990 specifies the input voltage pin connection Pl-3.

Code 2991 specifies the output voltage pin connection Pl-9.

Codes 2992, and 2993 specify that the applied voltage shall be plus 0.4 volts dc.

Codes 3082, 3083, and 3086 specify that the minimum output voltage shall be plus 20 volts dc.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Codes 3090, 3091, and 3094 specify that the maximum output voltage shall be plus 40 volts dc.

Code 3010, and 3011 specify that the next input voltage shall be increased to plus 1.2 volts dc.

Codes 3098, 3099, and 3102 specify that the minimum output voltage shall be plus 60 volts dc.

Codes 3106, 3107, and 3110 specify that the maximum output voltage shall be plus 80 volts dc.

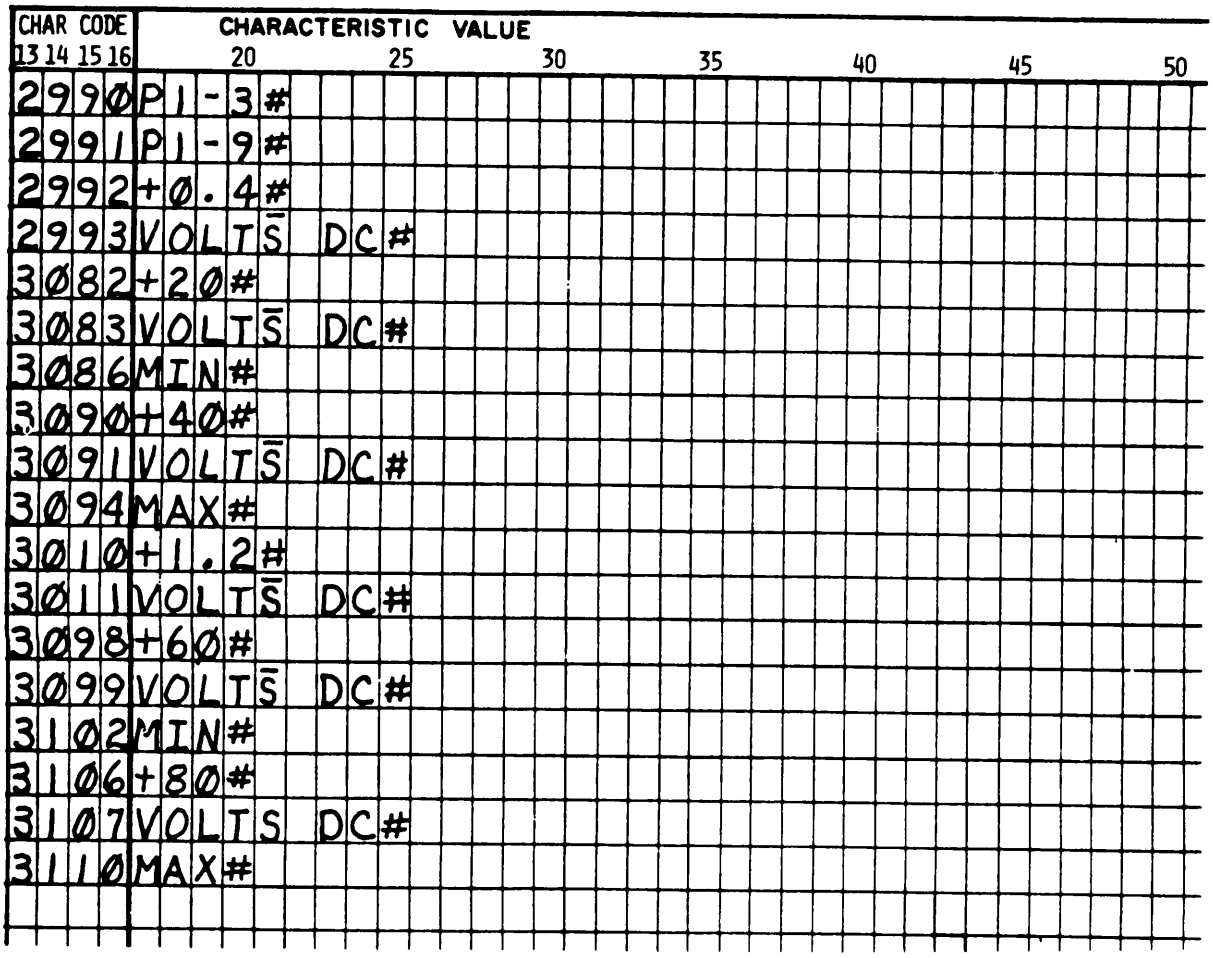

EXAMPLE 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The codes and values entered on the SRS in Example 7 specify the following:

Code 2990 specifies that the test voltage shall be applied at terminals R and S.

Code 2991 specifies that the output voltage shall be measured at terminals F and G.

Codes 2992, and 2993 specify that the initial input signal shall be 0.04 volts ac.

Codes 3082, 3083, 3086, 3090, 3091, and 3094 specify that the initial output signal shall be a minimum of five volts ac and maximum of 15 volts ac.


Code 3085 specifies that the maximum unbalanced voltage with an initial input of 0.04 volts ac shall be two volts.

Codes 3010, and 3011 specify that the input signal voltage shall be increased to 0.40 volts ac.

Codes 3098, 3099, 3102, 3106, 3107, and 3110 specify that the output signal voltage with an input of 0.40 volts ac, shall be a minimum of 13.5 volts ac and a maximum of 20 volts ac.

Code 3109 specifies that the maximum unbalanced voltage with the increased input of 0.40 volts ac shall be 3.5 volts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

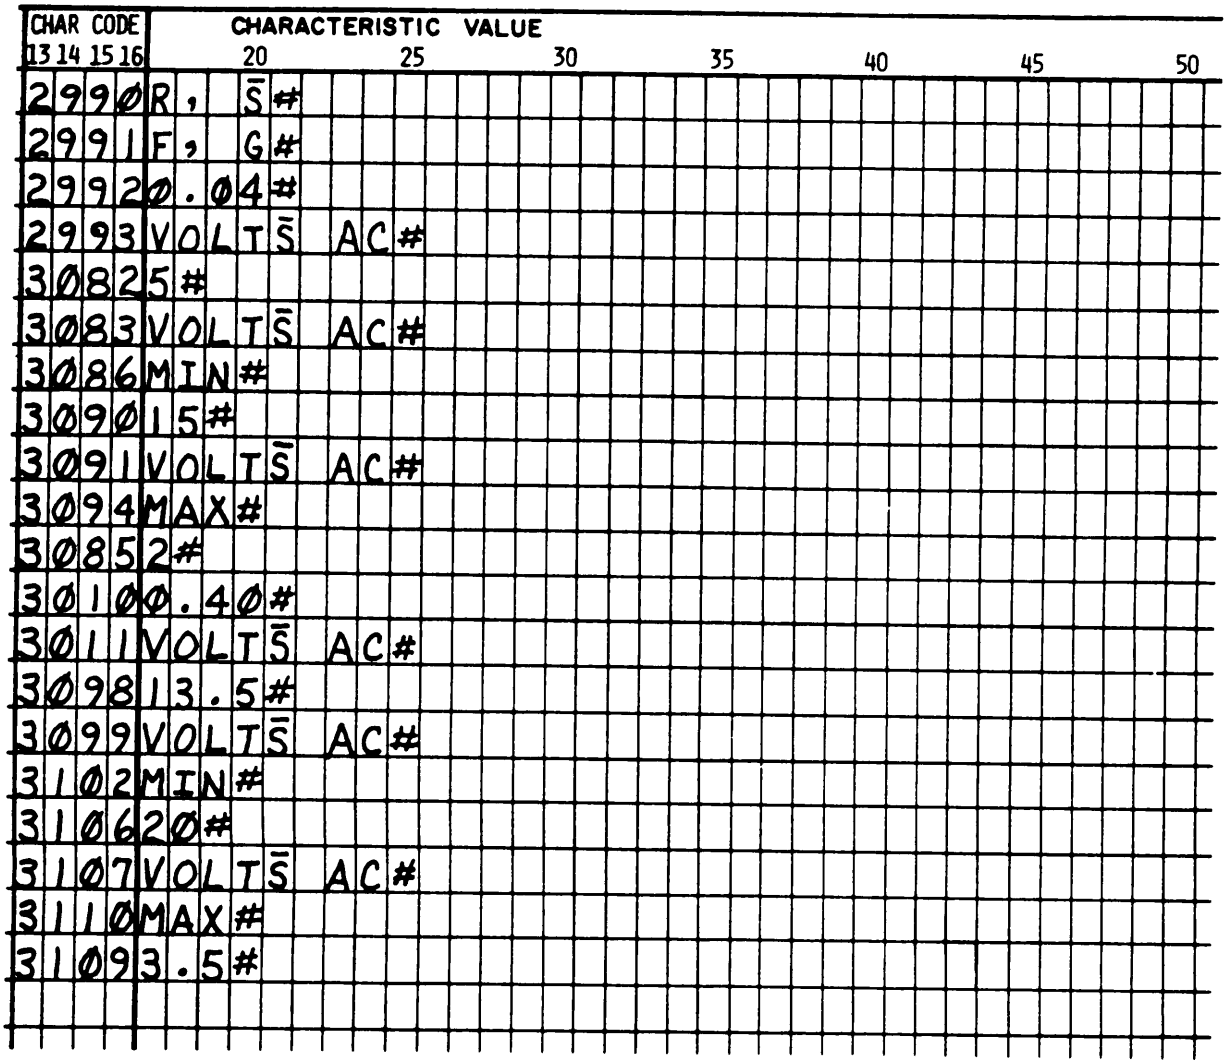

EXAMPLE 7

5.11 Design Characteristics

This MIL-STD-35 part is designed to permit the specifying of different types of amplifiers as shown in the Specification Title Index (1.4.2). Requirements and condition names are common to several of the amplifiers, such as, Gain and Applied Voltage. Likewise, each amplifier type may have a unique requirement or condition name, such as, Velocity Range Switch Position.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The below listed table is designed to permit a user to specify additional necessary combinations of requirements, tests, and conditions for a particular amplifier.

TABLE	TITLE
IV	Frequency Response
v	Impedance
VI	Linearity
VII	Pulse Response
VIII	Spurious Outputs

5.11.1 Frequency

There are ten codes on the SRL applicable to the operating frequencies. It is mandatory to specify the lower and upper limits of an amplifier frequency range or the center frequency of an IF amplifier. Information concerning them is as follows:

Code 1563, 1564, or 1565 and a value, entered on the SRS, will specify the lower limit of the frequency range in hertz, kilohertz, or megahertz, respectively.

Code 1566, 1567, or 1568 and a value, entered on the SRS, will specify the upper limit of the frequency range in hertz, kilohertz, or megahertz, respectively.

Code 1569, 1570, or 1571 and a value, entered on the SRS, will specify the center frequency for intermediate frequency amplifiers in hertz, kilohertz, or megahertz, respectively. These codes are mandatory only for IF amplifiers.

Code 1572 and a value, entered on the SRS, will specify the frequency in megahertz at which gain drops by 3 decibels.

5.11.2 Supply Power

Code 1573 and a value, entered on the SRS, will specify the source supply voltage in direct current.

Codes 1591 and 1592 and values, entered on the SRS, will specify the source supply voltage in alternating current at a frequency in hertz, respectively. If Code 1591 is used, it is mandatory that Code 1592 is used.

Code 1593 and a value, entered on the SRS, will specify the supply voltage regulation in plus or minus percent.

Code 1574 or 1575 and a value, entered on the SRS, will specify the supply current in either milliamperes or amperes, respectively.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1576 and a value, entered on the SRS, will specify the maximum continuous wave input power level in decibels (referenced to one milliwatt).

5.11.3 Phase Linearity

Code 1580 and a value, entered on the SRS, will specify the linearity of the output signal phase in plus or minus degrees. It is mandatory to use Code 1581 when Code 1580 is used.

Code 1581 and a value, entered on the SRS, will specify the frequency in megahertz for the phase linearity.

5.11.4 Reverse Isolation

Code 1582 and a value, entered on the SRS, will specify the minimum reverse isolation in decibels.

5.11.5 Intercept Point

Code 1583 and a value, entered on the SRS, will specify a typical intercept point for intermodulation products in decibels (milliwatt power reference).

5.11.6 Schematic Number

Code 1584 and an electrical schematic drawing number as selected from an applicable document (5.7), entered on the SRS, will specify the circuitry of the amplifier including all test points.

5.11.7 Class Operation Letter

Code 1585 and a letter or letters, entered on the SRS, will specify the class rating of a voltage or power amplifier. An example is Class AB.

5.11.8 Connectors

The codes in Table III, located in Section 8, shall be used to specify the input and output connectors of an amplifier. Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective table cell(s).

The codes in the first column of Table III shall be used to indicate whether the connector is for the input or output. Enter on the SRS the word “INPUT” or “OUTPUT” with a code from this column.

The codes in the second column shall be used to specify the connector type number or series designation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The codes in the third column shall be used to specify the designation of the document that describes the connector design and construction requirements.

The codes in columns four, five and six shall be used to specify the location of the connectors on the applicable figure from Section 7.

For noncylindrical type amplifiers, the selected location of a connector on one or four sides from Figure 454-01 series shall be specified by entering on the SRS a code from the fourth column and a value of one through four.

The location of a connector on either end of a cylindrical type amplifier shall be specified by entering on the SRS a code from the fifth column and one or two.

A connector on the curved surface of a cylindrical type amplifier shall be specified by entering on the SRS a code from the sixth column and an “X”.

5.11.9 Weight, Maximum

There are four codes on the SRL applicable to the weight of the components. Only one code may be selected from the US system of measurements and one code from the SI system of measurements. These codes and information concerning them are as follows:

Code 1586 and a value, entered on the SRS, will specify the maximum weight of the component in ounces. Do not use Code 1586 with Code 1587.

Code 1587 and a value, entered on the SRS, will specify the maximum weight of the component in pounds. Do not use Code 1587 with Code 1586.

Code 1588 and a value, entered on the SRS, will specify the maximum weight of the component in grams. Do not use Code 1588 with Code 1589.

Code 1589 and a value, entered on the SRS, will specify the maximum weight of the component in kilograms. Do not use Code 1589 with Code 1588.

5.11.10 Number of Fins

Code 1590 and a value, entered on the SRS, will specify the quantity of cooling fins.

5.11.11 Altitude Range

There are four codes which may be used to specify operating and nonoperating altitude range in feet or metres. Information concerning them is as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 5060 or Code 5061, or both and a value(s), entered on the SRS, will specify the operating altitude range from sea level to the value specified in feet or metres, respectively.

Code 5062 or Code 5063, or both and a value(s), entered on the SRS, will specify the nonoperating altitude range from sea level to the value specified in feet or metres, respectively.

5.11.12 Temperature

There are two codes applicable to the operating temperature and two codes applicable to the nonoperating temperature. Information concerning them is as follows:

Code 5068 and a value, entered on the SRS, will specify the minimum operating temperature in degrees Celsius.

Code 5069 and a value, entered on the SRS, will specify the maximum operating temperature in degrees Celsius.

Code 5070 and a value, entered on the SRS, will specify the minimum nonoperating temperature in degrees Celsius.

Code 5071 and a value, entered on the SRS, will specify the maximum nonoperating temperature in degrees Celsius.

5.11.13 Mounting Hardware

The codes in Table T of MIL-STD-35 are used to specify mounting hardware.

Code 6947 and an “X”, entered on the SRS, will specify mounting hardware will be furnished with the unit, but not mounted.

Code 6948 and an “X”, entered on the SRS, will specify hardware will e furnished mounted on the unit.

5.12 Acceleration

Code 6249 is the 1006 test code (see 5.4).

Code 6250 is the 1006 except test code (see 5.4).

To detail an acceleration test, Code 6251 or 1600 is mandatory. One acceleration level must also be specified by entering Code 4863, 4864, 4865, 4868, 4892, 4893 or 1601 with an appropriate value. Other codes are optional. Information concerning these codes follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 6251 and an “X”, entered on the SRS, will specify to test in accordance with Method 212 of MIL-STD-202.

Code 4863 and an “X”, entered on the SRS, will specify the test condition letter A shall apply and the acceleration level shall be 20 gravitational units (g) for 5 minutes in both directions in each of three mutually perpendicular axes.

Code 4864 and an “X”, entered on the SRS, will specify the test condition letter A shall apply and the acceleration level shall be 50 gravitational units (g) for 5 minutes in both directions in each of three mutually perpendicular axes.

Code 4865 and an “X”, entered on the SRS, will specify the test condition letter A shall apply and the acceleration level shall be 100 gravitational units (g) for 5 minutes in both directions in each of three mutually perpendicular axes.

Code 4868 and an “X”, entered on the SRS, will specify the test condition letter B shall apply and the acceleration level shall be 10,000 gravitational units (g) for one minute.

Codes 1557 or 1558 and an “X”, entered on the SRS, will specify acceleration shall be in one or both directions, respectively.

Code 6263 and an “X”, entered on the SRS, will specify any suitable mounting method may be used.

Code 6264 and an “X”, entered on the SRS, will specify the normal mounting method shall be used.

Code 6265 and a document designation, entered on the SRS, will specify to mount in accordance with the mounting specified in the designated document. A test name may be necessary (see 5.4).

Code 4893 and a value, entered on the SRS, will specify the test condition letter C shall apply and the acceleration level (g) shall be as specified. This level will be applied for 10 minutes in both directions in each of three mutually perpendicular axes.

Code 1600 and an “X”, entered on the SRS, will specify to test in accordance with MIL-A-8026.

Code 1601 and a value, entered on the SRS, will specify the acceleration level in gravitational units. If Code 1601 is used, it is mandatory that Code 1602 be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1602 and a value, entered on the SRS, will specify the duration in minutes of acceleration in both directions in each of three mutually perpendicular axes.

Code 6271 is the 1006 requirement code (see 5.4).

Code 6272 is the 1006 except requirement code (see 5.4).

To detail requirements, Code 6273 is mandatory; other codes are optional. Information concerning them is as follows:

Code 6273 and an "X", entered on the SRS, will specify there shall be no evidence of physical damage.

Code 6277 and an "X", entered on the SRS, will specify the device shall remain within specified tolerance.

Code 7345 and a value, entered on the SRS, will specify there shall be no discontinuity during test.

The design tests conducted to determine if the parameters remain within specified tolerance after the amplifier is exposed to an environmental test are listed in the SRL under this paragraph number and title. The tests to be conducted shall be specified by entering on the SRS the appropriate codes with an "X".

5.13 Altitude (Low Pressure)

Code 1605 is the 1006 test code (see 5.4).

Code 1606 is the 1006 except test code (see 5.4).

Code 1607 and an "X", entered on the SRS, will specify to test in accordance with Method 500 of MIL-STD-81O.

Code 1608 and a value, entered on the SRS, will specify the duration of operation and measurements in hours.

Code 1609 is the 1006 requirements code (see 5,4).

Code 1610 is the 1006 except requirements code (see 5.4).

Code 1612 and an "X", entered on the SRS, will specify that the specimen shall remain within specified tolerance.

Code 1613 and an "X", entered on the SRS, will specify that there shall be no discontinuity during the test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The design tests conducted to determine if the parameters remain within specified tolerance after the amplifier is exposed to an environmental test are listed in the SRL under this paragraph number and title. The tests to be conducted are specified by entering on the SRS the appropriate codes with an "X".

5.14 Bandwidth and Center Frequency

Code 1615 is the 1006 test code (see 5.4).

Code 1616 is the 1006 except test code (see 5.4).

Code 1617 and a document designation, entered on the SRS, will specify that testing shall be performed in accordance with the document (see 5.7).

Code 1618 and a value, entered on the SRS, will specify the gain control voltage in volts dc.

Codes 1619 and 1620 and values, entered on the SRS, will specify the signal generator frequency range in megahertz. If the frequency range is to be specified, the use of both codes is mandatory.

Code 1621, 1622, or 1623 and a value, entered on the SRS, will specify the number of decibels down from maximum frequency response during measurement of the bandwidth, narrow bandwidth, or broad bandwidth, respectively.

Code 1624 is the 1006 requirement code (see 5.4).

Code 1625 is the 1006 except requirement code (see 5.4).

Codes 1626 and 1627, and value(s), entered on the SRS, will specify the bandwidth limits in megahertz. Both codes are mandatory to specify bandwidth.

Codes 1628 and 1629, and value(s), entered on the SRS, will specify the broad bandwidth limits in megahertz. Both codes are mandatory to specify broad bandwidth.

Code 1630 and a value, entered on the SRS, will specify the overall selectivity curve flatness within plus or minus decibels during the broad bandwidth measurement.

Codes 1631 and 1632, and value(s), entered on the SRS, will specify the narrow bandwidth limits in megahertz. Both codes are mandatory to specify narrow bandwidth.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1633 and a value, entered on the SRS, will specify the overall selectivity curve flatness within plus or minus decibels during narrow bandwidth measurement.

Code 1634 and a value, entered on the SRS, will specify the center frequency of the bandwidth, when measured between three decibel points, in megahertz. If Code 1634 is used, it is mandatory that Code 1635 be used.

Code 1635 and a value, entered on the SRS, will specify the center frequency tolerance in plus or minus megahertz.

5.15 Dielectric Withstanding Voltage at Reduced Barometric Pressure

Code 4883 is the 1006 test code (see 5.4).

Code 4884 is the 1006 except test code (see 5.4).

To detail a dielectric withstanding voltage test at reduced barometric pressure, Codes 6300 and 4886, and either Code 4849 or 4885, are mandatory. Other codes are optional. Information concerning them is as follows:

Code 6300 and an “X”, entered on the SRS, will specify the dielectric withstanding voltage test in accordance with Method 301 of MIL-STD-202 shall be performed at reduced barometric pressure.

Code 4886 and a letter, entered on the SRS, will specify the altitude shall be as specified in test condition letter from Method 105 of MIL-STD-202.

Code 4885 and a value, entered on the SRS, will specify dc test voltage. Do not use Code 4885 with Code 4849.

Code 4849 and a value, entered on the SRS, will specify ac test voltage. Do not use Code 4849 with Code 4885.

Code 6311 and an "X". entered on the SRS. will specify the test voltage shall be applied between terminations tied together and mounting hardware.

Code 6312 and an “X”, entered on the SRS, will specify the test voltage shall be applied between terminations tied together and case.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 4859 and a document designation, entered on the SRS, will specify special preparations in accordance with the document (see 5.7).

Code 6280 and a document designation, entered on the SRS, will specify mounting in accordance with the document (see 5.7).

Code 4891 and a value, entered on the SRS, will specify duration in seconds of voltage application. This code is used only if duration required is other than 60 seconds.

Code 4907 is the 1006 requirement code (see 5.4).

Code 4908 is the 1006 except requirement code (see 5.4).

To detail requirements, Code 4906 is mandatory and others are optional. Information concerning them is as follows:

Code 4906 and an "X", entered on the SRS, will specify there shall be no evidence of flashover, mechanical damage, arcing, or insulation breakdown after test.

Code 4894 and a value, entered on the SRS, will specify maximum leakage current in milliamperes.

Code 4901 and an "X", entered on the SRS, will specify the device shall remain within specified tolerance after test.

5.16 Dielectric Withstanding Voltage at Sea Level

Code 4860 is the 1006 test code (see 5.4).

Code 4861 is the 1006 except test code (see 5.4).

To detail a test method for dielectric withstanding voltage test at sea level, Code 4862 and either Code 4854 or 4855 are mandatory. Other codes are optional. Information concerning them is as follows:

Code 4862 and an "X", entered on the SRS, will specify to test in accordance with Method 301 of MIL-STD-202.

Code 4854 and a value, entered on the SRS, will specify test dc voltage. Do not use Code 4854 with Code 4855.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 4855 and a value, entered on the SRS, will specify test ac voltage. Do not use Code 4855 with Code 4854.

Code 4842 and an "X", entered on the SRS, will specify test voltage shall be applied between terminations tied together and mounting hardware.

Code 4848 and an "X", entered on the SRS, will specify test voltage shall be applied between terminations tied together and case.

Code 4850 and a document designation, entered on the SRS, will specify special preparations in accordance with the document (see 5.7).

Code 4867 and a value, entered on the SRS, will specify duration in seconds of voltage application. This code is used only if duration required is other than 60 seconds.

Code 5000 and a document designation, entered on the SRS, will specify mounting in accordance with the document (see 5.7).

Code 4873 is the 1006 requirement code (see 5.4).

Code 4874 is the 1006 except requirement code (see 5.4).

If requirements are to be detailed for the dielectric withstanding voltage test at sea level, Code 4856 is mandatory; two other codes are optional. Information concerning them is as follows:

Code 4856 and an "X", entered on the SRS, will specify there shall be no evidence of flashover, mechanical damage, arcing, or insulation breakdown after test.

Code 4875 and a value, entered on the SRS, will specify maximum leakage current in milliamperes.

Code 4847 and an "X", entered on the SRS, will specify the device shall remain within specified tolerance after test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.17 Electromagnetic Interference

Code 1862 is the 1006 test code (see 5.4).

Code 1863 is the 1006 except test code (see 5.4).

To detail an electromagnetic interference test, it is mandatory to use at least one code selected from Codes 1864 - 1869. More than one code may be used if required.

Code 1864 and a designation(s), entered on the SRS, will specify the applicable method(s) per the MIL-STD-461 Appendix. Enter the complete method designation (e.g. A-CE1). If more than one method per MIL-STD-461 is required, separate the designations by the word “and” with appropriate spaces.

Code 1865 and a number, entered on the SRS, will specify to test in accordance with MIL-STD-462 and the applicable conducted emission (CE) test method number. Only the number (e.g., 01) is entered with Code 1865.

Code 1866 and a number, entered on the SRS, will specify to test in accordance with MIL-STD-462 and the applicable radiated emission (RE) test method number. Only the number (e.g., 01) is entered with Code 1866.

Code 1867 and a number, entered on the SRS, will specify to test in accordance with MIL-STD-462 and the applicable conducted susceptibility (CS) test method number. Only the number (e.g., 01) is entered with Code 1867.

Code 1868 and a number, entered on the SRS, will specify to test in accordance with MIL-STD-462 and the applicable radiated susceptibility (RS) test method number. Only the (e.g., 01) is entered with Code 1868.

Code 1869 and a number, entered on the SRS, will specify to test in accordance with MIL-STD-461 and the applicable conducted, radiated emission (CRE) test method number. Only the number (e.g., 01) is entered with Code 1869. These methods are for testing in high ambient conditions.

Code 1870 is the 1006 requirement code (see 5.4).

Code 1871 is the 1006 except requirement code (see 5.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1872 and an “X”, entered on the SRS, will specify that the requirements shall be in accordance with the MIL-STD-461 for the test method(s) specified.

5.18 Endurance

Code 1713 is the 1006 test code (see 5.4).

Code 1714 is the 1006 except test code (see 5.4).

Code 1715 and a document designation, entered on the SRS, will specify that testing shall be performed in accordance with the document (see 5.7).

Codes 1716 and 1717 and value(s), entered on the SRS, will specify the duration while cycling of power applied and power turned off in hours, respectively.

Code 1718 and a value, entered on the SRS, will specify the quantity of operational cycles of power applied and turned off.

Code 1719 is the 1006 requirements code (see 5.4).

Code 1720 is the 1006 except requirements code (see 5.4).

The design tests conducted to determine if the parameters remain with specified tolerance after the amplifier is exposed to an environmental test are listed in the SRL under this paragraph and title. The tests to be conducted are specified by enterinq on the SRS the appropriate codes with an “X”.

Code 1722 and an “X”, entered on the SRS, will specify that the specimen shall remain within specified tolerance.

Code 1723 and an “X”, entered on the SRS, will specify that there shall be no discontinuity during the test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.19 Fidelity

Code 1728 is the 1006 test code (see 5.4).

Code 1729 is the 1006 except test code (see 5.4).

Code 1730 and a document designation, entered on the SRS, will specify that testing shall be performed in accordance with the document (see 5.7).

Codes 1731, 1732, or 1733 and an "X", entered on the SRS, will specify the transmitter operating mode as normal, retransmission, or in broadband, respectively.

Code 1734 and a value, entered on the SRS, will specify the minimum transmitter carrier symmetrical modulation in percent.

Code 1735 is the 1006 requirements code (see 5.4).

Code 1736 is the 1006 except requirements code (see 5.4).

Code 1737 and a value, entered on the SRS, will specify the maximum deviation of the amplifier emitted modulated carrier fidelity from the driver fidelity in plus or minus decibels. Codes 1738 and 1739 are mandatory if Code 1737 is used.

Codes 1738 and 1739 and value(s), entered on the SRS, will specify the frequency range in hertz, respectively during determination of fidelity deviation.

5.20 Frequency Response

Code 1741 is the 1006 test code (see 5.4).

Code 1742 is the 1006 except test code (see 5.4).

Code 1743 and a document designation, entered on the SRS, will specify that testing shall be performed in accordance with the document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

To detail test inputs per Table IV. Code 1744 is mandatory. Test inputs are specified with applicable codes from columns 2 thru 15.

Code 1744 and an “X”, entered on the SRS, will specify that the test inputs are specified using codes from the Frequency Response Table, Table IV in Section 8.

The codes in Table IV, Frequency Response, are used to specify the output power or voltage with discrete frequencies or variable swept frequency ranges and variable input voltages. The table also provides for specifying resistive loads, channel identification, type of tone control, and velocity range switch positions. Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective cell(s). Only those lines from which codes are used will print. Columns 1 thru 15 will appear in Section 4 of the MSE. Columns 1 and 16 thru 20 will appear in Section 3 of the MSE.

Codes in the second column entitled CHANNEL are used to specify the input channel name, e.g., Carbon Microphone channel for certain audio amplifiers.

Codes in column three entitled TONE CONT (Tone Control) are used to specify whether the tone control of the amplifier is to be set at bass or treble prior to test.

Codes in the fourth column entitled VEL RNG SW POS (Velocity Range Switch Position) are used to specify switch settings for a frequency Bandpass or Bandreject Response test of an audio amplifier used to amplify and filter detected doppler-frequency signals.

Codes in columns five, six and seven are used to specify the value of applied test voltages including polarity, their units of measure, and tolerances in percent.

Codes in the eighth through the tenth columns are used to specify one or more discrete test frequencies.

Codes in the llth through the 14th columns are used to specify the frequency ranges that are swept during the test.

Codes in the 15th column are used to specify the resistive load in ohms of the amplifier output whenever the test set-up requires it.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Codes in the Response columns entitled SIGNAL VOLTAGE (cols. 16 through 18) are used to specify the value of response in volts including polarity, the units, and the tolerance in percentage.

Codes in columns 19 and 20 are used to specify the value of response in minimum or maximum decibels with proper polarity indicated.

Code 1745 from the SRL and a value, entered on the SRS, will specify the nominal source voltage in volts dc during the signal output level adjustment.

Codes 1746 and 1747 and an "X", entered on the SRS, will specify that the frequency test band type shall be pass or reject, respectively.

Codes 1748 and 1749 and values, entered on the SRS, will specify the power in watts delivered by the signal generator to the load resistor at a frequency in hertz, respectively.

Code 1750 is the 1006 requirements code (see 5.4).

Code 1751 is the 1006 except requirements code (see 5.4).

To detail requirements per Table IV, Code 1752 is mandatory. Requirements are specified with applicable codes from columns 16 thru 20 as previously discussed.

Code 1752 and an "X", entered on the SRS, will specify that the detail requirements are in Table IV.

Code 1753 and an "X", entered on the SRS, will specify that the response curve shall be free of peaks and dips between test frequencies.

The codes and values entered on the SRS in Example 8 specify the following:

Codes 2500 and 2506 from Table IV specify the input channel of the amplifier being tested as the dynamic microphone and phonograph.

Code 2501 specifies that the tone control of the amplifier shall be set at "Treble" during the test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 2560 and 2561 specify that the first frequency for response measurement shall be 50 hertz.

Codes 2567, 2568, 2574, and 2575 specify that the second and third response measurement frequencies shall be 400 hertz and 10 kilohertz, respectively.


Code 2630 specifies that the load resistor at the amplifier output shall be 250 ohms.

Code 2635 specifies that the response at a frequency of 50 hertz shall be not more than minus 17 decibels.

Code 2641 specifies that the response at a frequency of 400 hertz shall be not more than minus one decibel.

Codes 2646 and 2647 specify that the response at 10 kilohertz shall be a minimum of zero decibels and not more than minus six decibels.

Codes 1744 and 1752 from the SRL specify that the test inputs and requirements are from the Frequency Response Table, Table IV, respectively.

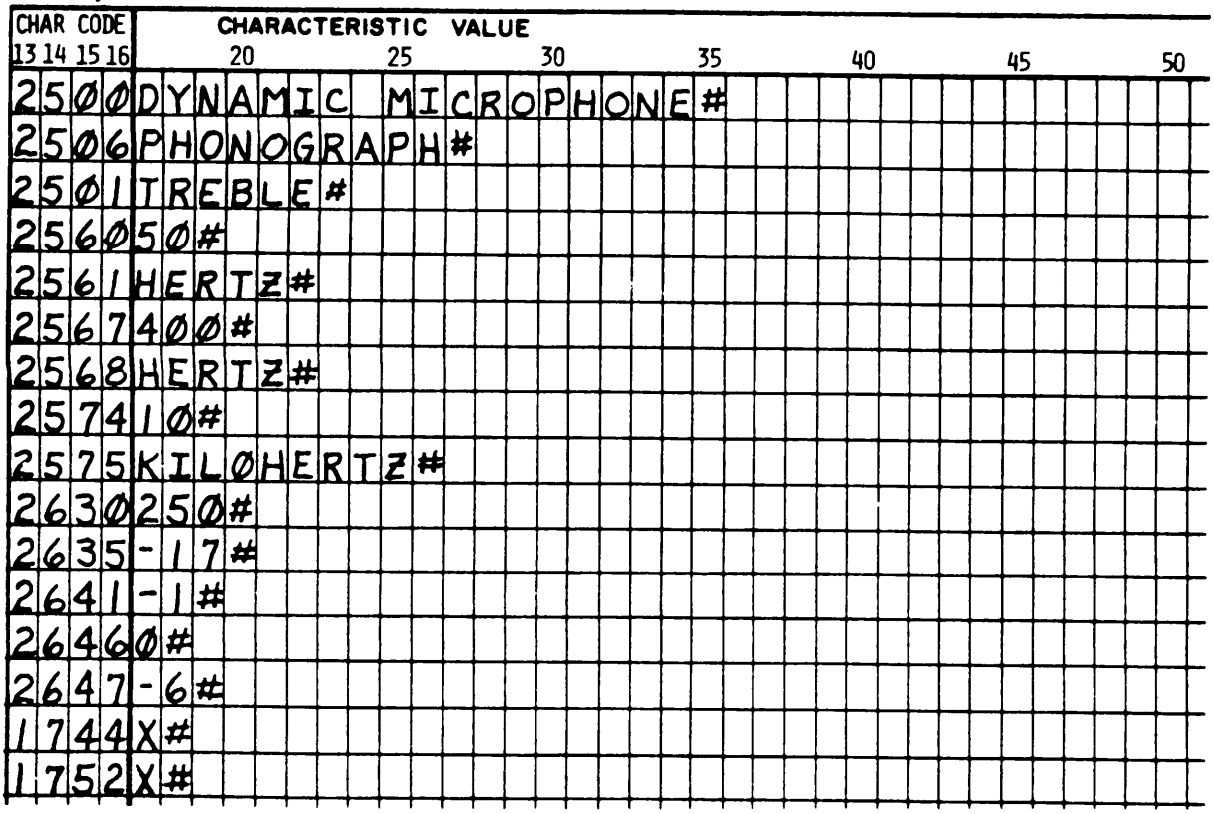

EXAMPLE 8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The codes from Table IV and values entered on the SRS in Example 9 specify the following:

Code 2502 specifies that the Velocity Range switch shall be in position 70-325 for the test.

Codes 2503 and 2504 specifies that the input. voltage shall be 30 millivolts rms.


Codes 2563, 2564, 2565, and 2566 specify the first test frequency range from zero to three kilohertz.

Codes 2570, 2571, 2572, and 2573 specify the second test frequency range from 35 to 150 kilohertz. The switch position and the voltage input remained the same.

Codes 2631, 2632, and 2633 specify the output as 30 millivolts peak to peak with a five percent tolerance.

Codes 1744 and 1752 from the SRL specify that the test inputs and requirements are from the Frequency Response Table, Table IV, respectively.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

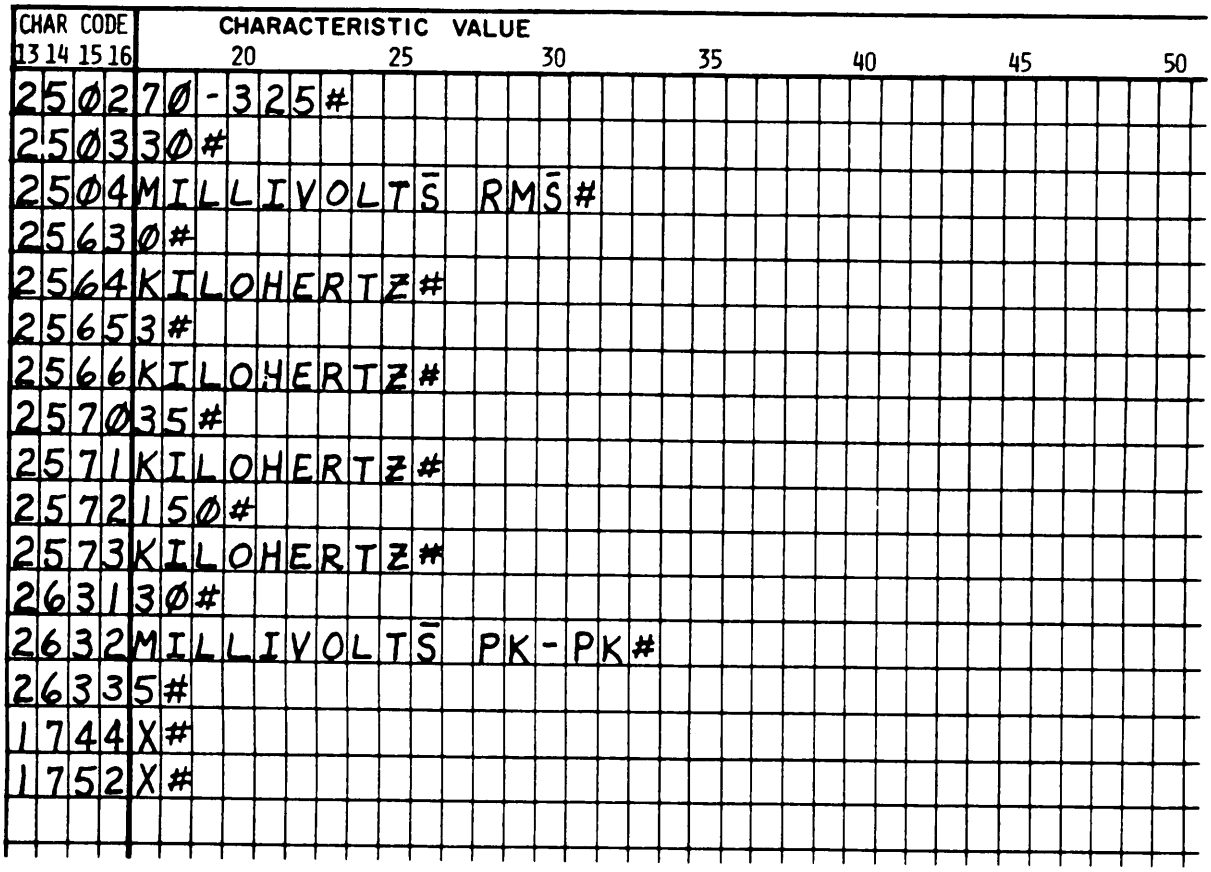

EXAMPLE 9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.21 Fungus

Code 4753 is the 1006 test code (see 5.4).

Code 4754 is the 1006 except test code (see 5.4).

To detail a fungus test, Code 4755 is mandatory. Code 4756 is optional.

Code 4755 and an "X", entered on the SRS, specifies to test in accordance with Method 508 of MIL-STD-810.

Code 4756 and a value, entered on the SRS, will specify duration of test in days (if other than 28 days).

Code 4759 is the 1006 requirements code (see 5.4).

Code 4760 is the 1006 except requirements code (see 5.4).

Code 4761 and an "X", entered on the SRS, will specify all external materials shall be nonnutrient to fungus growth or shall be suitably treated to retard fungus growth. The manufacturer shall verify by certification that all external materials are fungus resistant or shall perform the fungus test as specified. When the fungus test is performed, there shall be no evidence of fungus growth on the external surfaces.

Code 4762 and an "X", entered on the SRS, will specify all external materials shall be nonnutrient to fungus growth or shall be suitably treated to retard fungus growth. When the fungus test specified is performed, there shall be no evidence of fungus growth on the external surfaces.

5.22 High Temperature

Code 6216 is the 1006 test code (see 5.4).

Code 6217 is the 1006 except test code (see 5.4).

To detail a high temperature test, it is mandatory to use Codes 6218 and 6219. Other codes are optional.

Code 6218 and an "X", entered on the SRS, will specify to test in accordance with Method 501 of MIL-STD-810.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 6219 and a Roman numeral, entered on the SRS, will specify the applicable procedure number.

Code 6220 and a value, entered on the SRS, will specify the storage temperature in degrees Celsius. This code is only used when a temperature other than 71 degrees Celsius is required.

Code 6221 and a value, entered on the SRS, will specify the duration in hours of the high temperature storage. This code is only used when a storage other than 48 hours is required.

Code 6222 and a value, entered on the SRS, will specify the highest operating temperature in degrees Celsius at which the device under test is designed to operate.

Code 6224 and a value, entered on the SRS, will specify the operating time in minutes at the temperature specified with Code 6222. Do not use Code 6224 with Code 6225.

Code 6225 and a value, entered on the SRS, will specify the operating time in hours at the temperature specified with Code 6222. Do not use Code 6225 with Code 6224.

Code 6227 is the 1006 requirements code (see 5.4).

Code 6228 is the 1006 except requirements code (see 5.4).

To detail a high temperature requirements, it is mandatory to use Code 6229.

Code 6229 and an “X”, entered on the SRS, will specify there shall be no evidence of physical damage after exposure to high temperature.

The design tests conducted to determine if the parameters remain within specified tolerance after the amplifier is exposed to an environmental test are listed in the SRL under this paragraph number and title. The tests to be conducted are specified by entering on the SRS the appropriate codes with an “X”.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.23 Humidity

Code 4787 is the 1006 test code (see 5.4).

Code 4788 is the 1006 except test code (see 5.4).

To detail a humidity test, Codes 4853 and 4890 are mandatory. The other codes are optional. Information concerning them is as follows:

Code 4853 and an "X", entered on the SRS, will specify to test in accordance with Method 103 of MIL-STD-202.

Code 4890 and a test condition letter, entered on the SRS, will specify the test letter entered shall apply.

Code 6207 and an "X", entered on the SRS, will specify the dielectric withstanding voltage test at sea level shall be performed at high humidity.

Code 6206 and an "X", entered on the SRS, will specify the dielectric withstanding voltage test at sea level shall be performed after drying.

Code 4797 is the 1006 requirement code (see 5.4).

Code 4798 is the 1006 except requirement code (see 5.4).

Code 4799 and an "X", entered on the SRS, will specify there shall be no evidence of corrosion or physical damage.

Code 4791 and an "X", entered on the SRS, will specify the device shall remain within specified tolerance.

Code 1477 and an "X", entered on the SRS, will specify there shall be no evidence of flashover, arcing, or insulation breakdown when the dielectric withstanding voltage test at sea level is performed.

Code 4795 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms when measured at high humidity.

Code 4805 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms when measured after drying.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 4813 and a value, entered on the SRS, will specify the maximum leakage current in milliamperes when dielectric withstanding voltage test at sea level is performed at high humidity.

Code 4803 and a value, entered on the SRS, will specify the maximum leakage current in milliamps when dielectric withstanding voltage test at sea level is performed after drying.

The design tests conducted to determine if the parameters remain within specified tolerance after the amplifier is exposed to an environmental test are listed in the SRL under this paragraph number and title. The tests to be conducted are specified by entering on the SRS the appropriate codes with an "X".

5.24 Immersion

Code 4808 is the 1006 test code (5.4).

Code 4809 is the 1006 except test code (5.4).

Code 4810 and an "X", entered on the SRS, will specify to test in accordance with Method 104 of MIL-STD-202.

Code 4811 and a test condition letter, entered on the SRS, will specify the test condition letter entered shall apply. Codes 481O and 4811 are mandatory if the test method is to be detailed. Other codes are optional.

Code 4812 and a value, entered on the SRS, will specify test measurement shall be made within this number of hours after final cycle. This code is used if the time span is other than 24 hours.

Code 4814 and a value, entered on the SRS, will specify the test measurements shall be not made until this number of hours has elapsed after final cycle. This code is used if the time span is other than 4 hours.

Code 4818 is the 1006 requirements code (5.4).

Code 4819 is the 1006 except requirements code (5.4).

Code 4820 and an "X", entered on the SRS, will specify no evidence of physical damage. If requirements are to be detailed, Code 4820 is mandatory; other codes are optional.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 4822 and an "X", entered on the SRS, will specify the device shall remain within specified tolerance.

Code 4825 and a value, entered on the SRS, will specify that the insulation resistance in megohms shall not be less than the value entered.

The design tests conducted to determine if the parameters remain within specified tolerance after the amplifier is exposed to an environmental test are listed in the SRL under this paragraph number and title. The tests to be conducted are specified by entering on the SRS the appropriate codes with an "X".

5.25 Impedance

Code 1798 is the 1006 test code (see 5.4).

Code 1799 is the 1006 except test code (see 5.4).

Code 1800 and a document designation, entered on the SRS, will specify that testing shall be performed in accordance with the document (see 5.7).

To detail test inputs per Table V, Code 1797 is mandatory. Test inputs are specified with applicable codes from column 2 thru 7.

Code 1797 and an "X", entered on the SRS, will specify that the test inputs are specified using codes from the IMPEDANCE TABLE, Table V in Section 8.

The codes in Table V, Impedance, are used to specify the input or output impedance, VSWR, input voltages, and test frequencies. Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective cell(s). Only those lines from which codes are used will print. Columns 1 thru 7 will appear in Section 4 of the MSE. Columns 1, 8, 9, and 10 will appear in Section 3 of the MSE.

Codes in columns 2, 3, and 4 are used to specify the applied voltage.

Codes in columns 5, 6, and 7 are used to specify the applied discrete test frequency or frequencies.

Codes in columns 8 and 9 are used to specify the impedance in ohms and whether the measurement is for input or output impedance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Codes in column 10 are used to specify the maximum input VSWR.

Code 1801 on the SRL is the 1006 requirement code (see 5.4).

Code 1802 is the 1006 except requirements code (see 5.4).

To detail requirements per Table V, Code 1803 is mandatory. Requirements are specified with applicable codes from columns 8, 9, and 10.

Code 1803 and an “X”, entered on the SRS, will specify that the requirements are specified using codes from the IMPEDANCE TABLE, Table V in Section 8.

The codes and values entered on the SRS in Example 10 specify the following:

Codes 2800 and 2801 specify that the applied voltage shall be minus 26 volts dc.

Codes 2803, 2804, 2812, 2813, 2821, and 2822 specify that the test frequencies shall be 2, 10, and 29 megahertz.


Code 2806 specifies that the amplifier’s input impedance shall be 50 ohms.

Code 2807 specifies that the measurement is for input impedance.

Code 2808 specifies that the maximum VSWR with an input impedance of 50 ohms shall be 1.3.

Codes 1797 and 1803 from the SRL specify that the test inputs and requirements are from the Impedance Table, Table V, respectively.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

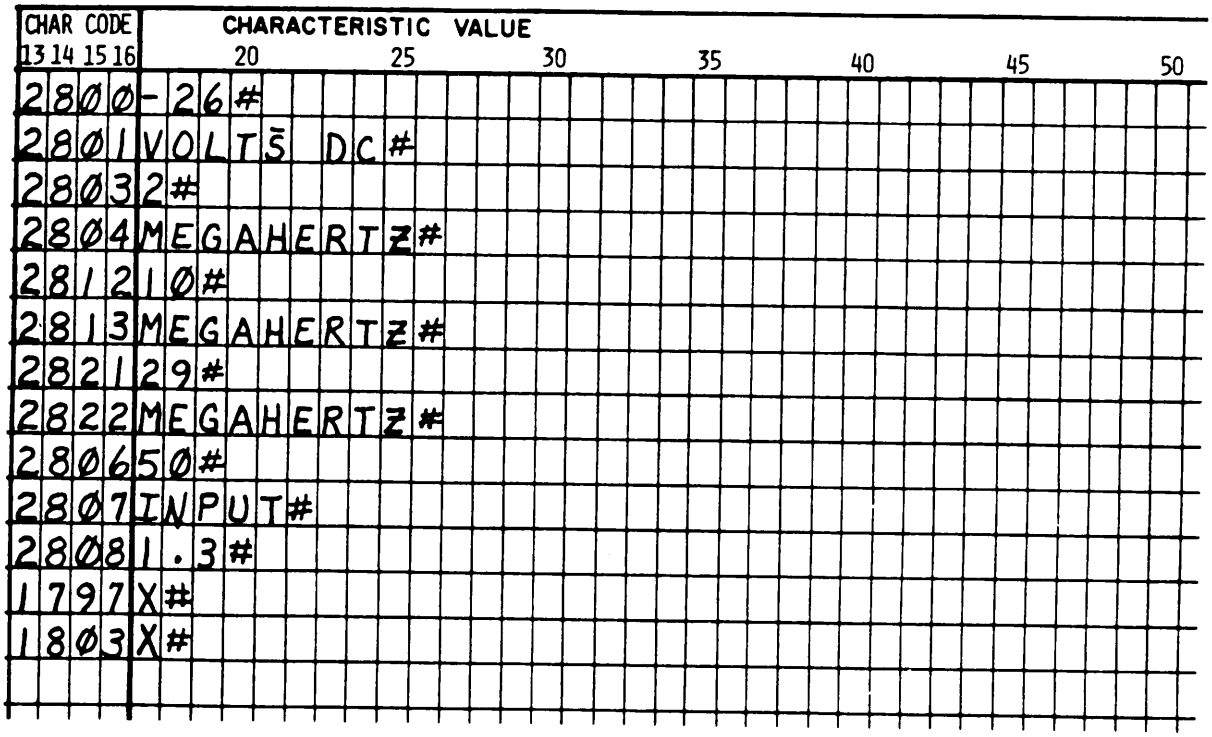

EXAMPLE 10

5.26 Insulation Resistance

Code 1370 is the 1006 test code (see 5.4).

Code 1371 is the 1006 except test code (see 5.4).

To detail an insulation resistance test, it is mandatory that Codes 1511 and Code 1378 or Code 1373 be entered on the SRS. Code 1511 and an “X”, entered on the SRS, will specify the inuslation resistance test method shall be as specified in Method 302 of MIL-STD-202.

Code 1373 and a value, entered on the SRS, will specify the test voltage in volts dc.

Code 1378 and a letter, entered on the SRS, will specify the applicable test condition letter from Method 302 of MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1376 and a value, entered on the SRS, will specify the electrification time in seconds if other than two minutes.

Code 1377 and a value, entered on the SRS, will specify the maximum measurement error in percent permitted at the insulation resistance value required if other than 10 percent.

Code 1497 and an “X”, entered on the SRS, will specify the points of application of test voltage shall be between leads tied together and mounting hardware.

Code 1498 and an “X”, entered on the SRS, will specify the points of application of test voltage shall be between leads tied together and case.

Code 1520 and a document designation, entered on the SRS, will specify special preparations including mounting, shall be in accordance with the designated document (see 5.7).

Code 1372 and a value, entered on the SRS, will specify the test temperature in degrees Celsius if other than as specified in MIL-STD-202 standard test conditions, or the first test temperature if the insulation resistance test is to be performed at two temperatures.

Code 1381 and a value, entered on the SRS, will specify the second test temperature in degrees Celsius when the insulation resistance test is to be performed at two temperatures.

Code 1383 and a value, entered on the SRS, will specify plus or minus test temperature tolerance in degrees Celsius.

Code 1379 is the 1006 requirement code (see 5.4).

Code 1380 is the 1006 except requirement code (see 5.4).

To detail requirements, Code 1407 is mandatory. Other codes are optional.

Code 1407 and an “X”, entered on the SRS, will specify that there shall be no evidence of physical damage.

Code 1386 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms when no temperature is specified with Codes 1372 or 1381.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1384 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms at the first test temperature specified with Code 1372.

Code 1387 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms at the second test temperature specified with Code 1381.

Code 1388 and an "X", entered on the SRS, will specify the device shall remain within specified tolerance.

5.27 Linearity

Code 1805 is the 1006 test code (see 5.4).

Code 1806 is the 1006 except test code (see 5.4).

Code 1807 and a document designation, entered on the SRS, will specify that testing shall be performed in accordance with the document (see 5.7).

To detail test inputs per Table VI, Code 1808 is mandatory. Test inputs are specified with applicable codes from columns 2 thru 8.

Code 1808 and an "X", entered on the SRS, will specify that the test inputs are specified using codes from the LINEARITY TABLE, Table VI in Section 8.

The codes in Table VI, Linearity, are used to specify the applied and output voltages in order to determine their proportionality at certain frequencies.

Codes selected from the table entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective table cell(s). Only those lines from which codes are used will print. Columns 1 thru 8 will appear in Section 4 of the MSE. Columns 1 and 9 thru 11 will appear in Section 3 of the MSE.

Codes in the columns 2, 3, and 4 are used to specify the value of applied voltages, including polarity, units of measure and tolerances in percent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Codes in columns 5, 6, and 7 are used to specify the applied discrete test frequency.

Codes in column 8 are used to specify the test load in ohms.

Codes in columns 9, 10, 11 are used to specify the value of output voltages, including polarity, units of measure and percent tolerance.

Code 1808 on the SRL is the 1006 requirement code (see 5.4).

Code 1809 is the 1006 except requirement code (see 5.4).

To detail requirements per Table VI, Code 1811 is mandatory. Requirements are specified with applicable codes from columns 9, 10, and 11.

Code 1811 and an "X", entered on the SRS, will specify that the requirements are specified using codes from the LINEARITY TABLE, Table VI in Section 8.

The codes from Table VI and values entered on the SRS in Example 11 specify the following:

Codes 2900, 2901, 2907, 2908, 2914, and 2915 specify that the applied voltages shall be 0.056, 0.18 and 0.56 millivolts rms.


Codes 2903 and 2904 specify that the test frequency shall be 1000 hertz.

Code 2906 specifies that the load resistance shall be 16 ohms.

Codes 2935, 2936, 2937, 2938, 2939, 2940, 2941, 2942, 2943 specify that the output voltages shall be 1.8, 5.8, and 18.0 millivolts peak to peak with a tolerance of 10 percent. The output then is a linear function within plus or minus ten percent.

Codes 1808 and 1811 from the SRL specify that the test inputs and requirements are from the Linearity Table, Table VI, respectively.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

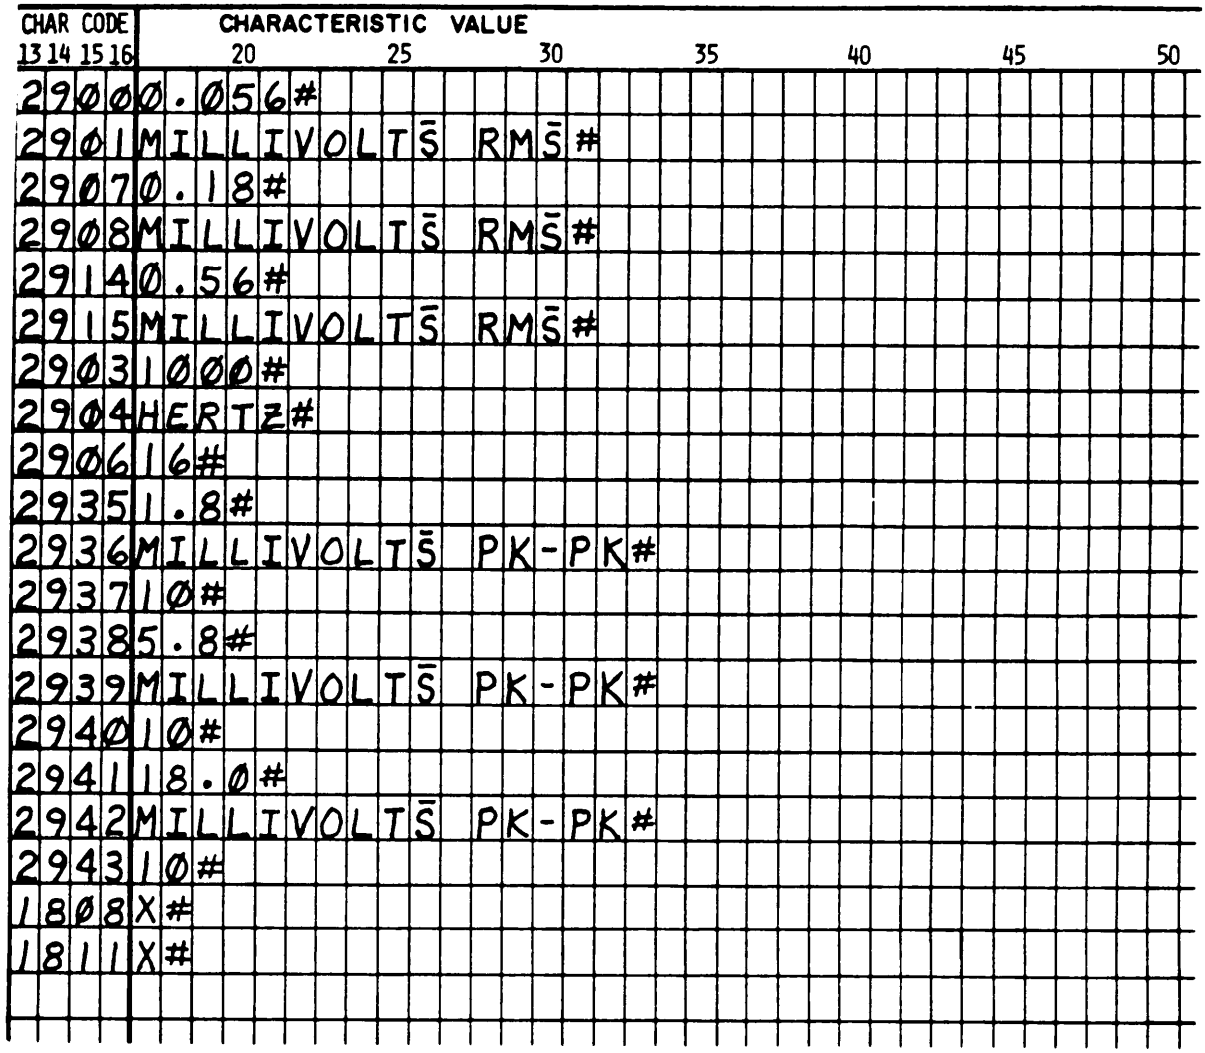

EXAMPLE 11

5.28 Low Temperature

Code 6230 is the 1006 test code (see 5.4).

Code 6231 is the 1006 except test code (see 5.4).

To detail a low temperature test, it is mandatory to use Code 6232. Other codes are optional.

Code 6232 and an “X”, entered on the SRS, will specify to test in accordance with Method 502 of MIL-STD-810.

Code 6234 and a value, entered on the SRS, will specify the storage temperature in degrees Celsius. This code is only used when a temperature other than -57 degrees Celsius is required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 6235 and a value, entered on the SRS, will specify the duration in hours of the low temperature storage. This code is only used when a storage other than 24 hours is required.

Code 6236 and a value, entered on the SRS, will specify the lowest operating temperature in degrees Celsius at which the device under test is designed to operate.

Code 6237 and a value, entered on the SRS, will specify the chamber air velocity in feet per second where the heat transfer rate from the surface of the test item is important.

Code 6238 and a value, entered on the SRS, will specify the chamber air velocity in metres per second where the heat transfer rate from the surface of the test item is important.

Code 6315 or 6316 and a value, entered on the SRS, will specify the operation time at low temperature in minutes and hours, respectively. Do not use these codes together.

Code 6317 is the 1006 requirements code (see 5.4).

Code 6318 is the 1006 except requirements code (see 5.4).

To detail low temperature requirements, it is mandatory to use Code 6319.

Code 6319 and an “X”, entered on the SRS, will specify there shall be no evidence of physical damage.

The design tests conducted to determine if the parameters remain within specified tolerance after the amplifier is exposed to an environmental test are listed in the SRL under this paragraph number and title. The tests to be conducted are specified by entering on the SRS the appropriate codes with an “X”.

5.29 Moisture Resistance

Code 1390 is the 1006 test code (see 5.4).

Code 1391 is the 1006 except test code (see 5.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

To detail a moisture resistance test, there are ten codes available. None of these codes is mandatory. Codes 4980 and 4981 must not be used together. Information concerning them is as follows:

Code 1397 and an "X", entered on the SRS, will specify to test in accordance with Method 106 of MIL-STD-202.

Code 4981 and a value, entered on the SRS, will specify the loading voltage dc. Do not use Code 4981 with Code 4980.

Code 4980 and a value, entered on the SRS, will specify the loading voltage ac. Do not use Code 4980 with Code 4981.

Code 4985 and an "X", entered on the SRS, will specify Step 7a of Method 106 of MIL-STD-202 is not applicable.

Code 4986 and an "X", entered on the SRS, will specify Step 7b of Method 106 of MIL-STD-202 is not applicable.

Code 1449 and a document designation, entered on the SRS, will specify mounting in accordance with the document (see 5.7).

Code 4983 and an "X", entered on the SRS, will specify the dielectric withstanding voltage test at sea level shall be performed at high humidity.

Code 4984 and an "X", entered on the SRS, will specify the dielectric withstanding voltage test at sea level shall be performed after drying.

Code 1399 is the 1006 requirement code (see 5.4).

Code 1400 is the 1006 except requirement code (see 5.4).

To detail requirements, there are 17 codes applicable to the moisture resistance test. Only Code 1396 is mandatory. Information concerning them is as follows:

Code 1396 and an "X", entered on the SRS, will specify no evidence of corrosion or physical damage.

Code 1398 and an "X", entered on the SRS, will specify the device shall remain within specified tolerance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1394 and an “X”, entered on the SRS, will specify there shall be no evidence of flashover, arcing, or insulation breakdown when the dielectric withstanding voltage test at sea level is performed.

Code 1432 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms when measured at high humidity.

Code 1406 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms when measured after drying.

Code 1429 and a value, entered on the SRS, will specify the maximum leakage current in milliamperes when dielectric withstanding voltage test at sea level is performed at high humidity.

Code 1404 and a value, entered on the SRS, will specify the maximum leakage current in milliamperes when dielectric withstanding voltage test at sea level is performed after drying.

The design tests conducted to determine if the parameters remain within specified tolerance after the amplifier is exposed to an environmental test are listed in the SRL under this paragraph number and title. The tests to be conducted are specified by entering on the SRS the appropriate codes with an “X”.

5.30 Pulse Response

Code 1849 is the 1006 test code (see 5.4).

Code 1850 is the 1006 except test code (see 5.4).

Code 1851 and a document designation, entered on the SRS, specifies that testing shall be in accordance with the document (see 5.7).

To detail test inputs per Table VII, Code 1852 is mandatory. Test inputs are specified with applicable codes from column 2 thru 14.

Code 1852 and an “X”, entered on the SRS, will specify that the test inputs are specified using codes from the PULSE RESPONSE TABLE, Table VII in Section 8.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The codes in Table VII, Pulse Response, are used to specify applied pulse amplitudes, widths, and frequencies with output or response pulse characteristics, amplitudes and maximum tilt. Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the selected data in the respective table cell(s). Only those lines from which codes are used will print. Column 1 thru 14 will appear in Section 4 of the MSE. Columns 1 and 15 thru 22 will appear in Section 3 of the MSE.

Codes in column 2 are used to specify the name of the test, e.g., AGC Voltage.

Columns and the code use for the remaining columns are explained below.

COLUMN	CODE USE
3	Amplitude of applied pulse in plus or minus volts.
4	Applied digital pulse in logical one or logical zero.
5	Amplitude of applied pulse in milliamperes.
6	Amplitude of applied pulse in microampere.
7	Tolerance limits of applied voltage or current pulse in plus or minus percent.
8	Width of the applied pulse in microseconds.
9	Width of the applied pulse in nanoseconds.
10	Tolerance limits of the pulse width in plus or minus percent.
11	Value of the pulsed frequency.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

COLUMN	CODE USE (Cont)
12	Frequency units of hertz, kilohertz, megahertz, or pulses per second.
13	Tolerance limits of the frequency in plus or minus percent.
14	The schematic designation of the point of pulse application (5.11.6).
15	Characteristics of the pulse such as, decay time, duration, rise time, etc. listed on the SRL.
16	Pulse characteristics time in micro-seconds.
17	Pulse characteristics time in nanoseconds.
18	Tolerance limits of the pulse charac-teristics in plus or minus percent.
19	Minimum amplitude of the pulse response in plus or minus volts.
20	Tolerance limits of the output pulse in plus or minus percent.
21	Maximum tilt of the pulse in percent.
22	The schematic designation of the point of pulse response or output measurement (5.11.6).

Code 1853 from the SRL and a value, entered on the SRS, will specify the number of pulses in the train.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1854 is the requirement code (see 5.4).

Code 1855 is the except requirement code (see 5.4).

To detail requirements per Table VII, Code 1860 is mandatory. Requirements are specified with applicable codes from columns 15 thru 22.

Code 1860 and an "X", entered on the SRS, will specify the requirements are specified using codes from the PULSE RESPONSE TABLE, Table VII in Section 8.

Code 1856 and a value, entered on the SRS, will specify the maximum pulse train droop in percent.

Code 1857 and a value, entered on the SRS, will specify the maximum amplitude difference of two pulses in volts.

Codes 1858 and 1859 and values, entered on the SRS, will specify the minimum alternate amplifier output energy in ergs within a period of microseconds after triggering. If Code 1858 is used, it is mandatory that Code 1859 be used.

The codes from Table VII and values entered on the SRS in Example 12 specify the following:

Code 3200 specifies that the test shall be for AGC Voltage.

Code 3210 specifies a no input signal.

Code 3320 specifies the point of application of an input signal as P1.

Codes 3370 and 3380 specify that the minimum response voltage shall be minus 0.7 plus or minus 10 percent.


Code 3400 specifies the point of response or measurement as terminal J1-5.

Codes 3241, 3251, 3321, 3291, 3301, and 3311 specify that a current pulse of 13 microampere plus or minus 10 percent at a frequency of 220 pulses per second plus or minus ten percent shall be applied at P1.

Codes 3371 and 3401 specify that the response shall be a minimum of plus 1 volt measured at J1-5.

Codes 1852 and 1860 from the SRL specify that the test inputs and requirements are from the Pulse Response Table, Table VII, respectively.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

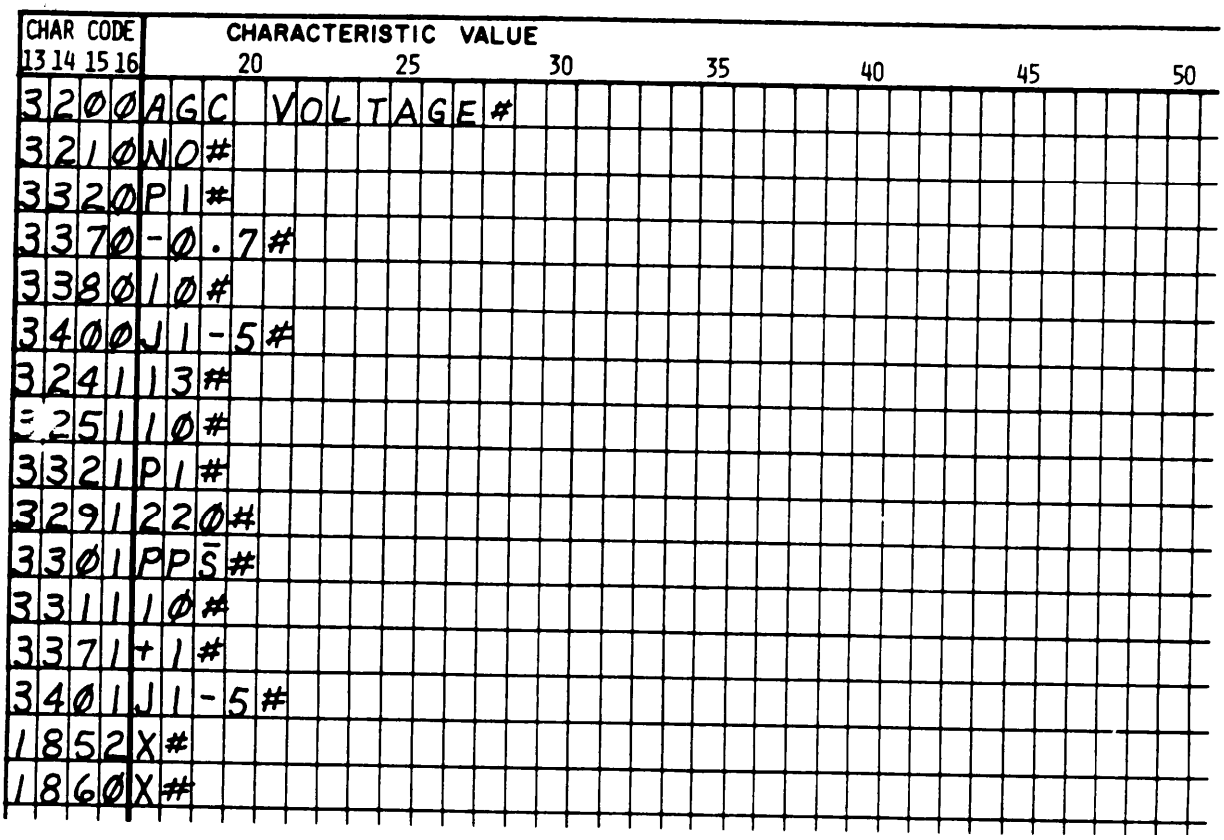

EXAMPLE 12

The codes from Table VII and values entered on the SRS in Example 13 specify the following:

Code 3200 specifies that the test shall measure video response.

Codes 3210 and 3250 specify that the applied pulse shall have an amplitude of plus four volts plus or minus 25 percent.

Code 3220 specifies that the applied signal shall be digital logical one.

Codes 3260 and 3280 specify that the width of the applied pulse shall be one microsecond plus or minus ten percent.

Codes 3290, 3300 and 3310 specify the frequency of the applied pulse shall be one kilohertz plus or minus ten percent.

Code 3320 specifies that the pulse shall be applied at J1-A2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Codes 3330, 3340, and 3360 specify that the output pulse width shall be one microsecond within 30 percent tolerance.

Codes 3370 and 3380 specify that the minimum amplitude of plus five volts of the output pulse shall be plus or minus ten percent.

Code 3390 specifies that the maximum tilt of the output pulse shall be ten percent.

Code 3400 specifies that the response shall be measured at J1-A1.

Codes 1852 and 1860 from the SRL specify that the test inputs and requirements are from the Pulse Response Table, Table VII, respectively.

CHAR CODE 13 14 15 16	CHARACTERISTIC VALUE (20 25 30 35 40 45 50)
3200	VIDEO#
3210	+4#
3250	25#
3220	1#
3260	1#
3280	10#
3290	1#
3300	KILOHERTZ#
3310	10#
3320	J1-A2#
3330	WIDTH#
3340	1#
3360	30#
3370	+5#
3380	10#
3390	10#
3400	J1-A1#
1852	X#
1860	X#

EXAMPLE 13

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.31 Salt Spray

Code 4769 is the 1006 test code (see 5.4).

Code 4770 is the 1006 except test code (see 5.4).

To detail a salt spray test, Codes 4771 and 4772 are mandatory. Code 4773 is optional.

Code 4771 and an “X”, entered on the SRS, will specify to test in accordance with Method 101 of MIL-STD-202.

Code 4772 and a test condition letter, entered on the SRS, will specify the test condition letter entered shall apply.

Code 4773 and a document designation, entered on the SRS, will specify that special mounting shall be in accordance with the document. The applicable test name from the referenced document shall be entered on the SRS in addition to the document designation (see 5.7).

Code 4877 is the 1006 requirement code (see 5.4).

Code 4878 is the 1006 except requirement code (see 5.4).

Code 4782 and an “X”, entered on the SRS, will specify no evidence of corrosion, physical damage or degradation of performance.

Code 4785 and an “X”, entered on the SRS, will specify the device shall remain within specified tolerance.

The design tests conducted to determine if the parameters remain within specified tolerance after the amplifier is exposed to an environmental test are listed in the SRL under this paragraph number and title. The tests to be conducted are specified by entering on the SRS the appropriate codes with an “x”.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.32 Sand and Dust

Code 4951 is the 1006 test code (see 5.4).

Code 4952 is the 1006 except test code (see 5.4).

Code 4960 and an “X”, entered on the SRS, will specify to test in accordance with Method 110 of MIL-STD-202.

Code 4872 and a number (1 or 3, or both), entered on the SRS, will specify that during the test, the test specimen shall be operating during steps 1 or 3, or both of Method 110 of MIL-STD-202. Code 6299 is mandatory if Code 4872 is used.

Code 6299 and a value, entered on the SRS, will specify the duration of operation in hours in each specified step.

Code 1539 and an “X”, entered on the SRS, will specify the specimen orientation shall be changed during the test.

Code 4956 and an “X”, entered on the SRS, will specify a second 6-hour test at 63 degrees Celsius shall be required immediately following temperature stabilization in step 2 of Method 110, MIL-STD-202.

Code 4957 is the 1006 requirement code (see 5.4).

Code 4958 is the 1006 except requirement code (see 5.4).

Code 4959 and an “X”, entered on the SRS, will specify there shall be no evidence of dust penetration.

Code 4954 and an “X”, entered on the SRS, will specify the device shall remain within specified tolerance.

The design tests conducted to determine if the parameters remain within specified tolerance after the amplifier is exposed to an environmental test are listed in the SRL under this paragraph number and title. The tests to be conducted are specified by entering on the SRS the appropriate codes with an "X".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.33 Shock

Code 7310 is the 1006 test code (see 5.4).

Code 7311 is the 1006 except test code (see 5.4).

To detail a shock test, it is mandatory to use Code 7312 and to specify a procedure number. When procedures I, III or IV are specified, codes to specify the applicable figure, amplitude and duration are mandatory. Other codes are optional.

Code 7312 and an "X", entered on the SRS, will specify to test in accordance with Method 516 of MIL-STD-810.

Code 7313 and a Roman numeral I, entered on the SRS, will specify that procedure number I from Method 516 of MIL-STD-810 shall apply. When code 7313 is used, it is mandatory to use Code 7317 or 7318, and Codes 7305 and 7306.

Code 7317 and an "X", entered on the SRS, will specify that Figure 516-1 applies for determination of amplitude and duration of the saw-tooth pulse.

Code 7318 and an "X", entered on the SRS, will specify that Figure 516-2 applies for determination of amplitude and duration of the sine pulse.

Code 7305 and a letter, entered on the SRS, will specify the peak amplitude of the shock pulse in g's. The choice is letters A or B as shown in Figures 516-1 or 516-2.

Code 7306 and a letter, entered on the SRS, will specify the nominal duration of the shock pulse in milliseconds. The choice is letters C or D as shown in Figure 516-1 or 516-2.

Code 6327 and a Roman numeral II, entered on the SRS, will specify that procedure number II from Method 516 of MIL-STD-810 shall apply.

Code 6338 and a Roman numeral III, entered on the SRS, will specify that procedure number III from Method 516 of MIL-STD-810 shall apply. When Code 6338 is used, it is mandatory to use Code 6339 or 6340, and Codes 6341 and 6342.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 6339 and an “X”, entered on the SRS, will specify that Figure 516-1 applies for determination of amplitude and duration of the saw-tooth pulse.

Code 6340 and an “X”, entered on the SRS, will specify that Figure 516-2 applies for determination of amplitude and duration of the sine pulse.

Code 6341 and a letter, entered on the SRS, will specify the peak amplitude of the shock pulse in g’s. The choice is letters A or B as shown in Figures 516-1 or 516-2.

Code 6342 and a letter, entered on the SRS, will specify the nominal duration of the shock pulse in milliseconds. The choice is letters C or D as shown in Figure 516-1 or 516-2.

Code 6343 and a Roman numeral IV, entered on the SRS, will specify that procedure number IV from Method 516 of MIL-STD-81O shall apply. When Code 6343 is used, it is mandatory to use Code 6344 or 6345 and Codes 6346 and 6347.

Code 6344 and an “X”, entered on the SRS, will specify that Figure 516-1 applies for determination of amplitude and duration of the saw-tooth pulse.

Code 6345 and an “X”, entered on the SRS, will specify that Figure 516-2 applies for determination of amplitude and duration of the sine pulse.

Code 6346 and a letter, entered on the SRS, will specify the peak amplitude of the shock pulse in g’s. The choice is letters A or B as shown in Figures 516-1 or 516-2.

Code 6347 and a letter, entered on the SRS, will specify the nominal duration of the shock pulse in milliseconds. The choice is letters C or D as shown in Figure 516-1 or 516-2.

Code 6348 and a Roman numeral V, entered on the SRS, will specify that procedure number V from Method 516 of MIL-STD-81O shall apply.

Code 6349 and a Roman numeral VI, entered on the SRS, will specify that procedure number VI from Method 516 of MIL-STD-81O shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 7307 and a value, entered on the SRS, will specify the test temperature in degrees Celsius when other than ambient temperature is required.

Code 7308 and a value, entered on the SRS, will specify the temperature tolerance in degrees Celsius. Use Code 7308 only if Code 7307 has been used.

Code 7309 and an "X", entered on the SRS, will specify that operation of the device during the test is required.

Code 7314 is the 1006 requirement code (see 5.4).

Code 7315 is the 1006 except requirement code (see 5.4).

To detail shock requirements, it is mandatory to use Code 7316. Other codes are optional.

Code 7316 and an "X", entered on the SRS, will specify there shall be no evidence of physical damage.

The design tests conducted to determine if the parameters remain within specified tolerance after the amplifier is exposed to an environmental test are listed in the SRL under this paragraph number and title. The tests to be conducted are specified by entering on the SRS the appropriate codes with an "X".

5.34 Shock, High Impact

Code 1485 is the 1006 test code (see 5.4).

Code 1486 is the 1006 except test code (see 5.4).

To detail a high impact shock test, Code 1482 and Codes 1488, 1478, or 1468 are mandatory. Codes 1488, 1478, and 1468 shall be not used together. Information concerning them is as follows:

Code 1482 and an "X", entered on the SRS, will specify to test in accordance with Method 207 of MIL-STD-202.

Code 1488 and a fixture number, entered on the SRS, will specify the applicable mounting fixture for the high impact shock test. Only the number is entered on the SRS. The number is selected from 207-4A, 207-4B, 207-5, or 207-6 as shown in Method 207 of MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1478 and an “X”, entered on the SRS, will specify any suitable mounting fixture may be used for the high impact shock test.

Code 1468 and a document designation, entered on the SRS, will specify mounting shall be in accordance with the document. The applicable test name shall be entered on the SRS in addition to the document designation (see 5.7).

Code 1493 is the 1006 requirement code (see 5.4).

Code 1494 is the 1006 except requirement code (see 5.4).

To detail requirements, there are 13 codes available. Only Code 1495 is mandatory. Information concerning them is as follows:

Code 1495 and an “X”, entered on the SRS, will specify no evidence of physical damage.

Code 1464 and an “X”, entered on the SRS, will specify the device shall remain within specified tolerance.

Code 1451 and an “X”, entered on the SRS, will specify there shall be no discontinuity during the test.

The design tests conducted to determine if the parameters remain within specified tolerance after the amplifier is exposed to an environmental test are listed in the SRL under this paragraph number and title. The tests to be conducted are specified by entering on the SRS the appropriate codes with an “X”.

5.35 Spurious Outputs

Code 1905 is the 1006 test code (see 5.4).

Code 1906 is the 1006 except test code (see 5.4).

Code 1907 and a document designation, entered on the SRS, will specify to test in accordance with the document (see 5.7).

To detail test inputs per Table VIII, Code 1908 is mandatory. Test inputs are specified with applicable codes from columns 2 thru 16.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1908 and an "X", entered on the SRS, will specify that the test inputs are specified using codes from the SPURIOUS OUTPUTS TABLE, Table VIII in Section 8.

The codes in Table VIII, Spurious Outputs, are used to specify applied voltages, including polarity, frequencies, load impedances, tone control, test condition, and output levels of voltage and power for Distortion, Hum, or Noise. Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective table cell(s). Only those lines from which codes are used will print. Columns 1 thru 16 will appear in Section 4 of the MSE. Columns 1 and 17-thru-22 will appear in Section 3 of the MSE.

The code use for each column is explained below.

COLUMN	CODE USE
3	Condition of test, e.g., "All Controls Closed", "Phone Open", and "Radio Open" for Hum Level test.
4	Tone control setting of amplifier at zero, bass or treble prior to test.
5	Settings or position of the Velocity Range Switch during measurement of noise and distortion.
6,7,8	Values of applied test voltages, including polarity, their units of measure, and tolerances in percent.
9,10,11	Values of applied discrete test frequencies, units of measure, and tolerance levels.
12,13,14,15	Values and units of measure of lower and upper limits of applied frequency range.
16	Impedance or resistive test load of the amplifier.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

COLUMN	CODE USE (Cont)
17,18,19,20	Response or output voltage values, including polarity, units of measure, tolerance in percentage, and whether min or max. Due to space limitations, use min or max.
21	Maximum output power limits in plus or minus decibels.
22	Maximum percentage of signal output distortion.

Code 1910 from the SRL and a value, entered on the SRS, will specify the RF modulation level measurement in percent of the carrier.

Codes 1912 and 1913 specify the rated audio frequency power output in watts and an audio frequency input in milliwatts while determining the signal to noise ratio.

Codes 1914 and 1915 specify the audio frequency input in volts ac at a frequency in kilohertz for the measurement of signal to noise ratio. If Code 1914 is used, it is mandatory that Code 1915 be used.

Code 1916 is the requirement code (see 5.4).

Code 1917 is the except requirement code (see 5.4).

To detail requirements per Table VIII, Code 1918 is mandatory. Requirements are specified with applicable codes from columns 17 thru 22.

Code 1918 and an “X”, entered on the SRS, will specify that the requirements are specified using codes from the SPURIOUS OUTPUTS TABLE, Table VIII in Section 8.

Code 1919 and a value, entered on the SRS, will specify the minimum third order intermodulation distortion limits in decibels.

Codes 1920 and 1921 and values, entered on the SRS, will specify the maximum envelope distortion in percent at a modulation level in percent. If Code 1920 is used, it is mandatory that Code 1921 be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1922 and an “X”, entered on the SRS, will specify that the output sine wave shall have no spurious oscillations but with partial clipping acceptable.

Code 1923 and a value, entered on the SRS, will specify the minimum decibels that all nonharmonic spurious outputs shall be down from the desired output level.

Code 1924 and a value, entered on the SRS, will specify the minimum attenuation in decibels of all harmonically related signals.

Codes 1925, 1926, and 1927 and values, will specify the bipolar noise amplitude in volts peak to peak, a tolerance of plus and minus volts peak to peak, with an output in microampere, respectively. If Code 1925 is used, it is mandatory that Code 1926 be used.

Codes 1928 and 1929 and values, entered on the SRS, will specify the maximum percentage increase in noise amplitude as the output varies in plus or minus microampere. If Code 1928 is used, it is mandatory that Code 1929 be used.

Code 1930 and a value, entered on the SRS, will specify the minimum decibels that the hum and noise output shall be below the output level of either of two equal amplitude tones modulating the transmitter to rated peak envelope RF power.

Code 1931 and a value, entered on the SRS, will specify the minimum signal to noise ratio in decibels.

The codes from Table VIII and values entered on the SRS in Example 14 specify the following:

Code 3500 specifies that the amplifier shall be operated under standard test conditions for a distortion test.


Codes 3545, 3546, 3548, and 3549 specify that the applied voltage shall be 0.22 volts rms at a frequency of 1000 hertz.

Codes 3639 and 3715 specify that with a load impedance of 100 ohms the distortion shall not exceed five percent.

Codes 3644 and 3721 specify that with a load impedance of 600 ohms the distortion shall not exceed ten percent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Codes 1908 and 1918 specify that the test inputs and requirements are from the Spurious Outputs Table, Table VIII, respectively.

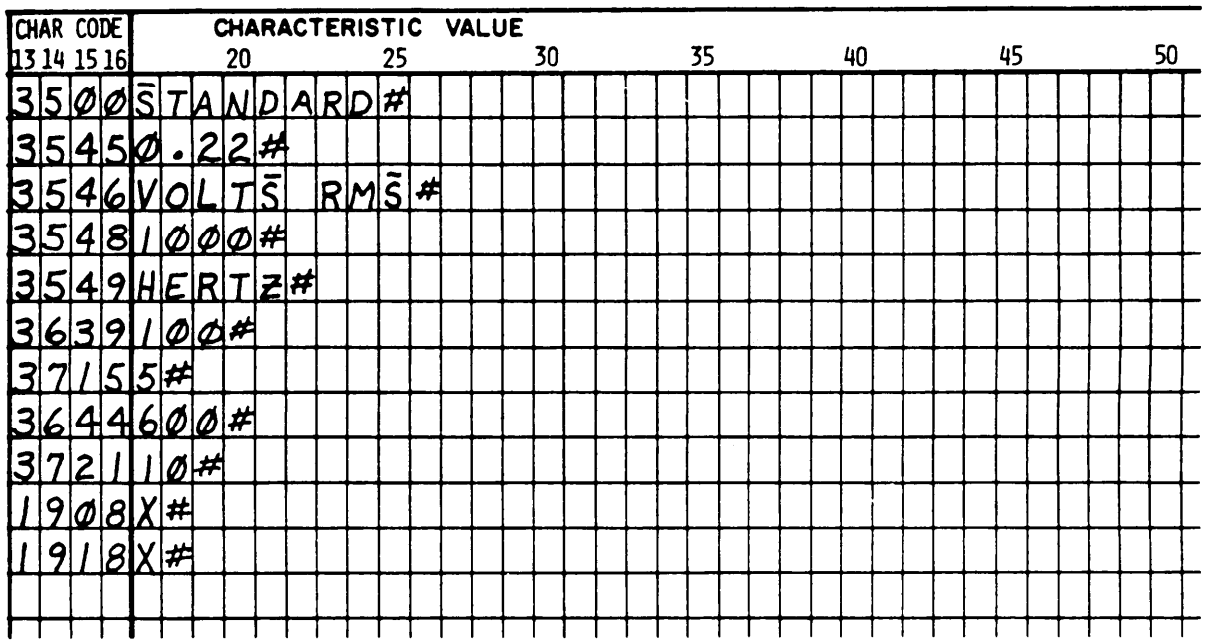

EXAMPLE 14


The codes from Table VIII and values entered on the SRS in Example 15 specify the following:

Codes 3617, 3618, and 3619 specify that the applied voltage shall be 250 microvolt plus or minus five percent for a noise test.

Codes 3782, 3783, and 3785 specify that the maximum output voltage shall be one microvolt.

Codes 1908 and 1918 from the SRL specify that the test inputs and requirements are from the Spurious Outputs Table, Table VIII, respectively.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

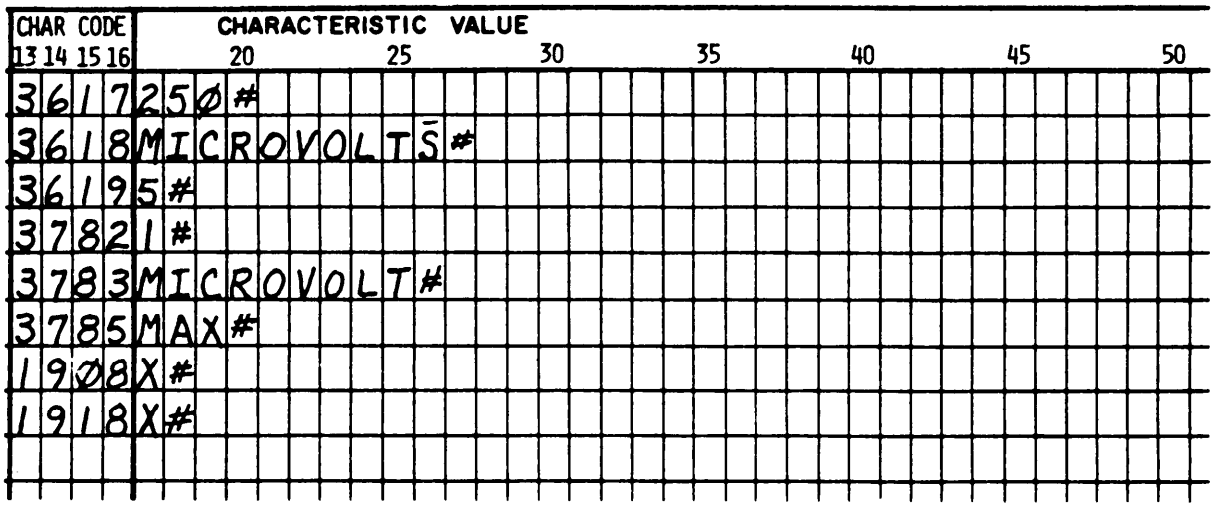

EXAMPLE 15

The codes from Table VIII and values entered on the SRS in Example 16 specify the following:

Code 3519 specifies that the tone control shall be set at zero for a hum test.

Code 3581 specifies that the input circuit shall be open.


Code 3518 and 3750 specify that the maximum hum limit with the test condition of the controls closed shall be minus 40 decibels.

Codes 3521 and 3756 specify that the maximum hum limit with the phone open shall be minus 40 decibels.

Codes 3524 and 3762 specify that the maximum hum limit with the carbon microphone open shall be minus 29 decibels.

Codes 1908 and 1918 from the SRL specify that the test inputs and requirements are from the Spurious Outputs Table, Table VIII, respectively.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

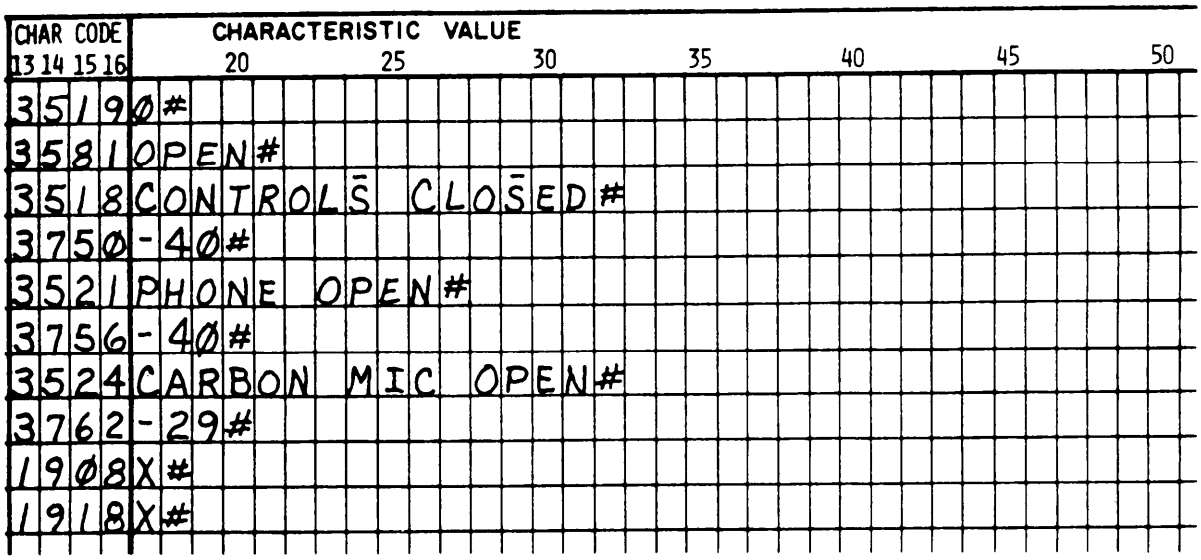

EXAMPLE 16

5.36 Stability

Code 1940 is the 1006 test code (see 5.4).

Code 1941 is the 1006 except test code (see 5.4).

Code 1942 and a document designation, entered on the SRS, will specify that testing shall be performed in accordance with the document (see 5.7).

Code 1943 and a value, entered on the SRS, will specify the applied test voltage in volts dc.

Codes 1944 and 1945 and values, entered on the SRS, will specify the applied test voltage in volts ac at a frequency in hertz. If Code 1944 is used, it is mandatory that Code 1945 be used.

Code 1946 is the 1006 requirement code (see 5.4).

Code 1947 is the 1006 except requirement code (see 5.4).

Code 1948 and an “X”, entered on the SRS, will specify that there shall be no drift in gain or spurious oscillations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1949 and an "X", entered on the SRS, will specify that there shall be no evidence of regeneration.

Code 1950 and an "X", entered on the SRS, will specify that there shall be no damage and evidence of instability with input terminated in either open or short circuits.

Code 1951 and an "X", entered on the SRS, will specify that there shall be no damage and evidence of instability with output terminated in either open or short circuits.

Code 1952 or 1953 and a value, entered on the SRS, will specify the maximum output voltage variation in plus or minus volts dc or plus or minus volts ac, respectively.

Code 1954 and an "X", entered on the SRS, will specify that there shall be no flattening at top of applied sine wave or indication of oscillations.

5.37 Temperature Altitude

Code 1956 is the 1006 test code (see 5.4).

Code 1957 is the 1006 except test code (see 5.4).

Code 1958 and an "X", entered on the SRS, will specify to test in accordance with Method 504 of MIL-STD-81O.

Code 1959 and a value, entered on the SRS, will specify the duration of operation and measurements in hours.

Code 1960 and a number, entered on the SRS, will specify the equipment category.

Code 1961 is the 1006 requirement code (see 5.4).

Code 1962 is the 1006 except requirement code (see 5.4).

The design tests conducted to determine if the parameters remain within specified tolerance after the amplifier is exposed to an environmental test are listed in the SRL under this paragraph number and title. The tests to be conducted are specified by entering on the SRS the appropriate codes with an "X".

Code 1964 and an "X", entered on the SRS, will specify that there shall be no evidence of physical damage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1965 and an "X", entered on the SRS, will specify that the device shall remain within specified tolerance.

Code 1966 and an "X", entered on the SRS, will specify that there shall be no discontinuity during the test.

5.38 Thermal Shock

Code 4712 is the 1006 test code (see 5.4).

Code 4713 is the 1006 except test code (see 5.4).

To detail a thermal shock test in accordance with MIL-STD-202, it is mandatory to use Codes 4714 and 4715.

Code 4714 and an "X", entered on the SRS, will specify to test in accordance with Method 107 of MIL-STD-202.

Code 4715 and a letter, entered on the SRS, will specify the applicable test condition letter.

Code 4719 and a document designation, entered on the SRS, will specify mounting shall be in accordance with the document (see 5.7).

To detail a thermal shock test, in accordance with MIL-E-16400, Codes 1968 and 1969 are mandatory.

Code 1968 and an "X", entered on the SRS, will specify to test in accordance with MIL-E-16400.

Code 1969 and a number, entered on the SRS, will specify the equipment class number in MIL-E-16400.

Code 4720 is the 1006 requirements code (see 5.4).

Code 4722 is the 1006 except requirements code (see 5.4).

Code 4723 and an "X", entered on the SRS, will specify no evidence of physical damage. This code is mandatory when requirements are to be detailed after the thermal shock test.

Code 4726 and an "X", entered on the SRS, will specify the device shall remain within specified tolerance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The design tests conducted to determine if the parameters remain within specified tolerance after the amplifier is exposed to an environmental test are listed in the SRL under this paragraph number and title. The tests to be conducted are specified by entering on the SRS the appropriate codes with an "X".

5.39 Vibration, High Frequency

Code 1445 is the 1006 test code (5.4).

Code 1446 is the 1006 except test code (5.4).

To detail the high frequency vibration test, Code 1447 and Code 1448 are mandatory. Other codes are optional.

Code 1447 and an "X", entered on the SRS, will specify to test in accordance with Method 204 of MIL-STD-202.

Code 1448 and a letter, entered on the SRS, will specify the applicable test condition letter as selected from Method 204 of MIL-STD-202.

There are three codes available to specify the method of mounting. Only one may be used. Information concerning them is as follows:

Code 4709 and an "X", entered on the SRS, will specify any suitable mounting method may be used.

Code 4708 and an "X", entered on the SRS, will specify normal usage mounting means shall be used.

Code 4707 and a document designation, entered on the SRS, will specify to mount in accordance with the document (5.7).

There are two codes available to specify the method of determining mechanical resonance. Only one of the codes may be entered. Information concerning them is as follows:

Code 1533 and an "X", entered on the SRS, will specify mechanical resonance shall be monitored visually by means of a strobotac.

Code 1534 and an "X", entered on the SRS, will specify mechanical resonance shall be monitored by electrical output indicators.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1454 is the 1006 requirement code (5.4).

Code 1455 is the 1006 except requirement code (5.4),

Code 1456 and an "X", entered on the SRS, will specify no evidence of physical damage. This code is mandatory when requirements are to be detailed after the high frequency vibration test.

Code 1469 and an "X", entered on the SRS, will specify the device shall remain within specified tolerance.

Code 1473 and an "X", entered on the SRS, will specify there shall be no discontinuity during the test.

The design tests conducted to determine if the parameters remain within specified tolerance after the amplifier is exposed to an environmental test are listed in the SRL under this paragraph number and title. The tests to be conducted are specified by entering on the SRS the appropriate codes with an "X".

5.40 Vibration, Low Frequency

Code 1465 is the 1006 test code (5.4).

Code 1466 is the 1006 except test code (5.4).

Code 1467 and an "X", entered on the SRS, will specify to test in accordance with Method 201 of MIL-STD-202. To detail the low frequency vibration test, Code 1467 is mandatory. Other codes are optional.

Code 1470 and a value, entered on the SRS, will specify the duration in hours of vibration per axis. This code should only be used when the required vibration per axis is other than 2 hours as specified in Method 201 of MIL-STD-202.

There are three codes available to specify the method of mounting. Only one may be used. Information concerning them is as follows:

Code 4731 and an "X", entered on the SRS, will specify any suitable mounting method may be used.

Code 4730 and an "X", entered on the SRS, will specify normal mounting means shall be used.

Code 4729 and a document designation, entered on the SRS, will specify to mount in accordance with the document (5.7).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

There are three codes available to specify the direction of motion. These may be used as required.

Code 1535 and an "X", entered on the SRS, will specify motion shall be parallel to the longitudinal axis.

Code 1536 and an "X", entered on the SRS, will specify motion shall be perpendicular to the longitudinal axis.

Code 1537 and an "X", entered on the SRS, will specify motion shall be in each of three mutually perpendicular axes.

Code 1474 is the 1006 requirement code (5.4).

Code 1475 is the 1006 except requirement code (5.4).

Code 1476 and an "X", entered on the SRS, will specify no evidence of physical damage. This code is mandatory when requirements are to be detailed after the low frequency vibration test.

Code 1480 and an "X", entered on the SRS, will specify the device shall remain within specified tolerance.

Code 1490 and an "X", entered on the SRS, will specify there shall be no discontinuity during the test.

The design tests conducted to determine if the parameters remain within specified tolerance after the amplifier is exposed to an environmental test are listed in the SRL under this paragraph number and title. The tests to be conducted are specified by entering on the SRS the appropriate codes with an "X".

5.41 Vibration, Random

Code 1425 is the 1006 test code (5.4).

Code 1426 is the 1006 except test code (5.4).

Code 1427 and an "X", entered on the SRS, will specify to test in accordance with Method 214 of MIL-STD-202. To detail the random vibration test, Codes 1427, 1428, and 1431 or 1438 are mandatory. Other codes are optional.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1428 and a number and letter, entered on the SRS, will specify the applicable test condition number and letter as selected from Method 214 of MIL-STD-202. Enter the number (I or II) and follow with the letter, for example, IB or IIK.

It is mandatory that one duration of application per axis be specified. Information concerning codes is as follows:

Code 1438 and a value, entered on the SRS, will specify the duration in minutes of the random excitation per axis. The options are 3 or 15 minutes. Do not use Codes 1438 with Code 1431.

Code 1431 and a value, entered on the SRS, will specify the duration in hours of the random excitation per axis. The options are 1.5 and 8 hours. Do not use Code 1431 with Code 1438.

There are three codes to specify the monitoring instrumentation of the excitation. Only one may be selected.

Code 1452 and an "X", entered on the SRS, will specify any suitable system may be used to monitor excitation.

Code 1453 and an "X", entered on the SRS, will specify the use of a calibrated ac to dc converter and a strip chart recorder to monitor excitation.

Code 1459 and an "X", entered on the SRS, will specify the use of a calibrated oscilloscope to monitor excitation.

Code 1430 and a value, entered on the SRS, will specify the quantity of vibration monitoring test points.

Code 1439 or 1462 may be used to specify the location of the test point(s).

Code 1439 and an "X", entered on the SRS, will specify any suitable location(s) is permitted to mount the monitoring test points.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1462 and an “X”, entered on the SRS, will specify the monitoring test points shall be mounted as close as practical to the test specimen.

There are three codes available to specify the method of mounting. Only one may be used. Information concerning them is as follows:

Code 4977 and an “X”, entered on the SRS, will specify any suitable mounting method may be used.

Code 4976 and an “X”, entered on the SRS, will specify normal mounting means shall be used.

Code 4975 and a document designation, entered on the SRS, will specify to mount in accordance with the document. The applicable test name from the referenced document shall be entered in addition to the document designation (5.7).

Code 1434 is the 1006 requirement code (5.4).

Code 1435 is the 1006 except requirement code (5,4).

Code 1436 and an “X”, entered on the SRS, will specify no evidence of physical damage. This code is mandatory when requirements are to be detailed after the random vibration test.

Code 1538 and an “X”, entered on the SRS, will specify the device shall remain within specified tolerance.

Code 1374 and an “X”, entered on the SRS, will specify there shall be no discontinuity during the test.

The design tests conducted to determine if the parameters remain within specified tolerance after the amplifier is exposed to an environmental test are listed in the SRL under this paragraph number and title. The tests to be conducted are specified by entering on the SRS the appropriate codes with an “X”.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.9	*Gain	
	*Test Method	
	*Per document from 5.7 (doc des)	1757
	*Applied inputs (columns 3, 4, 6 and 7)	Table I
	Bandwidth operation (select one)	
	Broad	1758
	Narrow	1759
	Low temperature at maximum dB down	
	Between (-deg C)	1760
	and (-deg C)	1761
	*Requirements	
	*Gain (columns 9 and 10, or 13, or 14).	Table I
	Maximum voltage gain difference of two channels (pct)	1762
	Maximum decibels down when operated at low temperature (dB)	1763
	Maximum variation of gain flatness ± (dB)	1764

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.10	*Power	
	*Test Method (Select one)	
	Per document from 5.7 (doc des)	1836
	*Applied inputs (columns 4, 5, 7 and 8)	Table II
	Maximum over-drive level peak envelope power (W)	1837
	*Requirements (Select one	
	As follows:	
	*Responses (columns 11 and 12)	Table II
	No damage to the circuits in the amplifier from over-drive.	1838
	Maximum level into 50 ohms load (Select one)	
	(W)	1839
	(V rms)	1840
	(dBm)	1841

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.10 (Cont)	*Requirements (Select one) (Cont)	
	No damage by overvoltage due to short circuit of the power source resistances.	1842
	Satisfactory operation with input voltages shown in Table II.	1843
	Satisfactory operation with input frequencies shown in Table II.	1844
	Minimum at 1 dB gain compression (dBm)	1577
	Minimum harmonic level (-dB)	1578
	Minimum intermodulation, 2nd and 3rd order (dB)	1579
5.11	Design Characteristics	
5.11.1	*Frequency	
	Range	
	*Lower limit (select one)	
	(Hz)	1563
	(kHz)	1564
	(MHz)	1565

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.11.1 (Cont)	Range (Cont)	
	*Upper limit (select one)	
	(Hz)	1566
	(kHz)	1567
	(MHz)	1568
	IF amplifier	
	*Center (select one)	
	(Hz)	1569
	(kHz)	1570
	(MHz)	1571
	3 dB gain drop frequency (MHz)	1572
5.11.2	Supply Power	
	Voltage	
	(dc)	1573
	(ac)	1591
	*(Hz)	1592

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.11.2 (Cont)	Voltage (Cont)	
	Regulation ± (pct)	1593
	Circuit (select one)	
	(mA)	1574
	(A)	1575
	Maximum CW input (dBm)	1576
5.11.3	Phase Linearity	
	± (deg)	1580
	*(MHz)	1581
5.11.4	Reverse Isolation	
	Minimum (dB)	1582
5.11.5	Intercept Point	
	(dBm)	1583
5.11.6	Schematic Number (entire number)	1584
5.11.7	Class Operation (letter(s)	1585
5.11.8	Connectors	Table III

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.11.9	Weight, Maximum	
	U.S. system of measurements (select one)	
	(oz)	1586
	(lb)	1587
	SI system of measurements (select one)	
	(9)	1588
	(kg)	1589
5.11.10	Number of fins required (quantity)	1590
5.11.11	Altitude Range	
	Operating condition	
	Sea level to	
	(ft)	5060
	(m)	5061
	Nonoperating condition	
	Sea level to	
	(ft)	5062
	(m)	5063

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.11.12	Temperature	
	Operating	
	Minimum (deg C)	5068
	Maximum (deg C)	5069
	Nonoperating	
	Minimum (deg C)	5070
	Maximum (deg C)	5071
5.11.13	Mounting Hardware (See Table T of MIL-STD-35)	
	Furnished not mounted.	6947
	Furnished mounted.	6948
5.12	Acceleration	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	6249
	Per 1006 document except (see 5.4) ____	6250
	Per MIL-STD-202, Method 212.	6251

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.12 (Cont)	Acceleration (Cont)	
	Per MIL-STD-202, Method 212. (Cont)	
	Test condition letter (select one)	
	Test condition letter A	
	Level (select one)	
	20 g.	4863
	50 g.	4864
	100 g.	4865
	Test condition letter B	
	Level (select one)	
	10,000 g.	4868
	20,000 g.	4892
	One direction.	1557
	Both directions.	1558
	Mount by any suitable method.	6263
	Mount by normal method.	6264
	Mount per document from 5.7 (doc des)	6265

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.12 (Cont)	Acceleration (Cont)	
	Test condition letter (select one) (Cont]	
	Test condition letter C	
	Level (g)	4893
	Test per MIL-A-8026.	1600
	(g)	1601
	*Duration (min.)	1602
	*Requirements (select one)	
	Per 1006 document (see 5.4).	6271
	Per 1006 document except (see 5.4) ___	6272
	As follows:	
	*No evidence of physical damage.	6273
	Remain within specified tolerance.	6277
	No discontinuity.	7345
	Design performance requirements	
	Gain.	2000
	Power.	2001
	Bandwidth and Center Frequency.	2002

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.12 (Cont)	Acceleration (Cont)	
	Design performance requirements (Cont)	
	Fidelity.	2003
	Frequency Response.	2004
	Impedance.	2005
	Linearity.	2006
	Pulse Response.	2007
	Spurious Outputs.	2008
	Stability.	2009
5.13	Altitude (Low Pressure)	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	1605
	Per 1006 document except (see 5.4) ____	1606
	Per MIL-STD-810, Method 500.	1607
	Duration of operation and measurements (hr)	1608

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.13 (Cont)	Altitude (Low Pressure) (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1609
	Per 1006 document except (see 5.4) ____	1610
	As follows:	
	Design performance requirements	
	Gain.	2010
	Power.	2011
	Bandwidth and Center Frequency.	2012
	Fidelity.	2013
	Frequency Response.	2014
	Impedance.	2015
	Linearity.	2016
	Pulse Response.	2017
	Spurious Outputs.	2018
	Stability.	2019
	Remain within specified tolerance.	1612
	No discontinuity during test.	1613

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.14	Bandwidth and Center Frequency	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	1615
	Per 1006 document except (see 5.4) ____	1616
	Per document from 5.7 (dot ales)	1617
	Gain control voltage (Vdc)	1618
	Signal generator frequency.	
	*From (MHz)	1619
	*To (MHz)	1620
	dB down from maximum response.	
	Bandwidth (dB)	1621
	Narrow bandwidth (dB)	1622
	Broad bandwidth (dB)	1623
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1624
	Per 1006 document except (see 5.4) ____	1625

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.14 (Cont)	Bandwidth and Center Frequency (Cont)	
	*Requirements (Select one) (Cont)	
	As follows:	
	Bandwidth.	
	*From (MHz)	1626
	*To (MHz)	1627
	Broad bandwidth.	
	*From (MHz)	1628
	*To (MHz)	1629
	Overall selectivity curve flatness.	
	Within ± (dB)	1630
	Narrow bandwidth.	
	*From (MHz)	1631
	*To (MHz)	1632
	Overall selectivity curve flatness.	
	Within ± (dB)	1633

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.14 (Cont)	*Requirements (Select one) (Cont)	
	Center frequency.	
	(MHz)	1634
	*± (MHz)	1635
5.15	Dielectric Withstanding Voltage at Reduced Barometric Pressure	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	4883
	Per 1006 document except (see 5.4) ____	4884
	Per MIL-STD-202, Method 301.	6300
	*Altitude per Method 105 of MIL-STD-202	
	*Test condition (letter)	4886
	*Test voltage (select one)	
	(Vdc)	4885
	(Vac)	4849
	Point of voltage application	
	Between terminations tied together and mounting hardware.	6311
	Between terminations tied together and case.	6312

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.15	Point of voltage application (Cont)	
	Special preparation in accordance with document from 5.7 (doc des)	4859
	Mounting shall be in accordance with document from 5.7 (doc des)	6280
	Duration of voltage application (s)	4891
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	4907
	Per 1006 document except (see 5.4) ____	4908
	As follows:	
	*No evidence of flashover, mechanical damage, arcing, or insulation breakdown.	4906
	Maximum leakage (mA)	4894
	Remain within specified tolerance.	4901
5.16	Dielectric Withstanding Voltage at Sea Level	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	4860
	Per 1006 document except (see 5.4) _____	4861

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.16 (Cont)	*Test Methods (Select one) (Cont)	
	Test per MIL-STD-202, Method 301.	4862
	*Test voltage (select one)	
	(Vdc)	4854
	(Vac)	4855
	Points of voltage application.	
	Between terminations tied together and mounting hardware.	4842
	Between terminations tied together and case.	4848
	Special preparation in accordance with document from 5.7 (dot ales)	4850
	Duration of voltage application(s) if other than 60.	4867
	Mounting in accordance with document from 5.7 (dot ales)	5000
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	4873
	Per 1006 document except (see 5.4) ____	4874

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.16 (Cont)	*Requirements (Select one) (Cont)	
	Requirement(s) as follows:	
	*No evidence of flashover, mechanical damage, arcing, or insulation breakdown.	4856
	Maximum leakage (mA)	4875
	Remain within specified tolerance.	4847
5.17	Electromagnetic Interference	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	1862
	Per 1006 document except (see 5.4) ___	1863
	As follows:	
	MIL-STD-461, Appendix Method (des)	1864
	MIL-STD-462	
	*Test method	
	CE (no.)	1865
	RE (no.)	1866
	CS (no.)	1867
	RS (no.)	1868
	CRE (no.)	1869

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.17 (Cont)	Electromagnetic Interference (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1870
	Per 1006 document except (see 5.4) ____	1871
	Per MIL-STD-461 limits.	1872
5.18	Endurance	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	1713
	Per 1006 document except (see 5.4) ____	1714
	Per document from 5.7 (dot ales)	1715
	Operational cycle duration.	
	Power applied (hr)	1716
	Power turned off (hr)	1717
	Operational cycles (quantity)	1718

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.18 (Cont)	Endurance (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1719
	Per 1006 document except (see 5.4) _____	1720
	As follows:	
	Design performance requirements.	
	Gain.	2020
	Power.	2021
	Bandwidth and Center Frequency.	2022
	Fidelity.	2023
	Frequency Response.	2024
	Impedance.	2025
	Linearity.	2026
	Pulse Response.	2027
	Spurious Outputs.	2028
	Stability.	2029
	Remain within specified tolerance.	1722
	No discontinuity during test.	1723

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.19	Fidelity	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	1728
	Per 1006 document except (see 5.4) ____	1729
	Per document from 5.7 (doc des)	1730
	Transmitter operating mode (select one)	
	Normal .	1731
	Retransmission.	1732
	Broadband.	1733
	Minimum transmitter carrier modulation (pct)	1734
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1735
	Per 1006 document except _____	1736
	As follows:	
	Maximum deviation of amplifier fidelity from driver fidelity.	
	(± dB)	1737
	*From (Hz)	1738
	*To (Hz)	1739

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.20	Frequency Response	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	1741
	Per 1006 document except (see 5.4) ____	1742
	Per document from 5.7 (doc des)	1743
	Test inputs per Table IV.	1744
	*Enter Code 1744 with an "X" and applicable codes from Table IV and values.	
	Signal output level adjustment	
	*Nominal source voltage set at (Vdc)	1745
	Frequency test band type (select one)	
	Pass.	1746
	Reject.	1747
	Reference level (O dB)	
	(W)	1748
	(Hz)	1749
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1750
	Per 1006 document except (see 5.4) ____	1751

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.20 (Cont)	Frequency Response (Cont)	
	Requirement(s) as follows:	
	Responses per Table IV.	1752
	*Enter Code 1752 with an "X" and applicable codes from Table and values.	
	The response curve shall be free of peaks and dips between test frequencies.	1753
5.21	Fungus	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	4753
	Per 1006 document except (see 5.4) ____	4754
	Per MIL-STD-810, Method 508.	4755
	Test period if other than 28 (days).	4756
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	4759
	Per 1006 document except (see 5.4) ____	4760
	As follows:	
	Fungus resistant by certification or by test.	4761
	No evidence of fungus growth when tested.	4762

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.22	High Temperature	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	6216
	Per 1006 document except (see 5.4) ____	6217
	Per MIL-STD-810, Method 501.	6218
	*Procedure (Roman numeral)	6219
	Storage temperature if other than 71 (deg C)	6220
	Storage duration if other than 48 (hrs)	6221
	Highest operating temperature (deg C)	6222
	Operation time (select one)	
	(min)	6224
	(hr)	6225
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	6227
	Per 1006 document except (see 5.4) ____	6228
	As follows:	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.22 (Cont)	*Requirements (Select one) (Cont)	
	*No evidence of physical damage.	6229
	Design performance requirements.	
	Gain.	2030
	Power.	2031
	Bandwidth and Center Frequency.	2032
	Fidelity.	2033
	Frequency Response.	2034
	Impedance.	2035
	Linearity.	2036
	Pulse Response.	2037
	Spurious Outputs.	2038
	Stability.	2039

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.23	Humidity	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	4787
	Per 1006 document except (see 5.4) ____	4788
	Per MIL-STD-202, Method 103.	4853
	*Test condition (letter)	4890
	Perform dielectric withstanding voltage test at high humidity.	6207
	Perform dielectric withstanding voltage test after drying.	6206
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	4797
	Per 1006 document except (see 5.4) ____	4798
	As follows:	
	*No evidence of corrosion or physical damage.	4799
	Remain within specified tolerance.	4791
	No evidence of arcing, flashover, or insulation breakdown when DWV applied.	1477

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.23 (Cont)	*Requirement(s) (Select one) (Cont)	
	Minimum insulation resistance at high humidity (megohms)	4795
	Minimum insulation resistance after drying (megohms)	4805
	Maximum leakage at high humidity (mA)	4813
	Maximum leakage after drying (mA)	4803
	Design performance requirements.	
	Gain.	2040
	Power.	2041
	Bandwidth and Center Frequency.	2042
	Fidelity.	2043
	Frequency Response.	2044
	Impedance.	2045
	Linearity.	2046
	Pulse Response.	2047
	Spurious Outputs.	2048
	Stability.	2049

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.24	Immersion	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	4808
	Per 1006 document except (see 5.4) ____	4809
	Per MIL-STD-202, Method 104.	4810
	*Test condition (letter).	4811
	Measurements after final cycle if other than 24 within (hr)	4812
	Time before measurements after final cycle if other than 4 (hr)	4814
	*Requirements (Select one)	
	Per 1006 document (see 5.4)	4818
	Per 1006 document except (see 5.4) _____	4819
	As follows:	
	*No evidence of physical damage.	4820
	Remain within specified tolerance.	4822
	Minimum insulation resistance (megohms)	4825

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.24 (Cont)	*Requirements (Select one) (Cont)	
	Design performance requirements.	
	Gain.	2050
	Power.	2051
	Bandwidth and Center Frequency.	2052
	Fidelity.	2053
	Frequency Response.	2054
	Impedance.	2055
	Linearity.	2056
	Pulse Response.	2057
	Spurious Outputs.	2058
	Stability.	2059
5.25	Impedance	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	1798
	Per 1006 document except (see 5.4) ____	1799
	Per document from 5.7 (doc des)	1800

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.25 (Cont)	*Test Methods (Select one) (Cont)	
	Test inputs per Table V.	1797
	*Enter Code 1797 with an "X" and applicable codes from Table and values.	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1801
	Per 1006 document except (see 5.4) ____	1802
	As follows:	
	Impedance and VSWR per Table V.	1803
	*Enter Code 1803 with an "X" and applicable codes from Table and values.	
5.26	Insulation Resistance	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	1370
	Per 1006 document except (see 5.4) ____	1371
	Per MIL-STD-202, Method 302.	1511

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.26 (Cont)	Insulation Resistance (Cont)	
	*Test Methods (Select one) (Cont)	
	*Condition (select one)	
	Test condition (letter).	1378
	Test voltage (Vdc)	1373
	Electrification time if other than 2 minutes (s)	1376
	Maximum measurement error at required value if other than 10 (pct)	1377
	Points of application of test voltage.	
	Between terminations tied together and mounting hardware.	1497
	Between terminations tied together and case.	1498
	Special preparations or conditions per document from 5.7 (doc des)	1520
	First test temperature (deg C)	1372
	Second test temperature (deg C)	1381
	Temperature tolerance (deg C)	1383

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.26 (Cont)	Insulation Resistance (Cont)	
	*Requirements (select one)	
	Per 1006 document (see 5.4).	1379
	Per 1006 document except (see 5.4) ____	1380
	As follows:	
	*No evidence of physical damage.	1407
	Minimum insulation resistance (select one)	
	Single test	
	(megohms)	1386
	Multiple test	
	First test (megohms)	1334
	Second test (megohms)	1387
	Remain within specified tolerance.	1388
5.27	Linearity	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	1805
	Per 1006 document except (see 5.4) ____	1806

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.27 (Cont)	Linearity (Cont)	
	*Test Methods (Select one (Cont)	
	Per document from 5.7 (doc des)	1807
	Test inputs per Table VI	1808
	*Enter Code 1808 with an "X" and applicable codes from Table and values.	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1809
	Per 1006 document except (see 5.4) ____	1810
	As follows:	
	Responses per Table VI.	1811
	*Enter Code 1811 with an "X" and applicable codes from Table and values.	
5.28	Low Temperature	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	6230
	Per 1006 document except (see 5.4) ____	6231

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.28 (Cont)	Low Temperature (Cont)	
	*Test Methods (Select one) (Cont)	
	Per MIL-STD-810, Method 502.	6232
	Storage temperature if other than -57 (deg C)	6234
	Storage duration if other than 24 (hr)	6235
	Lowest operating temperature (deg C)	6236
	Chamber air velocity.	
	(ft/s)	6237
	(m/s)	6238
	Operating time (Select one)	
	(min)	6315
	(hr)	6316
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	6317
	Per 1006 document except (see 5.4) ____	6318

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.28 (Cont)	Low Temperature (Cont)	
	*Requirements (Select one) (Cont)	
	As follows:	
	*No evidence of physical damage.	6319
	Design performance requirements.	
	Gain.	2060
	Power.	2061
	Bandwidth and Center Frequency.	2062
	Fidelity.	2063
	Frequency Response.	2064
	Impedance.	2065
	Linearity.	2066
	Pulse Response.	2067
	Spurious Outputs.	2068
	Stability.	2069

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.28 (Cont)	*Requirements (Select one) (Cont)	
	Impedance.	2065
	Linearity.	2066
	Pulse Response.	2067
	Spurious Outputs.	2068
	Stability.	2069
5.29	Moisture Resistance	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	1390
	Per 1006 document except (see 5.4) ____	1391
	Per MIL-STD-202, Method 106.	1397
	Polarizing voltage if other than 100 (Vdc)	1395
	Loading voltage (select one)	
	(Vdc)	4981
	(Vac)	4980

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.29	Moisture Resistance	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	1390
	Per 1006 document except (see 5.4) ____	1391
	Per MIL-STD-202, Method 106.	1397
	Loading voltage (select one)	
	(Vdc)	4981
	(Vac)	4980
	Step 7a not applicable.	4985
	Step 7b not applicable.	4986
	Mount in accordance with document from 5.7 (doc des)	1449
	Perform dielectric withstanding voltage test at high humidity.	4983
	Perform dielectric withstanding voltage test after drying.	4984
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1399
	Per 1006 document except (see 5.4) ____	1400

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.29 (Cont)	Moisture Resistance (Cont)	
	*Requirements (Select one) (Cont)	
	As follows:	
	*No evidence of corrosion or physical damage.	1396
	Remain within specified tolerance.	1398
	No evidence of arcing, flashover, or insulation breakdown when DWV applied.	1394
	Minimum insulation resistance at high humidity (megohms)	1432
	Minimum insulation resistance after drying (megohms)	1406
	Maximum leakage at high humidity (mA)	1429
	Maximum leakage after drying (mA)	1404
	Design performance requirements.	
	Gain.	2070
	Power.	2071
	Bandwidth and Center Frequency.	2072
	Fidelity.	2073
	Frequency Response.	2074
	Impedance.	2075

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.29 (Cont)	Design performance requirements. (Cont)	
	Linearity.	2076
	Pulse Response.	2077
	Spurious Outputs.	2078
	Stability.	2079
5.30	Pulse Response	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	1849
	Per 1006 document except (see 5.4) _____	1850
	Per document from 5.7 (doc des)	1851
	Test inputs per Table VII.	1852
	*Enter Code 1852 with an "X" and applicable codes from Table and values.	
	Number of pulses in train (quantity)	1853
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1854
	Per 1006 document except (see 5.4) _____	1855

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.30	*Requirements (Select one) (Cont)	
	As follows:	
	Responses per Table VII.	
	*Enter Code 1860 with an "X" and applicable codes from Table VII and values.	1860
	Pulse characteristics.	Table VII
	Decay time.	
	Rise time difference (between input and output pulses).	
	Minimum duration.	
	Rise time.	
	Spacing.	
	Width.	
	Maximum pulse train droop (pct)	1856
	Maximum amplitude difference of two pulses (V)	1857
	Minimum alternate amplifier output energy (ergs)	1858
	*Within length of time after triggering (micro s)	1859

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.31	Salt Spray	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	4769
	Per 1006 document except (see 5.4) ____	4770
	Per MIL-STD-202, Method 101.	4771
	*Test condition (letter)	4772
	Special mounting shall be per (document no., 5.7)	4773
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	4877
	Per 1006 document except (see 5.4) ____	4878
	As follows:	
	*No evidence of corrosion.	4782
	Remain within specified tolerance.	4785
	Design performance requirements.	
	Gain.	2080
	Power.	2081
	Bandwidth and Center Frequency.	2082

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.31 (Cont)	*Requirements (Select one) (Cont)	
	Fidelity.	2083
	Frequency Response.	2084
	Impedance.	2085
	Linearity.	2086
	Pulse Response.	2087
	Spurious Outputs.	2088
	Stability.	2089
5.32	Sand and Dust	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	4951
	Per 1006 document except (see 5.4) ____	4952
	Per MIL-STD-202, Method 110.	4960
	Test specimen(s) shall be:	
	Operating during test step (no.)	4872
	*Duration of operation (hr)	6299
	Specimen orientation shall be changed during test.	1539

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.32 (Cont)	*Test Methods (Select one) (Cont)	
	Second 6-hour test at 63 degrees C required immediately following stabilization in step 2.	4956
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	4957
	Per 1006 document except (see 5.4) ____	4958
	As follows:	
	*No evidence of dust penetration.	4959
	Remain within specified tolerance.	4954
	Design performance requirements.	
	Gain.	2090
	Power.	2091
	Bandwidth and Center Frequency.	2092
	Fidelity.	2093
	Frequency Response.	2094
	Impedance.	2095
	Linearity.	2096
	Pulse Response.	2097

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.32	*Requirements (Select one) (Cont)	
	Spurious Outputs.	2098
	Stability.	2099
5.33	Shock	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	7310
	Per 1006 document except (see 5.4) ____	7311
	Per MIL-STD-810, Method 516.	7312
	*Procedure (select one)	
	Procedure I, (I)	7313
	*Figure (select one)	
	Figure 516-1 applies.	7317
	Figure 516-2 applies.	7318
	*Amplitude (A or B) (letter)	7305
	*Duration (C or D) (letter)	7306
	procedure II, (II)	6327
	Procedure III, (III)	6338
	*Figure (select one)	
	Figure 516-1 applies.	6339
	Figure 516-2 applies.	6340

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.33 (Cont)	Procedure III, (III) (Cont)	
	*Amplitude (A or B) (letter)	6341
	*Duration (C or D) (letter)	6342
	Procedure IV, (IV)	
	*Figure (select one)	6343
	Figure 516-1 applies.	6344
	Figure 516-2 applies.	6345
	*Amplitude (A or B) (letter)	6346
	*Duration (C or D) (letter)	6347
	Procedure V (V)	6348
	Procedure VI (VI)	6349
	Test temperature if other than ambient (deg C)	7307
	Temperature tolerance (deg C)	7308
	Operation during test required.	7309
	Percent rated load applied (pct)	6204

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.33	Shock	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	7314
	Per 1006 document except (see 5.4) _____	7315
	As follows:	
	*No evidence of physical damage.	7316
	Remain within specified tolerance.	4703
	Design performance requirements.	
	Gain.	2100
	Power.	2101
	Bandwidth and Center Frequency.	2102
	Fidelity.	2103
	Frequency Response.	2104
	Impedance.	2105
	Linearity.	2106
	Pulse Response.	2107
	Spurious Outputs.	2108
	Stability.	2109

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.34	Shock, High Impact	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	1485
	Per 1006 document except (see 5.4) ____	1486
	Per MIL-STD-202, Method 207.	1482
	*Mounting fixture (select one)	
	Fixture number from Method 207 of MIL-STD-202 (no.)	1488
	Any suitable mounting fixture.	1478
	Mounting fixture in accordance with document from 5.7 (doc des)	1468
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1493
	Per 1006 document except (see 5.4) _____	1494
	As follows:	
	*No evidence of physical damage.	1495
	Remain within specified tolerance.	1464
	No discontinuity during test.	1451

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.34 (Cont)	*Requirements (Select one) (Cont)	
	Design performance requirements.	
	Gain.	2110
	Power.	2111
	Bandwidth and Center Frequency.	2112
	Fidelity.	2113
	Frequency Response.	2114
	Impedance.	2115
	Linearity.	2116
	Pulse Response.	2117
	Spurious Outputs.	2118
	Stability.	2119
5.35	Spurious Outputs	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	1905
	Per 1006 document except (see 5.4) ____	1906
	Per document from 5.7 (doc des)	1907

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.35 (Cont)	*Test Methods (Select one) (Cont)	
	Test inputs per Table VII.	1908
	*Enter Code 1908 with an "X" and applicable codes from Table and values.	
	Hum level conditions	Table VIII
	Distortion	
	Tone control, voltage inputs, frequencies, loads	Table VIII
	RF modulation measurement level (pct)	1910
	Noise	
	Voltage input levels	Table VIII
	Signal to noise ratio	
	AF output (W)	1912
	AF input	
	(mW)	1913
	(Vac)	1914
	*(KHz)	1915

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.35 (Cont)	Spurious Outputs (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1916
	Per 1006 document except (see 5.4) _____	1917
	As follows:	
	Response per Table VIII.	
	*Enter Code 1918 with an "X" and applicable codes from Table and values.	1918
	Hum level limits.	Table VIII
	Distortion limits.	Table VIII
	Minimum third order intermodulation (dB)	1919
	Maximum envelope distortion (pct)	1920
	*Modulation level (pct)	1921
	Sine wave with no spurious oscillations with partial clipping acceptable.	1922

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.35 (Cont)	*Requirements (Select one) (Cont)	
	Nonharmonic outputs.	
	Minimum (dB) down from desired output signal level.	1923
	Harmonically related signals.	
	Minimum attenuation (dB)	1924
	Noise limits.	Table VIII
	Bipolar.	
	Avg. peak to peak amplitude.	
	(Vp-p)	1925
	*± (Vp-p)	1926
	Output (Micro A)	1927
	Maximum amplitude (pct)	1928
	*As output varies ±(microA)	1929
	Minimum value of hum and noise output (dB) below output level of modulating tones.	1930
	Minimum signal to noise ratio (dB)	1931

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.36	Stability	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	1940
	Per 1006 document except (see 5.4) ____	1941
	Per document from 5.7 (doc des)	1942
	Applied voltage.	
	(Vdc)	1943
	(Vac)	1944
	*(Hz)	1945
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1946
	Per 1006 document except (see 5.4) ____	1947
	As follows:	
	No drift in gain or spurious oscillations.	1948
	No evidence of regeneration.	1949
	No damage and evidence of instability with input terminated in either open or short circuits.	1950
	No damage and evidence of instability with output terminated in either open or short circuits.	1951

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.36 (Cont)	*Requirements (Select one) (Cont)	
	Maximum output voltage variation (Select one)	
	± (Vdc)	1952
	± (Vac)	1953
	No flattening at top of applied sine wave or indication of oscillations.	1954
5.37	Temperature, Altitude	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	1956
	Per 1006 document except (see 5.4) ____	1957
	Per MIL-STD-810, Method 504.	1958
	Duration of operation and measurements (hr)	1959
	Equipment category (no.)	1960

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.37 (Cont)	Temperature, Altitude (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1961
	Per 1006 document except (see 5.4) ____	1962
	As follows:	
	Design performance requirements.	
	Gain.	2130
	Power.	2131
	Bandwidth and Center Frequency.	2132
	Fidelity.	2133
	Frequency Response.	2134
	Impedance.	2135
	Linearity.	2136
	Pulse Response.	2137

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.37 (Cont)	*Requirements (Select one) (Cont)	
	Spurious Outputs.	2138
	Stability.	2139
	No evidence of physical damage.	1964
	Remain within specified tolerance.	1965
	No discontinuity during test.	1966
	Thermal Shock	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	4712
	Per 1006 document except (see 5.4)	4713
	Per MIL-STD-202, Method 107.	4714
	*Test condition (letter)	4715
	Mounting shall be in accordance with document from 5.7 (dot ales)	4719
	Per MIL-E-16400.	1968
	*Class (no.)	1969

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.38 (Cont)	Thermal Shock (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	4720
	Per 1006 document except (see 5.4) ____	4722
	As follows:	
	*No evidence of physical damage.	4723
	Remain within specified tolerance.	4726
	Design performance requirements.	
	Gain.	2140
	Power.	2141
	Bandwidth and Center Frequency.	2142
	Fidelity.	2143
	Frequency Response.	2144
	Impedance.	2145
	Linearity.	2146
	Pulse Response.	2147
	Spurious Outputs.	2148
	Stability.	2149

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.39	Vibration, High Frequency	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	1445
	Per 1006 document (see 5.4) _____	1446
	Per MIL-STD-202, Method 204.	1447
	*Test condition (letter)	1448
	Method of mounting (select one)	
	Any suitable mounting method.	4709
	Normal means.	4708
	Mount in accordance with document from 5.7 (doc des)	4707
	Method of determining mechanical resonance (select one)	
	Visually by means of a strobotac.	1533
	Electrical output indicators.	1534
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1454
	Per 1006 document (see 5.4) _____	1455

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.39 (Cont)	Vibration, High Frequency (Cont)	
	*Requirements (Select one) (Cont)	
	As follows:	
	*No evidence of physical damage.	1456
	No discontinuity during test.	1473
	Remain within specified tolerance.	1469
	Design performance requirements.	
	Gain.	2150
	Power.	2151
	Bandwidth and Center Frequency.	2152
	Fidelity.	2153
	Frequency Response.	2154
	Impedance.	2155
	Linearity.	2156
	Pulse Response.	2157
	Spurious Outputs.	2158
	Stability.	2159

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.40	Vibration, Low Frequency	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	1465
	Per 1006 document except. (see 5.4) ____	1466
	Per MIL-STD-202, Method 201.	1467
	Duration of vibration per axis if other than 2 hours (hr)	1470
	Method of mounting (select one)	
	Any suitable mounting method.	4731
	Normal mounting means.	4730
	Mount in accordance with document from 5.7 (doc des)	4729
	Direction of motion	
	Parallel to longitudinal axis.	1535
	Perpendicular to longitudinal axis.	1536
	Three mutually perpendicular axes.	1537

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.40 (Cont)	Vibration, Low Frequency (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1474
	Per 1006 document except (see 5.4) ____	1475
	As follows:	
	*No evidence of physical damage.	1476
	Remain within specified tolerance.	1480
	No discontinuity during test.	1490
	Design performance requirements.	
	Gain.	2160
	Power.	2161
	Bandwidth and Center Frequency.	2162
	Fidelity.	2163
	Frequency Response.	2164
	Impedance.	2165
	Linearity.	2166
	Pulse Response.	2167
	Spurious Outputs.	2168
	Stability.	2169

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.41	Vibration, Random	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	1425
	Per 1006 document except (see 5.4) ____	1426
	Per MIL-STD-202, Method 214.	1427
	*Test condition (number and letter).	1428
	*Duration of application (select one)	
	(min)	1438
	(hr)	1431
	Monitoring instrumentation of excitation (select one)	
	Any suitable system.	1452
	Calibrated ac to dc converter and strip chart recorder.	1453
	Calibrated oscilloscope.	1459
	Number of vibration monitoring test points (quantity)	1430
	Location of monitoring points (select one)	
	Any suitable location.	1439

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.41 (Cont)	*Test Methods (Cont)	
	As close as practical to test specimen.	1462
	Method of mounting (select one)	
	Any suitable mounting method.	4977
	Normal mounting method.	4976
	Mount in accordance with document from 5.7 (doc des)	4975
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1434
	Per 1006 document except (see 5.4) _____	1435
	As follows:	
	*No evidence of physical damage.	1436
	Remain within specified tolerance.	1538
	No discontinuity during test.	1374
	Design performance requirements.	
	Gain.	2170
	Power.	2171
	Bandwidth and Center Frequency.	2172

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.41 (Cont)	*Requirements (Select one) (Cont)	
	Fidelity.	2173
	Frequency Response.	2174
	Impdance.	2175
	Linearity.	2176
	Pulse Response.	2177
	Spurious Outputs.	2178
	Stability.	2179

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 6

USE OF AEDPS

6.1 Procedure

The step by step procedure contained in MIL-STD-35 is applicable to Amplifiers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 7

FIGURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

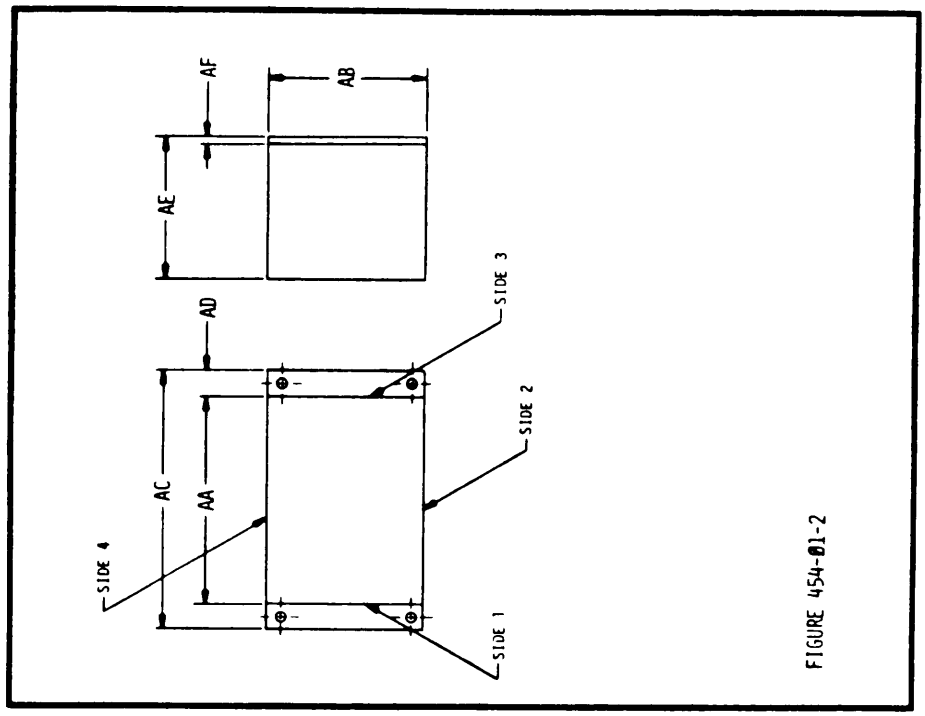


FIGURE 454-01-2

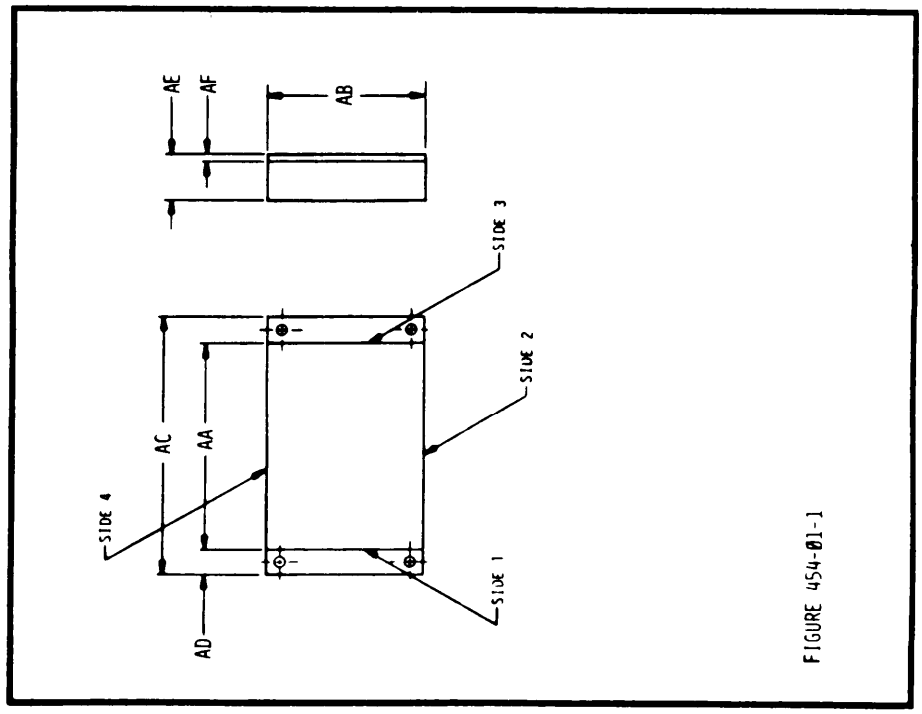


FIGURE 454-01-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

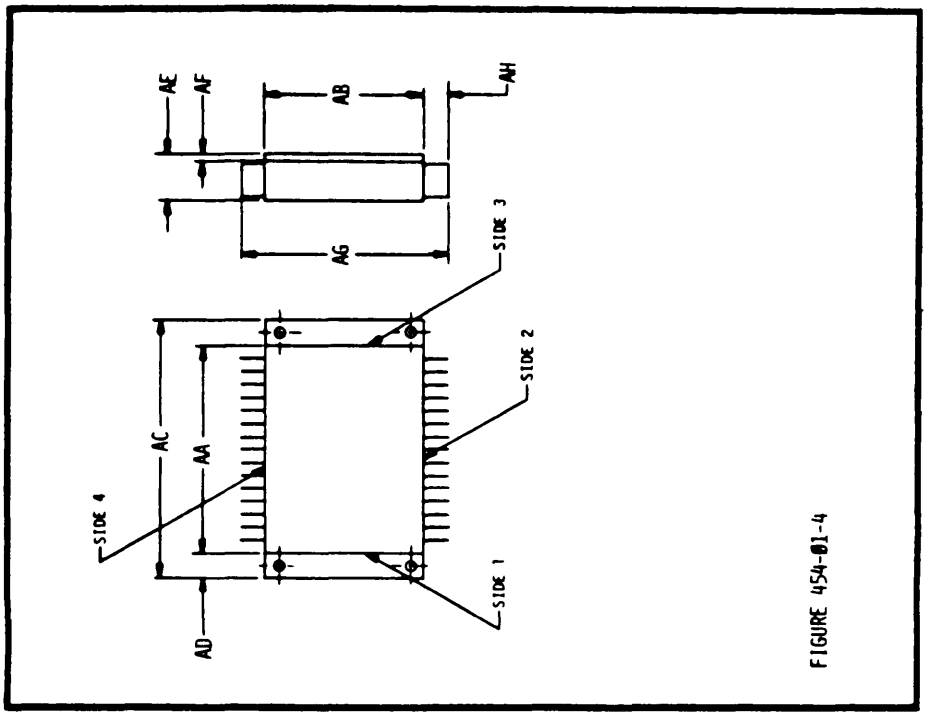


FIGURE 454-01-4

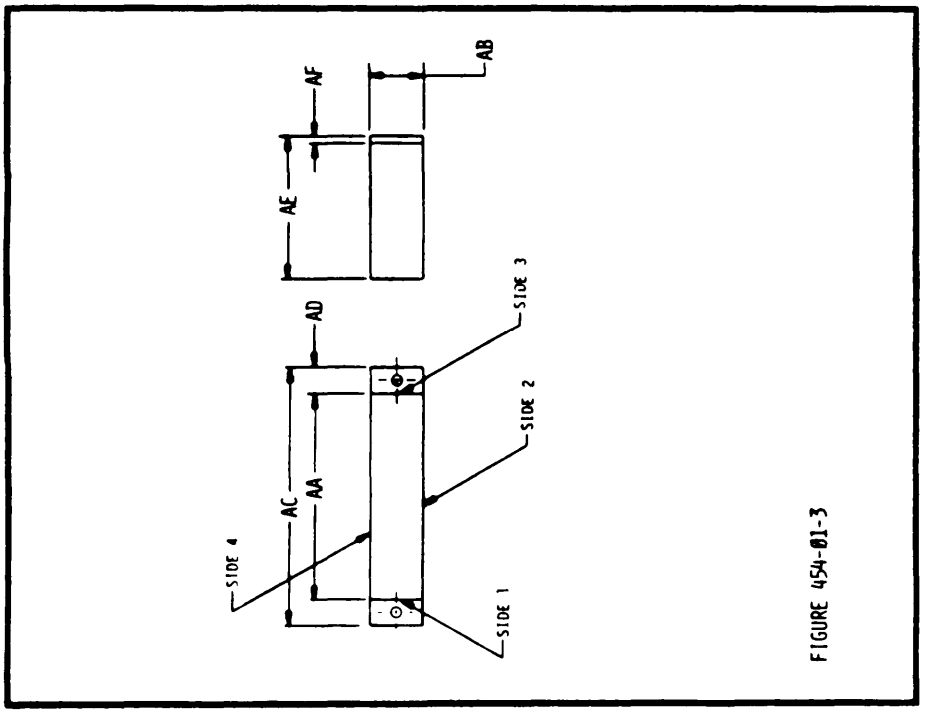


FIGURE 454-01-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

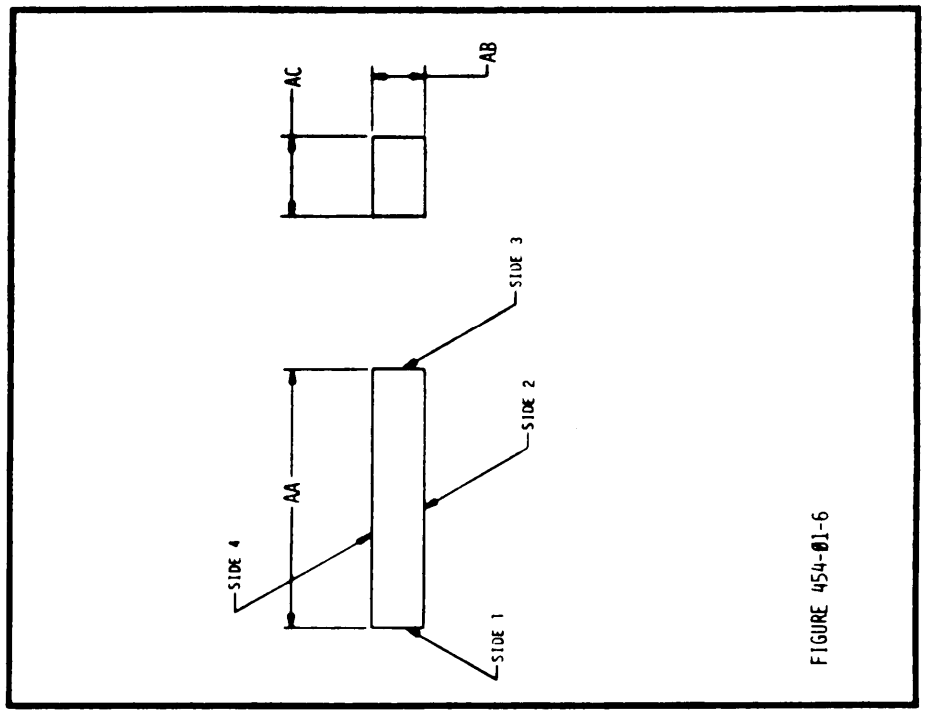


FIGURE 454-01-6

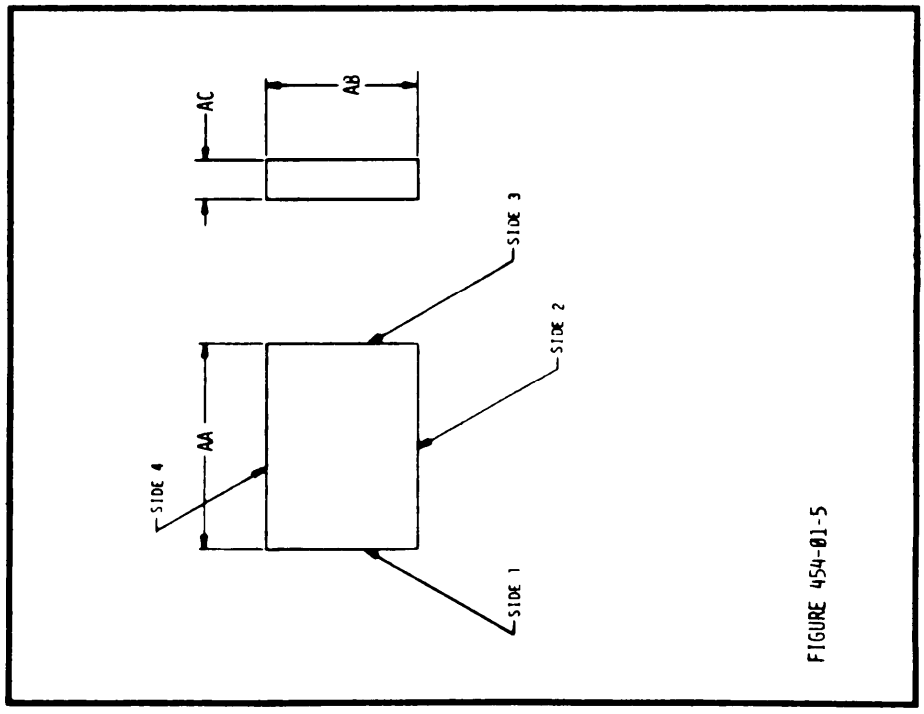


FIGURE 454-01-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

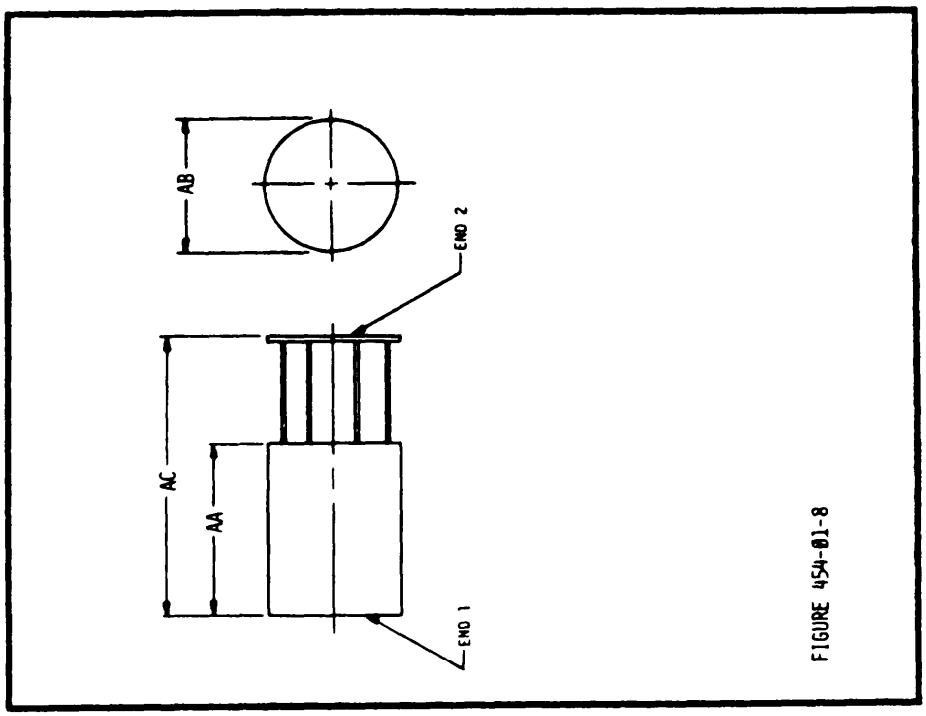


FIGURE 454-01-8

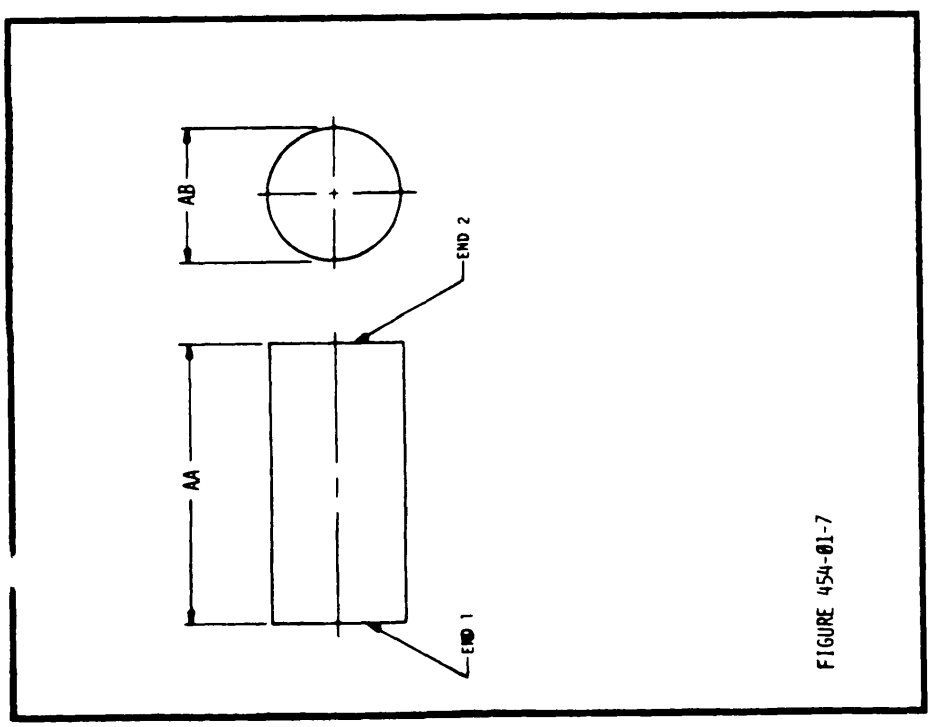


FIGURE 454-01-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 8

TABLES

Tables contained in MIL-STD-35 are applicable to Amplifiers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. GAIN
(See 5.9)

GAIN TABLE

REF NO.	CONDITION	APPLIED SIGNAL VOLTAGE PLRT AND VAL	UNITS	PCT TOL	FREQUENCY DISCRETE VAL	UNITS	TOL + OR- (HZ)
1	2700	2701	2702	2703	2704	2705	2706
2	2707	2708	2709	2710	2711	2712	2713
3	2714	2715	2716	2717	2718	2719	2720
4	2721	2722	2723	2724	2725	2726	2727
5	2728	2729	2730	2731	2732	2733	2734
	*10	*6	*10	*4	*6	*9	*4
COL 1	2	3	4	5	6	7	8

*Number of Print characters per column (column width). Heading spans are shown by underlining.

Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective cells. Only those lines from which codes were used will print. The table will appear in Section 3 of the MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. GAIN (CONT)
(See 5.9)

GAIN TABLE (CONT)

		SIGNAL VOLTAGE		RESPONSE				
	REF NO.	PLRT AND VAL	UNITS	PCT TOL	MIN OR MAX	DB (+ OR -) MIN	MAX	STAB TIME MILLISEC
	1	2735	2736	2737	2738	2739	2740	2741
	2	2742	2743	2744	2745	2746	2747	2748
	3	2749	2750	2751	2752	2753	2754	2755
	4	2756	2757	2750	2759	2760	2761	2762
	5	2763	2764	2765	2766	2767	2768	2769
		*6	*10	*4	*3	*4	*4	*8
COL	1	9	10	11	12	13	14	15

*Number of print characters per column (column width). Heading spans are shown by underlining.

Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective cells. Only those lines from which codes were used will print. The table will appear in Section 3 of the MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE II. POWER
(See 5.10)

POWER TABLE

REF NO.	TERMINALS INP	TERMINALS OUT	SIGNAL VOLTAGE PLRT AND VAL	SIGNAL VOLTAGE UNITS	APPLIED FREQUENCY DISCRETE PCT TOL	APPLIED FREQUENCY DISCRETE VAL	APPLIED FREQUENCY DISCRETE UNITS	TOL +OR- (HZ)	LOAD OHMS
1	2990	2991	2992	2993	2994	2995	2996	2997	2998
2	2999	3000	3001	3002	3003	3004	3005	3006	3007
3	3008	3009	3010	3011	3012	3013	3014	3015	3016
4	3017	3018	3019	3020	3021	3022	3023	3024	3025
5	3026	3027	3028	3029	3030	3031	3032	3033	3034
6	3035	3036	3037	3038	3039	3040	3041	3042	3043
7	3044	3045	3046	3047	3048	3049	3050	3051	3052
8	3053	3054	3055	3056	3057	3058	3059	3060	3061
9	3062	3063	3064	3065	3066	3067	3068	3069	3070
10	3071	3072	3073	3074	3075	3076	3077	3078	3079
	*5	*5	*5	*10	*4	*6	*9	*4	*4
COL 1	2	3	4	5	6	7	8	9	10

*Number of print characters per column (column width). Heading spans are shown by underlining.

Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective cells. Only those lines from which codes were used will print, The table will appear in Section 3 of the MSE,

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE II, POWER (CONT)

(See 5.10)

POWER TABLE (CONT)

REF NO.	POWER VAL	POWER UNITS	RESPONSE OUTPUT SIGNAL VOLTAGE PLRT AND VAL	RESPONSE OUTPUT SIGNAL VOLTAGE UNITS	RESPONSE OUTPUT SIGNAL VOLTAGE PCT TOL	RESPONSE OUTPUT SIGNAL VOLTAGE MAX UNB V	RESPONSE OUTPUT SIGNAL VOLTAGE MIN OR MAX
1	3080	3081	3082	3083	3084	3085	3086
2	3088	3089	3090	3091	3092	3093	3094
3	3096	3097	3098	3099	3100	3101	3102
4	31104	3105	3106	3107	3108	3109	3110
5	3112	3113	3114	3115	3116	3117	3118
6	3120	3121	3122	3123	3124	3125	3126
7	3128	3129	3130	3131	3132	3133	3134
8	3136	3137	3138	3139	3140	3141	3142
9	3144	3145	3146	3147	3148	3149	3150
10	3152	31153	3154	3155	3156	3157	3158
	*4	*10	*5	*10	*4	*4	*3
COL 1	11	12	13	14	15	16	17

*Number of print characters per column (column width). Heading spans are shown by underlining.

Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective cells. Only those lines from which codes were used will print. The table will appear in Section 3 of the MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE III. CONNECTORS

(See 5.11.8)

CONNECTORS TABLE

	INPUT OR OUTPUT	TYPE OR SERIES	SPEC	FIGURE SIDE NO.	FIGURE END NO.	FIGURE CYL SURFACE
	3900	3901	3902	3903	3904	3905
	3906	3907	3908	3909	3910	3911
	3912	3913	3914	3915	3916	3917
	3918	3919	3920	3921	3922	3923
	3924	3925	3926	3927	3928	3929
	*6	*6	*11	*4	*4	*7
COL	1	2	3	4	5	6

*Number of print characters per column (column width). Heading spans are shown by underlining.

Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective cells. Only those lines from which codes were used will print. The table will appear in Section 3 of the MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE IV, FREQUENCY RESPONSE
(See 5.20)

FREQUENCY RESPONSE TABLE

					APPLIED TEST VOLTAGE	
REF NO.	CHANNEL	TONE CONT	VEL RNG SW POS	PLRT AND VAL	UNITS	PCT TOL
1	2500	2501	2502	2503	2504	2505
2	2506	2507	2508	2509	2510	2511
3	2512	2513	2514	2515	2516	2517
4	2518	2519	2520	2521	2522	2523
5	2524	2525	2526	2527	2528	2529
6	2530	2531	2532	2533	2534	2535
7	2536	2537	2538	2539	2540	2541
8	2542	2543	2544	2545	2546	2547
9	2548	2549	2550	2551	2552	2553
10	2554	2555	2556	2557	2558	2559
	*18	*8	*7	*6	*14	*4
COL 1	2	3	4	5	6	7

*Number of print characters per column (column width). Heading spans are shown by underlining.

Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective cells. Only those lines from which codes were used will print. Columns 1-15 will appear in Section 4 of the MSE and columns 1 and 16-20 will appear in Section 3 of the MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE IV. FREQUENCY RESPONSE (CONT)

(See 5.20)

FREQUENCY RESPONSE (CONT)

REF NO.	APPLIED FREQUENCY DISCRETE VAL	UNITS	TOL	APPLIED FREQUENCY RANGE FROM VAL	UNITS	TO VAL	UNITS
1	2560	2561	2562	2563	2564	2565	2566
2	2567	2568	2569	2570	2571	2572	2573
3	2574	2575	2576	2577	2578	2579	2580
4	2581	2582	2583	2584	2585	2586	2587
5	2588	2589	2590	2591	2592	2593	2594
6	2595	2596	2597	2598	2599	2600	2601
7	2602	2603	2604	2605	2606	2607	2608
8	2609	2610	2611	2612	2613	2614	2615
9	2616	2617	2618	2619	2620	2621	2622
10	2623	2624	2625	2626	2627	2628	2629
	*4	*9	*4	*4	*9	*4	*9
COL 1	8	9	10	11	12	13	14

*Number of print characters per column (column width). Heading spans are shown by underlining.

Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective cells. Only those lines from which codes were used will print. Columns 1-15 will appear in Section 4 of the MSE and columns 1 and 16-20 will appear in Section 3 of the MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE IV. FREQUENCY RESPONSE (CONT)

(See 5.20)

FREQUENCY RESPONSE (CONT)

		RESPONSE				
		SIGNAL VOLTAGE				
REF NO.	LOAD OHMS	PLRT AND VAL	UNITS	PCT TOL	DB (+ OR -) MIN	DB (+ OR -) MAX
1	2630	2631	2632	2633	2634	2635
2	2636	2637	2638	2639	2640	2641
3	2642	2643	2644	2645	2646	2647
4	2648	2649	2650	2651	2652	2653
5	2654	2655	2656	2657	2658	2659
6	2660	2661	2662	2663	2664	2665
7	2666	2667	2668	2669	2670	2671
8	2672	2673	2674	2675	2676	2677
9	2678	2679	2680	2681	2682	2683
10	2684	2685	2686	2687	2688	2689
	*4	*6	*10	*4	*4	*4
COL 1	15	16	17	18	19	20

*Number of print characters per column (column width). Heading spans are shown by underlining.

Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective, cells. Only those lines from which codes were used will print. Columns 1-15 will appear in Section 4 of the MSE and columns 1 and 16-20 will appear in Section 3 of the MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE V. IMPEDANCE

(See 5.25)

IMPEDANCE TABLE

REF NO.	SIGNAL VOLTAGE APPLIED: PLRT AND VAL	SIGNAL VOLTAGE APPLIED: UNITS	SIGNAL VOLTAGE APPLIED: PCT TOL	SIGNAL VOLTAGE APPLIED: VAL	FREQUENCY DISCRETE: UNITS	RESPONSE: TOL	RESPONSE: IMPD OHMS	RESPONSE: INP OR OUT	RESPONSE: MAX VSWR
1	2800	2801	2802	2803	2804	2805	2806	2807	2808
2	2809	2810	2811	2812	2813	2814	2815	2816	2817
3	2818	2819	2820	2821	2822	2823	2824	2825	2826
4	2827	2828	2829	2830	2831	2832	2833	2834	2835
5	2836	2837	2838	2839	2840	2841	2842	2843	2844
6	2845	2846	2847	2848	2849	2850	2851	2852	2853
	*6	*10	*4	*4	*9	*4	*4	*6	*4
COL	1	2	3	4	5	6	7	8	9	10

*Number of print characters per column (column width). Heading spans are shown by underlining.

Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective cells. Only those lines from which codes were used will print. Columns 1-7 will appear in Section 4 of the MSE and columns 1 and 8-10 will appear in Section 3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE VI, LINEARITY

(See 5.27)

LINEARITY TABLE

REF NO.	SIGNAL VOLTAGE APPLIED PLRT AND VAL	SIGNAL VOLTAGE APPLIED UNITS	SIGNAL VOLTAGE APPLIED PCT TOL	FREQUENCY DISCRETE VAL	FREQUENCY DISCRETE UNITS	FREQUENCY DISCRETE TOL	LOAD OHMS
1	2900	2901	2902	2903	2904	2905	2906
2	2907	2908	2909	2910	2911	2912	2913
3	2914	2915	2916	2917	2918	2919	2920
4	2921	2922	2923	2924	2925	2926	2927
5	2928	2929	2930	2931	2932	2933	2934
*4	*6	*10	*4	*4	*9	*4	*4
COL 1	2	3	4	5	6	7	8

*Number of print characters per column (column width). Heading spans are shown by underlining.

Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective cells. Only those lines from which codes were used will print. Columns 1-8 will appear in Section 4 of the MSE and columns 1 and 9-11 will appear in Section 3 of the MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE VI. LINEARITY (CONT)

(See 5.27)

LINEARITY TABLE (CONT)

REF NO.	PLRT AND VAL	RESPONSE SIGNAL VOLTAGE UNITS	PCT TOL
1	2935	2936	2937
2	2938	2939	2940
3	2941	2942	2943
4	2944	2945	2946
5	2947	2948	2949
	*6	*10	*4
COL 1	9	10	11

*Number of print characters per column (column width). Heading spans are shown by underlining.

Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective cells. Only those lines from which codes were used will print. Columns 1-8 will appear in Section 4 of the MSE and columns 1 and 9-11 will appear in Section 3 of the MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE VII. PULSE RESPONSE

(See 5.30)

PULSE RESPONSE TABLE

REF NO.	TEST NAME	V + O R -	1 or 0 LOGIC	APPLIED PULSE AMPLITUDE CURRENT MILLIAMP	APPLIED PULSE AMPLITUDE CURRENT MICROAMP	PCT TOL
1	3200	3210	3220	3230	3240	3250
2	3201	3211	3221	3231	3241	3251
3	3202	3212	3222	3232	3242	3252
4	3203	3213	3223	3233	3243	3253
5	3204	3214	3224	3234	3244	3254
6	3205	3215	3225	3235	3245	3255
7	3206	3216	3226	3236	3246	3256
8	3207	3217	3227	3237	3247	3257
9	3208	3218	3228	3238	3248	3258
10	3209	3219	3229	3239	3249	3259
	*12	*6	*5	*8	*8	*4
COL 1	2	3	4	5	6	7

*Number of print characters per column (column width). Heading spans are shown by underlining.

Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective cells. Only those lines from which codes were used will print. Columns 1-14 will appear in Section 4 of the MSE and columns 1 and 15-22 will appear in Section 3 of the MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE VII. PULSE RESPONSE (CONT)

(See 5.29)

PULSE RESPONSE TABLE (CONT)

		APPLIED PULSE						
		WIDTH			PULSE RATE FREQUENCY			
	REF NO.	MICROSEC	NANOSEC	PCT TOL	VAL	UNITS	TOL	PT OF APPL
	1	3260	3270	3280	3290	3300	3310	3320
	2	3261	3271	3281	3291	3301	3311	3321
	3	3262	3272	3282	3292	3302	3312	3322
	4	3263	3273	3283	3293	3303	33113	3323
	5	3264	3274	3284	3294	3304	3314	3324
	6	3265	3275	3285	3295	3305	33115	3325
	7	3266	3276	3286	3296	3306	3316	3326
	8	3267	3277	3287	3297	3307	3317	3327
	9	3268	3278	3288	3298	3308	3318	3328
	10	3269	3279	3289	3299	3309	3319	3329
		*8	*7	*4	*4	*9	*4	*8
COL	1	8	9	10	11	12	13	14

*Number of print characters per column (column width). Heading spans are shown by underlining.

Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective cells. Only those lines from which codes were used will print. Columns 1-14 will appear in Section 4 of the MSE and columns 1 and 15-22 will appear in Section 3 of the MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE VII. PULSE RESPONSE (CONT)

(See 5.30)

PULSE RESPONSE TABLE (CONT)

	REF NO.	PULSE CHARACT	MICRO SEC	NANO SEC	PCT TOL	RESPONSE AMPLITUDE MIN V + O R -	PCT TOL	MAX TILT PCT	PT OF RESPONSE
	1	3330	3340	3350	3360	3370	3380	3390	3400
	2	3331	3341	3351	3361	3371	3381	3391	3401
	3	3332	3342	3352	3362	3372	3382	3392	3402
	4	3333	3343	3353	3363	3373	3383	3393	3403
	5	3334	3344	3354	3364	3374	3384	3394	3404
	6	3335	3345	3355	3365	3375	3385	3395	3405
	7	3336	3346	3356	3366	3376	3386	3396	3406
	8	3337	3347	3357	3367	3377	3387	3397	3407
	9	3338	3348	3358	3368	3378	3388	3398	3408
	10	3339	3349	3359	3369	3379	3389	3399	3409
		*20	*5	*4	*4	*6	*4	*4	*8
COL	1	15	16	17	18	19	20	21	22

*Number of print characters per column (column width). Heading spans are shown by underlining.

Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective cells. Only those lines from which codes were used will print. Columns 1-14 will appear in Section 4 of the MSE and columns 1 and 15-22 will appear in Section 3 of the MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE VIII, SPURIOUS OUTPUTS

(See 5.35)

SPURIOUS OUTPUTS TABLE

REF NO.	TEST NAME	CONDITION	TONE CONT	VEL RNG Sw Pos
1	DISTORTION	3500	3501	3502
2	DISTORTION	3503	3504	3505
3	DISTORTION	3506	3507	3508
4	DISTORTION	3509	3510	3511
5	DISTORTION	3512	3513	3514
6	DISTORTION	3515	3516	3517
7	HUM	3518	3519	3520
	HUM	3521	3522	3523
	HUM	3524	3525	3526
	HUM	3527	3528	3529
	HUM	3530	3531	3532
	HUM	3533	3534	3535
	NOISE	3536	3537	3538
	NOISE	3539	3540	3541
	NOISE	3542	3543	3544
	*10	*19	*8	*7
COL 1	2	3	4	5

*Number of print characters per column (column width). Heading spans are shown by underlining.

Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective cells. Only those lines from which codes were used will print. Columns 1-16 will appear in Section 4 of the MSE and columns 1, 2 and 17-22 will appear in Section 3 of the MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE VIII, SPURIOUS OUTPUTS (CONT)

(See 5.35)

SPURIOUS OUTPUTS TABLE (CONT)

	APPLIED					
	SIGNAL VOLTAGE			FREQUENCY DISCRETE		
REF NO.	PLRT AND VAL	UNITS	PCT TOL	VAL	UNITS	HZ + OR - TOL
1	3545	3546	3547	3548	3549	3550
2	3551	3552	3553	3554	3555	3556
3	3557	3558	3559	3560	3561	3562
4	3563	3564	3565	3566	3567	3568
5	3569	3570	3571	3572	3573	3574
6	3575	3576	3577	3578	3579	3580
7	3581	3582	3583	3584	3586	3587
8	3587	3588	3589	3590	3591	3592
9	3593	3594	3595	3596	3597	3598
10	3599	3600	3601	3602	3603	3604
11	3605	3606	3607	3608	3609	3610
12	3611	3612	3613	3614	3615	3616
13	3617	3618	3619	3620	3621	3622
114	3629	3630	3631	3632	3633	3634
15	3629	3630	3631	3632	3633	3634
	*5	*10	*4	*4	*9	*4
COL 1	6	7	8	9	10	11

*Number of print characters per column (column width). Heading spans are shown by underlining.

Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective cells. Only those lines from which codes were used will print. Columns 1-16 will appear in Section 4 of the MSE and columns 1, 2 and 17-22 will appear in Section 3 of the MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE VIII. SPURIOUS OUTPUTS (CONT)

(See 5.35)

SPURIOUS OUTPUTS TABLE (CONT)

REF NO.	APPLIED FREQUENCY RANGE FROM VAL	FROM UNITS	TO VAL	TO UNITS	LOAD OHMS
1	3635	3636	3637	3638	3639
2	3640	3641	3642	3643	3644
3	3645	3646	3647	3648	3649
4	3650	3651	3652	3653	3654
5	3655	3656	3657	3658	3659
6	3660	3661	3662	3663	3664
7	3665	3666	3667	3668	3669
8	3670	3671	3672	3673	3674
9	3675	3676	3677	3678	3679
10	3680	3681	3682	3683	3684
11	3685	3686	3687	3688	3689
12	3690	3691	3692	3693	3694
13	3695	3696	3697	3698	3699
14	3700	3701	3702	3703	3704
15	3705	3706	3707	3708	3709
*3	*4	*9	*4	*9	*4
COL 1	12	13	14	15	16

*Number of print characters per column (column width). Heading spans are shown by underlining.

Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective cells. Only those lines from which codes are used will print. Columsn 1-16 will appear in Section 4 of the MSE and columns 1, 2 and 17-22 will appear in Section 3 of the MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE VIII. SPURIOUS OUTPUTS (CONT)

(See 5.35)

SPURIOUS OUTPUTS TABLE (CONT)

	RESPONSE					
	SIGNAL VOLTAGE					
REF NO.	PLRT AND VAL	UNITS	PCT TOL	MIN OR MAX	MAX DB (+ OR -)	MAX PCT
1	3710	3711	3712	3713	37114	3715
2	3716	3717	3718	3719	3720	3721
3	3722	3723	3724	3725	3726	3727
4	3728	3729	3730	3731	3732	3733
5	3734	3735	3736	3737	3738	3739
6	3740	3741	3742	3743	3744	3745
7	3746	3747	3748	3749	3750	3751
8	3752	3753	3754	3755	3756	3757
9	3758	3759	3760	3761	3762	3763
10	3764	3765	3766	3767	3768	3769
11	3770	3771	3772	3773	3774	3775
12	3776	3777	3778	3779	3780	3781
13	3782	3783	3784	3785	3786	3787
14	3788	3789	3790	3791	3792	3793
15	3794	3795	3796	3797	3798	3799
	*4	*10	*4	*3	*8	*4
COL 1	17	l8	19	20	21	22

*Number of print characters per column (column width). Heading spans are shown by underlining.

Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective cells. Only those lines from which codes are used will print. Columns 1-16 will appear in Section 4 of the MSE and columns 1, 2 and 17-22 will appear in Section 3 of the MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET___ OF ___

TITLE CODE | REQUESTER NO.

1 2 3 4 5 6 7 8 9 10 11 12

THIS FORM IS USED TO INITIATE A REQUEST FOR AN AEDPS DOCUMENT (SEE PARAGRAPH TITLED SPECIFICATIONS REQUIREMENT SHEET, SECTION 5 OF MIL-STD-35).

MARK IF APERTURE CARDS REQUIRED ☐

MARK IF SEARCH ONLY ☐

REVISION TO AEDPS DOCUMENT NO.:

REQUESTER'S NAME _____

MAILING ADDRESS _____

PHONE NO. A/C _____

AMPLIFIERS CHARACTERISTIC NAME	CHAR CODE 13 14 15 16	CHARACTERISTIC VALUE 20 25 30 35 40 45 50 55 60 65 70 75 79
*DATE	1 Ø Ø 3	
*FSCM/CODE IDENT OF REQUESTER	1 Ø Ø 4	
*PRIME CONTRACT NUMBER	1 Ø Ø 5	
*APPLICABLE GENERAL SPECIFICATION	1 Ø Ø 6	
*APPROVED ITEM NAME CODE	1 Ø Ø 7	
*ITEM APPLICATION	1 Ø Ø 8	
DRAWING FIGURE NUMBER(S)	1 Ø Ø 9	
DIMENSIONS - TABLE A	USE	
*APPLICABLE DOCUMENTS TABLE B	BLANK	
*SOURCE - TABLE R OR S	SRS	
*SOURCE OR SPECIFICATION CONTROL - APPROPRIATE CODE(S)	LINES	
TEST METHOD - SELECT CODE 1560 or 1561		
MATERIALS INSPECTION - APPROPRIATE CODE		
QUALIFICATION INSPECTION SELECT CODE 5298 or 5299		
FIRST ARTICLE INSPECTION APPROPRIATE CODE(S)	USE	
QUALITY CONFORMANCE INSPECTION APPROPRIATE CODE(S)	BLANK SRS LINES	
GAIN, APPLIED SIGNAL VOLTAGE AND FREQUENCY (SEE 5.3.1)		
GAIN, RESPONSE SIGNAL VOLTAGE OR DECIBELS (SEE 5.3.1)		
POWER, APPLIED SIGNAL VOLTAGE AND FREQUENCY (SEE 5.3.1)		
POWER RESPONSE (SEE 5.3.1)		
FREQUENCY (SEE 5.3.1)		

AS A FINAL CHECK, SCAN THE SRS FOR THE FOLLOWING COMMON ERRORS:

- ☐ APPLICABLE DOCUMENTS - TABLE B PROPERLY ENTERED
- ☐ CHARACTERISTIC CODE USED MORE THAN ONCE (OTHER THAN MULTILINE STATEMENT)
- ☐ MANDATORY CHARACTERISTIC CODES TABLE AND VALUES NOT SUPPLIED
- ☐ MULTILINE STATEMENT NOT NUMBERED IN COLUMN 80
- ☐ POUND SIGN (#) OMITTED FROM END OF STATEMENT (CHARACTERISTIC VALUE)
- ☐ USE OF POUND SIGN (#) WITHOUT ACCOMPANYING CHARACTERISTIC VALUE
- ☐ ZERO (Ø) WRITTEN WITHOUT VIRGULE (O)

* MANDATORY

177

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Custodians:
Army - MI

Review Activities:
Army - AT
Army - AV
Army - EL
Army - ME
Army - MR
Army - SG
Army - WC

User Activity:
Army - MU

Preparing Activity:
Army - MI

(Project EDS-A120)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-STD-35-103(MI), Amplifiers, AEDPS

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Missile Command
ATTN: DRSMI-RCS
Redstone Arsenal, Al 35809

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.