MIL-STD-35-104A(MI)

26 SEPTEMBER 1986

SUPERSEDING
MIL-STD-35-104(MI)
15 DECEMBER 1975

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

UNIVERSAL JOINTS

AREA EDS

NO DELIVERABLE DATA
REQUIRED BY THIS DOCUMENT

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL COMMAND
ALEXANDRIA, VA 22333

Universal Joints
Automated Engineering
Document Preparation System

DOD-STD-35-104A(MI)

1. This Military Standard is approved for use by AMC, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Command, ATTN: AMSMI-RD-SE-TD-ST, Redstone Arsenal, Alabama 35898-5270, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-104A(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for Universal Joints.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	3
	2.1	Government Documents	3
	2.1.1	Specifications and Standards	3
	2.2	Other Publications	3
	2.3	Order of Precedence	4
	3.	DEFINITIONS	5
	4.	GENERAL REQUIREMENTS	6
	4.1	Introduction	6
	4.2	Specification Requirement Sheet (SRS)	6
	4.3	Configuration	6
	4.3.1	Dimensions	6
	4.3.2	Illustrations	6
	4.4	Units of Measure	6
	5.	DETAILED REQUIREMENTS	7
	5.1	Introduction	7
	5.2	MSE Formats	7
	5.3	Referenced Documents	7
	5.4	Tabulation	7
	5.5	Keyword Code Index (KCI) and Standard Paragraphs	8
	5.5.1	Interrelationship of Codes	8
	5.5.2	Automatic MSE Data	8
	5.5.3	DOD-STD-35 Tables	8

TABLES

Table	I.	Title Index	2
	II.	Tabulation Candidates	7

APPENDICES

APPENDIX	A.	Illustrations	60
	B.	Characteristic Code Index	74
		Index	77

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for Universal Joints.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate a MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts, have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects applicable to all AEDPS dash-numbered parts and included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specification (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for a MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSEs for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes, listed in the Title Index and entered on a SRS, specifies that the title of the MSE will be the title shown in the Title Index.

Each MSE title, listed in the Title Index, is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference. When more than one document is listed for a MSE title, this information will be useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
UNIVERSAL JOINTS	116001	MIL-U-3963	ANTIFRICTION
		MS24312	BEARINGS
		MIL-J-6193	PLAIN
		MS20270	LIGHT DUTY
		MS20271	HEAVY DUTY
		MIL-U-20625	BLOCK TYPE
UNIVERSAL JOINT, ANTIFRICTION BEARINGS	116002	MIL-U-3963	
		MS24312	ROUND HUBS
UNIVERSAL JOINT, BLOCK TYPE	116006	MIL-U-20625	ROUND HUBS
UNIVERSAL JOINT, PLAIN, LIGHT AND HEAVY DUTY	116009	MIL-J-6193	
		MS20270	LIGHT DUTY
		MS20271	HEAVY DUTY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Government Documents.

2.1.1 Specifications and Standards. Unless otherwise specified, the following specifications and standards, of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-U-3963	Universal Joint, Antifriction Bearings
MIL-J-6193	Joints, Universal, Plain, Light and Heavy Duty
MIL-U-20625	Universal Joints, Block Type, Mechanical Remote Control System

STANDARD

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-810	Environmental Test Methods and Engineering Guidelines

(Copies of specifications, standards, drawings, and publications, required by contractors in connection with specific procurement functions, should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other Publications. The following documents form a part of this standard to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the issue of the DoDISS specified in the solicitation. The issues of documents which have not been adopted shall be those in effect on the date of the cited DoDISS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

ASTME18	Rockwell Hardness and Rockwell Superficial Hardness of Metallic Materials
ASTME380	Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, PA 19103.)

(Nongovernment standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of Precedence. In the event of conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Universal Joints.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare a SRS for Universal Joints, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Universal Joints.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions, described in DOD-STD-35, are applicable to Universal Joints.

4.3.2 Illustrations. Illustrations, applicable to Universal Joints, are contained in Appendix A to this document.

4.4 Units of Measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE Formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced Documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table II provides codes for column headings which may be used for Universal Joints characteristics. When different units of measure are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

TABLE II. TABULATION CANDIDATES

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1564	END 1 ILL.	1570	END 2 ILL.	1734	SPEED RPM NOMINAL
1736	SPEED RPM MINIMUM	1738	SPEED RPM MAXIMUM	2400	TYPE
2402	CLASS	6996	NOMINAL WEIGHT OUNCES	6997	NOMINAL WEIGHT POUNDS
6998	NOM MASS GRAMS	6999	NOM MASS KILOGRAMS		

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

5.5 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on a SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and it's associated code. Enter, on the SRS, the code and the characteristic value required. After the part's unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.5.1 Interrelationship of Codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The standard paragraph, of which the code is a part, is shown adjacent to the code on the right-hand page. When a characteristic value, entered with a code, becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact characteristic value entry, as supplied with the code, except for "X" entries.

5.5.2 Automatic MSE Data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without making additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.5.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in DOD-STD-35. Refer to DOD-STD-35 for general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

(THIS PAGE INTENTIONALLY LEFT BLANK)

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*REQUESTER'S FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT.	0700
ONE SECTION DOCUMENT.	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6874	THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).
0107	
0108	0108.
	SCOPE.
	SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.
	PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.
	PART NUMBER. THE PART NUMBER FOR THE ITEMS IS (THE SAME AS THE NUMBER OF THIS DOCUMENT) PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.
6941	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.
6942	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION	
(TYPE)	2400
(CLASS)	2402
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
DIMENSION TABLE, (SEE TABLE III, DOD-STD-35)	
*UNITS (SELECT ONE)	
INCHES.	7572
MILLIMETERS.	7577
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950
NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.	
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	
MATERIALS (SEE TABLE VI, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VI IS USED.	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CLASSIFICATION.
2400	TYPE 2400 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
2402	CLASS 2402 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.
	MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FINISHES (SEE TABLE VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
DESIGN AND CONSTRUCTION	
TEMPERATURE	
MAXIMUM OPERATING (DEGREES CELSIUS)	6794
MAXIMUM STORAGE (DEGREES CELSIUS)	6796
MAXIMUM SERVICE (DEGREES CELSIUS)	6797
MINIMUM OPERATING (DEGREES CELSIUS)	6799
MINIMUM STORAGE (DEGREES CELSIUS)	6801
MINIMUM SERVICE (DEGREES CELSIUS)	6802
NOMINAL STORAGE (DEGREES CELSIUS)	6804
NOMINAL OPERATING (DEGREES CELSIUS)	6805

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
	DESIGN AND CONSTRUCTION.
6794	MAXIMUM OPERATING TEMPERATURE. THE OPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6794 DEGREES CELSIUS.
6796	MAXIMUM STORAGE TEMPERATURE. THE STORAGE TEMPERATURE SHALL BE NOT GREATER THAN 6796 DEGREES CELSIUS.
6797	MAXIMUM SERVICE TEMPERATURE. THE SERVICE TEMPERATURE SHALL BE NOT GREATER THAN 6797 DEGREES CELSIUS.
6799	MINIMUM OPERATING TEMPERATURE. THE OPERATING TEMPERATURE SHALL BE NOT LESS THAN 6799 DEGREES CELSIUS.
6801	MINIMUM STORAGE TEMPERATURE. THE STORAGE TEMPERATURE SHALL BE NOT LESS THAN 6801 DEGREES CELSIUS.
6802	MINIMUM SERVICE TEMPERATURE. THE SERVICE TEMPERATURE SHALL BE NOT LESS THAN 6802 DEGREES CELSIUS.
6804	NOMINAL STORAGE TEMPERATURE. THE STORAGE TEMPERATURE SHALL BE 6804 DEGREES CELSIUS.
6805	NOMINAL OPERATING TEMPERATURE. THE OPERATING TEMPERATURE SHALL BE 6805 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WEIGHT	
NOMINAL WEIGHT/MASS PER UNIT (SELECT ONE)	
(OUNCES)	6996
(POUNDS)	6997
(GRAMS)	6998
(KILOGRAMS)	6999
DUTY CYCLE	
CONTINUOUSLY (SELECT ONE)	
(HOURS PER DAY)	1602
(DAYS PER MONTH)	1604
INTERMITTENTLY (SELECT ONE)	
ON(HOURS)	1606
*OFF(HOURS)	1608
(CYCLES PER DAY)	1610

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6996	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6996 OUNCE(S).
6997	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6997 POUND(S).
6998	NOMINAL MASS PER UNIT. THE MASS PER UNIT SHALL BE 6998 GRAM(S).
6999	NOMINAL MASS PER UNIT. THE MASS PER UNIT SHALL BE 6999 KILOGRAM(S).
	DUTY CYCLE.
1602	THE DEVICE SHALL BE CAPABLE OF OPERATING CONTINUOUSLY 1602 HOUR(S) PER DAY.
1604	THE DEVICE SHALL BE CAPABLE OF OPERATING CONTINUOUSLY 1604 DAY(S) PER MONTH.
1606 1608	THE DEVICE SHALL BE CAPABLE OF OPERATING INTERMITTENTLY FOR 1606 HOUR(S) ON AND 1608 HOUR(S) OFF.
1610	THE DEVICE SHALL BE CAPABLE OF OPERATING INTERMITTENTLY AT A RATE OF 1610 CYCLE(S) PER DAY.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
END CONFIGURATION	
END 1 (ILLUSTRATION NUMBER)	1564
END 2 (ILLUSTRATION NUMBER)	1570
NOTE: IF ENDS ARE THE SAME SHAPE BUT DIFFERENT SIZES USE ILLUSTRATIONS WITH DIFFERENT LEGENDS FOR END 1 AND END 2.	
LUBRICATION	
FREQUENCY (SELECT ONE)	
(HOURS OPERATION)	1640
(DAYS OPERATION)	1642
NOT REQUIRED.	1644
METHOD (SELECT ONE)	
LUBRICATE BY GREASE FITTING.	1646
LUBRICATE BY OIL RESERVOIR.	1648
LUBRICATE BY EXTERNAL APPLICATION.	1650
RETAINING COVER REQUIRED.	1652
SPEED (SELECT ONE)	
CONSTANT.	1730

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1564	THE CONFIGURATION FOR END 1 OF THE DEVICE SHALL BE IN ACCORDANCE WITH ILLUSTRATION 1564.
1570	THE CONFIGURATION FOR END 2 OF THE DEVICE SHALL BE IN ACCORDANCE WITH ILLUSTRATION 1570.
	LUBRICATION.
1640	THE DEVICE SHALL BE LUBRICATED AFTER 1640 HOUR(S) OF OPERATION.
1642	THE DEVICE SHALL BE LUBRICATED AFTER 1642 DAY(S) OF OPERATION.
1644	THE DEVICE SHALL NOT REQUIRE ADDITIONAL LUBRICATION DURING IT'S OPERATIONAL LIFETIME.
1646	THE DEVICE SHALL CONTAIN A GREASE FITTING FOR LUBRICATION.
1648	THE DEVICE SHALL CONTAIN AN OIL RESERVOIR FOR LUBRICATION.
1650	THE DEVICE SHALL BE LUBRICATED AS REQUIRED BY APPLYING LUBRICANT EXTERNALLY.
1652	THE DEVICE SHALL CONTAIN A LUBRICANT RETAINING COVER.
	SPEED
1730	THE SPEED SHALL BE CONSTANT.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VARIABLE.	1732
REVOLUTIONS PER MINUTE	
NOMINAL (RPM)	1734
MINIMUM (RPM)	1736
MAXIMUM (RPM)	1738
ASSEMBLY ALIGNMENT (SELECT ONE)	
YOKE TO YOKE CONCENTRICITY (TIR)	1586
HUB TO HUB COINCIDENCE (TIR)	1588
TORQUE (STATIC)	
PER STATIC TORQUE TABLE	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1732	THE SPEED SHALL BE VARIABLE.
1734	THE SPEED SHALL BE 1734 RPM NOMINAL.
1736	THE SPEED SHALL BE NOT LESS THAN 1736 RPM.
1738	THE SPEED SHALL BE NOT GREATER THAN 1738 RPM.
1586	ASSEMBLY ALIGNMENT. THE CONCENTRICITY OF YOKES TO EACH OTHER IN THE ASSEMBLED UNIVERSAL JOINT SHALL BE 1586 TIR.
1588	ASSEMBLY ALIGNMENT. THE COINCIDENCE OF HUBS TO EACH OTHER WHEN AXES OF THE HUBS ARE PARALLEL IN THE ASSEMBLED UNIVERSAL JOINT SHALL BE 1588 TIR.
	TORQUE (STATIC). STATIC TORQUE REQUIREMENTS SHALL BE AS SHOWN IN THE STATIC TORQUE TABLE.

STATIC TORQUE TABLE

STATIC TORQUE LB-IN.	STATIC TORQUE N-M	MAX. ANGLE OF DEFLECTION DEGREES	TORQUE DURATION MINUTES
2500	2501	2502	2503
2504	2505	2506	2507
2508	2509	2510	2511
2512	2513	2514	2515
2516	2517	2518	2519
2520	2521	2522	2523
2524	2525	2526	2527
2528	2529	2530	2531

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TORQUE (TRANSMITTED)	
PER TRANSMITTED TORQUE TABLE	
AXIAL LOAD	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1822
NO PERMANENT DEFORMATION OR EXCESSIVE TIGHTNESS.	1824

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

TORQUE (TRANSMITTED). TRANSMITTED TORQUE REQUIREMENT(S) SHALL BE AS SHOWN IN THE TRANSMITTED TORQUE TABLE.

TRANSMITTED TORQUE TABLE

TRANSMITTED TORQUE LB-IN.	OF N-M	TEST ANGLE OF OPERATION DEGREES	EFFICIENCY PERCENT	TEST DURATION MINUTE
2600	2601	2602	2603	2604
2605	2606	2607	2608	2609
2610	2611	2612	2613	2614
2615	2616	2617	2618	2619
2620	2621	2622	2623	2624
2625	2626	2627	2628	2629
2630	2631	2632	2633	2634
2635	2636	2637	2638	2639

1822 AXIAL LOAD. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1822.

1824 AXIAL LOAD. THERE SHALL BE NO PERMANENT DEFORMATION AND NO EXCESSIVE TIGHTNESS OF THE UNIVERSAL JOINT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1802
PER MIL-J-6193.	1806
TEST ANGLE OF OPERATION (DEGREES)	1808
TEST DURATION (SECONDS)	1810
TEST LOAD (SELECT ONE)	
(POUNDS)	1812
(NEWTONS)	1814
BACKLASH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1858
MAXIMUM END PLAY (DEGREES)	1860
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1842
PER MIL-U-20625.	1844
TEST ANGLE OF OPERATION (DEGREES)	1846

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1802	AXIAL LOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1802.
1806	AXIAL LOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-J-6193.
1808	THE TEST ANGLE OF OPERATION SHALL BE 1808 DEGREES.
1810	TEST DURATION SHALL BE 1810 SECOND(S).
1812	A TENSION AND COMPRESSION LOAD OF 1812 POUND(S) SHALL BE APPLIED.
1814	A TENSION AND COMPRESSION LOAD OF 1814 NEWTON(S) SHALL BE APPLIED.
1858	BACKLASH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1858.
1860	BACKLASH. THE BACKLASH SHALL BE NOT GREATER THAN 1860 DEGREES.
1842	BACKLASH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1842.
1844	BACKLASH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-U-20625.
1846	THE TEST ANGLE OF OPERATION SHALL BE 1846 DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DUST	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4724
NO EVIDENCE OF PHYSICAL DAMAGE.	1510
NO EVIDENCE OF DUST PENETRATION.	4801
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4895
PER MIL-STD-810, METHOD 510.	4953
OPERATED DURING TEST STEP (NUMBERS)	4872
*DURATION OF OPERATION (HOURS)	6299
SPECIMEN ORIENTATION SHALL BE CHANGED DURING TEST.	1539
SECOND 6-HOUR TEST IMMEDIATELY FOLLOWING TEMPERATURE STABILIZATION IN STEP 2.	4956
STEP 2 AND STEP 3 TEMPERATURE (DEGREES CELSIUS)	4840

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4724	DUST. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4724.
1510	DUST. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4801	THERE SHALL BE NO EVIDENCE OF DUST PENETRATION.
4895	DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4895.
4953	DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 510 OF MIL-STD-810.
4872	ITEM(S) SHALL BE OPERATED DURING STEP(S) 4872.
6299	DURATION OF OPERATION SHALL BE 6299 HOUR(S).
1539	ORIENTATION SHALL BE CHANGED DURING THE TEST.
4956	THE SECOND 6-HOUR TEST SHALL BE PERFORMED IMMEDIATELY AFTER REACHING STABILIZATION IN STEP 2.
4840	THE TEMPERATURE SHALL BE 4840 DEGREES CELSIUS FOR STEPS 2 AND 3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
END PLAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1894
AS FOLLOWS:	
MAXIMUM END PLAY (SELECT ONE)	
(INCHES)	1896
(MILLIMETERS)	1898
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1872
PER MIL-J-6193.	1876
CLOCKWISE END LOAD (SELECT ONE)	
(POUNDS)	1878
(NEWTONS)	1880
COUNTERCLOCKWISE END LOAD (SELECT ONE)	
(POUNDS)	1882
(NEWTONS)	1884

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1894	END PLAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1894.
	END PLAY. THE REQUIREMENTS SHALL BE AS FOLLOWS:
1896	END PLAY SHALL BE NOT GREATER THAN 1896 INCH(S).
1898	END PLAY SHALL BE NOT GREATER THAN 1898 MILLIMETER(S).
1872	END PLAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1872.
1876	END PLAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-J-6193.
1878	A CLOCKWISE END LOAD OF 1878 POUND(S) SHALL BE APPLIED.
1880	A COUNTERCLOCKWISE END LOAD OF 1882 POUND(S) SHALL BE APPLIED.
1882	A CLOCKWISE END LOAD OF 1880 NEWTON(S) SHALL BE APPLIED.
1884	A COUNTERCLOCKWISE END LOAD OF 1884 NEWTON(S) SHALL BE APPLIED.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1956
AS FOLLOWS:	
MAXIMUM TORSIONAL PLAY (DEGREES)	1958
NO LUBRICANT LOSS.	1960
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1922
PER MIL-J-6193.	1926
TEST ANGLE OF OPERATION (DEGREES)	1928
TEST DURATION (HOURS)	1930
TEST TEMPERATURE (DEGREES CELSIUS)	1932
TEST SPEED (RPM)	1934
DUTY CYCLE	
ON (SECONDS)	1936
*OFF (SECONDS)	1938

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1956	ENDURANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1956.
	ENDURANCE. THE REQUIREMENTS SHALL BE AS FOLLOWS:
1958	TORSIONAL PLAY SHALL BE NOT GREATER THAN 1958 DEGREES.
1960	THERE SHALL BE NO EVIDENCE OF LOSS OF LUBRICANT.
1922	ENDURANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1922.
1926	ENDURANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-J-6193.
1928	THE TEST ANGLE OF OPERATION SHALL BE 1928 DEGREES.
1930	TEST DURATION SHALL BE 1930 HOUR(S).
1932	TEST TEMPERATURE SHALL BE 1932 DEGREES CELSIUS.
1934	THE DEVICE SHALL OPERATE AT A SPEED OF 1934 RPM.
1936 1938	A DUTY CYCLE OF 1936 SECOND(S) ON AND 1938 SECOND(S) OFF SHALL BE USED.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TORSIONAL PLAY TEST LOAD (SELECT ONE)	
(POUND-INCHES)	1940
(NEWTON-METERS)	1942
TENSION AND COMPRESSION TEST LOAD (SELECT ONE)	
(POUNDS)	1944
(NEWTONS)	1946
TORQUE TEST LOAD (SELECT ONE)	
(POUND-INCHES)	1948
(NEWTON-METERS)	1950
FRICTION TORQUE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2012
AS FOLLOWS:	
MAXIMUM FRICTION TORQUE (SELECT ONE)	
(POUND-INCHES)	2014
(NEWTON-METERS)	2016

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1940	A TORSIONAL PLAY LOAD OF 1940 POUND-INCH(S) SHALL BE APPLIED.
1942	A TORSIONAL PLAY LOAD OF 1942 NEWTON-METER(S) SHALL BE APPLIED.
1944	A TENSION AND COMPRESSION PLAY LOAD OF 1944 POUND-INCH(S) SHALL BE APPLIED.
1946	A TENSION AND COMPRESSION PLAY LOAD OF 1946 NEWTON-METER(S) SHALL BE APPLIED.
1948	A TORQUE LOAD OF 1948 POUND-INCH(S) SHALL BE APPLIED.
1950	A TORQUE LOAD OF 1950 NEWTON-METER(S) SHALL BE APPLIED.
2012	FRICTION TORQUE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2012. FRICTION TORQUE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2014	FRICTION TORQUE SHALL BE NOT GREATER THAN 2014 POUND-INCH(S).
2016	FRICTION TORQUE SHALL BE NOT GREATER THAN 2016 NEWTON-METER(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1972
PER MIL-U-3963.	1974
FIRST TEST	
CONDITIONING TEMPERATURE (DEGREES CELSIUS)	1976
CONDITIONING DURATION (HOURS)	1978
OPERATING TEMPERATURE (DEGREES CELSIUS)	1980
OPERATION DURATION (HOURS)	1982
ANGLE OF OPERATION (DEGREES)	1984
SPEED (RPM)	1986
SECOND TEST	
CONDITIONING TEMPERATURE (DEGREES CELSIUS)	1988
CONDITIONING DURATION (HOURS)	1990
OPERATING TEMPERATURE (DEGREES CELSIUS)	1992
OPERATION DURATION (HOURS)	1994
ANGLE OF OPERATION (DEGREES)	1996
SPEED (RPM)	1998

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1972	FRICTION TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1972.
1974	FRICTION TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-U-3963.
1976	FIRST TEST CONDITIONING TEMPERATURE SHALL BE 1976 DEGREES CELSIUS.
1978	FIRST TEST CONDITIONING DURATION SHALL BE 1978 HOUR(S).
1980	FIRST TEST OPERATING TEMPERATURE SHALL BE 1980 DEGREES CELSIUS.
1982	FIRST TEST OPERATION DURATION SHALL BE 1982 HOUR(S).
1984	FIRST TEST ANGLE OF OPERATION SHALL BE 1984 DEGREE(S).
1986	FIRST TEST SPEED OF THE DEVICE SHALL BE 1986 RPM.
1988	SECOND TEST CONDITIONING TEMPERATURE SHALL BE 1988 DEGREES CELSIUS.
1990	SECOND TEST CONDITIONING DURATION SHALL BE 1990 HOUR(S).
1992	SECOND TEST OPERATING TEMPERATURE SHALL BE 1992 DEGREES CELSIUS.
1994	SECOND TEST OPERATION DURATION SHALL BE 1994 HOUR(S).
1996	SECOND TEST ANGLE OF OPERATION SHALL BE 1996 DEGREE(S).
1998	SECOND TEST SPEED OF THE DEVICE SHALL BE 1998 RPM.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HARDNESS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2048
ROCKWELL SCALE (LETTER-NUMBERS)	2050
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2032
PER ASTME18.	2034
TEST ON HUB FLANGE.	2036
TEST ON HUB SECTION.	2038
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4798
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	4799
NO DEGRADATION OF PERFORMANCE.	4815
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4788
PER MIL-STD-810, METHOD 507.	4871

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2048	HARDNESS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2048.
2050	HARDNESS. THE HARDNESS SHALL BE NOT GREATER THAN 2050 ON THE ROCKWELL HARDNESS SCALE.
2032	HARDNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2032.
2034	HARDNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTME18.
2036	POINT OF HARDNESS TEST SHALL BE THE HUB FLANGE.
2038	POINT OF HARDNESS TEST SHALL BE THE HUB SECTION.
4798	HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.
4799	HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
4815	THERE SHALL BE NO DEGRADATION OF PERFORMANCE.
4788	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.
4871	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 507 OF MIL-STD-810.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*PROCEDURE NUMBER (SELECT ONE)	
TEST PROCEDURE I.	4767
EXTREME TEMPERATURE BEFORE TESTING (DEGREES CELSIUS)	4777
*DURATION OF TEMPERATURE EXPOSURE (HOURS)	4778
TEST PROCEDURE II.	6334
CYCLE LIMITED TO 24 HOURS DURATION.	4716
TEST PROCEDURE III.	6335
TEST PROCEDURE IV.	6336
TEST PROCEDURE V.	6337
NUMBER OF CYCLES (NUMBER)	4800
WATER PURITY BY CONDUCTIVITY METHOD.	4764
OPERATION AND MEASUREMENT AT HIGH TEMPERATURE PORTION OF CYCLE(S) (NUMBER)	4916
OPERATION AND MEASUREMENT AT LOW TEMPERATURE PORTION OF CYCLE(S) (NUMBER)	1554
LUBRICANT RETENTION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2122

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4767	PROCEDURE NUMBER I SHALL APPLY.
4777	SPECIMEN(S) SHALL BE EXPOSED TO 4777 DEGREES CELSIUS BEFORE TESTING.
4778	DURATION OF EXPOSURE TO EXTREME TEMPERATURE SHALL BE 4778 HOUR(S).
6334	PROCEDURE NUMBER II SHALL APPLY.
4716	CYCLE(S) SHALL BE LIMITED TO 24 HOURS DURATION.
6335	PROCEDURE NUMBER III SHALL APPLY.
6336	PROCEDURE NUMBER IV SHALL APPLY.
6337	PROCEDURE NUMBER V SHALL APPLY.
4800	THERE SHALL BE 4800 CYCLE(S).
4764	WATER PURITY SHALL BE DETERMINED BY THE CONDUCTIVITY METHOD.
4916	OPERATION AND MEASUREMENTS SHALL BE PERFORMED AT HIGH TEMPERATURE DURING CYCLE(S) 4916.
1554	OPERATION AND MEASUREMENTS SHALL BE PERFORMED AT LOW TEMPERATURE DURING CYCLE(S) 1554.
2122	LUBRICANT RETENTION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2122.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
AS FOLLOWS:	
NO EVIDENCE OF LOSS OF LUBRICANT.	2124
NO EVIDENCE OF LOSS OF LUBRICANT FROM RETENTION COVER.	2126
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2092
PER MIL-J-6193.	2094
FIRST TEST	
ANGLE OF OPERATION (DEGREES)	2096
DURATION (HOURS)	2098
SPEED (RPM)	2100
TEMPERATURE (DEGREES CELSIUS)	2102
SECOND TEST	
ANGLE OF OPERATION (DEGREES)	2104
DURATION (HOURS)	2106
SPEED (RPM)	2108
TEMPERATURE (DEGREES CELSIUS)	2110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	LUBRICANT RETENTION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2124	THERE SHALL BE NO EVIDENCE OF LOSS OF LUBRICANT.
2126	THERE SHALL BE NO EVIDENCE OF LOSS OF LUBRICANT FROM THE LUBRICANT RETENTION COVER.
2092	LUBRICANT RETENTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2092.
2094	LUBRICATN RETENTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-J-6193.
2096	FIRST TEST ANGLE OF OPERATION SHALL BE 2096 DEGREE(S).
2098	FIRST TEST DURATION SHALL BE 2098 HOUR(S).
2100	FIRST TEST SPEED OF THE DEVICE SHALL BE 2100 RPM.
2102	FIRST TEST TEMPERATURE SHALL BE 2102 DEGREES CELSIUS.
2104	SECOND TEST ANGLE OF OPERATION SHALL BE 2104 DEGREE(S).
2106	SECOND TEST DURATION SHALL BE 2106 HOUR(S).
2108	SECOND TEST SPEED OF THE DEVICE SHALL BE 2108 RPM.
2110	SECOND TEST TEMPERATURE SHALL BE 2110 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT FOG	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4998
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.	4999
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4779
PER MIL-STD-810, METHOD 509.	4780
SALT SOLUTION (PERCENT)	4786
EXPOSURE PERIOD (HOURS)	4783
DRYING PERIOD (HOURS)	4775
OPERATE (SELECT ONE)	
OPERATE ONLY AFTER DRYING.	6245
OPERATE ONLY AFTER EXPOSURE.	6246
OPERATE AFTER EXPOSURE AND AFTER DRYING.	6247
OPERATE AFTER 24 HOURS OF EXPOSURE.	6248
SHOCK	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	7315

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4998	SALT FOG. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4998.
4999	SALT FOG. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
4779	SALT FOG. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4779.
4780	SALT FOG. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 509 OF MIL-STD-810.
4786	SOLUTION SHALL BE 4786 PERCENT SALT.
4783	DURATION OF THE TEST SHALL BE 4783 HOUR(S).
4775	DRYING PERIOD SHALL BE 4775 HOUR(S).
6245	ITEM(S) SHALL BE OPERATED ONLY AFTER DRYING.
6246	ITEM(S) SHALL BE OPERATED ONLY AFTER EXPOSURE.
6247	ITEM(S) SHALL BE OPERATED AFTER EXPOSURE AND AFTER DRYING.
6248	ITEM(S) SHALL BE OPERATED AFTER 24 HOURS OF EXPOSURE.
7315	SHOCK. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 7315.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NO EVIDENCE OF PHYSICAL DAMAGE.	7316
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	7311
PER MIL-STD-810, METHOD 516.	7312
*PROCEDURE	
PROCEDURE I.	7313
*FIGURE (SELECT ONE)	
FIGURE 516-1 APPLIES.	7317
FIGURE 516-2 APPLIES.	7318
*AMPLITUDE, A OR B (LETTER)	7305
*DURATION, C OR D (LETTER)	7306
PROCEDURE II.	6327
PROCEDURE III.	6338
*FIGURE (SELECT ONE)	
FIGURE 516-1 APPLIES.	6339
FIGURE 516-2 APPLIES.	6340
*AMPLITUDE A OR B (LETTER)	6341
*DURATION C OR D (LETTER)	6342

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7316	SHOCK. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
7311	SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 7311.
7312	SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 516 OF MIL-STD-810.
7313	PROCEDURE NUMBER I SHALL APPLY.
7317	THE SHOCK PULSE SHAPE SHALL BE SAWTOOTH IN ACCORDANCE WITH FIGURE 516-1 OF METHOD 516 OF MIL-STD-810.
7318	THE SHOCK PULSE SHAPE SHALL BE HALF SINE WAVE IN ACCORDANCE WITH FIGURE 516-2 OF METHOD 516 OF MIL-STD-810.
7305	AMPLITUDE LETTER 7305 SHALL APPLY.
7306	DURATION LETTER 7306 SHALL APPLY.
6327	PROCEDURE NUMBER II SHALL APPLY.
6338	PROCEDURE NUMBER III SHALL APPLY.
6339	THE SHOCK PULSE SHAPE SHALL BE SAWTOOTH IN ACCORDANCE WITH FIGURE 516-1 OF METHOD 516 OF MIL-STD-810.
6340	THE SHOCK PULSE SHAPE SHALL BE HALF SINE WAVE IN ACCORDANCE WITH FIGURE 516-2 OF METHOD 516 OF MIL-STD-810.
6341	AMPLITUDE LETTER 6341 SHALL APPLY.
6342	DURATION LETTER 6342 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PROCEDURE IV.	6343
*FIGURE (SELECT ONE)	
FIGURE 516-1 APPLIES.	6344
FIGURE 516-2 APPLIES.	6345
*AMPLITUDE, A OR B (LETTER)	6346
*DURATION, C OR D (LETTER)	6347
PROCEDURE V.	6348
PROCEDURE VI.	6349
TEST TEMPERATURE (DEGREES CELSIUS)	7307
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	7308
OPERATION DURING TEST REQUIRED.	7309
MINIMUM TEST ANGLE (DEGREES)	2160
TEST SPEED (RPM)	2162
SIDE PLAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2222

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6343	PROCEDURE NUMBER IV SHALL APPLY.
6344	THE SHOCK PULSE SHAPE SHALL BE SAWTOOTH IN ACCORDANCE WITH FIGURE 516-1 OF METHOD 516 OF MIL-STD-810.
6345	THE SHOCK PULSE SHAPE SHALL BE HALF SINE WAVE IN ACCORDANCE WITH FIGURE 516-2 OF METHOD 516 OF MIL-STD-810.
6346	AMPLITUDE LETTER 6346 SHALL APPLY.
6347	DURATION LETTER 6347 SHALL APPLY.
6348	PROCEDURE NUMBER V SHALL APPLY.
6349	PROCEDURE NUMBER VI SHALL APPLY.
7307	THE TEST TEMPERATURE SHALL BE 7307 DEGREES CELSIUS.
7308	THE TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 7308 DEGREES CELSIUS.
7309	OPERATION DURING THE TEST IS REQUIRED.
2160	THE TEST ANGLE OF OPERATION SHALL BE NOT LESS THAN 2160 DEGREE(S).
2162	THE SPEED OF THE DEVICE SHALL BE 2162 RPM.
2222	SIDE PLAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2222.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
AS FOLLOWS:	
MAXIMUM SIDE PLAY (SELECT ONE)	
(INCHES)	2224
(MILLIMETERS)	2226
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2202
PER MIL-J-6193.	2206
CLOCKWISE SIDE LOAD (SELECT ONE)	
(POUNDS)	2208
(NEWTONS)	2210
COUNTERCLOCKWISE SIDE LOAD (SELECT ONE)	
(POUNDS)	2212
(NEWTONS)	2214
TIGHTNESS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____ .	2262

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	SIDE PLAY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2224	SIDE PLAY SHALL BE NOT GREATER THAN 2224 INCH(S).
2226	SIDE PLAY SHALL BE NOT GREATER THAN 2226 MILLIMETER(S).
2202	SIDE PLAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2202.
2206	SIDE PLAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-J-6193.
2208	A CLOCKWISE SIDE LOAD OF 2208 POUND(S) SHALL BE APPLIED.
2210	A CLOCKWISE SIDE LOAD OF 2210 NEWTON(S) SHALL BE APPLIED.
2212	A COUNTERCLOCKWISE SIDE LOAD OF 2212 POUND(S) SHALL BE APPLIED.
2214	A COUNTERCLOCKWISE SIDE LOAD OF 2214 NEWTON(S) SHALL BE APPLIED.
2262	TIGHTNESS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2262.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
AS FOLLOWS:	
MAXIMUM MOMENT OF FORCE (SELECT ONE)	
(POUND-INCHES)	2264
(NEWTON METERS)	2266
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2242
PER MIL-J-6193.	2246
MINIMUM MOVEMENT (DEGREES)	2248
TORSIONAL PLAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2312
MAXIMUM TORSIONAL PLAY (DEGREES)	2314
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2282
PER MIL-J-6193.	2286

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	TIGHTNESS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2264	THE MOMENT OF FORCE REQUIRED SHALL BE NOT GREATER THAN 2264 POUND-INCH(S).
2266	THE MOMENT OF FORCE REQUIRED SHALL BE NOT GREATER THAN 2266 NEWTON-METER(S).
2242	TIGHTNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2242.
2246	TIGHTNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-J-6193.
2248	ONE END OF THE DEVICE SHALL BE MOVED THROUGH AN INCLUSIVE ANGLE OF NOT LESS THAN 2248 DEGREE(S).
2312	TORSIONAL PLAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2312.
2314	TORSIONAL PLAY. THE TORSIONAL PLAY SHALL BE NOT GREATER THAN 2314 DEGREE(S).
2282	TORSIONAL PLAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2282.
2286	TORSIONAL PLAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-J-6193.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLOCKWISE TORQUE (SELECT ONE)	
(POUND-INCHES)	2288
(NEWTON-METERS)	2290
COUNTERCLOCKWISE TORQUE (SELECT ONE)	
(POUND-INCHES)	2292
(NEWTON-METERS)	2294
VIBRATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4681
NO EVIDENCE OF PHYSICAL DAMAGE.	4682
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1505
PER MIL-STD-810, METHOD 514.	1514
*PROCEDURE NUMBER (ROMAN NUMERAL)	1518
EQUIPMENT (CATEGORY)	1540
CURVE (LETTERS)	1525

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2288	A CLOCKWISE TORQUE OF 2288 POUND-INCH(S) SHALL BE APPLIED.
2290	A CLOCKWISE TORQUE OF 2290 NEWTON-METER(S) SHALL BE APPLIED.
2292	A COUNTERCLOCKWISE TORQUE OF 2292 POUND-INCH(S) SHALL BE APPLIED.
2294	A COUNTERCLOCKWISE TORQUE OF 2294 NEWTON-METER(S) SHALL BE APPLIED.
4681	VIBRATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4681.
4682	VIBRATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1505	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1505.
1514	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 514 OF MIL-STD-810.
1518	PROCEDURE NUMBER 1518 SHALL APPLY.
1540	THE EQUIPMENT CATEGORY SHALL BE 1540 IN ACCORDANCE WITH METHOD 514 OF MIL-STD-810.
1525	CURVE 1525 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
APPLICABLE TABLE (NUMBER)	1532
APPLICABLE FIGURE (NUMBER)	1559
OPERATION NOT REQUIRED.	1424
TEMPERATURE (DEGREES CELSIUS)	1542
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1543
DURATION AT TEMPERATURE (HOURS)	1544
PERCENT RATED LOAD APPLIED (PERCENT)	4678
MOUNTING HARDWARE (SEE TABLE VIII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VIII IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1532	PROCEDURE AND TIME SCHEDULE SHALL BE AS SHOWN ON TABLE 1532 OF METHOD 514 OF MIL-STD-810.
1559	TEST CURVES SHALL BE AS SHOWN IN FIGURE 1559 OF METHOD 514 OF MIL-STD-810.
1424	OPERATION DURING THE TEST IS NOT REQUIRED.
1542	VIBRATION TEST SHALL BE PERFORMED AT A TEMPERATURE OF 1542 DEGREES CELSIUS.
1543	TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1543 DEGREES CELSIUS.
1544	THE TEMPERATURE TIME DURATION SHALL BE 1544 HOUR(S).
4678	THE LOAD SHALL BE 4678 PERCENT OF THE RATED LOAD.

MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.

6870 WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.

ADDITIONAL REQUIREMENTS.

7001 (A) 7001.

7002 (B) 7002.

7003 (C) 7003.

7004 (D) 7004.

7005 (E) 7005.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-130.	7629
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995

APPLICABLE DOCUMENTS (SEE DOD-STD-35)

QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)

PACKAGING (SEE DOD-STD-35)

NOTES (SEE DOD-STD-35)

NOMENCLATURE (SEE DOD-STD-35)

SUPERSEDED DOCUMENT (SEE DOD-STD-35)

PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

Custodians:
Army-MI

User activity:
Army-MU

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

Preparing activity:
Army-MI


(Project EDS-A361)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.


APPENDIX A

ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

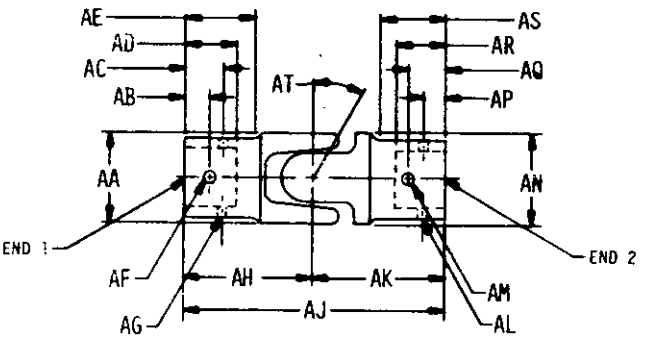


116-01-1

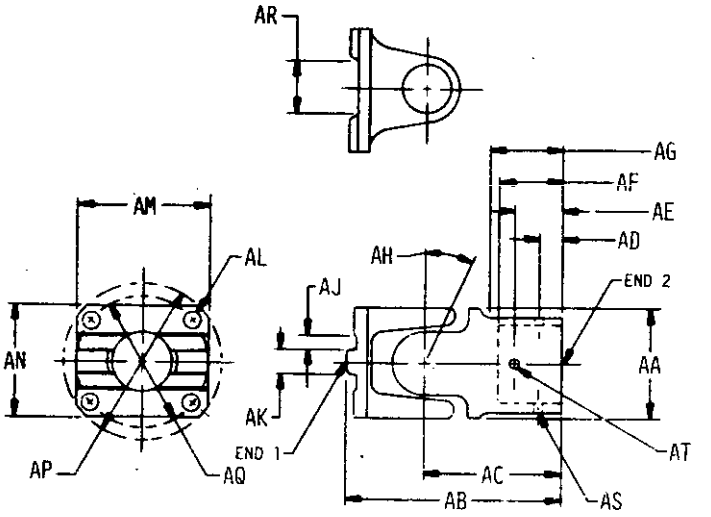


116-01-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

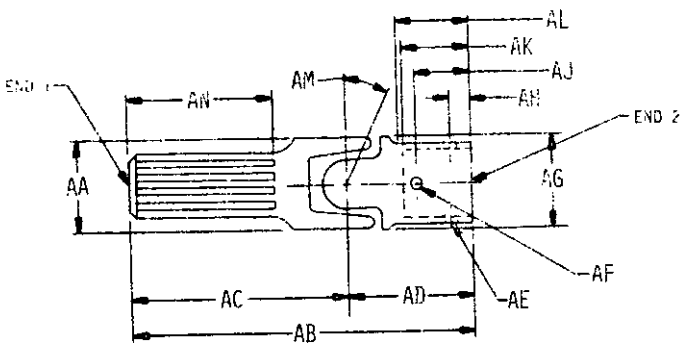


116-01-3

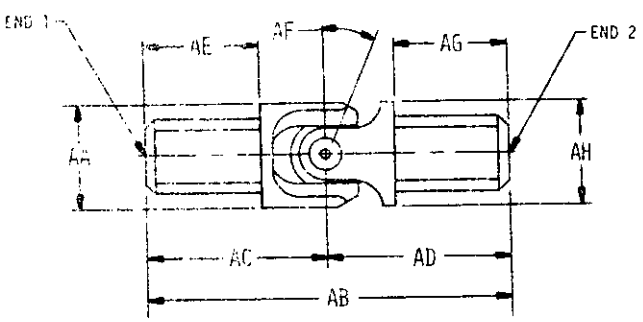


116-01-4

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

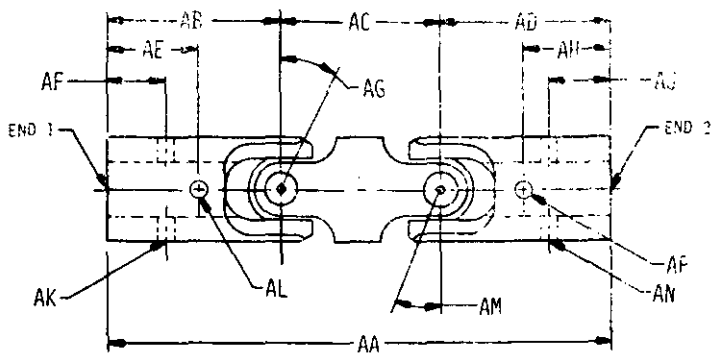


116-01-5

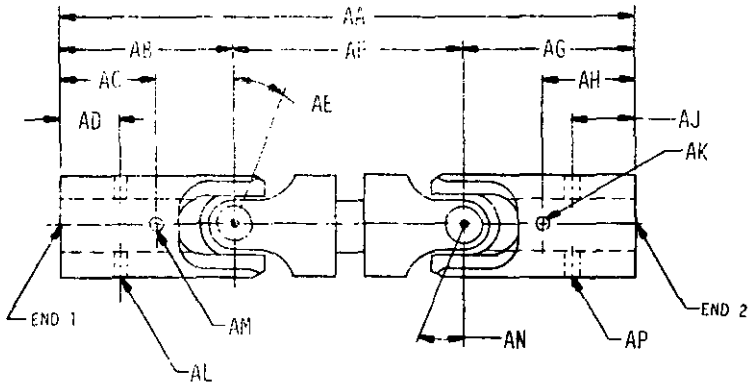


116-01-6

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

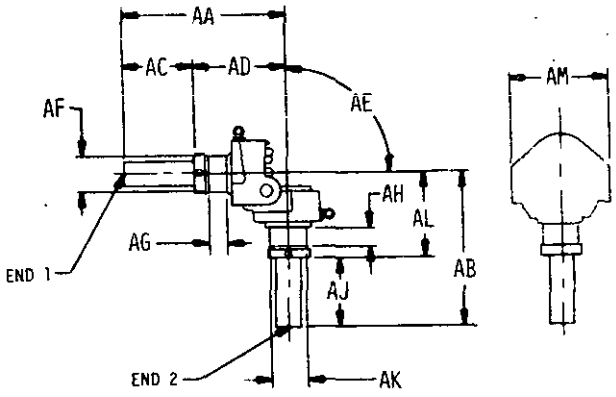


116-01-7




116-01-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

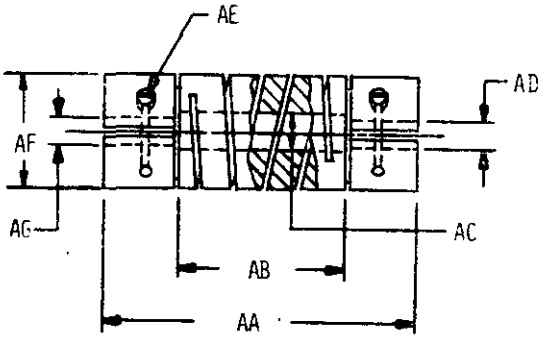


116-01-9


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

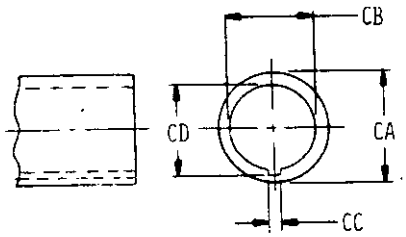

116-02-3

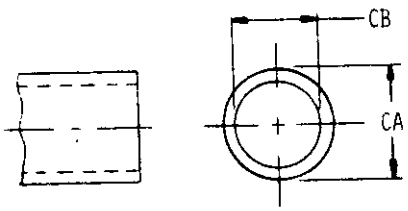


116-02-4

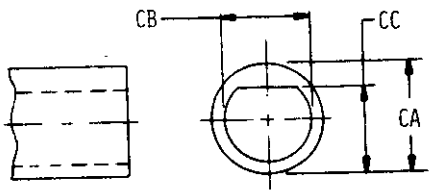


116-02-5


Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

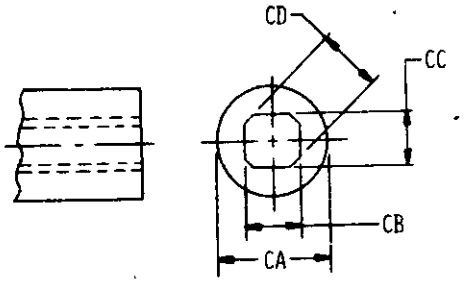

116-02-6

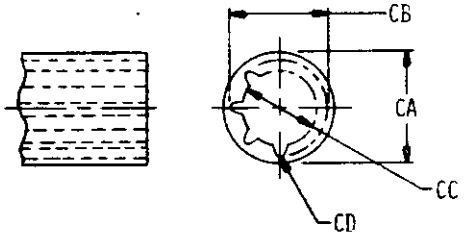


116-02-7

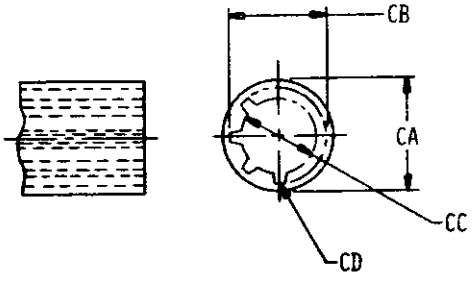


116-02-8


Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

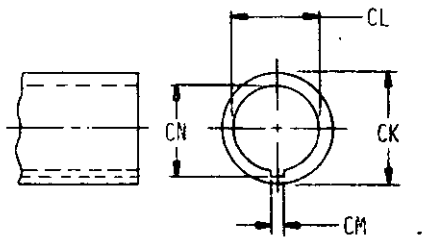

116-03-3

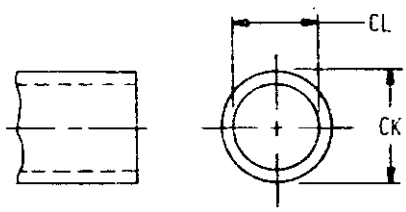


116-03-4

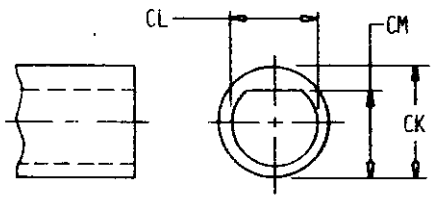


116-03-5


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

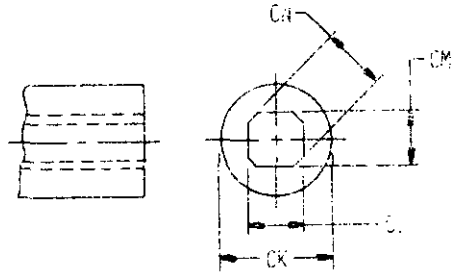

116-03-6

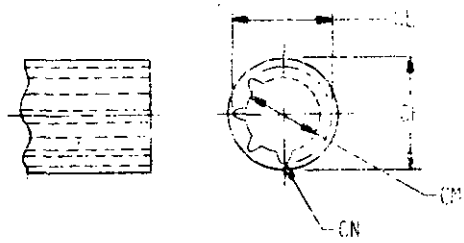


116-03-7

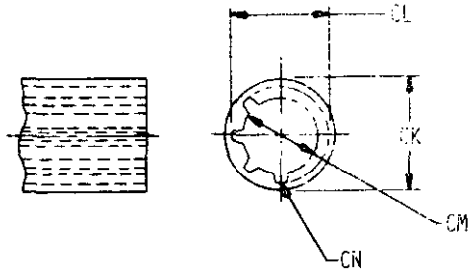


116-03-8


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

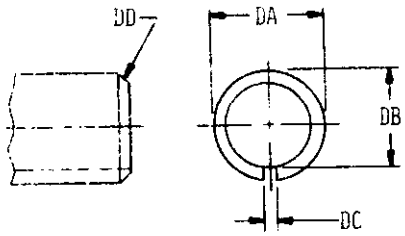

116-04-3

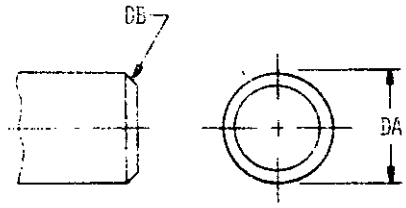


116-04-4

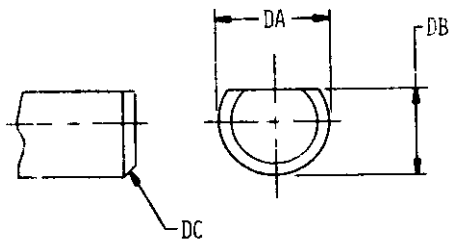


116-04-5


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

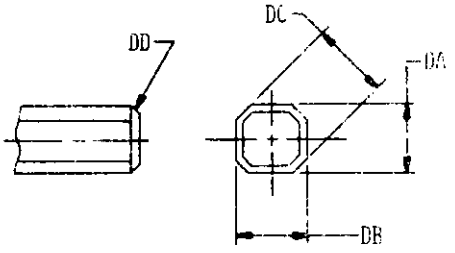

116-04-6

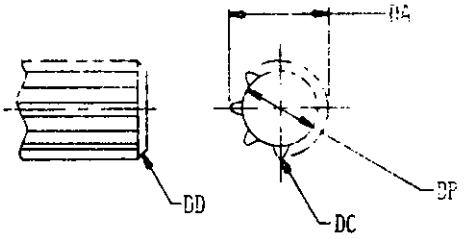


116-04-7

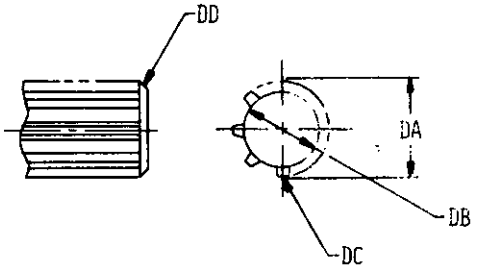


116-04-8


Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

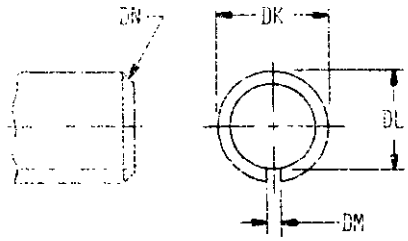

116-05-3

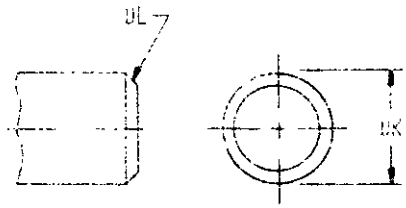


116-05-4

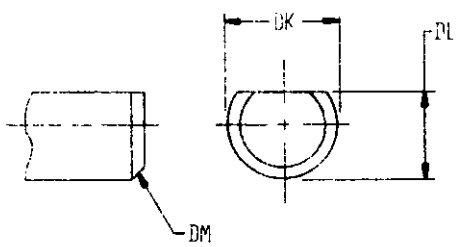


116-05-5


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

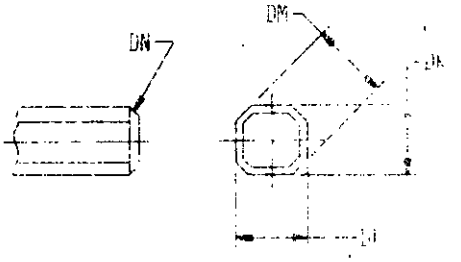

116-05-6

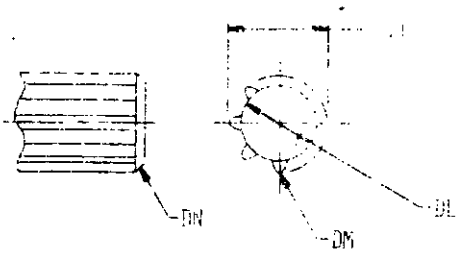

116-05-7

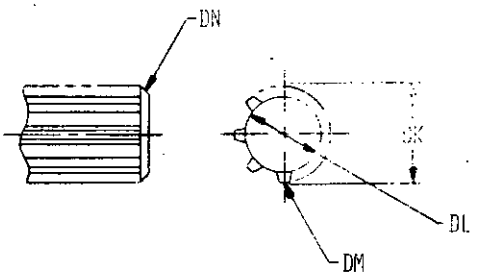

116-05-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	10	1646	20	1942	34	2110	42
0102	10	1648	20	1944	34	2122	40
0103	10	1650	20	1946	34	2124	42
0104	10	1652	20	1948	34	2126	42
0105	10	1730	20	1950	34	2160	48
0107	12	1732	22	1956	32	2162	48
0108	12	1734	22	1958	32	2202	50
0700	10	1736	22	1960	32	2206	50
0800	10	1738	22	1972	36	2208	50
1004	10	1802	26	1974	36	2210	50
1005	10	1806	26	1976	36	2212	50
1006	10	1808	26	1978	36	2214	50
1008	10	1810	26	1980	36	2222	48
1009	14	1812	26	1982	36	2224	50
1424	56	1814	26	1984	36	2226	50
1505	54	1822	24	1986	36	2242	52
1510	28	1824	24	1988	36	2246	52
1514	54	1842	26	1990	36	2248	52
1518	54	1844	26	1992	36	2262	50
1525	54	1846	26	1994	36	2264	52
1532	56	1858	26	1996	36	2266	52
1539	28	1860	26	1998	36	2282	52
1540	54	1872	30	2012	34	2286	52
1542	56	1876	30	2014	34	2288	54
1543	56	1878	30	2016	34	2290	54
1544	56	1880	30	2032	38	2292	54
1554	40	1882	30	2034	38	2294	54
1559	56	1884	30	2036	38	2312	52
1564	20	1894	30	2038	38	2314	52
1570	20	1896	30	2048	38	2400	14
1586	22	1898	30	2050	38	2402	14
1588	22	1922	32	2092	42	2500	23
1602	18	1926	32	2094	42	2501	23
1604	18	1928	32	2096	42	2502	23
1606	18	1930	32	2098	42	2503	23
1608	18	1932	32	2100	42	2504	23
1610	18	1934	32	2102	42	2505	23
1640	20	1936	32	2104	42	2506	23
1642	20	1938	32	2106	42	2507	23
1644	20	1940	34	2108	42	2508	23

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2509	23	2617	25	4800	40	6799	16
2510	23	2618	25	4801	28	6801	16
2511	23	2619	25	4815	38	6802	16
2512	23	2620	25	4840	28	6804	16
2513	23	2621	25	4871	38	6805	16
2514	23	2622	25	4872	28	6870	56
2515	23	2623	25	4895	28	6873	10
2516	23	2624	25	4916	40	6874	12
2517	23	2625	25	4950	14	6941	12
2518	23	2626	25	4953	28	6942	12
2519	23	2627	25	4956	28	6991	58
2520	23	2628	25	4998	44	6992	58
2521	23	2629	25	4999	44	6993	58
2522	23	2630	25	6245	44	6994	58
2523	23	2631	25	6246	44	6995	58
2524	23	2632	25	6247	44	6996	18
2525	23	2633	25	6248	44	6997	18
2526	23	2634	25	6299	28	6998	18
2527	23	2635	25	6327	46	6999	18
2528	23	2636	25	6334	40	7001	56
2529	23	2637	25	6335	40	7002	56
2530	23	2638	25	6336	40	7003	56
2531	23	2639	25	6337	40	7004	56
2600	25	4678	56	6338	46	7005	56
2601	25	4681	54	6339	46	7305	46
2602	25	4682	54	6340	46	7306	46
2603	25	4716	40	6341	46	7307	48
2604	25	4724	28	6342	46	7308	48
2605	25	4764	40	6343	48	7309	48
2606	25	4767	40	6344	48	7311	46
2607	25	4775	44	6345	48	7312	46
2608	25	4777	40	6346	48	7313	46
2609	25	4778	40	6347	48	7315	44
2610	25	4779	44	6348	48	7316	46
2611	25	4780	44	6349	48	7317	46
2612	25	4783	44	6369	10	7318	46
2613	25	4786	44	6372	58	7572	14
2614	25	4788	38	6794	16	7577	14
2615	25	4798	38	6796	16	7629	58
2616	25	4799	38	6797	16		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Additional Part Marking	58
Additional Requirements	56
Aperture Cards Required	12
Applicable Documents	58
Assembly Alignment	22
Axial Load	24
Backlash	26
Base Document	10
City, State, Zip	10
Classification	14
Company Name/Command	10
Configuration	14
Contract Number/Office Symbol	10
Control, Source	10
Control, Specification	12
Design and Construction	16
Dust	28
End Configuration	20
End Play	30
Endurance	32
Finishes	16
Format	10
Friction Torque	34
Government Design Activity FSCM	10
Hardness	38
Humidity	38
Illustrations	14
Lubricant Retention	40
Lubrication	20
Materials	14
Mounting Hardware	56

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Nomenclature	58
Notes	58
Packaging	58
Part Marking	58
Part Number	12
Part Number Cross-Reference	58
Phone Number	10
Quality Assurance Provisions	58
Requester's FSCM	10
Requester's Name	10
Revision of AEDPS Document (Number)	12
Salt Fog	44
Scope	12
Shock	44
Side Play	48
Source Table	12
Speed	20
Street/Building	10
Superseded Document	58
System Application	10
Tabulated Characteristics	14
Temperature	16
Tightness	50
Torque (Static)	22
Torque (Transmitted)	24
Torsional Play	52
Units of Measure	12
Vibration	54
Workmanship	56

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of MIL-STD-35-104A(MI), dated 31 August 1987 does not include the foldout pages for the Specification Requirement Sheet (SRS). For copies of these please call the ASSIST SERVICE DESK at 215-737-8000.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of MIL-STD-35-104A(MI), dated 31 August 1987 does not include the foldout pages for the Specification Requirement Sheet (SRS). For copies of these, please call the ASSIST SERVICE DESK at 215-737-8000.

81 182

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
U.S. Army Missile Command
ATTN: AMSMI-RD-SE-TD-ST
Redstone Arsenal, AL 35898-5276

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-STD-35-104A	

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.