MIL-STD-35-13A(MI)
7 SEPTEMBER 1983
SUPERSEDING
MIL-STD-35-13(MI)
15 OCTOBER 1973

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

SOLENOIDS

NO DELIVERABLE DATA
REQUIRED BY THIS DOCUMENT

AREA-EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF DEFENSE
Washington, DC 20301

Solenoids
Automated Engineering
Document Preparation System

MIL-STD-35-13A(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Command, ATTN: DRSMI-RSDC, Redstone Arsenal, Alabama 35898, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of MIL-STD-35-13A(MI) is to provide instructions for the preparation of Specifications Requirements Sheets (SRS) in order to produce Military Specification Exceptions for Solenoids.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedure described in the basic document (DOD-STD-35) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	3
	2.1	Issues of documents	3
	2.2	Other publications	4
	3.	DEFINITIONS	5
	4.	GENERAL REQUIREMENTS	7
	4.1	Introduction	7
	4.2	Specification Requirement Sheet (SRS)	7
	4.3	Configuration	7
	4.3.1	Dimensions	7
	4.3.2	Illustrations	7
	4.4	Units of measure	7
	5.	DETAILED REQUIREMENTS	8
	5.1	Introduction	8
	5.2	MSE Formats	8
	5.3	Referenced documents	8
	5.4	Tabulation	8
	5.5	Keyword Code Index (KCI) and Standard Paragraphs	11
	5.5.1	Interrelationship of Codes	11
	5.5.2	Automatic MSE Data	11
	5.5.3	DOD-STD-35 Tables	11

TABLES

Table	I.	Title Index	2
	II.	Tabulation candidates	9

APPENDIX

	Illustrations	121
	Characteristic Code Index	173
	Index	179

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS) provides detailed requirements for the preparation of Military Specifications Exception (MSE) documentation for Solenoids.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate a MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35.

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSEs for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desire title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on a SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for a MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title used the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
SOLENOID, ELECTRICAL	024001	MIL-S-4040	GENERAL SPECIFICATION
SOLENOID, ARMING	024002	MIL-S-4040	GENERAL SPECIFICATION
SOLENOID, FIRING	024003	MIL-S-4040	GENERAL SPECIFICATION
		MIL-S-12109	GUN, FIRING MECHANISM
SOLENOID, ROTARY STEPPING	024004	MIL-S-4040	GENERAL SPECIFICATION

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

2. REFERENCE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-S-4040	Solenoids, Electrical General Requirements
MIL-S-8805	Switches and Switch Assemblies, Sensitive, and Push (Snap Action), General Specification For
MIL-S-12109	Solenoid, Electrical, Gun Firing Mechanism

STANDARDS

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-810	Environmental Test Methods for Aerospace and Ground Equipment
MIL-STD-1285	Marking of Electrical and Electronic Parts

(Copies of specifications, standards, drawings, and publications required by contractor in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

2.2 Other publication. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTME380 Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, Pa. 19103.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Solenoids.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare a SRS for Solenoids, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desire MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Solenoids.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Solenoids.

4.3.2 Illustrations. Illustrations applicable to Solenoids are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table III provides codes for column heading which may be used for Solenoid characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either inches or millimeters.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE II. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1564	OPERATE VOLTS AC	1572	POWER DRAIN MAX WATTS	1574	PUSH FORCE MINIMUM POUNDS
1575	PULL FORCE MINIMUM POUNDS	1576	STARTING TORQUE MIN POUND-INCH	1581	CURRENT HOLD MAX AMPERES
1583	CURRENT OPER MAX AMPERES	1595	ACTUATE VOLTS MINIMUM	1596	DROP OUT VOLTS MINIMUM
1597	FREQUENCY HERTZ	1657	PLUNGER TRAVEL INCHES	1658	SIDE PLAY PLUNGER MAXIMUM INCHES
1660	OVER TRAV ARMATURE MAXIMUM INCHES	1661	UNDER TRAV PLUNGER MAXIMUM INCHES	2201	DUTY CYCLE PERCENT
2243	WIRE SIZE COIL A AWG	2244	WIRE SIZE COIL B AWG	2245	WIRE SIZE COIL C AWG
2952	OPERATE VOLTS DC	2960	LINEAR STROKE INCHES	2966	LINEAR STROKE MILLIMETER
2968	CLOCKWISE ROTATION DEGREES	2970	COUNTER CLOCKWISE ROTATION DEGREES	2986	WIRE SIZE COIL A METRIC DIA
2988	WIRE SIZE COIL B METRIC DIA	2990	WIRE SIZE COIL C METRIC DIA	3012	OVER TRAV PLUNGER MAXIMUM INCHES
3018	PLUNGER TRAVEL MILLIMETER	3020	OVER TRAV PLUNGER MAXIMUM MILLIMETER	3022	UNDER TRAV PLUNGER MAXIMUM MILLIMETER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE II. TABULATION CANDIDATES. (CONT.)

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
3024	SIDE PLAY ARMATURE MAXIMUM INCHES	3026	SIDE PLAY PLUNGER MAXIMUM MILLIMETER	3030	UNDER TRAV ARMATURE MAXIMUM INCHES
3037	OVER TRAV ARMATURE MAXIMUM MILLIMETER	3034	UNDER TRAV ARMATURE MAXIMUM MILLIMETER	3040	SIDE PLAY ARMATURE MAXIMUM MILLIMETER
3046	PUSH FORCE MINIMUM NEWTONS	3048	PULL FORCE MINIMUM NEWTONS	3050	PUSH FORCE MAXIMUM POUNDS
3052	PUSH FORCE MAXIMUM NEWTONS	3054	PULL FORCE MAXIMUM POUNDS	3056	PULL FORCE MAXIMUM NEWTONS
3070	STARTING TORQUE MIN N/M	3080	STATIC RET FORCE MAX POUNDS	3082	STATIC RET FORCE MAX NEWTONS
3084	STATIC RET FORCE MIN POUNDS	3086	STATIC RET FORCE MIN NEWTONS	3090	STATIC RET TORQUE MAX LB/IN
3092	STATIC RET TORQUE MAX N/M	3094	STATIC RET TORQUE MIN LB/IN	3096	STATIC RET TORQUE MIN N/M

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

5.5 Keyword Code Index (KCI) and Standard Paragraph. The KCI provides codes, to be entered on a SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics ahve been specified refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.5.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic name on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.5.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to made additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.5.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT.	0700
ONE SECTION DOCUMENT.	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1004	USER FSCM 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT NUMBER	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6874	THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).
0107	
0108	0108. SCOPE. SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.
	PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.
	PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.
6941	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
UNITS OF MEASURE (CONT)	
SI.	6942
ALTITUDE	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	6790
SEA LEVEL TO (METERS)	6791
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	6792
SEA LEVEL TO (METERS)	6793
TEMPERATURE	
MAXIMUM OPERATING (DEGREES CELSIUS)	6794
MAXIMUM STORAGE (DEGREES CELSIUS)	6796
MINIMUM OPERATING (DEGREES CELSIUS)	6799
MINIMUM STORAGE (DEGREES CELSIUS)	6801

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6942	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES.
6790	OPERATING ALTITUDE. THE OPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6790 FEET.
6791	OPERATING ALTITUDE. THE OPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6791 METERS.
6792	NONOPERATING ALTITUDE. THE NONOPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6792 FEET.
6793	NONOPERATING ALTITUDE. THE NONOPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6793 METERS.
6794	MAXIMUM OPERATING TEMPERATURE. THE OPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6794 DEGREES CELSIUS.
6796	MAXIMUM STORAGE TEMPERATURE. THE STOREAGE TEMPERATURE SHALL BE NOT GREATER THAN 6796 DEGREES CELSIUS.
6799	MINIMUM OPERATING TEMPERATURE. THE OPERATING TEMPERATURE SHALL BE NOT LESS THAN 6799 DEGREES CELSIUS.
6801	MINIMUM STORAGE TEMPERATURE. THE STORAGE TEMPERATURE SHALL BE NOT LESS THAN 6801 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
DIMENSION TABLE, (SEE TABLE III, DOD-STD-35)	
*UNITS (SELECT ONE)	
(INCHES)	7572
(MILLIMETERS)	7577
ELECTRICAL RATINGS	
VOLTAGE	
OPERATING VOLTAGE	
*MINIMUM (VOLTS)	1565
*MAXIMUM (VOLTS)	1566
NOMINAL VOLTAGE (VOLTS)	1564
MINIMUM ACTUATE VOLTAGE (VOLTS)	1595
MINIMUM DROPOUT VOLTAGE (VOLTS)	1596
TRANSIENT SUPPRESSION (DC VOLTS)	1620

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

CONFIGURATION.

1009 CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.

7572 ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.

7577 ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.

ELECTRICAL RATINGS.

VOLTAGE.

1565 VOLTAGE, OPERATING. THE SOLENOID SHALL BE DESIGNED TO
1566 OPERATE OVER A VOLTAGE RANGE OF 1565 VOLT(S) TO 1566 VOLT(S).

1564 VOLTAGE, OPERATIONAL. THE SOLENOID SHALL BE DESIGNED FOR A NOMINAL OPERATING VOLTAGE OF 1564 VOLT(S).

1595 VOLTAGE, ACTUATE. THE SOLENOID SHALL HAVE A MINIMUM ACTUATE VOLTAGE OF 1595 VOLT(S).

1596 VOLTAGE, DROPOUT. THE SOLENOID SHALL HAVE A MINIMUM DROPOUT VOLTAGE OF 1596 VOLT(S).

1620 TRANSIENT SUPPRESSION. THE SOLENOID SHALL HAVE PROVISIONS TO WITHSTAND 1620 PEAK INVERSE VOLTS DC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELECTRIC RATINGS (CONT)	
VOLTAGE (CONT)	
TRANSIENT SUPPRESSION (AC VOLTS)	1621
CURRENT	
MAXIMUM POWER DRAIN (WATTS)	1572
MAXIMUM HOLDING CURRENT (AMPERES)	1581
MAXIMUM OPERATING CURRENT (AMPERES)	1583
FREQUENCY	
NOMINAL FREQUENCY (HERTZ)	1597
FREQUENCY RANGE	
*MINIMUM (HERTZ)	1598
*MAXIMUM (HERTZ)	1599
DC VOLTAGE RANGE	
*MINIMUM (VOLTS DC)	2948
*MAXIMUM (VOLTS DC)	2950
NOMINAL DC VOLTAGE (VOLTS DC)	2952

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1621	TRANSIENT SUPPRESSION. THE SOLENOID SHALL HAVE PROVISIONS TO WITHSTAND 1621 PEAK VOLTS AC.
	CURRENT.
1572	THE MAXIMUM POWER DRAIN OF THE SOLENOID SHALL BE 1572 WATT(S).
1581	THE HOLDING CURRENT SHALL BE NOT GREATER THAN 1581 AMPERE(S).
1583	THE OPERATING CURRENT SHALL BE NOT GREATER THAN 1583 AMPERE(S).
	FREQUENCY.
1597	THE SOLENOID SHALL BE DESIGNED TO OPERATE ON A NOMINAL FREQUENCY OF 1597 HERTZ.
1598 1599	THE SOLENOID SHALL BE DESIGNED TO OPERATE OVER A FREQUENCY RANGE OF 1598 HERTZ TO 1599 HERTZ.
2948 2950	THE SOLENOID SHALL BE DESIGNED TO OPERATE ON A DC VOLTAGE OF 2948 VOLT(S) TO 2950 VOLT(S).
2952	THE SOLENOID SHALL BE DESIGNED TO OPERATE ON A NOMINAL DC VOLTAGE OF 2952 VOLT(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELECTRIC RATINGS (CONT)	
DUTY CYCLE	
PERCENTAGE (PERCENT)	2201
(RATE)	2956
MAGNETIC FIELD EFFECT	
FIELD CORE FIELD STRENGTH (WEBERS)	1600
FIELD CORE FIELD DENSITY (TESLA)	1643
PLUNGER OR ARMATURE FREQUENCY (HERTZ)	1642
PLUNGER OR ARMATURE, FIELD STRENGTH (WEBERS)	2958
PLUNGER ARMATURE, FIELD DENSITY (TESLA)	1671
DESIGN AND CONSTRUCTION	
TYPE (SELECT ONE)	
PUSH TYPE.	2962
PULL TYPE.	2964
LINEAR STROKE (SELECT ONE)	
(INCHES)	2960
(MILLIMETERS)	2966

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	DUTY CYCLE.
2201	DUTY CYCLE SHALL BE 2201 PERCENT.
2956	CYCLING RATE SHALL BE 2956.
	MAGNETIC FIELD EFFECT.
1600	WITHIN THE FIELD CORE PERMEABILITY, THE FIELD STRENGTH SHALL BE 1600 WEBER.
1643	WITHIN THE FIELD CORE PERMEABILITY, THE FIELD DENSITY SHALL BE 1643 TESLA.
1642	WITHIN THE PLUNGER OR ARMATURE PERMEABILITY, THE FREQUENCY SHALL BE 1642 HERTZ.
2958	WITHIN THE PLUNGER OR ARMATURE PERMEABILITY, THE FIELD STRENGTH SHALL BE 2958 WEBER.
1671	WITHIN THE PLUNGER OR ARMATURE PERMEABILITY, THE FIELD DENSITY SHALL BE 1671 TESLA.
	DESIGN AND CONSTRUCTION.
2962	THE SOLENOID SHALL BE OF THE PUSH TYPE.
2964	THE SOLENOID SHALL BE OF THE PULL TYPE.
2960	THE SOLENOID SHALL HAVE A LINEAR STROKE OF 2960 INCH(S).
2966	THE SOLENOID SHALL HAVE A LINEAR STROKE OF 2966 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
CLOCKWISE ROTATION (DEGREES)	2968
COUNTER CLOCKWISE ROTATION (DEGREES)	2970
LAMINATED	1637
ONE PIECE CONSTRUCTION.	1638
DUTY	
CONTINUOUS OPERATION.	2974
INTERMITTENT OPERATION.	2976
DUTY FUNCTION _____	2978
COILS	
TYPE WINDING (TYPE)	2982
MAGNETIC WIRE	
COIL A (SELECT ONE)	
(AWG)	2243
(MILLIMETER DIAMETER)	2986
COIL B (SELECT ONE)	
(AWG)	2244
(MILLIMETER DIAMETER)	2988

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2968	THE SOLENOID SHALL HAVE A CLOCKWISE ROTATION OF 2968 DEGREES.
2970	THE SOLENOID SHALL HAVE A COUNTER CLOCKWISE ROTATION OF 2970 DEGREES.
1637	THE FIELD CORE SHALL BE OF 1637 GUAGE LAMINATIONS.
1638	THE FIELD CORE SHALL BE OF ONE PIECE CONSTRUCTION.
	DUTY.
2974	THE DUTY FUNCTION SHALL BE CONTINUOUS OPERATION.
2976	THE DUTY FUNCTION SHALL BE INTERMITTENT OPERATION.
2978	THE DUTY FUNCTION SHALL BE 2978.
	COILS.
2982	THE COILS SHALL BE 2982 TYPE OF WINDING.
2243	THE MAGNET WIRE SIZE FOR COIL A SHALL BE 2243 AWG.
2986	THE MAGNET WIRE SIZE FOR COIL A SHALL BE 2986 MILLIMETER DIAMETER.
2244	THE MAGNET WIRE SIZE FOR COIL B SHALL BE 2244 AWG.
2988	THE MAGNETIC WIRE SIZE FOR COIL B SHALL BE 2988 MILLIMETER DIAMETER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
MAGNET WIRE (CONT)	
COIL C (SELECT ONE)	
(AWG)	2245
(MILLIMETER DIAMETER)	2290
TERMINATION	
TERMINATION NUMBERS AND LOCATION (DOC DES)	2994
COLOR OF WIRE LEADS (COLOR)	2996
CONNECTOR.	1729
CONNECTOR (DOC DES)	1731
SNAP ACTION SWITCHS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT _____	2998
PER MIL-S-8805.	1622
PER MIL-S-8805, EXCEPT _____	1624
CASE	
PER BASE DOCUMENT, EXCEPT _____	3002

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2245	THE MAGNET WIRE SIZE FOR COIL C SHALL BE 2245 AWG.
2290	THE MAGNET WIRE SIZE FOR COIL C SHALL BE 2290 MILLIMETER DIAMETER.
	TERMINATION.
2994	TERMINAL NUMBER(S) AND LOCATION SHALL BE IN ACCORDANCE WITH 2994.
2996	THE COLOR OF WIRE LEAD TERMINAL(S) SHALL BE IN ACCORDANCE WITH 2996.
1729	THE SOLENOID TERMINATION SHALL BE A CONNECTOR.
1731	THE CONNECTOR SHALL BE IN ACCORDANCE WITH 1731.
	SNAP ACTION SWITCHS.
2998	ACTION SWITCH(S) SHALL CONFORM TO BASE DOCUMENT, EXCEPT 2298.
1622	SNAP ACTION SWITCH(S) SHALL BE IN ACCORDANCE WITH MIL-S-8805.
1624	SNAP ACTION SWITCH(S) SHALL BE IN ACCORDANCE WITH MIL-S-8805, EXCEPT 1624.
	CASE.
3002	CASE SHALL BE IN ACCORDANCE WITH BASE DOCUMENT, EXCEPT 3002.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
MOUNTINGS (SELECT ONE)	
PER ILLUSTRATION (NUMBER)	3006
PER BASE DOCUMENT, EXCEPT _____	3008
SPECIAL MOUNTING _____	3010
WEIGHT	
MAXIMUM WEIGHT/MASS PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024
MINIMUM WEIGHT/MASS PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	6943

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	MOUNTINGS.
3006	MOUNTING SHALL BE IN ACCORDANCE WITH ILLUSTRATION NUMBER 3006.
3008	MOUNTING SHALL BE IN ACCORDANCE WITH BASE DOCUMENT, EXCEPT 3008.
3010	SPECIAL MOUNTING INSTRUCTIONS SHALL BE 3010.
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7023	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT NOT GREATER THAN 7023 POUND(S).
7021	MAXIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	MAXIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).
6943	MINIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT LESS THAN 6943 OUNCE(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
U.S. (CONT)	
(POUNDS)	6944
SI (SELECT ONE)	
(GRAMS)	6945
(KILOGRAMS)	6946
OPERATING CHARACTERISTICS	
ENERGIZE STROKE (SELECT ONE)	
(INCHES)	1630
(MILLIMETERS)	3014
PLUNGER TRAVEL	
TRAVEL (SELECT ONE)	
(INCHES)	1657
(MILLIMETERS)	3018

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE | STANDARD PARAGRAPH

6944 MINIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT LESS THAN 6944 POUND(S).

6945 MINIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT LESS THAN 6945 GRAM(S).

6946 MINIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT LESS THAN 6946 KILOGRAM(S).

OPERATING CHARACTERISTIC.

ENERGIZE STROKE.

1630 THE SOLENOID SHALL HAVE A PULL IN COIL THAT WILL ENERGIZE BEFORE THE FINAL 1630 INCH(S) OF THE STROKE.

3014 THE SOLENOID SHALL HAVE A PULL IN COIL THAT WILL ENERGIZE BEFORE THE FINAL 3014 MILLIMETER(S) OF THE STROKE.

PLUNGER TRAVEL.

1657 THE TRAVEL OF THE PLUNGER SHALL BE NOT GREATER THAN 1657 INCH(S).

3018 THE TRAVEL OF THE PLUNGER SHALL BE NOT GREATER THAN 3018 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OPERATING CHARACTERISTICS (CONT)	
ARMATURE TRAVEL	
OVER TRAVEL (SELECT ONE)	
(INCHES)	1660
(MILLIMETERS)	3032
UNDER TRAVEL (SELECT ONE)	
(INCHES)	3030
(MILLIMETERS)	3034
ARMATURE PLAY	
LATERAL PLAY (SELECT ONE)	
(INCHES)	3036
(MILLIMETERS)	3038
SIDE PLAY (SELECT ONE)	
(INCHES)	3024
(MILLIMETERS)	3040

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

ARMATURE TRAVEL.

1660 THE OVER TRAVEL OF THE ARMATURE SHALL BE NOT GREATER THAN 1660 INCH(S).

3032 THE OVER TRAVEL OF THE ARMATURE SHALL BE NOT GREATER THAN 3032 MILLIMETER(S).

3030 THE UNDER TRAVEL OF THE ARMATURE SHALL BE NOT GREATER THAN 3030 INCH(S).

3034 THE UNDER TRAVEL OF THE ARMATURE SHALL BE NOT GREATER THAN 3034 MILLIMETER(S).

ARMATURE PLAY.

3036 THE LATERAL PLAY OF THE ARMATURE SHALL BE NOT GREATER THAN 3036 INCH(S).

3038 THE LATERAL PLAY OF THE ARMATURE SHALL BE NOT GREATER THAN 3038 MILLIMETER(S).

3024 THE SIDE PLAY OF THE ARMATURE SHALL BE NOT GREATER THAN 3024 INCH(S).

3040 THE SIDE PLAY OF THE ARMATURE SHALL BE NOT GREATER THAN 3040 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OPERATING CHARACTERISTICS (CONT)	
OPERATING FORCE	
PUSH FORCE (SELECT ONE)	
MINIMUM (POUNDS)	1574
MINIMUM (NEWTONS)	3046
PULL FORCE (SELECT ONE)	
MINIMUM (POUNDS)	1575
MINIMUM (NEWTONS)	3048
PUSH FORCE (SELECT ONE)	
MAXIMUM (POUNDS)	3050
MAXIMUM (NEWTONS)	3052
PULL FORCE (SELECT ONE)	
MAXIMUM (POUNDS)	3054
MAXIMUM (NEWTONS)	3056
LINEAR FORCE REQUIREMENT _____	3058

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the currentversion before use.

CHAR
CODE STANDARD PARAGRAPH

OPERATING FORCE.

1574 THE SOLENOID SHALL HAVE A MINIMUM PUSH FORCE OF 1574 POUND(S).

3046 THE SOLENOID SHALL HAVE A MINIMUM PUSH FORCE OF 3046 NEWTON(S).

1575 THE SOLENOID SHALL HAVE A MINIMUM PULL FORCE OF 1575 POUND(S).

3048 THE SOLENOID SHALL HAVE A MINIMUM PULL FORCE OF 3048 NEWTON(S).

3050 THE SOLENOID SHALL HAVE A MAXIMUM PUSH FORCE OF 3050 POUND(S).

3052 THE SOLENOID SHALL HAVE A MAXIMUM PUSH FORCE OF 3052 NEWTON(S).

3054 THE SOLENOID SHALL HAVE A MAXIMUM PULL FORCE OF 3054 POUND(S).

3056 THE SOLENOID SHALL HAVE A MAXIMUM PULL FORCE OF 3056 NEWTON(S).

3058 THE SOLENOID SHALL HAVE A LINEAR FORCE REQUIREMENT OF 3058.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OPERATING CHARACTERISTICS (CONT)	
PLUNGER TRAVEL (CONT)	
OVER TRAVEL (SELECT ONE)	
(INCHES)	3012
(MILLIMETERS)	3020
UNDER TRAVEL (SELECT ONE)	
(INCHES)	1661
(MILLIMETERS)	3022
PLUNGER PLAY	
SIDE PLAY (SELECT ONE)	
(INCHES)	1658
(MILLIMETERS)	3026
ROTATIONAL PLAY (SELECT ONE)	
(INCHES)	1659
(MILLIMETERS)	3028

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3012	THE OVER TRAVEL OF THE PLUNGER SHALL BE NOT GREATER THAN 3012 INCH(S).
3020	THE OVER TRAVEL OF THE PLUNGER SHALL BE NOT GREATER THAN 3020 MILLIMETER(S).
1661	THE UNDER TRAVEL OF THE PLUNGER SHALL BE NOT GREATER THAN 1661 INCH(S).
3022	THE UNDER TRAVEL OF THE PLUNGER SHALL BE NOT GREATER THAN 3022 MILLIMETER(S).
1658	THE SIDE PLAY OF THE PLUNGER SHALL BE NOT GREATER THAN 1658 INCH(S).
3026	THE SIDE PLAY OF THE PLUNGER SHALL BE NOT GREATER THAN 3026 MILLIMETER(S).
1659	THE ROTATIONAL PLAY OF THE PLUNGER SHALL BE NOT GREATER THAN 1659 INCH(S).
3028	THE ROTATIONAL PLAY OF THE PLUNGER SHALL BE NOT GREATER THAN 3028 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OPERATING CHARACTERISTICS (CONT)	
OPERATING TORQUE	
MINIMUM ROTATIONAL (SELECT ONE)	
(POUND-INCH)	3062
(NEWTON-METER)	3064
MAXIMUM ROTATIONAL (SELECT ONE)	
(POUND-INCH)	3066
(NEWTON-METER)	3068
MINIMUM STARTING (SELECT ONE)	
(POUND-INCH)	1576
(NEWTON-METER)	3070
MINIMUM HOLDING (SELECT ONE)	
(POUND-INCH)	3072
(NEWTON-METER)	3074

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	OPERATING TORQUE.
3062	THE SOLENOID SHALL HAVE A MINIMUM ROTATIONAL TORQUE OF 3062 POUND-INCH.
3064	THE SOLENOID SHALL HAVE A MINIMUM ROTATIONAL TORQUE OF 3064 NEWTON-METER.
3066	THE SOLENOID SHALL HAVE A MAXIMUM ROTATIONAL TORQUE OF 3066 POUND-INCH.
3068	THE SOLENOID SHALL HAVE A MAXIMUM ROTATIONAL TORQUE OF 3068 NEWTON-METER.
1576	THE SOLENOID SHALL HAVE A MINIMUM STARTING TORQUE OF 1576 POUND-INCH.
3070	THE SOLENOID SHALL HAVE A MINIMUM STARTING TORQUE OF 3070 NEWTON-METER.
3072	THE SOLENOID SHALL HAVE A MINIMUM HOLDING TORQUE OF 3072 POUND-INCH.
3074	THE SOLENOID SHALL HAVE A MINIMUM HOLDING TORQUE OF 3074 NEWTON-METER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OPERATING CHARACTERISTICS (CONT)	
OPERATING TORQUE (CONT)	
TORQUE REQUIREMENT _____	3076
STATIC SPRING RETURN FORCE	
MAXIMUM STATIC RETURN (SELECT ONE)	
(POUNDS)	3080
(NEWTONS)	3082
MINIMUM STATIC RETURN (SELECT ONE)	
(POUNDS)	3084
(NEWTONS)	3086
STATIC SPRING RETURN TORQUE	
MAXIMUM STATIC RETURN (SELECT ONE)	
(POUND-INCH)	3090
(NEWTON-METER)	3092
MINIMUM STATIC RETURN (SELECT ONE)	
(POUND-INCH)	3094
(NEWTON-METER)	3096

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

3076 THE SOLENOID SHALL HAVE A ROTATIONAL TORQUE REQUIREMENT OF 3076.

STATIC SPRING RETURN FORCE.

3080 THE MAXIMUM STATIC RETURN FORCE SHALL BE 3080 POUND(S).

3082 THE MAXIMUM STATIC RETURN FORCE SHALL BE 3082 NEWTON(S).

3084 THE MINIMUM STATIC RETURN FORCE SHALL BE 3084 POUND(S).

3086 THE MINIMUM STATIC RETURN FORCE SHALL BE 3086 NEWTON(S).

STATIC SPRING RETURN TORQUE.

3090 THE MAXIMUM STATIC RETURN TORQUE SHALL BE 3090 POUND-INCH.

3092 THE MAXIMUM STATIC RETURN TORQUE SHALL BE 3092 NEWTON-METER.

3094 THE MINIMUM STATIC RETURN TORQUE SHALL BE 3094 POUND-INCH.

3096 THE MINIMUM STATIC RETURN TORQUE SHALL BE 3096 NEWTON-METER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	6272
NO EVIDENCE OF PHYSICAL DAMAGE.	6273
NO DISCONTINUITY.	7345
MAXIMUM CHANGE IN TORQUE (PERCENT)	3104
MAXIMUM CHANGE IN FORCE (PERCENT)	3106
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	6250
PER MIL-STD-202, METHOD 212.	6251
*TEST CONDITION LETTER (SELECT ONE)	
TEST CONDITION LETTER A.	6226
*LEVEL (SELECT ONE)	
20 G'S.	4863
50 G'S.	4864
100 G'S.	4865

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6272	ACCELERATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6272.
6273	ACCELERATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
7345	THERE SHALL BE NO ELECTRICAL DISCONTINUITY DURING THE TEST.
3104	THE CHANGE IN TORQUE SHALL BE NOT GREATER THAN 3104 PERCENT.
3106	THE CHANGE IN FORCE SHALL BE NOT GREATER THAN 3106 PERCENT.
6250	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6250.
6251	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 212 OF MIL-STD-202.
6226	TEST CONDITION LETTER A SHALL APPLY.
4863	THE TEST LEVEL SHALL BE 20 G'S.
4864	THE TEST LEVEL SHALL BE 50 G'S.
4865	THE TEST LEVEL SHALL BE 100 G'S.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATION (CONT)	
TEST CONDITION LETTER (CONT)	
TEST CONDITION LETTER B.	6233
*LEVEL (SELECT ONE)	
10,000 G'S.	4868
20,000 G'S.	4892
DIRECTION (SELECT ONE)	
ONE DIRECTION.	1557
BOTH DIRECTIONS.	1558
TEST CONDITION LETTER C.	6239
*LEVEL (G'S.)	4893
MOUNTING (SELECT ONE)	
MOUNT BY ANY SUITABLE METHOD.	6263
MOUNT BY NORMAL METHOD.	6264
MOUNT PER DOCUMENT (DOC DES)	6265
PERCENT RATED LOAD APPLIED (PERCENT)	6210
MONITOR PER METHOD 310 OF MIL-STD-202	
*TEST CIRCUIT (LETTER)	1548

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6233	TEST CONDITION LETTER B SHALL APPLY.
4868	THE TEST LEVEL SHALL BE 10,000 G'S.
4892	THE TEST LEVEL SHALL BE 20,000 G'S.
1557	THE SPECIMEN SHALL BE ACCELERATED IN ONE DIRECTION ONLY.
1558	THE SPECIMEN SHALL BE ACCELERATED IN BOTH DIRECTIONS.
6239	TEST CONDITION LETTER C SHALL APPLY.
4893	THE TEST LEVEL SAHLL BE 4893 G'S.
6263	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
6264	MOUNTING SHALL BE BY THE NORMAL METHOD.
6265	MOUNTING SHALL BE IN ACCORDANCE WITH 6265.
6210	THE ELECTRICAL LOAD SHALL BE 6210 PERCENT OF THE RATED LOAD.
1548	MONITORING DURING THE TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1548 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATION (CONT)	
MONITOR PER METHOD 310 OF MIL-STD-202 (CONT)	
*TEST CONDITION (LETTER)	1549
MONITOR OPERATIONAL TORQUE.	3148
MONITOR OPERATIONAL FORCE.	3150
DC RESISTANCE	
REQUIREMENTS	
PER BASE DOCUMENT, EXCEPT _____	4051
RESISTANCE (OHMS)	4060
MAXIMUM (PERCENT)	4062
MINIMUM (PERCENT)	4063
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT _____	3136
PER MIL-STD-202, METHOD 303.	3138
LIMIT OF ERROR (PERCENTAGE)	3140

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1549	TEST CONDITION LETTER 1549 IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202 SHALL APPLY.
3148	DURING THE TEST, OPERATING TORQUE SHALL BE MONITORED.
3150	DURING THE TEST, OPERATING FORCE SHALL BE MONITORED.
	DC RESISTANCE.
4051	DC RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4051.
4060	DC RESISTANCE. DC RESISTANCE SHALL BE 4060 OHMS.
4062	THE DC RESISTANCE SHALL BE NOT GREATER THAN THE NOMINAL RESISTANCE PLUS 4062 PERCENT.
4063	THE DC RESISTANCE SHALL BE NOT LESS THAN THE NOMINAL RESISTANCE MINUS 4063 PERCENT.
3136	DC RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3136.
3138	DC RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 303, MIL-STD-202.
3140	DC RESISTANCE. THE LIMIT OF ERROR OF THE MEASURING APPARATUS SHALL BE 3140 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4908
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4906
MAXIMUM LEAKAGE (MILLIAMPERES)	4894
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4884
PER MIL-STD-202, METHOD 301.	6300
*ALTITUDE PER METHOD 105 OF MIL-STD-202	
*TEST CONDITION (LETTER)	4886
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4885
(VOLTS, AC)	4849

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4908	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4908.
4906	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4894	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4894 MILLIAMPERE(S).
4884	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4884.
6300	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.
4886	ALTITUDE SHALL BE IN ACCORDANCE WITH TEST CONDITION LETTER 4886 OF METHOD 105 OF MIL-STD-202.
4885	TEST VOLTAGE SHALL BE 4885 VOLTS, DC.
4849	TEST VOLTAGE SHALL BE 4849 VOLTS, AC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	6311
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	6312
BETWEEN MUTUALLY INSULATED PARTS.	6292
BETWEEN ALL INSULATED PARTS AND GROUND.	6293
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	6294
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4859
DURATION OF VOLTAGE APPLICATION (SECONDS)	4891
MOUNTING PER DOCUMENT (DOC DES)	6280
REGULATION OF TEST VOLTAGE (PERCENT)	6308
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4900

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
6311	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
6312	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
6292	BETWEEN MUTUALLY INSULATED PARTS.
6293	BETWEEN ALL INSULATED PARTS AND GROUND.
6294	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
4859	SPECIAL PREPARATION SHALL BE IN ACCORDANCE WITH 4859.
4891	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4891 SECOND(S).
6280	MOUNTING SHALL BE IN ACCORDANCE WITH 6280.
6308	REGULATION OF THE TEST VOLTAGE SHALL BE WITHIN 6308 PERCENT.
4900	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS TAHN 4900 KILOVOLTAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4902
(MILLIAMPERES)	6310
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4874
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4856
MAXIMUM LEAKAGE (MILLIAMPERES)	4875
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4861
PER MIL-STD-202, METHOD 301.	4862

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4902	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4902 AMPERE(S).
6310	THE SURGE CURRENT SHALL BE NOT GREATER THAN 6310 MILLIAMPERE(S).
4874	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.
4856	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4875	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4875 MILLIAMPERE(S).
4861	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861.
4862	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4854
(VOLTS, AC)	4855
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	4842
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	4848
BETWEEN MUTUALLY INSULATED PARTS.	4844
BETWEEN ALL INSULAGED PARTS AND GROUND.	4845
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	4846
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4850
DURATION OF VOLTAGE APPLICATION (SECONDS)	4867
MOUNTING PER DOCUMENT (DOC DES)	5000
REGULATION OF TEST VOLTAGE (PERCENT)	4869

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4854	TEST VOLTAGE SHALL BE 4854 VOLTS, DC.
4855	TEST VOLTAGE SHALL BE 4855 VOLTS, AC.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
4842	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
4848	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
4844	BETWEEN MUTUALLY INSUALTED PARTS.
4845	BETWEEN ALL INSULATED PARTS AND GROUND.
4846	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
4850	SPECIAL PREPARATION OR CONDITIONS SHALL BE IN ACCORDANCE WITH 4850.
4867	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4867 SECOND(S).
5000	MOUNTING SHALL BE IN ACCORDANCE WITH 5000.
4869	REGULATION OF TEST VOLTAGE SHALL BE WITHIN 4869 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4870
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4717
(MILLIAMPERES) .	4897
METHOD OF VOLTAGE CONNECTION PER DOCUMENT (DOC DES)	6267
EXPLOSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT _____	4022
NO EXPLOSION.	3100
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT, EXPECT _____	2980
PER MIL-STD-202, METHOD 109.	3144
TEST TEMPERATURE (DEGREES CELSIUS)	3146

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4870	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4870 KILOFOLTAMPERE(S).
4717	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4717 AMPERE(S).
4897	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4897 MILLIAMPERE(S).
6267	METHOD OF CONNECTION OF TEST VOLTAGE SHALL BE IN ACCORDANCE WITH 6267.
	EXPLOSION.
4022	EXPLOSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4022.
3100	EXPLOSION. THERE SHALL BE NO EXPLOSION.
2980	EXPLOSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2980.
3144	EXPLOSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 109, MIL-STD-202.
3146	THE TEST CHAMBER TEMPERATURE SHALL BE 3146 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1380
AS FOLLOWS:	6359
*MINIMUM INSULATION RESISTANCE (SELECT ONE)	
SINGLE TEST	
(MEGOHMS)	1386
MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	1384
*SECOND TEST (MEGOHMS)	1387
NO EVIDENCE OF PHYSICAL DAMAGE.	1407
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1371
PER MIL-STD-202, METHOD 302.	1511

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1380	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.
6359	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1386	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1386 MEGOHM(S).
1384	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1384 MEGOHM(S) AT THE FIRST TEST TEMEPATURE.
1387	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1387 MEGOHM(S) AT THE SECOND TEST TEMPERATURE.
1407	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1371	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.
1511	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 302 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 302. (CONT)	
*CONDITION (SELECT ONE)	
TEST CONDITION (LETTER)	1378
TEST VOLTAGE (VOLTS, DC)	1373
ELECTRIFICATION TIME (SECONDS)	1376
MAXIMUM MEASUREMENT ERROR AT REQUIRED VALUE (PERCENT)	1377
POINTS OF MEASUREMENT:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	1497
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	1498
BETWEEN MUTUALLY INSULATED PARTS.	1522
BETWEEN INSULATED PARTS AND GROUND.	1523
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	1524

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1378	TEST CONDITION LETTER 1378 SHALL APPLY.
1373	TEST POTENTIAL SHALL BE 1373 VOLTS, DC.
1376	ELECTRIFICATION DURATION SHALL BE 1376 SECOND(S).
1377	THE MEASUREMENT ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1377 PERCENT.
	POINTS OF INSULATION RESISTANCE OF MEASUREMENT SHALL BE AS FOLLOWS:
1497	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
1498	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
1522	BETWEEN MUTUALLY INSULATED PARTS.
1523	BETWEEN ALL INSULATED PARTS AND GROUND.
1524	BETWEEN CURRENT CARRYING PARTS AND THE CASE.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 302. (CONT)	
SPECIAL PREPARATIONS OR CONDITIONS PER DOCUMENT (DOC DES)	1520
FIRST TEST TEMPERATURE (DEGREES CELSIUS)	1372
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	1381
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1383
MOISTURE RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1400
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	1396
NO EVIDENCE OR ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1394
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	1429
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	1404

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1520	SPECIAL PREPARATIONS OR CONDITIONS SHALL BE IN ACCORDANCE WITH 1520.
1372	FIRST TEST TEMPERATURE SHALL BE 1372 DEGREES CELSIUS.
1381	SECOND TEST TEMPERATURE SHALL BE 1381 DEGREES CELSIUS.
1383	TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1383 DEGREES CELSIUS.
1400	MOISTURE RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1400.
1396	MOISTURE RESISTANCE. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
1394	THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING OR INSULATION BREAKDOWN, WHEN DIELECTRIC WITHSTANDING VOLTAGE IS APPLIED.
1429	CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1429 MILLIAMPERE(S) AT HIGH HUMIDITY.
1404	CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1404 (MILLIAMPERE(S) AFTER DRYING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE (CONT)	
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE. (CONT)	
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	1432
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	1406
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1391
PER MIL-STD-202, METHOD 106.	1397
POLARIZING VOLTAGE (VOLTS, DC)	1395
LOADING VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4981
(VOLTS, AC)	4980
PERCENT OF SAMPLE SUBJECTED TO POLARIZING VOLTAGE (PERCENT)	4991
STEP 7A NOT APPLICABLE.	4985
STEP 7B NOT APPLICABLE.	4986
MOUNT PER DOCUMENT (DOC DES)	1449

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1432	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1432 MEGOHM(S) AT HIGH HUMIDITY.
1406	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1406 MEGOHM(S) AFTER DRYING.
1391	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1391.
1397	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 106 OF MIL-STD-202.
1395	POLARIZING VOLTAGE SHALL BE 1395 VOLTS, DC.
4981	LOADING VOLTAGE SHALL BE 4981 VOLTS, DC.
4980	LOADING VOLTAGE SHALL BE 4980 VOLTS, AC.
4991	4991 PERCENT OF THE SAMPLE SHALL BE SUBJECTED TO THE POLARIZING VOLTAGE.
4985	STEP 7A OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
4986	STEP 7B OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
1449	MOUNTING SHALL BE IN ACCORDANCE WITH 1449.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 106. (CONT)	
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	4983
PERFROM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	4984
RADIOGRAPHIC	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	6291
NO INHOMOGENEITIES, FOREIGN PARTICLES, INCORRECT ALIGMENT, DEFECTS.	6371
*DISPOSITION OF NEGATIVES OR RECORDS (SELECT ONE)	
DELIVERED.	4857
NOT DELIVERED.	4858

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4983	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.
4984	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.
6291	RADIOGRAPHIC. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6291.
6371	RADIOGRAPHIC. THE EXAMINATION OF THE RADIOGRAPHS OF THE ITEMS SHALL SHOW: NO INHOMOGENEITIES, NO FOREIGN PARTICLES WITHIN THE ENCLOSURE, ALL PARTS CORRECTLY ALIGNED WITH EACH OTHER, NO DEFECTIVE WORKMANSHIP DETAILS, OR ANY OTHER DEFECTS SPECIFIED HEREIN. MANUFACTURERS SHALL PROVIDE A MEANS OF IDENTIFYING ITEMS ON THE NEGATIVES (OR NONFILM RECORDS, IF APPLICABLE).
4857	NEGATIVES (OR NONFILM RECORDS, IF APPLICABLE SHALL BE DELIVERED WITH EACH SHIPMENT OF ITEMS.
4858	NEGATIVES (OR NONFILM RECORDS, IF APPLICABLE) SHALL BE MADE AVAILABEL FOR EXAMINATION UPON REQUEST.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RADIOGRAPHIC (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	6282
PER MIL-STD-202, METHOD 209.	4843
SOURCE-OBJECT DISTANCE (SELECT ONE)	
(METERS)	6286
(INCHES)	6285
VIEWING EQUIPMENT (IDENTIFY) _____	6287
MAGNIFICATION (X-POWER)	6288
DEFECTS SOUGHT (IDENTIFY) _____	6289
NONFILM TECHNIQUES ALLOWED.	6284
PENETRAMETER WIRE SIZE (SELECT ONE)	
(AWG)	6283

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6282	RADIOGRAPHIC. RADIOGRAPHIC INSPECTION SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6282.
4843	RADIOGRAPHIC. RADIOGRAPHIC INSPECTION SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 209 OF MIL-STD-202.
6286	THE SOURCE-OBJECT DISTANCE (THE DISTANCE FORM THE FOCAL SPOT OF THE X-RAY TUBE TO THE OBJECT BEING RADIOGRAPHED SHALL BE 6286 METER(S).
6285	THE SOURCE-OBJECT DISTANCE (THE DISTANCE FROM THE FOCAL SPOT OF THE X-RAY TUBE TO THE OBJECT BEING RADIOGRAPHED) SHALL BE 6285 INCH(S).
6287	THE VIEWING EQUIPMENT SHALL BE 6287.
6288	THE IMAGES SHALL BE VIEWED AT 6288 X-POWER MAGNIFICATION.
6289	THE DEFECTS TO BE SOUGHT SHALL BE 6289.
6284	NONFILM TECHNIQUES MAY BE USED, IF DESIRED. RECORDS SHALL BE MAINTAINED, FOR EXAMINATION OR DELIVERY, AS SPECIFIED.
6283	TO FURTHER INSURE ADEQUATE QUALITY, A RADIOGRAPH OF THE PENETRAMETER SHALL BE INCLUDED ON EACH RADIOGRAPHIC FILM. THE PENETRAMETER SHALL BE MADE FORM A SAMPLE ITEM OF THE SAME TYPE AS THE ITEM BEING INSPECTED (RADIOGRAPHED). THE PENETRAMETER SHOULD UTILIZE AN AWG SIZE 6283 COPPER WIRE ON THE SIDE OF THE ITEM FARTHEST FROM THE X-RAY FILM.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RADIOGRAPHIC (CONT)	
PENETRAMETER WIRE SIZE (CONT)	
(MILLIMETERS)	5297
RELIABILITY SCREENING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	6929
NO EVIDENCE OF PHYSICAL DAMAGE.	6930
MAXIMUM CHANGE IN TORQUE (PERCENT)	2010
MAXIMUM CHANGE IN FORCE (PERCENT)	3102
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	6696

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
5297	TO FURTHER INSURE ADEQUATE QUALITY, A RADIOGRAPH OF THE PENETRAMETER SHALL BE INCLUDED ON EACH RADIOGRAPHIC FILM. THE PENETRAMETER SHALL BE MADE FROM A SAMPLE ITEM OF THE SAME TYPE AS THE ITEM BEING INSPECTED (RADIOGRAPHED). THE PENETRAMETER SHOULD UTILIZE A 5297 (MILLIMETER(S) DIAMETER COPPER WIRE ON THE SIDE OF THE ITEM FARTHEST FROM THE X-RAY FILM.
6929	RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVER(LOAD). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6929.
6930	RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2010	THE CHANGE IN TORQUE SHALL BE NOT GREATER THAN 2010 PERCENT.
3102	THE CHANGE IN FORCE SHALL BE NOT GREATER THAN 3102 PERCENT.
6696	RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6696.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RELIABILITY SCREENING (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 108.	6697
*DURATION (SELECT ONE)	
TEST CONDITION (LETTER)	6698
(HOURS)	6699
*DUTY CYCLE (SELECT ONE)	
1.5 HOURS ON AND 0.5 HOUR OFF.	6710
STEADY STATE.	6713
*TEST TEMPERATURE (DEGREES CELSIUS)	6700
*TOLERANCE (DEGREES CELSIUS)	6701
STILL AIR REQUIRED.	6923
POWER APPLIED TIMES RATED POWER (NUMBER)	6921
MAXIMUM VOLTAGE (VOLTS)	6939
TEST POTENTIAL (SELECT ONE)	
(VOLTS, AC)	6706
(VOLTS, DC)	6707

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6697	RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE OVERLOAD). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 108 OF MIL-STD-202.
6698	TEST CONDITION LETTER 6698 SHALL APPLY.
6699	DURATION OF THE TEST SHALL BE 6699 HOUR(S).
6710	DUTY CYCLE SHALL BE ONE AND ONE-HALF HOURS ON AND ONE-HALF HOUR OFF.
6713	DUTY CYCLE SHALL BE STEADY STATE.
6700	TEST TEMPERATURE SHALL BE 6700 DEGREES CELSIUS.
6701	TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 6701 DEGREES CELSIUS.
6923	TEST CHAMBER SHALL HAVE STILL AIR.
6921	ITEM(S) SHALL BE TESTED AT 6921 TIMES THE RATED POWER.
6939	APPLIED VOLTAGE SHALL BE NOT GREATER THAN 6939 VOLTS.
6706	TEST POTENTIAL SHALL BE 6706 VOLTS, AC.
6707	TEST POTENTIAL SHALL BE 6707 VOLTS, DC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RELIABILITY SCREENING (CONT)	
PER MIL-STD-202, METHOD 108. (CONT)	
ELECTRICAL LOAD (OHMS)	6920
MEASUREMENT INTERVALS (HOURS)	6922
MOUNT PER DOCUMENT (DOC DES)	6924
MONITOR OPERATIONAL TORQUE.	3214
MONITOR OPERATIONAL FORCE.	3216
RESISTANCE TO SOLVENTS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4834
NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.	4830
MARKING SHALL REMAIN LEGIBLE.	4836
MAXIMUM CHANGE IN RESISTANCE (PERCENT)	3108
MAXIMUM CHANGE IN TORQUE (PERCENT)	3186
MAXIMUM CHANGE IN FORCE (PERCENT)	3188

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6920	THE ELECTRICAL LOAD SHALL BE 6920 OHMS.
6922	MEASUREMENTS SHALL BE TAKEN AT 6922 HOUR INTERVALS DURING THE TEST.
6924	MOUNTING SHALL BE IN ACCORDANCE WITH 6924..
3214	DURING THE TEST, OPERATING TORQUE SHALL BE MONITORED.
3216	DURING THE TEST, OPERATING FORCE SHALL BE MONITORED.
4834	RESISTANCE TO SOLVENTS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4834.
4830	RESISTANCE TO SOLVENTS. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADUATION OF PERFORMANCE.
4836	MARKING SHALL REMAIN LEGIBLE.
3108	CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN 3108 PERCENT.
3186	THE CHANGE IN TORQUE SHALL BE NOT GREATER THAN 3186 PERCENT.
3188	THE CHANGE IN FORCE SHALL BE NOT GREATER THAN 3188 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO SOLVENTS (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4829
PER MIL-STD-202, METHOD 215.	4839
SOLVENTS TO BE ADDED (NAME)	4838
SOLVENTS TO BE DELETED (SUBPARAGRAPH LETTER)	4835
BRUSHED AREA (SELECT ONE)	
BRUSH MARKING AREA.	4831
ALL OF SPECIMEN TO BE BRUSHED.	6279
MONITOR OPERATIONAL TORQUE.	3152
MONITOR OPERATIONAL FORCE.	3154
SALT SPRAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4878

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4829	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4829.
4839	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 215 OF MIL-STD-202. THE SPECIMENS SHALL BE DIVIDED INTO GROUPS OF EQUAL NUMBER TO THE EXTENT POSSIBLE.
4838	IN ADDITION TO THE SPECIFIED SOLVENT(S), 4838 SHALL ALSO BE USED.
4835	BRUSHING SHALL BE PERFORMED WITH THE SOLVENTS IN ACCORDANCE WITH METHOD 215 OF MIL-STD-202, EXCEPT THAT SOLUTION(S) 4835 SHALL NOT BE USED.
4831	THE MARKING AREA SHALL BE BRUSHED.
6279	THE ENTIRE SURFACE SHALL BE BRUSHED.
3152	DURING THE TEST, OPERATING TORQUE SHALL BE MONITORED.
3154	DURING THE TEST, OPERATING FORCE SHALL BE MONITORED.
4878	SALT SPRAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4878.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT SPRAY (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE.	4782
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4770
PER MIL-STD-202, METHOD 101.	4771
*TEST CONDITION (LETTER)	4772
MOUNTING (SELECT ONE)	
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4773
MOUNTING SHALL BE BY NORMAL METHOD.	4765
MOUNTING SHALL BE BY ANY SUITABLE METHOD.	4766
SAND AND DUST	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4958
NO EVIDENCE OF DUST PENETRATION.	4959

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4782	SALT SPRAY. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
4770	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4770.
4771	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 101 OF MIL-STD-202.
4772	TEST CONDITION LETTER 4772 SHALL APPLY.
4773	MOUNTING SHALL BE IN ACCORDANCE WITH 4773.
4765	MOUNTING SHALL BE BY THE NORMAL METHOD.
4766	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4958	SAND AND DUST. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4958.
4959	SAND AND DUST. THERE SHALL BE NO EVIDENCE OF DUST PENETRATION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SAND AND DUST (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE.	4821
CHANGE IN FORCE (PERCENT)	3110
CHANGE IN TORQUE (PERCENT)	4018
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4952
PER MIL-STD-202, METHOD 110.	4960
TEST SPECIMEN(S) SHALL BE OPERATED DURING TEST STEP(S) (NUMBER)	4872
*DURATION OF OPERATION (HOURS)	6299
SPECIMEN ORIENTATION SHALL BE CHANGED DURING TEST.	1539
SECOND 6-HOUR TEST REQUIRED IMMEDIATELY FOLLOWING TEMPERATURE STABILIZATION IN STEP 2.	4956
MONITOR OPERATIONAL TORQUE.	3174
MONITOR OPERATIONAL FORCE.	3176

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4821	SAND AND DUST. THERE SHALL BE NO EVIDENCE OF FAILURE, OR PHYSICAL DAMAGE.
3110	THE CHANGE IN FORCE SHALL BE NOT GREATER THAN 3110 PERCENT.
4018	THE CHANGE IN TORQUE SHALL BE NOT GREATER THAN 4018 PERCENT.
4952	SAND AND DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4952.
4960	SAND AND DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 110 OF MIL-STD-202.
4872	ITEM(S) SHALL BE OPERATED DURING STEP(S) 4872.
6299	DURATION OF OPERATION SHALL BE 6299 HOUR(S).
1539	ORIENTATION SHALL BE CHANGED DURING THE TEST.
4956	THE SECOND 6-HOUR TEST SHALL BE PERFORMED IMMEDIATELY AFTER REACHING TEMPERATURE STABILIZATION IN STEP 2.
3174	DURING THE TEST, OPERATING TORQUE SHALL BE MONITORED.
3176	DURING THE TEST, OPERATING FORCE SHALL BE MONITORED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	7315
NO EVIDENCE OF PHYSICAL DAMAGE.	7316
MAXIMUM CHANGE IN RESISTANCE (PERCENT)	3164
MAXIMUM CHANGE IN TORQUE (PERCENT)	3166
MAXIMUM CHANGE IN FORCE (PERCENT)	3168
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	7311
PER MIL-STD-810, MEHTOD 516.	7312
*PROCEDURE	
PROCEDURE I.	7313
*FIGURE (SELECT ONE)	
FIGURE 516-1 APPLIES.	7317
FIGURE 516-2 APPLIES.	7318

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7315	SHOCK. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 7315.
7316	SHOCK. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
3164	THE CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN 3164 PERCENT.
3166	THE CHANGE IN TORQUE SHALL NOT BE GREATER THAN 3166 PERCENT.
3168	THE CHANGE IN FORCE SHALL BE NOT GREATER THAN 3168 PERCENT.
7311	SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 7311.
7312	SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 516 OF MIL-STD-810.
7313	PROCEDURE NUMBER I SHALL APPLY.
7317	THE SHOCK PULSE SHAPE SHALL BE SAWTOOTH IN ACCORDANCE WITH FIGURE 516-1 OF METHOD 516 OF MIL-STD-810.
7318	THE SHOCK PULSE SHAPE SHALL BE HALF SINE WAVE IN ACCORDANCE WITH FIGURE 516-2 OF METHOD 516 OF MIL-STD-810.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK (CONT)	
PROCEDURE I. (CONT)	
*AMPLITUDE, A OR B (LETTER)	7305
*DURATION, C OR D (LETTER)	7306
PROCEDURE II.	6327
PROCEDURE III.	6338
*FIGURE (SELECT ONE)	
FIGURE 516-1 APPLIES.	6339
FIGURE 516-2 APPLIES.	6340
*AMPLITUDE A OR B (LETTER)	6341
*DURATION C OR D (LETTER)	6342
PROCEDURE IV.	6343
*FIGURE (SELECT ONE)	
FIGURE 516-1 APPLIES.	6344
FIGURE 516-2 APPLIES.	6345
*AMPLITUDE, A OR B (LETTER)	6346
*DURATION, C OR D (LETTER)	6347

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7305	AMPLITUDE LETTER 7305 SHALL APPLY.
7306	DURATION LETTER 7306 SHALL APPLY.
6327	PROCEDURE NUMBER II SHALL APPLY.
6338	PROCEDURE NUMBER III SHALL APPLY.
6339	THE SHOCK PULSE SHAPE SHALL BE SAWTOOTH IN ACCORDANCE WITH THE FIGURE 516-1 METHOD 516 OF MIL-STD-810.
6340	THE SHOCK PULSE SHAPE SHALL BE HALF SINE WAVE IN ACCORDANCE WITH FIGURE 516-2 OF METHOD 515 OF MIL-STD-810.
6341	AMPLITUDE LETTER 6341 SHALL APPLY.
6342	DURATION LETTER 6342 SHALL APPLY.
6343	PROCEDURE NUMBER IV SHALL APPLY.
6344	THE SHOCK PULSE SHALL BE SAWTOOTH IN ACCORDANCE WITH FIGURE 516-1 OF METHOD 515 OF MIL-STD-810.
6345	THE SHOCK PULSE SHAPE WILL BE HALF SINE WAVE IN ACCORDANCE WITH FIGURE 516-2 OF METHOD 516 OF MIL-STD-810.
6346	AMPLITUDE LETTER 6346 SHALL APPLY.
6347	DURATION LETTER 6347 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK (CONT)	
PROCEDURE (CONT)	
PROCEDURE V.	6348
PROCEDURE VI.	6349
TEST TEMPERATURE (DEGREES CELSIUS)	7307
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	7308
OPERATION DURING TEST REQUIRED.	7309
MONITOR OPERATIONAL TORQUE.	3170
MONITOR OPERATIONAL FORCE.	3172

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6348	PROCEDURE NUMBER V SHALL APPLY.
6349	PROCEDURE NUMBER VI SHALL APPLY.
7307	THE TEST TEMPERATURE SHALL BE 7307 DEGREES CELSIUS.
7308	THE TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 7308 DEGREES CELSIUS.
7309	OPERATION DURING THE TEST REQUIRED.
3170	DURING THE TEST, OPERATING TORQUE SHALL BE MONITORED.
3172	DURING THE TEST, OPERATING FORCE SHALL BE MONITORED.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SOLDERABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4674
NO EVIDENCE OF PHYSICAL DAMAGE.	4675
MEET EVALUATION CRITERIA SPECIFIED IN METHOD 208 OF MIL-STD-202.	4672
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4662
PER MIL-STD-202, METHOD 208.	4683
NUMBER OF TERMINALS TO BE TESTED (QUANTITY)	4666
DEPTH OF IMMERSION (SELECT ONE)	
(INCHES)	4667
(MILLIMETERS)	4663

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4674	SOLDERABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4674.
4675	SOLDERABILITY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4672	THE RESULTS OF THE SOLDERABILITY TEST SHALL BE IN ACCORDANCE WITH THE ACCEPTANCE CRITERIA OF METHOD 208 OF MIL-STD-202.
4662	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4662.
4683	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 208 OF MIL-STD-202.
4666	4666 TERMINATION(S) PER UNIT SHALL BE TESTED.
4667	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4667 INCH(S).
4663	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4663 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SOLDERABILITY (CONT)	
PER MIL-STD-202, METHOD 208. (CONT)	
DISTANCE WRAP WIRE APPLIED FROM BODY (SELECT ONE)	
(INCHES)	4664
(MILLIMETERS)	4665
SPECIAL PREPARATION PERMITTED.	6205
TEMPERATURE, HIGH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	6228
NO EVIDENCE OF PHYSICAL DAMAGE.	6229
MAXIMUM CHANGE IN RESISTANCE (PERCENT)	3198
MAXIMUM CHANGE IN TORQUE (PERCENT)	3200
MAXIMUM CHANGE IN FORCE (PERCENT)	3202
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	6217
PER MIL-STD-810, METHOD 501.	6218

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4664	THE WRAP WIRE SHALL BE 4664 INCH(S) FROM THE BODY.
4665	THE WRAP WIRE SHALL BE 4665 MILLIMETER(S) FROM THE BODY.
6205	SPECIAL PREPARATION SHALL BE PERMITTED.
6228	TEMPERATURE, HIGH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6228.
6229	TEMPERATURE, HIGH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
3198	THE CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN 3198 PERCENT.
3200	THE CHANGE IN TORQUE SHALL BE NOT GREATER THAN 3200 PERCENT.
3202	THE CHANGE IN FORCE SHALL BE NOT GREATER THAN 3202 PERCENT.
6217	TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6217.
6218	TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 501 OF MIL-STD-810.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, HIGH (CONT)	
PER MIL-STD-810, MEHTOD 810. (CONT)	
*PROCEDURE (ROMAN NUMERAL)	6219
STORAGE TEMPERATURE (DEGREES CELSIUS)	6220
STORAGE DURATION (HOURS)	6221
HIGHEST OPERATING TEMPERATURE (DEGREES CELSIUS)	6222
OPERATING TIME (SELECT ONE)	
(MINUTES)	6224
(HOURS)	6225
MONITOR OPERATIONAL TORQUE.	3204
MONITOR OPERATIONAL FORCE.	3206
TEMPERATURE, LOW	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	6318
NO EVIDENCE OF PHYSICAL DAMAGE.	6319
MAXIMUM CHANGE IN RESISTANCE (PERCENT)	3208

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6219	PROCEDURE NUMBER 6219 SHALL APPLY.
6220	STORAGE TEMPERATURE SHALL BE 6220 DEGREES CELSIUS.
6221	STORAGE DURATION SHALL BE 6221 HOUR(S).
6222	HIGHEST OPERATING TEMPERATURE SHALL BE 6222 DEGREES CELSIUS.
6224	OPERATING TIME SHALL BE 6224 MINUTE(S).
6225	OPERATING TIME SHALL BE 6225 HOUR(S).
3204	DURING THE TEST, OPERATING TORQUE SHALL BE MONITORED.
3206	DURING THE TEST, OPERATING FORCE SHALL BE MONITORED.
6318	TEMPERATURE, LOW. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6318.
6319	TEMPERATURE, LOW. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
3208	THE CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN 3208 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, LOW (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE (CONT)	
MAXIMUM CHANGE IN TORQUE (PERCENT)	3210
MAXIMUM CHANGE IN FORCE (PERCENT)	3212
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	6231
PER MIL-STD-810, METHOD 502.	6232
STORAGE TEMPERATURE (DEGREES CELSIUS)	6234
STORAGE DURATION (HOURS)	6235
LOWEST OPERATING TEMPERATURE (DEGREES CELSIUS)	6236
CHAMBER AIR VELOCITY (SELECT ONE)	
(FEET PER SECOND)	6237
(METERS PER SECOND)	6238
OPERATION TIME (SELECT ONE)	
(MINUTES)	6315

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3210	THE CHANGE IN TORQUE SHALL BE NOT GREATER THAN 3210 PERCENT.
3212	THE CHANGE IN FORCE SHALL BE NOT GREATER THAN 3212 PERCENT.
6231	TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6231.
6232	TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 502 OF MIL-STD-810.
6234	STORAGE TEMPERATURE SHALL BE 6234 DEGREES CELSIUS.
6235	STORAGE DURATION SHALL BE 6235 HOUR(S).
6236	LOWEST OPERATING TEMPERATURE SHALL BE 6236 DEGREES CELSIUS.
6237	CHAMBER AIR VELOCITY SHALL BE 6237 FEET PER SECOND.
6238	CHAMBER AIR VELOCITY SHALL BE 6238 METERS PER SECOND.
6315	OPERATING SHALL BE 6315 MINUTE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, LOW (CONT)	
OPERATION TIME (CONT)	
(HOURS)	6316
MONITOR OPERATIONAL TORQUE.	3218
MONITOR OPERATIONAL FORCE.	3220
TERMINAL STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1418
NO EVIDENCE OF PHYSICAL DAMAGE.	1433
MAXIMUM CHANGE IN RESISTANCE (PERCENT)	2972
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1410
PER MIL-STD-202, METHOD 211.	1375

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6316	OPERATING TIME SHALL BE 6316 HOUR(S).
3218	DURING THE TEST, OPERATING TORQUE SHALL BE MONITORED.
3220	DURING THE TEST, OPERATING FORCE SHALL BE MONITORED.
1418	TERMINAL STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1418.
1433	TERMINAL STRENGTH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2972	THE CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN 2972 PERCENT.
1410	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1410.
1375	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 211 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINAL STRENGTH (CONT)	
PER MIL-STD-202, METHOD 211. (CONT)	
*TEST CONDITIONS	
TEST CONDITION A, APPLIED FORCE (SELECT ONE)	
(POUNDS)	1411
(NEWTONS)	1419
TEST CONDITION B, BENDS (NUMBER)	1412
TEST CONDITION C, LOAD (SELECT ONE)	
(POUNDS)	1413
(KILOGRAMS)	1420
TEST CONDITION D.	1414
TEST CONDITION E, TORQUE (SELECT ONE)	
(POUND-INCHES)	1416
(NEWTON METERS)	1421

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1411	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APLLIED FORCE SHALL BE 1411 POUND(S).
1419	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE SPPLIED FORCE SHALL BE 1419 NEWTON(S).
1412	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION B. THERE SHALL BE 1412 BEND(S).
1413	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1413 POUND(S).
1420	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1420 KILOGRAM(S).
1414	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION D.
1416	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1416 POUND-INCH(S).
1421	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1421 NEWTON METER(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THERMAL SHOCK (TEMPERATURE CYCLING)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4722
NO EVIDENCE OF PHYSICAL DAMAGE.	4723
MAXIMUM CHANGE IN RESISTANCE (PERCENT)	2984
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2992
MAXIMUM CHANGE IN FORCE (PERCENT)	3182
MAXIMUM CHANGE IN TORQUE (PERCENT)	3180
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4713
PER MIL-STD-202, METHOD 107.	4714
*TEST CONDITION (LETTER)	4715
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4719
MONITOR OPERATIONAL TORQUE.	3156
MONITOR OPERATIONAL FORCE.	3158

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4722	THERMAL SHOCK (TEMPERATURE CYCLING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4722.
4723	THERMAL SHOCK (TEMPERATURE CYCLING). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2984	THE CHANGE IN RESISTANCE SHALL NOT BE GREATER THAN 2984 PERCENT.
2992	THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 2992 MEGOHM(S).
3182	THE CHANGE IN FORCE SHALL BE NOT GREATER THAN 3182 PERCENT.
3180	THE CHANGE IN TORQUE SHALL BE NOT GREATER THAN 3180 PERCENT.
4713	THERMAL SHOCK (TEMEPRATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4713.
4714	THERMAL SHOCK (THERMAL CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 107 OF MIL-STD-202.
4715	TEST CONDITION LETTER 4715 SHALL APPLY.
4719	MOUNTING SHALL BE IN ACCORDANCE WITH 4719.
3156	DURING THE TEST, OPERATING TORQUE SHALL BE MONITORED.
3158	DURING THE TEST, OPERATING FORCE SHALL BE MONITORED.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, HIGH FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1455
NO EVIDENCE OF PHYSICAL DAMAGE.	1456
NO DISCONTINUITY DURING TEST.	1473
REMAIN WITHIN SPECIFIED TOLERANCE.	1469
MAXIMUM CLOSING OF CONTACTS (MICROSECONDS)	1463
MINIMUM BREAK IN CONTINUITY (MICROSECONDS)	1458
MAXIMUM CHANGE IN TORQUE (PERCENT)	3112
MAXIMUM CHANGE IN FORCE (PERCENT)	3114
MINIMUM ACTUATE VOLTAGE (VOLTS)	3116
MINIMUM DROPOUT VOLTAGE (VOLTS)	3118

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1455	VIBRATION, HIGH FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1455.
1456	VIBRATION, HIGH FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1473	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1469	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1463	MAXIMUM CLOSING OF OPEN CONTACTS SHALL BE 1463 MICROSECONDS DURING TEST.
1458	BREAK IN CONTINUITY DURING TEST SHALL BE NOT GREATER THAN 1458 MICROSECONDS.
3112	THE CHANGE IN TORQUE SHALL BE NOT GREATER THAN 3112 PERCENT.
3114	THE CHANGE IN FORCE SHALL BE NOT GREATER THAN 3114 PERCENT.
3116	THE SOLENOID SHALL HAVE A MINIMUM ACTUATE VOLTAGE OF 3116 VOLT(S).
3118	THE SOLENOID SHALL HAVE A MINIMUM DROPOUT VOLTAGE OF 3118 VOLT(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, HIGH FREQUENCY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1446
PER MIL-STD-202, METHOD 204.	1447
*TEST CONDITION (LETTER)	1448
PERCENT RATED LOAD APPLIED (PERCENT)	6200
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4709
NORMAL MOUNTING METHOD.	4708
MOUNT PER DOCUMENT (DOC DES)	4707
METHOD OF DETERMINING MECHANICAL RESONANCE (SELECT ONE)	
VISUALLY BY MEANS OF A STROBOTAC.	1533
ELECTRICAL OUTPUT INDICATORS.	1534
MONITOR OPERAIONAL TORQUE.	3160
MONITOR OPERATIONAL FORCE.	3162

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1446	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1446.
1447	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 204 OF MIL-STD-202.
1448	TEST CONDITION LETTER 1448 SHALL APPLY.
6200	THE LOAD SHALL BE 6200 PERCENT OF THE RATED LOAD.
4709	MOUNTING SHALL BE BY ANY SUITABLE MEHTOD.
4708	MOUNTING SHALL BE BY NORMAL METHOD.
4707	MOUNTING SHALL BE IN ACCORDANCE WITH 4707.
1533	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE VISUALLY BY MEANS OF A STROBOTAC.
1534	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE BY ELECTRICAL OUTPUT INDICATORS.
3160	DURING THE TEST, OPERATING TORQUE SHALL BE MONITORED.
3162	DURING THE TEST, OPERATING FORCE SHALL BE MONITORED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1475
NO EVIDENCE OF PHYSICAL DAMAGE.	1476
NO DISCONTINUITY DURING TEST.	1490
MAXIMUM CHANGE IN TORQUE (PERCENT)	3120
MAXIMUM CHANGE IN FORCE (PERCENT)	3122
MINIMUM ACTUATE VOLTAGE (VOLTS)	3124
MINIMUM DROPOUT VOLTAGE (VOLTS)	3126
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1466
PER MIL-STD-202, METHOD 201.	1467
DURATION OF VIBRATION PER AXIS (HOURS)	1470

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
1475	VIBRATION, LOW FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1475.
1476	VIBRATION, LOW FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1490	THERE SHALL BE NO DISCONTINUITY DURING THE TEST.
3120	THE CHANGE IN TORQUE SHALL BE NOT GREATER THAN 3120 PERCENT.
3122	THE CHANGE IN FORCE SHALL BE NOT GREATER THAN 3122 PERCENT.
3124	THE SOLENOID SHALL HAVE A MINIMUM ACTUATE VOLTAGE OF 3124 VOLT(S).
3126	THE SOLENOID SHALL HAVE A MINIMUM DROPOUT VOLTAGE OF 3126 VOLT(S).
1466	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1466.
1467	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 201 OF MIL-STD-202.
1470	DURATION OF TEST SHALL BE 1470 HOUR(S) PER AXIS.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY (CONT)	
PER MIL-STD-202, METHOD 201. (CONT)	
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4731
NORMAL MOUNTING METHOD.	4730
MOUNT PER DOCUMENT (DOC DES)	4729
DIRECTION OF MOTION	
PARALLEL TO LONGITUDINAL AXIS.	1535
PERPENDICULAR TO LONGITUDINAL AXIS.	1536
ON THE CENTERLINE OF MOST SENSITIVE AXIS.	4979
90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.	4978
THREE MUTUALLY PERPENDICULAR DIRECTIONS.	1537
MONITOR OPERATIONAL TORQUE.	3190
MONITOR OPERATIONAL FORCE.	3192

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4731	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4730	MOUNTING SHALL BE BY THE NORMAL METHOD.
4729	MOUNTING SHALL BE IN ACCORDANCE WITH 4729.
1535	THE DIRECTION OF MOTION SHALL BE PARALLEL TO THE LONGITUDINAL AXIS.
1536	THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE LONGITUDINAL AXIS.
4979	THE DIRECTION OF MOTION SHALL BE ON THE CENTERLINE OF THE MOST SENSITIVE AXIS.
4978	THE DIRECTION OF MOTION SHALL BE 90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.
1537	THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUALLY PERPENDICULAR DIRECTIONS.
3190	DURING THE TEST, OPERATING TORQUE SHALL BE MONITORED.
3192	DURING THE TEST, OPERATING FORCE SHALL BE MONITORED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1435
NO EVIDENCE OF PHYSICAL DAMAGE.	1436
DISCONTINUITY DURING TEST (SELECT ONE)	
NO DISCONTINUITY.	1374
MAXIMUM (MILLISECONDS)	1545
MAXIMUM (MICROSECONDS)	1546
MAXIMUM CHANGE IN TORQUE (PERCENT)	3128
MAXIMUM CHANGE IN FORCE (PERCENT)	3130
MINIMUM ACTUATE VOLTAGE (VOLTS)	3132
MINIMUM DROPOUT VOLTAGE (VOLTS)	3134

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1435	VIBRATION, RANDOM. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1435.
1436	VIBRATION, RANDOM. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1374	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1545	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1545 MILLISECOND(S).
1546	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1546 MICROSECOND(S).
3128	THE CHANGE IN TORQUE SHALL BE NOT GREATER THAN 3128 PERCENT.
3130	THE CHANGE IN FORCE SHALL BE NOT GREATER THAN 3130 PERCENT.
3132	THE SOLENOID SHALL HAVE A MINIMUM ACTUATE VOLTAGE OF 3132 VOLT(S).
3134	THE SOLENOID SHALL HAVE A MINIMUM DROPOUT VOLTAGE OF 3134 VOLT(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1426
PER MIL-STD-202, METHOD 214.	1427
*TEST CONDITION (ROMAN NUMERAL AND LETTER)	1428
*DURATION OF APPLICATION (SELECT ONE)	
(MINUTES)	1438
(HOURS)	1431
MONITORING INSTRUMENTATION OF EXCITATION (SELECT ONE)	
ANY SUITABLE SYSTEM.	1452
CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.	1453
CALIBRATED OSCILLOSCOPE.	1459
NUMBER OF VIBRATION MONITORING TEST POINTS (QUANTITY)	1430

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1426	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1426.
1427	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 214 OF MIL-STD-202.
1428	TEST CONDITION NUMBER AND LETTER 1428 SHALL APPLY.
1438	THE DURATION OF THE TEST SHALL BE 1438 MINUTE(S).
1431	THE DURATION OF THE TEST SHALL BE 1431 HOUR(S).
1452	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE ANY SUITABLE INSTRUMENTATION SYSTEM.
1453	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.
1459	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED OSCILLOSCOPE.
1430	THERE SHALL BE 1430 VIBRATION MONITORING POINT(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
PER-MIL-STD-202, METHOD 214. (CONT)	
LOCATION OF MONITORING POINTS (SELECT ONE)	
ANY SUITABLE LOCATION.	1439
AS CLOSE AS PRACTICAL TO TEST SPECIMEN.	1462
MONITOR OPERATIONAL TORQUE.	3194
MONITOR OPERATIONAL FORCE.	3196
PERCENT OF RATED LOAD APPLIED (PERCENT)	4678
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4977
NORMAL MOUNTING METHOD.	4976
MOUNT PER DOCUMENT (DOC DES)	4975

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1439	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE ANY SUITABLE LOCATION.
1462	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE AS CLOSE AS PRACTICAL TO THE TEST SPECIMEN(S).
3194	DURING THE TEST, OPERATING TORQUE SHALL BE MONITORED.
3196	DURING THE TEST, OPERATING FORCE SHALL BE MONITORED.
4678	THE LOAD SHALL BE 4678 PERCENT OF THE RATED LOAD.
4977	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4976	MOUNTING SHALL BE BY THE NORMAL METHOD.
4975	MOUNTING SHALL BE IN ACCORDANCE WITH 4975.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A _____	7001
B _____	7002
C _____	7003
D _____	7004
E _____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE | STANDARD PARAGRAPH

MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.

6870 WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.

ADDITIONAL REQUIREMENTS.

7001 (A) 7001.

7002 (B) 7002.

7003 (C) 7003.

7004 (D) 7004.

7005 (E) 7005.

6372 PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.

7630 PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.

7629 PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADDITIONAL PART MARKING	
A _____	6991
B _____	6992
C _____	6993
D _____	6994
E _____	6995
DEFINITION OF HERMETIC SEALING	
NOTE: AUTOMATIC WHEN CODES ARE USED TO REQUIRE HERMETIC SEALING.	
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

DEFINITION OF HERMETIC SEALING. FOR THE PURPOSE OF THIS DOCUMENT, A HERMETICALLY-SEALED ITEM IS ONE IN WHICH THE ELEMENT IS CONTAINED WITHIN A SEALED ENCLOSURE OF CERAMIC, GLASS OR METAL, OR A COMBINATION THEREOF, WHERE SEALING IS ACCOMPLISHED BY MATERIAL FUSION, WELDING, BRAZING OR SOLDERING.

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-ER
Army-ME
Army-MR
Army-CR

User activity:
Army-AR

Preparing activity:
Army-MI


(Project EDS-A336)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.


APPENDIX A

ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

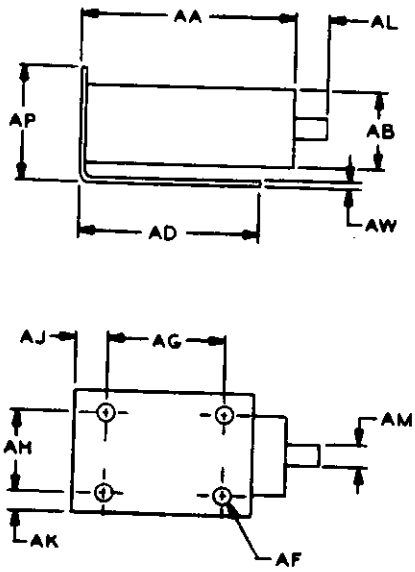


024-01-1

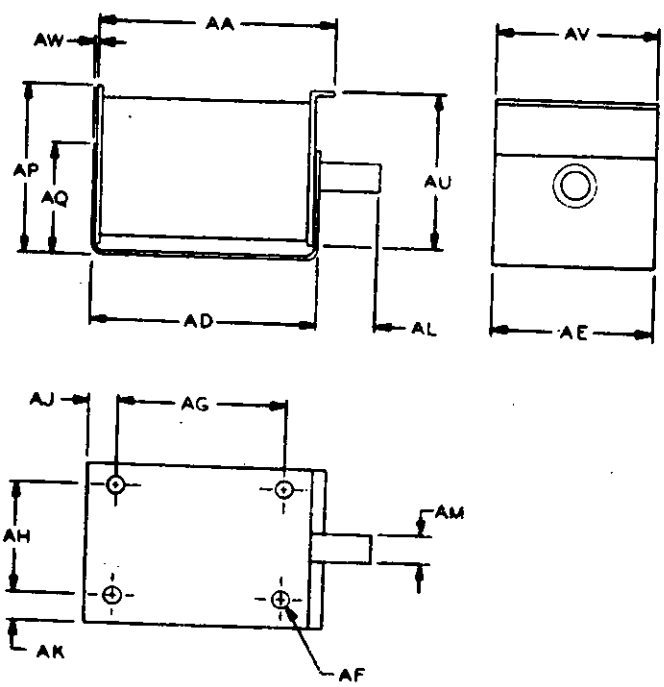


024-01-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

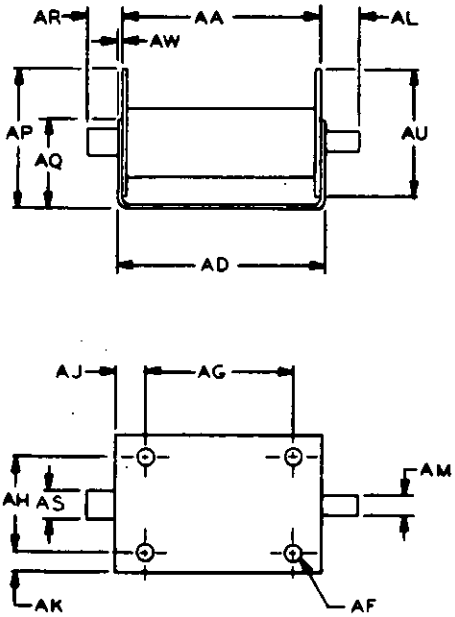


024-01-3

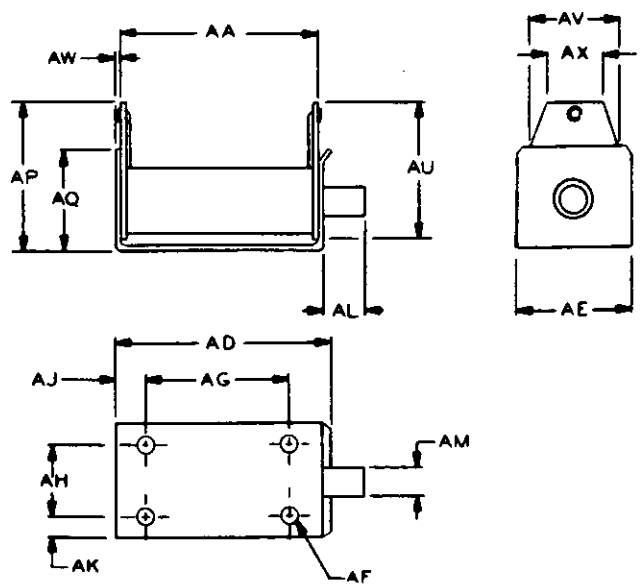


024-01-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

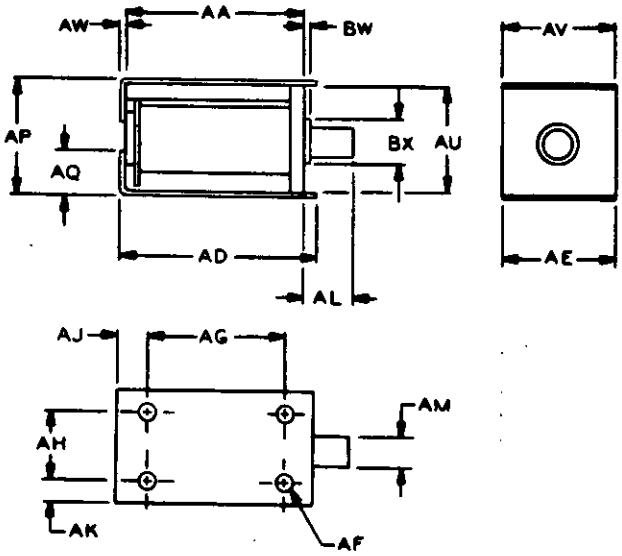


024-01-5

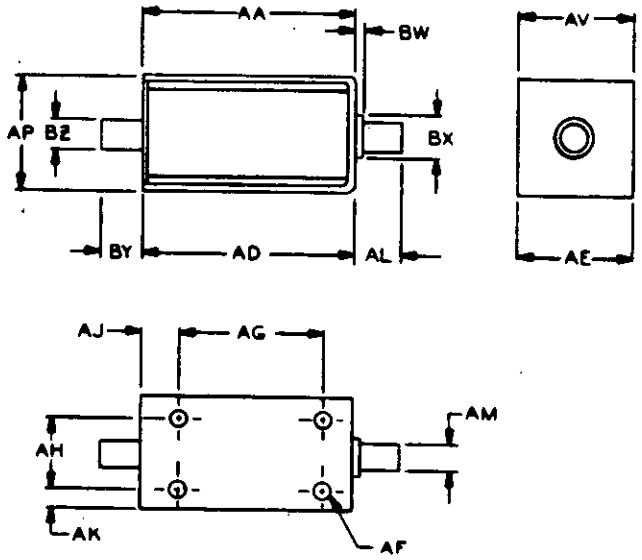


024-01-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

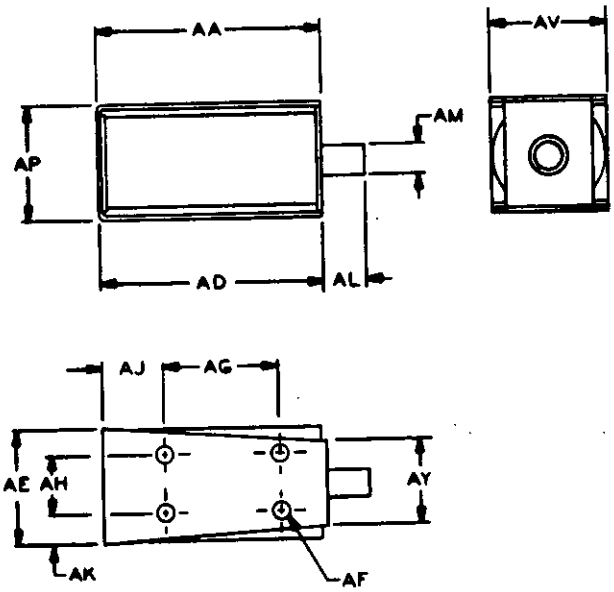


024-01-7

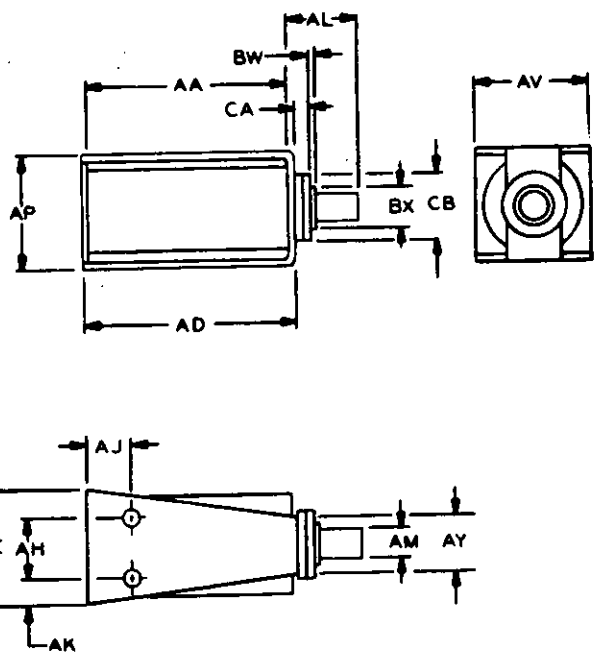


024-01-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

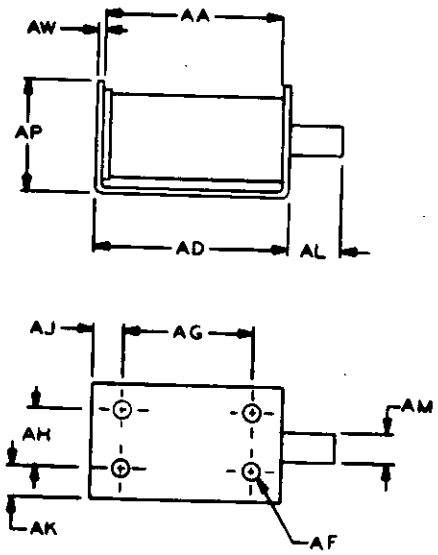


024-01-9

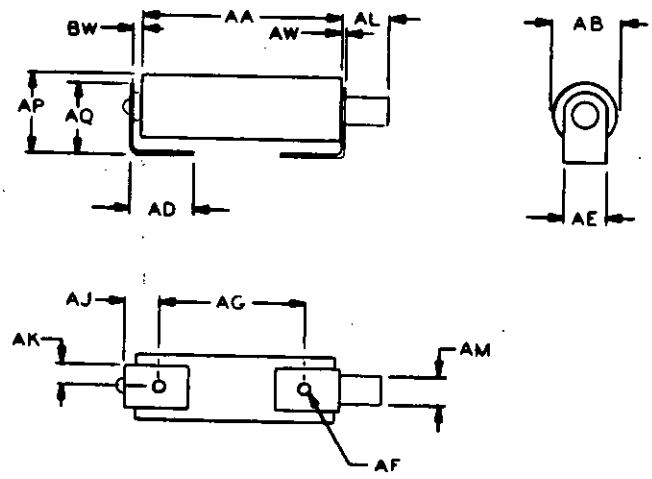


024-01-10


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

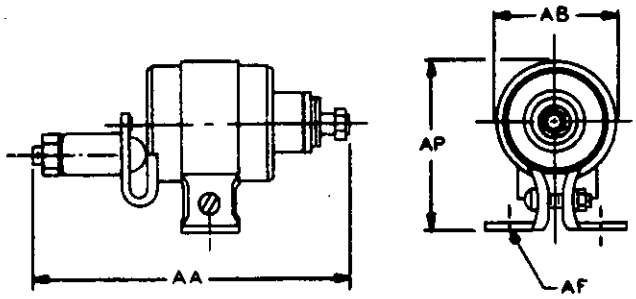

024-02-1

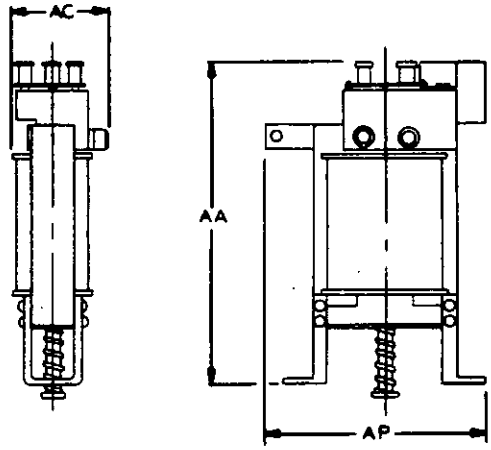


024-02-2

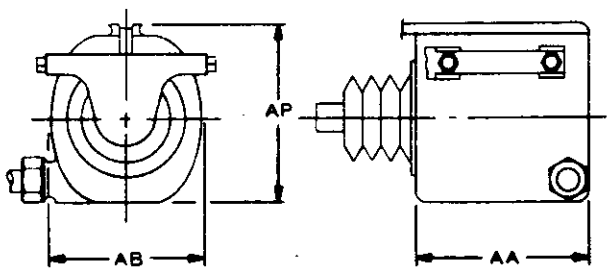


024-02-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

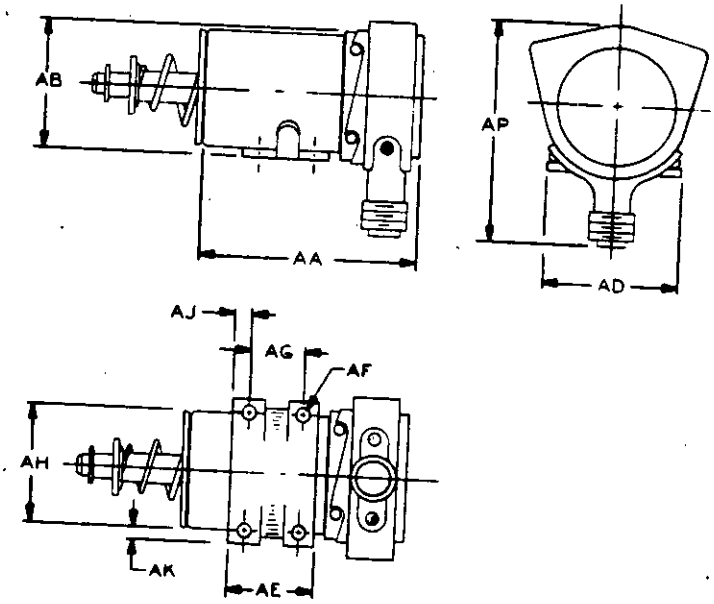


024-02-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

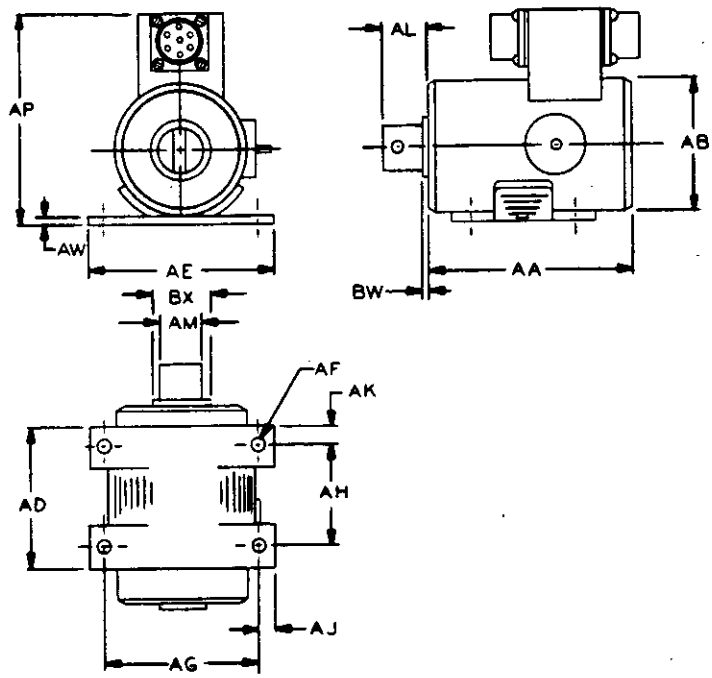


024-02-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

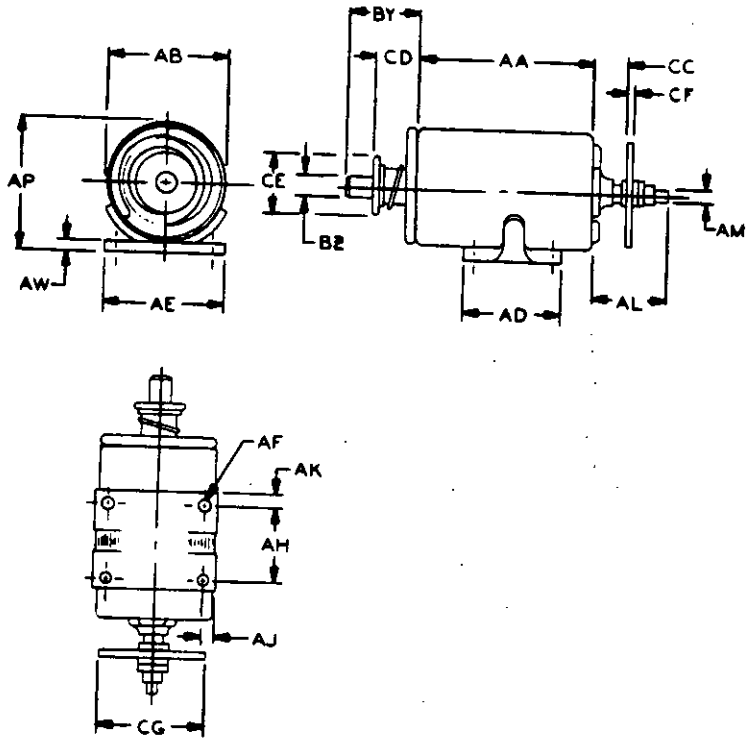


024-02-6

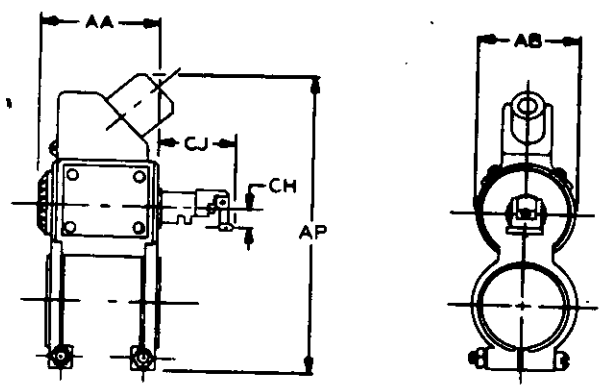


024-02-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

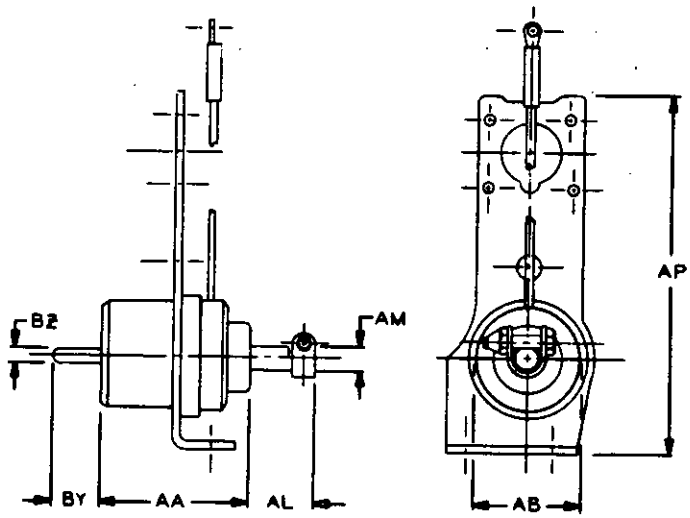


024-02-8

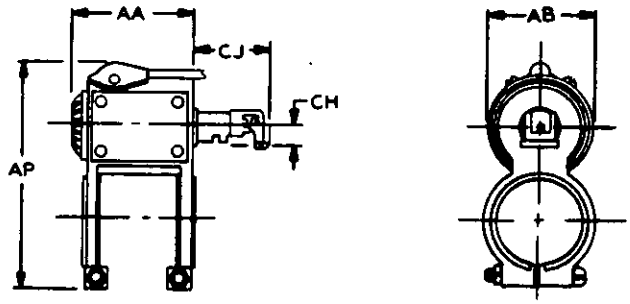


024-02-9

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T07:23Z
Check the source to verify that this is the current version before use.

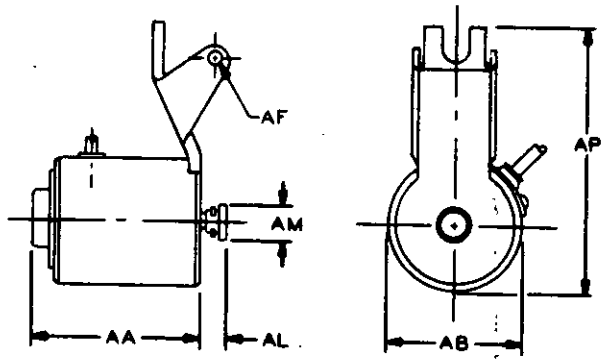


024-02-10

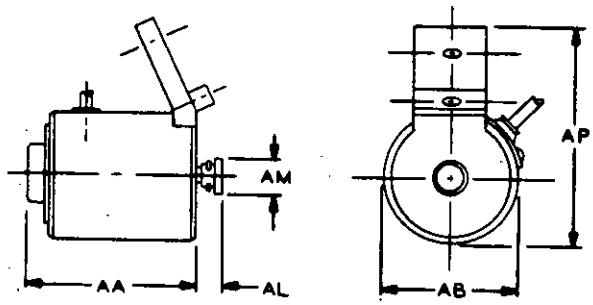


024-02-11

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

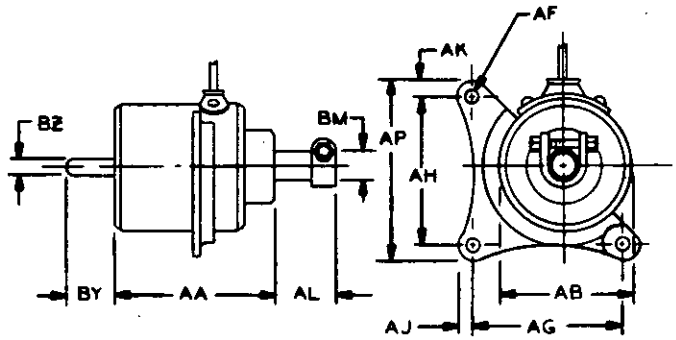


024-02-12

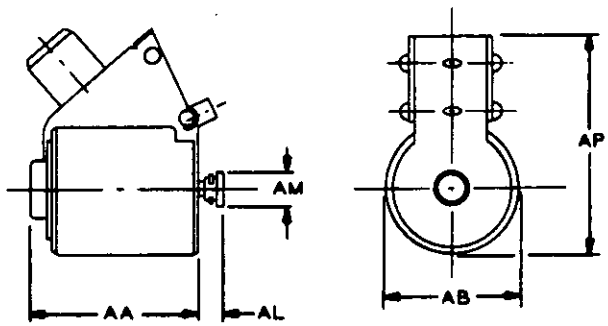


024-02-13

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

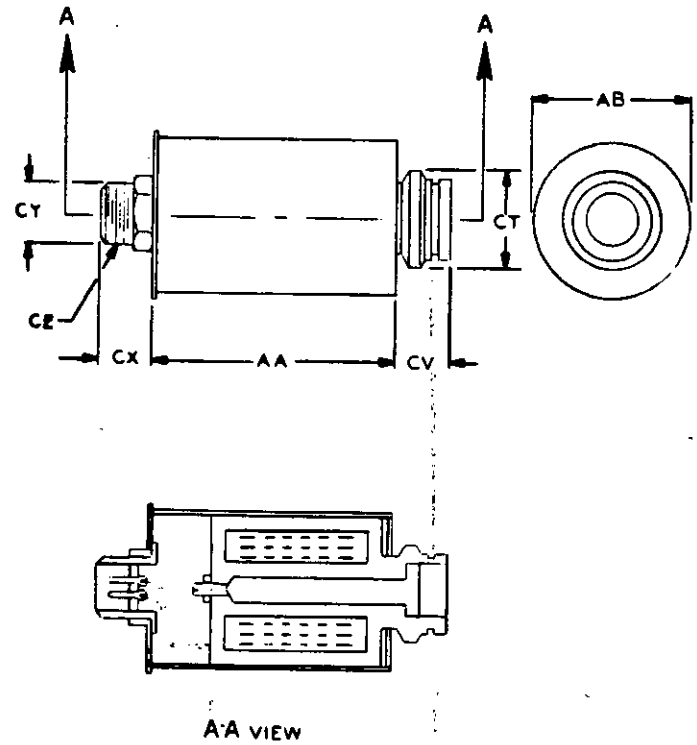


024-03-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

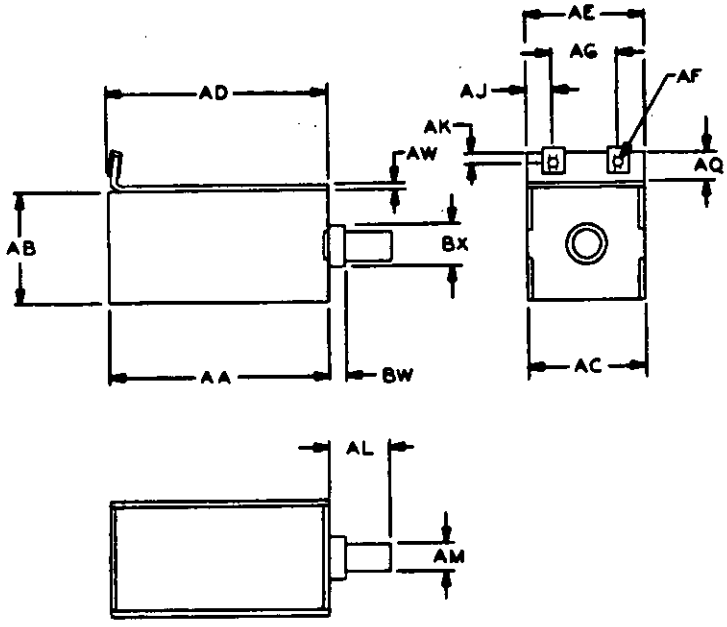


024-03-2

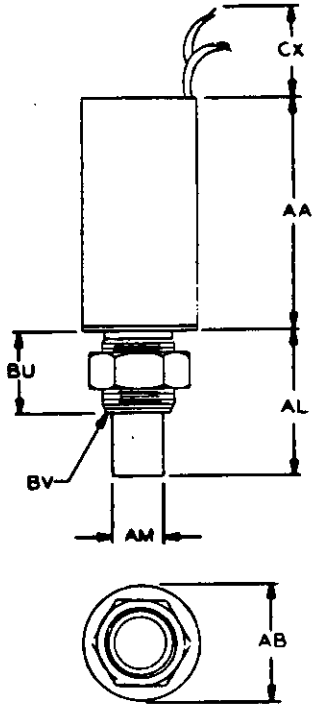


024-03-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

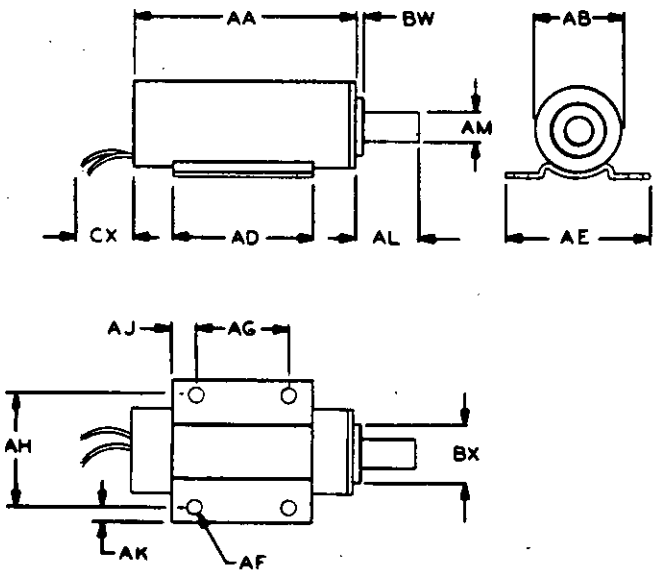


024-03-4

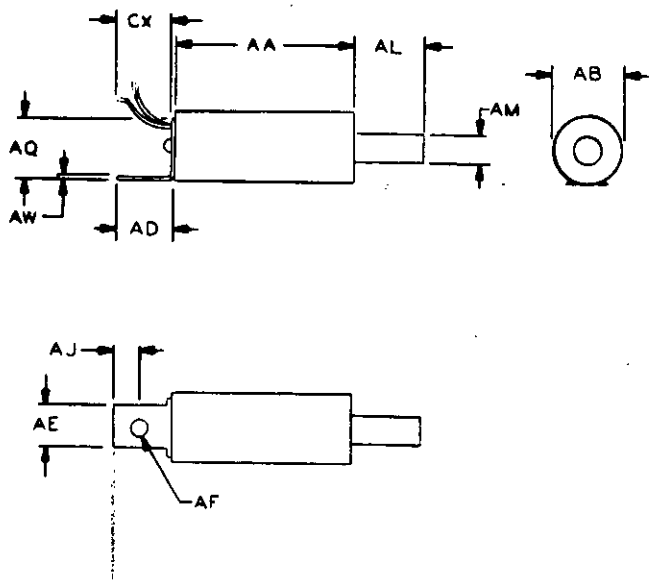


024-03-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

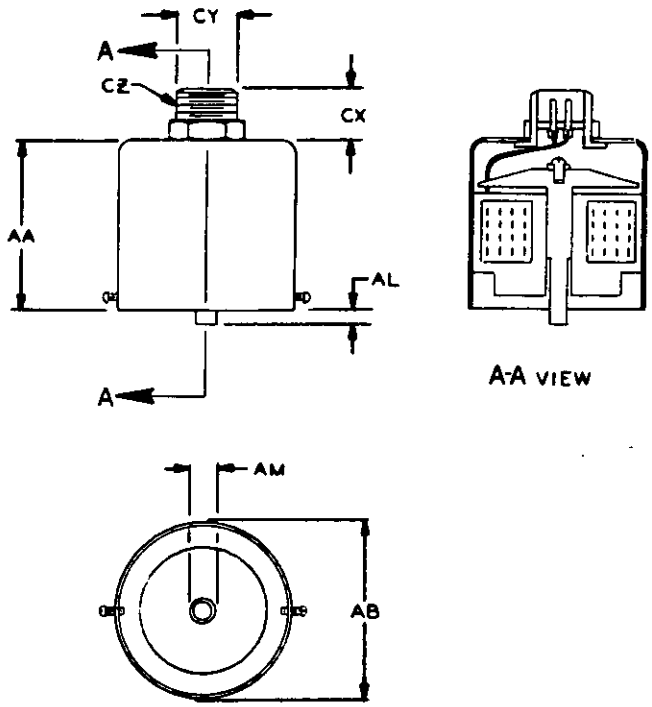


024-03-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

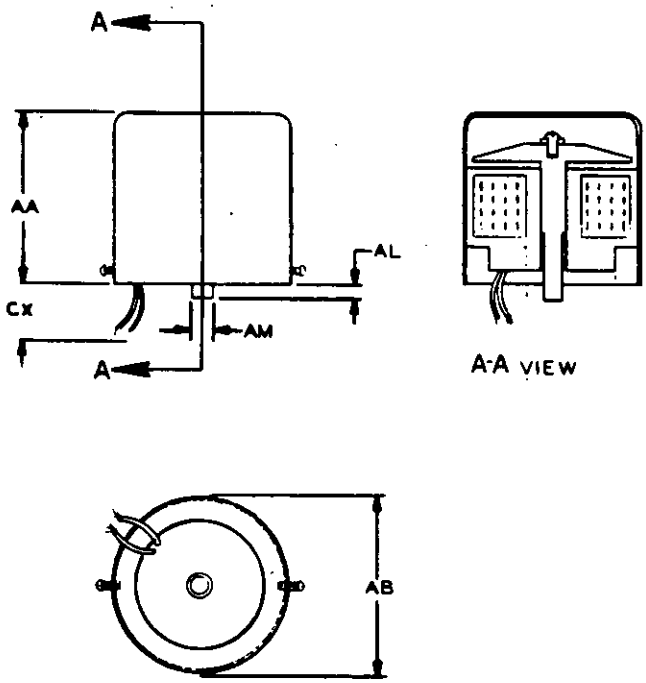


024-03-7

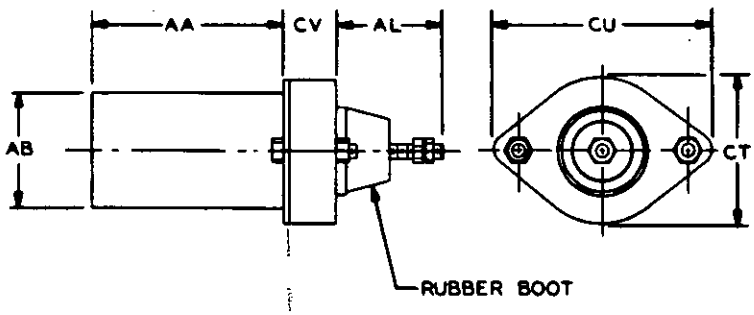


024-03-8

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

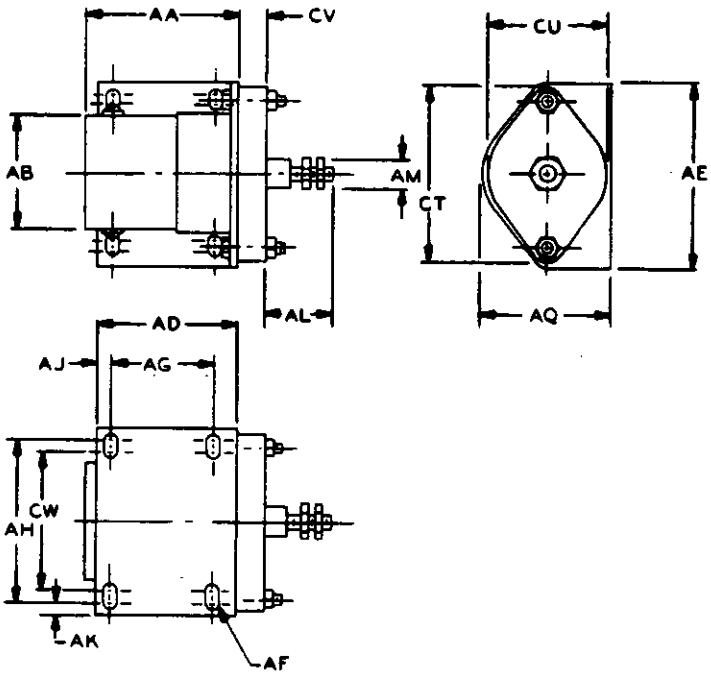


024-03-9

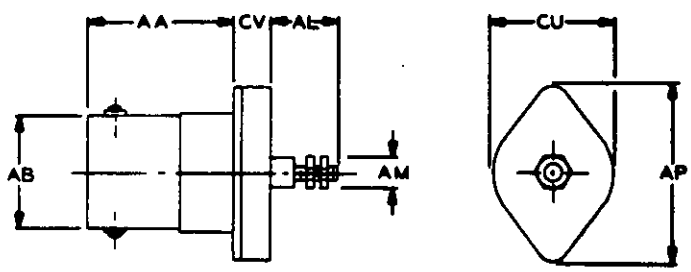


024-03-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

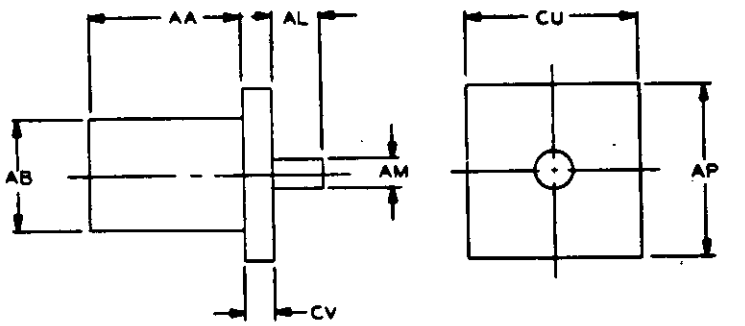


024-03-11

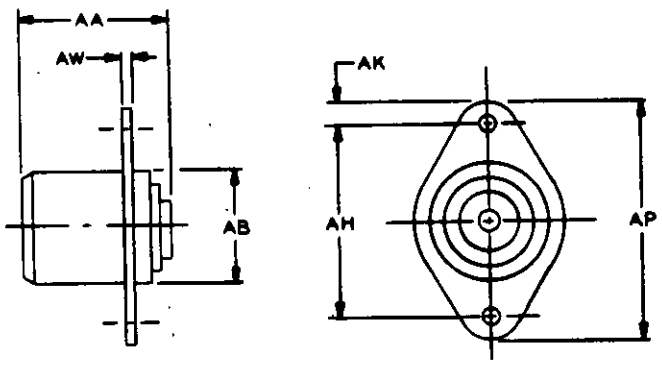



024-03-12

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

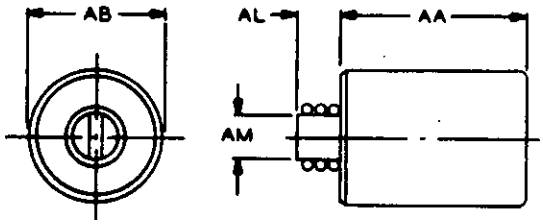


024-03-13

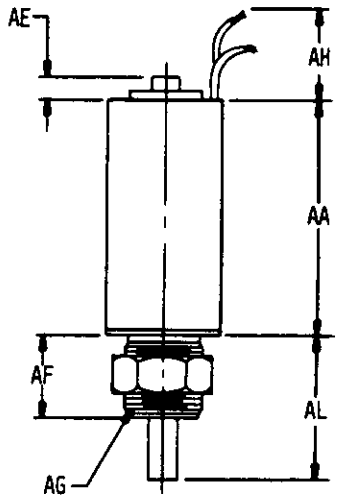




024-03-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

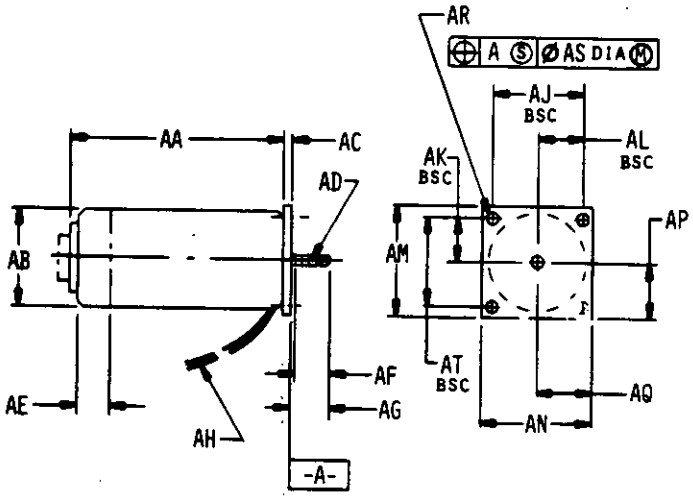


Ø24-Ø3-15

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

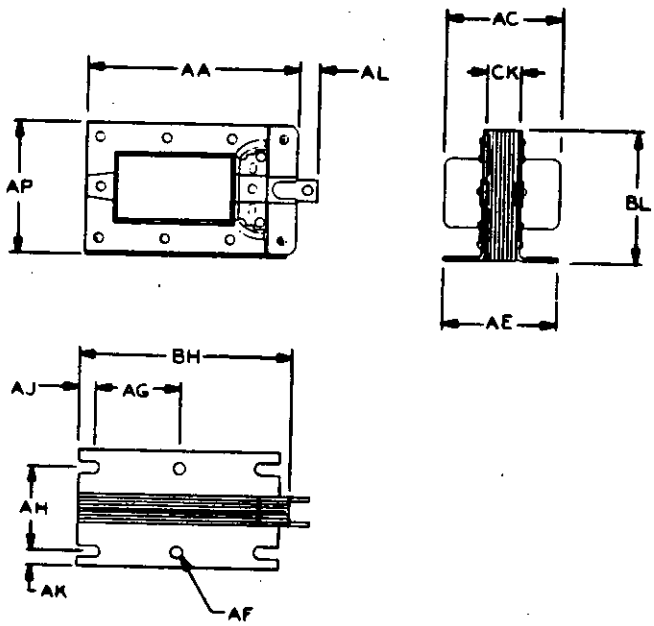


024-04-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

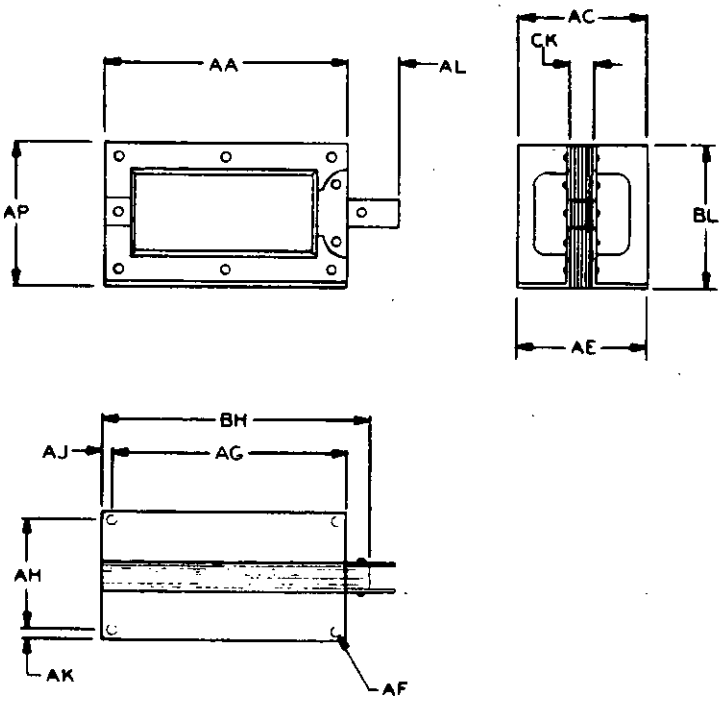


024-04-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

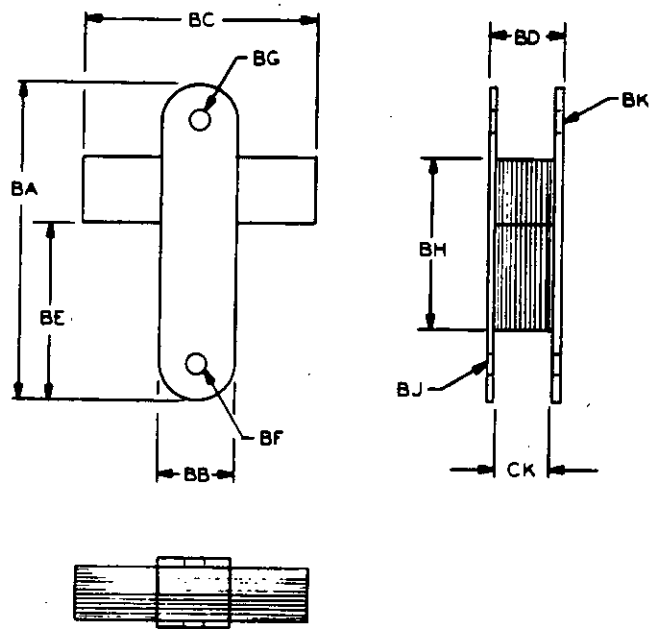


Ø24-Ø5-1

Source: https://assist.dla.mil -- Downloaded: 2026Ø-26T07:23Z
Check the source to verify that this is the current version before use.

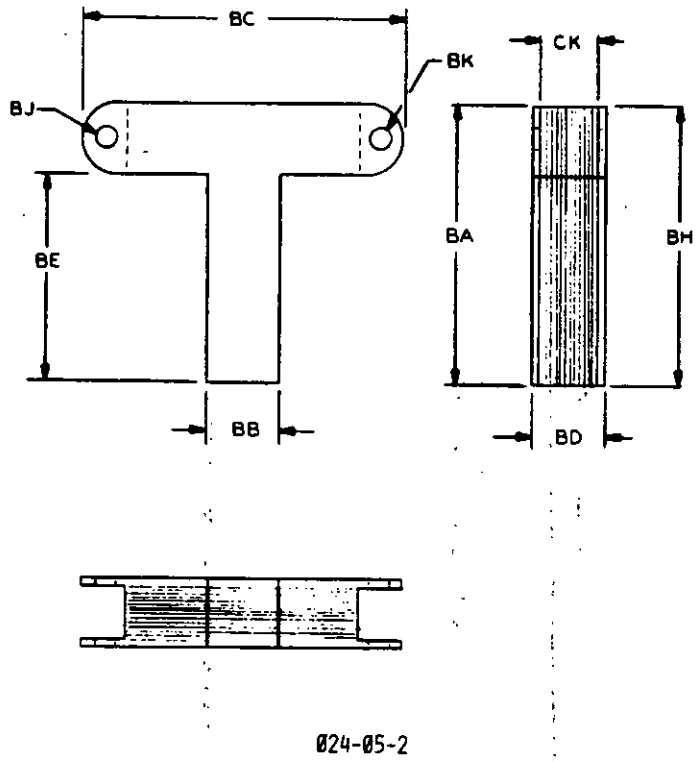


024-05-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

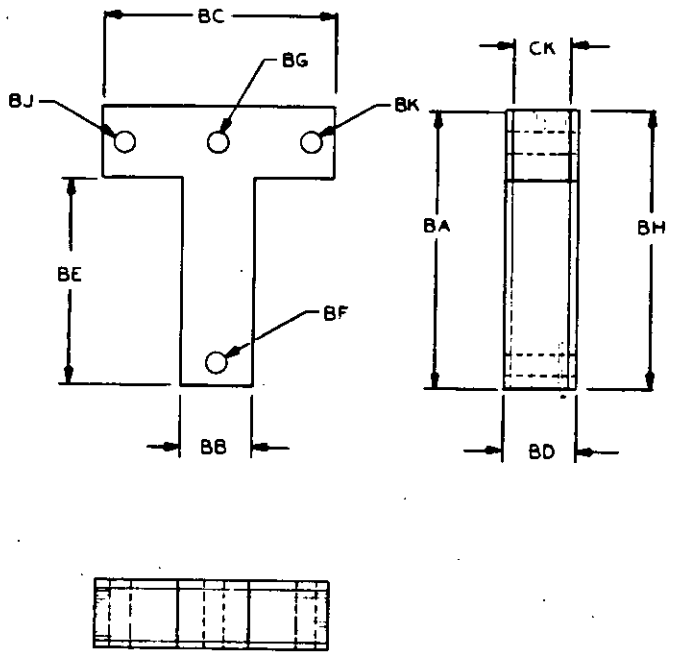


024-05-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

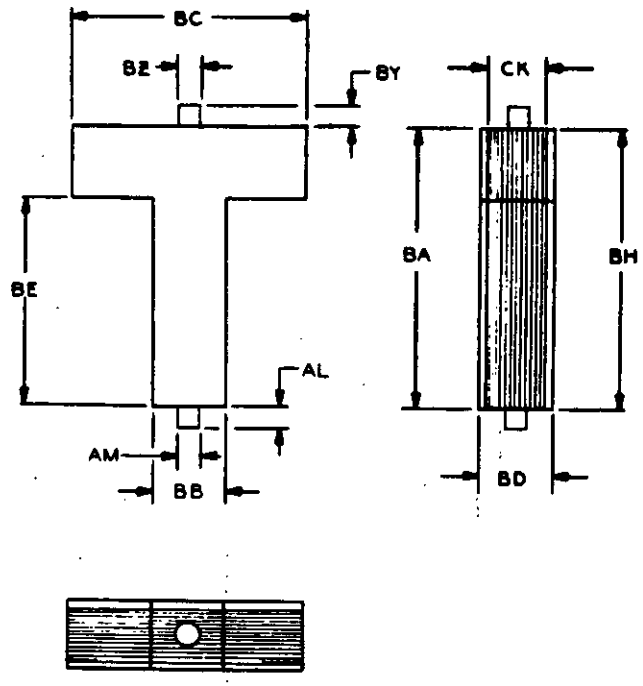


024-05-4


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

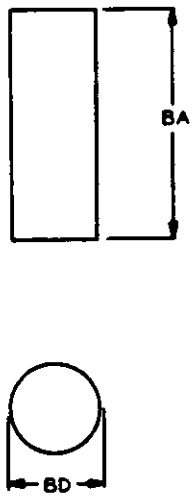

024-06-1

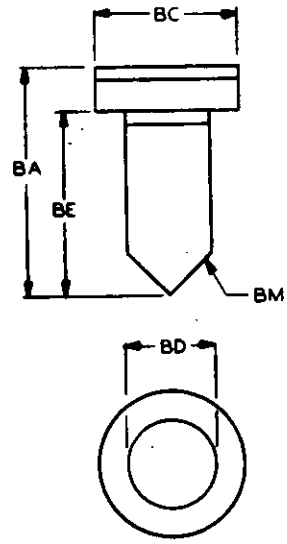


024-06-2

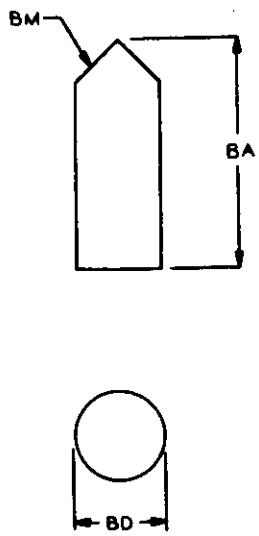


024-06-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current revision before use.

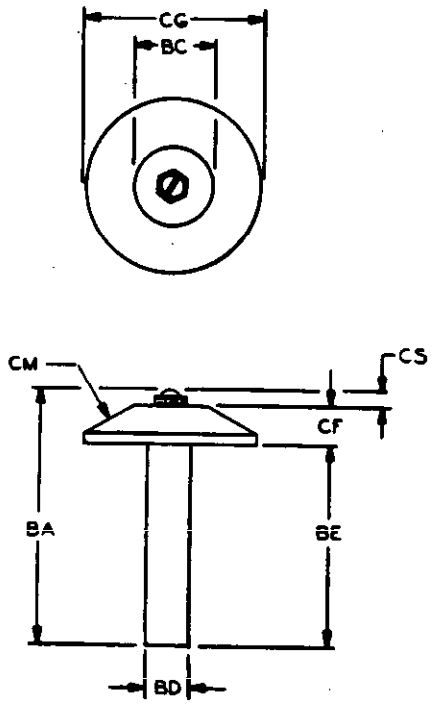


024-06-4

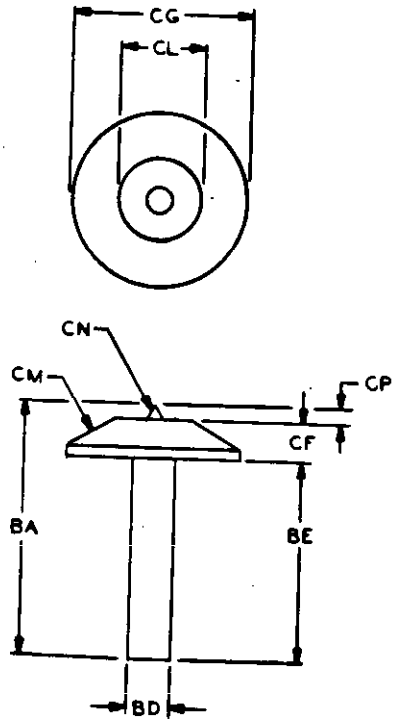



024-06-5

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.




024-06-6




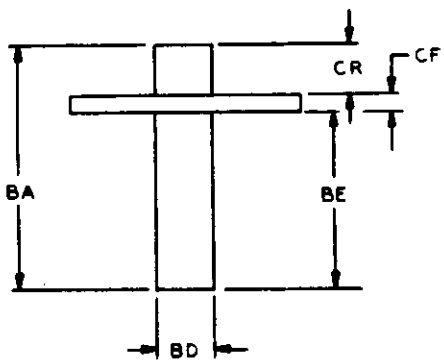


024-06-7

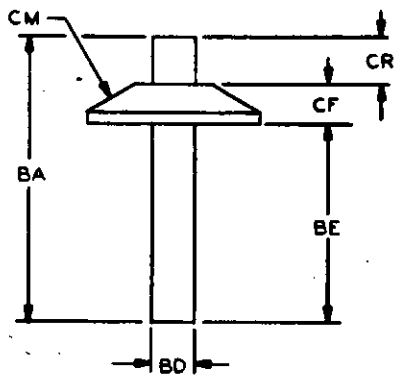

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

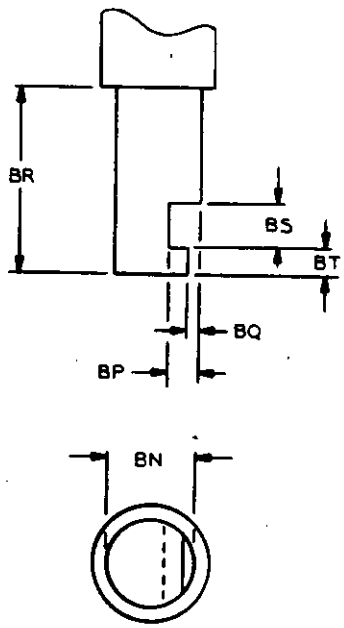


024-07-1

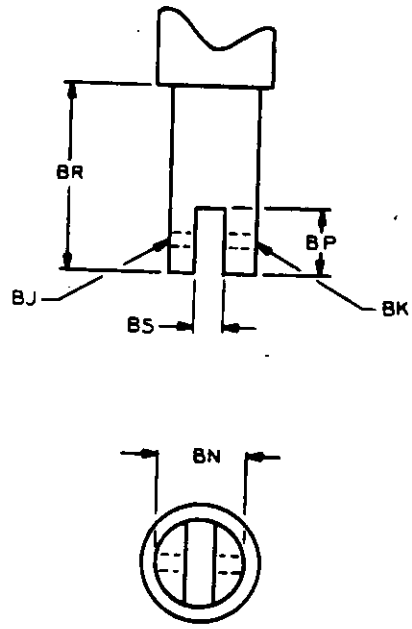


024-07-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

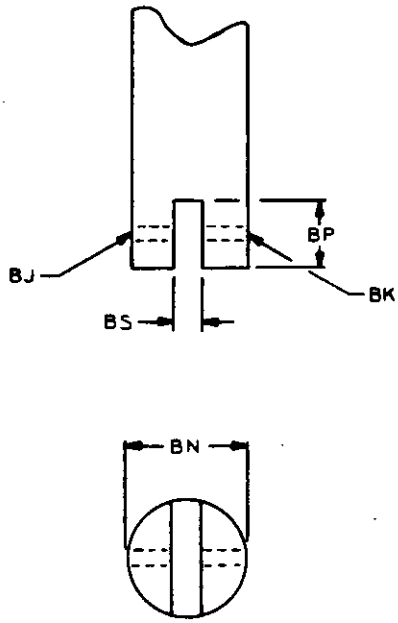


024-07-3

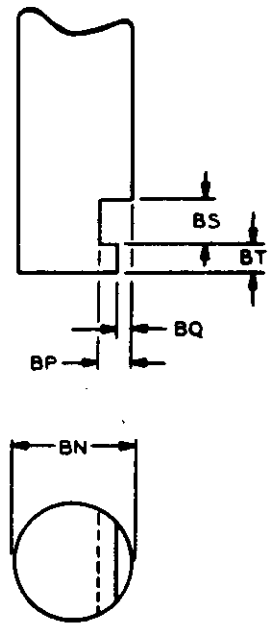


024-07-4


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

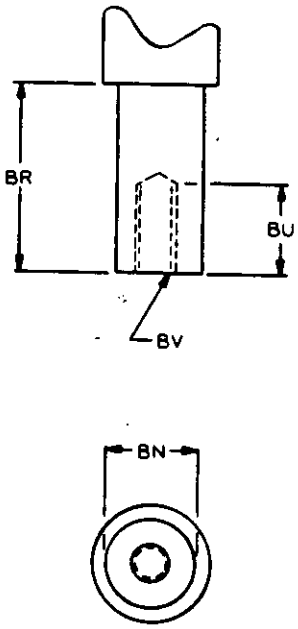

024-07-5

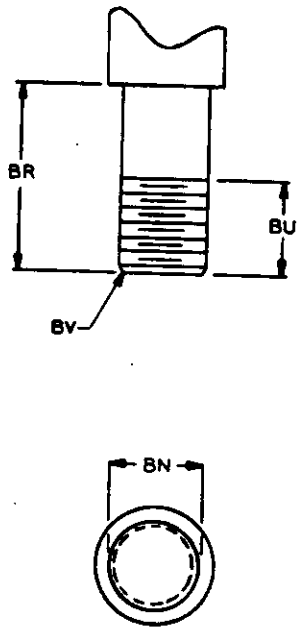


024-07-6

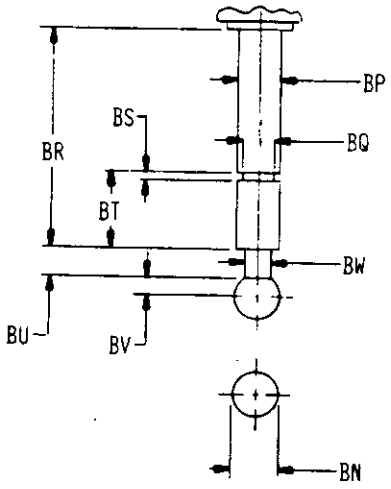

024-07-7


Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

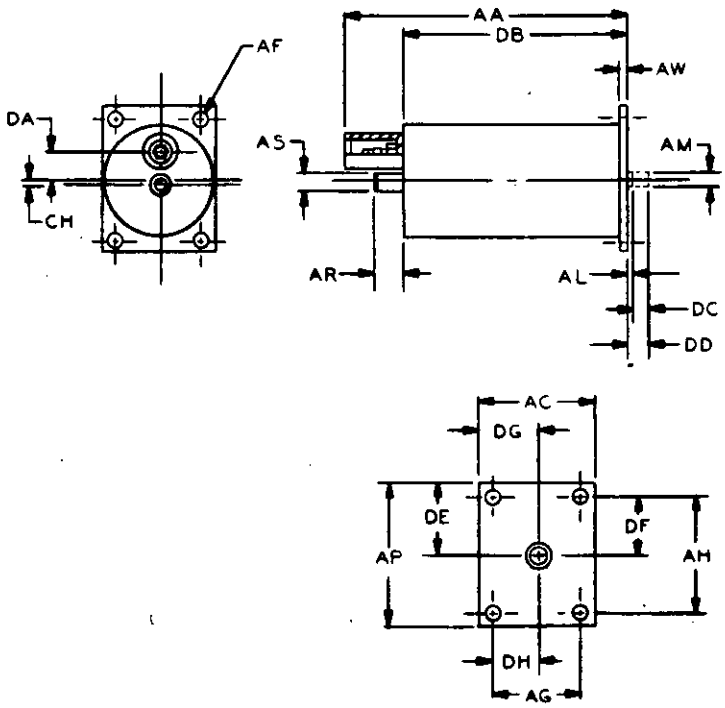


024-08-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.


TERMINATION LOCATION, REFERENCE PLANE ____

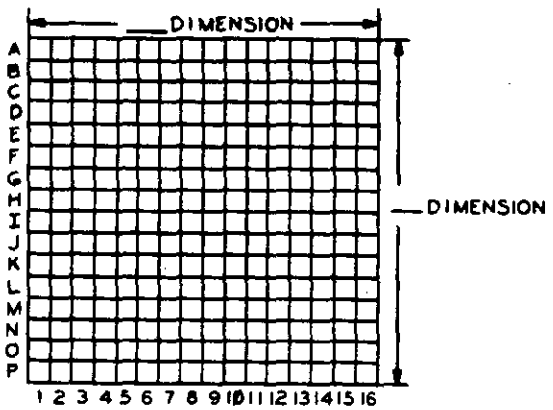

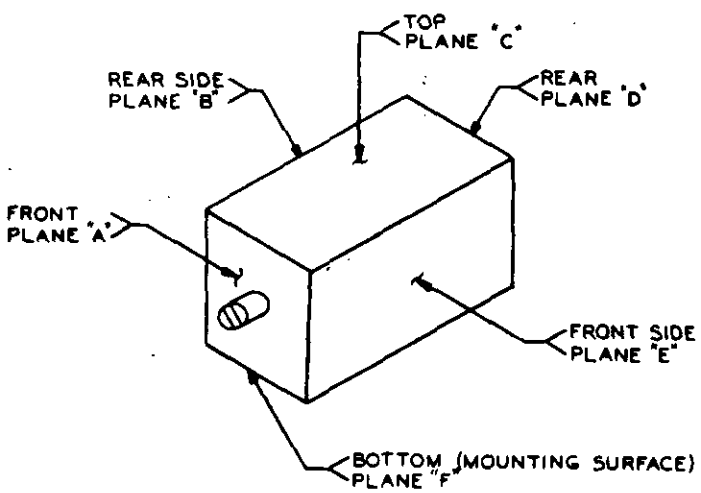


024-09-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

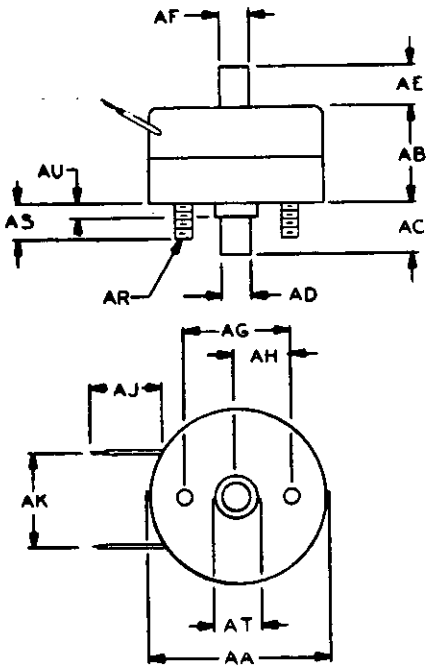


024-10-1

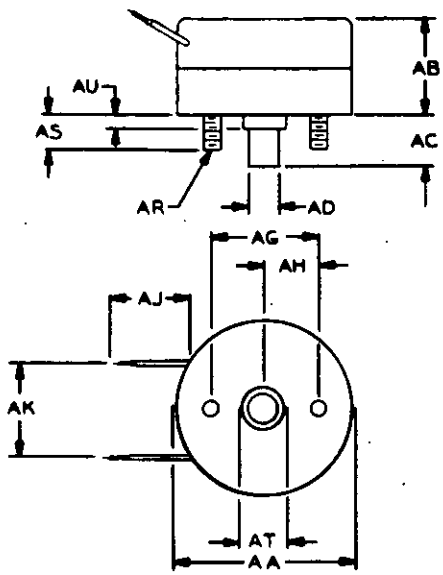


024-10-2

Source: https://assist.dla.mil -- Downloaded: 2025-10-26T07:23Z
Check the source to verify that this is the current version before use.

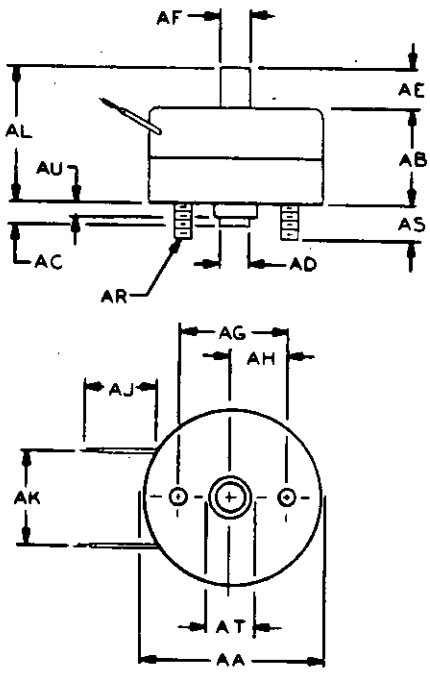


024-10-3

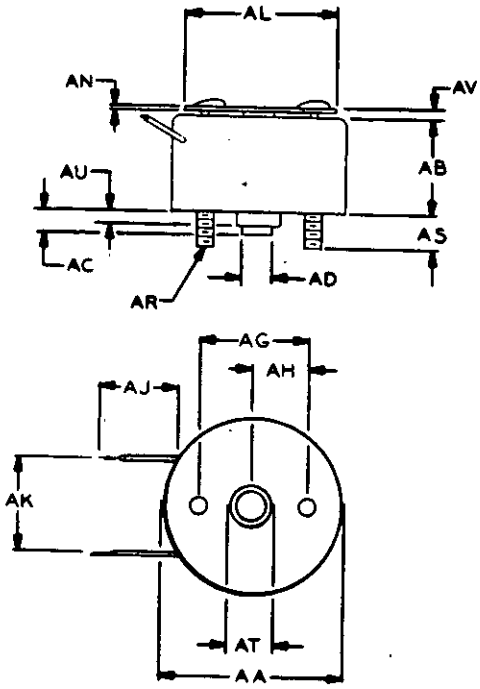


024-10-4

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

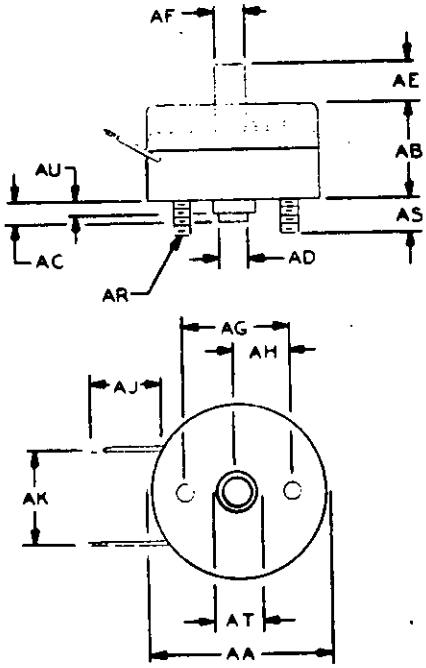


024-10-5

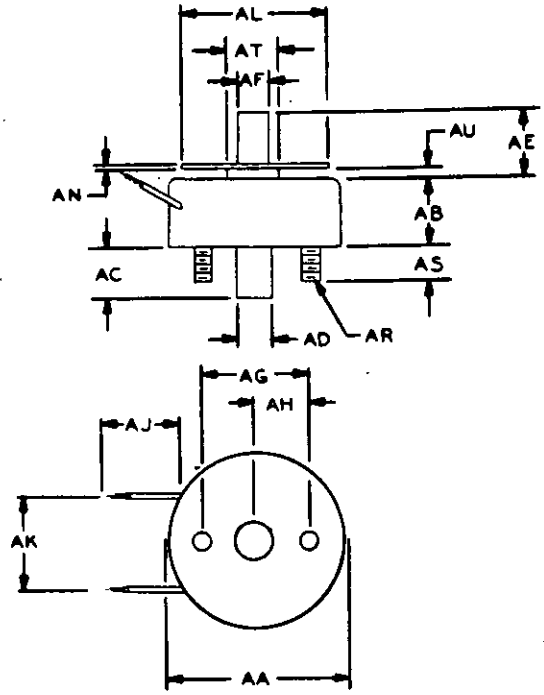


024-10-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

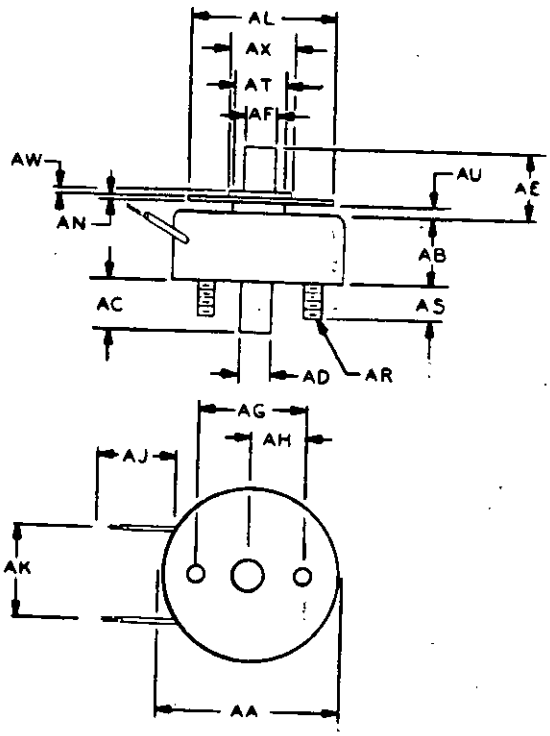


024-10-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

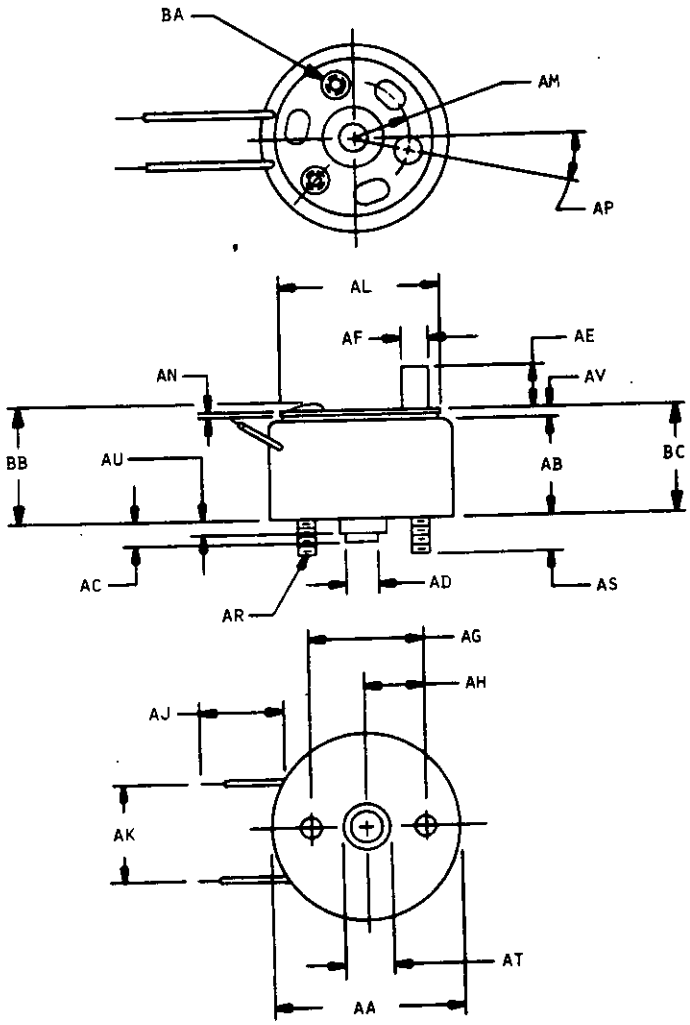


024-10-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

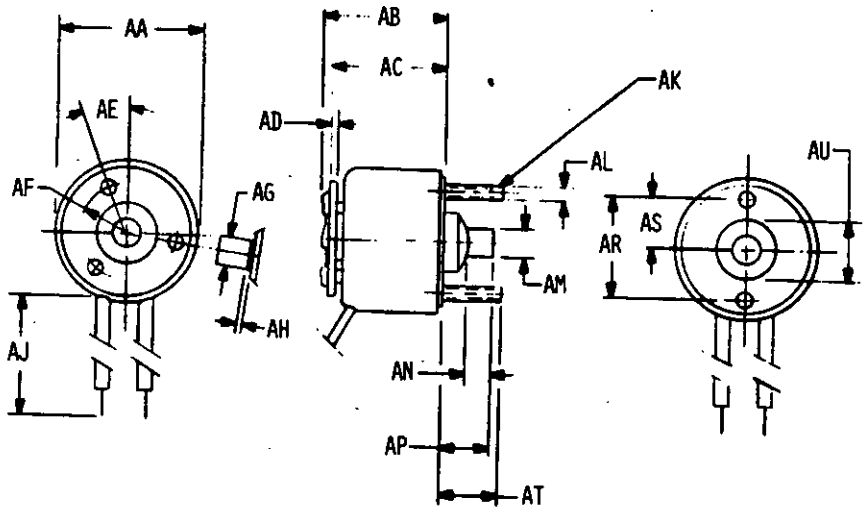


024-10-9

Source: https://assist.dla.mil/ -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

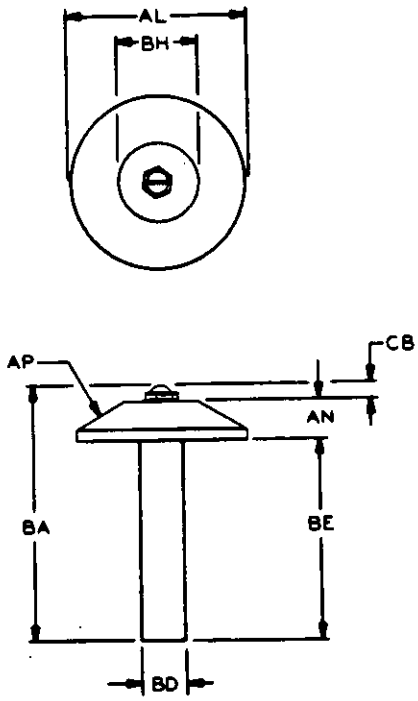



024-11-1

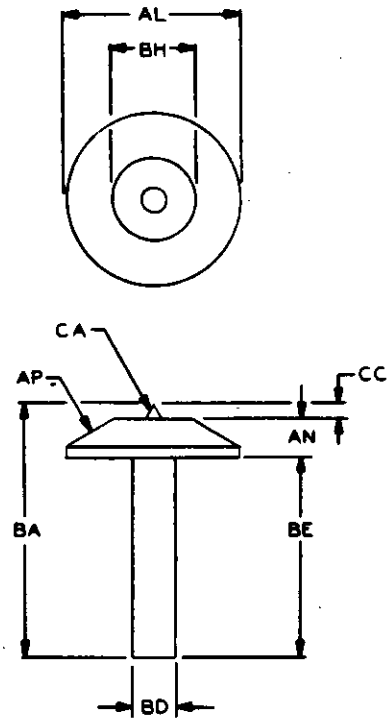


024-11-2


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.





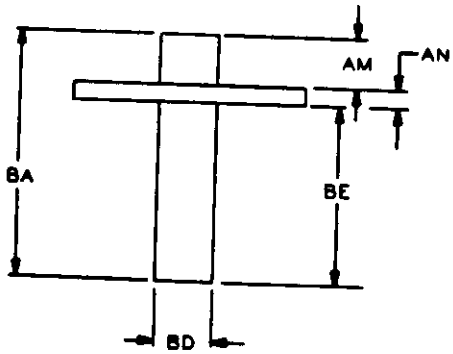


024-11-3

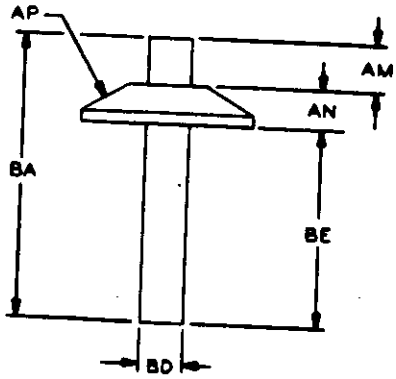


024-11-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

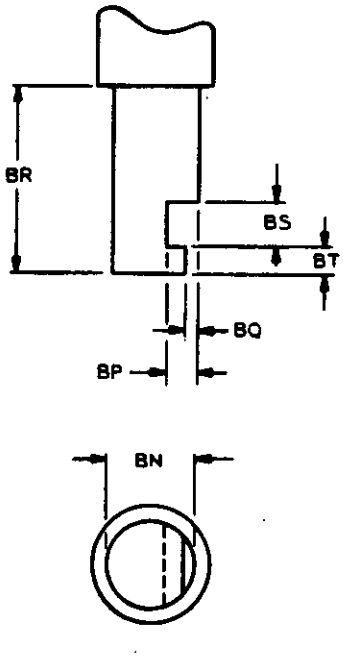


024-12-1

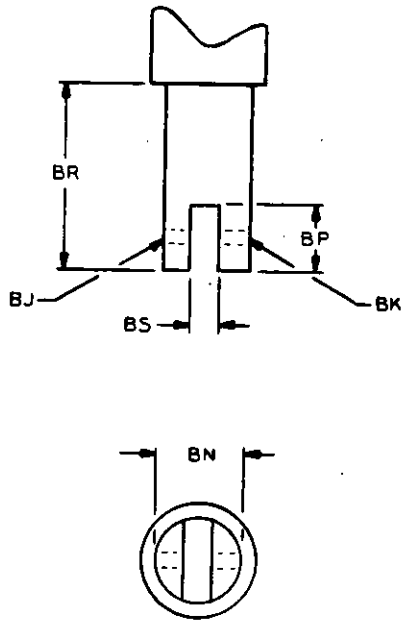


024-12-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

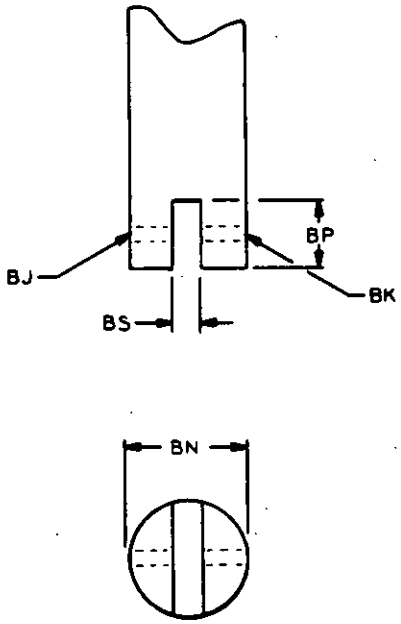


024-12-3

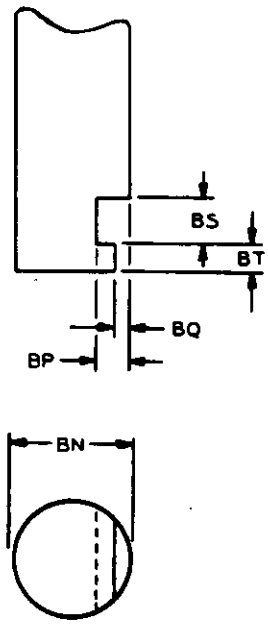


024-12-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

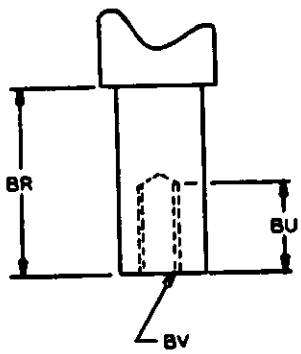


024-12-5




024-12-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.



024-13-1



024-13-2




024-13-3




024-13-4


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.




024-13-5



024-13-6




024-13-7




024-13-8


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.




024-13-9



024-13-10




024-13-11



024-13-12

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

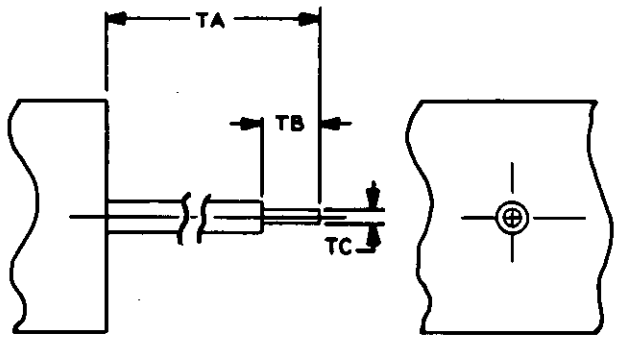

024-14-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	12	1414	98	1511	58	1660	32
0102	12	1416	98	1520	62	1661	36
0103	12	1418	96	1522	60	1671	22
0104	12	1419	98	1523	60	1729	26
0105	12	1420	98	1524	60	1731	26
0107	14	1421	98	1533	104	1881	20
0108	14	1426	112	1534	104	1896	18
0700	12	1427	112	1535	108	2010	70
0800	12	1428	112	1536	108	2201	22
1004	12	1429	62	1537	108	2243	24
1005	12	1430	112	1539	80	2244	24
1006	12	1431	112	1545	110	2245	26
1008	12	1432	64	1546	110	2290	26
1009	18	1433	96	1548	44	2948	20
1371	58	1435	110	1549	46	2950	20
1372	62	1436	110	1557	44	2952	20
1373	60	1438	112	1558	44	2956	22
1374	110	1439	114	1564	18	2958	22
1375	96	1446	104	1565	18	2960	22
1376	60	1447	104	1566	18	2962	22
1377	60	1448	104	1572	20	2964	22
1378	60	1449	64	1574	34	2966	22
1380	58	1452	112	1576	38	2968	24
1381	62	1453	112	1583	20	2970	24
1383	62	1455	102	1595	18	2972	96
1384	58	1456	102	1597	20	2974	24
1386	58	1458	102	1598	20	2976	24
1387	58	1459	112	1599	20	2978	24
1391	64	1462	114	1600	22	2980	56
1394	62	1463	102	1620	18	2982	24
1395	64	1466	106	1621	20	2984	100
1396	62	1467	106	1624	26	2986	24
1397	64	1469	102	1630	30	2988	24
1400	62	1470	106	1637	24	2992	100
1404	62	1473	102	1638	24	2994	26
1406	64	1475	106	1642	22	2996	26
1407	58	1476	106	1643	22	2998	26
1411	98	1490	106	1657	30	3002	26
1412	98	1497	60	1658	36	3006	28
1413	96	1498	60	1659	36	3008	28

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3010	28	3106	42	3192	108	4722	100
3012	36	3108	74	3194	114	4723	100
3014	30	3110	80	3196	114	4729	108
3018	30	3112	102	3198	90	4730	108
3020	36	3114	102	3200	90	4731	108
3022	36	3116	102	3202	90	4765	78
3024	32	3118	102	3204	92	4766	78
3026	36	3120	106	3206	92	4770	78
3028	36	3122	106	3208	92	4771	78
3030	32	3124	106	3210	94	4772	78
3032	32	3126	106	3212	94	4773	78
3034	32	3128	110	3214	74	4782	78
3036	32	3130	110	3216	74	4821	80
3038	32	3132	110	3218	96	4829	76
3040	32	3134	110	3220	96	4830	74
3046	34	3136	46	4018	80	4831	76
3048	34	3138	46	4022	56	4834	74
3050	34	3140	46	4051	46	4835	76
3052	34	3144	56	4060	46	4836	74
3054	34	3146	56	4062	46	4838	76
3056	34	3148	46	4063	46	4839	76
3058	34	3150	46	4662	88	4842	54
3062	38	3152	76	4663	88	4843	68
3064	38	3154	76	4664	90	4844	54
3066	38	3156	100	4665	90	4845	54
3068	38	3158	100	4666	88	4846	54
3072	38	3160	104	4667	88	4848	54
3074	38	3162	104	4672	88	4849	48
3076	40	3164	82	4674	88	4850	54
3080	40	3166	82	4675	88	4854	54
3082	40	3168	82	4678	114	4855	54
3084	40	3170	86	4683	88	4856	52
3086	40	3172	86	4707	104	4857	66
3090	40	3174	80	4708	104	4858	66
3092	40	3176	80	4709	104	4859	50
3094	40	3180	100	4713	100	4861	52
3096	40	3182	100	4714	100	4862	52
3100	56	3186	74	4715	100	4863	42
3102	70	3188	74	4717	56	4864	42
3104	42	3190	108	4719	100	4865	42

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4867	54	6205	90	6292	50	6713	72
4868	44	6210	44	6293	50	6790	16
4869	54	6217	90	6294	50	6791	16
4870	56	6218	90	6299	80	6792	16
4872	80	6219	92	6300	48	6793	16
4874	52	6220	92	6308	50	6794	16
4875	52	6221	92	6310	52	6799	16
4878	76	6222	92	6311	50	6801	16
4884	48	6224	92	6312	50	6870	116
4885	48	6225	92	6315	94	6873	12
4886	48	6226	42	6316	96	6874	14
4891	50	6228	90	6318	92	6920	74
4892	48	6229	90	6319	92	6921	72
4893	44	6231	94	6323	94	6922	74
4894	48	6233	44	6327	84	6923	72
4897	56	6234	94	6338	84	6924	74
4900	50	6235	94	6339	84	6929	70
4902	52	6236	94	6340	84	6930	70
4906	48	6237	94	6341	84	6939	72
4908	48	6238	94	6342	84	6941	14
4952	80	6239	44	6343	84	6942	16
4956	80	6250	42	6344	84	6943	28
4958	78	6251	42	6345	84	6944	30
4959	78	6263	44	6346	84	6945	30
4960	80	6264	44	6347	84	6946	30
4975	114	6265	44	6348	86	6991	118
4976	114	6267	56	6349	86	6992	118
4977	114	6272	42	6359	58	6993	118
4978	108	6273	42	6369	12	6994	118
4979	108	6279	76	6371	66	6995	118
4980	64	6280	50	6372	116	7001	116
4981	64	6282	68	6696	70	7002	116
4983	66	6283	68	6697	72	7003	116
4984	66	6284	68	6698	72	7004	116
4985	64	6285	68	6699	72	7005	116
4986	64	6286	68	6700	72	7021	28
4991	64	6287	68	6701	72	7022	28
5000	54	6288	68	6706	72	7023	28
5297	70	6289	68	6707	72	7024	28
6200	104	6291	66	6710	72	7305	84

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
7306	84						
7307	86						
7308	86						
7309	86						
7311	82						
7312	82						
7313	82						
7315	82						
7316	82						
7317	82						
7318	82						
7345	42						
7572	18						
7577	18						
7629	116						
7630	116						

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Acceleration	42
Additional Part Marking	118
Additional Requirements	116
Altitude	16
Aperture Cards Required	14
Applicable Documents	118
Base Document	12
City, State, Zip	12
Company Name/Command	12
Configuration	18
Contract Number/Office Symbol	12
Control	12
DC Resistance	46
Definition of Hermetic Sealing	118
Design and Construction	22
Dielectric Withstanding Voltage at Reduced Barometric Pressure	48
Dielectric Withstanding Voltage at Sea level	52
Electrical Ratings	18
Explosion	56
Format	12
Government Design Activity FSCM	12
Insulation Resistance	58
Moisture Resistance	62
Mounting Hardware	116
Nomenclature	118
Notes	118
Operating Characteristics	30
Packaging	118
Part Marking	116
Part Number	14
Part Number Cross-Reference	118
Phone Number	12
Quality Assurance Provisions	118

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Radiographic	66
Reliability Screening (Burn-in, Ageing, Conditioning, Stabilization, Load Life, Overload)	70
Requester FSCM	12
Requester's Name	12
Resistance to Solvents	74
Revision of AEDPS Document (Number)	14
Salt Spray	76
Sand and Dust	78
Scope	14
Shock	82
Solderability	88
Source Table	14
Street/Building	12
Superseded Document	118
System Application	12
Temperature	16
Temperature, High	90
Temperature, Low	92
Terminal Strength	96
Thermal Shock (Temperature Cycling)	100
Units of Measure	14
Vibration, High Frequency	102
Vibration, Low Frequency	106
Vibration, Random	110
Weight/Mass	28
Workmanship	116

☆U.S. GOVERNMENT PRINTING OFFICE: 1983-605-034/4164

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-STD-35-13A(MI)	SOLENOIDS

3a. NAME OF SUBMITTING ORGANIZATION

b. ADDRESS *(Street, City, State, ZIP Code)*

4. TYPE OF ORGANIZATION *(Mark one)*

- ☐ VENDOR
- ☐ USER
- ☐ MANUFACTURER
- ☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.