MIL-STD-35-32B(MI)

27 September 1985

SUPERSEDING
MIL-STD-35-32A(MI)
2 January 1974

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

PINS AND KEYS

NO DELIVERABLE DATA
REQUIRED BY THIS DOCUMENT

AREA-EDS

DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE ; DISTRIBUTION IS UNLIMITED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL COMMAND
ALEXANDRIA, VA 22333

Pins and Keys
Automated Engineering
Document Preparation System

MIL-STD-35-32B(MI)

1. This Military Standard is approved for use by AMC, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Command, ATTN: AMSMI-EDC, Redstone Arsenal, Alabama 35898, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currenversion before use.

FOREWORD

1. The purpose of MIL-STD-35-32B(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions (MSE) for Pins and Keys.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedure described in the basic document (DOD-STD-35) be followed explicitly in order to produce a document suitable for procurement. Information, which is standard for all dash-numbered parts, has been included in the basic document. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	6
	2.1	Issues of documents	6
	2.2	Other publications	6
	3.	DEFINITIONS	8
	4.	GENERAL REQUIREMENTS	9
	4.1	Introduction	9
	4.2	Specification Requirements Sheet (SRS)	9
	4.3	Configuration	9
	4.3.1	Dimensions	9
	4.3.2	Illustrations	9
	4.4	Units of measure	9
	5.	DETAILED REQUIREMENTS	10
	5.1	Introduction	10
	5.2	MSE Formats	10
	5.3	Referenced documents	10
	5.4	Tabulation	10
	5.5	Keyword Code Index (KCI) and Standard Paragraphs	13
	5.5.1	Interrelationship of Codes	13
	5.5.2	Automatic MSE Data	13
	5.5.3	DOD-STD-35 Tables	13

TABLES

Table	I.	Title Index	2
	II.	Tabulation Candidates	11

APPENDICES

Appendix	A.	Illustrations	58
	B.	Characteristic Code Index	74
		Index	77

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the currentversion before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS) provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for Pins and Keys.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirements Sheet (SRS) which will be used to generate a MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts, have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for a MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSEs for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes, listed in the Title Index and entered on a SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE listed in the Title Index is compatible with the document(s) listed, with that title, under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference. When more than one document is listed for a MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
KEY, MACHINE	160012	OO-K-220	
		MS20065	RECT. IN CROSS SECTION, BOTH ENDS SQUARE
		MS20066	SQUARE IN CROSS SECTION, BOTH ENDS SQUARE
		MS20067	SQUARE IN CROSS SECT., ONE END SQUARE, OTHER END ROUND
		MS20068	SQUARE IN CROSS SECTION, BOTH ENDS ROUND
		MS51935	GIB HEAD
KEY, WOODRUFF	160013	MIL-K-27545	ALLOY STEEL
		MS35756	STEEL ALLOY /W KEYWAY SLOT DIM
		MS9841	CHAMFERED CRES AMS5640
PIN, COTTER	160001	FF-P-386	SPLIT
		MS9245	CRES AMS7211
		MS24665	SPLIT
PIN, DRIVE, POWER ACTUATED	160003	FF-P-395	PIN DRIVE, GUIDED
PIN, HINGE	160005	MS20253	STEEL
PIN, GROOVED, HEADLESS	160004	MIL-P-20700	LONGITUDINAL GROOVE
		MS35671	TAPER GROOVE, CARBON STEEL
		MS35672	TAPER GROOVE, CRES
		MS35673	TAPER GROOVE, BRASS
		MS35674	STRAIGHT GROOVE CARBON STEEL
		MS35675	STRAIGHT GROOVE CRES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
		MS35676	STRAIGHT GROOVE BRASS
		MS35677	CENTER GROOVE, CARBON STEEL
		MS35678	CENTER GROOVE, CRES
		MS35679	CENTER GROOVE, BRASS
PIN, LOCK	160006	MIL-P-23460	SELF RETAINING, POSITIVE LOCK
		MS17984	SINGLE ACTING, BUTTON HANDLE
		MS17985	SINGLE ACTING, "T" HANDLE
		MS17986	SINGLE ACTING, "L" HANDLE
		MS17987	SINGLE ACTING, RING HANDLE
		MS17988	DOUBLE ACTING, "T" HANDLE
		MS17989	DOUBLE ACTING, "L" HANDLE
		MS17990	DOUBLE ACTING, RING HANDLE
		NAS1332	POSITIVE LOCKNG, SINGLE AND DOUBLE ACTING
		NAS1333 THRU NAS1346	POSITIVE LOCKNG, SINGLE ACTING
		NAS1353 THRU NAS1366	POSITIVE LOCKNG, DOUBLE ACTING
PIN, SPRING	160008	MIL-P-10971	TUBULAR (COILED AND SLOTTED)
		MS16562	SLOTTED
		MS39086	HEAVY DUTY
		MS51923	STANDARD DUTY
		MS51987	COILED, LIGHT DUTY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
		NAS561	SLOTTED AND COILED, HEAVY DUTY
		NAS1407	COILED
		MS9047	STEEL,PHOSPHATE FINISH
		MS9048	STEEL, CADMIUM PLATED
		MS171401 THRU MS171900	CRES
PIN, STRAIGHT, HEADED	160009	MIL-P-5673	STRAIGHT, HEADED
		MS20392	DRILLED SHANK
		MIL-P-27235	(CLEVIS PINS)
		MS35810	STEEL, CADMIUM OR ZINC PLATED
		MIL-P-14250	SLOTTED TEMPLET STAND
		MS9463	.124 DIAMETER
		MS9464	.186 DIAMETER
		MS9465	.248 DIAMETER
		MS9466	.311 DIAMETER
		MS9467	.373 DIAMETER
		MS9468	.436 DIAMETER
		MS9842	.0937 DIAMETER
		MS9843	.1249 DIAMETER
		MS9844	.1874 DIAMETER
		MS9845	.2499 DIAMETER
		MS9846	.3124 DIAMETER
		MS9847	.3749 DIAMETER
		MS9848	.4999 DIAMETER
		AN121600 THRU AN121650	.125 NOMINAL
		AN121651 THRU AN121700	.187 NOMINAL
		AN121701 THRU AN121750	.250 NOMINAL
		AN121751 THRU AN121800	.312 NOMINAL
		AN121801 THRU AN121850	.375 NOMINAL
		AN121851 THRU AN121925	.500 NOMINAL

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
PIN, STRAIGHT, HEADLESS	160002	MIL-P-14250	SLOTTED TEMPLET STUD
		MS9105	LOCK
		MS9164	OVERSIZE
		MS9389	LOCK
		MS9390	DOWEL STANDARD AND OVERSIZE
		MS9486	LOCK
		MIL-P-21143	DOWEL, OVER NOMINAL SIZE
		MS16555	DOWEL
		MS16556	DOWEL
		MS20253	HINGE
		MS51932	DRILLED FOR COTTER PINS
		AN122676 THRU AN122775	STEEL
		NAS607	DOWEL
PIN, TAPERED, PLAIN	160010	MIL-P-16610	PLAIN
		MS24692	PLAIN
		AN385	PLAIN
PIN, TAPERED, THREADED	160011	AN386	THREADED

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in cataloging handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

FEDERAL

FF-P-395	Pin, Drive, Guided; and Pin Drive, Powder Actuated.

MILITARY

MIL-I-17214	Indicator, Permeability, Low-MU (Go-No-Go)
MIL-P-23460	Pin, Quick Release, Self-Retaining, Positive Locking

STANDARDS

MILITARY

MIL-STD-810	Environmental Test Methods
MIL-STD-1312	Fasteners, Test Methods

(Copies of specifications, standards, drawings, and publications required by contractor in connection with specific procurement functions, should be obtained from the procuring activity or as directed by the Contracting Officer.)

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

OTHER PUBLICATIONS

ANSI B46.1	Surface Texture, Roughness Waviness & Lay
ASTM E380	Metric Practice Guide

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

H28 Screw-Thread Standards for Federal Services

(Copies of standards and handbooks, required by suppliers in connection with specific procurement functions, should be obtained from the procuring activity or as directed by the Contracting Officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

3.1 Definitions contained in DOD-STD-35 are applicable to Pins and Keys.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare a SRS for Pins and Keys, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Pins and Keys.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Pins and Keys.

4.3.2 Illustrations. Illustrations applicable to Pins and Keys are contained in Appendix A to this document.

4.4 Units of measure. The international System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g., weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2, of the forthcoming MSE, are contained in DOD-STD-35.

5.4 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table II provides codes for column headings which may be used for Pins and Keys characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either inches or millimeters.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currentversion before use.

TABLE II. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
7022	WEIGHT (OZ) EACH	7023	WEIGHT (LB) EACH	7021	MASS (G) EACH
7024	MASS (KG) EACH	7041	WEIGHT (OZ) 100 COUNT	7042	WEIGHT (LB) 100 COUNT
7043	MASS (G) 100 COUNT	7044	MASS (KG) 100 COUNT		

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

5.5 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on a SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part's unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.5.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code(s) is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value, entered with a code, becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.5.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked, by data base logic, to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.5.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT.	0700
ONE SECTION DOCUMENT.	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1004	USER FSCM 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	Ø1Ø7
REVISION OF AEDPS DOCUMENT (NUMBER)	Ø1Ø8
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026Ø1-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6874 THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).

0107

0108 0108.

SCOPE.

SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.

PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.

PART NUMBER. THE PART NUMBER FOR THE ITEMS IS (THE SAME AS THE NUMBER OF THIS DOCUMENT) PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

6941 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.

6942 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
*UNITS (SELECT ONE)	
U.S.	
INCHES.	7572
SI	
MILLIMETERS.	7577
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950
NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.	
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	
MATERIALS (SEE TABLE VI, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VI IS USED.	
FINISHES (SEE TABLE VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

CONFIGURATION.

1009 CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.

7572 ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.

7577 ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.

4950 ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.

MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
METALS	
DISSIMILAR METALS.	7580
DESIGN AND CONSTRUCTION	
CONCENTRICITY: MAXIMUM PIN DEVIATION FROM SHAFT AXIS (SELECT ONE)	
U.S.	
(INCHES)	1566
SI	
(MILLIMETERS)	1567
MAGNETIC PERMEABILITY PER MIL-T-17214	
MAXIMUM (VALUE)	1572
HEAD SHANK, ROTATIONAL PLAY	
MAXIMUM (DEGREES)	1564
SCREW THREADS (DES)	1570
PER (DOC DES)	1571

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

7580 METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.

DESIGN AND CONSTRUCTION

1566 THE POINT OF PIN SHALL NOT DEVIATE MORE THAN 1566 INCH(S) FROM THE SHAFT AXIS.

1567 THE POINT OF PIN SHALL NOT DEVIATE MORE THAN 1567 MILLIMETER(S) FROM THE SHAFT AXIS.

1572 THE MAGNETIC PERMEABILITY SHALL BE NOT MORE THAN 1572 IN ACCORDANCE WITH MIL-I-17214.

1564 ROTATIONAL PLAY BETWEEN THE HEAD AND SHANK OF THE PIN SHALL BE NOT GREATER THAN 1564 DEGREE(S).

1570 THE SCREW THREAD SHALL BE 1570.

1571 THE SCREW THREAD SHALL BE IN ACCORDANCE WITH 1571.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHANK STRAIGHTNESS, MAXIMUM DEVIATION (SELECT ONE)	
U.S.	
(INCHES)	1562
SI	
(MILLIMETERS)	1563
SHANK OUT-OF-ROUNDNESS, MAXIMUM (SELECT ONE)	
U.S.	
(INCHES)	1568
SI	
(MILLIMETERS)	1569
LOCKING DEVICE PER MIL-P-23460 (SELECT ONE)	
TYPE I, SINGLE ACTION.	1586
TYPE II, DOUBLE ACTION.	1588

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1562	THE MAXIMUM DEVIATION FROM STRAIGHTNESS OF THE PIN SHALL BE 1562 INCH(S).
1563	THE MAXIMUM DEVIATION FROM STRAIGHTNESS OF THE PIN SHALL BE 1563 MILLIMETER(S).
1568	THE PIN DIAMETER SHALL VARY NOT MORE THAN 1568 INCH(S) ABOUT THE LONGITUDINAL AXIS.
1569	THE PIN DIAMETER SHALL VARY NOT MORE THAN 1569 MILLIMETER(S) ABOUT THE LONGITUDINAL AXIS.
1586	THE LOCKING DEVICE TYPE SHALL BE TYPE I, SINGLE ACTING PER MIL-P-23460.
1588	THE LOCKING DEVICE TYPE SHALL BE TYPE II, DOUBLE ACTING PER MIL-P-23460.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WEIGHT/MASS	
MAXIMUM WEIGHT/MASS PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024
MAXIMUM WEIGHT/MASS PER 100 (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7041
(POUNDS)	7042
SI (SELECT ONE)	
(GRAMS)	7043
(KILOGRAMS)	7044

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

7022 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).

7023 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).

7021 MAXIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).

7024 MAXIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).

7041 MAXIMUM WEIGHT PER 100. THE WEIGHT PER 100 UNITS SHALL BE NOT GREATER THAN 7041 OUNCE(S).

7042 MAXIMUM WEIGHT PER 100. THE WEIGHT PER 100 UNITS SHALL BE NOT GREATER THAN 7042 POUND(S).

7043 MAXIMUM MASS PER 100. THE MASS PER 100 UNITS SHALL BE NOT GREATER THAN 7043 GRAM(S).

7044 MAXIMUM MASS PER 100. THE MASS PER 100 UNITS SHALL BE NOT GREATER THAN 7044 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACTUATING FORCE (RELEASE MECHANISM)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	1602
AS FOLLOWS:	
RELEASE MECHANISM SHALL REMAIN LOCKED.	1604
ACTUATING FORCE	
MINIMUM (SELECT ONE)	
U.S.	
(POUNDS)	1606
SI	
(NEWTONS)	1605
MAXIMUM (SELECT ONE)	
U.S.	
(POUNDS)	1608
SI	
(NEWTONS)	1607

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1602 ACTUATING FORCE (RELEASE MECHANISM). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1602.

ACTUATING FORCE (RELEASE MECHANISM). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

1604 RELEASE MECHANISM SHALL AUTOMATICALLY REMAIN IN THE LOCKED POSITION FOLLOWING TEST.

1606 THE ACTUATING FORCE REQUIRED TO RELEASE THE LOCKING DEVICE SHALL BE NOT LESS THAN 1606 POUND(S).

1605 THE ACTUATING FORCE REQUIRED TO RELEASE THE LOCKING DEVICE SHALL BE NOT LESS THAN 1605 NEWTON(S).

1608 THE ACTUATING FORCE REQUIRED TO RELEASE THE LOCKING DEVICE SHALL BE NOT GREATER THAN 1608 POUND(S).

1607 THE ACTUATING FORCE REQUIRED TO RELEASE THE LOCKING DEVICE SHALL BE NOT GREATER THAN 1607 NEWTON(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1594
PER MIL-P-23460.	1595
TEST LOAD (SELECT ONE)	
U.S.	
(POUNDS)	1596
SI	
(KILOGRAMS)	1597
TEST TEMPERATURE (DEGREES CELSIUS)	1598
BALL RETENTION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1648
LOCKING DEVICE RETAINED IN SHANK TO WITHSTAND MINIMUM PUSHOUT FORCE.	1650
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1642

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currentversion before use.

CHAR
CODE STANDARD PARAGRAPH

1594 ACTUATING FORCE (RELEASE MECHANISM). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1594.

1595 ACTUATING FORCE (RELEASE MECHANISM). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-P-23460.

1596 TEST LOAD SHALL BE 1596 POUND(S).

1597 TEST LOAD SHALL BE 1597 KILOGRAM(S).

1598 TEST TEMPERATURE SHALL BE 1598 DEGREES CELSIUS.

1648 BALL RETENTION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1648.

1650 BALL RETENTION. THE BALLS USED AS A LOCKING DEVICE SHALL BE RETAINED IN THE SHANK OF THE PIN TO WITHSTAND THE MINIMUM PUSHOUT FORCE.

1642 BALL RETENTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1642.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PER MIL-P-23400.	1643
BALL PUSHOUT FORCE MINIMUM (SELECT ONE)	
U.S.	
(POUNDS)	1644
SI	
(NEWTONS)	1645
BEND (BRITTLENESS)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1812
PINS OR STUDS SHALL NOT FRACTURE.	1814
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1802
PER FF-P-395.	1803
SHANK BEND ANGLE (DEGREES)	1804
BEND FIXTURE DIAMETER (SELECT ONE)	
U.S.	
(INCHES)	1806

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1643	BALL RETENTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-P-23460.
1644	THE MINIMUM BALL PUSHOUT FORCE SHALL BE 1644 POUND(S).
1645	THE MINIMUM BALL PUSHOUT FORCE SHALL BE 1645 NEWTON(S).
1812	BEND (BRITTLENESS). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1812.
1814	BEND (BRITTLENESS). THE PINS OR STUDS SHALL NOT FRACTURE AS A RESULT OF BENDING TEST.
1802	BEND (BRITTLENESS). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1802.
1803	BEND (BRITTLENESS). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH FF-P-395.
1804	THE SHANK SHALL BE BENT THROUGH AN ANGLE OF 1804 DEGREE(S).
1806	THE FIXTURE DIAMETER SHALL BE 1806 INCH(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SI	
(MILLIMETERS)	1807
TEST TEMPERATURE (DEGREES CELSIUS)	1808
CHEMICAL ANALYSIS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1762
AS FOLLOWS:	
SUPPLIER CERTIFICATION.	1764
MATERIAL COMPOSITION.	1766
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1752
PER (DOC DES)	1754
METHOD (NUMBER)	1756
MATERIAL COMPLIANCE.	1758

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currentversion before use.

CHAR
CODE STANDARD PARAGRAPH

1807 THE FIXTURE DIAMETER SHALL BE 1807 MILLIMETER(S).

1808 THE TEST TEMPERATURE SHALL BE 1808 DEGREES CELSIUS.

1762 CHEMICAL ANALYSIS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1762.

CHEMICAL ANALYSIS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

1764 SUPPLIER CERTIFICATION MAY BE ACCEPTED IN LIEU OF A SPECIFIC CHEMICAL ANALYSIS.

1766 COMPOSITION OF THE MATERIAL SHALL BE AS SPECIFIED.

1752 CHEMICAL ANALYSIS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1752.

1754 CHEMICAL ANALYSIS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1754.

1756 THE TEST METHOD SHALL BE 1756 METHOD.

1758 SELECTED LOT SAMPLES SHALL BE ANALYZED TO DETERMINE COMPLIANCE WITH THE MATERIAL SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DISTORTION (RELEASE MECHANISM)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1618
AS FOLLOWS:	
REMAIN IN LOCKED POSITION.	1619
DEFORMATION SHALL NOT CONSTITUTE FAILURE.	1620
NO EVIDENCE OF FAILURE.	1621
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1612
PER MIL-P-23460.	1613
TEST LOAD MINIMUM (SELECT ONE)	
U.S.	
(POUNDS)	1614
SI	
(KILOGRAMS)	1615

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1618 DISTORTION (RELEASE MECHANISM). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1618.

DISTORTION (RELEASE MECHANISM). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

1619 THE RELEASE MECHANISM SHALL AUTOMATICALLY REMAIN IN THE LOCKED POSITION.

1620 DEFORMATION OF RING OR HANDLE OF PIN SHALL NOT CONSTITUTE A FAILURE.

1621 THE RELEASE MECHANISM, RING OR HANDLE SHALL SHOW NO EVIDENCE OF FAILURE.

1612 DISTORTION (RELEASE MECHANISM). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1612.

1613 DISTORTION (RELEASE MECHANISM). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-P-23460.

1614 THE TEST LOAD SHALL BE NOT LESS THAN 1614 POUND(S).

1615 THE TEST LOAD SHALL BE NOT LESS THAN 1615 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DUST	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4724
NO EVIDENCE OF PHYSICAL DAMAGE.	1510
NO EVIDENCE OF DUST PENETRATION.	4801
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4895
PER MIL-STD-810, METHOD 510.	4953
SPECIMEN ORIENTATION SHALL BE CHANGED DURING TEST.	1539
SECOND 6-HOUR TEST IMMEDIATELY FOLLOWING TEMPERATURE STABILIZATION IN STEP 2.	4956
STEP 2 AND STEP 3 TEMPERATURE (DEGREES CELSIUS)	4840
ENDURANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1672
REMAIN IN THE LOCKED POSITION.	1674

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
4724	DUST. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4724.
1510	DUST. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4801	THERE SHALL BE NO EVIDENCE OF DUST PENETRATION.
4895	DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4895.
4953	DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 510 OF MIL-STD-810.
1539	ORIENTATION SHALL BE CHANGED DURING THE TEST.
4956	THE SECOND 6-HOUR TEST SHALL BE PERFORMED IMMEDIATELY AFTER REACHING STABILIZATION IN STEP 2.
4840	THE TEMPERATURE SHALL BE 4840 DEGREES CELSIUS FOR STEPS 2 AND 3.
1672	ENDURANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1672.
1674	ENDURANCE. THE RELEASE MECHANISM SHALL AUTOMATICALLY REMAIN IN THE LOCKED POSITION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1662
PER MIL-P-23460.	1663
OPERATION CYCLES (NUMBER)	1664
HARDNESS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1842
AS FOLLOWS:	
*HARDNESS TESTER (NAME)	1844
*HARDNESS SCALE (DES)	1846
*HARDNESS VALUE	
*MINIMUM (NUMBER)	1848
*MAXIMUM (NUMBER)	1849
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1832
PER (DOC DES)	1834
TEST METHOD (NUMBER)	1836

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1662 ENDURANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1662.

1663 ENDURANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-P-23460.

1664 NUMBER OF CYCLES OF OPERATION SHALL BE 1664.

1842 HARDNESS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1842.

HARDNESS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

1844 THE HARDNESS TESTER SHALL BE 1844.

1846 HARDNESS SCALE 1846 SHALL APPLY.

1848 THE MINIMUM HARDNESS VALUE SHALL BE 1848.

1849 THE MAXIMUM HARDNESS VALUE SHALL BE 1849.

1832 HARDNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1832.

1834 HARDNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1834.

1836 THE TEST METHOD SHALL BE 1836.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OPERABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1700
AS FOLLOWS:	
OPERABLE WHILE SHEAR LOADED.	1703
REMAIN IN LOCKED POSITION.	1704
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1692
PER MIL-P-23460.	1693
MINIMUM SHEAR LOAD (SELECT ONE)	
U.S.	
(POUNDS)	1696
SI	
(NEWTONS)	1695
MINIMUM DOUBLE SHEAR STRENGTH (PERCENT)	1697

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1700 OPERABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1700.

OPERABILITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

1703 THE RELEASE MECHANISM SHALL BE OPERABLE WHILE THE PIN IS SHEAR LOADED.

1704 THE RELEASE MECHANISM SHALL AUTOMATICALLY REMAIN IN THE LOCKED POSITION FOLLOWING TEST.

1692 OPERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1692.

1693 OPERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-P-23460.

1696 THE MINIMUM SHEAR LOAD SHALL BE 1696 POUND(S).

1695 THE MINIMUM SHEAR LOAD SHALL BE 1695 NEWTON(S).

1697 THE MINIMUM DOUBLE SHEAR STRENGTH SHALL BE 1697 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PENETRATION (TOUGHNESS)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1790
PENETRATE TEST PLATE WITHOUT FRACTURE.	1794
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1772
PER FF-P-395.	1773
PLATE THICKNESS (SELECT ONE)	
U.S.	
(INCHES)	1775
SI	
(MILLIMETERS)	1777
ROUGHNESS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1888
AS FOLLOWS:	

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
1790	PENETRATION (TOUGHNESS). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1790.
1794	PENETRATION (TOUGHNESS). THE PIN OR STUD SHALL PENETRATE THE STEEL TEST PLATE TO THE FULL DEPTH OF THE SHANK WITHOUT FRACTURE.
1772	PENETRATION (TOUGHNESS). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1772.
1773	PENETRATION (TOUGHNESS). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH FF-P-395.
1775	THICKNESS OF THE STEEL TEST PLATE SHALL BE 1775 INCH(S).
1777	THICKNESS OF THE STEEL TEST PLATE SHALL BE 1777 MILLIMETER(S).
1888	ROUGHNESS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1888.
	ROUGHNESS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM SURFACE ROUGHNESS (SELECT ONE)	
U.S.	
(MICROINCHES)	1890
SI	
(NANOMETERS)	1892
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1882
PER ANSIB46.1.	1884
SALT SPRAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4878
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE.	4782
LOCKING DEVICE OPERATIONAL WITHIN ACTUATING FORCE RANGE.	1860
MAXIMUM ALLOWABLE CORROSION (PERCENT)	1864

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1890	THE MAXIMUM SURFACE ROUGHNESS HEIGHT SHALL BE 1890 MICROINCH(S).
1892	THE MAXIMUM SURFACE ROUGHNESS HEIGHT SHALL BE 1892 NANOMETER(S).
1882	ROUGHNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1882.
1884	ROUGHNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ANSIB46.1.
4878	SALT SPRAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4878.
4782	SALT SPRAY. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
1860	THE LOCKING DEVICE RELEASE MECHANISM SHALL OPERATE SATISFACTORILY WITHIN THE APPLICABLE ACTUATING FORCE RANGE.
1864	THE MAXIMUM PERCENT OF CORROSION ALLOWABLE OVER THE TOTAL SURFACE AREA SHALL BE 1864 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4770
PER MIL-STD-1312, METHOD 1.	4768
DURATION OF TEST (HOURS)	4783
DRYING PERIOD (HOURS)	4775
SHEAR STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2022
AS FOLLOWS:	
MINIMUM DOUBLE SHEAR STRENGTH (SELECT ONE)	
U.S.	
(1000 POUNDS PER SQUARE INCH)	2024
SI	
(MEGAPASCALS)	2026
MAXIMUM SINGLE SHEAR STRENGTH (SELECT ONE)	
U.S.	
(1000 POUNDS PER SQUARE INCH)	2028

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4770	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4770.
4768	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH TEST 1 OF MIL-STD-1312.
4783	DURATION OF THE TEST SHALL BE 4783 HOURS.
4775	DRYING PERIOD SHALL BE 4775 HOURS.
2022	SHEAR STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2022.
	SHEAR STRENGTH. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2024	THE DOUBLE SHEAR STRENGTH SHALL BE 2024 THOUSAND POUND(S) PER SQUARE INCH MINIMUM.
2026	THE DOUBLE SHEAR STRENGTH SHALL BE 2026 MEGAPASCAL(S) MINIMUM.
2028	THE SINGLE SHEAR STRENGTH SHALL BE 2028 THOUSAND POUND(S) PER SQUARE INCH MINIMUM.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SI	
(MEGAPASCALS)	2030
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2002
SHEAR TESTING DEVICE.	2004
MAXIMUM TEST LOAD (SELECT ONE)	
U.S.	
(POUNDS)	2006
SI	
(KILOGRAMS)	2008
TEMPERATURE LIMITS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1730
AS FOLLOWS:	
RELEASE MECHANISM OPERABLE AT TEMPERATURE.	1733
ACTUATING FORCE WITHIN RANGE.	1735
RELEASE MECHANISM REMAIN IN LOCKED POSITION	1736

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2030	THE SINGLE SHEAR STRENGTH SHALL BE 2030 MEGAPASCAL(S) MINIMUM.
2002	SHEAR STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2002.
2004	SHEAR STRENGTH. TESTING SHALL BE PERFORMED BY THE USE OF A SUITABLE SHEAR TESTING DEVICE.
2006	THE MAXIMUM TEST LOAD SHALL BE 2006 POUND(S).
2008	THE MAXIMUM TEST LOAD SHALL BE 2008 KILOGRAM(S).
1730	TEMPERATURE LIMITS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1730.
	TEMPERATURE LIMITS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1733	THE QUICK RELEASE MACHANISM SHALL FUNCTION SATISFACTORILY AND BE HAND OPERABLE AT SPECIFIED TEMPERATURES.
1735	THE ACTUATING FORCE REQUIRED SHALL BE WITHIN THE RANGE SPECIFIED.
1736	THE RELEASE MECHANISM SHALL AUTOMATICALLY REMAIN IN THE LOCKED POSITION.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1718
PER MIL-P-23460.	1719
INITIAL TEST TEMPERATURE (DEGREES CELSIUS)	1720
DURATION (HOURS)	1722
SUBSEQUENT TEST TEMPERATURE (DEGREES CELSIUS)	1724
DURATION (HOURS)	1726
TENSILE STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2072
AS FOLLOWS:	
MINIMUM TENSILE STRENGTH PIN (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	2074
SI	
(KILOPASCALS)	2076

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1718	TEMPERATURE LIMITS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1718.
1719	TEMPERATURE LIMITS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-P-23460.
1720	THE INITIAL TEST TEMPERATURE SHALL BE 1720 DEGREES CELSIUS.
1722	DURATION OF INITIAL TEST TEMPERATURE EXPOSURE SHALL BE 1722 HOUR(S).
1724	THE SUBSEQUENT TEST TEMPERATURE SHALL BE 1724 DEGREES CELSIUS.
1726	DURATION OF SUBSEQUENT TEST TEMPERATURE EXPOSURE SHALL BE 1726 HOUR(S).
2072	TENSILE STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2072.
	TENSILE STRENGTH. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2074	THE MINIMUM TENSILE STRENGTH OF PIN SHALL BE 2074 POUND(S) PER SQUARE INCH.
2076	THE MINIMUM TENSILE STRENGTH OF PIN SHALL BE 2076 KILOPASCAL(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MINIMUM TENSILE STRENGTH HANDLE (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	2078
SI	
(KILOPASCALS)	2080
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2052
PER (DOC DES)	2054
MAXIMUM LOAD PIN (SELECT ONE)	
U.S.	
(POUNDS)	2056
SI	
(KILOGRAMS)	2058
MAXIMUM LOAD HANDLE (SELECT ONE)	
U.S.	
(POUNDS)	2060
SI	
(KILOGRAMS)	2062

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2078	THE MINIMUM TENSILE STRENGTH OF PIN HANDLE SHALL BE 2078 POUND(S) PER SQUARE INCH.
2080	THE MINIMUM TENSILE STRENGTH OF PIN HANDLE SHALL BE 2080 KILOPASCAL(S).
2052	TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2052.
2054	TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2054.
2056	THE MAXIMUM LOAD ON THE PIN SHALL BE 2056 POUND(S).
2058	THE MAXIMUM LOAD ON THE PIN SHALL BE 2058 KILOGRAM(S).
2060	THE MAXIMUM LOAD ON THE PIN HANDLE SHALL BE 2060 POUND(S).
2062	THE MAXIMUM LOAD ON THE PIN HANDLE SHALL BE 2062 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-130.	7629
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.

6870 WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.

ADDITIONAL REQUIREMENTS.

7001 (A) 7001.

7002 (B) 7002.

7003 (C) 7003.

7004 (D) 7004.

7005 (E) 7005.

6372 PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.

7629 PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.

ADDITIONAL PART MARKING.

6991 (A) 6991.

6992 (B) 6992.

6993 (C) 6993.

6994 (D) 6994.

6995 (E) 6995.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

CUSTODIANS:
ARMY-MI

USER ACTIVITY:
ARMY-MU

REVIEW ACTIVITIES:
ARMY-AT
ARMY-AV
ARMY-EL
ARMY-ME
ARMY-MR
ARMY-SG
ARMY-WC

PREPARING ACTIVITY:
ARMY-MI


(PROJECT EDS-A349)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.


APPENDIX A

ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

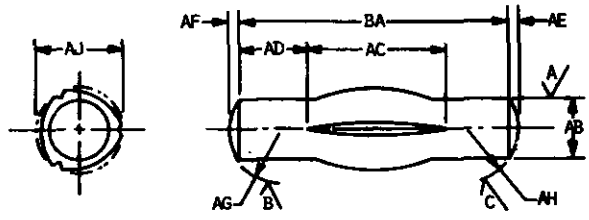


160-01-1

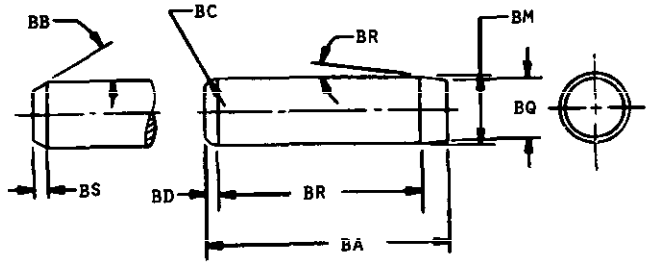


160-01-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

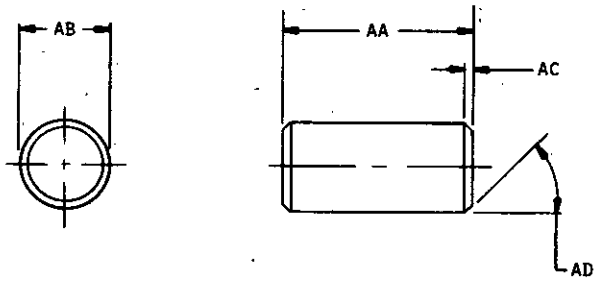


160-01-3

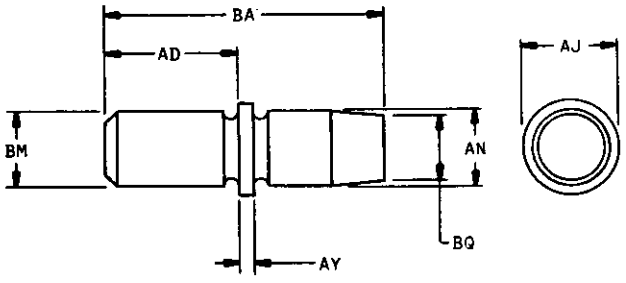


160-01-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

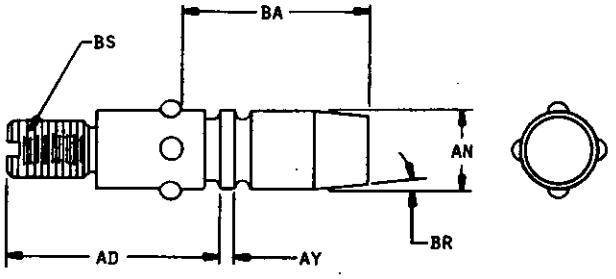


160-01-5

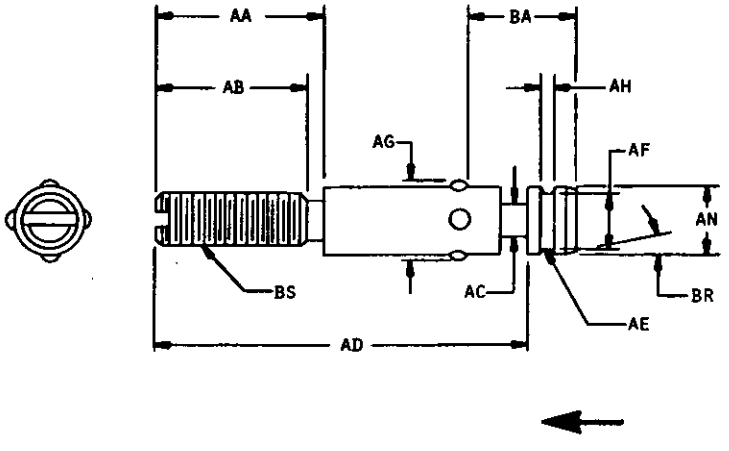


160-01-6

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.




160-01-7




160-01-8

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

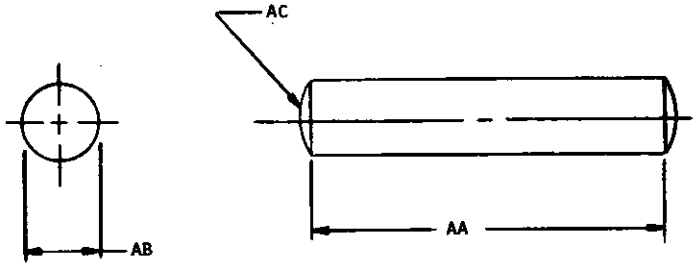


160-01-9

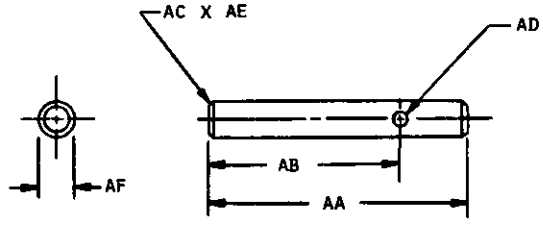


160-01-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

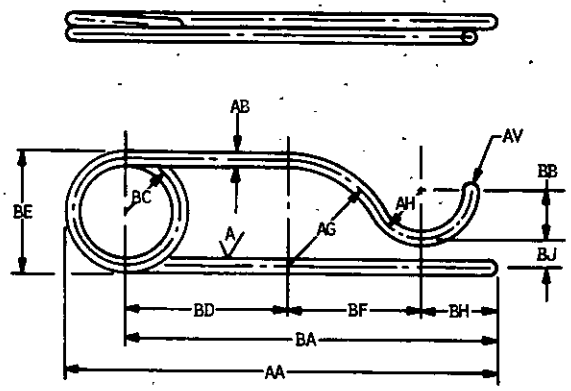



160-02-1

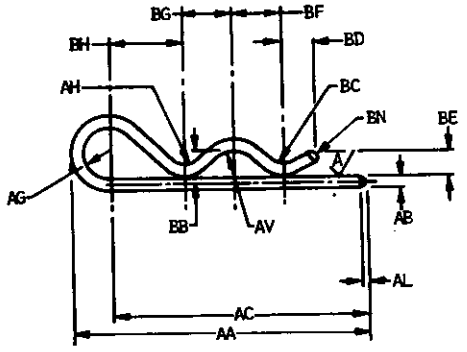

160-02-2


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

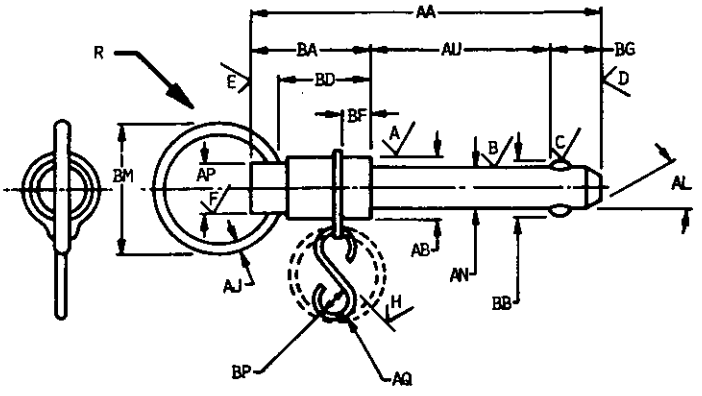




DETAIL R
ALTERNATE HANDLE CONFIGURATION

160-03-1

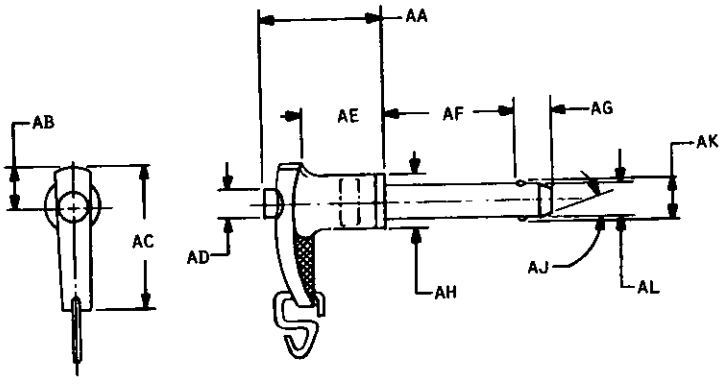


160-03-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

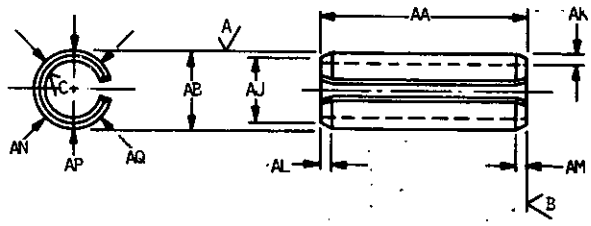


160-04-1

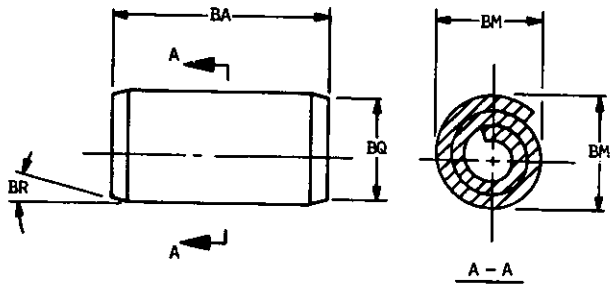


160-04-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

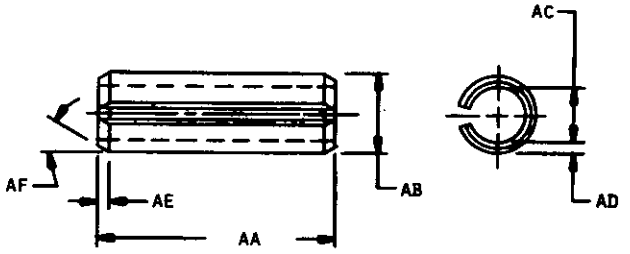


160-04-3

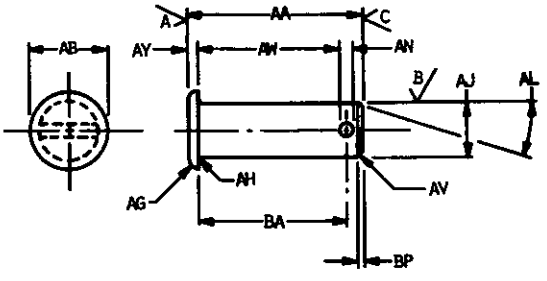



160-05-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

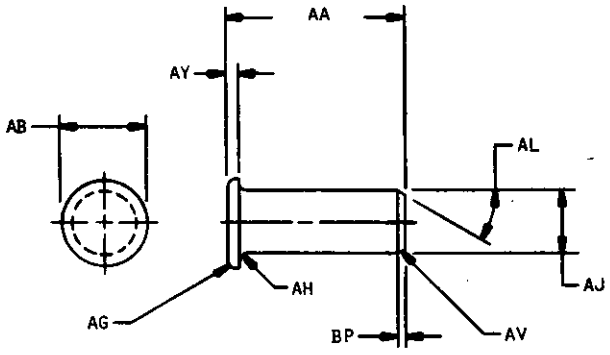

160-05-2

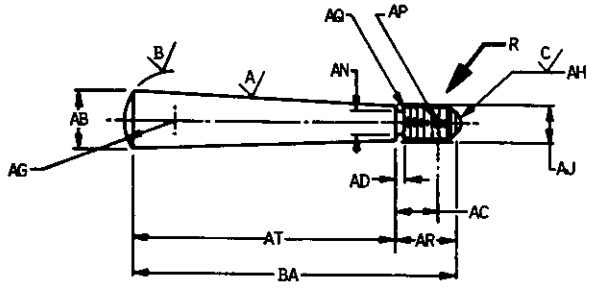





DETAIL R
ALTERNATE

160-06-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

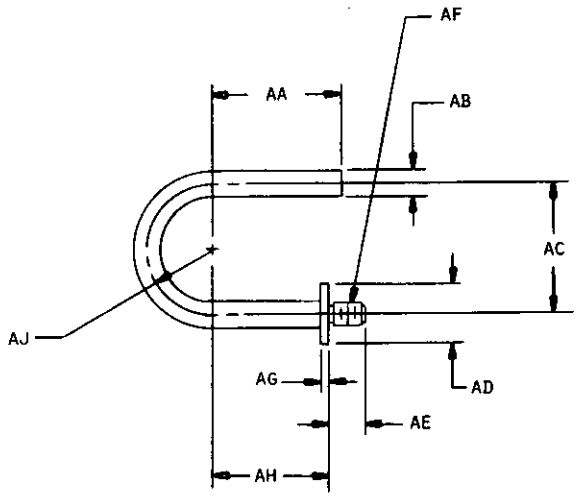


160-06-2

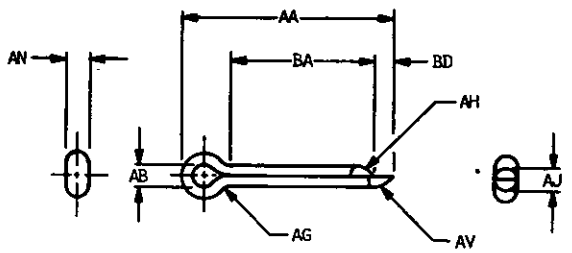


160-07-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

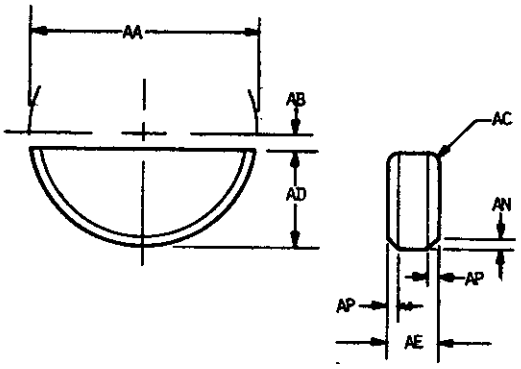


160-10-1

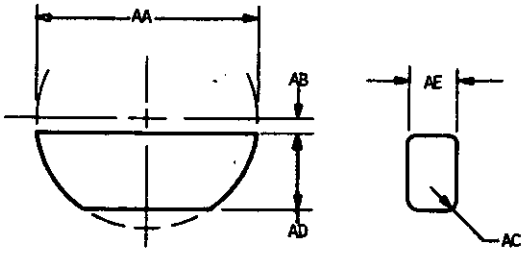


160-10-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

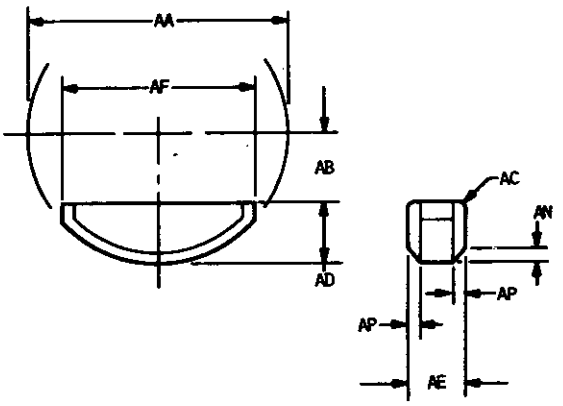


160-10-3

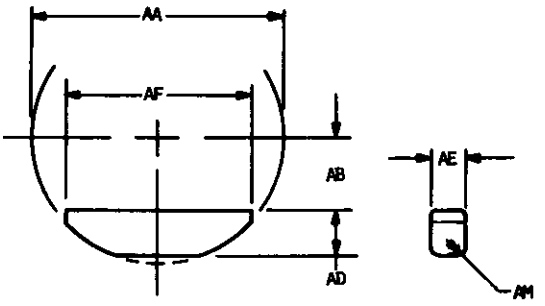


160-10-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

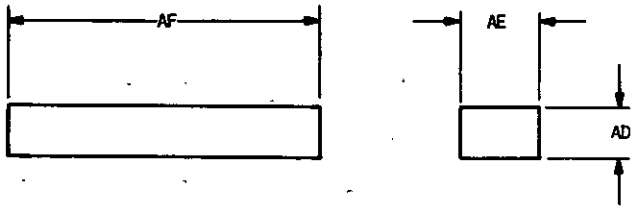


160-11-1

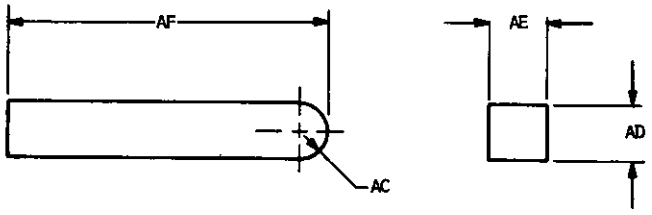


160-11-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

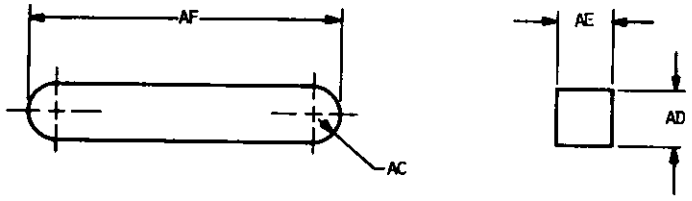

160-11-3

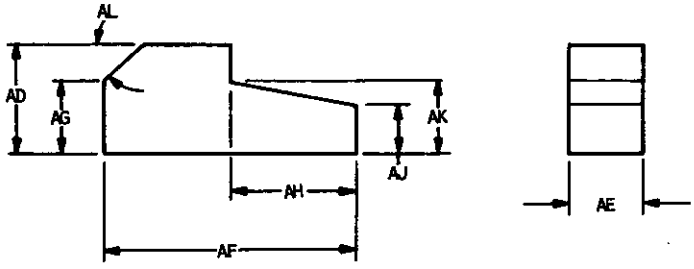

160-11-4

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	14	1613	34	1762	32	2030	48
0102	14	1614	34	1764	32	2052	52
0103	14	1615	34	1766	32	2054	52
0104	14	1618	34	1772	42	2056	52
0105	14	1619	34	1773	42	2058	52
0107	16	1620	34	1775	42	2060	52
0108	16	1621	34	1777	42	2062	52
0700	14	1642	28	1790	42	2074	50
0800	14	1643	30	1794	42	2076	50
1004	14	1644	30	1802	30	2078	52
1005	14	1645	30	1803	30	2080	52
1006	14	1648	28	1804	30	4724	36
1008	14	1650	28	1806	30	4768	46
1009	16	1662	36	1807	32	4770	46
1510	36	1663	38	1808	32	4775	46
1539	36	1664	38	1812	30	4782	44
1562	22	1672	36	1814	30	4783	46
1563	22	1674	36	1832	38	4801	36
1564	20	1692	40	1834	38	4840	36
1566	20	1693	40	1836	38	4878	44
1567	20	1695	40	1842	38	4895	36
1568	22	1696	40	1844	38	4950	18
1569	22	1697	40	1846	38	4953	36
1570	20	1700	40	1848	38	4956	36
1571	20	1703	40	1849	38	6369	14
1572	20	1704	40	1860	44	6372	54
1586	22	1718	50	1864	44	6870	54
1588	22	1719	50	1882	44	6873	14
1594	28	1720	50	1884	44	6874	16
1595	28	1722	50	1888	42	6941	16
1596	28	1724	50	1890	44	6942	16
1597	28	1726	50	1892	44	6991	54
1598	28	1730	48	2002	48	6992	54
1602	26	1733	48	2004	46	6993	56
1604	26	1735	48	2006	48	6994	56
1605	26	1736	48	2008	48	6995	56
1606	26	1752	32	2022	46	7001	54
1607	26	1754	32	2024	46	7002	54
1608	26	1756	32	2026	46	7003	54
1612	34	1758	32	2028	46	7004	54

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
7005	54						
7021	24						
7022	24						
7023	24						
7024	24						
7041	24						
7042	24						
7043	24						
7044	24						
7572	18						
7577	18						
7580	20						
7629	54						
7630	54						

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Actuating Force (Release Mechanism)	26
Additional Part Marking	54
Additional Requirements	54
Aperture Cards Required	16
Applicable Documents	56
Ball Retention	28
Base Document	14
Bend (Brittleness)	30
City, State, Zip	14
Character Type	20
Chemical Analysis	32
Company Name/Command	14
Configuration	18
Contract Number/Office Symbol	14
Control	14
Definition of Hermetic Sealing	56
Design and Construction	20
Distortion (Release Mechanism)	34
Dust	36
Endurance	36
Format	14
Government Design Activity	14
Hardness	38
Identification	20
Illustrations	18
Materials	18
Metals	20
Mounting Hardware	54

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Notes	56
Nomenclature	56
Operability	40
Packaging	56
Part Marking	54
Part Numbering	16
Part Number Cross-Reference	56
Penetration (Toughness)	42
Phone Number	14
Quality Assurance	56
Requester FSCM	14
Requester's Name	14
Revision of AEDPS Document Number	16
Roughness	42
Salt Spray	44
Scope	16
Shear Strength	46
Source Table	16
Street Building	14
Superseded Document	56
System Application	14
Tabulated Characteristics	18
Temperature Limits	48
Tensile Strength	50
Units of Measure	16
Weight/Mass	24
Workmanship	54

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

The digital copy of MIL-STD-35-32B(MI), dated 27-September 1985 does not include the foldout pages for the Specification Requirement Sheet (SRS). If you need a copy please call the ASSIST SERVICE DESK at 215-737-8000.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS. In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Missile Command
ATTN: AMSMI-SE-TD-ST
Redstone Arsenal, AL 35898-5276

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.