MIL-STD-35-35(Ml)
19 NOVEMBER 1973

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

NETWORKS

FSC-EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL COMMAND
WASHINGTON, D.C. 20315

Automated Engineering
Document Preparation System
MIL-STD-35-35(MI)

1. This Military Standard is approved by the U.S. Army Materiel Command, Department of the Army and is mandatory for use by all its activities. All other military activities are required to employ this Standard where suitable.

2. Recommended corrections, additions, or deletions should be addressed to Commanding General, U.S. Army Missile Command, Attn: AMSMI-RCS, Redstone Arsenal, Alabama 35809.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of MIL-STD-35-35(MI) is to facilitate the preparation of Military Specifications Exceptions for Networks.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the basic MIL-STD-35, along with MIL-STD-35-1 for Materials, and MIL-STD-35-2 for Finishes.

3. It is important that the Procedure described in the basic document (MIL-STD-35) be followed explicitly in order for the computer to produce a document suitable for competitive procurement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS

SECTION	TITLE	PAGE
1.0	Pulse Forming Networks	1
1.1	Specification Title Index	3-4
1.2	Specification Requirements Instructions	5
1.2.1	General	5
1.2.2	Effectivity of Data	6
1.2.3	Writing Methodology	6
1.2.4	Characteristic Codes and Characteristic Value Codes	7
1.2.5	Pulse Forming Network Characteristics	8
1.2.6	Dimensions and Drawings	8
1.2.7	Materials and Finishes	9
1.2.8	Additional Requirements, Marking, Packaging, Quality Assurance, and Notes	10
1.2.9	Applicable Documents	11
1.2.10	Quality Assurance and Conformance	11
1.2.11	Detailed Requirements	12
1.2.12	Date	12
1.2.13	FSCM/Code Ident of Requester	13
1.2.14	Prime Contract Number	13
1.2.15	Applicable General Specification	13
1.2.16	Generated Document	13
1.2.17	Item Application	13

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS (CONT.)

SECTION	TITLE	PAGE
1.2.18	Drawing Figure Number	13
1.2.19	Dimensions	14
1.2.20	Circuit Diagram Configuration	14
1.2.21	Type Package	14
1.2.22	Mounting Means	14
1.2.23	Number of Sections	15
1.2.24	Wiring	15
1.2.25	Weight	15
1.2.26	Component Part Reliability	16
1.2.27	Mean Time Between Failure	16
1.2.28	Operating Temperature Range	16
1.2.29	Maximum Operating Temperature	16
1.2.30	Nonoperating (Storage) Temperature Range	16
1.2.31	Life Expectancy	16
1.2.32	Altitude	16
1.2.33	Terminal Types, Materials, and Finishes	16
1.2.33.1	Terminal Type and Specification	17
1.2.33.2	Terminal Materials and Specifications	17
1.2.33.3	Terminal Finishes, Finish Thickness, and Specifications	18

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS (CONT.)

SECTION	TITLE	PAGE
1.2.34	Connector Types, Materials, and Finishes	18
1.2.34.1	Connector Type and Specification	18
1.2.34.2	Connector Materials and Specifications	18
1.2.34.3	Connector Finishes, Finish Thickness, and Specifications	18
1.2.35	Body Materials and Finishes	19
1.2.35.1	Body Materials and Specifications	19
1.2.35.2	Body Finishes, Finish Thickness, and Specifications (Case and Mounting Only)	19
1.2.36	Pulse Repetition Frequency	20
1.2.37	Pulse Duration	20
1.2.38	Peak Working Voltage	20
1.2.39	Supply Voltage	20
1.2.40	Operating Voltage	20
1.2.41	Charging Voltage	20
1.2.42	Load, Source, and/or Charging Reactor Impedance	21
1.2.43	Impedance	21
1.2.43.1	Test Methods	21
1.2.43.2	Requirements	21
1.2.44	Waveshape	22
1.2.44.1	Test Methods	22
1 .2.44.2	Requirements	22

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS (CONT.)

SECTION	TITLE	PAGE
1.2.45	Corona Discharge	25
1 .2.45.1	Test Methods	25
1 .2.45.2	Requirements	25
1.2.46	Dissipation Factor	26
1 .2.46.1	Test Methods	26
1 .2.46.2	Requirements	26
1.2.47	Flashpoint of Impregnant or Potting Compound	27
1.2.47.]	Test Methods	27
1.2.47.2	Requirements	27
1.2.48	Reliability Screening (Life, Conditioning)	28
1.2.48.1	Test Methods	28
1 .2.48.2	Requirements	28
1.2.49	High Temperature	29
1.2.49.1	Test Methods	29
1 .2.49.2	Requirements	30
1.2.50	Low Temperature	30
1.2.50.1	Test Methods	30
1 .2.50.2	Requirements	31
1.2.51	Altitude	32
1 .2.51.1	Test Methods	32
1.2.51.2	Requirements	32

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS (CONT.)

SECTION	TITLE	PAGE
1.2.52	Strength of Mounting Means	33
1 .2.52.1	Test Methods	33
1 .2.52.2	Requirements	34
1.2.53	Dielectric Withstanding Volts	34
1.2.53.1	Sea Level	34
1 .2.53.2	Reduced Barometric Pressure	34
1.2.54	Insulation Resistance	35
1.2.54.1	Test Methods	35
1 .2.54.2	Requirements	36
1.2.55	Seal	36
1.2.55.1	Test Methods	36
1.2.55.2	Requirements	38
1.2.56	Fungus	38
1.2.56.1	Test Methods	38
1 .2.56.2	Requirements	39
1.2.57	Resistance to Solvents	39
1 .2.57.1	Test Methods	39
1 .2.57.2	Requirements	40
1.2.58	Radiographic	40

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS (CONT.)

SECTION	TITLE	PAGE
1.2.59	Environmental Test Methods and Requirements	41
1 .2.59.1	Test Methods	42
1.2.59.2	Requirements	42
1.2.59.3	Electrical and Mechanical Limits	42
1.2.60	Humidity	43
1 .2.60.1	Test Methods	43
1.2.60.2	Requirements	43
1.2.61	Workmanship	44
1.2.62	Sources	44
1.2.63	Supersession Data	45
1.2.64	Test Data and Test Methods	45
1.2.65	Specification Requirements, Appendices and SRS	45
1.2.66	Specification Requirements Sheet (SRS) Form	45
1.2.67	Searching for Existing Documents	46
1.2.67.1	General Requirements	46
1.2.67.2	Instructions	47
Specification Requirements		49-112
Quality Assurance Requirements		113-119
Special Requirements		121-122

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS (CONT.)

SECTION	TITLE	PAGE
Table 1.	Mounting Hardware Table	123
Table II.	Mounting Hardware Material Table	124
Table III.	Mounting Hardware Finish Table	124
Table IV.	Wiring Table	125
Table V.	Terminal Table	126
Table VI.	Terminal Hardware Table	127
Table VII.	Terminal Hardware Material Table	128
Table VIII.	Terminal Hardware Finish Table	128
Table IX.	Body, Material, and Finish Table	129
Table X.	Waveshape Characteristics Table	130
Table XI.	Dielectric Withstanding Voltage Table	131
Table XII.	Insulation Resistance Table	132
Appendices		133-145
1.3	Configuration and Drawings	147
1.3.1	Figure Titles vs Figure Numbers	149
1.3.2	Legend Index	151-152
Figures Ø65-Ø1-l thru Ø65-Ø2-2		153-156
Reproducible Foldout Specification Requirements Sheet (SRS) Forms		157,159

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 1.0

PULSE FORMING NETWORKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 1.1

SPECIFICATION TITLE INDEX

Specification Title Code*	Specification Title	Applicable Specification
065001	Network, Pulse Forming	MIL-N-23182 MIL-N-50654

*NOTE - The six (6) digits of this title code are placed in the first six (6) digits of the simplified SRS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 1.2

SPECIFICATION REQUIREMENTS INSTRUCTIONS

1.2.1 General

The purpose of this instruction is to establish the procedures to be followed, and the format to be used, for submission of requirements to obtain a computer generated procurement document.

Requirement definition is through the use of a Specification Requirement Sheet (SRS). Requirements are shown in the Specification Requirements List (pages 49 through 112). The characteristic codes and values for these requirements are entered on the SRS (pages 157 and 159). Besides assisting the user in preparing his requirements for coverage by the Automated Engineering Document Preparation System (AEDPS), the SRS is used in formulating instructions to the computer.

Certain characteristic codes are mandatory to the preparation of a document by the computer. The designation for mandatory characteristic codes will be an asterisk (*) before the characteristic name. If the asterisk is at the far left edge, it is fully mandatory to get a satisfactory document. For example, Codes 1003 through 1009 must be completed. If the asterisk is by an indentured item, it is mandatory only for the item above that is not indentured to the same extent. For example, if Code 2788 is desired, Codes 2790 and 2792 must also be completed. Most characteristic codes will generate paragraphs. Other characteristic codes will be required for comparison purposes only or for inclusion in separate characteristic tables.

The document generated by the AEDPS automatically refers to the referenced specification for established requirements and mandatory tests. If added tests or changes to existing tests are required, the requirements for these tests must be specified. This can be accomplished by selecting the proper codes from the Specification Requirements List and completing the required Appendix.

Reproducible copies of the SRS are located immediately following the Figures in each Section. They are to be locally reproduced and used for submittal of request for documentation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Characteristics that are not absolutely essential for proper identification and establishment of requirements should be omitted. Many non-standard items become cost prohibitive through OVER-SPECIFYING. When the requirements and tests in the specification referenced with Code 1006 meets the user's requirements, parameters (codes) which are void of an asterisk (*), at the far left edge of the Specification Requirements List, should not be used.

1.2.2 Effectivity of Data

Preparation of an acceptable computer generated document is dependent upon clear, accurate, complete, and concise delineation of the requirements on the SRS. The information provided on the SRS is furnished directly into the computer and any inaccuracies or inadequacies in the data submitted will directly affect the computer generated document.

1.2.3 Writing Methodology

The following rules govern the write-in of values on the SRS and applicable appendices:

a. Only block lettering shall be used.

b. The letter "O" shall be a round circle.

c. The figure zero shall be a round circle with a diagonal line through it "Ø".

d. The letter "I" shall have pronounced serifs top and bottom.

e. The figure "one" shall be a straight vertical line "1".

f. The letter "Z" shall have a horizontal line through it "Z".

g. The "±" sign or the words "plus or minus" shall not be used. "+or-" should be the form used, if needed.

h. The signs "$", "¢", or "!" shall never be used.

i. The minus sign (-) must be used with the numerical value whenever a negative quantity is required; i.e., -100 degrees C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

i Except for materials (MIL-STD-35-1) and finishes (MIL-STD-35-2), abbreviations conforming to MIL-STD-12 may be used where write-in capability is allowed in the appendices.

k. The sign "#" must never be used, except to indicate the end of a value, where it must always be used.

1. All fractions must be specified in decimal form. All values less than one (1.Ø) must be preceded by the numeral Ø; i.e., Ø.375.

m. When a write-in value is used to express percentage the value must be followed by the word "percent", and not the sign "%". If (percent) is shown in the Specification Requirements, the word should be not be repeated on the SRS.

1.2.4 Characteristic Codes and Characteristic Value Codes

Each characteristic name which defines a requirement has been assigned a code number for use in the computer. These codes are referred to as characteristic codes, and are of a numeric value, therefore all characteristic codes must have the zeroes slashed with a diagonal line (Ø) when entered on the SRS. Additional characteristic codes which are required to further define an item are contained in the appendices to the Specification Requirements. These are:

Dimension Legends	Appendix A (see 1.2.6)
Applicable Documents Table	Appendix B (see 1.2.9)
First Article Inspection Table	Appendix C (see 1.2.10)
Group A Quality Conformance Table	Appendix D (see 1.2.10)
Group B Quality Conformance Table	Appendix El (see 1.2.10)
Group B Quality Conformance Table	Appendix E2 (see 1.2.10)
Group C Quality Conformance Table	Appendix F (see 1.2.10)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Quality Conformance Sequence Table	Appendix G (see 1.2.10)
Deleted Test Table (Groups A, B, and C)	Appendix H (see 1.2.10)
Deleted First Article Tests	Appendix J (see 1.2.10)

Note: Each line in all tables must be completed before going on to the next line. For example, if Code 6125 is used in Appendix C, Codes 6126, 6127, and 6128 must also be used, even if three dashes "---" are used in one or more of the entries. Care must be exercised in the use of Tables and Appendices.

Specification title, materials, and finishes have been assigned code numbers for computer use. These are referred to as characteristic value codes. The characteristic value codes required for completing the SRS are located as follows:

Specification Titles	Section 1.1
Materials	MIL-STD-35-1
Finishes	MIL-STD-35-2

1.2.5 Pulse Forming Network Characteristics

The pulse forming network characteristics are tabulated in the Specification Requirements.

1.2.6 Dimensions and Drawings

Dimensional data must be supplied for all legends applicable to the pulse forming network selected in Section 1.3. All values must be in inches and must be in numerical decimal form. All values less than one (1.Ø) must be preceded by the numeral Ø; i.e., Ø.375. The Dimension Table and related characteristic codes are provided as Appendix A. Both the minimum and maximum values and the legend letters shall be specified. It is not necessary to complete the entire Appendix A, but it is necessary that any line started be completed; for instance, if Code 1035 is used, 1034 and 1036 must also be used. Three dashes (---) may be

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

used, where applicable, in lieu of a value. For “reference”, “non-tolerance”, and “thread dimensions”, the dimension shall be placed in the minimum column and “REF”, “NTOL”, or thread type, such as “UNC” or “NEF”, shall be placed in the maximum column. If length of threads is necessary, it must be entered in the minimum column; for example, 6-32xØ.25Ø.

Caution: When a Figure is shown in the Configuration and Drawing Section that might need a minor change, a copy of the marked up figure may be submitted with the SRS. When there is no figure shown that can be used without a major change, do not proceed. To have an unlisted item covered, a drawing with all dimensions must be furnished USAMICOM, Attn: AMSMI-RCS. A drawing with legend letters will be prepared, assigned a figure number, and returned to the requester.

1.2.7 Materials and Finishes

Whenever the Specification Requirements reference a material or finish, its code may be entered on the SRS with the 6 digit characteristic value code from the left hand column of MIL-STD-35-1 or MIL-STD-35-2, as applicable. The material or finish nomenclature as shown in the center column will be the exact words that will appear in the generated document. When a material or finish specification is desired, it may be entered on the SRS with the applicable code from the Specification Requirements. Documents other than as specified in the right hand column of MIL-STD-35-1 and MIL-STD-35-2 may be used if necessary. Any document referenced must also be entered on the SRS with a code from Appendix B.

Note: When a desired material or finish is not shown, the system has the capability for accepting write-ins; i.e., “Asphalt” can be shown as a material and “Pressed” can be shown as a finish.

To have an unlisted material or finish added to MIL-STD-35, the desired material or finish must be furnished to USAMICOM, Attn: AMSMI-RCS. The assigned characteristic value codes will be returned to the requester.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.8 Additional Requirements, Marking, Packaging, Quality Assurance, and Notes

Computer generated documents have the capability of accepting additional write-ins, over and above the parameters specified in the Specification Requirements by specific Characteristic Codes. These write-ins will appear in the completed document as Section 3 for the Requirements and Marking, Section 4 for the Quality Assurance, Section 5 for the Packaging, and Section 6 for the Notes. Codes to be used are as follows:

Requirements	7001 through 7005
Marking	6991 through 6995
Quality Assurance	7011 through 7015
Packaging	7006 through 7010
Notes	7016 through 7020

These should be completed on the SRS using the codes shown above. The write-in should be in the exact words desired, but limited to 189 characters (including spaces and punctuation marks) for each characteristic code. When an additional requirement is added in Codes 7001 through 7005, an additional test is usually required (Codes 7001 through 7015).

Computer generated documents on pulse forming networks will automatically have a requirement to package them in accordance with the specification shown with Code 1006. If there are additional packaging requirements, these should be added through the use of Codes 7006 through 7010.

If additional notes are required in Section 6, these should be stated using Characteristic Codes 7016 through 7020.

Part marking shall be in accordance with MIL-STD-1285. Additional marking requirements may be specified on the SRS with appropriate codes between 6991 and 6995. MIL-STD-1285 must also be entered with a code from Appendix B on the SRS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.9 Applicable Documents

Any specification or other document entered as a characteristic value for any characteristic code must also be listed with a code from Appendix B, in its proper numerical sequence. MIL-STD-1285 must always be included per Appendix B. Only the number is required. It is not necessary to list titles.

In addition to the above, add MIL-STD-202 when indicated by an SRS code used, add H4-1 when the source table is used, and add the below-listed documents when the indicated codes are used:

Document	Codes
MIL-N-23182	1644 or 1694
MIL-STD-810	2708, 2728, 2760, or 4755
ASTM D92-57	2636

1.2.10 Quality Assurance and Conformance

Quality assurance requirements are mandatory to the preparation of an acceptable final document. Appendices C, D, E, F, G, H, and J are to be used when making changes to the First Article, Group A, B, and C inspections. Unless modified, these inspections will be in strict accordance with the procedures outlined in the applicable general specification. If it is desired to add, delete, or modify the tests or sequence in any manner, the exceptions must be specified on the SRS with codes from the quality assurance requirements and/or the applicable appendices. One requirement from each group must be selected (except C which is optional). Place an “X” in the value column by the selected characteristic code.

If Appendix D is used with Code 7031, the last three columns should be used to specify the sampling plan. If sampling, as specified in MIL-STD-105, is to be used, use Code 7033 with an “X” and specify the inspection level in the Quantity Inspected column, and the applicable AQL’s in the “AQL” columns. The generated document will specify normal inspection, single sampling. If 100 percent sampling is to be used, use Code 7034 with an “X” and specify 100 percent in the Quantity Inspected column and use three dashes (---) in each of the remaining columns. If a limit is to be placed on the percent defective for 100 percent inspection, use Code 7035 and specify the maximum percent defective. If the tests to be performed are to be divided into subgroups, use Code 7036 with an “X”;

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

the subgroup number should be shown in the Title column, and the sampling plan applicable to all tests in the subgroup should be shown in the remaining columns. The tests that make up the subgroup should be listed, in the order they are to be performed, in the Title column, with three dashes (---) in each of the remaining columns. The generated document will specify that all tests listed under a subgroup will be combined and inspected per the sampling plan specified.

Military Specification Exceptions will eliminate requirements for Qualification.

Quantitative failure rate requirements and associated test procedures have not been included in the AEDPS. The items specified with this system are nonstandard parts whose application is usually confined to a specific system or equipment. Established failure rate requirements can usually be implemented only for those products which are in high volume, continuous production. The data required for establishing failure rates are obtained from a history of consecutive production lots. Under these circumstances, it is not economically feasible to specify and test to a specific quantitative failure rate.

1.2.11 Detailed Requirements

A Specification Title Index (Section 1.1) with Characteristic Value Codes has been established for each title and the related applicable general specification. The Characteristic Value Code for the pulse forming network title selected must be entered at the top of each page of the SRS. The six digits of the serial number shall be shown and may be used for user internal control.

Caution: When there is no suitable Specification Title Code, do not proceed. To have a Specification Title Code assigned, a request must be forwarded to USAMICOM, Attn: AMSMI-RCS, giving the desired title along with the related applicable general specification. A code will be assigned and returned to the requester.

1.2.12 Date

The date the user desires to appear on his generated document must be written in military format with Code 1003 on the SRS; i.e., 3 July 1973. Do not abbreviate month or year (a space must appear between date, month, and year).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.13 FSCM/Code Ident of Requester

The requester's Federal Supply Code for Manufacturers (FSCM) shall be entered on the SRS with Code 1004. The FSCM can be obtained from Cataloging Handbook H4-1 when it is unknown.

1.2.14 Prime Contract Number

It is necessary for statistical purposes to have the contract number of the prime contract entered on the SRS with Code 1005. If the contract number is unknown, the requester's Contracts Department can furnish it. For government use, the abbreviated proper name and office symbol shall be used; i.e., "USAMICOM, AMSMI-RCS".

1.2.15 Applicable General Specification

The applicable general specification is the document to which an exception is being taken and can be found in the Specification Title Index in each part of this Standard. The specification must be entered on the SRS with Code 1006 (the slash sheet, MS number, or part number should be entered, if applicable, to identify the item). The number must also be entered on the SRS with the appropriate code from Appendix B (without slash or part number). If MS numbers are used, these must also be shown on the SRS with codes from Appendix B. An example of how multiple numbers are to be shown with Code 1006 on the SRS is as follows: "MIL-N-23182/5,PCNE571J202Q500". Only the portion that is underlined in the example should be used with codes from Appendix B on the SRS.

1.2.16 Generated Document

The generated document provides exceptions to an existing specification. The existing specification details will be binding unless the generated document makes an exception. The combined provisions, requirements and tests of the two documents will then be the document for procurement.

1.2.17 Item Application

Code 1008 must show Item application such as: next assembly drawing number or type of equipment; i.e., AN/GRC-19, MISSILE X, etc.

1.2.18 Drawing Figure Number

Code 1009 must show the figure number selected from Section 1.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.19 Dimensions

Use Appendix A to complete the SRS with the required dimensions (see 1.2.6).

1,2,20 Circuit Diagram Configuration

It is mandatory that the electrical circuit configuration be specified on the SRS by selecting the applicable circuit from Figure Ø65-Ø2-l or Ø65-Ø2-2 and writinq the type under the selected circuit configuration with Code 1570 or 1571 (see 1.2.6).

1.2.21 Type Package

The type of package may be specified on the SRS by selecting one of the following and writing it in with Code 1562:

Hermetically sealed
Encapsulated
Encased

1.2.22 Mounting Means

Mounting means may be specified on the SRS by selecting one of the following and writing it in with Code 1564:

Bracket
Threaded stud
Threaded insert

In addition, mounting hardware may be specified by the use, as applicable, of Tables I, II, and III (located ahead of the appendices). Codes 2090 through 2109 are used to specify the configuration of the hardware. All lines need not be used, but each line started must be completed. For example, if no screw is needed, Codes 2090 through 2093 are not used, but if a washer, Code 2094, is needed, Code 2094 through 2097 must be used with applicable values. Typical type values are: slot head or philips for screws, flat or insulating or split lock for washers, hexagonal for nut, and bar for clamp. Size values are typically 6-32 for threaded parts, number 6 or inner diameter in inches and width in inches for a clamp. The length/thickness and quantity are entered with applicable codes. Tables II and III are used in the same way. If a specification is not to be referenced, or finish thickness is not specified, three dashes (---) are entered on the SRS with the applicable code to complete the line.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.23 Number of Sections

The number of sections in the network may be specified on the SRS by writing in the number with Code 1568.

1.2.24 Wiring

Wiring may be specified on the SRS by using codes from Table IV "Wiring Table" (located before the appendices) to generate a table. The function column provides capability to specify from one to five signal nomenclatures. The input and output columns provide the capability to specify the input and/or output connector and pin number for the signal specified.

To generate this table, write in the signal nomenclatures with Code 3101, 3104, 3107, 3110, 3113 and/or 3116; write in the input connector and pin number, if required, for each signal nomenclature specified with Code 3102, 3105, 3108, 3111, 3114 and/or 3117; and write in the output connector and pin number, if required, for each signal nomenclature specified with Code 3103, 3106, 3109, 3112, 3115, and/or 3118. Every code and value in a horizontal line must be written in on the SRS to obtain a correct printout of the table, with any unnecessary value space filled with three dashes (---). An example of SRS entries for a 28 volts DC function which requires specifying both input and output connectors and for a command function which requires specifying only output connectors is as follows:

Code	Value
31Ø1	28 VOLTS DC
31Ø2	J1-1
31Ø3	J2-1Ø
31Ø4	COMMAND
31Ø5	---
31Ø6	J36-5

1.2.25 Weight

Weight of the network may be specified on the SRS by writing in one of the following maximum values: (pounds) with Code 1572, (ounces) with Code 1574, or (grams) with Code 1576.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.26 Component Part Reliability

Established reliability parts shall be used when applicable. When this requirement is applicable, enter an "X" with Code 1577.

1.2.27 Mean Time Between Failure

The mean time between failure design parameter may be specified on the SRS by writing in the value (hours) with Code 1579.

1.2.28 Operating Temperature Range

Operating temperature range may be specified on the SRS by writing in the values (deg C) for the minimum and the maximum temperature with Code 1578 and 1580; it is mandatory that both extremes be specified. (See 1.2.3)

1.2.29 Maximum Operating Temperature

Maximum operating temperature may be specified on the SRS by writing the value (deg C) with Code 1582. (See 1.2.3)

1.2.30 Nonoperating (Storage) Temperature Range

The nonoperating (storage) temperature range may be specified on the SRS by writing in the values (deq C) for the minimum and the maximum temperatures with-Codes 1582 and 1583; it is mandatory that both extremes be specified. (See 1.2.3)

1.2.31 Life Expectancy

Life expectancy may be specified on the SRS by writing in the value (hours) minimum with Code 1584.

1.2.32 Altitude

Maximum operating or nonoperating altitude may be specified on the SRS by writing in the value (feet) with Code 1586 for operating or with Code 1588 for nonoperating.

1.2.33 Terminals Types, Materials, and Finishes

Terminal types, materials, and finishes may be specified on the SRS by using codes from Table V, "Terminal Table." If all terminals are of the same type, use the codes in Column 4. Use the codes in Column 1 for input terminals; use the codes in Column 2 for output terminals; and use the codes in Column 3 for ground terminals.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

In addition, terminal hardware is specified by the use of applicable codes from Tables VI, VII, and VIII, located ahead of the appendices. Codes 2145 through 2160 are used to specify the configuration of the terminal. All items, or lines, need not be used, but each line, if used, must be completed. See 1.2.22 for further assistance and discussion on using these type tables.

1.2.33.1 Terminal Type and Specification

a. Type. Select one of the following and write in with appropriate codes from Table V (Codes 2201, 2202, 2203, and/or 2204):

Lug
Threaded stud
Threaded insert
Screw
Wire hook
Pin

If a type other than one of those listed is required, write in the type nomenclature with appropriate codes from Table V.

b. Specification. When a specification is required for the terminal type selected, write in the specification number with appropriate code from Table V (Codes 2211, 2212, 2213, and/or 2214). (See 1.2.9)

1.2.33.2 Terminal Materials and Specifications

a. Materials. Enter the assigned Characteristic Value Code found in MIL-STD-35-1 with appropriate codes from Table V (Codes 2221, 2222, 2223, and/or 2224). If the required material is not listed in MIL-STD-35-1, write in the material nomenclature with appropriate code from Table V. (See 1.2.7)

b. Specifications. When a specification is required for the material selected, enter the specification number found in MIL-STD-35-1 with approriate code from Table V (Codes 2231, 2232, 2233, and/or 2234). If no specification is listed in MIL-STD-35-1, or a specification other than the one listed is required, write in the specification number with appropriate code from Table V. (See 1.2.7)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.33.3 Terminal Finishes, Finish Thickness, and Specifications

a. Finishes. Follow the instructions for terminal materials (1.2.30.2a), substitute finishes found in MIL-STD-35-2, and use appropriate codes from Table V (Codes 2241, 2242, 2243, and/or 2244). (See 1.2.7)

b. Finish Thickness. When it is desired to specify finish thickness, write in the value (inches) minimum with appropriate codes from Table V (Codes 2251, 2252, 2253, and/or 2254).

c. Specifications. Follow the instructions for terminal material specifications (1.2.30.2.b), substitute finish specifications found in MIL-STD-35-2, and use appropriate codes from Table V (Codes 2261, 2262, 2263, and/or 2264). (See 1.2.7)

1.2.34 Connector Types, Materials, and Finishes

Connector types, materials, and finishes may be specified on the SRS by using one or more of the following.

1.2.34.1 Connector Type and Specification

Write in the wordinq required with Code 1592. When a specification is required, write in the specification number with Code 1594 (see .2.9).

1.2.34.2 Connector Materials and Specifications

Enter the Characteristic Value Code assigned to the material selected from MIL-STD-35-1 with Code 1596. If the required material is not listed in MIL-STD-35-1, write in the material nomenclature with Code 1596.

When a specification is required for the material selected, enter the specification number found in MIL-STD-35-1 with Code 1598. If no specification is listed in MIL-STD-35-1, or a specification other than the one listed is required, write in the specification number with Code 1598. (See 1.2.7)

1.2.34.3 Connector Finishes, Finish Thickness, and Specifications

Enter the Characteristic Value Code assigned to the finish selected from MIL-STD-35-2 with Code 1600. If the required finish is not listed in MIL-STD-35-2, write in the finish nomenclature with Code 1600. (See 1.2.7)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

When it is desired to specify finish thickness, write in the value (inches) minimum with Code 1602.

When a specification is required for the finish selected, enter the specification number found in MIL-STD-35-2 with Code 1604. If no specification is listed in MIL-STD-35-2, or a specification other than the one listed is required, write in the specification number with Code 1604. (See 1.2.7)

1.2.35 Body Materials and Finishes

Body materials and finishes for case, seal, and/or mounting means may be specified on the SRS by using appropriate codes from Table IX, "Body Material and Finish Table".

1.2.35.1 Body Materials and Specifications

a. Materials. Enter the assigned Characteristic Value Code found in MIL-STD-35-1 with appropriate codes from Table IX (Codes 2301 for case, 2302 for seal, and/or 2303 for mounting means). If the required material is not listed in MIL-STD-35-1, write in the material nomenclature with appropriate code from Table IX. (See 1.2.7)

b. Specifications. When a specification is required for the material selected, enter the specification number found in MIL-STD-35-1 with appropriate code from Table IX (Code 2311 for case, 2312 for seal, and 2313 for mounting means). If no specification is listed in MIL-STD-35-1, or a specification other than the one listed is required, write in the specification number with appropriate code from Table IX. (See 1.2.7)

1.2.35.2 Body Finishes, Finish Thickness, and Specifications (Case and Mounting Means only)

a. Finishes. Follow the instructions for body materials (1.2.35.1.a) , substitute finishes found in MIL-STD-35-2, and use appropriate codes from Table IX (Codes 2321 for case and/or 2323 for mounting means). (See 1.2.7)

b. Finish Thickness. When it is desired to specify finish thickness, write in the value (inches) minimum with appropriate codes from Table IX (Codes 2331 for case and/or 2333 for mounting means).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

c. Specifications. Follow the instructions for body material specifications (1.2.35.l.b), substitute finish specifications found in MIL-STD-35-2, and use appropriate codes from Table IX (Codes 2341 for case and/or 2343 for mounting means). (See 1.2.7)

1.2.36 Pulse Repetition Frequency

Pulse repetition frequency may be specified on the SRS by using one of the following: Write in the number of pulses per second (average) with Code 1606 (minimum) with Code 1608, and (maximum) with Code 1610; or write in the number of pulses per second (minimum) with Code 1608 and (maximum) with Code 1610; or write in the number of pulses per second (average) with Code 1606.

1.2.37 Pulse Duration

Pulse duration may be specified on the SRS by writing in the value (microseconds) nominal with Code 1612.

1.2.38 Peak Working Voltage

Peak working voltage may be specified on the SRS by writing in the value (volts DC) with Code 1614.

1.2.39 Supply Voltage

Supply voltage may be specified on the SRS by writing in the value (volts DC) nominal with Code 1616.

1.2.40 Operating Voltage

Operating voltage may be specified on the SRS by using one or both of the following: Write in the charging reactor voltage (volts DC) maximum with Code 1618; and/or write in the pulse transformer voltage (volts DC) maximum with Code 1620.

1.2.41 Charging Voltage

Chargin voltage may be specified on the SRS by writing in the value (volts DC) nominal with Code 1622.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.42 Load, Source, and/or Charging Reactor Impedance

Load, source, and/or charging reactor impedance may be specified on the SRS by using one or more of the following: Write in the value (ohms) nominal with Code 1617 for load, with Code 1618 for source, and/or with Code 1619 for charging reactor.

1.2.43 Impedance

1 .2.43.1 Test Methods

The test method for impedance may be specified on the SRS by using one of the following:

a. For testing in accordance with the specification referenced with Code 1006, enter an “X” with Code 1624.

b. For exceptions to the test method of the specification referenced with Code 1006, complete the sentence with Code 1626. The exceptions stated must be limited to 189 characters, including punctuation and spaces.

c. For detailed testing, it is mandatory to enter an “X” with Code 1628, to specify that input impedance shall be measured with rated load connected across the output terminals of the network, that output impedance shall be measured with rated source impedance connected across the input terminals of the network, and that measurements shall be made at pulse repetition frequency.

If a Test Method Code is used, a Requirement Code must also be used. Do not use a comb nation of Codes 1624 and 1630 (see 1.2.59).

1 .2.43.2 Requirements

Requirements for impedance may be specified on the SRS by using one of the following:

a. For requirements in accordance with the requirements of the specification referenced with Code 1006, enter an “X” with Code 1630.

b. For exceptions to the requirements of the specification referenced with Code 1006, complete the sentence with Code 1632. The exceptions stated must be limited to 189 characters, including punctuation and spaces.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

c. For detailed requirements, it is mandatory to write in the values (ohms) nominal for input impedance with Code 1634 and for output impedance with Code 1636.

1.2.44 Waveshape

1.2.44.1 Test Methods

The test method for waveshape may be specified on the SRS by using one of the following:

a. For testing in accordance with the specification referenced with Code 1006, enter an "X" with Code 1640.

b. For exceptions to the test method of the specification referenced with Code 1006, complete the sentence with Code 1642. The exceptions stated must be limited to 189 characters, including punctuation and spaces.

c. For testing per Military Specification, enter an "X" with Code 1644 to specify testing per MIL-N-23182. (See 1.2.9)

If desired, an of the following may be used. Write in the value (percent) nominal with Code 1646, to specify that pulse duration shall be measured at the specified percent amplitude points. Write in value (pulses per second) nominal with Code 1650, to specify that the pulse repetition frequency shall be the specified pulse per second.

If a Test Method Code is used, a Requirement Code must also be used. Do not use a combination of Codes 1640 and 1652 (see 1.2.59).

1 .2.44.2 Requirements

Requirements for waveshape may be specified on the SRS by using one of the following:

a. For requirements in accordance with the requirements of the specification referenced with Code 1006, enter an "X" with Code 1652.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

b. For exceptions to the requirements of the specification referenced with Code 1006, complete the sentence with Code 1654. The exceptions stated must be limited to 189 characters, including punctuation and spaces.

co For detailed requirements, it is mandatory to specify one (or more) waveshape characteristic for one (or more) waveshape by using appropriate codes from Table X, "Waveshape Characteristics" (located before the appendices). Use the codes in Column 1 for output pulse, Column 2 for pulse transformer, Column 3 for pulse forming network, Column 4 for long pulse network, and/or Column 5 for short pulse network.

Pulse duration may be specified by using one of the following. Write in the nominal value (microseconds) with an appropriate code from Column 1, 2, 3, 4, or 5 (Code 2501, 2502, 2503, 2504, or 2505); or write in the minimum value (microseconds) with an appropriate code from Column 1, 2, 3, 4, or 5 (Code 2511, 2512, 2513, 2514, or 2515) and write in the maximum value (microseconds) with an appropriate code from Column 1, 2, 3, 4, or 5 (Code 2521, 2522, 2523, 2524, or 2525) .

percent ripple may be specified by writing in the maximum value percent) with appropriate code from Column 1, 2, 3, 4, or 5 (Code 2531, 2532, 2533, 2534, or 2535).

Pulse rise time may be specified by using one of the following. Write in the maximum value (microseconds) with an appropriate code from Column 1, 2, 3, 4, or 5 (Code 2561, 2562, 2563, 2564, or 2565); or write in the minimum value (microseconds) with an appropriate code from Column 1, 2, 3, 4, or 5 (Code 2551, 2552, 2553, 2554, or 2555) and write in the maximum value (microseconds) with an appropriate code from Column 1, 2, 3, 4, or 5 (Code 2561, 2562, 2563, 2564, or 2565).

Pulse decay time may be specified by following the instructions for pulse rise time (above), substituting Codes 2581 through 2585 for minimum and Codes 2591 through 2595 for maximum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Characteristic impedance may be specified by using one of the following. Write in the nominal value (ohms) with an appropriate code from Column 1, 2, 3, 4, or 5 (Code 2601, 2602, 2603, 2604, or 2605); or write in the minimum value (ohms) with an appropriate code from Column 1, 2, 3, 4, or 5 (Code 2611, 2612, 2613, 2614, or 2615) and write in the maximum value (ohms) with an appropriate code from Column 1, 2, 3, 4, or 5 (Code 2621, 2622, 2623, 2624, or 2625).

Pulse amplitude may be specified by writing in the minimum value volts with an appropriate code from Column 1, 2, 3, 4, or 5 (Code 2631, 2632, 2633, 2634, or 2635) and writing in the maximum value (volts) with an appropriate code from Column 1, 2, 3, 4, or 5 (Code 2641, 2642, 2643, 2644, or 2645) .

Duty cycle may be specified using one of the following. Write in the nominal value (percent) with an appropriate code from Column 1, 2, 3, 4, or 5 (Code 2651, 2652, 2653, 2654, or 2655); or write in the minimum value (percent) with an appropriate code from Column 1, 2, 3, 4, or 5 (Code 2661, 2662, 2663, 2664 or 2665) and write in the maximum value (percent) with an appropriate code from Column 1, 2, 3, 4, or 5 (Code 2671, 2672, 2673, 2674, or 2675).

Pulse droop may be specified by writing in the maximum value (percent with an appropriate code from Column 1, 2, 3, 4, or 5 (Code 2681, 2682, 2683, 2684, or 2685).

For example, if it is desired to specify the nominal pulse duration, the maximum percent ripple, and the maximum pulse droop for the output pulse and to specify the range of pulse rise time and the maximum pulse droop for the short pulse network, entries on the SRS are as follows:

Code	Value
25Ø1	25
2531	7
2681	5
2555	1Ø
2565	15
2685	3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.45 Corona Discharge

1 .2.45.1 Test Methods

The test method for corona discharge may be specified on the SRS by using one of the following:

a. For testing in accordance with the specification referenced with Code 1006, enter an "X" with Code 1690.

b. For exceptions to the test method of the specification referenced with Code 1006, complete the sentence with Code 1692. The exceptions stated must be limited to 189 characters, including punctuation and spaces.

co For testing per Military Specification, enter an "X" with Code 1694 to specify testing per MIL-N-23182. (See 1.2.9)

Write in the values (deg C) of the minimum and maximum temperatures during testing with Codes 1696 and 1698, respectively.

Write in the value (deg max) for angle of inclination with Code 3300.

Write in the value (feet max) for altitude with Code 3302.

If a Test Method Code is used, a Requirement Code must also be used. Do not use a combination of Codes 1690 and 3304 (see 1.2.59).

1 .2.45.2 Requirements

Requirements for corona discharge may be specified on the SRS by using one of the following:

a. For requirements in accordance with the requirements of the specification referenced with Code 1006, enter an "X" with Code 3304.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

b. For exceptions to the requirements of the specification referenced with Code 1006, complete the sentence with Code 3306. The exceptions stated must be limited to 189 characters, including punctuation and spaces.

c. For detailed requirements, one of the following may be used. Enter an "X" with Code 3308, to specify that there shall be no evidence of corona. Write in the amount of excess corona permissible (microamps) with Code 3309.

1.2.46 Dissipation Factor

1 .2.46.1 Test Methods

The test method for dissipation factor may be specified on the SRS by using one of the following:

a. For testing in accordance with the specification referenced with Code 1006, enter an "X" with Code 3310.

b. For exceptions to the test method of the specification referenced with Code 1006, complete the sentence with Code 3312. The exceptions stated must be limited to 189 characters, including punctuation and spaces.

co For detailed testing, it is mandatory to write in the values for test (reference) frequency (hertz) nominal with Code 3316, for RMS measurement voltage (volts) nominal with Code 3318, and for DC measurement voltage (volts) nominal with Code 3320, to specify that the dissipation factor shall be measured at the selected frequency and voltages.

Temperature range may also be specified. Write in the values (deg C) for maximum temperature with Code 3322 and for minimum temperature with Code 3324.

If a Test Method Code is used, a Requirement Code must also be used. Do not use a combination of Codes 3310 and 3326 (see 1.2.59).

1 .2.46.2 Requirements

Requirements for dissipation factor may be specified on the SRS by using one of the following:

a. For requirements in accordance with the requirements of the specification referenced with Code 1006, enter an "X" with Code 3326.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

b. For exceptions to the requirements of the specification referenced with Code 1006, complete the sentence with Code 3328. The exceptions stated must be limited to 189 characters, including punctuation and spaces.

c. For detailed requirements, it is mandatory to write in the value (percent max) of the dissipation factor with Code 3330.

1.2.47 Flashpoint of Impregnant or Potting Compound

1.2.47.1 Test Methods

The test method for flashpoint of impregnant or potting compound may be specified on the SRS by using one of the following:

a. For testing in accordance with the specification referenced with Code 1006, enter an "X" with Code 3332.

b. For exceptions to the test method of the specification referenced with Code 1006, complete the sentence with Code 3334. The exceptions stated must be limited to 189 characters, including punctuation and spaces.

c. For testing in accordance with Publication ASTM D92-57, enter an "X" with Code 3336. (See 1.2.9)

If a Test Method Code is used, a Requirement Code must also be used. Do not use a combination of Codes 3332 and 3338 (see 1.2.59).

1.2.47.2 Requirements

Requirements for flashpoint of impregnant or potting compound may be specified on the SRS by using one of the following:

a. For requirements in accordance with the requirements of the specification referenced with Code 1006, enter an "X" with Code 3338.

b. For exceptions to the requirements of the specification referenced with Code 1006, complete the sentence with Code 3340. The exceptions stated must be limited to 189 characters, including punctuation and spaces.

c. For detailed requirements, it is mandatory to write in the value (deg C) with Code 3342, to specify that the flashpoint shall be not less than that temperature and that test information shall be made available upon request.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.48 Reliability Screening (Life, Conditioning)

1.2.48.1 Test Methods

The test method for reliability screening may be specified on the SRS by using one of the following:

a. For testing in accordance with the specification referenced with Code 1006, enter an "X" with Code 3344.

b. For exceptions to the test method of the specification referenced with Code 1006, complete the sentence with Code 3346. The exceptions stated must be limited to 189 characters, including punctuation and spaces.

c. For detailed testing, it is mandatory to use all of the following: Enter an "X" with Code 3348 to specify that the network shall be terminated with a noninductive resistive load and operated for 24 hours at the specified operating voltage. Write in the value (volts) nominal with Code 3352 to specify peak operating voltage. Write in the value (ohms) nominal with Code 3354 to specify termination resistance.

One or more of the following may also be used. Write in the value (pulses per second) nominal with Code 3356 to specify pulse repetition frequency. Write in the value (deg C) nominal with Code 3358, to specify the test temperature. Complete the sentence (write-in limited to 189 characters, including punctuation and spaces) with Code 3360 to specify examinations to be performed after the reliability screening test.

If a Test Method Code is used, a Requirement Code must also be used. Do not use a combination of Codes 3344 and 3362 (see 1.2.59).

1 .2.48.2 Requirements

Requirements for reliability screening may be specified on the SRS by using one of the following:

a. For requirements in accordance with the requirements of the specification referenced with Code 1006, enter an "X" with Code 3362.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

b. For exceptions to the requirements of the specification referenced with Code 1006, complete the sentence with Code 3364. The exceptions stated must be limited to 189 characters, including punctuation and spaces.

c. For detailed requirements, it is mandatory to write in the value (percent) maximum with Code 3370, to specify that the capacitance change resulting from the reliability screening test shall not exceed the selected percent.

The following may also be used. To specify that there shall be no evidence of corona, enter an "X" with Code 3368.

If Test Method Code 3360 is used, it is mandatory to complete the sentence (write-in limited to 189 characters, including punctuation and spaces) with Code 3371, to specify requirements after test.

1.2.49 High Temperature

1.2.49.1 Test Methods

The test method for high temperature may be specified on the SRS by using one of the following:

a. For testing in accordance with the specification referenced with Code 1006, enter an "X" with Code 2704.

b. For exceptions to the test method of the specification referenced with Code 1006, complete the sentence with Code 2706. The exceptions stated must be limited to 189 characters, including punctuation and spaces.

c. For testing in accordance with Method 512 of MIL-STD-810, it is mandatory to write in the procedure number with Code 2708.

One or more of the following may also be used. Complete the sentence (write-in limited to 189 characters, including punctuation and spaces) with Code 2709, to specify pretest measurements to be performed. To specify the internal storage temperature, write in the value (deg C) with Code 2710, with + or -) tolerance with Codes 2711 and 2712, respectively. Write in the value (deg C) maximum with Code 2713 to specify the highest operating temperature. Write in the value (hours) nominal with Code 2714 to specify the time required for operation and measurements. Complete the sentence (write-in limited to 189 characters, including punctuation and spaces) to specify measurements to be performed after test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

If a Test Method Code is used, a Requirement Code must also be used. Do not use a combination of Codes 2704 and 2716 (see 1.2.59).

1 .2.49.2 Requirements

Requirements for high temperature may be specified on the SRS by using one of the following:

a. For requirements in accordance with the requirements of the specification referenced with Code 1006, enter an "X" with Code 2716.

b. For exceptions to the requirements of the specification referenced with Code 1006, complete the sentence with Code 2718. The exceptions stated must be limited to 189 characters, including punctuation and spaces.

c. For detailed requirements, it is mandatory to write in the waveshape characteristic name with Code 2722, and to specify the deviation value (percent) with Code 2721.

One or more of the following may be used. If the requirement for electrical continuity is desired after testing, enter an "X" with Code 2720.

When Code 2714 is used, it is mandatory to use Code 2723. Complete the sentence with Code 2723 to specify requirements for measurements after test (write-in limited to 189 characters, including punctuation and spaces).

1.2.50 Low Temperature

1.2.50.1 Test Methods

The test method for low temperature may be specified on the SRS by using one of the following:

a. For testing in accordance with the specification referenced with Code 1006, enter an "X" with Code 2724.

b. For exceptions to the test method of the specification referenced with Code 1006, complete the sentence with Code 2726. The exceptions stated must be limited to 189 characters, including punctuation and spaces.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

c. For testing in accordance with Method 502 of MIL-STD-81O, it is mandatory to write in the value (deg C) minimum for the lowest operating temperature with Code 2728, and to write in the values (deg C) for storage temperature with (+ or -) tolerance with Codes 2730, 2732 and 2734, respectively. (See 1.2.9)

One or more of the following may be used. Complete the sentence (write-in limited to 189 characters, including punctuation and spaces) with Code 2736, to specify pretest measurements to be performed. Complete the sentence (write-in limited to 189 characters, including punctuation and spaces) with Code 2737, to specify the chamber air velocity. Write in the value (hours) nominal with Code 2738, to specify the time required for operation and measurements. Complete the sentence (write-in limited to 189 characters, including punctuation and spaces) with Code 2740, to specify measurements to be performed after test.

If a Test Method Code is used, a Requirement Code must also be used. Do not use a combination of Codes 2724 and 2742 (see 1.2.59).

1 .2.50.2 Requirements

Requirements for low temperature may be specified on the SRS by using one of the following:

a. For requirements in accordance with the requirements of the specification referenced with Code 1006, enter an “X” with Code 2742.

b. For exceptions to the requirements of the specification referenced with Code 1006, complete the sentence with Code 2744. The exceptions stated must be limited to 189 characters, including punctuation and spaces.

c. For detailed requirements, it is mandatory to write in the waveshape characteristic name with Code 2748, and to specify the deviation value (percent) with Code 2747.

One or more of the following may be used. To specify that, the network has electrical continuity, enter an “X” with Code 2746. Capacitance change at reduced temperature may be specified; write in the value, either (microfarads) maximum with Code 2752 or (percent) maximum with Code 2754.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

If Code 2740 is used, it is mandatory to use Code 2755. Complete the sentence (write-in limited to 189 characters, including punctuation and spaces) to specify requirements for measurements after test.

1.2.51 Altitude

1.2.51.1 Test Methods

The test method for altitude may be specified on the SRS by using one of the following:

a. For testing in accordance with the specification referenced with Code 1006, enter an "X" with Code 2756.

b. For exceptions to the test method of the specification referenced with Code 1006, complete the sentence with Code 2758. The exceptions stated must be limited to 189 characters, including punctuation and spaces.

c. For testing in accordance with Method 500 of MIL-STD-81O, it is mandatory to write in the procedure number with Code 2760. (See 1.2.9)

If Procedure II of MIL-STD-81O, Method 500, is written in with Code 2760, it is mandatory to write in the value (mm Hg) nominal with Code 2766, to specify Procedure II pressure. In addition, if Procedure II temperature is other than -54°C, it is mandatory to write in the value (deg C) nominal with Code 2764 (i. e., -40, 2, etc.). Complete the sentence (write-in limited to 189 characters, including punctuation and spaces) with Code 2762, to specify pretest data. Write in the value (hours) nominal with Code 2768, to specify the time required for operation and measurements. Write in the value (mm Hg per min) nominal with Code 2770, to specify the rate of pressure change.

If a Test Method Code is used, a Requirement Code must also be used. Do not use a combination of Codes 2756 and 2772 (see 1.2.59).

1 .2.51.2 Requirements

Requirements for altitude may be specified on the SRS by using one of the following:

a. For requirements in accordance with the requirements of the specification referenced with Code 1006, enter an "X" with Code 2772.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

b. For exceptions to the requirements of the specification referenced with Code 1006, complete the sentence with Code 2774. The exceptions stated must be limited to 189 characters, including punctuation and spaces.

c* For detialed requirements, it is mandatory to write in the waveshape characteristic name with Code 2778, and to specify the deviation value (percent) with Code 2777.

If desired, enter an "X" with Code 2776 to specify that the network shall have electrical continuity.

1.2.52 Strength of Mounting Means

1.2.52.1 Test Methods

The test method for strength of mounting means may be specified on the SRS by using one of the following:

a. For testing in accordance with the specification referenced with Code 1006, enter an "X" with Code 2800.

b. For exceptions to the test method of the specification referenced with Code 1006, complete the sentence with Code 2802. The exceptions stated must be limited to 189 characters, including punctuation and spaces.

c. For detailed testing, it is mandatory to write in the value (pounds) nominal with Code 2804 and the value (minutes) nominal with Code 2806, to specify that an axial load of the specified pounds shall be applied to each segment of the mounting means for the specified minutes using the appropriate mating hardware.

The following may also be used. Write in the value (pounds-inches) nominal with Code 2808, to specify that a torque of the specified pounds-inches shall be applied to the mounting means using appropriate mating hardware to apply the torque.

If a Test Method Code is used, a Requirement Code must also be used. Do not use a combination of Codes 2800 and 2810 (see 1.2.59).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.52.2 Requirements

Requirements for strength of mounting means may be specified on the SRS by using one of the following:

a. For requirements in accordance with the requirements of the specification referenced with Code 1006, enter an "X" with Code 2810.

b. For exceptions to the requirements of the specification referenced with Code 1006, complete the sentence with Code 2812. The exceptions stated must be limited to 189 characters, including punctuation and spaces.

c. For detailed requirements, it is mandatory to enter an "X" with Code 2814, to specify that there shall be no breakage, malfunction, or evidence of any damage which would impair normal operation.

1.2.53 Dielectric Withstanding Volts

1.2.53.1 Sea Level

Dielectric withstanding volts can be specified by placing an "X" with Code 4860 or by completing the sentence with Code 4861 or completion of Table XI and specifying the nature of potential with Code 4864. Table XI must be completed for each line used although all lines need not be used. If a value is not necessary the code shall be entered on the SRS with three dashes (---). Codes 4866 through 4872 are optional and can be used to enter the applicable item. Requirements shall be specified when either Code 4860, 4861, or 4864 is used. The requirement shall be specified by placing an "X" with Code 4873 or by completing the sentence with Code 4874 or by entering the maximum DC leakage in milliamps using Code 4875.

1 .2.53.2 Reduced Barometric Pressure

Dielectric withstanding volts can be specified by placing an "X" with Code 4883 or by completing the sentence with Code 4884 or by entering the test condition letter with Code 4886, the nature of potential with Code 4888 and the completion of Table XI. Table XI must be completed for each line used, although all lines need not be used. If a value is not necessary, the code shall be entered on the SRS with three dashes (---). The use of Codes 4890 through 4893 and 4900 through 4904 is optional and can be used to enter the applicable item. Requirements shall be specified by placing an "X" with Code 4907 or by completing the sentence with Code 4908, or by entering the maximum DC leakage in milliamps using Code 4894.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.54 Insulation Resistance

1 .2.54.1 Test Methods

The test method for insulation resistance may be specified on the SRS by using one of the following:

a. For testing in accordance with the specification referenced with Code 1006, enter an "X" with Code 1370.

b. For exceptions to the test method of the specification referenced with Code 1006, complete the sentence with Code 1371. The exceptions stated must be limited to 189 characters, including punctuation and spaces.

c. For testing in accordance with Method 302 of MIL-STD-202, it is mandatory to use both of the following:

(1) Write in the Test Condition Letter with Code 1378, or generate the Insulation Resistance Table (refer to Table XII, located before the appendices). To generate this table, write in the "from" terminal number with Code 3201; write in the "to" terminal number with Code 3202 (if only one terminal number is required, enter three dashes (---) with Code 3202); write in minimum insulation resistance (megohms) with Code 3203; write in the test temperature (deg C) at which insulation resistance is to be measured with Code 3204; and write in the test potential (volts) with Code 3206. For additional measurements, follow the same procedure. Use as many codes from the From Terminal No. column as are required (Codes 3207, 3212, 3217, 3222, and 3227) and complete each horizontal line started.

(2) Enter an "X" with Code 1374 to specify points of measurement shall be in accordance with the Insulation Resistance Table.

Caution: If Code 1378 was selected, it is mandatory to generate the Insulation Resistance Table at this time. Follow the instructions in (1) above.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

In addition to (1) and (2) above, one or more of the following may also be used. Complete the sentence with Code 1375, to specify special preparations or conditions (write-in limited to 189 characters, including punctuation and spaces); write in electrification time (minutes) with Code 1376; and/or write in the measurement error (percent) with Code 1377, to specify that measurement error at the insulation resistance value required shall not exceed the selected percent.

If a Test Method Code is used, a Requirement Code must also be used. Do not use a combination of Codes 1370 and 1379 (see 1.2.59).

1 .2.54.2 Requirements

Requirements for insulation resistance may be specified on the SRS by using one of the following:

a. For requirements in accordance with the requirements of the specification referenced with Code 1006, enter an "X" with Code 1379.

b. For exceptions to the requirements of the specification referenced with Code 1006, complete the sentence with Code 1380. The exceptions stated must be limited to 189 characters, including punctuation and spaces.

c. For detailed requirements, it is mandatory to specify minimum insulation resistance on the Insulation Resistance Table. If Test Method 1.2.54.I.c was not selected, this table must be generated at this time. Follow the instructions in 1.2.54.1.c (1).

1.2.55 Seal

1 .2.55.1 Test Methods

The test method for seal may be specified on the SRS by using one of the following:

a. If the first test method is desired, use Code 4733 with an "X" on the SRS to specify testing per the specification referenced with Code 1006.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

b. If the second test method is desired, use Code 4734 and the sentence completed with the specified exceptions, for testing per the referenced specification with exceptions. The exceptions stated must be limited to 189 characters, including punctuation and spaces.

c. If testing is to be detailed, it is mandatory to use Code 4737 to specify the Test Condition Letter of Method 112, MIL-STD-202*

If Test Condition A or B is selected, Codes 4738 and 4739 may be used only if exception to material or temperature specified in Method 112 is required.

If Test Condition C is selected, it is mandatory to use Code 4740 to specify test procedure number and Code 4741 to specify sensitivity of the leak detection system, whether mass spectrometer detector or radioactive counter. The test equipment is set to determine whether leakage is more, or less, than specified rate. If required, Code 4742 may be used to specify backfilling pressure and Code 4749 may be used to specify the number of pressure cycles.

If procedure III of Test Condition C is selected, it is mandatory to use Code 4750 to specify the gross leak test method to be used after the fine leak test.

If procedure IV of Test Condition C is selected, it is mandatory to use Code 4750 (see paragraph above), Code 4751 to specify chamber pressure, and Code 4752 to specify duration of reduced pressure.

If Test Condition D or E is selected, Code 4743 may be used, if required, to specify test mounting fixtures.

If the specification referenced with Code 1006 specifies Method 112 of MIL-STD-202, and exceptions are to be taken, Code 4734 (see b. above) should be used if the exceptions can be stated within the 189 character limitation; Code 4737 (see c. above) should be used if the exceptions cannot be stated within the ‘limitations.

If Code 4733 is selected, it is mandatory that Code 4745, 4746, or 4747 be used; if Code 4734 or 4737 is selected, it is mandatory that Code 4744, 4745, 4746, or 4747 be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.55.2 Requirements

Requirements for seal may be specified on the SRS by using one of the following:

a. If the first requirement is desired, use Code 4744 with an "X" for requirements per the referenced specification.

b. If the second requirement is desired, use Code 4745 and complete the sentence with the specified exceptions for requirements per the referenced specification with exceptions.

c. If requirements are to be detailed, write in the value; i.e., 10 to the -6 (std ATM cc/see) with Code 4746 for specifying that the leakage rate shall not exceed the selected rate, or use Code 4747 for specifying that there shall be no visible bubbles indicative of leakage or leakage of compound if applicable.

1.2.56 Fungus

1.2.56.1 Test Methods

The test method for fungus may be specified on the SRS by using one of the following codes:

a. If the first test method is desired, use Code 4753 with an "X" to specify testing per the specification referenced with Code 1006.

b. If the second test method is desired, use Code 4754 and complete the sentence with the specified exceptions, for testing per the referenced specification with exceptions. The exceptions stated must be limited to 189 characters, including punctuation and spaces.

c. If testing is to be detailed, use Code 4755 with an "X" to specify that the testing be performed in accordance with Method 508 of MIL-STD-810. Code 4756 may be used to specify the duration of the test in days, if other than 28 days. Code 4758 may be used to specify measurements after test.

If the specification referenced with Code 1006 specifies Method 508 of MIL-STD-810, and exceptions are to be taken, Code 4754 (see b. above) should be used if the exceptions can be stated within the 189 character limitation; Code 4755 (see c. above) should be used if the exceptions cannot be stated within the limitations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

If Code 4753 is selected, it is mandatory that Code 4760 or 4762 be used; if Code 4754 or 4755 is selected, it is mandatory that Code 4759, 4760, or 4762 be used.

1 .2.56.2 Requirements

Requirements can be specified by the use of an "X" with Code 4759 for requirements per the referenced specification, by the use of Code 4760 with the sentence completed with the specified exceptions for requirements per the referenced specification with exceptions, by the use of an "X" with Code 4761 to give the manufacturer the option of certifying that the material is fungus resistant or is suitably treated to prevent fungus growth, or by the use of an "X" with Code 4762 to require that testing be performed to determine absence of fungus growth. In addition, requirements after test may be specified by completing the sentence with Code 4763 (write-in within 189 charater limitation).

If Code 4753 is selected, it is mandatory that Code 4760 or 4762 be used; if Code 4754 or 4755 is selected, it is mandatory that Code 4759, 4760, or 4762 be used.

1.2.57 Resistance to Solvents

1 .2.57.1 Test Methods

The test method for resistance to solvents can be specified by using one of the following codes:

a. If the first test method is desired, use Code 4828 with an "X" on the SRS to specify testing per the specification referenced with Code 1006.

b. If the second test method is desired, use Code 4829 and the sentence completed with the specified exceptions, for testing per the referenced specification with exceptions. The exceptions stated must be limited to 189 characters, including punctuation and spaces.

c. If testing is to be detailed, it is mandatory to complete the sentence with Code 4830, to specify the portion of the specimen to be brushed and to write in the quantity of specimens to be tested with Code 4831, in accordance with Method 215 of MIL-STD-202.

If desired, one or more of the following may be used. Code 4832 may be used to add solutions, Code 4836 may be used to delete solutions. Complete the sentence with Code 4837, to specify measurements and examinations after test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

If the specification referenced with Code 1006 specified Method 215 of MIL-STD-202, and exceptions are to be taken, Code 4829 (see b. above) should be used if the exceptions can be stated within the 189 character limitation; Code 4830 (see c. above) should be used if the exceptions cannot be stated within the limitations.

If Code 4828 is selected, it is mandatory that Code 4834 or 4835 be used; if Code 4829 or 4830 is selected, it is mandatory that Code 4833, 4834, or 4835 be used.

1 .2.57.2 Requirements

Requirements for resistance to solvents may be specified on the SRS by using one of the following:

a. For requirements in accordance with the requirements of the specification referenced with Code 1006, enter an “X” with Code 4833.

b. For exceptions to the requirements of the specification referenced with Code 1006, complete the sentence with Code 4834. The exceptions stated must be limited to 189 characters, including punctuation and spaces.

c. For detailed requirements, it is mandatory to enter an “X” with Code 4840 to specify that there shall be no physical damage or degradation.

One or more of the following may also be used. Enter an “X” with Code 4841 to specify that the marking shall remain legible. Complete the sentence (write-in limited to 189 characters, including punctuation and spaces) with Code 4842 to specify the permissible extent of mechanical or electrical damage. Complete the sentence (write-in limited to 189 characters, including punctuation and spaces) to specify the requirements for measurements after test with Code 4835.

1.2.58 Radiographic

If radiographic inspection is required, an “X” with Code 4843 will give full requirements of Method 209 of MIL-STD-2C12 in the generated document. If Code 4843 is used, either Code 4857 or 4858 must be used with an “X”. If Code 4858 is used, the negatives will be made available for examination as required, but will not be delivered. A code from Appendix B must also be used showing MIL-STD-202 if Code 4843 is used. Group A testing must also specify 100 percent testing through the use of Appendix D or Codes 7011 through 7015.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.59 Environmental Test Methods and Requirements

The instructions contained in this paragraph shall be followed when it is desired to make exceptions to the test methods and requirements of any of the following environmental tests:

Capacitance

Flammability (External Flame)

Random Drop

Acceleration

Explosion

Soldering
- Solderability
- Resistance to Soldering Heat

Thermal Shock

Salt Spray

Immersion

Moisture Resistance

Terminal Strength

Vibration
- Random
- High Frequency
- Low Frequency

Shock
- High Impact
- Specified Pulse

When a code is shown for any test method, it is mandatory that a requirement code be shown. However, the first test method code and the first requirement code should not be used together, since that combination makes no exception to the specification referenced with Code 1006.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1 .2.59.1 Test Methods

The test method may be specified on the SRS by using one of the following codes:

a. If the first test method is desired, use the first test method code with an "X" to specify testing per the specification referenced with Code 1006.

b. If the second test method is desired, use the second test method code and complete the sentence with the specified exceptions, for testing per the referenced specification with exceptions. The exceptions stated must be limited to 189 characters, including punctuation and spaces.

c. If testinq is to be detailed, one or more of the test method codes should be used to specify test conditions. All codes marked with an asterisk "*" must be used.

If the specification referenced with Code 1006 specifies a MIL-STD-202 test method and exceptions are to be taken, the second test method code (see b. above) should be used if the exceptions can be stated within the 189 character limitation; the third test method code (see c. above) should be used if the exceptions cannot be stated within the limitation.

1 .2.59.2 Requirements

If the requirements specified in the specification shown with Code 1006 are to be used, the first requirements code should be shown, with an "X" on the SRS. If exceptions to the requirements specified in the specification shown with Code 1006 are to be made, the second requirements code should be shown with exceptions written in on the SRS to complete the sentence. If the requirements are to be changes in parameter values as a result of the environmental test, one or more of the remaining requirements codes with the applicable fill-in values must be shown. When the third requirements code is shown, the requirements that there be no evidence of physical damage or degradation of performance will be included automatically.

1.2.59.3 Electrical and Mechanical Limits

The requirements for the environmental tests covered in this paragraph and the requirements for other tests may include limiting values for measurements to be made before, during, and at the conclusion of the test. Requirement Codes for these electrical and mechanical limits should not be selected unless a code, or codes, that will assure the inclusion of a Test Method is also used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.60 Humidity

1.2.60.1 Test Methods

The test method for humidity may be specified on the SRS by using one of the following:

a. For testing in accordance with the specification referenced with Code 1006, enter an “X” with Code 4787.

b. For exceptions to the test method of the specification referenced with Code 1006, complete the sentence with Code 4788. The exceptions stated must be limited to 189 characters, including punctuation and spaces.

c* For testing in accordance with MIL-STD-202, Method 103, it is mandatory to write in the test condition letter with Code 4790 and complete the sentence (write-in limited to 189 characters, including punctuation and spaces) with Code 4793, to specify points of application of polarizing voltage.

One or more of the following may also be used. Complete the sentence with Code 4791, to specify measurements after conditioning; with Code 4794, to specify final measurements at high humidity; with Code 4795, to specify final measurements after drying period (each write-in limited to 189 characters, including punctuation and spaces). Write in the minimum time period with Code 4792, to specify the duration of application of polarizing voltage (i.e., 2 hours, 15 minutes, etc). Write in the value (volts DC) nominal with Code 4804 to specify the polarizing voltage.

If a Test Method Code is used, a Requirement Code must also be used. Do not use a combination of Codes 4787 and 4796 (see 1.2.59).

1 .2.60.2 Requirements

Requirements for humidity may be specified on the SRS by using one of the following:

a. For requirements in accordance with the requirements of the specification referenced with Code 1006, enter an “X” with Code 4796.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

b. For exceptions to the requirements of the specification referenced with Code 1006, complete the sentence with Code 4797. The exceptions stated must be limited to 189 characters, including punctuation and spaces.

c. For detailed requirements, it is mandatory to enter an "X" with Code 4798, to specify that there shall be no evidence of physical damage, or degradation of performance.

If Code 4791 is used, it is mandatory to complete the sentence with Code 4806, to specify requirements after conditioning; if Code 4794 is used, it is mandatory to complete the sentence with Code 4800, to specify requirements after test and at high humidity; if Code 4795 is used, it is mandatory to complete the sentence with Code 4801, to specify requirements after test and drying period (each write-in limited to 189 characters, including punctuation and spaces).

When the insulation resistance requirement is applicable, enter an "X" with Code 4799. Review Table X11 to ensure that the value (megohms) minimum requirement has been specified. (See 1.2.54.2)

1.2.61 Workmanship

Although MIL-STD-454, Requirements for Equipment, is often used for workmanship requirements for parts, it is too broad and not definitive enough for use in component parts.

If workmanship requirements are different than those defined in the specification shown with Code 1006, complete the sentence, "Workmanship shall be in accordance with ____", using Code 6870. Limit the write-in to 189 characters, including spaces and punctuation. If any document is referenced, it must also be entered on the SRS with a code from Appendix B.

1.2.62 Sources

Either Code 6873 or 6874 must be used to specify if the desired item is to be procured from one source (source control) or from one or more suggested sources (specification control). Method for use of those two codes is to place an "X" with either code on the SRS. In addition, at least one line of the Source Table must be used (Codes 5001 and 5002). The source must be shown by FSCM (Cataloging Handbook H4-1) and may show the manufacturer's name and address with a dash between them. The part number (when known) must be exactly as shown by the manufacturer, including all dashes, punctuation and spaces.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.63 Supersession Data

When a document is being requested to supersede a purchase description or drawings, the superseded number and its date should be entered in field codes 0371 and 0372. The number shall be self-descriptive, such as: "Purchase Description PD-00423" or "Drawing 1ØØ55ØØ4" and the date should be in military format; i.e., 3 July 1968.

1.2.64 Test Data and Test Methods

Recording Group A, B and/or C test data is not customary. Most component manufacturers have established "go-no go" test equipment for these inspection tests. Recording of data is usually "Special Handling" and results in increased costs. If it is desired that data be recorded, an "X" shall be entered after the applicable code. The specification will then require recording the data and require that it be avaialble upon request.

Some manufacturers have developed individual test methods which yield results equivalent to those results obtainable by the customary military test. Should it be desired to permit alternate test methods in lieu of specified methods, place an "X" on the SRS with Code 1561. The supplier must then request approval to use alternate test methods and must demonstrate that the alternate methods do not relax the specified requirements. If strict adherance to the test methods specified is desired, this can be obtained by the use of an "X" with Code 1560. One must be selected.

1.2.65 Specification Requirements, Appendices and SRS

Preparation of an acceptable document by the computer is dependent upon two major factors. These are (1) correct selection of the appropriate Specification Requirements and their applicable codes, and (2) the proper application of the requirements and codes onto the SRS Form. The above is particularly important in the use of the various appendices.

1.2.66 Specification Requirements Sheet (SRS) Form

A form has been prepared to expedite and ease the preparation and submission of the requirements and parameters necessary for the computer to complete the process of "writing" a procurement document. It is important that the first 12 spaces be completed on each sheet. The next 4 numbered spaces (13, 14, 15 and 16) will contain the required Characteristic Codes; and the following 63 spaces (17 through 79) will be used for

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Characteristic Values. Each value must be ended by the use of the pound sign (#). The requester's complete name, mailing address and phone number must be at the top of each SRS submitted. If micorfilm query is not completed, a hard copy will be furnished. Revision block is only to be used when a revision to an existing AEDPS is desired, and then only by the original requester or by a bonafide registered user.

Two removable fold-out SRS Forms are furnished following the Figures for each Generic Family of items. These forms are to be locally reproduced for use in submitting requests for computer generated Military Specification Exceptions. The first of the forms have the Characteristic Names and Characteristic Codes that are mandatory for each Generic Family. Where mandatory requirements are not specified on the form, any of the other Characteristic Codes in any of the Requirements, Tables, or Appendices can be used. The Characteristic Names are not required, but may be used if desired.

A standard 80 column keypunch form may be used, provided the first 12 spaces on each line contain the Specification Title Code and Serial Number.

Caution: Where write-in capability is utilized, the absolute limit is 189 characters for each code, including spaces and punctuation. When the write-in exceeds 63 characters, it should continue into the next line. It is important to continue through space 79 even if it breaks a word, and continue in space 17 on the second line. If more than one line is used, each line must be numbered in space 80; i.e., 1, 2, etc., with the pound sign (#) at the end of the value on the last line. If only one line is used, numbering is not required.

1.2.67 Searching for Existing Documents

1 .2.67.1 General Requirements

Before a request for a document is submitted, it is generally recommended that a search be initiated, to determine if a document already exists in the system that will adequately fulfill the requirement. This is particularly desirable when a document is desired for an item for which a wide range in one of the parameters could be acceptable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1 .2.67.2 Instructions

When a search only is desired, the SRS must be marked in large letters at the top of each sheet with words “SEARCH ONLY” (see example in MIL-STD-35). The system will then only look for Characteristic Codes furnished and will ignore all others. For example, if Code 1011 specified “1 .9(3”, the system will list all documents with this minimum dimension or if Code 1011 specified “1.ØØ^2.5Ø”, the system will list all documents with a minimum dimension of 1 inch through 2.5 inches, providing all other characteristic values specified also match.

This same philosophy applies to other characteristics; for example, if a value of “Ø.ØØ1^1Ø,ØØØ,ØØØ.Ø” for resistance is supplied and no wattage is supplied, the system would list all documents having a resistance rating of 0.001 OHM through 10,000,000.0 OHMS and could show an unlimited number of watts, if a power rating value, or range, is not specified.

Note: This symbol “^” is used between numeric values whenever a range of values is desired. The asterisk “*” on the basic SRS should be ignored by the requester for “SEARCH ONLY” usage.

Custodians:
Army-MI

Review Activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-MU
Army-SL
Army-WC

Preparing Activity:
Army-MI
(Project EDS-A024-8)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.12	*Date	1003
1.2.13	*FSCM/Code Ident of Requester	1004
1.2.14	*Prime Contract Number	1005
1.2.15	*Applicable General Specification from Specification Title Index	1006
1.2.17	*Item Application	1008
1.2.18	*Drawing Figure Number	1009
1.2.19	*Dimensions	
	(Enter applicable codes, legends and values from Appendix A on the SRS)	
1.2.20	*Circuit Diagram Configuration	
	Select type from Figure 065-02-1	1570
	or	
	Select type from Figure 065-02-2	1571
	Note: If the Requirements and Quality Assurance Provisions in the specification shown with Code 1006 meet the users requirements, Characteristic Codes without an asterisk "*" in the far left edge should not be used. The generated document will then specify all the requirements and tests of the referenced specification.	

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.21	Type Package (Select one if required)	1562
	Hermetically sealed	
	Encapsulated	
	Encased	
1.2.22	Mounting Means (Select one if required)	1564
	Bracket	
	or	
	Threaded stud	
	or	
	Threaded insert	
	Mounting hardware (Enter applicable codes and values on SRS from Tables I, II, and III)	
1.2.23	Number of Sections	1568
1.2.24	Wiring (Enter applicable codes and values on SRS from Table IV)	
1.2.25	Weight (Select one and enter value)	
	Pounds max	1572
	or	

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA ,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.25 Cont.	Ounces max	1574
	or	
	Grams max	1576
1.2.26	Established reliability parts shall be used	1577
1.2.27	Network designed for MTBF of (hours)	1579
1.2.28	Operating Temperature Range	
	*Min (deg C)	1578
	*Max (deg C)	1580
1.2.29	Maximum Operating Temperature	
	*Max (deg C)	1581
1.2.30	Nonoperating (storage) Temperature Range	
	*Min (deg C)	1582
	*Max (deq C)	1583
1.2.31	Life Expectancy (hours) min	1584
1.2.32	Altitude	
	Max Operating (feed)	1586
	or	
	Max Nonoperating (feet)	1588

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL IN

REF. PARA.	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.33	Terminals (Enter applicable codes and values on SRS from Table V)	
	Terminal hardware (Enter applicable codes and values on SRS from Tables VI, VII, and VIII)	
1.2.34.1	Connector Type	1592
	Connector specification	1594
1.2.34.2	Connector Material	1596
	Connector material specification	1598
1.2.34.3	Connector Finish	1600
	Connector finish thickness (inches) min	1602
	Connector finish specification	1604
1.2.35	Body Material and Finish (Enter applicable codes and values on SRS from Table IX)	
	Electrical Characteristics	
1.2.36	Pulse repetition frequency	
	Average (pulses per second)	1606
	Min (pulses per second)	1608
	Max (pulses per second)	1610

* INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.37	Pulse duration (microseconds) nom	1612
1.2.38	Peak working voltage (volts DC)	1614
1.2.39	Supply voltage (volts DC)	1616
1.2.40	Operating voltage	
	Charging raactor (volts DC) max	1618
	Pulse transformer (volts DC) max	1620
1.2.41	Charging voltage (volts DC) nom	1622
1.2.42	Impedance	
	Load (ohms) nom	1617
	Source (ohms) nom	1619
	Charging reactor (ohms) nom	1621
.2.43	Impedance	
.2.43.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	1624
	or	

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.43.1 Cont.	Test per Specification shown with Code 1006 except .	1626
	or	
	Test as follows:	
	*Measure input impedance with rated load connected, and output impedance with rated source connected at rated pulse repetition frequency	1628
1.2.43.2	Requirement (Select one) (Mandatory if either Code 1624, 1626, or 1628 is selected)	
	Requirements per Specification shown with Code 1006	1630
	or	
	Requirements per Specification shown with Code 1006 except .	1632
	or	
	Requirements as follows:	
	*Input impedance (ohms) nom	1634
	*Output impedance (ohms) nom	1636

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.44	Waveshape	
1.2.44.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	1640
	or	
	Test per Specification shown with Code 1006 except _____.	1642
	or	
	Test per MIL-N-23182 (See 1.2.9)	1644
	Pulse duration measured at (percent) nom amplitude points	1646
	Pulse repetition frequency (pulses per second) nom	1650
1.2.44.2	Requirement (Select one) (Mandatory if either Code 1640, 1642, or 1644 is selected)	
	Requirements per Specification shown with Code 1006	1652
	or	

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.44.2 Cont.	Requirements per Specification shown with Code 1006 except .	1654
	or	
	Requirements as follows:	
	*Enter applicable codes and and values on SRS from Table X	
1.2.45	Corona Discharge	
1.2.45.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	1690
	or	
	Test per Specification shown with Code 1006 except .	1692
	or	
	Test per MIL-N-23182 (See 1.2.9)	1694

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.45.1 (Cont.	Temperature	
	*Min (deg c)	1696
	*Max (deg C)	1698
	Angle of inclination (deg max)	3300
	Altitude (feet max)	3302
1.2.45.2	Requirement (Select one) (Mandatory if either Code 1690, 1692, or 1694 is selected)	
	Requirements per Specification shown with Code 1006	3304
	or	
	Requirements per Specification shown with Code 1006 except .	3306
	or	

"INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
.2.45.2 Cont.	Requirements as follows:	
	No indication of corona	3308
	or	
	No indication of corona in excess of (microamps)	3309
.2.46	Dissipation Factor	
[.2.46.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	3310
	or	
	Test per Specification shown with Code 1006 except .	3312
	or	
	Test as follows:	
	*Test (reference) frequency (hertz)	3316
	*Voltage (volts RMS)	3318
	and/or	
	*Voltage (volts DC)	3320

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1 .2.46.1 Cont.	Temperature range	
	*Max (deg C)	3322
	*Min (deg C)	3324
1 .2.46.2	Requirement (Select one) (Mandatory if either Code 3310, 3312, or 3316 is selected)	
	Requirements per Specification shown with Code 1006	3326
	or	
	Requirements per Specification shown with Code 1006 except .	3328
	or	
	Requirements as follows:	
	*Dissipation factor (percent) max	3330
1.2.47	Flashpoint of Impregnant or Potting Compound	
1.2.47.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	3332
	or	

‘INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.47.1 Cont.	Test per Specification shown with Code 1006 except ____.	3334
	or	
	Test per Publication ASTM D92-57 (See 1.2.9)	3336
1.2.47.2	Requirement (Select one) (Mandatory if either Code 3332, 3334, or 3336 is selected)	
	Requirements per Specification shown with Code 1006	3338
	or	
	Requirements per Specification shown with Code 1006 except ____.	3340
	or	
	Requirements as follows:	
	*Min flashpoint (deg C)	3342
1.2.48	Reliability Screening (Life, Conditioning)	
1.2.48.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	3344
	or	

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
7.2.48.1 Cont.	Test per Specification shown with Code 1006 except ___.	3346
	or	
	Test as follows:	
	*An operating voltage shall be applied for 24 hours. The network shall be terminated in a resistive load.	3348
	*Nominal operating voltage (volts peak)	3352
	*Nominal termination resistance (ohms)	3354
	Pulse repetition frequency (pulses per second) nom	3356
	Nominal test temperature (deg C)	3358
	Examinations after test shall be ___.	3360
1.2.48.2	Requirement (Select one) (Mandatory if either Code 3344, 3346, or 3348 is selected)	
	Requirements per Specification shown with Code 1006	3362
	or	

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.48.2 Cont.	Requirements per Specification shown with Code 1006 except ___.	3364
	or	
	Requirements as follows:	
	*Capacitance change (percent) max	3370
	No evidence of corona	3368
	Requirements after test shall be ___.	3371
1.2.49	High Temperature	
1.2.49.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	2704
	or	
	Test per Specification shown with Code 1006 except ___.	2706
	or	

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.49.1 Cont.	Test per Method 501 of MIL-STD-810	
	*Procedure number	2708
	Pretest measurements shall be ____.	2709
	Internal chamber temperature (deg C)	2710
	*+ (deg C)	2711
	*- (deg C)	2712
	Highest operating temperature (deg C)	2713
	Time for operation and measurements (hours) nom	2714
	Measurements after test shall be ____.	2715
1.2.49.2	Requirement (Select one) (Mandatory if either Code 2704, 2706, or 2708 is selected)	
	Requirements per Specification shown with Code 1006	2716
	or	
	Requirements per Specification shown with Code 1006 except ____.	2718
	or	

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.49.2 Cont.	Requirements as follows:	
	*Waveshape ____ characteristics	2722
	*Deviation (percent)	2721
	Electrical continuity	2720
	Requirements after test shall be ___.	2723
1.2.50	Low Temperature	
1.2.50.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	2724
	or	
	Test per Specification shown with Code 1006 except __.	2726
	or	
	Test per Method 502 of MIL-STD-810	
	*Lowest operating temperature (deg C)	2728
	*Storage temperature (deg C)	2730
	*+ (deg C)	2732
	*- (deg C)	2734

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.50.1 Cont.	Pretest measurements shall be be ____.	2736
	Chamber air velocity shall be _____ (CFM)	2737
	Time for operation and measurements (hours)	2738
	Measurements after test shall be ____.	2740
1.2.50.2	Requirement (Select one) (Mandatory if either Code 2724, 2726, or 2728 is selected)	
	Requirements per Specification shown with Code 1006	2742
	or	
	Requirements per Specification shown with Code 1006 except ____.	2744
	or	
	Requirements as follows:	
	*Waveshape _ characteristics	2748
	*Deviation (percent)	2747
	Electrical continuity	2746

"INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.50.2 (Cont.	Capacitance change at reduced temperature (Select one and write in value)	
	Microfarads max	2752
	or	
	Percent max	2754
	Requirements after test shall be ___.	2755
1.2.51	Altitude	
1.2.51.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	2756
	or	
	Test per Specification shown with Code 1006 except ___.	2758
	or	
	Test per Method 500 of MIL-STD-810	
	*Procedure number	2760
	*Pretest data shall be ___.	2762

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.51.1 Cont.	If Procedure II	
	*Temperature (de C) nom (If other than -54°C)	2764
	*Pressure (mm Hg) nom	2766
	*Time for operation and measure ments (hours) nom	2768
	*Rate of pressure change (mm Hg per rein) nom	2770
1.2.51.2	Requirement (Select one) (Mandatory if either Code 2756, 2758, or 2760 is selected)	
	Requirements per Specification shown with Code 1006	2772
	or	
	Requirements per Specification shown with Code 1006 except .	2774
	or	
	Requirements as follows:	
	*Waveshape _ characteristics	2778
	*Deviation (percent)	2777
	Electrical continuity	2776

‘INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2,52	Strength of Mounting Means	
1.2.52.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	2800
	or	
	Test per Specification shown with Code 1006 except __.	2802
	or	
	Test as follows:	
	*Axial load (pounds) nom	2804
	*Time (minutes) nom	2806
	Torque (pound-inches)	2808
1.2.52. 2	Requirement (Select one) (Mandatory if either Code 2800, 2802, or 2804 is selected)	
	Requirements per Specification shown with Code 1006	2810
	or	

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.52.2 Cont.	Requirements per Specification shown with Code 1006 except .	2812
	or	
	Requirements as follows:	
	*There shall be no evidence of breakage, malfunction, or damage to impair performance	2814
1.2.53	Dielectric Withstanding Volts at Sea Level	
1.2.53.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	4860
	or	
	Test per Specification shown with Code 1006 except .	4861
	or	
	Test per Method 301 of MIL-STD-202	
	*Magnitude of test voltage (Enter applicable codes and values on SRS from Table XI)	
	*Nature of voltage (AC or DC)	4864

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT:

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.53.1 Cont.	*Points of application of test voltage shall be as shown in Table XI)	4865
	Special preparation or conditions shall be .	4866
	Time of application of test voltage (seconds)	4867
	Special method of connection of test voltage to specimen shall be .	4868
	Regulation of test voltage (percent)	4869
	Minimum kilovolt-ampere rating of high voltage source (KVA)	4870
	Limiting value of surge current (amps)	4871
	Measurements after test shall be ___.	4872
	Requirement (Select one) (Mandatory if either Code 4860, 4861, or 4863 is selected)	
	Requirements per Specification shown with Code 1006	4873
	or	

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.53.1 Cont.	Requirements per Specification shown with Code 1006 except ___.	4874
	or	
	Requirements as follows:	
	*Maximum leakage current (milliamps)	4875
	Requirements after test shall be ____.	4876
1.2.53	Dielectric Withstanding Volts at Reduced Barometric Pressure	
1.2.53.2	Test Procedure (Select one if required)	
	Test per Specificati on shown with Code 1006	4883
	or	
	Test per Specification shown with Code 1006 except ___.	4884
	or	
	Test per Method 301 of MIL-STD-202	
	*Altitude per (Test Condition Letter) of Method 105 of MIL-STD-202	

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA ,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
.2.53.2 (Cont.	*Magnitude of test voltage (Enter applicable codes and values on SRS from Table XI)	
	*Nature of potential (AC or DC)	4888
	*Points of application of test voltage shall be as shown in Table XI	4889
	Special preparation or conditions shall be .	4890
	Time of application of test voltage (seconds)	4891
	Special method of connection of test voltaqe to specimen shall be .	4892
	Regulation of test voltage (percent)	4893
	Minimum kilovolt-ampere rating of high voltage source (KVA)	4900
	Limiting value of surge current (amps)	4902
	Tests during subjection to reduced pressure shall be .	4903
	Measurements after test shall be .	4904

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.53.	Requirement (Select one) (Mandatory if either Code 4883, 4884, or 4886 is selected)	
	Requirements per Specification shown with Code 1006	4907
	or	
	Requirements per Specification shown with Code 1006 except ___.	4908
	or	
	Requirements as follows:	
	*Maximum leakage current (mill iamps)	4894
	Requirements after test shall be ___.	4895
1,2.54	Insulation Resistance	
1,2.54.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	1370
	or	
	Test per Specification shown with Code 1006 except ___.	1371
	or	

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.54.1 Cont.	Test per Method 302 of MIL-STD-202	
	*Condition (Select one)	
	Test Condition Letter	1378
	or	
	Test potential (Enter applicable codes and values on SRS from Table XII)	
	*points of measurement shall be shown in Table XII	1374
	Special preparation or conditions shall be .	1375
	Electrification time (minutes)	1376
	Measurement error at the insulation resistance value required (percent)	1377
1 .2.54.2	Requirement (Select one) (Mandatory if either Code 1370, 1371, 1373, or Table XII is selected)	
	Requirements per Specification shown with Code 1006	1379
	or	

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.54.2 Cont.	Requirements per Specification shown with Code 1006 except _____.	1380
	or	
	Requirements as follows:	
	*Min insulation resistance (Enter applicable codes and values on SRS from Table XII)	
1.2.55	Seal	
1.2.55.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	4733
	or	
	Test per Specification shown with Code 1006 except _____.	4734
	or	
	Test per Method 112 of MIL-STD-202	
	*Test Condition Letter	4737
	If Test Condition Letter is A or B	
	Liquid for test (write-in)	4738

'INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.55.1 Cont.	Temperature (deg C) nom	4739
	If Test Condition Letter is C	
	*Test procedure number	4740
	*Leakage rate sensitivity (std ATMcc/see) min	4741
	Backfill pressure, when required (psig) nom	4742
	Number of pressure cycles	4749
	If procedure III in Condition C	
	*Applicable gross leak test condition letter	4750
	If procedure IV in Condition C	
	*Chamber pressure (mm Hg) nom	4751
	*Duration of reduced pressure (minutes) nom	4752
	*Application gross leak test condition letter	4750

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.55.1 Cont.	If Test Condition Letter is D or E	
	Test mounting fixtures (if required) shall be .	4743
1.2.55.2	Requirement (Select one) (Mandatory if either Code 4733, 4734, or 4737 is selected)	
	Requirements per Specification shown with Code 1006	4744
	or	
	Requirements per Specification shown with Code 1006 except .	4745
	or	
	Requirements as follows:	
	*Leakage shall not exceed ____ (std ATM cc/see) max	4746
	or	
	*No visible bubbles indicative of leakage or leakage of compound if applicable	4747

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.56	Fungus	
1.2.56.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	4753
	or	
	Test per Specification shown with Code 1006 except _____.	4754
	or	
	Test per Method 508 of MIL-STD-810	4755
	Test period (if other than 28 days) (days)	4756
	Special measurements test shall be _____.	4758
1.2.56.2	Requirement (Select one) (Mandatory if eithr Code 4753, 4754, or 4755 if selected)	
	Requirements per Specification shown with Code 1006	4759
	or	
	Requirements per Specification shown with Code 1006 except _____.	4760
	or	

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.56.2 Cont.	Fungus resistant by certification	4761
	or	
	Requirements as follows:	
	*No fungus growth	4762
	Special requirements after test shall be .	4763
1.2.57	Resistance to Solvents	
1.2.57.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	4828
	or	
	Test per Specification shown with Code 1006 except .	4829
	or	
	Test per Method 215 of MIL-STD-202	
	*Portion of specimen to be brushed shall be .	4830
	*Number of specimens	4831
	Solvents to be added shall be .	4832

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STO-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.57.1 (Cont.	Solvents to be deleted shall be ___.	4836
	Measurements and examinations after test shall be ___.	4837
1.2.57.2	Requirement (Select one) (Mandatory if either Code 4828, 4829, or 4830 is selected)	
	Requirements per Specification shown with Code 1006	4833
	or	
	Requirements per Specification shown with Code 1006 except ___.	4834
	or	
	Requirements as follows:	
	*No physical damage or degradation	4840
	Requirements after test shall be ___.	4835
	Marking shall remain legible	4841
	Permissible extent of mechanical or electrical damage shall be ___.	4842

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.58	Radiographic (Method 209, MIL-STD-202 if required)	4843
	Negatives (Select one)	
	Delivered	4857
	or	
	Not delivered	4858
	Note: If 4843 is used, either Code 4857 or 4858 must be used	
1.2.59	Capacitance	
.2.59.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	1656
	or	
	Test per Specification shown with Code 1006 except .	1658
	or	
	Test per Method 305 of MIL-STD-202	
	*Test frequency (hertz) nom	1660
	Limit of accuracy (percent) min	1662

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.59.1 cont.	Magnitude of polarizing voltage (volts DC) nom	1664
1.2.59.2	Requirement (Select one) (Mandatory if either Code 1656, 1685, or 1660 is selected)	
	Requirements per Specification shown with Code 1006	1666
	or	
	Requirements per Specification shown with Code 1006 except .	1668
	or	
	Requirements as follows:	
	Total capacitance	
	*Nom (microfarads)	1676
	*+ or - (percent)	1678
	Long pulse network	
	*Nom (microfarads)	1680
	*+ or - (percent)	1682
	Short pulse network	
	*Nom (microfarads)	1684
	*+ or - (percent)	1686

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.59	Flammability (External Flame)	
1.2.59.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	2900
	or	
	Test per Specification shown with Code 1006 except _____.	2902
	or	
	Test per Method 111 of MIL-STD-202	
	*Point of impingement of applied flame shall be _____.	2904
	Direction of axis of flame shall be _____ (If other than vertical)	2906
	Time of flame application (If other than 15 seconds) (seconds)	2908

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.59.2	Requirement (Select one) (Mandatory if either Code 2900, 2902, or 2904 is selected)	
	Requirements per Specification shown with Code 1006	2911
	or	
	Requirements per Specification shown with Code 1006 except _____.	2912
	or	
	Requirements as follows:	
	*Flame shall become self-extinguished within (seconds) max	2914
1.2.59	Random Drop	
1.2.59.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	2916
	or	

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.59.1 Cont.	Test per Specification shown with Code 1006 except ___.	2918
	or	
	Test per Method 203 of MIL-STD-202	2919
	Fleasurements after test shall be ___,	2920
1.2.59.2	Requirement (Select one) (Mandatory if either Code 2916, 2918, or 2920 is selected)	I
	Requirements per Specification shown with Code 1006	2922
	or	
	Requirements per Specification shown with Code 1006 except ___.	*2924
	or	
	Requirements as follows:	
	*No evidence of physical damage or degradation of performance	*2926
	Requirements after test shall be ___.	*2927

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.59	Acceleration	
1.2.59.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	2928
	or	
	Test per Specification shown with Code 1006 except ___.	2930
	or	
	Test per Method 212 of MIL-STD-202	
	*Test Condition Letter	2932
	Special mounting of specimen shall be ___.	2934
	Electrical loading shall be ___.	2936
	"G" value nom (Test Condition A)	2940
	Measurements after test shall be ___.	2938
	Direction of acceleration (Test Condition B)	2942

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.59.2	Requirement (Select one) (Mandatory if either Code 2928, 2930, or 2932 is selected)	
	Requirements per Specification shown with Code 1006	2944
	or	
	Requirements per Specification shown with Code 1006 except ___.	2946
	or	
	Requirements as follows:	
	*No evidence of physical damage or degradation of performance	2948
	Requirements after test shall be ____.	2949
1.2.59	Explosion	
1.2.59.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	2780
	or	

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA.	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.59.1 Cont.	Test per Specification shown with Code 1006 except .	2782
	or	
	Test per Method 109 of MIL-STD-202	
	*Electrical load shall be .	2784
	Chamber temperature (deg C) (If other than 71 deg C)	2788
	*+ (deg C)	2790
	*- (deg C)	2792
1.2.59.2	Requirement (Select one) (Mandatory if either Code 2780, 2782, or 2784 is selected)	
	Requirements per Specification shown with Code 1006	2794
	or	
	Requirements per Specification shown with Code 1006 except .	2796
	or	

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.59.2 Cont.	Requirements as follows:	
	*No explosion in the test chamber	2798
	Soldering	
1.2.59	Solderability	
1.2.59.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	4661
	or	
	Test per Specification shown with Code 1006 except ____.	4662
	or	
	Test per Method 208 of MIL-STD-202	
	*Number of terminations tested	4666
	Depth of immersion (inches)	4667

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.59.1 Cont.	Size wire (AWG) (only if other than AWG 18)	4668
	Special preparation shall be ____.	4669
1.2.59.2	Requirement (Select one) (Mandatory if either Code 4661, 4662, or 4666 is selected)	
	Requirements per Specification shown with Code 1006	4673
	or	
	Requirements per Specification shown with Code 1006 except ___.	4674
	or	
	Requirements as follows:	
	*Per evaluation paragraph of Method 208 of MIL-STD-202	4675
1.2.59	Resistance to Soldering Heat	
1.2.59.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	4688
	or	

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.59.1 Cont.	Test per Specification shown with Code 1006 except ____.	4689
	or	
	Test per Method 210 of MIL-STD-202	
	*Test Condition Letter	4691
	*Number of terminations tested	4694
	Depth of immersion in molten solder (inch)	4692
	Depth of immersion in flux (inch)	4693
	Cooling time (minutes)	4695
	Special preparation shall be ____.	4696
1.2.59.2	Requirement (Select one) (Mandatory if either Code 4688, 4689, or 4691 is selected)	
	Requirements per Specification shown with Code 1006	4699
	or	

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.59.2 Cont.	Requirements per Specification shown with Code 1006 except ____.	4700
	or	
	Requirements as follows:	
	*No evidence of physical damage or degradation of performance	4701
1.2.59	Thermal Shock	
1.2.59.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	4712
	or	
	Test per Specification shown with Code 1006 except ____.	4713
	or	

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.59.1 Cont.	Test per Method 107 of MIL-STD-202	
	*Test Condition Letter	4715
	Special mounting shall be ____.	4716
	Measurements before test shall be ____.	4717
	Measurements after test shall be ____.	4718
1.2.59.2	Requirement (Select one) (Mandatory if either Code 4712, 4713, or 4715 is selected)	
	Requirements per Specification shown with Code 1006	4720
	or	
	Requirements per Specification shown with Code 1006 except ____.	4722
	or	
	Requirements as follows:	
	*No evidence of physical damage or degradation of performance	4724
	Requirements before test shall be ____.	4725
	Requirements after test shall be ____.	4726

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.59	Salt Spray	
1.2.59.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	4769
	or	
	Test per Specification shown with Code 1006 except ____.	4770
	or	
	Test per Method 101 of MIL-STD-202	
	*Test Condition Letter	4772
	Special mounting shall be ____.	4773
	Measurements after exposure shall be ____.	4774
1.2.59.2	Requirement (Select one) (Mandatory if either Code 4769, 4770, or 4772 is selected)	
	Requirements per Specification shown with Code 1006	4777
	or	

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.59.2 Cont.	Requirements per Specification shown with Code 1006 except ____.	4778
	or	
	Requirements as follows:	
	*No evidence of corrosion	4780
	Requirements after exposure shall be ____.	4781
1.2.59	Immersion	
1.2.59.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	4808
	or	
	Test per Specification shown with Code 1006 except ____.	4809
	or	
	Test per Method 104 of MIL-STD-202	

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.59.1 Cont.	*Test Condition Letter	4811
	Time after final cycle allowed for measurement shall be within (hours)	4812
	Time after final cycle prior to measurement shall be at least (hours)	4814
	Measurements after final cycle shall be ____.	4813
1.2.59.2	Requirement (Select one) (Mandatory if either Code 4808, 4809, or 4811 is selected)	
	Requirements per Specification shown with Code 1006	4818
	or	
	Requirements per Specification shown with Code 1006 except ____.	4819
	or	
	Requirements as follows:	
	*No evidence of leakage	4820
	Insulation resistance per Table XII	4821
	Requirements after final cycle shall be ____.	4822

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.59	Moisture Resistance	
1.2.59.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	1390
	or	
	Test per Specification shown with Code 1006 except ____.	1391
	or	
	Test per Method 106 of MIL-STD-202	
	*Initial measurements shall be ____.	1393
	Condition for initial measurements shall be ____.	1394
	Polarizing voltage (volts)	1395
	Loading voltage (volts)	1396
	Final measurements shall be ____.	1397

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.59.2	Requirement (Select one) (Mandatory if either Code 1390, 1391, or 1393 is selected)	
	Requirements per Specification shown with Code 1006	1399
	or	
	Requirements per Specification shown with Code 1006 except ____.	1400
	or	
	Requirements as follows:	
	*No excessive corrosion	1401
	Insulation resistance per table XII	1402
	Requirements before test shall be ____.	1403
	Requirements after test shall be ____.	1404
1.2.59	Terminal Strength	
1.2.59.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	1409
	or	

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.59.1 Cont.	Test per Specification shown with Code 1006 except .	1410
	or	
	Test per Method 211 of MIL-STD-202	
	*Test Conditions (Select one or more as required)	
	Test Condition A, applied force (pounds)	1411
	Test Condition B, number of bends shall be .	1412
	Test Condition C, load (pounds)	1413
	Test Condition D	1414
	Test Condition E	1415
	or	
	Test Condition E, torque (pound-inches)	1416

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA.	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.59.2	Requirement (Select one) (Mandatory if either Code 1409, 1410 or any of 1411 through 1416 is selected)	
	Requirements per Specification shown with Code 1006	1417
	or	
	Requirements per Specification shown with Code 1006 except _____.	1418
	or	
	Requirements as follows:	
	*No part of the terminals shall loosen or rupture and no other damage shall result. Bends shall not be considered as damage unless cracking of finish is evident.	1419
	Permanent rotation shall not exceed 10 degrees	1420
	Rotation of hook type terminal may exceed 10 degrees	1421

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CHARACTERISTIC CODE
	Vibration	
1.2.59	Random Vibration	
1.2.59.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	1425
	or	
	Test per Specification shown with Code 1006 except .	1426
	or	
	Test per Method 214 of MIL-STD-202	
	*Test condition number and letter, i.e. IA	1428
	*Duration of test (minutes)	1429
	No. of test points and location	1430
	Special method of mounting shall be .	1431

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA.	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.59.2	Requirement (Select one) (Mandatory if either Code 1425, 1426, or 1428 is selected)	
	Requirements per Specification shown with Code 1006	1433
	or	
	Requirements per Specification shown with Code 1006 except _	1434
	or	
	Requirements as follows:	
	*No intermittent operation or short circuiting during vibration. After test, no physical damage or degradation of performance	1435
	Vibration	
1.2.59.1	High Frequency	
	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	1445
	or	

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.59.1 Cont.	Test per Specification shown with Code 1006 except _____.	1446
	or	
	Test per Method 204 of MIL-STD-202	
	*TeSt Condition Letter	1448
	Special mounting of specimens shall be _____.	1449
	Electrical load condition shall be _____.	1450
	Method of determining resonance shall be _____.	1451
	Measurements after test shall be _____.	1452
1.2.59.2	Requirement (Select one) (Mandatory if either Code 1445, 1446, or 1448 is selected)	
	Requirements per Specification shown with Code 1006	1454
	or	

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.59.2 Cont.	Requirements per Specification shown with Code 1006 except ___.	1455
	or	
	Requirements as follows:	
	*No intermittent operation or short circuiting during vibration. After the test, no physical damage or degradation of performance	1456
	Requirements after test shall be ___.	1457
	Vibration	
1.2.59	Low Frequency	
1.2.59.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	1465
	or	
	Test per Specification shown with Code 1006 except ___.	1466
	or	

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.59.1 Cont.	Test per Method 201 of MIL-STD-202	1467
	Measurements prior to vibration shall be ___.	1468
	Special mounting methods shall be ___.	1469
	Measurements after vibration shall be ___.	1473
	Duration of application per axis (hours) (If other than 2 hours)	1470
	Direction of motion shall be ____.	1471
	Electrical load conditions shall be ___.	1472
	Number of axes	1484
1.2.59.2	Requirement (Select one) (Mandatory if either Code 1465, 1466, or 1468 is selected)	
	Requirements per Specification shown with Code 1006	1474
	or	

'INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA.	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.59.2 Cont.	Requirements per Specification shown with Code 1006 except ___.	1475
	or	
	Requirements as follows:	
	*No intermittent operation or short circuiting during vibration. After the test, no physical damage or degradation of performance	1476
	Requirements before test shall be ___.	1477
	Requirements after test shall be ___.	1478
	Shock	
1.2.59	High Impact	
1.2.59.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	1485
	or	
	Test per Specification shown with Code 1006 except ___.	1486
	or	

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.59.1 Cont.	Test per Method 207 of MIL-STD-202	
	*Mounting fixture shall be ____ (Fig. no. of Method 207 of MIL-STD-202 or write-in)	1488
	Electrical load or operating condition shall be __.	1489
	External resilient mountings shall be __.	1490
	Monitoring during tests shall be ____.	1491
	Measurement after test shall be ____.	1492
1.2.59.2	Requirement (Select one) (Mandatory if either Code 1485, 1486, or 1488 is selected)	
	Requirements per Specification shown with Code 1006	1493
	or	
	Requirements per Specification shown with Code 1006 except .	1494
	or	

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.59.2 Cont.	Requirements as follows:	
	*No evidence of physical damage or degradation of performance	1495
	Requirements after test shall be ___.	1496
	Shock	
1.2.59	Specified Pulse	
1.2.59.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	1501
	or	
	Test per Specification shown with Code 1006 except ___.	1502
	or	

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.59.1 Cont.	Test per Method 213 of MIL-STD-202	
	*Test Condition Letter	1504
	Special mounting method shall be ___.	1505
	Measurements before test shall be ___.	1506
	Measurements during test shall be ___.	1511
	Measurements after test shall be ___.	1512
1.2.59.2	Requirement (Select one) (Mandatory if either Code 1501, 1502, or 1504 is selected)	
	Requirements per Specification shown with Code 1006	1507
	or	
	Requirements per Specification shown with Code 1006 except ___.	1508
	or	
	Requirements as follows:	
	*No evidence of physical damage or degradation of performance	1509

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.59.2 Cont.	Requirements before test shall be ___.	1510
	Requirements during test shall be ___.	1513
	Requirements after test shall be ___.	1514
1.2.60	Humidity	
1.2.60.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	4787
	or	
	Test per Specification shown with Code 1006 except ___.	4788
	or	
	Test per Method 103 of MIL-STD-202	
	*Test Condition Letter	4790
	*Points of application of polarizing voltage shall be ___.	4793
	Measurements after conditioning shall be ___.	4791

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.60.1 Cont.	Duration of application of polarizing voltage shall be	4792
	Final measurements at high humidity shall be .	4794
	Polarizing voltage (volts DC)	4804
1.2.60.2	Requirement (Select one) (Mandatory if either Code 4787, 4788, or 4790 is selected)	
	Requirements per Specification shown with Code 1006	4796
	or	
	Requirements per Specification shown with Code 1006 except .	4797
	or	
	Requirements as follows:	
	*No evidence of phusical damage or degradation of Performance	4798
	Insulation resistance per Table XII	4799
	Requirements at high humidity shall be .	4800
	Requirements after drying shall be .	4801

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.61	Workmanship	
	(Shall be in accordance with)	6870
1.2.62	*Source (Select one of the following and complete at least one line of the Source Table)	
	Source Control	6873
	or	
	Specification Control	6874
1.2.63	Superseded Document	6871
	*Date	6872

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE REQUIREMENTS

SEE MIL-STD-36 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.10	*First Article Inspection - Select One	
	First Article Inspection on this item in accordance with the testing in the applicable general specification and in the order specified herein. (Complete Appendix C with all required tests in desired order of testing.)	1540
	First Article Inspection on this item in accordance with the testing in the applicable general specification.	1541
	First Article Inspection not required.	1542
	First Article Inspection on this item in accordance with the testing in the applicable general specification except as shown on Appendix J. (Complete Appendix J, listing all tests to be deleted.)	7021
	First Article Inspection on this item in accordance with Appendix C (Complete Appendix C with all required tests in desired order of testing.)	7022

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.10 Cont.	First Article Inspection on this item in accordance with the testing in the applicable general specification except (Specify exact words, limited to 189 characters, including punctuation and spaces.)	7023
1.2.64	First Article Test Data (Select one, if not required leave blank.)	
	First Article Test Data	7024
	First Article Test Data on a similar item.	1543
1.2.10	*Group A Inspection - Select One	
	Group A inspection on this item in accordance with the applicable general military specification and in the order specified herein. (Complete Appendix D with all required tests in desired order of testing.)	1545
	Group A inspection on this item in accordance with the applicable general military specification with additional tests required. (Complete Appendix D with the added tests only. Complete Appendix G with the sequence.)	1546

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.10 Cont.	Group A inspection on this item in accordance with the applicable general military specification with certain tests deleted. (Complete Appendix H showing deleted tests.)	1547
	Group A inspection on this item in accordance with the applicable general military specification.	1548
	Group A inspection on this item-in accordance with Appendix D (complete Appendix D with all required tests in the desired order of testing) if this code is used, Code 7033 or 7034 is mandatory.	7031
	*Group A sampling plan is specified in MIL-STD-105. (Show inspection level and AQL in Appendix D) (if sub groups are used, use Code 7036)	7033
	or	

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.10 Cont.	*Group A sampling plan shall be 100 percent with defective units removed. (Show 100 percent in Appendix D)	7034
	Lot shall be rejected if defective exceed _____ percent (Use with 7034 inapplicable)	7035
	Tests in each Group A inspection subgroup shall be combined for inspection. (Use this code if Appendix D shows subgroups)	7036
	Group A inspection on this item in accordance with applicable general military specification except ____ (Specify exact words, limited to 189 characters, including punctuation and spaces.)	7032
1.2.64	Group A Test Data to be recorded	1549
1.2.10	*Group B Inspection - Select One	
	Group B inspection on this item in accordance with the applicable general specification and in the order specified herein. (Complete Appendix El or E2 as applicable with all required tests in desired order of testing.)	1550

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN

REF, PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.10 Cont.	Group B inspection on this item in accordance with the applicable general military specification with additional tests required. (Complete Appendix El or E2 as applicable with the added tests only. Complete Appendix G with the sequence.)	1551
	Group B inspection on this item in accordance with the applicable general military specification with certain tests deleted. (Complete Appendix H showing deleted tests.)	1552
	Group B inspection on this item in accordance with the applicable general military specification.	1553
	Group B inspection on similar items in accordance with the applicable general military specification.	1554
	Group B inspection on this item in accordance with Appendix E-1 for sample as specified in the table. (Complete Appendix E-1 with all required tests in the desired order of testing.)	7041

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF. PARA.	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.10 Cont.	Group B inspection on this item in accordance with Appendix E-2 for statistical Sampling in accordance with MIL-STD-105. (Complete Appendix E-2 with all required tests in desired order of testing.)	7044
	Group B inspection on this item in accordance with applicable general military specification except (Specify exact words, limited to 189 characters, including punctuation and spaces.)	7042
1.2.64	Group B test Data to be recorded.	7043
1.2.10	Group C Inspection - Select One (if required).	
	Group C inspection on this item in accordance with the applicable general military specification and in the order specified herein. (Complete Appendix F with all required tests in desired order of test.)	1555
	Group C inspection on this item in accordance with the applicable general military specification with additional tests required. (Complete Appendix F with the added tests only. Complete Appendix G the sequence.)	1556

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.10 Cont.	Group C inspection on this item in accordance with the applicable general military specification with certain tests deleted. (Complete Appendix H showing deleted tests.)	1557
	Group C inspection on this item in accordance with the applicable general military specification.	1558
	Group C inspection on similar items in accordance with the applicable general military specification.	1559
	Group C inspection on this item in accordance with Appendix F. (Complete Appendix F with all required tests in desired order of testing.)	7053
	Group C inspection on this item in accordance with applicable general military specification except (Specify exact words,limited to 189 characters, including punctuation and spaces.)	7054
1.2.64	Group C Test Data to be recorded.	7055
1.2.64	*Test Methods - Select One	
	As stated herein.	1560
	Alternate methods permitted.	1561

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIAL REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.8	Additional Requirements(s) (List each requirement separately starting with code 7001, 7002, etc. and limiting each to 189 characters including punctuation, and spaces).	7001 7002 7003 7004 7005
1.2.8	Marking requirements (List each requirement separately starting with Code 6991 6992, etc. and limiting each to 189 characters including punctuation and spaces).	6991 6992 6993 6994 6995
1.2.8	Additional Quality Assurance Provisions (List each item separately starting with Code 7011, 7012, etc. and limiting each to 189 characters including punctuation and spaces).	7011

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIAL REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.8 Cont.		7012
		7013
		7014
		7015
1.2.8	Packaging Requirement(s) for Section 5 (List each requirement separately starting with Code 7006, 7007, etc. and limiting each to 189 characters including punctuation, and spaces).	7006
		7007
		7008
		7009
		7010
1.2.8	Additional Note(s) for Section 6 (List each requirement separately starting with Code 7016, 7017, etc. and limiting each to 189 characters including punctuation, and spaces).	7016
		7017
		7018
		7019
		7020

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. MOUNTING HARDWARE TABLE

(See 1.2.22)

ITEM	TYPE		SIZE		LENGTH/THICKNESS		QUANTITY	
	Code	Value	Code	Value	Code	Value	Code	Value
Screw	2090		2091		2902		2093	
Washer	2094		2095		2096		2097	
Washer	2098		2099		2100		2101	
Nut	2102		2103		2104		2105	
Clamp	2106		2107		2108		2109	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE II. MOUNTING HARDWARE MATERIAL TABLE

(See 1.2.22)

ITEM	MATERIAL		MATERIAL SPECIFICATION	
	Code	Value	Code	Value
Screw	2115		2116	
Washer	2117		2118	
Washer	2119		2120	
Nut	2121		2122	
Clamp	2123		2124	

TABLE III. MOUNTING HARDWARE FINISH TABLE

(See 1.2.22)

ITEM	FINISH		FINISH SPECIFICATION		FINISH THICKNESS (INCH) MIN	
	Code	Value	Code	Value	Code	Value
Screw	2127		2128		2129	
Washer	2130		2131		2132	
Washer	2133		2134		2135	
Nut	2136		2137		2138	
Clamp	2139		2140		2141	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE IV. WIRING TABLE

(See 1.2.24)

FUNCTION		INPUT TERMINAL		OUTPUT TERMINAL	
Code	Value	Code	Value	Code	Value
3101		3102		3103	
3104		3105		3106	
3107		3108		3109	
3110		3111		3112	
3113		3114		3115	
3116		3117		3118	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE V. TERMINAL TABLE

(See 1.2.33)

TERMINAL Types, Materials, and Finishes	Column 1 INPUT TERMINAL		Column 2 OUTPUT TERMINAL		Column 3 GROUND TERMINAL		Column 4 ALL	
	Code	Value	Code	Value	Code	Value	Code	Value
Terminal Type (Select one) Lug Threaded stud Threaded insert Screw Wire hook Pin Other (write in)	2201		2202		2203		2204	
Terminal Type Specification	2211		2212		2213		2214	
Terminal Material	2221		2222		2223		2224	
Terminal Material Specification	2231		2232		2233		2234	
Terminal Finish	2241		2242		2243		2244	
Terminal Finish Thickness (inches) min	2251		2252		2253		2254	
Terminal Finish Specification	2261		2262		2263		2264	

NOTE: If terminals are different types, use Columns 1, 2, and/or 3, as required.
If all terminals are the same type, use Column 4, but not Columns 1, 2, and 3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE VI. TERMINAL HARDWARE TABLE

(See 1.2.33)

ITEM	TYPE		SIZE		LENGTH/THICKNESS		QUANTITY	
	Code	Value	Code	Value	Code	Value	Code	Value
Washer	2145		2146		2147		2148	
Washer	2149		2150		2151		2152	
Screw	2153		2154		2155		2156	
Nut	2157		2158		2159		2160	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE VII. TERMINAL HARDWARE MATERIAL TABLE

(See 1.2.33)

ITEM	MATERIAL		MATERIAL SPECIFICATION	
	Code	Value	Code	Value
Washer	2165		2166	
Washer	2167		2168	
Nut	2171		2172	
Screw	2173		2174	

TABLE VIII. TERMINAL HARDWARE FINISH TABLE

(See 1.2.33)

ITEM	FINISH		FINISH SPECIFICATION		FINISH THICKNESS (INCH) MIN	
	Code	Value	Code	Value	Code	Value
Washer	2175		2176		2177	
Washer	2178		2179		2180	
Nut	2184		2185		2186	
Screw	2187		2188		2189	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE IX. BODY, MATERIAL, AND FINISH TABLE

(See 1.2.35)

BODY Materials and Finishes	CASE		SEAL		MOUNTING MEANS	
	Code	Value	Code	Value	Code	Value
Material	2301		2302		2303	
Material Specification	2311		2312		2313	
Finish	2321		N/A		2323	
Finish Thickness (inches) min	2331		N/A		2333	
Finish Specification	2341		N/A		2343	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE X. WAVESHAPE CHARACTERISTICS TABLE

(See 1.2.44)

CHARACTERISTIC	Column 1		Column 2		Column 3		Column 4		Column 5	
	OUTPUT PULSE		PULSE TRANSFORMER		PULSE FORMING NETWORK		LONG PULSE NETWORK		SHORT PULSE NETWORK	
	Code	Value	Code	Value	Code	Value	Code	Value	Code	Value
Pulse Duration										
Nom (microseconds)	2501		2502		2503		2504		2505	
Min (microseconds)	2511		2512		2513		2514		2515	
Max (microseconds)	2521		2522		2523		2524		2525	
Percent Ripple										
Max (percent)	2531		2532		2533		2534		2535	
Pulse Rise Time										
Min (microseconds)	2551		2552		2553		2554		2555	
Max (microseconds)	2561		2562		2563		2564		2565	
Pulse Decay Time										
Min (microseconds)	2581		2582		2583		2584		2585	
Max (microseconds)	2591		2592		2593		2594		2595	
Characteristic Impedance										
Nom (ohms)	2601		2602		2603		2604		2605	
Min (ohms)	2611		2612		2613		2614		2615	
Max (ohms)	2621		2622		2623		2624		2625	
Pulse Amplitude										
Min (volts)	2631		2632		2633		2634		2635	
Max (volts)	2641		2642		2643		2644		2645	
Duty Cycle										
Nom (percent)	2651		2652		2653		2654		2655	
Min (percent)	2661		2662		2663		2664		2665	
Max (percent)	2671		2672		2673		2674		2675	
Pulse Droop										
Max (percent)	2681		2682		2683		2684		2685	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE XI. DIELECTRIC WITHSTANDING VOLTAGE TABLE

(See 1.2.53)

FROM TERMINAL NO.		TO TERMINAL NO.		TEST VOLTAGE SEA LEVEL (VOLTS)		TEST VOLTAGE REDUCED PRESSURE (VOLTS)	
Code	Value	Code	Value	Code	Value	Code	Value
4351		4352		4353		4354	
4355		4356		4357		4359	
4359		4360		4361		4362	
4363		4364		4365		4366	
4367		4368		4369		4370	
4371		4372		4373		4374	
4375		4376		4377		4378	
4379		4380		4381		4382	
4383		4384		4385		4386	
4387		4388		4389		4390	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE XII. INSULATION RESISTANCE TABLE

(See 1.2.54)

FROM TERMINAL NO.		TO TERMINAL NO.		MIN INSULATION RESISTANCE (MEGOHMS)		TEST TEMPERATURE (DEG C)		TEST POTENTIAL (VOLTS)	
Code	Value	Code	Value	Code	Value	Code	Value	Code	Value
3201		3202		3203		3204		3206	
3207		3208		3209		3210		3211	
3212		3213		3214		3215		3216	
3217		3218		3219		3220		3221	
3222		3223		3224		3225		3226	
3227		3228		3229		3230		3231	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX A - DIMENSION CHARACTERISTIC TABLE

(See 1.2.6)

Dimension		Minimum		Maximum	
Code	Legend	Code	Value	Code	Value
1010	AA	1011		1012	
1013	AB	1014		1015	
1016	AC	1017		1018	
1019	AD	1020		1021	
1022	AE	1023		1024	
1025	AF	1026		1027	
1028	AG	1029		1030	
1031	AH	1032		1033	
1034	AJ	1035		1036	
1037	AK	1038		1039	
1040	AL	1041		1042	
1043	AM	1044		1045	
1046	AN	1047		1048	
1049	AP	1050		1051	
1052	AQ	1053		1054	
1055	AR	1056		1057	
1058	AS	1059		1060	
1061	AT	1062		1063	
1064	AU	1065		1066	
1067	AV	1068		1069	
1070	AW	1071		1072	
1073	AX	1074		1075	
1076	AY	1077		1078	
1079	AZ	1080		1081	
1082	BA	1083		1084	
1085	BB	1086		1087	
1088	BC	1089		1090	
1091	BD	1092		1093	
1094	BE	1095		1096	
1097	BF	1098		1099	

Dimension		Minimum		Maximum	
Code	Legend	Code	Value	Code	Value
1100	BG	1101		1102	
1103	BH	1104		1105	
1106	BJ	1107		1108	
1109	BK	1110		1111	
1112	BL	1113		1114	
1115	BM	1116		1117	
1118	BN	1119		1120	
1121	BP	1122		1123	
1124	BQ	1125		1126	
1127	BR	1128		1129	
1130	BS	1131		1132	
1133	BT	1134		1135	
1136	BU	1137		1138	
1139	BV	1140		1141	
1142	BW	1143		1144	
1145	BX	1146		1147	
1148	BY	1149		1150	
1151	BZ	1152		1153	
1154	CA	1155		1156	
1157	CB	1158		1159	
1160	CC	1161		1162	
1163	CD	1164		1165	
1166	CE	1167		1168	
1169	CF	1170		1171	
1172	CG	1173		1174	
1175	CH	1176		1177	
1178	CJ	1179		1180	
1181	CK	1182		1183	
1184	CL	1185		1186	
1187	CM	1188		1189	

Specification Requirement Sheet must contain applicable Codes, Legends, and Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX A - DIMENSION CHARACTERISTIC TABLE

(See 1.2.6)

Dimension		Minimum		Maximum	
Code	Legend	Code	Value	Code	Value
1190	CN	1191		1192	
1193	CP	1194		1195	
1196	CQ	1197		1198	
1199	CR	1200		1201	
1202	CS	1203		1204	
1205	CT	1206		1207	
1208	CU	1209		1210	
1211	CV	1212		1213	
1214	CW	1215		1216	
1217	CX	1218		1219	
1220	CY	1221		1222	
1223	CZ	1224		1225	
1226	DA	1227		1228	
1229	DB	1230		1231	
1232	DC	1233		1234	
1235	DD	1236		1237	
1238	DE	1239		1240	
1241	DF	1242		1243	
1244	DG	1245		1246	
1247	DH	1248		1249	
1250	DJ	1251		1252	
1253	DK	1254		1255	
1256	DL	1257		1258	
1259	DM	1260		1261	
1262	DN	1263		1264	
1265	DP	1266		1267	
1268	DQ	1269		1270	
1271	DR	1272		1273	
1274	DS	1275		1276	
1277	DT	1278		1279	

Dimension		Minimum		Maximum	
Code	Legend	Code	Value	Code	Value
1280	DU	1281		1282	
1283	DV	1284		1285	
1286	DW	1287		1288	
1289	DX	1290		1291	
1292	DY	1293		1294	
1295	DZ	1296		1297	
1298	EA	1299		1300	
1301	EB	1302		1303	
1304	EC	1305		1306	
1307	ED	1308		1309	
1310	EE	1311		1312	
1313	EF	1314		1315	
1316	EG	1317		1318	
1319	EH	1320		1321	
1322	EJ	1323		1324	
1325	EK	1326		1327	
1328	EL	1329		1330	
1331	EM	1332		1333	
1334	EN	1335		1336	
1337	EP	1338		1339	
1340	EQ	1341		1342	
1343	ER	1344		1345	
1346	ES	1347		1348	
1349	ET	1350		1351	
1352	EU	1353		1354	
1355	EV	1356		1357	
1358	HT	1359		1360	
1361	ID	1362		1363	
1364	OD	1365		1366	
1367	TH	1368		1369	

Specification Requirement Sheet must contain applicable Codes, Legends, and Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX B - APPLICABLE DOCUMENTS

(See 1.2.9)

Characteristic Code	Federal Spec. Number
6015	
6016	
6017	
6018	
6019	
6020	
6021	
6022	
6023	
6024	

Characteristic Code	Military Spec. Number
6035	
6036	
6037	
6038	
6039	
6040	
6041	
6042	
6043	
6044	

Characteristic Code	Federal Standard
6055	
6056	
6057	
6058	
6059	
6060	
6061	
6062	
6063	
6064	

Characteristic Code	Military Standard
6075	
6076	
6077	
6078	
6079	
6080	
6081	
6082	
6083	
6084	

Characteristic Code	Other Publications
6095	
6096	
6097	
6098	
6099	
6100	

Specification Requirement Sheet must contain applicable Codes and Document Numbers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX C - FIRST ARTICLE INSPECTION

(See 1.2.10)

Group Number		Test Title		Number Units		Allowable Failures	
Code	Value	Code	Value	Code	Value	Code	Value
6125		6126		6127		6128	
6129		6130		6131		6132	
6133		6134		6135		6136	
6137		6138		6139		6140	
6141		6142		6143		6144	
6145		6146		6147		6148	
6149		6150		6151		6152	
6153		6154		6155		6156	
6157		6158		6159		6160	
6161		6162		6163		6164	
6165		6166		6167		6168	
6169		6170		6171		6172	
6173		6174		6175		6176	
6177		6178		6179		6180	
6181		6182		6183		6184	
6185		6186		6187		6188	
6189		6190		6191		6192	
6193		6194		6195		6196	
6197		6198		6199		6200	
6201		6202		6203		6204	
6205		6206		6207		6208	
6209		6210		6211		6212	
6213		6214		6215		6216	
6217		6218		6219		6220	
6221		6222		6223		6224	
6225		6226		6227		6228	
6229		6230		6231		6232	
6233		6234		6235		6236	
6237		6238		6239		6240	
6241		6242		6243		6244	
6245		6246		6247		6248	

Specification Requirement Sheet must contain Codes and applicable Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX D - GROUP A QUALITY CONFORMANCE INSPECTION

(See 1.2.10)

Test Title		Quantity Inspected		AQL			
				Major		Minor	
Code	Value	Code	Value	Code	Value	Code	Value
6315		6316		6317		6318	
6319		6320		6321		6322	
6323		6324		6325		6326	
6327		6328		6329		6330	
6331		6332		6333		6334	
6335		6336		6337		6338	
6339		6340		6341		6342	
6343		6344		6345		6346	
6347		6348		6349		6350	
6351		6352		6353		6354	
6355		6356		6357		6358	
6359		6360		6361		6362	
6363		6364		6365		6366	
6367		6368		6369		6370	
6371		6372		6373		6374	
6375		6376		6377		6378	

Specification Requirement Sheet must contain Codes and applicable Values.

SOURCE TABLE

(See 1.2.62)

SOURCE(S)			
CODE	FSCM	CODE	MFG. PART NO.
5001		5002	
5003		5004	
5005		5006	
5007		5008	
5009		5010	
5011		5012	

Specification Requirement Sheet must contain Codes, FSCM and Part Number.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

(See 1.2.10) APPENDIX E-1 GROUP B QUALITY CONFORMANCE INSPECTION

Test Title		FIXED SAMPLE PLAN			
		Quantity Inspected		Defects Allowed	
Code	Value	Code	Value	Code	Value
6410		6411		6412	
6413		6414		6415	
6416		6417		6418	
6419		6420		6421	
6422		6423		6424	
6425		6426		6427	
6428		6429		6430	
6431		6432		6433	
6434		6435		6436	
6437		6438		6439	
6440		6441		6442	
6443		6444		6445	
6446		6447		6448	
6449		6450		6451	
6452		6453		6454	
6455		6456		6457	
6458		6459		6460	
6461		6462		6463	
6464		6465		6467	
6467		6468		6469	
6470		6471		6472	
6473		6474		6475	
6476		6477		6478	
6479		6480		6481	
6482		6483		6484	

Specification Requirement Sheet must contain Codes and Applicable Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

(See 1.2.10) APPENDIX E-2 GROUP B QUALITY CONFORMANCE INSPECTION

Test Title		STATISTICAL SAMPLE PLAN			
		Inspection Level		AQL	
Code	Value	Code	Value	Code	Value
6410		6715		6716	
6413		6717		6718	
6416		6719		6720	
6419		6721		6722	
6422		6723		6724	
6425		6725		6726	
6428		6727		6728	
6431		6729		6730	
6434		6731		6732	
6437		6733		6734	
6440		6735		6736	
6443		6737		6738	
6446		6739		6740	
6449		6741		6742	
6452		6743		6744	
6455		6745		6746	
6458		6747		6748	
6461		6749		6750	
6464		6751		6752	
6467		6753		6754	
6470		6755		6756	
6473		6757		6758	
6476		6759		6760	
6479		6761		6762	
6482		6763		6764	

Specification Requirement Sheet must contain Codes and applicable Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX F - GROUP C QUALITY CONFORMANCE INSPECTION

(See 1.2.10)

Test Title		Quantity Inspected		Defects Allowed	
Code	Value	Code	Value	Code	Value
6525		6526		6527	
6528		6529		6530	
6531		6532		6533	
6534		6535		6536	
6537		6538		6539	
6540		6541		6542	
6543		6544		6545	
6546		6547		6548	
6549		6550		6551	
6552		6553		6554	
6555		6556		6557	
6558		6559		6560	
6561		6562		6563	
6564		6565		6566	
6567		6568		6569	
6570		6571		6572	
6573		6574		6575	
6576		6577		6578	
6579		6580		6581	
6582		6583		6584	
6585		6586		6587	
6588		6589		6590	
6591		6592		6593	
6594		6595		6596	
6597		6598		6599	
6600		6601		6602	
6603		6604		6605	
6606		6607		6608	
6609		6610		6611	
6612		6613		6614	

Specification Requirement Sheet must contain Codes and applicable Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX G - QUALITY CONFORMANCE SEQUENCE TABLE

(See 1.2.10)

Group A Test Title Added		Group A Preceding Inspection Test	
Code	Value	Code	Value
6810		6811	
6812		6813	
6814		6815	
6816		6817	
6818		6819	
6820		6821	
6822		6823	
6824		6825	
6826		6827	
6828		6829	
6830		6831	
6832		6833	
6834		6835	
6836		6837	
6838		6839	

Specification Requirement Sheet must contain Codes and applicable Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX G - QUALITY CONFORMANCE SEQUENCE TABLE

(See 1.2.10)

Group B Test Title Added		Group B Preceding Inspection Test	
Code	Value	Code	Value
6840		6841	
6842		6843	
6844		6845	
6846		6847	
6848		6849	
6850		6851	
6852		6853	
6854		6855	
6856		6857	
6858		6859	
6860		6861	
6862		6863	
6864		6865	
6866		6867	
6868		6869	

Specification Requirement Sheet must contain Codes and applicable Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX G - QUALITY CONFORMANCE SEQUENCE TABLE

(See 1.2.10)

Group C Test Title Added		Group C Preceding Inspection Test	
Code	Value	Code	Value
6950		6951	
6952		6953	
6954		6955	
6956		6957	
6958		6959	
6960		6961	
6962		6963	
6964		6965	
6966		6967	
6968		6969	
6970		6971	
6972		6973	
6974		6975	
6976		6977	
6978		6979	

Specification Requirement Sheet must contain Codes and applicable Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX H - DELETED TEST TABLE
(When specific tests are not required)

(See 1.2.10)

Group A Deleted Test Title		Group B Deleted Test Title		Group C Deleted Test Title	
Code	Value	Code	Value	Code	Value
6875		6890		6905	
6876		6891		6906	
6877		6892		6907	
6878		6893		6908	
6879		6894		6909	
6880		6895		6910	
6881		6896		6911	
6882		6897		6912	
6883		6898		6913	
6884		6899		6914	
6885		6900		6915	
6886		6901		6916	
6887		6902		6917	
6888		6903		6918	
6889		6904		6919	

Specification Requirement Sheet must contain applicable Codes and Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX J - DELETED FIRST ARTICLE TESTS

(See 1.2.10)

FIRST ARTICLE DELETED TEST TITLE	
CODE	VALUE
6980	
6981	
6982	
6983	
6984	
6985	
6986	
6987	
6988	
6989	

Specification Requirement Sheet must contain Codes and applicable Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 1.3

CONFIGURATION AND DRAWINGS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 1.3.1

FIGURE TITLES VS FIGURE NUMBERS

Title	Figure Number
Network, Pulse Forming	Ø65-Øl-l thru 6
Circuit Diagram	Ø65-Ø2-l thru 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 1.3.2

LEGEND INDEX

AA	Overall length
AB	Overall width
AC	Overall height
AD	Body length
AE	Mounting stud. thread
AF	Mounting insert thread
AG	Terminal stud thread
AH	Ground stud thread
AJ	Terminal length
AK	Mounting stud length
AL	Terminal diameter
AM	Ground stud length
AN	Mounting centers parallel to width
AP	Mounting centers parallel to height
AQ	Terminals 1 and 2 to edge of body
AR	Terminals 4 and 6 to edge of body
AS	Terminals 5 and 7 to edge of body
AT	Terminal centers parallel to height
AU	Terminal 3 to edge of body
AV	Ground terminal to edge of body
AW	Mounting bracket height

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 1.3.2 LEGEND INDEx (CONT)

AX	Mounting bracket to mounting stud
AY	Connector type
AZ	Connector center to terminal center
BA	Body height
BB	Mounting hole size
BC	Terminal centers parallel to width
BD	Body width
BE	Mounting bracket thickness
BF	Bushing thread
BG	Handle centers
BH	Handle length
BJ	Terminal center to mounting center
BK	Mounting bracket width
BL	Terminal 1 to edge of bracket
BM	Terminal 1 and 2 centers
BN	Terminals 1 and 3 centers
BP	Mounting centers parallel to length

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

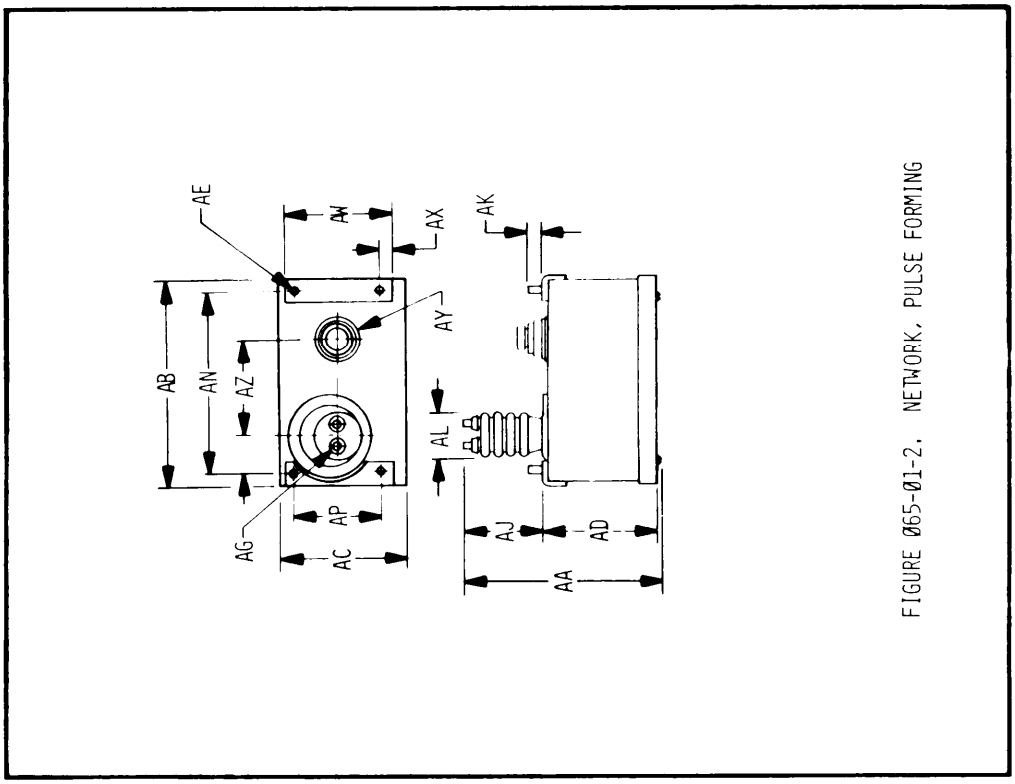


FIGURE Ø65-Ø1-2. NETWORK, PULSE FORMING

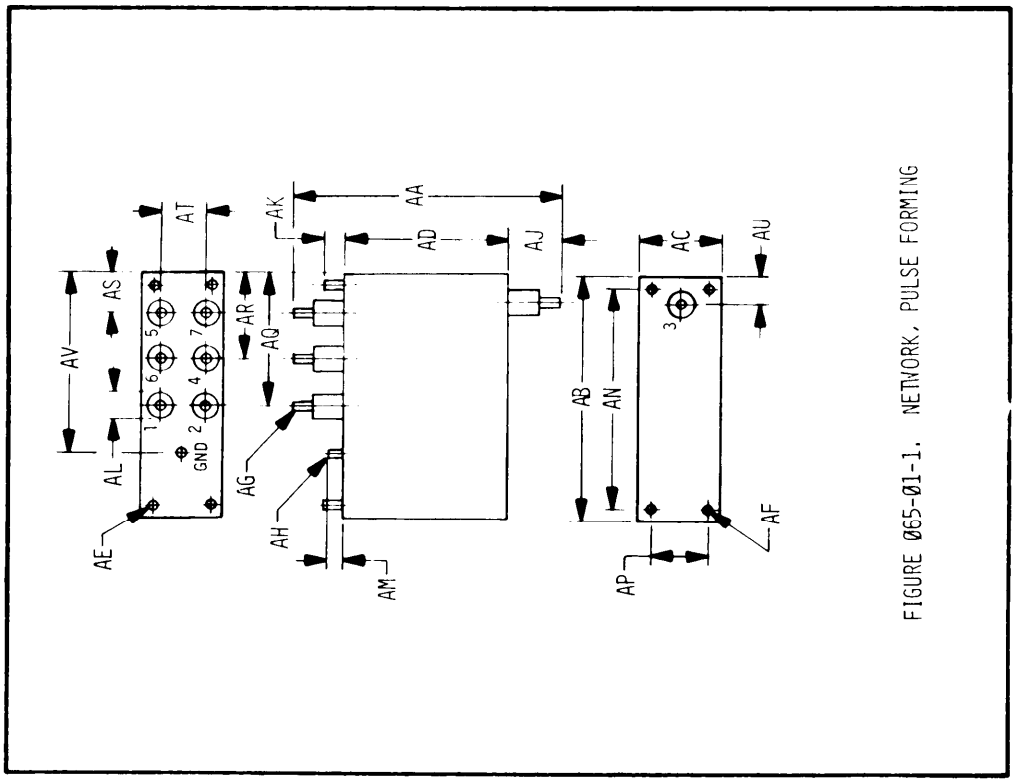


FIGURE Ø65-Ø1-1. NETWORK, PULSE FORMING

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

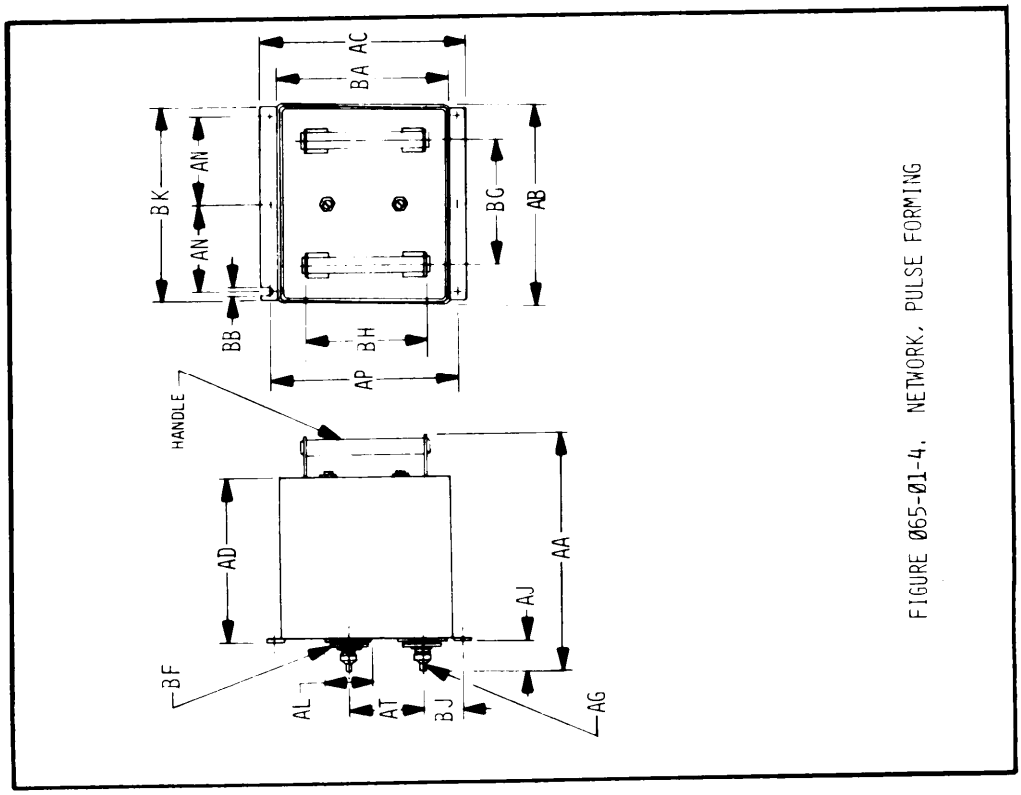


FIGURE 065-01-4. NETWORK, PULSE FORMING

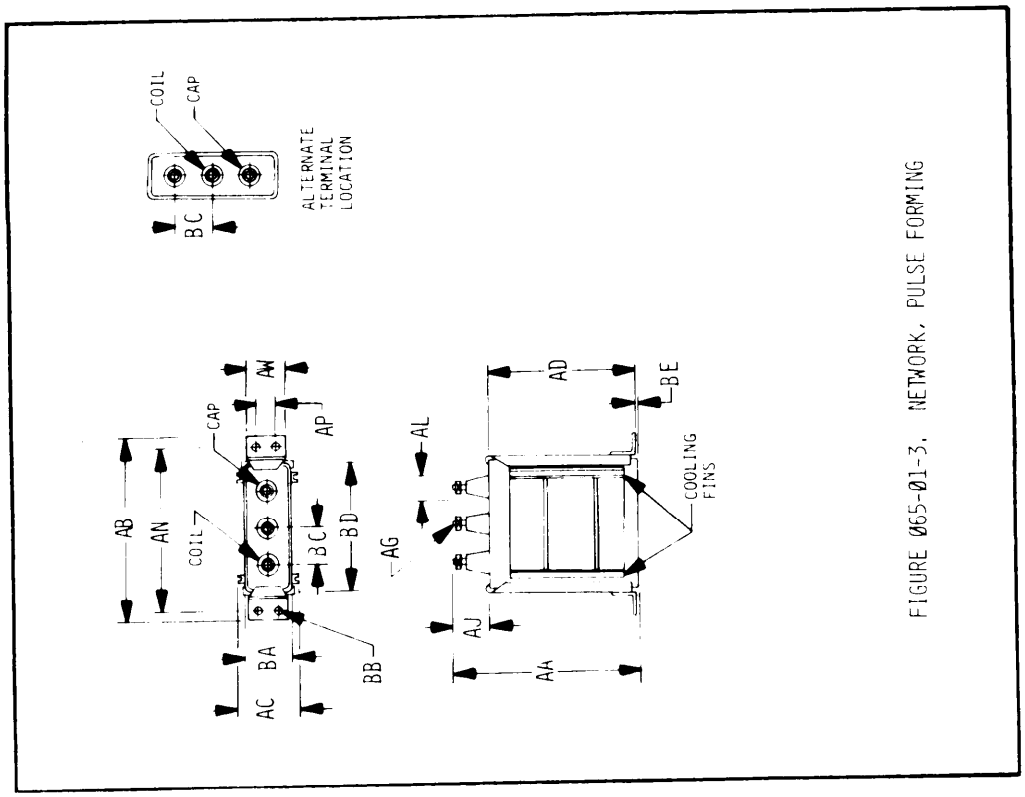


FIGURE 065-01-3. NETWORK, PULSE FORMING

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

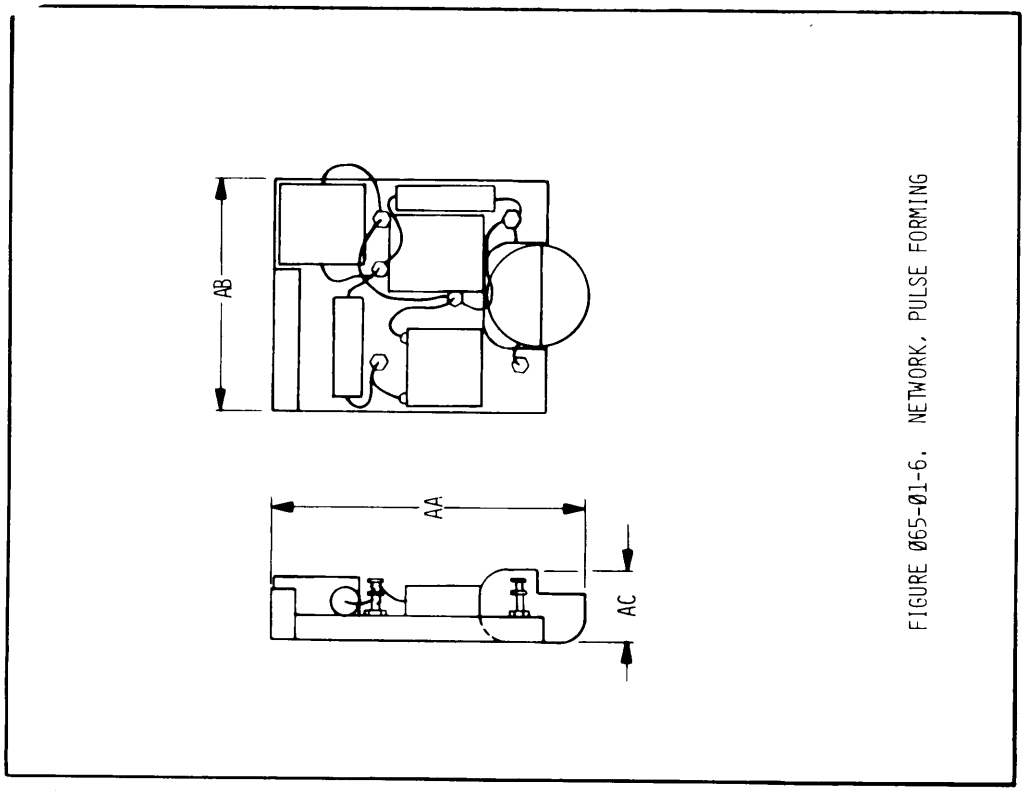


FIGURE Ø65-Ø1-6. NETWORK, PULSE FORMING

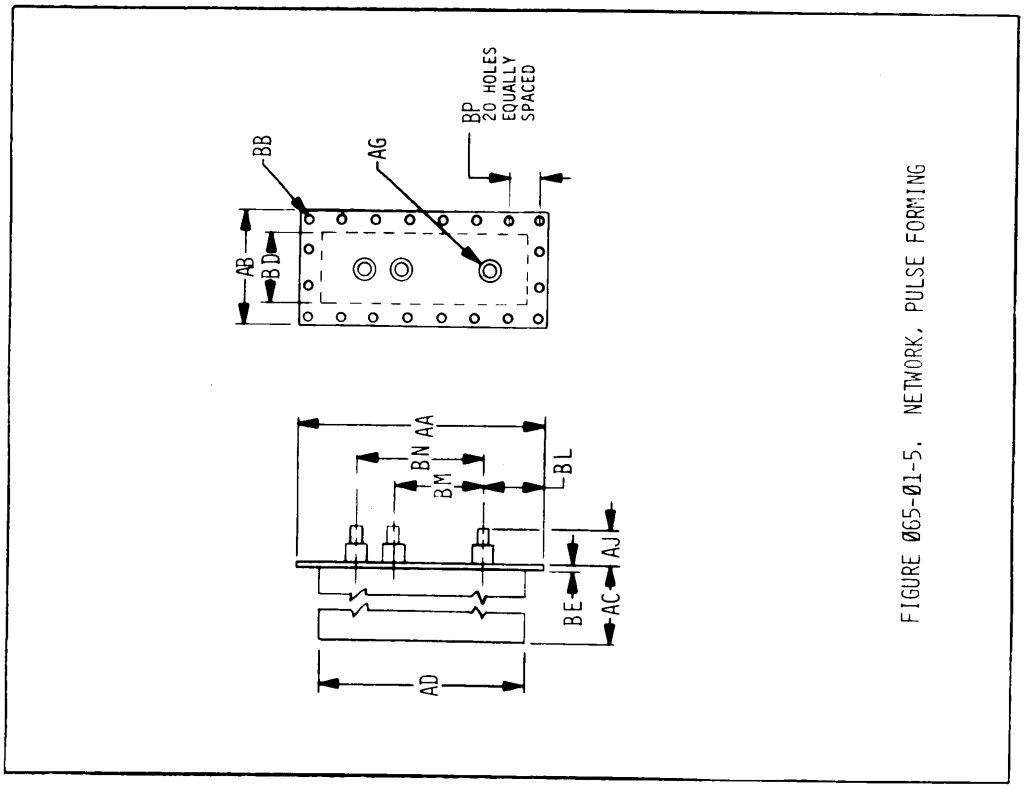


FIGURE Ø65-Ø1-5. NETWORK, PULSE FORMING

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

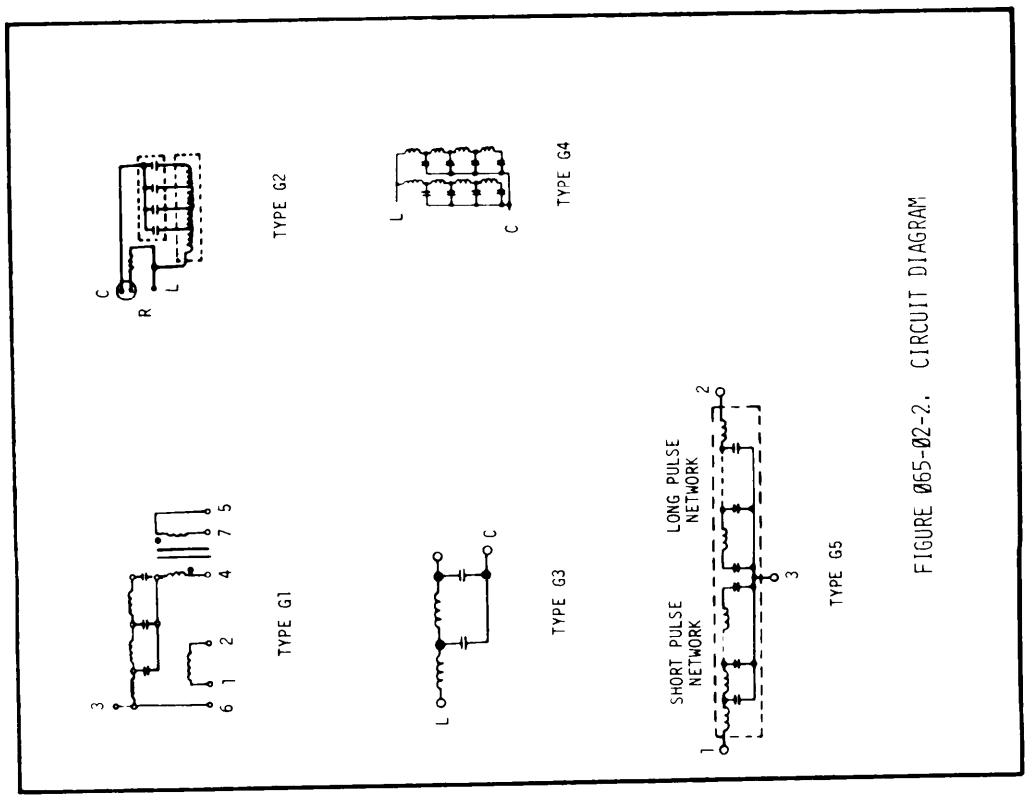


FIGURE Ø65-Ø2-2. CIRCUIT DIAGRAM

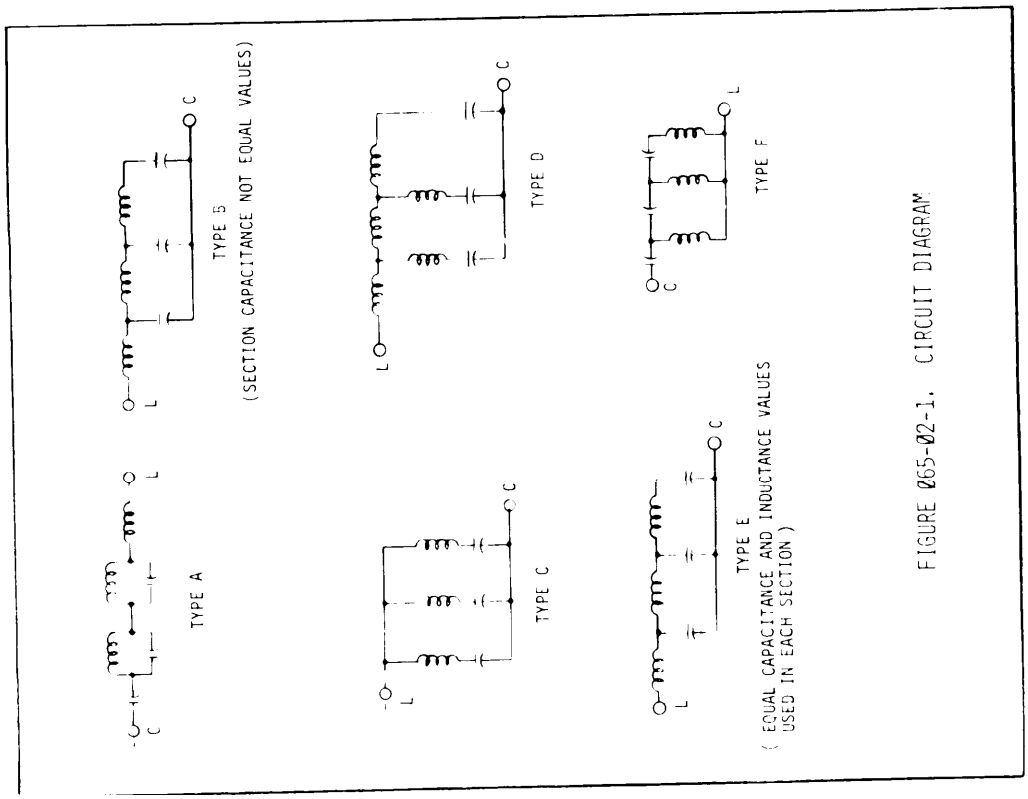


FIGURE Ø65-Ø2-1. CIRCUIT DIAGRAM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET

TITLE CODE (1 2 3 4 5 6) SERIAL NO. (7 8 9 10 11 12)

MICROFILM REQUIRED: YES. ☐ NO. ☐

REQUESTERS NAME _____

MAILING ADDRESS _____

REVISION TO AEDPS DOCUMENT NO.: ☐☐☐☐☐☐☐☐☐☐☐☐☐☐

PHONE NO. A/C _____

PULSE FORMING NETWORKS CHARACTERISTIC NAME	CHAR CODE 13	14	15	16
*DATE	1	Ø	Ø	3
*FSCM/CODE IDENT OF REQUESTOR	1	Ø	Ø	4
*PRIME CONTRACT NUMBER	1	Ø	Ø	5
*APPLICABLE GENERAL SPECIFICATION FROM SPECIFICATION TITLE INDEX	1	Ø	Ø	6
*ITEM APPLICATION	1	Ø	Ø	8
*DRAWING FIGURE NUMBER	1	Ø	Ø	9
*COMPLETE THE REQUIRED CODES FROM APPENDIX "A" AND OTHER APPENDICES AND CODES AS REQUIRED TO GENERATE THE DESIRED DOCUMENT	USE THE BLANK SRS			
*CIRCUIT DIAGRAM CONFIGURATION	1	5	7	Ø
*SOURCE (SELECT 6873 OR 6874 AND COMPLETE AT LEAST ONE LINE OF THE SOURCE TABLE)	USE BLANK SRS			
*FIRST ARTICLE INSPECTION - SELECT THE APPROPRIATE CODE				
*GROUP A INSPECTION - SELECT THE APPROPRIATE CODE				
*GROUP B - SELECT THE APPROPRIATE CODE				
*TEST METHOD - SELECT THE APPROPRIATE CODE				

V A L U E

20 25 30 35 40 45 50 55 60 65 70 75 80

157-158

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET

TITLE CODE (1 2 3 4 5 6) SERIAL NO. (7 8 9 10 11 12)

MICROFILM REQUIRED: YES. ☐ NO. ☐

REQUESTERS NAME _____

MAILING ADDRESS _____

REVISION TO AEDPS DOCUMENT NO.: ☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐

PHONE NO. A/C _____

CHARACTERISTIC NAME	CHAR CODE 13 14 15 16	VALUE 20 25 30 35 40 45 50 55 60 65 70 75 80

159-160

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Missile Command
ATTN: AMSMI- RCS
Redstone Arsenal, Alabama 35809

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO (If "yes", in what way?)

4. REMARKS (Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)

SUBMITTED BY (Printed or typed name and activity - Optional)

DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.