NOT MEASUREMENT SENSITIVE

MIL-STD-35-39A (MI)
30 JULY 1993
SUPERSEDING
MIL-STD-35-39 (MI)
18 JUNE 1974

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

BATTERIES

AMSC N/A

AREA EGDS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil - Downloaded: 2026102610707:242
Check the source to verify that this is the current version before use.

FOREWARD

1. This Military Standard is approved for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: AMSMI-RD-SE-TD, Redstone Arsenal, Alabama 35809, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

3. The purpose of MIL-STD-35-39A(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for Batteries.

4. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of MIL-STD-35.

5. It is important that the procedures described in the basic document (MIL-STD-35 and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of MIL-STD-35. This information is not repeated in each dash-numbered part book.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	APPLICABLE DOCUMENTS	4
	2.1	Government documents	4
	2.1.1	Specifications, Standards and Handbooks	4
	2.2	Non-Government publications	5
	2.3	Order of Precedence	5
	3.	DEFINITIONS	6
	4.	GENERAL REQUIREMENTS	7
	4.1	Introduction	7
	4.2	Specification Requirement Sheet (SRS)	7
	4.3	Configuration	7
	4.3.1	Dimensions	7
	4.3.2	Illustrations	7
	4.4	Units of Measure	7
	5.	DETAILED REQUIREMENTS	8
	5.1	Introduction	8
	5.2	MSE Formats	8
	5.3	Referenced Documents	8
	5.4	Tabulation	8
	5.5	Keyword Code Index (KCI) and Standard Paragraphs	8
	5.5.1	Interrelationship of Codes	9
	5.5.2	Automatic MSE Data	9
	5.5.3	MIL-STD-35 Table	9

TABLES

Table	I	Title Index	2

APPENDICES

Appendix	A.	Illustrations	72
	B.	Characteristic Code Index	75
		Index	78

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part book of the Automated Engineering Document Preparation System (AEDPS) provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for batteries.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered part books, have been included in the basic document (MIL-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part book, the following list contains additional subjects applicable to all AEDPS dash-numbered parts and included in MIL-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specification (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS.

1.4 Military Specification Exception Title Index. The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see Table I). Data bases have been established for the generation of MSEs for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index and entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under the base document. This list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference. When more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
BATTERY, CELLS	302001	MIL-C-83443	SILICON SOLAR CELLS
BATTERIES, DRY	302002	MIL-B-13136	GENERAL
		MIL-B-49030	GENERAL ALKALINE
		MIL-B-55252	ELECTROCHEMICAL CELLS
		MIL-B-55679	SPECIAL PURPOSE FOR HIGH RELIABILITY
BATTERIES,	302003	MIL-B-49458	NON-RECHARGE TYPE
BATTERIES, RECHARGEABLE	302004	MIL-B-55130	SEALED, NICKEL CADMIUM
BATTERY, SEA WATER	302005	MIL-B-82439	NAVY, GENERAL
BATTERY, SILVER ZINC ALKALI	302006	MIL-B-81502	GENERAL
BATTERY, HOLDER	302007	NAS-1464	T146 CELLS
BATTERIES, STORAGE	302008	MIL-B-11188	STARTING, LIGHTING AND IGNITION SERVICE
		MIL-B-23272	NICKEL-CADMIUM FOR MILITARY VEHICLES
		MIL-B-55118	MULTI-CELL BATTERIES FOR GROUND EQUIPMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
BATTERIES STORAGE (CONT)	302008	MIL-B-55363	VENTED, MULTICELL NICKEL-CADMIUM FOR GROUND EQUIPMENT
BATTERY, SINGLE CELL	302010	MIL-B-48761	PRIMARY RESERVE BATTERY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

MILITARY

MIL-B-18	Batteries, Non-rechargeable, Dry
MIL-R-26220	Batteries, Storage, Aircraft, Nickel-Cadmium, General
MIL-B-83769	Batteries, Storage, Lead-Acid, General

STANDARDS

MILITARY

MIL-STD-35	Automated Engineering Document Preparation System
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-202	Test Methods for Electronic and Electrical Components
MIL-STD-810	Environmental Test Methods and Engineering Guidelines
MIL-STD-1285	Marking of Electrical and Electronic Parts
MIL-STD-1860	Batteries, Non-Rechargeable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Bldg 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation.

ASTM E 380 Standard for Metric Practice

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Nongovernment standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of conflict between the text of this standard and the reference cited herein, the text of this standard shall take precedence.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in MIL-STD-35 are applicable to batteries.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for Batteries, it is necessary to use MIL-STD-35 in conjunction with this dash-numbered part book. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in MIL-STD-35 are applicable to Batteries.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions, described in MIL-STD-35, are applicable to Batteries.

4.3.2 Illustrations. Illustrations, applicable to batteries, are contained in Appendix A to this document.

4.4 Units of Measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTM E380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instruction for completion of the SRS and references for instructions on specific requirements contained in MIL-STD-35.

5.2 MSE Formats. AEDPS has the capability to prepare a six-section or a single section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in MIL-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format.

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Section 3, 4, and 5 in the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in MIL-STD-35.

5.4 Tabulation. Instructions for tabulation are provided in MIL-STD-35. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

5.5 Keyword code index (KCI) and standard paragraphs. The KCI provides codes to be entered on an SRS that are unique for the type part covered by this dash-numbered part book of MIL-STD-35. The left hand page presents the information in outline form using keywords and codes. The right hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part book. Find the keyword of the KCI and it~s associated code. Enter, on the SRS, the code and the characteristic value required. After the part~s unique characteristics have been specified, refer to MIL-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.5.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parenthesis, period, or underline. The standard paragraph, of which the code is a part, is shown adjacent to the code on the right hand page. When a characteristic value, entered with a code, becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact characteristic value entry, as supplied with the code, except for "X" entries.

5.5.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without making additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.5.3 MIL-STD-35 Tables. The KCI of this document contains reference to tables in MIL-STD-35. Refer to MIL-STD-35 for general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
REQUESTER`S NAME	0101
COMPANY NAME/COMMAND	0102
STREET/BUILDING	0103
CITY, STATE, ZIP	0104
PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
REQUESTER`S CAGE	1004
CONTRACT NUMBER/OFFICE SYMBOL	1005
BASE DOCUMENT	1006
SYSTEM APPLICATION	1008
GOVERNMENT DESIGN ACTIVITY CAGE	6369
FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT	0700
ONE SECTION DOCUMENT	0800
CONTROL (SELECT ONE)	
SOURCE	6873
SPECIFICATION	6874

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101
0102	0102
0103	0103
0104	0104
0105	0105
1004	USER(S) CAGE(S) 1004
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005
1006	BASE DOCUMENT. THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008
6369	GOVERNMENT DESIGN ACTIVITY CAGE 6369
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S) DESCRIBED.
6874	THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE SUGGESTED SOURCE(S) OF SUPPLY HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SOURCE TABLE	
NOTE: REFER TO TABLE V OF MIL-STD-35	
APERTURE CARDS REQUIRED	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942
DESIGN AND CONSTRUCTION	
RATED VOLTAGE (VOLTS DC)	1562
BATTERY CAPACITY (SELECT ONE)	
AMPERE-HOURS	1568
HOUR-RATE (HOURS)	1570

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0107	
0108	0108

SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.

PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.

PART NUMBER. THE PART NUMBER FOR THE ITEMS IS (THE SAME AS THE NUMBER OF THIS DOCUMENT). REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

6941 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.

6942 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

1562 THE RATED VOLTAGE OF THE BATTERY SHALL BE 1562 VOLTS DC.

1568 THE BATTERY CAPACITY SHALL BE 1568 AMPERE HOURS.

1570 THE BATTERY HOUR-RATE CAPACITY SHALL BE 1570 HOURS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
THE BATTERY SHALL BE (SELECT ONE)	
TYPE	1590
CLASS	1592
GRADE	1594
STYLE	1596
SIZE (DRY CELL ONLY)	1598
NUMBER OF CELLS	1612
ACTIVATION TIME (MINUTES) MAXIMUM	1614
ENERGY DENSITY (SELECT ONE)	
WATT-HOURS PER CUBIC INCH	1616
WATT-HOURS PER POUND	1618
CHARGE CONDITION FOR TRANSPORTATION (SELECT ONE)	
CHARGED AND DRY	1630
CHARGED AND WET	1632
DISCHARGED AND SHORT CIRCUITED	1634
SHORT CIRCUITED AND DUMPED	1636
SHELF LIFE (SELECT ONE)	
MONTHS	1664
YEARS	1666

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	DESIGN AND CONSTRUCTION.
1590	THE BATTERY SHALL BE TYPE 1590.
1592	THE BATTERY SHALL BE CLASS 1592.
1594	THE BATTERY SHALL BE GRADE 1594.
1596	THE BATTERY SHALL BE STYLE 1596.
1598	THE BATTERY, DRY CELL, SHALL BE SIZE 1598.
1612	THE NUMBER OF CELLS SHALL BE 1612.
1614	THE BATTERY ACTIVATION TIME SHALL BE NOT GREATER THAN 1614 MINUTES.
1616	THE BATTERY ENERGY DENSITY SHALL BE 1616 WATT HOURS/CUBIC INCHES.
1618	THE BATTERY ENERGY DENSITY SHALL BE 1618 WATT HOURS/POUND.
1630	THE CHARGE CONDITION FOR SHIPMENT SHALL BE CHARGED AND DRY.
1632	THE CHARGE CONDITION FOR SHIPMENT SHALL BE CHARGED AND WET.
1634	THE CHARGE CONDITION FOR SHIPMENT SHALL BE DISCHARGED AND SHORT CIRCUITED.
1636	THE CHARGE CONDITION FOR SHIPMENT SHALL BE SHORT CIRCUITED AND DUMPED.
1664	THE BATTERY SHELF LIFE SHALL BE 1664 MONTHS.
1666	THE BATTERY SHELF LIFE SHALL BE 1666 YEARS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
HEATING EQUIPMENT (SELECT ONE)	
REQUIRED	1680
NOT REQUIRED	1682
PORTABILITY METHOD (SELECT ONE)	
MOLDED HANDLES	1690
METAL HANDLES	1692
NONMETALLIC HANDLES	1694
CHARGE INDICATORS	
RATED CAPACITY (PERCENT)	
GREEN, WHITE, AND RED BALLS FLOATING	1714
WHITE AND RED BALLS FLOATING	1716
RED BALL FLOATING	1718

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	DESIGN AND CONSTRUCTION (CONT)
1680	BATTERY INTERNAL HEATING EQUIPMENT SHALL BE REQUIRED.
1682	BATTERY INTERNAL HEATING EQUIPMENT SHALL NOT BE REQUIRED.
1690	THE BATTERY SHALL HAVE INTEGRALLY MOLDED HANDLES.
1692	THE BATTERY SHALL HAVE METAL HANDLES.
1694	THE BATTERY SHALL HAVE NONMETALLIC HANDLES.
1714	THE REMAINING RATED CAPACITY WITH THE GREEN, WHITE, AND RED BALLS FLOATING SHALL BE 1714 PERCENT.
1716	THE REMAINING RATED CAPACITY WITH THE WHITE AND RED BALLS FLOATING SHALL BE 1716 PERCENT.
1718	THE REMAINING CAPACITY WITH THE RED BALL FLOATING SHALL BE 1718 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ALTITUDE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2322
AS FOLLOWS:	2323
NO LEAKAGE OF ELECTROLYTE	2324
ELECTRICAL LEAKAGE	
(OHMS) MINIMUM	2326
(MILLIAMPERES) MAXIMUM	2328
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2302
PER MIL-STD-810, METHOD 500 PROCEDURE _____	2306
TEMPERATURE (DEGREES C)	
MINIMUM	2308
*MAXIMUM	2310
TEST DURATION (HOURS)	2316

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2322	ALTITUDE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2322.
2323	ALTITUDE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2324	THERE SHALL BE NO LEAKAGE OF ELECTROLYTE.
2326	THE ELECTRICAL LEAKAGE SHALL BE NOT LESS THAN 2326 (OHMS).
2328	THE ELECTRICAL LEAKAGE SHALL BE NOT GREATER THAN 2328 MILLIAMPERES.
2302	ALTITUDE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH BASE DOCUMENT, EXCEPT 2302.
2306	ALTITUDE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-810, METHOD 500, PROCEDURE 2306.
2308 2310	THE TEST TEMPERATURE SHALL BE NOT LESS THAN 2308 DEGREES C AND NOT GREATER THAN 2310 DEGREES C.
2316	THE DURATION OF TEST SHALL BE 2316 HOURS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
BULGE RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2118
AS FOLLOWS:	2119
NO CRACKS, BLISTERS, OR VISIBLE DEFECTS	2120
SINGLE BULGE VALUE (INCHES) MAXIMUM	2122
TEST METHOD	
PER BASE DOCUMENT EXCEPT _____	2101
CAPACITY DISCHARGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1792
AS FOLLOWS:	
MINIMUM HOURS OF SERVICE BEFORE VOLTAGE FALLS BELOW TEST END VOLTAGE OR ELECTROLYTE LEAKAGE (HOURS)	1794
MINIMUM PRELIMINARY TEMPERATE DISCHARGE (HOURS)	1796
MINIMUM INITIAL TEMPERATE DISCHARGE (HOURS)	1798
MINIMUM DELAYED TEMPERATE DISCHARGE (HOURS)	1800

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2118	BULGE RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2118.
2119	BULGE RESISTANCE. THE REQUIREMENTS SHALL BE AS FOLLOWS:
2120	THERE SHALL BE NO CRACKS, BLISTERS, OR OTHER VISIBLE DEFECTS.
2122	SINGLE BULGE VALUE SHALL BE NOT GREATER THAN 2122 INCHES.
2101	BULGE RESISTANCE. TESTING SHALL BE ACCOMPLISHED IN ACCORDANCE WITH BASE DOCUMENT EXCEPT 2101.
1792	CAPACITY DISCHARGE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1792.
	CAPACITY DISCHARGE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1794	THE NUMBER OF HOURS OF SERVICE BEFORE BATTERY VOLTAGE FALLS BELOW TEST-END VOLTAGE OR BEFORE EVIDENCE OF ELECTROLYTE LEAKAGE SHALL BE NOT LESS THAN 1794 HOURS.
1796	THE HOURS OF SERVICE AT PRELIMINARY TEMPERATE DISCHARGE SHALL BE NOT LESS THAN 1796 HOURS.
1798	THE HOURS OF SERVICE AT INITIAL TEMPERATE DISCHARGE SHALL BE NOT LESS THAN 1798 HOURS.
1800	THE HOURS OF SERVICE AT DELAYED TEMPERATE DISCHARGE SHALL BE NOT LESS THAN 1800 HOURS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CAPACITY DISCHARGE (CONT)	
REQUIREMENTS (SELECT ONE)	
TEMPERATE DISCHARGE AFTER TROPICAL STORAGE (HOURS) MINIMUM	1802
PRELIMINARY ARCTIC DISCHARGE (HOURS) MINIMUM	1804
DELAYED ARCTIC DISCHARGE (HOURS) MINIMUM	1806
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1772
PER DOCUMENT (DOC DES)	1773
SHORT CIRCUIT TO CURRENT BUILDUP (MILLIAMPERES)	1778
CLOSED CIRCUIT VOLTAGE	
REQUIREMENTS (SELECT ONE IF REQUIRED)	
REQUIREMENTS PER BASE DOCUMENT EXCEPT _____	1760
AS FOLLOWS:	1762
VOLTS PER CELL	
MINIMUM VOLTS	1763
*MAXIMUM (VOLTS)	1764
BATTERY VOLTAGE	
MINIMUM VOLTS	1766
*MAXIMUM (VOLTS)	1767

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1802	THE HOURS OF SERVICE AT TEMPERATE DISCHARGE AFTER TROPICAL STORAGE SHALL BE NOT LESS THAN 1802 HOURS.
1804	THE HOURS OF SERVICE AT PRELIMINARY ARCTIC DISCHARGE SHALL BE NOT LESS THAN 1804 HOURS.
1806	THE HOURS OF SERVICE AT DELAYED ARCTIC DISCHARGE SHALL BE NOT LESS THAN 1806 HOURS.
1772	CAPACITY DISCHARGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1772.
1773	CAPACITY DISCHARGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1773.
1778	THE BATTERY SHALL BE SHORT CIRCUITED UNTIL A BUILDUP OF CURRENT TO 1778 MILLIAMPERES OCCURS.
1760	CLOSED CIRCUIT VOLTAGE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1760.
1762	CLOSED CIRCUIT VOLTAGE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1763 1764	THE VOLTAGE PER CELL SHALL BE NOT LESS THAN 1763 VOLTS AND NOT GREATER THAN 1764 VOLTS.
1766 1767	THE BATTERY VOLTAGE SHALL BE NOT LESS THAN 1766 VOLTS AND NOT GREATER THAN 1767 VOLTS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLOSED CIRCUIT VOLTAGE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1752
ELECTRICAL LOAD (OHMS)	1756
DROP TEST	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2164
AS FOLLOWS:	2166
NO REDUCTION IN SPECIFIED CAPACITY	2167
OPEN CIRCUIT VOLTAGE (VOLTS) NOMINAL	2168
CLOSED CIRCUIT VOLTAGE (VOLTS) NOMINAL	2170
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2152
AS FOLLOWS:	
ARRESTMENTS (MAXIMUM)	2156
FREE FALL (FEET) NOMINAL	2158

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1752	CLOSED CIRCUIT VOLTAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1752.
1756	CLOSED CIRCUIT VOLTAGE. THE ELECTRICAL LOAD SHALL BE 1756 OHMS.
2164	DROP TEST. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH BASE DOCUMENT, EXCEPT 2164.
2166	DROP TEST. THE REQUIREMENTS SHALL BE AS FOLLOWS:
2167	THERE SHALL BE NO REDUCTION IN THE SPECIFIED CAPACITY OF THE BATTERY.
2168	THE OPEN CIRCUIT VOLTAGE SHALL BE 2168 VOLTS.
2170	THE CLOSED CIRCUIT VOLTAGE SHALL BE 2170 VOLTS.
2152	DROP TEST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2152.
	DROP TEST. TESTING SHALL BE AS FOLLOWS:
2156	THE NUMBER OF ARRESTMENTS SHALL BE NOT GREATER THAN 2156.
2158	THE NOMINAL HEIGHT OF THE FREE FALL SHALL BE 2158 FEET.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELECTRICAL BREAKDOWN OF CONTAINERS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2002
THE CONTAINER SHALL BE FREE OF IMPERFECTIONS.	2004
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1988
PER MIL-B-82117.	1990
VOLTAGE PER MIL OF THICKNESS (VOLTS)	1992
MAXIMUM (RMS VOLTS)	1994
DURATION OF VOLTAGE APPLICATION (SECONDS)	1996
ELECTROLYTE LEAKAGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2024
NO EVIDENCE OF ELECTROLYTE LEAKAGE.	2026
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2012
PER DOCUMENT (DOC DES)	2013

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2002	ELECTRICAL BREAKDOWN FOR CONTAINERS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2002.
2004	ELECTRICAL BREAKDOWN FOR CONTAINERS. THE CONTAINER SHALL BE FREE OF LEAKS AND OTHER IMPERFECTIONS, AND SHALL SHOW NO EVIDENCE OF BEING PERFORATED OR BURNED THROUGH.
1988	ELECTRICAL BREAKDOWN FOR CONTAINERS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1988.
1990	ELECTRICAL BREAKDOWN FOR CONTAINERS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-B-82117.
1992	THE VOLTAGE PER MIL OF THICKNESS SHALL BE 1992 VOLTS.
1994	THE VOLTAGE SHALL BE NOT GREATER THAN 1994 VOLTS RMS.
1996	THE DURATION OF VOLTAGE APPLICATION SHALL BE 1996 SECONDS.
2024	ELECTROLYTE LEAKAGE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2024.
2026	ELECTROLYTE LEAKAGE. THERE SHALL BE NO EVIDENCE OF ELECTROLYTE LEAKAGE.
2012	ELECTROLYTE LEAKAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2012.
2013	ELECTROLYTE LEAKAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2013.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
EXPLOSIVE ATMOSPHERE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2238
THERE SHALL BE NO EXPLOSION.	2240
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2232
PER MIL-B-26220.	2234
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4762
NO EVIDENCE OF FUNGUS GROWTH.	4763
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT _____	4754
PER MIL-STD-810, METHOD 508.	4755
TEST PERIOD SHALL BE (DAYS)	4756

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2238	EXPLOSIVE ATMOSPHERE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2238.
2240	EXPLOSIVE ATMOSPHERE. THERE SHALL BE NO EXPLOSION.
2232	EXPLOSIVE ATMOSPHERE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2232.
2234	EXPLOSIVE ATMOSPHERE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-B-26220.
4762	FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4762.
4763	FUNGUS. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH.
4754	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.
4755	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.
4756	THE TEST PERIOD SHALL BE 4756 DAY(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HEATER ENDURANCE (INTERNALLY HEATED BATTERIES)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2772
AS FOLLOWS:	2774
NO VISIBLE DAMAGE.	2775
NO EXCESSIVE LEAKAGE, ARCING OR BREAKDOWN.	2776
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2752
PER MIL-B-26220.	2754
TEST DURATION (HOURS)	2756
FIRST TEST:	2757
VOLTAGE (VOLTS RMS)	2758
FREQUENCY (HERTZ)	2760
DURATION (SECONDS)	2762

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2772	HEATER ENDURANCE (INTERNALLY HEATED BATTERIES). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2772.
2774	HEATER ENDURANCE (INTERNALLY HEATED BATTERIES). THE REQUIREMENT(S) SHALL BE AS FOLLOWS.
2775	THERE SHALL BE NO DETERIORATION OR DAMAGE TO THE HEATER.
2776	THERE SHALL BE NO EXCESSIVE LEAKAGE, ARCING, OR BREAKDOWN.
2752	HEATER ENDURANCE (INTERNALLY HEATED BATTERIES). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2752.
2754	HEATER ENDURANCE (INTERNALLY HEATED BATTERIES). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-B-26220.
2756	THE DURATION OF THE ENTIRE TEST SHALL BE 2756 HOURS.
2757	FIRST TEST:
2758	THE TEST VOLTAGE SHALL BE 2758 VOLTS RMS.
2760	THE TEST FREQUENCY SHALL BE 2760 HERTZ.
2762	THE DURATION OF THE APPLIED VOLTAGE SHALL BE 2762 SECONDS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HEATER ENDURANCE (INTERNALLY HEATED BATTERIES) (CONT)	
TEST METHODS (CONT)	
TEST DURATION (HOURS) (CONT)	
SECOND TEST:	2763
VOLTAGE (RMS)	2764
FREQUENCY (HERTZ)	2766
DURATION (SECONDS)	2768
HEATER PERFORMANCE (INTERNALLY HEATED BATTERIES)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2732
AS FOLLOWS:	2734
HEATER HOT SPOT TEMPERATURE, MAXIMUM (DEGREES C)	2735
CELL LINK STABILIZATION TEMPERATURE MINIMUM (DEGREES C)	2736
*MAXIMUM (DEGREES C)	2737
MAXIMUM CELL LINK TEMPERATURE, DIFFERENCE (DEGREES C)	2740

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2763	SECOND TEST:
2764	THE TEST VOLTAGE SHALL BE 2764 VOLTS RMS.
2766	THE TEST FREQUENCY SHALL BE 2766 HERTZ.
2768	THE DURATION OF THE APPLIED VOLTAGE SHALL BE 2768 SECONDS.
2732	HEATER PERFORMANCE (INTERNALLY HEATED BATTERIES). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2732.
2734	HEATER PERFORMANCE (INTERNALLY HEATED BATTERIES). THE REQUIREMENTS SHALL BE AS FOLLOWS:
2735	THE HEATER HOT SPOT TEMPERATURE SHALL BE NOT GREATER THAN 2735 DEGREES C.
2736 2737	THE CELL LINK STABILIZATION TEMPERATURE SHALL BE NOT LESS THAN 2736 DEGREES C AND NOT GREATER THAN 2737 DEGREES C.
2740	THE DIFFERENCE BETWEEN CELL LINK TEMPERATURES SHALL BE NOT GREATER THAN 2740 DEGREES C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HEATER PERFORMANCE (INTERNALLY HEATED BATTERIES) (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2712
PER MIL-B-26220.	2714
STABILIZATION TEMPERATURE (DEGREES C)	2716
HEATING PERIOD (MINUTES)	2718
HIGH FREQUENCY VIBRATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1454
AS FOLLOWS:	1451
NO SHARP FLUCTUATION OF VOLTAGE.	1457
NO MECHANICAL FAILURE AFTER TEST.	1461
NO ELECTROLYTE LEAKAGE.	1463
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1465
PER MIL-STD-202, METHOD 204.	1449
TEST CONDITION (LETTER)	1469
NORMAL MOUNTING METHOD.	1471

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2712	HEATER PERFORMANCE (INTERNALLY HEATED BATTERIES). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2712.
2714	HEATER PERFORMANCE (INTERNALLY HEATED BATTERIES). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-B-26220.
2716	THE BATTERY STABILIZATION TEMPERATURE SHALL BE 2716 DEGREES C.
2718	THE BATTERY HEATING PERIOD SHALL BE 2718 MINUTES.
1454	HIGH FREQUENCY VIBRATION. THE REQUIREMENTS SHALL BE IN ACCORDANCE WITH BASE DOCUMENT EXCEPT 1454.
1451	HIGH FREQUENCY VIBRATION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1457	THERE SHALL BE NO SHARP FLUCTUATION OF VOLTAGE DURING TEST.
1461	THERE SHALL BE NO MECHANICAL FAILURE AFTER TEST.
1463	THERE SHALL BE NO ELECTROLYTE LEAKAGE AFTER TEST.
1465	HIGH FREQUENCY VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT EXCEPT 1465.
1449	HIGH FREQUENCY VIBRATION. TESTING SHALL BE PERFORMED PER MIL-STD-202, METHOD 204.
1469	TEST CONDITIONS LETTER 1469 SHALL APPLY.
1471	NORMAL MOUNTING METHOD SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HYDROGEN EVOLUTION (GASSING)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2498
AS FOLLOWS:	2500
INITIAL VOLUME	
MAXIMUM VALUE (CUBIC CENTIMETERS)	2501
MAXIMUM VALUE, END OF SIXTH SERVICE (CUBIC CENTIMETERS)	2502
MAXIMUM VALUE, END OF TWELFTH SERVICE (CUBIC CENTIMETERS)	2504
TEST METHOD	
PER BASE DOCUMENT EXCEPT _____	2492
IMMERSION (LEAKAGE)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4817
NO LEAKAGE.	4818

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2498	HYDROGEN EVOLUTION (GASSING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2498.
2500	HYDROGEN EVOLUTION (GASSING). THE REQUIREMENTS SHALL BE AS FOLLOWS:
2501	THE HYDROGEN EVOLUTION INITIALLY SHALL BE NOT GREATER THAN 2501 CUBIC CENTIMETERS.
2502	THE HYDROGEN EVOLUTION AT THE END OF THE SIXTH SERVICE ROUTINE SHALL BE NOT GREATER THAN 2502 CUBIC CENTIMETERS.
2504	THE HYDROGEN EVOLUTION AT THE END OF THE TWELFTH SERVICE ROUTINE SHALL BE NOT GREATER THAN 2504 CUBIC CENTIMETERS.
2492	HYDROGEN EVOLUTION (GASSING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2492.
4817	IMMERSION (LEAKAGE). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4817.
4818	IMMERSION (LEAKAGE). THERE SHALL BE NO LEAKAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMMERSION (LEAKAGE) (CONT)	
TEST METHOD (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4809
PER MIL-B-82117.	4810
PER MIL-STD-202, METHOD 104, TEST CONDITION (LETTER)	4811
FINAL MEASUREMENT(S) AFTER FINAL CYCLE (HOURS)	4812
IMPACT RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2146
IMPACT RESISTANCE (INCH-POUNDS) MINIMUM	2148
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2132
AS FOLLOWS:	
SPECIMEN THICKNESS (INCHES) NOMINAL	2136
DROP HEIGHT (INCHES) NOMINAL	2138
SPECIMENS (NUMBER)	2140

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4809	IMMERSION (LEAKAGE). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4809.
4810	IMMERSION (LEAKAGE). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-B-82117.
4811	IMMERSION (LEAKAGE). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-202, METHOD 104, TEST CONDITION LETTER 4811 SHALL APPLY.
4812	FINAL MEASUREMENT(S) SHALL BE MADE WITHIN 4812 HOUR(S) AFTER THE FINAL CYCLE.
2146	IMPACT RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2146.
2148	IMPACT RESISTANCE. THE AVERAGE IMPACT RESISTANCE OF THE BATTERY CONTAINERS SHALL BE NOT LESS THAN 2148 INCH-POUNDS.
2132	IMPACT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2132
	IMPACT RESISTANCE. TESTING SHALL BE PERFORMED AS FOLLOWS:
2136	THE TEST SPECIMEN THICKNESS SHALL BE 2136 INCHES, NOMINAL.
2138	THE HEIGHT OF THE DROP SHALL BE 2138 INCHES, NOMINAL.
2140	THERE SHALL BE 2140 SPECIMEN(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE	
REQUIREMENTS	
PER BASE DOCUMENT EXCEPT _____	1379
TEST METHODS	
PER BASE DOCUMENT EXCEPT _____	1371
INTERNAL AIR PRESSURE	
REQUIREMENTS	
PER BASE DOCUMENT EXCEPT _____	2226
NO LOSS OF PRESSURE (SECONDS)	2228
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2212
PER MIL-B-83769.	2214
PRESSURE (PSI) NOMINAL	2216
DURATION (MINUTES) NOMINAL	2218
TEST TEMPERATURE	2220
MINIMUM (DEGREES C)	2221
*MAXIMUM (DEGREES C)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1379	INSULATION RESISTANCE. THE REQUIREMENTS SHALL BE IN ACCORDANCE WITH BASE DOCUMENT, EXCEPT 1379.
1371	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH BASE DOCUMENT, EXCEPT 1371.
2226	INTERNAL AIR PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2226.
2228	INTERNAL AIR PRESSURE. THERE SHALL BE NO LOSS OF PRESSURE FOR A MINIMUM OF 2228 SECONDS.
2212	INTERNAL AIR PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2212.
2214	INTERNAL AIR PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-B-83769.
2216	THE NOMINAL TEST PRESSURE SHALL BE 2216 POUNDS PER SQUARE INCH.
2218	THE NOMINAL TEST DURATION SHALL BE 2218 MINUTES.
2220 2221	THE TEST TEMPERATURE SHALL BE NOT LESS THAN 2220 DEGREES C AND NOT GREATER THAN 2221 DEGREES C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INVERSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2702
NO EVIDENCE OF ELECTROLYTE LEAKAGE.	2704
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2652
AS FOLLOWS:	
FIRST VIBRATION CYCLE AMPLITUDE (INCHES)	2660
FIRST VIBRATION TOLERANCE + (INCHES)	2662
FIRST VIBRATION TOLERANCE - (INCHES)	2664
TEST DURATION (MINUTES)	2666
TEST TEMPERATURE (DEGREES C)	2668
INTERNAL DRY INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1978
TERMINAL CELL RESISTANCE MINIMUM (OHMS)	1980
TEST METHODS	
PER BASE DOCUMENT EXCEPT _____	1973

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2702	INVERSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2702.
2704	INVERSION. THERE SHALL BE NO EVIDENCE OF ELECTROLYTE LEAKAGE.
2652	INVERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2652.
	INVERSION. TESTING SHALL BE AS FOLLOWS:
2660	FIRST VIBRATION CYCLE AMPLITUDE SHALL BE 2660 INCHES.
2662	THE TOLERANCE SHALL BE + 2662 INCHES.
2664	THE TOLERANCE SHALL BE - 2664 INCHES.
2666	THE TEST DURATION SHALL BE 2666 MINUTES.
2668	THE TEST TEMPERATURE SHALL BE 2668 DEGREES C.
1978	INTERNAL DRY INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1978.
1980	INTERNAL DRY INSULATION RESISTANCE. THE TERMINAL TO TERMINAL INTERNAL RESISTANCE OF EACH CELL SHALL BE NOT LESS THAN 1980 OHMS.
1973	INTERNAL DRY INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH BASE DOCUMENT, EXCEPT 1973.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LIFE CYCLE CAPACITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1962
MINIMUM LIFE CYCLES WITHOUT PERFORMANCE IMPACT (NUMBER)	1964
TEST METHOD (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1942
CYCLES (NUMBER)	1946
LOW FREQUENCY VIBRATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1473
AS FOLLOWS:	1525
NO MECHANICAL DAMAGE.	1477
NO ELECTROLYTE LEAKAGE.	1479
CAPACITY (AMPERE-HOURS) MINIMUM	1481
OPEN CIRCUIT VOLTAGE (VOLTS) NOMINAL	1483
CLOSED CIRCUIT VOLTAGE (VOLTS) NOMINAL	1485

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1962	LIFE CYCLE CAPACITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1962.
1964	LIFE CYCLE CAPACITY. THE BATTERY SHALL COMPLETE NOT LESS THAN 1964 LIFE CYCLES WITH NO DEGRADATION OF PERFORMANCE.
1942	LIFE CYCLE CAPACITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1942.
1946	LIFE CYCLE CAPACITY. THE NUMBER OF CYCLES SHALL BE 1946.
1473	LOW FREQUENCY VIBRATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1473.
1525	LOW FREQUENCY VIBRATION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1477	THERE SHALL BE NO MECHANICAL DAMAGE.
1479	THERE SHALL BE NO ELECTROLYTE LEAKAGE.
1481	THE MINIMUM CAPACITY SHALL BE 1481 AMPERE-HOURS.
1483	THE NOMINAL OPEN CIRCUIT VOLTAGE SHALL BE 1483 VOLTS.
1485	THE NOMINAL CLOSED CIRCUIT VOLTAGE SHALL BE 1485 VOLTS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LOW FREQUENCY VIBRATION (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1487
PER MIL-STD-202, METHOD 201.	1468
DURATION (HOURS)	1489
DIRECTION OF MOTION (SELECT ONE)	
ON CENTERLINE OF MOST SENSITIVE AXIS.	1491
PERPENDICULAR TO CENTERLINE OF MOST SENSITIVE AXIS.	1493
NORMAL MOUNTING METHOD	1497
DISCHARGE AT:	
CURRENT (AMPERES)	1499
DURATION (HOURS)	1502
MAGNETIC EFFECT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2534
AS FOLLOWS:	2536
FLUX DENSITY CHANGE, MAXIMUM (MILLIGAUSS)	2537
FLUX DENSITY CHANGE AFTER IDEALIZATION (MILLIGAUSS)	2538

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1487	LOW FREQUENCY VIBRATION. THE TEST SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT EXCEPT 1487.
1468	LOW FREQUENCY VIBRATION. THE TEST SHALL BE PER MIL-STD-202, METHOD 201.
1489	THE DURATION OF APPLICATION PER AXIS SHALL BE 1489 (HOURS).
1491	THE DIRECTION OF MOTION SHALL BE ON THE CENTERLINE OF MOST SENSITIVE AXIS.
1493	THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO CENTERLINE OF MOST SENSITIVE AXIS.
1497	THE NORMAL MOUNTING METHOD SHALL BE UTILIZED.
1499	THE BATTERY SHALL BE DISCHARGED AT 1499 AMPERES.
1501	THE BATTERY DISCHARGE DURATION SHALL BE 1501 HOURS.
2534	MAGNETIC EFFECT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2534.
2536	MAGNETIC EFFECT. THE REQUIREMENTS SHALL BE AS FOLLOWS:
2537	THE CHANGE IN FLUX DENSITY SHALL BE NOT GREATER THAN 2537 MILLIGAUSS.
2538	THE CHANGE IN FLUX DENSITY AFTER IDEALIZATION SHALL BE NOT GREATER THAN 2538 MILLIGAUSS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAGNETIC EFFECT (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2512
PER MIL-B-18.	2514
MAGNETIC FIELD (MILLIGAUSS)	2516
RESISTIVE LOAD (OHMS)	2518
MAGNETIC FIELD AFTER IDEALIZATION (GAUSS)	2520
POSITIVE PULSE, FIRST CYCLE (GAUSS)	2522
PULSE AMPLITUDE, REDUCTION (GAUSS)	2528
MECHANICAL SHOCK	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2198
PER MIL-B-82117.	2200
PER MIL-B-18.	2202
AS FOLLOWS:	2201
NO DISCONTINUITY OF SERVICE.	2204
NO MECHANICAL DAMAGE.	2206

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2512	MAGNETIC EFFECT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2512.
2514	MAGNETIC EFFECT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-B-18.
2516	THE MAGNETIC FIELD SHALL BE 2516 MILLIGAUSS.
2518	THE RESISTIVE LOAD SHALL BE 2518 OHMS.
2520	THE MAGNETIC FIELD AFTER IDEALIZATION SHALL BE 2520 GAUSS.
2522	THE FIRST CYCLE POSITIVE PULSE SHALL BE 2522 GAUSS.
2528	THE REDUCTION OF PULSE AMPLITUDE BETWEEN EACH SUCCESSIVE CYCLE SHALL BE 2528 GAUSS.
2198	MECHANICAL SHOCK. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH BASE DOCUMENT, EXCEPT 2198.
2200	MECHANICAL SHOCK. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH MIL-B-82117.
2202	MECHANICAL SHOCK. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH MIL-B-18.
2201	MECHANICAL SHOCK. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2204	THERE SHALL BE NO DISCONTINUITY OF SERVICE.
2206	THERE SHALL BE NO MECHANICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MECHANICAL SHOCK (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2181
PER MIL-STD-810, METHOD 516.	2183
PER MIL-B-82117.	2189
PER MIL-B-18.	2191
OVERCHARGE CYCLE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1898
MINIMUM OVERCHARGE CYCLES (NUMBER)	1900
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1882
OVERCHARGE CYCLE PER TEST (NUMBER)	1884
POTASSIUM CARBONATE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2608
POTASSIUM CARBONATE, MAXIMUM (GRAMS PER LITER)	2610

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2181	MECHANICAL SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH BASE DOCUMENT EXCEPT 2181.
2183	MECHANICAL SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-810, METHOD 516.
2189	MECHANICAL SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-B-82117.
2191	MECHANICAL SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-B-18.
1898	OVERCHARGE CYCLE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1898.
1900	OVERCHARGE CYCLE. THE BATTERY SHALL COMPLETE NOT LESS THAN 1900 OVERCHARGE CYCLES.
1882	OVERCHARGE CYCLE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1882.
1884	OVERCHARGE CYCLE. THE BATTERY SHALL COMPLETE 1884 CYCLES PER TEST.
2608	POTASSIUM CARBONATE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2608.
2610	POTASSIUM CARBONATE. THE POTASSIUM CARBONATE SHALL BE NOT GREATER THAN 2610 GRAMS PER LITER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
POTASSIUM CARBONATE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2602
PER MIL-B-55118.	2604
RAIN	
REQUIREMENT (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2368
SHALL SHOW NO VISIBLE DAMAGE OR HARDNESS CHANGE.	2370
TEST METHOD (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2362
PER MIL-STD-810, METHOD 506, PROCDURE _____	2364
RANDOM VIBRATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1444
NO FORM, FIT OR FUNCTION DAMAGE.	1445

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2602	POTASSIUM CARBONATE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2602.
2604	POTASSIUM CARBONATE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-B-55118.
2368	RAIN. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2368.
2370	RAIN. THE BATTERY CASE SHALL NOT CRACK, CRAZE, SAG, BLISTER, OR SHOW ANY APPRECIABLE CHANGE IN HARDNESS.
2362	RAIN. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2362.
2364	RAIN. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-810, METHOD 506, PROCEDURE 2364.
1444	RANDOM VIBRATION. THE REQUIREMENTS SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT EXCEPT 1444.
1445	RANDOM VIBRATION. THERE SHALL BE NO DAMAGE THAT AFFECTS FORM, FIT, OR FUNCTION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RANDOM VIBRATION (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1426
PER MIL-STD-202, METHOD 214 TEST CONDITION (LETTER AND NUMBER)	1427
RETENTION OF CHARGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1912
MINIMUM DELIVERED (AMPERES-HOURS)	1914
TEST METHOD	
PER BASE DOCUMENT EXCEPT _____	1904
SALT SPRAY	
REQUIREMENTS	
PER BASE DOCUMENT EXCEPT _____	4785
TEST METHODS	
PER BASE DOCUMENT EXCEPT _____	4789

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1426	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1426.
1427	RANDOM VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-202, METHOD 214, TEST CONDITION 1427.
1912	RETENTION OF CHARGE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1912.
1914	RETENTION OF CHARGE. THE BATTERY SHALL DELIVER NOT LESS THAN 1914 AMPERE-HOURS.
1904	RETENTION OF CHARGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT EXCEPT 1904.
4785	SALT SPRAY. THE REQUIREMENT(S)(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT EXCEPT 4785.
4789	SALT SPRAY. THE TEST SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4789.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEALING COMPOUND TEST	
REQUIREMENT (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2074
AS FOLLOWS:	2076
NO FLOW OF SEALING COMPOUND.	2077
NO CRACKING OR SEPARATION OF COMPOUND.	2078
NO DECREASE IN INTERNAL PRESSURE.	2080
TEST METHOD (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2032
AS FOLLOWS:	
TEMPERATURE	
HIGH TEMPERATURE	2036
MINIMUM (DEGREES C)	2037
*MAXIMUM (DEGREES C)	
LOW TEMPERATURE	2040
MINIMUM (DEGREES C)	2041
*MAXIMUM (DEGREES C)	
HIGH TEMPERATURE TEST DURATION (HOURS)	2044
LOW TEMPERATURE TEST DURATION (HOURS)	2046
INTERNAL AIR PRESSURE (PSI) NOMINAL	2058
PRESSURE DURATION (SECONDS) NOMINAL	2060

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2074	SEALING COMPOUND TEST. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2074.
2076	SEALING COMPOUND TEST. THE REQUIREMENTS SHALL BE AS FOLLOWS:
2077	THERE SHALL BE NO FLOW OF SEALING COMPOUND AT ELEVATED TEMPERATURE.
2078	THERE SHALL BE NO CRACKING OR SEPARATION OF COMPOUND AT LOWERED TEMPERATURE.
2080	THERE SHALL BE NO DECREASE IN INTERNAL PRESSURE.
2032	SEALING COMPOUND TEST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2032.
	SEALING COMPOUND TEST. TESTING SHALL BE AS FOLLOWS:
2036 2037	THE HIGH TEMPERATURE FOR THE TEST SHALL BE NOT LESS THAN 2036 DEGREES C AND NOT GREATER THAN 2037 DEGREES C.
2040 2041	THE LOW TEMPERATURE FOR THE TEST SHALL BE NOT LESS THAN 2040 DEGREES C AND NOT GREATER THAN 2041 DEGREES C.
2044	THE TEST DURATION AT HIGH TEMPERATURE SHALL BE 2044 HOURS.
2046	THE TEST DURATION AT LOW TEMPERATURE SHALL BE 2046 HOURS.
2058	THE INTERNAL AIR PRESSURE SHALL BE 2058 POUNDS PER SQUARE INCH, NOMINAL.
2060	THE PRESSURE DURATION SHALL BE 2060 SECONDS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEALING COMPOUND TEST (CONT)	
TEST METHOD (CONT)	
VIBRATION CYCLES (PER MINUTE)	2062
VERTICAL DISPLACEMENT (INCHES)	2066
DURATION (HOURS) NOMINAL	2070
SHOCK (HIGH IMPACT)	
REQUIREMENT (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1503
AS FOLLOWS:	1507
CONSTANT CURRENT (HOUR RATE)	1505
CLOSED CIRCUIT VOLTAGE AT MEASUREMENT INTERVALS (MINUTE)	1513
DISCHARGE TO TEST END (VOLTAGE PER CELL)	1515
NO FORM, FIT, OR FUNCTION DAMAGE.	1517
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1519
PER MIL-STD-202, METHOD 207.	1527
UTILIZE ANY SUITABLE MOUNTING FIXTURE.	1521

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2062	THE BATTERY SHALL BE VIBRATED AT 2062 CYCLES PER MINUTE.
2066	THE VERTICAL DISPLACEMENT SHALL BE 2068 INCHES DOUBLE AMPLITUDE.
2070	THE VIBRATION TEST SHALL HAVE A NOMINAL DURATION OF 2070 HOURS.
1503	SHOCK (HIGH IMPACT). REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1503.
1507	SHOCK (HIGH IMPACT). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1505	DURING TESTING, THE CELL SHALL DELIVER CONSTANT CURRENT AT A 1505 HOUR RATE.
1513	THE CLOSED CIRCUIT VOLTAGE SHALL BE MEASURED AT 1513 MINUTE INTERVALS BETWEEN SHOCK BLOWS.
1515	THE DISCHARGE TO TEST END VOLTAGE SHALL BE 1515 VOLTS PER CELL.
1517	THERE SHALL BE NO DAMAGE THAT WILL AFFECT FORM, FIT, OR FUNCTION.
1519	SHOCK (HIGH IMPACT). THE TEST SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1519.
1527	SHOCK (HIGH IMPACT). THE TEST SHALL BE PER MIL-STD-202, METHOD 207.
1521	ANY SUITABLE MOUNTING FIXTURE MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SUNSHINE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2352
AS FOLLOWS:	2354
THE BATTERY CASE SHALL SHOW NO VISIBLE DAMAGE.	2355
HEAT RISE, MAXIMUM (DEGREES C)	2356
TEST METHOD (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2332
TEST PER MIL-STD-810, METHOD 505, PROCEDURE (NUMBER)	2334
SOLAR RADIATION PER SQUARE FOOT (WATTS)	2340
TEMPERATURE RISE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2642
AS FOLLOWS:	2644
SPECIFIED MINIMUM AMPERE-HOUR CAPACITY.	2645
NO EVIDENCE OF ELECTROLYTE LEAKAGE.	2646

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2352	SUNSHINE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2352.
2354	SUNSHINE. THE REQUIREMENTS SHALL BE AS FOLLOWS:
2355	THE BATTERY CASE SHALL NOT CRACK, CRAZE, SAG, BLISTER, OR SHOW ANY APPRECIABLE CHANGE IN HARDNESS.
2356	THE HEAT RISE SHALL BE NOT GREATER THAN 2356 DEGREES C.
2332	SUNSHINE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2332.
2334	SUNSHINE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-810, METHOD 505, PROCEDURE 2334.
2340	THE SOLAR RADIATION SHALL BE 2340 WATTS PER SQUARE FOOT.
2642	TEMPERATURE RISE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2642.
2644	TEMPERATURE RISE. THE REQUIREMENTS SHALL BE AS FOLLOWS:
2645	THE AMPERE-HOUR CAPACITY SHALL BE NOT LESS THAN SPECIFIED.
2646	THERE SHALL BE NO EVIDENCE OF ELECTROLYTE LEAKAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE RISE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2622
PER MIL-B-23272.	2624
TEST TEMPERATURE (DEGREES C)	2626
DURATION (HOURS)	2627
THERMAL SHOCK	
REQUIREMENTS	
PER BASE DOCUMENT EXCEPT _____	4727
TEST METHODS	
PER BASE DOCUMENT EXCEPT _____	4713
THERMOSWITCH CYCLING (INTERNALLY HEATED BATTERIES)	
REQUIREMENT (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2802

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2622	TEMPERATURE RISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2622.
2624	TEMPERATURE RISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-B-23272.
2626 2627	THE BATTERY SHALL BE TESTED AT AN AMBIENT TEMPERATURE OF 2626 DEGREES C FOR A PERIOD OF 2627 HOURS.
4727	THERMAL SHOCK. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4727.
4713	THERMAL SHOCK. THE TEST SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4713.
2802	THERMOSWITCH CYCLING (INTERNALLY HEATED BATTERIES). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2802.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THERMOSWITCH CYCLING (INTERNALLY HEATED BATTERIES) (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2782
PER MIL-B-26220.	2784
APPLIED VOLTAGE FOR FIRST TEST (VOLTS RMS)	2786
FREQUENCY FOR FIRST TEST (HERTZ)	2788
APPLIED VOLTAGE FOR SECOND TEST (VOLTS RMS)	2792
FREQUENCY FOR SECOND TEST (HERTZ)	2794
WATERPROOFING OF JACKET	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2094
NO EVIDENCE OF WATER PENETRATION OR SEPARATION.	2096
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2079
PER DOCUMENT (DOC DES)	2075

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2782	THERMOSWITCH CYCLING (INTERNALLY HEATED BATTERIES) TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2782.
2784	THERMOSWITCH CYCLING (INTERNALLY HEATED BATTERIES) TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-B-26220.
2786	THE APPLIED VOLTAGE FOR THE FIRST TEST SHALL BE 2786 VOLTS (RMS).
2788	THE APPLIED FREQUENCY FOR THE FIRST TEST SHALL BE 2788 HERTZ.
2792	THE APPLIED VOLTAGE FOR THE SECOND TEST SHALL BE 2792 VOLTS (RMS).
2794	THE APPLIED FREQUENCY FOR THE SECOND TEST SHALL BE 2794 HERTZ.
2094	WATERPROOFING OF JACKET. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2094.
2096	WATERPROOFING OF JACKET. THE JACKET SHALL NOT FALL APART AND SHALL SHOW NO EVIDENCE OF WATER PENETRATION NOR SEPARATION BETWEEN LAYERS OF JACKET MATERIAL.
2079	WATERPROOFING OF JACKET. TESTING SHALL BE IN ACCORDANCE WITH BASE DOCUMENT, EXCEPT 2074.
2075	WATERPROOFING OF JACKET. TESTING SHALL BE IN ACCORDANCE WITH 2075.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOUNTING HARDWARE (SEE TABLE VIII, MIL-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VIII IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995
DEFINITION OF HERMETIC SEALING	
NOTE: AUTOMATIC WHEN CODES ARE USED TO REQUIRE HERMETIC SEALING.	
APPLICABLE DOCUMENTS (SEE MIL-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE MIL-STD-35)	
PACKAGING (SEE MIL-STD-35)	
NOTES (SEE MIL-STD-35)	
NOMENCLATURE (SEE MIL-STD-35)	
SUPERSEDED DOCUMENTS (SEE MIL-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE MIL-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

DEFINITION OF HERMETIC SEALING. FOR THE PURPOSE OF THIS DOCUMENT, A HERMETICALLY-SEALED ITEM IS ONE IN WHICH THE ELEMENT IS CONTAINED WITHIN A SEALED ENCLOSURE OF CERAMIC, GLASS OR METAL, OR A COMBINATION THEREOF, WHERE SEALING IS ACCOMPLISHED BY MATERIAL FUSION, WELDING, BRAZING OR SOLDERING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory).

6.1 Intended Use. This standard contains codes and paragraphs to be used to specify batteries.

6.2 Subject term (keyword) listing).

CELL, DRY
CELL, WET
POWER, STORAGE

6.3 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:
Army-MI

Review activities:
Army - AR, AT, CR, ER, ME, MR, SC

Preparing activity
Army - MI

(Project EGDS-A468)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX A

ILLUSTRATIONS

10. GENERAL

10.1 Scope. This appendix contains illustrations applicable to this standard which may be used to show configurations or schematics in an MSE. This appendix is not a mandatory part of the standard. The information contained herein is intended for guidance only.

20. Applicable documents. This section is not applicable to this appendix.

30. Utilization. When change to configuration in the base document is required enter the illustration number from this appendix with code 1009 on the SRS. If no suitable illustration is shown, send a dimensioned copy of required configuration with input and an illustration number will be assigned. Use code 4950 with illustration number for non-dimensioned input such as a schematic or send with input for illustration number assignment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

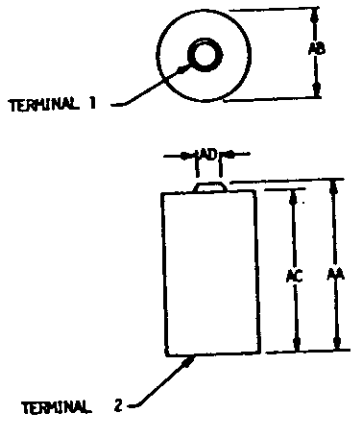


FIGURE 302-01-1

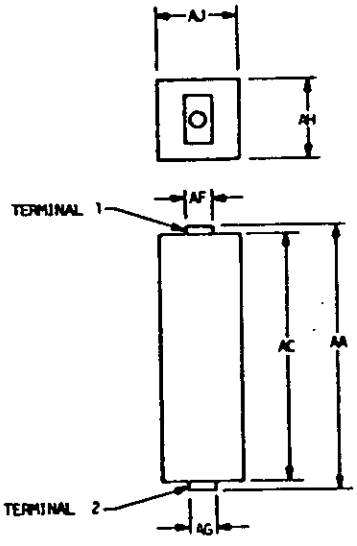


FIGURE 302-01-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

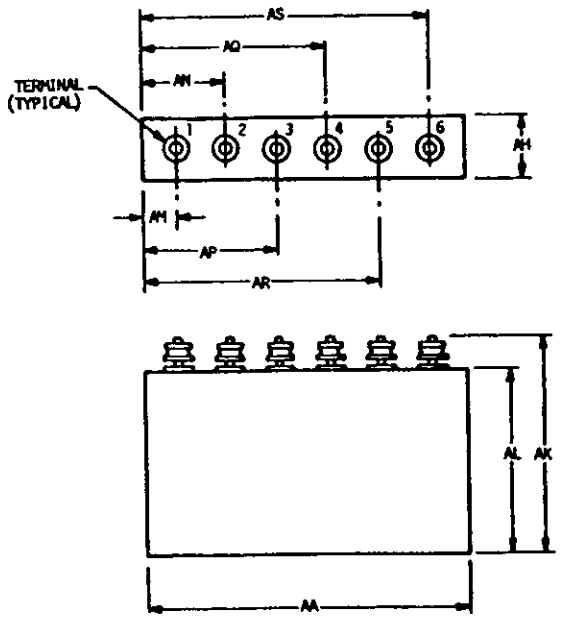


FIGURE 302-01-3.

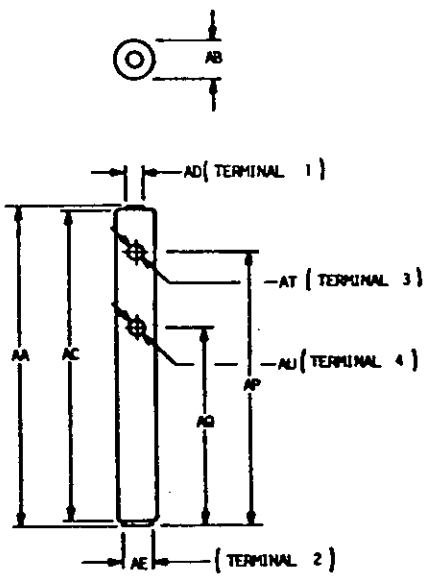


FIGURE 302-01-4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX B
CHARACTERISTIC CODE INDEX

10. GENERAL

10.1 Scope. This appendix cross references each code available in this standard to the page upon which the code appears. This appendix is not a mandatory part of the standard. The information contained herein is intended for guidance only.

20. Applicable documents. This section is not applicable to this appendix.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	10	1493	46	1760	22	2024	26
0102	10	1497	46	1762	22	2026	26
0103	10	1499	46	1763	22	2032	56
0104	10	1502	46	1764	22	2036	56
0105	10	1503	58	1766	22	2037	56
0107	12	1505	58	1767	22	2040	56
0108	12	1507	58	1772	22	2041	56
0700	10	1513	58	1773	22	2044	56
0800	10	1515	58	1778	22	2046	56
1004	10	1517	58	1792	20	2058	56
1005	10	1519	58	1794	20	2060	56
1006	10	1521	58	1796	20	2062	58
1008	10	1525	44	1798	20	2068	58
1371	40	1527	58	1800	20	2070	58
1379	40	1562	12	1802	22	2074	56
1416	16	1568	12	1804	22	2075	64
1418	16	1570	12	1806	22	2076	56
1426	54	1590	14	1882	50	2077	56
1427	54	1592	14	1884	50	2078	56
1444	52	1594	14	1898	50	2079	64
1445	52	1596	14	1900	50	2080	56
1449	34	1598	14	1904	54	2094	64
1451	34	1612	14	1912	54	2096	64
1454	34	1614	14	1914	54	2101	20
1457	34	1616	14	1942	44	2118	20
1461	34	1618	14	1946	44	2119	20
1463	34	1630	14	1962	44	2120	20
1465	34	1632	14	1964	44	2122	20
1468	46	1634	14	1973	42	2132	38
1469	34	1636	14	1978	42	2136	38
1471	34	1664	14	1980	42	2138	38
1473	44	1666	14	1988	26	2140	38
1477	44	1680	16	1990	26	2146	38
1479	44	1682	16	1992	26	2148	38
1481	44	1690	16	1994	26	2152	24
1483	44	1692	16	1996	26	2156	24
1485	44	1694	16	2002	26	2158	24
1487	46	1714	16	2004	26	2164	24
1489	46	1752	24	2012	26	2166	24
1491	46	1756	24	2013	26	2167	24

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2168	24	2356	60	2702	42	4763	28
2170	24	2362	52	2704	42	4785	54
2181	50	2364	52	2712	34	4789	54
2183	50	2368	52	2714	34	4809	38
2189	50	2370	52	2716	34	4810	38
2191	50	2492	36	2718	34	4811	38
2198	48	2498	36	2732	32	4812	38
2200	48	2500	36	2734	32	4817	36
2201	48	2501	36	2735	32	4818	36
2202	48	2502	36	2736	32	6369	10
2204	48	2504	36	2737	32	6372	66
2206	48	2512	48	2740	32	6870	66
2212	40	2514	48	2752	30	6873	10
2214	40	2516	48	2754	30	6874	10
2216	40	2518	48	2756	30	6941	12
2218	40	2520	48	2757	30	6942	12
2220	40	2522	48	2758	30	6991	68
2221	40	2528	48	2760	30	6992	68
2226	40	2534	46	2762	30	6993	68
2228	40	2536	46	2763	32	6994	68
2232	28	2537	46	2764	32	6995	68
2234	28	2538	46	2766	32	7001	66
2238	28	2602	52	2768	32	7002	66
2240	28	2604	52	2772	30	7003	66
2302	18	2608	50	2774	30	7004	66
2306	18	2610	50	2775	30	7005	66
2308	18	2622	62	2776	30	7629	66
2310	18	2624	62	2782	64	7630	66
2316	18	2626	62	2784	64		
2322	18	2627	62	2788	64		
2323	18	2642	60	2792	64		
2324	18	2644	60	2794	64		
2326	18	2645	60	2796	64		
2328	18	2646	60	2802	62		
2332	60	2652	42	4713	62		
2334	60	2660	42	4727	62		
2340	60	2662	42	4754	28		
2352	60	2664	42	4755	28		
2354	60	2666	42	4756	28		
2355	60	2668	42	4762	28		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX

	PAGE
Additional Part Marking	68
Additional Requirements	66
Altitude	18
Aperture Cards	12
Applicable Documents	68
Base Document	10
Bulge Resistance	20
Capacity Discharge	20
City, State, Zip	10
Closed Circuit Voltage	22
Company Name/Command	10
Contract Number/Office Symbol	10
Control	10
Definition of Hermetic Sealing	68
Design and Construction	12
Drop Test	24
Electrical Breakdown of Containers	26
Electrolyte Leakage	26
Explosive Atmosphere	28
Format	10
Fungus	28
Government Design Activity Cage	10
Heater Endurance (Internally Heated Batteries)	30
Heater Performance (Internally Heated Batteries)	32
High Frequency Vibration	34
Hydrogen Evolution (Gassing)	36
Immersion (Leakage)	36
Impact Resistance	38
Insulation Resistance	40
Internal Air Pressure	40
Inversion	42
Internal Dry Insulation Resistance	42

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	PAGE
Life Cycle Capacity	44
Low Frequency Vibration	44
Magnetic Effect	46
Mechanical Shock	48
Mounting Hardware	66
Nomenclature	68
Notes	68
Overcharge Cycle	50
Part Marking	66
Part Number	12
Part Number Cross-Reference	68
Phone Number	10
Potassium Carbonate	50
Quality Assurance Provisions	68
Rain	52
Random Vibration	52
Retention of Charge	54
Requester`s Cage	10
Requester`s Name	10
Revision of AEDPS Document	12
Salt Spray	54
Sealing Compound Test	56
Scope	12
Shock (High Impact)	58
Source	12
Street/Building	10
Sunshine	60
Superseded Documents	68
System Application	10
Temperature Rise	60
Thermal Shock	62
Thermoswitch Cycling (Internally Heated Batteries)	62
Units of Measure	12
Waterproofing of Jacket	64
Workmanship	66

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-STD-35-39A(MI)	930730

3. DOCUMENT TITLE

Automated Engineering Document Preparation System - Batteries

4. NATURE OF CHANGE (*Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.*)

5. REASON FOR RECOMMENDATION

6. SUBMITTER		
a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY		
a. NAME U.S. Army Missile Command	b. TELEPHONE (Include Area Code) (1) Commercial 205-876-6980	(2) AUTOVON 746-6980
c. ADDRESS (Include Zip Code) Commander, U.S. Army Missile Command, ATTN: AMSMI-RD-SE-TD-ST, Redstone Arsenal, AL 35898-5270	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD FORM 89 OCT 1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.