MIL-STD-35-43(MI)

1 MAY 1974

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

ANTENNAS

FSC-EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL COMMAND
Washington, D.C. 20315

Automated Engineering
Document Preparation System,
MIL-STD-35-43(MI)

1. This Military Standard is approved by the U.S. Army Materiel Command, Department of the Army, and is mandatory for use by all its activities. All other military activities are required to employ this Standard where suitable.

2. Recommended corrections, additions or deletions should be addressed to Commander, U.S. Army Missile Command, ATTN: AMSMI-RCS, Redstone Arsenal, Alabama 35809.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of MIL-STD-35-43(MI) is to facilitate the preparation of Military Specification Exceptions for antennas.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the basic MIL-STD-35, along with MIL-STD-35-1 for Materials, and MIL-STD-35-2 for Finishes.

3. It is important that the Procedure described in the basic document (MIL-STD-35) be followed explicitly in order for the computer to produce a document suitable for competitive procurement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS

SECTION	TITLE	PAGE
1.0	Antennas	1
1.1	Specification Title Index	3
1.2	Specification Requirements Instructions	5
1.2.1	General	5
1.2.1.1	Tabulation Table	6
1.2.2	Effectivity of Data	9
1.2.3	Writing Methodology	9
1.2.4	Characteristic Codes and Characteristic Value Codes	10
1.2.5	Antenna Characteristics	11
1.2.6	Dimensions and Drawings	12
1.2.7	Materials and Finishes	12
1.2.8	Additional Requirements, Marking, Packaging, Quality Assurance and Notes	13
1.2.9	Applicable Documents	14
1.2.10	Quality Assurance and Conformance	16
1.2.11	Detailed Requirements	17
1.2.12	Date	17
1.2.13	FSCM/Code Ident of Requester	17
1.2.14	Prime Contract Number	18
1.2.15	Applicable General Specification	18

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

SECTION	TITLE	PAGE
1.2.16	Generated Document	18
1.2.17	Item Application	18
1.2.18	Drawing Figure Number(s)	18
1.2.19	Dimensions	18
1.2.20	Body Style	19
1.2.21	Design and Construction	19
1.2.22	Operating Parameters	20
1.2.23	Frequency Range	20
1.2.24	Material	21
1.2.25	Finish	22
1.2.26	Radiation Pattern	24
1.2.27	Gain	25
1.2.28	Insulation Resistance	26
1.2.29	Impedance	26
1.2.30	Voltage Standing Wave Ratio (VSWR)	27
1.2.31	Power Capability	28
1.2.32	Radio Interference	29
1.2.33	Continuity	30
1.2.34	Feed System Efficiency	30
1.2.35	Admittance	31
1.2.36	Orientation	32
1.2.37	Flight Test	32

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION	TITLE	PAGE
1.2.38	Impact	33
1.2.39	Air-Seal	34
1.2.40	Leakage	35
1.2.41	Bounce	35
1.2.42	Flexural Strength	36
1.2.43	Static Load	37
1.2.44	Altitude	38
1.2.45	Wind	38
1.2.46	Ice	39
1.2.47	Sand and Dust	40
1.2.48	Rain	40
1.2.49	High Temperature	41
1.2.50	Low Temperature	42
1.2.51	Thermal Shock	43
1.2.52	Shock	44
1.2.53	Fungus Resistance	45
1.2.54	Salt Fog	45
1.2.55	Humidity	46
1.2.56	Moisture Resistance	47
1.2.57	Random Vibration	48
1.2.58	High Frequency Vibration	48
1.2.59	Low Frequency Vibration	49

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION	TITLE	PAGE
1.2.60	Preparation for Delivery	50
1.2.61	Workmanship	50
1.2.62	Supersession Data	51
1.2.63	Sources	51
1.2.64	Material and Process Substitution	52
1.2.65	Test Data and Test Methods	52
1.2.66	Specification Requirements, Appendices, and SRS	53
1.2.67	Specification Requirements Sheet (SRS) Form	53
1.2.68	Searching for Existing Documents	54
1.2.68.1	General Requirements	54
1.2.68.2	Instructions	54
	Specification Requirements	57-111
	Quality Assurance Requirements	113-119
	Special Requirements	121,122
	Tables	123,124
	Appendices	125-142
1.3	Configuration and Drawings	143
1.3.1	Figure Titles vs. Figure Numbers	145
1.3.2	Legend Index	147

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION	TITLE	PAGE
	Figure Ø92-Ø1-1 thru Ø92-Ø2-1	149-155
	Reproducible Fold-out Specification Requirements Sheet (SRS) Forms	157-159
	Tabulation Table Form	161

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 1.0

ANTENNAS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 1.1

SPECIFICATION TITLE INDEX

Specification Title Code*	Specification Title	Applicable Document
Ø92ØØ1	Antennas, VHF, Airborne	MIL-A-6271 MIL-A-7157 MIL-A-6300 MIL-A-18357
Ø92ØØ2	Antennas, VHF, Ground	MIL-A-11187 MIL-A-11194 MIL-A-14448 MIL-A-55012 MIL-A-55067 MIL-A-55101 MIL-A-55138 MIL-A-55288 MIL-A-55379
Ø92ØØ3	Antennas, UHF, Airborne	MIL-A-6224 MIL-A-6235 MIL-A-7272 MIL-A-14053 MIL-A-18376 MIL-A-18793 MIL-A-22212 MIL-A-25895 MIL-A-25903 MIL-A-26336 MIL-A-26665 MIL-A-27603
Ø92ØØ4	Antennas, UHF, Airborne	MIL-A-5815
Ø92ØØ5	Antennas, UHF, Ground	MIL-A-4946
Ø92ØØ6	Antennas, UHF, Shipboard	MIL-A-23766 MIL-A-24233 MIL-A-28745

*Note - The six (6) digits of the title code are placed in the first six (6) digits of the simplified SRS.

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 1.1 SPECIFICATION TITLE INDEX (CONT.)

Specification Title Code*	Specification Title	Applicable Document
092007	Antennas, Radar Scanner	MIL-A-19273
092008	Antennas, C-Band Beacon	MIL-A-27445
092009	Antennas, Multi-Frequency, Ground	MIL-A-55468

*Note - The six (6) digits of the title code are placed in the first six (6) digits of the simplified SRS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 1.2

SPECIFICATION REQUIREMENTS INSTRUCTIONS

1.2.1 General

The purpose of this instruction is to establish the procedures to be followed, and the format to be used, for submission of requirements to obtain a computer generated procurement document.

Requirement definition is through the use of a Specification Requirement Sheet (SRS). Requirements are shown in the Specification Requirements List (pages 57 through 111). The characteristic codes and values for these requirements are entered on the SRS (pages 157 and 159). Besides assisting the user in preparing his requirements for coverage by the Automated Engineering Document Preparation System (AEDPS), the SRS is used in formulating instructions to the computer.

Certain characteristic codes are mandatory to the preparation of a document by the computer. The designation for mandatory characteristic codes will be an asterisk (*) before the characteristic name. If the asterisk is at the far left edge, it is fully mandatory to get a satisfactory document. For example, Codes 1003 through 1009 must be completed. If the asterisk is by an indentured item, it is mandatory only for the item above it that is not indentured to the same extent. For example, if Code 6871 is desired, Code 6872 must also be completed. Most characteristic codes will generate paragraphs. Other characteristic codes will be required for comparison purposes only or for inclusion in separate characteristic tables.

The document generated by the AEDPS automatically refers to the referenced specification for established requirements and mandatory tests. If added test(s) or changes to existing test(s) are required, the requirement(s) for these test(s) must be specified. This can be accomplished by selecting the proper code(s) from the Specification Requirements List and completing the required Appendix.

Reproducible copies of the SRS are located immediately following the Figures in Section 1.3. They are to be locally reproduced and used for submittal of request for documentation.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

Characteristics that are not absolutely essential for proper identification and establishment of requirements should be omitted. Many non-standard items become cost prohibitive through OVER-SPECIFYING. When the requirements and tests in the specification referenced with Code 1006 meet the user's requirements, parameters (codes) which are void of an asterisk (*), at the far left edge of the Specification Requirements List, should not be used.

1.2.1.1 Tabulation Table

The AEDPS has the capability for documenting a number of parts on a single specification. This subparagraph provides the instructions necessary to use this capability. A removable foldout Tabulation Table form is furnished following the SRS forms located in Section 1.3. This form is to be locally reproduced for use in submitting requests for computer generated Military Specification, Exceptions. An example of Tabulation Table usage is detailed in the following paragraphs.

The Tabulation Table provides the capability for tabulation of 50 items and up to 10 variables per item. The SRS form may be used in lieu of the Tabulation Table for reasons of convenience or necessity due to write-in space limitations. If the SRS form is used, each pertinent Characteristic Code and corresponding value(s) must be transposed to the SRS using the rules outlined in 1.2.1.

In using the Tabulation Table, for example, it may be required that several antennas be specified, all having the same VSWR characteristics but different gain capabilities. Each antenna will then be identified by a dash number assigned to the generated document basic part number, such as 01 through 04 as shown in the Tabulation Table illustration. On the Tabulation Table adjacent to Code 8000 is entered the Characteristic Code used to designate the gain for the antennas, in this case, Code 1687. Adjacent to each subsequent Characteristic Code in the first column, is entered the value in decibels for the desired gain. It may also be desirous to tabulate the half power beam widths for the several antennas. The Characteristic Code that represents the beam width, Code 1620 for antennas, is entered adjacent to Code 8051 at the head of the second column. The maximum beam width in degrees that is pertinent to the gain specified with Code 8001, is entered adjacent to Code 8052.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The Tabulation Table may also be used for tabulating dimensions from Appendix A. From the above example, it may be required that each antenna assembly overall length be different. Overall length in the antenna figures is represented by the legend letters "AA" and Charactertistic Code 1010 in Appendix A. It is not necessary to write-in the code for legend "AA" on the Tabulation Table, but it is necessary to specify the Characteristic Codes representing the minimum and/or the maximum dimensions. Minimum overall length, Code 1011, is entered adjacent to Code 8102 and/or maximum overall length, Code 1012, is entered adjacent to Code 8153. The minimum dimensional value for the dash-number 01 item is then specified with Code 8103 and the maximum dimensional value is specified with Code 8154, as applicable. Applicable dimensions or other values not requiring tabulation shall be specified on the SRS along with applicable code(s) (see 1.2.1).

The following will illustrate the proper usage of the Tabulation Table and Characteristic Codes for the example described above.

DASH NO.	CODE	CHARACTERISTIC CODE & VALUES FOR TABULATION	CODE	CHARACTERISTIC CODE & VALUES FOR TABULATION	CODE	CHARACTERISTIC CODE & VALUES FOR TABULATION	CODE	CHARACTERISTIC CODE & VALUES FOR TABULATION
	8000	168#	8051	162Ø#	8102	1Ø11#	8153	1Ø12#
01	8001	1Ø#	8052	4Ø#	8103	2Ø#	8154	2Ø.5Ø#
02	8002	2Ø#	8053	1F#	8104	12#	8155	12.75#
03	8003	14#	8054	23#	8105	3Ø#	8156	3Ø.25#
04	8004	8#	8055	45#	8106	36#	8157	36.5Ø#
05	8005		8056		8107		8158	
06	8006		8057		8108		8159	

In addition to applicable dimensional values from Appendix A, the following is a list of Characteristic Codes and titles that are candidates for Tabulation Table usage within the scope of this document.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

ANTENNAS

Characteristic Code	Title
	Weight
1598	Pounds
1599	Ounces
	Radiation Pattern
1662	Degrees (Average)
1663	Degrees (Maximum)
	Frequency
1635	Lower Limits
1636	Upper Limits
1727	Voltage Standing Wave Ratio
1684	Gain
1736	Power Capability
1737	Test Duration
1710	Impedance
1620, 1621, 1622 or 1623	Beamwidth
1779	Efficiency (RF Voltage per Band)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.2 Effectivity of Data

Preparation of an acceptable computer generated document is dependent upon clear, accurate, complete and concise delineation of the requirements on the SRS. The information provided on the SRS is furnished directly into the computer and any inaccuracies or inadequacies in the data submitted will directly affect the computer generated document.

1.2.3 Writing Methodology

The following rules govern the write-in values on the SRS and the Tabulation Table Form:

a. Only block lettering shall be used.

b. The letter "O" shall be a round circle.

c. The numeral zero shall be a round circle with a diagonal line through it "Ø".

d. The letter "I" shall have pronounced serifs top and bottom.

e. The numeral "one" shall be a straight vertical line " I ".

f. The letter "Z" shall have a horizontal line through it "Ƶ".

g. The "+" sign or the words "plus or minus" shall not be used. "+ or -" should be the form used, if needed.

h. The signs "$", "¢", or "!" shall never be used.

i. Except for materials (MIL-STD-35-1) and finishes (MIL-STD-35-2), abbreviations conforming to MIL-STD-12 may be used for reasons of convenience or write-in space limitations.

j. The pound sign "#" must never be used, except to indicate the end of a value or write-in, where it must always be used. If the last character of the write-in should fall in column 79 of the SRS, the pound sign "#" should not be placed in column 80. A new line should be started by placing a "1" in column 80 of the first line, a "2" in column 80 of the second line, and the pound sign "#" entered in column 17 of the second line. (A write-in shall never exceed 3 lines on the SRS as this is equal to the 189 character write-in limit.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

k. All fractions must be specified in decimal form. All values less than one (1.Ø) must be preceded by the numeral Ø; i.e., Ø.375.

l. When a write-in value is used to express percentage, the value must be followed by the word "percent", and not the sign "%". If (percent) is shown in the Specification Requirements, the word should not be repeated on the SRS.

m. When a write-in value is used to express temperature in degrees C (Celsius), the value must be followed by the word "degrees C" and not the sign "°C". If degrees C is shown on the Specification Requirements List as (degrees C), the word need not be repeated on the SRS as it will be provided automatically in the generated document.

n. When a write-in value is used to express a temperature that is "below zero" degrees C, the value must be preceded by the minus sign "-".

p. When it is required to express an exponential value on the SRS, such as 2.0 X 10^5, the value shall be written as follows: "2.Ø X 1Ø TO THE 5TH POWER".

1.2.4 Characteristic Codes and Characteristic Value Codes

Each characteristic name which defines a requirement has been assigned a code number for use in the computer. These codes are referred to as characteristic codes, and are of a numeric value, therefore, all characteristic codes must have the zeroes slashed with a diagonal line (Ø) when entered on the SRS. Additional characteristic codes which are required to further define an item are contained in the appendices to the Specification Requirements. These are:

Dimension Characteristic Table	Appendix A (see 1.2.6)
Applicable Documents Table	Appendix B (see 1.2.9)
First Article Inspection Table	Appendix C (see 1.2.10)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Group A Quality Conformance Table	Appendix D (see 1.2.10)
Group B Quality Conformance Table	Appendix E-1 (see 1.2.10)
Group B Quality Conformance Table	Appendix E-2 (see 1.2.10)
Group C Quality Conformance Table	Appendix F (see 1.2.10)
Quality Conformance Sequence Table	Appendix G (see 1.2.10)
Deleted Test Table (Groups A, B, and C)	Appendix H (see 1.2.10)
Deleted First Article Tests	Appendix J (see 1.2.10)
Source Tabulation Table	Appendix S (see 1.2.62)

Note: It is not necessary to complete each Characteristic Code on each line of the Appendices or Tables. For example, if Code 6125 is used in Appendix C, Codes 6126, 6127 and 6128 need not be used on the SRS if no value or write-in is to be specified with these codes. When the computer document is generated, print-outs of specified Tables and Appendices will be similar in format to those shown in this document. Therefore, a blank space will be provided in that column and line where a Characteristic Code and value is not specified.

Specification titles, materials, and finishes have been assigned code numbers for computer use. These are referred to as Characteristic Value Codes. The Characteristic Value Codes required for completing the SRS are located as follows:

Specification Titles	Section 1.1
Materials	MIL-STD-35-1
Finishes	MIL-STD-35-2

1.2.5 Antenna Characteristics

The antenna characteristics are tabulated in the Specification Requirements List (SRL).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

1.2.6 Dimensions and Drawings

Dimensional Data must be supplied for all legends applicable to the antenna selected in Section 1.3. All values must be in inches and must be in numerical decimal form. All values less than one (1.Ø) must be preceded by the numeral Ø; i.e., Ø.375. The Dimension Table and related Characteristic Codes are provided as Appendix A. Both the minimum and maximum values and the legend letters shall be specified, as applicable. It is not necessary to complete each line or the entire Appendix A, just those codes that are applicable to the Drawing Figure used. When Appendix A is used with the SRS, Characteristic Codes representing the applicable legend letters must be placed on the SRS as well as the code number for the minimum and/or maximum dimensional data specified. If Appendix A is used in conjunction with the Tabulation Table, it is not necessary to specify the legend letter code, only the dimensional data code(s). For "reference", "nontolerance", and "thread dimensions", the dimension shall be placed in the minimum column and "REF", "NTOL", or thread type, such as "UNC" or "NEF", shall be placed in the maximum column. If length of thread is necessary, it must be entered in the minimum column, for example, 6-32XØ.25Ø.

Caution: When a Figure is shown in the Configuration and Drawing Section that might need a minor change, a copy of the marked up figure may be submitted with the SRS. When there is no figure shown that can be used without a major change, do not proceed. To have an unlisted item covered, a drawing with all dimensions must be furnished USAMICOM, Attn: AMSMI-RCS. A drawing with legend letters will be prepared, assigned a figure number and returned to the requester.

Dimensional Data may be tabulated by using the Tabulation Table form provided in this document. Usage of this table is detailed in 1.2.1.1.

1.2.7 Materials and Finishes

Whenever the Specification Requirements reference a material or finish, its code may be entered on the SRS with the 6 digit characteristic value code from the left-hand column of MIL-STD-35-1 or MIL-STD-35-2 as applicable. The material or finish nomenclature as shown in the center column will be the exact words that will appear in the generated document. When a material or finish specification is desired, it may be entered on the SRS with the applicable code from the Specification Requirements. Documents other than as specified in the right-hand column of MIL-STD-35-1 and MIL-STD-35-2 may be used, if necessary. Any document referenced must also be entered on the SRS with a code from Appendix B.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

Note: When a desired material or finish is not shown, the system has the capability for accepting write-ins; i.e., "aluminum" can be shown as a material and "grey paint" may be shown as a finish.

To have an unlisted material or finish added to MIL-STD-35-1 or MIL-STD-35-2, the nomenclature and any applicable specifications for the desired material or finish must be furnished to USAMICOM, Attn: AMSMI-RCS. The assigned Characteristic Value Codes will be returned to the requester.

1.2.8 Additional Requirements, Marking, Packaging, Quality Assurance and Notes

Computer generated documents have the capability of accepting additional write-ins, over and above the parameters specified in the Specification Requirements by Specific Characteristic Codes. These write-ins will appear in the completed document as Section 3 for the Requirements and Marking, Section 4 for the Quality Assurance, Section 5 for the Packaging, and Section 6 for the Notes. Codes to be used are as follows:

Requirements	7001 through 7005
Marking	6991 through 6995
Quality Assurance	7011 through 7015
Packaging	7006 through 7010
Notes	7016 through 7020

These should be completed on the SRS using the codes shown above. The write-in should be in the exact words desired, but limited to 189 characters (including spaces and punctuation marks) for each characteristic code. When an additional requirement is added in Codes 7001 through 7005, an additional test is usually required (Codes 7011 through 7015).

Computer generated documents on antennas will automatically have a requirement to package them in accordance with the document shown with Code 1006. If there are additional packaging requirements, these should be added through the use of Codes 7006 through 7010.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

If additional notes are required in Section 6, these should be stated using Characteristic Codes 7016 through 7020.

Part marking shall be in accordance with the document shown with Code 1006. Additional marking requirements may be specified on the SRS with appropriate code(s) between 6991 and 6995.

1.2.9 Applicable Documents

Any specification or other document entered as a characteristic value for any Characteristic Code must also be listed with a code from Appendix B, in their proper numerical sequence. Only the number is required. Specification and/or document number entries shall be void of blank spaces; i.e.; a number, letter, or punctuation mark must occupy every space from the beginning to the end of the entry. For example, ANSI B 46.1 must be entered on the SRS as: 6Ø95ANSIB46.1#. It is not necessary to list titles.

In addition to the above, entry of the following documents may be necessary using an appropriate code from Appendix B:

a. H4-1 when the source table or source tabulation table is used (Federal Supply Code for Manufacturers, United States and Canada, Name to Code).

b. When Code 1569 (coaxial connectors) is used, one of the following specifications is to be referenced:

MIL-C-71	Connectors "N" For Radio Frequency Cables
MIL-C-3608	Connectors "BNC" For Radio Frequency Cables
MIL-C-39012	Connector, Coaxial, Radio Frequency, General Specification For

Source: https://assist.dla.mil -- Downloaded: 2026Ø10-26T07:24Z
Check the source to verify that this is the current version before use.

c. When Code 1446 (high frequency vibration) or Code 1462 (low frequency vibration) is used, one of the following specifications is to be referenced:

MIL-A-7157	Antenna
MIL-A-55101	Antenna
MIL-A-55468	Antenna Group

d. When codes from the color number column of Table II (Finish Table) are used, the following standard is to be referenced:

FED-STD-595	Colors

e. When Code 1653 (Radiation Pattern) is used, one of the following specifications is to be referenced:

MIL-A-7157	Antenna
MIL-A-4946	Antenna Assembly
MIL-A-18376	Antenna and Antenna Base
MIL-A-55379	Antenna Group P/O Direction Finder
MIL-A-55468	Antenna Group
MIL-A-6300	Antennae Omnidirectional Receiving Equipment, General Specification for Design of

f. MIL-STD-810 (Environmental Test Methods) when the following Characteristic Codes are used:

Code	Paragraph
1907	Altitude
1947	Sand and Dust
1967 or 1968 and 1969	Rain
1977	High Temperature
1994 and 1996	Low Temperature

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

Code	Paragraph
4714	Thermal Shock
1498	Shock
4755	Fungus Resistance
4771	Salt Fog
4789	Humidity
1427	Random Vibration

g. MIL-STD-169 (Extreme-Temperature Cycle) when the following Characteristic Codes are used:

Code	Paragraph
1983	High Temperature
1999	Low Temperature

h. MIL-STD-202 (Test Methods for Electronic and Electrical Component Parts) when the following Characteristic Codes are used:

Code	Paragraph
1392	Moisture Resistance
1443	High Frequency Vibration
1458	Low Frequency Vibration

i. MIL-STD-167 (Mechanical Vibrations of Shipboard Equipment) when Code 1434 (Random Vibration) is used.

j. MIL-STD-170 (Moisture Resistance Test Cycle for Ground Signal and Electronic Test Equipment) when Code 1396 (Moisture Resistance) is used.

1.2.10 Quality Assurance and Conformance

Quality Assurance requirements are mandatory to the preparation of an acceptable final document. Appendices C, D, E, F, G, H, and J are to be used when making changes to the First Article, Group A, B, and C inspections. Unless modified, these inspections will be in strict accordance with the procedures outlined in the applicable general specification. If it is desired to add, delete or modify the tests or sequence in any manner, the exceptions must be specified on the SRS with codes from the Quality Assurance Requirements and/or the applicable appendices. One requirement must be selected from each of Group A, B and C. Enter an "X" in the value column by the selected Characteristic Code.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

If Appendix D is used with Code 7031, the last three columns should be used to specify the sampling plan. If sampling, as specified in MIL-STD-105, is to be used, use Code 7033 with an "X" and specify the inspection level in the Quantity Inspected column, and the applicable AQL's in the "AQL" columns. The generated document will specify normal inspection, single sampling. If 100 percent sampling is to be used, use Code 7034 with an "X" and specify 100 percent in the Quantity Inspected column. If a limit is to be placed on the percent defective for 100 percent inspection, use Code 7035 and specify the maximum percent defective. If the tests to be performed are to be divided into subgroups, use Code 7036 with an "X"; the subgroup number should be shown in the Title column, and the sampling plan applicable to all tests in the subgroup should be shown in the remaining columns. The tests that make up the subgroup should be listed, in the order they are to be performed, in the Title column. The generated document will specify that all tests listed under a subgroup will be combined and inspected per the sampling plan specified.

Military Specification Exceptions will eliminate requirements for Qualification.

1.2.11 Detailed Requirements

A Specification Title Index (Section 1.1) with Characteristic Value Codes has been established for each title and the related applicable general specification. The Characteristic Value Code for the antenna title selected must be entered in the title code block at the top of each page of the SRS. The six digits of the serial number shall be shown and may be used for user internal control.

Caution: When there is no suitable Specification Title Code, do not proceed. To have a Specification Title Code assigned, a request must be forwarded to USAMICOM, Attn: AMSMI-RCS, giving the desired title along with the related applicable general specification. A code will be assigned and returned to the requester.

1.2.12 Date

The date the user desires to appear on his generated document must be written in military format with Code 1003 on the SRS; i.e., 3 July 1973. Do not abbreviate month of year. A space must appear between date, month and year.

1.2.13 FSCM/Code Ident of Requester

The requester's Federal Supply Code for Manufacturers (FSCM) shall be entered on the SRS with Code 1004. The FSCM can be obtained from Cataloging Handbook H4-1 when it is unknown.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.14 Prime Contract Number

It is necessary for statistical purposes to have the contract number of the prime contract entered on the SRS with Code 1005. If the contract number is unknown, the requester's Contracts Department can furnish it. For government use, the abbreviated proper name and office symbol shall be used, i.e., "USAMICOM, AMSMI-RCS".

1.2.15 Applicable General Specification

The applicable general specification is the document to which an exception is being taken and can be found in the Specification Title Index in each part to this Standard. The specification must be entered on the SRS with Code 1006 (the slash sheet, MS number, or part number should be entered, if applicable to identify the item). The number must also be entered on the SRS with the appropriate code from Appendix B (without slash or part number). If MS numbers are used, these must also be shown on the SRS with code(s) from Appendix B. An example of how multiple numbers are to be shown with Code 1006 on the SRS is as follows: "1ØØ6MIL-A-6271#" or "1ØØ6MIL-A-6271 AND MIL-A-6300#". Only the portion that is underlined in the example should be used with codes from Appendix B on the SRS.

1.2.16 Generated Document

The generated document provides exceptions to an existing specification. The existing specification details will be binding unless the generated document makes an exception. The combined provisions, requirements and tests of the two documents will then be the document for procurement.

1.2.17 Item Application

Code 1008 must show item application such as: next assembly drawing number or type of equipment, i.e., AN/GRC-19, MISSILE X, etc.

1.2.18 Drawing Figure Number(s)

Code 1009 must show the figure number selected from Section 1.3. Where it may be necessary to show more than one figure to describe an item, the figure numbers must be in correct sequence as in the following example: "1ØØ9Ø92-Ø1-1 AND Ø92-Ø2-1#".

1.2.19 Dimensions

Use Appendix A to complete the SRS with the required dimensions. See 1.2.6 for table fill-in instructions.

Source: https://assist.dla.mil -- Downloaded: 2026Ø10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.20 Body Style

If it is desired to specify the antenna body style, enter Code 1562 on the SRS followed by the style number from the figure referenced by using Code 1009 (see 1.2.18).

1.2.21 Design and Construction

If it is desired to specify the antenna termination type, enter Code 1563, 1564, 1565, 1566 or 1567, as appropriate, on the SRS followed by an "X".

If it is desired to specify the input coaxial connector, it is mandatory to enter Codes 1568, 1569, and 1570 on the SRS followed by the appropriate data.

If it is desired to specify the mounting facility, enter Code 1574, 1575, 1576, 1577, 1578 or 1579, as appropriate, on the SRS followed by an "X".

If it is desired to specify the mounting type, enter Code 1580, 1581, 1582, 1583, 1584, 1585, 1586 or 1587, as appropriate, on the SRS followed by an "X".

If it is desired to specify the mounting holes, enter Code 1588 on the SRS followed by the number of holes.

If it is desired to specify the positioning device, enter Code 1592 or 1593, as appropriate, on the SRS followed by an "X".

If it is desired to specify the scanning method, enter Code 1594, 1595, 1596 or 1597, as appropriate, on the SRS followed by an "X".

If it is desired to specify the weight of the antenna, enter Code 1598 or 1599 on the SRS followed by the maximum allowable weight in pounds or ounces, respectively.

If it is desired to specify polarization, enter Code 1600, 1601, or 1602, as appropriate, on the SRS followed by vertical or horizontal, right hand or left hand, or an "X", respectively.

If it is desired to specify service life, enter Code 1606, 1607, or 1608, as appropriate, on the SRS followed by the nominal service life in years, months or hours, respectively.

If it is desired to specify the duty cycle, it is mandatory to enter Codes 1609 and 1610 on the SRS followed by the on and off hours, respectively.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

If it is desired to specify the electrical length, enter Code 1611, 1612 or 1613, as appropriate, on the SRS followed by the desired electrical length in meters, feet or ounces, respectively. If the electrical length is specified, it is mandatory to enter Code 1614 on the SRS followed by full, one-half or one-fourth as appropriate.

1.2.22 Operating Parameters

If it is desired to specify the input voltage, enter Code 1615 or 1617, as appropriate, on the SRS followed by the nominal voltage in volts AC or volts DC, respectively. If Code 1615 is used, it is possible to specify the tolerance of the AC voltage by entering Code 1616 on the SRS followed by the ± volts AC. If Code 1617 is used, it is possible to specify the tolerance of the DC voltage by entering Code 1618 on the SRS followed by the ± volts DC.

If it is desired to specify the beam width at the half power points, it is mandatory to enter Codes 1620 and 1622 on the SRS followed by maximum width of the E plane and the maximum width of the H plane, respectively, in degrees. If Code 1620 is used, it is mandatory to specify the frequency at which the H plane measurement is made by entering Code 1621 on the SRS followed by the frequency in megaHertz. If Code 1622 is used, it is mandatory to specify the frequency at which the E plane measurement is made by entering Code 1623 on the SRS followed by the frequency in megaHertz.

If it is desired to specify the ratio, enter Code 1624 or 1625 on the SRS followed by axial ratio or the front to back ratio, respectively, in decibels.

If it is desired to specify the pattern type, enter Code 1626, 1627, 1628, 1629 or 1630, as appropriate, on the SRS followed by an "X" to specify omnidirectional, unidirectional, pencil-beam, fan-beam or shaped-beam, respectively.

1.2.23 Frequency Range

If it is desired to take exception to the test procedure shown in the document referenced by using Code 1006, enter Code 1634 on the SRS and complete the sentence shown with Code 1634 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify the operating frequency range, it is mandatory to enter Codes 1635 and 1636 on the SRS followed by the lower frequency limit and the upper frequency limit, respectively, in megaHertz. If it is desired to specify the requirement shown with Code 1637 in the SRL, enter Code 1637 on the SRS followed by an "X".

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.24 Material

If it is desired to specify selection of material in accordance with MIL-E-5400, enter Code 1641 on the SRS followed by an "X". If Code 1641 is used, enter MIL-E-5400 on the SRS with an appropriate code from Appendix B (see 1.2.9).

If it is desired to specify selection of material in accordance with MIL-E-16400, enter Code 1642 on the SRS followed by an "X". If Code 1642 is used, enter MIL-E-16400 on the SRS with an appropriate code from Appendix B (see 1.2.9).

If it is desired to specify selection of material in accordance with MIL-P-11268, enter Code 1643 on the SRS followed by an "X". If Code 1643 is used, enter MIL-P-11268 on the SRS with an appropriate code from Appendix B (see 1.2.9).

If it is desired to specify materials in accordance with Table I, the Materials Table, enter Code 1644 on the SRS followed by an "X". Also, enter the appropriate codes from the appropriate columns of Table I on the SRS, followed with the desired data to fill these columns. See 1.2.6 for additional instructions on use of codes from a table. The fills (desired data) for each of the above columns should be limited as follows:

Component - 14 spaces
Material - 28 spaces
Specification - 13 spaces
Number or Alloy Number - 4 spaces
Condition or Temper - 9 spaces
Form - 8 spaces
Class - 3 spaces
Grade - 3 spaces
Type - 3 spaces
Composition - 13 spaces

If more than the allotted spaces are filled-in, the computer will print the information on additional lines in the allotted column.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

An example of the use of codes from these columns of Table I is as follows:

CHAR CODE 13 14 15 16	VALUE 20 25 30 35 40
5 0 8 0	ELEMENT#
5 0 8 1	AL00 29#
5 0 8 2	QQ-A-2 00 1 1#
5 0 8 3	3 00 3#
5 0 8 4	H 1 1 2#
6 0 9 5	QQ-A-2 00 1 1#

NOTE: If a specification(s) is referenced by using Code 5082, etc., the number of this document(s) must also be entered again on the SRS, using an appropriate code(s) from Appendix B (see 1.2.9).

1.2.25 Finish

If it is desired to specify that finish shall be in accordance with MIL-F-14072, enter Code 1647 on the SRS followed by an "X". If Code 1647 is used, enter MIL-F-14072 on the SRS with an appropriate code from Appendix B (see 1.2.9).

If it is desired to specify that finish shall be in accordance with MIL-E-16400, enter Code 1648 on the SRS followed by an "X". If Code 1648 is used, enter MIL-E-16400 on the SRS with an appropriate code from Appendix B (see 1.2.9).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

If it is desired to specify finish in accordance with Table II, the Finish Table, enter Code 1649 on the SRS followed by an "X". Also, enter the appropriate codes from the appropriate columns of Table II on the SRS, followed with the desired data to fill these columns. See 1.2.6 for additional instructions on use of codes from a table. The fills (desired data) for each of the above columns should be limited as follows:

Component - 15 spaces
Component Surface - 15 spaces
Finish - 30 spaces
Specification - 15 spaces
Class - 5 spaces
Type - 5 spaces
Grade - 5 spaces
Color - 10 spaces
Thickness (Maximum) - 8 spaces
Thickness (Minimum) - 8 spaces

If more than the allotted spaces are filled-in, the computer will print the information on additional lines in the allotted column.

An example of the use of codes from these columns of Table II is as follows:

CHAR CODE 13 14 15 16	VALUE 20 25 30 35 40
4541	ELEMENT#
4544	QQ-P-416#
4545	I#
4546	I#
4549	Φ.ΦΦΦ6Φ#
4550	Φ.ΦΦΦ5Φ#
6Φ96	QQ-P-416#

Source: https://assist.dla.mil -- Downloaded: 2026Ø10-26T07:24Z
Check the source to verify that this is the current version before use.

Note: If a specification(s) is referenced by using Code 4544, etc., the number of this document(s) must also be entered again on the SRS, using an appropriate code(s) from Appendix B (see 1.2.9).

1.2.26 Radiation Pattern

If the test procedure shown in the document referenced by using Code 1006 is sufficient, enter Code 1651 on the SRS followed by an "X".

If it is desired to take exception to the test procedure shown in the document referenced by using Code 1006, enter Code 1652 on the SRS and complete the sentence shown with Code 1652 in the SRL, using 189 characters or less including punctuation and spaces.

To specify that testing shall be performed in accordance with an existing document, enter Code 1653 on the SRS followed by the number of the document (see 1.2.9 for a list of applicable documents). If Code 1653 is used, the number of the document must also be entered again on the SRS with an appropriate code from Appendix B (see 1.2.9).

If the requirement shown in the document referenced by using Code 1006 is sufficient, enter Code 1660 on the SRS followed by an "X".

If it is desired to modify the requirement shown in the document referenced by using Code 1006, enter Code 1661 on the SRS and complete the sentence shown with Code 1661 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify the angle between the half power points of the maximum lobe, it is mandatory to enter Codes 1662 and 1663 on the SRS followed by the average value and the maximum value, respectively, in degrees.

If it is desired to specify beam tilt, enter Code 1664 and/or 1665 on the SRS followed by the average value and/or the maximum value, respectively, in degrees.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

If it is desired to specify that the horizontal pattern shall be omnidirectional to within ± _____ decibels, enter Code 1666 on the SRS followed by the allowable value in decibels.

If it is desired to specify that the ratio of the test unit power to a standard unit power shall be _____ db (minimum), enter Code 1667 on the SRS followed by the ratio in decibels. To specify E-Theta and/or E-Phi, enter Code 1668 and/or 1669, respectively, on the SRS followed by the value in microvolts/meter. To specify that nulls equal or exceed _____ db down from a point of maximum antenna response, enter Code 1670 on the SRS followed by the value in db. To specify the direct to reciprocal bearing error, enter Code 1671 on the SRS followed by the maximum allowable value in degrees. To specify that during flight testing of the antenna, the product of the RF signal in microvolts times the distance from the transmitter in nautical miles shall be _____, enter Code 1672 on the SRS followed by the value.

1.2.27 Gain

If the test procedure shown in the document referenced by using Code 1006 is sufficient, enter Code 1675 on the SRS followed by an "X".

If it is desired to take exception to the test procedure shown in the document referenced by using Code 1006, enter Code 1676 on the SRS and complete the sentence shown with Code 1676 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify that testing shall be in accordance with MIL-A-4946, enter Code 1677 on the SRS followed by an "X". If Code 1677 is used, enter MIL-A-4946 on the SRS with an appropriate code from Appendix B (see 1.2.9).

If it is desired to specify that testing shall be in accordance with MIL-A-6224, enter Code 1678 on the SRS followed by an "X". If Code 1678 is used, enter MIL-A-6224 on the SRS with an appropriate code from Appendix B (see 1.2.9).

If the requirement shown in the document referenced by using Code 1006 is sufficient, enter Code 1682 on the SRS followed by an "X".

If it is desired to modify the requirement shown in the document referenced by using Code 1006, enter Code 1683 on the SRS and complete the sentence shown with Code 1683 in the SRL, using 189 characters or less including punctuation and spaces.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

If it is desired to specify the requirement shown with Code 1684 in the SRL, enter Code 1684 on the SRS followed by the minimum allowable gain in decibels. If Code 1684 is used, it is mandatory to specify that the gain is with reference to linear polarization or circular polarization by entering Code 1685 or 1686, respectively, on the SRS followed by an "X".

If it is desired to specify the requirement shown with Code 1687 in the SRL, enter Code 1687 on the SRS followed by the minimum allowable value.

1.2.28 Insulation Resistance

If the test procedure shown in the document referenced by using Code 1006 is sufficient, enter Code 1370 on the SRS followed by an "X".

If it is desired to take exception to the test procedure shown in the document referenced by using Code 1006, enter Code 1371 on the SRS and complete the sentence shown with Code 1371 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify that testing shall be in accordance with MIL-A-18376, enter Code 1372 on the SRS followed by an "X". If Code 1372 is used, enter MIL-A-18376 on the SRS with an appropriate code from Appendix B (see 1.2.9).

If the requirement shown in the document referenced by using Code 1006 is sufficient, enter Code 1375 on the SRS followed by an "X".

If it is desired to modify the requirement shown in the document referenced by using Code 1006, enter Code 1376 on the SRS and complete the sentence shown with Code 1376 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify the requirement shown with Code 1377 in the SRL, enter Code 1377 on the SRS followed by the minimum allowable resistance in megohms.

1.2.29 Impedance

If the test procedure shown in the document referenced by using Code 1006 is sufficient, enter Code 1701 on the SRS followed by an "X".

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

If it is desired to take exception to the test procedure shown in the document referenced by using Code 1006, enter Code 1702 on the SRS and complete the sentence shown with Code 1702 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify that testing shall be in accordance with MIL-A-5815, enter Code 1703 on the SRS followed by an "X". If Code 1703 is used, enter MIL-A-5815 on the SRS with an appropriate code from Appendix B (see 1.2.9).

If it is desired to specify that testing shall be in accordance with MIL-A-4946, enter Code 1704 on the SRS followed by an "X". If Code 1704 is used, enter MIL-A-4946 on the SRS with an appropriate code from Appendix B (see 1.2.9).

If the requirement shown in the document referenced by using Code 1006 is sufficient, enter Code 1708 on the SRS followed by an "X".

If it is desired to modify the requirement shown in the document referenced by using Code 1006, enter Code 1709 on the SRS and complete the sentence shown with Code 1709 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify the requirement shown with Code 1710 in the SRL, enter Code 1710 on the SRS followed by the normal impedance of the antenna in ohms. If Code 1710 is used, it is mandatory to enter Codes 1711 and 1712 on the SRS followed by the lower frequency and the upper frequency, respectively, in megaHertz.

1.2.30 Voltage Standing Wave Ratio (VSWR)

If the test procedure shown in the document referenced by using Code 1006 is sufficient, enter Code 1716 on the SRS followed by an "X".

If it is desired to take exception to the test procedure shown in the document referenced by using Code 1006, enter Code 1717 on the SRS and complete the sentence shown with Code 1717 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify that testing shall be in accordance with the Slotted Line Method, enter Code 1718 on the SRS followed by an "X".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

If it is desired to specify that testing shall be in accordance with the UHF Bridge Method, enter Code 1719 on the SRS followed by an "X".

If it is desired to specify that testing shall be in accordance with the Admittance Method, enter Code 1720 on the SRS followed by an "X".

If it is desired to specify that VSWR testing shall be in accordance with a suitable method other than those shown with Codes 1716, 1717, 1718, 1719, and 1720, enter Code 1721 on the SRS followed by an "X".

If the requirement shown in the document referenced by using Code 1006 is sufficient, enter Code 1725 on the SRS followed by an "X".

If it is desired to modify the requirement shown in the document referenced by using Code 1006, enter Code 1726 on the SRS and complete the sentence shown with Code 1726 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify the maximum VSWR, enter Code 1727 on the SRS followed by the maximum allowable VSWR. If Code 1727 is used, it is mandatory to enter Codes 1728 and 1729 on the SRS followed by the lower frequency and the upper frequency, respectively, in mega-Hertz.

1.2.31 Power Capability

If the test procedure shown in the document referenced by using Code 1006 is sufficient, enter Code 1733 on the SRS followed by an "X".

If it is desired to take exception to the test procedure shown in the document referenced by using Code 1006, enter Code 1734 on the SRS and complete the sentence shown with Code 1734 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify that testing shall be in accordance with MIL-A-55101, enter Code 1735 on the SRS followed by an "X". If Code 1735 is used, enter MIL-A-55101 on the SRS with an appropriate code from Appendix B (see 1.2.9). If Code 1735 is used, it is possible

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

to specify the rf power, the test duration, the measurement interval and the test altitude. To specify the rf power, enter Code 1736 on the SRS followed by the nominal value in watts. To specify the test duration, enter Code 1737 on the SRS followed by the nominal value in minutes. To specify the measurement interval, enter Code 1738 on the SRS followed by the nominal value in minutes. To specify the test altitude, enter Code 1739 on the SRS followed by the nominal value in feet above sea level.

If the requirement shown in the document referenced by using Code 1006 is sufficient, enter Code 1743 on the SRS followed by an "X".

If it is desired to modify the requirement shown in the document referenced by using Code 1006, enter Code 1744 on the SRS and complete the sentence shown with Code 1744 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify the requirement shown with Code 1745 in the SRL, enter Code 1745 on the SRS followed by an "X". If it is desired to specify the requirement shown with Code 1746 in the SRL, enter Code 1746 on the SRS followed by the maximum allowable value in percent.

1.2.32 Radio Interference

If the test procedure shown in the document referenced by using Code 1006 is sufficient, enter Code 1750 on the SRS followed by an "X".

If it is desired to take exception to the test procedure shown in the document referenced by using Code 1006, enter Code 1751 on the SRS and complete the sentence shown with Code 1751 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify that testing shall be in accordance with MIL-I-6051, enter Code 1752 on the SRS followed by an "X". If Code 1752 is used, enter MIL-I-6051 on the SRS with an appropriate code from Appendix B (see 1.2.9).

If the requirement shown in the document referenced by using Code 1006 is sufficient, enter Code 1755 on the SRS followed by an "X".

If it is desired to modify the requirement shown in the document referenced by using Code 1006, enter Code 1756 on the SRS and complete the sentence shown with Code 1756 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify the requirement shown with Code 1757 in the SRL, enter Code 1757 on the SRS followed by an "X".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.33 Continuity

If the test procedure shown in the document referenced by using Code 1006 is sufficient, enter Code 1761 on the SRS followed by an "X".

If it is desired to take exception to the test procedure shown in the document referenced by using Code 1006, enter Code 1762 on the SRS and complete the sentence shown with Code 1762 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify that testing shall be in accordance with MIL-A-4946, enter Code 1763 on the SRS followed by an "X". If Code 1763 is used, enter MIL-A-4946 on the SRS with an appropriate code from Appendix B (see 1.2.9).

If the requirement shown in the document referenced by using Code 1006 is sufficient, enter Code 1767 on the SRS followed by an "X".

If it is desired to modify the requirement shown in the document referenced by using Code 1006, enter Code 1768 on the SRS and complete the sentence shown with Code 1768 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify the requirement shown with Code 1769 in the SRL, enter Code 1769 on the SRS followed by an "X".

1.2.34 Feed System Efficiency

If the test procedure shown in the document referenced by using Code 1006 is sufficient, enter Code 1772 on the SRS followed by an "X".

If it is desired to take exception to the test procedure shown in the document referenced by using Code 1006, enter Code 1773 on the SRS and complete the sentence shown with Code 1773 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify that testing shall be in accordance with MIL-A-55101, enter Code 1774 on the SRS followed by an "X". If Code 1774 is used, enter MIL-A-55101 on the SRS with an appropriate code from Appendix B (see 1.2.9).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

If the requirement shown in the document referenced by using Code 1006 is sufficient, enter Code 1777 on the SRS followed by an "X".

If it is desired to modify the requirement shown in the document referenced by using Code 1006, enter Code 1778 on the SRS and complete the sentence shown with Code 1778 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify requirements in accordance with MIL-A-55101, enter Code 1779 on the SRS followed by an "X". If Code 1779 is used, enter MIL-A-55101 on the SRS with an appropriate code from Appendix B (see 1.2.9).

1.2.35 Admittance

If the test procedure shown in the document referenced by using Code 1006 is sufficient, enter Code 1783 on the SRS followed by an "X".

If it is desired to take exception to the test procedure shown in the document referenced by using Code 1006, enter Code 1784 on the SRS and complete the sentence shown with Code 1784 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify that testing shall be in accordance with MIL-A-55101, enter Code 1785 on the SRS followed by an "X". If Code 1785 is used, enter MIL-A-55101 on the SRS with an appropriate code from Appendix B (see 1.2.9).

If the requirement shown in the document referenced by using Code 1006 is sufficient, enter Code 1789 on the SRS followed by an "X".

If it is desired to modify the requirement shown in the document referenced by using Code 1006, enter Code 1790 on the SRS and complete the sentence shown with Code 1790 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify requirements in accordance with MIL-A-55101, enter Code 1791 on the SRS followed by an "X". If Code 1791 is used, enter MIL-A-55101 on the SRS with an appropriate code from Appendix B (see 1.2.9). To specify the admittance requirement, enter Code 1792 on the SRS followed by the value in mhos.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.36 Orientation

If the test procedure shown in the document referenced by using Code 1006 is sufficient, enter Code 1795 on the SRS followed by an "X".

If it is desired to take exception to the test procedure shown in the document referenced by using Code 1006, enter Code 1796 on the SRS and complete the sentence shown with Code 1796 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify that testing shall be in accordance with MIL-A-55101, enter Code 1797 on the SRS followed by an "X". If Code 1797 is used, enter MIL-A-55101 on the SRS with an appropriate code from Appendix B (see 1.2.9).

If Code 1797 is used, it is possible to specify the plane of inclination as forward, backward, left and/or right by entering Codes 1798, 1799, 1800 and/or 1801, respectively, on the SRS followed by an "X". If Code 1797 is used, it is possible to specify one or both of the test parameters shown with Codes 1802 and 1803 in the SRL by entering the appropriate code(s) on the SRS followed by the appropriate data. If Code 1803 is used, it is mandatory to specify the tolerance by entering Code 1804 on the SRS followed by the value in degrees.

If the requirement shown in the document referenced by using Code 1006 is sufficient, enter Code 1807 on the SRS followed by an "X".

If it is desired to modify the requirement shown in the document referenced by using Code 1006, enter Code 1808 on the SRS and complete the sentence shown with Code 1808 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify the requirement shown with Code 1809 in the SRL, enter Code 1809 on the SRS followed by an "X".

1.2.37 Flight Test

If the test procedure shown in the document referenced by using Code 1006 is sufficient, enter Code 1812 on the SRS followed by an "X".

If it is desired to take exception to the test procedure shown in the document referenced by using Code 1006, enter Code 1813 on the SRS and complete the sentence shown with Code 1813 in the SRL, using 189 characters or less including punctuation and spaces.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

If it is desired to specify that testing shall be in accordance with Flight Plan 1 of MIL-A-6300, enter Code 1814 on the SRS followed by an "X". If Code 1814 is used, enter MIL-A-6300 on the SRS with an appropriate code from Appendix B (see 1.2.9).

If it is desired to specify that testing shall be in accordance with Flight Plan 2 of MIL-A-6300, enter Code 1815 on the SRS followed by an "X". If Code 1815 is used, enter MIL-A-6300 on the SRS with an appropriate code from Appendix B (see 1.2.9).

If the requirement shown in the document referenced by using Code 1006 is sufficient, enter Code 1819 on the SRS followed by an "X".

If it is desired to modify the requirement shown in the document referenced by using Code 1006, enter Code 1820 on the SRS and complete the sentence shown with Code 1820 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify the requirement shown with Code 1821 in the SRL, enter Code 1821 on the SRS followed by an "X". If Code 1821 is used, enter MIL-A-6300 on the SRS with an appropriate code from Appendix B (see 1.2.9).

1.2.38 Impact

If the test procedure shown in the document referenced by using Code 1006 is sufficient, enter Code 1825 on the SRS followed by an "X".

If it is desired to take exception to the test procedure shown in the document referenced by using Code 1006, enter Code 1826 on the SRS and complete the sentence shown with Code 1826 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify that testing shall be in accordance with MIL-A-55101, enter Code 1827 on the SRS followed by an "X". If Code 1827 is used, enter MIL-A-55101 on the SRS with an appropriate code from Appendix B (see 1.2.9).

If the requirement shown in the document referenced by using Code 1006 is sufficient, enter Code 1831 on the SRS followed by an "X".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

If it is desired to modify the requirement shown in the document referenced by using Code 1006, enter Code 1832 on the SRS and complete the sentence shown with Code 1832 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify one or both of the requirements shown with Codes 1833 and 1834 in the SRL, enter the appropriate code(s) on the SRS followed by an "X".

1.2.39 Air-Seal

If the test procedure shown in the document referenced by using Code 1006 is sufficient, enter Code 1838 on the SRS followed by an "X".

If it is desired to take exception to the test procedure shown in the document referenced by using Code 1006, enter Code 1839 on the SRS and complete the sentence shown with Code 1839 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify that testing shall be in accordance with MIL-A-55101, enter Code 1840 on the SRS followed by an "X". If Code 1840 is used, enter MIL-A-55101 on the SRS with an appropriate code from Appendix B (see 1.2.9).

If it is desired to specify that testing shall be in accordance with MIL-A-5815, enter Code 1841 on the SRS followed by an "X". If Code 1841 is used, enter MIL-A-5815 on the SRS with an appropriate code from Appendix B (see 1.2.9).

If the requirement shown in the document referenced by using Code 1006 is sufficient, enter Code 1843 on the SRS followed by an "X".

If it is desired to modify the requirement shown in the document referenced by using Code 1006, enter Code 1844 on the SRS and complete the sentence shown with Code 1844 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify the requirement shown with Code 1845 in the SRL, enter Code 1845 on the SRS followed by the maximum allowable decrease in vacuum in pounds per square inch, gauge, per minute. If it is desired to specify the requirement shown with Code 1846 in the SRL, enter Code 1846 on the SRS followed by an "X". If Code 1846 is used, enter MIL-A-5815 on the SRS with an appropriate code from Appendix B (see 1.2.9).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.40 Leakage

If the test procedure shown in the document referenced by using Code 1006 is sufficient, enter Code 1849 on the SRS followed by an "X".

If it is desired to take exception to the test procedure shown in the document referenced by using Code 1006, enter Code 1850 on the SRS and complete the sentence shown with Code 1850 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify that testing shall be in accordance with MIL-STD-810, Method 512, Procedure 1, enter Code 1851 on the SRS followed by an "X". If Code 1851 is used, enter MIL-STD-810 on the SRS with an appropriate code from Appendix B (see 1.2.9).

If Code 1851 is used, it is possible to specify testing in accordance with one or more of the test parameters shown with Codes 1852, 1854 and 1856 in the SRL by entering the appropriate code(s) on the SRS followed by the appropriate data. If Code 1852, 1854 or 1856 is used, it is mandatory to specify the tolerance by using Codes 1853, 1855, and 1857, respectively.

If the requirement shown in the document referenced by using Code 1006 is sufficient, enter Code 1858 on the SRS followed by an "X".

If it is desired to modify the requirement shown in the document referenced by using Code 1006, enter Code 1859 on the SRS and complete the sentence shown with Code 1859 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify the requirement shown with Code 1860 in the SRL, enter Code 1860 on the SRS followed by an "X".

1.2.41 Bounce

If the test procedure shown in the document referenced by using Code 1006 is sufficient, enter Code 1864 on the SRS followed by an "X".

If it is desired to take exception to the test procedure shown in the document referenced by using Code 1006, enter Code 1865 on the SRS and complete the sentence shown with Code 1865 in the SRL, using 189 characters or less including punctuation and spaces.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

If it is desired to specify that testing shall be in accordance with MIL-A-55101, enter Code 1866 on the SRS followed by an "X". If Code 1866 is used, enter MIL-A-55101 on the SRS with an appropriate code from Appendix B (see 1.2.9).

If the requirement shown in the document referenced by using Code 1006 is sufficient, enter Code 1870 on the SRS followed by an "X".

If it is desired to modify the requirement shown in the document referenced by using Code 1006, enter Code 1871 on the SRS and complete the sentence shown with Code 1871 in the SRL, using 189 characters or less including punctuation and spaces.

To specify that there shall be no physical damage to the antenna, enter Code 1872 on the SRS followed by an "X".

To specify that after the bounce test, the antenna shall meet the performance requirements of the VSWR test (see 1.2.30), the power capability test (see 1.2.31), the feed system efficiency test (see 1.2.34) and/or the admittance test (see 1.2.35), enter Code 1873, 1874, 1875 and/or 1876, respectively, on the SRS followed by an "X".

1.2.42 Flexural Strength

If the test procedure shown in the document referenced by using Code 1006 is sufficient, enter Code 1877 on the SRS followed by an "X".

If it is desired to take exception to the test procedure shown in the document referenced by using Code 1006, enter Code 1878 on the SRS and complete the sentence shown with Code 1878 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify that testing shall be in accordance with MIL-A-55101, enter Code 1879 on the SRS followed by an "X". If Code 1879 is used, enter MIL-A-55101 on the SRS with an appropriate code from Appendix B (see 1.2.9).

If the requirement shown in the document referenced by using Code 1006 is sufficient, enter Code 1883 on the SRS followed by an "X".

If it is desired to modify the requirement shown in the document referenced by using Code 1006, enter Code 1884 on the SRS and complete the sentence shown with Code 1884 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify the requirement shown with Code 1885 in the SRL, enter Code 1885 on the SRS followed by an "X".

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.43 Static Load

If the test procedure shown in the document referenced by using Code 1006 is sufficient, enter Code 1889 on the SRS followed by an "X".

If it is desired to take exception to the test procedure shown in the document referenced by using Code 1006, enter Code 1890 on the SRS and complete the sentence shown with Code 1890 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify that testing shall be in accordance with MIL-A-5815, enter Codes 1892 and 1893 on the SRS followed by the appropriate data required to specify the required loads. To specify the load parallel to the major axis, enter Code 1892 on the SRS followed by the nominal value in pounds. To specify the load parallel to the minor axis, enter Code 1893 on the SRS followed by the nominal value in pounds. If Codes 1892 and 1893 are used, enter MIL-A-5815 on the SRS with an appropriate code from Appendix B (see 1.2.9).

If it is desired to specify that testing shall be in accordance with MIL-A-18376, enter Code 1894 on the SRS followed by an "X". If Code 1894 is used, enter MIL-A-18376 on the SRS with an appropriate code from Appendix B (see 1.2.9). If Code 1894 is used, it is possible to specify the ultimate design load by entering Code 1895 on the SRS followed by the desired value in pounds per square inch.

If the requirement shown in the document referenced by using Code 1006 is sufficient, enter Code 1899 on the SRS followed by an "X".

If it is desired to modify the requirement shown in the document referenced by using Code 1006, enter Code 1900 on the SRS and complete the sentence shown with Code 1900 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify the requirement shown with Code 1901 in the SRL, enter Code 1901 on the SRS followed by an "X".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.44 Altitude

If the test procedure shown in the document referenced by using Code 1006 is sufficient, enter Code 1905 on the SRS followed by an "X".

If it is desired to take exception to the test procedure shown in the document referenced by using Code 1006, enter Code 1906 on the SRS and complete the sentence shown with Code 1906 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify that testing shall be in accordance with MIL-STD-810, Method 500, enter Code 1907 on the SRS followed by the procedure number or title. If Code 1907 is used, enter MIL-STD-810 on the SRS with an appropriate code from Appendix B (see 1.2.9). If Procedure II is selected, enter Code 1908 on the SRS followed by the lowest operating temperature in degrees C. If Code 1908 is used, it is mandatory to specify tolerance by entering Code 1909 on the SRS followed by the tolerance in degrees C. To specify the lowest operating pressure, enter Code 1910 on the SRS followed by the value in inches of Hg. To specify the rate of pressure change, enter Code 1911 on the SRS followed by the value in inches of Hg/minute. To specify the duration of the reduced pressure condition, enter Code 1912 on the SRS followed by the value in minutes.

If the requirement shown in the document referenced by using Code 1006 is sufficient, enter Code 1914 on the SRS followed by an "X".

If it is desired to modify the requirement shown in the document referenced by using Code 1006, enter Code 1915 on the SRS and complete the sentence shown with Code 1915 in the SRL, using 189 characters or less including punctuation and spaces.

To specify the requirement shown with Code 1916 in the SRL, enter Code 1916 on the SRS followed by an "X". To specify that the antenna shall meet the performance requirements of the VSWR test (see 1.2.30) before, during and after the altitude test, enter Codes 1917, 1918 and/or 1919, respectively, on the SRS followed by an "X".

1.2.45 Wind

If the test procedure shown in the document referenced by using Code 1006 is sufficient, enter Code 1921 on the SRS followed by an "X".

If it is desired to take exception to the test procedure shown in the document referenced by using Code 1006, enter Code 1922 on the SRS and complete the sentence shown with Code 1922 in the SRL, using 189 characters or less including punctuation and spaces.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

If it is desired to specify that testing shall be in accordance with MIL-A-4946, enter Code 1923 on the SRS followed by an "X". If Code 1923 is used, enter MIL-A-4946 on the SRS with an appropriate code from Appendix B (see 1.2.9).

If the requirement shown in the document referenced by using Code 1006 is sufficient, enter Code 1927 on the SRS followed by an "X".

If it is desired to modify the requirement shown in the document referenced by using Code 1006, enter Code 1928 on the SRS and complete the sentence shown with Code 1928 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify the requirement shown with Code 1929 in the SRL, enter Code 1929 on the SRS followed by an "X".

1.2.46 Ice

If the test procedure shown in the document referenced by using Code 1006 is sufficient, enter Code 1933 on the SRS followed by an "X".

If it is desired to take exception to the test procedure shown in the document referenced by using Code 1006, enter Code 1934 on the SRS and complete the sentence shown with Code 1934 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify that testing shall be in accordance with MIL-A-4946, enter Code 1935 on the SRS followed by an "X". If Code 1935 is used, enter MIL-A-4946 on the SRS with an appropriate code from Appendix B (see 1.2.9).

If the requirement shown in the document referenced by using Code 1006 is sufficient, enter Code 1939 on the SRS followed by an "X".

If it is desired to modify the requirement shown in the document referenced by using Code 1006, enter Code 1940 on the SRS and complete the sentence shown with Code 1940 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify the requirement shown with Code 1941 in the SRL, enter Code 1941 on the SRS followed by an "X".

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.47 Sand and Dust

If the test procedure shown in the document referenced by using Code 1006 is sufficient, enter Code 1945 on the SRS followed by an "X".

If it is desired to take exception to the test procedure shown in the document referenced by using Code 1006, enter Code 1946 on the SRS and complete the sentence shown with Code 1946 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify that testing shall be in accordance with MIL-STD-810, Method 510, Procedure 1, enter Code 1947 on the SRS followed by an "X". If Code 1947 is used, enter MIL-STD-810 on the SRS with an appropriate code from Appendix B (see 1.2.9). If Code 1947 is used, it is possible to specify one or more of the test parameters shown with Codes 1948, 1949, 1951, 1952, 1953, 1954, and 1956 in the SRL by entering the appropriate code(s) on the SRS followed by the appropriate data. If Code 1949 and/or 1954 is used, it is mandatory to specify the tolerance by using Code 1950 and/or 1955, respectively.

If the requirement shown in the document referenced by using Code 1006 is sufficient, enter Code 1958 on the SRS followed by an "X".

If it is desired to modify the requirement shown in the document referenced by using Code 1006, enter Code 1959 on the SRS and complete the sentence shown with Code 1959 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify one or both of the requirements shown with Codes 1960 and 1961 in the SRL, enter the appropriate code(s) on the SRS followed by an "X".

1.2.48 Rain

If the test procedure shown in the document referenced by using Code 1006 is sufficient, enter Code 1965 on the SRS followed by an "X".

If it is desired to take exception to the test procedure shown in the document referenced by using Code 1006, enter Code 1966 on the SRS and complete the sentence shown with Code 1966 in the SRL, using 189 characters or less including punctuation and spaces.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

If it is desired to specify that testing shall be in accordance with MIL-STD-810, Method 506, Procedure 1, it is mandatory to enter Codes 1967 or 1968 and 1969 on the SRS followed by the appropriate data. To specify the power to be applied during the test, enter Code 1967 or 1968 on the SRS followed by the power in kilowatts or the voltage in volts, respectively. To specify the duration of the applied power, enter Code 1969 on the SRS followed by the value in minutes. If Codes 1967 or 1968 and 1969 are used, enter MIL-STD-810 on the SRS with an appropriate code from Appendix B (see 1.2.9).

If the requirement shown in the document referenced by using Code 1006 is sufficient, enter Code 1970 on the SRS followed by an "X".

If it is desired to modify the requirement shown in the docume referenced by using Code 1006, enter Code 1971 on the SRS and complete the sentence shown with Code 1971 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify one or both of the requirements shown with Codes 1972 and 1973 in the SRL, enter the appropriate codes on the SRS followed by an "X".

1.2.49 High Temperature

If the test procedure shown in the document referenced by using Code 1006 is sufficient, enter Code 1975 on the SRS followed by an "X".

If it is desired to take exception to the test procedure shown in the document referenced by using Code 1006, enter Code 1976 on the SRS and complete the sentence shown with Code 1976 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify that testing shall be in accordance with MIL-STD-810, Method 501, it is mandatory to enter Code 1977 on the SRS followed by the procedure number or title. If Code 1977 is used, enter MIL-STD-810 on the SRS with an appropriate code from Appendix B (see 1.2.9). If Code 1977 is used, it is mandatory to enter Codes 1978 and 1980 on the SRS followed by the storage temperature and the operating temperature, respectively, in degrees C. It is also mandatory to specify the tolerance by using Codes 1979 and 1981.

If it is desired to specify that testing shall be in accordance with MIL-E-16400, enter Code 1982 on the SRS followed by an "X". If Code 1982 is used, enter MIL-E-16400 on the SRS with an appropriate code from Appendix B (see 1.2.9).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

If it is desired to specify that testing shall be in accordance with MIL-STD-169, enter Code 1983 on the SRS followed by an "X". If Code 1983 is used, enter MIL-STD-169 on the SRS with an appropriate code from Appendix B (see 1.2.9).

If the requirement shown in the document referenced by using Code 1006 is sufficient, enter Code 1985 on the SRS followed by an "X".

If it is desired to modify the requirement shown in the document referenced by using Code 1006, enter Code 1986 on the SRS and complete the sentence shown with Code 1986 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify one or both of the requirements shown with Codes 1987 and 1988 in the SRL, enter the appropriate code(s) on the SRS followed by an "X".

1.2.50 Low Temperature

If the test procedure shown in the document referenced by using Code 1006 is sufficient, enter Code 1991 on the SRS followed by an "X".

If it is desired to take exception to the test procedure shown in the document referenced by using Code 1006, enter Code 1992 on the SRS and complete the sentence shown with Code 1992 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify that testing shall be in accordance with MIL-STD-810, Method 502, Procedure 1, it is mandatory to enter Codes 1994 and 1996 on the SRS followed by the storage temperature and the operating temperature, respectively, in degrees C. It is also mandatory to specify the tolerance by using Codes 1995 and 1997. If Codes 1994 and 1996 are used, enter MIL-STD-810 on the SRS with an appropriate code from Appendix B (see 1.2.9).

If it is desired to specify that testing shall be in accordance with MIL-E-16400, enter Code 1998 on the SRS followed by an "X". If Code 1998 is used, enter MIL-E-16400 on the SRS with an appropriate code from Appendix B (see 1.2.9).

If it is desired to specify that testing shall be in accordance with MIL-STD-169, enter Code 1999 on the SRS followed by an "X". If Code 1999 is used, enter MIL-STD-169 on the SRS with an appropriate code from Appendix B (see 1.2.9).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

If the requirement shown in the document referenced by using Code 1006 is sufficient, enter Code 2000 on the SRS followed by an "X".

If it is desired to modify the requirement shown in the document referenced by using Code 1006, enter Code 2001 on the SRS and complete the sentence shown with Code 2001 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify one or both of the requirements shown with Codes 2002 and 2003 in the SRL, enter the appropriate code on the SRS followed by an "X".

1.2.51 Thermal Shock

If the test procedure shown in the document referenced by using Code 1006 is sufficient, enter Code 4712 on the SRS followed by an "X".

If it is desired to take exception to the test procedure shown in the document referenced by using Code 1006, enter Code 4713 on the SRS and complete the sentence shown with Code 4713 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify that testing shall be in accordance with MIL-STD-810, Method 503, Procedure 1, enter Code 4714 on the SRS followed by an "X". If Code 4714 is used, enter MIL-STD-810 on the SRS with an appropriate code from Appendix B (see 1.2.9).

If it is desired to specify that testing shall be in accordance with MIL-A-6224, enter Code 4715 on the SRS followed by an "X". If Code 4715 is used, enter MIL-A-6224 on the SRS with an appropriate code from Appendix B (see 1.2.9).

If the requirement shown in the document referenced by using Code 1006 is sufficient, enter Code 4719 on the SRS followed by an "X".

If it is desired to modify the requirement shown in the document referenced by using Code 1006, enter Code 4720 on the SRS and complete the sentence shown with Code 4720 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify one or both of the requirements shown with Codes 4722 and 4723 in the SRL, enter the appropriate code(s) on the SRS followed by an "X".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.52 Shock

If the test procedure shown in the document referenced by using Code 1006 is sufficient, enter Code 1494 on the SRS followed by an "X".

If it is desired to take exception to the test procedure shown in the document referenced by using Code 1006, enter Code 1495 on the SRS and complete the sentence shown with Code 1495 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify that testing shall be in accordance with MIL-STD-810, Method 516, enter Code 1498 on the SRS followed by the procedure number. If Code 1498 is used, enter MIL-STD-810 on the SRS with an appropriate code from Appendix B (see 1.2.9). If Code 1498 is used, it is mandatory to specify the shock pulse figure number, the peak amplitude and the pulse duration by entering Codes 1499, 1500, and 1501 on the SRS followed by the figure number, the peak amplitude in G's and the pulse duration in milliseconds, respectively.

If it is desired to specify that testing shall be in accordance with MIL-S-901, enter Code 1502 on the SRS followed by an "X". If Code 1502 is used, enter MIL-S-901 on the SRS with an appropriate code from Appendix B (see 1.2.9). If Code 1502 is used, it is possible to specify the grade, class, type, equipment classification and test classification by use of Codes 1503, 1504, 1505, 1506 and 1507, respectively.

If the requirement shown in the document referenced by using Code 1006 is sufficient, enter Code 1510 on the SRS followed by an "X".

If it is desired to modify the requirement shown in the document referenced by using Code 1006, enter Code 1511 on the SRS and complete the sentence shown with Code 1511 in the SRL, using 189 characters or less including punctuation and spaces.

To specify that there shall be no physical damage, enter Code 1512 on the SRS followed by an "X".

To specify that the shock test shall have no significant effect on performance, enter Code 1513 on the SRS followed by an "X".

To specify that after the shock test, the antenna shall meet the performance requirements of the VSWR test (see 1.2.30), the power capability test (see 1.2.31), the feed system efficiency test (see 1.2.34) and/or the admittance test (see 1.2.35), enter Code 1514, 1515, 1516 and/or 1517, respectively, on the SRS followed by an "X".

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.53 Fungus Resistance

If the test procedure shown in the document referenced by using Code 1006 is sufficient, enter Code 4753 on the SRS followed by an "X".

If it is desired to take exception to the test procedure shown in the document referenced by using Code 1006, enter Code 4754 on the SRS and complete the sentence shown with Code 4754 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify that testing shall be in accordance with MIL-STD-810, Method 508, Procedure 1, enter Code 4755 on the SRS followed by an "X". If Code 4755 is used, enter MIL-STD-810 on the SRS with an appropriate code from Appendix B (see 1.2.9). If Code 4755 is used, it is possible to specify the test period by entering Code 4756 on the SRS followed by the value in days.

If the requirement shown in the document referenced by using Code 1006 is sufficient, enter Code 4759 on the SRS followed by an "X".

If it is desired to modify the requirement shown in the document referenced by using Code 1006, enter Code 4760 on the SRS and complete the sentence shown with Code 4760 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify the requirement shown with Code 4761 in the SRL, enter Code 4761 on the SRS followed by an "X".

If it is desired to permit the supplier to certify compliance with the fungus resistance requirements in lieu of testing, enter Code 4762 on the SRS followed by an "X".

1.2.54 Salt Fog

If the test procedure shown in the document referenced by using Code 1006 is sufficient, enter Code 4769 on the SRS followed by an "X".

If it is desired to take exception to the test procedure shown in the document referenced by using Code 1006, enter Code 4770 on the SRS and complete the sentence shown with Code 4770 in the SRL, using 189 characters or less including punctuation and spaces.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

If it is desired to specify that testing shall be in accordance with MIL-STD-810, Method 509, Procedure 1, enter Code 4771 on the SRS followed by an "X". If Code 4771 is used, enter MIL-STD-810 on the SRS with an appropriate code from Appendix B (see 1.2.9). If Code 4771 is used, it is possible to specify the salt solution, exposure time, and the drying period by entering Codes 4772, 4773 and 4774, respectively, on the SRS followed by the appropriate data.

If the requirement shown in the document referenced by using Code 1006 is sufficient, enter Code 4775 on the SRS followed by an "X".

If it is desired to modify the requirement shown in the document referenced by using Code 1006, enter Code 4776 on the SRS and complete the sentence shown with Code 4776 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify one or both of the requirements shown with Codes 4777 and 4778 in the SRL, enter the appropriate code(s) on the SRS followed by an "X".

1.2.55 Humidity

If the test procedure shown in the document referenced by using Code 1006 is sufficient, enter Code 4787 on the SRS followed by an "X".

If it is desired to take exception to the test procedure shown in the document referenced by using Code 1006, enter Code 4788 on the SRS and complete the sentence shown with Code 4788 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify that testing shall be in accordance with MIL-STD-810, Method 507, Procedure ___, enter Code 4789 on the SRS followed by the procedure number. If Code 4789 is used, enter MIL-STD-810 on the SRS with an appropriate code from Appendix B (see 1.2.9).

To specify that testing shall be in accordance with MIL-E-16400, enter Code 4791 on the SRS followed by an "X". If Code 4791 is used, enter MIL-E-16400 on the SRS with an appropriate code from Appendix B (see 1.2.9).

If the requirement shown in the document referenced by using Code 1006 is sufficient, enter Code 4794 on the SRS followed by an "X".

If it is desired to modify the requirement shown in the document referenced by using Code 1006, enter Code 4795 on the SRS and complete the sentence shown with Code 4795 in the SRL, using 189 characters or less including punctuation and spaces.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

If it is desired to specify one or both of the requirements shown with Codes 4796 and 4797 in the SRL, enter the appropriate code(s) on the SRS followed by an "X".

1.2.56 Moisture Resistance

If the test procedure shown in the document referenced by using Code 1006 is sufficient, enter Code 1390 on the SRS followed by an "X".

If it is desired to take exception to the test procedure shown in the document referenced by using Code 1006, enter Code 1391 on the SRS and complete the sentence shown with Code 1391 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify that testing shall be in accordance with MIL-STD-202, Method 106, it is mandatory to enter Code 1392 on the SRS followed by the loading voltage in volts DC. If Code 1392 is used, enter MIL-STD-202 on the SRS with an appropriate code from Appendix B (see 1.2.9).

If it is desired to specify that testing shall be in accordance with MIL-STD-170, enter Code 1396 on the SRS followed by an "X". If Code 1396 is used, enter MIL-STD-170 on the SRS with an appropriate code from Appendix B (see 1.2.9).

If the requirement shown in the document referenced by using Code 1006 is sufficient, enter Code 1399 on the SRS followed by an "X".

If it is desired to modify the requirement shown in the document referenced by using Code 1006, enter Code 1400 on the SRS and complete the sentence shown with Code 1400 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify the requirement shown with Code 1401 in the SRL, enter Code 1401 on the SRS followed by an "X".

To specify that during and after the moisture resistance test, the antenna shall meet the performance requirements of the VSWR test (see 1.2.30), the power capability test (see 1.2.31), the feed system efficiency test (see 1.2.34) and/or the admittance test (see 1.2.35), enter Code 1402, 1403, 1404 and/or 1405, respectively, on the SRS followed by an "X".

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

1.2.57 Random Vibration

If the test procedure shown in the document referenced by using Code 1006 is sufficient, enter Code 1425 on the SRS followed by an "X".

If it is desired to take exception to the test procedure shown in the document referenced by using Code 1006, enter Code 1426 on the SRS and complete the sentence shown with Code 1426 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify that testing shall be in accordance with MIL-STD-810, Method 514, Procedure _____, enter Code 1427 on the SRS followed by the procedure number. (Select Procedure II through VII as applicable.) If Code 1427 is used, enter MIL-STD-810 on the SRS with an appropriate code from Appendix B (see 1.2.9). If Code 1427 is used, it is mandatory to enter Codes 1428, 1429, and 1431 on the SRS followed by the appropriate data. It is also mandatory to specify the tolerance by entering Code 1430 on the SRS followed by the tolerance in degrees C.

If it is desired to specify that testing shall be in accordance with MIL-STD-167, Type 1, enter Code 1434 on the SRS followed by an "X". If Code 1434 is used, enter MIL-STD-167 on the SRS with an appropriate code from Appendix B (see 1.2.9).

If the requirement shown in the document referenced by using Code 1006 is sufficient, enter Code 1436 on the SRS followed by an "X".

If it is desired to modify the requirement shown in the document referenced by using Code 1006, enter Code 1437 on the SRS and complete the sentence shown with Code 1437 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify the requirement shown with Code 1438 in the SRL, enter Code 1438 on the SRS followed by an "X".

1.2.58 High Frequency Vibration

If the test procedure shown in the document referenced by using Code 1006 is sufficient, enter Code 1441 on the SRS followed by an "X".

If it is desired to take exception to the test procedure shown in the document referenced by using Code 1006, enter Code 1442 on the SRS and complete the sentence shown with Code 1442 in the SRL, using 189 characters or less including punctuation and spaces.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

If it is desired to specify that testing shall be in accordance with Method 204 of MIL-STD-202, enter Code 1443 on the SRS followed by the test condition letter. If Code 1443 is used, enter MIL-STD-202 on the SRS with an appropriate code from Appendix B (see 1.2.9). If Code 1443 is used, it is possible to specify the method of mounting the test specimen by using Code 1444, 1445, or 1446 followed by the appropriate SRS entry. If Code 1443 is used, the electrical load may be specified by entering Code 1447 on the SRS followed by the desired value in ohms. If Code 1443 is used, it is possible to specify the method of determining mechanical resonance by entering Code 1448 or 1449, as appropriate, on the SRS followed by an "X".

If the requirement shown in the document referenced by using Code 1006 is sufficient, enter Code 1450 on the SRS followed by an "X".

If it is desired to modify the requirement shown in the document referenced by using Code 1006, enter Code 1451 on the SRS and complete the sentence shown with Code 1451 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify the insulation resistance, enter Code 1452 on the SRS followed by the minimum allowable insulation resistance in megohms. If it is desired to specify the requirement shown with Code 1453 in the SRL, enter Code 1453 on the SRS followed by an "X". If it is desired to specify the power handling capability, enter Code 1454 on the SRS followed by the nominal power handling capability in watts. If it is desired to specify the requirement shown with Code 1455 in the SRL, enter Code 1455 on the SRS followed by an "X".

1.2.59 Low Frequency Vibration

If the test procedure shown in the document referenced by using Code 1006 is sufficient, enter Code 1456 on the SRS followed by an "X".

If it is desired to take exception to the test procedure shown in the document referenced by using Code 1006, enter Code 1457 on the SRS and complete the sentence shown with Code 1457 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify that testing shall be in accordance with Method 201 of MIL-STD-202, enter Code 1458 on the SRS followed by the duration of application per axis in hours. If Code 1458 is used, enter MIL-STD-202 on the SRS with an appropriate code from Appendix B (see 1.2.9). If Code 1458 is used, it is possible to specify the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

number of axes, the method of mounting, the direction of motion, and the electrical load. To specify the number of axes, enter Code 1459 on the SRS followed by the number. To specify the method of mounting, enter Code 1460, 1461, or 1462 on the SRS followed by the appropriate SRS entry. To specify the direction of motion, enter Code 1463, 1464, 1465 or 1466 on the SRS followed by the appropriate SRS entry. (See 1.2.9 if Code 1466 is used.) To specify the electrical load, enter Code 1467 on the SRS followed by the desired value in ohms.

If the requirement shown in the document referenced by using Code 1006 is sufficient, enter Code 1468 on the SRS followed by an "X".

If it is desired to modify the requirement shown in the document referenced by using Code 1006, enter Code 1469 on the SRS and complete the sentence shown with Code 1469 in the SRL, using 189 characters or less including punctuation and spaces.

If it is desired to specify the insulation resistance, enter Code 1470 on the SRS followed by the minimum allowable value in megohms. If it is desired to specify the requirement shown with Code 1471 in the SRL, enter Code 1471 on the SRS followed by an "X". If it is desired to specify the power handling capability, enter Code 1472 on the SRS followed by the nominal power handling capability in watts. If it is desired to specify the VSWR, enter Code 1473 on the SRS followed by the desired VSWR rating.

1.2.60 Preparation for Delivery

Preparation for delivery of antennas may require special instructions for cleaning, drying, sorting, etc. Use Code 1990 to specify special prepackaging instructions if the requirements in the document shown with Code 1006 are inadequate.

1.2.61 Workmanship

Although MIL-STD-454, Requirements for Equipment, is often used for workmanship requirements for parts, it is too broad and not definitive enough for use in component parts.

If workmanship requirements are different than those defined in the specification shown with Code 1006, complete the sentence, "Workmanship shall be in accordance with _____", using Code 6870. Limit the write-in to 189 characters, including spaces and punctuation. If any document is referenced, it must also be entered on the SRS with a code from Appendix B.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.62 Supersession Data

When a document is being requested to supersede a purchase description or drawing, the superseded number and its date should be entered with Codes 6871 and 6872. The number shall be self-descriptive, such as, "Purchase Description PD-60425" or "Drawing 10059004" and the date should be in military format, i.e., 3 July 1968.


1.2.63 Sources

Code 6873, 6874 or Codes 7039 and/or 7040 must be used to specify that the item(s) be procured from one source (source control) or from one or more suggested sources (specification control). When a document is generated for a single item, an "X" is used on the SRS along with Code 6873 or 6874 and at least one line of the Source Table must be used (Codes 5001 and 5002). If the generated document is for multiple "dash-number" items, Characteristic Codes from the Source Tabulation Table along with applicable write-in data must be entered on the SRS, using the rules outlined in 1.2.67. Code(s) 7039 and/or 7040 may be used to specify source control and/or specification control for single item(s), group of items, or all items, if the Source Tabulation Table is used. When source control is to be specified, the dash number(s) of the item or group of items to be so controlled are entered on the SRS adjacent to Code 7039. Item(s) to be specification controlled are entered on the SRS adjacent to Code 7040. The Source Tabulation Table provides the capacity for tabulation of 50 items and up to 6 sources and manufacturer's part numbers per item. The Source Tabulation Table may be found in the Appendices, located at the end of Section 1.2. The following description and illustration is intended to show the proper usage of the Source Tabulation Table.

The first Characteristic Code from the Source Tabulation Table, Code 9051, is entered on the SRS along with the first dash-number, designated as "01" or a "block" of dash numbers; for example, "01 through 05". Block dash numbers may be specified when sources are the same, when no manufacturer's part numbers have been established or when manufacturer's part numbers are identical. Dash number "02" or "02 through 09", as applicable, is entered on the SRS adjacent to Code 9052 and so on, using as many first column Source Tabulation Table Characteristic Codes as necessary to specify the required dash numbers. Codes 9151 through 9156, located in the third column of the table, are used to specify the manufacturer's FSCM number(s) (*Cataloging Handbook H4-1*) for the first dash-number or "block" or dash-numbered items listed. The manufacturer's name and address may also be added after the FSCM number. If the name

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

and address is inserted, it need only be used with the first entry of the FSCM number. Codes 9451 through 9456 are used to specify the manufacturer's part number for the first dash-number or "block" of dash-numbered items listed. The part number (when known) must be exactly as shown by the manufacturer, including all dashes, punctuation, and spaces. All insertions and write-ins must be limited to 189 characters (including spaces between words, punctuation marks, and "pound-sign") for each Characteristic Code.

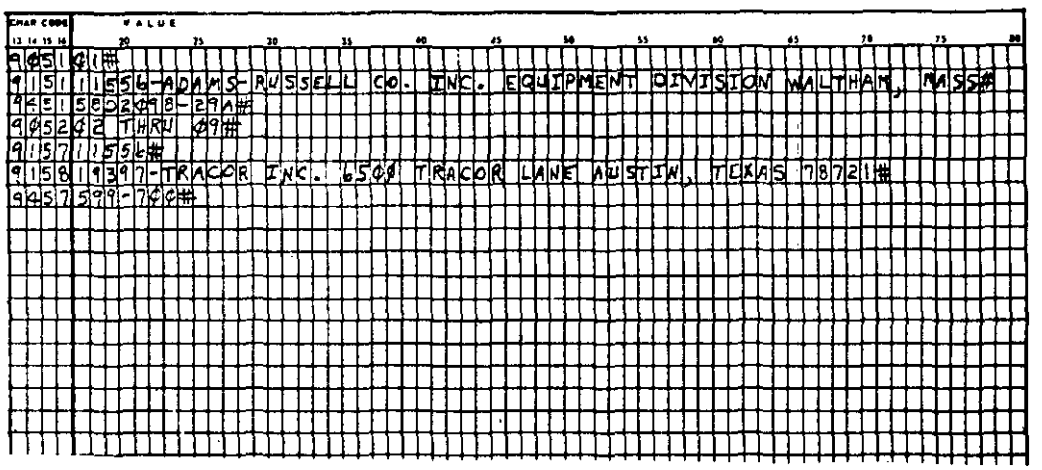

1.2.64 Material and Process Substitution

If it is desired to specify the requirement for material and process substitution shown with Code 6949 in the SRL, enter Code 6949 on the SRS followed by an "X".

1.2.65 Test Data and Test Methods

Recording Group A, B and/or C test data is not customary. Most component manufacturers have established "go-no go" test equipment for these inspection tests. Recording of data is usually "Special Handling" and results in increased costs. If it is desired that data be recorded, an "X" shall be entered after the applicable code. The specification will then require recording the data and require that it be available upon request.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Some manufacturers have developed individual test methods which yield results equivalent to those results obtainable by the customary military test. Should it be desired to permit alternate test methods in lieu of specified methods, place an "X" on the SRS with Code 1561. The supplier must then request approval to use alternate test methods and must demonstrate that the alternate methods do not relax the specified requirements. If strict adherence to the test methods specified is desired, this can be obtained by the use of an "X" with Code 1560. One must be selected.

1.2.66 Specification Requirements, Appendices and SRS

Preparation of an acceptable document by the computer is dependent upon two major factors. These are (1) correct selection of the appropriate Specification Requirements and their applicable codes, and (2) the proper application of the requirements and codes onto the SRS Form. The above is particularly important in the use of the various appendices.

1.2.67 Specification Requirements Sheet (SRS) Form

A form has been prepared to expedite and ease the preparation and submission of the requirements and parameters necessary for the computer to complete the process of "writing" a procurement document. It is important that the first 12 spaces be completed on each sheet. The next 4 numbered spaces (13, 14, 15 and 16) will contain the required Characteristic Codes; and the following 63 spaces (17 through 79) will be used for Characteristic Values. Each value must be ended by the use of the pound sign(#). The requester's complete name, mailing address and phone number must be at the top of each SRS submitted. If microfilm query is not completed, a hard copy will be furnished. Revision block is only to be used when a revision to an existing AEDPS is desired, and then only by the original requester or by a bonafide registered user.

Two removable fold-out SRS Forms are furnished following the Figures for each Generic Family of items. These forms are to be locally reproduced for use in submitting requests for computer generated Military Specification Exceptions. The first of the forms have the Characteristic Names and Characteristic Codes that are mandatory for each Generic Family. Where mandatory requirements are not specified on the form, any of the other Characteristic Codes in any of the Requirements, Tables, or Appendices can be used. The Characteristic Names are not required, but may be used if desired.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

A standard 80 column keypunch form may be used, provided the first 12 spaces on each line contain the Specification Title Code and Serial Number.

Caution: Where write-in capability is utilized, the absolute limit is 189 characters for each code, including spaces and punctuation. (Where tables are used, the write-in capability should be limited as specified for each column of the table.) When the write-in exceeds 63 characters, it should continue into the next line. It is important to continue through space 79 even if it breaks a word, and continue in space 17 on the second line. If more than one line is used, each line must be numbered in space 80, i.e., 1, 2, etc., with the pound sign (#) at the end of the value on the last line. If only one line is used, numbering is not required.

1.2.68 Searching for Existing Documents

1.2.68.1 General Requirements

Before a request for a document is submitted, it is generally recommended that a search be initiated, to determine if a document already exists in the system that will adequately fulfill the requirement. This is particularly desirable when a document is desired for an item for which a wide range in one of the parameters could be acceptable.

1.2.68.2 Instructions

When a search only is desired, the SRS must be marked in large letters at the top of each sheet with the words "SEARCH ONLY" (See the example in MIL-STD-35). The system will then only look for Characteristic Codes furnished and will ignore all others. For example, if Code 1011 specified "1.ØØ", the system will list all documents with this minimum dimension or if Code 1011 specified "1.ØΛ2.5Ø", the system will list all documents with a minimum dimension of 1 inch through 2.5 inches, providing all other characteristic values specified also match.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The same philosophy applies to other characteristics; for example, if a value of "100.0^108.0" for frequency range (Codes 1635 and 1636) is supplied and no material is supplied, the system would list all documents having a frequency range of 100.0 megaHertz through 108.0 megaHertz and show several materials.

Note: The symbol "^" is used between numeric values whenever a range of values is desired. The asterisk "*" on the basic SRS should be ignored by the requester for "SEARCH ONLY" usage.

Custodians:
Army-MI

User Activity:
Army-MU

Review Activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SL
Army-WC

Preparing Activity:
Army-MI
(Project EDS-A025-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil-- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.9	*Enter applicable codes from Appendix B and all referenced document numbers on the SRS.	
1.2.12	*Date	1003
1.2.13	*FSCM/Code Ident of Requester	1004
1.2.14	*Prime Contract Number	1005
1.2.15	*Applicable General Specification from Specification Title Index	1006
1.2.17	*Item Application	1008
1.2.18	*Drawing Figure Number	1009
1.2.19	*Dimensions (Enter on the SRS applicable codes, legends, and values from Appendix A)	
1.2.20	*Body Style	
	The antenna body shall conform to style number _____.	1562
	Note: If the Requirements and Quality Assurance Provisions in the Specification shown with Code 1006 meet the user's requirements, Characteristic Codes without an asterisk "*" in the far left edge should not be used. The generated document will then specify all of the requirements and tests of the referenced Specification.	
1.2.1.1	Tabulation (See referenced paragraph for Tabulation Table usage)	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.21	Design and Construction	
	Antenna Termination Type (Select one)	
	Wire leads	1563
	or	
	Terminal studs	1564
	or	
	Coaxial connector	1565
	or	
	Waveguide flange	
	Rectangular	1566
	Round	1567
	Input Coaxial Connector	
	*Series	1568
	*Specification	1569
	*End Design _____ (Male or female)	1570

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.21 Cont.	Mounting Facility (Select one if required)	
	Snap hook	1574
	or	
	Flange	1575
	or	
	Clamp	1576
	or	
	Bracket	1577
	or	
	Stud	1578
	or	
	Coupling Nut	1579
	Mounting Type (Select one if required)	
	Base	1580
	or	
	Flush	1581
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.21 Cont.	Mast	1582
	or	
	Pedestal	1583
	or	
	Support	1584
	or	
	Surface	1585
	or	
	Tower	1586
	or	
	Tripod	1587
	Mounting Holes	
	Quantity	1588
	Positioning Device (Select one if required)	
	Drive Motor	1592
	or	
	Synchro	1593

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.21 Cont.	Scanning Method (Select one if required)	
	Fixed	1594
	or	
	Oscillating	1595
	or	
	Tilting	1596
	or	
	Rotating	1597
	Weight	
	Pounds (Maximum)	1598
	or	
	Ounces (Maximum)	1599
	Polarization (Select one if required)	
	Linear _____ (Vertical or horizontal)	1600
	or	
	Circular _____ (Right hand or left hand)	1601
	or	
	Elliptical	1602

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.21 Cont.	Service Life (Select one if required)	
	Years (Nominal)	1606
	or	
	Months (Nominal)	1607
	or	
	Hours (Nominal)	1608
	Duty Cycle	
	*_____ Hours on	1609
	*_____ Hours off	1610
	Electrical Length (Select one if required)	
	Meters (Nominal)	1611
	or	
	Feet (Nominal)	1612
	or	
	Inches (Nominal)	1613
	*Wavelength (Full, one-half or one-fourth)	1614

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil/ -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.22	Operating Parameters	
	Input Voltage (Select one if required)	
	_____ Volts AC	1615
	*± _____ Volts AC	1616
	or	
	_____ Volts DC	1617
	*± _____ Volts DC	1618
	Beam Width at half power points	
	* _____ degrees maximum (E plane) at	1620
	* _____ megaHertz	1621
	* _____ degrees maximum (H plane) at	1622
	* _____ megaHertz	1623
	Ratio (Select one if required)	
	Axial _____ db	1624
	or	
	Front to Back _____ db	1625
	Pattern Type (Select one if required)	
	Omnidirectional	1626
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.22 Cont.	Unidirectional	
	Pencil - Beam	1628
	or	
	Fan - Beam	1629
	or	
	Shaped - Beam	1630
	Frequency Range	
	Requirement (Select one if required)	
	Requirements per specification shown with Code 1006 except _____.	1634
	or	
	Requirements as follows:	
	The Operating Frequency Range shall be:	
	*Lower Limits _____ (megaHertz)	1635
	*Upper Limits _____ (megaHertz)	1636
	or	
	The Frequency Range requirements shall have been met if the antenna meets the requirements for gain, VSWR, and power capability.	1637

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.24	Material	
	Select material in accordance with MIL-E-5400.	1641
	or	
	Select material in accordance with MIL-E-16400.	1642
	or	
	Select material in accordance with MIL-P-11268.	1643
	or	
	Enter codes on SRS from Table I, Material Table	1644
1.2.25	Finish	
	Finish antenna components in accordance with MIL-F-14072	1647
	or	
	Finish antenna components in accordance with MIL-E-16400	1648
	or	
	Enter codes on SRS from Table II, Finish Table	1649
1.2.26	Radiation Pattern	
	Test procedure (Select one if required)	
	Test per specification shown with Code 1006	1651
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.26 Cont.	Test per specification shown with Code 1006 except _____.	1652
	or	
	Test per _____ (see 1.2.9)	1653
	Requirement (Select one if required) (Man- if either Code 1651, 1652, or 1653 is selected)	
	Requirements per specification shown with Code 1006	1660
	or	
	Requirements per specification shown with Code 1006 except _____.	1661
	or	
	Requirements as follows:	
	The angle between the half power points of the maximum lobe shall be	
	*_____ degrees (average)	1662
	*_____ degrees (maximum)	1663
	Beam tilt	
	_____ degrees (average)	1664
	_____ degrees (maximum)	1665
	Horizontal omnidirectional pattern to within ± _____ decibels.	1666

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.26 Cont.	Field Intensity	
	The ratio of the test unit power to a standard unit power shall be _____ db (minimum).	1667
	E-Theta _____ Microvolts/Meter	1668
	E-Phi _____ Microvolts/Meter	1669
	or	
	Nulls equal or exceed _____ db down from a point of maximum antenna response.	1670
	Direct to reciprocal bearing error _____ degrees maximum.	1671
	or	
	During flight testing of the antenna, the product of the RF signal in microvolts times the distance from the transmitter in nautical miles shall be _____ minimum.	1672
1.2.27	Gain	
	Test procedure (Select one if required)	
	Test per specification shown with Code 1006	1675
	or	
	Test per specification shown with Code 1006 except _____.	1676
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.27 Cont.	Test per MIL-A-4946.	1677
	or	
	Test per MIL-A-6224.	1678
	Requirement (Select one if required) (Mandatory if either Code 1675, 1676, 1677, or 1678 is selected)	
	Requirements per specification shown with Code 1006	1682
	or	
	Requirements per specification shown with Code 1006 except _____.	1683
	or	
	Requirements as follows:	
	The gain shall not be less than _____ decibels over that obtained from a half-wave dipole tuned to maximum efficiency.	1684
	*With reference to (Select one)	
	Linear polarization	1685
	Circular polarization	1686
	or	
	The gain shall be not less than _____ decibels above an isotropic level.	1687

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.28	Insulation Resistance	
	Test procedure (Select one if required)	
	Test per specification shown with Code 1006	1370
	or	
	Test per specification shown with Code 1006 except _____.	1371
	or	
	Test per MIL-A-18376.	1372
	Requirement (Select one if required) (Mandatory if either Code 1370, 1371, or 1372 is selected)	
	Requirements per specification shown with Code 1006	1375
	or	
	Requirements per specification shown with Code 1006 except _____.	1376
	or	
	The resistance shall be not less than _____ megohms.	1377
1.2.29	Impedance	
	Test procedure (Select one if required)	
	Test per specification shown with Code 1006	1701
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.29 Cont.	Test per specification shown with Code 1006 except _____.	1702
	or	
	Test per MIL-A-5815.	1703
	or	
	Test per MIL-A-4946.	1704
	Requirement (Select one if required) (Mandatory if either Code 1701, 1702, 1703, or 1704 is selected)	
	Requirements per specification shown with Code 1006	1708
	or	
	Requirements per specification shown with Code 1006 except _____.	1709
	or	
	Requirements as follows:	
	The normal impedance of the antenna shall be _____ ohms at a frequency of	1710
	*lower limits _____ (megaHertz)	1711
	*upper limits _____ (megaHertz)	1712
1.2.30	Voltage Standing Wave Ratio (VSWR)	
	Test procedure (Select one if required)	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.30 Cont.	Test per specification shown with Code 1006	1716
	or	
	Test per specification shown with Code 1006 except _____.	1717
	or	
	Test shall be by the Slotted Line Method	1718
	or	
	Test shall be by the UHF Bridge Method	1719
	or	
	Test shall be by the Admittance Method	1720
	or	
	Test shall be by another suitable method.	1721
	Requirement (Select one if required) (Mandatory if either Code 1716, 1717, 1718, 1719, 1720, or 1721 is selected)	
	Requirements per specification shown with Code 1006	1725
	or	
	Requirements per specification shown with Code 1006 except _____.	1726
	or	
	Requirements as follows:	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35. FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.30 Cont.	The VSWR shall not exceed a	
	*Value of _____.	1727
	*Frequency Range	
	Lower Limits _____ (megaHertz)	1728
	Upper Limits _____ (megaHertz)	1729
1.2.31	Power Capability	
	Test procedure (Select one if required)	
	Test per specification shown with Code 1006	1733
	or	
	Test per specification shown with Code 1006 except _____.	1734
	or	
	Test per MIL-A-55101.	1735
	RF power (Watts) nominal	1736
	Test duration (minutes) nominal	1737
	Measurement interval (minutes) nominal	1738
	Test altitude (feet above sea level) nominal.	1739

*INDICATES MANDATORY REQUIREMENTS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.31 Cont.	Requirement (Select one if required) (Mandatory if either Code 1733, 1734, or 1735 is selected)	
	Requirements per specification shown with Code 1006	1743
	or	
	Requirements per specification shown with Code 1006 except _____.	1744
	or	
	Requirements as follows:	
	The antenna shall not be damaged by applied power.	1745
	The reflected power shall not exceed the forward power by more than _____ percent.	1746
1.2.32	Radio Interference	
	Test procedure (Select one if required)	
	Test per specification shown with Code 1006	1750
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.32 Cont.	Test per specification shown with Code 1006 except _____.	1751
	or	
	Test per MIL-I-6051.	1752
	Requirement (Select one if required) (Mandatory if either Code 1750, 1751, or 1752 is selected)	
	Requirements per specification shown with Code 1006	1755
	or	
	Requirements per specification shown with Code 1006 except _____.	1756
	or	
	Requirements as follows:	
	No undesirable response or malfunction due to interference from other installed components.	1757
1.2.33	Continuity	
	Test procedure (Select one if required)	
	Test per specification shown with Code 1006	1761
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.33 Cont.	Test per specification shown with Code 1006 except _____.	1762
	or	
	Test per MIL-A-4946.	1763
	Requirement (Select one if required (Mandatory if either Code 1761, 1762, or 1763 is selected)	
	Requirements per specification shown with Code 1006	1767
	or	
	Requirements per specification shown with Code 1006 except _____.	1768
	or	
	Requirements as follows:	
	All electrical wiring shall exhibit point to point electrical continuity.	1769
1.2.34	Feed System Efficiency	
	Test procedure (Select one if required)	
	Test per specification shown with Code 1006	1772
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil - Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.34 Cont.	Test per specification shown with Code 1006 except _____.	1773
	or	
	Test per MIL-A-55101.	1774
	Requirement (Select one if required) (Mandatory if either Code 1772, 1773, or 1774 is selected)	
	Requirements per specification shown with Code 1006	1777
	or	
	Requirements per specification shown with Code 1006 except _____.	1778
	or	
	Requirements per MIL-A-55101.	1779
1.2.35	Admittance	
	Test procedure (Select one if required)	
	Test per specification shown with Code 1006	1783
	or	
	Test per specification shown with Code 1006 except _____.	1784
	or	
	Test per MIL-A-55101.	1785

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.35 Cont.	Requirement (Select one if required) (Mandatory if either Code 1783, 1784, or 1785 is selected)	
	Requirements per specification shown with Code 1006	1789
	or	
	Requirements per specification shown with Code 1006 except _____.	1790
	or	
	Requirements per specification MIL-A-55101.	1791
	Admittance _____ (mhos)	1792
1.2.36	Orientation	
	Test procedure (Select one if required)	
	Test per specification shown with Code 1006	1795
	or	
	Test per specification shown with Code 1006 except _____.	1796
	or	
	Test per MIL-A-55101.	1797
	Plane of inclination	
	Forward	1798
	Backward	1799

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.36 Cont.	Left	1800
	Right	1801
	Inclination time _____ minutes (Nominal)	1802
	Degree of inclination (Degrees)	1803
	*± _____ degrees	1804
	Requirement (Select one if required) (Mandatory if either Code 1795, 1796, or 1797 is selected)	
	Requirements per specification shown with Code 1006	1807
	or	
	Requirements per specification shown with Code 1006 except _____.	1808
	or	
	Requirements as follows:	
	The antenna shall meet the requirements of the VSWR test in each inclined plane.	1809
1.2.37	Flight Test	
	Test procedure (Select one if required)	
	Test per specification shown with Code 1006	1812
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.37 Cont.	Test per specification shown with Code 1006 except _____.	1813
	or	
	Test per Flight Plan 1 of MIL-A-6300	1814
	or	
	Test per Flight Plan 2 of MIL-A-6300	1815
	Requirement (Select one if required) (Mandatory if either Code 1812, 1813, 1814, or 1815 is selected)	
	Requirements per specification shown with Code 1006	1819
	or	
	Requirements per specification shown with Code 1006 except _____.	1820
	or	
	Requirements as follows:	
	The radiation receiving pattern and efficiency of the antenna shall be such that satisfactory indications are obtained on the navigation receiver indicators when the antenna is flight tested as specified in MIL-A-6300.	1821

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.38	Impact	
	Test procedure (Select one if required)	
	Test per specification shown with Code 1006	1825
	or	
	Test per specification shown with Code 1006 except _____.	1826
	or	
	Test per MIL-A-55101.	1827
	Requirement (Select one if required) (Mandatory if either Code 1825, 1826, or 1827 is selected)	
	Requirements per specification shown with Code 1006	1831
	or	
	Requirements per specification shown with Code 1006 except _____.	1832
	or	
	Requirements as follows:	
	There shall be only minor physical damage.	1833
	The antenna shall be capable of meeting the requirements of the VSWR Test.	1834

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.39	Air-Seal	
	Test procedure (Select one if required)	
	Test per specification shown with Code 1006	1838
	or	
	Test per specification shown with Code 1006 except _____.	1839
	or	
	Test per MIL-A-55101	1840
	or	
	Test per MIL-A-5815	1841
	Requirement (Select one if required) (Mandatory if either Code 1838, 1839, 1840, or 1841 is selected)	
	Requirements per specification shown with Code 1006	1843
	or	
	Requirements per specification shown with Code 1006 except _____.	1844
	or	
	Requirements as follows:	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.39 Cont.	The decrease in vacuum shall not exceed _____ pounds per square inch, gauge, per minute.	1845
	or	
	There shall not be a continuous flow of air bubbles when tested as specified in MIL-A-5815.	1846
1.2.40	Leakage	
	Test procedure (Select one if required)	
	Test per specification shown with Code 1006	1849
	or	
	Test per specification shown with Code 1006 except _____.	1850
	or	
	Test per MIL-STD-810, Method 512, Procedure 1	1851
	Temperature of water (Degrees C)	1852
	*± _____ degrees C	1853
	Temperature of test item above that of water _____ degrees C	1854
	*± _____ degrees C	1855
	Test duration (Minutes)	1856
	*± _____ minutes	1857

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.40 Cont.	Requirement (Select one if required) (Mandatory if either Code 1852, 1853, or 1854 is selected)	
	Requirements per specification shown with Code 1006	1858
	or	
	Requirements per specification shown with Code 1006 except _____.	1859
	or	
	Requirements as follows:	
	There shall be no evidence of leakage.	1860
1.2.41	Bounce	
	Test procedure (Select one if required)	
	Test per specification shown with Code 1006	1864
	or	
	Test per specification shown with Code 1006 except _____.	1865
	or	
	Test per MIL-A-55101.	1866
	Requirement (Select one if required) (Mandatory if either Code 1864, 1865, or 1866 is selected)	
	Requirements per specification shown with Code 1006	1870
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.41 Cont.	Requirements per specification shown with Code 1006 except _____.	1871
	or	
	Requirements as follows:	
	There shall be no physical damage.	1872
	After the bounce test, the antenna shall meet the performance requirements of one or more of the following tests:	
	VSWR (see 1.2.30)	1873
	Power Capability (see 1.2.31)	1874
	Feed System Efficiency (see 1.2.34)	1875
	Admittance (see 1.2.35)	1876
1.2.42	Flexural Strength	
	Test procedure (Select one if required)	
	Test per specification shown with Code 1006	1877
	or	
	Test per specification shown with Code 1006 except _____.	1878
	or	
	Test per MIL-A-55101.	1879
	Requirement (Select one if required) (Mandatory if either Code 1877, 1878, or 1879 is selected)	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.42 Cont.	Requirements per specification shown with Code 1006	1883
	or	
	Requirements per specification shown with Code 1006 except _____.	1884
	or	
	Requirements as follows:	
	No electrical or mechanical damage.	1885
1.2.43	Static Load	
	Test procedure (Select one if required)	
	Test per specification shown with Code 1006	1889
	or	
	Test per specification shown with Code 1006 except _____.	1890
	or	
	Test per MIL-A-5815.	
	*Load parallel to the major axis of _____ pounds (Nominal).	1892
	*Load parallel to the minor axis of _____ pounds (Nominal)	1893
	or	
	Test per MIL-A-18376	1894
	Ultimate design load _____ pounds per square inch.	1895

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.43 Cont.	Requirement (Select one if required) (Mandatory if either Code 1889, 1890, 1891, or 1894 is selected)	
	Requirements per specification shown with Code 1006	1899
	or	
	Requirements per specification shown with Code 1006 except _____.	1900
	or	
	Requirements as follows:	
	There shall be no permanent deformation or impairment of performance capabilities.	1901
1.2.44	Altitude	
	Test procedure (Select one if required)	
	Test per specification shown with Code 1006	1905
	or	
	Test per specification shown with Code 1006 except _____.	1906
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.44 Cont.	Test per MIL-STD-810, Method 500	
	*Procedure _____	1907
	Lowest operating temperature (Degrees C) (Procedure II only)	1908
	*± _____ degrees C	1909
	Lowest operating pressure in _____ inches of Hg	1910
	Rate of pressure change (Inches of Hg/minute)	1911
	Duration of reduced pressure condition _____ (minutes)	1912
	Requirement (Select one if required) (Mandatory if either Code 1905, 1906, or 1907 is selected)	
	Requirements per specification shown with Code 1006	1914
	or	
	Requirements per specification shown with Code 1006 except _____.	1915
	or	
	Requirements as follows:	
	The antenna shall withstand the altitude conditions without degradation of performance.	1916

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.44 Cont.	The antenna shall meet the performance requirements of the VSWR test (see 1.2.30):	
	Before the altitude test	1917
	During the altitude test	1918
	After the altitude test	1919
1.2.45	Wind	
	Test procedure (Select one if required)	
	Test per specification shown with Code 1006	1921
	or	
	Test per specification shown with Code 1006 except _____.	1922
	or	
	Test per MIL-A-4946.	1923
	Requirement (Select one if required) (Mandatory if either Code 1921, 1922, or 1923 is selected)	
	Requirements per specification shown with Code 1006	1927
	or	
	Requirements per specification shown with Code 1006 except _____.	1928
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.45 Cont.	Requirements as follows:	
	There shall be no damage.	1929
1.2.46	Ice	
	Test procedure (Select one if required)	
	Test per specification shown with Code 1006	1933
	or	
	Test per specification shown with Code 1006 except _____.	1934
	or	
	Test per MIL-A-4946.	1935
	Requirement (Select one if required) (Mandatory if either Code 1933, 1934, or 1935 is selected)	
	Requirements per specification shown with Code 1006	1939
	or	
	Requirements per specification shown with Code 1006 except _____.	1940
	or	
	Requirements as follows:	
	The performance of the antenna shall not be altered during the test.	1941

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.47	Sand and Dust	
	Test procedure (Select one if required)	
	Test per specification shown with Code 1006	1945
	or	
	Test per specification shown with Code 1006 except _____.	1946
	or	
	Test per MIL-STD-810, Method 510, Procedure 1	1947
	Screen size _____ mesh	1948
	Test temperature (Degrees C)	1949
	*± _____ degrees C	1950
	Sand and dust velocity	
	Feet per minute (minimum)	1951
	Feet per minute (maximum)	1952
	Test duration _____ hours (Nominal)	1953
	Increase temperature to _____ degrees C	1954
	*± _____ degrees C	1955
	Test duration _____ hours (Nominal)	1956

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.47 Cont.	Requirement (Select one if required) (Mandatory if either Code 1945, 1946, or 1947 is selected)	
	• Requirements per specification shown with Code 1006	1958
	or	
	Requirements per specification shown with Code 1006 except _____.	1959
	or	
	Requirements as follows:	
	There shall be no deterioration of external or internal parts that would affect performance.	1960
	After test, the antenna shall meet the performance requirements of the VSWR test as specified.	1961
1.2.48	Rain	
	Test procedure (Select one if required)	
	Test per specification shown with Code 1006	1965
	or	
	Test per specification shown with Code 1006 except _____.	1966
	or	

•INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.48 Cont.	Test per MIL-STD-810, Method 506, Procedure 1.	
	*During test apply:	
	_____ kilowatts of power	1967
	or	
	_____ volts, 60 Hz, at one ampere	1968
	*Duration of applied power _____ minutes.	1969
	Requirement (Select one if required) (Mandatory if either Code 1965, 1966, or 1969 is selected)	
	Requirements per specification shown with Code 1006	1970
	or	
	Requirements per specification shown with Code 1006 except _____.	1971
	or	
	Requirements as follows:	
	There shall be no evidence of deterioration of quality or performance.	1972
	After test, the antenna shall meet the performance requirements of the VSWR test as specified.	1973

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.49	High Temperature	
	Test procedure (Select one if required)	
	Test per specification shown with Code 1006	1975
	or	
	Test per specification shown with Code 1006 except _____.	1976
	or	
	Test per MIL-STD-810, Method 501.	
	*Procedure _____	1977
	*Storage temperature (Degrees C)	1978
	*± _____ degrees C	1979
	*Operating temperature (Degrees C)	1980
	*± _____ degrees C	1981
	or	
	Test per MIL-E-16400	1982
	or	
	Test per MIL-STD-169	1983
	Requirement (Select one if required) (Mandatory if either Code 1975, 1976, 1977, 1982, or 1983 is selected)	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.49 Cont.	Requirements per specification shown with Code 1006	1985
	or	
	Requirements per specification shown with Code 1006 except _____.	1986
	or	
	Requirements as follows:	
	The antenna shall be capable of operating at specified test temperatures without any degradation of performance.	1987
	After test, the antenna shall meet the performance requirements of the VSWR test as specified.	1988
1.2.50	Low Temperature	
	Test procedure (Select one if required)	
	Test per specification shown with Code 1006	1991
	or	
	Test per specification shown with Code 1006 except _____.	1992
	or	
	Test per MIL-STD-810, Method 502, Procedure 1	
	*Storage temperature (Degrees C)	1994

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.50 Cont.	*± _____ degrees C	1995
	*Lowest operating temperature	1996
	* _____ degrees C	1997
	or	
	Test per MIL-E-16400	1998
	or	
	Test per MIL-STD-169	1999
	Requirement (Select one if required) (Mandatory if either Code 1991, 1992, 1993, 1998, or 1999 is selected)	
	Requirements per specification shown with Code 1006	2000
	or	
	Requirements per specification shown with Code 1006 except _____.	2001
	or	
	Requirements as follows:	
	The antenna shall be capable of operating at specified test temperatures without any degradation of performance.	2002
	After test, the antenna shall meet the performance requirements of the VSWR test as specified.	2003

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.51	Thermal Shock	
	Test procedure (Select one if required)	
	Test per specification shown with Code 1006	4712
	or	
	Test per specification shown with Code 1006 except _____.	4713
	or	
	Test per MIL-STD-810, Method 503, *Procedure I*	4714
	or	
	Test per MIL-A-6224	4715
	Note: Measurements before and after the test shall be in accordance with the requirements selected.	
	Requirement (Select one if required) (Mandatory if either Code 4712, 4713, 4714, or 4715 is selected)	
	Requirements per specification shown with Code 1006	4719
	or	
	Requirements per specification shown with Code 1006 except _____.	4720
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.51 Cont.	Requirements as follows:	
	Requirement after test:	
	No allowable damage that will affect form, fit or function.	4722
	After test, the antenna shall meet the performance requirements of the VSWR test as specified.	4723
1.2.52	Shock	
	Test procedure (Select one if required)	
	Test per specification shown with Code 1006	1494
	or	
	Test per specification shown with Code 1006 except _____.	1495
	or	
	Test per MIL-STD-810, Method 516.	
	*Procedure (Number)	1498
	*Shock Pulse (Figure number)	1499
	*Peak amplitude (G's)	1500
	*Pulse duration (Milliseconds)	1501
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.52 Cont.	Test per MIL-S-901	1502
	Grade	1503
	Class	1504
	Type	1505
	Equipment Classification	1506
	Test Classification	1507
	Note: Measurements after test shall be in accordance with the requirements selected.	
	Requirement (Select one if required) (Mandatory if either Code 1494, 1495, 1496 or 1501 is selected)	
	Requirements per specification shown with Code 1006	1510
	or	
	Requirements per specification shown with Code 1006 except _____.	1511
	or	
	Requirements as follows:	
	No physical damage	1512

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.52 Cont.	No significant effect on performance	1513
	After the shock test, the antenna shall meet the performance requirements of one or more of the following tests. (Select as required)	
	VSWR (see 1.2.30)	1514
	Power Capability (see 1.2.31)	1515
	Feed System Efficiency (see 1.2.34)	1516
	Admittance (see 1.2.35)	1517
1.2.53	Fungus Resistance	
	Test procedure (Select one if required)	
	Test per specification shown with Code 1006	4753
	or	
	Test per specification shown with Code 1006 except _____.	4754
	or	
	Test per MIL-STD-810, Method 508, Procedure 1.	4755
	Test period (Days)	4756

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.53 Cont.	Requirement (Select one if required) (Mandatory if either Code 4753, 4754, or 4755 is selected)	
	Requirements per specification shown with Code 1006	4759
	or	
	Requirements per specification shown with Code 1006 except _____.	4760
	or	
	Requirement as follows:	
	The antenna shall show no evidence of fungus.	4761
	or	
	Supplier's certification of compliance may be accepted in lieu of testing.	4762
1.2.54	Salt Fog	
	Test procedure (Select one if required)	
	Test per specification shown with Code 1006	4769
	or	
	Test per specification shown with Code 1006 except _____.	4770
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.54 Cont.	Test per MIL-STD-810, Method 509, Procedure 1.	4771
	Salt solution (Percent)	4772
	Exposure time (Hours)	4773
	Drying period (Hours)	4774
	Requirement (Select one if required) (Mandatory if either Code 4769, 4770, or 4771 is selected)	
	Requirements per specification shown with Code 1006	4775
	or	
	Requirements per specification shown with Code 1006 except _____.	4776
	or	
	Requirements as follows:	
	There shall be no evidence of corrosion.	4777
	After test, the antenna shall meet the performance requirements of the VSWR test as specified.	4778
1.2.55	Humidity	
	Test procedure (Select one if required)	
	Test per specification shown with Code 1006	4787
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.55 Cont.	Test per specification shown with Code 1006 except _____.	4788
	or	
	Test per MIL-STD-810, Method 507, Procedure _____ (Enter applicable Procedure Number)	4789
	or	
	Test per MIL-E-16400	4791
	Requirement (Select one if required) (Mandatory if either Code 4787, 4788, or 4789 is selected)	
	Requirements per specification shown with Code 1006	4794
	or	
	Requirements per specification shown with Code 1006 except _____.	4795
	or	
	Requirements as follows:	
	There shall be no physical or functional damage that would impair the performance of the antenna.	4796
	After test, the antenna shall meet the performance requirements of the VSWR test as specified.	4797

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.56	Moisture Resistance	
	Test procedure (Select one if required)	
	Test per specification shown with Code 1006	1390
	or	
	Test per specification shown with Code 1006 except _____.	1391
	or	
	Test per MIL-STD-202, Method 106	
	*Loading voltage (Volts dc)	1392
	Note: Before and after test the measurements taken shall be in accordance with the requirements selected.	
	or	
	Test per MIL-STD-170	1396
	Requirement (Select one if required) (Mandatory if either Code 1390, 1391, 1392 or 1396 is selected)	
	Requirements per specification shown with Code 1006	1399
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.56 Cont.	Requirements per specification shown with Code 1006 except _____.	1400
	or	
	Requirements as follows:	
	There shall be no physical or functional damage to the antenna that would impair the performance as specified.	1401
	During and after the test cycling, the antenna shall meet the performance requirements of one or more of the following tests:	
	VSWR	1402
	Power capability	1403
	Feed system efficiency	1404
	Admittance	1405
1.2.57	Random Vibration	
	Test procedure (Select one if required)	
	Test per specification shown with Code 1006	1425
	or	
	Test per specification shown with Code 1006 except _____.	1426
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
	Test per MIL-STD-810, Method 514, Procedure _____ (Select Procedure II thru VII as applicable)	1427
	*Curve(s)	1428
	*Temperature (Degrees C)	1429
	*± _____ degrees C	1430
	*Test duration (Hours)	1431
	or	
	Test per MIL-STD-167, Type 1	1434
	Requirement (Select one if required) (Mandatory if either Code 1425, 1426, 1427 or 1434 is selected)	
	Requirements per specification shown with Code 1006	1436
	or	
	Requirements per specification shown with Code 1006 except _____.	1437
	or	
	Requirements as follows:	
	There shall be no physical or functional damage that would impair the performance of the antenna.	1438

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil - Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.58	High Frequency Vibration	
	Test procedure (Select one if required)	
	Test per specification shown with Code 1006	1441
	or	
	Test per specification shown with Code 1006 except _____.	1442
	or	
	Test per Method 204 of MIL-STD-202	
	*Test Condition Letter	1443
	Method of mounting specimen(s) (Select one)	
	Any suitable method of mounting.	1444
	or	
	Normal method of mounting.	1445
	or	
	Mount in accordance with _____ (See 1.2.9)	1446
	Electrical load (Ohms)	1447

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.58 Cont.	Method of determining mechanical resonance (Select one)	
	Visually, by means of a strobotac	1448
	or	
	Electrical output indications	1449
	Note: Measurements after the test shall be in accordance with the requirements selected.	
	Requirement (Select one) (Mandatory if either Code 1441, 1442 or 1443 is selected)	
	Requirements per specification shown with Code 1006	1450
	or	
	Requirements per specification shown with Code 1006 except _____.	1451
	or	
	Requirements after test:	
	Insulation resistance (megohms) minimum	1452
	No allowable damage that will affect form, fit or function.	1453
	The power handling capabilities shall be _____ watts (Nominal)	1454
	After test, the antenna shall meet the performance requirements of the VSWR test as specified.	1455

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.59	Low Frequency Vibration	
	Test procedure (Select one if required)	
	Test per specification shown with Code 1006	1456
	or	
	Test per specification shown with Code 1006 except _____.	1457
	or	
	Test per Method 201 of MIL-STD-202	
	*Duration of application per axis (Hours)	1458
	Number of axes (Quantity)	1459
	Method of mounting (Select one)	
	Any suitable method of mounting.	1460
	or	
	Normal method of mounting.	1461
	or	
	Mount in accordance with _____ (See 1.2.9)	1462

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.59	Direction of motion (Select one)	
	On centerline of most sensitive axis.	1463
	or	
	Ninety degrees from centerline of most sensitive axis.	1464
	or	
	In each of three mutually perpendicular axes.	1465
	or	
	Direction in accordance with _____ (See 1.2.9)	1466
	Electrical load (Ohms)	1467
	Note: Measurements after the test shall be in accordance with the requirements selected.	
	Requirement (Select one) (Mandatory if either Code 1456, 1457 or 1458 is selected)	
	Requirements per specification shown with Code 1006	1468
	or	
	Requirements per specification shown with Code 1006 except _____.	1469
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.59 Cont.	Requirements after test:	
	Insulation resistance (Megohms) minimum	1470
	No allowable damage that will affect form, fit or function.	1471
	The power handling capabilities shall be _____ watts (Nominal)	1472
	The VSWR shall be _____.	1473
1.2.60	Preparation for Delivery (If exception is required)	
	Preparation for delivery shall be in accordance with _____.	1990
1.2.61	Workmanship	
	Shall be in accordance with _____.	6870

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil - Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.62	Superseded Document	6871
	*Date	6872
1.2.63	*Source (Select one of the following and complete at least one line of the Source Table except when source tabulation is used)	
	Source Control	6873
	or	
	Specification Control	6874
	or	
	Source Tabulation Table (Enter applicable codes on the SRS Form from Appendix S)	
	Source Control Items _____.	7039
	Specification Control Items _____.	7040
1.2.64	Material and Process Substitution	
	Items furnished to this document shall be representative of a product which has been accepted by the procuring activity. No substitution of materials and processes or change in design shall be made without prior approval of the procuring activity when such change affects interchangeability with respect to installation, performance, or design within the requirements of this document.	6949

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.10	*First Article Inspection - Select One	
	First Article Inspection on this item in accordance with the testing in the applicable general specification and in the order specified herein. (Enter all required tests in desired order of testing on the SRS, using applicable codes from Appendix C.)	1540
	First Article Inspection on this item in accordance with the testing in the applicable general specification.	1541
	First Article Inspection not required.	1542
	First Article Inspection on this item in accordance with the testing in the applicable general specification except as shown on Appendix J. (Enter all tests to be deleted on the SRS, using applicable codes from Appendix J.)	7021
	First Article Inspection on this item in accordance with Appendix C. (Enter all required tests in desired order of testing on the SRS, using applicable codes from Appendix C.)	7022
	First Article Inspection on this item in accordance with the testing in the applicable general specification except _____.	7023

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.65	First Article Test Data (Select one if required)	
	First Article Test Data	7024
	First Article Test Data on a similar item.	1543
1.2.10	*Group A Inspection - Select One	
	Group A inspection on this item in accordance with the applicable general military specification and in the order specified herein. (Enter all required tests in desired order of testing on the SRS, using applicable codes from Appendix D.)	1545
	Group A inspection on this item in accordance with the applicable general military specification with additional tests required. (Enter the added tests only on the SRS, using applicable codes from Appendix D. Enter the sequence on the SRS, using applicable codes from Appendix G.)	1546
	Group A inspection on this item in accordance with the applicable general military specification with certain tests deleted. (Enter deleted tests on the SRS, using applicable codes from Appendix H.)	1547
	Group A inspection on this item in accordance with the applicable general military specification.	1548

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.10 Cont.	Group A inspection on this item in accordance with Appendix D. (Enter all required tests in the desired order of testing on the SRS, using applicable codes from Appendix D.) (If this code is used, Code 7033 or 7034 is mandatory.)	7031
	*Group A sampling plan is specified in MIL-STD-105. (Enter inspection level and AQL on the SRS, using applicable codes from Appendix D.) (If sub groups are used, use Code 7036.)	7033
	Tests in each Group A inspection sub group shall be combined for inspection. (Use this code if Appendix D shows sub groups.)	7036
	or	
	*Group A sampling plan shall be 100 percent with defective units removed. (Enter 100 percent on the SRS, using applicable codes from Appendix D.)	7034
	Lot shall be rejected if defectives exceed _____ percent.	7035
	Group A inspection on this item in accordance with applicable general military specification except _____.	7032
1.2.65	Group A Test Data to be Recorded	1549

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.10	*Group B Inspection - Select One	
	Group B inspection on this item in accordance with the applicable general specification and in the order specified herein. (Enter all required tests in desired order of testing on the SRS, using codes from Appendix E-1 or E-2 as applicable.)	1550
	Group B inspection on this item in accordance with the applicable general military specification with additional tests required. (Enter the added tests only on the SRS, using codes from Appendix E-1 or E-2 as applicable. Enter the sequence on the SRS, using applicable codes from Appendix G.)	1551
	Group B inspection on this item in accordance with the applicable general military specification with certain tests deleted. (Enter deleted tests on the SRS, using applicable codes from Appendix H.)	1552
	Group B inspection on this item in accordance with the applicable general military specification.	1553
	Group B inspection on similar items in accordance with the applicable general military specification.	1554
	Group B inspection not required.	7045

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil - Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.10 Cont.	Group B inspection on this item in accordance with Appendix E-1 for sample as specified in the table. (Enter all required tests in the desired order of testing on the SRS, using applicable codes from Appendix E-1.)	7041
	Group B inspection on this item in accordance with Appendix E-2 for statistical Sampling in accordance with MIL-STD-105. (Enter all required tests in desired order of testing on the SRS, using applicable codes from Appendix E-2.)	7044
	Group B inspection on this item in accordance with applicable general military specification except _____.	7042
1.2.65	Group B Test Data to be Recorded.	7043
1.2.10	Group C Inspection - Select One (If required)	
	Group C inspection on this item in accordance with the applicable general military specification and in the order specified herein. (Enter all required tests in desired order of test on the SRS, using applicable codes from Appendix F.)	1555
	Group C inspection on this item in accordance with the applicable general military specification with additional tests required. (Enter the added tests only on the SRS, using applicable codes from Appendix F. Enter the sequence on the SRS, using applicable codes from Appendix G.)	1556

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.10 Cont.	Group C inspection on this item in accordance with the applicable general military specification with certain tests deleted. (Enter deleted tests on the SRS, using applicable codes from Appendix H.)	1557
	Group C inspection on this item in accordance with the applicable general military specification.	1558
	Group C inspection on similar items in accordance with the applicable general military specification.	1559
	Group C inspection on this item in accordance with Appendix F. (Enter all required tests in desired order of testing on the SRS, using applicable codes from Appendix F.)	7053
	Group C inspection not required.	7058
	Group C inspection on this item in accordance with applicable general military specification except _____.	7054
1.2.65	Group C Test Data to be Recorded.	7055
1.2.65	*Test Methods - Select One	
	As stated herein.	1560
	Alternate methods permitted.	1561

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.10	Inspection of Preparation for Delivery	
	As specified in Specification shown with Code 1006	1526
	or	
	As required to determine compliance with Section 5	1527
	Sampling plan shall be _____.	1528

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIAL REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.8	Additional Requirement(s) (List each requirement separately starting with Code 7001, 7002, etc. and limiting each to 189 characters including punctuation and spaces).	7001
		7002
		7003
		7004
		7005
1.2.8	Marking requirements (List each requirement separately starting with Code 6991, 6992, etc. and limiting each to 189 characters including punctuation and spaces).	6991
		6992
		6993
		6994
		6995
1.2.8	Additional Quality Assurance Provisions (List each item separately starting with Code 7011, 7012, etc. and limiting each to 189 characters including punctuation and spaces).	7011
		7012
		7013
		7014
		7015

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIAL REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.8	Packaging Requirement(s) for Section 5 (List each requirement separately starting with Code 7006, 7007, etc. and limiting each to 189 characters including punctuation and spaces).	7006
		7007
		7008
		7009
		7010
1.2.8	Additional Note(s) for Section 6 (List each requirement separately starting with Code 7016, 7017, etc. and limiting each to 189 characters including punctuation and spaces).	7016
		7017
		7018
		7019
		7020

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

(see 1.2.24)

TABLE I
MATERIAL TABLE

COMPONENT		MATERIAL		SPECIFICATION		NUMBER OR ALLOY NUMBER		CONDITION OR TEMPER		FORM		CLASS		GRADE		TYPE		COMPOSITION	
CODE	NAME	CODE	NUMBER FROM MIL-STD-35-1	CODE	NUMBER	CODE	NUMBER	CODE	NUMBER	CODE	NAME	CODE	NUMBER	CODE	NUMBER	CODE	NUMBER	CODE	NUMBER OR LETTER
5080		5081		5082		5083		5084		5085		5086		5087		5088		5089	
5090		5091		5092		5093		5094		5095		5096		5097		5098		5099	
5100		5101		5102		5103		5104		5105		5106		5107		5108		5109	
5110		5111		5112		5113		5114		5115		5116		5117		5118		5119	
5120		5121		5122		5123		5124		5125		5126		5127		5128		5129	
5130		5131		5132		5133		5134		5135		5136		5137		5138		5139	
5140		5141		5142		5143		5144		5145		5146		5147		5148		5149	
5150		5151		5152		5153		5154		5155		5156		5157		5158		5159	
5160		5161		5162		5163		5164		5165		5166		5167		5168		5169	
5170		5171		5172		5173		5174		5175		5176		5177		5178		5179	
5180		5181		5182		5183		5184		5185		5186		5187		5188		5189	
5190		5191		5192		5193		5194		5195		5196		5197		5198		5199	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

(see 1.2.25)

TABLE II
FINISH TABLE

COMPONENT		COMPONENT SURFACE		FINISH		SPECIFICATION		CLASS		TYPE		GRADE		COLOR		THICKNESS			
																MAXIMUM		MINIMUM	
CODE	NAME	CODE	NAME	CODE	NUMBER FROM MIL-STD-35-2	CODE	NUMBER	CODE	NUMBER	CODE	NUMBER	CODE	NUMBER	CODE	NAME OR NUMBER FROM FED-STD-595	CODE	INCH	CODE	INCH
4541		4542		4543		4544		4545		4546		4547		4548		4549		4550	
4551		4552		4553		4554		4555		4556		4557		4558		4559		4560	
4561		4562		4563		4564		4565		4566		4567		4568		4569		4570	
4571		4572		4573		4574		4575		4576		4577		4578		4579		4580	
4581		4582		4583		4584		4585		4586		4587		4588		4589		4590	
4591		4592		4593		4594		4595		4596		4597		4598		4599		4600	
4601		4602		4603		4604		4605		4606		4607		4608		4609		4610	
4611		4612		4613		4614		4615		4616		4617		4618		4619		4620	
4621		4622		4623		4624		4625		4626		4627		4628		4629		4630	
4631		4632		4633		4634		4635		4636		4637		4638		4639		4640	
4641		4642		4643		4644		4645		4646		4647		4648		4649		4650	
4651		4652		4653		4654		4655		4656		4657		4658		4659		4660	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

(see 1.2.6)

DIMENSION		MINIMUM		MAXIMUM	
CODE	LEGEND	CODE	VALUE	CODE	VALUE
1010	AA	1011		1012	
1013	AB	1014		1015	
1016	AC	1017		1018	
1019	AD	1020		1021	
1022	AE	1023		1024	
1025	AF	1026		1027	
1028	AG	1029		1030	
1031	AH	1032		1033	
1034	AJ	1035		1036	
1037	AK	1038		1039	
1040	AL	1041		1042	
1043	AM	1044		1045	
1046	AN	1047		1048	
1049	AP	1050		1051	
1052	AQ	1053		1054	
1055	AR	1056		1057	
1058	AS	1059		1060	
1061	AT	1062		1063	
1064	AU	1065		1066	
1067	AV	1068		1069	
1070	AW	1071		1072	
1073	AX	1074		1075	
1076	AY	1077		1078	
1079	AZ	1080		1081	
1082	BA	1083		1084	
1085	BB	1086		1087	
1088	BC	1089		1090	
1091	BD	1092		1093	
1094	BE	1095		1096	
1097	BF	1098		1099	

DIMENSION		MINIMUM		MAXIMUM	
CODE	LEGEND	CODE	VALUE	CODE	VALUE
1100	BG	1101		1102	
1103	BH	1104		1105	
1106	BJ	1107		1108	
1109	BK	1110		1111	
1112	BL	1113		1114	
1115	BM	1116		1117	
1118	BN	1119		1120	
1121	BP	1122		1123	
1124	BQ	1125		1126	
1127	BR	1128		1129	
1130	BS	1131		1132	
1133	BT	1134		1135	
1136	BU	1137		1138	
1139	BV	1140		1141	
1142	BW	1143		1144	
1145	BX	1146		1147	
1148	BY	1149		1150	
1151	BZ	1152		1153	
1154	CA	1155		1156	
1157	CB	1158		1159	
1160	CC	1161		1162	
1163	CD	1164		1165	
1166	CE	1167		1168	
1169	CF	1170		1171	
1172	CG	1173		1174	
1175	CH	1176		1177	
1178	CJ	1179		1180	
1181	CK	1182		1183	
1184	CL	1185		1186	
1187	CM	1188		1189	

Specification Requirement Sheet must contain applicable Codes, Legends, and Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX A - DIMENSION CHARACTERISTIC TABLE

(see 1.2.6)

DIMENSION		MINIMUM		MAXIMUM	
CODE	LEGEND	CODE	VALUE	CODE	VALUE
1190	CN	1191		1192	
1193	CP	1194		1195	
1196	CQ	1197		1198	
1199	CR	1200		1201	
1202	CS	1203		1204	
1205	CT	1206		1207	
1208	CU	1209		1210	
1211	CV	1212		1213	
1214	CW	1215		1216	
1217	CX	1218		1219	
1220	CY	1221		1222	
1223	CZ	1224		1225	
1226	DA	1227		1228	
1229	DB	1230		1231	
1232	DC	1233		1234	
1235	DD	1236		1237	
1238	DE	1239		1240	
1241	DF	1242		1243	
1244	DG	1245		1246	
1247	DH	1248		1249	
1250	DJ	1251		1252	
1253	DK	1254		1255	
1256	DL	1257		1258	
1259	DM	1260		1261	
1262	DN	1263		1264	
1265	DP	1266		1267	
1268	DQ	1269		1270	
1271	DR	1272		1273	
1274	DS	1275		1276	
1277	DT	1278		1279	

DIMENSION		MINIMUM		MAXIMUM	
CODE	LEGEND	CODE	VALUE	CODE	VALUE
1280	DU	1281		1282	
1283	DV	1284		1285	
1286	DW	1287		1288	
1289	DX	1290		1291	
1292	DY	1293		1294	
1295	DZ	1296		1297	
1298	EA	1299		1300	
1301	EB	1302		1303	
1304	EC	1305		1306	
1307	ED	1308		1309	
1310	EE	1311		1312	
1313	EF	1314		1315	
1316	EG	1317		1318	
1319	EH	1320		1321	
1322	EJ	1323		1324	
1325	EK	1326		1327	
1328	EL	1329		1330	
1331	EM	1332		1333	
1334	EN	1335		1336	
1337	EP	1338		1339	
1340	EQ	1341		1342	
1343	ER	1344		1345	
1346	ES	1347		1348	
1349	ET	1350		1351	
1352	EU	1353		1354	
1355	EV	1356		1357	
1358	HT	1359		1360	
1361	ID	1362		1363	
1364	OD	1365		1366	
1367	TH	1368		1369	

Specification Requirement Sheet must contain applicable Codes, Legends, and Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX B - APPLICABLE DOCUMENTS

(see 1.2.9)

CHARACTER-ISTIC CODE	FEDERAL SPEC. NUMBER
6015	
6016	
6017	
6018	
6019	
6020	
6021	
6022	
6023	
6024	

CHARACTER-ISTIC CODE	MILITARY SPEC. NUMBER
6035	
6036	
6037	
6038	
6039	
6040	
6041	
6042	
6043	
6044	

CHARACTER-ISTIC CODE	FEDERAL STANDARD
6055	
6056	
6057	
6058	
6059	
6060	
6061	
6062	
6063	
6064	

CHARACTER-ISTIC CODE	MILITARY STANDARD
6075	
6076	
6077	
6078	
6079	
6080	
6081	
6082	
6083	
6084	

CHARACTER-ISTIC CODE	OTHER PUBLICATIONS
6095	
6096	
6097	
6098	
6099	
6100	

Specification Requirement Sheet must contain applicable Codes and Document Numbers

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX C - FIRST ARTICLE INSPECTION

(see 1.2.10)

GROUP NUMBER		TEST TITLE		NUMBER UNITS		ALLOWABLE FAILURES	
CODE	VALUE	CODE	VALUE	CODE	VALUE	CODE	VALUE
6125		6126		6127		6128	
6129		6130		6131		6132	
6133		6134		6135		6136	
6137		6138		6139		6140	
6141		6142		6143		6144	
6145		6146		6147		6148	
6149		6150		6151		6152	
6153		6154		6155		6156	
6157		6158		6159		6160	
6161		6162		6163		6164	
6165		6166		6167		6168	
6169		6170		6171		6172	
6173		6174		6175		6176	
6177		6178		6179		6180	
6181		6182		6183		6184	
6185		6186		6187		6188	
6189		6190		6191		6192	
6193		6194		6195		6196	
6197		6198		6199		6200	
6201		6202		6203		6204	
6205		6206		6207		6208	
6209		6210		6211		6212	
6213		6214		6215		6216	
6217		6218		6219		6220	
6221		6222		6223		6224	
6225		6226		6227		6228	
6229		6230		6231		6232	
6233		6234		6235		6236	
6237		6238		6239		6240	
6241		6242		6243		6244	
6245		6246		6247		6248	

Specification Requirement Sheet must contain Codes and applicable Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX D - GROUP A QUALITY CONFORMANCE INSPECTION

(see 1.2.10)

TEST TITLE		QUANTITY INSPECTED		AQL			
				MAJOR		MINOR	
CODE	VALUE	CODE	VALUE	CODE	VALUE	CODE	VALUE
6315		6316		6317		6318	
6319		6320		6321		6322	
6323		6324		6325		6326	
6327		6328		6329		6330	
6331		6332		6333		6334	
6335		6336		6337		6338	
6339		6340		6341		6342	
6343		6344		6345		6346	
6347		6348		6349		6350	
6351		6352		6353		6354	
6355		6356		6357		6358	
6359		6360		6361		6362	
6363		6364		6365		6366	
6367		6368		6369		6370	
6371		6372		6373		6374	
6375		6376		6377		6378	

Specification Requirement Sheet must contain Codes and applicable Values.

SOURCE TABLE

(see 1.2.63)

SOURCE(S)			
CODE	FSCM	CODE	MFG. PART NO.
5001		5002	
5003		5004	
5005		5006	
5007		5008	
5009		5010	
5011		5012	

Specification Requirement Sheet must contain Codes, FSCM and Part Number.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX E-1 - GROUP B QUALITY CONFORMANCE INSPECTION

(see 1.2.10)

TEST TITLE		FIXED SAMPLE PLAN			
		QUANTITY INSPECTED		DEFECTS ALLOWED	
CODE	VALUE	CODE	VALUE	CODE	VALUE
6410		6411		6412	
6413		6414		6415	
6416		6417		6418	
6419		6420		6421	
6422		6423		6424	
6425		6426		6427	
6428		6429		6430	
6431		6432		6433	
6434		6435		6436	
6437		6438		6439	
6440		6441		6442	
6443		6444		6445	
6446		6447		6448	
6449		6450		6451	
6452		6453		6454	
6455		6456		6457	
6458		6459		6460	
6461		6462		6463	
6464		6465		6466	
6467		6468		6469	
6470		6471		6472	
6473		6474		6475	
6476		6477		6478	
6479		6480		6481	
6482		6483		6484	

Specification Requirement Sheet must contain Codes and applicable Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX E-2 - GROUP B QUALITY CONFORMANCE INSPECTION

(see 1.2.10)

TEST TITLE		STATISTICAL SAMPLE PLAN			
		INSPECTION LEVEL		AQL	
CODE	VALUE	CODE	VALUE	CODE	VALUE
6410		6715		6716	
6413		6717		6718	
6416		6719		6720	
6419		6721		6722	
6422		6723		6724	
6425		6725		6726	
6428		6727		6728	
6431		6729		6730	
6434		6731		6732	
6437		6733		6734	
6440		6735		6736	
6443		6737		6738	
6446		6739		6740	
6449		6741		6742	
6452		6743		6744	
6455		6745		6746	
6458		6747		6748	
6461		6749		6750	
6464		6751		6752	
6467		6753		6754	
6470		6755		6756	
6473		6757		6758	
6476		6759		6760	
6479		6761		6762	
6482		6763		6764	

Specification Requirement Sheet must contain Codes and applicable Values.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX F - GROUP C QUALITY CONFORMANCE INSPECTION

(see 1.2.10)

TEST TITLE		QUANTITY INSPECTED		DEFECTS ALLOWED	
CODE	VALUE	CODE	VALUE	CODE	VALUE
6525		6526		6527	
6528		6529		6530	
6531		6532		6533	
6534		6535		6536	
6537		6538		6539	
6540		6541		6542	
6543		6544		6545	
6546		6547		6548	
6549		6550		6551	
6552		6553		6554	
6555		6556		6557	
6558		6559		6560	
6561		6562		6563	
6564		6565		6566	
6567		6568		6569	
6570		6571		6572	
6573		6574		6575	
6576		6577		6578	
6579		6580		6581	
6582		6583		6584	
6585		6586		6587	
6588		6589		6590	
6591		6592		6593	
6594		6595		6596	
6597		6598		6599	
6600		6601		6602	
6603		6604		6605	
6606		6607		6608	
6609		6610		6611	
6612		6613		6614	

Specification Requirement Sheet must contain Codes and applicable Values.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX G - QUALITY CONFORMANCE SEQUENCE TABLE

(see 1.2.10)

GROUP A TEST TITLE ADDED		GROUP A PRECEDING INSPECTION TEST	
CODE	VALUE	CODE	VALUE
6810		6811	
6812		6813	
6814		6815	
6816		6817	
6818		6819	
6820		6821	
6822		6823	
6824		6825	
6826		6827	
6828		6829	
6830		6831	
6832		6833	
6834		6835	
6836		6837	
6838		6839	

Specification Requirement Sheet must contain Codes and applicable Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX G - QUALITY CONFORMANCE SEQUENCE TABLE

(see 1.2.10)

GROUP B TEST TITLE ADDED		GROUP B PRECEDING INSPECTION TEST	
CODE	VALUE	CODE	VALUE
6840		6841	
6842		6843	
6844		6845	
6846		6847	
6848		6849	
6850		6851	
6852		6853	
6854		6855	
6856		6857	
6858		6859	
6860		6861	
6862		6863	
6864		6865	
6866		6867	
6868		6869	

Specification Requirement Sheet must contain Codes and applicable Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX G - QUALITY CONFORMANCE SEQUENCE TABLE

(see 1.2.10)

GROUP C TEST TITLE ADDED		GROUP C PRECEDING INSPECTION TEST	
CODE	VALUE	CODE	VALUE
6950		6951	
6952		6953	
6954		6955	
6956		6957	
6958		6959	
6960		6961	
6962		6963	
6964		6965	
6966		6967	
6968		6969	
6970		6971	
6972		6973	
6974		6975	
6976		6977	
6978		6979	

Specification Requirement Sheet must contain Codes and applicable Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX H - DELETED TEST TABLE
(When specific tests are not required)

(see 1.2.10)

GROUP A DELETED TEST TITLE		GROUP B DELETED TEST TITLE		GROUP C DELETED TEST TITLE	
CODE	VALUE	CODE	VALUE	CODE	VALUE
6875		6890		6905	
6876		6891		6906	
6877		6892		6907	
6878		6893		6908	
6879		6894		6909	
6880		6895		6910	
6881		6896		6911	
6882		6897		6912	
6883		6898		6913	
6884		6899		6914	
6885		6900		6915	
6886		6901		6916	
6887		6902		6917	
6888		6903		6918	
6889		6904		6919	

Specification Requirement Sheet must contain applicable Codes and Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX J - DELETED FIRST ARTICLE TESTS

(see 1.2.10)

FIRST ARTICLE DELETED TEST TITLE	
CODE	*VALUE*
6980	
6981	
6982	
6983	
6984	
6985	
6986	
6987	
6988	
6989	

Specification Requirement Sheet must contain Codes and applicable Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX S - SOURCE TABULATION TABLE

(see 1.2.63)

CODE	DASH NO.	CODE	FSCM	CODE	MFG. PART NO.
9051		9151		9451	
		9152		9452	
		9153		9453	
		9154		9454	
		9155		9455	
		9156		9456	
9052		9157		9457	
		9158		9458	
		9159		9459	
		9160		9460	
		9161		9461	
		9162		9462	
9053		9163		9463	
		9164		9464	
		9165		9465	
		9166		9466	
		9167		9467	
		9168		9468	
9054		9169		9469	
		9170		9470	
		9171		9471	
		9172		9472	
		9173		9473	
		9174		9474	
9055		9175		9475	
		9176		9476	
		9177		9477	
		9178		9478	
		9179		9479	
		9180		9480	

CODE	DASH NO.	CODE	FSCM	CODE	MFG. PART NO.
9056		9181		9481	
		9182		9482	
		9183		9483	
		9184		9484	
		9185		9485	
		9186		9486	
9057		9187		9487	
		9188		9488	
		9189		9489	
		9190		9490	
		9191		9491	
		9192		9492	
9058		9193		9493	
		9194		9494	
		9195		9495	
		9196		9496	
		9197		9497	
		9198		9498	
9059		9199		9499	
		9200		9500	
		9201		9501	
		9202		9502	
		9203		9503	
		9204		9504	
9060		9205		9505	
		9206		9506	
		9207		9507	
		9208		9508	
		9209		9509	
		9210		9510	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX S - SOURCE TABULATION TABLE

(see 1.2.63)

CODE	DASH NO.	CODE	FSCM	CODE	MFG. PART NO.
9061		9211		9511	
		9212		9512	
		9213		9513	
		9214		9514	
		9215		9515	
		9216		9516	
9062		9217		9517	
		9218		9518	
		9219		9519	
		9220		9520	
		9221		9521	
		9222		9522	
9063		9223		9523	
		9224		9524	
		9225		9525	
		9226		9526	
		9227		9527	
		9228		9528	
9064		9229		9529	
		9230		9530	
		9231		9531	
		9232		9532	
		9233		9533	
		9234		9534	
9065		9235		9535	
		9236		9536	
		9237		9537	
		9238		9538	
		9239		9539	
		9240		9540	

CODE	DASH NO.	CODE	FSCM	CODE	MFG. PART NO.
9066		9241		9541	
		9242		9542	
		9243		9543	
		9244		9544	
		9245		9545	
		9246		9546	
9067		9247		9547	
		9248		9548	
		9249		9549	
		9250		9550	
		9251		9551	
		9252		9552	
9068		9253		9553	
		9254		9554	
		9255		9555	
		9256		9556	
		9257		9557	
		9258		9558	
9069		9259		9559	
		9260		9560	
		9261		9561	
		9262		9562	
		9263		9563	
		9264		9564	
9070		9265		9565	
		9266		9566	
		9267		9567	
		9268		9568	
		9269		9569	
		9270		9570	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

(see 1.2.63)

APPENDIX S - SOURCE TABULATION TABLE

CODE	DASH NO.	CODE	FSCM	CODE	MFG. PART NO.
9071		9271		9571	
		9272		9572	
		9273		9573	
		9274		9574	
		9275		9575	
		9276		9576	
9072		9277		9577	
		9278		9578	
		9279		9579	
		9280		9580	
		9281		9581	
		9282		9582	
9073		9283		9583	
		9284		9584	
		9285		9585	
		9286		9586	
		9287		9587	
		9288		9588	
9074		9289		9589	
		9290		9590	
		9291		9591	
		9292		9592	
		9293		9593	
		9294		9594	
9075		9295		9595	
		9296		9596	
		9297		9597	
		9298		9598	
		9299		9599	
		9300		9600	

CODE	DASH NO.	CODE	FSCM	CODE	MFG. PART NO.
9076		9301		9601	
		9302		9602	
		9303		9603	
		9304		9604	
		9305		9605	
		9306		9606	
9077		9307		9607	
		9308		9608	
		9309		9609	
		9310		9610	
		9311		9611	
		9312		9612	
9078		9313		9613	
		9314		9614	
		9315		9615	
		9316		9616	
		9317		9617	
		9318		9618	
9079		9319		9619	
		9320		9620	
		9321		9621	
		9322		9622	
		9323		9623	
		9324		9624	
9080		9325		9625	
		9326		9626	
		9327		9627	
		9328		9628	
		9329		9629	
		9330		9630	

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX S - SOURCE TABULATION TABLE

(see 1.2.63)

CODE	DASH NO.	CODE	FSCM	CODE	MFG. PART NO.
9081		9331		9631	
		9332		9632	
		9333		9633	
		9334		9634	
		9335		9635	
		9336		9636	
9082		9337		9637	
		9338		9638	
		9339		9639	
		9340		9640	
		9341		9641	
		9342		9642	
9083		9343		9643	
		9344		9644	
		9345		9645	
		9346		9646	
		9347		9647	
		9348		9648	
9084		9349		9649	
		9350		9650	
		9351		9651	
		9352		9652	
		9353		9653	
		9354		9654	
9085		9355		9655	
		9356		9656	
		9357		9657	
		9358		9658	
		9359		9659	
		9360		9660	

CODE	DASH NO.	CODE	FSCM	CODE	MFG. PART NO.
9086		9361		9661	
		9362		9662	
		9363		9663	
		9364		9664	
		9365		9665	
		9366		9666	
9087		9367		9667	
		9368		9668	
		9369		9669	
		9370		9670	
		9371		9671	
		9372		9672	
9088		9373		9673	
		9374		9674	
		9375		9675	
		9376		9676	
		9377		9677	
		9378		9678	
9089		9379		9679	
		9380		9680	
		9381		9681	
		9382		9682	
		9383		9683	
		9384		9684	
9090		9385		9685	
		9386		9686	
		9387		9687	
		9388		9688	
		9389		9689	
		9390		9690	

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX S - SOURCE TABULATION TABLE

(see 1.2.63)

CODE	DASH NO.	CODE	FSCM	CODE	MFG. PART NO.
9091		9391		9691	
		9392		9692	
		9393		9693	
		9394		9694	
		9395		9695	
		9396		9696	
9092		9397		9697	
		9398		9698	
		9399		9699	
		9400		9700	
		9401		9701	
		9402		9702	
9093		9403		9703	
		9404		9704	
		9405		9705	
		9406		9706	
		9407		9707	
		9408		9708	
9094		9409		9709	
		9410		9710	
		9411		9711	
		9412		9712	
		9413		9713	
		9414		9714	
9095		9415		9715	
		9416		9716	
		9417		9717	
		9418		9718	
		9419		9719	
		9420		9720	

CODE	DASH NO.	CODE	FSCM	CODE	MFG. PART NO.
9096		9421		9721	
		9422		9722	
		9423		9723	
		9424		9724	
		9425		9725	
		9426		9726	
9097		9427		9727	
		9428		9728	
		9429		9729	
		9430		9730	
		9431		9731	
		9432		9732	
9098		9433		9733	
		9434		9734	
		9435		9735	
		9436		9736	
		9437		9737	
		9438		9738	
9099		9439		9739	
		9440		9740	
		9441		9741	
		9442		9742	
		9443		9743	
		9444		9744	
9100		9445		9745	
		9446		9746	
		9447		9747	
		9448		9748	
		9449		9749	
		9450		9750	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 1.3

CONFIGURATION AND DRAWINGS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 1.3.1 FIGURE TITLES VS FIGURE NUMBERS

Figure Title	Figure Number
Antenna Body Styles - Slot	Ø92-Ø1-1
Antenna Body Style - Cavity	Ø92-Ø1-2
Antenna Body Styles - Stub	Ø92-Ø1-3
Antenna Body Styles - Loop	Ø92-Ø1-4
Antenna Body Styles - Dipole	Ø92-Ø1-5 and -6
Antenna Body Styles - Array	Ø92-Ø1-7
Antenna Body Styles - Blade	Ø92-Ø1-8
Antenna Body Style - Whip	Ø92-Ø1-9
Antenna Body Style - Flush	Ø92-Ø1-1Ø
Antenna Body Style - S-Band Stub	Ø92-Ø1-11
Antenna Body Style - Discone	Ø92-Ø1-12
Mounting Base Configuration	Ø92-Ø2-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 1.3.2 LEGEND INDEX

AA	Overall Length
AB	Body Length
AC	Overall Width
AD	Width
AE	Overall Height
AF	Height
AG	Overall Diameter
AH	Diameter
AK	Body Width
AL	Base Height
AN	Mounting Hole Diameter
AP	Distance Between Mounting Holes
AQ	Mounting Base Overall Length
AR	Mounting Slot Length
AS	Mounting Base Overall Width
AT	Mounting Slot Width
AU	Mounting Base Overall Diameter
AV	Mounting Slot Diameter
AW	Chamfer
AX	Radius
AY	Mounting Base Thickness

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

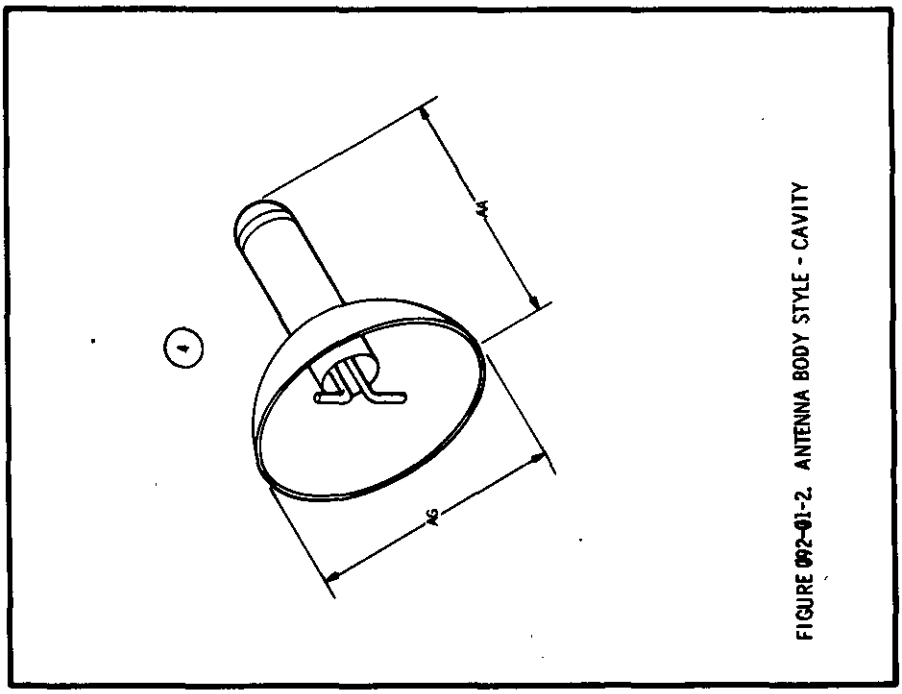


FIGURE 092-01-2. ANTENNA BODY STYLE - CAVITY

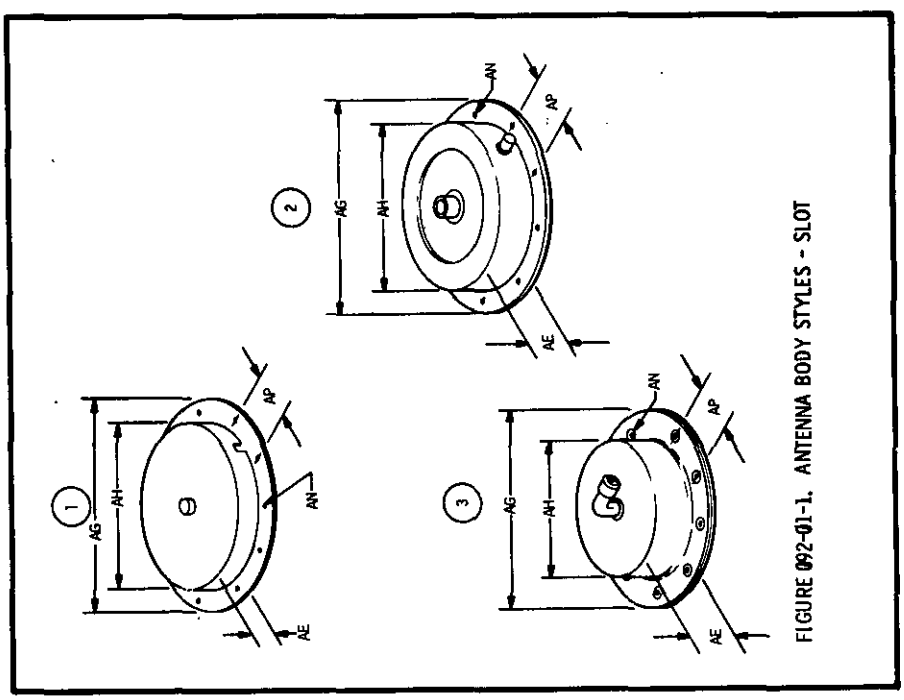


FIGURE 092-01-1. ANTENNA BODY STYLES - SLOT

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

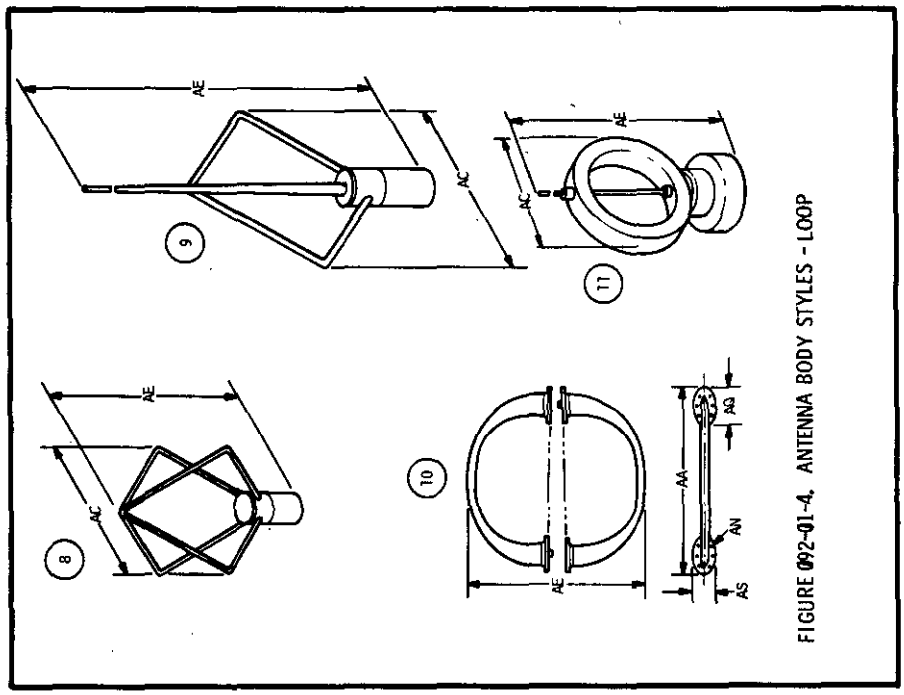


FIGURE 002-01-4. ANTENNA BODY STYLES - LOOP

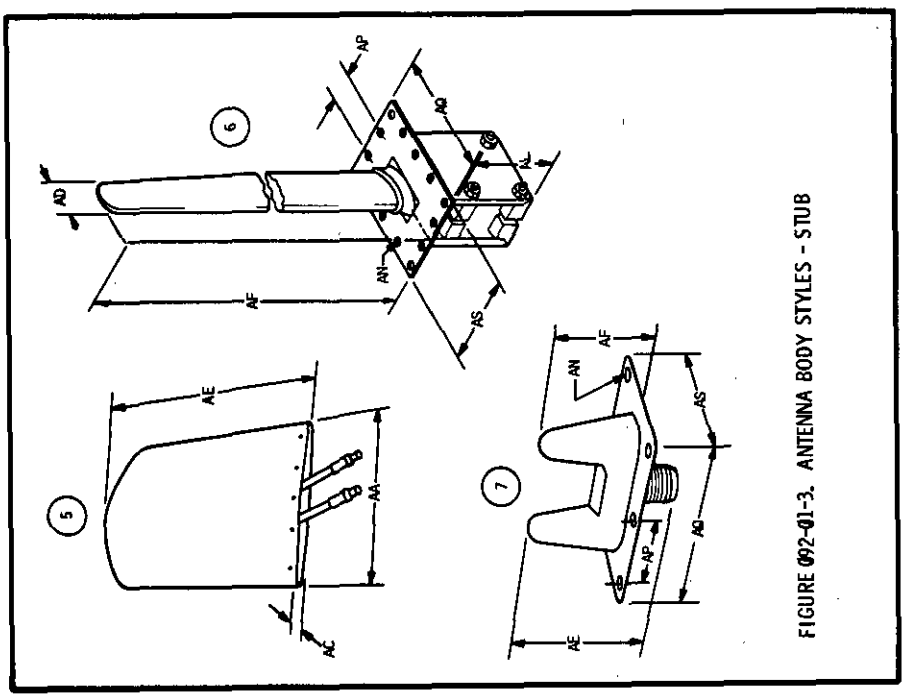


FIGURE 002-01-3. ANTENNA BODY STYLES - STUB

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

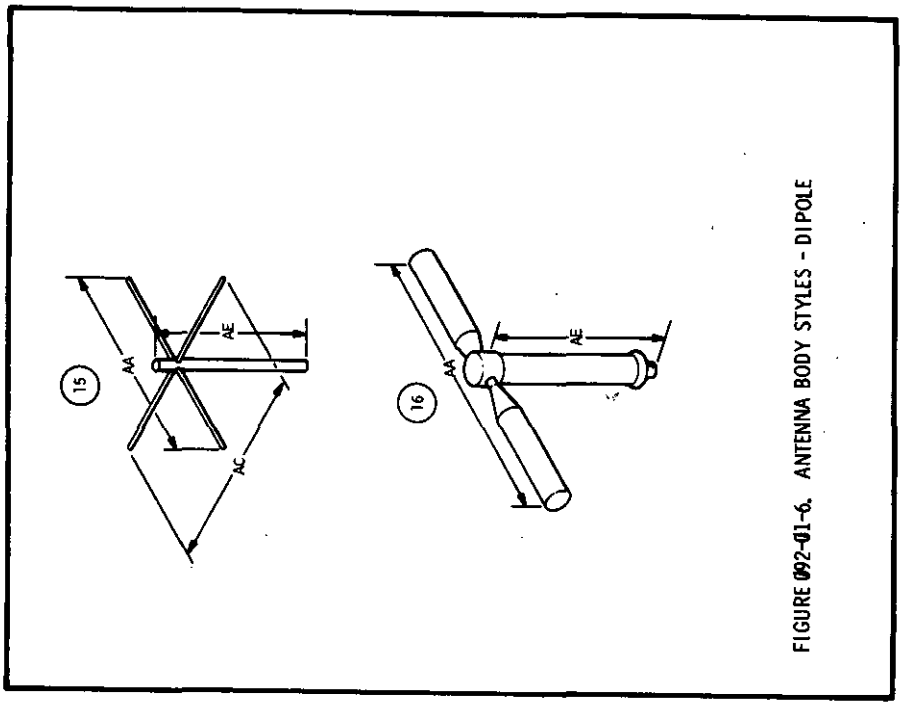


FIGURE 092-01-6. ANTENNA BODY STYLES - DIPOLE

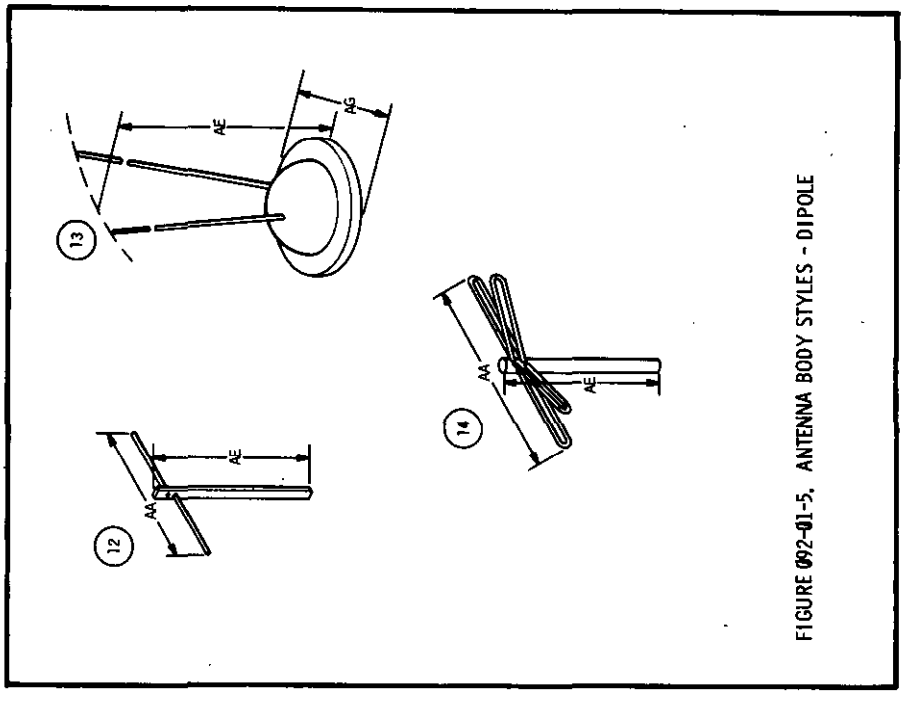


FIGURE 092-01-5. ANTENNA BODY STYLES - DIPOLE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

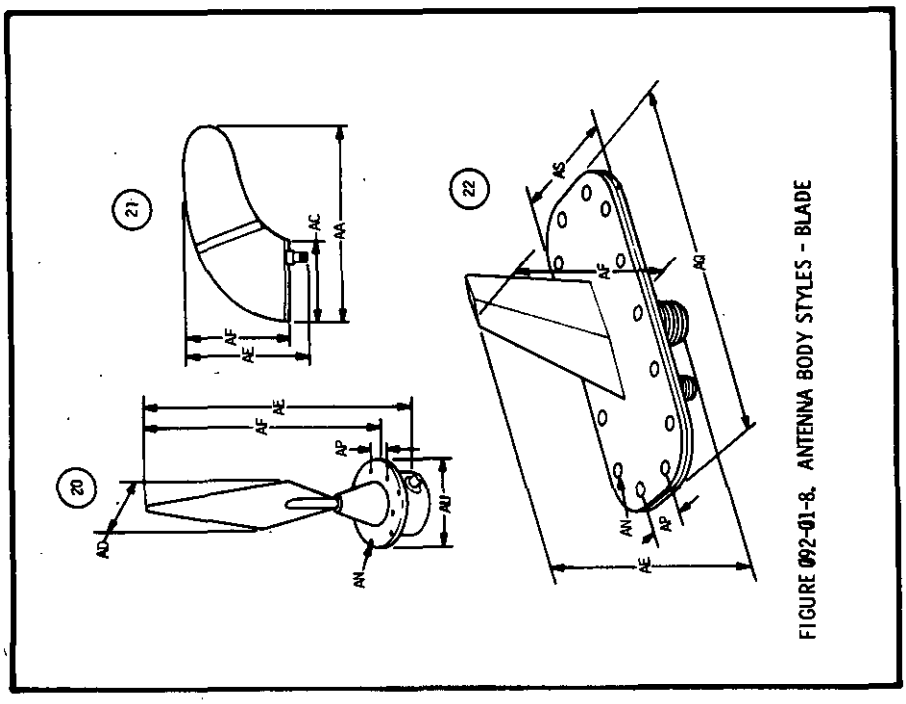


FIGURE 092-01-8. ANTENNA BODY STYLES - BLADE

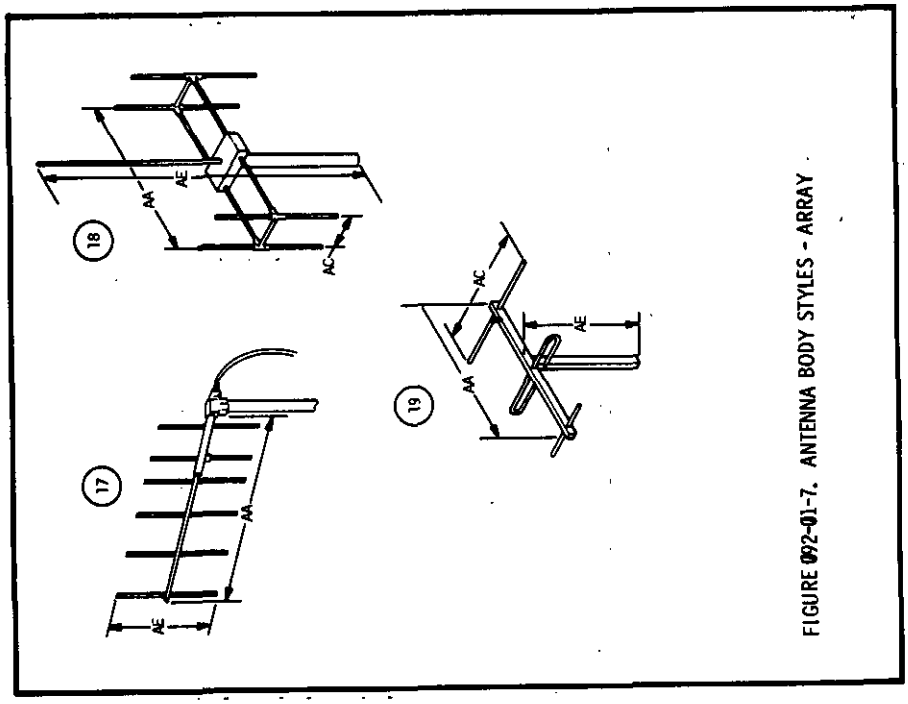


FIGURE 092-01-7. ANTENNA BODY STYLES - ARRAY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

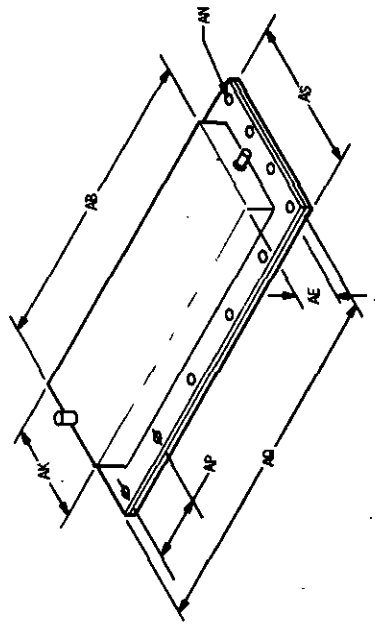


FIGURE 092-01-10. ANTENNA BODY STYLE - FLUSH

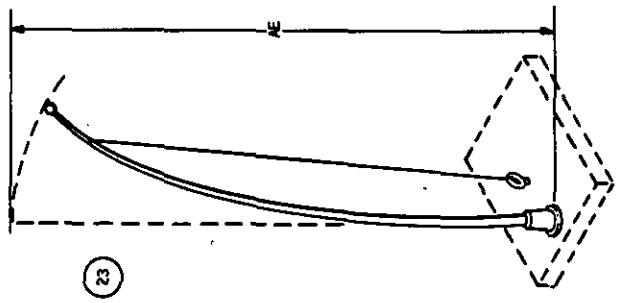


FIGURE 092-01-9. ANTENNA BODY STYLE - WHIP

Source: https://assist.dla.mil downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

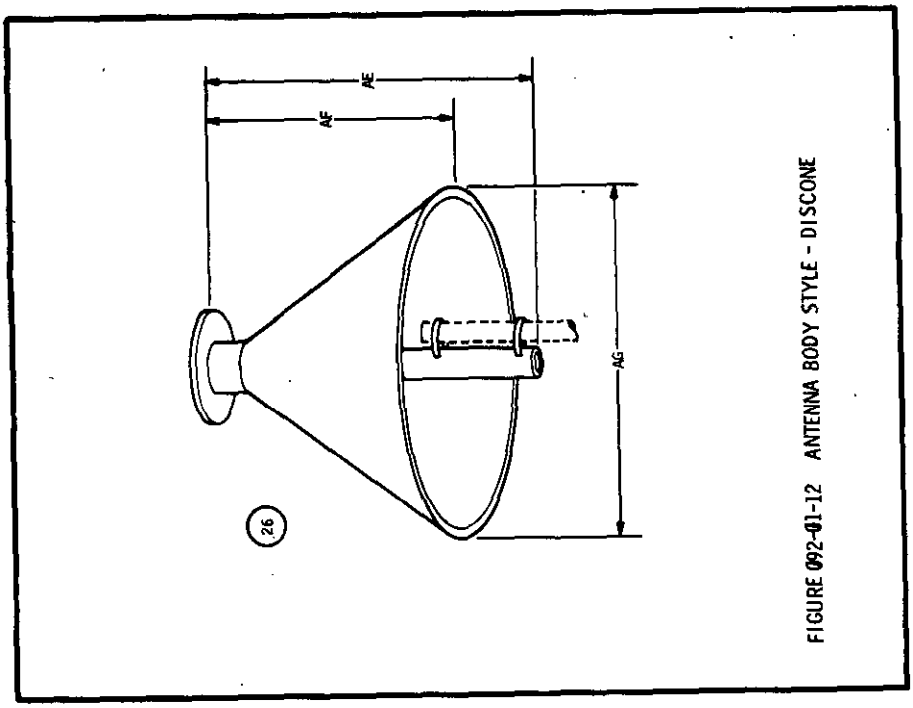


FIGURE 092-01-12 ANTENNA BODY STYLE - DISCONE

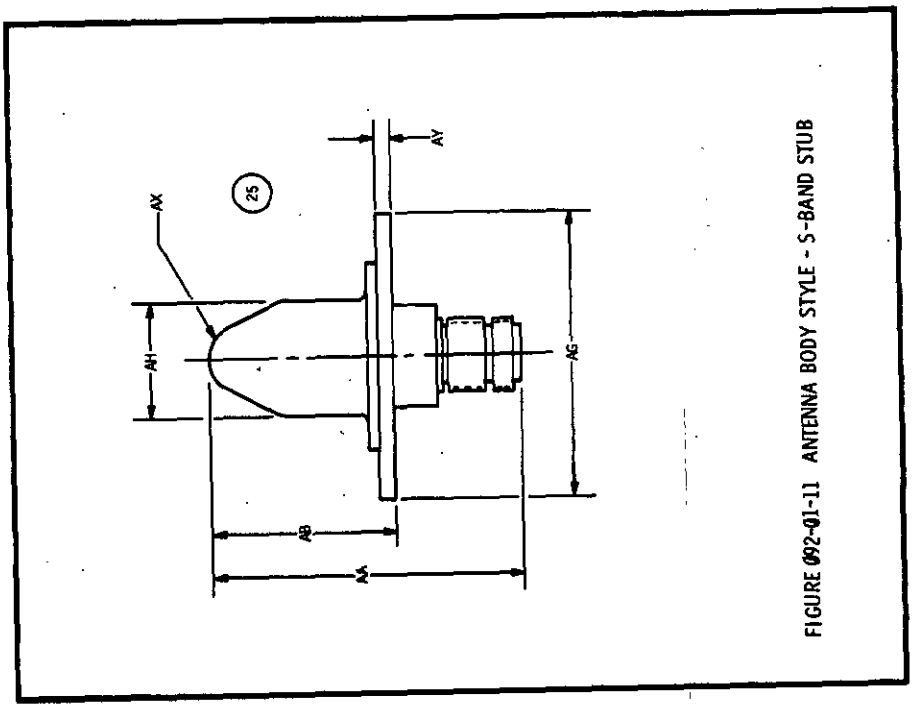


FIGURE 092-01-11 ANTENNA BODY STYLE - S-BAND STUB

☆ U.S. GOVERNMENT PRINTING OFFICE: 1974— 713-166/1720

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS SPACE INTENTIONALLY
LEFT BLANK

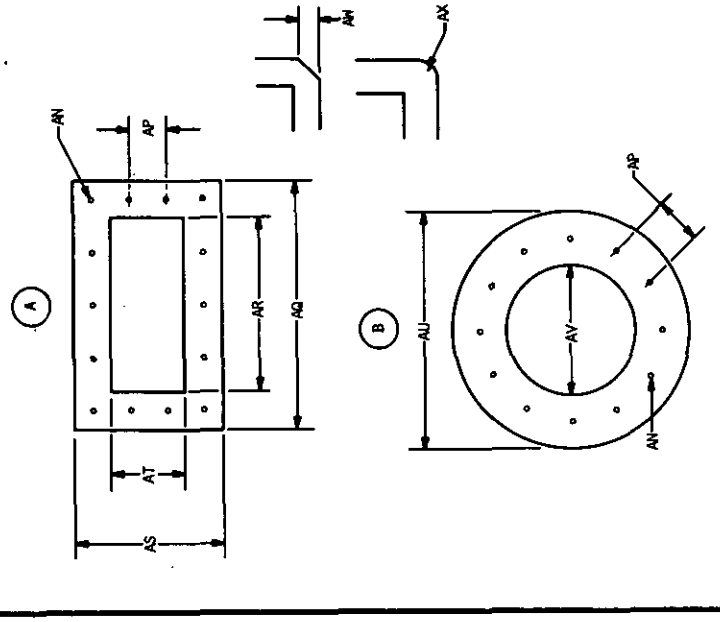


FIGURE 092-02-1. MOUNTING BASE CONFIGURATION

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of MIL-STD-35-43 (MI), dated 1 May 1974 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of MIL-STD-35-43 (MI), dated 1 May 1974 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of MIL-STD-35-43 (MI), dated 1 May 1974 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-STD-35-43(MI), AEDPS, Antennas

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Missile Command
ATTN: AMSMI-RCS
Redstone Arsenal, AL 35809

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.