MIL-STD-35-49A(MI)
28 September 1984
SUPERSEDING
MIL-STD-35-49(MI)
17 JUNE 1974

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

GEARS

NO DELIVERABLE DATA
REQUIRED BY THIS DOCUMENT

AREA-EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Gears
Automated Engineering
Document Preparation System

MIL-STD-35-49A(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Command, ATTN: DRSMI-EDC, Redstone Arsenal, Alabama 35898, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-49A(MI) is to provide instructions for the preparation of Specifications Requirements Sheets (SRS) in order to produce Military Specification Exceptions for Gears.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedure described in the basic document (DOD-STD-35) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	3
	2.1	Issues of documents	3
	2.2	Other publications	4
	3.	DEFINITIONS	5
	4.	GENERAL REQUIREMENTS	6
	4.1	Introduction	6
	4.2	Specification Requirement Sheet (SRS)	6
	4.3	Configuration	6
	4.3.1	Dimensions	6
	4.3.2	Illustrations	6
	4.4	Units of measure	6
	5.	DETAILED REQUIREMENTS	7
	5.1	Introduction	7
	5.2	MSE Formats	7
	5.3	Referenced documents	7
	5.4	Tabulation	7
	5.5	Keyword Code Index (KCI) and Standard Paragraphs	9
	5.5.1	Interrelationship of Codes	9
	5.5.2	Automatic MSE Data	9
	5.5.3	DOD-STD-35 Tables	9

TABLES

Table	I.	Title Index	2
	II.	Tabulation candidates	8

APPENDICES

Appendix	A.	Illustrations	71
	b.	Characteristic Code Index	115
		Index	118

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS) provides detailed requirements for the preparation of Military Specifications Exception (MSE) documentation for Gears.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate a MSE by automated data processing.

1.3 Utilization. General instruction, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35.

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for a MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSEs for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on a SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for a MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
Gear, Spur	113001	NAS726	GEARS
Gear Set, Spur	113002	NAS726	GEARS
Gear, Helical	113003	NAS726	GEARS
Gear Set, Helical	113004	NAS726	GEARS
Gear, Herringbone	113005	NAS726	GEARS
Gear Set, Herringbone	113006	NAS726	GEARS
Gear, Bevel	113007	NAS726	GEARS
Gear Set, Bevel	113008	NAS726	GEARS
Gear, Bevel, Hypoid	113009	NAS726	GEARS
Gear Set, Bevel, Hypoid	113010	NAS726	GEARS
Gear, Worm	113011	NAS726	GEARS
Gear Set, Worm	113012	NAS726	GEARS
Gear Rack	113013	NAS726	GEARS
Gear, Cluster	113014	NAS726	GEARS
Gear, Anti-Backlash	113015	NAS726	GEARS

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

FEDERAL

QQ-P-416	Plating Cadmium (Electro-Deposited)

MILITARY

MIL-I-17214	Indicator, Permeability Low Mu-Go-No-Go

STANDARDS

FEDERAL

FED-STD-151	Metal, Test Methods

(Copies of specifications, standards, drawings, and publications required by contractor in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AGMA201.02	TOOTH PROPORTIONS FOR COARSE-PITCH INVOLUTE SPUR GEARS
AGMA203.03	FINE PITCH ON-CENTER FACE GEARS FOR 20 DEGREE INVOLUTE SPUR PINIONS
AGMA207.06	TOOTH PROPORTIONS FOR FINE-PITCH INVOLUTE SPUR AND HELICAL GEARS
AGMA208.03	SYSTEM FOR STRAIGHT BEVEL GEARS
AGMA209.04	SYSTEM FOR SPIRAL BEVEL GEARS
AGMA374.04	DESIGN MANUAL FOR FINE-PITCH GEARING
AGMA390.03	AGMA GEAR HANDBOOK-VOLUME 1-GEAR CLASSIFICATION, MATERIALS AND MEASURING METHODS FOR UNASSEMBLED GEARS

(Application for copies should be addressed to the American Gear Manufacturers Association, 1901 North Fort Myer Drive, Arlington, Va. 22209)

ANSIB6.1	TOOTH PROPORTIONS FOR COARSE-PITCH INVOLUTE SPUR GEARS
ANSIB6.7	TOOTH PROPORTIONS FOR FINE-PITCH INVOLUTE SPUR AND HELICAL GEARS
ANSIB6.13	STRAIGHT BEVEL GEARS, SYSTEM FOR
NAS726	GEAR-SPUR, 20 DEGREE INVOLUTE, LOW INERTIA, 48 AND FINER PITCH
NAS727	GEAR-SPUR, 20 DEGREE INVOLUTE, LOW INERTIA, 48 AND FINER PITCH

(Application for copies should be addressed to the American National Standards Institute, Inc., 1430 Broadway, New York, N.Y. 10018.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

3.1 Definitions contained in DOD-STD-35 are applicable to Gears.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare a SRS for Gears, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Gears.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Gears.

4.3.2 Illustrations. Illustrations applicable to Gears are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table II provides codes for column heading which may be used for Gear characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either inches or millimeters.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE II. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1574	NOMINAL PITCH DIA INCH	1576	MINIMUM PITCH DIA INCH	1578	MAXIMUM PITCH DIA INCH
1670	NOMINAL OPERATING SPEED RPM	1674	MINIMUM OPERATING SPEED RPM	1676	MAXIMUM OPERATING SPEED RPM
1694	SUSTAINING TORQUE FT/LB	1696	SUSTAINING TORQUE IN/LB	1792	NOMINAL BACKLASH MICROINCH
1794	MAXIMUM BACKLASH	1796	MINIMUM BACKLASH	1925	NUMBER OF TEETH
1927	NOMINAL PITCH DIA MILLIMETER	1929	MAXIMUM PITCH DIA MILLIMETER	1931	MINIMUM PITCH DIA MILLIMETER
1933	MAXIMUM PWR XFER HP	1935	MINIMUM PWR XFER HP	1937	MAXIMUM TORQ XFER FT/LB
1939	MAXIMUM TORQ XFER NM	1940	MINIMUM TORQ XFER IN/LB	1942	MINIMUM TORQUE NM
1944	SUSTAINING TORQUE NM	1950	NOMINAL BACKLASH MILLIMETER	1952	MAXIMUM BACKLASH MILLIMETER
1954	MINIMUM BACKLASH MILLIMETER				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.5 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on a SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Charateristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.5.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.5.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.5.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME

*REQUESTER'S NAME

*COMPANY NAME/COMMAND

*STREET/BUILDING

*CITY, STATE, ZIP

*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE

*REQUESTER FSCM

*CONTRACT NUMBER/OFFICE SYMBOL

*BASE DOCUMENT

*SYSTEM APPLICATION

*GOVERNMENT DESIGN ACTIVITY FSCM

*FORMAT (SELECT ONE)

SIX SECTION DOCUMENT.

ONE SECTION DOCUMENT.

*CONTROL (SELECT ONE)

SOURCE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	CHAR CODE	STANDARD PARAGRAPH
0101	0101	0101.
0102	0102	0102.
0103	0103	0103.
0104	0104	0104.
0105	0105	0105.
1004	1004	1004.
1005	1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	1008	SYSTEM APPLICATION 1008.
6369	6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	0700	
0800	0800	
		SOURCE(S).
6873	6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME

CONTROL (CONT)

SPECIFICATION.

*SOURCE TABLE

NOTE: REFER TO TABLE V OF DOD-STD-35.

APERTURE CARDS REQUIRED.

REVISION OF AEDPS DOCUMENT NUMBER

SCOPE

NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.

PART NUMBER

NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.

NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	CHAR CODE	STANDARD PARAGRAPH
6874	6874	THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).
0107	0107	
0108	0108	0108. SCOPE. SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.
		PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.
		PART NUMBER. THE PART NUMBER FOR THE ITEMS IS (THE SAME AS THE NUMBER OF THIS DOCUMENT) PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME

UNITS OF MEASURE (SELECT ONE)

U.S.

SI.

CONFIGURATION

(ILLUSTRATION NUMBER), SEE APPENDIX A

DIMENSION TABLE, (SEE TABLE III, DOD-STD-35)

*UNITS (SELECT ONE)

U.S.

(INCHES)

SI

(MILLIMETERS)

ILLUSTRATIONS

(NUMBER), SEE APPENDIX A

NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	CHAR CODE	STANDARD PARAGRAPH
6941	6941	UNITS OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES.
6942	6942	UNITS OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES.
		CONFIGURATION.
1009	1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7577	7577	ALL DIMENSIONS, UNLESS OTHERWISED SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
4950	4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME

TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)

MATERIALS (SEE TABLE VI, DOD-STD-35)

NOTE: AUTOMATIC WHEN TABLE VI IS USED.

FINISHES (SEE TABLE VII, DOD-STD-35)

NOTE: AUTOMATIC WHEN TABLE VII IS USED.

METALS

DISSIMILAR METALS.

DESIGN AND CONSTRUCTION

GEAR BODY STYLE

(STYLE)

NUMBER OF GEAR TEETH

GEAR ONE (NUMBER OF TEETH)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	CHAR CODE	STANDARD PARAGRAPH
		MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
		FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
7580	7580	METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.
		DESIGN AND CONSTRUCTION
		GEAR BODY STYLE.
1566	1566	THE GEAR BODY STYLE SHALL BE 1566.
		NUMBER OF GEAR TEETH.
1562	1562	GEAR NUMBER ONE SHALL HAVE 1562 TEETH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME

DESIGN AND CONSTRUCTION (CONT)

NUMBER OF GEAR TEETH (CONT)

GEAR TWO (NUMBER OF TEETH)

GEAR THREE (NUMBER OF TEETH)

GEAR FOUR (NUMBER OF TEETH)

GEAR (NUMBER OF TEETH)

GEAR SHAFT ASSEMBLY STYLES

GEAR (STYLE)

MATING GEAR (STYLE)

GEAR HUB STYLES

FACE 'A' (STYLE)

FACE 'B' (STYLE)

MATING GEAR FACE 'A' (STYLE)

MATING GEAR FACE 'B' (STYLE)

GEAR BORE STYLE

GEAR (STYLE)

MATING GEAR (STYLE)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	CHAR CODE	STANDARD PARAGRAPH
1563	1563	GEAR NUMBER TWO SHALL HAVE 1563 TEETH.
1564	1564	GEAR NUMBER THREE SHALL HAVE 1564 TEETH.
1565	1565	GEAR NUMBER FOUR SHALL HAVE 1565 TEETH.
1925	1925	THE GEAR SHALL HAVE 1925 TEETH.
		GEAR SHAFT ASSEMBLY STYLES.
1580	1580	THE GEAR SHAFT ASSEMBLY SHALL CONFORM TO STYLE 1580.
1582	1582	THE GEAR SHAFT ASSEMBLY FOR THE MATING GEAR SHALL CONFORM TO SYLE 1582.
		GEAR HUB STYLES.
1600	1600	THE GEAR HUB STYLE FOR FACE 'A' SHALL CONFORM TO STYLE 1600.
1604	1604	THE GEAR HUB STYLE FOR FACE 'B' SHALL CONFORM TO STYLE 1604.
1608	1608	THE GEAR HUB STYLE FOR FACE 'A' OF THE MATING GEAR SHALL CONFORM TO STYLE 1608.
1612	1612	THE GEAR HUB STYLE FOR FACE 'B' OF THE MATING GEAR SHALL CONFORM TO STYLE 1612.
		GEAR BORE STYLES.
1620	1620	THE GEAR BORE STYLE SHALL CONFORM TO STYLE 1620.
1624	1624	THE GEAR BORE STYLE FOR THE MATING GEAR SHALL CONFORM TO STYLE 1624.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME

DESIGN AND CONSTRUCTION (CONT)

GEAR LIGHTENING HOLES

GEAR HOLES (ILLUSTRATION)

MATING GEAR HOLES (ILLUSTRATION)

GEAR SPOKES

GEAR SPOKE DIMENSION (ILLUSTRATION)

MATING GEAR SPOKE DIMENSION (ILLUSTRATION)

GEAR BLANKS

GEAR PER NAS726 (DASH NUMBER)

MATING GEAR PER NAS726 (DASH NUMBER)

PITCH DIAMETER

NOMINAL PITCH DIAMETER (SELECT ONE)

U.S.

(INCH)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	CHAR CODE	STANDARD PARAGRAPH
		GEAR LIGHTENING HOLES.
1630	1630	THE GEAR LIGHTENING HOLES SHALL BE IN ACCORDANCE WITH THE APPLICABLE DIMENSIONS OF ILLUSTRATION 1630.
1632	1632	THE GEAR LIGHTENING HOLES FOR THE MATING GEAR SHALL BE IN ACCORDANCE WITH THE APPLICABLE DIMENSIONS OF ILLUSTRATION 1632.
		GEAR SPOKES.
1640	1640	THE GEAR SPOKES SHALL CONFORM TO THE APPLICABLE DIMENSIONS OF ILLUSTRATION 1640.
1642	1642	THE GEAR SPOKES FOR THE MATING GEAR SHALL CONFORM TO THE APPLICABLE DIMENSIONS OF ILLUSTRATION 1642.
		GEAR BLANKS.
1650	1650	THE GEAR BLANK SHALL BE IN ACCORDANCE WITH NAS726, DASH NUMBER 1650.
1652	1652	THE GEAR BLANK FOR THE MATING GEAR SHALL BE IN ACCORDANCE WITH NAS726, DASH NUMBER 1652.
		PITCH DIAMETER.
1574	1574	THE PITCH DIAMETER SHALL BE 1574 INCH(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME

DESIGN AND CONSTRUCTION (CONT)

NOMINAL PITCH DIAMETER (CONT)

SI

(MILLIMETER)

MAXIMUM PITCH DIAMETER (SELECT ONE)

U.S.

(INCH)

SI

(MILLIMETER)

MINIMUM PITCH DIAMETER (SELECT ONE)

U.S.

(INCH)

SI

(MILLIMETER)

OPERATING PARAMETERS

SPEED

NOMINAL (RPM)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	CHAR CODE	STANDARD PARAGRAPH
1927	1927	THE PITCH DIAMETER SHALL BE 1927 MILLIMETER(S).
1578	1578	THE PITCH DIAMETER SHALL BE NOT GREATER THAN 1578 INCH(S).
1929	1929	THE PITCH DIAMETER SHALL BE NOT GREATER THAN 1929 MILLIMETER(S).
1576	1576	THE PITCH DIAMETER SHALL BE NOT LESS THAN 1576 INCH(S).
1931	1931	THE PITCH DIAMETER SHALL BE NOT LESS THAN 1931 MILLIMETER(S).
		OPERATING PARAMETERS.
		SPEED.
1670	1670	THE NOMINAL OPERATING SPEED OF THE GEAR SHALL BE 1670 RPM.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME

DESIGN AND CONSTRUCTION (CONT)

SPEED (CONT)

MAXIMUM (RPM)

MINIMUM (RPM)

TRANSMITTED POWER

MAXIMUM (HP)

MINIMUM (HP)

MAXIMUM TORQUE (SELECT ONE)

U.S.

(FOOT-POUND)

SI

(NEWTON-METER)

MINIMUM TORQUE (SELECT ONE)

U.S.

(INCH-POUND)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	CHAR CODE	STANDARD PARAGRAPH
1676	1676	THE OPERATING SPEED OF THE GEAR SHALL BE NOT GREATER THAN 1676 RPM.
1674	1674	THE OPERATING SPEED OF THE GEAR SHALL BE NOT LESS THAN 1674 RPM.
		TRANSMITTED POWER.
1933	1933	THE POWER TRANSMITTED BY THE GEAR SHALL BE NOT GREATER THAN 1933 HP.
1935	1935	THE POWER TRANSMITTED BY THE GEAR SHALL BE NOT LESS THAN 1935 HP.
1937	1937	THE TORQUE TRANSMITTED BY THE GEAR SHALL BE NOT GREATER THAN 1937 FOOT-POUND(S).
1939	1939	THE TORQUE TRANSMITTED BY THE GEAR SHALL BE NOT GREATER THAN 1939 NEWTON-METER.
1940	1940	THE TORQUE TRANSMITTED BY THE GEAR SHALL BE NOT LESS THAN 1940 INCH-POUND(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME

DESIGN AND CONSTRUCTION (CONT)

MINIMUM TORQUE (CONT)

SI

(NEWTON-METER)

PERIOD OF OPERATION (SELECT ONE)

CONTINUOUS.

INTERMITTENTLY (HOURS)

STATIC TORQUE (SELECT ONE)

U.S. (SELECT ONE)

(INCH-POUND)

(FOOT-POUND)

SI

(NEWTON-METER)

GEAR MANUFACTURING METHOD

MILLING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	CHAR CODE	STANDARD PARAGRAPH
1942	1942	THE TORQUE TRANSMITTED BY THE GEAR SHALL BE NOT LESS THAN 1942 NEWTON-METER.
		PERIOD OF OPERATION.
1690	1690	THE GEAR SHALL OPERATE ON A CONTINUOUS, 24 HOUR PER DAY BASIS.
1692	1692	THE GEAR SHALL OPERATE INTERMITTENTLY 1692 HOURS PER DAY.
		STATIC TORQUE.
1696	1696	THE GEAR SHALL BE CAPABLE OF SUSTAINING A STATIC TORQUE LOAD OF 1696 INCH-POUND(S).
1694	1694	THE GEAR SHALL BE CAPABLE OF SUSTAINING A STATIC LOAD OF 1694 FOOT-POUND(S).
1944	1944	THE GEAR SHALL BE CAPABLE OF SUSTAINING A STATIC LOAD OF 1944 NEWTON-METER.
		GEAR MANUFACTURING METHOD.
1730	1730	THE GEAR TEETH SHALL BE FORMED BY MILLING.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME

DESIGN AND CONSTRUCTION (CONT)

GEAR MANUFACTURING METHOD (CONT)

HOBBING.

SHAPING.

GRINDING.

MOLDING.

STAMPING.

FINISHED BY GRINDING.

FINISHED BY SHAVING.

FINISHED BY LAPING.

GEAR PRECISION OR QUALITY CLASS

NAS727 QUALITY CLASS _____

AGMA390.03 QUALITY CLASS _____

QUALITY CLASS ____

BACKLASH

BACKLASH DESIGNATION _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	CHAR CODE	STANDARD PARAGRAPH
1732	1732	THE GEAR TEETH SHALL BE FORMED BY HOBBING.
1734	1734	THE GEAR TEETH SHALL BE FORMED BY SHAPING.
1736	1736	THE GEAR TEETH SHALL BE FORMED BY GRINDING.
1738	1738	THE GEAR TEETH SHALL BE FORMED BY MOLDING.
1740	1740	THE GEAR TEETH SHALL BE FORMED BY STAMPING.
1742	1742	THE GEAR TEETH SHALL BE FINISHED BY GRINDING.
1744	1744	THE GEAR TEETH SHALL BE FINISHED BY SHAVING.
1746	1746	THE GEAR TEETH SHALL BE FINISHED BY LAPING.
		GEAR PRECISION OR QUALITY CLASS.
1780	1780	THE GEAR QUALITY CLASS SHALL BE 1780 IN ACCORDANCE WITH NAS727.
1784	1784	THE GEAR QUALITY CLASS SHALL BE 1784 IN ACCORDANCE WITH AGMA390.03.
1948	1948	THE GEAR QUALITY CLASS SHALL BE 1948.
		BACKLASH.
1790	1790	THE BACKLASH DESIGNATION SHALL BE 1790 IN ACCORDANCE WITH AGMA390.03.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME

DESIGN AND CONSTRUCTION (CONT)

BACKLASH (CONT)

NOMINAL (SELECT ONE)

U.S.

(MICROINCH)

SI

(MILLIMETER)

MAXIMUM (SELECT ONE)

U.S.

(INCH)

SI

(MILLIMETER)

MINIMUM (SELECT ONE)

U.S.

(INCH)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	CHAR CODE	STANDARD PARAGRAPH
1792	1792	THE BACKLASH ALLOWANCE SHALL BE 1792 MICROINCH(S) PER GEAR.
1950	1950	THE BACKLASH ALLOWANCE SHALL BE 1950 MILLIMETER(S) PER GEAR.
1794	1794	THE BACKLASH TOLERANCE SHALL BE NOT GREATER THAN 1794 INCH(S).
1952	1952	THE BACKLASH TOLERANCE SHALL BE NOT GREATER THAN 1952 MILLIMETER(S).
1796	1796	THE BACKLASH TOLERANCE SHALL BE NOT LESS THAN 1796 INCH(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME

DESIGN AND CONSTRUCTION (CONT)

MINIMUM (CONT)

SI

(MILLIMETER)

GEAR TOOTH FORMS AND GOVERNING STANDARDS
(SELECT ONE)

FULL DEPTH INVOLUTE PER ANSIB6.1
(GEAR NUMBER)

FULL DEPTH INVOLUTE PER AGMA201.02
(GEAR NUMBER)

STUB INVOLUTE PER ANSIB6.1, 20 DEGREES
(GEAR NUMBER)

COURSE PITCH INVOLUTE PER AGMA201.02, 20 DEGREES
(GEAR NUMBER)

COURSE PITCH INVOLUTE PER AGMA201.02, 25 DEGREES
(GEAR NUMBER)

FINE PITCH INVOLUTE PER ANSIB6.7
(GEAR NUMBER)

STRAIGHT BEVEL PER ANSIB6.13
(GEAR NUMBER)

SPIRAL BEVEL PER AGMA209.04
(GEAR NUMBER)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	CHAR CODE	STANDARD PARAGRAPH
1954	1954	THE BACKLASH TOLERANCE SHALL BE NOT LESS THAN 1954 MILLIMETER(S).
		GEAR TOOTH FORMS AND GOVERNING STANDARDS. THE GEAR TOOTH FORMS AND GOVERNING STANDARDS SHALL BE AS FOLLOWS:
4200	4200	GEAR NUMBER(S), 4200 SHALL BE FULL DEPTH INVOLUTE, 14.5 DEGREES, IN ACCORDANCE WITH ANSIB6.1.
4201	4201	GEAR NUMBER(S) 4201, SHALL BE FULL DEPTH INVOLUTE, 14.5 DEGREES, IN ACCORDANCE WITH AGMA201.02.
4202	4202	GEAR NUMBER(S) 4202, SHALL BE STUB INVOLUTE, 20 DEGREES, IN ACCORDANCE WITH ANSIB6.1.
4203	4203	GEAR NUMBER(S) 4203, SHALL BE COARSE PITCH INVOLUTE, 20 DEGREES, IN ACCORDANCE WITH AGMA201.02.
4204	4204	GEAR NUMBER(S) 4204, SHALL BE COARSE PITCH INVOLUTE, 25 DEGREES, IN ACCORDANCE WITH AGMA201.02.
4205	4205	GEAR NUMBER(S) 4205, SHALL BE FINE PITCH INVOLUTE, 20 DEGREES, IN ACCORDANCE WITH ANSIB6.7.
4206	4206	GEAR NUMBER(S) 4206, SHALL BE STRAIGHT BEVEL, IN ACCORDANCE WITH ANSIB6.13.
4207	4207	GEAR NUMBER(S) 4207, SHALL BE SPIRAL BEVEL, IN ACCORDANCE WITH AGMA209.04.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME

DESIGN AND CONSTRUCTION (CONT)

GEAR TOOTH FORMS AND GOVERNING STANDARDS (CONT)

FACE TYPE WITH SPUR PINION PER AGMA203.03
(GEAR NUMBER)

WORMGEAR PER ANSIB6.13
(GEAR NUMBER)

STUB INVOLUTE PER AGMA201.02
(GEAR NUMBER)

FINE PITCH INVOLUTE PER AGMA207.06
(GEAR NUMBER)

STRAIGHT BEVEL PER AGMA208.03
(GEAR NUMBER)

WORMGEAR PER AGMA374.04
(GEAR NUMBER)

GEAR CONFIGURATION _____

ABRASIVE RESISTANCE (GEARS ANODIZED AFTER FINAL MACHINING).

REQUIREMENTS (SELECT ONE)

PER BASE DOCUMENT EXCEPT _____

NO BASE ALUMINUM VISIBLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	CHAR CODE	STANDARD PARAGRAPH
4209	4209	GEAR NUMBER(S) 4209, FACE TYPE, 20 DEGREES INVOLUTE WITH SPUR PINION IN ACCORDANCE WITH AGMA203.03.
4210	4210	GEAR NUMBER(S) 4210, SHALL BE WORMGEAR, IN ACCORDANCE WITH ANSIB6.13.
4212	4212	GEAR NUMBER(S) 4212, SHALL BE STUB INVOLUTE, 20 DEGREES, IN ACCORDANCE WITH AGMA201.02.
4214	4214	GEAR NUMBER(S) 4214, SHALL BE FINE PITCH INVOLUTE, 20 DEGREES, IN ACCORDANCE WITH AGMA207.06.
4216	4216	GEAR NUMBER(S) 4216, SHALL BE STRAIGHT BEVEL, IN ACCORDANCE WITH AGMA208.03.
4218	4218	GEAR NUMBER(S) 4218, SHALL BE WORMGEAR, IN ACCORDANCE WITH AGMA374.04.
1960	1960	THE GEAR(S) CONFIGURATION SHALL BE 1960.
1868	1868	ABRASIVE RESISTANCE (GEARS ANODIZED AFTER FINAL MACHINING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1868.
1870	1870	ABRASIVE RESISTANCE (GEARS ANODIZED AFTER FINAL MACHINING). THERE SHALL BE NO VISIBLE BASE ALUMINUM METAL WHEN THE ANODIC COATING AS VIEWED UNDER A 25 POWER MICROSCOPE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME

ABRASIVE RESISTANCE (CONT)

TEST METHODS (SELECT ONE)

PER BASE DOCUMENT EXCEPT _____

TABOR ABRASOR DEVICE.

CHEMICAL COMPOSITION

REQUIREMENTS (SELECT ONE)

PER BASE DOCUMENT EXCEPT _____

CERTIFICATE OF COMPOSITION.

TEST METHODS (SELECT ONE)

PER BASE DOCUMENT EXCEPT _____

PER FED-STD-151, METHOD 111.2.

PER FED-STD-151, METHOD 112.2.

SUPPLIERS CERTIFICATION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	CHAR CODE	STANDARD PARAGRAPH
1862	1862	ABRASIVE RESISTANT (GEARS ANODIZED AFTER FIANL MACHINING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1862.
1864	1864	ABRASIVE RESISTANCE (GEARS ANODIZED AFTER FINAL MACHINING). THE TEST SPECIMEN SHALL BE CAPABLE OF RESISTING 1000 CYCLES OF A LOAD OF 250 GRAMS ON A NO. CS-10 CALIBRASE WHEEL WITHOUT DESTRUCTION OF THE ANODIC COATING. A TABOR ABRASOR IS CONSIDERED A SUITABLE DEVICE FOR PERFORMING THIS TEST.
1962	1962	CHEMICAL COMPOSITION. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1962.
1964	1964	CHEMICAL COMPOSITION. SUPPLIER SHALL FURNISH A CERTIFICATE OF COMPOSITION.
1712	1712	CHEMICAL COMPOSITION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1712.
1714	1714	CHEMICAL COMPOSITION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 111.2 OF FED-STD-151.
1716	1716	CHEMICAL COMPOSITION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 112.2 OF FED-STD-151.
1718	1718	CHEMICAL COMPOSITION. SUPPLIER'S CERTIFICATION MAY BE ACCEPTED IN LIEU OF CHEMICAL ANALYSIS TO VERIFY CONFORMANCE WITH MATERIAL SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME

EMBRITTLEMENT RELIEF

REQUIREMENTS (SELECT ONE)

PER BASE DOCUMENT EXCEPT _____

NO EMBRITTLEMENT.

PER GG-P-416, TREATMENT.

TEST METHODS (SELECT ONE)

PER BASE DOCUMENT EXCEPT _____

PER QQ-P-416.

FUNGUS

REQUIREMENTS (SELECT ONE)

PER BASE DOCUMENT EXCEPT _____

FUNGUS RESISTANT BY CERTIFICATION OR BY TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	CHAR CODE	STANDARD PARAGRAPH
1908	1908	EMBRITTLEMENT RELIEF. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1908.
1910	1910	EMBRITTLEMENT RELIEF. THE TEST SPECIMEN SHALL EXHIBIT NO EMBRITTLEMENT FROM THE PLATING PROCESS.
1912	1912	EMBRITTLEMENT RELIEF. THE GEAR SHALL BE SUBJECTED TO THE HYDROGEN EMBRITTLEMENT RELIEF TREATMENT OF GG-P-416.
1902	1902	EMBRITTLEMENT RELIEF. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1902.
1904	1904	EMBRITTLEMENT RELIEF. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH QQ-P-416.
4760	4760	FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.
4761	4761	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED, THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME

FUNGUS (CONT)

TEST METHODS (SELECT ONE)

PER BASE DOCUMENT EXCEPT _____

PER MIL-STD-810, METHOD 508.

HUMIDITY

REQUIREMENTS (SELECT ONE)

PER BASE DOCUMENT EXCEPT _____

NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.

NO DEGRADATION OF PERFORMANCE.

REMAIN WITHIN SPECIFIED TOLERANCE.

TEST METHODS (SELECT ONE)

PER BASE DOCUMENT EXCEPT _____

PER MIL-STD-810, METHOD 507.

*PROCEDURE NUMBER (SELECT ONE)

TEST PROCEDURE I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	CHAR CODE	STANDARD PARAGRAPH
4754	4754	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.
4755	4755	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.
4798	4798	HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.
4799	4799	HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OF PHYSICAL DAMAGE.
4815	4815	THERE SHALL BE NO DEGRADATION OF PERFORMANCE.
4791	4791	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4788	4788	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.
4871	4871	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 507 OF MIL-STD-810.
4767	4767	PROCEDURE NUMBER I SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME

HUMIDITY (CONT)

TEST PROCEDURE I. (CONT)

EXTREME TEMPERATURE BEFORE TESTING (DEGREES CELSIUS)

*DURATION OF TEMPERATURE EXPOSURE (HOURS)

TEST PROCEDURE II.

CYCLE LIMITED TO 24 HOURS DURATION.

TEST PROCEDURE III.

TEST PROCEDURE IV.

TEST PROCEDURE V.

NUMBER OF CYCLES (NUMBER)

MAGNETIC PERMEABILITY

REQUIREMENTS (SELECT ONE)

PER BASE DOCUMENT EXCEPT _____

PER MIL-I-17214.

FIELD DENSITY (TESLA)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	CHAR CODE	STANDARD PARAGRAPH
4777	4777	SPECIMEN(S) SHALL BE EXPOSED TO 4777 DEGREES CELSIUS BEFORE TESTING.
4778	4778	DURATION OF EXPOSURE TO EXTREME TEMPERATURE SHALL BE 4778 HOUR(S).
6334	6334	PROCEDURE NUMBER II SHALL APPLY.
4716	4716	CYCLES SHALL BE LIMITED TO 24 HOURS DURATION.
6335	6335	PROCEDURE NUMBER III SHALL APPLY.
6336	6336	PROCEDURE NUMBER IV SHALL APPLY.
6337	6337	PROCEDURE NUMBER V SHALL APPLY.
4800	4800	THERE SHALL BE 4800 CYCLE(S).
1966	1966	MAGNETIC PERMEABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1966.
1968	1968	MAGNETIC PERMEABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH MIL-I-17214.
1970	1970	THE FIELD DENSITY OF THE GEAR SHALL BE NOT GREATER THAN 1970 TESLA.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME

MAGNETIC PERMEABILITY (CONT)

PER MIL-I-17214 (CONT)

FIELD STRENGTH (WEBER)

MAGNETIC PERMEABILITY _____

TEST METHODS (SELECT ONE)

PER BASE DOCUMENT EXCEPT _____

PER MIL-I-17214.

RADIOGRAPHIC

REQUIREMENTS (SELECT ONE)

PER BASE DOCUMENT EXCEPT _____

NO INHOMOGENEITIES, FOREIGN PARTICLES, INCORRECT ALIGNMENT, DEFECTS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	CHAR CODE	STANDARD PARAGRAPH
1972	1972	THE FIELD STRENGTH OF THE GEAR SHALL BE NOT GREATER THAN 1972 WEBER.
1974	1974	THE MAGNETIC PERMEABILITY OF THE GEAR SHALL BE 1974.
2014	2014	MAGNETIC PERMEABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2014.
2016	2016	MAGNETIC PERMEABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-I-17214.
6291	6291	RADIOGRAPHIC. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6291.
6371	6371	RADIOGRAPHIC. THE EXAMINATION OF THE RADIOGRAPHS OF THE ITEMS SHALL SHOW: NO INHOMOGENEITIES, NO FOREIGN PARTICLES WITHIN THE ENCLOSURE, ALL PARTS CORRECTLY ALIGNED WITH EACH OTHER, NO DEFECTIVE WORKMANSHIP DETAILS, OR ANY OTHER DEFECTS SPECIFIED HEREIN. MANUFACTURERS SHALL PROVIDE A MEANS OF IDENTIFYING ITEMS ON THE NEGATIVES (OR NONFILM RECORDS, IF APPLICABLE).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME

RADIOGRAPHIC (CONT)

NO INHOMOGENEITIES, FOREIGN PARTICLES, INCORRECT ALIGNMENT, DEFECTS. (CONT)

*DISPOSITION OF NEGATIVES OR RECORDS (SELECT ONE)

DELIVERED.

NOT DELIVERED.

TEST METHODS (SELECT ONE)

PER BASE DOCUMENT EXCEPT _____

PER MIL-STD-202, METHOD 209.

SOURCE-OBJECT DISTANCE (SELECT ONE)

(METERS)

(INCHES)

VIEWING EQUIPMENT (IDENTIFY) _____

MAGNIFICATION (X-POWER)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	CHAR CODE	STANDARD PARAGRAPH
4857	4857	NEGATIVES (OR NONFILM RECORDS, IF APPLICABLE) SHALL BE DELIVERED WITH EACH SHIPMENT OF ITEMS.
4858	4858	NEGATIVES (OR NONFILM RECORDS, IF APPLICABLE) SHALL BE MADE AVAILABLE FOR EXAMINATION UPON REQUEST.
6282	6282	RADIOGRAPHIC. RADIOGRAPHIC INSPECTION SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6282.
4843	4843	RADIOGRAPHIC. RADIOGRAPHIC INSPECTION SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 209 OF MIL-STD-202.
6286	6286	THE SOURCE-OBJECT DISTANCE (THE DISTANCE FROM THE FOCAL SPOT OF THE X-RAY TUBE TO THE OBJECT BEING RADIOGRAPHED) SHALL BE 6286 METER(S).
6285	6285	THE SOURCE-OBJECT DISTANCE (THE DISTANCE FROM THE FOCAL SPOT OF THE X-RAY TUBE TO THE OBJECT BEING RADIOGRAPHED) SHALL BE 6285 INCH(S).
6287	6287	THE VIEWING EQUIPMENT SHALL BE 6287.
6288	6288	THE IMAGES SHALL BE VIEWED AT 6288 X-POWER MAGNIFICATION.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME

RADIOGRAPHIC (CONT)

PER MIL-STD-202, METHOD 209. (CONT)

DEFECTS SOUGHT (IDENTIFY) _____

NONFILM TECHNIQUES ALLOWED.

PENETRAMETER WIRE SIZE (SELECT ONE)

(AWG)

(MILLIMETERS)

RADIUS MEASUREMENT

REQUIREMENTS (SELECT ONE)

PER BASE DOCUMENT EXCEPT _____

PER AGMA390.03.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	CHAR CODE	STANDARD PARAGRAPH
6289	6289	THE DEFECTS TO BE SOUGHT SHALL BE 6289.
6284	6284	NONFILM TECHNIQUES MAY BE USED, IF DESIRED. RECORDS SHALL BE MAINTAINED, FOR EXAMINATION OR DELIVERY, AS SPECIFIED.
6283	6283	TO FURTHER INSURE ADEQUATE QUALITY, A RADIOGRAPH OF THE PENETRAMETER SHALL BE INCLUDED ON EACH RADIOGRAPHIC FILM. THE PENETRAMETER SHALL BE MADE FROM A SAMPLE ITEM OF THE SAME TYPE AS THE ITEM BEING INSPECTED (RADIOGRAPHED). THE PENETRAMETER SHOULD UTILIZE AN AWG SIZE 6283 COPPER WIRE ON THE SIDE OF THE ITEM FARTHEST FROM THE X-RAY FILM.
5297	5297	TO FURTHER INSURE ADEQUATE QUALITY, A RADIOGRAPH OF THE PENETRAMETER SHALL BE INCLUDED ON EACH RADIOGRAPHIC FILM. THE PENETRAMETER SHALL BE MADE FROM A SAMPLE ITEM OF THE SAME TYPE AS THE ITEM BEING INSPECTED (RADIOGRAPHED). THE PENETRAMETER SHOULD UTILIZE A 5297 MILLIMETER(S) DIAMETER COPPER WIRE ON THE SIDE OF THE ITEM FARTHEST FROM THE X-RAY FILM.
1976	1976	RADIUS MEASUREMENT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1976.
1978	1978	RADIUS MEASUREMENNT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH AGMA390.03.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME

RADIUS MEASUREMENT (CONT)

PER AGMA390.03. (CONT)

MAXIMUM (SELECT ONE)

U.S.

(INCH)

SI

(MILLIMETER)

MINIMUM (SELECT ONE)

U.S.

(INCH)

SI

(MILLIMETER)

RADIUS MEASUREMENT (TIR)

TEST METHODS (SELECT ONE)

PER BASE DOCUMENT EXCEPT _____

PER AGMA390.03.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	CHAR CODE	STANDARD PARAGRAPH
1774	1774	THE RADIUS MEASUREMENT SHALL BE NOT GREATER THAN 1774 INCH(S).
1980	1980	THE RADIUS MEASUREMENT SHALL BE NOT GREATER THAN 1980 MILLIMETER(S).
1776	1776	THE RADIUS MEASUREMENT SHALL BE NOT LESS THAN 1776 INCH(S).
1982	1982	THE RADIUS MEASUREMENT SHALL BE NOT LESS THAN 1982 MILLIMETER(S).
1984	1984	THE RADIUS MEASUREMENT SHALL BE 1984 TIR.
2018	2018	RADIUS MEASUREMENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2018.
1770	1770	RADIUS MEASUREMENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH AGMA390.03.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME

SALT SPRAY/FOG

REQUIREMENTS (SELECT ONE)

PER BASE DOCUMENT EXCEPT _____

NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE.

TEST METHODS (SELECT ONE)

PER BASE DOCUMENT EXCEPT _____

PER ASTMB117.

EXPOSURE PERIOD (HOURS)

STRESS CORROSION

REQUIREMENTS (SELECT ONE)

PER BASE DOCUMENT EXCEPT _____

NO PHYSICAL DAMAGE OR CORROSION.

TEST METHODS (SELECT ONE)

PER BASE DOCUMENT EXCEPT _____

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	CHAR CODE	STANDARD PARAGRAPH
6356	6356	SALT SPRAY/FOG. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6356.
6357	6357	SALT SPRAY/FOG. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
6353	6353	SALT SPRAY/FOG. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6353.
6354	6354	SALT SPRAY/FOG. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMB117.
4783	4783	DURATION OF TEST SHALL BE 4783 HOUR(S).
1892	1892	STRESS CORROSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1892.
1894	1894	STRESS CORROSION. THE TEST SPECIMEN SHALL SHOW NO EVIDENCE OF PHYSICAL DAMAGE OR CORROSION.
1882	1882	STRESS CORROSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1882.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME

STRESS CORROSION (CONT)

TEST METHODS (CONT)

PER FED-STD-151, METHOD 823.

NOMINAL TEST LOAD _____

MAXIMUM TEST LOAD (SELECT ONE)

U.S.

(POUND)

SI

(KILLOGRAM)

MAXIMUM TEST DURATION (SELECT ONE)

(HOURS)

(MINUTES)

MINIMUM TEST DURATION (SELECT ONE)

(HOURS)

(MINUTES)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	CHAR CODE	STANDARD PARAGRAPH
1884	1884	STRESS CORROSION. TESTING SHALL BE PERFORMED IN METHOD 823 OF FED-STD-151.
2036	2036	THE TEST LOAD SHALL BE 2036.
1887	1887	THE TEST LOAD SHALL BE NOT GREATER THAN 1887 POUND(S).
2022	2022	THE TEST LOAD SHALL BE NOT LESS THAN 2022 KILOGRAM(S).
1888	1888	THE TEST DURATION SHALL BE NOT GREATER THAN 1888 HOUR(S).
2024	2024	THE TEST DURATION SHALL BE NOT GREATER THAN 2024 MINUTE(S).
2026	2026	THE TEST DURATION SHALL BE NOT LESS THAN 2026 HOUR(S).
2028	2028	THE TEST DURATION SHALL BE NOT LESS THAN 2028 MINUTE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME

SURFACE ROUGHNESS

REQUIREMENTS (SELECT ONE)

PER BASE DOCUMENT EXCEPT _____

REQUIREMENTS AS FOLLOWS:

MAXIMUM TOOTH SURFACE (SELECT ONE

U.S.

(MICROINCH)

SI

(MILLIMETER)

MAXIMUM GEAR BORE SURFACE (SELECT

U.S.

(MICROINCH)

SI

(MILLIMETER)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	CHAR CODE	STANDARD PARAGRAPH
1848	1848	SURFACE ROUGHNESS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUEMENT, EXCEPT 1848.
1986	1986	SURFACE ROUGHNESS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1852	1852	THE SURFACE ROUGHNESS ON THE TOOTH WORKING SURFACE SHALL BE NOT GREATER THAN 1852 MICROINCH(S).
1990	1990	THE SURFACE ROUGHNESS ON THE TOOTH WORKING SURFACE SHAALL BE NOT GREATER THAN 1990 MILLIMETER(S).
1854	1854	THE SURFACE ROUGHNESS ON THE GEAR BORE SHALL BE NOT GREATER THAN 1854 MICROINCH(S).
1992	1992	THE SURFACE ROUGHNESS ON THE GEAR BORE SHALL BE NOT GREATER THAN 1992 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME

SURFACE ROUGHNESS (CONT)

TEST METHODS (SELECT ONE)

PER BASE DOCUMENT EXCEPT _____

ELECTRONIC STYLUS METHOD.

TOTAL COMPOSITE ERROR

REQUIREMENTS (SELECT ONE)

PER BASE DOCUMENT EXCEPT _____

PER AGMA390.03.

TOTAL COMPOSITE ERROR (SELECT ONE)

U.S.

(INCH)

SI

(MILLIMETER)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	CHAR CODE	STANDARD PARAGRAPH
1842	1842	SURFACE ROUGHNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1842.
1844	1844	SURFACE ROUGHNESS. THE SURFACE ROUGHNESS SHALL BE DETERMINED BY THE ELECTRONIC STYLUS METHOD WHERE PRACTICAL. WHERE THIS METHOD IS NOT PRACTICAL, SURFACE ROUGHNESS MAY BE INSPECTED AND EVALUATED OPTICALLY UNDER A 25 POWER MAGNIFICATION BY COMPARISON OF THE TEST SURFACE WITH A STANDARD SURFACE FINISH OF KNOWN ROUGHNESS PRODUCED ON THE SAME MATERIAL AND GENERAL CONFIGURATION.
1994	1994	TOTAL COMPOSITE ERROR. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1994.
1996	1996	TOTAL COMPOSITE ERROR. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH AGMA390.03.
1998	1998	THE TOTAL COMPOSITE ERROR SHALL BE 1998 INCH(S).
2000	2000	THE TOTAL COMPOSITE ERROR SHALL BE 2000 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME

TOTAL COMPOSITE ERROR (CONT)

MAXIMUM COMPOSITE ERROR (SELECT ONE)

U.S.

(INCH)

SI

(MILLIMETER)

MINIMUM COMPOSITE ERROR (SELECT ONE)

U.S.

(INCH)

SI

(MILLIMETER)

TEST METHODS (SELECT ONE)

PER BASE DOCUMENT EXCEPT _____

PER AGMA390.03.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	CHAR CODE	STANDARD PARAGRAPH
2002	2002	THE TOTAL COMPOSITE ERROR SHALL BE NOT GREATER THAN 2002 INCH(S).
2004	2004	THE TOTAL COMPOSITE ERROR SHALL BE NOT GREATER THAN 2004 MILLIMETER(S).
2006	2006	THE TOTAL COMPOSITE ERROR SHALL BE NOT LESS THAN 2006 INCH(S).
2008	2008	THE TOTAL COMPOSITE ERROR SHALL BE NOT LESS THAN 2008 MILLIMETER(S).
2030	2030	TOTAL COMPOSITE ERROR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2030.
2032	2032	TOTAL COMPOSITE ERROR. TSTING SHALL BE PERFORMED IN ACCORDANCE WITH AGMA390.03.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME

VIBRATION, RANDOM

REQUIREMENTS (SELECT ONE)

PER BASE DOCUMENT EXCEPT _____

NO EVIDENCE OF PHYSICAL DAMAGE.

TEST METHODS (SELECT ONE)

PER BASE DOCUMENT EXCEPT _____

PER MIL-STD-202, METHOD 214.

WEIGHT

MINIMUM WEIGHT/MASS PER UNIT (SELECT ONE)

U.S. (SELECT ONE)

(OUNCES)

(POUNDS)

SI (SELECT ONE)

(GRAMS)

(KILOGRAMS)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	CHAR CODE	STANDARD PARAGRAPH
1435	1435	VIBRATION, RANDOM. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1435.
1436	1436	VIBRATION, RANDOM. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1426	1426	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1426.
1427	1427	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 214 OF MIL-STD-202.
6943	6943	MINIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT LESS THAN 6943 OUNCE(S).
6944	6944	MINIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT LESS THAN6944 POUND(S).
6945	6945	MINIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT LESS THAN 6945 GRAM(S).
6946	6946	MINIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT LESS THAN 6946 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME

WEIGHT/MASS

MAXIMUM WEIGHT/MASS PER UNIT (SELECT ONE)

U.S. (SELECT ONE)

(OUNCES)

(POUNDS)

SI (SELECT ONE)

(GRAMS)

(KILOGRAMS)

NOMINAL WEIGHT/MASS PER UNIT (SELECT ONE)

U.S. (SELECT ONE)

(OUNCES)

(POUNDS)

SI (SELECT ONE)

(GRAMS)

(KILOGRAMS)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	CHAR CODE	STANDARD PARAGRAPH
7022	7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7023	7023	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).
7021	7021	MAXIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	7024	MAXIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).
6996	6996	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6996 OUNCE(S).
6997	6997	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6997 POUND(S).
6998	6998	NOMINAL MASS PER UNIT. THE MASS PER UNIT SHALL BE 6998 GRAM(S).
6999	6999	NOMINAL MASS PER UNIT. THE MASS PER UNIT SHALL BE 6999 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME

MOUNTING HARDWARE (SEE TABLE VIII, DOD-STD-35)

NOTE: AUTOMATIC WHEN TABLE VIII IS USED.

WORKMANSHIP

(DOC DES)

ADDITIONAL REQUIREMENTS

A _____

B _____

C _____

D _____

E _____

PART MARKING (SELECT ONE)

(DOC DES)

MIL-STD-1285.

MIL-STD-130.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	CHAR CODE	STANDARD PARAGRAPH
		MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
		ADDITIONAL REQUIREMENTS..
7001	7001	(A) 7001.
7002	7002	(B) 7002.
7003	7003	(C) 7003.
7004	7004	(D) 7004.
7005	7005	(E) 7005.
6372	6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME

ADDITIONAL PART MARKING

A _____

B _____

C _____

D _____

E _____

APPLICABLE DOCUMENTS (SEE DOD-STD-35)

QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)

PACKAGING (SEE DOD-STD-35)

NOTES (SEE DOD-STD-35)

NOMENCLATURE (SEE DOD-STD-35)

SUPERSEDED DOCUMENT (SEE DOD-STD-35)

PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	CHAR CODE	STANDARD PARAGRAPH
		ADDITIONAL PART MARKING.
6991	6991	(A) 6991.
6992	6992	(B) 6992.
6993	6993	(C) 6993.
6994	6994	(D) 6994.
6995	6995	(E) 6995.

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI

(Project EDS-346)


Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX A


ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

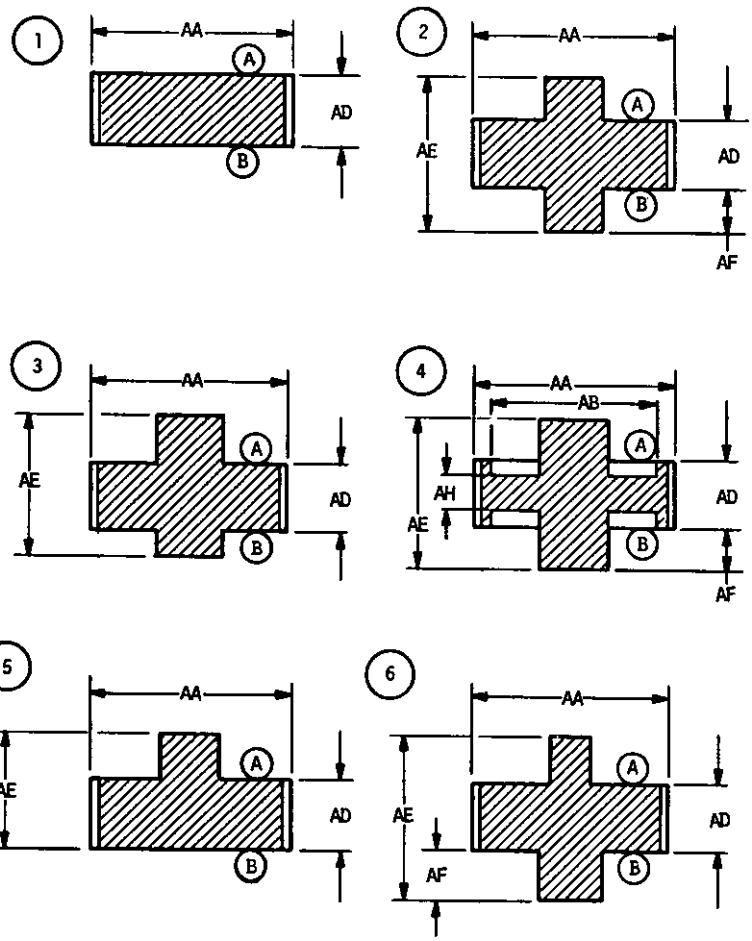


113-01-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

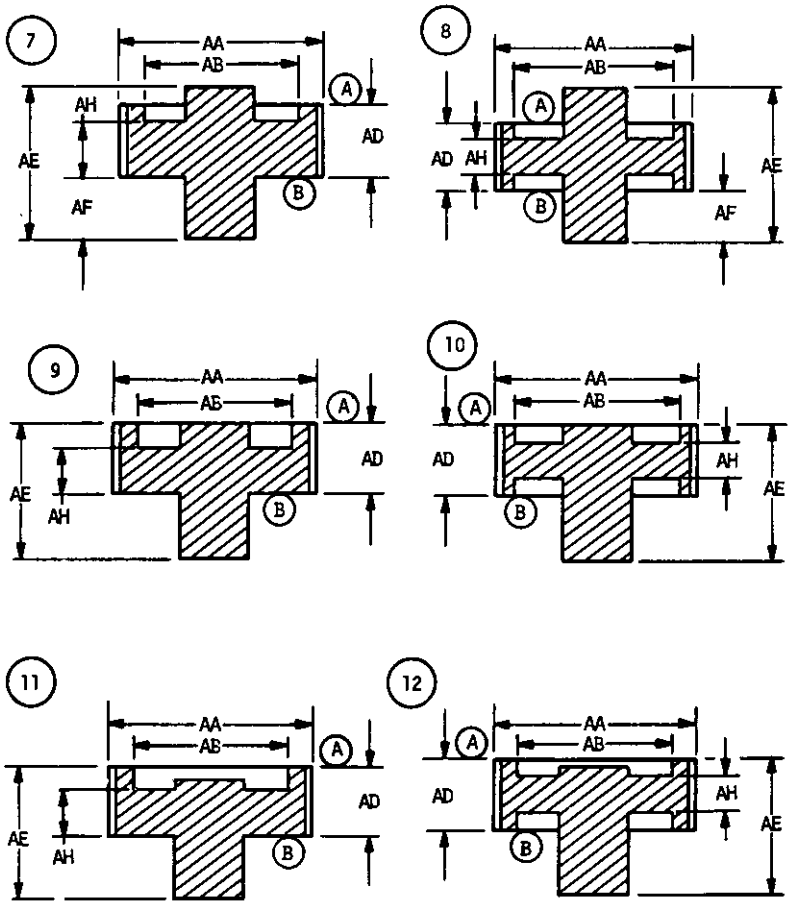


113-01-2

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

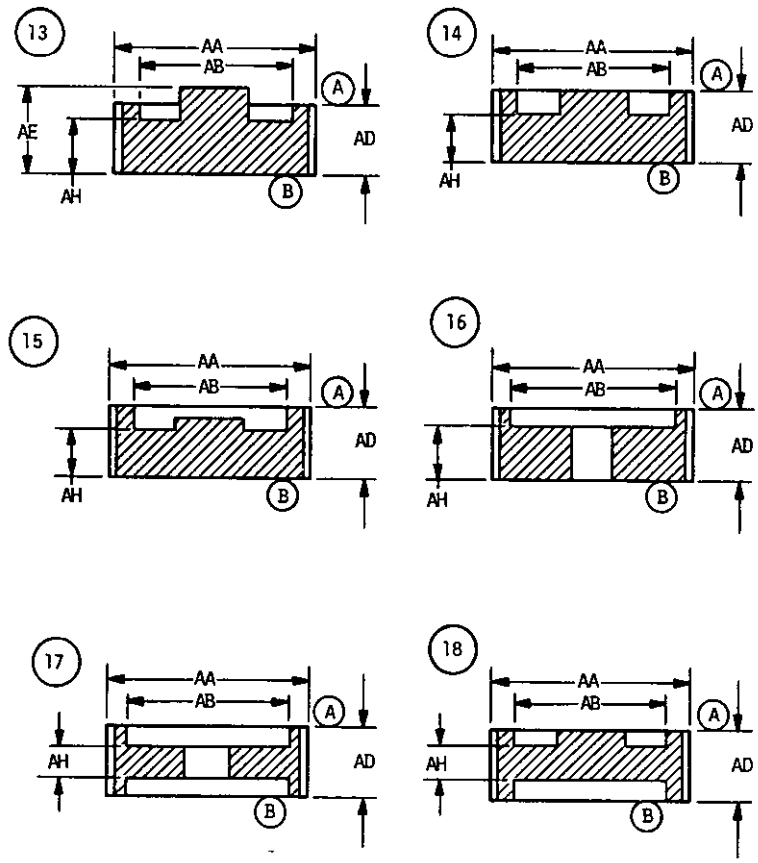


113-01-3

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

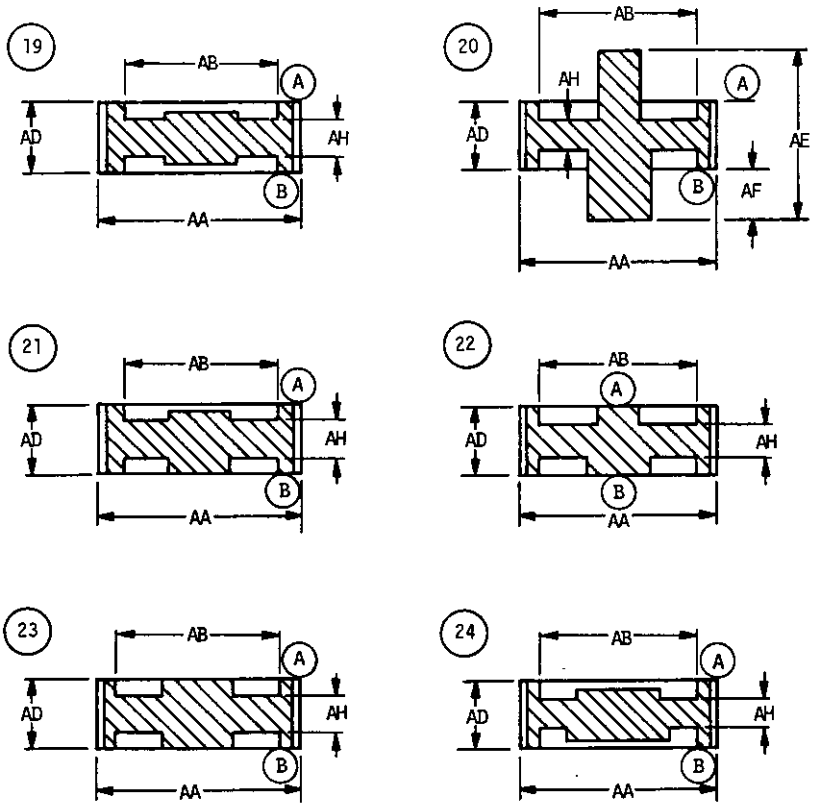


113-01-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

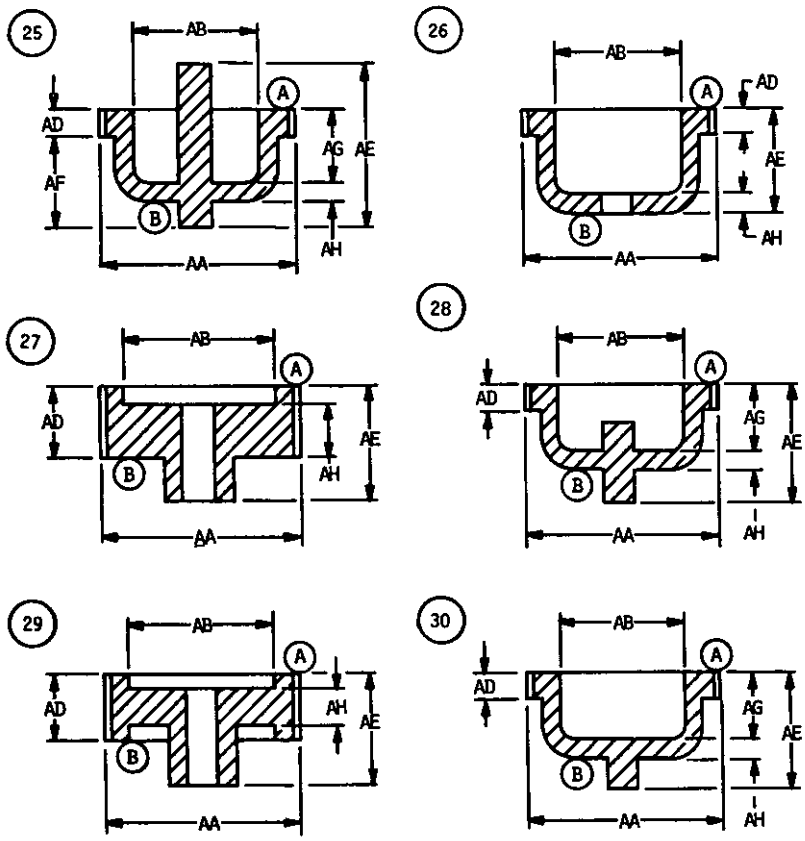


113-01-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

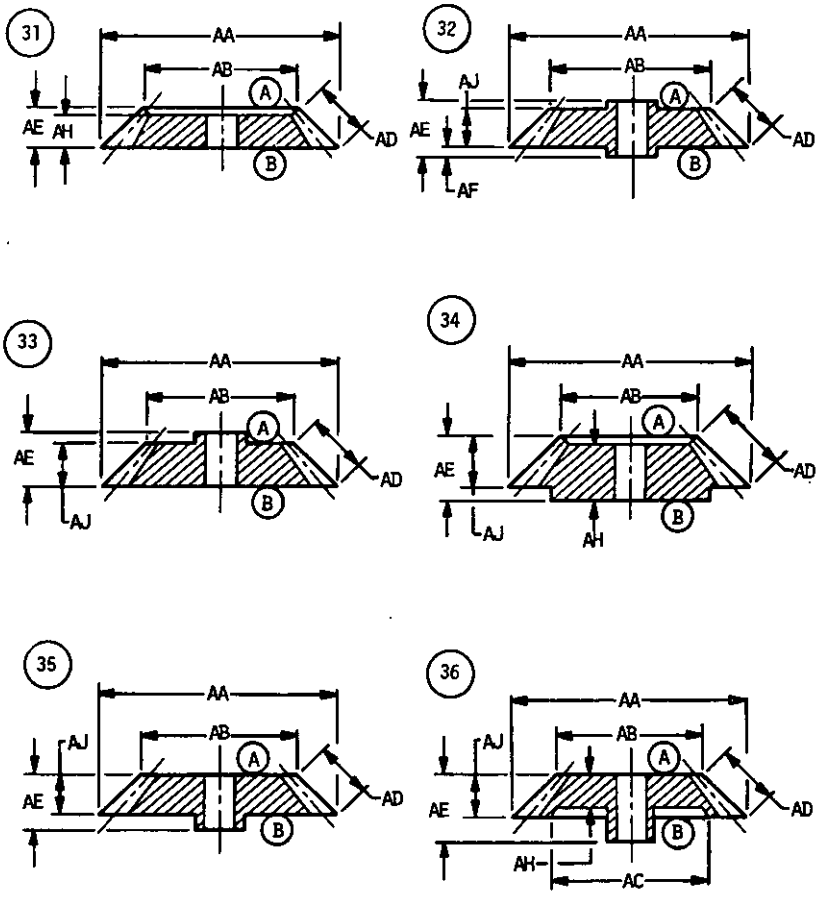


113-01-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

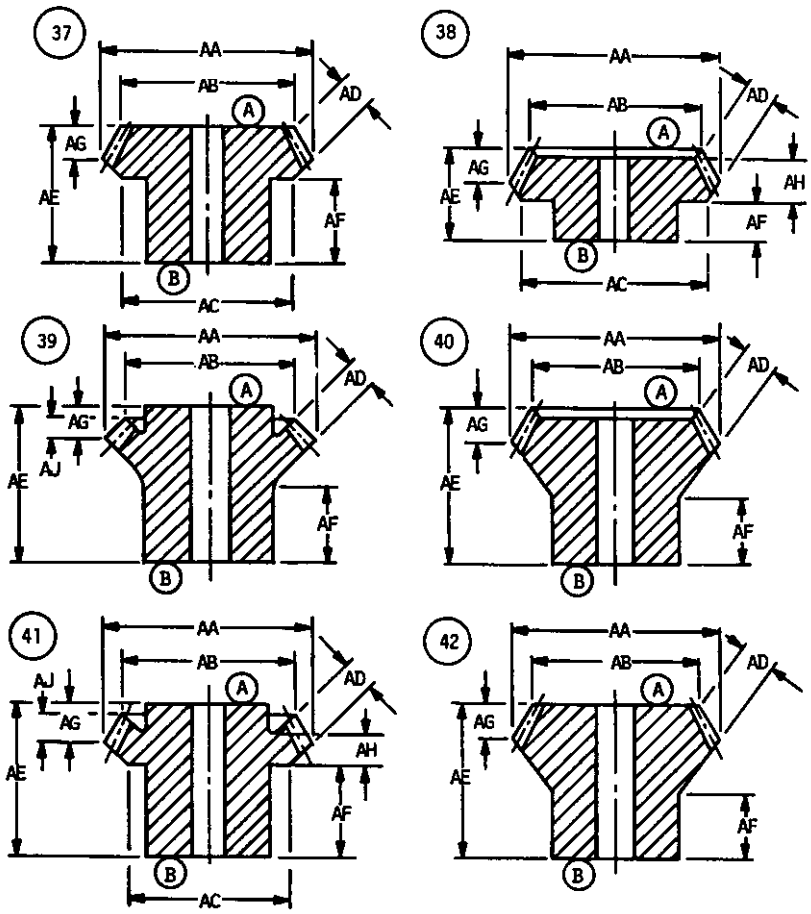


113-01-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

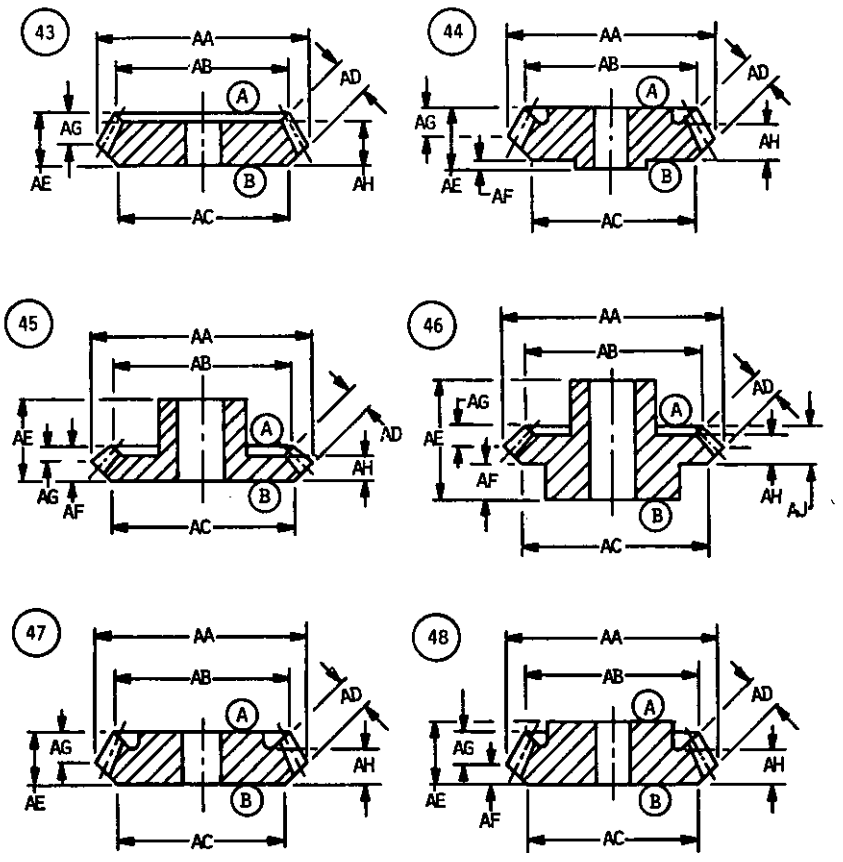


113-01-8

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

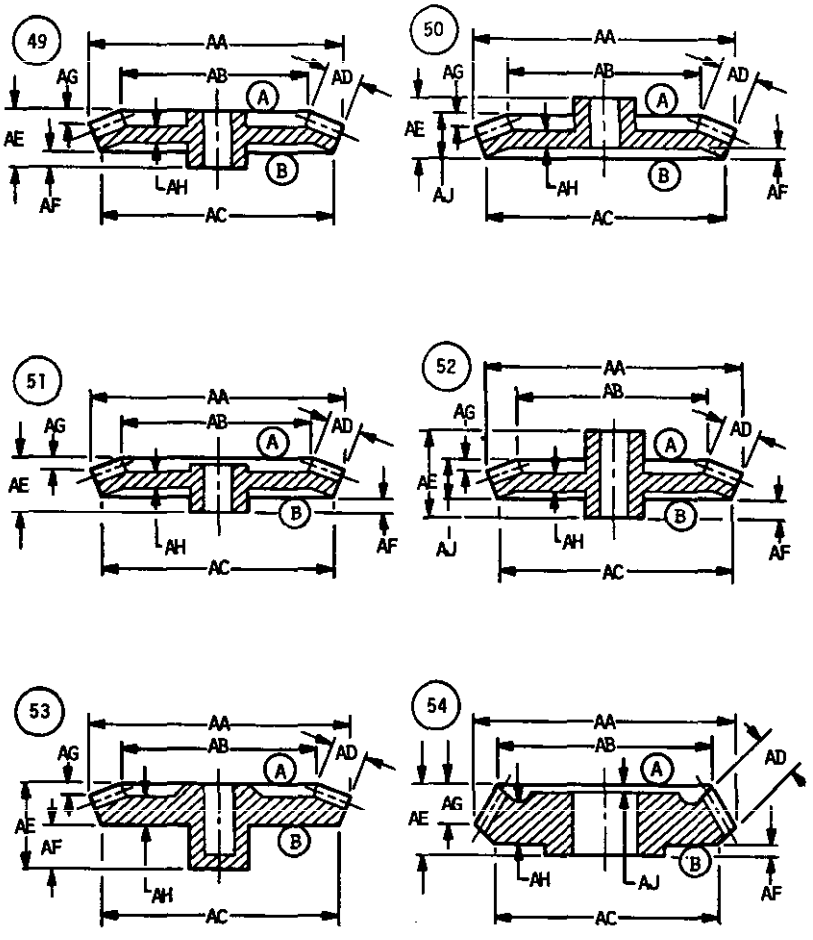


113-01-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

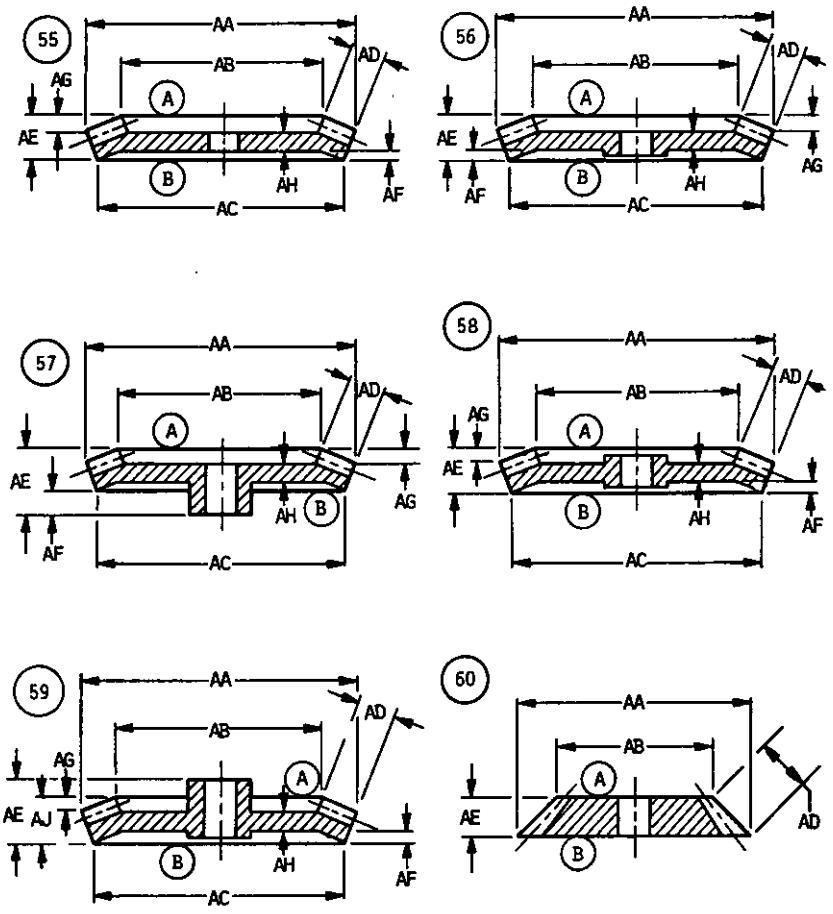


113-01-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

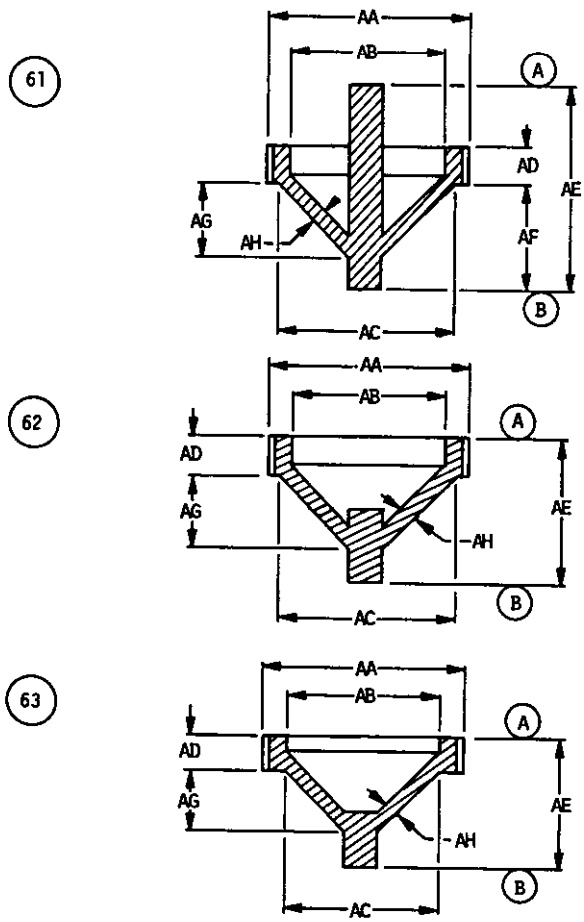


113-01-11

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

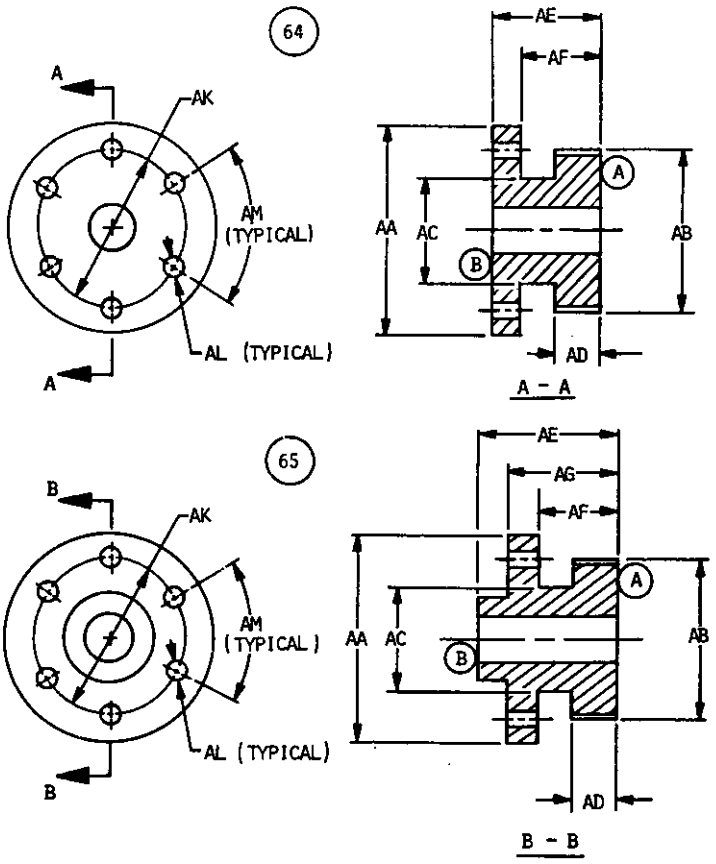


113-01-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

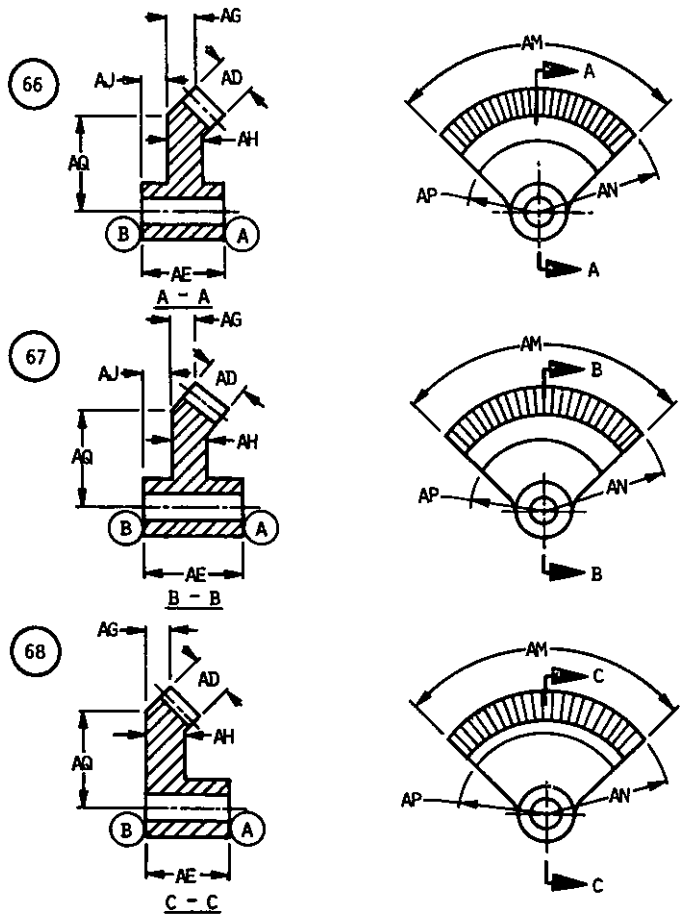


113-01-13

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

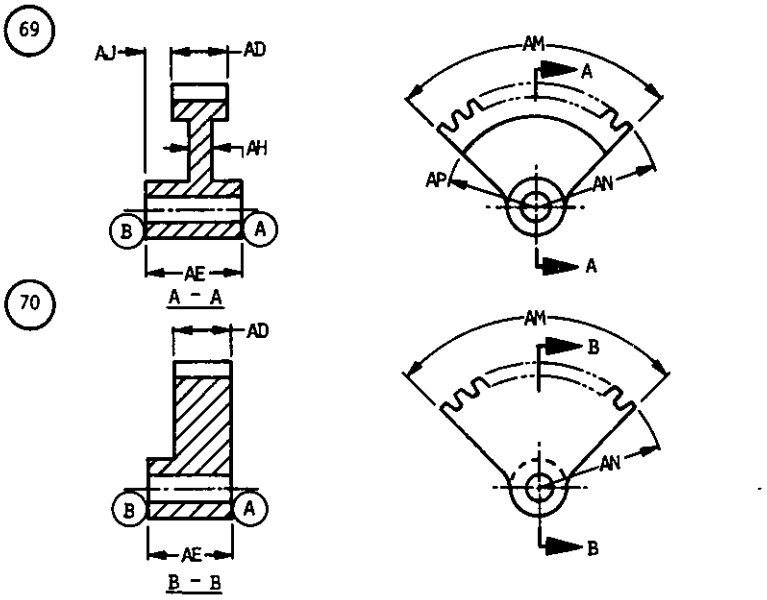


113-01-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

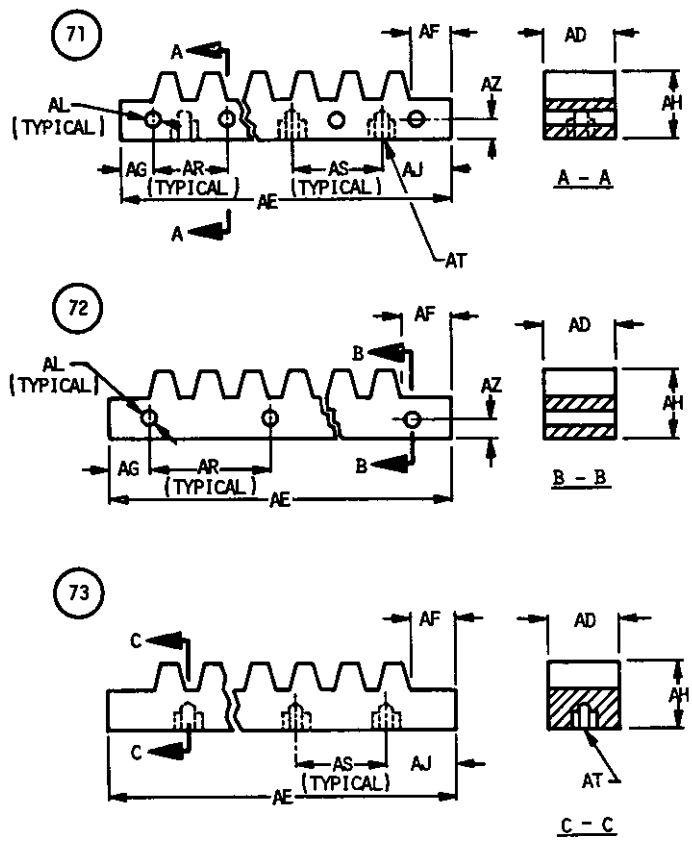


113-01-15

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

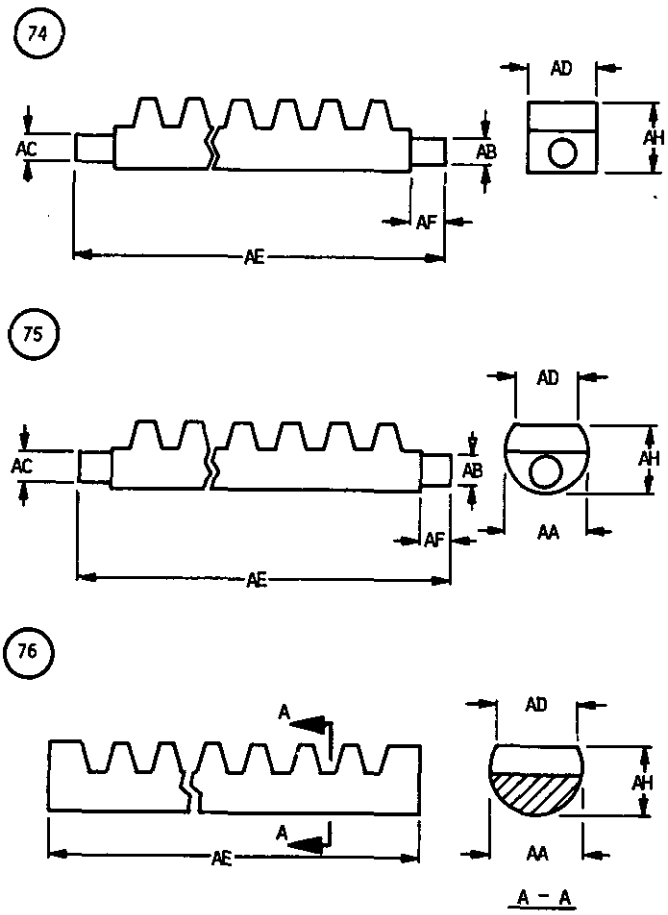

113-01-16


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

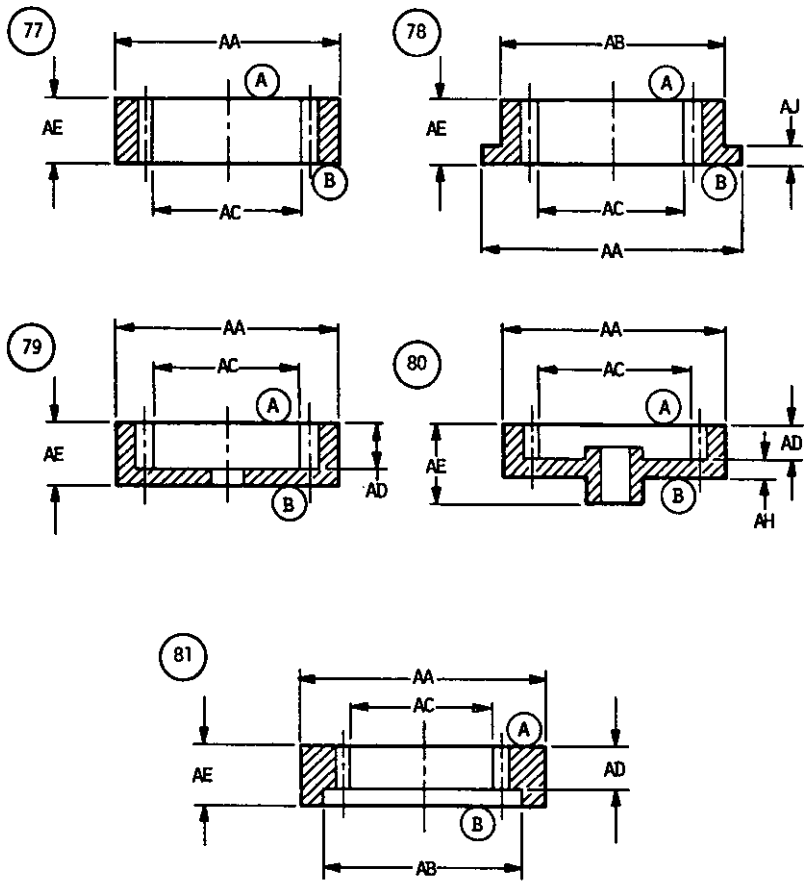


113-01-17

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.


82

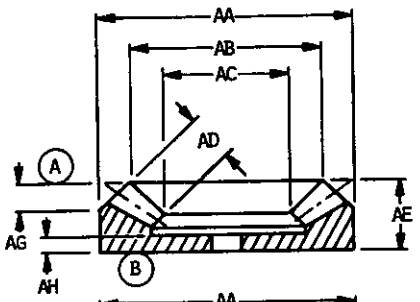

83

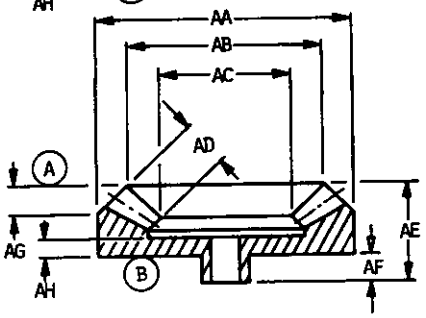


84

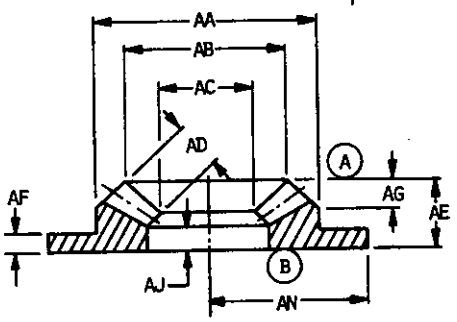


113-01-18

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

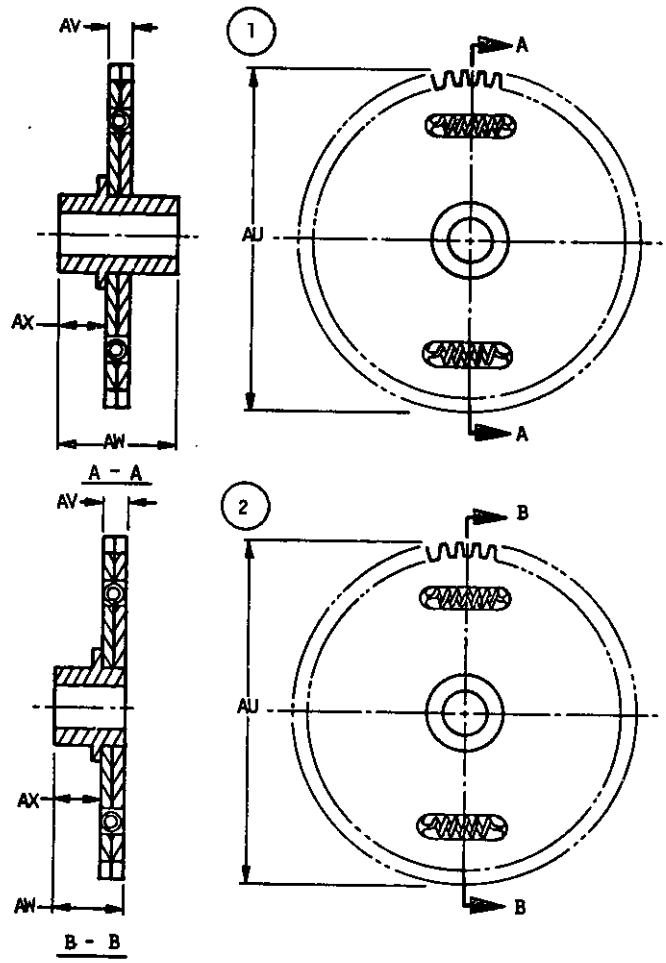


113-02-1

Source: https://assist.dla.mil/ Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

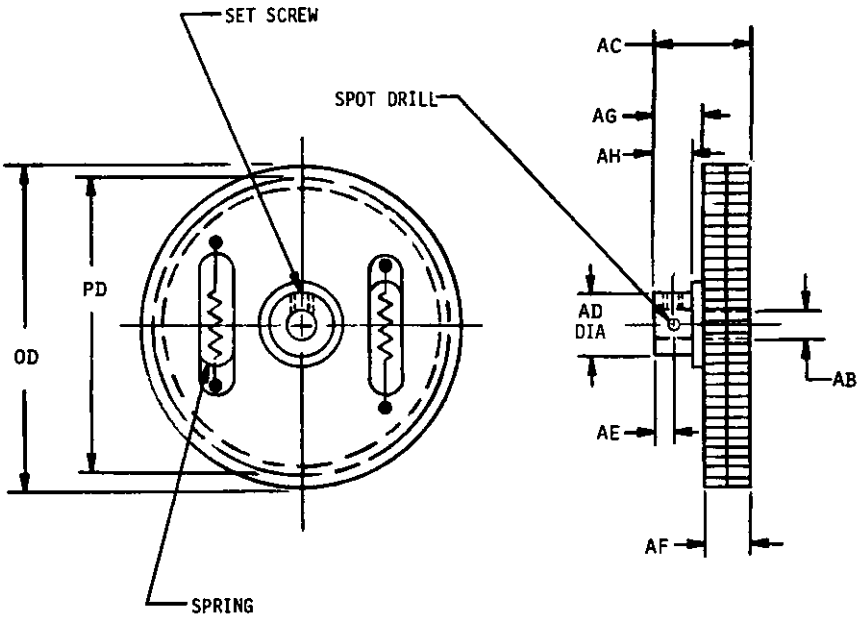


113-02-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

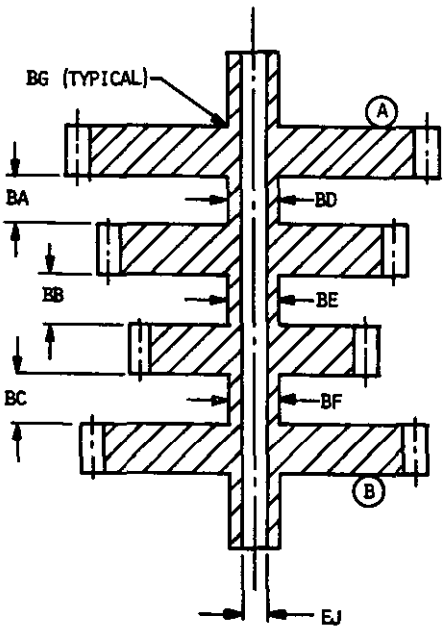


113-03-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

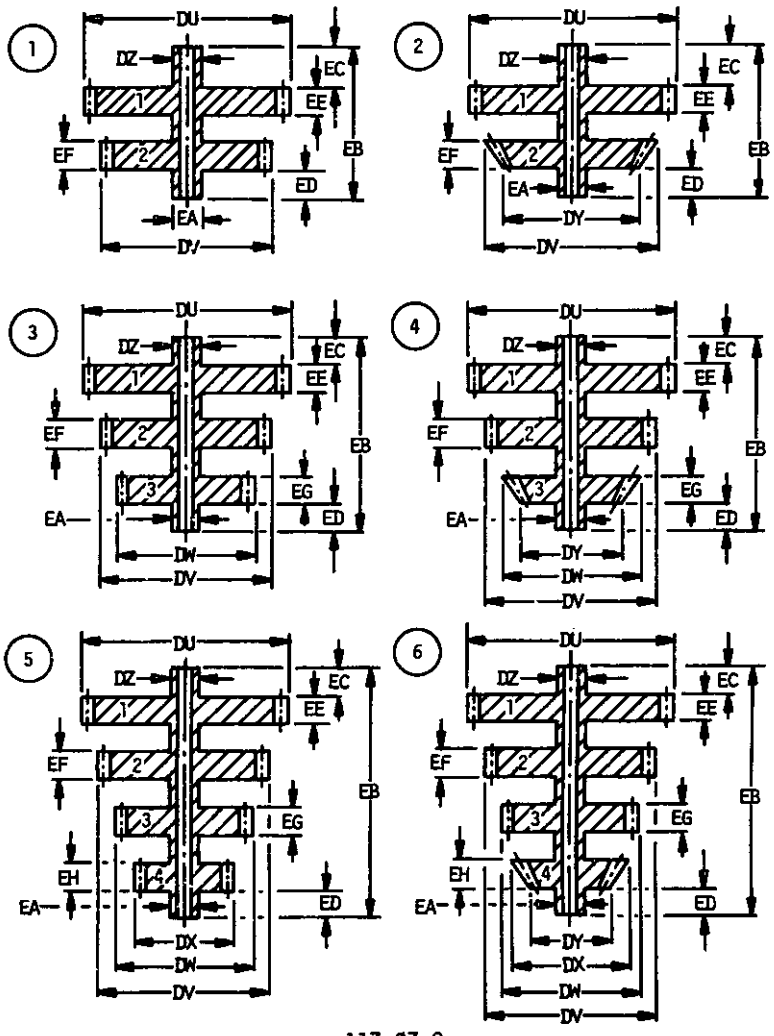


113-03-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

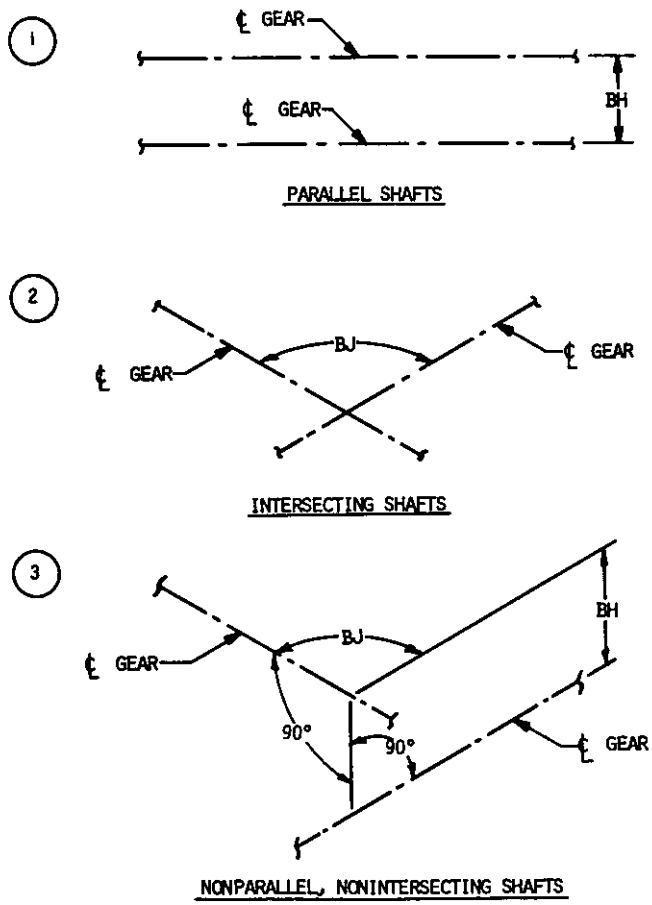


113-04-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

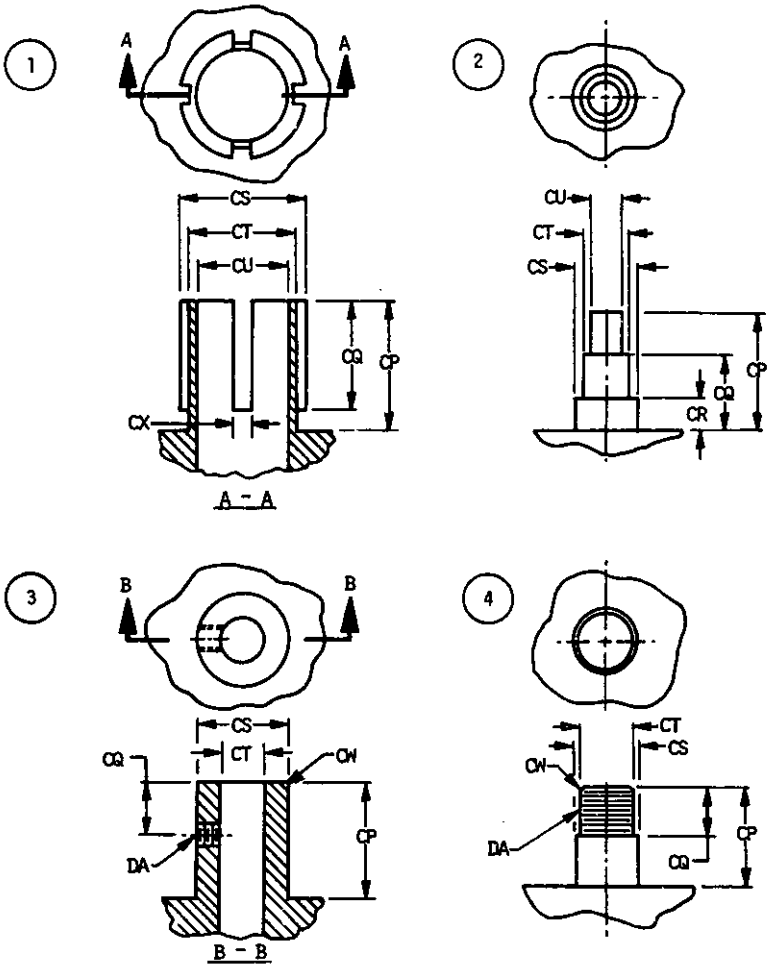


113-05-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

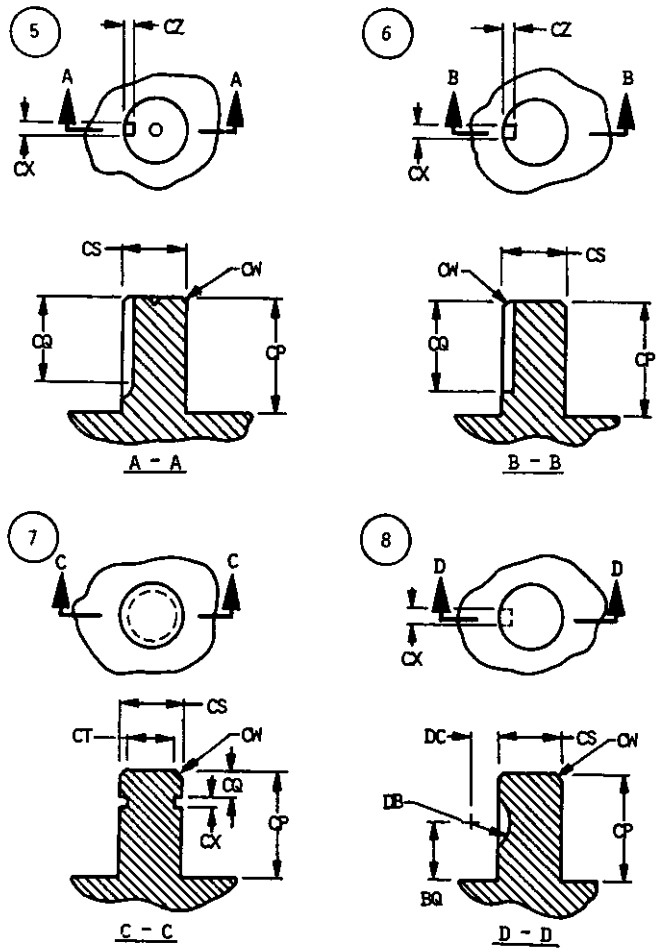


113-05-2

Source: https://assist.dla.mil/ Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

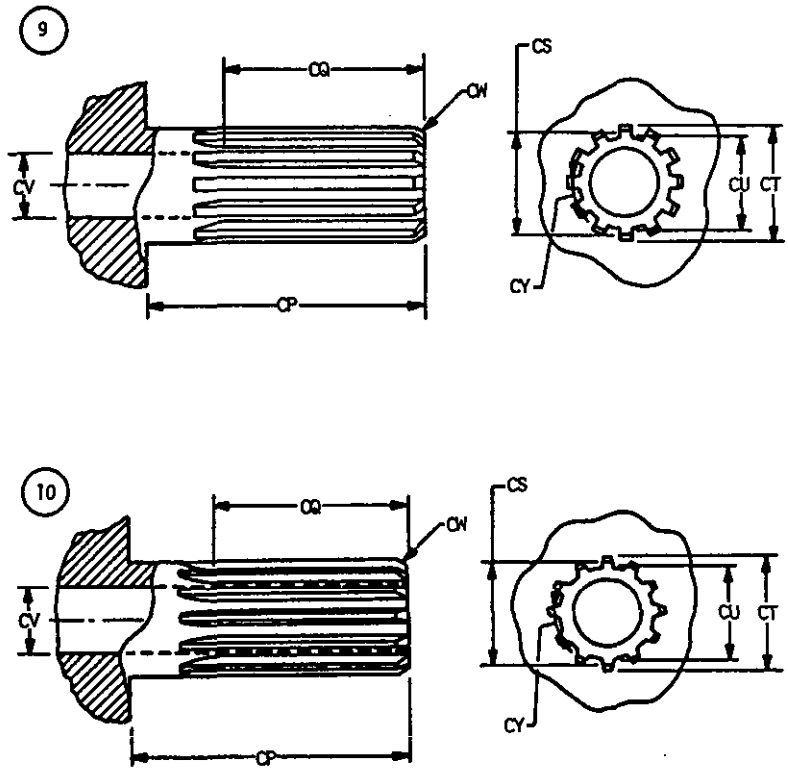


113-05-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

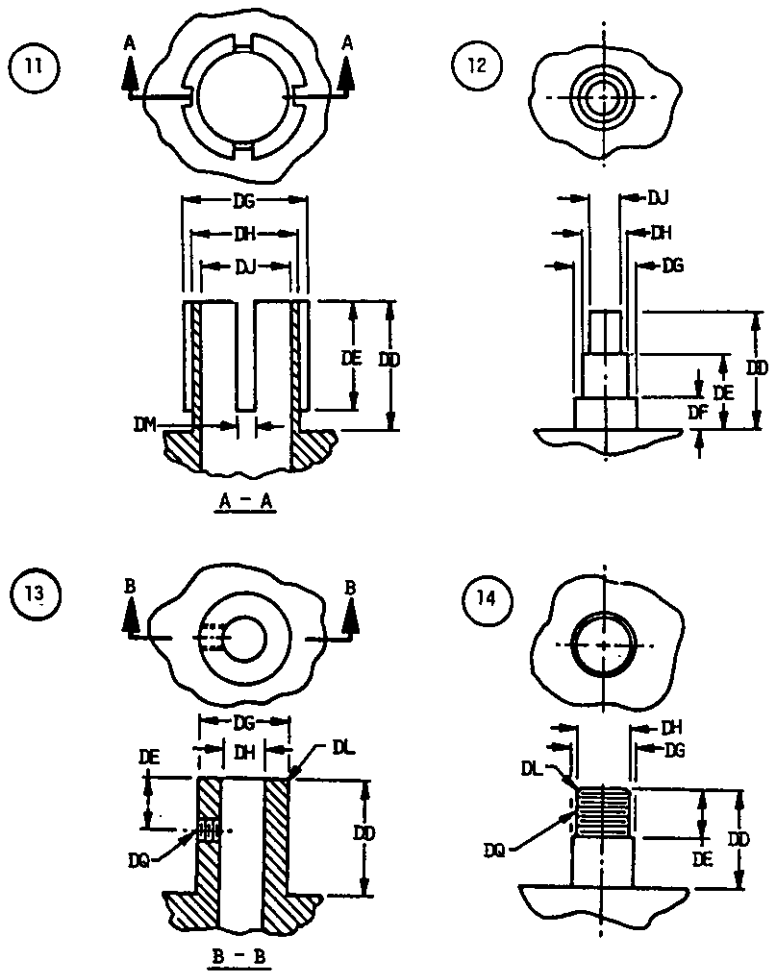


113-05-4

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

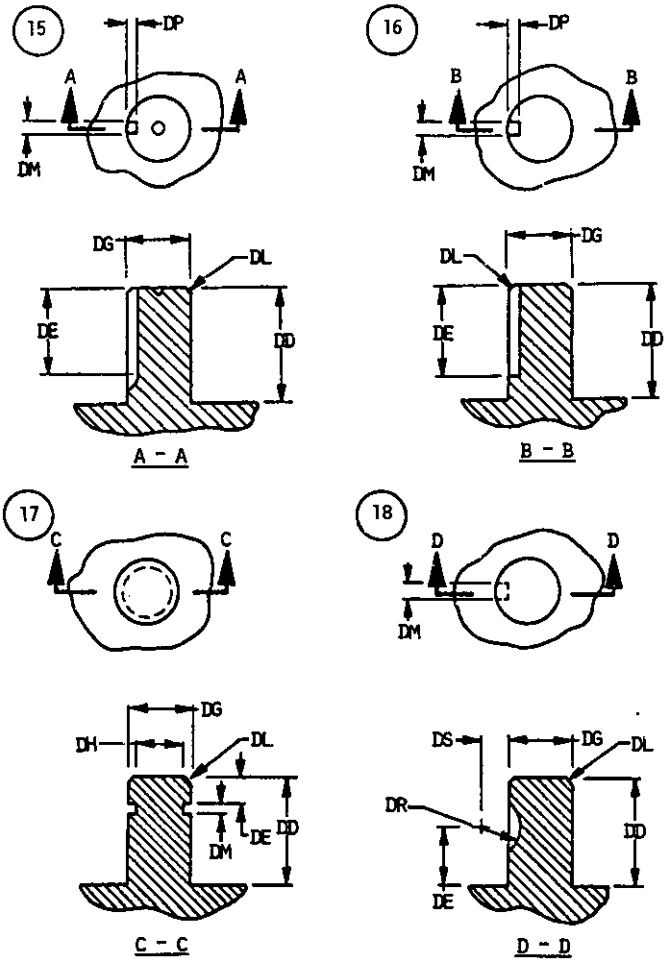


113-05-5

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

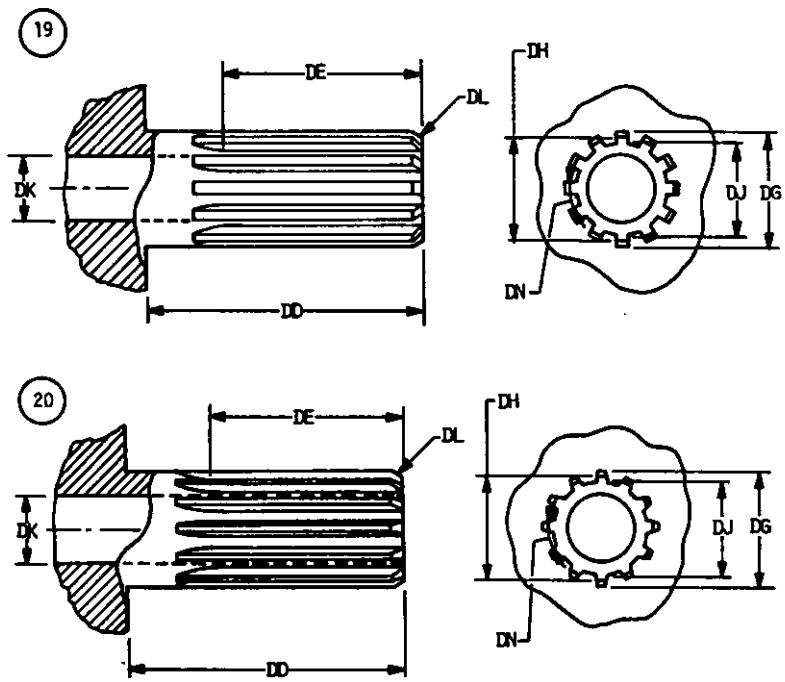


113-05-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

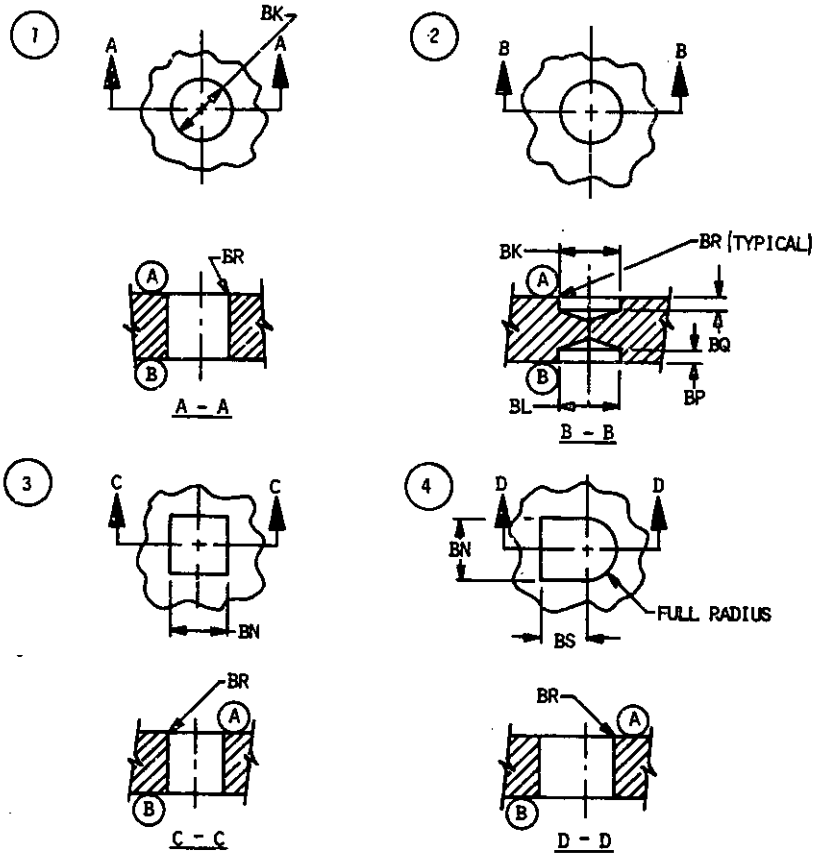


113-06-1

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

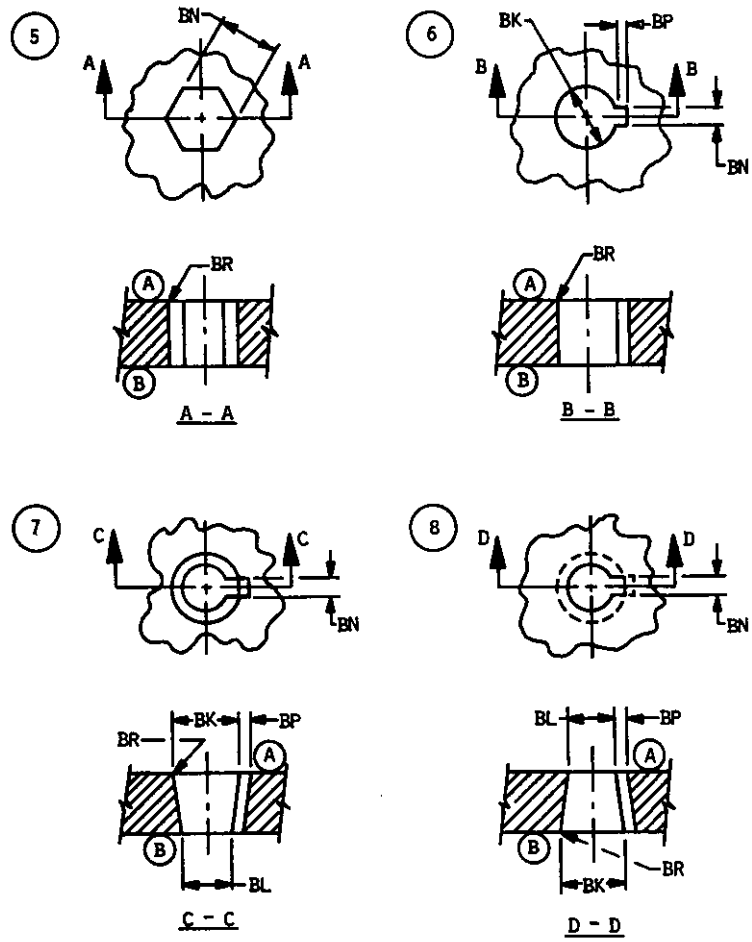


113-06-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

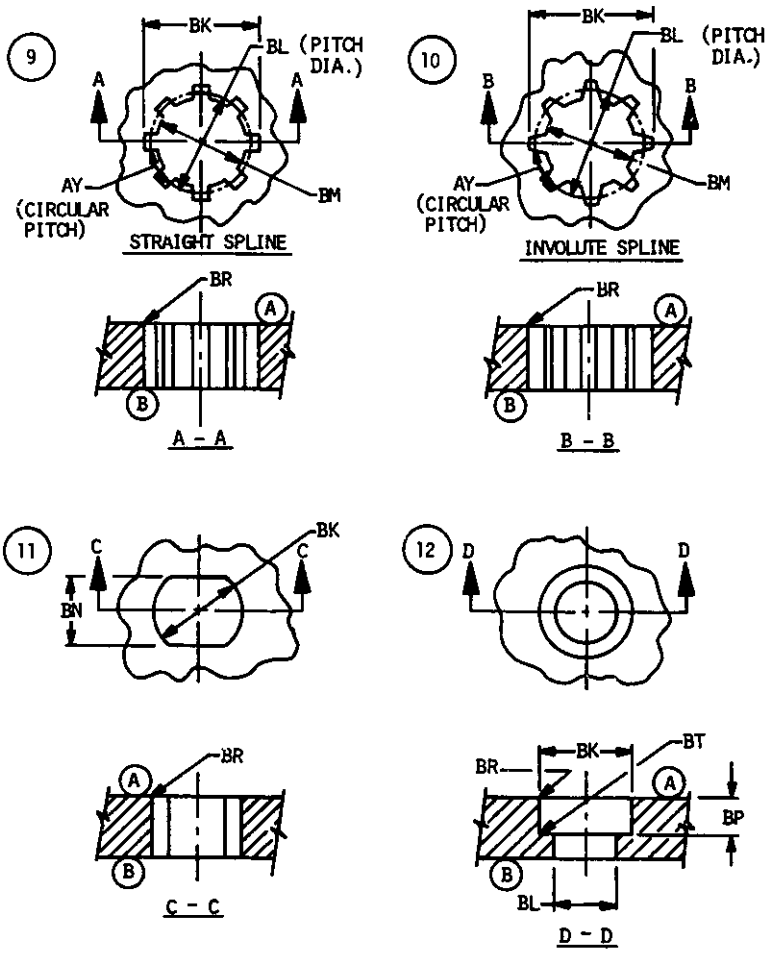


113-06-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

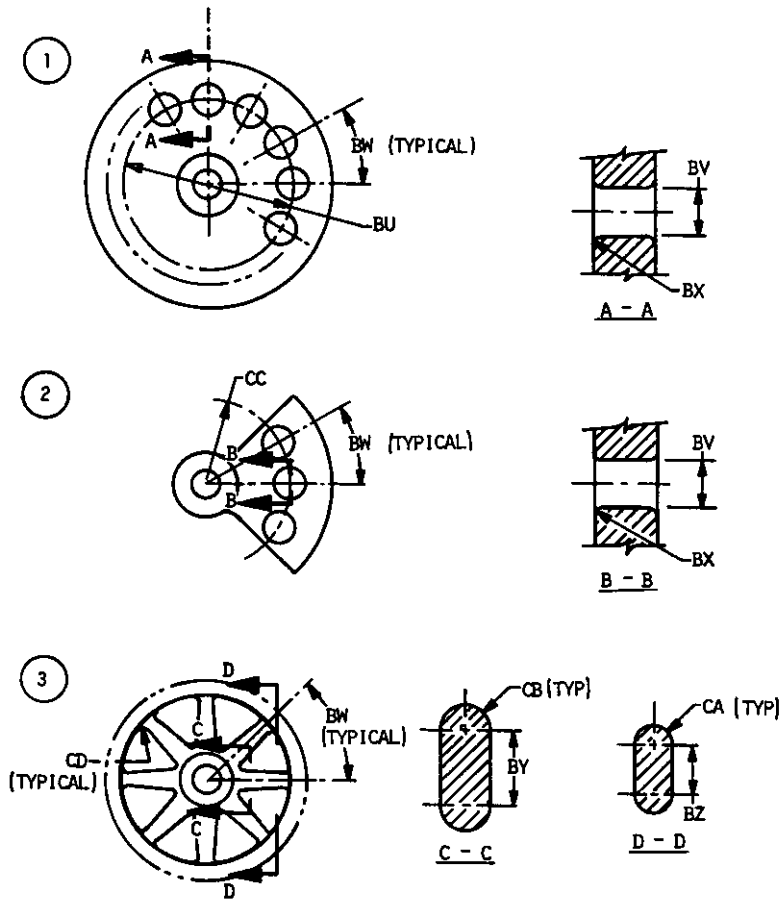


113-07-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

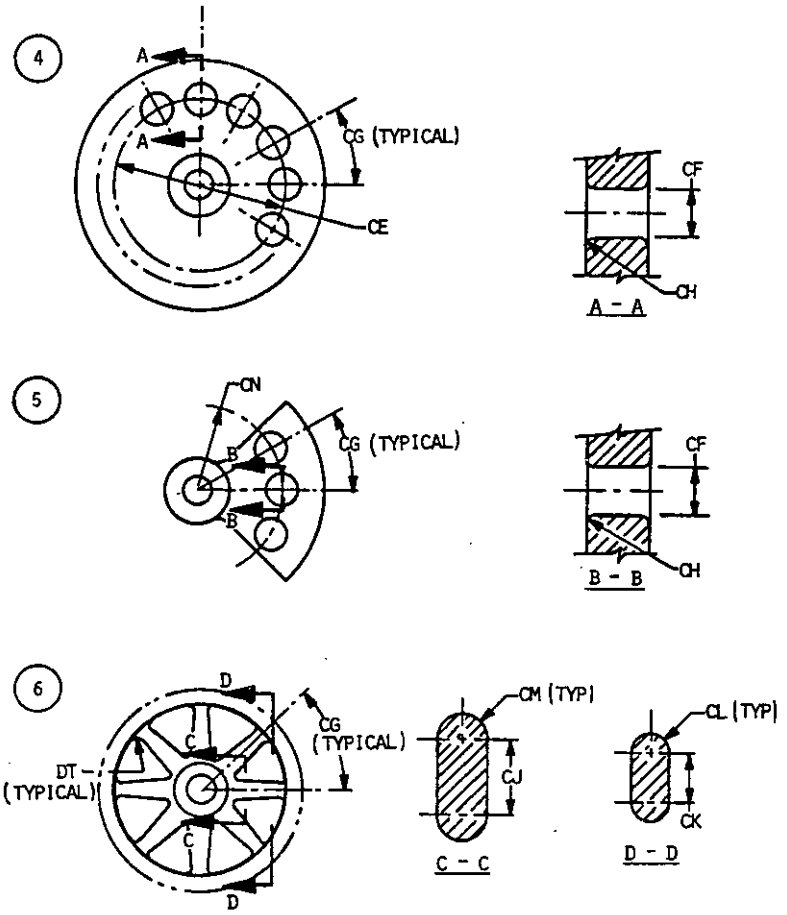


113-07-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

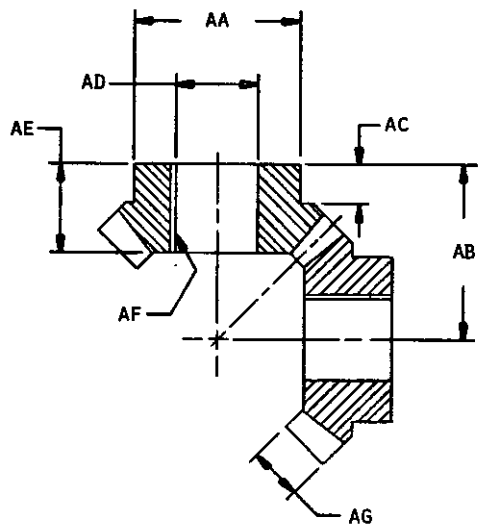


113-10-1

Source: https://assist.dla.mil/ Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

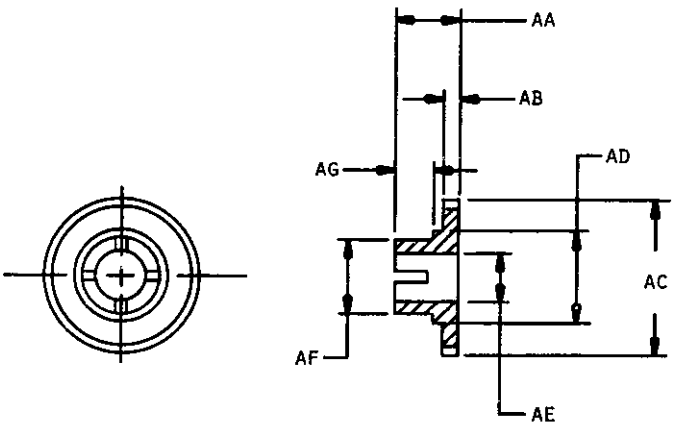


113-11-1

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

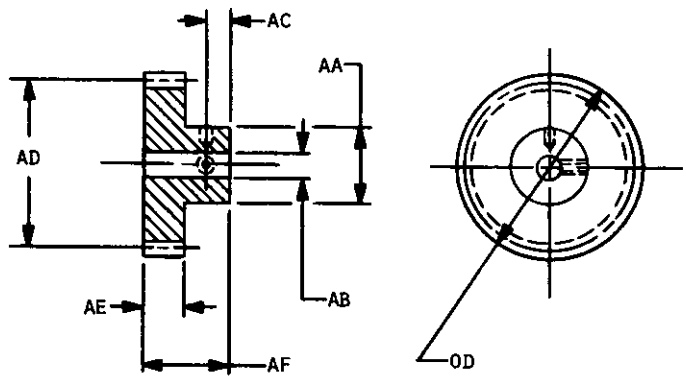


113-11-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

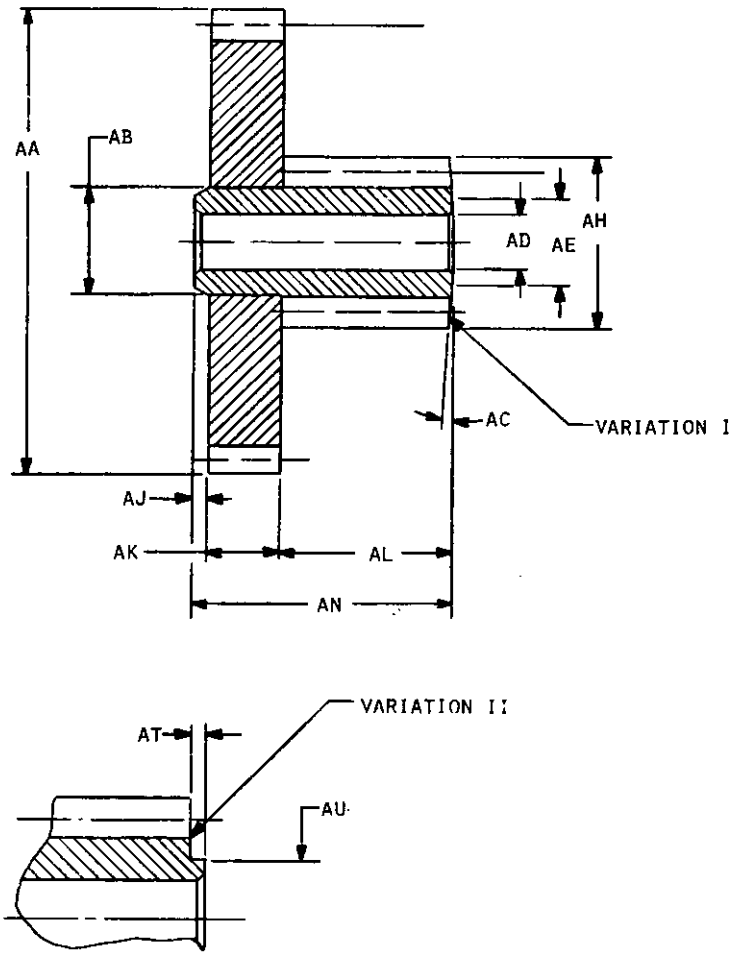


113-11-3

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

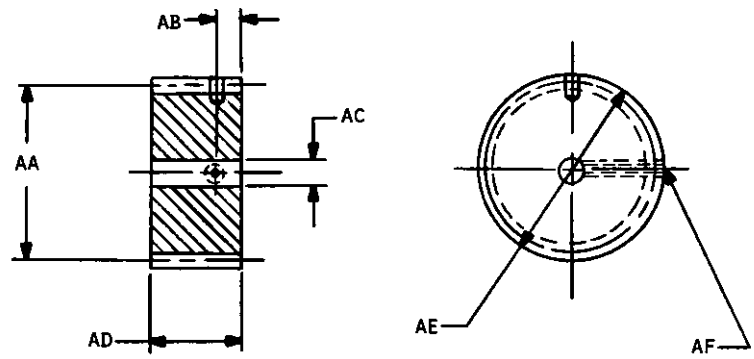


113-11-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

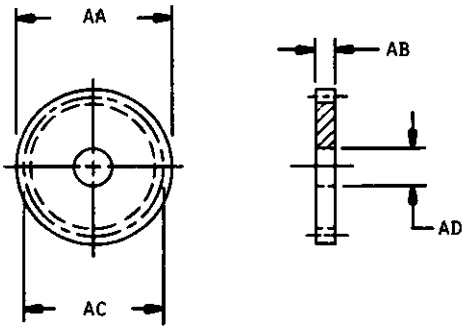


113-12-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

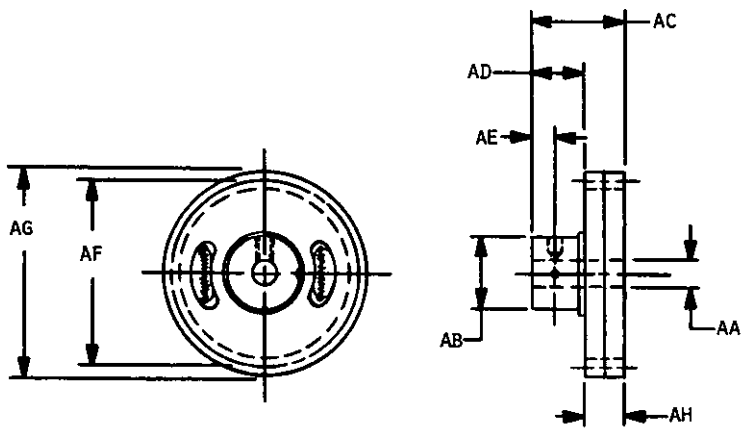

113-13-1


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

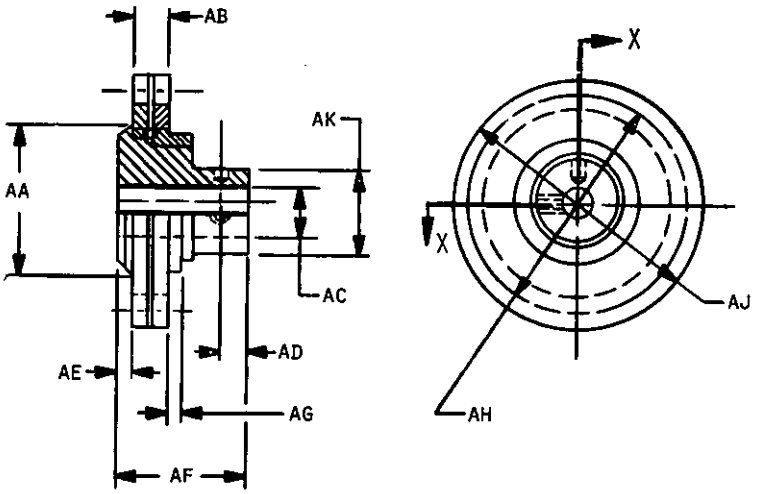


SECTION X-X

113-13-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

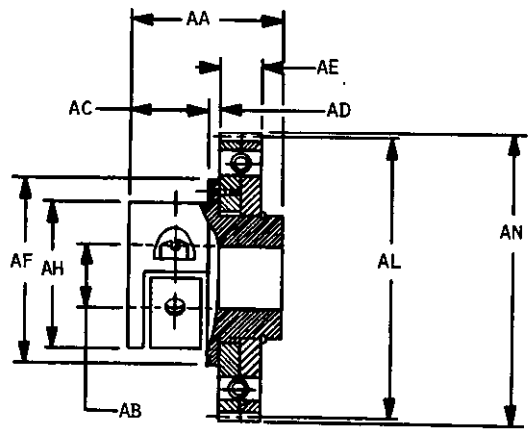

113-13-3

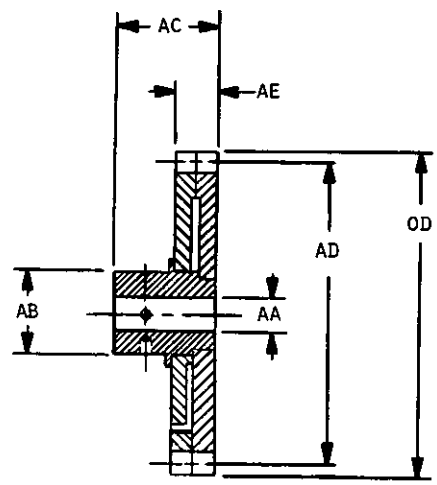

113-13-4

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	10	1670	22	1887	54	1994	58
0102	10	1674	24	1888	54	1996	58
0103	10	1676	24	1892	52	1998	58
0104	10	1690	26	1894	52	2000	58
0105	10	1692	26	1902	38	2002	60
0107	12	1694	26	1904	38	2004	60
0108	12	1696	26	1908	38	2006	60
0700	10	1712	36	1910	38	2008	60
0800	10	1714	36	1912	38	2014	44
1004	10	1716	36	1925	18	2016	44
1005	10	1718	36	1927	22	2018	50
1006	10	1730	26	1929	22	2022	54
1008	10	1732	28	1931	22	2024	54
1009	14	1734	28	1933	24	2026	54
1426	62	1736	28	1935	24	2028	54
1427	62	1738	28	1937	24	2030	60
1435	62	1740	28	1939	24	2032	60
1436	62	1742	28	1940	24	2036	54
1562	16	1744	28	1942	26	4200	32
1563	18	1746	28	1944	26	4201	32
1564	18	1770	50	1948	28	4202	32
1565	18	1774	50	1950	30	4203	32
1566	16	1776	50	1952	30	4204	32
1574	20	1780	28	1954	32	4205	32
1576	22	1784	28	1960	34	4206	32
1578	22	1790	28	1962	36	4207	32
1580	18	1792	30	1964	36	4209	34
1582	18	1794	30	1966	42	4210	34
1600	18	1796	30	1968	42	4212	34
1604	18	1842	58	1970	42	4214	34
1608	18	1844	58	1972	44	4216	34
1612	18	1848	56	1974	44	4218	34
1620	18	1852	56	1976	48	4716	42
1624	18	1854	56	1978	48	4754	40
1630	20	1862	36	1980	50	4755	40
1632	20	1864	36	1982	50	4760	38
1640	20	1868	34	1984	50	4761	38
1642	20	1870	34	1986	56	4767	40
1650	20	1882	52	1990	56	4777	42
1652	20	1884	54	1992	56	4778	42

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4783	52	6946	62				
4788	40	6991	68				
4791	40	6992	68				
4798	40	6993	68				
4799	40	6994	68				
4800	42	6995	68				
4815	40	6996	64				
4843	46	6997	64				
4857	46	7001	66				
4858	46	7002	66				
4871	40	7003	66				
4950	14	7004	66				
5297	48	7005	66				
6282	46	7021	64				
6283	48	7022	64				
6284	48	7023	64				
6285	46	7024	64				
6286	46	7572	14				
6287	46	7577	14				
6288	46	7580	16				
6289	48	7629	66				
6291	44	7630	66				
6334	42						
6335	42						
6337	42						
6353	52						
6354	52						
6356	52						
6357	52						
6369	10						
6371	44						
6372	66						
6870	66						
6873	10						
6874	12						
6941	14						
6942	14						
6943	62						
6944	62						
6945	62						

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Abrasive Resistance	34
Additional Part Marking	68
Additional Requirements	66
Aperture Cards Required	12
Applicable Documents	68
Base Document	10
City, State, Zip	10
Chemical Composition	36
Company Name/Command	10
Configuration	14
Contract Number/Office Symbol	10
Control	10
Design and Construction	16
Embrittlement Relief	38
Finishes	16
Format	10
Fungus	38
Government Design Activity	10
Humidity	40
Illustrations	14
Magnetic Permeability	42
Materials	16
Metals	16
Mounting Hardware	66
Mounting Structure	32
Nomenclature	68
Notes	68
Packaging	68
Part Marking	66
Part Numbering	12
Part Number Cross-Reference	68
Phone Number	10

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Quality Assurance Provisions	68
Radiographic	44
Radius Measurement	48
Requester FSCM	10
Requester's Name	10
Revision of AEDPS Document Number	12
Salt Spray/Fog	52
Scope	12
Source Table	12
Street Building	10
Stress Corrosion	52
Superseded Document	68
Surface Roughness	56
System Application	10
Tabulated Characteristics	16
Total Composite Error	58
Units of Measure	14
Vibration, Random	62
Weight	62
Workmanship	66

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of MIL-STD-35-49A (MI), dated 28 Sep 1984 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of MIL-STD-35-49A (MI), dated 28 Sep 1984 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF TI E ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Missile Command
Attn: AMSMI-EDS
Redstone Arsenal, AL 35898-5270

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-STD-35-49A	

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.