MIL-STD-35-51(MI)

5 JUNE 1974

MILITARY-STANDARD

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

SPROCKETS

FSC-EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL COMMAND
Washington, D.C. 20315

Automated Engineering
Document Preparation System,
MIL-STD-35-51(MI)

1. This Military Standard is approved by the U.S. Army Materiel Command, Department of the Army, and is mandatory for use by all its activities. All other military activities are required to employ this Standard where suitable.

2. Recommended corrections, additions or deletions should be addressed to Commander, U.S. Army Missile Command, ATTN: AMSMI-RCS, Redstone Arsenal, Alabama 35809.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of MIL-STD-35-51(MI) is to facilitate the preparation of Military Specification Exceptions for sprockets.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the basic MIL-STD-35, along with MIL-STD-35-1 for Materials, and MIL-STD-35-2 for Finishes.

3. It is important that the Procedure described in the basic document (MIL-STD-35) be followed explicitly in order for the computer to produce a document suitable for competitive procurement.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS

SECTION	TITLE	PAGE
1.0	Sprockets	1
1.1	Specification Title Index	3
1.2	Specification Requirements Instructions	5
1.2.1	General	5
1.2.1.1	Tabulation Table	6
1.2.2	Effectivity of Data	9
1.2.3	Writing Methodology	9
1.2.4	Characteristic Codes and Characteristic Value Codes	10
1.2.5	Sprocket Characteristics	11
1.2.6	Dimensions and Drawings	12
1.2.7	Materials and Finishes	12
1.2.8	Additional Requirements, Marking, Packaging, Quality Assurance and Notes	13
1.2.9	Applicable Documents	14
1.2.10	Quality Assurance and Conformance	16
1.2.11	Detailed Requirements	17
1.2.12	Date	17
1.2.13	FSCM/Code Ident of Requester	17
1.2.14	Prime Contract Number	17
1.2.15	Applicable General Specification	18

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION	TITLE	PAGE
1.2.16	Generated Document	18
1.2.17	Item Application	18
1.2.18	Drawing Figure Number(s)	18
1.2.19	Dimensions	18
1.2.20	Material	19
1.2.21	Finish	19
1.2.22	Design and Construction	20
1.2.23	Sprocket Data From MIL-S-52403	21
1.2.24	Eccentricity (Pitch Line)	22
1.2.25	Oscillation (Wobble) (Sideface)	22
1.2.26	Weight	23
1.2.27	Mechanical and Physical Properties	23
1.2.28	Torque	25
1.2.29	Fungus	25
1.2.30	Salt Fog	26
1.2.31	Humidity	27
1.2.32	Visual and Mechanical Examination	28
1.2.33	Preparation for Delivery	28
1.2.34	Workmanship	28
1.2.35	Supersession Data	29
1.2.36	Sources	29

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION	TITLE	PAGE
1.2.37	Material and Process Substitution	30
1.2.38	Test Data and Test Methods	30
1.2.39	Specification Requirements, Appendices, and SRS	31
1.2.40	Specification Requirements Sheet (SRS) Form	31
1.2.41	Searching for Existing Documents	32
1.2.41.1	General Requirements	32
1.2.41.2	Instructions	32
	Specification Requirements	35-46
	Quality Assurance Requirements	47-53
	Special Requirements	55,56
	Tables	57-60
	Appendices	61-78
1.3	Configuration and Drawings	79
1.3.1.	Figure Titles vs. Figure Numbers	81
1.3.2	Legend Index	83-86
Figures 115-01-1 thru 115-05-1		87-94
Reproducible Fold-out Specification Requirements Sheet (SRS) Form		95,97
Tabulation Table Form		99

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 1.0

SPROCKETS

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 1.1

SPECIFICATION TITLE INDEX

Specification Title Code*	Specification Title	Applicable Document
115991	Sprocket Wheels for Power Transmission and Conveying Chains	MIL-S-52403
115002	Sprocket, Roller Chain	MIL-S-52403
115003	Sprocket, Multiple Width, Roller Chain	MIL-S-52403
115904	Sprocket, Stepped, Roller Chain	MIL-S-52403
115905	Sprocket, Silent Chain	MIL-S-52403
115006	Sprocket, Multiple Width, Silent Chain	MIL-S-52403
115907	Sprocket, Stepped, Silent Chain	MIL-S-52403
115008	Sprocket, Timing Belt	MIL-S-52403

*Note - The six (6) digits of the title code are placed in the first six (6) digits of the simplified SRS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BUNK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 1.2

SPECIFICATION REQUIREMENTS INSTRUCTIONS

1.2.1 General

The purpose of this instruction is to establish the procedures to be followed, and the format to be used, for submission of requirements to obtain a computer generated procurement document.

Requirement definition is through the use of a Specification Requirement Sheet (SRS). Requirements are shown in the Specification Requirements List (Pages 35 through 46). The characteristic codes and values for these requirements are entered on the SRS (pages 95 and 97). Besides assisting the user in preparing his requirements for covers e by the Automated Engineering Document Preparation System (AEDPS), the SRS is used in formulating instructions to the computer.

Certain characteristic codes are mandatory to the preparation of a document by the computer. The designation for mandatory characteristic codes will be an asterisk (*) before the characteristic name. If the asterisk is at the far left edge, it is fully mandatory to get a satisfactory document. For example, Codes 1003 through 1009 must be completed. If the asterisk is by an indentured item, it is mandatory only for the item above it that is not indentured to the same extent. For example, if Code 6871 is desired, Code 6872 must also be completed. Most characteristic codes will generate paragraphs. Other characteristic codes will be required for comparison purposes only or for inclusion in separate characteristic tables.

The document generated by the AEDPS automatically refers to the referenced specification for established requirements and mandatory tests. If added test(s) or changes to existing test(s) are required, the requirement(s) for these test(s) must be specified. This can be accomplished by selecting the proper code(s) from the Specification Requirements List and completing the required Appendix.

Reproducible copies of the SRS are located immediately following the Figures in Section 1.3. They are to be locally reproduced and used for submittal of request for documentation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Characteristics that are not absolutely essential for proper identification and establishment of requirements should be omitted. Many nonstandard items become cost prohibitive through OVER-SPECIFYING, When the requirements and tests in the specification referenced with Code 1006 meet the user's requirements, parameters (codes) which are void of an asterisk (*), at the far left edge of the Specification Requirements List, should not be used.

1.2.1.1 Tabulation Table

The AEDPS has the capability for documenting a number of parts on a single specification. This subparagraph provides the instructions necessary to use this capability: A removable foldout Tabulation Table form is furnished following the SRS forms located in Section 1.3. This form is to be locally reproduced for use in submitting requests for computer generated Military Specification, Exceptions. An example of Tabulation Table usage is detailed in the following paragraphs.

The Tabulation Table provides the capability for tabulation of 50 items and up to 10 variables per item. The SRS form may be used in lieu of the Tabulation Table for reasons of convenience or necessity due to write-in space limitations. If the SRS form is used, each pertinent Characteristic Code and corresponding value(s) must be transposed to the SRS using the rules outlined in 1.2.1.

In using the Tabulation Table, for example, it may be required that several sprockets be specified, all having the same body style but of different materials. Each sprocket will then be identified by a dash number assigned to the generated document basic part number, such as 01 through 04 as shown in the Tabulation Table illustration on the next page. On the Tabulation Table adjacent to Code 8000 is entered the Characteristic Code used to designate material for sprockets; in this case, Code 4921. Adjacent to each subsequent Characteristic Code in the first column is entered the 6-digit Characteristic Value Code for the desired material, as selected from MIL-STD-35-1. It may also be desirous to tabulate the material specifications that affect the materials listed. The Characteristic Code that represents the material specification, Code 4922 for sprockets, is entered adjacent to Code 8051 at the head of the second column. The number of the specification is entered adjacent to Code 8052 in the second column. All specifications listed in the Tabulation Table must also be listed on the SRS with an applicable code from Appendix B.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The Tabulation Table may also be used for tabulating dimensions from Appendix A. From the above example, it may be required that each sprocket outside diameter be different. Outside diameter in the sprocket figures is represented by the legend letters "AA" and Characteristic Code 1010 in Appendix A. It is not necessary to write-in the code for legend "AA" on the Tabulation Table, but it is necessary to specify the Characteristic Codes representing the minimum and/or the maximum dimensions. Minimum outside diameter, Code 1011, is entered adjacent to Code 8102 and/or maximum outside diameter, Code 1012, is entered adjacent to Code 8153. The minimum dimensional value for the dash-number 01 item is then specified with Code 8103 and the maximum dimensional value is specified with Code 8154, as applicable. Applicable dimensions or other values not requiring tabulation shall be specified on the SRS along with applicable code(s) (see 1.2.1).

The following will illustrate the proper usage of the Tabulation Table and Characteristic Codes for the example described above.

DASH NO.	CODE	CHARACTERISTIC CODE & VALUES FOR TABULATION	CODE	CHARACTERISTIC CODE & VALUES FOR TABULATION	CODE	CHARACTERISTIC CODE & VALUES FOR TABULATION	CODE	CHARACTERISTIC CODE & VALUES FOR TABULATION
	8000	4921#	8051	4922#	8102	1011#	8153	1012#
01	8001	BR0018#	8052	QQ-B-626#	8103	1.95#	8154	2.05#
02	8002	AL0036#	8053	QQ-A-250#	8104	7.40#	8155	7.60#
03	8003	STB044#	8054	MIL-T-7729#	8105	2.45#	8156	2.55#
04	8004	ST1025#	8055	MIL-T-5066#	8106	3.90#	8157	4.10#
05	8005		8056		8107		8158	
06	8006		8057		8108		8159	

In addition to applicable dimensional values from Appendix A, the following is a list of Characteristic Codes and titles that are candidates for Tabulation Table usage within the scope of this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABULATION CANDIDATES FOR SPROCKETS

Characteristic Code	Title
1611	Bore Style Number
1631	Number of Sprocket Teeth
1643	Bushing Type
1647	Number of Strands
1648	Chain Number
	Weight (Maximum)
1666	Pounds
1667	Ounces
1668	Grams
1627	Sprocket Type
1629	Sprocket Grade
1601	Body Style Number
1606	Hub Style Number
1616	Tooth Style Number
1621	Width Style Number
1633	Setscrew Type
1639	Keyway Type
1650	Number of Spokes
1651	Number of Lightening Holes
1652	Number of Rim Segments

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.2 Effectivity of Data

Preparation of an acceptable computer generated document is dependent upon clear, accurate, complete and concise delineation of the requirements on the SRS. The information provided on the SRS is furnished directly into the computer and any inaccuracies or inadequacies in the data submitted will directly affect the computer generated document.

1.2.3 Writing Methodology

The following rules govern the write-in values on the SRS and the Tabulation Table Form:

a. Only block lettering shall be used.

b. The letter "O" shall be a round circle.

c. The numeral zero shall be a round circle with a diagonal line through it "0".

d. The letter "I" shall have pronounced serifs top and bottom.

e. The numeral "one" shall be a straight vertical line " l".

f. The letter "Z" shall have a horizontal line through it "Z".

g. The "+" sign or the words "plus or minus" shall not be used. "+ or -" should be the form used, if needed.

h. The signs "$", "¢", or "!" shall never be used.

i. Except for materials (MIL-STD-35-1) and finishes (MIL-STD-35-2), abbreviations conforming to MIL-STD-12 may be used for reasons of convenience or write-in space limitations.

j. The pound sign "#" must never be used, except to indicate the end of a value or write-in, where it must always be used. If the last character of the write-in should fall in column 79 of the SRS, the pound sign "#" should not be placed in column 80. A new line should be started by placing a "1" in column 80 of the first line, a "2" in column 80 of the second line, and the pound sign "#" entered in column 17 of the second line. (A write-in shall never exceed 3 lines on the SRS as this is equal to the 189 character write-in limit.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

k. All fractions must be specified in decimal form. All values less than one (1.0) must be preceded by the numeral 0; i.e., 0.375.

l. When a write-in value is used to express percentage, the value must be followed by the word "percent", and not the sign "%". If (percent) is shown in the Specification Requirements, the word should not be repeated on the SRS.

m. When a write-in value is used to express temperature in degrees C (Celsius), the value must be followed by the word "degrees c" and not the sign "°C". If degrees C is shown on the Specification Requirements List as (degrees C), the word need not be repeated on the SRS as it will be provided automatically in the generated document.

n. When a write-in value is used to express a temperature that is "below zero" degrees C, the value must be preceded by the minus sign "-".

p. When it is required to express an exponential value on the SRS, such as 2.0 X 105, the value shall be written as follows: "2.0 X 10 TO THE 5TH POWER".

1.2.4 Characteristic Codes and Characteristic Value Codes

Each characteristic name which defines a requirement has been assigned a code number for use in the computer. These codes are referred to as characteristic codes, and are of a numeric value, therefore, all characteristic codes must have the zeroes slashed with a diagonal line (0) when entered on the SRS. Additional characteristic codes which are required to further define an item are contained in the appendices to the Specification Requirements. These are:

Dimension Characteristic Table	Appendix A (see 1.2.6)
Applicable Documents Table	Appendix B (see 1.2.9)
First Article Inspection Table	Appendix C (see 1.2.10)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Group A Quality Conformance Table	Appendix D (see 1.2.10)
Group B Quality Conformance Table	Appendix E-1 (See 1.2.10)
Group B Quality Conformance Table	Appendix E-2 (see 1.2.10)
Group C Quality Conformance Table	Appendix F (see 1.2.10)
Quality Conformance Sequence Table	Appendix G (see 1.2.10)
Deleted Test Table (Groups A, B, and C)	Appendix H (see 1.2.10)
Deleted First Article Tests	Appendix J (see 1.2.10)
Source Tabulation Table	Appendix S (see 1.2.36)

Note: It is not necessary to complete each Characteristic Code on each line of the Appendices or Tables. For example, if Code 6125 is used in Appendix C, Codes 6126, 6127 and 6128 need not be used on the SRS if *no* value or write-in is to be specified with these codes. When the computer document is generated, print-outs of specified Tables and Appendices will be similar in format to those shown in this document. Therefore, a blank space will be provided in that column and line where a Characteristic Code and value is not specified.

Specification titles, materials, and finishes have been assigned code numbers for computer use. These are referred to as Characteristic Value Codes. The Characteristic Value Codes required for completing the SRS are located as follows:

Specification Titles	Section 1.1
Materials	MIL-STD-35-1
Finishes	MIL-STD-35-2

1.2.5 Sprocket Characteristics

The sprocket characteristics are tabulated in the Specification Requirements List (SRL).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.6 Dimensions and Drawings

Dimensional Data must be supplied for all legends applicable to the sprocket selected in Section 1.3. All values must be in inches and must be in numerical decimal form. All values less than one (1.0) must be preceded by the numeral 0; ice., 0.375. The Dimension Table and related Characteristic Codes are provided as Appendix A. Both the minimum and maximum values and the legend letters shall be specified, as applicable. It is not necessary to complete each line or the entire Appendix A, just those codes that are applicable to the Drawing Figure used. When Appendix A is used with the SRS, Characteristic Codes representing the applicable legend letters must be placed on the SRS as well as the code number for the minimum and/or maximum dimensional data specified. If Appendix A is used in conjunction with the Tabulation Table, it is not necessary to specify the legend letter code, only the dimensional data code(s). For "reference", "nontolerance", and "thread dimensions", the dimension shall be placed in the minimum column and "REF", "NTOL", or thread type, such as "UNC" or "NEF", shall be placed in the maximum column. If length of thread is necessary, it must be entered in the minimum column, for example, 6-32X0.250.

Caution: When a Figure is shown in the Configuration and Drawing Section that might need a minor change, a copy of the marked up figure may be submitted with the SRS. When there is no figure shown that can be used without a major change, do not proceed. To have an unlisted item covered, a drawing with all dimensions must be furnished USAMICOM, Attn: AMSMI-RCS. A drawing with legend letters will be prepared, assigned a figure number and returned to the requester.

Dimensional Data may be tabulated by using the Tabulation Table form provided in this document. Usage of this table is detailed in 1.2.1.1.

1.2.7 Materials and Finishes

Whenever the Specification Requirements reference a material or finish, its code may be entered on the SRS with the 6 digit characteristic value code from the left-hand column of MIL-STD-35-1 or MIL-STD-35-2 as applicable. The material or finish nomenclature as shown in the center column will be the exact words that will appear in the generated document. When a material or finish specification is desired, it may be entered on the SRS with the applicable code from the Specification Requirements. Documents other than as specified in the right-hand column of MIL-STD-35-1 and MIL-STD-35-2 may be used, if necessary. Any document referenced must also be entered on the SRS with a code from Appendix B.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Note: When a desired material or finish is not shown, the system has the capability for accepting write-ins; i.e., "cold rolled steel" can be shown as a material and "black paint" may be shown as a finish.

To have an unlisted material or finish added to MIL-STD-35-1 or MIL-STD-35-2, the nomenclature and any applicable specifications for the desired material or finish must be furnished to USAMICOM, Attn: AMSMI-RCS. The assigned Characteristic Value Codes will be returned to the requester.

1.2.8 Additional Requirements, Marking, Packaging, Quality Assurance andNotes

Computer generated documents have the capability of accepting additional write-ins, over and above the parameters specified in the Specification Requirements by Specific Characteristic Codes. These write-ins will appear in the completed document as Section 3 for the Requirements and Marking, Section 4 for the Quality Assurance, Section 5 for the Packaging, and Section 6 for the Notes. Codes to be used are as follows:

Requirements	7001 through 7005
Marking	6991 through 6995
Quality Assurance	7011 through 7015
Packaging	7006 through 7010
Notes	7016 through 7020

These should be completed on the SRS using the codes shown above. The write-in should be in the exact words desired, but limited to 189 characters (including spaces and punctuation marks) for each characteristic code. When an additional requirement is added in Codes 7001 through 7005, an additional test is usually required (Codes 7011 through 7015).

Computer generated documents on sprockets will automatically have a requirement to package them in accordance with the document shown with Code 1006. If there are additional packaging requirements, these should be added through the use of Codes 7006 through 7010.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

If additional notes are required in Section 6, these should be stated using Characteristic Codes 7016 through 7020.

Part marking shall be in accordance with the document shown with Code 1006. Additional marking requirements may be specified on the SRS with appropriate code(s) between 6991 and 6995.

1.2.9 Applicable Documents

Any specification or other document entered as a characteristic value for any Characteristic Code must also be listed with a code from Appendix B, in their proper numerical sequence. only the number is required. Specification and/or document number entries shall be void of-blank spaces; i.e., a number, letter, or punctuation mark must occupy every space from the beginning to the end of the entry. It is not necessary to list titles.

In addition to the above, entry of the following documents may be necessary using appropriate codes from Appendix B:

a. H4-1 when the source table or Source Tabulation Table is used (Federal Supply Code for Manufacturers, United States and Canada, Name to Code).

b. When Code 1649 (Chain Number) is used, one of the following documents is to be referenced.

MIL-STD-627	Sprocket Wheels for Power Transmission and Conveying Chains
MIL-STD-421	Chain Roller: Power Transmission Conveyor, Flat Link Plates, Single Pitch, Single and Multiple Strand: Connecting Links and Attachment Links
MIL-STD-423	Chain Roller: Conveyor, Standard and Large Rollers, Flat Link Plates, Double Pitch, Single Strand, Connecting Links and Attachment Links

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

MIL-STD-424	Chain Roller: Power Transmission, Offset Sidebars, Single Pitch
MIL-STD-425	Chain, Silent: 60 Degree Inverted Tooth, Power Transmission

c. When Code 1687 (Torque) is used, the following specification is referenced:

MIL-S-52403	Sprocket Wheels for Power Transmission and Conveying Chains

d. When Code 4755 (Fungus), Code 4771 (Salt Fog) and/or Code 4790 (Humidity) is used, the following standard is referenced:

MIL-STD-810	Environmental Test Methods

e. NBS-HDBK-H28 when screw threads are specified (Screw Thread Standard for Federal Services).

f. If any of the codes in 1.2.23 (Sprocket Data) are used, the following document is to be referenced:

MIL-S-52403	Sprocket Wheels for Power Transmission and Conveying Chains

g. If Code 1635 (Setscrews Size) is used, one of the following documents must be referenced:

ANSI B18.3	Socket Cap, Shoulder and Set Screws
ANSI B18.6.2	Slotted Head Cap Screws, Square Head Set Screws, and Slotted Headless Set Screws

h. If Code 1641 (Keyways Size) is used, one of the following documents is to be referenced:

ANSI B17.1	Keys and Keyseats
ANSI B17.2	Woodruff Keys and Keyseats

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

i. If Code 1644 (Bushing Number Designation) is used, the following document is to be referenced:

MIL-STD-627	Sprocket Wheels for Power Transmission and Conveying Chains

1.2.10 Quality Assurance and Conformance

Quality Assurance requirements are mandatory to the preparation of an acceptable final document. Appendices C, D, E, F, G, H, and J are to be used when making changes to the First Article, Group A, B, and C inspections. Unless modified, these inspections will be in strict accordance with the procedures outlined in the applicable general specification. If it is desired to add, delete or modify the tests or sequence in any manner, the exceptions must be specified on the SRS with codes from the Quality Assurance Requirements and/or the applicable appendices. One requirement. must be selected from each of Group A, B and C. Enter an "X" in the value column by the selected Characteristic Code.

If Appendix D is used with Code 7031, the last three columns should be used to specify the sampling plan. If sampling, as specified in MIL-STD-105, is to be used, use Code 7033 with an "X" and specify the inspection level in the Quantity Inspected column, and the applicable AQL's in the "AQL" columns. The generated document will specify normal inspection, single sampling. If 100 percent sampling is to be used, use Code 7034 with an "X" and specify 100 percent in the Quantity Inspected column. If a limit is to be placed on the percent defective for 100 percent inspection, use Code 7035 and specify the maximum percent defective. If the tests to be performed are to be divided into subgroups, use Code 7036 with an "X"; the subgroup number should be shown in the Title column, and the sampling plan applicable to all tests in the subgroup should be shown in the remaining columns. The tests that make up the subgroup should be listed, in the order they are to be performed, in the Title column. The generated document will specify that all tests listed under a subgroup will be combined and inspected per the sampling plan specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Military Specification Exceptions will eliminate requirements for Qualification.

1.2.11 Detailed Requirements

A Specification Title Index (Section 1.1) with Characteristic Value Codes has been established for each title and the related applicable general specification. The Characteristic Value Code for the sprocket title selected must be entered in the title code block at the top of each page of the SRS. The six digits of the serial number shall-be shown and may be used for user internal control.

Caution: When there is no suitable Specification Title Code, do not proceed. To have a Specification Title Code assigned, a request must be forwarded to USAMICOM, Attn: AMSMI-RCS, giving the desired title along with the related applicable general specification. A code will be assigned and returned to the requester.

1.2.12 Date

The date the user desires to appear on his generated document must be written in military format with Code 1003 on the SRS; i.e., 3 July 1973. Do not abbreviate month of year. A space must appear between date, month and year.

1.2.13 FSCM/Code Ident of Requester

The requester's Federal Supply Code for Manufacturers (FSCM) shall be entered on the SRS with Code 1004. The FSCM can be obtained from Cataloging Handbook H4-1 when it is unknown.

1.2.14 Prime Contract Number

It is necessary for statistical purposes to have the contract number of the prime contract entered on the SRS with Code 1005. If the contract number is unknown, the requester's Contracts Department can furnish it. For government use, the abbreviated proper name and office symbol shall be used, i.e., "USAMICOM, AMSMI-RCS".

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.15 Applicable General Specification

The applicable general specification is the document to which an exception is being taken and can be found in the Specification Title Index in each part to this Standard. The specification must be entered on the SRS with Code 1006 (the slash sheet, MS number, or part number should be entered, if applicable to identify the item). The number must also be entered on the SRS with the appropriate code from Appendix B (without slash or part number). If MS numbers are used, these must also be shown on the SRS with code(s) from Appendix B. An example of how document numbers are to be shown with Code 1006 on the SRS is as follows: "1006MIL-S-52403#". Only the portion that is underlined in the example should be used with codes from Appendix B on the SRS.

1.2.16 Generated Document

The generated document provides exceptions to an existing specification. The existing specification details will be binding unless the generated document makes an exception. The combined provisions, requirements and tests of the two documents will then be the document for procurement.

1.2.17 Item Application

Code 1008 must show item application such as: next assembly drawing number or type of equipment, i.e., AN/GRC-19, MISSILE X, etc.

1.2.18 Drawing Figure Number(s)

Code 1009 must show the figure number selected from Section 1.3. Where it may be necessary to show more than one figure to describe an item, the figure numbers must be in correct sequence and as in the following example: "1009115-01-1 AND 115-02-1#".

1.2.19 Dimensions

Use Appendix A to complete the SRS with the required dimensions. See 1.2.6 for table fill-in instructions.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.20 Material

To specify the materials in accordance with the Material Table, enter on the SRS the codes from the appropriate columns of Table I, the Material Table, followed with the desired data to fill these columns. The column headings from Table I are listed as follows:

Component
Material (see MIL-STD-35-1)
Specification
Number or Alloy Number
Condition or Temper
Form
Class
Grade
Type
Composition

An example of the use of codes from appropriate columns of Table I is as follows:

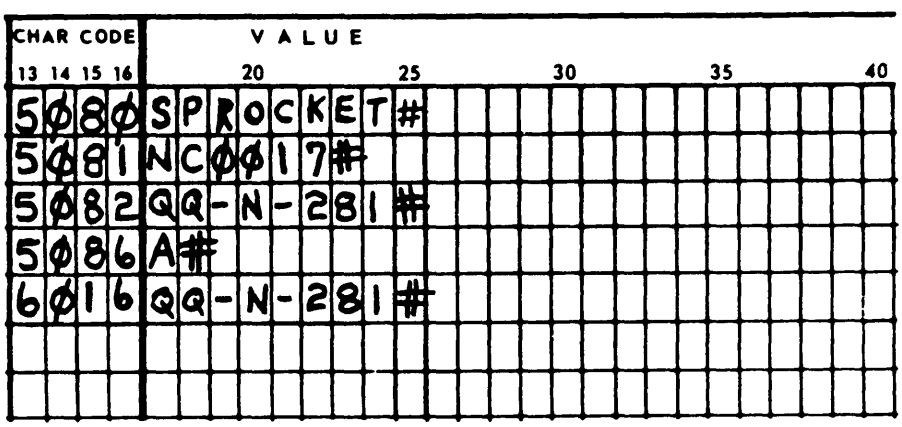

Note: If a specification(s) is referenced by using Code 5082, etc., the number of this document(s) must also be entered again on the SRS, using an appropriate code(s) from Appendix B (see 1.2.9).


1.2.21 Finish

To specify the finish in accordance with the Finish Table, enter on the SRS the codes from the appropriate columns of Table II, the Finish Table, followed with the desired data to fill these columns. The column headings from Table II are listed as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Component
Component Surface
Finish (see MIL-STD-35-2)
Specification
Class
Type
Grade
Color
Thickness (Maximum)
Thickness (Minimum)

An example of the use of codes from appropriate columns of Table II is as follows:

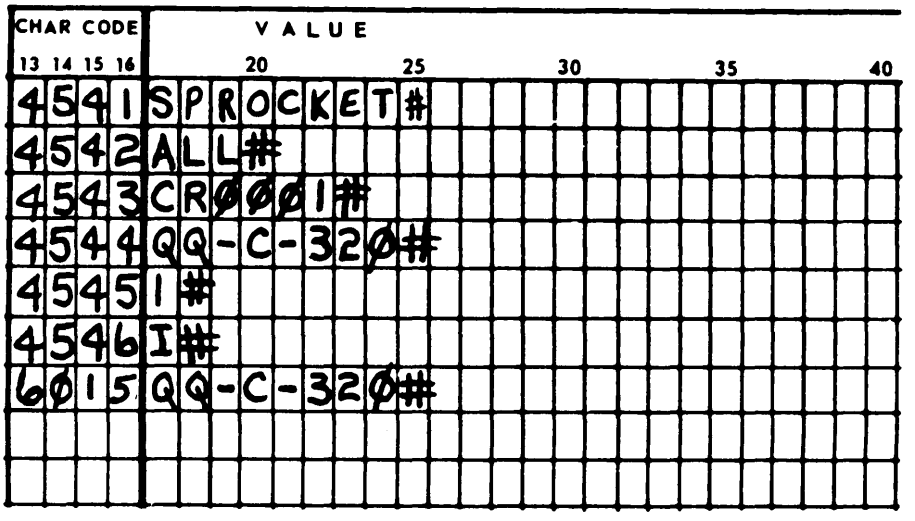

Note: If a specification(s) is referenced by using Code 4544, etc., the number of this document(s) must also be entered again on the SRS, using an appropriate code(s) from Appendix B (see 1.2.9).

1.2.22 Design and Construction

To specify the sprocket body style, enter Code 1600 on the SRS followed by the dash number of the figure (115-01-) on which the desired body style is shown. If Code 1600 is used, it is mandatory to enter Code 1601 on the SRS followed by the body style number from the selected figure. The figure number must also be added to those already entered with Code 1009 on the SRS (see 1.2.18).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

To specify the sprocket hub style, enter Code 1605 on the SRS followed by the dash number of the figure (115-02-_____) on which the desired hub style is shown. If Code 1605 is used, it is mandatory to enter Code 1606 on the SRS followed by the hub style number from the selected figure. The figure number must also be added to those already entered with Code 1009 on the SRS (see 1.2.18).

To specify the sprocket bore style, enter Code 1610 on the SRS followed by the dash number of the figure (115-03-_____) on which the desired bore style is shown. If Code 1610 is used, it is mandatory to enter Code 1611 on the SRS followed by the bore style number from the selected figure. The figure number must also be added to those already entered with Code 1009 on the SRS (see 1.2.18).

To specify the sprocket tooth style, enter Code 1615 on the SRS followed by the dash number of the figure (115-04-_____) on which the desired tooth style is shown. If Code 1615 is used, it is mandatory to enter Code 1616 on the SRS followed by the tooth style number from the selected figure. The figure number must also be added to those already entered with Code 1009 on the SRS (see 1.2.18).

To specify the sprocket multiple width style, enter Code 1620 on the SRS followed by the dash number of the figure (115-05-_____) on which the desired multiple width style is shown. If Code 1620 is used, it is mandatory to enter Code 1621 on the SRS followed by the multiple width style number from the selected figure. The figure number must also be added to those already entered with Code 1009 on the SRS (see 1.2.18).

1.2.23 Sprocket Data From MIL-S-52403

Sprocket data such as type, grade, number of sprocket teeth, etc., may be specified in accordance with MIL-S-52403 as discussed below. If any of these data are specified, enter MIL-S-52403 on the SRS with an appropriate code from Appendix B (see 1.2.9).

To specify the sprocket type, enter Code 1627 on the SRS followed by the desired type.

To specify the sprocket grade, enter Code 1629 on the SRS followed by the desired grade.

To specify the number of teeth for a single or multiwidth non-stepped sprocket, enter Code 1631 on the SRS followed by the desired number.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

To specify the number of teeth in a stepped sprocket, enter Codes 1700, 1701, 1702, 1703 and/or 1704 followed by the desired number for, respectively, the first, second, third, fourth and/or fifth wheel in the stepped sprocket.

To specify the setscrew type, setscrew size and/or number of setscrews, enter Code 1633, 1635 and/or 1637, respectively, on the SRS followed by the appropriate data.

To specify the keyway type, keyway size and/or number of keyways, enter Code 1639, 1641 and/or 1642, respectively, on the SRS followed by the appropriate data.

To specify the bushing type and/or the bushing number designation, enter Code 1643 and/or 1644, respectively on the SRS followed by the appropriate data.

To specify the number of strands (multiple width sprockets), enter Code 1647 on the SRS followed by the number.

To specify the chain number, enter Code 1648 on the SRS followed by the number. If the chain number is specified, it is mandatory to reference the specification which contains the chain number by entering Code 1649 on the SRS followed by the number of the specification. If a specification is referenced, also enter the specification number on the SRS with an appropriate code from Appendix B (see 1.2.9).

To specify the number of spokes, enter Code 1650 on the SRS followed by the number.

To specify the number of lightening holes, enter Code 1651 on the SRS followed by the number.

To specify the number of rim segments, enter Code 1652 on the SRS followed by the number.

1.2.24 Eccentricity (Pitch Line)

To specify the eccentricity (pitch line) deviation, enter Code 1660 on the SRS followed by the total allowable indicator reading in inches.

1.2.25 Oscillation (Wobble) (Sideface)

To specify the oscillation (wobble) (sideface) deviation, enter Code 1665 on the SRS followed by the total allowable indicator reading in inches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.26 Weight

To specify the sprocket weight, enter Code 1666, 1667 or 1668 on the SRS followed by the value in pounds, ounces or grams, respectively.

1.2.27 Mechanical and Physical Properties


If the test procedure shown in the document referenced by using Code 1006 is sufficient, enter Code 1670 on the SRS followed by an "X".

If it is desired to take exception to the test procedure shown in the document referenced by using Code 1006, enter Code 1671 on the SRS and complete the sentence shown with Code 1671 in the SRL, using 189 characters or less including punctuation and spaces.

To specify testing in accordance with Table III, the Mechanical and Physical Properties Table, enter Code 1672 on the SRS followed by an "X". Also, enter the appropriate codes from the Component, Property, Test Method and Test Specification columns of Table III on the SRS followed with the desired data to fill these columns. See 1.2.6 for additional instructions on use of codes from a table. The fills (desired data) for each of the above columns should be limited as follows:

Component - 10 spaces
Property - 20 spaces
Test Method - 9 spaces
Test Specification - 20 spaces

An example of the use of codes from these columns of Table III is as follows:

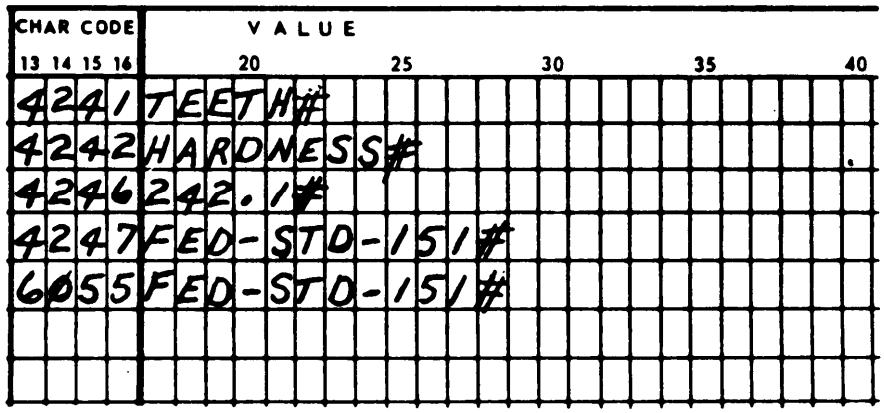

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Note: If a specification(s) is referenced by using Code 4247, etc., the number of this document(s) must also be entered again on the SRS, using an appropriate code(s) from Appendix B (see 1.2.9).


If the requirement shown in the document referenced by using Code 1006 is sufficient, enter Code 1673 on the SRS followed by an "X".

If it is desired to modify the requirement shown in the document referenced by using Code 1006, enter Code 1674 on the SRS and complete the sentence shown with Code 1674 in the SRL, using 189 characters or less including punctuation and spaces.

To specify requirements in accordance with Table III, the Mechanical and Physical Properties Table, enter Code 1675 on the SRS followed by an "X". Also, enter the appropriate codes from the Component, Property, Units, Minimum Value and Maximum Value columns of Table III on the SRS, followed with the desired data to fill these columns. See 1.2.6 for additional instructions on use of codes from a table. The fills (desired data) for each of the above columns should be limited as follows:

Component - 10 spaces
Property Units - 20 spaces
Units - 12 spaces
Minimum Value - 8 spaces
Maximum Value - 8 spaces

An example of the use of codes from these columns of Table III is as follows:

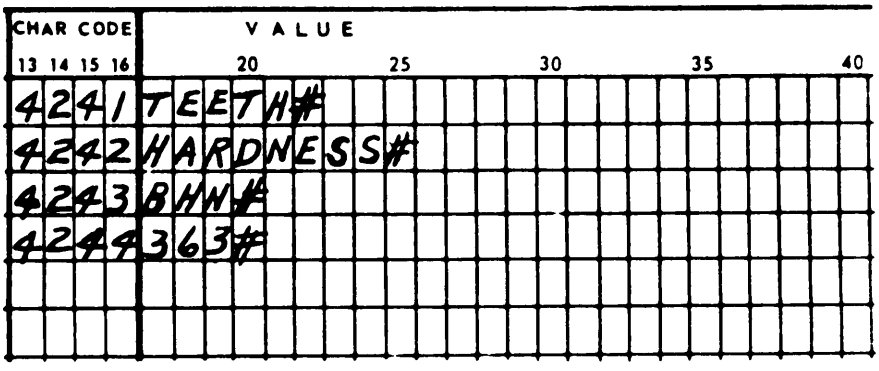

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.28 Torque

If the test procedure shown in the document referenced by using Code 1006 is sufficient, enter Code 1685 on the SRS followed by an "X".

If it is desired to take exception to the test procedure shown in the document referenced by using Code 1006, enter Code 1686 on the SRS and complete the sentence shown with Code 1686 in the SRL, using 189 characters or less including punctuation and spaces.

To specify that testing shall be in accordance with MIL-S-52403, enter Code 1687 on the SRS followed by an "X". If Code 1687 is used, enter MIL-S-52403 on the SRS with an appropriate code from Appendix B (see 1.2.9). To specify the torque load, enter Code 1688 on the SRS followed by the value in pound-feet.

If the requirement shown in the document referenced by using Code 1006 is sufficient, enter Code 1689 on the SRS followed by an "X".

If it is desired to modify the requirement shown in the document referenced by using Code 1006, enter Code 1690 on the SRS and complete the sentence shown with Code 1690 in the SRL, using 189 characters or less including punctuation and spaces.

To specify the requirement shown with Code 1691 in the SRL, enter Code 1691 on the SRS followed by an "X".

1.2.29 Fungus

If the test procedure shown in the document referenced by using Code 1006 is sufficient, enter Code 4753 on the SRS followed by an "X".

If it is desired to take exception to the test procedure shown in the document referenced by using Code 1006, enter Code 4754 on the SRS and complete the sentence shown with Code 4754 in the SRL, using 189 characters or less including punctuation and spaces.

To specify that testing shall be in accordance with Method 508 of MIL-STD-81O, enter Code 4755 on the SRS followed by an "X". If Code 4755 is used, enter MIL-STD-810 on the SRS with an appropriate code from Appendix B (see 1.2.9). To specify the test period, enter Code 4756 on the SRS followed by the value in days. To specify that after the test period, the test item shall be operated and inspected, enter Code 4757 on the SRS followed by an "X".

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

If the requirement shown in the document referenced by using Code 1006 is sufficient, enter Code 4758 on the SRS followed by an "X".

If it is desired to modify the requirement shown in the document referenced by using Code 1006, enter Code 4759 on the SRS and complete the sentence shown with Code 4759 in the SRL, using 189 characters or less including punctuation and spaces.

To specify that the sprocket material shall not be affected by fungus growth, enter Code 4760 on the SRS followed by an "X".

1.2.30 Salt Fog

If the test procedure shown in the document referenced by using Code 1006 is sufficient, enter Code 4769 on the SRS followed by an "X".

If it is desired to take exception to the test procedure shown in the document referenced by using Code 1006, enter Code 4770 on the SRS and complete the sentence shown with Code 4770 in the SRL, using 189 characters or less including punctuation and spaces.

To specify that testing shall be in accordance with MIL-STD-810, Method 509, Procedure I, enter Code 4771 on the SRS followed by an "X". If Code 4771 is used, enter MIL-STD-810 on the SRS with an appropriate code from Appendix B (see 1.2.9). To specify salinity, enter Code 4772 on the SRS followed by the value in percent. To specify the duration of exposure, enter Code 4773 on the SRS followed by the value in hours. To specify the exposure temperature, enter Code 4774 on the SRS followed by the value in degrees C. To specify special mounting, enter Code 4775 on the SRS and complete the sentence shown with Code 4775 in the SRL, using 189 characters or less including punctuation and spaces. To specify the drying period, enter Code 4776 on the SRS followed by the value in hours.

If the requirement shown in the document referenced by using Code 1006 is sufficient, enter Code 4784 on the SRS followed by an "X".

If it is desired to modify the requirement shown in the document referenced by using Code 1006, enter Code 4785 on the SRS and complete the sentence shown with Code 4785 in the SRL, using 189 characters or less including punctuation and spaces.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

To specify that the sprocket shall show no evidence of corrosion, enter Code 4786 on the SRS followed by an "X".

1.2.31 Humidity

If the test procedure shown in the document referenced by using Code 1006 is sufficient, enter Code 4787 on the SRS followed by an "X".

If it is desired to take exception to the test procedure shown in the document referenced by using Code 1006, enter Code 4788 on the SRS and complete the sentence shown with Code 4788 in the SRL, using 189 characters or less including punctuation and spaces.

To specify that testing shall be in accordance with Method 507 of MIL-STD-81O, it is mandatory to enter Code 4790 on the SRS followed by the test procedure number. If Code 4790 is used, enter MIL-STD-810 on the SRS with an appropriate code from Appendix B (see 1.2.9). To specify the time interval at which readings shall be taken, enter Code 4791 on the SRS followed by the value in hours. To specify that the conductivity method shall be used for determining water purity, enter Code 4792 on the SRS followed by an "X". (Specify only i f pH criteria is not applicable.) To specify that the test specimen shall be exposed to extreme temperature prior to testing, enter Code 4793 on the SRS followed by an "X". (Use Code 4793 only i f Test Procedure I is specified by using Code 4790.) To specify the number of test cycles (if other than standard), enter Code 4794 on the SRS followed by the number.

If the requirement shown in the document referenced by using Code 1006 is sufficient, enter Code 4795 on the SRS followed by an "X".


If it is desired to modify the requirement shown in the document referenced by using Code 1006, enter Code 4796 on the SRS and complete the sentence shown with Code 4796 in the SRL, using 189 characters or less including punctuation and spaces.

To Specify that there shall be no evidence of corrosion, enter Code 4797 on the SRS followed by an "X".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.32 Visual and Mechanical Examination

If it is desired to specify visual and mechanical examination in accordance with Table IV, the Visual and Mechanical Examination Table, enter the appropriate code(s) from the desired lines of Table IV on the SRS followed by an "X". An example of the use of codes from Table IV is as follows:

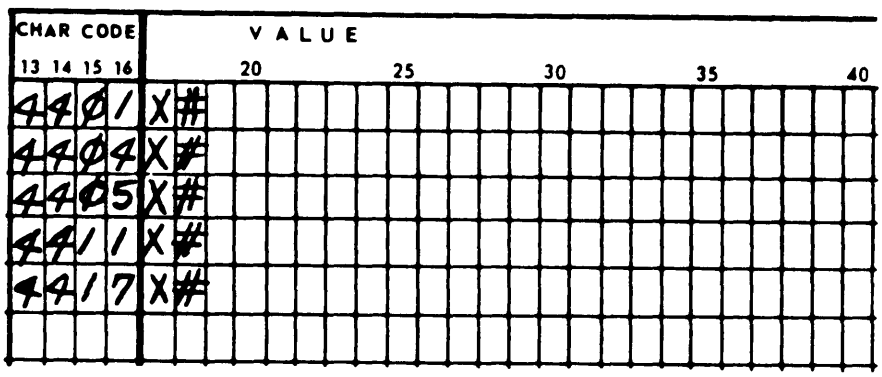

The line(s) selected by entering code(s) from Table IV on the SRS will be printed in the specification. For example, if Code 4401 is used the printout in the specification will be as follows:

Parameter	External Examination	Internal Examination
Dimensions	x	x

1.2.33 Preparation for Delivery

If a change in the preparation for delivery from the requirements shown in the specification referenced by using Code 1006 is desired, enter Code 1790 on the SRS followed by the number of the document in which the desired requirement appears.

1.2.34 Workmanship

If workmanship requirements are different than those defined in the specification shown with Code 1006, complete the sentence, "Workmanship shall be in accordance with _____", using Code 6870. Limit the write-in to 189 characters, including spaces and punctuation. If any document is referenced, it must also be entered on the SRS with a code from Appendix B.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.35 Supersession Data

When a document is being requested to supersede a purchase description or drawing, the superseded number and its date should be entered with Codes 6871 and 6872. The number shall be self-descriptive, such as, "Purchase Description PD-60425" or "Drawing 10059004" and the date should be in military format, i.e., 3 July 1968.


1.2.36 Sources

Code 6873, 6874 or Codes 7039 and/or 7040 must be used to specify that the item(s) be procured from one source (source control) or from one or more suggested sources (specification control). When a document is generated for a single item, an "X" is used on the SRS along with Code 6873 or 6874 and at least one line of the Source Table must be used (Codes 5001 and 5002). If the generated document is for multiple "dash-number" items, Characteristic Codes from the Source Tabulation Table along with applicable write-in data must be entered on the SRS, using the rules outlined in 1.2.40. Code(s) 7039 and/or 7040 may be used to specify source control and/or specification control for single item(s), group of items, or all items, if the Source Tabulation Table is used. When source control is to be specified, the dash number(s) of the item or group of items to be so controlled are entered on the SRS adjacent to Code 7039. Item(s) to be specification controlled are entered on the SRS adjacent to Code 7040. The Source Tabulation Table provides the capacity for tabulation of 50 items and up to 6 sources and manufacturer's part numbers per item. The Source Tabulation Table may be found in the Appendices, located at the end of Section 1.2. The following description and illustration is intended to show the proper usage of the Source Tabulation Table.

The first Characteristic Code from the Source Tabulation Table, Code 9051, is entered on the SRS along with the first dash-number, designated as "01" or a "block" of dash numbers; for example, "01 through 05". Block dash numbers may be specified when sources are the same, when no manufacturer's part numbers have been established or when manufacturer's part numbers are identical. Dash number "02" or "02 through 09", as applicable, is entered on the SRS adjacent to Code 9052 and so on, using as many first column Source Tabulation Table Characteristic Codes as necessary to specify the required dash numbers. Codes 9151 through 9156, located in the third column of the table, are used to specify the manufacturer's FSCM number(s) (Cataloging Handbook H4-1) for the first dash-number or "block" or dash-numbered items listed. The manufacturer's

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

name and address may also be added after the FSCM number. If the name and address is inserted, it need only be used with the first entry of the FSCM number. Codes 9451 through 9456 are used to specify the manufacturer's part number for the first dash-number or "block" of dash-numbered items listed. The part number (when known) must be exactly as shown by the manufacturer, including all dashes, punctuation, and spaces. All insertions and write-ins must be limited to 189 characters (including spaces between words, punctuation marks, and "pound-sign") for each Characteristic Code.

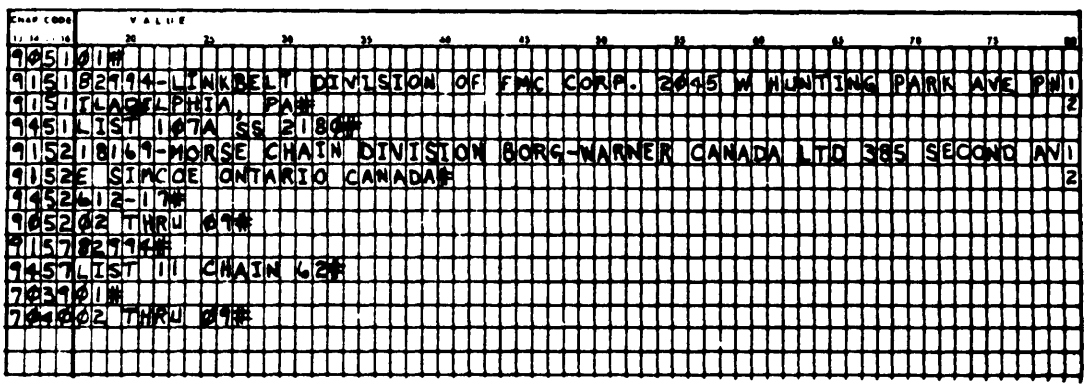

1.2.37 Material and Process Substitution

If it is desired to specify the requirement for material and process substitution shown with Code 6949 in the SRL, enter Code 6949 on the SRS followed by an "X".

1.2.38 Test Data and Test Methods

Recording Group A, B and/or C test data is not customary. Most component manufacturers have established "go-no go" test equipment for these inspection tests. Recording of data is usually "Special Handling" and results in increased costs. If it is desired that data be recorded, an "X" shall be entered after the applicable code. The specification will then require recording the data and require that it be available upon request.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Some manufacturers have developed individual test methods which yield results equivalent to those results obtainable by the customary military test. Should it be desired to permit alternate test methods *in* lieu of specified methods, place an "X" on the SRS with Code 1561. The supplier must then request approval to use alternate test methods and must demonstrate that the alternate methods do not relax the specified requirements. If strict adherence to the test methods specified is desired, this can be obtained by the use of an "X" with Code 1560. One must be selected.

1.2.39 Specification Requirements, Appendices and SRS

Preparation of an acceptable document by the computer is dependent upon two major factors. These are (1) correct selection of the appropriate Specification Requirements and their applicable codes, and (2) the proper application of the requirements and codes onto the SRS Form. The above is particularly important in the use of the various appendices.

1.2.40 Specification Requirements Sheet (SRS) Form

A form has been prepared to expedite and ease the preparation and submission of the requirements and parameters necessary for the computer to complete the process of "writing" a procurement document. It is important that the first 12 spaces be completed on each sheet. The next 4 numbered spaces (13, 14, 15 and 16) will contain the required Characteristic Codes; and the following 63 spaces (17 through 79) will be used for Characteristic Values. Each value must be ended by the use of the pound sign(#). The requester's complete name, mailing address and phone number must be at the top of each SRS submitted. If microfilm query is not completed, a hard copy will be furnished. Revision block is only to be used when a revision to an existing AEDPS is desired, and then only by the original requester or by a bonafide registered user.

Two removable fold-out SRS Forms are furnished following the Figures for each Generic Family of items. These forms are to be locally reproduced for use in submitting requests for computer generated Military Specification Exceptions. The first of the forms have the Characteristic Names and Characteristic Codes that are mandatory for each Generic Family. Where mandatory requirements are not specified on the form, any of the other Characteristic Codes in any of the Requirements, Tables, or Appendices can be used. The Characteristic Names are not required, but may be used if desired.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

A standard 80 column keypunch form may be used, provided the first 12 spaces on each line contain the specification Title Code and Serial Number.

Caution: Where write-in capability is utilized, the absolute limit is 189 characters for each code, including spaces and punctuation. (Where tables are used, the write-in capability should be limited as specified for each column of the table.) When the write-in exceeds 63 characters, it should continue into the next line. It is important to continue through space 79 even if it breaks a word, and continue in space 17 on the second line. If more than one line is used, each line must be numbered in space 80, i.e., 1, 2, etc., with the pound sign (#) at the end of the value on the last line. If only one line is used, numbering is not required.

1.2.41 Searching for Existing Documents

1.2.41.1 General Requirements

Before a request for a document is submitted, it is generally recommended that a search be initiated, to determine if a document already exists in the system that will adequately fulfill the requirement. This is particularly desirable when a document is desired for an item for which a wide range in one of the parameters could be acceptable.

1.2.41.2 Instructions

When a search only is desired, the SRS must be marked in large letters at the top of each sheet with the words "SEARCH ONLY" (See the example in MIL-STD-35). The system will then only look for Characteristic Codes furnished and will ignore all others. For example, if Code 1011 specified "1.00", the system will list all documents with this minimum dimension or if Code 1011 specified "1.00 ⋀ 2.50", the system will list all documents with a minimum dimension of 1 inch through 2.5 inches, providing all other characteristic values specified also match.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

This same philosophy applies to other characteristics; for example, if a value of "5Λ20" for the number of sprocket teeth (Code 1631) is supplied and no material is supplied, the system would list all documents having 5 sprocket teeth through 20 sprocket teeth and could show several materials.

Note: The symbol "Λ" is used between numeric values whenever a range of values is desired. The asterisk "*" on the basic SRS should be ignored by the requester for "SEARCH ONLY" usage.

Custodians:
Army-MI

User Activity:
Army-MU

Review Activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SL
Army-WC

Preparing Activity:
Army-MI
(Project EDS-A032)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.9	*Enter applicable codes from Appendix B and all referenced document numbers on the SRS.	
1.2.12	*Date	1003
1.2.13	*FSCM/Code Ident of Requester	1004
1.2.14	*Prime Contract Number	1005
1.2.15	*Applicable General Specification from Specification Title Index	1006
1.2.17	*Item Application	1008
1.2.18	*Drawing Figure Number(s)	1009
1.2.19	*Dimensions (Enter applicable codes, legends, and values on SRS Form from Appendix A) Note: If the Requirements and Quality Assurance Provisions in the Specification shown with Code 1006 meet the users requirements, Characteristic Codes without an asterisk "*" in the far left edge should not be used. The generated document will then specify all of the requirements and tests of the referenced Specification.	
1.2.1.1	Tabulation (See referenced paragraph for Tabulation Table usage)	
1.2.20	Material (Select if required) (Fill-in SRS using codes from Table I)	
1.2.21	Finish (Fill-in SRS using codes from Table II)	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.22	Design and Construction	
	Sprocket Body Style	
	The body shall conform to Figure Number 115-Ø1-_____.	1600
	*Style number _____.	1601
	Sprocket Hub Style	
	The hub shall conform to Figure Number 115-Ø2-_____.	1605
	*Style number _____.	1606
	Sprocket Bore Style	
	The bore shall conform to Figure Number 115-Ø3-_____.	1610
	*Style number _____.	1611
	Sprocket Tooth Style	
	The tooth shall conform to Figure Number 115-Ø4-_____.	1615
	*Style number _____.	1616
	Sprocket Multiple Width Style	
	The sprocket shall conform to Figure Number 115-Ø5-_____.	1620
	*Style number _____.	1621

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026Ø10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.23	Sprocket Data from MIL-S-52403	
	Sprocket type _____.	1627
	Sprocket grade _____.	1629
	Number of sprocket teeth _____. (Single or multiwidth, nonstepped sprocket)	1631
	or	
	Number of sprocket teeth (Stepped sprocket)	
	Sprocket Number 1 _____. (Use only for first wheel in stepped sprocket)	1700
	Sprocket Number 2 _____. (Use only for second wheel in stepped sprocket)	1701
	Sprocket Number 3 _____. (Use only for third wheel in stepped sprocket)	1702
	Sprocket Number 4 _____. (Use only for fourth wheel in stepped sprocket)	1703
	Sprocket Number 5 _____. (Use only for fifth wheel in stepped sprocket)	1704
	Setscrews	
	Type _____. (Specify dog point, cone point, etc.)	1633

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.23 Cont.	Size _____. (Specify number from ANSIB18.3 or ANSIB18.6.2)	1635
	Number of setscrews _____.	1637
	Keyways	
	Type _____. (Specify woodruff, square, etc.)	1639
	Size _____. (Specify number from ANSIB17.1 or ANSIB17.2)	1641
	Number of keyways _____.	1642
	Bushing	
	Type _____. (Specify type name)	1643
	Number designation _____. (Specify bushing number from Tables XXIV or XXV of MIL-STD-627)	1644
	Number of strands (Multiple width sprocket) _____.	1647
	Chain number _____.	1648
	*Document number _____ (See 1.2.9)	1649
	Number of spokes _____.	1650
	Number of lightening holes _____.	1651
	Number of rim segments _____.	1652

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.24	Eccentricity (Pitch Line)	
	Deviation _____ (Inches total indicator reading)	1660
1.2.25	Oscillation (Wobble) (Sideface)	
	Deviation _____ (Inches total indicator reading)	1665
1.2.26	Weight (Maximum)	
	Pounds _____.	1666
	or	
	Ounces _____.	1667
	or	
	Grams _____.	1668
1.2.27	Mechanical and Physical Properties	
	Test procedure (Select one if required)	
	Test per specification shown with Code 1006	1670
	or	
	Test per specification shown with Code 1006 except _____.	1671
	or	
	Test per Mechanical and Physical Properties Table	1672
	(Fill-in SRS using codes from Table III)	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.27 Cont.	Requirement (Select one if required) (Mandatory if either Code 1670, 1671 or 1672 is selected)	
	Requirements per specification shown with Code 1006	1673
	or	
	Requirements per specification shown with Code 1006 except _____.	1674
	or	
	Requirements per Mechanical and Physical Properties Table	1675
	(Fill-in SRS using codes from Table III)	
1.2.28	Torque	
	Test procedure (Select one if required)	
	Test per specification shown with Code 1006	1685
	or	
	Test per specification shown with Code 1006 except _____.	1686
	or	
	Test per MIL-S-52403	1687
	Torque load _____ (Pound-feet)	1688

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.28 Cont.	Requirement (Select one if required) (Mandatory if either Code 1685, 1686, 1687 or 1688 is selected)	
	Requirements per specification shown with Code 1006	1689
	or	
	Requirements per specification shown with Code 1006 except _____.	1690
	or	
	Requirements as follows:	
	Sprocket shall show no distortion, cracking or development of any defect including galling.	1691
1.2.29	Fungus	
	Test procedure (Select one if required)	
	Test per specification shown with Code 1006	4753
	or	
	Test per specification shown with Code 1006 except _____.	4754
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.29 Cont.	Test per Method 508 of MIL-STD-810.	4755
	Test period _____ (Days)	4756
	After test period, the test item shall be operated and then visually inspected.	4757
	Requirement (Select one if required) (Mandatory if either Code 4753, 4754 or 4755 is selected)	
	Requirements per specification shown with Code 1006	4758
	or	
	Requirements per specification shown with Code 1006 except _____.	4759
	or	
	Requirements as follows:	
	Sprocket material shall not be affected by fungus growth.	4760
1.2.30	Salt Fog	
	Test procedure (Select one if required)	
	Test per specification shown with Code 1006	4769
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.30 Cont.	Test per specification shown with Code 1006 except _____.	4770
	or	
	Test per Method 509, Procedure I, MIL-STD-810.	4771
	Salinity (Percent)	4772
	Duration of exposure (Hours)	4773
	Exposure temperature (Degrees C)	4774
	Special mounting shall be _____.	4775
	Drying period (Hours)	4776
	Requirement (Select one if required) (Mandatory if either Code 4769, 4770 or 4771 is selected)	
	Requirements per specification shown with Code 1006	4784
	or	
	Requirements per specification shown with Code 1006 except _____.	4785
	or	
	Requirements as follows:	
	The sprocket shall show no evidence of corrosion.	4786

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.31	Humidity	
	Test procedure (Select one if required)	
	Test per specification shown with Code 1006	4787
	or	
	Test per specification shown with Code 1006 except _____.	4788
	or	
	Test per Method 507 of MIL-STD-810.	
	*Test procedure number	4790
	Time intervals at which readings shall be taken. (Hours)	4791
	Method for determining water purity shall be conductivity method. (Select only if pH criteria is not applicable)	4792
	The test specimen shall be exposed to extreme temperature prior to testing (Use only if Test Procedure I is shown with Code 4790.)	4793
	Number of test cycles shall be _____. (If other than standard)	4794

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.31 Cont.	Requirement (Select one if required) (Mandatory if either Code 4787, 4788 or 4790 is selected)	
	Requirements per specification shown with Code 1006	4795
	or	
	Requirements per specification shown with Code 1006 except _____.	4796
	or	
	Requirements as follows:	
	There shall be no evidence of corrosion.	4797
1.2.32	Visual and Mechanical Examination (Select as required)	
	(Use codes from Table IV)	
1.2.33	Preparation for Delivery (If exception is required)	
	Preparation for delivery shall be in accordance with _____.	1790
1.2.34	Workmanship	
	Shall be in accordance with _____.	6870

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.35	Superseded Document	6871
	*Date	6872
1.2.36	*Source (Select one of the following. Complete at least one line of the Source Table except when source tabulation is used)	
	Source Control	6873
	or	
	Specification Control	6874
	or	
	Source Tabulation Table (Enter applicable codes on the SRS form from Appendix S)	
	Source Control Items _____.	7039
	Specification Control Items _____.	7040
1.2.37	Material and Process Substitution	
	Items furnished to this document shall be representative of a product which has been accepted by the procuring activity. No substitution of materials and processes or change in design shall be made without prior approval of the procuring activity when such change affects interchangeability with respect to installation, performance, or design within the requirements of this document.	6949

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.10	*First Article Inspection - Select One	
	First Article Inspection on this item in accordance with the testing in the applicable general specification and in the order specified herein. (Enter all required tests in desired order of testing on the SRS, using applicable codes from Appendix C.)	1540
	First Article Inspection on this item in accordance with the testing in the applicable general specification.	1541
	First Article Inspection not required.	1542
	First Article Inspection on this item in accordance with the testing in the applicable general specification except as shown on Appendix J. (Enter all tests to be deleted on the SRS, using applicable codes from Appendix J.)	7021
	First Article Inspection on this item in accordance with Appendix C. (Enter all required tests in desired order of testing on the SRS, using applicable codes from Appendix C.)	7022
	First Article Inspection on this item in accordance with the testing in the applicable general specification except _____.	7023

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

OUALITY ASSURANCE REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.38	First Article Test Data (Select one if required)	
	First Article Test Data	7024
	First Article Test Data on a similar item.	1543
1.2.10	*Group A Inspection - Select One	
	Group A inspection on this item in accordance with the applicable general military specification and in the order specified herein. (Enter all required tests in desired order of testing on the SRS, using applicable codes from Appendix D.)	1545
	Group A inspection on this item in accordance with the applicable general military specification with additional tests required. (Enter the added tests only on the SRS, using applicable codes from Appendix D. Enter the sequence on the SRS, using applicable codes from Appendix G.)	1546
	Group A inspection on this item in accordance with the applicable general military specification with certain tests deleted. (Enter deleted tests on the SRS, using applicable codes from Appendix H.)	1547
	Group A inspection on this item in accordance with the applicable general military specification.	1548

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.10 Cont.	Group A inspection on this item in accordance with Appendix D. (Enter all required tests in the desired order of testing on the SRS, using applicable codes from Appendix D.) (If this code is used, Code 7033 or 7034 is mandatory.)	7031
	*Group A sampling plan is specified in MIL-STD-105. (Enter inspection level and AQL on the SRS, using applicable codes from Appendix D.) (If sub groups are used, use Code 7036.)	7033
	Tests in each Group A inspection sub group shall be combined for inspection. (Use this code if Appendix D shows sub groups.)	7036
	or	
	*Group A sampling plan shall be 100 percent with defective units removed. (Enter 100 percent on the SRS, using applicable codes from Appendix D.)	7034
	Lot shall be rejected if defectives exceed _____ percent.	7035
	Group A inspection on this item in accordance with applicable general military specification except _____.	7032
	Group A inspection not required.	7047
1.2.38	Group A Test Data to be Recorded	1549

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

OUALITY ASSURANCE REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.10	*Group B Inspection - Select One	
	Group B inspection on this item in accordance with the applicable general specification and in the order specified herein. (Enter all required tests in desired order of testing on the SRS, using codes from Appendix E-1 or E-2 as applicable.)	1550
	Group B inspection on this item in accordance with the applicable general military specification with additional tests required. (Enter the added tests only on the SRS, using codes from Appendix E-1 or E-2 as applicable. Enter the sequence on the SRS, using applicable codes from Appendix G.)	1551
	Group B inspection on this item in accordance with the applicable general military specification with certain tests deleted. (Enter deleted tests on the SRS, using applicable codes from Appendix H.)	1552
	Group B inspection on this item in accordance with the applicable general military specification.	1553
	Group B inspection on similar items in accordance with the applicable general military specification.	1554
	Group B inspection not required.	7045

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.10 Cont.	Group B inspection on this item in accordance with Appendix E-1 for sample as specified in the table. (Enter all required tests in the desired order of testing on the SRS, using applicable codes from Appendix E-1.)	7041
	Group B inspection on this item in accordance with Appendix E-2 for statistical Sampling in accordance with MIL-STD-105. (Enter all required tests in desired order of testing on the SRS, using applicable codes from Appendix E-2.)	7044
	Group B inspection on this item in accordance with applicable general military specification except _____.	7042
1.2.38	Group B Test Data to be Recorded.	7043
1.2.10	Group C Inspection - Select One (If required)	
	Group C inspection on this item in accordance with the applicable general military specification and in the order specified herein. (Enter all required tests in desired order of test on the SRS, using applicable codes from Appendix F.)	1555
	Group C inspection on this item in accordance with the applicable general military specification with additional tests required. (Enter the added tests only on the SRS, using applicable codes from Appendix F. Enter the sequence on the SRS, using applicable codes from Appendix G.)	1556

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.10 Cont.	Group C inpsection on this item in accordance with the applicable general military specification with certain tests deleted. (Enter deleted tests on the SRS, using applicable codes from Appendix H.)	1557
	Group C inspection on this item in accordance with the applicable general military specification.	1558
	Group C inspection on similar items in accordance with the applicable general military specification.	1559
	Group C inspection on this item in accordance with Appendix F. (Enter all required tests in desired order of testing on the SRS, using applicable codes from Appendix F.)	7053
	Group C inspection not required.	7058
	Group C inspection on this item in accordance with applicable general military specification except _____.	7054
1.2.38	Group C Test Data to be Recorded.	7055
1.2.38	*Test Methods - Select One	
	As stated herein.	1560
	Alternate methods permitted.	1561

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.10	Inspection of Preparation for Delivery	
	As specified in Specification shown with Code 1006	1526
	or	
	As required to determine compliance with Section 5	1527
	Sampling plan shall be _____.	1528

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIAL REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.8	Additional Requirement(s) (List each requirement separately starting with Code 7001, 7002, etc. and limiting each to 189 characters including punctuation and spaces).	7001 7002 7003 7004 7005
1.2.8	Marking requirements (List each requirement separately starting with Code 6991, 6992, etc. and limiting each to 189 characters including punctuation and spaces).	6991 6992 6993 6994 6995
1.2.8	Additional Quality Assurance Provisions (List each item separately starting with Code 7011, 7012, etc. and limiting each to 189 characters including punctuation and spaces).	7011 7012 7013 7014 7015

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIAL REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.8	Packaging Requirement(s) for Section 5 (List each requirement separately starting with Code 7006, 7007, etc. and limiting each to 189 characters including punctuation and spaces).	7006 7007 7008 7009 7010
1.2.8	Additional Note(s) for Section 6 (List each requirement separately starting with Code 7016, 7017, etc. and limiting each to 189 characters including punctuation and spaces).	7016 7017 7018 7019 7020

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

(see 1.2.20)

TABLE I
MATERIAL TABLE

COMPONENT		MATERIAL		SPECIFICATION		NUMBER OR ALLOY NUMBER		CONDITION OR TEMPER		FORM		CLASS		GRADE		TYPE		COMPOSITION	
CODE	NAME	CODE	NUMBER FROM MIL-STD-35-1	CODE	NUMBER	CODE	NUMBER	CODE	NUMBER	CODE	NAME	CODE	NUMBER	CODE	NUMBER	CODE	NUMBER	CODE	NUMBER OR LETTER
5080		5081		5082		5083		5084		5085		5086		5087		5088		5089	
5090		5091		5092		5093		5094		5095		5096		5097		5098		5099	
5100		5101		5102		5103		5104		5105		5106		5107		5108		5109	
5110		5111		5112		5113		5114		5115		5116		5117		5118		5119	
5120		5121		5122		5123		5124		5125		5126		5127		5128		5129	
5130		5131		5132		5133		5134		5135		5136		5137		5138		5139	
5140		5141		5142		5143		5144		5145		5146		5147		5148		5149	
5150		5151		5152		5153		5154		5155		5156		5157		5158		5159	
5160		5161		5162		5163		5164		5165		5166		5167		5168		5169	
5170		5171		5172		5173		5174		5175		5176		5177		5178		5179	
5180		5181		5182		5183		5184		5185		5186		5187		5188		5189	
5190		5191		5192		5193		5194		5195		5196		5197		5198		5199	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

(see 1.2.21)

TABLE II
FINISH TABLE

COMPONENT		COMPONENT SURFACE		FINISH		SPECIFICATION		CLASS		TYPE		GRADE		COLOR		THICKNESS			
CODE	NAME	CODE	NAME	CODE	NUMBER FROM MIL-STD-35-2	CODE	NUMBER	CODE	NUMBER	CODE	NUMBER	CODE	NUMBER	CODE	NAME OR NUMBER FROM FED-STD-595	MAXIMUM		MINIMUM	
																CODE	INCH	CODE	INCH
4541		4542		4543		4544		4545		4546		4547		4548		4549		4550	
4551		4552		4553		4554		4555		4556		4557		4558		4559		4560	
4561		4562		4563		4564		4565		4566		4567		4568		4569		4570	
4571		4572		4573		4574		4575		4576		4577		4578		4579		4580	
4581		4582		4583		4584		4585		4586		4587		4588		4589		4590	
4591		4592		4593		4594		4595		4596		4597		4598		4599		4600	
4601		4602		4603		4604		4605		4606		4607		4608		4609		4610	
4611		4612		4613		4614		4615		4616		4617		4618		4619		4620	
4621		4622		4623		4624		4625		4626		4627		4628		4629		4630	
4631		4632		4633		4634		4635		4636		4637		4638		4639		4640	
4641		4642		4643		4644		4645		4646		4647		4648		4649		4650	
4651		4652		4653		4654		4655		4656		4657		4658		4659		4660	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE III
MECHANICAL AND PHYSICAL PROPERTIES TABLE

(see 1.2.27)

COMPONENT		PROPERTY		UNITS		MINIMUM		MAXIMUM		TEST		TEST	
CODE	NAME	CODE	NAME	CODE	NAME	CODE	VALUE	CODE	VALUE	CODE	METHOD	CODE	SPECIFICATION
4241		4242		4243		4244		4245		4246		4247	
4248		4249		4250		4251		4252		4253		4254	
4255		4256		4257		4258		4259		4260		4261	
4262		4263		4264		4265		4266		4267		4268	
4269		4270		4271		4272		4273		4274		4275	
4276		4277		4278		4279		4280		4281		4282	
4283		4284		4285		4286		4287		4288		4289	
4290		4291		4292		4293		4294		4295		4296	
4297		4298		4299		4300		4301		4302		4303	
4304		4305		4306		4307		4308		4309		4310	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE IV
VISUAL AND MECHANICAL EXAMINATION

(see 1.2.32)

CODE	PARAMETER	EXTERNAL EXAMINATION	INTERNAL EXAMINATION
4400	Finish	X	X
4401	Dimensions	X	X
4402	Sprocket Type	X	
4403	Sprocket Grade	X	
4404	Number of Teeth	X	
4405	Number Setscrews	X	
4406	Setscrew Type	X	
4407	Setscrew Size	X	
4409	Keyway Type	X	
4410	Keyway Size	X	
4411	Number of Keyways	X	
4412	Bushing Type	X	
4413	Bushing Number Designation	X	
4414	Number of Strands (Multiple Width Sprocket)	X	
4415	Chain Number	X	
4416	Chain Number Specification	X	
4417	Number Spokes	X	
4418	Number Lightening Holes	X	
4419	Number Rim Segments	X	
4420	Mechanical/Physical Properties	X	X
4421	Eccentricity (Pitch Line)	X	
4422	Oscillation	X	
4423	Weight	X	

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX A - DIMENSION CHARACTERISTIC TABLE

(see 1.2.6)

DIMENSION		MINIMUM		MAXIMUM	
CODE	LEGEND	CODE	VALUE	CODE	VALUE
1010	AA	1011		1012	
1013	AB	1014		1015	
1016	AC	1017		1018	
1019	AD	1020		1021	
1022	AE	1023		1024	
1025	AF	1026		1027	
1028	AG	1029		1030	
1031	AH	1032		1033	
1034	AJ	1035		1036	
1037	AK	1038		1039	
1040	AL	1041		1042	
1043	AM	1044		1045	
1046	AN	1047		1048	
1049	AP	1050		1051	
1052	AQ	1053		1054	
1055	AR	1056		1057	
1058	AS	1059		1060	
1061	AT	1062		1063	
1064	AU	1065		1066	
1067	AV	1068		1069	
1070	AW	1071		1072	
1073	AX	1074		1075	
1076	AY	1077		1078	
1079	AZ	1080		1081	
1082	BA	1083		1084	
1085	BB	1086		1087	
1088	BC	1089		1090	
1091	BD	1092		1093	
1094	BE	1095		1096	
1097	BF	1098		1099	

DIMENSION		MINIMUM		MAXIMUM	
CODE	LEGEND	CODE	VALUE	CODE	VALUE
1100	BG	1101		1102	
1103	BH	1104		1105	
1106	BJ	1107		1108	
1109	BK	1110		1111	
1112	BL	1113		1114	
1115	BM	1116		1117	
1118	BN	1119		1120	
1121	BP	1122		1123	
1124	BQ	1125		1126	
1127	BR	1128		1129	
1130	BS	1131		1132	
1133	BT	1134		1135	
1136	BU	1137		1138	
1139	BV	1140		1141	
1142	BW	1143		1144	
1145	BX	1146		1147	
1148	BY	1149		1150	
1151	BZ	1152		1153	
1154	CA	1155		1156	
1157	CB	1158		1159	
1160	CC	1161		1162	
1163	CD	1164		1165	
1166	CE	1167		1168	
1169	CF	1170		1171	
1172	CG	1173		1174	
1175	CH	1176		1177	
1178	CJ	1179		1180	
1181	CK	1182		1183	
1184	CL	1185		1186	
1187	CM	1188		1189	

Specification Requirement Sheet must contain applicable Codes, Legends, and Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

(see 1.2.6)

DIMENSION		MINIMUM		MAXIMUM	
CODE	LEGEND	CODE	VALUE	CODE	VALUE
1190	CN	1191		1192	
1193	CP	1194		1195	
1196	CQ	1197		1198	
1199	CR	1200		1201	
1202	CS	1203		1204	
1205	CT	1206		1207	
1208	CU	1209		1210	
1211	CV	1212		1213	
1214	CW	1215		1216	
1217	CX	1218		1219	
1220	CY	1221		1222	
1223	CZ	1224		1225	
1226	DA	1227		1228	
1229	DB	1230		1231	
1232	DC	1233		1234	
1235	DD	1236		1237	
1238	DE	1239		1240	
1241	DF	1242		1243	
1244	DG	1245		1246	
1247	DH	1248		1249	
1250	DJ	1251		1252	
1253	DK	1254		1255	
1256	DL	1257		1258	
1259	DM	1260		1261	
1262	DN	1263		1264	
1265	DP	1266		1267	
1268	DQ	1269		1270	
1271	DR	1272		1273	
1274	DS	1275		1276	
1277	DT	1278		1279	

DIMENSION		MINIMUM		MAXIMUM	
CODE	LEGEND	CODE	VALUE	CODE	VALUE
1280	DU	1281		1282	
1283	DV	1284		1285	
1286	DW	1287		1288	
1289	DX	1290		1291	
1292	DY	1293		1294	
1295	DZ	1296		1297	
1298	EA	1299		1300	
1301	EB	1302		1303	
1304	EC	1305		1306	
1307	ED	1308		1309	
1310	EE	1311		1312	
1313	EF	1314		1315	
1316	EG	1317		1318	
1319	EH	1320		1321	
1322	EJ	1323		1324	
1325	EK	1326		1327	
1328	EL	1329		1330	
1331	EM	1332		1333	
1334	EN	1335		1336	
1337	EP	1338		1339	
1340	EQ	1341		1342	
1343	ER	1344		1345	
1346	ES	1347		1348	
1349	ET	1350		1351	
1352	EU	1353		1354	
1355	EV	1356		1357	
1358	HT	1359		1360	
1361	ID	1362		1363	
1364	OD	1365		1366	
1367	TH	1368		1369	

Specification Requirement Sheet must contain applicable Codes, Legends, and Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX B - APPLICABLE DOCUMENTS

(see 1.2.9)

CHARACTER-ISTIC CODE	FEDERAL SPEC. NUMBER
6015	
6016	
6017	
6018	
6019	
6020	
6021	
6022	
6023	
6024	

CHARACTER-ISTIC CODE	MILITARY SPEC. NUMBER
6035	
6036	
6037	
6038	
6039	
6040	
6041	
6042	
6043	
6044	

CHARACTER-ISTIC CODE	FEDERAL STANDARD
6055	
6056	
6057	
6058	
6059	
6060	
6061	
6062	
6063	
6064	

CHARACTER-ISTIC CODE	MILITARY STANDARD
6075	
6076	
6077	
6078	
6079	
6080	
6081	
6082	
6083	
6084	

CHARACTER-ISTIC CODE	OTHER PUBLICATIONS
6095	
6096	
6097	
6098	
6099	
6100	

Specification Requirement Sheet must contain applicable Codes and Document Numbers

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX C - FIRST ARTICLE INSPECTION

(see 1.2.10)

GROUP NUMBER		TEST TITLE		NUMBER UNITS		ALLOWABLE FAILURES	
CODE	VALUE	CODE	VALUE	CODE	VALUE	CODE	VALUE
6125		6126		6127		6128	
6129		6130		6131		6132	
6133		6134		6135		6136	
6137		6138		6139		6140	
6141		6142		6143		6144	
6145		6146		6147		6148	
6149		6150		6151		6152	
6153		6154		6155		6156	
6157		6158		6159		6160	
6161		6162		6163		6164	
6165		6166		6167		6168	
6169		6170		6171		6172	
6173		6174		6175		6176	
6177		6178		6179		6180	
6181		6182		6183		6184	
6185		6186		6187		6188	
6189		6190		6191		6192	
6193		6194		6195		6196	
6197		6198		6199		6200	
6201		6202		6203		6204	
6205		6206		6207		6208	
6209		6210		6211		6212	
6213		6214		6215		6216	
6217		6218		6219		6220	
6221		6222		6223		6224	
6225		6226		6227		6228	
6229		6230		6231		6232	
6233		6234		6235		6236	
6237		6238		6239		6240	
6241		6242		6243		6244	
6245		6246		6247		6248	

Specification Requirement Sheet must contain Codes and applicable Values.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX D GROUP A QUALITY CONFORMANCE INSPECTION

(see 1.2.10)

TEST TITLE		QUANTITY INSPECTED		AQL			
				MAJOR		MINOR	
CODE	VALUE	CODE	VALUE	CODE	VALUE	CODE	VALUE
6315		6316		6317		6318	
6319		6320		6321		6322	
6323		6324		6325		6326	
6327		6328		6329		6330	
6331		6332		6333		6334	
6335		6336		6337		6338	
6339		6340		6341		6342	
6343		6344		6345		6346	
6347		6348		6349		6350	
6351		6352		6353		6354	
6355		6356		6357		6358	
6359		6360		6361		6362	
6363		6364		6365		6366	
6367		6368		6369		6370	
6371		6372		6373		6374	
6375		6376		6377		6378	

Specification Requirement Sheet must contain Codes and applicable Values.

SOURCE TABLE

(see 1.2.36)

SOURCE(S)			
CODE	FSCM	CODE	MFG. PART NO.
5001		5002	
5003		5004	
5005		5006	
5007		5008	
5009		5010	
5011		5012	

Specification Requirement Sheet must contain Codes, FSCM and Part Number.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX E-1 - GROUP QUALITY CONFORMANCE INSPECTION

(see 1.2.10)

TEST TITLE		FIXED SAMPLE PLAN			
		QUANTITY INSPECTED		DEFECTS ALLOWED	
CODE	VALUE	CODE	VALUE	CODE	VALUE
6410		6411		6412	
6413		6414		6415	
6416		6417		6418	
6419		6420		6421	
6422		6423		6424	
6425		6426		6427	
6428		6429		6430	
6431		6432		6433	
6434		6435		6436	
6437		6438		6439	
6440		6441		6442	
6443		6444		6445	
6446		6447		6448	
6449		6450		6451	
6452		6453		6454	
6455		6456		6457	
6458		6459		6460	
6461		6462		6463	
6464		6465		6466	
6467		6468		6469	
6470		6471		6472	
6473		6474		6475	
6476		6477		6478	
6479		6480		6481	
6482		6483		6484	

Specification Requirement Sheet must contain Codes and applicable Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX E-2 - GROUP B QUALITY CONFORMANCE INSPECTION

(see 1.2.10)

TEST TITLE		STATISTICAL SAMPLE PLAN			
		INSPECTION LEVEL		AQL	
CODE	VALUE	CODE	VALUE	CODE	VALUE
6410		6715		6716	
6413		6717		6718	
6416		6719		6720	
6419		6721		6722	
6422		6723		6724	
6425		6725		6726	
6428		6727		6728	
6431		6729		6730	
6434		6731		6732	
6437		6733		6734	
6440		6735		6736	
6443		6737		6738	
6446		6739		6740	
6449		6741		6742	
6452		6743		6744	
6455		6745		6746	
6458		6747		6748	
6461		6749		6750	
6464		6751		6752	
6467		6753		6754	
6470		6755		6756	
6473		6757		6758	
6476		6759		6760	
6479		6761		6762	
6482		6763		6764	

Specification Requirement Sheet must contain Codes and applicable Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX F - GROUP C QUALITY CONFORMANCE INSPECTION

(see 1.2.10)

TEST TITLE		QUANTITY INSPECTED		DEFECTS ALLOWED	
CODE	VALUE	CODE	VALUE	CODE	VALUE
6525		6526		6527	
6528		6529		6530	
6531		6532		6533	
6534		6535		6536	
6537		6538		6539	
6540		6541		6542	
6543		6544		6545	
6546		6547		6548	
6549		6550		6551	
6552		6553		6554	
6555		6556		6557	
6558		6559		6560	
6561		6562		6563	
6564		6565		6566	
6567		6568		6569	
6570		6571		6572	
6573		6574		6575	
6576		6577		6578	
6579		6580		6581	
6582		6583		6584	
6585		6586		6587	
6588		6589		6590	
6591		6592		6593	
6594		6595		6596	
6597		6598		6599	
6600		6601		6602	
6603		6604		6605	
6606		6607		6608	
6609		6610		6611	
6612		6613		6614	

Specification Requirement Sheet must contain Codes and applicable Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX G - QUALITY CONFORMANCE SEQUENCE TABLE

(see 1 .2.10)

GROUP A TEST TITLE ADDED		GROUP A PRECEDING INSPECTION TEST	
CODE	VALUE	CODE	VALUE
6810		6811	
6812		6813	
6814		6815	
6816		6817	
6818		6819	
6820		6821	
6822		6823	
6824		6825	
6826		6827	
6828		6829	
6830		6831	
6832		6833	
6834		6835	
6836		6837	
6838		6839	

Specification Requirement Sheet must contain Codes and applicable Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX G - QUALITY CONFORMANCE SEQUENCE TABLE

(see 1.2.10)

GROUP B TEST TITLE ADDED		GROUP B PRECEDING INSPECTION TEST	
CODE	VALUE	CODE	VALUE
6840		6841	
6842		6843	
6844		6845	
6846		6847	
6848		6849	
6850		6851	
6852		6853	
6854		6855	
6856		6857	
6858		6859	
6860		6861	
6862		6863	
6864		6865	
6866		6867	
6868		6869	

Specification Requirement Sheet must contain Codes and applicable Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX G - QUALITY CONFORMANCE SEQUENCE TABLE

(see 1.2.10)

GROUP C TEST TITLE ADDED		GROUP C PRECEDING INSPECTION TEST	
CODE	VALUE	CODE	VALUE
6950		6951	
6952		6953	
6954		6955	
6956		6957	
6958		6959	
6960		6961	
6962		6963	
6964		6965	
6966		6967	
6968		6969	
6970		6971	
6972		6973	
6974		6975	
6976		6977	
6978		6979	

Specification Requirement Sheet must contain Codes and applicable Values.

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX H - DELETED TEST TABLE
(When specific tests are not required)

(see 1.2.10)

GROUP A DELETED TEST TITLE		GROUP B DELETED TEST TITLE		GROUP C DELETED TEST TITLE	
CODE	VALUE	CODE	VALUE	CODE	VALUE
6875		6890		6905	
6876		6891		6906	
6877		6892		6907	
6878		6893		6908	
6879		6894		6909	
6880		6895		6910	
6881		6896		6911	
6882		6897		6912	
6883		6898		6913	
6884		6899		6914	
6885		6900		6915	
6886		6901		6916	
6887		6902		6917	
6888		6903		6918	
6889		6904		6919	

Specification Requirement Sheet must contain applicable Codes and Values.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX J - DELETED FIRST ARTICLE TESTS

(see 1.2.10)

FIRST ARTICLE DELETED TEST TITLE	
CODE	VALUE
6980	
6981	
6982	
6983	
6984	
6985	
6986	
6987	
6988	
6989	

Specification Requirement Sheet must contain Codes and applicable Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX S - SOURCE TABULATION TABLE

(see 1.2.36)

CODE	DASH NO.	CODE	FSCM	CODE	MFG. PART NO.
9051		9151		9451	
		9152		9452	
		9153		9453	
		9154		9454	
		9155		9455	
		9156		9456	
9052		9157		9457	
		9158		9458	
		9159		9459	
		9160		9460	
		9161		9461	
		9162		9462	
9053		9163		9463	
		9164		9464	
		9165		9465	
		9166		9466	
		9167		9467	
		9168		9468	
9054		9169		9469	
		9170		9470	
		9171		9471	
		9172		9472	
		9173		9473	
		9174		9474	
9055		9175		9475	
		9176		9476	
		9177		9477	
		9178		9478	
		9179		9479	
		9180		9480	

CODE	DASH NO.	CODE	FSCM	CODE	MFG. PART NO.
9056		9181		9481	
		9182		9482	
		9183		9483	
		9184		9484	
		9185		9485	
		9186		9486	
9057		9187		9487	
		9188		9488	
		9189		9489	
		9190		9490	
		9191		9491	
		9192		9492	
9058		9193		9493	
		9194		9494	
		9195		9495	
		9196		9496	
		9197		9497	
		9198		9498	
9059		9199		9499	
		9200		9500	
		9201		9501	
		9202		9502	
		9203		9503	
		9204		9504	
9060		9205		9505	
		9206		9506	
		9207		9507	
		9208		9508	
		9209		9509	
		9210		9510	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX S - SOURCE TABULATION TABLE

(see 1.2.36)

CODE	DASH NO.	CODE	FSCM	CODE	MFG. PART NO.
9061		9211		9511	
		9212		9512	
		9213		9513	
		9214		9514	
		9215		9515	
		9216		9516	
9062		9217		9517	
		9218		9518	
		9219		9519	
		9220		9520	
		9221		9521	
		9222		9522	
9063		9223		9523	
		9224		9524	
		9225		9525	
		9226		9526	
		9227		9527	
		9228		9528	
9064		9229		9529	
		9230		9530	
		9231		9531	
		9232		9532	
		9233		9533	
		9234		9534	
9065		9235		9535	
		9236		9536	
		9237		9537	
		9238		9538	
		9239		9539	
		9240		9540	

CODE	DASH NO.	CODE	FSCM	CODE	MFG. PART NO.
9066		9241		9541	
		9242		9542	
		9243		9543	
		9244		9544	
		9245		9545	
		9246		9546	
9067		9247		9547	
		9248		9548	
		9249		9549	
		9250		9550	
		9251		9551	
		9252		9552	
9068		9253		9553	
		9254		9554	
		9255		9555	
		9256		9556	
		9257		9557	
		9258		9558	
9069		9259		9559	
		9260		9560	
		9261		9561	
		9262		9562	
		9263		9563	
		9264		9564	
9070		9265		9565	
		9266		9566	
		9267		9567	
		9268		9568	
		9269		9569	
		9270		9570	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX S - SOURCE TABULATION TABLE

(see 1.2.36)

CODE	DASH NO.	CODE	FSCM	CODE	MFG. PART NO.
9071		9271		9571	
		9272		9572	
		9273		9573	
		9274		9574	
		9275		9575	
		9276		9576	
9072		9277		9577	
		9278		9578	
		9279		9579	
		9280		9580	
		9281		9581	
		9282		9582	
9073		9283		9583	
		9284		9584	
		9285		9585	
		9286		9586	
		9287		9587	
		9288		9588	
9074		9289		9589	
		9290		9590	
		9291		9591	
		9292		9592	
		9293		9593	
		9294		9594	
9075		9295		9595	
		9296		9596	
		9297		9597	
		9298		9598	
		9299		9599	
		9300		9600	

CODE	DASH NO.	CODE	FSCM	CODE	MFG. PART NO.
9076		9301		9601	
		9302		9602	
		9303		9603	
		9304		9604	
		9305		9605	
		9306		9606	
9077		9307		9607	
		9308		9608	
		9309		9609	
		9310		9610	
		9311		9611	
		9312		9612	
9078		9313		9613	
		9314		9614	
		9315		9615	
		9316		9616	
		9317		9617	
		9318		9618	
9079		9319		9619	
		9320		9620	
		9321		9621	
		9322		9622	
		9323		9623	
		9324		9624	
9080		9325		9625	
		9326		9626	
		9327		9627	
		9328		9628	
		9329		9629	
		9330		9630	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX S - SOURCE TABULATION TABLE

(see 1.2.36)

CODE	DASH NO	CODE	FSCM	CODE	MFG. PART NO.
9081		9331		9631	
		9332		9632	
		9333		9633	
		9334		9634	
		9335		9635	
		9336		9636	
9082		9337		9637	
		9338		9638	
		9339		9639	
		9340		9640	
		9341		9641	
		9342		9642	
9083		9343		9643	
		9344		9644	
		9345		9645	
		9346		9646	
		9347		9647	
		9348		9648	
9084		9349		9649	
		9350		9650	
		9351		9651	
		9352		9652	
		9353		9653	
		9354		9654	
9085		9355		9655	
		9356		9656	
		9357		9657	
		9358		9658	
		9359		9659	
		9360		9660	

CODE	DASH NO.	CODE	FSCM	CODE	MFG. PART NO.
9086		9361		9661	
		9362		9662	
		9363		9663	
		9364		9664	
		9365		9665	
		9366		9666	
9087		9367		9667	
		9368		9668	
		9369		9669	
		9370		9670	
		9371		9671	
		9372		9672	
9088		9373		9673	
		9374		9674	
		9375		9675	
		9376		9676	
		9377		9677	
		9378		9678	
9089		9379		9679	
		9380		9680	
		9381		9681	
		9382		9682	
		9383		9683	
		9384		9684	
9090		9385		9685	
		9386		9686	
		9387		9687	
		9388		9688	
		9389		9689	
		9390		9690	

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

(see 1.2.36)

APPENDIX S - SOURCE TABULATION TABLE

CODE	DASH NO.	CODE	FSCM	CODE	MFG. PART NO.
9091		9391		9691	
		9392		9692	
		9393		9693	
		9394		9694	
		9395		9695	
		9396		9696	
9092		9397		9697	
		9398		9698	
		9399		9699	
		9400		9700	
		9401		9701	
		9402		9702	
9093		9403		9703	
		9404		9704	
		9405		9705	
		9406		9706	
		9407		9707	
		9408		9708	
9094		9409		9709	
		9410		9710	
		9411		9711	
		9412		9712	
		9413		9713	
		9414		9714	
9095		9415		9715	
		9416		9716	
		9417		9717	
		9418		9718	
		9419		9719	
		9420		9720	

CODE	DASH NO.	CODE	FSCM	CODE	MFG. PART NO.
9096		9421		9721	
		9422		9722	
		9423		9723	
		9424		9724	
		9425		9725	
		9426		9726	
9097		9427		9727	
		9428		9728	
		9429		9729	
		9430		9730	
		9431		9731	
		9432		9732	
9098		9433		9733	
		9434		9734	
		9435		9735	
		9436		9736	
		9437		9737	
		9438		9738	
9099		9439		9739	
		9440		9740	
		9441		9741	
		9442		9742	
		9443		9743	
		9444		9744	
9100		9445		9745	
		9446		9746	
		9447		9747	
		9448		9748	
		9449		9749	
		9450		9750	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 1.3

CONFIGURATION AND DRAWINGS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 1.3.1 FIGURE TITLES VS FIGURE NUMBERS

	Figure Number
Sprocket Body Styles	115-91-1 thru-4
Sprocket Hub Styles	115-02-1 thru-3
Sprocket Bore Styles	115-03-1 thru -3
Sprocket Tooth Styles	115-04-1 and -2
Sprocket Multiple Width Styles	115-05-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 1.3.2 LEGEND INDEX

AA	Diameter, Outside
AB	Diameter, Pitch
AC	Diameter
AD	Diameter, Over Pins
AE	Diameter, Chain Clearance Circle
AF	Pitch, Chain
AG	Angle, Tooth
AH	Angle, Gap
AJ	Width
AK	Thickness
AL	Radius
AM	Radius
AN	Width
AP	Radius
AQ	Width
AR	Radius
AS	Width
AT	Width
AU	Depth
AV	Width
AW	Width
AX	Diameter

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 1.3.2 LEGEND INDEX (CONT.)

AY	Taper Lock Screw Threads
AZ	Diameter
BA	Radius, Topping Curve
BB	Radius
BC	Setscrew Threads
BD	Length Threads
BE	Bore Threads
BF	Diameter, Gauge Pin
BG	Height
BH	Diameter, To Base Working Face
BJ	Diameter, Maximum Guide Groove
BK	Radius
BL	Radius
BM	Radius
BN	Diameter, Hole Circle
BP	Diameter, Lightening Holes
BQ	Radius
BR	Radius
BS	Diameter, Roller
BT	Diameter
BU	Diameter

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 1.3.2 LEGEND INDEX (CONT.)

BV	Radius
BW	Diameter, Bolt Holes
BX	Radius
BY	Length
BZ	Diameter
CA	Thickness
CB	Length
cc	Diameter
CD	Span
CE	Span
CF	Span
CG	Span
CH	Width
CJ	Radius
CK	Radius
CL	Depth
CM	Width
CN	Diameter
CP	Diameter
CQ	Diameter
CR	Diameter

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 1.3.2 **LEGEND** INDEX (CONT.)

CS	Diameter
CT	Length
CU	Length
CV	Length
CW	Length
CX	Radius
CY	Angle
CZ	Radius
DA	Length

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

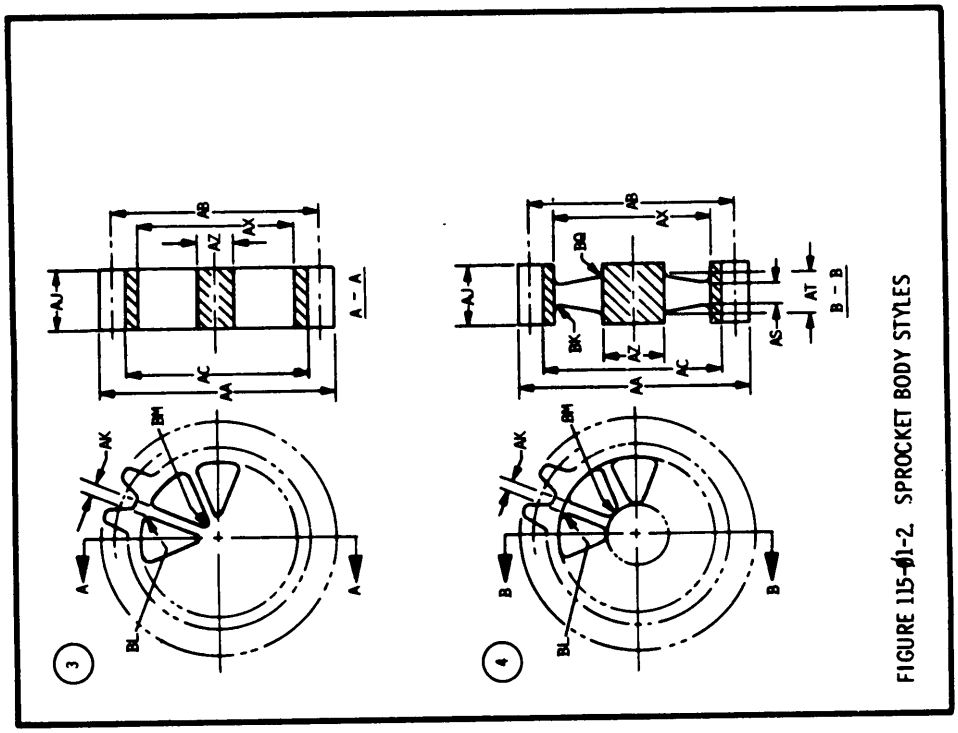


FIGURE 115-1-2. SPROCKET BODY STYLES

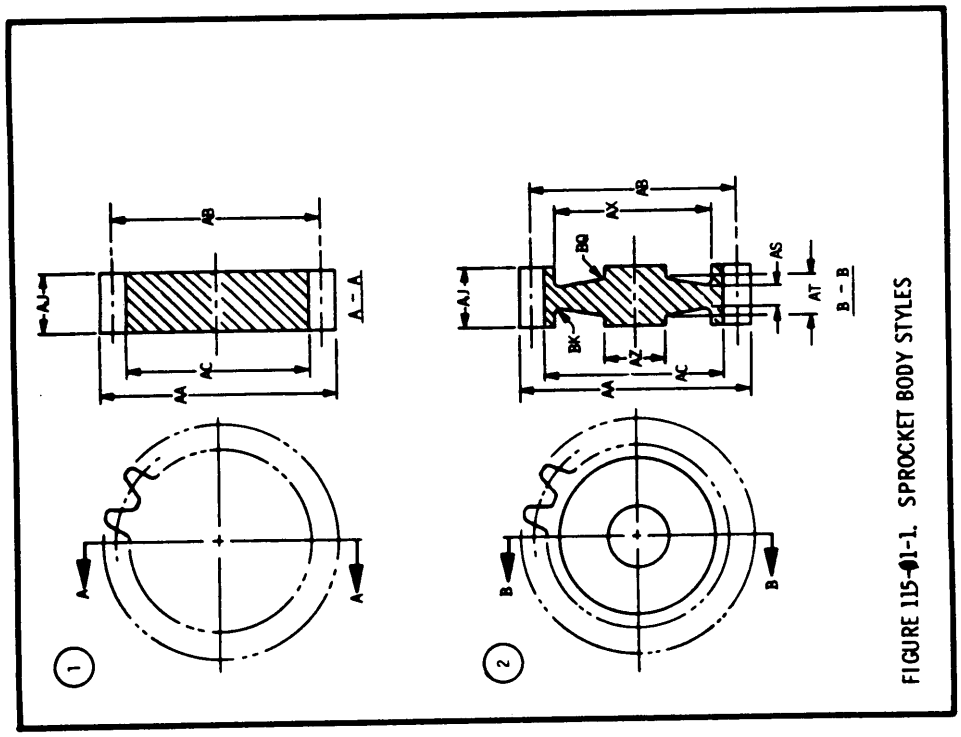


FIGURE 115-1-1. SPROCKET BODY STYLES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

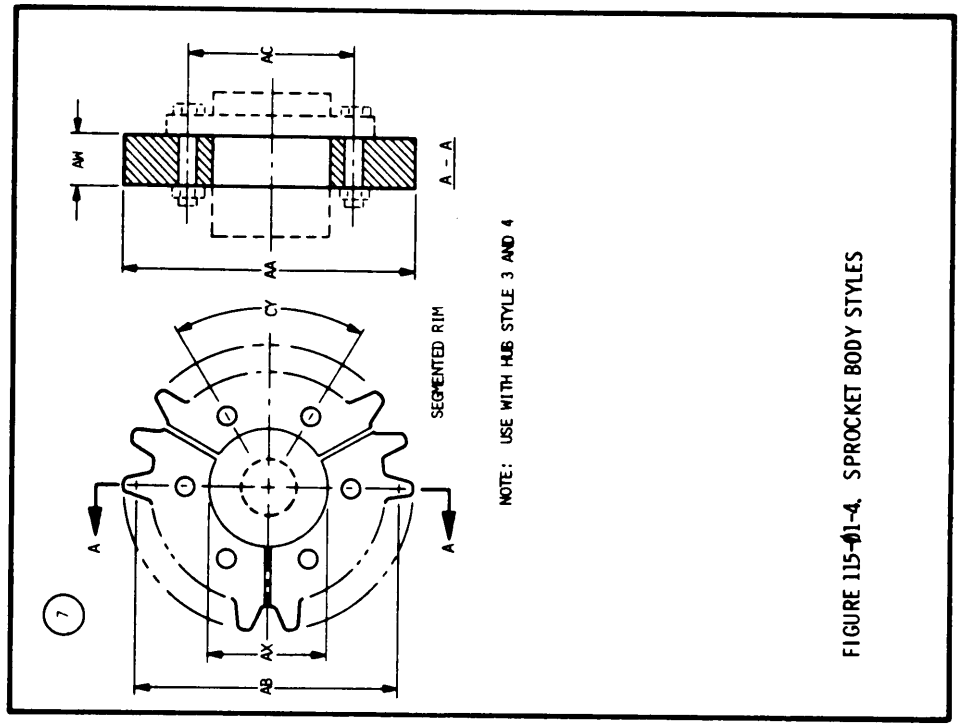


FIGURE 115-41-4. SPROCKET BODY STYLES

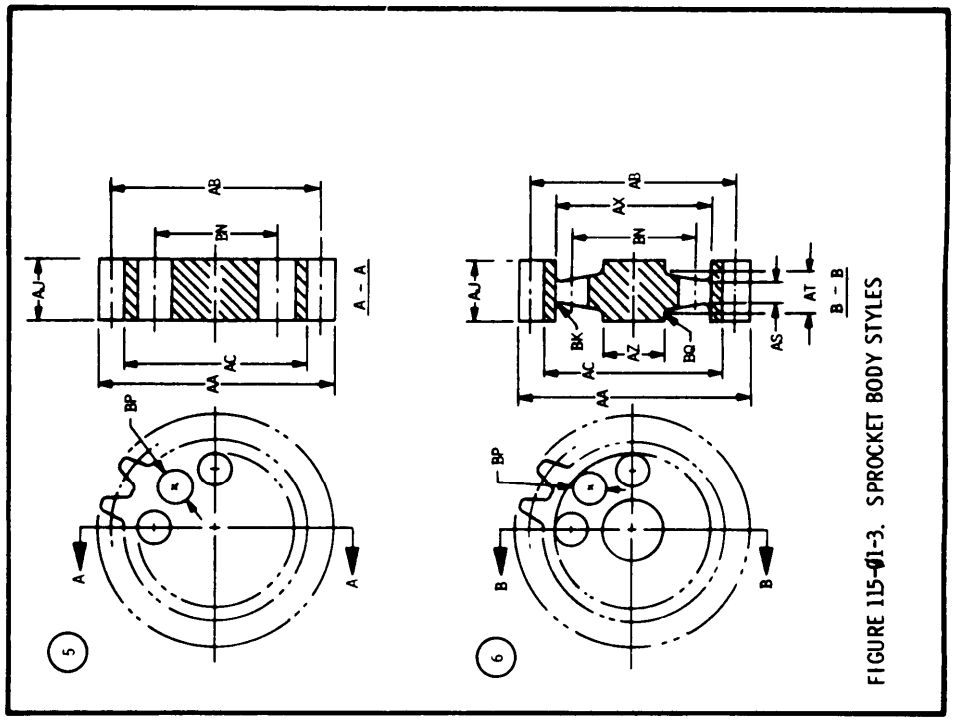


FIGURE 115-41-3. SPROCKET BODY STYLES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

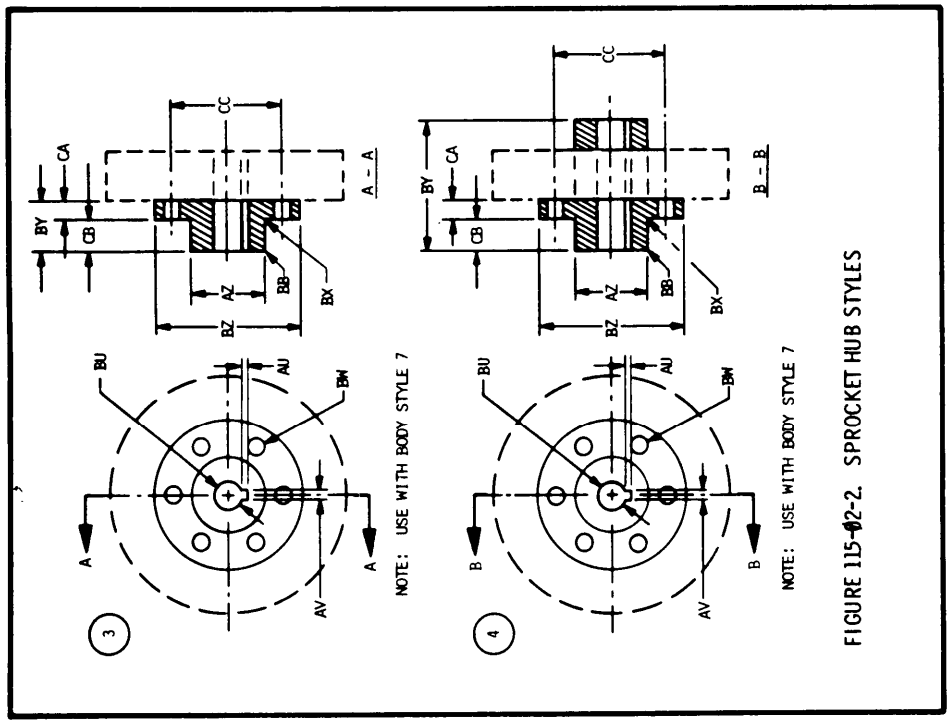


FIGURE 115-02-2. SPROCKET HUB STYLES

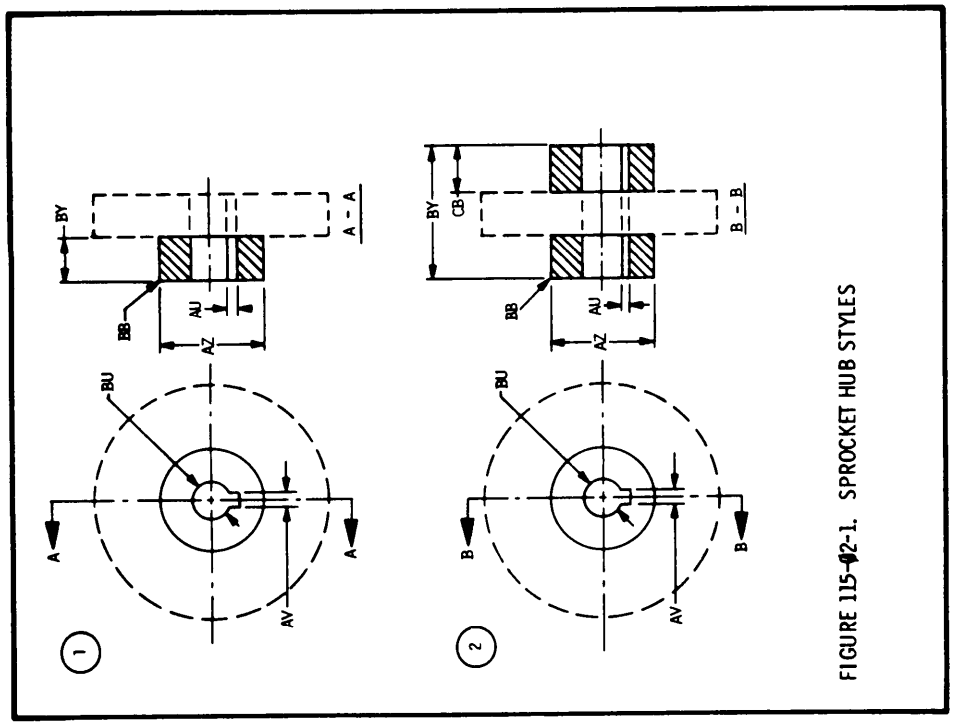


FIGURE 115-02-1. SPROCKET HUB STYLES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS SPACE INTENTIONALLY
LEFT BLANK

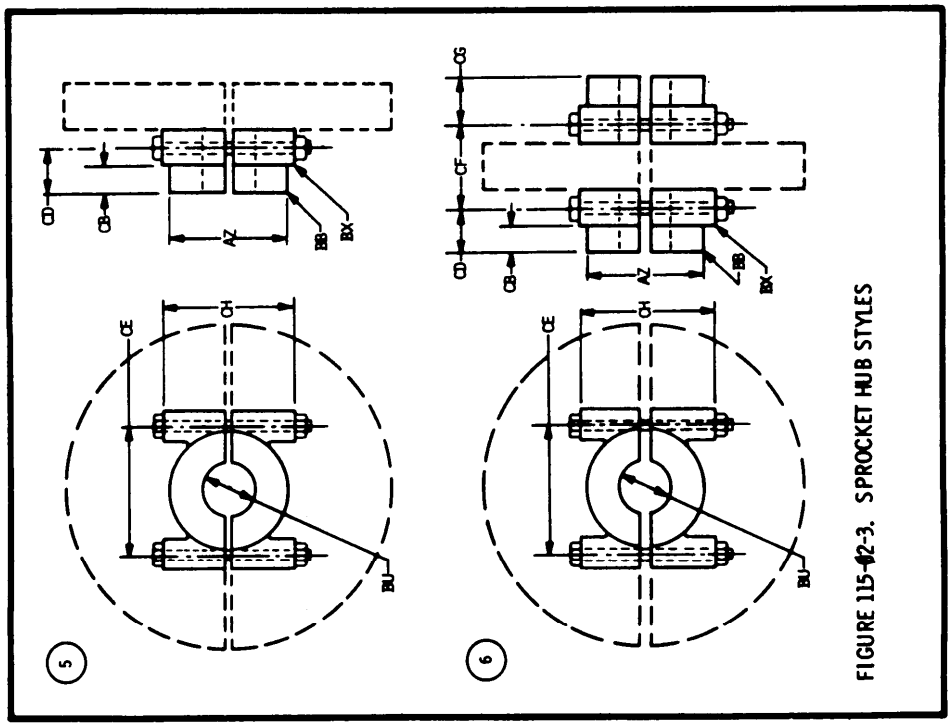


FIGURE 115-42-3. SPROCKET HUB STYLES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

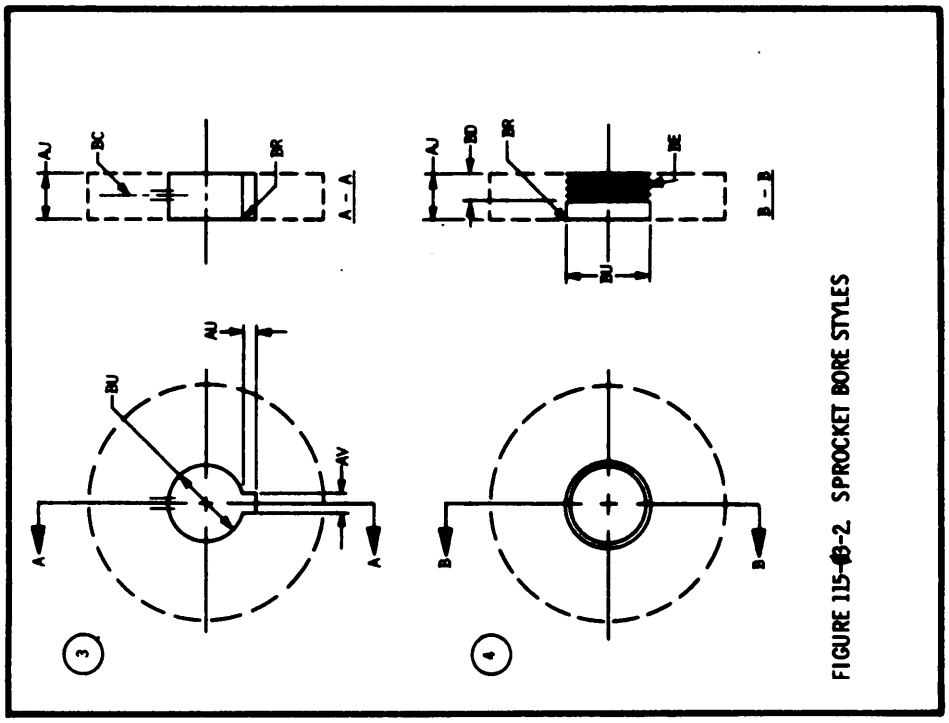


FIGURE 115-40-2 SPROCKET BORE STYLES

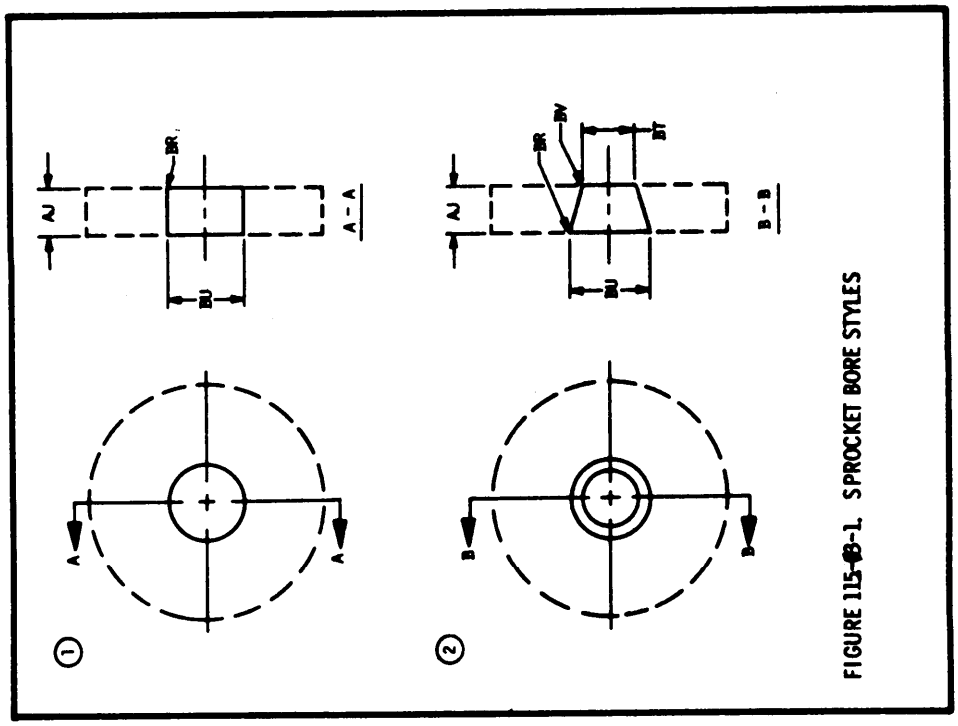


FIGURE 115-40-1 SPROCKET BORE STYLES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS SPACE INTENTIONALLY
LEFT BLANK

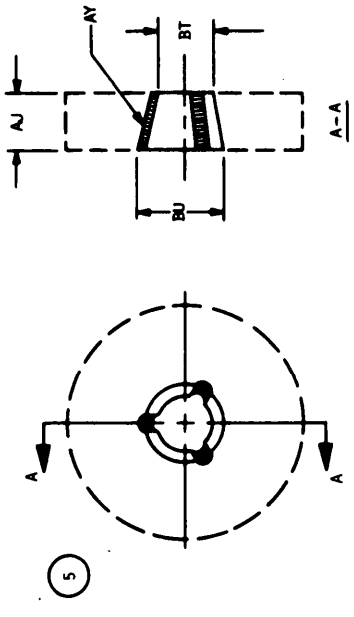


FIGURE 115-13-3. SPROCKET BORE STYLES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

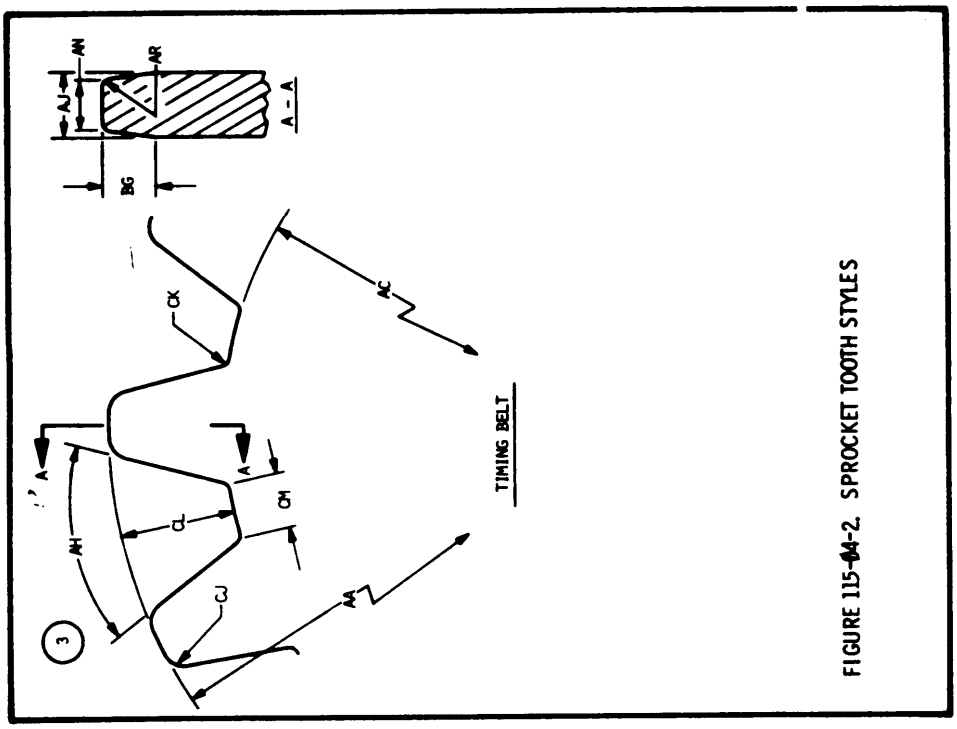


FIGURE 115-44-2 SPROCKET TOOTH STYLES

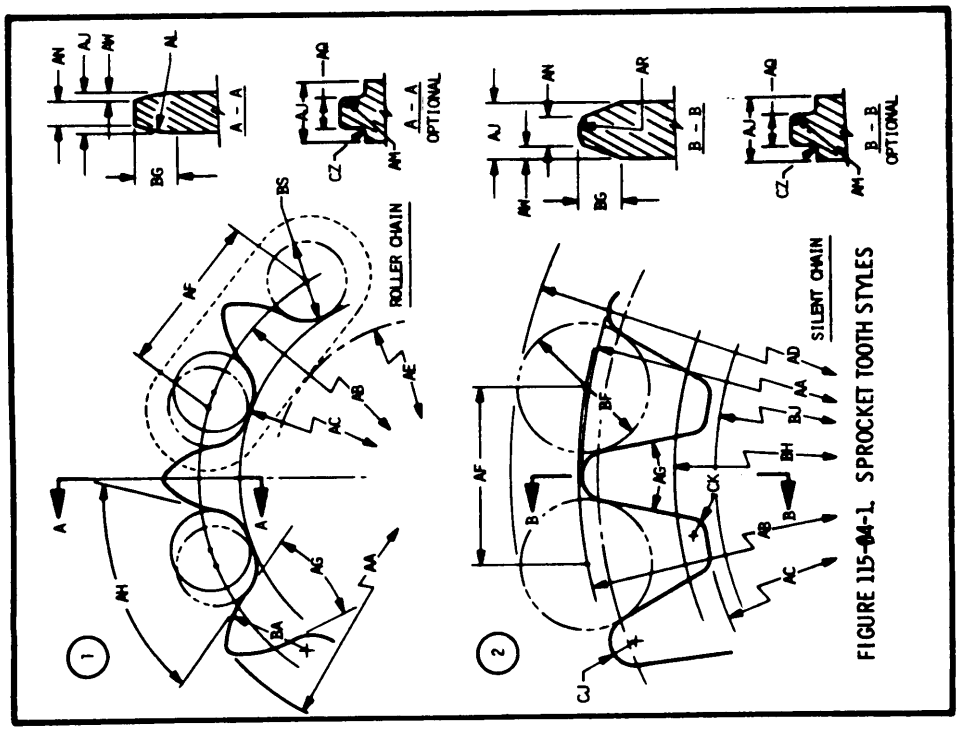


FIGURE 115-44-1 SPROCKET TOOTH STYLES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS SPACE INTENTIONALLY
LEFT BLANK

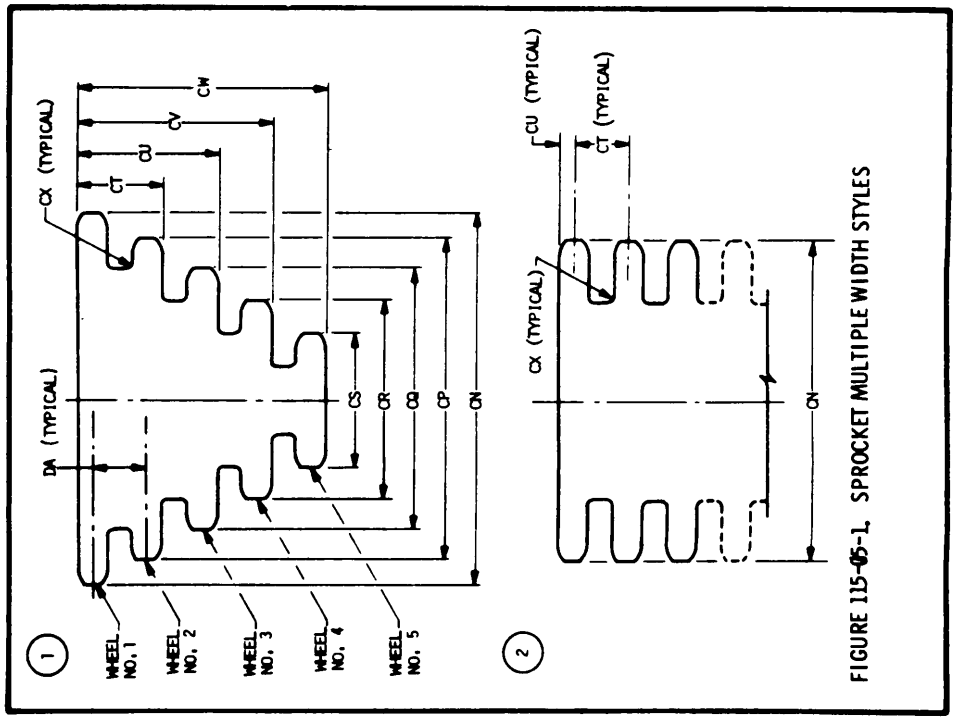


FIGURE 115-1. SPROCKET MULTIPLE WIDTH STYLES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET

TITLE CODE (1 2 3 4 5 6) SERIAL NO. (7 8 9 10 11 12)

MICROFILM REQUIRED: YES NO

REQUESTERS NAME

MAILING ADDRESS

REVISION TO AEDPS DOCUME::T NO.

PHONE NO. A C

SPROCKETS CHARACTERISTIC NAME	CHAR CODE 13 14 15 16	VALUE 20 25 30 35 40 45 50 55 60 65 70 75 80
*DATE	1 0 0 3	
*FSCM/CODE IDENT OF REQUESTER	1 0 0 4	
*PRIME CONTRACT NUMBER	1 0 0 5	
*APPLICABLE GENERAL SPECIFICATION FROM SPECIFICATION TITLE INDEX	1 0 0 6	
*ITEM APPLICATION	1 0 0 8	
*DRAWING FIGURE NUMBER	1 0 0 9	
*COMPLETE THE REQUIRED CODES FROM APPENDIX "A" AND OTHER APPENDICES AND CODES AS REQUIRED TO GENERATE THE DESIRED DOCUMENT	USE BLANK SRS	
*SOURCE - APPROPRIATE CODE(S)	USE BLANK SRS	
*FIRST ARTICLE INSPECTION - SELECT THE APPROPRIATE CODE		
*GROUP A INSPECTION - SELECT THE APPROPRIATE CODE		
*GROUP B INSPECTION - SELECT THE APPROPRIATE CODE		
*TEST METHODS - SELECT 1560 OR 1561		

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

SPECIFICATION REQUIREMENT SHEET

TITLE CODE 1 2 3 4 5 6

SERIAL NO. 7 8 9 10 11 12

MICROFILM REQUIRED: YES ☐ NO ☐

REQUESTERS NAME _____

MAILING ADDRESS _____

REVISION TO AEDPS DOCUMENT NO. ☐☐☐☐☐☐☐☐☐☐☐☐☐☐

PHONE NO. A/C _____

CHARACTERISTIC NAME	CHAR CODE 13 14 15 16	VALUE 20 25 30 35 40 45 50 55 60 65 70 75 80

Source: https://assist.dla.mil -- Downloaded: 2026-04-26T07:24Z
Check the source to verify that this is the current version before use.

TITLE CODE

1	2	3	4	5	6

SERIAL NO.

7	8	9	10	11	12

SPECIFICATION REQUIREMENT SHEET
TABULATION TABLE

DASH NUMBER	CHARACTERISTIC CODE COL. 14–16	TABULATION CODE AND VALUES COL. 17—	CHARACTERISTIC CODE COL. 13–16	TABULATION CODE AND VALUES COL. 17—	CHARACTERISTIC CODE COL. 13–16	TABULATION CODE AND VALUES COL. 17—	CHARACTERISTIC CODE COL. 13–16	TABULATION CODE AND VALUES COL. 17—	CHARACTERISTIC CODE COL. 13–16	TABULATION CODE AND VALUES COL. 17—	CHARACTERISTIC CODE COL. 13–16	TABULATION CODE AND VALUES COL. 17—	CHARACTERISTIC CODE COL. 13–16	TABULATION CODE AND VALUES COL. 17—	CHARACTERISTIC CODE COL. 13–16	TABULATION CODE AND VALUES COL. 17—	CHARACTERISTIC CODE COL. 13–16	TABULATION CODE AND VALUES COL. 17—	CHARACTERISTIC CODE COL. 13–16	TABULATION CODE AND VALUES COL. 17—	CHARACTERISTIC CODE COL. 13–16	TABULATION CODE AND VALUES COL. 17—
	8Ø00		8Ø51		8102		8153		8204		8255		8306		8357		8408		8459			
Ø1	8Ø01		8Ø52		8103		8154		8205		8256		8307		8358		8409		846Ø			
Ø2	8Ø02		8Ø53		8104		8155		8206		8257		8308		8359		841Ø		8461			
Ø3	8Ø03		8Ø54		8105		8156		8207		8258		8309		836Ø		8411		8462			
Ø4	8Ø04		8Ø55		8106		8157		8208		8259		831Ø		8361		8412		8463			
Ø5	8Ø05		8Ø56		8107		8158		8209		826Ø		8311		8362		8413		8464			
Ø6	8Ø06		8Ø57		8108		8159		821Ø		8261		8312		8363		8414		8465			
Ø7	8Ø07		8Ø58		8109		816Ø		8211		8262		8313		8364		8415		8466			
Ø8	8Ø08		8Ø59		811Ø		8161		8212		8263		8314		8365		8416		8467			
Ø9	8Ø09		8Ø6Ø		8111		8162		8213		8264		8315		8366		8417		8468			
1Ø	8Ø1Ø		8Ø61		8112		8163		8214		8265		8316		8367		8418		8469			
11	8Ø11		8Ø62		8113		8164		8215		8266		8317		8368		8419		847Ø			
12	8Ø12		8Ø63		8114		8165		8216		8267		8318		8369		842Ø		8471			
13	8Ø13		8Ø64		8115		8166		8217		8268		8319		837Ø		8421		8472			
14	8Ø14		8Ø65		8116		8167		8218		8269		832Ø		8371		8422		8473			
15	8Ø15		8Ø66		8117		8168		8219		827Ø		8321		8372		8423		8474			
16	8Ø16		8Ø67		8118		8169		822Ø		8271		8322		8373		8424		8475			
17	8Ø17		8Ø68		8119		817Ø		8221		8272		8323		8374		8425		8476			
18	8Ø18		8Ø69		812Ø		8171		8222		8273		8324		8375		8426		8477			
19	8Ø19		8Ø7Ø		8121		8172		8223		8274		8325		8376		8427		8478			
2Ø	8Ø2Ø		8Ø71		8122		8173		8224		8275		8326		8377		8428		8479			
21	8Ø21		8Ø72		8123		8174		8225		8276		8327		8378		8429		848Ø			
22	8Ø22		8Ø73		8124		8175		8226		8277		8328		8379		843Ø		8481			
23	8Ø23		8Ø74		8125		8176		8227		8278		8329		838Ø		8431		8482			
24	8Ø24		8Ø75		8126		8177		8228		8279		8330		8381		8432		8483			
25	8Ø25		8Ø76		8127		8178		8229		828Ø		8331		8382		8433		8484			
26	8Ø26		8Ø77		8128		8179		823Ø		8281		8332		8383		8434		8485			
27	8Ø27		8Ø78		8129		818Ø		8231		8282		8333		8384		8435		8486			
28	8Ø28		8Ø79		813Ø		8181		8232		8283		8334		8385		8436		8487			
29	8Ø29		8Ø8Ø		8131		8182		8233		8284		8335		8386		8437		8488			
3Ø	8Ø3Ø		8Ø81		8132		8183		8234		8285		8336		8387		8438		8489			
31	8Ø31		8Ø82		8133		8184		8235		8286		8337		8388		8439		849Ø			
32	8Ø32		8Ø83		8134		8185		8236		8287		8338		8389		844Ø		8491			
33	8Ø33		8Ø84		8135		8186		8237		8288		8339		839Ø		8441		8492			
34	8Ø34		8Ø85		8136		8187		8238		8289		834Ø		8391		8442		8493			
35	8Ø35		8Ø86		8137		8188		8239		829Ø		8341		8392		8443		8494			
36	8Ø36		8Ø87		8138		8189		824Ø		8291		8342		8393		8444		8495			
37	8Ø37		8Ø88		8139		819Ø		8241		8292		8343		8394		8445		8496			
38	8Ø38		8Ø89		814Ø		8191		8242		8293		8344		8395		8446		8497			
39	8Ø39		8Ø9Ø		8141		8192		8243		8294		8345		8396		8447		8498			
4Ø	8Ø4Ø		8Ø91		8142		8193		8244		8295		8346		8397		8448		8499			
41	8Ø41		8Ø92		8143		8194		8245		8296		8347		8398		8449		85ØØ			
42	8Ø42		8Ø93		8144		8195		8246		8297		8348		8399		845Ø		85Ø1			
43	8Ø43		8Ø94		8145		8196		8247		8298		8349		84ØØ		8451		85Ø2			
44	8Ø44		8Ø95		8146		8197		8248		8299		835Ø		84Ø1		8452		85Ø3			
45	8Ø45		8Ø96		8147		8198		8249		83ØØ		8351		84Ø2		8453		85Ø4			
46	8Ø46		8Ø97		8148		8199		825Ø		8301		8352		84Ø3		8454		85Ø5			
47	8Ø47		8Ø98		8149		82ØØ		8251		8302		8353		84Ø4		8455		85Ø6			
48	8Ø48		8Ø99		815Ø		8201		8252		8303		8354		84Ø5		8456		85Ø7			
49	8Ø49		81ØØ		8151		8202		8253		8304		8355		84Ø6		8457		85Ø8			
5Ø	8Ø5Ø		8101		8152		8203		8254		8305		8356		84Ø7		8458		85Ø9			

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
MIL-STD-35-51(MI), AEDPS, Sprockets

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Missile Command
ATTN: AMSMI-RCS
Redstone Arsenal, AL 35809

*U.S. GOVERNMENT PRINTING OFFICE: 1974-- 713-167/1931

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.