MIL-STD-35-72(MI)

22 MAY 1974

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

ACTUATORS, ELECTROMECHANICAL, ROTARY

FSC-EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL COMMAND
WASHINGTON, D.C. 20315

Automated Engineering
Document Preparation System
MIL-STD-35-72(MI)

1. This Military Standard is approved by the U.S. Army Materiel Command, Department of the Army, and is mandatory for use by all its activities. All other military activities are required to employ this Standard where suitable.

2. Recommended corrections, additions, or deletions should be addressed to Commander, U.S. Army Missile Command, ATTN: AMSMI-RCS, Redstone Arsenal, Alabama 35809.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of MIL-STD-35-72(MI) is to facilitate the preparation of Military Specification Exceptions for Actuators, Electromechanical, Rotary.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the basic MIL-STD-35, along with MIL-STD-35-1 for Materials, and MIL-STD-35-2 for Finishes.

3. It is important that the Procedure described in the basic document (MIL-STD-35) be followed explicitly in order for the computer to produce a document suitable for competitive procurement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS

SECTION	TITLE	PAGE
1.0	Actuators, Electromechanical, Rotary	1
1.1	Specification Title Index	3
1.2	Specification Requirements Instructions	5
1.2.1	General	5
1.2.1.1	Tabulation Table	6
1.2.2	Effectivity of Data	13
1.2.3	Writing Methodology	13
1.2.4	Characteristic Codes and Characteristic Value Codes	14
1.2.5	Actuator Characteristics	15
1.2.6	Dimensions and Drawings	16
1.2.7	Materials and Finishes	16
1.2.8	Additional Requirements, Marking, Packaging, Quality Assurance, and Notes	17
1.2.9	Applicable Documents	18
1.2.10	Quality Assurance and Conformance	20
1.2.11	Detailed Requirements	20
1.2.12	Date	21
1.2.13	FSCM/Code Ident of Requester	21
1.2.14	Prime Contract Number	21
1.2.15	Applicable General Specification	21
1.2.16	Generated Document	21

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS (CONT.)

SECTION	TITLE	PAGE
1.2.17	Item Application	22
1.2.18	Drawing Figure Number	22
1.2.19	Dimensions	22
1.2020	Design Characteristics	22
1.2.20.1	Starting Current	22
1.2.20.2	Operating Current	22
1.2.20.3	Acceleration	23
1.2.20.4	Operating Speed With Load	23
1.2.20.5	Operating Speed Without Load	23
1.2.20.6	Breakaway Torque	23
1.2.20.7	Overtravel	24
1.2.21	Actuator Materials	24
1.2.22	Actuator Finishes	25
1.2.23	Travel	27
1.2.24	Operating Torque	27
1.2.25	Stall Torque	28
1.2.26	Holding Torque	28
1.2.27	Rated Load	28
1.2.28	Maximum Operating Load	28
1.2.29	Stall Load	28
1.2.30	Output Shaft Revolutions	28

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS (CONT.)

SECTION	TITLE	PAGE
1.2.31	Backlash	29
1.2.32	coast	29
1.2.33	Repeatabi1ity	29
1.2.34	Travel Limit Stops	29
1.2.35	Brakes	30
1.2.36	Operating Speed Adjustments	31
1.2.37	Reversibility	31
1.2.38	Position Transmitters	31
1.2.39	Thermal Protection	32
1.2.40	Duty Cycle	32
1.2.41	Over-Riding Loads	32
1.2.42	Rated Life	32
1.2.43	Clutch	33
1.2.44	Motor-to-Output Shaft Gear Ratio	33
1.2.45	Output Shaft Side Loading	33
1.2.46	Motor	33
1.2.47	Efficiency	34
1.2.48	Power Consumption	34
1.2.49	Input Power	34
1.2.50	Electrical Connectors	35
1.2.51	Electrical Wiring	35

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS (CONT.)

SECTION	TITLE	PAGE
1.2.52	Electrical Connections	35
1.2.53	Weight	35
1.2.54	Locking of Parts	35
1.2.55	Housing	36
1.2.56	Output Shaft	36
1.2.57	Lubrication	36
1.2.58	Retaining Rings	37
1.2.59	Spring Pins	37
1.2.60	Operating Temperature	37
1.2.61	Storage Temperature	37
1.2.62	Operating Altitude Range	38
1.2.63	Nameplate and Product Marking	38
1.2.64	Wiring Diagram Nameplate	38
1.2.65	Motor Data Nameplate	38
1.2.66	Lubrication Data Nameplate	39
1.2.67	Interference (Conducted)	39
1.2.67.1	Test Methods	39
1.2.67.2	Requirements	39
1.2.68	Interference (Radiated)	40
1.2.68.1	Test Methods	40
1.2.68.2	Requirements	40

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS (CONT.)

SECTION	TITLE	PAGE
1.2.69	Electrical and Environmental Test Methods and Requirements	41
1.2.69.1	Test Methods	41
1.2.69.2	Requirements	42
1.2.70	Workmanship	42
1.2.71	Sources	43
1.2.72	Material and Process Substitution	44
1.2.73	Supersession Data	44
1.2.74	Test Data and Test Methods	44
1.2.75	Specification Requirements, Appendices and SRS	45
1.2.76	Specification Requirements Sheet (SRS) Form	45
1.2.77	Searching for Existing Documents	46
1.2.77.1	General Requirements	46
1.2.77.2	Instructions	46
Specification Requirements		47-115
Quality Assurance Requirements		117-124
Special Requirements		125, 126
Table I.	Actuators Materials Table	127
Table II.	Actuator Finishes Table	128
Appendices		129-146

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS (CONT.)

SECTION	TITLE	PAGE
1.3	Configuration and Drawings	147
1.3.1	Figure Titles vs Figure Numbers	149
1.3.2	Legend Index	151-153
	Figures 250-01-1 thru 250-02-1	155-163
	Reproducible Foldout Specification Requirement Sheet (SRS) Forms	165, 167
	Reproducible Foldout Specification Requirement Sheet Tabulation Table	169

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 1.0

ACTUATORS, ELECTROMECHANICAL, ROTARY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 1.1

SPECIFICATION TITLE INDEX

Specification Title Code*	Specification Title	Applicable Specification
250001	Actuators and Actuating Systems, Aircraft, Electromechanical	MIL-A-8064
250002	Actuator, Electromechanical, Rotary	MIL-A-19401

*NOTE - The six (6) digits of this title code are placed in the first six (6) digits of the simplified SRS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT B LANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 1.2

SPECIFICATION REQUIREMENTS INSTRUCTIONS

1.2.1 General

The purpose of this instruction is to establish the procedures to be followed, and the format to be used, for submission of requirements to obtain a computer generated procurement document.

Requirement definition is through the use of a Specification Requirement Sheet (SRS). Requirements are shown in the Specification Requirements List (pages 47 through 115). The characteristic codes and values for these requirements are entered on the SRS (pages 165 and 167). Besides assisting the user in preparing his requirements for coverage by the Automated Engineering Document Preparation System (AEDPS), the SRS is used in formulating instructions to the computer.

Certain characteristic codes are mandatory to the preparation of a document by the computer. The designation for mandatory characteristic codes will be an asterisk (*) before the characteristic name. If the asterisk is at the far left edge, it is fully mandatory to get a satisfactory document. For example, Codes 1003 through 1009 must be completed. If the asterisk is by an indentured item, it is mandatory only for the item above that is not indentured to the same extent. For example, if Code 1600 is desired, Code 1602 must also be completed. Most characteristic codes will generated paragraphs. Other characteristic codes will be required for comparison purposes only or for inclusion in separate characteristic tables.

The document generated by the AEDPS automatically refers to the referenced specification for established requirements and mandatory tests. If added tests or changes to existing tests are required, the requirements for these tests must be specified. This can be accomplished by selecting the proper codes from the Specification Requirements List and completing the required Appendix.

Reproducible copies of the SRS are located immediately following the Figures in each Section. They are to be locally reproduced and used for submittal of request for documentation.

Characteristics that are not absolutely essential for proper identification and establishment of requirements should be omitted. Many nonstandard items become cost prohibitive through OVER-SPECIFYING. When the requirements and tests in the specification referenced with Code 1006 meet the user's requirements, parameters (codes) which are void of an asterisk (*), at the far left edge of the Specification Requirements List, should not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.1.1 Tabulation Table

The AEDPS has the capability for documenting a number of parts on a single specification. This subparagraph provides the instructions necessary to use this capability. A removable foldout Tabulation Table form is furnished following the SRS forms located in Section 1.3. This form is to be locally reproduced for use in submitting requests for computer generated Military Specification, Exceptions. An example of Tabulation Table usage is detailed in the following paragraphs.

The Tabulation Table provides the capability for tabulation of 50 items and up to 10 variables per item. The SRS form may be used in lieu of the Tabulation Table for reasons of convenience or necessity due to write-in space limitations. If the SRS form is used, each pertinent Characteristic Code and corresponding value(s) must be transposed to the SRS using the rules outlined in 1.2.1.

In using the Tabulation Table, for example, it may be required that several actuators be specified, all having the same electrical characteristics but different operating temperature ranges. Each actuator will then be identified by a dash number assigned to the generated document basic part number, such as 01 through 03 as shown in the Tabulation Table illustration. On the Tabulation Table adjacent to Code 8000 is entered the Characteristic Code used to designate the minimum operating temperature and adjacent to Code 8051 is entered the Characteristic Code used to designate the maximum operating temperature; in this case, Codes 3274 (minimum) and 3276 (maximum). Adjacent to each subsequent Characteristic Code in the first column is entered the desired minimum operating temperature value (degrees C), and adjacent to each subsequent Characteristic Code in the second column is entered the desired maximum operating temperature value (degrees C).

The Tabulation Table may also be used for tabulating dimensions from Appendix A. From the above example, it may be required that each actuator’s body length be different. Body length for actuator figures is represented by the legend letters “AA” and Characteristic Code 1010 in Appendix A. It is not necessary to write in the code for legend “AA” on the Tabulation Table, but it is necessary to specify the Characteristic Codes representing the minimum and/or the maximum dimensions. Minimum body length, Code 1011, is entered adjacent to Code 8102 and/or maximum body length, Code 1012, is entered adjacent to Code 8153. The minimum dimensional value for the dash-number 01 item is then specified with Code 8103 and the maximum dimensional value is specified with Code 8154, as applicable. Applicable dimensions or other values not requiring tabulation shall be specified on the SRS along with applicable code(s) (see 1.2.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The following will illustrate the proper usage of the Tabulation Table and Characteristic Codes for the example described above.

DASH NUMBER	CHARACTERISTICS CODE COL. 13-16	TABULATION CODE AND VALUES COL. 17-	CHARACTERISTICS CODE COL. 13-16	TABULATION CODE AND VALUES COL. 17-	CHARACTERISTICS CODE COL. 13-16	TABULATION CODE AND VALUES COL. 17-	CHARACTERISTICS CODE COL. 13-16	TABULATION CODE AND VALUES COL. 17-
	8000	3274#	8051	3276#	8102	1011#	8153	1012#
01	8001	-55#	8052	85#	8103	4.25#	8154	4.75#
02	8002	-65#	8053	125#	8104		8155	3.686#
03	8003	-65#	8054	200#	8105	8.935#	8156	8.941#
04	8004		8055		8106		8157	
05	8005		8056		8107		8158	
06	8006		8057		8108		8159	

In addition to applicable dimensional values from Appendix A, the following is a list of Characteristic Codes and titles that are candidates for Tabulation Table usage within the scope of this document.

ACTUATORS, ELECTROMECHANICAL, ROTARY

Characteristic Code	Title
1009	Drawing Figure Number
1562	Minimum Starting Current (amperes)
1564	Maximum Starting Current (amperes)
1566	Minimum Starting Current (milliamperes)
1568	Maximum Starting Current (milliamperes)
1570	Minimum Operating Current (amperes)
1572	Maximum Operating Current (amperes)
1574	Minimum Operating Current (milliamperes)
1576	Maximum Operating Current (milliamperes)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

ACTUATORS ELECTROMECHANICAL, ROTARY (CONT.)

Characteristic Code	Title
1580	Time to Reach Rated Speed Under Maximum Load (seconds)
1582	Time to Reach Rated Speed Under Rated Load (seconds)
1584	Minimum Operating Speed Under Rated Load (RPM)
1586	Maximum Operating Speed Under Rated Load (RPM)
1588	Nominal Operating Speed Under Rated Load (RPM)
1594	Minimum Operating Speed Under Maximum Operating Load (RPM)
1596	Maximum Operating Speed Under Maximum Operating Load (RPM)
1598	Nominal Operating Speed Under Maximum Operating Load (RPM)
1604	Minimum Operating Speed Under No-Load Condition (RPM)
1606	Maximum Operating Speed Under No-Load Condition (RPM)
1608	Nominal Operating Speed Under No-Load Condition (RPM)
1614	Minimum Breakaway Torque at Output Shaft (pound-inches)
1616	Maximum Breakaway Torque at Output Shaft (pound-inches)
1618	Nominal Breakaway Torque at Output Shaft (pound-inches)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

ACTUATORS, ELECTROMECHANICAL, ROTARY (CONT.)

Characteristic Code	Title
1620	Shaft Overtravel in Terms of Degrees Only
1622	Shaft Overtravel in Terms of Minutes Only
1624	Shaft Travel in CW Direction for Bi-directional Actuator (degrees)
1626	Shaft Travel in CCW Direction for Bi-directional Actuator (degrees)
1628	Shaft Travel in CW Direction Only (degrees)
1630	Shaft Travel in CCW Direction Only (degrees)
1632	Shaft Travel in Either Direction (degrees)
1636	Minimum Operating Torque at Output Shaft (pound-inches)
1638	Maximum Operating Torque at Output Shaft (pound-inches)
1640	Nominal Operating Torque at Output Shaft (pound-inches)
1642	Minimum Stall Torque (pound-inches)
1644	Maximum Stall Torque (pound-inches)
1646	Nominal Stall Torque (pound-inches)
1648	Holding Torque (pound-inches)
1650	Rated Load (pounds)
1652	Maximum Operating Load (pounds)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

ACTUATORS , ELECTROMECHANICAL, ROTARY (CONT.)

Characteristic Code	Title
1654	Stall Load (pounds)
1656	Output Shaft Revolutions in CW Direction for Bi-Directional Actuators
1658	Output Shaft Revolutions in CCW Direction for Bi-Directional Actuators
1669	Output Shaft Revolutions in CW Direction Only
1662	Output Shaft Revolutions in CCW Direction Only
167$	Maximum Backlash with Rated Load (degrees)
1672	Maximum Backlash without Load (degrees)
1674	Coast with Rated Load (degrees)
1676	Coast with No-Load (degrees)
1678	Coast with Maximum Operating Load (degrees)
1680	Output Shaft Position Repeatability (degrees of arc)
1682	Output Shaft Position Repeatability (minutes of arc)
1684	First Stop Position for Shaft Rotation (degrees)
1686	Second Stop Position for Shaft Rotation (degrees)
1688	Third Stop Position for Shaft Rotation (degrees)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

ACTUATORS, ELECTROMECHANICAL, ROTARY (CONT.)

Characteristic Code	Title
1690	Fourth Stop Position for Shaft Rotation (degrees)
1692	Fifth Stop Position for Shaft Rotation (degrees)
1694	Sixth Stop Position for Shaft Rotation (degrees)
1718	Operating Speed Adjustment Range (low speed)
1720	Operating Speed Adjustment Range (high speed
1726	Time Required to Reverse from Full Speed one Direction to Full Speed in other Direction (seconds)
1732	Position Transmitter Specification Number
1738	Duty Cycle (minutes) On
1740	Duty Cycle (minutes) Off
1742	Duty Cycle (seconds) On
1744	Duty Cycle (seconds) Off
1750	Duty Cycle Reference Temperature (degrees C)
1754	Actuator Rated Life (hours)
1766	Motor-to-Output Shaft Gear Ratio
1768	Maximum Side Loads Output Shaft may be Subjected to (pounds)
3208	Electric Motor Specification Number
3212	Power Consumption at Rated Load (watts)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

ACTUATORS, ELECTROMECHANICAL, ROTARY (CONT.)

Characteristic Code	Title
3214	DC Power Source (volts)
3216	Voltage for AC Power Source
3218	Frequency for AC Power Source
3220	Phase for AC Power Source
3222	Power Source Category per MIL-STD-704
3224	Electrical Connector Specification Number
3226	Electrical Wiring Specification Number
3230	Minimum Wire Size (AWG
3232	Electrical Connections Specification Number
3234	Actuator Weight (ounces)
3236	Actuator Weight (pounds)
3242	Self-Locking Nut Specification Number
3251	Output Shaft Configuration Type of Figure 250-02-1
3258	Actuator Lubricant Specification Number
3260	Gear Lubricant Specification Number
3262	Bearing Lubricant Specification Number
3274	Minimum Operating Temperature (degrees C)
3276	Maximum Operating Temperature (degrees C)
3280	Storage Low Temperature (degrees C)
3282	Storage High Temperature (degrees C)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

ACTUATORS , ELECTROMECHANICAL, ROTARY (CONT.)

Characteristic Code	Title
3284	Operating Low Pressure (Torr)
3286	Operating High Pressure (Torr)
3288	Operating Altitude (feet)

1.2.2 Effectivity of Data

Preparation of an acceptable computer generated document is dependent upon clear, accurate, complete, and concise delineation of the requirements on the SRS. The information provided on the SRS is furnished directly into the computer and any inaccuracies or inadequacies in the data submitted will directly affect the computer generated document.

1.2.3 Writing Methodology

The following rules govern the write-in of values on the SRS and applicable appendices:

a. Only block lettering shall be used.

b. The letter “O” shall be a round circle.

c. The numeral zero shall be a round circle with a diagonal line through it “0”.

d. The letter “I” shall have pronounced serifs top and bottom.

e. The numeral “one” shall be a straight vertical line “1”.

f. The letter “Z” shall have a horizontal line through it “Z”.

g. The “±” sign or the words “plus or minus” shall not be used. “+ or -“ should be the form used, if needed.

h. The signs “$”, “¢”, or “!” shall never be used.

i. Except for materials (MIL-STD-35-1) and finishes (MIL-STD-35-2), abbreviations conforming to MIL-STD-12 may be used for reasons of convenience or write-in space limitations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

j. The pound sign "#" must never be used, except to indicate the end of a value or write-in, where it must always be used. If the last character of the write-in should fall in column 79 of the SRS, the pound sign "#" should not be placed in column 80. A new line should be started by placing a "1" in column 80 of the first line, a "2" in column 80 of the second line, and the pound sign "#" entered in column 17 of the second line (a write-in shall never exceed 3 lines on the SRS as this is equal to the 189 character write-in limit).

k. All fractions must be specified in decimal form. All values less than one (1.0) must be preceded by the numeral 0; i.e., 0.375.

l. When a write-in value is used to express percentage, the value must be followed by the word "percent", and not the sign "%". If (percent) is shown in the Specification Requirements, the word should not be repeated on the SRS.

m. When a write-in value is used to express temperature in degrees C (Celsius), the value must be followed by the word "degrees C" and not the sign "°C". If degrees C is shown on the Specification Requirements List as (degrees C), the word need not be repeated on the SRS as it will be provided automatically in the generated document.

n. The minus sign "-" must be used with negative numerical values; for example, to express a temperature that is "12 below zero" (degrees C), the written-in value must be preceded by the minus sign " -12"; but, the plus sign "+" shall not be used with positive numerical values.

o. When it is required to express an exponential value on the SRS, such as 2.0 X 105, the value shall be written as follows: "2.0 X 10 TO THE 5TH POWER".

1.2.4 Characteristic Codes and Characteristic Value Codes

Each characteristic name which defines a requirement has been assigned a code number for use in the computer. These codes are referred to as characteristic codes, and are a numeric value, therefore all characteristic codes must have the zeroes slashed with a diagonal line (0) when entered on the SRS. Additional characteristic codes which are required to further define an item are contained in the appendices to the Specification Requirements. These are:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Dimension Legends	Appendix A (see 1.2.6)
Applicable Documents Table	Appendix B (see 1.2.9)
First Article Inspection Table	Appendix C (see 1.2.10)
Group A Quality Conformance Table	Appendix D (see 1.2.10)
Group B Quality Conformance Table	Appendix E-1 (see 1.2'.10)
Group B Quality Conformance Table	Appendix E-2 (see 1.2.10)
Group C Quality Conformance Table	Appendix F (see 1.2.10)
Quality Conformance Sequence Table	Appendix G (see 1.2.10)
Deleted Test Table (Groups A, B, and C)	Appendix H (see 1.2.10)
Deleted First Article Tests	Appendix J (see 1.2.10)
Source Tabulation Table	Appendix S (see 1.2.71)

Note: It is not necessary to complete each Characteristic Code on each line of the Appendices or Tables. For example, if Code 6125 is used in Appendix C, Codes 6126, 6127, and 6128 need not be used on the SRS if no value or write-in is to be specified with these Codes. When the computer document is generated, printouts of specified Tables and Appendices will be similar in format to those shown in this document. Therefore, a blank space will be provided in that column and line where a Characteristic Code and value are not specified.

Specification titles, materials, and finishes have been assigned code numbers for computer use. These are referred to as Characteristic Value Codes. The Characteristic Value Codes required for completing the SRS are located as follows:

Specification Titles	Section 1.1
Materials	MIL-STD-35-1
Finishes	MIL-STD-35-2

1.2.5 Actuator Characteristics

The actuator characteristics are tabulated in the Specification Requirements List (SRL).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.6 Dimensions and Drawings

Dimensional Data must be supplied for all legends applicable to the actuator selected in Section 1.3. All values must be in inches and must be in numerical decimal form. All values less than one (1.0) must be preceded by the numeral 0; i.e., 0.375. The Dimension Table and related Characteristic Codes are provided as Appendix A. Both the minimum and maximum values and the legend letters shall be specified, as applicable. It is not necessary to complete each line or the entire Appendix A, use only those codes that are applicable to the Drawing Figure selected. When Appendix A is used with the SRS, Characteristic Codes representing the applicable legend letters must be placed on the SRS as well as the code number for the minimum and/or maximum dimensional data specified. If Appendix A is used in conjunction with the Tabulation Table, it is not necessary to specify the legend letter code, only the dimensional data code(s). For “reference”, “nontolerance”, and “thread dimensions”, the dimension shall be placed in the minimum column and “REF”, “NTOL”, or thread type, such as “UNC” or “NEF”, shall be entered in the maximum column. If length of thread is necessary, it must be entered in the minimum column; for example, 6-32X0.250.

Caution: When a Figure is shown in the Configuration and Drawing Section that might need a minor change, a copy of the marked up figure may be submitted with the SRS. When there is no figure shown that can be used without a major change, do not proceed. To have an unlisted item covered, a drawing with all dimensions must be furnished USAMICOM,”Attn: AMSMI-RCS. A drawing with legend letters will be prepared, assigned a figure number, and returned to the requester.

Dimensional Data may be tabulated by using the Tabulation Table form provided in this document. Usage of this table is detailed in 1.2.1.1.

1.2.7 Materials and Finishes

Whenever the Specification Requirements reference a material or finish, its code may be entered on the SRS with the 6 digit Characteristic Value Code from the left-hand column of MIL-STD-35-1, or MIL-STD-35-2, as applicable. The material or finish nomenclature shown in the center column will be the exact words that will appear in the generated document. When a material or finish specification is desired, it may be entered on the SRS with the applicable code from the Specification Requirements. Documents other than those specified in the right-hand column of MIL-STD-35-1 and MIL-STD-35-2 may be used, if necessary. Any document referenced must also be entered on the SRS with a code from Appendix B.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Note: When a desired material or finish is not shown, the system has the capability for accepting write-ins; i.e., "Steel" may be shown as a material and "Tin" may be shown as a finish.

To have an unlisted material or finish added to MIL-STD-35-1 or MIL-STD-35-2, the nomenclature and any applicable specifications for the desired material or finish must be furnishbd to USAMICOM, Attn: AMSMI-RCS. The assigned Characteristic Value Codes will be returned to the requester.

1.2.8 Additional Requirements, Marking, Packaging, Quality Assurance, and Notes

Computer generated documents have the capability of accepting additional write-ins, over and above the parameters specified in the Specification Requirements by specific Characteristic Codes. These write-ins will appear in the completed document as Section 3 for the Requirements and Marking, Section 4 for the Quality Assurance, Section 5 for the Packaging, and Section 6 for the Notes. Codes to be used are as follows:

Requirements	7001 through 7005
Marking	6991 through 6995
Quality Assurance	7011 through 7015
Packaging	7006 through 7010
Notes	7016 through 7020

These should be completed on the SRS using the codes shown above. The write-ins should be in the exact words desired, but limited to 189 characters (including spaces and punctuation marks) for each characteristic code. When an additional requirement is added in Codes 7001 through 7005, an additional test is usually required (Codes 7011 through 7015).

Computer generated documents on actuators will automatically have a requirement to package them in accordance with the specification shown with Code 1006. If there are additional packaging requirements, these should be added through the use of Codes 7006 through 7010.

If additional notes are required in Section 6, these should be stated using Characteristic Codes 7016 through 7020.

Part marking shall be in accordance with the document shown with Code 1006. Additional marking requirements may be specified on the SRS with appropriate codes between 6991 and 6995.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.9 Applicable Documents

Any specification or other document entered as a characteristic value for any Characteristic Code must also be listed with a code from Appendix B, in its proper numerical sequence. Only the number is required. Specification and/or document number entries shall be void of blank spaces; i.e., a number, letter, or punctuation mark must occupy every space from the beginning to the end of the entry. For example, MIL-STD-462 must be entered on the SRS as: 2504MIL-STD-462#. It is not necessary to list titles.

In addition to the above, add the below-listed documents when the indicated codes are used:

Document (Subject)	Code (Test)	
MIL-M-7969 (AC Motors)	3204	(Motor)
	3206	(Motor)
MIL-M-8609 (DC Motors)	3200	(Motor)
	3202	(Motor)
MS16624 (Basic External Retaining Ring)	3264	(Retaining Rings)
MS16625 (Basic Internal Retaining Ring)	3264	(Retaining Ring)
MS20995 (Safety or Lock Wire)	3246	(Locking of Parts)
MS33540 (Safety Wiring and Cotter Pinning)	3246	(Locking of Parts)
MS33547 (Spripg Pins)	3272	(Spring Pin Usage)
MIL-STD-105 (Sampling Procedures and Inspection Tables)	7033	(Group A Sampling Plan)
	7044	(Group B Inspection)
MIL-STD-130 (Identification Marking)	3290	(Nameplate and Product Marking)
MIL-STD-461 (Electromagnetic Interference Characteristics)	2512	(Interference, Conducted)
	2514	(Interference, Conducted)
	2530	(Interference, Radiated)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Document (Subject)	Code (Test)	
MIL-STD-462 (Electmnagnetic Interference Characteristics)	2504	(Interference, Conducted)
	2506	(Interference, Conducted)
	2524	(Interference, Radiated)
MIL-STD-704 (Electric Power)	3222	(Input Power)
MIL-STD-810 (Environmental Test Methods)	1784	(Altitude)
	1786	(Altitude)
	1855	(High Temperature)
	1856	(High Temperature)
	1923	(Low Temperature)
	2004	(Temperature Shock)
	2043	(Rain)
	2246	(Explosive Atmosphere)
	2248	(Explosive Atmosphere)
	2250	(Explosive Atmosphere)
	2334	(Acceleration)
	2454	(Combined Temperature-Humidity-Altitude)
	2604	(Humidity)
	2606	(Humidity)
	2608	(Humidity)
	2610	(Humidity)
	2612	(Humidity)
	2703	Fungus Resistance)
	2754	Salt Fog)
	2824	(Dust)
	2884	(Leakage, Immersion)
	2886	(Leakage, Immersion)
	2953	(Vibration)
	3036	(Acoustical Noise)
	3038	(Acoustical Noise)
	3040	(Acoustical Noise)
	3042	(Acoustical Noise)
	3104	(Shock)
FED-STD-595 (Color)	4548, 4558, 4568, 4578, 4588, 4598, 4608, 4618, 4628, 4638, 4648, 4658	(Finishes]

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Document (Subject)		Code (Test)
H4-1 (FSCM, USA and Canada, Name to Code)		(Source Table or Source Tabulation Table)
NAS561 (Spring Pins)	3268	(Spring Pins)

1.2.10 Quality Assurance and Conformance

Quality Assurance requirements are mandatory to the preparation of an acceptable final document. Appendices C, D, E, F, G, H, and J are to be used when making changes to the First Article, Group A, B, and C inspections. Unless modified, these inspections will be in strict accordance with the procedures outlined in the applicable general specification. If it is desired to add, delete, or modify the tests or sequence in any manner, the exceptions must be specified on the SRS with codes from the Quality Assurance Requirements and/or the applicable appendices. One requirement must be selected from each of Groups A, B, and C. Enter an "X" in the value column by the selected Characteristic Code.

If Appendix D is used with Code 7031, the last three columns should be used to specify the sampling plan. If sampling, as specified in MIL-STD-105, is to be used, use Code 7033 with an "X" and specify the inspection level in the Quantity Inspected column and the applicable AQL's in the "AQL" columns. The generated document will specify normal inspection, single sampling. If 100 percent sampling is to be used, use Code 7034 with an "X" and specify 100 percent in the Quantity Inspected column. If a limit is to be placed on the percent defective for 100 percent inspection, use Code 7035 and specify the maximum percent defective. If the tests to be performed are to be divided into subgroups, use Code 7036 with an "X"; the subgroup number should be shown in the Title column, and the sampling plan applicable to all tests in the subgroup should be shown in the remaining columns. The tests that make Up the subgroup should be listed, in the order they are to be performed, in the Title column. The generated document will specify that all tests listed under a subgroup will be combined and inspected per the sampling plan specified.

Military Specification Exceptions will eliminate requirements for Qualification.

1.2.11 Detailed Requirements

A Specification Title Index (Section 1.1) with Characteristic Value Codes has been established for each title and the related applicable general specification. The Characteristic Value Code for the actuator

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

title selected must be entered in the title code block at the top of each page of the SRS. The six digits of the serial number shall be shown and may be used for user internal control.

Caution: When there is no suitable Specification Title Code, do not proceed. To have a Specification Title Code assigned, a request must be forwarded to USAMICOM, Attn: AMSMI-RCS, giving the desired title along with the related applicable general specification. A code will be assigned and returned to the requester.

1.2.12 Date

The date the user desires to appear on his generated document must be written in military format with Code 1003 on the SRS; i.e., 3 July 1973. Do not abbreviate month or year (a space must appear between date, month, and year).

1.2.13 FSCM/Code Ident of Requester

The requester's Federal Supply Code for Manufacturers (FSCM) shall be entered on the SRS with Code 1004. The FSCM can be obtained from Cataloging Handbook H4-1 when unknown.

1.2.14 Prime Contract Number

It is necessary for statistical purposes to have the contract number of the prime contract entered on the SRS with Code 1005. If the contract number is unknown, the requester's Contracts Department can furnish it. For government use, the abbreviated proper name and office symbol shall be used; i.e., "USAMICOM, AMSMI-RCS".

1.2.15 Applicable General Specification

The applicable general specification is the document to which an exception is being taken and can be found in the Specification Title Index in each part of this Standard. The specification must be entered on the SRS with Code 1006 (the slash sheet, MS number, or part number should be entered, if applicable, to identify the item). The number must also be entered on the SRS with the appropriate code from Appendix B (without slash or part number). If MS numbers are used, these must also be shown on the SRS with codes from Appendix B.

1.2.16 Generated Document

The generated document provides exceptions to an existing specification. The existing specification details will be binding unless the generated document makes an exception. The combined provisions, require-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

ments, and tests of the two documents will then be the document for procurement.

1.2.17 Item Application

Code 1008 must show item application such as: next assembly drawing number or type of equipment; i.e., AN/GRC-19, MISSILE X, etc.

1.2.18 Drawing Figure Number

Code 1009 must show the figure number selected from Section 1.3.

1.2.19 Dimensions

Use Appendix A to complete the SRS with the required dimensions (see 1.2.6).

1.2.20 Design Characteristics

It is mandatory to specify design characteristics on the SRS by using at least one of the following.

1.2.20.1 Starting Current

Starting current may be specified in amperes or in milliamperes by using one of the following:

a. Amperes. Write in the minimum value (amperes) with Code 1562,. or write in the maximum value (amperes) with Code 1564, or write in both the minimum and the maximum value (amperes) with Codes 1562 and 1564, respectively.

b. Milliamperes. Write in the minimum value (milliamperes) with Code 1566, or write in the maximum value (milliamperes) with Code 1568, or write in both the minimum and the maximum values (milliamperes) with Codes 1566 and 1568, respectively.

1.2.20.2 Operaing Current

Operating current may be specified in amperes or in milliamperes by using one of the following:

a. Amperes. Write in the minimum value (amperes) with Code 1570, or write in the maximum value (amperes) with Code 1572, or write in both the minimum and the maximum values (amperes) with Codes 1570 and 1572, respectively.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

b. Milliamperes. Write in the minimum value (milliamperes) with Code 1574, or write in the maximum value (milliamperes) with Code 1576, or write in both the minimum and the maximum values (roil 1 i amperes) with Codes 1574 and 1576, respectively.

1.2.20.3 Acceleration

The time in which the actuator shall reach rated speed either under maximum operating load or under rated load may be specified by using one of the following:

a. Maximum Operating Load. Write in the time value (seconds) with Code 1580.

b. Rated Load. Write in the time value (seconds) with Code 1582.

1.2.20.4 Operating Speed With Load

The actuator operating speed either under rated load or under maximum operating load may be specified by using one of the following:

a. Rated Load. Write in both the minimum and the maximum speed values with Codes 1584 and 1586, respectively; or write in the nominal speed value (RPM) with Code 1588; or write in the two values, time (seconds) per (degrees of arc) with Codes 1590 and 1592, respectively.

b. Maximum Operating Load. Write in both the minimum and the maximum speed values (RPM) with Codes 1594 and 1596, respectively; or write in the nominal speed value (RPM) with Code 1598; or write in the two values, time (seconds) per (degrees of arc) with Codes 1600 and 1602, respectively.

1.2.20.5 Operating Speed Without Load

The actuator operating speed under no-load conditions may be specified by writing in both the minimum and the maximum speed values (RPM) with Codes 1604 and 1606; or by writing in the nominal speed value (RPM) with Code 1608; or by writing in the two values, time (seconds) per (degrees of arc) with Codes 1610 and 1612, respectively.

1 .2.20.6 Breakaway Torque

A requirement that the actuator shall provide, at the output shaft, a breakaway torque may be specified by writing in both the minimum and the maximum torque values (pound-inches) with Codes 1614 and 1616, respectively; or by writing in the minimum torque value (pound-inches)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

with Code 1614; or by writing in the maximum torque value (pound-inches) with Code 1616; or by writing in the nominal torque value (pound-inches) with Code 1618.

1.2.20.7 Overtravel

The maximum allowable actuator shaft overtravel may be specified by writing in both the overtravel values (degrees of arc) and (minutes of arc) with Codes 1620 and 1622, respectively; or by writing in the overtravel value (degrees of arc) with Code 1620; or by writing in the overtravel value (minutes of arc) with Code 1622.

1.2.21 Actuator Materials

Actuator materials may be specified on the SRS by generating the Actuator Materials Table (refer to Table I, located before the appendices).

This table provides the capability to specify material for from one to twelve components. For each code used from the COMPONENT column, a corresponding code must be used from the MATERIAL column. If desired, one or more of the corresponding codes in the remaining columns (SPECIFICATION, NUMBER OR ALLOY NUMBER, CONDITION OR TEMPER, FORM, CLASS, GRADE, TYPE, and COMPOSITION) may also be used. (See Note in 1.2.4 for explanation of blank columns in tables.)

For the first component and material to be specified, use the instructions following:

a. Component. Write in the component nomenclature with Code 5080.

b. Material. Enter the assigned Characteristic Value Code found in MIL-STD-35-1 with Code 5081. (See 1.2.7)

c. Specification. If it is desired to specify a specification for the material selected, enter the specification number found in MIL-STD-35-l with Code 5082. “If no specification is listed, or a specification other than the one listed is required, write in the specification number with Code 5082. (See 1.2.7)

d. Number or Alloy Number. If it is desired to specify number or alloy number, write in the number with Code 5083.

e. Condition or Temper. If it is desired to specify condition or temper, write in the condition or temper designation with Code 5084.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

f. Form. If it is desired to specify form, write in the form designation with Code 5085.

g. Class. If it is desired to specify class, write in the class designation with Code 5086.

h. Grade. If it is desired to specify grade, write in the grade designation with Code 5087.

i. Type. If it is desired to specify type, write in the type designation with Code 5088.

j. Composition. If it is desired to specify composition, write in the composition designation with Code 5089.

Repeat the above procedure for any additional components and materials required, starting with the next available code from the COMPONENT column (Codes 5090, 5100, etc.).

The following is an example of SRS entries which might be made to specify materials for housing and rollpin.

CHAR CODE 13 14 15 16	VALUE
5080	HOUSING#
5081	STI779#
5082	QQ-S-763#
5084	A#
5088	420#
5090	ROLLPIN#
5091	ST0595#
5092	QQ-S-700#
5094	ROCKWELL C 46-53 OR EQUIVALENT#

1.2.22 Actuator Finishes

Actuator finishes may be specified on the SRS by generating the Actuator Finishes Table (refer to Table II, located before the appendices).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

This table provides the capability to specify finish for from one to twelve components. For each code used from the COMPONENT column, a corresponding code must be used from the COMPONENT SURFACE and FINISH columns. If desired, one or more of the corresponding codes in the remaining columns (SPECIFICATION, CLASS, TYPE, GRADE, COLOR NAME OR NUMBER FROM FED-STD-595, and MAXIMUM and/or MINIMUM THICKNESS) may also be used. (See Note in 1.2.4 for explanation of blank columns in tables.)

For the first component, component surface, and finish to be specified, use the instructions following:

a. Component. Write in the component nomenclature with Code 4541.

b. Component Surface. Write in the component surface to be finished with Code 4542.

c. Finish. Enter the assigned Characteristic Value Code found in MIL-STD-35-2 with Code 4543. (See 1.2.7)

d. Specification. If it is desired to specify a specification for t e fresh selected, enter the specification number found in MIL-STD-35-2 with Code 4544. If no specification is listed, or a specification other than the one listed is required, write in the specification number with Code 4544. (See 1.2.7)

e. Class. If it is desired to specify class, write in the class -nation with Code 4545.

f. Type If it is desired to specify type, write in the type designation with Code 4546.

g. Grade. If it is desired to specify grade, write *in* the grade designation with Code 4547.


h. Color. If it is desired to specify color, either write in the color name or write in the color number found in FED-STD-595 (see 1.2.7) with Code 4548.

i. Thickness. If it is desired to specify finish thickness, write in the maximum value (inch) with Code 4549 or write in the minimum value (inch) with Code 4550, or write in both the maximum and minimum values (inch) with Codes 4549 and 4550, respectively.

Repeat the above procedure for any additional components and finishes required, starting with the next available code from the COMPONENT column (Codes 4551, 4561, etc.).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The following is an example of SRS entries which might be made to specify finishes for housing and rollpin.

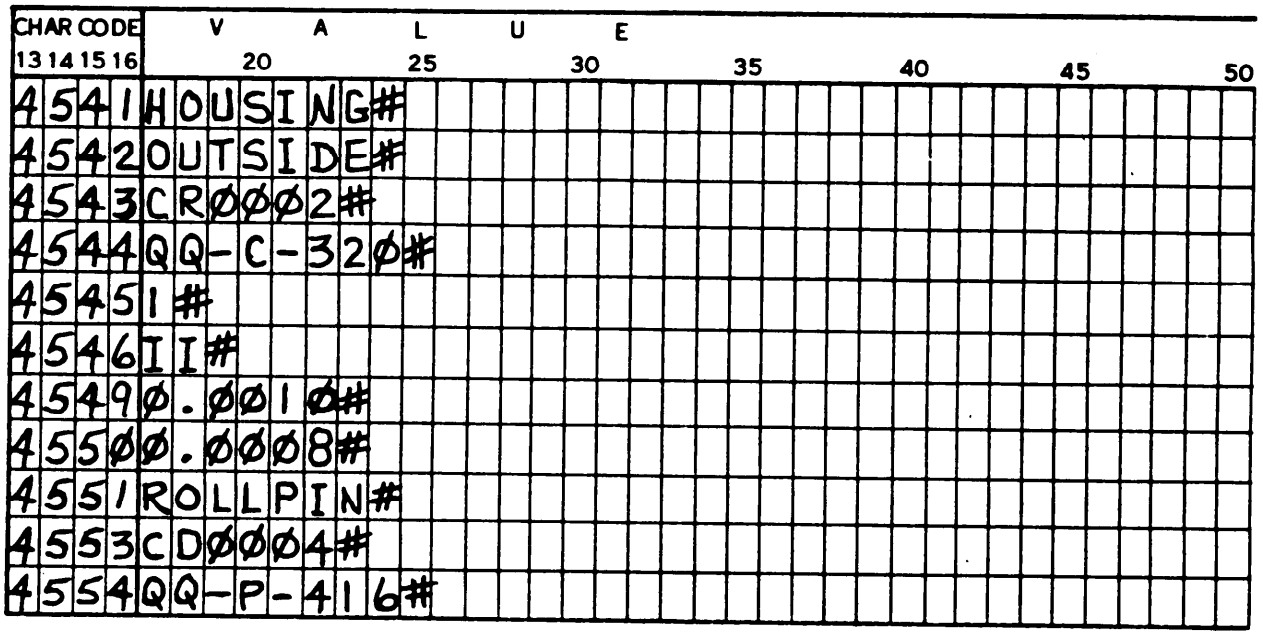

1.2.23 Travel

The direction and amount of rotation that the actuator shaft shall be capable of may be specified on the SRS by writing in both the amount of clockwise rotation (degrees) with Code 1624 and the amount of counterclockwise rotation (degrees) with Code 1626; or by writing in the amount of clockwise rotation only (degrees) with Code 1628; or by writing in the amount of counterclockwise rotation only with Code 1630; or by writing in the amount of rotation in either direction (degrees) with Code 1632.

It may also be specified that clockwise and counterclockwise direction is determined when facing the output shaft-end of the actuator by entering an “X” with Code 1634.

1.2.24 Operating Torque

The operating torque that the actuator shall provide at the output shaft may be specified on the SRS by writing in both the minimum and the maximum values (pound-inches) with Codes 1636 and 1638, respectively; or by writing in the minimum value (pound-inches) with Code 1636; or by writing in the maximum value (pound-inches) with Code 1638; or by writing in the nominal value (pound-inches) with Code 1640.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.25 Stall Torque

The actuator stall torque may be specified on the SRS by writing in the minimum value (pound-inches) with Code 1642; or by writing in the maximum value (pound-inches) with Code 1644; or by writing in both the minimum and the maximum values (Pound-inches) with Codes 1642 and 1644. respectively; or by writing in the nominal value (pound-inches) with Code 1646.

1.2.26 Holding Torque

The actuator static holding torque may be specified on the SRS by writing in the torque value (pound-inches) with Code 1648.

1.2.27 Rated Load

Rated load may be specified on the SRS by writing in the load value (pounds) with Code 1650.

1.2.28 Maximum Operating Load

Maximum operating load may be specified on the SRS by writing in the load value (pounds) with Code 1652.

1.2.29 Stall Load

Stall load may be specified on the SRS by writing in the load value (pounds) with Code 1654.

1.2.30 Output Shaft Revolutions

The number and direction of revolutions that the actuator output shaft shall be capable of may be specified on the SRS by using one of the following:

a. Write in both the number of revolutions in the clockwise direction with Code 1656 and the number of revolutions in the counterclockwise direction with Code 1658.

b. Write in the number of revolutions in the clockwise direction only with Code 1660.

c. Write in the number of revolutions in the counterclockwise direction only with Code 1662.

d. Enter an “X” with Code 1664 to specify that there shall be no limitation on the number of output shaft revolutions in either direction.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

e. Enter an "X" with Code 1666 to specify that there shall be no limitation on the number of output shaft revolutions in the clockwise direction.

f. Enter an "X" with Code 1668 to specify that there shall be no limitation on the number of output shaft revolutions in the counterclockwise direction.

1.2.31 Backlash

Backlash may be specified on the SRS either by writing in the value for maximum backlash (degrees) with rated load with Code 1670, or by writing in the value for backlash (degrees) without rated load with Code 1672.

1.2.32 Coast

The maximum allowable actuator shaft coast may be specified on the SRS by using one of the following:

a. At Rated Load. Write in the coast value (degrees) with Code 1674.

b. At No-Load. Write in the coast value (degrees) with Code 1676.

c. At Rated Load and at No-Load. Write in both the coast value at rated load (degrees) with Code 1674 and the coast value at no-load (degrees) with Code 1676.

d. At Maximum Operating Load. Write in the coast value (degrees) with Code 1678.

1.2.33 Repeatability

The actuator output shaft position repeatability, with constant input power, may be specified on the SRS either by writing in both the degrees of arc value with Code 1680 and the minutes of arc value with Code 1682 or by writing in the minutes of arc value with Code 1682.

1.2.34 Travel Limit Stops

A requirement that the actuator shall incorporate stops to limit shaft rotation may be specified on the SRS by using one of the following:

a. Specify from one up to six stops by writing in the stop position value(s) (degrees) with one or more applicable code(s):

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

stop	Code
First	1684
Second	1686
Third	1688
Fourth	1690
Fifth	1692
Sixth	1694

In addition to, or in lieu of, the above, an "X" may be entered with Code 1696 to specify at end of travel.

b. Specify that the shaft shall be stopped at one or more selected position(s) in either direction by writing in the number of positions with Code 1698.

c. Specify that the shaft rotation may be stopped at any infinite number of positions by entering an "X" with Code 1700.

Physical makeup of the stops specified with the above code(s) may also be specified by entering an "X" with one of the following codes:

Travel Limit Stop Description	Code
Cam operated limit switches	1702
Externally adjustable limit switches	1704
Internally adjustable limit switches	1706
Accomplished by use of a potentiometer	1708
Nonjamming mechanical stops	1710

1.2.35 Brakes

The means for accomplishing actuator braking may be specified on the SRS by entering an "X" with one of the following codes:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Means	Code
Electromechanical brake	1712
Dynamic brake	1714
Friction brake	1716

1.2.36 Operating Speed Adjustments

The operating speed adjustment range may be specified on the SRS by writing in both the low speed value (RPM) with Code 1718 and the high speed value (RPM) with Code 1720. This will indicate that the operating speed may be established, by adjustment, to any selected speed within (and including) the two speeds specified.

1.2.37 Reversibility

The reversal of actuator rotation may be specified on the SRS by using one of the following:

a. If, after being de-energized, the shaft shall be returned to its original position by a spring or other suitable device, enter an "X" with Code 1722.

b. If the rotation may be stopped and electrically reversed at any point, enter an "X" with Code 1724.

If Code 1724 is used, the maximum time required to reverse from full speed in one direction to full speed in the opposite direction may also be specified by entering the time value (seconds) with Code 1726.

1.2.38 Position Transmitters

A requirement that position transmitters shall be integrally installed in the actuator may be specified on the SRS by entering an "X" with Code 1728.

One or both of the following may also be used:

a. Enter an "X" with Code 1730 to specify that the position transmitters shall be readily accessible and easily removed for maintenance and replacement.

b. Write in the specification number with Code 1732 (see 1.2.9) to specify that the position transmitters shall conform to that specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.39 Thermal Protection

A requirement that integral thermal protection shall be provided to prevent actuator damage due to mechanical and electrical overloads and exceeding the permissible duty cycle may be specified on the SRS by entering an "X" with Code 1734.

1.2.40 Duty Cycle

Duty cycle may be specified on the SRS by using one of the following:

a. Enter an "X" with Code 1736 to specify that the actuator shall be capable of a continuous duty cycle under any adverse combination of maximum rated load and electrical and environmental parameters specified at standard conditions.

b. Specify duty cycle with rated load by using one of the following:

(1) Write in both the time on value (minutes) with Code 1738 and the time off value (minutes) with Code 1740.

(2) Write in both the time on value (seconds) with Code 1742 and the time off value (seconds) with Code 1744.

(3) Write in both the time on value (seconds) with Code 1746 and the time off value (minutes) with Code 1748.

Temperature may also be specified in conjunction with b. (1), b. (2), orb. (3) by writing in the value (degrees C) with Code 1750.

1.2.41 Overriding Loads

A requirement that overriding loads shall not cause sufficient overspeeding of the actuator during operation to cause failure of, or damage to, the actuating system and that overriding loads shall not increase the stopping distance beyond that specified in the specification may be specified on the SRS by entering an "X" with Code 1752.

1.2.42 Rated Life

Rated life may be specified on the SRS by writing in the number of hours of operation that the actuator shall be capable of with Code 1754.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.43 Clutch


A requirement that a specific type of clutch shall be used for transmitting motor torque to the output shaft may be specified on the SRS by entering an "X" with one of the following codes:

Type of Clutch	Code
Electrically controlled servo	1756
Magnetic particle	1758
Multiple plate	1760
Controlled function	1762

A requirement that the clutch shall function to limit torque for protection of the motor, associated gearing, and connected apparatus may also be specified by entering an "X" with Code 1764.

1.2.44 Motor-to-Output Shaft Gear Ratio

The motor-to-output shaft gear ratio ma be specified on the SRS by writing in both the motor gear value (number) with Code 1766 and the output shaft gear value (number) with Code 1767. For example, if the motor gear value is 1500 and the output shaft value is 1, the SRS entries for the gear ratio would be as follows:

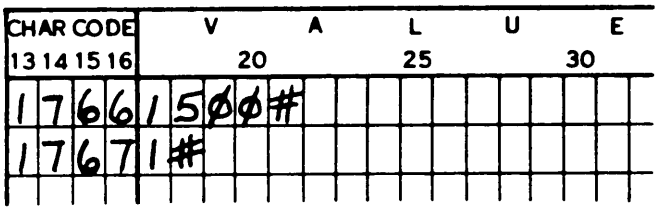

1.2.45 Output Shaft Side Loading

The maximum allowable side loads to which the output shaft may be subjected may be specified on the SRS by writing in the load value (pounds) with Code 1768.

1.2.46 Motor

Electric motor requirements may be specified on the SRS by using one of the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

a. Enter an "X" with Code 3200 to specify that the electric motor incorporated in the actuator shall meet the requirements of Specification MIL-M-8609 for Class A, DC motors. (See 1.2.9)

b. Enter an "X" with Code 3202 to specify that the electric motor incorporated in the actuator shall meet the requirements of Specification MIL-M-8609 for Class B, DC motors. (See 1.2.9)

c. Enter an "X" with Code 3204 to specify that the electric motor incorporated in the actuator shall meet the requirements 'of Specification MIL-M-7969 for Class A, AC motors. (See 1.2.9)

d. Enter an "X" with Code 3206 to specify that the electric motor incorporated in the actuator shall meet the requirements of Specification MIL-M-7969 for Class B, AC motors. (See 1.2.9)

e. If the electric motor incorporated in the actuator must meet the requirements of a specification other than MIL-M-8609 or MIL-M-7969, write in the specification number with Code 3208. (See 1.2.9)

1.2.47 Efficiency

The minimum actuator performance efficiency at the rated load may be specified on the SRS by writing in the efficiency value (percent) with Code 3210.

1.2.48 Power Consumption

The maximum power required for operation of the actuator at the rated load may be specified on the SRS by writing in the power value (watts) with Code 3212.

1.2.49 Input Power

Input power may be specified on the SRS by using one of the following:

a. Write in the voltage value (volts DC) with Code 3214.

b. Write in all of the following values: voltage (volts AC) with Code 3216, frequency (hertz) with Code 3218, and phase (number) with Code 3220.

In addition to a. or b. above, the power source category, as defined in MIL-STD-704, may be specified by writing in the category designation with Code 3222. (See 1.2.9)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.50 Electrical Connectors

A requirement that the actuator electrical connectors shall conform to the requirements of a specification may be specified on the SRS by writing in the specification number with Code 3224.

1.2.51 Electrical Wiring

A requirement that the actuator electrical wiring shall conform to the requirements of a specification may be specified on the SRS by writing in the specification number with Code 3226.

One or both of the following may also be used:

a. Enter an "X" with Code 3228 to specify that all leads shall be firmly clamped and potted.

b. Write in the wire size value (AWG) with Code 3230 to specify the wire size less than (Code 3230) AWG shall not be used.

1.2.52 Electrical Connections

A requirement that the actuator electrical connections shall conform to the requirements of a specification may be specified on the SRS by writing in the specification number with Code 3232.

1.2.53 Weight

Actuator maximum weight may be specified on the SRS either by writing in the value (ounces with Code 3234 or by writing in the value (pounds) with Code 3236.

1.2.54 Locking of Parts

A requirement that all threaded parts shall be locked by safety wiring, self-locking nuts, cotter pins, or other approved methods may be specified on the SRS by entering an "X" with Code 3240.

One or more of the following may also be used:

a. Write in the specification number with Code 3242 to specify that the self-locking nuts shall conform to that specification.

b. Enter an "X" with Code 3244 to specify that mounting screws for motor base and motor shall be drilled for lock wire.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

c. Enter an "X" with Code 3246 to specify that lock wire shall be installed in accordance with MS33540 and shall conform to MS20995. (See 1.2.9)

d. Enter an "X" with Code 3248 to specify that use of lockwashers or staking is not permitted.

1.2.55 Housing

A requirement that the actuator shall be adequately protected by a suitable housing and that the housing shall be substantial to withstand handling and shall be designed for easy access to the actuator internal components may be specified on the SRS by entering an "X" with Code 3250.

1.2.56 Output Shaft

The output shaft configuration may be specified on the SRS by selecting the type from Figure 250-02-1 and writing in the type designation (letter) with Code 3251. The dimensions required for the type selected from Figure 250-02-1 must be specified on the SRS using applicable codes from Appendix A (see 1.2.6).

1.2.57 Lubrication

Lubrication may be specified on the SRS by using one of the following:

a. Enter an "X" with Code 3252 to specify that lubricants used shall be selected and applied in such a manner as to allow the actuator to meet all requirements of this specification affected by lubrication.

b. Enter an "X" with Code 3254 to specify that the actuator shall not require lubrication during its normal service life.

c. Enter an "X" with Code 3256 to specify that the actuator shall not require lubrication during its normal service life unless disassembly is required.

d. Write in the specification number with Code 3258 to specify that the actuator lubricant shall be in accordance with that specification.

If Code 3252, 3256, or 3258 is used, one or both of the following may also be specified:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

(1) Write in the specification number with Code 3260 to specify that lubrication for gears shall conform to that specification.

(2) Write in the specification number with Code 3262 to specify that lubrication for bearings shall conform to that specification.

1.2.58 Retaining Rings

Retaining rings may be specified on the SRS by entering an "X" with Code 3264 to specify that retaining rings shall be used in accordance with MS16624 and MS16625. (See 1.2.9)

It may also be specified that retaining rings shall not be used where loss of the ring will adversely affect the operation of the actuator by entering an "X" with Code 3266.

1.2.59 Spring Pins

A requirement that spring pins shall conform to NAS561 may be specified on the SRS by entering an "X" with Code 3268.

One or both of the following may also be used:

a. Enter an "X" with Code 3270 to specify that spring pins shall be installed in a manner which will preclude any possibility of disengagement.

be Enter an "X" with Code 3272 to specify that spring pin usage shall conform to the limitation specified in MS33547. (See 1.2.9)

1.2.60 Operating Temperature

Operating temperature may be specified on the SRS by writing in the minimum value (degrees C) with Code 3274, or by writing in the maximum value (degrees C) with Code 3276, or by writing in both the minimum and the maximum values (degrees C) with Codes 3274 and 3276, respectively.

1.2.61 Storage Temperature

Storage temperature range may be specified on the SRS by writing in both the low temperature value (degrees C) with Code 3280 and the high temperature value (degrees C) with Code 3282.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.62 Operating Altitude Range

Operating altitude range may be specified on the SRS by using one of the following:

a. Write in both the low pressure value (Torr) with Code 3284 and the high pressure value (Torr) with Code 3286 to specify that the actuator shall meet the requirements of the specification over that pressure range.

b. Write in the altitude value (feet) with Code 3288 to specify that the actuator shall meet the requirements of the specification over the altitude range from sea level to (Code 3288) feet.

1.2.63 Nameplate and Product Marking

If it is desired to specify nameplate and product marking on the SRS, it is mandatory to enter an “X” with Code 3290 to specify that the actuator shall be legibly marked for identification b a firmly attached nameplate in accordance with MIL-STD-130. (See 1.2.9

One of the following may also be used:

a. Enter an “X” with Code 3292 to specify that the applicable MS drawing numbers and dash number as a suffix shall be shown on the nameplate.

b. Enter an “X” with Code 3294 to specify that the applicable drawing or manufacturers part number shall be shown on the nameplate.

1.2.64 Wiring Diagram Nameplate

If it is desired to specify on the SRS that a wiring diagram nameplate, legibly showing the internal wiring, shall be firmly attached to the actuator, it is mandatory to enter an “X” with Code 3296.

A requirement that data pertaining to the motor which is included on the motor need not be duplicated on the actuator nameplate may also be specified on the SRS by entering an “X” with Code 3298.

1.2.65 Motor Data Nameplate

A requirement that a plate legibly showing the motor internal wiring shall be firmly attached to the actuator motor may be specified on the SRS by entering an “X” with Code 3300.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.66 "Lubrication Data Nameplate

A requirement that, if lubrication of the actuator is required during its normal service life, the lubrication requirements shall be included on the nameplate, unless too extensive, and that, in such case, they shall be shown on a separately attached plate, or reference shall be made to the applicable technical order may be specified on the SRS by entering an "X" with Code 3302.

1.2.67 Interference (Conducted)

1.2.67.1 Test Methods

The test method for interference (conducted) may be specified on the SRS by using one of the following:

a. For testing in accordance with the specification referenced with Code 1006, enter an "X" with Code 2500.

b. For exceptions to the test method of the specification referenced with Code 1006, complete the sentence with Code 2502. The exceptions stated must be limited to 189 "characters, including punctuation and spaces.

c. For testing in accordance with Method CE04 of MIL-STD-462, enter an "X" with Code-2504. (See 1.2.9)

d. For testing in accordance with Method CE05 of MIL-STD-462, enter an "X" with Code 2506. (See 1.2.9)

If a Test Method Code is used, a Requirement Code must also be used. Do not use a combination of Codes 2500 and 2508 (see 1.2.69).

1 .2.67.2 Requirements

Requirements for interference (conducted) may be specified on the SRS by using one of the following:

a. For requirements in accordance with the requirements of the specification referenced with Code 1006, enter an "X" with Code 2508.

b. For exceptions to the requirements of the specification referenced with Code 1006, complete the sentence with Code 2510. The exceptions stated must be limited to 189 characters, including punctuation and spaces.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

c. For requirements in accordance with the requirements of Method CE04 of MIL-STD-461, enter an "X" with Code 2512. (See 1.2.9)

do For requirements in accordance with the requirements of Method CE05 of MIL-STD-461, enter an "X" with Code 2514. (See 1.2.9)

1.2.68 Interference (Radiated)

1.2.68.1 Test Methods

The test method for interference (radiated) may be specified on the SRS by using one of the following:

a. For testing in accordance with the specification referenced with Code 1006, enter an "X" with Code 2520.

b. For exceptions to the test method of the specification referenced with Code 1006, complete the sentence with Code 2522. The exceptions stated must be limited to 189 characters, including punctuation and spaces.

c. For testing in accordance with Method RE02 of MIL-STD-462, enter an "X" with Code 2524. (See 1.2.9)

If a Test Method Code is used, a Requirement Code must also be used. Do not uses combination of Codes 2520 and 2526 (see 1.2.69).

1.2.68.2 Requirements

Requirements for interference (radiated) may be specified on the SRS by using one of the following:

a. For requirements in accordance with the requirements of the specification referenced with Code 1006, enter an "X" with Code 2526.

b. For exceptions to the requirements of the specification referenced with Code 1006, complete the sentence with Code 2528. The exceptions stated must be limited to 189 characters, including punctuation and spaces.

c. For requirements in accordance with Method RE02 of MIL-STD-461, enter an "X" with Code 2530. (See 1.2.9)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.69 Electrical and Environmental Test Methods and Requirements

The instructions contained in this paragraph shall be followed when it is desired to make exceptions to the test methods and requirements of any of the following tests:

Altitude

High Temperature

Low Temperature

Temperature Shock

Rain

Humidity

Fungus Resistance

Salt Fog

Dust

Explosive Atmosphere

Leakage (Immersion)

Acceleration

Vibration

Acoustical Noise

Shock

Combined Temperature-Humidity-Altitude

When a code is shown for any test method, it is mandatory that a requirement code be shown. However, the first test method code and the first requirement code should not be used together, since that combination makes no exception to the specification referenced with Code 1006.

1.2.69.1 Test Methods

The test method may be specified on the SRS by using one of the following codes:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

a. If the first test method is desired, use the first test method code with an "X" to specify testing per the specification referenced with Code 1006.

b. If the second test method is desired, use the second test method code and complete the sentence with the specified exceptions, for testing per the referenced specification with exceptions. The exceptions stated must be limited to 189 characters, including punctuation and spaces.

c. If testing is to be detailed, one or more of the test method codes should be used to specify test conditions. All codes marked with an asterisk "*" must be used.

If the specification referenced with Code 1006 specifies a MIL-STD-81O test method and exceptions are to be taken, the second test method code (see b. above) should be used if the exceptions can be stated within the 189 character limitation; the third test method (see c. above) should be used if the exceptions cannot be stated within the limitation.

1.2.69.2 Requirements

If the requirements specified in the specification shown with Code 1006 are to be used, the first requirements code should be shown, with an "X" on the SRS. If exceptions to the requirements specified in the specification shown with Code 1006 are to be made, the second requirements code should be shown with exceptions written in on the SRS to complete the sentence. If the requirements are to be changes in parameter values as a result of the environmental test, one or more of the remaining requirements codes with the applicable fill-in values must be shown. When the third requirements code is shown, the requirements that there be no evidence of physical damage or degradation of performance will be included automatically.

1.2.70 Workmanship

Although MIL-STD-454, Requirements for Equipment, is often used for workmanship requirements for parts, it is too broad and not definitive enough for use in component parts.

If workmanship requirements are different than those defined in the specification shown with Code 1006, complete the sentence, "Workmanship shall be in accordance with ____", using Code 6870. Limit the write-in to 189 characters, including spaces and punctuation. If any document is referenced, it must also be entered on the SRS with a code from Appendix B.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.71 Sources

Code 6873, 6874 or Codes 7039 and/or 7040 must be used to specify that the item(s) be procured from one source (source control) or from one or more suggested sources (specification control). When a document is generated for a single item, an "X" is used on the SRS along with Code 6873 or 6874 and at least one line of the Source Table must be used (Codes 5001 and 5002) . If the generated document is for multiple "dash-number" items, Characteristic Codes from the Source Tabulation Table along with applicable write-in data must be entered on the SRS, using the rules outlined in 1.2.76. Codes 7039 and/or 7040 may be used to specify source control and/or specification control for single item(s), groups of items, or all items, if the Source Tabulation Table is used. When source control is to be specified, the dash number(s) of the item or group of items to be so controlled are entered on the SRS adjacent to Code 7039. Item(s) to be specification controlled are entered on the SRS adjacent to Code 7040. The Source Tabulation Table provides the capacity for tabulation of 50 items and up to 6 sources and manufacturer's part numbers per item. The Source Tabulation Table may be found in the Appendices, located at the end of Section 1.2. The following description and illustration is intended to show the proper usage of the Source Tabulation Table.

The first Characteristic Code from the Source Tabulation Table, Code 9051, is entered on the SRS along with the first dash-number, designated as "01" or a "block" of dash numbers; for example "01 thru 04". Block dash numbers may be specified when sources are the same, when no manufacturer's part numbers have been established, or when manufacturer's part numbers are identical. Dash number "02" or "02 thru 04", as applicable, is entered on the SRS adjacent to Code 9052 and so on, using as many first column Source Tabulation Table Characteristic Codes as necessary to specify the required dash numbers. Codes 9151 through 9156, located in the third column of the table, are used to specify the manufacturer's FSCM number(s) (Cataloging Handbook H4-1) for the first dash-number or "block" of dash-numbered items listed. The manufacturer's name and address may also be added after the FSCM number. If the name and address is inserted, it need only be used with the first entry of the FSCM number. Codes 9451 through 9456 are used to specify the manufacturer's part number for the first dash-number or "block" of dash-numbered items listed. The part number (when known) must be exactly as shown by the manufacturer, including all dashes, punctuation, and spaces. All insertions and write-ins must be limited to 189 characters (including spaces between words, punctuation marks, and "pound sign") for each Characteristic Code.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

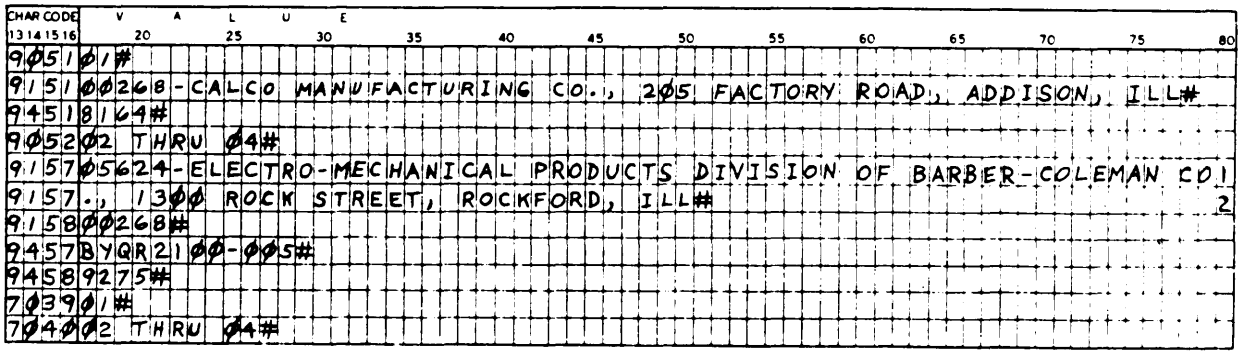

1.2.72 Material and Process Substitution

If it is desired to specify the requirement for material and process substitution shown with Code 6949 in the SRL, enter Code 6949 on the SRS followed by an "X".

1.2.73 Supersession Data

When a document is being requested to supersede a purchase description or drawing, the superseded number and its date should be entered with Codes 6871 and 6872. The number shall be self-descriptive, such as, "Purchase Description PD-60425" or "Drawing 10059004" and the date should be in military format; i.e., 3 July 1968.

1.2.74 Test Data and Test Methods

Recording Group A, B, and C test data is not customary. Most component manufacturers have established "go-no go" test equipment for these inspection tests. Recording of data is usually "Special Handling" and results in increased costs. If it is desired that data be recorded, an "X" shall be entered after the applicable code. The specification will then specify recording the data and require that it be available upon request.

Some manufacturers have developed individual test methods which yield results equivalent to those results obtainable by the customary military test. Should it be desired to permit alternate test methods in lieu of specified methods, place an "X" on the SRS with Code 1561. The supplier must then request approval to use alternate test methods and must demonstrate that the alternate methods do not relax the specified requirements. If strict adherence to the test methods specified is desired, this can be obtained by the use of an "X" with Code 1560. One must be selected.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.75 Specification Requirements, Appendices and SRS

Preparation of an acceptable document by the computer is dependent upon two major factors. These are (1) correct selection of the appropriate Specification Requirements and their applicable codes, and (2) proper application of the requirements and codes onto the SRS form. The above is particularly important in the use of the various appendices.

1.2.76 Specification Requirements Sheet (SRS) Form

A form has been prepared to expedite and ease the preparation and submission of the requirements and parameters necessary for the computer to complete the process of "writing" a procurement document. It is important that the first 12 spaces be completed on each sheet. The next 4 numbered spaces (13, 14, 15, and 16) will contain the required Characteristic Codes; and the following 63 spaces (17 through 79) will be used for Characteristic Values. Each value must be ended by the use of the pound sign (#). The requester's complete name, mailing address, and phone number must be at the top of each SRS submitted. If microfilm query is not completed, a hard copy will be furnished. Revision block is only to be used when a revision to an existing AEDPS is desired, and then only by the original requester or by a bonafide registered user.

Two removable fold-out SRS forms are furnished following the Figures for each Generic Family of items. These forms are to be locally reproduced for use in submitting requests for computer generated Military Specification Exceptions. The first of the forms has the Characteristic Names and Characteristic Codes that are mandatory for each Generic Family. Where mandatory requirements are not specified on the form, any of the other Characteristic Codes in any of the Requirements, Tables, or Appendices can be used. The Characteristic Names are not required, but may be used if desired.

A standard 80 column keypunch form may be used, provided the first 12 spaces on each line contain the Specification Title Code and Serial Number.

Caution: Where write-in capability is utilized, the absolute limit is 189 characters for each code, including spaces and punctuation. When the write-in exceeds 63 characters, it should continue into the next line. It is important to continue through space 79 even if it breaks a word, and continue in space 17 on the second line. If more than one line is used, each line must be numbered in space 80; i.e., 1, 2, etc., with the pound sign (#) at the end of the value on the last line. If only one line is used, numbering is not required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.77 Searching for Existing Documents

1.2.77.1 General Requirements

Before a request for a document is submitted, it is generally recommended that a search be initiated, to determine if a document already exists in the system that will adequately fulfill the requirement. This is particularly desirable when a document is desired for an item for which a wide range in one of the parameters could be acceptable.

1.2.77.2 Instructions

When a search only is desired, the SRS must be marked in large letters at the top of each sheet with the words “SEARCH ONLY” (see example in MIL-STD-35). The system will then only look for Characteristic Codes furnished and will ignore all others. For example, if Code 1011 specified “1.00”, the system will list all documents that specify this minimum dimension, or if Code 1011 specified “1.00 Ù 2.50”, the system will list all documents specifying a minimum dimension of 1 inch through 2.5 inches, providing all other characteristic values specified also match.

This same philosophy applies to other characteristics; for example, if a diameter value of “3.50 Ù 3.90” is specified and no length is supplied, the system would list all documents having a diameter of 3.50 through 3.90 and could show an unlimited number of actuators, if other dimensions or limits are not specified.

Note: The symbol “ Ù ” is used between numeric values whenever a range of values is desired. The asterisk “*” on the basic SRS should be ignored by the requester for “SEARCH ONLY” usage.

Custodians:
Army-MI

User Activity:
Army-MU

Review Activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SL
Army-WC

Preparing Activity:
Army-MI
(Project EDS-A024-13)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF. PARA,	CHARACTERISTIC NAME	CODE
1.2.12	*Date	1003
1.2.13	*FSCM of Requester	1004
1.2.14	*Prime Contract Number	1005
1.2.15	*Applicable General Specification from Specification Title Index	1006
1.2.17	*Item Application	1008
1.2.18.	*Drawing Figure Number	1009
1.2.19	*Dimensions (Enter on SRS applicable codes, legends, and values from Appendix A)	
1.2.20	*Design Characteristics (Select one or more and enter value)	
1.2.20.1	Starting current	
	Minimum (amps)	1562
	Maximum (amps)	1564
	or	
	Minimum (milliamps)	1566
	Maximum (milliamps)	1568
1.2.20.2	Operating current	
	Minimum (amps)	1570
	Maximum (amps)	1572
	or	

“INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.20.2 Cont.	Minimum (milliamps)	1574
	Maximum (milliamps)	1576
1.2.20.3	Acceleration (Select one and enter value)	
	Time required to reach rated speed with maximum operating load (seconds)	1580
	or	
	Time required to reach rated speed with rated load (seconds)	1582
1.2.20.4	Operating speed with load (Select rated load or max operating load)	
	Rated load (Select one)	
	Minimum speed (RPM)	1584
	*Maximum speed (RPM)	1586
	or	
	Nominal speed (RPM)	1588
	or	
	Time (seconds)	1590
	*Per rotational movement (deg of arc)	1592
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.20.4 Cont.	Maximum operating load (Select one)	
	Minimum speed (RPM)	1594
	*Maximum speed (RPM)	1596
	or	
	Nominal speed (RPM)	1598
	or	
	Time (seconds)	1600
	*Per rotational movement (deg of arc)	1602
1.2.20.5	Operating speed without load (Select one)	
	Minimum speed (RPM)	1604
	*Maximum speed (RPM)	1606
	or	
	Nominal speed (RPM)	1608
	or	
	Time (seconds)	1610
	*Per rotational movement (deg " of arc)	1612

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.20.6	Breakaway torque	
	Minimum torque (pound-inches)	1614
	Maximum torque (pound-inches)	1616
	or	
	Nominal torque (pound-inches)	1618
1.2.20.7	Overtravel	
	Shall not exceed	
	Deg of arc	1620
	Minutes of arc	1622
1.2.9	*Enter on SRS all referenced document numbers with applicable codes from Appendix B.	
	Note: If the Requirements and Quality Assurance Provisions in the specification shown with Code 1006 meet the users requirements, Characteristic Codes without an asterisk "*" in the far left edge should not be used. The generated document will then specify all of the requirements and tests of the referenced specification.	
1.2.1.1	Tabulation (See referenced paragraph for Tabulation Table usage)	
1.2.21	Materials (Enter on SRS applicable codes and. values from Table I)	
1.2.22	Finishes (Enter on SRS applicable codes and values from Table II	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF. PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.23	Travel (Select one)	
	Clockwise direction (deg)	1624
	*Counterclockwise direction (deg)	1626
	or	
	Clockwise direction only (deg)	1628
	or	
	Counterclockwise direction only (deg)	1630
	or	
	In either direction (deg)	1632
	Clockwise and counterclockwise direction determined when facing output shaft end	1634
1.2.24	Operating Torque	
	Minimum torque (pound-inches)	1636
	Maximum torque (pound-inches)	1638
	or	
	Nominal torque (pound-inches)	1640
1.2.25	Stall Torque	
	Minimum torque (pound-inches)	1642
	Maximum torque (pound-inches)	1644
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.25 Cont.	Nominal torque (pound-inches)	1646
1.2.26	Holding torque (pound-inches)	1648
1.2.27	Rated Load (pounds)	1650
1.2.28	Maximum Operating Load (pounds)	1652
1.2.29	Stall Load (pounds)	1654
1.2.30	Output Shaft Revolutions	
	In clockwise direction (revolutions)	1656
	*In counterclockwise direction (revolutions)	1658
	or	
	In clockwise direction only (revolutions)	1660
	or	
	In counterclockwise direction only (revolutions)	1662
	or	
	No limitation on revolutions in either direction	1664
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF. PARA,	CHARACTERISTIC NAME	CODE
1.2.30 Cont.	No limitation on revolutions in clockwise direction	1666
	or	
	No limitation on revolutions in counterclockwise direction	1668
1.2.31	Backlash	
	Shall not exceed (Select one)	
	With rated load (deg)	1670
	or	
	Without load (deg)	1672
1.2.32	Coast	
	Maximum coast at rated load (deg)	1674
	Maximum coast at no-load (deg)	1676
	or	
	Maximum coast at maximum operating load (deg)	1678

l INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.33	Repeatability	
	Repeatability of output shaft position with constant input power shall be within	
	Degrees of arc	1680
	Minutes of arc	1682
1.2.34	Travel Limit Stops (Select one)	
	Shall stop shaft rotation at the following positions (Select as required and write in deg of positions)	
	First stop (deg)	1684
	Second stop (deg)	1686
	Third stop (deg)	1688
	Fourth stop (deg)	1690
	Fifth stop (deg)	1692
	Sixth stop (deg)	1694
	At end of travel	1696
	or	
	Shall stop shaft rotation at selected positions in either direction (write in quantity of positions required)	1698
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF. PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.34 Cont.	Shall incorporate stops to permit stopping of shaft at any infinite number of positions	1700
	Description of travel limit stops (Select one)	
	Cam operated limit switches	1702
	or	
	Externally adjustable limit switches	1704
	or	
	Internally adjustable limit switches	1706
	or	
	Stops accomplished by use of potentiometer	1708
	or	
	Nonjamming mechanical	1710
1.2.35	Brakes	
	Braking accomplished by (Select one)	
	Electromechanical brake	1712
	or	
	Dynamic brake	1714
	or	
	Friction brake	1716

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF. PARA,	CHARACTERISTIC NAME	CODE
1.2.36	Operating Speed Adjustments	
	Shall be adjustable from	
	Low RPM	1718
	*High RPM	1720
1.2.37	Reversibility (Select one)	
	After being de-energized, the shaft shall be returned to original position by a spring or other suitable device	1722
	or	
	Actuator stopped and electrically reversed at any point	1724
	Maximum time required to reverse from full speed in one direction to full speed in opposite direction (seconds)	1726
1.2.38	Position Transmitters	
	Integrally installed in actuator	1728
	Readily accessible and easily removed for maintenance and replacement	1730
	Shall conform to Specification ___.	1732
1.2.39	Thermal Protection	
	Shall be provided integrally to prevent damage due to electrical overloads or exceeding duty cycle	1734

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.40	Duty Cycle (Select one)	
	Shall be capable of continuous duty under any adverse combinations of maximum rated load and electrical and environmental parameters specified at standard conditions	1736
	or	
	With rated load	
	On (minutes) .	1738
	*Off (minutes)	1740
	or	
	On (seconds)	1742
	*Off (seconds)	1744
	or	
	On (seconds)	1746
	*Off (minutes)	1748
	Temperature (deg C)	1750
1.2.41	Overriding Loads	
	Shall not cause sufficient overspeeding to cause failure or damage. Shall not increase stopping distance beyond that specified	1752

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.42	Rated Life	
	Rated operation time (hours)	1754
1.2.43	clutch	
	Shall transmit motor torque to output shaft and be of the following type (Select one)	
	Electrically controlled servo type	1756
	or	
	Magnetic particle type	1758
	or	
	Multiple plate type	1760
	or	
	Controlled friction type	1762
	Clutch shall function to limit torque for protection of motor, associated gearing, and connected apparatus	1764
1.2.44	Motor-to-Output Shaft Gear Ratio	
	Ratio shall be	
	Motor gear	1766
	*To output shaft gear	1767

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.45	Output Shaft Side Loading	
	Maximum side load output shaft may be subjected to (pounds)	1768
1.2.46	Motor (Select one)	
	Meets requirements for MIL-M-8609 Class A, DC motor	3200
	or	
	Meets requirements for MIL-M-8609 Class B, DC motor	3202
	or	
	Meets requirements for MIL-M-7969 Class A, AC motor	3204
	or	
	Meets requirements for MIL-M-7969 Class B, AC motor	3206
	or	
	Meets requirements of Specification ___.	3208
1.2.47	Efficiency	
	Minimum performance efficiency at rated load (percent)	3210
1.2.48	Power Consumption	
	Power required for operation at rated load shall not exceed (watts)	3212

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC NAME	CODE
1.2.49	Input Power (Select one)	
	Voltage (volts DC)	3214
	or	
	Voltage (volts AC)	3216
	*Frequency (hertz)	3218
	*Phase	3220
	Category (per MIL-STD-704)	3222
1.2.50	Electrical Connectors	
	Conforms to requirements of Specification ___.	3224
1.2.51	Electrical Wiring	
	Conforms to requirements of Specification ___.	3226
	All leads clamped and potted	3228
	Minimum wire size (AWG)	3230
1.2.52	Electrical Connections	
	Conforms to requirements of Specification ___.	3232

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF. PARA,	CHARACTERISTIC NAME	CODE
1.2.53	Weight (Select one)	
	Maximum (ounces)	3234
	or	
	Maximum (pounds)	3236
1.2.54	Locking of Parts	
	Threaded parts shall be locked by safety wiring, cotter pins, self-locking nuts, or other approved method	3240
	Self-locking nuts shall conform to Specification ___.	3242
	Mounting screws for motor base and motor shall be drilled for lock wire	3244
	Lockwire shall be installed per MS33540 and conform to MS20995	3246
	Lockwashers or staking is not permitted	3248
1.2.55	Housing	
	Housing adequately protects actuator, withstands handling, and provides easy access to internal components	3250
1.2.56	Output Shaft (Select type from Figure 250-02-l and enter on SRS applicable codes, legends, and values from Appendix A)	3251

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.57	Lubrication (Select one)	
	Selected and applied to allow actuator to meet all requirements	3252
	or	
	Shall not require lubrication during normal service life	3254
	or	
	Shall not require lubrication during normal service life unless disassembly is required	3256
	or	
	Actuator lubricant shall be in accordance with Specification ___.	3258
	Gear lubricant shall conform to Specification ___.	3260
	Bearing lubricant shall conform to Specification ___.	3262
1.2.58	Retaining Rings	
	Shall be used in accordance with Standards MS16624 and MS16625	3264
	Shall not be used where loss of ring would adversely affect actuator operation	3266

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF. PARA,	CHARACTERISTIC NAME	CODE
1.2.59	Spring Pins	
	Shall conform to NAS561	3268
	Installed to preclude possibility of disengagement	3270
	Use shall conform to limitations specified in Standard MS33547 (See 1.2.9)	3272
1.2.60	Operating Temperature	
	Minimum temperature (deg C)	3274
	Maximum temperature (deg C)	3276
1.2.61	Storage temperature	
	Low temperature (deg C)	3280
	*High temperature (deg C)	3282
1.2.62	Operating Altitude Range (Select one)	
	Low pressure (Torr)	3284
	*High pressure (Torr)	3286
	or	
	Sea level to altitude (feet)	3288

l INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.63	Nameplate and Product Marking	
	*Marked with attached nameplate per MIL-STD-130	3290
	MS drawing number and dash number shown on nameplate	3292
	or	
	Drawing number or manufacturer's part number shown on nameplate	3294
1.2.64	Wiring Diagram Nameplate	
	*Shall be attached and show internal wiring	3296
	Shall not duplicate wiring on motor nameplate	3298
1.2.65	Motor Data Nameplate	
	Shall be attached to motor and show motor internal wiring	3300
1.2.66	Lubrication Data Nameplate	
	Lubrication requirements shall be shown on nameplate unless they are too extensive. If too extensive, either provide individual nameplate or referenced technical order or standard	3302

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC NAME	CODE
1.2.67	Interference (Conducted)	
1.2.67.1	Test Procedure (Select one if required)	
	Test per Specification shown with . Code 1006	2500
	or .	
	Test per Specification shown with Code 1006 except .	2502
	or	
	Test per Method CE04 of MIL-STD-462	2504
	or	
	Test per Method CE05 of MIL-STD-462	2506
1.2.67.2	Requirement (Select one) (Mandatory if either Code 2500, 2502, 2504, or 2506 is selected)	
	Requirements per Specification shown with Code 1006	2508
	or	
	Requirements per Specification shown with Code 1006 except .	2510
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC NAME	CODE
1.2.67.2 Cont.	Requirements as follows:	
	Requirements per Method CE04 of MIL-STD-461	2512
	or	
	Requirements per Method CE05 of MIL-STD-461	2514
1.2.68	Interference (Radiated)	
1.2.68.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	2520
	or	
	Test per Specification shown with Code 1006 except ___.	2522
	or	
	Test per Method RE02 of MIL-STD-462	2524
1.2.68.2	Requirement (Select one) (Mandatory if either Code 2520, 2522, or 2524 is selected)	
	Requirements per Specification shown with Code 1006	2526
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF. PARA,	CHARACTERISTIC NAME	CODE
1.2.68.2 Cont.	Requirements per Specification shown with Code 1006 except .	2528
	or	
	Requirements as follows:	
	Requirements per Method RE02 of MIL-STD-461	2530
1.2.69	Altitude	
1.2.69.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	1780
	or	
	Test per Specification shown with Code 1006 except .	1782
	or	
	Test per Method 500 of MIL-STD-810	
	*Test procedure number (Select one)	
	I	1784
	or	
	II	1786

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.69.1 Cont.	Measurements prior to test (Select one or more)	
	Starting current	1788
	Operating current	1790
	Acceleration	1792
	Operating speed with load	1794
	Operating speed without load	1796
	Breakaway torque	1798
	Overtravel	1799
	*Actuator operating time with chamber at reduced pressure (minutes)	1800
	*Actuator operating time with chamber at standard ambient conditions (minutes)	1802
	Measurements during test (Select one or more)	
	Starting current	1804
	Operating current	1806
	Acceleration	1808
	Operating speed with load	1810
	Operating speed without load	1812

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF. PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.69.1 Cont.	Breakaway torque	1814
	Overtravel	1815
	Measurements after test (Select one or more)	
	Starting current	1816
	Operating current	1818
	Acceleration	1820
	Operating speed with load	1822
	Operating speed without load	1824
	Breakaway torque	1826
	Overtravel	1827
	Rate of pressure change (Torr per second)	1828
	For test procedure 11 only	
	*Chamber internal pressure reduced to (Torr)	1830
	Chamber internal temperature reduced to (de C) (if other than -54 deg C	1832

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF. PARA,	CHARACTERISTIC NAME	CODE
1.2.69.2	Requirement (Select one) (Mandatory if either Code 1780, 1782, 1784, or 1786 is selected)	
	Requirements per Specification shown with Code 1006	1834
	or	
	Requirements per Specification shown with Code 1006 except .	1836
	or	
	Requirements as follows:	
	*No evidence of physical damage or degradation of performance	1837
	Pretest requirements per Design Characteristics	1838
	Requirements during test per Design Characteristics	1840
	Requirements after test per Design Characteristics	1842
1.2.69	High Temperature	
1.2.69.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	1850
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.69.1 Cont.	Test per Specification shown with Code 1006 except .	1852
	or	
	Test per Method 501 of MIL-STD-810	
	*Test procedure number (Select one)	
	I	1855
	or	
	II	1856
	Measurements prior to test (Select one or more)	
	Starting current	1858
	Operating current	1860
	Acceleration	1862
	Operating speed with load	1864
	Operating speed without load	1866
	Breakaway torque	1868
	Overtravel	1869
	Measurements during test (Select one or more)	
	Starting current	1872
	Operating current	1874

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.69.1 Cont.	Acceleration	1876
	Operating speed with load	1878
	Operating speed without load	1880
	Breakaway torque	1882
	Overtravel	1883
	Operating time at elevated temperature (minutes)	1884
	Operating time at standard ambient conditions (minutes)	1886
	Measurements after test (Select one or more)	
	Starting current	1888
	Operating current	1890
	Acceleration	1892
	Operating speed with load	1894
	Operating speed without load	1896
	Breakaway torque	1898
	Overtravel	1899
	For test procedure I only	
	Internal chamber temperature (deg C) (if other than 71 deg C)	1900

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.69.2	Requirement (Select one) (Mandatory if either Code 1850, 1852, 1855, or 1856 is selected)	
	Requirements per Specification shown with Code 1006	1902
	or	
	Requirements per Specification shown with Code 1006 except .	1904
	or	
	Requirements as follows:	
	*No evidence of physical damage or degradation of performance	1905
	Pretest requirements per Design Characteristics	1906
	Requirements during test per Design Characteristics	1908
	Requirements after test per Design Characteristics	1910
1.2.69	Low Temperature	
1.2.69.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	1920
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.69.1 Cont.	Test per Specification shown with Code 1006 except .	1922
	or	
	Test per Method 502 of MIL-STD-810	1923
	Internal chamber storage temperature (deg C)	1924
	Measurements prior to test (Select one or more)	
	Starting current	1926
	Operating current	1928
	Acceleration	1930
	Operating speed with load	1932
	Operating speed without load	1934
	Breakaway torque	1936
	Overtravel	1937
	Internal chamber storage time (hours)	1938
	Measurements during test (Select one or more)	
	Starting current	1942
	Operating current	1944
	Acceleration	1946

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.69.1 Cont.	Operating speed with load	1948
	Operating speed without load	1950
	Breakaway torque	1952
	Overtravel	1953
	Actuator operating time at lowest operating temperature (minutes)	1954
	Actuator operating time at standard ambient conditions (minutes)	1956
	Measurements after test (Select. one or more)	
	Starting current	1958
	Operating current	1960
	Acceleration	1962
	Operating speed with load	1964
	Operating speed without load	1966
	Breakaway torque	1968
	Overtravel	1969
	Chamber air velocity (feet per minute)	1970

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC NAME	CODE
1.2.69.2	Requirement (Select one) (Mandatory if either Code 1920, 1922, or 1923 is selected)	
	Requirements per Specification shown with Code 1006	1972
	or	
	Requirements per Specification shown with Code 1006 except _____.	1974
	or	
	Requirements as follows:	
	*No evidence of physical damage or degradation of performance	1975
	Pretest requirements per Design Characteristics	1976
	Requirements during test per Design Characteristics	1978
	Requirements after test per Design Characteristics	1980
1.2.69	Temperature Shock	
1.2.69.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	2000
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.69.1 Cont.	Test per Specification shown with Code 1006 except .	2002
	or	
	Test per Method 503 of MIL-STD-810	2004
	Measurements prior to test (Select one or more)	
	Starting current	2006
	Operating current	2008
	Acceleration	2010
	Operating speed with load	2012
	Operating speed without load	2014
	Breakaway torque	2016
	Overtravel	2017
	Measurements after test (Select one or more)	
	Starting current	2018
	Operating current	2020
	Acceleration	2022
	Operating speed with load	2024
	Operating speed without load	2026

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC NAME	CODE
1.2.69.1 Cont.	Breakaway torque	2028
	Overtravel	2029
1.2.69.2	Requirement (Select one) (Mandatory if either Code 2000, 2002, or 2004 is selected)	
	Requirements per Specification shown with Code 1006	2030
	or	
	Requirements per Specification shown with Code 1006 except _____.	2032
	or	
	Requirements as follows:	
	*No evidence of physical damage or degradation of performance	2033
	Pretest requirements per Design Characteristics	2034
	Requirements after test per Design Characteristics	2036
1.2.69	Rain	
1.2.69.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	2040
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF. PARA,	CHARACTERISTIC NAME	CODE
1.2.69.1 Cont.	Test per Specification shown with Code 1006 except .	2042
	or	
	Test per Method 506 of MIL-STD-810	2043
	Measurements prior to test (Select one or more)	
	Starting current	2046
	Operating current	2048
	Acceleration	2050
	Operating speed with load	2052
	Operating speed without load	2054
	Breakaway torque	2056
	Overtravel	2057
	Measurements during test (Select one or more)	
	Starting current	2070
	Operating current	2072
	Acceleration	2074
	Operating speed with load	2076
	Operating speed without load	2078

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF. PARA,	CHARACTERISTIC NAME	CODE
1.2.69.1 Cont.	Breakaway torque	2080
	Overtravel	2081
	Actuator operating time during test (minutes)	2082
	Measurements after test (Select one or more)	
	Starting current	2058
	Operating current	2060
	Acceleration	2062
	Operating speed with load	2064
	Operating speed without load	2066
	Breakaway torque	2068
	Overtravel	2069
1.2.69.2	Requirement (Select one) (Mandatory if either Code 2040, 2042, or 2043 is selected)	
	Requirements per Specification shown with Code 1006	2084
	or	
	Requirements per Specification shown with Code 1006 except .	2086
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA.	CHARACTERISTIC NAME	CODE
1.2.69.2 Cont.	Requirements as follows:	
	*No evidence of physical damage or degradation of performance	2087
	Pretest requirements per Design Characteristics	2088
	Post test requirements per Design Characteristics	2090
	Requirements during test per Design Characteristics	2092
1.2.69	Humidity	
1.2.69.1	Test Procedure (Select one if required.)	
	Test per Specification shown with Code 1006	2600
	or	
	Test per Specification shown with Code 1006 except ___.	2602
	or	
	Test per Method 507 of MIL-STD-810	
	*Test procedure number (Select one)	
	I	2604
	or	
	II	2606
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC NAME	CODE
1.2.69.1 Cont.	III	2608
	or	
	IV	2610
	or	
	V	2612
	Measurements prior to test (Select one or more)	
	Starting current	2614
	Operating current	2616
	Acceleration	2618
	Operating speed with load	2620
	Operating speed without load	2622
	Breakaway torque	2624
	Overtravel	2625
	Measurements during test (Select one or more)	
	Starting current	2626
	Operating current	2628
	Acceleration	2630

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.69.1 Cont.	Operating speed with load	2632
	Operating speed without load	2634
	Breakaway torque	2636
	Overtravel	2637
	Measurements after test (Select one or more)	
	Starting current	2638
	Operating current	2640
	Acceleration	2642
	Operating speed with load	2644
	Operating speed without load	2646
	Breakaway torque	2648
	Overtravel	2649
	For test procedure I only	
	Prior to test, actuator exposed to	
	*Temperature (deg C)	2650
	*Period (hours)	2652

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.69.1 Cont.	For test procedures II and III only	
	Measurements during five 48-hour cycles (Select one	
	At midpoint of each cycle	2654
	or	
	At end of each cycle	2656
	For test procedure III only	
	Measurements shall be made at end of each 24-hour period during 480-hour exposure period	2658
	For test procedure V only	
	Measurements (Select one)	
	After each cycle	2660
	or	
	After completion of all cycles	2662
	Number of cycles shall be ___. (If other than 20 cycles)	2664
	Method for determining purity of water shall be _____. (If other than specified)	2666

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.69.2	Requirement (Select one) (Mandatory if either Code 2600, 2602, 2604, 2606, 2608, 2610, or 2612 is selected)	
	Requirements per Specification , shown with Code 1006	2668
	or	
	Requirements per Specification shown with Code 1006 except .	2670
	or	
	Requirements as follows:	
	*No evidence of physical damage or degradation of performance	2672
	Pretest requirements per Design Characteristics	2674
	Requirements during test per Design Characteristics	2676
	Requirements after test per Design Characteristics	2670
1.2.69	Fungus Resistance	
1.2.69.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	2700
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.69.1 Cont.	Test per Specification shown with Code 1006 except ___.	2702
	or	
	Test per Method 508 of MIL-STD-810	2703
	Measurements prior to test (Select one or more)	
	Starting current	2704
	Operating current	2706
	Acceleration	2708
	Operating speed with load	2710
	Operating speed without load	2712
	Breakaway torque	2714
	Overtravel	2715
	Test period (days) (if other than 28 days)	2716
	Measurements after test (Select one or more)	
	Starting current	2718
	Operating current	2720
	Acceleration	2722

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF. PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.69.1 Cont.	Operating speed with load	2724
	Operating speed without load	2726
	Breakaway torque	2728
	Overtravel	2729
1.2.69.2	Requirement (Select one) (Mandatory if either Code 2700, 2702, or 2703 is selected)	
	Requirements per Specification shown with Code 1006	2730
	or	
	Requirements per Specification shown with Code 1006 except .	2732
	or	
	Requirements as follows:	
	*No fungus on electrical wiring or parts made of inorganic material where damage or degradation of performance might result	2734
	Pretest requirements per Design Characteristics	2736
	Post test requirements per Design Characteristics	2738

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF. PARA,	CHARACTERISTIC NAME	CODE
1.2.69	Salt Fog	
1.2.69.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	2750
	or	
	Test per Specification shown with Code 1006 except ___.	2752
	or	
	Test per Method 509 of MIL-STD-810	2754
	Measurements prior to test (Select one or more)	
	Starting current	2756
	Operating current	2758
	Acceleration	2760
	Operating speed with load	2762
	Operating speed without load	2763
	Breakaway torque	2764
	Overtravel	2765

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.69.1 Cont.	Measurements after 24 hours of salt fog exposure (Select one or more)	
	Starting current	2766
	Operating current	2768
	Acceleration	2770
	Operating speed with load	2772
	Operating speed without load	2774
	Breakaway torque	2776
	Overtravel	2777
	Measurements after test (Select one or more)	
	Starting current	2778
	Operating current	2780
	Acceleration	2782
	Operating speed with load	2784
	Operating speed without load	2786
	Breakaway torque	2788
	Overtravel	2789

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.69.1 Cont.	Salt solution (percent) (if other than 5 percent)	2790
	Special mounting shall be (If other than normal mean)	2792
	Exposure time (hours) (if other than 48 hours)	2794
	Drying period (hours) (if other than 48 hours)	2796
1.2.69.2	Requirement (Select one) (Mandatory if either Code 2750, 2752, or 2754 is selected)	
	Requirements per Specification shown with Code 1006	2798
	or	
	Requirements per Specification shown with Code 1006 except ____	2800
	or	
	Requirements as follows:	
	*No evidence of physical damage or degradation of performance	2802
	Pretest requirements per Design Characteristics	2804

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.69.2 Cont.	Requirements after 24 hours salt fog exposure per Design Characteristics	2806
	Requirements after test per Design Characteristics	2808
1.2.69	Dust	
1.2.69.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	2820
	or	
	Test per Specification shown with Code 1006 except _____.	2822
	or	
	Test per Method 510 of MIL-STD-810	2824
	Measurements prior to test (Select one or more)	
	Starting current	2826
	Operating current	2828
	Acceleration	2830
	Operating speed with load	2832
	Operating speed without load	2834
	Breakaway torque	2836
	Overtravel	2837

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.69.1 Cont.	Measurements during test (Select one or more)	
	Starting current	2838
	Operating current	2840
	Acceleration	2842
	Operating speed with load	2844
	Operating speed without load	2846
	Breakaway torque	2848
	Overtravel	2849
	Measurements after test (Select one or more)	
	Starting current	2850
	Operating current	2852
	Acceleration	2854
	Operating speed with load	2856
	Operating speed without load	2857
	Breakaway torque	2858
	Overtravel	2859
	Change actuator orientation to expose all critical or vulnerable parts to dust stream	2860

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC NAME	CODE
1.2.69.1 Cont.	Actuator operation during test (minutes)	2861
	A second 6-hour test at 63 deg C shall be performed immediately after reaching stabilization in Step 2	2862
1.2.69.2	Requirement (Select one) (Mandatory if either Code 2820, 2822, or 2824 is selected)	
	Requirements per Specification shown with Code 1006	2864
	or	
	Requirements per Specification shown with Code 1006 except .	2866
	or	
	Requirements as follows:	
	*No evidence of physical damage or degradation of performance	2868
	Pretest requirements "per Design Characteristics	2870
	Requirements during test per Design Characteristics	2872
	Requirements after test per Design Characteristics	2874

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF. PARA,	CHARACTERISTIC NAME	CODE
1.2.69	Explosive Atmosphere	
1.2.69.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	2240
	or	
	Test per Specification shown with Code 1006 except ___.	2242
	or	
	Test per Method 511 of MIL-STD-810	
	*Test procedure (Select one)	
	I	2246
	or	
	II	2248
	or	
	III	2250
	Measurements prior to test (Select one or more)	
	Starting current	2252
	Operating current	2254
	Acceleration	2256
	Operating speed with load	2258

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF. PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.69.1 Cont.	Operating speed without load	2260
	Breakaway torque	2262
	Overtravel	2263
	For test procedure I only	
	Actuator load during test (Select one)	
	Pounds	2264
	or	
	Rated load	2268
	Test chamber ambient temperature (deg C) (if lower than 71 deg C)	2270
1.2.69.2	Requirement (Select one) (Mandatory if either Code 2240, 2242, 2246, 2248, or 2250 is selected)	
	Requirements per Specification shown with Code 1006	2272
	or	
	Requirements per Specification shown with Code 1006 except _____.	2274
	or	
	Requirements as follows:	
	*No explosion in test chamber	2276
	Pretest requirements per Design Characteristics	2278

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35D FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC NAME	CODE
1.2.69	Leakage (Immersion)	
1.2.69.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	2880
	or	
	Test per Specification shown with Code 1006 except ___.	2882
	or	
	Test per Method 512 of MIL-STD-810	
	*Test procedure number (Select one)	
	I	2884
	or	
	II	2886
	Measurements prior to test (Select one or more)	
	Starting current	2888
	Operating current	2890
	Acceleration	2892
	Operating speed with load	2894
	Operating speed without load	2896
	Breakaway torque	2898
	Overtravel	2899

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF. PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.69.1 Cont.	Actuator operation during test (minutes)	2900
	Actuator condition (Select one)	
	Transit	2902
	or	
	Operational	2904
	Measurements during test (Select one or more)	
	Starting current	2906
	Operating current	2908
	Acceleration	2910
	Operating speed with load	2912
	Operating speed without load	2914
	Breakaway torque	2916
	Overtravel	2917
	Measurements after test (Select one or more)	
	Starting current	2918
	Operating current	2920
	Acceleration	2922
	Operating speed with load	2924
	Operating speed without load	2926

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.69.1 Cont.	Breakaway torque	2928
	Overtravel	2929
1.2.69.2	Requirement (Select one) (Mandatory if either Code 2880, 2882, 2884, or 2886 is selected)	
	Requirements per Specification shown with Code 1006	2930
	or	
	Requirements per Specification shown with Code 1006 except _____.	2932
	or	
	Requirements as follows:	
	*Failure criteria (Select one)	
	No evidence of water leakage	2934
	or	
	No leakage as evidenced by bubbles	2936
	Pretest requirements per Design Characteristics	2938
	Requirements during test per Design Characteristics	2940
	Requirements after test per Design Characteristics	2942

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF. PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.69	Acceleration	
1.2.69.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	2330
	or	
	Test per Specification shown with Code 1006 except _____.	2332
	or	
	Test per Method 513 of MIL-STD-810	2334
	Measurements prior to test (Select one or more)	
	Starting current	2336
	Operating current	2338
	Acceleration	2340
	Operating speed with load	2342
	Operating speed without load	2344
	Breakaway torque	2346
	Overtravel	2347
	*Test level (g's)	2348
	Test time each direction (minutes)	2350

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.69.1 Cont.	Test procedure number (Select one, if both procedures not required)	
	I	2378
	or	
	II	2380
	Measurements during test (Select one or more)	
	Starting current	2352
	Operating current	2354
	Acceleration	2356
	Operating speed with load	2358
	Operating speed without load	2360
	Breakaway torque	2362
	Overtravel	2363
	Actuator operation time each direction (minutes)	2364
	Measurements after test (Select one or more)	
	Starting current	2366
	Operating current	2368
	Acceleration	2370

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.69.1 . Cont.	Operating speed with load	2372
	Operating speed without load	2374
	Breakaway torque	2376
	Overtravel	2377
1.2.69.2	Requirement (Select one) (Mandatory if either Code 2330, 2332, or 2334 is selected)	
	Requirements per Specification shown with Code 1006	2382
	or	
	Requirements per Specification shown with Code 1O06 except .	2384
	or	
	Requirements as follows:	
	*No evidence of physical damage or degradation of performance	2385
	Pretest requirements per Design Characteristics	2386
	Requirements during test per Design Characteristics	2388
	Requirements after test per Design Characteristics	2390

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF. PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.69	Vibration	
1.2.69.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	2950
	or	
	Test per Specification shown with Code 1006 except .	2952
	or	
	Test per Method 514 of MIL-STD-810	
	*Test procedure number (Roman numeral)	2953
	*Test curve selection	
	*Curve identification letter	2954
	*Curve figure number	2956
	Measurements prior to test (Select one or more)	
	Starting current	2970
	Operating current	2972
	Acceleration	2974
	Operating speed with load	2976
	Operating speed without load	2978

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.69.1 Cont.	Breakaway torque	2980
	Overtravel	2981
	Measurements during test (Select one or more if Code 2998 not used)	
	Starting current	2958
	Operating current	2960
	Acceleration	2962
	Operating speed with load	2964
	Operating speed without load	2966
	Breakaway torque	2968
	Overtravel	2969
	Measurements after test (Select one or more)	
	Starting current	2982
	Operating current	2984
	Acceleration	2986
	Operating speed with load	2988
	Operating speed without load	2990
	Breakaway torque	2992
	Overtravel	2993

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.69.1 Cont.	Acceleration nominal derating of selected test curve (g's)	2994
	Frequency nominal derating of selected test curve (hertz)	2996
	Test specimen shall not be operated	2998
	Limitation of nominal transverse motion in respect to input motion (percent)	3000
	Test temperature (deg C)	
	Low	3002
	High	3004
	Vibration time at temperature extremes	
	At low temperature (minutes)	3006
	At high temperature (minutes)	3008
	Procedure for combining sinusoidal and random vibration shall be . (If not performed separately)	3010
	For test procedures VIII and IX only	
	Total vehicle mileage (miles)	3012
	For test procedures X and XI only	
	Total land transportation mileage (miles)	3014

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.69.2	Requirement (Select one) (Mandatory if either Code 2950, 2952, or 2953 is selected)	
	Requirements per Specification shown with Code 1006	3016
	or	
	Requirements per Specification shown with Code 1006 except .	3018
	or	
	Requirements as follows:	
	*No evidence of physical damage or degradation of performance	3020
	Pretest requirements per Design Characteristics	3022
	Requirements during test per Design Characteristics	3024
	Requirements after test per Design Characteristics	3026
1.2.69	Acoustical Noise	
1,2.69.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	3030
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC NAME	CODE
1.2.69.1 Cont.	Test per Specification shown with Code 1006 except _____.	3032
	or	
	Test per Method 515 of MIL-STD-810	
	*Test category (Select one)	
	A	3036
	or	
	B	3038
	or	
	C	3040
	or	
	D	3042
	Measurements prior to test (Select one or more)	
	Starting current	3044
	Operating current	3046
	Acceleration	3048
	Operating speed with load	3050
	Operating speed without load	3052
	Breakaway torque	3054
	Overtravel	3055

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF. PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.69.1 Cont.	Measurements during test (Select one or more)	
	Starting current	3056
	Operating current	3058
	Acceleration	3060
	Operating speed with load	3062
	Operating speed without load	3064
	Breakaway torque	3066
	Overtravel	3067
	Measurements after test (Select one or more)	
	Starting current	3068
	Operating current	3070
	Acceleration	3072
	Operating speed with load	3074
	Operating speed without load .	3076
	Breakaway torque	3078
	Overtravel	3079
	Actuator operating time during test (minutes)	3080

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC NAME	CODE
1.2.69.2	Requirement (Select one) (Mandatory if either Code 3030, 3032, 3036, 3038, 3040, or 3042 is selected)	
	Requirements per Specification shown with Code 1006	3082
	. or	
	Requirements per Specification shown with Code 1006 except _____.	3084
	or	
	Requirements as follows:	
	*No physical damage or degradation	3086
	Pretest requirements per Design Characteristics	3088
	Requirements during test per Design Characteristics	3090
	Requirements after test per Design Characteristics	3092
1.2.69	Shock	
1.2.69.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	3100
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.69.1 Cont.	Test per Specification shown with Code 1006 except .	3102
	or	
	Test per Method 516 of MIL-STD-810	
	*Test procedure number (Roman numeral)	3104
	Measurements prior to test (Select one or more)	
	Starting current	3106
	Operating current	3108
	Acceleration	3110
	Operating speed with load	3112
	Operating speed without load	3114
	“Breakaway torque	3116
	Overtravel	3117
	Shock pulse selection (for test procedures 1, III, and IV only)	
	Shock pulse configuration figure (Select one)	
	Figure 516.1-1	3118
	or	
	Figure 516.1-2	3120

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF. PARA,	CHARACTERISTIC NAME	CODE
1.2.69.1 Cont.	Shock pulse peak letter (Select one)	
	A	3122
	or	
	B	3124
	Shock pulse duration letter (Select one)	
	C	3126
	or	
	D	3128
	Test temperature (deg C)	
	Low	3130
	High	3132
	Measurements during test (for test procedures I and IV only) (Select one or more)	
	Starting current	3134
	Operating current	3136
	Acceleration	3138
	Operating speed with load	3140
	Operating speed without load	3142

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.69.1 Cont.	Breakaway torque	3144
	Overtravel	3145
	Measurements after test (Select one or more)	
	Starting current	3146
	Operating current	3148
	Acceleration	3150
	Operating speed with load	3152
	Operating speed without load	3154
	Breakaway torque	3156
	Overtravel	3157
1.2.69.2	Requirement (Select one) (Mandatory if either Code 3100, 3102, or 3104 is selected)	
	Requirements per Specification shown with Code 1006	3158
	or	
	Requirements per Specification shown with Code 1006 except ___.	3160
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.69.2 Cont.	Requirements as follows:	
	*No evidence of physical damage or degradation of performance	3162
	Pretest requirements per Design Characteristics	3164
	Requirements during test per Design Characteristics	3166
	Requirements after test per Design Characteristics	3168
1.2.69	Combined Temperature-Humidity-Altitude	
1.2.69.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	2450
	or	
	Test per Specification shown with Code 1006 except ___.	2452
	or	
	Test per Method 518 0f MIL-STD-810	2454
	Measurements prior to test (Select one or more	
	Starting current	2456
	Operating current	2458
	Acceleration	2460

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.69.1 Cont.	Operating speed with load	2462
	Operating speed without load	2466
	Breakaway torque	2468
	Overtravel	2469
	Measurements after test (Select one or more.)	
	Starting current	2470
	Operating current	2472
	Acceleration	2474
	Operating speed with load	2476
	Operating speed without load	2478
	Breakaway torque	2480
	Overtravel	2481
1.2.69.2	Requirement (Select one) (Mandatory if either Code 2450, 2452, or 2454 is selected)	
	Requirements per Specification shown with Code 1006	2482
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC NAME	CODE
1.2.69.2 Cont.	Requirements per Specification shown with Code 1006 except .	2484
	or	
	Requirements as follows:	
	*No evidence of physical damage - or degradation of performance	2485
	Pretest requirements per Design Characteristics	2486
	Requirements after test per Design Characteristics	2488
1.2.70	Workmanship	
	Shall be in accordance with .	6870
1.2.71	*Source (Select one of the following. Complete at least one line of the Source Table except when source tabulation is used)	
	Source Control	6873
	or	
	Specification Control	6874
	or	
	Source Tabulation Table (Enter on SRS applicable codes from Appendix S)	
	Source Control Items .	7039
	Specification Control Items .	7040

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.72	Material and Process Substitution Items furnished to this document shall be representative of a product which has been accepted by a procuring activity. No substitution of materials and processes or change in design shall be made without prior approval of the procuring activity when such change affects interchangeability with respect to installation, performance, or design within the requirements of this document.	6949
1.2.73	Superseded Document	6871
	*Date	6872

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.10	*First Article Inspection - Select One	
	First Article Inspection on this item in accordance with the testing in the applicable general specification and in the order specified herein. (Enter all required tests in desired order of testing on the SRS, using applicable codes from Appendix C.)	1540
	First Article Inspection on this item in accordance with the testing in the applicable general specification.	1541
	First Article Inspection not required.	1542
	First Article Inspection on this item in accordance with the testing in the applicable general specification except as shown on Appendix J. (Enter all tests to be deleted on the SRS, using applicable codes from Appendix J.)	7021
	First Article Inspection on this item in accordance with Appendix C. (Enter all required tests in desired order of testing on the SRS, using applicable codes from Appendix C.)	7022

‘INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.10 Cont.	First Article Inspection on this item in accordance with the testing in the applicable general specification except ____.	7023
1.2.74	First Article Test Data (Select one if required)	
	First Article Test Data	7024
	First Article Test Data on a similar item.	1543
1.2.10	*Group A Inspection - Select One	
	Group A inspection on this item in accordance with the applicable general military specification and in the order specified herein. (Enter all required tests in desired order of testing on the SRS, using applicable codes from Appendix D.)	1545
	Group A inspection on this item in accordance with the applicable general military specification with additional tests required. (Enter the added tests only on the SRS, using applicable codes from Appendix D. Enter the sequence on the SRS, using applicable codes from Appendix G.	1546

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.10 Cont.	Group A inspection on this item in accordance with the applicable general military specification with certain tests deleted. (Enter deleted tests on the SRS, using applicable codes from Appendix H.)	1547
	Group A inspection on this item in accordance with the applicable general military specification.	1548
	Group A inspection on this item in accordance with Appendix D. (Enter all required tests in the desired order of testing on the SRS, using applicable codes from Appendix D. (If this code is used, Code 7033 or 7034 is mandatory.)	7031
	*Group A sampling plan is specified in MIL-STD-105. (Enter inspection level and AQL on the SRS, using applicable codes from Appendix D.) (If sub groups are used, use Code 7036.)	7033
	Tests in each Group A inspection sub group shall be combined for inspection. (Use this code if Appendix D shows sub groups.)	7036
	or	

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC NAME	CODE
1.2.10 Cont.	*Group A sampling plan shall be 100 percent with defective units removed. (Enter 100 percent on the SRS, using applicable codes from Appendix D.)	7034
	Lot shall be rejected if defective exceed ____ percent.	7035
	Group A inspection on this item in accordance with applicable general military specification except ____.	7032
1.2.74	Group A Test Data to be Recorded	1549
1.2.10	*Group B Inspection - Select One	
	Group B inspection on this item in accordance with the applicable general specification and in the order specified herein. (Enter all required tests in desired order of testing on the SRS, using applicable codes from Appendix E-1 or E-2.)	1550

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF. PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.10 Cont.	Group B inspection on this item in accordance with the applicable general military specification with additional tests required. (Enter the added tests only on the SRS, using applicable codes from Appendix E-1 or E-2. Enter the sequence on the SRS, using applicable codes from Appendix G.)	1551
	Group B inspection on this item in accordance with the applicable general military specification with certain tests deleted. (Enter deleted tests on the SRS, using applicable codes from Appendix H.)	1552
	Group B inspection on this item in accordance with the applicable general military specification.	1553
	Group B inspection on similar items in accordance with the applicable general military specification.	1554
	Group B inspection not required.	7045

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC NAME	CODE
1.2.10 Cont.	Group B inspection on this item in accordance with Appendix E-1 for sample as specified in the table. (Enter all required tests in the desired order of testing on the SRS, using applicable codes from Appendix E-l.)	7041
	Group B inspection on this item in accordance with Appendix E-2 for statistical Sampling in accordance with MIL-STD-105. (Enter all required tests in desired order of testing on the SRS, using applicable codes from Appendix E-2.)	7044
	Group B inspection on this item in accordance with applicable general military specification except ___.	7042
1.2.74	Group B Test Data to be Recorded.	7043
1.2.10	Group C Inspection - Select One (If required)	
	Group C inspection on this item in accordance with the applicable general military specification and in the order specified herein. (Enter all required tests in desired order of test on the SRS, using applicable codes from Appendix F.)	1555

"INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.10 Cont.	Group C inspection on this item in accordance with the applicable general military specification with additional tests required. (Enter the added tests only on the SRS, using applicable codes from Appendix F. Enter the sequence on the SRS, using applicable codes from Appendix G.)	1556
	Group C inspection on this item in accordance with the applicable general military specification with certain tests deleted. (Enter deleted tests on the SRS, using applicable codes from Appendix H.)	1557
	Group C inspection on this item in accordance with the applicable general military specification.	1558
	Group C inspection on similar items in accordance with the applicable general military specification.	1559
	Group C inspection on this item in accordance with Appendix F. (Enter all required tests in desired order of testing on the SRS, using applicable codes from Appendix F.)	7053

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC NAME	CODE
1.2.10 Cont.	Group C inspection on this item in accordance with applicable general military specification except .	7054
	Group C Inspection not required.	7058
1.2.74	Group C Test Data to be Recorded.	7055
1.2.74	*Test Methods - Select One	
	As stated herein.	1560
	Alternate methods permitted.	1561
1.2.10	Inspection of Preparation for Delivery	
	As specified in Specification shown with Code 1006	1526
	or	
	As required to determine compliance with Section 5	1527
	Sampling plan shall be .	1528

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIAL REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.8	Additional Requirement(s) (List each requirement separately starting with Code 7001, 7002, etc. and limiting each to 189 characters including punctuation, and spaces).	7001 7002 7003 7004 7005
1.2.8	Marking requirements (List each requirement separately starting with Code 6991, 6992, etc. and limiting each to 189 characters including punctuation and spaces).	6991 6992 6993 6994 6995
1.2.8	Additional Quality Assurance Provisions (List each item separately starting with Code 7011, 7012, etc. and limiting each to 189 characters including punctuation and spaces).	7011

‘INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIAL REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN,

REF, PARA.	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.2.8 Cont.		7012
		7913
		7014
		7015
1.2.8	Packaging Requirement(s) for Section 5 (List each requirement separately starting with Code 7006, 7007, etc. and limiting each to 189 characters including punctuation, and spaces).	7006
		7007
		7008
		7009
		7010
1.2.8	Additional Note(s) for Section 6 (List each requirement separately starting with Code 7016, 7017, etc. and limiting each to 189 characters including punctuation, and spaces).	7016
		7017
		7018
		7019
		7020

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. ACTUATOR MATERIALS TABLE

(See 1.2.21)

COMPONENT		MATERIAL		SPECIFICATION		NUMBER OR ALLOY NUMBER		CONDITION OR TEMPER		FORM		CLASS		GRADE		TYPE		COMPOSITION	
CODE	NAME	CODE	NUMBER FROM MIL-STD-35-1	CODE	NUMBER	CODE	NUMBER	CODE	NUMBER	CODE	NAME	CODE	NUMBER	CODE	NUMBER	CODE	NUMBER	CODE	NUMBER OR LETTER
5080		5081		5082		5083		5084		5085		5086		5087		5088		5089	
5090		5091		5092		5093		5094		5095		5096		5097		5098		5099	
5100		5101		5102		5103		5104		5105		5106		5107		5108		5109	
5110		5111		5112		5113		5114		5115		5116		5117		5118		5119	
5120		5121		5122		5123		5124		5125		5126		5127		5128		5129	
5130		5131		5132		5133		5134		5135		5136		5137		5138		5139	
5140		5141		5142		5143		5144		5145		5146		5147		5148		5149	
5150		5151		5152		5153		5154		5155		5156		5157		5158		5159	
5160		5161		5162		5163		5164		5165		5166		5167		5168		5169	
5170		5171		5172		5173		5174		5175		5176		5177		5178		5179	
5180		5181		5182		5183		5184		5185		5186		5187		5188		5189	
5190		5191		5192		5193		5194		5195		5196		5197		5198		5199	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE II. ACTUATOR FINISHES TABLE

(See 1.2.22)

COMPONENT		COMPONENT SURFACE		FINISH		SPECIFICATION		CLASS		TYPE		GRADE		COLOR		THICKNESS			
CODE	NAME	CODE	NAME	CODE	NUMBER FROM MIL-STD-35-2	CODE	NUMBER	CODE	NUMBER	CODE	NUMBER	CODE	NUMBER	CODE	NAME OR NUMBER FROM FED-STD-595	MAXIMUM		MINIMUM	
																CODE	INCH	CODE	INCH
4541		4542		4543		4544		4545		4546		4547		4548		4549		4550	
4551		4552		4553		4554		4555		4556		4557		4558		4559		4560	
4561		4562		4563		4564		4565		4566		4567		4568		4569		4570	
4571		4572		4573		4574		4575		4576		4577		4578		4579		4580	
4581		4582		4583		4584		4585		4586		4587		4588		4589		4590	
4591		4592		4593		4594		4595		4596		4597		4598		4599		4600	
4601		4602		4603		4604		4605		4606		4607		4608		4609		4610	
4611		4612		4613		4614		4615		4616		4617		4618		4619		4620	
4621		4622		4623		4624		4625		4626		4627		4628		4629		4630	
4631		4632		4633		4634		4635		4636		4637		4638		4639		4640	
4641		4642		4643		4644		4645		4646		4647		4648		4649		4650	
4651		4652		4653		4654		4655		4656		4657		4658		4659		4660	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX A - DIMENSION CHARACTERISTIC TABLE

(See 1.2.6)

Dimension		Minimum		Maximum	
Code	Legend	Code	Value	Code	Value
1010	AA	1011		1012	
1013	AB	1014		1015	
1016	AC	1017		1018	
1019	AD	1020		1021	
1022	AE	1023		1024	
1025	AF	1026		1027	
1028	AG	1029		1030	
1031	AH	1032		1033	
1034	AJ	1035		1036	
1037	AK	1038		1039	
1040	AL	1041		1042	
1043	AM	1044		1045	
1046	AN	1047		1048	
1049	AP	1050		1051	
1052	AQ	1053		1054	
1055	AR	1056		1057	
1058	AS	1059		1060	
1061	AT	1062		1063	
1064	AU	1065		1066	
1067	AV	1068		1069	
1070	AW	1071		1072	
1073	AX	1074		1075	
1076	AY	1077		1078	
1079	AZ	1080		1081	
1082	BA	1083		1084	
1085	BB	1086		1087	
1088	BC	1089		1090	
1091	BD	1092		1093	
1094	BE	1095		1096	
1097	BF	1098		1099	

Dimension		Minimum		Maximum	
Code	Legend	Code	Value	Code	Value
1100	BG	1101		1102	
1103	BH	1104		1105	
1106	BJ	1107		1108	
1109	BK	1110		1111	
1112	BL	1113		1114	
1115	BM	1116		1117	
1118	BN	1119		1120	
1121	BP	1122		1123	
1124	BQ	1125		1126	
1127	BR	1128		1129	
1130	BS	1131		1132	
1133	BT	1134		1135	
1136	BU	1137		1138	
1139	BV	1140		1141	
1142	BW	1143		1144	
1145	BX	1146		1147	
1148	BY	1149		1150	
1151	BZ	1152		1153	
1154	CA	1155		1156	
1157	CB	1158		1159	
1160	CC	1161		1162	
1163	CD	1164		1165	
1166	CE	1167		1168	
1169	CF	1170		1171	
1172	CG	1173		1174	
1175	CH	1176		1177	
1178	CJ	1179		1180	
1181	CK	1182		1183	
1184	CL	1185		1186	
1187	CM	1188		1189	

Specification Requirement Sheet must contain Applicable Codes, Legends, and Values

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX A - DIMENSION CHARACTERISTIC TABLE

(See 1.2.6)

Dimension		Minimum		Maximum	
Code	Legend	Code	Value	Code	Value
1190	CN	1191		1192	
1193	CP	1194		1195	
1196	CQ	1197		1198	
1199	CR	1200		1201	
1202	CS	1203		1204	
1205	CT	1206		1207	
1208	CU	1209		1210	
1211	CV	1212		1213	
1214	CW	1215		1216	
1217	CX	1218		1219	
1220	CY	1221		1222	
1223	CZ	1224		1225	
1226	DA	1227		1228	
1229	DB	1230		1231	
1232	DC	1233		1234	
1235	DD	1236		1237	
1238	DE	1239		1240	
1241	DF	1242		1243	
1244	DG	1245		1246	
1247	DH	1248		1249	
1250	DJ	1251		1252	
1253	DK	1254		1255	
1256	DL	1257		1258	
1359	DM	1360		1361	
1262	DN	1263		1264	
1265	DP	1266		1267	
1268	DQ	1269		1270	
1271	DR	1272		1273	
1274	DS	1275		1276	
1277	DT	1278		1279	

Dimension		Minimum		Maximum	
Code	Legend	Code	Value	Code	Value
1280	DU	1281		1282	
1283	DV	1284		1285	
1286	DW	1287		1288	
1289	DX	1290		1291	
1292	DY	1293		1294	
1295	DZ	1296		1297	
1298	EA	1299		1300	
1301	EB	1302		1303	
1304	EC	1305		1306	
1307	ED	1308		1309	
1310	EE	1311		1312	
1313	EF	1314		1315	
1316	EG	1317		1318	
1319	EH	1320		1321	
1322	EJ	1323		1324	
1325	EK	1326		1327	
1328	EL	1329		1330	
1331	EM	1332		1333	
1334	EN	1335		1336	
1337	EP	1338		1339	
1340	EQ	1341		1342	
1343	ER	1344		1345	
1346	ES	1347		1348	
1349	ET	1350		1351	
1352	EU	1353		1354	
1355	EV	1356		1357	
1358	HT	1359		1360	
1361	ID	1362		1363	
1364	OD	1365		1366	
1367	TH	1368		1369	

Specification Requirement Sheet must contain applicable Codes, Legends, and Values

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX B - APPLICABLE DOCUMENTS

(See 1.2.9)

Characteristic Code	Federal Spec. Number
6015	
6016	
6017	
6018	
6019	
6020	
6021	
6022	
6023	
6024	

Characteristic Code	Military Spec. Number
6035	
6036	
6037	
6038	
6039	
6040	
6041	
6042	
6043	
6044	

Characteristic Code	Federal Standard
6055	
6056	
6057	
6058	
6059	
6060	
6061	
6062	
6063	
6064	

Characteristic Code	Military Standard
6075	
6076	
6077	
6078	
6079	
6080	
6081	
6082	
6083	
6084	

Characteristic Code	Other Publications
6095	
6096	
6097	
6098	
6099	
6100	

Specification Requirement Sheet must contain applicable Codes and Document Numbers

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX C - FIRST ARTICLE INSPECTION

(See 1.2.10)

Group Number		Test Title		Number Units		Allowable Failures	
Code	Value	Code		Code	Value	Code	Value
6125		6126		6127		6128	
6129		6130		6131		6132	
6133		6134		6135		6136	
6137		6138		6139		6140	
6141		6142		6143		6144	
6145		6146		6147		6148	
6149		6150		6151		6152	
6153		6154		6155		6156	
6157		6158		6159		6160	
6161		6162		6163		6164	
6165		6166		6167		6168	
6169		6170		6171		6172	
6173		6174		6175		6176	
6177		6178		6179		6180	
6181		6182		6183		6184	
6185		6186		6187		6188	
6189		6190		6191		6192	
6193		6194		6195		6196	
6197		6198		6199		6200	
6201		6202		6203		6204	
6205		6206		6207		6208	
6209		6210		6211		6212	
6213		6214		6215		6216	
6217		6218		6219		6220	
6221		6222		6223		6224	
6225		6226		6227		6228	
6229		6230		6231		6232	
6233		6234		6235		6236	
6237		6238		6239		6240	
6241		6242		6243		6244	
6245		6246		6247		6248	

Specification Requirement Sheet must contain Codes and Applicable Values

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX D - GROUP A QUALITY CONFORMANCE INSPECTION

(See 1.2.10)

Test Title		Quantity Inspected		AQL			
				Major		Minor	
Code	Value	Code	Value	Code	Value	Code	Value
6315		6316		6317		6318	
6319		6320		6321		6322	
6323		6324		6325		6326	
6327		6328		6329		6330	
6331		6332		6333		6334	
6335		6336		6337		6338	
6339		6340		6341		6342	
6343		6344		6345		6346	
6347		6348		6349		6350	
6351		6352		6353		6354	
6355		6356		6357		6358	
6359		6360		6361		6362	
6363		6364		6365		6366	
6367		6368		6369		6370	
6371		6372		6373		6374	
6375		6376		6377		6378	

Specification Requirement Sheet must contain Codes and applicable Values

SOURCE TABLE

(See 1.2.71)

SOURCE(S)			
CODE	FSCM	CODE	MFG. PART NO.
5001		5002	
5003		5004	
5005		5006	
5007		5008	
5009		5010	
5011		5012	

Specification Requirement Sheet must contain Codes, FSCM. and Part No.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

(See 1.2.10) APPENDIX E-1 - GROUP B QUALITY CONFORMANCE INSPECTION

Test Title		FIXED SAMPLE PLAN			
		Quantity Inspected		Defects Allowed	
Code	Value	Code	Value	Code	Value
6410		6411		6412	
6413		6414		6415	
6416		6417		6418	
6419		6420		6421	
6422		6423		6424	
6425		6426		6427	
6428		6429		6430	
6431		6432		6433	
6434		6435		6436	
6437		6438		6439	
6440		6441		6442	
6443		6444		6445	
6446		6447		6448	
6449		6450		6451	
6452		6453		6454	
6455		6456		6457	
6458		6459		6460	
6461		6462		6463	
6464		6465		6466	
6467		6468		6469	
6470		6471		6472	
6473		6474		6475	
6476		6477		6478	
6479		6480		6481	
6482		6483		6484	

Specification Requirement Sheet must contain Codes and Applicable Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX E-2 - GROUP B QUALITY CONFORMANCE INSPECTION

(See 1.2.10)

Test Title		STATISTICAL SAMPLE PLAN			
		Inspection Level		AQL	
Code	Value	Code	Value	Code	Value
6410		6715		6716	
6413		6717		6718	
6416		6719		6720	
6419		6721		6722	
6422		6723		6724	
6425		6725		6726	
6428		6727		6728	
6431		6729		6730	
6434		6731		6732	
6437		6733		6734	
6440		6735		6736	
6443		6737		6738	
6446		6739		6740	
6449		6741		6742	
6452		6743		6744	
6455		6745		6746	
6458		6747		6748	
6461		6749		6750	
6464		6751		6752	
6467		6753		6754	
6470		6755		6756	
6473		6757		6758	
6476		6759		6760	
6479		6761		6762	
6482		6763		6764	

Specification Requirement Sheet must contain Codes and applicable Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX F - GROUP C QUALITY CONFORMANCE INSPECTION

(See 1.2.10)

Test Title		Quantity Inspected		Defects Allowed	
Code	Value	Code	Value	Code	Value
6525		6526		6527	
6528		6529		6530	
6531		6532		6533	
6534		6535		6536	
6537		6538		6539	
6540		6541		6542	
6543		6544		6545	
6546		6547		6548	
6549		6550		6551	
6552		6553		6554	
6555		6556		6557	
6558		6559		6560	
6561		6562		6563	
6564		6565		6566	
6567		6568		6569	
6570		6571		6572	
6573		6574		6575	
6576		6577		6578	
6579		6580		6581	
6582		6583		6584	
6585		6586		6587	
6588		6589		6590	
6591		6592		6593	
6594		6595		6596	
6597		6598		6599	
6600		6601		6602	
6603		6604		6605	
6606		6607		6608	
6609		6610		6611	
6612		6613		6614	

Specification Requirement Sheet must contain Codes and applicable Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX G - QUALITY CONFORMANCE SEQUENCE TABLE

(See 1.2.10)

Group A Test Title Added		Group A Preceding Inspection Test	
Code	Value	Code	Value
6810		6811	
6812		6813	
6814		6815	
6816		6817	
6818		6819	
6820		6821	
6822		6823	
6824		6825	
6826		6827	
6828		6829	
6830		6831	
6832		6833	
6834		6835	
6836		6837	
6838		6839	

Specification Requirement Sheet must contain Codes and applicable Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX G - QUALITY CONFORMANCE SEQUENCE TABLE:

(See 1.2.10)

Group B Test Title Added		Group B Preceding Inspection Test	
Code	Value	Code	Value
6840		6841	
6842		6843	
6844		6845	
6846		6847	
6848		6849	
6850		6851	
6852		6853	
6854		6855	
6856		6857	
6858		6859	
6860		6861	
6862		6863	
6864		6865	
6866		6867	
6868		6869	

Specification Requirement Sheet must contain Codes and applicable Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX G - QUALITY CONFORMANCE SEQUENCE TABLE

(See 1.2.10)

Group C Test Title Added		Group C Preceding Inspection Test	
Code	Value	Code	Value
6950		6951	
6952		6953	
6954		6955	
6956		6957	
6958		6959	
6960		6961	
6962		6963	
6964		6965	
6966		6967	
6968		6969	
6970		6971	
6972		6973	
6974		6975	
6976		6977	
6978		6979	

Specification Requirement Sheet must contain Codes and applicable Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX H - DELETED TEST TABLE
(When specific tests are not required)

(See 1.2.10)

Group A Deleted Test Title		Group B Deleted Test Title		Group C Deleted Test Title	
Code	Value	Code	Value	Code	Value
6875		6890		6905	
6876		6891		6906	
6877		6892		6907	
6878		6893		6908	
6879		6894		6909	
6880		6895		6910	
6881		6896		6911	
6882		6897		6912	
6883		6898		6913	
6884		6899		6914	
6885		6900		6915	
6886		6901		6916	
6887		6902		6917	
6888		6903		6918	
6889		6904		6919	

Specification Requirement Sheet must contain applicable Codes and Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX J - DELETED FIRST ARTICLE TESTS

(See 1.2.10)

FIRST ARTICLE DELETED TEST TITLE	
CODE	VALUE
6980	
6981	
6982	
6983	
6984	
6985	
6986	
6987	
6988	
6989	

Specification Requirement Sheet must contain Codes and applicable Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX S - SOURCE TABULATION TABLE

(See 1.2.71)

CODE	DASH NO.	CODE	FSCM	CODE	MFG. PART NO.
9051		9151		9451	
		9152		9452	
		9153		9453	
		9154		9454	
		9155		9455	
		9156		9456	
9052		9157		9457	
		9158		9458	
		9159		9459	
		9160		9460	
		9161		9461	
		9162		9462	
9053		9163		9463	
		9164		9464	
		9165		9465	
		9166		9466	
		9167		9467	
		9168		9468	
9054		9169		9469	
		9170		9470	
		9171		9471	
		9172		9472	
		9173		9473	
		9174		9474	
9055		9175		9475	
		9176		9476	
		9177		9477	
		9178		9478	
		9179		9479	
		9180		9480	

CODE	DASH NO.	CODE	FSCM	CODE	MFG. PART NO.
9056		9181		9481	
		9182		9482	
		9183		9483	
		9184		9484	
		9185		9485	
		9186		9486	
9057		9187		9487	
		9188		9488	
		9189		9489	
		9190		9490	
		9191		9491	
		9192		9492	
9058		9193		9493	
		9194		9494	
		9195		9495	
		9196		9496	
		9197		9497	
		9198		9498	
9059		9199		9499	
		9200		9500	
		9201		9501	
		9202		9502	
		9203		9503	
		9204		9504	
9060		9205		9505	
		9206		9506	
		9207		9507	
		9208		9508	
		9209		9509	
		9210		9510	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX S - SOURCE TABULATION TABLE

(See 1.2.71)

CODE	DASH NO.	CODE	FSCM	CODE	MFG. PART NO.
9061		9211		9511	
		9212		9512	
		9213		9513	
		9214		9514	
		9215		9515	
		9216		9516	
9062		9217		9517	
		9218		9518	
		9219		9519	
		9220		9520	
		9221		9521	
		9222		9522	
9063		9223		9523	
		9224		9524	
		9225		9525	
		9226		9526	
		9227		9527	
		9228		9528	
9064		9229		9529	
		9230		9530	
		9231		9531	
		9232		9532	
		9233		9533	
		9234		9534	
9065		9235		9535	
		9236		9536	
		9237		9537	
		9238		9538	
		9239		9539	
		9240		9540	

CODE	DASH NO.	CODE	FSCM	CODE	MFG. PART NO.
9066		9241		9541	
		9242		9542	
		9243		9543	
		9244		9544	
		9245		9545	
		9246		9546	
9067		9247		9547	
		9248		9548	
		9249		9549	
		9250		9550	
		9251		9551	
		9252		9552	
9068		9253		9553	
		9254		9554	
		9255		9555	
		9256		9556	
		9257		9557	
		9258		9558	
9069		9259		9559	
		9260		9560	
		9261		9561	
		9262		9562	
		9263		9563	
		9264		9564	
9070		9265		9565	
		9266		9566	
		9267		9567	
		9268		9568	
		9269		9569	
		9270		9570	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX S - SOURCE TABULATION TABLE

(See 1.2.71)

CODE	DASH NO.	CODE	FSCM	CODE	MFG. PART NO.
9071		9271		9571	
		9272		9572	
		9273		9573	
		9274		9574	
		9275		9575	
		9276		9576	
9072		9277		9577	
		9278		9578	
		9279		9579	
		9280		9580	
		9281		9581	
		9282		9582	
9073		9283		9583	
		9284		9584	
		9285		9585	
		9286		9586	
		9287		9587	
		9288		9588	
9074		9289		9589	
		9290		9590	
		9291		9591	
		9292		9592	
		9293		9593	
		9294		9594	
9075		9295		9595	
		9296		9596	
		9297		9597	
		9298		9598	
		9299		9599	
		9300		9600	

CODE	DASH NO.	CODE	FSCM	CODE	MFG. PART NO.
9076		9301		9601	
		9302		9602	
		9303		9603	
		9304		9604	
		9305		9605	
		9306		9606	
9077		9307		9607	
		9308		9608	
		9309		9609	
		9310		9610	
		9311		9611	
		9312		9612	
9078		9313		9613	
		9314		9614	
		9315		9615	
		9316		9616	
		9317		9617	
		9318		9618	
9079		9319		9619	
		9320		9620	
		9321		9621	
		9322		9622	
		9323		9623	
		9324		9624	
9080		9325		9625	
		9326		9626	
		9327		9627	
		9328		9628	
		9329		9629	
		9330		9630	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX S - SOURCE TABULATION TABLE

(See 1.2.71)

CODE	DASH NO.	CODE	FSCM	CODE	MFG. PART NO.
9081		9331		9631	
		9332		9632	
		9333		9633	
		9334		9634	
		9335		9635	
		9336		9636	
9082		9337		9637	
		9338		9638	
		9339		9639	
		9340		9640	
		9341		9641	
		9342		9642	
9083		9343		9643	
		9344		9644	
		9345		9645	
		9346		9646	
		9347		9647	
		9348		9648	
9084		9349		9649	
		9350		9650	
		9351		9651	
		9352		9652	
		9353		9653	
		9354		9654	
9085		9355		9655	
		9356		9656	
		9357		9657	
		9358		9658	
		9359		9659	
		9360		9660	

CODE	DASH NO.	CODE	FSCM	CODE	MFG. PART NO.
9086		9361		9661	
		9362		9662	
		9363		9663	
		9364		9664	
		9365		9665	
		9366		9666	
9087		9367		9667	
		9368		9668	
		9369		9669	
		9370		9670	
		9371		9671	
		9372		9672	
9088		9373		9673	
		9374		9674	
		9375		9675	
		9376		9676	
		9377		9677	
		9378		9678	
9089		9379		9679	
		9380		9680	
		9381		9681	
		9382		9682	
		9383		9683	
		9384		9684	
9090		9385		9685	
		9386		9686	
		9387		9687	
		9388		9688	
		9389		9689	
		9390		9690	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX S - SOURCE TABULATION TABLE

(See 1.2.71)

CODE	DASH NO.	CODE	FSCM	CODE	MFG. PART NO.
9091		9391		9691	
		9392		9692	
		9393		9693	
		9394		9694	
		9395		9695	
		9396		9696	
9092		9397		9697	
		9398		9698	
		9399		9699	
		9400		9700	
		9401		9701	
		9402		9702	
9093		9403		9703	
		9404		9704	
		9405		9705	
		9406		9706	
		9407		9707	
		9408		9708	
9094		9409		9709	
		9410		9710	
		9411		9711	
		9412		9712	
		9413		9713	
		9414		9714	
9095		9415		9715	
		9416		9716	
		9417		9717	
		9418		9718	
		9419		9719	
		9420		9720	

CODE	DASH NO.	CODE	FSCM	CODE	MFG. PART NO.
9096		9421		9721	
		9422		9722	
		9423		9723	
		9424		9724	
		9425		9725	
		9426		9726	
9097		9427		9727	
		9428		9728	
		9429		9729	
		9430		9730	
		9431		9731	
		9432		9732	
9098		9433		9733	
		9434		9734	
		9435		9735	
		9436		9736	
		9437		9737	
		9438		9738	
9099		9439		9739	
		9440		9740	
		9441		9741	
		9442		9742	
		9443		9743	
		9444		9744	
9100		9445		9745	
		9446		9746	
		9447		9747	
		9448		9748	
		9449		9749	
		9450		9750	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 1.3

CONFIGURATION AND DRAWINGS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 1.3.1

FIGURE TITLES VS FIGURE NUMBERS

Title	Figure Number
Actuator, Electromechanical, Rotary	250-01-1 thru 11
Output Shaft Configurations	259-02-1 (6 sheets)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT B LANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 1.3.2

LEGEND INDEX

AA	Body length
AB	Body width
AC	Body height
AD	Mounting hole size
AE	Distance between shaft centerline and bottom
AF	Vertical distance between mounting hole centerlines
AG	Horizontal distance between mounting hole centerlines
AH	Distance between mounting hole centerline and side
AJ	Distance between mounting hole centerline and bottom
AK	Bracket height
AL	Bracket width
AM	Bracket thickness
AN	Distance between shaft centerline and mounting hole centerline
AP	Stud thread size
AQ	Stud length
AR	Distance between shaft centerline and side
AS	Body diameter
AT	Gear housing width
AU	Gear housing thickness
AV	Gear housing height

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 1.3.2 LEGEND INDEX (CONT.)

AW	Distance between shaft centerline and mounting hole centerline
AX	Motor length
AY	Position indicator length
AZ	Motor diameter
BA	Shaft length
BB	Shaft diameter
BC	Hole diameter
BD	Distance between hole centerline and end of shaft
BE	Keyway depth
BF	Keyway width
BG	Keyway length’
BH	Depth of flat
BJ	Length of flat
BK	Depth of hole
BL	Distance between end of keyway and end of shaft
BM	Distance between clevis ends
BN	Length of clevis
BP	Length of key
BQ	Height of key
BR	Width of key
BS	Thread length

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 7.3.2 LEGEND INDEX (CONT,)

BT	Thread size
BU	Threaded diameter
BV	Type of spline
BW	Length of spline
BX	Spline diameter
BY	Tapered end diameter
BZ	Taper angle
CA	Shaft height
CB	Shaft width
cc	Distance between mounting hole centerlines

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

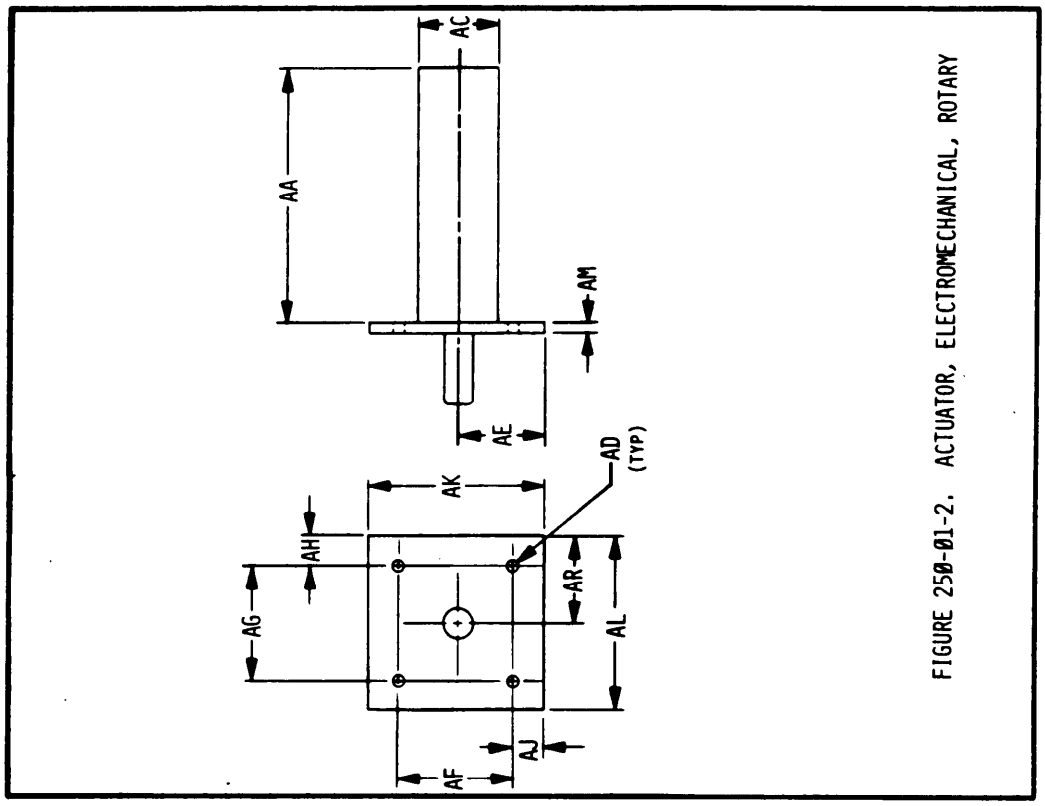


FIGURE 250-01-2. ACTUATOR, ELECTROMECHANICAL, ROTARY

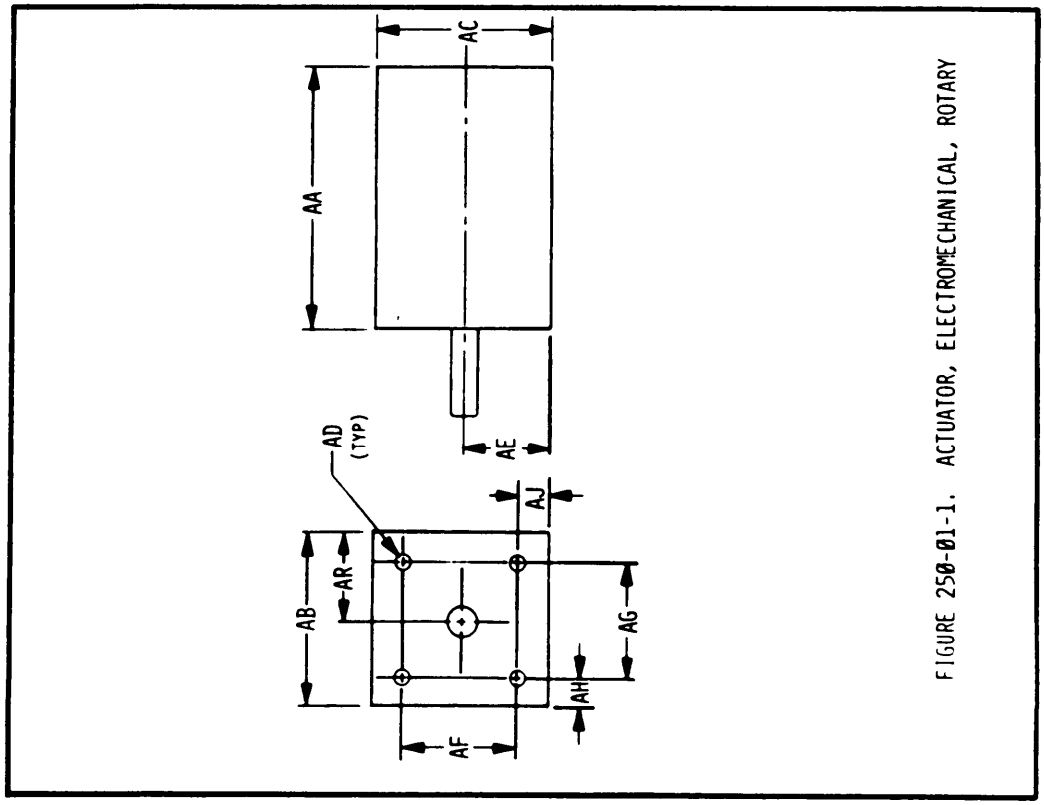


FIGURE 250-01-1. ACTUATOR, ELECTROMECHANICAL, ROTARY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

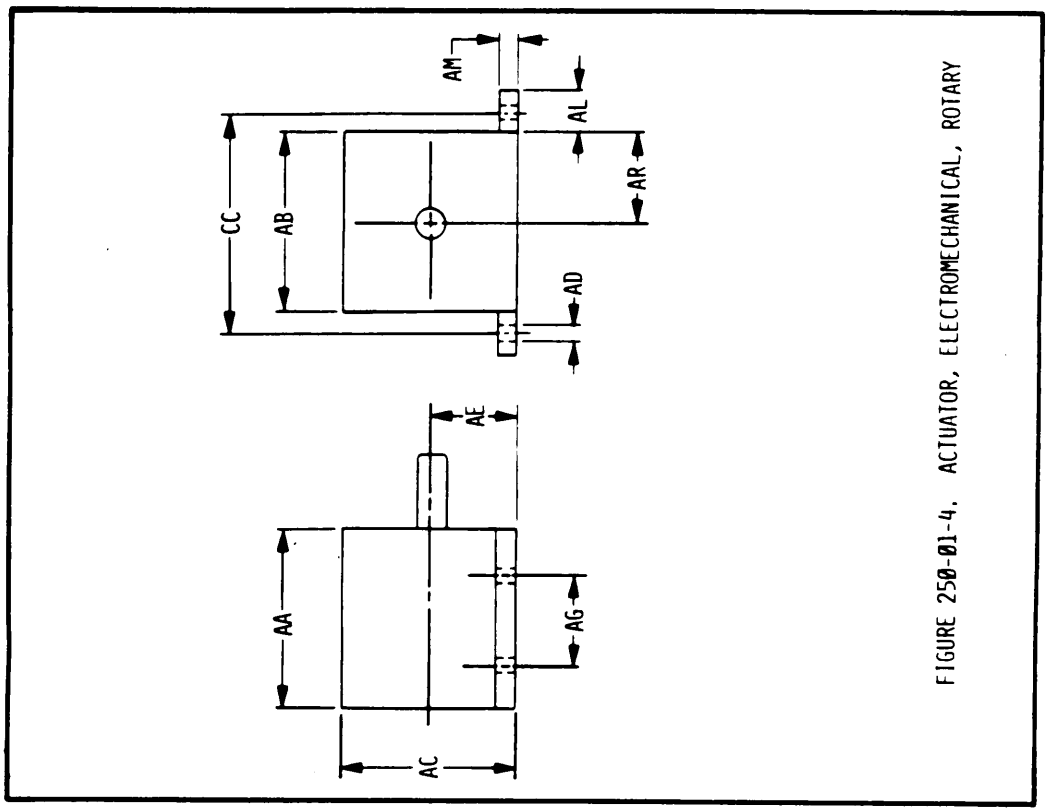


FIGURE 250-01-4. ACTUATOR, ELECTROMECHANICAL, ROTARY

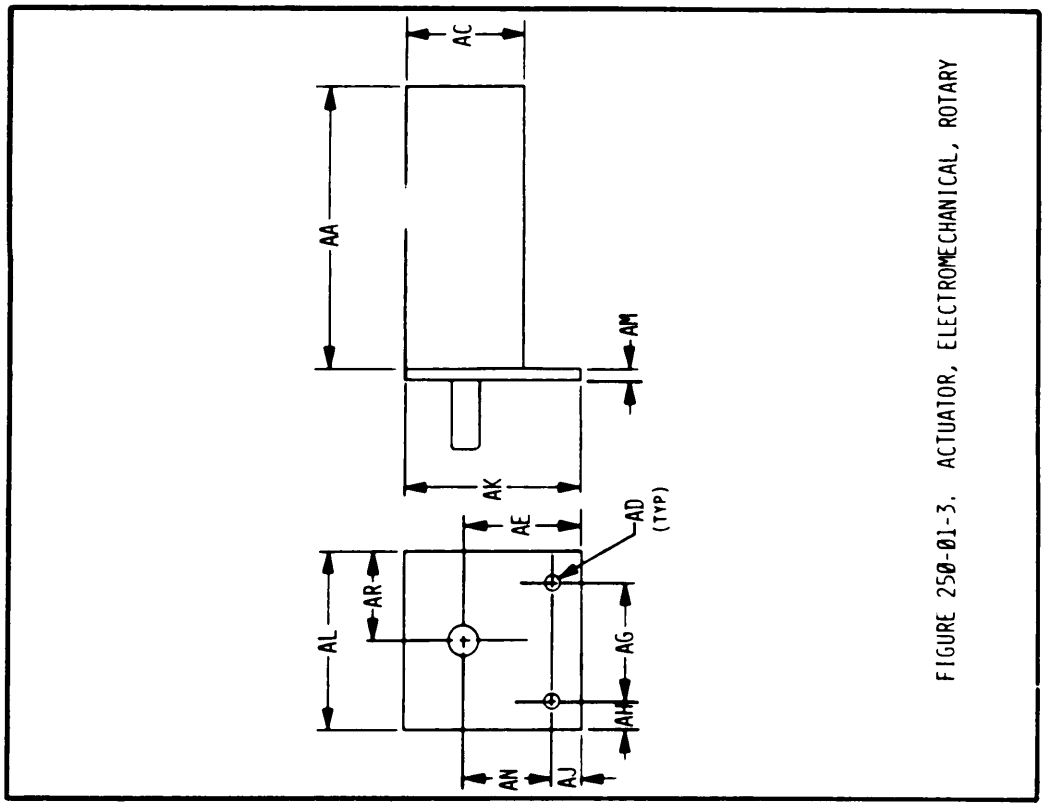


FIGURE 250-01-3. ACTUATOR, ELECTROMECHANICAL, ROTARY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

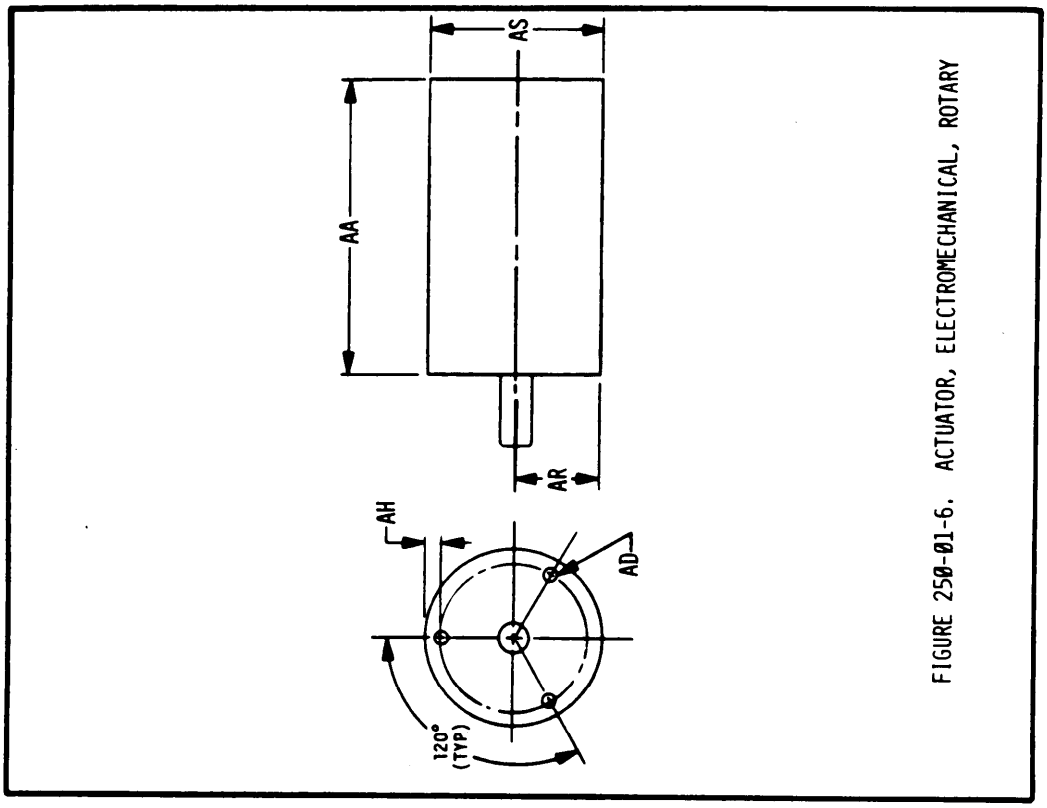


FIGURE 250-01-6. ACTUATOR, ELECTROMECHANICAL, ROTARY

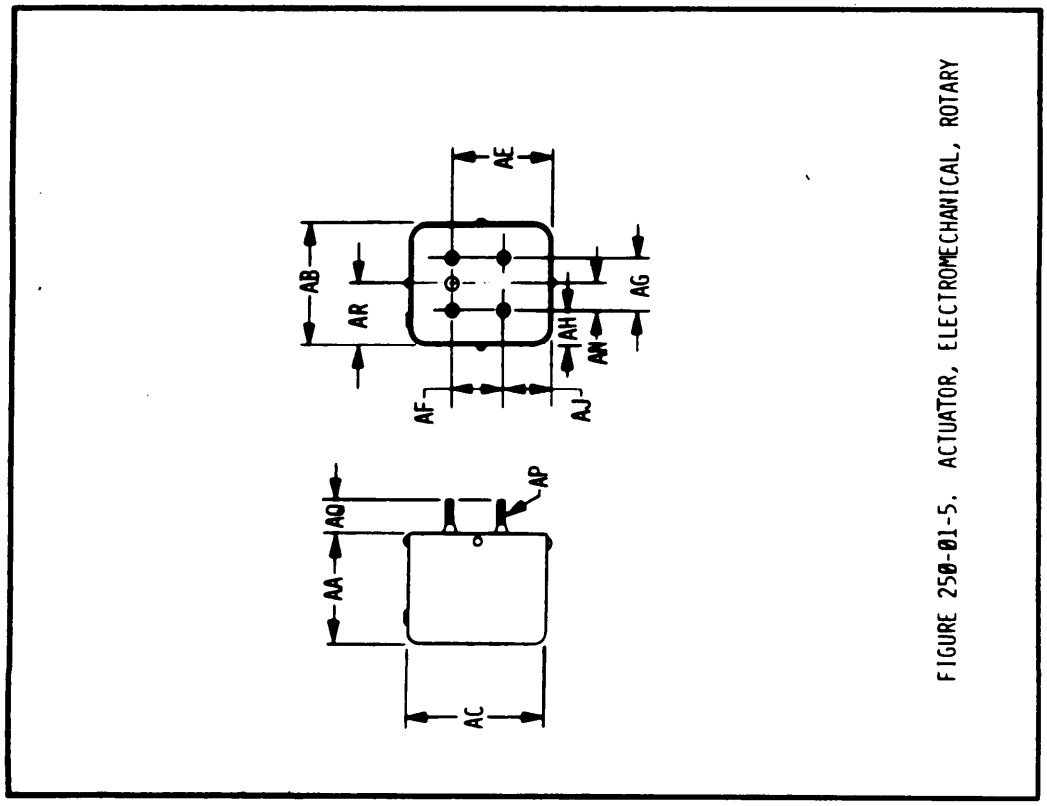


FIGURE 250-01-5. ACTUATOR, ELECTROMECHANICAL, ROTARY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

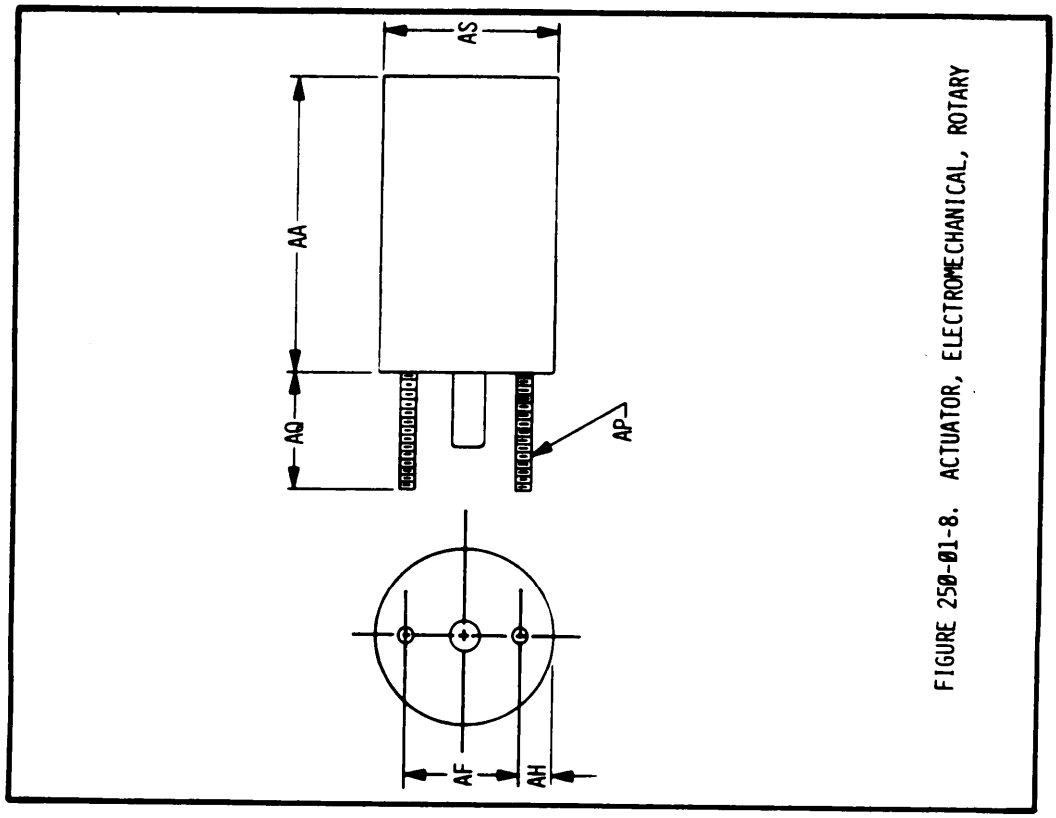


FIGURE 250-01-8. ACTUATOR, ELECTROMECHANICAL, ROTARY

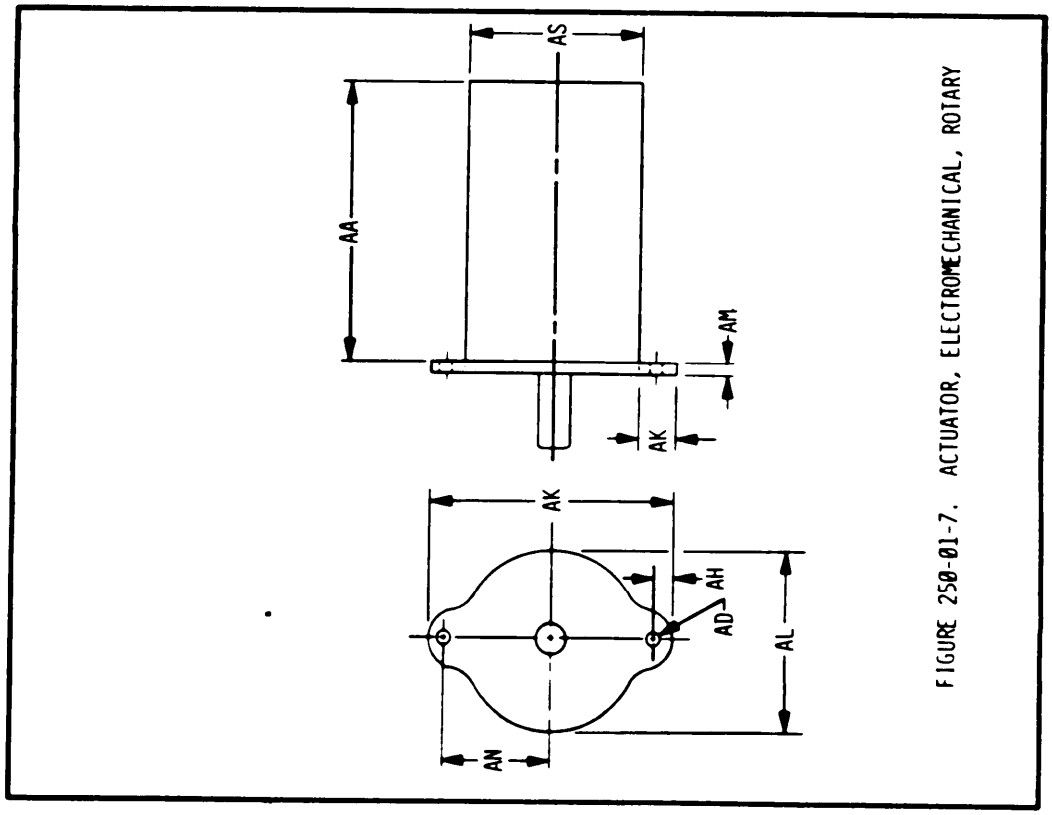


FIGURE 250-01-7. ACTUATOR, ELECTROMECHANICAL, ROTARY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

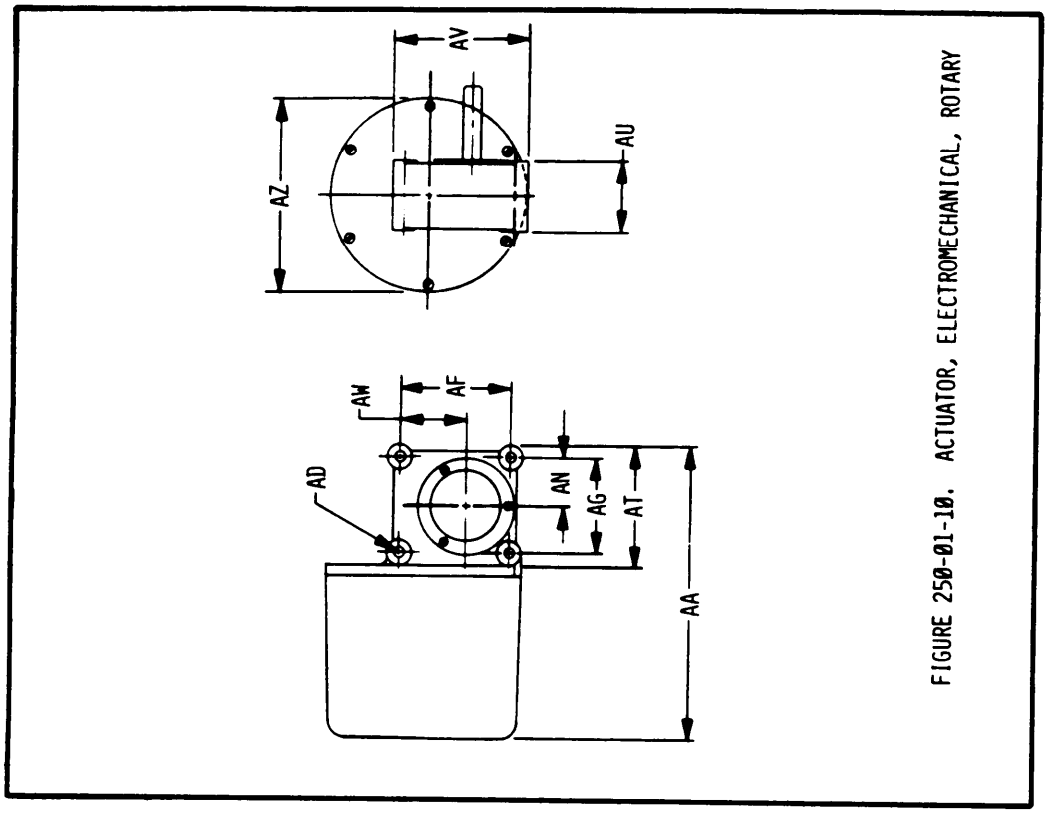


FIGURE 250-01-10. ACTUATOR, ELECTROMECHANICAL, ROTARY

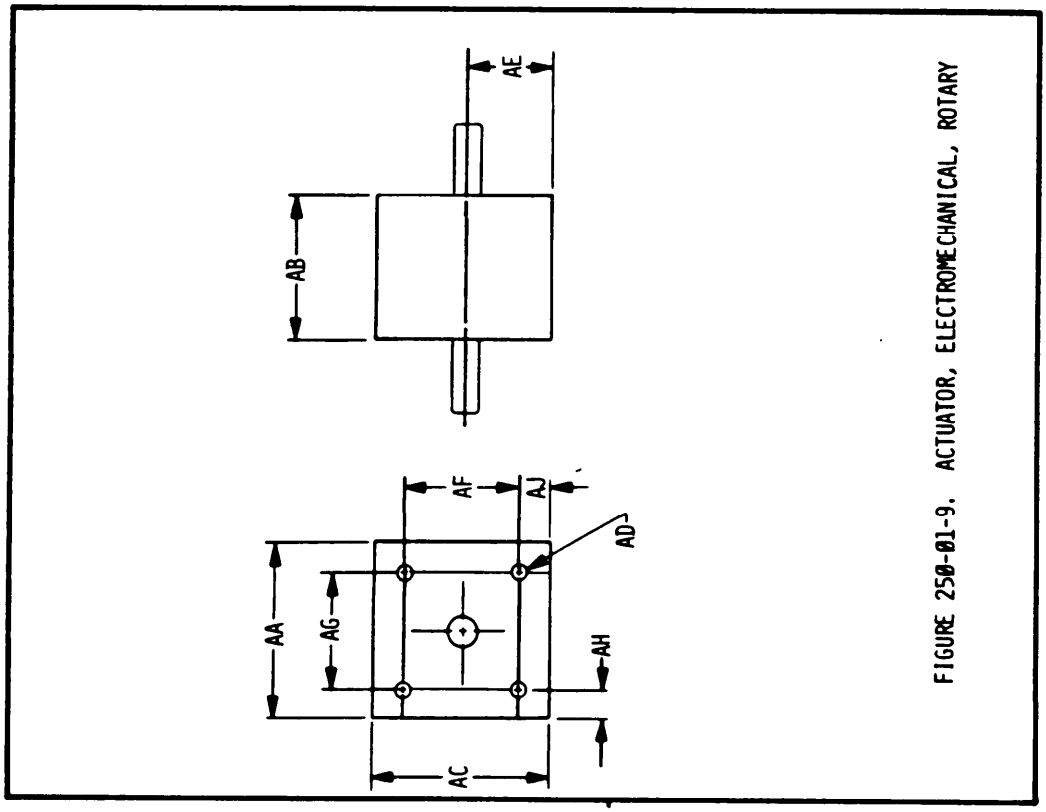


FIGURE 250-01-9. ACTUATOR, ELECTROMECHANICAL, ROTARY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS SPACE INTENTIONALLY

LEFT BLANK

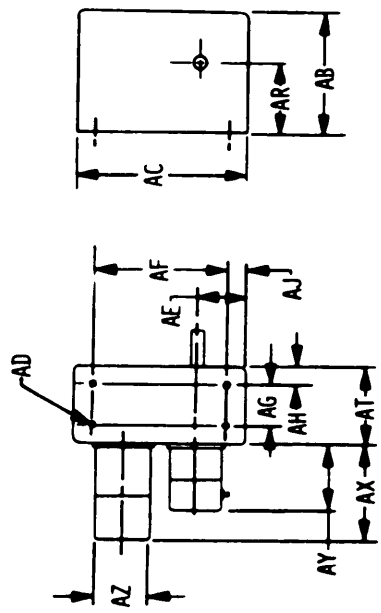


FIGURE 250-01-11. ACTUATOR, ELECTROMECHANICAL, ROTARY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

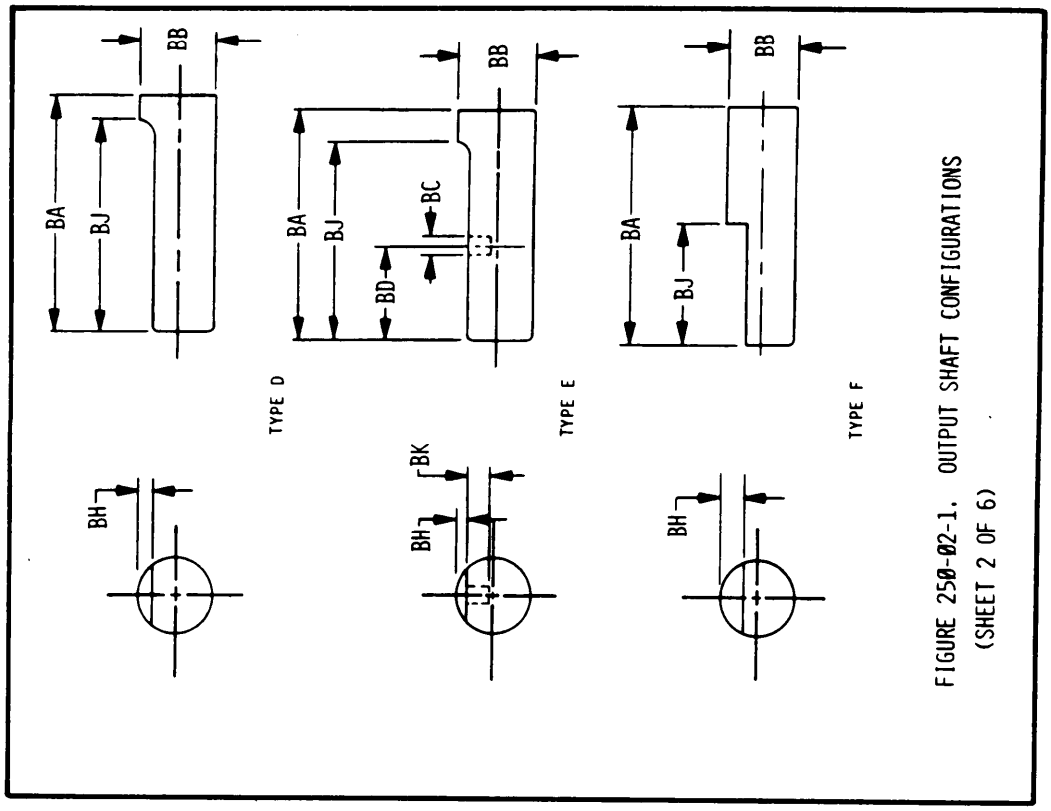


FIGURE 250-02-1. OUTPUT SHAFT CONFIGURATIONS
(SHEET 2 OF 6)

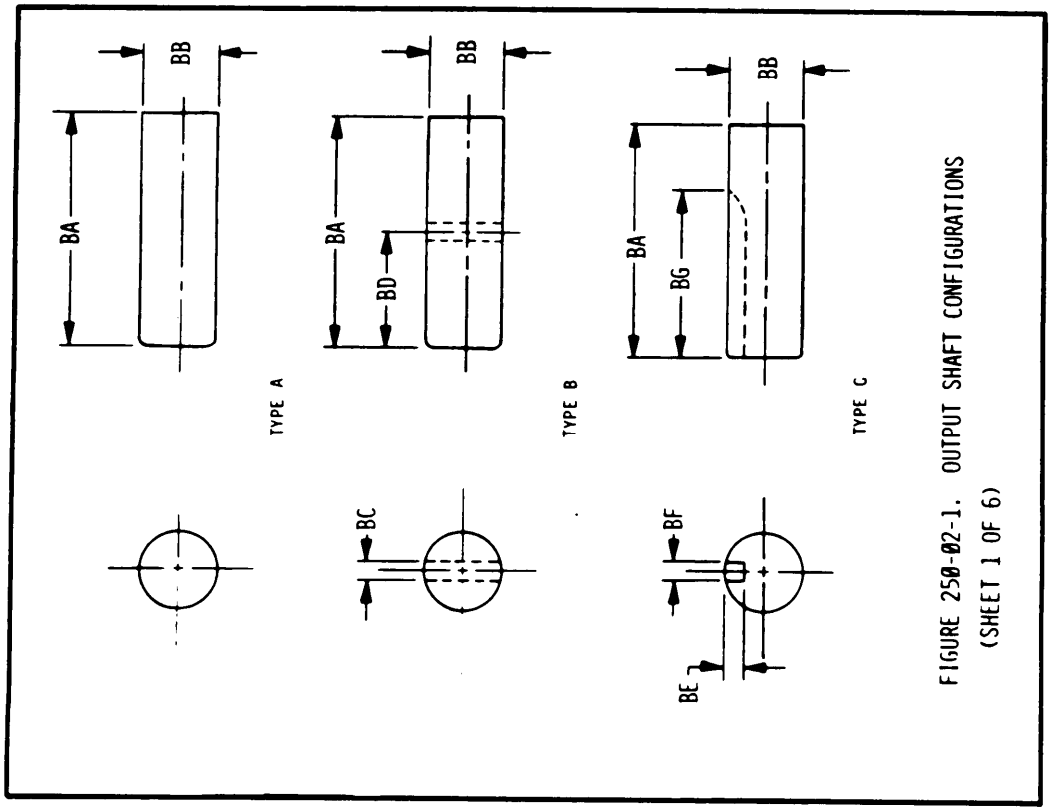


FIGURE 250-02-1. OUTPUT SHAFT CONFIGURATIONS
(SHEET 1 OF 6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

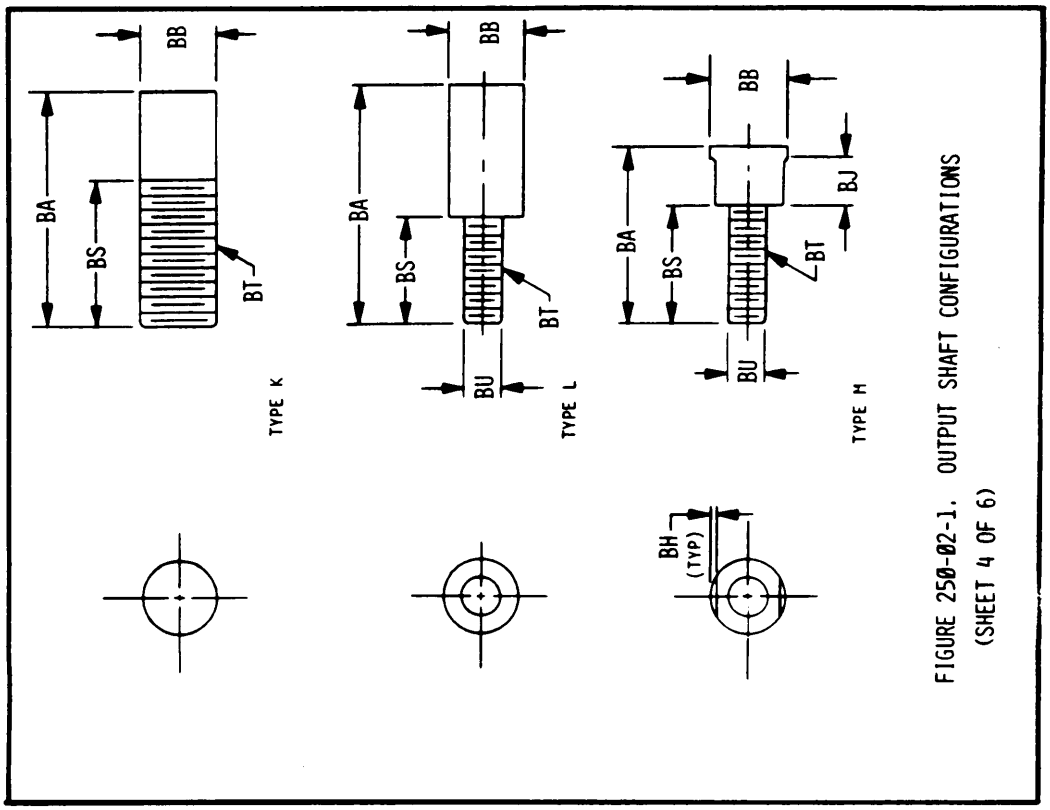


FIGURE 250-02-1. OUTPUT SHAFT CONFIGURATIONS
(SHEET 4 OF 6)

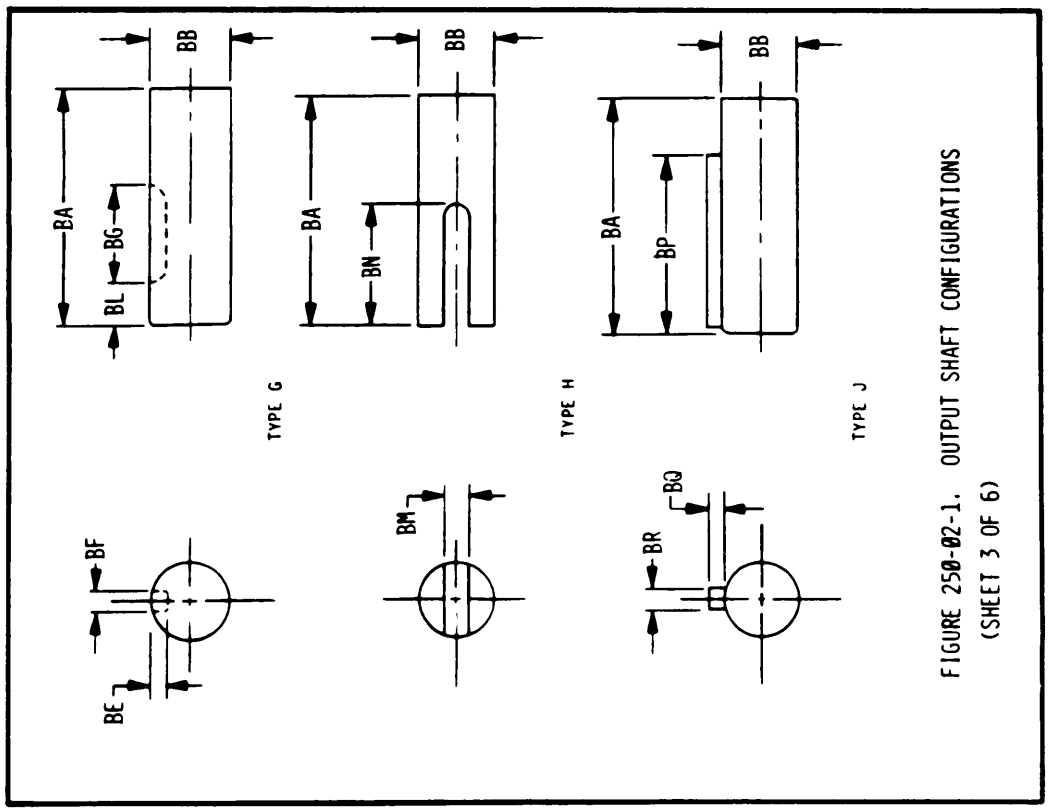


FIGURE 250-02-1. OUTPUT SHAFT CONFIGURATIONS
(SHEET 3 OF 6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

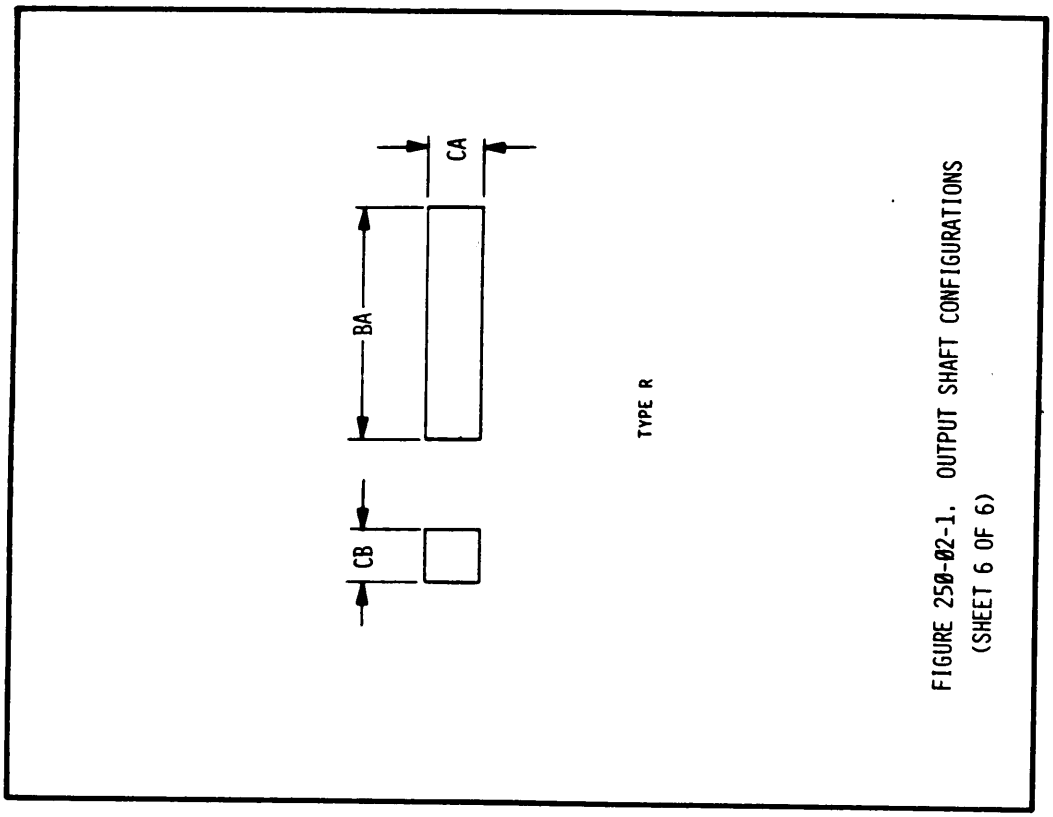


FIGURE 250-02-1. OUTPUT SHAFT CONFIGURATIONS
(SHEET 6 OF 6)

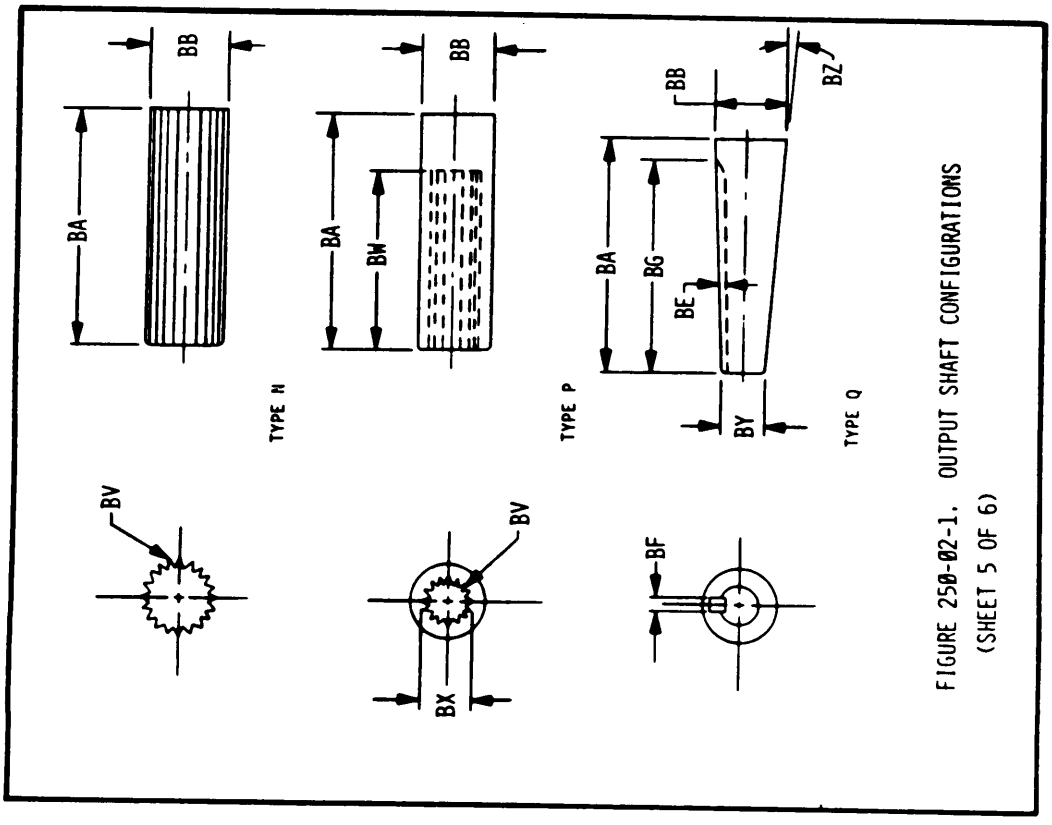


FIGURE 250-02-1. OUTPUT SHAFT CONFIGURATIONS
(SHEET 5 OF 6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET

TITLE CODE (1 2 3 4 5 6) SERIAL NO. (7 8 9 10 11 12)

MICROFILM REQUIRED: YES ☐ NO ☐

REQUESTERS NAME _____

MAILING ADDRESS _____

REVISION TO AEDPS DOCUMENT NO.: ☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐

PHONE NO. A/C _____

ACTUATORS, ELECTROMECHANICAL, ROTARY CHARACTERISTIC NAME	CHAR CODE 13 14 15 16
*DATE	1 Ø Ø 3
*FSCM/CODE IDENT OF REQUESTER	1 Ø Ø 4
*PRIME CONTRACT NUMBER	1 Ø Ø 5
*APPLICABLE GENERAL SPECIFICATION FROM SPECIFICATION TITLE INDEX	1 Ø Ø 6
*ITEM APPLICATION	1 Ø Ø 8
*DRAWING FIGURE NUMBER	1 Ø Ø 9
*COMPLETE THE REQUIRED CODES FROM APPENDIX "A" AND OTHER APPENDICES AND CODES AS REQUIRED TO GENERATE THE DESIRED DOCUMENT	USE BLANK SRS
*DESIGN CHARACTERISTICS - SELECT ONE OR MORE APPROPRIATE CODE(S)	
*SOURCE (SELECT 6873 OR 6874 AND COMPLETE AT LEAST ONE LINE OF THE SOURCE TABLE)	USE BLANK SRS
*FIRST ARTICLE INSPECTION - SELECT THE APPROPRIATE CODE	
*GROUP A INSPECTION - SELECT THE APPROPRIATE CODE	
*GROUP B INSPECTION - SELECT THE APPROPRIATE CODE	
*TEST METHOD - SELECT THE APPROPRIATE CODE	

V A L U E

20 25 30 35 40 45 50 55 60 65 70 75 80

Source: https://assist.dla.mil -- Downloaded: 2026-10-26107:242
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET

TITLE CODE 1 2 3 4 5 6 | SERIAL NO. 7 8 9 10 11 12 | MICROFILM REQUIRED: YES ☐ NO ☐

REQUESTERS NAME _____

MAILING ADDRESS _____

REVISION TO AEDPS DOCUMENT NO.: | | | | | | | | | | | | | | | |

PHONE NO. A/C _____

CHARACTERISTIC NAME	CHAR CODE 13 14 15 16	VALUE 20 25 30 35 40 45 50 55 60 65 70 75 80

SPECIFICATION REQUIREMENT SHEET
TABULATION TABLE

TITLE CODE (1 2 3 4 5 6) SERIAL NO. (7 8 9 10 11 12)

DASH NUMBER	CHARACTERISTIC CODE COL. 13–16	TABULATION CODE AND VALUES COL. 17—	CHARACTERISTIC CODE COL. 13–16	TABULATION CODE AND VALUES COL. 17—	CHARACTERISTIC CODE COL. 13–16	TABULATION CODE AND VALUES COL. 17—	CHARACTERISTIC CODE COL. 13–16	TABULATION CODE AND VALUES COL. 17—	CHARACTERISTIC CODE COL. 13–16	TABULATION CODE AND VALUES COL. 17—	CHARACTERISTIC CODE COL. 13–16	TABULATION CODE AND VALUES COL. 17—	CHARACTERISTIC CODE COL. 13–16	TABULATION CODE AND VALUES COL. 17—	CHARACTERISTIC CODE COL. 13–16	TABULATION CODE AND VALUES COL. 17—	CHARACTERISTIC CODE COL. 13–16	TABULATION CODE AND VALUES COL. 17—	CHARACTERISTIC CODE COL. 13–16	TABULATION CODE AND VALUES COL. 17—
	8000		8051		8102		8153		8204		8255		8306		8357		8408		8459	
01	8001		8052		8103		8154		8205		8256		8307		8358		8409		8460	
02	8002		8053		8104		8155		8206		8257		8308		8359		8410		8461	
03	8003		8054		8105		8156		8207		8258		8309		8360		8411		8462	
04	8004		8055		8106		8157		8208		8259		8310		8361		8412		8463	
05	8005		8056		8107		8158		8209		8260		8311		8362		8413		8464	
06	8006		8057		8108		8159		8210		8261		8312		8363		8414		8465	
07	8007		8058		8109		8160		8211		8262		8313		8364		8415		8466	
08	8008		8059		8110		8161		8212		8263		8314		8365		8416		8467	
09	8009		8060		8111		8162		8213		8264		8315		8366		8417		8468	
10	8010		8061		8112		8163		8214		8265		8316		8367		8418		8469	
11	8011		8062		8113		8164		8215		8266		8317		8368		8419		8470	
12	8012		8063		8114		8165		8216		8267		8318		8369		8420		8471	
13	8013		8064		8115		8166		8217		8268		8319		8370		8421		8472	
14	8014		8065		8116		8167		8218		8269		8320		8371		8422		8473	
15	8015		8066		8117		8168		8219		8270		8321		8372		8423		8474	
16	8016		8067		8118		8169		8220		8271		8322		8373		8424		8475	
17	8017		8068		8119		8170		8221		8272		8323		8374		8425		8476	
18	8018		8069		8120		8171		8222		8273		8324		8375		8426		8477	
19	8019		8070		8121		8172		8223		8274		8325		8376		8427		8478	
20	8020		8071		8122		8173		8224		8275		8326		8377		8428		8479	
21	8021		8072		8123		8174		8225		8276		8327		8378		8429		8480	
22	8022		8073		8124		8175		8226		8277		8328		8379		8430		8481	
23	8023		8074		8125		8176		8227		8278		8329		8380		8431		8482	
24	8024		8075		8126		8177		8228		8279		8330		8381		8432		8483	
25	8025		8076		8127		8178		8229		8280		8331		8382		8433		8484	
26	8026		8077		8128		8179		8230		8281		8332		8383		8434		8485	
27	8027		8078		8129		8180		8231		8282		8333		8384		8435		8486	
28	8028		8079		8130		8181		8232		8283		8334		8385		8436		8487	
29	8029		8080		8131		8182		8233		8284		8335		8386		8437		8488	
30	8030		8081		8132		8183		8234		8285		8336		8387		8438		8489	
31	8031		8082		8133		8184		8235		8286		8337		8388		8439		8490	
32	8032		8083		8134		8185		8236		8287		8338		8389		8440		8491	
33	8033		8084		8135		8186		8237		8288		8339		8390		8441		8492	
34	8034		8085		8136		8187		8238		8289		8340		8391		8442		8493	
35	8035		8086		8137		8188		8239		8290		8341		8392		8443		8494	
36	8036		8087		8138		8189		8240		8291		8342		8393		8444		8495	
37	8037		8088		8139		8190		8241		8292		8343		8394		8445		8496	
38	8038		8089		8140		8191		8242		8293		8344		8395		8446		8497	
39	8039		8090		8141		8192		8243		8294		8345		8396		8447		8498	
40	8040		8091		8142		8193		8244		8295		8346		8397		8448		8499	
41	8041		8092		8143		8194		8245		8296		8347		8398		8449		8500	
42	8042		8093		8144		8195		8246		8297		8348		8399		8450		8501	
43	8043		8094		8145		8196		8247		8298		8349		8400		8451		8502	
44	8044		8095		8146		8197		8248		8299		8350		8401		8452		8503	
45	8045		8096		8147		8198		8249		8300		8351		8402		8453		8504	
46	8046		8097		8148		8199		8250		8301		8352		8403		8454		8505	
47	8047		8098		8149		8200		8251		8302		8353		8404		8455		8506	
48	8048		8099		8150		8201		8252		8303		8354		8405		8456		8507	
49	8049		8100		8151		8202		8253		8304		8355		8406		8457		8508	
50	8050		8101		8152		8203		8254		8305		8356		8407		8458		8509	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 1426 82 MAR

PREVIOUS EDITION IS OBSOLETE.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Missile Command
ATTN: AMSMI-RCS
Redstone Arsenal, AL 35809

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.