MIL-STD-35-73(MI)

10 MAY 1974

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

ACTUATORS, ELECTROMECHANICAL, LINEAR

FSC-EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL COMMAND
WASHINGTON, D.C. 20315

Automated Engineering
Document Preparation System
MIL-STD-35-73(MI)

1. This Military Standard is approved by the U.S. Army Materiel Command, Department of the Army and is mandatory for use by all its activities. All other military activities are required to employ this Standard where suitable.

2. Recommended corrections, additions, or deletions should be addressed to Commander, U.S. Army Missile Command, ATTN: AMSMI-RCS, Redstone Arsenal, Alabama 35809.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of MIL-STD-35-73(MI) is to facilitate the preparation of Military Specification Exceptions for Actuators, Electromechanical, Linear.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the basic MIL-STD-35, along with MIL-STD-35-1 for Materials, and MIL-STD-35-2 for Finishes.

3. It is important that the Procedure described in the basic document (MIL-STD-35) be followed explicitly in order for the computer to produce a document suitable for competitive procurement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION	TITLE	PAGE
1.0	Actuators, Electromechanical, Linear	1
1.1	Specification Title Index	3
1.2	Specification Requirements Instructions	5
1.2.1	General	5
1.2.1.1	Tabulation Table	6
1.2.2	Effectivity of Data	10
1.2.3	Writing Methodology	10
1.2.4	Characteristic Codes and Characteristic Value Codes	11
1.2.5	Actuator Characteristics	13
1.2.6	Dimensions and Drawings	13
1.2.7	Materials and Finishes	13
1.2.8	Additional Requirements, Marking, Packaging, Quality Assurance, and Notes	14
1.2.9	Applicable Documents	15
1.2.10	Quality Assurance and Conformance	17
1.2.11	Detailed Requirements	17
1.2.12	Date	18
1.2.13	FSCM/Code Ident of Requester	18
1.2.14	Prime Contract Number	18
1.2.15	Applicable General Specification	18
1.2.16	Generated Document	18
1.2.17	Item Application	18

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS (CONT.)

SECTION	TITLE	PAGE
1.2.18	Drawing Figure Number	19
1.2.19	Dimensions	19
1.2.20	Design Characteristics	19
1.2.20.1	Starting Current	19
1.2.20.2	Operating Current	19
1.2.20.3	Operating Stroke	19
1.2.20.4	Operating Rate	20
1.2.20.5	Maximum Overtravel	20
1.2.20.6	Maximum End Play	20
1.2.21	Actuator Materials	20
1.2.22	Actuator Finishes	22
1.2.23	Rated Loads	23
1.2.24	Maximum Operating Load	23
1.2.25	Stall Load	24
1.2.26	Static Limit Load	24
1.2.27	Ultimate Static Load	24
1.2.28	Load Limiting	25
1.2.29	Antirotational Devices	25
1.2.30	Operating Stroke Adjustments	25
1.2.31	Nonjamming Mechanical Stops	26
1.2.32	Reversibility	26
1.2.33	Movable End Fittings	26

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS (CONT.)

SECTION	TITLE	PAGE
1.2.34	Operating Temperature	26
1.2.35	Storage Temperature	26
1.2.36	Weight	27
1.2.37	Input Power	27
1.2.38	Motor	27
1.2.39	Electrical Connectors	27
1.2.40	Electrical Wiring	28
1.2.41	Electrical Connections	28
1.2.42	Limit Switches	28
1.2.43	Thermal Protection	28
1.2.44	Position Transmitters	29
1.2.45	Locking of Parts	29
1.2.46	Housing	29
1.2.47	Lubrication	29
1.2.48	Retaining Rings	30
1.2.49	Spring Pins	30
1.2.50	Rated Life	30
1.2.51	Rated Duty Cycle	31
1.2.52	Nameplate and Product Marking	31
1.2.53	Hiring Diagram Nameplate	31
1.2.54	Motor Data Nameplate	31
1.2.55	Lubrication Data Nameplate	32

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS (CONT.)

SECTION	TITLE	PAGE
1.2.56	Interference (Conducted)	32
1.2.56.1	Test Methods	32
1.2.56.2	Requirements	32
1.2.57	Interference (Radiated)	33
1.2.57.1	Test Methods	33
1.2.57.2	Requirements	33
1.2.58	Electrical and Environmental Test Methods and Requirements	34
1.2.58.1	Test Methods	34
1.2.58.2	Requirements	35
1.2.59	Workmanship	35
1.2.60	Sources	36
1.2.61	Supersession Data	37
1.2.62	Material and Process Substitution	37
1.2.63	Test Data and Test Methods	37
1.2.64	Specification Requirements, Appendices and SRS	38
1.2.65	Specification Requirements Sheet (SRS) Form	38
1.2.66	Searching for Existing Documents	39
1.2.66.1	General Requirements	39
1.2.66.2	Instructions	39
Specification	Requirements	41-102

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS (CONT.)

SECTION	TITLE	PAGE
	Quality Assurance Requirements	103-110
	Special Requirements	111, 112
	Table I. Actuator Materials Table	113
	Table II. Actuator Finishes Table	114
	Appendices	115-132
1.3	Configuration and Drawings	133
1.3.1	Figure Titles vs Figure Numbers	135
1.3.2	Legend Index	137, 138
	Figures 251-01-1 thru 251-01-12	139-144
	Reproducible Foldout Specification Requirement Sheet (SRS) Forms	145, 147
	Reproducible Foldout Specification Requirement Sheet Tabulation Table	149

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 1.0

ACTUATORS, ELECTROMECHANICAL, LINEAR

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 1.1

SPECIFICATION TITLE INDEX

Specification Title Code*	Specification Title	Applicable Specification
251001	Actuators and Actuating Systems, Aircraft, Electromechanical	MIL-A-8064
251002	Actuators, Electromechanical, Linear	MIL-A-23622

* NOTE - The six (6) digits of this title code are placed in the first six (6) digits of the simplified SRS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 1.2

SPECIFICATION REQUIREMENTS INSTRUCTIONS

1.2.1 General

The purpose of this instruction is to establish the procedures to be followed, and the format to be used, for submission of requirements to obtain a computer generated procurement document.

Requirement definition Is through the use of a Specification Requirement Sheet (SRS). Requirements are shown in the Specification Requirements List (pages 41 through 102). The characteristic codes and values for these requirements are entered on the SRS (pages 145 and 147). Besides assisting the user in preparing his requirements for coverage by the Automated Engineering Document Preparation System (AEDPS), the SRS is used in formulating instructions to the computer.

Certain characteristic codes are mandatory to the preparation of a document by the computer. The designation for mandatory characteristic codes will be an asterisk (*) before the characteristic name. If the asterisk is at the far left edge, it is fully mandatory to get a satisfactory document. For example, Codes 1003 through 1009 must be completed. If the asterisk is by an indentured item, it is mandatory only for the item above that is not indentured to the same extent. For example, if Code 1754 is desired, Code 1756 must also be completed. Most characteristic codes will generate paragraphs. Other characteristic codes will be required for comparison purposes only or for inclusion in separate characteristic tables.

The document generated by the AEDPS automatically refers to the referenced specification for established requirements and mandatory tests. If added tests or changes to existing tests are required, the requirements for these tests must be specified. This can be accomplished by selecting the proper codes from the Specification Requirements List and completing the required Appendix.

Reproducible copies of the SRS are located immediately following the Figures in each Section. They are to be locally reproduced and used for submittal of request for documentation.

Characteristics that are nonabsolutely essential for proper identification and establishment of requirements should be omitted. Many non-standard items become cost prohibitive through OVER-SPECIFYIN6. When the requirements and tests in the specification referenced with Code 1006 meet the user’s requirements, parameters (codes) which are

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

void of an asterisk (*), at the far left edge of the Specification Requirements List, should not be used.

1.2.1.1 Tabulation Table

The AEDPS has the capability for documenting a number of parts on a single specification. This subparagraph provides the instructions necessary to use this capability. A removable foldout Tabulation Table form is furnished following the SRS forms located in Section 1.3. This form is to be locally reproduced for use in submitting requests for computer generated Military Specification, Exceptions. An example of Tabulation Table usage is detailed in the following paragraphs.

The Tabulation Table provides the capability for tabulation of 50 items and up to 10 variables per item. The SRS form may be used in lieu of the Tabulation Table for reasons of convenience or necessity due to write-in space limitations. If the SRS form is used, each pertinent Characteristic Code and corresponding value(s) must be transposed to the SRS using the rules outlined in 1.2.1.

In using the Tabulation Table, for example, it may be required that several actuators be specified, all having the same electrical characteristics but different operating temperature ranges. Each actuator will then be identified by a dash number assigned to the generated document basic part number, such as 01 through 03 as shown in the Tabulation Table illustration. On the Tabulation Table adjacent to Code 8000 is entered the Characteristic Code used to designate the minimum operating temperature and adjacent to Code 8051 is entered the Characteristic Code used to designate the maximum operating temperature; in this case, Codes 1662 (minimum) and 1660 (maximum). Adjacent to each subsequent Characteristic Code in the first column is entered the desired minimum operating temperature value (degrees C), and adjacent to each subsequent Characteristic Code in the second column is entered the desired maximum operating temperature value (degrees C).

The Tabulation Table may also be used for tabulating dimensions from Appendix A. From the above example, it may be required that each actuator's body length be different. Body length for actuator figures is represented by the legend letters "AA" and Characteristic Code 1010 in Appendix A. It is not necessary to write in the code for legend "AA" on the Tabulation Table, but it is necessary to specify the Characteristic Codes representing the minimum and/or the maximum dimensions. Minimum body length, Code 1011, is entered adjacent to Code 8102 and/or maximum body length, Code 1012, is entered adjacent to Code 8153. The minimum dimensional value for the dash-number 01 item is then specified with Code 8103 and the maximum dimensional value is specified with Code 8154,

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

as applicable. Applicable dimensions or other values not requiring tabulation shall be specified on the SRS along with applicable code(s) (see 1.2.1).

The following will illustrate the proper usage of the Tabulation Table and Characteristic Codes far the example described above.

DASH NUMBER	CHARACTERISTICS CODE COL. 13-16	TABULATION CODE AND VALUES COL. 17-	CHARACTERISTICS CODE COL. 13-16	TABULATION CODE AND VALUES COL. 17-	CHARACTERISTICS CODE COL. 13-16	TABULATION CODE AND VALUES COL. 17-	CHARACTERISTICS CODE COL. 13-16	TABULATION CODE AND VALUES COL. 17-
	8000	1662 #	8051	1660 #	8102	1011 #	8153	1012 #
01	8001	-55 #	8052	85 #	8103	4.25 #	8154	4.75 #
02	8002	-65 #	8053	125 #	8104		8155	3.686 #
03	8003	-65 #	8054	200 #	8105	8.935 #	8156	8.941 #
04	8004		8055		8106		8157	
05	8005		8056		8107		8158	
06	8006		8057		8108		8159	

In addition to applicable dimensional values from Appendix A, the following is a list of Characteristic Codes and titles that are candidates for Tabulation Table usage within the scope of this document.

ACTUATORS, ELECTROMECHANICAL, LINEAR

Characteristic Code	Title
1006	Applicable General Specification
1009	Drawing Figure Number
4400	Starting Current (amperes) Minimum
4402	Starting Current (amperes) Maximum
4404	Starting Current (milliamperes) Minimum
4406	Starting Current (milliamperes) Maximum
4408	Operating Current (amperes) Minimum
4410	Operating Current (amperes) Maximum

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

ACTUATORS, ELECTROMECHANICAL, LINEAR (CONT.)

Characteristic Code	Title
4412	Operating Current (milliamperes) Minimum.
4414	Operating Current (milliamperes) Maximum
4416	Operating Stroke (inches) Minimum
4418	Operating Stroke (inches) Maximum
4420	Operating Rate (inches per second) Minimum
4422	Operating Rate (inches per second) Maximum
4424	Overtravel (inches) Maximum
4426	End Play (inches) Maximum
1562	Rated Load (pounds)
1564	Rated Load (amperes)
1566	Rated Load Both Aiding and Opposing (pounds)
1568	Rated Load Both Aiding and Opposing (amperes)
1570	Maximum Operating Load (pounds)
1572	Maximum Operating Load (amperes)
1574	Stall Load (pounds)
1576	Stall Load (amperes)
1580	Static Limit Load (times rated load)
1582	Static Limit Load (percent of maximum operating load)
1590	Ultimate Static Load (percent of static limit load)
1592	Ultimate Static Load (pounds)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

ACTUATORS, ELECTROMECHANICAL, LINEAR (CONT.)

Characteristic Code	Title
1594	Actuator Extended Length Under Ultimate Static Load (inches)
1600	Load Limiting (pounds)
1602	Load Limiting (percent relative to maximum operating load of motor)
1620	Operating Stroke Adjustments (inches)
1638	Movable End Fitting Rotational Adjustment (degrees)
1640	Movable End Fitting Linear Adjustment (inches)
1644	Actuator Maximum Weight (ounces)
1646	Actuator Maximum Weight (pounds)
1650	Input Power (volts DC)
1652	Input Power (volts AC)
1654	Input Power Frequency (hertz)
1656	Input Power (phase)
1658	Input Power Source (category)
1660	Maximum Operating Temperature (degrees C)
1662	Minimum Operating Temperature (degrees C)
1680	Electrical Connector Specification
1682	Electrical Wiring Specification
1686	Minimum Wire Size (AWG)
1690	Electrical Connections Specification
1702	Limit Switches Specification

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

ACTUATORS, ELECTROMECHANICAL, LINEAR (CONT.)

Characteristic Code	Title
1712	Position Transmitter Specification
1722	Self-Locking Nut Specification
1734	Lubrication Specification
1750	Rated Life (number of full stroke cycles)
1754	Duty Cycle (seconds) On
1756	Duty Cycle (seconds) Off

1.2.2 Effectivity of Data

Preparation of an acceptable computer generated document is dependent upon clear, accurate, complete, and concise delineation of the requirements on the SRS. The information provided on the SRS is furnished directly into the computer and any inaccuracies or inadequacies in the data submitted will directly affect the computer generated document.

1.2.3 Writing Methodology

The following rules govern the write-in of values on the SRS and applicable appendices:

a. Only block lettering shall be used.

b. The letter “O” shall be a round circle.

c. The numeral zero shall be a round circle with a diagonal line through it “0”.

d. The letter “I” shall have pronounced serifs top and bottom.

e. The numeral “one” shall be a straight vertical line “|”.

f. The letter “Z” shall have a horizontal line through it “Z”.

g. The “±” sign or the words “plus or minus” shall not be used. “+ or -” should be the form used, if needed.

h. The signs “$”, “¢”, or “!” shall never be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

i. Except for materials (MIL-STD-35-1) and finishes (MIL-STD-35-2), abbreviations conforming to MIL-STD-12 may be used for reasons of convenience or write-in space limitations.

j. The pound sign "#" must never be used, except to indicate the end of a value or write-in, where it must always be used. If the last character of the write-in should fall in column 79 of the SRS, the pound sign "#" should not be placed in column 80. Anew line should be started by placing a "1" in column 80 of the first line, a "2" in column 80 of the second line, and the pound sign "#" entered in column 17 of the second line (a write-in shall never exceed 3 lines on the SRS as this is equal to the 189 character write-in limit).

k. All fractions must be specified in decimal form. All values less than one (1.0) must be preceded by the numeral 0; i.e., 0.375.

l. When a write-in value is used to express percentage, the value must be followed by the word "percent", and not the sign "%". If (percent) is shown in the Specification Requirements, the word should not be repeated on the SRS.

m. When a write-in value is used to express temperature in degrees C (Celsius), the value must be followed by the word "degrees C" and not the sign "°C". If degrees C is shown on the Specification Requirements List as (degrees C), the word need not be repeated on the SRS as it will be provided automatically in the generated document.

n. The minus sign "-" must be used with negative numerical values; for example, to express a temperature that is "12 below zero" (degrees C), the written-in value must be preceded by the minus sign "-12"; but, the plus sign "+" shall not be used with positive numerical values.

o. When it is required to express an exponential value on the SRS, such as 2.0×10^5, the value shall be written as follows: "2.0 X 10 TO THE 5TH POWER".

1.2.4 Characteristic Codes and Characteristic Value Codes

Each characteristic name which defines a requirement has been assigned a code number for use in the computer. These codes are referred to as characteristic codes, and are a numeric value, therefore all characteristic codes must have the zeroes slashed with a diagonal line

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

(0) when entered on the SRS. Additional characteristic codes which are required to further define an item as contained in the appendices to the Specification Requirements. These are:

Dimension Legends	Appendix A (see 1.2.6)
Applicable Documents Table	Appendix B (see 1.2.9)
First Article Inspection Table	Appendix C (see 1.2.10)
Group A Quality Conformance Table	Appendix D (see 1.2.10)
Group B Quality Conformance Table	Appendix E-1 (see 1.2.10)
Group B Quality Conformance Table	Appendix E-2 (see 1.2.70)
Group C Quality Conformance Table	Appendix F (see 1.2.10)
Quality Conformance Sequence Table	Appendix G (see 1.2.10)
Deleted Test Table (Groups A, B, and C)	Appendix H (see 1.2.10)
Deleted First Article Tests	Appendix J (see 1.2.10)
Source Tabulation Table	Appendix S (see 1.2.60)

Note: It is not necessary to complete each Characteristic Code on each line of the Appendices or Tables. For example, if Code 6125 is used in Appendix C, Codes 6126, 6127, and 6128 need not be used on the SRS if no value or write-in is to be specified with these Codes. When the computer document is generated, printouts of specified Tables and Appendices will be similar in format to those shown in this document. Therefore, a blank space will be provided in that column and line where a Characteristic Code and value are not specified.

Specification titles, materials, and finishes have been assigned code numbers for computer use. These are referred to as Characteristic Value Codes. The Characteristic Value Codes required for completing the SRS are located as follows:

Specification Titles	Section 1.1
Materials	MIL-STD-35-1
Finishes	MIL-STD-35-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.5 Actuator Characteristics

The actuator characteristics are tabulated in the Specification Requirements List (SRL).

1.2.6 Dimensions and Drawings

Dimensional Data must be supplied for all legends applicable to the actuator selected in Section 1.3. All values must be in inches and must be in numerical decimal form. All values less than one (1.0) must be preceded by the numeral 0; i.e., 0.375. The Dimension Table and related Characteristic Codes are provided as Appendix A. Both the minimum and maximum values and the legend letters shall be specified, as applicable. It is not necessary to complete each line or the entire Appendix A, use only those codes that are applicable to the Drawing Figure selected. When Appendix A is used with the SRS, Characteristic Codes representing the applicable legend letters must be placed on the SRS as well as the code number for the minimum and/or maximum dimensional data specified. If Appendix A is used in conjunction with the Tabulation Table, it is not necessary to specify the legend letter code, only the dimensional data code(s). For "reference", "nontolerance", and "thread dimensions", the dimension shall be placed in the minimum column and "REF", "NTOL", or thread type, such as "UNC" or "NEF", shall be entered in the maximum column. If length of thread is necessary, it must be entered in the minimum column; for example, 6-32X0.250.

Caution: When a Figure is shown in the Configuration and Drawing Section that might need a minor change, a copy of the marked up figure may be submitted with the SRS. When there is no figure shown that can be used without a major change, do not proceed. To have an unlisted item covered, a drawing with all dimensions must be furnished USAMICOM, Attn: AMSMI-RCS. A drawing with legend letters will be prepared, assigned a figure number, and returned to the requester.

Dimensional Data may be tabulated by using the Tabulation Table form provided in this document. Usage of this table is detailed in 1.2.1.1.

1.2.7 Materials and Finishes

Whenever the Specification Requirements reference a material or finish, its code may be entered on the SRS with the 6 digit Characteristic Value Code from the left-hand column of MIL-STD-35-1, or MIL-STD-35-2, as applicable. The material or finish nomenclature shown in the center column will be the exact words that will appear in the generated document. When a material or finish specification is desired, it may be entered on the SRS with the applicable code from the Specification Requirements. Documents other than those specified in the right-hand column of

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

MIL-STD-35-1 and MIL-STD-35-2 may be used, if necessary. Any document referenced must also be entered on the SRS with a code from Appendix B.

Note: When a desired material or finish is not shown, the system has the capability for accepting write-ins; i.e., "Steel" may be shown as a material and "Tin" may be shown as a finish.

To have an unlisted material or finish added to MIL-STD-35-1 or MIL-STD-35-2, the nomenclature and any applicable specifications for the desired material or finish must be furnished to USAMICOM, Attn: AMSMI-RCS. The assigned Characteristic Value Codes will be returned to the requester.

1.2.8 Additional Requirements, Marking, Packaging, Quality Assurance, and Notes

Computer generated documents have the capability of accepting additional write-ins, over and above the parameters specified in the Specification Requirements by specific Characteristic Codes. These write-ins will appear in the completed document as Section 3 for the Requirements and Marking, Section 4 for the Quality Assurance, Section 5 for the Packaging, and Section 6 for the Notes. Codes to be used are as follows:

Requirements	7001 through 7005
Marking	6991 through 6995
Quality Assurance	7011 through 7015
Packaging	7006 through 7010
Notes	7016 through 7020

These should be completed on the SRS using the codes shown above. The write-ins should be in the exact words desired, but limited to 189 characters (including spaces and punctuation marks) for each characteristic code. When an additional requirement is added in Codes 7001 through 7005, an additional test is usually required (Codes 7011 through 7015).

Computer generated documents on actuators will automatically have a requirement to package them in accordance with the specification shown with Code 1006. If there are additional packaging requirements, these should be added through the use of Codes 7006 through 7010.

If additional notes are required in Section 6, these should be stated using Characteristic Codes 7016 through 7020.

Part marking shall be in accordance with the document shown with Code 1006. Additional marking requirements may be specified on the SRS with appropriate codes between 6991 and 6995.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1 .2.9 Applicable Documents

Any specification or other document entered as a characteristic value for any Characteristic Code must also be listed with a code from Appendix B, in its proper numerical sequence. Only the number is required. Specification and/or document number entries shall be void of blank spaces; i.e., a number, letter, or punctuation mark must occupy every space from the beginning to the end of the entry. For example, MIL-STD-462 must be entered on the SRS as: 2504MIL-STD-462#. It is not necessary to list titles.

In addition to the above, add the below-listed documents when the indicated codes are used:

Document (Subject)		Code (Test)
MIL-M-7969 (AC Motors)	1674	(Motor)
	1676	(Motor)
MIL-M-8609 (DC Motors)	1670	(Motor)
	1672	(Motor)
MS16624 (Basic External Retaining Ring)	1740	(Retaining Rings)
MS16625 (Basic Internal Retaining Ring)	1740	(Retaining Ring)
MS20995 (Safety or Lock Wire)	1726	(Locking of Parts)
MS33540 (Safety Wiring and Cotter Pinning)	1726	(Locking of Parts)
MS33547 (Spring Pins)	1748	(Spring Pins)
MIL-STD-105 (Sampling Procedures and Inspection Tables)	7033	(Group A Sampling Plan)
	7044	(Group B Inspection)
MIL-STD-130 (Identification Marking)	1760	(Nameplate and Product Marking)
MIL-STD-461 (Electromagnetic Interference Characteristics)	2512	(Interference, Conducted)
	2514	(Interference, Conducted)
	2530	(Interference, Radiated)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Document (Subject)	Code (Test)	
MIL-STD-462 (Electromagnetic Interference Characteristics)	2504	(Interference, Conducted)
	2506	(Interference, Conducted)
	2524	(Interference, Radiated)
MIL-STD-704 (Electric Power)	1658	(Input Power)
MIL-STD-810 (Environmental Test Methods)	1784	(Altitude)
	1786	(Altitude)
	1855	(High Temperature)
	1856	(High Temperature)
	1923	(Low Temperature)
	2004	(Temperature Shock)
	2043	(Rain)
	2246	(Explosive Atmosphere)
	2248	(Explosive Atmosphere)
	2250	(Explosive Atmosphere)
	2334	(Acceleration)
	2454	(Combined Temperature-Humidity-Altitude)
	2604	(Humidity)
	2606	(Humidity)
	2608	(Humidity)
	2610	(Humidity)
	2612	(Humidity)
	2703	(Fungus Resistance)
	2754	(Salt Fog)
	2024	(Dust)
	2884	(Leakage, Immersion)
	2886	(Leakage, Immersion)
	2953	(Vibration)
	3036	(Acoustical Noise)
	3038	(Acoustical Noise)
	3040	(Acoustical Noise)
	3042	(Acoustical Noise)
	3104	(Shock)
FED-STD-595 (Color)	4548, 4558, 4568, 4578, 4588, 4598, 4608, 4618, 4628, 4638, 4648, 4658	(Finishes)
H4-1 (FSCM, USA and Canada, Name to Code)		(Source Table or Source Tabulation Table)
NAS561 (Spring Pins)	1774	(Spring Pins)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.10 Quality Assurance and Conformance

Quality Assurance requirements are mandatory to the preparation of an acceptable final document. Appendices C, D, E, F, G, H, and J are to be used when making changes to the First Article, Group A, B, and C inspections. Unless modified, these inspections will be in strict accordance with the procedures outlined in the applicable general specification. If it is desired to add, delete, or modify the tests or sequence in any manner, the exceptions must be specified on the SRS with codes from the Quality Assurance Requirements and/or the applicable appendices. One requirement must be selected from each of Groups A, B, and C. Enter an "X" in the value column by the selected Characteristic Code.

If Appendix D is used with Code 7031, the last three columns should be used to specify the sampling plan. If sampling, as specified in MIL-STD-105, is to be used, use Code 7033 with an "X" and specify the inspection level in the Quantity Inspected column and the applicable AQL's in the "AQL" columns. The generated document will specify normal inspection, single sampling. If 10 percent sampling is to be used, use Code 7034 with an "X" and specify 100 percent in the Quantity Inspected column. If a limit is to be placed on the percent defective for 100 percent inspection, use Code 7035 and specify the maximum percent defective. If the tests to be performed are to be divided into subgroups, use Code 7036 with an "X"; the subgroup number should be shown in the Title column, and the sampling plan applicable to all tests in the subgroup should be shown in the remaining columns. The tests that make up the subgroup should be listed, in the order they are to be performed, in the Title column. The generated document will specify that all tests listed under a subgroup will be combined and inspected per the sampling plan specified.

Military Specification Exceptions will eliminate requirements for Qualification.

1.2.11 Detailed Requirements

A Specification Title Index (Section 1.1) with Characteristic Value Codes has been established for each title and the related applicable general specification. The Characteristic Value Code for the actuator title selected must be entered in the title code block at the top of each page of the SRS. The six digits of the serial number shall be shown and may be used for user internal control.

Caution: When there is no suitable Specification Title Code, do not proceed. To have a Specification Title Code assigned, a request must be forwarded to USAMICOM, Attn: AMSMI-RCS, giving the desired title along with the related applicable general specification. A code will be assigned and returned to the requester.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.12 Date

The date the user desires to appear on his generated document must be written in military format with Code 1003 on the SRS; i.e., 3 July 1973. Do not abbreviate month or year (a space must appear between date, month, and year).

1.2.13 FSCM/Code Ident of Requester

The requester's Federal Supply Code for Manufacturers (FSCM) shall be entered on the SRS with Code 1004. The FSCM can be obtained from Cataloging Handbook H4-1 when unknown.

1.2.14 Prime Contract Number

It is necessary for statistical purposes to have the contract number of the prime contract entered on the SRS with Code 1005. If the contract number is unknown, the requester's Contracts Department can furnish it. For government use, the abbreviated proper name and office symbol shall be used; i.e., "USAMICOM, AMSMI-RCS".

1.2.15 Applicable General Specification

The applicable general specification is the document to which an exception is being taken and can be found in the Specification Title Index in this Standard. The specification must be entered on the SRS with Code 1006 (the slash sheet, MS number, or part number should be entered, if applicable, to identify the item). The number must also be entered on the SRS with the appropriate code from Appendix B (without slash or part number). If MS numbers are used, these must also be shown on the SRS with codes from Appendix B. An example of how multiple numbers are to be shown with Code 1006 on the SRS is as follows: "MIL-A-23622, MS18037/1". Only the portion that is underlined in the example should be used with codes from Appendix B on the SRS.

1.2.16 Generated Document

The generated document provides exceptions to an existing specification. The existing specification details will be binding unless the generated document makes an exception. The combined provisions, requirements, and tests of the two documents will then be the document for procurement.

1.2.17 Item Application

Code 1008 must show item application such as: next assembly drawing number or type of equipment; i.e., AN/GRC-19, MISSILE X, etc.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.18 Drawing Figure Number

Code 1009 must show the figure number selected from Section 1.3.

1.2.19 Dimensions

Use Appendix A to complete the SRS with the required dimensions (see 1.2.6).

1.2.20 Design Characteristics

It is mandatory to specify design characteristics on the SRS by using at least one of the following.

1.2.20.1 Starting Current

Starting current may be specified in amperes or in milliamperes by using one of the following:

a. Write in the minimum value (amperes) with Code 4400, or write in the maximum value (amperes) with Code 4402, or write in both the minimum and the maximum value (amperes) with Codes 4400 and 4402, respectively.

b. Milliamperes. Write in the minimum value (milliamperes) with Code 4404, or write in the maximum value (milliamperes) with 4406, or write in both the minimum and the maximum values (milliamperes) with Codes 4404 and 4406, respectively.

1.2.20.2 Operating Current

Operating current may be specified in amperes or in milliamperes by using one of the following:

a. Amperes. Write in the minimum value (amperes) with Code 4408, or write in the maximum value (amperes) with Code 4410, or write in both the minimum and the maximum values (amperes) with Codes 4408 and 4410, respectively.

b. Milliamperes. Write in the minimum value (milliamperes) with Code 4412, or write in the maximum value (milliamperes) with Code 4414, or write in both the minimum and the maximum values (milliamperes) with Codes 4412 and 4414; respectively.

1.2.20.3 Operating Stroke

Operating stroke may be specified by writing in the minimum value (inches) with Code 4416, or by writing in the maximum value (inches) with

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 4418, or by writing in both the minimum and the maximum values (inches) with Codes 4416 and 4418, respectively.

1.2.20.4 Operating Rate

Operating rate may be specified by writing in the minimum value (Inches per second) with Code 4420, or by writing in the maximum value (inches per second) with Code 4422, or by writing in both the minimum and the maximum values (inches per second) with Codes 4420 and 4422, respectively.

1.2.20.5 Maximum Overtravel

Maximum overtravel may be specified by writing in the maximum value (inches) with Code 4424.

1.2.20.6 Maximum End Play

Maximum end play may be specified by writing in the maximum value (inches) with Code 4426.

1.2.21 Actuator Materials

Actuator materials may be specified on the SRS by generating the Actuator Materials Table (refer to Table I, located before the appendices).

This table provides the capability to specify material for from one to twelve components. For each code used from the Component column, a corresponding code must be used from the Material column. If desired, one or more of the corresponding codes in the remaining columns (Specification, Number or Alloy Number, Condition or Temper, Form, Class, Grade, Type, and Composition) may also be used. (See Note in 1.2.4 for explanation of blank columns in tables.)

For the first component and material to be specified, use the instructions following:

a. Component. Write in the component nomenclature with Code 5080.

b. Material. Enter the assigned Characteristic Value Code found MIL-STD-35-1 with Code 5081. (See 1.2.7)

c. Specification. If it is desired to specify a specification for the material selected, enter the specification number found in MIL-STD-35-1 with Code 5082. If no specification is listed, or a specification other than the one listed is required, write in the specification number with Code 5082. (See 1.2.7)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

d. Number or Alloy Number. If it is desired to specify number or alloy number, write in the number with Code 5083.

e. Condition or Temper. If it is desired to specify condition or temper, write in the condition or temper designation with Code 5084.

f. Form. If it is desired to specify form, write in the form designation with Code 5085.

g. Class. If it is desired to specify class, write in the class designation with Code 5086.

h. Grade. If it is desired to specify grade, write in the grade designation with Code 5087.

i. Type. If it is desired to specify type, write in the type designation with Code 5088.

j. Composition. If it is desired to specify composition, write in the composition designation with Code 5089.

Repeat the above procedure for any additional components and materials required, starting with the next available code from the Component column (Codes 5090, 5100, etc.).

The following is an example of SRS entries which might be made to specify materials for housing and rollpin.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.22 Actuator Finishes

Actuator finishes may be specified on the SRS by generating the Actuator Finishes Table (refer to Table II, located before the appendices).

This table provides the capability to specify finish for from one to twelve components. For each code used from the Component column, a corresponding code must be used from the Component Surface and Finish columns. If desired, one or more of the corresponding codes in the remaining columns (Specification, Class, Type, Grade, Color Name or Number from FED-STD-595, and Maximum and/or Minimum Thickness) may also be used. (See Note in 1.2.4 for explanation of blank columns in tables.)

For the first component and finish to be specified, use the instructions following:

a. Component. Write in the component nomenclature with Code 4541.

b. Component Surface. Write in the component surface to be finished with Code 4542.

c. Finish. Enter the assigned Characteristic Value Code found in MIL-STD-35-2 with Code 4543. (See 1.2.7)

d. Specification. If it is desired to specify a specification for the finish selected, enter the specification number found in MIL-STD-35-2 with Code 4544. If no specification is listed, or a specification other than the one listed is required, write in the specification number with Code 4544. (See 1.2.7)

e. Class. If it is desired to specify class, write in the class designation with Code 4545.

f. Type. If it is desired to specify type, write in the type designation with Code 4546.

g. Grade. If it is desired to specify grade, write in the grade designation with Code 4547.


h. Color. If it is desired to specify color, either write in the color name or write in the color number found in FED-STD-595 (see 1.2.7) with Code 4548.

i. Thickness. If it is desired to specify finish thickness, write in the maximum value (inch) with Code 4549 or write in the minimum value (inch) with Code 4550, or write in both the maximum and minimm values (inch) with Codes 4549 and 4550, respectively.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Repeat the above procedure for any additional components and finishes required, starting with the next available code from the Component column (Codes 4551, 4561, etc.).

The following is an example of SRS entries which might be made to specify finishes for housing and rollpin.

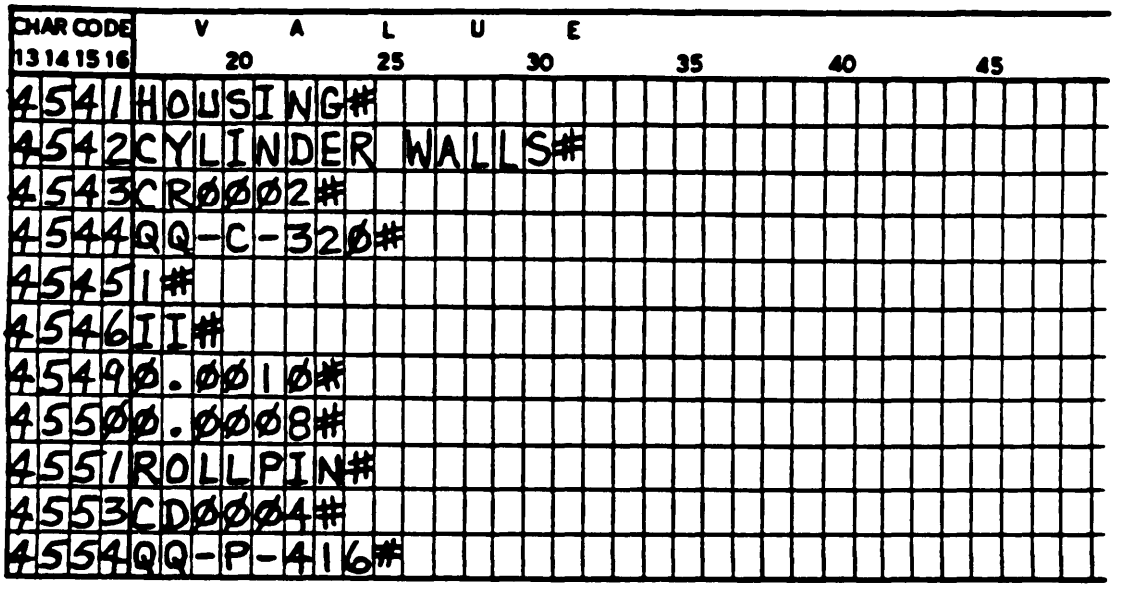

1.2.23 Rated Loads

Rated load or rated load that both aids and opposes the stroke cycle may be specified on the SRS by using one of the following:

a. Rated Load. Write in the load value (pounds) with Code 1562. load current may also be specified, If desired, by writing In the value (amperes) with Code 1564.

b. Rated Load (both aiding and opposing). Write in the load value (pounds) with Code 1566. The load current may also be specified, if desired, by writing in the current value (amperes) with Code 1568.

1.2.24 Maximum Operating Load

Maximum operating load may be specified on the SRS by writing in the maximum load value (pounds) with Code 1570. The load current may also be specified, if desired, by writing in the value (amperes) with Code 1572.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.25 Stall Load

Stall load may be specified on the SRS by writing in the load value (pounds) with Code 1574. The load current may also be specified, if desired, by writing in the value (amperes) with Code 1576.

1.2.26 Static Limit Load

Static limit load may be specified on the SRS either as a multiple of rated load or as a percent of the maximum operating load by using one of the following:

a. Multiple of Rated Load. Write in the multiplier value (number) with Code 1580 to specify that the actuator shall withstand, without any permanent defamation, a static load of (Code 1580) times the rated load.

b. Percent of Operating Load. Write in the value (percent) with Code 1582 to specify that the actuator shall withstand, without any permanent deformations, a static load equivalent to (Code 1582) percent of the maximum operating load.

In addition to a. or b. above, the following may also be used: Enter an "X" with Code 1584 to specify that the actuator is not required to operate under static limit load.

1.2.27 Ultimate Static Load

Ultimate static load may be specified on the SRS either as a percent of static limit load or in pounds by using one of the following:

a. Percent of Static Limit Load. Write in the value (percent) with Code 1590 to specify that the actuator shall withstand, without structural failure, an ultimate static load of (Code 1590) percent of the static limit load.

b. Pounds. Write in the value (pounds) with Code 1592 to specify that the actuator shall withstand, without structural failure, an ultimate static load of (Code 1592) pounds.

In addition to a. or b. above, one or more of the following may also be used:

(1) Write in the value (inches) with Code 1594 to specify that structural failure shall not occur with the actuator extended (Code 1594) inches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

(2) Enter an "X" with Code 1596 to specify that the actuator components may be permanently deformed when subjected to the ultimate static load.

(3) Enter an "X" with Code 1598 to specify that the actuator may become inoperative when subjected to the ultimate static load.

1.2.28 Load Limiting

Load limiting maybe specified on the SRS by using one of the following:

a. Write in the value (pounds) with Code 1600 to specify that the actuator shall be provided with a load limiting device that shall limit the load applied to the actuator to (Code 1600) pounds.

b. Write in the value (percent) with Code 1602 to specify that under maximum voltage conditions the stall torque of the motor for the actuator shall not exceed (Code 1602) percent relative to maximum operating load of the motor.

c. Enter an "X" with Code 1604 to specify that load limiting devices are not applicable.

1.2.29 Antirotational Devices

A requirement that the actuator shall have an antirotation device to provide antirotation to the limit of maximum operating load and maximum dynamic stall torque of the motor may be specified on the SRS by entering an "X" with Code 1610.

1.2.30 Operating Stroke Adjustments

Operating stroke adjustments may be specified on the SRS by using one of the following:

a. Write in the value (inches) with Code 1620 to specify that the operating stroke shall be infinitely adjustable from full stroke down to (Code 1620) inches.

b. Enter an "X" with Code 1622 to specify that the operating stroke shall not be adjustable.

In addition to a. or b. above, the following may also be used: Enter an "X" with Code 1624 to specify that the minimum stroke shall be available anywhere within the full rated stroke.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.31 Nonjamming Mechanical Stops

A requirement that nonjamming mechanical stops shall be provided to limit overtravel at the ends of the operating stroke may be specified on the SRS by entering an "X" with Code 1630.

1.2.32 Reversibility

A requirement that the actuator power screw shall be mechanically irreversible without the aid of a brake for any load up to the static limit load exclusive of vibration and that the actuator shall be electrically reversible and mechanically irreversible under any combinations of operating and environmental conditions specified herein may be specified on the SRS by entering an "X" with Code 1634.

1.2.33 Movable End Fittings

A requirement that the actuator shall be equipped with movable end fittings may be specified on the SRS by entering an "X" with Code 1636.

One or more of the following may also be used:

a. Write in the value (degrees) with Code 1638 to specify that the end fittings shall be capable of (Code 1638) degrees of rotational adjustment.

b. Write in the value (inches) with Code 1640 to specify that the end fittings shall be capable of (Code 1640) inches of linear adjustment.

c. Enter an "X" with Code 1642 to specify that the end fittings shall be equipped with self-aligning bearings.

1.2.34 Operating Temperature

Operating temperature design limits may be specified on the SRS by writing in the minimum value (degrees C) with Code 1660, or by writing in the maximum value (degrees C) with Code 1662, or by writing In both the minimum and the maximum values (degrees C) with Codes 1660 and 1662, respectively.

1.2.35 Storage Temperature

Storage temperature range may be specified on the SRS by writing in both the low temperature value (degrees C) with Code 1661 and the high temperature value (degrees C) with Code 1663.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.36 Weight

Actuator weight may be specified on the SRS either by writing in the value (ounces) with Code 1644 or by writing in the value (pounds) with Code 1646.

1.2.37 Input Power

Input power may be specified on the SRS by using one of the following:

a. Write in the voltage value (volts DC) with Code 1650.

b. Write in the voltage value (volts AC) with Code 1652, the frequency value (hertz) with Code 1654, and the phase value (number) with Code 1656. When Code 1652 is used on the SRS, Codes 1654 and 1656 must also be used.

In addition to a. or b. above, the power source category, as defined in MIL-STD-704, may be specified by writing in the category designation with Code 1658. (See 1.2.9)

1.2.38 Motor

Electric motor requirements may be specified on the SRS by using one of the following:

a. Enter an "X" with Code 1670 to specify that the electric motor incorporated in the actuator shall meet the requirements of Specification MIL-M-8609 for Class A, DC motors. (See 1.2.9)

b. Enter an "X" with Code 1672 to specify that the electric motor incorporated in the actuator shall meet the requirements of Specification MIL-M-8609 for Class B, DC motors. (See 1.2.9)

c. Enter an "X" with Code 1674 to specify that the electric motor incorporated in the actuator shall meet the requirements of Specification MIL-M-7969 for Class A, AC motors. (See 1.2.9)

d. Enter an "X" with Code 1676 to specify that the electric motor incorporated In the actuator shall meet the requirements of Specification MIL-R-7969 for Class B, AC motors. (See 1.2.9)

1.2.39 Electrical Connectors

A requirement that the actuator electrical connectors shall conform to the requirements of a specification may be specified on the SRS by writing in the specification number with Code 1680.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.40 Electrical Wiring

A requirement that the actuator electrical wiring shall conform to the requirements of a specification may be specified on the SRS by writing in the specification number with Code 1682.

One or both of the following may also be used:

a. Enter an "X" with Code 1684 to specify that all leads shall be firmly clamped and potted.

b. Write in the wire size value (AWG) with Code 1686 to specify that wire size less than (Code 1686) AWG shall not be used.

1.2.41 Electrical Connections

A requirement that the actuator electrical connections shall conform to the requirements of a specification may be specified on the SRS by writing in the specification number with Code 1690.

1.2.42 Limit Switches

A requirement that the actuator shall be provided with internal limit switches of the sealed type may be specified on the SRS by entering an "X" with Code 1700.

One or more of the following may also be used:

a. Write in the specification number with Code 1702 to specify that the limit switches shall conform to that specification.

b. Enter an "X" with Code 1704 to specify that the limit switch adjustment shall be accessible, and vibration and tamper proof.

c. Enter an "X" with Code 1706 to specify that neither the adjustment, operation, nor the switches shall be adversely affected by maximum overtravel to the mechanical stops.

d. Enter an "X" with Code 1708 to specify that the limit switches shall not be subjected to side loads.

1.2.43 Thermal Protection

A requirement that integral thermal protection shall be provided to prevent actuator damage due to mechanical and electrical overloads and exceeding the permissible duty cycle may be specified on the SRS by entering an "X" with Code 1710.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.44 Position Transmitters

A requirement that position transmitters shall be integrally installed in the actuator and shall conform to a specification may be specified on the SRS by writing in the specification number with Code 1712.

A further requirement that the position transmitters shall be readily accessible and easily removed for maintenance and replacement may also be specified by entering an "X" with Code 1714.

1.2.45 Locking of Parts

A requirement that all threaded parts shall be locked by safety wiring, self-locking nuts, cotter pins, or other approved methods may be specified on the SRS by entering an "X" with Code 1720.

One or more of the following may also be used:

a. Write in the specification number with Code 1722 to specify that the self-locking nuts shall conform to that specification.

b. Enter an "X" with Code 1724 to specify that mounting screws for motor base and motor shall be drilled for lock wire.

c. Enter an "X" with Code 1726 to specify that lock wire shall be installed in accordance with MS33540 and shall conform to MS20995. (See 1.2.9)

d. Enter an "X" with Code 1728 to specify that use of lockwashers or staking is not permitted.

1.2.46 Housing

A requirement that the actuator shall be adequately protected by a suitable housing and that the housing shall withstand handling and shall be designed for easy access to the actuator internal components may be specified on the SRS by entering an "X" with Code 1730.

1.2.47 Lubrication

Lubrication may be specified on the SRS by using one of the following:

a. Enter an "X" with Code 1732 to specify that lubricants shall be selected and applied to allow the actuator to meet all requirements of this specification affected by lubrication.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

b. Enter an "X" with Code 1734 to specify that the actuator shall not require lubrication during its normal service life.

c. Write in the specification number with Code 1736 to specify that the actuator lubricant shall be in accordance with that specification.

If Code 1732 or 1736 is used, one or both of the following may also be used:

(1) Write in the specification number with Code 1737 to specify that lubrication for gears shall conform to that specification. (See 1.2.9)

(2) Write in the specification number with Code 1738 to specify that lubrication for bearings shall conform to that specification. (See 1.2.9)

1.2.48 Retaining Rings

Retaining rings may be specified on the SRS by entering an "X" with Code 1740 to specify that retaining rings shall be used in accordance with MS16624 and MS16625. (See 1.2.9)

It may also be specified that retaining rings shall not be used where loss of the ring will adversely affect the operation of the actuator by entering an "X" with Code 1742.

1.2.49 Spring Pins

A requirement that spring pins shall conform to NAS561 may be specified on the SRS by entering an "X" with Code 1744.

One or both of the following may also be used:

a. Enter an "X" with Code 1746 to specify that spring pins shall be instilled in a manner which will preclude any possibility of disengagement.

b. Enter an "X" with Code 1748 to specify that spring pin usage shall conform to the limitation specified in MS33547. (See 1.2.9)

1.2.50 Rated Life

Rated life may be specified on the SRS by writing in the number of full stroke cycles the actuator shall be capable of with Code 1750.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.51 Rated Duty Cycle

Rated duty cycle may be specified on the SRS by using one of the following:

a. Enter an "X" with Code 1752 to specify that the actuator shall be capable of continuous duty cycle under any adverse combination of maximum load and electrical and enviromnental parameters specified at standard conditions.

b. Write in the time on value (seconds) with Code 1754 and the time off value (seconds) with Code 1756. When Code 1754 is used on the SRS, Code 1756 must also be used.

1.2.52 Nameplate and Product Marking

If it is desired to specify nameplate and product marking on the SRS, it is mandatory to enter an "X" with Code 1760 to specify that the actuator shall be legibly marked for identification by a firmly attached nameplate in accordance with MIL-STD-130. Code 1760 must be used on the SRS when either Code 1762 or 1764 is used. (See 1.2.9)

One of the following may also be used:

a. Enter an "X" with Code 1762 to specify that the applicable MS drawing numbers and dash numbers be shown on the nameplate.

b. Enter an "X" with Code 1764 to specify that the applicable drawing or manufacturers part number be shown on the nameplate.

1.2.53 Wiring Diagram Nameplate

If it is desired to specify wiring diagram nameplate on the SRS, it is mandatory to enter an "X" with Code 1766 to specify that a plate legibly showing the internal wiring shall be firmly attached to the actuator. Code 1766 must be used on the SRS when Code 1768 is used.

A requirement that data pertaining to the motor which is included on the rotor need not be duplicated on the actuator nameplate may also be specified on the SRS by entering an "X" with Code 1768.

1.2.54 Motor Data Nameplate

A requirement that a plate legibly showing the rotor Internal wiring shall be firmly attached to the actuator motor may be specified on the SRS by entering an "X" with Code 1770.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.55 Lubrication Data Nameplate

A requirement that, if lubrication of the actuator is required during its normal service life, the lubrication requirements shall be included on the nameplate, unless too extensive, and that, in such case, they shall be shown on a separately attached plate, or reference shall be made to the applicable technical order or standard may be specified on the SRS by entering an "X" with Code 1772.

1.2.56 Interference (Conducted)

1.2.56.1 Test Methods

The test method for interference (conducted) may be specified on the SRS by using one of the following:

a. For testing in accordance with the specification referenced with Code 1006, enter an "X" with Code 2500.

b. For exceptions to the test method of the specification referenced with Code 1006, complete the sentence with Code 2502. The exceptions stated must be limited to 189 characters, including punctuation and spaces.

c. For testing in accordance with Method CE04 of MIL-STD-462, enter an "X" with Code 2504. (See 1.2.9)

d. For testing in accordance with Method CE05 of MIL-STD-462, enter an "X" with Code 2506. (See 1.2.9)

If a Test Method Code is used, a Requirement Code must also be used. Do not use a combination of Codes 2500 and 2508 (see 1.2.58).

1.2.56.2 Requirements

Requirements for interference (conducted) maybe specified on the SRS by using one of the following:

a. For requirements in accordance with the requirements of the specification referenced with Code 1006, enter an "X" with Code 2508.

b. For exceptions to the requirements of the specification referenced with Code 1006, complete the sentence with Code 2510. The exceptions stated must be limited to 189 characters, including punctuation and spaces.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

c. For requirements in accordance with the requirements of Method CE04 of MIL-STD-461, enter an "X" with Code 2512. (see 102.9)

d. For requirements in accordance with the requirements of Method CE05 of MIL-STD-461, enter an "X" with Code 2514. (See 1.2.9)

1.2.57 Interference (Radiated)

1.2.57.1 Test Methods

The test method for interference (radiated) may be specified on the SRS by using one of the following:

a. For testing in accordance with the specification referenced with Code 1006, enter an "X" with Code 2520.

b. For exceptions to the test method of the specification referenced with Code 1006, complete the sentence with Code 2522. The exceptions stated must be limited to 189 characters, including punctuation and spaces.

c. For testing in accordance with Method RE02 of MIL-STD-462, enter an "X" with Code 2524. (See 1.2.9)

If a Test Method Code is used, a Requirement Code must also be used. Do not use a combination of Codes 2520 and 2526 (see 1.2.58).

1.2.57.2 Requirements

Requirements for interference (radiated) may be specified on the SRS by using one of the following:

a. For requirements in accordance with the requirements of the specification referenced with Code 1006, enter an "X" with Code 2526.

b. For exceptions to the requirements of the specification referenced with Code 1006, complete the sentence with Code 2528. The exceptions stated must be limited to 189 characters, including punctuation and spaces.

c. For requirements in accordance with Method RE02 of MIL-STD-461, enter an "X" with Code 2530. (See 1.2.9)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.58 Electrical and Environmental Test Methods and Requirements

The instructions contained in this paragraph shall be followed when it is desired to make exceptions to the test methods and requirement of any of the following tests:

Altitude

High Temperature

Low Temperature

Temperature Shock

Rain

Humidity

Fungus Resistance

Salt Fog

Dust

Explosive Atmosphere

Leakage (Immersion)

Acceleration

Vibration

Acoustical Noise

Shock

Combined Temperature-Humidity-Altitude

When a code is shown for any test method, it is mandatory that a requirement code be shown. However, the first test method code and the first requirement code should not be used together, since that combination makes no exception to the specification referenced with Code 1006.

1.2.58.1 Test Methods

The test method may be specified on the SRS by using one of the following codes:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

a. If the first test method is desired, use the first test method code with an "X" to specify testing per the specification referenced with Code 1006.

b. If the second test method is desired, use the second test method code and complete the sentence with the specified exceptions, for testing per the referenced specification with exceptions. The exceptions stated must be limited to 189 characters, including punctuation and spaces.

c. If testing is to be detailed, one or more of the test method codes should be used to specify test conditions. All codes marked with an asterisk "*" must be used when employing this third alternate.

If the specification referenced with Code 1006 specifies a MIL-STD-81O test method and exceptions are to be taken, the second test method code (see b. above) should be used if the exceptions can be stated within the 189 character limitation; the third test method (see above) should be used if the exceptions cannot be stated within the limitation.

1.2.58.2 Requirements

If the requirements specified in the specification shown with Code 1006 are to be used, the first requirements code should be shown, with an "X" on the SRS. If exceptions to the requirements specified in the specification shown with Code 1006 are to be made, the second requirements code should be shown with exceptions written in on the SRS to complete the sentence. If the requirements are to be changes in parameter values as a result of the environmental test, one or more of the remaining requirements codes with the applicable fill-in values must be shown. When the third requirements code is shown, the requirements that there be no evidence of physical damage or degradation of performance will be included automatlcally.

1.2.59 Workmanship

Although MIL-STD-454, Requirements for Equipment, is often used for workmanship requirements for parts, it is too broad and not definitive enough for use in component parts.

If workmanship requirements are different than those defined in the specification shown with Code 1006, complete the sentence, "Workmanship shall be in accordance with __", using Code 6870. Limit the write-in to 189 characters, including spaces and punctuation. If any document is referenced, it must also be entered on the SRS with a code from Appendix B.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.60 Sources

Code 6873, 6874 or Codes 7039 and/or 7040 must be used to specify that the item(s) be procured from one source (source control) or from one or more suggested sources (specification control). When a document is generated for a single item, an "X" is used on the SRS along with Code 6073 or 6874 and at least one line of the Source Table must be used (Codes 5001 and 5002). If the generated document is for multiple "dash-number" items, Characteristic Codes from the Source Tabulation Table along with applicable write-in data must be entered on the SRS, using the rules outlined in 1.2.65. Codes 7039 and/or 7040 may be used to specify source control red/or specification control for single item(s), groups of items, or all items, if the Source Tabulation Table is used. When source control is to be specified, the dash number(s) of the item or group of items to be so controlled are entered on the SRS adjacent to Code 7039. Item(s) to be specification controlled are entered on the SRS adjacent to Code 7040. The Source Tabulation Table provides the capacity for tabulation of 50 items and up to 6 sources and manufacturer's part numbers per item. The Source Tabulation Table may be found in the Appendices, located at the end of Section 1.2. The following description and illustration is intended to show the proper usage of the Source Tabulation Table.

The first Characteristic Code from the Source Tabulation Table, Code 9051, is entered on the SRS along with the first dash-number, designated as "01" or a "block" of dash numbers; for example, "01 thru 04". Block dash numbers may be specified when sources are the same, when no manufacturer's part numbers have been established, or when manufacturer's pert numbers are identical. Dash number "02" or "02 thru 04", as applicable, is entered on the SRS adjacent to Code 9052 and so on, using as many first column Source Tabulation Table Characteristic Codes as necessary to specify the required dash numbers. Codes 9151 through 9156, located in the third column of the table, are used to specify the manufacturer's FSCM number(s) (Cataloging Handbook H4-1) for the first dash-number or "block" of dash-numbered items listed. The manufacturer's name and address may also be added after the FSCM number. If the name and address is inserted, it need only be used with the first entry of the FSCM number. Codes 9451 through 9456 are used to specify the manufacturer's part number for the first dash-number or "block" of dash-numbered items listed. The part number (when known) must be exactly as shown by the manufacturer, including all dashes, punctuation, and spaces. All insertions and write-ins must be limited to 189 characters (including spaces between words, punctuation marks, and "pound-sign") for each Characteristic Code.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

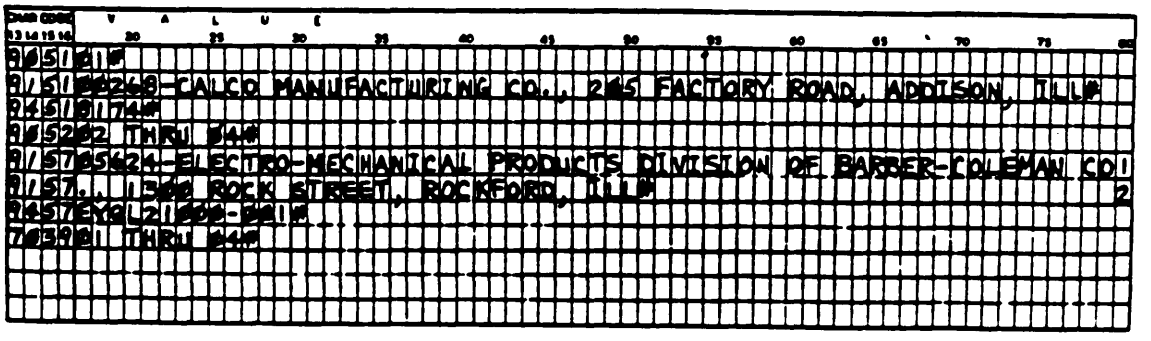

1.2.61 Supersession Data

When a document is being requested to supersede a purchase description or drawing, the superseded number and its date should be entered with Codes 6871 and 6872. The number shall be self-descriptive, such as, "Purchase Description PD-60425" or "Drawing 10059004" and the date should be in military format; i.e., 3 July 1968.

1.2.62 Material and Process Substitution

If it is desired to specify the requirement for material and process substitution shown with Code 6949 in the SRL, enter Code 6949 on the SRS followed by an "X".

1.2.63 Test Data and Test Methods

Recording Group A, B, and C test data is not customary. Most component manufacturers have established "go-no go" test equipment for these inspection tests. Recording of data is usually "Special Handling" and results in increased costs. If it is desired that data be recorded, an "X" shall be entered after the applicable code. The specification till then specify recording the data and require that it be available upon request.

Some manufacturers have developed individual test methods which yield results equivalent to those results obtainable by the customary military test. Should it be desired to permit alternate test methods in lieu of specified methods, place an "X" on the SRS with Code 1561. The supplier must then request approval to use alternate test methods and must demonstrate that the alternate methods do not relax the specified requirements. If strict adherence to the test methods specified is desired, this can be obtained by the use of an "X" with Code 1560. One must be selected.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.64 Specification Requirements, Appendices and SRS

Preparation of an acceptable document by the computer is dependent upon two major factors. These are (1) correct selection of the appropriate Specification Requirements and their applicable codes, and (2) proper application of the requirements and codes onto the SRS form. The above is particularly important in the use of the various appendices.

1.2.65 Specification Requirements Sheet (SRS) Form

A form has been prepared to expedite and ease the preparation and submission of the requirements and parameters necessary for the computer to complete the process of "writing" a procurement document. It is important that the first 12 spaces be completed on each sheet. The next 4 numbered spaces (13, 14, 15, and 16) will contain the required Characteristic Codes; and the following 63 spaces (17 through 79) will be used for Characteristic Values. Each value must be ended by the use of the pound sign (#). The requester's complete name, mailing address, and phone number must be at the top of each SRS submitted. If microfilm query is not completed, a hard copy will be furnished. Revision block is only to be used when a revision to an existing AEDPS is desired, and then only by the original requester or by a bonafide registered user.

Two removable fold-out SRS forms are furnished following the Figures for each Generic Family of items. These forms are to be locally reproduced for use in submitting requests for computer generated Military Specification Exceptions. The first of the forms has the Characteristic Names and Characteristic Codes that are mandatory for each Generic family. Where mandatory requirements are not specified on the fore, any of the other Characteristic Codes in any of the Requirements, Tables, or Appendices can be used. The Characteristic Names are not required, but may be used if desired.

A standard 80 column keypunch form may be used, provided the first 12 spaces on each line contain the specification Title Code and Serial Number.

Caution: Where write-in capability is utilized, the absolute limit is 189 characters for each code, including spaces and punctuation. When the write-in exceeds 63 characters, it should continue into the next line. It is important to continue through space 79 even if it breaks a word, and continue in space 17 on the second line. If more than one line is used, each line must be numbered in space 80; i.e., 1, 2, etc., with the pound sign (#) at the end of the value on the last line. If only one line is used, numbering is not required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.2.66 Searching for Existing Documents

1.2.66.1 General Requirements

Before a request for a document is submitted, it is generally recommended that a search be initiated, to determine if a document already exists in the system that will adequately fulfill the requirement. This is particularly desirable when a document is desired for an item for which a wide range in one of the parameters could be acceptable.

1.2.66.2 Instructions

When a search only is desired, the SRS must be marked in large letters at the top of each sheet with the words "SEARCH ONLY" (see example in MIL-STD-35). The system will then only look for Characteristic Codes furnished and will ignore all others. For example, if Code 1011 specified "1.00", the system will list all documents that specify this minimum dimension, or if Code 1011 specified "1.00^250", the system will list all documents specifying a minimum dimension of 1 inch through 2.5 inches, providing all other characteristic values specified also match.

This same philosophy applies to other characteristics; for example, if a diameter value of "3.50^3.90" is specified and no length is supplied, the system would list all documents having a diameter of 3.50 through 3.90 and could show an unlimited number of actuators, if other dimensions or limits are not specified.

Note: The symbol "^" is used between numeric values whenever a range of values is desired. The asterisk "*" on the basic SRS should be ignored by the requester for "SEARCH ONLY" usage.

Custodians:
Army-MI

Review Activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SL
Army-WC

User Activity:
Army-MU

Preparing Activity:
Army-MI
(Project EDS-0097)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.12	Watt	1003
1.2.13	*FSCM of Requester	1004
1.2.14	*Prime Contract Number	1005
1.2.15	*Applicable General Specification from Specification Title Index	1006
1.2.17	*Item Application	1008
1.2.18	*Drawing Figure Number	1009
1.2.19	*Dimensions (Enter on SRS applicable codes, legends, and values from Appendix A)	
1.2.20	*Design Characteristics (Select one or more and enter value)	
1.2.20.1	Starting current	
	Minimum (amps)	4400
	Maximum (amps)	4402
	or	
	Minimum (milliamps)	4404
	Maximum (milliamps)	4406

* INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.20.2	Operating current	
	Minimum (amps)	4408
	Maximum (amps)	4410
	or	
	Minimum (milliamps)	4412
	Maximum (milliamps)	4414
1.2.20.3	Operating stroke	
	Minimum (inches)	4416
	Maximum (inches)	4418
1.2.20.4	Operating rate	
	Minimum (inches per second)	4420
	Maximum (inches per second)	4422
1.2.20.5	Maximum overtravel (inches)	4424
1.2.20.6	Maximum end play (inches)	4426
1.2.9	*Enter on SRS all referenced document numbers with applicable codes from Appendix B.	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
	Note: If the Requirements and Quality Assurance Provisions in the specification shown with Code 1006 meet the user's requirements, Characteristic Codes without an asterisk "*" in the far left edge should not be used. The generated document will then specify all of the requirements and tests of the referenced specification.	
1.2.1.7	Tabulation (See referenced paragraph for Tabulation Table usage)	
1.2.21	Materials (Enter on SRS applicable codes and values from Table I)	
1.2.22	Finishes (Enter on SRS applicable codes and values from Table II)	
1.2.23	Rated Loads (Select one)	
	Pounds	1562
	Amperes	1564
	or	
	With loads both aiding and opposing	
	Pounds	1566
	Amperes	1568
1.2.24	Maximum Operating Load	
	*Pounds	1570
	Amperes	1572

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.25	Stall Load	
	*Pounds	1574
	Amperes	1576
1.2.26	Static Limit Load (Select one)	
	Static limit load (times the rated load)	1580
	or	
	Static limit load (percent of maximum operating load)	1582
	Operating under static limit load not required	1584
1.2.27	Ultimate Static Load without Structural Failure (Select one)	
	Ultimate static load (percent of static limit load)	1590
	or	
	Ultimate static load (pounds)	1592
	Actuator extension (inches)	1594
	Component deformation permitted	1596
	Inoperative failure permitted	1598

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.28	Load Limiting (Select one)	
	Load limiting device shall be provided to limit load applied to actuator (pounds)	1600
	or	
	Under max voltage, stall torque of motor relative to max operating load of motor shall not exceed (percent)	1602
	or	
	Load limiting devices nonapplicable	1604
1.2.29	Antirotation Devices	
	Provide antirotation device to limit of max operating load and max dynamic stall torque of motor	1610
1.2.30	Operating Stroke Adjustments (Select one)	
	Infinitely adjustable from full stroke down to (inch)	1620
	or	
	Not adjustable	1622
	Minimum stroke shall be available anywhere within full rated stroke	1624

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.31	Nonjamming Mechanical Stops	
	Stops shall be provided to limit overtravel at ends of operating stroke	1630
1.2.32	Reversibility	
	Actuator shall be mechanically irreversible without aid of a brake up to static limit load exclusive of vibration. Actuator shall be electrically reversible and mechanically irreversible under any combination of operating and environmental conditions specified	1634
1.2.33	Movable End Fittings	
	Actuator shall be equipped with movable end fittings	1636
	Rotational adjustment (degrees)	1638
	Linear adjustment (inches)	1640
	Equipped with self-aligning bearings	1642
1.2.34	Operating temperature	
	Minimum (deg C)	1660
	Maximum (deg C)	1662

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.35	Storage Temperature	
	Low temperature (deg C)	1661
	*High temperature (deg C)	1663
1.2.36	Maximum Weight (Select one)	
	Ounces	1644
	or	
	Pounds	1646
1.2.37	Input Power (Select one)	
	Volts DC	1650
	or	
	Volts AC	1652
	*Frequency (hertz)	1654
	*Phase	1656
	Category (per M1L-STD-704)	1658
1.2.38	Motor (Select one)	
	Meets requirements for MIL-M-8609 Class A, DC motor	1670
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.38 Cont.	Meets requirements for MIL-M-8609 Class B, DC motor	1672
	or	
	Meets requirements for MIL-M-7969 Class A, AC motor	1674
	or	
	Meets requirements for MIL-M-7969 Class B, AC motor	1676
1.2.39	Electrical Connectors	
	Conforms to requirements of Specification ____.	1680
1.2.40	Electrical Wiring	
	Conforms to requirements of Specification ____.	1682
	All leads clamped and potted	1684
	Minimum wire size (AWG)	1686
1.2.41	Electrical Connections	
	Conforms to requirements of Specification ____.	1690

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.42	Limit Switches	
	Actuator shall be provided with internal limit switches of sealed type	1700
	Conforms to Specification ____.	1702
	Accessible, and vibration and tamper proof	1704
	Not adversely affected by max overtravel to mechanical stops	1706
	Shall not be subjected to side loads	1700
1.2.43	Thermal Protection	
	Shall prevent actuator damage due to mechanical and electrical overloads and exceeding permissible duty cycle	1710
1.2.44	Position Transmitters	
	Integrally installed in actuator and conforms to Specification ____.	1712
	Readily accessible and easily removed	1714
1.2.45	Locking of Parts	
	Threaded parts locked by safety wiring, cotter pins, self-locking nuts, or other approved method	1720
	Self-locking nuts shall conform to Specification ____.	1722

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.45 Cont.	Mounting screws for motor base and motor shall be drilled for lockwire	1724
	Lockwire shall be installed per 1633540 and conform to MS20995	1726
	Lockwashers or staking is not permitted	1728
1.2.46	Housing	
	Housing adequately protects actuator, withstands handling, and provides easy access to internal components	1730
1.2.47	Lubrication (Select one)	
	Selected and applied to allow actuator to meet all requirements	1732
	or	
	Shall not require lubrication during normal service life	1734
	or	
	Lubrication specification	1736
	Gear lubricant shall conform to Specification ____, (See 1.2.9)	1737
	Bearing lubricant shall conform to Specification ____. (See 1.2.9)	1738

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.48	Retaining Rings (Select one)	
	Shall be used in accordance with Standards MS16624 and MS16625	1740
	or	
	Shall not be used where loss of ring would adversely affect actuator operation	1742
1.2.49	Spring Pins	
	Shall conform to NAS561	1744
	Installed to preclude possibility of disengagement	1746
	Use shall conform to limitations specified in Standard MS33547 (See 1.2.9)	1740
1.2.50	Rated Life	
	Full stroke cycles (specify number)	1750
1.2.51	Rated Duty Cycle (Select one)	
	Continuous operation at rated load	1752
	or	
	On (seconds)	1754
	*Off (seconds)	1756

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.52	Nameplate and Product Marking	
	*Marked with attached nameplate per MIL-STD-130	1760
	MS drawing number and dash number shown on nameplate	1762
	or	
	Drawing number or manufacturer's part number shown on nameplate	1764
1.2.53	Wiring Diagram Nameplate	
	*Shall be attached and show internal wiring	1766
	Shall not duplicate wiring on motor nameplate	1768
1.2.54	Motor Data Nameplate	
	Shall be attached to motor and show motor internal wiring	1770
1.2.55	Lubrication Data Nameplate	
	Lubrication requirements shall be shown on nameplate unless they are too extensive. If too extensive, either provide individual nameplate or reference technical order or standard	1772

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.56	Interference (Conducted)	
1.2.56.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	2500
	or	
	Test per Specification shown with Code 1006 except ____.	2502
	or	
	Test per Method CE04 of MIL-STD-462	2504
	or	
	Test per Method CE05 of MIL-STD-462	2506
1.2.56.2	Requirement (Select one) (Mandatory if either Code 2500, 2502, 2504, or 2506 is selected)	
	Requirements per Specification shown with Code 1006	2508
	or	
	Requirements per Specification shown with Code 1006 except ____.	2510
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.56.2 Cont.	Requirements as follows:	
	Requirements per Method CE04 of MIL-STD-461	2512
	or	
	Requirements per Method CE05 of MIL-STD-461	2514
1.2.57	Interference (Radiated)	
1.2.57.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	2520
	or	
	Test r Specification shown with Code 1006 except ____.	2522
	or	
	Test per Method RE02 of MIL-STD-462	2524
1.2.57.2	Requirement (Select one) (Mandatory if either Code 2520, 2522, or 2524 is selected)	
	Requirements per Specification shown with Code 1006	2526
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.57.2 Cont.	Requirements per Specification shown with Code 1006 except ____.	2528
	or	
	Requirements as follows:	
	Requirements per Method RE02 of MIL-STD-461	2530
1.2.58	Altitude	
1.2.58.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	1780
	or	
	Test per Specification shown with Code 1006 except ____.	1782
	or	
	Test per Method 500 of MIL-STD-810	
	*Test procedure number (Select one)	
	I	1784
	or	
	II	1786

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.58.1 Cont.	Measurements prior to test (Select one or more)	
	Starting current	1708
	Operating current	1790
	Operating stroke	1792
	Operating rate	1794
	Overtravel	1796
	End play	1798
	*Actuator operating time with chamber at reduced pressure (minutes)	1800
	*Actuator operating time with chamber at standard ambient conditions (minutes)	1802
	Measurements during test (Select one or more)	
	Starting current	1804
	Operating current	1806
	Operating stroke	1808
	Operating rate	1810
	Overtravel	1812
	End play	1814

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.58.1 Cont.	Measurements after test (Select one or more)	
	Starting current	1816
	Operating current	1818
	Operating stroke	1820
	Operating rate	1822
	Overtravel	1824
	End play	1826
	Rate of pressure change (Torr per second)	1828
	For test procedure II only	
	*Chamber internal pressure reduced to (Torr)	1830
	Chamber internal temperature reduced to (deg C) (if other than -54 deg C)	1832
1.2.58.2	Requirement (Select one) (Mandatory if either Code 1780, 1782, 1784, or 1786 is selected)	
	Requirements per Specification shown with Code 1006	1834
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.58.2 Cont.	Requirements per Specification shown with Code 1006 except ____.	1036
	or	
	Requirements as follows:	
	*No evidence of physical damage or degradation of performance	1837
	Pretest requirements per Design Characteristics	1838
	Requirements during test per Design Characteristics	1840
	Requirements after test per Design Characteristics	1842
1.2.58	High Temperature	
1.2.58.1	Test Procedure (select one if required)	
	Test per Specification shown with Code 1006	1850
	or	
	Test per Specification shown with Code 1006 except____.	1852
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.58.1 Cont.	Test per Method 501 of MIL-STD-810	
	*Test procedure number (Select one)	
	I	1855
	or	
	II	1856
	Measurements prior to test (Select one or more)	
	Starting current	1858
	Operating current	1860
	Operating stroke	1862
	Operating rate	1864
	Overtravel	1866
	End play	1868
	Measurements during test (Select one or more)	
	Starting current	1872
	Operating current	1874
	Operating stroke	1876
	Operating rate	1878
	Overtravel	1880
	End play	1882

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.58.1 Cont.	Operating time at elevated temperature (minutes)	1884
	Operating time at standard ambient conditions (minutes)	1886
	Measurements after test (Select one or more)	
	Starting current	1888
	Operating current	1890
	Operating stroke	1892
	Operating rate	1894
	Overtravel	1896
	End play	1898
	For test procedure I only	
	Internal chamber temperature (deg C) (if other than 71 deg C)	1900
1.2.58.2	Requirement (Select one) (Mandatory if either Code 1850, 1852, 1855, or 1856 is selected)	
	Requirements per Specification shown with Code 1006	1902
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.58.2 Cont.	Requirements per Specification shown with Code 1006 except ____.	1904
	or	
	Requirements as follows:	
	*No evidence of physical damage or degradation of performance	1905
	Pretest requirements per Design Characteristics	1906
	Requirements during test per Design Characteristics	1908
	Requirements after test per Design Characteristics	1910
1.2.58	Low Temperature	
1.2.58.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	1920
	or	
	Test per Specification shown with Code 1006 except ____.	1922
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.58.1 Cont.	Test per Method 502 of MIL-STD-810	1923
	Internal chamber storage temperature (deg C)	1924
	Neasurements prior to test (Select one or more)	
	Starting current	1926
	Operating current	1928
	Operating stroke	1930
	Operating rate	1932
	Overtravel	1934
	End play	1936
	Internal chamber storage time (hours)	1938
	Measurements during test (Select one or more)	
	Starting current	1942
	Operating current	1944
	Operating stroke	1946
	Operating rate	1948
	Overtravel	1950
	End play	1952

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.58.1 Cont.	Actuator operating time at lowest operating temperature (minutes)	1954
	Actuator operating time at standard ambient conditions (minutes)	1956
	Measurements after test (Select one or more)	
	Starting current	1958
	Operating current	1960
	Operating stroke	1962
	Operating rate	1964
	Overtravel	1966
	End play	1%8
	Chamber air velocity (feet per minute)	1970
1.2.58.2	Requirement (Select one) (Mandatory if either Code 1920, 1922, or 1923 is selected)	
	Requirements per Specification shown with Code 1006	1972
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.58.2 Cont.	Requirements per Specification shown with Code 1006 except ____.	1974
	or	
	Requirements as follows:	
	*No evidence of physical damage or degradation of performance	1975
	Pretest requirements per Design Characteristics	1976
	Requirements during test per Design Characteristics	1978
	Requirements after test per Design Characteristics	1980
1.2.58	Temperature Shock	
1.2.58.1	Test Procedure (Select one if required)	
	Test per Specification shown with code 1006	2000
	or	
	Test per Specification shown with Code 1006 except ____.	2002
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.58.1 Cont.	Test per Method 503 of MIL-STD-810	2004
	Measurements prior to test (Select one or more)	
	Starting current	2006
	Operating current	2008
	Operating stroke	2010
	Operating rate	2012
	Overtravel	2014
	End play	2016
	Measurements after test (Select one or more)	
	Starting current	2018
	Operating current	2020
	Operating stroke	2022
	Operating rate	2024
	Overtravel	2026
	End play	2028

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.58.2	Requirement (Select one) (Mandatory if either Code 2000, 2002, or 2004 is selected)	
	Requirements per Specification shown with Code 1006	2030
	or	
	Requirements per Specification shown with Code 1006 except ____.	2032
	or	
	Requirements as follows:	
	*No evidence of physical damage or degradation of performance	2033
	Pretest requirements per Design characteristics	2034
	Requirements after test per Design Characteristics	2036
1.2.58	Rain	
1.2.58.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	2040
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.58.1 Cont.	Test per Specification shown with code 1006 except ____.	2042
	or	
	Test per Method 506 of MIL-STD-810	2043
	Measurements prior to test (Select one or more)	
	Starting current	2046
	Operating current	2048
	Operating stroke	2050
	Operating rate	2052
	Overtravel	2054
	End play	2056
	Measurements during test (Select one or more)	
	Starting current	2070
	Operating current	2072
	Operating stroke	2074
	Operating rate	2076
	Overtravel	2078
	End play	2080

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.58.1 Cont.	Actuator operating time during test (minutes)	2082
	Measurements after test (Select one or more)	
	Starting current	2058
	Operating current	2060
	Operating stroke	2062
	Operating rate	2064
	Overtravel	2066
	End play	2068
1.2.58.2	Requirement (Select one) (Mandatory if either Code 2040, 2042, or 2043 is selected)	
	Requirements per Specification shown with Code 1006	2084
	or	
	Requirements per Specification shown with Code 1006 except ____.	2086
	or	
	Requirements as follows:	
	*No evidence of physical damage or degradation of performance	2087

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.68.2 Cont.	Pretest requirements per Design characteristics	2088
	Post test requirements per Design Characteristics	2090
	Requirements during test per Design Characteristics	2092
1.2.58	Humidity	
1.2.58.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	2600
	or	
	Test per Specification shown with code 1006 except ____.	2602
	or	
	Test per Method 507 of MIL-STD-810	
	*Test procedure number (Select one)	
	I	2604
	or	
	II	2606
	or	
	III	2608
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.58.1 Cont.	IV	2610
	or	
	V	2612
	Measurements prior to test (Select one or more)	
	Starting current	2614
	Running current	2616
	Operating stroke	2618
	Operating rate	2620
	Overtravel	2622
	End play	2624
	Measurements during test (Select one or more)	
	Starting current	2626
	Running current	2628
	Operating stroke	2630
	Operating rate	2632
	Overtravel	2634
	End play	2636

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.58.1 Cont.	Measurements after test (Select one or more)	
	Starting current	2638
	Operating current	2640
	Operating stroke	2642
	Operating rate	2644
	Overtravel	2646
	End play	2648
	For test procedure I only	
	Prior to test actuator exposed to	
	*Temperature (deg C)	2650
	*Period (hours)	2652
	For test procedures II and III only	
	Measurements during five 48-hour cycles (Select one)	
	At midpoint of each cycle	2654
	or	
	At end of each cycle	2656

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.58.1 Cont.	For test procedure III only	
	Measurements shall be made at end of each 24-hour period during 480-hour exposure period	2658
	For test procedure V only	
	Measurements (Select one)	
	After each cycle	2660
	or	
	After completion of all cycles	2662
	Number of cycles shall be ____. (If other than 20 cycles)	2664
	Method for determining purity of water shall be ____. (If other than specified)	2666
1.2.58.2	Requirement (Select one) (Mandatory if either Code 2600, 2602, 2604, 2606, 2608, 2610, or 2612 is selected)	
	Requirements per Specification shown with Code 1006	2668
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.58.2 Cont.	Requirements per specification shown with Code 1006 except ___.	2670
	or	
	Requirements as follows:	
	*No evidence of physical damage or degradation of performance	2672
	Pretest requirements per Design Characteristics	2674
	Requirements during test per Design Characteristics	2676
	Requirements after test per Design Characteristics	2678
1.2.58	Fungus Resistance	
1.2.58.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	2700
	or	
	Test per specification shown with Code 1006 except ___.	2702
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.58.1 Cont.	Test per Method 508 of MIL-STD-810	2703
	Measurements prior to test (Select one or more)	
	Starting current	2704
	Running current	2706
	Operating stroke	2708
	Operating rate	2710
	Overtravel	2712
	End play	2714
	Test period (days) (if other than 28 days)	2716
	Measurements after test (Select one or more)	
	Starting current	2718
	Running current	2720
	Operating stroke	2722
	Operating rate	2724
	Overtravel	2726
	End play	2728

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.58.2	Requirement (Select one) (Mandatory if either Code 2700, 2702, or 2703 is selected)	
	Requirements per Specification shown with Code 1006	2730
	or	
	Requirements per Specification shown with Code 1006 except ____.	2732
	or	
	Requirements as follows:	
	*No fungus on electrical wiring or parts made of inorganic material where damage or degradation of performance might result	2734
	Pretest requirements per Design Characteristics	2736
	Post test requirements per Design Characteristics	2738
1.2.58	Salt Fog	
1.2.58.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	2750
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF, PARA,	CHARACTERISTIC NAME	CODE
1.2.58.1 Cont.	Test per Specification shown with Code 1006 except ____	2752
	or	
	Test per Method 509 of MIL-STD-810	2754
	Measurements prior to test (Select one or more)	
	Starting current	2756
	Running current	2758
	Operating stroke	2760
	Operating rate	2762
	Overtravel	2763
	End play	2764
	Measurements after 24 hours of salt fog exposure (Select one or more)	
	Starting current	2766
	Running current	2768
	Operating stroke	2770
	Operating rate	2772
	Overtravel	2774
	End play	2776

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.58.1 Cont.	Measurements after test (Select one or more)	
	Starting current	2778
	Operating current	2780
	Operating stroke	2782
	Operating rate	2704
	Overtravel	2786
	End play	2788
	Salt solution (percent) (if other than 5 percent)	2790
	Special mounting shall be __. (If other than normal means)	2792
	Exposure time (hours) (if other than 48 hours)	2794
	Drying period (hours) (if other than 48 hours)	2796
1.2.58.2	Requirement (Select one) (Mandatory if either Code 2750, 2752, or 2754 is selected)	
	Requirements per Specification shown with Code 1006	2798
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.58.2 Cont.	Requirements per Specification shown with Code 1006 except ____.	2800
	or	
	Requirements as follows:	
	*No evidence of physical damage or degradation of performance	2802
	Pretest requirements per Design Characteristics	2804
	Requirements after 24 hours salt fog exposure per Design Characteristics	2806
	Requirements after test per Design Characteristics	2808
1.2.58	Dust	
1.2.58.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	2820
	or	
	Test per Specification shown with Code 1006 except ____.	2822
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.58.1 Cont.	Test per Method 510 of MIL-STD-810	2824
	Measurements prior to test (Select one or more)	
	Starting current	2826
	Operating current	2828
	Operating stroke	2830
	Operating rate	2832
	Overtravel	2834
	End play	2836
	Measurement during test (Select one or more)	
	Starting current	2838
	Operating current	2840
	Operating stroke	2842
	Operating rate	2844
	Overtravel	2846
	End play	2848

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.58.1 Cont.	Measurements after test (Select one or more)	
	Starting current	2050
	Operating current	2852
	Operating stroke	2854
	Operating rate	2856
	Overtravel	2858
	End play	2859
	Change actuator orientation to expose all critical or vulnerable parts to dust stream	2860
	Actuator operation during test (minutes)	2861
	A second 6-hour test at 63 deg C shall be performed immediately after reaching stabilization in step 2	2862
1.2.58.2	Requirement (Select one) (Mandatory If either Code 2820, 2822, or 2824 is selected)	
	Requirements per Specification shown with Code 1006	2864
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.58.2 cont.	Requirements per Specification shown with Code 1006 except ____.	2866
	or	
	Requirements as follows:	
	*No evidence of physical damage or degradation of performance	2868
	Pretest requirements per Design Characteristics	2870
	Requirements during test per Design Characteristics	2872
	Requirements after test per Design Characteristics	2874
1.2.58	Explosive Atmosphere	
1.2.58.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	2240
	or	
	Test per Specification shown with Code 1006 except ____.	2242
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.58.1 Cont.	Test per Method 511 of MIL-STD-810	
	*Test procedure (select one)	
	I	2246
	or	
	II	2248
	or	
	III	2250
	Measurements prior to test (Select one or more)	
	Starting current	2252
	Operating current	2254
	Operating stroke	2256
	Operating rate	2258
	Overtravel	2260
	End play	2262
	For test procedure I only	
	Actuator load during test (Select one)	
	*Pounds	2264
	Amperes	2266
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.58.1 Cont.	Rated load	2268
	Test chamber ambient temperature (deg C) (if lower then 71 deg C)	2270
1.2.58.2	Requirement (Select one) (Mandatory if either Code 2240, 2242, 2246, 2248, or 2250 is selected)	
	Requirements per Specification shown with Code 1006	2272
	or	
	Requirements per Specification shown with Code 1006 except ____,	2274
	or	
	Requirements as follows:	
	*No explosion in test chamber	2276
	Pretest requirements per Design Characteristics	2278
1.2.58	Leakage (Immersion)	
1.2.58.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	2880
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.58.1 Cont.	Test per Specification shown with Code 1006 except ____.	2882
	or	
	Test per Method 512 of MIL-STD-810	
	*Test procedure number (Select one)	
	I	2884
	or	
	II	2886
	Measurements prior to test (Select one or more)	
	Starting current	2888
	Operating current	2890
	Operating stroke	2892
	Operating rate	2894
	Overtravel	2896
	End play	2898
	Actuator operation during test (minutes)	2900

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.58.1 Cont.	Actuator condition (Select one)	
	Transit	2902
	or	
	Operational	2904
	Measurements during test (Select one or more)	
	Starting current	2906
	Operating current	2908
	Operating stroke	2910
	Operating rate	2912
	Overtravel	2914
	End play	2916
	Measurements after test (Select one or more)	
	Starting current	2918
	Operating current	2920
	Operating stroke	2922
	Operating rate	2924
	Overtravel	2926
	End play	2928

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.58.2	Requirement (Select one) (Mandatory if either Code 2880, 2882, 2884, or 2886 is selected)	
	Requirements per Specification shown with Code 1006	2930
	or	
	Requirements per Specification shown with Code 1006 except ____.	2932
	or	
	Requirements as follows:	
	*Failure criteria	
	No evidence of water leakage	2934
	or	
	No leakage as evidenced by bubbles	2936
	Pretest requirements per Design Characteristics	2938
	Requirements' during test per Design Characteristics	2940
	Requirements after test per Design Characteristics	2942

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.58	Acceleration	
1.2.58.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	2330
	or	
	Test per Specification shown with Code 1006 except ____.	2332
	or	
	Test per Method 513 of MIL-STD-810	2334
	Measurements prior to test (Select one or more)	
	Starting current	2336
	Operating current	2338
	Operating stroke	2340
	Operating rate	2342
	Overtravel	2344
	End play	2346
	*Test level (g's)	2348
	Test time each direction (minutes)	2350

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.58.1 Cont.	Test procedure number (Select one, if both procedures not required)	
	I	2378
	or	
	II	2380
	Measurements during test (Select one or more)	
	Starting current	2352
	Operating current	2354
	Operating stroke	2356
	Operating rate	2358
	Overtravel	2360
	End play	2362
	Actuator operation time each direction (minutes)	2364
	Measurements after test (Select one or more)	
	Starting current	2366
	Operating current	2368
	Operating stroke	2370
	Operating rate	2372

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.58.1 Cont.	Overtravel	2374
	End play	2376
1.2.58.2	Requirement (Select one) (Mandatory if either Code 2330, 2332, or 2334 is selected)	
	Requirements per Specification shown with Code 1006	2382
	or	
	Requirements per Specification shown with Code 1006 except ____.	2384
	or	
	Requirements as follows:	
	*No evidence of physical damage or degradation of performance	2385
	Pretest requirements per Design Characteristics	2386
	Requirements during test per Design Characteristics	2388
	Requirements after test per Design Characteristics	2390

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.58	Vibration	
1.2.58.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	2950
	or	
	Test per Specification shown with Code 1006 except ____.	2952
	or	
	Test per Method 514 of MIL-STD-810	
	*Test procedure number (Roman numeral)	2953
	*Test curve selection	
	*Curve Identification letter	2954
	*Curve figure number	2956
	Measurements prior to test (Select one or more)	
	Starting current	2970
	Operating current	2972
	Operating stroke	2974
	Operating rate	2976
	Overtravel	2978
	End play	2980

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.58.1 Cont.	Measurements during test (Select one or more if Code 2998 not used)	
	Starting current	2958
	Operating current	2960
	Operating stroke	2962
	Operating rate	2964
	Overtravel	2966
	End play	2968
	Measurements after test (Select one or more)	
	Starting current	2982
	Operating current	2984
	Operating stroke	2986
	Operating rate	2988
	Overtravel	2990
	End play	2992
	Acceleration nominal derating of selected test curve (g's)	2994
	Frequency nominal derating of selected test curve (hertz)	2996

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.58.1 Cont.	Test specimen shall not be operated	2998
	Limitation of nominal transverse motion in respect to input motion (percent)	3000
	Test temperature (deg C)	
	Low	3002
	High	3004
	Vibration time at temperature extremes	
	At low temperature (minutes)	3006
	At high temperature (minutes)	3000
	Procedure for combining sinusoidal and random vibration shall be _____ (If not performed separately)	3010
	For test procedures VIII and IX only	
	Total vehicle mileage (miles)	3012
	For test procedures X and XI only	
	Total land transportation mileage (miles)	3014

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.58.2	Requirement (Select one) (Mandatory if either Code 2950, 2952, or 2953 is selected)	
	Requirements per Specification shown with Code 1006	3016
	or	
	Requirements per Specification shown with Code 1006 except ___.	3018
	or	
	Requirements as follows:	
	*No evidence of physical damage or degradation of performance	3020
	Pretest requirements per Design Characteristics	3022
	Requirements during test per Design Characteristics	3024
	Requirements after test per Design Characteristics	3026
1.2.58	Acoustical Noise	
1.2.58.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	3030
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.58.1 Cont.	Test per Specification shown with Code 1006 except ___.	3032
	or	
	Test per Method 515 of MIL-STD-810	
	*Test category (Select one)	
	A	3036
	or	
	B	3038
	or	
	C	3040
	or	
	D	3042
	Measurements prior to test (Select one or more)	
	Starting current	3044
	Operating current	3046
	Operating stroke	3048
	Operating rate	3050
	Overtravel	3052
	End play	3054

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.58.1 Cont.	Measurements during test (Select one or more)	
	Starting current	3056
	Operating current	3058
	Operating stroke	3060
	Operating rate	3062
	Overtravel	3064
	End play	3066
	Measurements after test (Select one or more)	
	Starting current	3068
	Operating current	3070
	Operating stroke	3072
	Operating rate	3074
	Overtravel	3076
	End play	3078
	Actuator operating time during test (minutes)	3080

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.58.2	Requirement (Select one) (Mandatory if either Code 3030, 3032, 3036, 3038, 3040, or 3042 is selected)	
	Requirements per Specification shown with Code 1006	3082
	or	
	Requirements per Specification shown with Code 1006 except ____.	3084
	or	
	Requirements as follows:	
	*No physical damage or degradation	3086
	Pretest requirements per Design Characteristics	3088
	Requirements during test per Design Characteristics	3090
	Requirements after test per Design Characteristics	3092
1.2.58	Shock	
1.2.58.1	Test Procedure (Select one if required)	
	Test per Specification shown with code 1006	3100
	or	

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA,	CHARACTERISTIC	
	NAME	CODE
1.2.58.1 Cont.	Test per Specification shown with Code 1006 except ____.	3102
	or	
	Test per Method 516 of MIL-STD-810	
	*Test procedure number (Roman numeral)	3104
	Measurements prior to test (Select one or more)	
	Starting current	3106
	Operating current	3108
	Operating stroke	3110
	Operating rate	3112
	Overtravel	3114
	End play	3116
	Shock pulse selection (for test procedures I, III, and IV only)	
	Shock pulse configuration figure (Select one)	
	Figure 516.1-1	3118
	or	
	Figure 516.1-2	3120

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.58.1 Cont.	Shock pulse peak letter (Select one)	
	A	3122
	or	
	B	3124
	Shock pulse duration letter (Select one)	
	C	3126
	or	
	D	3128
	Test temperature (deg C)	
	Low	3130
	High	3132
	Measurements during test (for test procedures I and IV only) (Select one or more)	
	Starting current	3134
	Operating current	3136
	Operating stroke	3138
	Operating rate	3140
	Overtravel	3142
	End play	3144

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.58.1 Cont.	Measurements after test (Select one or more)	
	Starting current	3146
	Operating current	3148
	Operating stroke	3150
	Operating rate	3152
	Overtravel	3154
	End play	3156
1.2.58.2	Requirement (Select one) (Mandatory if either Code 3100, 3102, or 3104 is selected)	
	Requirements per Specification shown with Code 1006	3158
	or	
	Requirements per Specification shown with Code 1006 except ____,	3160
	or	
	Requirements as follows:	
	*No evidence of physical damage or degradation of performance	3162
	Pretest requirements for Design Characteristics	3164

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.58.2 Cont.	Requirements during test per Design Characteristics	3166
	Requirements after test per Design Characteristics	3168
1.2.58	Combined Temperature-Humidity-Altitude	
1.2.58.1	Test Procedure (Select one if required)	
	Test per Specification shown with Code 1006	2450
	or	
	Test per Specification shown with Code 1006 except ____.	2452
	or	
	Test per Method 518 of MIL-STD-810	2454
	Measurements prior to test (Select one or more)	
	Starting current	2456
	Operating current	2458
	Operating stroke	2460
	Operating rate	2462
	Overtravel	2466
	End play	2468

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.58.1 Cont.	Measurements after test (Select one or more)	
	Starting current	2470
	Operating current	2472
	Operating stroke	2474
	Operating rate	2476
	Overtravel	2478
	End play	2480
1.2.58.2	Requirement (Select one) (Mandatory if either Code 2450, 2452, or 2454 is selected)	
	Requirements per Specification shown with Code 1006	2482
	or	
	Requirements per Specification shown with Code TD06 except ____.	2484
	or	
	Requirements as follows:	
	*No evidence of physical damage or degradation of performance	2485
	Pretest requirements per Design Characteristics	2486
	Requirements after test per Design Characteristics	2488

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.59	Workmanship	
	Shall be in accordance with ____.	6870
1.2.60	*Source (Select one of the following. Complete at least one line of the Source Table except when source tabulation is used)	
	Source Control	6873
	or	
	Specification Control	6874
	or	
	Source Tabulation Table (Enter on SRS applicable codes from Appendix S)	
	Source Control Items ____.	7039
	Specification Control Items ____.	7040
1.2.61	Superseded Document	6871
	*Date	6872
1.2.62	Material and Process Substitution	
	Items furnished to this document shall be representative of a product which has been accepted by the procuring activity. No substitution of materials and processes or change in design shall be made without prior approval of the procuring activity when such change affects interchangeability with respect to installation. performance, or design within the requirements of this document.	6949

*INDICATES MANDATORY REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.10	*First Article Inspection - Select One	
	First Article Inspection on this item in accordance with the testing in the applicable general specification and in the order specified herein. (Enter all required tests in desired order of testing on the SRS, using applicable codes from Appendix C.)	1540
	First Article Inspection on this item in accordance with the testing in the applicable general specification.	1541
	First Article Inspection not required.	1542
	First Article Inspection on this item in accordance with the testing in the applicable general specification except as shown on Appendix J. (Enter all tests to be deleted on the SRS, using applicable codes from Appendix J.)	7021
	First Article Inspection on this item in accordance with Appendix C. (Enter all required tests in desired order of testing on the SRS, using applicable codes from Appendix C.)	7022

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.10 Cont.	First Article Inspection on this item in accordance with the testing in the applicable general specification except___.	7023
1.2.63	First Article Test Data (Select one if required)	
	First Article Test Data	7024
	First Article Test Data on a similar item.	1543
1.2.10	*Group A Inspection - Select One	
	Group A inspection on this item in accordance with the applicable general military specification and in the order specified herein. (Enter all required tests in desired order of testing on the SRS, using applicable codes from Appendix D.)	1545
	Group A inspection on this item in accordance with the applicable general military specification with additional tests required. (Enter the added tests only on the SRS, using applicable codes from Appendix D. Enter the sequence on the SRS, using applicable codes from Appendix G.)	1546

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

QUALIIY ASSURANCE REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.10 Cont.	Group A inspection on this item in accordance with the applicable general military specification with certain tests deleted.(Enter deleted tests on the SRS, using applicable codes from Appendix H.)	1547
	Group A inspection on this item in accordance with the applicable general military specification.	1548
	Group A inspection on this item in accordance with Appendix D. (Enter all required tests in the desired order of testing on the SRS, using applicable codes from Appendix D.) (If this code is used, Code 7033 or 7034 is mandatory.)	7031
	*Group A sampling plan is specified in MIL-STD-105. (Enter inspection level and AQL on the SRS, using applicable codes from Appendix D.) (If subgroups are used, use Code 7036.)	7033
	Tests in each Group A inspection sub group shall be combined for inspection. (Use this code if Appendix D shows sub groups.)	7036
	or	

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA,	CHARACTERISTIC NAME	CODE
1.2.10 Cont.	*Group A sampling plan shall be 100 percent with defective units removed. (Enter 100 percent on the SRS, using applicable codes from Appendix D.)	7034
	Lot shall be rejected if defectives exceed ____ percent.	7035
	Group A inspection on this item in accordance with applicable general military specification except ____.	7032
1.2.63	Group A Test Data to be Recorded	1549
1.2.10	*Group B Inspection - Select One	
	Group B Inspection on this item in accordance with the applicable general specification and in the order specified herein. (Enter all required tests in desired order of testing on the SRS, using applicable codes from Appendix E-1 or E-2.)	1550

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.10 Cont.	Group B inspection on this item in accordance with the applicable general milltary specification with additional tests required. (Enter the added tests only on the SRS, using applicable codes from Appendix E-1 or E-2. Enter the sequence on the SRS, using applicable codes from Appendix 6.)	1551
	Group B inspection on this item in accordance with the applicable general military specification with certain tests deleted. (Enter deleted tests on the SRS, using applicable codes from Appendix H.)	1552
	Group B inspection on this item in accordance with the applicable general military specification.	1553
	Group B inspection on similar items in accordance with the applicable general military specification.	1554
	Group B inspection not required.	7045

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.10 Cont.	Group B inspection on this item in accordance with Appendix E-1 for sample as specified in the table. (Enter all required tests in the desired order of testing on the SRS, using applicable codes from Appendix E-1.)	7041
	Group B inspection on this Item in accordance with Appendix E-2 for statistical Sampling in accordance with MIL-STD-105. (Enter all required tests in desired order of testing on the SRS, using applicable codes from Appendix E-2.)	7044
	Group B inspection on this item in accordance with applicable general military specification except ____.	7042
1.2.63	Group B Test Data to be Recorded.	7043
1.2.10	Group C Inspection - Select One (if required)	
	Group C inspection on this item in accordance with the applicable general military specification and in the order specified herein. (Enter all required tests in desired order of test on the SRS, using applicable codes from Appendix F.)	1555

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.10 Cont.	Group C inspection on this item in accordance with the applicable general military specification with additional tests required. (Enter the added tests only on the SRS, using applicable codes from Appendix F. Enter the sequence on the SRS, using applicable codes from Appendix G.)	1556
	Group C inspection on this item in accordance with the applicable general military specification with certain tests deleted. (Enter deleted tests on the SRS, using applicable codes from Appendix H.)	1557
	Group C inspection on this item in accordance with the applicable general military specification.	1558
	Group C inspection on similar items in accordance with the applicable general military specification.	1559
	Group C inspection on this item in accordance with Appendix F. (Enter all required tests in desired order of testing on the SRS, using applicable codes from Appendix F.)	7053

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.10 Cont.	Group C inspection on this item in accordance with applicable general military specification except ____.	7054
	Group C inspection not required.	7050
1.2.63	Group C Test Data to be Recorded.	7055
1.2.63	*Test Methods - Select One	
	As stated herein.	1560
	Alternate methods permitted.	1561
1.2.10	Inspection of Preparation for Delivery	
	As specified in Specification shown with Code 1006	1526
	or	
	As required to determine compliance with Section 5	1527
	Sampling plan shall be ____.	1528

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIAL REQUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC	
	NAME	CODE
1.2.8	Additional Requirement(s) (List each requirement separately starting with Code 7001, 7002, etc. and limiting each to 189 characters including punctuation, and spaces).	7001 7002 7003 7004 7005
1.2.8	Marking requirements (List each requirement separately starting with Code 6991, 6992, etc. and limiting each to 189 characters including punctuation and spaces).	6991 6992 6993 6994 6995
1.2.8	Additional Quality Assurance Provisions (List each item separately starting with Code 7011, 7012, etc. and limiting each to 189 characters including punctuation and spaces).	7011

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIAL REOUIREMENTS

SEE MIL-STD-35 FOR EXAMPLE OF VALUE FILL-IN.

REF. PARA.	CHARACTERISTIC NAME	CODE
1.2.8 Cont.		7012
		7013
		7014
		7015
1.2.8	Packaging Requirement(s) for Section 5 (List each requirement separately starting with Code 7006, 7007, etc. and limiting each to 189 characters including punctuation, and spaces).	7006
		7007
		7008
		7009
		7010
1.2.8	Additional Note(s) for Section 6 (List each requirement separately starting with Code 7016, 7017, etc. and limiting each to 189 characters including punctuation, and spaces).	7016
		7017
		7018
		7019
		7020

*INDICATES MANDATORY REQUIREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. ACTUATOR MATERIALS TABLE

(See 1.2.21)

COMPONENT		MATERIAL		SPECIFICATION		NUMBER OR ALLOY NUMBER		CONDITION OR TEMPER		FORM		CLASS		GRADE		TYPE		COMPOSITION	
CODE	NAME	CODE	NUMBER FROM MIL-STD-35-1	CODE	NUMBER	CODE	NUMBER	CODE	NUMBER	CODE	NAME	CODE	NUMBER	CODE	NUMBER	CODE	NUMBER	CODE	NUMBER OR LETTER
5080		5081		5082		5083		5084		5085		5086		5087		5088		5089	
5090		5091		5092		5093		5094		5095		5096		5097		5098		5099	
5100		5101		5102		5103		5104		5105		5106		5107		5108		5109	
5110		5111		5112		5113		5114		5115		5116		5117		5118		5119	
5120		5121		5122		5123		5124		5125		5126		5127		5128		5129	
5130		5131		5132		5133		5134		5135		5136		5137		5138		5139	
5140		5141		5142		5143		5144		5145		5146		5147		5148		5149	
5150		5151		5152		5153		5154		5155		5156		5157		5158		5159	
5160		5161		5162		5163		5164		5165		5166		5167		5168		5169	
5170		5171		5172		5173		3174		5175		5176		5177		5178		5179	
5180		5181		5182		5183		5184		5185		5186		5187		5188		5189	
5190		5191		5192		5193		5194		5195		5196		5197		5198		5199	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE II. ACTUATOR FINISHES TABLE

(See 1.2.2.2)

COMPONENT		COMPONENT SURFACE		FINISH		SPECIFICATION		CLASS		TYPE		GRADE		COLOR		THICKNESS			
CODE	NAME	CODE	NAME	CODE	FROM MIL-STD-35-2	CODE	NUMBER	CODE	NUMBER	CODE	NUMBER	CODE	NUMBER	CODE	NAME OR NUMBER FROM FED-STD-595	MAXIMUM		MINIMUM	
																CODE	INCH	CODE	INCH
4541		4542		4543		4544		4545		4546		4547		4548		4549		4550	
4551		4552		4553		4554		4555		4556		4557		4558		4559		4560	
4561		4562		4563		4564		4565		4566		4567		4568		4569		4570	
4571		4572		4573		4574		4575		4576		4577		4578		4579		4580	
4581		4582		4583		4584		4585		4586		4587		4588		4589		4590	
4591		4592		4593		4594		4595		4596		4597		4598		4599		4600	
4601		4602		4603		4604		4605		4606		4607		4608		4609		4610	
4611		4612		4613		4614		4615		4616		4617		4618		4619		4620	
4621		4622		4623		4624		4625		4626		4627		4628		4629		4630	
4631		4632		4633		4634		4635		4636		4637		4638		4639		4640	
4641		4642		4643		4644		4645		4646		4647		4648		4649		4650	
4651		4652		4653		4654		4655		4656		4657		4658		4659		4660	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX A - DIMENSION CHARACTERISTIC TABLE

(See 1.2.6)

Dimension		Minimum		Maximum	
Code	Legend	Code	Value	Code	Value
1010	AA	1011		1012	
1013	AB	1014		1015	
1016	AC	1017		1018	
1019	AD	1020		1021	
1022	AE	1023		1024	
1025	AF	1026		1027	
1028	AG	1029		1030	
1031	AH	1032		1033	
1034	AJ	1035		1036	
1037	AK	1038		1039	
1040	AL	1041		1042	
1043	AM	1044		1045	
1046	AN	1047		1048	
1049	AP	1050		1051	
1052	AQ	1053		1054	
1055	AR	1056		1057	
1058	AS	1059		1060	
1061	AT	1062		1063	
1064	AU	1065		1066	
1067	AV	1068		1069	
1070	AW	1071		1072	
1073	AX	1074		1075	
1076	AY	1077		1078	
1079	AZ	1080		1081	
1082	BA	1083		1084	
1085	BB	1086		1087	
1088	BC	1089		1090	
1091	BD	1092		1093	
1094	BE	1095		1096	
1097	BF	1098		1099	

Dimension		Minimum		Maximum	
Code	Legend	Code	Value	Code	Value
1100	BG	1101		1102	
1103	BH	1104		1105	
1106	BJ	1107		1108	
1109	BK	1110		1111	
1112	BL	1113		1114	
1115	BM	1116		1117	
1118	BN	1119		1120	
1121	BP	1122		1123	
1124	BQ	1125		1126	
1127	BR	1128		1129	
1130	BS	1131		1132	
1133	BT	1134		1135	
1136	BU	1137		1138	
1139	BV	1140		1141	
1142	BW	1143		1144	
1145	BX	1146		1147	
1148	BY	1149		1150	
1151	BZ	1152		1153	
1154	CA	1155		1156	
1157	CB	1158		1159	
1160	CC	1161		1162	
1163	CD	1164		1165	
1166	CE	1167		1168	
1169	CF	1170		1171	
1172	CG	1173		1174	
1175	CH	1176		1177	
1178	CJ	1179		1180	
1181	CK	1182		1183	
1184	CL	1185		1186	
1187	CM	1188		1189	

Specification Requirement Sheet must contain Applicable Codes, Legends, and Values

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX A - DIMENSION CHARACTERISTIC TABLE

(See 1.2.6)

Dimension		Minimum		Maximum	
Code	Legend	Code	Value	Code	Value
1190	CN	1191		1192	
1193	CP	1194		1195	
1196	CQ	1197		1198	
1199	CR	1200		1201	
1202	CS	1203		1204	
1205	CT	1206		1207	
1208	CU	1209		1210	
1211	CV	1212		1213	
1214	CW	1215		1216	
1217	CX	1218		1219	
1220	CY	1221		1222	
1223	CZ	1224		1225	
1226	DA	1227		1228	
1229	DB	1230		1231	
1232	DC	1233		1234	
1235	DD	1236		1237	
1238	DE	1239		1240	
1241	DF	1242		1243	
1244	DG	1245		1246	
1247	DH	1248		1249	
1250	DJ	1251		1252	
1253	DK	1254		1255	
1256	DL	1257		1258	
1359	DM	1360		1361	
1262	DN	1263		1264	
1265	DP	1266		1267	
1268	DQ	1269		1270	
1271	DR	1272		1273	
1274	DS	1275		1276	
1277	DT	1278		1279	

Dimension		Minimum		Maximum	
Code	Legend	Code	Value	Code	Value
1280	DU	1281		1282	
1283	DV	1284		1285	
1286	DW	1287		1288	
1289	DX	1290		1291	
1292	DY	1293		1294	
1295	DZ	1296		1297	
1298	EA	1299		1300	
1301	EB	1302		1303	
1304	EC	1305		1306	
1307	ED	1308		1309	
1310	EE	1311		1312	
1313	EF	1314		1315	
1316	EG	1317		1318	
1319	EH	1320		1321	
1322	EJ	1323		1324	
1325	EK	1326		1327	
1328	EL	1329		1330	
1331	EM	1332		1333	
1334	EN	1335		1336	
1337	EP	1338		1339	
1340	EQ	1341		1342	
1343	ER	1344		1345	
1346	ES	1347		1348	
1349	ET	1350		1351	
1352	EU	1353		1354	
1355	EV	1356		1357	
1358	HT	1359		1360	
1361	ID	1362		1363	
1364	OD	1365		1366	
1367	TH	1368		1369	

Specification Requirement Sheet must contain applicable Codes, Legends, and Values

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX B - APPLICABLE DOCUMENTS

(See 1.2.9)

Characteristic Code	Federal Spec. Number
6015	
6016	
6017	
6018	
6019	
6020	
6021	
6022	
6023	
6024	

Characteristic Code	Military Spec. Number
6035	
6036	
6037	
6038	
6039	
6040	
6041	
6042	
6043	
6044	

Characteristic Code	Federal Standard
6055	
6056	
6057	
6058	
6059	
6060	
6061	
6062	
6063	
6064	

Characteristic Code	Military Standard
6075	
6076	
6077	
6078	
6079	
6080	
6081	
6082	
6083	
6084	

Characteristic Code	Other Publications
6095	
6096	
6097	
6098	
6099	
6100	

Specification Requirement Sheet must contain applicable Codes and Document Numbers

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX C - FIRST ARTICLE INSPECTION

(See 1.2.10)

Group Number		Test Title		Number Units		Allowable Failures	
Code	Value	Code		Code	Value	Code	Value
6125		6126		6127		6128	
6129		6130		6131		6132	
6133		6134		6135		6136	
6137		6138		6139		6140	
6141		6142		6143		6144	
6145		6146		6147		6148	
6149		6150		6151		6152	
6153		6154		6155		6156	
6157		6158		6159		6160	
6161		6162		6163		6164	
6165		6166		6167		6168	
6169		6170		6171		6172	
6173		6174		6175		6176	
6177		6178		6179		6180	
6181		6182		6183		6184	
6185		6186		6187		6188	
6189		6190		6191		6192	
6193		6194		6195		6196	
6197		6198		6199		6200	
6201		6202		6203		6204	
6205		6206		6207		6208	
6209		6210		6211		6212	
6213		6214		6215		6216	
6217		6218		6219		6220	
6221		6222		6223		6224	
6225		6226		6227		6228	
6229		6230		6231		6232	
6233		6234		6235		6236	
6237		6238		6239		6240	
6241		6242		6243		6244	
6245		6246		6247		6248	

Specification Requirement Sheet must contain Codes and Applicable Values

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX D - GROUP A QUALITY CONFORMANCE INSPECTION

(See 1.2.10)

Test Title		Quantity Inspected		AQL			
				Major		Minor	
Code	Value	Code	Value	Code	Value	Code	Value
6315		6316		6317		6318	
6319		6320		6321		6322	
6323		6324		6325		6326	
6327		6328		6329		6330	
6331		6332		6333		6334	
6335		6336		6337		6338	
6339		6340		6341		6342	
6343		6344		6345		6346	
6347		6348		6349		6350	
6351		6352		6353		6354	
6355		6356		6357		6358	
6359		6360		6361		6362	
6363		6364		6365		6366	
6367		6368		6369		6370	
6371		6372		6373		6374	
6375		6376		6377		6378	

Specification Requirement Sheet must contain Codes and applicable Values

SOURCE TABLE

(See 1.2.60)

SOURCE(S)			
CODE	FSCM	CODE	MFG. PART NO.
5001		5002	
5003		5004	
5005		5006	
5007		5008	
5009		5010	
5011		5012	

Specification Requirement Sheet must contain Codes, FSCM, and Part No.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX E-1 - GROUP B QUALITY CONFORMANCE INSPECTION

(See 1.2.10)

Test Title		FIXED SAMPLE PLAN			
		Quantity Inspected		Defects Allowed	
Code	Value	Code	Value	Code	Value
6410		6411		6412	
6413		6414		6415	
6416		6417		6418	
6419		6420		6421	
6422		6423		6424	
6425		6426		6427	
6428		6429		6430	
6431		6432		6433	
6434		6435		6436	
6437		6438		6439	
6440		6441		6442	
6443		6444		6445	
6446		6447		6448	
6449		6450		6451	
6452		6453		6454	
6455		6456		6457	
6458		6459		6460	
6461		6462		6463	
6464		6465		6466	
6467		6468		6469	
6470		6471		6472	
6473		6474		6475	
6476		6477		6478	
6479		6480		6481	
6482		6483		6484	

Specification Requirement Sheet must contain Codes and Applicable Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX E-2 - GROUP B QUALITY CONFORMANCE INSPECTION

(See 1.2.10)

Test Title		STATISTICAL SAMPLE PLAN			
		Inspection Level		AQL	
Code	Value	Code	Value	Code	Value
6410		6715		6716	
6413		6717		6718	
6416		6719		6720	
6419		6721		6722	
6422		6723		6724	
6425		6725		6726	
6428		6727		6728	
6431		6729		6730	
6434		6731		6732	
6437		6733		6734	
6440		6735		6736	
6443		6737		6738	
6446		6739		6740	
6449		6741		6742	
6452		6743		6744	
6455		6745		6746	
6458		6747		6748	
6461		6749		6750	
6464		6751		6752	
6467		6753		6754	
6470		6755		6756	
6473		6757		6758	
6476		6759		6760	
6479		6761		6762	
6482		6763		6764	

Specification Requirement Sheet must contain Codes and applicable Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX F - GROUP C QUALITY CONFORMANCE INSPECTION

(See 1.2.10)

Test Title		Quantity Inspected		Defects Allowed	
Code	Value	Code	Value	Code	Value
6525		6526		6527	
6528		6529		6530	
6531		6532		6533	
6534		6535		6536	
6537		6538		6539	
6540		6541		6542	
6543		6544		6545	
6546		6547		6548	
6549		6550		6551	
6552		6553		6554	
6555		6556		6557	
6558		6559		6560	
6561		6562		6563	
6564		6565		6566	
6567		6568		6569	
6570		6571		6572	
6573		6574		6575	
6576		6577		6578	
6579		6580		6581	
6582		6583		6584	
6585		6586		6587	
6588		6589		6590	
6591		6592		6593	
6594		6595		6596	
6597		6598		6599	
6600		6601		6602	
6603		6604		6605	
6606		6607		6608	
6609		6610		6611	
6612		6613		6614	

Specification Requirement Sheet must contain Codes and applicable Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX G - QUALITY CONFORMANCE SEQUENCE TABLE

(See 1.2.10)

Group A Test Title Added		Group A Preceding Inspection Test	
Code	Value	Code	Value
6810		6811	
6812		6813	
6814		6815	
6816		6817	
6818		6819	
6820		6821	
6822		6823	
6824		6825	
6826		6827	
6828		6829	
6830		6831	
6832		6833	
6834		6835	
6836		6837	
6838		6839	

Specification Requirement Sheet must contain Codes and applicable Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX G - QUALITY CONFORMANCE SEQUENCE TABLE

(See 1.2.10)

Group B Test Title Added		Group B Preceding Inspection Test	
Code	Value	Code	Value
6840		6841	
6842		6843	
6844		6845	
6846		6847	
6848		6849	
6850		6851	
6852		6853	
6854		6855	
6856		6857	
6858		6859	
6860		6861	
6862		6863	
6864		6865	
6866		6867	
6868		6869	

Specification Requirement Sheet must contain Codes and applicable Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX G - QUALITY CONFORMANCE SEQUENCE TABLE

(See 1.2.10)

Group C Test Title Added		Group C Preceding Inspection Test	
Code	Value	Code	Value
6950		6951	
6952		6953	
6954		6955	
6956		6957	
6958		6959	
6960		6961	
6962		6963	
6964		6965	
6966		6967	
6968		6969	
6970		6971	
6972		6973	
6974		6975	
6976		6977	
6978		6979	

Specification Requirement Sheet must contain Codes and applicable Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX H - DELETED TEST TABLE

(See 1.2.10)

(When specific tests are not required)

Group A Deleted Test Title		Group B Deleted Test Title		Group C Deleted Test Title	
Code	Value	Code	Value	Code	Value
6875		6890		6905	
6876		6891		6906	
6877		6892		6907	
6878		6893		6908	
6879		6894		6909	
6880		6895		6910	
6881		6896		6911	
6882		6897		6912	
6883		6898		6913	
6884		6899		6914	
6885		6900		6915	
6886		6901		6916	
6887		6902		6917	
6888		6903		6918	
6889		6904		6919	

Specification Requirement Sheet must contain applicable Codes and Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX J - DELETED FIRST ARTICLE TESTS

(See 1.2.10)

FIRST ARTICLE DELETED TEST TITLE	
CODE	VALUE
6980	
6981	
6982	
6983	
6984	
6985	
6986	
6987	
6988	
6989	

Specification Requirement must contain Codes and applicable Values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX S - SOURCE TABULATION TABLE

(See 1.2.60)

CODE	DASH NO.	CODE	FSCM	MFG. PART NO.
9051		9151		
		9152		
		9153		
		9154		
		9155		
		9156		
		9157		
		9158		
		9159		
		9160		
		9161		
		9162		
		9163		
		9164		
		9165		
		9166		
		9167		
		9168		
		9169		
		9170		
		9171		
		9172		
		9173		
		9174		
		9175		
		9176		
		9177		
		9178		
		9179		
		9180		
9052		9181		
		9182		
		9183		
		9184		
		9185		
		9186		
		9187		
		9188		
		9189		
		9190		
		9191		
		9192		
		9193		
		9194		
		9195		
		9196		
		9197		
		9198		
		9199		
		9200		
		9201		
		9202		
		9203		
		9204		
		9205		
		9206		
		9207		
		9208		
		9209		
		9210		
9053		9451		
		9452		
		9453		
		9454		
		9455		
		9456		
		9457		
		9458		
		9459		
		9460		
		9461		
		9462		
		9463		
		9464		
		9465		
		9466		
		9467		
		9468		
		9469		
		9470		
		9471		
		9472		
		9473		
		9474		
		9475		
		9476.		
		9477		
		9478		
		9479		
		9480		
9054		9481		
		9482		
		9483		
		9484		
		9485		
		9486		
		9487		
		9488		
		9489		
		9490		
		9491		
		9492		
		9493		
		9494		
		9495		
		9496		
		9497		
		9498		
		9499		
		9500		
		9501		
		9502		
		9503		
		9504		
		9505		
		9506		
		9507		
		9508		
		9509		
		9510		
9055				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX S - SOURCE TABULATION TABLE

(See 1.2.60)

CODE	DASH NO.	CODE	FSCM	CODE	MFG. PART NO.
9061		9211		9511	
		9212		9512	
		9213		9513	
		9214		9514	
		9215		9515	
		9216		9516	
9062		9217		9517	
		9218		9518	
		9219		9519	
		9220		9520	
		9221		9521	
		9222		9522	
9063		9223		9523	
		9224		9524	
		9225		9525	
		9226		9526	
		9227		9527	
		9228		9528	
9064		9229		9529	
		9230		9530	
		9231		9531	
		9232		9532	
		9233		9533	
		9234		9534	
9065		9235		9535	
		9236		9536	
		9237		9537	
		9238		9538	
		9239		9539	
		9240		9540	
9066		9241		9541	
		9242		9542	
		9243		9543	
		9244		9544	
		9245		9545	
		9246		9546	
9067		9247		9547	
		9248		9548	
		9249		9549	
		9250		9550	
		9251		9551	
		9252		9552	
9068		9253		9553	
		9254		9554	
		9255		9555	
		9256		9556	
		9257		9557	
		9258		9558	
9069		9259		9559	
		9260		9560	
		9261		9561	
		9262		9562	
		9263		9563	
		9264		9564	
9070		9265		9565	
		9266		9566	
		9267		9567	
		9268		9568	
		9269		9569	
		9270		9570	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX S - SOURCE TABULATION TABLE

(See 1.2.60)

CODE	DASH NO.	CODE	FSCM	CODE	MFG. PART NO.
9071		9271		9571	
		9272		9572	
		9273		9573	
		9274		9574	
		9275		9575	
		9276		9576	
9072		9277		9577	
		9278		9578	
		9279		9579	
		9280		9580	
		9281		9581	
		9282		9582	
9073		9283		9583	
		9284		9584	
		9285		9585	
		9286		9586	
		9287		9587	
		9288		9588	
9074		9289		9589	
		9290		9590	
		9291		9591	
		9292		9592	
		9293		9593	
		9294		9594	
9075		9295		9595	
		9296		9596	
		9297		9597	
		9298		9598	
		9299		9599	
		9300		9600	

CODE	DASH NO.	CODE	FSCM	CODE	MFG. PART NO.
9076		9301		9601	
		9302		9602	
		9303		9603	
		9304		9604	
		9305		9605	
		9306		9606	
9077		9307		9607	
		9308		9608	
		9309		9609	
		9310		9610	
		9311		9611	
		9312		9612	
9078		9313		9613	
		9314		9614	
		9315		9615	
		9316		9616	
		9317		9617	
		9318		9618	
9079		9319		9619	
		9320		9620	
		9321		9621	
		9322		9622	
		9323		9623	
		9324		9624	
9080		9325		9625	
		9326		9626	
		9327		9627	
		9328		9628	
		9329		9629	
		9330		9630	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX S - SOURCE TABULATION TABLE

(See 1.2.60)


CODE	DASH NO.	CODE	FSCM	CODE	MFG. PART NO.
9081		9331		9631	
		9332		9632	
		9333		9633	
		9334		9634	
		9335		9635	
		9336		9636	
9082		9337		9637	
		9338		9638	
		9339		9639	
		9340		9640	
		9341		9641	
		9342		9642	
9083		9343		9643	
		9344		9644	
		9345		9645	
		9346		9646	
		9347		9647	
		9348		9648	
9084		9349		9649	
		9350		9650	
		9351		9651	
		9352		9652	
		9353		9653	
		9354		9654	
9085		9355		9655	
		9356		9656	
		9357		9657	
		9358		9658	
		9359		9659	
		9360		9660	

CODE	DASH NO.	CODE	FSCM	CODE	MFG. PART NO.
9086		9361		9661	
		9362		9662	
		9363		9663	
		9364		9664	
		9365		9665	
		9366		9666	
9087		9367		9667	
		9368		9668	
		9369		9669	
		9370		9670	
		9371		9671	
		9372		9672	
9088		9373		9673	
		9374		9674	
		9375		9675	
		9376		9676	
		9377		9677	
		9378		9678	
9089		9379		9679	
		9380		9680	
		9381		9681	
		9382		9682	
		9383		9683	
		938/		9684	
9090		9385		9685	
		9386		9686	
		9387		9687	
		9388		9688	
		9389		9689	
		9390		9690	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX S - SOURCE TABULATION TABLE

(See 1.2.60)

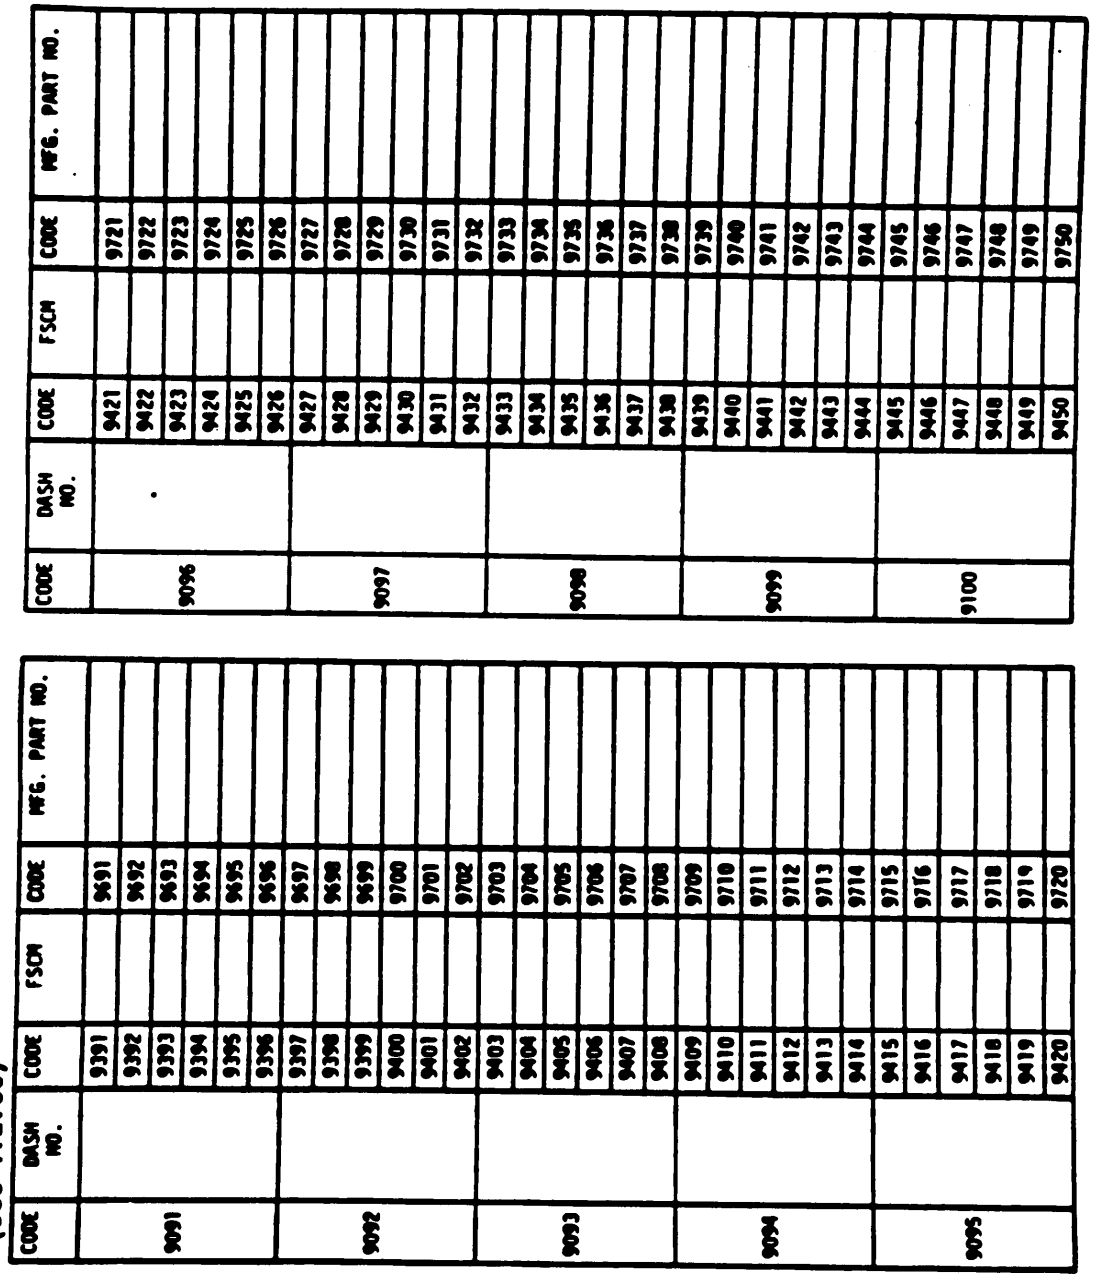

CODE	DASH NO.	CODE	FSCM	MFG. PART NO.
9091		9391		
		9392		
		9393		
		9394		
		9395		
		9396		
9092		9397		
		9398		
		9399		
		9400		
		9401		
		9402		
9093		9403		
		9404		
		9405		
		9406		
		9407		
		9408		
9094		9409		
		9410		
		9411		
		9412		
		9413		
		9414		
9095		9415		
		9416		
		9417		
		9418		
		9419		
		9420		
9096		9421		
		9422		
		9423		
		9424		
		9425		
		9426		
9097		9427		
		9428		
		9429		
		9430		
		9431		
		9432		
9098		9433		
		9434		
		9435		
		9436		
		9437		
		9438		
9099		9439		
		9440		
		9441		
		9442		
		9443		
		9444		
9100		9445		
		9446		
		9447		
		9448		
		9449		
		9450		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 1.3

CONFIGURATION AND DRAWINGS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 1.3.1

FIGURE TITLES VS FIGURE NUMBERS

Title	Figure Number
Actuators, Electromechanical, Linear	251-01-1 thru 12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 1.3.2

LEGEND INDEX

AA	Body length
AB	Body width
AC	Body height
AD	Extended length fronm attaching holes centerline
AE	Retracted length from attaching holes centerline
AF	Distance between mounting hole centerline and end of body
AG	Hole diameter
AH	Ram diameter
AJ	Thread size
AK	Thread length
AL	Connector size
AM	Nut size
AN	Cable overall length
AP	Fitting width
AQ	Fitting radius
AR	Distance between fitting centerline and bottom of body
AS	Flange diameter
AT	Rod end fitting diameter
AU	Bearing inner diameter
AV	Rod end fitting width
AW	Motor diameter

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 1.3.2 LEGEND INDEX (CONT.)

AX	Transmitter height
AY	Thermal overload height
AZ	Distance between hole centerline and end of ram
BA	Body diameter
BB	Ram Width
BC	Ram height
BD	Wire length
BE	Retracted length
BF	Distance from base to end of motor
BG	Distance between clevis ends
BH	Extended length
BJ	Distance between mounting holes
BK	Distance between mounting hole and body centerlines
BL	Distance between ram centerline and body edge
BM	Hole thread size
BN	Hole thread depth
BP	Rack cover diameter
BQ	Clevis pin size
BR	Flange length
BS	Rod end bearing inner diameter

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

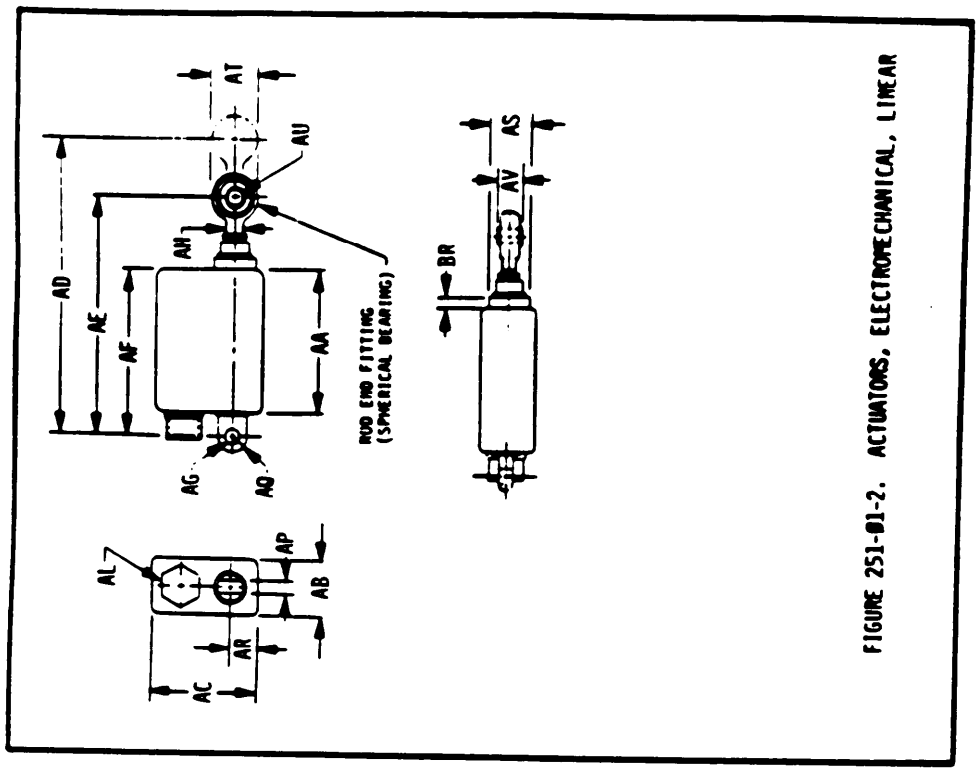


FIGURE 251-01-2. ACTUATORS, ELECTROMECHANICAL, LINEAR

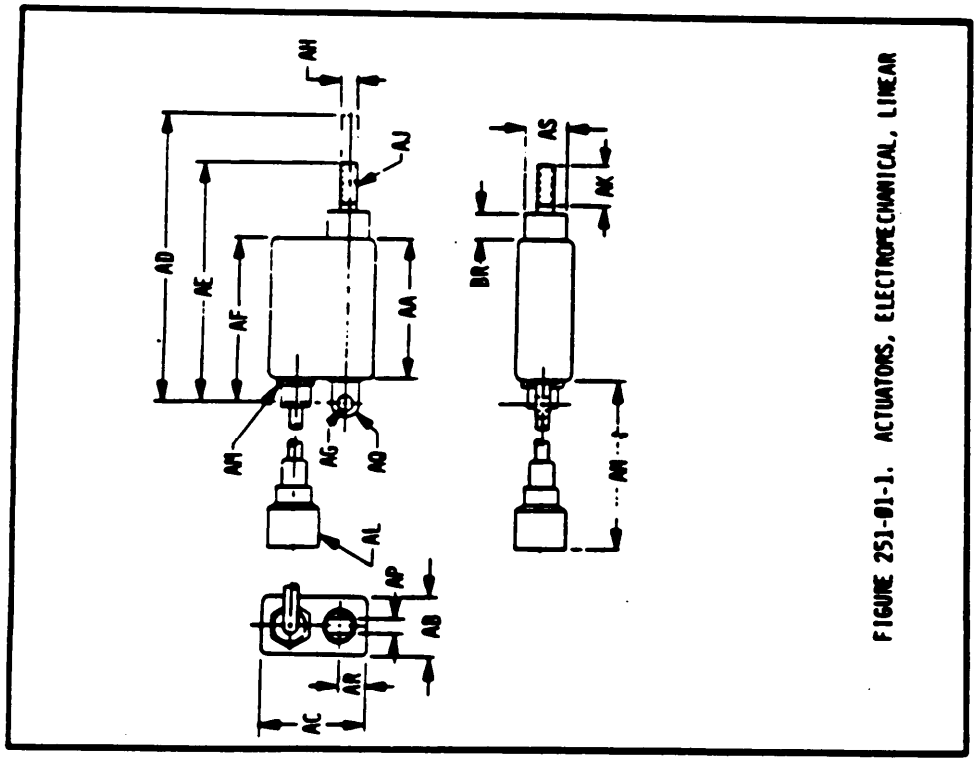


FIGURE 251-01-1. ACTUATORS, ELECTROMECHANICAL, LINEAR

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

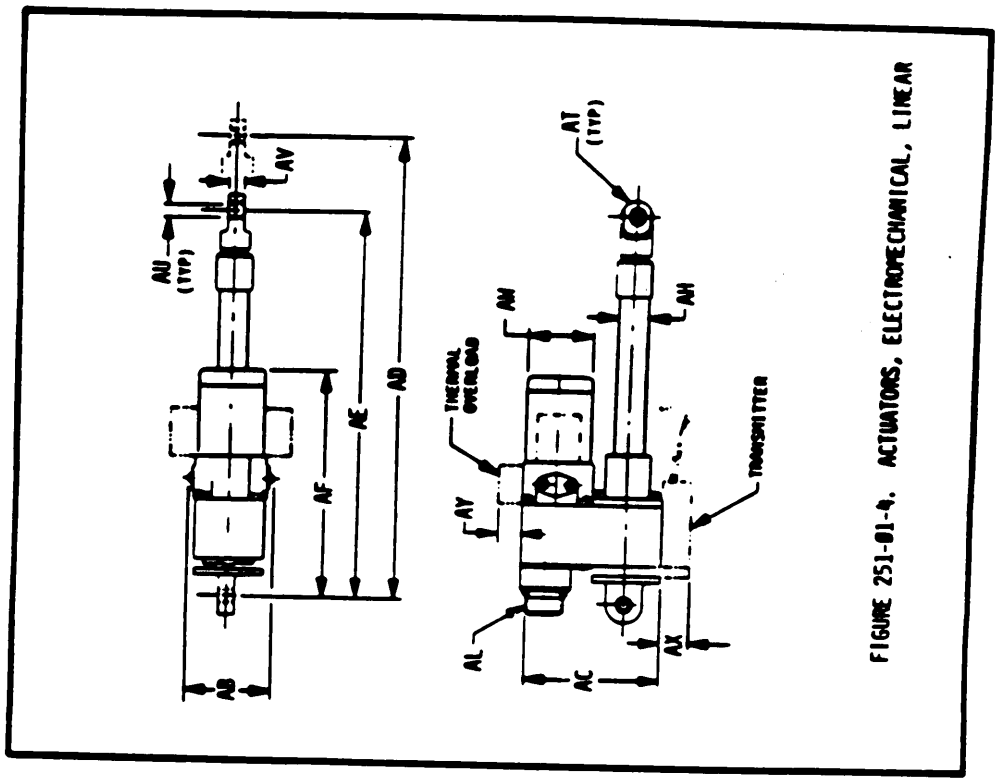


FIGURE 251-01-4. ACTUATORS, ELECTROMECHANICAL, LINEAR

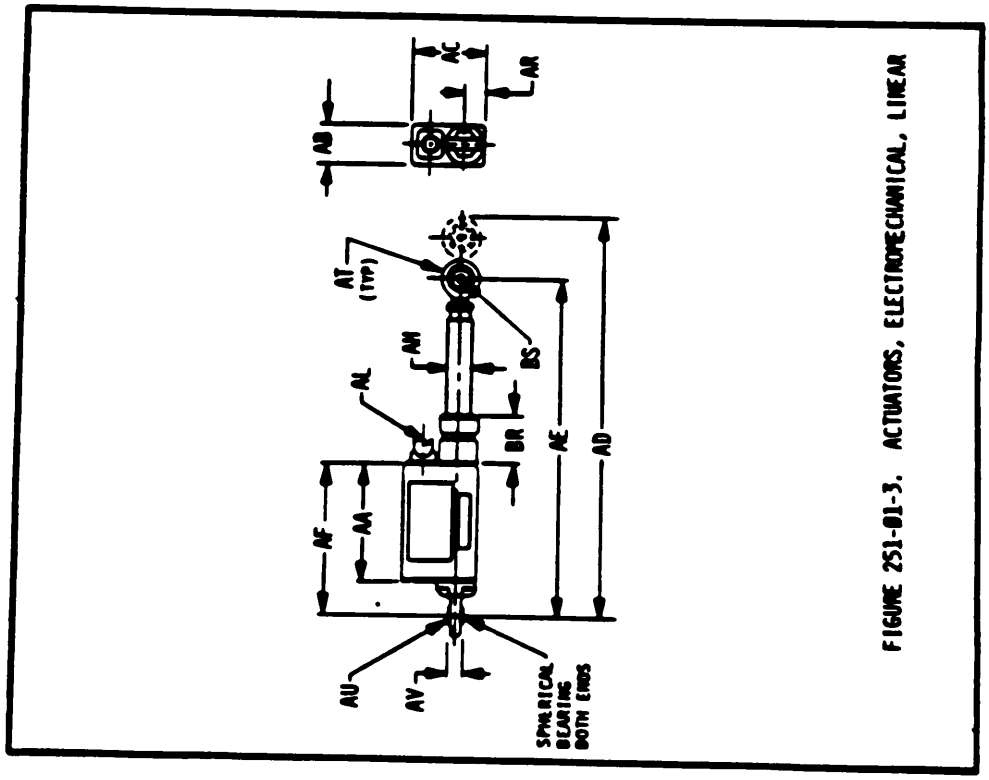


FIGURE 251-01-3. ACTUATORS, ELECTROMECHANICAL, LINEAR

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

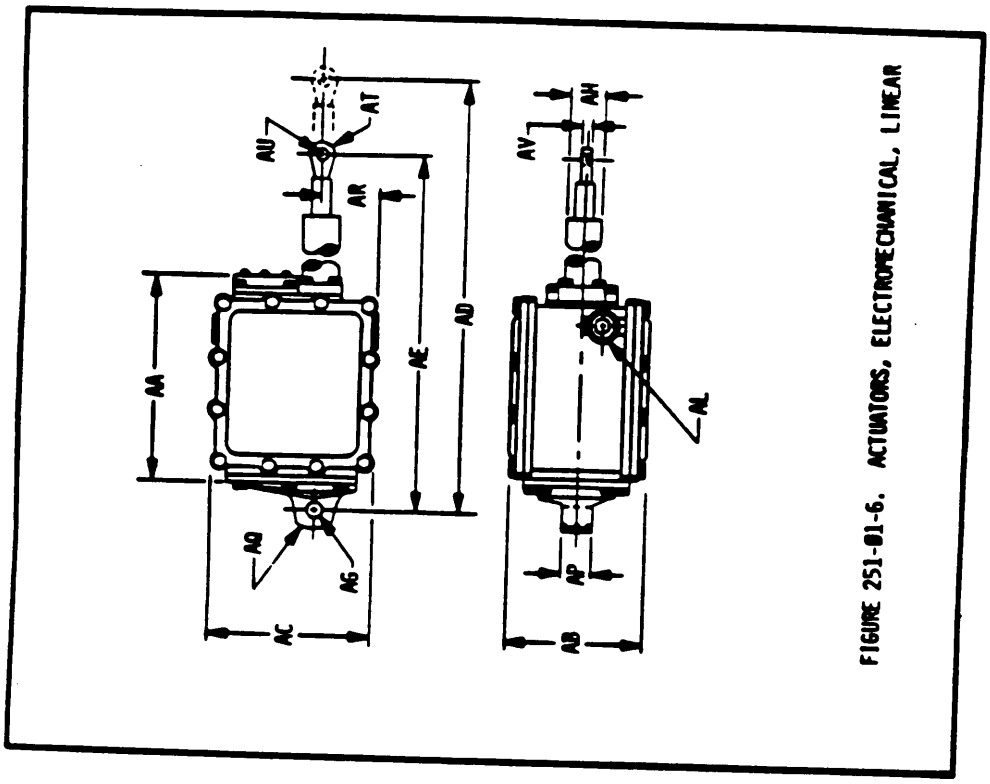


FIGURE 251-01-6. ACTUATORS, ELECTROMECHANICAL, LINEAR

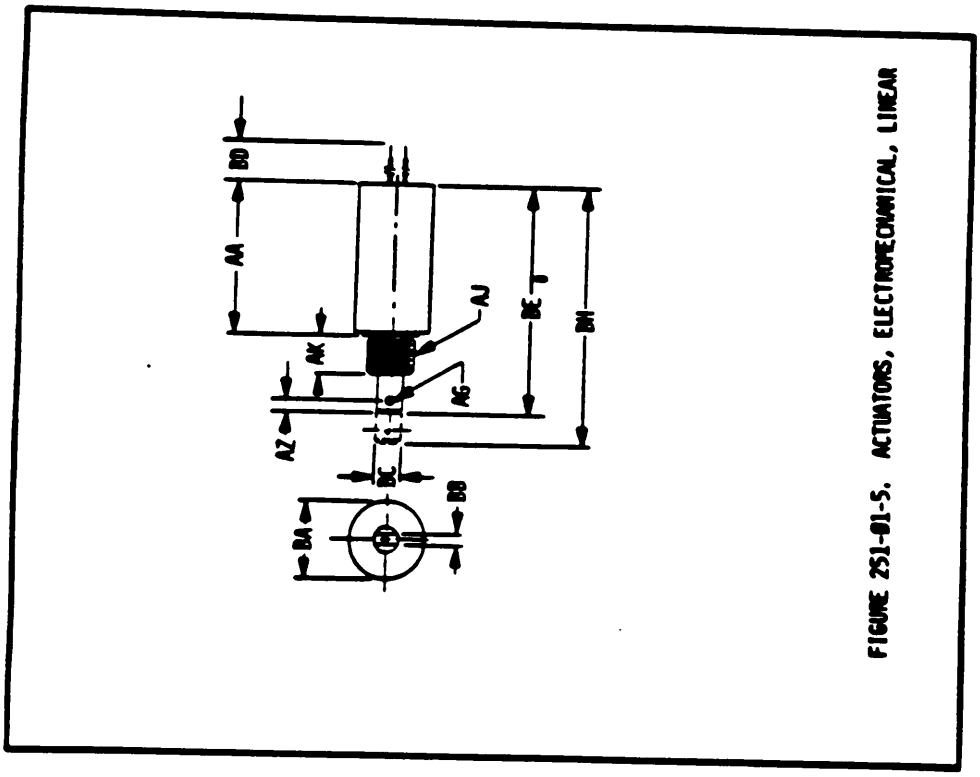


FIGURE 251-01-5. ACTUATORS, ELECTROMECHANICAL, LINEAR

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

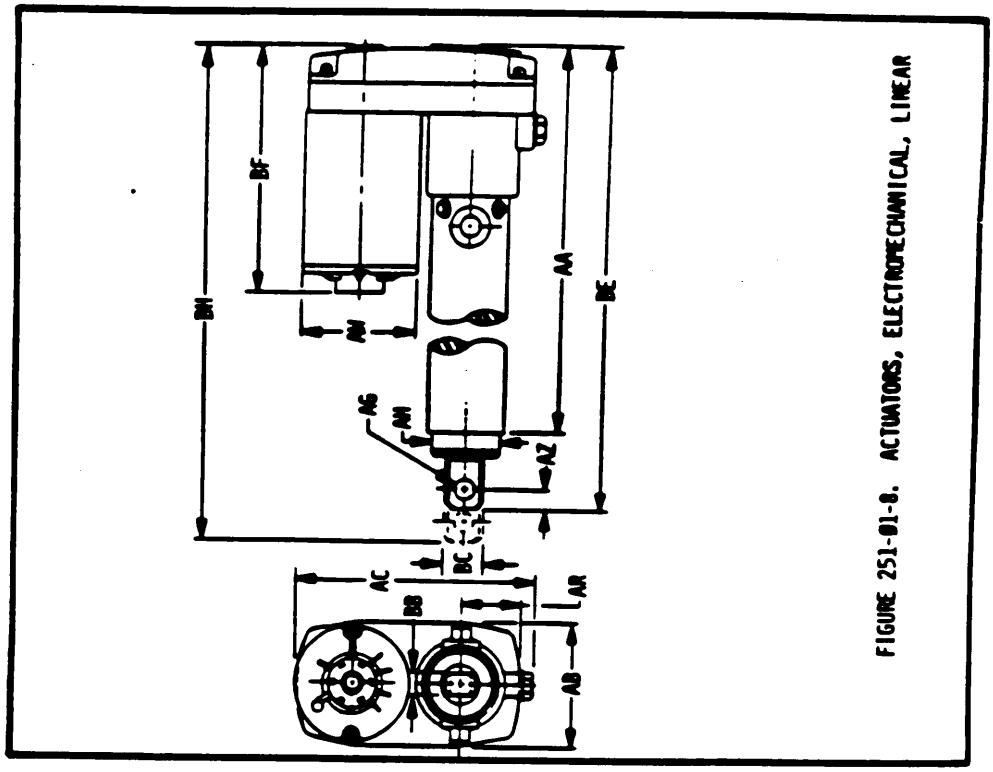


FIGURE 251-01-8. ACTUATORS, ELECTROMECHANICAL, LINEAR

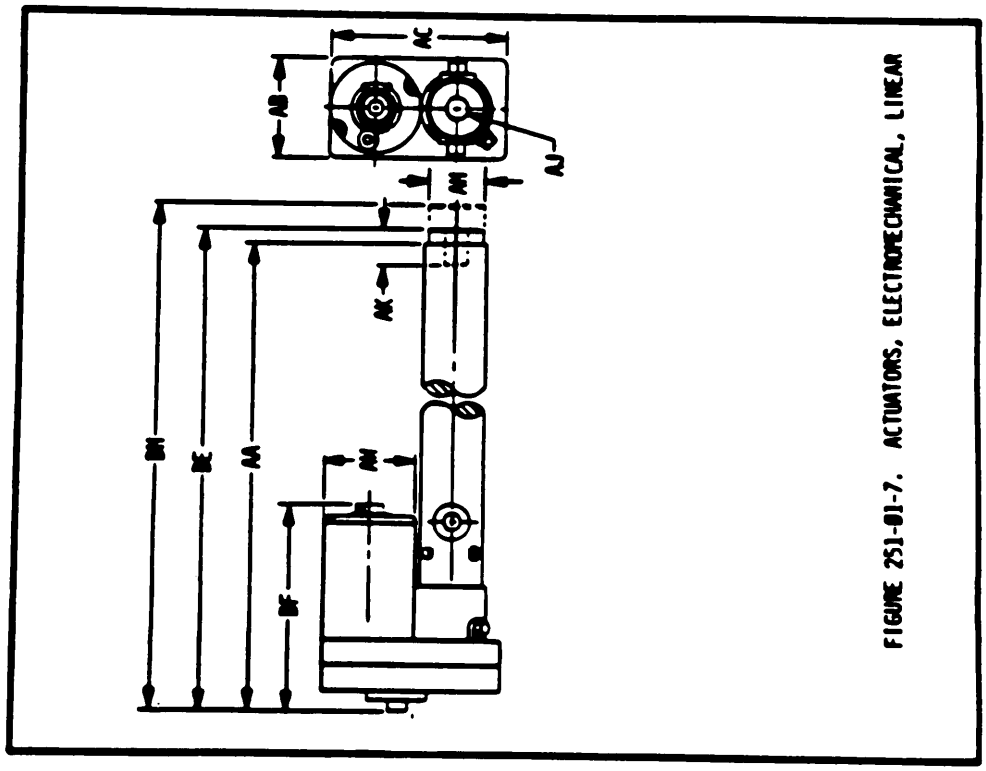


FIGURE 251-01-7. ACTUATORS, ELECTROMECHANICAL, LINEAR

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

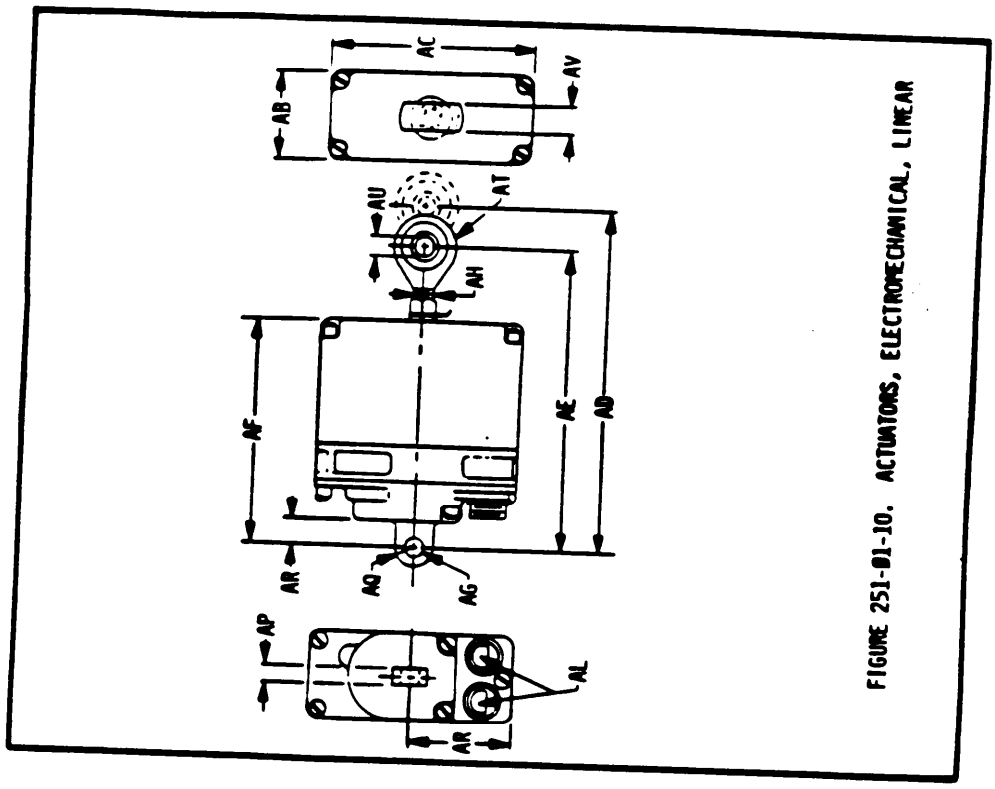


FIGURE 251-01-10. ACTUATORS, ELECTROMECHANICAL, LINEAR

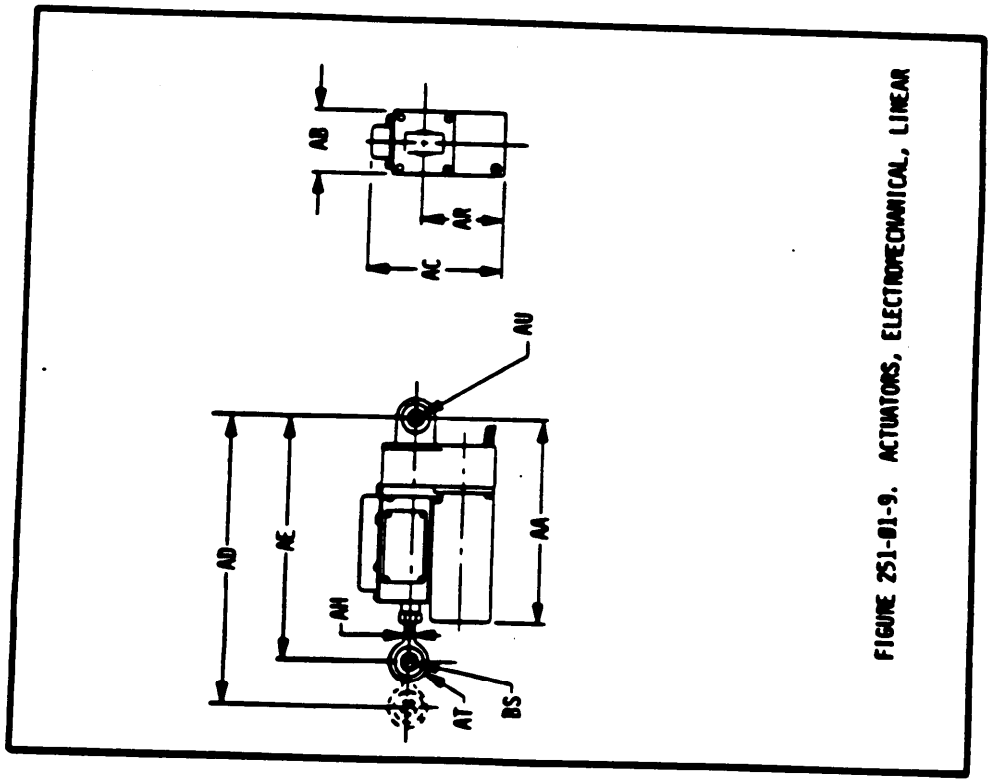


FIGURE 251-01-9. ACTUATORS, ELECTROMECHANICAL, LINEAR

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

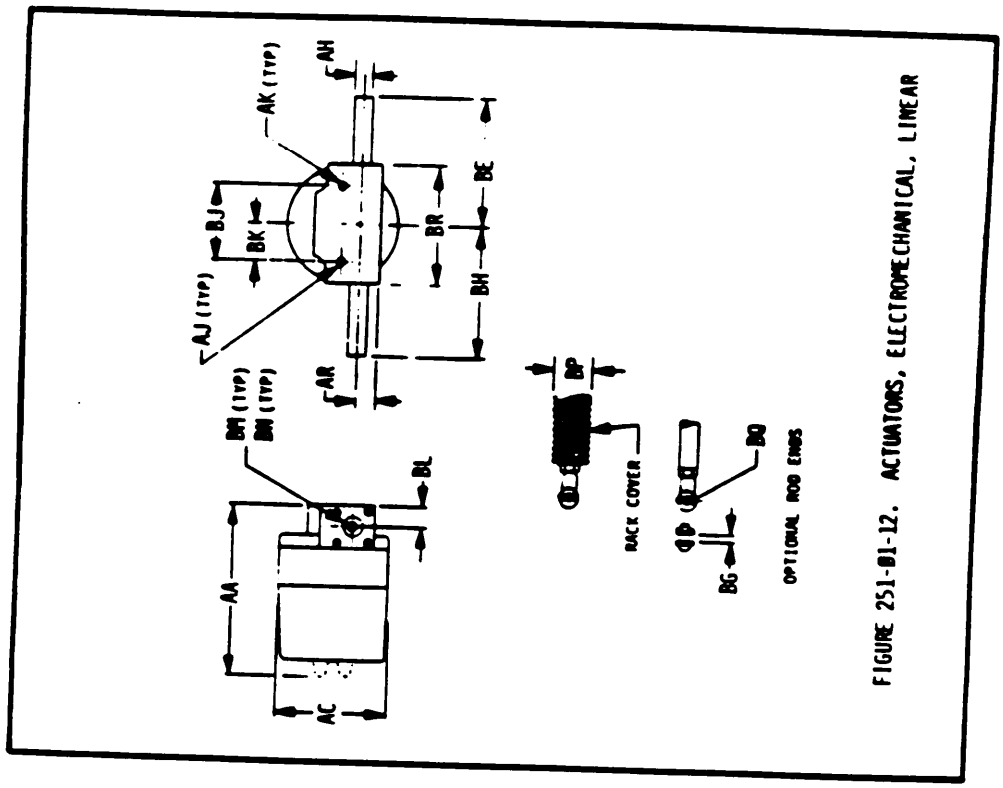


FIGURE 251-01-12. ACTUATORS, ELECTROMECHANICAL, LINEAR

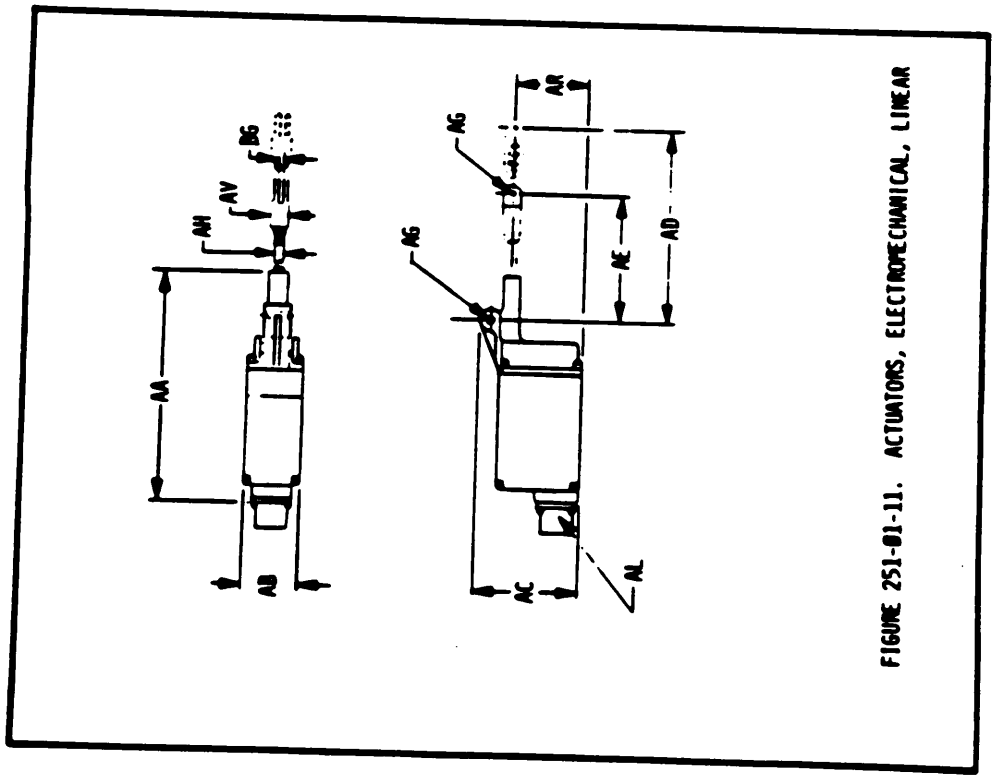


FIGURE 251-01-11. ACTUATORS, ELECTROMECHANICAL, LINEAR

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET

TITLE CODE (1 2 3 4 5 6) | SERIAL NO. (7 8 9 10 11 12)

MICROFILM REQUIRED: YES ☐ NO ☐

REQUESTERS NAME _____

MAILING ADDRESS _____

REVISION TO AEDPS DOCUMENT NO. ☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐

PHONE NO. A/C _____

ACTUATORS, ELECTROMECHANICAL, LINEAR CHARACTERISTIC NAME	CHAR CODE 13	14	15	16
*DATE	1	Ø	Ø	3
*FSCM/CODE IDENT OF REQUESTER	1	Ø	Ø	4
*PRIME CONTRACT NUMBER	1	Ø	Ø	5
*APPLICABLE GENERAL SPECIFICATION FROM SPECIFICATION TITLE INDEX	1	Ø	Ø	6
*ITEM APPLICATION	1	Ø	Ø	8
*DRAWING FIGURE NUMBER	1	Ø	Ø	9
*COMPLETE THE REQUIRED CODES FROM APPENDIX "A" AND OTHER APPENDICES AND CODES AS REQUIRED TO GENERATE THE DESIRED DOCUMENT	USE BLANK SRS			
*DESIGN CHARACTERISTICS - SELECT ONE OR MORE APPROPRIATE CODE(S)				
*SOURCE (SELECT 6873 OR 6874 AND COMPLETE AT LEAST ONE LINE OF THE SOURCE TABLE)	USE BLANK SRS			
*FIRST ARTICLE INSPECTION - SELECT THE APPROPRIATE CODE				
*GROUP A INSPECTION - SELECT THE APPROPRIATE CODE				
*GROUP B INSPECTION - SELECT THE APPROPRIATE CODE				
*TEST METHOD - SELECT THE APPROPRIATE CODE				

VALUE

20 25 30 35 40 45 50 55 60 65 70 75 80

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET

TITLE CODE 1 2 3 4 5 6 SERIAL NO. 7 8 9 10 11 12

MICROFILM REQUIRED: YES ▱ NO ▱

REQUESTERS NAME _____

MAILING ADDRESS _____

REVISION TO AEDPS DOCUMENT NO.: _____

PHONE NO. A/C _____

CHARACTERISTIC NAME	CHAR CODE 13 14 15 16	VALUE 20 25 30 35 40 45 50 55 60 65 70 75 80

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET
TABULATION TABLE

TITLE CODE (1 2 3 4 5 6) SERIAL NO. (7 8 9 10 11 12)

DASH NUMBER	CHARACTERISTIC CODE COL. 13–16	TABULATION CODE AND VALUES COL. 17—	CHARACTERISTIC CODE COL. 13–16	TABULATION CODE AND VALUES COL. 17—	CHARACTERISTIC CODE COL. 13–16	TABULATION CODE AND VALUES COL. 17—	CHARACTERISTIC CODE COL. 13–16	TABULATION CODE AND VALUES COL. 17—	CHARACTERISTIC CODE COL. 13–16	TABULATION CODE AND VALUES COL. 17—	CHARACTERISTIC CODE COL. 13–16	TABULATION CODE AND VALUES COL. 17—	CHARACTERISTIC CODE COL. 13–16	TABULATION CODE AND VALUES COL. 17—	CHARACTERISTIC CODE COL. 13–16	TABULATION CODE AND VALUES COL. 17—	CHARACTERISTIC CODE COL. 13–16	TABULATION CODE AND VALUES COL. 17—	CHARACTERISTIC CODE COL. 13–16	TABULATION CODE AND VALUES COL. 17—
	8000		8051		8102		8153		8204		8255		8306		8357		8408		8459	
01	8001		8052		8103		8154		8205		8256		8307		8358		8409		8460	
02	8002		8053		8104		8155		8206		8257		8308		8359		8410		8461	
03	8003		8054		8105		8156		8207		8258		8309		8360		8411		8462	
04	8004		8055		8106		8157		8208		8259		8310		8361		8412		8463	
05	8005		8056		8107		8158		8209		8260		8311		8362		8413		8464	
06	8006		8057		8108		8159		8210		8261		8312		8363		8414		8465	
07	8007		8058		8109		8160		8211		8262		8313		8364		8415		8466	
08	8008		8059		8110		8161		8212		8263		8314		8365		8416		8467	
09	8009		8060		8111		8162		8213		8264		8315		8366		8417		8468	
10	8010		8061		8112		8163		8214		8265		8316		8367		8418		8469	
11	8011		8062		8113		8164		8215		8266		8317		8368		8419		8470	
12	8012		8063		8114		8165		8216		8267		8318		8369		8420		8471	
13	8013		8064		8115		8166		8217		8268		8319		8370		8421		8472	
14	8014		8065		8116		8167		8218		8269		8320		8371		8422		8473	
15	8015		8066		8117		8168		8219		8270		8321		8372		8423		8474	
16	8016		8067		8118		8169		8220		8271		8322		8373		8424		8475	
17	8017		8068		8119		8170		8221		8272		8323		8374		8425		8476	
18	8018		8069		8120		8171		8222		8273		8324		8375		8426		8477	
19	8019		8070		8121		8172		8223		8274		8325		8376		8427		8478	
20	8020		8071		8122		8173		8224		8275		8326		8377		8428		8479	
21	8021		8072		8123		8174		8225		8276		8327		8378		8429		8480	
22	8022		8073		8124		8175		8226		8277		8328		8379		8430		8481	
23	8023		8074		8125		8176		8227		8278		8329		8380		8431		8482	
24	8024		8075		8126		8177		8228		8279		8330		8381		8432		8483	
25	8025		8076		8127		8178		8229		8280		8331		8382		8433		8484	
26	8026		8077		8128		8179		8230		8281		8332		8383		8434		8485	
27	8027		8078		8129		8180		8231		8282		8333		8384		8435		8486	
28	8028		8079		8130		8181		8232		8283		8334		8385		8436		8487	
29	8029		8080		8131		8182		8233		8284		8335		8386		8437		8488	
30	8030		8081		8132		8183		8234		8285		8336		8387		8438		8489	
31	8031		8082		8133		8184		8235		8286		8337		8388		8439		8490	
32	8032		8083		8134		8185		8236		8287		8338		8389		8440		8491	
33	8033		8084		8135		8186		8237		8288		8339		8390		8441		8492	
34	8034		8085		8136		8187		8238		8289		8340		8391		8442		8493	
35	8035		8086		8137		8188		8239		8290		8341		8392		8443		8494	
36	8036		8087		8138		8189		8240		8291		8342		8393		8444		8495	
37	8037		8088		8139		8190		8241		8292		8343		8394		8445		8496	
38	8038		8089		8140		8191		8242		8293		8344		8395		8446		8497	
39	8039		8090		8141		8192		8243		8294		8345		8396		8447		8498	
40	8040		8091		8142		8193		8244		8295		8346		8397		8448		8499	
41	8041		8092		8143		8194		8245		8296		8347		8398		8449		8500	
42	8042		8093		8144		8195		8246		8297		8348		8399		8450		8501	
43	8043		8094		8145		8196		8247		8298		8349		8400		8451		8502	
44	8044		8095		8146		8197		8248		8299		8350		8401		8452		8503	
45	8045		8096		8147		8198		8249		8300		8351		8402		8453		8504	
46	8046		8097		8148		8199		8250		8301		8352		8403		8454		8505	
47	8047		8098		8149		8200		8251		8302		8353		8404		8455		8506	
48	8048		8099		8150		8201		8252		8303		8354		8405		8456		8507	
49	8049		8100		8151		8202		8253		8304		8355		8406		8457		8508	
50	8050		8101		8152		8203		8254		8305		8356		8407		8458		8509	

1-47/150

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426

PREVIOUS EDITION IS OBSOLETE.

(TO DETACH THIS FO CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Missile Command
ATTN: AMSMI-RCS
Redstone Arsenal, AL 35809

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.