MIL-STD-35-75(Ml)
31 DECEMBER 1974

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

MICROWAVE/WAVEGUIDE COMPONENTS

FSC-EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL COMMAND
Washington, D.C. 20315

Automated Engineering
Document Preparation System,
Microwave/Waveguide Components

MIL-STD-35-75(MI)

1. This Military Standard is approved by the U.S. Army Materiel Command, Department of the Army, and is mandatory for use by all its activities. All other military activities are required to employ this Standard where suitable.

2. Recommended corrections, additions or deletions should be addressed to Comnander, U.S. Army Missile Command, ATTN: AMSMI-RCS, Redstone Arsenal, Alabama 35809.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

MIL-STD-35-75(MI)

FOREWORD

1. The purpose of MIL-STD-35-75(MI) is to facilitate the preparation of Military Specification, Exceptions for Microwave/Waveguide components.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the basic MIL-STD-35, along with MIL-STD-35-1 for Materials, and MIL-STD-35-2 for Finishes.

3. It is important that the procedure described in the basic document (MIL-STD-35C) and subsequent revisions be followed explicitly in order for the computer to produce a document suitable for competitive procurement. Information which is standard for all dash numbered parts has been included in the basic document at the issuance of MIL-STD-35C. This information is not repeated in each dash numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS

SECTION	TITLE	INSTR PAGE	SRL PAGE
SECTION 1	INTRODUCTION	1-1	
1.1	Scope	1-1	
1.2	Purpose	1-1	
1.3	Format	1-1	
1.4	Military Specification, Exception Title Index	1-2	
1.4.1	Title	1-2	
1.4.2	Index	1-3	
SECTION 2	APPLICABLE DOCUMENTS	2-1	
SECTION 3	DEFINITIONS	3-1	
SECTION 4	GENERAL DESCRIPTION OF AEDPS	4-1	
SECTION 5	DETAILED DESCRIPTION OF AEDPS	5-1	
5.1	Introduction	5-1	
5.2	Specification Requirement Sheet (SRS)	5-1	
5.3	Specification Requirements	5-1	
5.4	General Specification Requirements	5-2	
5.4.1	Code 1006 Requirements and Test Methods	5-2	
5.4.2	Approved Item Name Code	5-3	
5.5	Organization of Design and Test Oata	5-3	
5.6	Dimensions and Figures	5-4	5-67

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS (CONT)

SECTION	TITLE	INSTR PAGE	SRL PAGE
5.7	Applicable Documents	5-4	
5.8	Tabulation	5-6	
5.9	Design Characteristics (All Components)	5-8	5-67
5.9.1	Frequency Range	5-8	5-67
5.9.2	Power (Attenuators and Switches)	5-8	5-67
5.9.3	Temperature Range	5-8	5-67
5.9.4	Impedance	5-9	5-68
5.9.5	Voltage Standing Wave Ratio (VSWR)	5-9	5-68
5.9.6	Classification	5-10	5-68
5.9.7	Waveguide	5-10	5-68
5.9.8	Flanges	5-11	5-69
5.9.9	Connectors	5-12	5-70
5.9.10	Weight	5-12	5-70
5.10	Design Characteristics (Adapters)	5-13	5-70
5.10.1	Coaxial End Coupling	5-13	5-70
5.11	Design Characteristics (Attenuators)	5-13	5-70
5.11.1	Eliminate Backlash	5-13	5-70
5.11.2	Dial Readout	5-13	5-71
5.11.3	Attenuation	5-14	5-71
5.11.4	Phase Shift	5-16	5-71
5.11.5	Mounting Method	5-16	5-71

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS (CONT)

SECTION	TITLE	INSTR PAGE	SRL PAGE
5.12	Design Characteristics (Directional Couplers)	5-17	5-72
5.12.1	Directional Type	5-17	5-72
5.12.2	Connectors	5-17	5-72
5.12.3	Transmission Line	5-18	5-72
5.12.4	Power Coupling	5-18	5-73
5.12.5	Power Rating	5-18	5-73
5.12.6	Isolation	5-18	5-73
5.12.7	Frequency Sensitivity	5-19	5-73
5.12.8	Tracking	5-19	5-73
5.12.9	Amplitude Equality	5-19	5-73
5.12.10	Phase Equality	5-19	5-74
5.12.11	Mounting Method	5-19	5-74
5.13	Design Characteristics (Switches)	5-20	5-74
5.13.1	Actuation	5-20	5-74
5.13.2	Switch Type	5-20	5-75
5.13.3	Coupling	5-21	5-75
5.13.4	Mounting Patterns	5-21	5-75
5.13.5	Return Mechanism Type	5-21	5-75
5.13.6	Interlock Circuitry	5-21	5-75
5.13.7	Receptacle Pressure	5-21	5-76
5.13.8	Holding Current	5-21	5-76

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS (CONT)

SECTION	TABLE	INSTR PAGE	SRL PAGE
5.14	Altitude	5-21	5-76
5.15	Attenuation (Fixed and Variable Attenuators)	5-22	5-77
5.16	Attenuation Range (Variable Attenuators)	5-23	5-79
5.17	Attenuation Stability (Fixed Attenuators)	5-24	5-80
5.18	Connector Wear Resistance (Fixed Attenuators)	5-25	5-81
5.19	Coupling Factor (Couplers)	5-25	5-81
5.20	Coupling Variation (Couplers)	5-25	5-82
5.21	Dial Calibration (Variable Attenuators)	5-26	5-83
5.22	Dielectric Withstanding Voltage (Reduced Barometric Pressure)	5-26	5-84
5.23	Dielectric Withstanding Voltage (Sea Level)	5-28	5-86
5.24	Effective Directivity (Couplers)	5-29	5-88
5.25	Endurance (Switches)	5-30	5-89
5.26	Frequency Sensitivity (Variable Attenuators)	5-30	5-90
5.27	Fungus	5-31	5-91
5.28	Gage (Adapters)	5-31	5-92
5.29	Heat Aging (Switches)	5-33	5-94
5.30	High Temperature	5-34	5-95

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS (CONT)

SECTION	TITLE	INSTR PAGE	SRL PAGE
5.31	Humidity	5-35	5-96
5.32	Insertion Loss	5-36	5-99
5.33	Insulation Resistance	5-37	5-100
5.34	Isolation (Switches)	5-38	5-102
5.35	Low Temperature	5-39	5-102
5.36	Moisture Resistance	5-40	5-104
5.37	Operating Voltage (Switches)	5-41	5-106
5.38	Peak Power (Fixed and Variable Attenuators)	5-42	5-107
5.39	Power Dissipation (Couplers)	5-43	5-108
5.40	Power Handling Capacity (Switches)	5-43	5-109
5.41	Radio Noise	5-44	5-110
5.42	Rain	5-45	5-111
5.43	Release Voltage (Switches)	5-46	5-113
5.44	Repeatability (Variable Attenuators)	5-47	5-114
5.45	Resetability Error (Variable Attenuators)	5-48	5-116
5.46	Salt Spray (Corrosion)	5-48	5-116
5.47	Sand and Dust	5-50	5-118
5.48	Seal	5-50	5-119
5.49	Sensitivity of Attenuation (Fixed Attenuators)	5-52	5-121
5.50	Shock (Variable Attenuators)	5-53	5-122

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS (CONT)

SECTION	TITLE	INSTR PAGE	SRL PAGE
5.51	Shock, Specified Pulse	5-53	5-123
5.52	Switching Time (Switches)	5-55	5-125
5.53	Temperature/Altitude	5-55	5-125
5.54	Temperature Coefficient	5-56	5-127
5.55	Thermal Shock	5-56	5-128
5.56	Vibration, High Frequency	5-58	5-130
5.57	Vibration, Low Frequency	5-60	5-132
5.58	Vibration, Random	5-62	5-135
5.59	Voltage Standing Have Ratio	5-63	5-137
SECTION 6	USE OF AEDPS	6-1	
SECTION 7	FIGURES	7-1	
7.1	Adapters	7-3	
7.2	Fixed Attenuators	7-7	
7.3	Variable Attenuators	7-15	
7.4	Directional Couplers	7-21	
7.5	Switches	7-29	
7.5.1	Switch Mounting Patterns	7-37	
SECTION 8	TABLES	8-1	
	Specification Requirements Sheet	8-5	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

PROPOSED
MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM (AEDPS) MICROWAVE/WAVEGUIDE COMPONENTS

SECTION 1

INTRODUCTION

1.1 scope

This dash numbered part of the Automated Engineering Document Preparation System, MIL-STD-35, covers detailed requirements of Microwave/waveguide Components (Fixed and Variable Attenuators, Waveguide to Coaxial Adapters, Directional Couplers, Waveguide and Coaxial Switches).

1.2 Purpose

The purpose of this dash numbered part of MIL-STD-35 is to provide a requester necessary information to properly prepare a request for a Microwave/Waveguide Components Military Specification, Exception (MSE).

1.3 Format

The requester will find it impossible to complete an SRS using only this dash numbered part of MIL-STD-35. Specification requirements which are standard for all generic families have been included in the master document at the issuance of MIL-STD-35C. These specification requirements are not repeated in each dash numbered part. The following list contains subjects which are pertinent to every family unless otherwise excepted.

General Description of AEDPS
Part Numbering
Specification Requirements Sheet
Writing Methodology
Mandatory Specification Requirements
General Specification Requirements
Dimensions and Drawings
Applicable Documents
Materials
Finishes
Inspections
Single and Multi-Item Specifications (Tabulation)
Sources
Search
General Instructions for SRL
Tables A through S

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.4 Military Specification, Exception Title Index

1.4.1 Title

The title of the generated MSE must be selected from one of the titles listed in the Military Specification Exception Title Index (see 1.4.2). If a suitable title is not found in the Military Specification Exception Title Index, a request should be forwarded to USAMICOM, ATTN: AMSMI-RCS, along with the desired title, and the related document. A code will be assigned and the code, title, and related document will be made a part of the Military Specification Exception Title Index. The requester will be notified of the code assigned.

One of the six-digit characteristic value codes listed in the CODE column of the Military Specification Exception Title Index, entered on a Specification Requirements Sheet (SRS) will specify that the title of the MSE will be the title showm with that code in the index. Each MSE title listed in the index is compatible with the document(s) listed with that title in the RELATED DOCUMENT column. The list may or may not be a complete listing.

The information contained in the RELATED DOCUMENT COVERAGE column is intended for the requester's reference; when more than one document is listed for a title, this information will be found useful in determining which of the documents is most suitable for use as the applicable General Specification.

The MSE title uses the basic federal item name listed in Cataloging Handbook H6. Titles with additional modifying and identifying words are provided to assist a designer in defining the scope of the MSE. To allow the designer flexibility, the title is generally not as restrictive as the basic specification to which the exception is taken. The reverse AEDPS title comprises the words that will appear in the Scope paragraph (1.1) of the MSE.

If the item selected from the AEDPS document becomes an item of supply, then the Cataloging Handbook H6 nomenclature must be used.

The MSE title may or may not be the same as the title used in DODISS, FIIG or the document to which the MSE document was written. Documents referenced in the MSE that will be listed in the Applicable Documents paragraph (2.1) of the MSE will be identified by the exact title that appears on the referenced document. The title written on the MSE or ir) DODISS or FIIG will not be entered in paragraph 2.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.4.2 Index

The Military Specification Exception Title Index is as follows:

CODE	TITLE	RELATED DOCUMENT	DOCUMENT COVERAGE
Ø91ØØ1	Attenuators, Fixed	MIL-A-3933	Coaxial and Waveguide
Ø91ØØ2	Attenuators, Variable	MIL-A-24215 MIL-A-38728	Coaxial and Waveguide Waveguide, Broadband
Ø91ØØ3	Attenuator Assemblies, Variable	MIL-A-46853	Types CN-575, CN-710, and CN-711
Ø91ØØ4	Switches, Waveguide	MIL-S-55041	Manual, Ejectromechanical, and Electromagnetic
Ø91ØØ5	Couplers, Directional	MIL-C-15370	Coaxial Line or Waveguide
Ø91ØØ6	Adapters, . Coaxial to Waveguide	MIL-A-22641	Coaxial Connectors, Coaxial Lines, and Waveguides

Source: https://assist.dla.mil -- Downloaded: 2026Ø-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 2

APPLICABLE DOCUMENTS

The following documents form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-A-3933	Attenuators, Fixed (Coaxial Line and Waveguide), General Specification for
MIL-T-5422	Testing, Environmental, Aircraft Electronic Equipment
MIL-C-15370	Couplers, Directional (Coaxial Line or Waveguide), General Specification for
MIL-A-22641	Adapters, Coaxial to Waveguide, General Specification for
MIL-A-24215	Attenuators, Variable (Coaxial and Waveguide), General Specification for
MIL-A-38728	Attenuators, Variable
MIL-A-46853	Attenuator Assemblies, Variable
MIL-S-55041	Switches, Waveguide

STANDARDS

MILITARY

MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-461	Electromagnetic Interference Characteristics Requirements for Equipment

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

MIL-STD-462	Electromagnetic Interference Characteristics, Measurement of
MIL-STD-810	Environmental Test Methods

OTHER PUBLICATIONS

H6	Federal Item Name Directory for Supply Cataloging

(Copies of Standards and Handbooks required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 3

DEFINITIONS

Definitions contained in MIL-STD-35 are applicable to Microwave/ Waveguide Components.

The following definitions are unique to Microwave/Waveguide Components:

Attenuation (Attenuators)

The ratio of power into a component to the power out undermatched conditions, and represents the actual power dissipated within the component.

Attenuation Range (Attenuators)

The limits of decrease of the amplitude ratio of a signal, between the input and output of the item.

Coupling (Coupler)

Ratio of main line input power to auxiliary line output power.

Coupling (Switches)

The number of positions or ports thru which RF energy may be transferred.

Directivity (Coupler)

Ratio of auxiliary line output power as a result of incident main line power, to the auxiliary line output power as a result of reflected main line power.

Fail-Safe (Switch)

The switch will return to its, original position when power is removed.

Insertion Loss (All Components)

Ratio of power delivered before insertion to the power delivered after the insertion of a device in a transmission line.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Isolation (Coupler)

Ratio of the power supplied to the main line to the power output at the isolated output.

Also equals the sum of the coupling and the directivity.

Isolation (Switch)

The power loss in db from the input terminal to an unselected output terminal.

Tracking (Coupler)

Maximum change in the difference between forward and reverse coupling over the band.

Voltage Standing Wave Ratio (VSWR) (All Components)

The ratio of the maxinnm amplitude of pressure (voltage) to the minimum amplitude of pressure (or voltage) measured along the path of the waves.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 4

GENERAL DESCRIPTION OF AEDPS

The general description of AEDPS contained in MIL-STD-35 is applicable to Microwave/Waveguide Components.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 5

DETAILED DESCRIPTION OF AEDPS

5.1 Introduction

The detailed description of AEDPS applicable to Microwave/Waveguide Components consists of the following:

a. The detailed description of AEDPS specified in MIL-STD-35.

b. The additional detailed description contained in this section,

5.2 Specification Requirement Sheet (SRS)

Each request for an MSE shall be submitted on an SRS. The preferred forms are the modified 80 column keypunch forms shown in MIL-STD-35 and at the end of this dash numbered part. It is expected that copies, as required, of the SRS form will be reproduced locally.

A detailed description of the SRS and its use, contained in MIL-STD-35, is applicable to Microave/Waveguide Components.

5.3 Specification Requirements

In addition to the mandatory specification requirements of MIL-STD-35, some of the specification requirements described herein are mandatory and shall be entered on the SRS of each request for an MSE. If one or more of these mandatory characteristics are omitted from a request, one or more important details will not be included in the MSE. For example, if Code 1590 and a value are not entered on the SRS, the upper limit of the required frequency range of the Microwave/Waveguide Components will not be specified on the MSE.

Mandatory specification requirements consist of all those listed in FIIL-STD-35 and the following:

CHARACTERISTIC NAME	CHARACTERISTIC CODE
Frequency Range (All Components)	1590
Power (Attenuators, Switches)	1595, 1596
Power (Couplers)	1655, 1656, 1657
Bidirectional Couplers	1648
Unidirectional Couplers	1649
Manual Actuation (Switches)	1675

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHACTERISTIC NAME (CONT)	CHARACTERISTIC CODE (CONT)
Motor Actuation (Switches)	1676
Solenoid Actuation (Switches)	1677
Coaxial End Coupling (Adapters)	1606, 1607
Coupling (Switches)	682-


5.4 General Specification Requirements

All general specifications requirements described in MIL-STD-35 are applicable to Microwave/Waveguide Components.

5.4.1 Code 1006 Requirements and Test Methods

Many requirements and test methods are shown on the SRL as "Requirements per 1006 document" or "Test per 1006 document" with an adjacent code for each. The adjacent code, entered on the SRS with an "X", will cause the MSE to state that the requirement or test method be in accordance with the document to which exception is being taken.

Similarly, many requirements and test methods are shown on the SRL as "Requirements per 1006 document except" or "Test per 1006 document except" with an adjacent code for each. This adjacent code, entered on the SRS with the exact words desired to complete the statement shown, will specify a complete statement. Only the words required to complete the statement after the "except" are entered on the SRS. (Example 1.)

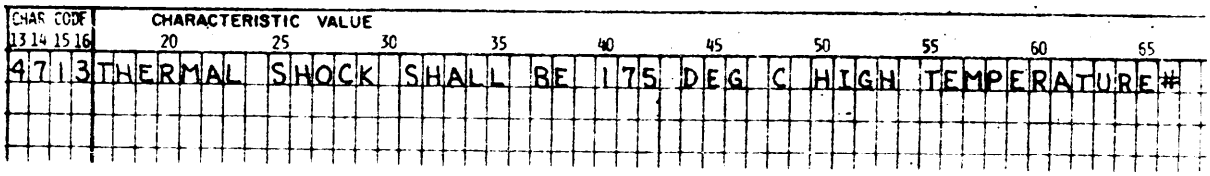

EXAMPLE 1

In Example 1, the code and entry will generate a paragraph as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

"GROUP A INSPECTION. GROUP A INSPECTION SHALL BE PERFORMED AS SPECIFIED IN THE SPECIFICATION REFERENCED IN 3.1 EXCEPT THERMAL SHOCKS HALL BE 175 DEG C HIGH TEMPERATURE."

The test method per 1006 code and requirements per 1006 code from the same test shall not be used together. This condition would indicate no exception is being specified. If a test method code(s) has been selected, it is mandatory that a requirement code be selected; and if a requirement code has been selected, it is mandatory that a test method code(s) be selected.

5.4.2 Approved Item Name Code

The approved item name code to be entered on the SRS with Code 1007 for a Microwave/Waveguide Component is selected from the following list:

APPROVED ITEM NAME	ITEM NAME CODE
Adapter	00186
Fixed Attenuator	14224
Variable Attenuator	00838
Attenuator Assembly	00350
Directional Coupler	00384
Switch	05118

Only the Item Name Code number is entered on the SRS with Code 1007.

5.5 Organization of Design and Test Data

Design data and operatinq Parameters for the four Microwave/Waveguide Component types are arranged such that design data and operating parameters common to ail four components are covered first fol lowed by design data and operating parameters specific to each in the order of Adapters, Attenuators, couplers, and Switches.

All tests are arranged in alphabetical order

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.6 Dimensions and Figures

All specification requirements for dimensions and figures described in MIL-STD-35 are applicable.

The figures applicable to Microwave/Waveguide Components are contained in Section 7. It is mandatory to enter on the SRS Code 1009 and a figure number.

5.7 Applicable Documents

The documents listed in the Applicable Document List of Section 5 of MIL-STD-35 and appropriate codes from Table B of MIL-STD-35 shall be entered on the SRS. In addition, the appropriate documents shown in the DOCUMENTS column below and applicable codes from Table B of MIL-STD-35 shall be entered on the SRS when the codes listed in the CODES column are used to specify tests or requirements. Shown parenthetically in the CODES column is a reference to the applicable test or requirement.

DOCUMENT	CODES
MIL-A-3933	1700 (Attenuation) 1728 (Attenuation Stability) 1738 (Connector Wear Resistance) 1893 (Peak Power) 1995 (Sensitivity of Attenuation) 2020 (Voltage Standing Wave Ratio) (VSWR)
MIL-T-5422	3111 (Temperature/Altitude)
MIL-C-15370	1747 (Coupling Factor) 1759 (Coupling Variation) 1782 (Effective Directivity) 1858 (Insertion Loss) 1913 (Power Dissipation) 2020 (VSWR)
MIL-A-22641	1815 (Gage) 1858 (Insertion Loss) 2020 (VSWR)
MIL-A-24215	1701 (Attenuation) 1769 (Dial Calibration 1806 (Frequency Sensitivity) 1858 (Insertion Loss) 1894 (Peak Power) 1957 (Repeatability) 2020 (VSWR)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

DOCUMENTS (CONT)	CODES (CONT)
MIL-A-38728	1468 (Low Frequency Vibration) 1719 (Attenuation Range) 1858 (Insertion Loss) 1978 (Resetability Error) 2020 (VSWR) 3202 (Shock)
MIL-A-46853	1702 (Attenuation) 1858 (Insertion Loss) 2020 (VSWR) 3022 (Altitude)
MIL-S-55041	1793 (Endurance) 1844 (Heat Aging) 1858 (Insertion Loss) 1872 (Isolation) 1884 (Operating Voltage) 1927 (Power Handling Capacity) . 1948 (Release Voltage) 1987 (Switching Time) 2020 (VSWR)
MIL-STD-202	1397 (Moisture Resistance) 1427 (Random Vibration) 1447 (High Frequency Vibration) 1467 (Low Frequency Vibration) 1500 (Specified Pulse Shock) 1511 (Insulation Resistance) 2009 (Temperature Coefficient) 4714 (Thermal Shock) 4771 (Sal t Spray) 4853 (Humidity) 4862 (DWV/Sea Level) 4960 (Sand and Dust) 6300 (DWV/Reduced Pressure)
MIL-STD-461 and 462	1938 (Radio Noise)
MIL-STD-810	3042 (High Temperature 3065 (Low Temperature 3088 (Rain) 4755 (Fungus)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DOCUMENTS (CONT)	CODES (CONT)
H6	Mandatory 1007
Documents to which exception is taken	1006

In addition, when the codes listed below are used to specify mounting or special preparations in accordance with a document, the document number must be entered again with the appropriate code from Table B of MIL-STD-35.

1378 Insulation resistance, preparation
3279 Dielectric withstanding voltage, reduced pressure, mounting
4584 Shock, specified pulse, mounting
4707 Vibration, high frequency, mounting
4719 Thermal shock, mounting
4729 Vibration, low frequency, mounting
4975 Vibration, random, mounting

For these codes any document from the Index, 1.4.2, may be used. To specify which test in the document contains applicable mounting or preparation requirements, enter on the SRS the test name and the document number (Example 2).

CHAR CODE 13 14 15 16	CHARACTERISTIC VALUE 20 25 30 35 40 45 50
1378	MIL-STD-202, INSULATION RESISTANCE #

EXAMPLE 2

Code 1378 in the above example specifies the special preparations for the Insulation Resistance test, which is not in MIL-A-22641, shall be in accordance with the special preparation for the Insulation Resistance test in MIL-STD-202.

5.8 Tabulation

All specification requirements for tabulation described in MIL-STD-25 are applicable.

Characteristics in this dash numbered part that are candidates for tabulation are contained in the following list. Only characteristic codes from this list shall be entered on the SRS with codes from the Specification Requirement Sheet Tabulation Table of MIL-STD-35.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABULATION CANDIDATES FOR MICROUAVE/WAVEGUIDE COMPONENTS

CHARACTERISTICS	CODES
All Components	
Waveguide Type	1566 or 1567
Flange Type	1569, 1570
Weight	1585 or 1586 or 1587
Frequency Range	1588 or 1590
Adapters	
Voltage Standing Wave Ratio (VSWR)	2031, 3151, 3152
Attenuators	
Average Power	1595
Peak Power	1596
Attenuation	1641, 1709, 1710
Attenuation Range	1722, 1723
Attenuation Variation	1809
VSWR	2027, 2028, 2029, 2030, 3150
Couplers	
Primary Power	1655, 1656
Secondary Power	1657
Isolation	1658
Amplitude Equality	1661
Phase Equality	1662 or 1663
Coupling Factor	1752, 1753
Coupling Variation	1764
Effective Directivity	1788
Insertion Loss	1866
VSWR	3153, 3154, 3155
Switches	
Average Power	1596
Peak Power	1596
Coupling	1682
insertion Loss	1866
Isolation	1879
VSWR	3156

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

5.9 Design Characteristics (All Components)

5.9.1 Frequency Range

There are three codes applicable to the frequency range of the components. One of these codes (1590) is mandatory. These codes and information concerning them are as follows:

Code 1588 and a value, entered on the SRS, will specify the lower limit of frequency in gigahertz.

Code 1589 and an "X", entered on the SRS, will specify that the lower limit of frequency shall be direct current.

Code 1590 and a value, entered on the SRS, will specify the upper limit of frequency in gigahertz. It is mandatory that Code 1590, with the upper frequency limit, be entered on the SRS whenever Code 1588 or Code 1589 is entered.

5.9.2 Power (Attenuators and Switches)

There are three codes applicable to the power rating of the Attenuators and Switches. Two of these codes (1595 and 1596) are mandatory. Information concerning them is as follows:

Code 1595 amd a val ue, entered on the SRS, will specify the average power rating in watts.

Code 1596 and a val ue, entered on the SRS, will specify the peak power rating in kilowatts.

Code 1597 and a value, entered on the SRS, will specify the peak voltage st average power.

5.9.3 Temperature Range

There are four codes applicable to the temperature range of the components. None of these codes are mandatory. Information concerning them is as follows:

Code 5068 and a values entered on the SRS, will specify the minimum operating temperature in degrees Celsius.

Code 5069 and a value, entered on the SRS, will specify the maximum operating temperature in degrees Celsius.

Code 5070 and a value, entered on the SRS, will specfiy the maximum nonoperating temperature in degress Celsius

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 5071 and a value, entered on the SRS, will specify the maximum nonoperating temperature in degrees Celsius.

5.9.4 Impedance

There are two codes applicable to the impedance rating of the components. Neither of these codes is mandatory. These codes and information concerning them are as follows:

Code 1593 and a value, entered on the SRS, will specify the input impedance in ohms.

Code 1594 and a value, entered on the SRS, will specify the output impedance in ohms.


5.9.5 Voltage Standing Wave Ratio (VSNR)

The codes in Table III, located in the Appendix, are to be used to specify variable attenuator db settings for specified frequencies. None of the codes are mandatory. Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective table cell(s).

The codes in the first column are to be used to specify the maximum VSWR value allowed for various attenuator db settings at different frequencies.

The codes in the second column are to be used to specify the test frequency in megacycles.

The codes in the third through seventh columns are to be used to specify the db settings of the attenuator controls at specified frequencies. The V5WR shall be measured at the specified db settings.

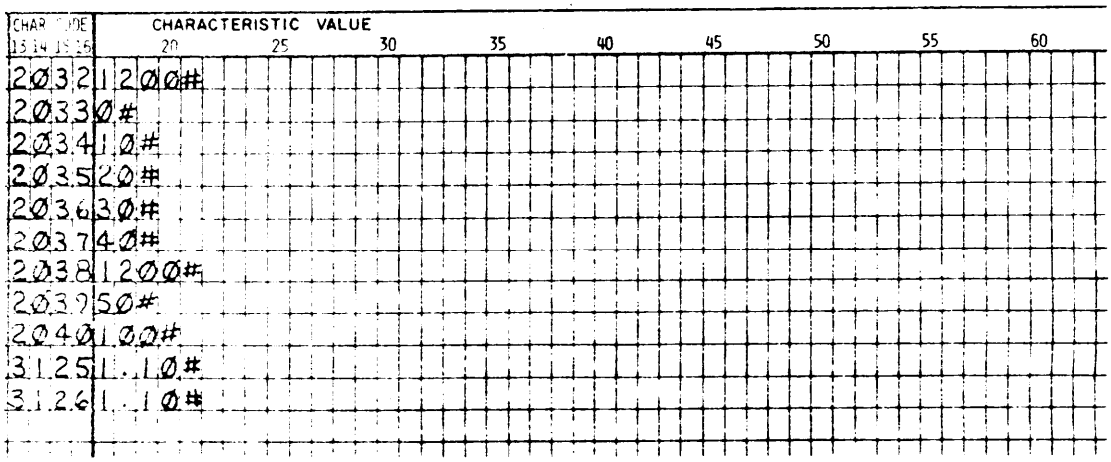

EXAMPLE 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 2032 in Example 3 specifies that the test frequency shall be 1200 megacycles.

Codes 2033 thru 2037 specify the db settings at the test frequency of 1200 megacycles.

Code 2038 specifies that the test frequency shall remain at 1200 megacycles.

Codes 2039 and 2040 specify the db settings at the test frequency of 1200 megacycles.

Codes 3125 and 3226 specify that the VSWR for each db setting measured at 1200 megacycles shall not exceed 1.10.

5.9.6 Classification

There are two codes applicable to the specified classification of the components. Neither of these codes is mandatory. These codes and information concerning them are as follows:

Code 1562 will specify the class of the components in Roman or Arabic numerals. Code 1562 shall not be used with Code 1563.

Code 1563 will specify the type of component in Roman numerals. Code 1563 shall not be used with Code 1562.

CHARACTERISTIC NAME	CHAR CODE 13 14 15 16	CHARACTERISTIC VALUE 20 25 30 35
	1562	III#

EXAMPLE 4

in Example 4, Code 1562 specifies that the classification of the component is Class III.

5.9.7 Waveguide

The type and size of the waveguide that is integral with the component design may be specified by six codes. These codes and information concerning them are as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1564 and a value, entered on the SRS, will specify the height of the waveguide in inches.

Code 1565 and a value, entered on the SRS, will specify the width of the waveguide in inches.

Code 1591 and an "X", entered on the SRS, will specify that the dimensions are inside the cross section.

Code 1592 and an "X", entered on the SRS, will specify that the dimensions are outside the cross section. It is mandatory that either Code 1591 or Code 1592 be entered on the SRS.

Code 1566 provides for specifying the equivalent type RG-Number of the waveguide. Code 1566 shall not be used with Code 1567.

Code 1567 provides for specifying the equivalent type WR-Number of the waveguide. Code 1567 shall not be used with Code 1566.

5.9.8 Flanges

The type of flanges that are integral with the component waveguide may be specified by ten codes. None of these codes are mandatory. These codes and information concerning them are as follows:

Code 1569 provides for specifying the input flange UG-type number. Code 1569 shall not be used with Code 1570.

Code 1570 provides for specifying the output flange UG-type number.

Code 1568 and a document designation, entered on the SRS, will specify the flange mating characteristics specification.

There are three additional codes that provide for specifying the type of flange. None of these codes are mandatory. Only one code may be selected. These codes and information concerning them are as follows:

Code 1571 and an "X", entered on the SRS, will specify that the flange is a choke type.

Code 1572 and an "X", entered on the SRS, will specify that the flange is a cover type.

Code 1573 and an "X", entered on the SRS, will specify that the flange is a contact type.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

The flange connection methods are specified by three codes which are not mandatory. Only one code may be selected. These codes and information concerning them are as follows:

Code 1574 and an "X", entered on the SRS, will specify that the flange shall be connected by clamp rings.

Code 1575 and an "X", entered on the SRS, will specify that the flanges shall be connected by studs.

Code 1576 and an "X", entered on the SRS, will specify that the flanges shall be connected with threaded holes.

Code 1577 and a number, entered on the SRS, will specify the quantity of flange connection devices.

5.9.9 Connectors

There are four codes applicable to the coaxial connector type and specification numbers. None of these codes are mandatory. These codes and information concerning them are as follows:

Code 1578 provides for specifying the input connector type number.

Code 1579 and a document designation, entered on the SRS, will specify that the design and construction requirements for the connectors shall be in accordance with the document.

Code 1580 provides for specifying the output connector type number.

Code 1581 and a document designation, entered on the SRS, will specify that the design and construction requirements for the connectors shall be in accordance with the document.

5.9.10 Weight

There are three codes applicable to the weight of the components. None of these codes are mandatory. Only one code may be selected. These codes and information concerning them are as follows:

Code 1585 and a value, entered on the SRS, will specify the maximum weight of the component in ounces.

Code 1586 and a value, entered on the SRS, will specify the maximum weight of the component in pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1587 and a value, entered on the SRS, will specify the maximum weight of the component in grams.

5.10 Design Characteristics (Adapters)

5.10.1 Coaxial End Coupling

There are two codes applicable to the coaxial end couplings of the adapter which are equivalent to standard couplings with a UG-part designation. These codes are mandatory. Information concerning them is as follows:

Code 1606 will specify that the coupling equivalent UG-part designation shall be the number entered with it on the SRS.

Code 1607 will specify that the UG-part designation of the mating coupling shall be the number entered with it on the SRS.

5.11 Design Characteristics (Attenuators)

5.11.1 Eliminate Backlash

Code 1631 and an "X", entered on the SRS, will specify that the variable control mechanism shall have provisions to eliminate backlash. Code 1631 is not mandatory.

5.11.2 Dial Readout

The codes in Table I (Section B) are to be used to specify the direct reading scale calibrated in db increments for various db ranges. None of the codes in Table I are mandatory. Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective table cells. Only lines from which codes have been selected will appear in the MSE.

The two codes on each line of Table I are to be used to specify the scale increment (maximum db) in the first column for a particular db range in the second column (Example 5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC NAME	CHAR CODE 13 14 15 16	CHARACTERISTIC VALUE 20 25 30 35
	1614	Ø.Ø5#
	1615	Ø TO 1#
	1616	Ø.1#
	1617	1 TO 10#
	1618	Ø.2#
	1619	10 TO 20#
	1620	Ø.5#
	1621	20 TO 30#

EXAMPLE 5

The codes and values entered on the SRS in Example 5 specify the following:

Code 1614 specifies that the scale increment shall be 0.05 db maximum.

Code 1615 specifies that the calibration range shall be zero to one db for the 0.05 db increment.

Code 1616 specifies that the scale increment shall be 0.1 db maximum.

Code 1617 specifies that the calibration range shall be one to ten db for the 0.1 db increment.

Code 1618 specifies that the scale increment shall be 0.2 db maximum.

Code 1619 specifies that the calibration range shall be ten to twenty db for the 0.2 db increment.

Code 1620 specifies that the scale increment shall be 0.5 db maximum.

Code 1621 specifies that the calibration range shall be twenty to thirty db for the 0.5 db increment.

5.11.3 Attenuation

The codes in Table II (Section 8) are to be used to specify attenuation accuracy for various attenuation ranges, tested according to certain specified methods, for various rated attenuation values of fixed attenuators. None of the codes in Table II are mandatory. Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective table cell(s).


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The codes in the first two columns are to be used to specify the attenuation db values of a fixed attenuator. There are two categories of attenuation value. The first category includes values up to a certain db level for a specified test method. The second category includes values over that db level and higher for a specified test method.

The codes in the third column are to be used to specify the test method to determine the attenuation accuracy. An example of a test method is Dual-Channel Audio Substitution.

The codes in the third and fourth columns are to be used to specify the attenuation range within which the attenuation accuracy is measured.

The codes in the fifth column are to be used to specify the accuracy of attenuation that is to be measured within a specified attenuation range, using a specified test method, for a fixed attenuator with a specified attenuation value.

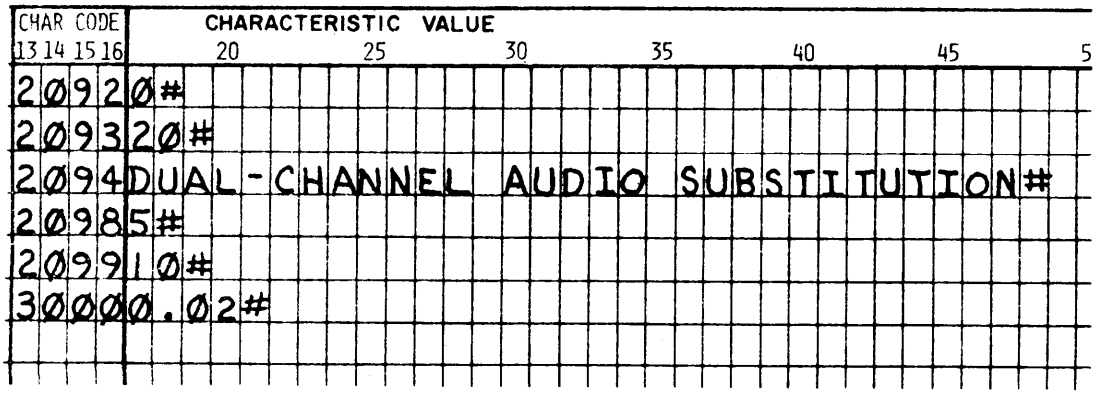

EXAMPLE 6

The codes and values entered on the SRS in Example 6 specify the following:

Code 2092 specifies that the minimum attenuation in the first category of attenuation value shall be zero db.

Code 2093 specifies that the maximum attenuation in the first category of attenuation value shall be 20 db.

Code 2094 specifies that the attenuator shall be tested by the dual-channel audio substitution method.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 2098 specifies that the lower end of the attenuation range during attenuation accuracy measurement shall be five db minimum.

Code 2099 specifies that the attenuation range maximum shall be ten db.

Code 3000 specifies that the accuracy of attenuation, measured by the dual-channel audio substitution method within the attenuation range of five to ten db, shall be 0.02 db.

5.11.4 Phase Shift

There are five codes applicable to the maximum allowable phase shift at various attenuation settings. These codes and information concerning them are as follows:

Code 1626 and a value, entered on the SRS, will specify the maximum phase shift in degrees at lower attenuation settings. Code 1626 is mandatory if Code 1627 is specified.

Code 1627 and a value, entered on the SRS, will specify the maximum attenuation setting in db for the measured phase shift.

Code 1628 and a value, entered on the SRS, will specify the maximum phase shift in degrees at higher attenuation settings. Code 1628 is mandatory if Codes 1629 and 1630 are specified.

Codes 1629 and 1630 and values, entered on the SRS, will specify the higher attenuation settings in db for the measured phase shift. Code 1629 specifies the lower value of the db range.

5.11.5 Mounting Method

There are nine codes applicable to the method of mounting the attenuators. Only one mounting method may be selected. None of these codes are mandatory. These codes and information concerning them are as follows:

Code 1632 and an "X", entered on the SRS, will specify that the attenuators shall be mounted with brackets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Any one of the remaining eight codes entered on the SRS with an "X" will specify the following methods of mounting:

Code 1633	Clamp
Code 1634	Connector (coaxial)
Code 1635	Flange w/mounting holes
Code 1636	Free standing base
Code 1637	Rack
Code 1638	Threaded holes
Code 1639	Unthreaded holes
Code 1640	Threaded stud

5.12 Design Characteristics (Directional Couplers)

5.12.1 Directional Type

There are two codes applicable to the type of Coupler. It is mandatory that one and only one of the two codes be selected. These codes and information concerning them are as follows:

Code 1648 and an "X", entered on the SRS, will specify that the energy propagation in the primary line of the Coupler is in each of two directions or bidirectional. Code 1648 shall not be used with Code 1649.

Code 1649 and an "X", entered on the SRS, will specify that the energy propagation in the primary line of the Coupler is in one direction only or unidirectional.

5.12.2 Connectors

There are two codes applicable to the secondary or auxiliary line connector type and specification numbers. Neither of the codes is mandatory. These codes and information concerning them are as follows:

Code 1672 and a value, entered on the SRS, will specify the secondary line coaxial connector type number,

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1673 and a document designation, entered on the SRS, will specify the design and construction requirements document.

5.12.3 Transmission Line

Code 1650 and an RG-part number, entered on the SRS, will specify the equivalent transmission line.

5.12.4 Power Coupling

There are three codes applicable to the power coupling. None of these codes are mandatory. These codes and information concerning them are as follows:

Code 1651 and a value, entered on the SRS, will specify the maximum transmitted power coupling in db.

Code 1652 and a value, entered on the SRS, will specify the maximum power cross-coupling in db.

Code 1653 and a value, entered on the SRS, will specify the maximum reflected power in db.

5.12.5 Power Rating

There are three codes applicable to the power rating of the Coupler. The three codes are mandatory. These codes and information concerning them are as follows:

Code 1655 and a value, entered on the SRS, will specify the average power rating in watts in the primary guide.

Code 1656 and a value, entered on the SRS, will specify the peak power rating in kilowatts in the primary guide.

Cock 1657 and a value, entered on the SRS, will specify the average reflected power in watts in the secondary guide.

5.12.6 Isolation

Code 1658 and a value, entered on the SRS, will specify the sum in minimum db of the coupling and directivity. This code is not mandatory.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.12.7 Frequency Sensitivity

Code 1659 and a value, entered on the SRS, will specify frequency sensitivity in plus or minus db minimum.

5.12.8 Tracking

Code 1660 and a value, entered on the SRS, will specify in db the maximum change in the difference between forward and reverse coupling over the frequency band.

5.12.9 Amplitude Equality

Code 1661 and a value, entered on the SRS, will specify the output to output amplitude equality in plus or minus db between the two Coupler outputs.

5.12.10 Phase Equality

Code 1662 and a value, entered on the SRS, will specify the output to output phase equality between the two Coupler outputs in plus or minus db. This code is not mandatory.

Code 1663 and a value, entered on the SRS, will specify the output to output phase equality between the two Coupler outputs in Plus or minus radians: This-code is not mandatory.

5.12.11 Mounting Method

There are eight codes applicable to the method of mounting the Couplers. None of these codes are mandatory. Only one code may be selected. These codes and information concerning them are as follows:

Code 1664 and an "X", entered on the SRS, will specify that the Coupler shall be mounted with any acceptable method.

Any one of the remaining seven codes entered on the SRS with an "X" will specify the following methods of mounting:

Code 1665	Bolts
Code 1666	Brackets
Code 1667	Clamps
Code 1668	Clips

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1669	Connectors
Code 1670	Screws
Code 1671	Studs

5.13 Design Characteristics (Switches)

5.13.1 Actuation

There are three codes applicable to the method of actuating the switch. It is mandatory that one and only one of these codes be selected. These codes and information concerning them are as follows:

Code 1675 and an "X", entered on the SRS, will specify that the switch shall be manually actuated.

Code 1676 and an "X", entered on the SRS, will specify that the switch shall be actuated by a motor.

Code 1677 and an "X", entered on the SRS, will specify the the switch shall be actuated by a solenoid.

5.13.2 Switch Type

There are four codes applicable to the type of switch. These codes are mandatory if a transfer type or a nontransfer type is selected. Information concerning these codes is as follows:

Code 1678 and a value, entered on the SRS, will specify the number of poles of a transfer type switch.

Code 1679 and a value, entered on the SRS, will specify the number of throws of the transfer type switch.

Code 1680 and a value, entered on the SRS, will specify the number Of poles of a nontransfer type switch.

Code 1681 and a value, entered on the SRS, will specify the number of throws of the nontransfer type switch.

Codes 1678 and 1679 shall not be used with Codes 1680 and 1681.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.13.3 Coupling

Code 1682 and a value, entered on the SRS, will specify the number of switch positions. This code is mandatory.

5.13.4 Mounting Patterns

Code 1684 and a number selected from figure number Ø91-Ø5-13 through Ø91-Ø5-29, entered on the SRS, will specify the Pattern for mounting the switch. If Code 1684 is entered, the figure number for the mounting pattern must also be entered with Code 1009 after the switch body style figure number.

Code 1685 and an "X", entered on the SRS, will specify that inserts shall be required for tapped hole mounting of switches.

5.3.5 Return Mechanism Type

There are two codes applicable to the type of return mechanism in the switch, These two codes are not mandatory. Only one code may be selected. Information concerning these codes is as follows:

Code 1687 and an "X", entered on the SRS, will specify that the type of switch return mechanism shall be fail-safe.

Code 1688 and an "X", entered on the SRS, will specify that the switch return mechanism shall be the latching type.

5.13.6 Interlock Circuitry

Code 1689 and an "X", entered on the SRS, will specify that the switch design shall include interlock circuitry. This code is not mandatory.

5.13.7 Receptacle Pressure

Code 1690 and an "X", entered on the SRS, will specify that the switch receptacle shall be pressurized. This code is not mandatory.

5.13.8 holding Current

Code 1691 and a value, entered on the SRS, will specify the maximum holding current in amperes. This code is not mandatory.

5.14 Altitude

Code 3020 is the 1006 test code (5.4).

Code 3021 is the 1006 except test code (5.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 3022 and an "X", entered on the SRS, will specify to test in accordance with MIL-A-46853.

Code 3023 and a value, entered on the SRS, will specify the reduced test pressure equivalent altitude in feet.

Code 3024 and a value, entered on the SRS, will specify the reduced test pressure equivalent altitude in metres.

Code 3025 and a value, entered on the SRS, will specify the duration of reduces pressure exposure in minutes.

Code 3027 is the 1006 requirements code (5,4).

Code 3028 is the 1006 except requirements code (5.4).

Code 3029 and an "X", entered on the SRS, will specify that the component shall be capable of operating with no degradation of performance at the reduced barometric pressures and upon return to ambient conditions.

Code 3031 and a value, entered on the SRS, will specify the maximum attenuation in db.

Code 3032 and a value, entered on the SRS, will specify the maximum insertion loss in db.

Code 3033 and a number, entered on the SRS, will specify the maximum VSWR.

5.15 Attenuation (Fixed and Variable Attenuators)

Code 1698 is the 1006 test code (5.4).

Code 1699 is the 1006 except test code (5.4).

Code 1700 and an "X", entered on the SRS, will specify to test in accordance with MIL-A-3933.

Code 1701 and and "X", entered on the SRS, will specify to test in accordance with MIL-A-24215.

Code 1702 and an "X", entered on the SRS, will specify to test in accordanace with MIL-A-46853.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1703 and an "X", entered on the SRS, will specify that the attenuation shall be measured at minimum, 50 percent, and maximum attenuation.

Code 1704 and a value, entered on the SRS, will specify the attenuation value in db for test pad number one.

Code 1705 and a value, entered on the SRS, will specify the attenuation value in db for test pad number two.

Code 1706 and a value, entered on the SRS, will specify the impedance value of the test cables in ohms.

Code 1707 is the 1006 requirements code (5.4).

Code 1708 is the 1006 except requirements code (5.4).

Code 1709 and a value, entered on the SRS, will specify the maximum measured attenuation in db.

Code 1710 and a value, entered on the SRS, will specify the minimum measured attenuation in db.

Code 1711 and a value, entered on the SRS, will specify the minimum test band frequency in gigahertz.

Code 1712 and a value, entered on the SRS, will specify the maximum test band frequency in gigahertz. If Code 1711 is used, it is mandatory that Code 1712 be used.

Code 1713 and a value, entered on the SRS, will specify the accuracy of attenuation as plus or minus db/db over the reference db level plus insertion loss.

Code 1714 and a value, entered on the SRS, will specify the db level used as reference during measurement of the attenuation accuracy. If Code 1713 is used, it is mandatory that Code 1714 be used.

Code 1715 and a value, entered on the SRS, will specify the accuracy of attenuation as plus or minus db. Code 1715 shall not be used with Codes 1713 and 1714.

5.16 Attenuation Range (Variable Attenuators)

Code 1717 is the 1006 test code (5.4).

Code 1718 is the 1006 except test code (5.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1719 and an "X", entered on the SRS, will specify to test in accordance with MIL-A-38728.

Code 1720 is the 1006 requirements code (5.4).

Code 1721 is the 1006 except requirements code (5.4).

Codes 1722 and 1723 and values, entered on the SRS, will specify the attenuation range in db above insertion loss.

5.17 Attenuation Stability (Fixed Attenuators)

Code 1726 is the 1006 test code (5.4).

Code 1727 is the 1006 except test code (5.4).

Code 1728 and an "X", entered on the SRS, will specify to test in accordance with MIL-A-3933.

There are six codes applicable to the type of tests that may be performed in order to determine the stability of attenuation. These codes and information concerning them are as follows:

Code 3140 and an "X", entered on the SRS, will specify that the Moisture Resistance test shall be performed.

Any one of the remaining five codes entered on the SRS with an "X" will specify the following tests:

Code 3141	Peak Power
Code 3142	Shock, Specified Impulse
Code 3143	Temperature Change
Code 3144	Thermal Shock
Code 3145	Vibration, Low Frequency

Code 1730 is the 1006 requirements cede (5.4).

Code 1731 is the 1006 except requirements code (5.4).

Code 1732 and an "X", entered on the SRS, will specify that there shall be no evidence of mechanical damage.

Code 1733 and a value, entered on the SRS, will specify the maximum db change in attenuation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.18 Connector Wear Resistance (Fixed Attenuators)

Code 1736 is the 1006 test code (5.4).

Code 1737 is the 1006 except test code (5.4).

Code 1738 and an "X", entered on the SRS, will specify to test in accordance with MIL-A-3933.

Code 1739 and a value, entered on the SRS, will specify the number of cycles of connection and disconnection.

Code 1740 is the 1006 requirements code (5.4).

Code 1741 is the 1006 except requirements code (5.4).

Code 1742 and an "X", entered on the SRS, will specify that there shall be no evidence of excessive removal of material or lubrication during or after cycling.

5.19 Coupling Factor (Couplers)

Code 1745 is the 1006 test code (5.4).

Code 1746 is the 1006 except test code (5.4).

Code 1747 and an "X", entered on the SRS, will specify to test in accordance with MIL-C-15370.

Codes 1748 and 1749 and values, entered on the SRS, will specify the frequency range in gigahertz for the determination of the coupling factor at mid-frequency of this range.

Code 1750 is the 1006 requirements code (5.4).

Code 1751 is the 1006 except requirements code (5.4).

Codes 1752 and 1753 and values, entered on the SRS, will specify the coupling factor and the tolerance limit respectively in db. If Code 1752 is used, it is mandatory that Code 1753 be used.

5.20 Coupling Variation (Couplers)

Code 1757 is the 1006 test code (5.4).

Code 1758 is the 1006 except test code (5.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1759 and an "X", entered on the SRS, will specify to test in accordance with MIL-C-15370.

Codes 1760 and 1761 and values, entered on the SRS, will specify the frequency range in gigahertz for the determination of coupling variation.

Code 1762 is the 1006 requirements code (5.4).

Code 1763 is the 1006 except requirements code (5.4).

Code 1764 and a value, entered on the SRS, will specify the variation in coupling in maximum db.

5.21 Dial Calibration (Variable Attenuators)

Code 1767 is the 1006 test code (5.4).

Code 1768 is the 1006 except test code (5.4).

Code 1769 and an "X", entered on the SRS, will specify to test in accordance with MIL-A-24215.

Codes 1770 and 1771 are mandatory.

Code 1770 and a value, entered on the SRS, will specify the frequency in gigahertz at which the dial calibration check shall take place.

Code 1771 and a value, entered on the SRS, will specify the maximum attenuation in db for the dial calibration check.

Code 1772 is the 1006 requirements code (5.4).

Code 1773 is the 1006 except requirements code (5.4).

Code 1774 and a value, entered on the SRS, will specify the dial accuracy in plus or minus db.

Code 1775 and a value, entered on the SRS, will specify the dial accuracy in plus or minus percent.

Codes 1774 and 1775 shall not be used together.

5.22 Dielectric Wiithstanding tage (Reduced Barometric ?rs~sure~

Code 4883 is the 1006 test code (5.4).

Code 4884 is the 1006 except test code (5.4).

Code 6300 and an "X", entered on the SRS, will specify to test in accordance with Method 301 of MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 4886 and a letter, entered on the SRS, will specify the applicable test condition letter from Method 105 of MIL-STD-202. Code 4886 is mandatory.

Code 3277 and an "X", entered on the SRS, will specify that the specimen shall be mounted by any suitable method.

Code 3278 and an "X", entered on the SRS, will specify that the specimen shall be mounted by the normal method.

Code 6280 and a document designation, entered on the SRS, will specify the mounting method in accordance with the document (5.7).

Code 3280 and an "X", entered on the SRS, will specify that the test voltage shall be raised from zero to the required value instantaneously.

Code 3281 and a value, entered on the SRS, will specify the rate in volts per second to raise the test voltage from zero to the required value.

Code 4885 and a value, entered on the SRS, will specify the test voltage in volts dc.

Code 4849 and a value, entered on the SRS, will specify the test voltage in volts ac.

Code 4891 and a value, entered on the SRS, will specify the duration of test voltage application in seconds.

Code 6292 and an "X", entered on the SRS, will specify that the points of test voltage application shall be between mutually insulated parts.

Code 6293 and an "X", entered on the SRS, will specify that the points of test voltage application shall be between all insulated parts and ground.

Code 6294 and an "X", entered on the SRS, will specify that the points of test voltage application shall be between current carrying parts and case.

Code 4827 and a document designation, entered on the SRS, will specify the method of test voltage connection in accordance with the document (5.7).

Code 6310 and a value, entered on the SRS, will specify the maximum surge current in milliamperes.

Code 4907 is the 1006 requirements code (5.4).

Code 4908 is the 1006 except retirements code (5.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 4906 and an "X", entered on the SRS, will specify that there shall be no evidence of flashover, mechanical damage, arcing, or insulation breakdown.

Code 4894 and a value, entered on the SRS, will specify the maximum leakage current in milliamperes.

Code 4896 and a value, entered on the SRS, will specify the maximum leakage current in microampere.

Code 4901 and an "X", entered on the SRS, will specify that the component shall remain within tolerance.

Code 4902 and an "X", entered on the SRS, will specify that there shall be no degradation of component performance.

5.23 Dielectric Withstanding Voltage (Sea Level)

Code 4860 is the 1006 test code (5.4).

Code 4861 is the 1006 except test. code (5.4).

Code 4862 and an "X", entered on the SRS, will specify to test in accordance with Method 301 of MIL-STD-202.

Code 4854 and a value, entered on the SRS, will specify the test voltage in volts dc.

Code 4855 and a value, entered on the SRS, will specify the test voltage in volts ac.

Code 4867 and a value, entered on the SRS, will specify the duration of application of test voltage in seconds.

Code 3275 and an "X", entered on the SRS, will specify that the test voltage shall be raised from zero to the required value instantaneously.

Code 3276 and a value, entered on the SRS, will specify the rate in volts per second that the test voltage is to be raised from zero to the required value.

Code 4844 and an "X", entered on the SRS, will specify that the points of the test voltage application shall be between mutually insulated parts.

Code 4845 and an "X", entered on the SRS, will specify that the points of test voltage application shall be between all insulated parts and ground.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 4846 and an "X", entered on the SRS, will specify that the points of test voltage application shall be between current carrying parts and case.

Code 6267 and a document designation, entered on the SRS, will specify the method of test voltage connection in accordance with the document (5.7).

Code 4897 and a value, entered on the SRS, will specify the maximum surge current in milliamperes.

Code 4873 is the 1006 requirements code (5.4).

Code 4874 is the 1006 except requirements code (5.4).

Code 4856 and an "X", entered on the SRS, will specify that there shall be no arcing, flashover, breakdown of insulation, or evidence of damage.

Code 4875 and a value, entered on the SRS, will specify the maximum leakage current in milliamperes.

Code 4817 and a value, entered on the SRS, will specify the maximum leakage current in microamperes.

Code 4847 and an "X", entered on the SRS, will specify that the component shall remain within tolerance.

Code 4826 and an "X", entered on the SRS, will specify that there shall be no degradation of performance of the component.

5.24 Effective Directivity (Couplers)

Code 1780 is the 1006 test code (5.4).

Code 1781 is the 1006 except test code (5.4).

Code 1782 and an "X", entered on the SRS, will specify to test in accordance with MIL-C-15370.

Codes 1783 and 1784 and values, entered on the SRS, will specify the test frequency range in gigahertz. Code 1783 will specify the lower extreme of the range; Code 1784 will specify the upper extreme.

Code 1785 and an "X", entered on the SRS, will specify that the alternate test shall be conducted. The alternate test uses a short circuit displaced through one-half a wavelength in the primary line.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1786 is the 1006 requirements code (5.4).

Code 1787 is the 1006 except requirements code (5.4).

Code 1788 and a value, entered on the SRS, will specify the minimum effective directivity in db.

5.25 Endurance (Switches)

Code 1791 is the 1006 test code (5.4).

Code 1792 is the 1006 except test code (5.4).

Code 1793 and an "X", entered on the SRS, will specify to test in accordance with MIL-S-55041.

Code 1794 and a value, entered on the SRS, will specify the number of coupling cycles.

Code 1795 and a value, entered on the SRS, will specify the maximum cycling rate. Codes 1794 and 1795 are mandatory.

Code 1796 and an "X", entered on the SRS, will specify that the VSWR shall be measured after cycling.

Code 1757 and an "X", entered on the SRS, will specify that Insertion Loss shall be measured after cycling.

Code 1798 is the 1006 requirements code (5.4).

Code 1799 is the 1006 except requirements code (5.4).

Code 1800 and a number, entered on the SRS, will specify the maximum VSWR .

Code 1801 and a value, entered on the SRS, will specify the maximum Insertion Loss in db.

5.26 Frequency Sensitivity (Variable Attenuators)

Code 1804 is the 1006 test code (5.4).

Code 1805 is the 1006 except test code (5.4).

Code 1806 and an "X", entered on the SRS, will specify to test in accordance with MIL-A-24215.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1807 is the 1006 requirements code (5.4).

Code 1808 is the 1006 except requirements code (5.4).

Code 1809 and a value, entered on the SRS, will specify the total variation in attenuation value across the operating frequency range in maximum db.

5.27 Fungus

Code 4753 is the 1006 test code (5.4).

Code 4754 is the 1006 except test code (5.4).

Code 4755 and an "X", entered on the SRS, will specify to test in accordance with Method 508 of MIL-STD-810.

Code 4763 and an "X", entered on the SRS, will specify that the component shall be operated during exposure.

Code 4757 and an "X", entered *on* the SRS, will specify that the specimen shall be operated after exposure.

Code 4756 and a value, entered on the SRS, will specify the duration of test in days (if other than 28 days).

Code 4759 is the 1006 requirements code (5.4).

Code 4760 is the 1006 except requirements code (5.4).

Code 4761 and an "X", entered on the SRS, will specify that the Supplier's Certification of Compliance may be accepted in lieu of testing.

Code 4762 and an "X", entered on the SRS, will specify that the component shall show no evidence of fungus.

5.28 Gage (Adapters)

Code 1813 is the 1006 test code (5.4).

Code 1814 is the 1006 except test code (5.4).

Code 1815 and an "X", entered on the SRS, will specify to test in accordance with MIL-A-22641.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1816 and a value, entered on the SRS, will specify the number of mating cycles of coaxial fittings for Classes 2 or 3 Adapters. Code 1816 is mandatory.

If Code 1817 is entered on the SRS, the generated document will contain the following words: "AFTER THE CLASS 1, 4, OR 5 ADAPTER IS RIGIDLY MOUNTED IN A SUITABLE JIG OR FIXTURE, THE APPLICABLE MATING CHARACTERISTICS SHALL BE MEASURED TO ASSURE COMPLIANCE WITH THE VALUES INDICATED."

Code 1818 and a value, entered on the SRS, will specify the oversize test pin diameter in thousandths of an inch.

Code 1819 and a value, entered on the SRS, will specify the oversize test pin diameter plus tolerance in ten thousandths of an inch.

Code 1820 and a value, entered on the SRS, will specify the minimum insertion depth of the test pin in thousandths of an inch.

Code 1821 and a value, entered on the SRS, will specify the number of test pin insertions.

Code 1822 and a value, entered on the SRS, will specify the maximum test pin diameter in thousandths of an inch.

Code 1823 and a value, entered on the SRS, will specify the maximum test pin diameter plus to erance in ten thousandths of an inch.

Code 1824 and a value, entered on the SRS, will specify the maximum amount of insertion force in pounds.

Code 1825 and a value, entered on the SRS, will specify the minimum insertion depth in thousandths of an inch of a Class 5 maximum diameter test pin.

Code 1826 and a value, entered on the SRS, will specify the minimum test pin diameter in thousandths of an inch.

Code 1827 and a value, entered on the SRS, will specify the minimum pin diameter minus tolerance in ten thousandths of an inch.

Code 1828 and a value, entered on the SRS, will specify the minimum insertion, depth in thousandths of an inch of a Class 5 minimwm diameter test pin.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1829 and a value, entered on the SRS, will specify the minimum withdrawal force of the minimum diameter test pin in ounces.

Code 1830 is the 1006 requirements code (5.4).

Code 1831 is the 1006 except requirements code (5.4).

Code 1832 and an "X", entered on the SRS, will specify that the adapter shall meet the requirements of the gage test.

5.29 Heat Aging (Switches)

Code 1842 is the 1006 test code (5.4).

Code 1843 is the 1006 except code (5.4).

Code 1844 and an "X", entered on the SRS, will specify to test in accordance with MIL-S-55041.

Codes 1845 and 1846 and values, entered on the SRS, will specify the oven temperature in degrees Celsius and the tolerance in plus or minus degrees Celsius respectively. If Code 1845 is used, it is mandatory that Code 1846 be used.

Code 1847 and a value, entered on the SRS, will specify the duration in hours of component exposure to the high temperature. If Code 1845 is used, it is mandatory that Code 1847 be used.

Codes 1848 and 1849 and values, entered on the SRS, will specify the lowered oven temperature in degrees Celsius and the tolerance in plus or minus degrees Celsius respectively. If Code 1848 is used, it is mandatory that Code 1849 be used

Code 1850 is the 006 requirements code (5.4).

Code 1851 is the 006 except requirements code (5.4).

Code 1852 and an "X", entered on the SRS, will specify that the component shall show no evidence of voltage breakdown.

Code 1853 and a value, entered on the SRS, will specify the Insertion Loss, which is measured after the test in maximum db.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.30 High Temperature

Code 3040 is the 1006 test code (5.4).

Code 3041 is the 1006 except test code (5.4).

Code 3042 and a number, entered on the SRS, will specify the applicable test procedure number from Method 501 of MIL-STD-810. Code 3042 is mandatory.

Code 3043 and a value, entered on the SRS, will specify the duration of component operation in hours while the chamber temperature is maintained at the highest operating temperature.

Code 3044 and a value, entered on the SRS, will specify the highest operating temperature in degrees Celsius during component operation.

Code 3047 is the 1006 requirements code (5.4).

Code 3048 is the 1006 except requirements code (5.4).

Code 3049 and an "X", entered on the SRS, will spectiy that the component shall show no evidence of damage.

Code 3051 and a value, entered on the SRS, will specify the maximum attenuation in db.

Code 3052 and 3053 and values, entered on the SRS, will specify the attenuation 'range in db.

Code 3054 and a value, entered on the SRS, will specify the maximum insertion loss in db.

Code 3055 and a value, entered on the SRS, will specify the maximum resetability error in plus or minus db.

Code 3056 and a number, entered on the SRS, will specify the maximum VSWR .

Code 3057 and an "X", entered on the SRS, will specify that the part shall be within tolerance and shall meet design or performance characteristics.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.31 Humidity

Code 4787 is the 1006 test code (5.4).

Code 4788 is the 1006 except test code (5.4).

Code 4853 and an "X", entered on the SRS, will specify to test in accordance with MIL-STD-202, Method 103.

Code 4890 and a letter, entered on the SRS, will specify the applicable test condition letter from Method 103 of MIL-STD-202. Code 4890 is mandatory.

Code 4793 and a value, entered on the SRS, will specify the polarizing voltage in volts dc applied to the component during exposure.

Code 4969 and an "X", entered on the SRS, will specify that the points of test voltage application shall be between mutually insulated parts.

Code 4970 and an "X", entered on the SRS, will specify that the points of test voltage application shall be between all insulated parts and ground.

Code 4971 and an "X", entered on the SRS, will specify that the points of test voltage application shall be between current carrying parts and case.

Code 4790 and a value, entered on the SRS, will specify the duration of application of polarizing voltage in hours.

Code 4816 and a value, entered on the SRS, will specify the duration of the test in hours.

Code 4797 is the 1006 requirements code (5.4).

Code 4798 is the 1006 except requirements code (5.4).

Code 4799 and an "X", entered on the SRS, will specify that there shall be no evidence of corrosion or physical damage.

Code 3160 and a value, entered on the SRS, will specify the maximum attenuation value in db.

Code 3161 and a value, entered on the SRS, will specify the maximum deviation in percent of the attenuation range at high humidity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 3162 and a value, entered on the SRS, will specify the maximum deviation in percent of the attenuation range after drying.

Code 3163 and a value, entered on the SRS, will specify the maximum insertion loss in db.

Code 3164 and a value, entered on the SRS, will specify the minimum insul ation resistance in megohms at high humidity.

Code 3165 and a value, entered on the SRS, will specify the minimum insu lation resistance in megohms after drying.

Code 3166 and a number, entered on the SRS, will specify the maximum VSWR.

Code 3167 and a value, entered on the SRS, will specify the maximum percentage of VSWR deviation at high humidity.

Code 3168 and a value, entered on the SRS, will specify the maximum percentage of VSWR deviation after drying.

Code 4791 and an "X", entered on the SRS, will specify that the component shall remain within tolerance.

Code 4815 and an "X", entered on the SRS, will specify that there shall be no degradation of component performance.

5.32 Insertion Loss

Code 1856 is the 1006 code (5.4).

Code 1857 is the 1006 except code (5.4).

Code 1858 and a document designation, entered on the SRS, will specify that this test shall be in accordance with the document (5.7).

Code 1859 and an 'X", entered on the SRS, will specify that the Insertion Loss shall be measured by a substitution technique using radio frequency.

Code 1860 and an "X" , entered on the SRS, will specify that the Insertion Loss shall be measured by a substitution technique using audio frequency.

Code 1861 and an "X", entered on the SRS, will specify that the Insertion Loss shall be measured by a substitution technique using inter- mediate frequency.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1862 and a value, entered on the SRS, will specify the final indication of maximum reflection coefficient on the ratio meter.

Code 1863 is the 1006 requirements code (5.4).

Code 1864 is the 1006 except requirements code (5.4).

Code 1865 and a value, entered on the SRS, will specify the maximum value of attenuation in db at the minimum attenuation position, across the operating frequency range.

Code 1866 and a value, entered on the SRS, will specify the maximum insertion loss in db.

Codes 1867 and 1868 and values, entered on the SRS, will specify the test frequency range in gigahertz during the measurement of insertion loss. Code 1867 will specify the minimum frequency in the range; Code 1868 will specify the maximum frequency. If Code 1866 is used, it is mandatory that Codes 1867 and 1868 be used.

5.33 Insulation Resistance

Code 1370 is the 1006 test code (5.4).

Code 1371 is the 1006 except test code (5.4).

Code 1511 and an "X", entered on the SRS, will specify to test in accordance with Method 302 of MIL-STD-202.

Code 1378 and a letter, entered on the SRS, will specify the applicable test condition letter from Method 302 of MIL-STD-202. It is mandatory that Code 1378 or 1373 be used.

Code 1373 and a value, entered on the SRS, will specify the test voltage in volts dc and will specify that the insulation resistance test method shall be as specified in Method 302 of MIL-STD-202.

Code 1376 and a value, entered on the SRS, will specify the electrification time in seconds if other than two minutes electrification time is desired.

Code 1377 and a value, entered on the SRS, will specify the maximum measurement error in percent permitted at the insulation resistance value required if other than 10 percent.

Code 1522 and an "X", entered on the SRS, will specify that the points of measurement shall be between all mutually insulated points.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1523 and an "X", entered on the SRS, will specify that the points of measurement shall be between all insulated points and ground.

Code 1520 and a document designation, entered on the SRS, will specify that special preparations or conditions shall be in accordance with the document (5.7).

Code 1372 and a value, entered on the SRS, will specify the test temperature in degrees Celsius if other than as specified in MIL-STD-202 standard test conditions, or the first test temperature if the insulation resistance test is to be performed at two temperatures.

Code 1381 and a value, entered on the SRS, will specify the second test temperature when the insulation resistance test is to be performed at two temperatures.

Code 1383 and a value, entered on the SRS, will specify the test temperature tolerance in plus or minus degrees Celsius.

Code 1379 is the 1006 requirements code (5.4).

Code 1380 is the 1006 except requirements code (5.4).

Code 1384 and a value, entered on the SRS, will specify the minimum megohms required when only one insulation resistance test is performed.

Code 1387 and a value, entered on the SRS, will specify the minimum megohms required at the second test temperature with Code 1381. Code 1384 shall not be used alone as a requirement but only when Codes 1372 and 1381 are used.

Code 1407 and an "X", entered on the SRS, will specify that there shall be no evidence of physical damage.

Code 1408 and an "X", entered on the SRS, will specify that there shall be no degradation of performance.

3.34 Isolation (Switches)

Code 1870 is the 1006 test code (5.4).

Code 1871 is the 1006 except test code (5.4).

Code 1872 and an "X", entered on the SRS, will specify to test. in accordance with MIL-S-55041,

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1873 and a value, entered on the SRS, will specify the step attenuator minimum isolation setting in db.

Codes 1874 and 1875 and values, entered on the SRS, will specify the swept frequency band in gigahertz.

Code 1876 and a value, entered on the SRS, will specify the crosstalk reference frequency in gigahertz.

Code 1877 is the 1006 requirements code (5.4).

Code 1878 is the 1006 except requirements code (5.4).

Code 1879 and a value, entered on the SRS, will specify the minimum power loss in db.

5.35 Low Temperature

Code 3063 is the 1006 test code (5.4).

Code 3064 is the 1006 except test code (5.4).

Code 3065 and a number, entered on the SRS, will specify the applicable test procedure number from Method 502 of MIL-STD-810.

Code 3066 and a value, entered on the SRS, will specify the lowered storage temperature in minus degrees Celsius.

Code 3067 and a value, entered on the SRS, will specify the duration in hours of lowered test temperature maintenance. If Code 3066 is used, it is mandatory that Code 3067 be used.

Code 3068 and a value, entered on the SRS, will specify the duration of component operation in hours while the chamber is maintained at the lowest operating temperature.

Code 3069 and a value, entered on the SRS, will specify the lowest operating temperature in degrees Celsius. If Code 3069 is used, it is mandatory that Code 3068 be used.

Code 3070 is the 1006 requirements code.

Code 3071 is the 1006 except requirements code.

Code 3072 and an "X", entered on the SRS, will specify that the component shall not be damaged and shall be capable of continuous and intermittent operation.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

Code 3074 and a value, entered on the SRS, will specify the maximum attenuation in db.

Codes 3075 and 3076 and values, entered on the SRS, will specify the attenuation range in db.

Code 3077 and a value, entered on the SRS, will specify the maximum insertion loss in db.

Code 3078 and a value, entered on the SRS, will specify the maximum resetability error in db.

Code 3079 and a number, entered on the SRS, will specify the maximum VSWR.

Code 3080 and an "X", entered on the SRS, will specify that the part shall be within tolerance and shall meet design or performance characteristics.

5.36 Moisture Resistance

Code 1390 is the 1006 test code (5.4).

Code 1391 is the 1006 except test code (5.4).

Cede 1397 and an "X", entered on the SRS, will specify to test in accordance with Method 106 of MIL-STD-202.

Code 4981 and a value, entered on the SRS, will specify the loading voltage in volts dc.

Code 4980 and a value, entered on the SRS, will specify the loading voltage in volts ac.

Code 1395 and a value, entered on the SRS, will specify the polarization voltage in volts dc if other than 100 volts dc.

Lode 4985 and an "X", entered on the SRS, will specify that Step 7A of Method 106, MIL-STD-202, shall not be applicable.

Code 4986 and an "X", entered on the SRS, will specify that Step 7B of Method 106, MIL-STD-202, shall not be applicable.

Code 1399 is the 1006 test code (5.4).

Code 1400 is the 1006 except test code (5.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1407 and an "X", entered on the SRS, will specify there shall be no evidence of corrosion or change in electrical performance.

Code 3170 and a value, entered on the SRS, will specify the maximum attenuation in db.

Code 3171 and 3172 and values, entered on the SRS, will specify the attenuation range in db.

Code 3173 and a value, entered on the SRS, will specify maximum attenuation change in db that exhibits the stability of attenuation.

Code 3174 and a value, entered on the SRS, will specify the maximum insertion loss in db.

Code 3175 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms.

Code 3176 and a number, entered on the SRS, will specify the maximum VSWR.

Code 1398 and an "X", entered on the SRS, will specify that the component shall remain within tolerance.

Code 1392 and an "X", entered on the SRS, will specify that there shall be no degradation of performance of the component.

5.37 Operating Voltage (Switches)

Code 1882 is the 1006 test code (5.4).

Code 1883 is the 1006 except test code (5.4).

Code 1884 and an "X", entered on the SRS, will specify to test in accordance with MIL-S-55041.

Code 1885 is the 1006 requirements code (5.4).

Code 1886 is the 1006 except requirements code (5.4).

Code 1887 and a value, entered on the SRS, will specify the voltage application in volts that shall cause the switch to rotate, slide or move axially from the nonenergized position.

Code 1888 and an "X", entered on the SRS, will specify the nature of the applied voltage shall be ac.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1889 and an "X", entered on the SRS, will speclfy the nature of the applied voltage shall be dc. Code 1889 shall not be used with Code 1888.

5.38 Peak Power (Fixed and Variable Attenuators)

Code 1891 is the 1006 test code (5.4).

Code 1892 is the 1006 except test code (5.4).

Code 1893 and an "X", entered on the SRS, will specify to test in accordance with MIL-A-3933.

Code 1894 and an "X", entered on the SRS, will specify to test in accordance with MIL-A-24Z15.

Code 1895 and a value, entered on the SRS, will specify the test power in kilowatts.

Code 1896 and a value, entered on the SRS, will specify the duration of power application in hours. If Code 1895 is used, it is mandatory that Code 1896 be used.

Code 1897 and a value, entered on the SRS, will specify the maximum power in kilowatts applied during attenuation measurements.

Code 1858 and a value, entered on the SRS, will specify the adjusted maximum operating frequency in gigahertz when the maximum power is applied. if Code 1897 is used, it is mandatory that Code 1898 be used.

Code 1899 and an "X", entered on the SRS, will specify that attenuation shall be measured after the test.

Code 1900 and an "X", entered on the SRS, will specify that attenuation change shall be measured after the test.

Code 1901 and an "X", entered on the SRS, will specify that dial calibration shall be measured during the test.

Code 1902 and an "A", entered on the SRS, will specify that VSWR shall be measured during the test.

Code 1903 is the 1006 requirements code (5.4).

Code 1904 is the 1006 except requirements code (5.4),

Code 1905 and a number, entered on the SRS, will specify the maximum VSWR.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1906 and a value, entered on the SRS, will specify the maximum attenuation change in db.

Code 1907 and an "X", entered on the SRS, will specify that the dial calibration requirements shall be met.

Code 1908 and an "X", entered on the SRS, will specify that there shall be no evidence of mechanical damage.

5.39 Power Dissipation (Couplers)

Code 1911 is the 1006 test code (5.4).

Code 1912 is the 1006 except test code (5.4).

Code 1913 and an "X", entered on the SRS, will specify to test in accordance with MIL-C-15370.

Codes 1914 and 1915 and values, entered on the SRS, will specify the frequency range in gigahertz during the determination of the secondary line termination power dissipation. Code 1914 will specify the lower end of the range; Code 1915 will specify the upper end.

Code 1916 and a value, entered on the SRS, will specify the continuous-wave power rating of the primary line in watts.

Code 1917 and a value, entered on the SRS, will specify the midfrequency in gigahertz during the measurement of the secondary line VSWR.

Code 1918 and an "X", entered on the SRS, will specify that the alternate test shall be conducted.

Code 1919 is the 1006 requirements code (5.4).

Code 1920 is the 1006 except requirements code (5.4).

Code 1921 and a number, entered on the SRS, will specify the maximum VSWR of the secondary line.

5.40 Power Handling Capacity (Switches)

Code 1925 is the 1006 test code (5.4).

Code 1926 is the 1006 except test code (5.4).

Code 1927 and an "X", entered on the SRS, will specify to test in accordance with MIL-S-55041.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1928 and a value, entered on the SRS, will specify the peak test power in kilowatts.

Code 1929 and a value, entered on the SRS, will specify the average test power in watts.

Code 1930 and a value, entered on the SRS, will specify the line pressure in psig during testing.

Code 193] is the 1006 requirements code (5.4).

Code 1932 is the 1006 except requirements code (5.4).

Code 1933 and an "X", entered on the SRS, will specify that there shall be no voltage breakdown nor evidence of deterioration such as arcing, high current surges, and excessive release of moisture.

Code 1934 and a value, entered on the SRS, will specify the maximum temperature of the switch in degrees Celsius.

5.41 Radio Noise

Code 1936 is the 1006 test code (5.4).

Code 1937 is the 1006 except test code (5.4).

Code 1938 and an "X", entered on the SRS, will specify to test in accordance with MIL-STD-461 and MIL-STD-462.

Code 1939 and a number, entered on the SRS, will specify the applicable test method number as specified in MIL-STD-462. The test method number consists of two letters followed by two digits. The letters define the type of test, such as "RE" for "Radiated Emission. " The digits define the order of testing from 01 to 99. Code 1939 is mandatory.

Code 1940 and a number-letter combination, entered on the SRS, will specify the Equipment Class designation. If Code 1939 is used, it is mandatory that Code 1940 be used.

Code 1941 will specify the test table number in the Appendix of MIL-STD-461 for equipment which was originally procured prier to the effective date of MIL-5TD-461 and 462 (31 July 1967).

Code 1942 is the 1006 requirements code (5.4).

Code 1943 is the 1006 except requirements code (5.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1944 and a value, entered on the SRS, will specify the maximum generated and radiated narrow band E-field emissions in db above one microvolt per metre.

Code 1945 and a value, entered on the SRS, will specify the maximum generated and radiated broadband and pulsed CW radiated emissions in db above one microvolt per metre per megacycle.

5.42 Rain

Code 3086 is the 1006 test code (5.4).

Code 3087 is the 1006 except test code (5.4).

Code 3088 and an "X", entered on the SRS, will specify to test in accordance with Method 506 of MIL-STO-81O.

Code 3089 and a value, entered on the SRS, will specify the simulated exposure rainfall rate in inches per hour.

Code 3090 and a value, entered on the SRS, will specify the simulated rainfall tolerance rate in plus or minus inches per hour. If Code 3089 is used, it is mandatory that Code 3090 be used.

Code 3091 and a value, entered on the SRS, will specify the duration of exposure in minutes to the simulated rainfall.

Code 3092 and a value, entered on the SRS, will specify the elevated chamber temperature in degrees Celsius.

Code 3093 and a value, entered on the SRS, will specify the duration of exposure in hours to the simulated rainfall.

Code 3095 is the 1006 requirements code (5.4).

code 3096 is the 1006 except requirements code (5.4).

Code 3097 and an "X", entered on the SRS, will specify that there shall De no evidence of deterioration of quality.

Code 3099 and a value, entered on the SRS, will specify the maximum attenuation in db.

Source: https://assist.dla.mil -- Downloaded: 2026t0-26T07:24Z
Check the source to verify that this is the current version before use.

Codes 3100 and 3101 and values, entered on the SRS, will specify the attenuation range in db.

Code 3102 and a value, entered on the SRS, will specify the maximum attenuation change in db that exhibits the stability of attenuation.

Code 3103 and a value, entered on the SRS, will specify the maximum insertion loss in db.

Code 3104 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms.

Code 3105 and a number, entered on the SRS, will specify the maximum VSWR.

Code 3106 and an "X", entered on the SRS, will specify that the part shall be within tolerance and shall meet design or performance characteristics.

5.43 Release Voltage (Switches)

Code 1946 is the 1006 test code (5.4).

Code 1947 is the 1006 except test code (5.4).

Code 1948 and an "X", entered on the SRS, will specify to test in accordance with MIL-S-55041.

Code 1949 is the 1006 requirements code (5.4).

Code 1950 is the 1006 except requirements code (5.4).

Code 1951 and a value, entered on the SRS, will specify the reduced operating voltage that will cause the switch to rotate, slide or move axially from the energized position to the unenergized position.

Code 1952 and an "X", entered on the SRS, will specify the nature of the release voltage shall be dc.

Code i953 and an "X", entered on the SRS, will specify the nature of the release voltage shall be ac.

Source: https://assist.dla.mil -- Downloaded: 2026t0-26T07:24Z
Check the source to verify that this is the current version before use.

5.44 Repeatability (Variable Attenuators)

Code 1955 is the 1006 test code (5.4).

Code 1956 is the 1006 except test code (5.4).

Code 1957 and an "X", entered on the SRS, will specify to test in accordance with MIL-A-24215.

Code 1958 and a value, entered on the SRS, will specify the number of cycles the attenuator shall be operated from minimum through maximum attenuation.

Code 1959 is the 1006 requirements code (5.4).

Code 1960 is the 1006 except requirements code (5.4).

After cycling, various electrical tests are to be performed. Requirements for these tests and applicable code numbers are described below.

Code 1961 and a value, entered en the SRS, will specify the maximum attenuation in db.

Codes 1962 and 1963 and values, entered on the SRS, will specify the attenuation range in db.

Code 1964 and a value, entered on the SRS, will specify the dial accuracy in plus or minus db. Code 1964 is not to be used with Code 1965.

Code 1965 and a value, entered on the SRS, will specify the dial accuracy in plus or minus percent.

Code 1966 and a value, entered on the SRS, will specify the dial accuracy measurement frequency in gigahertz. If Codes 1964 or 1965 are used, it is mandatory that Code 1966 be used.

Code 1967 and a value, entend on the SRS, will specify the total variation in attenuation in maximum db across the operating frequency range.

Code 1968 and a value, entered on the SRS, will specify the maximum insertion loss in db.

If Power Capability is selected as a post-test performance requirement, the following codes (1969, 1970, 1971) would be considered mandatory:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1969 and a value, entered on the SRS, will specify the maximum test power in watts.

Code 1970 and a number, entered on the SRS, will specify the maximum VSWR at maximum test power.

Code 1971 and a value, entered on the SRS, will specify the dial accuracy in plus or minus db at maximum test power.

Code 1972 and a value, entered on the SRS, will specify the temperature coefficient in db/db/degrees Celsius.

Code 1973 and a number, entered on the SRS, will specify the maximum VSWR.

5.45 Resetability Error (Variable Attenuators)

Code 1976 is the 1006 test code (5.4).

Code 1977 is the 1006 except test code (5.4).

Code 1978 and an "X", entered on the SRS, will specify to test in accordance with MIL-A-38728.

Code 1979 is the 1006 requirements code (5.4).

Code 1980 is the 1006 except requirements code (5.4).

Code 1981 and a value, entered on the SRS, will specify the maximum resetability error in plus or minus db.

Code 1982 and a value, entered on the SRS, will specify the dial setting in db while measuring the resetability error.

If Code 1981 is used, it is mandatory that Code 1982 be used.

5.46 Salt Spray (Corrosion)

Code 4769 is the 1006 test code (5.4).

Code 4770 is the 1006 except test code (5.4)

Code 4771 and an "X", entered on the SRS, will specify to test in accordance with Method 101 of MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 4772 and a letter, entered on the SRS, will specify the applicable test condition letter from Method 101 of MIL-STD-202. Code 4772 is mandatory.

Code 4765 and an "X", entered on the SRS, will specify that the component shall be mounted by the normal method.

Code 4766 and an "X", entered on the SRS, will specify that the component shall be mounted by any suitable method.

Code 4773 and a document designation, entered on the SRS, will specify the salt spray mounting method in accordance with the document.

Code 4877 is the 1006 requirements code (5.4).

Code 4878 is the 1006 except requirements code (5.4).

Code 4782 and an "X", entered on the SRS, will specify that there shall be no evidence of corrosion, physical damage or degradation of performance.

Code 3180 and a value, entered on the SRS, will specify the maximum attenuation in db.

Code 3181 and a value, entered on the SRS, will specify the maximum attenuation change in db that exhibits the stability of attenuation.

Code 3182 and a value, entered on the SRS, will specify the maximum insertion loss in db.

Code 3183 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms.

Code 3184 and a value, entered on the SRS, will specify the operating voltage in dc that will cause the switch to rotate, slide or move axially.

Code 3185 and an "X", entered on the SRS, will specify that the component shall be subjected to a power handling capacity test.

Code 3186 and a value, entered on the SRS, will specify the maximum (switching time in milliseconds between positions of the switch.

Code 3187 and a number, entered on the SRS, will specify the maximum VSWR.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.47 Sand and Dust

Code 4951 is the 1006 test code (5.4).

Code 4952 is the 1006 except test code (5.4).

Code 4960 and an "X", entered on the SRS, will specify to test in accordance with Method 110 of MIL-STD-202.

Code 3189 and an "X", entered on the SRS, will specify that the component shall be reoriented during the test.

Code 3190 and a value, entered on the SRS, will specify the duration of component operation in hours while under exposure.

Code 4956 and an "X", entered on the SRS, will specify that the second 6-hour test shall be performed immediately after temperature stabilization.

Code 4957 is the 1006 requirements code (5.4).

Code 4958 is the 1006 except requirements code (5.4).

Code 4959 and an "X", entered on the SRS, will specify that the component shall show no evidence of dust penetration.

Code 3191 and a value, entered on the SRS, will specify the maximum attenuation in db.

Code 3192 and a value, entered on the SRS, will specify the maximum insertion loss in db.

Code 3193 and a number, entered on the SRS, will specify the maximum VSWR.

Code 3194 and an "X", entered on the SRS, will specify that the part shall be within tolerance and shall meet design or performance characteristics.

5.48 Seal

Code 4733 is the 1006 test code (5.4).

Code 4734 is the 1006 except test code (5.4).

Code 4732 and an "X", entered on the SRS, will specify to test in accordance with Method 112 of MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 4737 and a letter, entered on the SRS, will specify test condition letter, Method 112 of MIL-STD-202. To detail a seal test, Code 4737 is mandatory.

If test condition letter A or B is specified, Codes 4738 and/or 4739 may be used if exception to the parameters in the specified test condition letter are required. These codes and information concerning them are as follows:

Code 4738 and a media description, entered on the SRS, will specify the media to be used for the immersion bath. If Code 4738 is used, the use of Code 4739 is mandatory.

Code 4739 and a value, entered on the SRS, will specify the minimum bath temperature in degrees Celsius.

If test condition letter C is specified, Codes 4740 and 4741 are mandatory. Information concerning them is as follows:

Code 4740 and a number, entered on the SRS, will specify the applicable procedure as specified in test condition letter C, Method 112 of MIL-STD-202.

Code 4741 and a value, entered on the SRS, will specify the leak rate sensitivity setting in ATM cc/see for the applicable leak detector in accordance with the procedure specified.

Code 4750 and a letter, entered on the SRS, will specify the gross leak test condition letter applicable after completion of procedure III or IV, test condition C, Method 112 of MIL-STD-202.

Code 4751 and a value, entered on the SRS, will specify the pressure in torr to which the chamber is to be evacuated for procedure IV of test condition C, Method 112 of MIL-STD-202. Do not use Code 4751 with Code 4735.

Code 4735 and a value, entered on the SRS, will specify the pressure in kilopascals to which the chamber is to be evacuated for Procedure IV, test condition C, Method 112 of MIL-STD-202. Do not use Code 4735 with Code 4751.

Code 4752 and a value, entered on the SRS, will specify the duration in minutes of reduced pressure for procedure IV of test condition C of Method 112 of MIL-STD-202.

Code 4743 and an "X", entered on the SRS, will specify that any suitable mounting fixture may be used for test condition letters D or E, Method 112 of MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

Code 3196 and an "X", entered on the SRS, will specify that insulation resistance shall be measured after the test.

Code 4744 is the 1006 requirements code (5.4).

Code 4745 is the 1006 except requirements code (5.4).

Code 4746 and an "X", entered on the SRS, will specify that the leak rate measured shall be not greater than the leak rate sensitivity specified. This code is intended for use when test condition letter C is specified, but may be used with any test condition letter, Method 112 of MIL-STD-202.

Code 4748 and an "X", entered on the SRS, will specify that bubbles indicative of leakage shall not be observed. This code is applicable to all test condition letters.

Code 3197 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms.

Code 4758 and an "X", entered on the SRS, will specify that the part shall remain within tolerance.

5.49 Sensitivity of Attenuation (Fixed Attenuators)

Code 1993 is the 1006 test code (5.4).

Code 1994 is the 1006 except test code (5.4).

Code 1995 and an "X", entered on the SRS, will specify to test in accordance with MIL-A-3933.

Codes 1996 through 2001 are mandatory.

Codes 1996 and 1997 and values, entered on the SRS, will specify the frequency range extremes in gigahertz for measurement of attenuation. Code 1996 will specify the lower extreme; Code 1997 will specify the higher extreme.

COde 1998 and a value, entered on the SRS, will specify the full input power in watts durinq attenuation measurement.

Code 1999 and a value, entered on the SRS, will specify the reference power in watts during attenuation measurement.

Code 2000 and a value, entered on the SRS, will specify the minimun temperature in degrees Celsius during attenuation measurement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 2001 and a value, entered on the SRS, will specify the maximum temperature in degrees Celsius during attenuation measurement.

Code 2002 is the 1006 requirements code (5.4).

Code 2003 is the 1006 except requirements code (5.4).

Code 2004 and a value, entered on the SRS, will specify the maximum change in attenuation at either extreme of the operating frequency, at full input power, or at either extreme of the operating temperature.

5.50 Shock (Variable Attenuators)

Code 3200 is the 1006 test code (5.4).

Code 3201 is the 1006 except test code (5.4).

Code 3202 and an "X", entered on the SRS, will specify to test in accordance with MIL-A-38728.

Code 3203 is the 1006 requirements code (5.4).

Code 3204 is the 1006 except requirements code (5.4).

Code 3205 and an "X", entered on the SRS, will specify that there shall be no evidence of physical damage.

Code 3206 and an "X", entered on the SRS, will specify that the component shall meet the requirements of the individual Group A tests of MIL-A-38728.

Code 3207 and an "X", entered on the SRS, will specify that the part shall be within tolerance and shall meet design or performance characteristics.

5.51 Shock, Specified Pulse

Code 1501 is the 1006 test code (5.4).

Code 1502 is the 1006 except test code (5.4).

Code 1500 and an "X", entered on the SRS, will specify to test in accordance with Method 213 of MIL-STD-202.

Code 1504 and a letter, entered on the SRS, will specify the applicable test condition letter from Method 213 of MIL-STD-202. Code 1504 is mandatory.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

There are three codes to specify mounting. Only one of these codes may be used. These codes and information concerning them are as follows:

Code 4864 and a document designation, entered on the SRS, will specify that mounting shall be in accordance with the document. The applicable test name from the reference document should be entered on the SRS in addition to the document designation (5.7).

Code 4685 and an "X", entered on the SRS, will specify that mounting shall be by normal mounting means.

Code 4686 and an "X", entered on the SRS, will specify that mounting snail be by any suitable method.

Code 1507 is the 1006 requirements code (5.4).

Code 1508 is the 1006 except requirements code (5.4).

Code 1509 and an "X", entered on the SRS, will specify no evidence of physical damage.

Code 3210 and a value, entered on the SRS, will specify the maximum attenuation in db.

Codes 3211 and 3212 and values, entered on the SRS, will specify the attenuation range in db.

Code 3213 and a value, entered on the SRS, will specify the maximum attenuation change that exhibits the stability of attenuation.

Code 3214 and a value, entered on the SRS, will specify the maximum insertion loss in db.

Code 3215 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms.

Code 3216 and a value, entered on the SRS, will specify the maximum resetability error in plus or minus db.

Code 3217 and a number, entered on the SRS, will specify the maximum VSWR.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 3218 and an "X", entered on the SRS, will specify the component shall be within tolerance and shall meet design or performance characteristics.

5.52 Switching Time (Switches)

Code 1985 is the 1006 test code (5.4).

Code 1986 is the 1006 except test code (5.4).

Code 1987 and an "X", entered on the SRS, will specify to test in accordance with MIL-S-55041.

Code 1988 is the 1006 requirements code (5.4).

Code 1989 is the 1006 except requirements code (5.4).

Code 1990 and a value, entered on the SRS, will specify the maximum time in milliseconds between energized and unenergized positions of the switch.

5.53 Temperature/Altitude

Code 3109 is the 1006 test code (5.4).

Code 3110 is the 1006 except test code (5.4).

Code 3111 and an "X", entered on the SRS, will specify to test in accordance with MIL-T-5422.

Code 3112 is the 1006 requirements code (5.4).

Code 3113 is the 1006 except requirements code (5.4).

Code 3114 and an "X", entered on the SRS, will specify that the component shall show no evidence of voltage breakdown.

Codes 3115, 3116, and 3117 specify performance requirements after the Temperature/Altitude test.

Code 3115 and a value, entered on the SRS, will specify the maximum attenuation in db.

Code 3116 and a value, entered on the SRS, will specify the maximum insertion loss in db.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 3117 and a number, entered on the SRS, will specify the maximum VSWR.

Code 3118 and an "X", entered on the SRS, will specify the power handling capacity shall be exhibited during the test by the application of peak power, average power, and line pressure with no voltage breakdown nor evidence of deterioration.

Code 3119 and an "X", entered on the SRS, will specify that the part shall be within tolerance and shall meet design or performance characteristics.

5.54 Temperature Coefficient

Code 2007 is the 1006 test code (5.4).

Code 2008 is the 1006 except test code (5.4).

Code 2009 and a letter, entered on the SRS, will specify the applicable test condition letter from Method 107 of MIL-STD-202. The *use* of Code 2009 is mandatory.

Code 2010 and an "X", entered on the SRS, will specify that the temperature coefficient shall be measured at each setting for step type attenuators.

Code 2011 and an "X", entered on the SRS, will specify that the temperature coefficient shall be measured at minimum and maximum settings for continuously variable type attenuators.

Code 2012 is the 1006 requirements code (5.4).

Code 2013 is the 1006 except requirements code (5.4).

Code 2014 and a value, entered on the SRS, will specify the temperature coefficient in db/db/degrees Celsius.

5.56 Thermal Shock

Code 4712 is the 1006 test code (5.4).

Code 4713 is the 1006 except test code (5.4).

Code 4704 and a value entered on the SRS, will specify the number of thermal cycles.

To detail a thermal smock test, it is mandatory to USE Codes 4714 and 4715.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 4714 and an "X", entered on the SRS, will specify to test in accordance with Method 107 of MIL-STD-202.

Code 4715 and a letter, entered on the SRS, will specify the applicable test condition letter.

Code 4719 and a document designation, entered on the SRS, will specify mounting shall be in accordance with the document (5.7).

Code 4720 is the 1006 requirements code (5.4).

Code 4722 is the 1006 except requirements code (5.4).

Code 4723 and an "X", entered on the SRS, will specify no evidence of mechanical damage. This code is mandatory when requirements after the thermal shock test are to be detailed.

Code 3220 and a value, entered on the SRS, will specify the maximum attenuation in db.

Codes 3221 and 3222 and values, entered on the SRS, will specify the attenuation range in db.

Code 3223 and a value, entered on the SRS, will specify the maximum attenuation change in db that exhibits the stability of attenuation.

Code 3224 and a value, entered on the SRS, will specify the accuracy of the dial assembly in plus or minus db.

Code 3225 and a value, entered on the SRS, will specify the dial assembly accuracy measurement frequency in gigahertz. If Code 3224 is used, it is mandatory that Code 3225 be used.

Code 3226 and a value, entered on the SRS, will specify the accuracy of the dial assembly in plus or minus percent.

Code 3227 and a value, entered on the SRS, will specify the dial assembly accuracy measurement frequency in gigahertz. If Code 3226 is used, it is mandatory that Code 3227 be used.

Codes 3224 and 3225 are not to be used with Codes 3226 and 3227.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 3228 and a value, entered on the SRS, will specify the maximum insertion loss in db.

Code 3229 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms.

Code 3230 and an "X", entered on the SRS, will specify the power handling test shall be performed.

Code 3231 and a value, entered on the SRS, will specify the maximum resetability error in plus or minus db.

Code 3232 and a number, entered on the SRS, will specify the maximum VSWR .

Code 3233 and an "X", entered on the SRS, will specify that the part shall be within tolerance and shall meet design or performance characteristics.

5.56 Vibration, High Frequency

Code 1445 is the 1006 test code (5.4).

Code 1446 is the 1006 except test code (5.4).

Code 1447 and an "X", entered on the SRS, will specify to test in accordance with Method 204 of MIL-STD-202. To detail the high frequency vibration test, Code 1447 and Code 1448 are mandatory.

Code 1448 and a letter, entered on the SRS, will specify the applicable test condition letter as selected from Method 204 of MIL-STD-202.

There are three codes available to specify the method of mounting. Only one may be used. These codes and information concerning them follows:

Code 4708 and an "X", entered on the SRS, will specify that normal usage mounting means shall be used.

Code 4707 and a document designation, entered on the SRS, will specify to mount in accordance with the document (5.7).

Code 4709 and an "X", entered on the SRS, will specify that any suitable mounting method may be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

There are two codes available to specify the method of determining mechanical resonance. Only one of the codes may be entered. These codes and information concerning them are as follows:

Code 1533 and an "X", entered on the SRS, will specify that mechanical resonance shall be monitored visually by means of a strobotac.

Code 1534 and an "X", entered on the SRS, will specify that mechanical resonance shall be monitored by electrical output indicators.

Code 1442 and a letter, entered on the SRS, will specify the applicable test circuit letter from Method 310 of MIL-STD-202.

Code 1444 and a letter, entered on the SRS, will specify the applicable test condition letter from Method 310 of MIL-STD-202 that defines the maximum allowable time-duration of contact opening or closing during monitoring. The use of Codes 1442 and 1444 are mandatory.

Code 3243 and an "X", entered on the SRS, will specify the seal test shall be performed after vibration.

Code 1454 is the 1006 requirements code (5.4).

Code 1455 is the 1006 except requirements code (5.4).

Code 1456 and an "X", entered on the SRS, will specify no evidence of physical damage. This code is mandatory when requirements after the high frequency vibration test are to be detailed.

Code 3244 and an "X", entered on the SRS, will specify there shall be no leakage as detected by the continuous escaping of bubbles.

Code 3235 and a value, entered on the SRS, will specify the maximum attenuation in db.

Codes 3236 and 3237 and values, entered on the SRS, will specify the attenuation range in db.

Code 3238 and a value, entered on the SRS, will specify the maximum attenuation change in db that exhibits the stability of attenuation.

Code 3239 and a value, entered on the SRS, will specify the maximum insertion loss in db.

Code 3240 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 3241 and a value, entered on the SRS, will specify the maximum resetability error in plus or minus db.

Code 3242 and a number, entered on the SRS, will specify the maximum VSWR.

Code 1480 and an "X", entered on the SRS, will specify that the part shall remain within tolerance.

5.57 Vibration, Low Frequency

Code 465 is the 1006 test code (5.4).

Code 466 is the 1006 except test code (5.4).

Code 467 and an "X", entered on the SRS, will specify to test in accordance with Method 201 of MIL-STD-202. To detail' the low frequency vibration test, Code 1467 is mandatory.

Code 1468 and an "X", entered on the SRS, will specify to test in accordance with MIL-A-38728.

Code 4973 and a value, entered on the SRS, will specify the vibration time in minutes in each of three axes. Codes 4973 and" 1470 are not to be used together.

Code 1470 and a value, entered on the SRS, will specify the duration in hours of vibration per axis. This code should only be used when the required vibration per axis is other than two hours as specified in Method 201 of MIL-STD-202.

Code 1491 and a letter, entered on the SRS, will specify the applicable test circuit letter from Method 310 of MIL-STD-202. The use of this code is mandatory.

Code 1492 and a letter, entered on the SRS, will specify the applicable test condition letter from Method 310 of MIL-STD-202 that defines the maximum allowable time-duration of contact opening or closing during monitoring. The use of this code is mandatory.

There are three codes available to specify the method of mounting. Only one may be used. These codes and information concerning them are as follows:

Code 4731 and an "X", entered on the SRS, will specify any suitabie mounting method may be used.

Source: https://assist.dla.mil -- Downloaded: 2026t0-26T07:24Z
Check the source to verify that this is the currentversion before use.

Code 4730 and an "X", entered on the SRS, will specify normal mounting means shall be used.

Code 4729 and a document designation, entered on the SRS, will specify to mount in accordance with the document (5.7).

There are three codes available to specify the direction of motion. These may be used as required.

Code 4978 and an "X", entered on the SRS, will specify that the direction of motion shall be 90 degrees from the center line of the most sensitive axis.

Code 4979 and an "X", entered on the SRS, will specify that the direction of motion shall be on the center line of the most sensitive axis.

Code 4995 and a document designation, entered on the SRS, will specify that the direction of vibration motion shall be in accordance with the document (5.7).

Code 1472 and a value, entered on the SRS, will specify the electrical load in ohms.

Code 3245 and an "X", entered on the SRS, will specify that a pressurization test shall be performed after the vibration test.

Code 3246 and a value, entered on the SRS, will specify the total displacement of the component in inches during vibration as specified in MIL-A-38728.

Codes 3247 and 3248 and values, entered on the SRS, will specify the vibration frequencies in gigahertz. If Code 3246 is used, it is mandatory that Codes 3247 and 3248 be used.

Code 1474 is the 1006 requirements code (5.4).

Code 1475 is the 1006 except requirements code (5.4).

Code 1476 and an "X", entered on the SRS, will specify no evidence of physical damage. This code is mandatory when requirements after the high frequency vibration test are to be detailed.

Code 3250 and an "X", entered on the SRS, will specify that there shall be no leakage as detected by the continuous escaping of bubbles.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 3251 and a value, entered on the SRS, will specify the maximum attenuation in db.

Codes 3252 and 3253 and values, entered on the SRS, will specify the attenuation range in db.

Code 3254 and a value, entered on the SRS, will specify the maximum change in attenuation in db that exhibits the stability of attenuation.

Code 3255 and a value, entered on the SRS, will specify the maximum insertion loss in db.

Code 3256 and a value, entered on the SRS, will specifiy the minimum insulation resistance in megohms.

Code 3257 and a value, entered on the SRS, will specify the maximum resetability error in plus or minus db.

Code 3258 and a number, entered on the SRS, will specify the maximum VSWR.

Code 1480 and an "X", entered on the SRS, will specify that the part shall remain within tolerance.

5.58 Vibration, Random

Code 1425 is the 1006 test code (5.4).

Code 1426 is the 1006 except test code (5.4).

Code 1427 and an "X", entered on the SRS, will specify to test in accordance with Method 214 of MIL-STD-202. To detail the random vibration test, Codes 1427 and 1428 are mandatory.

Code 1428 and a number and letter, entered on the SRS, will specify the applicable test condition number and letter as selected from Method 214 of MIL-STD-202. Enter the number (I or II) and follow with the letter, for example, IB or IIK.

It is mandatory that one duration of application per axis be specified. Do not use Code 1438 with Code 1431. Information concerning them is as follows:

Code 1438 and a value, entered on the SRS, will specify the duration in minutes of the random excitation per axis. The options are 3 or 15 minutes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1431 and a value, entered on the SRS, will specify the duration in hours of the random excitation per axis. The options are 1.5 and 8 hours.

There are three codes to specify the monitoring instrumentation of the excitation. Only one may be selected.

Cede 1452 and an "X", entered on the SRS, will specify that any suitable system may be used to monitor excitation.

Code 1453 and an "X", entered on the SRS, will specify the use of a calibrated ac to dc converter and a strip chart recorder to monitor excitation.

Code 1459 and an "X", entered on the SRS, will specify the use of a calibrated oscilloscope to monitor excitation.

Code 1430 and a value, entered on the SRS, will specify the quantity of vibration monitoring test points.

Codes 1439 or 1462 may be used to specify the location of the test point(s).

Only one of the two following codes is to be used:

Code 1439 and an "X", entered on the SRS, will specify that the location of vibration monitoring points shall be any suitable location.

Cede 1462 and an "X", entered on the SRS, will specify that the location of vibration monitoring points shall be as close as practical to the test specimen.

There are three codes available to specify the method of mounting. only one may be used. These codes and information concerning them follows:

Code 4976 and an "X", entered on the SRS, will specify normal mounting means shall be used.

Code 4975 and a document designation, entered on the SRS, will specify to mount in accordance with the document. The applicable test name from the referenced document should be entered in addition to the document designation (5.7)

Code 4977 and an "X", entered on the SRS, will specify any suitable mountinq method may be used.

Code 3260 and an "X", entered *on* the SRS, will specify that a pressuriza- tion test is required,

Source: https://assist.dla.mil -- Downloaded: 2026t0-26T07:24Z
Check the source to verify that this is the currentversion before use.

Code 1434 is the 1006 requirements code (5.4).

Code 1435 is the 1006 except requirements code (5.4).

Code 1436 and an "X", entered on the SRS, will specify no evidence of physical damage. This code is mandatory when requirements after the random vibration test are to be detailed.

Code 3261 and an "X", entered on the SRS, will specify that there shall be no leakage as detected by the continuous escaping of bubbles.

Code 3262 and a value, entered on the SRS, will specify the maximum attenuation in db.

Codes 3263 and 3264 and values, entered on the SRS, will specify the attenuation range in db.

Code 3265 and a value, entered on the SRS, will specify the maximum attenuation change in db that exhibits the stability of attenuation.

Code 3266 and a value, entered on the SRS, will specify the maximum insertion loss in db.

Code 3267 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms.

Code 3268 and a value, entered on the SRS, will specify the maximum resetability error in plus or minus db.

Code 3269 and a numbers entered on the SRS, will specify the maximum YSWR.

Code 3270 and an "X", entered on the SRS, will specify that the part shall be within tolerance and shall meet design or performance characteristics.

5.59 Voltage Standing Wave Ratio

Code 2018 is the 1006 test code (5.4).

Code 2019 is the 1006 except test code (5.4).

Code 2020 and a document designation, entered on the SRS, will, specify that testing shall be performed in accordance with the methods and conditions specified in the document (5.7).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 2021 and an "X", entered on the SRS, will specify that the test shall be conducted in accordance with the VSWR Test Table III.

Code 2022 and a number, entered on the SRS, will specify the reflection coefficient indicated on the ratio meter during the measurement of VSWR by a reflectometer system.

Codes 2023 and 2024 and values, entered on the SRS, will specify the test frequency in gigahertz during measurement of VSWR.

Code 2025 is the 1006 requirements code (5.4).

Code 2026 is the 1006 except requirements code (5.4).

Codes 2027 through 2030 and Code 3150 are to be used for attenuators only.

Code 2027 and a number, entered on the SRS, will specify the maximum VSWR as determined by the use of Table III.

Code 2028 and a number, entered on the SRS, will specify the maximum VSWR at minimum attenuation.

Code 2029 and a number, entered on the SRS, will specify the maximum VSWR at 50 percent of the rated attenuation range.

Code 2030 and a number, entered on the SRS, will specify the maximum VSWR at maximum attenuation.

Code 3150 and a number, entered on the SRS, will specify the maximum VSWR as measured by the reflectometer system with a reflection coefficient "P".

Codes 3151 and 3152 are to be used for adapters only.

Code 3151 and a number, entered on the SRS, will specify the maximum VSWR over the specified frequency band.

Code 3152 and a number, entered on the SRS, will specify the maximum VSWR at 50 percent of the specified frequency band.

Codes 3154 and 3155 are to be used for couplers only.

Code 3153 and a number, entered on the SRS, will specify the maximum VSWR at the input cf the primary line.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 3154 and a number, entered on the SRS, will specify the maximum VSWR at the secondary line waveguide output.

Code 3155 and a number, entered on the SRS, will specify the maximum VSWR at the secondary line coaxial output. Code 3154 is not to be used with Code 3155.

Code 3156 is for switches only.

Code 3156 and a number, entered on the SRS, will specify the maximum VSWR over the specified frequency band.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
1.3	Enter on the SRS, requirements from MIL-STD-35.	
5.6	Figures	
	Micrwave/Waveguide Components (figure number)	1009
5.9	ADAPTERS, ATTENUATORS, COUPLERS, SWITCHES	
5.9.1	*Frequency Range	
	Lower limit (GHz)	1588
	Lower limit (de)	1589
	*Upper limit (GHz)	1590
5.9.2	*Power (Attenuators and Switches)	
	*Average rating (watts)	1595
	*Peak rating (kilowatts)	1596
	Average power at ____ volts peak	1597
5.9.3	Temperature Range	
	Operating	
	Minimum Temperature (deg C)	5068
	Maximum Temperature (deg C)	5069
	Nonoperating	
	Minimum Temperature (deg C)	5070
	Maximum Temperature (deg C)	5071

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.9.4	Impedance (Ohms)	
	Input	1593
	Output	1594
5.9.5	Voltage Standing Wave Ratio	
	(Enter on SRS applicable codes and values from Table III)	
5.9.6	Classification	
	(Select one)	
	Class number _____.	1562
	Type number _____.	1563
5.9.7	Waveguide	
	Cross-section dimensions	
	Height (inches)	1564
	Width (inches)	1565
	*Dimensions (Select one)	
	Inside	1591
	Outside	1592
	RG - _____ (equivalent type number)	1566
	WR - _____ (equivalent type number)	1567

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST ML)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.9.8		
	UG - type number	
	Input flange	1569
	Output flange	1570
	Mating characteristics per specification _____.	1568
	(Select one)	
	Type	
	Choke	1571
	Cover	1572
	Contact	1573
	Connection method	
	(Select one)	
	Clamp ring	1574
	Studs	1575
	Threaded holes	1576
	Connection facilities	
	Quantity of devices	1577

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.9.9	Connectors	
	I Input	
	Type number	1578
	Specification	1579
	output	
	Type number	1580
	Specification	1581
5.9.10	Weight	
	(Select one and enter value)	
	Ounces	1585
	Pounds	1586
	Grams	1587
5.10	ADAPTERS	
5.70.1	*Coaxial End Coupling	
	*Equivalent to UG -	1606
	*Mates with UG - _____	1607
5.11	ATTENUATORS	
5. 11.1	Eliminate Backlash	1631

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.11.2	Dial Readout	
	(Enter on SRS applicable codes and values from Table I)	Table
5.11.3	Attenuation Accuracy	
	(Enter on SRS applicable codes and values from Table II)	"able I
5.11.4	Phase Shift	
	Attenuation settings	
	Below _____ db	1627
	*_ . degree(s) maximum	1626
	Range	
	From ____ minimum db	1629
	To ._ maximum db	1630
	*_____ degree(s) maximum	1628
5.11.5	bunting Method	
	(Select one)	
	Bracket	1632
	Cl amp	1633
	Connector (coaxial)	1634
	Flange w/mounting holes (nonwaveguide)	1635

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.11.5 (Cont)	Mounting Method (Cont)	
	Free standing base	1636
	Rack	1637
	Threaded holes	1638
	Unthreaded holes	1639
	Threaded stud	1640
5.12	DIRECTIONAL COUPLERS	
5.12.1	*Directional Type	
	(Select one)	
	Bidirectional	1648
	Unidirectional	1649
5.12.2	Connectors (Secondary Line)	
	Type number	1672
	Specification	1673
5.12.3	Transmission Line	
	RG - _____ (equivalent)	1650

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.12.4	Power Coupling	
	Transmitted maximum (db)	1651
	Cross-coupling maximum (db)	1652
	Reflected maximum (db)	1653
5.12.5	*Power Rating	
	*Primary average (watts)	1655
	*Primary peak (k lowatts)	1656
	'Secondary average reflected (watts)	1657
5.12.6	Isolation	
	Minimum (db)	1658
5.12.7	Frequency Sensitivity	
	(± db)	1659
5.12.8	Tracking	
	Maximum (db)	1660
5.12.9	Amplitude Equality	
	output to output (+ _____ db)	1661

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIRMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.12.10	Phase Equality	
	(Select one)	
	Output to output (± _____ degrees)	1662
	Output to output (± _____ radians)	1663
5.12.11	Mounting Method	
	(Select one)	
	Any acceptable	1664
	Bolts	1665
	Brackets	1666
	Clamps	1667
	Clips	1668
	Connectors	1669
	Screws	1670
	Studs	1671
5.13	SWITCHES	
5.13.1	*Actuation	
	(Select one)	
	Manual	1675
	By motor	1676
	By solenoid	1677

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.13.2	Switch Type	
	(Select transfer or nontransfer type)	
	Transfer	
	*_____ pole	1678
	*_____ throw	1679
	Nontransfer	
	*_____ pole	1680
	*_____ throw	1681
5.13.3	*Coupling	
	(Indicate number of positions provided)	1682
5.13.4	Mounting Patterns	
	Pattern number	684
	Inserts required for tapped hole switches	685
5.13.5	Return Mechanism Type (Select one)	
	Fail-safe	687
	Latching	688
5.13.6	Interlock Circuitry Required	689

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.13.7	Receptacle Pressure	
	(Pressurization required)	1690
5.13.8	Holding Current	
	(Amperes maximum)	1691
5.14	Altitude	
	(Select one test method)	
	Test per 1006 document	3020
	Test per 1006 document except .	3021
	Test per MIL-A-46853	3022
	Test as follows:	
	Test pressure equivalent altitude	
	(Select one)	
	Feet	3023
	Metres	3024
	*Duration of exposure (minutes)	3025
	Measurements after the test shall be in accordance with the requirements selected.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.14 (Cont)	Altitude (Cont)	
	(Select one requirement)	
	Requirement(s) per 1006 document	3027
	Requirement(s) per 1006 document except _____.	3028
	Requirement(s) as follows:	
	No degradation of performance	3029
	Test performance requirements	
	(Select one or more requirements)	
	Attenuation maximum (db)	3031
	Insertion loss maximum (db)	3032
	VSWR (maximum)	3033
5.15	Attenuation (Fixed and Variable Attenuators)	
	(Select one test method)	
	Test per 1006 document	1698
	Test per 1006 document except _____.	1699
	Test per MIL-A-3933	1700
	Attenuation Accuracy	Table II

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.15 (Cont)	Attenuation (Fixed and Variable Attenuators)(Cont)	
	Test per MIL-A-24215	1701
	Attenuation shall be measured at minimum, 50 percent, and maximum attenuation.	1703
	Test per MIL-A-46853	1702
	Test pad number one attenuation value (db)	1704
	Test pad number two attenuation value (db)	1705
	Impedance value of test cables (ohms)	1706
	(Select one requirement)	
	Requirement(s) per 1006 document	1707
	Requirement(s) per 1006 document except _____.	1708
	Requirements as follows:	
	The measured attenuation shall be	
	_____ maximum db	1709
	_____ minimum db	1710
	Frequency band of	
	_____ minimum GHz	1711
	*_____ maximum GHz	1712

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.15 (Cont)	Attenuation (Fixed and Variable Attenuators (Cont)	
	Accuracy of attenuation	
	(± _____ db/db)	1713
	*Over _____ db level plus insertion loss	1714
	(± _____ db)	1715
5.16	Attenuation Range (Variable Attenuators)	
	(Select one test method)	
	Test per 1006 document	1717
	Test per 1006 document except _____.	1718
	Test per MIL-A-38728	1719
	(Select one requirement)	
	Requirement(s) per 1006 document	1720
	Requirement(s) per 1006 document except _____.	1721
	Requirement(s) as follows:	
	Attenuation range (above insertion loss)	
	from _____ minimum db	1722
	to _____ maximum db	1723

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.17	Attenuation Stability (Fixed Attenuators)	
	(Select one test method)	
	Test per 1006 document	1726
	Test per 1006 document except _____.	1727
	Test per MIL-A-3933	1728
	Test as follows:	
	Test to be performed (Select one or more)	
	Moisture resistance	3140
	Peak power	3141
	Shock, specified impulse	3142
	Temperature change	3143
	Thermal shock	3144
	Vibration, low frequency	3145
	(Select one requirement)	
	Requirement(s) per 1006 document	1730
	Requirement(s) per 1006 document except _____.	1731
	Requirement(s) as follows:	
	No evidence of mechanical damage	1732
	Attenuation change (maximum db)	1733

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (ML)

REF PARA	CHARACTERISTIC NAME	CODE
5.18	Connector Wear Resistance (Fixed Attenuators)	
	(Select one test method)	
	Test per 1006 document	1736
	Test per 1006 document except . .	1737
	Test per MIL-A-3933	1738
	*Number of cycles of connection and disconnection	1739
	(Select one requirement)	
	Requirement(s) per 1006 document	1740
	Requirement(s) per 1006 document except .	1741
	Requirement(s) as follows:	
	No evidence of excessive removal of material or lubrication.	1742
5.19	Coupling Factor (Couplers)	
	(Select one test method)	
	Test per 1006 document	1745
	Test per 1006 document except .	1746
	Test per MIL-C-15370	1747

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.19 (Cont)	Coupling Factor (Couplers) (Cont)	
	Test as follows:	
	Coupling shall be determined at mid-frequency in the range of	
	*__ __ minimum GHz	1748
	*_____ maximum GHz	1749
	(Select one requirement)	
	Requirement(s) per 1006 document	1750
	Requirement(s) per 1006 document except	1751
	Requirement(s) as follows:	
	Coupling factor (db)	1752
	*+ . __ db	1753
5.20	Coupling Variation (Couplers)	
	(Select one test method)	
	Test per 1006 document	757
	Test per 1006 document except _	1758
	Test per MIL-C-15370	1759

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.20 (Cont)	Coupling Variation (Couplers) (Cont)	
	Test as follows:	
	Test frequency range	
	* _____ minimum GHz	1760
	* _____ maximum GHz	1761
	(Select one requirement)	
	Requirement(s) per 1006 document	1762
	Requirement(s) per 1006 document except _____	1763
	Requirement(s) as follows:	
	Coupling variation shall be _____ maximum db	1764
5.21	Dial Calibration (Variable Attenuators)	
	(Select one test method)	
	Test per 1006 document	1767
	Test per 1006 document except _____	1768
	Test per MIL-A-24215	1769
	Check dial calibration at	
	* _____ GHz and at	1770
	* _____ maximum db attenuation	1771

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (ML)

REF PARA	CHARACTERISTIC NAME	CODE
5.21 (Cont)	Dial Calibration (Variable Attenuators) (Cont)	
	(Select one requirement)	
	Requirement(s) per 1006 document	1772
	Requirement per 1006 document except	1773
	Requirement(s) as follows:	
	(Select one)	
	Dial accuracy	
	+ . . _ db	1774
	Dial accuracy	
	+ _ _ _ percent	1775
5.22	Dielectric Withstanding Voltage (Reduced Barometrlc Pressure	
	(Select one test method)	
	Test per 1006 document	4833
	Test per 1006 document except .	4884
	Test per MIL-STD-202, Method 301	6300
	MIL-STD-202, Method 105 *Test condition letter	4886

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.22 (Cont)	Dielectric Withstanding Voltage (Reduced Barometric Pressure) (Cont)	
	Test as follows:	
	Mounting method (Select one)	
	Any suitable method	3277
	The normal method	3278
	In accordance with (5.7)	6280
	Rate of test voltage application	
	(Select one)	
	Instantaneous	3280
	_ _ maximum volts per second	3281
	Test voltage (Select one)	
	_ _(volts dc)	4885
	_____ (volts ac)	4849
	Duration of test voltage (seconds)	4891
	Points of test voltage application	
	Between mutually insulated parts	6292
	Between all insulated parts and ground	6293
	Between current carrying parts and case	6294

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.22 (Cont)	Dielectric Withstanding Voltage (Reduced Barometric Pressure +	
	Method of connection of test Voltage in accordance with (5.7)	4827
	Maximum surge current (milliamps)	6310
	(Select one requirement)	
	Requirement(s) per 1006 document	4907
	Requirement(s) per 1006 document except	4908
	Requirement as follows:	
	No arcing, flashover, breakdown of insulation, or evidence of damage.	4996
	Leakage current (Select one)	
	_ . . . _ maximum milliamperes	4894
	_ _ maximum microamperes	4896
	The part shall remain within tolerance	4901
	No degradation of performance	4902
5.23	~~Dielectric Withstanding~~ Voltage (~~Sea Level~~)[1]	
	(Select one test method	
	Test per 1006 document	4860
	Test per 1006 document _.	4861
	Test per MIL-STD-202 Method 301	4862

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.23 (Cont)	Dielectric Withstanding Voltage (Sea Level) (Cont)	
	Test as follows:	
	Test voltage (Select one)	
	(volts dc)	4854
	(volts ac)	4855
	Duration of test voltage (seconds)	4867
	Rate of test voltage application (Select one)	
	Instantaneous	3275
	_____ maximum volts per second	3276
	Points of test voltage application	
	Between mutually insulated parts	4844
	Between all insulated parts and ground	4845
	Between current carrying parts and case	4846
	Method of connections of test voltage in accordance with (5.7)	6267
	Maximum surge current (milliamps)	4897

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.23 (Cont)	Dielectric Withstanding Voltage (Sea Level) (Cont)	
	(Select one requirement)	
	Requirement(s) per 1006 document	4873
	Requirement(s) per 1006 document except _	4874
	Requirement(s) as follows:	
	No arcing, flashover, breakdown of insulation, or evidence of damage.	4856
	Leakage current (Select one)	
	_ _ _ maximum milliamps	4875
	_ _ _ maximum microarnps	4817
	The part shall remain within tolerance	4847
	No degradation of performance	4826
5.24	Effective Directiviy(Couplers)	
	(Select one test method)	
	Test per 1006 document	1780
	Test per 1006 document except _	1781
	Test per MIL-C-15370	1782

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.24 (Cont)	Effective Directivity (Couplers) (Cont)	
	Test as follows:	
	Test frequency range	
	_____ GHz to	1783
	_____ GHz	1784
	An alternate test shall be conducted.	1785
	(Select one requirement)	
	Requirement(s) per 1006 document	1786
	Requirement per 1006 document except .	1787
	Requirement(s) as follows:	
	Effective directivity shall be _____ minimum db	1788
5.25	Endurance (Switches)	
	(Select one test method)	
	Test per 1006 document	1791
	Test per 1006 document except .	1792
	Test per MIL-S-55041	1793

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.25 (Cont)	Endurance (Switches) (Cont)	
	*Coupling cycles (indicate number)	1794
	*Coupling cycles per minute _____.	1795
	VSWR shall be measured after cycling.	1796
	Insertion loss shall be measured after cycling.	1797
	(Select one requirement)	
	Requirement(s) per 1006 document	1798
	Requirement(s) per 1006 document except _____.	1799
	Requirement(s) as follows:	
	VSWR (maximum)	1800
	Insertion loss (maximum db)	1801
5.26	Frequency Sensitivity (Variable Attenuators)	
	(Select one test method)	
	Test per 1006 document	1804
	Test per 1006 document except _____.	1805
	Test per MIL-A-24215	1806

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.26 (Cont)	Frequency Sensitivity (Variable Attenuators) (Cont)	
	(Select one requirement)	
	Requirement(s) per 1006 document	1807
	Requirement(s) per 1006 document except _____.	1808
	Requirement(s) as follows:	
	Maximum variation in attenuation (± db)	1809
5.27	Fungus	
	(Select one test method)	
	Test per 1006 document	4753
	Test per 1006 document except _____.	4754
	Test per MIL-STD-810 Method 508	4755
	Test as follows:	
	Specimen operation (Select one if required)	
	During exposure	4763
	After exposure	4757
	Duration of test (days) (if other than 28 days)	4756

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.27 (Cont)	Fungus (Cont)	
	(Select one requirement)	
	Requirement(s) per 1006 document	4759
	Requirement(s) per 1006 document except ____.	4760
	Requirement(s) as follows:	
	Supplier's certification of compliance may be accepted in lieu of testing.	4761
	The specimen shall show no evidence of fungus by testing.	4762
5.28	Gage (Adapters)	
	(Select one test method)	
	Test per 1006 document	1813
	Test per 1006 document except ____.	1814
	Test per MIL-A-22641	1815
	Test as follows:	
	*Complete ____ mating cycles (Class 2 or Class 3 adapter)	1816
	Mating characteristics (Class 1, 4, and 5 adapters)	1817
	Oversize test pin diameter (thousandths of an inch)	1818
	*Plus ____ (ten thousandths of an inch)	1819

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.28 (Cont)	Gage (Adapters) (Cont)	
	*Insertion depth minimum (thousandths of an inch)	1820
	*Number of insertions	1821
	Maximum diameter test pin (thousandths of an inch)	1822
	*Plus _____ (ten thousandths of an inch)	1823
	*Insertion force maximum (pounds) "	1824
	*Insertion depth minimum (thousandths of an inch)	1825
	Minimum test pin diameter of _____ thousandths of an inch	1826
	*Minus _____ (ten thousandths of an inch)	1827
	*Insertion of depth minimum (thousandths of an inch)	1828
	*Withdrawal force [ounce(s)] minimum	1829
	(Select one requirement)	
	Requirement(s) per 1006 document	1830
	Requirement(s) per 1006 document except____.	1831
	Requirement(s) as follows:	
	The adapter shall meet the requirements of the gage test.	1832

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.29	Heat Aging (Switches)	
	(Select one test method)	
	Test per 1006 document	1842
	Test per 1006 document except _____.	1843
	Test per MIL-S-55041	1844
	Oven temperature raised to	
	_____ (deg C)	1845
	*± _____ (deg C)	1846
	Exposure duration	
	*_____ (hours)	1847
	Oven temperature lowered to	
	_____ (deg C)	1848
	*± _____ (deg C)	1849
	(Select one requirement)	
	Requirement(s) per 1006 document	1850
	Requirement(s) per 1006 document except ___.	1851
	Requirement(s) as follows:	
	The switch shall show no evidence of voltage breakdown	1852
	Maximum insertion loss (db)	1853

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.30	High Temperature	
	(Select one test method)	
	Test per 1006 document	3040
	Test per 1006 document except _____.	3041
	Test per MIL-STD-810 Method 501	
	*Procedure number _____.	3042
	Test as follows:	
	Highest operating temperature (deg C)	3044
	*Duration of specimen operation (hour)	3043
	Measurements during and after the test shall be in accordance with the requirements selected.	
	(Select one requirement)	
	Requirement(s) per 1006 document	3047
	Requirement(s) per 1006 document except ____.	3048
	Requirement(s) as follows:	
	No evidence of damage	3049
	Test performance requirements (Select one or more requirements)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.30 (Cont)	High Temperature (Cont)	
	Maximum attenuation (db)	3051
	Attenuation range (db to db)	
	*_____ minimum db	3052
	*to _____ maximum db	3053
	Maximum insertion loss (db)	3054
	Resetability error (± maximum db)	3055
	Maximum VSWR	3056
	The part shall be within tolerance and shall meet design or performance characteristics.	3057
5.31	Humidity	
	(Select one test method)	
	Test per 1006 document	4787
	Test per 1006 document except _____.	4788
	Test per MIL-STD-202 Method 103	4853
	*Test condition letter _____.	4890
	Test as follows:	
	Polarizing voltage (dc)	4793

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.31 (Cont)	Humidity (Cont)	
	Polarizing voltage points of application (Terminal designation)	
	Between mutually insulated parts	4969
	Between all insulated parts and ground	4970
	Between current carrying parts and case	4971
	Duration of polarizing voltage application (hours)	4790
	Duration of humidity test (hours)	4816
	Measurements during and after the test shall be in accordance with the requirements selected.	
	(Select one requirement)	
	Requirement(s) per 1006 document	4797
	Requirement(s) per 1006 document except _____.	4798
	Requirement(s) as follows:	
	No evidence of corrosion or physical damage	4799
	Test performance requirements (Select one or more requirements)	
	Maximum attenuation (db)	3160

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.31 (Cont)	Humidity (Cont)	
	Attenuation range deviation	
	db to db deviation at high humidity	
	*_____ maximum percent	3161
	db to db deviation after drying	
	*_____ maximum percent	3162
	Maximum insertion loss (db)	3163
	Insulation resistance	
	At high humidity minimum (megohms)	3164
	After drying minimum (megohms)	3165
	Maximum VSWR	3166
	VSWR deviation	
	At high humidity	
	*_____ percent maximum	3167
	After drying	
	*_____ percent maximum	3168
	The part shall remain within tolerance	4791
	No degradation of performance	4815

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.32	Insertion Loss	
	(Select one test method)	
	Test per 1006 document	1856
	Test per 1006 document except _____.	1857
	Test per (see 5.7)	1858
	Test as follows:	
	Measurement by substitution technique (Select one)	
	Using radio frequency	1859
	Using audio frequency	1860
	Using intermediate frequency	1861
	Final indication of reflection co-efficient.	
	_____ maximum (on ratio meter)	1862
	(Select one requirement)	
	Requirement(s) per 1006 document	1863
	Requirement(s) per 1006 document except ____.	1864
	Requirement(s) as follows:	

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.32 (Cont)	Insertion Loss (Cont)	
	Attenuation (at minimum attenuation position across the operating frequency range)	
	_____ maximum db	1865
	Insertion loss	
	_____ maximum db	1866
	*from _____ GHz	1867
	*to _____ GHz	1868
5.33	Insulation Resistance	
	(Select one test method)	
	Test per 1006 document	1370
	Test per 1006 document except _____.	1371
	Test per MIL-STD-202, Method 302	1511
	*Condition (Select one)	
	Test condition letter	1378
	Test potential (volts dc)	1373
	Electrification time, if other than 2 minutes (seconds)	1376

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.33 (Cont)	Insulation Resistance (Cont)	
	Maximum measurement error at required value if other than 10 (percent)	1377
	Measure between mutually insulated points	1522
	Measure between insulated points and ground	1523
	Special preparations or conditions in accordance with (5.7)	1520
	First test temperature (deg C)	1372
	Second test temperature (deg C)	1381
	Temperature tolerance (± deg C)	1383
	(Select one requirement)	
	Requirement(s) per 1006 document	1379
	Requirement(s) per 1006 document except _____.	1380
	Requirement(s) as follows:	
	Minimum insulation resistance, first or only test (megohms)	1384
	Minimum insulation resistance, second test (megohms)	1387
	No evidence of physical damage	1407
	No degradation of performance	1408

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.34	Isolation (Switches)	
	(Select one test method)	
	Test per 1006 document	1870
	Test per 1006 document except _____.	1871
	Test per MIL-S-55041	1872
	Set step attenuator to ____ minimum db	1873
	Frequency band swept between	
	*_____ GHz (minimum)	1874
	*_____ GHz (maximum)	1875
	Crosstalk reference frequency (GHz)	1876
	(Select one requirement)	
	Requirement(s) per 1006 document)	1877
	Requirement(s) per 1006 document except _____.	1878
	Requirement(s) as follows:	
	Power loss shall not be less than _____ db.	1879
5.35	Low Temperature	
	(Select one test method)	
	Test per 1006 document	3063

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.35 (Cont)	Low Temperature (Cont)	
	Test per 1006 document except _____.	3064
	Test per MIL-STD-810 Method 502	3065
	Test as follows:	
	Storage temperature (minus deg C)	3066
	*Duration of maintained temperature [hour(s)]	3067
	Lowest operating temperature (deg C)	3069
	*Duration of specimen operation [hour(s)]	3068
	Measurements during and after the test shall be in accordance with the requirements selected.	
	(Select one requirement)	
	Requirement(s) per 1006 document	3070
	Requirement(s) per 1006 document except _____.	3071
	Requirement(s) as follows:	
	No damage and capable of continuous and intermittent operation.	3072

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.35 (Cont)	Low Temperature (Cont)	
	Test performance requirements (Select one or more requirements)	
	Maximum attenuation (db)	3074
	Attenuation range (db to db)	
	*_____ db	3075
	*to _____ db	3076
	Maximum insertion loss (db)	3077
	Maximum resetability error (± db)	3078
	Maximum VSWR	3079
	The part shall be within tolerance and shall meet design or performance characteristics.	3080
5.36	Moisture Resistance	
	(Select one test method)	
	Test per 1006 document	1390
	Test per 1006 document except _____.	1391
	Test per MIL-STD-202 Method 106	1397

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.36 (Cont)	Moisture Resistance (Cont)	
	Test as follows:	
	Loading voltage	
	dc	4981
	ac	4980
	Polarization voltage (volts dc) (if other than 100 volts dc)	1395
	Step 7A not applicable	4985
	Step 7B not applicable	4986
	(Select one requirement)	
	Requirement(s) per 1006 document	1399
	Requirement(s) per 1006 document except ____.	1400
	Requirement(s) as follows:	
	*No evidence of corrosion or physical damage	1407
	Test performance requirements (Select one or more requirements)	
	Maximum attenuation (db)	3170
	Attenuation range	
	*_____ db to	3171
	*_____ db	3172

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.36 (Cont)	Moisture Resistance (Cont)	
	Attenuation stability	3173
	Maximum insertion loss (db)	3174
	Minimum insulation resistance (megohms)	3175
	Maximum VSWR	3176
	The part shall remain within tolerance	1398
	No degradation of performance	1392
5.37	Operating Voltage (Switches)	
	(Select one test method)	
	Test per 1006 document	1882
	Test per 1006 document except _____.	1883
	Test per MIL-S-55041	1884
	(Select one requirement)	
	Requirement(s) per 1006 document	1885
	Requirement(s) per 1006 document except _____.	1886
	Requirement(s) as follows:	
	The switch shall rotate, slide or move axially from the nonenergized position upon the application of _____ volts.	1887

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.37 (Cont)	Operating Voltage (Switches) (Cont)	
	*Nature of the voltage (Select one)	
	ac	1888
	dc	1889
5.38	Peak Power (Fixed and Variable Attenuators)	
	(Select one test method)	
	Test per 1006 document	1891
	Test per 1006 document except _____.	1892
	Test per MIL-A-3933	1893
	Test per MIL-A-24215	1894
	Applied power (kilowatts)	1895
	*Duration of application [hour(s)]	1896
	Applied power (kilowatts)	1897
	*Adjusted maximum frequency (GHz)	1898
	Measurements after test	
	Attenuation	1899
	Attenuation change	1900
	Measurements during test	
	Dial calibration	1901
	VSWR	1902

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.38 (Cont)	Peak Power (Fixed and Variable Attenuators) (Cont)	
	(Select one requirement)	
	Requirement(s) per 1006 document	1903
	Requirement(s) per 1006 document except ____.	1904
	Requirement(s) as follows:	
	VSWR _____ maximum	1905
	Change in attenuation maximum (db)	1906
	Dial calibration requirements shall be met.	1907
	No evidence of mechanical damage	1908
5.39	Power Dissipation (Couplers)	
	(Select one test method)	
	Test per 1006 document	1911
	Test per 1006 document except _____.	1912
	Test per MIL-C-15370	1913
	Test as follows:	
	Secondary line power dissipation determined between	
	*_____ GHz and	1914
	*_____ GHz	1915

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.39 (Cont)	Power Dissipation (Couplers) (Cont)	
	Primary line CW power rating (watts)	1916
	Secondary line VSWR measurement at mid frequency of the range	
	*_____ GHz (mid frequency)	1917
	The alternate test shall be conducted	1918
	(Select one requirement)	
	Requirement(s) per 1006 document	1919
	Requirement(s) per 1006 document except ____.	1920
	Requirement(s) as follows:	
	Secondary line VSWR shall not exceed ___.	1921
5.40	Power Handling Capacity (Switches)	
	(Select one test method)	
	Test per 1006 document	1925
	Test per 1006 document except _____.	1926
	Test per MIL-S-55041	1927
	Test shall be conducted with	
	*_____ KW peak power	1928
	*_____ watts average power	1929
	*_____ psig line pressure	1930

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.40 (Cont)	Power Handling Capacity (Switches) (Cont)	
	(Select one requirement)	
	Requirement(s) per 1006 document	1931
	Requirement(s) per 1006 document except _____.	1932
	Requirement(s) as follows:	
	There shall be no voltage breakdown nor evidence of deterioration such as arcing, high current surges, and excessive release of moisture.	1933
	Temperature of the switch shall not exceed _____ degrees C.	1934
5.41	Radio Noise	
	(Select one test method)	
	Test per 1006 document	1936
	Test per 1006 document except _____.	1937
	Test per MIL-STD-461 and 462	1938
	Test as follows:	
	*Test method number ___ ___.	1939
	*Equipment class number _____.	1940
	Appendix Table A - _____.	1941

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.41 (Cont)	Radio Noise (Cont)	
	(Select one requirement)	
	Requirement(s) per 1006 document	1942
	Requirement(s) per 1006 document except _____.	1943
	Requirement(s) as follows:	
	Narrow band radiated emission field	
	_____ db above 1 microvolt per metre maximum radiation	1944
	Broadband and pulsed CW radiated emission field	
	_____ db above 1 microvolt per metre per megacycle maximum radiation	1945
5.42	Rain	
	(Select one test method)	
	Test per 1006 document	3086
	Test per 1006 document except _____.	3087
	Test per MIL-STD-810 Method 506	3088
	Test as follows:	
	Simulated rainfall (Select one)	
	_____ inches/hr	3089
	*± _____ inches/hr	3090

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.42 (Cont)	Rain (Cont)	
	Duration of exposure	
	_____ minutes	3091
	_____ hours	3093
	*Chamber temperature (deg C)	3092
	Measurements after the test shall be in accordance with the requirements selected.	
	(Select one requirement)	
	Requirement(s) per 1006 document	3095
	Requirement(s) per 1006 document except _____.	3096
	Requirement(s) as follows:	
	No evidence of deterioration of quality	3097
	Test performance requirements (Select one or more requirements)	
	Maximum attenuation (db)	3099
	Attenuation range	
	*____ db to	3100
	*____ db	3101
	Attenuation stability (db change)	3102

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.42 (Cont)	Rain (Cont)	
	Maximum insertion loss (db)	3103
	Minimum insulation resistance (megohms)	3104
	Maximum VSWR	3105
	The part shall be within tolerance and shall meet design or performance characteristics.	3106
5.43	Release Voltage (Switches)	
	(Select one test method)	
	Test per 1006 document	1946
	Test per 1006 document except _____.	1947
	Test per MIL-S-55041	1948
	(Select one requirement)	
	Requirement(s) per 1006 document	1949
	Requirement(s) per 1006 document except _____.	1950
	Requirement(s) as follows:	
	Upon reduction of the operating voltage to _____ volts, the switch shall rotate, slide or move axially from the energized position to the unenergized position.	1951

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.43 (Cont)	Release Voltage (Switches) (Cont)	
	*Nature of the voltage (Select one)	
	dc	1952
	ac	1953
5.44	Repeatability (Variable Attenuators)	
	(Select one test method)	
	Test per 1006 document	1955
	Test per 1006 document except _____.	1956
	Test per MIL-A-24215	1957
	Test as follows:	
	Attenuation cycles	
	Operate _____ cycles from minimum through maximum attenuation.	1958
	Measurements after the test shall be in accordance with the requirements selected.	
	(Select one requirement)	
	Requirement(s) per 1006 document	1959
	Requirement(s) per 1006 document except _____.	1960

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.44 (Cont)	Repeatability (Variable Attenuators) (Cont)	
	Requirement(s) as follows:	
	After the test, the component shall meet the following performance requirements (Select one or more)	
	Maximum attenuation (db)	1961
	Attenuation range	
	*_____ db to	1962
	*_____ db	1963
	Dial calibration	
	± _____ db	1964
	± _____ percent	1965
	*Frequency (GHz)	1966
	Frequency sensitivity (± db)	1967
	Maximum insertion loss (db)	1968
	Power capability	
	*Maximum power (watts)	1969
	*Maximum VSWR	1970
	*Dial accuracy (± db)	1971
	Temperature coefficient (db/db/deg C)	1972
	Maximum VSWR	1973

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.45	Resetability Error (Variable Attenuators)	
	(Select one test method)	
	Test per 1006 document	1976
	Test per 1006 document except _____.	1977
	Test per MIL-A-38728	1978
	(Select one requirement)	
	Requirement(s) per 1006 document	1979
	Requirement(s) per 1006 document except ____.	1980
	Requirement(s) as follows:	
	The error shall not exceed + or - _____ db at	1981
	*_____ db	1982
5.46	Salt Spray (Corrosion)	
	(Select one test method)	
	Test per 1006 document	4769
	Test per 1006 document except _____.	4770
	Test per MIL-STD-202 Method 101	4771
	*Test condition letter _____.	4772

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.46 (Cont)	Salt Spray (Corrosion) (Cont)	
	Test as follows:	
	Mounting method (Select one)	
	The normal method	4765
	Any suitable method	4766
	In accordance with (5.7)	4773
	Measurements after the test shall be in accordance with the requirements selected.	
	(Select one requirement)	
	Requirement(s) per 1006 document	4877
	Requirement(s) per 1006 document except ____.	4878
	Requirement(s) as follows:	
	There shall be no evidence of corrosion, physical damage or degradation of performance.	4782
	Test performance requirements (Select one or more requirements)	
	Maximum attenuation (db)	3180
	Attenuation stability (db change)	3181
	Maximum insertion loss (db)	3182
	Minimum insulation resistance (megohms)	3183

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.46 (Cont)	Salt Spray (Corrosion) (Cont)	
	Operating voltage (volts dc)	3184
	Power handling capacity	3185
	Switching time (milliseconds)	3186
	Maximum VSWR	3187
5.47	Sand and Dust	
	(Select one test method)	
	Test per 1006 document	4951
	Test per 1006 document except _____.	4952
	Test per MIL-STD-202 Method 110	4960
	Test as follows:	
	Reorient component during exposure	1539
	Operate component during test	
	*Duration of operation and measurement (hours)	6299
	Perform second 6-hour test immediately after temperature stabilization	4955
	Measurements after the test shall be in accordance with the requirements selected.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.4/ (Cont)	Sand and Dust (Cont)	
	(Select one requirement)	
	Requirement(s) per 1006 document	4957
	Requirement(s) per 1006 document except _____.	4958
	Requirement(s) as follows:	
	No evidence of dust penetration	4959
	Test performance requirements (Select one or more requirements)	
	Maximum attenuation (db)	3191
	Maximum insertion loss (db)	3192
	Maximum VSWR	3193
	The part shall be within tolerance and shall meet design or performance characteristics.	3194
5.48	Seal	
	(Select one test method)	
	Test per 1006 document	4733
	Test per 1006 document except _____.	4734
	Test per Method 112 of MIL-STD-202	4732
	*Test condition letter	4737

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.48 (Cont)	Seal (Cont)	
	If test condition letter is A or B	
	Liquid for test	4738
	*Temperature (deg C)	4739
	If test condition letter is C	
	*Test procedure number	4740
	*Leakage rate sensitivity (ATM cc/sec)	4741
	If procedure III in condition C	
	*Applicable gross leak test condition letter	4750
	If procedure IV in condition C	
	*Chamber pressure (Select one)	
	Torr	4751
	Kilopascals	4735
	*Duration of reduced pressure (minutes)	4752
	If test condition letter D or E	
	Any suitable mounting fixture	4743

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.48 (Cont)	Seal (Cont)	
	Measurements after test	
	Insulation resistance	3196
	(Select one requirement)	
	Requirement(s) per 1006 document	4744
	Requirement(s) per 1006 document except _____.	4745
	Requirement(s) as follows:	
	Evidence of leakage (Select one)	
	A/W test method sensitivity	4746
	No visible bubbles indicative of leakage	4748
	Requirements after test	
	Minimum insulation resistance (megohms)	3197
	The part shall remain within tolerance	4758
5.49	Sensitivity of Attenuation (Fixed Attenuators)	
	(Select one test method)	
	Test per 1006 document	1993
	Test per 1006 document except _____.	1994

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.49 (Cont)	Sensitivity of Attenuation (Fixed Attenuators) (Cont)	
	Test per MIL-A-3933	1995
	Attenuation measurements	
	*At minimum frequency (GHz)	1996
	*At maximum frequency (GHz)	1997
	*At full input power (watts)	1998
	*At the reference power (watts)	1999
	*At minimum temperature (deg C)	2000
	*At maximum temperature (deg C)	2001
	(Select one requirement)	
	Requirement(s) per 1006 document	2002
	Requirement(s) per 1006 document except ____.	2003
	Requirement(s) as follows:	
	Change in attenuation shall not exceed ____ db	2004
5.50	Shock (Variable Attenuators)	
	(Select one test method)	
	Test per 1006 document	3200
	Test per 1006 document except ____.	3201
	Test per MIL-A-3872B	3202

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.50 (Cont)	Shock (Variable Attenuators) (Cont)	
	(Select one requirement)	
	Requirement(s) per 1006 document	3203
	Requirement(s) per 1006 document except _____.	3204
	Requirement(s) as follows:	
	No evidence of physical damage.	3205
	Requirements of the Group A tests of MIL-A-38728 shall be met.	3206
	The part shall be within tolerance and shall meet design or performance characteristics.	3207
5.51	Shock, Specified Pulse	
	(Select one test method)	
	Test per 1006 document	1501
	Test per 1006 document except _____.	1502
	Test per MIL-STD-202 Method 213	1500
	*Test condition letter _____	1504
	Mounting method (Select one)	
	In accordance with (5.7)	4684
	Normal method	4685

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.51 (Cont)	Shock, Specified Pulse (Cont)	
	Any suitable method	4686
	Measurements after the test shall be in accordance with the requirements selected.	
	(Select one requirement)	
	Requirement(s) per 1006 document	1507
	Requirement(s) per 1006 document except ____.	1508
	Requirement(s) as follows:	
	*No evidence of mechanical damage	1509
	Test performance requirements (Select one or more requirements)	
	Maximum attenuation (db)	3210
	Attenuation range	
	*____ db	3211
	*to ____ db	3212
	Attenuation stability (db change)	3213
	Maximum insertion loss (db)	3214
	Minimum insulation resistance (megohms)	3215

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.51 (Cont)	Shock, Specified Pulse (Cont)	
	Maximum resetability error (± db)	3216
	Maximum VSWR	3217
	The part shall be within tolerance and shall meet design or performance characteristics.	3218
5.52	Switching Time (Switches)	
	(Select one test method)	
	Test per 1006 document	1985
	Test per 1006 document except ____.	1986
	Test per MIL-S-55041	1987
	(Select one requirement)	
	Requirement(s) per 1006 document	1988
	Requirement(s) per 1006 document except _____.	1989
	Requirement(s) as follows:	
	Time between energized and unenergized positions shall not exceed _____ milliseconds.	1990
5.53	Temperature/Altitude	
	(Select one test method)	
	Test per 1006 document	3109

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.53 (Cont)	Temperature/Altitude (Cont)	
	Test per 1006 document except ____.	3110
	Test per MIL-T-5422	3111
	Test as follows:	
	Measurements during and after the test shall be in accordance with the requirements selected.	
	(Select one requirement)	
	Requirement(s) per 1006 document	3112
	Requirement(s) per 1006 document except ____.	3113
	Requirement(s) as follows:	
	No evidence of voltage breakdown	3114
	Performance requirements (Select one or more requirements)	
	After test	
	Maximum attenuation (db)	3115
	Maximum insertion loss (db)	3116
	Maximum VSWR	3117
	During test	
	Power handling capacity	3118

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.53 (Cont)	Temperature/Altitude (Cont)	
	The part shall be within tolerance and shall meet design or performance characteristics.	3119
5.54	Temperature Coefficient (Variable Attenuators)	
	(Select one test method)	
	Test per 1006 document	2007
	Test per 1006 document except _____.	2008
	Test per MIL-STD-202, Method 107	
	*Test condition letter	2009
	Measure temperature coefficient at each setting for step type.	2010
	Measure temperature coefficient at minimum and maximum setting for continuously variable type.	2011
	(Select one requirement)	
	Requirement(s) per 1006 document	2012
	Requirement(s) per 1006 document except _____.	2013
	Requirement(s) as follows:	
	The maximum temperature coefficient shall be _____ db/db/deg C.	2014

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.55	Thermal Shock	
	(Select one test method)	
	Test per 1006 document	4712
	Test per 1006 document except _____.	4713
	Test per MIL-STD-202 Method 107	4714
	*Test condition letter _____.	4715
	Number of cycles	4704
	Special mounting shall be in accordance with (5.7)	4719
	Measurements after the test shall be in accordance with the requirements selected.	
	(Select one requirement)	
	Requirement(s) per 1006 document	4720
	Requirement(s) per 1006 document except _____.	4722
	Requirement(s) as follows:	
	*No evidence of mechanical damage	4723
	Test performance requirements (Select one or more requirements)	
	Maximum attenuation (db)	3220

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.55 (Cont)	Thermal Shock (Cont)	
	Attenuation range	
	*_____ db	3221
	*to _____ db	3222
	Attenuation stability (db change)	3223
	Dial accuracy (Select one)	
	± _____ db	3224
	*at _____ GHz	3225
	± _____ percent	3226
	*at _____ GHz	3227
	Maximum insertion loss (db)	3228
	Minimum insulation resistance (megohms)	3229
	Power handling capacity	3230
	Maximum Resetability error (± db)	3231
	Maximum VSWR	3232
	The part shall be within tolerance and shall meet design or performance characteristics.	3233

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.56	Vibration, High Frequency	
	(Select one test method)	
	Test per 1006 document	1445
	Test per 1006 document except ____.	1446
	Test per MIL-STD-202 Method 204	1447
	*Test condition letter	1448
	Method of mounting	
	(Select one)	
	Any suitable mounting method	4709
	Normal means	4708
	Mount in accordance with (5.7)	4707
	Method of determining mechanical resonance	
	(Select one)	
	Visually by means of a strobotac	1533
	Electrical output indicators	1534

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.56 (Cont)	Vibration, High Frequency (Cont)	
	Monitoring during test per MIL-STD-202, Method 310.	
	*Test circuit number	1442
	*Test condition letter	1444
	Measurements after the test shall be in accordance with requirements selected.	
	Perform seal test after vibration	3243
	(Select one requirement)	
	Requirement(s) per 1006 document	1454
	Requirement(s) per 1006 document except _____.	1455
	Requirement(s) as follows:	
	*No evidence of physical damage	1456
	No leakage as detected by escaping bubbles	3244
	Test performance requirements (Select one or more requirements)	
	Maximum attenuation (db)	3235
	Attenuation range	
	*_____ db	3236
	*to _____ db	3237

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.56 (Cont)	Vibration, High Frequency (Cont)	
	Attenuation stability (db change)	3238
	Maximum insertion loss (db)	3239
	Minimum insulation resistance (megohms)	3240
	Maximum resetability error (± db)	3241
	Maximum VSWR	3242
	The part shall remain within tolerance	1480
5.57	Vibration, Low Frequency	
	(Select one test method)	
	Test per 1006 document	1465
	Test per 1006 document except _____.	1466
	Test per MIL-STD-202 Method 201	1467
	Test per MIL-A-38728	1468
	Test as follows:	
	Duration of vibration in each axis (Select one)	
	_____ minutes	4973
	_____ hours	1470

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.57 (Cont)	Vibration, Low Frequency (Cont)	
	Monitoring during test per Method 310, MIL-STD-202	
	*Test circuit letter	1491
	*Test condition letter	1492
	Mounting method (Select one)	
	Any suitable method	4731
	Normal method	4730
	In accordance with (5.7)	4729
	Direction of motion	
	On center line of most sensitive axis	4979
	90 degrees from center line of most sensitive axis	4978
	Direction in accordance with (5.7)	4977
	Electrical load (ohms)	1472
	Pressurization test after vibration test	3245
	Total displacement (inches)	3246
	*at _____ GHz and	3247
	*at _____ GHz	3248

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.57 (Cont)	Vibration, Low Frequency (Cont)	
	Measurements after the test shall be in accordance with the requirements selected.	
	(Select one requirement)	
	Requirement(s) per 1006 document	1474
	Requirement(s) per 1006 document except ____.	1475
	Requirement(s) as follows:	
	*No evidence of physical damage	1476
	No leakage as detected by escaping bubbles.	3250
	Test performance requirements (Select one or more requirements)	
	Maximum attenuation (db)	3251
	Attenuation range	
	*____ db	3252
	*to ____ db	3253
	Attenuation stability (db change)	3254
	Maximum insertion loss (db)	3255
	Minimum insulation resistance (megohms)	3256

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.57 (Cont)	Vibration, Low Frequency (Cont)	
	Maximum resetability error (± db)	3257
	Maximum VSWR	3258
	The part shall remain within tolerance	1480
5.58	Vibration, Random	
	(Select one test method)	
	Test per 1006 document	1425
	Test per 1006 document except ____.	1426
	Test per MIL-STD-202 Method 214	1427
	*Test condition number and letter	1428
	Test as follows:	
	*Duration of application (Select one)	
	Hours	1431
	Minutes	1438
	Monitoring instrumentation (Select one)	
	Any suitable instrumentation system	1452
	Calibrated ac to dc converter and strip chart recorder	1453
	Calibrated oscilloscope	1459

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.58 (Cont)	Vibration, Random (Cont)	
	Number of test points	1430
	Location of monitoring points (Select one)	
	Any suitable location	1439
	As close as practical to test specimen	1462
	Method of mounting (Select one)	
	Any suitable method	4977
	Normal method	4976
	Mount in accordance with (5.7)	4975
	Pressurization test required	3260
	Measurements during and after test shall be in accordance with the requirements selected.	
	(Select one requirement)	
	Requirement(s) per 1006 document	1434
	Requirement(s) per 1006 document except ____.	1435
	Requirement(s) as follows:	
	No evidence of physical damage	1436
	No leakage as detected by escaping bubbles	3261

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.58 (Cont)	Vibration, Random (Cont)	
	Test performance requirements (Select one or more requirements)	
	Maximum attenuation (db)	3262
	Attenuation range	
	*_____ db	3263
	*to _____ db	3264
	Attenuation stability (db change)	3265
	Maximum insertion loss (db)	3266
	Minimum insulation resistance (megohms)	3267
	Maximum resetability error (± db)	3268
	Maximum VSWR	3269
	The part shall be within tolerance and shall meet design or performance characteristics.	3270
5.59	Voltage Standing Wave Ratio	
	(Select one test method)	
	Test per 1006 document	2018
	Test per 1006 document except _____.	2019
	Test per (see 5.7)	2020

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.59 (Cont)	Voltage Standing Wave Ratio (Cont)	
	Test as follows:	
	Test per VSWR Test Table III	2021
	(Enter applicable codes and values on SRS from Table III)	
	Measure VSWR by reflectometer system	
	Ratio meter indication	
	*Reflection coefficient (P)	2022
	VSWR measurement frequency range	
	*_____ GHz minimum	2023
	*_____ GHz maximum	2024
	(Select one requirement)	
	Requirement(s) per 1006 document	2025
	Requirement(s) per 1006 document except _____.	2026
	Requirement(s) as follows:	
	Attenuators	
	Maximum VSWR	
	per Table III	2027
	at minimum attenuation	2028

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.59 (Cont)	Voltage Standing Wave Ratio (Cont)	
	at 50 percent of attenuation	2029
	at maximum attenuation	2030
	with reflection coefficient P	3150
	Adapters	
	Maximum VSWR	
	Over specified frequency band	3151
	At 50 percent of frequency band	3152
	Couplers	
	Maximum primary line input VSWR	3153
	Secondary line VSWR (Select one)	
	_____ maximum (waveguide output)	3154
	_____ maximum (coaxial output)	3155
	Switches	
	Maximum VSWR (over specified frequency band)	3156

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 6

USE OF AEDPS

6.1 Procedure

The step by step procedure contained in MIL-STD-35 is applicable to Microwave/Waveguide Components.

Custodians:
Army-MI

Review Activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User Activity:
Army-MU

Preparing Activity:
Army-MI
(Project EDS-A101)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 7

FIGURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

7.1 ADAPTERS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

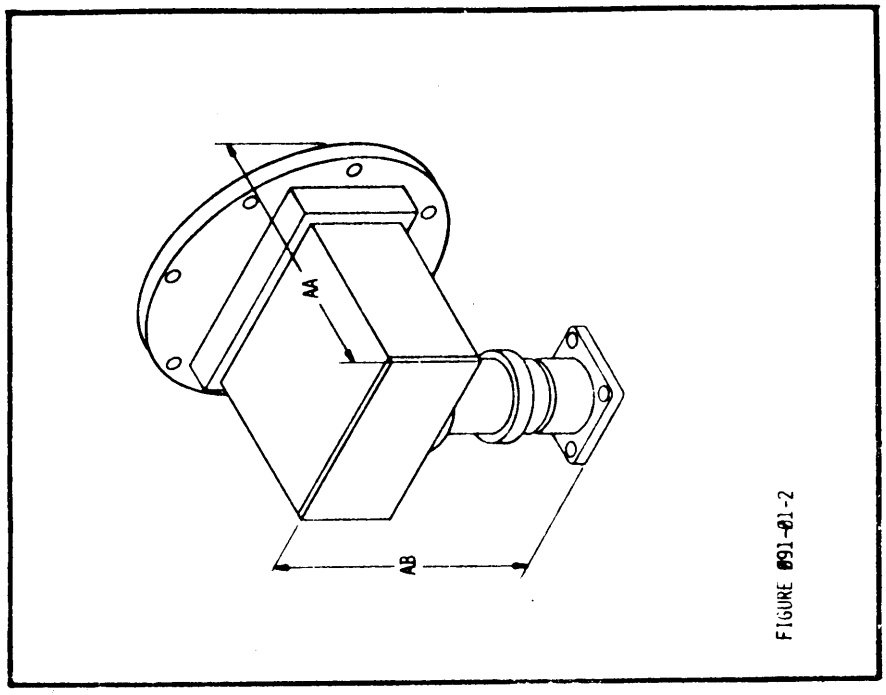


FIGURE 091-01-2


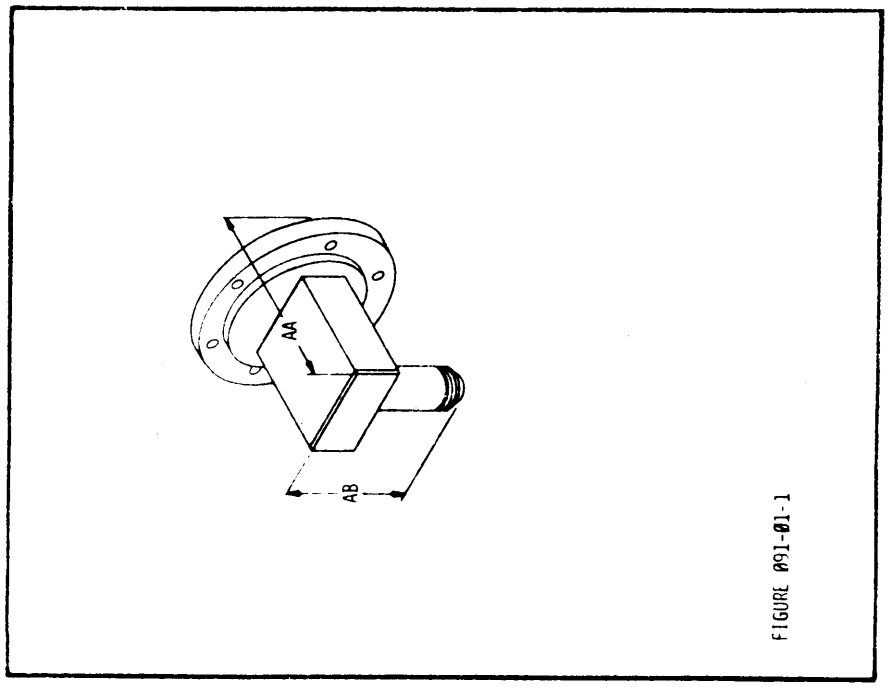


FIGURE 091-01-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS SPACE INTENTIONALLY
LEFT BLANK

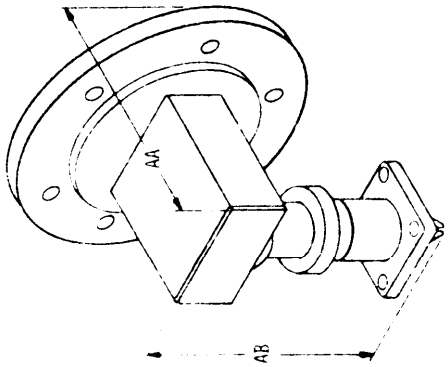

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

7.2 FIXED ATTENUATORS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

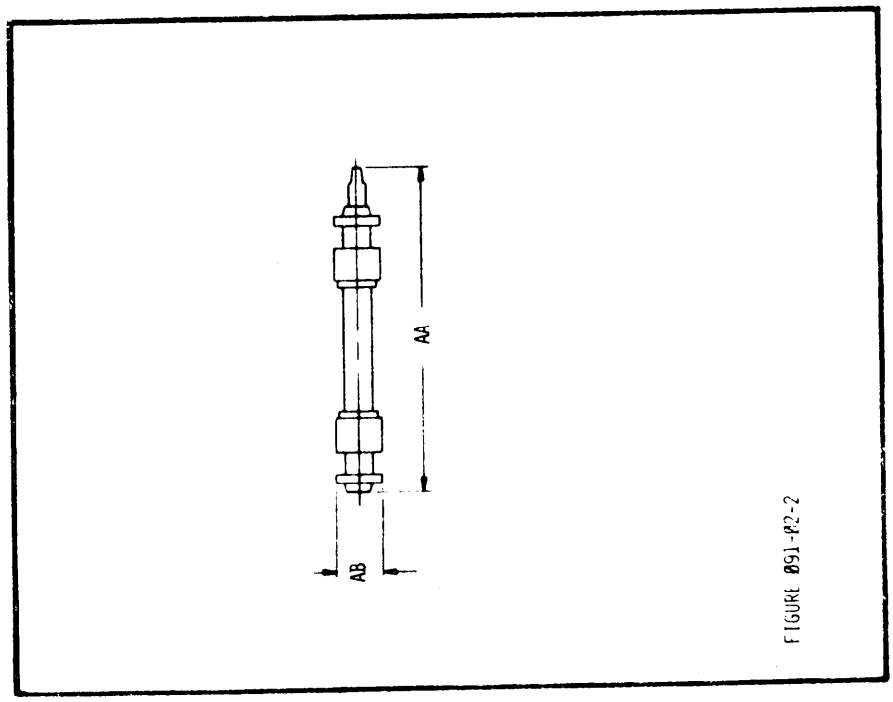


FIGURE 091-02-2



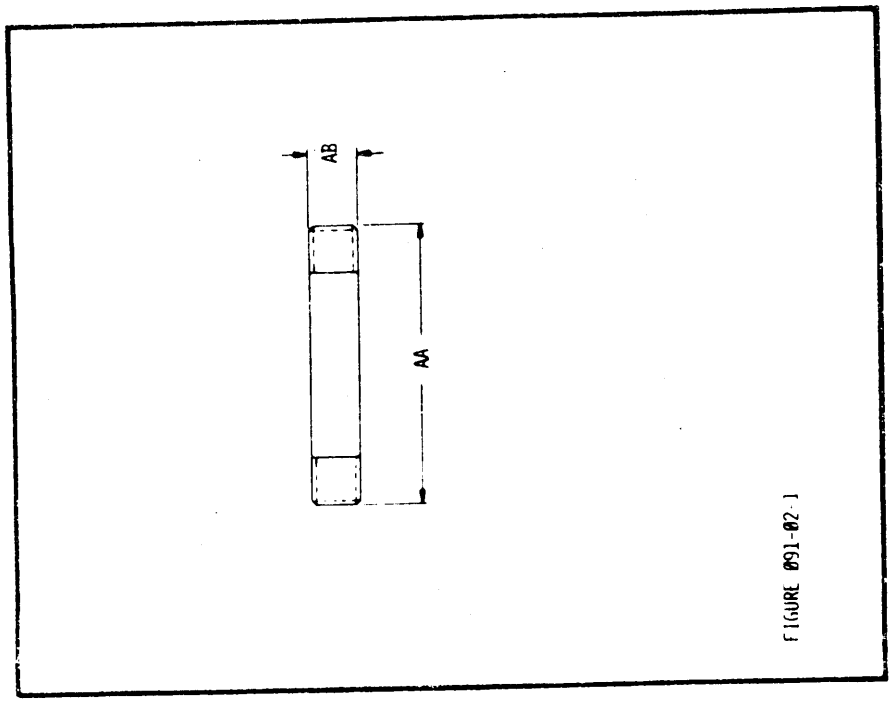


FIGURE 091-02-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

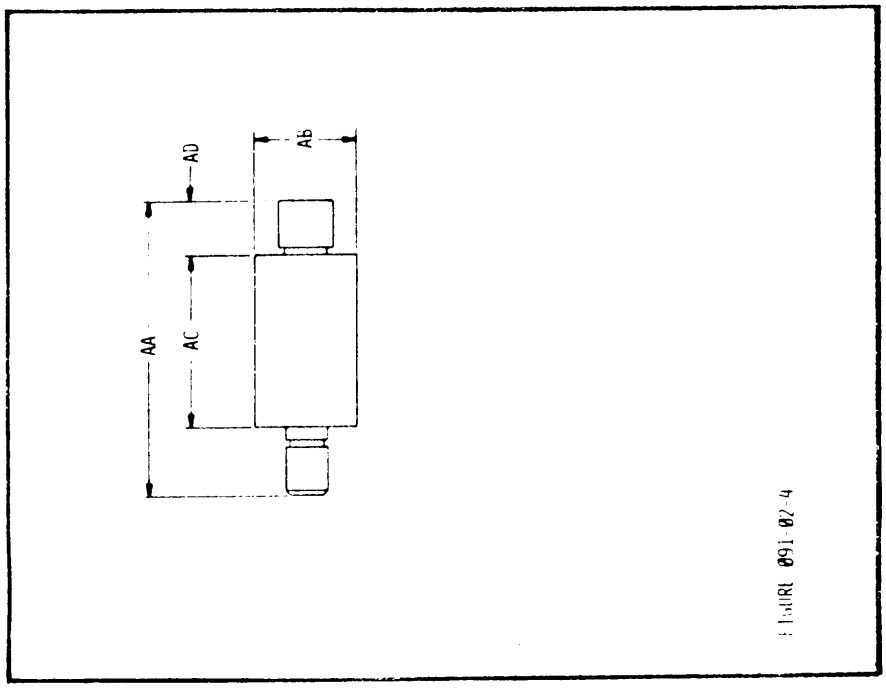

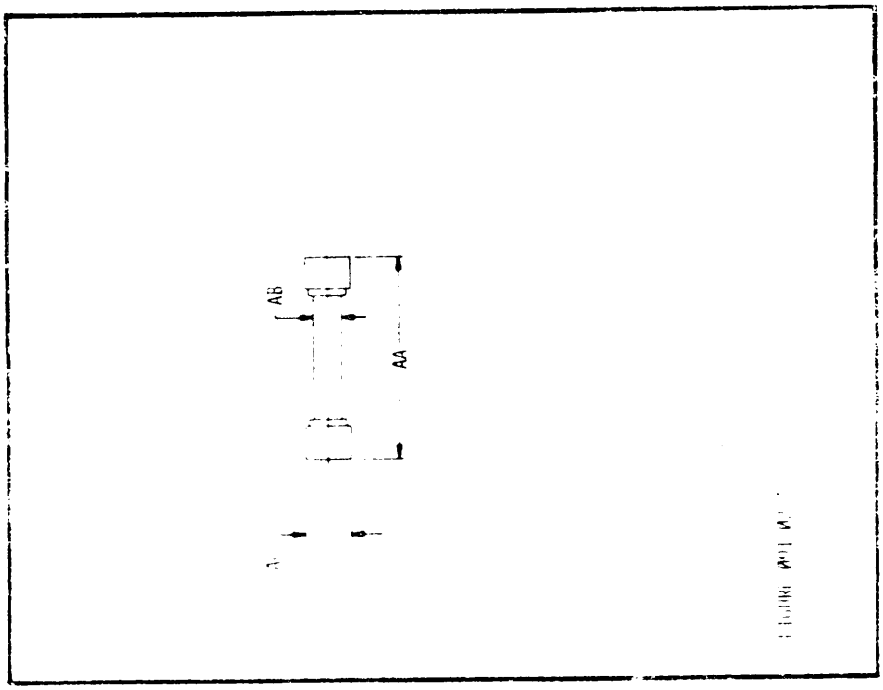

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

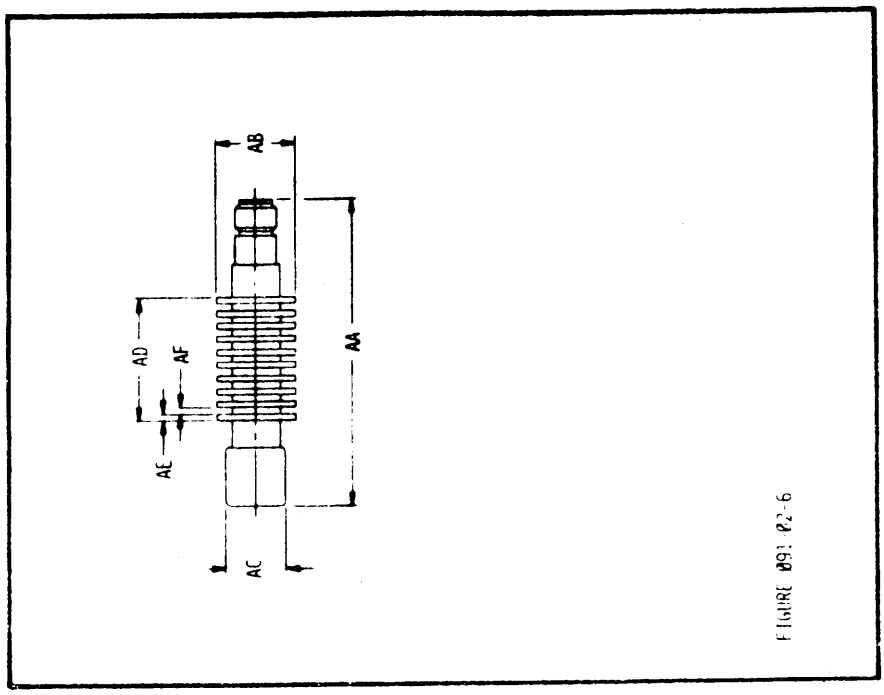


FIGURE 9-2-6

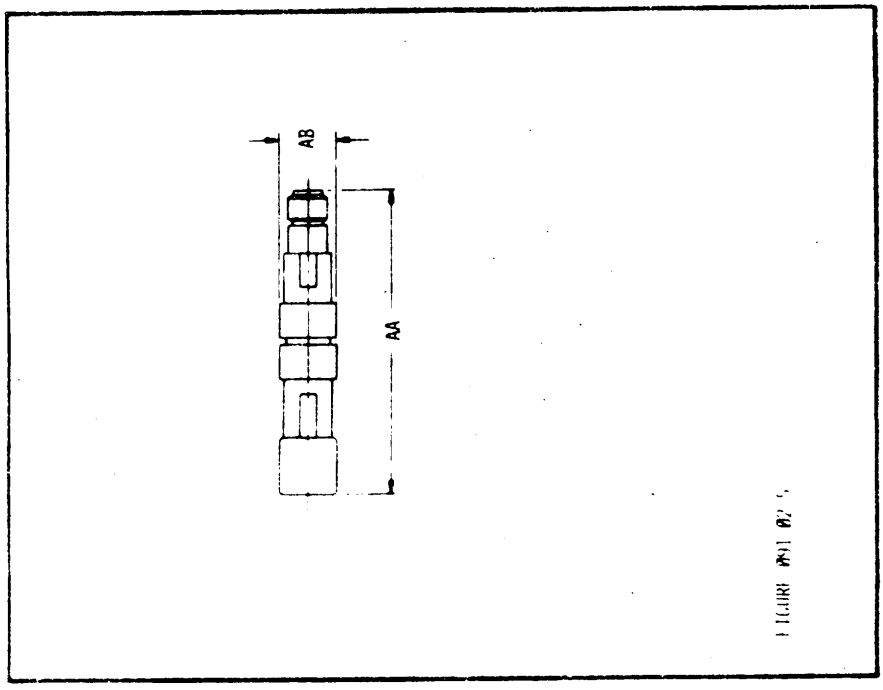


FIGURE 9-2-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

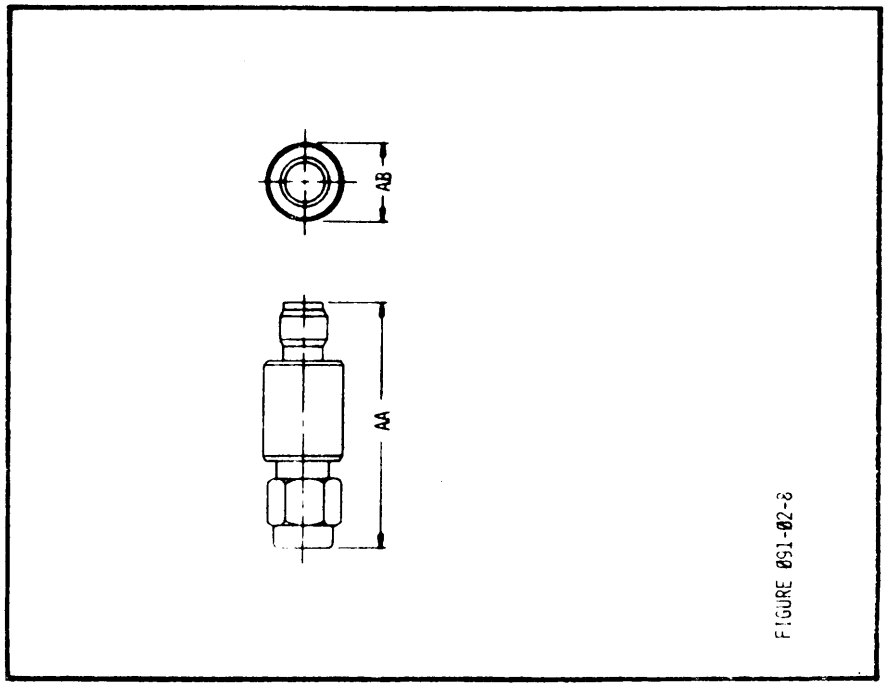


FIGURE 091-02-8


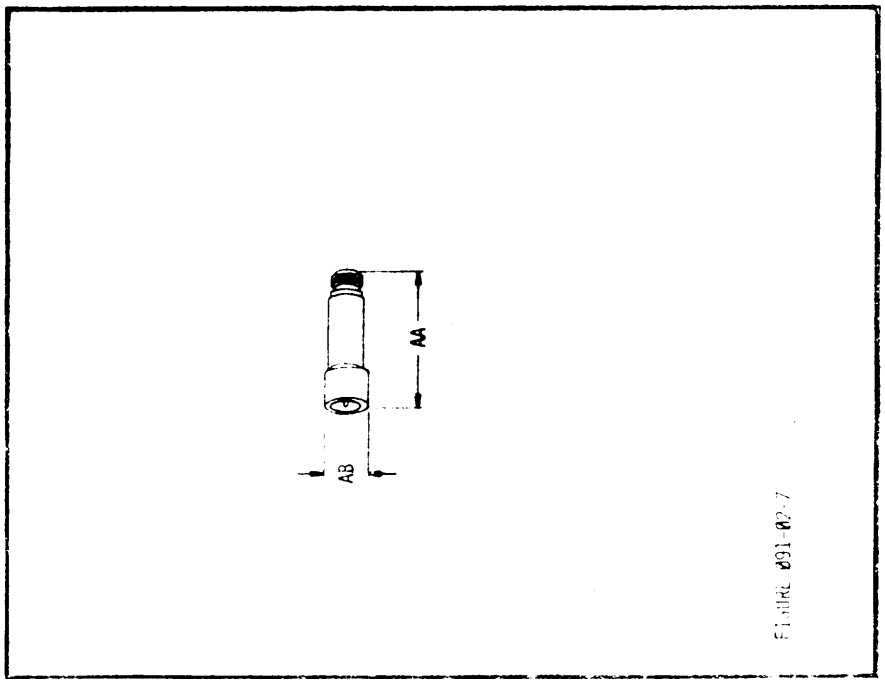


FIGURE 091-02-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS SPACE INTENTIONALLY
LEFT BLANK



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

7.3 VARIABLE ATTENUATORS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

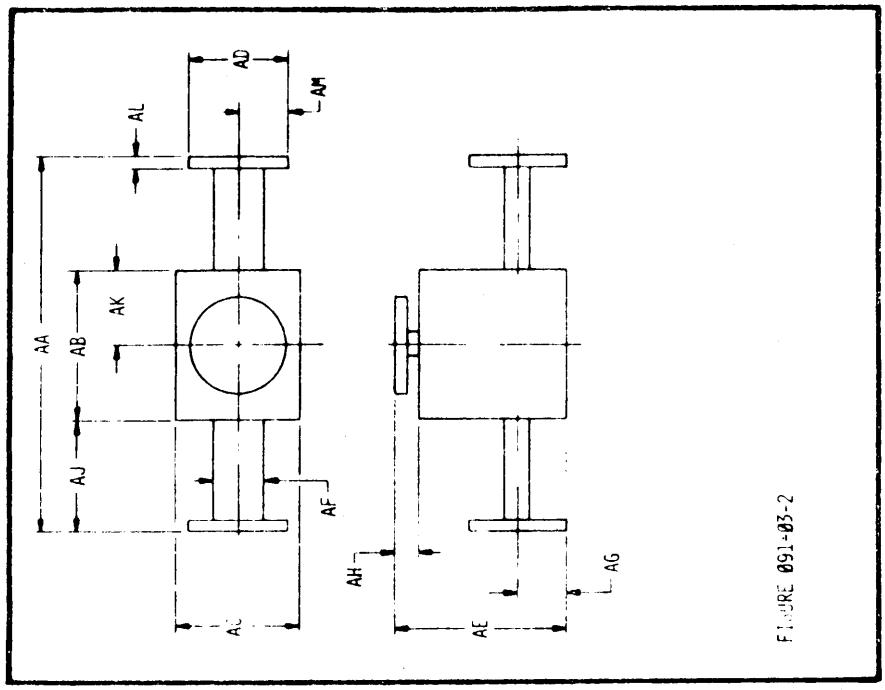


FIGURE 091-03-2

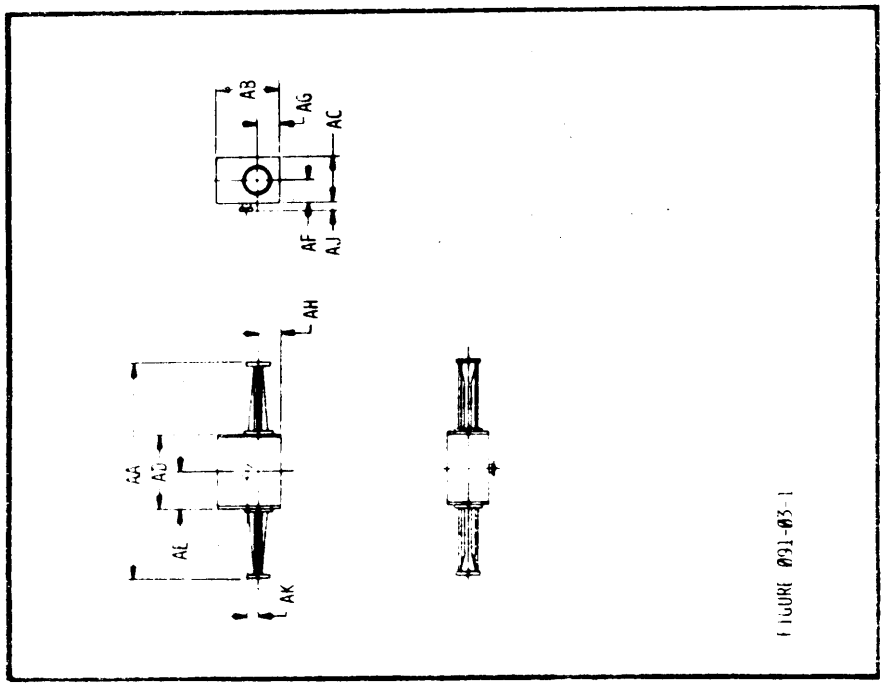


FIGURE 091-03-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.


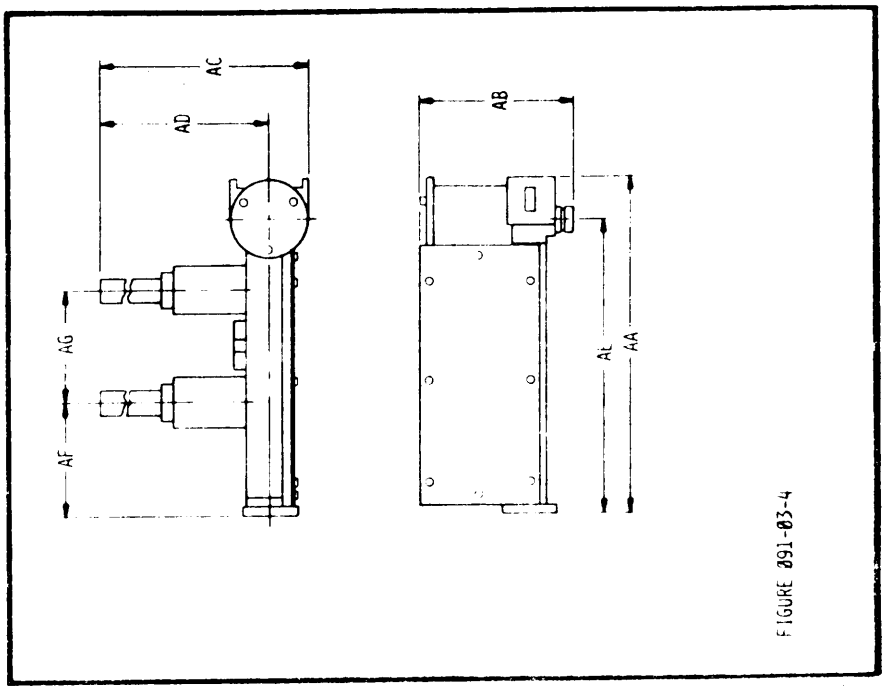


FIGURE 891-03-4

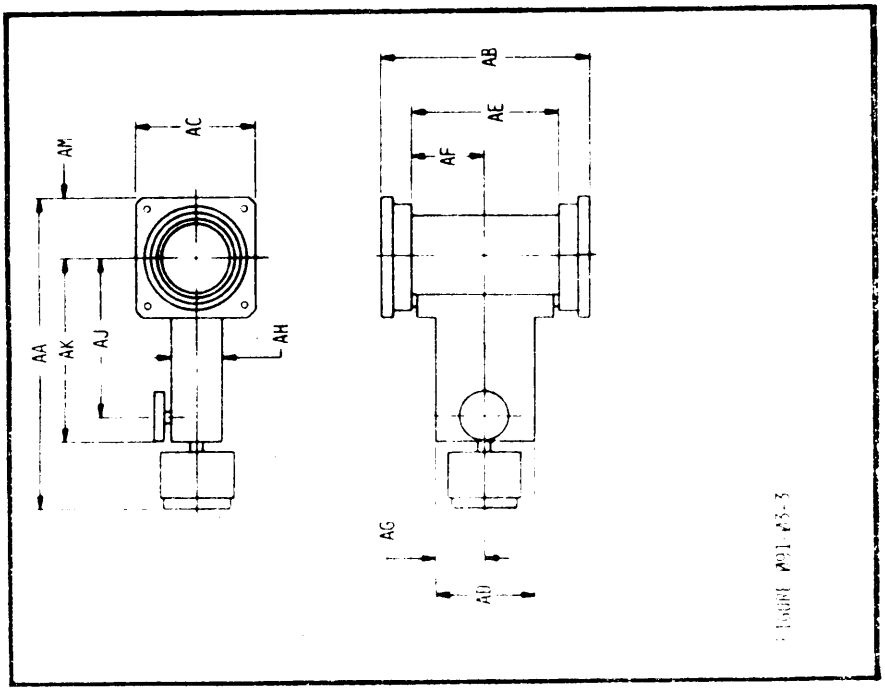

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

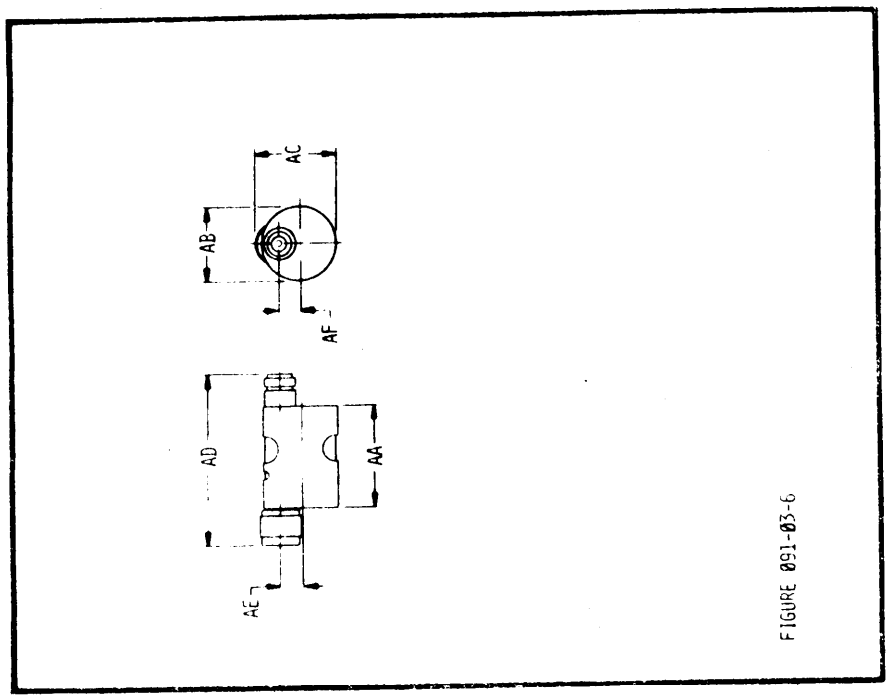


FIGURE 091-03-6



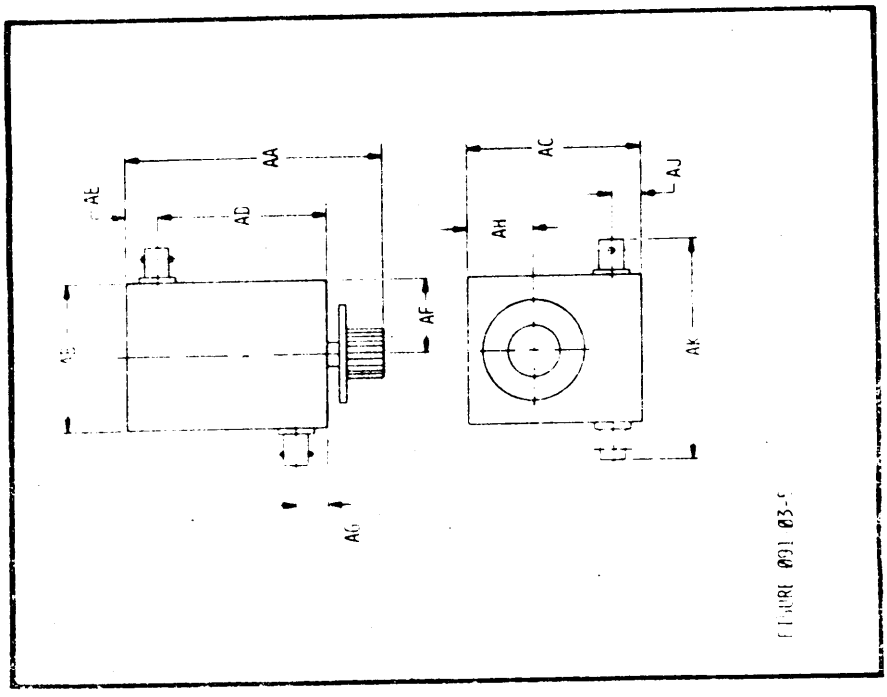


FIGURE 091 03-

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

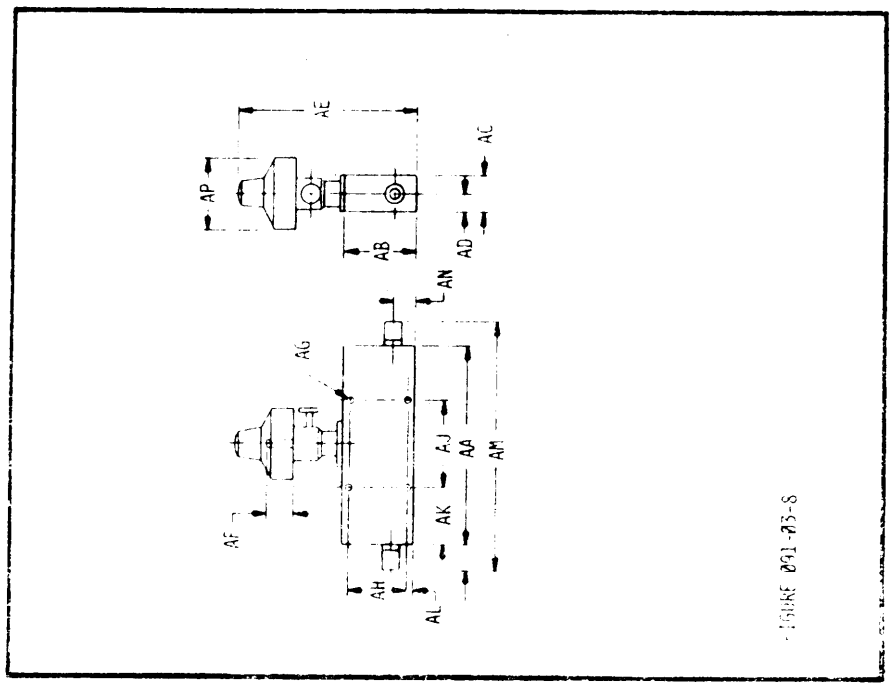

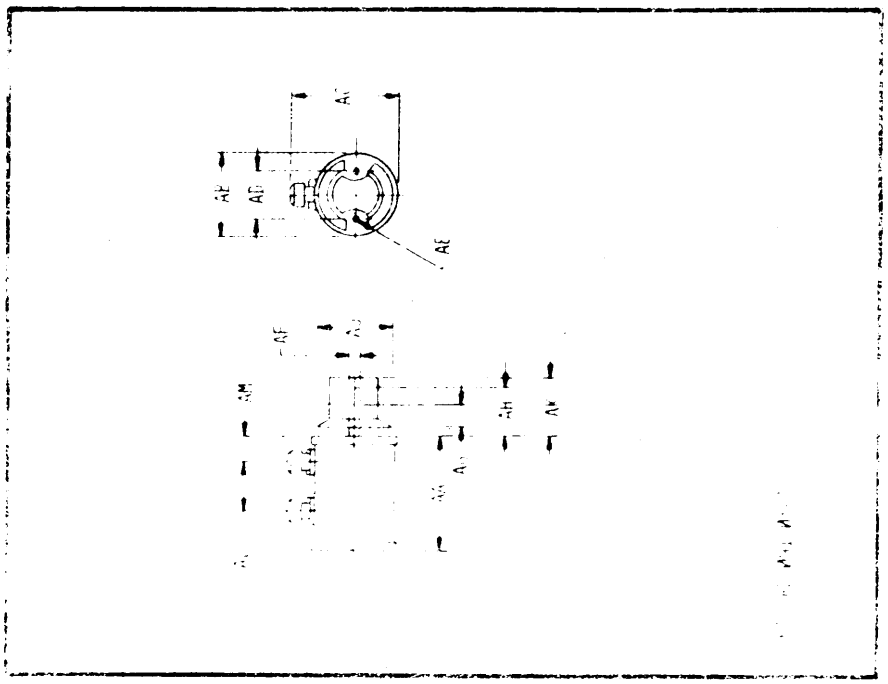

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

7.4 DIRECTIONAL COUPLERS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

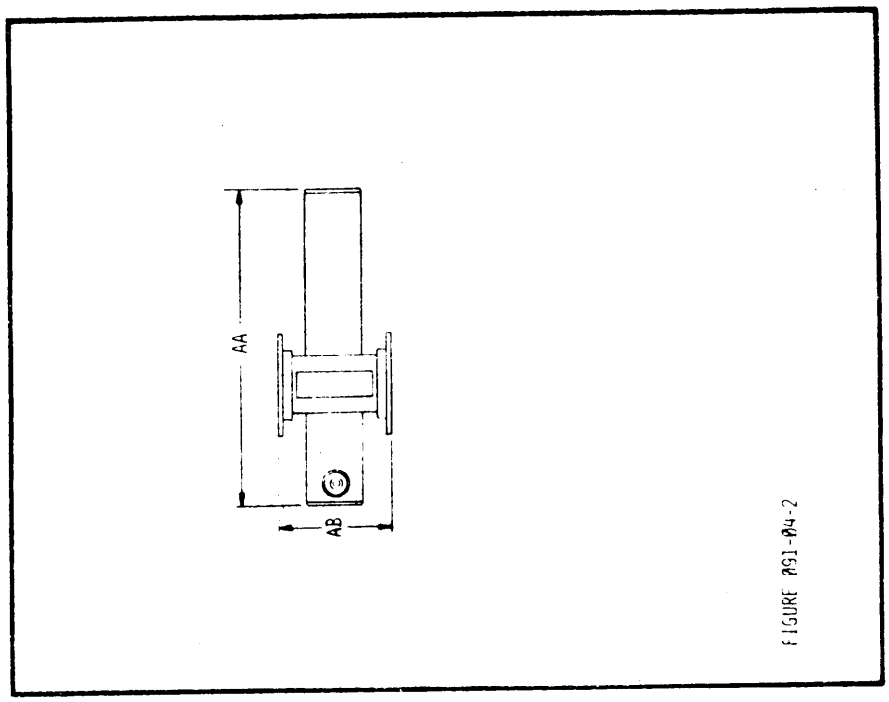


FIGURE A91-A4-2

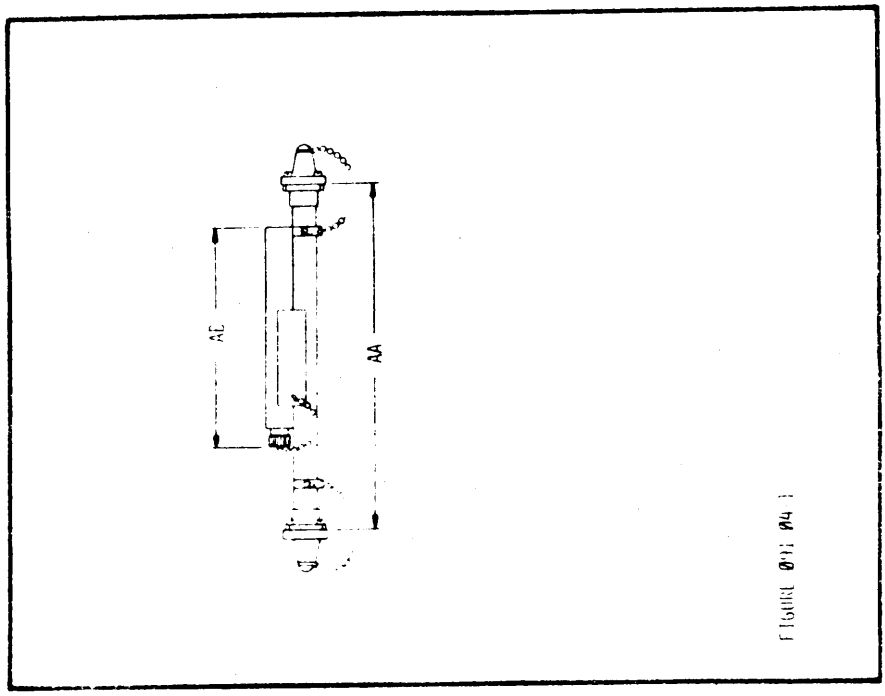


FIGURE A91-A4-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.


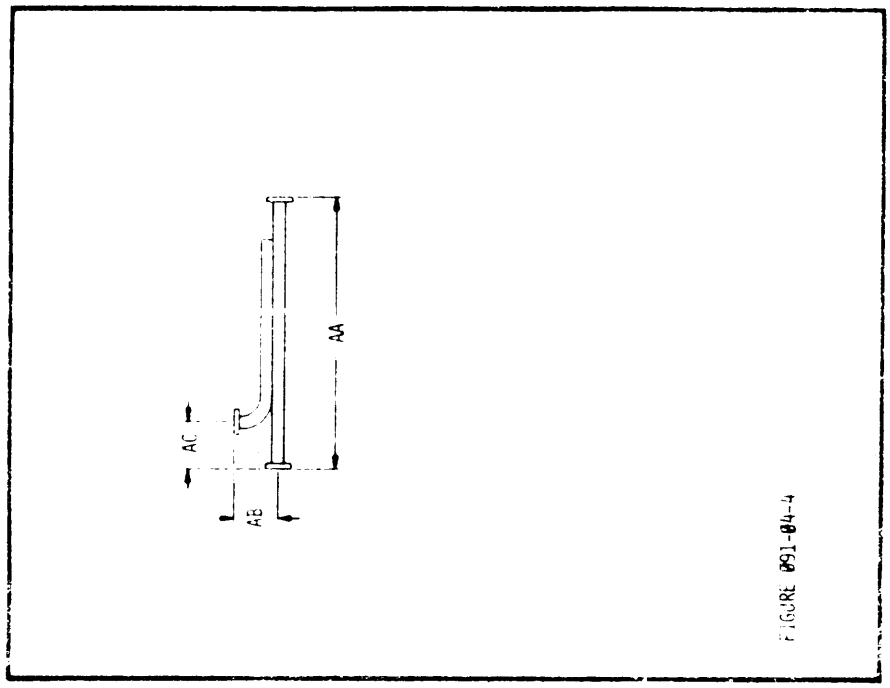


FIGURE 091-04-4

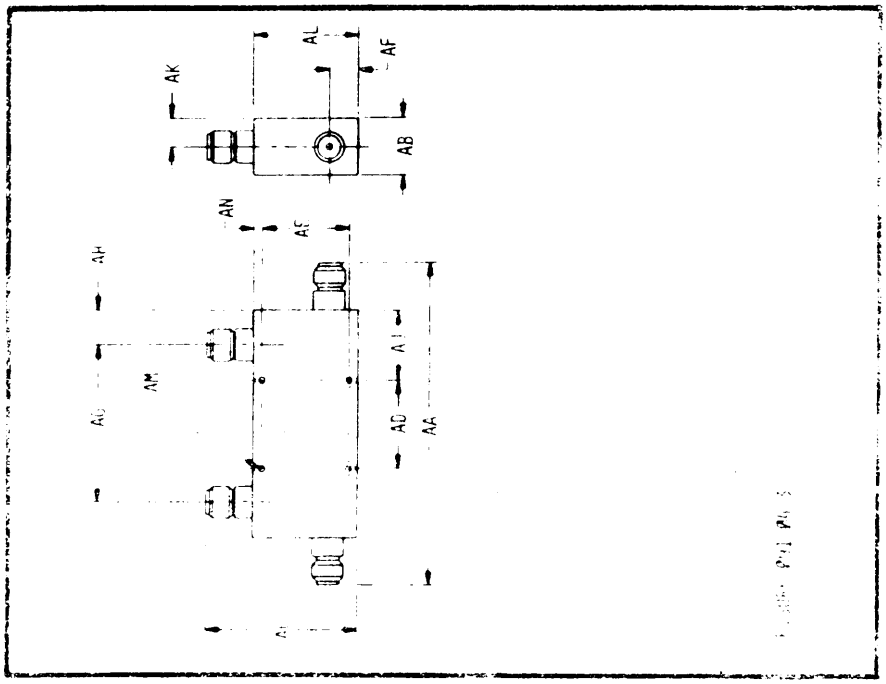

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.




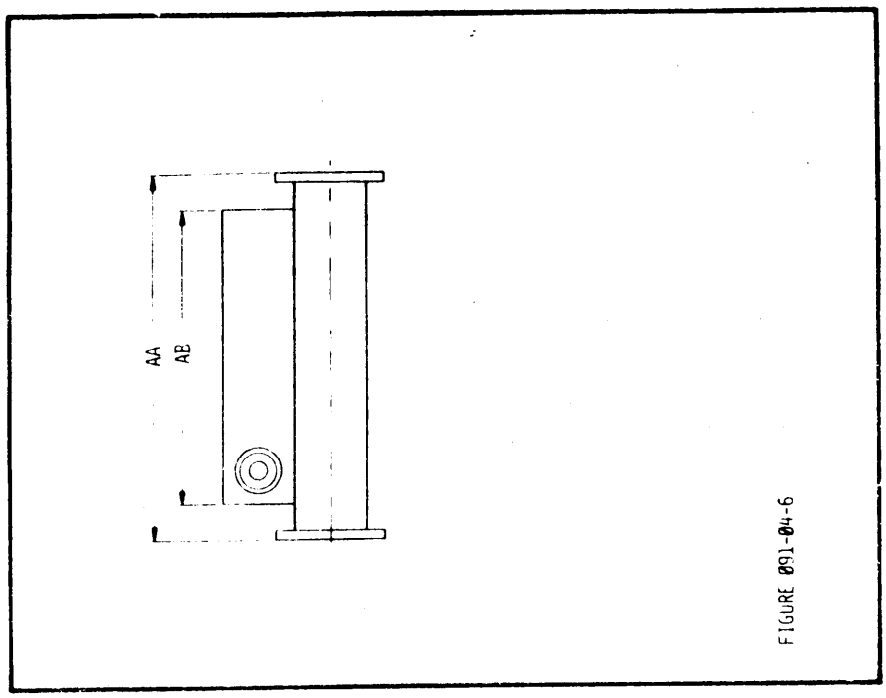


FIGURE 091-04-6

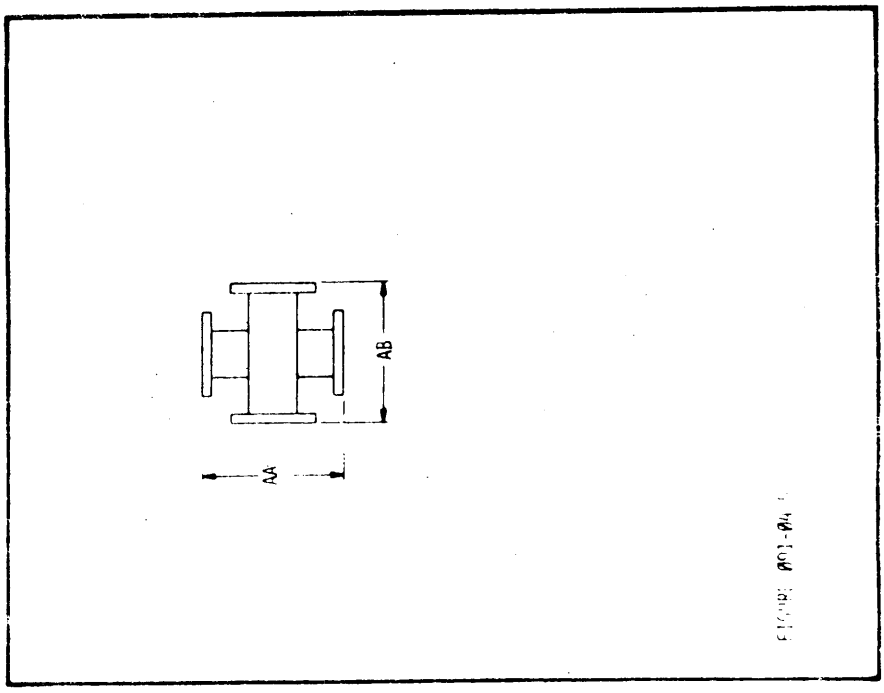

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

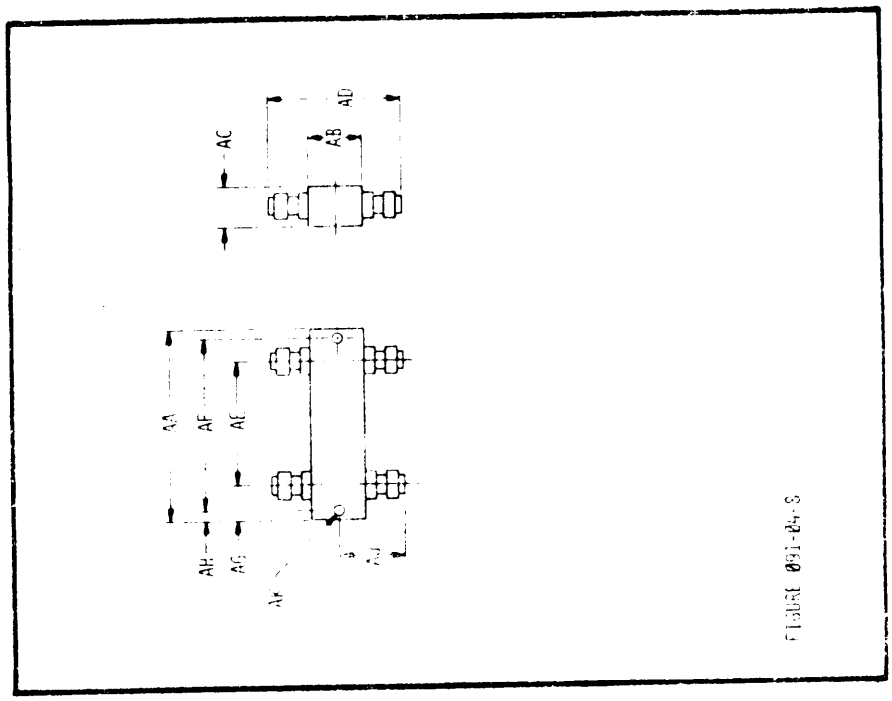

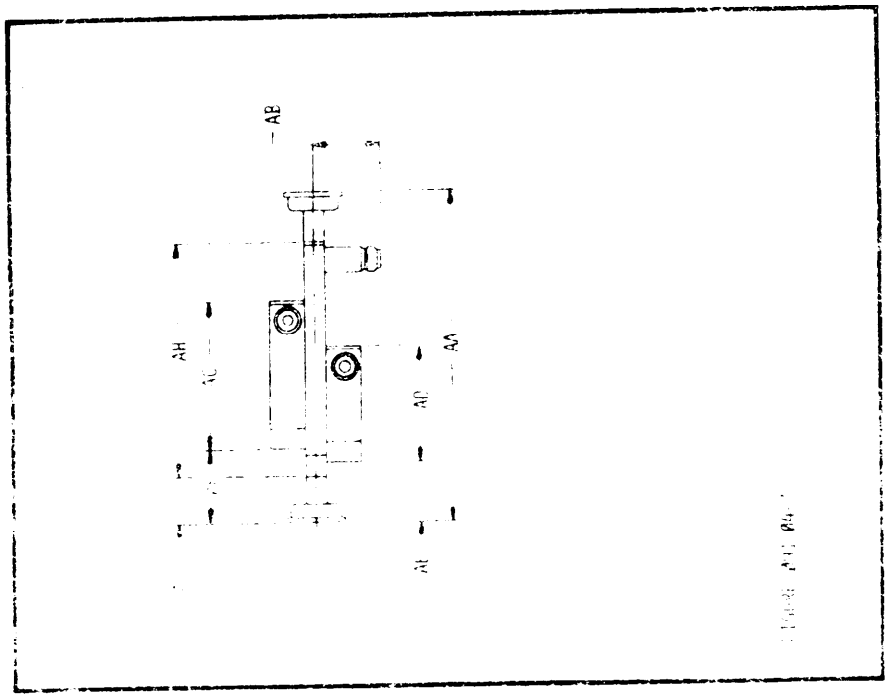

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

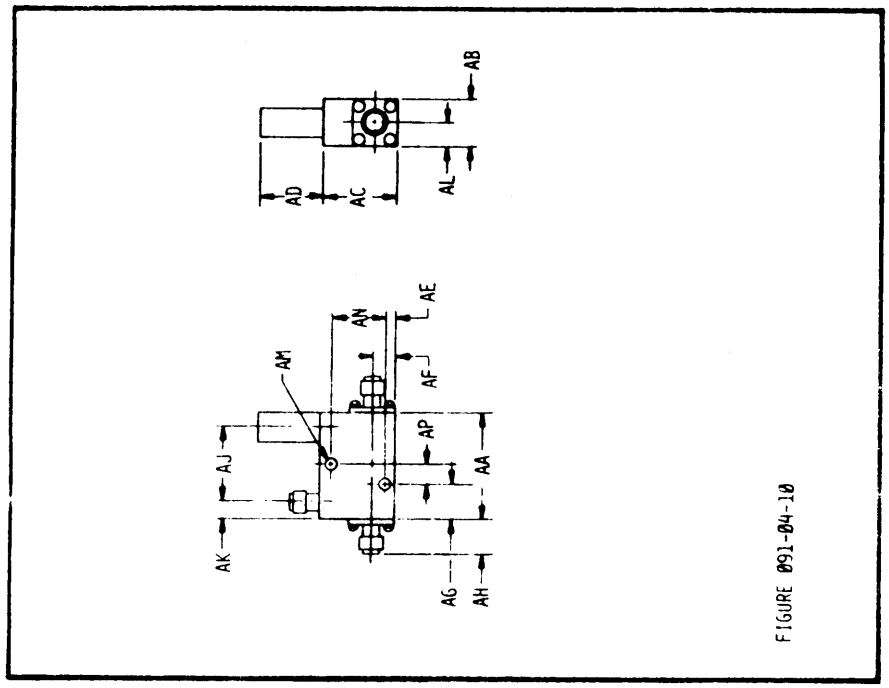


FIGURE 0491-04-10



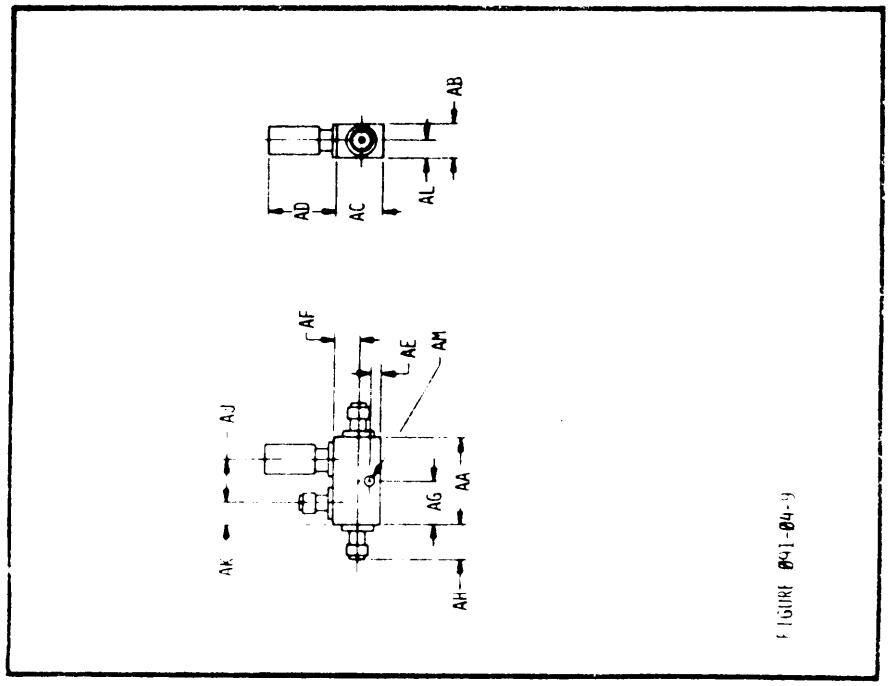


FIGURE 0491-04-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

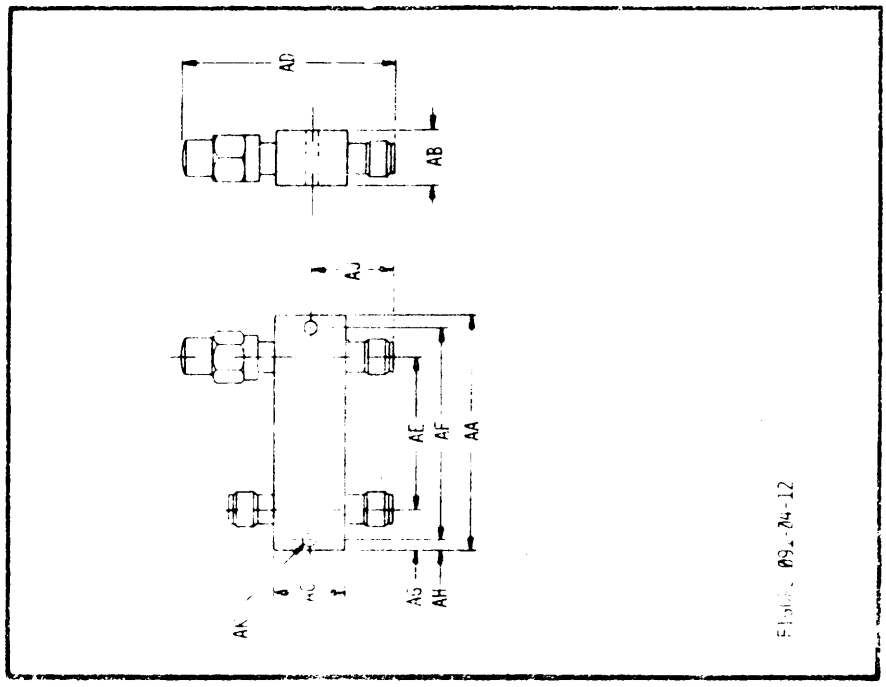

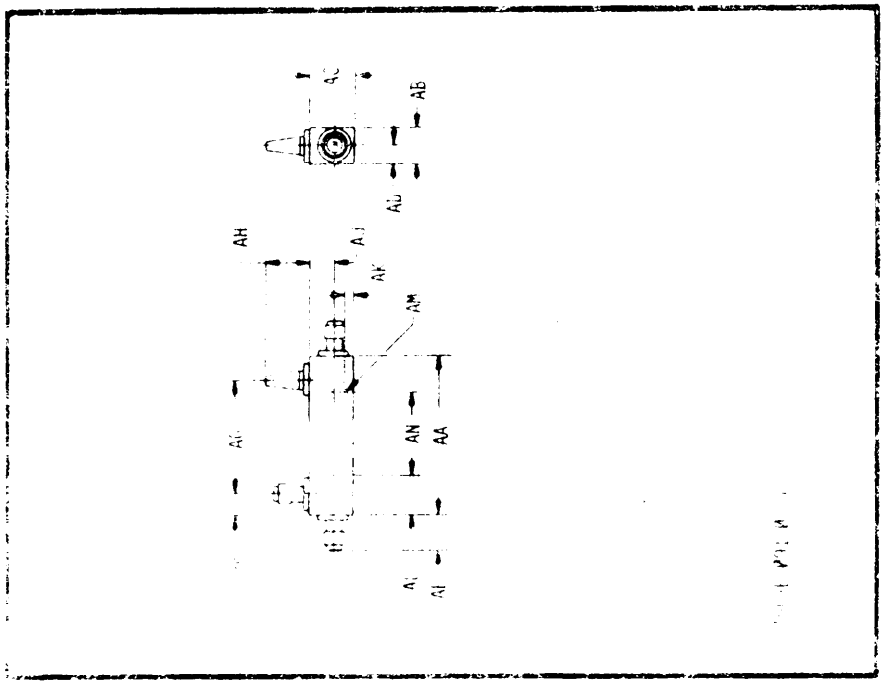

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

7.5 SWITCHES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.


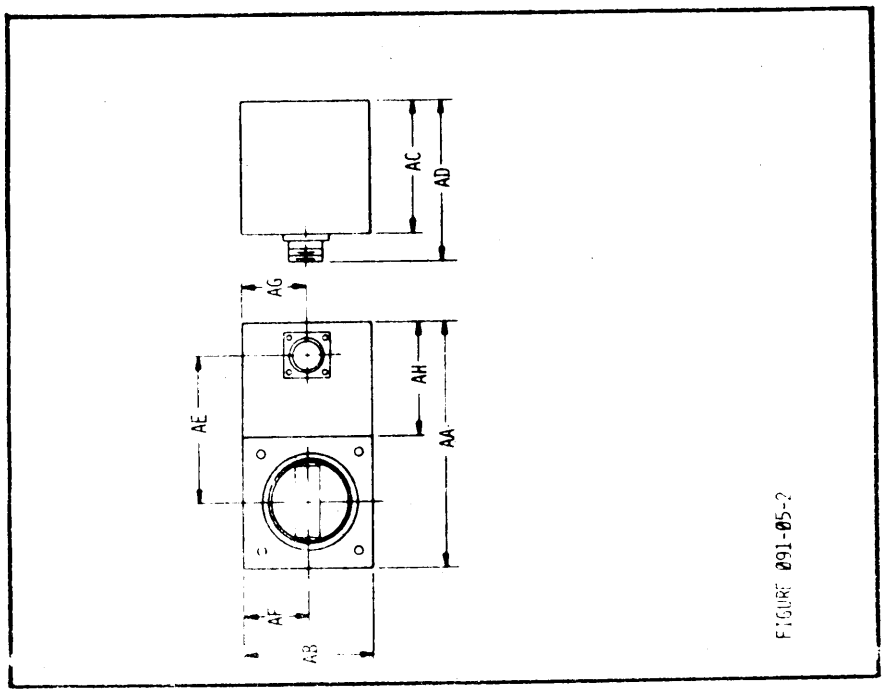


FIGURE 091-05-2

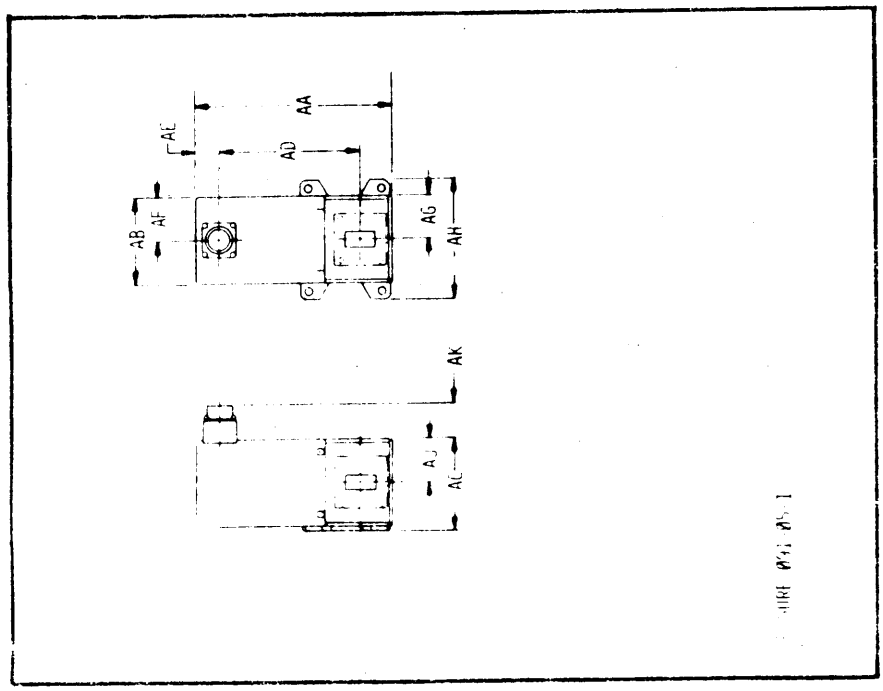

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.


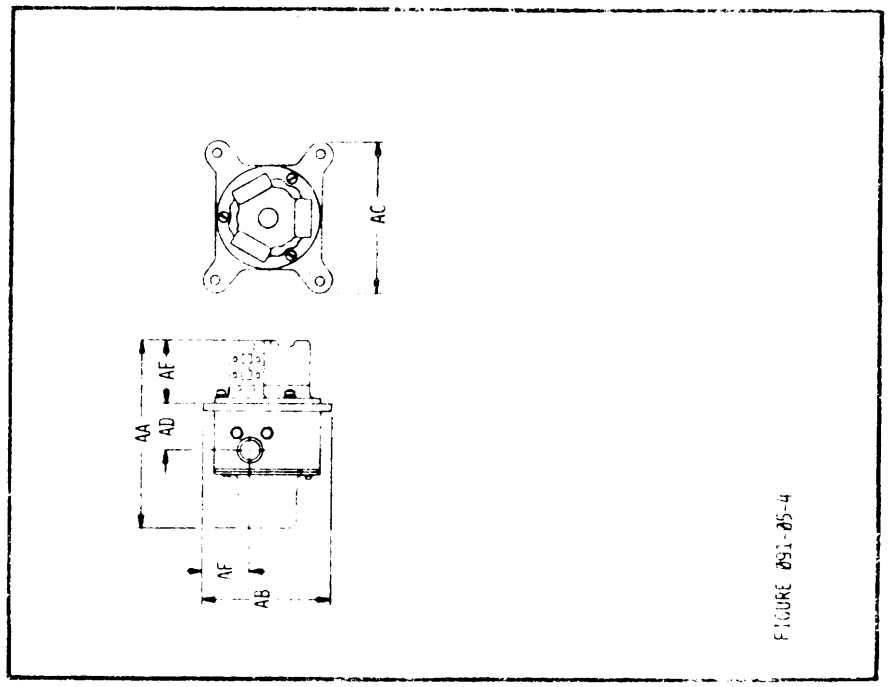


FIGURE 851-05-4

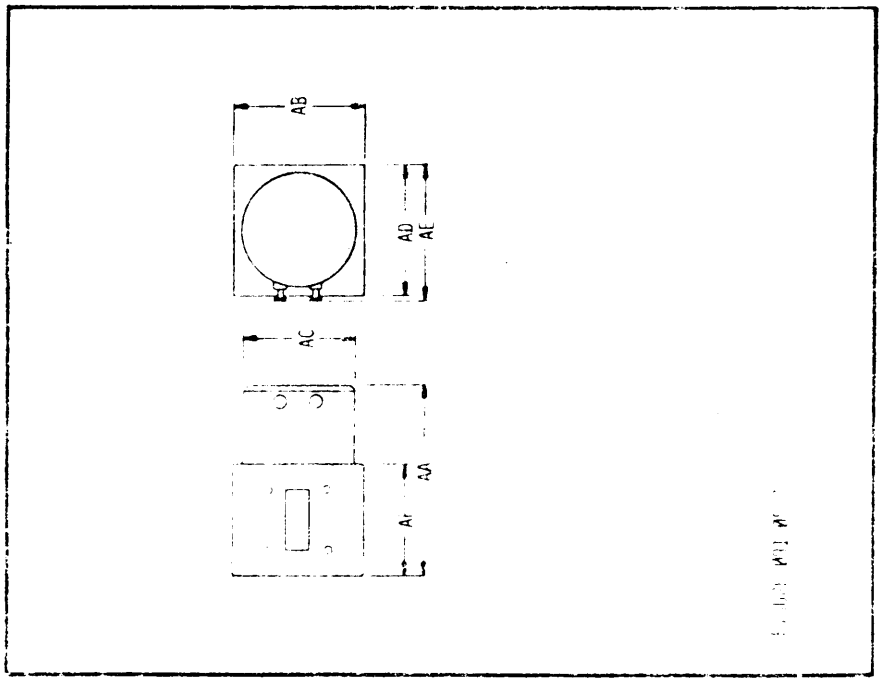

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

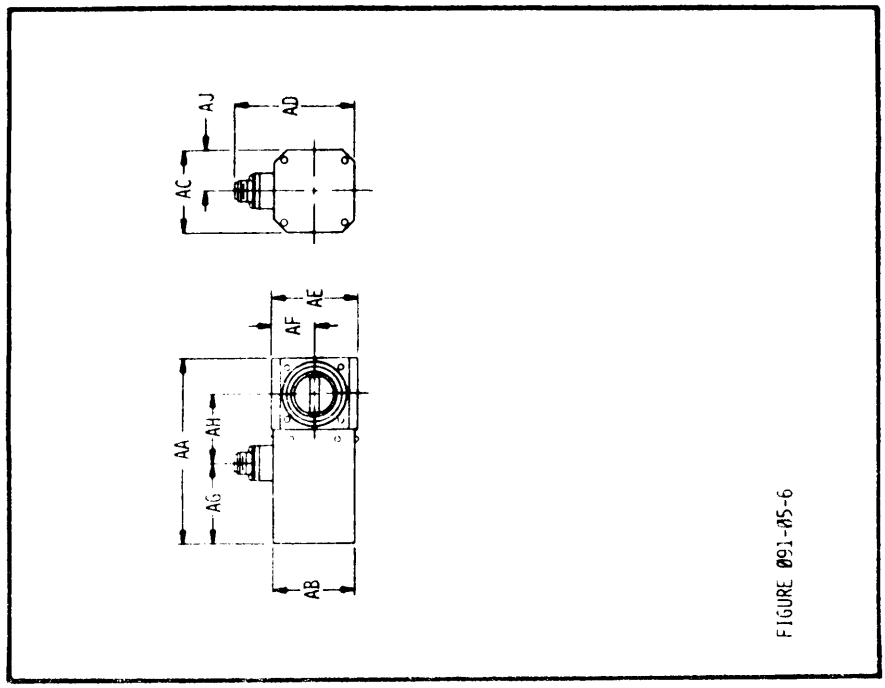


FIGURE 091-035-6

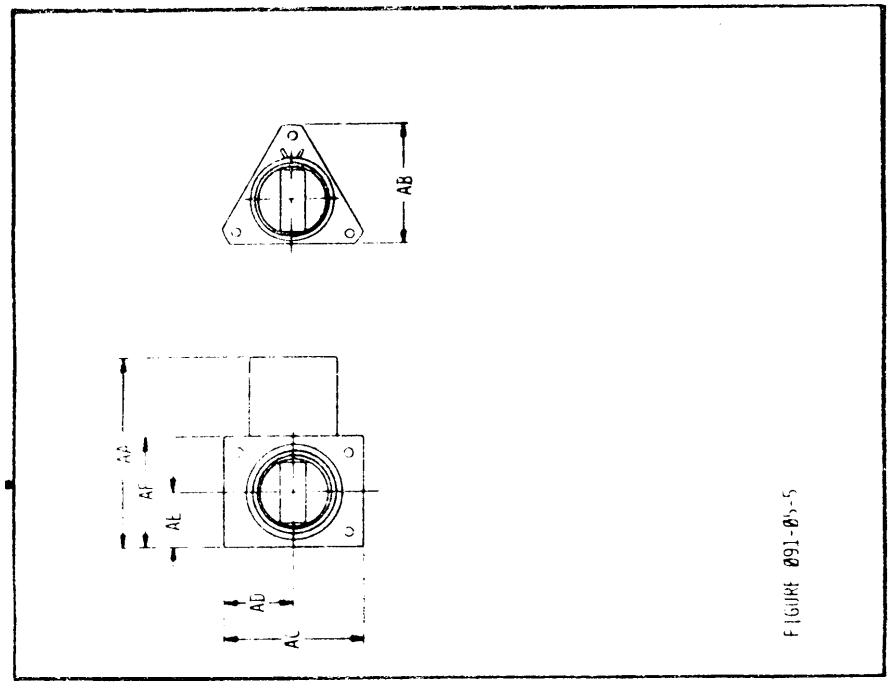


FIGURE 091-035-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

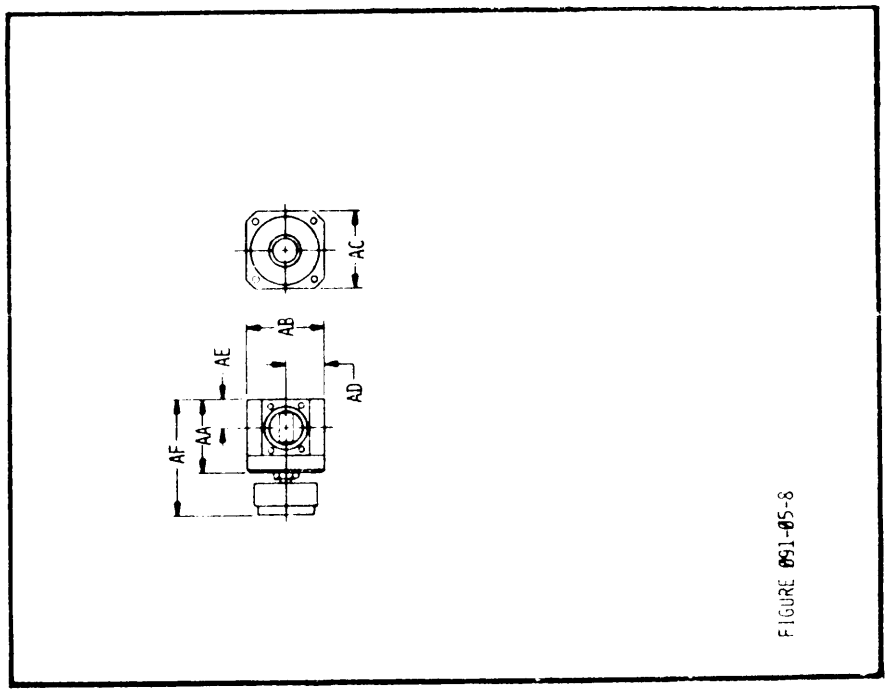


FIGURE 091-05-8

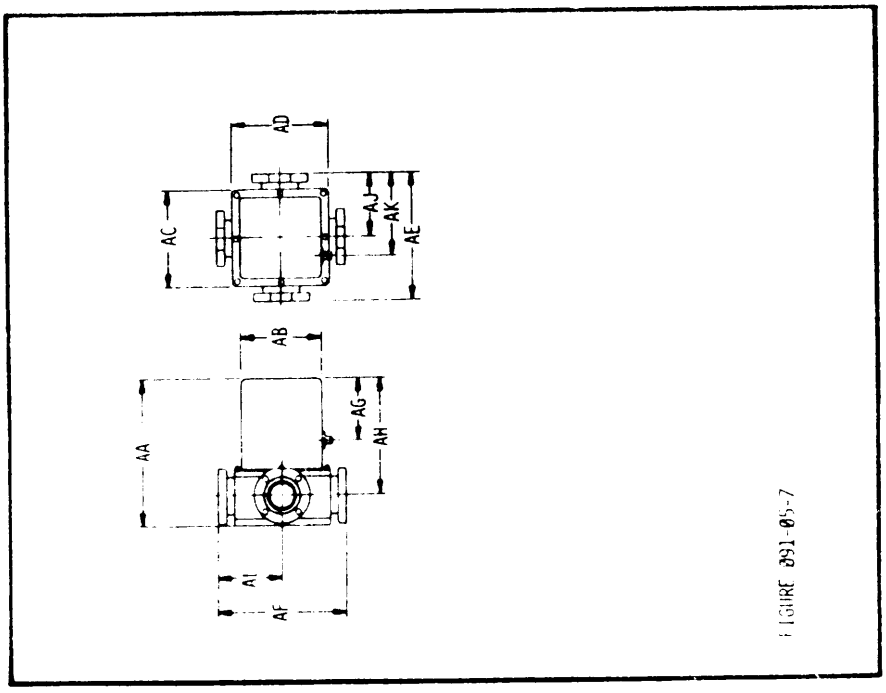


FIGURE 091-05-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

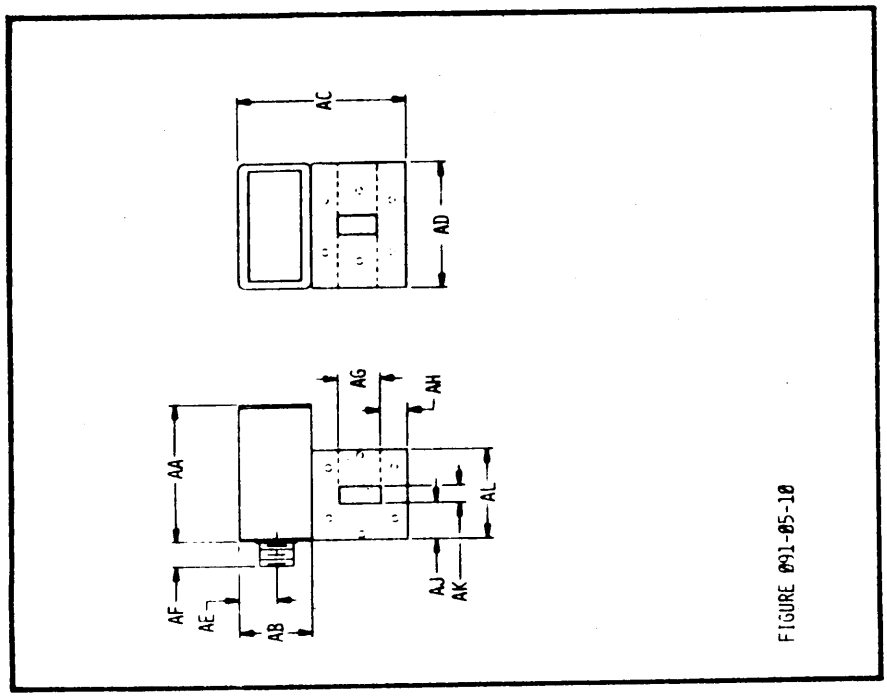


FIGURE 091-05-10

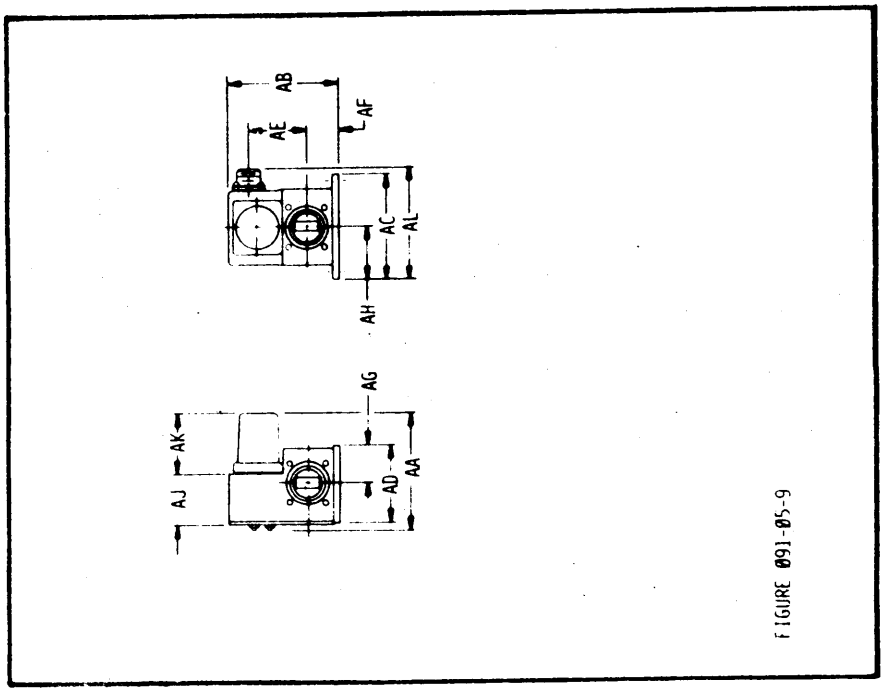


FIGURE 091-05-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

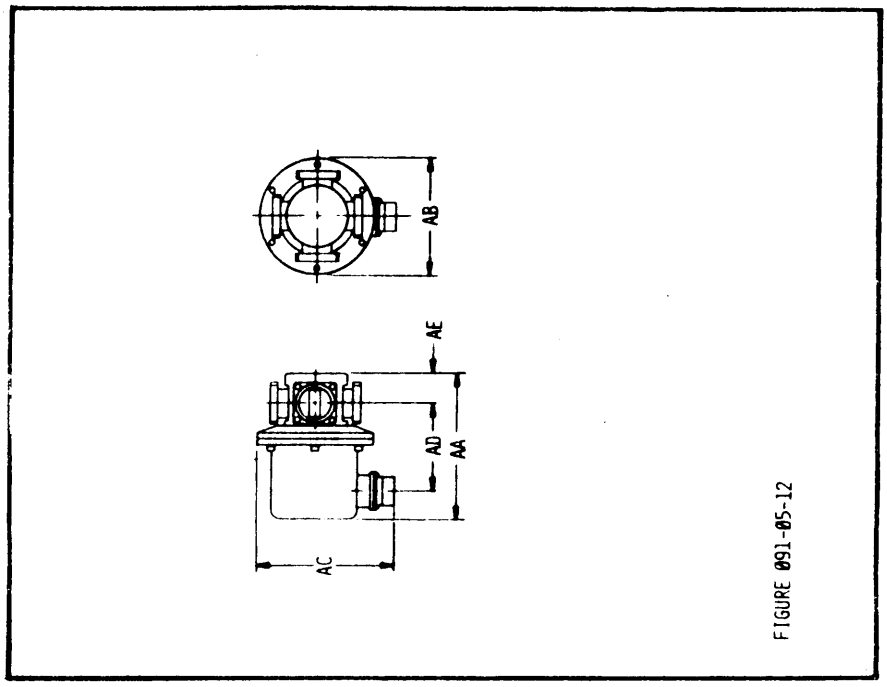


FIGURE 091-05-12

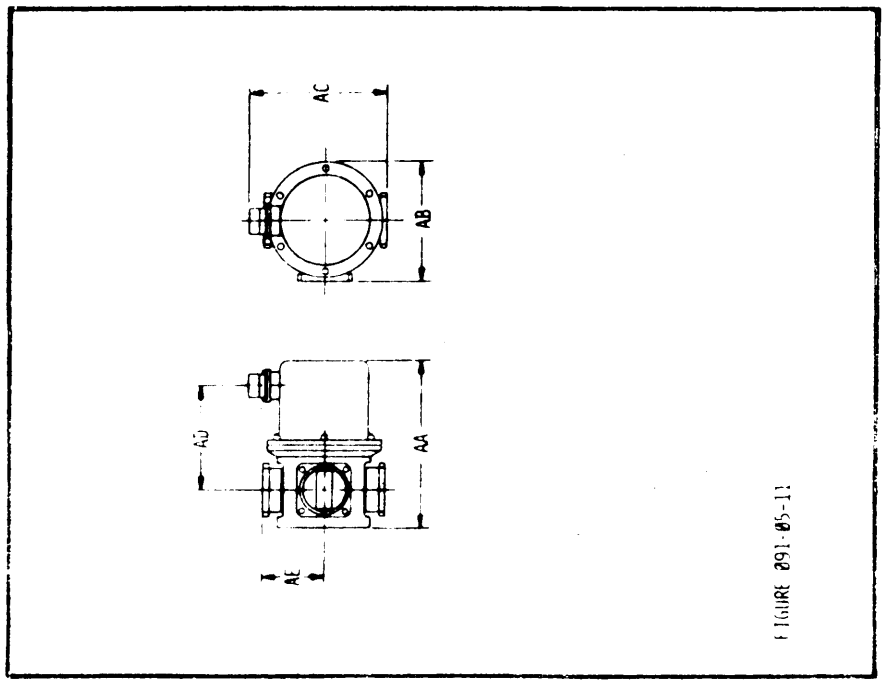


FIGURE 091-05-11

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

7.5.1 SWITCH MOUNTING PATTERNS

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

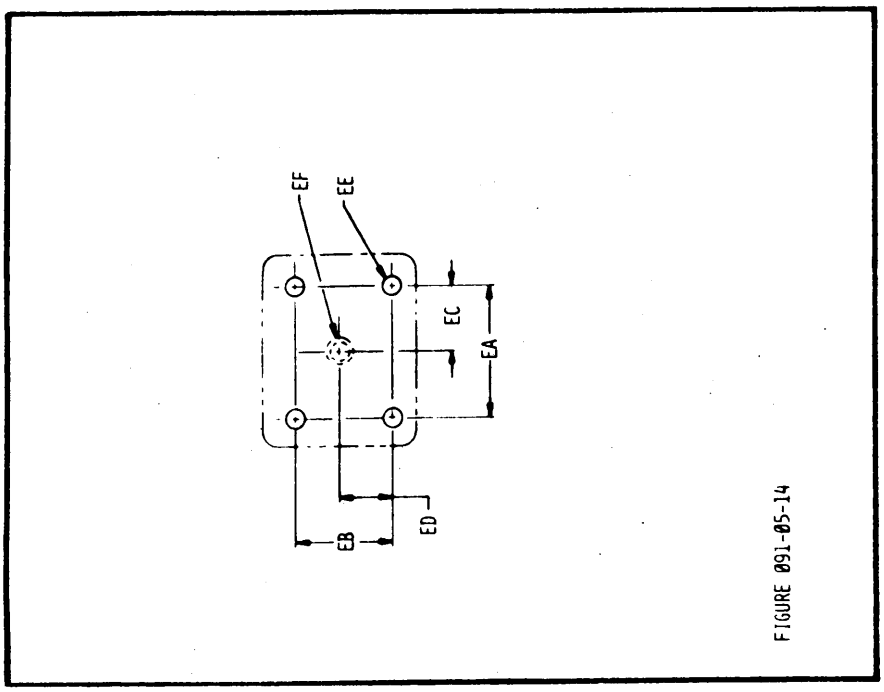


FIGURE 091-05-14

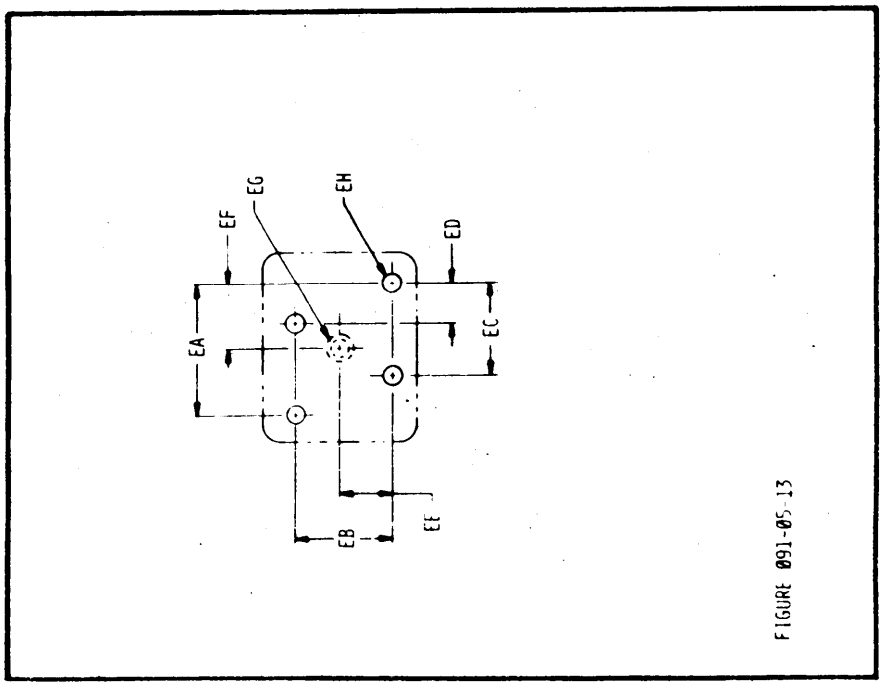


FIGURE 091-05-13

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

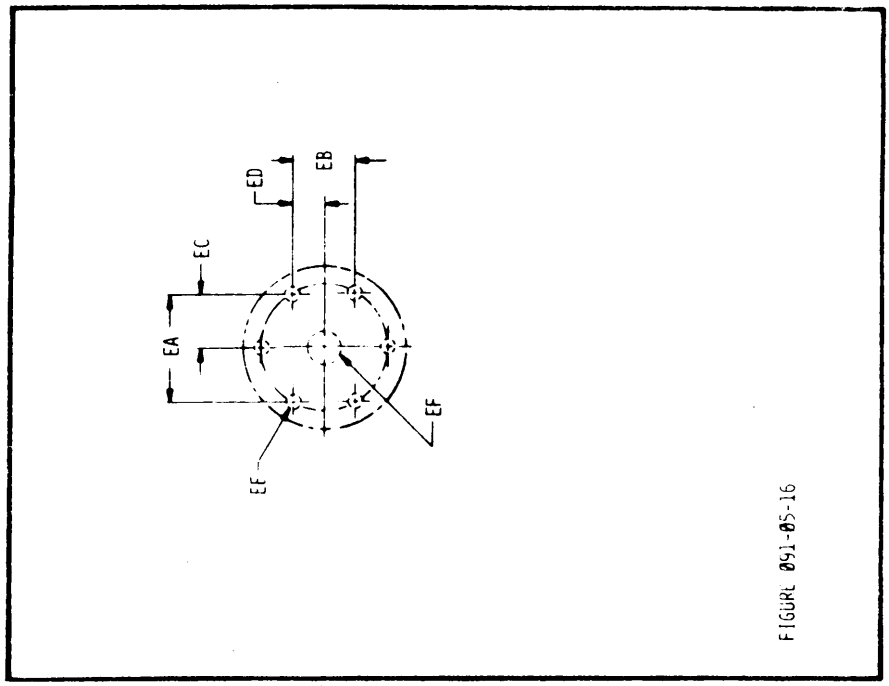


FIGURE 091-05-16

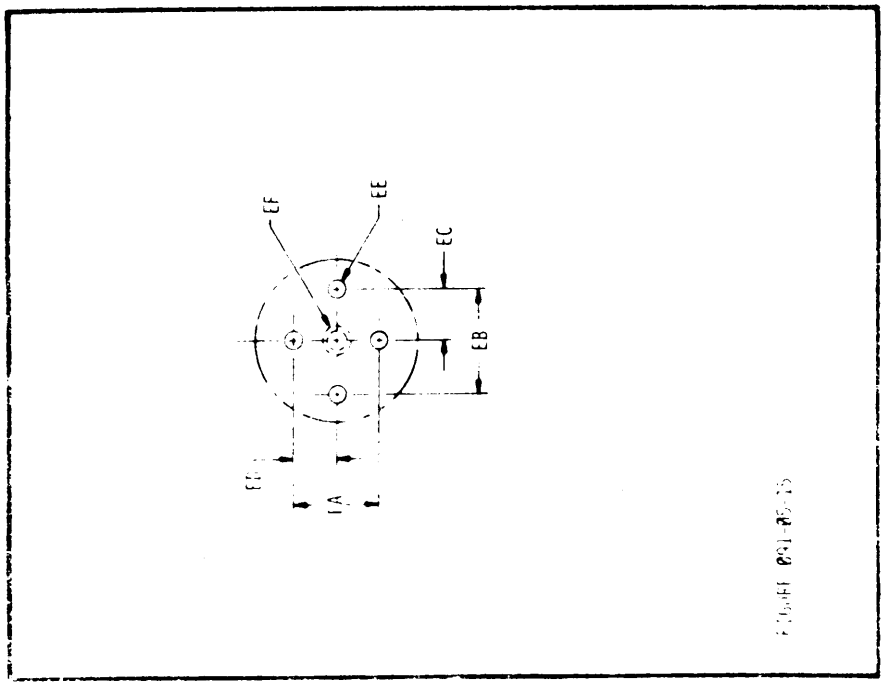


FIGURE 091-05-17

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

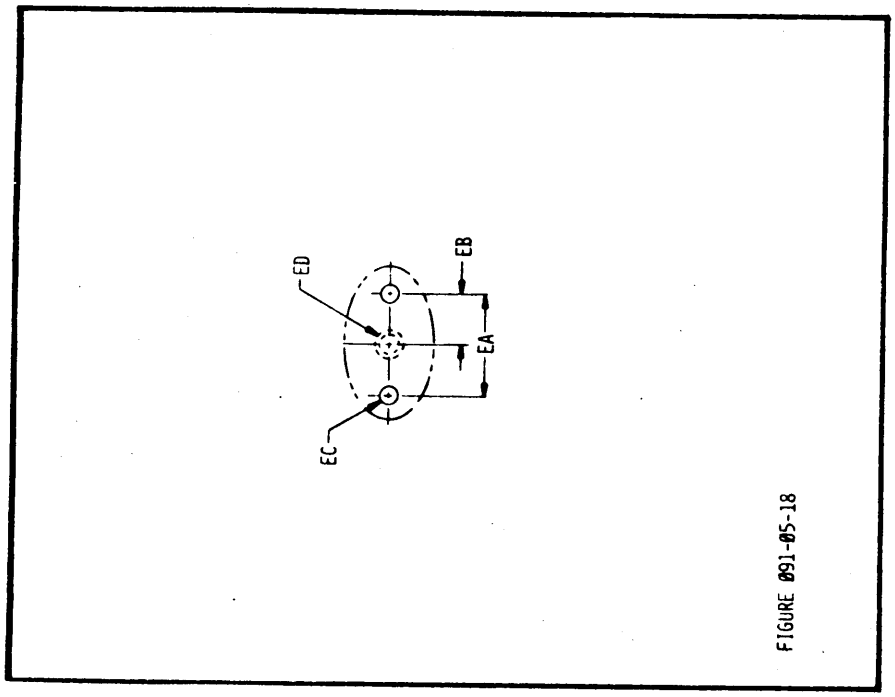


FIGURE 091-05-18



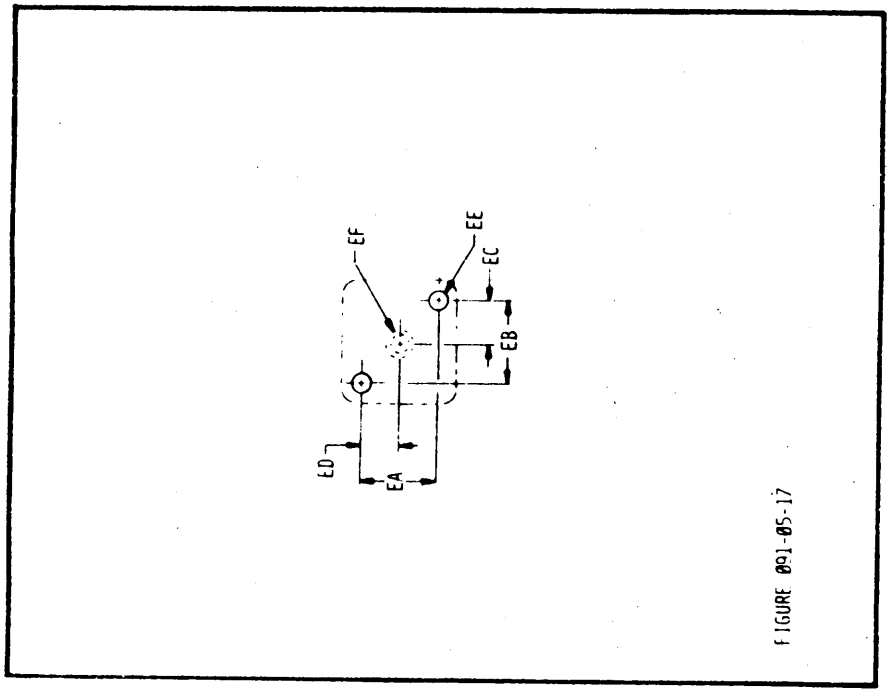


FIGURE 091-05-17

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

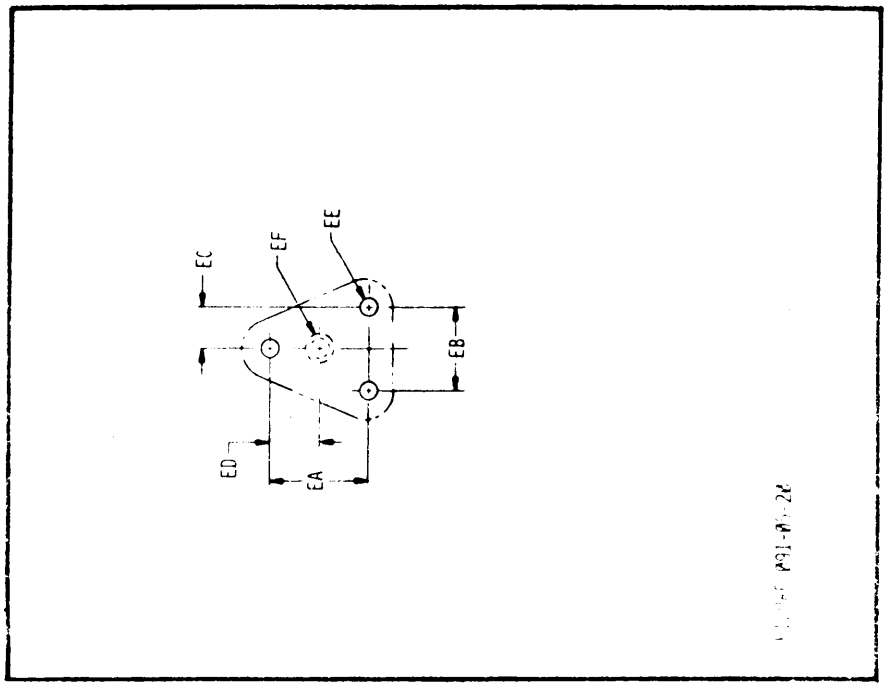

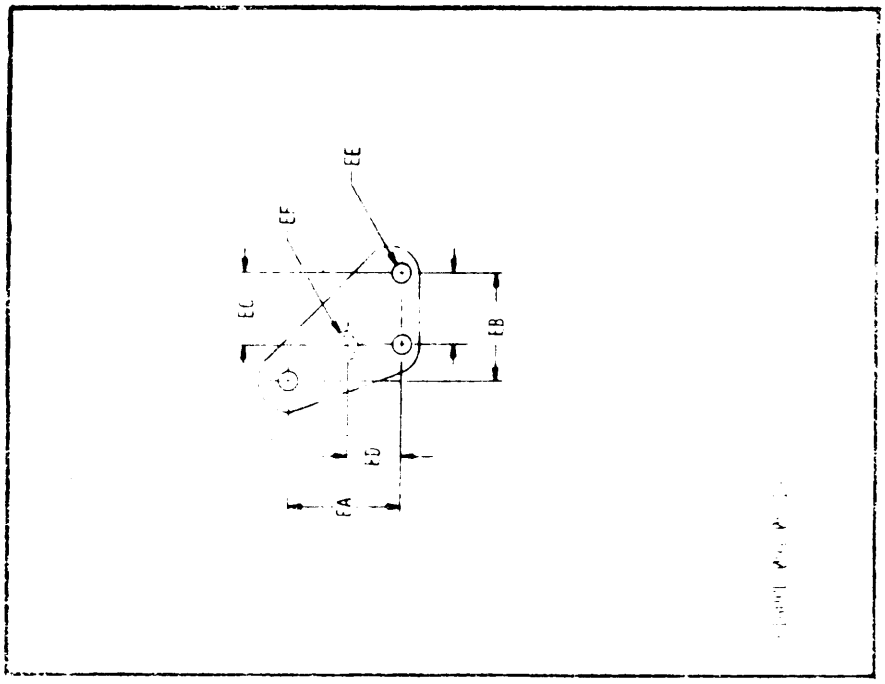

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 8

TABLES

Tables contained in MIL-STD-35 are applicable to Microwave/Waveguide Components.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY

LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. READOUT CALIBRATION

(See 5.11.2)

SCALE INCREMENT (db max)	db RANGE
CODE	CODE
1614	1615
1616	1617
1618	1619
1620	1621
1622	1623
1624	1625

TABLE II. ATTENUATION ACCURACY

(See 5.11.3)

ATTEN VALUE, db		TEST	ATTEN RANGE, db		ATTEN
MIN	MAX	METHOD	MIN	MAX	ACCURACY, db
CODE	CODE	CODE	CODE	CODE	CODE
2092	2093	2094	2095	2096	2097
			2098	2099	3000
			3001	3002	3003
3004	3005	3006	3007	3008	3009
			3010	3011	3012

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE III. VSWR TEST TABLE

(See 5.9.5)

VSWR	FREQ (MC)	ATTENUATOR db SETTINGS				
CODE	CODE	CODE	CODE	CODE	CODE	CODE
3125	2032	2033	2034	2035	2036	2037
3126	2038	2039	2040	2041	2042	2043
3127	2044	2045	2046	2047	2048	2049
3128	2050	2051	2052	2053	2054	2055
3129	2056	2057	2058	2059	2060	2061
3130	2062	2063	2064	2065	2066	2067
3131	2068	2069	2070	2071	2072	2073
3132	2074	2075	2076	2077	2078	2079
3133	2080	2081	2082	2083	2084	2085
3134	2086	2087	2088	2089	2090	2091

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET___ OF ___

TITLE CODE | REQUESTER NO.

1 2 3 4 5 6 7 8 9 10 11 12

THIS FORM IS USED TO INITIATE A REQUEST FOR AN AEDPS DOCUMENT (SEE PARAGRAPH TITLED SPECIFICATIONS REQUIREMENT SHEET, SECTION 5 OF MIL-STD-35).

MARK IF APERTURE CARDS REQUIRED ☐

MARK IF SEARCH ONLY ☐

REVISION TO AEDPS DOCUMENT NO.:

REQUESTER'S NAME _____

MAILING ADDRESS _____

_____

PHONE NO. A/C _____

MICROWAVE/WAVEGUIDE COMPONENTS CHARACTERISTIC NAME	CHAR CODE 13 14 15 16	CHARACTERISTIC VALUE 20 25 30 35 40 45 50 55 60 65 70 75 79	LINE NO. 80
FREQUENCY RANGE (ALL COMPONENTS)	1 5 9 Ø		
POWER AVERAGE RATING (ATTENUATORS, SWITCHES)	1 5 9 5		
POWER PEAK RATING (ATTENUATORS, SWITCHES)	1 5 9 6		
DIRECTIONAL TYPE (COUPLERS) (SELECT APPROPRIATE CODE)			
POWER AVERAGE RATING (COUPLERS)	1 6 5 5		
POWER PEAK RATING (COUPLERS)	1 6 5 6		
POWER SECONDARY AVERAGE REFLECTED (COUPLERS)	1 6 5 7		
COAXIAL END COUPLING UG-EQUIVALENT (ADAPTERS)	1 6 Ø 6		
COAXIAL END COUPLING MATING UG- (ADAPTERS)	1 6 Ø 7		
ACTUATION (SWITCHES) (SELECT APPROPRIATE CODE)			
COUPLING (SWITCHES)	1 6 8 2		

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D C
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Missile Command
Attn: AMSMI-RCS
Redstone Arsenal, AL 35809

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

TO DETACH THIS FORM, CUT ALONG THIS LINE.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.