MIL-STD-35-80(MI)
11 MARCH 1975

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

BELTS, TRANSMISSION AND CONVEYOR

FSC-EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL COMMAND
Washington, D.C. 20315

Automated Engineering
Document Preparation System,
Belts, Transmission and Conveyor

MIL-STD-35-80(MI)

1. This Military Standard is approved by the U.S. Army Materiel Command, Department of the Army, and is mandatory for use by all its activities. All other military activities are required to employ this Standard where suitable.

2. Recommended corrections, additions or deletions should be addressed to Commander, U.S. Army Missile Command, ATTN: AMSMI-RCS, Redstone Arsenal, Alabama 35809.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

MIL-STD-35-80(MI)

FOREWORD

1. The purpose of MIL-STD-35-80(MI) is to facilitate the preparation of Military Specification, Exceptions for Belts, Transmission and Conveyor.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the basic MIL-STD-35, along with MIL-STD-35-1 for Materials, and MIL-STD-35-2 for Finishes.

3. It is important that the procedure described in the basic document (MIL-STD-35C) and subsequent revisions be followed explicitly in order for the computer to produce a document suitable for competitive procurement. Information which is standard for all dash numbered parts has been included in the basic document at the issuance of MIL-STD-35C. This information is not repeated in each dash numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS

SECTION	TITLE	PAGE
SECTION 1	INTRODUCTION	1-1
1.1	Scope	1-1
1.2	Purpose	1-1
1.3	Format	1-1
1.4	Military Specification, Exception Title Index	1-2
1.4.1	Title	1-2
1.4.2	Index	1-3
SECTION 2	APPLICABLE DOCUMENTS	2-1
SECTION 3	DEFINITIONS	3-1
SECTION 4	GENERAL DESCRIPTION OF AEDPS	4-1
SECTION 5	DETAILED DESCRIPTION OF AEDPS	5-1
5.1	Introduction	5-1
5.2	Specification Requirement Sheet (SRS)	5-1
5.3	Specification Requirements	5-1
5.4	Code 1006 Requirements and Test Methods	5-1
5.5	Approved Item Name Code	5-2
5.6	Dimensions and Figures	5-3
5.7	Applicable Documents	5-3
5.8	Tabulation	5-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS (CONT)

SECTION	TITLE	INSTR PAGE	SRL PAGE
5.9	Reference Military Part Number	5-5	5-25
5.10	Configuration	5-5	5-25
5.11	Performance Characteristics	5-5	5-25
5.12	Physical Characteristics	5-6	5-26
5.13	Construction	5-8	5-28
5.14	Weight	5-10	5-31
5.15	Absorption	5-10	5-32
5.16	Adhesion (Before Aging)	5-11	5-33
5.17	Adhesion (After Aging)	5-12	5-35
5.18	Belt Bottom Clearance	5-13	5-36
5.19	Belt Rideout	5-13	5-37
5.20	Cracking (Leather Belting)	5-13	5-37
5.21	Dimensional Tests (For Flat Belting)	5-14	5-38
5.22	Effective Length	5-15	5-39
5.23	Electrical Conductance/Resistivity	5-15	5-40
5.24	Elongation	5-16	5-41
5.25	Fatigue Resistance	5-18	5-43
5.26	Fungus	5-19	5-44
5.27	Piping (Leather Belting)	5-20	5-45
5.28	Straightness (Leather Belting)	5-20	5-46

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS (CONT)

SECTION	TITLE	INSTR PAGE	SRL PAGE
5.29	Temperature Resistance	5-21	5-47
5.30	Tensile Strength	5-22	5-49
SECTION 6	USE OF AEDPS	6-1	
6.1	Procedure	6-1	
SECTION 7	FIGURES	7-1	
SECTION 8	TABLES	8-1	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT
PREPARATION SYSTEM (AEDPS)

SECTION 1

INTRODUCTION

1.1 Scope

This dash numbered part of the Automated Engineering Document Preparation System, MIL-STD-35, covers detailed requirements of Belts, Transmission and Conveyor.

1.2 Purpose

The purpose of this dash numbered part of MIL-STD-35 is to provide a requester necessary information to properly prepare a request for a Belts, Transmission and Conveyor Military Specification, Exception (MSE).

1.3 Format

The requester will find it impossible to complete an SRS using only this dash numbered part of MIL-STD-35. Specification requirements which are standard for all generic families have been included in the master document at the issuance of MIL-STD-35C. These specification requirements are not repeated in each dash numbered part. The following list contains subjects from MIL-STD-35C which are pertinent to every family unless otherwise excepted.

General Description of AEDPS
Part Numbering
Specification Requirements Sheet
Writing Methodology
Mandatory Specification Requirements
General Specification Requirements
Dimensions and Drawings
Applicable Documents
Materials
Finishes
Inspections
Single and Multi-Item Specifications (Tabulation)
Sources
Search
General Instructions for SRL
Tables A through S

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currenversion before use.

1.4 Military Specification, Exception Title Index

1.4.1 Title

The title of the generated MSE must be selected from one of the titles listed in the Military Specification Exception Title Index (see 1.4.2). If a suitable title is not found in the Military Specification Exception Title Index, a request should be forwarded to USAMICOM, ATTN: AMSMI-RCS, along with the desired title, and the related document. A code will be assigned and the code, title, and related document will be made a part of the Military Specification Exception Title Index. The requester will be notified of the code assigned.

One of the six-digit characteristic value codes, listed in the CODE column of the Military Specification Exception Title Index, entered on a Specification Requirements Sheet (SRS), will specify that the title of the MSE will be the title shown with that code in the index. Each MSE title listed in the index is compatible with the document(s) listed with that title in the RELATED DOCUMENT column. The list may or may not be a complete listing.

The information contained in the RELATED DOCUMENT COVERAGE column is intended for the requester's reference; when more than one document is listed for a title, this information will be found useful in determining which of the documents is most suitable for use as the applicable General Specification.

The MSE title uses the basic federal item name listed in Cataloging Handbook H6. Titles with additional modifying and identifying words are provided to assist a designer in defining the scope of the MSE. To allow the designer flexibility, the title is generally not as restrictive as the basic specification to which the exception is taken. The reverse AEDPS title comprises the words that will appear in the Scope paragraph (1.1) of the MSE.

If the item selected from the AEDPS document becomes an item of supply, then the Cataloging Handbook H6 nomenclature must be used.

The MSE title may or may not be the same as the title used in DODISS, FIIG or the document to which the MSE document was written. Documents referenced in the MSE that will be listed in the Applicable Documents paragraph (2.1) of the MSE will be identified by the exact title that appears on the referenced document. The title written on the MSE or in DODISS or FIIG will not be entered in paragraph 2.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1.4.2 Index

The Military Specification Exception Title Index is as follows:

CODE	TITLE	RELATED DOCUMENT	RELATED DOCUMENT COVERAGE
318001	Belting, Cleated, with Guide Strip	MS39281	Rubber Covered, Fully Molded, Conveyor, for Ditching Machine
318002	Belting, Flat	MIL-B-52761	Conveyor, Rubber, Industrial Synthetic Reinforcement
		JJ-B-191	Conveyor or Power Transmission, Cotton (Solid Woven)
		KK-B-201	Leather, Vegetable Tanned
		ZZ-B-206	Conveyor, Rubber
318003	Belting, Round	JJ-B-00178	Dental Engine, Power Transferral
		KK-B-211	Leather
318004	Belting, Stiched Duck	DDD-B-166 DDD-B-171	Conveyor or Power Transmission
318005	Belting, V	ZZ-B-220	Adjustable Link
		MIL-B-11040 ZZ-B-190	Engine Accessory Drive
		MS51065	0.380 Inch Nominal Width
		MS51066	0.500 Inch Nominal Width
		MS51067	11/16 Inch Nominal Width

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CODE	TITLE	RELATED DOCUMENT	RELATED DOCUMENT COVERAGE
318005 (Cont)	Belting, V (Cont)	MS51068	3/4 Inch Nominal Width
		MS51069	7/8 Inch Nominal Width
		MS51070	1-Inch Nominal Width
		ZZ-B-225	Industrial, Multiple Drive
		MS39255	Cross Section "A"
		MS39256	Cross Section "B"
		MS39257	Cross Section "C"
		MS39258	Cross Section "D"
		MS39259	Cross Section "E"
		ZZ-B-195	Industrial, Endless Narrow, Single, and Multiple Drive
		MS39277	Cross Section 3V
		MS39278	Cross Section 5V
		MS39279	Cross Section 8V
		ZZ-B-215	Fractional-Horsepower (Light Duty)
		MS39240	Cross Section 2L
		MS39241	Cross Section 3L
		MS39242	Cross Section 4L
		MS39243	Cross Section 5L

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CODE	TITLE	RELATED DOCUMENT	RELATED DOCUMENT COVERAGE
318006	Conveyor Belting	MIL-B-52761	Flat Belting, Rubber, Industrial, Synthetic Reinforcement
		MS39281	Cleated Belting, Guide Strip, Rubber Covered, Fully Molded for Ditching Machine
		DDD-B-166 DDD-B-171	Stitched Duck Belting
		JJ-B-191	Flat Belting, Cotton (Solid Woven)
		ZZ-B-206	Conveyor, Rubber
318007	Transmission Belting	ZZ-B-220	V-Belting, Adjustable Link
		MIL-B-11040 ZZ-B-190	V-Belting, Engine Accessory Drive
		MS51065	0.380 Inch Nominal Width
		MS51066	0.500 Inch Nominal Width
		MS51067	11/16 Inch Nominal Width
		MS51068	3/4 Inch Nominal Width
		MS51069	7/8 Inch Nominal Width
		MS51070	1-Inch Nominal Width
		ZZ-B-225	V-Belting, Industrial, Multiple Drive
		MS39255	Cross Section "A"
		MS39256	Cross Section "B"

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CODE	TITLE	RELATED DOCUMENT	RELATED DOCUMENT COVERAGE
318007 (Cont)		MS39257	Cross Section "C"
		MS39258	Cross Section "D"
		MS39259	Cross Section "E"
		ZZ-B-195	V-Belting, Endless, Narrow, Single, and Multiple Drive
		MS39277	Cross Section 3V
		MS39278	Cross Section 5V
		MS39279	Cross Section 8V
		DDD-B-166 DDD-B-171	Stitched Duck Belting
		KK-B-211	Round Belting, Leather
		ZZ-B-215	V-Belting, Fractional-Horsepower (Light Duty)
		MS39240	Cross Section 2L
		MS39241	Cross Section 3L
		MS39242	Cross Section 4L
		MS39243	Cross Section 5L
		JJ-B-00178	Round Belting, Dental Engine, Power Transferral
		JJ-B-191	Flat Belting, Cotton (Solid Woven)
		KK-B-201	Flat Belting, Leather, Vegetable Tanned

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 2

APPLICABLE DOCUMENTS

The following documents form a part of this Standard to the extent specified herein.

SPECIFICATIONS

FEDERAL

JJ-B-191	Belting, Flat, Conveyor or Power Transmission, Cotton (Solid Woven)
KK-B-201	Belting; Flat, Leather, Vegetable-Tanned
ZZ-B-195	Belts, V: Industrial Drive, Narrow Type
ZZ-B-220	Belting, V, Adjustable Link

MILITARY

MIL-B-11040	Belt, V: Engine Accessory Drive

STANDARDS

FEDERAL

FED-STD-191	Textile Test Methods
FED-STD-311	Leather, Methods of Sampling and Testing
FED-STD-406	Plastics: Methods of Testing
FED-STD-601	Rubber, Sampling and Testing

MILITARY

MIL-STD-810	Environmental Test Methods

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

OTHER PUBLICATIONS

ASTME380	Metric Practice Guide

HANDBOOKS

H6	Federal Item Name Directory for Supply Cataloging

(Copies of Standards and Handbooks required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 3

DEFINITIONS

Definitions contained in MIL-STD-35 are applicable to Belts, Transmission and Conveyor.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 4

GENERAL DESCRIPTION OF AEDPS

The general description of AEDPS contained in MIL-STD-35 is applicable to Belts, Transmission and Conveyor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 5

DETAILED DESCRIPTION OF AEDPS

5.1 Introduction

The detailed description of AEDPS applicable to Belts, Transmission and Conveyor consists of the following:

a. The detailed description of AEDPS specified in MIL-STD-35.

b. The additional detailed description contained in this section.

5.2 Specification Requirement Sheet (SRS)

Each request for a MSE shall be submitted on an SRS. The preferred forms are the modified 80 column keypunch forms shown in MIL-STD-35. It is expected that copies, as required, of the SRS form will be reproduced locally.

A detailed description of the SRS and its use, contained in MIL-STD-35, is applicable to Belts, Transmission and Conveyor.

5.3 Specification Requirements

All specification requirements described in MIL-STD-35 are applicable to Belts, Transmission and Conveyor.


Refer to ASTME380 for guidance in using the International System of Units (SI).

5.4 Code 1006 Requirements and Test Methods

Many requirements and test methods are shown on the SRL as "Requirements per 1006 document" or "Test per 1006 document" with an adjacent code for each. The adjacent code, entered on the SRS with an "X", will cause the MSE to state that the requirement or test method be in accordance with the document to which exception is being taken.

Similarly, many requirements and test methods are shown on the SRL as "Requirements per 1006 document except" or "Test per 1006 document except" with an adjacent code for each. This adjacent code, entered on the SRS with the exact words desired to complete the statement shown, will specify a complete statement. Only the words required to complete the statement after the "except" are entered on the SRS. (Example 1.)

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

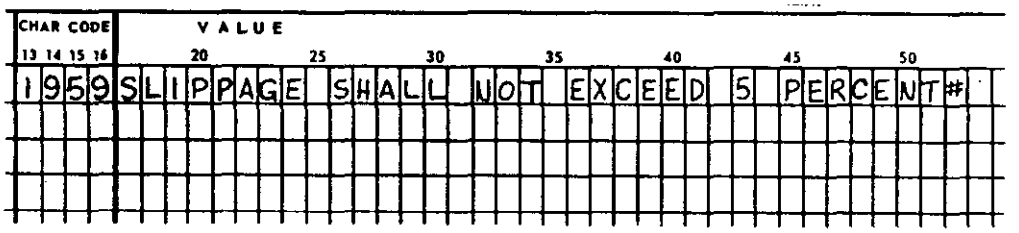

EXAMPLE 1.

In Example 1, the code and entry will generate a paragraph as follows:

"FATIGUE RESISTANCE. WHEN TESTED AS SPECIFIED IN THE FATIGUE RESISTANCE TEST IN SECTION 4, THE REQUIREMENTS SHALL BE IN ACCORDANCE WITH THE SPECIFICATION REFERENCED IN 3.1 EXCEPT SLIPPAGE SHALL NOT EXCEED 5 PERCENT."

The test method per 1006 code and requirements per 1006 code from the same test shall not be used together. This condition would indicate no exception is being specified. If a test method code(s) has been selected, it is mandatory that a requirement code be selected; and if a requirement code has been selected, it is mandatory that a test method code(s) be selected.

5.5 Approved Item Name Code

The approved item name code to be entered on the SRS with Code 1007 for a Belt is selected from the following list:

APPROVED ITEM NAME	ITEM NAME CODE
Belting, Flat	06441
Belting, Round	06443
Belting, V, Adjustable Link	04481
Belting, V	04480
Belt, Flat	06440
Belt, Positive Drive	19541
Belt, Round	06442
Belt, V	04479
Belts, V, Matched Set	19147
Unapproved Name	77777

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Only the Item Name Code number is entered on the SRS with Code 1007.

5.6 Dimensions and Figures

All specification requirements for dimensions and figures described in MIL-STD-35 are applicable.

The figures applicable to Belts, Transmission and Conveyor are contained in Section 7. It is mandatory to enter on the SRS Code 1009 and a figure number.

5.7 Applicable Documents

The documents listed in the Applicable Document List of Section 5 of MIL-STD-35 and appropriate codes from Table B of MIL-STD-35 shall be entered on the SRS. In addition, the appropriate documents shown in the DOCUMENTS column below and applicable codes from Table B of MIL-STD-35 shall be entered on the SRS when the codes listed in the CODES column are used to specify tests or requirements. Shown parenthetically in the CODES column is a reference to the applicable test or requirement.

DOCUMENTS	CODES
FED-STD-191	1653 thru 1658 (Thread Count) 1659 (Size Yarn)
ZZ-B-195	1675 (Effective Length) 1730 (Belt Bottom Clearance) 1910 (Electrical Resistivity)
MIL-B-11040	1710 (Belt Rideout) 1911 (Electrical Conductance) 1920 (Temperature Resistance) 1951 (Fatigue Resistance)
FED-STD-601	1750 thru 1754 (Dimensional Tests for Flat Non-leather Belting) 1770 (Tensile Strength for Non-leather Belting) 1800 (Elongation for Non-leather Belting) 1850 (Adhesion Before Aging, Non-plastic Belting) 1890 (Adhesion After Aging, Non-plastic Belting)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

DOCUMENTS	CODES
FED-STD-311	1755, 1756, 1761 (Dimensional Tests for Flat Leather Belting) 1775 (Tensile Strength for Leather Belting) 1806 (Elongation for Leather Belting) 2022 (Cracking, Leather Belting) 2042 (Piping, Leather Belting)
FED-STD-406	1856 (Adhesion Before Aging for Plastic Belting)
JJ-B-191	1891 (Adhesion After Aging, Plastic Belting) 1982 (Absorption, Water)
MIL-STD-810	4755 (Fungus)
ZZ-B-220	1984 (Absorption, Oil)
KK-B-201	2072 (Straightness, Leather Belting)

5.8 Tabulation

All specification requirements for tabulation described in MIL-STD-35 are applicable.

Characteristics in this dash numbered part that are candidates for tabulation are contained in the following list. Only characteristic codes from this list shall be entered on the SRS with codes from the Specification Requirement Sheet Tabulation Table of MIL-STD-35.

TABULATION CANDIDATES FOR BELTS, TRANSMISSION AND CONVEYOR

CHARACTERISTICS	CODES
Number of Teeth	1577
Number of Belts per Set	1600

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.9 Reference Military Part Number

The Reference Military Part Number is the complete number used by the military to identify a part. This reference part number should be used to identify a similar or common part to which exception will be taken.

Code 1562 and the reference military part number, entered on the SRS, will specify the military designation of the part to be used as a reference in defining the part being specified.

5.10 Configuration

Code 1563 and the number of the figure, entered on the SRS, will specify that the style shall be as shown on this figure.

Code 1564 and the style number from Figure 318-Ø1-1, entered on the SRS, will specify the method of measurement of belt length. For endless belts, Style B, C, or D only may be used.

5.11 Performance Characteristics

There are two codes to specify the operating temperature range and two codes to specify the nonoperating temperature range. Each code may be used independently or all may be entered with values.

Code 5068 and a value, entered on the SRS, will specify the maximum operating temperature in degrees Celsius.

Code 5069 and a value, entered on the SRS, will specify the minimum operating temperature in degrees Celsius.

Code 5070 and a value, entered on the SRS, will specify the maximum nonoperating temperature in degrees Celsius.

Code 5071 and a value, entered on the SRS, will specify the minimum nonoperating temperature in degrees Celsius.

There are eight codes which may be used to specify operative and non-operative altitude in feet or metres. Use only one unit of measure, either feet or metres. These codes and information concerning them are as follows:

Code 5072 or Code 5073 and a value, entered on the SRS, will specify the low operative altitude in feet or metres, respectively.

Source: https://assist.dla.mil -- Downloaded: 2026Ø-26T07:24Z
Check the source to verify that this is the current version before use.

Code 5074 or Code 5075 and a value, entered on the SRS, will specify the high operative altitude in feet or metres, respectively.

Code 5076 or Code 5077 and a value, entered on the SRS, will specify the low nonoperative altitude in feet or metres, respectively.

Code 5078 or Code 5079 and a value, entered on the SRS, will specify the high nonoperative altitude in feet or metres, respectively.

There are two codes which may be used to specify the rated tension of a belt. Only one of these codes should be used. These codes and information concerning them are as follows:

Code 1570 and a value, entered on the SRS, will specify the rated tension in pounds per inch of belt width.

Code 1571 and a value, entered on the SRS, will specify the rated tension in kilograms per millimetre of belt width.

5.12 Physical Characteristics

Code 1575 and an "X", entered on the SRS, will specify a plain belt base.

Code 1576 and an "X", entered on the SRS, will specify a notched (cogged) belt base.

Code 1577 and a value, entered on the SRS, will specify the number of teeth in the notched (cogged) belt base. Code 1577 shall be used only if Code 1576 is used.

Code 1580 and a value, entered on the SRS, will specify the number (quantity) of plies per carcass.

Code 1581 and a value, entered on the SRS, will specify the number (quantity) of plies per cover.

Code 1590 and a value, entered on the SRS, will specify the minimum skim coat thickness in inches.

Code 1591 and a value, entered on the SRS, will specify the minimum skim coat thickness in millimetres.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1600 and a value, entered on the SRS, will specify the number (quantity) of belts in a multidrive set.

Code 1601 or Code 1602 and a value, entered on the SRS, will specify the maximum difference in effective length between matched sets in inches or millimetres, respectively.

Code 1603 or Code 1604 and a value, entered on the SRS, will specify the number (quantity) of pieces of laps (for leather belting) per foot or per metre, respectively.

There are two codes to specify waterproof treatment. Only one code should be selected. These codes and information concerning them are as follows:

Code 1610 and an "X", entered on the SRS, will specify that the belt shall be treated for the purpose of waterproofing it.

Code 1611 and an "X", entered on the SRS, will specify that the belt shall not be treated for waterproofing.

There are seven codes to specify the impregnation to be used on the belt. Only one code should be selected. These codes and information concerning them are as follows:

Code 1615 and an "X", entered on the SRS, will specify that the belt shall be impregnated with synthetic rubber.

Code 1616 and an "X", entered on the SRS, will specify that the belt shall be impregnated with natural rubber.

Code 1617 and an "X", entered on the SRS, will specify that the belt shall be impregnated with a synthetic/natural rubber mixture.

Code 1618 and an "X", entered on the SRS, will specify that the synthetic/natural rubber mixture shall contain black pigmentation. Code 1618 or Code 1619 is mandatory if Code 1617 is used.

Code 1619 and an "X", entered on the SRS, will specify that the synthetic/natural rubber mixture shall contain white pigmentation. Code 1618 or Code 1619 is mandatory if Code 1617 is used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1620 and an "X", entered on the SRS, will specify that the belt shall be impregnated with wax.

Code 1621 and an "X", entered on the SRS, will specify that the belt shall be impregnated with bituminous.

To specify additional physical and chemical tests and requirements for leather belting, the appropriate code(s) from Table I are to be entered on the SRS followed by the appropriate value.

5.13 Construction

Code 1625 and a value, entered on the SRS, will specify the maximum number (quantity) of longitudinal seams per ply.

Code 1626 or Code 1627 and a value, entered on the SRS, will specify the minimum distance in inches or millimetres, respectively, of the longitudinal seams from the belt edge.

Code 1630 or Code 1631 and a value, entered on the SRS, will specify the minimum distance in inches or millimetres, respectively, between longitudinal seams of the same ply.

Code 1635 or Code 1636 and a value, entered on the SRS, will specify the minimum distance in inches or millimetres, respectively, from longitudinal seams in other plies.

Code 1640 and a value, entered on the SRS, will specify the maximum number (quantity) of transverse seams per ply for the length of belt specified with Code 1641 or Code 1642.

Code 1641 or Code 1642 and a value, entered on the SRS, will specify the units of the length of belt in feet or metres, respectively, for which the number of seams is specified with Code 1640. Code 1641 or Code 1642 is mandatory if Code 1640 is used.

Code 1648 and a value, entered on the SRS, will specify the angle in degrees that the transverse seams make with the belt centerline.

Code 1649 or Code 1650 and a value, entered on the SRS, will specify the minimum distance in inches or millimetres, respectively, between transverse seams of the same ply.

Code 1651 or Code 1652 and a value, entered on the SRS, will specify the minimum distance in inches or millimetres, respectively, from transverse seams in other plies.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

There are three codes which may be used to specify the thread count in accordance with Method 5050 of FED-STD-191. More than one code may be used. These codes and information concerning them are as follows:

Code 1653 and a value, entered on the SRS, will specify the minimum number of thread ends per ply in the ply warp contained in one inch of belt width.

Code 1654 and a value, entered on the SRS, will specify the minimum number of thread ends per ply in the ply warp contained in one millimetre of belt width.

Code 1655 and a value, entered on the SRS, will specify the minimum number of thread ends per ply in the binder warp contained in one inch of belt width.

Code 1656 and a value, entered on the SRS, will specify the minimum number of thread ends per ply in the binder warp contained in one millimetre of belt width.

Code 1657 and a value, entered on the SRS, will specify the minimum number of filling threads per ply in one inch of belt width.

Code 1658 and a value, entered on the SRS, will specify the minimum number of filling threads per ply in one millimetre of belt width.

Code 1659 and a value, entered on the SRS, will specify the thread size yarn number in accordance with Method 4020 of FED-STD-191.

Code 1660 or Code 1661 and a value, entered on the SRS, will specify the thread breaking strength in pounds or kilograms, respectively.

There are four codes which may be used to specify belt stitching. More than one code may be used. These codes and information concerning them are as follows:

Code 1662 and a value, entered on the SRS, will specify the number (quantity) of stitches per linear foot.

Code 1663 and a value, entered on the SRS, will specify the number (quantity) of stitches per linear meter.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1667 or Code 1668 and a value, entered on the SRS, will specify the separation (distance apart) of the stitched rows in inches or millimetres, respectively.

Code 1669 and a value, entered on the SRS, will specify the number (quantity) of stitched rows per ply.

5.14 Weight (Maximum)

There are four codes which may be used to specify the maximum weight of the belt. Only one code may be used. These codes and information concerning them are as follows:

Code 1695 and a value, entered on the SRS, will specify the maximum weight of the belting in pounds per square yard.

Code 1696 and a value, entered on the SRS, will specify the maximum weight of the belting in ounces per square inch.

Code 1697 and a value, entered on the SRS, will specify the maximum weight of the belting in grams per square millimetre.

Code 1698 and a value, entered on the SRS, will specify the maximum weight of the belting in kilograms per square metre.

Code 1699 and a value, entered on the SRS, will specify the maximum weight of a continuous belt in pounds.

Code 1700 and a value, entered on the SRS, will specify the maximum weight of a continuous belt in ounces.

Code 1701 and a value, entered on the SRS, will specify the maximum weight of a continuous belt in grams.

Code 1702 and a value, entered on the SRS, will specify the maximum weight of a continuous belt in kilograms.

5.15 Absorption

Code 1980 is the 1006 test code (5.4).

Code 1981 is the 1006 except test code (5.4).

Code 1982 and an "X", entered on the SRS, will specify to test for water absorption in accordance with JJ-B-191.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1983 and a value, entered on the SRS, will specify the duration in hours of the immersion in water. Use Code 1983 only if Code 1982 is used.

Code 1984 and an "X", entered on the SRS, will specify to test for oil absorption in accordance with ZZ-B-220.

If Code 1984 is used, three codes are available for specifying details of the test. These codes and information concerning them are as follows:

Code 1985 and a value, entered on the SRS, will specify the duration in hours of the immersion in oil.

Code 1987 and a value, entered on the SRS, will specify the temperature of the oil in degrees Celsius.

Code 1988 and a value, entered on the SRS, will specify the tolerance (±) of the oil temperature in degrees Celsius.

Code 2000 is the 1006 requirement code (5.4).

Code 2001 is the 1006 except requirement code (5.4).

Code 2002 and a value, entered on the SRS, will specify the maximum increase in weight in percent due to water absorption.

Code 2003 and a value, entered on the SRS, will specify the minimum increase in weight in percent due to water absorption.

Code 2004 and an "X", entered on the SRS, will specify that there shall be no evidence of shrinkage in width or thickness due to oil absorption.

Code 2005 and a value, entered on the SRS, will specify the maximum increase in width and thickness in percent due to oil absorption.

5.16 Adhesion (Before Aging)

Code 1848 is the 1006 test code (5.4).

Code 1849 is the 1006 except test code (5.4).

Code 1850 and an "X", entered on the SRS, will specify to test non-plastic belting in accordance with Method 8011 of FED-STD-601.

Code 1856 and an "X", entered on the SRS, will specify to test plastic belting in accordance with Method 1131 of FED-STD-406.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1858 is the 1006 requirement code (5.4).

Code 1859 is the 1006 except requirement code (5.4).

Code 1860 and a value, entered on the SRS, will specify the minimum adhesive strength, in pounds per inch of width, between the belting cover and the plies.

Code 1861 and a value, entered on the SRS, will specify the minimum adhesive strength, in kilograms per millimetre of width, between the belting cover and the plies.

Code 1875 and a value, entered on the SRS, will specify the minimum adhesive strength, in pounds per inch of width, between plies.

Code 1876 and a value, entered on the SRS, will specify the minimum adhesive strength, in kilograms per millimetre of width, between plies.

5.17 Adhesion (After Aging)

Code 1888 is the 1006 test code (5.4).

Code 1889 is the 1006 except test code (5.4).

Code 1890 and an "X", entered on the SRS, will specify to test non-plastic belting in accordance with Method 7221 of FED-STD-601.

Code 1891 and an "X", entered on the SRS, will specify to test plastic belting in accordance with JJ-B-191.

Code 1893 is the 1006 requirement code (5.4).

Code 1894 is the 1006 except requirement code (5.4).

Code 1895 and a value, entered on the SRS, will specify the minimum adhesive strength, in pounds per inch of width, between the belting cover and the plies.

Code 1896 and a value, entered on the SRS, will specify the minimum adhesive strength, in kilograms per millimetre of width, between the belting cover and the plies.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1897 and a value, entered on the SRS, will specify the minimum adhesive strength, in pounds per inch of width, between plies.

Code 1898 and a value, entered on the SRS, will specify the minimum adhesive strength, in kilograms per millimetre of width, between plies.

Code 1899 or Code 1900 and a value, entered on the SRS, will specify the minimum deflection of the belting in inches or millimetres, respectively.

5.18 Belt Bottom Clearance

Code 1728 is the 1006 test code (5.4).

Code 1729 is the 1006 except test code (5.4).

Code 1730 and an "X", entered on the SRS, will specify to test in accordance with ZZ-B-195.

Code 1733 is the 1006 requirement code (5.4).

Code 1734 is the 1006 except requirement code (5.4).

Code 1735 or Code 1736 and a value, entered on the SRS, will specify the minimum belt bottom clearance in inches or millimetres, respectively.

5.19 Belt Rideout

Code 1708 is the 1006 test code (5.4).

Code 1709 is the 1006 except test code (5.4).

Code 1710 and an "X", entered on the SRS, will specify to test in accordance with MIL-B-11040.

Code 1713 is the 1006 requirement code (5.4).

Code 1714 is the 1006 except requirement code (5.4).

Code 1715 or Code 1716 and a value, entered on the SRS, will specify the maximum belt rideout in inches or millimetres, respectively.

5.20 Cracking (Leather Belting)

Code 2020 is the 1006 test code (5.4).

Code 2021 is the 1006 except test code (5.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 2022 and an "X", entered on the SRS, will specify to test in accordance with Method 4021 of FED-STD-311.

If Code 2022 is used, two codes are available for specifying the diameter of the mandrel. Only one of these codes should be used. These codes and information concerning them are as follows:

Code 2023 and a value, entered on the SRS, will specify the diameter of the mandrel in inches.

Code 2024 and a value, entered on the SRS, will specify the diameter of the mandrel in millimetres.

Code 2030 is the 1006 requirement code (5.4).

Code 2031 is the 1006 except requirement code (5.4).

Code 2032 and an "X", entered on the SRS, will specify that the belting shall not crack.

5.21 Dimensional Tests (For Flat Belting)

Code 1748 is the 1006 test code (5.4).

Code 1749 is the 1006 except test code (5.4).

Code 1750 or Code 1751 and a value, entered on the SRS, will specify that the length of non-leather belting shall be determined as described in Method 2411 of FED-STD-601 and will also specify the accuracy of the scale, in inches or millimetres, respectively, to be used in measuring the belt length.

Code 1752 or Code 1753 and a value, entered on the SRS, will specify that the width of non-leather belting shall be determined as described in Method 2121 of FED-STD-601 and will specify the measurement interval in feet or metres, respectively.

Code 1754 and an "X", entered on the SRS, will specify that the thickness of non-leather belting shall be determined as described in Method 2111 of FED-STD-601.

Code 1755 and an "X", entered on the SRS, will specify that the length of leather belting shall be determined as described in Method 1211 of FED-STD-311.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1756 and an "X", entered on the SRS, will specify that the width of leather belting shall be determined as described in Method 1211 of FED-STD-311.

Code 1759 or Code 1760 and a value, entered on the SRS, will specify the accuracy of the scale in inches or millimetres, respectively, to be used in measuring the belt length and/or the belt width. Code 1759 and/or Code 1760 should be used only if Code 1755 or Code 1756 is used.

Code 1761 and an "X", entered on the SRS, will specify that the thickness of leather belting shall be determined as described in Method 1011.1 of FED-STD-311.

5.22 Effective Length

Code 1673 is the 1006 test code (5.4).

Code 1674 is the 1006 except test code (5.4).

Code 1675 and an "X", entered on the SRS, will specify to test in accordance with ZZ-B-195.

If Code 1675 is used, two codes are available for specifying the belt tension. Only one of these codes should be used. These codes and information concerning them are as follows:

Code 1676 and a value, entered on the SRS, will specify the belt tension in pounds.

Code 1677 and a value, entered on the SRS, will specify the belt tension in kilograms.

Code 1682 is the 1006 requirement code (5.4).

Code 1683 is the 1006 except requirement code (5.4).

Code 1685 or Code 1686 and a value, entered on the SRS, will specify the tolerance (+) in inches or millimetres, respectively, for the belt effective length.

Code 1687 or Code 1688 and a value, entered on the SRS, will specify the matching limits in inches or millimetres, respectively, for belts in a matched set.

5.23 Electrical Conductance/Resistivity

Code 1908 is the 1006 test code (5.4).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

Code 1909 is the 1006 except test code (5.4).

Code 1910 and an "X", entered on the SRS, will specify to test for electrical resistivity in accordance with ZZ-B-195.

Code 1911 and an "X", entered on the SRS, will specify to test for electrical conductance in accordance with MIL-B-11040.

If Code 1911 is used, two codes are available for specifying the applied tension force. Only one of these codes should be used. These codes and information concerning them are as follows:

Code 1912 and a value, entered on the SRS, will specify the applied tension force in pounds.

Code 1913 and a value, entered on the SRS, will specify the applied tension force in kilograms.

Code 1914 is the 1006 requirement code (5.4).

Code 1915 is the 1006 except requirement code (5.4).

Code 1916 and a value, entered on the SRS, will specify the maximum electrical resistivity in megohms.

Code 1917 and a value, entered on the SRS, will specify the minimum electrical conductance in micromhos.

5.24 Elongation

Code 1798 is the 1006 test code (5.4).

Code 1799 is the 1006 except test code (5.4).

Code 1800 and an "X", entered on the SRS, will specify to test non-leather belting in accordance with Method 4111 of FED-STD-601.

If Code 1800 is used, four codes are available for specifying details of the test. Code 1802, 1804, or 1805 is mandatory. Code 1803 is mandatory if Code 1802 is used. These codes and information concerning them are as follows:

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1802 and an "X", entered on the SRS, will specify a dumbbell-shaped specimen.

Code 1803 and a number, entered on the SRS, will specify the die (I thru VII) shown in Figure 4111 of MIL-STD-601 which is to be used to cut the test specimen.

Code 1804 and an "X", entered on the SRS, will specify a ring specimen.

Code 1805 and an "X", entered on the SRS, will specify a straight specimen in the form of a tube or rod.

Code 1806 and an "X", entered on the SRS, will specify to test leather belting in accordance with Method 2021 of FED-STD-311.

Code 1818 is the 1006 requirement code (5.4).

Code 1819 is the 1006 except requirement code (5.4).

Code 1820 and a value, entered on the SRS, will specify the maximum warp elongation in percent, of the belting carcass (without cover) at the rated tension of the entire belt.

Code 1822 and a value, entered on the SRS, will specify the minimum warp elongation in percent of the belting carcass (without cover) at the break point of the belt.

Code 1824 and a value, entered on the SRS, will specify the maximum warp elongation of the belting carcass (without cover) in percent.

Code 1825 and a value, entered on the SRS, will specify the percent of the specified breaking strength at which the maximum warp elongation specified with Code 1824 is to be determined. Code 1825 is mandatory if Code 1824 is used.

Code 1826 and a value, entered on the SRS, will specify the minimum ultimate elongation of the belting cover (carrying side) in percent of its original length.

Code 1827 and a value, entered on the SRS, will specify the minimum ultimate elongation, after aging, of the belting cover (carrying side) in percent of its original length.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1829 or Code 1830 and a value, entered on the SRS, will specify the minimum overall thickness in inches or millimetres, respectively, of the belting cover (carrying side) after the elongation test.

Code 1831 or Code 1832 and a value, entered on the SRS, will specify the minimum thickness in inches or millimetres, respectively, of the thinnest portion of the belting cover (carrying side) after the elongation test.

Code 1833 or Code 1834 and a value, entered on the SRS, will specify the minimum thickness in inches or millimetres, respectively, of the belting cover (pulley side) after the elongation test.

Code 1840 and a value, entered on the SRS, will specify the minimum elongation of the finished belt at rated tension, in percent of the original length.

Code 1841 and a value, entered on the SRS, will specify the maximum elongation of the finished belt at rated tension, in percent of the original length.

5.25 Fatigue Resistance

Code 1949 is the 1006 test code (5.4).

Code 1950 is the 1006 except test code (5.4).

Code 1951 and an "X", entered on the SRS, will specify to test in accordance with MIL-B-11040.

If Code 1951 is used, four codes are available for specifying details of the test. None of these codes are mandatory. These codes and information concerning them are as follows:

Code 1952 and a value, entered on the SRS, will specify the driver pulley speed in revolutions per minute.

Code 1953 and a value, entered on the SRS, will specify the dynamometer load in horsepower.

Code 1954 or Code 1955 and a value, entered on the SRS, will specify the tension weight in pounds or kilograms, respectively, at no load.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1958 is the 1006 requirement code (5.4).

Code 1959 is the 1006 except requirement code (5.4).

Code 1960 and an "X", entered on the SRS, will specify that the belt shall not break or fracture.

Code 1961 and a value, entered on the SRS, will specify the maximum belt slippage in percent.

5.26 Fungus

Code 4753 is the 1006 test code (5.4).

Code 4754 is the 1006 except test code (5.4).

Code 4755 and an "X", entered on the SRS, will specify to test in accordance with Method 508 of MIL-STD-810.

If Code 4755 is used, two codes are available for specifying details of the test. Neither of these codes are mandatory. These codes and information concerning them are as follows:

Code 4756 and a value, entered on the SRS, will specify the test period in days.

Code 4757 and an "X", entered on the SRS, will specify that after test, the test item shall be operated and then visually inspected.

Code 4759 is the 1006 requirement code (5.4).

Code 4760 is the 1006 except requirement code (5.4).

Code 4761 and an "X", entered on the SRS, will specify that all external materials shall be non-nutrient to fungus growth or shall be suitably treated to retard fungus growth. The manufacturer shall verify by certification that all materials are fungus resistant or shall perform the fungus test specified. When the specified fungus test is performed, there shall be no evidence of fungus growth on any external surface.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 4762 and an "X", entered on the SRS, will specify that all external materials shall be non-nutrient to fungus growth or shall be suitably treated to retard fungus growth. When the specified fungus test is performed, there shall be no evidence of fungus growth on the external surfaces.

5.27 Piping (Leather Belting)

Code 2040 is the 1006 test code (5.4).

Code 2041 is the 1006 except test code (5.4).

Code 2042 and an "X", entered on the SRS, will specify to test in accordance with Method 4111 of FED-STD-311.

If Code 2042 is used, two codes are available for specifying the diameter of the mandrel. These codes and information concerning them are as follows:

Code 2043 and a value, entered on the SRS, will specify the diameter of the mandrel in inches.

Code 2044 and a value, entered on the SRS, will specify the diameter of the mandrel in millimetres.

Code 2050 is the 1006 requirement code (5.4).

Code 2051 is the 1006 except requirement code (5.4).

Code 2052 and an "X", entered on the SRS, will specify that the belting shall not pipe on either side.

5.28 Straightness (Leather Belting)

Code 2070 is the 1006 test code (5.4).

Code 2071 is the 1006 except test code (5.4).

Code 2072 and an "X", entered on the SRS, will specify to test in accordance with KK-B-201.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

If Code 2072 is used, four codes are available for specifying the intervals of measurement. Only one code should be used. These codes and information concerning them are as follows:

Code 2073 and a value, entered on the SRS, will specify the intervals of measurement in inches.

Code 2074 and a value, entered on the SRS, will specify the intervals of measurement in feet.

Code 2075 and a value, entered on the SRS, will specify the intervals of measurement in millimetres.

Code 2076 and a value, entered on the SRS, will specify the intervals of measurement in metres.

Code 2090 is the 1006 requirement code (5.4).

Code 2091 is the 1006 except requirement code (5.4).

Code 2092 or Code 2093 and a value, entered on the SRS, will specify the maximum curvature in inches or millimetres, respectively.

5.29 Temperature Resistance

Code 1918 is the 1006 test code (5.4).

Code 1919 is the 1006 except test code (5.4).

Code 1920 and an "X", entered on the SRS, will specify to test in accordance with MIL-B-11040.

If Code 1920 is used, eight codes are available for specifying details of the test. None of these codes are mandatory. These codes and information concerning them are as follows:

Code 1921 and a value, entered on the SRS, will specify the high temperature in degrees Celsius.

Code 1922 and a value, entered on the SRS, will specify the tolerance (±) of the high temperature in degrees Celsius.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1923 and a value, entered on the SRS, will specify the high temperature test duration in hours.

Code 1924 or Code 1925 and a value, entered on the SRS, will specify the applied tensional force in pounds or kilograms, respectively.

Code 1926 and a value, entered on the SRS, will specify the low temperature in degrees Celsius.

Code 1927 and a value, entered on the SRS, will specify the tolerance (±) of the low temperature in degrees Celsius.

Code 1928 and a value, entered on the SRS, will specify the low temperature test duration in hours.

Code 1933 is the 1006 requirement code (5.4).

Code 1934 is the 1006 except requirement code (5.4).

Code 1935 and an "X", entered on the SRS, will specify that the belt shall not crack. Code 1935 is mandatory if requirements are to be detailed.

Code 1936 or Code 1937 and a value, entered on the SRS, will specify the maximum torque in pound-feet or kilogram-metre, respectively, required to start rotation of the pulleys.

Code 1938 or Code 1939 and a value, entered on the SRS, will specify the maximum torque in pound-feet or kilogram-metre, respectively, required to continue rotation of the pulleys.

5.30 Tensile Strength

Code 1768 is the 1006 test code (5.4).

Code 1769 is the 1006 except test code (5.4).

Code 1770 and an "X", entered on the SRS, will specify to test non-leather belting in accordance with Method 4111 of FED-STD-601.

If Code 1770 is used, four codes are available for specifying details of the test. Code 1771, 1773 or 1774 is mandatory. Code 1772 is mandatory if Code 1771 is used. These codes and information concerning them are as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1771 and an "X", entered on the SRS, will specify a dumbbell-shaped specimen.

Code 1772 and a number, entered on the SRS, will specify the die (I thru VII) shown in Figure 4111 of MIL-STD-601 which is to be used to cut the test specimen.

Code 1773 and an "X", entered on the SRS, will specify a ring specimen.

Code 1774 and an "X", entered on the SRS, will specify a straight specimen in the form of a tube or rod.

Code 1775 and an "X", entered on the SRS, will specify to test leather belting in accordance with Method 2021 of FED-STD-311.

Code 1778 is the 1006 requirement code (5.4).

Code 1779 is the 1006 except requirement code (5.4).

Code 1780 or Code 1781 and a value, entered on the SRS, will specify the minimum tensile strength of the warp for the belting (without cover) in pounds per ply inch or kilograms per ply millimetre, respectively.

Code 1782 or Code 1783 and a value, entered on the SRS, will specify the minimum tensile strength of the fill for the belting (without cover) in pounds per ply inch or kilograms per ply millimetre, respectively.

Code 1787 or Code 1788 and a value, entered on the SRS, will specify the minimum tensile strength of the belting cover (carrying side) in pounds per square inch or in pascals, respectively.

There are four codes for specifying the tensile strength of the finished belt. Only one code should be used. These codes and information concerning them are as follows:

Code 1791 and a value, entered on the SRS, will specify the minimum tensile strength in pounds per ply inch.

Code 1792 and a value, entered on the SRS, will specify the minimum tensile strength in kilograms per ply millimetre.

Code 1795 and a value, entered on the SRS, will specify the minimum tensile strength in pounds per square inch.

Code 1796 and a value, entered on the SRS, will specify the minimum tensile strength in pascals.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
1.3	Enter on the SRS, requirements from MIL-STD-35	
5.9	Reference Military Part Number	1562
5.10	Configuration	
	Figure (number)	1563
	Measurement per Figure 318-Ø1-1, style (number)	1564
5.11	Performance Characteristics	
	Temperature range:	
	Operating	
	Maximum temperature (degrees C)	5068
	Minimum temperature (degrees C)	5069
	Nonoperating	
	Maximum temperature (degrees C)	5070
	Minimum temperature (degrees C)	5071
	Altitude:	
	Low operative (feet)	5072
	Low operative (metres)	5073
	High operative (feet)	5074
	High operative (metres)	5075

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.11 (Cont)	Performance Characteristics (Cont)	
	Low nonoperative (feet)	5076
	Low nonoperative (metres)	5077
	High nonoperative (feet)	5078
	High nonoperative (metres)	5079
	Rated tension (pounds per inch of belt width)	1570
	Rated tension (kilograms per millimetre of belt width)	1571
5.12	Physical Characteristics	
	Belt base	
	(Select one)	
	Plain.	1575
	Notched (cogged).	1576
	Teeth (number)	1577
	Plies	
	(Select as required)	
	Per carcass (number)	1580
	Per cover (number)	1581

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.12 (Cont)	Physical Characteristics (Cont)	
	Minimum skim coat thickness	
	(Select one)	
	(inches)	1590
	(millimetres)	1591
	Belts in multidrive set (number)	1600
	Matched sets:	
	Maximum difference in effective length between matched sets:	
	(inches)	1601
	(millimetres)	1602
	Laps (for leather belting)	
	Pieces per foot (number)	1603
	Pieces per metre (number)	1604
	Waterproof treatment	
	(Select one)	
	Treated.	1610
	Untreated.	1611

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.12 (Cont)	Physical Characteristics (Cont)	
	Impregnation	
	(Select one)	
	Synthetic rubber.	1615
	Natural rubber.	1616
	Synthetic/natural rubber mixture.	1617
	*Pigmentation:	
	Black	1618
	White	1619
	Wax.	1620
	Bituminous.	1621
	Physical and chemical tests and requirements for leather belting.	Table I
5.13	Construction	
	Longitudinal seams	
	Maximum seams per ply (number)	1625
	Minimum distance from belt edge	
	(inches)	1626
	(millimetres)	1627

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.13 (Cont)	Construction (Cont)	
	Minimum distance between seams same ply	
	(inches)	1630
	(millimetres)	1631
	Minimum distance from seams in other plies	
	(inches)	1635
	(millimetres)	1636
	Transverse seams	
	Maximum seams per ply (number)	1640
	*Per ply length	
	(feet)	1641
	(metres)	1642
	Angle to belt centerline (degrees)	1648
	Minimum distance between seams same ply	
	(inches)	1649
	(millimetres)	1650

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.13 (Cont)	Construction (Cont)	
	Minimum distance from seams in other plies	
	(inches)	1651
	(millimetres)	1652
	Thread count (per FED-STD-191 Method 5050)	
	Minimum per inch belt width in ply warp (number ends per ply)	1653
	Minimum per millimetre belt width in ply warp (number ends per ply)	1654
	Minimum per inch belt width in binder warp (number ends per ply)	1655
	Minimum per millimetre belt width in binder warp (number ends per ply)	1656
	Minimum per inch belt length (number filling threads per ply)	1657
	Minimum per millimetre belt length (number filling threads per ply)	1658
	Thread size (yarn number per FED-STD-191 Method 4020)	1659

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.13 (Cont)	Construction (Cont)	
	Thread breaking strength	
	Minimum (pounds)	1660
	Minimum (kilograms)	1661
	Stitching	
	Stitches per linear foot (number)	1662
	Stitches per linear metre (number)	1663
	Stitched rows distance apart	
	(inches)	1667
	(millimetres)	1668
	Number of stitched rows per ply (number)	1669
5.14	Weight (Maximum)	
	Belting	
	(Select one)	
	(pounds per square yard)	1695
	(ounces per square inch)	1696
	(grams per square millimetre)	1697
	(kilograms per square metre)	1698

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.14 (Cont)	Weight (Maximum) (Cont)	
	Belts, continuous	
	(Select one)	
	(pounds)	1699
	(ounces)	1700
	(grams)	1701
	(kilograms)	1702
5.15	Absorption	
	(Select one test method)	
	Test per 1006 document.	1980
	Test per 1006 document except _____.	1981
	Test as follows:	
	Water	
	Test per JJ-B-191.	1982
	Duration of immersion (hours)	1983
	Oil	
	Test per ZZ-B-220.	1984
	Duration of immersion (hours)	1985

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.15 (Cont)	Absorption (Cont)	
	Temperature of oil:	
	(degrees C)	1987
	± tolerance (degrees C)	1988
	(Select one requirement)	
	Requirement(s) per 1006 document.	2000
	Requirement(s) per 1006 document except _____.	2001
	Requirement(s) as follows:	
	Water:	
	Maximum increase in weight due to water absorption (percent)	2002
	Minimum increase in weight due to water absorption (percent)	2003
	Oil:	
	There shall be no evidence of shrinkage in width or thickness.	2004
	Maximum increase in width and thickness due to oil absorption (percent)	2005
5.16	Adhesion (Before Aging)	
	(Select one test method)	
	Test per 1006 document.	1848
	Test per 1006 document except _____.	1849

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.16 (Cont)	Adhesion (Before Aging) (Cont)	
	Test as follows:	
	Non-plastic belting	
	Test per FED-STD-601 Method 8011	1850
	Plastic belting	
	Test per FED-STD-406 Method 1131	1856
	(Select one requirement)	
	Requirement(s) per 1006 document.	1858
	Requirement(s) per 1006 document except _____.	1859
	Requirement(s) as follows:	
	Adhesive strength between belting cover and plies	
	Minimum (pounds per inch of width)	1860
	Minimum (kilograms per millimetre of width)	1861
	Adhesive strength between plies	
	Minimum (pounds per inch of width)	1875
	Minimum (kilograms per millimetre of width)	1876

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.17	Adhesion (After Aging)	
	(Select one test method)	
	Test per 1006 document.	1888
	Test per 1006 document except _____.	1889
	Test as follows:	
	Non-plastic belting	
	Test per FED-STD-601 Method 7221.	1890
	Plastic belting	
	Test per JJ-B-191.	1891
	(Select one requirement)	
	Requirement(s) per 1006 document.	1893
	Requirement(s) per 1006 document except _____.	1894
	Requirement(s) as follows:	
	Adhesive strength between belting cover and plies	
	Minimum (pounds per inch of width)	1895
	Minimum (kilograms per millimetre of width)	1896

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.17 (Cont)	Adhesion (After Aging) (Cont)	
	Adhesive strength between plies	
	Minimum (pounds per inch of width)	1897
	Minimum (kilograms per millimetre of width)	1898
	Deflecting of belting	
	Minimum (inches)	1899
	Minimum (millimetres)	1900
5.18	Belt Bottom Clearance	
	(Select one test method)	
	Test per 1006 document.	1728
	Test per 1006 document except _____.	1729
	Test per ZZ-B-195.	1730
	(Select one requirement)	
	Requirement(s) per 1006 document.	1733
	Requirement(s) per 1006 document except _____.	1734
	Requirement(s) as follows:	
	Minimum belt bottom clearance (inches)	1735
	Minimum belt bottom clearance (millimetres)	1736

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.19	Belt Rideout	
	(Select one test method)	
	Test per 1006 document.	1708
	Test per 1006 document except _____.	1709
	Test per MIL-B-11040.	1710
	(Select one requirement)	
	Requirement(s) per 1006 document.	1713
	Requirement(s) per 1006 document except _____.	1714
	Requirement(s) as follows:	
	Maximum belt rideout (inches)	1715
	Maximum belt rideout (millimetres)	1716
5.20	Cracking (Leather Belting)	
	(Select one test method)	
	Test per 1006 document.	2020
	Test per 1006 document except _____.	2021
	Test per FED-STD-311 Method 4021.	2022
	Diameter of mandrel (inches)	2023
	Diameter of mandrel (millimetres)	2024

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.20 (Cont)	Cracking (Leather Belting) (Cont)	
	(Select one requirement)	
	Requirement(s) per 1006 document.	2030
	Requirement(s) per 1006 document except _____.	2031
	Requirement(s) as follows:	
	Belting shall not crack.	2032
5.21	Dimensional Tests (For Flat Belting)	
	(Select one test method)	
	Test per 1006 document.	1748
	Test per 1006 document except _____.	1749
	Test as follows:	
	For nonleather belting	
	Length (Test per FED-STD-601 Method 2111)	
	*Scale accuracy	
	(inches)	1750
	(millimetres)	1751
	Width (Test per FED-STD-601 Method 2121)	
	*Measurement intervals:	
	(feet)	1752
	(metres)	1753

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.21 (Cont)	Dimensional Tests (For Flat Belting) (Cont)	
	Thickness (Test per FED-STD-601 Method 2011)	1754
	Leather belting	
	Length (Test per FED-STD-311 Method 1211)	1755
	Width (Test per FED-STD-311 Method 1211)	1756
	Scale accuracy:	
	(inches)	1759
	(millimetres)	1760
	Thickness (Test per FED-STD-311 Method 1011.1)	1761
5.22	Effective Length	
	(Select one test method)	
	Test per 1006 document.	1673
	Test per 1006 document except _____.	1674
	Test per ZZ-B-195.	1675
	Belt tension	
	(pounds)	1676
	(kilograms)	1677

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.22 (Cont)	Effective Length (Cont)	
	(Select one requirement)	
	Requirement(s) per 1006 document.	1682
	Requirement(s) per 1006 document except _____.	1683
	Requirement(s) as follows:	
	Length tolerance	
	± (inches)	1685
	± (millimetres)	1686
	Matching Limits	
	(inches)	1687
	(millimetres)	1688
5.23	Electrical Conductance/Resistivity	
	(Select one test method)	
	Test per 1006 document.	1908
	Test per 1006 document except _____.	1909
	Test per ZZ-B-195.	1910

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.23	Electrical Conductance/Resistivity	
	Test per MIL-B-11040.	1911
	Applied tension force (pounds)	1912
	Applied tension force (kilograms)	1913
	(Select one requirement)	
	Requirement(s) per 1006 document.	1914
	Requirement(s) per 1006 document except _____.	1915
	Requirement(s) as follows:	
	Maximum electrical resistivity (megohms)	1916
	Minimum electrical conductance (micromhos)	1917
5.24	Elongation	
	(Select one test method)	
	Test per 1006 document.	1798
	Test per 1006 document except _____.	1799
	Test as follows:	
	For nonleather belting (Test per FED-STD-601 Method 4111).	1800
	*Test specimen (type)	
	Dumbbell.	1802
	*Die (number)	1803

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.24 (Cont)	Elongation (Cont)	
	Ring.	1804
	Straight.	1805
	For leather belting (Test per FED-STD-311 Method 2021)	1806
	(Select one requirement)	
	Requirement(s) per 1006 document.	1818
	Requirement(s) per 1006 document except _____.	1819
	Requirement(s) as follows:	
	Belting carcass (without cover)	
	Maximum warp elongation at rated tension of entire belt (percent)	1820
	Minimum warp elongation at break point of belt (percent)	1822
	Maximum warp elongation (percent)	1824
	*At _____ percent of specified breaking strength	1825
	Belting cover (carrying side)	
	Minimum ultimate elongation (percent of original length)	1826
	Minimum ultimate elongation (percent of original length after aging)	1827

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.24 (Cont)	Elongation (Cont)	
	Thickness	
	Minimum overall (inches)	1829
	Minimum overall (millimetres)	1830
	Minimum thinnest portion (inch)	1831
	Minimum thinnest portion (millimetres)	1832
	Belting cover (pulley side)	
	Minimum thickness (inches)	1833
	Minimum thickness (millimetres)	1834
	Finished belt:	
	Minimum elongation at rated tension (percent of original)	1840
	Maximum elongation at rated tension (percent of original)	1841
5.25	Fatigue Resistance	
	(Select one test method)	
	Test per 1006 document.	1949
	Test per 1006 document except _____.	1950

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.25 (Cont)	Fatigue Resistance (Cont)	
	Test per MIL-B-11040.	1951
	Driver pulley speed (rpm)	1952
	Dynamometer load (horsepower)	1953
	Tension weight at no load (pounds)	1954
	Tension weight at no load (kilograms)	1955
	(Select one requirement)	
	Requirement(s) per 1006 document.	1958
	Requirement(s) per 1006 document except _____.	1959
	Requirement(s) as follows:	
	*Belt shall not break or fracture.	1960
	Maximum belt slippage (percent)	1961
5.26	Fungus	
	(Select one test method)	
	Test per 1006 document.	4753
	Test per 1006 document except _____.	4754

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currenversion before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.26 (Cont)	Fungus (Cont)	
	Test per MIL-STD-810 Method 508.	4755
	Test period (days) (if other than 28 days)	4756
	After test, the test item shall be operated and then visually inspected.	4757
	(Select one requirement)	
	Requirement(s) per 1006 document.	4759
	Requirement(s) per 1006 document except _____.	4760
	Requirement(s) as follows:	
	Fungus resistant by certification or test.	4761
	Fungus resistant by test.	4762
5.27	Piping (Leather Belting)	
	(Select one test method)	
	Test per 1006 document.	2040
	Test per 1006 document except _____.	2041
	Test per FED-STD-311 Method 4111.	2042
	Diameter of mandrel (inches)	2043
	Diameter of mandrel (millimetres)	2044

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.27 (Cont)	Piping (Leather Belting) (Cont)	
	(Select one requirement)	
	Requirement(s) per 1006 document.	2050
	Requirement(s) per 1006 document except _____.	2051
	Requirement(s) as follows:	
	Belting shall not pipe on either side.	2052
5.28	Straightness (Leather Belting)	
	(Select one test method)	
	Test per 1006 document.	2070
	Test per 1006 document except _____.	2071
	Test per KK-B-201.	2072
	Intervals of measurement (inches)	2073
	Intervals of measurement (feet)	2074
	Intervals of measurement (millimetres)	2075
	Intervals of measurement (metres)	2076
	(Select one requirement)	
	Requirement(s) per 1006 document.	2090

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.28 (Cont)	Straightness (Leather Belting) (Cont)	
	Requirement(s) per 1006 document except _____.	2091
	Requirement(s) as follows:	
	Maximum curvature (inches)	2092
	Maximum curvature (millimetres)	2093
5.29	Temperature Resistance	
	(Select one test method)	
	Test per 1006 document.	1918
	Test per 1006 document except _____.	1919
	Test per MIL-B-11040.	1920
	High temperature (degrees C)	1921
	± tolerance (degrees C)	1922
	Duration (hours)	1923
	Applied tensional force (pounds)	1924
	Applied tensional force (kilograms)	1925

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.29 (Cont)	Temperature Resistance (Cont)	
	Low temperature (degrees C)	1926
	± tolerance (degrees C)	1927
	Duration (hours)	1928
	(Select one requirement)	
	Requirement(s) per 1006 document.	1933
	Requirement(s) per 1006 document except _____.	1934
	Requirement(s) as follows:	
	*Belts shall not crack.	1935
	Torque required to start rotation	
	Maximum (pound-feet)	1936
	Maximum (kilogram-metre)	1937
	Torque required to continue rotation	
	Maximum (pound-feet)	1938
	Maximum (kilogram-metre)	1939

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.30	Tensile Strength	
	(Select one test method)	
	Test per 1006 document.	1768
	Test per 1006 document except _____.	1769
	Test as follows:	
	For nonleather belting (Test per FED-STD-601 Method 4111)	1770
	*Test specimen (type)	
	Dumbbell.	1771
	*Die (number)	1772
	Ring.	1773
	Straight.	1774
	For leather belting (Test per FED-STD-311 Method 2021)	1775
	(Select one requirement)	
	Requirement(s) per 1006 document.	1778
	Requirement(s) per 1006 document except _____.	1779

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.30 (Cont)	Tensile Strength (Cont)	
	Requirement(s) as follows:	
	Belting (without cover)	
	Warp, minimum	
	(pounds per ply inch)	1780
	(kilograms per ply millimetre)	1781
	Fill, minimum	
	(pounds per ply inch)	1782
	(kilograms per ply millimetre)	1783
	Belting cover (carrying side)	
	Minimum (psi)	1787
	Minimum (pascal)	1788
	Finished belt	
	Minimum (pounds per ply inch)	1791
	Minimum (kilograms per ply millimetre)	1792
	Minimum (psi)	1795
	Minimum (pascal)	1796

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 6

USE OF AEDPS

6.1 Procedure

The step by step procedure contained in MIL-STD-35 is applicable to Belts, Transmission and Conveyor.

Custodians:
Army-MI

Review Activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User Activity:
Army-MU

Preparing Activity:
Army-MI
(Project EDS-A056)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 7

FIGURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS SPACE INTENTIONALLY
LEFT BLANK

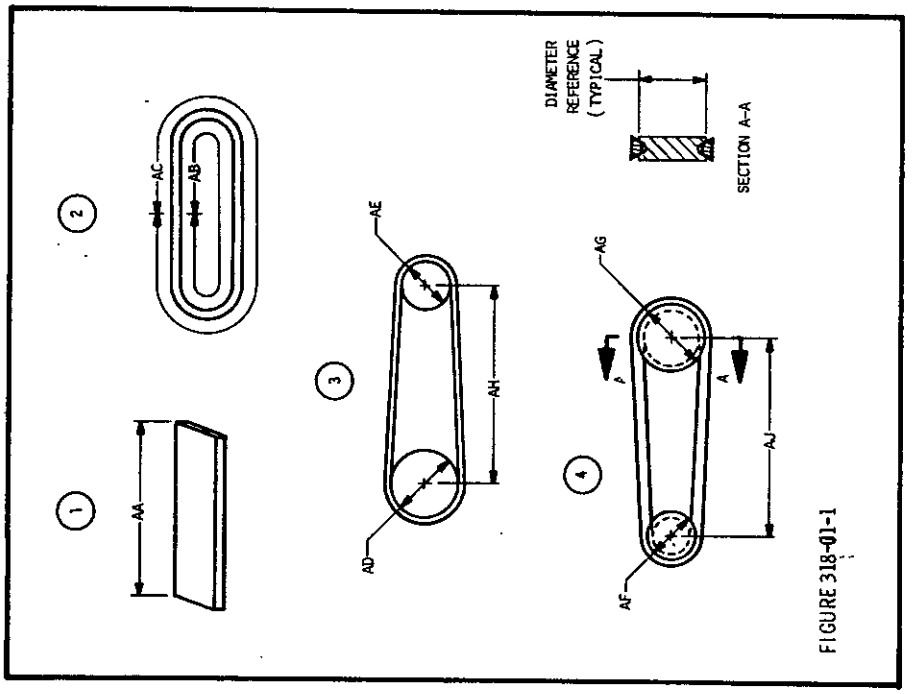


FIGURE 318-01-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

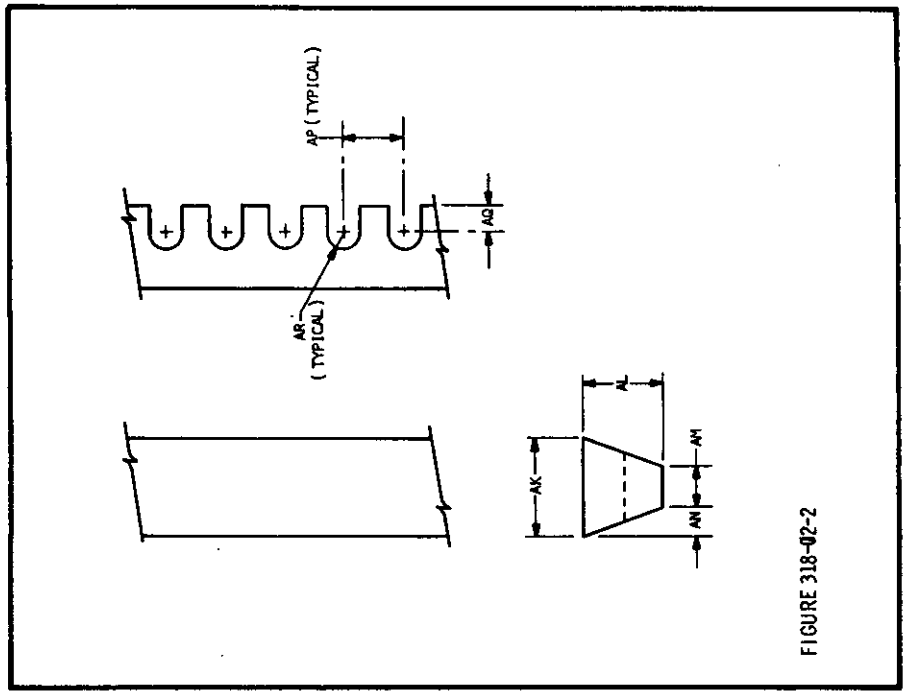


FIGURE 318-02-2

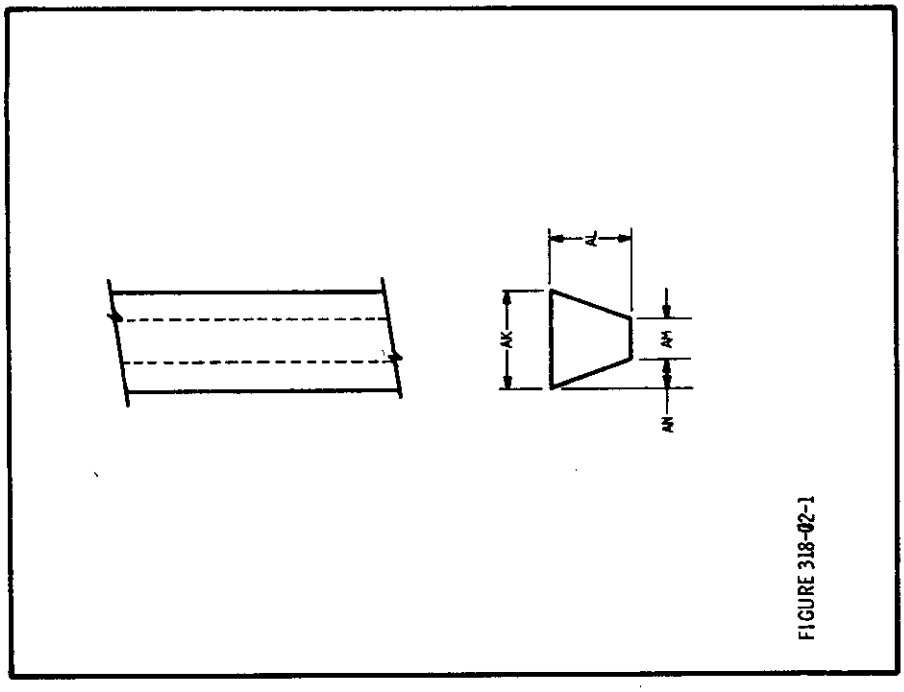


FIGURE 318-02-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

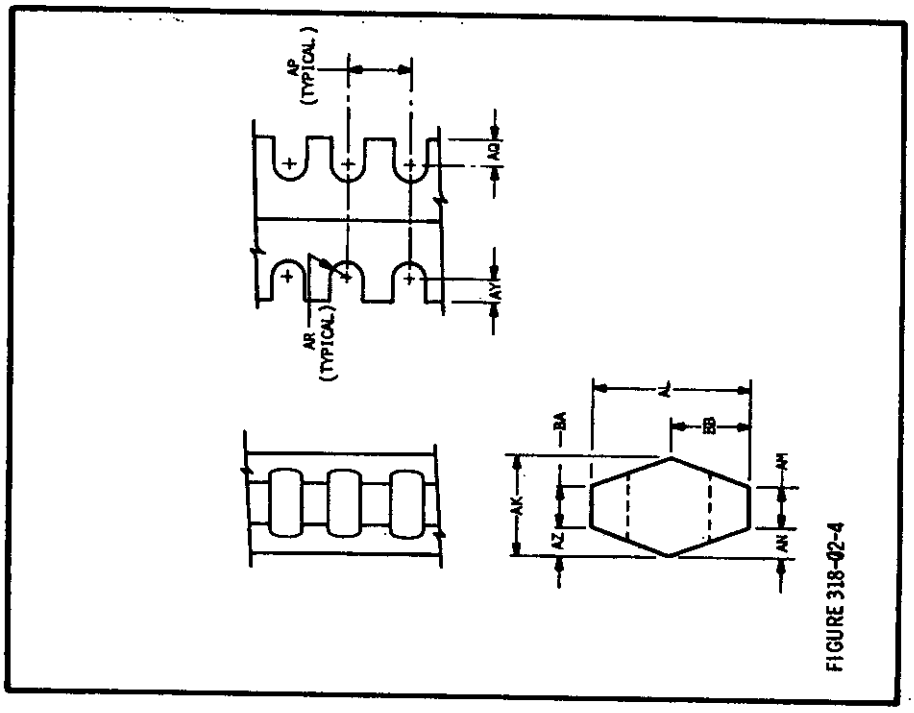


FIGURE 318-02-4

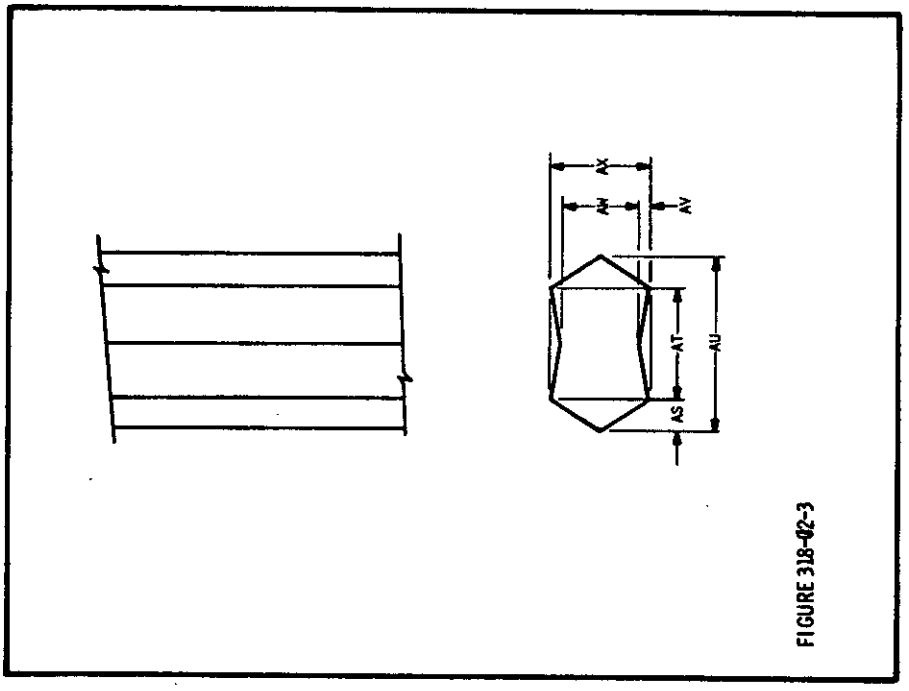


FIGURE 318-02-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

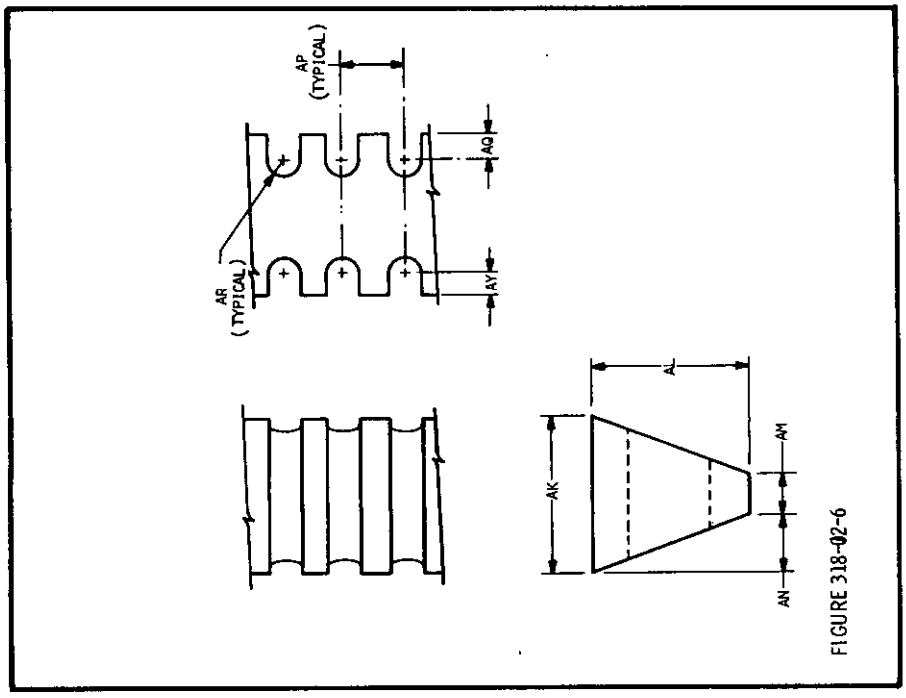


FIGURE 318-02-6

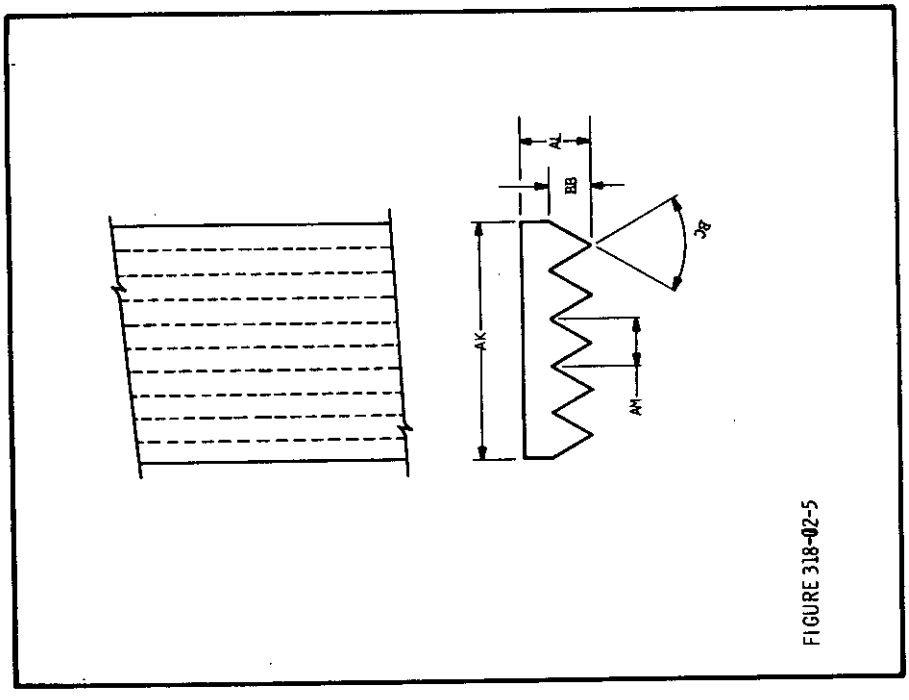


FIGURE 318-02-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

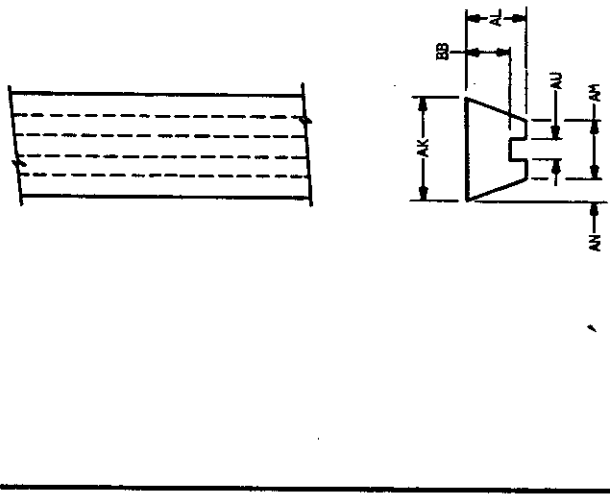


FIGURE 318-02-8

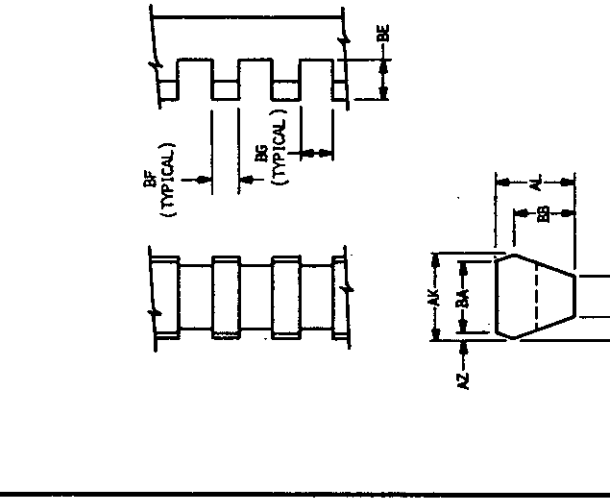


FIGURE 318-02-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

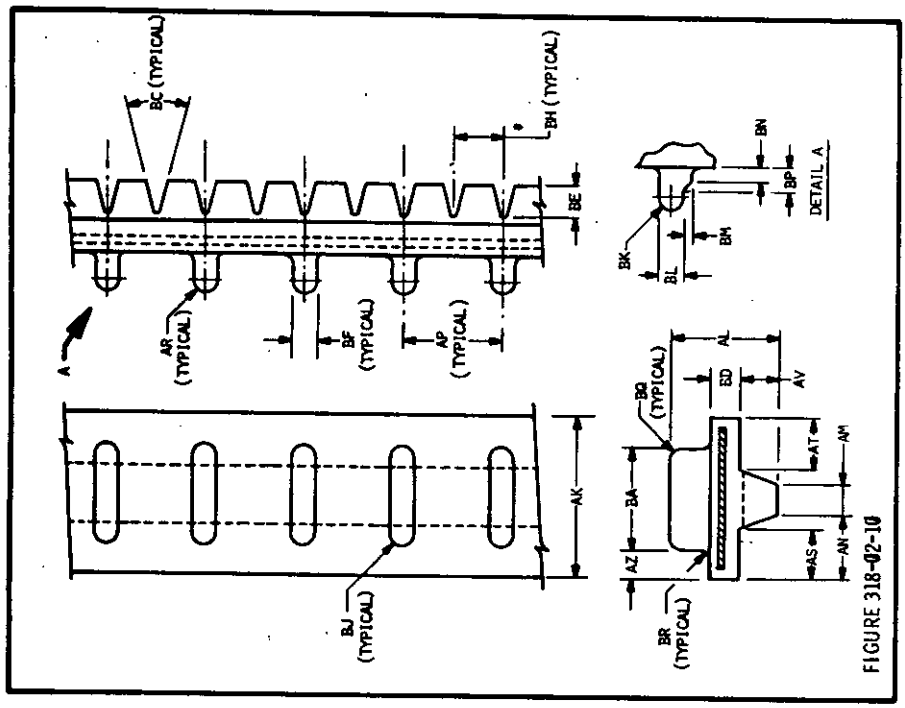


FIGURE 318-02-10

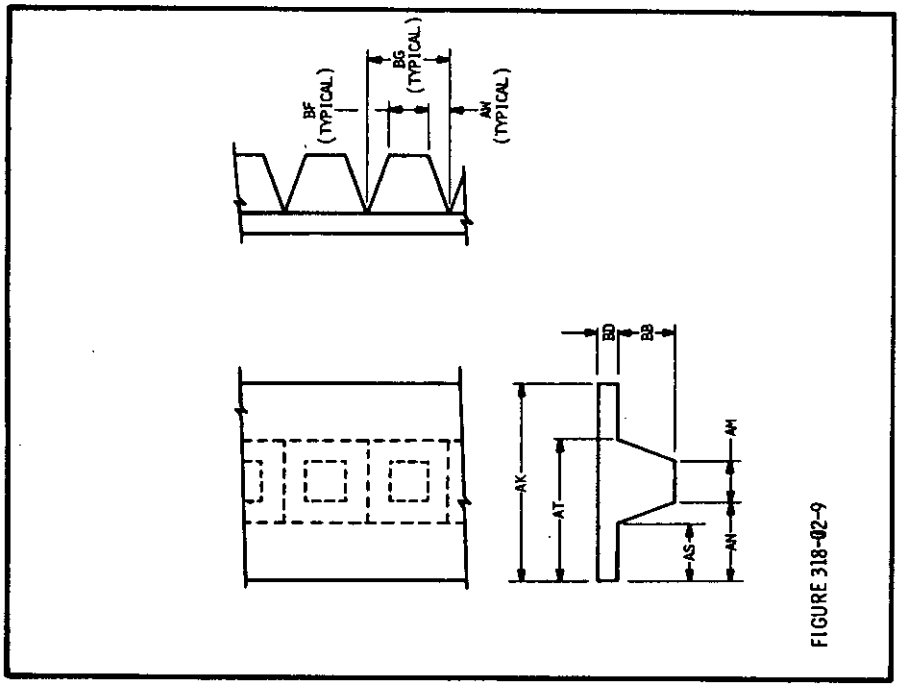


FIGURE 318-02-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

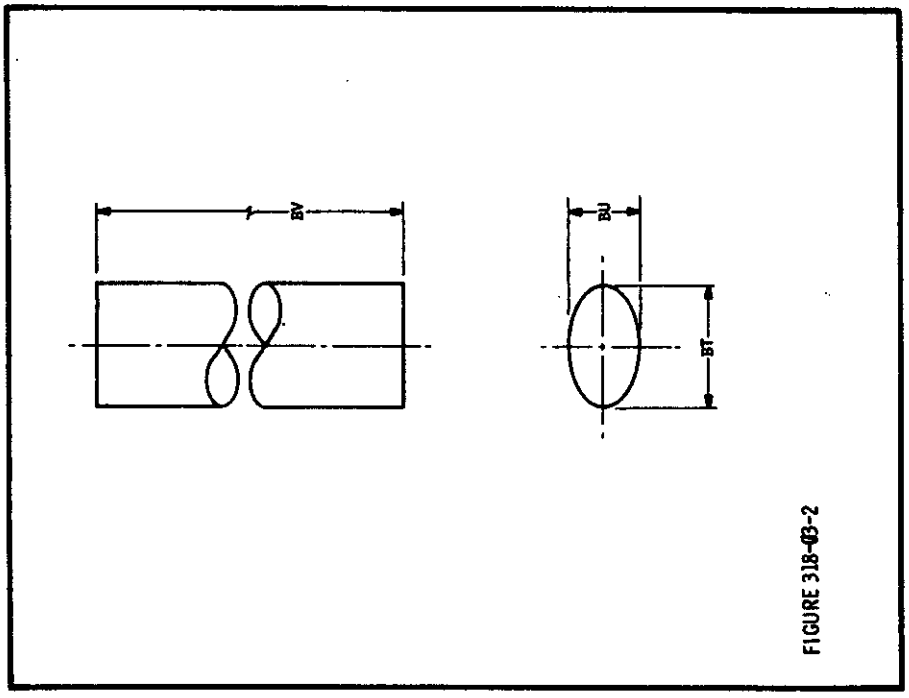


FIGURE 318-03-2

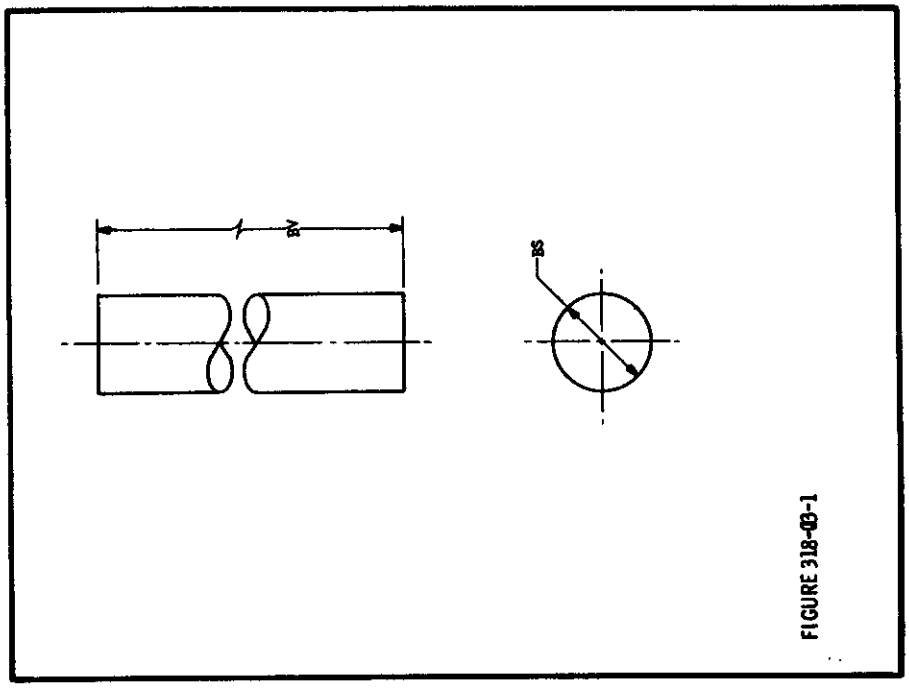


FIGURE 318-03-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

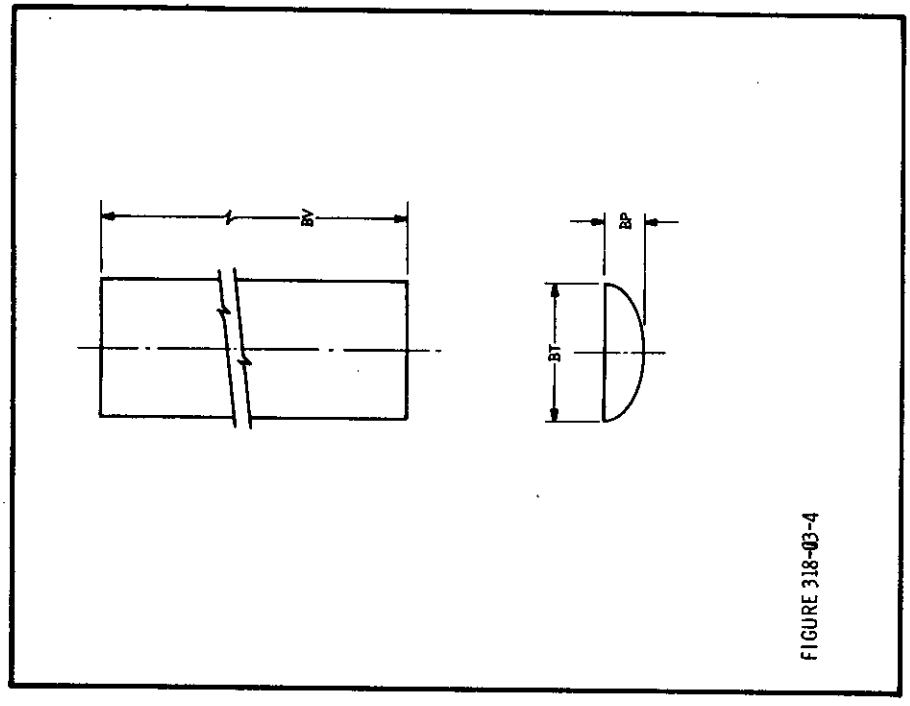


FIGURE 318-03-4

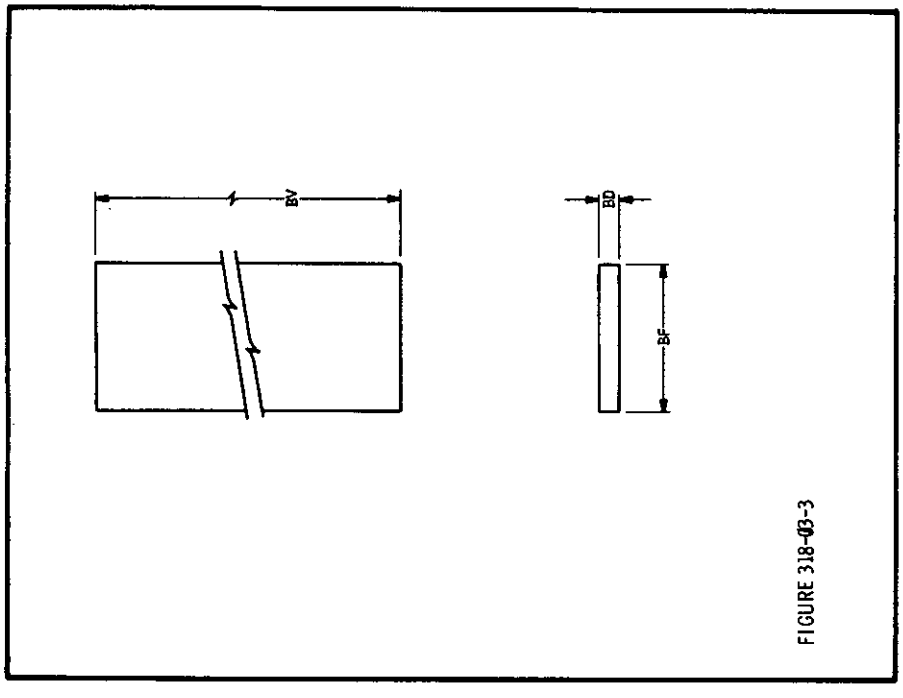


FIGURE 318-03-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

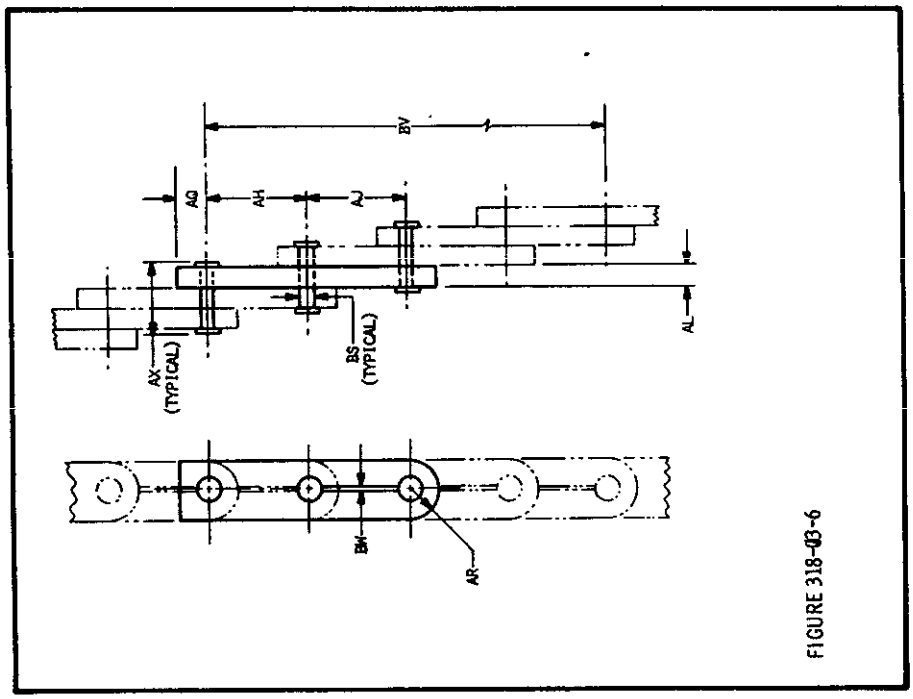


FIGURE 318-03-6

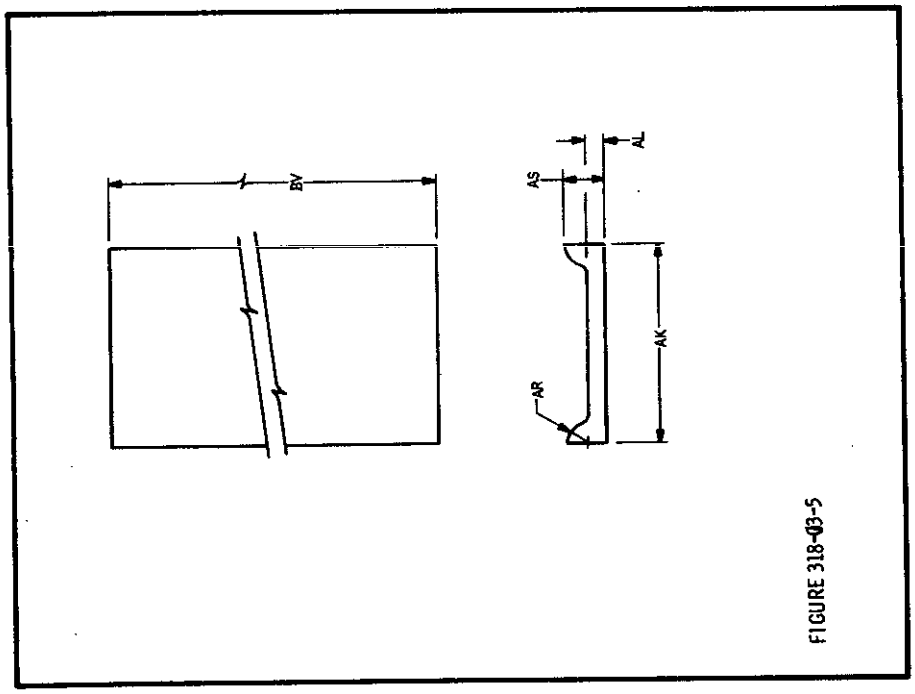


FIGURE 318-03-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 8

TABLES

Tables contained in MIL-STD-35 are applicable to Belts, Transmission and Conveyors.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. PHYSICAL AND CHEMICAL REQUIREMENTS AND TESTS FOR LEATHER BELTING

Requirement	Percentage		Test Document	Test Method
	Minimum	Maximum	Number	Number
Moisture	2200	2201	2202	2203
Chloroform Content	2204	2205	2206	2207
Water Soluble Material	2208	2209	2210	2211
Insoluble Ash	2212	2213	2214	2215
Total Ash	2216	2217	2218	2219
Nitrogen	2220	2221	2222	2223
Combined Tannin	2224	2225	2226	2227
Degree of Tannage	2228	2229	2230	2231
Acidity pH	2232	2233	2234	2235
Parantrophenol	2236	2237	2238	2239
Grease Content	2240	2241	2242	2243

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Missile Command
ATTN: AMSMI-RCS
Redstone Arsenal, AL 35809

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-STD-35-80(MI); AEDPS; Belts, Transmission and Conveyor

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.