MIL-STD-35-96 (MI)
16 FEBRUARY 1976

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

REGULATORS, CURRENT AND VOLTAGE, AC AND DC

FSC-EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL COMMAND
WASHINGTON, D.C. 20315

Automated Engineering
Document Preparation System,
Regulators, Current and Voltage, AC and DC

MIL-STD-35-96(MI)

1. This Military Standard is approved by the U.S. Army Materiel Command, Department of the Army, and is approved for use by all its activities. All other military activities are required to employ this Standard where suitable.

2. Recommended corrections, additions or deletions should be addressed to Commander, U.S. Army Missile Command, ATTN: DRSMI-RCS, Redstone Arsenal, Alabama 35809.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

MIL-STD-35-96(MI)

FOREWORD

1. The purpose of MIL-STD-35-96(MI) is to facilitate the preparation of Military Specification, Exceptions for AC and DC, Current and Voltage Regulators.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the basic MIL-STD-35.

3. It is important that the procedure described in the basic document (MIL-STD-35C) and subsequent revisions be followed explicitly in order for the computer to produce a document suitable for competitive procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of MIL-STD-35C. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS

SECTION	TITLE	INSTR PAGE
SECTION 1	INTRODUCTION	1-1
1.1	Scope	1-1
1.2	Purpose	1-1
1.3	Format	1-1
1.4	Title	1-2
1.4.1	Index	1-3
SECTION 2	APPLICABLE DOCUMENTS	2-1
SECTION 3	DEFINITIONS	3-1
SECTION 4	GENERAL DESCRIPTION OF AEDPS	4-1
SECTION 5	DETAILED DESCRIPTION OF AEDPS	5-1
5.1	Introduction	5-1
5.2	Specification Requirement Sheet (SRS)	5-1
5.3	Specification Requirements	5-1
5.3.1	Mandatory Specification Requirements	5-1
5.4	Code 1006 Requirements and Test Methods	5-2
5.5	Approved Item Name Code	5-3
5.6	Dimensions and Figures	5-4
5.7	Applicable Documents	5-4
5.8	Tabulation	5-6

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS (CONT)

SECTION	TITLE	INSTR PAGE	SRL PAGE
5.9	Design and Construction	5-7	5-67
5.9.1	Type Regulation	5-7	5-67
5.9.2	Construction	5-8	5-67
5.9.3	Classification	5-8	5-67
5.9.4	Maximum Weight	5-9	5-68
5.9.5	Input(s)	5-10	5-68
5.9.6	Output(s)	5-11	5-68
5.10	Output Voltage Adjustment	5-13	5-69
5.11	Control Voltage	5-13	5-69
5.12	Altitude Range	5-14	5-70
5.13	Design Reliability Rating	5-14	5-70
5.14	Temperature	5-15	5-71
5.15	Acceleration	5-15	5-71
5.16	Acoustical Noise	5-17	5-72
5.17	Altitude	5-17	5-73
5.18	Closing Voltage	5-19	5-75
5.19	Control Signal	5-19	5-75
5.20	Current Regulation	5-20	5-76

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS (CONT)

SECTION	TITLE	INSTR PAGE	SRL PAGE
5.21	Dielectric Withstanding Voltage at Reduced Barometric Pressure	5-21	5-78
5.22	Dielectric Withstanding Voltage at Sea Level	5-22	5-79
5.23	Efficiency	5-25	5-81
5.24	Electrical Shock	5-25	5-82
5.25	Emergency Power Source	5-27	5-84
5.26	Endurance	5-27	5-85
5.27	Explosion	5-28	5-86
5.28	Flammability	5-29	5-87
5.29	Frequency Regulation	5-30	5-88
5.30	Fungus	5-31	5-90
5.31	Humidity	5-32	6-91
5.32	Insulation Resistance	5-33	5-92
5.33	Leakage (Immersion)	5-34	5-94
5.34	Opening Current	5-35	5-95
5.35	Operating Position	5-36	5-96
5.36	Output Current	5-37	5-97
5.37	Output Impedance	5-38	5-98

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

TABLE OF CONTENTS (CONT)

SECTION	TITLE	INSTR PAGE	SRL PAGE
5.38	Output Voltage Adjust	5-40	5-100
5.39	Over Voltage Protection	5-41	5-101
5.40	Parallel Operation	5-42	5-102
5.41	Polarity	5-42	5-103
5.42	Radio Interference	5-44	5-105
5.43	Recovery Time	5-45	5-106
5.44	Reliability Screening (Burn-In, Aging, Conditioning, Stabilization, Load Life, Overload)	5-46	5-107
5.45	Ripple Voltage	5-48	5-109
5.46	Salt Fog	5-49	5-110
5.47	Sand and Dust (Dust)	5-50	5-111
5.48	Shock	5-51	5-112
5.49	Short-Circuit	5-52	5-114
5.50	Temperature - Altitude	5-53	5-115
5.51	Temperature - High	5-54	5-116
5.52	Temperature - Low	5-55	5-118
5.53	Temperature Rise	5-57	5-119
5.54	Temperature Shock	5-58	5-121

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS (CONT)

SECTION	TITLE	INSTR PAGE	SRL PAGE
5.55	Transient Input	5-59	5-122
5.56	Vibration Low Frequency	5-60	5-123
5.57	Vibration (High Frequency)	5-60	5-123
5.58	Vibration (Random)	5-61	5-125
5.59	Voltage Regulation, Line	5-63	5-127
5.60	Voltage Regulation, Load	5-64	5-128
5.61	Wave Form	5-65	5-130
SECTION 6	USE OF AEDPS	6-1	
6.1	Procedure	6-1	
SECTION 7	FIGURES	7-1	
SECTION 8	TABLES	8-1	

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT
PREPARATION SYSTEM (AEDPS)

REGULATORS, CURRENT AND VOLTAGE, AC AND DC

SECTION 1

INTRODUCTION

1.1 Scope

This dash-numbered part of the Automated Engineering Document Preparation System, MIL-STD-35, covers detailed requirements of AC and DC, Current and Voltage Regulators.

1.2 Purpose

The purpose of this dash-numbered part of MIL-STD-35 is to provide a requester necessary information to properly prepare a request for a Current and Voltage Regulator Military Specification, Exception (MSE). Provisions for specifying frequency regulators have also been included.

1.3 Format

The requester will find it impossible to complete an SRS using only this dash-numbered part of MIL-STD-35. Specification Requirements which are standard for all generic families have been included in the master document at the issuance of MIL-STD-35C. These specification requirements are not repeated in each dash-numbered part. The following list contains subjects from MIL-STD-35 which are pertinent to every dash-numbered part unless otherwise excepted.

General Description of AEDPS
Part Numbering
Specification Requirements Sheet
Writing Methodology
Mandatory Specification Requirements
General Specification Requirements

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Dimensions and Drawings
Applicable Documents
Materials
Finishes
Inspections
Single and Multi-item Specifications (Tabulation)
Sources
Search
General Instructions for SRL
Tables

1.4 Title

The title of a generated MSE must be selected from one of the titles listed in the Military Specification Exception Title Index (see 1.4). If a suitable title is not found in the Military Specification Exception Title Index, a request should be forwarded to USAMICOM, ATTN: AMSMI-RCS, along with the desired title, and the related document. A code will be assigned and the code, title, and related document will be made a part of the Military Specification Exception Title Index. The requester will be notified of the code assinged. When no document is listed in the RELATED DOCUMENT COLUMN, exception may be taken to the most appropriate document listed in the Military Specification Exception Title Index.

One of the six-digit characteristic value codes, listed in the MSE TITLE CODE column of the Military Specification Exception Title Index, entered on a Specification Requirements Sheet (SRS), will specify that the title of the MSE will be the title shown with that code in the index. Each MSE title listed in the index is compatible with the document(s) listed with that title in the RELATED DOCUMENT column. The list may or may not be a complete listing.

The information contained in the RELATED DOCUMENT COVERAGE column is intended for the requester's reference; when more than one document is listed for a title, this information will be found useful in determining which of the documents is most suitable for use as the applicable General Specification.

The MSE title uses the basic federal item name listed in Cataloging Handbook H6. Titles with additional modifying and identifying words are provided to assist a designer in defining the scope of the MSE. To allow

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

the designer flexibility, the title is generally not as restrictive as the basic specification to which the exception is taken. The reverse AEDPS Title comprises the words that will appear in the Scope paragraph (1.1) of the MSE.

If the item selected from the AEDPS document becomes an item of supply, then the Cataloging Handbook H6 nomenclature must be used.

The MSE title may or may not be the same as the title used in DODISS, FIIG or the document to which the MSE document was written. Documents referenced in the MSE that will be listed in the Applicable Documents' paragraph (2.1) of the MSE will be identified by the exact title that appears on the referenced document. The title written on the MSE or in DODISS or FIIG will not be entered in paragraph 2.1.

1.4.1 Index

The Military Specification Exception Title Index is as follows:

RELATED DOCUMENT	RELATED DOCUMENT COVERAGE	MSE TITLE	MSE TITLE CODE
	Regulator Assembly, Voltage - INC 07297		
MIL-R-48442	DC	Regulator Assembly, Voltage	32ØØØ1
MIL-R-50657	DC		
MIL-R-50658	DC		
MIL-R-50659	DC		
MIL-R-50660	DC		
MIL-R-50661	DC		
MIL-R-50662	DC		
MIL-R-50663	DC		
MIL-R-50664	DC		
MIL-V-60216	DC		
MIL-V-60217	DC		
MIL-V-60218	DC		
MIL-V-60219	DC		
MIL-V-82568	DC		

Source: https://assist.dla.mil -- Downloaded: 2026Ø1-26T07:24Z
Check the source to verify that this is the current version before use.

RELATED DOCUMENT	RELATED DOCUMENT COVERAGE	MSE TITLE	MSE TITLE CODE
		Regulator, Audio Level - INC 11462	
(See 1.4)		Regulator, Audio Level	320002
		Regulator, Current - INC 00715	
MIL-R-4707	AC	Regulator, Current	320003
MIL-R-6365	AC		
MIL-R-6402	AC		
		Regulator, Engine Generator - INC 17169	
AN3206	DC	Regulator, Engine Generator	320004
MIL-R-6339	AC		
MIL-R-6809	DC		
MIL-R-10265	DC		
MS13803	DC		
MS13805	DC		
MS18071	DC		
MIL-R-23761	DC		
MIL-R-25077	AC		
MS35877	DC		
MS51005	DC		
MS51311	DC		
MIL-R-62067	DC		
MIL-R-62104	DC		
MS90492	DC		
		Regulator, Frequency - INC 16231	
MIL-R-23098	400 Hz	Regulator, Frequency	320005
		Regulator Set, Voltage - INC 02666	
MIL-R-2729	AC	Regulator Set, Voltage	320006

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

RELATED DOCUMENT	RELATED DOCUMENT COVERAGE	MSE TITLE	MSE TITLE CODE
	Regulator, Voltage - INC 00176		
MIL-R-2729	AC	Regulator, Voltage	320007
AN3206	DC		
MIL-R-6339	AC		
MIL-R-6809	DC		
MIL-R-10265	DC		
MIL-V-10537	AC		
MIL-R-14368	AC		
MS18071	DC		
MIL-R-23098	AC		
MIL-R-25077	AC		
MS35877	DC step type		
MIL-R-45600	DC		
MIL-R-45667	DC		
MIL-R-45762	DC		
MIL-R-50318	DC		
MIL-R-50319	DC		
MIL-R-50325	DC		
MIL-R-50326	DC		
MIL-R-50327	DC		
MIL-R-50328	DC		
MIL-R-55223	AC		
MIL-V-60216	DC		
MIL-V-60217	DC		
MIL-V-60218	DC		
MIL-V-60219	DC		
MIL-R-60239	DC		
MIL-R-82515	DC		
MIL-V-82568	DC		
	Regulator, Voltage and Frequency - INC 16232		
MIL-R-23098	400 Hz	Regulator, Voltage and Frequency	320008

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 2

APPLICABLE DOCUMENTS

The following documents form a part of this Standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-I-6181	Interference Control Requirements, Aircraft Equipment
MIL-R-10265	Regulator, Engine Generator; 28-Volt Direct Current, Vibrating Type
MIL-R-55223	Regulator, Voltage CN-514 ( )/GRC
MIL-R-82515	Regulator, Voltage

STANDARDS

MILITARY

MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-704	Electric Power, Aircraft, Characteristics and Utilization of
MIL-STD-810	Environmental Test Methods

OTHER PUBLICATIONS

ASTM E380	Metric Practice Guide

(Copies of Standards and Handbooks required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 3

DEFINITIONS

Definitions contained in MIL-STD-35 are applicable to AC and DC, Current and Voltage Regulators.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 4

GENERAL DESCRIPTION OF AEDPS

The general description of AEDPS contained in MIL-STD-35 is applicable to AC and DC, Current and Voltage Regulators.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 5

DETAILED DESCRIPTION OF AEDPS

5.1 Introduction

The detailed description of AEDPS applicable to AC and DC, Current and Voltage Regulators consists of the following:

a. The detailed description of AEDPS specified in MIL-STD-35.

b. The additional detailed description contained in this section.

5.2 Specification Requirement Sheet (SRS)

Specification Requirement Sheet (SRS) requirements described in MIL-STD-35 and at the end of this dash-numbered part are applicable to AC and DC, Current and Voltage Regulators.

5.3 Specification Requirements

All specification requirements described in MIL-STD-35 are applicable to AC and DC current and Voltage Regulators.

Refer to ASTM E380 for guidance in using the International System of Units (SI).

5.3.1 Mandatory Specification Requirements

In addition to the mandatory specification requirements of MIL-STD-35, some of the specification requirements described herein are mandatory and shall be entered on the SRS of each request for an MSE. If one or more of these mandatory characteristics are omitted from a request, one or more important details will not be included in the MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Mandatory specification requirements consist of all those listed in MIL-STD-35 and the following:

CHARACTERISTICS	CHARACTERISTIC CODE
Type Regulation (Select one)	
Continuous	1563
Step	1564
Construction (Select one or more)	
Open	1566
Enclosed	1567
Enclosed, Ventilated	1568
Hermetically Sealed	1569
Encapsulated	1570
Printed Circuit Board	1571

5.4 Code 1006 Requirements and Test Methods

Many requirements and test methods are shown on the SRL as "Requirements per 1006 document" or "Test per 1006 document" with an adjacent code for each. The adjacent code, entered on the SRS with an "X", will cause the MSE to state that the requirement or test method be in accordance with the document to which exception is being taken.

Similarly, many requirements and test methods are shown on the SRL as "Requirements per 1006 document except" or "Test per 1006 document except" with an adjacent code for each. This adjacent code, entered on the SRS with the exact words desired to complete the statement shown, will specify a complete statement. Only the words required to complete the statement after the "except" are entered on the SRS (Example 1).

CHAR CODE 13 14 15 16	CHARACTERISTIC VALUE 20 25 30 35 40 45 50 55 60
5402	THERMAL SHOCK SHALL BE 175 DEG C HIGH TEMP#

EXAMPLE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

In Example 1, the code and entry will generate a paragraph as follows:

"GROUP A INSPECTION. GROUP A INSPECTION SHALL BE PERFORMED AS SPECIFIED IN THE SPECIFICATION REFERENCED IN 3.1 EXCEPT THERMAL SHOCK SHALL BE 175 DEG C HIGH TEMP."

The test method per 1006 code and requirements per 1006 code from the same test shall not be used together. This condition would indicate no exception is being specified. If a test method code(s) has been selected, it is mandatory that a requirement code be selected; and if a requirement code has been selected, it is mandatory that a test method code(s) be selected.

5.5 Approved Item Name Code

The approved item name code to be entered on the SRS with Code 1007 for a regulator is selected from the following list:

APPROVED ITEM NAME	ITEM NAME CODE
Regulator, Assembly, Voltage	07297
Regulator, Audio Level	11462
Regulator, Current	00715
Regulator, Engine Generator	17169
Regulator, Frequency	16231
Regulator, Set, Voltage	02666
Regulator, Voltage	00176
Regulator, Voltage and Frequency	16232
Unapproved Name	77777

Only the ITEM NAME CODE number is entered on the SRS with Code 1007.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

5.6 Dimensions and Figures

All specification requirements for dimensions and figures described in MIL-STD-35 are applicable.

The figures applicable to Current and Voltage Regulators are contained in Section 7. It is mandatory to enter on the SRS Code 1009 and a figure number.

5.7 Applicable Documents

The documents listed in the Applicable Document List of Section 5 of MIL-STD-35 and appropriate codes from Table B of MIL-STD-35 shall be entered on the SRS. In addition, the appropriate documents shown in the DOCUMENTS column below and the applicable codes from Table B of MIL-STD-35 shall be entered on the SRS when the codes listed in the CODES column are used to specify tests or requirements. Shown parenthetically in the CODES column is a reference to the applicable test or requirement. A document designation, with a code from Table B, is entered on the SRS only once.

DOCUMENTS	CODES
MIL-R-10265	1645 (Closing Voltage) 1877 (Opening Current)
MIL-R-55223	2242 (Voltage Regulation, Line) 2262 (Voltage Regulation, Load)
MIL-R-82515	1672 (Control Signal)
MIL-STD-202	1378 (Insulation Resistance) 1427 (Vibration, Random) 1447 (Vibration, High Frequency) 1467 (Vibration) 1802 (Flammability) 4862 (DWV-Sea Level) 6300 (DWV-Reduced Barometric Pressure) 6697 (Reliability)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DOCUMENTS (CONT)	CODES (CONT)
MIL-STD-461	2037 (Radio Interference)
MIL-STD-462	2007 (Radio Interference)
MIL-STD-704	2059 (Recovery Time) 2083 (Ripple Voltage)
MIL-STD-810	1603 (Acoustical Noise) 1621 (Altitude) 1782 (Explosion) 2117 (Temperature-Altitude) 2132 (Temperature-High) 2157 (Temperature-Low) 4710 (Thermal Shock) 4755 (Fungus) 4780 (Salt Fog) 4871 (Humidity) 4953 (Sand and Dust) 6252 (Acceleration) 7303 (Leadkage, Immersion) 7312 (Shock)
Document to which exception is taken	1006

In addition, when the codes listed below are used to specify mounting or special preparations in accordance with a document, the document number with an appropriate code from Table B of MIL-STD-35 must be entered on the SRS.

1805 Flammability, direction
1807 Flammability, point of impingement
1892 Operating position, testing
4707 Vibration, high frequency, mounting
4773 Salt fog, mounting
4859 Dielectric withstanding voltage - reduced barometric pressure preparation

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

4975 Vibration, random, mounting
5000 Dielectric withstanding voltage - sea level, mounting
6280 Dielectric withstanding voltage - reduced barometric pressure, mounting
6924 Reliability, mounting

For these codes any document from the Index, 1.4.2, may be used to specify which test in the document contains applicable mounting or preparation requirements, enter on the SRS the test name and the document number (Example 2).

CHAR CODE 13 14 15 16	CHARACTERISTIC VALUE 20 25 30 35 40 45
1892	MIL-R-55223, ORIENTATION#

EXAMPLE 2

Code 1892 in Example 2 specifies that the testing in the operating position test, which is not in MIL-R-55223, shall be in accordance with the testing in the orientation test.

5.8 Tabulation

All specification requirements for tabulation described in MIL-STD-35 are applicable.

In addition to dimensions from Table A, characteristics in this dash-numbered part that are candidates for tabulation are contained in the following list. Table headings are shown as they will be printed in the MSE. Only characteristic codes from Table A and this list shall be entered on the SRS with codes from the Specification Requirement Sheet Tabulation Table of MIL-STD-35.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

When different units of measure are shown for a specified parameter, only one may be tabulated. For example, where there are several codes which may be used to specify weight, each of which specifies a different unit of measure, only one code may be tabulated. However, equivalent U.S. or SI units of measure may be used for a specified parameter.

TABULATION CANDIDATES FOR CURRENT AND VOLTAGE REGULATORS

TOP LINE	SECOND LINE	BOTTOM LINE	CODE
Maximum	Weight	(ounces)	2300
Maximum	Weight	(pounds)	2301
Maximum	Weight	(grams)	2302
Maximum	Weight	(kg)	2303
Input One	Voltage	(volts dc)	4212
Input One	Voltage	(volts ac)	4218
Input One	Current	(amperes)	4230
Input One	Frequency	(hertz)	4242
Input One	Phase	(number)	4254
Output One	Voltage	(volts dc)	3908
Output One	Voltage	(volts ac)	3912
Output One	Min Volt	reg (pct)	3920
Output One	Min Freq	reg (pct)	3932
Output One	Minimum	Current A	3936
Output One	Maximum	Current A	3940
Output One	Min Cur	reg (pct)	3948
Output One	Phase	(number)	3952
Output One	Power	(watts)	3956
Output One	(kVA)		3960

5.9 Design and Construction

5.9.1 Type Regulation

One of the type regulation codes is mandatory, the codes and information concerning them is as follows:

Code 1563 and an "X", entered on the SRS, will specify the type of regulation shall be continuous. Do not use Code 1564 with Code 1563.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1564 and an "X", entered on the SRS, will specify the type of regulation shall be step. Do not use Code 1563 with Code 1564.

5.9.2 Construction

One of the construction codes is mandatory, others are optional. The codes and information concerning them is as follows:

Code 1566 and an "X", entered on the SRS, will specify the construction shall be open.

Code 1567 and an "X", entered on the SRS, will specify the construction shall be enclosed.

Code 1568 and an "X", entered on the SRS, will specify the construction shall be enclosed, ventilated.

Code 1569 and an "X", entered on the SRS, will specify the construction shall be hermetically sealed.

Code 1570 and an "X", entered on the SRS, will specify the construction shall be encapsulated.

Code 1571 and an "X", entered on the SRS, will specify the construction shall be printed circuit board.

5.9.3 Classification

Only one of the classification codes may be used. The codes and information concerning them is as follows:

Code 1572 and an "X", entered on the SRS, will specify the classification shall be Grade A. Do not use Code 1573, 1574, 1575, 1576, 1577, 1578, or 1579 with Code 1572.

Code 1573 and an "X", entered on the SRS, will specify the classification shall be Grade B. Do not use Code 1572, 1574, 1575, 1576, 1577, 1578, or 1579 with Code 1573.

Code 1574 and an "X", entered on the SRS, will specify the classification shall be Type I. Do not use Code 1572, 1573, 1575, 1576, 1577, 1578, or 1579 with Code 1574.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1575 and an "X", entered on the SRS, will specify the classification shall be Type II. Do not use Code 1572, 1573, 1574, 1576, 1577, 1578, or 1579 with Code 1575.

Code 1576 and an "X", entered on the SRS, will specify the classification shall be Type III. Do not use Code 1572, 1573, 1574, 1575, 1577, 1578, or 1579 with Code 1576.

Code 1577 and an "X", entered on the SRS, will specify the classification shall be Unit 1. Do not use Code 1572, 1573, 1574, 1575, 1576, 1578, or 1579 with Code 1577.

Code 1578 and an "X", entered on the SRS, will specify the classification shall be Unit 2. Do not use Code 1572, 1573, 1574, 1575, 1576, 1577, or 1579 with Code 1578.

Code 1579 and an "X", entered on the SRS, will specify the classification shall be Unit 3. Do not use Code 1572, 1573, 1574, 1575, 1576, 1577, or 1578 with Code 1579.

5.9.4 Maximum Weight

Code 2300 and a value, entered on the SRS, will specify the maximum weight in ounces. If Code 2302 or 2303 is used with Code 2300, equivalent values must be used. Do not use Code 2301 with Code 2300.

Code 2301 and a value, entered on the SRS, will specify the maximum weight in pounds. If Code 2302 or 2303 is used with Code 2301, equivalent values must be used. Do not use Code 2300 with Code 2301.

Code 2302 and a value, entered on the SRS, will specify the maximum weight in grams. If Code 2300 or 2301 is used with Code 2302, equivalent values must be used. Do not use Code 2303 with Code 2302.

Code 2303 and a value, entered on the SRS, will specify the maximum weight in kilograms. If Code 2300 or 2301 is used with Code 2303, equivalent values must be used. Do not use Code 2302 with Code 2303.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

5.9.5 Input(s)

Table I permits the user to specify from one to six inputs.

Codes 4200 through 4205 and values, entered on the SRS, will specify the common name for the six inputs, columns one through six (Example 3).

Codes 4206 through 4211 and values, entered on the SRS, will specify the terminal designations of the inputs named with Codes 4200 through 4205 (Example 3). In the event Codes 4200 through 4205 are not used, the following lines, Codes 4212 through 4259, shall be applicable to the terminal designations and numbered inputs.

CHARACTERISTIC NAME	CHAR CODE 13 14 15 16	CHARACTERISTIC VALUE 20 25 30 35
	4200	INPUT VOLTS#
	4201	CNTRL VOLTS#
	4202	PRGRM INPUT#
	4206	A1-A2#
	4207	C1-C2#
	4208	P1-P2#

EXAMPLE 3

In Example 3, Code 4200 specifies the name of input one shall be Input Volts; Code 4201 specifies the name of input two shall be Control Volts; Code 4202 specifies the name of input three shall be Program Input; Code 4206 specifies the input one terminal designations shall be A1-A2; Code 4207 specifies the input two terminal designations shall be C1-C2; Code 4208 specifies the input three terminal designations shall be P1-P2.

Codes 4212 through 4217 and values, entered on the SRS, will specify the volts dc for the six inputs (Example 4). Codes 4218 through 4223 should be used with caution. When an input is specified as being volts dc, do not specify a volts ac value for the same input.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Codes 4218 through 4223 and values, entered on the SRS, will specify the volts ac for the six inputs (Example 4). Codes 4212 through 4217 should be used with caution. When an input is specified as being volts ac, do not specify a volts dc value for the same input.

Codes 4224 through 4229 and values, entered on the SRS, will specify the plus or minus voltage tolerance in volts (Example 4).

The remaining codes in Table I are used in a similar manner.

CHARACTERISTIC NAME	CHAR CODE 13 14 15 16	CHARACTERISTIC VALUE 20 25 30 35
	4212	6.5#
	4213	5.0#
	4220	10.0#
	4224	2.0#
	4225	1.75#
	4226	0.25#

EXAMPLE 4

In Example 4, Code 4212 specifies input one is 6.5 volts dc; Code 4213 specifies the input two, control voltage, is 5.0 volts dc; Code 4220 specifies input three, program input, is 10.0 volts ac; Code 4224 specifies the input one voltage tolerance is plus or minus 2.0 volts; Code 4225 specifies the input two, control voltage, tolerance is plus or minus 1.75 volts; Code 4226 specifies the input three, program voltage, tolerance is plus or minus 0.25 volts.

5.9.6 Output(s)

Table II permits the user to specify from one to four outputs.

Codes 3900 through 3903 and values, entered on the SRS, will specify the common name for the four outputs, columns one through four (Example 5).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

Codes 3904 through 3907 and values, entered on the SRS, will specify the terminal designations of the outputs named with Codes 3900 through 3903 (Example 5). In the event Codes 3900 through 3903 are not used, the following lines, Codes 3908 through 3963 shall be applicable to the terminal designations and numbered outputs.

Codes 3908 through 3911 and values, entered on the SRS, will specify the volts dc for the four outputs (Example 5). Codes 3912 through 3915 should be used with caution. When an output is specified as being volts dc, do not specify a volts ac value for the same output.

Codes 3912 through 3915 and values, entered on the SRS, will specify the volts ac for the four outputs (Example 5). Codes 3908 through 3911 should be used with caution. When an output is specified as being volts ac, do not specify a volts dc value for the same output.

Codes 3916 through 3919 and values, entered on the SRS, will specify the plus or minus voltage tolerance in volts (Example 5).

The remaining codes in Table 2 are used in a similar manner.

CHARACTERISTIC NAME	CHAR CODE 13 14 15 16	CHARACTERISTIC VALUE 20 25 30 35
	3900	REG V#
	3901	REG V#
	3904	B1-B2#
	3905	C4-C6#
	3908	65#
	3913	240#
	3916	1.25#
	3917	3.75#

EXAMPLE 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

In Example 5, Codes 3900 and 3901 specify the name of output one and two shall be the regulated voltage; Code 3904 specifies the output one terminals shall be B1-B2; Code 3905 specifies the output two terminals shall be C4-C6; Code 3908 specifies the output one voltage to be 65 volts dc, Code 3913 specifies the output two voltage to be 240 volts ac; Code 3916 specifies the output one voltage tolerance is plus or minus 1.25 volts; Code 3917 specifies the output two voltage tolerance is plus or minus 3.75 volts.

5.10 Output Voltage Adjustment

None of the output voltage adjustment codes are mandatory. The codes and information concerning them is as follows:

Code 1581 and an "X", entered on the SRS, will specify the output voltage adjustment shall be remote.

Code 1582 and an "X", entered on the SRS, will specify the output voltage adjustment shall be programmable.

Code 1583 and a value, entered on the SRS, will specify the output voltage adjustment shall be not less than the value specified in volts.

Code 1584 and a value, entered on the SRS, will specify the output voltage adjustment shall be not greater than the value specified in volts.

Code 1585 and a value, entered on the SRS, will specify voltage increments, in volts, for the output voltage adjustment. Code 1585 is used when the output voltage adjustment is a step function.

5.11 Control Voltage

The Control Voltage codes are optional. Information concerning them is as follows:

Code 1587 and a value, entered on the SRS, will specify the minimum temperature, in degrees Celsius, for the control voltage(s) specified.

Code 1588 and a value, entered on the SRS, will specify the minimum control voltage, in volts, at the temperature specified with Code 1587.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1589 and a value, entered on the SRS, will specify the maximum control voltage, in volts, at the temperature specified with Code 1587.

Code 1590 and a value, entered on the SRS, will specify the maximum temperature, in degrees Celsius, for the control voltage(s) specified.

Code 1591 and a value, entered on the SRS, will specify the minimum control voltage, in volts, at the temperature specified with Code 1590.

Code 1592 and a value, entered on the SRS, will specify the maximum control voltage, in volts, at the temperature specified with Code 1590.

5.12 Altitude Range

There are four codes which may be used to specify operating and non-operating altitude range in feet or metres. Information concerning them is as follows:

Code 5060 and a value, entered on the SRS, will specify the operating altitude range from sea level to the value specified in feet. When Code 5061 is used with Code 5060, equivalent values must be used.

Code 5061 and a value, entered on the SRS, will specify the operating altitude range from sea level to the value specified in metres. When Code 5060 is used with Code 5061, equivalent values must be used.

Code 5062 and a value, entered on the SRS, will specify the non-operating altitude range from sea level to the value specified in feet. When Code 5063 is used with Code 5062, equivalent values must be used.

Code 5063 and a value, entered on the SRS, will specify the non-operating altitude range from sea level to the value specified in metres. When Code 5062 is used with Code 5063, equivalent values must be used.

5.13 Design Reliability Rating

The Automated Engineering Document Preparation System (MIL-STD-35) is for use in generating procurement documents (Military Specification Exception, MSE) containing modified characteristics of an existing military document. The accumulation of several million unit-hours of testing necessary for verifying failure rate is usually not available, nor is it cost effective to require the verification testing. Therefore, MIL-STD-35 does not provide for specifying compliance to a failure rate level. Provision has been made for requiring that parts be designed and manufactured using designs, materials and manufacturing processes that have demonstrated compliance with a specified failure rate.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

There are five codes applicable to design reliability rating. Four of the codes (7025, 7026, 7029, and either 7028 or 7030) are mandatory to specify this rating. Information concerning them is as follows:

Code 7025 and a value, entered on the SRS, will specify the failure rate in percent per 1000 hours for which the part is to be designed at the confidence level and conditions specified. Code 7026 and a value must be entered on the SRS when Code 7025 is entered.

Code 7026 and a value, entered on the SRS, will specify the confidence level percent.

Code 7030 and a value, entered on the SRS, will specify the percent of rated voltage applicable to the design reliability rating. Code 7030 shall be not entered on the SRS when Code 7028 is entered.

Code 7028 and a value, entered on the SRS, will specify the percent of rated wattage, (not exceeding the rated voltage) applicable to the design reliability rating. Code 7028 shall be not entered when Code 7030 is entered.

Code 7029 and a value, entered on the SRS, will specify the chamber temperature in degrees Celsius applicable to the design reliability rating.

5.14 Temperature

There are two codes applicable to the operating temperature and two codes applicable to the nonoperating temperature. Information concerning them is as follows:

Code 5068 and a value, entered on the SRS, will specify the minimum operating temperature in degrees Celsius.

Code 5069 and a value, entered on the SRS, will specify the maximum operating temperature in degrees Celsius.

Code 5070 and a value, entered on the SRS, will specify the minimum nonoperating temperature in degrees Celsius.

Code 5071 and a value, entered on the SRS, will specify the maximum nonoperating temperature in degrees Celsius.

5.15 Acceleration

Code 6249 is the 1006 test code (5.4).

Code 6250 is the 1006 except test code (5.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

To detail an acceleration test, it is mandatory to use Codes 6252, 6275, and to specify a vehicle category with Code 6240, 6241, 6242, 6243, or 6244. Other codes are optional.

Code 6252 and an "X", entered on the SRS, will specify to test in accordance with Method 513 of MIL-STD-810.

Code 6275 and a value, entered on the SRS, will specify the A level in gravity units (g). The A level is the highest possible known or unknown forward acceleration of the vehicle in which the device is to be mounted. It is used to determine test levels of acceleration in accordance with the vehicle category and procedure(s) selected.

Code 6240, 6241, 6242, 6243 or 6244 and an "X", entered on the SRS, will specify the vehicle category. Only one category may be specified. Codes and categories are as follows:

6240	Airplane
6241	Helicopter
6242	Manned Aerospace Vehicle
6243	Air Launched Missile
6244	Ground Launched Missile

Code 6256 and a Roman numeral, entered on the SRS, will specify the procedure number when both procedures are not required. Procedure I is a nonoperating test, whereas the device under test is operated during Procedure II.

Code 6259 and a value, entered on the SRS, will specify the duration in minutes which the device under test shall be accelerated in each direction.

Code 6271 is the 1006 requirement code (5.4).

Code 6272 is the 1006 except requirement code (5.4).

To detail acceleration requirements, it is mandatory to use Code 6273. Other codes are optional.

Code 6273 and an "X", entered on the SRS, will specify there shall be no evidence of physical damage after test.

Code 1594 and an "X", entered on the SRS, will specify the regulation shall remain within specified tolerance.

Code 1595 and a value, entered on the SRS, will specify the minimum regulation in percent. Code 1595 is used when the minimum regulation requirement specified, in Table II, can be relaxed after being subjected to the acceleration test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.16 Acoustical Noise

Code 1600 is the 1006 test code (5.4).

Code 1601 is the 1006 except test code (5.4).

To detail an acoustical noise test, it is mandatory to use Code 1603. Other codes are optional.

Code 1603 and a letter, entered on the SRS, will specify the test shall be performed in accordance with test category specified in Procedure I of Method 515 of MIL-STD-810.

Code 1605 and an "X", entered on the SRS, will specify the device(s) shall be operated during the test.

Code 1607 and an "X", entered on the SRS, will specify the device(s) shall be monitored during the test via hardline. Do not use Code 1608 with Code 1607.

Code 1608 and an "X", entered on the SRS, will specify the device(s) shall be monitored during the test via telemetry. Do not use Code 1607 with Code 1608.

Code 1610 is the 1006 requirement code (5.4).

Code 1611 is the 1006 except requirement code (5.4).

Code 1613 and a value, entered on the SRS, will specify the maximum ripple voltage in volts rms.

Code 1615 and a value, entered on the SRS, will specify the maximum noise voltage in volts rms.

5.17 Altitude

Code 1618 is the 1006 test code (5.4).

Code 1619 is the 1006 except test code (5.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

To detail an altitude test, it is mandatory to use Code 1621. Other codes are optional.

Code 1621 and an "X", entered on the SRS, will specify the altitude test shall be performed in accordance with MIL-STD-810, Method 500.

Code 1625 and a value, entered on the SRS, will specify the test altitude in feet. When Code 1627 is used with Code 1625, equivalent values must be entered.

Code 1627 and a value, entered on the SRS, will specify the test altitude in metres. When Code 1625 is used with Code 1627, equivalent values must be entered.

Code 1629 and a value, entered on the SRS, will specify the test pressure in kilopascals. When Code 1630 is used with Code 1629, equivalent values must be entered.

Code 1630 and a value, entered on the SRS, will specify the test pressure in torr, when Code 1629 is used with Code 1630, equivalent values must be entered.

Code 1632 and a value, entered on the SRS, will specify the maximum rate of pressure change in kilopascal per second. When Code 1633 is used with Code 1632, equivalent values must be entered.

Code 1633 and a value, entered on the SRS, will specify the maximum rate of pressure change in torr per second. When Code 1632 is used with Code 1633, equivalent values must be entered.

Code 1635 is the 1006 requirement code (5.4).

Code 1636 is the 1006 except requirement code (5.4).

To detail altitude requirements, it is mandatory to use Code 1638. Other codes are optional.

Code 1638 and an "X", entered on the SRS, will specify there shall be no erratic operation or malfunction.

Code 1639 and an "X", entered on the SRS, will specify the regulation shall remain within specified tolerance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.18 Closing Voltage

Code 1642 is the 1006 test code (5.4).

Code 1643 is the 1006 except test code (5.4).

Code 1645 and an "X", entered on the SRS, will specify the test shall be performed in accordance with MIL-R-10265.

Code 1648 is the 1006 requirement code (5.4).

Code 1649 is the 1006 except requirement code (5.4).

Code 1651 and a value, entered on the SRS, will specify the closing voltage in volts.

Code 1652 and a value, entered on the SRS, will specify the plus or minus closing voltage tolerance in volts.

5.19 Control Signal

Code 1670 is the 1006 test code (5.4).

Code 1671 is the 1006 except test code (5.4).

To detail a control signal test, it is mandatory to use Code 1672. Other codes are optional.

Code 1672 and an "X", entered on the SRS, will specify the test shall be performed in accordance with MIL-R-82515.

Code 1673 and a value, entered on the SRS, will specify the output control voltage load in ohms.

Code 1666 and a value, entered on the SRS, will specify the positive output control voltage terminal(s).

Code 1667 and a value, entered on the SRS, will specify the negative output control voltage terminals(s).

Code 1668 and an "X", entered on the SRS, will specify the input voltage shall be in accordance with Table III (Section 8).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

The input voltage is specified, utilizing Table III (Section 8) as follows:

Code 4000 and a value, entered on the SRS, will specify the input voltage in volts.

Code 4001 and a value, entered on the SRS, will specify the plus or minus input voltage tolerance in volts.

Code 4002 and a value, entered on the SRS, will specify one of the terminals for measuring the control signal voltage.

Code 4003 and a value, entered on the SRS, will specify the other terminal for measuring the control signal voltage.

Code 4004 and a value, entered on the SRS, will specify the control signal voltage in volts.

Code 4005 and a value, entered on the SRS, will specify the plus or minus control signal voltage tolerance in volts.

Code 1675 is the 1006 requirement code (5.4).

Code 1676 is the 1006 except requirement code (5.4).

To detail control signal requirements, it is mandatory to use codes from Table III (Section 8).

5.20 Current Regulation

Code 1680 is the 1006 test code (5.4).

Code 1681 is the 1006 except test code (5.4).

Code 1682 and a value, entered on the SRS, will specify the minimum input voltage as a percent of the rated input voltage.

Code 1683 and a value, entered on the SRS, will specify the maximum input voltage as a percent of the rated input voltage.

Code 1684 and a value, entered on the SRS, will specify the minimum test temperature in degrees Celsius.

Code 1685 and a value, entered on the SRS, will specify the maximum test temperature in degrees Celsius.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1686 and a value, entered on the SRS, will specify the minimum input frequency in hertz.

Code 1687 and a value, entered on the SRS, will specify the maximum input frequency in hertz.

Code 1688 and a value, entered on the SRS, will specify the number of load steps. If Code 1688 is used, Code 1689 is mandatory.

Code 1689 and a value, entered on the SRS, will specify load per step in percent of the rated load. If Code 1689 is used, Code 1688 is mandatory.

Code 1691 is the 1006 requirement code (5.4).

Code 1692 is the 1006 except requirement code (5.4).

Code 1694 and a value, entered on the SRS, will specify the maximum recovery time between any load step in milliseconds.

Code 1696 and a value, entered on the SRS, will specify the minimum current regulation for any load step in percent.

5.21 Dielectric Withstanding Voltage at Reduced Barometric Pressure

Code 4883 is the 1006 test code (5.4).

Code 4884 is the 1006 except test code (5.4).

To detail a dielectric withstanding voltage test at reduced barometric pressure, Codes 6300, 4886, and either Code 4849 or 4885, are mandatory. Other codes are optional. Information concerning them is as follows:

Code 6300 and an "X", entered on the SRS, will specify the dielectric withstanding voltage at reduced barometric pressure test shall be performed in accordance with Method 301 of MIL-STD-202.

Code 4886 and a letter, entered on the SRS, will specify the altitude shall be in accordance with Method 105 of MIL-STD-202 and test condition letter specified.

Code 4885 and a value, entered on the SRS, will specify dc test voltage. Do not use Code 4885 with Code 4849.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 4849 and a value, entered on the SRS, will specify ac test voltage. Do not use Code 4849 with Code 4885.

Code 6293 and an "X", entered on the SRS, will specify the test voltage shall be applied between insulated parts and ground.

Code 6294 and an "X", entered on the SRS, will specify the test voltage shall be applied between current carrying parts and case.

Code 6292 and an "X", entered on the SRS, will specify the test voltage shall be applied between mutually insulated parts.

Code 4859 and a document designation, entered on the SRS, will specify special preparations shall be in accordance with the document (5.7).

Code 4891 and a value, entered on the SRS, will specify the duration of voltage application in seconds. Code 4891 is used only if the duration required is other than 60 seconds.

Code 6280 and a document designation, entered on the SRS, will specify mounting shall be in accordance with the document (5.7).

Code 4907 is the 1006 requirement code (5.4).

Code 4908 is the 1006 except requirement code (5.4).

To detail requirements, Code 4906 is mandatory and the other code is optional. Information concerning them is as follows:

Code 4906 and an "X", entered on the SRS, will specify there shall be no evidence of flashover, mechanical damage, arcing, or insulation breakdown.

Code 4894 and a value, entered on the SRS, will specify the maximum leakage in milliamperes.

5.22 Dielectric Withstanding Voltage at Sea Level

Code 4860 is the 1006 test code (5.4).

Code 4861 is the 1006 except test code (5.4).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

To detail a dielectric withstanding voltage at sea level test, it is mandatory to use the Dielectric Withstanding Voltage Test Table (Table IV, Section 8) or Code 4862.

The dielectric Withstanding Voltage Test Table (Table IV, Section 8) is used as follows:

Code 4300 and a terminal designation, entered on the SRS, will specify one of the application points for the test voltage.

Code 4301 and a terminal designation, entered on the SRS, will specify the other application point for the test voltage.

Code 4302 and terminal designations, entered on the SRS, will specify the terminals that are to be shorted during the test.

Code 4303 and a value, entered on the SRS, will specify the test voltage in volts ac.

Code 4304 and a value, entered on the SRS, will specify the test frequency in hertz.

Code 4305 and a value, entered on the SRS, will specify the test voltage in volts dc.

Code 4306 and a value, entered on the SRS, will specify the circuit component that must be disconnected during the test.

The remaining lines are used in a similar manner.

Code 4862 and an "X", entered on the SRS, will specify the dielectric withstanding voltage at sea level test shall be performed in accordance with Method 301 of MIL-STD-202.

Code 4869 and a value, entered on the SRS, will specify the test voltage regulation in percent.

Code 4867 and a value, entered on the SRS, will specify the duration of applied test voltage in seconds. When Code 4867 is used, do not use Code 4851.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

Code 4851 and a value, entered on the SRS, will specify the duration of applied test voltage in minutes. When Code 4851 is used, do not use Code 4867.

Code 4897 and a value, entered on the SRS, will specify the maximum surge current in milliamperes. When Code 4897 is used, do not use Code 4717.

Code 4717 and a value, entered on the SRS, will specify the maximum surge current in amperes. When Code 4717 is used, do not use Code 4897.

Code 4844 and an "X", entered on the SRS, will specify the points of application of test voltage shall be between mutually insulated parts. When Code 4844 is used, do not use Code 4845 or 4846.

Code 4845 and an "X", entered on the SRS, will specify the points of application of test voltage shall be between insulated parts and ground. When Code 4845 is used, do not use Code 4844 or 4846.

Code 4846 and an "X", entered on the SRS, will specify the points of application of test voltage shall be between current carrying parts and case. When Code 4846 is used, do not use Code 4844 or 4845.

Code 5000 and a document designation, entered on the SRS, will specify mounting shall be in accordance with the document (5.7).

Code 4873 is the 1006 requirement code (5.4).

Code 4874 is the 1006 except requirement code (5.4).

To detail the dielectric withstanding voltage at sea level requirements, it is mandatory to use Code 4856. Other codes are optional.

Code 4856 and an "X", entered on the SRS, will specify there shall be no evidence of flashover, mechanical damage, arcing, or insulation breakdown.

Code 4875 and a value, entered on the SRS, will specify the maximum leakage current in milliamperes. Code 4875 is used, do not use Code 4817.

Code 4817 and a value, entered on the SRS, will specify the maximum leakage current in microamperes. Code 4817 is used, do not use Code 4875.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.23 Efficiency

Code 1700 is the 1006 test code (5.4).

Code 1701 is the 1006 except test code (5.4).

Code 1703 and a value, entered on the SRS, will specify the electrical load in ohms.

Code 1704 and a value, entered on the SRS, will specify the power factor as a ratio.

Code 1705 and a value, entered on the SRS, will specify the input voltage in volts dc.

Code 1706 and a value, entered on the SRS, will specify the input voltage in volts ac.

Code 1707 and a value, entered on the SRS, will specify the input voltage tolerance as plus or minus volts.

Code 1708 and a value, entered on the SRS, will specify the output regulated voltage in volts.

Code 1710 is the 1006 requirement code (5.4).

Code 1711 is the 1006 except requirement code (5.4).

Code 1714 and a value, entered on the SRS, will specify the minimum efficiency in percent.

5.24 Electrical Shock

Code 1717 is the 1006 test code (5.4).

Code 1718 is the 1006 except test code (5.4).

Code 1720 and a value, entered on the SRS, will specify the input voltage one in percent of the maximum input voltage.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1721 and a value, entered on the SRS, will specify the input voltage two in percent of the maximum input voltage.

Code 1722 and a value, entered on the SRS, will specify the input voltage three in percent of the maximum input voltage.

Code 1724 and a value, entered on the SRS, will specify the test temperature in degrees Celsius.

Code 1725 and a value, entered on the SRS, will specify the plus or minus test temperature tolerance in degrees Celsius.

Code 1726 and a value, entered on the SRS, will specify the on duration of the input voltage in seconds.

Code 1727 and a value, entered on the SRS, will specify the off duration of the input voltage in seconds.

Code 1728 and a value, entered on the SRS, will specify the number of "on", "off" test cycles.

Code 1730 is the 1006 requirement code (5.4).

Code 1731 is the 1006 except requirement code (5.4).

To detail the electrical shock test requirements, it is mandatory to use Code 1732. Other codes are optional.

Code 1732 and an "X", entered on the SRS, will specify there shall be no evidence of electrical or mechanical damage.

Code 1733 and a value, entered on the SRS, will specify the output current in amperes.

Code 1734 and a value, entered on the SRS, will specify the minimum output voltage in volts.

Code 1735 and a value, entered on the SRS, will specify the maximum output voltage in volts.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

5.25 Emergency Power Source

Code 1740 is the 1006 requirement code (5.4).

Code 1741 is the 1006 except requirement code (5.4).

Code 1742 and a value, entered on the SRS, will specify the type of battery for the emergency power source.

Code 1743 and a value, entered on the SRS, will specify the number of battery(s) for the emergency power source.

Code 1750 is the 1006 requirement code (5.4).

Code 1751 is the 1006 except requirement code (5.4).

Code 1752 and a value, entered on the SRS, will specify the output voltage in volts.

Code 1753 and a value, entered on the SRS, will specify the plus or minus output voltage tolerance in volts.

5.26 Endurance

Code 1760 is the 1006 test code (5.4).

Code 1761 is the 1006 except test code (5.4).

Code 1762 and a value, entered on the SRS, will specify the test duration in hours.

Code 1763 and a value, entered on the SRS, will specify the electrical load as a percent of the rated load.

Code 1764 and a value, entered on the SRS, will specify the period the electrical load shall be switched alternately on and off in seconds.

Code 1765 and a value, entered on the SRS, will specify the maximum measurement interval in hours.

Code 1770 is the 1006 requirement code (5.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1771 is the 1006 except requirement code (5.4).

Code 1772 and a value, entered on the SRS, will specify the maximum output voltage drift in percent.

Code 1773 and a value, entered on the SRS, will specify the maximum output frequency drift in percent.

Code 1774 and an "X", entered on the SRS, will specify no part of the device(s) shall show excessive wear.

Code 1775 and a value, entered on the SRS, will specify the minimum regulation in percent.

5.27 Explosion

Code 1780 is the 1006 test code (5.4).

Code 1781 is the 1006 except test code (5.4).

To detail the explosion test method, Code 1782 is mandatory.

Code 1782 and a value, entered on the SRS, will specify the test shall be performed in accordance with MIL-STD-810, Method 511, and procedure number specified.

Code 1783 and a value, entered on the SRS, will specify the chamber temperature in degrees Celsius. When Code 1783 is used, Code 1784 is mandatory.

Code 1784 and a value, entered on the SRS, will specify the chamber temperature tolerance in plus or minus degrees Celsius. When Code 1784 is used, Code 1783 is mandatory.

Code 1785 and a value, entered on the SRS, will specify the electrical load in percent of the rated load.

Code 1790 is the 1006 requirement code (5.4).

Code 1791 is the 1006 except requirement code (5.4).

Code 1792 and an "X", entered on the SRS, will specify there shall be no evidence of an explosion or violent burning.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.28 Flammability

Code 1800 is the 1006 test code (5.4).

Code 1801 is the 1006 except test code (5.4).

To detail the flammability test, Code 1802 is mandatory. Other codes are optional.

Code 1802 and an "X", entered on the SRS, will specify the flammability test shall be performed in accordance with Method 111 of MIL-STD-202.

Code 1803 and an "X", entered on the SRS, will specify the axis direction of the flame shall be any suitable direction. When Code 1802 is used, do not use Code 1804 or 1805.

Code 1804 and an "X", entered on the SRS, will specify the direction of the flame shall be horizontal. When Code 1804 is used, do not use Code 1803 or 1805.

Code 1805 and a document designation, entered on the SRS, will specify the axis direction of the flame shall be in accordance with the document specified. When Code 1805 is used, do not use Code 1803 or 1804.

Code 1806 and an "X", entered on the SRS, will specify the requirement point of the flame shall be any suitable point. When Code 1806 is used, do not use Code 1807.

Code 1807 and a document designation, entered on the SRS, will specify the impingement point of the flame shall be in accordance with the document specified. When Code 1807 is used, do not use Code 1806.

Code 1808 and a value, entered on the SRS, will specify the duration of flame application in seconds.

Code 1810 is the 1006 requirement code (5.4).

Code 1811 is the 1006 except requirement code (5.4).

To detail the flammability requirements, Code 1812 is mandatory, other are optional.

Code 1812 and an "X", entered on the SRS, will specify there shall be no explosive type fire.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1813 and an "X", entered on the SRS, will specify there shall be no dripping of flammable material.

Code 1814 and a value, entered on the SRS, will specify the burning time shall be not greater than the specified value in seconds.

Code 1815 and an "X", entered on the SRS, will specify the regulation shall remain within specified limits.

5.29 Frequency Regulation

Code 1820 is the 1006 test code (5.4).

Code 1821 is the 1006 except test code (5.4).

Code 1822 and a value, entered on the SRS, will specify the minimum ambient test temperature in degrees Celsius.

Code 1823 and a value, entered on the SRS, will specify the maximum ambient test temperature in degrees Celsius.

Code 1824 and a value, entered on the SRS, will specify the ambient test temperature tolerance in plus or minus degrees Celsius.

Code 1825 and a value, entered on the SRS, will specify the measurement interval in minutes.

Code 1826 and a value, entered on the SRS, will specify the minimum lagging power factor as a ratio. When Code 1826 is used, do not use Code 1827.

Code 1827 and a value, entered on the SRS, will specify the minimum leading power factor as a ratio. When Code 1827 is used, do not use Code 1826.

Code 1828 and a value, entered on the SRS, will specify the maximum test altitude in feet. When Code 1829 is used with Code 1828, equivalent values must be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1829 and a value, entered on the SRS, will specify the maximum test altitude in metres. When Code 1828 is used with Code 1829, equivalent values must be used.

Code 1830 and a value, entered on the SRS, will specify the rotating increments from the normal position in degrees.

Code 1831 and a value, entered on the SRS, will specify the minimum input voltage as a percent of the rated maximum voltage.

Code 1832 and a value, entered on the SRS, will specify the maximum input voltage as a percent of the rated maximum voltage.

Code 1833 and a value, entered on the SRS, will specify the minimum load in ohms.

Code 1834 and a value, entered on the SRS, will specify the maximum load in ohms.

Code 1840 is the 1006 requirement code (5.4).

Code 1841 is the 1006 except requirement code (5.4).

Code 1842 and a value, entered on the SRS, will specify the maximum frequency deviation in plus or minus hertz.

Code 1843 and a value, entered on the SRS, will specify the minimum frequency to voltage ratio.

Code 1844 and a value, entered on the SRS, will specify the maximum frequency to voltage ratio.

5.30 Fungus

Code 4753 is the 1006 test code (5.4).

Code 4754 is the 1006 except test code (5.4).

*To detail the fungus test method, Code 4755 is mandatory.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 4755 and an "X", entered on the SRS, will specify the test shall be performed in accordance with Method 508 of MIL-STD-810.

Code 4756 and a value, entered on the SRS, will specify the test period in number of days. This code is only used when the test period is other than 28 days.

Code 4763 and an "X", entered on the SRS, will specify the device(s) shall be operated during the test.

Code 4759 is the 1006 requirement code (5.4).

Code 4760 is the 1006 except requirement code (5.4).

Code 4761 and an "X", entered on the SRS, will specify that all external materials shall be nonnutrient to fungus growth or shall be suitably treated to retard fungus growth. The manufacturer shall verify by certification that all external materials are fungus resistant or shall perform the fungus test as specified. When the fungus test is performed, there shall be no evidence of fungus growth on the external surfaces.

Code 4762 and an "X", entered on the SRS, will specify that all external materials shall be nonnutrient to fungus growth or shall be suitably treated to retard fungus growth. When the fungus test specified is performed, there shall be no evidence of fungus growth on the external surfaces.

5.31 Humidity

Code 4787 is the 1006 test code (5.4).

Code 4788 is the 1006 except test code (5.4).

To detail the humidity test method, Codes 4871 and 4767 are mandatory. Other codes are optional.

Code 4871 and an "X", entered on the SRS, will specify the test shall be performed in accordance with Method 507 of MIL-STD-810. When Code 4871 is used, Code 4767 is mandatory.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 4767 and a value, entered on the SRS, will specify the procedure number in Method 507 of MIL-STD-810. When Code 4767 is used, Code 4871 is mandatory.

Code 4796 and an "X", entered on the SRS, will specify the device(s) shall be exposed to temperature extremes prior to the test.

Code 4777 and a value, entered on the SRS, will specify the maximum test temperature in degrees Celsius. When Code 4777 is used, Code 4778 is mandatory.

Code 4778 and a value, entered on the SRS, will specify the duration of the test temperature in hours. When Code 4778 is used, Code 4777 is mandatory.

Code 4800 and a value, entered on the SRS, will specify the number of test cycles. Code 4800 is used when the number of test cycles is other than twenty in Procedure V.

Code 4816 and a value, entered on the SRS, will specify the test duration in hours.

Code 4797 is the 1006 requirement code (5.4).

Code 4798 is the 1006 except requirement code (5.4).

Code 4799 and an "X", entered on the SRS, will specify there shall be no evidence of corrosion or physical damage.

Code 1865 and an "X", entered on the SRS, will specify the regulation shall remain within specified tolerances.

5.32 Insulation Resistance

Code 1370 is the 1006 test code (5.4).

Code 1371 is the 1006 except test code (5.4).

To detail the insulation resistance test method, Code 1511 and Code 1378 or 1373 are mandatory. Other codes are optional.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1511 and an "X", entered on the SRS, will specify to test in accordance with Method 302 of MIL-STD-202.

Code 1378 and a letter, entered on the SRS, will specify the test condition letter shall apply. Do not use Code 1378 with Code 1373.

Code 1373 and a value, entered on the SRS, will specify the test voltage in volts dc. Do not use Code 1373 with Code 1378.

Code 1376 and a value, entered on the SRS, will specify the electrification duration in seconds.

Code 1377 and a value, entered on the SRS, will specify the maximum measurement error in percent.

Code 2132 and a value, entered on the SRS, will specify the test temperature in degrees Celsius. When Code 2132 is used, Code 1383 is mandatory.

Code 1383 and a value, entered on the SRS, will specify the test temperature tolerance in plus or minus degrees Celsius. When Code 1383 is used, Code 2132 is mandatory.

Code 2133 and a value, entered on the SRS, will specify the test terminal numbers or identification.

Code 1379 is the 1006 requirement code (5.4).

Code 1380 is the 1006 except requirement code (5.4).

Code 1407 and an "X", entered on the SRS, will specify there shall be no evidence of physical damage.

Code 1386 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms.

5.33 Leakage (Immersion)

Code 1866 is the 1006 test code (5.4).

Code 1867 is the 1006 except test code (5.4).

To detail the leakage (immersion) test method, Codes 1868 and 1869 are mandatory. Other codes are optional.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1868 and an "X", entered on the SRS, will specify the test shall be performed in accordance with Method 512 of MIL-STD-810. When Code 1868 is used, Code 1869 is mandatory.

Code 1869 and a value, entered on the SRS, will specify the test shall be performed in accordance with MIL-STD-810, Method 512, and procedure number specified. When Code 1869 is used, Code 1868 is mandatory.

Code 1870 and an "X", entered on the SRS, will specify the device(s) shall be in a transit condition for the test. When Code 1870 is used, do not use Code 1871.

Code 1871 and an "X", entered on the SRS, will specify the device(s) shall be in an operational condition for the test. When Code 1871 is used, do not use Code 1870.

Code 1874 and a value, entered on the SRS, will specify the duration between the final test cycle and measurements in hours.

Code 1878 is the 1006 requirement code (5.4).

Code 1879 is the 1006 except requirement code (5.4).

Code 1863 and an "X", entered on the SRS, will specify there shall be no evidence of physical damage.

Code 1864 and an "X", entered on the SRS, will specify there shall be no evidence of moisture penetration.

Code 1873 and an "X", entered on the SRS, will specify the regulation shall remain within specified tolerances.

5.34 Opening Current

Code 1875 is the 1006 test code (5.4).

Code 1876 is the 1006 except test code (5.4).

Code 1877 and an "X", entered on the SRS, will specify the opening current test shall be performed in accordance with MIL-R-10265.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1880 is the 1006 requirement code (5.4).

Code 1881 is the 1006 except requirement code (5.4).

Code 1882 and a value, entered on the SRS, will specify the minimum opening current in percent of the rated current.

Code 1883 and a value, entered on the SRS, will specify the maximum opening current in percent of the rated current.

5.35 Operating Position

Code 1890 is the 1006 test code (5.4).

Code 1891 is the 1006 except test code (5.4).

To detail the operating position test method, Code 1892 is mandatory. Other codes are optional.

Code 1892 and a document designation, entered on the SRS, will specify the test shall be performed in accordance with the document.

Code 1893 and an "X", entered on the SRS, will specify any position operation shall be verified during other tests.

Code 1894 and a value, entered on the SRS, will specify the rotation increments in degrees. When Code 1894 is used, Code 1895 is mandatory.

Code 1895 and a value, entered on the SRS, will specify the total rotation of the device(s) during the test in degrees. When Code 1895 is used, Code 1894 is mandatory.

Code 1897 and an "X", entered on the SRS, will specify the device(s) shall be rotated in each major axis from the normal horizontal position.

Code 1898 and a value, entered on the SRS, will specify the device(s) shall be rotated in each major axis from the normal horizontal position except the axis identified.

Code 1900 is the 1006 requirement code (5.4).

Code 1901 is the 1006 except requirement code (5.4).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1902 and an "X", entered on the SRS, will specify there shall be no evidence of physical damage or degradation of performance.

Code 1903 and a value, entered on the SRS, will specify the minimum regulation in any specified position in percent.

5.36 Output Current

Code 1910 is the 1006 test code (5.4).

Code 1911 is the 1006 except test code (5.4).

Code 1912 and a value, entered on the SRS, will specify the minimum input voltage in volts.

Code 1913 and a value, entered on the SRS, will specify the maximum input voltage in volts.

Code 1914 and a value, entered on the SRS, will specify the voltage applied to the battery terminals in volts.

Code 1915 and a value, entered on the SRS, will specify the plus or minus voltage tolerance applied to the battery terminals in volts.

Code 1916 and a value, entered on the SRS, will specify the load resistance in ohms.

Code 1917 and a value, entered on the SRS, will specify the plus or minus load resistance tolerance in ohms.

Code 1920 is the 1006 requirement code (5.4).

Code 1921 is the 1006 except requirement code (5.4).

Code 1922 and a value, entered on the SRS, will specify the minimum output current in amperes.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

5.37 Output Impedance

Code 1925 is the 1006 test code (5.4).

Code 1926 is the 1006 except test code (5.4).

Code 1927 and a value, entered on the SRS, will specify the input voltage for test one in volts.

Code 1928 and a value, entered on the SRS, will specify the plus or minus input voltage tolerance for test one in volts.

Code 1929 and a value, entered on the SRS, will specify the input frequency for test one in hertz.

Code 1930 and a value, entered on the SRS, will specify the plus or minus input frequency tolerance in hertz.

Code 1931 and a value, entered on the SRS, will specify the input voltage for test two in volts.

Code 1932 and a value, entered on the SRS, will specify the plus or minus input voltage tolerance for test two in volts.

Code 1933 and a value, entered on the SRS, will specify the input frequency for test two in hertz.

Code 1934 and a value, entered on the SRS, will specify the plus or minus input frequency tolerance in hertz.

Code 1935 and a value, entered on the SRS, will specify the input voltage for test three in volts.

Code 1936 and a value, entered on the SRS, will specify the plus or minus input voltage tolerance for test three in volts.

Code 1937 and a value, entered on the SRS, will specify the input frequency for test three in hertz.

Code 1938 and a value, entered on the SRS, will specify the plus or minus input frequency tolerance in hertz.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

Code 1939 and a value, entered on the SRS, will specify the electrical load in ohms.

Code 1940 and a value, entered on the SRS, will specify the plus or minus electrical load tolerance in ohms.

Code 1945 is the 1006 requirement code (5.4).

Code 1946 is the 1006 except requirement code (5.4).

Code 1947 and a value, entered on the SRS, will specify the minimum output voltage for test one in volts.

Code 1948 and a value, entered on the SRS, will specify the maximum output voltage for test one in volts.

Code 1949 and a value, entered on the SRS, will specify the maximum output impedance for test one in ohms.

Code 1950 and a value, entered on the SRS, will specify the minimum output voltage for test two in volts.

Code 1951 and a value, entered on the SRS, will specify the maximum output voltage for test two in volts.

Code 1952 and a value, entered on the SRS, will specify the maximum output impedance for test two in ohms.

Code 1953 and a value, entered on the SRS, will specify the minimum output voltage for test three in volts.

Code 1954 and a value, entered on the SRS, will specify the maximum output voltage for test three in volts.

Code 1955 and a value, entered on the SRS, will specify the maximum output impedance for test three in ohms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.38 Output Voltage Adjust

Code 1960 is the 1006 test code (5.4).

Code 1961 is the 1006 except test code (5.4).

To detail an output voltage adjust test, it is mandatory to use the output voltage Adjust Test Table (Table V, Section 8).

The Output Voltage Adjust Test Table (Table V, Section 8) is used as follows:

Code 4100 and a value, entered on the SRS, will specify the input voltage in volts.

Code 4101 and a value, entered on the SRS, will specify the plus or minus input voltage tolerance in volts.

Code 4102 and a value, entered on the SRS, will specify the input frequency in hertz.

Code 4103 and a value, entered on the SRS, will specify the plus or minus input frequency tolerance in hertz.

Code 4104 and a value, entered on the SRS, will specify the minimum output load in amperes.

Code 4105 and a value, entered on the SRS, will specify the maximum output load in amperes.

Code 4106 and a value, entered on the SRS, will specify the minimum output voltage in volts.

Code 4107 and a value, entered on the SRS, will specify the maximum output voltage in volts.

The remaining lines in Table V are used in a similar manner.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1965 is the 1006 requirement code (5.4).

Code 1966 is the 1006 except requirement code (5.4).

To detail an output voltage adjust test requirements, it is mandatory to use Code 1967.

Code 1967 and an "X", entered on the SRS, will specify the requirements shall be in accordance with the Output Voltage Adjust Table (Table V, Section 8).

5.39 Over Voltage Protection

Code 1970 is the 1006 test code (5.4).

Code 1971 is the 1006 except test code (5.4).

Code 1972 and a value, entered on the SRS, will specify the maximum input voltage in volts.

Code 1973 and a value, entered on the SRS, will specify the maximum output voltage in volts.

Code 1974 and a value, entered on the SRS, will specify the maximum output current in amperes.

Code 1980 is the 1006 requirement code (5.4).

Code 1981 is the 1006 except requirement code (5.4).

Code 1982 and an "X", entered on the SRS, will specify the output voltage and current shall drop to zero when the input is maximum.

Code 1983 and an "X", entered on the SRS, will specify the output voltage and current shall recover automatically when the input is decreased from the maximum value.

Code 1984 and an "X", entered on the SRS, will specify the output voltage and current shall recover by manual operation when the input is decreased from the maximum value.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.40 Parallel Operation

Code 1990 is the 1006 test code (5.4).

Code 1991 is the 1006 except test code (5.4).

Code 1992 and a value, entered on the SRS, will specify the number of electrical load steps. When Code 1992 is used, Code 1993 is mandatory.

Code 1993 and a value, entered on the SRS, will specify the electrical load per step in percent of the rated load. When Code 1993 is used, Code 1992 is mandatory.

Code 1994 and a value, entered on the SRS, will specify the number of devices to be connected in parallel.

Code 1996 is the 1006 requirement code (5.4).

Code 1997 is the 1006 except requirement code (5.4).

Code 1998 and a value, entered on the SRS, will specify the maximum load sharing difference in percent.

Code 1999 and a value, entered on the SRS, will specify the maximum value of the equalizing resistance in ohms.

Code 2000 and a value, entered on the SRS, will specify the maximum voltage decrease in volts.

Code 2001 and a value, entered on the SRS, will specify the maximum equalizer terminal current in amperes.

Code 2002 and a value, entered on the SRS, will specify the minimum regulation for any load step in percent.

5.41 Polarity

Code 2005 is the 1006 test code (5.4).

Code 2006 is the 1006 except test code (5.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 2008 and a value, entered on the SRS, will specify the positive input voltage terminal. When Code 2008 is used, Codes 2009 and 2010 are mandatory.

Code 2009 and a value, entered on the SRS, will specify the negative input voltage terminal. When Code 2009 is used, Codes 2008 and 2010 are mandatory.

Code 2010 and a value, entered on the SRS, will specify the input ground terminal. When Code 2010 is used, Codes 2008 and 2009 are mandatory.

Code 2011 and a value, entered on the SRS, will specify the reverse input positive voltage terminal.

Code 2012 and a value, entered on the SRS, will specify the reverse input negative voltage terminal.

Code 2015 is the 1006 requirement code (5.4).

Code 2016 is the 1006 except requirement code (5.4).

Code 2019 and a value, entered on the SRS, will specify the positive output voltage terminal. When Code 2019 is used, Codes 2020 and 2021 are mandatory.

Code 2020 and a value, entered on the SRS, will specify the negative output voltage terminal. When Code 2020 is used, Codes 2019 and 2021 are mandatory.

Code 2021 and a value, entered on the SRS, will specify the output ground terminal. When Code 2021 is used, Codes 2019 and 2020 are mandatory.

Code 2022 and an "X", entered on the SRS, will specify there shall be no evidence of damage and the correct output voltage polarity is maintained when the input polarity is reversed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.42 Radio Interference

Code 2025 is the 1006 test code (5.4).

Code 2026 is the 1006 except test code (5.4).

To detail the radio interference test method, Code 2007 is mandatory. Other codes are optional.

Code 2007 and an "X", entered on the SRS, will specify the test shall be performed in accordance with MIL-STD-462.

Code 2027 and a value, entered on the SRS, will specify the number of load steps. When Code 2027 is used, Code 2028 is mandatory.

Code 2028 and a value, entered on the SRS, will specify the load per step as a percent of the rated load. When Code 2028 is used, Code 2027 is mandatory.

Code 2031 and a value, entered on the SRS, will specify the number identifying the equipment class.

Code 2029 and an "X", entered on the SRS, will specify the conducted radio interference shall be measured.

Code 2030 and an "X", entered on the SRS, will specify the radiated radio interference shall be measured.

Code 2035 is the 1006 requirement code (5.4).

Code 2036 is the 1006 except requirement code (5.4).

Code 2037 and an "X", entered on the SRS, will specify the requirements shall be in accordance with MIL-STD-461.

Code 2038 and an "X", entered on the SRS, will specify there shall be no adverse interference to adjacent equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.43 Recovery Time

Code 2050 is the 1006 test code (5.4).

Code 2051 is the 1006 except test code (5.4).

To detail the recovery time test method, it is mandatory to use the Recovery Time Test Table (Table VI, Section 8).

The Recovery Time Test Table (Table VI, Section 8) is used as follows:

Code 4060 and a value, entered on the SRS, will specify the test temperature in degrees Celsius.

Code 4061 and a value, entered on the SRS, will specify the electrical load in percent of the rated load.

Code 4062 and a value, entered on the SRS, will specify the electrical load as a percent of the rated load. The electrical load specified with Code 4061 shall be switched to the electrical load specified with Code 4062.

Code 4063 and a value, entered on the SRS, will specify the electrical load as a percent of the rated load. The electrical load specified with Code 4062 shall be switched to the electrical load specified with Code 4063.

Code 4064 and a value, entered on the SRS, will specify the output voltage as a percent of the rated voltage.

Code 4065 and a value, entered on the SRS, will specify the minimum recovery voltage as a percent of the rated output voltage.

Code 4066 and a value, entered on the SRS, will specify the maximum recovery time in seconds.

The remaining lines of Table VI may be used in a similar manner.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 2055 is the 1006 requirement code (5.4).

Code 2056 is the 1006 except requirement code (5.4).

Code 2057 and an "X", entered on the SRS, will specify there shall be no sustained oscillations.

Code 2058 and a value, entered on the SRS, will specify the maximum number of oscillations above the ripple level.

Code 2059 and a value, entered on the SRS, will specify the figure number in MIL-STD-704 for the voltage transient requirements.

Code 2060 and an "X", entered on the SRS, will specify the requirements shall be in accordance with the Recovery Time Test Table, (Table VI, Section 8). Columns 6 and 7.

5.44 Reliability Screening (Burn-In, Aging, Conditioning, Stabilization, Load Life, Overload)

The established reliability military specifications, Group A inspection, include tests that are designed to apply appropriate stresses and inspections at a level which will not jeopardize usage or shorten the life of acceptable parts, but which will reveal defects and accelerate failure mechanisms that are detectable by inspection or parameter measurement. This stress testing is entitled voltage aging, conditioning, voltage conditioning, high voltage stabilization, burn-in, overload, load-life, etc., in the various specifications. For the purposes of MIL-STD-35, the term "Reliability Screening" has been chosen to encompass all the above titles. The voltage code can be assigned a value of 25 degrees Celsius to affect a voltage stabilization.

Code 6695 is the 1006 test code (5.4).

Code 6696 is the 1006 except test code (5.4).

To detail a reliability screening test, Code 6697 is mandatory; either Code 6698 or 6699 is mandatory, Codes 6700 and 6701 are mandatory and other codes are optional. Information concerning them is as follows:

Code 6697 and an "X", entered on the SRS, will specify to test in accordance with Method 108 of MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

Code 6698 and a letter, entered on the SRS, will specify the test condition letter that specifies the test duration. Do not use Code 6698 with Code 6699.

Code 6699 and a value, entered on the SRS, will specify the test duration in hours. Do not use Code 6699 with Code 6698.

Code 6921 and a value, entered on the SRS, will specify the power applied as a number times rated power. Use Code 6939 to limit the voltage when required.

Code 6939 and a value, entered on the SRS, will specify the maximum voltage to be applied. Refer to Code 6921 for direction as to when this code is applicable.

Code 6710 and an "X", entered on the SRS, will specify that power shall be applied for 1.5 hours, and off for 0.5 hours. Do not use Code 6710 with Code 6713.

Code 6713 and an "X", entered on the SRS, will specify that power shall be applied continuously for the duration of the test. Do not use Code 6713 with Code 6710.

Code 6700 and a value, entered on the SRS, will specify the test temperature in degrees Celsius.

Code 6701 and a value, entered on the SRS, will specify the plus or minus temperature tolerance in degrees Celsius.

Code 6923 and an "X", entered on the SRS, will specify the device shall be mounted such that the temperature of one does not influence the temperature of any other device and there shall be no undue draft on the device.

Code 6706 and a value, entered on the SRS, will specify the volts ac to be applied during the screening test.

Code 6707 and a value, entered on the SRS, will specify the volts dc to be applied during the screening test.

Code 6920 and a value, entered on the SRS, will specify the output load in ohms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 6922 and a value, entered on the SRS, will specify the measurement interval in hours at which measurements are to be taken.

Code 6924 and a document designation, entered on the SRS, will specify mounting shall be in accordance with the document. The test name applicable shall be entered in addition to the document designation (5.7).

Code 6928 is the 1006 requirement code (5.4).

Code 6929 is the 1006 except requirement code (5.4).

Code 6930 and an "X", entered on the SRS, will specify no evidence of physical damage. This code is mandatory when requirements are to be detailed after the reliability screening test.

Code 6937 and an "X", entered on the SRS, will specify the device shall remain within specified tolerance.

Code 2065 and an "X", entered on the SRS, will specify the regulation shall remain within specified limits.

5.45 Ripple Voltage

Code 2070 is the 1006 test code (5.4).

Code 2071 is the 1006 except test code (5.4).

Code 2072 and a value, entered on the SRS, will specify the number of load steps. When Code 2072 is used, Code 2073 is mandatory.

Code 2073 and a value, entered on the SRS, will specify the load per step as a percent of the rated load. When Code 2073 is used, Code 2072 is mandatory.

Code 2074 and a value, entered on the SRS, will specify the minimum test temperature in degrees Celsius.

Code 2080 is the 1006 requirement code (5.4).

Code 2081 is the 1006 except requirement code (5.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 2082 and a value, entered on the SRS, will specify the maximum ripple voltage, at any load step, in peak volts.

Code 2083 and an "X", entered on the SRS, will specify the test requirements shall be in accordance with MIL-STD-704.

5.46 Salt Fog

Code 4776 is the 1006 test code (5.4).

Code 4779 is the 1006 except test code (5.4).

To detail the salt fog test method, Code 4780 is mandatory. Other codes are optional.

Code 4780 and an "X", entered on the SRS, will specify the test shall be performed in accordance with Method 509 of MIL-STD-810.

Code 4786 and a value, entered on the SRS, will specify the salt solution as a percent. Code 4786 is used when the required solution percentage is other than five percent.

Code 4766 and an "X", entered on the SRS, will specify the method of mounting the device(s) shall be any suitable mounting method. When Code 4766 is used, do not use Code 4765 or 4773.

Code 4765 and an "X", entered on the SRS, will specify the method of mounting shall be the normal mounting method. When Code 4765 is used, do not use Code 4766 or 4773.

Code 4773 and a document designation, entered on the SRS, will specify the method of mounting shall be in accordance with the specified document. When Code 4773 is used, do not use Code 4766 or 4765.

Code 4783 and a value, entered on the SRS, will specify the time duration the device(s) shall be exposed to the salt fog in hours. Code 4783 is used when the required exposure duration is other than forty-eight hours.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 4775 and a value, entered on the SRS, will specify the drying time duration in hours. Code 4775 is used when the required drying time duration is other than forty-eight hours.

Code 4997 is the 1006 requirement code (5.4).

Code 4998 is the 1006 except requirement code (5.4).

Code 4999 and an "X", entered on the SRS, will specify there shall be no evidence of corrosion, physical damage, or degradation of performance.

Code 2088 and an "X", entered on the SRS, will specify the regulation shall remain within specified tolerances.

5.47 Sand and Dust (Dust)

Code 4876 is the 1006 test code (5.4).

Code 4895 is the 1006 except test code (5.4).

Code 4953 and an "X", entered on the SRS, will specify the test shall be performed in accordance with MIL-STD-810, Method 510.

Code 4955 and a value, entered on the SRS, will specify the number of cycles of operation per hour.

Code 6298 and a value, entered on the SRS, will specify the time duration of operation in minutes.

Code 6299 and a value, entered on the SRS, will specify the duration of the test in hours.

Code 1539 and an "X", entered on the SRS, will specify the orientation of the device(s) shall be changed during the test.

Code 4702 is the 1006 requirement code (5.4).

Code 4724 is the 1006 except requirement code (5.4).

To detail sand and dust test requirements, it is mandatory to use Code 4801. Code 2090 is optional.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 4801 and an "X", entered on the SRS, will specify there shall be no evidence of dust penetration.

Code 2090 and an "X", entered on the SRS, will specify the regulation shall remain within the specified tolerance.

5.48 Shock

Code 7310 is the 1006 test code (5.4).

Code 7311 is the 1006 except test code (5.4).

To detail the shock test method, Codes 7312 and 7313 are mandatory. Other codes are optional.

Code 7312 and an "X", entered on the SRS, will specify the test shall be performed in accordance with Method 516 of MIL-STD-810. When Code 7312 is used, Code 7313 is mandatory.

Code 7313 and a value, entered on the SRS, will specify the test shall be performed in accordance with MIL-STD-810, Method 516, and procedure number specified. When Code 7313 is used, Code 7312 is mandatory.

Code 7317 and an "X", entered on the SRS, will specify the shock test pulse shape shall be a sawtooth.

Code 7318 and an "X", entered on the SRS, will specify the shock test pulse shape shall be a half sine wave.

Code 7319 and a value, entered on the SRS, will specify the shock pulse peak value in gravity units (g's).

Code 7320 and a value, entered on the SRS, will specify the shock pulse duration in milliseconds.

Code 7322 and a value, entered on the SRS, will specify the minimum test temperature in degrees Celsius. When Code 7322 is used, Code 7321 is mandatory.

Code 7321 and a value, entered on the SRS, will specify the maximum test temperature in degrees Celsius. When Code 7321 is used, Code 7322 is mandatory.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 7323 and a value, entered on the SRS, will specify the minimum frequency of the filter bandwidth in hertz. When Code 7323 is used, Code 7324 is mandatory.

Code 7324 and a value, entered on the SRS, will specify the maximum frequency of the filter bandwidth in hertz. When Code 7324 is used, Code 7323 is mandatory.

Code 7314 is the 1006 requirement code (5.4).

Code 7315 is the 1006 except requirement code (5.4).

To detail shock test requirements, it is mandatory to use Code 7316. Other codes are optional.

Code 7316 and an "X", entered on the SRS, will specify there shall be no evidence of physical damage.

Code 2092 and an "X", entered on the SRS, will specify the regulation shall remain within specified tolerances.

Code 4670 and an "X", entered on the SRS, will specify there shall be no loosening of components or parts of the device(s).

5.49 Short-Circuit

Code 2095 is the 1006 test code (5.4).

Code 2096 is the 1006 except test code (5.4).

Code 2097 and a value, entered on the SRS, will specify the minimum short-circuit current in amperes. When Code 2097 is used, Code 2098 is mandatory.

Code 2098 and a value, entered on the SRS, will specify the short-circuit time duration in seconds. When Code 2098 is used, Code 2097 is mandatory.

Code 2099 and a value, entered on the SRS, will specify the number of times the short-circuit shall be applied during the test.

Code 2100 and an "X", entered on the SRS, will specify the voltage regulation shall be measured after the test.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

Code 2101 and an "X", entered on the SRS, will specify the current regulation shall be measured after the test.

Code 2105 is the 1006 requirement code (5.4).

Code 2106 is the 1006 except requirement code (5.4).

Code 2107 and an "X", entered on the SRS, will specify there shall be no evidence of damage.

Code 2108 and a value, entered on the SRS, will specify the minimum voltage regulation in percent.

Code 2109 and a value, entered on the SRS, will specify the minimum current regulation in percent.

Code 2110 and a value, entered on the SRS, will specify the maximum recovery time in seconds.

5.50 Temperature - Altitude

Code 2114 is the 1006 test code (5.4).

Code 2115 is the 1006 except test code (5.4).

To detail the temperature - altitude test method, Code 2116 is mandatory. Other codes are optional.

Code 2116 and an "X", entered on the SRS, will specify the test shall be performed in accordance with Method 504 of MIL-STD-810.

Code 2117 and a number, entered on the SRS, will specify the equipment class. The designation is obtained from the equipment classes for Temperature - Altitude Tests Table found in Method 504 of MIL-STD-810.

Code 2118 and a value, entered on the SRS, will specify the minimum input voltage in percent of the rated voltage.

Code 2119 and a value, entered on the SRS, will specify the maximum input voltage in percent of the rated voltage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 2124 is the 1006 requirement code (5.4).

Code 2125 is the 1006 except requirement code (5.4).

Code 2126 and an "X", entered on the SRS, will specify there shall be no evidence of physical damage.

Code 2127 and an "X", entered on the SRS, will specify the regulation shall remain within specified tolerances.

5.51 Temperature - High

Code 6216 is the 1006 test code (5.4).

Code 6217 is the 1006 except test code (5.4).

To detail the temperature - high test method, Codes 6218 and 6219 are mandatory. Other codes are optional.

Code 6218 and an "X", entered on the SRS, will specify the test shall be performed in accordance with Method 501 of MIL-STD-810. When Code 6218 is used, Code 6219 is mandatory.

Code 6219 and a value, entered on the SRS, will specify the test shall be performed in accordance with MIL-STD-810, Method 501, and test procedure number specified. When Code 6219 is used, Code 6218 is mandatory.

Code 6220 and a value, entered on the SRS, will specify the test storage chamber temperature in degrees Celsius.

Code 2134 and a value, entered on the SRS, will specify the test chamber temperature tolerance in plus or minus degrees Celsius.

Code 6222 and a value, entered on the SRS, will specify the maximum operating temperature in degrees Celsius.

Code 2136 and a value, entered on the SRS, will specify the operating temperature tolerance in plus or minus degrees Celsius.

Code 2137 and a value, entered on the SRS, will specify the number of operating cycles in the test.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

Code 2138 and a value, entered on the SRS, will specify the on time of the operating cycle in minutes.

Code 2139 and a value, entered on the SRS, will specify the off time of the operating cycle in minutes.

Code 2140 and a value, entered on the SRS, will specify the maximum time duration before the measurements after the test.

Code 2141 and an "X", entered on the SRS, will specify the voltage regulation shall be measured after the test.

Code 2142 and an "X", entered on the SRS, will specify the current regulation shall be measured after the test.

Code 6227 is the 1006 requirement code (5.4).

Code 6228 is the 1006 except requirement code (5.4).

Code 6229 and an "X", entered on the SRS, will specify there shall be no evidence of physical damage.

Code 2148 and an "X", entered on the SRS, will specify the regulation shall remain within specified tolerances.

Code 2149 and a value, entered on the SRS, will specify the minimum voltage regulation in percent.

Code 2150 and a value, entered on the SRS, will specify the minimum current regulation in percent.

5.52 Temperature - Low

Code 6230 is the 1006 test code (5.4).

Code 6231 is the 1006 except test code (5.4).

To detail the temperature - low test method, Code 6232 is mandatory. Other codes are optional.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 6232 and an "X", entered on the SRS, will specify the test shall be performed in accordance with Method 502 of MIL-STD-810.

Code 6234 and a value, entered on the SRS, will specify the storage temperature in degrees Celsius.

Code 2159 and a value, entered on the SRS, will specify the storage temperature tolerance in plus or minus degrees Celsius.

Code 6236 and a value, entered on the SRS, will specify the operating temperature in degrees Celsius.

Code 2161 and a value, entered on the SRS, will specify the operating temperature tolerance in plus or minus degrees Celsius.

Code 6237 and a value, entered on the SRS, will specify the air velocity within the chamber in feet per second. When Code 6237 is used with Code 6238, equivalent values must be used.

Code 6238 and a value, entered on the SRS, will specify the air velocity within the chamber in metres per second. When Code 6238 is used with Code 6237 equivalent values must be used.

Code 6235 and a value, entered on the SRS, will specify the minimum time duration for the test in hours.

Code 2165 and an "X", entered on the SRS, will specify the voltage regulation shall be performed after the test.

Code 2166 and an "X", entered on the SRS, will specify the regulation shall be performed after the test.

Code 6317 is the 1006 requirement code (5.4).

Code 6318 is the 1006 except requirement code (5.4).

Code 6319 and an "X", entered on the SRS, will specify there shall be no evidence of physical damage.

Code 2173 and an "X", entered on the SRS, will specify the regulation shall remain within specified tolerances.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

Code 2174 and a value, entered on the SRS, will specify the minimum voltage regulation in percent.

Code 2175 and a value, entered on the SRS, will specify the minimum current regulation in percent.

5.53 Temperature Rise

Code 2180 is the 1006 test code (5.4).

Code 2181 is the 1006 except test code (5.4).

Code 2182 and a value, entered on the SRS, will specify the input voltage as a percent of the rated input voltage.

Code 2183 and a value, entered on the SRS, will specify the input frequency as a percent of the rated input frequency.

Code 2184 and a value, entered on the SRS, will specify the output voltage as a percent of the rated output voltage.

Code 2185 and a value, entered on the SRS, will specify the output frequency as a percent of the rated output frequency.

Code 2186 and a value, entered on the SRS, will specify the electrical load as a percent of the rated load.

Code 2187 and a value, entered on the SRS, will specify the maximum power factor as a ratio.

Code 2188 and a value, entered on the SRS, will specify the maximum ambient temperature in degrees Celsius.

Code 2189 and a value, entered on the SRS, will specify the duration of the test in hours.

Code 2195 is the 1006 requirement code (5.4).

Code 2196 is the 1006 except requirement code (5.4).

Code 2197 and a value, entered on the SRS, will specify the maximum temperature rise for the device(s) in degrees Celsius.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

Code 2198 and a value, entered on the SRS, will specify the maximum temperature rise for any component within the device in degrees Celsius.

5.54 Temperature Shock

Code 6211 is the 1006 test code (5.4).

Code 6212 is the 1006 except test code (5.4).

To detail the temperature shock test method, Code 4710 is mandatory.

Code 4710 and an "X", entered on the SRS, will specify the test shall be performed in accordance with Method 503 of MIL-STD-810.

Code 2205 and a value, entered on the SRS, will specify the minimum temperature in degrees Celsius.

Code 2206 and a value, entered on the SRS, will specify the minimum temperature tolerance in plus or minus degrees Celsius.

Code 2207 and a value, entered on the SRS, will specify the minimum temperature test time duration in hours.

Code 2208 and a value, entered on the SRS, will specify the maximum temperature in degrees Celsius.

Code 2209 and a value, entered on the SRS, will specify the maximum temperature tolerance in plus or minus degrees Celsius.

Code 2210 and a value, entered on the SRS, will specify the maximum temperature test time duration in hours.

Code 4704 and a value, entered on the SRS, will specify the number of temparature cycles.

Code 6213 is the 1006 requirement code (5.4).

Code 6214 is the 1006 except requirement code (5.4).

Code 6215 and an "X", entered on the SRS, will specify there shall be no evidence of physical damage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 2213 and an "X", entered on the SRS, will specify the regulation shall remain within specified limits.

5.55 Transient Input

Code 2215 is the 1006 test code (5.4).

Code 2216 is the 1006 except test code (5.4).

To detail the transient input test method, Code 2217 is mandatory.

Code 2217 and an "X", entered on the SRS, will specify the test shall be performed in accordance with the Transient Input Test Table, Table VII, Section 8.

The Transient Input Test Table (Table VII) is used as follows:

Code 4500 and a value, entered on the SRS, will specify the test one input voltage in volts.

Code 4501 and a value, entered on the SRS, will specify the test one input voltage time duration in seconds.

Code 4502 and a value, entered on the SRS, will specify the number of applications of the input voltage for test one.

The remaining lines for tests two through five may be used in a similar manner.

Code 2220 is the 1006 requirement code (5.4).

Code 2221 is the 1006 except requirement code (5.4).

Code 2222 and an "X", entered on the SRS, will specify the device(s) shall recover automatically to specified performance.

Code 2223 and an "X", entered on the SRS, will specify there shall be no evidence of flashover or insulation breakdown.

Code 2224 and an "X", entered on the SRS, will specify the regulation shall remain within specified limits.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.56 Vibration

Code 1465 is the 1006 test code (5.4).

Code 1466 is the 1006 except test code (5.4).

To detail the vibration test method, Code 1467 is mandatory.

Code 1467 and an "X", entered on the SRS, will specify the test shall be performed in accordance with Method 201 of MIL-STD-202.

Code 1470 and a value, entered on the SRS, will specify the duration of applied vibration per axis in hours. This code should be used only when the required vibration per axis is other than two hours as specified in Method 201 of MIL-STD-202.

Code 1474 is the 1006 requirement code (5.4).

Code 1475 is the 1006 except requirement code (5.4).

Code 1476 and an "X", entered on the SRS, will specify there shall be no evidence of physical damage. Code 1476 is mandatory when requirements are detailed. Code 2229 is optional.

Code 2229 and an "X", entered on the SRS, will specify the regulation shall remain within specified tolerance.

5.57 Vibration (High Frequency)

Code 1445 is the 1006 test code (5.4).

Code 1446 is the 1006 except test code (5.4).

To detail a high frequency vibration test, Code 1447 is mandatory. Other codes are optional.

Code 1447 and an "X", entered on the SRS, will specify the test shall be performed in accordance with Method 204 of MIL-STD-202. When Code 1447 is used, Code 1448 is mandatory.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 4709 and an "X", entered on the SRS, will specify the method of mounting the device(s) shall be any suitable method of mounting. When Code 4709 is used, do not use Code 4708 or 4707.

Code 4708 and an "X", entered on the SRS, will specify the method of mounting the device(s) shall be the normal method of mounting. When Code 4708 is used, do not use Code 4709 or 4707.

Code 4707 and a document designation, entered on the SRS, will specify the method of mounting the device(s) shall be in accordance with the document specified. When Code 4707 is used, do not use Code 4709 or 4708.

Code 1533 and an "X", entered on the SRS, will specify the method of determining the mechanical resonance shall be visually by means of a stroboscope. When Code 1533 is used, do not use Code 1534.

Code 1534 and an "X", entered on the SRS, will specify the method of determining the mechanical resonance shall be by the electrical output indications. When Code 1534 is used, do not use Code 1533.

Code 1454 is the 1006 requirement code (5.4).

Code 1455 is the 1006 except requirement code (5.4).

Code 1456 and an "X", entered on the SRS, will specify there shall be no evidence of physical damage. Code 1456 is mandatory when requirements are detailed. Code 2232 is optional.

Code 2232 and an "X", entered on the SRS, will specify the regulation shall remain within the specified tolerance.

5.58 Vibration (Random)

Code 1425 is the 1006 test code (5.4).

Code 1426 is the 1006 except test code (5.4).

To detail the random vibration test method, Code 1427 is mandatory. Other codes are optional.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 1427 and an "X", entered on the SRS, will specify the test shall be performed in accordance with Method 214 of MIL-STD-202. When Code 1427 is used, Code 1428 is mandatory.

Code 1428 and a number and letter, entered on the SRS, will specify the test shall be performed in accordance with MIL-STD-202, Method 214 and test condition number and letter specified. When Code 1428 is used, Code 1427 and either Code 1431 or 1438 is mandatory.

Code 1431 and a value, entered on the SRS, will specify the time duration of applied random vibration shall be the value specified in hours. When Code 1431 is used, do not use Code 1438.

Code 1438 and a value, entered on the SRS, will specify the time duration of applied random vibration shall be the value specified in minutes. When Code 1438 is used, do not use Code 1431.

Code 1452 and an "X", entered on the SRS, will specify the monitoring instrumentation of the vibration excitation shall be any suitable instrumentation system. When Code 1452 is used, do not use Code 1453 or 1459.

Code 1453 and an "X", entered on the SRS, will specify the monitoring instrumentation of the vibration excitation shall be a calibrated ac to dc converter and strip chart recorder. When Code 1453 is used, do not use Code 1452 or 1459.

Code 1459 and an "X", entered on the SRS, will specify the monitoring instrumentation of the vibration excitation shall be a calibrated oscilloscope. When Code 1459 is used, do not use Code 1452 or 1453.

Code 1430 and a value, entered on the SRS, will specify the number of monitoring points.

Code 1439 and an "X", entered on the SRS, will specify the location of the vibration monitoring points shall be any suitable location. When Code 1439 is used, do not use Code 1462.

Code 1462 and an "X", entered on the SRS, will specify the location of the vibration monitoring points shall be as close as practical to the device(s). When Code 1462 is used, do not use Code 1439.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 4977 and an "X", entered on the SRS, will specify the method of mounting the device(s) shall be any suitable method of mounting. When Code 4977 is used, do not use Code 4976 or 4975.

Code 4976 and an "X", entered on the SRS, will specify the method of mounting shall be the normal method of mounting. When Code 4976 is used, do not use Code 4977 or 4975.

Code 4975 and a document designation, entered on the SRS, will specify the method of mounting shall be in accordance with the document specified. When Code 4975 is used, do not use Code 4977 or 4976.

Code 1434 is the 1006 requirement code (5.4).

Code 1435 is the 1006 except requirement code (5.4).

Code 1436 and an "X", entered on the SRS, will specify there shall be no evidence of physical damage.

Code 2235 and an "X", entered on the SRS, will specify the regulation shall remain within specified limits.

5.59 Voltage Regulation, Line

Code 2240 is the 1006 test code (5.4).

Code 2241 is the 1006 except test code (5.4).

To detail the voltage regulation test method, Code 2242 is mandatory. Other codes are optional.

Code 2242 and an "X", entered on the SRS, will specify the test shall be performed in accordance with MIL-R-55223.

Code 2243 and a value, entered on the SRS, will specify the minimum input voltage as a percent of the rated voltage.

Code 2244 and a value, entered on the SRS, will specify the maximum input voltage as a percent of the rated voltage.

Code 2245 and a value, entered on the SRS, will specify the electrical load in ohms.

Code 2246 and a value, entered on the SRS, will specify the minimum operating duration in seconds.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

Code 2250 is the 1006 requirement code (5.4).

Code 2251 is the 1006 except requirement code (5.4).

Code 2252 and a value, entered on the SRS, will specify the minimum output voltage in volts. When Code 2252 is used, Code 2253 is mandatory.

Code 2253 and a value, entered on the SRS, will specify the maximum output voltage in volts. When Code 2253 is used, Code 2252 is mandatory.

Code 2254 and a value, entered on the SRS, will specify the minimum output frequency in hertz. When Code 2254 is used, Code 2255 is mandatory.

Code 2255 and a value, entered on the SRS, will specify the maximum output frequency in hertz. When Code 2255 is used, Code 2254 is mandatory.

Code 2256 and a value, entered on the SRS, will specify the minimum regulation in percent.

Code 2257 and a value, entered on the SRS, will specify the minimum correction rate in volts per second.

5.60 Voltage Regulation, Load

Code 2260 is the 1006 test code (5.4).

Code 2261 is the 1006 except test code (5.4).

To detail the voltage regulation test method, Code 2262 is mandatory. Other codes are optional.

Code 2262 and an "X", entered on the SRS, will specify the test shall be performed in accordance with MIL-R-55223.

Code 2263 and a value, entered on the SRS, will specify the minimum input voltage as a percent of the rated voltage.

Code 2264 and a value, entered on the SRS, will specify the maximum input voltage as a percent of the rated voltage.

Code 2265 and a value, entered on the SRS, will specify the minimum test temperature in degrees Celsius.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 2266 and a value, entered on the SRS, will specify the maximum test temperature in degrees Celsius.

Code 2267 and a value, entered on the SRS, will specify the minimum input frequency in hertz.

Code 2268 and a value, entered on the SRS, will specify the maximum input frequency in hertz.

Code 2269 and a value, entered on the SRS, will specify the number of load steps in the test. When Code 2269 is used, Code 2270 is mandatory.

Code 2270 and a value, entered on the SRS, will specify the electrical load per step as a percent of the rated load. When Code 2270 is used, Code 2269 is mandatory.

Code 2275 is the 1006 requirement code (5.4).

Code 2276 is the 1006 except requirement code (5.4).

Code 2277 and a value, entered on the SRS, will specify the minimum voltage regulation in percent.

Code 2278 and a value, entered on the SRS, will specify the minimum voltage regulation at any load step in percent.

Code 2279 and a value, entered on the SRS, will specify the minimum correction rate in volts per second.

5.61 Wave Form

Code 2285 is the 1006 test code (5.4).

Code 2286 is the 1006 except test code (5.4).

Code 2287 and a value, entered on the SRS, will specify the minimum input voltage as a percent of the rated voltage.

Code 2288 and a value, entered on the SRS, will specify the maximum input voltage as a percent of the rated voltage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Code 2289 and a value, entered on the SRS, will specify the number of load steps in the test. When Code 2289 is used, Code 2290 is mandatory.

Code 2290 and a value, entered on the SRS, will specify the electrical load per step as a percent of the rated load. When Code 2290 is used, Code 2289 is mandatory.

Code 2291 and a value, entered on the SRS, will specify the minimum lagging power factor as a ratio.

Code 2295 is the 1006 requirement code (5.4).

Code 2296 is the 1006 except requirement code (5.4).

Code 2297 and a value, entered on the SRS, will specify the maximum crest factor in percent of the total wave form amplitude at any load step.

Code 2298 and a value, entered on the SRS, will specify the maximum amplitude of any harmonic as a percent of the amplitude of the fundamental frequency at any load step.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
1.3	Enter on the SRS, requirements from MIL-STD-35	
5.9	Design and Construction	
5.9.1	*Type Regulation (Select one)	
	Continuous.	1563
	Step.	1564
5.9.2	*Construction	
	Open.	1566
	Enclosed.	1567
	Enclosed, ventilated.	1568
	Hermetically sealed.	1569
	Encapsulated.	1570
	Printed circuit board.	1571
5.9.3	Classification (Select one)	
	Grade A.	1572
	Grade B.	1573

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.9.3 (Cont)	Classification (Cont)	
	Type I.	1574
	Type II.	1575
	Type III.	1576
	Unit 1.	1577
	Unit 2.	1578
	Unit 3.	1579
5.9.4	Maximum Weight	
	(oz)	2300
	(lb)	2301
	(g)	2302
	(kg)	2303
5.9.5	Input(s)	Table I
5.9.6	Output(s)	Table II

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.10	Output Voltage Adjustment	
	Remote.	1581
	Programmable.	1582
	Minimum voltage (V)	1583
	Maximum voltage (V)	1584
	Voltage increments (V)	1585
5.11	Control Voltage	
	Minimum Temperature (deg C)	1587
	Minimum Voltage (V)	1588
	Maximum Voltage (V)	1589
	Maximum Temperature (deg C)	1590
	Minimum Voltage (V)	1591
	Maximum Voltage (V)	1592

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.12	Altitude Range	
	Operating condition	
	Sea level to (ft)	5060
	Sea level to (m)	5061
	Nonoperating condition	
	Sea level to (ft)	5062
	Sea level to (m)	5063
5.13	Design Reliability Rating	
	*Failure rate (pct/1000 hr)	7025
	*Confidence level (pct)	7026
	*Electrical stress (Select one)	
	Voltage (pct of rated V)	7030
	Power (pct of rated W)	7028
	*Test temperature (deg C)	7029

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.14	Temperature	
	Operating	
	Minimum temperature (deg C)	5068
	Maximum temperature (deg C)	5069
	Nonoperating	
	Minimum temperature (deg C)	5070
	Maximum temperature (deg C)	5071
5.15	Acceleration	
	(Select one test method)	
	Test per 1006 document.	6249
	Test per 1006 document except ____	6250
	Test per MIL-STD-810, Method 513.	6252
	*A level (g).	6275
	*Vehicle category. (Select one)	
	Airplane.	6240
	Helicopter.	6241
	Manned aerospace vehicle.	6242

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.15 (Cont)	Acceleration (Cont)	
	Air launched missile.	6243
	Ground launched missile.	6244
	Procedure Number (Roman numeral)	6256
	Test duration (min)	6259
	(Select one requirement)	
	Requirement(s) per 1006 document.	6271
	Requirement(s) per 1006 document except ____	6272
	Requirement(s) as follows:	
	*No evidence of physical damage.	6273
	The regulator shall remain within specified tolerance.	1594
	Minimum regulation (pct)	1595
5.16	Acoustical Noise	
	(Select one test method)	
	Test per 1006 document.	1600
	Test per 1006 document except _____	1601
	Test per MIL-STD-810, Method 515, Procedure I	
	*Test category (des)	1603
	Operate during test.	1605

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.16 (Cont)	Acoustical Noise (Cont)	
	Device(s) monitored via (Select one)	
	Hardline.	1607
	Telemetry.	1608
	(Select one requirement)	
	Requirement(s) per 1006 document.	1610
	Requirement(s) per 1006 document except ____	1611
	Requirement(s) as follows:	
	Maximum ripple (Vrms)	1613
	Maximum noise (Vrms)	1615
5.17	Altitude	
	(Select one test method)	
	Test per 1006 document.	1618
	Test per 1006 document except ___	1619
	Test per MIL-STD-810, Method 500	1621

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.17 (Cont)	Altitude (Cont)	
	Altitude	
	(ft)	1625
	(m)	1627
	Pressure	
	(kPa)	1629
	(torr)	1630
	Maximum rate of pressure change	
	(kPa/s)	1632
	(torr/s)	1633
	(Select one requirement)	
	Requirement(s) per 1006 document.	1635
	Requirement(s) per 1006 document except ____	1636
	Requirement(s) as follows:	
	*No erratic operation or malfunction.	1638
	Regulation shall remain within specified tolerance.	1639

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.18	Closing Voltage	
	(Select one test method)	
	Test per 1006 document.	1642
	Test per 1006 document except _____	1643
	Test per MIL-R-10265.	1645
	(Select one requirement)	
	Requirement(s) per 1006 document.	1648
	Requirement(s) per 1006 document except ____	1649
	Requirement(s) as follows:	
	Closing Voltage (V)	1651
	Tolerance ± (V)	1652
5.19	Control Signal	
	(Select one test method)	
	Test per 1006 document.	1670
	Test per 1006 document except _____	1671
	Test per MIL-R-82515.	1672

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.19 (Cont)	Control Signal (Cont)	
	Control voltage output load (ohms)	1673
	Terminal(s) + (des)	1666
	Terminal(s) - (des)	1667
	Input voltage per Table III	1668
	(Select one requirement)	
	Requirement(s) per 1006 document.	1675
	Requirement(s) per 1006 document except ____	1676
	Requirement(s) as follows:	
	Control voltage output	Table III
5.20	Current Regulation	
	(Select one test method)	
	Test per 1006 document.	1680
	Test per 1006 document except ____	1681
	Test as follows:	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.20 (Cont)	Current Regulation (Cont)	
	Minimum input voltage (pct)	1682
	Maximum input voltage (pct)	1683
	Minimum temperature (deg C)	1684
	Maximum temperature (deg C)	1685
	Minimum input frequency (Hz)	1686
	Maximum input frequency (Hz)	1687
	Load steps (no.)	1688
	*Load/step (pct)	1689
	(Select one requirement)	
	Requirement(s) per 1006 document.	1691
	Requirement(s) per 1006 document except ___	1692
	Requirement(s) as follows:	
	Maximum recovery time between any load step (ms)	1694
	Minimum current regulation for any load step (pct)	1696

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.21	Dielectric Withstanding Voltage at Reduced Barometric Pressure	
	(Select one test method)	
	Test per 1006 document.	4883
	Test per 1006 document except ____	4884
	Test per MIL-STD-202, Method 301.	6300
	*Altitude per Method 105 of MIL-STD-202	
	Test condition (letter)	4886
	*Test voltage (Select one)	
	(Vdc)	4885
	(Vac)	4849
	Point of voltage application	
	Between insulated parts and ground.	6293
	Between current carrying parts and case.	6294
	Between mutuallay insulated parts.	6292

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.21 (Cont)	Dielectric Withstanding Voltage at Reduced Barometric Pressure (Cont)	
	Special preparation in accordance with (doc des., 5.7)	4859
	Duration of voltage application (s)	4891
	Mounting shall be in accordance with (doc des., 5.7)	6280
	(Select one requirement)	
	Requirement(s) per 1006 document.	4907
	Requirement(s) per 1006 document except ___.	4908
	Requirement(s) as follows:	
	*No evidence of flashover, mechanical damage, arcing, or insulation breakdown.	4906
	Maximum leakage (mA)	4894
5.22	Dielectric Withstanding Voltage at Sea Level	
	(Select one test method)	
	Test per 1006 document.	4860
	Test per 1006 document except ____	4861
	Test per Table IV.	Table V
	Test per MIL-STD-202, Method 301.	4862

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.22 (Cont)	Dielectric Withstanding Voltage at Sea Level (Cont)	
	Regulation (pct)	4869
	Duration (Select one)	
	(s)	4867
	(min)	4851
	Maximum surge current (Select one)	
	(mA)	4897
	(A)	4717
	Points of application of test voltage between (Select one)	
	Mutually insulated parts.	4844
	Insulated parts and ground.	4845
	Current carrying parts and case.	4846
	Mount in accordance with (doc des, 5.7)	5000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.22 (Cont)	Dielectric Withstanding Voltage at Sea Level (Cont)	
	(Select one requirement)	
	Requirement(s) per 1006 document.	4873
	Requirement(s) per 1006 document except ____	4874
	Requirement(s) as follows:	
	*No evidence of flashover, mechanical damage, arcing, or insulation breakdown.	4856
	Maximum leakage current (Select one)	
	(mA)	4875
	(microA)	4817
5.23	Efficiency	
	(Select one test method)	
	Test per 1006 document.	1700
	Test per 1006 document except ___	1701
	Test as follows:	
	Electrical load (ohms)	1703
	Power factor (no.)	1704

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.23 (Cont)	Efficiency (Cont)	
	Input voltage (Vdc)	1705
	Input voltage (Vac)	1706
	Tolerance ± (V)	1707
	Regulated voltage output (V)	1708
	(Select one requirement)	
	Requirement(s) per 1006 document.	1710
	Requirement(s) per 1006 document except ___	1711
	Requirement(s) as follows:	
	Minimum efficiency (pct)	1714
5.24	Electrical Shock	
	(Select one test method)	
	Test per 1006 document.	1717
	Test per 1006 document except _____	1718
	Test as follows:	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.24 (Cont)	Electrical Shock (Cont)	
	Input voltage 1 (pct)	1720
	Input voltage 2 (pct)	1721
	Input voltage 3 (pct)	1722
	Test temperature (deg C)	1724
	Tolerance ± (deg C)	1725
	On duration (s)	1726
	Off duration (s)	1727
	Test cycles (quantity)	1728
	(Select one requirement)	
	Requirement(s) per 1006 document.	1730
	Requirement(s) per 1006 document except ___	1731
	Requirement(s) as follows:	
	*No evidence of electrical or mechanical damage.	1732
	Output current (A)	1733
	Minimum output voltage (V)	1734
	Maximum output voltage (V)	1735

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.25	Emergency Power Source	
	(Select one test method)	
	Test per 1006 document.	1740
	Test per 1006 document except _____	1741
	Test as follows:	
	Battery (type)	1742
	Number of battery(s) (quantity)	1743
	(Select one requirement)	
	Requirement(s) per 1006 document.	1750
	Requirement(s) per 1006 document except ____	1751
	Requirement(s) as follows:	
	Output voltage (V)	1752
	Tolerance ± (V)	1753

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.26	Endurance	
	(Select one test method)	
	Test per 1006 document.	1760
	Test per 1006 document except ___	1761
	Test as follows:	
	Test duration (hrs)	1762
	Load (pct)	1763
	On/off interval (s)	1764
	Maximum measurement interval (hrs)	1765
	(Select one requirement)	
	Requirement(s) per 1006 document.	1770
	Requirement(s) per 1006 document except ___	1771
	Requirement(s) as follows:	
	Maximum output drift	
	Voltage (pct)	1772
	Frequency (pct)	1773

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.26 (Cont)	Endurance (Cont)	
	No part of device shall show excessive wear.	1774
	Minimum regulation (pct)	1775
5.27	Explosion	
	(Select one test method)	
	Test per 1006 document.	1780
	Test per 1006 document except ____	1781
	Test per MIL-STD-810, Method 511	
	*Procedure (number)	1782
	Chamber temperature (deg C)	1783
	*Tolerance ± (deg C)	1784
	Load (pct)	1785
	(Select one requirement)	
	Requirement(s) per 1006 document.	1790
	Requirement(s) per 1006 document except ___	1791

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.27 (Cont)	Explosion (Cont)	
	Requirement(s) as follows:	
	No evidence of explosion or violent burning.	1792
5.28	Flammability	
	(Select one test method)	
	Test per 1006 document.	1800
	Test per 1006 document except ____	1801
	Test per MIL-STD-202, Method 111.	1802
	Direction of axis of flame	
	(Select one)	
	Any suitable direction.	1803
	Horizontal.	1804
	Direction in accordance with (doc des, 5.7)	1805
	Point of impingement of flame	
	(Select one)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.28 (Cont)	Flammability (Cont)	
	Any suitable point.	1806
	Point in accordance with (doc des, 5.7)	1807
	Minimum duration of flame application (s)	1808
	(Select one requirement)	
	Requirement(s) per 1006 document.	1810
	Requirement(s) per 1006 document except ____.	1811
	Requirement(s) as follows:	
	*No explosive type fire.	1812
	No dripping of flammable material.	1813
	Maximum burning time (s)	1814
	Regulation shall remain with specified limits.	1815
5.29	Frequency Regulation	
	(Select one test method)	
	Test per 1006 document.	1820
	Test per 1006 document except ____	1821
	Test as follows:	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.29 (Cont)	Frequency Regulation (Cont)	
	Ambient temperature	
	Minimum (deg C)	1822
	Maximum (deg C)	1823
	Tolerance ± (deg C)	1824
	Measurement interval (min)	1825
	Power factor (Select one)	
	Minimum lagging (no.)	1826
	Minimum leading (no.)	1827
	Maximum altitude	
	(ft)	1828
	(m)	1829
	Device position	
	Rotating increments from normal (deg)	1830
	Input, rated voltage	
	Minimum (pct)	1831
	Maximum (pct)	1832

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.29 (Cont)	Frequency Regulation (Cont)	
	Minimum load (ohms)	1833
	Maximum load (ohms)	1834
	(Select one requirement)	
	Requirement(s) per 1006 document.	1840
	Requirement(s) per 1006 document except ____	1841
	Requirement(s) as follows:	
	Maximum frequency deviation ± (Hz)	1842
	Frequency/V ratio	
	Minimum (no.)	1843
	Maximum (no.)	1844
5.30	Fungus	
	(Select one test method)	
	Test per 1006 document.	4753
	Test per 1006 document except ____	4754
	Test per MIL-STD-810, Method 508.	4755

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.30 (Cont)	Fungus (Cont)	
	Test period if other than 28 (days)	4756
	Device(s) operated during test.	4763
	(Select one requirement)	
	Requirement(s) per 1006 document.	4759
	Requirement(s) per 1006 document except ____	4760
	Requirement(s) as follows (select one)	
	Fungus resistant by certification.	4761
	Fungus resistant by test.	4762
5.31	Humidity	
	(Select one test method)	
	Test per 1006 document.	4787
	Test per 1006 document except ____	4788
	Test per MIL-STD-810, Method 507.	4871
	*Procedure (no.)	4767
	Device(s) exposed to extreme temperature prior to test.	4796

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.31 (Cont)	Humidity (Cont)	
	Maximum temperature (deg C)	4777
	*Duration (hrs)	4778
	Test cycles (quantity)	4800
	Duration of test (hrs)	4816
	(Select one requirement)	
	Requirement(s) per 1006 document.	4797
	Requirement(s) per 1006 document except ____	4798
	Requirement(s) as follows:	
	*No evidence of corrosion or physical damage.	4799
	Regulation shall remain within specified tolerances.	1865
5.32	Insulation Resistance	
	(Select one test method)	
	Test per 1006 document.	1370
	Test per 1006 document except ____	1371
	Test per MIL-STD-202, Method 302	1511

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.32 (Cont)	Insulation Resistance (Cont)	
	Test condition (letter)	1378
	Test voltage (Vdc)	1373
	Electrification duration (s)	1376
	Maximum measurement error (pct)	1377
	Temperature (deg C)	2132
	*Tolerance ± (deg C)	1383
	Test terminals (no.)	2133
	(Select one requirement)	
	Requirement(s) per 1006 document.	1379
	Requirement(s) per 1006 document except ____	1380
	Requirement(s) as follows:	
	*No evidence of physical damage.	1407
	Minimum insulation resistance (megohms)	1386

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.33	Leakage (Immersion)	
	(Select one test method)	
	Test per 1006 document.	1866
	Test per 1006 document except ____	1867
	Test per MIL-STD-810, Method 512.	1868
	*Procedure (number).	1869
	Device(s) condition for test (Select one)	
	Transit.	1870
	Operational.	1871
	Duration between final cycle and measurements (hrs)	1874
	(Select one requirement)	
	Requirement(s) per 1006 document.	1878
	Requirement(s) per 1006 document except ____	1879

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.33 (Cont)	Leakage (Immersion) (Cont)	
	Requirement(s) as follows:	
	No evidence of physical damage.	1863
	No evidence of moisture penetration.	1864
	Regulation shall remain within specified tolerances.	1873
5.34	Opening Current	
	(Select one test method)	
	Test per 1006 document.	1875
	Test per 1006 document except _____	1876
	Test per MIL-R-10265.	1877
	(Select one requirement)	
	Requirement(s) per 1006 document.	1880
	Requirement(s) per 1006 document except ____	1881
	Requirement(s) as follows:	
	Minimum opening current (pct)	1882
	Maximum opening current (pct)	1883

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.35	Operating Position	
	(Select one test method)	
	Test per 1006 document.	1890
	Test per 1006 document except ____	1891
	Test per (doc des, 5.7)	1892
	Any position operation verified during other tests.	1893
	Rotation increments (deg)	1894
	*Total rotation (deg)	1895
	Rotate from normal horizontal position	
	Each major axis.	1897
	Except axis (ident)	1898
	(Select one requirement)	
	Requirement(s) per 1006 document.	1900
	Requirement(s) per 1006 document except ___	1901

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.35 (Cont)	Operating Position (Cont)	
	Requirement(s) as follows:	
	No evidence of physical damage or degradation.	1902
	Minimum regulation in any position (pct)	1903
5.36	Output Current	
	(Select one test method)	
	Test per 1006 document.	1910
	Test per 1006 document except____	1911
	Test as follows:	
	Minimum input voltage (V)	1912
	Maximum input voltage (V)	1913
	Voltage applied to battery terminals (V)	1914
	Tolerance ± (V)	1915
	Load resistance (ohms)	1916
	Tolerance ± (ohms)	1917

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.36 (Cont)	Output Current (Cont)	
	(Select one requirement)	
	Requirement(s) per 1006 document.	1920
	Requirement(s) per 1006 document except ____	1921
	Requirement(s) as follows:	
	Minimum output current (A)	1922
5.37	Output Impedance	
	(Select one test method)	
	Test per 1006 document.	1925
	Test per 1006 document except ____	1926
	Test as follows:	
	Test 1: Input voltage (V)	1927
	Tolerance ± (V)	1928
	Input frequency (Hz)	1929
	Tolerance ± (Hz)	1930

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.37 (Cont)	Output Impedance (Cont)	
	Test 2: Input Voltage (V)	1931
	Tolerance ± (V)	1932
	Input frequency (Hz)	1933
	Tolerance ± (Hz)	1934
	Test 3: Input voltage (V)	1935
	Tolerance ± (V)	1936
	Input frequency (Hz)	1937
	Tolerance ± (Hz)	1938
	Load (ohms)	1939
	Tolerance ± (ohms)	1940
	(Select one requirement)	
	Requirement(s) per 1006 document.	1945
	Requirement(s) per 1006 document except ____	1946

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.37 (Cont)	Output Impedance (Cont)	
	Requirement(s) as follows:	
	Test 1: Minimum output voltage (V)	1947
	Maximum output voltage (V)	1948
	Maximum output impedance (ohms)	1949
	Test 2: Minimum output voltage (V)	1950
	Maximum output voltage (V)	1951
	Maximum output impedance (ohms)	1952
	Test 3: Minimum output voltage (V)	1953
	Maximum output voltage (V)	1954
	Maximum output impedance (ohms)	1955
5.38	Output Voltage Adjust	
	(Select one test method)	
	Test per 1006 document.	1960
	Test per 1006 document except _____	1961
	Test per Table V.	Table V

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.38 (Cont)	Output Voltage Adjust (Cont)	
	(Select one requirement)	
	Requirement(s) per 1006 document.	1965
	Requirement(s) per 1006 document except ____	1966
	Requirement(s) as follows:	
	Requirements in accordance with Table V.	1967
5.39	Overvoltage Protection	
	(Select one test method)	
	Test per 1006 document.	1970
	Test per 1006 document except _____	1971
	Test as follows:	
	Maximum input voltage (V)	1972
	Maximum output voltage (V)	1973
	Maximum output current (A)	1974

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.39 (Cont)	Overvoltage Protection (Cont)	
	(Select one requirement)	
	Requirement(s) per 1006 document.	1980
	Requirement(s) per 1006 document except ___	1981
	Requirement(s) as follows:	
	Output must drop to zero when maximum input is reached.	1982
	Output must recover automatically when input is decreased.	1983
	Output must recover manually when input is decreased.	1984
5.40	Parallel Operation	
	(Select one test method)	
	Test per 1006 document.	1990
	Test per 1006 document except ___	1991
	Test as follows:	
	Steps (no.)	1992
	*Load/step (pct)	1993

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.40 (Cont)	Parallel Operation (Cont)	
	Devices in parallel (no.)	1994
	(Select one requirement)	
	Requirement(s) per 1006 document.	1996
	Requirement(s) per 1006 document except ____	1997
	Requirement(s) as follows:	
	Maximum load share difference (pct)	1998
	Maximum equalizing resistance (ohms)	1999
	Maximum voltage decrease (V)	2000
	Maximum equalizer terminal current (A)	2001
	Minimum regulation for any step (pct)	2002
5.41	Polarity	
	(Select one test method)	
	Test per 1006 document.	2005
	Test per 1006 document except ____	2006

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.41 (Cont)	Polarity (Cont)	
	Test as follows:	
	Input voltage	
	Positive terminal (des)	2008
	*Negative terminal (des)	2009
	*Ground terminal (des)	2010
	Reverse input	
	Positive terminal (des)	2011
	*Negative terminal (des)	2012
	(Select one requirement)	
	Requirement(s) per 1006 document.	2015
	Requirement(s) per 1006 document except ___	2016
	Requirement(s) as follows:	
	Output voltage	
	Positive (term ident)	2019
	*Negative (term ident)	2020
	*Ground (term ident)	2021

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.41 (Cont)	Polarity (Cont)	
	No evidence of damage and correct output voltage polarity is maintained when input polarity is reversed.	2022
5.42	Radio Interference	
	(Select one test method)	
	Test per 1006 document.	2025
	Test per 1006 document except ____	2026
	Test per MIL-STD-462.	2007
	Load steps (no.)	2027
	*Load/step (pct)	2028
	Equipment class (no.)	2031
	Measurements	
	Conducted radio interference.	2029
	Radiated radio interference.	2030

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.42 (Cont)	Radio Interference (Cont)	
	(Select one requirement)	
	Requirement(s) per 1006 document.	2035
	Requirement(s) per 1006 document except ___	2036
	Requirement(s) as follows:	
	Requirements per MIL-STD-461.	2037
	No adverse interference to adjacent equipment.	2038
5.43	Recovery Time	
	(Select one test method)	
	Test per 1006 document.	2050
	Test per 1006 document except ____	2051
	Test per Table VI.	Table VI
	(Select one requirement)	
	Requirement(s) per 1006 document.	2055
	Requirement(s) per 1006 document except ____	2056

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.43 (Cont)	Recovery Time (Cont)	
	Requirement(s) as follows:	
	No sustained oscillations.	2057
	Maximum oscillations above ripple level (no.)	2058
	Voltage transients per MIL-STD-704 Figure (no.)	2059
	Requirements per Table VI.	2060
5.44	Reliability Screeing (Burn-in, Aging, Conditioning, Stabilization	
	(Select one test method)	
	Test per 1006 document.	6695
	Test per 1006 document except ___	6696
	Test per MIL-STD-202, Method 108.	6697
	*Duration (Select one)	
	Test condition letter.	6698
	(hr)	6699
	Power applied (X-rated power)	6921

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.44 (Cont)	Reliability Screening (Burn-in, Aging, Conditioning, Stabilization (Cont)	
	Maximum voltage (V)	6939
	*Duty cycle (Select one)	
	1.5 hours on and 0.5 hour off.	6710
	Steady state.	6713
	*Test temperature (deg C)	6700
	*Tolerance ± (deg C)	6701
	Still air required.	6923
	Test potential (select one)	
	(Vac)	6706
	(Vdc)	6707
	Electrical load (ohm)	6920
	Measurement intervals (hr)	6922
	Mount in accordance with (doc des, 5.7)	6924
	(Select one requirement)	
	Requirement(s) per 1006 document.	6928
	Requirement(s) per 1006 document except ___	6929

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.44 (Cont)	Reliability Screening (Burn-in, Aging, Conditioning, Stabilization (Cont)	
	Requirement(s) as follows:	
	*No evidence of physical damage.	6930
	Remain within specified tolerance.	6937
	Regulation shall remain with specified limits.	2065
5.45	Ripple Voltage	
	(Select one test method)	
	Test per 1006 document.	2070
	Test per 1006 document except ____	2071
	Test as follows:	
	Load steps (no.)	2072
	*Load/step (pct)	2073
	Minimum temperature (deg C)	2074
	(Select one requirement)	
	Requirement(s) per 1006 document.	2080
	Requirement(s) per 1006 document except _____	2081

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.45 (Cont)	Ripple Voltage (Cont)	
	Requirement(s) as follows:	
	Maximum ripple voltage peak for any load step (V)	2082
	Requirements per MIL-STD-704.	2083
5.46	Salt Fog	
	(Select one test method)	
	Test per 1006 document.	4776
	Test per 1006 document except ____	4779
	Test per MIL-STD-810, Method 509.	4780
	Test as follows:	
	Salt solution (pct)	4786
	Method of mounting (Select one)	
	Any suitable mounting method.	4766
	Normal mounting method.	4765
	Mount in accordance with (doc des, 5.7)	4773
	Exposure duration (hrs)	4783
	Drying duration (hrs)	4775

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.46 (Cont)	Salt Fog (Cont)	
	(Select one requirement)	
	Requirement(s) per 1006 document.	4997
	Requirement(s) per 1006 document except ____	4998
	Requirement(s) as follows:	
	*No evidence of corrosion, physical damage or degradation.	4999
	Regulation shall remain with specified tolerance.	2088
5.47	Sand and Dust (Dust)	
	(Select one test method)	
	Test per 1006 document.	4876
	Test per 1006 document except ____	4895
	Test per MIL-STD-810, Method 510.	4953
	Cycles of operation per hour (no.)	4955
	Duration of operation (min)	6298
	Duration of operation (hrs)	6299
	Orientation changed during test.	1539

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.47 (Cont)	Sand and Dust (Dust) (Cont)	
	(Select one requirement)	
	Requirement(s) per 1006 document.	4702
	Requirement(s) per 1006 document except ____	4724
	Requirement(s) as follows:	
	*No evidence of dust penetration.	4801
	Regulation shall remain within specified tolerance.	2090
5.48	Shock	
	(Select one test method)	
	Test per 1006 document.	7310
	Test per 1006 document except ____	7311
	Test per MIL-STD-810, Method 516.	7312
	*Procedure (number)	7313
	Shock pulse shape	
	Sawtooth.	7317
	Half sinewave.	7318

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.48 (Cont)	Shock (Cont)	
	Pulse peak value (g)	7319
	Pulse duration (ms)	7320
	Minimum temperature (deg C)	7322
	*Maximum temperature (deg C)	7321
	Filter bandwidth	
	Minimum frequency (Hz)	7323
	*Maximum frequency (Hz)	7324
	(Select one requirement)	
	Requirement(s) per 1006 document.	7314
	Requirement(s) per 1006 document except ____	7315
	Requirement(s) as follows:	
	*No evidence of physical damage.	7316
	Regulation shall remain within specified tolerance.	2092
	No loosening of components.	4670

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.49	Short-Circuit	
	(Select one test method)	
	Test per 1006 document.	2095
	Test per 1006 document except ____	2096
	Test as follows:	
	Minimum current (A)	2097
	*Duration (s)	2098
	Times short circuit applied (no.)	2099
	Measurements after test	
	Voltage regulation.	2100
	Current regulation.	2101
	(Select one requirement)	
	Requirement(s) per 1006 document.	2105
	Requirement(s) per 1006 document except ___	2106
	Requirement(s) as follows:	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.49 (Cont)	Short-Circuit (Cont)	
	No evidence of damage.	2107
	Minimum voltage regulation (pct)	2108
	Minimum current regulation (pct)	2109
	Maximum recovery time (s)	2110
5.50	Temperature - Altitude	
	(Select one test method)	
	Test per 1006 document.	2114
	Test per 1006 document except ___	2115
	Test per MIL-STD-810, Method 504.	2116
	*Equipment class (des)	2117
	Minimum input voltage (pct)	2118
	Maximum input voltage (pct)	2119
	(Select one requirement)	
	Requirement(s) per 1006 document.	2124
	Requirement(s) per 1006 document except ___	2125

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.50 (Cont)	Temperature - Altitude (Cont)	
	Requirement(s) as follows:	
	No evidence of physical damage.	2126
	Regulation shall remain within specified tolerances.	2127
5.51	Temperature - High	
	(Select one test method)	
	Test per 1006 document.	6216
	Test per 1006 document except ____	6217
	Test per MIL-STD-810, Method 501.	6218
	*Procedure (number).	6219
	Storage temperature (deg C)	6220
	Tolerance ± (deg C)	2134
	Maximum operating temperature (deg C)	6222
	Tolerance ± (deg C)	2136
	Operating cycles (no.)	2137
	On time (min)	2138

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.51 (Cont)	Temperature - High (Cont)	
	Off time (min)	2139
	Maximum time before measurements after test (min)	2140
	Measurements after test	
	Voltage regulation.	2141
	Current regulation.	2142
	(Select one requirement)	
	Requirement(s) per 1006 document.	6227
	Requirement(s) per 1006 document except ____	6228
	Requirement(s) as follows:	
	*No evidence of physical damage.	6229
	Regulation shall remain with specified tolerances.	2148
	Minimum voltage regulation (pct)	2149
	Minimum current regulation (pct)	2150

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.52	Temperature - Low	
	(Select one test method)	
	Test per 1006 document.	6230
	Test per 1006 document except ____	6231
	Test per MIL-STD-810, Method 502.	6232
	Storage temperature (deg C)	6234
	Tolerance ± (deg C)	2159
	Lowest operating temperature (deg C)	6236
	Tolerance ± (deg C)	2161
	Chamber air velocity (ft/sec)	6237
	Chamber air velocity (m/sec)	6238
	Minimum storage duration (hrs)	6235
	Measurements after test	
	Voltage regulation.	2165
	Current regulation.	2166

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.52 (Cont)	Temperature - Low (Cont)	
	(Select one requirement)	
	Requirement(s) per 1006 document.	6317
	Requirement(s) per 1006 document except ____	6318
	Requirement(s) as follows:	
	*No evidence of physical damage.	6319
	Regulation shall remain within specified tolerances.	2173
	Minimum voltage regulation (pct)	2174
	Minimum current regulation (pct)	2175
5.53	Temperature Rise	
	(Select one test method)	
	Test per 1006 document.	2180
	Test per 1006 document except ___	2181
	Test as follows:	
	Input voltage (pct)	2182
	Input frequency (pct)	2183

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.53 (Cont)	Temperature Rise (Cont)	
	Output voltage (pct)	2184
	Output frequency (pct)	2185
	Electrical load (pct)	2186
	Maximum power factor (no.)	2187
	Maximum ambient temperature (deg C)	2188
	Duration of test (hrs)	2189
	(Select one requirement)	
	Requirement(s) per 1006 document	2195
	Requirement(s) per 1006 document except ____	2196
	Requirement(s) as follows:	
	Maximum temperature rise for device(s) (deg C)	2197
	Maximum temperature rise for any component (deg C)	2198

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.54	Temperature Shock	
	(Select one test method)	
	Test per 1006 document.	6211
	Test per 1006 document except ____	6212
	Test per MIL-STD-810, Method 503.	4710
	Minimum temperature (deg C)	2205
	Tolerance ± (deg C)	2206
	Duration (hrs)	2207
	Maximum temperature (deg C)	2208
	Tolerance ± (deg C)	2209
	Duration (hrs)	2210
	Temperature cycles (quantity)	4704
	(Select one requirement)	
	Requirement(s) per 1006 document.	6213
	Requirement(s) per 1006 document except ____	6214

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.54 (Cont)	Temperature Shock (Cont)	
	Requirement(s) as follows:	
	*No evidence of physical damage.	6215
	Regulation shall remain within specified limits.	2213
5.55	Transient Input	
	(Select one test method)	
	Test per 1006 document.	2215
	Test per 1006 document except ____	2216
	Test per Table VII.	Table VII
	(Select one requirement)	
	Requirement(s) per 1006 document.	2220
	Requirement(s) per 1006 document except ____	2221
	Requirement(s) as follows:	
	Recover automatically to specified performance.	2222
	No flashover or insulation break-down.	2223
	Regulation shall remain within specified limits.	2224

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.56	Vibration, Low Frequency	
	(Select one test method)	
	Test per 1006 document.	1465
	Test per 1006 document except ____	1466
	Test per MIL-STD-202, Method 201.	1467
	Duration of application per axis (hrs)	1470
	(Select one requirement)	
	Requirement(s) per 1006 document.	1474
	Requirement(s) per 1006 document except ___	1475
	Requirement(s) as follows:	
	*No evidence of physical damage.	1476
	Regulation shall remain within specified tolerance.	2229
5.57	Vibration, High Frequency	
	(Select one test method)	
	Test per 1006 document.	1445
	Test per 1006 document except ___	1446

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.57 (Cont)	Vibration, High Frequency (Cont)	
	Test per Method 204, MIL-STD-202.	1447
	*Test condition (letter)	1448
	Method of mounting device(s) (Select one)	
	Any suitable method of mounting.	4709
	Normal method of mounting.	4708
	Mount in accordance with (doc des, 5.7)	4707
	Method of determining mechanical resonance (Select one)	
	Visually, by means of a stroboscope.	1533
	Electrical output indications.	1534
	(Select one requirement)	
	Requirement(s) per 1006 document.	1454
	Requirement(s) per 1006 document except ____	1455

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.57 (Cont)	Vibration, High Frequency (Cont)	
	Requirement(s) as follows:	
	*No evidence of physical damage.	1456
	Regulation shall remain within specified tolerance.	2232
5.58	Vibration, Random	
	(Select one test method)	
	Test per 1006 document.	1425
	Test per 1006 document except ____	1426
	Test per Method 214, MIL-STD-202.	1427
	*Test condition (number and letter)	1428
	Duration of application (Select one)	
	(hrs)	1431
	(min)	1438
	Monitoring instrumentation of the vibration excitation (Select one)	
	Any suitable instrumentation system.	1452

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.58 (Cont)	Vibration, Random (Cont)	
	Calibrated ac to dc converter and strip chart recorder.	1453
	Calibrated oscilloscope.	1459
	Monitoring points (quantity)	1430
	Location of vibration monitoring points (Select one)	
	Any suitable location.	1439
	As close as practical to test device(s).	1462
	Method of mounting (Select one)	
	Any suitable mounting method.	4977
	Normal mounting method.	4976
	Mount in accordance with (doc des, 5.7)	4975

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.58 (Cont)	Vibration, Random (Cont)	
	(Select one requirement)	
	Requirement(s) per 1006 document.	1434
	Requirement(s) per 1006 document except ___	1435
	Requirement(s) as follows:	
	*No evidence of physical damage.	1436
	Regulation shall remain within specified limits.	2235
5.59	Voltage Regulation, Line	
	(Select one test method)	
	Test per 1006 document.	2240
	Test per 1006 document except ___	2241
	Test per MIL-R-55223.	2242
	Test as follows:	
	Minimum input voltage (pct)	2243
	Maximum input voltage (pct)	2244
	Electrical load (ohms)	2245
	Minimum operating duration (s)	2246

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.59 (Cont)	Voltage Regulation, Line (Cont)	
	(Select one requirement)	
	Requirement(s) per 1006 document.	2250
	Requirement(s) per 1006 document except ___	2251
	Requirement(s) as follows:	
	Minimum output voltage (V)	2252
	*Maximum output voltage (V)	2253
	Minimum output frequency (Hz)	2254
	*Maximum output frequency (Hz)	2255
	Minimum regulation (pct)	2256
	Minimum correction rate (V/s)	2257
5.60	Voltage, Regulation, Load	
	(Select one test method)	
	Test per 1006 document.	2260
	Test per 1006 document except ___	2261
	Test per MIL-R-55223.	2262

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.60 (Cont)	Voltage, Regulation, Load (Cont)	
	Test as follows:	
	Minimum input voltage (pct)	2263
	Maximum input voltage (pct)	2264
	Minimum temperature (deg C)	2265
	Maximum temperature (deg C)	2266
	Minimum input frequency (Hz)	2267
	Maximum input frequency (Hz)	2268
	Load steps (quantity)	2269
	*Load/step (pct)	2270
	(Select one requirement)	
	Requirement(s) per 1006 document.	2275
	Requirement(s) per 1006 document except ___	2276
	Requirement(s) as follows:	
	Minimum voltage regulation (pct)	2277
	Minimum voltage regulation at any load step (pct)	2278

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.60 (Cont)	Voltage, Regulation, Load (Cont)	
	Minimum correction rate (V/s)	2279
5.61	Wave Form	
	(Select one test method)	
	Test per 1006 document.	2285
	Test per 1006 document except ___	2286
	Test as follows:	
	Minimum input voltage (pct)	2287
	Maximum input voltage (pct)	2288
	Load steps (no.)	2289
	*Load/step (pct)	2290
	Minimum lagging power factor (no.)	2291
	(Select one requirement)	
	Requirement(s) per 1006 document.	2295
	Requirement(s) per 1006 document except ___	2296

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.61 (Cont)	Wave Form (Cont)	
	Requirement(s) as follows:	
	Maximum crest factor at any load step (pct)	2297
	Maximum any harmonic at any load step (pct)	2298

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 6

USE OF AEDPS

6.1 Procedure

The step by step procedure contained in MIL-STD-35 is applicable to Current and Voltage Regulators.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 7

FIGURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

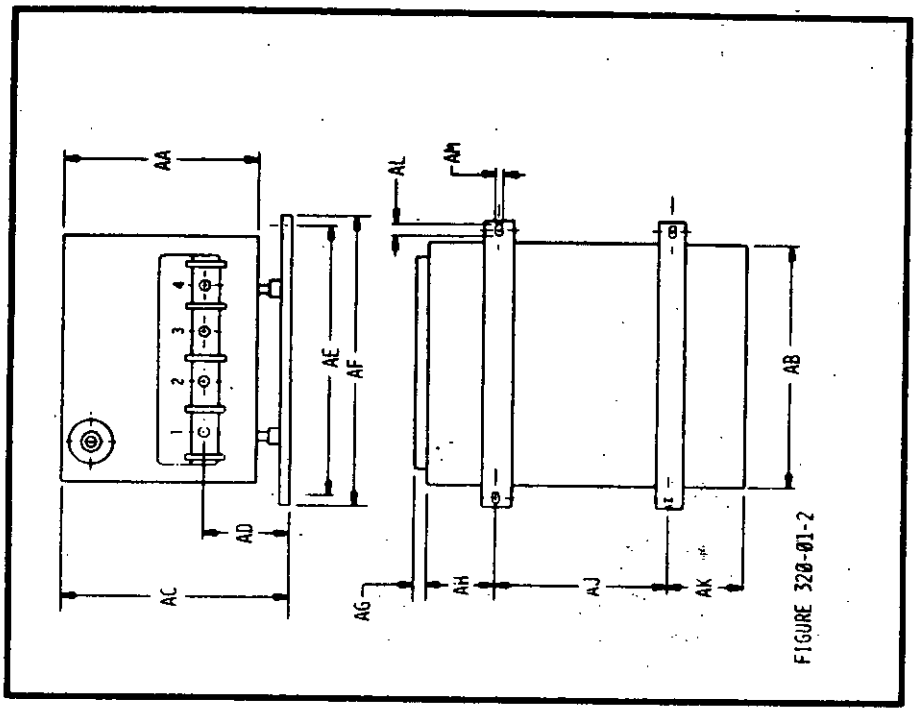


FIGURE 320-01-2

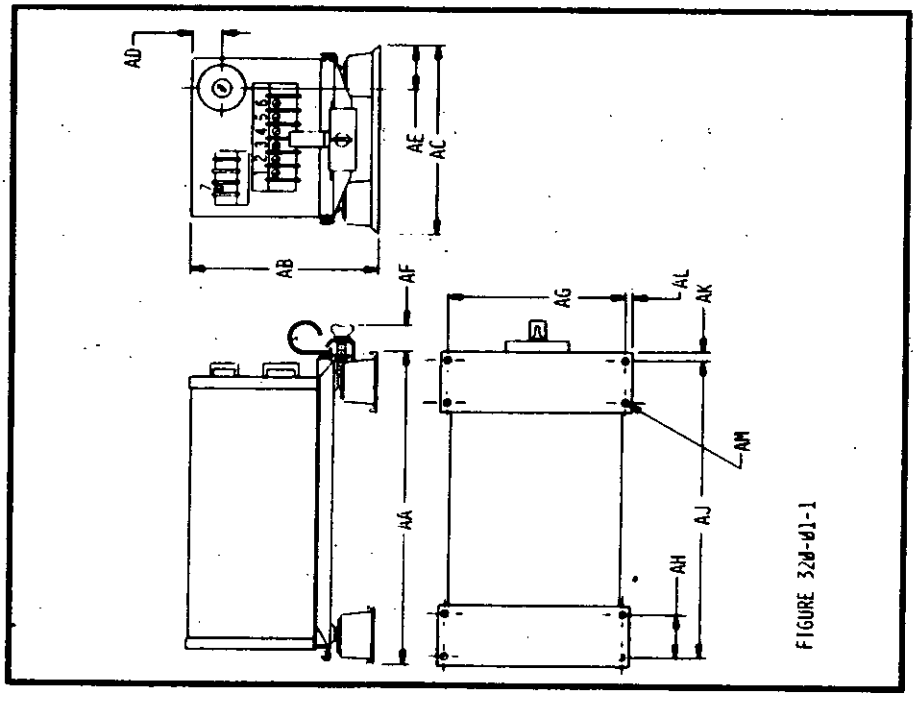


FIGURE 320-01-1

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

THIS SPACE INTENTIONALLY
LEFT BLANK

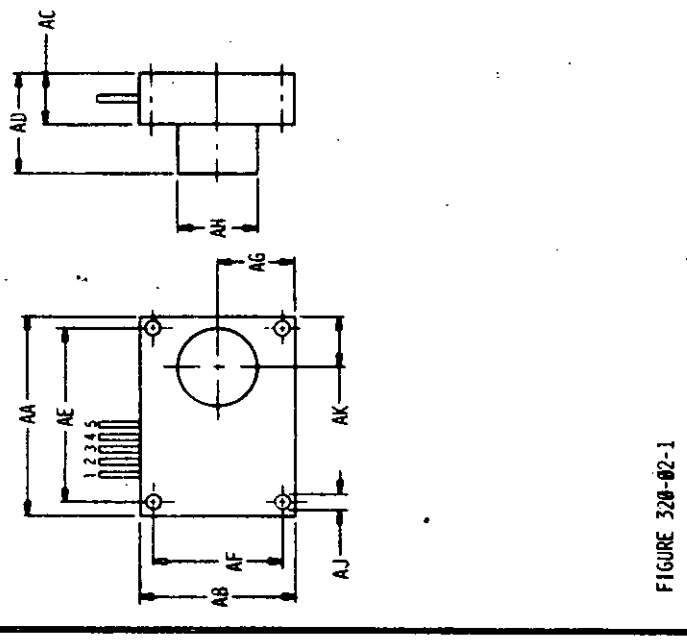


FIGURE 320-02-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS SPACE INTENTIONALLY
LEFT BLANK

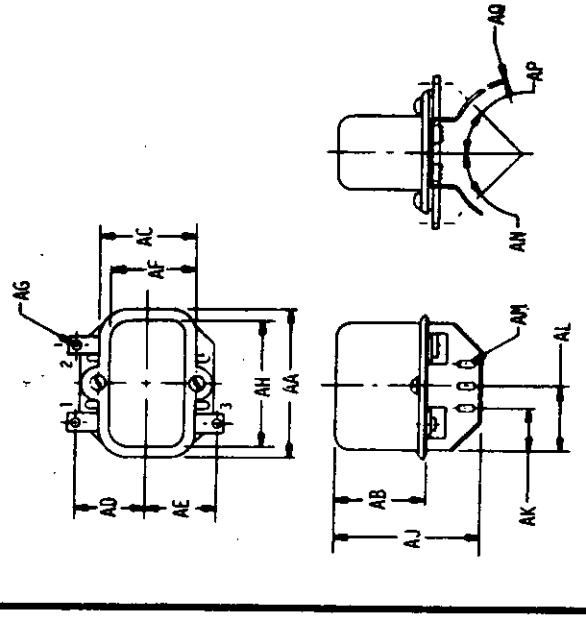


FIGURE 320-03-1

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SECTION 8

TABLES

Tables contained in MIL-STD-35 are applicable to AC and DC Current and Voltage Regulators.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. INPUT
(See 5.9)

INPUT TABLE

	INPUTS					
	1	2	3	4	5	6
NAME	4200	4201	4202	4203	4204	4205
TERMINALS (DESI.)	4206	4207	4208	4209	4210	4211
DC (VOLTS)	4212	4213	4214	4215	4216	4217
AC (VOLTS)	4218	4219	4220	4221	4222	4223
TOLERANCE + OR - (V)	4224	4225	4226	4227	4228	4229
CURRENT (AMPERES)	4230	4231	4232	4233	4234	4235
TOLERANCE + OR - (A)	4236	4237	4238	4239	4240	4241
FREQUENCY (HZ)	4242	4243	4244	4245	4246	4247
TOLERANCE + OR - (HZ)	4248	4249	4250	4251	4252	4253
PHASE (NO.)	4254	4255	4256	4257	4258	4259
	*6	*6	*6	*6	*6	*6

*Number of print characters per column (column width). Heading spans are shown by underlining. Number of print characters will not appear on the generated document.

Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective cells. Only those lines from which codes are used will print. The table will appear in Section 3 of the MSE.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

TABLE II. OUTPUT
(See 5.9)

OUTPUT TABLE

	OUTPUTS			
	1	2	3	4
NAME	3900	3901	3902	3903
TERMINALS (DES)	3904	3905	3906	3907
DC (V)	3908	3909	3910	3911
AC (V)	3912	3913	3914	3915
TOLERANCE + OR - (V)	3916	3917	3918	3919
MIN V REG (PCT)	3920	3921	3922	3923
FREQUENCY (HZ)	3924	3925	3926	3927
TOLERANCE + OR - (HZ)	3928	3929	3930	3931
MIN FREQ REG (PCT)	3932	3933	3934	3935
MIN CURRENT (A)	3936	3937	3938	3939
MAX CURRENT (A)	3940	3941	3942	3943
TEMP (DEG C)	3944	3945	3946	3947
MIN CURRENT REG (PCT)	3948	3949	3950	3951
PHASE (NO.)	3952	3953	3954	3955
POWER (W)	3956	3957	3958	3959
(KVA)	3960	3961	3962	3963
	*8	*8	*8	*8
	REQT	REQT	REQT	REQT

*Number of print characters per column (column width). Heading spans are shown by underlining. Column parameters are indicated as either test or requirement at the end of each column. Number of print characters, "TEST", or "REQT" will not appear on the generated document.

Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective cells. Only those lines from which codes are used will print. The table will appear in Section 3 of the MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE III. CONTROL SIGNAL
(See 5.19)

CONTROL SIGNAL TABLE

INPUT VOLTS	TOL + OR - VOLTS	MEAS FROM	TERM TO	CONT SIG	TOL + OR - VOLTS
4000	4001	4002	4003	4004	4005
4006	4007	4008	4009	4010	4011
4012	4013	4014	4015	4016	4017
4018	4019	4020	4021	4022	4023
4024	4025	4026	4027	4028	4029
4030	4031	4032	4033	4034	4035
4036	4037	4038	4039	4040	4041
*6	*6	*6	*6	*6	*6
TEST	TEST	TEST	TEST	REQT	REQT

*Number of print characters per column (column width). Heading spans are shown by underlining. Column parameters are indicated as either test or requirement at the end of each column. Number of print characters, "TEST", or "REQT" will or "REQT" will not appear on the generated document.

Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective cells. Only those lines from which codes are used will print. The table will appear in Section 3 of the MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE IV. DIELECTRIC WITHSTANDING VOLTAGE
(See 5.22)

DIELECTRIC WITHSTANDING VOLTAGE TABLE

APPLICATION PTS		SHORTED	TEST	TEST FREQ	TEST	DISCONNECT
FROM	TO	TERMINALS	(VAC)	HERTZ	(VDC)	COMP.
4300	4301	4302	4303	4304	4305	4306
4307	4308	4309	4310	4311	4312	4313
4314	4315	4316	4317	4318	4319	4320
4321	4322	4323	4324	4325	4326	4327
4328	4329	4330	4331	4332	4333	4334
4335	4336	4337	4338	4339	4340	4341
4342	4343	4344	4345	4346	4347	4348
4349	4350	4351	4352	4353	4354	4355
4356	4357	4358	4359	4360	4361	4362
4363	4364	4365	4366	4367	4368	4369
4370	4371	4372	4373	4374	4375	4376
4377	4378	4379	4380	4381	4382	4383
4384	4385	4386	4387	4388	4389	4390
4391	4392	4393	4394	4395	4396	4397
4398	4399	4400	4401	4402	4403	4404
4405	4406	4407	4408	4409	4410	4411
4412	4413	4414	4415	4416	4417	4418
4419	4420	4421	4422	4423	4424	4425
4426	4427	4428	4429	4430	4431	4432
4433	4434	4435	4436	4437	4438	4439
*6	*6	*9	*5	*9	*5	*10
TEST	TEST	TEST	TEST	TEST	TEST	TEST

*Number of print characters per column (column width). Heading spans are shown by underlining. Column parameters are indicated as either test or requirement at the end of each column. Number of print characters, "TEST", or "REQT" will not appear on the generated document.

Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective cells. Only those lines from which codes are used will print. The table will appear in Section 4 of the MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE V. OUTPUT VOLTAGE ADJUST
(See 5.38)

OUTPUT VOLTAGE ADJUST TABLE

INPUT				OUTPUT			
(V)	TOL + OR - (V)	FREQ (HZ)	TOL + OR - (HZ)	MIN L (A)	MAX L (A)	MIN (V)	MAX (V)
4100	4101	4102	4103	4104	4105	4106	4107
4108	4109	4110	4111	4112	4113	4114	4115
4116	4117	4118	4119	4120	4121	4122	4123
4124	4125	4126	4127	4128	4129	4130	4131
4132	4133	4134	4135	4136	4137	4138	4139
4140	4141	4142	4143	4144	4145	4146	4147
4148	4149	4150	4151	4152	4153	4154	4155
*6	*6	*6	*6	*6	*6	*6	*6
TEST	TEST	TEST	TEST	TEST	TEST	REQT	REQT

*Number of print characters per column (column width). Heading spans are shown by underlining. Column parameters are indicated as either test or requirement at the end of each column. Number of print characters, "TEST", or "REQT" will not appear on the generated document.

Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective cells. Only those lines from which codes are used will print. The table will appear in Section 4 of the MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE VI. RECOVERY TIME TEST
(See 5.43)

RECOVERY TIME TEST TABLE

TEMP DEG C	LOAD (PCT)	SW TO LOAD (PCT)	SW TO LOAD (PCT)	OUTPUT V (PCT)	RECOVERY V (PCT) MIN	RECOVERY T (S) MAX
4060	4061	4062	4063	4064	4065	4066
4067	4068	4069	4070	4071	4072	4073
4074	4075	4076	4077	4078	4079	4080
4081	4082	4083	4084	4085	4086	4087
4088	4089	4090	4091	4092	4093	4094
*5	*5	*10	*10	*7	*11	*9
TEST	TEST	TEST	TEST	TEST	REQT	REQT

*Number of print characters per column (column width). Heading spans are shown by underlining. Column parameters are indicated as either test or requirement at the end of each column. Number of print characters, "TEST", or "REQT" will not appear on the generated document.

Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective cells. Only those lines from which codes are used will print. The table will appear in Section 4 of the MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE VII. TRANSIENT INPUT TEST
(See 5.55)

TRANSIENT INPUT TEST TABLE

TEST NO.	INPUT VOLTS (V)	DURATION (S)	NO. OF APPLICATIONS
1	4500	4501	4502
2	4503	4504	4505
3	4506	4507	4508
4	4509	4510	4511
5	4512	4513	4514
	*9	*8	*12

*Number of print characters per column (column width). Heading spans are shown by underlining. Number of print characters will not appear on the generated document.

Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective cells. Only those lines from which codes are used will print. The table will appear in Section 4 of the MSE.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of MIL-STD-35-96 (MI), dated 16 Feb 1976 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Custodians:
Army-MI

Review Activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User Activity:
Army-MU

Preparing Activity:
Army-MI
Project EDS-A113

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY
LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Missile Command
ATTN: DRSMI-RCS
Redstone Arsenal, Al 35809

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)* ☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*:
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.