NOT MEASUREMENT SENSITIVE

MIL-STD-35-97B (MI)
19 JULY 1990
SUPERSEDING
DOD-STD-35-97A (MI)
9 SEPTEMBER 1983

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

RESISTOR NETWORKS

AMSC N/A

AREA EDS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

FOREWORD

1. This Military Standard is approved for use by AMC, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Command, ATTN: AMSMI-RD-SE-TD-ST, Redstone Arsenal, Alabama 35898-5270, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

3. The purpose of MIL-STD-35-97B(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for Resistor Networks.

4. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the MIL-STD-35.

5. It is important that the procedures described in the basic document (MIL-STD-35) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	3
	2.1	Government documents	3
	2.2	Non-government documents	3
	2.3	Order of precedence	4
	3.	DEFINITIONS	5
	4.	GENERAL REQUIREMENTS	7
	4.1	Introduction	7
	4.2	Specification Requirement Sheet (SRS)	7
	4.3	Configuration	7
	4.3.1	Dimensions	7
	4.3.2	Illustrations	7
	4.4	Units of measure	7
	5.	DETAILED REQUIREMENTS	9
	5.1	Introduction	9
	5.2	MSE Formats	9
	5.3	Referenced documents	9
	5.4	Tabulation	9
	5.5	Keyword Code Index (KCI) and Standard Paragraphs	11
	5.5.1	Interrelationship of Codes	11
	5.5.2	Automatic MDE Data	11
	5.5.3	MIL-STD-35 Tables	11
	6.	NOTES	110
	6.1	Intended use	110

TABLES

Table	I.	Title Index	2
	II.	Tabulation candidates	10

APPENDIX

Appendix	A	Illustrations	113
	B	Characteristic Code Index	136
		Index	141

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS) provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for Resistor Networks.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate a MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (MIL-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects applicable to all AEDPS dash-numbered parts and included in MIL-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specification (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for a MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSEs for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes, listed in the Title Index and entered on a SRS, specifies that the title of the MSE will be the title shown in the Title Index.

Each MSE title, listed in the Title Index, is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference. When more than one document is listed for a MSE title, this information will be useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX

MSE TITLE	TITLE CODE	BASE DOCUMENT	
		NUMBER	COVERAGE
RESISTOR NETWORK, FIXED, FILM	005001	MIL-R-83401	FIXED FILM
RESISTOR NETWORK, FIXED, WIREWOUND	005002	MIL-R-83401	WIREWOUND
RESISTOR NETWORK	005003	MIL-R-83401	FIXED FILM
RESISTOR-CAPACITOR NETWORK	005004	MIL-R-83401	FIXED FILM-CERAMIC CAP.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Government Documents.

2.1.1 Specifications and Standards. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

MILITARY

MIL-R-83401	Resistor Networks, Fixed Film, and Resistor-Capacitor Networks, Fixed Film Resistors and Ceramic Capacitor, General Specification For

STANDARD

MILITARY

MIL-STD-35	Automated Engineering Document Preparation System
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-810	Environmental Test Methods and Engineering Guidelines
MIL-STD-1276	Leads for Electronic Component Parts

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center, (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099).

2.2 Non-government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the document cited in the solicitation (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

ASTME380 Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, PA 19103.)

(Non-government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services).

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in MIL-STD-35 are applicable to Resistor Networks.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare a SRS for Resistor Networks, it is necessary to use MIL-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in MIL-STD-35 are applicable to Resistor Networks.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions, described in MIL-STD-35, are applicable to Resistor Networks.

4.3.2 Illustrations. Illustrations applicable to Resistor Networks are contained in Appendix A to this document.

4.4 Units of Measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in MIL-STD-35.

5.2 MSE Formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in MIL-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced Documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in MIL-STD-35.

5.4 Tabulation. Instructions for tabulation are provided in MIL-STD-35. Table II provides codes for column headings which may be used for Resistor Networks characteristics. When different units of measure are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

TABLE II. TABULATION CANDIDATES

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1562	PWR RATING EACH RES WATTS	1564	MAXIMUM NETWORK WATTS	1570	CHARACTER-ISTIC
1572	SCHEMATIC	1574	NUMBER OF RESISTORS	1576	NUMBER OF PACKAGE LEADS
1578	STYLE	1642	V RATING EACH RES VOLTS DC	1714	CAPACITOR MICROFARAD
1716	CAPACITOR PICOFARAD	3000	RESISTANCE ALL EQUAL OHMS	3001	R1 OHMS

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE II. TABULATION CANDIDATES (cont)

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
3002	R2 OHMS	3003	R3 OHMS	3004	R4 OHMS
3005	R5 OHMS	3006	R6 OHMS	3007	R7 OHMS
3008	R8 OHMS	3009	R9 OHMS	3010	R10 OHMS
3011	R11 OHMS	3012	R12 OHMS	3050	RESISTANCE TOLERANCE PCT

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

5.5 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on a SRS, that are unique for the type part covered by this dash-numbered part of MIL-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and it's associated code. Enter, on the SRS, the code and the characteristic value required. After the part's unique characteristics have been specified, refer to MIL-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in MIL-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.5.1 Interrelationship of Codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The standard paragraph, of which the code is a part, is shown adjacent to the code on the right-hand page. When a characteristic value, entered with a code, becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact characteristic value entry, as supplied with the code, except for "X" entries.

5.5.2 Automatic MSE Data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without making additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.5.3 MIL-STD-35 Tables. The KCI of this document contains references to tables in MIL-STD-35. Refer to MIL-STD-35 for general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*REQUESTER'S CAGE CODE	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY CAGE CODE	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT.	0700
ONE SECTION DOCUMENT.	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1004	USER(S) CAGE CODE 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY CAGE CODE 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF MIL-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6874 THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).

0107

0108 0108.

SCOPE.

SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.

PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.

PART NUMBER. THE PART NUMBER FOR THE ITEMS IS (THE SAME AS THE NUMBER OF THIS DOCUMENT) PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

6941 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.

6942 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX

CHARACTERISTIC NAME	CHAR CODE
ALTITUDE RATING	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5060
SEA LEVEL TO (METERS)	5061
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5062
SEA LEVEL TO (METERS)	5063
TEMPERATURE RATING	
MAXIMUM OPERATING (DEGEES CELSIUS)	5069
MAXIMUM NONOPERATING (DEGREES CELSIUS)	5071
MAXIMUM STORAGE (DEGREES CELSIUS)	7302
MAXIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5054
MINIMUM OPERATING (DEGREES CELSIUS)	5068
MINIMUM NONOPERATING (DEGREES CELSIUS)	5070

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ALTITUDE RATING.
5060	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO LEVEL TO 5060 FEET.
5061	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5061 METERS.
5062	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5062 FEET.
5063	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5063 METERS.
	TEMPERATURE RATING.
5069	THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS.
5071	THE MAXIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5071 DEGREES CELSIUS.
7302	THE MAXIMUM STORAGE TEMPERATURE RATING SHALL BE 7302 DEGREES CELSIUS.
5054	THE MAXIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5054 DEGREES CELSIUS.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS
5070	THE MINIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5070 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION.	
PER BASE DOCUMENT	
CHARACTERISTIC (DESIGNATION)	1570
SCHEMATIC (DESIGNATION)	1572
RESISTORS (NUMBER)	1574
CAPACITORS (NUMBER)	1582
LEADS (NUMBER)	1576
STYLE (DESIGNATION)	1578
TOLERANCE (DESIGNATION)	1580
RATINGS.	
POWER RATING.	
EACH RESISTOR (SELECT ONE)	
(WATTS)	1562
(MILIWATTS)	1563

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CLASSIFICATION.
1570	CHARACTERISTIC. CHARACTERISTIC 1570 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1572	SCHEMATIC. SCHEMATIC 1572 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1574	THERE SHALL BE 1574 RESISTORS.
1582	THERE SHALL BE 1582 CAPACITOR(S).
1576	THERE SHALL BE 1576 LEADS ON THE PACKAGE.
1578	STYLE. STYLE 1578 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1580	TOLERANCE. TOLERANCE 1580 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
	RATINGS.
	POWER RATING.
1562	THE POWER RATING APPLICABLE TO EACH RESISTOR IN THE NETWORK SHALL BE 1562 WATT(S).
1563	THE POWER RATING APPLICABLE TO EACH RESISTOR IN THE NETWORK SHALL BE 1563 MILLIWATTS.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX

CHARACTERISTIC NAME	CHAR CODE
NETWORK (WATTS)	1564
RATING TEMPERATURE (DEGREES CELSIUS)	1566
DERATE TO ZERO WATTS AT (DEGREES CELSIUS)	1568
VOLTAGE RATING.	
MAXIMUM CONTINUOUS WORKING VOLTAGE (VOLTS DC OR RMS)	1642
MAXIMUM VOLTAGE (VOLTS DC)	1644
VOLTAGE	1646
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
DIMENSION TABLE, (SEE TABLE III, MIL-STD-35)	
*UNITS (SELECT ONE)	
U.S.	
INCHES.	7572
SI	
MILLIMETERS	7577

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1564	THE POWER RATING OF THE NETWORK (PACKAGE) SHALL BE 1564 WATT(S).
1566	THE POWER RATING(S) SHALL BE AT A TEMPERATURE OF 1566 DEGREES CELSIUS.
1568	THE POWER RATING(S) SHALL DERATE TO ZERO WATTS AT 1568 DEGREES CELSIUS.
	VOLTAGE RATING.
1642	THE MAXIMUM VOLTAGE RATING SHALL BE 1642 VOLTS DC.
1644	THE MAXIMUM CONTINUOUS WORKING VOLTAGE SHALL BE NOT GREATER THAN 1644 VOLTS DC OR AC RMS.
1646	THE VOLTAGE RATING SHALL BE 1646.
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950
NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.	
TABULATED CHARACTERISTICS (SEE TABLE IV, MIL-STD-35)	
MATERIALS (SEE TABLE VI, MIL-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VI IS USED.	
FINISHES (SEE TABLE VII, MIL-STD-35).	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
METALS	
DISSIMILAR METALS.	7580
DESIGN AND CONSTRUCTION	
NETWORK TYPE ____	1650

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currenversion before use.

CHAR CODE	STANDARD PARAGRAPH
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.
	MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
	FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
7580	METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.
	DESIGN AND CONSTRUCTION
1650	TYPE. NETWORK SHALL BE 1650.
	DC RESISTANCE AND TOLERANCE. DC RESISTANCE AND TOLERANCE SHALL BE IN ACCORDANCE WITH THE DC RESISTANCE AND TOLERANCE TABLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

DC RESISTANCE AND TOLERANCE TABLE

RESISTOR	NOMINAL RESISTANCE	TOLERANCE PERCENT	RATIO PERCENT	RATIO PCT 25 DEG C.	MAX. RATIO TEMP COEFF PPM/DEG C.
ALL EQUAL	3000	3050	3100	3150	3200
R1	3001	3051	3101	3151	3201
R2	3002	3052	3102	3152	3202
R3	3003	3053	3103	3153	3203
R4	3004	3054	3104	3154	3204
R5	3005	3055	3105	3155	3205
R6	3006	3056	3106	3156	3206
R7	3007	3057	3107	3157	3207
R8	3008	3058	3108	3158	3208
R9	3009	3059	3109	3159	3209
R10	3010	3060	3110	3160	3210
R11	3011	3061	3111	3161	3211
R12	3012	3062	3112	3162	3212
R13	3013	3063	3113	3163	3213
R14	3014	3064	3114	3164	3214
R15	3015	3065	3115	3165	3215
R16	3016	3066	3116	3166	3216
R17	3017	3067	3117	3167	3217
R18	3018	3068	3118	3168	3218
R19	3019	3069	3119	3169	3219
R20	3020	3070	3120	3170	3220
R21	3021	3071	3121	3171	3221
R22	3022	3072	3122	3172	3222
R23	3023	3073	3123	3173	3223
R24	3024	3074	3124	3174	3224
R25	3025	3075	3125	3175	3225
R26	3026	3076	3126	3176	3226
R27	3027	3077	3127	3177	3227
R28	3028	3078	3128	3178	3228
R29	3029	3079	3129	3179	3229
R30	3030	3080	3130	3180	3230
R31	3031	3081	3131	3181	3231
R32	3033	3082	3132	3182	3232
R33	3033	3083	3133	3183	3233
R34	3034	3084	3134	3184	3234
R35	3035	3085	3135	3185	3235
R36	3036	3086	3136	3186	3236
R37	3037	3087	3137	3187	3237
R38	3038	3088	3138	3188	3238
R39	3039	3089	3139	3189	3239
R40	3040	3090	3140	3190	3240

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
REFERENCE RESISTOR (RESISTOR NUMBER)	3300
FULL SCALE ACCURACY OVER TEMPERATURE RANGE ____	3302
ABSOLUTE TOLERANCE ____	3304
RESISTANCE MATCHING OVER TEMPERATURE RANGE (PERCENT)	3306
RESISTANCE RATIO OVER TEMPERATURE RANGE (PERCENT)	3308
APPLICATION RESISTORS OUTPUT VOLTAGE RATIO (PERCENT)	3310
MAXIMUM DIFFERENCE OR VOLTAGE RATIO ERROR (PERCENT)	3312
POWER COEFFICIENT	
MAXIMUM (PERCENT)	3314
RISE TIME	
MAXIMUM (NANOSECONDS)	3316
TRACKING	
(PPM/DEGREE CELSIUS)	1614
TRACKING LOW TEMPERATURE (DEGREES CELSIUS)	1618
TRACKING HIGH TEMPERATURE (DEGREES CELSIUS)	1620

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3300	REFERENCE RESISTOR SHALL BE 3300.
3302	FULL SCALE ACCURACY OVER THE OPERATING TEMPERATURE RANGE SHALL BE 3302.
3304	ABSOLUTE TOLERANCE SHALL BE 3304.
3306	RESISTANCE MATCHING SHALL BE 3306 PERCENT OVER THE OPERATING TEMPERATURE RANGE.
3308	RESISTANCE RATIO(S) SHALL BE 3308 PERCENT OVER THE OPERATING TEMPERATURE RANGE.
3310	APPLICATION RESISTOR(S) OUTPUT VOLTAGE RATIO SHALL BE 3310 PERCENT.
3312	THE DIFFERENCE OR VOLTAGE RATIO ERROR SHALL BE NOT GREATER THAN 3312 PERCENT.
3314	POWER COEFFICIENT. THE POWER COEFFICIENT SHALL BE NOT GREATER THAN 3314 PERCENT.
3316	RISE TIME. RISE TIME SHALL BE NOT GREATER THAN 3316 NANOSECONDS.
1614	TRACKING. TEMPERATURE TRACKING BETWEEN RESISTORS SHALL BE 1614 PPM/DEGREE CELSIUS.
1618	THE LOW TEMPERATURE APPLICABLE TO TEMPERATURE SHALL BE 1618 DEGREES CELSIUS.
1620	THE HIGH TEMPERATURE APPLICABLE TO TEMPERATURE TRACKING SHALL BE 1620 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENCLOSURE (SELECT ONE)	
HERMETIC.	1664
MOLDED.	1660
ENCAPSULATED.	1666
DIPPED.	1662
ENCLOSURE ____	1668
TERMINATION (SELECT ONE)	
LEADS SOLDERABLE.	1680
LEADS WELDABLE.	1682
LEADS SOLDERABLE/WELDABLE.	1684
LEADS MIL-STD-1276 (TYPE)	1686
LEADS ____	1688
CAPACITANCE (SELECT ONE)	
(MICROFARADS)	1746
(PICOFARADS)	1748
CAPACITOR TYPE	
TYPE	1752
ALTITUDE	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	6790
SEA LEVEL TO (METERS)	6791

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ENCLOSURE.
1664	THE NETWORK ENCLOSURE SHALL BE HERMETICALLY SEALED.
1660	THE NETWORK ENCLOSURE SHALL BE MOLDED.
1666	THE NETWORK ENCLOSURE SHALL BE ENCAPSULATED.
1662	THE NETWORK ENCLOUSRE SHALL BE DIPPED.
1668	THE NETWORK ENCLOSURE SHALL BE 1668.
	TERMINATION.
1680	LEADS SHALL BE SOLDERABLE.
1682	LEADS SHALL BE WELDABLE.
1684	LEADS SHALL BE SOLDERABLE/WELDABLE.
1686	LEADS SHALL BE TYPE 1686 PER MIL-STD-1276.
1688	LEADS SHALL BE 1688.
	CAPACITANCE
1746	THE CAPACITANCE SHALL BE 1746 MICROFARAD(S).
1748	THE CAPACITANCE SHALL BE 1748 PICOFARAD(S).
1752	THE CAPACITOR TYPE SHALL BE 1752.
6790	OPERATING ALTITUDE. THE OPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6790 FEET.
6791	OPERATING ALTITUDE. THE OPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6791 METER(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	6792
SEA LEVEL TO (METERS)	6793
TEMPERATURE	
MAXIMUM OPERATING (DEGREES CELSIUS)	6794
MAXIMUM NONOPERATING (DEGREES CELSIUS)	6795
MAXIMUM AMBIENT OPERATING (DEGREES CELSIUS)	6798
MINIMUM OPERATING (DEGREES CELSIUS)	6799
MINIMUM AMBIENT OPERATING (DEGREES CELSIUS)	6803
WEIGHT MASS	
MAXIMUM WEIGHT/MASS PER UNIT (SELECT ONE)	
(OUNCES)	7022
(GRAMS)	7021
ACCELERATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6272
NO EVIDENCE OF PHYSICAL DAMAGE.	6273

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6792	NONOPERATING ALTITUDE. THE NONOPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6792 FEET
6793	NONOPERATING ALTITUDE. THE NONOPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6793 METERS.
6794	MAXIMUM OPERATING TEMPERATURE. THE OPERATING TEMPERATURE SHALL BE NO GREATER THAN 6794 DEGREES CELSIUS.
6795	MAXIMUM NONOPERATING TEMPERATURE. THE NONOPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6795 DEGREES CELSIUS.
6798	MAXIMUM AMBIENT OPERATING TEMPERATURE. THE AMBIENT OPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6798 DEGREES CELSIUS.
6799	MINIMUM OPERATING TEMPERATURE. THE OPERATING TEMPERATURE SHALL BE NOT LESS THAN 6799 DEGREES CELSIUS.
6803	MINIMUM AMBIENT OPERATING TEMPERATURE. THE AMBIENT OPERATING TEMPERATURE SHALL BE NOT LESS THAN 6803 DEGREES CELSIUS.
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7021	MAXIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
6272	ACCELERATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6272.
6273	ACCELERATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
REMAIN WITHIN SPECIFIED TOLERANCE.	6277
MAXIMUM RESISTANCE CHANGE (PERCENT)	2300
MAXIMUM RESISTANCE RATIO CHANGE (PERCENT)	2302
MAXIMUM CAPACITANCE CHANGE (PERCENT)	2304
MAXIMUM DISSIPATION FACTOR (PERCENT)	2306
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6250
PER MIL-STD-202, METHOD 212.	6251
*TEST CONDITION LETTER (SELECT ONE)	
TEST CONDITION LETTER A.	6226
*LEVEL (SELECT ONE)	
20 G'S.	4863
50 G'S.	4864
100 G'S.	4865
TEST CONDITION LETTER B.	6233
*LEVEL (SELECT ONE)	
10,000 G'S.	4868
20,000 G'S.	4892
DIRECTION (SELECT ONE)	
ONE DIRECTION.	1557

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6277	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
2300	CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN PLUS OR MINUS 2300 PERCENT PLUS 0.01 OHM.
2302	THE CHANGE IN RESISTANCE RATIO SHALL BE NOT GREATER THAN 2302 PERCENT.
2304	THE CHANGE IN CAPACITANCE SHALL BE NOT GREATER THAN 2304 PERCENT.
2306	THE DISSIPATION FACTOR SHALL BE NOT GREATER THAN 2306 PERCENT.
6250	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6250.
6251	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 212 OF MIL-STD-202.
6226	TEST CONDITION LETTER A SHALL APPLY.
4863	THE TEST LEVEL SHALL BE 20 G'S.
4864	THE TEST LEVEL SHALL BE 50 G'S.
4865	THE TEST LEVEL SHALL BE 100 G'S.
6233	TEST CONDITION LETTER B SHALL APPLY.
4868	THE TEST LEVEL SHALL BE 10,000 G'S.
4892	THE TEST LEVEL SHALL BE 20,000 G'S.
1557	THE SPECIMEN SHALL BE ACCELERATED IN ONE DIRECTION ONLY.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
BOTH DIRECTIONS.	1558
TEST CONDITION LETTER C.	6239
*LEVEL (G'S)	4893
MOUNTING (SELECT ONE)	
MOUNT BY ANY SUITABLE METHOD.	6263
MOUNT BY MORMAL METHOD.	6264
MOUNT PER DOCUMENT (DOC DES)	6265
CAPACITANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1710
AS FOLLOWS:	1712
(MICROFARADS)	1714
(PICOFARADS)	1716
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1690
PER MIL-STD-202, METHOD 305.	1692
*TEST FREQUENCY (HERTZ)	1694
TEST FREQUENCY TOLERANCE (HERTZ)	1696
TEST EQUIPMENT ACCURACY (PERCENT)	1698
POLARIZING VOLTAGE (VOLTS, DC)	1700

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1558	THE SPECIMEN SHALL BE ACCELERATED IN BOTH DIRECTIONS.
6239	TEST CONDITION LETTER C SHALL APPLY.
4893	THE TEST LEVEL SHALL BE 4893 G'S.
6263	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
6264	MOUNTING SHALL BE BY THE NORMAL METHOD.
6265	MOUNTING SHALL BE IN ACCORDANCE WITH 6265.
1710	CAPACITANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1710.
1712	CAPACITANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1714	THE CAPACITANCE SHALL BE 1714 MICROFARAD(S).
1716	THE CAPACITANCE SHALL BE 1716 PICOFARAD(S).
1690	CAPACITANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1690.
1692	CAPACITANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 305 OF MIL-STD-202.
1694	THE TEST FREQUENCY SHALL BE 1694 HERTZ.
1696	THE TEST FREQUENCY TOLERANCE SHALL BE 1696 HERTZ.
1698	THE ACCURACY OF THE TEST EQUIPMENT SHALL BE WITHIN 1698 PERCENT OF THE READING.
1700	THE POLARIZING VOLTAGE SHALL BE 1700 VOLT(S) DC.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMPRESSED VOLTAGE	
MAXIMUM (VOLTS)	1702
MINIMUM (VOLTS)	1704
TEST VOLTAGE (VOLTS)	1706
TEST EQUIPMENT (DEGREES CELSIUS)	1708
CAPACITANCE-TEMPERATURE CHARACTERISTIC	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1776
AS FOLLOWS:	1778
REFERENCED (PPM/DEGREES CELSIUS)	1782
OVER TEMPERATURE RANGE (PERCENT)	1796
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1786
AS FOLLOWS:	1788
TEST VOLTAGE (VOLTS DC OR RMS)	1912
TEST FREQUENCY (HERTZ)	1914
POLARIZING VOLTAGE (VOLTS DC)	1810

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1702	THE IMPRESSED VOLTAHE SHALL BE NOT GREATER THAN 1702 VOLT(S).
1704	THE IMPRESSED VOLTAGE SHALL BE NOT LESS THAN 1704 VOLT(S).
1706	THE TEST VOLTAGE SHALL BE 1706 VOLT(S).
1708	THE TEST TEMPERATURE SHALL BE 1708 DEGREES CELSIUS.
1776	CAPACITANCE-TEMPERATURE CHARACTERISTIC. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1776.
1778	CAPACITANCE-TEMPERATURE CHARACTERISTIC. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1782	THE CAPACITANCE-TEMPERATURE COEFFICIENT SHALL BE NOT GREATER THAN 1782 PPM/DEGREES CELSIUS WHEN REFERENCED TO THE CAPACITANCE READING AT 25 DEGREES CELSIUS.
1796	THE CAPACITANCE-TEMPERATURE CHARACTERISTIC SHALL BE NOT GREATER THAN 1796 PERCENT OVER THE OPERATING TEMPERATURE RANGE.
1786	CAPACITANCE-TEMPERATURE CHARACTERISTIC. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1786.
1788	CAPACITANCE-TEMPERATURE CHARACTERISTIC. TESTING SHALL BE PERFORMED AS FOLLOWS:
1912	THE TEST VOLTAGE SHALL BE 1912 VOLT(S) DC OR RMS.
1914	TESTING SHALL BE PERFORMED AT A FREQUENCY OF 1914 HERTZ.
1810	THE POLARIZING VOLTAGE SHALL BE 1810 VOLT(S) DC.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST TEMPERATURE	
HIGH (DEGREES CELSIUS)	1812
LOW (DEGREES CELSIUS)	1836
CAPACITOR INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1718
AS FOLLOWS:	1722
*MINIMUM INSULATION RESISTANCE	
*SINGLE TEST	
(MEGOHMS)	1726
*MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	1728
*SECOND TEST (MEGOHMS)	1732
REMAIN WITHIN SPECIFIED TOLERANCE.	1798
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1838
PER MIL-STD-202, METHOD 302.	1860
*CONDITION (SELECT ONE)	
TEST CONDITION (LETTER)	1868

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1812	THE HIGH TEST TEMPERATURE SHALL BE 1812 DEGREES CELSIUS.
1836	THE LOW TEST TEMPERATURE SHALL BE 1836 DEGREES CELSIUS.
1718	CAPACITOR INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1718.
1722	CAPACITOR INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1726	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1726 MEGOHM(S).
1728	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1728 MEGOHM(S) AT THE FIRST TEST TEMPERATURE.
1732	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1732 MEGOHM(S) AT THE SECOND TEST TEMPERATURE.
1798	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1838	CAPACITOR INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1838.
1860	CAPACITOR INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 302 OF MIL-STD-202.
1868	TEST CONDITION LETTER 1868 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST VOLTAGE (VOLTS)	1916
ELECTRIFICATION TIME (SELECT ONE)	
(SECONDS)	1918
(MINUTES)	1928
MAXIMUM MEASUREMENT ERROR AT REQUIRED VALUE (PERCENT)	1930
POINTS OF APPLICATION OF TEST VOLTAGE	
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	1932
BETWEEN MUTUALLY INSULATED PARTS.	1936
SPECIAL PREPARATIONS OR CONDITIONS PER DOCUMENT (DOC DES)	1938
FIRST TEST TEMPERATURE (DEGREES CELSIUS)	1940
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	1948
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1950
DC RESISTANCE	
REQUIREMENTS PER DC RESISTANCE AND TOLERANCE TABLE	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT____	1942
PER MIL-STD-202, METHOD 303.	1944

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1916	TEST POTENTIAL SHALL BE 1916 VOLTS DC.
1918	ELECTRIFICATION DURATION SHALL BE 1918 SECOND(S).
1928	ELECTRIFICATION DURATION SHALL BE 1928 MINUTE(S).
1930	THE MEASUREMENTE ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1930 PERCENT.
1932	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
1936	BETWEEN MUTUALLY INSULATED PARTS.
1938	SPECIAL PREPARATIONS OR CONDITIONS SHALL BE IN ACCORDANCE WITH 1938.
1940	FIRST TEST TEMPERATURE SHALL BE 1940 DEGREES CELSIUS.
1948	SECOND TEST TEMPERATURE SHALL BE 1948 DEGREES CELSIUS.
1950	TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1950 DEGREES CELSIUS.
1942	DC RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1942.
1944	DC RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 303 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST VOLTAGE (VOLTS DC)	1946
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4908
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING OR INSULATION BREAKDOWN.	4906
MAXIMUM LEAKAGE (MILLIAMPERES)	4894
REMAIN WITHIN SPECIFIED TOLERANCE.	4901
MAXIMUM RESISTANCE CHANGE (PERCENT)	1724
MAXIMUM RESISTANCE RATIO CHANGE (PERCENT)	2310
MAXIMUM CAPACITANCE CHANGE (PERCENT)	2312
MAXIMUM DISSIPATION FACTOR (PERCENT)	2314
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4884
PER MIL-STD-202, METHOD 301.	6300

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1946	THE TEST VOLTAGE SHALL BE 1946 VOLT(S).
4908	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4908.
4906	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4894	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4894 MILLIAMPERE(S).
4901	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1724	CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN PLUS OR MINUS 1724 PERCENT PLUS 0.01 OHM.
2310	THE CHANGE IN RESISTANCE RATIO SHALL BE NOT GREATER THAN 2310 PERCENT.
2312	THE CHANGE IN CAPACITANCE SHALL BE NOT GREATER THAN 2312 PERCENT.
2314	THE DISSIPATION FACTOR SHALL BE NOT GREATER THAN 2314 PERCENT.
4884	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4884.
6300	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*ALTITUDE PER METHOD 105 OF MIL-STD-202	
*TEST CONDITION (LETTER)	4886
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4885
(VOLTS, AC)	4849
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	6311
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	6312
BETWEEN MUTUALLY INSULATED PARTS.	6292
BETWEEN ALL INSULATED PARTS AND GROUND.	6293
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	6294
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4859
DURATION OF VOLTAGE APPLICATION (SECONDS)	4891
MOUNTING PER DOCUMENT (DOC DES)	6280
REGULATION OF TEST VOLTAGE (PERCENT)	6308
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4900

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4886	ALTITUDE SHALL BE IN ACCORDANCE WITH TEST CONDITION LETTER 4886 OF METHOD 105 OF MIL-STD-202.
4885	TEST VOLTAGE SHALL BE 4885 VOLT(S), DC.
4849	TEST VOLTAGE SHALL BE 4849 VOLT(S), AC.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
6311	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
6312	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
6292	BETWEEN MUTUALLY INSULATED PARTS AND GROUND.
6293	BETWEEN ALL INSULATED PARTS AND GROUND.
6294	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
4859	SPECIAL PREPARATION SHALL BE IN ACCORDANCE WITH 4859.
4891	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4894 SECOND(S).
6280	MOUNTING SHALL BE IN ACCORDANCE WITH 6280.
6308	REGULATION OF THE TEST VOLTAGE SHALL BE WITHIN 6308 PERCENT.
4900	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4900 KILOVOLTAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4902
(MILLIAMPERES)	6310
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4874
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4856
MAXIMUM LEAKAGE (MILLIAMPERES)	4875
REMAIN WITHIN SPECIFED TOLERANCE.	4847
MAXIMUM RESISTANCE CHANGE (PERCENT)	1734
MAXIMUM RESISTANCE RATIO CHANGE (PERCENT)	2320
MAXIMUM CAPACITANCE CHANGE (PERCENT)	2322
MAXIMUM DISSIPATION FACTOR (PERCENT)	2324
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4861
PER MIL-STD-202, METHOD 301.	4862

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4902	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4902 AMPERE(S).
6310	THE SURGE CURRENT SHALL BE NOT GREATER THAN 6310 MILLIAMPERE(S).
4874	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.
4856	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4875	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4875 MILLIAMPERE(S).
4847	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1734	CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN PLUS OR MINUS 1734 PERCENT PLUS 0.01 OHM.
2320	THE CHANGE IN RESISTANCE RATIO SHALL BE NOT GREATER THAN 2320 PERCENT.
2322	THE CHANGE IN CAPACITANCE SHALL BE NOT GREATER THAN 2322 PERCENT.
2324	THE DISSIPATION FACTOR SHALL BE NOT GREATER THAN 2324 PERCENT.
4861	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861.
4862	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4854
(VOLTS, AC)	4855
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	4842
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	4848
BETWEEN MUTUALLY INSULATED PARTS.	4844
BETWEEN ALL INSULATED PARTS AND GROUND.	4845
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	4846
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4850
DURATION OF VOLTAGE APPLICATION (SECONDS)	4867
MOUNTING PER DOCUMENT (DOC DES)	5000
REGULATION OF TEST VOLTAGE (PERCENT)	4869
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4870
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4717
(MILLIAMPERES)	4897

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4854	TEST VOLTAGE SHALL BE 4854 VOLT(S), DC.
4855	TEST VOLTAGE SHALL BE 4855 VOLT(S), AC.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
4842	BETWEEN THE TERMINATION TIED TOGETHER AND THE MOUNTING HARDWARE.
4848	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
4844	BETWEEN MUTUALLY INSULATED PARTS.
4845	BETWEEN ALL INSULATED PARTS AND GROUND.
4846	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
4850	SPECIAL PREPARATION OR CONDITIONS SHALL BE IN ACCORDANCE WITH 4850.
4867	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4867 SECOND(S).
5000	MOUNTING SHALL BE IN ACCORDANCE WITH 5000.
4869	REGULATION OF TEST VOLTAGE SHALL BE WITHIN 4869 PERCENT.
4870	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4870 KILOVOLTAMPERE(S).
4717	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4717 AMPERE(S).
4897	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4897 MILLIAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
METHOD OF VOLTAGE CONNECTION PER DOCUMENT (DOC DES)	6267
DISSIPATION FACTOR	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT____	1736
MAXIMUM DISSIPATION FACTOR (PERCENT)	1738
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT____	1894
AS FOLLOWS:	1896
TEST FREQUENCY (SELECT ONE)	
(HERTZ)	1898
(MEGAHERTZ)	1910
TEST TEMPERATURE (DEGREES CELSIUS)	1900
MAXIMUM TEST VOLTAGE (VOLTS, RMS)	1902
POLARIZING VOLTAGE (VOLTS, DC)	1904
TEST EQUIPMENT ACCURACY (PERCENT)	1906
TEST VOLTAGE (VOLTS)	1908

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currenversion before use.

CHAR CODE	STANDARD PARAGRAPH
6267	METHOD OF CONNECTION OF TEST VOLTAGE SHALL BE IN ACCORDANCE WITH 6267.
1736	DISSIPATION FACTOR. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1736.
1738	DISSIPATION FACTOR. THE DISSIPATION FACTOR SHALL BE NOT GREATER THAN 1738 PERCENT.
1894	DISSIPATION FACTOR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1894.
1896	DISSIPATION FACTOR. TESTING SHALL BE PERFORMED AS FOLLOWS:
1898	TESTING SHALL BE PERFORMED AT A FREQUENCY OF 1898 HERTZ.
1910	TESTING SHALL BE PERFORMED AT A FREQUENCY OF 1910 MEGAHERTZ.
1900	THE TEST TEMPERATURE SHALL BE 1900 DEGREES CELSIUS.
1902	THE TEST VOLTAGE SHALL BE NOT GREATER THAN 1902 VOLT(S) RMS.
1904	THE POLARIZING VOLTAGE SHALL BE 1904 VOLT(S) DC.
1906	THE EQUIPMENT MEASURING ACCURACY SHALL BE WITHIN 1906 PERCENT.
1908	THE TEST VOLTAGE SHALL BE 1908 VOLT(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4760
FUNGUS RESISTANT BY CERTIFICATION OR BY TEST.	4761
NO EVIDENCE OF FUNGUS GROWTH WHEN TESTED.	4762
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4754
PER MIL-STD-810, METHOD 508.	4755
TEST PERIOD (DAYS)	4756
HIGH TEMPERATURE EXPOSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1758
NO EVIDENCE OF PHYSICAL DAMAGE	1760
MAXIMUM RESISTANCE CHANGE (PERCENT)	1764
MAXIMUM RESISTANCE RATIO CHANGE (PERCENT)	1770
MAXIMUM CAPACITANCE CHANGE (PERCENT)	1772

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4760	FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.
4761	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED, THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4762	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4754	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.
4755	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.
4756	TEST PERIOD SHALL BE 4756 DAY(S).
1758	HIGH TEMPERATURE EXPOSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT EXCEPT, 1758.
1760	HIGH TEMPERATURE EXPOSURE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1764	THE CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN PLUS OR MINUS 1764 PERCENT PLUS 0.01 OHM.
1770	THE CHANGE IN RESISTANCE RATIO SHALL BE NOT GREATER THAN 1770.
1772	THE CHANGE IN CAPACITANCE SHALL BE NOT GREATER THAN 1772 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM DISSIPATION FACTOR (PERCENT)	1774
REMAIN WITHIN SPECIFIED TOLERANCE.	1762
MINIMUM INSULATION RESISTANCE (MEGOHMS)	1766
NO EVIDENCE OF DIELECTRIC BREAKDOWN.	1768
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1742
AS FOLLOWS:	1740
TEST TEMPERATURE (DEGREES CELSIUS)	1744
EXPOSURE DURATION (HOURS)	1750
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1380
AS FOLLOWS:	6359
*MINIMUM INSULATION RESISTANCE (SELECT ONE)	
SINGLE TEST	
(MEGOHMS)	1386

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1774	THE DISSIPATION FACTOR SHALL BE NOT GREATER THAN 1774 PERCENT.
1762	THE DEVICE SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1766	THE NETWORK INSULATION RESISTANCE SHALL BE NOT LESS THAN 1766 MEGOHM(S).
1768	THERE SHALL BE NO EVIDENCE OF FLASHOVER, ARCING, OR INSULATION BREAKDOWN WHEN THE DIELECTRIC WITHSTANDING VOLTAGE TEST IS PERFORMED.
1742	HIGH TEMPERATURE EXPOSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1742.
1740	HIGH TEMPERATURE EXPOSURE. TESTING SHALL BE PERFORMED AS FOLLOWS:
1744	TEST TEMPERATURE SHALL BE 1744 DEGREES CELSIUS.
1750	EXPOSURE DURATION SHALL BE 1750 HOUR(S).
1380	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.
6359	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE PERFORMED AS FOLLOWS:
1386	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1386 MEGOHM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	1384
*SECOND TEST (MEGOHMS)	1387
REMAIN WITHIN SPECIFIED TOLERANCE.	1388
NO EVIDENCE OF PHYSICAL DAMAGE.	1407
MAXIMUM RESISTANCE CHANGE (PERCENT)	1784
MAXIMUM RESISTANCE RATIO CHANGE (PERCENT)	2330
MAXIMUM CAPACITANCE CHANGE (PERCENT)	2332
MAXIMUM DISSIPATION FACTOR (PERCENT)	2334
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1371
PER MIL-STD-202, METHOD 302.	1511
*CONDITION (SELECT ONE)	
TEST CONDITION (LETTER)	1378
TEST VOLTAGE (VOLTS, DC)	1373
ELECTRIFICATION TIME (SECONDS)	1376
MAXIMUM MEASUREMENT ERROR AT REQUIRED VALUE (PERCENT)	1377

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1384	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1384 MEGOHM(S) AT THE FIRST TEST TEMPERATURE.
1387	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1387 MEGOHM(S) AT THE SECOND TEST TEMPERATURE.
1388	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1407	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1784	CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN PLUS OR MINUS 1784 PERCENT 0.01 OHM.
2330	THE CHANGE IN RESISTANCE RATIO SHALL NOT GREATER THAN 2330 PERCENT.
2332	THE CHANGE IN CAPACITANCE SHALL BE NOT GREATER THAN 2332 PERCENT.
2334	THE DISSIPATION FACTOR SHALL BE NOT GREATER THAN 2334 PERCENT.
1371	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.
1511	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 302 OF MIL-STD-202.
1378	TEST CONDITION LETTER 1378 SHALL APPLY.
1373	TEST POTENTIAL SHALL BE 1373 VOLT(S), DC.
1376	ELECTRIFICATION DURATION SHALL BE 1376 SECOND(S).
1377	THE MEASUREMENT ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1377 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
POINTS OF MEASUREMENT:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	1497
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	1498
BETWEEN MUTUALLY INSULATED PARTS.	1522
BETWEEN INSULATED PARTS AND GROUND.	1523
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	1524
SPECIAL PREPARATIONS OR CONDITIONS PER DOCUMENT (DOC DES)	1520
FIRST TEST TEMPERATURE (DEGREES CELSIUS)	1372
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	1381
LOW TEMPERATURE OPERATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1814
NO EVIDENCE OF PHYSICAL DAMAGE.	1816
MAXIMUM RESISTANCE CHANGE (PERCENT)	1820
MAXIMUM RESISTANCE RATIO CHANGE (PERCENT)	1822
MAXIMUM CAPACITANCE CHANGE (PERCENT)	1824

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	POINTS OF INSULATION RESISTANCE MEASUREMENT SHALL BE AS FOLLOWS:
1497	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
1498	BETWEEN THE TERMINATION TIED TOGETHER AND THE CASE.
1522	BETWEEN MUTUALLY INSULATED PARTS.
1523	BETWEEN ALL INSULATED PARTS AND GROUND.
1524	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
1520	SPECIAL PREPARATIONS OR CONDITIONS SHALL BE IN ACCORDANCE WITH 1520.
1372	FIRST TEST TEMPERATURE SHALL BE 1372 DEGREES CELSIUS.
1381	SECOND TEST TEMPERATURE SHALL BE 1381 DEGREES CELSIUS.
1814	LOW TEMPERATURE OPERATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1814.
1816	LOW TEMPERATURE OPERATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1820	THE CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN PLUS OR MINUS 1820 PERCENT PLUS 0.01 OHM.
1822	THE CHANGE IN RESISTANCE RATIO SHALL BE NOT GREATER THAN 1822 PERCENT.
1824	THE CHANGE IN CAPACTIANCE SHALL BE NOT GREATER THAN 1824 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM DISSIPATION FACTOR (PERCENT)	1826
REMAIN WITHIN SPECIFIED TOLERANCE.	1818
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1792
AS FOLLOWS:	1790
TEST TEMPERATURE (DEGREES CELSIUS)	1794
APPLIED VOLTAGE (PERCENT RATED)	1800
OPERATION DURATION (HOURS)	1802
EXPOSURE DURATION (HOURS).	1804
PREPARATION. TEMPERATURE STABILIZATION DURATION (HOURS)	1806
ROOM TEMPERATURE. DURATION BEFORE FINAL MEASUREMENTS (HOURS)	1808
LOW TEMPERATURE STORAGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1846
NO EVIDENCE OF PHYSICAL DAMAGE.	1848
MAXIMUM RESISTANCE CHANGE (PERCENT)	1852
MAXIMUM RESISTANCE RATIO CHANGE (PERCENT)	1828

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1826	THE DISSIPATION FACTOR SHALL BE NOT GREATER THAN 1826 PERCENT.
1818	THE DEVICE SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1792	LOW TEMPERATURE OPERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1792.
1790	LOW TEMPERATURE OPERATION. TESTING SHALL BE PERFORMED AS FOLLOWS:
1794	TEST TEMPERATURE SHALL BE 1794 DEGREES CELSIUS.
1800	APPLIED VOLTAGE SHALL BE 1800 PERCENT OF RATED VOLTAGE.
1802	OPERATION DURATION SHALL BE 1802 HOUR(S).
1804	EXPOSURE DURATION SHALL BE 1804 HOUR(S).
1806	NETWORKS SHALL STABILIZE AT TEMPERATURE FOR 1806 HOUR(S) PRIOR TO VOLTAGE APPLICATION.
1808	NETWORKS SHALL STABILIZE AT ROOM TEMPERATURE FOR 1808 HOUR(S) BEFORE FINAL MEASUREMENT(S).
1846	LOW TEMPERATURE STORAGE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1846.
1848	LOW TEMPERATURE STORAGE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1852	THE CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN PLUS OR MINUS 1852 PERCENT PLUS 0.01 OHM.
1828	THE CHANGE IN RESISTANCE RATIO SHALL BE NOT GREATER THAN 1828 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM CAPACITANCE CHANGE (PERCENT)	1830
MAXIMUM DISSIPATION FACTOR (PERCENT)	1854
REMAIN WITHIN SPECIFIED TOLERANCE.	1850
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1832
AS FOLLOWS:	1842
TEST TEMPERATURE (DEGREES CELSIUS)	1834
EXPOSURE DURATION (HOURS)	1840
ROOM TEMPERATURE DURATION BEFORE FINAL MEASUREMENTS (HOURS)	1844
MOISTURE RESISTANCE.	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1400
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	1396
REMAIN WITHIN SPECIFIED TOLERANCE.	1398
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DMV APPLIED.	1394
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	1429

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1830	THE CHANGE IN CAPACITANCE SHALL BE NOT GREATER THAN 1830 PERCENT.
1854	THE DISSIPATION FACTOR SHALL BE NOT GREATER THAN 1854 PERCENT.
1850	THE DEVICE SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1832	LOW TEMPERATURE STORAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1832.
1842	LOW TEMPERATURE STORAGE. TESTING SHALL BE PERFORMED AS FOLLOWS:
1834	TEST TEMPERATURE SHALL BE 1834 DEGREES CELSIUS.
1840	EXPOSURE DURATION SHALL BE 1840 HOUR(S).
1844	NETWORKS SHALL STABILIZE AT ROOM TEMPERATURE FOR 1844 HOUR(S) BEFORE FINAL MEASUREMENT(S).
1400	MOISTURE RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1400.
1396	MOISTURE RESISTANCE. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
1398	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1394	THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN, WHEN DIELECTRIC WITHSTANDING VOLTAGE IS APPLIED.
1429	CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1429 MILLIAMPERE(S) AT HIGH HUMIDITY.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	1404
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	1432
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	1406
MAXIMUM RESISTANCE CHANGE (PERCENT)	1858
MAXIMUM RESISTANCE RATIO CHANGE (PERCENT)	2340
MAXIMUM CAPACITANCE CHANGE (PERCENT)	2342
MAXIMUM DISSIPATION FACTOR (PERCENT)	2344
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1391
PER MIL-STD-202, METHOD 106.	1397
POLARIZING VOLTAGE (VOLTS, DC)	1395
LOADING VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4981
(VOLTS, AC)	4980
PERCENT OF SAMPLE SUBJECTED TO POLARIZING VOLTAGE (PERCENT)	4991
STEP 7A NOT APPLICABLE.	4985

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1404	CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1404 MILLIAMPERE(S) AFTER DRYING.
1432	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1432 MEGOHM(S) AT HIGH HUMIDITY.
1406	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1406 MEGOHM(S) AFTER DRYING.
1858	CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN PLUS OR MINUS 1858 PERCENT PLUS 0.01 OHM.
2340	THE CHANGE IN RESISTANCE RATIO SHALL BE NOT GREATER THAN 2340 PERCENT.
2342	THE CHANGE IN CAPACITANCE SHALL BE NOT GREATER THAN 2342 PERCENT.
2344	THE DISSIPATION FACTOR SHALL BE NOT GREATER THAN 2344 PERCENT.
1391	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1391.
1397	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 106 OF MIL-STD-202.
1395	POLARIZING VOLTAGE SHALL BE 1395 VOLT(S), DC.
4981	LOADING VOLTAGE SHALL BE 4981 VOLT(S), DC.
4980	LOADING VOLTAGE SHALL BE 4980 VOLT(S), AC.
4991	4991 PERCENT OF THE SAMPLE SHALL BE SUBJECTED TO THE POLARIZING VOLTAGE.
4985	STEP 7A OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STEP 7B NOT APPLICABLE.	4986
MOUNT PER DOCUMENT (DOC DES)	1449
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	4983
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	4984
NOISE INDEX	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1890
MAXIMUM (DECIBELS)	1892
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1862
PER MIL-STD-202, METHOD 308.	1864
TEST TEMPERATURE (DEGREES CELSIUS)	1866
TEST VOLTAGE (VOLTS DC)	1870
ISOLATION RESISTOR (SELECT ONE)	
1 KILOHM.	1872
10 KILOHMS.	1874
100 KILOHMS.	1876
1 MEGOHM.	1878

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4986	STEP 7B OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
1449	MOUNTING SHALL BE IN ACCORDANCE WITH 1449.
4983	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.
4984	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.
1890	NOISE INDEX. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1890.
1892	NOISE INDEX. THE NOISE INDEX SHALL BE NOT GREATER THAN 1892 DECIBEL(S).
1862	NOISE INDEX. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1862.
1864	NOISE INDEX. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 308 OF MIL-STD-202.
1866	TEST TEMPERATURE SHALL BE 1866 DEGREES CELSIUS.
1870	THE APPLIED VOLTAGE SHALL BE 1870 VOLT(S), DC.
1872	THE ISOLATION RESISTOR SHALL BE 1 KILOHM.
1874	THE ISOLATION RESISTOR SHALL BE 10 KILOHMS.
1876	THE ISOLATION RESISTOR SHALL BE 100 KILOHMS.
1878	THE ISOLATION RESISTOR SHALL BE 1 MEGOHM.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RELIABILITY SCREENING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6929
NO EVIDENCE OF PHYSICAL DAMAGE.	6930
REMAIN WITHIN SPECIFIED TOLERANCE.	6937
MAXIMUM RESISTANCE CHANGE (PERCENT)	1920
MAXIMUM RESISTANCE RATIO CHANGE (PERCENT)	1922
MAXIMUM CAPACITANCE CHANGE (PERCENT)	1924
MAXIMUM DISSIPATION FACTOR (PERCENT)	1926
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6696
PER MIL-STD-202, METHOD 108.	6697
*DURATION (SELECT ONE)	
TEST CONDITION (LETTER)	6698
(HOURS)	6699

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6929	RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION LOAD LIFE, OVERLOAD). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6929.
6930	RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION LOAD LIFE, OVERLOAD). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6937	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1920	CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN PLUS OR MINUS 1920 PERCENT PLUS 0.01 OHM.
1922	THE CHANGE IN RESISTANCE RATIO SHALL BE NOT GREATER THAN 1922 PERCENT.
1924	THE CHANGE IN CAPACITANCE SHALL BE NOT GREATER THAN 1924 PERCENT.
1926	THE DISSIPATION FACTOR SHALL BE NOT GREATER THAN 1926 PERCENT.
6696	RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION LOAD LIFE, OVERLOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6696.
6697	RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION LOAD LIFE, OVERLOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 108 OF MIL-STD-202.
6698	TEST CONDITION LETTER 6698 SHALL APPLY.
6699	DURATION OF THE TEST SHALL BE 6699 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*DUTY CYCLE (SELECT ONE)	
1.5 HOURS ON AND 0.5 HOUR OFF.	6710
STEADY STATE.	6713
*TEST TEMPERATURE (DEGREES CELSIUS)	6700
*TOLERANCE (DEGREES CELSIUS)	6701
STILL AIR REQUIRED.	6923
POWER APPLIED TIMES RATED POWER (NUMBER)	6921
MAXIMUM VOLTAGE (VOLTS)	6939
TEST POTENTIAL (SELECT ONE)	
(VOLTS, AC)	6706
(VOLTS, DC)	6707
ELECTRICAL LOAD (OHMS)	6920
MEASUREMENT INTERVALS (HOURS)	6922
MOUNT PER DOCUMENT (DOC DES)	6924
RESISTANCE-TEMPERATURE CHARACTERISTIC	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1608
AS FOLLOWS:	1602

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6710	DUTY CYCLE SHALL BE ONE AND ONE-HALF HOURS ON AND ONE-HALF HOUR OFF.
6713	DUTY CYCLE SHALL BE STEADY STATE.
6700	TEST TEMPERATURE SHALL BE 6700 DEGREES CELSIUS.
6701	TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 6701 DEGREES CELSIUS.
6923	TEST CHAMBER SHALL HAVE STILL AIR.
6921	ITEM(S) SHALL BE TESTED AT 6921 TIMES THE RATED POWER.
6939	APPLIED VOLTAGE SHALL BE NOT GREATER THAN 6939 VOLT(S).
6706	TEST POTENTIAL SHALL BE 6706 VOLT(S), AC.
6707	TEST POTENTIAL SHALL BE 6707 VOLT(S) DC.
6920	THE ELECTRICAL LOAD SHALL BE 6920 OHM(S).
6922	MEASUREMENTS SHALL BE TAKEN AT 6922 HOUR INTERVALS DURING THE TEST.
6924	MOUNTING SHALL BE IN ACCORDANCE WITH 6924.
1608	RESISTANCE-TEMPERATURE CHARACTERISTIC. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1608.
1602	RESISTANCE-TEMPERATURE CHARACTERISTIC. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
REFERENCED (PPM/DEGREES CELSIUS)	1604
OVER TEMPERATURE RANGE (PERCENT)	1606
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1962
PER MIL-STD-202, METHOD 304.	1964
TEST TEMPERATURE PER MEASUREMENT TEMPERATURE TABLE	
TEMPERATURE TOLERANCE (+OR- DEGREE CELSIUS)	1966

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
1604	THE RESISTANCE-TEMPERATURE CHARACTERISTIC SHALL BE NOT GREATER THAN 1604 PPM/DEGREE CELSIUS WHEN REFERENCED TO THE RESISTANCE READING AT 25 DEGREES CELSIUS.
1606	THE RESISTANCE-TEMPERATURE CHARACTERISTIC SHALL BE NOT GREATER THAN 1606 PERCENT OVER THE OPERATING TEMPERATURE RANGE.
1962	RESISTANCE-TEMPERATURE CHARACTERISTIC. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1962.
1964	RESISTANCE-TEMPERATURE CHARACTERISTIC. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 304 OF MIL-STD-202.
	MEASUREMENTS SHALL BE MADE AT THE TEMPERATURE SPECIFIED IN THE MEASUREMENT TABLE.

MEASUREMENT TEMPERATURE TABLE

TEMPERATURE DEGREES CELSIUS
25 (REFERENCE TEMPERATURE)
2221
2222
2223
2224
2225
2226
2227
2228
2229

1966 THE MEASUREMENT TEMPERATURE TOLERANCE SHALL BE +OR- 1966 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO SOLDERING HEAT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4700
NO EVIDENCE OF PHYSICAL DAMAGE.	4701
REMAIN WITHIN SPECIFIED TOLERANCE.	4718
MAXIMUM RESISTANCE CHANGE (PERCENT)	1980
MAXIMUM RESISTANCE RATIO CHANGE (PERCENT)	2350
MAXIMUM CAPACITANCE CHANGE (PERCENT)	2352
MAXIMUM DISSIPATION FACTOR (PERCENT)	2354
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4689
PER MIL-STD-202, METHOD 210.	4698
*TEST CONDITION (LETTER)	4691
NUMBER OF TERMINATIONS TESTED (QUANTITY)	4694
DEPTH OF IMMERSION IN SOLDER (SELECT ONE)	
(INCHES)	4692
(MILLIMETERS)	4669

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4700	RESISTANCE TO SOLDERING HEAT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4700.
4701	RESISTANCE TO SOLDERING HEAT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4718	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1980	CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN PLUS OR MINUS 1980 PERCENT PLUS 0.01 OHM.
2350	THE CHANGE IN RESISTANCE RATIO SHALL BE NOT GREATER THAN 2350 PERCENT.
2352	THE CHANGE IN CAPACITANCE SHALL BE NOT GREATER THAN 2352 PERCENT.
2354	THE DISSIPATION FACTOR SHALL BE NOT GREATER THAN 2354 PERCENT.
4689	RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4689.
4698	RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 210 OF MIL-STD-202.
4691	TEST CONDITION LETTER 4691 SHALL APPLY.
4694	4694 TERMINATION(S) PER UNIT SHALL BE TESTED.
4692	DEPTH OF IMMERSION IN SOLDER SHALL BE 4692 INCH(S).
4669	DEPTH OF IMMERSION IN SOLDER SHALL BE 4669 MILLIMETER(S)

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMMERSION IN FLUX PERMITTED.	4671
SPECIAL PREPARATIONS PERMITTED.	4989
COOLING TIME (MINUTES)	4695
RESISTANCE TO SOLVENTS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4834
NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.	4830
MARKING SHALL REMAIN LEGIBLE.	4836
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4829
PER MIL-STD-202, METHOD 215.	4839
SOLVENTS TO BE ADDED (NAME)	4838
SOLVENTS TO BE DELETED (SUBPARAGRAPH LETTER)	4835
BRUSHED AREA (SELECT ONE)	
BRUSH MARKING AREA.	4831
ALL OF SPECIMEN TO BE BRUSHED.	6279

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4671	IMMERSION OF TERMINATION IN FLUX SHALL BE PERMITTED.
4989	SPECIAL PREPARATION SHALL BE PERMITTED.
4695	COOLING TIME SHALL BE 4695 MINUTE(S) PRIOR TO FINAL EXAMINATION AND MEASUREMENTS.
4834	RESISTANCE TO SOLVENTS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4834.
4830	RESISTANCE TO SOLVENTS. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
4836	MARKING SHALL REMAIN LEGIBLE.
4829	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4829.
4839	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE METHOD 215 OF MIL-STD-202. THE SPECIMENS SHALL BE DIVIDED INTO GROUPS OF EQUAL NUMBER TO THE EXTENT POSSIBLE.
4838	IN ADDITION TO THE SPECIFIED SOLVENT(S) 4838 SHALL ALSO BE USED.
4835	BRUSHING SHALL BE PERFORMED WITH THE SOLVENTS IN ACCORDANCE WITH METHOD 215 OF MIL-STD-202, EXCEPT THAT SOLUTION(S) 4835 SHALL NOT BE USED.
4831	THE MARKING AREA SHALL BE BRUSHED.
6279	THE ENTIRE SURFACE SHALL BE BRUSHED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT SPRAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4878
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE.	4782
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4770
PER MIL-STD-202, METHOD 101.	4771
*TEST CONDITION (LETTER)	4772
MOUNTING (SELECT ONE)	
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4773
MOUNTING SHALL BE BY NORMAL METHOD.	4765
MOUNTING SHALL BE BY ANY SUITABLE METHOD.	4766
SEAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4745
AS FOLLOWS:	6370
SPECIFIED TEST METHOD SENSITIVITY.	4746

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4878	SALT SPRAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4878.
4782	SALT SPRAY. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
4770	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4770.
4771	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 101 OF MIL-STD-202.
4772	TEST CONDITION LETTER 4772 SHALL APPLY.
4773	MOUNTING SHALL BE IN ACCORDANCE WITH 4773.
4765	MOUNTING SHALL BE BY THE NORMAL METHOD.
4766	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4745	SEAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4745.
6370	SEAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
4746	THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE SPECIFIED TEST SENSITIVITY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NO BUBBLES INDICATIVE OF LEAKAGE.	4748
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4734
PER MIL-STD-202, METHOD 112.	4732
*TEST CONDITION (LETTER)	
LETTER A.	4737
LIQUID FOR BATH (NAME)	4738
MINIMUM BATH TEMPERATURE (DEGREES CELSIUS)	4739
LETTER B.	6320
LIQUID FOR BATH (NAME)	6321
MINIMUM BATH TEMPERATURE (DEGREES CELSIUS)	6322
LETTER C.	6323
*LEAK RATE SENSITIVITY (ATM CC/SEC)	4741
*TEST PROCEDURE (SELECT ONE)	
TEST PROCEDURE I.	4740

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4748	THERE SHALL BE NO BUBBLES INDICATIVE OF LEAKAGE.
4734	SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4734.
4732	SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 112 OF MIL-STD-202.
4737	TEST CONDITION LETTER A SHALL APPLY.
4738	LIQUID FOR BUBBLE TEST BATH SHALL BE 4738.
4739	TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 4739 DEGREES CELSIUS.
6320	TEST CONDITION LETTER B SHALL APPLY.
6321	LIQUID FOR BUBBLE TEST BATH SHALL BE 6321.
6322	TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 6322 DEGREES CELSIUS.
6323	TEST CONDITION LETTER C SHALL APPLY.
4741	LEAK SENSITIVITY RATE SHALL BE 4741 ATM CC/SEC.
4740	PROCEDURE NUMBER I SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VACUUM PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	4742
(KILOPASCALS)	4736
TEST PROCEDURE II.	6324
BACKFILL PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	6325
(KILOPASCALS)	6326
NUMBER OF PRESSURE CYCLES (QUANTITY)	4749
TEST PROCEDURE III.	6328
GROSS LEAK TEST CONDITION (LETTER)	4750
TEST PROCEDURE IV.	6329
CHAMBER PRESSURE (SELECT ONE)	
(TORR)	1854
(KILOPASCALS)	4735
DURATION OF REDUCED PRESSURE (MINUTES)	4752
GROSS LEAK TEST CONDITION (LETTER)	6330
LETTER D.	6331
ANY SUITABLE MOUNTING METHOD.	4743
LETTER E.	6332
ANY SUITABLE MOUNTING METHOD.	6333

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4742	VACUUM PRESSURE SHALL BE 4742 POUNDS PER SQUARE INCH.
4736	VACUUM PRESSURE SHALL BE 4736 KILOPASCALS.
6324	PROCEDURE NUMBER II SHALL APPLY.
6325	BACKFILL PRESSURE SHALL BE 6325 POUNDS PER SQUARE INCH.
6326	BACKFILL PRESSURE SHALL BE 6326 KILOPASCALS.
4749	THERE SHALL BE 4749 PRESSURE CYCLE(S).
6328	PROCEDURE NUMBER III SHALL APPLY.
4750	GROSS LEAK TEST CONDITION LETTER 4750 SHALL APPLY.
6329	PROCEDURE NUMBER IV SHALL APPLY.
4751	CHAMBER PRESSURE SHALL BE 4751 TORR.
4735	CHAMBER PRESSURE SHALL BE 4735 KILOPASCALS.
4752	DURATION AT LOW PRESSURE SHALL BE 4752 MINUTE(S).
6330	GROSS LEAK TEST CONDITION LETTER 6330 SHALL APPLY.
6331	TEST CONDITION LETTER D SHALL APPLY.
4743	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
6332	TEST CONDITION LETTER E SHALL APPLY.
6333	MOUNTING SHALL BE BY ANY SUITABLE METHOD.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, SPECIFIED PULSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1508
NO EVIDENCE OF PHYSICAL DAMAGE.	1509
NO DISCONTINUITY DURING TEST.	1471
REMAIN WITHIN SPECIFIED TOLERANCE.	4703
MAXIMUM RESISTANCE CHANGE (PERCENT)	1996
MAXIMUM RESISTANCE RATIO (PERCENT)	2370
MAXIMUM CAPACITANCE CHANGE (PERCENT)	2374
MAXIMUM DISSIPATION FACTOR (PERCENT)	2374
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1502
PER MIL-STD-202, METHOD 213.	1500
*TEST CONDITION (LETTER)	1504
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	4686
NORMAL MOUNTING METHOD.	4685
MOUNT PER DOCUMENT (DOC DES)	4684

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1508	SHOCK, SPECIFIED PULSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1508.
1509	SHOCK, SPECIFIED PULSE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1471	THERE SHALL BE NO DISCONTINUITY DURING THE TEST.
4703	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1996	CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN PLUS OR MINUS 1996 PERCENT PLUS 0.01 OHM.
2370	THE CHANGE IN RESISTANCE RATIO SHALL BE NOT GREATER THAN 2370 PERCENT.
2372	THE CHANGE IN CAPACITANCE SHALL BE NOT GREATER THAN 2372 PERCENT.
2374	THE DISSIPATION FACTOR SHALL BE NOT GREATER THAN 2374 PERCENT.
1502	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1502.
1500	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 213 OF MIL-STD-202.
1504	TEST CONDITION LETTER 1504 SHALL APPLY.
4686	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4685	MOUNTING SHALL BE BY THE NORMAL METHOD.
4684	MOUNTING SHALL BE IN ACCORDANCE WITH 4684.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHORT-TIME OVERLOAD	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2036
NO EVIDENCE OF PHYSICAL DAMAGE.	2038
MAXIMUM RESISTANCE CHANGE (PERCENT)	2042
MAXIMUM RESISTANCE RATIO (PERCENT)	2046
MAXIMUM CAPACITANCE CHANGE (PERCENT)	2048
MAXIMUM DISSIPATION FACTOR (PERCENT)	2050
REMAIN WITHIN SPECIFIED TOLERANCE.	2040
NO EVIDENCE OF FLAMING.	2044
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2002
AS FOLLOWS:	2022
OVERLOAD DURATION (SECONDS)	2004
APPLIED VOLTAGE (TIMES RATED)	2010
MAXIMUM VOLTAGE (VOLTS)	2012
APPLIED POWER (TIMES RATED)	2008
TEST TEMPERATURE (DEGREES CELSIUS)	2014

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2036	SHORT-TIME OVERLOAD. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2036.
2038	SHORT-TIME OVERLOAD. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2042	CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN PLUS OR MINUS 2042 PERCENT PLUS 0.01 OHM.
2046	THE CHANGE IN RESISTANCE RATIO SHALL BE NOT GREATER THAN 2046 PERCENT.
2048	THE CHANGE IN CAPACITANCE SHALL BE NOT GREATER THAN 2048 PERCENT.
2050	THE DISSIPATION FACTOR SHALL BE NOT GREATER THAN 2050 PERCENT.
2040	THE DEVICE SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
2044	THERE SHALL BE NO EVIDENCE OF VISIBLE FLAMING.
2002	SHORT-TIME OVERLOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2002.
2022	SHORT-TIME OVERLOAD. TESTING SHALL BE PERFORMED AS FOLLOWS:
2004	THE DURATION OF THE OVERLOAD SHALL BE 2004 SECOND(S).
2010	THE VOLTAGE APPLIED SHALL BE 2010 TIMES RATED VOLTAGE.
2012	APPLIED VOLTAGE SHALL BE NOT GREATER THAN 2012 VOLT(S).
2008	THE POWER APPLIED SHALL BE 2008 TIMES RATED POWER.
2014	THE TEST TEMPERATURE SHALL BE 2014 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOUNTING PER MIL-R-83401.	2020
MEASUREMENTS WITHIN (MINUTES)	2024
SOLDERABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4674
NO EVIDENCE OF PHYSICAL DAMAGE.	4675
MEET EVALUATION CRITERIA SPECIFIED IN METHOD 208 OF MIL-STD-202.	4672
REMAIN WITHIN SPECIFIED TOLERANCE.	4677
MAXIMUM RESISTANCE CHANGE (PERCENT)	2060
MAXIMUM RESISTANCE RATIO (PERCENT)	2380
MAXIMUM CAPACITANCE CHANGE (PERCENT)	2382
MAXIMUM DISSIPATION FACTOR (PERCENT)	2384
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4662
PER MIL-STD-202, METHOD 208.	4682
NUMBER OF TERMINALS TO BE TESTED (QUANTITY)	4666

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2020	MOUNTING SHALL BE IN ACCORDANCE WITH MIL-R-83401.
2024	FINAL RESISTANCE MEASUREMENT SHALL BE MADE 2024 MINUTE(S) AFTER REMOVAL OF TEST POTENTIAL.
4674	SOLDERABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4674.
4675	SOLDERABILITY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4672	THE RESULTS OF THE SOLDERABILITY TEST SHALL BE IN ACCORDANCE WITH THE ACCEPTANCE CRITERIA OF METHOD 208 OF MIL-STD-202.
4677	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
2060	CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN PLUS OR MINUS 2060 PERCENT PLUS 0.01 OHM.
2380	THE CHANGE IN RESISTANCE RATIO SHALL BE NO GREATER THAN 2380 PERCENT.
2382	THE CHANGE IN CAPACITANCE SHALL BE NOT GREATER THAN 2382 PERCENT.
2384	THE DISSIPATION FACTOR SHALL BE NOT GREATER THAN 2384 PERCENT.
4662	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4662.
4683	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 208 OF MIL-STD-202.
4666	4666 TERMINATION(S) PER UNIT SHALL BE TESTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DEPTH OF IMMERSION (SELECT ONE)	
(INCHES)	4667
(MILLIMETERS)	4663
DISTANCE WRAP WIRE APPLIED (SELECT ONE)	
(INCHES)	4664
(MILLIMETERS)	4665
SPECIAL PREPARATIONS PERMITTED.	6205
TERMINAL STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1418
NO EVIDENCE OF PHYSICAL DAMAGE.	1433
REMAIN WITHIN SPECIFIED TOLERANCE.	6296
MAXIMUM RESISTANCE CHANGE (PERCENT)	2090
MAXIMUM RESISTANCE RATIO (PERCENT)	2390
MAXIMUM CAPACITANCE CHANGE (PERCENT)	2392
MAXIMUM DISSIPATION FACTOR (PERCENT)	2394

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4667	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4667 INCH(S).
4663	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4663 MILLIMETER(S).
4664	THE WRAP WIRE SHALL BE 4664 INCH(S) FROM THE BODY.
4665	THE WRAP WIRE SHALL BE 4665 MILLIMETER(S) FROM THE BODY.
6205	SPECIAL PREPARATION SHALL BE PERMITTED.
1418	TERMINAL STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1418.
1433	TERMINAL STRENGTH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6296	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
2090	CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN PLUS OR MINUS 2090 PERCENT PLUS 0.01 OHM.
2390	THE CHANGE IN RESISTANCE RATIO SHALL BE NOT GREATER THAN 2390 PERCENT.
2392	THE CHANGE IN CAPACITANCE SHALL BE NOT GREATER THAN 2048 PERCENT.
2394	THE DISSIPATION FACTOR SHALL BE NOT GREATER THAN 2050 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1410
PER MIL-STD-202, METHOD 211.	1375
*TEST CONDITIONS	
TEST CONDITION A, APPLIED FORCE (SELECT ONE)	
(POUNDS)	1411
(NEWTONS)	1419
TEST CONDITION B, BENDS (NUMBER)	1412
TEST CONDITION C, LOAD (SELECT ONE)	
(POUNDS)	1413
(KILOGRAMS)	1420
TEST CONDITION D.	1414
TEST CONDITION E, TORQUE (SELECT ONE)	
(POUND-INCHES)	1416
(NEWTON METERS)	1421

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1410	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1410.
1375	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 211 OF MIL-STD-202.
1411	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE THE APPLIED FORCE SHALL BE 1411 POUND(S).
1419	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE THE APPLIED FORCE SHALL BE 1419 NEWTON(S).
1412	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION B. THE THE APPLIED FORCE SHALL BE 1412 BEND(S).
1413	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE THE APPLIED FORCE SHALL BE 1413 POUND(S).
1420	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE THE APPLIED FORCE SHALL BE 1420 KILOGRAM(S).
1414	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION D.
1416	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE THE APPLIED FORCE SHALL BE 1416 POUND-INCH(S).
1421	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE THE APPLIED FORCE SHALL BE 1421 NEWTON METER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THERMAL SHOCK (TEMPERATURE CYCLING)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4722
NO EVIDENCE OF PHYSICAL DAMAGE.	4723
REMAIN WITHIN SPECIFIED TOLERANCE.	4726
MAXIMUM RESISTANCE CHANGE (PERCENT)	2104
MAXIMUM RESISTANCE RATIO (PERCENT)	2400
MAXIMUM CAPACITANCE CHANGE (PERCENT)	2402
MAXIMUM DISSIPATION FACTOR (PERCENT)	2404
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4713
PER MIL-STD-202, METHOD 107.	4714
*TEST CONDITION (LETTER)	4715
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4719

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4722	THERMAL SHOCK (TEMPERATURE CYCLING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4722.
4723	THERMAL SHOCK (TEMPERATURE CYCLING). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4726	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
2104	CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN PLUS OR MINUS 2104 PERCENT PLUS 0.01 OHM.
2400	THE CHANGE IN RESISTANCE RATIO SHALL BE NOT GREATER THAN 2400 PERCENT.
2402	THE CHANGE IN CAPACITANCE SHALL BE NOT GREATER THAN 2402 PERCENT.
2404	THE DISSIPATION FACTOR SHALL BE NOT GREATER THAN 2404 PERCENT.
4713	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4713.
4714	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 107 OF MIL-STD-202.
4715	TEST CONDITION LETTER 4715 SHALL APPLY.
4719	MOUNTING SHALL BE IN ACCORDANCE WITH 4719.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, HIGH FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1455
NO EVIDENCE OF PHYSICAL DAMAGE.	1456
NO DISCONTINUITY DURING TEST.	1473
REMAIN WITHIN SPECIFIED TOLERANCE.	1469
MAXIMUM RESISTANCE CHANGE (PERCENT)	2124
MAXIMUM RESISTANCE RATIO (PERCENT)	2410
MAXIMUM CAPACITANCE CHANGE (PERCENT)	2412
MAXIMUM DISSIPATION FACTOR (PERCENT)	2414
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1446
PER MIL-STD-202, METHOD 204.	1447
*TEST CONDITION (LETTER)	1448
PERCENT RATED LOAD APPLIED (PERCENT)	6200
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4709
NORMAL MOUNTING METHOD.	4708

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1455	VIBRATION, HIGH FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1455.
1456	VIBRATION, HIGH FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1473	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1469	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
2124	CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN PLUS OR MINUS 2124 PERCENT PLUS 0.01 OHM.
2410	THE CHANGE IN RESISTANCE RATIO SHALL BE NOT GREATER THAN 2410 PERCENT.
2412	THE CHANGE IN CAPACITANCE SHALL BE NOT GREATER THAN 2412 PERCENT.
2414	THE DISSIPATION FACTOR SHALL BE NOT GREATER THAN 2414 PERCENT.
1446	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1446.
1447	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 204 OF MIL-STD-202.
1448	TEST CONDITION LETTER 1448 SHALL APPLY.
6200	THE LOAD SHALL BE 6200 PERCENT OF THE RATED LOAD.
4709	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4708	MOUNTING SHALL BE BY THE NORMAL METHOD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOUNT PER DOCUMENT (DOC DES)	4707
VIBRATION, LOW FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1475
NO EVIDENCE OF PHYSICAL DAMAGE.	1476
REMAIN WITHIN SPECIFIED TOLERANCE.	1480
NO DISCONTINUITY DURING TEST.	1490
MAXIMUM RESISTANCE CHANGE (PERCENT)	2140
MAXIMUM RESISTANCE RATIO (PERCENT)	2420
MAXIMUM CAPACITANCE CHANGE (PERCENT)	2422
MAXIMUM DISSIPATION FACTOR (PERCENT)	2424
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1466
PER MIL-STD-201, METHOD 204.	1467
DURATION OF VIBRATION PER AXIS (HOURS)	1470
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4731

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4707	MOUNTING SHALL BE IN ACCORDANCE WITH 4707.
1475	VIBRATION, LOW FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1475.
1476	VIBRATION, LOW FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1480	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1490	THERE SHALL BE NO DISCONTINUITY DURING TEST.
2140	CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN PLUS OR MINUS 2140 PERCENT PLUS 0.01 OHM.
2420	THE CHANGE IN RESISTANCE RATIO SHALL BE NOT GREATER THAN 2420 PERCENT.
2422	THE CHANGE IN CAPACITANCE SHALL BE NOT GREATER THAN 2422 PERCENT.
2424	THE DISSIPATION FACTOR SHALL BE NOT GREATER THAN 2424 PERCENT.
1466	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1466.
1467	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 201 OF MIL-STD-202.
1470	DURATION OF TEST SHALL BE 1470 HOUR(S) PER AXIS.
4731	MOUNTING SHALL BE BY ANY SUITABLE METHOD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NORMAL MOUNTING METHOD.	4730
MOUNT PER DOCUMENT (DOC DES)	4729
DIRECTION OF MOTION	
PARALLEL TO LONGITUDINAL AXIS.	1535
PERPENDICULAR TO LONGITUDINAL AXIS.	1536
ON THE CENTERLINE OF MOST SENSITIVE AXIS.	4979
90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.	4978
THREE MUTUALLY PERPENDICULAR DIRECTIONS.	1537
VIBRATION, RANDOM	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1435
NO EVIDENCE OF PHYSICAL DAMAGE.	1436
REMAIN WITHIN SPECIFIED TOLERANCE.	1538
MAXIMUM RESISTANCE CHANGE (PERCENT)	2150
MAXIMUM RESISTANCE RATIO (PERCENT)	2430
MAXIMUM CAPACITANCE CHANGE (PERCENT)	2432

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4730	MOUNTING SHALL BE BY THE NORMAL METHOD.
4729	MOUNTING SHALL BE IN ACCORDANCE WITH 4729.
1535	THE DIRECTION OF MOTION SHALL BE PARALLEL TO THE LONGITUDINAL AXIS.
1536	THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE LONGITUDINAL AXIS.
4979	THE DIRECTION OF MOTION SHALL BE PARALLEL ON THE CENTERLINE OF THE MOST SENSITIVE AXIS.
4978	THE DIRECTION OF MOTION SHALL BE 90 DEGREES FORM THE CENTERLINE OF THE MOST SENSITIVE AXIS.
1537	THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUALLY PERPENDICULAR DIRECTIONS.
1435	VIBRATION, RANDOM. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1435.
1436	VIBRATION, RANDOM. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1538	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
2150	CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN PLUS OR MINUS 2150 PERCENT PLUS 0.01 OHM.
2430	THE CHANGE IN RESISTANCE RATIO SHALL BE NOT GREATER THAN 2430 PERCENT.
2432	THE CHANGE IN CAPACITANCE SHALL BE NOT GREATER THAN 2432 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM DISSIPATION FACTOR (PERCENT)	2434
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1426
PER MIL-STD-201, METHOD 214.	1427
*TEST CONDITION (ROMAN NUMERAL AND LETTER)	1428
*DURATION OF APPLICATION (SELECT ONE)	
(MINUTES)	1438
(HOURS)	1431
MONITORING INSTRUMENTATION OF EXCITATION (SELECT ONE)	
ANY SUITABLE SYSTEM.	1452
CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.	1453
CALIBRATED OSCILLOSCOPE.	1459
NUMBER OF VIBRATION MONITORING TEST POINTS (QUANTITY)	1430
LOCATION OF MONITORING POINTS (SELECT ONE)	
ANY SUITABLE LOCATION.	1439
AS CLOSE AS PRACTICAL TO TEST SPECIMEN.	1462

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2434	THE DISSIPATION FACTOR SHALL BE NOT GREATER THAN 2434 PERCENT.
1426	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1426.
1427	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 214 OF MIL-STD-202.
1428	TEST CONDITION NUMBER AND LETTER 1428 SHALL APPLY.
1438	THE DURATION OF THE TEST SHALL BE 1438 MINUTE(S).
1431	THE DURATION OF THE TEST SHALL BE 1431 HOUR(S).
1452	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE ANY SUITABLE INSTRUMENTATION SYSTEM.
1453	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.
1459	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED OSCILLOSCOPE.
1430	THERE SHALL BE 1430 VIBRATION MONITORING POINT(S).
1439	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE ANY SUITABLE LOCATION.
1462	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE AS CLOSE AS PRACTICAL TO THE TEST SPECIMEN(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4977
NORMAL MOUNTING METHOD.	4976
MOUNT PER DOCUMENT (DOC DES)	4975
VOLTAGE COEFFICIENT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2188
MAXIMUM (PERCENT/VOLT)	2190
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____.	2172
PER MIL-STD-202, METHOD 309.	
*WORKING VOLTAGE (VOLTS DC)	2174

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4977	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4976	MOUNTING SHALL BE BY THE NORMAL METHOD.
4975	MOUNTING SHALL BE IN ACCORDANCE WITH 4975.
2188	VOLTAGE COEFFICIENT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2188.
2190	VOLTAGE COEFFICIENT. THE VOLTAGE COEFFICIENT SHALL BE NOT GREATER THAN 2190 PERCENT/VOLT.
2172	VOLTAGE COEFFICIENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2172.
2174	VOLTAGE COEFFICIENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 309 OF MIL-STD-202. THE CONTINUOUS WORKING VOLTAGE SHALL BE 2174 VOLT(S) DC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOUNTING HARDWARE (SEE TABLE VIII, MIL-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VIII IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995
DEFINITION OF HERMETIC SEALING	
NOTE: AUTOMATIC WHEN CODES ARE USED TO REQUIRE HERMETIC SEALING.	
APPLICABLE DOCUMENTS (SEE MIL-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE MIL-STD-35)	
PACKAGING (SEE MIL-STD-35)	
NOTES (SEE MIL-STD-35)	
NOMENCLATURE (SEE MIL-STD-35)	
SUPERSEDED DOCUMENTS (SEE MIL-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE MIL-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

DEFINITION OF HERMETIC SEALING. FOR THE PURPOSE OF THIS DOCUMENT, A HERMETICALLY-SEALED ITEM IS ONE IN WHICH THE ELEMENT IS CONTAINED WITHIN A SEALED ENCLOSURE OF CERAMIC, GLASS OR METAL, OR A COMBINATION THEREOF, WHERE SEALING IS ACCOMPLISHED BY MATERIAL FUSION, WELDING, BRAZING OR SOLDERING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory).

6.1 Intended Use. This standard part contains codes and paragraphs to be used to specify Resistors Networks with or without capacitors.

6.2 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

CONCLUDING MATERIAL

Review activities:
Army - AR, AT, CR, EA SL, TE TM

Preparing activity:
Army - MI

(Project EDS-A392)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INTENTIONALLY LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX A

ILLUSTRATIONS

10. GENERAL


10.1 Scope. This appendix contains illustrations applicable to this standard which may be used to slow configurations or schematics in a MSE. This appendix is not a mandatory part of the standard. The information contained herein is intended for guidance only.

20. Applicable documents. This section is not applicable to this appendix.


30. Utilization. When change to configuration in the base document is required enter the illustration number from this appendix with code 1009 on its SRS. If no suitable illustration is shown, send a dimensioned copy of required configuration with input and a illustration number will be assigned. Use code 4950 with illustration number for non-dimensioned input such as a schematic or send with input for illustration number assignment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX A

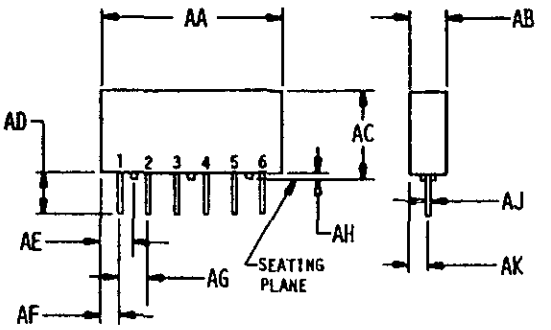


005-01-1

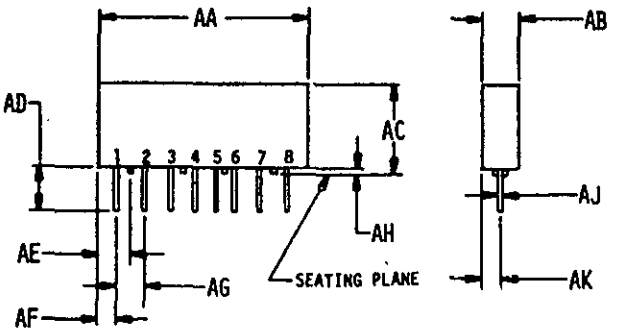

005-01-2

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.


APPENDIX A

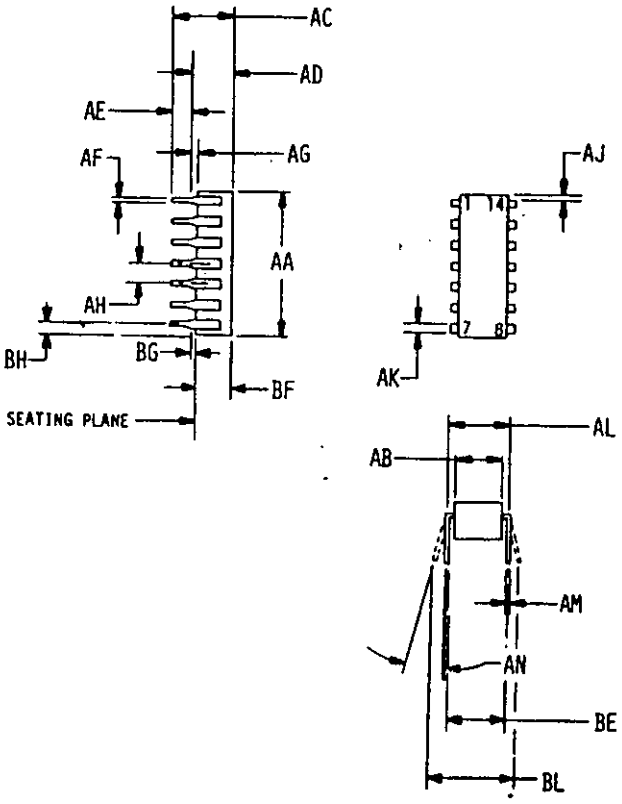

005-02-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.


APPENDIX A

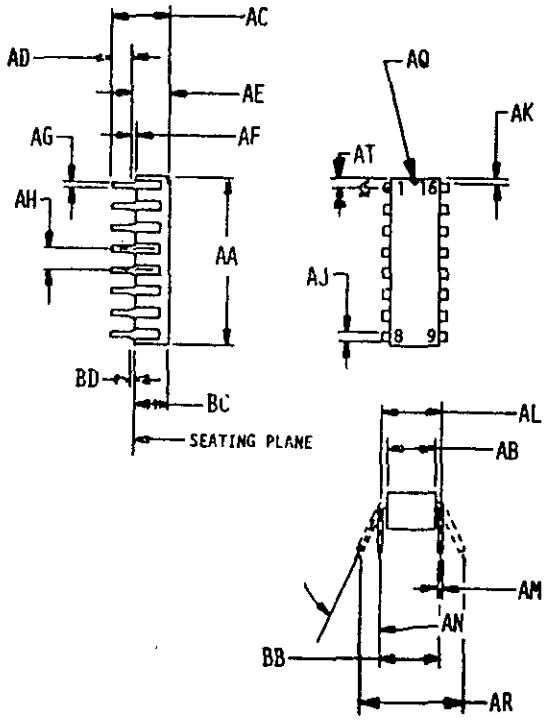


005-02-2

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX A

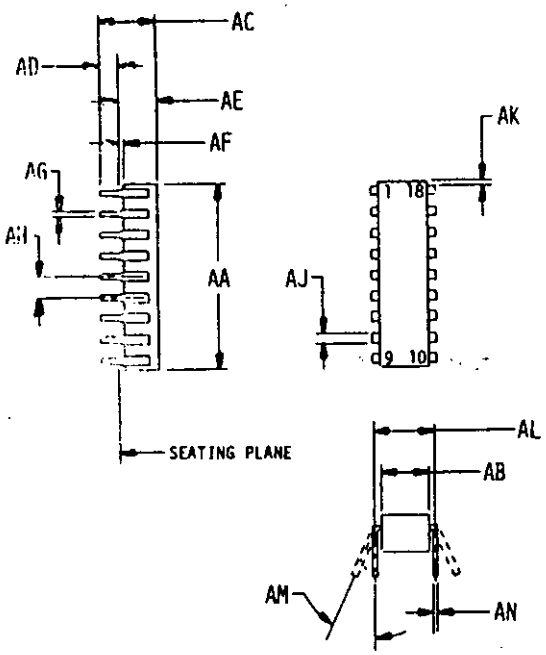


005-02-3

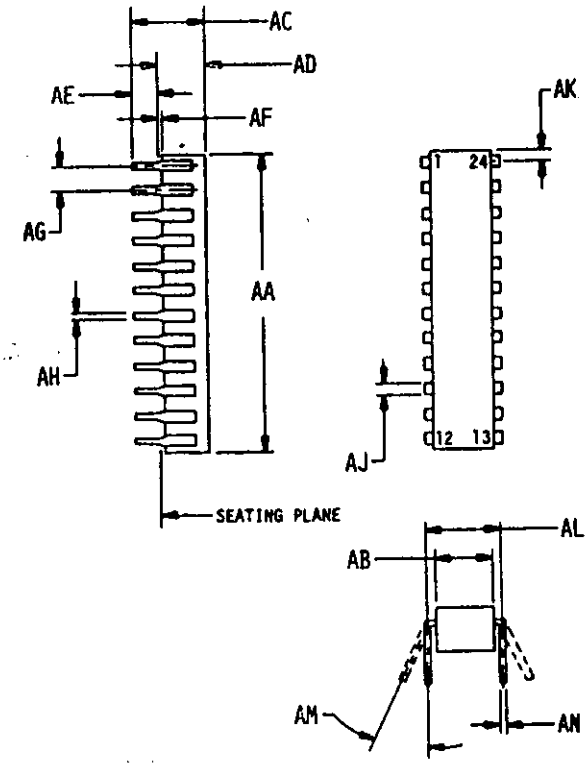


005-02-4


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX A

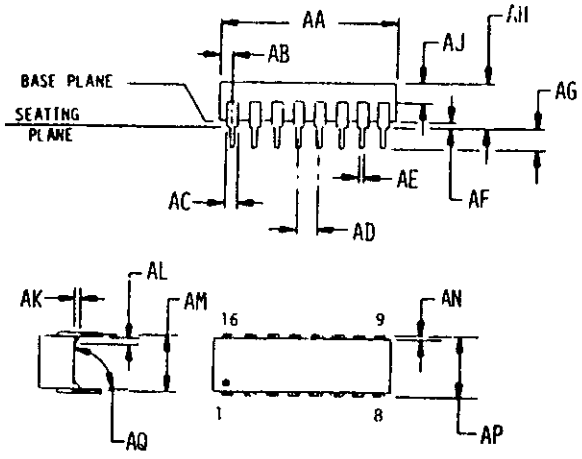

005-02-5




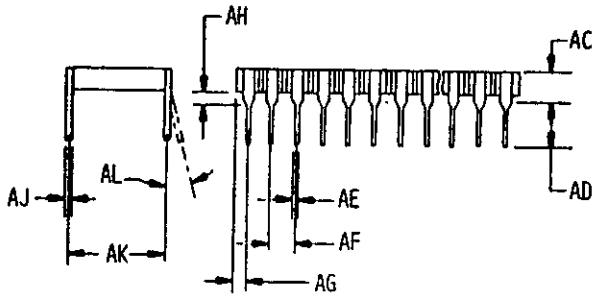


005-02-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX A

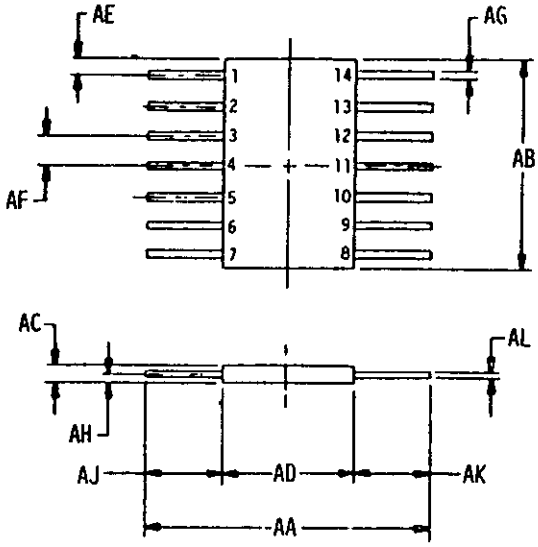


005-03-1

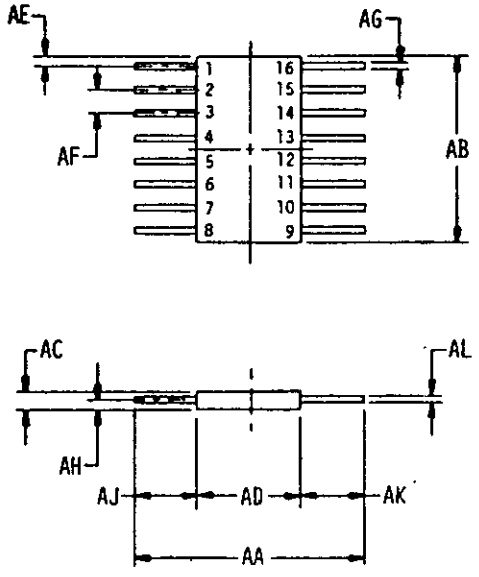


005-03-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX A

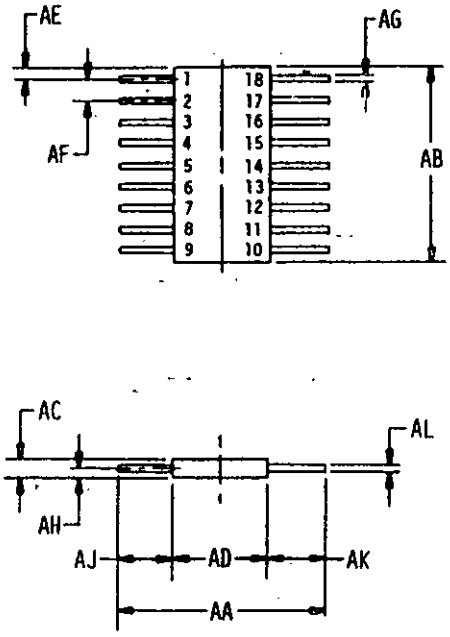


005-03-3

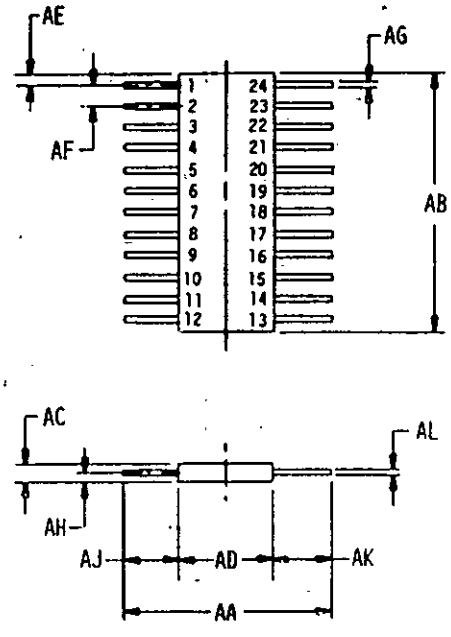


005-03-4

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX A

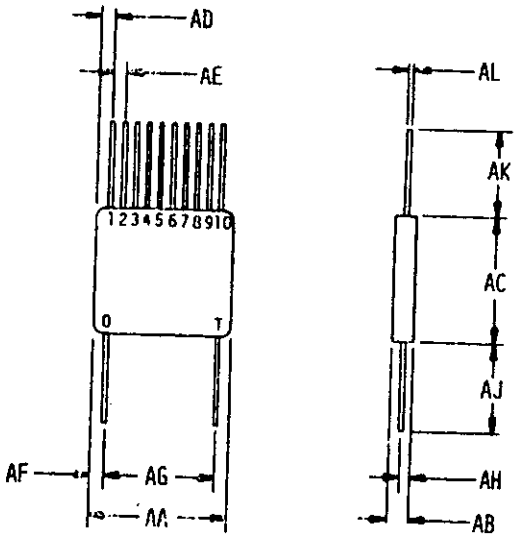


005-03-5

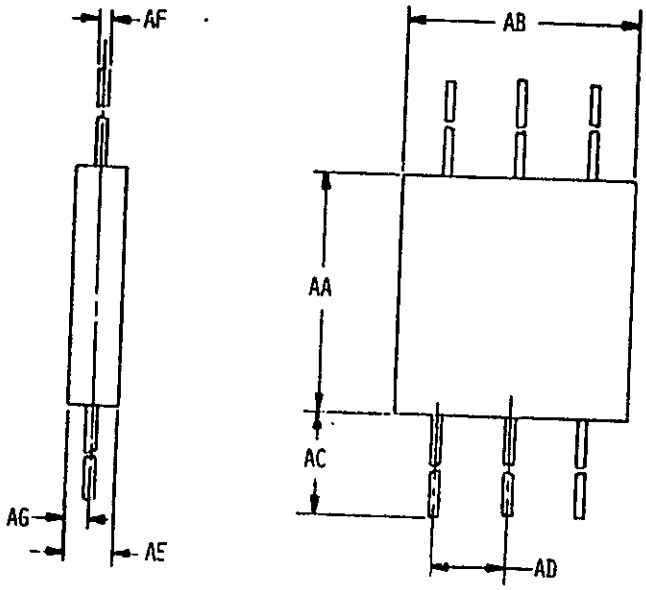

005-03-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.


APPENDIX A

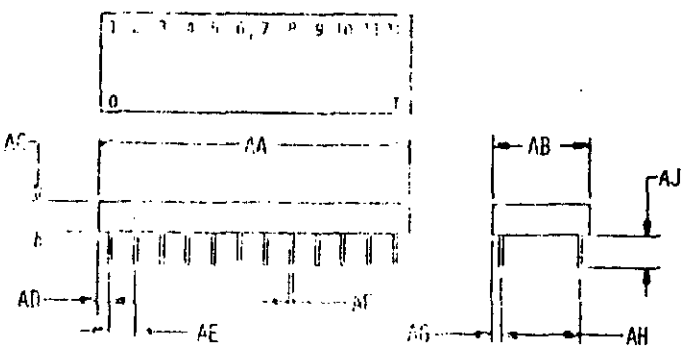


P05-AA-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX A

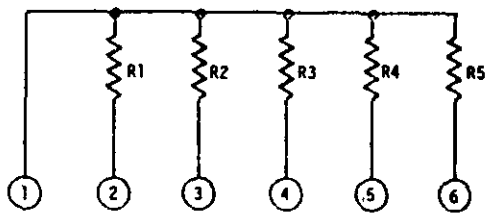


005-05-1

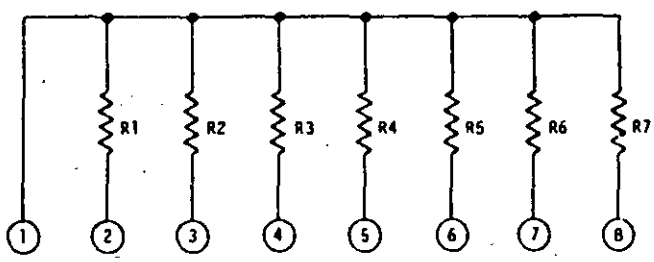


005-05-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.


APPENDIX A

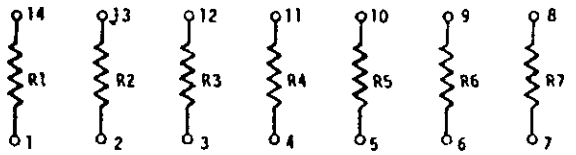

005-05-3

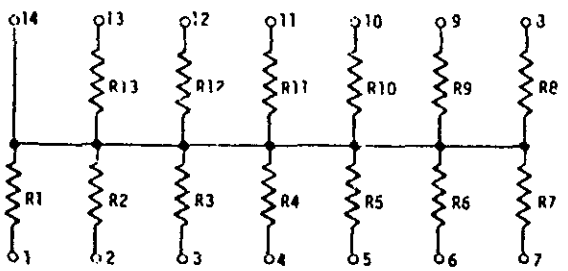


005-05-4

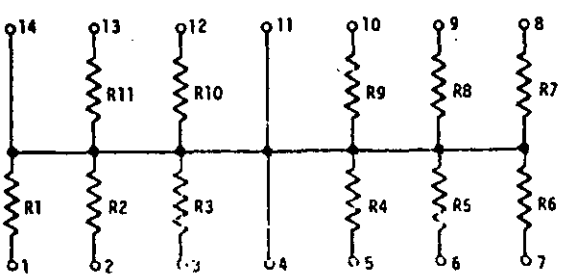


005-05-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.


APPENDIX A

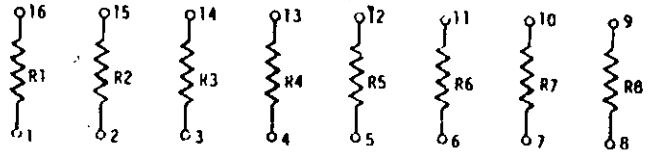

005-05-6

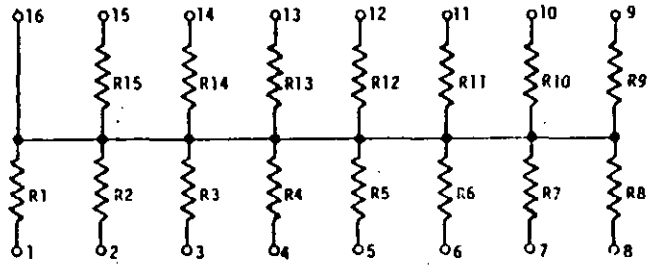


005-05-7

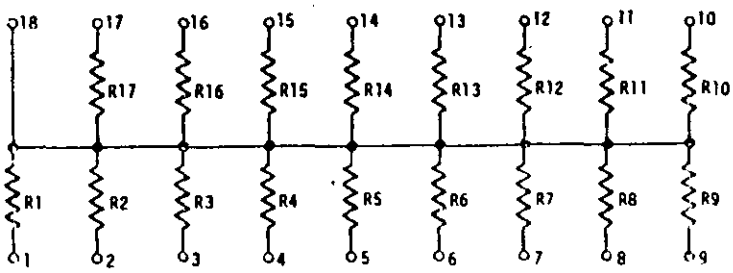


005-05-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX A

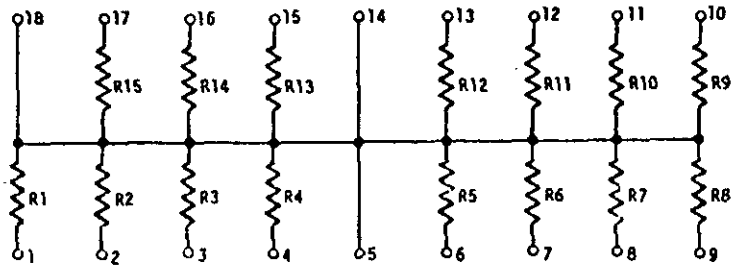


005-05-9

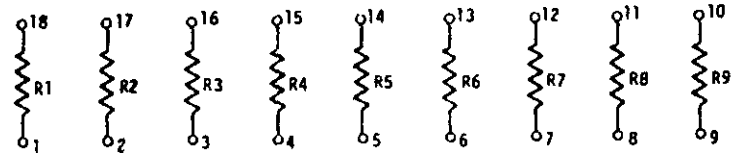


005-05-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX A

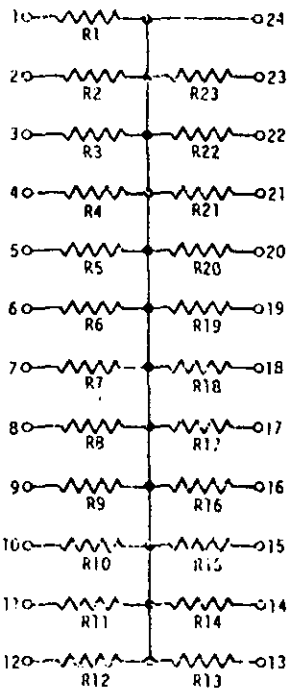


005-05-12

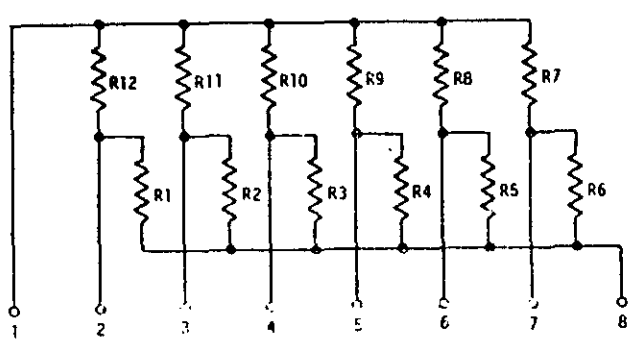


005-05-13

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX A

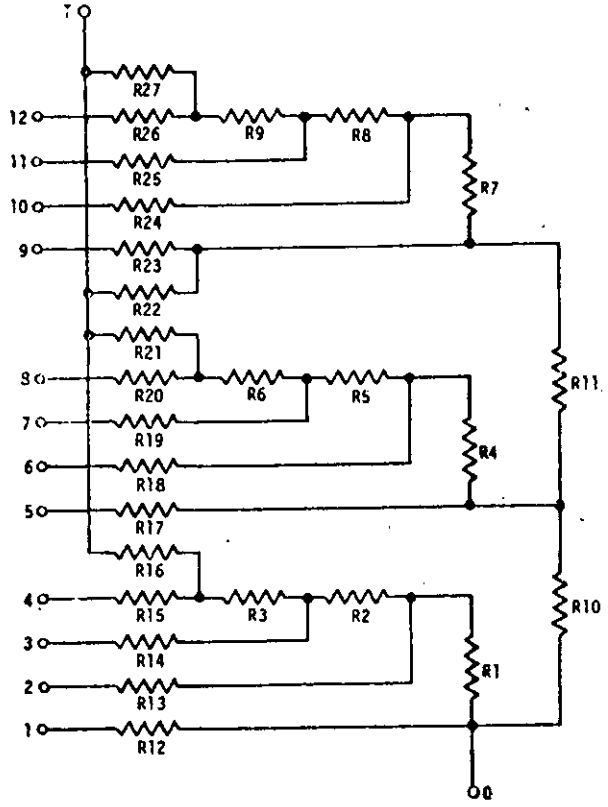


005-05-14

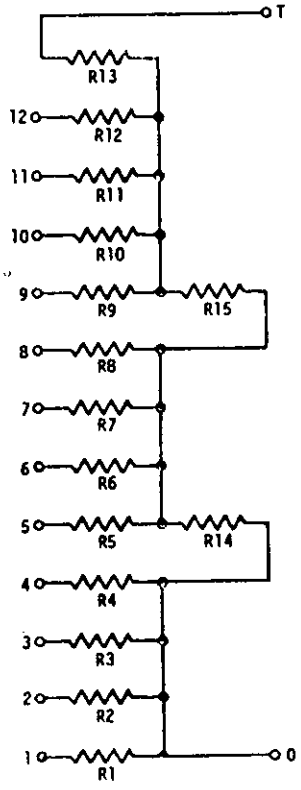


005-05-15

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX A

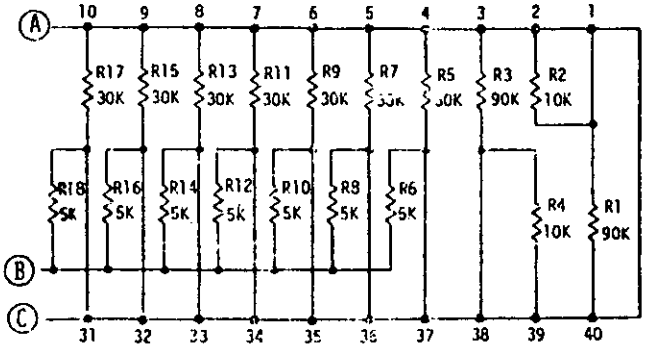


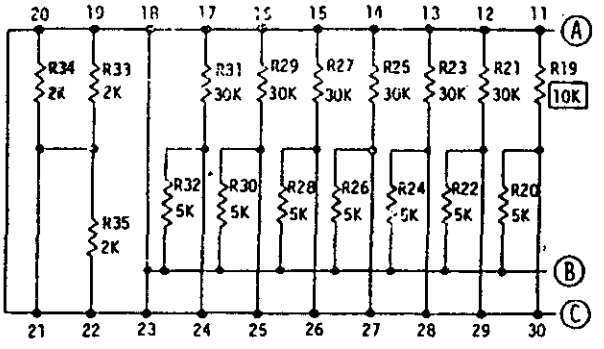


005-05-16

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX A

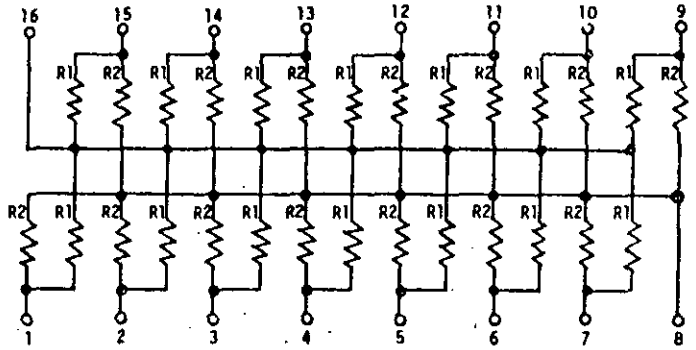


005-05-17




005-05-18

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.


APPENDIX A

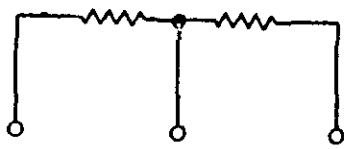

005-05-19




005-05-20




005-05-21

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX A



005-05-22

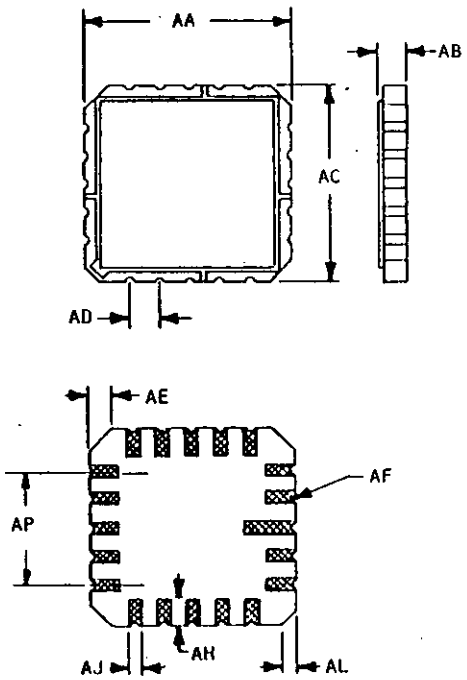

005-06-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

10. GENERAL

10.1 Scope. This appendix cross references each code available in this standard to the page upon which the code appears. This appendix is not a mandatory part of the standard. The information contained herein is intended for guidance only.

20. Applicable documents. This section is not applicable to this appendix.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	12	1412	98	1497	56	1650	24
0102	12	1413	98	1498	56	1660	30
0103	12	1414	98	1500	92	1662	30
0104	12	1416	98	1502	92	1664	30
0105	12	1418	96	1504	92	1666	30
0107	14	1419	96	1508	90	1668	30
0108	14	1420	98	1509	90	1680	32
0112	12	1421	98	1511	56	1682	32
0700	12	1426	108	1520	58	1684	32
0800	12	1427	108	1522	56	1686	32
1004	12	1428	108	1523	56	1688	32
1005	12	1429	62	1524	56	1690	
1006	12	1430	110	1533	102	1692	
1009	20	1431	108	1534	104	1694	
1371	54	1432	64	1535	106	1696	
1372	58	1433	96	1536	106	1698	
1373	56	1435	106	1537	106	1700	
1375	96	1436	106	1538	108	1702	
1376	56	1438	108	1557	36	1704	
1377	56	1439	110	1562	18	1706	
1378	56	1446	100	1563	18	1708	
1380	52	1447	102	1564	18	1710	
1381	58	1448	102	1566	18	1712	
1383	58	1449	66	1568	20	1714	
1384	54	1452	108	1570	18	1716	
1386	54	1453	108	1572	18	1718	
1387	54	1455	100	1574	18	1720	
1388	54	1456	100	1576	18	1722	
1391	64	1459	110	1578	18	1724	40
1394	62	1462	110	1580	18	1726	
1395	64	1466	104	1602	72	1728	
1396	62	1467	104	1604	72	1730	
1397	64	1469	100	1606	72	1732	
1398	62	1470	104	1608	72	1734	44
1400	62	1471	90	1614	30	1736	
1404	64	1473	100	1618	30	1738	
1406	64	1475	104	1620	30	1740	52
1407	54	1476	104	1642	20	1742	52
1410	96	1480	104	1644	20	1744	52
1411	96	1490	104	1646	20	1746	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1748		1832	62	1924		2150	108
1750	52	1834	62	1926		2172	112
1752		1836		1928		2174	112
1758	50	1838		1930		2188	110
1760	50	1840	62	1932		2190	110
1762	52	1842	62	1936		2221	75
1764	52	1844	62	1938		2222	75
1766	52	1846	60	1940		2223	75
1768	52	1848	60	1948		2224	75
1770	52	1850	60	1950		2225	75
1772		1852	60	1962	74	2226	75
1774		1854	60	1964	74	2227	75
1776		1858	64	1966	74	2228	75
1778		1860		1980	78	2229	75
1780		1862	66	1994		2300	34
1782		1864	66	1996	90	2302	36
1784	54	1866	66	2002	76	2304	
1786		1868		2004	76	2306	
1788		1870	66	2008	76	2310	40
1790	60	1872	68	2010	76	2312	
1792	58	1874	68	2012	76	2314	
1794	60	1876	68	2014	76	2320	46
1796		1878	68	2020	78	2322	
1798		1890	66	2022	76	2324	
1800	56	1892		2024	78	2330	54
1802	60	1894		2036	76	2332	
1804	60	1896		2038	76	2334	
1806	60	1898		2040	76	2340	64
1808	60	1900		2042	76	2342	
1810		1902		2044	76	2344	
1812		1904		2046	76	2350	78
1814	58	1906		2048		2352	
1816	58	1908		2050		2354	
1818	58	1910		2060	94	2370	90
1820	58	1912		2090	96	2372	
1822	58	1914		2100		2374	
1824		1916		2104	100	2380	94
1826		1918		2120		2382	
1828		1920	68	2124	102	2384	
1830		1922	68	2140	104	2390	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2392		3023	27	3072	27	3121	27
2394		3024	27	3073	27	3122	27
2400	100	3025	27	3074	27	3123	27
2402		3026	27	3075	27	3124	27
2404		3027	27	3076	27	3125	27
2410	102	3028	27	3077	27	3126	27
2412		3029	27	3078	27	3127	27
2414		3030	27	3079	27	3128	27
2420	104	3031	27	3080	27	3129	27
2422		3032	27	3081	27	3130	27
2424		3033	27	3082	27	3131	27
2430	108	3034	27	3083	27	3132	27
2432		3035	27	3084	27	3133	27
2434		3036	27	3085	27	3134	27
2440	80	3037	27	3086	27	3135	27
2442	80	3038	27	3087	27	3136	27
2444	80	3039	27	3088	27	3137	27
3000	25	3040	27	3089	27	3138	27
3001	25	3050	25	3090	27	3139	27
3002	25	3051	25	3100	25	3140	27
3003	25	3052	25	3101	25	3150	25
3004	25	3053	25	3102	25	3151	25
3005	25	3054	25	3103		3152	25
3006	25	3055	25	3104	25	3153	25
3007	25	3056	25	3105	25	3154	25
3008	25	3057	25	3106	25	3155	25
3009	25	3058	25	3107	25	3156	25
3010	25	3059	25	3108	25	3157	25
3011	25	3060	25	3109	25	3158	25
3012	25	3061	25	3110	25	3159	25
3013	25	3062	25	3111	25	3160	25
3014	25	3063	25	3112	25	3161	25
3015	25	3064	25	3113	25	3162	25
3016	25	3065	25	3114	25	3163	25
3017	25	3066	25	3115	25	3164	25
3018	25	3067	25	3116	25	3165	25
3019	25	3068	25	3117	25	3166	25
3020	25	3069	25	3118	25	3167	25
3021	27	3070	25	3119	25	3168	25
3022	27	3071	27	3120	25	3169	25

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3170	25	3219	25	4674	92	4745	84
3171	27	3220	25	4675	92	4746	84
3172	27	3221	27	4677	92	4748	84
3173	27	3222	27	4683	94	4749	88
3174	27	3223	27	4684	92	4750	88
3175	27	3224	27	4685	92	4751	88
3176	27	3225	27	4686	92	4752	88
3177	27	3226	27	4691	78	4754	50
3178	27	3227	27	4692	80	4755	50
3179	27	3228	27	4694	78	4756	50
3180	27	3229	27	4695	80	4760	48
3181	27	3230	27	4698	78	4761	50
3182	27	3231	27	4700	78	4762	50
3183	27	3232	27	4701	78	4765	84
3184	27	3233	27	4703	90	4766	84
3185	27	3234	27	4707	102	4770	84
3186	27	3235	27	4708	102	4771	84
3187	27	3236	27	4709	102	4772	84
3188	27	3237	27	4713	100	4773	84
3189	27	3238	27	4714	100	4782	82
3190	27	3239	27	4715	100	4829	82
3200	25	3240	27	4718	78	4830	80
3201	25	3300	28	4719	100	4831	82
3202	25	3302	28	4722	98	4834	80
3203	25	3304	28	4723	98	4835	82
3204	25	3306	28	4726	98	4836	80
3205	25	3308	28	4729	106	4838	82
3206	25	3310	28	4730	106	4839	82
3207	25	3312	28	4731	106	4844	46
3208	25	3314	30	4732	86	4845	46
3209	25	3316	30	4734	86	4846	48
3210	25	4662	94	4735	88	4847	44
3211	25	4663	94	4736	88	4848	46
3212	25	4664	94	4737	86	4849	42
3213	25	4665	94	4738	86	4850	48
3214	25	4666	94	4739	86	4854	46
3215	25	4667	94	4740	86	4855	46
3216	25	4669	80	4741	86	4856	44
3217	25	4671	80	4742	88	4859	42
3218	25	4672	92	4743	90	4861	46

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4862	46	5069	16	6333	90	6993	114
4863	36	5070	16	6359	54	6994	114
4864	36	5071	16	6369	12	6995	114
4865	36	6052	16	6370	84	7001	112
4867	48	6200	102	6372	114	7002	112
4868	36	6205	94	6696	70	7003	112
4869	48	6226	36	6697	70	7004	112
4870	48	6233	36	6698	70	7005	112
4874	44	6239	38	6699	70	7021	34
4875	44	6250	36	6700	70	7022	34
4878	82	6251	36	6701	70	7302	16
4884	40	6263	38	6706	72	7572	20
4885	42	6264	38	6707	72	7577	20
4886	42	6265	38	6710	70	7580	20
4891	44	6267	48	6713	70	7629	114
4892	36	6272	34	6790	32	7630	114
4893	38	6273	34	6791	32		
4894	40	6277	34	6792	32		
4900	44	6279	82	6793	32		
4901	40	6280	44	6794	32		
4906	40	6292	42	6795	34		
4908	40	6293	42	6798	34		
4950	22	6294	42	6799	34		
4975	110	6296	96	6803	34		
4976	110	6300	40	6870	112		
4977	110	6308	44	6873	12		
4978	106	6311	42	6874	14		
4979	106	6312	42	6920	72		
4983	66	6320	86	6921	70		
4984	66	6321	86	6922	72		
4985	64	6322	86	6923	70		
4986	66	6323	86	6924	72		
4989	80	6324	88	6929	68		
4991	64	6325	88	6930	68		
5000	48	6326	88	6937	68		
5054	16	6328	88	6939	70		
5060	16	6329	88	6941	14		
5061	16	6330	90	6942	14		
5063	16	6331	90	6991	114		
5068	16	6332	90	6992	114		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Acceleration	30
Additional Part Marking	108
Additional Requirements	106
Altitude	28
Altitude Rating	16
Aperture Cards Required	14
Applicable Documents	108
Base Document	12
Capacitance	28,33
Capacitance-Temperature Characteristic	36
Capacitor Insulation Resistors	38
Capacitor Type	28
City, State, Zip	12
Classification	18
Company Name/Command	12
Configuration	7,20
Contract Number/Office Symbol	20
Control	12
DC Resistance	40
DC Resistance and Tolerance Table	24
Definition of Hermetic Sealing	108
Definitions	5
Design and Construction	22
Dielectric Withstanding Voltage at Reduced Barometric Pressure	42
Dielectric Withstanding Voltage at Sea Level	46
Dissipation Factor	50
Enclosure	28
Finishes	22
Format	12
Fungus	52
Government Design Activity Cage Code	12
High Temperature Exposure	52
Illustrations	7,22
Insulation Resistance	54
Low Temperature Operation	58
Low Temperature Storage	60

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (cont)

	Page
Materials	22
Metals	22
Military Specification Title Index	1
Moisture Resistance	62
Mounting Hardware	106
MSE Formats	9
Noise Index	66
Nomenclature	108
Notes	108
Packaging	108
Part Marking	106
Part Number	14
Part Number Cross-Reference	108
Phone Number	12
Power Coefficient	26
Power Rating	18
Quality Assurance Provisions	108
Referenced Documents	3
Reliability Screening (Burn-in, Ageing, Conditioning, Stabilization, Load Life, Overload)	68
Requester Cage Code	12
Requester's Name	12
Resistance Temperature Characteristic	70
Resistance to Soldering Heat	74
Resistance to Solvents	76
Revision of AEDPS Document (Number)	14
Rise Time	26
Salt Spray	78
Scope	1,14
Seal	78
Shock, Specified Pulse	84
Short Time Overload	86
Solderability	88
Source Table	.14
Street/Building	12
Superseded Document	108
System Application	.12
Tabulated Characteristics	9,22
Temperature	30
Temperature Rating	16
Termination	28

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (cont)

	Page
Terminal Strength	90
Thermal Shock (Temperature Cycling)	94
Tracking	26
Unit of Measure	7,14
Utilization	1
Vibration, High Frequency	96
Vibration, Low Frequency	98
Vibration, Random	100
Voltage Coefficient	104
Voltage Rating	20
Weight/Mass	30
Workmanship	106

*U.S. GOVERNMENT PRINTING OFFICE: 1990--704-034/30759

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-STD-35-97B(MI)	900719

3. DOCUMENT TITLE
AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM RESISTOR NETWORKS

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
U.S. Army Missile Command (MI)	(1) Commercial (205) 876-6980	(2) AUTOVON 746-6980
c. ADDRESS (Include Zip Code) Commander, U.S. Army Missile Command, ATTN: AMSMI-RD-SE-TD-ST, Redstone Arsenal, AL 35898-5270	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD FORM 89 OCT 1426

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.