INCH-POUND
MS25041H
11 January 2022
SUPERSEDING
MS25041G
24 December 1985

DETAIL SPECIFICATION SHEET

LIGHT, INDICATOR, PRESS TO TEST, SMALL

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

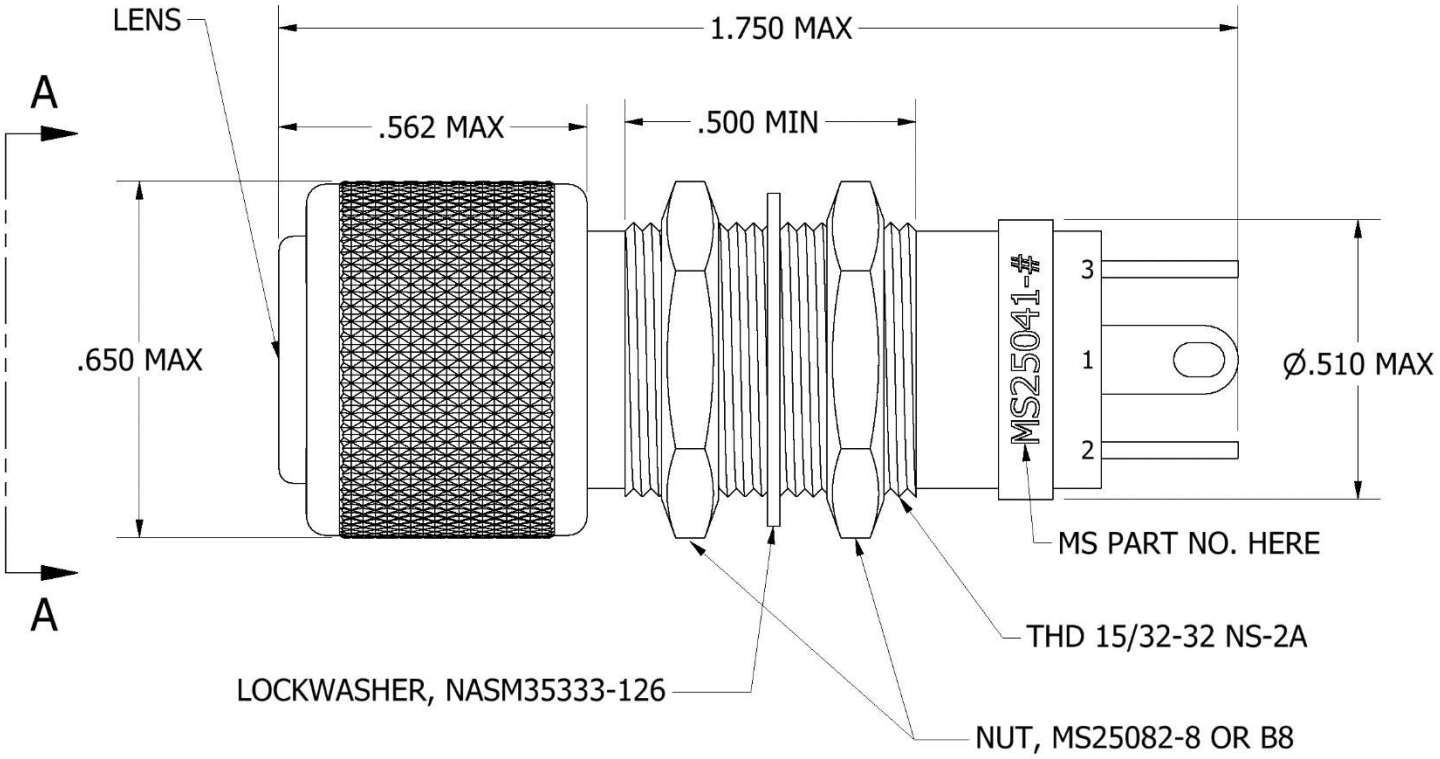



FIGURE 1. Design and Configuration

Comments, suggestions, or questions on this document should be sent to: STDZNMGT@dla.mil or Defense Logistics Agency Aviation VEB, 8000 Jefferson Davis Highway, Richmond, VA 23297-5616. Since contact information can change, you may want to verify the currency of this address information using the ASSIST database at https://assist.dla.mil/.

AMSC N/A FSC 6210

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:07Z
Check the source to verify that this is the current version before use.

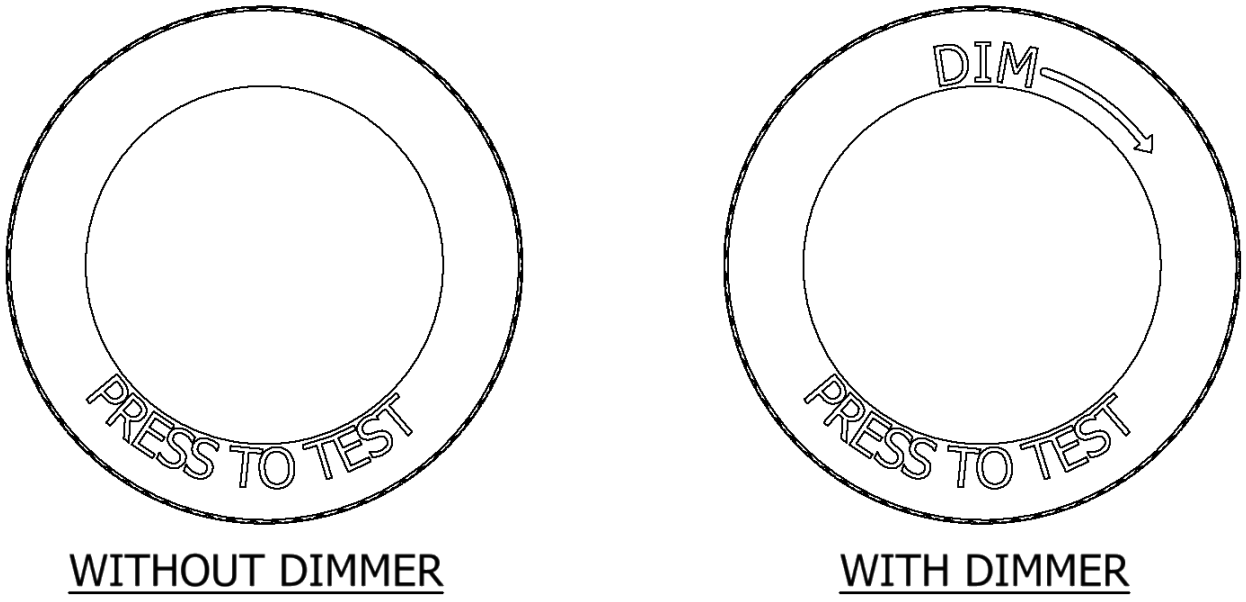

VIEW A-A

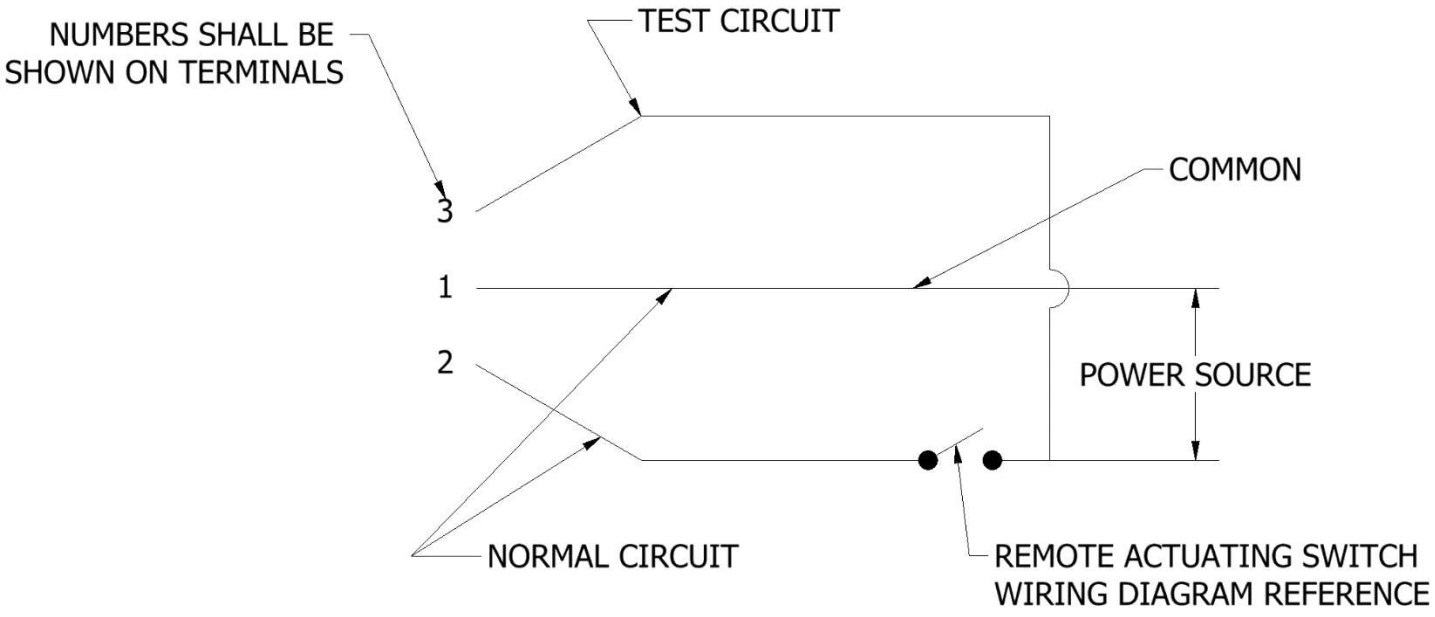


FIGURE 1. Design and Configuration - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:07Z
Check the source to verify that this is the current version before use.

3D Model for reference only.

FIGURE 1. Design and Configuration - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:07Z
Check the source to verify that this is the current version before use.

TABLE I. Dash Number

With Dimmer Feature	Without Dimmer Feature	Lens Color
-1	-5	Colorless
-2	-6	Red
-3	-7	Green
-4	-8	Yellow
-10	-11	Blue
-12[1]	-13[1]	NVG Green

TABLE II. Lamp Reference

Part Number	Voltage (Volts)
M6363/8-5	28
M6363/8-2	6

NOTES:
1. Dimensions in inches.
2. Procurement specification: MIL-DTL-7961
3. Lamp reference specification: MIL-DTL-6363/8
4. The part number marked on the assembly shall be that of the complete assembly, less lamp.
5. The part number for the assembly with the lamp shall consist of the MS part number for the assembly with an additional dash number, which is the trade number of the lamp.
6. Example of part number: MS25041-2-327 – Light, Indicator, Press to Test, with lamp.
7. The part number for the assembly shall be marked on the shipping container only.

NVG Green (Night Vision Goggle Green) Lens color for -12 and -13 shall have spectral transmission characteristics corresponding of the following requirements.

Peak transmission: The peak transmission of the filter on a graph of measured transmission versus wavelength shall be 60% ± 3%.

Peak wavelength: The wavelength at which peak transmission occurs on a graph of measured transmission versus wavelength shall be 480 ± 20 nanometers.

Red transmission: The Z of transmission for each wavelength shown shall not be exceeded. The percentage of transmission for the wavelengths between two corresponding numbers shall not exceed the higher of the two corresponding transmittance numbers, Wavelengths are in nanometers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:07Z
Check the source to verify that this is the current version before use.

TABLE III. Transmission

Wavelength (NM)	Transmittance	Wavelength (NM)	Z Transmittance
550	25	900	0.005
600	5	950	0.014
650	0.11	1000	0.048
700	0.009	1050	0.127
750	0.002	1100	0.308
800	0.002	1150	0.660
850	0.003	1200	1.2

Referenced documents. In addition to procurement specification, MIL-DTL-7961, this document references the following:

MIL-DTL-6363/8
MS25082
NASM35333

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - CR4
Navy - AS
DLA - GS

Reviewers:
Army - AT

Preparing activity:
DLA – GS2

(Project 6210-2022-001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:07Z
Check the source to verify that this is the current version before use.