INCH-POUND
MS51991E
4 September 2025
SUPERSEDING
MS51991D
w/AMENDMENT 1
20 August 2015

DETAIL SPECIFICATION SHEET

INSERT, SCREW THREAD-LOCKED IN, RING LOCKED, SERRATED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and procurement specification MIL-DTL-45910.

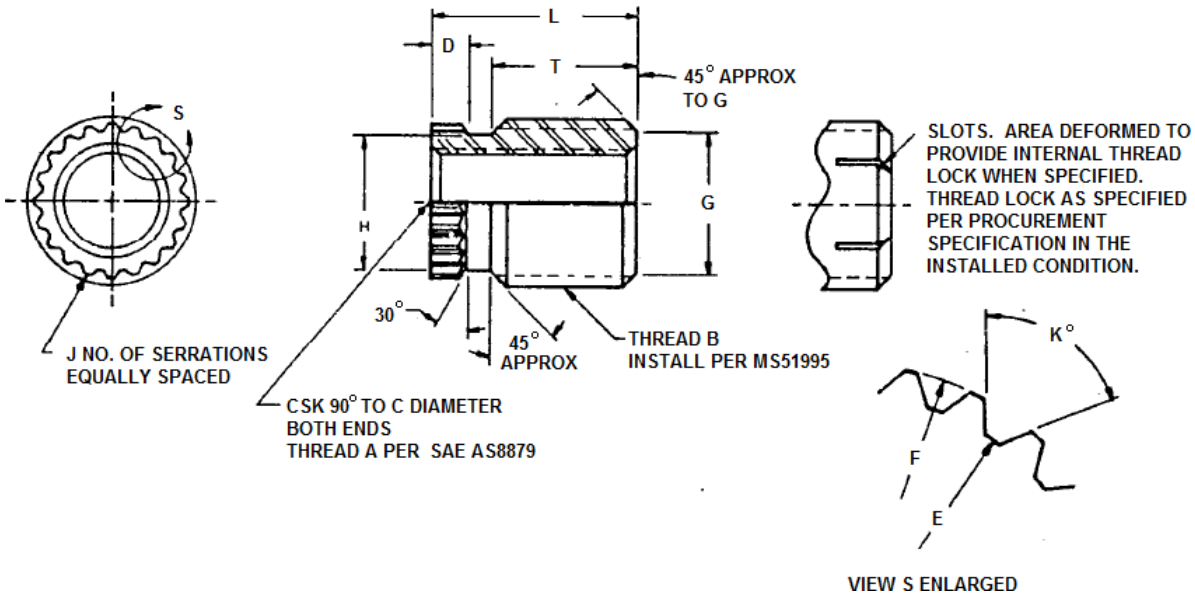


FIGURE 1. INSERT, SCREW THREAD.

Comments, suggestions, or questions on this document should be addressed to DLA Aviation-VEB, 6090 Strathmore Road, Richmond, VA 23237 or e-mailed to STDZNMGT@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST database at https://assist.dla.mil/.

AMSC N/A FSC 5325

Distribution Statement A. Approved for public release: distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:18Z
Check the source to verify that this is the current version before use.

TABLE I. Coarse Internal and Coarse External Threads.

DASH NO.	A INTERNAL THREAD UNJC-3B		B EXTERNAL THREAD SEE NOTE 4			C	D	ØE	ØF	ØG	ØH	J	K°	L	T	LOCK RING PART NO. (REF) SEE NOTE 15
	SIZE	MINOR DIA (REF)	SIZE	PITCH DIA	MINOR DIA		±.015	+.005 -.004	+.007 -.002				+2° -1°	±.015	±.015	
-102	.1120-40	.0942 .0877	.1900-24	.1648 .1633	.1407 .1334	.122 .117	.060	.152	.175	.138 .133	.148	14	102°	.250	.150	MS51990-102P
-103	.1380-32	.1157 .1076	.2160-24	.1908 .1893	.1667 .1594	.149 .144	.080	.178	.201	.164 .159	.175	16	90°	.310	.190	MS51990-103P
-104	.1640-32	.1417 .1336	.2500-20	.2198 .2178	.1909 .1824	.175 .170	.080	.203	.230	.187 .182	.197	13	102°	.380	.250	MS51990-104P
-105	.1900-24	.1600 .1494	.3125-18	.2789 .2769	.2468 .2373	.208 .198	.090	.255	.284	.237	.248	17	86°	.440	.290	MS51990-105P
-106	.2500-20	.2121 .2013	.3750-16	.3372 .3347	.3011 .2906	.270 .260	.110	.316	.345	.291	.305	20	102°	.500	.330	MS51990-106P
-107	.3125-18	.2690 .2584	.5000-13	.4531 .4506	.4087 .3963	.339 .324	.120	.380	.407	.396	.370	24	102°	.560	.360	MS51990-107P
-108	.3750-16	.3251 .3142	.5625-12	.5116 .5091	.4635 .4503	.402 .387	.120	.456	.487	.425	.445	26	102°	.620	.420	MS51990-108P
-109	.4375-14	.3795 .3680	.6250-11	.5693 .5668	.5168 .5028	.466 .451	.140	.567	.601	.503	.553	26	111°	.690	.460	MS51990-109P
-110	.5000-13	.4368 .4251	.7500-10	.6885 .6860	.6308 .6156	.530 .515	.160	.687	.721	.590	.612	30	111°	.750	.490	MS51990-110P

TABLE II. Fine Internal and Coarse External Threads.

DASH NO.	A INTERNAL THREAD UNJC-3B		B EXTERNAL THREAD SEE NOTE 4			C	D	ØE	ØF	ØG	ØH	J	K°	L	T	LOCK RING PART NO. (REF) SEE NOTE 15
	SIZE	MINOR DIA (REF)	SIZE	PITCH DIA	MINOR DIA		±.015	+.005 -.004	+.007 -.002				+2° -1°	±.015	±.015	
-202	.1120-48	.0971 .0917	.1900-24	.1648 .1633	.1407 .1334	.122 .117	.060	.152	.175	.138 .133	.148	14	102°	.250	.150	MS51990-102P
-203	.1380-40	.1202 .1137	.2160-24	.1908 .1893	.1667 .1594	.148 .143	.080	.178	.201	.164 .159	.175	16	90°	.310	.190	MS51990-103P
-204	.1640-36	.1442 .1370	.2500-20	.2198 .2178	.1909 .1824	.175 .170	.080	.203	.230	.187 .182	.197	13	102°	.380	.250	MS51990-104P
-205	.1900-32	.1675 .1596	.3125-18	.2789 .2769	.2468 .2373	.206 .196	.090	.255	.284	.237	.248	17	86°	.440	.290	MS51990-105P
-206	.2500-28	.2229 .2152	.3750-16	.3372 .3347	.3011 .2906	.267 .257	.110	.316	.345	.291	.305	20	102°	.500	.330	MS51990-106P
-207	.3125-24	.2799 .2719	.5000-13	.4531 .4506	.4087 .3963	.336 .321	.120	.380	.407	.396	.370	24	102°	.560	.360	MS51990-107P
-208	.3750-24	.3418 .3344	.5625-12	.5116 .5091	.4635 .4503	.398 .383	.120	.456	.487	.425	.445	26	102°	.620	.420	MS51990-108P
-209	.4375-20	.3970 .3888	.6250-11	.5693 .5668	.5168 .5028	.462 .447	.140	.567	.601	.503	.553	26	111°	.690	.460	MS51990-109P
-210	.5000-20	.4591 .4513	.7500-10	.6885 .6860	.6308 .6156	.525 .510	.160	.687	.721	.590	.612	30	111°	.750	.490	MS51990-110P

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:18Z
Check the source to verify that this is the current version before use.

TABLE III. Fine Internal and Fine External Threads.

DASH NO.	A INTERNAL THREAD UNJC-3B		B EXTERNAL THREAD SEE NOTE 4			C	D	ØE	ØF	ØG	ØH	J	K°	L	T	LOCK RING PART NO. (REF) SEE NOTE 15
	SIZE	MINOR DIA (REF)	SIZE	PITCH DIA	MINOR DIA		±.015	+.005 -.004	+.007 -.002				+2° -1°	±.015	±.015	
-311	.5625-18	.5166 .5084	.8750-14	.8316 .8291	.7904 .7786	.589 .574	.160	.783	.820	.728	.768	30	111°	.880	.620	MS51990-111P
-312 (a)	.6250-18	.5788 .5709	1.0000-14	.9566 .9541	.9154 .9036	.685 .675	.160	.894	.932	.850	.882	38	102°	1.000	.740	MS51990-112P
-312.1	.6250-18	.5788 .5709	1.0000-12	.9491 .9466	.9010 .8878	.685 .675	.160	.894	.932	.850	.882	38	102°	1.000	.740	MS51990-112P
-313	.7500-16	.6977 .6892	1.1250-12	1.0741 1.0716	1.0260 1.0128	.777 .762	.160	1.029	1.074	.950	1.002	36	111°	1.120	.800	MS51990-113P
-314	.8750-14	.8152 .8055	1.2500-12	1.1991 1.1966	1.1510 1.1378	.904 .889	.190	1.169	1.214	1.127	1.127	48	90°	1.250	.900	MS51990-114P
-315	1.0000-12	.9298 .9189	1.3750-12	1.3241 1.3216	1.2760 1.2628	1.029 1.014	.190	1.273	1.318	1.202	1.252	42	111°	1.380	1.020	MS51990-115P

(a) Inactive (not to be used for new design)

TABLE IV. Interchangeability. – see note 14

Part Numbers					
Cancelled (CRES 17-10P)	New (CRES A-286)	Cancelled (CRES 17-10P)	New (CRES A-286)	Cancelled (CRES 17-10P)	New (CRES A-286)
MS51991	MS51991	MS51991	MS51991	MS51991	MS51991
C102	E102	C202	E202	C311	E311
C103	E103	C203	E203	C312	E312
C104	E104	C204	E204	C312.1	E312.1
C105	E105	C205	E205	C313	E313
C106	E106	C206	E206	C314	E314
C107	E107	C207	E207	C315	E315
C108	E108	C208	E208		
C109	E109	C209	E209		
C110	E110	C210	E210		

NOTES:

1. Material:
   - Steel, carbon, composition C117 in accordance with ASTM A108
   - Steel, corrosion-resistant, Type A286 (UNS S66286) per SAE AMS5731, SAE AMS5732, SAE AMS5734 or SAE AMS5737

2. Protective coating:
   - Steel, carbon shall be cadmium plated in accordance with SAE AMS-QQ-P-416, Type II, Class 3
   - Steel, carbon shall be zinc-nickel plated in accordance with MIL-PRF-32647, Type K16
   - Steel, corrosion-resistant, shall be passivated in accordance with SAE AMS2700
   - Steel, corrosion-resistant, shall be passivated in accordance with SAE AMS2700, Method 1, Type 6, Type 7, or Type 8, no post treatment, or Method 2, no post treatment
   - Steel, corrosion-resistant, with internal thread lock for aerospace applications shall also be solid film lubricant coated per SAE AS5272 Type I[1]
   - Steel, corrosion-resistant, with internal thread lock for non-aerospace applications shall also be solid film lubricant coated per MIL-PRF-46010[2]

[1]SAE AS5272 Type 1 lubricant is technically equivalent to MIL-L-46010 Type I lubricant which superseded MIL-L-8937 lubricant used in previous revisions.

[2]MIL-PRF-46010 lubricant is lead (Pb) free and is not technically equivalent to MIL-L-46010 Type I lubricant which superseded MIL-L-8937 lubricant used in previous revisions. Use of MIL-PRF-46010 in aerospace applications must first be validated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:18Z
Check the source to verify that this is the current version before use.

3. Surface roughness: Machine surfaces shall be 125 microinches in accordance with ASME B46.1 except serrated collar.

4. Threads: The external thread has a special pitch diameter and minor diameter which installs into a national class 3 tapped hole. Threads also shall be in accordance with procurement specification.

5. Heat treatment: Inserts shall be capable of developing 125,000 PSI tensile strength as specified in the procurement specification.

6. Hardness: – Steel, carbon, Rockwell B 78 minimum
– Steel, corrosion-resistant, Rockwell B 83 minimum


7. Fillets: .015 R max.

8. Edges: Break sharp edges .003 - .015 unless otherwise specified.

9. Dimensions: Dimensions are in inches and are met after plating.

10. Tolerances: Linear dimensions ±.005, angular dimensions ±2°.

11. Part numbers:

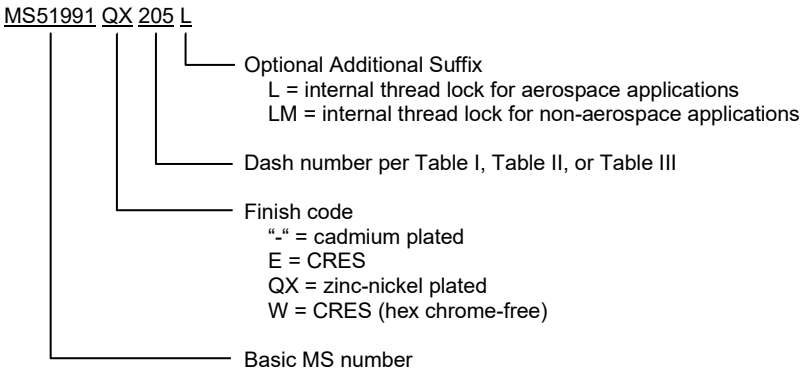

Examples:	MS51991-205	Insert, carbon steel, non-locking, cadmium plated
	MS51991QX205	Insert, carbon steel, non-locking, zinc-nickel plated
	MS51991E205	Insert, CRES, non-locking, passivated
	MS51991W205	Insert, CRES, non-locking, hex chrome-free, passivated
	MS51991-205L	Insert, carbon steel, internal thread lock, aerospace applications.
	MS51991QX205L	Insert, carbon steel, internal thread lock, aerospace applications, zinc-nickel plated
	MS51991E205L	Insert, CRES, internal thread lock, aerospace applications
	MS51991E205LM	Insert, CRES, internal thread lock, non-aerospace applications
	MS51991W205LM	Insert, CRES, internal thread lock, non-aerospace applications, hex chrome-free, passivated

12. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

13. Referenced documents shall be of the same issue in effect on date of invitation for bid.

14. The dash numbers "C100, C200, and C300" series CRES inserts in the original issue of this standard are cancelled/inactivated after approval date of revision "A" indicated on this document. The cancelled inserts should be used on existing callouts until stock is depleted. Use the new "E100, E200, and E300" series CRES inserts for replacement of "C100, C200, and C300" series CRES inserts in accordance with Table IV.

15. For applicable locking dash number coding see SAE AS51990.

16. Changes from previous issue: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:18Z
Check the source to verify that this is the current version before use.

APPENDIX A

3D Model of MS51991-207 for reference only.
Viewing this model requires a PDF viewer that supports 3D models.
Adobe Acrobat is known to support 3D models but there may be other suitable viewers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:18Z
Check the source to verify that this is the current version before use.

MILITARY INTEREST

Custodians:
Army – AR
Navy – AS
Air Force – 71
DLA – GS

Preparing Activity
DLA – GS6

(Project 5325-2025-006)

Review activities:
Army – AT, AV, MI
Navy – OS

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:18Z
Check the source to verify that this is the current version before use.