

FED. SUP CLASS
5355

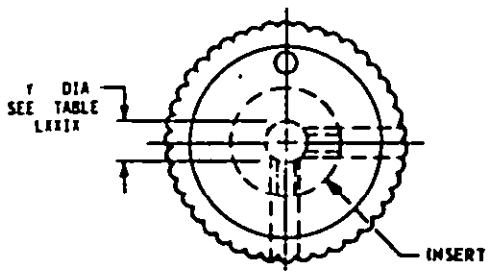

TOP VIEW SHOWING ROUND SHAFT HOLE

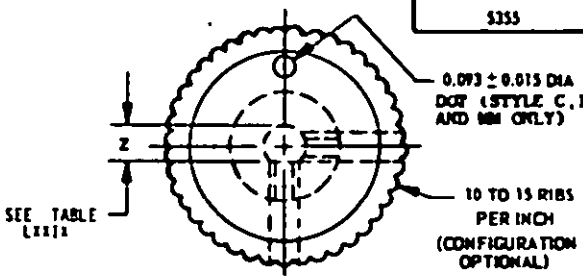

TOP VIEW SHOWING "D" FLAT SHAFT HOLE

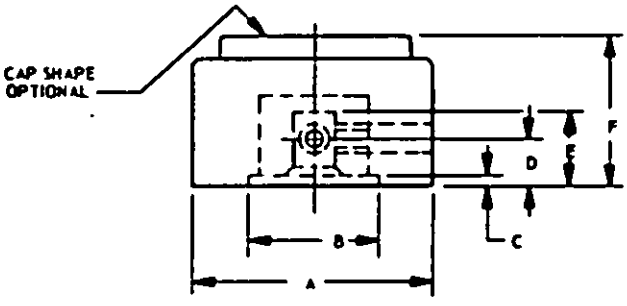


TABLE I - ROUND KNOBS

MS DASH NUMBER	SERIES	A +0.000 -0.010	NUT CLEARANCE B MIN	NUT CLEARANCE C MIN	D MAX	SHAFT HOLE DEPTH E MIN	F ± 0.030	SET SCREWS (2 REQ'D) 1/8" SHAFT HOLE	SET SCREWS (2 REQ'D) 1/4" SHAFT HOLE
SEE TABLE II	0	0.500	0.435	0.026	0.158	0.405	0.510	.112-40 UNC-3A	.112-40UNC-3A
	1	0.700	0.435	0.026	0.187	0.405	0.610	.112-40 UNC-3A	.112-40 UNC-3A
	2	0.900	0.640	0.114	0.260	0.520	0.790	.112-40 UNC-3A	.164-32 UNC-3A
	3	1.250	0.750	0.114	0.260	0.655	0.700	——	.164-32 UNC-3A
	4	1.750	0.750	0.114	0.260	0.520	0.850	——	.164-32 UNC-3A
	5	2.250	0.750	0.114	0.260	0.520	0.875	——	.164-32 UNC-3A

TABLE II - MS DASH NUMBER

MS91528-2N2B

SERIES	STYLE	SHAFT HOLE DIAMETER	COLOR
0	N - ROUND	1 - 1/8" ROUND	B --BLACK
1	C - ROUND WITH WHITE DOT	2 - 1/4" ROUND	G --- GRAY
2	I - ROUND WITH FLUORESCENT DOT	3 - 1/8" "D" FLAT	R — RED
3	MM - ROUND WITH PHOSPHORESCENT DOT	4 - 1/4" "D" FLAT	
4			
5			

NOTES:
1. STYLE I AND MM KNOBS-THERMAL SHOCK SHALL BE IN ACCORDANCE WITH TEST CONDITION A METHOD 107 OF MIL-STD-202.
2. FOR GENERAL NOTES SEE SHEET 47.

(J) DENOTES CHANGES

P.A.	MC	TITLE: KNOBS-CONTROL, PLASTIC (ROUND, CONCENTRIC, POINTER, SPINNER, SPINNER SLIP-CLUTCH, BAR, TACTILE, KNOB LOCK POINTER, SLIP-CLUTCH, AND KNOB LOCKS)	MILITARY STANDARD
Other Cust	ER		MS 91528
	11		
PROCUREMENT SPECIFICATION: MIL-K-3926		SUPERSEDES:	SHEET 1 OF 47

COORDINATED

PROJECT NO 5355-0203


APPROVED 8 DEC 1988 REVISED (6) 17 APR 78 (J) 6 February 1984

User activities: Navy - CG, OS


review activities: Army - MI, AT, AV, EA, ME; Navy - MC, AS; DLA - ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:22Z
Check the source to verify that this is the current version before use.

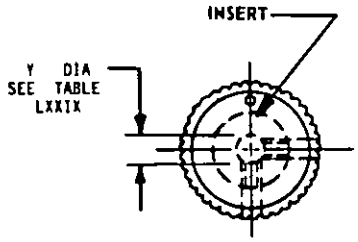

TOP VIEW SHOWING ROUND SHAFT HOLE

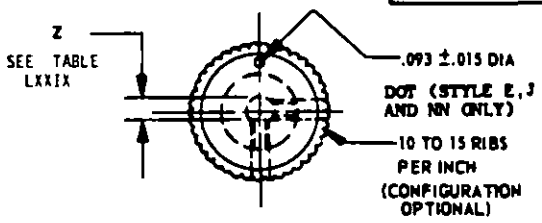

TOP VIEW SHOWING "D" FLAT SHAFT HOLE

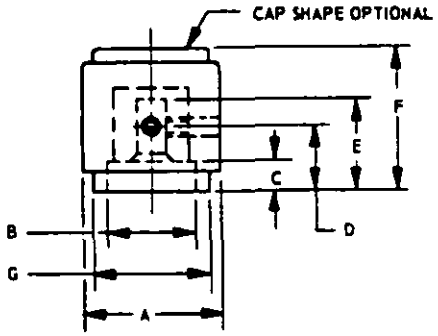


TABLE III - ROUND RING SKIRT KNOBS

MS DASH NUMBER	SERIES	A +0.030 −0.010	NUT CLEARANCE B MIN	NUT CLEARANCE C MIN	D MAX	SHAFT HOLE DEPTH E MIN	F ± 0.030	G MAX	SET SCREWS (2 REQ'D) 1/8" SHAFT HOLE	SET SCREWS (2 REQ'D) 1/4" SHAFT HOLE
SEE TABLE IV	0	0.500	0.300	0.177	0.325	0.560	0.655	0.460	.112-40UNC-3A	.112-40UNC-3A
	1	0.700	0.485	0.188	0.369	0.568	0.782	0.680	.112-40UNC-3A	.112-40UNC-3A
	2	.0900	0.640	0.320	0.484	0.730	1.010	0.845	.112-40UNC-3A	.164-32UNC-3A
	3	1.250	0.750	0.750	0.427	0.605	0.850	1.185	—	.164-32UNC-3A
	4	1.750	0.750	0.320	0.489	0.740	1.070	1.690	—	.164-32UNC-3A
	5	2.250	0.750	0.320	0.489	0.740	1.095	2.185	—	.164-32UNC-3A

TABLE IV - MS DASH NUMBER

MS91528-2E2B

SERIES	STYLE	SHAFT HOLE DIAMETER	COLOR
0	D – SKIRTED ROUND	1 – 1/8" ROUND	B – BLACK
1	E – SKIRTED ROUND WITH WHITE DOT	2 – 1/4" ROUND	G – GRAY
2	J – SKIRTED ROUND WITH FLUORESCENT DOT	3 – 1/8" "D" FLAT	R – RED
3	NN – SKIRTED ROUND WITH PHOSPHORESCENT DOT	4 – 1/4" "D" FLAT	
4			
5			

NOTES:
1. STYLE J AND NN KNOBS-THERMAL SHOCK SHALL BE IN ACCORDANCE WITH TEST CONDITION A, METHOD 107 PER MIL-STD-202.
2. FOR GENERAL NOTES SEE SHEET 47

APPROVED 2 DEC 1955 REVISED (1) For changes see sheets 15, 16, 29, 37, and 42

User activities:
Navy - CG, OS

Review activities:
Army - MI, AT, AV, EA, ME
Navy - MC, AS
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A.	MC
Other Cust	ER
	11

TITLE: KNOBS-CONTROL, PLASTIC (ROUND, CONCENTRIC, POINTER, SPINNER, SPINNER SLIP-CLUTCH, BAR, TACTILE, KNOB LOCK POINTER, SLIP-CLUTCH, AND KNOB LOCKS)

MILITARY STANDARD
MS 91528

PROCUREMENT SPECIFICATION: MIL-K-3926


SUPERSEDES:

SHEET 2 OF 47

COORDINATED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:22Z
Check the source to verify that this is the current version before use.


FED. SUP CLASS
5355

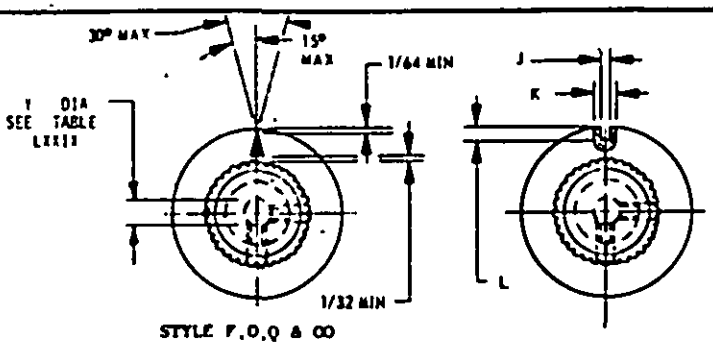

STYLE F,O,Q & OO TOP VIEW SHOWING ROUND SHAFT HOLE

STYLE H

TOP VIEW SHOWING "D" FLAT SHAFT HOLE

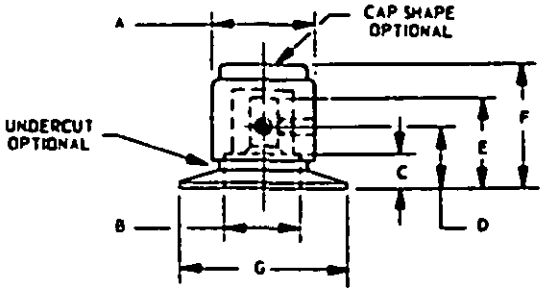

KNOB SERIES	DIMENSIONS		
	J ±0.010	K ±0.010	L ±0.010
0	0.063	0.188	0.125
1	0.063	0.188	0.125
2	0.063	0.188	0.218
3	0.063	0.188	0.218
4	—	—	—
5	—	—	—

TABLE V - ROUND DIAL SKIRT KNOBS

MS DASH NUMBER	SERIES	A +0.030 −0.010	NUT CLEARANCE B MIN	NUT CLEARANCE C MIN	D MAX	SHAFT HOLE DEPTH E MIN	F ±0.030	G MAX	SET SCREWS (2 REQ'D) 1/8" SHAFT HOLE	SET SCREWS (2 REQ'D) 1/4" SHAFT HOLE
SEE TABLE VI	0	0.500	0.300	0.177	0.325	0.560	0.655	0.900	.112-40UNC-3A	.112-40UNC-3A
	1	0.700	0.485	0.188	0.369	0.568	0.782	1.150	.112-40UNC-3A	.112-40UNC-3A
	2	0.900	0.640	0.320	0.484	0.730	1.010	1.525	.112-40UNC-3A	.164-32UNC-3A
	3	1.750	0.750	0.250	0.427	0.605	0.850	1.837	—	.164-32UNC-3A
	4	1.750	0.750	0.320	0.489	0.740	1.070	2.468	—	.164-32UNC-3A
	5	2.250	0.750	0.320	0.489	0.740	1.095	3.020	—	.164-32UNC-3A

TABLE VI - MS DASH NUMBER

MS91528-2F2B

SERIES	STYLE		SHAFT HOLE DIAMETER	COLOR
0	F - ROUND DIAL SKIRT WITH "WHITE ARROW"	O - ROUND DIAL SKIRT WITH BACKLIGHTED WHITE ARROW	1 - 1/8" ROUND	B - BLACK
1	G - ROUND DIAL SKIRT, NO ARROW	Q - ROUND DIAL SKIRT WITH FLUORESCENT ARROW	2 - 1/4" ROUND	G - GRAY
2			3 - 1/8" "D" FLAT	R - RED
3			4 - 1/4" "D" FLAT	
4	H - ROUND DIAL SKIRT WITH SLOT	OO - ROUND DIAL SKIRT WITH PHOSPHORESCENT ARROW		
5				

NOTES:
1. STYLE O KNOBS-ARROW BACKLIGHTED IN ACCORDANCE WITH MIL-P-7788. STYLE Q AND OO KNOBS-THERMAL SHOCK SHALL BE IN ACCORDANCE WITH TEST CONDITION A, METHOD 107 OF MIL-STD-202.
2. FOR GENERAL NOTES SEE SHEET 47.

User activities: Navy - CG, OS

Review activities: Army - MI, AT, AV, EA, ME; Navy - EC, AS; DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 2 DEC 1955 REVISED (J) For changes see sheets 15, 16, 29, 37, and 42

P.A.	DC
Other Cust	ER
	11

TITLE: KNOBS-CONTROL, PLASTIC (ROUND, CONCENTRIC, POINTER, SPOOLER, SPINNER SLIP-CLUTCH, BAR, TACTILE, KNOB LOCK POINTER, SLIP-CLUTCH, AND KNOB LOCK)

MILITARY STANDARD

MS91528


PROCUREMENT SPECIFICATION: MIL-K-3926

SUPERSEDES


SHEET 3 OF 40

COORDINATED

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:22Z
Check the source to verify that this is the current version before use.

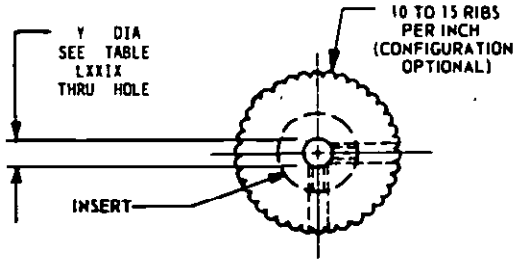

TOP VIEW SHOWING ROUND SHAFT HOLE

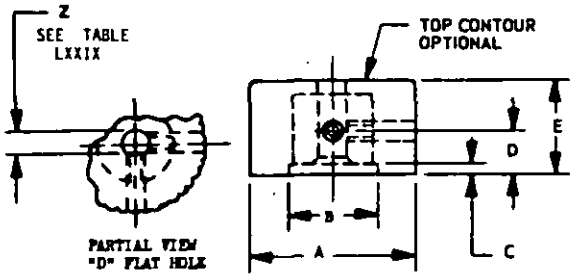

CONCENTRIC KNOBS CONSIST OF TWO SEPARATE PARTS: AN UPPER KNOB FOR THE INNER CONTROL SHAFT AND A LOWER KNOB FOR THE OUTER CONTROL SHAFT. EACH IS IDENTIFIED BY ITS OWN MS DASH NUMBER AND EACH MUST BE SPECIFIED AND ORDERED SEPARATELY. ONLY LOWER KNOBS FOR OUTER CONTROL SHAFTS ARE DETAILED ON THIS SHEET. UPPER KNOBS FOR INNER CONTROL SHAFTS SHOULD BE SPECIFIED AND SELECTED FROM AMONG THE 1/8 INCH SHAFT HOLE DIAMETER ROUND, RING SKIRT ROUND, ROUND TACTILE, AND RING SKIRT ROUND TACTILE KNOBS DETAILED ON SHEETS 1, 2, 30 AND 31.

ORDINARILY, SERIES 0 UPPER KNOBS ARE USED WITH SERIES 1 CONCENTRIC LOWER KNOBS; SIMILARLY, SERIES 1 AND SERIES 2 UPPER KNOBS ARE USED WITH SERIES 2 AND SERIES 3 CONCENTRIC LOWER KNOBS RESPECTIVELY.

TABLE VII-ROUND CONCENTRIC KNOBS

MS DASH NUMBER	SERIES	A +0.030 -0.010	NUT CLEARANCE B MIN	NUT CLEARANCE C MIN	D MAX	E ±0.015	SET SCREWS (2 REQ'D) 1/4 SHAFT HOLE
SEE	1	0.700	0.485	0.026	0.187	0.510	.112-40UNC-3A
TABLE	2	0.900	0.640	0.114	0.260	0.655	.164-32UNC-3A
VIII	3	1.250	0.750	0.114	0.260	0.530	.164-32UNC-3A

TABLE VIII-MS DASH NUMBER

MS91528-2N2BC

SERIES	STYLE	SHAFT HOLE DIAMETER	COLOR	KNOB FORM
1 2 3	N - ROUND	2 - 1/4" ROUND 4 - 1/4" "D" FLAT	B - BLACK G - GRAY R - RED	C - CONCENTRIC

NOTES:
1.. FOR GENERAL NOTES SEE SHEET 47.

APPROVED 2 DEC 1955 REVISED ① For changes see sheets 15, 16, 29, 37, and 42

User activities:
Navy - CG, OS.


Review activities:
Army - MI, AT, AV, EA, ME
Navy - MC, AS
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.


P.A. DC Other Cust ER 11	TITLE: KNOBS-CONTROL, PLASTIC (ROUND, CONCENTRIC, POINTER, SPINNER, SPINNER SLIP-CLUTCH, BAR, TACTILE, KNOB LOCK POINTER, SLIP-CLUTCH, AND KNOB LOCKS)	MILITARY STANDARD MS91528
PROCUREMENT SPECIFICATION MIL-K-3926	SUPERSEDES:	SHEET 4 OF 47

COORDINATED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:22Z
Check the source to verify that this is the current version before use.

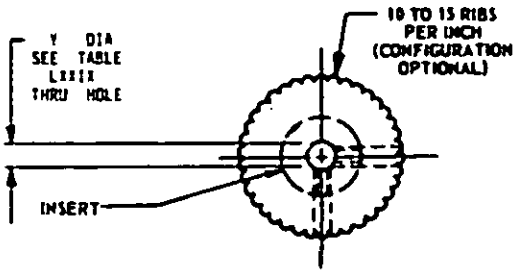

TOP VIEW SHOWING ROUND SHAFT HOLE

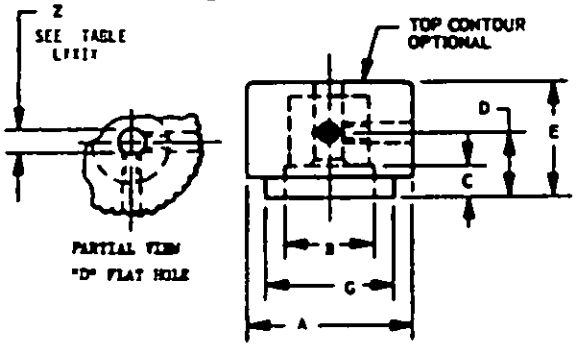

CONCENTRIC KNOBS CONSIST OF TWO SEPARATE PARTS: AN UPPER KNOB FOR THE INNER CONTROL SHAFT AND A LOWER KNOB FOR THE OUTER CONTROL SHAFT. EACH IS IDENTIFIED BY ITS OWN MS DASH NUMBER AND EACH MUST BE SPECIFIED AND ORDERED SEPARATELY. ONLY LOWER KNOBS FOR OUTER CONTROL SHAFTS ARE DETAILED ON THIS SHEET. UPPER KNOBS FOR INNER CONTROL SHAFTS SHOULD BE SPECIFIED AND SELECTED FROM AMONG THE 1/8 INCH SHAFT HOLE DIAMETER ROUND, RING SKIRT ROUND, ROUND TACTILE, AND RING SKIRT ROUND TACTILE KNOBS DETAILED ON SHEETS 1, 2, 30 AND 31.

ORDINARILY, SERIES 0 UPPER KNOBS ARE USED WITH SERIES 1 CONCENTRIC LOWER KNOBS; SIMILARLY, SERIES 1 AND SERIES 2 UPPER KNOBS ARE USED WITH SERIES 2 AND SERIES 3 CONCENTRIC LOWER KNOBS RESPECTIVELY.

TABLE IX-ROUND CONCENTRIC RING SKIRT KNOBS

MS DASH NUMBER	SERIES	A +0.000 -0.010	NUT CLEARANCE B MIN	NUT CLEARANCE C MIN	D MAX	E ±0.025	G MAX	SET SCREWS (2 REQ'D) 1/4" SHAFT HOLE
SEE TABLE IX	1	0.700	0.435	0.188	0.369	0.690	0.680	.112-40UNC-3A
	2	0900	0.640	0.320	0.484	0.885	0.845	.164-32UNC-3A
	3	1.250	0.750	0.250	0.427	0.700	1.185	.164-32UNC-3A

TABLE X-MS DASH NUMBER

MS91528-2D2BC

SERIES	STYLE	SHAFT HOLE DIAMETER	COLOR	KNOB FORM
1 2 3	D - SKIRTED ROUND	2 - 1/4" ROUND 6 - 1/8" "D" FLAT	B - BLACK G - GRAY R - RED	C - CONCENTRIC

NOTES:
1. FOR GENERAL NOTES SEE SHEET 47.

User activities:
Navy - CG, OS

Review activities:
Army - MI, AT, AV, EA, ME
Navy - MC, AS
DLA - 15


This military standard is approved, for use by all Departments and Agencies of the Department of Defense Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 2 DEC 1955 REVISED (J) for changes see sheets 15, 16, 29, 31, and 42

P.A. DC Other Cust ER 11	TITLE KNOBS-CONTROL, PLASTIC (ROUND, CONCENTRIC, POINTER, SPINNER, SPINNER SLIP-CLUTCH, BAR, TACTILE, KNOB LOCK POINTER, SLIP-CLUTCH, AND KNOB LOCKS)	MILITARY STANDARD MS91528
PROCUREMENT SPECIFICATION MIL-K-3926	SUPERSEDES	SHEET 5 OF 47

COORDINATED

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:22Z
Check the source to verify that this is the current version before use.

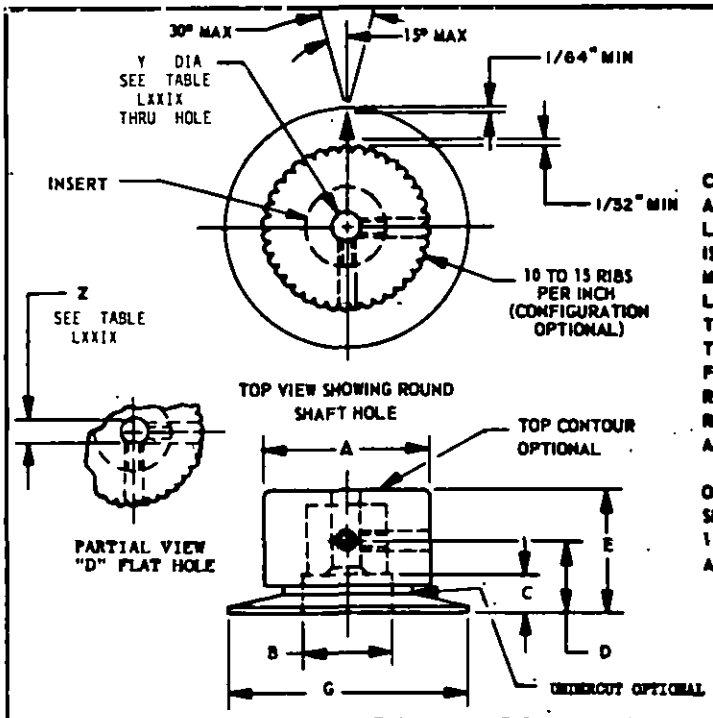

CONCENTRIC KNOBS CONSIST OF TWO SEPARATE PARTS: AN UPPER KNOB FOR THE INNER CONTROL SHAFT AND A LOWER KNOB FOR THE OUTER CONTROL SHAFT. EACH IS IDENTIFIED BY ITS OWN MS DASH NUMBER AND EACH MUST BE SPECIFIED AND ORDERED SEPARATELY. ONLY LOWER KNOBS FOR OUTER CONTROL SHAFTS ARE DETAILED ON THIS SHEET. UPPER KNOBS FOR INNER CONTROL SHAFTS SHOULD BE SPECIFIED AND SELECTED FROM AMONG THE $\frac{1}{4}$ INCH SHAFT HOLE DIAMETER ROUND, RING SKIRT ROUND, ROUND TACTILE, AND RING SKIRT ROUND TACTILE KNOBS DETAILED ON SHEETS 1, 2, 30 AND 31.

ORDINARILY, SERIES 0 UPPER KNOBS ARE USED WITH SERIES 1 CONCENTRIC LOWER KNOBS; SIMILARLY, SERIES 1 AND SERIES 2 UPPER KNOBS ARE USED WITH SERIES 2 AND SERIES 3 CONCENTRIC LOWER KNOBS RESPECTIVELY.

TABLE XI - ROUND CONCENTRIC DIAL SKIRT KNOBS

MS DASH NUMBER	SERIES	A +0.030 −0.010	NUT CLEARANCE B MIN	NUT CLEARANCE C MIN	D MAX	E ±0.025	G MAX	SET SCREWS (2 REQ'D) 1/4" SHAFT HOLE
SEE TABLE XII	1	0.700	0.485	0.188	0.369	0.690	1.150	.112-40UNC-3A
	2	0900	0.640	0.320	0.484	0.885	1.525	.164-32UNC-3A
	3	1.250	0.750	0.250	0.427	0.700	1.837	.164-32UNC-3A

TABLE XII - MS DASH NUMBER

MS91528-2F2BC


SERIES	STYLE	SHAFT HOLE DIAMETER	COLOR	KNOB FORM
1 2 3	F - ROUND DIAL SKIRT WITH WHITE ARROW Q - ROUND DIAL SKIRT WITH FLUORESCENT ARROW 0 - ROUND DIAL SKIRT WITH BACKLIGHTED WHITE ARROW 00 - ROUND DIAL SKIRT WITH PHOSPHORESCENT ARROW	2 - 1/4" ROUND 4 - 1/4" "D" FLAT	B - BLACK G - GRAY R - RED	C - CONCENTRIC

NOTES:
1. STYLE 0 KNOBS-ARROW BACKLIGHTED IN ACCORDANCE WITH MIL-P-7788. STYLE Q AND 00 KNOBS-THERMAL SHOCK SHALL BE IN ACCORDANCE WITH TEST CONDITION A, METHOD 107 OF MIL-STD-202.
2. FOR GENERAL NOTES SEE SHEET 47.


APPROVED 2 DEC 1955 REVISED ① For changes see sheets 15, 16, 29, 37, and 42

User activities: Navy - CG, OS
Review activities: Army - MI, AT, AV, EA, ME Navy - MC, AS DLA - IS
This military standard is approved for use by all Departments and Agencies of the Department of Defense Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:22Z
Check the source to verify that this is the current version before use.

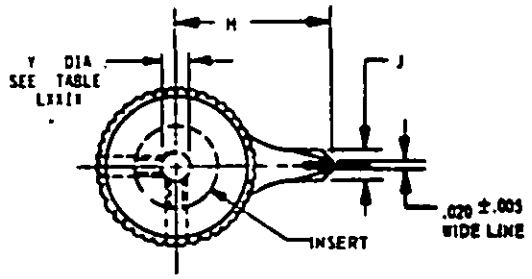

TOP VIEW SHOWING ROUND SHAFT HOLE

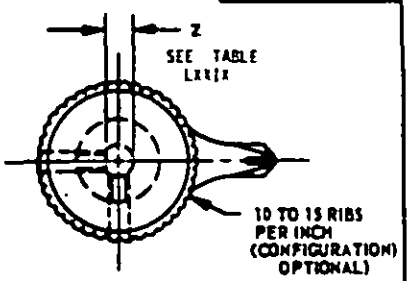

TOP VIEW SHOWING "D" FLAT SHAFT HOLE

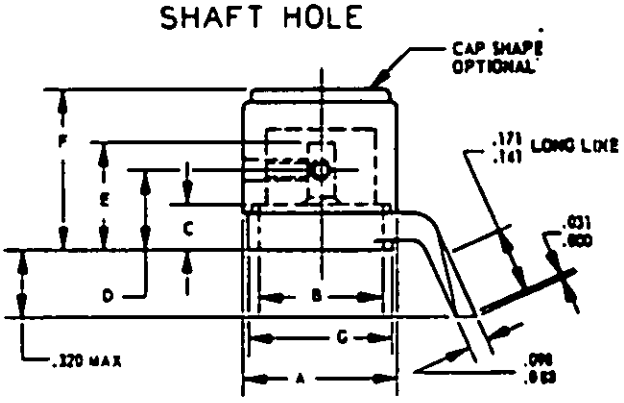


TABLE XIII - KNOB LOCK POINTER KNOBS

MS DASH NUMBER	SERIES	A +0.000 −0.010	NUT CLEARANCE B MIN	NUT CLEARANCE C MIN	D MAX	SHAFT HOLE DEPTH E MIN	P ±0.030	G MAX	H MAX	J MAX	SET SCREWS (2 REQ'D) 1/8" SHAFT HOLE	SET SCREWS (2 REQ'D) 1/4" SHAFT HOLE
SEE TABLE XIV	1	0.700	0.560	0.188	0.369	0.568	0.782	0.680	0.812	0.160	.112-40UNC-3A	.112-40UNC-3A
	2	0900	0.640	0.188	0.437	0.680	0.958	0.845	0.968	0.205	———	.164-32UNC-3A
	3	1.250	0.750	0.188	0.442	0.605	0.862	1.185	1.125	0.270	———	.164-32UNC-3A

TABLE XIV - MS DASH NUMBER

MS 91528 - 2 AA 2B

SERIES	STYLE	SHAFT HOLE DIAMETER	COLOR
1 2 3	AA — ROUND KNOB LOCK POINTER WITH WHITE LINE BB — ROUND KNOB LOCK POINTER WITH FLUORESCENT LINE QQ — ROUND KNOB LOCK POINTER WITH PHOSPHORESCENT LINE	1 - 1/8" ROUND 2 - 1/4" ROUND 3 - 1/8" "D" FLAT 4 - 1 4" "D" FLAT	B — BLACK G — GRAY R — RED

NOTES:
1. STYLE BB AND QQ KNOBS-THERMAL SHOCK SHALL BE IN ACCORDANCE WITH TEST CONDITION A, METHOD 107 OF MIL-STD-202.
2. KNOB LOCK POINTER KNOBS ARE USED WITH KNOB LOCKS AS SHOWN ON SHEET 35.
3. FOR GENERAL NOTES SEE SHEET 47.

User activities:
Navy - CG, OS

Review activities:
Army - MI, AT, AV, EA, ME
Navy - MC, AS
DLA - IS


This military standard is approved for use by all Departments and Agencies of the Department of Defense Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 2 DEC 1955 REVISED (J) for changes see sheets 15, 16, 20, 37, and 42


P.A. DC Other Cust ER 11	TITLE: KNOBS-CONTROL, PLASTIC (ROUND, CONCENTRIC, POINTER, SPINNER, SPINNER SLIP-CLUTCH, BAR, TACTILE, KNOB LOCK POINTER, SLIP-CLUTCH, AND KNOB LOCKS)	MILITARY STANDARD MS 91528
PROCUREMENT SPECIFICATION MIL-K-3926	SUPERSEDES:	SHEET 7 OF 47

COORDINATED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:22Z
Check the source to verify that this is the current version before use.

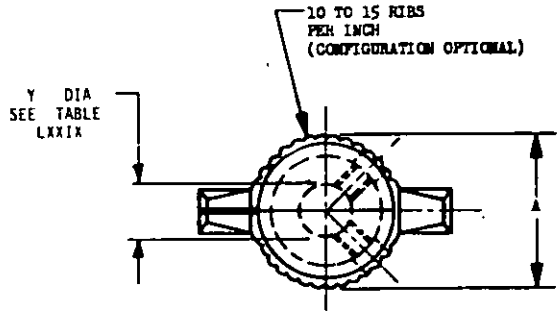

TOP VIEW SHOWING ROUND SHAFT HOLE

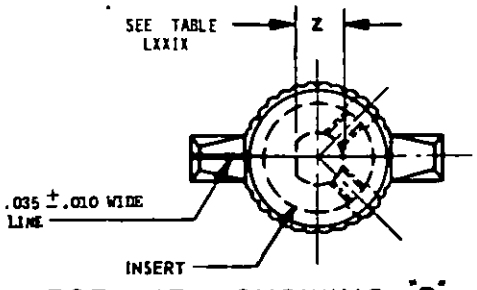

TOP VIEW SHOWING "D" FLAT SHAFT HOLE

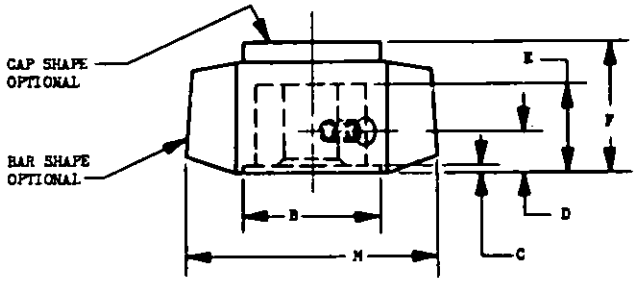


TABLE XV - ROUND BAR KNOBS

MS DASH NUMBER	SERIES	A +0.030 -0.010	NUT CLEARANCE B MIN	NUT CLEARANCE C MIN	D MAX	SHAFT HOLE DEPTH E MIN	F ±0.030	M ±0.025	SET SCREWS (2 REQ'D) 1/8" SHAFT HOLE	SET SCREWS (2 REQ'D) 1/4" SHAFT HOLE
SEE TABLE XVI	1	0.700	0.485	0.026	0.187	0.405	0.610	1.150	.112-40UNC-3A	.112-40UNC-3A

TABLE XVI - MS DASH NUMBER

MS 91528 - 1 GG 2 B

SERIES	STYLE	SHAFT HOLE DIAMETER	COLOR
1	GG--ROUND BAR WITH WHITE LINE	1--1/8" ROUND	B--BLACK
	JJ--ROUND BAR WITH FLUORESCENT LINE	2--1/4" ROUND	G--GRAY
	SS--ROUND BAR WITH PHOSPHORESCENT LINE	3--1/8" "D" FLAT	R--RED
		4--1/4" "D" FLAT	

NOTES:
1. STYLE JJ AND SS KNOBS-THERMAL SHOCK SHALL BE IN ACCORDANCE WITH TEST CONDITION A, METHOD 107 OF MIL-STD-202.
2. FOR GENERAL NOTES SEE SHEET 47.

APPROVED 2 DEC 1955 REVISED (J) For changes see sheets 15, 16, 29, 37, and 42

User activities:
Navy - CG, OS

Review activities:
Army - MI, AT, AV, EA, ME
Navy - MC, SH, AS
DLA - IS


This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A. DC	TITLE KNOBS-CONTROL, PLASTIC (ROUND, CONCENTRIC, POINTER, SPINNER, SPINNER SLIP-CLUTCH, BAR, TACTILE, KNOB LOCK POINTER, SLIP-CLUTCH, AND KNOB LOCKS)	MILITARY STANDARD
Other Cust ER 11		MS 91528
PROCUREMENT SPECIFICATION MIL-K-3926	SUPERSEDES:	SHEET 8 OF 47


DD FORM SEP 67 672-1 COORDINATED

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:22Z
Check the source to verify that this is the current version before use.

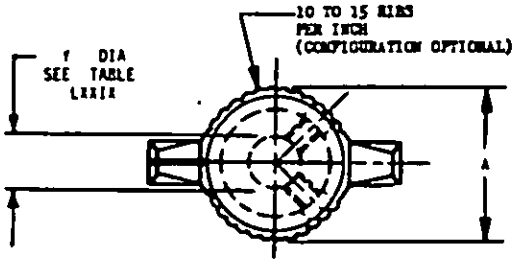

TOP VIEW SHOWING ROUND SHAFT HOLE

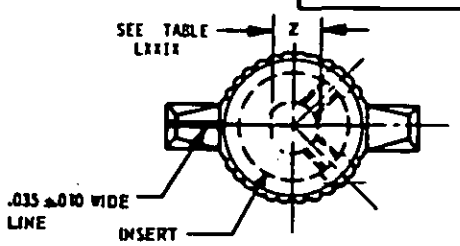

TOP VIEW SHOWING "D" FLAT SHAFT HOLE

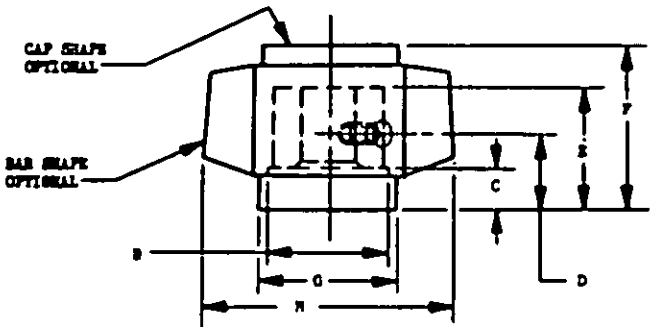


TABLE XVII-ROUND BAR RING SKIRT KNOBS

MS DASH NUMBER	SERIES	A ±0.030 -0.010	NUT CLEARANCE B MIN	NUT CLEARANCE C MIN	D MAX	E MIN	F ±0.030	G MAX	H ±0.025	SET SCREWS (2 REQ'D) 1/8" SHAFT HOLE	SET SCREWS (2 REQ'D) 1/8" SHAFT HOLE
SEE TABLE XVIII	1	0.700	0.185	0.188	0.369	0.568	0.782	0.680	1.150	.112-40UNC-3A	.112-40UNC-3A

TABLE XVIII - MS DASH NUMBER

MS91528 - 1 HH 2 B

SERIES	STYLE	SHAFT HOLE DIAMETER	COLOR
1	HH—ROUND BAR RING SKIRTED WITH WHITE LINE	1—1/8" ROUND	B—BLACK
		2—1/4" ROUND	G—GRAY
	KK—ROUND BAR RING SKIRTED WITH FLUORESCENT LINE	3—1/8" "D" FLAT	R—RED
	PP—ROUND BAR RING SKIRTED WITH PHOSPHORESCENT LINE	4—1/4" "D" FLAT	

NOTES:
1. STYLE KK AND PP KNOBS-THERMAL SHOCK SHALL BE IN ACCORDANCE WITH TEST CONDITION A, METHOD 107 OF MIL-STD-202.
2. FOR GENERAL NOTES SEE SHEET 47.


User activities: Navy - CG, OS
Review activities: Army - MI, AT, AV, EA, ME Navy - MC, AS DLA - IS
This military standard is approved for use by all Departments and Agencies of the Department of Defense Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.
APPROVED 2 DEC 1955 REVISED ⓐ For changes see sheets 15, 16, 29, 37, and 42

P.A. DC	TITLE KNOBS-CONTROL, PLASTIC (ROUND, CONCENTRIC, POINTER, SPINNER, SPINNER SLIP-CLUTCH, BAR, TACTILE, KNOB LOCK POINTER, SLIP-CLUTCH, AND KNOB LOCKS)	MILITARY STANDARD
Other Cust ER 11		MS91528
PROCUREMENT SPECIFICATION MIL-K-3986	SUPERSEDES	SHEET 9 OF 47


DD FORM 672-1 COORDINATED

Source: https://assist.dla.mil -- Downloaded: 20261O-26T07:22Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5955

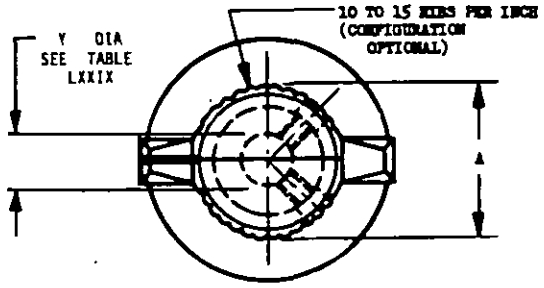

TOP VIEW SHOWING ROUND SHAFT HOLE

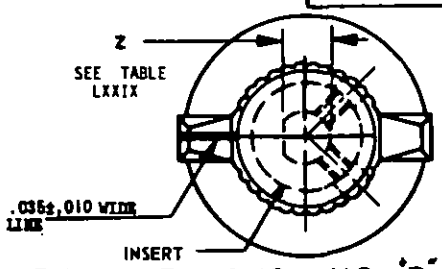

TOP VIEW SHOWING "D" FLAT SHAFT HOLE

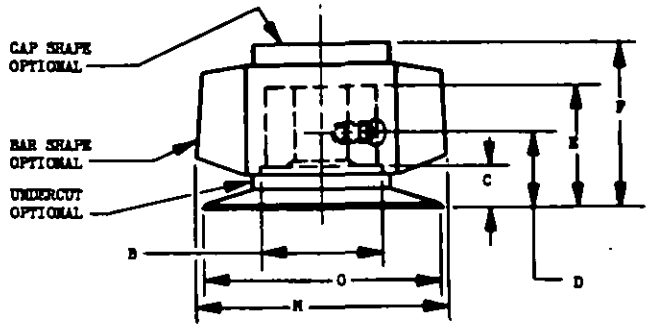


TABLE XIX - ROUND BAR DIAL SKIRT KNOBS

MS DASH NUMBER	SERIES	A +0.030 -0.010	NUT CLEARANCE B MIN	NUT CLEARANCE C MIN	D MAX	SHAFT HOLE DEPTH E MIN	F ±0.030	G MAX	M ±0.025	SET SCREWS (2 REQ'D) 1/8" SHAFT HOLE	SET SCREWS (2 REQ'D) 1/4" SHAFT HOLE
SEE TABLE XX	1	0.700	0.485	0.188	0.369	0.568	0.782	1.150	1.150	.112-40UNC-3A	.112-40UNC-3A

TABLE XX - MS DASH NUMBER

MS91528 - 1 II 2 B

SERIES	STYLE	SHAFT HOLE DIAMETER	COLOR
1	II--ROUND BAR DIAL SKIRTED WITH WHITE LINE	1--1/8" ROUND	B--BLACK
	LL--ROUND BAR DIAL SKIRTED WITH FLUORESCENT LINE	2--1/4" ROUND	G--GREY
	VV--ROUND BAR DIAL SKIRTED WITH PHOSPHORESCENT LINE	3--1/8" "D" FLAT	R--RED
		4--1/4" "D" FLAT	

NOTES:
1. STYLE LL AND VV KNOBS-THERMAL SHOCK SHALL BE IN ACCORDANCE WITH TEST CONDITION A, METHOD 107 OF MIL-STD-202.
2. FOR GENERAL NOTES SEE SHEET 47.

User activities:
Navy - CG, OS

Review activities:
Army - MI, AT, AV, EA, ME
Navy - MC, AS
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.


APPROVED 2 DEC 1955 REVISED ① For changes see sheets 15, 16, 29, 37, and 42

P.A.	EC	TITLE: KNOBS-CONTROL, PLASTIC (ROUND, CONCENTRIC, POINTER, SPINNER, SPINNER SLIP-CLUTCH, BAR, TACTILE, KNOB LOCK POINTER, SLIP-CLUTCH, AND KNOB LOCKS)	MILITARY STANDARD
Other Cust	ER 11		MS91528
PROCUREMENT SPECIFICATION MIL-K-3926		SUPERSEDES:	SHEET 10 OF 47


DD FORM 672-1 COORDINATED

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:22Z
Check the source to verify that this is the current version before use.

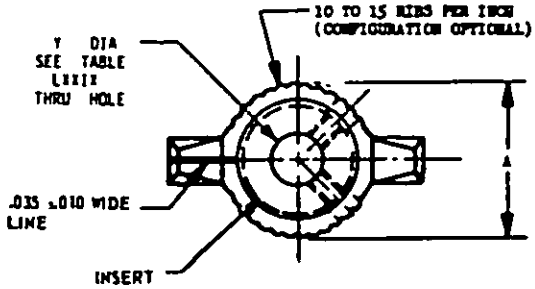

TOP VIEW SHOWING ROUND SHAFT HOLE

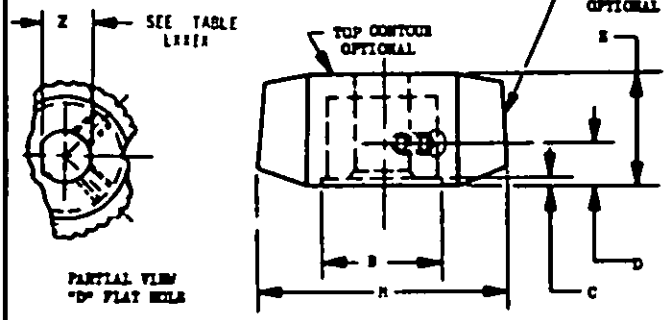

CONCENTRIC KNOBS CONSIST OF TWO SEPARATE PARTS; AN UPPER KNOB FOR THE INNER CONTROL SHAFT AND A LOWER KNOB FOR THE OUTER CONTROL SHAFT. EACH IS IDENTIFIED BY ITS OWN MS DASH NUMBER AND EACH MUST BE SPECIFIED AND ORDERED SEPARATELY. ONLY LOWER KNOBS FOR OUTER CONTROL SHAFTS ARE DETAILED ON THIS SHEET. UPPER KNOBS FOR INNER CONTROL SHAFTS SHOULD BE SPECIFIED AND SELECTED FROM AMONG THE 1/8 INCH SHAFT HOLE DIAMETER ROUND, RING SKIRT ROUND, ROUND TACTILE, AND RING SKIRT ROUND TACTILE KNOBS DETAILED ON SHEETS 1, 2, 30 AND 31.

ORDINARILY, SERIES 0 UPPER KNOBS ARE USED WITH SERIES 1 CONCENTRIC LOWER KNOBS; SIMILARLY, SERIES 1 AND SERIES 2 UPPER KNOBS ARE USED WITH SERIES 2 AND SERIES 3 CONCENTRIC LOWER KNOBS RESPECTIVELY.

TABLE XXI - ROUND BAR CONCENTRIC KNOBS

MS DASH NUMBER	SERIES	A +0.030 -0.010	KNT CLEARANCE B MIN	KNT CLEARANCE C MIN	D MAX	E ±0.015	M ±0.020	SET SCREWS (2 REQ'D) 1/8" SHAFT HOLE
SEE TABLE XXII	1	0.700	0.485	0.026	0.187	0.510	1.150	.112-40UNC-3A

TABLE XXII - MS DASH NUMBER

MS91528-1GG2BC

SERIES	STYLE	SHAFT HOLE DIAMETER	COLOR	KNOB FORM
1	GG--ROUND BAR WITH WHITE LINE JJ--ROUND BAR WITH FLUORESCENT LINE SS--ROUND BAR WITH PHOSPHORESCENT LINE	2--1/8" ROUND 6--1/8" "D" FLAT	B--BLACK G--GRAY R--RED	C--CONCENTRIC

NOTES:
1. STYLE JJ AND SS KNOBS-THERMAL SHOCK SHALL BE IN ACCORDANCE WITH TEST CONDITION A, METHOD 107 OF MIL-STD-202.
2. FOR GENERAL NOTES SEE SHEET 47.

APPROVED 2 DEC 1955 REVISED (1) For changes see sheets 15, 16, 29, 37, and 42

User activities: Navy - CG, OS

Review activities: Army - MI, AT, AV, EA, ME; Navy - MC, AS; DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A.	MC
Other Cust	ER
	11

TITLE: KNOBS-CONTROL, PLASTIC (ROUND, CONCENTRIC, POINTER, SPINNER, SPINNER SLIP-CLUTCH, BAR, TACTILE, KNOB LOCK POINTER, SLIP-CLUTCH, AND KNOB LOCKS)

MILITARY STANDARD

MS 91528


PROCUREMENT SPECIFICATION: MIL-K-3926

SUPERSEDES:


SHEET 11 OF 47

DD FORM 672-1 COORDINATED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:22Z
Check the source to verify that this is the current version before use.

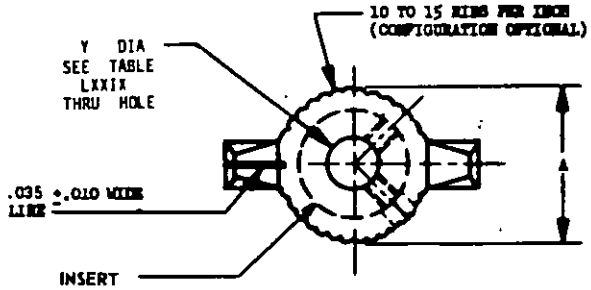

TOP VIEW SHOWING ROUND SHAFT HOLE

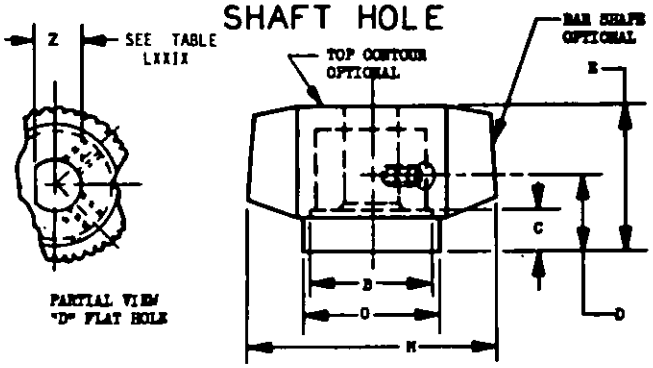

CONCENTRIC KNOBS CONSIST OF TWO SEPARATE PARTS; AN UPPER KNOB FOR THE INNER CONTROL SHAFT AND A LOWER KNOB FOR THE OUTER CONTROL SHAFT. EACH IS IDENTIFIED BY ITS OWN MS DASH NUMBER AND EACH MUST BE SPECIFIED AND ORDERED SEPARATELY. ONLY LOWER KNOBS FOR OUTER CONTROL SHAFTS ARE DETAILED ON THIS SHEET. UPPER KNOBS FOR INNER CONTROL SHAFTS SHOULD BE SPECIFIED AND SELECTED FROM AMONG THE 1/8 INCH SHAFT HOLE DIAMETER ROUND, RING SKIRT ROUND, ROUND TACTILE, AND RING SKIRT ROUND TACTILE KNOBS DETAILED ON SHEETS 1, 2, 30 AND 31.

ORDINARILY, SERIES 0 UPPER KNOBS ARE USED WITH SERIES 1 CONCENTRIC LOWER KNOBS; SIMILARLY, SERIES 1 AND SERIES 2 UPPER KNOBS ARE USED WITH SERIES 2 AND SERIES 3 CONCENTRIC LOWER KNOBS RESPECTIVELY.

TABLE XXIII - ROUND BAR CONCENTRIC RING SKIRT KNOBS

MS DASH	SERIES	A +0.030 -0.010	NUT CLEARANCE B MIN	NUT CLEARANCE C MIN	D MAX	E ±0.025	G MAX	N ±0.025	SET SCREWS (2 REQ'D) 1/4" SHAFT HOLE
SEE TABLE XXIV	1	0.700	0.685	0.188	0.369	0.690	0.680	1.250	.112-40UNC-3A

TABLE XXIV - MS DASH NUMBER

MS91528-1HH2BC

SERIES	SHAFT	SHAFT HOLE DIAMETER	COLOR	KNOB FORM
1	HH – ROUND BAR RING SKIRTED WITH WHITE LINE	2—1/4" ROUND	B—BLACK	C—CONCENTRIC
	KK – ROUND BAR RING SKIRTED WITH FLUORESCENT LINE	4—1/4" "D" FLAT	G—GRAY	
	PP – ROUND BAR RING SKIRTED WITH PHOSPHORESCENT LINE		R—RED	

NOTES:
1. STYLE KK AND PP KNOBS-THERMAL SHOCK SHALL BE IN ACCORDANCE WITH TEST CONDITION A, METHOD 107 OF MIL-STD-202.
2. FOR GENERAL NOTES SEE SHEET 47.

APPROVED 2 DEC. 1955 REVISED (1) For changes see sheets 15, 16, 29, 37, and 42


User activities:
Navy – CG, OS

Review activities:
Army – MI, AT, AV, EA, ME
Navy – MC, AS
DLA – IS


This military standard is approved for use by all Departments and Agencies of the Department of Defense Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:22Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5355

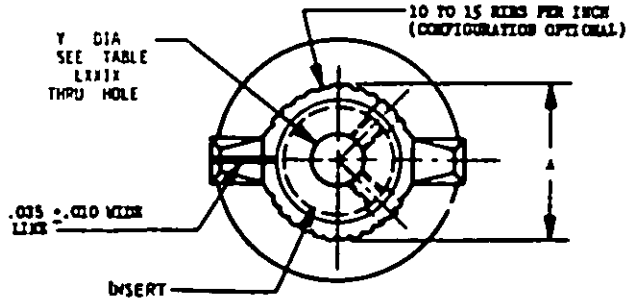

TOP VIEW SHOWING ROUND SHAFT HOLE

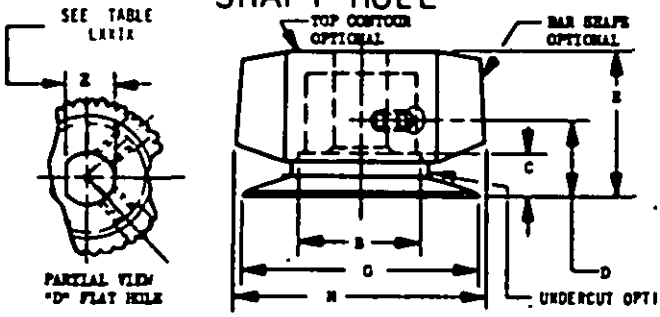

CONCENTRIC KNOBS CONSIST OF TWO SEPARATE PARTS, AN UPPER KNOB FOR THE INNER CONTROL SHAFT AND A LOWER KNOB FOR THE OUTER CONTROL SHAFT. EACH IS IDENTIFIED BY ITS OWN MS DASH NUMBER AND EACH MUST BE SPECIFIED AND ORDERED SEPARATELY. ONLY LOWER KNOBS FOR OUTER CONTROL SHAFTS ARE DETAILED ON THIS SHEET. UPPER KNOBS FOR INNER CONTROL SHAFTS SHOULD BE SPECIFIED AND SELECTED FROM AMONG THE 1/8 INCH SHAFT HOLE DIAMETER ROUND, RING SKIRT ROUND, ROUND TACTILE, AND RING SKIRT ROUND TACTILE KNOBS DETAILED ON SHEETS 1, 2, 30 AND 31.

ORDINARILY, SERIES 0 UPPER KNOBS ARE USED WITH SERIES 1 CONCENTRIC LOWER KNOBS; SIMILARLY, SERIES 1 AND SERIES 2 UPPER KNOBS ARE USED WITH SERIES 2 AND SERIES 3 CONCENTRIC LOWER KNOBS RESPECTIVELY.

TABLE XXV - ROUND BAR CONCENTRIC DIAL SKIRT KNOBS

MS DASH NUMBER	SERIES	A +0.030 −0.010	KNURL CLEARANCE B MIN	KNURL CLEARANCE C MIN	D MAX	E ±0.025	G MAX	N ±0.025	SET SCREWS (2 REQ'D) 1/8" SHAFT HOLE
SEE TABLE XXVI	1	0.700	0.685	0.188	0.369	0.690	1.150	1.150	.112-40UNC-3A

TABLE XXVI - MS DASH NUMBER

MS91528-1 II 2 B C

SERIES	STYLE	SHAFT HOLE DIAMETER	COLOR	KNOB FORM
1	II – ROUND BAR DIAL SKIRTED WITH WHITE LINE	2—1/8" ROUND	B—BLACK	C—CONCENTRIC
	LL – ROUND BAR DIAL SKIRTED WITH FLUORESCENT LINE	5—1/8" "D" FLAT	G—GRAY	
	VV – ROUND BAR DIAL SKIRTED WITH PHOSPHORESCENT LINE		R—RED	

NOTES:
1. STYLE LL AND VV KNOBS-THERMAL SHOCK SHALL BE IN ACCORDANCE WITH TEST CONDITION A, METHOD 107 OF MIL-STD-202.
2. FOR GENERAL NOTES SEE SHEET 47.

APPROVED 2 DEC 1955 REVISED (J) for changes see sheets 15, 16, 29, 37, and 42

User activities: Navy – CG, OS

Review activities: Army – MI, AT, AV, EA, ME Navy – MC, AS DLA – 15

This military standard is approved for use by all Departments and Agencies of the Department of Defense Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A.	MC
Other Cust	ER
	11

TITLE: KNOBS-CONTROL, PLASTIC (ROUND, CONCENTRIC, POINTER, SPINNER, SPINNER SLIP-CLUTCH, BAR, TACTILE, KNOB LOCK POINTER, SLIP-CLUTCH, AND KNOB LOCKS)

MILITARY STANDARD

MS 91528

PROCUREMENT SPECIFICATION: MIL-K-3926

SUPERSEDES:

SHEET 13 OF 0

DD FORM 672-1 COORDINATED

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:22Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5355

User activities:
Navy - CG, OS

Review activities:
Army - MI, AT, AV, EA, ME
Navy - MC, AS
DLA - IS

REQUIREMENTS: FOR SHEETS 1 THRU 13		
DASH NO.	TESTS MIL-K-3926	EXTENT OF APPROVAL
1F2G	TABLE II GROUPS I, II, III, IV AND V	ALL
5D2B	TABLE II GROUPS I, II, III, IV AND V	ALL
2Q2G	TABLE II GROUPS I, II, III, IV AND V	ALL

IF PART NUMBER SPECIFIED IS NOT MANUFACTURED, REQUEST ALTERNATE NUMBER FROM GOVERNMENT.

APPROVED 2 DEC 1955 REVISED (J) for changes see sheets 15, 16, 29, 37, and 42


This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A. EC Other Cust ER 11	TITLE KNOBS-CONTROL, PLASTIC (ROUND, CONCENTRIC, POINTER, SPINNER, SPINNER SLIP-CLUTCH, BAR, TACTILE, KNOB LOCK POINTER, SLIP-CLUTCH, AND KNOB LOCKS)	MILITARY STANDARD MS 91528
PROCUREMENT SPECIFICATION MIL-K-3926	SUPERSEDES:	SHEET 14 OF 47


DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:22Z
Check the source to verify that this is the current version before use.

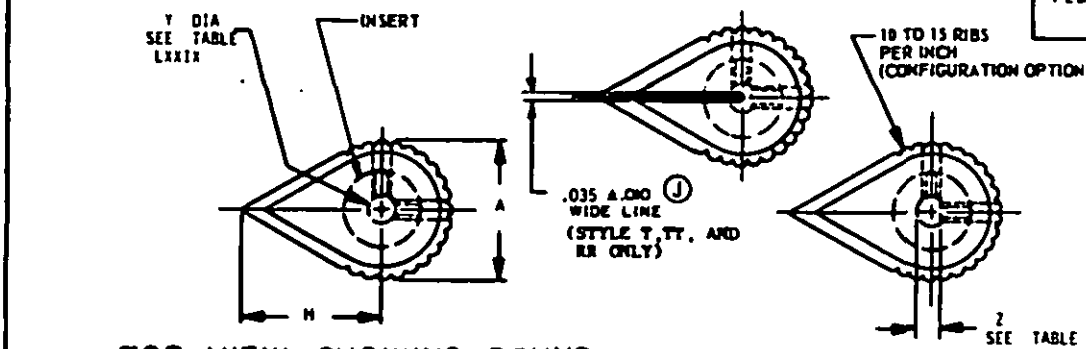

TOP VIEW SHOWING ROUND SHAFT HOLE

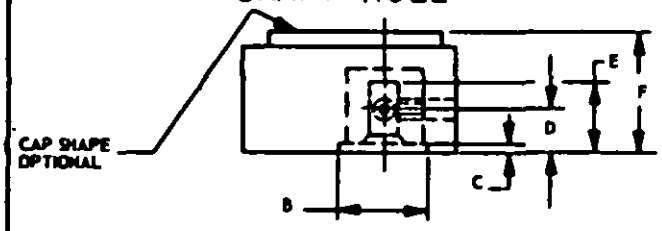

TOP VIEW SHOWING 'D' FLAT SHAFT HOLE

TABLE XXVII-POINTER KNOBS

MS DASH NUMBER	SERIES	A +0.030 -0.010	KNOB CLEARANCE B MIN	KNOB CLEARANCE C MIN	D* +MAX	SHAFT HOLE DEPTH E MIN	F ± 0.030	M +0.025 -0.005	SET SCREWS (2 REQ'D) 1/8" SHAFT HOLE	SET SCREWS (2 REQ'D) 1/4" SHAFT HOLE
SEE TABLE XXVIII	0	0.500	0.420	0.026	0.158	0.405	0.510	0.490	.112-40UNC-3A	.112-40UNC-3A
	1	0.700	0.485	0.026	0.187	0.405	0.610	0.680	.112-40UNC-3A	.112-40UNC-3A
	2	0.900	0.640	0.114	0.260	0.520	0.790	0.885	.112-40UNC-3A	.164-32UNC-3A

TABLE XXVIII-MS DASH NUMBER

MS91528 - 2 P 2 B

SERIES	STYLE	SHAFT HOLE DIAMETER	COLOR
0	P - PLAIN POINTER	1 - 1/8" ROUND	B - BLACK
1	T - PLAIN POINTER WITH WHITE LINE	2 - 1/4" ROUND	G - GRAY
2	TT - PLAIN POINTER WITH FLUORESCENT LINE	3 - 1/8" "D" FLAT	R - RED
	RR - PLAIN POINTER WITH PHOSPHORESCENT LINE	4 - 1/4" "D" FLAT	

NOTES:
1. STYLE TT AND RR KNOBS-THERMAL SHOCK SHALL BE IN ACCORDANCE WITH TEST CONDITION A, METHOD 107, MIL-STD-202.
2. FOR GENERAL NOTES SEE SHEET 47.

APPROVED 2 DEC 1955 REVISED (J) For changes see sheets 15, 16, 29, 37, and 42

User activities:
Navy - CG, OS


Review activities:
Army - MI, AT, AV, EA, ME
Navy - MC, AS
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.


P.A.	TITLE	MILITARY STANDARD
DC Other Cust ER 11	KNOBS-CONTROL, PLASTIC (ROUND, CONCENTRIC, POINTER, SPINNER, SPINNER SLIP-CLUTCH, BAR, TACTILE, KNOB LOCK POINTER, SLIP-CLUTCH, AND KNOB LOCKS)	MS 91528
PROCUREMENT SPECIFICATION MIL-K-3926	SUPERSEDES	SHEET 15 OF 47

COORDINATED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:22Z
Check the source to verify that this is the current version before use.

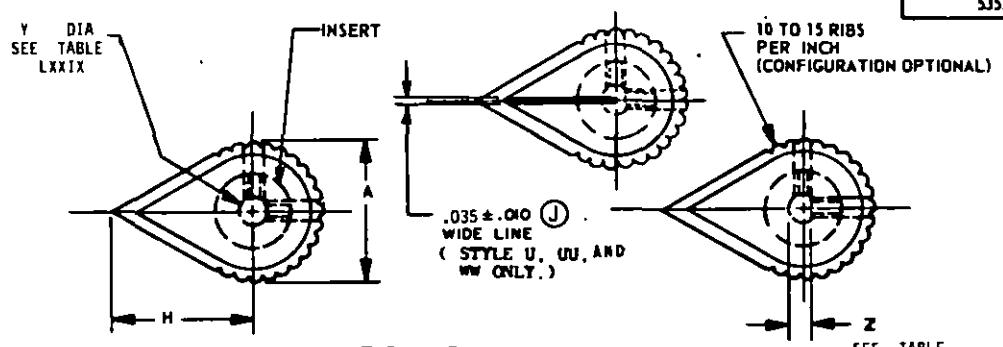

TOP VIEW SHOWING ROUND SHAFT HOLE

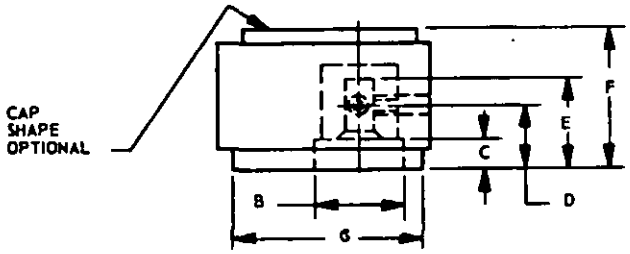

TOP VIEW SHOWING "D" FLAT SHAFT HOLE

TABLE XXIX - POINTER RING SKIRT KNOBS

MS DASH NUMBER	SERIES	A +0.030 −0.010	NUT CLEARANCE B MIN	NUT CLEARANCE C MIN	D MAX	SHAFT HOLE DEPTH E MIN	F ±0.030	G MAX	H +0.025 −0.005	SET SCREWS (2 REQ'D) 1/8" SHAFT HOLE	SET SCREWS (2 REQ'D) 1/4" SHAFT HOLE
SEE TABLE XXX	0	0.600	0.300	0.177	0.325	0.560	0.655	0.690	0.490	.112-40UNC-3A	.112-40UNC-3A
	1	0.700	0.485	0.188	0.369	0.568	0.782	1.000	0.680	.112-40UNC-3A	.112-40UNC-3A
	2	0900	0.640	0.320	0.484	0.730	1.010	1.345	0.885	.112-40UNC-3A	.164-32UNC-3A

TABLE XXX - MS DASH NUMBER

MS 91528-2K2B

SERIES	STYLE	SHAFT HOLE DIAMETER	COLOR
0 1 2	K - SKIRTED POINTER U - SKIRTED POINTER WITH WHITE LINE UU - SKIRTED POINTER WITH FLUORESCENT LINE WW - SKIRTED POINTER WITH PHOSPHORESCENT LINE	1 - 1/8" ROUND 2 - 1/4" ROUND 3 - 1/8" "D" FLAT 4 - 1/4" "D" FLAT	B - BLACK G - GRAY R - RED

NOTES:
1. STYLE VV AND WW KNOBS-THERMAL SHOCK SHALL BE IN ACCORDANCE WITH TEST CONDITION A, METHOD 107, MIL-STD-202.
2. FOR GENERAL NOTES SEE SHEET 47.

APPROVED 2 DEC 1955 REVISED (1) For changes see sheets 15, 16, 29, 37, and 42

User activities: Navy - CG, OS

Review activities: Army - MI, AT, AV, EA, ME Navy - MC, AS DLA - IS


This military standard is approved for use by all Departments and Agencies of the Department of Defense Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A. EC Other Cust ER 11	TITLE: KNOBS-CONTROL, PLASTIC (ROUND, CONCENTRIC, POINTER, SPINNER, SPINNER SLIP-CLUTCH, BAR, TACTILE, KNOB LOCK POINTER, SLIP-CLUTCH, AND KNOB LOCKS)	MILITARY STANDARD MS 91528
PROCUREMENT SPECIFICATION MIL-K-3926	SUPERSEDES:	SHEET 16 OF 47


COORDINATED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:22Z
Check the source to verify that this is the current version before use.


FED. SUP CLASS
5355

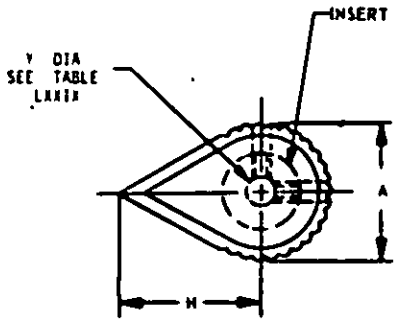

TOP VIEW SHOWING ROUND SHAFT HOLE

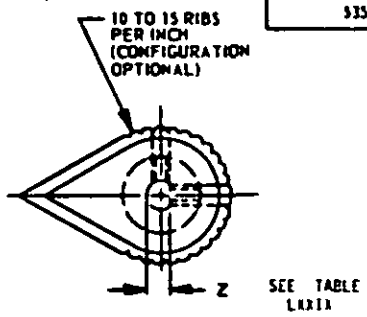

TOP VIEW SHOWING "D" FLAT SHAFT HOLE

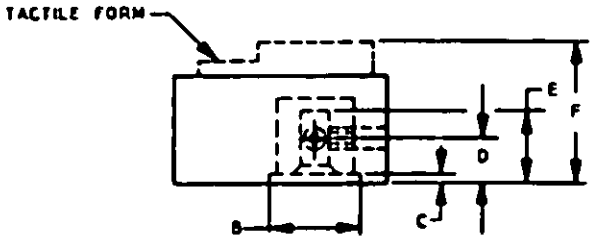




TABLE XXXI - POINTER TACTILE KNOBS

MS DASH NUMBER	SERIES	A +0.030 -0.010	NUT CLEARANCE B MIN	NUT CLEARANCE C MIN	D MAX	SHAFT HOLE DEPTH E MIN	F ± 0.050	H +0.075 -0.005	SET SCREWS (2 REQD) 1/8" SHAFT HOLE	SET SCREWS (2 REQD) 1/4" SHAFT HOLE
SEE TABLE XXXII	1	0.700	0.435	0.026	0.187	0.405	0.900	0.680	.112-40 UNC-3A	.112-40 UNC-3A
	2	0900	0.640	0.114	0.290	0.520	1.155	0.885	.112-40 UNC-3A	.164-32 UNC-3A

TABLE XXXII - MS DASH NUMBER

MS91528-2P2B7

SERIES	STYLE	SHAFT HOLE DIAMETER	COLOR	TACTILE FORM
1 2	P - PLAIN POINTER	1 - 1/8" ROUND 2 - 1/4" ROUND 3 - 1/8" "D" FLAT 4 - 1/4" "D" FLAT	B - BLACK G - GRAY R - RED	7 - FORM 7

NOTES:
1. FOR TACTILE FORM DIMENSIONS, SEE SHEET 33.
2. FOR GENERAL NOTES SEE SHEET 47.

Using activities:
Navy - CG, OS

Review activities:
Army - MI, AT, AV, EA, ME
Navy - MC, AS
DLA - IS


This military standard is approved for use by all Departments and Agencies of the Department of Defense Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 2 DEC 1955 REVISED (1) for changes see sheets 15, 16, 29, 37, and 42


P.A. DC Other Cust ER 11	TITLE KNOBS-CONTROL, PLASTIC (ROUND, CONCENTRIC, POINTER, SPINNER, SPINNER SLIP-CLUTCH, BAR, TACTILE, KNOB LOCK POINTER, SLIP-CLUTCH, AND KNOB LOCKS)	MILITARY STANDARD MS91528
PROCUREMENT SPECIFICATION MIL-K-3926	SUPERSEDES	SHEET 17 OF #

COORDINATED


Source: https://assist.dla.mil -- Downloaded: 20260-26T07:22Z
Check the source to verify that this is the current version before use.

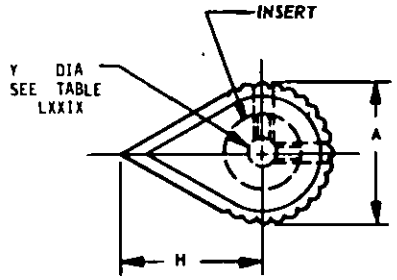

TOP VIEW SHOWING ROUND SHAFT HOLE

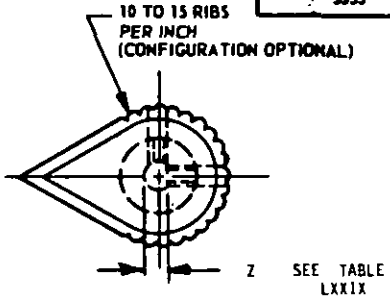

TOP VIEW SHOWING "D" FLAT SHAFT HOLE

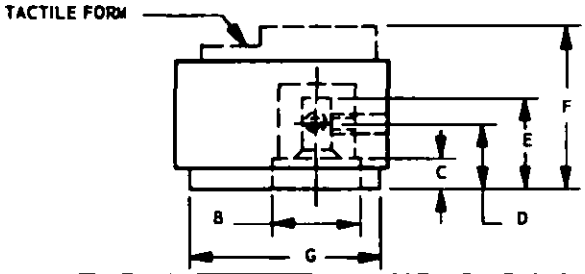




TABLE XXXIII POINTER RING SKIRT TACTILE KNOBS

MS DASH NUMBER	SERIES	A +0.030 −0.010	NUT CLEARANCE B MIN	NUT CLEARANCE C MIN	D MAX	SHAFT HOLE DEPTH E MIN	F ± 0.050	G MAX	H +0.015 −0.005	SET SCREWS (2 REQD) 1/8" SHAFT HOLE	SET SCREWS (2 REQD) 1/4" SHAFT HOLE
SEE TABLE XXXIV	1	0.700	0.485	0.188	0.369	0.568	1.075	1.000	0.680	112-40 UNC-3A	112-40 UNC-3A
	2	0900	0.440	0.320	0.484	0.730	1.375	1.345	0.885	112-40 UNC-3A	164-32 UNC-3A

TABLE XXXIV MS DASH NUMBER

MS91528-2K2B7

SERIES	STYLE	SHAFT HOLE DIAMETER	COLOR	TACTILE FORM
1 2	K - SKIRTED POINTER	1 - 1/8" ROUND 2 - 1/4" ROUND 3 - 1/8" "D" FLAT 4 - 1/4" "D" FLAT	B - BLACK G - GRAY R - RED	7 - FORM 7

NOTES:
1. FOR TACTILE FORM DIMENSIONS, SEE SHEET 33.
2. FOR GENERAL NOTES, SEE SHEET 47.


User activities:
Navy - CG, OS

Review activities:
Army - MI, AT, AV, EA, ME
Navy - MC, AS
DLA - IS


This military standard is approved for use by all Departments and Agencies of the Department of Defense Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 2 DEC. 1955 REVISED (J) For changes see sheets 15, 16, 29, 37, and 42


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:22Z
Check the source to verify that this is the current version before use.

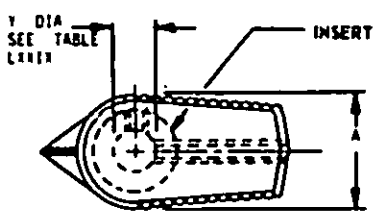

TOP VIEW SHOWING ROUND SHAFT HOLE

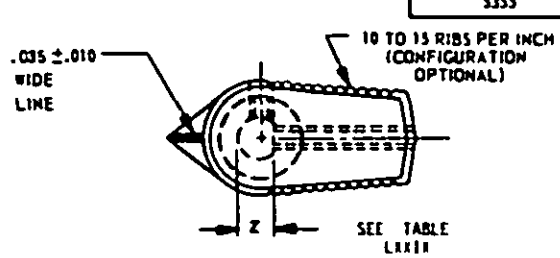

TOP VIEW SHOWING 'D' FLAT SHAFT HOLE

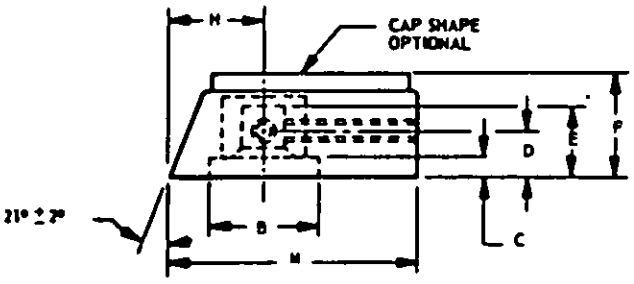

User activities:
Navy - CG, OS

Review activities:
Army - MI, AT, AV, EA, ME
Navy - MC, AS
DLA - IS

TABLE XXXV - BAR KNOBS

MS DASH NUMBER	SERIES	A +0.000 -0.010	KNURL CLEARANCE B MIN	KNURL CLEARANCE C MIN	D MAX	SHAFT CLEARANCE E MIN	F ± 0.015	H MAX	M MAX	SET SCREWS (2 REQD) 1/4" SHAFT HOLE
SEE TABLE XXXVI	1	0.700	0.515	0.110	0.250	0.445	0.645	0.575	1.515	.164-32UNC-3A

TABLE XXXVI - MS DASH NUMBER

MS91528-1A2B

SERIES	STYLE	SHAFT HOLE DIAMETER	COLOR
1	A - BAR WITH WHITE LINE W - BAR WITH FLUORESCENT LINE XA - BAR WITH PHOSPHORESCENT LINE	2 - 1/4" ROUND 4 - 1/4" "D" FLAT	B - BLACK G - GRAY R - RED

NOTES:
1. STYLE W AND XA KNOBS-THERMAL SHOCK SHALL BE IN ACCORDANCE WITH TEST CONDITION A, METHOD 107 OF MIL-STD-202.
2. FOR GENERAL NOTES SEE SHEET 47.


APPROVED 2 DEC 1955 REVISED (3) for changes see sheets 15, 16, 29, 37, and 42

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.


P.A. MC Other Cust ER 11	TITLE: KNOBS-CONTROL, PLASTIC (ROUND, CONCENTRIC, POINTER, SPINNER, SPINNER SLIP-CLUTCH, BAR, TACTILE, KNOB LOCK POINTER, SLIP-CLUTCH, AND KNOB LOCKS)	MILITARY STANDARD MS 91528
PROCUREMENT SPECIFICATION MIL-K-[illegible]	SUPERSEDES:	SHEET 19 OF 47

COORDINATED


Source: https://assist.dla.mil -- Downloaded: 20260-26T07:22Z
Check the source to verify that this is the current version before use.

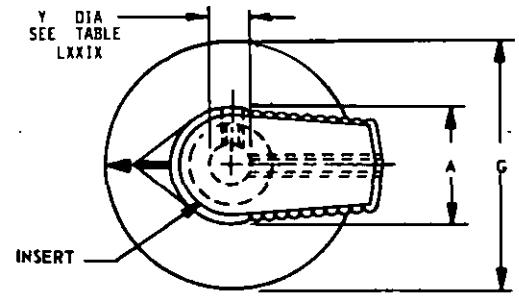

TOP VIEW SHOWING ROUND SHAFT HOLES

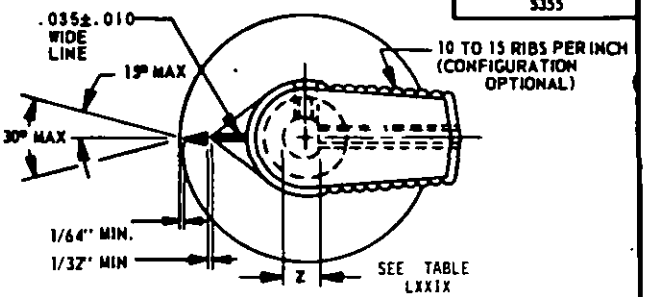

TOP VIEW SHOWING "D" FLAT SHAFT HOLE

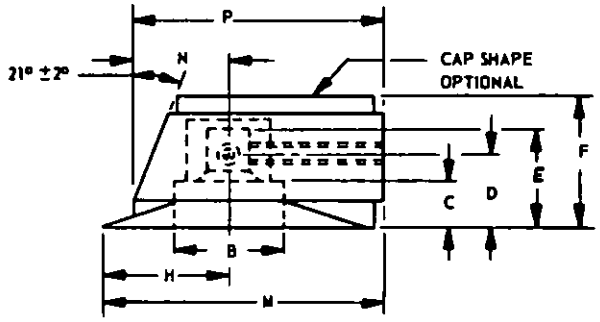

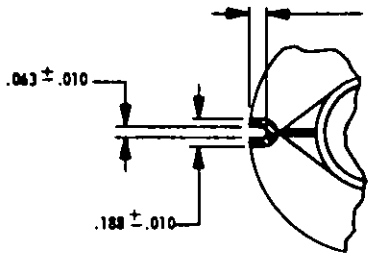


TABLE XXXVII-BAR DIAL SKIRT KNOBS

MS DASH NUMBER	SERIES	A +0.030 -0.010	NUT CLEARANCE B MIN.	NUT CLEARANCE C MIN	D MAX	SHAFT CLEARANCE E MIN	F ±0.025	G MAX	H MAX	M MAX	N MAX	P MAX	SET SCREWS (2 REQ'D) 1/4" SHAFT HOLE
SEE TABLE XXXVIII	1	0.700	0.515	0.266	0.435	0.590	0.816	1.529	0.780	1.720	0.890	1.520	.164-32 UNC-3A

TABLE XXXVIII-MS DASH NUMBER

MS 91528-1B2B

SERIES	STYLE	SHAFT HOLE DIAMETER	COLOR
1	B - DIAL SKIRTED BAR WITH WHITE LINE AND WHITE ARROW. R - DIAL SKIRTED BAR WITH WHITE LINE AND SLOT. V - DIAL SKIRTED BAR WITH WHITE LINE AND TRANSLUCENT ARROW. X - DIAL SKIRTED BAR WITH FLUORESCENT LINE AND FLUORESCENT ARROW. Y - DIAL SKIRTED BAR WITH FLUORESCENT LINE AND SLOT. Z - DIAL SKIRTED BAR WITH FLUORESCENT LINE AND TRANSLUCENT ARROW. AB - DIAL SKIRTED BAR WITH PHOSPHORESCENT LINE AND PHOSPHORESCENT ARROW. AC - DIAL SKIRTED BAR WITH PHOSPHORESCENT LINE AND SLOT. AD - DIAL SKIRTED BAR WITH PHOSPHORESCENT LINE AND TRANSLUCENT ARROW.	2 - 1/4" ROUND 4 - 1/4" "D" FLAT	B - BLACK G - GRAY R - RED

NOTES:
1. STYLE X, Y, Z, AB, AC AND AD KNOBS-THERMAL SHOCK SHALL BE IN ACCORDANCE WITH TEST CONDITION A, METHOD 107 OF MIL-STD-202.
2. FOR GENERAL NOTES SEE SHEET 47.


APPROVED 2 DEC 1955 REVISED ① For changes see sheets 15, 16, 29, 37, and 42

User activities: Navy - CG, OS
Review activities: Army - MI, AT, AV, EA, ME Navy - MC, AS DLA - 15
"This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable."


P.A. EC Other Cust ER 11	TITLE KNOBS-CONTROL, PLASTIC (ROUND, CONCENTRIC, POINTER, SPINNER, SPINNER SLIP-CLUTCH, BAR, TACTILE, KNOB LOCK POINTER, SLIP-CLUTCH, AND KNOB LOCKS)	MILITARY STANDARD MS 91528
PROCUREMENT SPECIFICATION MIL-K-3926	SUPERSEDES:	SHEET 20 OF 47

COORDINATED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:22Z
Check the source to verify that this is the current version before use.

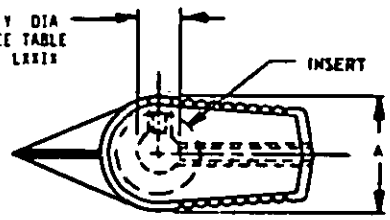

TOP VIEW SHOWING ROUND SHAFT HOLE

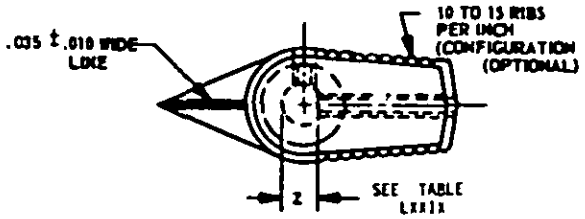

TOP VIEW SHOWING "D" FLAT SHAFT HOLE

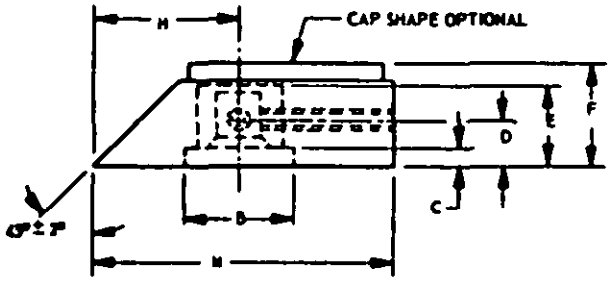


TABLE XXXIX-BAR ANTI-PARALLAX KNOBS

MS DASH NUMBER	SERIES	A +0.000 −0.010	NUT CLEARANCE B MIN	NUT CLEARANCE C MIN	D MAX	SHAFT HOLE DEPTH E MIN	F ± 0.015	H MAX	M MAX	SET SCREWS (2 REQ'D) 1/4" SHAFT HOLE
SEE TABLE XL	2	0.700	0.595	0.110	0.250	0.445	0.645	0.900	1.055	.164-32 UNC-3A

TABLE XL - MS DASH NUMBER

MS91528-2L2B

SERIES	STYLE	SHAFT HOLE DIAMETER	COLOR
2	L - BAR WITH WHITE LINE W - BAR WITH FLUORESCENT LINE XX - BAR WITH PHOSPHORESCENT LINE	2 - 1/4" ROUND 4 - 1/4" "D" FLAT	B - BLACK G - GRAY R - RED

NOTES:
1. STYLE W AND XX KNOBS-THERMAL SHOCK SHALL BE IN ACCORDANCE WITH TEST CONDITION A, METHOD 107 OF MIL-STD-202.
2. FOR GENERAL NOTES SEE SHEET 47.

APPROVED 2 DEC 1955 REVISED (J) For changes see sheets 15, 16, 29, 37, and 42

User activities: Navy - CG, OS


Review activities: Army - MI, AT, AV, EA, ME Navy - MC, AS DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.


P.A. MC Other Cust ER 11	TITLE: KNOBS-CONTROL, PLASTIC (ROUND, CONCENTRIC, POINTER, SPINNER, SPINNER SLIP-CLUTCH, BAR, TACTILE, KNOB LOCK POINTER, SLIP-CLUTCH, AND KNOB LOCKS)	MILITARY STANDARD MS 91528
PROCUREMENT SPECIFICATION MIL-K-3926	SUPERSEDES	SHEET 21 OF 47

COORDINATED

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:22Z
Check the source to verify that this is the current version before use.

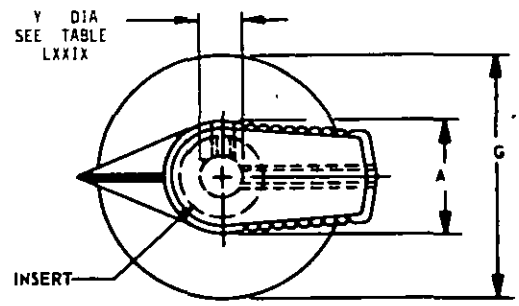

TOP VIEW SHOWING ROUND SHAFT HOLE

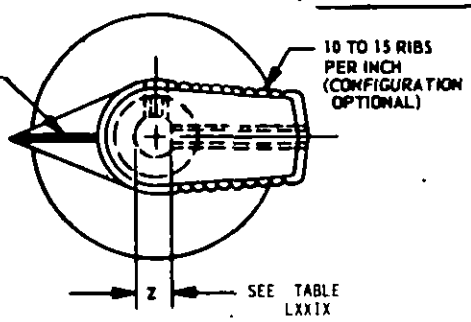

TOP VIEW SHOWING "D" FLAT SHAFT HOLE

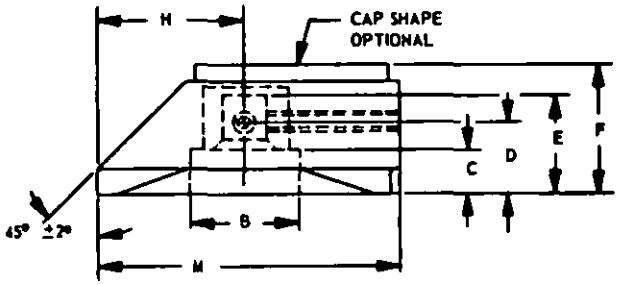


TABLE XLI BAR ANTI-PARALLAX DIAL SKIRT KNOBS

MS DASH NUMBER	SERIES	A +0.030 -0.010	NUT CLEARANCE B MIN	NUT CLEARANCE C MIN	D MAX	SHAFT HOLE DEPTH E MIN	F ±0.025	G MAX	H MAX	M MAX	SET SCREWS (2 REQ'D) 1/4" SHAFT HOLE
SEE TABLE XLII	2	0.700	0.470	0.266	0.438	0.590	0.818	1.520	0.918	1.870	.164-32 UNC-3A

TABLE XLII - MS DASH NUMBER

MS91528 - 2M2B

SERIES	STYLE	SHAFT HOLE DIAMETER	COLOR
2	M - DIAL SKIRTED BAR WITH WHITE LINE ZZ - DIAL SKIRTED BAR WITH FLUORESCENT LINE YY - DIAL SKIRTED BAR WITH PHOSPHORESCENT LINE	2 - 1/4" ROUND 4 - 1/4" "D" FLAT	B - BLACK G - GRAY R - RED

NOTES:
1. STYLE ZZ AND YY KNOBS-THERMAL SHOCK SHALL BE IN ACCORDANCE WITH TEST CONDITION A, METHOD 107 OF MIL-STD-202.
2. FOR GENERAL NOTES SEE SHEET 47.

User activities:
Navy - CG, OS

Review activities:
Army - MI, AT, AV, EA, ME
Navy - MC, AS
DLA - IS


This military standard is approved for use by all Departments and Agencies of the Department of Defense Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 2 DEC 1955 REVISED (1) For changes see sheets 15, 16, 29, 37, and 42


P.A. DC	TITLE KNOBS-CONTROL, PLASTIC (ROUND, CONCENTRIC, POINTER, SPINNER, SPINNER SLIP-CLUTCH, BAR, TACTILE, KNOB LOCK POINTER, SLIP-CLUTCH, AND KNOB LOCKS)	MILITARY STANDARD
Other Cust ER 11		MS 91528
PROCUREMENT SPECIFICATION MIL-K-3926	SUPERSEDES:	SHEET 22 OF 47

COORDINATED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:22Z
Check the source to verify that this is the current version before use.

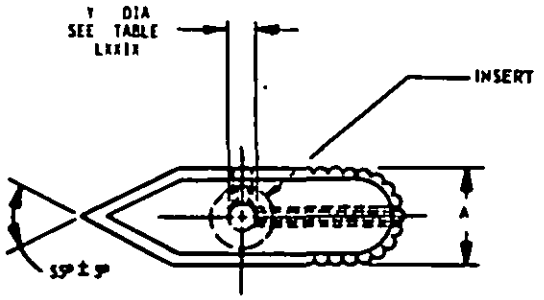

TOP VIEW SHOWING ROUND SHAFT HOLE

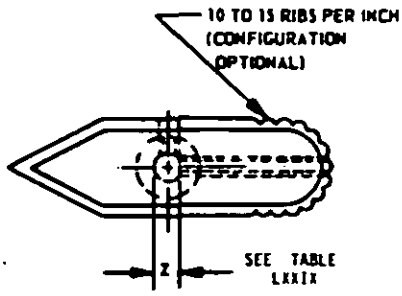

TOP VIEW SHOWING "D" FLAT SHAFT HOLE

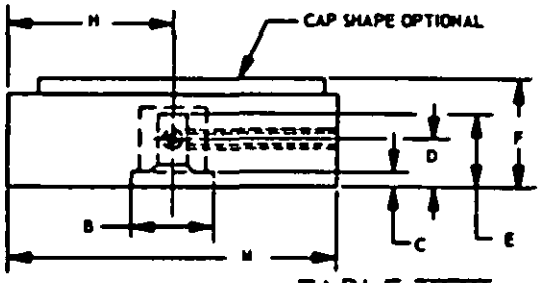


TABLE XLIII - BAR KNOBS

MS DASH NUMBER	SERIES	A MAX	NUT CLEARANCE B MIN	NUT CLEARANCE C MIN	D MAX	SHAFT HOLE DEPTH E MIN	F MAX	M MAX	N MAX	SET SCREWS (2 REQ'D) 1/4" SHAFT HOLE
SEE TABLE XLIV	3	0.788	0.562	0.177	0.348	0.739	0.869	1.290	2.552	.164-32 UNC-3A

TABLE XLIV - MS DASH NUMBER

MS91528-3R2B

SERIES	STYLE	SHAFT HOLE DIAMETER	COLOR
3	R - BAR	2 - 1/4" ROUND 4 - 1/4" "D" FLAT	B - BLACK G - GRAY R - RED

NOTES:
1. FOR GENERAL NOTES SEE SHEET 47.

User activities:
Navy - CG, OS

Review activities:
Army - MI, AT, AV, EA, ME
Navy - MC, AS
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 2 DEC 1955 REVISED (3) for changes see sheets 15, 16, 29, 31, and 42

P.C. Other Cust ER	TITLE KNOBS-CONTROL, PLASTIC (ROUND, CONCENTRIC, POINTER, SPINNER, SPINNER SLIP-CLUTCH, BAR, TACTILE, KNOB LOCK POINTER, SLIP-CLUTCH, AND KNOB LOCKS)	MILITARY STANDARD MS 91528
11		
PROCUREMENT SPECIFICATION MIL-K-3926	SUPERSEDES	SHEET 23 OF 47

COORDINATED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:22Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5355

REQUIREMENTS: FOR SHEETS 15 THRU 23		
DASH NO.	TESTS MIL-K-3926	EXTENT OF APPROVAL
1U2B	TABLE II GROUPS I, II, III, IV AND V	ALL
2K2B7	TABLE II GROUPS I, II, III, IV AND V	ALL
1R4B	TABLE II GROUPS I, II, III, IV AND V	ALL
3R2B	TABLE II GROUPS I, II, III, IV AND V	ALL

IF PART NUMBER SPECIFIED IS NOT MANUFACTURED, REQUEST ALTERNATE NUMBER FROM GOVERNMENT.

APPROVED 2 DEC 1955 REVISED ① For changes see sheets 15, 16, 29, 37, and 42

User activities
Navy – CG, OS

Review activities:
Army – MI, AT, AV, EA, ME, AS
Navy – MC
DLA – 15


This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A. EC Other Cust ER 11	TITLE KNOBS-CONTROL, PLASTIC (ROUND, CONCENTRIC, POINTER, SPINNER, SPINNER SLIP-CLUTCH, BAR, TACTILE, KNOB LOCK POINTER, SLIP-CLUTCH, AND KNOB LOCKS)	MILITARY STANDARD MS 91528	
PROCUREMENT SPECIFICATION MIL-K-3926	SUPERSEDES:	SHEET 24 OF 47	


DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:22Z
Check the source to verify that this is the current version before use.

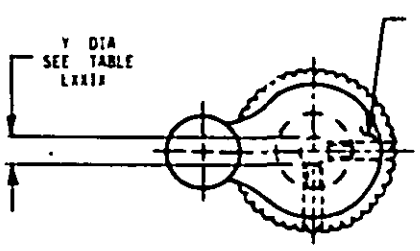

TOP VIEW SHOWING ROUND SHAFT HOLE

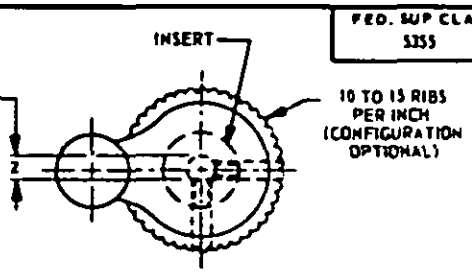

TOP VIEW SHOWING "D" FLAT SHAFT HOLE


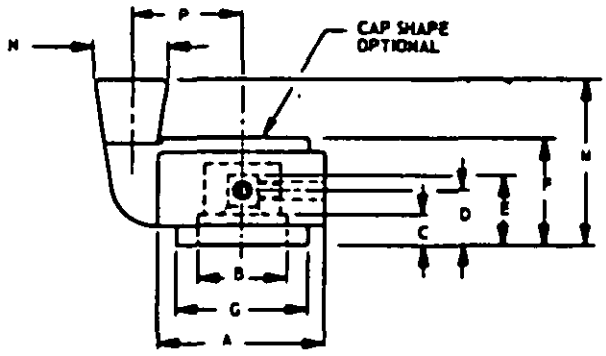


TABLE XLV - SPINNER KNOBS

MS DASH NUMBER	SERIES	A +0.000 -0.010	NUT CLEARANCE B MIN.	NUT CLEARANCE C MIN.	D MAX.	SHAFT HOLE DEPTH E MIN.	F ±0.030	G MAX.	M ±0.050	N ±0.025	P ±0.015	SET SCREWS (2 REQ'D) 1/4" SHAFT HOLE
SEE TABLE XLVI	3	1.250	0.685	0.250	0.427	0.605	0.850	1.185	1.350	0.580	0.800	.164-32UNC-3A
	4	1.750	0.685	0.320	0.489	0.760	1.070	1.690	1.758	0.780	1.094	.164-32UNC-3A
	5	2.250	0.685	0.320	0.489	0.748	1.095	2.185	1.782	0.780	1.344	.164-32UNC-3A

TABLE XLVI - MS DASH NUMBER

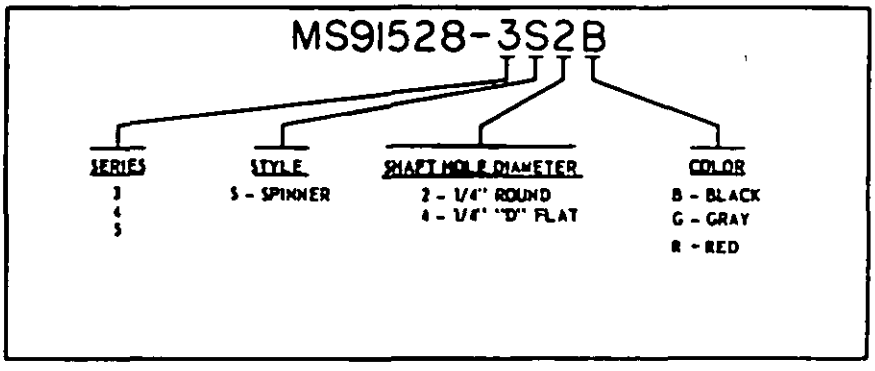

NOTES:
1. FOR GENERAL NOTES SEE SHEET 47.


User activities:
Navy - CG, OS

Review activities:
Army - MI, AT, AV, EA, ME
Navy - MC, AS
DLA - 15


This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 2 DEC 1955 REVISED ① For changes see sheets 15, 16, 29, 37, and 42

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:22Z
Check the source to verify that this is the current version before use.

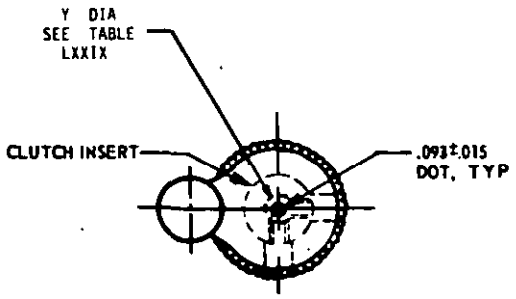

TOP VIEW SHOWING ROUND SHAFT HOLE

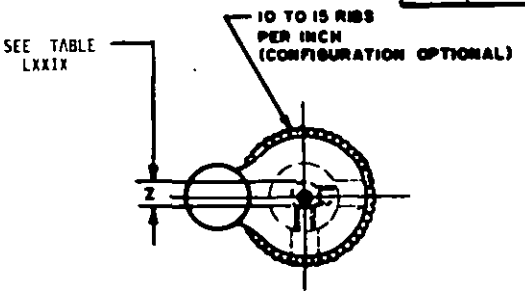

TOP VIEW SHOWING "D" FLAT SHAFT HOLE

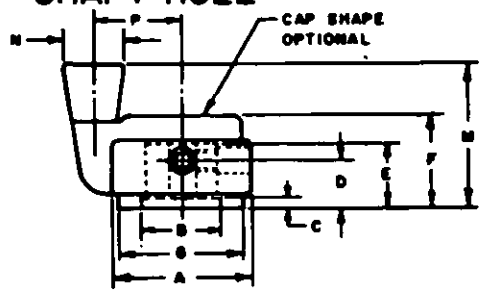


TABLE XLVII-SPINNER SLIP CLUTCH KNOBS

MS DASH NUMBER	SERIES	A +0.030 -0.010	NUT CLEARANCE B MIN	NUT CLEARANCE C MIN	D MAX	SHAFT HOLE DEPTH E MIN	F ±0.030	G MAX	M ±0.050	N ±0.025	P ±0.015	SET SCREWS (2 REQ'D) 1/4" SHAFT HOLE	CLUTCH SLIP TORQUE INCH-OUNCES
SEE TABLE XLVIII	3	1.250	0.750	0.250	.440	.600	1.040	1.185	1.520	0.580	0.800	.164-32UNC-3A	28-56
	4	1.750	0.750	0.320	.500	.740	1.070	1.690	1.758	0.780	1.094	.164-32UNC-3A	42-84
	5	2.250	0.750	0.320	.500	.740	1.095	2.185	1.782	0.780	1.344	.164-32UNC-3A	64-124

TABLE XLVIII - MS DASH NUMBER

MS91528-3 SC 2 B


SERIES	STYLE	SHAFT HOLE DIAMETER	COLOR
3 4 5	SC – SPINNER SLIP-CLUTCH WITH WHITE DOT SD – SPINNER SLIP-CLUTCH WITH FLUORESCENT DOT SE – SPINNER SLIP-CLUTCH WITH PHOSPHORESCENT DOT	2 – 1/4" ROUND 4 – 1/4" D FLAT	B – BLACK G – GRAY R – RED

NOTES:
1. TORQUE REQUIREMENTS OF MIL-K-3926 NOT APPLICABLE.
2. FOR GENERAL NOTES SEE SHEET 47.


APPROVED 2 DEC 1955 REVISED (J) For changes see sheets 15, 16, 29, 37, and 42

User activities: Navy – CG, OS
Review activities: Army – MI, AT, AV, EA, ME
Navy – MC, AS
DLA – IS
This military standard is approved for use by all Departments and Agencies of the Department of Defense Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:22Z
Check the source to verify that this is the current version before use.

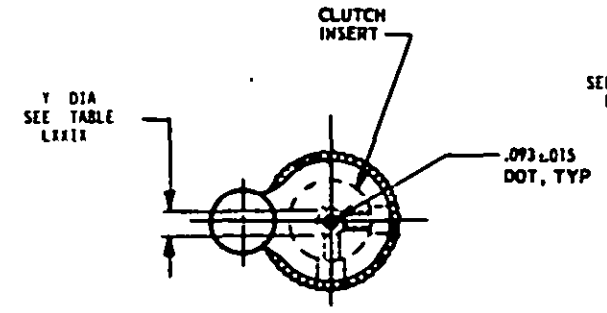

TOP VIEW SHOWING ROUND SHAFT HOLE

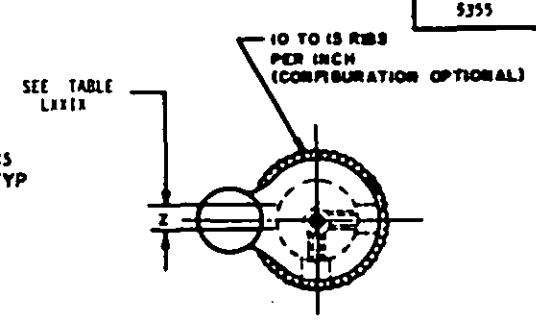

TOP VIEW SHOWING "D" FLAT SHAFT HOLE

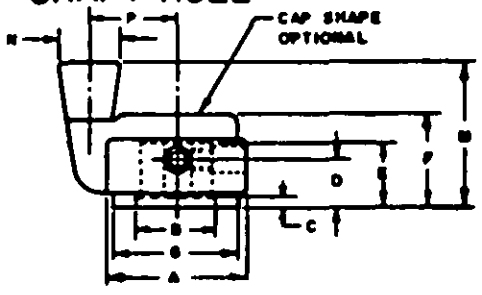

TACTILE FORMS

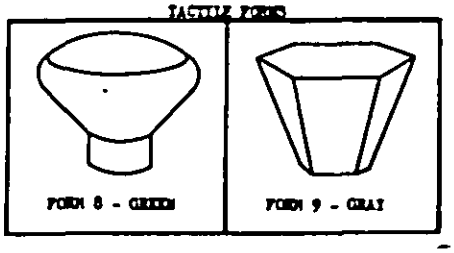


TABLE XLIX - SPINNER SLIP CLUTCH TACTILE KNOBS

MS DASH NUMBER	SERIES	A +0.030 -0.010	NUT CLEARANCE B MIN	NUT CLEARANCE C MIN	D MAX	SHAFT HOLE DEPTH E MIN	F ±0.030	G MAX	M ±0.050	N REF	P ±0.015	SET SCREWS (2 REQ'D) 1 4" SHAFT HOLE	CLUTCH SLIP TORQUE INCH - OUNCES
SEE TABLE L	3	1.250	0.750	0.250	.440	.600	1.040	1.185	1.650	0.860	0.800	.164-32UNC-3A	28-56
	4	1.750	0.750	0.320	.500	.740	1.070	1.690	1.940	1.187	1.094	.164-32UNC-3A	42-84
	5	2.250	0.750	0.320	.500	.740	1.095	2.185	1.970	1.187	1.344	.164-32UNC-3A	64-124

TABLE L - MS DASH NUMBER

MS 91528 - 3 SF 2 B 9

SERIES	STYLE	SHAFT HOLE DIAMETER	COLOR	TACTILE FORM
3	SF - SPINNER SLIP-CLUTCH WITH WHITE DOT	2 - 1/4" ROUND	B - BLACK	8 - FORM 8
4	SG - SPINNER SLIP-CLUTCH WITH FLUORESCENT DOT	4 - 1/4" "D" FLAT	G - GRAY	9 - FORM 9
5	SH - SPINNER SLIP-CLUTCH WITH PHOSPHORESCENT DOT		R - RED	

NOTES:
1. TORQUE REQUIREMENTS OF MIL-K-3926 NOT APPLICABLE.
2. FOR TACTILE FORM DIMENSIONS, SEE SHEET 33.
3. FOR GENERAL NOTES SEE SHEET 47.


APPROVED 2 DEC 1955 REVISED (1) for changes see sheets 15, 16, 29, 37, and 42

User activities:
Navy:- CG, OS*


Review activities:
Army - MI, AT, AV, EA, ME
Navy - MC, AS
DLA - 15

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.


Source: https://assist.dla.mil -- Downloaded: 20260-26T07:22Z
Check the source to verify that this is the current version before use.

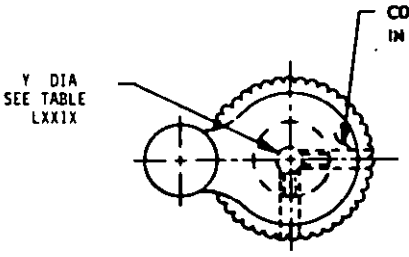

TOP VIEW SHOWING ROUND SHAFT HOLE

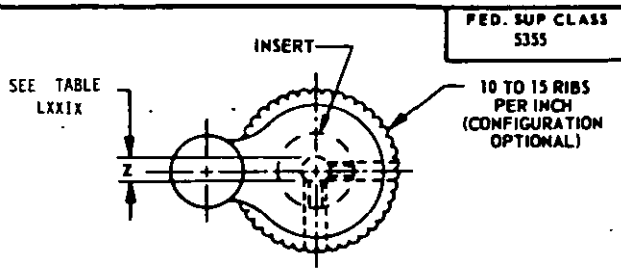

TOP VIEW SHOWING "D" FLAT SHAFT HOLE

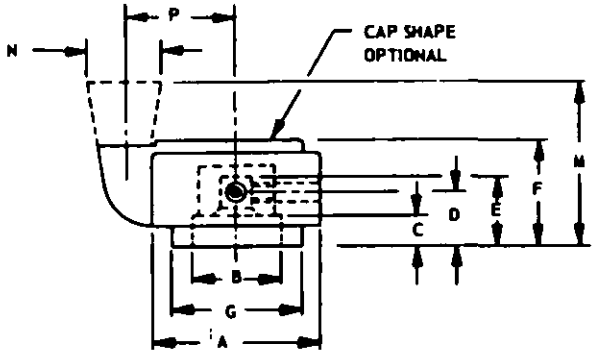


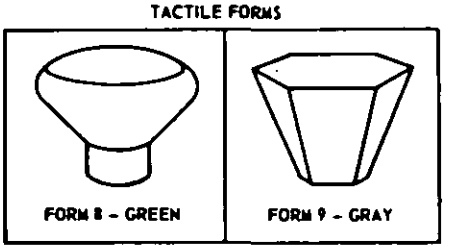


TABLE LI - SPINNER TACTILE KNOBS

MS DASH NUMBER	SERIES	A +0.000 -0.010	NUT CLEARANCE B MIN.	NUT CLEARANCE C MIN.	D MAX.	SHAFT HOLE DEPTH E MIN.	F ±0.030	G MAX.	M ±0.050	N REF	P ±0.015	SET SCREWS (2 REQD) 1/4" SHAFT HOLE
SEE TABLE LII	3	1.250	0.685	0.250	0.427	0.605	0.850	1.185	1.478	0.860	0.800	.164-32 UNC-3A
	4	1.750	0.685	0.320	0.489	0.740	1.090	1.690	1.940	1.187	1.094	.164-32 UNC-3A
	5	2.250	0.685	0.320	0.489	0.740	1.095	2.185	1.970	1.187	1.344	.164-32 UNC-3A

TABLE LII - MS DASH NUMBER

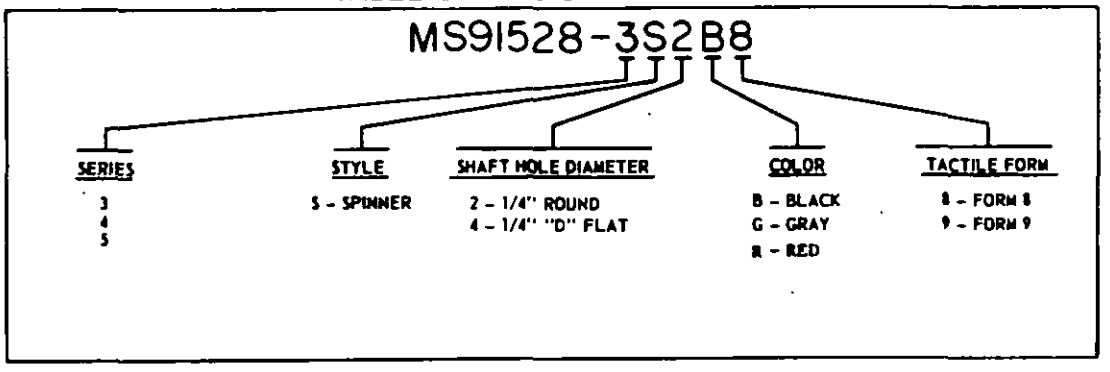

NOTES:
1. FOR TACTILE FORM DIMENSIONS, SEE SHEET 33.
2. FOR GENERAL NOTES SEE SHEET 47.

APPROVED 2 DEC 1955 REVISED (1) For changes see sheets 15, 16, 29, 37, and 42

User activities:
Navy - CG, OS

Review activities:
Army - MI, AT, AV, EA, ME
Navy - MC, AS
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:22Z
Check the source to verify that this is the current version before use.

User activities:
Navy - CG, OS

Review activities:
Army - MI, AT, AV, EA, ME
Navy - MC, AS
DLA - 15

REQUIREMENTS: FOR SHEETS 25 THRU 28		
DASH NO.	TESTS MIL-K-3926	EXTENT OF APPROVAL
.4S2B	TABLE II GROUPS I, II, III, IV AND V	ALL
(J) 3SFZB9	TABLE II GROUPS I, II, III, IV AND V INCLUDES TESTS FOR SLIPPING TORQUE.	ALL

IF PART NUMBER SPECIFIED IS NOT MANUFACTURED, REQUEST ALTERNATE NUMBER FROM GOVERNMENT.


APPROVED 2 DEC 1955 REVISED (J) For changes see sheets 15, 16, 29, 37, and 42

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for retrofitting are shall be made from this document, when applicable.


P.A. EC Other Cust ER 11	TITLE KNOBS-CONTROL, PLASTIC (ROUND, CONCENTRIC, POINTER, SPINNER, SPINNER SLIP-CLUTCH, BAR, TACTILE, KNOB LOCK POINTER, SLIP CLUTCH, AND KNOB LOCK)	MILITARY STANDARD MS 91528
PROCUREMENT SPECIFICATION MIL-K-3926	SUPERSEDES	SHEET 29 OF 42

DD FORM 672-1 (Coordinated)


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:22Z
Check the source to verify that this is the current version before use.

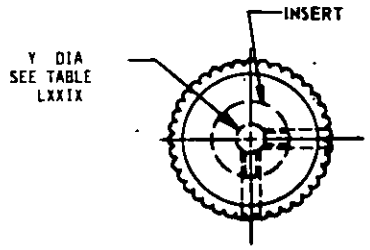

TOP VIEW SHOWING ROUND SHAFT HOLE

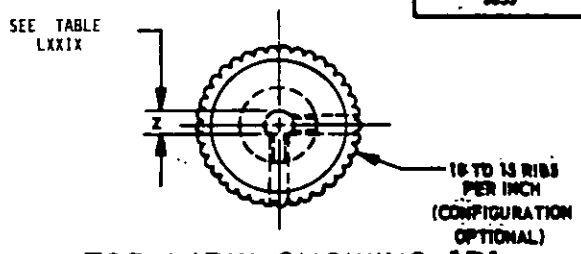

TOP VIEW SHOWING "D" FLAT SHAFT HOLE

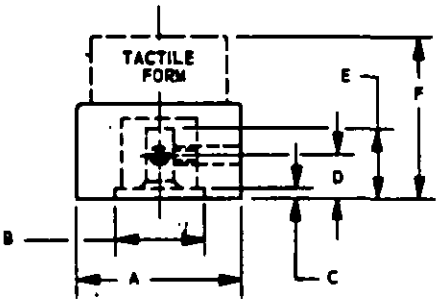

TACTILE FORMS

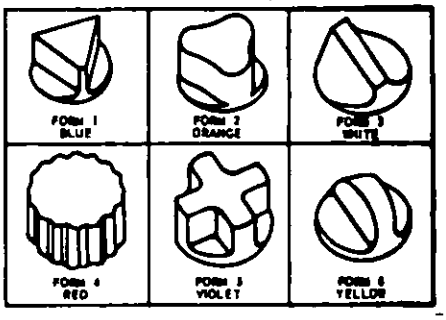


TABLE LIII ROUND TACTILE KNOBS

MS DASH NUMBER	SERIES	A +0.030 -0.010	NUT CLEARANCE B MIN	NUT CLEARANCE C MIN	D MAX	SHAFT HOLE DEPTH E MIN	F ± 0.050	SET SCREWS (2 REQ'D) 1/8" SHAFT HOLE	SET SCREWS (2 REQ'D) 1/4" SHAFT HOLE
SEE TABLE LIV	1	0.700	0.485	0.026	0.187	0.405	0.906	.112-40 UNC-3A	.112-40 UNC-3A
	2	0900	0.640	0.114	0.260	0.520	1.156	.112-40 UNC-3A	.164-32 UNC-3A
	3	1.250	0.750	0.114	0.260	0.455	1.220	———	.164-32 UNC-3A

TABLE LIV MS DASH NUMBER

MS91528-2N2B5

SERIES	STYLE	SHAFT HOLE DIAMETER	COLOR	TACTILE FORM
1	N - ROUND	1 - 1/8" ROUND	B - BLACK	1 - FORM 1
2		2 - 1/4" ROUND	G - GRAY	2 - FORM 2
3		3 - 1/8" "D" FLAT	R - RED	3 - FORM 3
		4 - 1/4" "D" FLAT		4 - FORM 4
				5 - FORM 5
				6 - FORM 6

NOTES:
1. FOR TACTILE FORM DIMENSIONS, SEE SHEET 33.
2. FOR GENERAL NOTES SEE SHEET 47

APPROVED 2 DEC 1955 REVISED ① For changes see sheets 15, 16, 29, 37, and 42

User activities:
Navy - CG, OS

Review activities:
Army - MI, AT, AV, EA, ME
Navy - MC, AS
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A.	DC
Other Cust	ER
	11

TITLE: KNOBS-CONTROL, PLASTIC (ROUND, CONCENTRIC, POINTER, SPINNER, SPINNER SLIP-CLUTCH, BAR, TACTILE, KNOB LOCK POINTER, SLIP-CLUTCH, AND KNOB LOCKS)

MILITARY STANDARD


MS 91528

PROCUREMENT SPECIFICATION MIL-K-3926


SUPERSEDES:

COORDINATED


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:22Z
Check the source to verify that this is the current version before use.

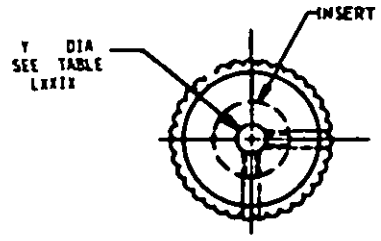

TOP VIEW SHOWING ROUND SHAFT HOLE

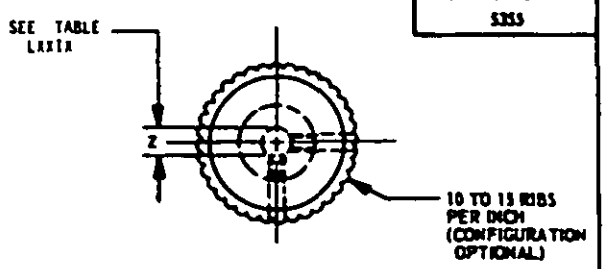

TOP VIEW SHOWING "D" FLAT SHAFT HOLE

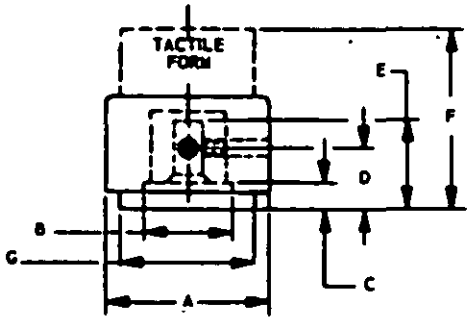

TACTILE FORMS

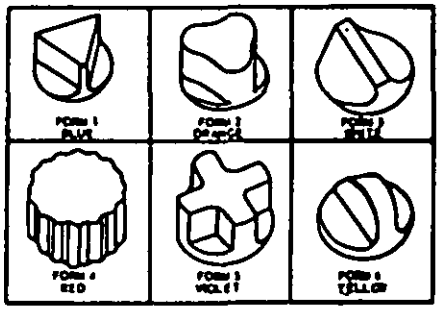


TABLE LV - ROUND RING SKIRT TACTILE KNOBS

MS DASH NUMBER	SERIES	A +0.050 -0.010	NUT CLEARANCE B MIN	NUT CLEARANCE C MIN	D MAX	SHAFT HOLE DEPTH E MIN	F ± 0.050	G MAX	SET SCREWS (2 REQD) 1/8" SHAFT HOLE	SET SCREWS (2 REQD) 1/4" SHAFT HOLE
SEE	1	0.700	0.485	0.188	0.369	0.568	1.075	0.680	.112-40 UNC-3A	.112-40 UNC-3A
	2	0900	0.640	0.320	0.484	0.730	1.375	0.845	.112-40 UNC-3A	.164-32 UNC-3A
LVI	3	1.250	0.750	0.250	0.427	0.605	1.375	1.185	———	.164-32 UNC-3A

TABLE LVI - MS DASH NUMBER

MS91528-2D2B5

SERIES	STYLE	SHAFT HOLE DIAMETER	COLOR	TACTILE FORM
1	D - SKIRTED ROUND, PLAIN	1 - 1/8" ROUND	B - BLACK	1 - FORM 1
2		2 - 1/4" ROUND	G - GRAY	2 - FORM 2
3		3 - 1/8" "D" FLAT	R - RED	3 - FORM 3
		4 - 1/4" "D" FLAT		4 - FORM 4
				5 - FORM 5
				6 - FORM 6

NOTES:
1. FOR TACTILE CAP DIMENSIONS, SEE SHEET 33.
2. FOR GENERAL NOTES SEE SHEET 47.

APPROVED 2 DEC 1955 REVISED ① For changes see sheets 15, 16, 29, 37, and 42

User activities:
Navy - CG, OS


Review activities:
Army - MI, AT, AV, EA, ME
Navy - MC, AS
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A.	TITLE	MILITARY STANDARD
Other Cust ER 11	KNOBS-CONTROL, PLASTIC (ROUND, CONCENTRIC, POINTER, SPINNER, SPINNER SLIP-CLUTCH, BAR, TACTILE, KNOB LOCK POINTER, SLIP-CLUTCH, AND KNOB LOCKS)	MS 91528
PROCUREMENT SPECIFICATION MIL-K-3926	SUPERSEDES	SHEET 31 OF 47


COORDINATED

Source: https://assist.dla.mil -- Downloaded: 20261O-26T07:22Z
Check the source to verify that this is the current version before use.

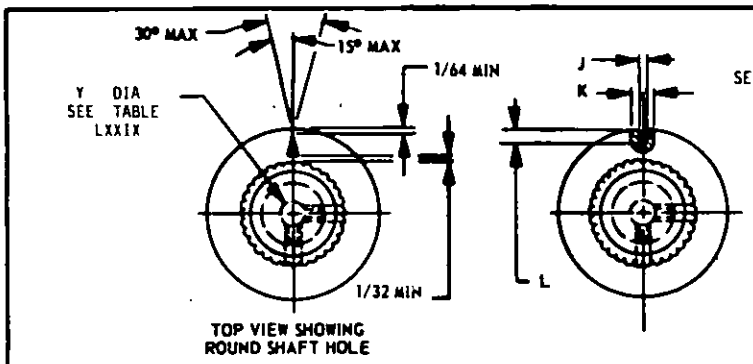

TOP VIEW SHOWING ROUND SHAFT HOLE

TOP VIEW SHOWING "D" FLAT SHAFT HOLE

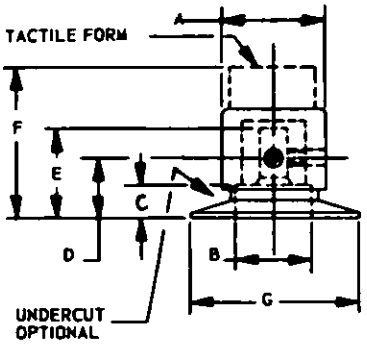

KNOB SERIES	DIMENSIONS		
	J ± 0.010	K ± 0.010	L ± 0.010
1	0.063	0.188	0.125
2	0.063	0.188	0.218
3	0.063	0.188	0.218

TACTILE FORMS

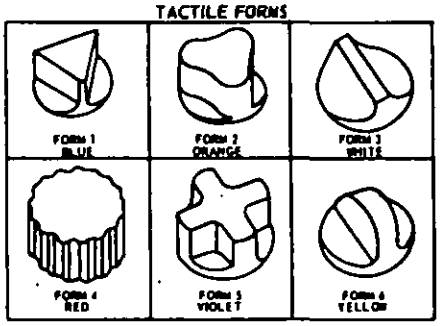


TABLE LVII - ROUND DIAL SKIRT TACTILE KNOBS

MS DASH NUMBER	SERIES	A +0.030 -0.010	NUT CLEARANCE B MIN	NUT CLEARANCE C MIN	D MAX	SHAFT HOLE DEPTH E MIN	F ± 0.050	G MAX	SET SCREWS (2 REQD) 1/8" SHAFT HOLE	SET SCREWS (2 REQD) 1/4" SHAFT HOLE
SEE TABLE LVIII	1	0.700	0.485	0.188	0.369	0.568	1.075	1.150	.112-40 UNC-3A	.112-40 UNC-3A
	2	0900	0.640	0.320	0.484	0.730	1.375	1.525	.112-40 UNC-3A	.164-32 UNC-3A
	3	1.250	0.750	0.250	0.427	0.605	1.375	1.837	———	.164-32 UNC-3A

TABLE LVIII - MS DASH NUMBER

MS91528-2F2B5


SERIES	STYLE		SHAFT HOLE DIAMETER	COLOR	TACTILE FORM
1 2 3	F - ROUND DIAL SKIRT WITH WHITE ARROW G - ROUND DIAL SKIRT, NO ARROW H - ROUND DIAL SKIRT WITH SLOT	O - ROUND DIAL SKIRT WITH BACKLIGHTED WHITE ARROW Q - ROUND DIAL SKIRT WITH FLUORESCENT ARROW QQ - ROUND DIAL SKIRT WITH PHOSPHORESCENT ARROW	1 - 1/8" ROUND 2 - 1/4" ROUND 3 - 1/8" "D" FLAT 4 - 1/4" "D" FLAT	B - BLACK G - GRAY R - RED	1 - FORM 1 2 - FORM 2 3 - FORM 3 4 - FORM 4 5 - FORM 5 6 - FORM 6


NOTES:
1. FOR TACTILE FORM DIMENSIONS, SEE SHEET 33.
2. STYLE O ARROW-BACKLIGHTED SHALL BE IN ACCORDANCE WITH MIL-P-7788.
   STYLE Q AND QQ KNOBS-THERMAL SHOCK SHALL BE IN ACCORDANCE WITH TEST CONDITION A, METHOD 107 OF MIL-STD-202.
3. FOR GENERAL NOTES SEE SHEET 47.

APPROVED 2 DEC 1955 REVISED ① For changes see sheets 15, 16, 29, 37, and 42

User activities: Navy - CG, OS
Review activities: Army - MI, AT, AV, EA, ME Navy - MC, AS DLA - IS
This military standard is approved for use by all Departments and Agencies of the Department of Defense Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:22Z
Check the source to verify that this is the current version before use.

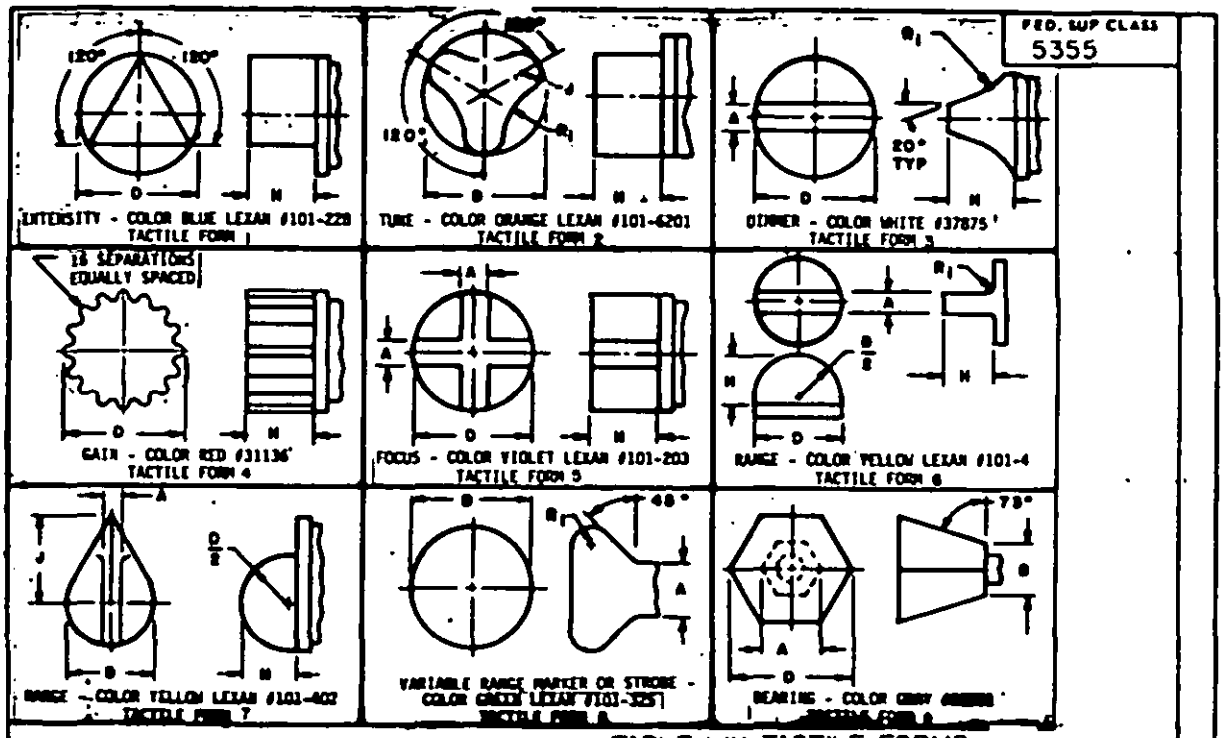



DOT TYPICAL TO TACTILE FORM 1A THRU 6A ONLY (SEE NOTE 3)

FIGURE 1

NOTES:
1. COLORS SHALL BE IN ACCORDANCE WITH FED-STD-595 EXCEPT AS NOTED. THE LEXAN DESIGNATION INDICATES A COLOR IN ACCORDANCE WITH COLOR CHIPS. COLOR CHIPS MAY BE OBTAINED FROM THE NAVAL ELECTRONIC SYSTEMS COMMAND, WASHINGTON, D.C. 20360.
2. TOLERANCES ARE ±2° ON ANGLES.
3. TACTILE FORM NO. AND KNOB STYLE SHOWN IN PARENTHESES INDICATE SLIP-CLUTCH KNOBS.
4. FOR GENERAL NOTES SEE PAGE 47.

TABLE LIX-TACTILE FORMS

TACTILE FORM NO.	USED ON KNOB STYLE	APPLICABLE TO KNOB SIZE	DIMENSIONS A ±0.010	B ±0.010	D ±0.020	H ±0.025	J ±0.025	R1 ±0.025
1 (1A)	D,F,N,G,H,0,0,00 (CV,CX,CY,CZ,DA,DB,DC,DE,DF,DG,DH,DI)	1			0.630	0.345		
		2			0.812	0.438		
		3			1.156	0.625		
2 (2A)		1			0.630	0.345	0.158	0.329
		2			0.812	0.438	0.203	0.422
		3			1.156	0.625	0.281	0.609
3 (3A)		1	0.136		0.630	0.345		0.390
		2	0.175		0.812	0.438		0.500
		3	0.250		1.156	0.625		0.719
4 (4A)		1			0.630	0.390		
		2			0.812	0.500		
		3			1.156	0.690		
5 (5A)		1	0.166		0.630	0.345		
		2	0.213		0.812	0.438		
		3	0.302		1.156	0.625		
6 (6A)		1	0.162		0.630	0.345		0.070
		2	0.188		0.812	0.438		0.125
7	P, K	1	0.162		0.630	0.345	0.630	
		2	0.188		0.812	0.438	0.812	
8	S,SC,SD,SE, SF,SG,SH	3	0.400		0.860			0.125
		4	0.560		1.187			0.188
		5	0.560		1.187			0.188
9	S,SC,SD,SE, SF,SG,SH	3	0.400	0.350	0.860			
		4	0.560	0.484	1.187			
		5	0.560	0.484	1.187			

APPROVED 2 DEC 1955 REVISED ① For changes see sheets 15, 16, 29, 37, and 47

User activities: Navy - CG, OS

Review activities: Army - MI, AT, AV, EA, ME; Navy - MC, AS; DLA - IS

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. EC	TITLE	MILITARY STANDARD
Other Cust GR 11	KNOBS-CONTROL, PLASTIC (ROUND, CONCENTRIC, POINTER, SPINNER, SPINNER SLIP-CLUTCH, BAR, TACTILE, KNOB LOCK POINTER, SLIP-CLUTCH, AND KNOB LOCKS)	MS91528
PROCUREMENT SPECIFICATION MIL-K-3926	SUPERSEDES	SHEET 33 OF 47

DD FORM 672-1 (Coordinated)

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:22Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5355

User activities:
Navy – CG, OS

Review activities:
Army – MI, AT, AV, EA, ME
Navy – MC, AS
DLA – IS

REQUIREMENTS: FOR SHEETS 30 THRU 33		
DASH NO.	TESTS MIL-K-3926	EXTENT OF APPROVAL
1F2B4	TABLE II GROUPS I, II, III, IV AND V	ALL
3H2B5	TABLE II GROUPS I, II, III, IV AND V	ALL

IF PART NUMBER SPECIFIED IS NOT MANUFACTURED, REQUEST ALTERNATE NUMBER FROM GOVERNMENT.

APPROVED 2 DEC 1955 REVISED ① For changes see sheets 15, 16, 29, 37, and 42

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.


P.A. EC	TITLE	MILITARY STANDARD
Other Cust ER	KNOBS-CONTROL, PLASTIC (ROUND, CONCENTRIC, POINTER, SPINNER, SPINNER SLIP-CLUTCH, BAR, TACTILE, KNOB LOCK POINTER, SLIP-CLUTCH, AND KNOB LOCKS)	MS 91528
PROCUREMENT SPECIFICATION MIL-K-3926	SUPERSEDES.	SHEET 34 OF 47

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:22Z
Check the source to verify that this is the currentversion before use.

FED. SUP CLASS
5355

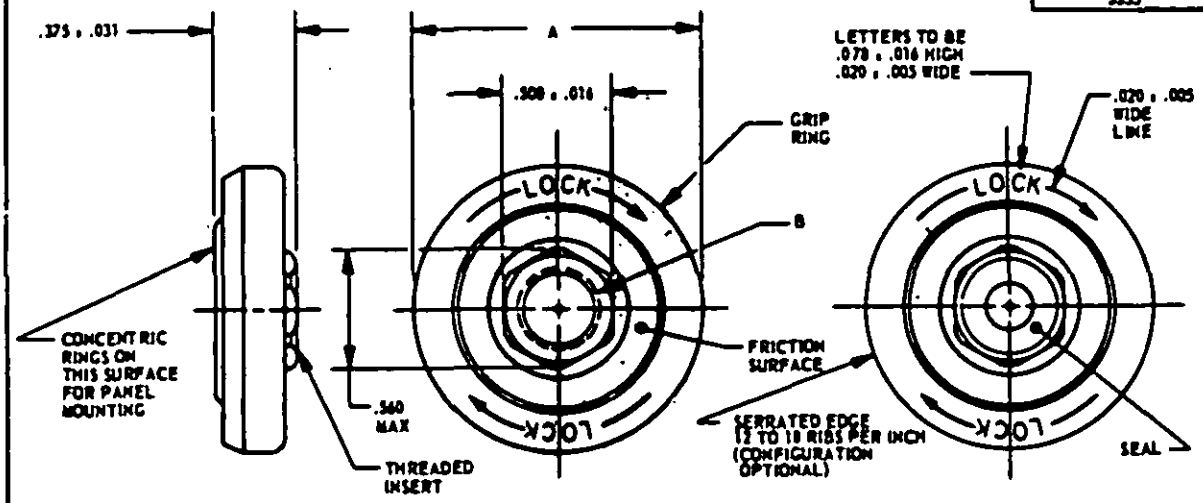

KNOB LOCKS ARE FRICTION LOCKING DEVICES USED IN CONJUNCTION WITH PLAIN KNOBS AND KNOB LOCK POINTER KNOBS AS SHOWN ON SHEETS 1, 2, 4, 5, 7, 30 AND 31.

VIEW SHOWING SPLASH PROOF MODEL

STYLES "DD", "FF", AND "AF" USED ONLY WITH THREAD SIZE NO. 2 FOR 1/4" DIA SHAFTS

TABLE LX - KNOB LOCKS

MS DASH NUMBER	SERIES	A MAX	B THREAD SIZE	
			1/4" SHAFT	1/8" SHAFT
SEE TABLE XXI	1	1.030	.375-32UNEF-2B	.250-32UNEF-2B
	2	1.348	.375-32UNEF-2B	———
	3	1.665	.375-32UNEF-2B	———

TABLE LXI - MS DASH NUMBER

MS 91528 - 2DD2B

SERIES	STYLE		THREAD SIZE	COLOR
1	CC - ROUND KNOB LOCK WITH WHITE MARKING	FF - ROUND KNOB LOCK SPLASH PROOF WITH FLUORESCENT MARKING	1 - .250 - 32	B — BLACK
2	DD - ROUND KNOB LOCK SPLASH PROOF WITH WHITE MARKING	AE - ROUND KNOB LOCK WITH PHOSPHORESCENT MARKING	2 - .375 - 32	G — GRAY
3	EE - ROUND KNOB LOCK WITH FLUORESCENT MARKING	AF - ROUND KNOB LOCK SPLASH PROOF WITH PHOSPHORESCENT MARKING		R — RED

(H)

NOTES:
1. INSERT TORQUE REQUIREMENTS NOT APPLICABLE.
2. STYLE EE, FF, AE AND AF KNOB LOCKS-THERMAL SHOCK SHALL BE IN ACCORDANCE WITH TEST CONDITION A, METHOD 107 OF MIL-STD-202.
3. FOR GENERAL NOTES SEE SHEET 47.

APPROVED 2 DEC 1955 REVISED (J) For changes see sheets 15, 16, 29, 37, and 42

User activities: Navy - CG, OS

Review activities: Army - MI, AT, AV, EA, ME; Navy - MC, AS; DLA - 15

This military standard is approved for use by all Departments and Agencies of the Department of Defense Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A. MC	TITLE	MILITARY STANDARD
Other Cust ER 13	KNOBS-CONTROL, PLASTIC (ROUND, CONCENTRIC, POINTER, SPINNER, SPINNER SLIP-CLUTCH, BAR, TACTILE, KNOB LOCK POINTER, SLIP-CLUTCH, AND KNOB LOCKS)	MS91528
PROCUREMENT SPECIFICATION MIL-K-3926	SUPERSEDES	SHEET 35 OF 47

COORDINATED

Source: https://assist.dla.mil -- Downloaded: 20261O-26T07:22Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5355

Other activities:
Navy – CG, OS

Review activities:
Army – MI, AT, AV, EA, ME
Navy – MC, AS
DLA – 15

REQUIREMENTS: FOR SHEET 35		
DASH NO.	TESTS MIL-K-3926	EXTENT OF APPROVAL
ICC2B	TABLE II GROUPS I, II, III, IV AND V	ALL
2AE2B MATED WITH 2N2B OR 2AA2B	TABLE II GROUPS I, II, III, IV AND V THERMAL SHOCK TEST SHALL BE IN ACCORDANCE WITH MS SPECIFICATION NOTE 2 (PAGE 35) WHILE MATED WITH KNOB.	ALL

IF PART NUMBER SPECIFIED IS NOT MANUFACTURED, REQUEST ALTERNATE NUMBER FROM GOVERNMENT.

APPROVED 2 DEC 1955 REVISED ③ For changes see sheets 15, 16, 29, 37, and 42

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.


P.A. EC Other Cust ER 11	TITLE KNOBS-CONTROL, PLASTIC (ROUND, CONCENTRIC, POINTER, SPINNER, SPINNER SLIP-CLUTCH, BAR, TACTILE, KNOB LOCK POINTER, SLIP-CLUTCH, AND KNOB LOCKS)	MILITARY STANDARD MS 91528
PROCUREMENT SPECIFICATION MIL-K-3926	SUPERSEDES:	SHEET 36 OF 47

DD FORM 1 MAR 72 672-1 (Coordinated)


PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:22Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5355

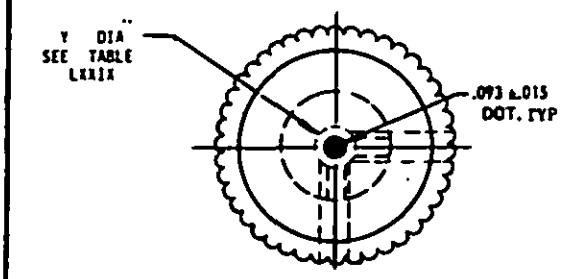

TOP VIEW SHOWING ROUND SHAFT HOLE

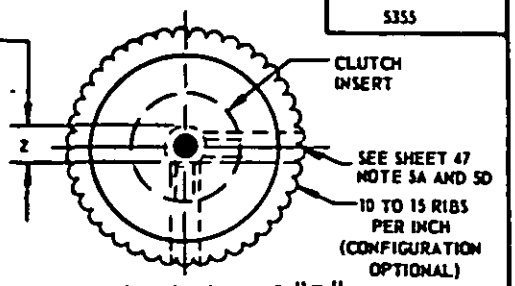

TOP VIEW SHOWING "D" FLAT SHAFT HOLE

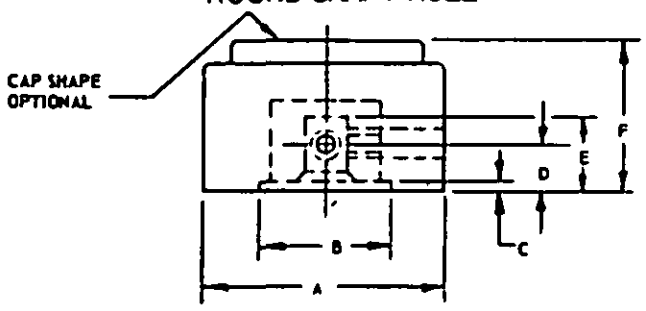


TABLE LXII - ROUND SLIP-CLUTCH KNOBS

MS DASH NUMBER	SERIES	A +0.030 -0.010	NUT CLEARANCE B MIN	NUT CLEARANCE C MIN	D* MAX	SHAFT HOLE DEPTH E MIN	F ±0.030	*SETSCREWS (UNC-3A) (2 REQ'D) 5/64 SHAFT HOLE	*SETSCREWS (UNC-3A) (2 REQ'D) 1/8 AND 5/32 SHAFT HOLE	*SETSCREWS (UNC-3A) (2 REQ'D) 1/4 SHAFT HOLE	CLUTCH SLIP TORQUE INCH-OUNCES
SEE TABLE LXIII	0	0.510	0.359	0.026	0.158	0.405	0.510	.086-56	.112-40	—	8 to 16
	1	0.715	0.485	0.026	0.187	0.405	0.610	—	.112-40	.112-40	12 to 24
	2	0.915	0.640	0.114	0.270	0.520	0.790	—	.112-40	.112-40	20 to 36
	3	1.250	0.798	0.114	0.280	0.455	0.860	—	—	.164-32	28 to 56
	4	1.750	0.750	0.114	0.280	0.520	0.860	—	—	.164-32	42 to 84
	5	2.250	0.750	0.114	0.280	0.520	0.875	—	—	.164-32	64 to 124

TABLE LXIII - MS DASH NUMBERS

MS91528 - 2 AG 2 B

SERIES	STYLE	SHAFT HOLE DIAMETER	COLOR
0 1 2 3 4 5	AG - ROUND WITH WHITE DOT AH - ROUND WITH FLUORESCENT DOT AI - ROUND WITH PHOSPHORESCENT DOT (J)	1 - 1/8" ROUND 2 - 1/4" ROUND 3 - 1/8" "D" FLAT 4 - 1/4" "D" FLAT 5 - 5/64" ROUND 6 - 5/32" ROUND 7 - 5/64" "D" FLAT 8 - 5/32" "D" FLAT	B - BLACK G - GRAY R - RED

NOTES:
1. STYLE AH AND AI KNOBS-THERMAL SHOCK SHALL BE IN ACCORDANCE WITH TEST CONDITION A METHOD 107 OF MIL-STD-202.
2. FOR GENERAL NOTES SEE SHEET 47.

NEW SHEET ADDED

APPROVED 2 DEC 1955 REVISED (J) For changes see sheets 15, 16, 29, 37, and 42

User activities: Navy - CG, OS


Review activities: Army - MI, AT, AV, EA, ME, Navy - MC, AS, DLA - 15

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Deviation for all new engineering and design applications and for repetitive use shall be made from this document.


P.A. EC Other Coast ER 11	TITLE: KNOBS—CONTROL, PLASTIC (ROUND, CONCENTRIC, POINTER, SPINNER, SPINNER SLIP-CLUTCH, BAR, TACTILE, KNOB LOCK POINTER, SLIP-CLUTCH, AND KNOB LOCKS)	MILITARY STANDARD MS91528
PROCUREMENT SPECIFICATION MIL-K-3926	SUPERSEDES	SHEET 37 OF 47

DD FORM 1 MAR 72 672-1 (Coordinated) PREVIOUS EDITION OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:22Z
Check the source to verify that this is the current version before use.

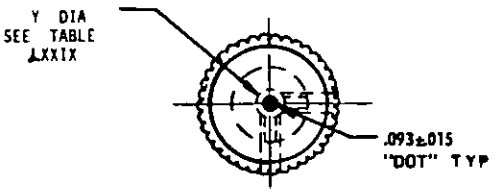

TOP VIEW SHOWING
ROUND SHAFT HOLE

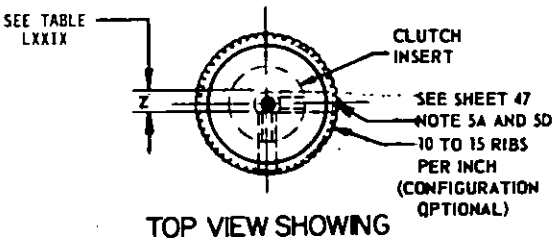

TOP VIEW SHOWING
"D" FLAT SHAFT HOLE

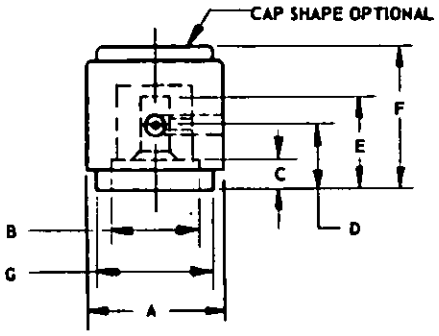


TABLE LXIV ROUND RING SKIRT SLIP-CLUTCH KNOBS

MS DASH NUMBER	SERIES	A +0.030 -0.010	NUT CLEARANCE B MIN	NUT CLEARANCE C MIN	D MAX	SHAFT HOLE DEPTH E MIN	F ±0.030	G MAX	SET SCREWS (UNC-3A) (2 REQ'D) 5/64 SHAFT HOLE	SET SCREWS (UNC-3A) (2 REQ'D) 1/8 AND 5/32 SHAFT HOLE	SET SCREWS (UNC-3A) (2 REQ'D) 1/4 SHAFT HOLE	CLUTCH SLIP TORQUE INCH-OUNCES
SEE TABLE LXV	0	0.510	0.300	0.177	0.325	0.560	0.655	0.468	.086-56	.112-40		8 TO 16
	1	0.715	0.485	0.188	0.369	0.568	0.782	0.695	—	.112-40	.112-40	12 TO 24
	2	0.915	0.640	0.320	0.484	0.730	1.010	0.845	—	.112-40	.112-40	28 TO 36
	3	1.250	0.750	0.250	0.440	0.605	1.040	1.185	—	—	.164-32	28 TO 56
	4	1.750	0.750	0.320	0.500	0.740	1.870	1.690	—	—	.164-32	42 TO 84
	5	2.250	0.750	0.320	0.500	0.740	1.095	2.185	—	—	.164-32	64 TO 124

TABLE LXV MS DASH NUMBERS

MS91528-2 CH 2 B

SERIES	STYLE	SHAFT HOLE DIAMETER	COLOR
0	CH - SKIRTED ROUND WITH WHITE DOT	1 - 1/8" ROUND	B - BLACK
1	CI - SKIRTED ROUND WITH FLUORESCENT DOT	2 - 1/4" ROUND	G - GRAY
2	CJ - SKIRTED ROUND WITH PHOSPHORESCENT DOT	3 - 1/8" "D" FLAT	R - RED
3		4 - 1/4" "D" FLAT	
4		5 - 5/64" ROUND	
5		6 - 5/32" ROUND	
		7 - 5/64" "D" FLAT	
		8 - 5/32" "D" FLAT	

NOTES:
1. STYLE CI AND CJ KNOBS-THERMAL SHOCK SHALL BE IN ACCORDANCE WITH TEST CONDITION A, METHOD 107 PER MIL-STD-202.
2. FOR GENERAL NOTES SEE SHEET 47.

NEW SHEET ADDED

User activities:
Navy - CG, OS

Review activities:
Army - MI, AT, AV, EA, ME.
Navy - MC, AS
DLA - IS

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.


APPROVED 2 DEC 1955 REVISED (1) For changes see sheets 15, 16, 29, 37, and 42


P.A. EC Other Cust ER 11	TITLE KNOBS-CONTROL, PLASTIC (ROUND, CONCENTRIC, POINTER, SPINNER, SPINNER SLIP-CLUTCH, BAR, TACTILE, KNOB LOCK POINTER, SLIP-CLUTCH, AND KNOB LOCKS)	MILITARY STANDARD MS91528	
PROCUREMENT SPECIFICATION MIL-K-3926	SUPERSEDES:	SHEET 38 OF 47	

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:22Z
Check the source to verify that this is the current version before use.

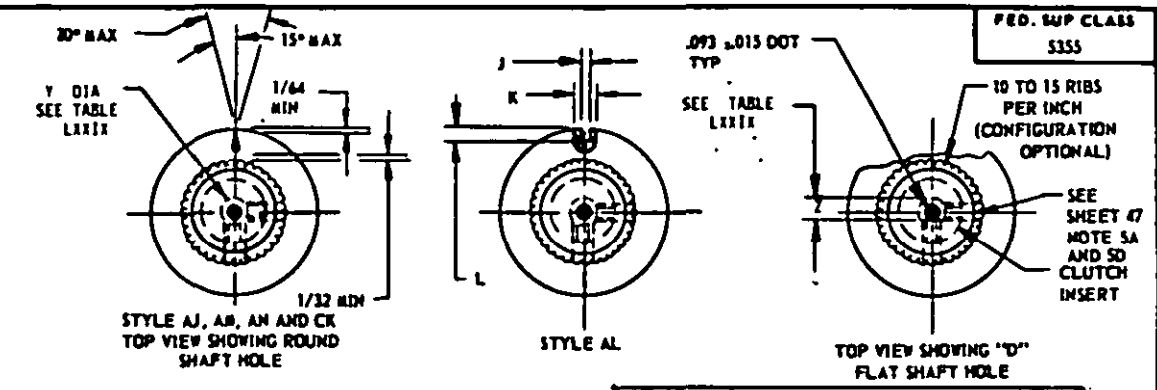

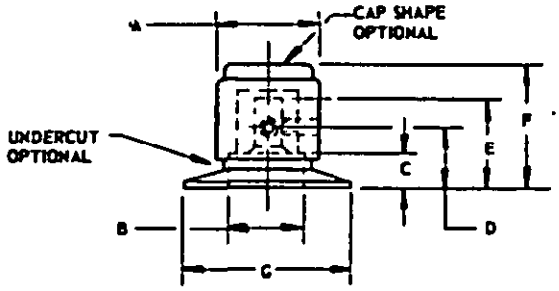

KNOB SERIES	DIMENSIONS		
	J ±0.010	K ±0.010	L ±0.010
0	0.063	0.188	0.125
1	0.063	0.188	0.125
2	0.063	0.188	0.218
3	0.063	0.188	0.218
4	—	—	—
5	—	—	—

TABLE LXVI - ROUND DIAL SKIRT SLIP - CLUTCH KNOBS

MS DASH NUMBER	SERIES	A +0.030 -0.010	NUT CLEARANCE B MIN	NUT CLEARANCE C MIN	D MAX	SHAFT HOLE DEPTH E MIN	F ±0.040	G MAX	SET SCREWS (UNC-3A) (2 REQ'D) 5/64 SHAFT HOLE	SET SCREWS (UNC-3A) (2 REQ'D) 1/8 AND 5/32 SHAFT HOLE	SET SCREWS (UNC-3A) (2 REQ'D) 1/4 SHAFT HOLE	CLUTCH SLIP TORQUE INCH-OUNCES
SEE TABLE LXVII	0	0.510	0.300	0.050	0.325	0.560	0.665	0.900	.086-56	.112-40	—	8 TO 16
	1	0.715	0.435	0.050	0.369	0.568	0.800	1.150	—	.112-40	.112-40	12 TO 24
	2	0.915	0.590	0.320	0.484	0.730	1.010	1.525	—	.112-40	.112-40	20 TO 36
	3	1.250	0.750	0.250	0.440	0.605	1.040	1.837	—	—	.164-32	28 TO 56
	4	1.750	0.750	0.320	0.500	0.740	1.070	2.468	—	—	.164-32	42 TO 84
	5	2.250	0.750	0.320	0.500	0.740	1.095	3.020	—	—	.164-32	64 TO 124

TABLE LXVII - MS DASH NUMBER

MS 91528 - 2 AJ 2 B

SERIES	STYLE	SHAFT HOLE DIAMETER	COLOR
0	AJ - SKIRT WHITE ARROW, KNOB WHITE DOT	1 - 1/8" ROUND	B - BLACK
1	AK - SKIRT NO ARROW, KNOB WHITE DOT	2 - 1/4" ROUND	G - GRAY
2	AL - SKIRT WITH SLOT, KNOB WHITE DOT	3 - 1/8" "D" FLAT	R - RED
3	AN - SKIRT BACKLIGHTED, WHITE ARROW, KNOB OPAQUE WHITE DOT	4 - 1/4" "D" FLAT	
4		5 - 5/64" ROUND	
5		6 - 5/32" ROUND	
		7 - 5/64" "D" FLAT	
		8 - 5/32" "D" FLAT	

AN - SKIRT FLUORESCENT ARROW, KNOB FLUORESCENT DOT
CK - SKIRT PHOSPHORESCENT ARROW, KNOB PHOSPHORESCENT DOT

NOTES:
1. STYLE AN ARROW BACKLIGHTED SHALL BE IN ACCORDANCE WITH MIL-P-7788. STYLE AN AND CK KNOBS-THERMAL SHOCK SHALL BE IN ACCORDANCE WITH TEST CONDITION A, METHOD 107 OF MIL-STD-202.
2. FOR GENERAL NOTES SEE SHEET 47.

NEW SHEET ADDED

APPROVED 2 DEC 1955 REVISED ③ for changes see sheets 15, 16, 29, 37, and 42

User activities: Navy - CG, OS

Review activities: Army - MI, AT, AV, EA, ME Navy - MC, AS DLA - IS


This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. EC Other Cust ER 11	TITLE KNOBS-CONTROL, PLASTIC (ROUND, CONCENTRIC, POINTER, SPINNER, SPINNER SLIP-CLUTCH, BAR, TACTILE, KNOB LOCK POINTER, SLIP-CLUTCH, AND KNOB LOCKS)	MILITARY STANDARD MS91528
PROCUREMENT SPECIFICATION MIL-K-3926	SUPERSEDES	SHEET 39 OF 47


DD FORM 672-1 (Coordinated)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:22Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5355

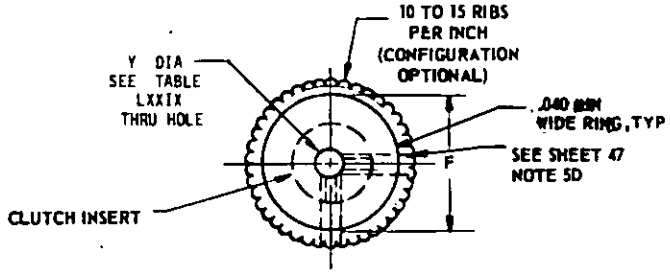

TOP VIEW SHOWING ROUND SHAFT HOLE

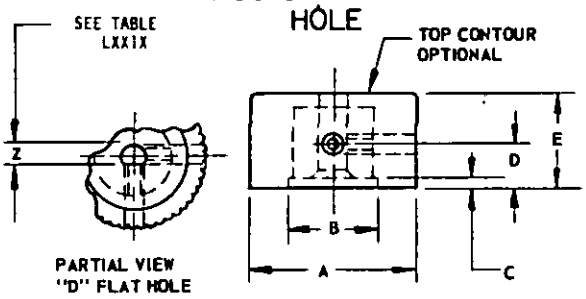

PARTIAL VIEW "D" FLAT HOLE

CONCENTRIC KNOBS CONSIST OF TWO SEPARATE PARTS: AN UPPER KNOB FOR THE INNER CONTROL SHAFT AND A LOWER KNOB FOR THE OUTER CONTROL SHAFT. EACH IS IDENTIFIED BY ITS OWN MS DASH NUMBER AND EACH MUST BE SPECIFIED AND ORDERED SEPARATELY. ONLY LOWER KNOBS FOR OUTER CONTROL SHAFTS ARE DETAILED ON THIS SHEET. UPPER KNOBS FOR INNER CONTROL SHAFTS SHOULD BE SPECIFIED AND SELECTED FROM AMONG THE 1/8 INCH SHAFT HOLE DIAMETER KNOBS DETAILED ON SHEETS 1, 2, 30, 31, 37, 38, 44 AND 45. ORDINARILY, SERIES 0 UPPER KNOBS ARE USED WITH SERIES 1 CONCENTRIC LOWER KNOBS; SIMILARLY, SERIES 1 AND SERIES 2 UPPER KNOBS ARE USED WITH SERIES 2 AND SERIES 3 CONCENTRIC LOWER KNOBS RESPECTIVELY, ETC.

TABLE LXVIII - ROUND CONCENTRIC SLIP-CLUTCH KNOBS

MS DASH NUMBER	SERIES	A +0.030 -0.010	NUT CLEARANCE B MIN	NUT CLEARANCE C MIN	D MAX	E ±0.025	F ±1/64 RING OD	SET SCREWS (UNC-3A) (2 REQ'D) 5/32 SHAFT HOLE	SET SCREWS (UNC-3A) (2 REQ'D) 1/4 SHAFT HOLE	CLUTCH SLIP TORQUE INCH-OUNCES
SEE TABLE LXIX	1	0.715	0.485	0.026	0.187	0.510	5/8	.112-40	.112-40	12 TO 24
	2	0.915	0.640	0.114	0.270	0.655	25/32	.112-40	.112-40	20 TO 36
	3	1.250	0.750	0.114	0.280	0.715	1-1/8	—	.164-32	28 TO 56
	4	1.750	0.750	0.114	0.280	0.660	1-5/8	—	.164-32	42 TO 84
	5	2.250	0.750	0.114	0.280	0.660	2-1/8	—	.164-32	64 TO 124

TABLE LXIX - MS DASH NUMBER

MS91528 - 2 CL 2 B C

SERIES	STYLE	SHAFT HOLE DIAMETER	COLOR	KNOB FORM
1	CL - ROUND WITH WHITE RING	2 - 1/4" ROUND	B - BLACK	C - CONCENTRIC
2		4 - 1/4" "D" FLAT	G - GRAY	
3	CM - ROUND WITH FLUORESCENT RING	6 - 5/32" ROUND	R - RED	
4		8 - 5/32" "D" FLAT		
5	CN - ROUND WITH PHOSPHORESCENT RING			

NOTES:
1. STYLE CM AND CN KNOBS-THERMAL SHOCK SHALL BE IN ACCORDANCE WITH TEST CONDITION A, METHOD 107 PER MIL-STD-202.
2. FOR GENERAL NOTES SEE SHEET 47.

NEW SHEET ADDED

APPROVED 2 DEC 1955 REVISED ⓙ For changes see sheets 15, 16, 29, 37, and 42

User activities: Navy - CG, OS


Review activities: Army - MI, AT, AV, EA, ME; Navy - MC, AS; DLA - IS

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetition use shall be made from this document.


P.A. EC Other Cust E R 11	TITLE KNOBS-CONTROL, PLASTIC (ROUND, CONCENTRIC, POINTER, SPINNER, SPINNER SLIP-CLUTCH, BAR, TACTILE, KNOB LOCK POINTER, SLIP-CLUTCH, AND KNOB LOCKS)	MILITARY STANDARD MS91528	
PROCUREMENT SPECIFICATION MIL-K-3926	SUPERSEDES.	SHEET 40 OF 47	

DD FORM 1 MAR 72 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:22Z
Check the source to verify that this is the current version before use.

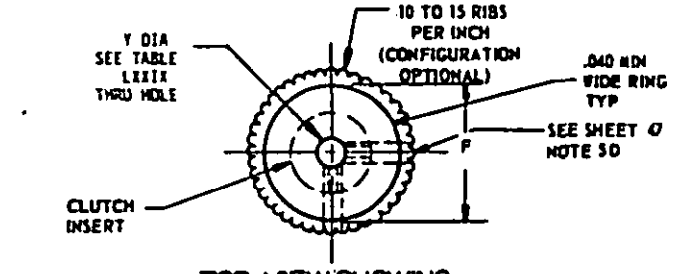

TOP VIEW SHOWING
ROUND SHAFT HOLE

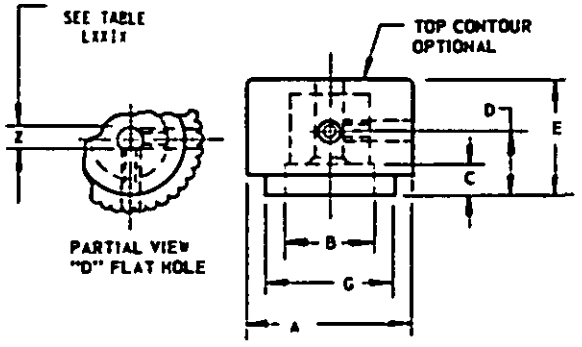

CONCENTRIC KNOBS CONSIST OF TWO SEPARATE PARTS: AN UPPER KNOB FOR THE INNER CONTROL SHAFT AND A LOWER KNOB FOR THE OUTER CONTROL SHAFT. EACH IS IDENTIFIED BY ITS OWN MS DASH NUMBER AND EACH MUST BE SPECIFIED AND ORDERED SEPARATELY. ONLY LOWER KNOBS FOR OUTER CONTROL SHAFTS ARE DETAILED ON THIS SHEET. UPPER KNOBS FOR INNER CONTROL SHAFTS SHOULD BE SPECIFIED AND SELECTED FROM AMONG THE 1/8 INCH SHAFT HOLE DIAMETER KNOBS DETAILED ON SHEETS 1, 2, 30, 31, 37, 38, 44 AND 45. ORDINARILY, SERIES 0 UPPER KNOBS ARE USED WITH SERIES 1 CONCENTRIC LOWER KNOBS; SIMILARLY, SERIES 1 AND SERIES 2 UPPER KNOBS ARE USED WITH SERIES 2 AND SERIES 3 CONCENTRIC LOWER KNOBS RESPECTIVELY, ETC.

TABLE LXX - ROUND CONCENTRIC RING SKIRT SLIP-CLUTCH KNOB

MS DASH NUMBER	SERIES	A -0.030 -0.010	NUT CLEARANCE B MIN	NUT CLEARANCE C MIN	D MAX	E ±0.025	F ±1/64 RING OD	G MAX	SET SCREWS (2 REQ'D) (UNC-3A) 5/32 SHAFT HOLE	SET SCREWS (2 REQ'D) (UNC-3A) 1/4 SHAFT HOLE	CLUTCH SLIP TORQUE INCH-OUNCES
SEE TABLE LXXI	1	0.715	0.485	0.188	0.369	0.675	5/8	0.695	.112-40	.112-40	12 TO 24
	2	0.915	0.640	0.320	0.484	0.885	25 32	0.845	.112-40	.112-40	20 TO 36
	3	1.250	0.750	0.250	0.440	0.885	1-1/8	1.185	—	.164-32	28 TO 56
	4	1.750	0.750	0.320	0.500	0.885	1-5/8	1.690	—	.164-32	42 TO 84
	5	2.250	0.750	0.320	0.500	0.885	2-1/8	2.185	—	.164-32	64 TO 124

TABLE LXXI - MS DASH NUMBERS

MS91528 - 2 CP 2 B C

SERIES	STYLE	SHAFT HOLE DIAMETER	COLOR	KNOB FORM
1 2 3 4 5	CO - SKIRTED ROUND WITH WHITE RING CP - SKIRTED ROUND WITH FLUORESCENT RING CR - SKIRTED ROUND WITH PHOSPHORESCENT RING	2 - 1/4" ROUND 4 - 1/4" "D" FLAT 6 - 5/32" ROUND 8 - 5/32" "D" FLAT	B - BLACK G - GRAY R - RED	C - CONCENTRIC

NOTES:
1. STYLE CP AND CR KNOBS-THERMAL SHOCK SHALL BE IN ACCORDANCE WITH TEST CONDITION A, METHOD 107, PER MIL-STD-202.
2. FOR GENERAL NOTES SEE SHEET 47.

NEW SHEET ADDED

User activities:
Navy - CG, OS

Review activities:
Army - MI, AT, AV, EA, ME
Navy - MC, AS
DLA - IS

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 7 DEC 1955 REVISED (1) For changes see sheets 15, 16, 19, 37, and 42

P.A. EC Other Cust ER 11	TITLE KNOBS-CONTROL, PLASTIC (ROUND, CONCENTRIC, POINTER, SPINNER, SPINNER SLIP-CLUTCH, BAR, TACTILE, KNOB LOCK POINTER, SLIP-CLUTCH, AND KNOB LOCKS)	MILITARY STANDARD MS91528
PROCUREMENT SPECIFICATION MIL-K-3926	SUPERSEDES	SHEET 41 OF 47

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:22Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5355

REQUIREMENTS: FOR SHEETS 37 THRU 41		
DASH NO.	TESTS MIL-K-3926	EXTENT OF APPROVAL
1AJ2G 5CH2B 2AH2G	TABLE II GROUPS I, II, III, IV, V, VI AND VII	ALL

(J)

IF PART NUMBER SPECIFIED IS NOT MANUFACTURED, REQUEST ALTERNATE NUMBER FROM GOVERNMENT.

User activities:
Navy - CG, OS

Review activities:
Army - MI, AT, AV, EA, ME
Navy - MC, AS
DLA - 15

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 2 DEC 1955 REVISED (J) For changes see sheets 15, 16, 29, 37, and 42


NEW SHEET ADDED

P.A. EC Other Cust ER 11	TITLE KNOBS--CONTROL, PLASTIC (ROUND, CONCENTRIC, POINTER, SPINNER, SPINNER SLIP-CLUTCH, BAR, TACTILE, KNOB LOCK POINTER, SLIP-CLUTCH, AND KNOB LOCKS)	MILITARY STANDARD MS91528
PROCUREMENT SPECIFICATION MIL-K-3926	SUPERSEDES:	SHEET 42 OF 47

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:22Z
Check the source to verify that this is the current version before use.

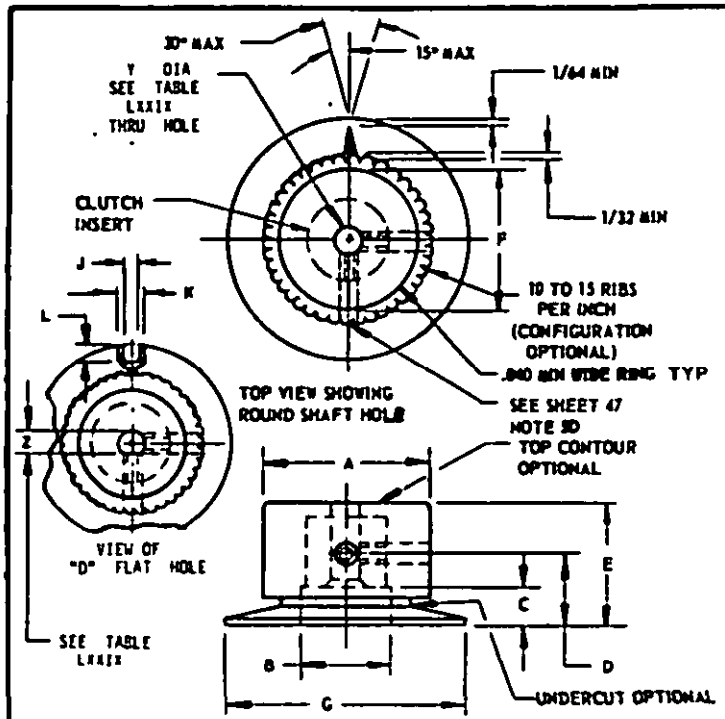

CONCENTRIC KNOBS CONSIST OF TWO SEPARATE PARTS: AN UPPER KNOB FOR THE INNER CONTROL SHAFT AND A LOWER KNOB FOR THE OUTER CONTROL SHAFT. EACH IS IDENTIFIED BY ITS OWN MS DASH NUMBER AND EACH MUST BE SPECIFIED AND ORDERED SEPARATELY. ONLY LOWER KNOBS FOR OUTER CONTROL SHAFTS ARE DETAILED ON THIS SHEET. UPPER KNOBS FOR INNER CONTROL SHAFTS SHOULD BE SPECIFIED AND SELECTED FROM AMONG THE 1/8 INCH SHAFT HOLE DIAMETER KNOBS DETAILED ON SHEETS 1, 2, 30, 31, 37, 38, 44 AND 45. ORDINARILY, SERIES 0 UPPER KNOBS ARE USED WITH SERIES 1 CONCENTRIC LOWER KNOBS; SIMILARLY, SERIES 1 AND SERIES 2 UPPER KNOBS ARE USED WITH SERIES 2 AND SERIES 3 CONCENTRIC LOWER KNOBS RESPECTIVELY, ETC.

KNOB SERIES	DIMENSIONS		
	J ±0.010	K ±0.010	L ±0.010
1	0.063	0.188	0.125
2	0.063	0.188	0.218
3	0.063	0.188	0.218
4	—	—	—
5	—	—	—

TABLE LXXII - ROUND CONCENTRIC DIAL SKIRT SLIP-CLUTCH KNOB

MS DASH NUMBER	SERIES	A -0.030 -0.010	NUT CLEARANCE B MIN	NUT CLEARANCE C MIN	D MAX	E ±0.025	F ±1/64 RING OD	G MAX	SET SCREWS (2 REQ'D) (UNC-3A) 5/32 SHAFT HOLE	SET SCREWS (2 REQ'D) (UNC-3A) 1/4 SHAFT HOLE	CLUTCH SLIP TORQUE INCH-OUNCES
SEE TABLE LXXIII	1	0.715	0.485	0.050	0.369	0.690	5/8	1.150	.112-40	.112-40	12 TO 24
	2	0.915	0.590	0.320	0.484	0.885	25/32	1.525	.112-40	.112-40	20 TO 36
	3	1.250	0.750	0.250	0.440	0.885	1-1/8	1.837	—	.164-32	28 TO 56
	4	1.750	0.750	0.320	0.500	0.885	1-5/8	2.468	—	.164-32	42 TO 84
	5	2.250	0.750	0.320	0.500	0.885	2-1/8	3.020	—	.164-32	64 TO 124

TABLE LXXIII - MS DASH NUMBER

MS91528 - 2 CS 2 B C

SERIES	STYLE	SHAFT HOLE DIAMETER	COLOR	KNOB FORM
1	CS - SKIRT WHITE ARROW KNOB WHITE RING	2 - 1/4" ROUND	B - BLACK	C - CONCENTRIC
2		4 - 1/4" "D" FLAT	G - GRAY	
3	CT - SKIRT FLUORESCENT ARROW KNOB FLUORESCENT RING	6 - 5/32" ROUND	R - RED	
4		8 - 5/32" "D" FLAT		
5	CU - SKIRT BACKLIGHTED WHITE ARROW, KNOB OPAQUE WHITE RING			
	CV - SKIRT PHOSPHORESCENT ARROW, KNOB PHOSPHORESCENT RING			
	DK - SKIRT WITH SLOT, KNOB WHITE RING			
	DL - SKIRT NO ARROW, KNOB WHITE RING			

NOTES:
1. STYLE CT AND CV KNOBS-THERMAL SHOCK SHALL BE IN ACCORDANCE WITH TEST CONDITION A METHOD 107 OF MIL-STD-202. STYLE CU ARROW-BACKLIGHTED SHALL BE IN ACCORDANCE WITH MIL-P-7788.
2. FOR GENERAL NOTES SEE SHEET 47.

NEW SHEET ADDED

APPROVED 2 DEC 1955 REVISED ① For changes see sheets 15, 16, 29, 37, and 42

User activities: Navy - CG, OS


Review activities: Army - MI, AT, AV, EA, MR, Navy - MC, AS, DLA - IS

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.


P.A. EC	TITLE KNOBS-CONTROL, PLASTIC (ROUND, CONCENTRIC, POINTER, SPINNER, SPINNER SLIP-CLUTCH, BAR, TACTILE, KNOB LOCK POINTER, SLIP-CLUTCH, AND KNOB LOCKS)	MILITARY STANDARD
Other Cust ER 11		MS91528
PROCUREMENT SPECIFICATION MIL-K-3926	SUPERSEDES	SHEET 43 OF 47

DD FORM 1426 672-1 (Coordinated)


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:22Z
Check the source to verify that this is the current version before use.

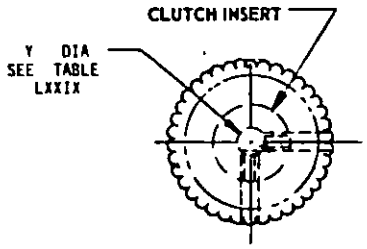

TOP VIEW SHOWING
ROUND SHAFT HOLE

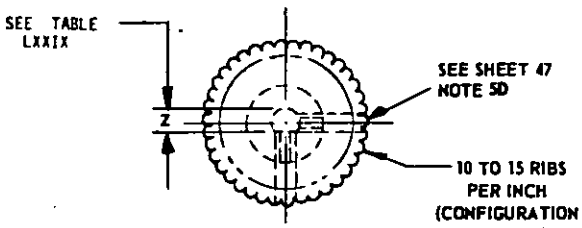

TOP VIEW SHOWING
"D" FLAT SHAFT HOLE

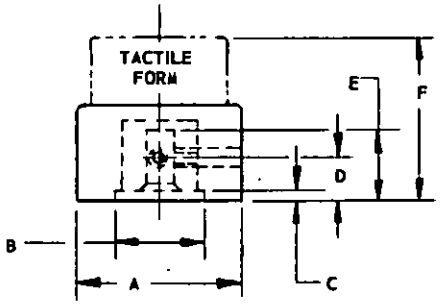

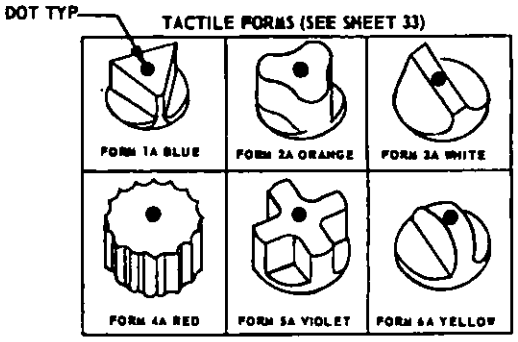


TABLE LXXIV - ROUND TACTILE SLIP - CLUTCH KNOBS

MS DASH NUMBER	SERIES	A +0.030 -0.010	NUT CLEARANCE B MIN	NUT CLEARANCE C MIN	D MAX	SHAFT HOLE DEPTH E MIN	F ±0.050	SET SCREWS (2 REQ'D) 1/8 AND 5/32 SHAFT HOLE	SET SCREWS (2 REQ'D) 1/4 SHAFT HOLE	CLUTCH SLIP TORQUE INCH-OUNCES
SEE	1	0.715	0.485	0.026	0.187	0.405	0.906	.112-40UNC-3A	.112-40UNC-3A	12 TO 24
TABLE	2	0.915	0.640	0.114	0.270	0.520	1.156	.112-40UNC-3A	.112-40UNC-3A	20 TO 36
LXXV	3	1.250	0.750	0.114	0.280	0.455	1.400	—	.164-32UNC-3A	28 TO 56

TABLE LXXV - MS DASH NUMBER

MS91528 - 2 CW 2 B 5A

SERIES	STYLE	SHAFT HOLE DIAMETER	COLOR	TACTILE FORM
1	CW – TACTILE WITH WHITE DOT	1 – 1/8" ROUND	B – BLACK	1A
2	CX – TACTILE WITH FLUORESCENT DOT	2 – 1/4" ROUND	G – GRAY	2A
3	CY – TACTILE WITH PHOSPHORESCENT DOT	3 – 1/8" "D" FLAT	R – RED	3A
		4 – 1/4" "D" FLAT		4A
		6 – 5/32" ROUND		5A
		8 – 5/32" "D" FLAT		6A

NOTES:
1. FOR TACTILE FORM DIMENSIONS SEE SHEET 33.
2. FOR GENERAL NOTES SEE SHEET 47.

NEW SHEET ADDED

APPROVED 2 DEC 1955 REVISED (1) For changes see sheets 15, 16, 29, 37, and 42


User activities:
Navy – CG, OS

Review activities:
Army – MI, AT, AV, EA, ME
Navy – MC, AS
DLA – IS


This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. EC Other Cust ER 11	TITLE: KNOBS–CONTROL, PLASTIC (ROUND, CONCENTRIC, POINTER, SPINNER, SPINNER SLIP–CLUTCH, BAR, TACTILE, KNOB LOCK POINTER, SLIP–CLUTCH, AND KNOB LOCKS)	MILITARY STANDARD MS91528
PROCUREMENT SPECIFICATION MIL-K-3926	SUPERSEDES:	SHEET 44 OF 47


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:22Z
Check the source to verify that this is the current version before use.

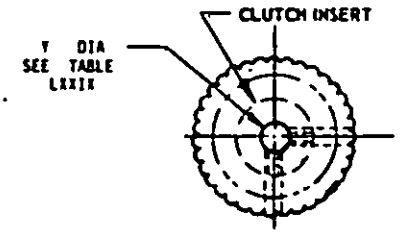

TOP VIEW SHOWING ROUND SHAFT HOLE

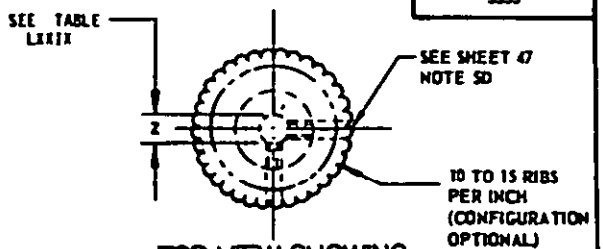

TOP VIEW SHOWING "D" FLAT SHAFT HOLE

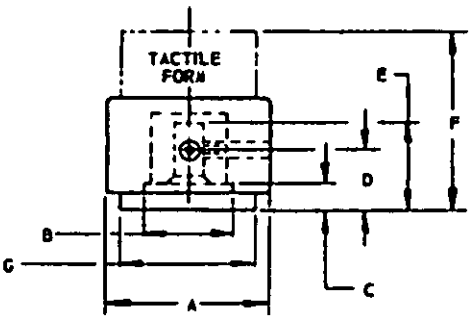

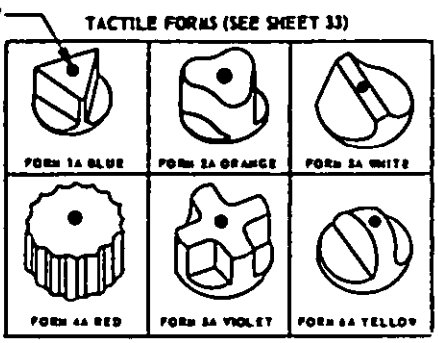


TABLE LXXVI - ROUND RING SKIRT TACTILE SLIP - CLUTCH KNOBS

MS DASH NUMBER	SERIES	A ±0.030 -0.010	NUT CLEARANCE B MIN	NUT CLEARANCE C MIN	D MAX	SHAFT HOLE DEPTH E MIN	F ±0.050	G MAX	SET SCREWS (2 REQ'D) 1/8 AND 5/32 SHAFT HOLE	SET SCREWS (2 REQ'D) 1/4" SHAFT HOLE	CLUTCH SLIP TORQUE INCH-OUNCES
SEE TABLE LXXVII	1	0.715	0.485	0.188	0.369	0.568	1.075	0.695	.112-40UNC-3A	.112-40UNC-3A	12 TO 24
	2	0.915	0.640	0.320	0.434	0.730	1.375	0.845	.112-40UNC-3A	.112-40UNC-3A	20 TO 36
	3	1.250	0.750	0.250	0.440	0.605	1.575	1.185	---	.164-32UNC-3A	28 TO 56

TABLE LXXVII - MS DASH NUMBER

MS91528 - 2 CZ 2 B 5A

SERIES	STYLE	SHAFT HOLE DIAMETER	COLOR	TACTILE FORM
1	CZ - TACTILE WITH WHITE DOT	1 - 1/8" ROUND	B - BLACK	1A
2	DA - TACTILE WITH FLUORESCENT DOT	2 - 1/4" ROUND	G - GRAY	2A
3	DB - TACTILE WITH PHOSPHORESCENT DOT	3 - 1/8" "D" FLAT	R - RED	3A
		4 - 1/4" "D" FLAT		4A
		6 - 5/32" ROUND		5A
		8 - 5/32" "D" FLAT		6A

NOTES:
1. FOR TACTILE CAP DIMENSIONS SEE SHEET 33.
2. FOR GENERAL NOTES SEE SHEET 47.

NEW SHEET ADDED

P.A. EC Other Cont ER 11	TITLE KNOBS-CONTROL, PLASTIC (ROUND, CONCENTRIC, POINTER, SPINNER, SPINNER SLIP-CLUTCH, BAR, TACTILE, KNOB LOCK POINTER, SLIP-CLUTCH, AND KNOB LOCKS)	MILITARY STANDARD MS91528
PROCUREMENT SPECIFICATION MIL-K-3926	SUPERSEDES	SHEET 45 OF 47

DD FORM 1 MAR 72 672-1 (Coordinated)


PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

APPROVED 2 DEC 1955 REVISED ⓒ For changes see sheets 15, 16, 29, 37, and 42

Review activities:
Army - AI, AT, AV, EA, ME, MI, SM
Navy - MC, AS
DLA - IS

User activities:
Navy - CG, OS

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetition use shall be made from this document.

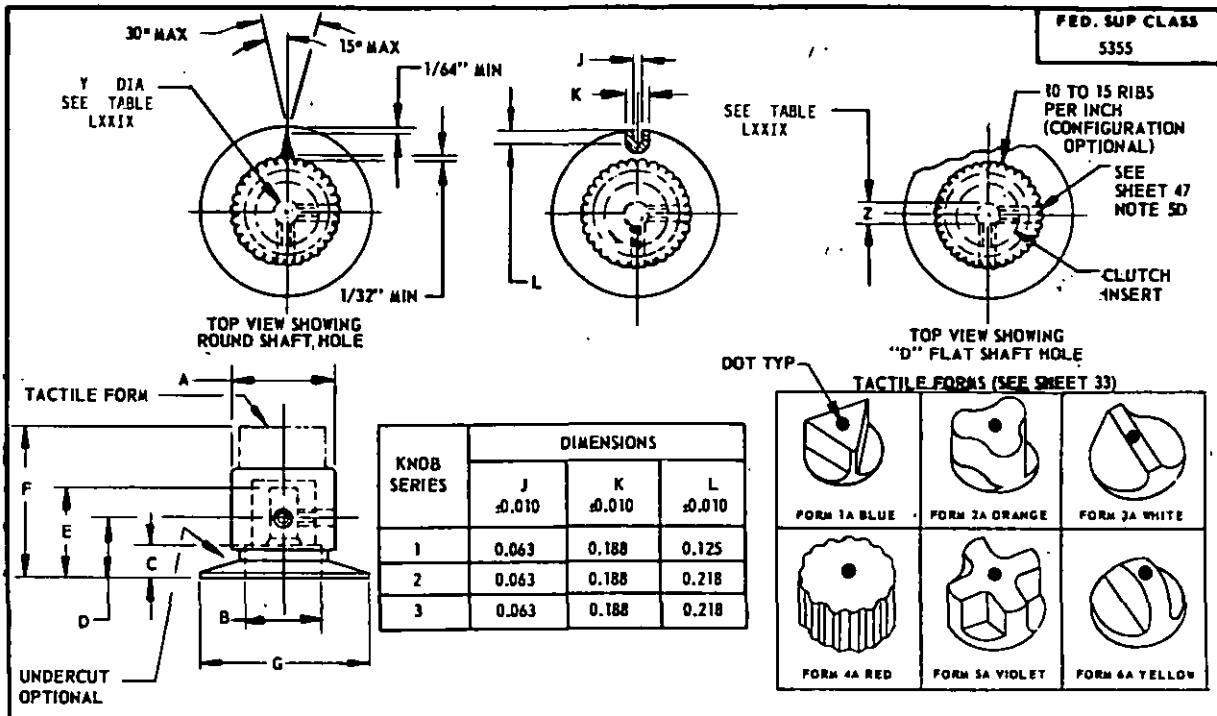

KNOB SERIES	DIMENSIONS		
	J ±0.010	K ±0.010	L ±0.010
1	0.063	0.188	0.125
2	0.063	0.188	0.218
3	0.063	0.188	0.218

TABLE LXXVIII - ROUND DIAL SKIRT TACTILE SLIP-CLUTCH KNOBS

MS DASH NUMBER	SERIES	A +0.030 -0.010	NUT CLEARANCE		D MAX	SHAFT HOLE DEPTH	F ±0.050	G MAX	SET SCREWS (2 REQ'D).		CLUTCH SLIP TORQUE
			B MIN	C MIN		E MIN			1/8 AND 5/32 SHAFT HOLE	1/4" SHAFT HOLE	INCH-OUNCES
SEE TABLE LXXIX	1	0.715	0.485	0.050	0.369	0.568	1.093	1.150	.112-40UNC-3A	.112-40UNC-3A	12 TO 24
	2	0.915	0.590	0.320	0.484	0.730	1.375	1.525	.112-40UNC-3A	.112-40UNC-3A	20 TO 36
	3	1.250	0.750	0.250	0.440	0.605	1.575	1.837	--	.164-32UNC-3A	28 TO 56

TABLE LXXIX - MS DASH NUMBER

MS91528 - 2 DC 2 B 5A

SERIES	STYLE	SHAFT HOLE DIAMETER	COLOR	TACTILE FORM
1	DC – SKIRT WHITE ARROW, TACTILE WHITE DOT	1 - 1/8" ROUND	B – BLACK	1A
2	DE – SKIRT NO ARROW, TACTILE WHITE DOT	2 - 1/4" ROUND	G – GRAY	2A
3	DF – SKIRT WITH SLOT, TACTILE WHITE DOT	3 - 1/8" "D" FLAT	R – RED	3A
	DG – SKIRT BACKLIGHTED WHITE ARROW, TACTILE OPAQUE WHITE DOT	4 - 1/4" "D" FLAT		4A
	DH – SKIRT FLUORESCENT ARROW, TACTILE FLUORESCENT DOT	6 - 5/32" ROUND		5A
	DI – SKIRT PHOSPHORESCENT ARROW, TACTILE PHOSPHORESCENT DOT	8 - 5/32" "D" FLAT		6A

NOTES:
1. STYLE DG ARROW-BACKLIGHTED SHALL BE IN ACCORDANCE WITH MIL-P-7788. STYLE DH AND DI KNOBS-THERMAL SHOCK SHALL BE IN ACCORDANCE WITH TEST CONDITION A, METHOD 107 OF MIL-STD-202.
2. FOR TACTILE FORM DIMENSIONS SEE SHEET 33.
3. FOR GENERAL NOTES SEE SHEET 47.

NEW SHEET ADDED

APPROVED 2 DEC 1955 REVISED ⓓ For changes see sheets 15, 16, 29, 37, and 42

User activities: Navy – CG, OS

Review activities: Army – MI, AT, AV, EA, ME, Navy – MC, AS, DLA – IS

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. EC	TITLE KNOBS—CONTROL, PLASTIC (ROUND, CONCENTRIC, POINTER, SPINNER, SPINNER SLIP-CLUTCH, BAR, TACTILE, KNOB LOCK POINTER, SLIP-CLUTCH, AND KNOB LOCKS)	MILITARY STANDARD
Other Cust ER 11		MS91528
PROCUREMENT SPECIFICATION MIL-K-3926	SUPERSEDES:	SHEET 46 OF 47

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:22Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: FOR SHEETS 43 THRU 46		
DASH NO.	TESTS, MIL-K-3926	EXTENT OF APPROVAL
1DC2B4A 3DF2B5A	TABLE II GROUPS I, II, III, IV, V, VI AND VII	ALL

IF PART NUMBER SPECIFIED IS NOT MANUFACTURED, REQUEST ALTERNATE NUMBER FROM GOVERNMENT.

TABLE LXXIX - SHAFT HOLE DIMENSIONS FOR SHAFT SIZES.

SHAFT SIZE	SHAFT DIA "Y" +0.002 -0.000	"D" FLAT "Z" +0.005 -0.000
5/64"	0.080	0.069
1/8"	0.127	0.107
5/32"	0.158	0.129
1/4"	0.252	0.222

NOTES:
4. DIMENSIONS. ALL DIMENSIONS IN INCHES, TOLERANCES AS SHOWN.
5. DESIGN. SCREW LOCATION:
   A. ALL KNOB SERIES "0 THRU 5" SHALL HAVE TWO SET SCREWS LOCATED 90° TO 125° APART.
   B. KNOBS WITH SET SCREWS POSITIONED OPPOSITE TO "D" FLAT; THE SET SCREW ANGLE SHALL BE SYMMETRICAL WITH RESPECT TO "D" FLAT.
   C. KNOBS WITH A SET SCREW FACING THE "D" FLAT; THAT SET SCREW SHALL BE REFERENCE FOR SET SCREW ANGLE MEASUREMENT.
   D. SET SCREW ACCESS HOLES: (APPLIES TO SLIP-CLUTCH KNOBS ON SHEETS 37 THRU 46) SLIP-CLUTCH KNOBS SHALL EMPLOY A DETENT TYPE MECHANISM. THE DETENT POSITIONS SHALL BE EQUALLY SPACED. SET SCREW ACCESS HOLES SHALL ALIGN WITH THE TWO SET SCREWS IN AT LEAST ONE OF THE DETENT POSITIONS. AT LEAST ONE SET SCREW ACCESS HOLE SHALL ALIGN WITH ONE SET SCREW WHEN THE CLUTCH IS IN ANY DETENT POSITION.
6. COLOR. APPLIES TO ALL KNOBS EXCEPT THOSE ON SHEET 33.
   UNLESS OTHERWISE SPECIFIED, COLORS SHALL BE IN ACCORDANCE WITH REQUIREMENTS OF FED-STD-595.
   KNOB: BLACK LUSTERLESS, COLOR NUMBER 37038.
   GRAY LUSTERLESS, COLOR NUMBER 36231.
   RED LUSTERLESS, COLOR NUMBER 31136.
   INDICIA: WHITE LUSTERLESS, COLOR NUMBER 37875.
   GREEN FLUORESCENT TO CONFORM TO MIL-L-3891, TYPE F.
   GREEN PHOSPHORESCENT TO CONFORM TO MIL-L-3891, TYPE P.
   GREEN TO YELLOW-GREEN PHOSPHORESCENT TO CONFORM TO TT-P-54, TYPE 1.
7. MODIFIED KNOBS SHALL MEET REQUIREMENTS OF MIL-K-3926.
8. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS OR REQUEST FOR PROPOSAL. EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF ISSUE ADOPTED.

NEW SHEET ADDED

For changes see sheets 15, 16, 29, 37, and 42

APPROVED 2 DEC 1955 REVISED

User activities:
Navy - CG, OS

Review activities:
Army - MI, AT, AV, EA, ME
Navy - MC, AS
DLA - IS

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Detailing for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. EC Other Cust ER 11	TITLE KNOBS-CONTROL, PLASTIC (ROUND, CONCENTRIC, POINTER, SPINNER, SPINNER SLIP-CLUTCH, BAR, TACTILE, KNOB LOCK POINTER, SLIP-CLUTCH, AND KNOB LOCKS)	MILITARY STANDARD MS 91528
PROCUREMENT SPECIFICATION MIL-K-3926	SUPERSEDES	SHEET 47 OF 47

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆U.S. GOVERNMENT PRINTING OFFICE: 1984—789-040/A1568

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:22Z
Check the source to verify that this is the current version before use.